



**FCC CFR47 PART 15 SUBPART C**

**Bluetooth Low Energy**

**CERTIFICATION TEST REPORT**

**FOR**

**WCDMA/LTE Wrist device + BT/BLE and DTS b/g/n**

**MODEL NUMBER : SM-R815F, SM-R815N**

**FCC ID: A3LSMR815F**

**REPORT NUMBER: 4788542024-E2V2**

**ISSUE DATE: JUL 19, 2018**

*Prepared for*  
**SAMSUNG ELECTRONICS CO., LTD.**  
**129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,**  
**GYEONGGI-DO, 16677, KOREA**

*Prepared by*  
**UL Korea, Ltd.**  
**26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea**

**Suwon Test Site: UL Korea, Ltd. Suwon Laboratory**  
**218 Maeyeong-ro, Yeongtong-gu,**  
**Suwon-si, Gyeonggi-do, 16675, Korea**  
**TEL: (031) 337-9902**  
**FAX: (031) 213-5433**



**TL-637**

Revision History

| Rev. | Issue Date | Revisions                         | Revised By  |
|------|------------|-----------------------------------|-------------|
| V1   | 07/13/18   | Initial issue                     | Junwhan Lee |
| V2   | 07/19/18   | Updated to address TCB's question | Junwhan Lee |

## TABLE OF CONTENTS

|                                                |           |
|------------------------------------------------|-----------|
| <b>1. ATTESTATION OF TEST RESULTS .....</b>    | <b>5</b>  |
| 1.1. INTRODUCTION OF TEST DATA REUSE .....     | 6         |
| 1.2. DIFFERENCE .....                          | 6         |
| 1.3. SPOT CHECK VERIFICATION DATA .....        | 6         |
| 1.4. REFERENCE DETAIL .....                    | 7         |
| <b>2. TEST METHODOLOGY .....</b>               | <b>8</b>  |
| <b>3. FACILITIES AND ACCREDITATION .....</b>   | <b>8</b>  |
| <b>4. CALIBRATION AND UNCERTAINTY .....</b>    | <b>8</b>  |
| 4.1. MEASURING INSTRUMENT CALIBRATION .....    | 8         |
| 4.2. SAMPLE CALCULATION .....                  | 8         |
| 4.3. MEASUREMENT UNCERTAINTY .....             | 9         |
| <b>5. EQUIPMENT UNDER TEST .....</b>           | <b>10</b> |
| 5.1. DESCRIPTION OF EUT .....                  | 10        |
| 5.2. MAXIMUM OUTPUT POWER .....                | 10        |
| 5.3. DESCRIPTION OF AVAILABLE ANTENNAS .....   | 10        |
| 5.4. WORST-CASE CONFIGURATION AND MODE .....   | 10        |
| 5.5. DESCRIPTION OF TEST SETUP .....           | 11        |
| <b>6. TEST AND MEASUREMENT EQUIPMENT .....</b> | <b>13</b> |
| <b>7. REFERENCE MEASUREMENT RESULTS .....</b>  | <b>14</b> |
| 7.1. ON TIME AND DUTY CYCLE RESULTS .....      | 14        |
| 7.2. 99% BANDWIDTH .....                       | 15        |
| <b>8. MEASUREMENT METHODS .....</b>            | <b>17</b> |
| <b>9. SUMMARY TABLE .....</b>                  | <b>18</b> |
| <b>10. ANTENNA PORT TEST RESULTS .....</b>     | <b>19</b> |
| 10.1. 6 dB BANDWIDTH .....                     | 19        |
| 10.2. OUTPUT POWER .....                       | 21        |
| 10.3. AVERAGE POWER .....                      | 23        |
| 10.4. PSD .....                                | 24        |
| 10.5. OUT-OF-BAND EMISSIONS .....              | 26        |
| <b>11. RADIATED TEST RESULTS .....</b>         | <b>30</b> |

---

|       |                                         |    |
|-------|-----------------------------------------|----|
| 11.1. | LIMITS AND PROCEDURE.....               | 30 |
| 11.2. | TRANSMITTER ABOVE 1 GHz.....            | 32 |
| 11.3. | WORST-CASE BELOW 1 GHz .....            | 42 |
| 12.   | AC POWER LINE CONDUCTED EMISSIONS ..... | 44 |
| 13.   | SETUP PHOTOS .....                      | 49 |

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SAMSUNG ELECTRONICS CO., LTD.

**EUT DESCRIPTION:** WCDMA/LTE Wrist device + BT/BLE and DTS b/g/n

**MODEL NUMBER:** SM-R815F, SM-R815N

**SERIAL NUMBER:** R3AK40021AW (RADIATED, Original);  
R3AK4000216M (CONDUCTED, Original)  
R3AK5006LET (Spot check)

**DATE TESTED:** MAY 16, 2018 - JUN 14, 2018 (Original)  
JUN 27, 2018 (Spot check)

| APPLICABLE STANDARDS     |              |
|--------------------------|--------------|
| STANDARD                 | TEST RESULTS |
| CFR 47 Part 15 Subpart C | Pass         |

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Korea, Ltd. By:

Tested By:



SungGil Park  
Suwon Lab Engineer  
UL Korea, Ltd.



Junwhan Lee  
Suwon Lab Engineer  
UL Korea, Ltd.

## 1.1. INTRODUCTION OF TEST DATA REUSE

This report referenced from the FCC ID: A3LSMR815U DTS BLE(FCC CFR 47 Part 15C). And the applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID.

## 1.2. DIFFERENCE

The FCC ID: A3LSMR815F shares the same enclosure and circuit board as FCC ID: A3LSMR815U. The BLE antennas and surrounding circuitry and layout are identical between these two units.

After confirming through preliminary radiated emissions that the performance of the FCC ID: A3LSMR815U remains representative of FCC ID: A3LSMR815F. The test data of FCC ID: A3LSMR815U being submitted for this application to cover BLE features.

Model number "SM-R815F" was used for the spot check test.

## 1.3. SPOT CHECK VERIFICATION DATA

| Band                | Test Item | Frequency | Test Limit | Original model      | Spot check model    | Deviation | Remark      |
|---------------------|-----------|-----------|------------|---------------------|---------------------|-----------|-------------|
|                     |           |           |            | SM-R815U            | SM-R815F            |           |             |
|                     |           |           |            | FCC ID : A3LSMR815U | FCC ID : A3LSMR815F |           |             |
| DTS BLE<br>(2.4GHz) | Band Edge | 2480 MHz  | 54 dBuV/m  | 44.88 dBuV/m        | 44.60 dBuV/m        | -0.28 dB  |             |
|                     | RSE       | 2440 MHz  | 74 dBuV/m  | 40.53 dBuV/m        | 40.34 dBuV/m        | -0.19 dB  | Noise Floor |

Comparison of two models, upper deviation is within 3dB range and all test results are under FCC Technical Limits.

## 1.4. REFERENCE DETAIL

Reference application that contains the reused reference data.

| Equipment Class | Reference FCC ID | Type Grant/ Permissive Change | Reference Application | Folder Test/RF Exposure | Report Title / Section             |
|-----------------|------------------|-------------------------------|-----------------------|-------------------------|------------------------------------|
| DTS             | A3LSMR815U       | Grant                         | 4788480988-E1V1       | Test                    | FCC Report DTS WLAN / All sections |
|                 |                  |                               | 4788480988-E2V1       | Test                    | FCC Report BLE All sections        |
| DSS             | A3LSMR815U       | Grant                         | 4788480988-E3V1       | Test                    | FCC Report BT / All sections       |

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. KDB 558074 D01 DTS Meas Guidance v04.
4. ANSI C63.10-2013.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

| 218 Maeyeong-ro                               |
|-----------------------------------------------|
| <input type="checkbox"/> Chamber 1            |
| <input type="checkbox"/> Chamber 2            |
| <input checked="" type="checkbox"/> Chamber 3 |

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER                             | UNCERTAINTY |
|---------------------------------------|-------------|
| Conducted Disturbance, 0.15 to 30 MHz | 2.32 dB     |
| Radiated Disturbance, Below 1GHz      | 3.86 dB     |
| Radiated Disturbance, Above 1 GHz     | 5.97 dB     |

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a WCDMA/LTE Wrist device + BT/BLE and DTS b/g/n.  
This test report addresses the DTS (BLE) operational mode.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted output power as follows:

| Frequency Range [MHz] | Mode | Power Mode | Output Power [dBm] | Output Power [mW] |
|-----------------------|------|------------|--------------------|-------------------|
| 2402 - 2480           | BLE  | Peak       | 7.158              | 5.20              |
|                       |      | Average    | 6.710              | 4.69              |

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an internal antenna, with a maximum gain of -5.2 dBi.

### 5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation.

Note : All radiated and power line conducted tests were performed connected with earphone and charger for evaluation of worst case mode.

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

| Support Equipment List |              |            |                |            |
|------------------------|--------------|------------|----------------|------------|
| Description            | Manufacturer | Model      | Serial Number  | FCC ID     |
| Adapter                | SAMSUNG      | EP-TA60EBE | R37K4Q17VG3RT3 | N/A        |
| Wireless Charger       | SAMSUNG      | EP-YO805   | N/A            | A3LEPYO805 |
| Data cable             | SAMSUNG      | ECB-DU2EBE | N/A            | N/A        |


### I/O CABLES

| I/O Cable List |          |                      |                |             |                  |         |
|----------------|----------|----------------------|----------------|-------------|------------------|---------|
| Cable No       | Port     | # of identical ports | Connector Type | Cable Type  | Cable Length (m) | Remarks |
| 1              | DC Power | 1                    | Mini-USB       | Un-Shielded | 1 m              | N/A     |


### TEST SETUP

The EUT is a stand-alone unit during the tests.  
Test software in hidden menu exercised the EUT to enable BLE mode.

**SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)**

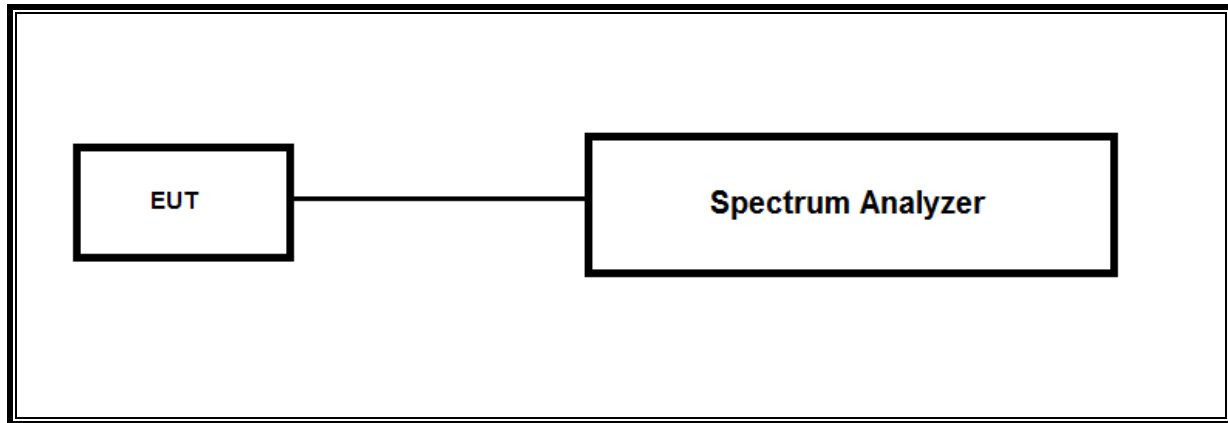

**SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)**

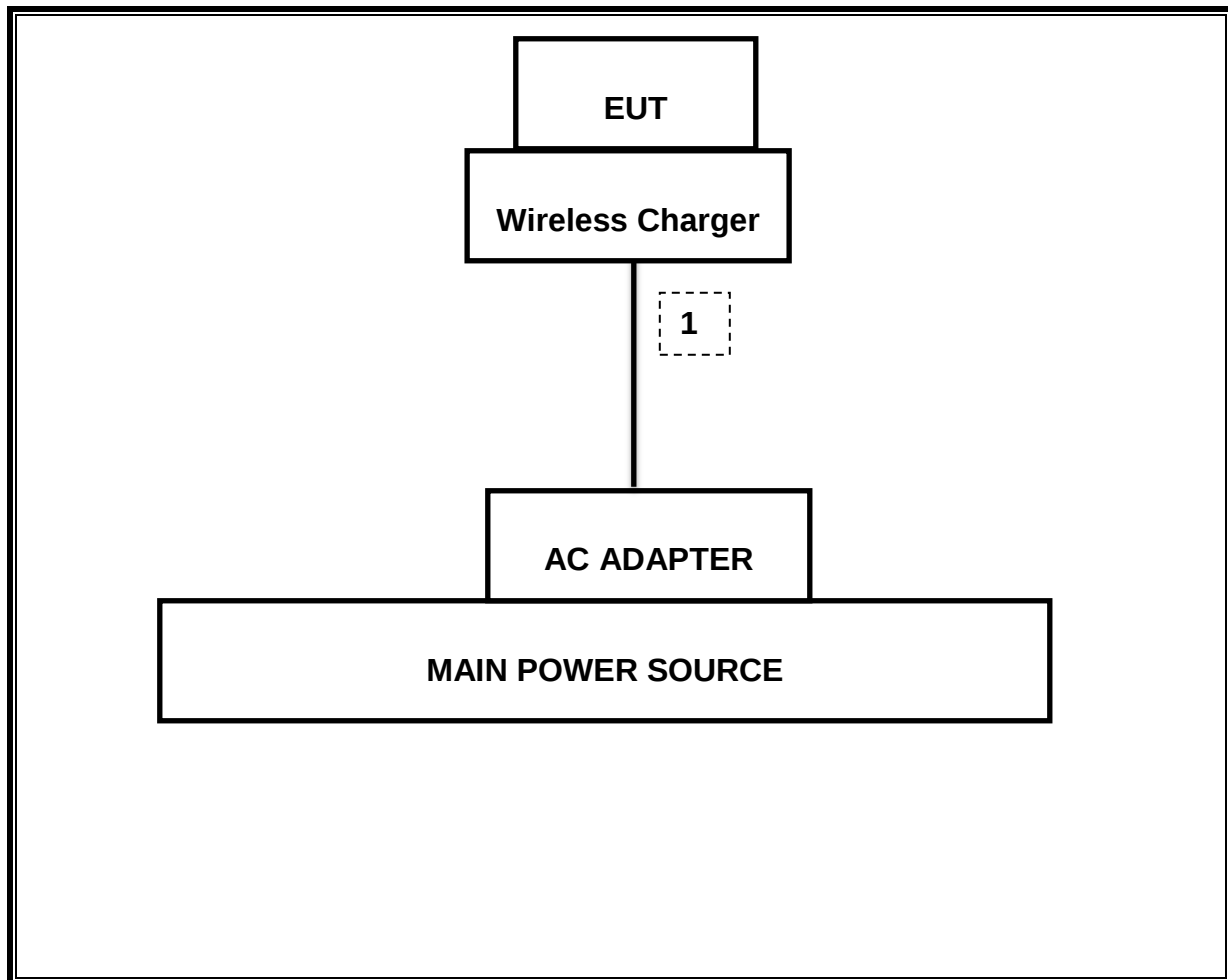

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| Test Equipment List        |               |                        |            |          |
|----------------------------|---------------|------------------------|------------|----------|
| Description                | Manufacturer  | Model                  | S/N        | Cal Due  |
| Antenna, Bilog, 30MHz-1GHz | SCHWARZBECK   | VULB9163               | 750        | 08-31-19 |
| Antenna, Bilog, 30MHz-1GHz | SCHWARZBECK   | VULB9163               | 749        | 09-14-19 |
| Antenna, Bilog, 30MHz-1GHz | SCHWARZBECK   | VULB9163               | 845        | 08-31-19 |
| Antenna, Horn, 18 GHz      | ETS           | 3115                   | 00167211   | 10-14-18 |
| Antenna, Horn, 18 GHz      | ETS           | 3115                   | 00161451   | 03-10-19 |
| Antenna, Horn, 18 GHz      | ETS           | 3117                   | 00168724   | 05-31-19 |
| Antenna, Horn, 18 GHz      | ETS           | 3117                   | 00168717   | 05-31-19 |
| Antenna, Horn, 18 GHz      | ETS           | 3117                   | 00205959   | 11-29-18 |
| Antenna, Horn, 40 GHz      | ETS           | 3116C                  | 00166155   | 12-04-19 |
| Antenna, Horn, 40 GHz      | ETS           | 3116C                  | 00168645   | 12-04-19 |
| Antenna, Horn, 40 GHz      | ETS           | 3116C-PA               | 00168841   | 11-13-19 |
| Preamplifier, 1000 MHz     | Sonoma        | 310N                   | 341282     | 08-09-18 |
| Preamplifier, 1000 MHz     | Sonoma        | 310N                   | 351741     | 08-07-18 |
| Preamplifier, 1000 MHz     | Sonoma        | 310N                   | 370599     | 08-10-18 |
| Preamplifier, 18 GHz       | Miteq         | AFS42-00101800-25-S-42 | 1876511    | 08-08-18 |
| Preamplifier, 18 GHz       | Miteq         | AFS42-00101800-25-S-42 | 1896138    | 08-08-18 |
| Preamplifier, 18 GHz       | Miteq         | AFS42-00101800-25-S-42 | 2029169    | 08-11-18 |
| Spectrum Analyzer, 44 GHz  | Agilent / HP  | N9030A                 | MY54170614 | 08-08-18 |
| Spectrum Analyzer, 44 GHz  | Agilent / HP  | N9030A                 | MY54490312 | 08-08-18 |
| Average Power Sensor       | Agilent / HP  | U2000                  | MY54270007 | 08-08-18 |
| Attenuator                 | PASTERNAK     | PE7087-10              | A001       | 08-08-18 |
| Attenuator                 | PASTERNAK     | PE7087-10              | A008       | 08-08-18 |
| Attenuator                 | PASTERNAK     | PE7087-10              | 2          | 08-10-18 |
| EMI Test Receive, 40 GHz   | R&S           | ESU40                  | 100439     | 08-08-18 |
| EMI Test Receive, 40 GHz   | R&S           | ESU40                  | 100457     | 08-08-18 |
| EMI Test Receive, 44 GHz   | R&S           | ESW44                  | 101590     | 08-09-18 |
| EMI Test Receive, 3 GHz    | R&S           | ESR3                   | 101832     | 08-07-18 |
| Low Pass Filter 5GHz       | Micro-Tronics | LPS17541               | 009        | 08-08-18 |
| Low Pass Filter 5GHz       | Micro-Tronics | LPS17541               | 015        | 08-08-18 |
| Low Pass Filter 5GHz       | Micro-Tronics | LPS17541               | 020        | 08-11-18 |
| High Pass Filter 3GHz      | Micro-Tronics | HPM17543               | 010        | 08-08-18 |
| High Pass Filter 3GHz      | Micro-Tronics | HPM17543               | 015        | 08-08-18 |
| High Pass Filter 3GHz      | Micro-Tronics | HPM17543               | 020        | 08-11-18 |
| High Pass Filter 6GHz      | Micro-Tronics | HPS17542               | 009        | 08-08-18 |
| High Pass Filter 6GHz      | Micro-Tronics | HPS17542               | 016        | 08-08-18 |
| High Pass Filter 6GHz      | Micro-Tronics | HPS17542               | 021        | 08-11-18 |
| LISN                       | R&S           | ENV-216                | 101837     | 08-09-18 |
| UL Software                |               |                        |            |          |
| Description                | Manufacturer  | Model                  | Version    |          |
| Radiated software          | UL            | UL EMC                 | Ver 9.5    |          |
| AC Line Conducted software | UL            | UL EMC                 | Ver 9.5    |          |


## 7. REFERENCE MEASUREMENT RESULTS

### 7.1. ON TIME AND DUTY CYCLE RESULTS

#### LIMITS

None: for reporting purposes only.

| Mode          | ON Time<br>B<br>[msec] | Period<br>[msec] | Duty Cycle<br>x<br>[linear] | Duty<br>Cycle<br>[%] | Duty Cycle<br>Correction Factor<br>[dB] | 1/T<br>Minimum VBW<br>[kHz] |
|---------------|------------------------|------------------|-----------------------------|----------------------|-----------------------------------------|-----------------------------|
| 2400MHz Bands |                        |                  |                             |                      |                                         |                             |
| BLE           | 0.378                  | 0.625            | 0.604                       | 60.4%                | 2.19                                    | 2.649                       |

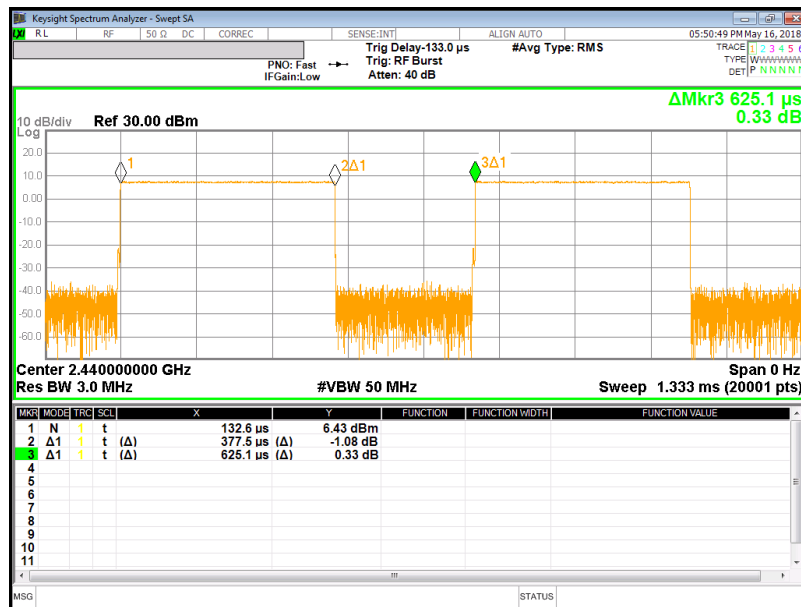

## 7.2. 99% BANDWIDTH

### LIMITS

None; for reporting purposes only.


### TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth and to 1% of the span. The VBW is set to  $\geq 3$  times the RBW. The spectrum analyzer internal 99% bandwidth function is utilized.

### RESULTS

| Channel | Frequency<br>[MHz] | 99% Bandwidth<br>[MHz] |
|---------|--------------------|------------------------|
| Low     | 2402               | 1.050                  |
| Mid     | 2440               | 1.052                  |
| High    | 2480               | 1.060                  |
| Worst   |                    | 1.060                  |

# **99% BANDWIDTH PLOTS**

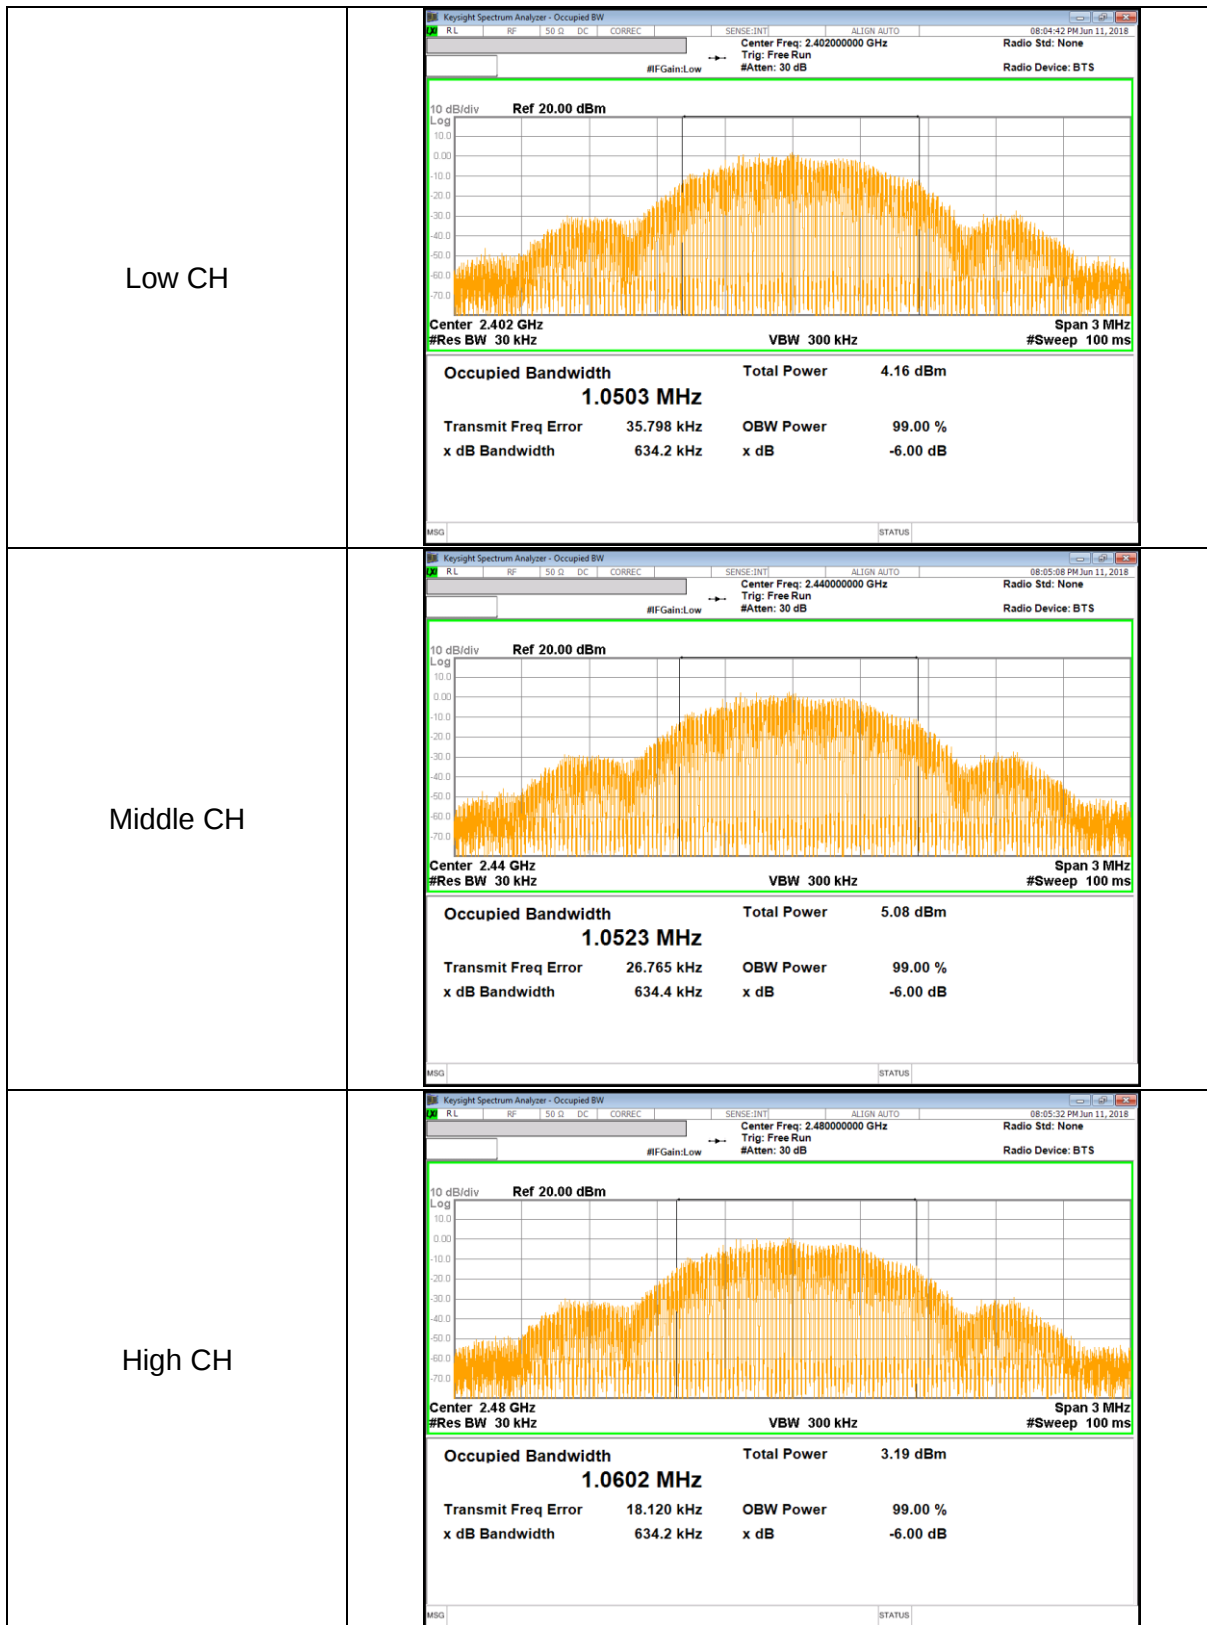

## 8. MEASUREMENT METHODS

6 dB BW : KDB 558074 D01 v04, Section 8.1.

OUTPUT POWER : KDB 558074 D01 v04, Section 9.1.1.

POWER SPECTRAL DENSITY : KDB 558074 D01 v04, Section 10.2.

Out-of-band EMISSIONS (Conducted) : KDB 558074 D01 v04, Section 11.1, 11.2.

Out-of-band EMISSIONS IN NON-RESTRICTED BANDS: KDB 558074 D01 v04, Section 11.0.

Out-of-band EMISSIONS IN RESTRICTED BANDS : KDB 558074 D01 v04, Section 12.1.

AC Power Line Conducted Emission : ANSI C63.10-2013, Section 6.2.

## 9. SUMMARY TABLE

| FCC Part Section   | Test Description                        | Test Limit     | Test Condition       | Test Result |
|--------------------|-----------------------------------------|----------------|----------------------|-------------|
| 15.247 (a)(2)      | Occupied Band width (6dB)               | >500KHz        | Conducted            | Pass        |
| 2.1051, 15.247 (d) | Band Edge / Conducted Spurious Emission | -20dBc         |                      | Pass        |
| 15.247 (b)(3)      | TX conducted output power               | <30dBm         |                      | Pass        |
| 15.247 (e)         | PSD                                     | <8dBm          |                      | Pass        |
| 15.207 (a)         | AC Power Line conducted emissions       | Section 10     | Power Line conducted | Pass        |
| 15.205, 15.209     | Radiated Spurious Emission              | < 54dBuV/m(Av) | Radiated             | Pass        |

## 10. ANTENNA PORT TEST RESULTS

### 10.1. 6 dB BANDWIDTH

#### LIMITS

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.

#### TEST PROCEDURE

Reference to KDB 558074 D01 DTS Meas Guidance v04: The transmitter output is connected to a spectrum analyzer with the RBW set to 100KHz, the VBW  $\geq 3 \times$  RBW, peak detector and max hold.

#### RESULTS

| Channel | Frequency<br>[MHz] | 6 dB Bandwidth<br>[kHz] | Minimum Limit<br>[kHz] |
|---------|--------------------|-------------------------|------------------------|
| Low     | 2402               | 710.84                  | 500.0                  |
| Mid     | 2440               | 720.25                  | 500.0                  |
| High    | 2480               | 723.88                  | 500.0                  |
| Worst   |                    | 710.84                  | 500.0                  |



## 10.2. OUTPUT POWER

### LIMITS

FCC §15.247 (b)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.


### TEST PROCEDURE

Peak power is measured using KDB558074 D01 DTS Meas Guidance v04 under section 9.1.1 utilizing spectrum analyzer.

### RESULTS

| Channel | Frequency<br>[MHz] | Peak Power Reading<br>[dBm] | Limit<br>[dBm] | Margin<br>[dB] |
|---------|--------------------|-----------------------------|----------------|----------------|
| Low     | 2402               | 6.698                       | 30.000         | -23.302        |
| Mid     | 2440               | 7.158                       | 30.000         | -22.842        |
| High    | 2480               | 5.689                       | 30.000         | -24.311        |
| Worst   |                    | 7.158                       | 30.000         | -22.842        |

## OUTPUT POWER PLOTS

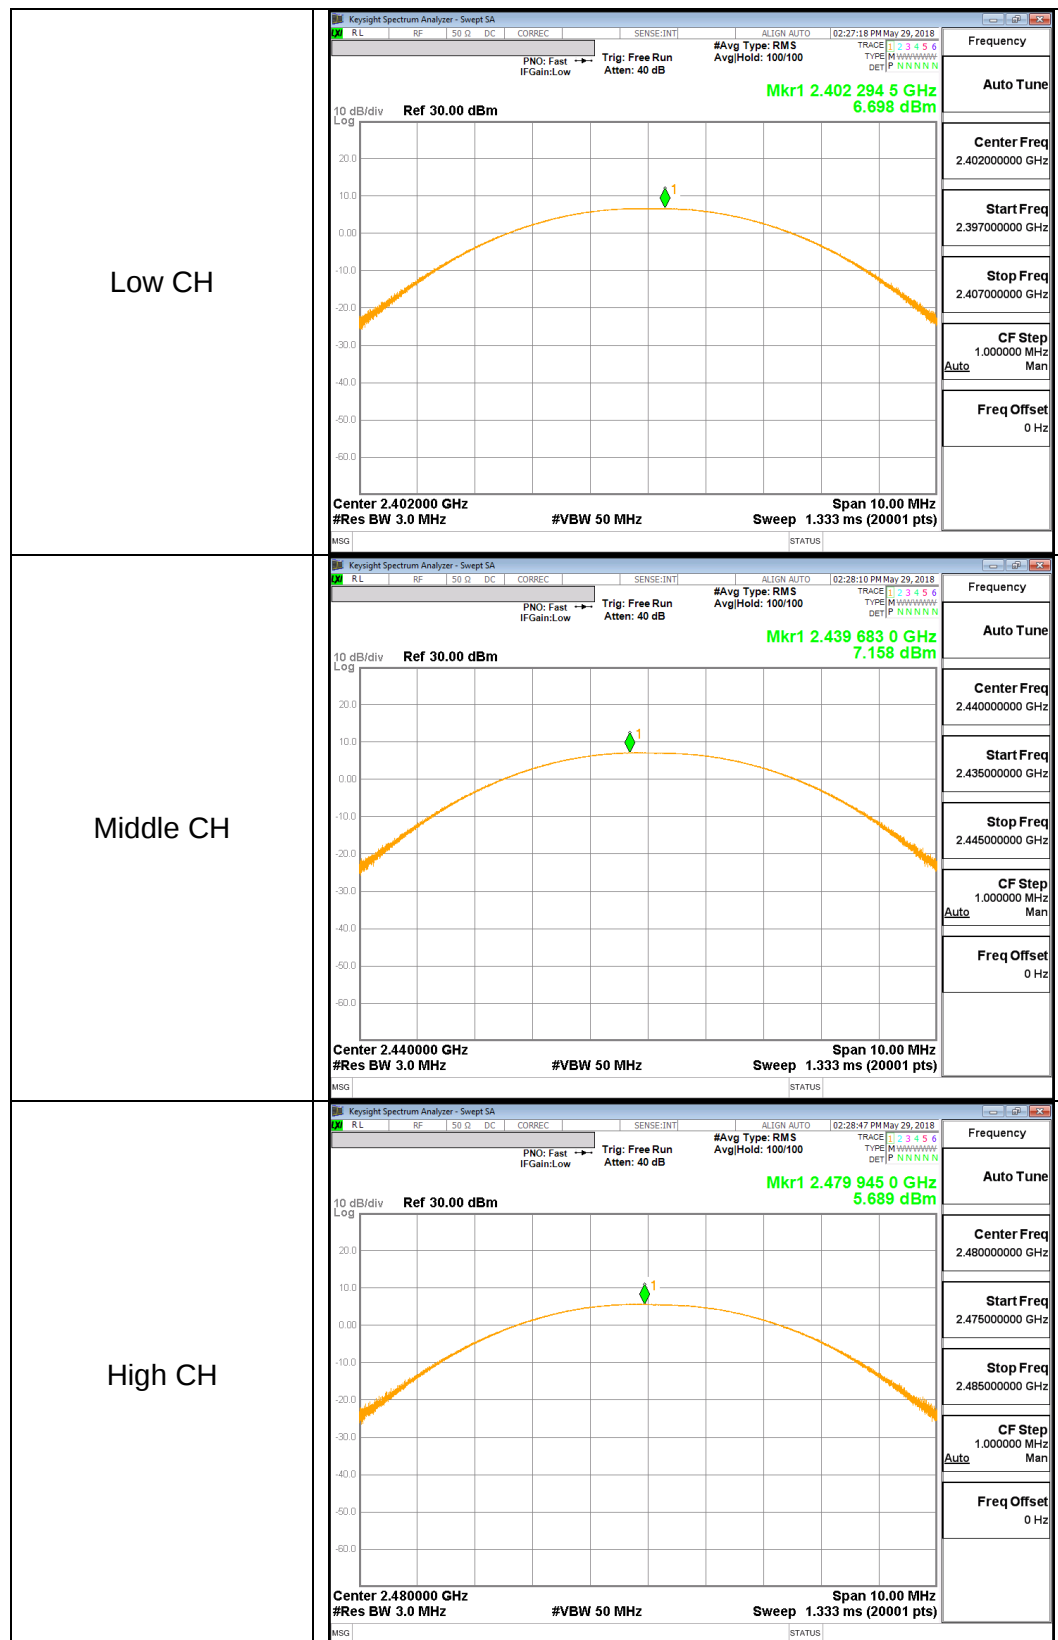

### 10.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

#### RESULTS

The cable assembly insertion loss was entered as an offset in the power meter to allow for direct reading of power.

| Channel | Frequency<br>[MHz] | AV power<br>[dBm] | AV power<br>[mW] |
|---------|--------------------|-------------------|------------------|
| Low     | 2402               | 6.319             | 4.284            |
| Middle  | 2440               | 6.710             | 4.688            |
| High    | 2480               | 5.277             | 3.371            |

## 10.4. PSD

### LIMITS

FCC §15.247

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


### TEST PROCEDURE

Power Spectral Density was performed utilizing the “§10.2 Method PKPSD (Peak PSD)” under KDB558074 D01 DTS Meas Guidance v04

### RESULTS

| Channel | Frequency<br>[MHz] | PSD<br>[dBm/3kHz] | Limit<br>[dBm/3kHz] | Margin<br>[dB] |
|---------|--------------------|-------------------|---------------------|----------------|
| Low     | 2402               | -9.22             | 8.00                | -17.22         |
| Mid     | 2440               | -8.25             | 8.00                | -16.25         |
| High    | 2480               | -10.11            | 8.00                | -18.11         |

## POWER SPECTRAL DENSITY PLOTS

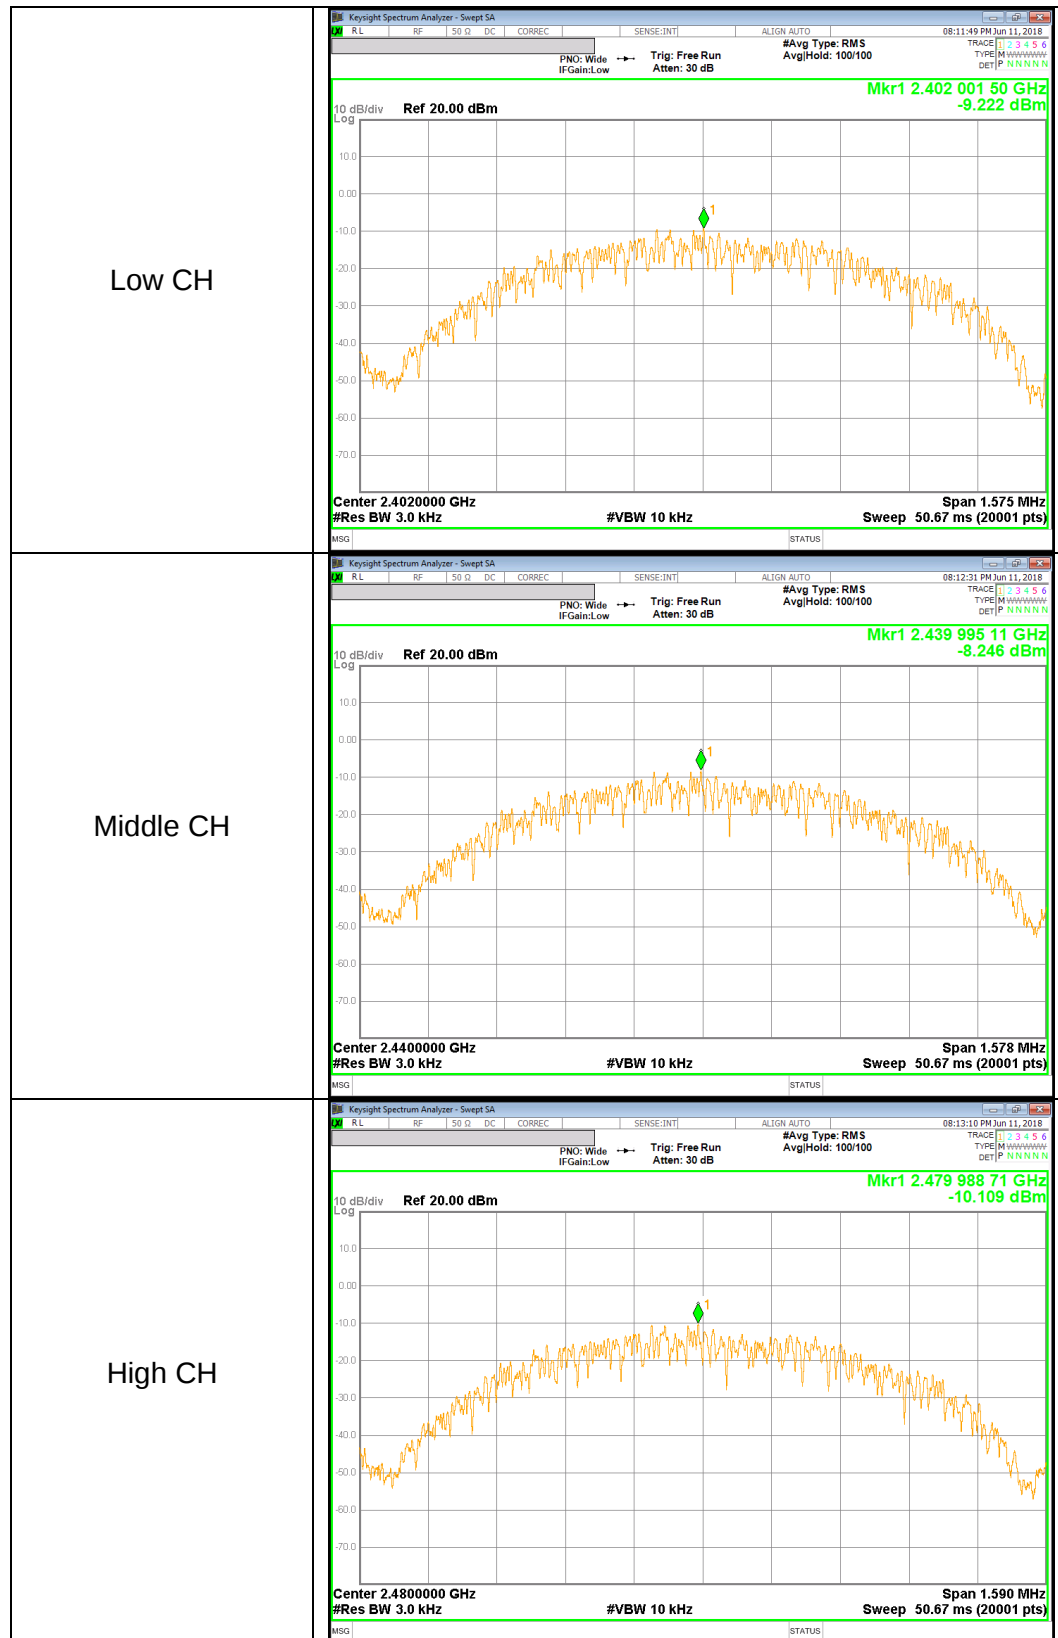

## **10.5. OUT-OF-BAND EMISSIONS**

### **LIMITS**

FCC §15.247 (d)


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

### **TEST PROCEDURE**


The transmitter output is connected to a spectrum analyzer with RBW = 100 kHz, VBW = 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, bandedge (where measurements to the general radiated limits will not be made) and out-of-band emissions.

## RESULTS


### BANDEDGE & SPURIOUS EMISSIONS, LOW CHANNEL

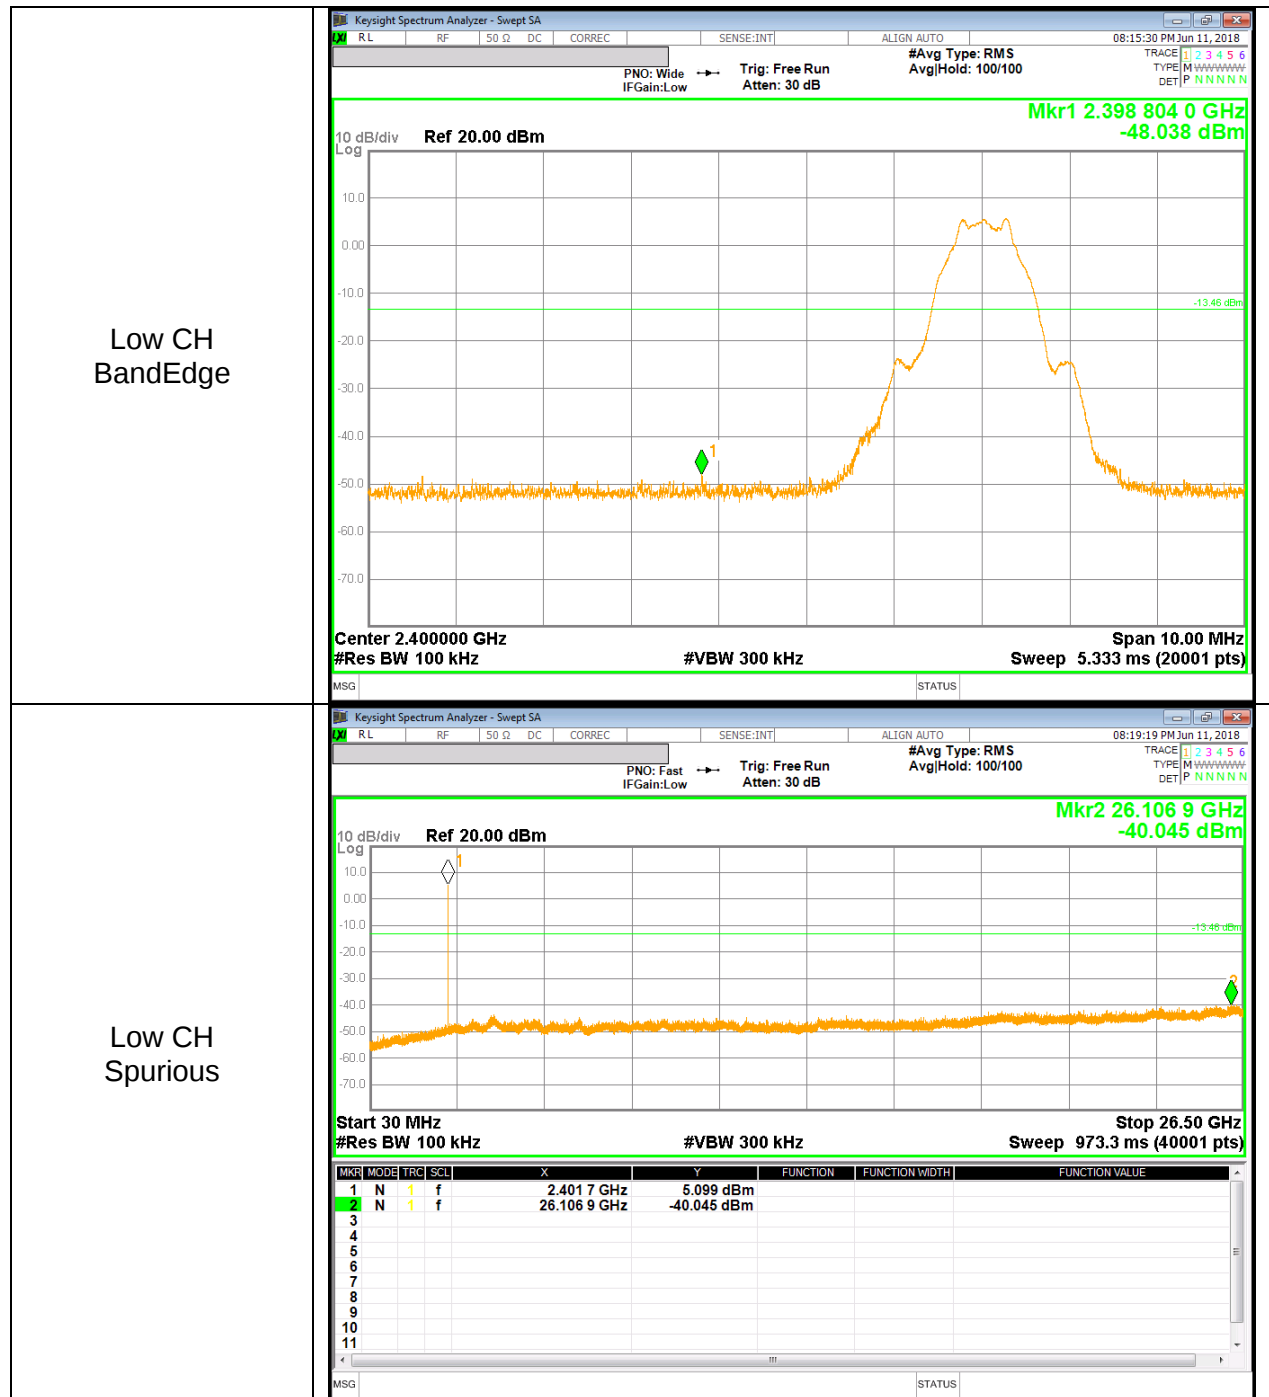

# **SPURIOUS EMISSIONS, MID CHANNEL**

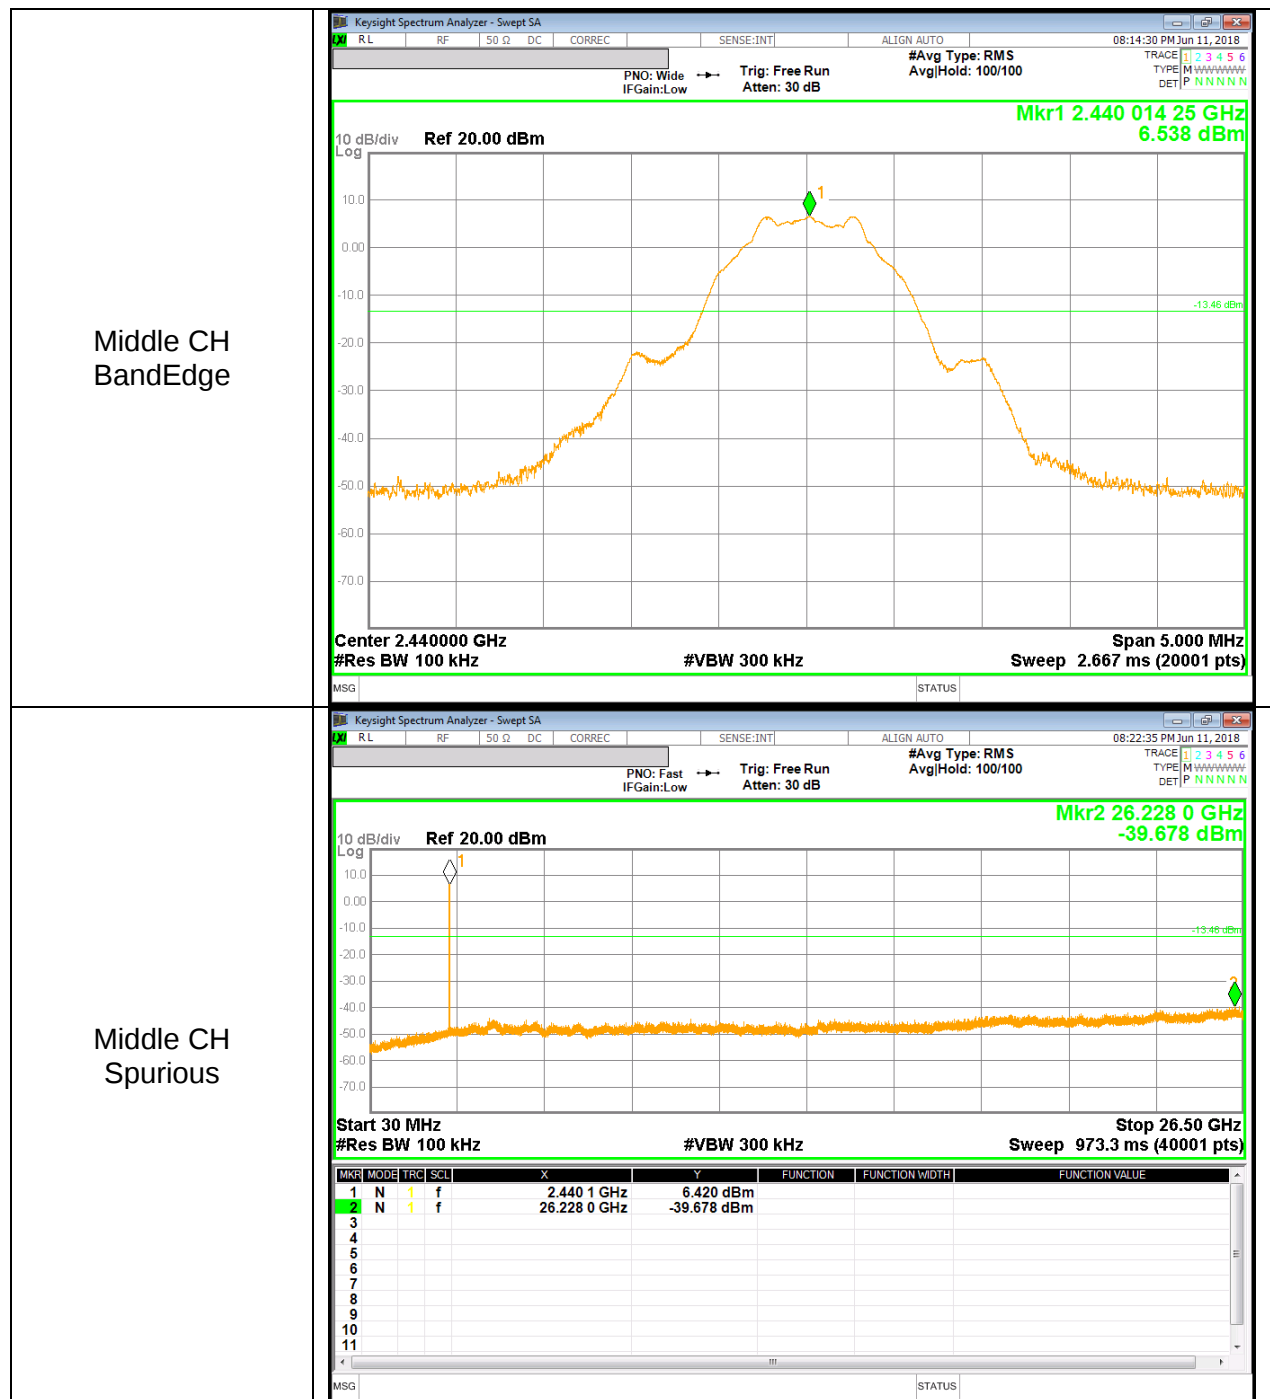

**SPURIOUS EMISSIONS, HIGH CHANNEL**

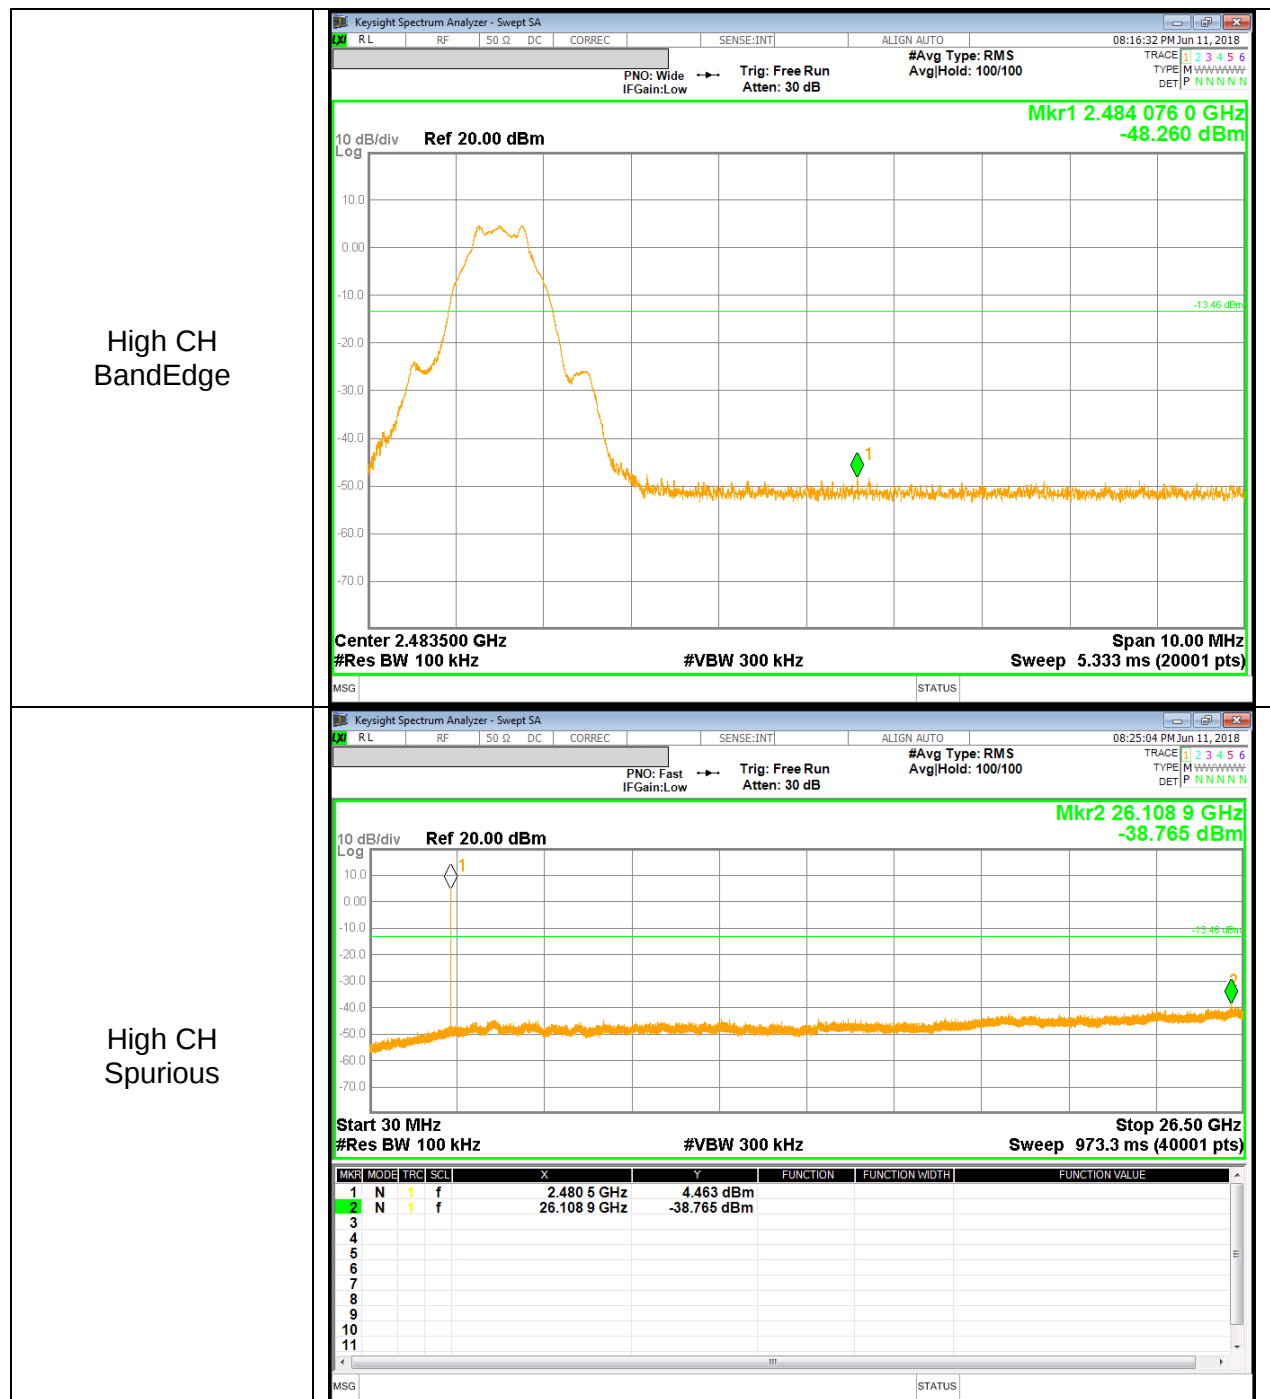

## 11. RADIATED TEST RESULTS

### 11.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

| Limits for radiated disturbance of an intentional radiator |                 |                          |
|------------------------------------------------------------|-----------------|--------------------------|
| Frequency range (MHz)                                      | Limits (μV/m)   | Measurement Distance (m) |
| 0.009 – 0.490                                              | 2400 / F (kHz)  | 300                      |
| 0.490 – 1.705                                              | 24000 / F (kHz) | 30                       |
| 1.705 – 30.0                                               | 30              | 30                       |
| 30 – 88                                                    | 100**           | 3                        |
| 88 - 216                                                   | 150**           | 3                        |
| 216 – 960                                                  | 200**           | 3                        |
| Above 960                                                  | 500             | 3                        |

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

## **TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor for average measurements. (Restricted bandedge, Final detection of spurious harmonic emissions) Duty cycle factor =  $10 \log(1/x)$ . For this sample: DCF =  $10 \log(1/0.623) = 2.06 \text{ dB}$  (Spectrum Analyzer round it up to 2.06dB)


Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.

The spectrum from 1 GHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.  
(From 30MHz to 1GHz, test was performed with the EUT set to transmit at the channel with highest output power)

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## 11.2. TRANSMITTER ABOVE 1 GHz RESTRICTED BANDEDGE (LOW CHANNEL)

### HORIZONTAL PEAK AND AVERAGE PLOT

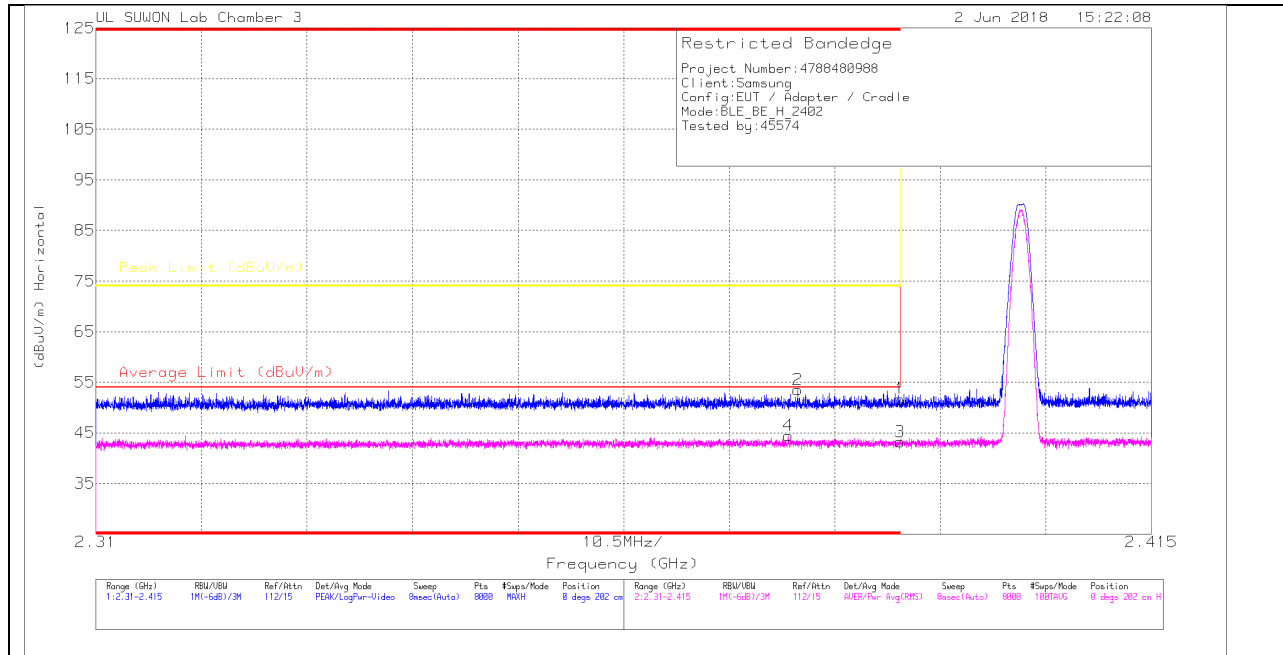

### HORIZONTAL DATA

#### Trace Markers


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | 3117(00205959) | 10dB_ATT(dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|--------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.39          | 43.22                | Pk  | 31.8           | -23.3        | 0            | 51.72                      | -                      | -           | 74                  | -22.28         | 0              | 202         | H        |
| 2      | * 2.38          | 44.92                | Pk  | 31.8           | -23.2        | 0            | 53.52                      | -                      | -           | 74                  | -20.48         | 0              | 202         | H        |
| 3      | * 2.39          | 32.51                | RMS | 31.8           | -23.3        | 2.19         | 43.2                       | 54                     | -10.8       | -                   | -              | 0              | 202         | H        |
| 4      | * 2.379         | 33.61                | RMS | 31.8           | -23.2        | 2.19         | 44.4                       | 54                     | -9.6        | -                   | -              | 0              | 202         | H        |

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

## VERTICAL PEAK AND AVERAGE PLOT

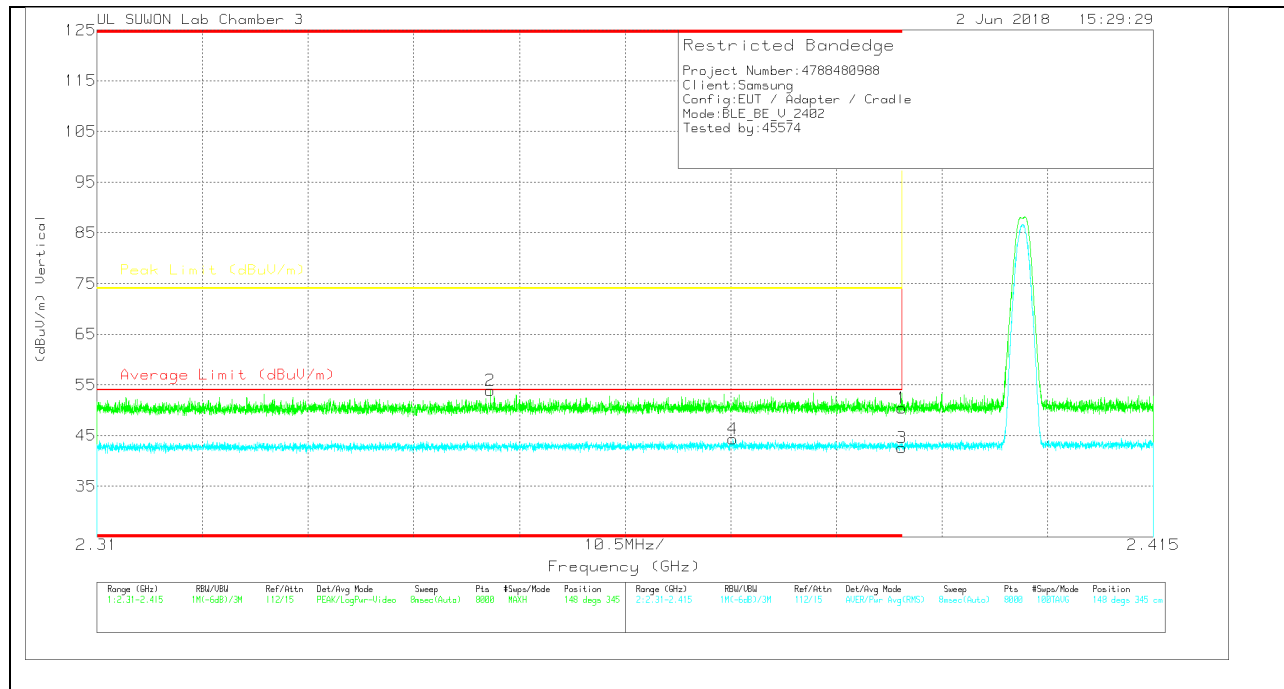

## VERTICAL DATA

### Trace Markers

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | 3117/00205959 | 10dB_ATT(dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|---------------|--------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.39          | 41.94                | Pk  | 31.8          | -23.3        | 0            | 50.44                      | -                      | -           | 74                  | -23.56         | 148            | 345         | V        |
| 2      | * 2.349         | 45.51                | Pk  | 31.7          | -23.3        | 0            | 53.91                      | -                      | -           | 74                  | -20.09         | 148            | 345         | V        |
| 3      | * 2.39          | 31.91                | RMS | 31.8          | -23.3        | 2.19         | 42.6                       | 54                     | -11.4       | -                   | -              | 148            | 345         | V        |
| 4      | * 2.373         | 33.59                | RMS | 31.7          | -23.2        | 2.19         | 44.28                      | 54                     | -9.72       | -                   | -              | 148            | 345         | V        |


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

## AUTHORIZED BANDEDGE (HIGH CHANNEL)

### HORIZONTAL PEAK AND AVERAGE PLOT

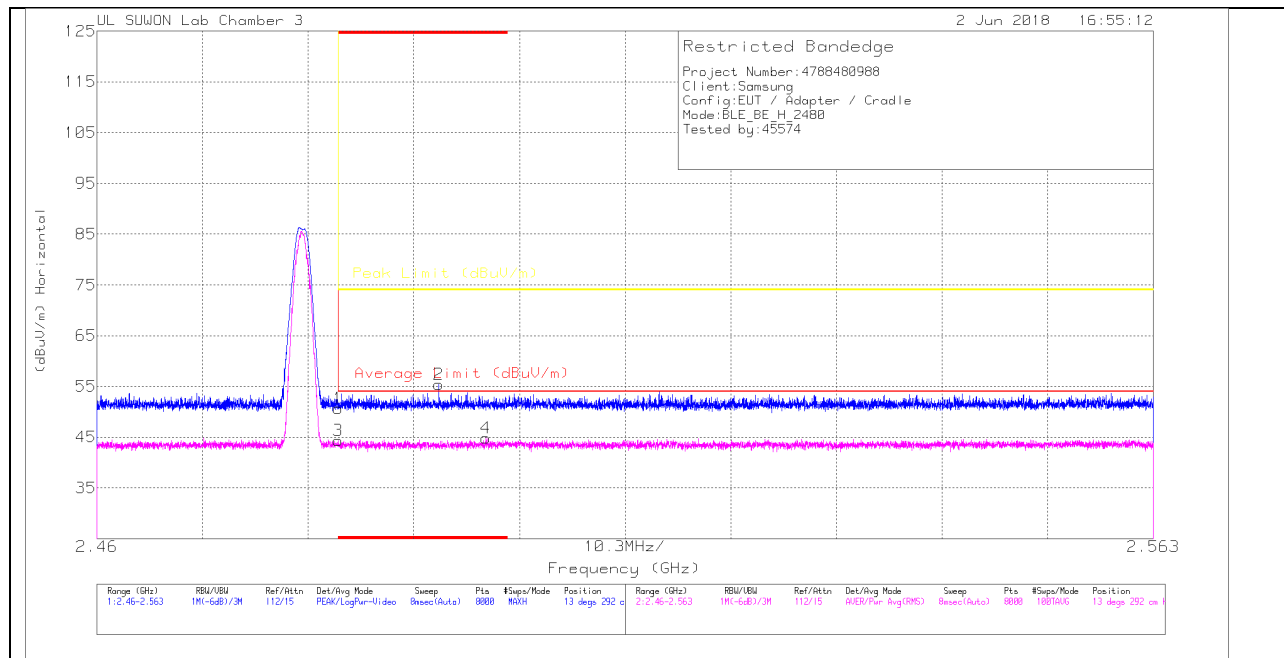

### HORIZONTAL DATA

#### Trace Markers


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | 3117[00205959] | 10dB_ATT[dB] | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Asimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|--------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.484         | 41.54                | Pk  | 32.1           | -23          | 0            | 50.64                      | -                      | -           | 74                  | -23.36         | 13             | 292         | H        |
| 2      | * 2.493         | 46.38                | Pk  | 32.1           | -23.1        | 0            | 55.38                      | -                      | -           | 74                  | -18.62         | 13             | 292         | H        |
| 3      | * 2.484         | 33.07                | RMS | 32.1           | -23          | 2.19         | 44.36                      | 54                     | -9.64       | -                   | -              | 13             | 292         | H        |
| 4      | * 2.498         | 33.57                | RMS | 32.1           | -23          | 2.19         | 44.86                      | 54                     | -9.14       | -                   | -              | 13             | 292         | H        |

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

## VERTICAL PEAK AND AVERAGE PLOT

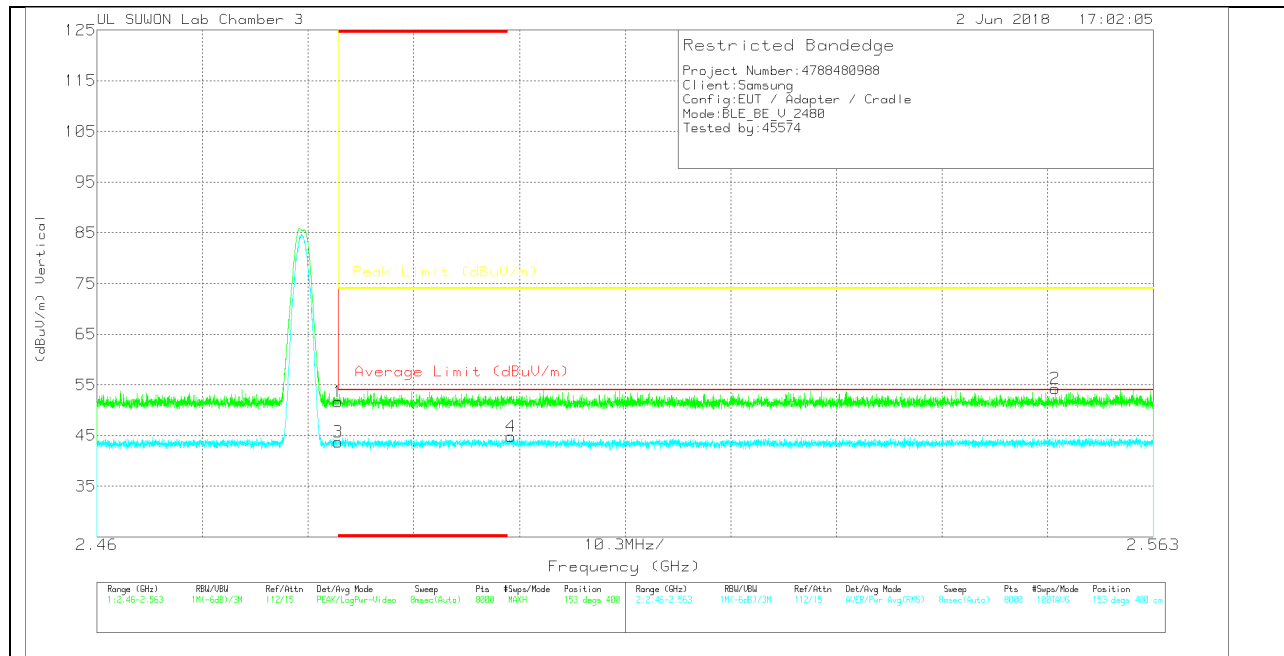

## VERTICAL DATA

### Trace Markers

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | 3117[00205999] | 100B_ATT[dB] | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Altitude (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|--------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|-----------------|-------------|----------|
| 1      | * 2.484         | 42.52                | Pk  | 32.1           | -23          | 0            | 51.62                      | -                      | -           | 74                  | -22.38         | 153             | 400         | V        |
| 2      | 2.553           | 45.17                | Pk  | 32.1           | -23          | 0            | 54.27                      | -                      | -           | 74                  | -19.73         | 153             | 400         | V        |
| 3      | * 2.484         | 32.47                | RMS | 32.1           | -23          | 2.19         | 43.76                      | 54                     | -10.24      | -                   | -              | 153             | 400         | V        |
| 4      | 2.5             | 33.49                | RMS | 32.1           | -22.9        | 2.19         | 44.88                      | 54                     | -9.12       | -                   | -              | 153             | 400         | V        |


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

## HARMONICS AND SPURIOUS EMISSIONS

### LOW CHANNEL HORIZONTAL

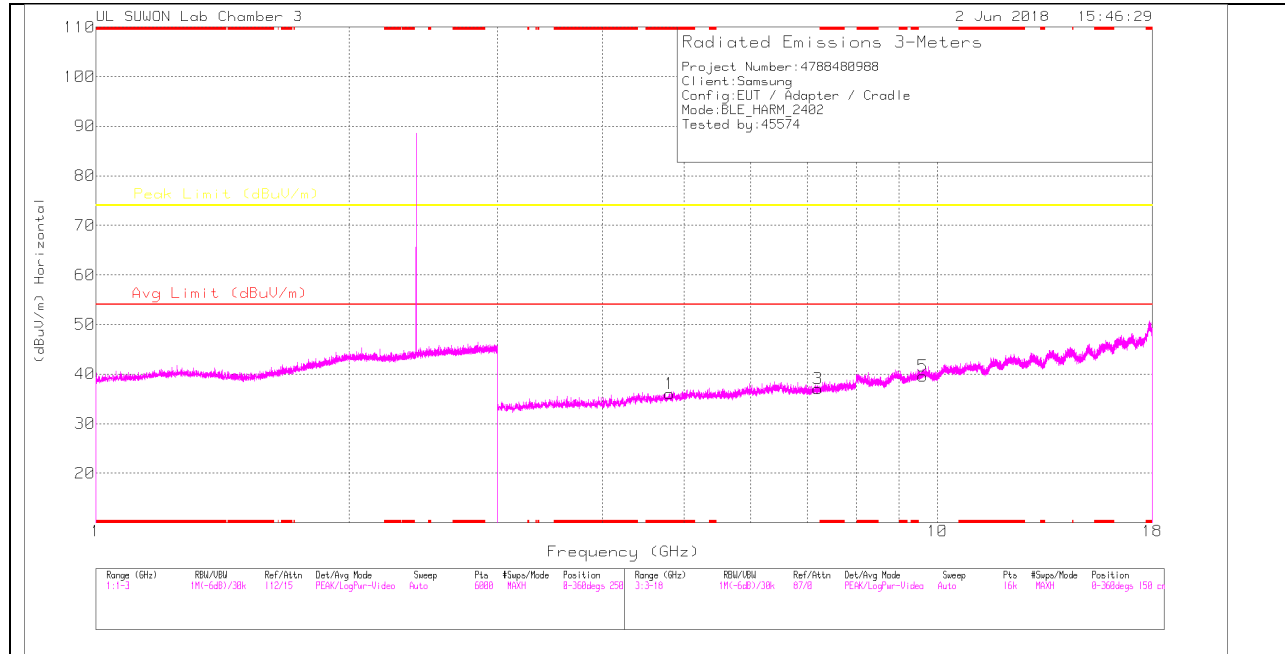

### LOW CHANNEL VERTICAL

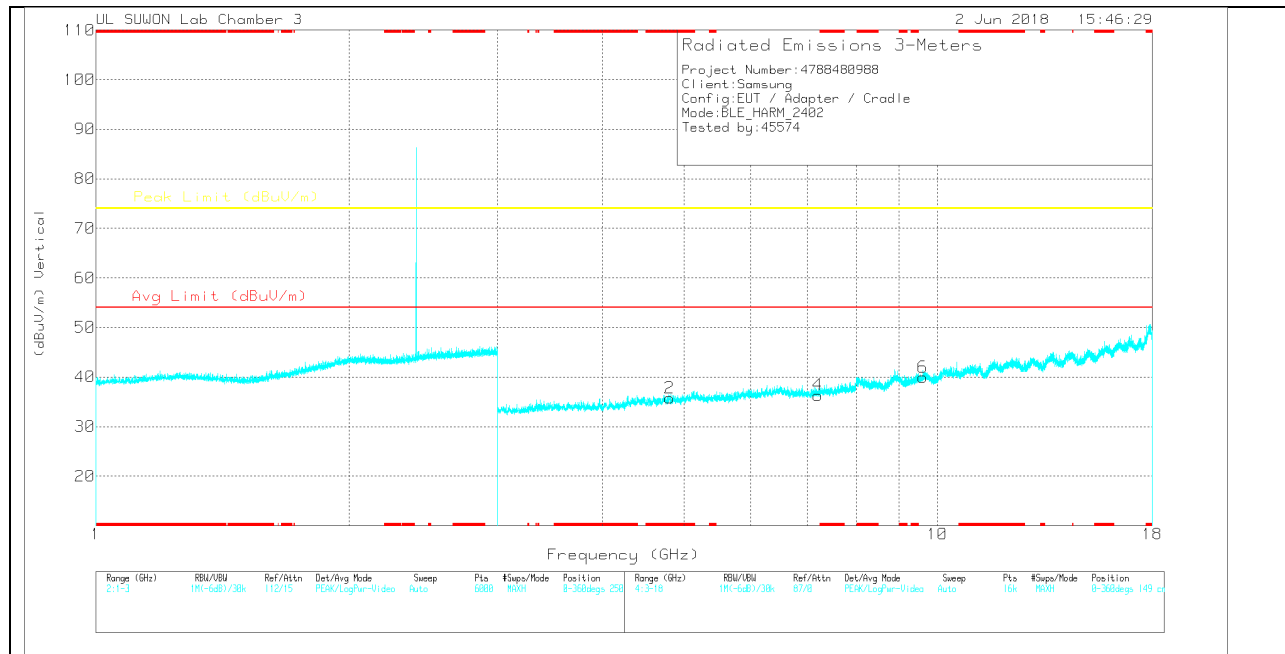

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## LOW CHANNEL DATA

### Trace Markers


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | 3117(00205959) | 3GHz_HP(dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-------------|--------------|----------------------------|--------------------|-------------|---------------------|-------------|----------------|-------------|----------|
| 1      | * 4.805         | 30.28                | PK  | 33.9           | -28.2       | 0            | 35.98                      | -                  | -           | 74                  | -38.02      | 0-360          | 150         | H        |
| 3      | 7.207           | 25.49                | PK  | 35.6           | -24         | 0            | 37.09                      | -                  | -           | 74                  | -36.91      | 0-360          | 150         | H        |
| 5      | 9.609           | 22.78                | PK  | 36.7           | -19.9       | 0            | 39.58                      | -                  | -           | 74                  | -34.42      | 0-360          | 250         | H        |
| 2      | * 4.804         | 30.09                | PK  | 33.9           | -28.2       | 0            | 35.79                      | -                  | -           | 74                  | -38.21      | 0-360          | 251         | V        |
| 4      | 7.207           | 24.75                | PK  | 35.6           | -24         | 0            | 36.35                      | -                  | -           | 74                  | -37.65      | 0-360          | 251         | V        |
| 6      | 9.609           | 23.17                | PK  | 36.7           | -19.9       | 0            | 39.97                      | -                  | -           | 74                  | -34.03      | 0-360          | 251         | V        |

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

## MID CHANNEL HORIZONTAL

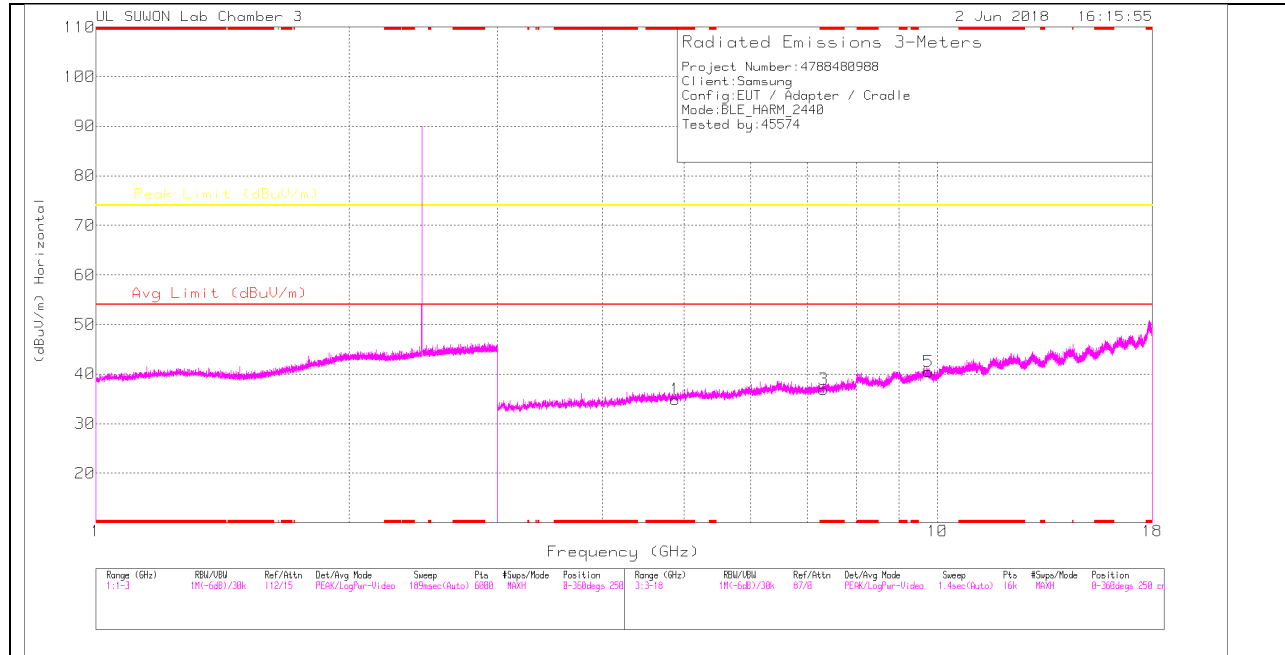

## MID CHANNEL VERTICAL

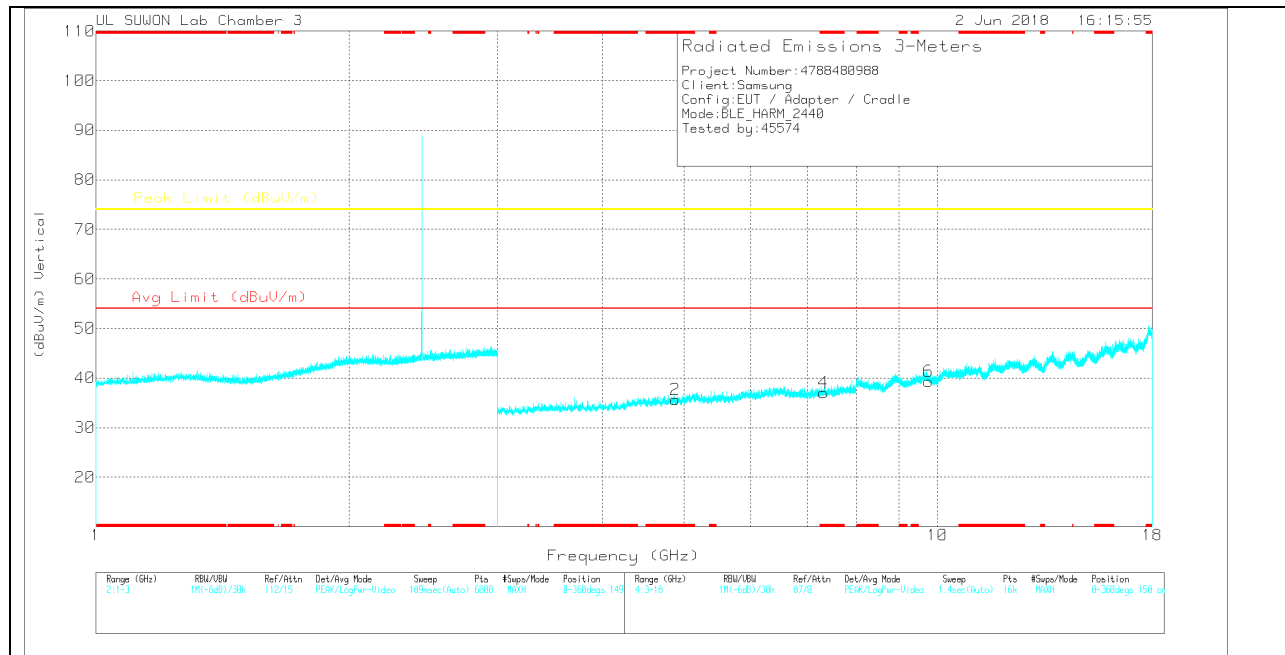

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## MID CHANNEL DATA

### Trace Markers


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | 3117(00205959) | 3GHz_HP(dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-------------|--------------|----------------------------|--------------------|-------------|---------------------|-------------|----------------|-------------|----------|
| 1      | * 4.881         | 29.82                | PK  | 34             | -28.9       | 0            | 34.92                      | -                  | -           | 74                  | -39.08      | 0-360          | 250         | H        |
| 3      | * 7.32          | 24.77                | PK  | 35.6           | -23.4       | 0            | 36.97                      | -                  | -           | 74                  | -37.03      | 0-360          | 250         | H        |
| 5      | 9.761           | 23.13                | PK  | 36.9           | -19.5       | 0            | 40.53                      | -                  | -           | 74                  | -33.47      | 0-360          | 250         | H        |
| 2      | * 4.881         | 30.57                | PK  | 34             | -28.9       | 0            | 35.67                      | -                  | -           | 74                  | -38.33      | 0-360          | 150         | V        |
| 4      | * 7.32          | 24.89                | PK  | 35.6           | -23.4       | 0            | 37.09                      | -                  | -           | 74                  | -36.91      | 0-360          | 150         | V        |
| 6      | 9.761           | 21.89                | PK  | 36.9           | -19.5       | 0            | 39.29                      | -                  | -           | 74                  | -34.71      | 0-360          | 251         | V        |

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

## HIGH CHANNEL HORIZONTAL

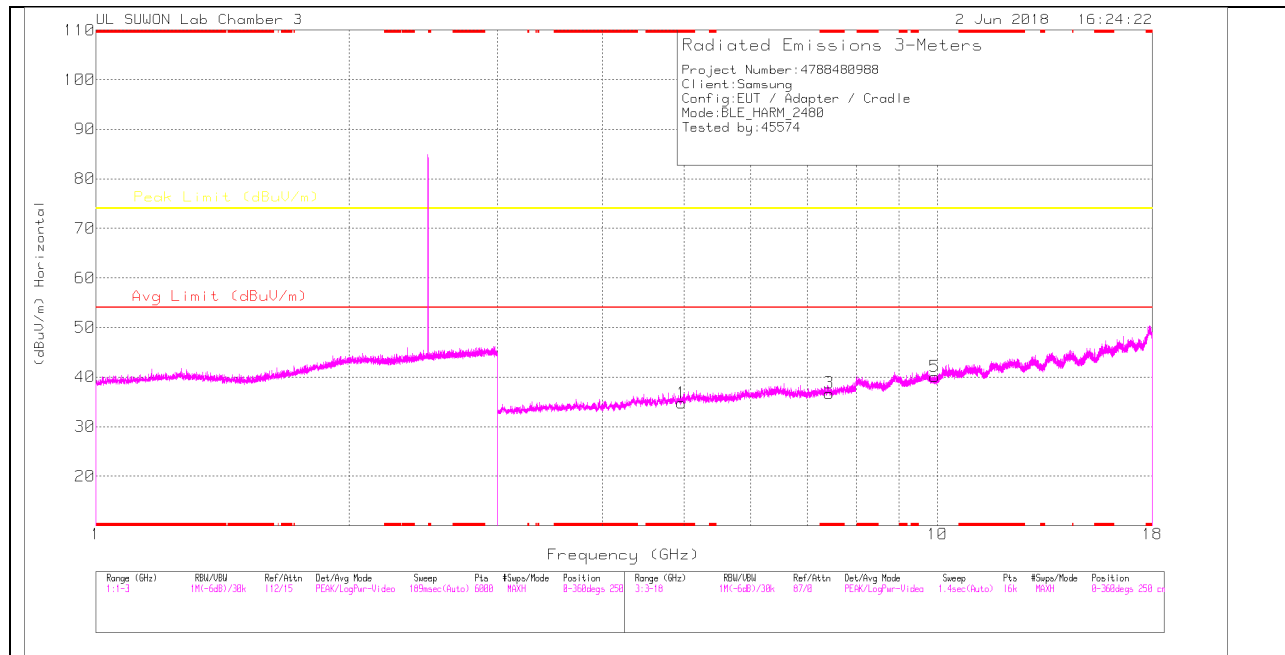

## HIGH CHANNEL VERTICAL

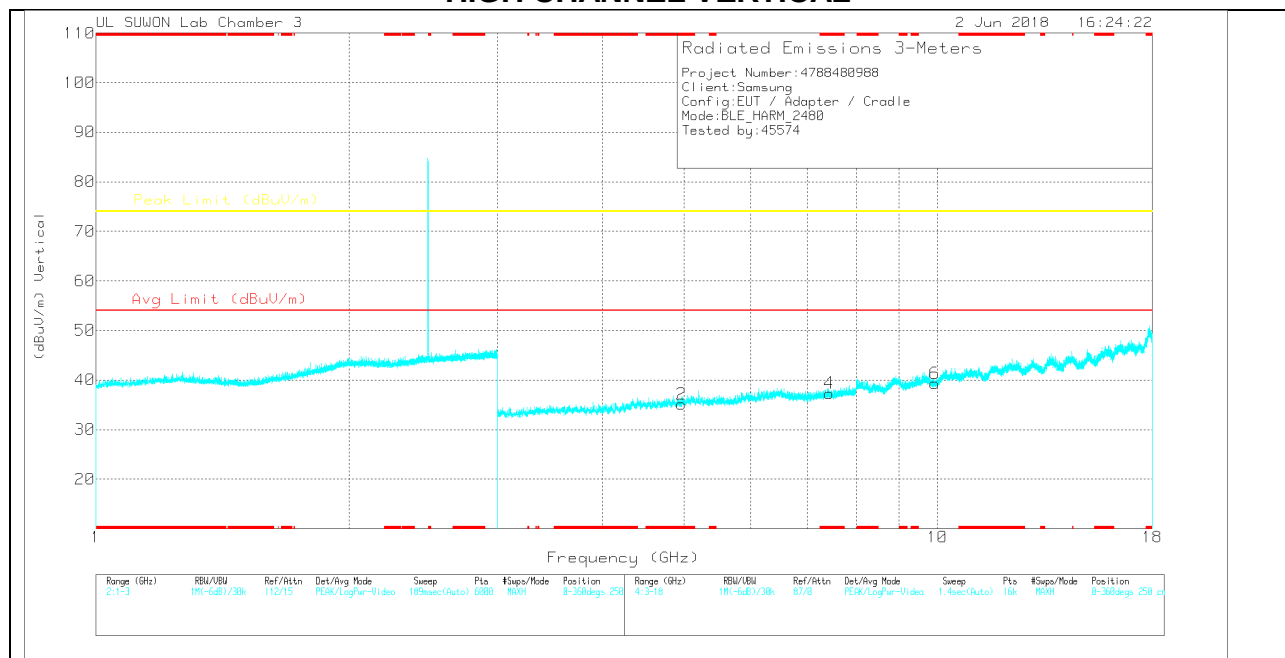

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## HIGH CHANNEL DATA

### Trace Markers

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | 3117(00205959) | 3GHz_HP(dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-------------|--------------|----------------------------|--------------------|-------------|---------------------|-------------|----------------|-------------|----------|
| 1      | * 4.96          | 29.15                | PK  | 34.1           | -28.5       | 0            | 34.75                      | -                  | -           | 74                  | -39.25      | 0-360          | 250         | H        |
| 3      | * 7.44          | 24.33                | PK  | 35.6           | -23.2       | 0            | 36.73                      | -                  | -           | 74                  | -37.27      | 0-360          | 250         | H        |
| 5      | 9.921           | 22.83                | PK  | 37             | -19.7       | 0            | 40.13                      | -                  | -           | 74                  | -33.87      | 0-360          | 250         | H        |
| 2      | * 4.96          | 29.51                | PK  | 34.1           | -28.5       | 0            | 35.11                      | -                  | -           | 74                  | -38.89      | 0-360          | 250         | V        |
| 4      | * 7.44          | 24.96                | PK  | 35.6           | -23.2       | 0            | 37.36                      | -                  | -           | 74                  | -36.64      | 0-360          | 149         | V        |
| 6      | 9.921           | 22.06                | PK  | 37             | -19.7       | 0            | 39.36                      | -                  | -           | 74                  | -34.64      | 0-360          | 250         | V        |


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).


### 11.3. WORST-CASE BELOW 1 GHz

#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

##### HORIZONTAL PLOT

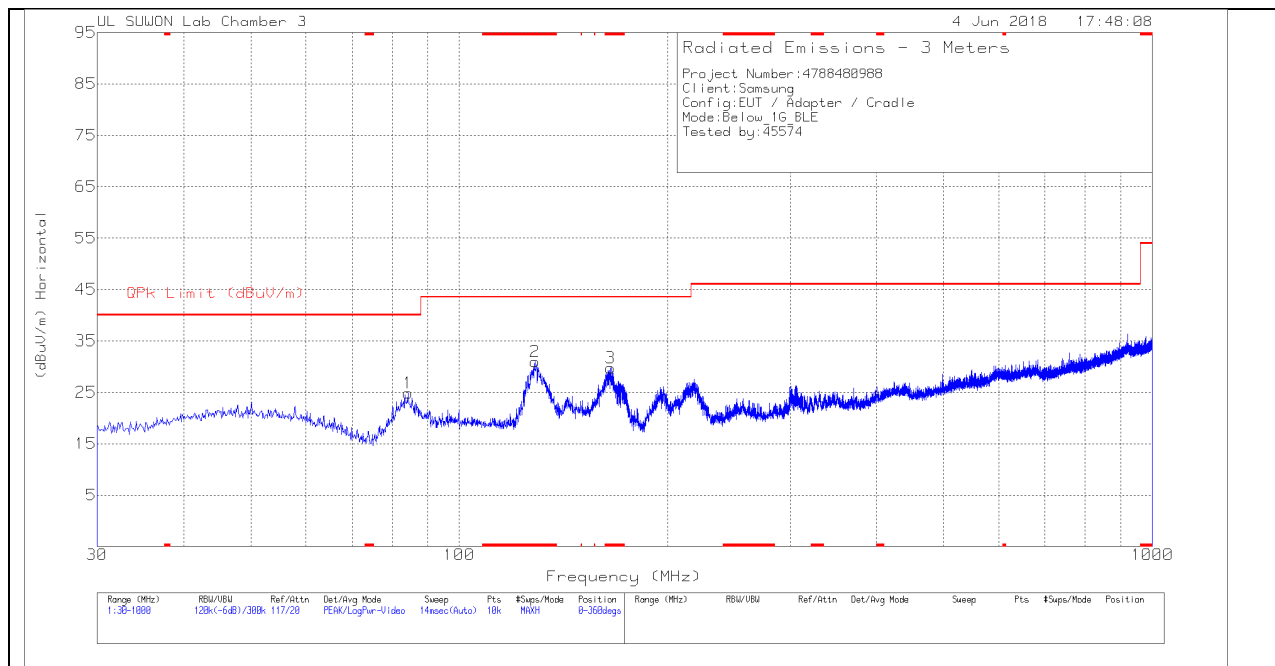

##### VERTICAL PLOT

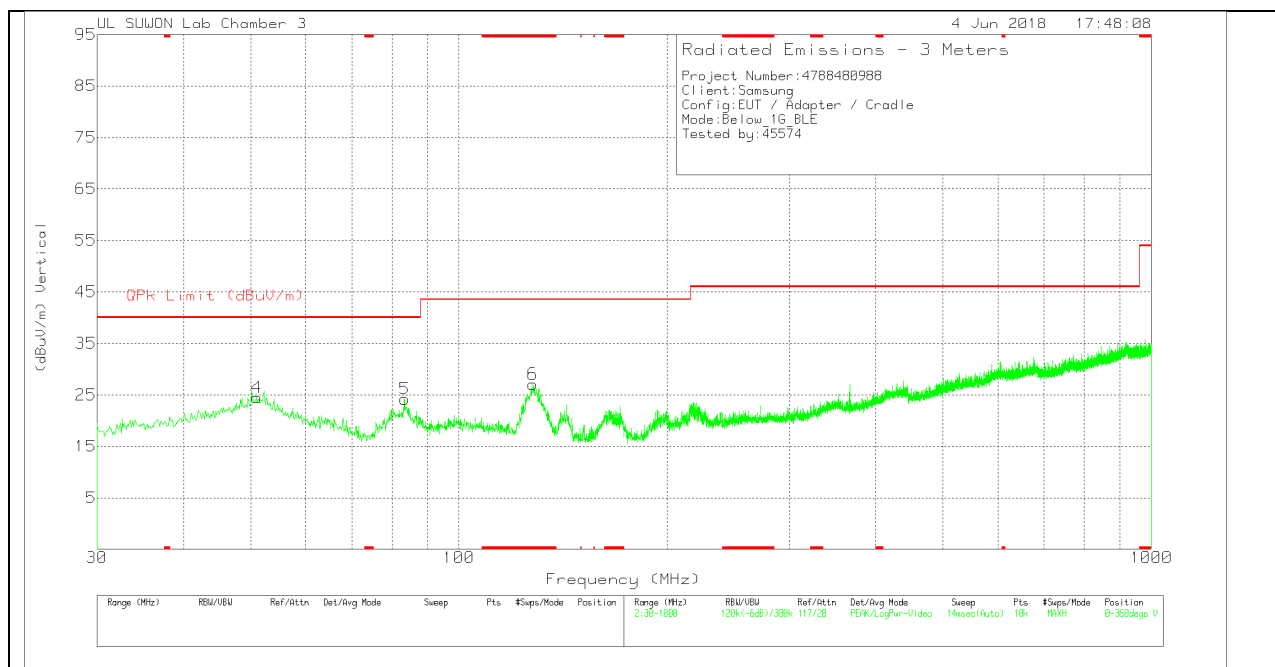

## BELOW 1 GHz TABLE

### Trace Markers

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | VULB9163-845 | 30-1000MHz[dB] | Corrected Reading (dBuV/m) | QPk Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|--------------|----------------|----------------------------|--------------------|-------------|----------------|-------------|----------|
| 1      | 84.3256         | 42.33                | Pk  | 14.2         | -31.7          | 24.83                      | 40                 | -15.17      | 0-360          | 300         | H        |
| 2      | * 128.6592      | 47.45                | Pk  | 14.9         | -31.4          | 30.95                      | 43.52              | -12.57      | 0-360          | 200         | H        |
| 3      | * 165.2319      | 46.03                | Pk  | 14.9         | -31.2          | 29.73                      | 43.52              | -13.79      | 0-360          | 200         | H        |
| 4      | 51.0512         | 36.25                | Pk  | 20           | -31.8          | 24.45                      | 40                 | -15.55      | 0-360          | 100         | V        |
| 5      | 83.4525         | 42                   | Pk  | 13.9         | -31.7          | 24.2                       | 40                 | -15.8       | 0-360          | 200         | V        |
| 6      | * 127.8831      | 43.48                | Pk  | 15           | -31.4          | 27.08                      | 43.52              | -16.44      | 0-360          | 100         | V        |

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

## 12. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

| Frequency of Emission (MHz) | Conducted Limit (dBuV) |                       |
|-----------------------------|------------------------|-----------------------|
|                             | Quasi-peak             | Average               |
| 0.15-0.5                    | 66 to 56 <sup>*</sup>  | 56 to 46 <sup>*</sup> |
| 0.5-5                       | 56                     | 46                    |
| 5-30                        | 60                     | 50                    |

<sup>\*</sup> Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

## RESULTS

### WORST EMISSIONS

#### LINE 1 PLOT

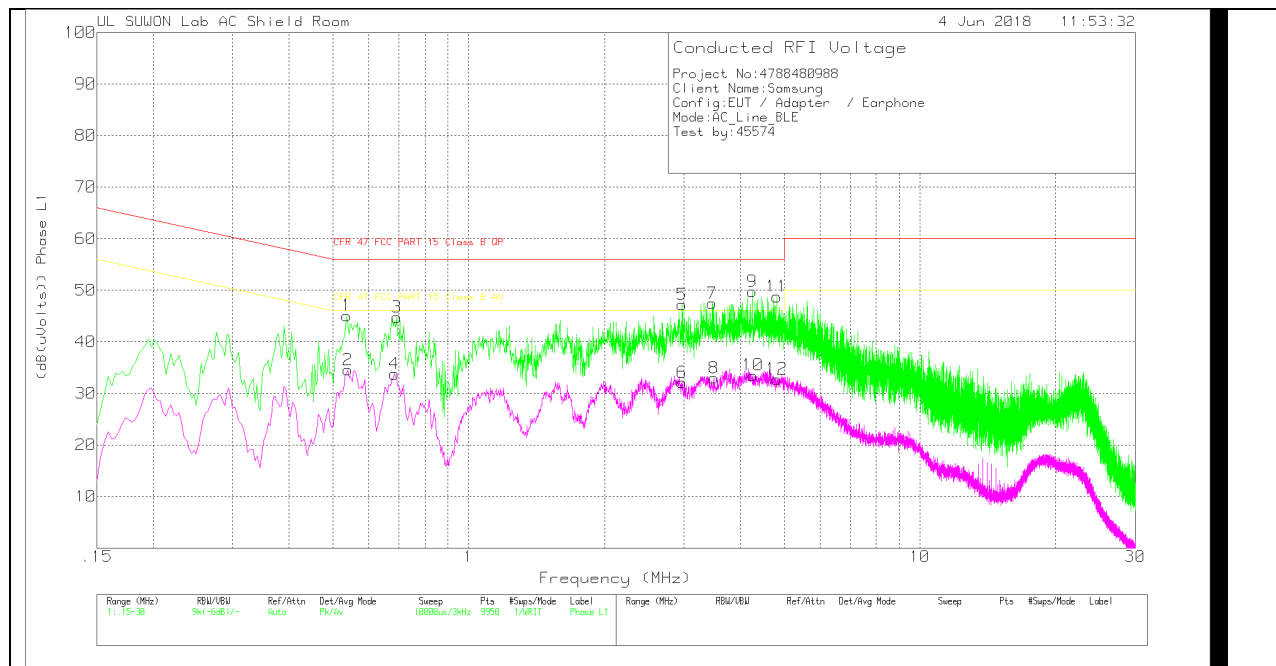

## LINE 1 RESULTS

### Trace Markers

Range 1: Phase L1 .15 - 30MHz

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | 101837_L1_with extension | CABLELOSS(dB) | Corrected Reading (dB(uVolts)) | CFR 47 FCC PART 15 Class B QP | Margin (dB) | CFR 47 FCC PART 15 Class B AV | Margin (dB) |
|--------|-----------------|----------------------|-----|--------------------------|---------------|--------------------------------|-------------------------------|-------------|-------------------------------|-------------|
| 1      | .537            | 35.2                 | Pk  | 9.7                      | .2            | 45.1                           | 56                            | -10.9       | -                             | -           |
| 2      | .54             | 24.53                | Av  | 9.8                      | .2            | 34.53                          | -                             | -           | 46                            | -11.47      |
| 3      | .693            | 34.85                | Pk  | 9.7                      | .2            | 44.75                          | 56                            | -11.25      | -                             | -           |
| 4      | .684            | 23.89                | Av  | 9.7                      | .2            | 33.79                          | -                             | -           | 46                            | -12.21      |
| 5      | 2.97            | 37.14                | Pk  | 9.8                      | .3            | 47.24                          | 56                            | -8.76       | -                             | -           |
| 6      | 2.97            | 22.01                | Av  | 9.8                      | .3            | 32.11                          | -                             | -           | 46                            | -13.89      |
| 7      | 3.465           | 37.34                | Pk  | 9.8                      | .3            | 47.44                          | 56                            | -8.56       | -                             | -           |
| 8      | 3.495           | 22.86                | Av  | 9.8                      | .3            | 32.96                          | -                             | -           | 46                            | -13.04      |
| 9      | 4.254           | 39.78                | Pk  | 9.7                      | .3            | 49.78                          | 56                            | -6.22       | -                             | -           |
| 10     | 4.263           | 23.52                | Av  | 9.7                      | .3            | 33.52                          | -                             | -           | 46                            | -12.48      |
| 11     | 4.815           | 38.76                | Pk  | 9.7                      | .3            | 48.76                          | 56                            | -7.24       | -                             | -           |
| 12     | 4.815           | 22.78                | Av  | 9.7                      | .3            | 32.78                          | -                             | -           | 46                            | -13.22      |

Pk - Peak detector

Av - Average detection


### Quasi-Peak Emissions

Range 1: Phase L1 .15 - 30MHz

| Frequency (MHz) | Meter Reading (dBuV) | Det | 101837_L1_with extension | CABLELOSS(dB) | Corrected Reading (dB(uVolts)) | CFR 47 FCC PART 15 Class B QP | Margin (dB) | CFR 47 FCC PART 15 Class B AV | Margin (dB) |
|-----------------|----------------------|-----|--------------------------|---------------|--------------------------------|-------------------------------|-------------|-------------------------------|-------------|
| 3.49575         | 28.97                | Qp  | 9.8                      | .3            | 39.07                          | 56                            | -16.93      | -                             | -           |
| 4.26315         | 30.38                | Qp  | 9.7                      | .3            | 40.38                          | 56                            | -15.62      | -                             | -           |
| 4.81425         | 29.98                | Qp  | 9.7                      | .3            | 39.98                          | 56                            | -16.02      | -                             | -           |

Qp - Quasi-Peak detector

LINE 2 PLOT

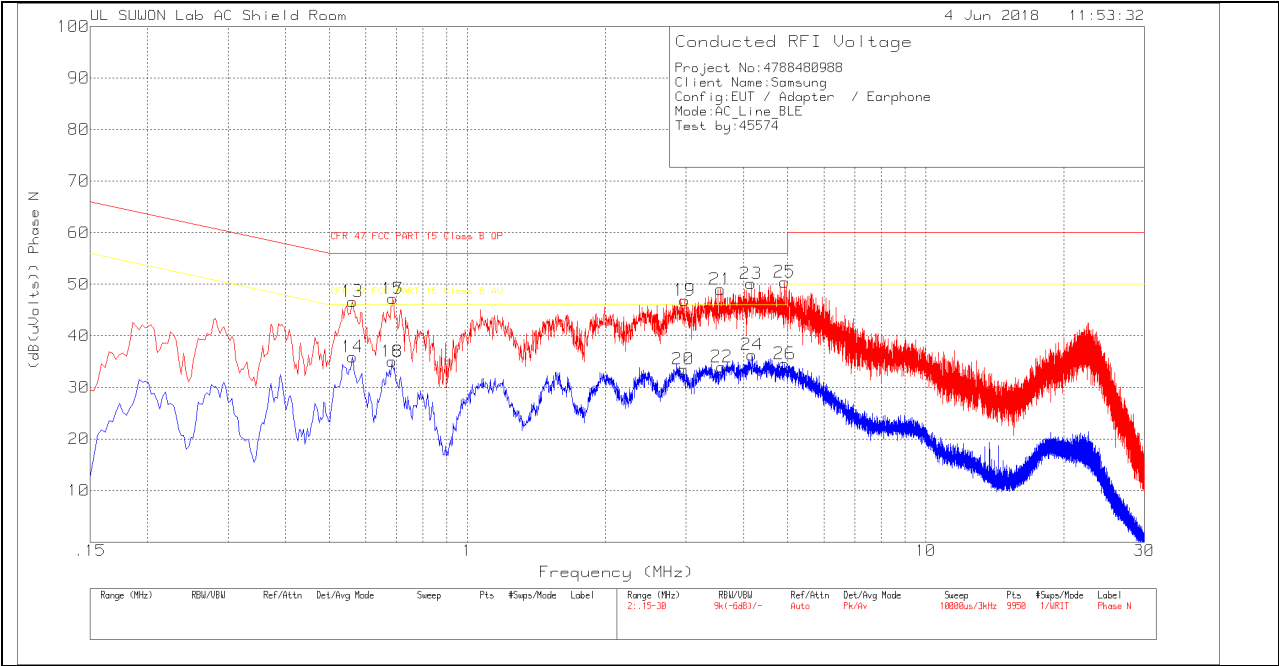

## LINE 2 RESULTS

### Trace Markers

Range 2: Phase N .15 - 30MHz

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | 101837_N_with extension | CABLELOSS(dB) | Corrected Reading (dB(uVolts)) | CFR 47 FCC PART 15 Class B QP | Margin (dB) | CFR 47 FCC PART 15 Class B AV | Margin (dB) |
|--------|-----------------|----------------------|-----|-------------------------|---------------|--------------------------------|-------------------------------|-------------|-------------------------------|-------------|
| 13     | .561            | 36.65                | Pk  | 9.8                     | .2            | 46.65                          | 56                            | -9.35       | -                             | -           |
| 14     | .561            | 25.92                | Av  | 9.8                     | .2            | 35.92                          | -                             | -           | 46                            | -10.08      |
| 15     | .687            | 37.23                | Pk  | 9.8                     | .2            | 47.23                          | 56                            | -8.77       | -                             | -           |
| 16     | .684            | 25.03                | Av  | 9.8                     | .2            | 35.03                          | -                             | -           | 46                            | -10.97      |
| 17     | .687            | 37.23                | Pk  | 9.8                     | .2            | 47.23                          | 56                            | -8.77       | -                             | -           |
| 18     | .684            | 25.03                | Av  | 9.8                     | .2            | 35.03                          | -                             | -           | 46                            | -10.97      |
| 19     | 2.976           | 36.69                | Pk  | 9.9                     | .3            | 46.89                          | 56                            | -9.11       | -                             | -           |
| 20     | 2.955           | 23.33                | Av  | 9.9                     | .3            | 33.53                          | -                             | -           | 46                            | -12.47      |
| 21     | 3.561           | 38.91                | Pk  | 9.8                     | .3            | 49.01                          | 56                            | -6.99       | -                             | -           |
| 22     | 3.585           | 23.89                | Av  | 9.8                     | .3            | 33.99                          | -                             | -           | 46                            | -12.01      |
| 23     | 4.155           | 40.02                | Pk  | 9.8                     | .3            | 50.12                          | 56                            | -5.88       | -                             | -           |
| 24     | 4.179           | 26.23                | Av  | 9.8                     | .3            | 36.33                          | -                             | -           | 46                            | -9.67       |
| 25     | 4.92            | 40.35                | Pk  | 9.8                     | .3            | 50.45                          | 56                            | -5.55       | -                             | -           |
| 26     | 4.923           | 24.49                | Av  | 9.8                     | .3            | 34.59                          | -                             | -           | 46                            | -11.41      |

Pk - Peak detector

Av - Average detection

### Quasi-Peak Emissions

Range 2: Phase N .15 - 30MHz

| Frequency (MHz) | Meter Reading (dBuV) | Det | 101837_N_with extension | CABLELOSS(dB) | Corrected Reading (dB(uVolts)) | CFR 47 FCC PART 15 Class B QP | Margin (dB) | CFR 47 FCC PART 15 Class B AV | Margin (dB) |
|-----------------|----------------------|-----|-------------------------|---------------|--------------------------------|-------------------------------|-------------|-------------------------------|-------------|
| .68775          | 33.11                | Qp  | 9.8                     | .2            | 43.11                          | 56                            | -12.89      | -                             | -           |
| .68775          | 33.04                | Qp  | 9.8                     | .2            | 43.04                          | 56                            | -12.96      | -                             | -           |
| 2.95515         | 31.07                | Qp  | 9.9                     | .3            | 41.27                          | 56                            | -14.73      | -                             | -           |
| 3.58575         | 32.11                | Qp  | 9.8                     | .3            | 42.21                          | 56                            | -13.79      | -                             | -           |
| 4.17825         | 32.6                 | Qp  | 9.8                     | .3            | 42.7                           | 56                            | -13.3       | -                             | -           |
| 4.92375         | 32.19                | Qp  | 9.8                     | .3            | 42.29                          | 56                            | -13.71      | -                             | -           |

Qp - Quasi-Peak detector