verify No.390992991622

위변조방지/진위확인
www.docuqr.com

TEST REPORT

KCTL Inc.
65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

KCTL

1. Client

- Name : Samsung Electronics Co., Ltd.
- Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
- Date of Receipt : 2019-10-18

2. Use of Report : Class II Permissive change

3. Name of Product and Model : Smart Wearable / SM-R835F

4. Manufacturer and Country of Origin : Samsung Electronics Co., Ltd. / Korea

5. FCC ID : A3LSMR835

6. Date of Test : 2019-10-30 to 2019-11-05

7. Test Standards : FCC Part 15 Subpart C, 15.247

8. Test Results : Refer to the test result in the test report

Affirmation	Tested by Name : Euijung Kim (Signature)	Technical Manager Name : Seungyong Kim (Signature)

2019-11-15

KCTL Inc.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.

Report revision history

Date	Revision	Page No
2019-11-15	Initial report	-

This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KOLAS accreditation.

CONTENTS

1. General information 4
2. Device information 4
2.1. Accessory information 5
2.2. Frequency/channel operations 5
2.3. Duty Cycle Correction Factor 6
3. Antenna requirement 7
4. Summary of tests 8
5. Measurement uncertainty 9
6. Measurement results explanation example 10
7. Test results 11
7.1. Maximum peak output power 11
7.2. Spurious Emission, Band Edge and Restricted bands 14
7.3. AC Conducted emission 20
8. Measurement equipment 22

This test report shall not be reproduced, except in full, without the written approval

1. General information

Client	:	Samsung Electronics Co., Ltd.
Address	:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
Manufacturer	:	Samsung Electronics Co., Ltd.
Address	:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
Factory	:	Samsung Electronics Co., Ltd.
Address	:	94-1, Imsu-dong, Gumi-si, Gyengsangbuk-do, 730-722, Rep. of Korea
Factory	:	Samsung Electronics VIETNAM Co., Ltd.
Address	:	Yenphong 1 - I.P Yentrung Commune, Yenphong Dist., Bac Ninh Province, Vietnam
Laboratory	:	KCTL Inc.
Address	:	65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
Accreditations	:	FCC Site Designation No: KR0040, FCC Site Registration No: 687132
		VCCI Registration No. : R-20080, G-20078, C-20059, T-20056
		Industry Canada Registration No. : 8035A
		KOLAS No.: KT231

2. Device information

Equipment under test	:	Smart Wearable
Model	:	SM-R835F
Frequency range	:	Bluetooth(BDR/EDR/BLE)_2 402 ㎒ ~ 2 480 ㎒
		WIFI(802.11b/g/n20)_2 412 ㎒ ~ 2 472 ㎒
		LTE Band 5_824.7 ㎒ ~ 848.3 ㎒
		WCDMA 850_826.4 ㎒ ~ 846.6 ㎒
Modulation technique	:	Bluetooth(BDR/EDR)_ GFSK, π/4DQPSK, 8DPSK
		Bluetooth(BLE)_GFSK
		WIFI(802.11b/g/n20)_DSSS, OFDM
		LTE_QPSK, 16QAM
		WCDMA_QPSK
Number of channels	:	Bluetooth(BDR/EDR)_79 ch
		Bluetooth(BLE)_40 ch
		WIFI(802.11b/g/n20)_13 ch
Power source	:	DC 3.85 V
Antenna specification	:	LTE/WCDMA_PIFA (Housing metal) Antenna
		WIFI/Bluetooth(BDR/EDR/BLE)_LDS Antenna
Antenna gain	:	WIFI/Bluetooth(BDR/EDR/BLE) : -6.4 ㏈i
Software version	:	R835F.001
Hardware version	:	REV1.0

Test device serial No. : Conducted(353343/11/000040/0)
Radiated(R3AM90016TK, R3AM90016QF, R3AM900174Y)

Operation temperature : -30 ℃ ~ 50 ℃

2.1. Accessory information

Equipment	Manufacturer	Model	Serial No.	Power source	FCC ID
Wireless charger	Samsung Electronics Co., Ltd.	EP-OR825	-	DC 5.0 V, 1.0 A	A3LEPOR825

2.2. Frequency/channel operations

This device contains the following capabilities:
Bluetooth(BDR/EDR/BLE), WIFI(802.11b/g/n20), LTE Band 5, WCDMA 850

Ch.	Frequency (MHz)
00	2 402
. .	. .
19	2 440
. .	. .
39	2 480

Table 2.2.1. Bluetooth Low Energy

2.3. Duty Cycle Correction Factor

- BLE (1MBits/s, Packet length 37)

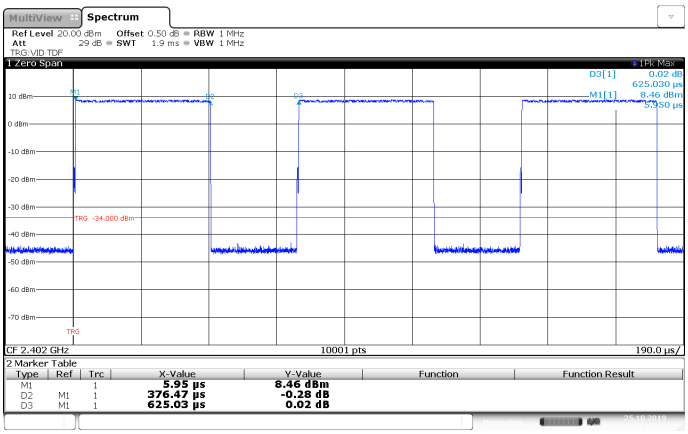

Note1) : Period : 0.625 03 ㎳, On time : 0.376 47 ㎳
Note2) : DCCF = 10 log(1 / x) = 10 log(1/0.602 3) = 2.202 ㏈, x = 0.376 47/0.625 03 = 0.602 3
Note3) : BLE (1Mbits/s, Packet length 37) is a non-continuous transmission (duty cycle < 98 %)

- BLE (1MBits/s, Packet length 255)

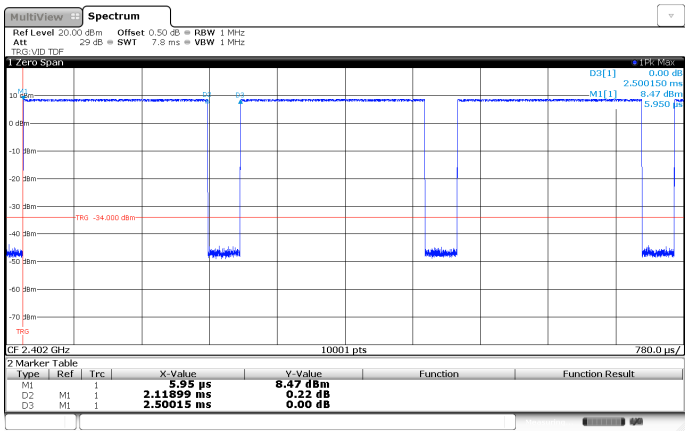

Note1) : Period : 2.500 15 ㎳, On time : 2.118 99 ㎳
Note2) : DCCF = 10 log(1 / x) = 10 log(1/0.847 5) = 0.718 ㏈, x = 2.118 99/2.500 15 = 0.847 5
Note3) : BLE (1Mbits/s, Packet length 255)is a non-continuous transmission (duty cycle < 98 %)

3. Antenna requirement

Requirement of FCC part section 15.203:
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- The transmitter has permanently attached LDS Antenna (internal antenna) on board.
- The E.U.T Complies with the requirement of §15.203, §15.247.

This test report shall not be reproduced, except in full, without the written approval

4. Summary of tests

FCC Part section(s)	Parameter	Test results
15.247(b)(3)	Maximum Peak Output Power	Pass
15.247(e)	Peak Power Spectral Density	N/T(Note1)
15.247(a)(2)	6 dB Channel Bandwidth	N/T(Note1)
-	Occupied Bandwidth	N/T(Note1)
15.247(d), 15.205(a), 15.209(a)	Spurious emission	Pass
	Band-edge, restricted band	Pass
15.207(a)	Conducted Emissions	Pass

Notes: (N/T: Not Tested, N/A: Not Applicable)

1. These test item was performed. (FCC ID: A3LSMR835)
   Test Report No. KR19-SRF0095-A issued on 8, August, 2019 by KCTL Inc.)
2. C2PC model is electrically identical to the Original model.
   The Product Equality Declaration includes detailed information about the changes between the devices.
3. The data from that application has been verified through appropriate spot checks to demonstrate compliance for this device as shown in the test result of section 7.
4. Output power was verified to be within the expected tune up tolerances prior to performing the spot checks for radiated spurious emissions and band edge to confirm that the proposed changes to the digital circuitry had not adversely affected the previously reported values in the original filing.
5. The test scenario for spot check is based on the worst-case of original report results.

This test report shall not be reproduced, except in full, without the written approval

5. Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of *k*=2 to indicated a 95 % level of confidence. The measurement data shown herein meets of exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded uncertainty (±)	
Conducted RF power	1.76 dB	
Conducted spurious emissions	4.03 dB	
Radiated spurious emissions	9 kHz ~ 30 MHz:	2.28 dB
	30 MHz ~ 300 MHz	4.98 dB
	300 MHz ~ 1 000 MHz	5.14 dB
	1 GHz ~ 6 GHz	6.70 dB
	Above 6 GHz	6.60 dB
Conducted emissions	9 kHz ~ 150 kHz	3.66 dB
	150 kHz ~ 30 MHz	3.26 dB

This test report shall not be reproduced, except in full, without the written approval

6. Measurement results explanation example

The offset level is set in the spectrum analyzer to compensate the RF cable loss factor between EUT conducted output port and spectrum analyzer.
With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Frequency (㎒)	Factor(㏈)	Frequency (㎒)	Factor(㏈)
30	10.57	9 000	12.95
100	10.55	10 000	13.12
200	10.62	11 000	13.39
300	10.72	12 000	13.51
400	10.78	13 000	13.89
500	10.82	14 000	15.13
600	10.82	15 000	14.62
700	10.92	16 000	14.37
800	11.09	17 000	13.18
900	11.08	18 000	13.18
1 000	11.09	19 000	14.07
2 000	11.42	20 000	13.65
3 000	11.73	21 000	14.28
4 000	11.91	22 000	14.74
5 000	12.33	23 000	14.44
6 000	12.39	24 000	14.61
7 000	12.66	25 000	15.08
8 000	12.67	26 000	15.29

Note.
Offset(㏈) = RF cable loss(㏈) + Attenuator(㏈)

7. Test results

7.1. Maximum peak output power

Test setup



Limit

According to §15.247(b)(3), For systems using digital modulation in the 902-928 ㎒, 2 400-2 483.5 ㎒, and 5 725-5 850 ㎒ bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to §15.247(b)(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 ㏈i. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 ㏈i are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in ㏈ that the directional gain of the antenna exceeds 6 ㏈i.

Test procedure

ANSI C63.10-2013 - Section 11.9 and 14.2

Test settings

General

Section 15.247 permits the maximum conducted (average) output power to be measured as an alternative to the maximum peak conducted output power for demonstrating compliance to the limit. When this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth (see ANSI C63.10 for measurement guidance).

When using a spectrum analyzer or EMI receiver to perform these measurements, it shall be capable of utilizing a number of measurement points in each sweep that is greater than or equal to twice the span/RBW to set a bin-to-bin spacing of ≤ RBW/2 so that narrowband signals are not lost between frequency bins.

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level. The intent is to test at 100 % duty cycle; however a small reduction in duty cycle (to no lower than 98 %) is permitted, if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

If continuous transmission (or at least 98 % duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level, with

the transmit duration as long as possible, and the duty cycle as high as possible during which sweep triggering/signal gating techniques may be used to perform the measurement over the transmission duration.

Maximum peak conducted output power
One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

RBW ≥ DTS bandwidth
The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

a) Set the RBW ≥ DTS bandwidth.
b) Set VBW ≥ [3 × RBW].
c) Set span ≥ [3 × RBW].
d) Sweep time = auto couple.
e) Detector = peak.
f) Trace mode = max hold.
g) Allow trace to fully stabilize.
h) Use peak marker function to determine the peak amplitude level.

PKPM1 Peak power meter method
The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

Measurement using a power meter (PM)

Method AVGPM is a measurement using an RF average power meter, as follows:

a) As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied:
   1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
   2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
   3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
b) If the transmitter does not transmit continuously, measure the duty cycle, D, of the transmitter output signal as described in 11.6.
c) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
d) Adjust the measurement in dBm by adding [10 log(1/D)], where D is the duty cycle.

Notes:
A peak responding power sensor is used, where the power sensor system video bandwidth is greater than the occupied bandwidth of the EUT.

Test results

Test mode	Frequency(㎒)	Measured output power(㏈m)		Limit(㏈m)
		Peak	Average	
BLE 1 Mbps / 37 packet	2 402	7.85	7.37	30.00
	2 440	8.46	7.77	
	2 480	8.16	7.53	
BLE 1 Mbps / 255 packet	2 402	7.45	7.67	30.00
	2 440	7.25	6.98	
	2 480	7.85	6.56	

This test report shall not be reproduced, except in full, without the written approval

7.2. Spurious Emission, Band Edge and Restricted bands

Test setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 9 ㎑ to 30 ㎒ Emissions

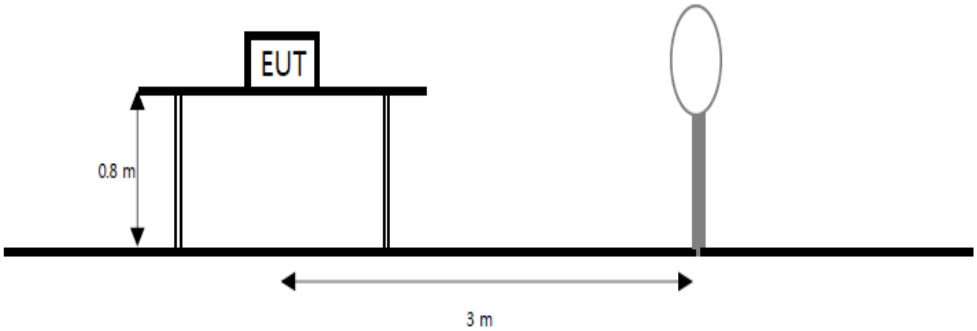

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 ㎒ to 1 ㎓ emissions.

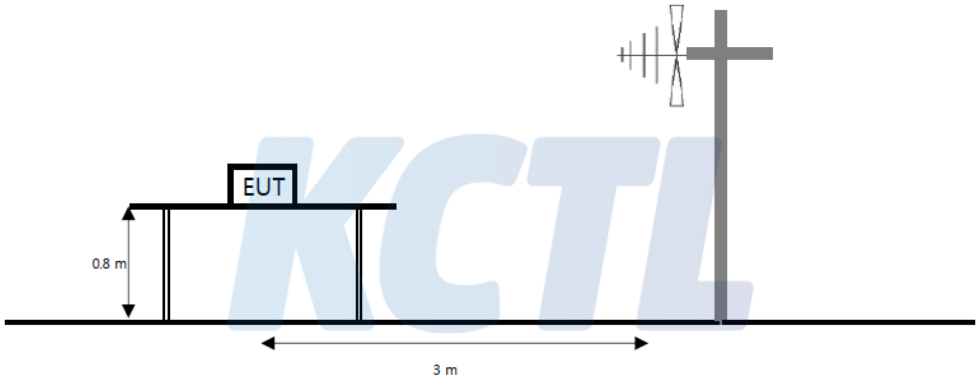

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 ㎓ to the tenth harmonic of the highest fundamental frequency or to 40 ㎓ emissions, whichever is lower.

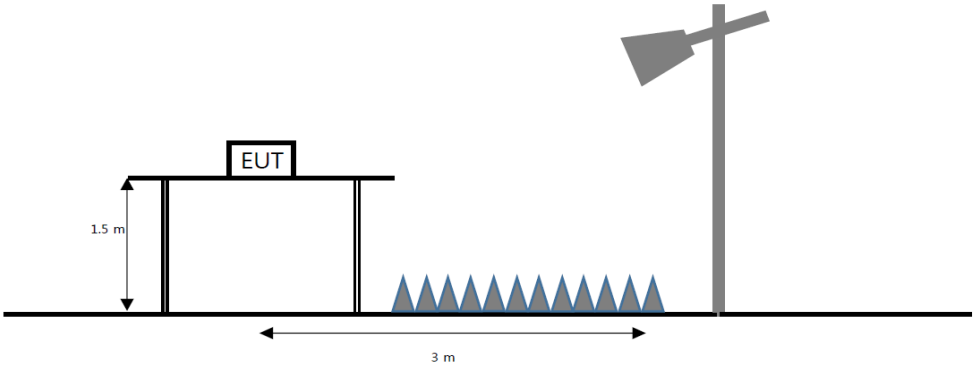

According to section 15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (㎒)	Field strength (㎛V/m)	Measurement distance (m)
0.009 - 0.490	2 400/F(㎑)	300
0.490 - 1.705	24 000/F(㎑)	30
1.705 - 30	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 ㎒, 76–88 ㎒, 174–216 ㎒ or 470–806 ㎒. However, operation within these frequency bands is permitted under other sections of this part, e.g., Section15.231 and 15.241.

According to section 15.205(a) and (b), only spurious emissions are permitted in any of the frequency bands listed below:

㎒	㎒	㎒	㎓
0.009 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.694 75 - 16.695 25	608 - 614	5.35 - 5.46
2.173 5 - 2.190 5	16.804 25 - 16.804 75	960 – 1 240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1 300 – 1 427	8.025 - 8.5
4.177 25 - 4.177 75	37.5 - 38.25	1 435 – 1 626.5	9.0 - 9.2
4.207 25 - 4.207 75	73 - 74.6	1 645.5 – 1 646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1 660 – 1 710	10.6 - 12.7
6.267 75 - 6.268 25	108 - 121.94	1 718.8 – 1 722.2	13.25 - 13.4
6.311 75 - 6.312 25	123 - 138	2 200 – 2 300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2 310 – 2 390	15.35 - 16.2
8.362 - 8.366	156.524 75 - 156.525 25	2 483.5 – 2 500	17.7 - 21.4
8.376 25 - 8.386 75		2 690 – 2 900	22.01 - 23.12
8.414 25 - 8.414 75	156.7 - 156.9	3 260 – 3 267	23.6 - 24.0
12.29 - 12.293	162.012 5 - 167.17	3 332 – 3 339	31.2 - 31.8
12.519 75 - 12.520 25	167.72 - 173.2	3 345.8 – 3 358	36.43 - 36.5
12.576 75 - 12.577 25	240 - 285	3 600 – 4 400	Above 38.6
13.36 - 13.41	322 - 335.4		

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in section 15.209. At frequencies equal to or less than 1 000 ㎒, compliance with the limits in section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1 000 ㎒, compliance with the emission limits in section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in section 15.35 apply to these measurements.

Test procedure

ANSI C63.10-2013 - Section 6.6.4.3

Test settings

Peak field strength measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in table
3. VBW ≥ (3×RBW)
4. Detector = peak
5. Sweep time = auto
6. Trace mode = max hold
7. Allow sweeps to continue until the trace stabilizes

Table. RBW as a function of frequency

Frequency	RBW
9 ㎑ to 150 ㎑	200 ㎐ to 300 ㎐
0.15 ㎒ to 30 ㎒	9 ㎑ to 10 ㎑
30 ㎒ to 1 000 ㎒	100 ㎑ to 120 ㎑
> 1 000 ㎒	1 ㎒

Average field strength measurements

Trace averaging with continuous EUT transmission at full power

If the EUT can be configured or modified to transmit continuously (D ≥ 98%), then the average emission levels shall be measured using the following method (with EUT transmitting continuously):

1. RBW = 1 ㎒ (unless otherwise specified).
2. VBW ≥ (3×RBW).
3. Detector = RMS (power averaging), if [span / (# of points in sweep)] ≤ (RBW / 2). Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
4. Averaging type = power (i.e., rms):
   1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
   2) Some instruments require linear display mode to use linear voltage averaging. Log or ㏈ averaging shall not be used.
5. Sweep time = auto.
6. Perform a trace average of at least 100 traces.

Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT (D ≥ 98%) cannot be achieved and the duty cycle is constant (duty cycle variations are less than ±2%), then the following procedure shall be used:

1. The EUT shall be configured to operate at the maximum achievable duty cycle.
2. Measure the duty cycle D of the transmitter output signal as described in 11.6.
3. RBW = 1 ㎒ (unless otherwise specified).
4. VBW ≥ [3 × RBW].
5. Detector = RMS (power averaging), if [span / (# of points in sweep)] ≤ (RBW / 2). Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
6. Averaging type = power (i.e., rms):
   1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
   2) Some instruments require linear display mode to use linear voltage averaging. Log or ㏈

averaging shall not be used.

7. Sweep time = auto.
8. Perform a trace average of at least 100 traces.
9. A correction factor shall be added to the measurement results prior to comparing with the emission limit to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
   1) If power averaging (rms) mode was used in step f), then the applicable correction factor is [10 log (1 / D)], where D is the duty cycle.
   2) If linear voltage averaging mode was used in step f), then the applicable correction factor is [20 log (1 / D)], where D is the duty cycle.
   3) If a specific emission is demonstrated to be continuous (D ≥ 98%) rather than turning ON and OFF with with the transmit cycle, then no duty cycle correction is required for that emission.

Notes:

1. Factors(dB) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB) + or F_d(dB)
2. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
3. Average test would be performed if the peak result were greater than the average limit.
4. [1)] mean is restricted band.

This test report shall not be reproduced, except in full, without the written approval

Test Plot

BLE 1 MBit/s(37 Bytes) / Band-edge

0 Channel

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
2 378.29[1)]	H	39.43	31.86	-29.10	-	42.19	74.00	31.81
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for Band-edge

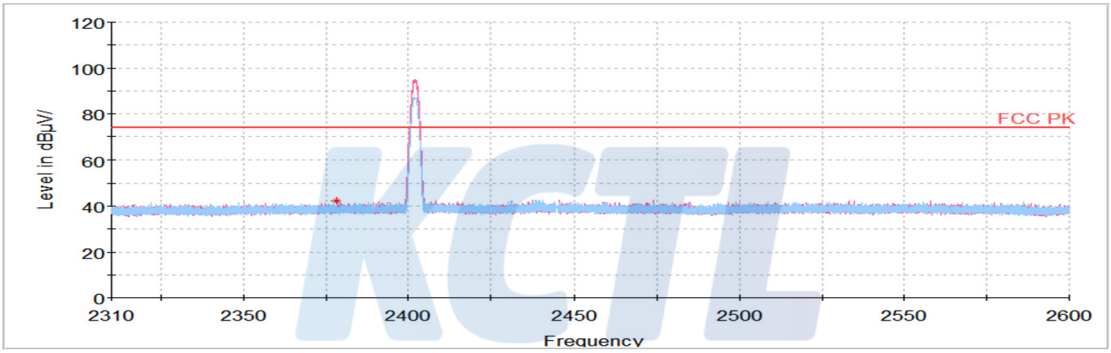

BLE 1 MBit/s(37 Bytes) / RSE

39 Channel

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
4 959.97[1)]	H	61.34	33.98	-54.59	-	40.73	74.00	33.27
Average Data								
No spurious emissions were detected within 20 ㏈ of the limit.								

Horizontal/Vertical for 3.5 ㎓ ~ 18 ㎓

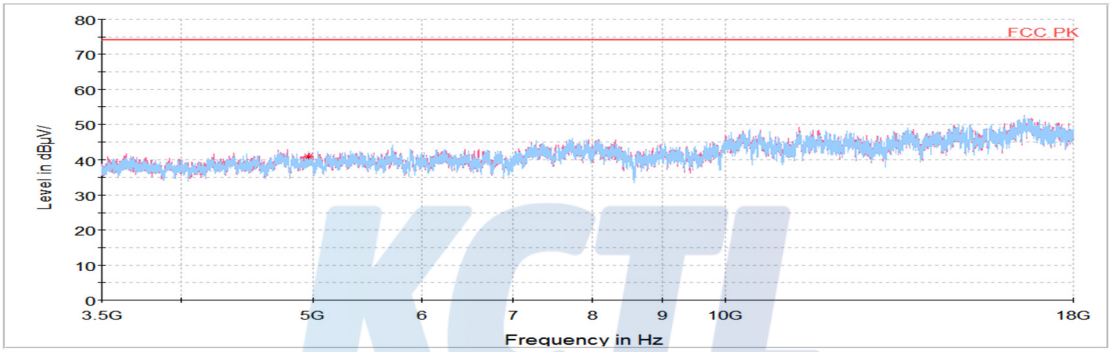

7.3. AC Conducted emission

Test setup

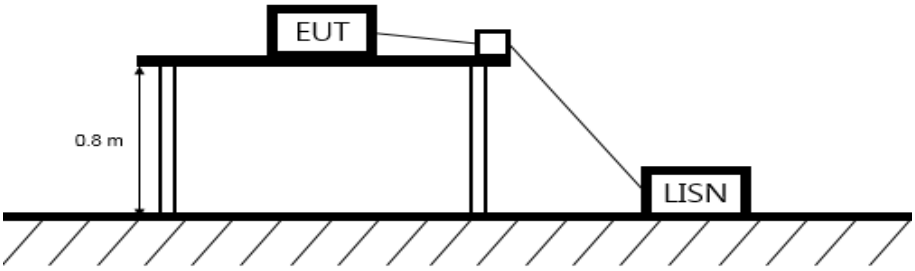

Limit

According to 15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 ㎑ to 30 ㎒, shall not exceed the limits in the following table, as measured using a 50uH/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.

Frequency of Emission (㎒)	Conducted limit (dBμV/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

Test procedure

ANSI C63.10-2013 - Section 6.2

Test settings

1. The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 ㎝ in which is located 40 ㎝ away from the vertical wall and 1.5m away from the side wall of the shielded room.
2. Each current-carrying conductor of the EUT power cord was individually connected through a 50Ω/50μH LISN, which is an input transducer to a spectrum analyzer or an EMI/Field Intensity Meter, to the input power source.
3. Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
4. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment is the system) was then performed over the frequency range of 0.15 ㎒ to 30 ㎒.
5. The measurements were made with the detector set to peak amplitude within a bandwidth of 10 ㎑ or to quasi-peak and average within a bandwidth of 9 ㎑. The EUT was in transmitting mode during the measurements.

Test results

Worst case: BLE_1 MBit/s(37 Bytes) / 19 Channel

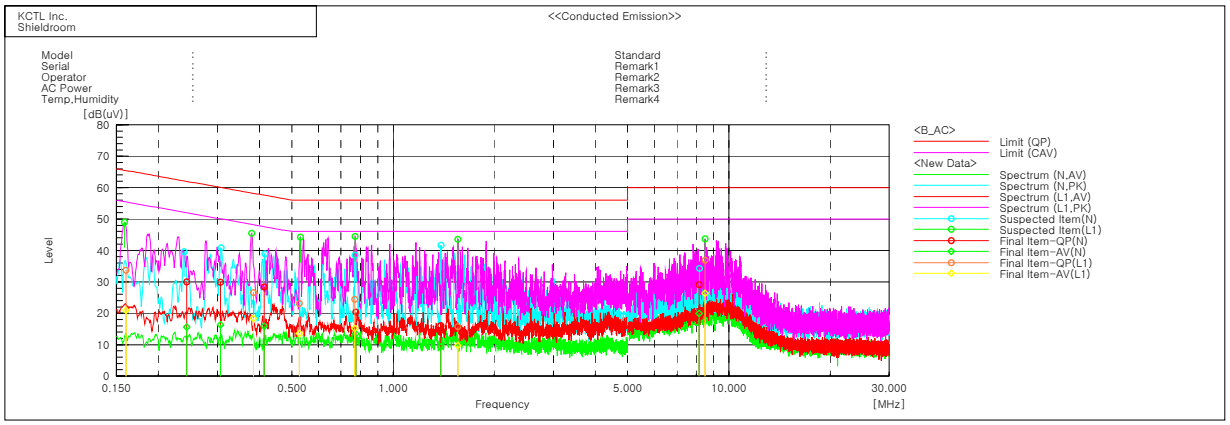

Final Result

--- N Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.24286	20.4	6.0	9.6	30.0	15.6	62.0	52.0	32.0	36.4
2	0.30637	20.1	6.6	9.7	29.8	16.3	60.1	50.1	30.3	33.8
3	0.41356	18.6	6.0	9.8	28.4	15.8	57.6	47.6	29.2	31.8
4	0.77509	10.6	3.7	9.8	20.4	13.5	56.0	46.0	35.6	32.5
5	1.38704	6.4	-0.4	9.7	16.1	9.3	56.0	46.0	39.9	36.7
6	8.15901	19.3	10.3	9.7	29.0	20.0	60.0	50.0	31.0	30.0

--- L1 Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.16015	23.7	10.9	10.0	33.7	20.9	65.5	55.5	31.8	34.6
2	0.38386	16.8	8.5	9.8	26.6	18.3	58.2	48.2	31.6	29.9
3	0.52632	13.2	3.6	9.9	23.1	13.5	56.0	46.0	32.9	32.5
4	0.76832	14.6	5.4	9.8	24.4	15.2	56.0	46.0	31.6	30.8
5	1.55764	6.0	0.0	9.7	15.7	9.7	56.0	46.0	40.3	36.3
6	8.48434	27.2	16.7	9.7	36.9	26.4	60.0	50.0	23.1	23.6

This test report shall not be reproduced, except in full, without the written approval

8. Measurement equipment

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
Spectrum Analyzer	R&S	FSV40	100988	20.01.04
Spectrum Analyzer	R&S	FSW50	101013	20.05.13
Wideband Power Sensor	R&S	NRP-Z81	102398	20.01.25
ATTENUATOR	R&S	DNF Dämpfungsglied 10 dB in N-50 Ohm	31212	20.05.13
Horn antenna	ETS.lindgren	3116	00086632	20.02.15
Horn antenna	ETS.lindgren	3117	155787	20.10.24
Attenuator	API Inmet	40AH2W-10	12	20.05.15
Broadband PreAmplifier	SCHWARZBECK	BBV9718	216	20.07.30
AMPLIFIER	L-3 Narda-MITEQ	AMF-7D-01001800 -22-10P	2031196	20.02.21
AMPLIFIER	L-3 Narda-MITEQ	JS44-18004000-33-8P	2000996	20.01.28
Antenna Mast	Innco Systems	MA4000-EP	303	-
Turn Table	Innco Systems	DT2000	79	-
Highpass Filter	WT	WT-A1698-HS	WT160411001	20.05.14
TWO-LINE V - NETWORK	R&S	ENV216	101358	20.04.05
EMI TEST RECEIVER	R&S	ESCI	100001	20.08.22
Vector Signal Generator	R&S	SMBV100A	257566	20.01.04
Signal Generator	R&S	SMR40	100007	20.05.13

End of test report

This test report shall not be reproduced, except in full, without the written approval