verify No.089824695210

위변조방지/진위확인
www.docuqr.com

TEST REPORT

KCTL Inc.
65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

KCTL

1. Client

- Name : Samsung Electronics Co., Ltd.
- Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
- Date of Receipt : 2021-04-13

2. Use of Report : Certification

3. Name of Product / Model : Smart Wearable / SM-R870

4. Manufacturer / Country of Origin : Samsung Electronics Co., Ltd. / Vietnam

5. FCC ID : A3LSMR870

6. IC Certificate No. : 649E-SMR870

7. Date of Test : 2021-04-28 to 2021-06-09

8. Location of Test : ■ Permanent Testing Lab ☐ On Site Testing
(Address:65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea)

9. Test method used : FCC Part 15 Subpart E, 15.407
RSS-247 Issue 2 February 2017
RSS-Gen Issue 5 April 2018

10. Test Result : Refer to the test result in the test report

Affirmation	Tested by Name : Sunghyun Yoon (Signature)	Technical Manager Name : Seungyong Kim (Signature)

2021-06-14

KCTL Inc.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.

REPORT REVISION HISTORY

Date	Revision	Page No
2021-06-10	Originally issued	-
2021-06-11	Updated	10
2021-06-14	Updated	10, 25, 27, 31

This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

Note. The report No. KR21-SRF0112-A is superseded by the report No. KR21-SRF0112-B.

General remarks for test reports

Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

☐ **Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:**

Procedure number, issue date and title:

Calculations leading to the reported values are on file with the testing laboratory that conducted the testing.

☒ **Statement not required by the standard or client used for type testing**

CONTENTS

1. General information 4
2. Device information 4
2.1. Frequency/channel operations 6
2.2. Simultaneous Tx Condition 7
2.3. Duty Cycle Factor 7
3. Antenna requirement 8
4. Introduction 9
4.1 Difference 9
4.2 Spot check verification data (Band-edge & Spurious emission) 9
4.3 Reference Detail 10
4. Summary of tests 11
5. Measurement uncertainty 12
6. Measurement results explanation example 13
7. Test results 14
7.1. Maximum conducted output power 14
7.2. Maximum Power Spectral Density 18
7.3. 26 dB Bandwidth & 99% Bandwidth 23
7.4. 6 dB Bandwidth 29
7.5. Straddle channel 32
7.6. Spurious Emission, Band Edge and Restricted bands 36
7.7. AC Conducted emission 69
8. Measurement equipment 71

1. General information

Client	:	Samsung Electronics Co., Ltd.
Address	:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
Manufacturer	:	Samsung Electronics Co., Ltd.
Address	:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
Laboratory	:	KCTL Inc.
Address	:	65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
Accreditations	:	FCC Site Designation No: KR0040, FCC Site Registration No: 687132
		VCCI Registration No. : R-20080, G-20078, C-20059, T-20056
		CAB Identifier: KR0040
		ISED Number: 8035A
		KOLAS No.: KT231

2. Device information

Equipment under test	:	Smart Wearable
Model	:	SM-R870
Derivative model	:	SM-R870X
Modulation technique	:	Bluetooth(BDR/EDR)_GFSK, π/4DQPSK, 8DPSK
		Bluetooth(BLE)_GFSK
		WIFI(802.11a/b/g/n)_DSSS, OFDM
Number of channels	:	Bluetooth(BDR/EDR)_79 ch / Bluetooth(BLE)_40 ch
		802.11b/g/n_HT20 : 13 ch
		UNII-1: 4 ch (20 MHz)
		UNII-2A: 4 ch (20 MHz)
		UNII-2C: 12 ch (20 MHz)
		UNII-3: 5 ch (20 MHz)
Power source	:	DC 3.88 V
Antenna specification	:	WIFI/Bluetooth(BDR/EDR/BLE)_LDS Antenna
Antenna gain	:	WIFI/Bluetooth(BDR/EDR/BLE)_-7.70 dBi
		UNII-1 : -9.20 dBi
		UNII-2A : -7.30 dBi
		UNII-2C : -8.10 dBi
		UNII-3 : -7.60 dBi
Frequency range	:	Bluetooth(BDR/EDR/BLE)_2 402 MHz ~ 2 480 MHz
		2 412 MHz ~ 2 472 MHz (802.11b/g/n_HT20)
		UNII-1: 5 180 MHz ~ 5 240 MHz (802.11a/n_HT20)
		UNII-2A: 5 260 MHz ~ 5 320 MHz (802.11a/n_HT20)
		UNII-2C: 5 500 MHz ~ 5 720 MHz (802.11a/n_HT20)
		UNII-3: 5 745 MHz ~ 5 825 MHz (802.11a/n_HT20)

Software version	:	SM-R870_R870.001, SM-R870X_R870X.001
Hardware version	:	REV1.0
Test device serial No.	:	Conducted(410003fbe4b4482f) Radiated(R3AR404DTRF)
Operation temperature	:	-30 ℃ ~ 50 ℃

Note.

1. Only SM-R870 will be filed for ISED certification.
2. The product equality letter includes detailed information about the differences between basic and derivative model.

2.1. Frequency/channel operations

This device contains the following capabilities:
WiFi (802.11a/b/g/n), Bluetooth (BDR/EDR/BLE)

UNII-1

Ch.	Frequency (MHz)
36	5 180
40	5 200
48	5 240

UNII-2A

Ch.	Frequency (MHz)
52	5 260
56	5 280
64	5 320

UNII-2C

Ch.	Frequency (MHz)
100	5 500
120	5 600
140	5 700
144	5 720

UNII-3

Ch.	Frequency (MHz)
149	5 745
157	5 785
165	5 825

Table 2.1-1. 802.11a/n_HT20 mode

2.2. Simultaneous Tx Condition

Mode	Bluetooth	WLAN 5 GHz
WLAN 5 GHz + Bluetooth	O	O

2.3. Duty Cycle Factor

Test mode	Period (ms)	T_{on} time (ms)	Duty cycle		Duty cycle factor (dB)
			(Linear)	(%)	
802.11a	1.541 4	1.418 4	0.920 2	92.02	0.36
802.11n_HT20	1.438 2	1.331 4	0.925 7	92.57	0.34

Notes.

1. Duty cycle (Linear) = T_{on} time / Period
2. DCF(Duty cycle factor) = 10log(1/duty cycle)
3. DCF is not compensated to average result if duty cycle is more than 98%

802.11a	802.11n_HT20
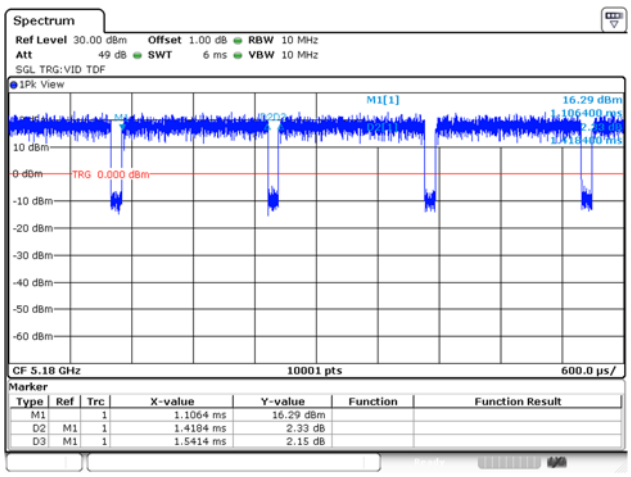	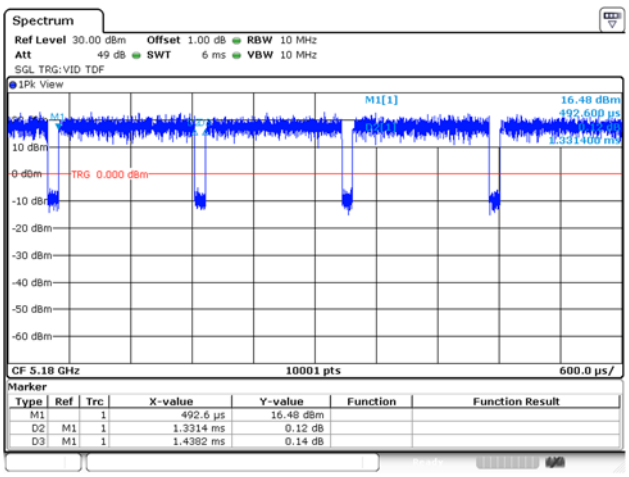

3. Antenna requirement

Requirement of FCC part section 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Requirement of RSS-Gen Section 6.8:

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

- The transmitter has permanently attached LDS Antenna (Internal antenna) on board.
- The E.U.T Complies with the requirement of §15.203, §15.247.

4. Introduction

This report referenced from the FCC ID : A3LSMR875 and IC : 649E-SMR875.
Based on their similarity, the FCC Part 15E and RSS-247 (equipment class: NII) reuse the original model's result and do spot-check, following the FCC KDB 484596 D01 v01.
And the applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID and IC ID.

4.1 Difference

The FCC ID: A3LSMR870 & IC: 649E-SMR870 shares the same enclosure and circuit board as FCC ID: A3LSMR875 & IC: 649E-SMR875. The WIFI/BT/BLE antenna and surrounding circuitry and layout are identical between these two units.
As for all bands, they have been verified and the parent model test results under FCC ID : A3LSMR875 & IC: 649E-SMR875 shall remain representative of FCC ID : A3LSMR870 & IC: 649E-SMR870.

Note. The Product equality letter includes detailed information about the differences between FCC ID: A3LSMR875 & IC: 649E-SMR875 and FCC ID: A3LSMR870 & IC: 649E-SMR870.

4.2 Spot check verification data (Band-edge & Spurious emission)

Test band	Test item	Test mode	Channel	Measured frequency (MHz)	SM-R875U (dBμV)		SM-R870 (dBμV)		Deviation (dB)	
					Avg.	Peak	Avg.	Peak	Avg.	Peak
UNII-1	Band edge	802.11n HT20	36	5 149.31	41.47	54.39	44.17	54.27	-2.70	0.12
	RSE	802.11a	40	10 398.14	-	49.19	-	46.83	-	2.36
UNII-2A	Band edge	802.11n HT20	64	5 350.35	42.78	52.20	43.63	51.48	-0.85	0.72
	RSE	802.11a	56	10 559.14	-	47.81	-	48.25	-	-0.44
UNII-2C	Band edge	802.11n HT20	100	5 459.50	46.88	53.18	42.53	51.22	4.35	1.96
	RSE	802.11a	120	16 820.17	-	51.14	-	51.03	-	0.11
UNII-3	Band edge	802.11a	149	5 723.30	-	63.41	-	60.44	-	2.97
	RSE	802.11n HT20	157	17 355.64	-	49.77	-	50.59	-	-0.82

Notes:
1. For FCC ID: A3LSMR870 & IC: 649E-SMR870 has been verified the performance as for WIFI identical with the FCC ID: A3LSMR875 & IC: 649E-SMR875.
2. Comparison of two models, upper deviation is within 3 dB range and all test results are under FCC technical limits.
3. The test procedure(s) in this report were performed in accordance as following.
   - KDB 484596 D01 v01

4.3 Reference Detail

Reference application that contains the reused reference data in the individual test reports

Equipment Class	Reference FCC ID & IC ID	Application Type	Reference Test report Number	Exhibit Type	Variant Test Report Number	Date Re-used
DTS	A3LSMR875 649E-SMR875	Original	KR21-SRF0095 (802.11b/g/n)	Test report	KR21-SRF0111	All
			KR21-SRF0094 (Bluetooth LE)	Test report	KR21-SRF0110	All
DSS	A3LSMR875 649E-SMR875	Original	KR21-SRF0093 (Bluetooth)	Test report	KR21-SRF0109	All
NII	A3LSMR875 649E-SMR875	Original	KP21-SRF0096 (802.11a/n)	Test report	KR21-SRF0112	All
			KR21-SRF0097 (DFS)	Test report	KR21-SRF0113	All

4. Summary of tests

FCC Part section(s)	IC Rule Reference	Parameter	Test Condition	Test results
15.407(a)	RSS-247 Issue 2, 6.2	Maximum conducted output power	Conducted	Pass
15.407(a)	RSS-247 Issue 2, 6.2	Maximum power spectral density		Pass
15.407(a)	RSS-Gen Issue 5, 6.7	26 dB Channel Bandwidth		Pass
15.407(e)	RSS-247 Issue 2, 6.2.4	6 dB Channel Bandwidth		Pass
-	RSS-Gen Issue 5, 6.7	Occupied Bandwidth		Pass
15.207(a)	RSS-Gen Issue 5, 8.8	AC Conducted Emissions		Pass
15.407(b), 15.205(a), 15.209(a)	RSS-Gen Issue 5, 8.9, 8.10 RSS-247 Issue 2, 6.2,	Spurious emission	Radiated	Pass

Notes:

1. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
2. According to exploratory test no any obvious emission were detected from 9 ㎑ to 30 ㎒. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
3. All the radiated tests have been performed two modes (with charger and without charger) and the fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z.

	with charger			without charger		
	X	Y	Z	X	Y	Z
Band-edge					√	
Spurious	√					

4. The test procedure(s) in this report were performed in accordance as following.
   - ANSI C63.10-2013
   - KDB 789033 D02 v02r01
5. Based on the baseline scan, the worst-case data rates were:
   802.11a mode: 6Mbps
   802.11n HT20 mode: MCS0

5. Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of *k*=2 to indicated a 95 % level of confidence. The measurement data shown herein meets of exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded uncertainty (±)	
Conducted RF power	0.9 dB	
Conducted spurious emissions	1.6 dB	
Radiated spurious emissions	9 kHz ~ 30 MHz:	2.3 dB
	30 MHz ~ 1 000 MHz	2.2 dB
	1 000 MHz ~ 18 000 MHz	5.6 dB
	Above 18 000 MHz	5.7 dB
Conducted emissions	9 kHz ~ 150 kHz	3.7 dB
	150 kHz ~ 30 MHz	3.3 dB

6. Measurement results explanation example

The offset level is set in the spectrum analyzer to compensate the RF cable loss factor between EUT conducted output port and spectrum analyzer.
With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Frequency (MHz)	Factor(dB)	Frequency (MHz)	Factor(dB)
30	9.78	9 000	12.55
50	9.83	10 000	12.71
100	9.89	11 000	13.07
200	10.04	12 000	13.15
300	10.13	13 000	13.20
400	10.22	14 000	13.27
500	10.32	15 000	13.39
600	10.36	16 000	13.67
700	10.39	17 000	13.28
800	10.45	18 000	13.31
900	10.52	19 000	13.50
1 000	10.53	20 000	13.70
2 000	11.31	21 000	13.88
3 000	11.78	22 000	13.98
4 000	12.25	23 000	14.32
5 000	12.51	24 000	14.36
6 000	12.73	25 000	14.40
7 000	12.19	26 000	14.53
8 000	12.42	26 500	14.62

Notes:
Offset(dB) = RF cable loss(dB) + Attenuator(dB)

7. Test results

7.1. Maximum conducted output power

Test setup



Limit

According to §15.407(a), RSS-247(6.2)

FCC

Band	EUT category		Conducted output power limit
UNII-1		Outdoor access point	1 W (30 dBm)
		Indoor access point	
		Fixed point-to-point access point	
	√	Client device	250 mW (23.98 dBm)
UNII-2A	√		250 mW or 11 dBm + 10logB[1)]
UNII-2C	√		250 mW or 11 dBm + 10logB[1)]
UNII-3	√		1 W (30 dBm)

IC

Band	Maximum e.i.r.p. limit
UNII-1	200 mW or 10 + 10 log10B[2)], dBm
UNII-2A	1 W or 17 dBm + 10logB[2)]
UNII-2C	1 W or 17 dBm + 10logB[2)]
UNII-3	1 W (30 dBm)

Note:

1) Conducted output power limit B is the 26 dB emission bandwidth.
2) Maximum e.i.r.p. limit B is the 99% emission bandwidth.

Test procedure

ANSI C63.10-2013-Section 12.3.3.2 and 14.2
KDB 789033 D02 v02r01 - Section E.2.d) or e)

Test settings
Used test method is Section E.2.d)

◆ **KDB 789033 D02 v02r01**

Section E.2.d)
Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction):

(i) Measure the duty cycle, x, of the transmitter output signal as described in II.B.
(ii) Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
(iii) Set RBW = 1 ㎒
(iv) Set RBW ≥ 3 ㎒
(v) Number of points in sweep ≥ 2 X span/RBW. (This ensures that bin-to-bin spacing is ≤ RBW/2, so that narrowband signals are not lost between frequency bins.)
(vi) Sweep time = auto.
(vii) Detector = power averaging (rms), if available. Otherwise use sample detector mode.
(viii) Do not use sweep triggering. Allow the sweep to "free run."
(ix) Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
(x) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 ㎒ intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
(xi) Add 10 log (1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add 10 log(1/0,25) = 6 ㏈ if the duty cycle is 25%.

Section E.2.e)
Method SA-2 Alternative (power averaging(rms) detection with slow sweep with each spectrum bin averaging across on and off times of the EUT transmissions, followed by duty cycle correction):

(i) Measure the duty cycle, x, of the transmitter output signal as described in II.B.
(ii) Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
(iii) Set RBW = 1 ㎒
(iv) Set RBW ≥ 3 ㎒
(v) Number of points in sweep ≥ 2 X span/RBW. (This ensures that bin-to-bin spacing is ≤ RBW/2, so that narrowband signals are not lost between frequency bins.)
(vi) Manually set sweep time ≥ 10 X (number of points in sweep) X (total on/off period of the transmitted signal).
(vii) Set detector = power averaging (rms).
(viii) Perform a single sweep.
(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If

the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 ㎒ intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

(x) Add 10 log (1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add 10 log(1/0,25) = 6 ㏈ if the duty cycle is 25%.

Section E.3.a)
Method PM (Measurement using an RF average power meter):

(xi) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied:

- The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
- At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
- The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five

(xii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in II

(xiii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

(xiv) Adjust the measurement in ㏈m by adding 10 log (1/x) where x is the duty cycle (e.g., 10 log (1/0.25) if the duty cycle is 25%).

Section E.3.b)
Method PM-G (Measurement using a gated RF average power meter):
Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Test results

Test mode	Band	Frequency (MHz)	Measured output power				
			Conducted output power (dBm)	Limit (dBm)	ANT Gain (dBi)	Max.e.i.r.p (dBm)	Max e.i.r.p Limit (dBm)
802.11a	UNII 1	5 180	14.70	23.98	-9.20	5.50	22.23
		5 200	14.39			5.19	
		5 240	14.58			5.38	
	UNII 2A	5 260	14.38	23.98	-7.30	7.08	29.23
		5 280	14.49			7.19	
		5 320	14.62			7.32	
	UNII 2C	5 500	14.64	23.98	-8.10	6.54	29.23
		5 600	14.55			6.45	
		5 700	14.58			6.48	
	UNII 3	5 745	14.35	30.00	-7.60	6.75	30.00
		5 785	14.26			6.66	
		5 825	14.21			6.61	
802.11n HT20	UNII 1	5 180	14.52	23.98	-9.20	5.32	22.51
		5 200	14.37			5.17	
		5 240	14.35			5.15	
	UNII 2A	5 260	14.46	23.98	-7.30	7.16	29.51
		5 280	14.43			7.13	
		5 320	14.35			7.05	
	UNII 2C	5 500	14.49	23.98	-8.10	6.39	29.52
		5 600	14.41			6.31	
		5 700	14.24			6.14	
	UNII 3	5 745	14.23	30.00	-7.60	6.63	30.00
		5 785	14.21			6.61	
		5 825	14.06			6.46	

Notes:
1. Conducted output power(Average) = reading value of average power + D.C.F
2. e.i.r.p. Calculation: e.i.r.p. (dBm) = Conducted output power (dBm) + Antenna gain (dBi)

7.2. Maximum Power Spectral Density

Test setup

EUT	—	Attenuator	—	Spectrum analyzer

Limit

According to §15.407(a), RSS-247(6.2)

Band	EUT category		Limit
UNII-1		Outdoor access point	17dBm/MHz
		Indoor access point	
		Fixed point-to-point access point	
	√	Client device	11 dBm /MHz
UNII-2A	√		11 dBm /MHz
UNII-2C	√		11 dBm /MHz
UNII-3	√		30 dBm /500 kHz

Notes:

If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power And the peak power spectral density shall be reduced by the amount in dB that the directional gain if the antenna exceed 6 dBi

Test procedure

ANSI C63.10-2013 Section 12.3.2.2, 14.3.2.2
KDB 789033 D02 v02r01 - Section F

Test settings

Section F

The rules requires "maximum power spectral density" measurements where the intent is to measure the maximum value of the time average of the power spectral density measured during a period of continuous transmission. Refer to III.A for additional guidance for devices that use channel aggregation.

1. Create an average power spectrum for the EUT operating mode being tested by following the instructions in II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power…." (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
2. Search function on the instrument to find the peak of the spectrum and record its value.
3. Adjustments to the peak value of the spectrum, if applicable:

   a) If Method SA-2 or SA-2 Alternative was used, add 10 log (1/x), where x is the duty cycle, to the peak of the spectrum.
   b) If Method SA-3 Alternative was used and the linear mode was used in II.E.2.g) (viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
4. The result is the Maximum PSD over 1MHz reference bandwidth
5. For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the preceding procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference

bandwidth specified in Section 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of RBWs less than 1MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth(i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

a) Set RBW≥1/T, where T is defined in II.B.I.a).
b) Set VBW≥3 RBW.
c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add 10 log (500 kHz /RBW) to the measured result, whereas RBW (<500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add 10 log (1MHz/RBW) to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the II.F.5.c) and II.F.5.d), since RBW=100 kHz is available on nearly all spectrum analyzers.

Test results

Test mode	Band	Frequency (MHz)	Measured PSD (dBm/MHz)	DCF (dB)	Maximum PSD (dB m/MHz)	Limit (dBm/MHz)
802.11a	UNII 1	5 180	3.58	0.36	3.94	11.00
		5 200	3.64	0.36	4.00	
		5 240	3.75	0.36	4.11	
	UNII 2A	5 260	3.92	0.36	4.28	11.00
		5 280	4.14	0.36	4.50	
		5 320	3.69	0.36	4.05	
	UNII 2C	5 500	2.24	0.36	2.60	11.00
		5 600	2.31	0.36	2.67	
		5 700	1.35	0.36	1.71	
802.11n HT20	UNII 1	5 180	3.68	0.34	4.02	11.00
		5 200	3.08	0.34	3.42	
		5 240	3.49	0.34	3.83	
	UNII 2A	5 260	3.74	0.34	4.08	11.00
		5 280	3.93	0.34	4.27	
		5 320	3.17	0.34	3.51	
	UNII 2C	5 500	1.82	0.34	2.16	11.00
		5 600	1.89	0.34	2.23	
		5 700	1.42	0.34	1.76	

Test mode	Band	Frequency (MHz)	Measured PSD (dBm /500 kHz)	DCF (dB)	Maximum PSD (dBm /500 kHz)	Limit (dBm /500 kHz)
802.11a	UNII 3	5 745	-1.79	0.36	-1.43	30.00
		5 785	-1.41	0.36	-1.05	
		5 825	-1.35	0.36	-0.99	
802.11n HT20		5 745	-2.20	0.34	-1.86	
		5 785	-1.67	0.34	-1.33	
		5 825	-1.51	0.34	-1.17	

Notes:
1. Maximum PSD calculation
- Maximum PSD = Measured PSD + D.C.F

Power Spectral Density

In order to simplify the report, attached plots were only the Worst Case per bandwidth.

UNII-1 / 802.11a / Low ch.	UNII-2A / 802.11a / Low ch.
UNII-1 / 802.11a / Mid ch.	**UNII-2A / 802.11a / Mid ch.**
UNII-1 / 802.11a / High ch.	**UNII-2A / 802.11a / High ch.**
	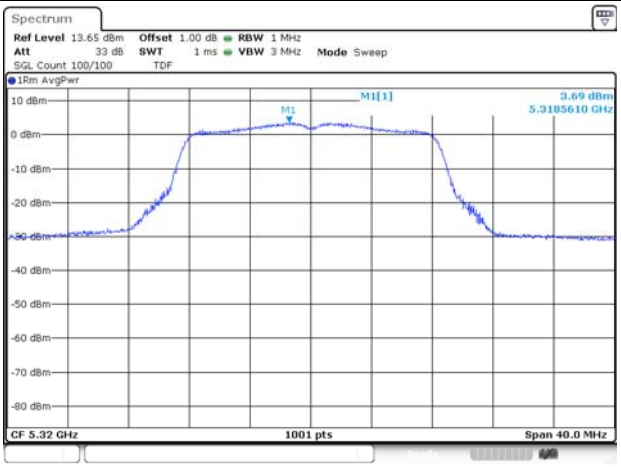

UNII-2C / 802.11a / Low ch.

UNII-3 / 802.11a / Low ch.

UNII-2C / 802.11a / Mid ch.

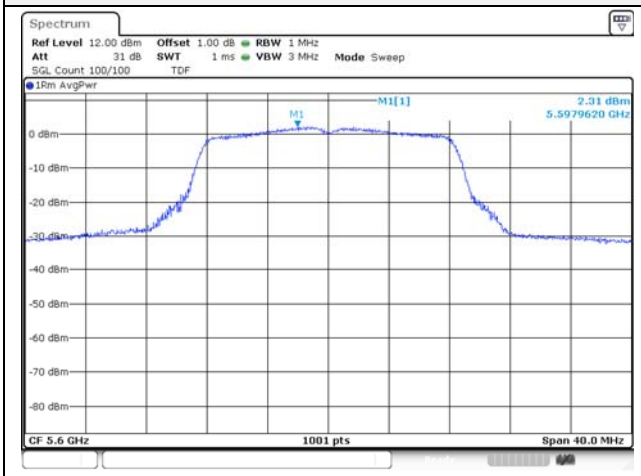

UNII-3 / 802.11a / Mid ch.

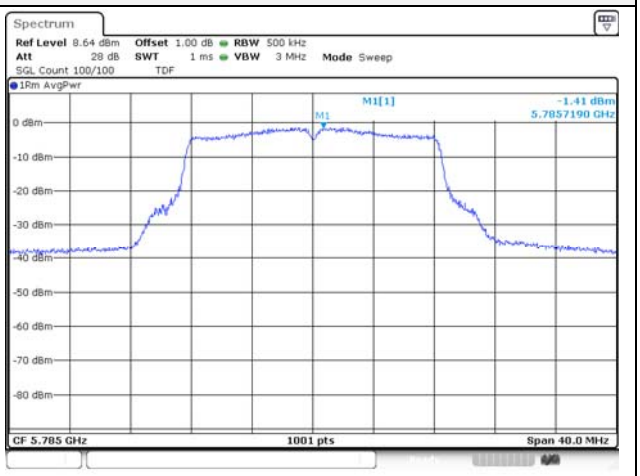

UNII-2C / 802.11a / High ch.

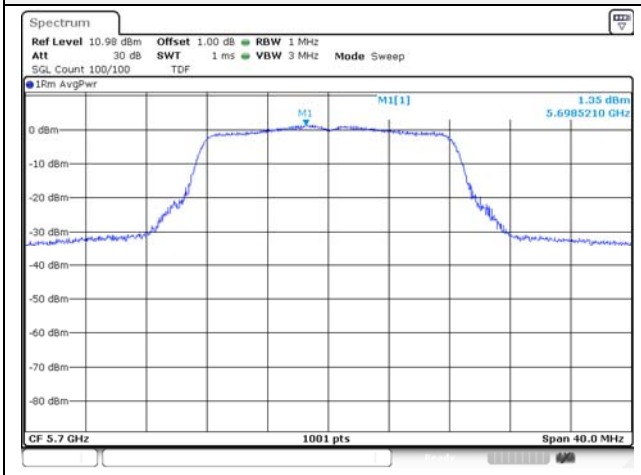

UNII-3 / 802.11a / High ch.

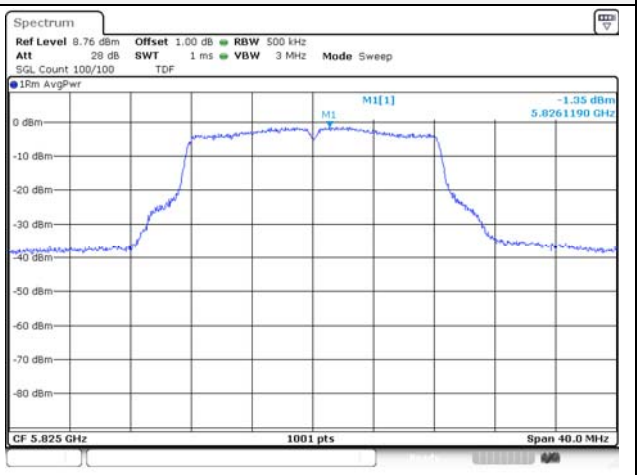

7.3. 26 dB Bandwidth & 99% Bandwidth

Test setup



Limit

N/A

Test procedure

ANSI C63.10-2013 Section 12.4
KDB 789033 D02 v02r01 - Section C.1 (26dB bandwidth)
KDB 789033 D02 v02r01 - Section D (99% bandwidth)

Test settings

1. 26 dB Bandwidth

a. Set RBW = approximately 1% of the emission bandwidth.
b. Set the VBW > RBW.
c. Detector = Peak.
d. Trace mode = max hold.
e. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. 99% Occupied Bandwidth

a. Set center frequency to the nominal EUT channel center frequency.
b. Set span = 1.5 times to 5.0 times the OBW.
c. Set RBW = 1% to 5% of the OBW
d. Set VBW ≥ 3 x RBW
e. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
f. Use the 99% power bandwidth function of the instrument (if available).
g. If the instrument does not have a 99% power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

Test results

Test mode	Band	Frequency(㎒)	26 ㏈ bandwidth (㎒)	99% bandwidth (㎒)
802.11a	UNII-1	5 180	22.08	16.73
		5 200	21.78	16.73
		5 240	21.73	16.73
	UNII-2A	5 260	21.93	16.73
		5 280	21.68	16.73
		5 320	21.88	16.73
	UNII-2C	5 500	21.93	16.73
		5 600	22.28	16.73
		5 700	21.93	16.73
802.11n HT20	UNII-1	5 180	22.18	17.83
		5 200	22.08	17.93
		5 240	22.13	17.88
	UNII-2A	5 260	22.18	17.83
		5 280	21.98	17.88
		5 320	22.08	17.93
	UNII-2C	5 500	22.23	17.88
		5 600	22.33	17.98
		5 700	22.03	17.93

26dB Bandwidth

In order to simplify the report, only 802.11n mode test plots are attached.

UNII-1 / 802.11n HT20 / Low ch.

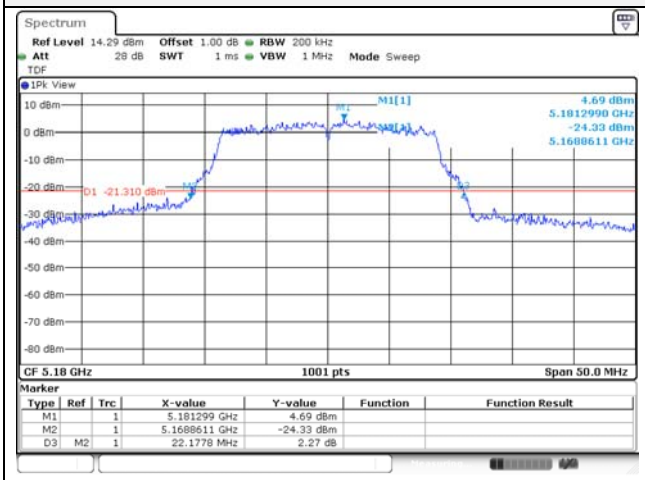

UNII-2A / 802.11n HT20 / Low ch.

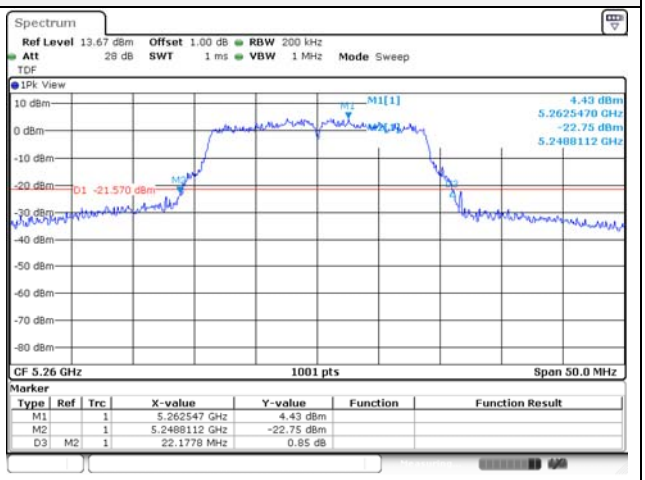

UNII-1 / 802.11n HT20 / Mid ch.

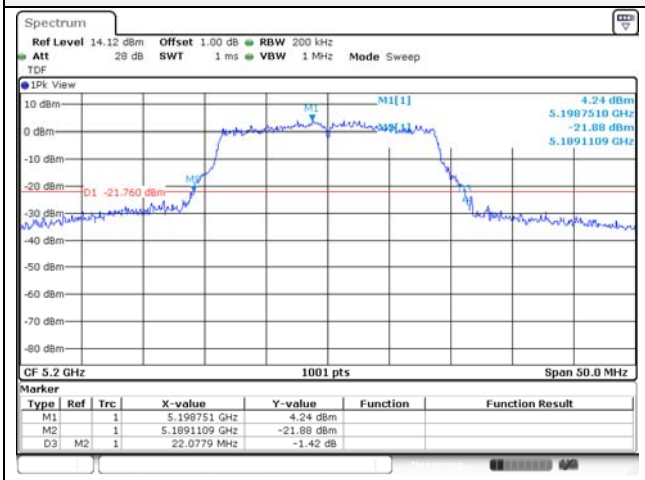

UNII-2A / 802.11n HT20 / Mid ch.

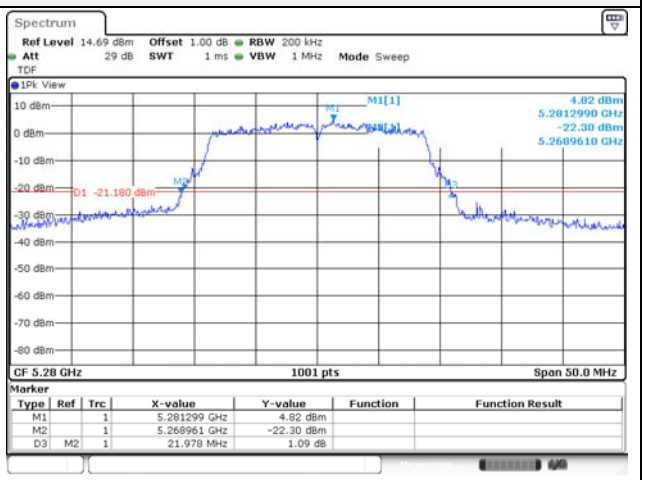

UNII-1 / 802.11n HT20 / High ch.

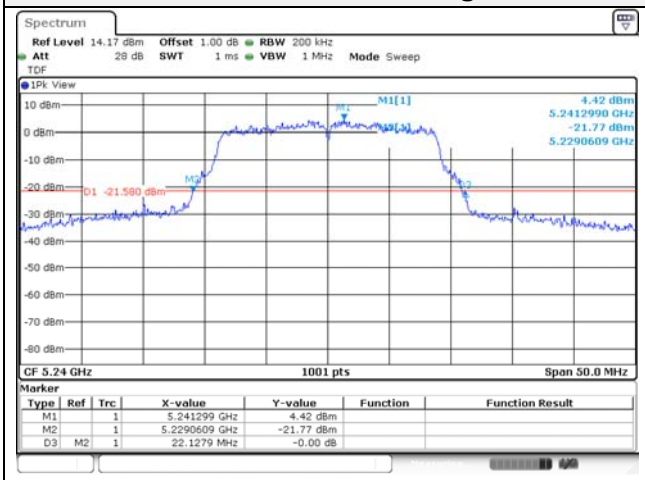

UNII-2A / 802.11n HT20 / High ch.

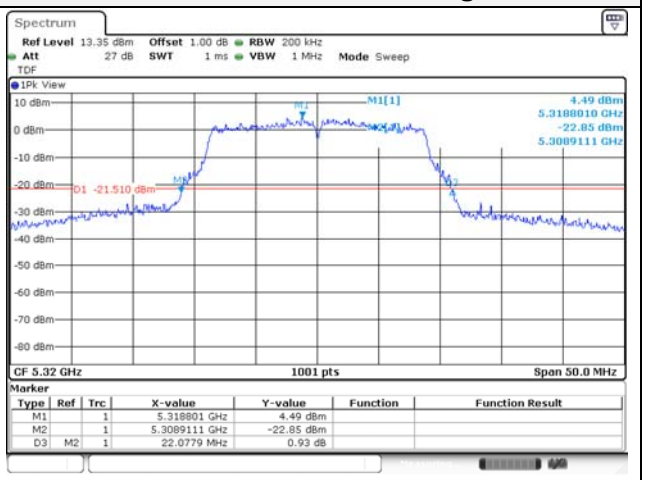

UNII-2C / 802.11n HT20 / Low ch.

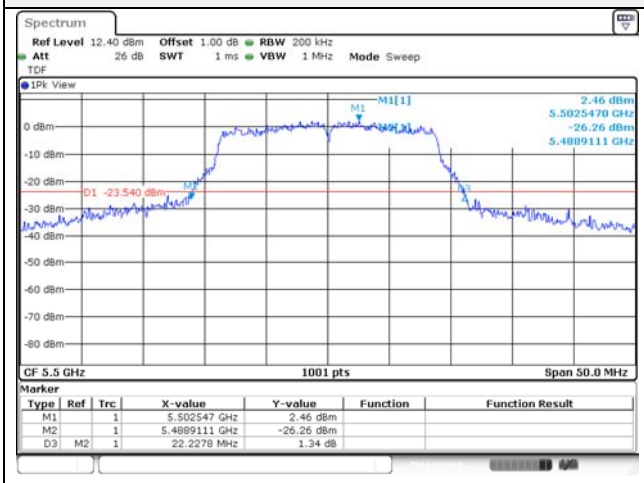

UNII-2C / 802.11n HT20 / Mid ch.

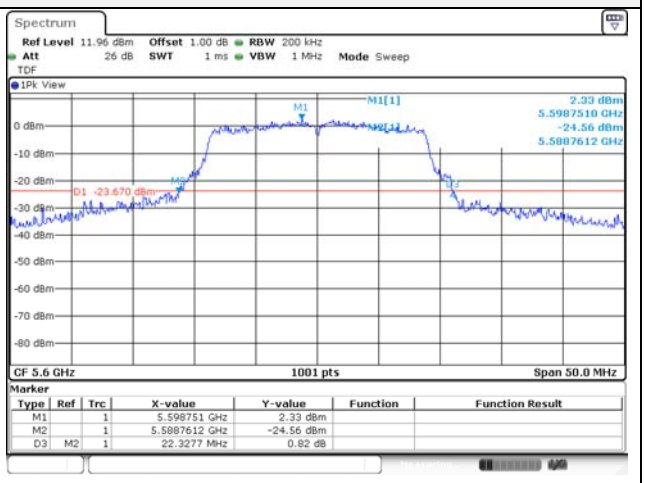

UNII-2C / 802.11n HT20 / High ch.

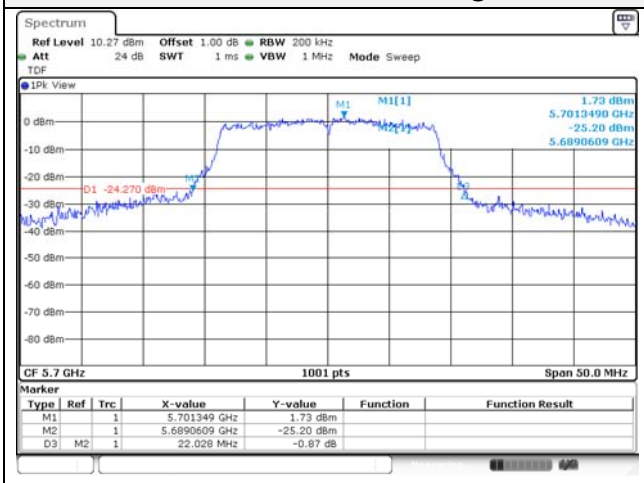

Blank

99% Bandwidth

In order to simplify the report, only 802.11n mode test plots are attached.

UNII-1 / 802.11n HT20 / Low ch.

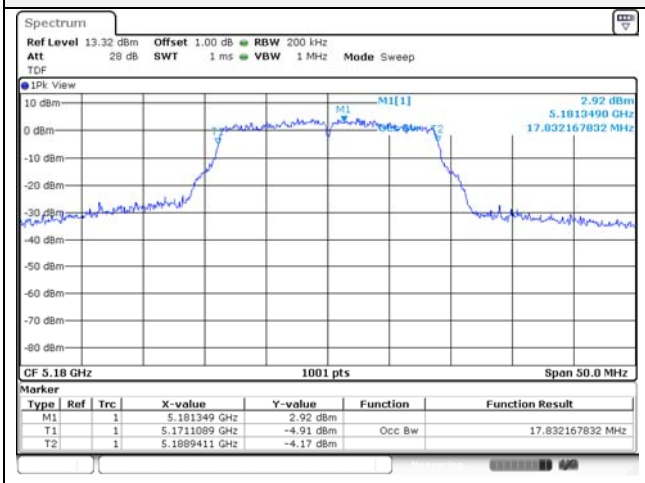

UNII-2A / 802.11n HT20 / Low ch.

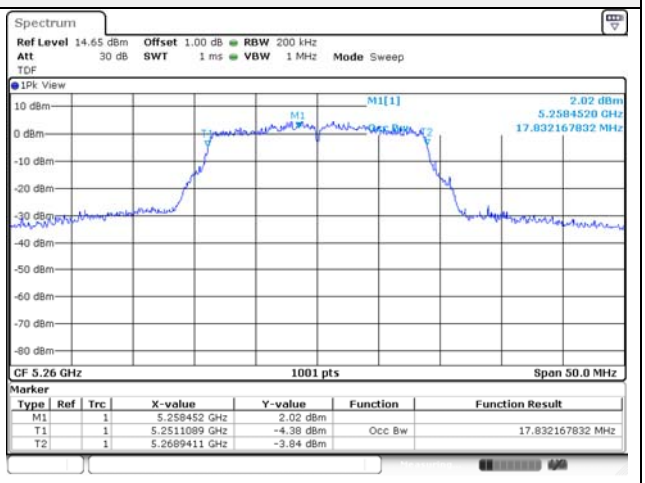

UNII-1 / 802.11n HT20 / Mid ch.

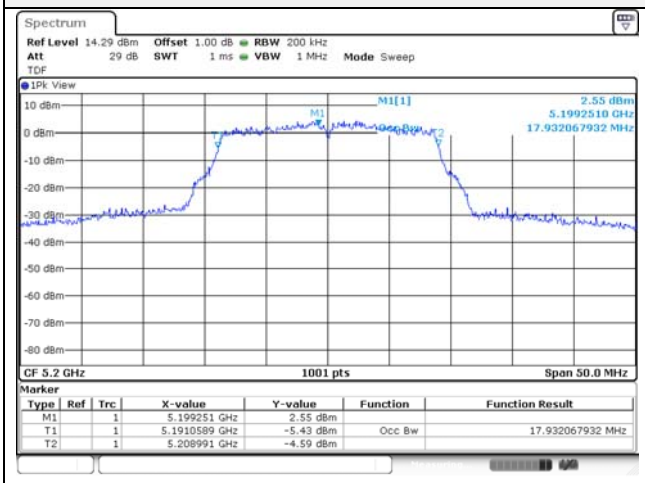

UNII-2A / 802.11n HT20 / Mid ch.

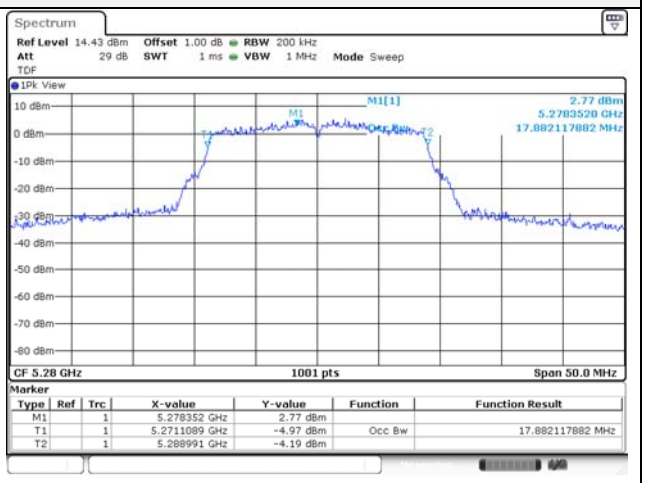

UNII-1 / 802.11n HT20 / High ch.

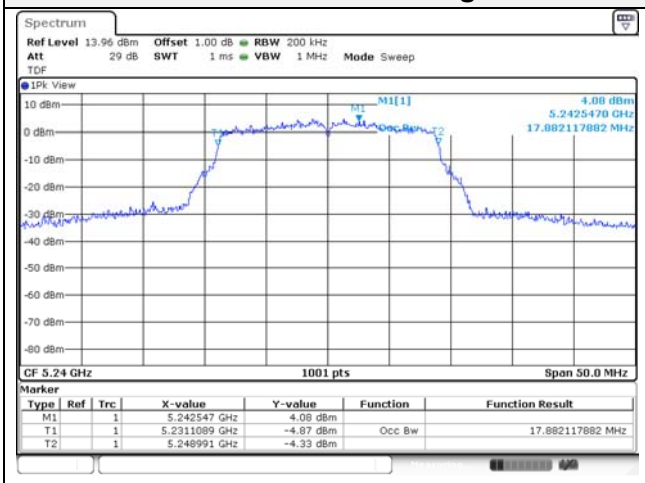

UNII-2A / 802.11n HT20 / High ch.

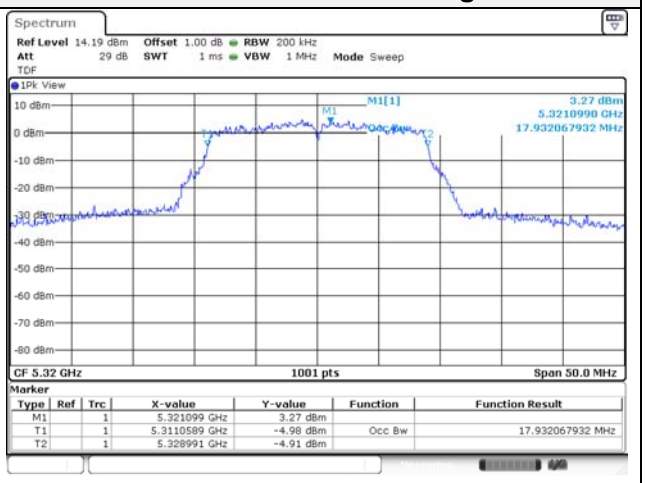

UNII-2C / 802.11n HT20 / Low ch.

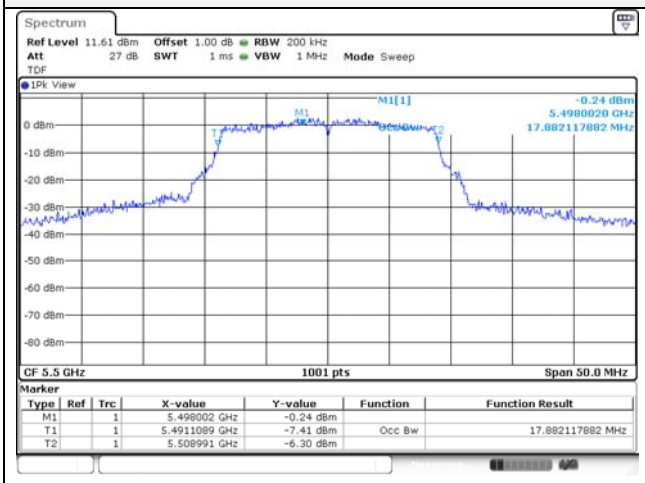

UNII-2C / 802.11n HT20 / Mid ch.

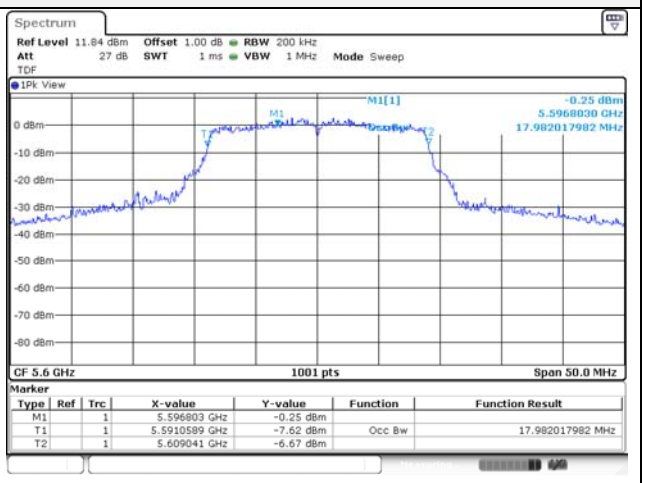

UNII-2C / 802.11n HT20 / High ch.

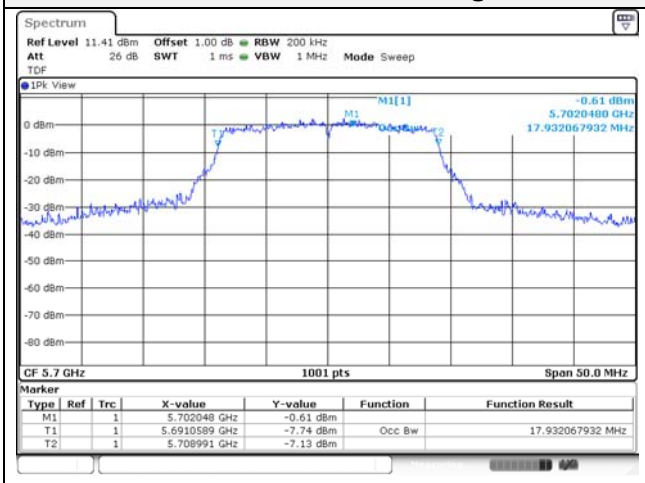

Blank

7.4. 6 dB Bandwidth

Test setup



Limit

According to §15.407(e), RSS-247(6.2.4) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth if U-NII devices shall be at least 500kHz

Test procedure

ANSI C63.10-2013 Section 6.9.2
KDB 789033 D02 v02r01 - Section C.2

Test settings

Minimum Emission Bandwidth for the band 5.725−5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 kHz for the band 5.725−5.85 GHz. The following procedure shall be used for measuring this bandwidth:

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test results

Test mode	Band	Frequency (MHz)	6dB bandwidth (MHz)	Limit (MHz)	99% bandwidth (MHz)
802.11a	UNII-3	5 745	16.13	0.50	16.78
		5 785	16.08	0.50	16.68
		5 825	15.88	0.50	16.78
802.11n HT20	UNII-3	5 745	16.63	0.50	17.88
		5 785	15.98	0.50	17.88
		5 825	16.78	0.50	17.88

In order to simplify the report, only 802.11n mode test plots are attached.

6 dB bandwidth	99% bandwidth
UNII-3 / 802.11n HT 20 / Low ch.	**UNII-3 / 802.11n HT 20 / Low ch.**
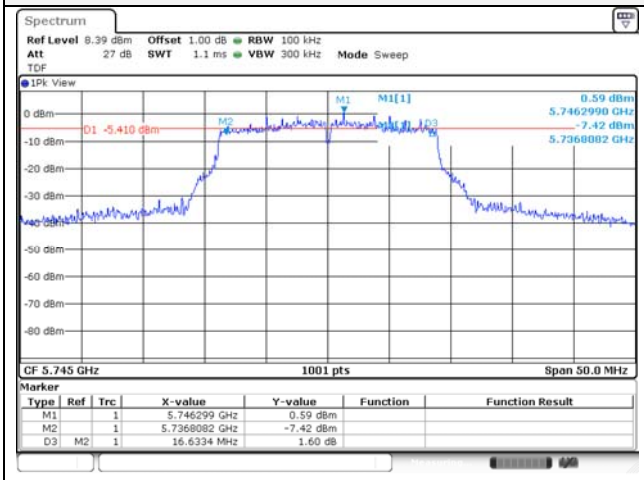	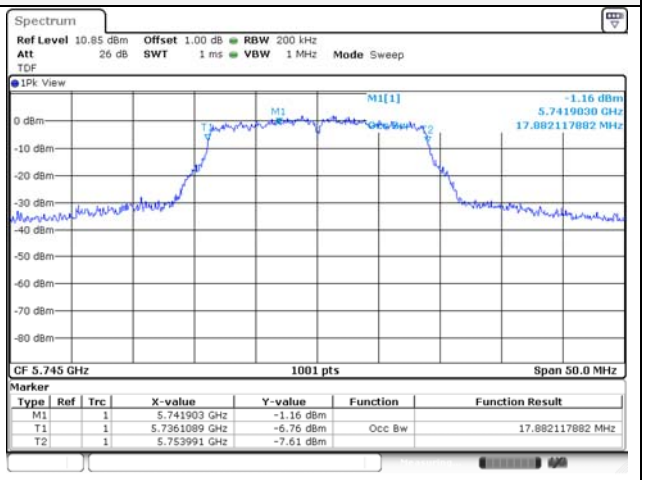
UNII-3 / 802.11n HT 20 / Mid ch.	**UNII-3 / 802.11n HT 20 / Mid ch.**
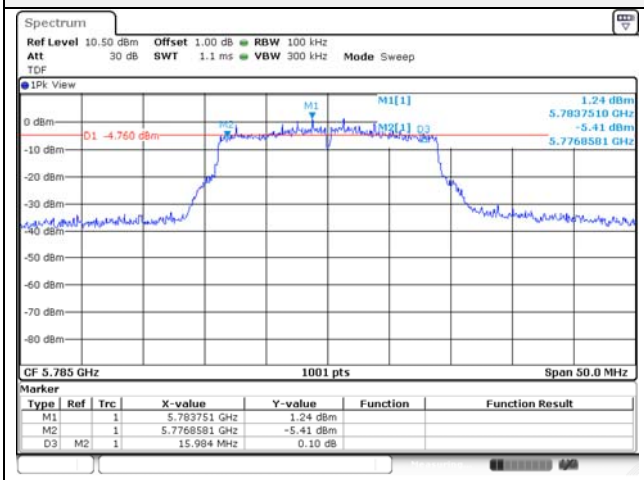	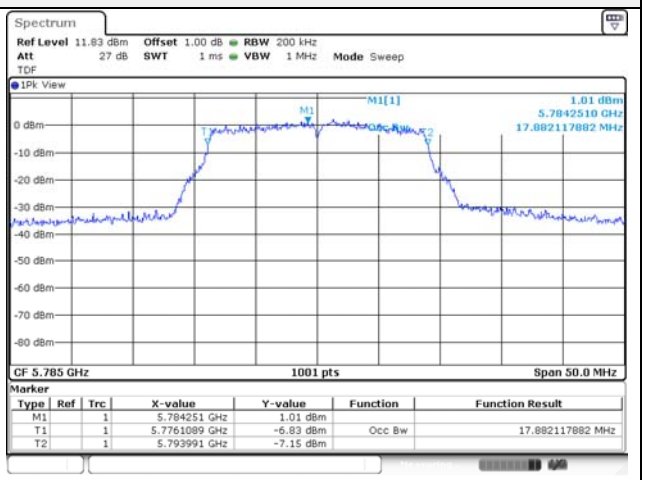
UNII-3 / 802.11n HT 20 / High ch.	**UNII-3 / 802.11n HT 20 / High ch.**
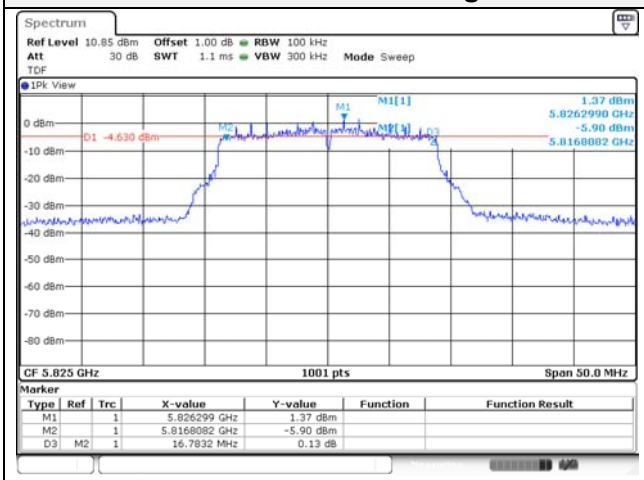	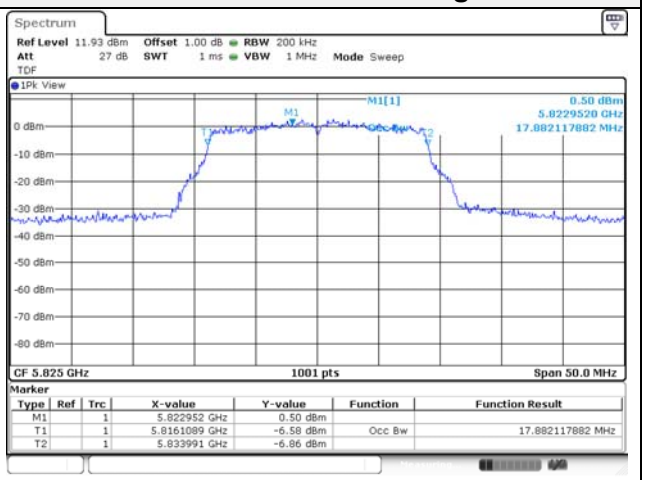

7.5. Straddle channel

26㏈ bandwidth & 99% Bandwidth

Test mode	Band	Frequency (㎒)	26㏈ Bandwidth (㎒)	99% Bandwidth (㎒)
802.11a	UNII-2C	5 720	15.94	13.37
802.11n HT20			15.99	13.92
802.11a	UNII-3	5 720	5.89	3.39
802.11n HT20			6.09	3.99

Notes:

1. For 26㏈ Bandwidth
   - [UNII-2C] 26㏈ Bandwidth = 5 725 ㎒ – Measured Frequency[㎒]
   - [UNII-3] 26㏈ Bandwidth = Measured Frequency[㎒] – 5 725 ㎒
2. For 99% Bandwidth
   - For UNII band 2C = (99% BW / 2) + 5 ㎒ because center frequency is set to 5720 ㎒
   - And for UNII band 3 = Measured frequency(T2) – 5725 ㎒

26 ㏈ bandwidth	99% bandwidth
802.11a	**802.11a**
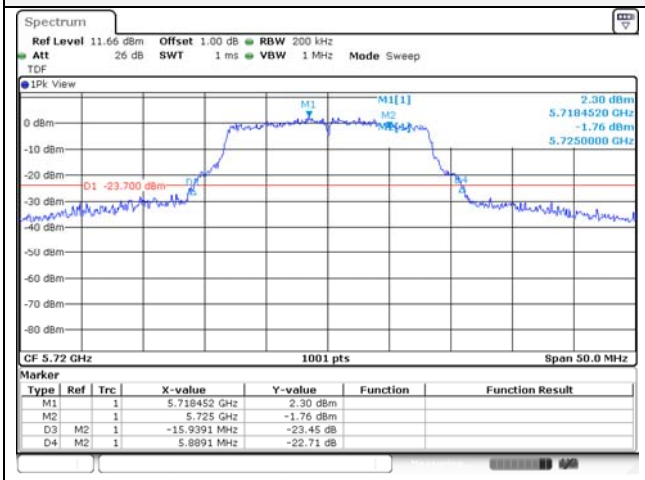	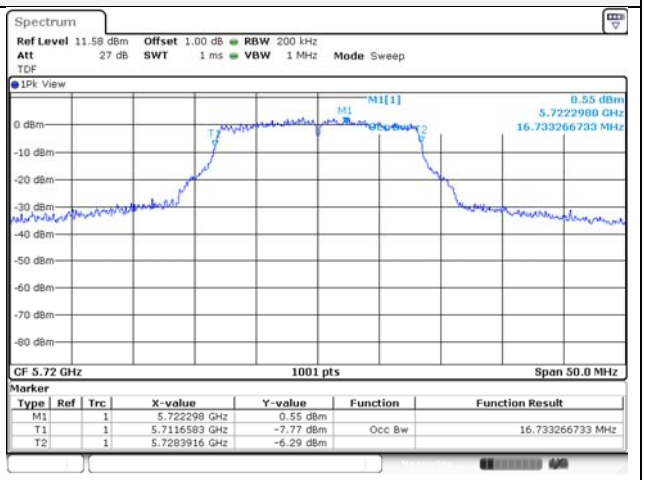
802.11n HT20	**802.11n HT20**
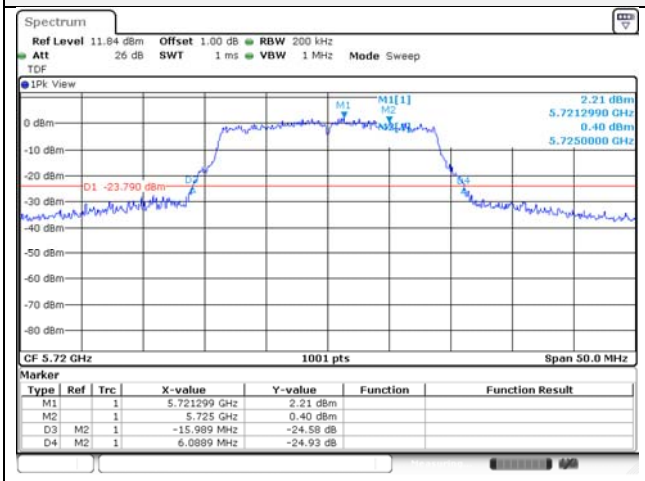	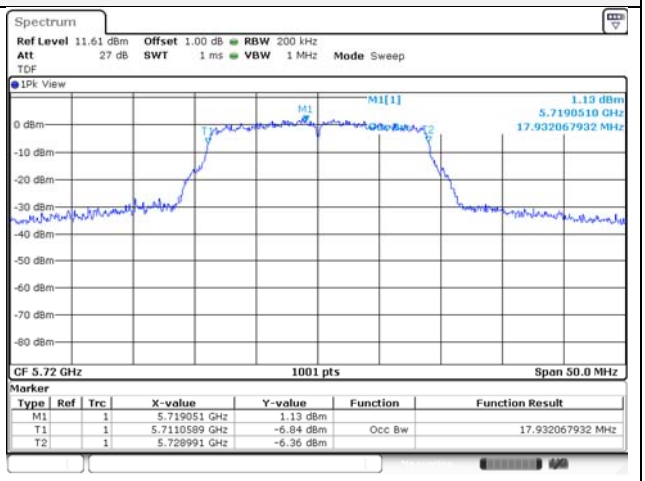

6dB bandwidth

Test mode	Band	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
802.11a	UNII-3	5 720	3.24	0.50
802.11n HT20			3.59	0.50

Notes:

1. 6dB Bandwidth = Measured Frequency[MHz] – 5 725MHz

802.11a

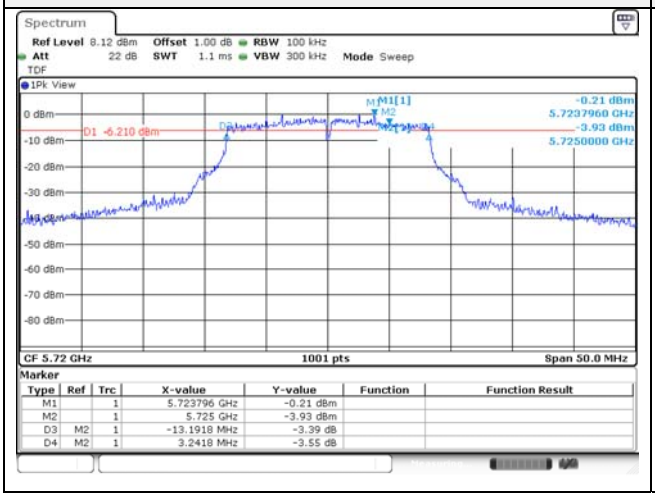

802.11n HT20

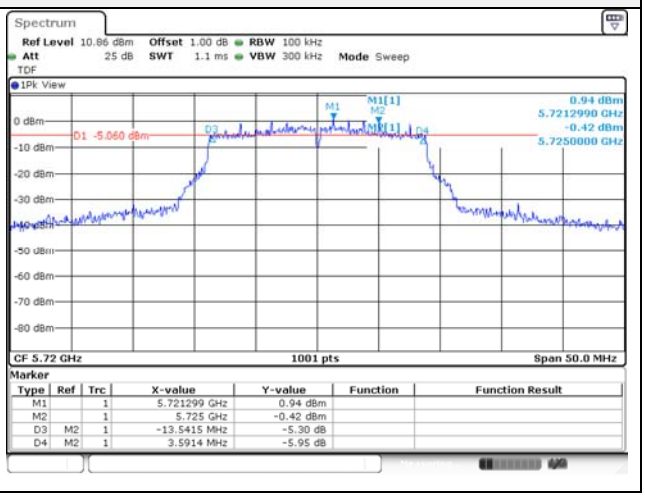

Output Power

Test mode	Band	Frequency (MHz)	Measured output power				
			Conducted output power (dBm)	Limit (dBm)	ANT Gain (dBi)	Max.e.i.r.p (dBm)	Max e.i.r.p Limit (dBm)
802.11a	UNII-2C	5 720	11.23	23.02	-8.10	3.13	28.25
802.11n HT20			11.12	23.04	-8.10	3.02	28.44
802.11a	UNII-3	5 720	4.37	30.00	-7.60	-3.23	30.00
802.11n HT20			4.56	30.00	-7.60	-3.04	30.00

Notes:

1. Conducted output power(Average) = reading value of average power + D.C.F
2. e.i.r.p. Calculation: e.i.r.p. (dBm) = Conducted output power (dBm) + Antenna gain (dBi)

802.11a

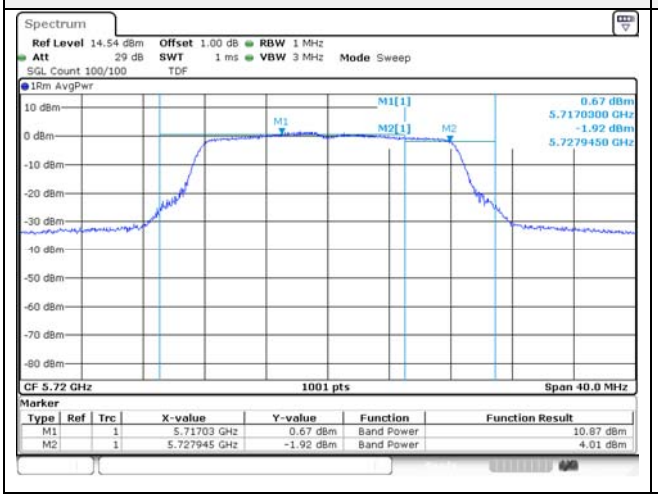

802.11n HT20

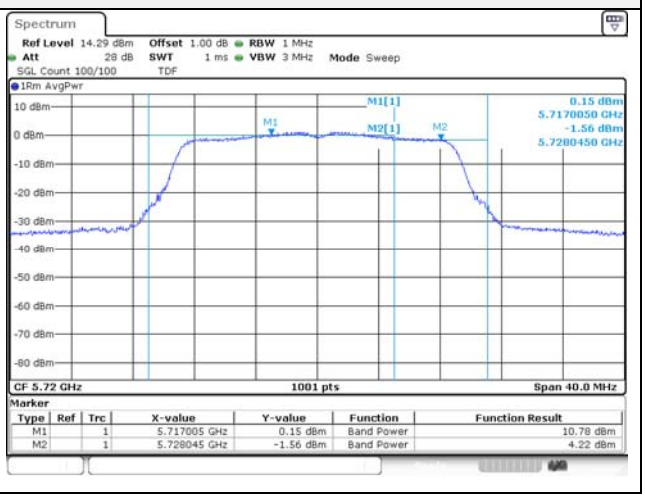

Power Spectral Density

Test mode	Band	Frequency (MHz)	Measured PSD (dBm/MHz)	DCF (dB)	Maximum PSD (dB m/MHz)	Limit (dBm/MHz)
802.11a	UNII-2C	5 720	1.54	0.36	1.90	11.00
802.11n HT20			1.39	0.34	1.73	

Test mode	Band	Frequency (MHz)	Measured PSD (dBm/ 500 kHz)	DCF (dB)	Maximum PSD (dBm/ 500 kHz)	Limit (dBm /500 kHz)
802.11a	UNII-3	5 720	-3.20	0.36	-2.84	30.00
802.11n HT20			-3.43	0.34	-3.09	

Notes:

1. Maximum PSD calculation

- Maximum PSD = Measured PSD + D.C.F

UNII-2C / 802.11a

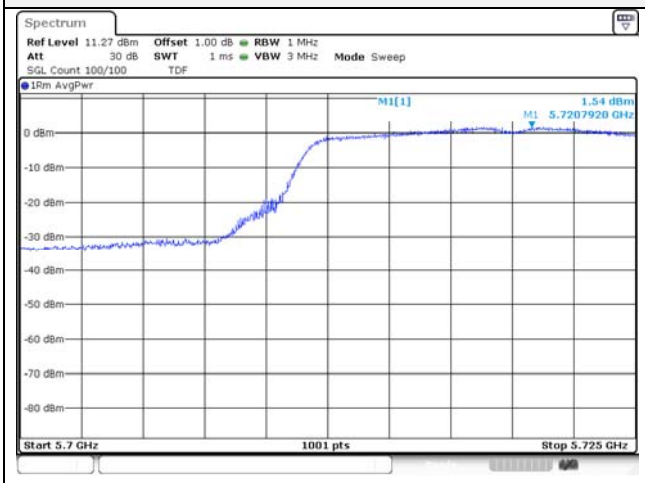

UNII-3 / 802.11a

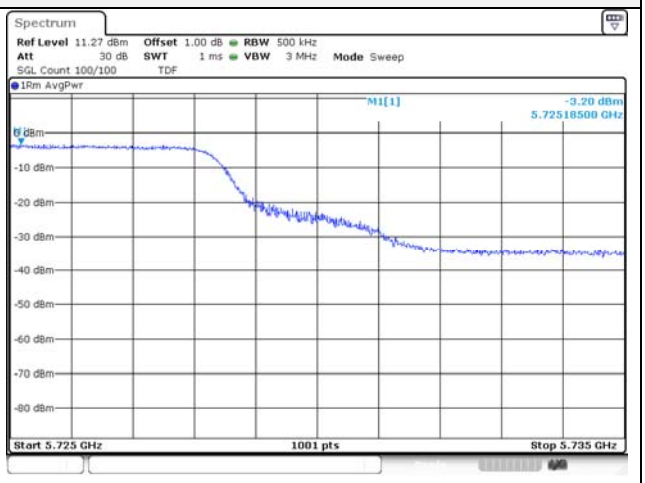

UNII-2C / 802.11n HT20

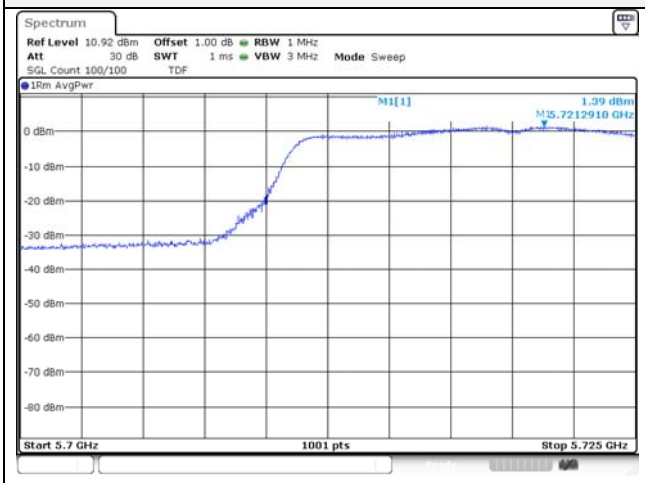

UNII-3 / 802.11n HT20

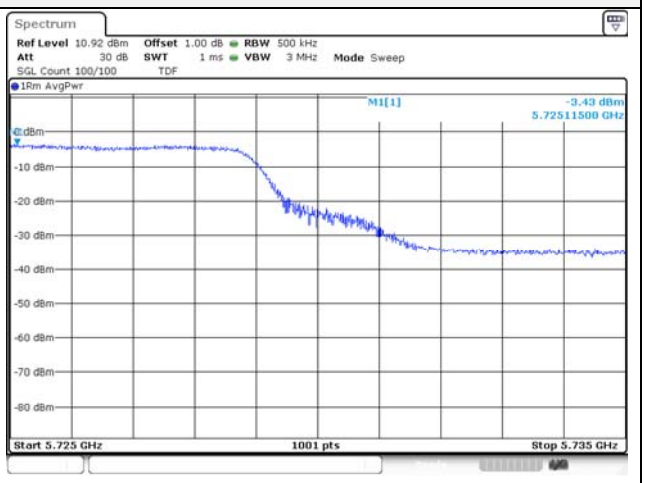

7.6. Spurious Emission, Band Edge and Restricted bands

Test setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 9 ㎑ to 30 ㎒ Emissions

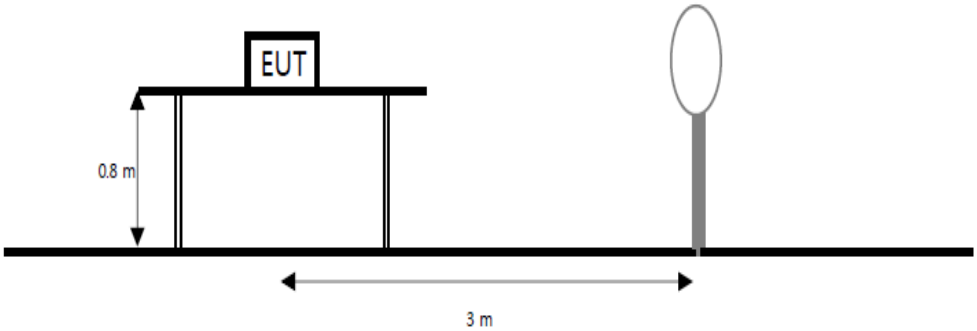

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 ㎒ to 1 ㎓ emissions.

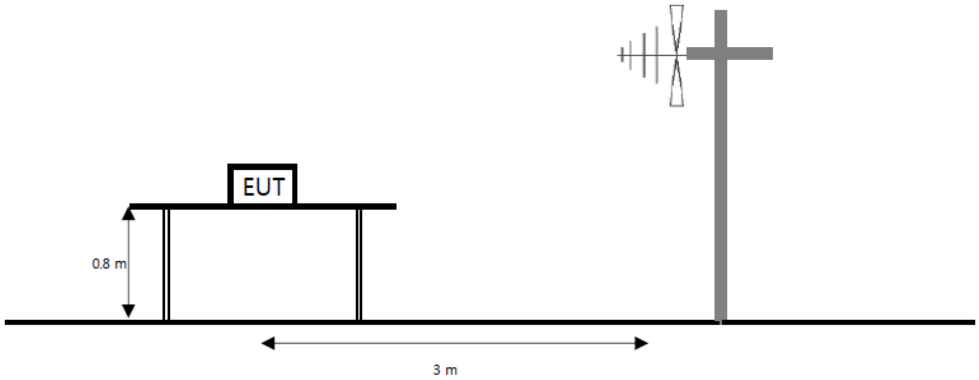

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 ㎓ to the tenth harmonic of the highest fundamental frequency or to 40 ㎓ emissions, whichever is lower.

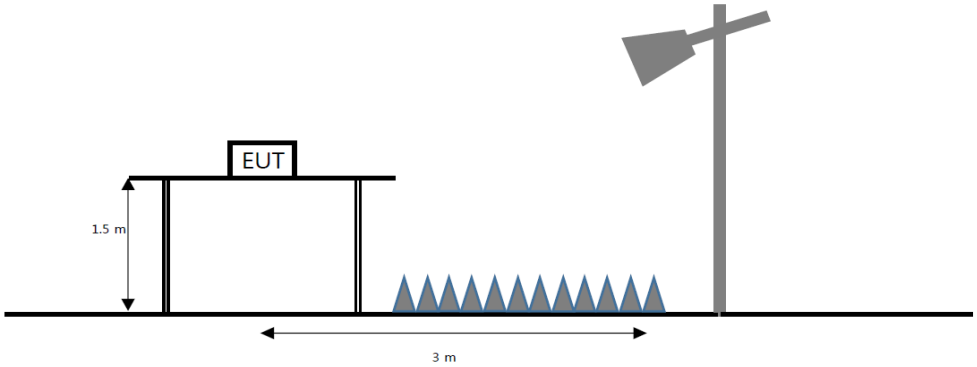

Limit

FCC

According to section 15.209(a) except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (㎒)	Field strength (㎛/m)	Measurement distance (m)
0.009 - 0.490	2 400/F(㎑)	300
0.490 - 1.705	24 000/F(㎑)	30
1.705 - 30	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 ㎒, 76–88 ㎒, 174–216 ㎒ or 470–806 ㎒. However, operation within these frequency bands is permitted under other sections of this part, e.g., Section15.231 and 15.241.

According to section 15.205(a) and (b) only spurious emissions are permitted in any of the frequency bands listed below:

㎒	㎒	㎒	㎓
0.009 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.694 75 - 16.695 25	608 - 614	5.35 - 5.46
2.173 5 - 2.190 5	16.804 25 - 16.804 75	960 – 1 240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1 300 – 1 427	8.025 - 8.5
4.177 25 - 4.177 75	37.5 - 38.25	1 435 – 1 626.5	9.0 - 9.2
4.207 25 - 4.207 75	73 - 74.6	1 645.5 – 1 646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1 660 – 1 710	10.6 - 12.7
6.267 75 - 6.268 25	108 - 121.94	1 718.8 – 1 722.2	13.25 - 13.4
6.311 75 - 6.312 25	123 - 138	2 200 – 2 300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2 310 – 2 390	15.35 - 16.2
8.362 - 8.366	156.524 75 - 156.525 25	2 483.5 – 2 500	17.7 - 21.4
8.376 25 - 8.386 75		2 690 – 2 900	22.01 - 23.12
8.414 25 - 8.414 75	156.7 - 156.9	3 260 – 3 267	23.6 - 24.0
12.29 - 12.293	162.012 5 - 167.17	3 332 – 3 339	31.2 - 31.8
12.519 75 - 12.520 25	167.72 - 173.2	3 345.8 – 3 358	36.43 - 36.5
12.576 75 - 12.577 25	240 - 285	3 600 – 4 400	Above 38.6
13.36 - 13.41	322 - 335.4		

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in section 15.209. At frequencies equal to or less than 1 000 ㎒, compliance with the limits in section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1 000 ㎒, compliance with the emission limits in section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in section 15.35 apply to these measurements.

According to section 15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

For transmitters operating in the 5.15-5.25 ㎓ band: All emissions outside of the 5.15-5.35 ㎓ band shall not exceed an e.i.r.p. of −27 ㏈m/㎒
For transmitters operating in the 5.25-5.35 ㎓ band: All emissions outside of the 5.15-5.35 ㎓ band shall not exceed an e.i.r.p. of −27 ㏈m/㎒.

For transmitters operating in the 5.725-5.85 ㎓ band: All emissions shall be limited to a level of -27 ㏈m/㎒ at 75 ㎒ or more above or below the band edge increasing linearly to 10 ㏈m/㎒ at 25 ㎒ above or below the band edge, and form 25 ㎒ above or below the band edge increasing linearly to a level of 15.6 ㏈m/㎒ at 5 ㎒ above or below the band edge, and from 5 ㎒ above or below the band edge increasing linearly to a level of 27 ㏈m/㎒ at the band edge.

IC

According to RSS-247(5.5), In any 100 ㎑ bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 ㏈ below that in the 100 ㎑ bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 ㏈ instead of 20 ㏈. Attenuation below the general field strength limits specified in RSS-Gen is not required.

According to RSS-Gen(8.9), Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission.

Table 5- General field strength limits at frequencies above 30 ㎒

Frequency(㎒)	Field strength (㎶/m at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

Table 6- General field strength limits at frequencies below 30 ㎒

Frequency	Magnetic field strength (H-Field) (㎂/m)	Measurement distance(m)
9 – 490 ㎑ 1)	6.37/F (F in ㎑)	300
490 – 1705 ㎑	63.7/F (F in ㎑)	30
1.705 - 30 ㎒	0.08	30

According to RSS-Gen(8.10), Restricted frequency bands, identified in table 7, are designated primarily for safety-of-life services (distress calling and certain aeronautical activities), certain satellite downlinks, radio astronomy and some government uses. Except where otherwise indicated, the following conditions related to the restricted frequency bands apply:

(a) The transmit frequency, including fundamental components of modulation, of licence-exempt radio apparatus shall not fall within the restricted frequency bands listed in table 7 except for apparatus compliant with RSS-287, Emergency Position Indicating Radio Beacons (EPIRB), Emergency Locator Transmitters (ELT), Personal Locator Beacons (PLB), and Maritime Survivor Locator Devices (MSLD).
(b) Unwanted emissions that fall into restricted frequency bands listed in table 7 shall comply with the limits specified in table 5 and table 6.
(c) Unwanted emissions that do not fall within the restricted frequency bands listed in table 7 shall comply either with the limits specified in the applicable RSS or with those specified in table 5 and table 6.

Table 7- Restricted frequency bands*

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138	--	

* Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

Test procedure
ANSI C63.10-2013 Section 12.7.7.2, 12.7.5, 12.7.6
KDB 789033 D02 v02r01 – Section G

Test settings
Peak field strength measurements
1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in table
3. VBW ≥ (3×RBW)
4. Detector = peak
5. Sweep time = auto
6. Trace mode = max hold
7. Allow sweeps to continue until the trace stabilizes

Table. RBW as a function of frequency

Frequency	RBW
9 ㎑ to 150 ㎑	200 ㎐ to 300 ㎐
0.15 ㎒ to 30 ㎒	9 ㎑ to 10 ㎑
30 ㎒ to 1 000 ㎒	100 ㎑ to 120 ㎑
> 1 000 ㎒	1 ㎒

Average field strength measurements

Trace averaging with continuous EUT transmission at full power

If the EUT can be configured or modified to transmit continuously (D ≥ 98%), then the average emission levels shall be measured using the following method (with EUT transmitting continuously):
1. RBW = 1 ㎒ (unless otherwise specified).
2. VBW ≥ (3×RBW).
3. Detector = RMS (power averaging), if [span / (# of points in sweep)] ≤ (RBW / 2). Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
4. Averaging type = power (i.e., rms):
   1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
   2) Some instruments require linear display mode to use linear voltage averaging. Log or ㏈ averaging shall not be used.
5. Sweep time = auto.
6. Perform a trace average of at least 100 traces.

Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT (D ≥ 98%) cannot be achieved and the duty cycle is constant (duty cycle variations are less than ±2%), then the following procedure shall be used:
1. The EUT shall be configured to operate at the maximum achievable duty cycle.
2. Measure the duty cycle D of the transmitter output signal as described in 11.6.
3. RBW = 1 ㎒ (unless otherwise specified).
4. VBW ≥ [3 × RBW].
5. Detector = RMS (power averaging), if [span / (# of points in sweep)] ≤ (RBW / 2). Satisfying this condition may require increasing the number of points in the sweep or reducing the span.
   If this condition cannot be satisfied, then the detector mode shall be set to peak.

6. Averaging type = power (i.e., rms):
   1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
   2) Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.
7. Sweep time = auto.
8. Perform a trace average of at least 100 traces.
9. A correction factor shall be added to the measurement results prior to comparing with the emission limit to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
   1) If power averaging (rms) mode was used in step f), then the applicable correction factor is [10 log (1 / D)], where D is the duty cycle.
   2) If linear voltage averaging mode was used in step f), then the applicable correction factor is [20 log (1 / D)], where D is the duty cycle.
   3) If a specific emission is demonstrated to be continuous (D ≥ 98%) rather than turning ON and OFF with with the transmit cycle, then no duty cycle correction is required for that emission.

Notes:

1. *f* <30 MHz, extrapolation factor of 40 dB/decade of distance. $F_d = 40\log(D_m/D_s)$
   f ≥30 MHz, extrapolation factor of 20 dB/decade of distance. $F_d = 20\log(D_m/D_s)$
   Where:
   F_d= Distance factor in dB
   D_m= Measurement distance in meters
   D_s= Specification distance in meters
2. Factors(dB) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB) + or F_d(dB)
3. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
4. Average test would be performed if the peak result were greater than the average limit.
5. 1) means restricted band.
6. According to part 15.31(f)(2), an extrapolation factor of 40 dB/decade is applied because measured distance of radiated emission is 3m
7. Below 30 MHz frequency range, In order to search for the worst result, all orientations about parallel, perpendicular, and ground-parallel were investigated then reported. when the emission level was higher than 20 dB of the limit, then the following statement shall be made: "No spurious emissions were detected within 20 dB of the limit."
8. For above 1 GHz pre-scan to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.
9. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω. For example, the measurement frequency X kHz resulted in a level of Y dBμV/m, which is equivalent to Y - 51.5 = Z dBμA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Test results (Below 30 ㎒) – Worst case: 802.11a / UNII-1 5 180 ㎒

Frequency	Pol.	Reading	Ant. Factor	Amp. +Cable	Distance Factor	DCF	Result	Limit	Margin
[MHz]	[V/H]	[dB(μV)]	[dB]	[dB]	[dB]	[dB]	[dB(μV/m)]	[dB(μV/m)]	[dB]
No spurious emissions were detected within 20 dB of the limit.									

Horizontal/Vertical

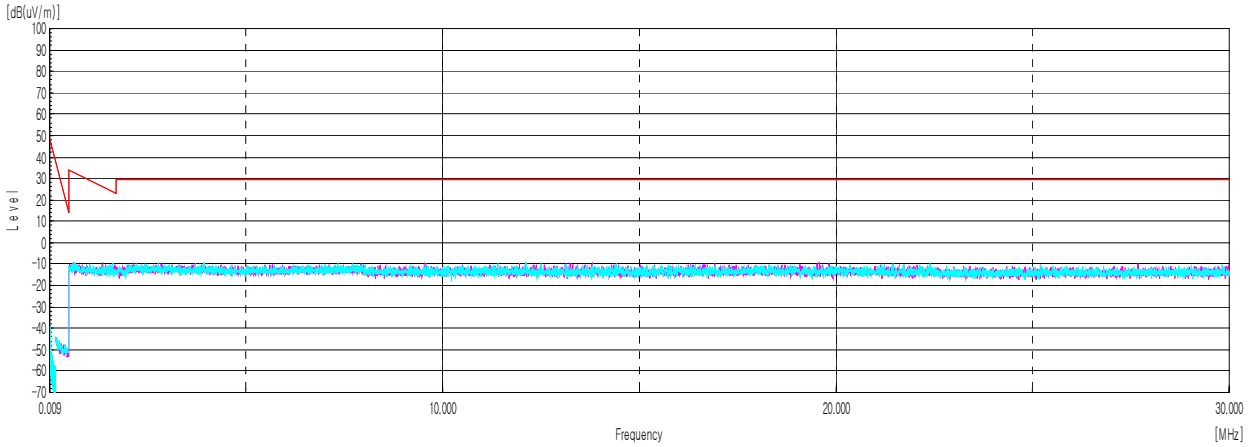

Test results (Below 1 000 ㎒) – Worst case: 802.11a / UNII-1 5 180 ㎒

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Quasi peak data								
44.67	V	26.90	18.27	-30.12	-	15.05	40.00	24.95
50.49	V	27.30	18.40	-29.96	-	15.74	40.00	24.26
145.43	V	27.50	19.04	-28.43	-	18.11	43.50	25.39
170.29[1)]	V	27.60	18.27	-28.10	-	17.77	43.50	25.73
194.66	V	31.30	15.63	-27.73	-	19.20	43.50	24.30
198.78	V	31.10	15.50	-27.71	-	18.89	43.50	24.61

Horizontal/Vertical

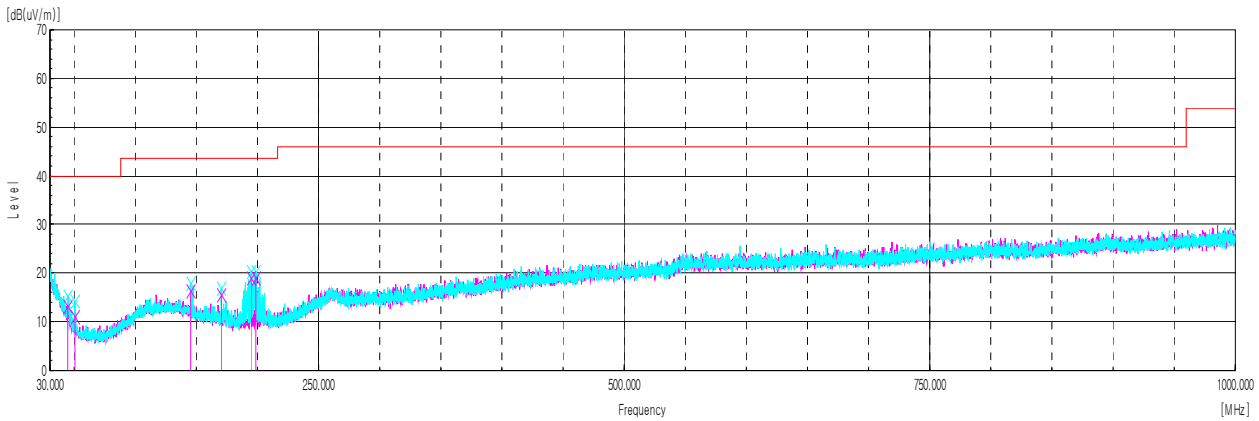

Test results (Above 1 000 ㎒)

802.11a_UNII-1

Lowest Channel (5 180 ㎒)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
5 147.17[1)]	H	41.51	34.16	-26.30	-	49.37	74.00	24.63
10 384.13	H	60.22	37.58	-49.99	-	47.81	68.20	20.39
15 535.05[1)]	H	56.25	39.99	-46.15	-	50.09	74.00	23.91
Average Data								
No spurious emissions were detected within 20 ㏈ of the limit								

Middle Channel (5 200 ㎒)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
10 398.14	H	61.59	37.60	-50.00	-	49.19	68.20	19.01
15 583.56[1)]	H	56.97	39.97	-46.14	-	50.80	74.00	23.20
Average Data								
No spurious emissions were detected within 20 ㏈ of the limit								

Highest Channel (5 240 ㎒)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
10 482.23	V	59.72	37.68	-50.07	-	47.33	68.20	20.87
15 715.81[1)]	H	55.98	39.91	-46.11	-	49.78	74.00	24.22
Average Data								
No spurious emissions were detected within 20 ㏈ of the limit								

802.11a_UNII-1

Lowest Channel (5 180 ㎒)

Horizontal/Vertical for Band-edge
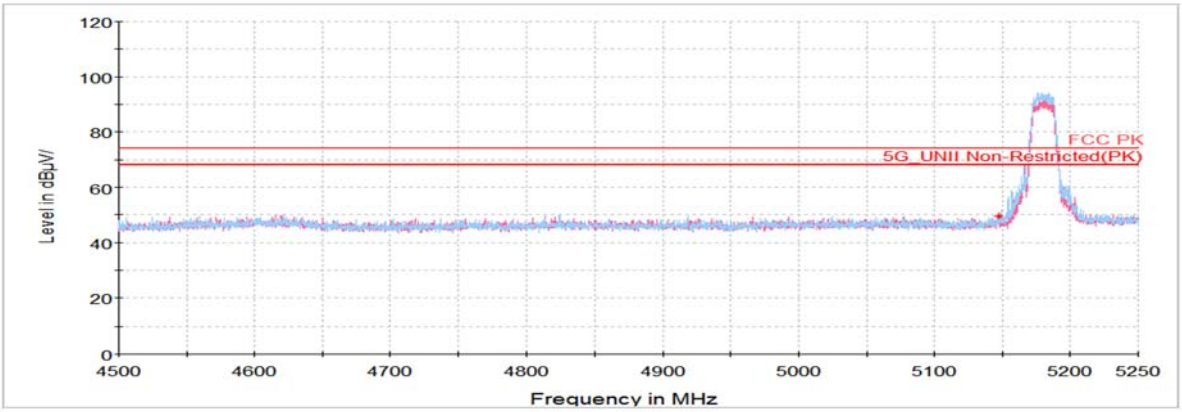

802.11n HT20 UNII-1

Lowest Channel (5 180 ㎒)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
5 149.31[1)]	H	46.50	34.17	-26.28	-	54.39	74.00	19.61
10 395.27	V	58.80	37.60	-50.00	-	46.40	68.20	21.80
15 461.02[1)]	H	55.49	40.11	-46.07	-	49.53	74.00	24.47
Average Data								
5 149.31[1)]	H	33.24	34.17	-26.28	0.34	41.47	54.00	12.53

Middle Channel (5 200 ㎒)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
10 398.86	H	60.15	37.60	-50.00	-	47.75	74.00	26.25
15 566.31[1)]	H	57.01	39.97	-46.14	-	50.84	74.00	23.16
Average Data								
No spurious emissions were detected within 20 ㏈ of the limit								

Highest Channel (5 240 ㎒)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
10 488.70	H	60.26	37.69	-50.08	-	47.87	68.20	20.33
15 763.61[1)]	H	56.72	39.89	-46.10	-	50.51	74.00	23.49
Average Data								
No spurious emissions were detected within 20 ㏈ of the limit.								

802.11n HT20 UNII-1

Lowest Channel (5 180 ㎒)

Average data	
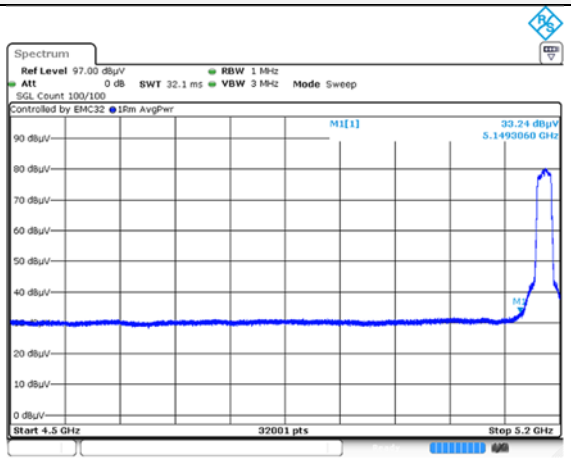	Blank
Horizontal/Vertical for Band-edge	
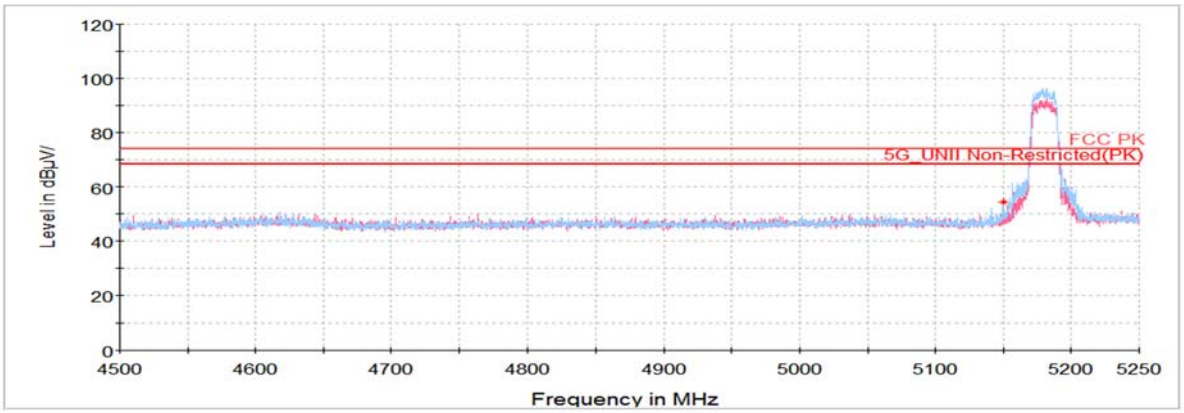	

Plot of Harmonics and Spurious Emissions

In order to simplify the report, attached plots were only the lowest margin condition

802.11n HT20_UNII-1_Lowest Channel (5 180 ㎒)

Horizontal/Vertical for 1 ㎓ ~ 6.5 ㎓

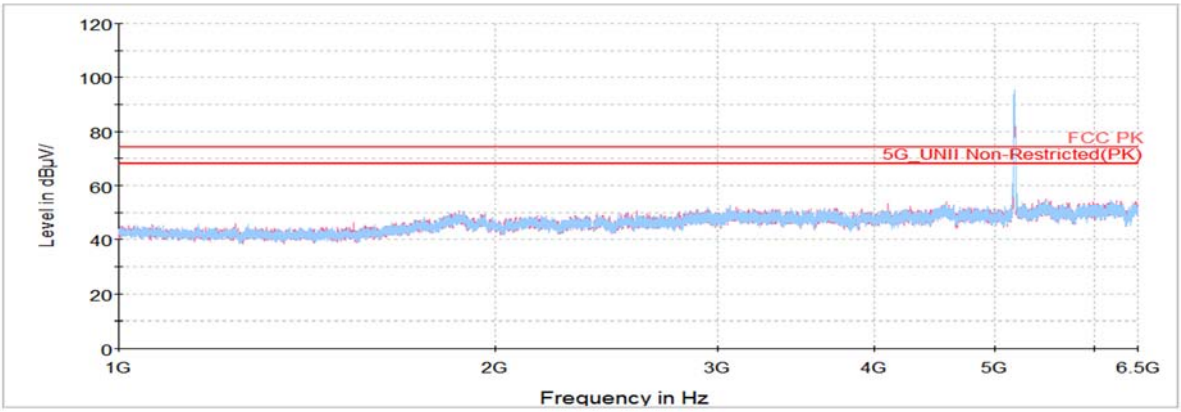

Horizontal/Vertical for 6.5 ㎓ ~ 18 ㎓

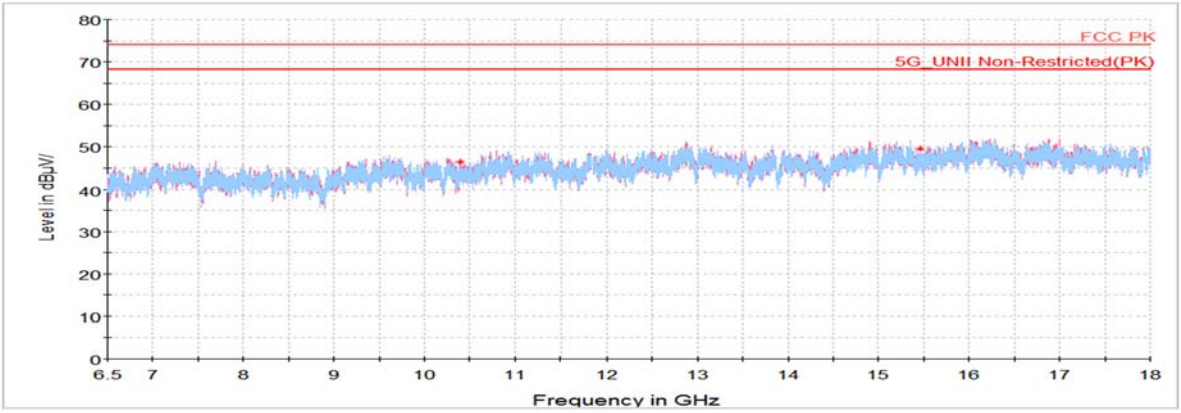

Horizontal/Vertical for 18 ㎓ ~ 40 ㎓

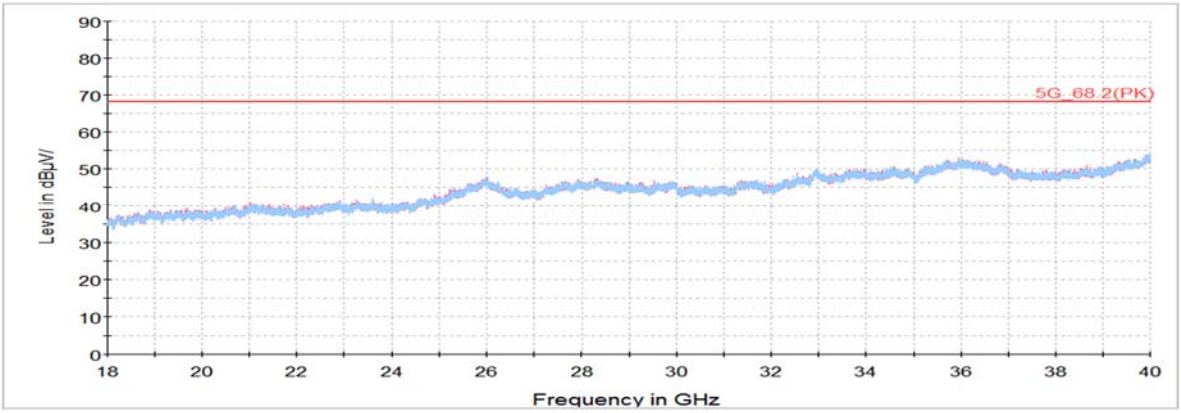

802.11a UNII-2A

Lowest Channel (5 260 ㎒)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
10 521.41	V	59.83	37.72	-50.03	-	47.52	68.20	20.68
15 769.72[1)]	H	56.80	39.89	-46.10	-	50.59	74.00	23.41
Average Data								
No spurious emissions were detected within 20 ㏈ of the limit.								

Middle Channel (5 280 ㎒)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
10 559.14	V	59.97	37.76	-49.92	-	47.81	68.20	20.39
15 805.30[1)]	H	56.98	39.88	-46.09	-	50.77	74.00	23.23
Average Data								
No spurious emissions were detected within 20 ㏈ of the limit.								

Highest Channel (5 320 ㎒)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
5 355.83[1)]	H	42.23	34.54	-26.06	-	50.71	74.00	23.29
10 639.64[1)]	H	62.37	37.84	-49.69	-	50.52	74.00	23.48
15 936.11[1)]	H	56.53	39.83	-46.06	-	50.30	74.00	23.70
Average Data								
No spurious emissions were detected within 20 ㏈ of the limit.								

802.11a UNII-2A

Highest Channel (5 320 ㎒)

Horizontal/Vertical for Band-edge

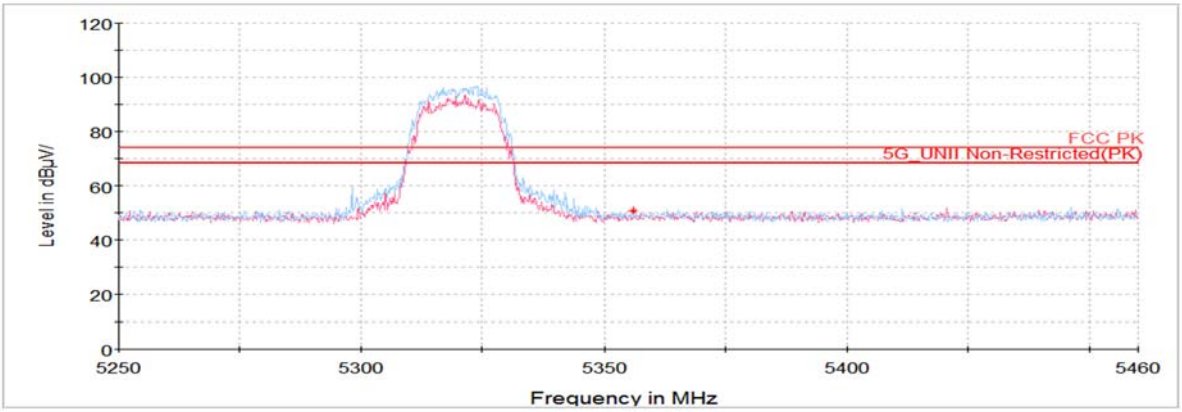

802.11n HT20_UNII-2A

Lowest Channel (5 260 ㎒)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
10 519.25	H	59.87	37.72	-50.03	-	47.56	68.20	20.64
15 769.36[1)]	H	56.48	39.89	-46.10	-	50.27	74.00	23.73
Average Data								
No spurious emissions were detected within 20 ㏈ of the limit.								

Middle Channel (5 280 ㎒)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
10 558.78	H	60.26	37.76	-49.92	-	48.10	74.00	25.90
15 840.52[1)]	V	56.22	39.86	-46.08	-	50.00	74.00	24.00
Average Data								
No spurious emissions were detected within 20 ㏈ of the limit.								

Highest Channel (5 320 ㎒)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
5 350.35[1)]	H	43.78	34.53	-26.11	-	52.20	74.00	21.80
10 644.67[1)]	V	60.42	37.84	-49.67	-	48.59	74.00	25.41
15 931.80[1)]	H	56.23	39.83	-46.06	-	50.00	74.00	24.00
Average Data								
5 350.35[1)]	H	34.02	34.53	-26.11	0.34	42.78	54.00	11.22

802.11n HT20_UNII-2A

Highest Channel (5 320 ㎒)

Average data	
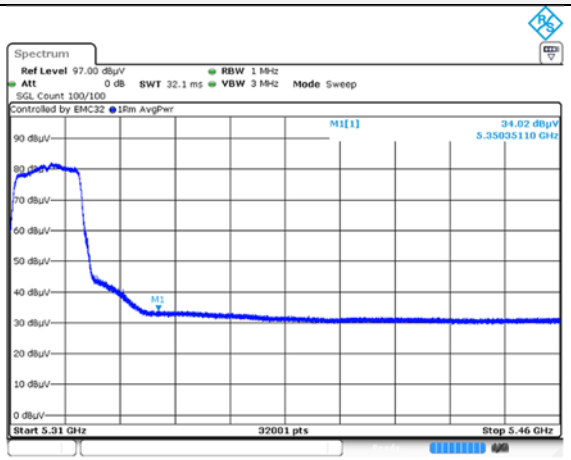	Blank
Horizontal/Vertical for Band-edge	
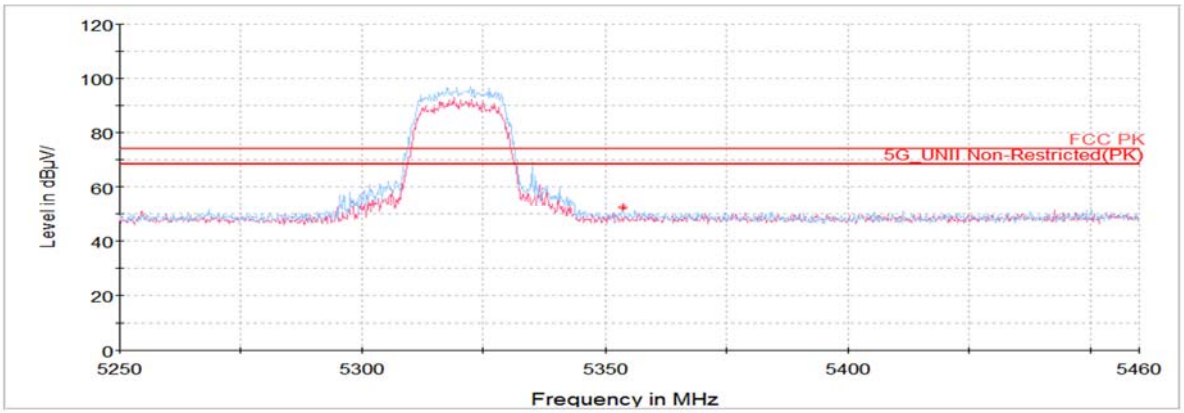	

Plot of Harmonics and Spurious Emissions

In order to simplify the report, attached plots were only the lowest margin condition

802.11n HT20_UNII-2A_Highest Channel (5 320 ㎒)

Horizontal/Vertical for 1 ㎓ ~ 6.5 ㎓

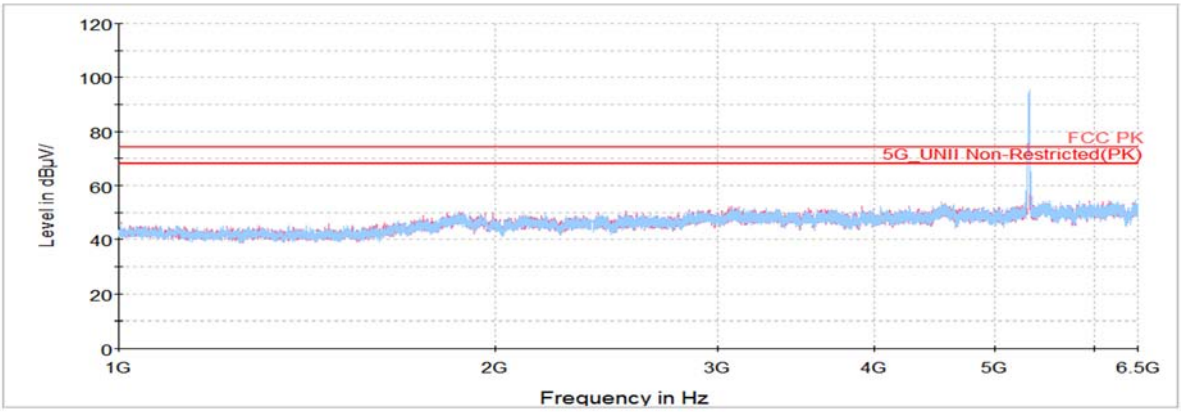

Horizontal/Vertical for 6.5 ㎓ ~ 18 ㎓

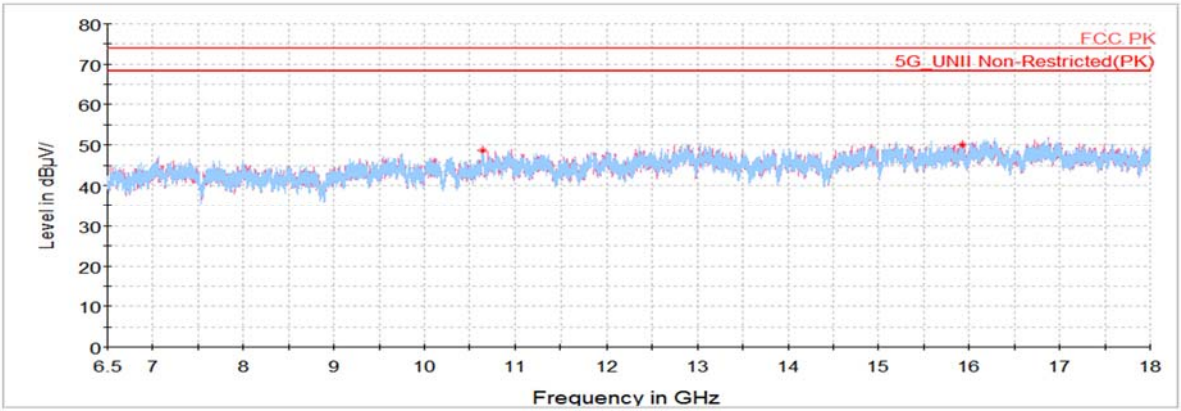

Horizontal/Vertical for 18 ㎓ ~ 40 ㎓

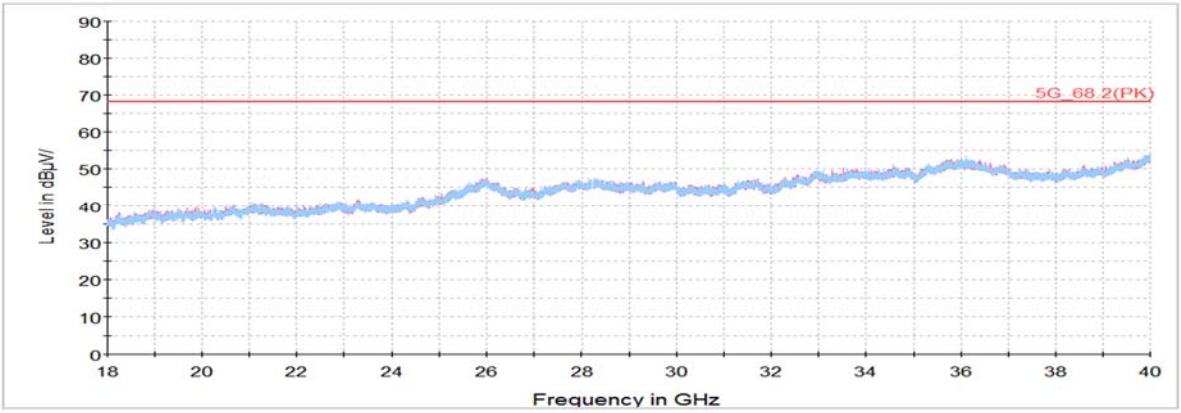

802.11a UNII-2C

Lowest Channel (5 500 ㎒)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
5 457.54[1)]	H	43.57	34.72	-25.11	-	53.18	74.00	20.82
10 996.50[1)]	V	58.10	38.20	-48.67	-	47.63	74.00	26.37
16 505.00	H	56.53	41.00	-47.89	-	49.64	68.20	18.56
Average Data								
5 457.54[1)]	H	33.06	34.72	-25.11	0.36	43.03	54.00	10.97

Middle Channel (5 600 ㎒)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
11 216.44[1)]	H	58.84	38.24	-49.43	-	47.65	74.00	26.35
16 820.17	V	57.61	41.26	-47.73	-	51.14	68.20	17.06
Average Data								
No spurious emissions were detected within 20 ㏈ of the limit.								

Highest Channel (5 700 ㎒)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
5 725.53	H	46.78	35.03	-26.42	-	55.39	68.20	12.81
11 402.59[1)]	H	58.38	38.28	-50.10	-	46.56	74.00	27.44
17 159.06	V	56.87	40.60	-47.74	-	49.73	68.20	18.47
Average Data								
No spurious emissions were detected within 20 ㏈ of the limit.								

802.11a UNII-2C

Lowest Channel (5 500 ㎒)

Average data	
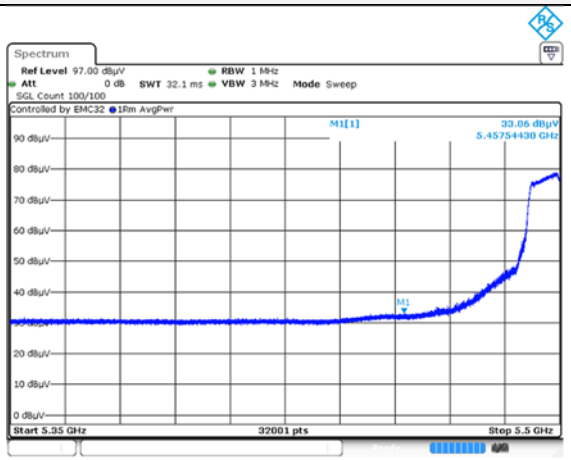	Blank

Horizontal/Vertical for Band-edge

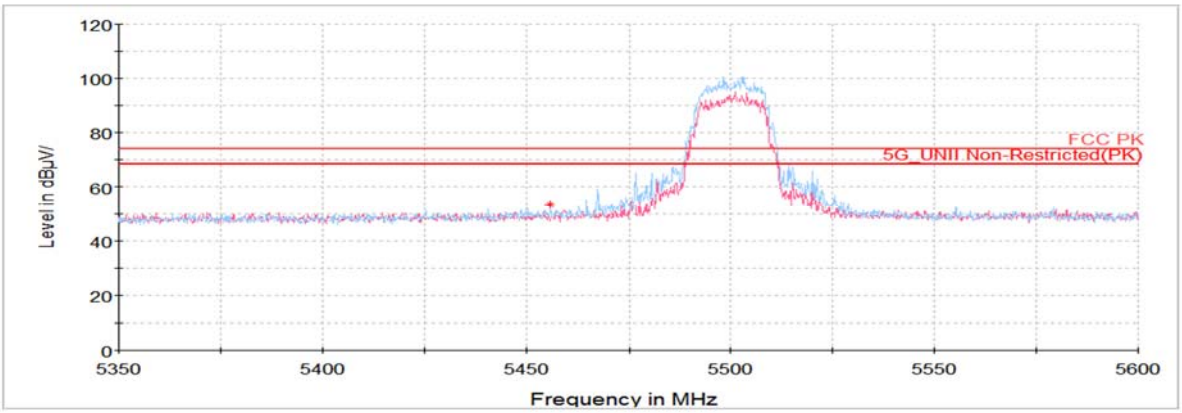

Highest Channel (5 700 ㎒)

Horizontal/Vertical for Band-edge

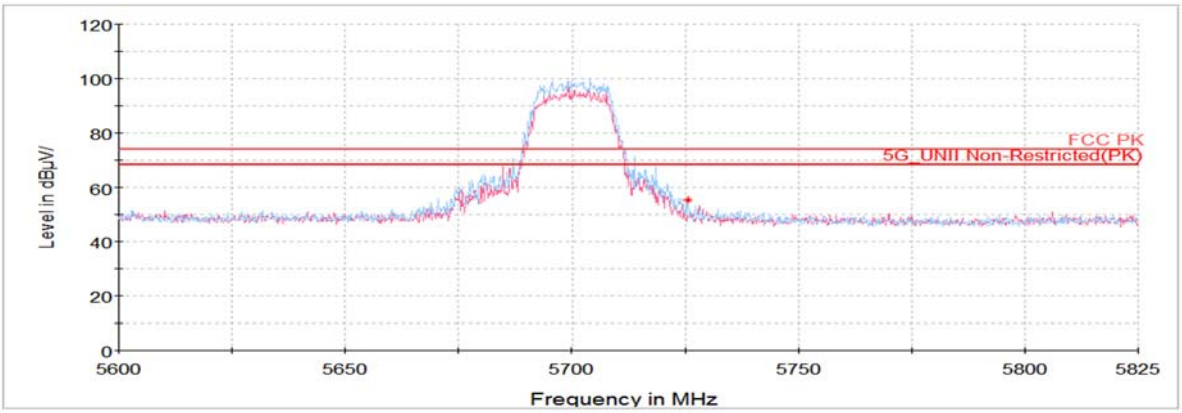

802.11n HT20_UNII-2C

Lowest Channel (5 500 ㎒)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
5 459.50[1)]	H	43.54	34.73	-25.09	-	53.18	74.00	20.82
10 960.20[1)]	H	59.85	38.16	-48.77	-	49.24	74.00	24.76
16 519.73	H	56.78	41.02	-47.88	-	49.92	68.20	18.28
Average Data								
5 459.50[1)]	H	36.90	34.73	-25.09	0.34	46.88	54.00	7.12

Middle Channel (5 600 ㎒)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
11 219.31[1)]	H	59.33	38.24	-49.44	-	48.13	74.00	25.87
16 299.80	H	56.03	40.96	-47.16	-	49.83	68.20	18.37
Average Data								
No spurious emissions were detected within 20 ㏈ of the limit.								

Highest Channel (5 700 ㎒)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
5 726.05	H	47.74	35.03	-26.42	-	56.35	68.20	11.85
11 400.08[1)]	H	58.75	38.28	-50.09	-	46.94	74.00	27.06
17 166.25	H	56.48	40.60	-47.74	-	49.34	68.20	18.86
Average Data								
No spurious emissions were detected within 20 ㏈ of the limit.								

802.11n HT20_UNII-2C

Lowest Channel (5 500 ㎒)

Average data	
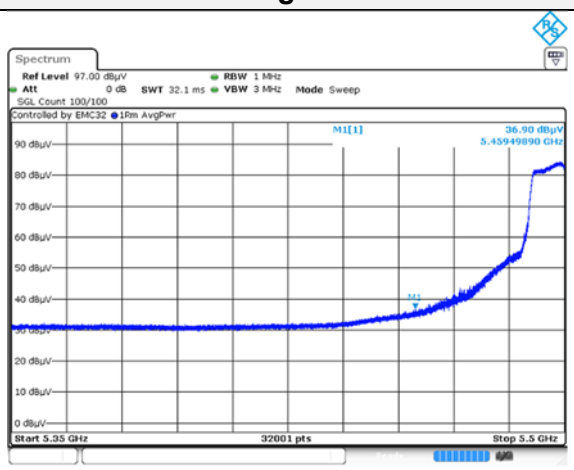	Blank

Horizontal/Vertical for Band-edge

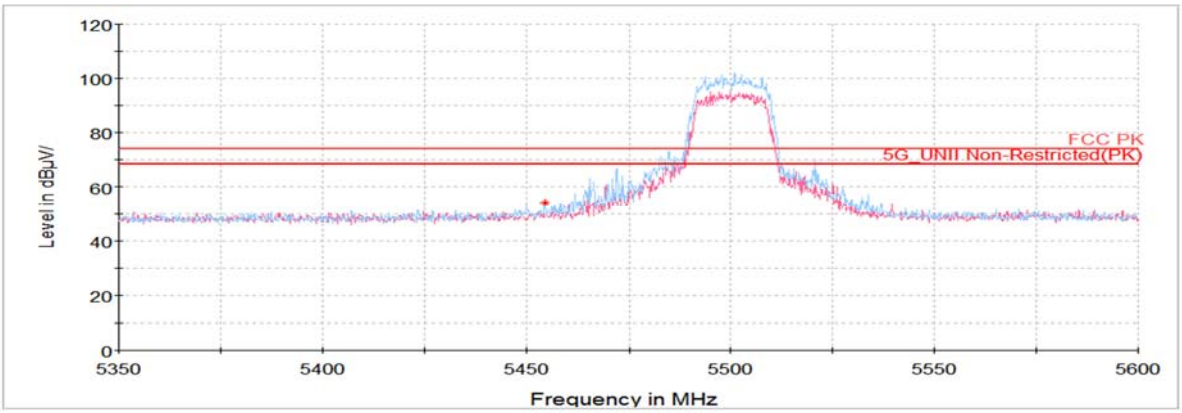

Highest Channel (5 700 ㎒)

Horizontal/Vertical for Band-edge (5 700 ㎒)

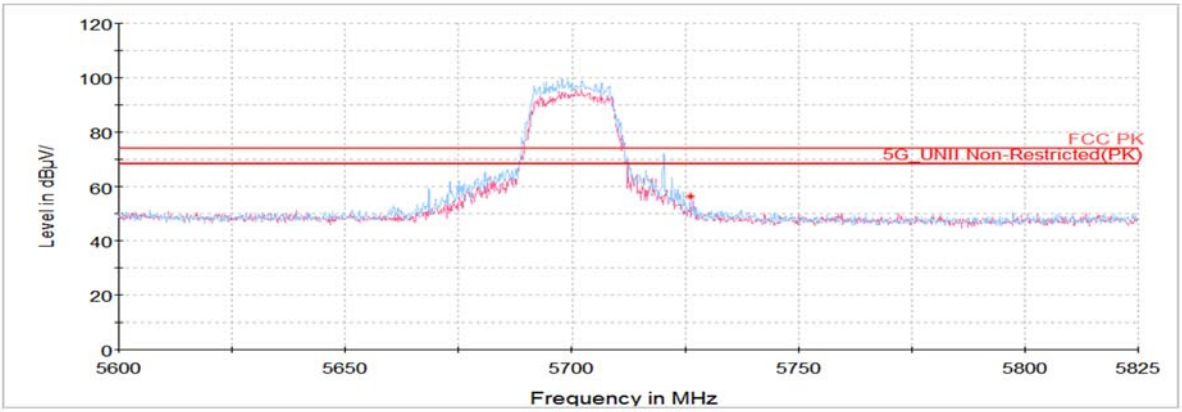

Plot of Harmonics and Spurious Emissions

In order to simplify the report, attached plots were only the lowest margin condition

802.11n HT20_UNII-2C_Lowest Channel (5 500 ㎒)

Horizontal/Vertical for 1 ㎓ ~ 6.5 ㎓

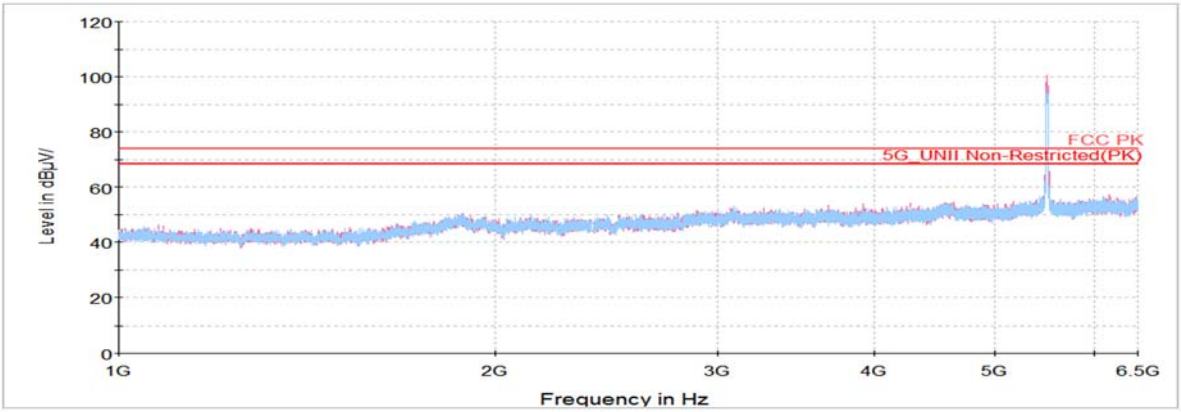

Horizontal/Vertical for 6.5 ㎓ ~ 18 ㎓

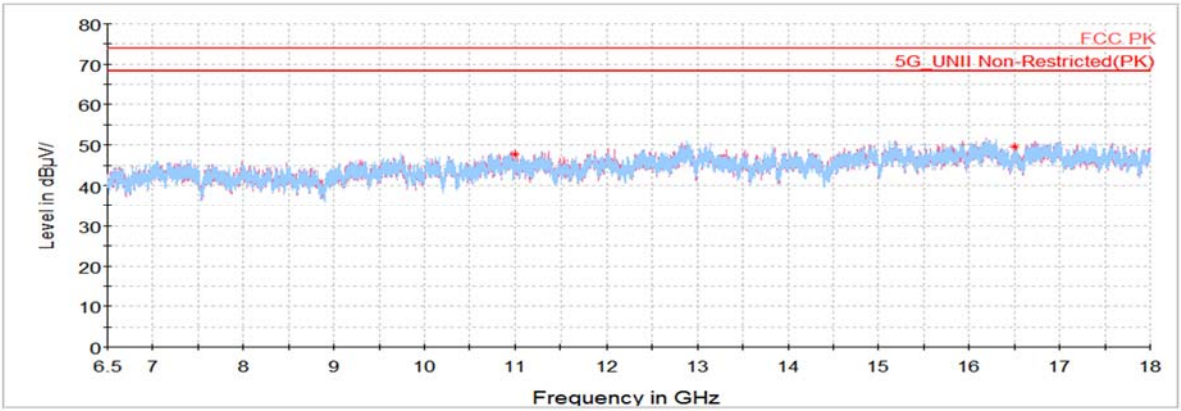

Horizontal/Vertical for 18 ㎓ ~ 40 ㎓

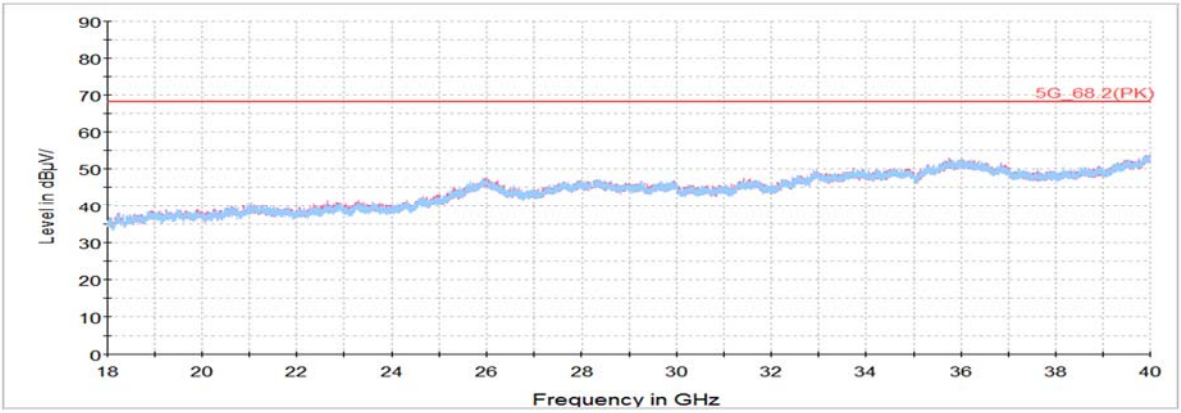

Straddle Channel

802.11a (5 720 ㎒)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
11 479.86[1)]	V	57.41	38.30	-50.37	-	45.34	74.00	28.66
17 191.77	H	56.29	40.58	-47.76	-	49.11	68.20	19.09
Average Data								
No spurious emissions were detected within 20 ㏈ of the limit.								

802.11n HT20 (5 720 ㎒)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
11 493.88[1)]	H	58.66	38.30	-50.42	-	46.54	74.00	27.46
17 187.09	V	57.47	40.59	-47.75	-	50.31	68.20	17.89
Average Data								
No spurious emissions were detected within 20 ㏈ of the limit.								

Plot of Harmonics and Spurious Emissions

In order to simplify the report, attached plots were only the lowest margin condition

802.11n HT20_Straddle Channel (5 720 ㎒)

Horizontal/Vertical for 1 ㎓ ~ 6.5 ㎓

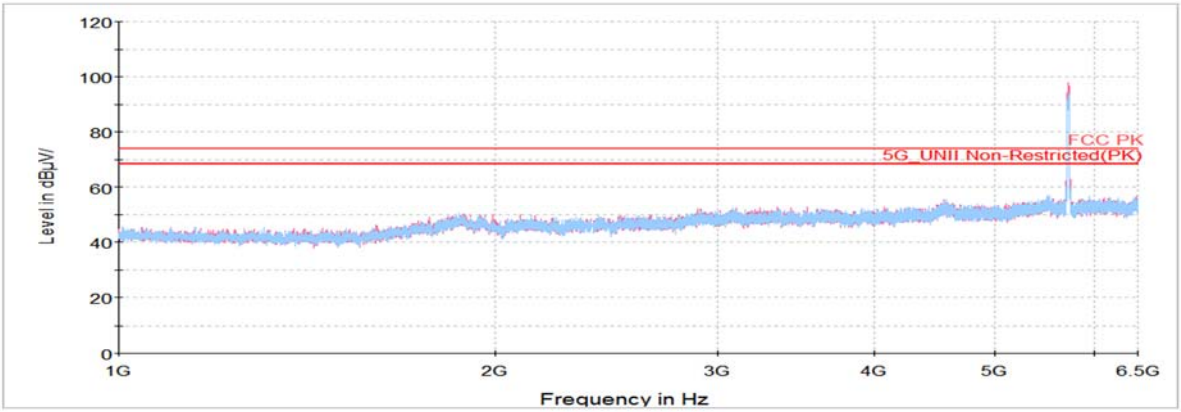

Horizontal/Vertical for 6.5 ㎓ ~ 18 ㎓

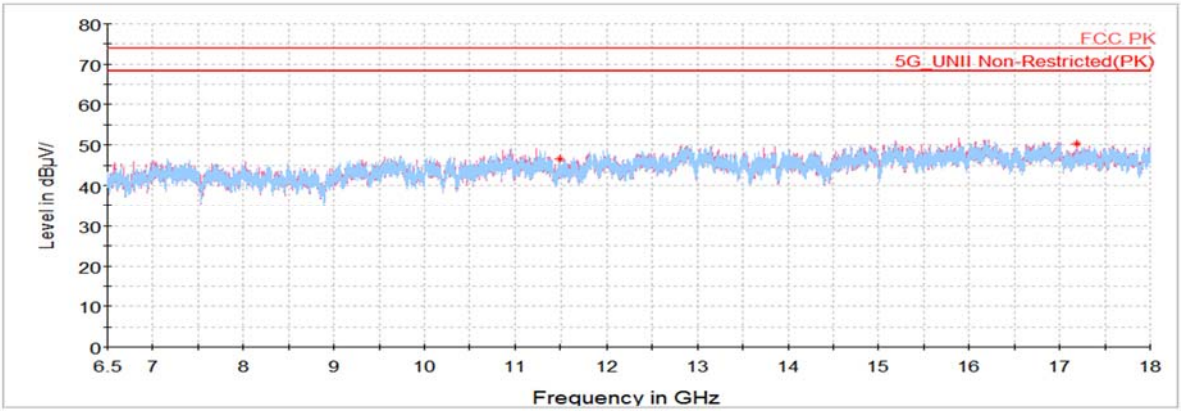

Horizontal/Vertical for 18 ㎓ ~ 40 ㎓

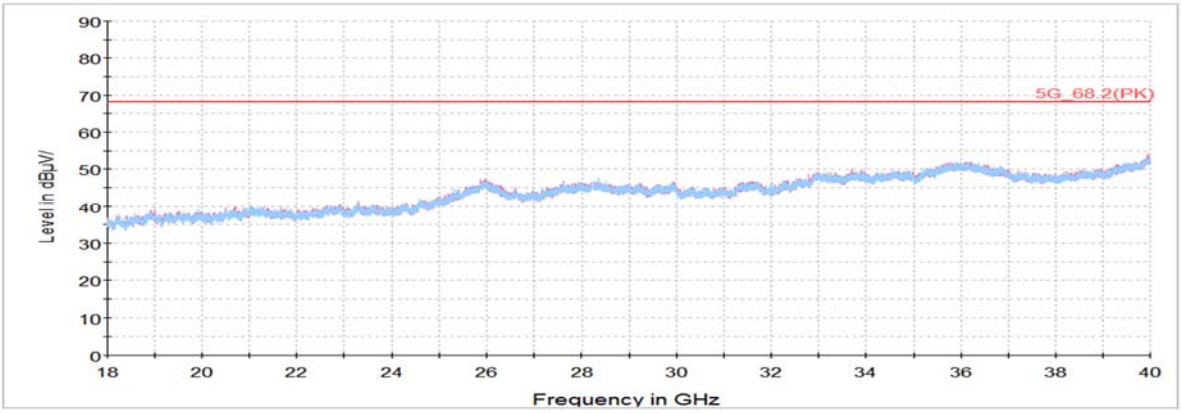

802.11a_UNII-3

Lowest Channel (5 745 ㎒)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
5 723.30	H	54.82	35.02	-26.43	-	63.41	118.32	54.91
11 501.42[1)]	H	58.63	38.30	-50.44	-	46.49	74.00	27.51
17 235.97	H	56.75	40.56	-47.78	-	49.53	68.20	18.67
Average Data								
No spurious emissions were detected within 20 ㏈ of the limit.								

Middle Channel (5 785 ㎒)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
11 530.53[1)]	H	58.50	38.32	-50.34	-	46.48	74.00	27.52
17 349.89	V	56.91	40.49	-47.86	-	49.54	68.20	18.66
Average Data								
No spurious emissions were detected within 20 ㏈ of the limit.								

Highest Channel (5 825 ㎒)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
5 853.23	H	42.36	35.15	-25.36	-	52.15	114.83	62.67
11 626.84[1)]	H	58.58	38.40	-50.02	-	46.96	74.00	27.04
17 497.95	V	56.99	40.40	-47.95	-	49.44	68.20	18.76
Average Data								
No spurious emissions were detected within 20 ㏈ of the limit.								

802.11n HT20_UNII-3

Lowest Channel (5 745 ㎒)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
5 723.64	H	52.84	35.02	-26.43	-	61.43	119.10	57.67
11 485.97[1)]	V	58.31	38.30	-50.39	-	46.22	74.00	27.78
17 202.19	V	56.83	40.58	-47.76	-	49.65	68.20	18.55
Average Data								
No spurious emissions were detected within 20 ㏈ of the limit.								

Middle Channel (5 785 ㎒)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
11 529.09[1)]	H	59.78	38.32	-50.35	-	47.75	74.00	26.25
17 355.64	V	57.14	40.49	-47.86	-	49.77	68.20	18.43
Average Data								
No spurious emissions were detected within 20 ㏈ of the limit.								

Highest Channel (5 825 ㎒)

Frequency	Pol.	Reading	Amp. + Cable	Antenna Factor	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
5 853.41	H	42.88	35.15	-25.36	-	52.67	114.43	61.76
11 666.73[1)]	V	58.64	38.43	-49.89	-	47.18	74.00	26.82
17 495.44	H	56.76	40.40	-47.95	-	49.21	68.20	18.99
Average Data								
No spurious emissions were detected within 20 ㏈ of the limit.								

Plot of Band-edge, Harmonics and Spurious Emissions

In order to simplify the report, attached plots were only the lowest margin condition

802.11a_UNII-3: Lowest Channel (5 745 ㎒)

Horizontal/Vertical for Band-edge
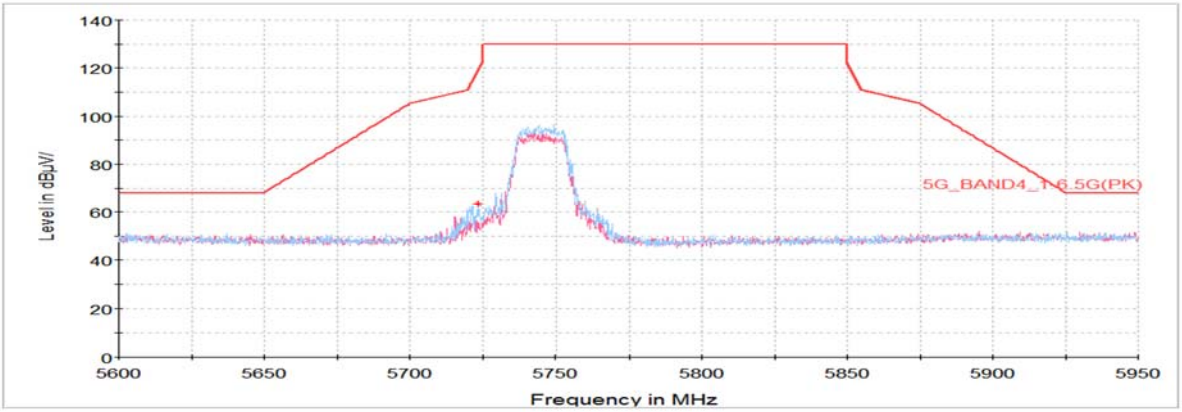

802.11n HT20_UNII-3_Middle Channel (5 785 ㎒)

Horizontal/Vertical for 1 ㎓ ~ 6.5 ㎓

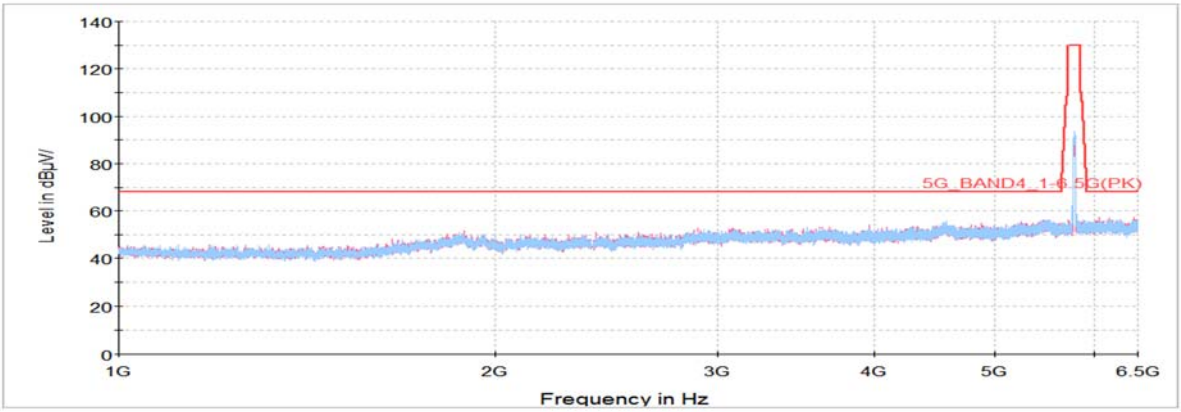

Horizontal/Vertical for 6.5 ㎓ ~ 18 ㎓

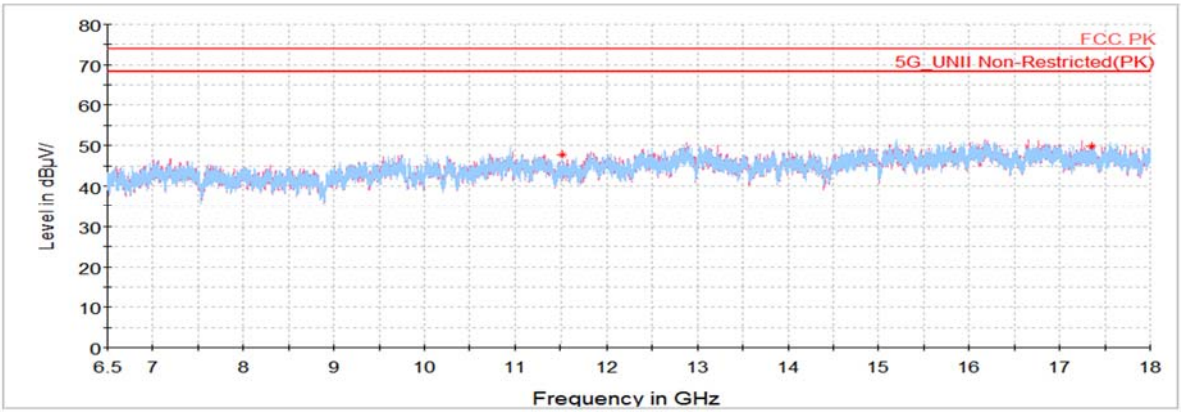

Horizontal/Vertical for 18 ㎓ ~ 40 ㎓

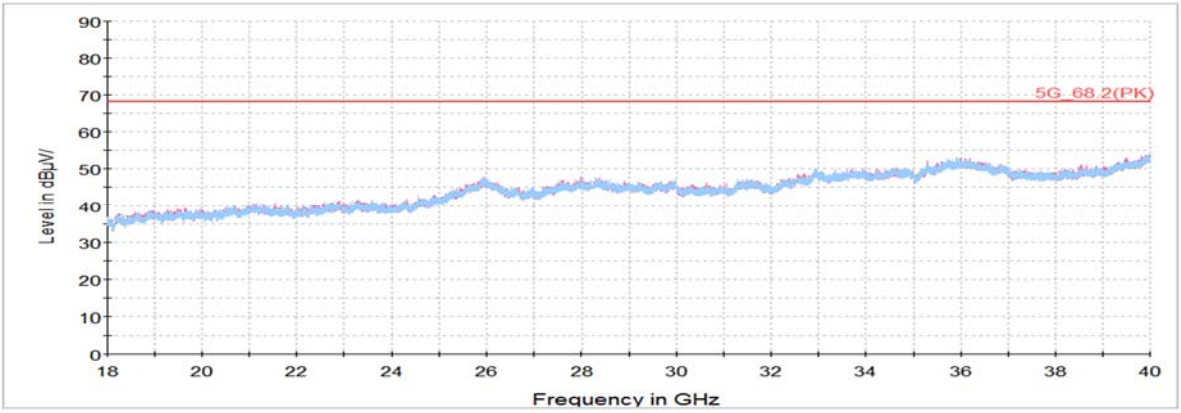

Spurious Emission for Simultaneous Tx Condition

Case	WLAN 5 GHz	Bluetooth
Mode	802.11a	EDR
Channel	120	39
Frequency	5 600	2 441
Data Rate	6	3-DH1

Notes.
The lowest margin condition among the channels and modes were selected for test.

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
4 882.48[1)]	H	64.23	33.83	-53.14	-	44.92	74.00	29.08
7 334.11[1)]	V	59.79	35.30	-50.51	-	44.58	74.00	29.42
11 213.92[1)]	H	57.24	38.24	-49.42	-	46.06	74.00	27.94
16 789.27	V	56.09	41.23	-47.74	-	49.58	68.20	18.62
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for 1 ㎓ ~ 3.5 ㎓

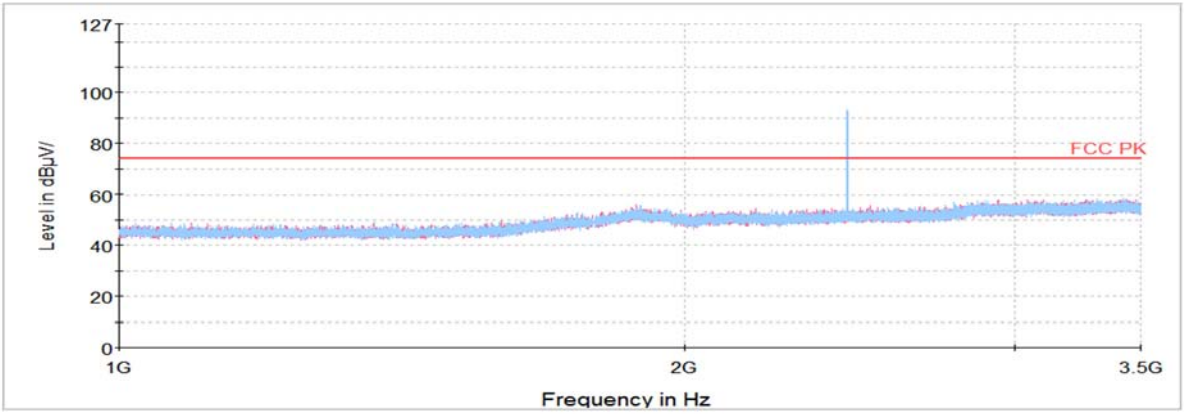

Horizontal/Vertical for 3.5 ㎓ ~ 5 ㎓

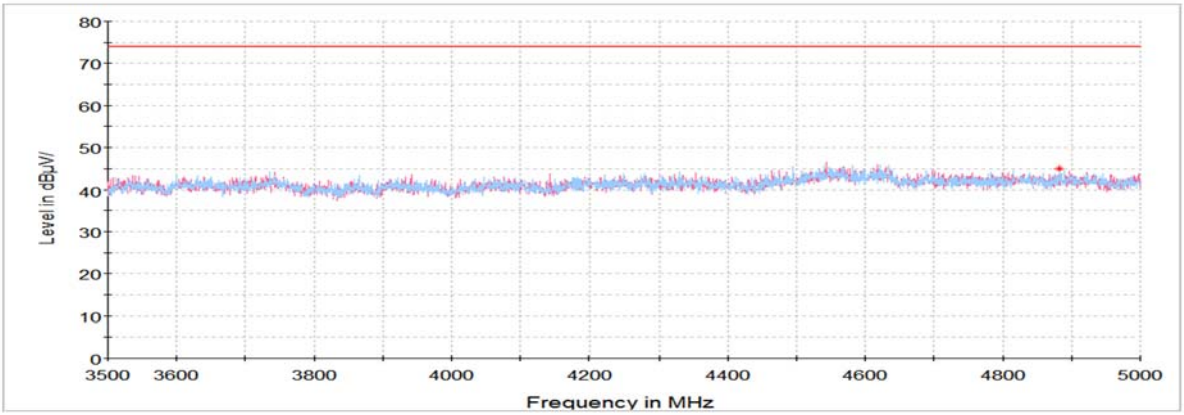

Horizontal/Vertical for 5 ㎓ ~ 6.5 ㎓

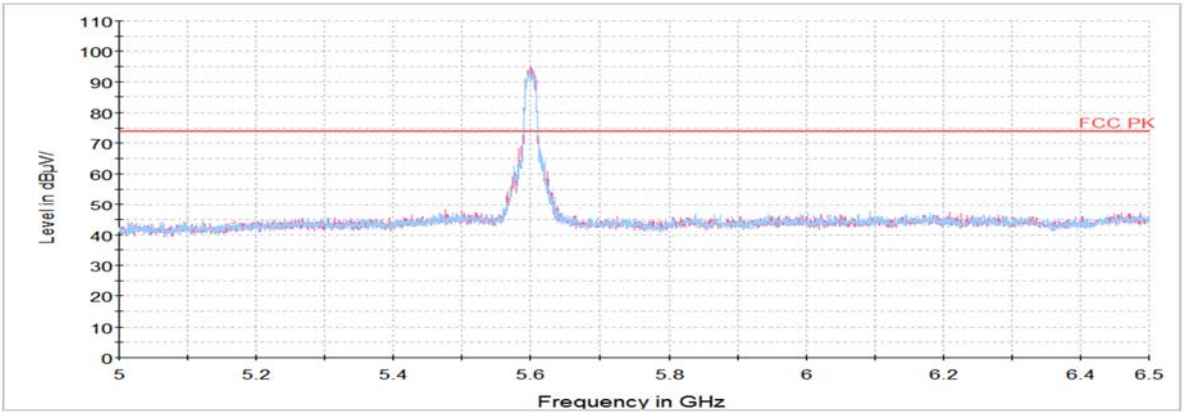

Horizontal/Vertical for 6.5 ㎓ ~ 18 ㎓

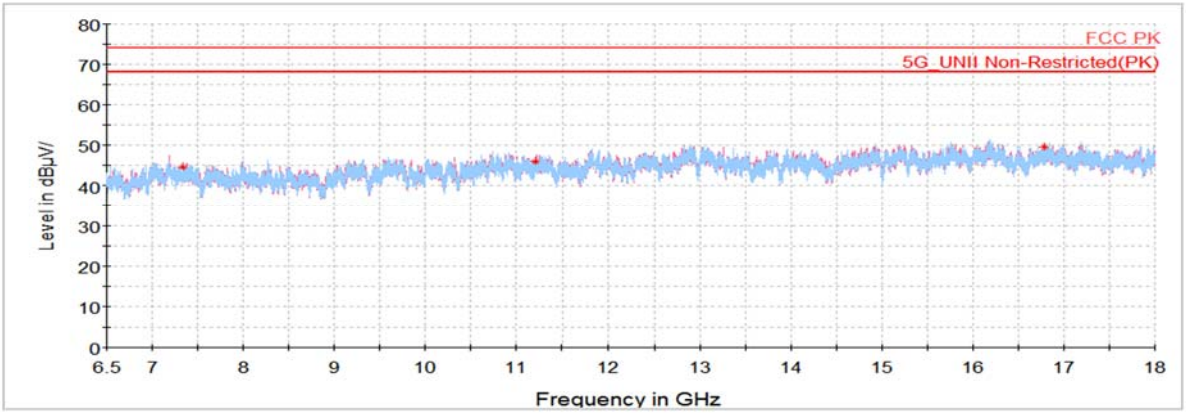

Horizontal/Vertical for 18 ㎓ ~ 40 ㎓

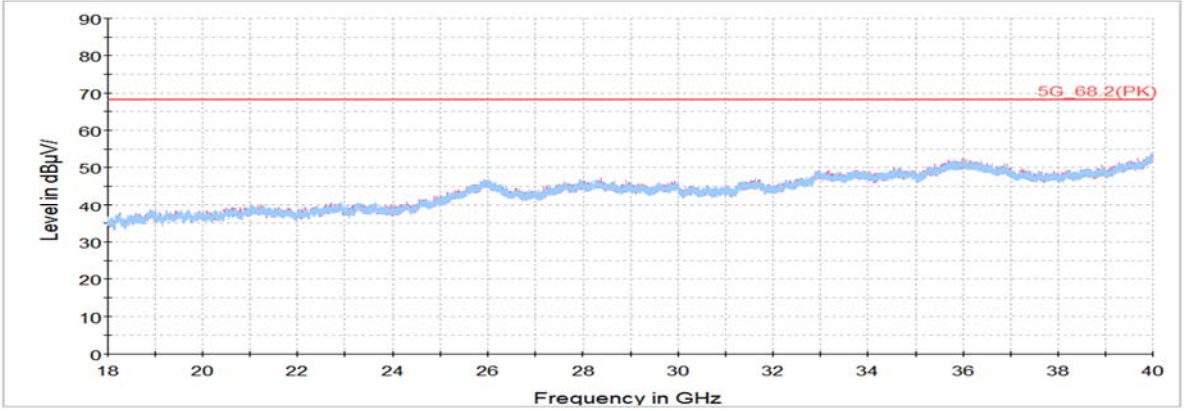

7.7. AC Conducted emission

Test setup

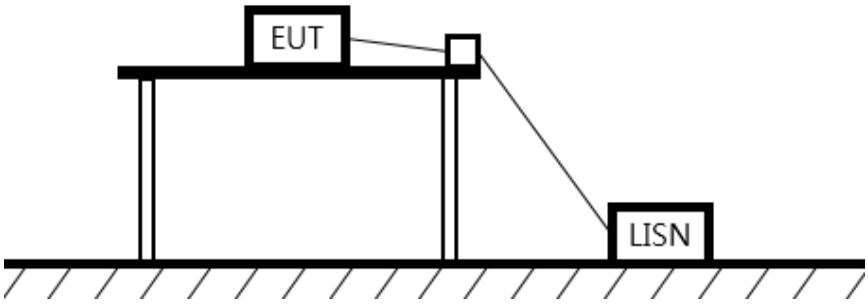

Limit

§15.407

According to 15.207(a) and RSS-Gen (8.8), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 ㎑ to 30 ㎒, shall not exceed the limits in the following table, as measured using a 50uH/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.

Frequency of Emission (㎒)	Conducted limit (dBμV/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

Measurement procedure

1. The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 ㎝ in which is located 40 ㎝ away from the vertical wall and 1.5m away from the side wall of the shielded room.
2. Each current-carrying conductor of the EUT power cord was individually connected through a 50Ω/50μH LISN, which is an input transducer to a spectrum analyzer or an EMI/Field Intensity Meter, to the input power source.
3. Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
4. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment is the system) was then performed over the frequency range of 0.15 ㎒ to 30 ㎒.
5. The measurements were made with the detector set to peak amplitude within a bandwidth of 10 ㎑ or to quasi-peak and average within a bandwidth of 9 ㎑. The EUT was in transmitting mode during the measurements.

Test results

Worst case: 802.11a / UNII-1 5 180 ㎒

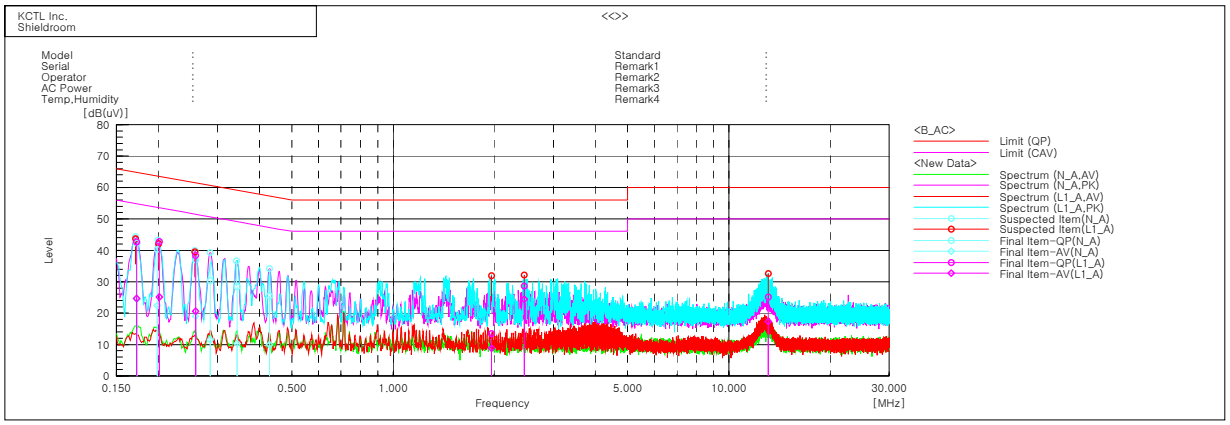

Final Result

--- N_A Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.17276	32.1	14.3	10.2	42.3	24.5	64.8	54.8	22.5	30.3
2	0.19861	30.2	12.3	10.1	40.3	22.4	63.7	53.7	23.4	31.3
3	0.25808	27.1	9.2	9.8	36.9	19.0	61.5	51.5	24.6	32.5
4	0.28567	20.6	1.8	9.8	30.4	11.6	60.6	50.6	30.2	39.0
5	0.34333	18.5	0.3	9.9	28.4	10.2	59.1	49.1	30.7	38.9
6	0.42837	15.4	-0.1	10.0	25.4	9.9	57.3	47.3	31.9	37.4

--- L1_A Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.17221	32.5	14.5	10.2	42.7	24.7	64.9	54.9	22.2	30.2
2	0.20119	32.8	15.1	10.0	42.8	25.1	63.6	53.6	20.8	28.5
3	0.2584	28.6	10.8	9.8	38.4	20.6	61.5	51.5	23.1	30.9
4	1.96522	3.5	-1.0	9.9	13.4	8.9	56.0	46.0	42.6	37.1
5	2.45738	18.7	14.5	9.9	28.6	24.4	56.0	46.0	27.4	21.6
6	13.10192	14.7	6.9	10.4	25.1	17.3	60.0	50.0	34.9	32.7

8. Measurement equipment

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
Spectrum Analyzer	R&S	FSV30	100807	21.07.29
Attenuator	API Inmet	40AH2W-10	16	22.05.11*
Signal Generator	R&S	SMB100A	176206	22.01.20
Vector Signal Generator	R&S	SMBV100A	257566	21.07.13
Power Sensor	R&S	NRP-Z81	1137.9009.02-106223-bB	22.05.11*
Attenuator	R&S	DNF Dämpfungsglied 10 dB in N-50 Ohm	31211	22.05.11*
DC Power Supply	Agilent	E3632A	MY40008800	21.07.28
Spectrum Analyzer	R&S	FSV40	100989	21.12.23
EMI TEST RECEIVER	R&S	ESCI3	101408	21.08.20
Bi-Log Antenna	TESEQ	CBL 6112D	55545	22.04.24
Attenuator	KEYSIGHT	8491B-6dB	MY39271060	21.12.24
Spectrum Analyzer	R&S	ESCI7	100732	22.03.05
ISOLATION TRANSFORMER	ONETECH CO., LTD	OT-IT500VA	OTR1-16026	22.04.02
Amplifier	SONOMA INSTRUMENT	310N	284608	21.08.20
COAXIAL FIXED ATTENUATOR	Agilent	8491B-003	2708A18758	22.04.23
Directional Bridge	AGILENT	86205A	MY31400127	22.01.20
Horn antenna	ETS.lindgren	3117	00155787	21.10.28
Horn antenna	ETS.lindgren	3116	00086632	22.01.29
Attenuator	API Inmet	40AH2W-10	12	22.05.11*
Broadband Pre-Amplifier	SCHWARZBECK	BBV9718	216	21.07.28
AMPLIFIER	L-3 Narda-MITEQ	AMF-7D-01001800 -22-10P	2003683	21.08.28
AMPLIFIER	L-3 Narda-MITEQ	JS44-18004000-33-8P	2000996	22.01.21
LOOP Antenna	R&S	HFH2-Z2	100355	22.08.21
Antenna Mast	Innco Systems	MA4640-XP-ET	-	-
Turn Table	Innco Systems	DT2000	79	-
Antenna Mast	Innco Systems	MA4000-EP	303	-
Turn Table	Innco Systems	DT2000	79	-
High pass Filter	WT	WT-A1698-HS	WT160411001	22.05.10*
TWO-LINE V - NETWORK	R&S	ENV216	101358	21.09.29
EMI TEST RECEIVER	R&S	ESCI	100001	21.08.20

* Tests related to this equipment were progressed after the calibration was completed.

End of test report