

APPENDIX B: SYSTEM VERIFICATION

PCTEST

DUT: Dipole 750.0 MHz; Type: D750V3 - SN1003

Communication System: UID: 0, CW; Frequency: 750.0 MHz
Medium: 750 Head; Medium parameters used:
f = 750.0 MHz; cond = 0.921 S/m; perm = 42.5; density = 1000 kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 09/26/2021; Ambient Temp: 23.5°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7406; ConvF:(10.08,10.08,10.08); Calibrated: 2021-07-20
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1676; Calibrated: 2021-06-21
Phantom: Twin-SAM V8.0; Serial: 2058
Measurement SW: DASY Module SAR V16.0.0.65

750 MHz System Verification at 23 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.58 W/kg

SAR(1 g) = 1.62 W/kg

Deviation (1 g) = -7.74%

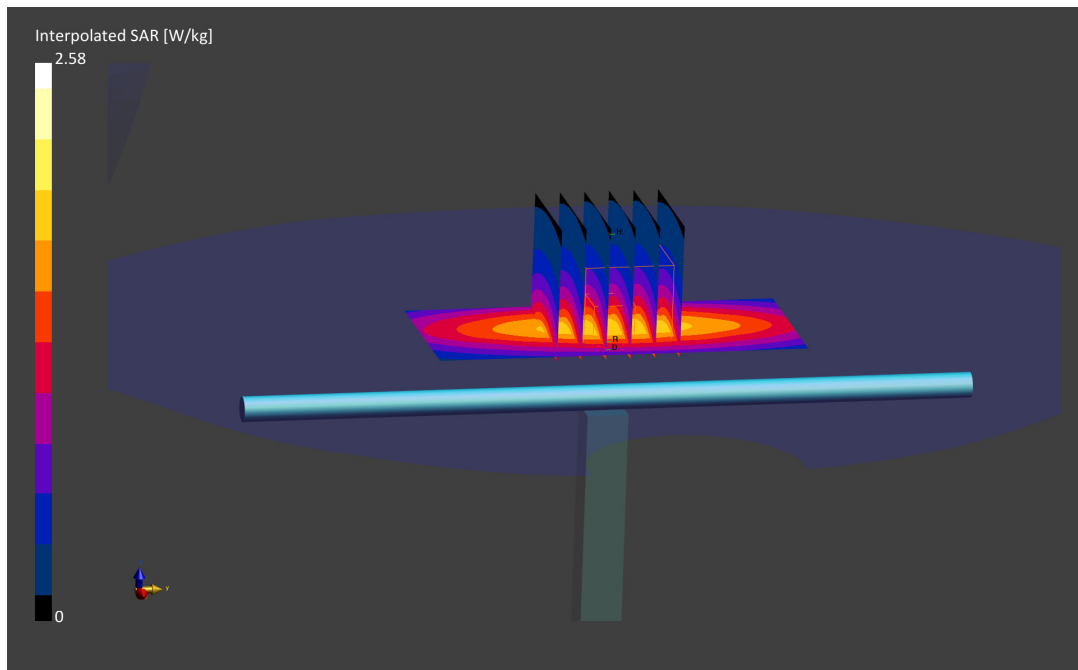

PCTEST

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1034

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1
Medium: 750 Head Medium parameters used:
 $f = 750 \text{ MHz}$; $\sigma = 0.915 \text{ S/m}$; $\epsilon_r = 40.566$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10/12/2021; Ambient Temp: 21.6°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7402; ConvF(10.26, 10.26, 10.26) @ 750 MHz; Calibrated: 4/16/2021
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1502; Calibrated: 4/9/2021
Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1868
Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.53 W/kg

SAR(1 g) = 1.7 W/kg

Deviation(1 g) = -1.62%

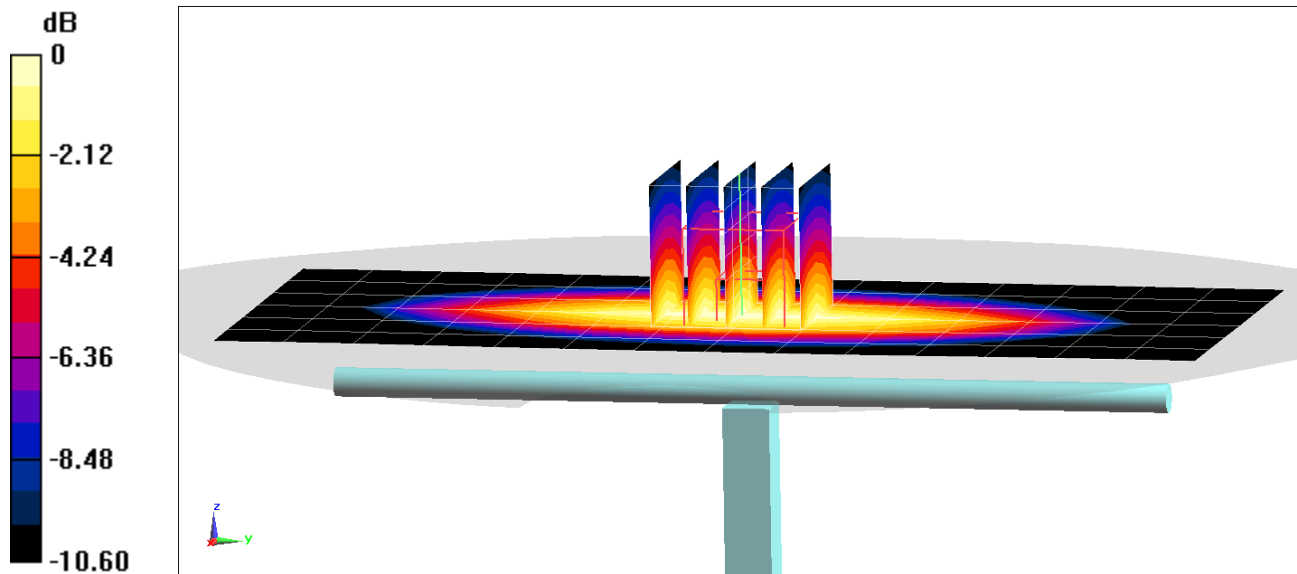

0 dB = 2.26 W/kg = 3.54 dBW/kg

PCTEST

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d180

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.945 \text{ S/m}$; $\epsilon_r = 42.933$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09/22/2021; Ambient Temp: 22.1°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN7402; ConvF(10.05, 10.05, 10.05) @ 835 MHz; Calibrated: 04/16/2021

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1502; Calibrated: 04/09/2021

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1868

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 3.03 W/kg

SAR(1 g) = 1.98 W/kg

Deviation(1 g) = 4.76%

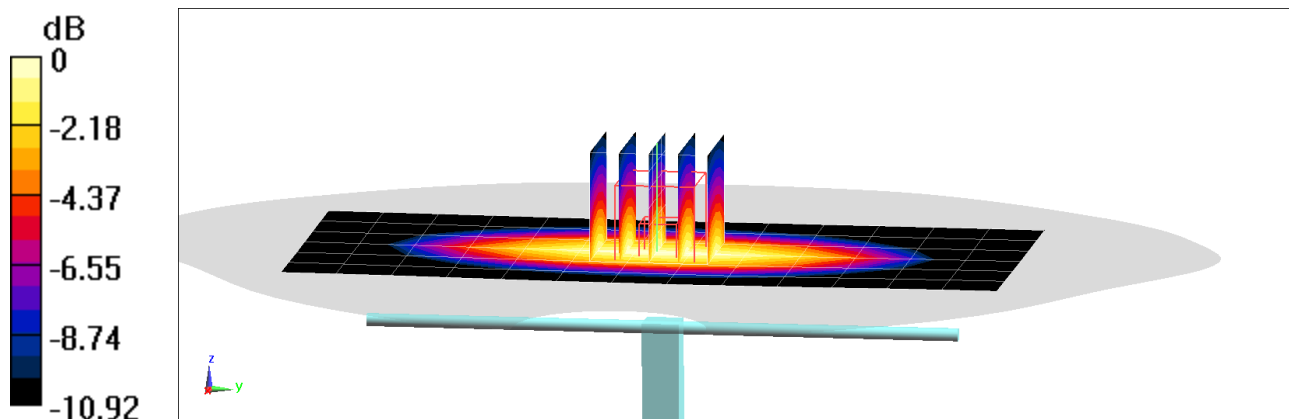

0 dB = 2.68 W/kg = 4.28 dBW/kg

PCTEST

DUT: Dipole 835 MHz Type: D835V2; Serial: 4d180

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.929 \text{ S/m}$; $\epsilon_r = 43.21$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09/27/2021; Ambient Temp: 19.5°C; Tissue Temp: 19.3°C

Probe: EX3DV4 - SN7402; ConvF(10.05, 10.05, 10.05) @ 835 MHz; Calibrated: 04/16/2021

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1502; Calibrated: 04/09/2021

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1868

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.95 W/kg

SAR(1 g) = 1.97 W/kg

Deviation(1 g) = 4.23%

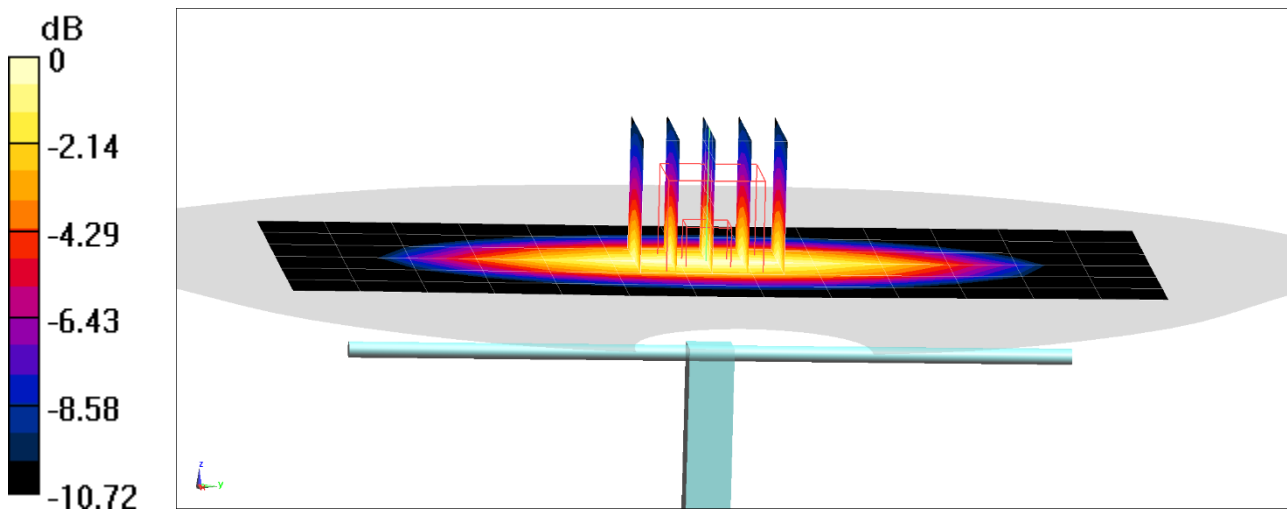

0 dB = 2.63 W/kg = 4.20 dBW/kg

PCTEST

DUT: Dipole 835.0 MHz; Type: D835V2 - SN4d133

Communication System: UID: 0, CW; Frequency: 835.0 MHz

Medium: 835 Head; Medium parameters used:

f = 835.0 MHz; cond = 0.939 S/m; perm = 42.1; density = 1000 kg/m³

Phantom Section: Flat; Space: 15 mm

Test Date: 09/28/2021; Ambient Temp: 23.9°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7406; ConvF:(9.68,9.68,9.68); Calibrated: 2021-07-20

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1676; Calibrated: 2021-06-21

Phantom: Twin-SAM V8.0; Serial: 2058

Measurement SW: DASY Module SAR V16.0.0.65

835 MHz System Verification at 23 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 3.04 W/kg

SAR(1 g) = 1.97 W/kg

Deviation (1 g) = 4.45%

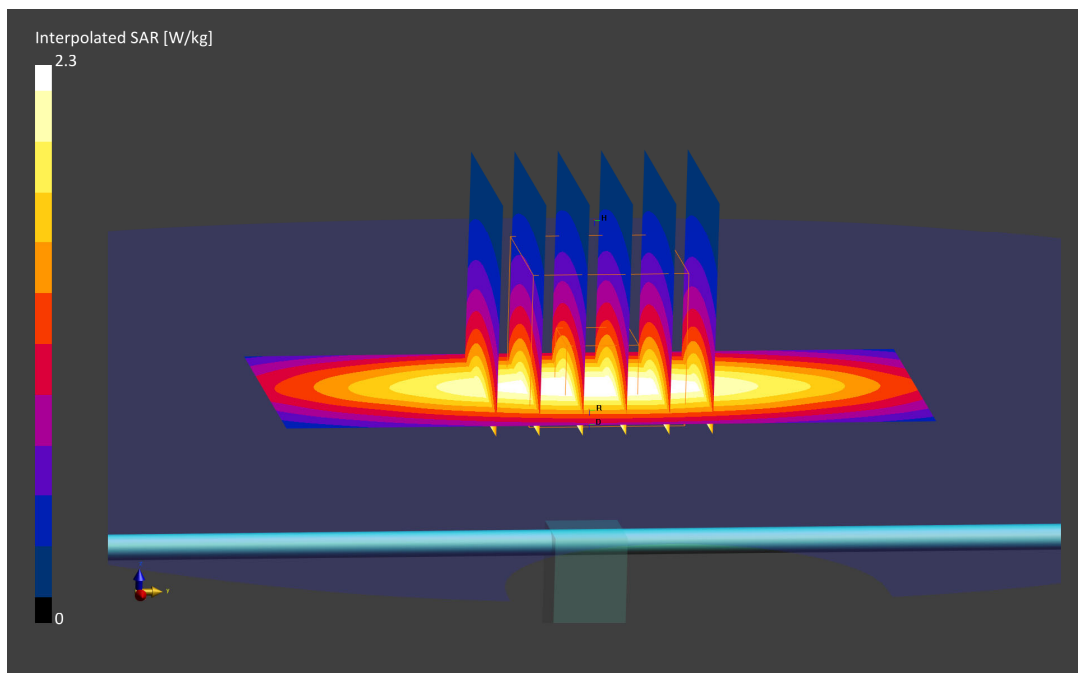

PCTEST

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d119

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium: 835 Head; Medium parameters used:
 $f = 835 \text{ MHz}$; $\sigma = 0.898 \text{ S/m}$; $\epsilon_r = 40.234$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09/30/2021; Ambient Temp: 20.1°C; Tissue Temp: 19.9°C

Probe: EX3DV4 - SN7565; ConvF(9.11, 9.11, 9.11) @ 835 MHz; Calibrated: 11/12/2020
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1466; Calibrated: 11/6/2020
Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1626
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.97 W/kg

SAR(1 g) = 2.04 W/kg

Deviation(1 g) = 5.81%

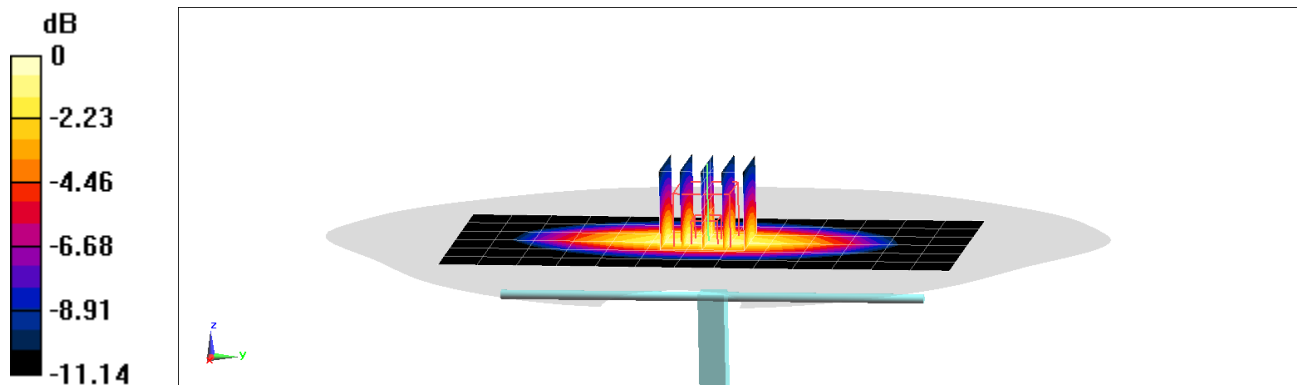

0 dB = 2.97 W/kg = 4.73 dBW/kg

PCTEST

DUT: Dipole 1750.0 MHz; Type: D1750V2 - SN1150

Communication System: UID: 0, CW; Frequency: 1750.0 MHz
Medium: 1750 Head; Medium parameters used:
f = 1750.0 MHz; cond = 1.37 S/m; perm = 40.9; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 09/22/2021; Ambient Temp: 23.6°C; Tissue Temp: 23.1°C

Probe: EX3DV4 - SN7406; ConvF:(8.26,8.26,8.26); Calibrated: 2021-07-20
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1676; Calibrated: 2021-06-21
Phantom: Twin-SAM V8.0; Serial: 2058
Measurement SW: DASY Module SAR V16.0.0.65

1750 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 7.09 W/kg

SAR(1 g) = 3.68 W/kg

Deviation (1 g) = 0.82%

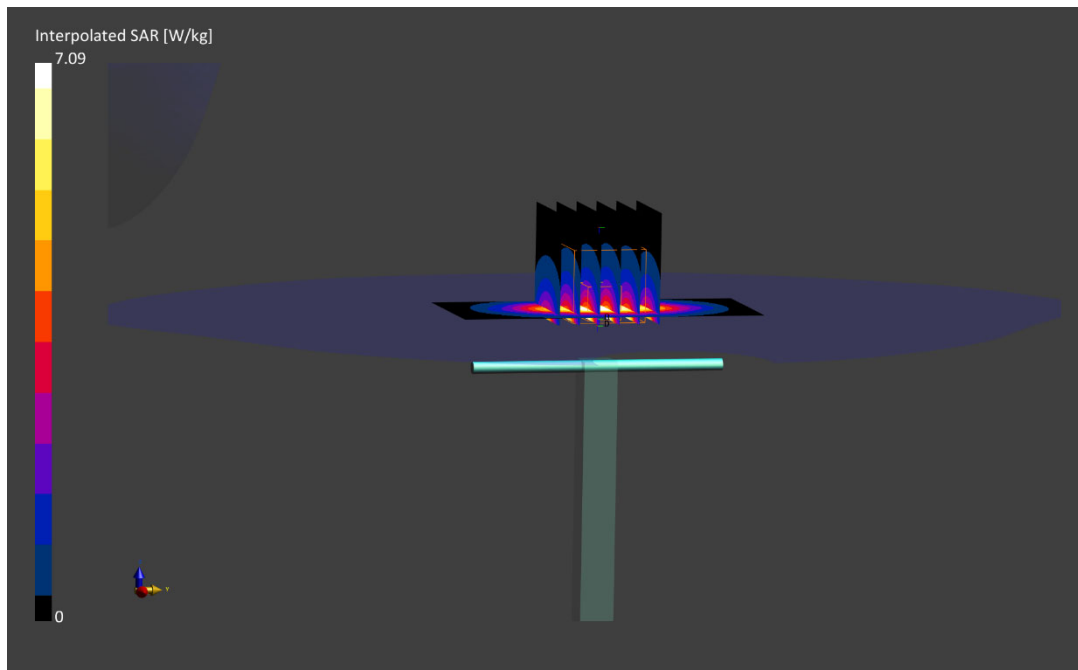

PCTEST

DUT: Dipole 1750.0 MHz; Type: D1750V2 - SN1150

Communication System: UID: 0, CW; Frequency: 1750.0 MHz
Medium: 1750 Head; Medium parameters used:
f = 1750.0 MHz; cond = 1.37 S/m; perm = 39.3; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 10/04/2021; Ambient Temp: 24.0°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7406; ConvF:(8.26,8.26,8.26); Calibrated: 2021-07-20
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1676; Calibrated: 2021-06-21
Phantom: Twin-SAM V8.0; Serial: 2058
Measurement SW: DASY8 Module SAR V16.0.0.65

1750 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 7.56 W/kg

SAR(1 g) = 3.84 W/kg

Deviation (1 g) = 5.21%

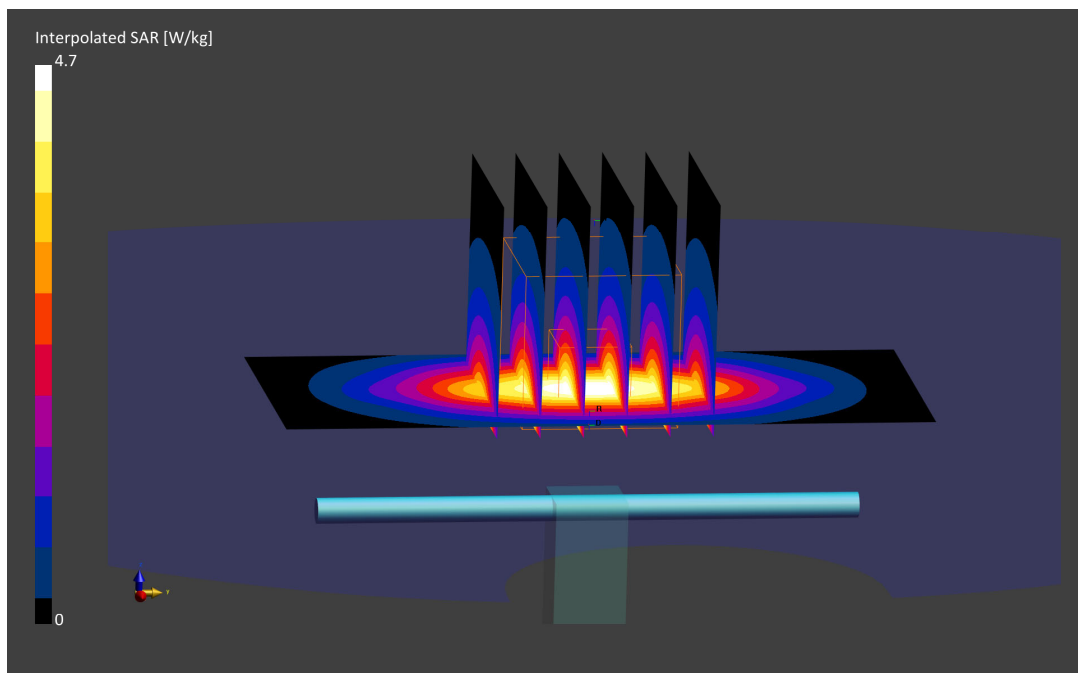

PCTEST

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1148

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.351 \text{ S/m}$; $\epsilon_r = 40.506$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10/24/2021; Ambient Temp: 21.0°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7409; ConvF(8.3, 8.3, 8.3) @ 1750 MHz; Calibrated: 6/21/2021

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/15/2021

Phantom: Twin-SAM V5.0 Front (20); Type: QD 000 P40 CD; Serial: 1759

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7495)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.03 W/kg

SAR(1 g) = 3.82 W/kg

Deviation(1 g) = 6.41%

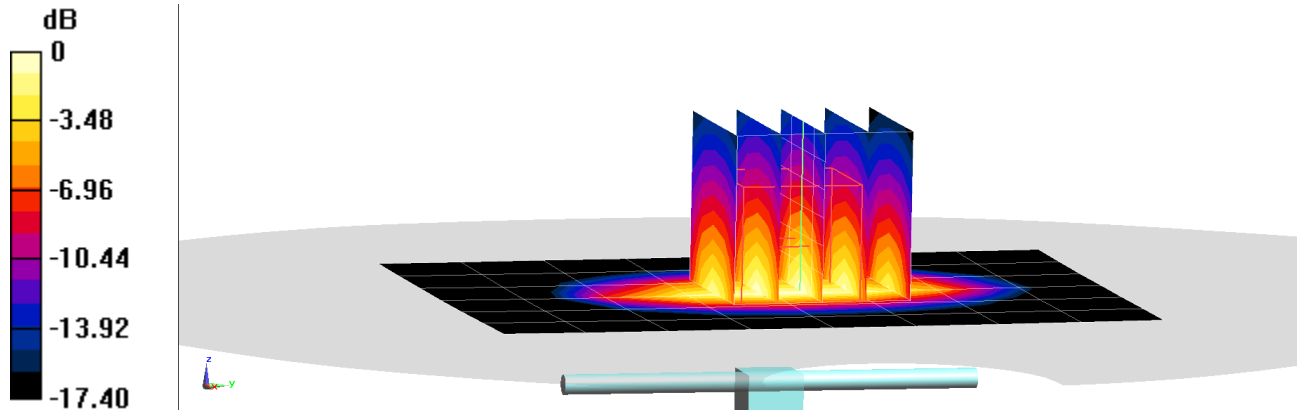

0 dB = 5.87 W/kg = 7.69 dBW/kg

PCTEST

DUT: Dipole 1900.0 MHz; Type: D1900V2 - SN5d080

Communication System: UID: 0, CW; Frequency: 1900.0 MHz
Medium: 1900 Head; Medium parameters used:
f = 1900.0 MHz; cond = 1.44 S/m; perm = 38.9; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 09/19/2021; Ambient Temp: 22.9°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7406; ConvF:(7.98,7.98,7.98); Calibrated: 2021-07-20
Sensor-Surface: 1.4mm (All points)
Electronics: DAE4 Sn1676; Calibrated: 2021-06-21
Phantom: Twin-SAM V8.0; Serial: 2058
Measurement SW: cDASY6 Module SAR V16.0.0.65

1900.0 MHz System Verification at 20.0 dBm


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 8.55 W/kg

SAR(1 g) = 4.27 W/kg

Deviation (1 g) = 7.29%

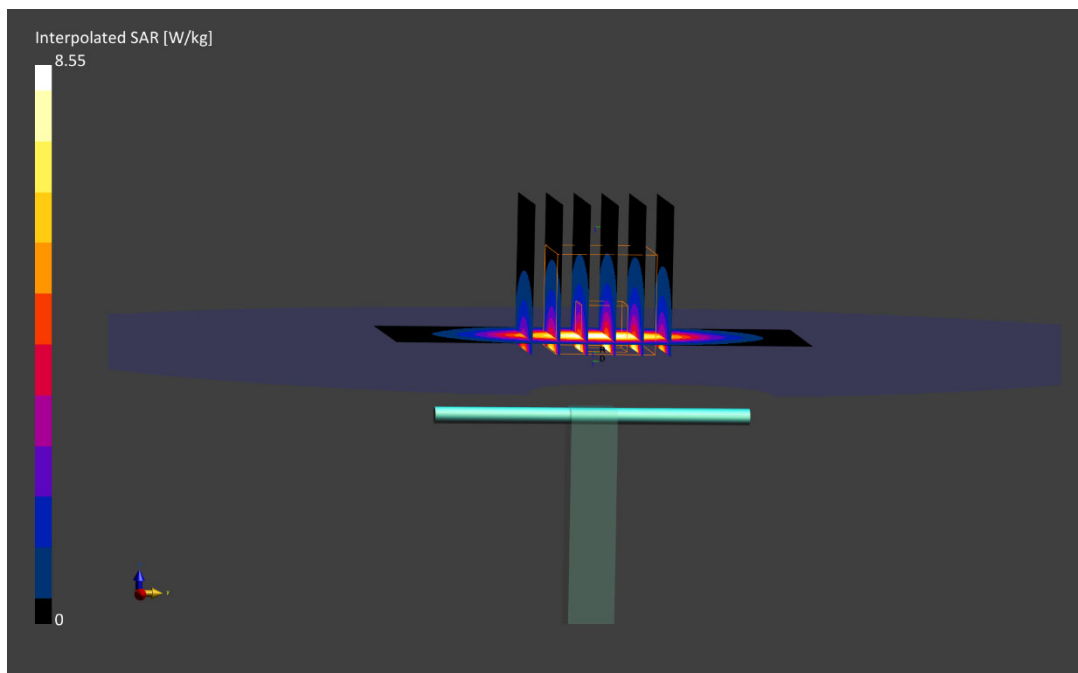

PCTEST

DUT: Dipole 1900.0 MHz; Type: D1900V2 - SN5d148

Communication System: UID: 0, CW; Frequency: 1900.0 MHz
Medium: 1900 Head; Medium parameters used:
f = 1900.0 MHz; cond = 1.46 S/m; perm = 39.3; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 09/30/2021; Ambient Temp: 24.9°C; Tissue Temp: 23.7°C

Probe: EX3DV4 - SN7406; ConvF:(7.98,7.98,7.98); Calibrated: 2021-07-20
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1676; Calibrated: 2021-06-21
Phantom: Twin-SAM V8.0; Serial: 2058
Measurement SW: DASY Module SAR V16.0.0.65

1900 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 8.07 W/kg

SAR(1 g) = 4.09 W/kg

Deviation (1 g) = 4.60%

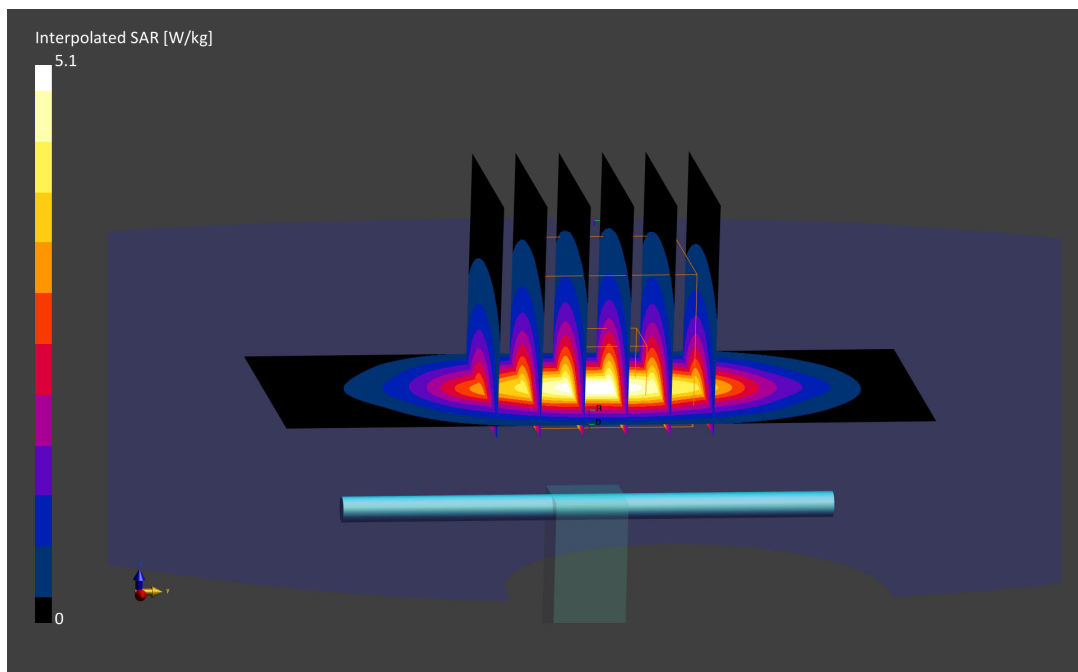

PCTEST

DUT: Dipole 1900.0 MHz; Type: D1900V2 - SN5d148

Communication System: UID: 0, CW; Frequency: 1900.0 MHz
Medium: 1900 Head; Medium parameters used:
f = 1900.0 MHz; cond = 1.46 S/m; perm = 38.7; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 10/17/2021; Ambient Temp: 24.0°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7406; ConvF:(7.98,7.98,7.98); Calibrated: 2021-07-20
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1676; Calibrated: 2021-06-21
Phantom: Twin-SAM V8.0; Serial: 2058
Measurement SW: DASY Module SAR V16.0.0.65

1900 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 8.15 W/kg

SAR(1 g) = 4.14 W/kg

Deviation (1 g) = 5.88%

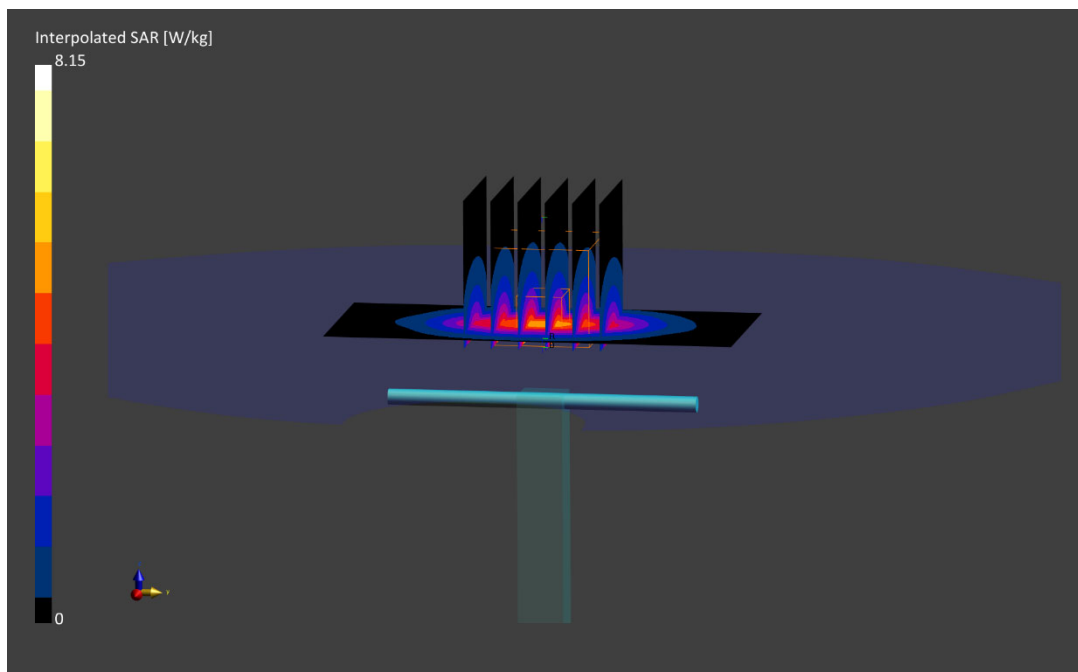

PCTEST

DUT: Dipole 2300.0 MHz; Type: D2300V3 - SN1073

Communication System: UID: 0, CW; Frequency: 2300.0 MHz
Medium: 2450 Head; Medium parameters used:
f = 2300.0 MHz; cond = 1.66 S/m; perm = 40.6; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 10/17/2021; Ambient Temp: 24.3°C; Tissue Temp: 23.5°C

Probe: EX3DV4 - SN7660; ConvF:(8.66,8.66,8.66); Calibrated: 2021-06-28
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1677; Calibrated: 2021-06-22
Phantom: Twin-SAM V8.0; Serial: 2056
Measurement SW: DASY Module SAR V16.0.0.65

2300 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 10.1 W/kg

SAR(1 g) = 4.73 W/kg

Deviation (1 g) = -4.44%

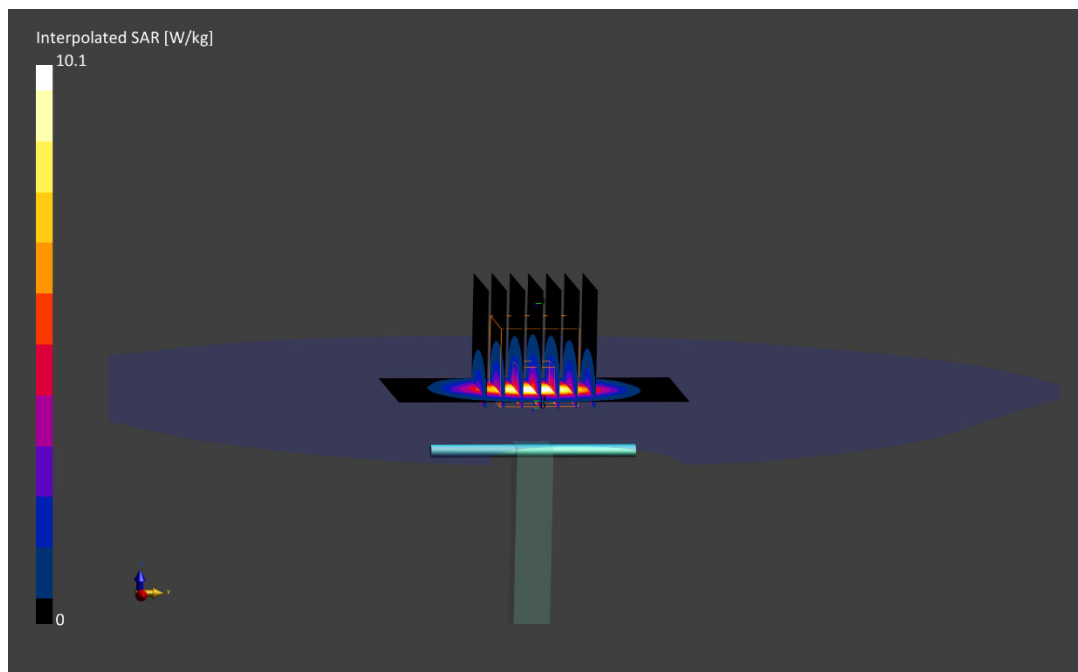

PCTEST

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN797

Communication System: UID: 0, CW; Frequency: 2450.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2450.0 MHz; cond = 1.85 S/m; perm = 38.1; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 10/06/2021; Ambient Temp: 23.0°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7660; ConvF:(8.49,8.49,8.49); Calibrated: 2021-06-28

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1677; Calibrated: 2021-06-22

Phantom: Twin-SAM V8.0; Serial: 2056

Measurement SW: DASY Module SAR V16.0.0.65

2450 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 11.8 W/kg

SAR(1 g) = 5.54 W/kg

Deviation (1 g) = 5.73%

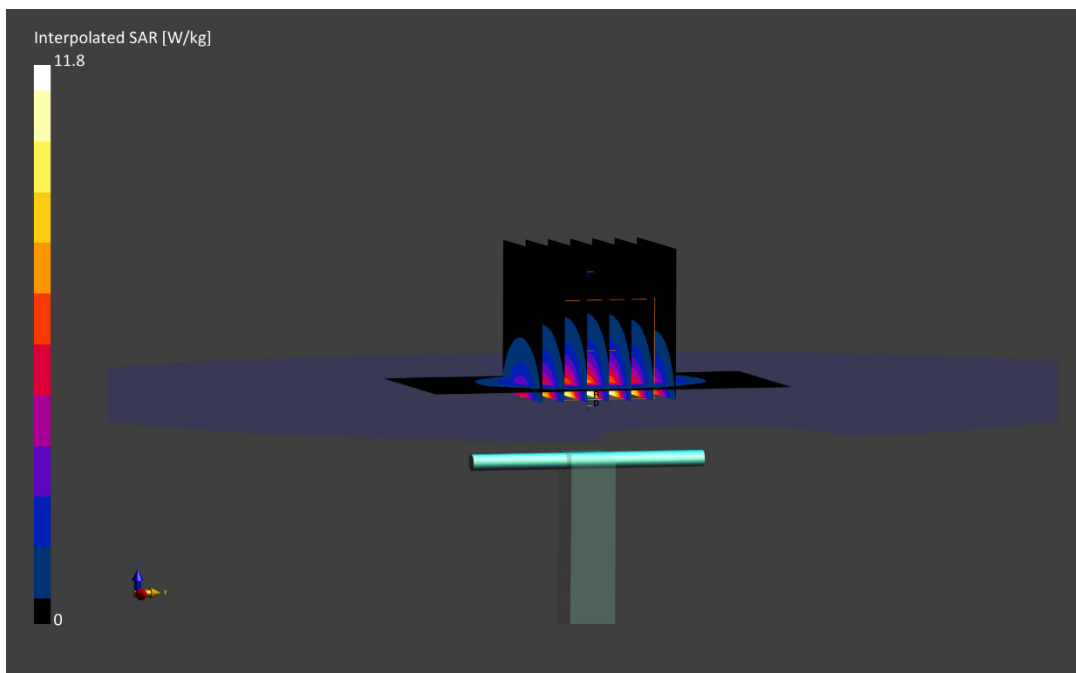

PCTEST

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN797

Communication System: UID: 0, CW; Frequency: 2450.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2450.0 MHz; cond = 1.88 S/m; perm = 38.3; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 10/10/2021; Ambient Temp: 23.4°C; Tissue Temp: 23.2°C

Probe: EX3DV4 - SN7660; ConvF:(8.49,8.49,8.49); Calibrated: 2021-06-28

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1677; Calibrated: 2021-06-22

Phantom: Twin-SAM V8.0; Serial: 2056

Measurement SW: DASY Module SAR V16.0.0.65

2450 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 10.7 W/kg

SAR(1 g) = 5.08 W/kg

Deviation (1 g) = -3.05%

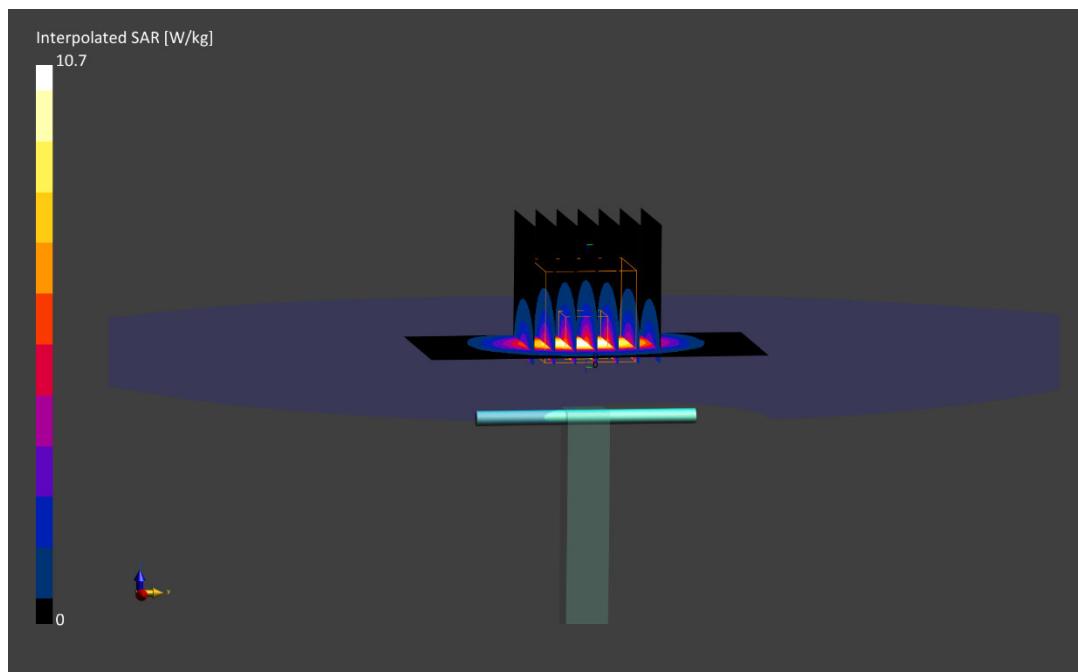

PCTEST

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN719

Communication System: UID: 0, CW; Frequency: 2450.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2450.0 MHz; cond = 1.84 S/m; perm = 40.0; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 10/17/2021; Ambient Temp: 24.3°C; Tissue Temp: 23.5°C

Probe: EX3DV4 - SN7660; ConvF:(8.49,8.49,8.49); Calibrated: 2021-06-28

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1677; Calibrated: 2021-06-22

Phantom: Twin-SAM V8.0; Serial: 2056

Measurement SW: DASY Module SAR V16.0.0.65

2450 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 11.4 W/kg

SAR(1 g) = 5.21 W/kg

Deviation (1 g) = -5.27%

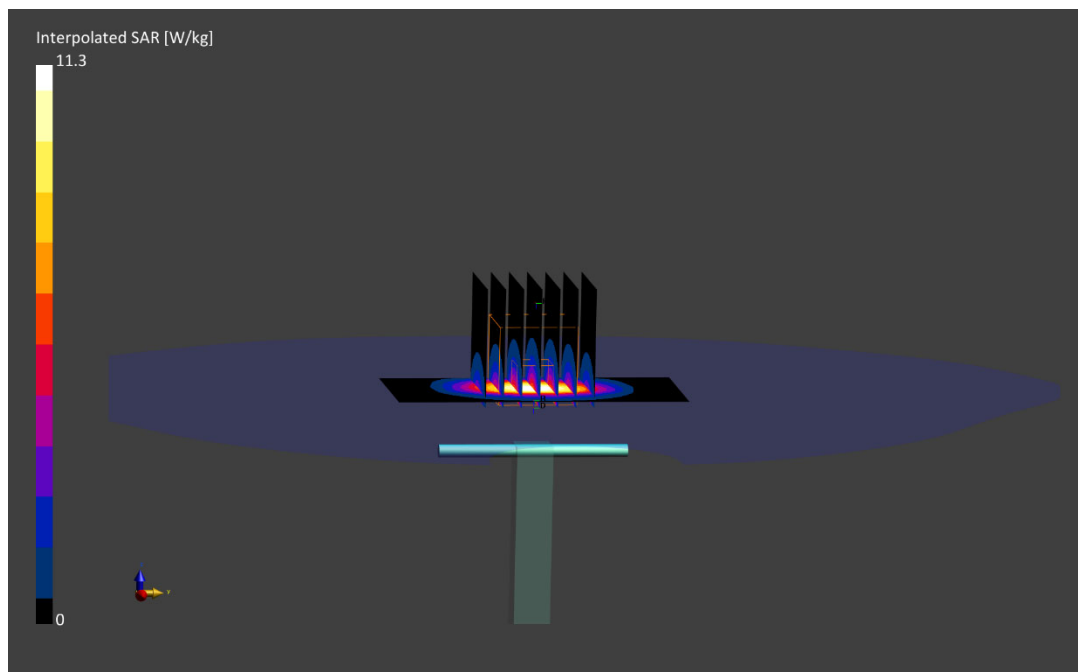

PCTEST

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN719

Communication System: UID: 0, CW; Frequency: 2450.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2450.0 MHz; cond = 1.85 S/m; perm = 37.7; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 10/25/2021; Ambient Temp: 20.5°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7571; ConvF:(7.28,7.28,7.28); Calibrated: 2020-12-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1533; Calibrated: 2020-12-07

Phantom: Twin-SAM V5.0; Serial: 1648

Measurement SW: DASY Module SAR V16.0.0.116

2450 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 11.6 W/kg

SAR(1 g) = 5.35 W/kg

Deviation (1 g) = -2.73%

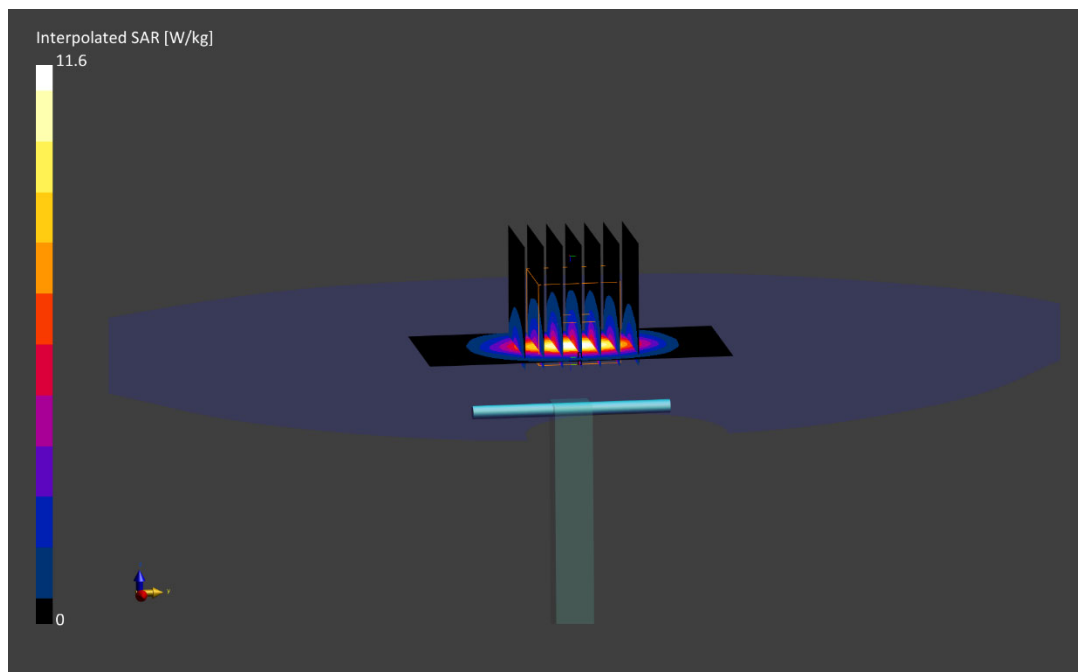

PCTEST

DUT: Dipole 2600.0 MHz; Type: D2600V2 - SN1064

Communication System: UID: 0, CW; Frequency: 2600.0 MHz
Medium: 2450 Head; Medium parameters used:
f = 2600.0 MHz; cond = 1.97 S/m; perm = 37.9; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 10/06/2021; Ambient Temp: 23°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7660; ConvF:(8.26,8.26,8.26); Calibrated: 2021-06-28
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1677; Calibrated: 2021-06-22
Phantom: Twin-SAM V8.0; Serial: 2056
Measurement SW: DASY Module SAR V16.0.0.65

2600 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 12.4 W/kg

SAR(1 g) = 5.63 W/kg

Deviation (1 g) = -3.10%

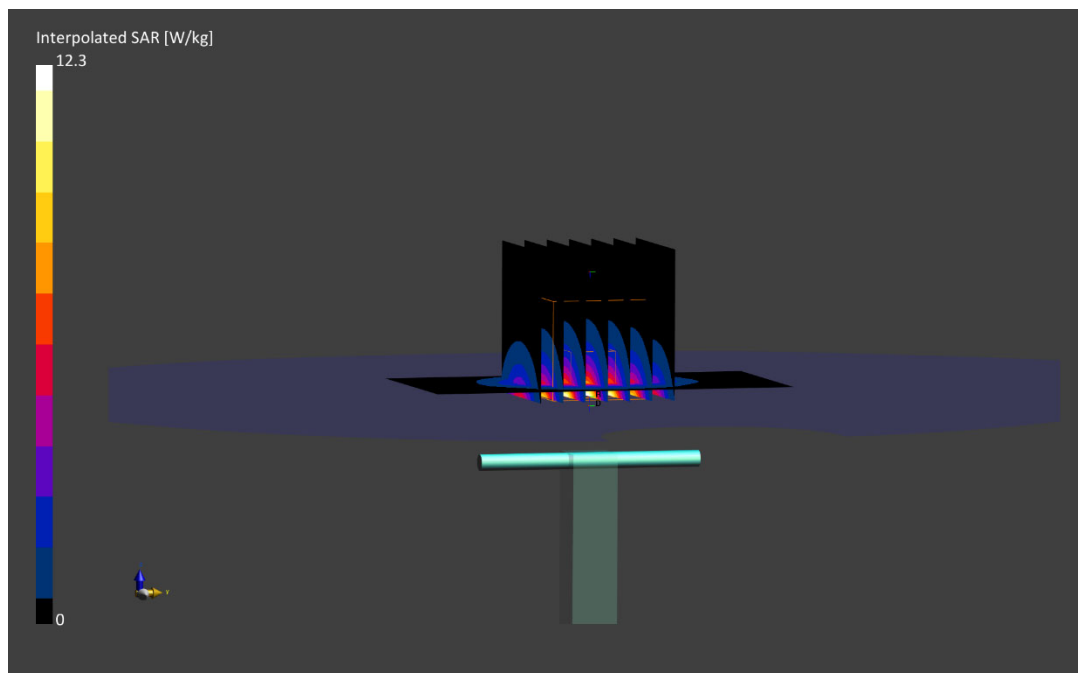

PCTEST

DUT: Dipole 2600.0 MHz; Type: D2600V2 - SN1064

Communication System: UID: 0, CW; Frequency: 2600.0 MHz
Medium: 2450 Head; Medium parameters used:
f = 2600.0 MHz; cond = 2.00 S/m; perm = 38.0; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 10/10/2021; Ambient Temp: 23.4°C; Tissue Temp: 23.2°C

Probe: EX3DV4 - SN7660; ConvF:(8.26,8.26,8.26); Calibrated: 2021-06-28
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1677; Calibrated: 2021-06-22
Phantom: Twin-SAM V8.0; Serial: 2056
Measurement SW: DASY Module SAR V16.0.0.65

2600 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 12.4 W/kg

SAR(1 g) = 5.72 W/kg

Deviation (1 g) = -1.55%

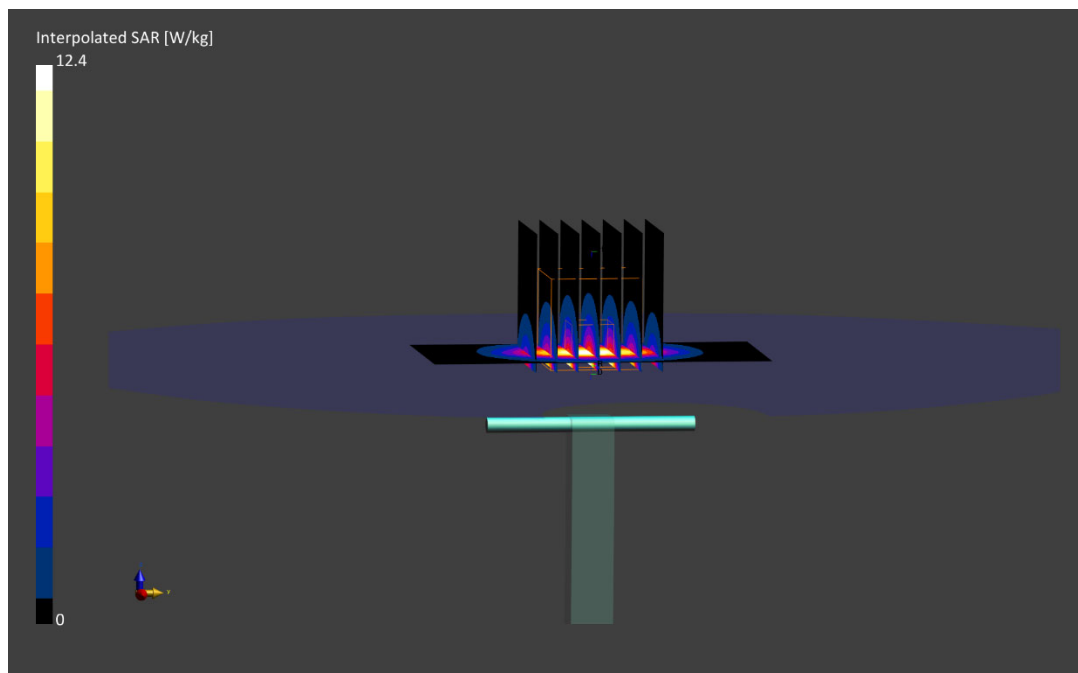

PCTEST

DUT: Dipole 2600.0 MHz; Type: D2600V2 - SN1071

Communication System: UID: 0, CW; Frequency: 2600.0 MHz
Medium: 2450 Head; Medium parameters used:
f = 2600.0 MHz; cond = 2.03 S/m; perm = 38.1; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 10/20/2021; Ambient Temp: 23.5°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7660; ConvF:(8.26,8.26,8.26); Calibrated: 2021-06-28
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1677; Calibrated: 2021-06-22
Phantom: Twin-SAM V8.0; Serial: 2056
Measurement SW: DASY Module SAR V16.0.0.65

2600 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 12.7 W/kg

SAR(1 g) = 5.55 W/kg

Deviation (1 g) = -1.07%

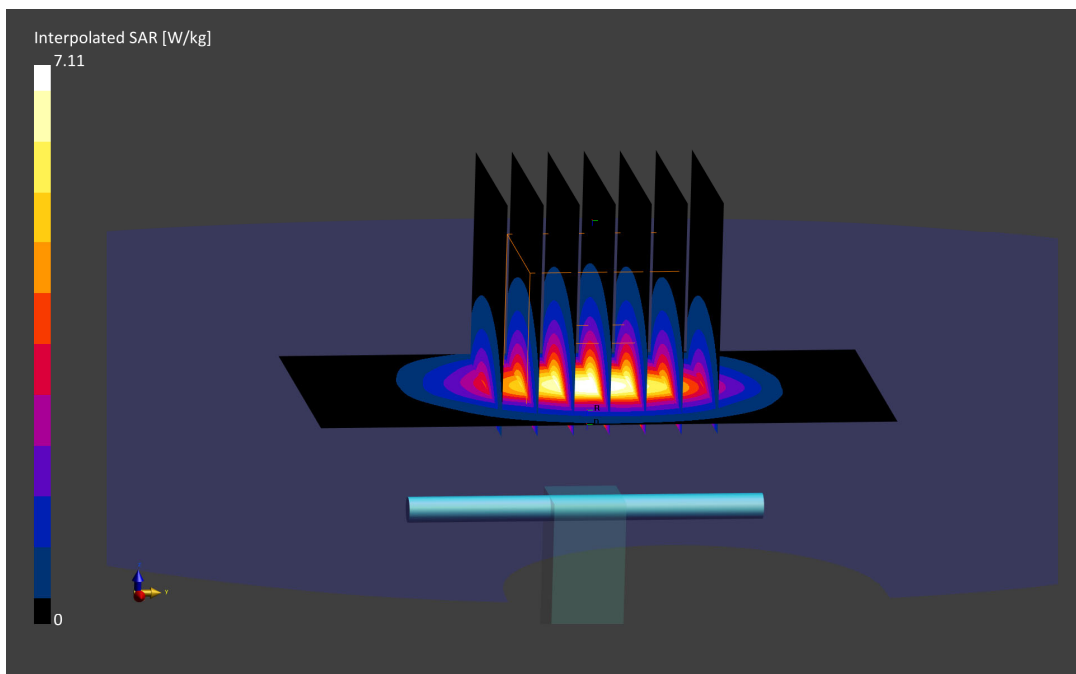

PCTEST

DUT: Dipole 2600.0 MHz; Type: D2600V2 - SN1004

Communication System: UID: 0, CW; Frequency: 2600.0 MHz
Medium: 2450 Head; Medium parameters used:
f = 2600.0 MHz; cond = 1.96 S/m; perm = 37.8; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 11/02/2021; Ambient Temp: 22.6°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN7571; ConvF:(7.05,7.05,7.05); Calibrated: 2020-12-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1533; Calibrated: 2020-12-07
Phantom: Twin-SAM V5.0; Serial: 1648
Measurement SW: DASY Module SAR V16.0.0.116

2600 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 13.1 W/kg

SAR(1 g) = 6.06 W/kg

Deviation (1 g) = 4.84%;

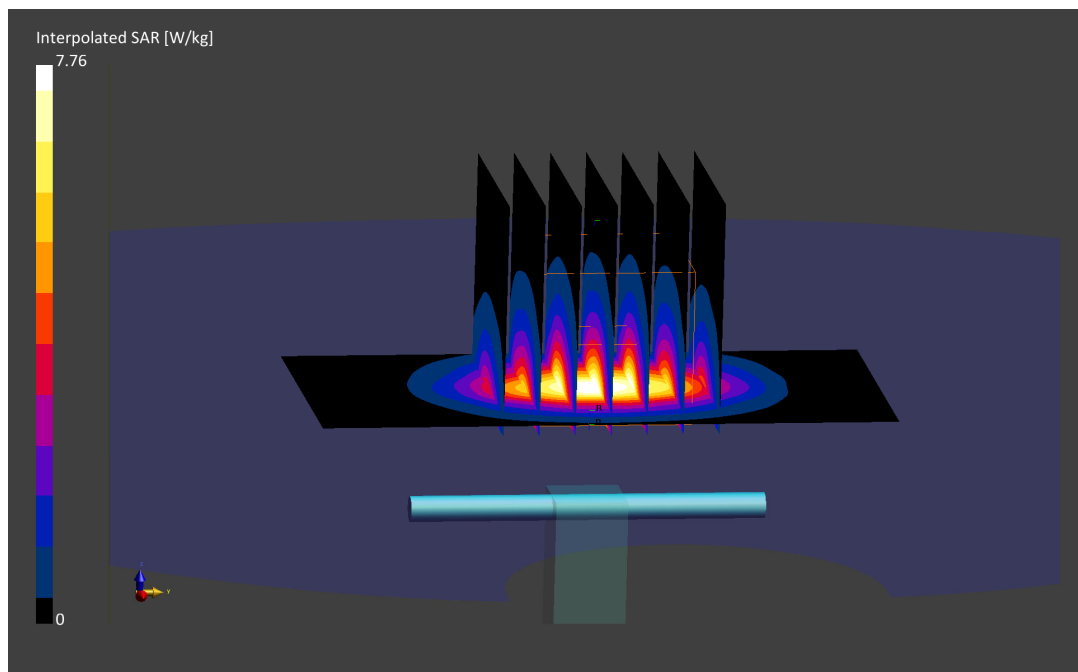

PCTEST

DUT: Dipole 3500.0 MHz; Type: D3500V2 - SN1097


Communication System: UID: 0, CW; Frequency: 3500.0 MHz
Medium: 3600 Head; Medium parameters used:
f = 3500.0 MHz; cond = 2.81 S/m; perm = 37.9; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 10/18/2021; Ambient Temp: 21.9°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7670; ConvF:(7.14,7.14,7.14); Calibrated: 2021-08-05
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1681; Calibrated: 2021-08-03
Phantom: Twin-SAM V8.0; Serial: 1630
Measurement SW: DASY Module SAR V16.0.0.116

3500 MHz System Verification at 20 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm
Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm
Peak SAR (extrapolated) = 16.6 W/kg
SAR(1 g) = 6.38 W/kg
Deviation (1 g) = -3.92%

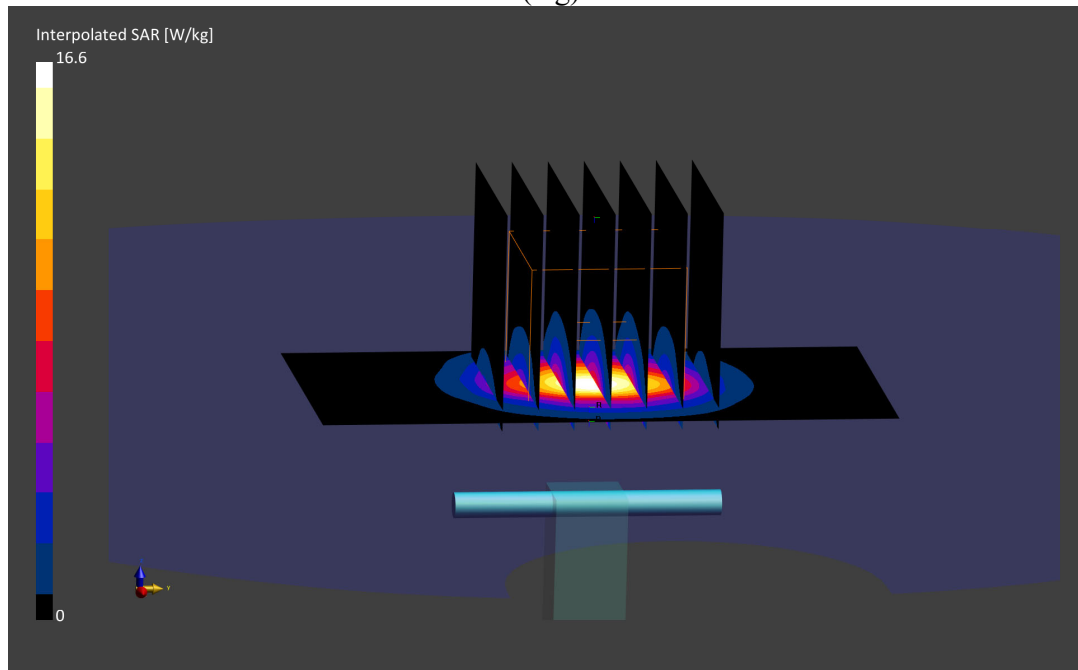

PCTEST

DUT: Dipole 3500.0 MHz; Type: D3500V2 - SN1097

Communication System: UID: 0, CW; Frequency: 3500.0 MHz
Medium: 3600 Head; Medium parameters used:
f = 3500.0 MHz; cond = 2.79 S/m; perm = 39.3; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 10/28/2021; Ambient Temp: 21.3°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7670; ConvF:(7.14,7.14,7.14); Calibrated: 2021-08-05
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1681; Calibrated: 2021-08-03
Phantom: Twin-SAM V8.0; Serial: 1630
Measurement SW: DASY Module SAR V16.0.0.116

3500 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 15.8 W/kg

SAR(1 g) = 6.25 W/kg

Deviation (1 g) = -5.87%

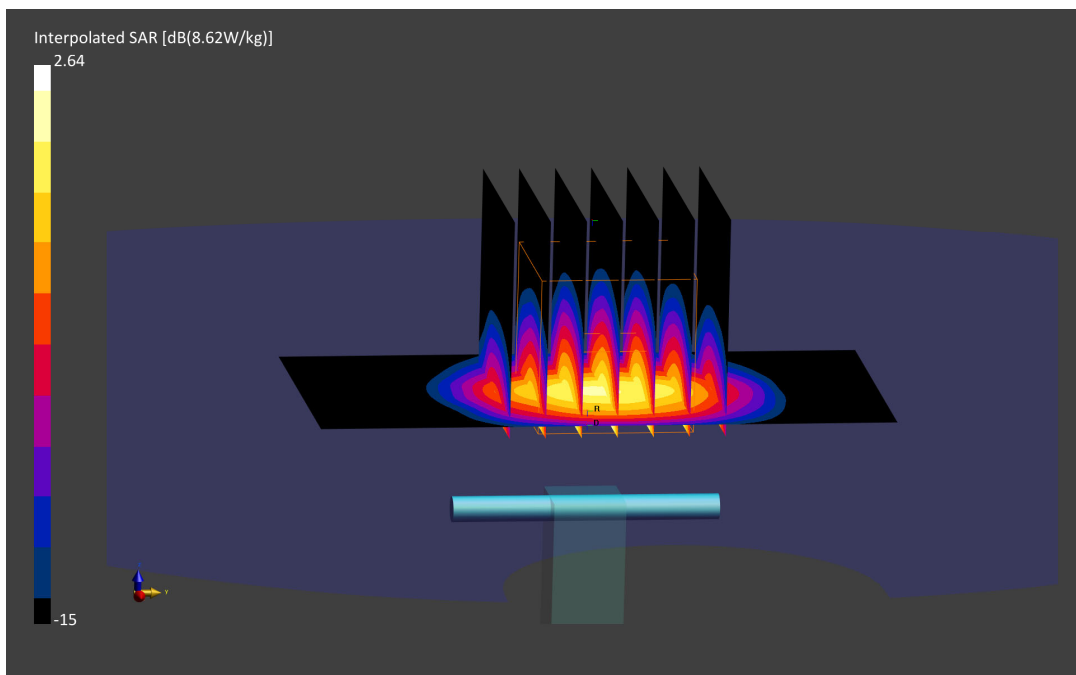

PCTEST

DUT: Dipole 3700.0 MHz; Type: D3700V2 - SN1067


Communication System: UID: 0, CW; Frequency: 3700.0 MHz
Medium: 3600 Head; Medium parameters used:
f = 3700.0 MHz; cond = 3.00 S/m; perm = 37.6; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 10/18/2021; Ambient Temp: 21.9°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7670; ConvF:(6.93,6.93,6.93); Calibrated: 2021-08-05
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1681; Calibrated: 2021-08-03
Phantom: Twin-SAM V8.0; Serial: 1630
Measurement SW: DASY Module SAR V16.0.0.116

3700 MHz System Verification at 20 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm
Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm
Peak SAR (extrapolated) = 18.7 W/kg
SAR(1 g) = 6.78 W/kg
Deviation (1 g) = 0.89%

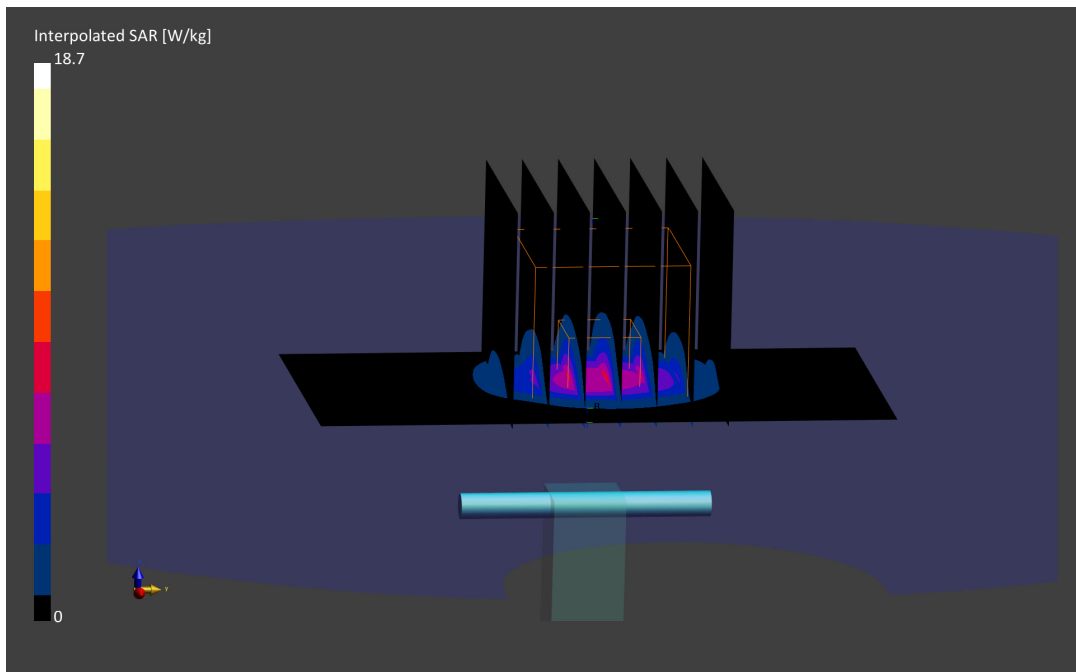

PCTEST

DUT: Dipole 3700.0 MHz; Type: D3700V2 - SN1067

Communication System: UID: 0, CW; Frequency: 3700.0 MHz
Medium: 3600 Head; Medium parameters used:
f = 3700.0 MHz; cond = 2.98 S/m; perm = 39.0; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 10/28/2021; Ambient Temp: 21.3°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7670; ConvF:(6.93,6.93,6.93); Calibrated: 2021-08-05
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1681; Calibrated: 2021-08-03
Phantom: Twin-SAM V8.0; Serial: 1630
Measurement SW: DASY Module SAR V16.0.0.116

3700 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 17.7 W/kg

SAR(1 g) = 6.79 W/kg

Deviation (1 g) = 1.04%

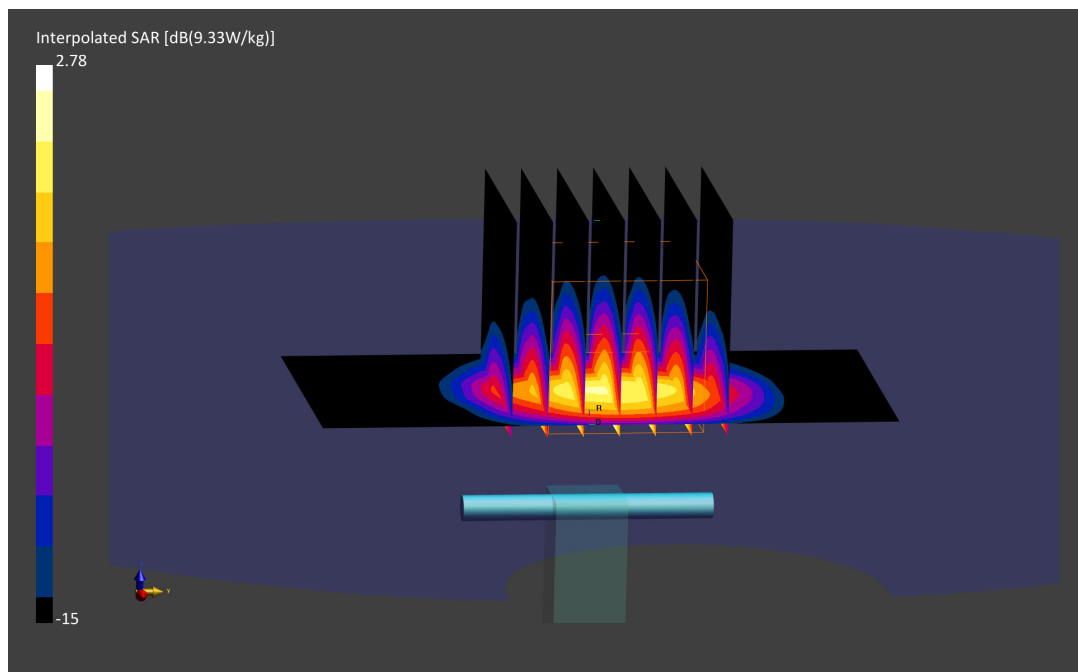

PCTEST

DUT: Dipole 3900.0 MHz; Type: D3900V2 - SN1056

Communication System: UID: 0, CW; Frequency: 3900.0 MHz
Medium: 3600 Head; Medium parameters used:
f = 3900.0 MHz; cond = 3.18 S/m; perm = 38.7; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 10/28/2021; Ambient Temp: 21.3°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7670; ConvF:(6.5,6.5,6.5); Calibrated: 2021-08-05
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1681; Calibrated: 2021-08-03
Phantom: Twin-SAM V8.0; Serial: 1630
Measurement SW: DASY Module SAR V16.0.0.116

3900 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 18.0 W/kg

SAR(1 g) = 6.86 W/kg

Deviation (1 g) = -0.44%

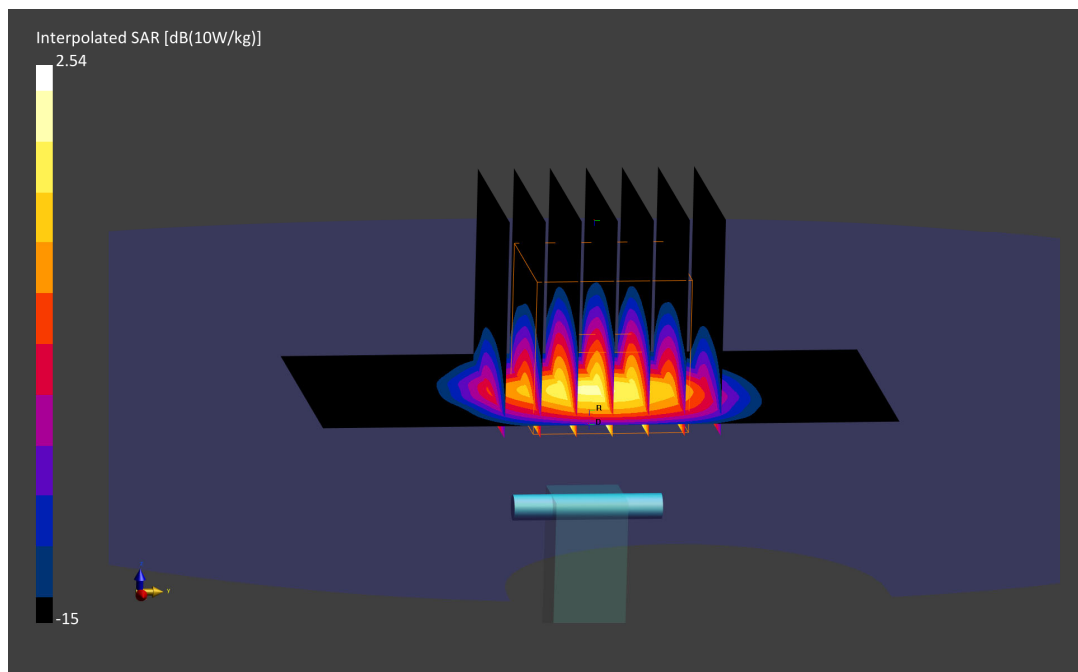

PCTEST

DUT: Dipole 5250.0 MHz; Type: D5GHzV2 - SN1057

Communication System: UID: 0, CW; Frequency: 5250.0 MHz
Medium: 5200-5800 Head; Medium parameters used:
f = 5250.0 MHz; cond = 4.52 S/m; perm = 34.7; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 10/24/2021; Ambient Temp: 19.3°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7526; ConvF:(5.45,5.45,5.45); Calibrated: 2021-03-16
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1272; Calibrated: 2021-03-18
Phantom: Twin-SAM V8.0; Serial: 2063
Measurement SW: DASY Module SAR V16.0.0.116

5250 MHz System Verification at 17 dBm (50 mW)

Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 15.0 W/kg

SAR(1 g) = 3.89 W/kg

Deviation (1 g) = -2.38%



PCTEST

DUT: Dipole 5600.0 MHz; Type: D5GHzV2 - SN1057

Communication System: UID: 0, CW; Frequency: 5600.0 MHz
Medium: 5200-5800 Head; Medium parameters used:
f = 5600.0 MHz; cond = 4.92 S/m; perm = 34.2; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 10/24/2021; Ambient Temp: 19.3°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7526; ConvF:(4.92,4.92,4.92); Calibrated: 2021-03-16
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1272; Calibrated: 2021-03-18
Phantom: Twin-SAM V8.0; Serial: 2063
Measurement SW: DASY Module SAR V16.0.0.116

5600 MHz System Verification at 17 dBm (50 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 15.9 W/kg

SAR(1 g) = 3.82 W/kg

Deviation (1 g) = -8.83%

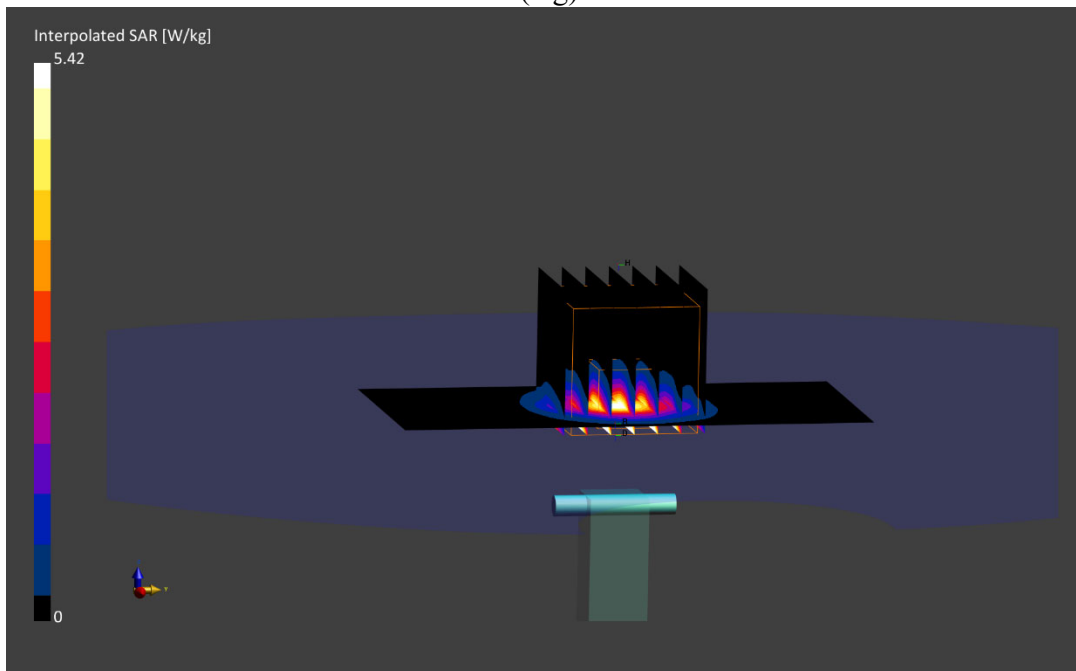

PCTEST

DUT: Dipole 5750.0 MHz; Type: D5GHzV2 - SN1057

Communication System: UID: 0, CW; Frequency: 5750.0 MHz
Medium: 5200-5800 Head; Medium parameters used:
f = 5750.0 MHz; cond = 5.08 S/m; perm = 33.9; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 10/24/2021; Ambient Temp: 19.3°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7526; ConvF:(5.01,5.01,5.01); Calibrated: 2021-03-16
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1272; Calibrated: 2021-03-18
Phantom: Twin-SAM V8.0; Serial: 2063
Measurement SW: DASY Module SAR V16.0.0.116

5750 MHz System Verification at 17 dBm (50 mW)

Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 15.2 W/kg

SAR(1 g) = 3.62 W/kg

Deviation (1 g) = -9.61%



PCTEST

DUT: Dipole 5800.0 MHz; Type: D5GHzV2 - SN1191

Communication System: UID: 0, CW; Frequency: 5800.0 MHz
Medium: 5200-5800 Head; Medium parameters used:
f = 5800.0 MHz; cond = 5.39 S/m; perm = 35.0; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 11/01/2021; Ambient Temp: 22.5°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7552; ConvF:(4.58,4.58,4.58); Calibrated: 2021-09-20
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1677; Calibrated: 2021-06-22
Phantom: Twin-SAM V8.0; Serial: 2056
Measurement SW: DASY Module SAR V16.0.0.65

5800 MHz System Verification at 17 dBm (50 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 15.7 W/kg

SAR(1 g) = 3.71 W/kg

Deviation (1 g) = -6.31%

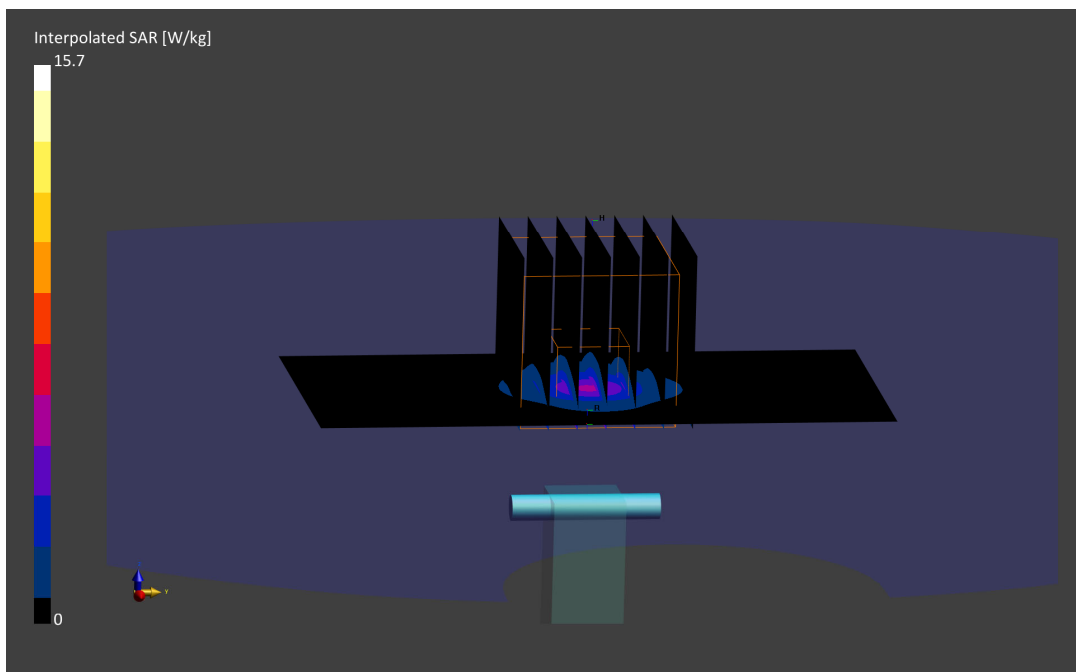

PCTEST

DUT: Dipole 750.0 MHz; Type: D750V3 - SN1161

Communication System: UID: 0, CW; Frequency: 750.0 MHz
Medium: 750 Body; Medium parameters used:
f = 750.0 MHz; cond = 0.958 S/m; perm = 54.7; density = 1000 kg/m³
Phantom Section: Flat; Space: 15 mm


Test Date: 09/20/2021; Ambient Temp: 23.0°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7571; ConvF:(10.24,10.24,10.24); Calibrated: 2020-12-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1533; Calibrated: 2020-12-07
Phantom: Twin-SAM V5.0; Serial: 1648
Measurement SW: cDASY6 Module SAR V16.0.0.116

750.0 MHz System Verification at 23.0 dBm (200 mW)

Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 2.89 W/kg
SAR(1 g) = 1.80 W/kg
Deviation (1 g) = 6.76%

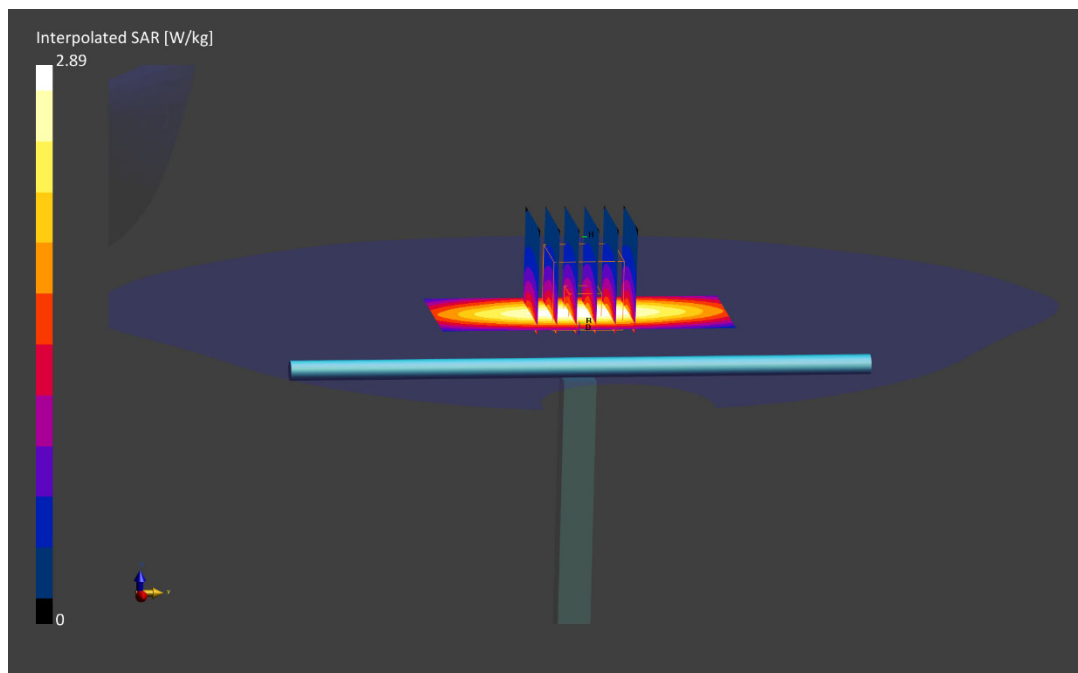

PCTEST

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1046

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used:

$f = 750 \text{ MHz}$; $\sigma = 0.99 \text{ S/m}$; $\epsilon_r = 54.065$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10/06/2021; Ambient Temp: 21.0°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7565; ConvF(9.77, 9.77, 9.77) @ 750 MHz; Calibrated: 11/12/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1466; Calibrated: 11/6/2020

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1626

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.72 W/kg

SAR(1 g) = 1.77 W/kg

Deviation(1 g) = 0.68%

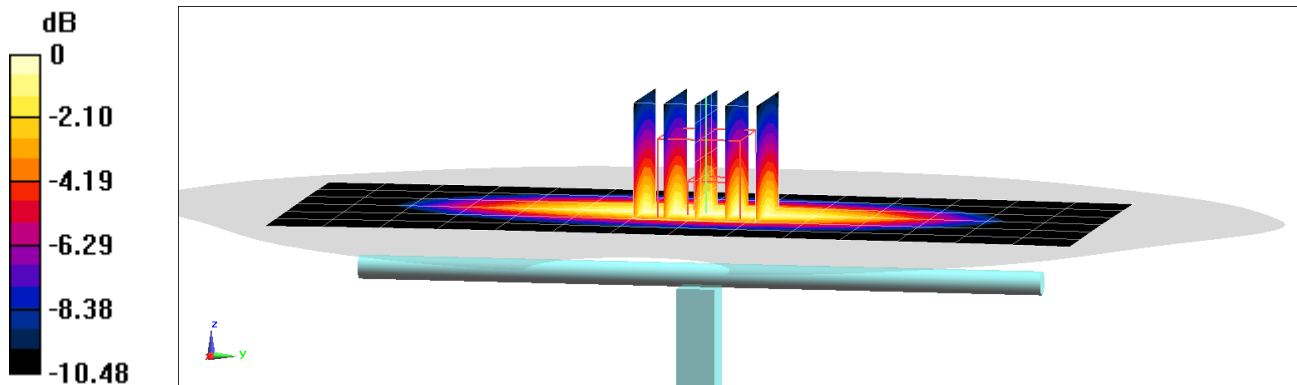

0 dB = 2.38 W/kg = 3.77 dBW/kg

PCTEST

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1046

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1
Medium: 750 Body Medium parameters used:
 $f = 750 \text{ MHz}$; $\sigma = 0.976 \text{ S/m}$; $\epsilon_r = 54.44$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10/07/2021; Ambient Temp: 21.5°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7565; ConvF(9.77, 9.77, 9.77) @ 750 MHz; Calibrated: 11/12/2020
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1466; Calibrated: 11/6/2020
Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1626
Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.49 W/kg

SAR(1 g) = 1.65 W/kg

Deviation(1 g) = -6.14%

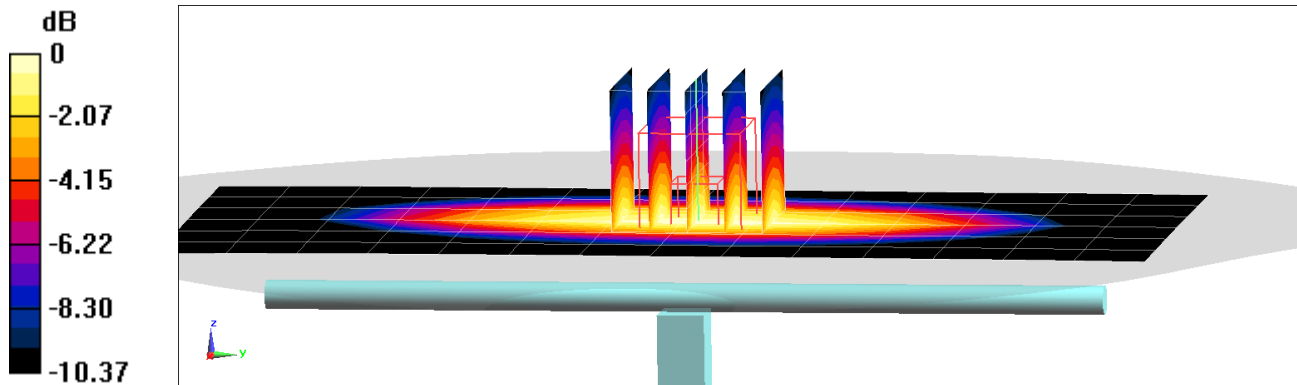

0 dB = 2.21 W/kg = 3.44 dBW/kg

PCTEST

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1054

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used:

$f = 750 \text{ MHz}$; $\sigma = 0.956 \text{ S/m}$; $\epsilon_r = 53.878$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10/17/2021; Ambient Temp: 21.5°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7409; ConvF(9.96, 9.96, 9.96) @ 750 MHz; Calibrated: 6/21/2021

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/15/2021

Phantom: Twin-SAM V5.0 Front (20); Type: QD 000 P40 CD; Serial: 1759

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7495)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.81 W/kg

SAR(1 g) = 1.82 W/kg

Deviation(1 g) = 3.17%

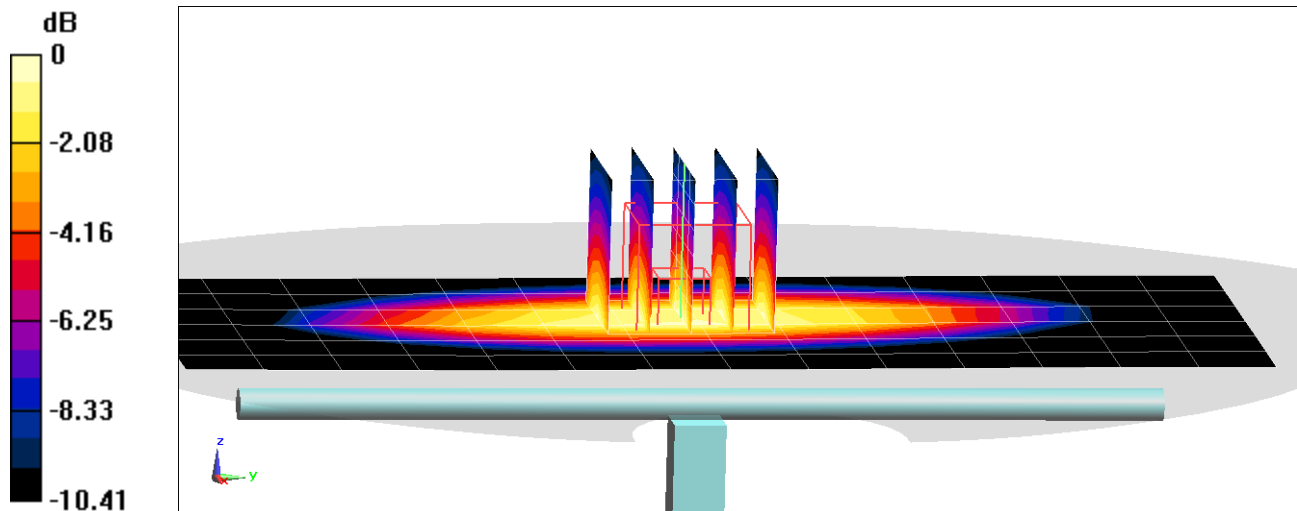

0 dB = 2.46 W/kg = 3.91 dBW/kg

PCTEST

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d133

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$$f = 835 \text{ MHz}; \sigma = 0.947 \text{ S/m}; \epsilon_r = 54.693; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09/20/2021; Ambient Temp: 23.5°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN7409; ConvF(9.66, 9.66, 9.66) @ 835 MHz; Calibrated: 6/21/2021

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/15/2021

Phantom: Twin-SAM V5.0 Front (20); Type: QD 000 P40 CD; Serial: 1759

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7495)


835 MHz System Verification at 23.0 dBm (200 mW)

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 3.02 W/kg

SAR(1 g) = 1.99 W/kg
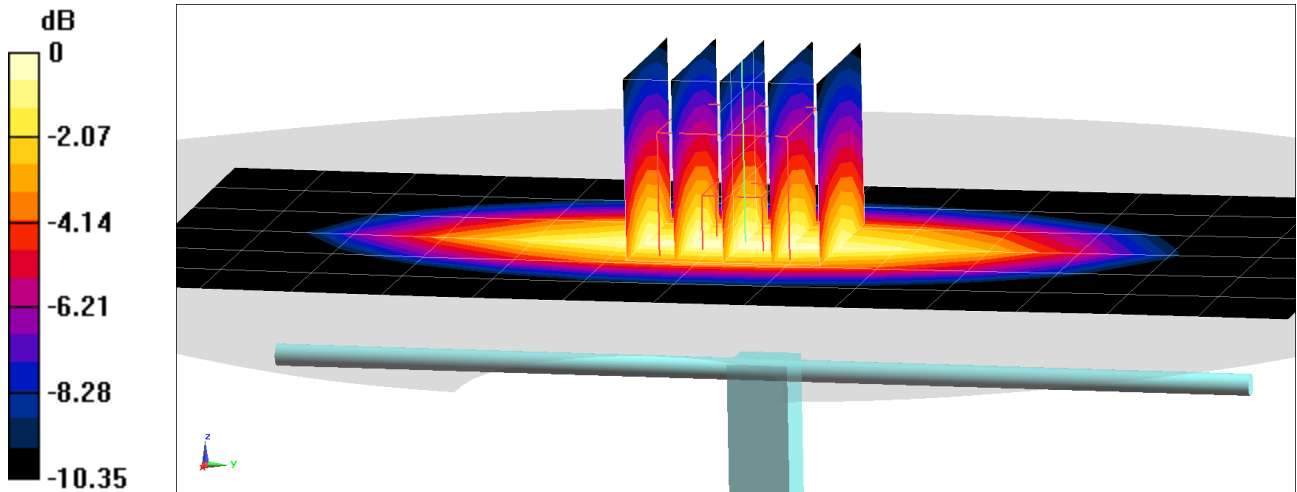
$$\text{Deviation}(1 \text{ g}) = 2.05\%$$

$$0 \text{ dB} = 2.67 \text{ W/kg} = 4.27 \text{ dBW/kg}$$

PCTEST

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d119

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 1.015 \text{ S/m}$; $\epsilon_r = 54.779$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09/27/2021; Ambient Temp: 20.5°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7565; ConvF(9.53, 9.53, 9.53) @ 835 MHz; Calibrated: 11/12/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1466; Calibrated: 11/6/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1626

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 3.12 W/kg

SAR(1 g) = 2.08 W/kg

Deviation(1 g) = 5.05%

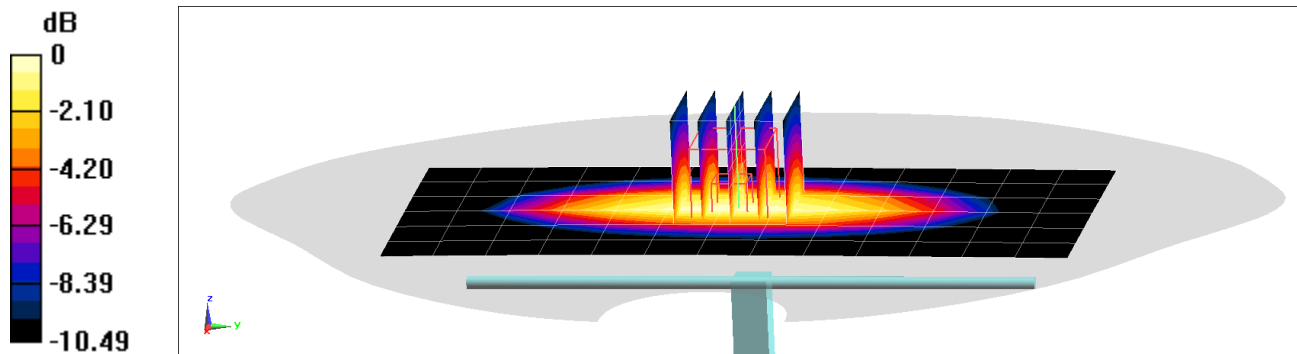

0 dB = 2.78 W/kg = 4.44 dBW/kg

PCTEST

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d119

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 1.005 \text{ S/m}$; $\epsilon_r = 53.24$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09/29/2021; Ambient Temp: 20.5°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7565; ConvF(9.53, 9.53, 9.53) @ 835 MHz; Calibrated: 11/12/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1466; Calibrated: 11/6/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1626

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 3.06 W/kg

SAR(1 g) = 2.03 W/kg

Deviation(1 g) = 2.53%

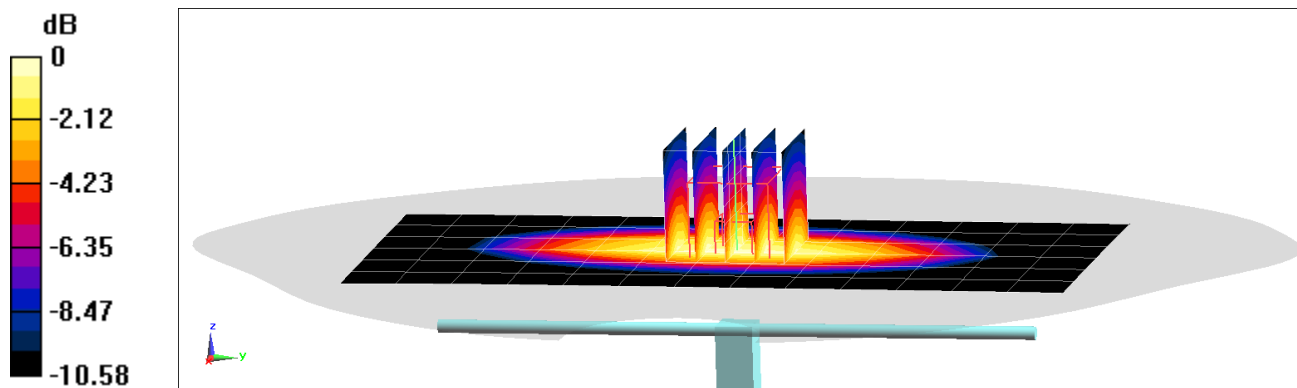

0 dB = 2.71 W/kg = 4.33 dBW/kg

PCTEST

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d180

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 1.011 \text{ S/m}$; $\epsilon_r = 52.832$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09/29/2021; Ambient Temp: 21.9°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7402; ConvF(10.04, 10.04, 10.04) @ 835 MHz; Calibrated: 04/16/2021

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1502; Calibrated: 04/09/2021

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1868

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.99 W/kg

SAR(1 g) = 2.01 W/kg

Deviation(1 g) = 3.93%

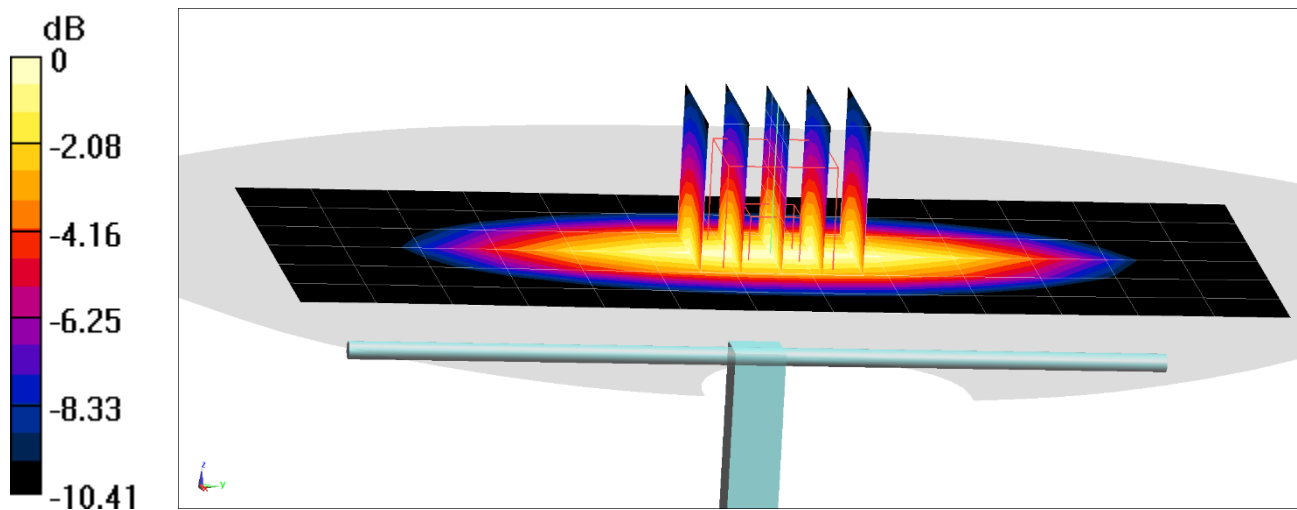

0 dB = 2.67 W/kg = 4.27 dBW/kg

PCTEST

DUT: Dipole 835 MHz Type: D835V2; Serial: 4d180

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 1.017 \text{ S/m}$; $\epsilon_r = 53.993$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10/01/2021; Ambient Temp: 20.7°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7402; ConvF(10.04, 10.04, 10.04) @ 835 MHz; Calibrated: 04/16/2021

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1502; Calibrated: 04/09/2021

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1868

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.94 W/kg

SAR(1 g) = 1.97 W/kg

Deviation(1 g) = 1.86%

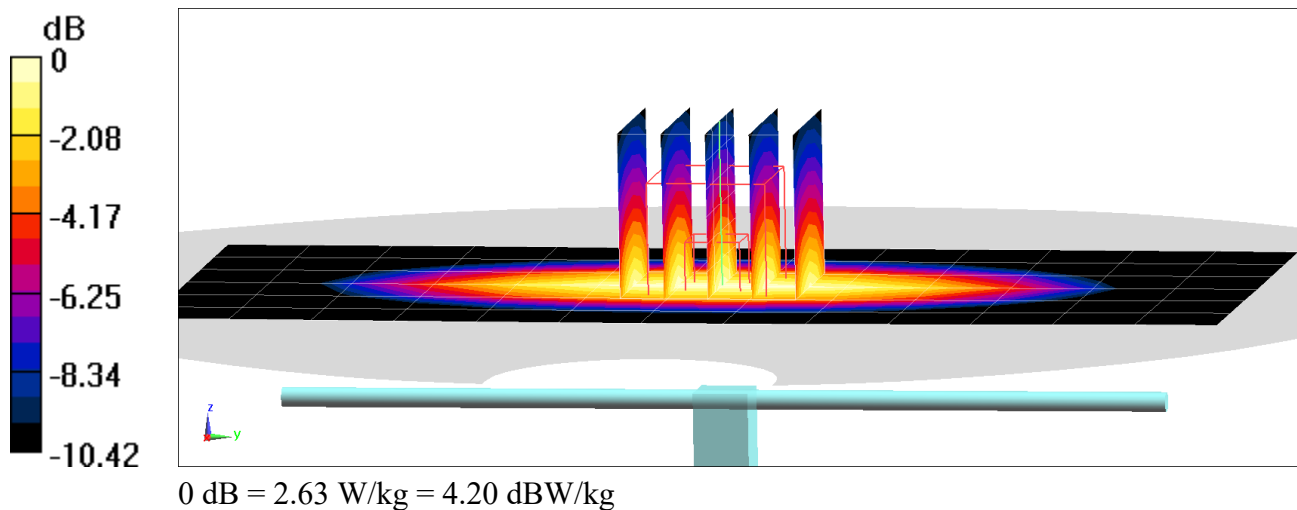

PCTEST

DUT: Dipole 835 MHz Type: D835V2; Serial: 4d180

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 1.017 \text{ S/m}$; $\epsilon_r = 54.166$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10/04/2021; Ambient Temp: 21.4°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7402; ConvF(10.04, 10.04, 10.04) @ 835 MHz; Calibrated: 04/16/2021

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1502; Calibrated: 04/09/2021

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1868

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.96 W/kg

SAR(1 g) = 1.97 W/kg

Deviation(1 g) = 1.86%

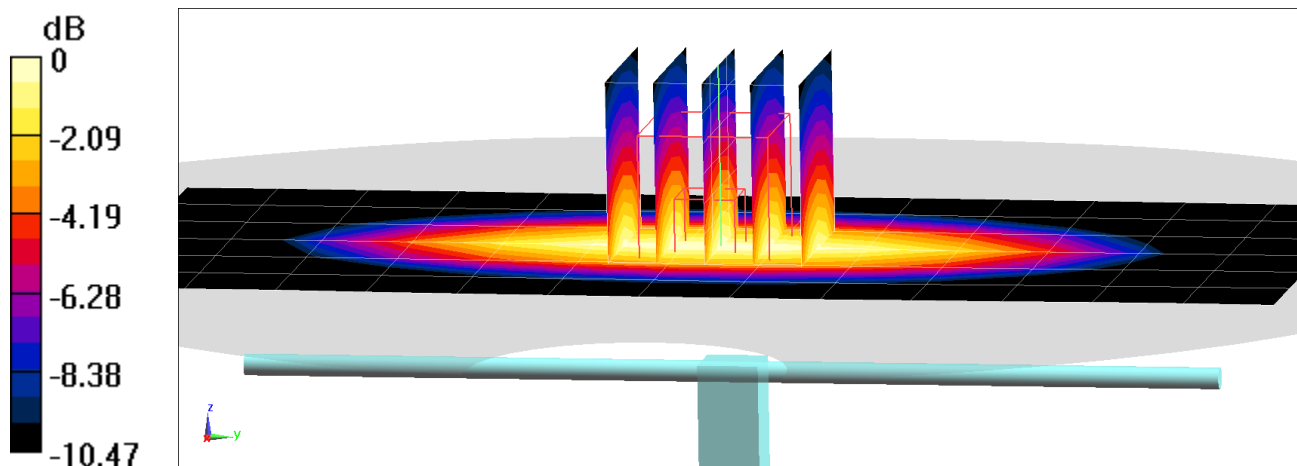

PCTEST

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.953 \text{ S/m}$; $\epsilon_r = 54.827$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10/05/2021; Ambient Temp: 21.1°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7409; ConvF(9.66, 9.66, 9.66) @ 835 MHz; Calibrated: 6/21/2021

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/15/2021

Phantom: Twin-SAM V5.0 Front (20); Type: QD 000 P40 CD; Serial: 1759

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7495)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 3.11 W/kg

SAR(1 g) = 2.02 W/kg

Deviation(1 g) = 2.96%

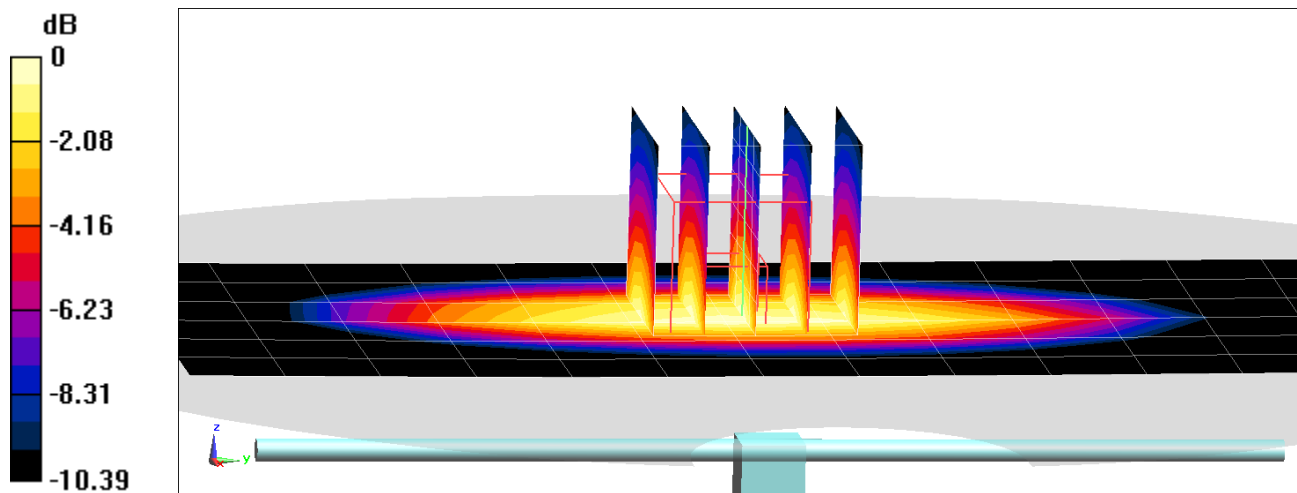

0 dB = 2.72 W/kg = 4.35 dBW/kg

PCTEST

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1148

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.497 \text{ S/m}$; $\epsilon_r = 52.657$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09/12/2021; Ambient Temp: 22.4°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7357; ConvF(8.12, 8.12, 8.12) @ 1750 MHz; Calibrated: 4/19/2021

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/7/2021

Phantom: Twin-SAM V5.0 Front (20); Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7495)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.13 W/kg

SAR(1 g) = 3.93 W/kg; SAR(10 g) = 2.08 W/kg

Deviation(1 g) = 8.26%; Deviation(10 g) = 7.77%

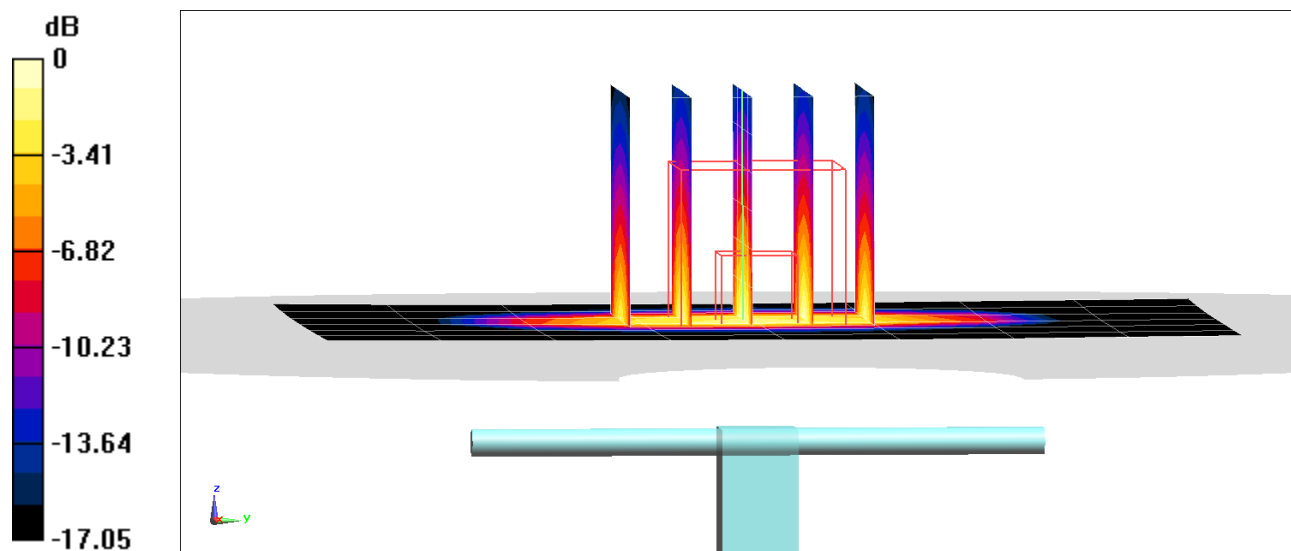

0 dB = 6.04 W/kg = 7.81 dBW/kg

PCTEST

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1150

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.495 \text{ S/m}$; $\epsilon_r = 51.545$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09/14/2021; Ambient Temp: 24.4°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7357; ConvF(8.12, 8.12, 8.12) @ 1750 MHz; Calibrated: 4/19/2021

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/7/2021

Phantom: Twin-SAM V5.0 Front (20); Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7495)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.88 W/kg

SAR(1 g) = 3.76 W/kg

Deviation(1 g) = 2.73%

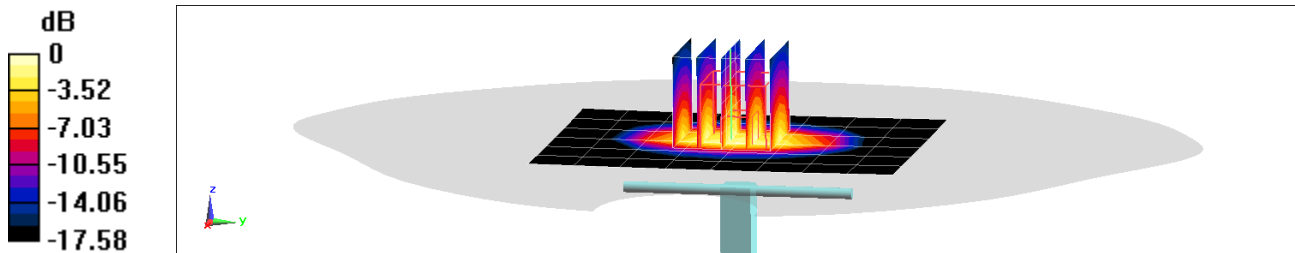

0 dB = 5.76 W/kg = 7.60 dBW/kg

PCTEST

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1150

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.465 \text{ S/m}$; $\epsilon_r = 52.496$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09/19/2021; Ambient Temp: 24.2°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7357; ConvF(8.12, 8.12, 8.12) @ 1750 MHz; Calibrated: 4/19/2021

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/7/2021

Phantom: Twin-SAM V5.0 Front (20); Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7495)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.17 W/kg

SAR(10 g) = 2.09 W/kg

Deviation(10 g) = 7.73%

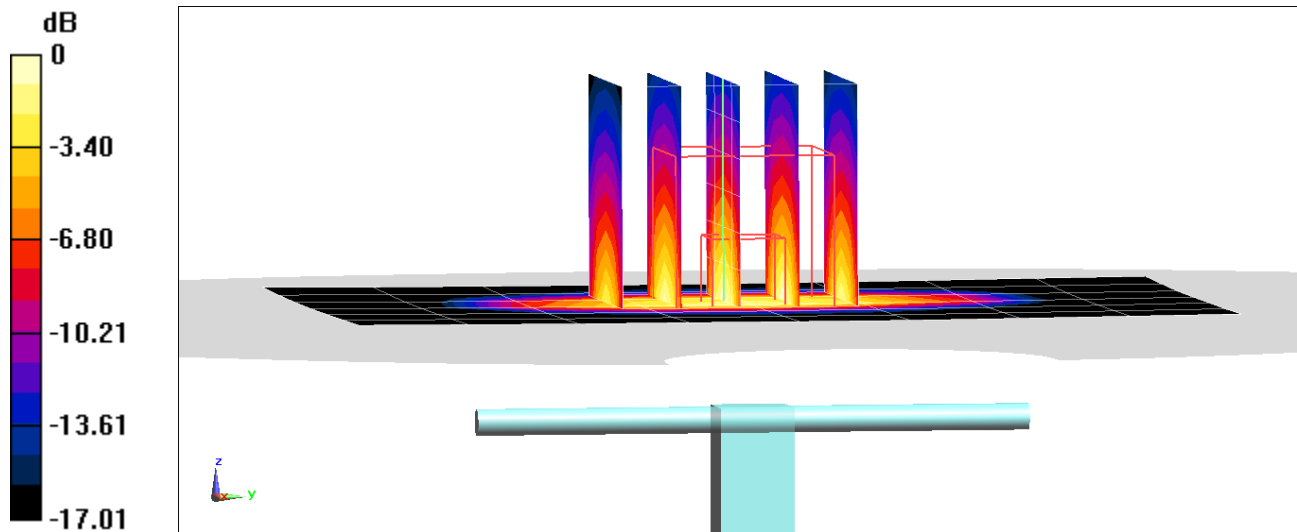

PCTEST

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1150

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.468 \text{ S/m}$; $\epsilon_r = 52.211$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10/04/2021; Ambient Temp: 22.3°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3589; ConvF(7, 7, 7) @ 1750 MHz; Calibrated: 1/20/2021

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2021

Phantom: Twin-SAM V5.0 front (30); Type: QD 000 P40 CD; Serial: 1646

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7495)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 6.78 W/kg

SAR(1 g) = 3.75 W/kg

Deviation(1 g) = 2.46%

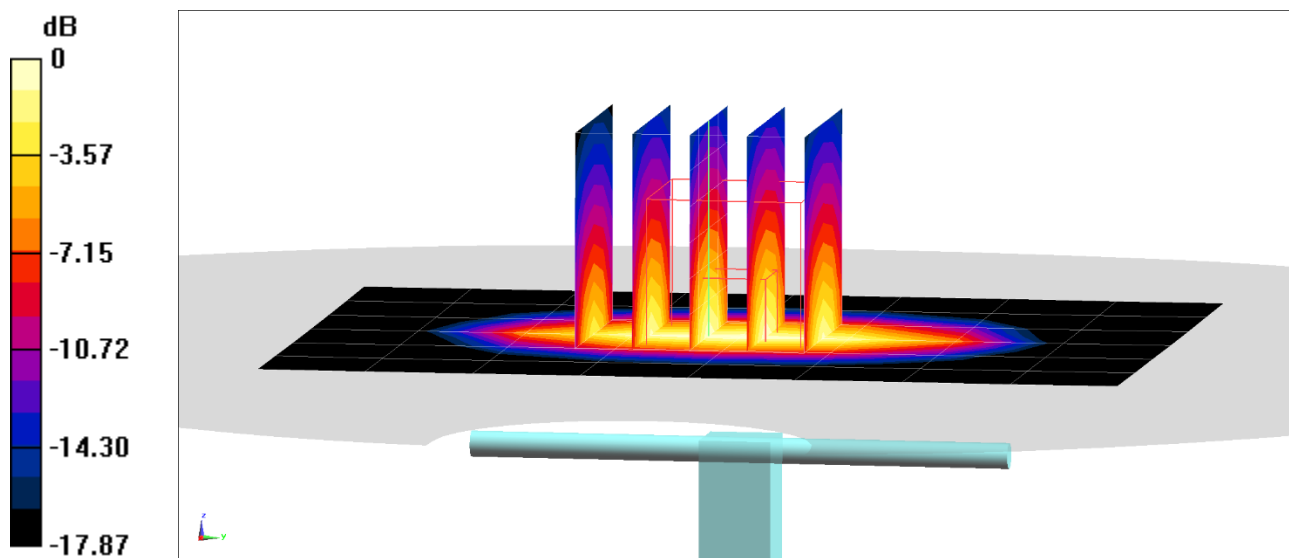

PCTEST

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1148

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.515 \text{ S/m}$; $\epsilon_r = 52.703$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10/19/2021; Ambient Temp: 23.5°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7357; ConvF(8.12, 8.12, 8.12) @ 1750 MHz; Calibrated: 4/19/2021

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/7/2021

Phantom: Twin-SAM V5.0 Front (20); Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7495)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.05 W/kg

SAR(1 g) = 3.9 W/kg; SAR(10 g) = 2.07 W/kg

Deviation(1 g) = 7.44%; Deviation(10 g) = 7.25%

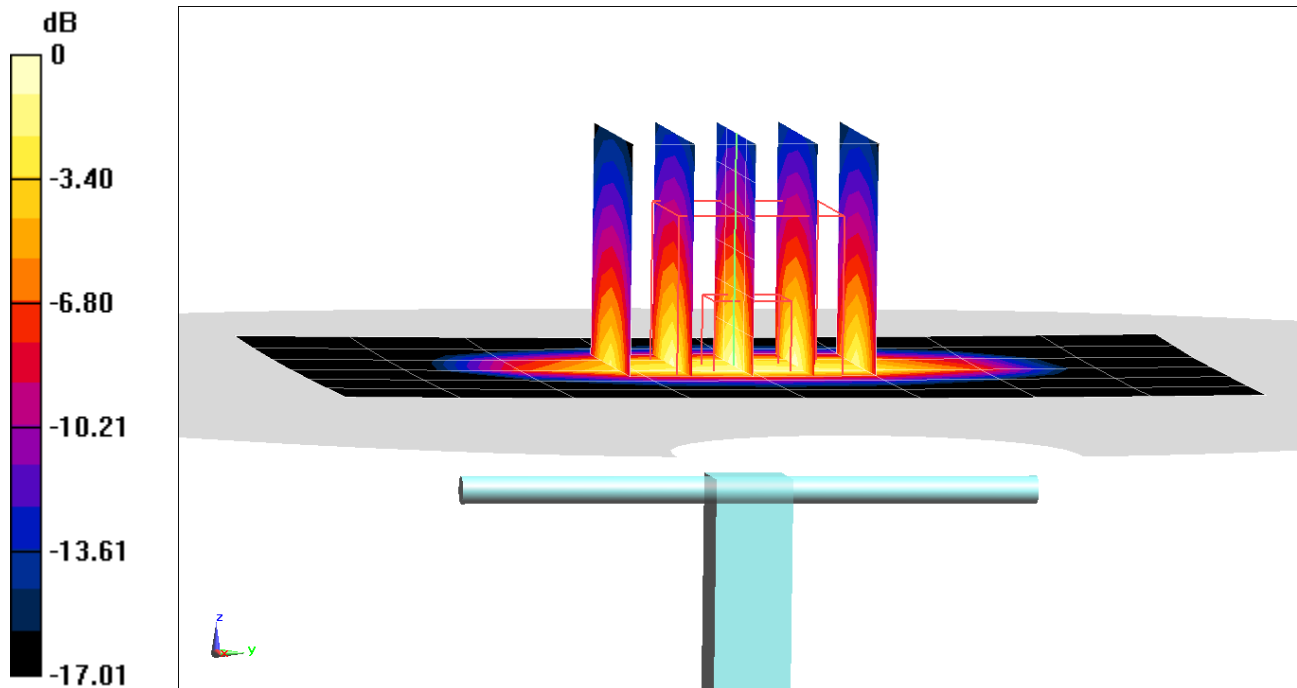

0 dB = 5.94 W/kg = 7.74 dBW/kg

PCTEST

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1148

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.496 \text{ S/m}$; $\epsilon_r = 54.264$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10/28/2021; Ambient Temp: 22.8°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7357; ConvF(8.12, 8.12, 8.12) @ 1750 MHz; Calibrated: 4/19/2021

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/7/2021

Phantom: Twin-SAM V5.0 Front (20); Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7495)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 6.88 W/kg

SAR(1 g) = 3.85 W/kg

Deviation(1 g) = 6.06%

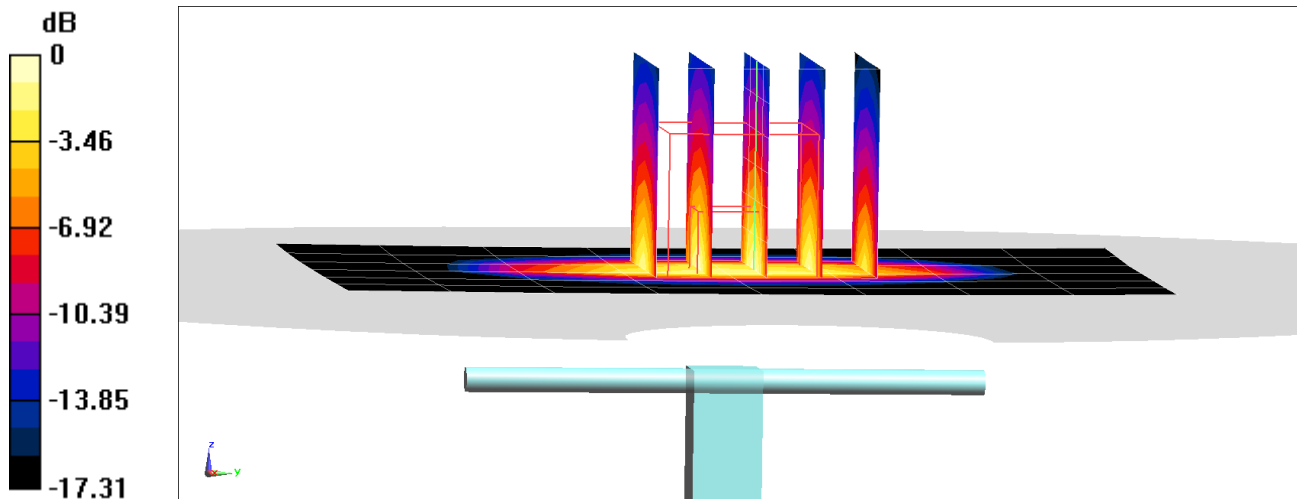

0 dB = 5.80 W/kg = 7.63 dBW/kg

PCTEST

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1900 \text{ MHz}$; $\sigma = 1.583 \text{ S/m}$; $\epsilon_r = 51.285$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09/16/2021; Ambient Temp: 22.2°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7410; ConvF(7.7, 7.7, 7.7) @ 1900 MHz; Calibrated: 7/20/2021

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1583; Calibrated: 7/13/2021

Phantom: Twin-SAM V5.0 (Front); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7495)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.74 W/kg

SAR(1 g) = 4.16 W/kg

Deviation(1 g) = 6.39%

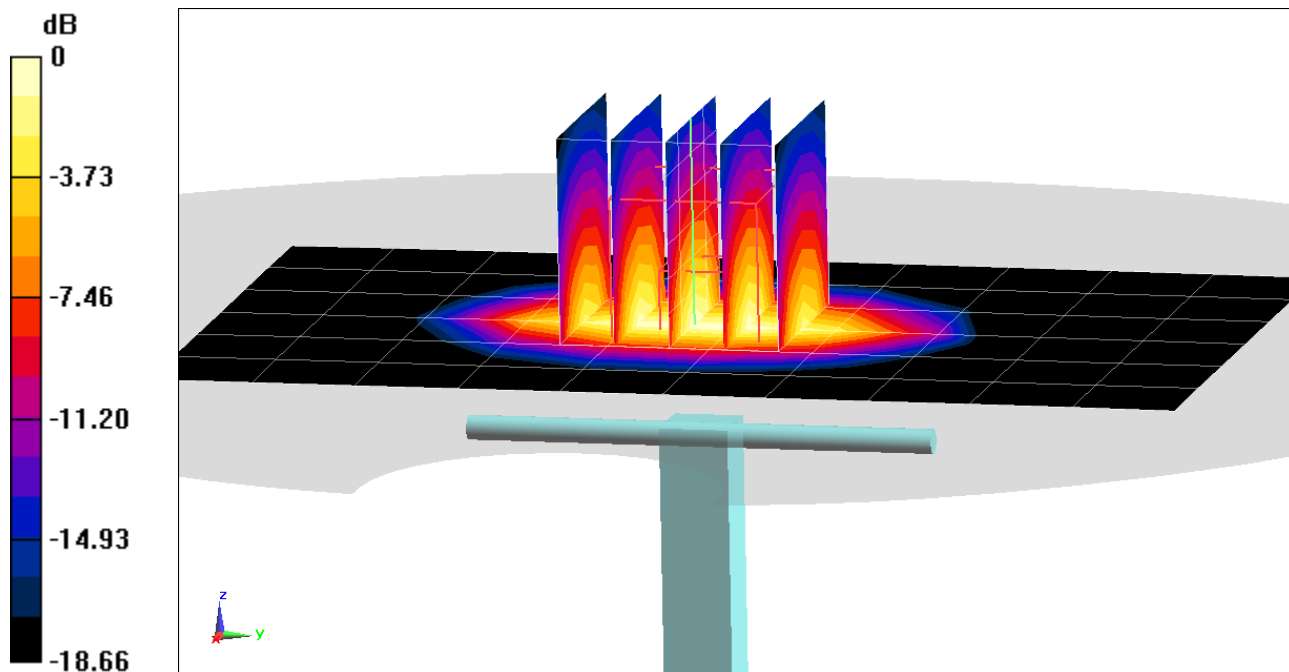

0 dB = 6.45 W/kg = 8.10 dBW/kg

PCTEST

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1900 \text{ MHz}$; $\sigma = 1.536 \text{ S/m}$; $\epsilon_r = 51.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09/20/2021; Ambient Temp: 21.0°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7410; ConvF(7.7, 7.7, 7.7) @ 1900 MHz; Calibrated: 7/20/2021

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1583; Calibrated: 7/13/2021

Phantom: Twin-SAM V5.0 (Front); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7495)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.69 W/kg

SAR(1 g) = 4.16 W/kg

Deviation(1 g) = 6.39%

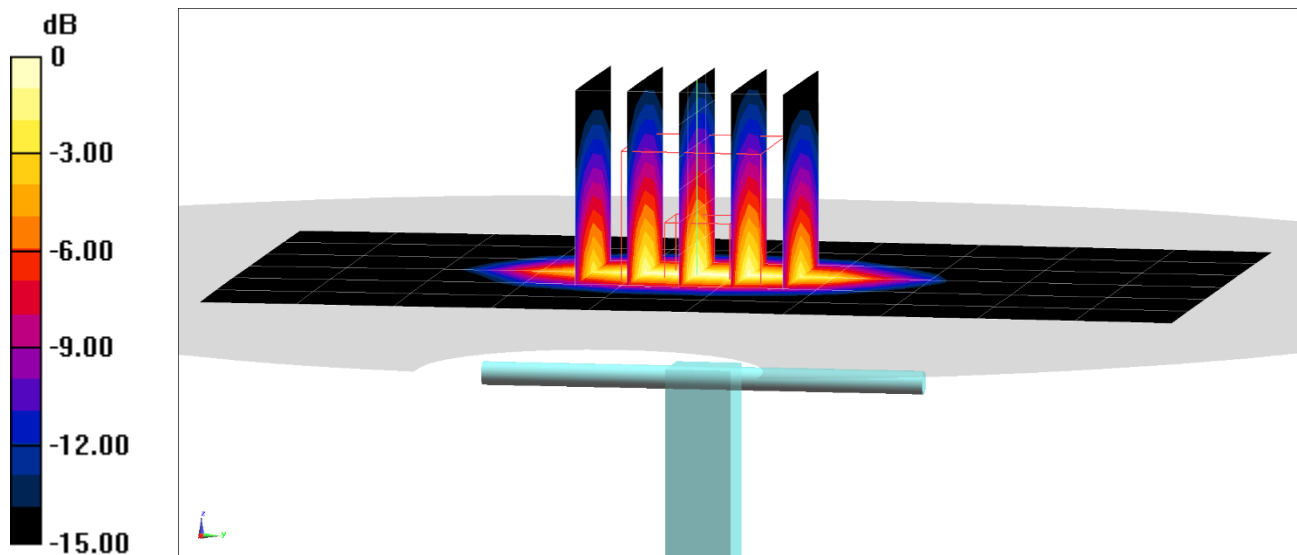

PCTEST

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1900 \text{ MHz}$; $\sigma = 1.549 \text{ S/m}$; $\epsilon_r = 53.001$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09/22/2021; Ambient Temp: 22.1°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7410; ConvF(7.7, 7.7, 7.7) @ 1900 MHz; Calibrated: 7/20/2021

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1583; Calibrated: 7/13/2021

Phantom: Twin-SAM V5.0 (Front); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7495)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.76 W/kg

SAR(10 g) = 2.16 W/kg

Deviation(10 g) = 5.37%

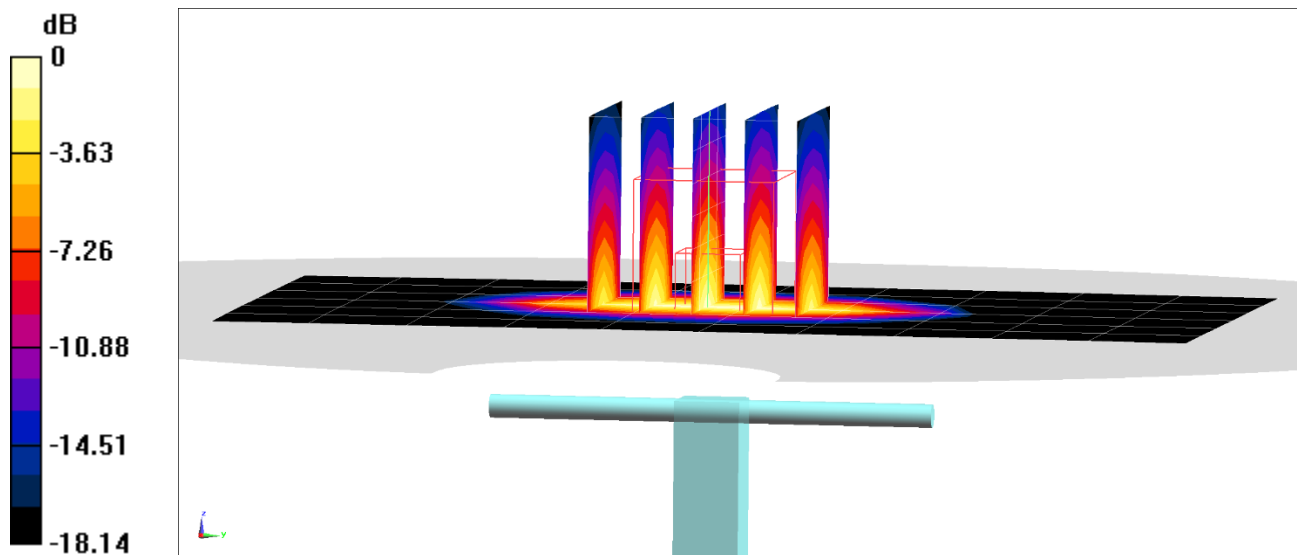

PCTEST

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1900 \text{ MHz}$; $\sigma = 1.568 \text{ S/m}$; $\epsilon_r = 51.123$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10/11/2021; Ambient Temp: 23.3°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7410; ConvF(7.7, 7.7, 7.7) @ 1900 MHz; Calibrated: 7/20/2021

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1583; Calibrated: 7/13/2021

Phantom: Twin-SAM V5.0 (Front); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7495)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.63 W/kg

SAR(1 g) = 4.14 W/kg; SAR(10 g) = 2.13 W/kg

Deviation(1 g) = 5.88%; Deviation(10 g) = 3.90%

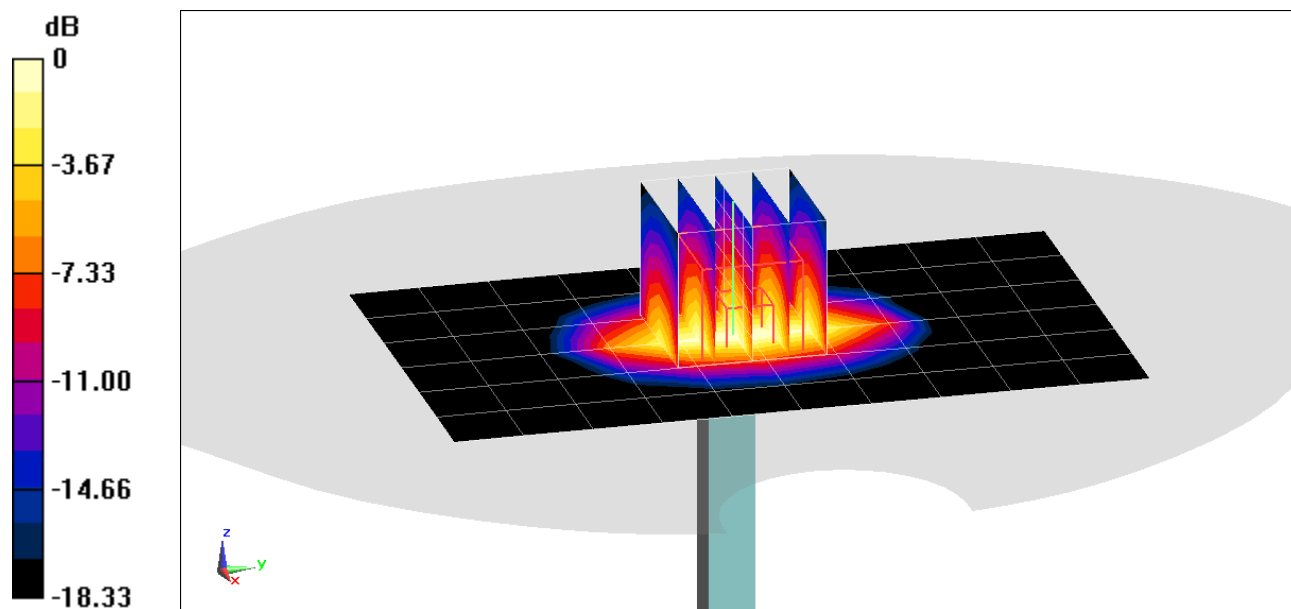

0 dB = 6.26 W/kg = 7.97 dBW/kg

PCTEST

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d080

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1900 \text{ MHz}$; $\sigma = 1.561 \text{ S/m}$; $\epsilon_r = 51.596$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10/14/2021; Ambient Temp: 23.5°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7410; ConvF(7.7, 7.7, 7.7) @ 1900 MHz; Calibrated: 7/20/2021

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1583; Calibrated: 7/13/2021

Phantom: Twin-SAM V5.0 (Front); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7495)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.67 W/kg

SAR(1 g) = 4.18 W/kg; SAR(10 g) = 2.16 W/kg

Deviation(1 g) = 6.63%; Deviation(10 g) = 4.85%

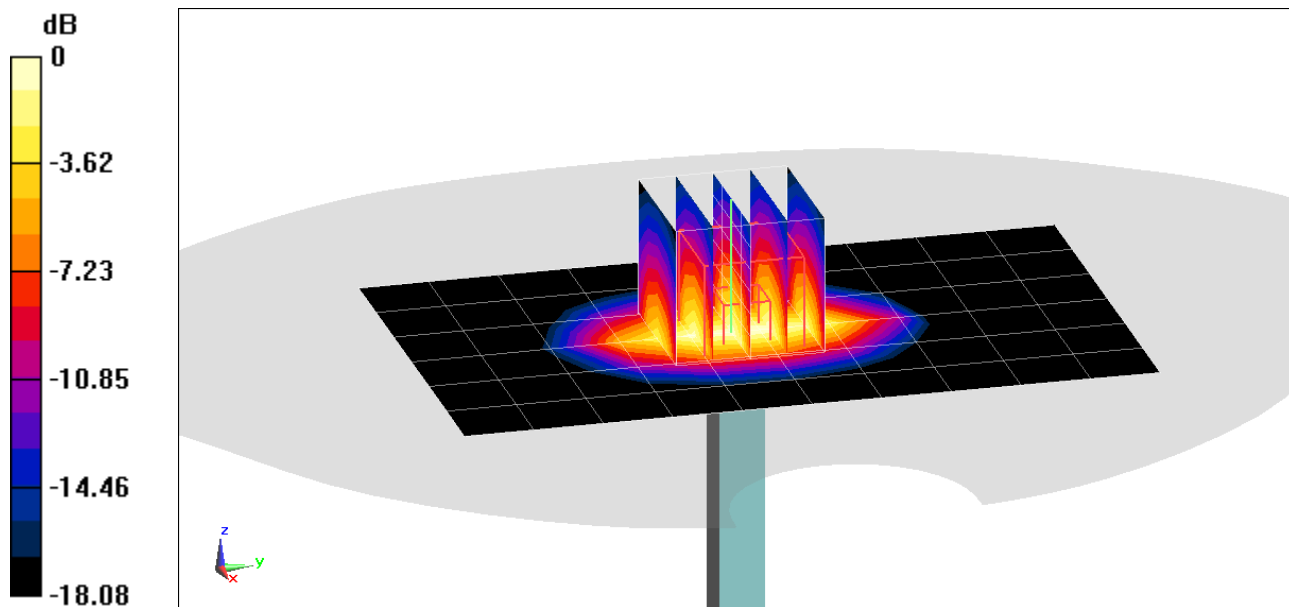

PCTEST

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used:

$f = 1900 \text{ MHz}$; $\sigma = 1.581 \text{ S/m}$; $\epsilon_r = 51.941$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10/18/2021; Ambient Temp: 23.9°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN3589; ConvF(6.84, 6.84, 6.84) @ 1900 MHz; Calibrated: 1/20/2021

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2021

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1646

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7495)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.73 W/kg

SAR(10 g) = 2.09 W/kg

Deviation(10 g) = 1.95%

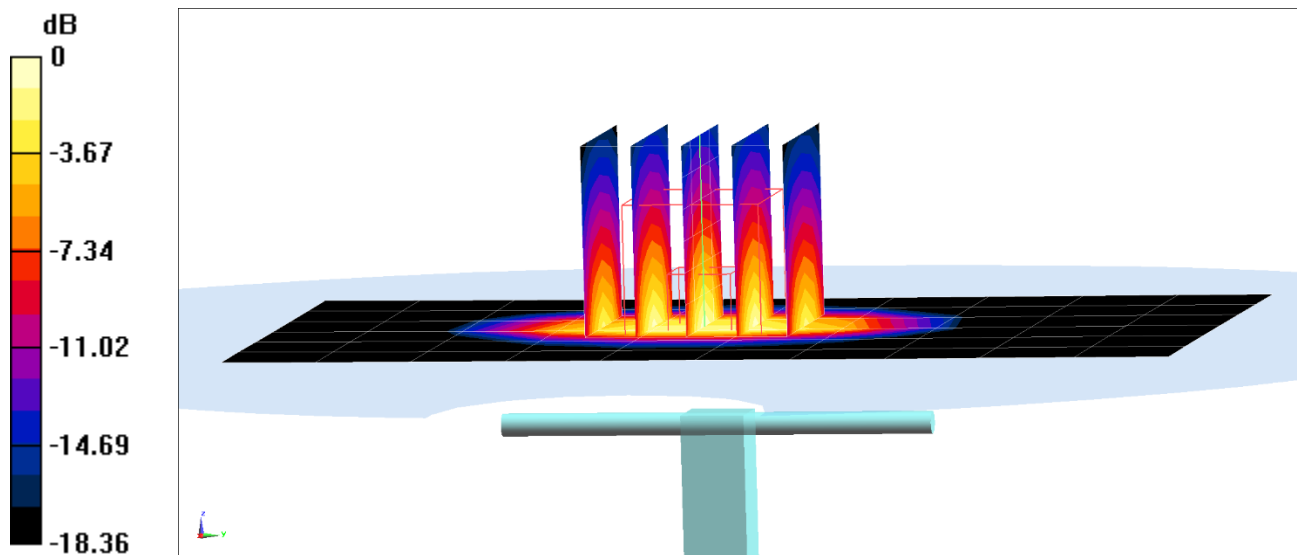

0 dB = 6.56 W/kg = 8.17 dBW/kg

PCTEST

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used:

$f = 1900 \text{ MHz}$; $\sigma = 1.574 \text{ S/m}$; $\epsilon_r = 52.718$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10/20/2021; Ambient Temp: 23.1°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3589; ConvF(6.84, 6.84, 6.84) @ 1900 MHz; Calibrated: 1/20/2021

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2021

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1646

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7495)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 8.25 W/kg

SAR(1 g) = 4.35 W/kg

Deviation(1 g) = 7.67%

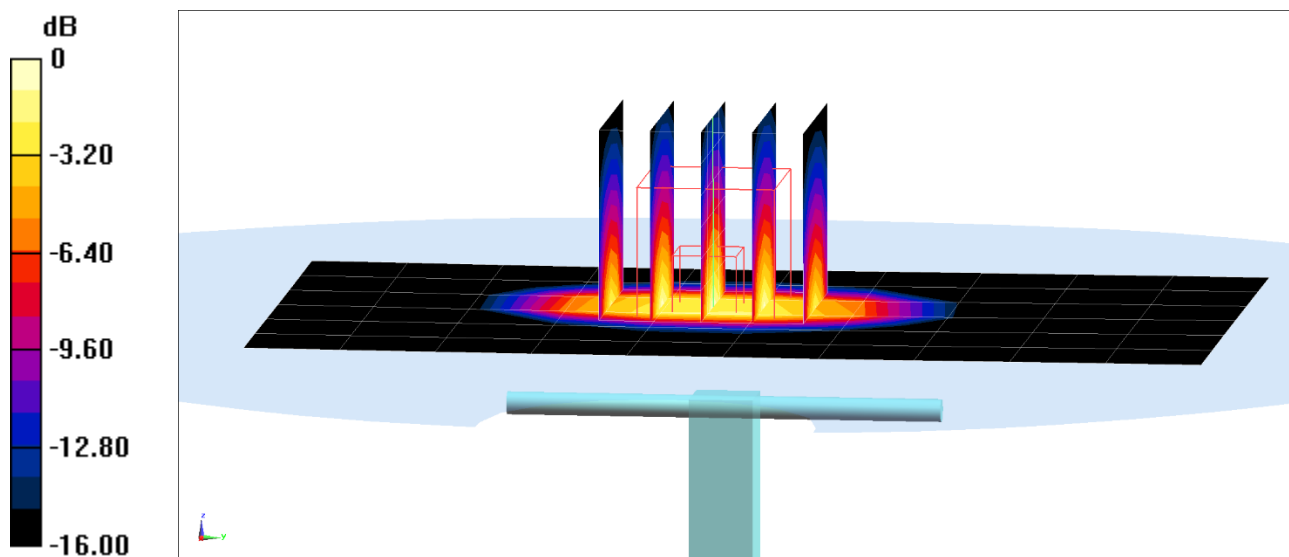

0 dB = 6.88 W/kg = 8.38 dBW/kg

PCTEST

DUT: Dipole 2300.0 MHz; Type: D2300V2 - SN1116

Communication System: UID: 0, CW; Frequency: 2300.0 MHz
Medium: 2450 Body; Medium parameters used:
f = 2300.0 MHz; cond = 1.79 S/m; perm = 54.4; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 09/19/2021; Ambient Temp: 21.1°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7539; ConvF:(7.64,7.64,7.64); Calibrated: 2020-10-20
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1415; Calibrated: 2021-03-10
Phantom: Twin-SAM V8.0; Serial: 1966
Measurement SW: cDASY6 Module SAR V16.0.0.116

2300.0 MHz System Verification at 20.0 dBm


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 8.92 W/kg

SAR(1 g) = 4.70 W/kg; SAR(10 g) = 2.31 W/kg

Deviation (1 g) = -4.47%; Deviation (10 g) = -2.53%;

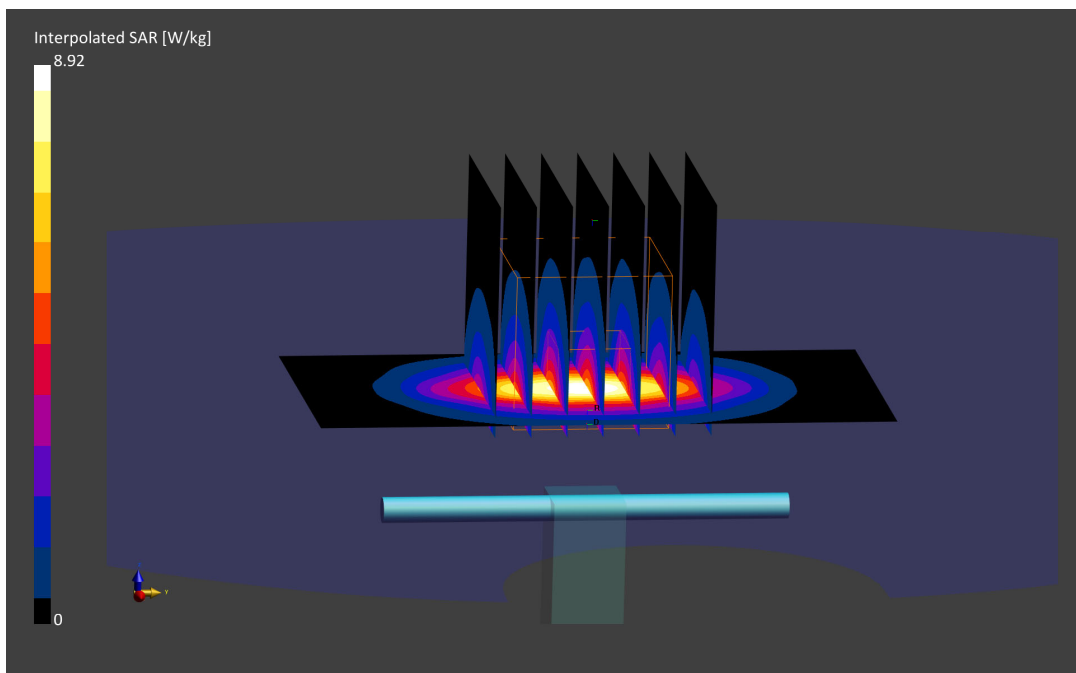

PCTEST

DUT: Dipole 2300.0 MHz; Type: D2300V3 - SN1073

Communication System: UID: 0, CW; Frequency: 2300.0 MHz

Medium: 2450 Body; Medium parameters used:

f = 2300.0 MHz; cond = 1.84 S/m; perm = 52.9; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 10/29/2021; Ambient Temp: 23.4°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7538; ConvF:(7.62,7.62,7.62); Calibrated: 2020-11-23

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn728; Calibrated: 2021-05-11

Phantom: Twin-SAM V5.0; Serial: 1873

Measurement SW: DASY Module SAR V16.0.0.116

2300 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 10.4 W/kg

SAR(10 g) = 2.33 W/kg

Deviation (10 g) = -0.43%;

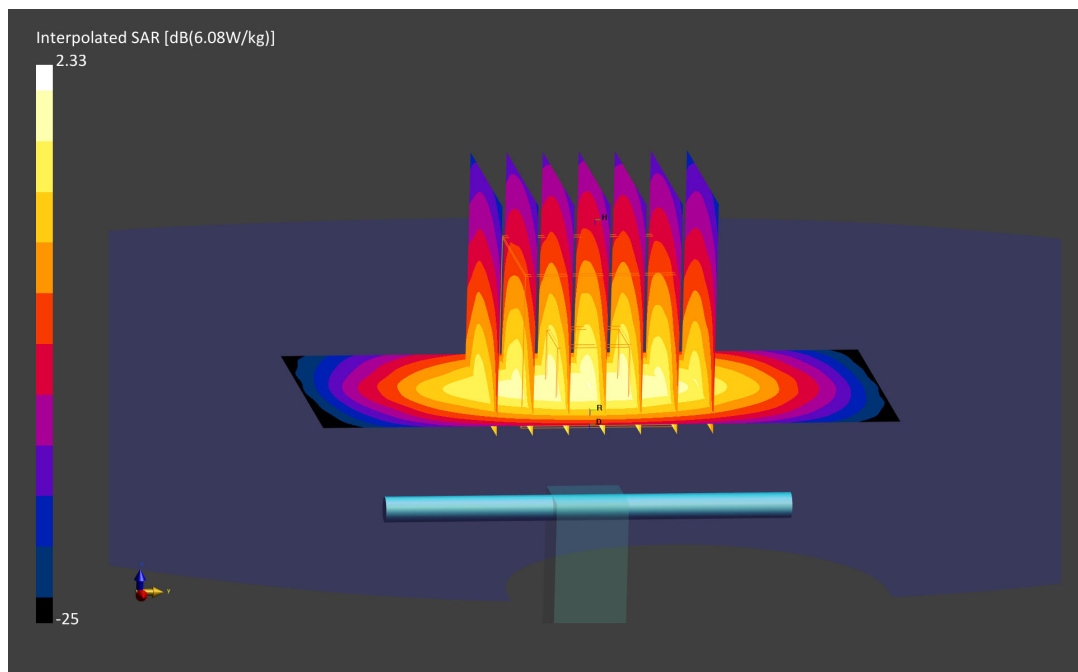

PCTEST

DUT: Dipole 2300.0 MHz; Type: D2300V3 - SN1073

Communication System: UID: 0, CW; Frequency: 2300.0 MHz
Medium: 2450 Body; Medium parameters used:
f = 2300.0 MHz; cond = 1.86 S/m; perm = 52.6; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 10/31/2021; Ambient Temp: 22.1°C; Tissue Temp: 24.5°C

Probe: EX3DV4 - SN3914; ConvF:(7.41,7.41,7.41); Calibrated: 2021-05-18
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn728; Calibrated: 2021-05-11
Phantom: Twin-SAM V5.0; Serial: 1873
Measurement SW: DASY Module SAR V16.0.0.116

2300 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 10.4 W/kg

SAR(1 g) = 4.88 W/kg

Deviation (1 g) = 0.83%

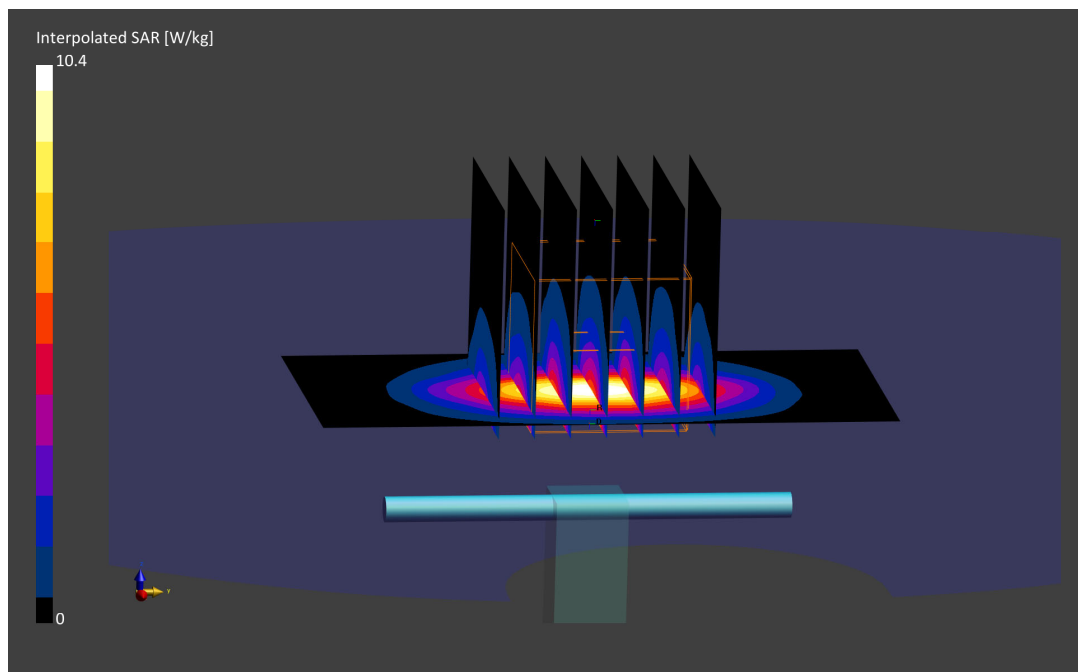

PCTEST

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN981

Communication System: UID: 0, CW; Frequency: 2450.0 MHz

Medium: 2450 Body; Medium parameters used:

f = 2450.0 MHz; cond = 2.00 S/m; perm = 53.9; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 09/19/2021; Ambient Temp: 21.1°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7539; ConvF:(7.62,7.62,7.62); Calibrated: 2020-10-20

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1415; Calibrated: 2021-03-10

Phantom: Twin-SAM V8.0; Serial: 1966

Measurement SW: cDASY6 Module SAR V16.0.0.116

2450.0 MHz System Verification at 20.0 dBm


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 10.6 W/kg

SAR(1 g) = 4.99 W/kg; SAR(10 g) = 2.30 W/kg

Deviation (1 g) = -0.40%; Deviation (10 g) = -2.95%;

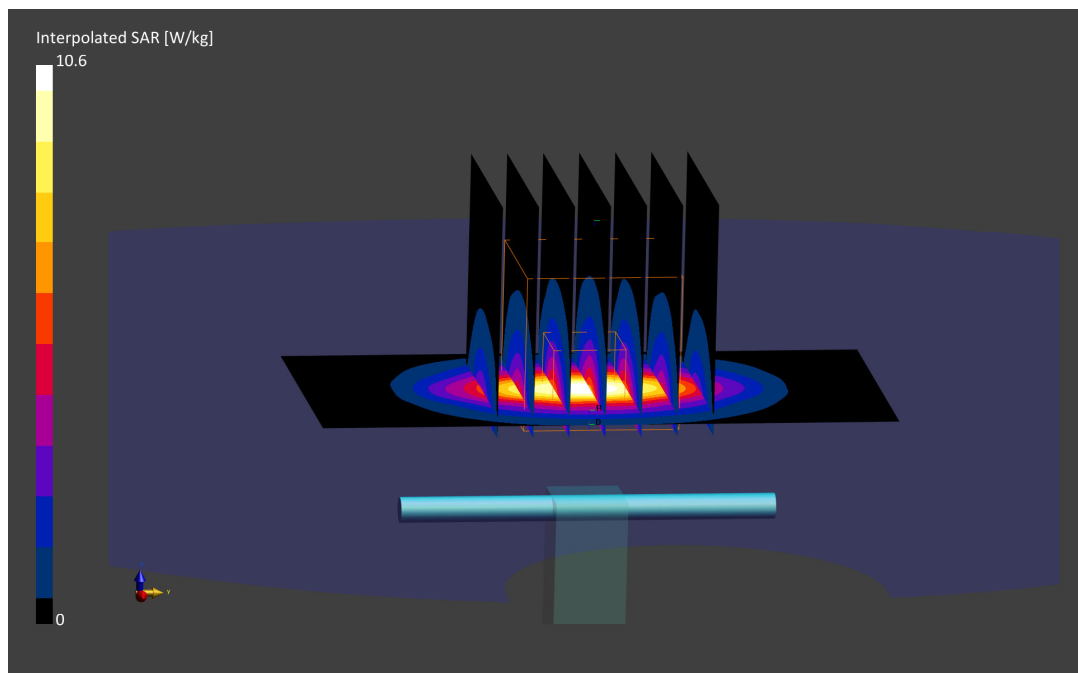

PCTEST

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN719

Communication System: UID: 0, CW; Frequency: 2450.0 MHz

Medium: 2450 Body; Medium parameters used:

f = 2450.0 MHz; cond = 2.04 S/m; perm = 53.1; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 10/21/2021; Ambient Temp: 22.4°C; Tissue Temp: 22.9°C

Probe: EX3DV4 - SN3914; ConvF:(7.33,7.33,7.33); Calibrated: 2021-05-18

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn728; Calibrated: 2021-05-11

Phantom: Twin-SAM V5.0; Serial: 1873

Measurement SW: DASY Module SAR V16.0.0.116

2450 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 11.0 W/kg

SAR(1 g) = 5.21 W/kg

Deviation (1 g) = 0.19%

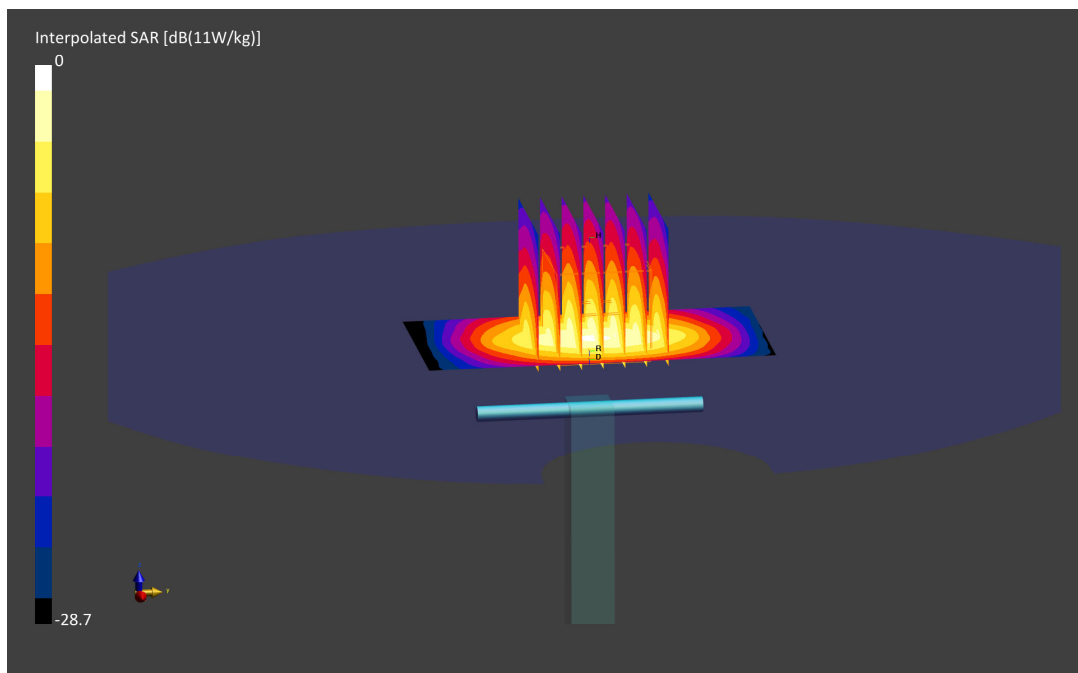

PCTEST

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN797

Communication System: UID: 0, CW; Frequency: 2450.0 MHz

Medium: 2450 Body; Medium parameters used:

$f = 2450.0$ MHz; $\text{cond} = 1.96$ S/m; $\text{perm} = 51.5$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 10/26/2021; Ambient Temp: 21.9°C; Tissue Temp: 20.9°C

Probe: EX3DV4 - SN7670; ConvF:(7.81,7.81,7.81); Calibrated: 2021-08-05

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1681; Calibrated: 2021-08-03

Phantom: Twin-SAM V8.0; Serial: 1630

Measurement SW: DASY Module SAR V16.0.0.116

2450 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 10.5 W/kg

SAR(1 g) = 5.02 W/kg; SAR(10 g) = 2.28 W/kg

Deviation (1 g) = 1.62%; Deviation (10 g) = -2.56%;

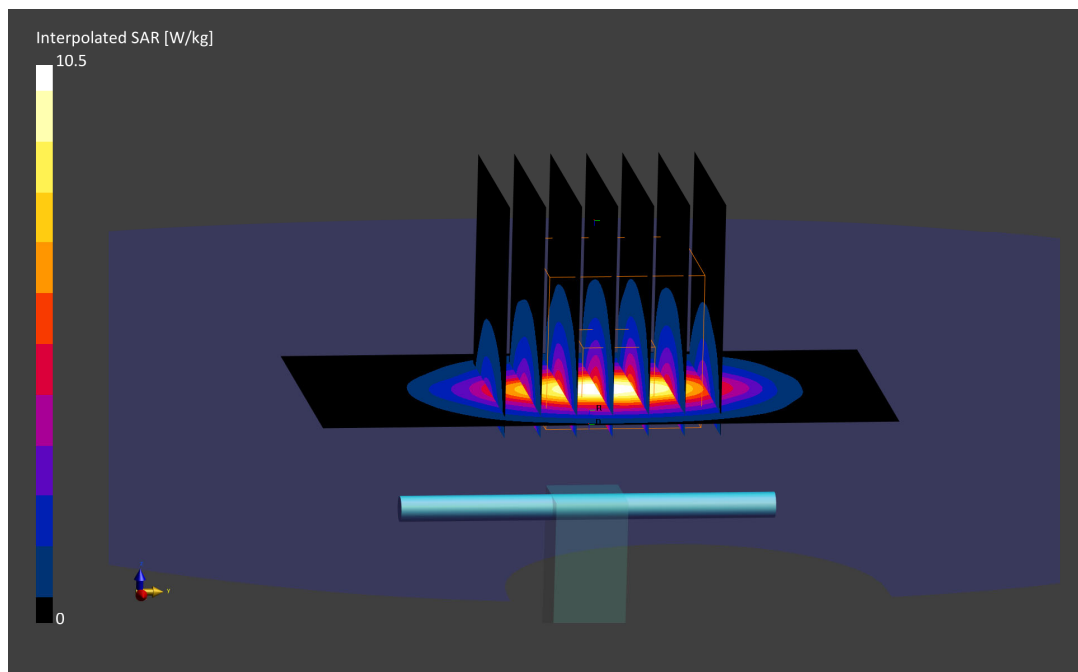

PCTEST

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN981

Communication System: UID: 0, CW; Frequency: 2450.0 MHz

Medium: 2450 Body; Medium parameters used:

f = 2450.0 MHz; cond = 1.97 S/m; perm = 51.4; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 10/29/2021; Ambient Temp: 22.1°C; Tissue Temp: 20.2°C

Probe: EX3DV4 - SN7670; ConvF:(7.81,7.81,7.81); Calibrated: 2021-08-05

Sensor-Surface: 1.4mm (All points)

Electronics: DAE4 Sn1681; Calibrated: 2021-08-03

Phantom: Twin-SAM V8.0; Serial: 1966

Measurement SW: DASY Module SAR V16.0.0.116

2450 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 10.4 W/kg

SAR(1 g) = 4.96 W/kg

Deviation (1 g) = -1.00%

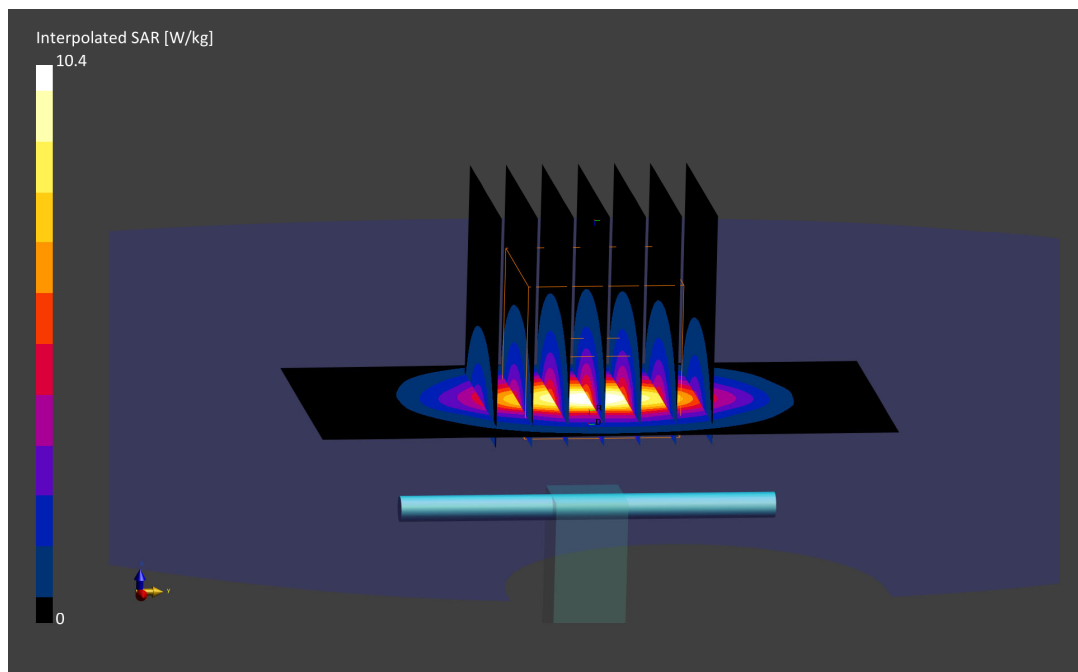

PCTEST

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN797

Communication System: UID: 0, CW; Frequency: 2450.0 MHz

Medium: 2450 Body; Medium parameters used:

f = 2450.0 MHz; cond = 2.03 S/m; perm = 51.1; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 10/29/2021; Ambient Temp: 23.3°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7659; ConvF:(8.7,8.7,8.7); Calibrated: 2021-06-29

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1678; Calibrated: 2021-06-21

Phantom: Twin-SAM V8.0; Serial: 2060

Measurement SW: DASY Module SAR V16.0.0.116

2450 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 9.62 W/kg

SAR(1 g) = 4.77 W/kg

Deviation (1 g) = -3.44%

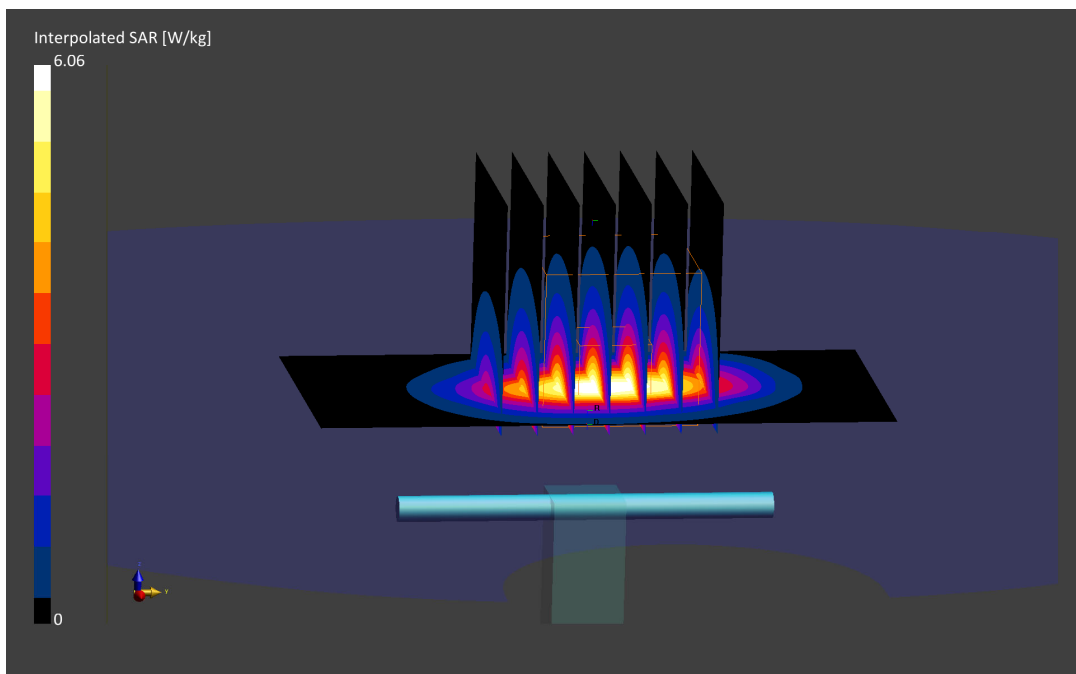

PCTEST

DUT: Dipole 2600.0 MHz; Type: D2600V2 - SN1071

Communication System: UID: 0, CW; Frequency: 2600.0 MHz
Medium: 2450 Body; Medium parameters used:
f = 2600.0 MHz; cond = 2.21 S/m; perm = 53.3; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 09/19/2021; Ambient Temp: 21.1°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7539; ConvF:(7.55,7.55,7.55); Calibrated: 2020-10-20
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1415; Calibrated: 2021-03-10
Phantom: Twin-SAM V8.0; Serial: 1966
Measurement SW: cDASY6 Module SAR V16.0.0.116

2600.0 MHz System Verification at 20.0 dBm


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 11.5 W/kg

SAR(1 g) = 5.25 W/kg; SAR(10 g) = 2.32 W/kg

Deviation (1 g) = -3.31%; Deviation (10 g) = -3.73%;

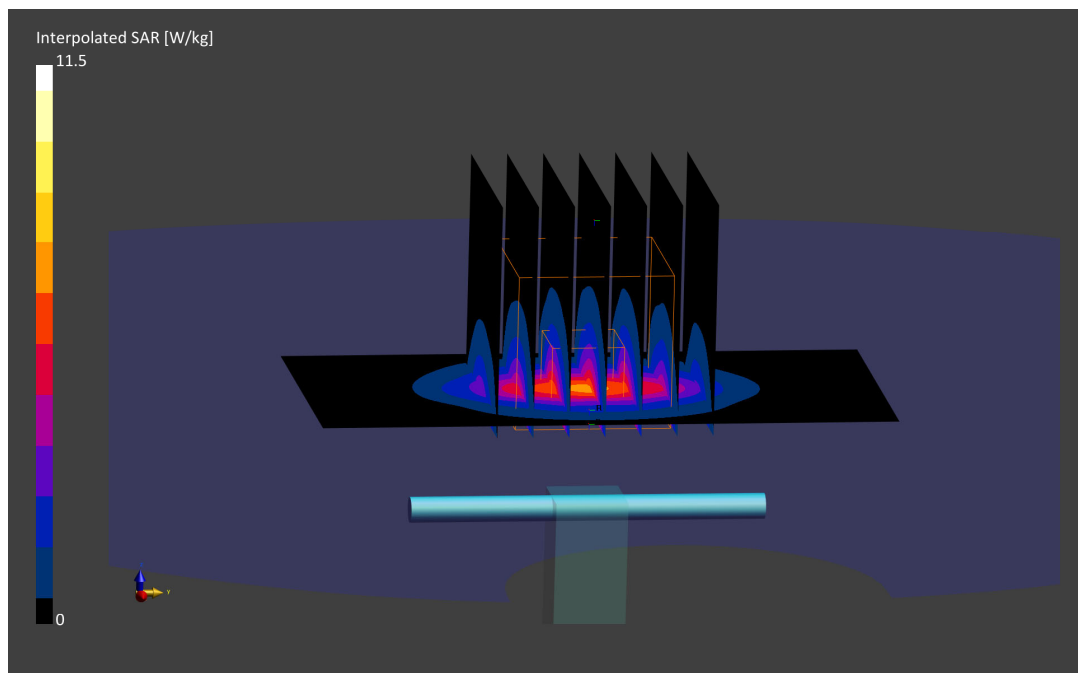

PCTEST

DUT: Dipole 2600.0 MHz; Type: D2600V2 - SN1004

Communication System: UID: 0, CW; Frequency: 2600.0 MHz

Medium: 2450 Body; Medium parameters used:

f = 2600.0 MHz; cond = 2.23 S/m; perm = 50.7; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 10/06/2021; Ambient Temp: 23.5°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN3914; ConvF:(7.14,7.14,7.14); Calibrated: 2021-05-18

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn728; Calibrated: 2021-05-11

Phantom: Twin-SAM V5.0 (Left); Serial: 1873

Measurement SW: DASY Module SAR V16.0.0.116

2600 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 12.2 W/kg

SAR(1 g) = 5.44 W/kg

Deviation (1 g) = -1.81%

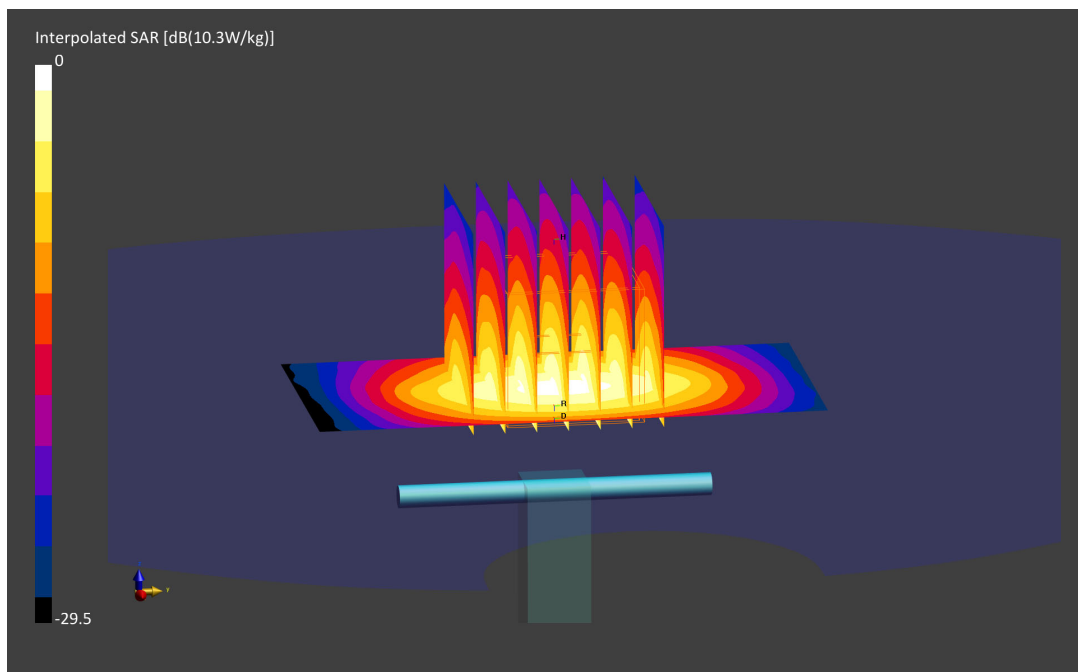

PCTEST

DUT: Dipole 2600.0 MHz; Type: D2600V2 - SN1004

Communication System: UID: 0, CW; Frequency: 2600.0 MHz
Medium: 2450 Body; Medium parameters used:
f = 2600.0 MHz; cond = 2.22 S/m; perm = 52.6; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 10/21/2021; Ambient Temp: 22.4°C; Tissue Temp: 22.9°C

Probe: EX3DV4 - SN3914; ConvF:(7.14,7.14,7.14); Calibrated: 2021-05-18
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn728; Calibrated: 2021-05-11
Phantom: Twin-SAM V5.0; Serial: 1873
Measurement SW: DASY Module SAR V16.0.0.116

2600 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 12.5 W/kg

SAR(1 g) = 5.56 W/kg

Deviation (1 g) = 0.36%

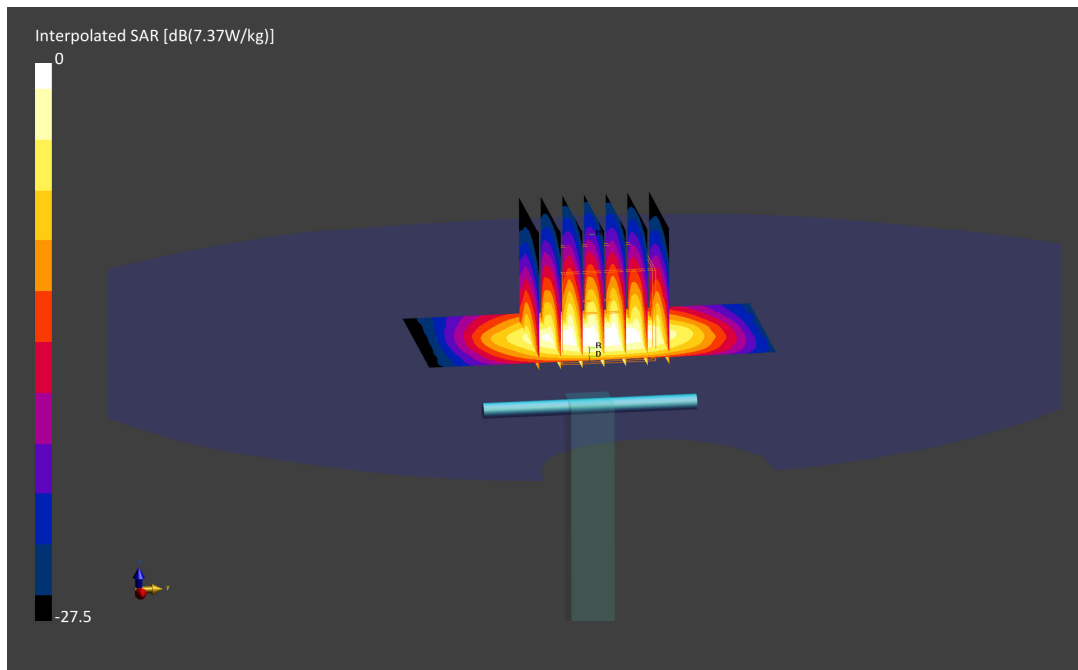

PCTEST

DUT: Dipole 2600.0 MHz; Type: D2600V2 - SN1064

Communication System: UID: 0, CW; Frequency: 2600.0 MHz

Medium: 2450 Body; Medium parameters used:

f = 2600.0 MHz; cond = 2.15 S/m; perm = 51.0; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 10/26/2021; Ambient Temp: 21.9°C; Tissue Temp: 20.9°C

Probe: EX3DV4 - SN7670; ConvF:(7.7,7.7,7.7); Calibrated: 2021-08-05

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1681; Calibrated: 2021-08-03

Phantom: Twin-SAM V8.0; Serial: 1630

Measurement SW: DASY Module SAR V16.0.0.116

2600 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 12.2 W/kg

SAR(1 g) = 5.45 W/kg; SAR(10 g) = 2.37 W/kg

Deviation (1 g) = -1.98%; Deviation (10 g) = -5.20%;

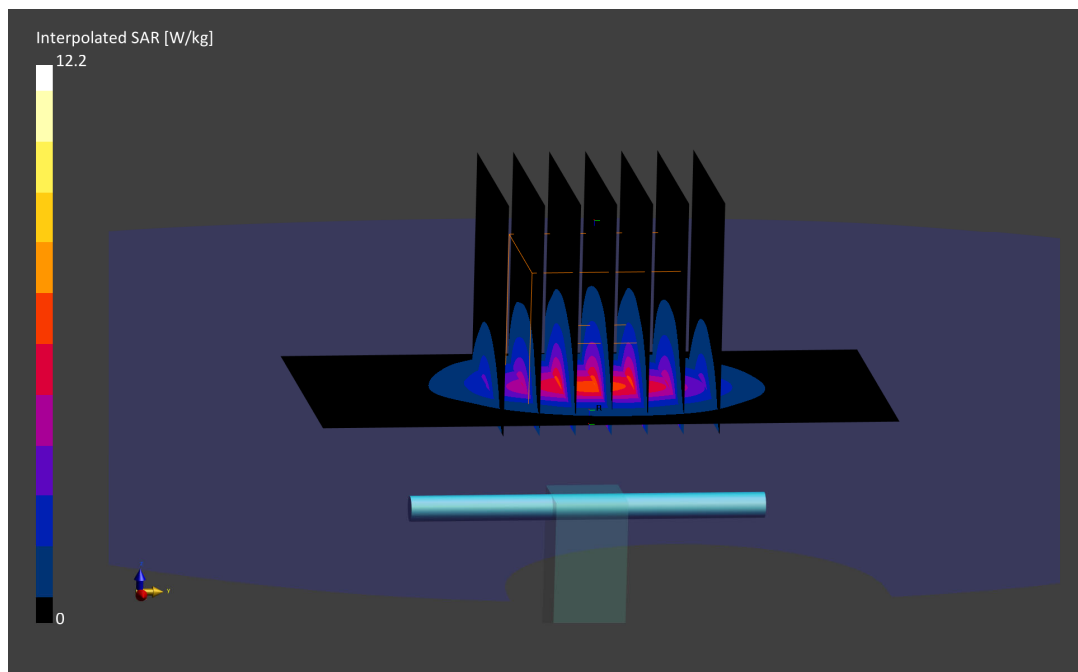

PCTEST

DUT: Dipole 2600.0 MHz; Type: D2600V2 - SN1064

Communication System: UID: 0, CW; Frequency: 2600.0 MHz
Medium: 2450 Body; Medium parameters used:
f = 2600.0 MHz; cond = 2.25 S/m; perm = 51.4; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 10/27/2021; Ambient Temp: 22.9°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7659; ConvF:(8.37,8.37,8.37); Calibrated: 2021-06-29
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1678; Calibrated: 2021-06-21
Phantom: Twin-SAM V8.0; Serial: 2060
Measurement SW: DASY Module SAR V16.0.0.65

2600 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 12.5 W/kg

SAR(1 g) = 5.76 W/kg

Deviation (1 g) = 3.60%

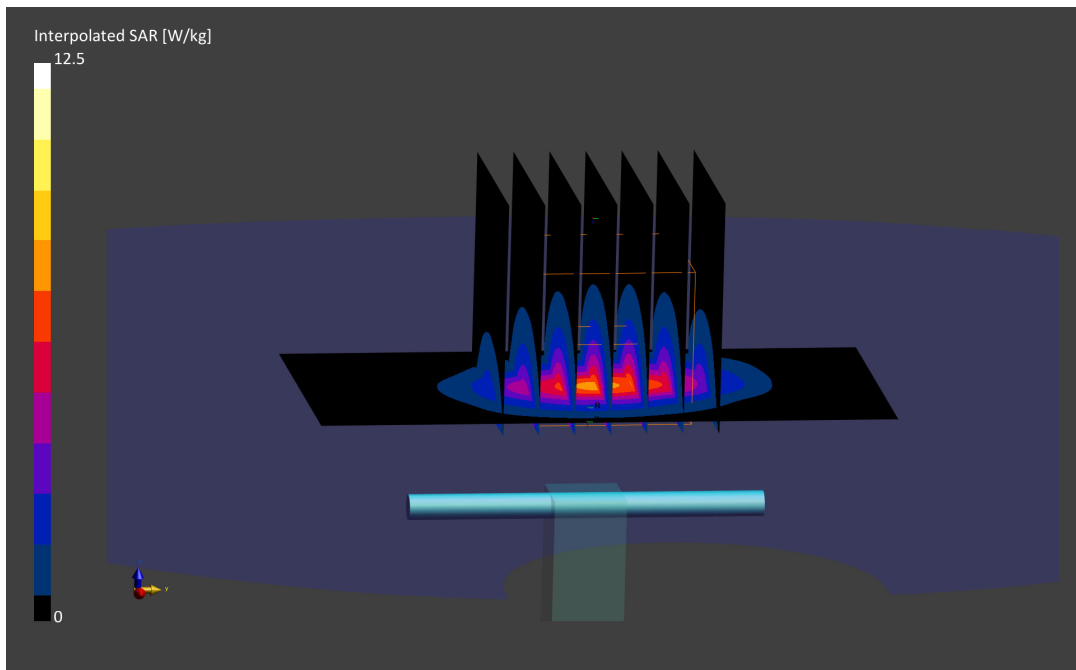

PCTEST

DUT: Dipole 2600.0 MHz; Type: D2600V2 - SN1071

Communication System: UID: 0, CW; Frequency: 2600.0 MHz

Medium: 2450 Body; Medium parameters used:

f = 2600.0 MHz; cond = 2.18 S/m; perm = 50.4; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 11/03/2021; Ambient Temp: 23.5°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7670; ConvF:(7.7,7.7,7.7); Calibrated: 2021-08-05

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1681; Calibrated: 2021-08-03

Phantom: Twin-SAM V8.0; Serial: 1966

Measurement SW: DASY Module SAR V16.0.0.116

2600 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 11.8 W/kg

SAR(10 g) = 2.26 W/kg

Deviation (10 g) = -6.22%;

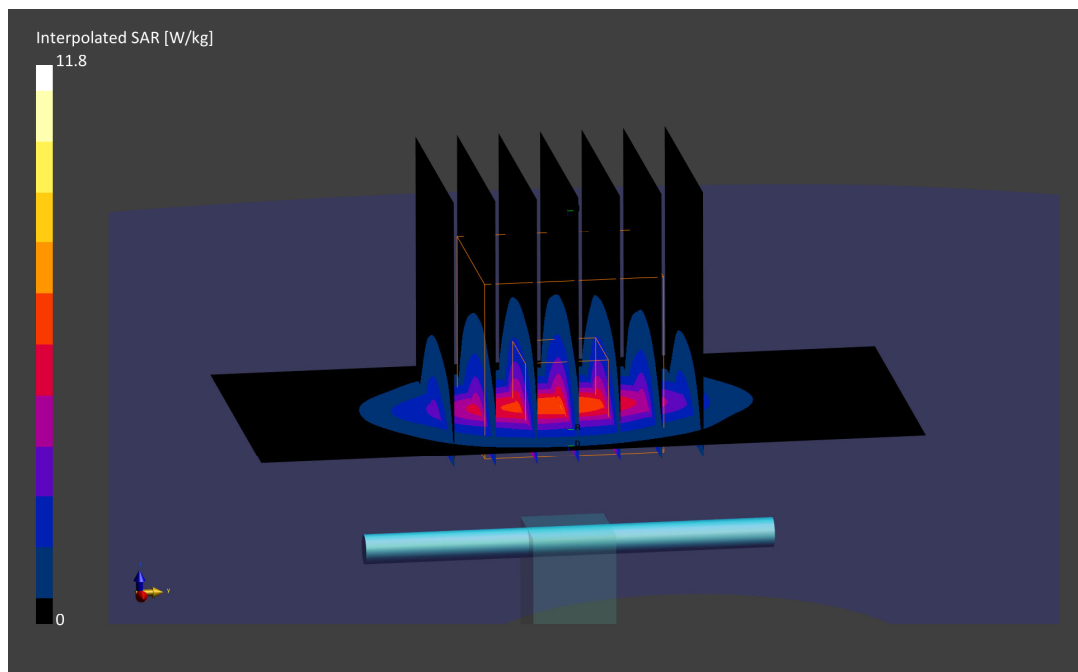

PCTEST

DUT: Dipole 2600.0 MHz; Type: D2600V2 - SN1064

Communication System: UID: 0, CW; Frequency: 2600.0 MHz

Medium: 2450 Body; Medium parameters used:

f = 2600.0 MHz; cond = 2.23 S/m; perm = 50.5; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 11/08/2021; Ambient Temp: 23.1°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7670; ConvF:(7.7,7.7,7.7); Calibrated: 2021-08-05

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1681; Calibrated: 2021-08-03

Phantom: Twin-SAM V8.0; Serial: 1966

Measurement SW: DASY Module SAR V16.0.0.116

2600 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 11.9 W/kg

SAR(10 g) = 2.34 W/kg

Deviation (10 g) = -6.40%;

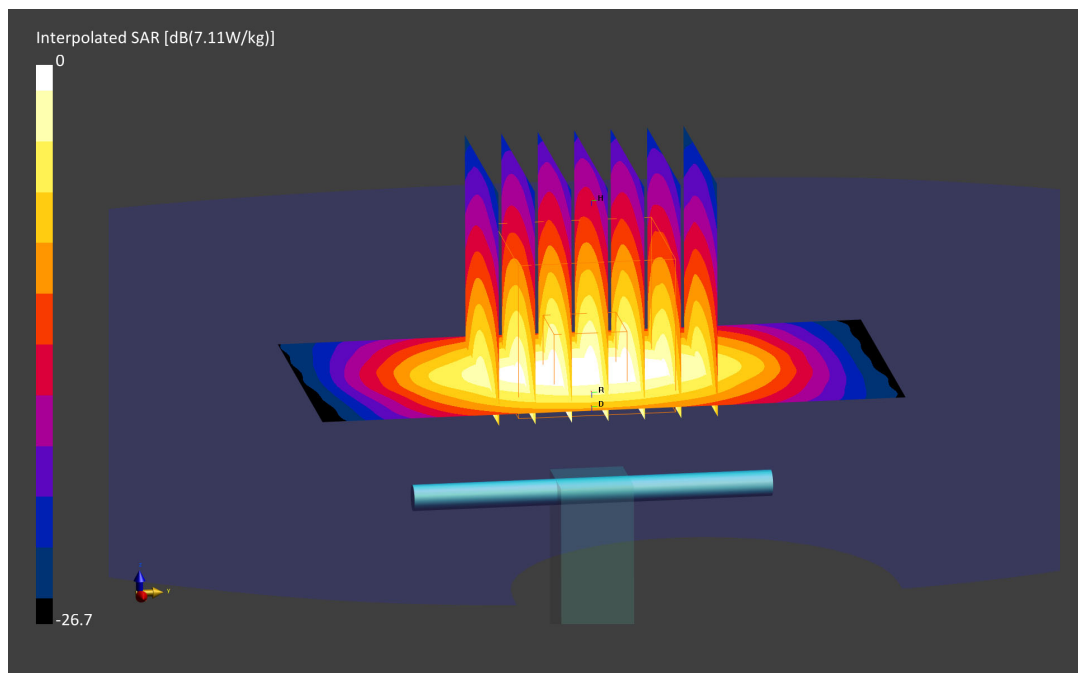

PCTEST

DUT: Dipole 3500.0 MHz; Type: D3500V2 - SN1059

Communication System: UID: 0, CW; Frequency: 3500.0 MHz
Medium: 3600 Body; Medium parameters used:
f = 3500.0 MHz; cond = 3.16 S/m; perm = 51.6; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 09/27/2021; Ambient Temp: 22.7°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7551; ConvF:(6.23,6.23,6.23); Calibrated: 2020-10-20
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1333; Calibrated: 2020-10-16
Phantom: Twin-SAM V5.0; Serial: 1692 Right Back
Measurement SW: DASY Module SAR V16.0.0.116

3500 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 15.9 W/kg

SAR(1 g) = 6.21 W/kg; SAR(10 g) = 2.35 W/kg

Deviation (1 g) = -1.43%; Deviation (10 g) = 0.86%;

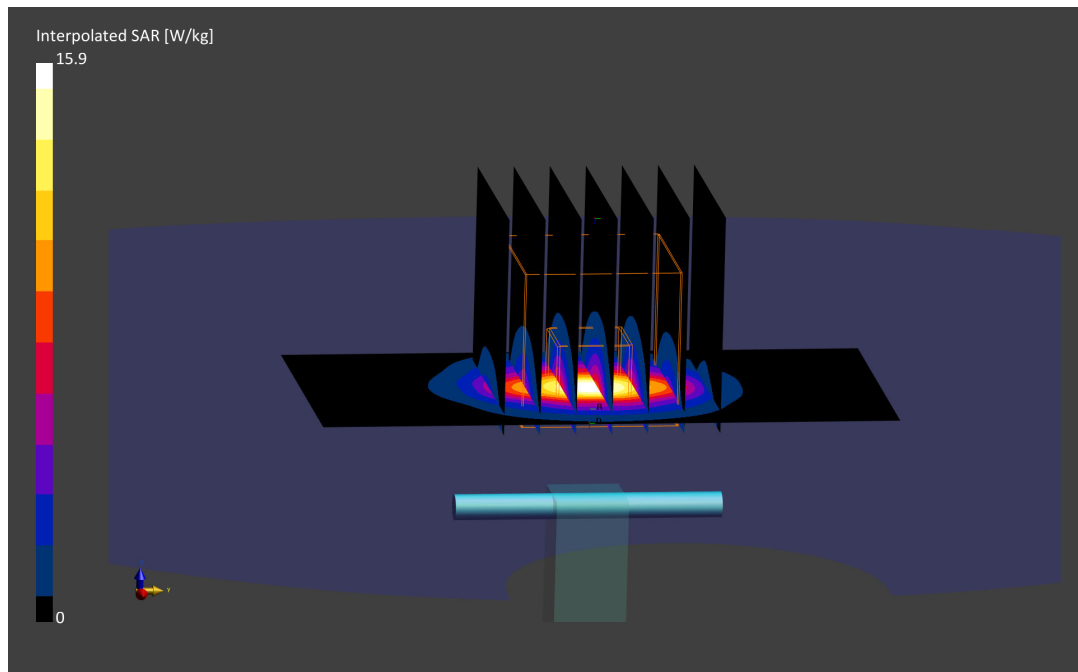

PCTEST

DUT: Dipole 3500.0 MHz; Type: D3500V2 - SN1059

Communication System: UID: 0, CW; Frequency: 3500.0 MHz
Medium: 3600 Body; Medium parameters used:
f = 3500.0 MHz; cond = 3.17 S/m; perm = 49.3; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 10/21/2021; Ambient Temp: 21.0°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7661; ConvF:(6.7,6.7,6.7); Calibrated: 2021-06-28
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1450; Calibrated: 2021-08-16
Phantom: Twin-SAM V5.0; Serial: 1692 Right Back
Measurement SW: DASY Module SAR V16.0.0.116

3500 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 17.2 W/kg

SAR(1 g) = 6.76 W/kg

Deviation (1 g) = 7.30%

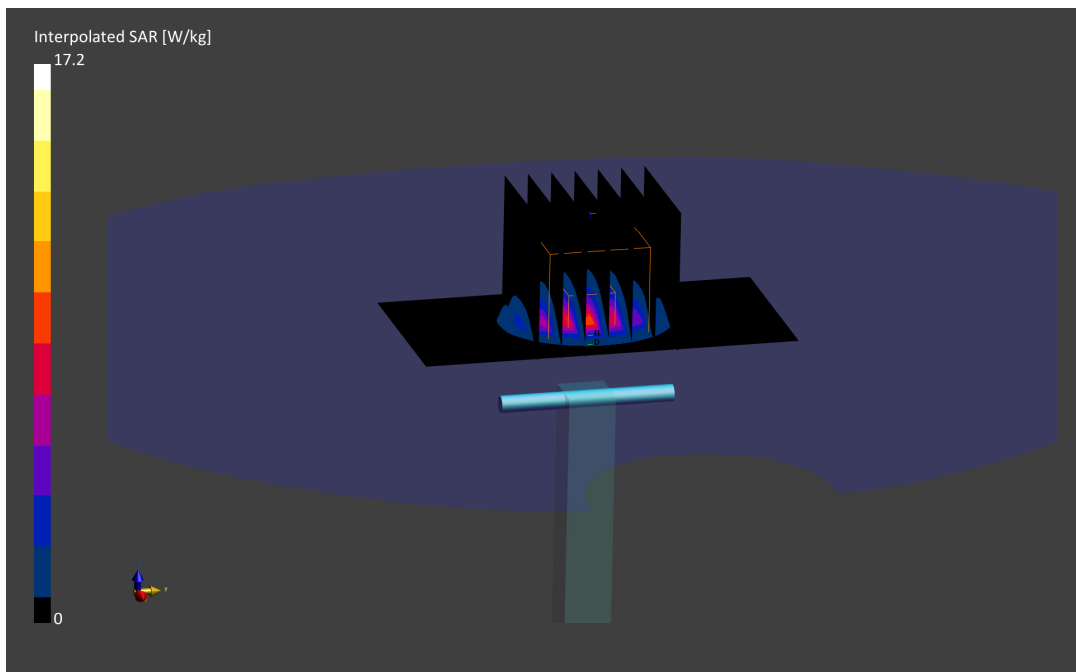

PCTEST

DUT: Dipole 3700.0 MHz; Type: D3700V2 - SN1018

Communication System: UID: 0, CW; Frequency: 3700.0 MHz
Medium: 3600 Body; Medium parameters used:
f = 3700.0 MHz; cond = 3.40 S/m; perm = 51.2; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 09/27/2021; Ambient Temp: 22.7°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7551; ConvF:(6.33,6.33,6.33); Calibrated: 2020-10-20
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1333; Calibrated: 2020-10-16
Phantom: Twin-SAM V5.0; Serial: 1692 Right Back
Measurement SW: DASY Module SAR V16.0.0.116

3700 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 15.4 W/kg

SAR(1 g) = 6.01 W/kg

Deviation (1 g) = -5.35%

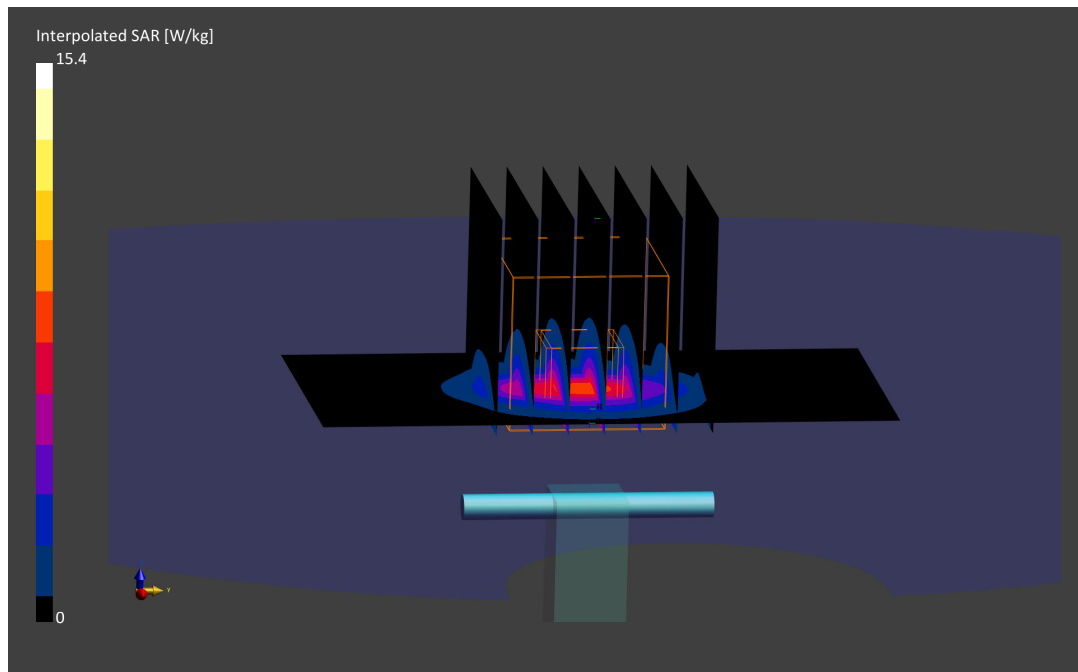

PCTEST

DUT: Dipole 3700.0 MHz; Type: D3700V2 - SN1018

Communication System: UID: 0, CW; Frequency: 3900.0 MHz
Medium: 3600 Body; Medium parameters used:
f = 3700.0 MHz; cond = 3.41 S/m; perm = 49.0; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 10/21/2021; Ambient Temp: 21.0°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7661; ConvF:(6.51,6.51,6.51); Calibrated: 2021-06-28
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1450; Calibrated: 2021-08-16
Phantom: Twin-SAM V5.0; Serial: 1692 Right Back
Measurement SW: DASY Module SAR V16.0.0.116

3700 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 17.8 W/kg

SAR(1 g) = 6.7 W/kg

Deviation (1 g) = 5.51%

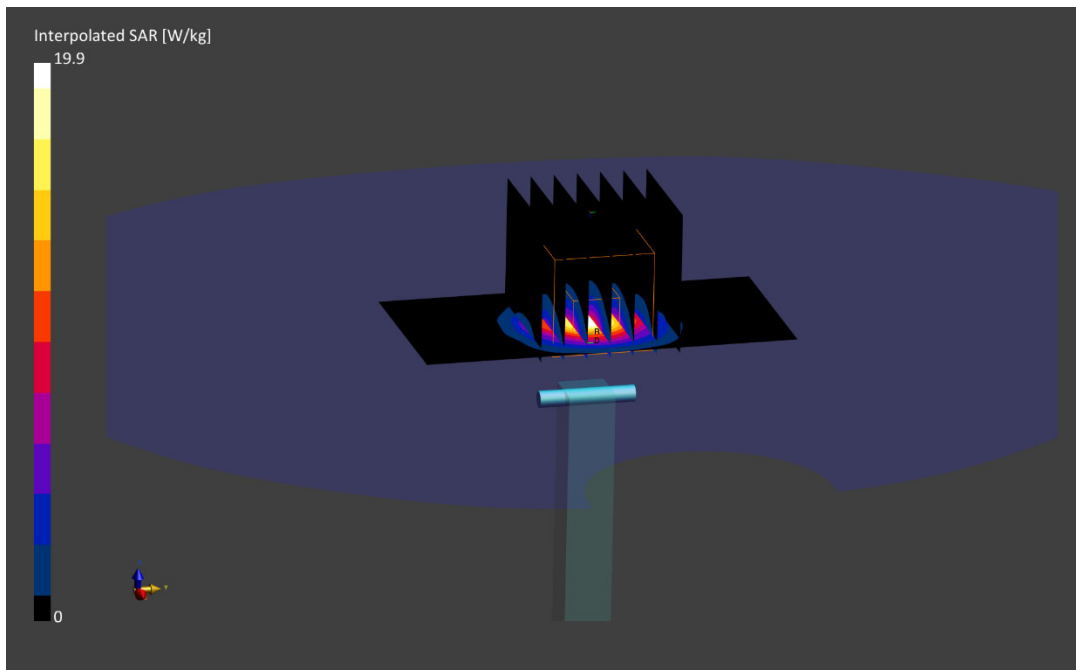

PCTEST

DUT: Dipole 3700.0 MHz; Type: D3700V2 - SN1018

Communication System: UID: 0, CW; Frequency: 3700.0 MHz
Medium: 3600 Body; Medium parameters used:
f = 3700.0 MHz; cond = 3.50 S/m; perm = 49.1; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 10/31/2021; Ambient Temp: 20.0°C; Tissue Temp: 19.6°C

Probe: EX3DV4 - SN7661; ConvF:(6.66,6.66,6.66); Calibrated: 2021-06-28
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1450; Calibrated: 2021-08-16
Phantom: Twin-SAM V5.0; Serial: 1692 Right Back
Measurement SW: DASY Module SAR V16.0.0.116

3700 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 17.5 W/kg

SAR(10 g) = 2.41 W/kg

Deviation (10 g) = 7.11%;

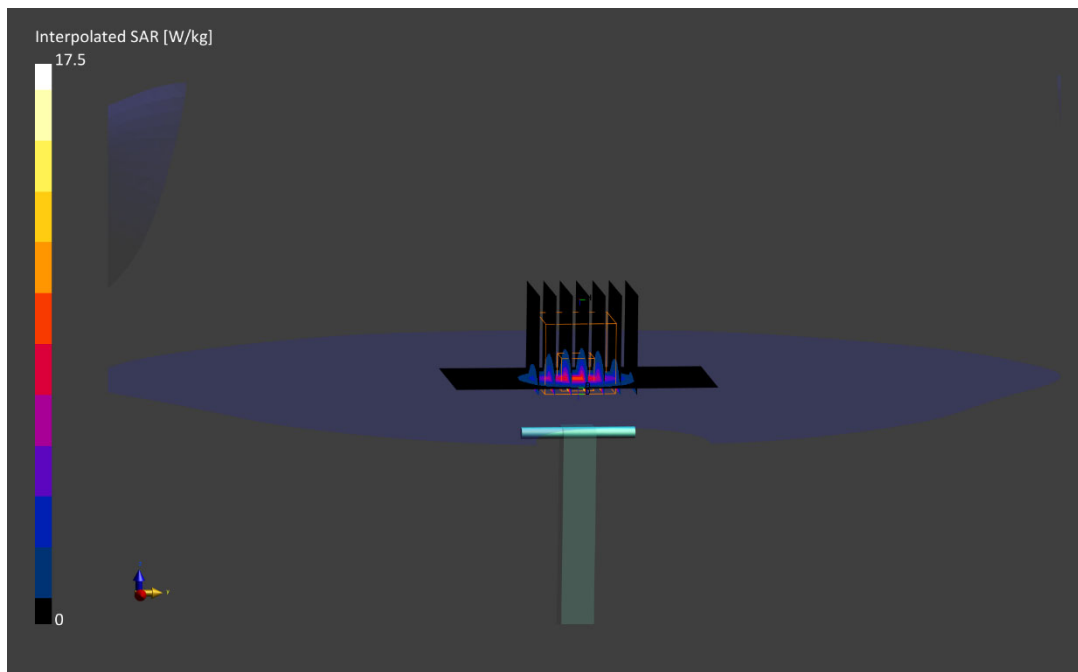

PCTEST

DUT: Dipole 3900.0 MHz; Type: D3900V2 - SN1073

Communication System: UID: 0, CW; Frequency: 3900.0 MHz
Medium: 3600 Body; Medium parameters used:
f = 3900.0 MHz; cond = 3.65 S/m; perm = 50.9; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 09/27/2021; Ambient Temp: 22.7°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7551; ConvF:(5.91,5.91,5.91); Calibrated: 2020-10-20
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1333; Calibrated: 2020-10-16
Phantom: Twin-SAM V5.0; Serial: 1692 Right Back
Measurement SW: DASY Module SAR V16.0.0.116

3900 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 18.3 W/kg

SAR(1 g) = 6.64 W/kg

Deviation (1 g) = 3.27%

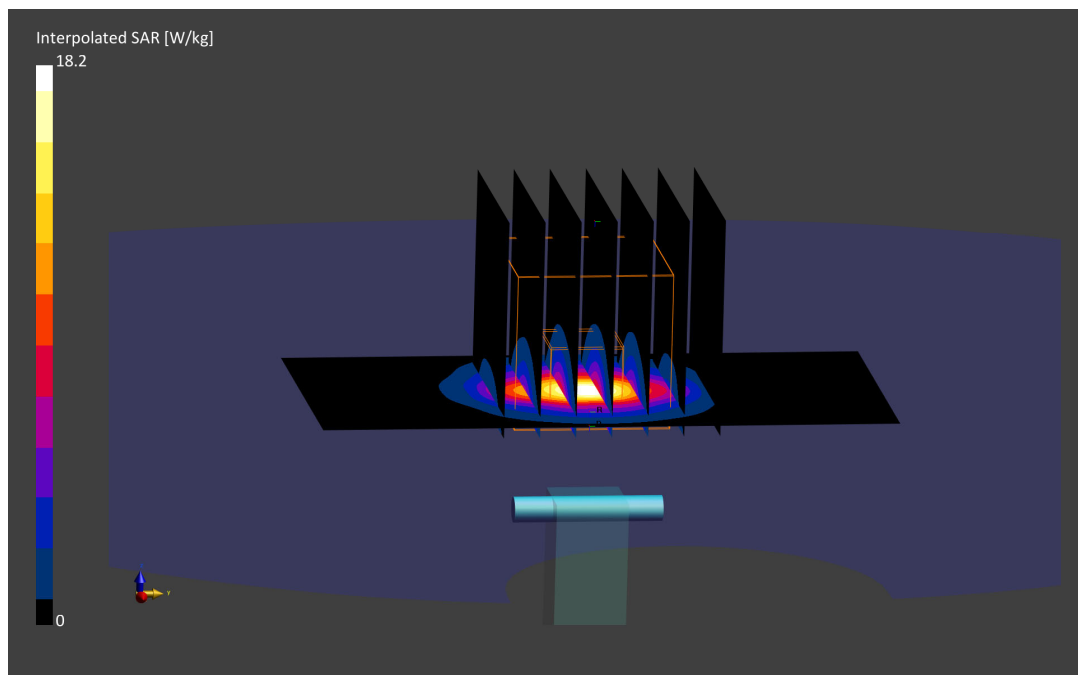

PCTEST

DUT: Dipole 3900.0 MHz; Type: D3900V2 - SN1073

Communication System: UID: 0, CW; Frequency: 3900.0 MHz
Medium: 3600 Body; Medium parameters used:
f = 3900.0 MHz; cond = 3.74 S/m; perm = 48.7; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 10/31/2021; Ambient Temp: 20.1°C; Tissue Temp: 19.6°C

Probe: EX3DV4 - SN7661; ConvF:(6.51,6.51,6.51); Calibrated: 2021-06-28
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1450; Calibrated: 2021-08-16
Phantom: Twin-SAM V5.0; Serial: 1692 Right Back
Measurement SW: DASY Module SAR V16.0.0.116

3900 MHz System Verification at 20 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 18.7 W/kg

SAR(10 g) = 2.23 W/kg

Deviation (10 g) = 1.36%;

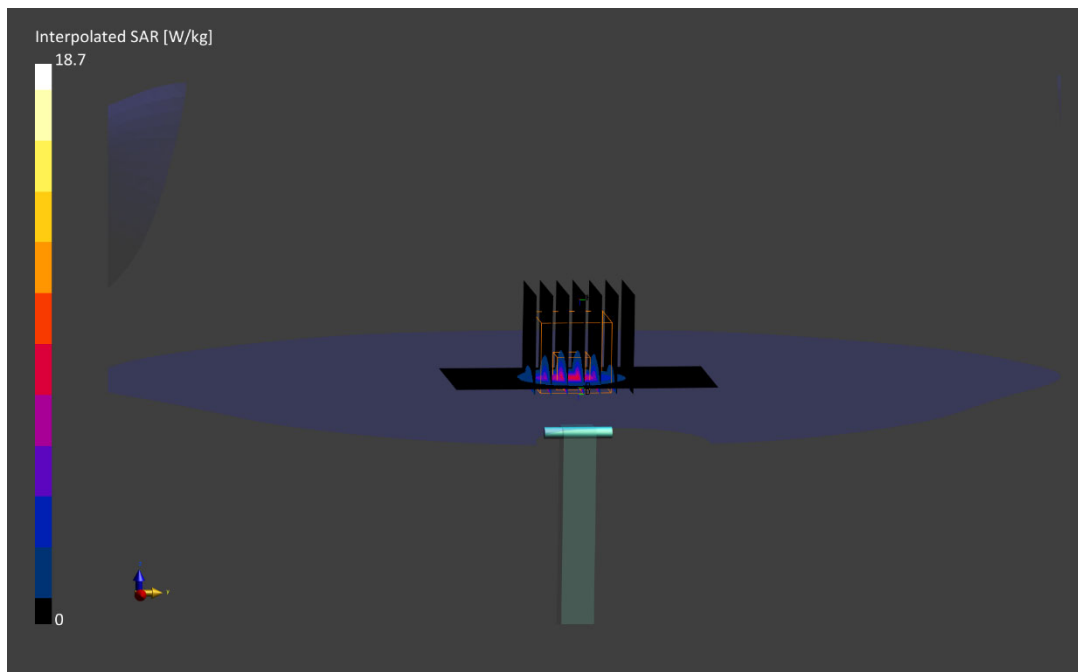

PCTEST

DUT: Dipole 5250.0 MHz; Type: D5GHzV2 - SN1057

Communication System: UID: 0, CW; Frequency: 5250.0 MHz
Medium: 5200-5800 Body; Medium parameters used:
f = 5250.0 MHz; cond = 5.38 S/m; perm = 47.6; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 10/20/2021; Ambient Temp: 20.1°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7526; ConvF:(4.55,4.55,4.55); Calibrated: 2021-03-16
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1272; Calibrated: 2021-03-18
Phantom: Twin-SAM V8.0; Serial: 2063
Measurement SW: DASY Module SAR V16.0.0.116

5250 MHz System Verification at 17 dBm (50 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 14.2 W/kg

SAR(1 g) = 3.68 W/kg; SAR(10 g) = 1.05 W/kg

Deviation (1 g) = -0.94%; Deviation (10 g) = 1.45%

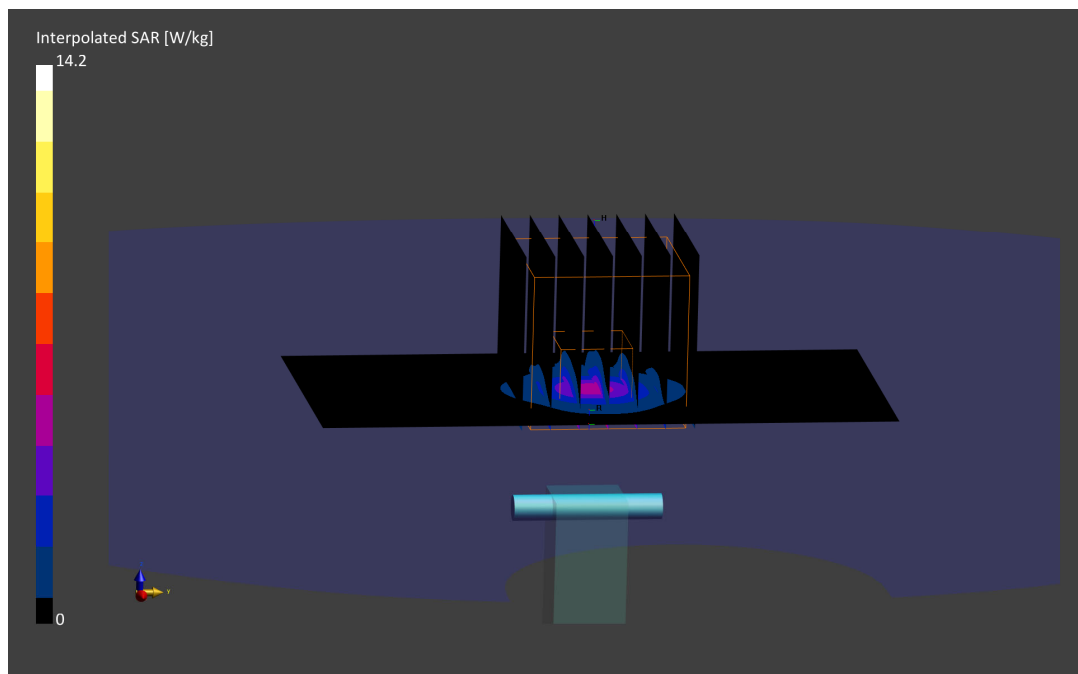

PCTEST

DUT: Dipole 5600.0 MHz; Type: D5GHzV2 - SN1057

Communication System: UID: 0, CW; Frequency: 5600.0 MHz
Medium: 5200-5800 Body; Medium parameters used:
f = 5600.0 MHz; cond = 5.89 S/m; perm = 47.0; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 10/20/2021; Ambient Temp: 20.1°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7526; ConvF:(4.16,4.16,4.16); Calibrated: 2021-03-16
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1272; Calibrated: 2021-03-18
Phantom: Twin-SAM V8.0; Serial: 2063
Measurement SW: DASY Module SAR V16.0.0.116

5600 MHz System Verification at 17 dBm (50 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 15.9 W/kg

SAR(1 g) = 3.81 W/kg; SAR(10 g) = 1.06 W/kg

Deviation (1 g) = -1.55%; Deviation (10 g) = -0.93%

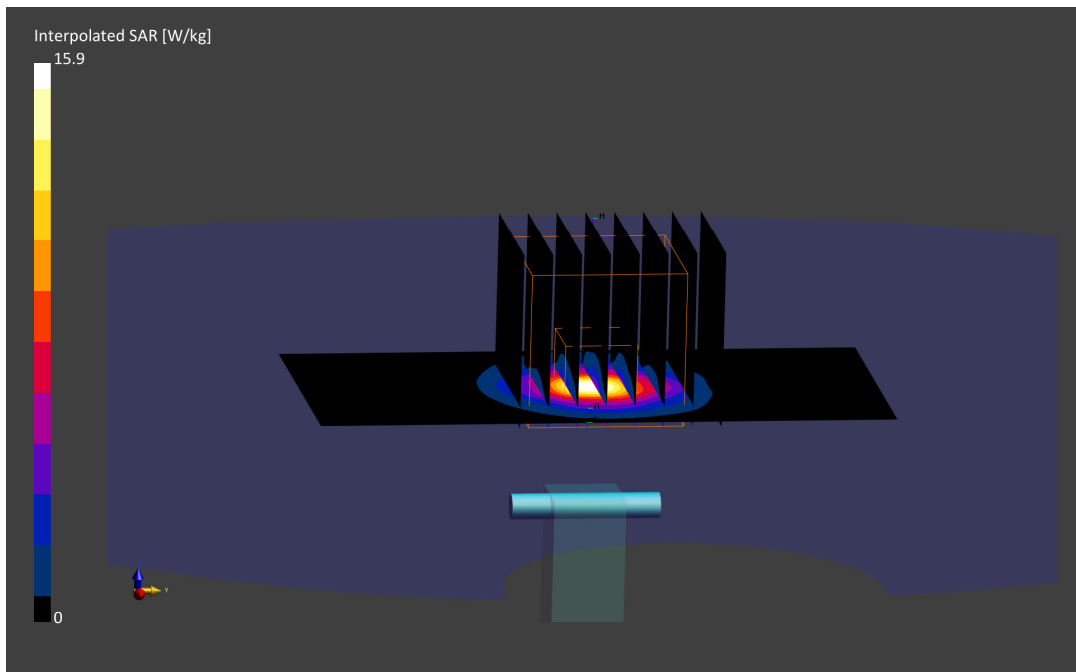

PCTEST

DUT: Dipole 5750.0 MHz; Type: D5GHzV2 - SN1057

Communication System: UID: 0, CW; Frequency: 5750.0 MHz
Medium: 5200-5800 Body; Medium parameters used:
f = 5750.0 MHz; cond = 6.12 S/m; perm = 46.7; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 10/20/2021; Ambient Temp: 20.1°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7526; ConvF:(4.18,4.18,4.18); Calibrated: 2021-03-16
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1272; Calibrated: 2021-03-18
Phantom: Twin-SAM V8.0; Serial: 2063
Measurement SW: DASY Module SAR V16.0.0.116

5750 MHz System Verification at 17 dBm (50 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 15.0 W/kg

SAR(1 g) = 3.50 W/kg; SAR(10 g) = 0.997 W/kg

Deviation (1 g) = -3.85%; Deviation (10 g) = -0.30%

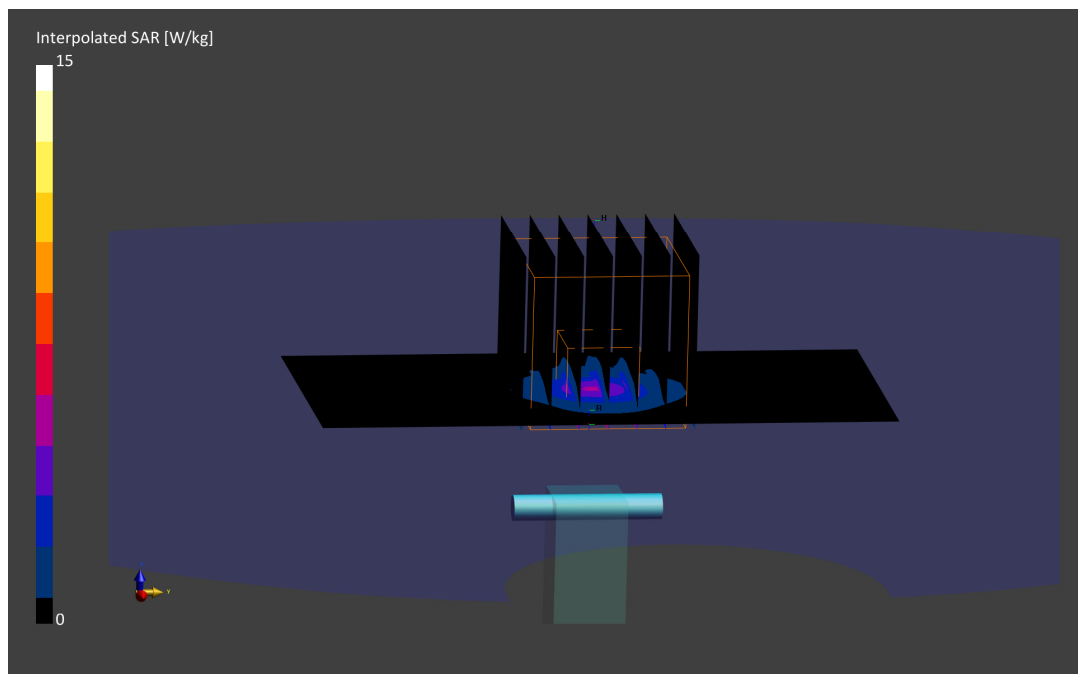

PCTEST

DUT: Dipole 5800.0 MHz; Type: D5GHzV2 - SN1191

Communication System: UID: 0, CW; Frequency: 5800.0 MHz
Medium: 5200-5800 Body; Medium parameters used:
f = 5800.0 MHz; cond = 6.26 S/m; perm = 46.9; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 11/04/2021; Ambient Temp: 24.5°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7552; ConvF:(4.05,4.05,4.05); Calibrated: 2021-09-20
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1677; Calibrated: 2021-06-22
Phantom: Twin-SAM V8.0; Serial: 2056
Measurement SW: DASY Module SAR V16.0.0.65

5800 MHz System Verification at 17 dBm (50 mW)

Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 14.5 W/kg

SAR(1 g) = 3.44 W/kg; SAR(10 g) = 0.970 W/kg

Deviation (1 g) = -6.39%; Deviation (10 g) = -3.96%;

