

MEASUREMENT REPORT

FCC PART 15.247 Bluetooth

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea


Date of Testing:
09/09 – 12/03/2021
Report Issue Date:
12/07/2021
Test Site/Location:
PCTEST Lab. Columbia, MD, USA
Test Report Serial No.:
1M2110010116-14.A3L

FCC ID:	A3LSMS906E
APPLICANT:	Samsung Electronics Co., Ltd.

Application Type:	Certification
Model:	SM-S906E/DS
Additional Model:	SM-S906E
EUT Type:	Portable Handset
Max. RF Output Power:	111.94 mW (20.49 dBm) Peak Conducted
Frequency Range:	2402 – 2480MHz
Type of Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK
FCC Classification:	FCC Part 15 Spread Spectrum Transmitter (DSS)
FCC Rule Part(s):	Part 15 Subpart C (15.247)
Test Procedure(s):	ANSI C63.10-2013, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President



FCC ID: A3LSMS906E		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 1 of 129

1.0	INTRODUCTION	3
1.1	Scope	3
1.2	PCTEST Test Location.....	3
1.3	Test Facility / Accreditations.....	3
2.0	PRODUCT INFORMATION.....	4
2.1	Equipment Description	4
2.2	Device Capabilities.....	4
2.3	Antenna Description	5
2.4	Test Configuration	5
2.5	Software and Firmware	5
2.6	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Evaluation Procedure	6
3.2	AC Line Conducted Emissions	6
3.3	Radiated Emissions.....	7
3.4	Environmental Conditions.....	7
4.0	ANTENNA REQUIREMENTS	8
5.0	MEASUREMENT UNCERTAINTY	9
6.0	TEST EQUIPMENT CALIBRATION DATA	10
7.0	TEST RESULTS.....	11
7.1	Summary.....	11
7.2	20dB Bandwidth Measurement	12
7.3	Output Power Measurement.....	23
7.4	Band Edge Compliance.....	82
7.5	Carrier Frequency Separation	87
7.6	Time of Occupancy.....	92
7.7	Number of Hopping Channels	95
7.8	Conducted Spurious Emissions.....	98
7.9	Radiated Spurious Emission Measurements – Above 1GHz.....	105
7.10	Radiated Restricted Band Edge Measurements.....	120
7.11	Radiated Spurious Emissions Measurements – Below 1GHz	122
7.12	Line Conducted Measurement Data	126
8.0	CONCLUSION.....	129

FCC ID: A3LSMS906E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 2 of 129

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISSED.

FCC ID: A3LSMS906E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 3 of 129

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMS906E**. The test data contained in this report pertains only to the emissions due to the EUT's Bluetooth transmitter.

- This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following:
 - A) The hopping sequence is pseudorandom
 - B) All channels are used equally on average
 - C) The receiver input bandwidth equals the transmit bandwidth
 - D) The receiver hops in sequence with the transmit signal
- 15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.
- 15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection/hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.
- 15.247(h): The EUT employs Adaptive Frequency Hopping (AFH) which identifies sources of interference namely devices operating in 802.11 WLAN and excludes them from the list of available channels. The process of re-mapping reduces the number of test channels from 79 channels to a minimum number of 20 channels.

Test Device Serial No.: 1229M, 0292M, 0298M, 1224M, 0278M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR, 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz and 6GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer, UWB

Ch.	Frequency (MHz)
00	2402
:	:
39	2441
:	:
78	2480

Table 2-1. Frequency/ Channel Operations

✓ = Supported

✗ = Not Supported

Note: This device is capable of operating in hopping and non-hopping mode. The EUT can hop between 79 different channels in the 2400 – 2483.5MHz band.

This device can transmit using Dual BT technology, transmitting 1-stream data using two antennas and receiving using two antennas.

FCC ID: A3LSMS906E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 4 of 129

2.3 Antenna Description

Following antenna was used for the testing.

Frequency [GHz]	Antenna 1 Gain [dBi]	Antenna 2 Gain [dBi]	Directional Gain (dBi)
2.4	-6.1	-7.3	-3.67

Table 2-2. Antenna Peak Gain

Note: This device is capable of operating in hopping and non-hopping mode. The EUT can hop between 79 different channels in the 2400 – 2483.5MHz band.

2.4 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013. ANSI C63.10-2013 was also used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5, 7.6, 7.7, and 7.8 for antenna port conducted emissions test setups.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.5 Software and Firmware

The test was conducted with firmware version S906EXXU0AUJ5 installed on the EUT.

2.6 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMS906E	 Proud to be part of  element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 5 of 129

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) was used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply; it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that the cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.12. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: A3LSMS906E	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 6 of 129

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMS906E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 7 of 129

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: A3LSMS906E	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 8 of 129

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMS906E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 9 of 129

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurement antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	WL25-1	Conducted Cable Set (25GHz)	8/18/2021	Annual	8/18/2022	WL25-1
-	WL25-2	Conducted Cable Set (25GHz)	8/18/2021	Annual	8/18/2022	WL25-2
-	WL25-3	Conducted Cable Set (25GHz)	8/18/2021	Annual	8/18/2022	WL25-3
Agilent	N9030A	PXA Signal Analyzer (44GHz)	7/21/2020	Annual	7/21/2022	MY49430494
Anritsu	ML2495A	Power Meter	3/4/2021	Annual	3/4/2022	1328004
Anritsu	ML2495A	Power Meter	1/18/2021	Annual	1/18/2022	941001
Anritsu	ML2496A	Power Meter	11/25/2020	Annual	11/25/2021	1405003
Anritsu	MA2411B	Pulse Power Sensor	9/21/2021	Annual	9/21/2022	1315051
Anritsu	MA2411B	Pulse Power Sensor	1/18/2021	Annual	1/18/2022	846215
Emco	3115	Horn Antenna (1-18GHz)	6/18/2020	Biennial	6/18/2022	9704-5182
ETS-Lindgren	3816/2NM	Line Impedance Stabilization Network	7/9/2020	Biennial	7/9/2022	114451
Keysight Technologies	N9030A	PXA Signal Analyzer (3Hz-26.5GHz)	7/21/2021	Annual	7/21/2022	MY54490576
Pasternack	NMLC-2	Line Conducted Emissions Cable (NM)	9/10/2021	Annual	9/10/2022	NMLC-2
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	8/3/2021	Annual	8/23/2022	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	5/25/2021	Annual	5/25/2022	100348
Sunol	J85	Bi-Log Antenna (30M - 5GHz)	7/27/2020	Biennial	7/27/2022	A051107

Table 6-1. Annual Test Equipment Calibration Schedule

Notes:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSMS906E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 10 of 129

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
FCC ID: A3LSMS906E
Method/System: Frequency Hopping Spread Spectrum (FHSS)
Number of Channels: 79

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(1)(iii)	RSS-247 [5.1(1)]	20dB Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
15.247(b)(1)	RSS-247 [5.4(2)]	Peak Transmitter Output Power	< 1 Watt if ≥ 75 non-overlapping channels used		PASS	Section 7.3
15.247(a)(1)	RSS-247 [5.1(2)]	Channel Separation	> 2/3 of 20 dB BW for systems with Output Power < 125mW		PASS	Section 7.5
15.247(a)(1)(iii)	RSS-247 [5.1(4)]	Number of Channels	> 15 Channels		PASS	Section 7.7
15.247(a)(1)(iii)	RSS-247 [5.1(4)]	Time of Occupancy	< 0.4 sec in 31.6 sec period		PASS	Section 7.6
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	Conducted > 20dBc		PASS	Section 7.4, Section 7.8
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-247 limits)	RADIATED	PASS	Section 7.9, Section 7.10, Section 7.11
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits (RSS-Gen [8.8] limits)	LINE CONDUCTED	PASS	Section 7.12

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "BT Auto," Version 3.5.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Automation," Version 1.3.1.

FCC ID: A3LSMS906E		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 11 of 129

7.2 20dB Bandwidth Measurement

§15.247 (a.1.iii); RSS-247 [5.1(1)]

Test Overview and Limit

The bandwidth at 20dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

Test Procedure Used

ANSI C63.10-2013 – Section 6.9.2

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 20dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 20. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% OBW
3. VBW $\geq 3 \times$ RBW
4. Reference level set to keep signal from exceeding maximum input mixer level for linear operation.
5. Detector = Peak
6. Trace mode = max hold
7. Sweep = auto couple
8. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: A3LSMS906E		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 12 of 129

Antenna 1

Frequency [MHz]	Data Rate [Mbps]	Power Scheme	Channel No.	20dB Bandwidth Test Results [kHz]
2402	1.0	ePA	0	843.90
2441	1.0	ePA	39	936.30
2480	1.0	ePA	78	934.90
2402	2.0	ePA	0	1318.00
2441	2.0	ePA	39	1313.00
2480	2.0	ePA	78	1315.00
2402	3.0	ePA	0	1280.00
2441	3.0	ePA	39	1350.00
2480	3.0	ePA	78	1287.00

Table 7-2. Conducted 20dB Bandwidth Measurements Antenna 1




Plot 7-1. 20dB Bandwidth Plot (Bluetooth, 1Mbps – Ch. 0) Antenna 1

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 13 of 129




Plot 7-2. 20dB Bandwidth Plot (Bluetooth, 1Mbps – Ch. 39) Antenna 1

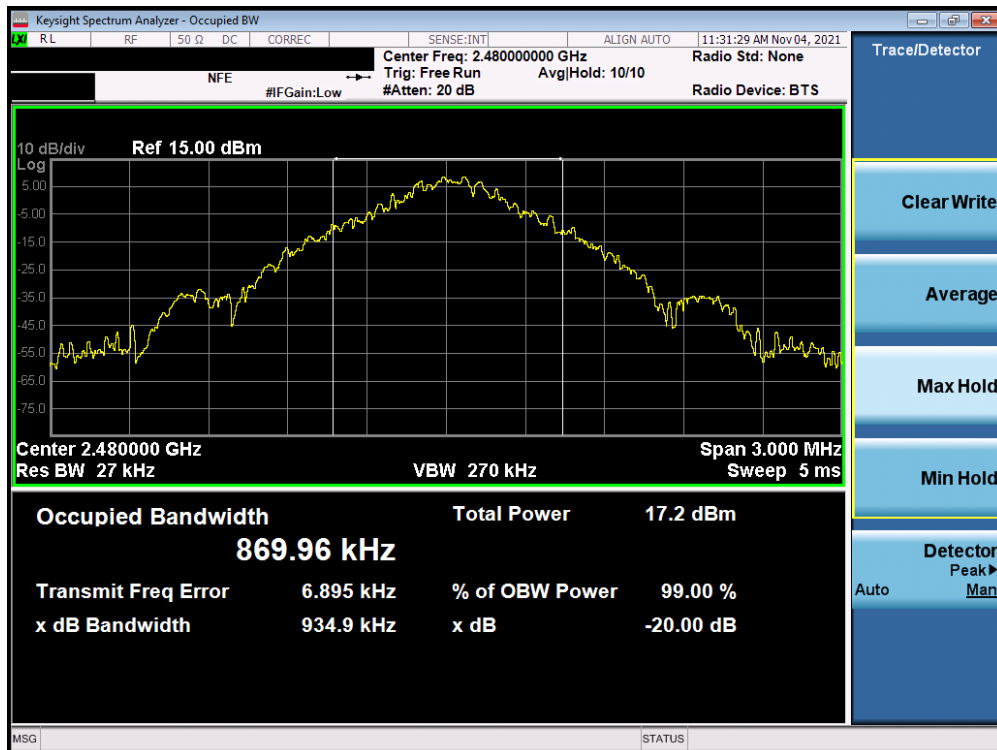


Plot 7-3. 20dB Bandwidth Plot (Bluetooth, 1Mbps – Ch. 78) Antenna 1

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 14 of 129

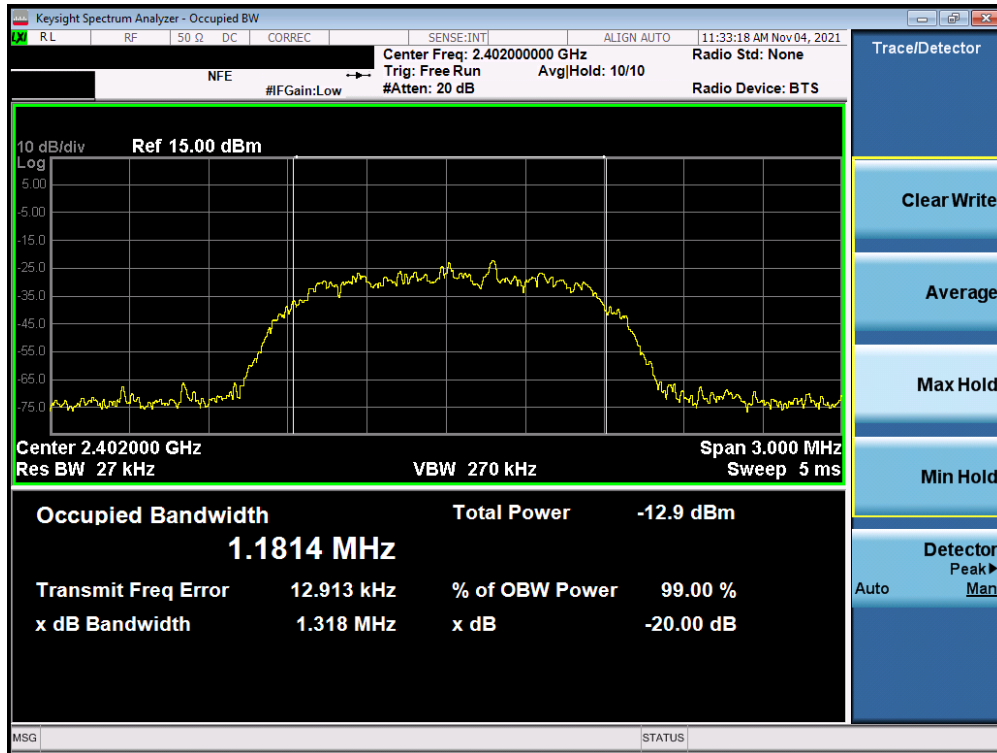


Plot 7-4. 20dB Bandwidth Plot (Bluetooth, 2Mbps – Ch. 0) Antenna 1

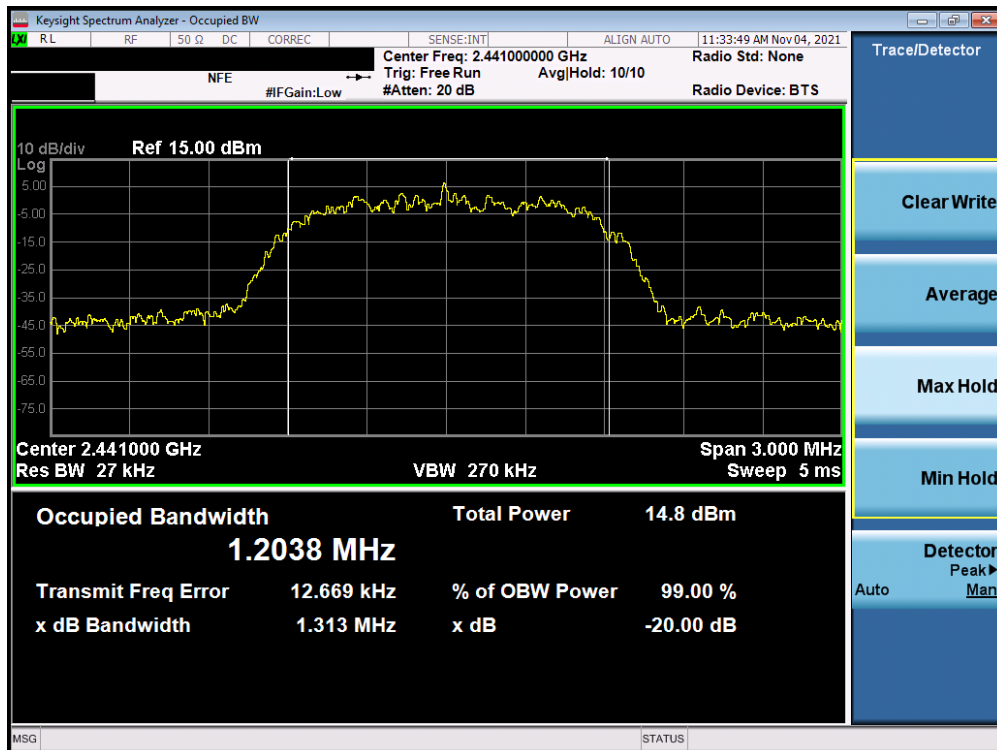


Plot 7-5. 20dB Bandwidth Plot (Bluetooth, 2Mbps – Ch. 39) Antenna 1

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 15 of 129

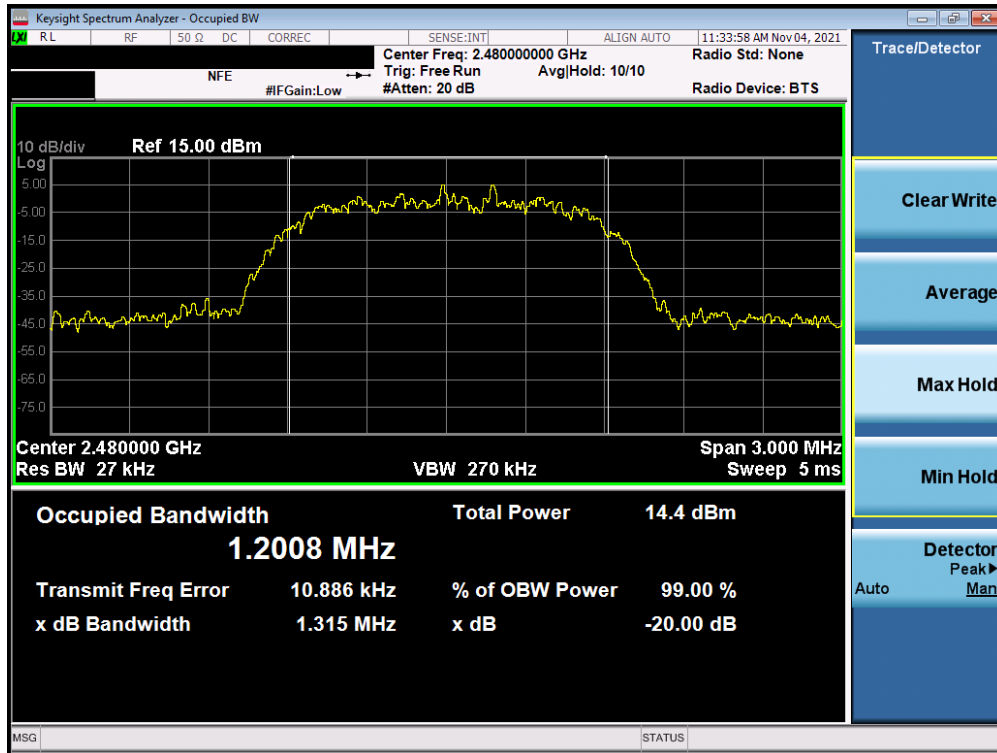


Plot 7-6. 20dB Bandwidth Plot (Bluetooth, 2Mbps – Ch. 78) Antenna 1

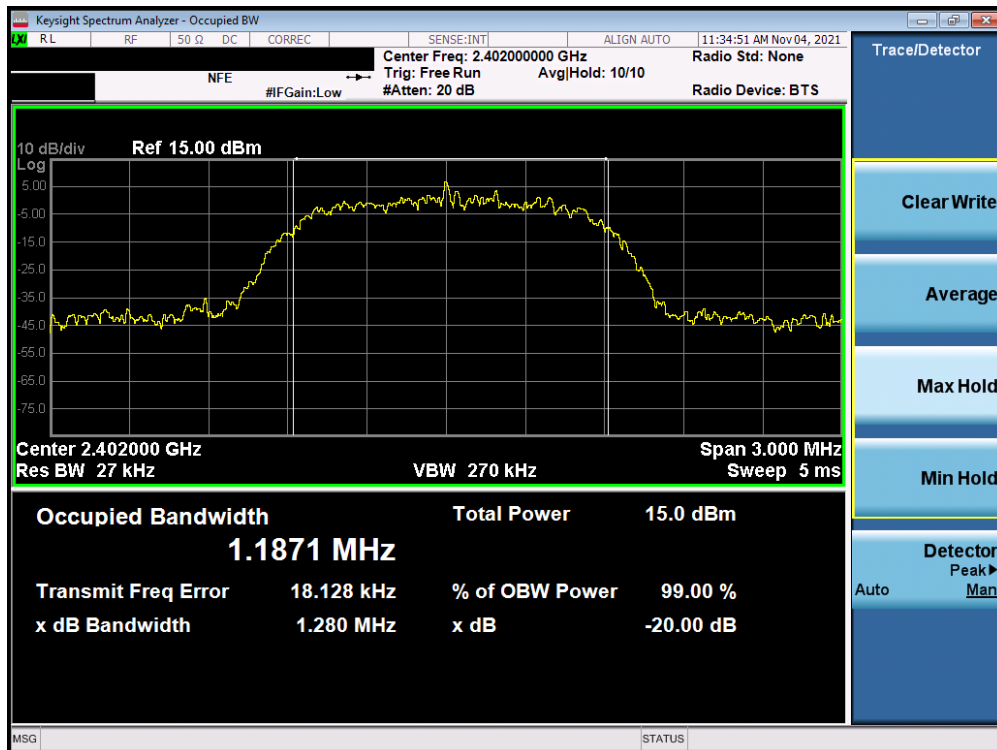


Plot 7-7. 20dB Bandwidth Plot (Bluetooth, 3Mbps – Ch. 0) Antenna 1

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 16 of 129

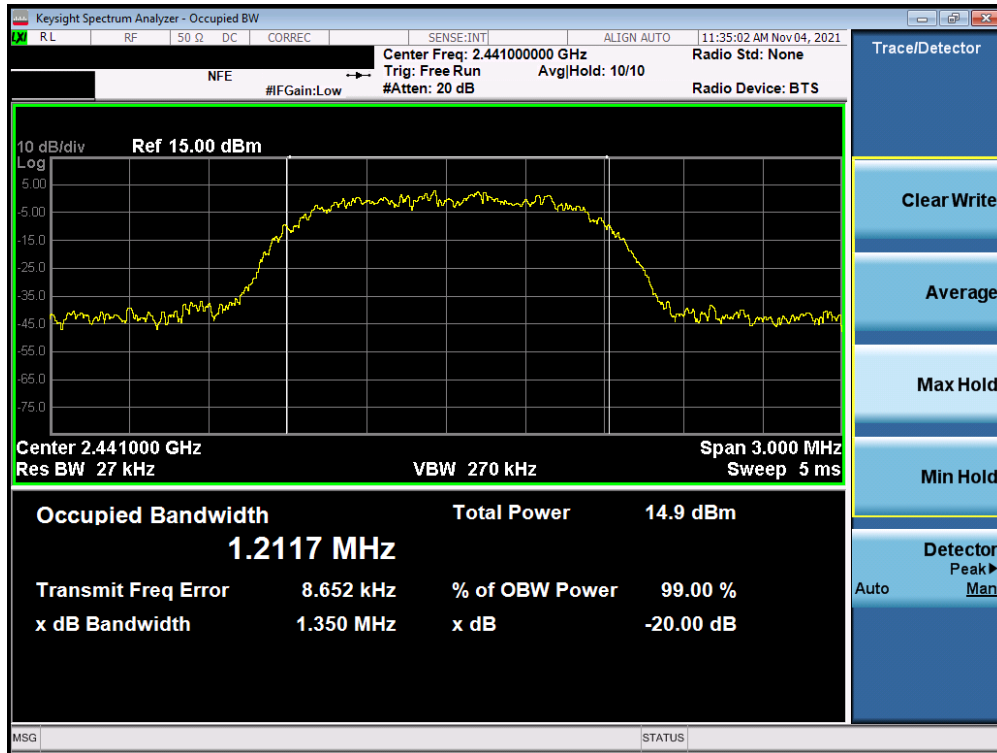

Plot 7-8. 20dB Bandwidth Plot (Bluetooth, 3Mbps – Ch. 39) Antenna 1

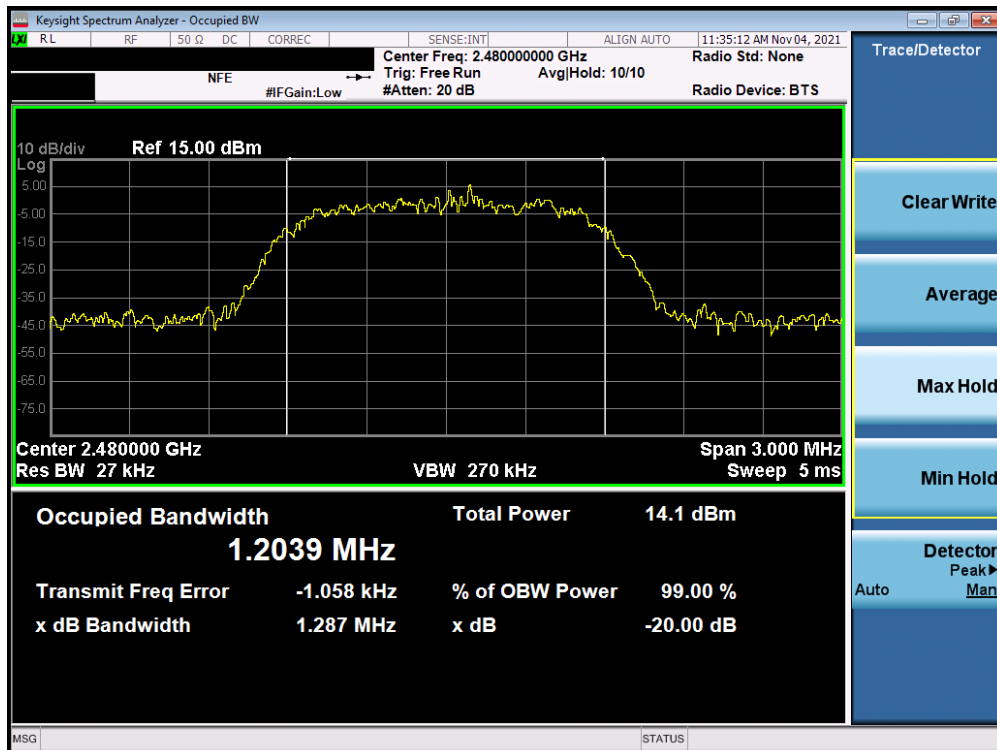

Plot 7-9. 20dB Bandwidth Plot (Bluetooth, 3Mbps – Ch. 78) Antenna 1

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 17 of 129

Antenna 2


Frequency [MHz]	Data Rate [Mbps]	Power Scheme	Channel No.	20dB Bandwidth Test Results [kHz]
2402	1.0	ePA	0	1530.00
2441	1.0	ePA	39	986.60
2480	1.0	ePA	78	1003.00
2402	2.0	ePA	0	1336.00
2441	2.0	ePA	39	1324.00
2480	2.0	ePA	78	1329.00
2402	3.0	ePA	0	1295.00
2441	3.0	ePA	39	1350.00
2480	3.0	ePA	78	1296.00

Table 7-3. Conducted 20dB Bandwidth Measurements Antenna 2




Plot 7-10. 20dB Bandwidth Plot (Bluetooth, 1Mbps – Ch. 0) Antenna 2

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 18 of 129

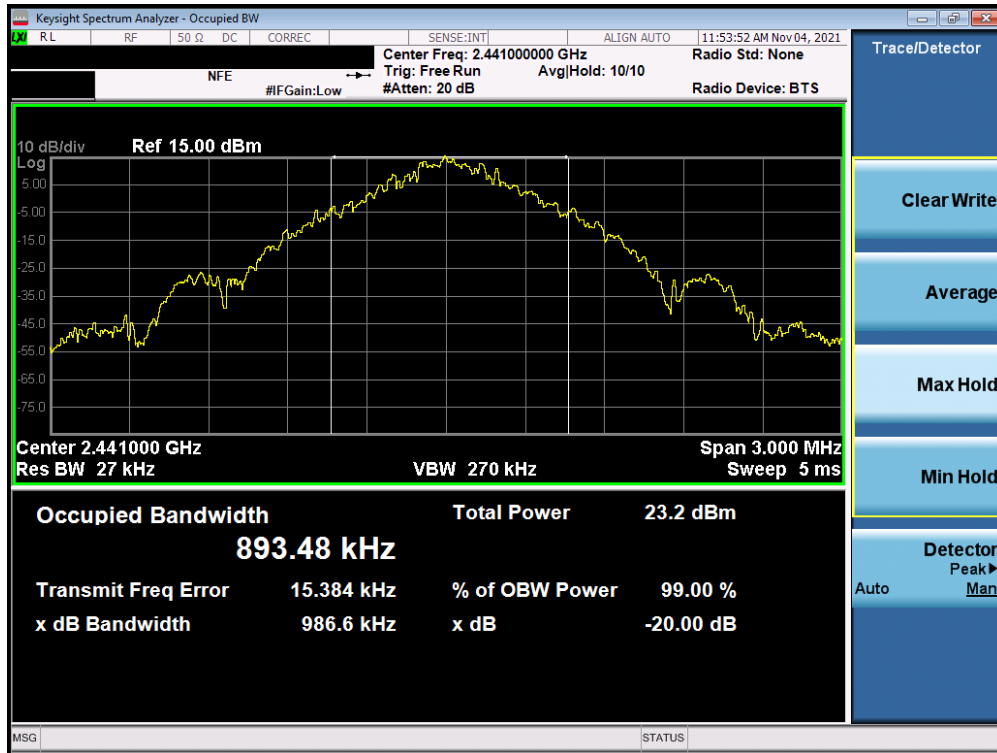


Plot 7-11. 20dB Bandwidth Plot (Bluetooth, 1Mbps – Ch. 39) Antenna 2

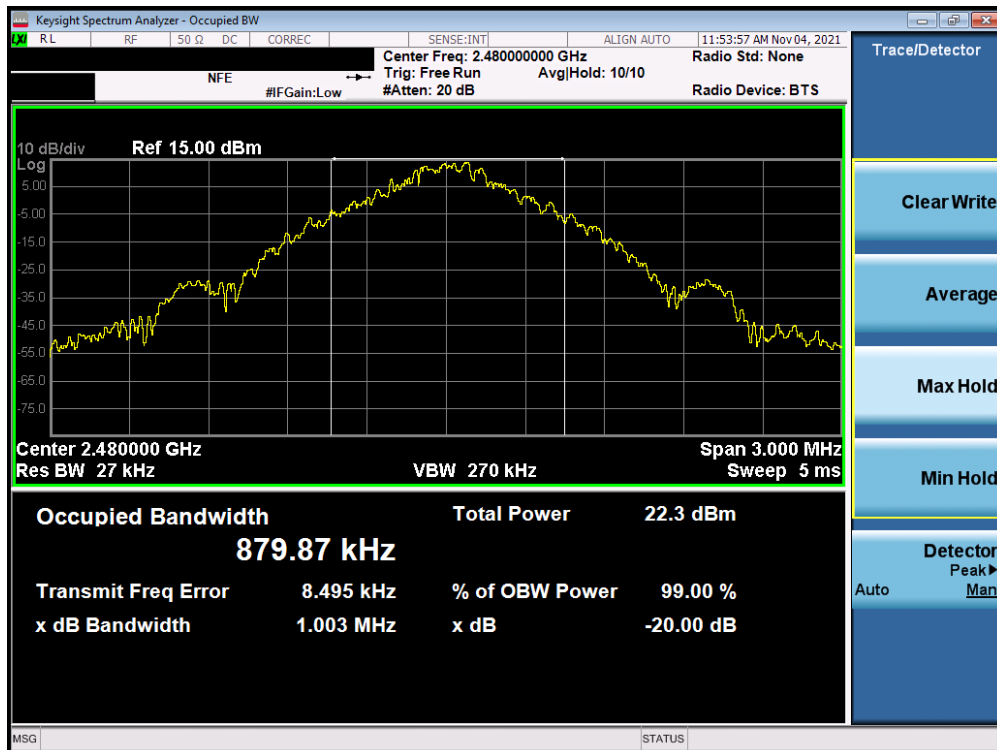


Plot 7-12. 20dB Bandwidth Plot (Bluetooth, 1Mbps – Ch. 78) Antenna 2

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 19 of 129

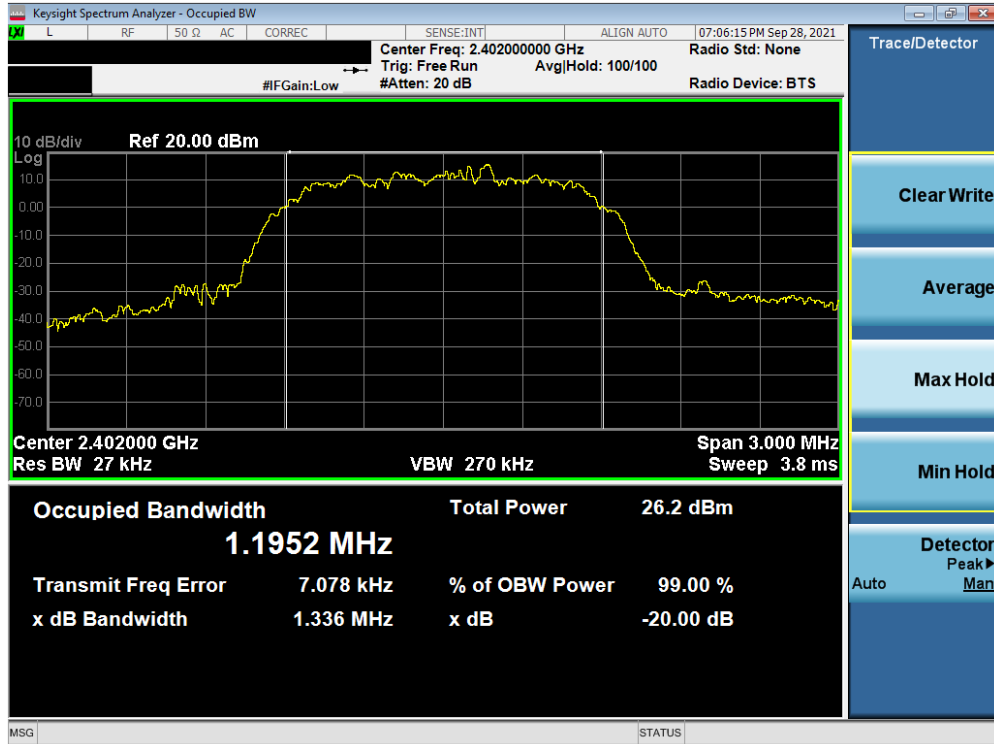


Plot 7-13. 20dB Bandwidth Plot (Bluetooth, 2Mbps – Ch. 0) Antenna 2

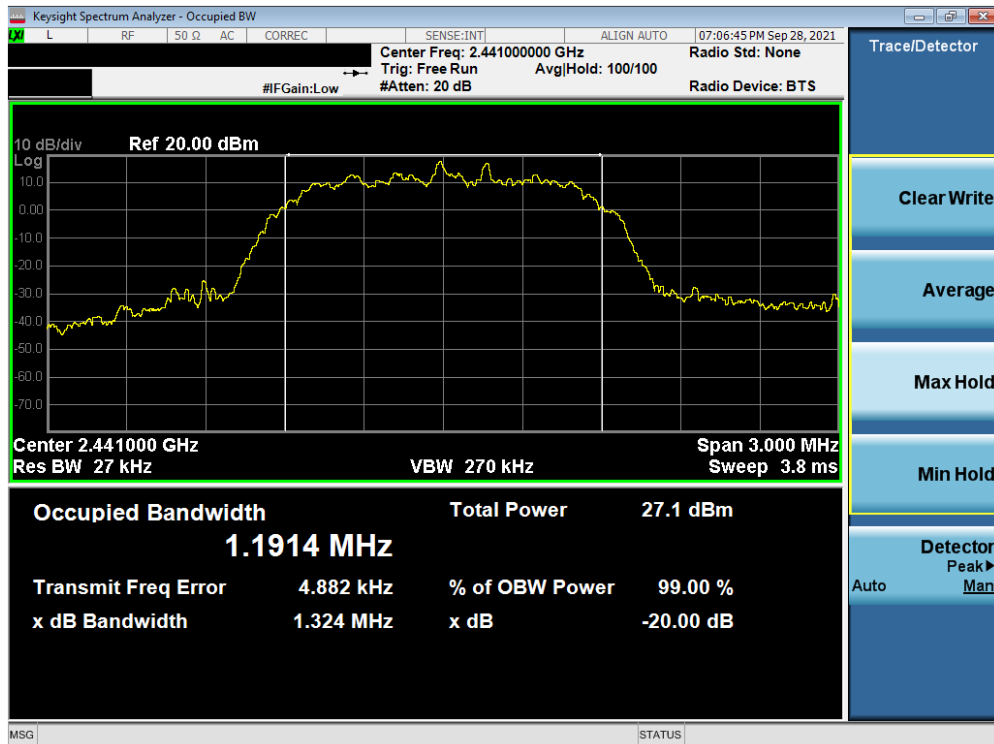


Plot 7-14. 20dB Bandwidth Plot (Bluetooth, 2Mbps – Ch. 39) Antenna 2

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 20 of 129

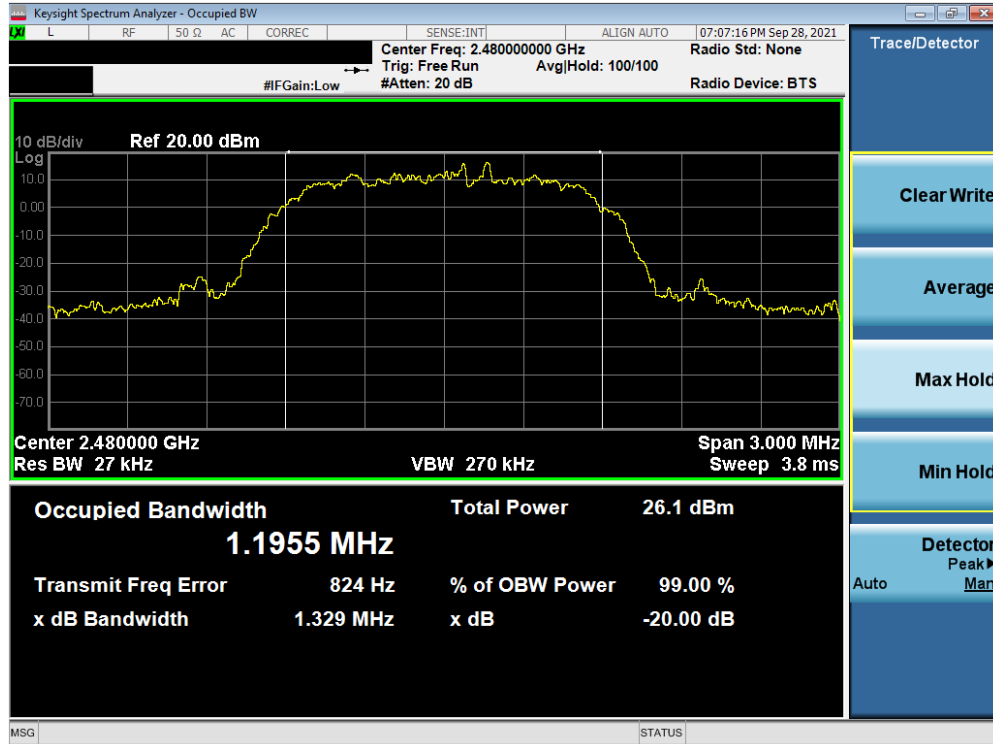


Plot 7-15. 20dB Bandwidth Plot (Bluetooth, 2Mbps – Ch. 78) Antenna 2

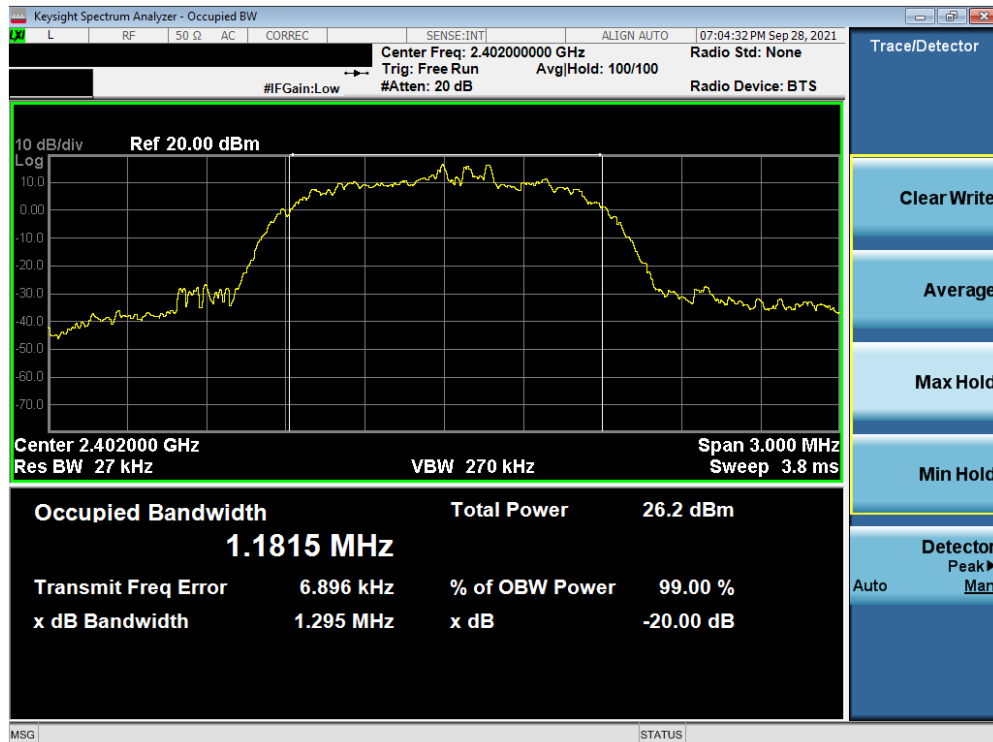


Plot 7-16. 20dB Bandwidth Plot (Bluetooth, 3Mbps – Ch. 0) Antenna 2

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 21 of 129

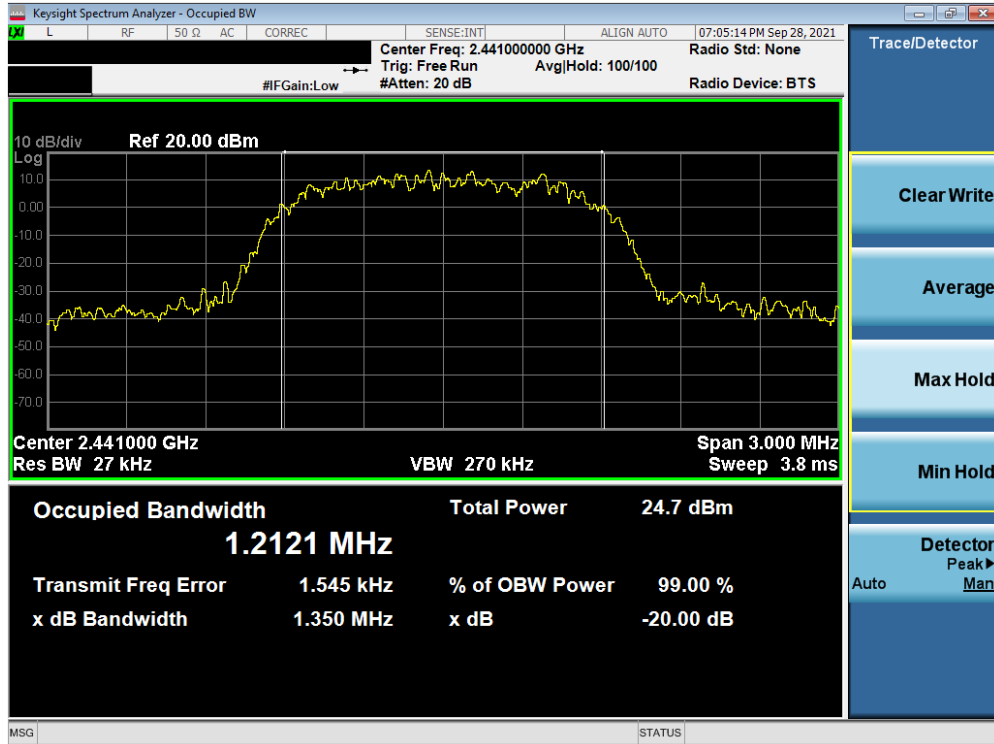

Plot 7-17. 20dB Bandwidth Plot (Bluetooth, 3Mbps – Ch. 39) Antenna 2

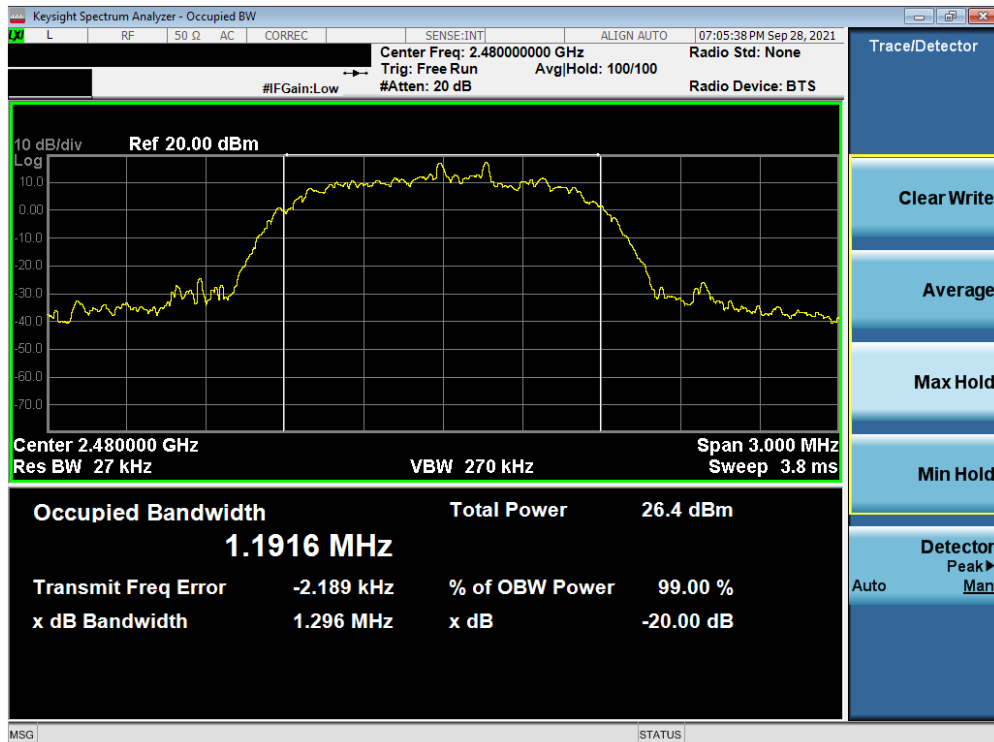

Plot 7-18. 20dB Bandwidth Plot (Bluetooth, 3Mbps – Ch. 78) Antenna 2

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 22 of 129

7.3 Output Power Measurement

§15.247 (b.1); RSS-247 [5.4(2)]

Test Overview and Limits

Measurement is made while the EUT is operating in non-hopping transmission mode. The powers shown below were measured using a spectrum analyzer with a Bluetooth signaling test set (Agilent Model: N4010A) used only to maintain a Bluetooth link with the EUT. Average power measurements are performed using the analyzer's "burst power" function with RBW = 3MHz. The burst power function triggers on a single set burst set to maximum power and measures the maximum average power on the on-time.

The maximum permissible output power is 1 Watt.

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.5

ANSI C63.10-2013 – Section 11.9.2.3.2 method AVGPM-G

Test Settings

Peak Power Measurement

1. Span = approximately 5x 20dB bandwidth, centered on hopping channel
2. RBW > 20dB bandwidth of emission being measured
3. VBW ≥ RBW
4. Sweep = auto
5. Detector = peak
6. Trace mode = max hold
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Note

This unit was tested with all possible data rates and the highest peak power is reported with the unit transmitting at N/AMbps. Final results were obtained using calibrated couplers, attenuators and cables. The following formula was used:

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 23 of 129


Output Power (dBm) = Raw Analyzer Level (dBm) + Cable Loss (dB) + Loss in Directional Coupler/Insertion Loss (dB)

Antenna 1


Frequency [MHz]	Data Rate [Mbps]	Power Scheme	Channel No.	Peak Conducted Power		Avg Conducted Power	
				[dBm]	[mW]	[dBm]	[mW]
2402	1.0	ePA	0	18.87	77.126	17.85	60.890
2441	1.0	ePA	39	18.91	77.732	18.26	66.918
2480	1.0	ePA	78	18.10	64.506	17.15	51.880
2402	1.0	iPA	0	13.26	21.188	11.81	15.174
2441	1.0	iPA	39	13.29	21.340	11.95	15.666
2480	1.0	iPA	78	12.62	18.281	11.29	13.462
2402	2.0	ePA	0	19.67	92.619	16.38	43.430
2441	2.0	ePA	39	19.98	99.632	17.36	54.411
2480	2.0	ePA	78	19.22	83.637	15.97	39.535
2402	2.0	iPA	0	10.96	12.462	8.40	6.918
2441	2.0	iPA	39	10.98	12.543	8.60	7.244
2480	2.0	iPA	78	10.24	10.563	7.74	5.943
2402	3.0	ePA	0	19.84	96.294	16.45	44.135
2441	3.0	ePA	39	20.49	111.944	17.47	55.788
2480	3.0	ePA	78	19.45	88.105	15.90	38.874
2402	3.0	iPA	0	11.37	13.699	8.47	7.031
2441	3.0	iPA	39	11.45	13.957	8.68	7.379
2480	3.0	iPA	78	10.62	11.527	7.83	6.067

Table 7-4. Conducted Output Power Measurements Antenna 1

FCC ID: A3LSMS906E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 24 of 129

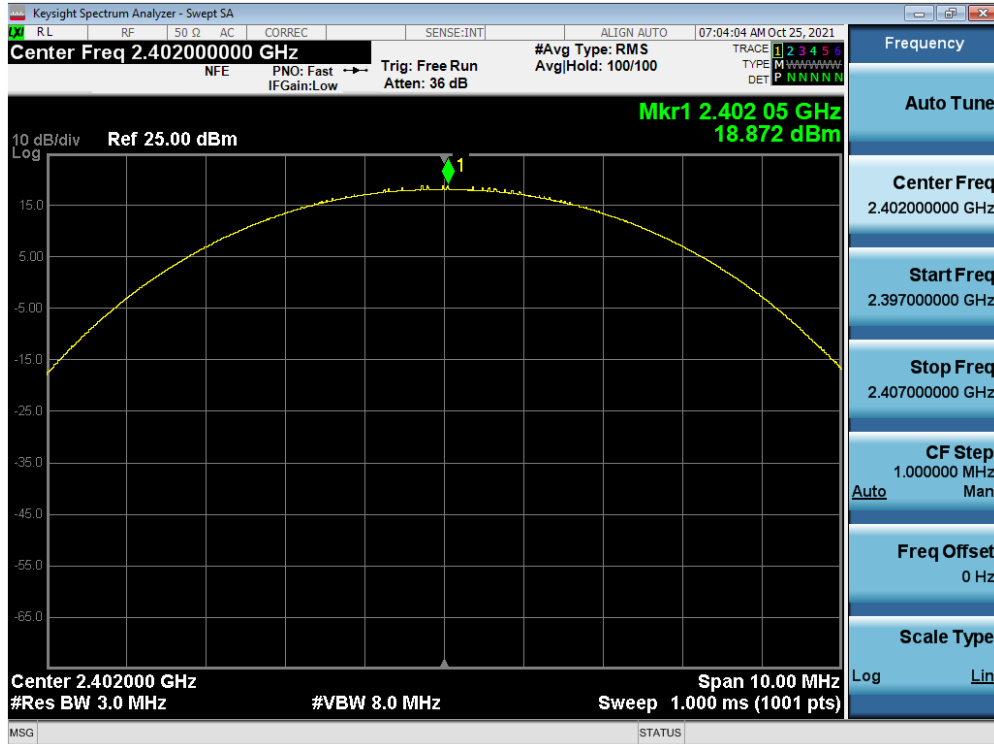


Plot 7-19. Peak Conducted Power (1Mbps – Ch. 0) Antenna 1 ePA

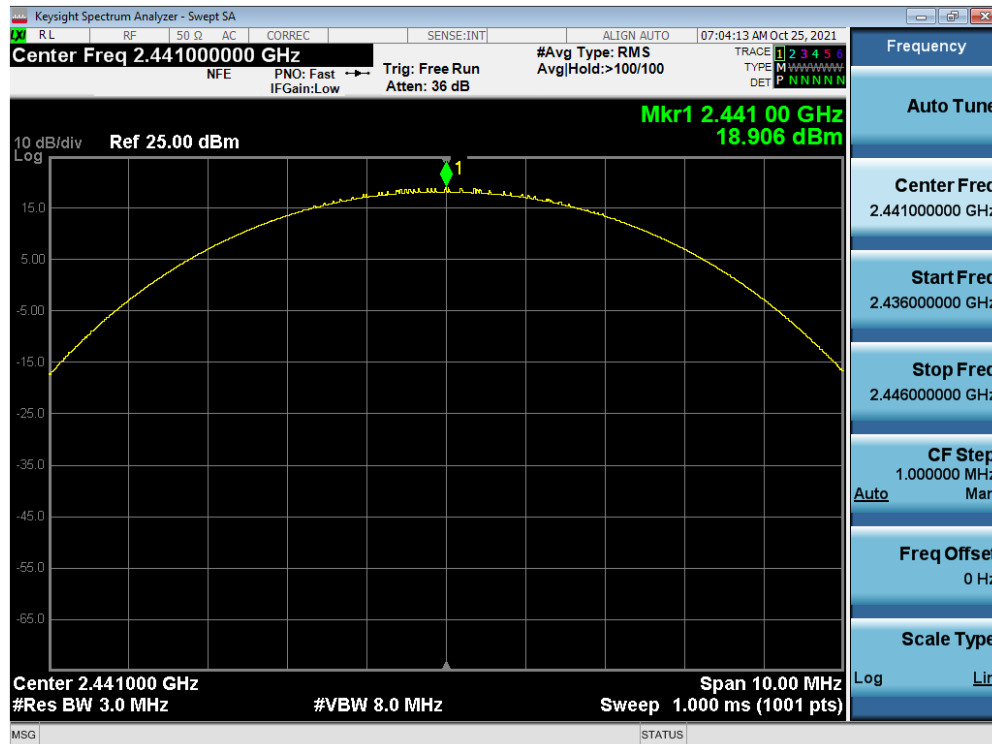

Plot 7-20. Peak Conducted Power (1Mbps – Ch. 39) Antenna 1 ePA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 25 of 129

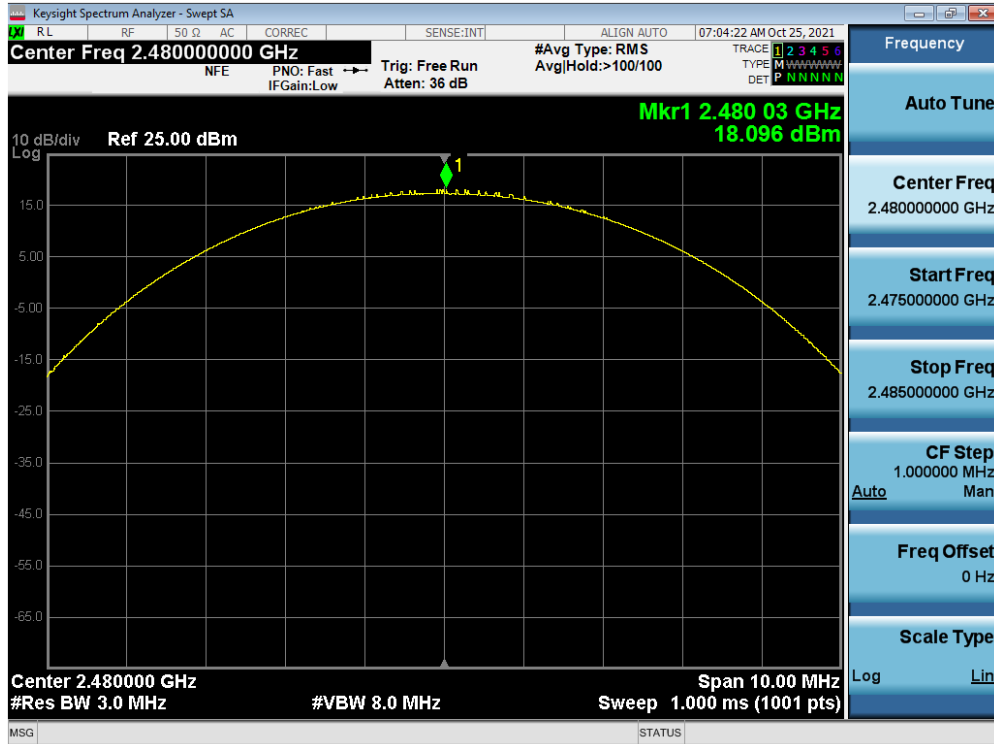


Plot 7-21. Peak Conducted Power (1Mbps – Ch. 78) Antenna 1 ePA




Plot 7-22. Peak Conducted Power (1Mbps – Ch. 0) Antenna 1 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 26 of 129

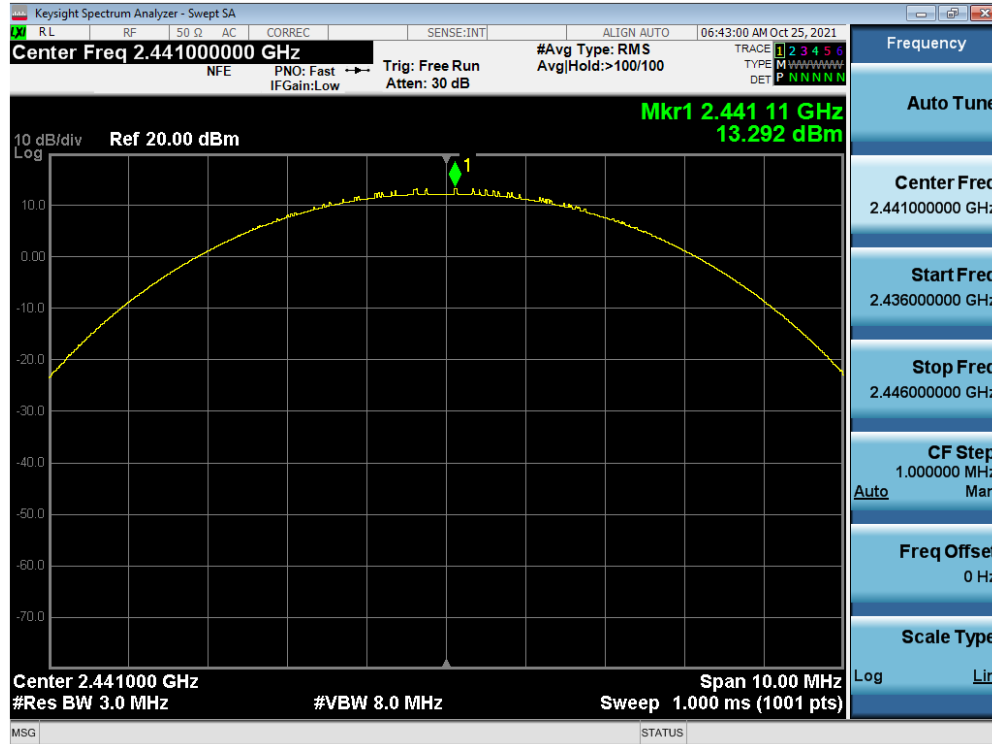


Plot 7-23. Peak Conducted Power (1Mbps – Ch. 39) Antenna 1 iPA

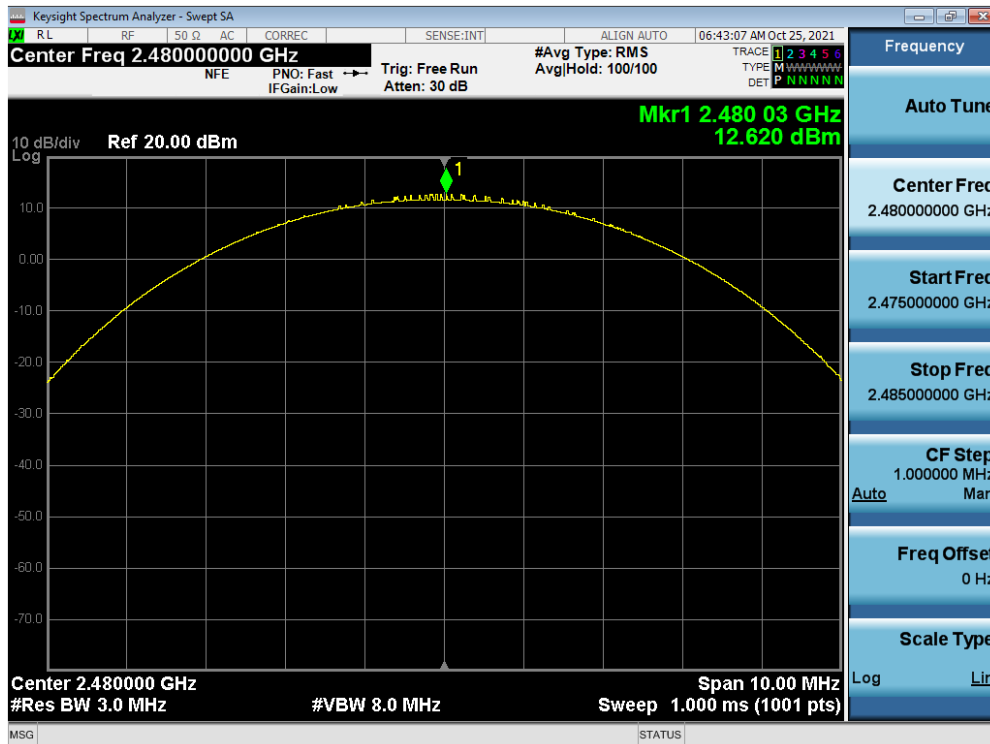


Plot 7-24. Peak Conducted Power (1Mbps – Ch. 78) Antenna 1 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 27 of 129

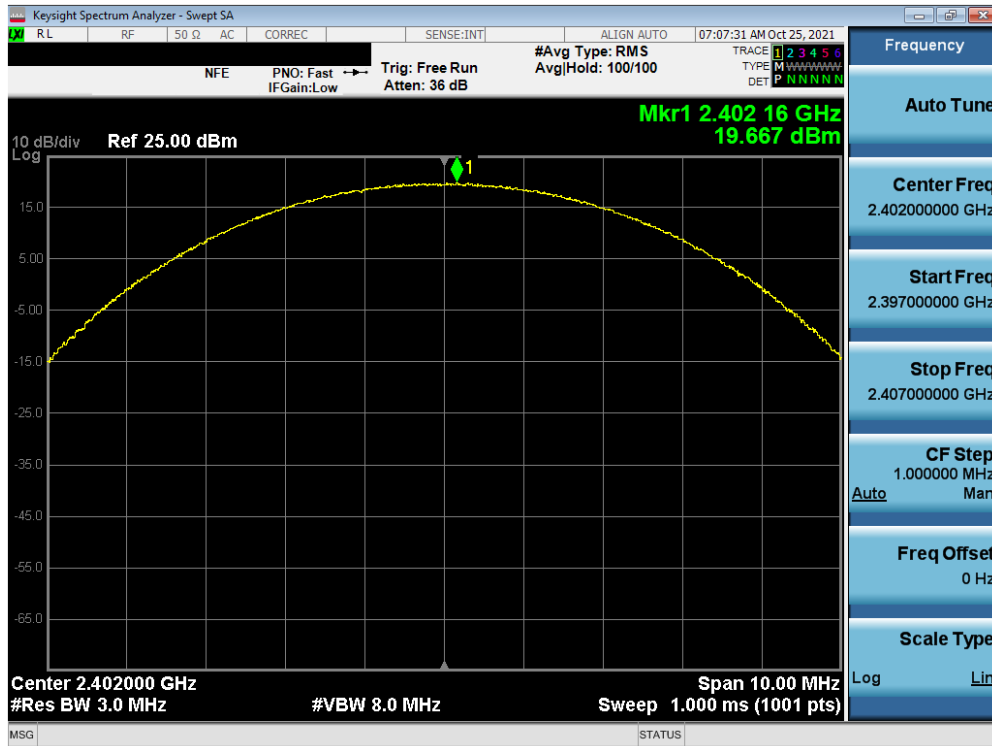


Plot 7-25. Peak Conducted Power (2Mbps – Ch. 0) Antenna 1 ePA

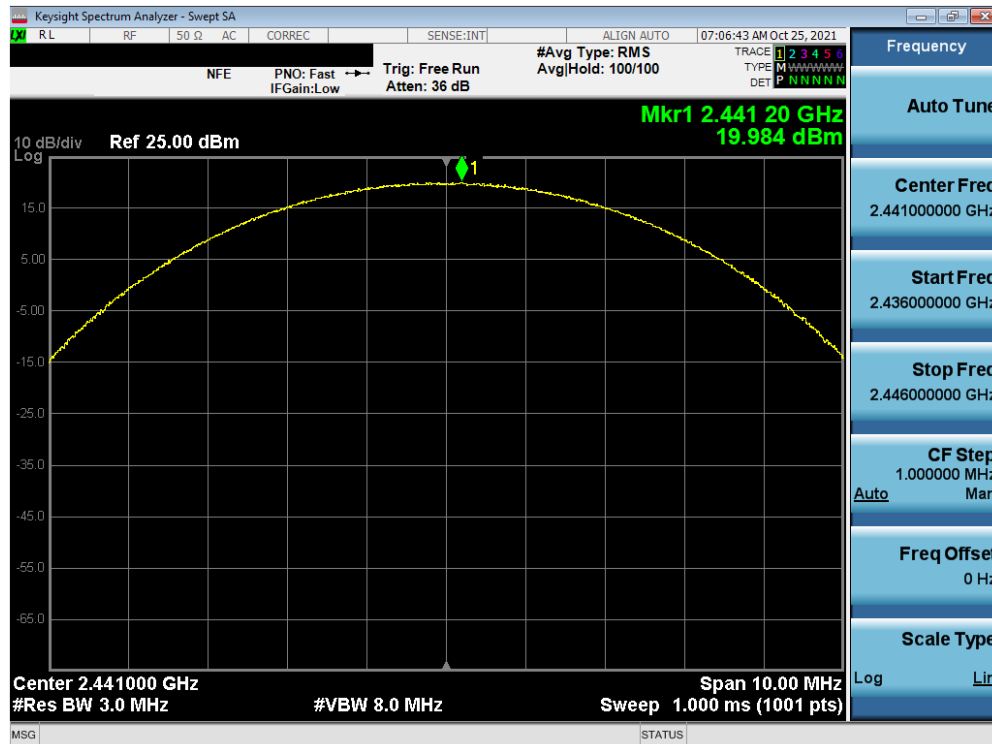


Plot 7-26. Peak Conducted Power (2Mbps – Ch. 39) Antenna 1 ePA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 28 of 129

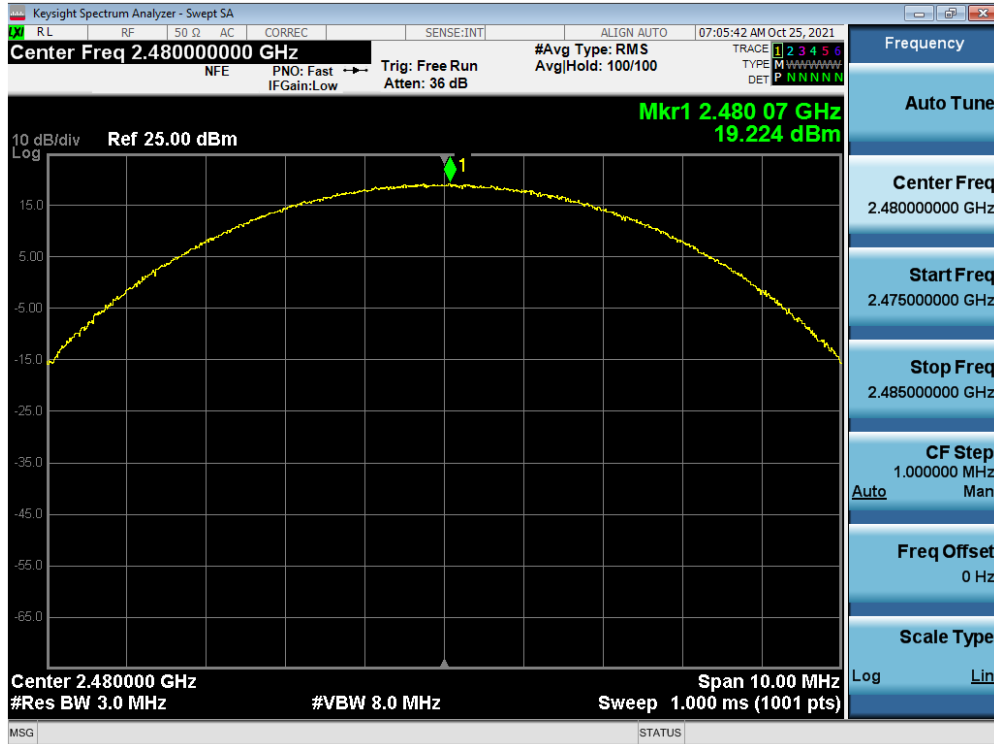


Plot 7-27. Peak Conducted Power (2Mbps – Ch. 78) Antenna 1 ePA

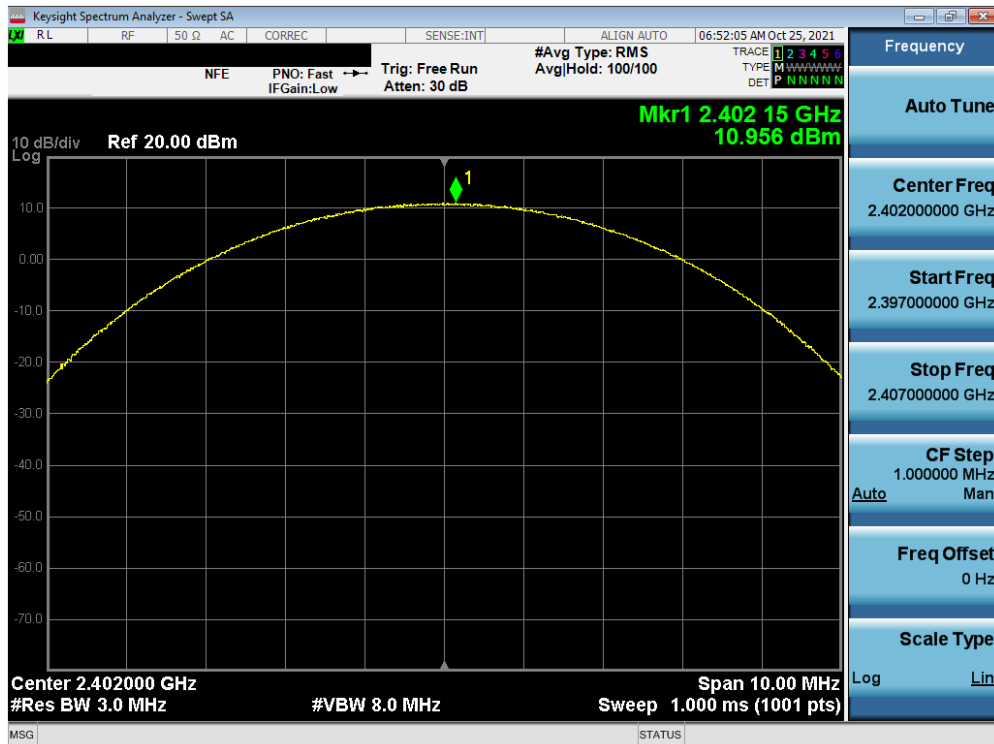


Plot 7-28. Peak Conducted Power (2Mbps – Ch. 0) Antenna 1 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 29 of 129

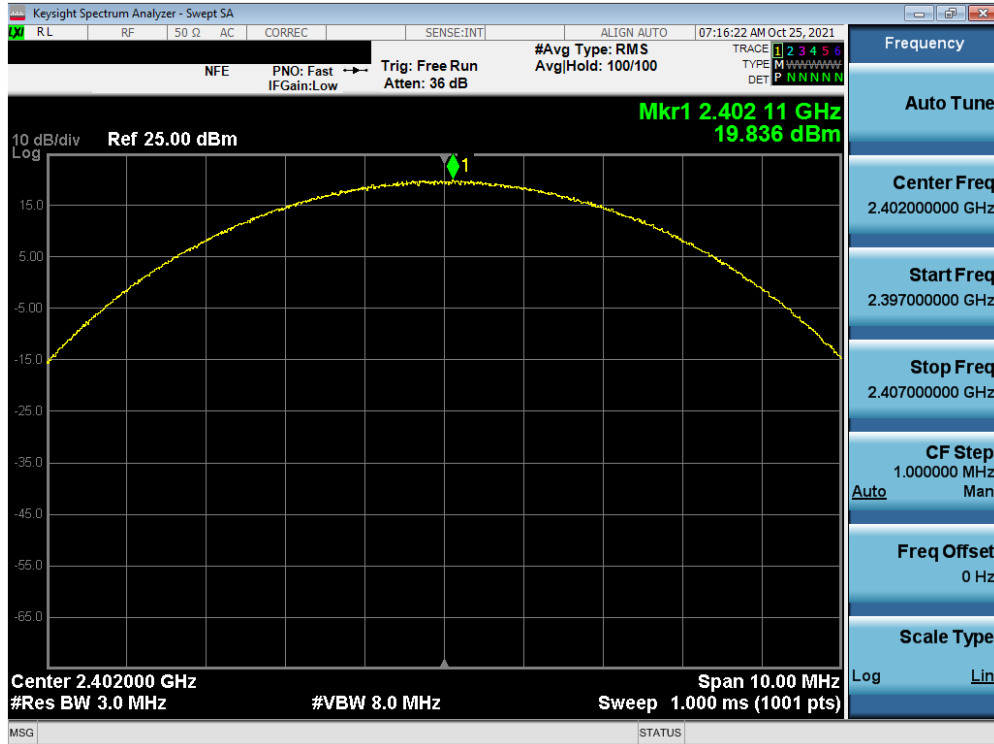


Plot 7-31. Peak Conducted Power (3Mbps – Ch. 0) Antenna 1 ePA

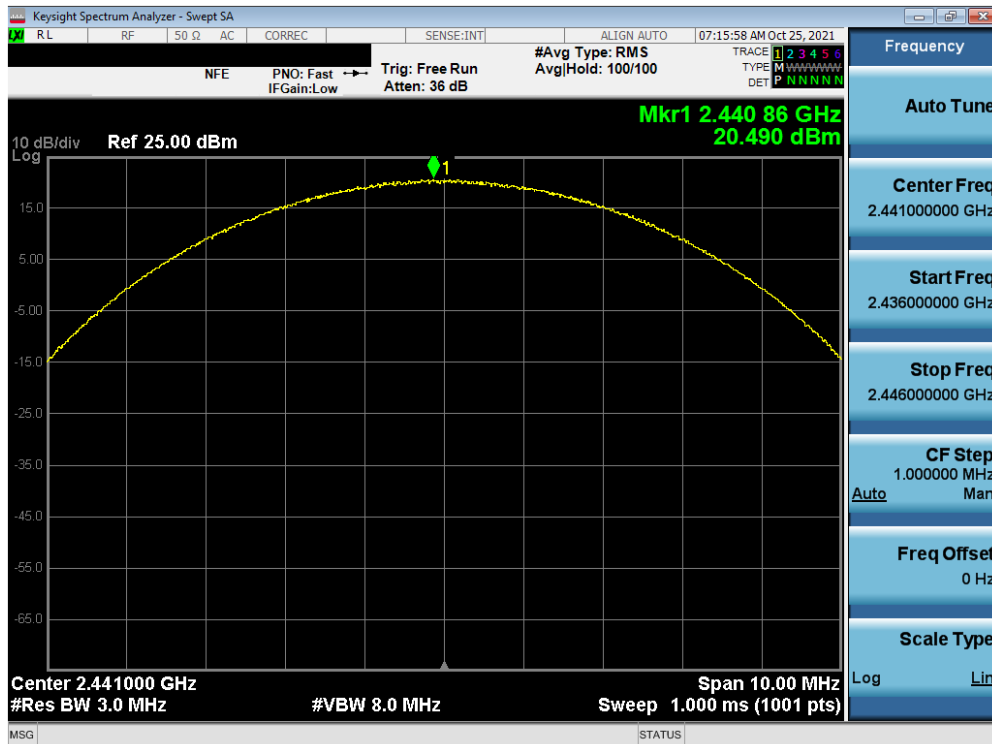


Plot 7-32. Peak Conducted Power 32Mbps – Ch. 39) Antenna 1 ePA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 31 of 129

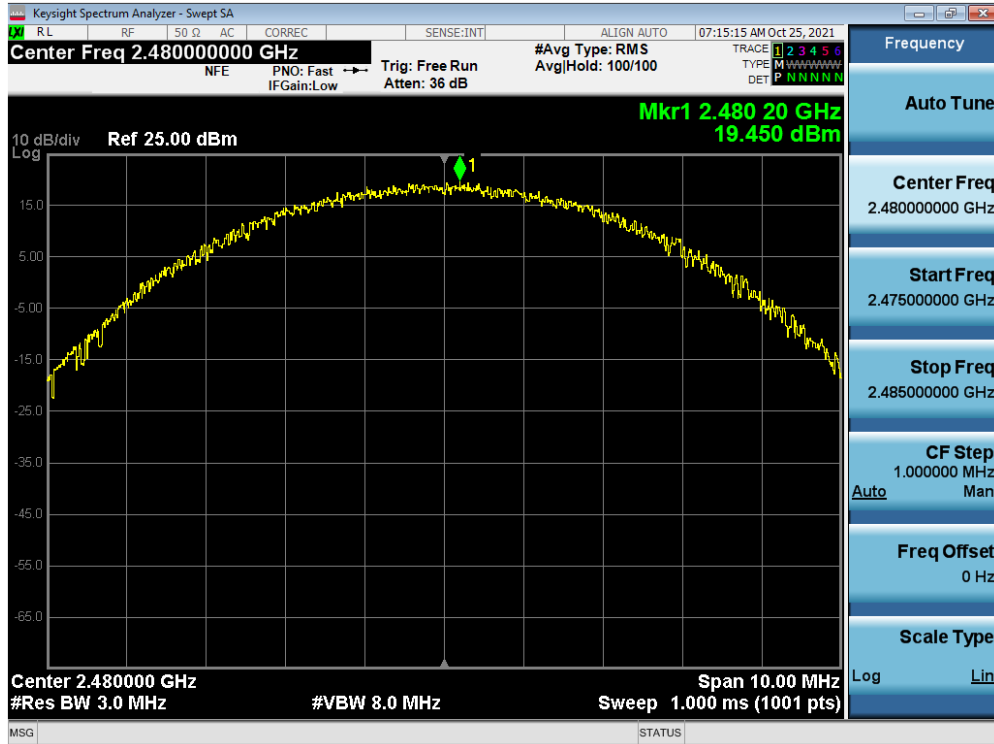


Plot 7-33. Peak Conducted Power (3Mbps – Ch. 78) Antenna 1 ePA

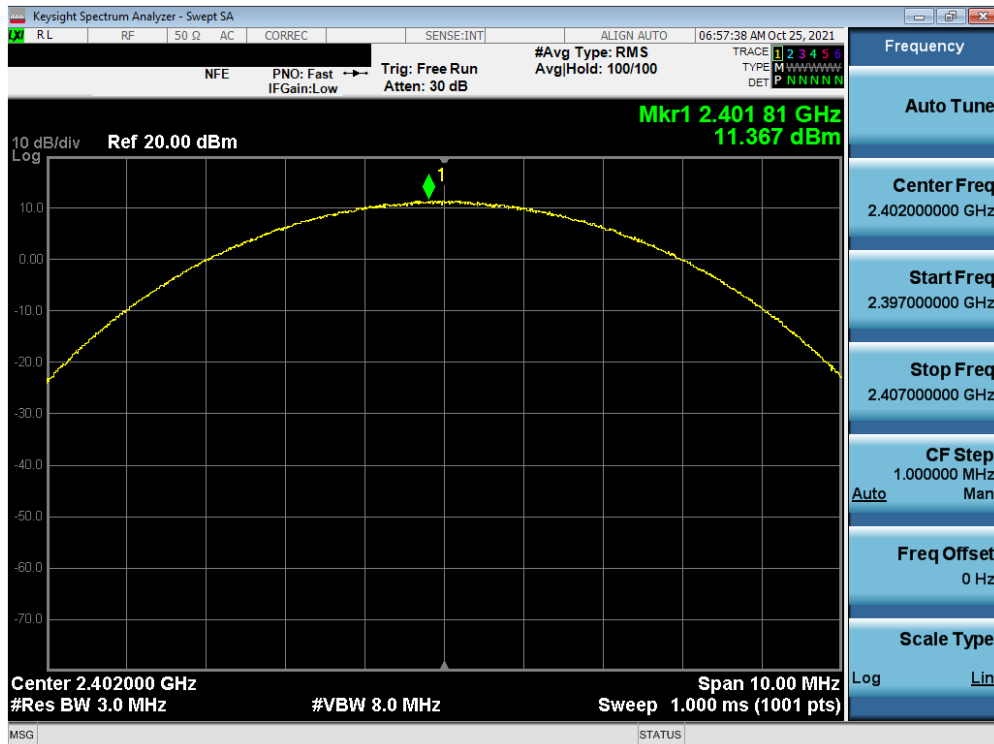


Plot 7-34. Peak Conducted Power (3Mbps – Ch. 0) Antenna 1 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 32 of 129

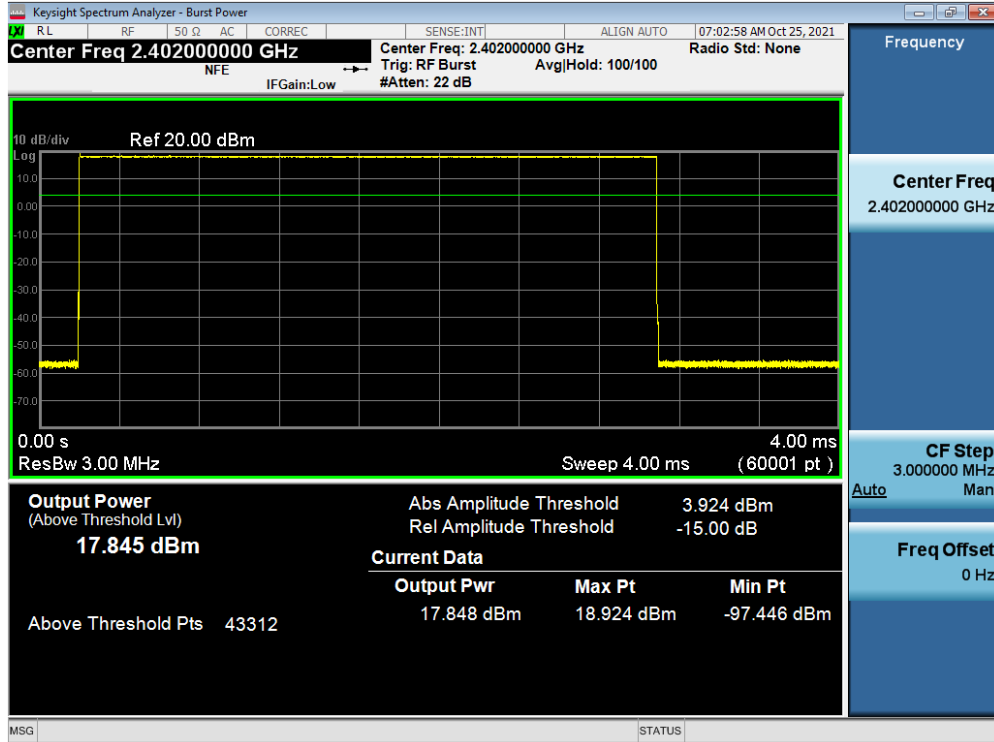


Plot 7-37. Average Conducted Power (1Mbps – Ch. 0) Antenna 1 ePA

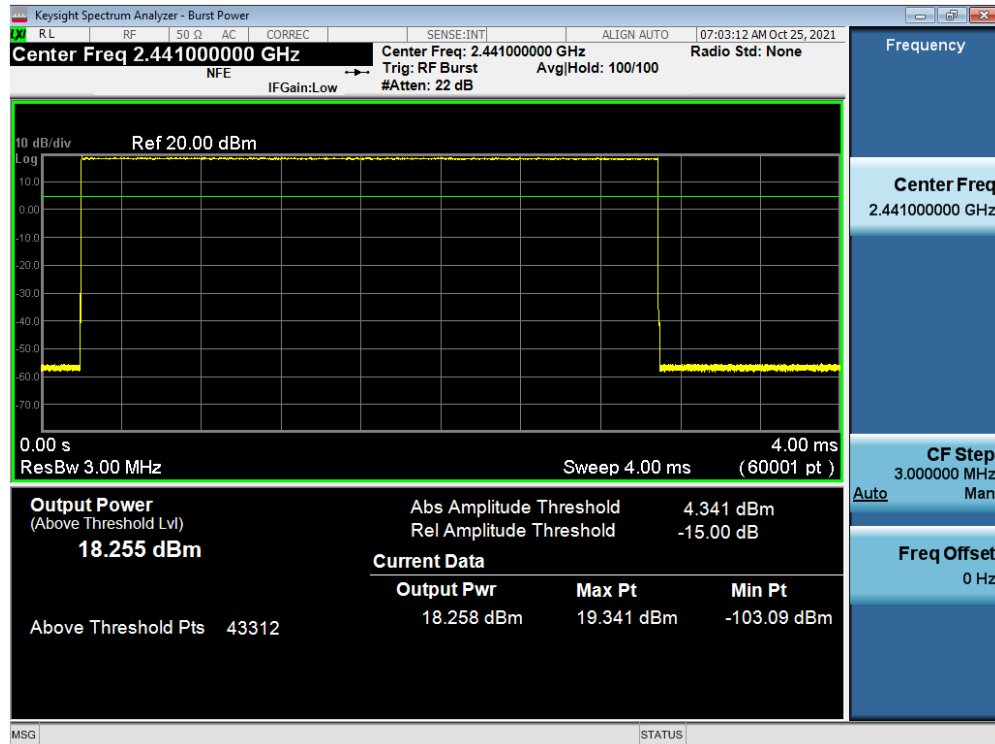


Plot 7-38. Average Conducted Power (1Mbps – Ch. 39) Antenna 1 ePA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 34 of 129

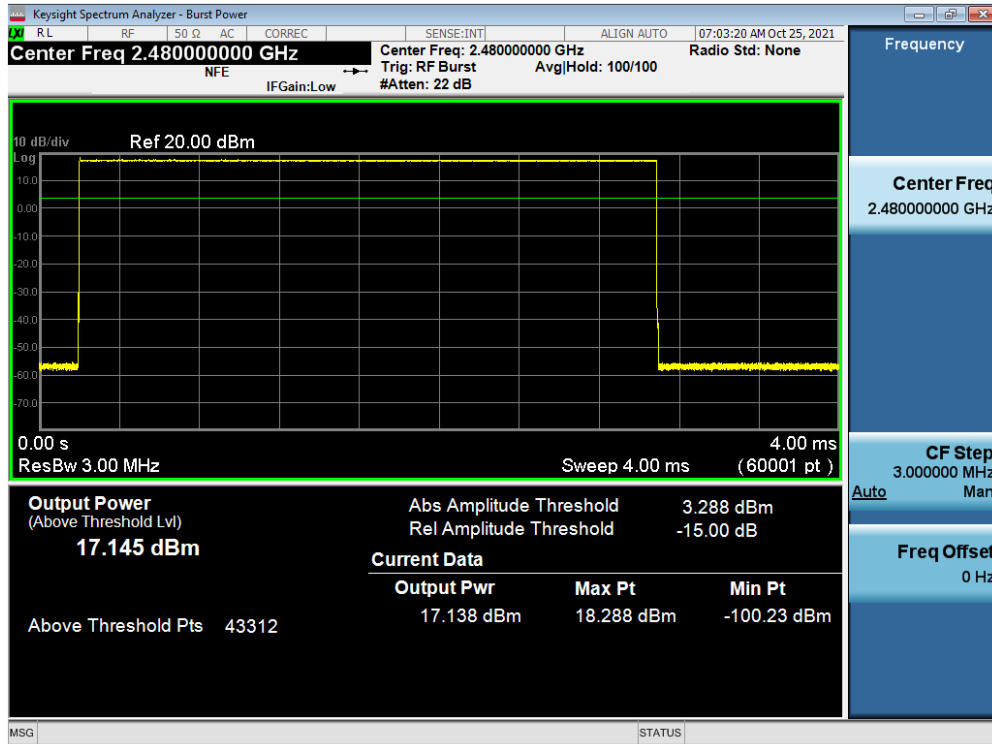


Plot 7-39. Average Conducted Power (1Mbps – Ch. 78) Antenna 1 ePA

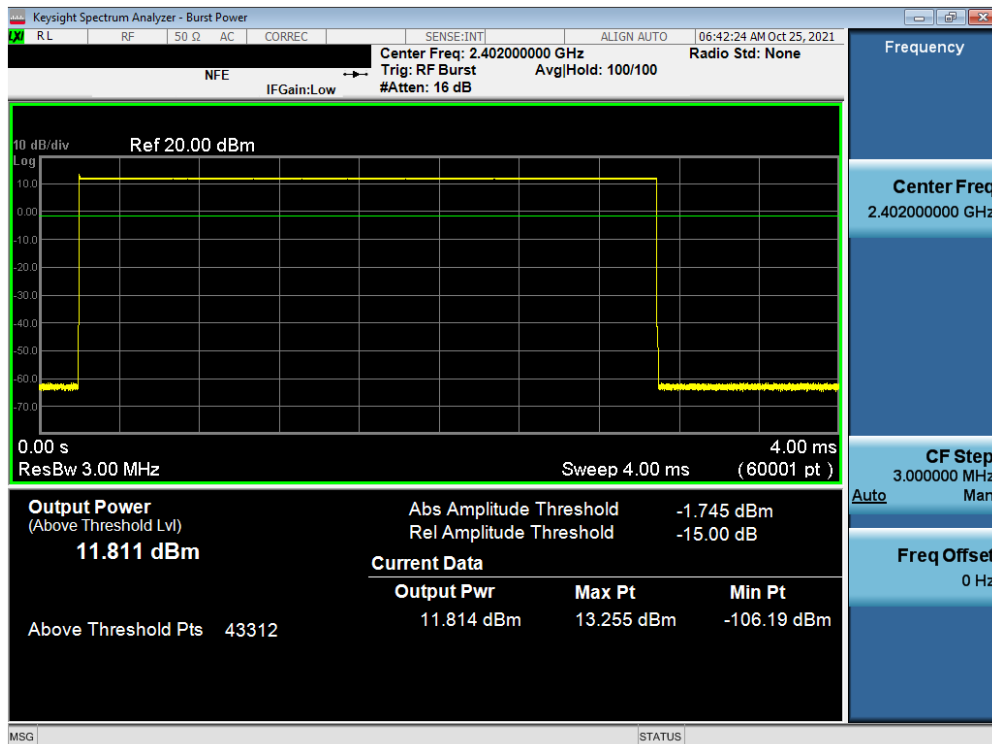


Plot 7-40. Average Conducted Power (1Mbps – Ch. 0) Antenna 1 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 35 of 129

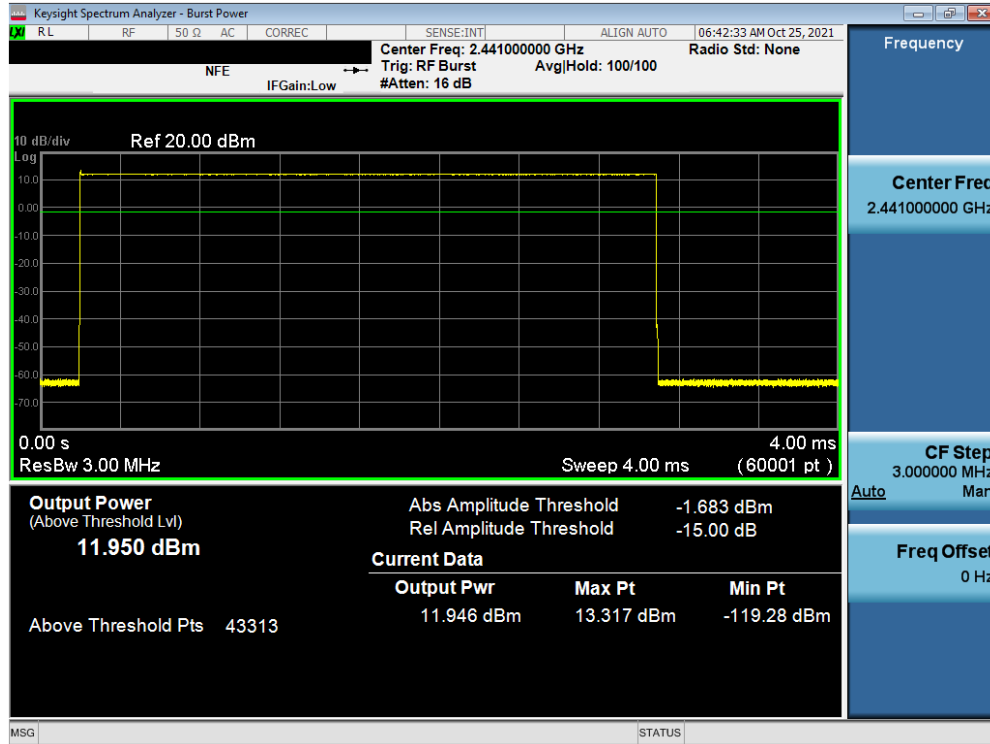


Plot 7-41. Average Conducted Power (1Mbps – Ch. 39) Antenna 1 iPA

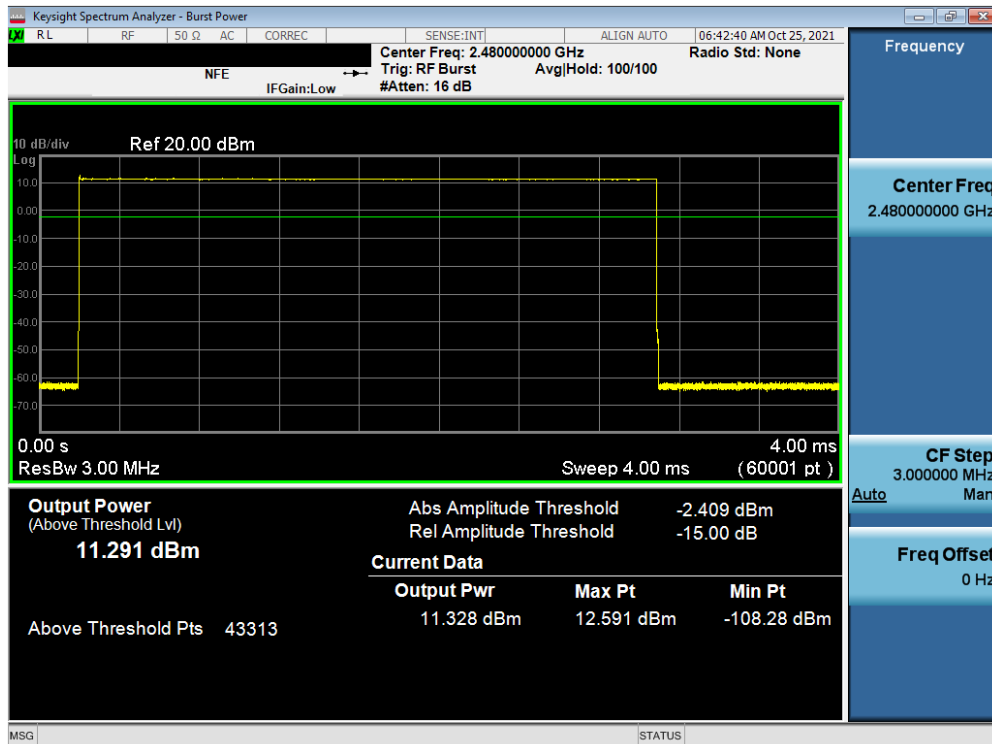


Plot 7-42. Average Conducted Power (1Mbps – Ch. 78) Antenna 1 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 36 of 129

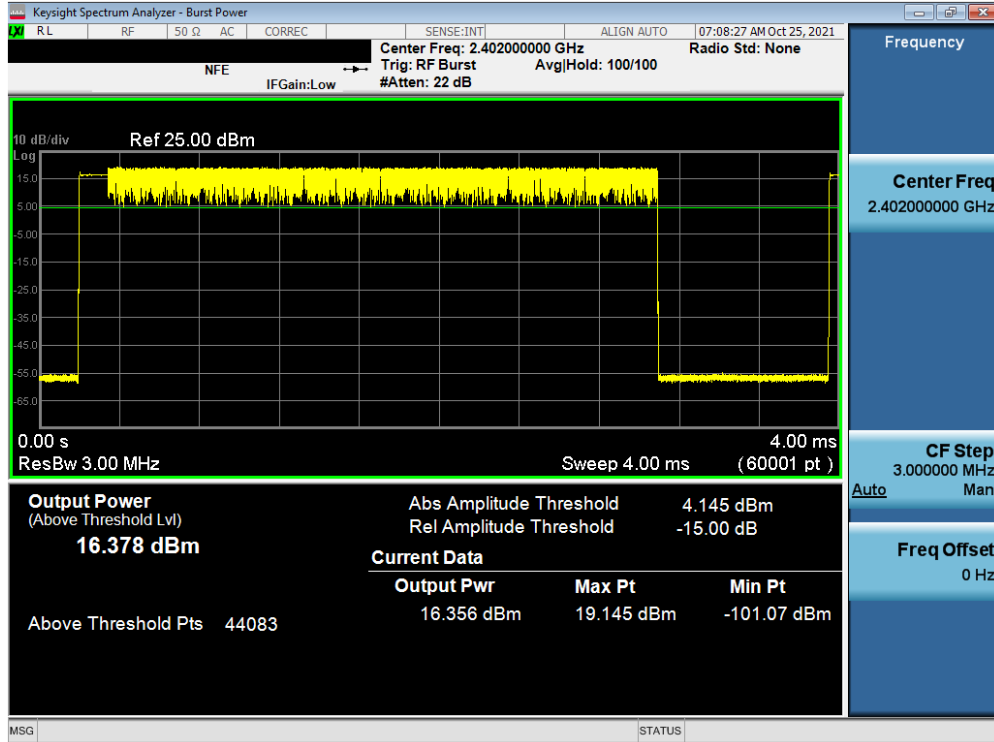


Plot 7-43. Average Conducted Power (2Mbps – Ch. 0) Antenna 1 ePA

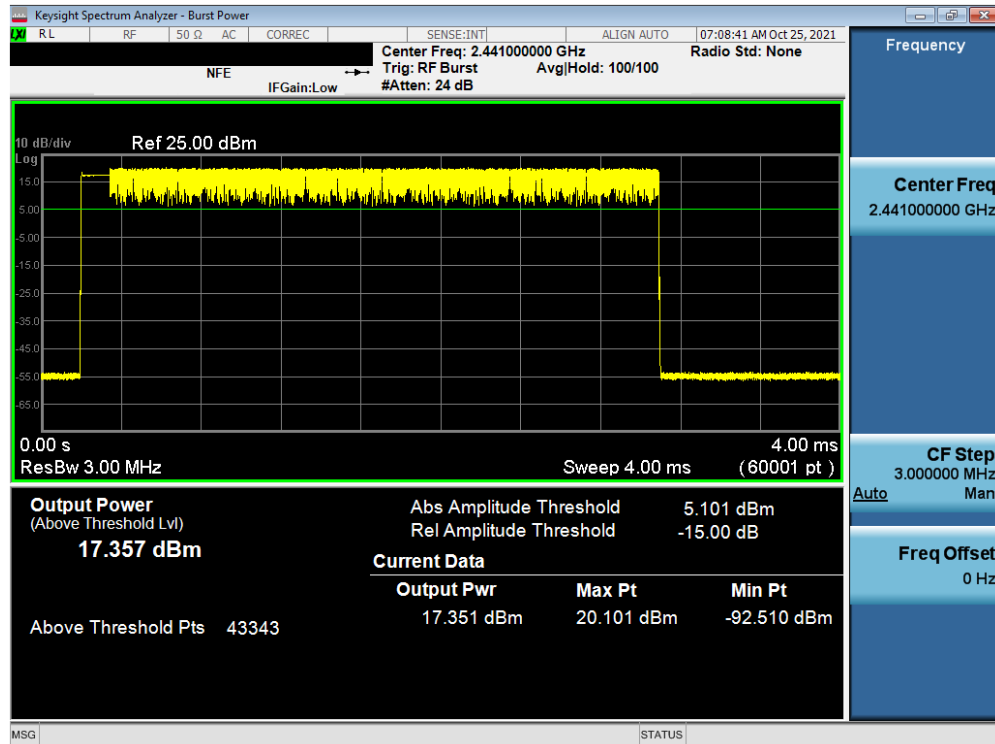


Plot 7-44. Average Conducted Power (2Mbps – Ch. 39) Antenna 1 ePA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 37 of 129

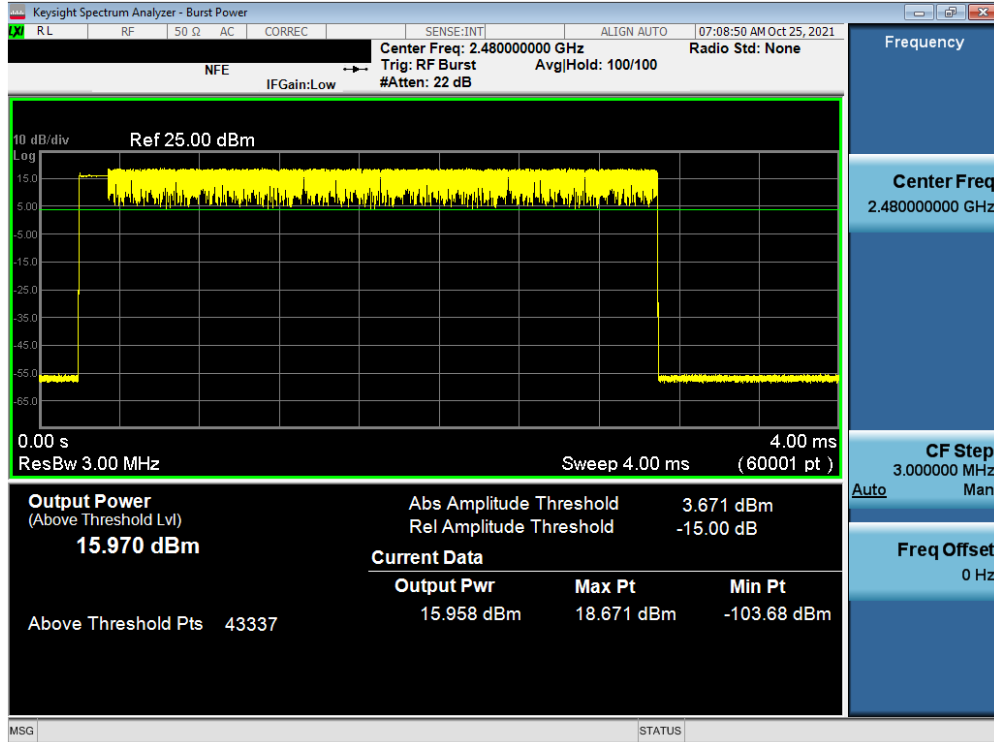


Plot 7-45. Average Conducted Power (2Mbps – Ch. 78) Antenna 1 ePA

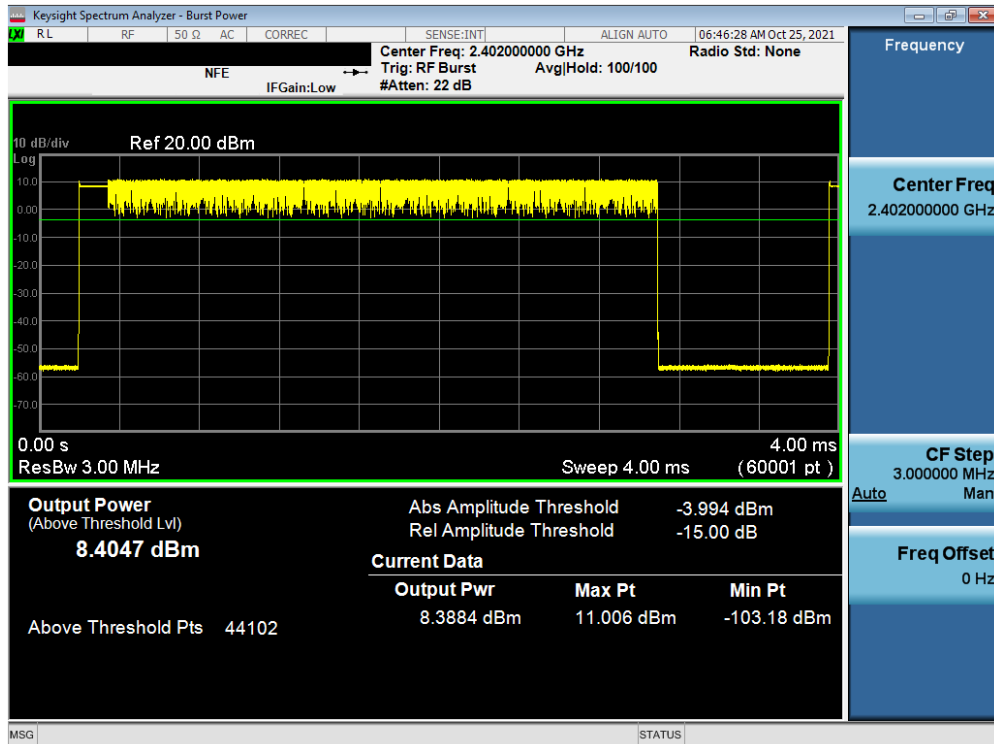


Plot 7-46. Average Conducted Power (2Mbps – Ch. 0) Antenna 1 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 38 of 129

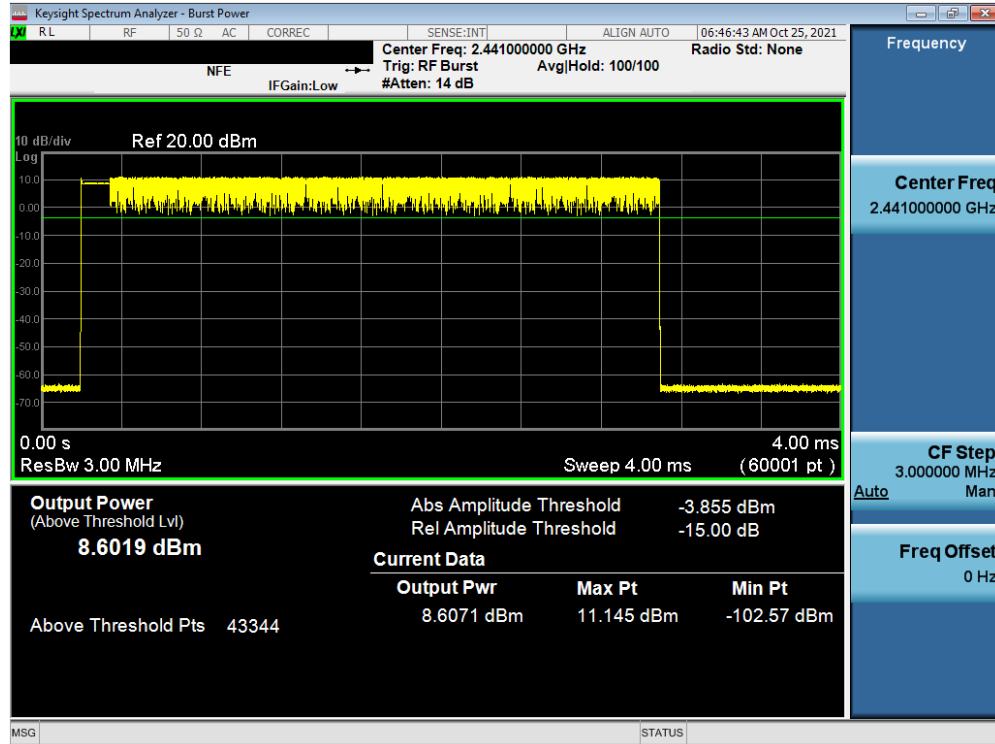


Plot 7-47. Average Conducted Power (2Mbps – Ch. 39) Antenna 1 iPA

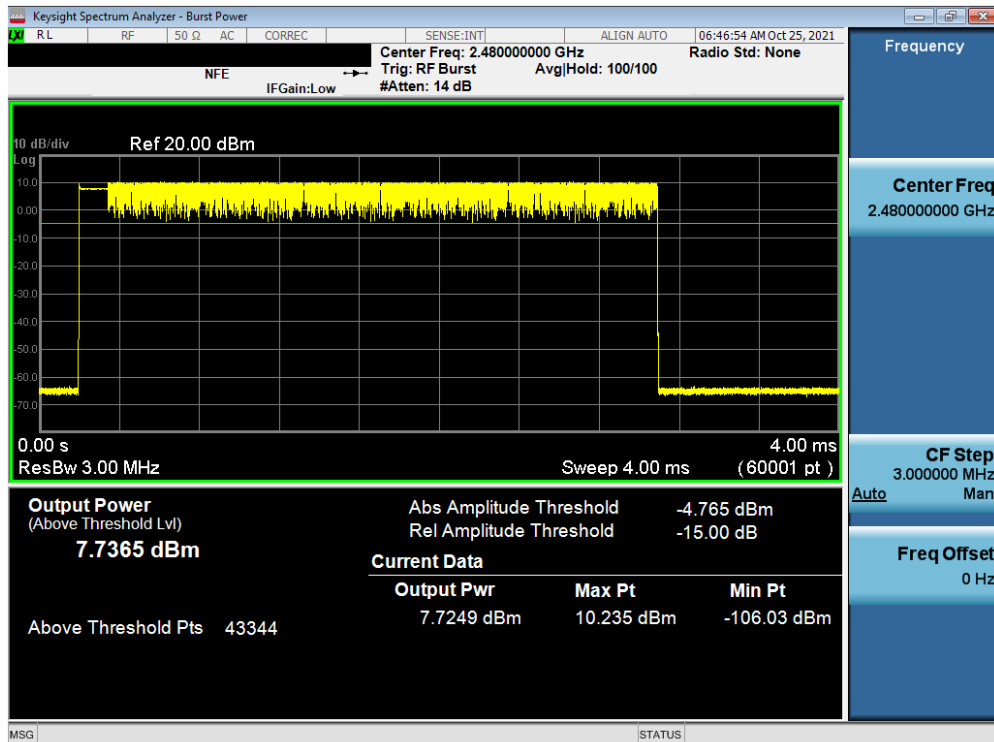


Plot 7-48. Average Conducted Power (2Mbps – Ch. 78) Antenna 1 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 39 of 129

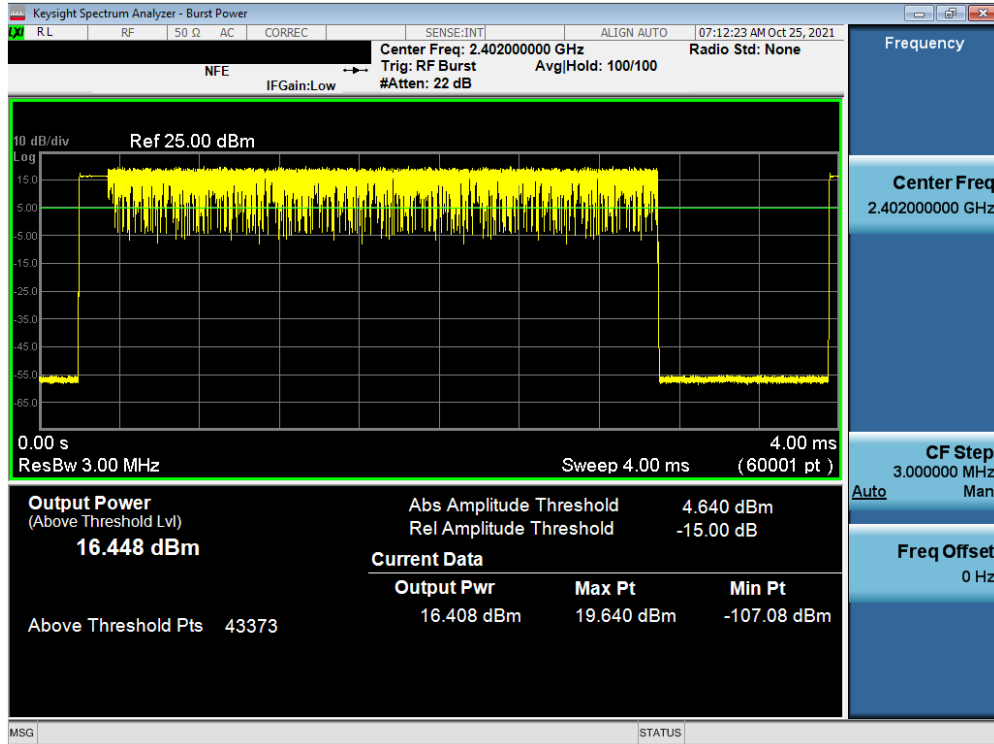


Plot 7-49. Average Conducted Power (3Mbps – Ch. 0) Antenna 1 ePA

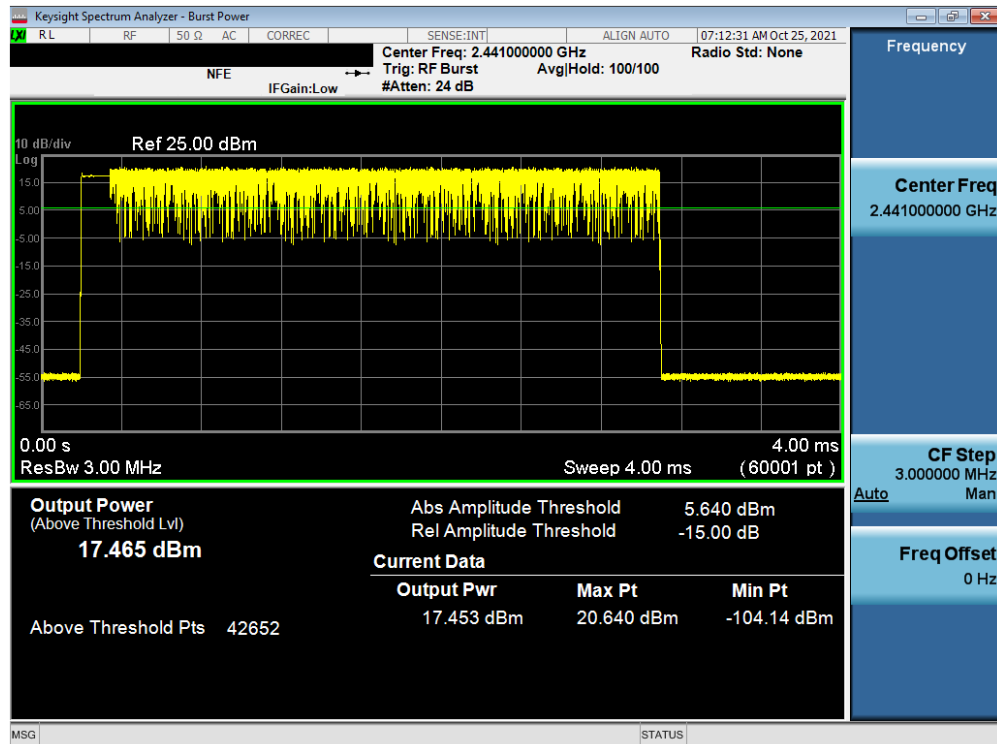


Plot 7-50. Average Conducted Power 32Mbps – Ch. 39) Antenna 1 ePA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 40 of 129

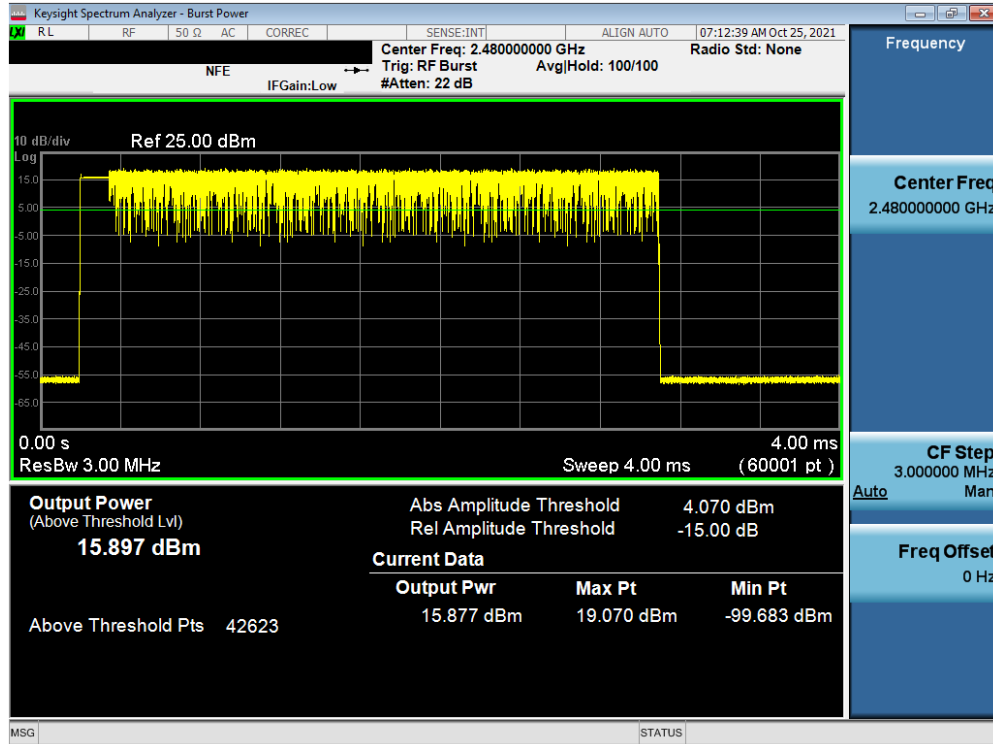


Plot 7-51. Average Conducted Power (3Mbps – Ch. 78) Antenna 1 ePA

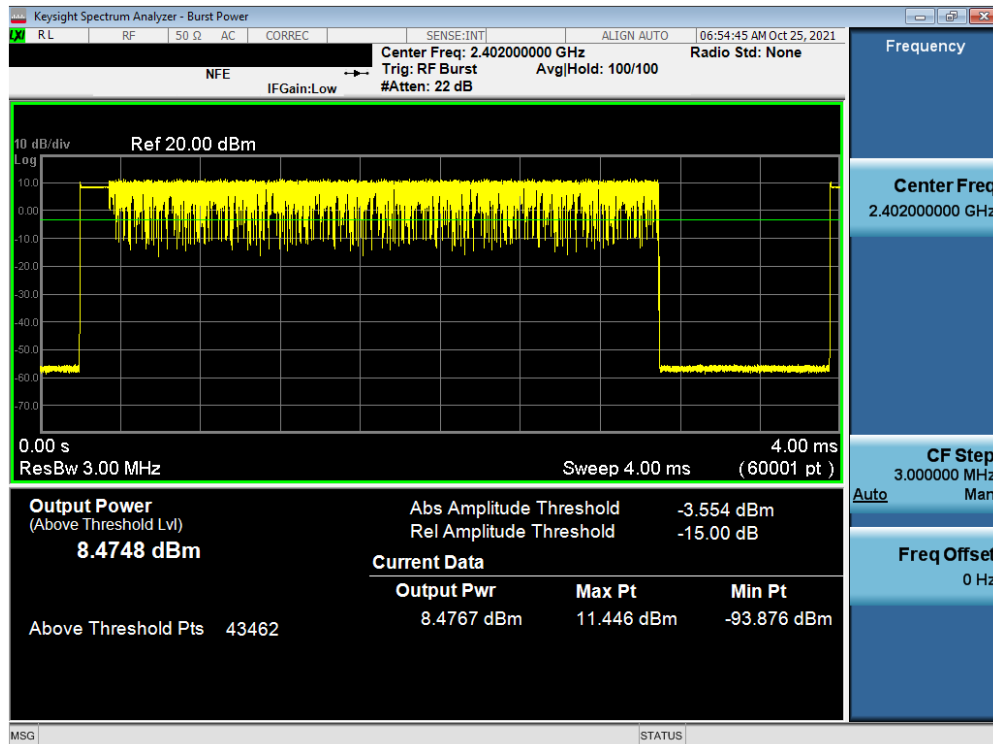


Plot 7-52. Average Conducted Power (3Mbps – Ch. 0) Antenna 1 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 41 of 129

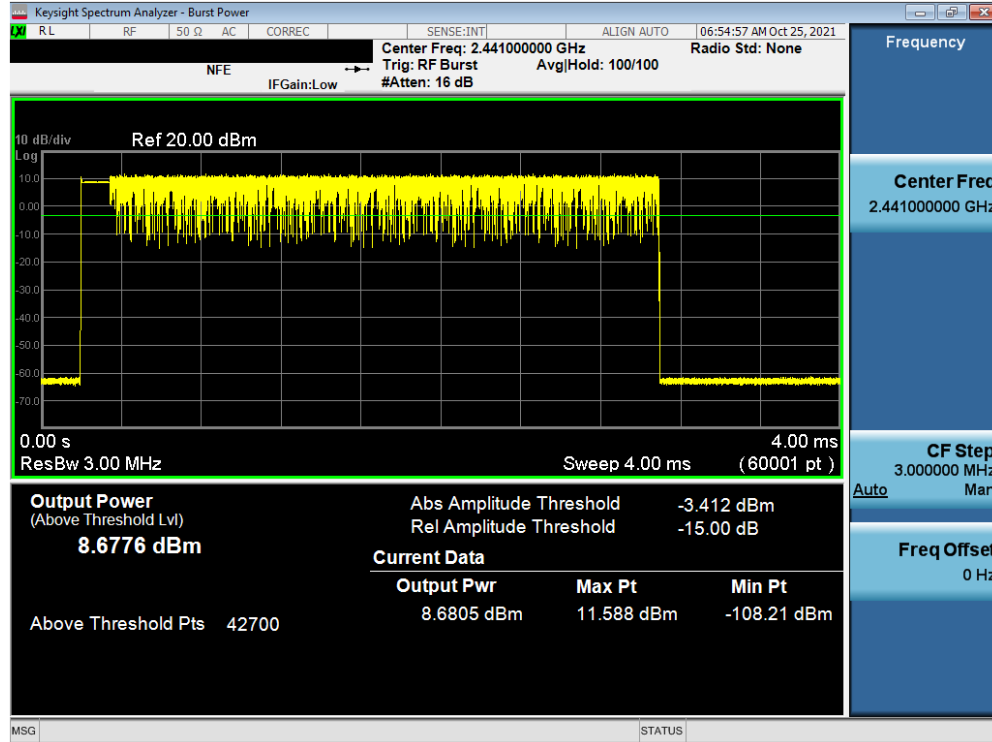

Plot 7-53. Average Conducted Power (3Mbps – Ch. 39) Antenna 1 iPA

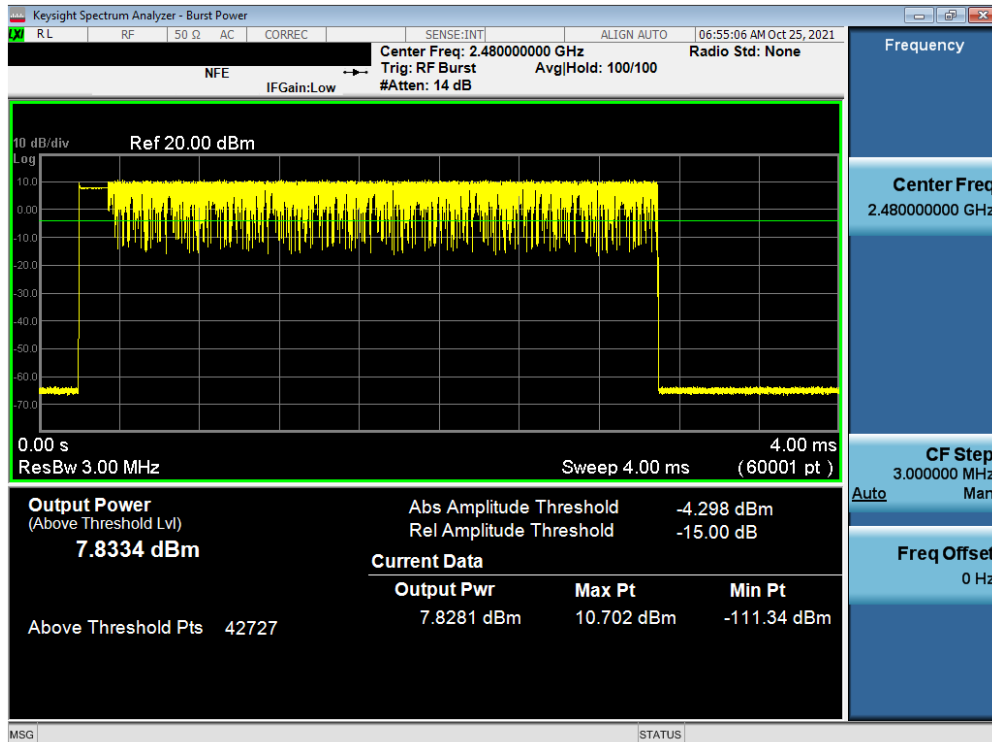

Plot 7-54. Average Conducted Power (3Mbps – Ch. 78) Antenna 1 iPA


FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 42 of 129

Antenna 2


Frequency [MHz]	Data Rate [Mbps]	Power Scheme	Channel No.	Peak Conducted Power		Avg Conducted Power	
				[dBm]	[mW]	[dBm]	[mW]
2402	1.0	ePA	0	16.96	49.648	15.57	36.043
2441	1.0	ePA	39	17.98	62.734	16.61	45.854
2480	1.0	ePA	78	16.99	50.026	15.50	35.483
2402	1.0	iPA	0	12.54	17.964	11.18	13.123
2441	1.0	iPA	39	12.94	19.674	11.69	14.767
2480	1.0	iPA	78	12.04	15.992	10.80	12.025
2402	2.0	ePA	0	17.68	58.627	15.02	31.778
2441	2.0	ePA	39	18.32	67.905	16.15	41.244
2480	2.0	ePA	78	17.59	57.425	15.38	34.486
2402	2.0	iPA	0	10.59	11.455	8.42	6.945
2441	2.0	iPA	39	11.24	13.305	8.79	7.573
2480	2.0	iPA	78	10.09	10.198	7.63	5.793
2402	3.0	ePA	0	18.18	65.766	14.89	30.849
2441	3.0	ePA	39	18.89	77.446	16.04	40.148
2480	3.0	ePA	78	18.06	63.929	15.45	35.093
2402	3.0	iPA	0	11.32	13.555	8.62	7.285
2441	3.0	iPA	39	11.60	14.448	8.94	7.840
2480	3.0	iPA	78	10.50	11.218	7.63	5.789

Table 7-5. Conducted Output Power Measurements Antenna 2

FCC ID: A3LSMS906E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 43 of 129

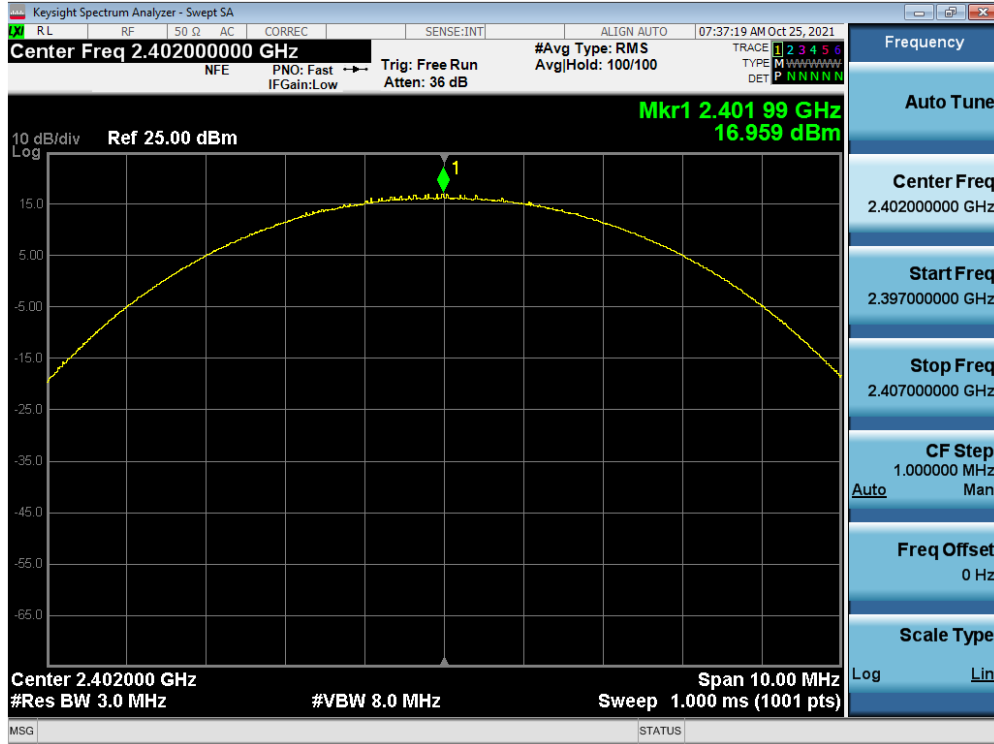


Plot 7-55. Peak Conducted Power (1Mbps – Ch. 0) Antenna 2 ePA

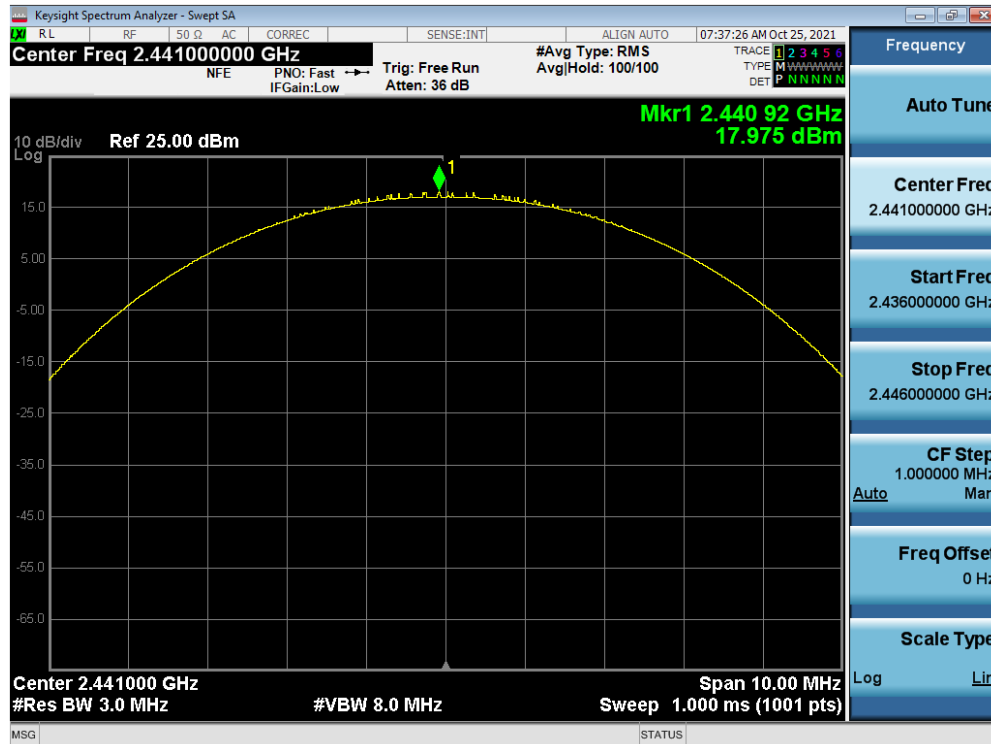


Plot 7-56. Peak Conducted Power (1Mbps – Ch. 39) Antenna 2 ePA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 44 of 129

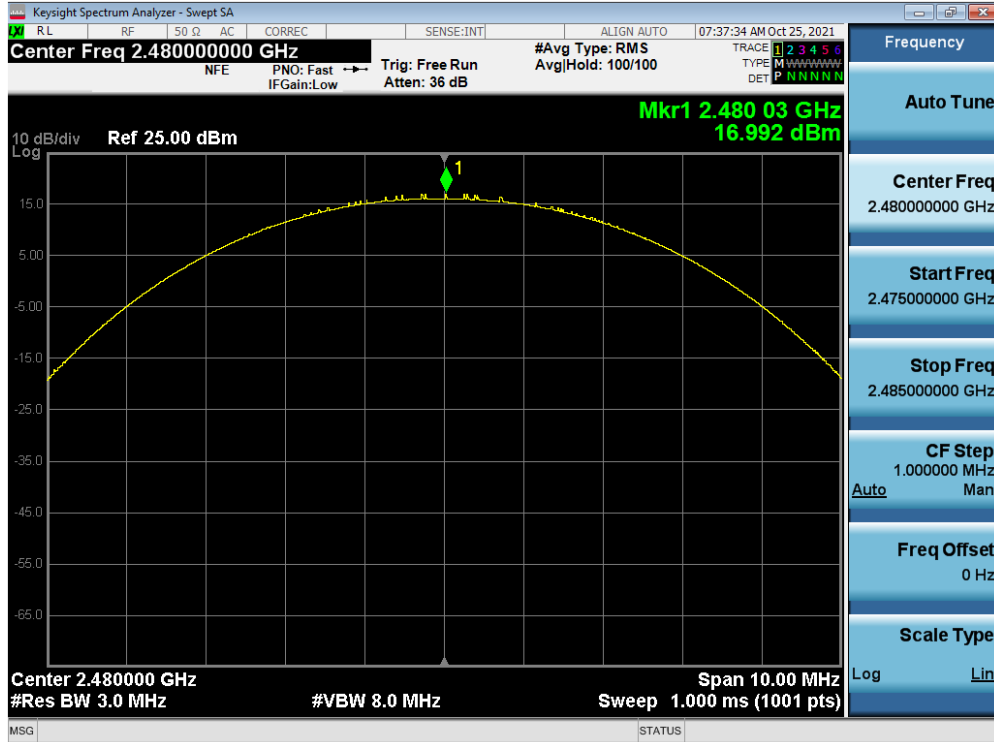


Plot 7-57. Peak Conducted Power (1Mbps – Ch. 78) Antenna 2 ePA

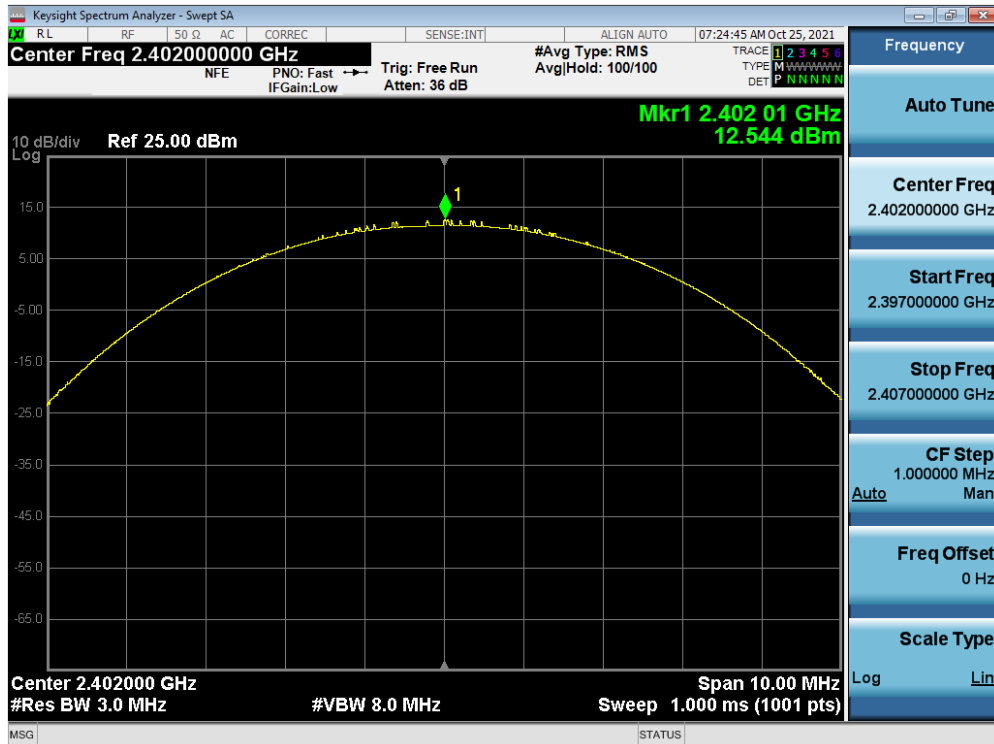


Plot 7-58. Peak Conducted Power (1Mbps – Ch. 0) Antenna 2 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 45 of 129

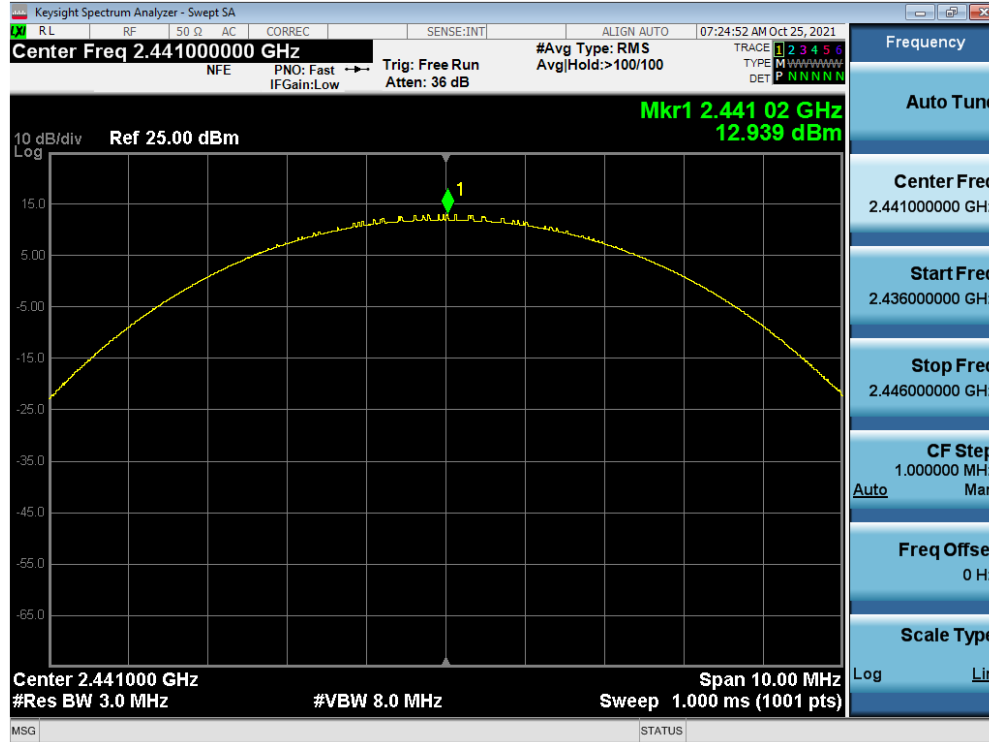


Plot 7-59. Peak Conducted Power (1Mbps – Ch. 39) Antenna 2 iPA

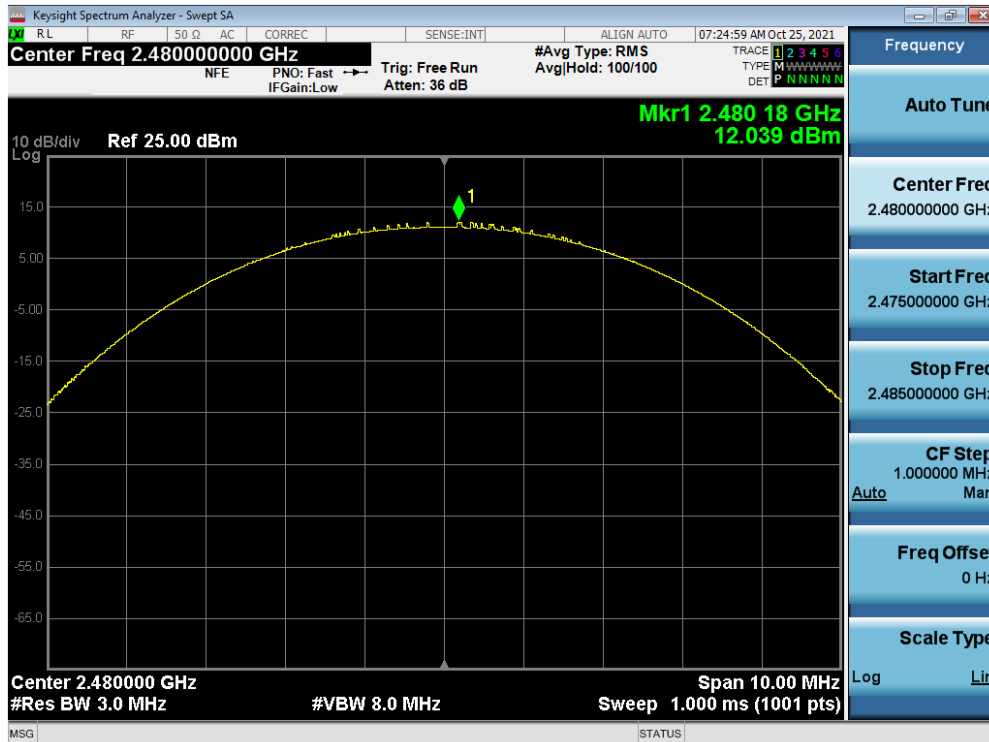


Plot 7-60. Peak Conducted Power (1Mbps – Ch. 78) Antenna 2 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 46 of 129

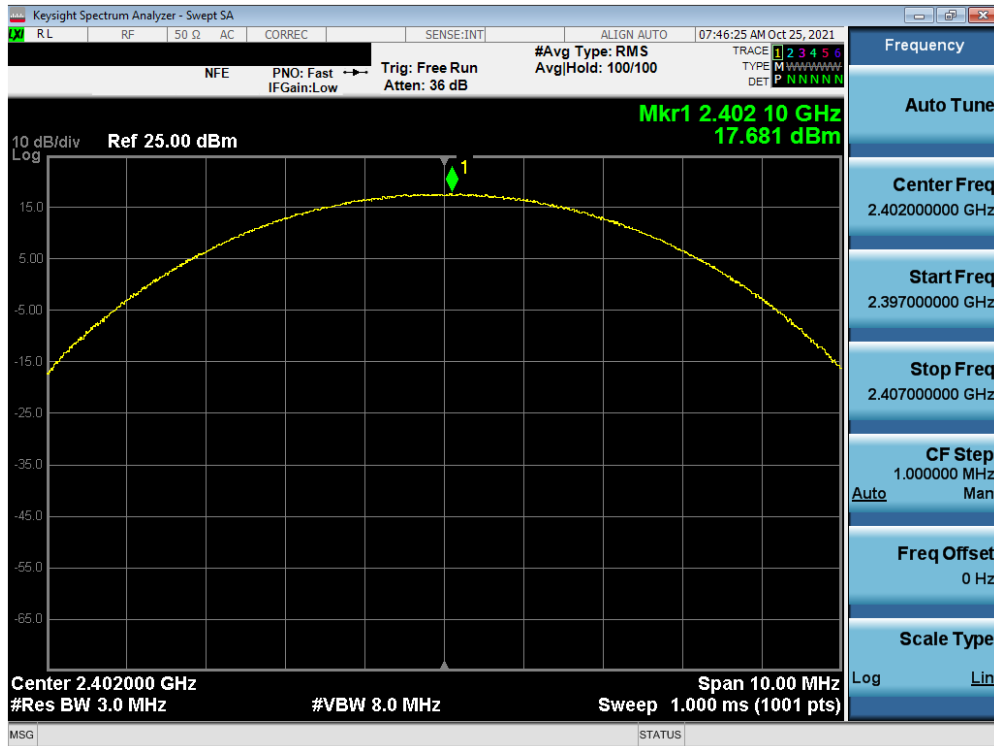


Plot 7-61. Peak Conducted Power (2Mbps – Ch. 0) Antenna 2 ePA

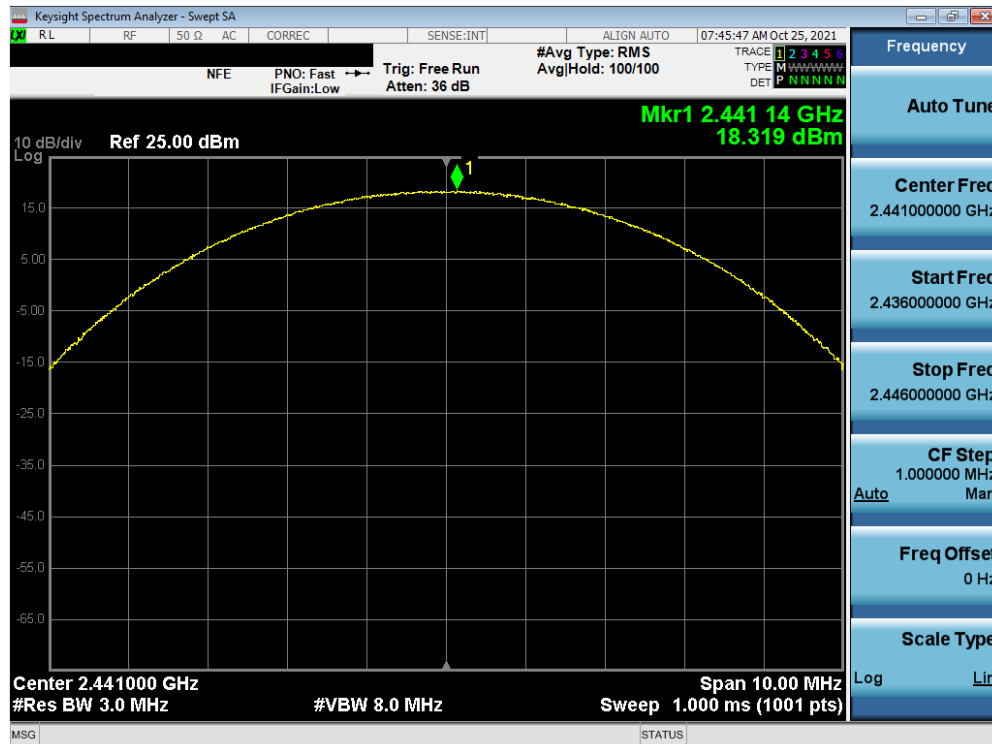


Plot 7-62. Peak Conducted Power (2Mbps – Ch. 39) Antenna 2 ePA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 47 of 129

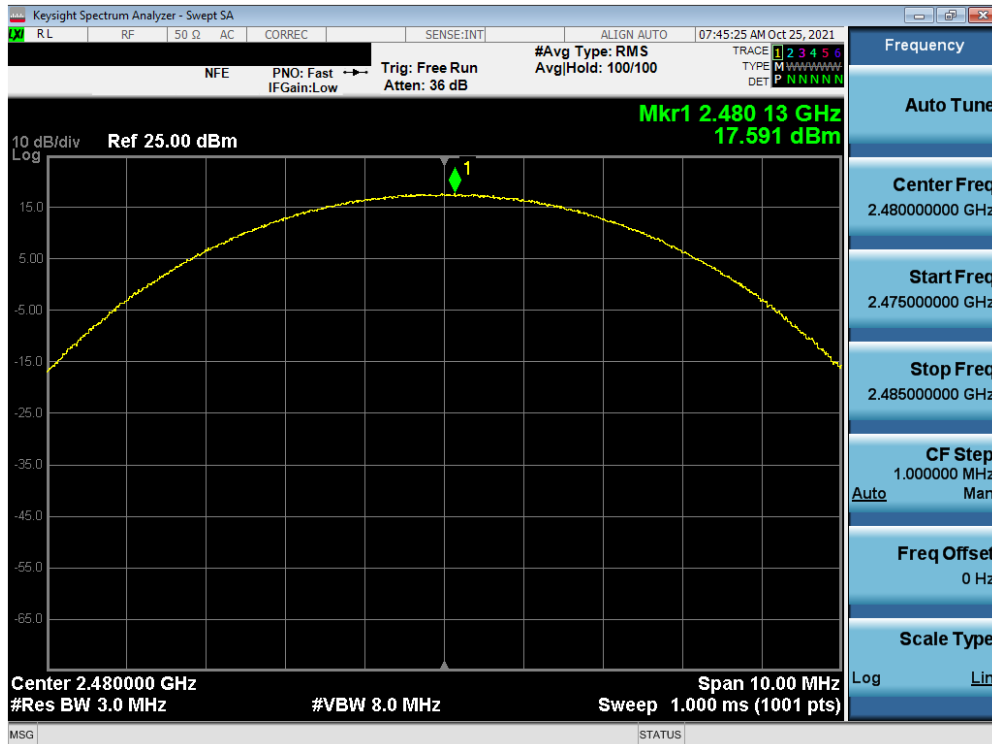


Plot 7-63. Peak Conducted Power (2Mbps – Ch. 78) Antenna 2 ePA

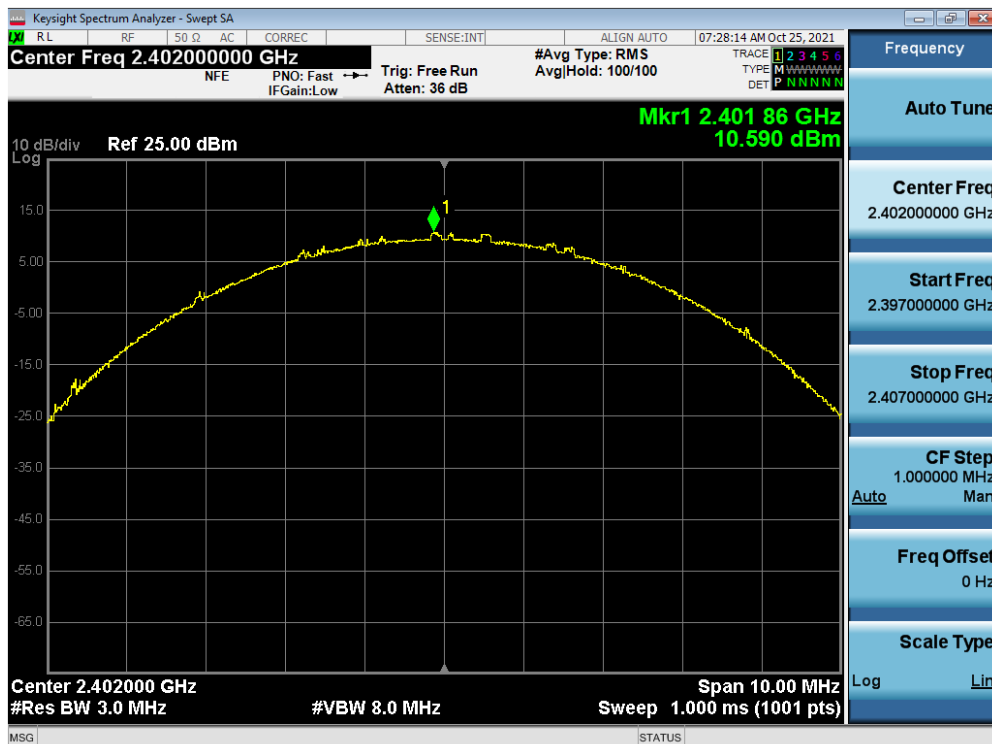


Plot 7-64. Peak Conducted Power (2Mbps – Ch. 0) Antenna 2 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 48 of 129

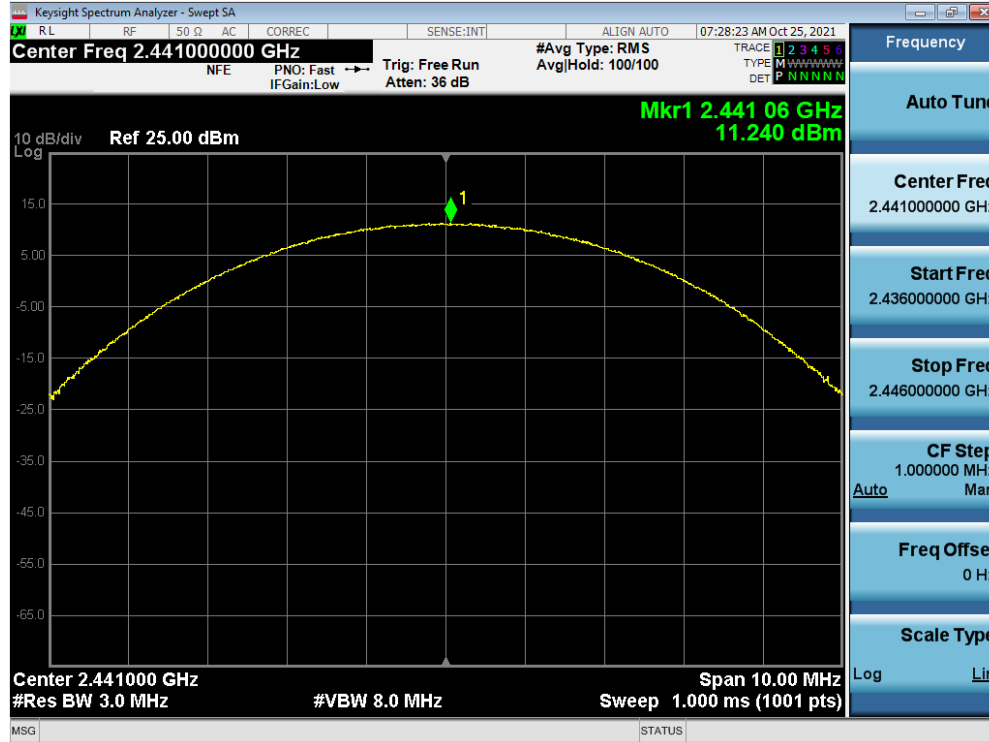


Plot 7-65. Peak Conducted Power (2Mbps – Ch. 39) Antenna 2 iPA

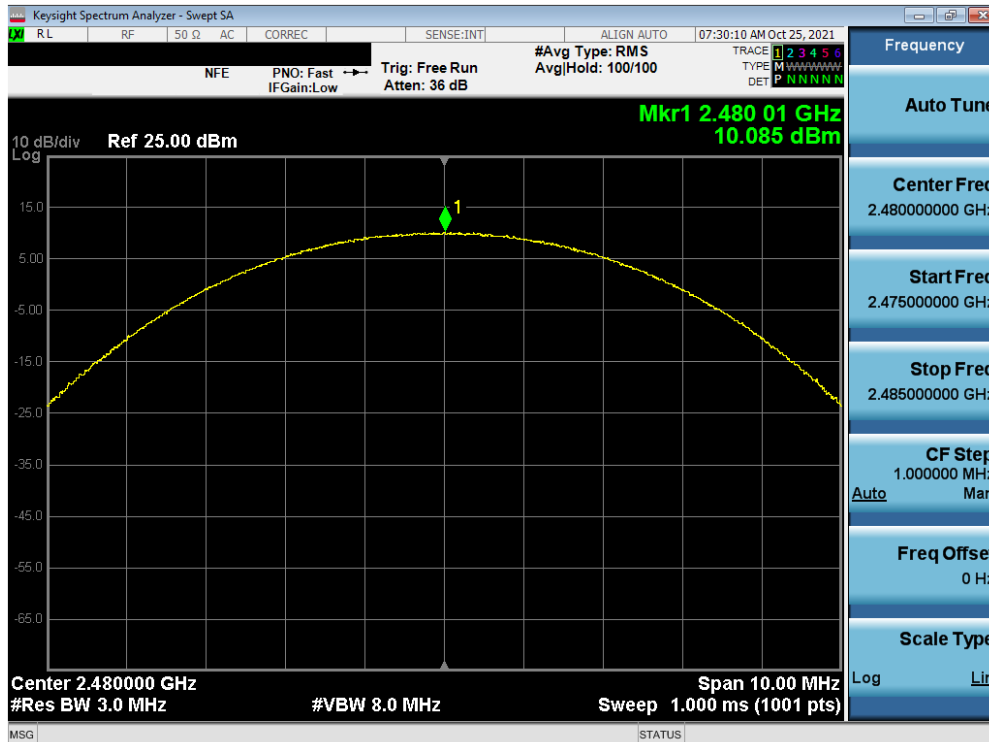


Plot 7-66. Peak Conducted Power (2Mbps – Ch. 78) Antenna 2 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 49 of 129

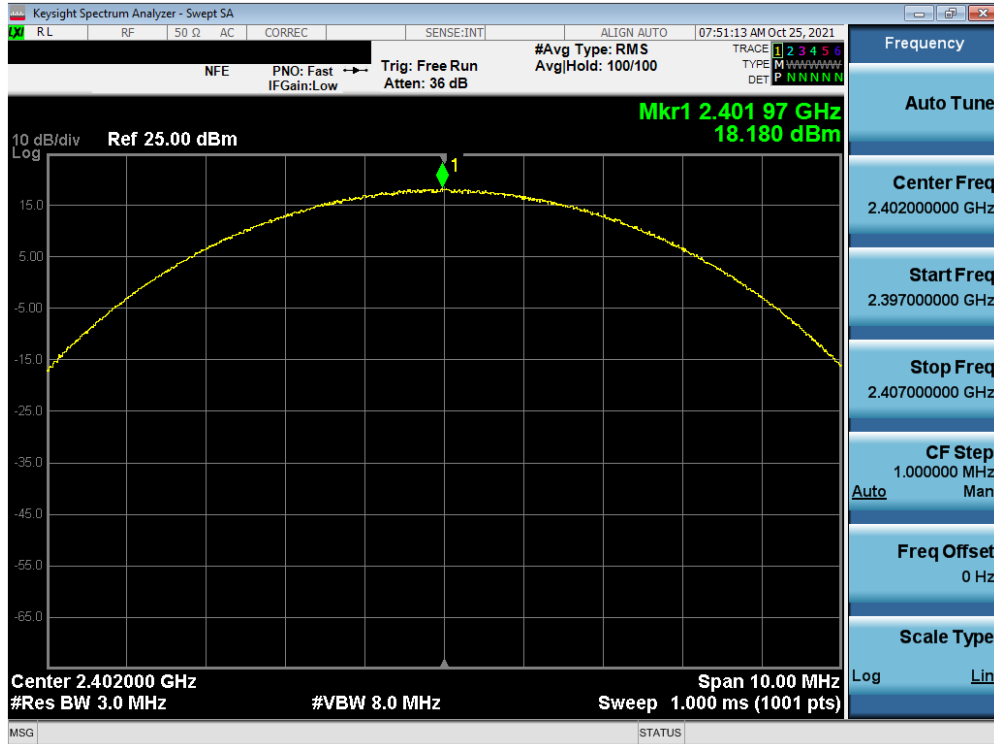


Plot 7-67. Peak Conducted Power (3Mbps – Ch. 0) Antenna 2 ePA

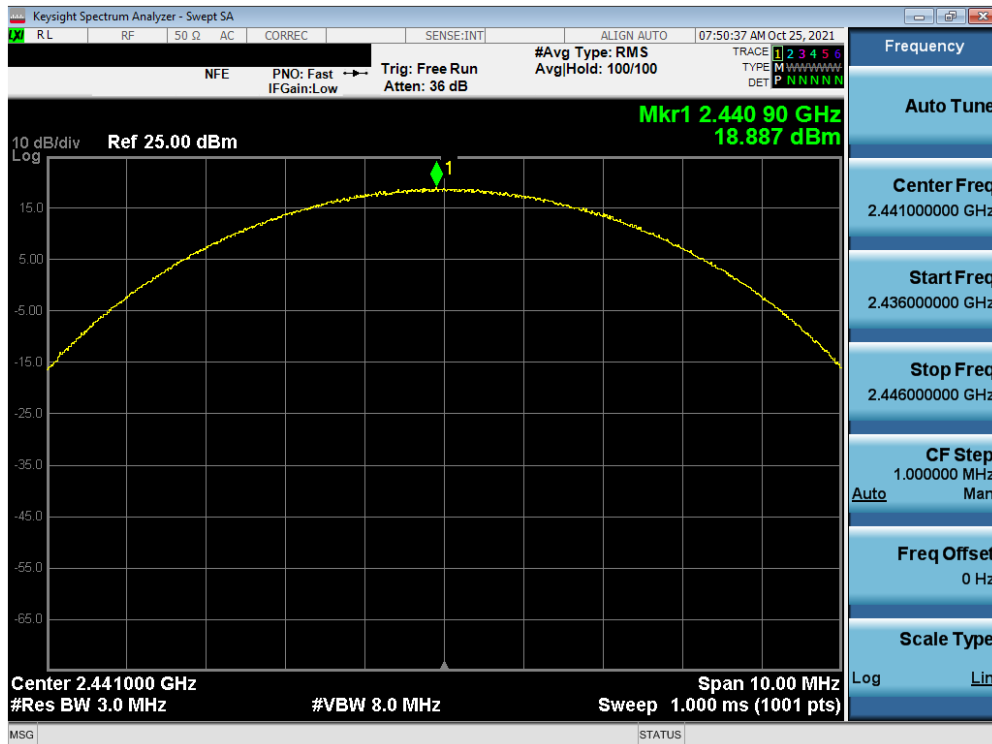


Plot 7-68. Peak Conducted Power 3Mbps – Ch. 39) Antenna 2 ePA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 50 of 129

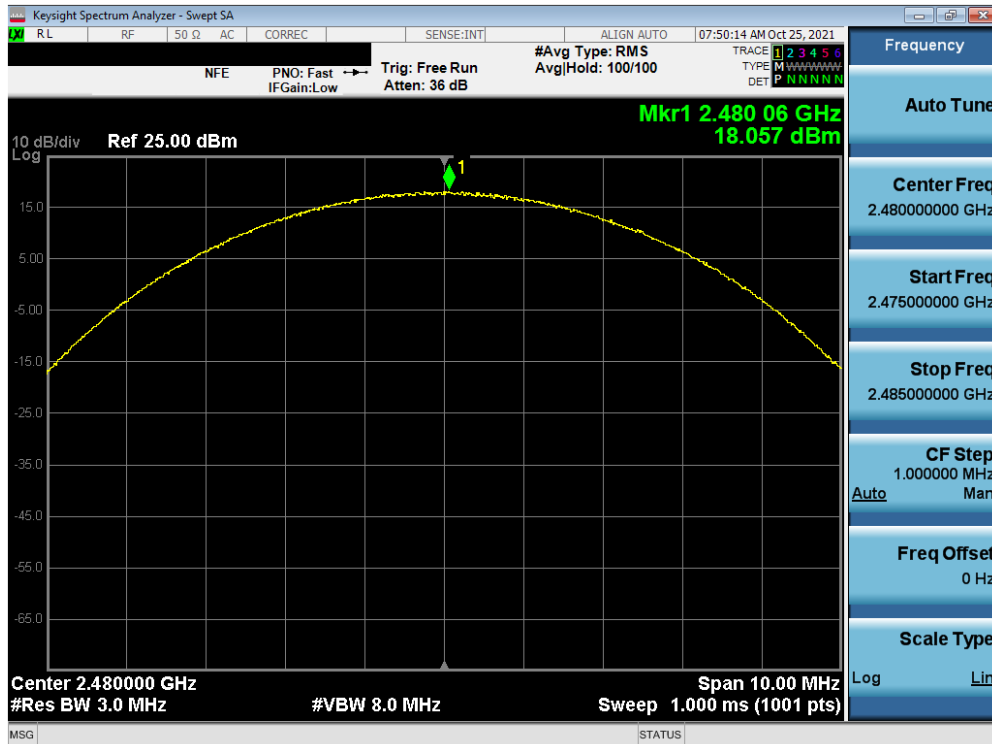


Plot 7-69. Peak Conducted Power (3Mbps – Ch. 78) Antenna 2 ePA

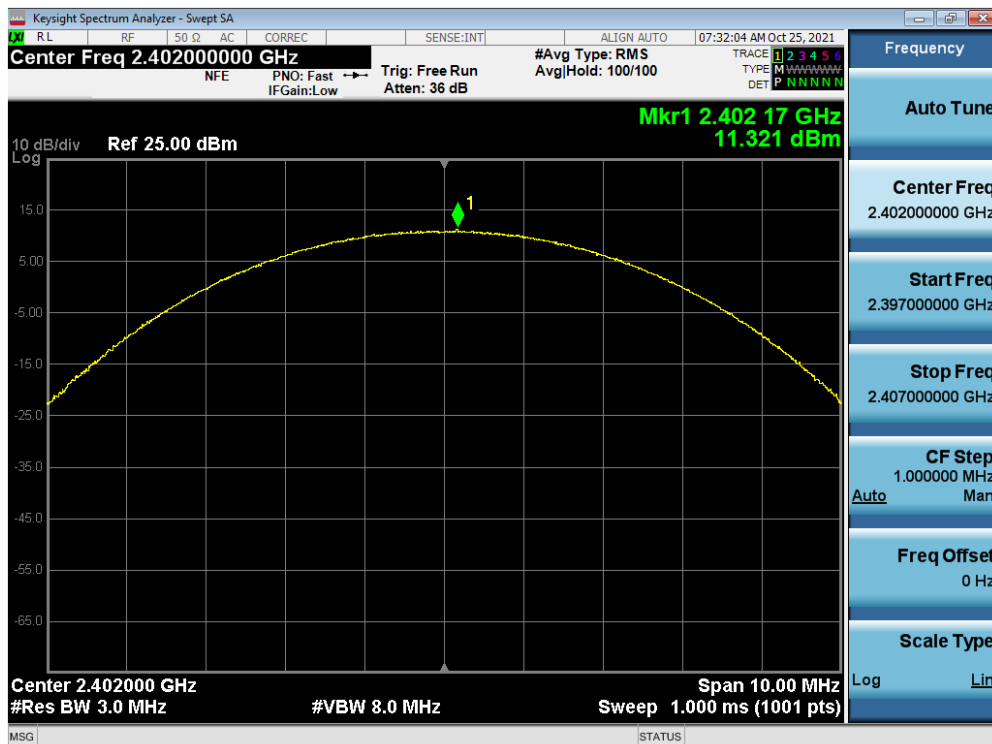


Plot 7-70. Peak Conducted Power (3Mbps – Ch. 0) Antenna 2 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 51 of 129

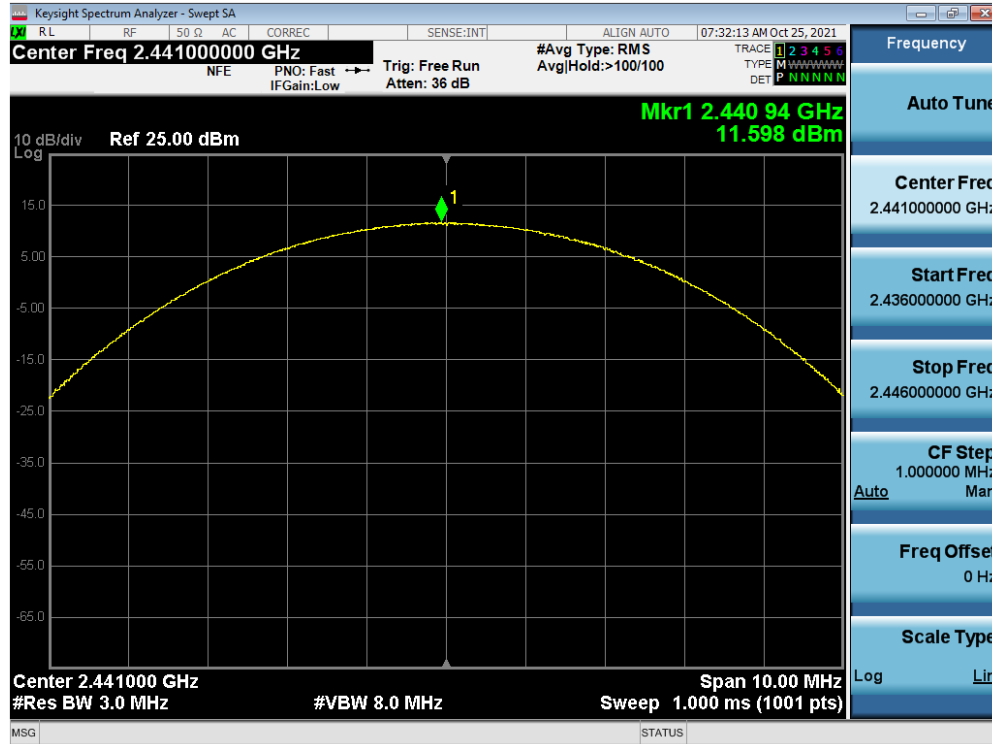


Plot 7-71. Peak Conducted Power (3Mbps – Ch. 39) Antenna 2 iPA

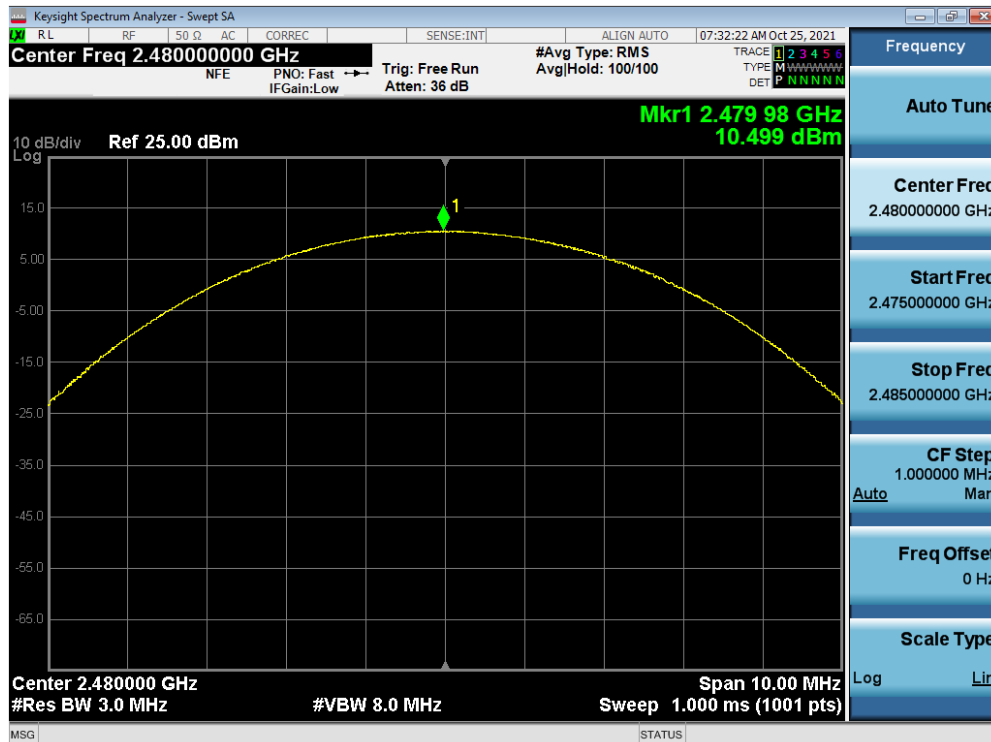


Plot 7-72. Peak Conducted Power (3Mbps – Ch. 78) Antenna 2 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 52 of 129

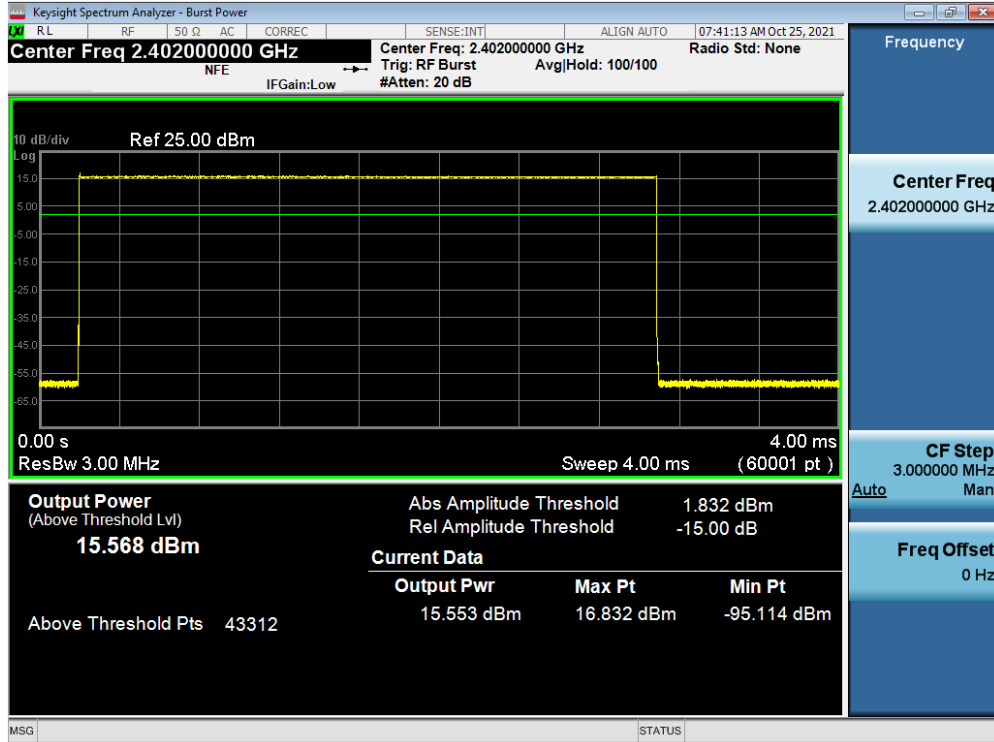


Plot 7-73. Average Conducted Power (1Mbps - Ch. 0) Antenna 2 ePA

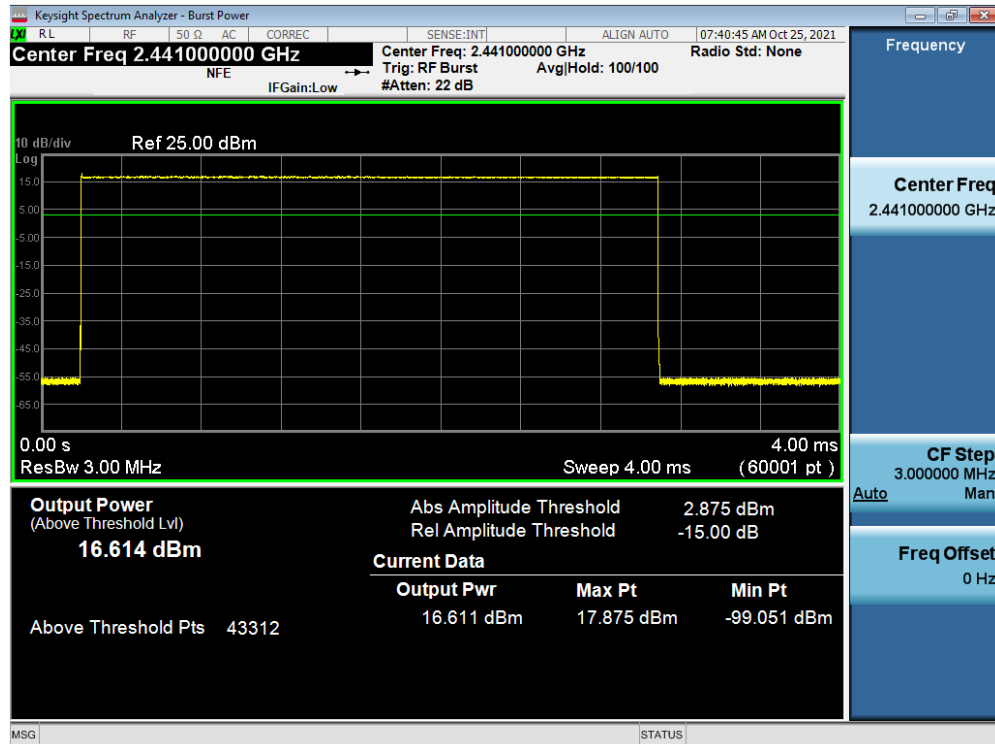


Plot 7-74. Average Conducted Power (1Mbps - Ch. 39) Antenna 2 ePA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 - 12/03/2021	EUT Type: Portable Handset		Page 53 of 129

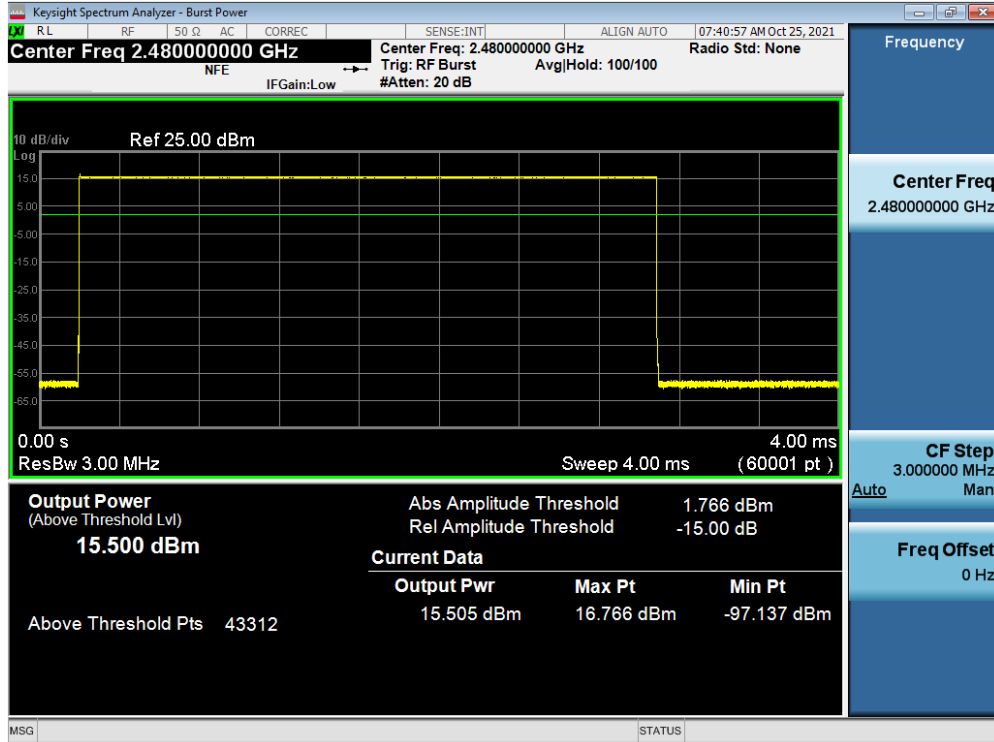


Plot 7-75. Average Conducted Power (1Mbps – Ch. 78) Antenna 2 ePA

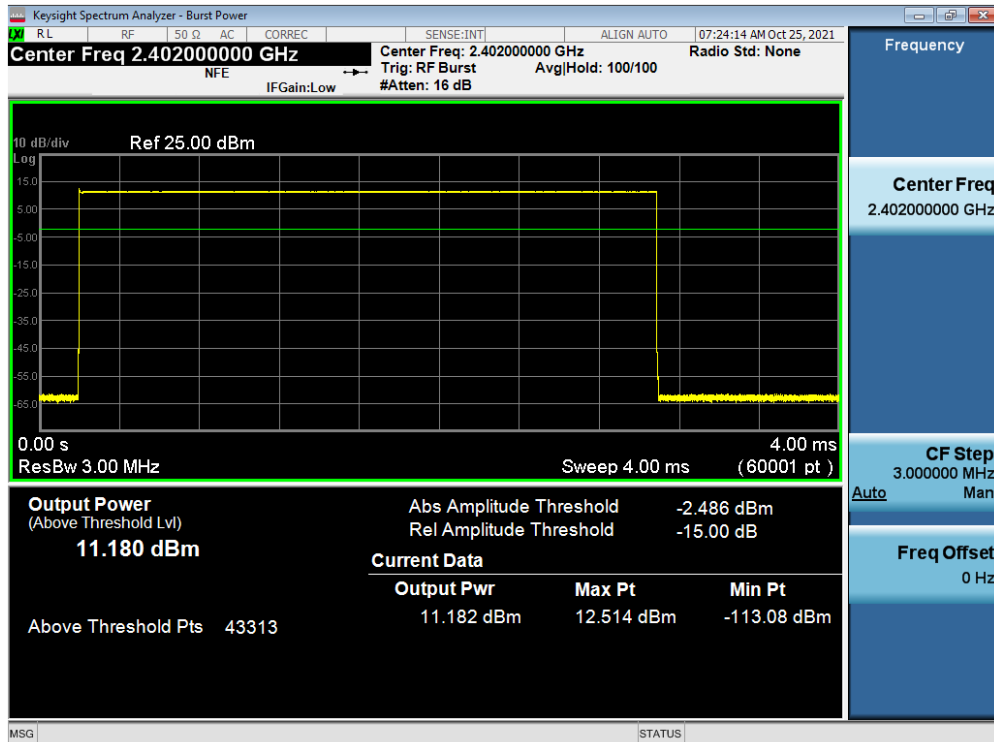


Plot 7-76. Average Conducted Power (1Mbps – Ch. 0) Antenna 2 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 54 of 129

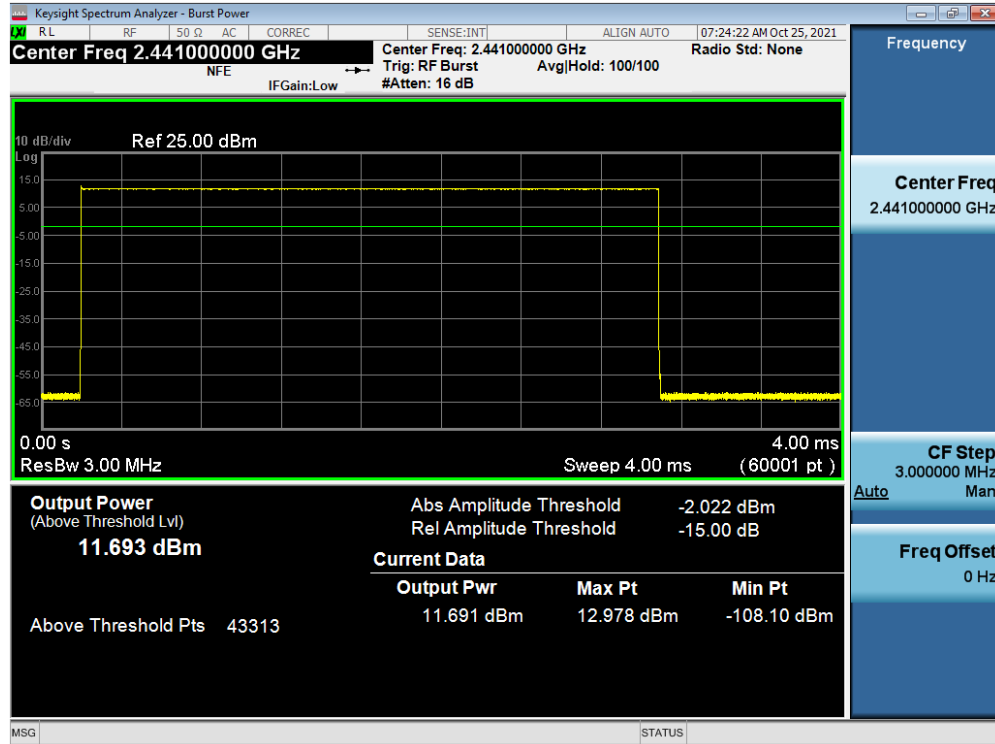


Plot 7-77. Average Conducted Power (1Mbps – Ch. 39) Antenna 2 iPA

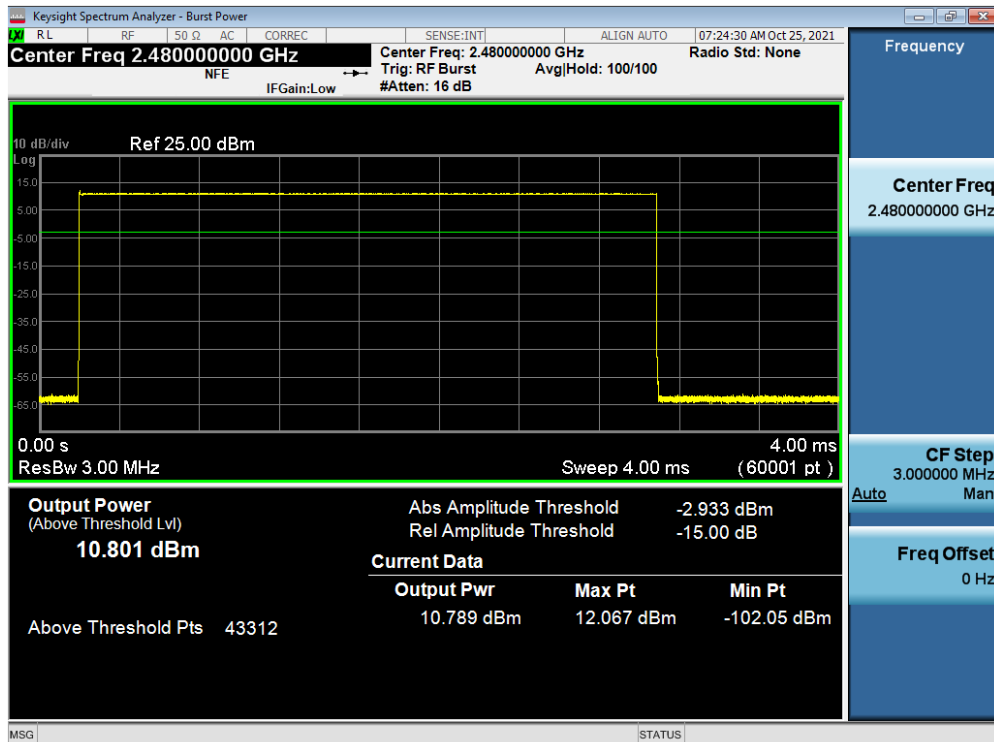


Plot 7-78. Average Conducted Power (1Mbps – Ch. 78) Antenna 2 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 55 of 129

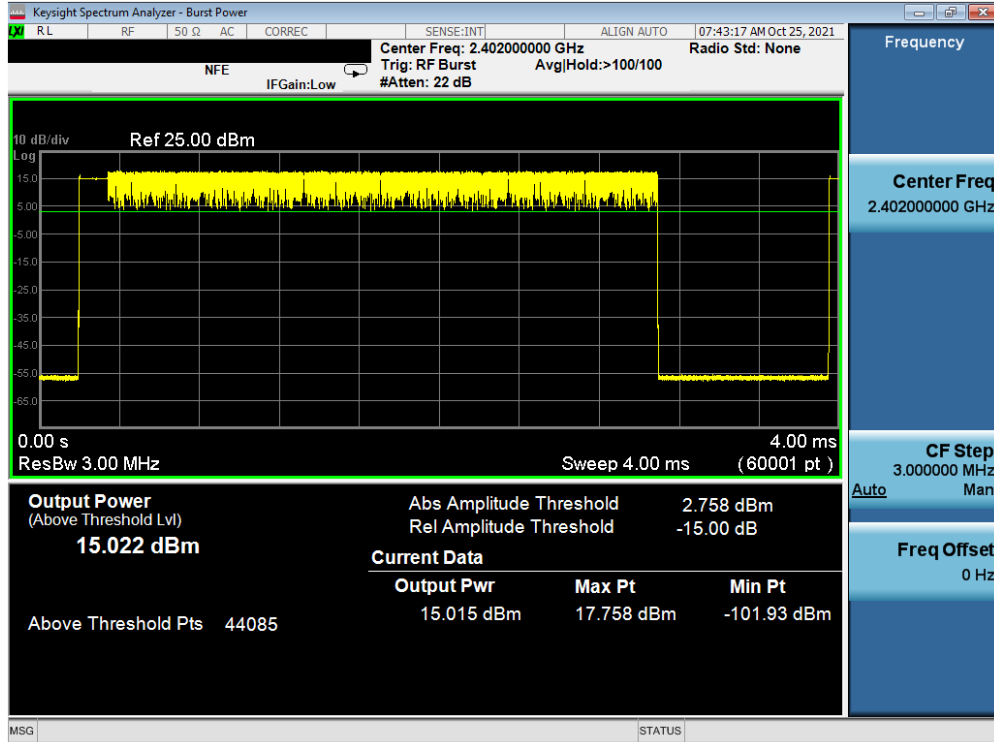


Plot 7-79. Average Conducted Power (2Mbps – Ch. 0) Antenna 2 ePA

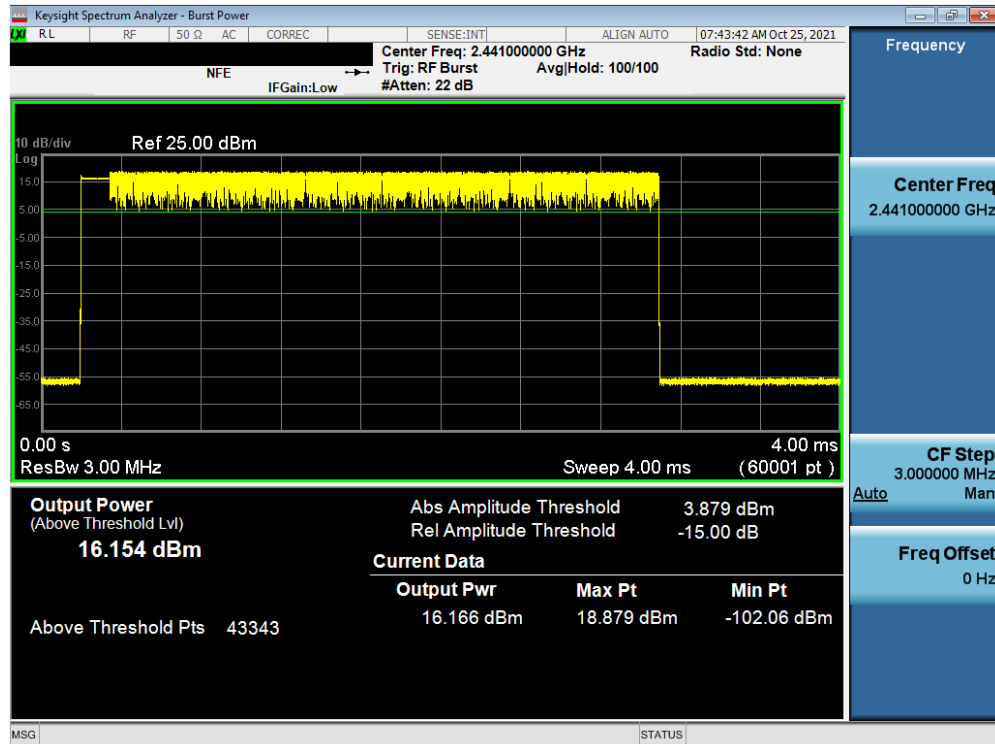


Plot 7-80. Average Conducted Power (2Mbps – Ch. 39) Antenna 2 ePA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 56 of 129

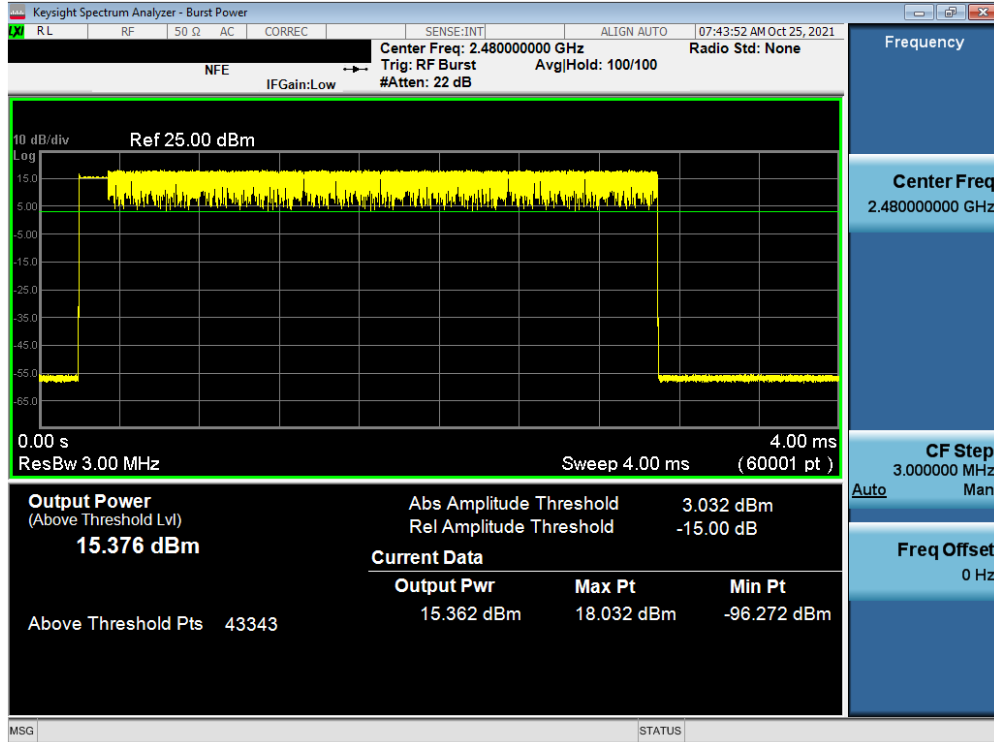


Plot 7-81. Average Conducted Power (2Mbps – Ch. 78) Antenna 2 ePA

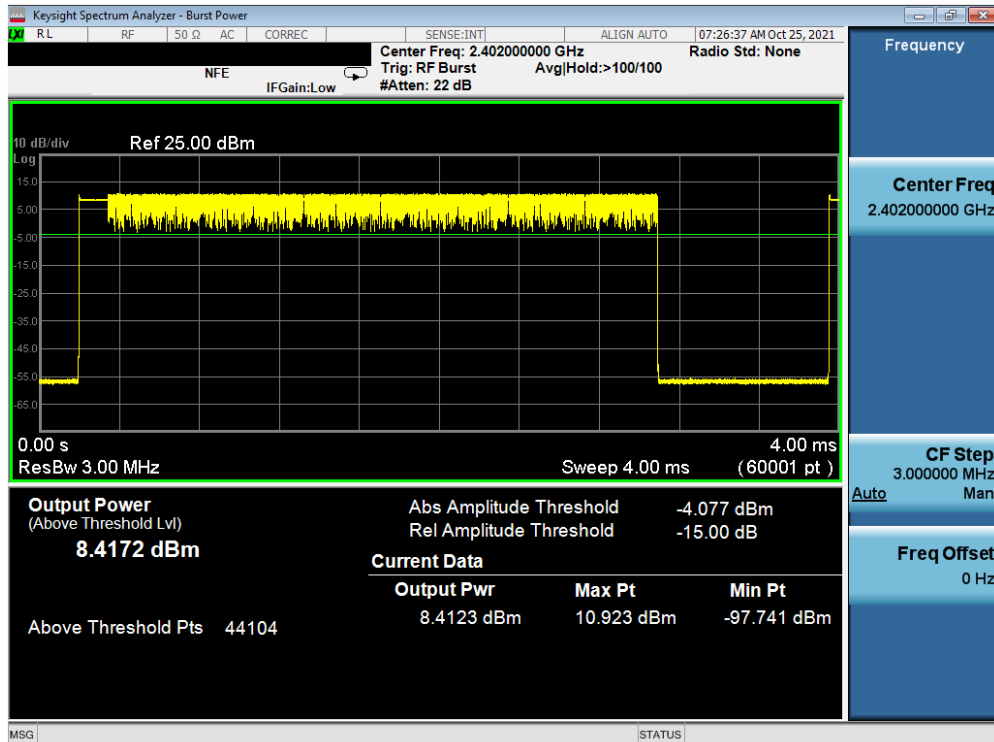


Plot 7-82. Average Conducted Power (2Mbps – Ch. 0) Antenna 2 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 57 of 129

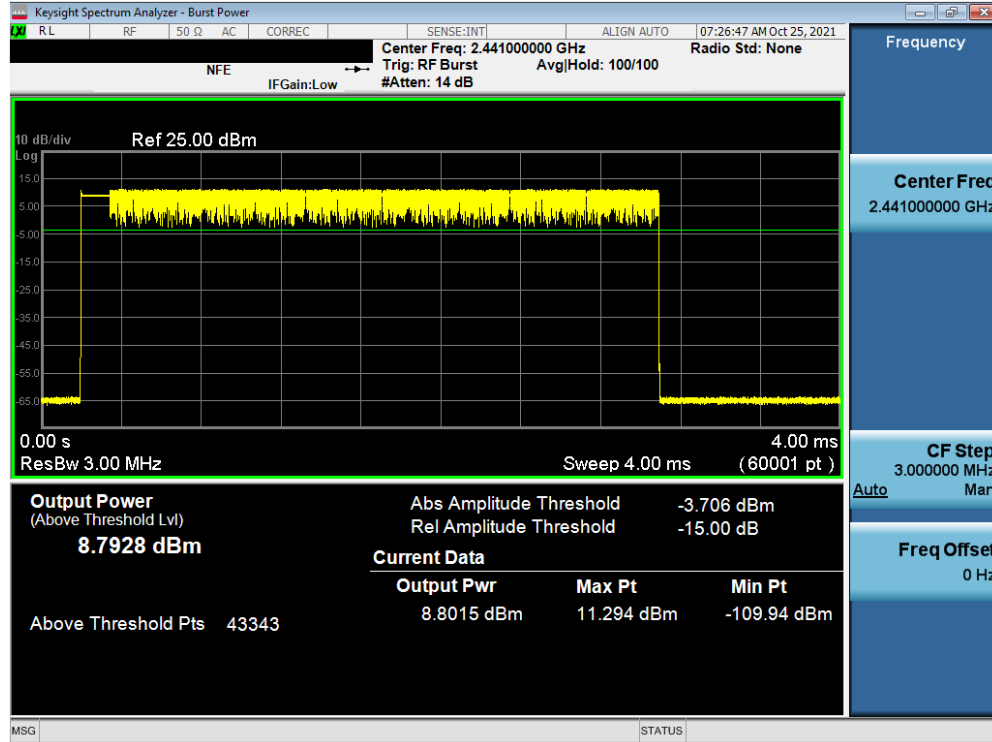


Plot 7-83. Average Conducted Power (2Mbps – Ch. 39) Antenna 2 iPA

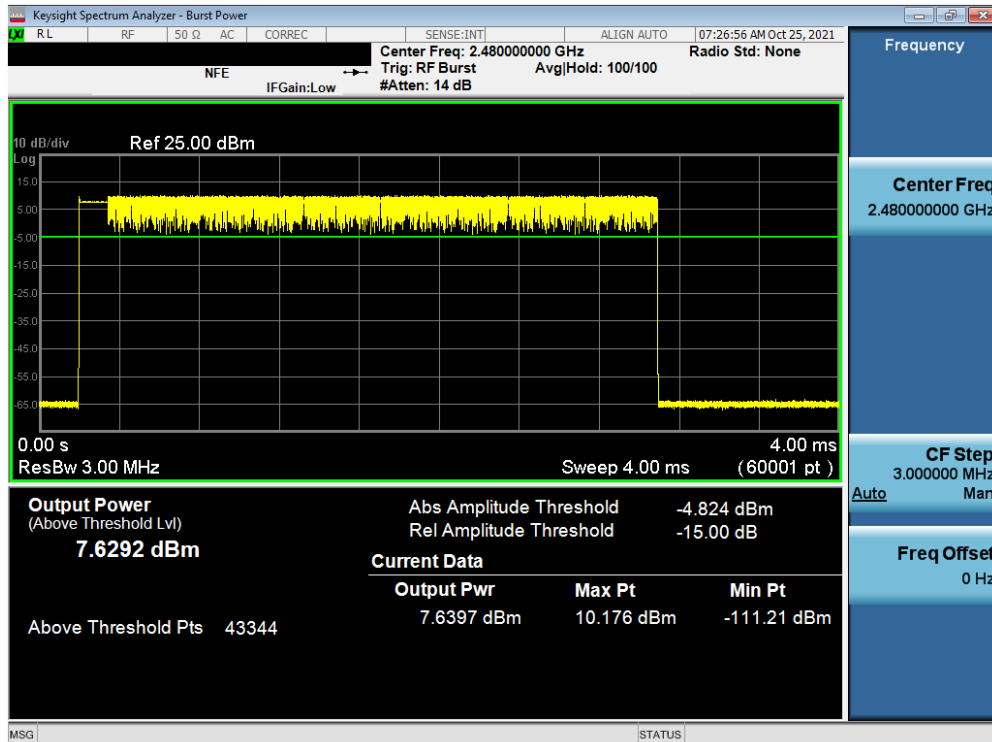


Plot 7-84. Average Conducted Power (2Mbps – Ch. 78) Antenna 2 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 58 of 129

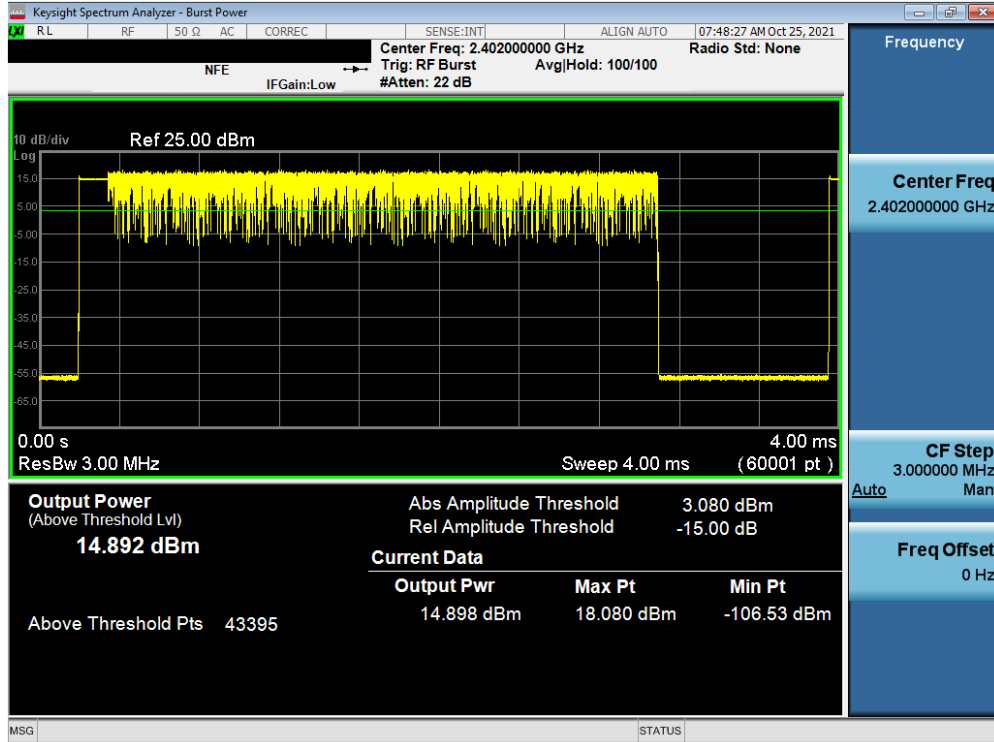


Plot 7-85. Average Conducted Power (3Mbps – Ch. 0) Antenna 2 ePA

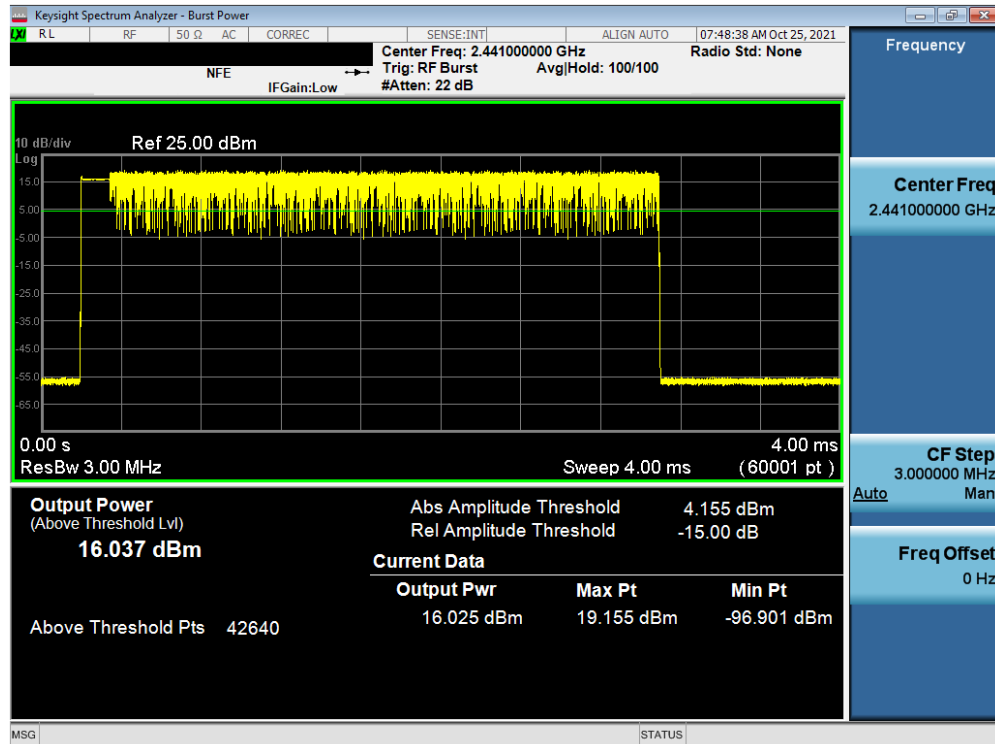


Plot 7-86. Average Conducted Power (3Mbps – Ch. 39) Antenna 2 ePA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 59 of 129

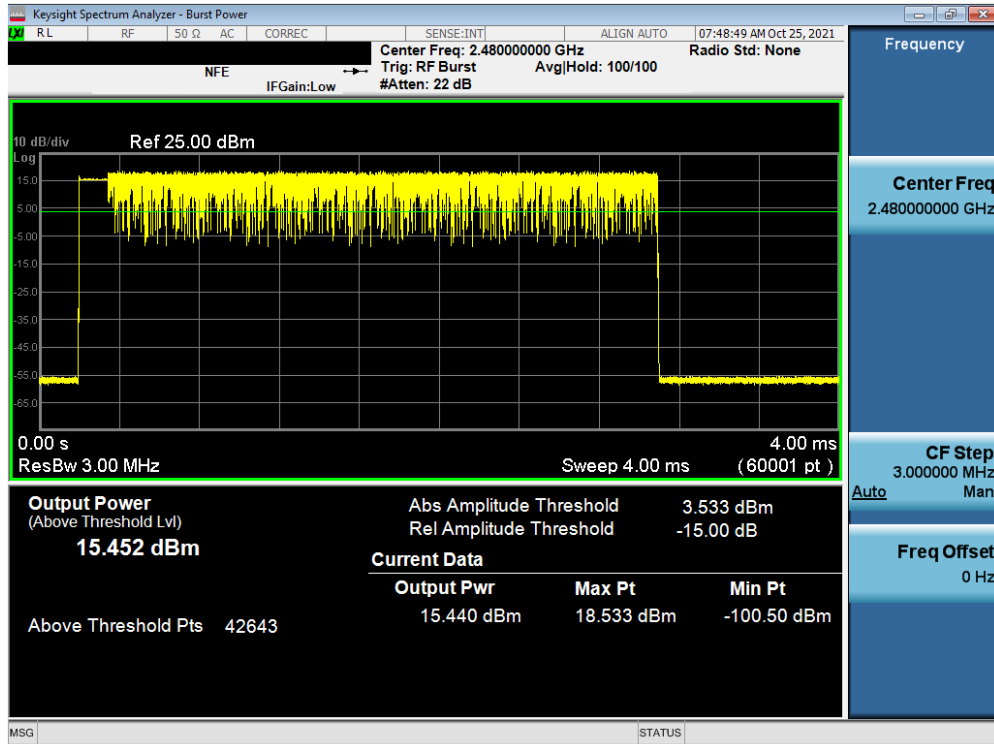


Plot 7-87. Average Conducted Power (3Mbps – Ch. 78) Antenna 2 ePA

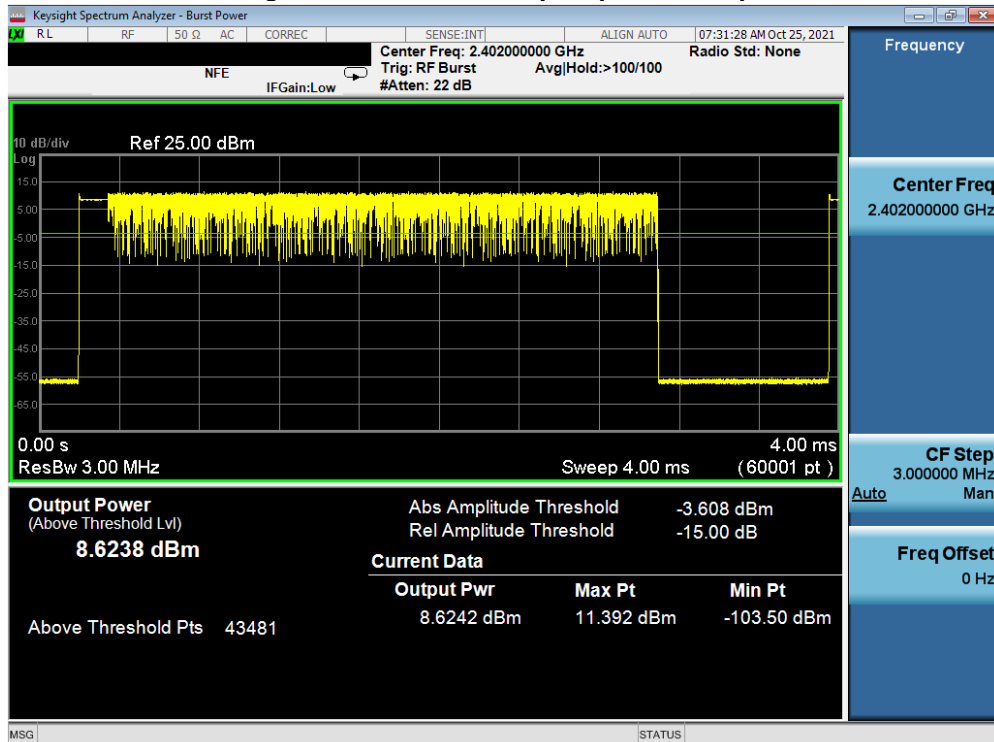


Plot 7-88. Average Conducted Power (3Mbps – Ch. 0) Antenna 2 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 60 of 129

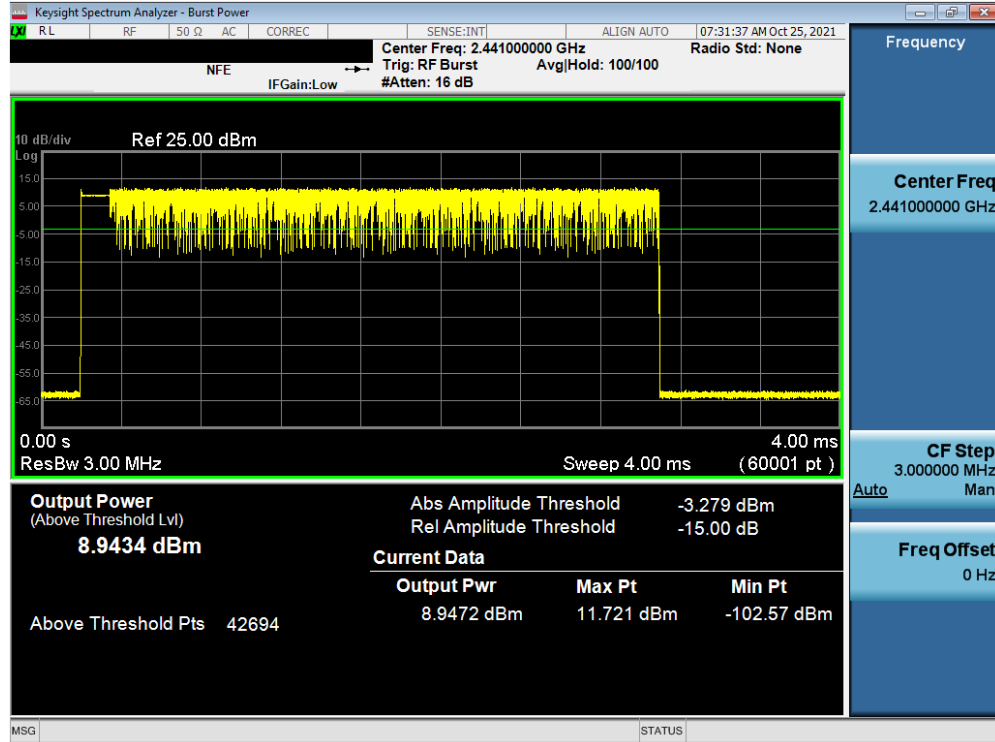

Plot 7-89. Average Conducted Power (3Mbps – Ch. 39) Antenna 2 iPA

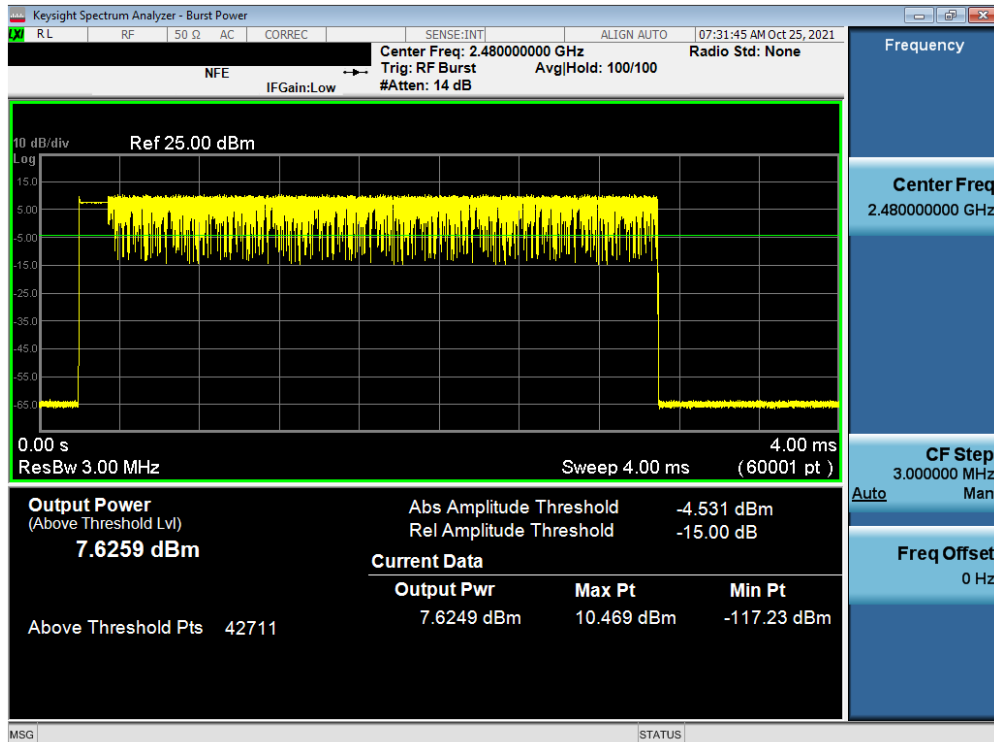

Plot 7-90. Average Conducted Power (3Mbps – Ch. 78) Antenna 2 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 61 of 129

Dual Antenna

Frequency [MHz]	Data Rate [Mbps]	Power Scheme	Channel No.	ANT1 Peak Conducted Power		ANT2 Peak Conducted Power		Dual Peak Conducted Power	
				[dBm]	[mW]	[dBm]	[mW]	[dBm]	[mW]
2402	1.0	iPA	0	12.48	17.713	11.97	15.722	15.24	33.435
2441	1.0	iPA	39	12.23	16.715	12.30	16.967	15.27	33.682
2480	1.0	iPA	78	11.19	13.146	11.21	13.204	14.21	26.350
2402	2.0	iPA	0	10.08	10.179	10.62	11.543	13.37	21.721
2441	2.0	iPA	39	11.05	12.741	10.78	11.978	13.93	24.719
2480	2.0	iPA	78	9.96	9.917	10.15	10.356	13.07	20.274
2402	3.0	iPA	0	10.77	11.948	11.30	13.502	14.06	25.450
2441	3.0	iPA	39	12.70	18.634	11.69	14.740	15.23	33.374
2480	3.0	iPA	78	10.21	10.503	9.57	9.064	12.92	19.566

Table 7-6. Dual Bluetooth Conducted Output Power – Peak Measurements

Frequency [MHz]	Data Rate [Mbps]	Power Scheme	Channel No.	ANT1 Avg Conducted Power		ANT2 Avg Conducted Power		Dual Avg Conducted Power	
				[dBm]	[mW]	[dBm]	[mW]	[dBm]	[mW]
2402	1.0	iPA	0	11.14	13.000	10.52	11.284	13.85	24.284
2441	1.0	iPA	39	11.00	12.585	10.96	12.463	13.99	25.047
2480	1.0	iPA	78	10.15	10.354	9.80	9.549	12.99	19.904
2402	2.0	iPA	0	8.50	7.079	8.57	7.188	11.54	14.268
2441	2.0	iPA	39	8.45	6.998	8.94	7.842	11.71	14.840
2480	2.0	iPA	78	7.31	5.383	7.72	5.909	10.53	11.292
2402	3.0	iPA	0	8.02	6.336	8.47	7.031	11.26	13.367
2441	3.0	iPA	39	8.53	7.133	8.93	7.821	11.75	14.954
2480	3.0	iPA	78	7.50	5.625	7.76	5.963	10.64	11.588

Table 7-7. Dual Bluetooth Conducted Output Power – Average Measurements

FCC ID: A3LSMS906E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 62 of 129

Note:

Sample Dual Calculations:

At 2402MHz in Dual (1 Mbps - iPa) mode, the average conducted output power was measured to be 11.14 dBm for Antenna-1 and 10.52 dBm for Antenna-2.

Antenna 1 + Antenna 2 = MIMO


$$(11.14 \text{ dBm} + 10.52 \text{ dBm}) = (13.000 \text{ mW} + 11.284 \text{ mW}) = 24.284 \text{ mW} = 13.85 \text{ dBm}$$

At 2402MHz in Dual (1 Mbps - iPa) mode, the peak conducted output power was measured to be 12.48 dBm for Antenna-1 and 11.69 dBm for Antenna-2.


Antenna 1 + Antenna 2 = MIMO

$$(12.48 \text{ dBm} + 11.97 \text{ dBm}) = (17.713 \text{ mW} + 15.722 \text{ mW}) = 33.435 \text{ mW} = 15.24 \text{ dBm}$$

FCC ID: A3LSMS906E	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 63 of 129

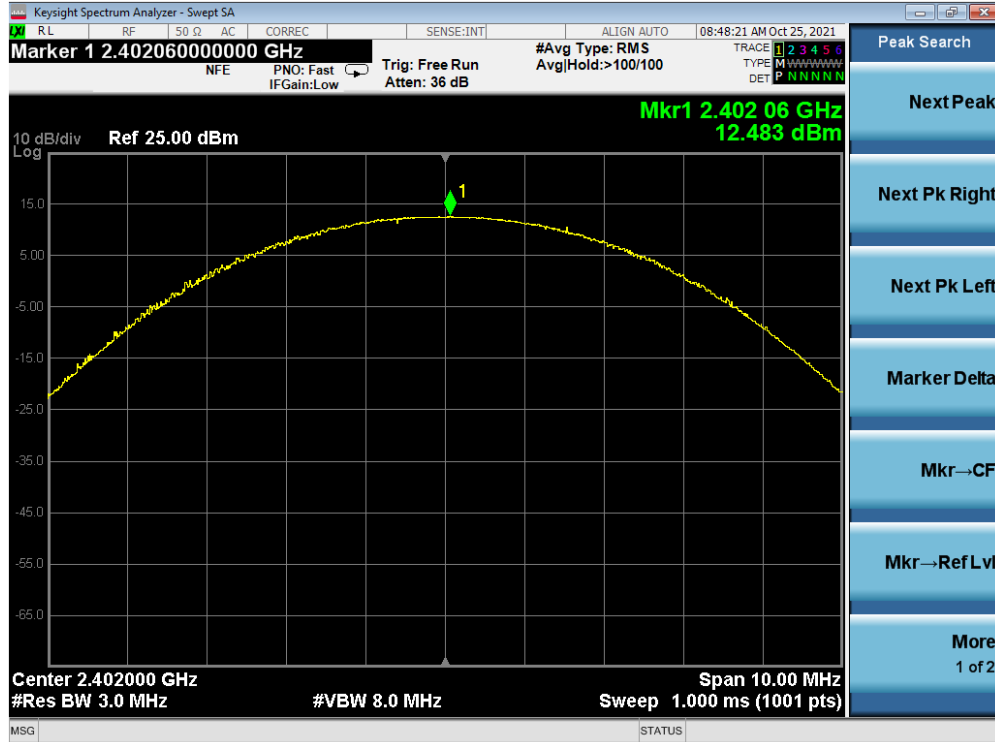


Plot 7-91. Dual Bluetooth Peak Conducted Power (1Mbps – Ch. 0) Antenna 1 iPA

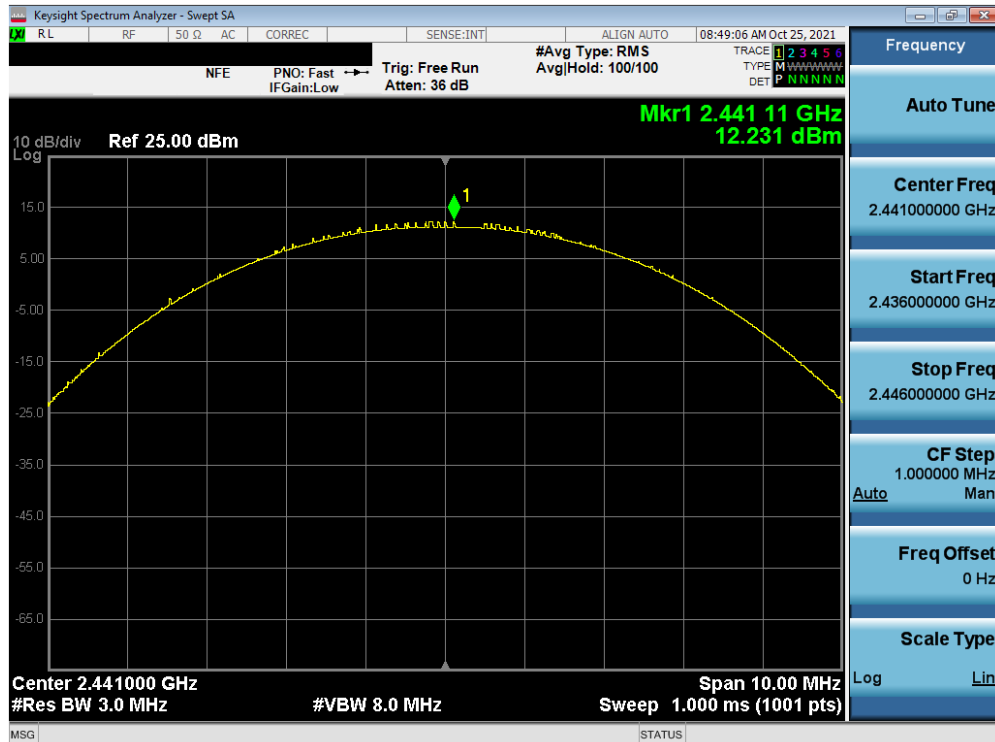


Plot 7-92. Dual Bluetooth Peak Conducted Power (1Mbps – Ch. 39) Antenna 1 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 64 of 129

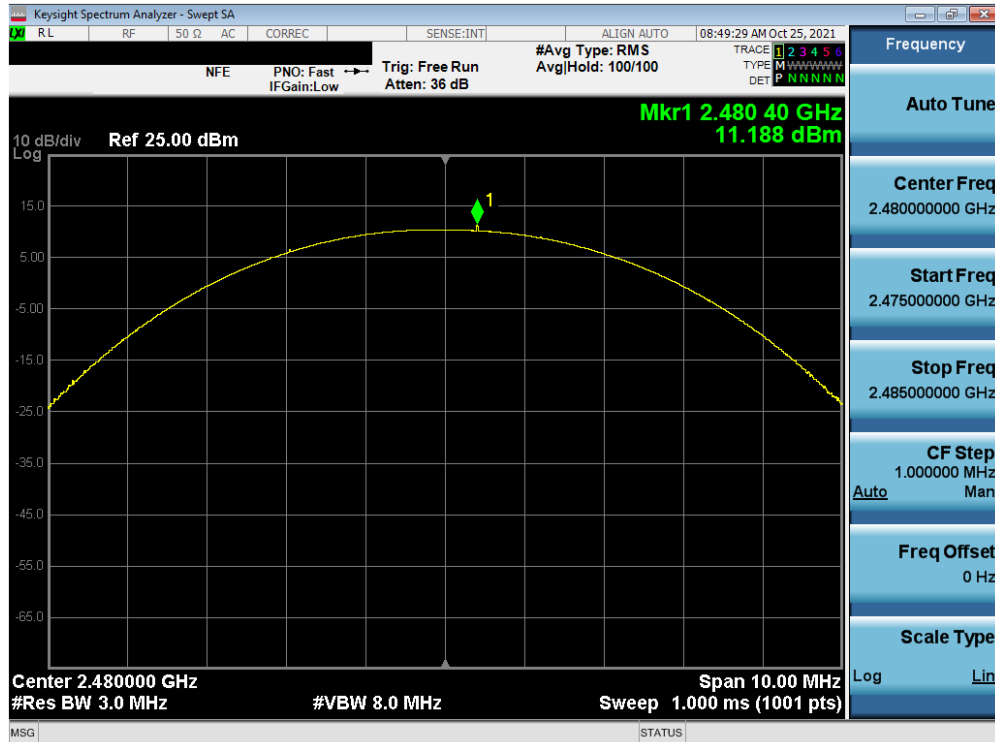


Plot 7-93. Dual Bluetooth Peak Conducted Power (1Mbps – Ch. 78) Antenna 1 iPA

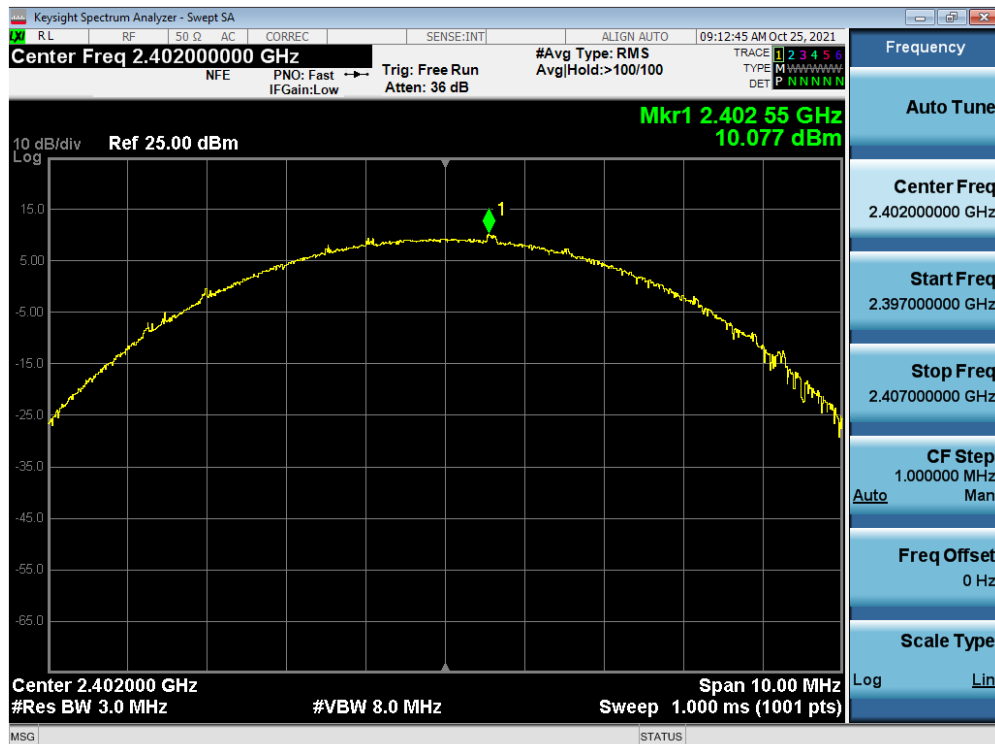


Plot 7-94. Dual Bluetooth Peak Conducted Power (2Mbps – Ch. 0) Antenna 1 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 65 of 129

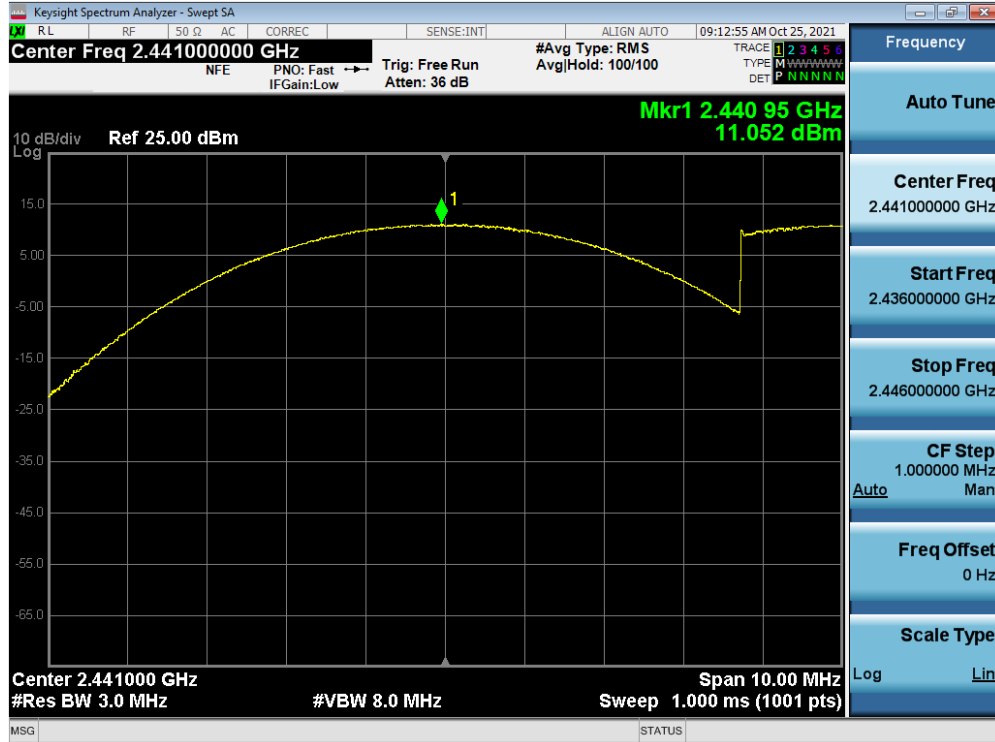


Plot 7-95. Dual Bluetooth Peak Conducted Power (2Mbps – Ch. 39) Antenna 1 iPA

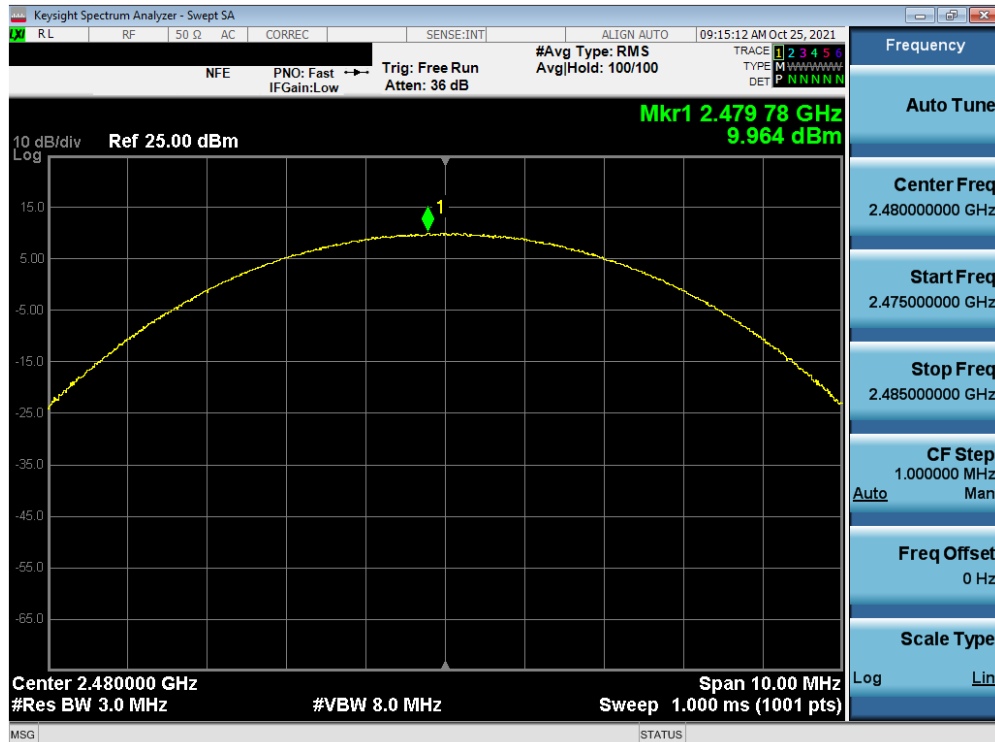

Plot 7-96. Dual Bluetooth Peak Conducted Power (2Mbps – Ch. 78) Antenna 1 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 66 of 129

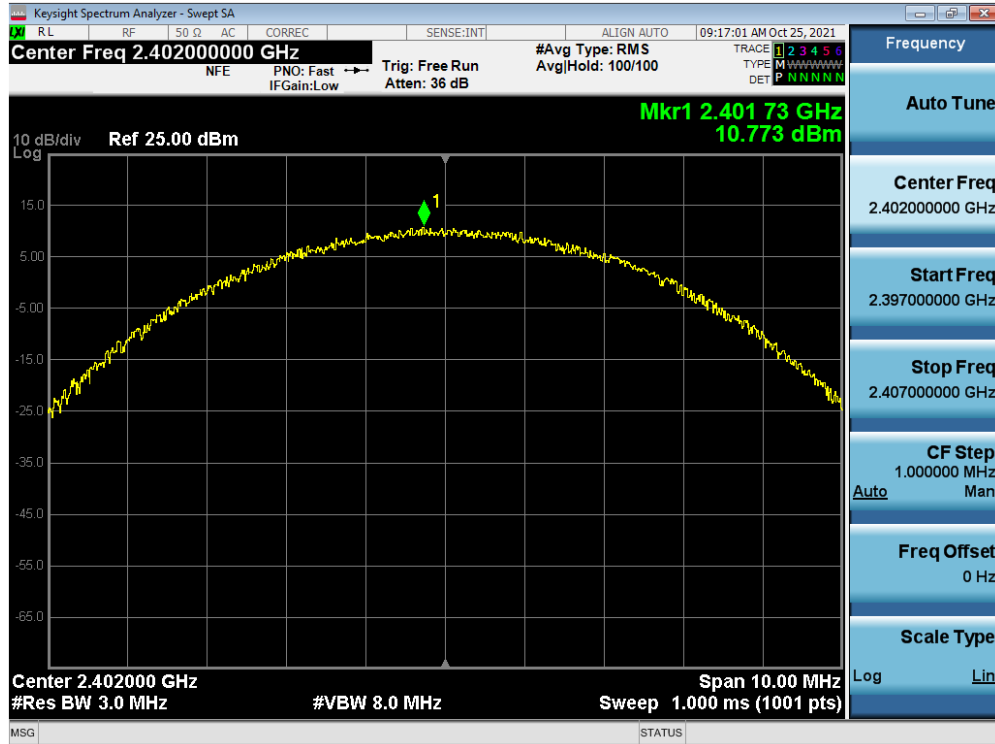


Plot 7-97. Dual Bluetooth Peak Conducted Power (3Mbps – Ch. 0) Antenna 1 iPA




Plot 7-98. Dual Bluetooth Peak Conducted Power (3Mbps – Ch. 39) Antenna 1 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 67 of 129

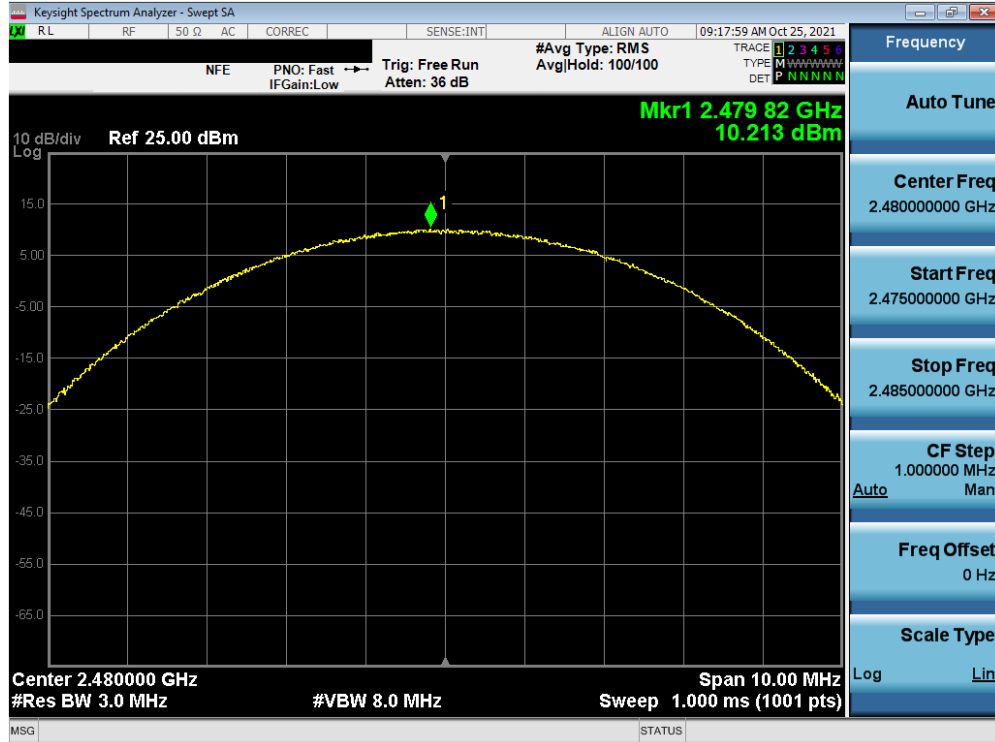


Plot 7-99. Dual Bluetooth Peak Conducted Power (3Mbps – Ch. 78) Antenna 1 iPA

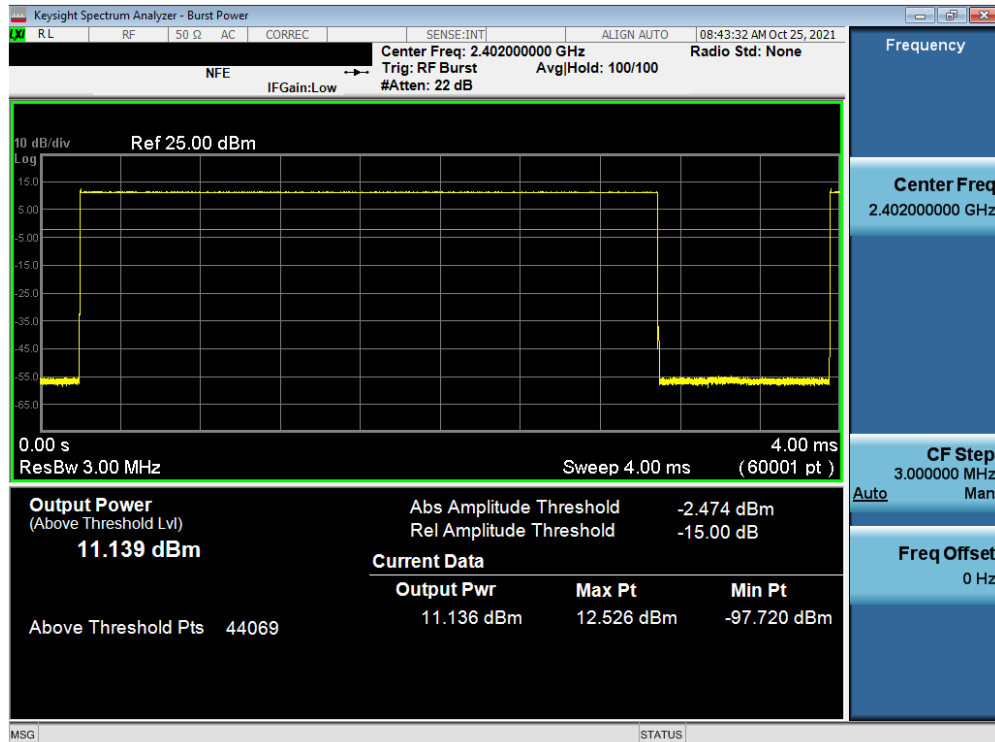


Plot 7-100. Dual Bluetooth Average Conducted Power (1Mbps – Ch. 0) Antenna 1 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 68 of 129

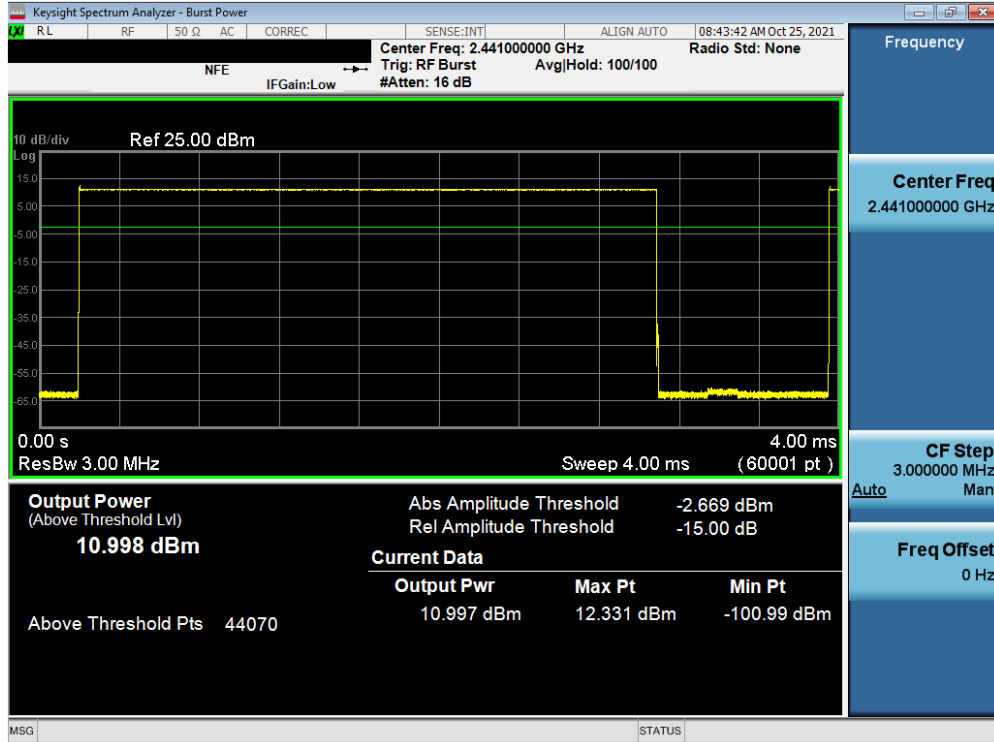


Plot 7-101. Dual Bluetooth Average Conducted Power (1Mbps – Ch. 39) Antenna 1 iPA

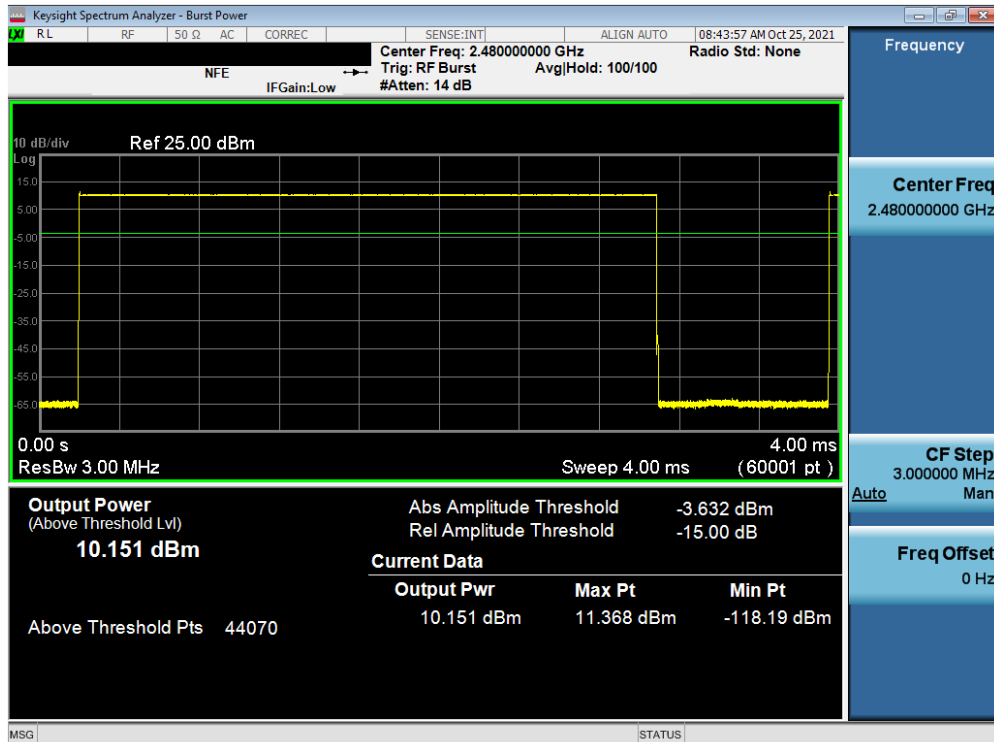


Plot 7-102. Dual Bluetooth Average Conducted Power (1Mbps – Ch. 78) Antenna 1 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 69 of 129

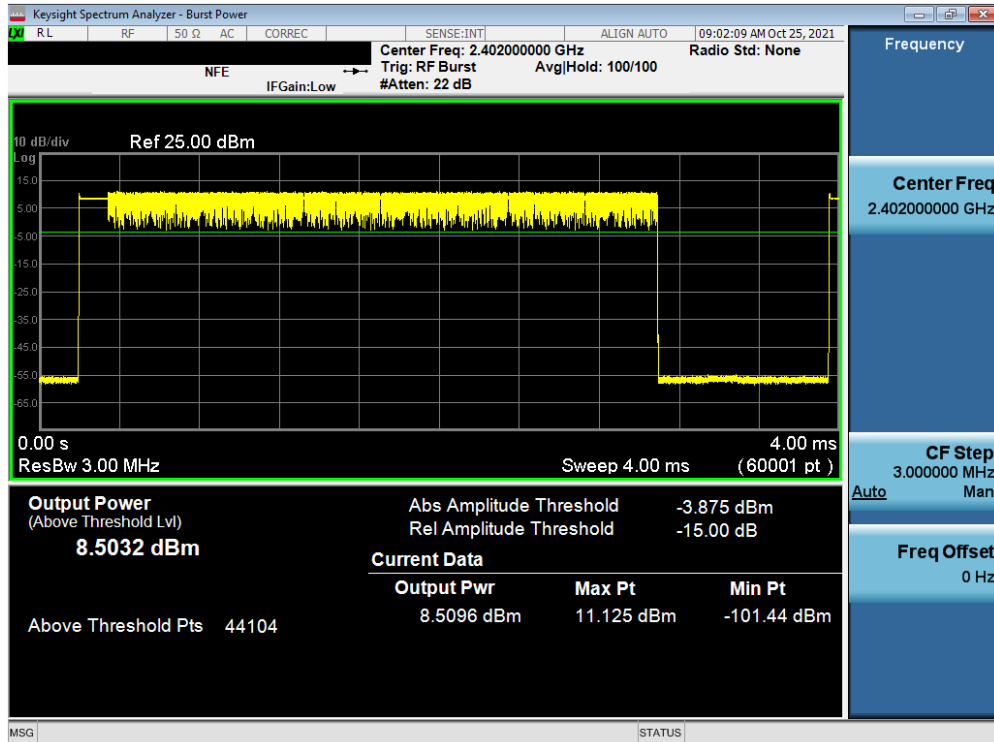


Plot 7-103. Dual Bluetooth Average Conducted Power (2Mbps – Ch. 0) Antenna 1 iPA

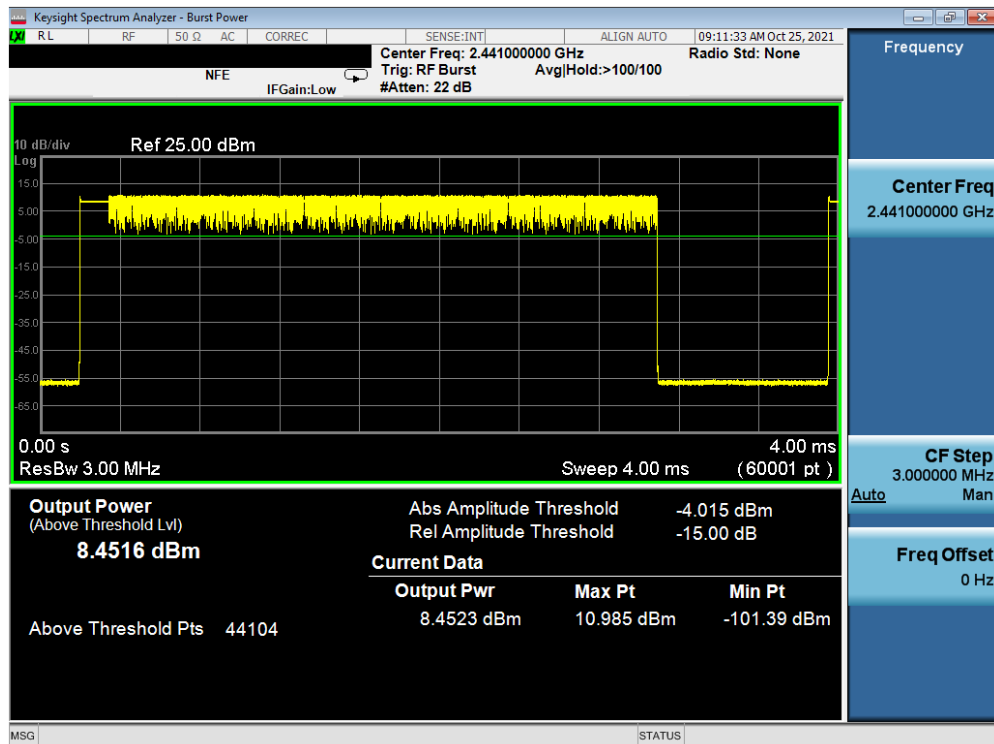


Plot 7-104. Dual Bluetooth Average Conducted Power (2Mbps – Ch. 39) Antenna 1 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 70 of 129

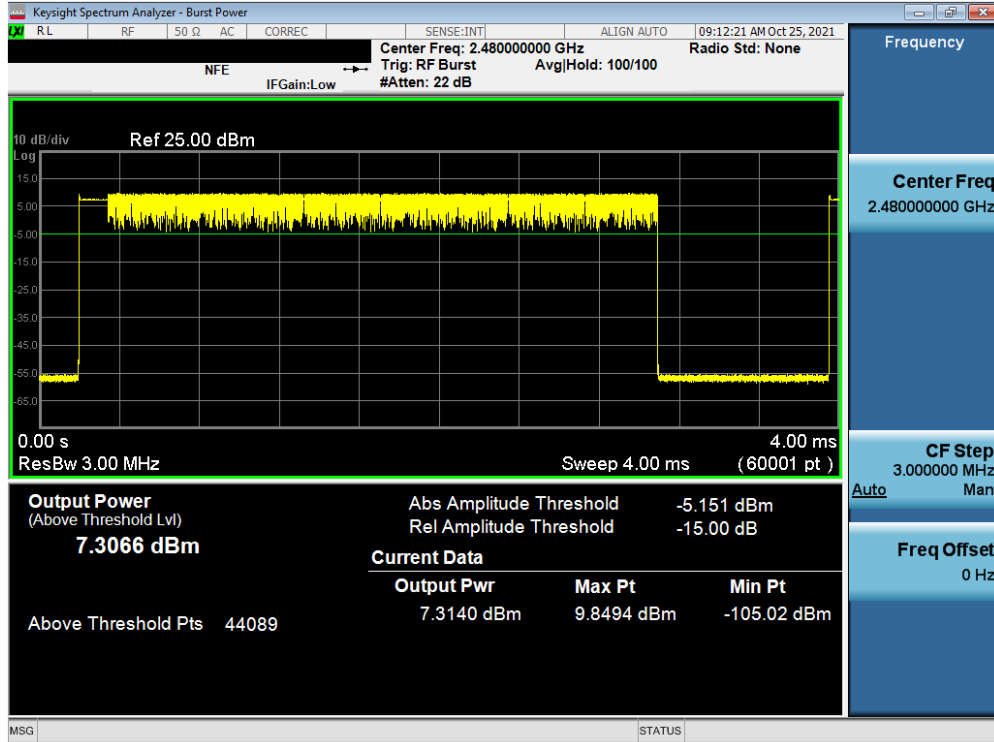


Plot 7-105. Dual Bluetooth Average Conducted Power (2Mbps – Ch. 78) Antenna 1 iPA

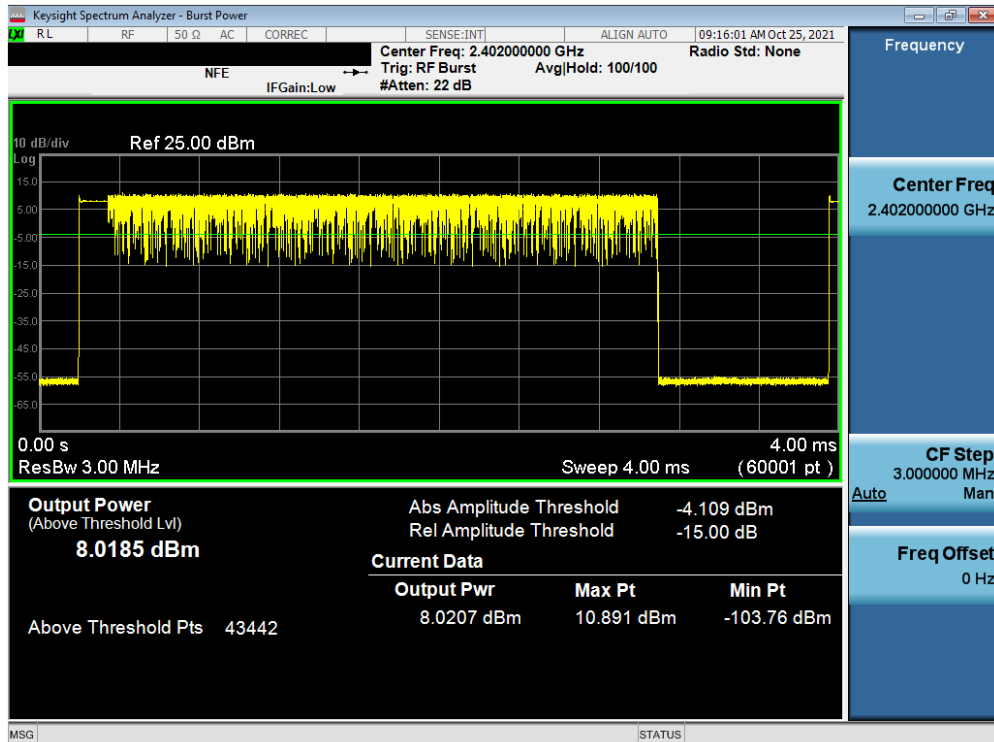


Plot 7-106. Dual Bluetooth Average Conducted Power (3Mbps – Ch. 0) Antenna 1 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 71 of 129

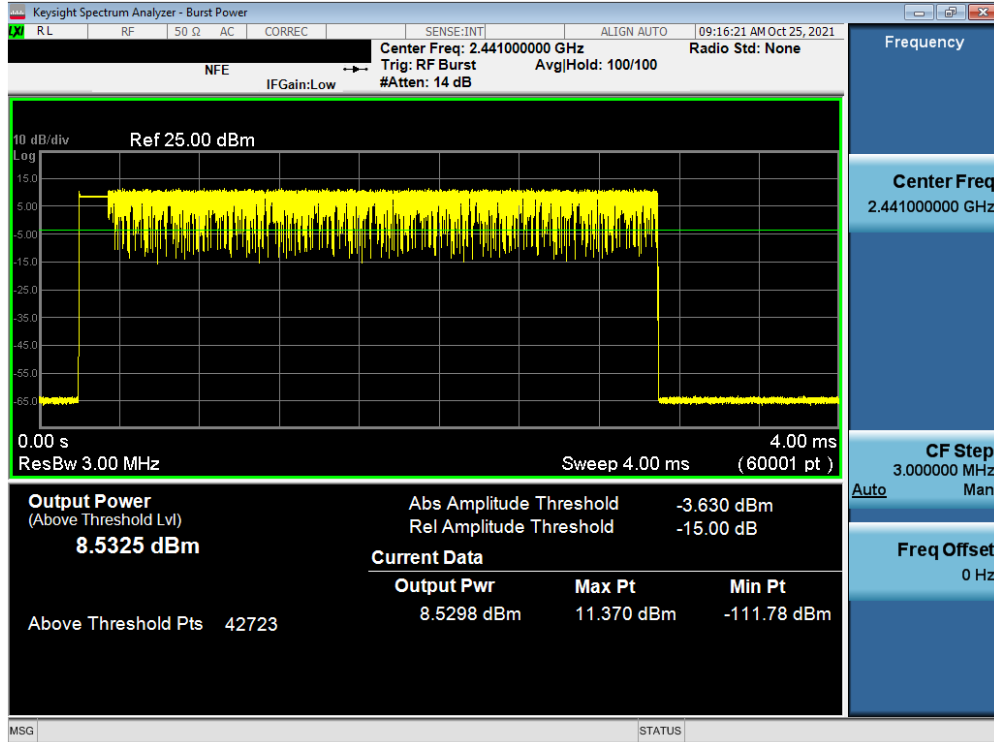


Plot 7-107. Dual Bluetooth Average Conducted Power (3Mbps – Ch. 39) Antenna 1 iPA

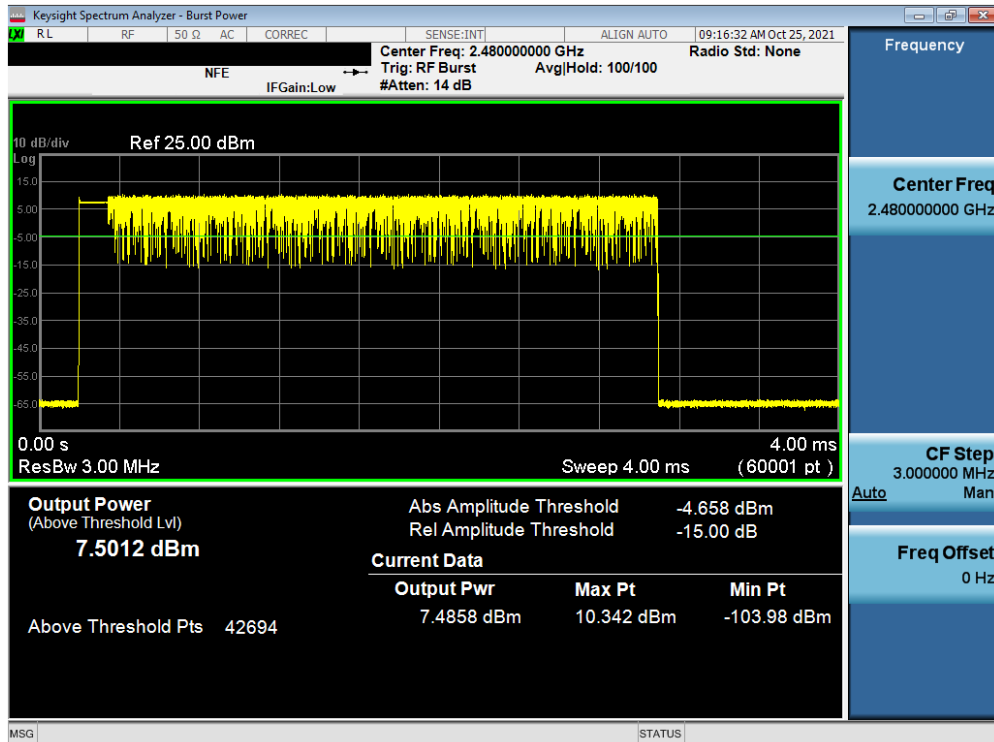


Plot 7-108. Dual Bluetooth Average Conducted Power (3Mbps – Ch. 78) Antenna 1 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 72 of 129

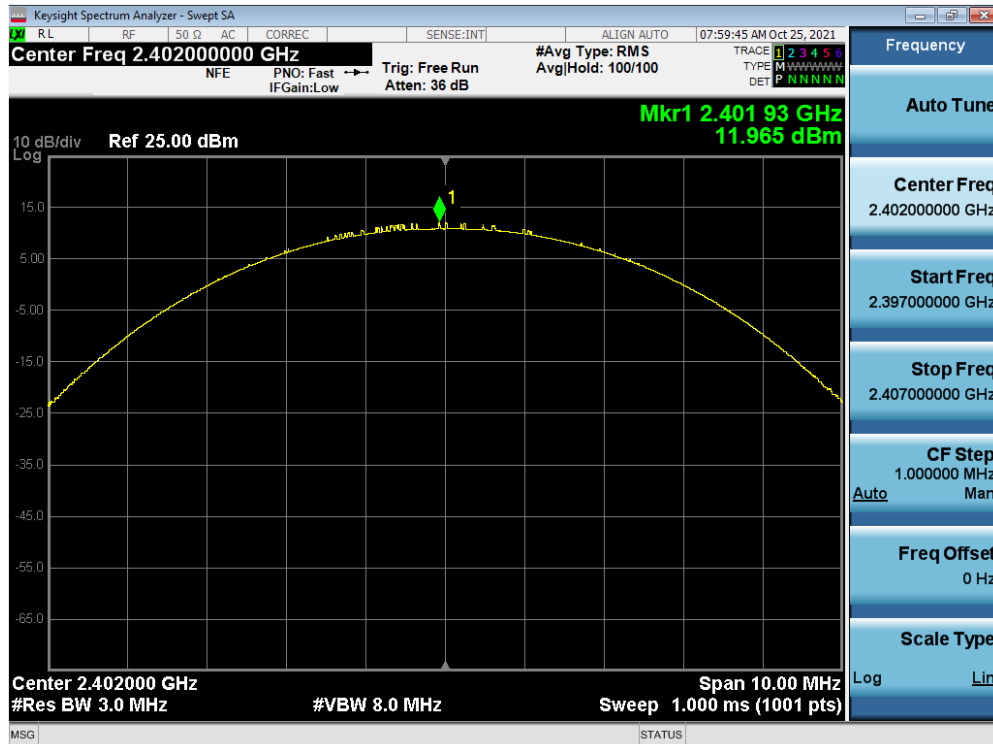


Plot 7-109. Dual Bluetooth Peak Conducted Power (1Mbps – Ch. 0) Antenna 2 iPA

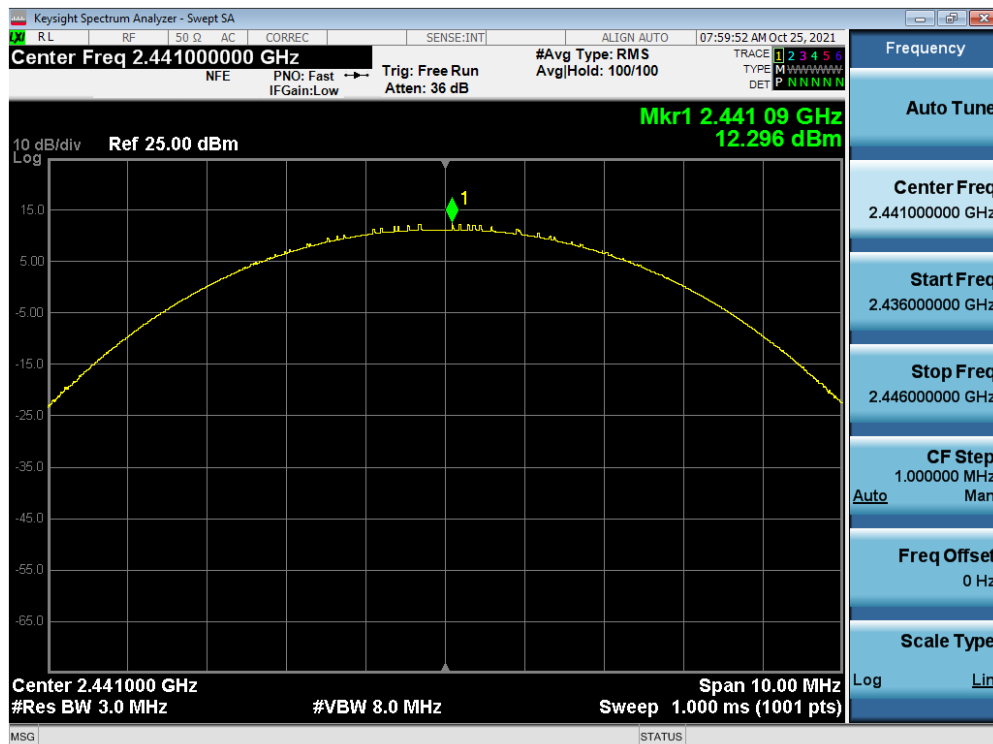


Plot 7-110. Dual Bluetooth Peak Conducted Power (1Mbps – Ch. 39) Antenna 2 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 73 of 129

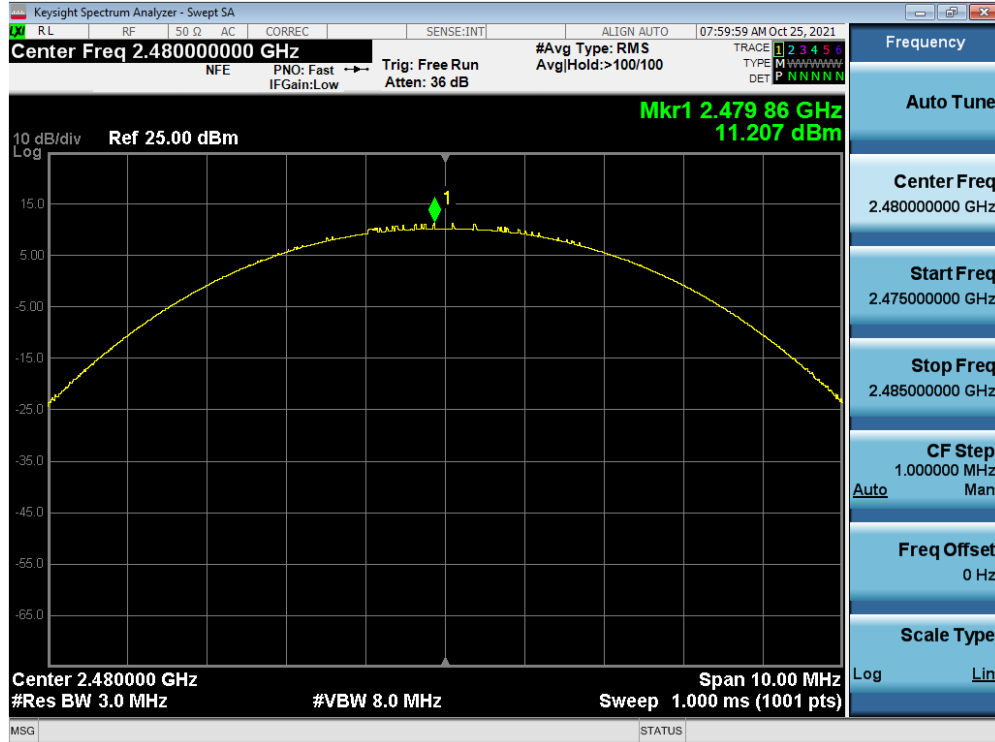


Plot 7-111. Dual Bluetooth Peak Conducted Power (1Mbps – Ch. 78) Antenna 2 iPA

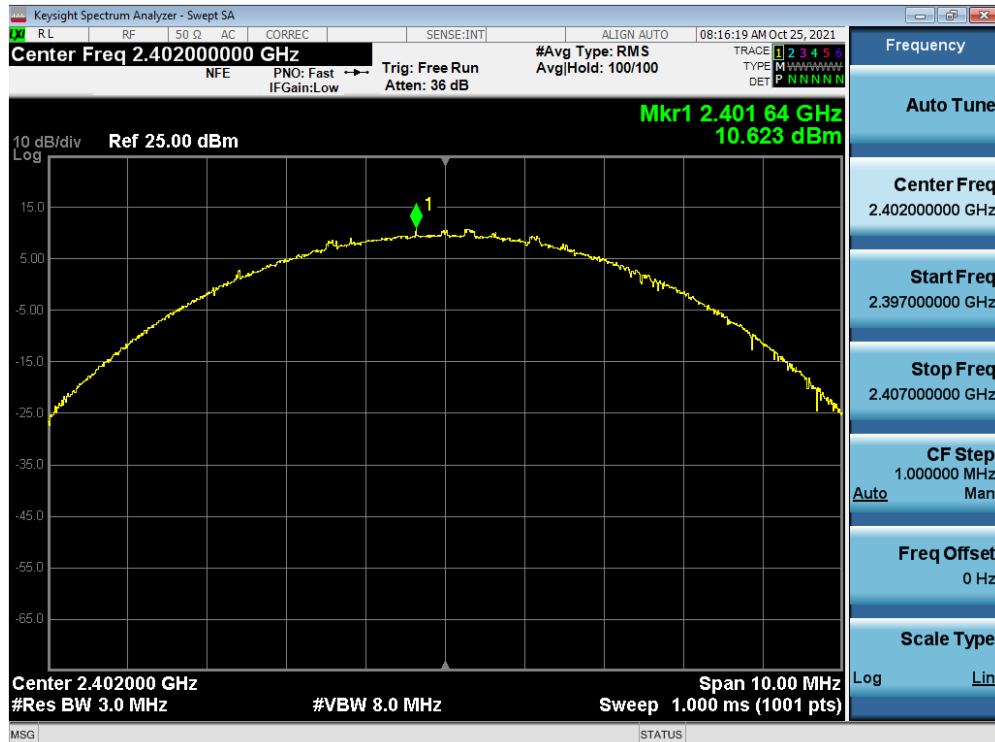


Plot 7-112. Dual Bluetooth Peak Conducted Power (2Mbps – Ch. 0) Antenna 2 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 74 of 129

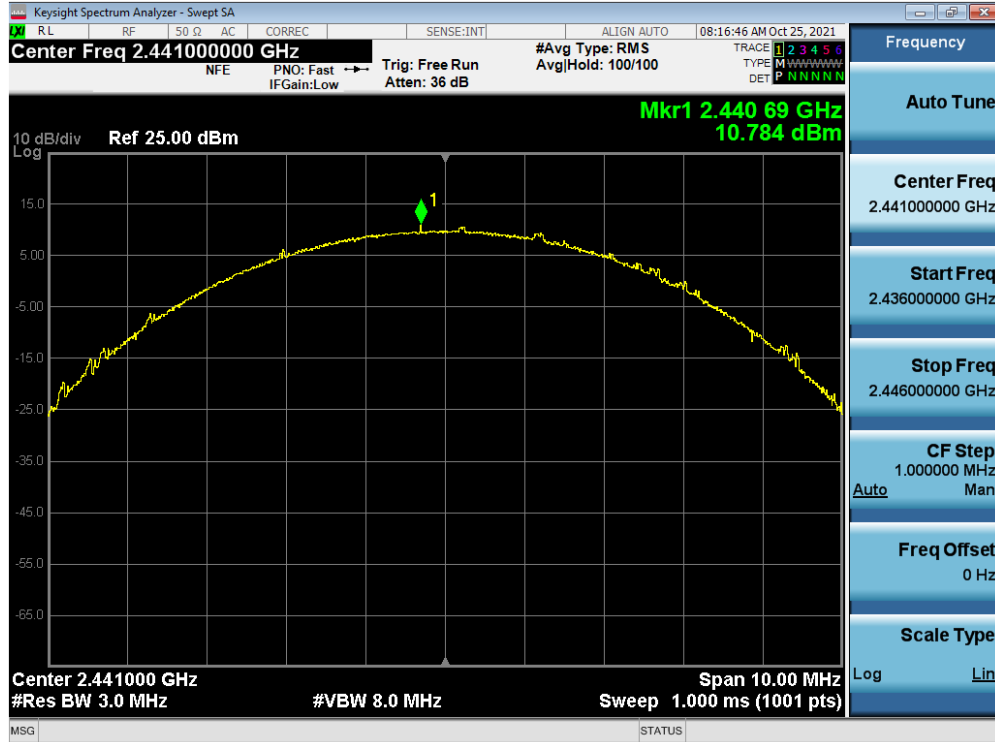


Plot 7-113. Dual Bluetooth Peak Conducted Power (2Mbps – Ch. 39) Antenna 2 iPA

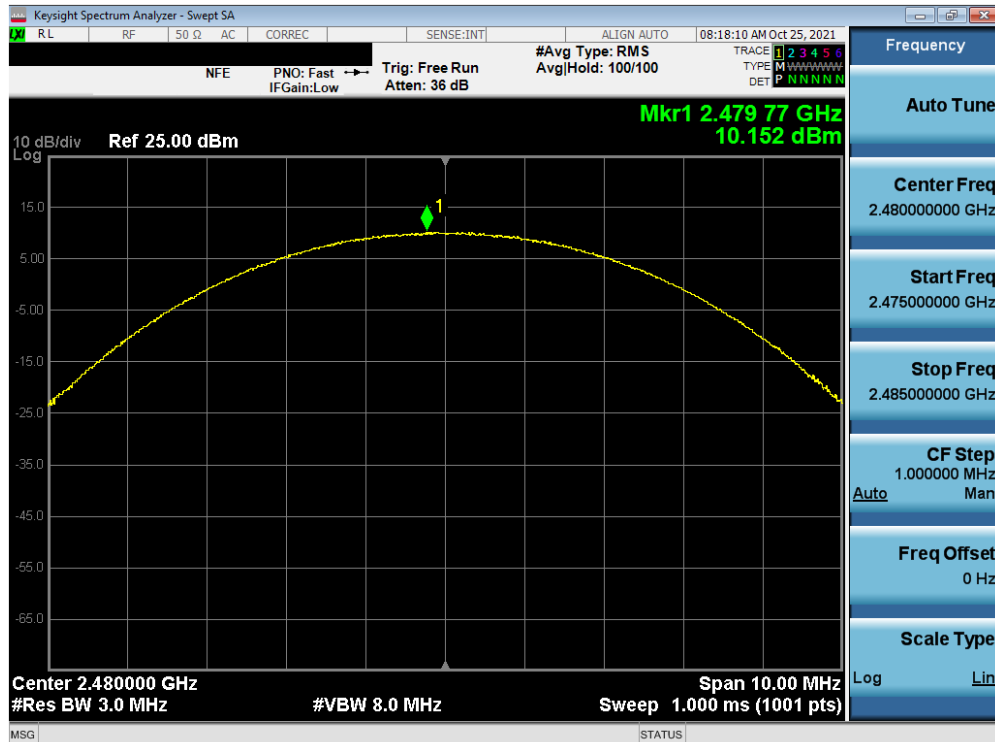


Plot 7-114. Dual Bluetooth Peak Conducted Power (2Mbps – Ch. 78) Antenna 2 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 75 of 129

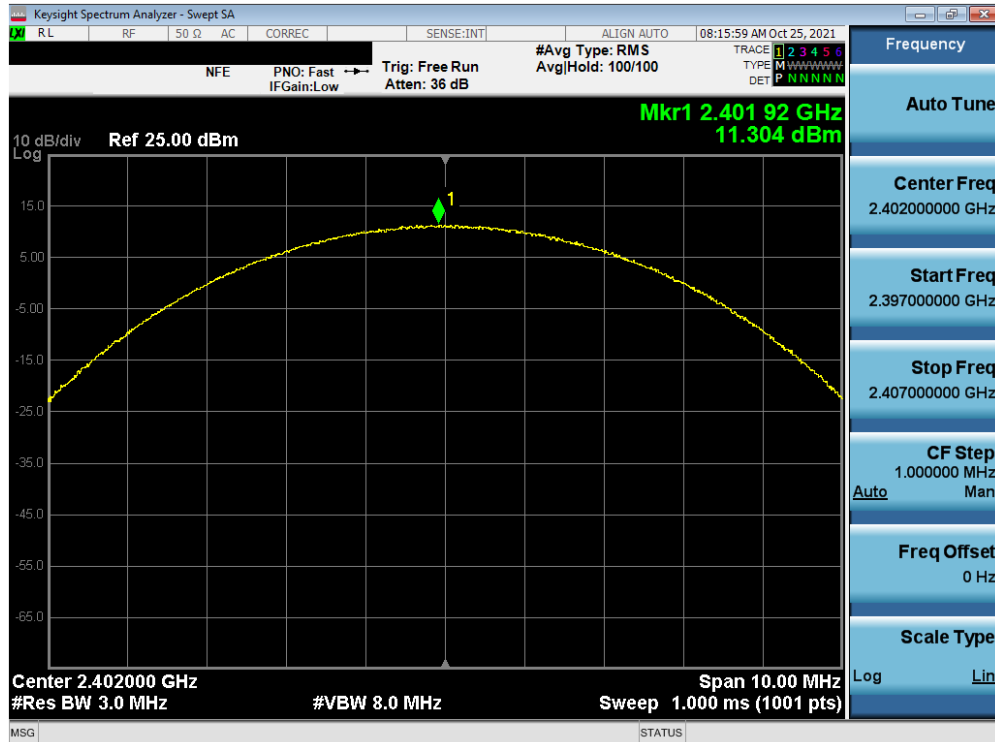

Plot 7-115. Dual Bluetooth Peak Conducted Power (3Mbps – Ch. 0) Antenna 2 iPA

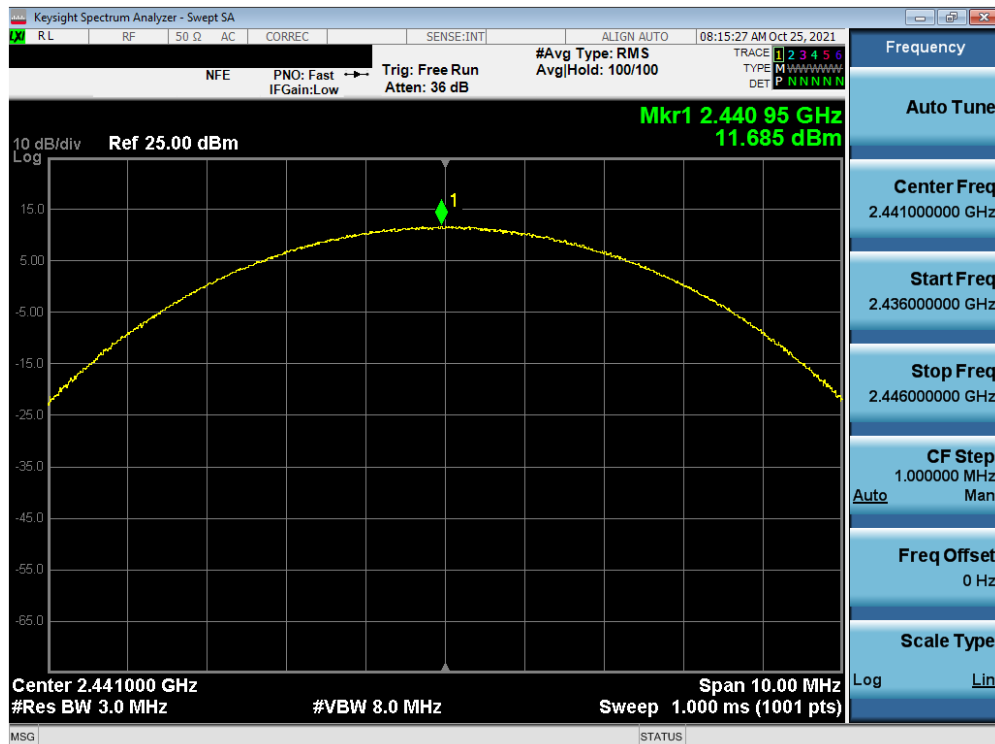

Plot 7-116. Dual Bluetooth Peak Conducted Power (3Mbps – Ch. 39) Antenna 2 iPA

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-14.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 76 of 129