



MEASUREMENT REPORT

FCC Part 15F ULTRA WIDEBAND

Applicant Name:

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

12/7 – 12/9/2021

Test Report Issue Date:

1/5/2021

Test Site/Location:

PCTEST Lab. Yongin-Si, Gyeonggi-do, South Korea

Test Report Serial No.:

1M2112030140-01.A3L

FCC ID:

A3LSMS906U

APPLICANT:

Samsung Electronics Co., Ltd.

Application Type:

Class II Permissive Change

Model:

SM-S906U

Additional Models:

SM-S906U1

EUT Type:

Portable Handset

FCC Classification:

Ultra Wideband (UWB)

FCC Rule Parts(s):

FCC Part 15 Subpart F (15.519, 15.521)

UWB Classification:

Hand-held Communication Device

Test Procedure(s):

ANSI C63.10-2013, KDB 393764 D01

Class II Permissive Change:

Please see FCC change document

Original Grant Date:

12/7/2021

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and has been tested in accordance with the measurement procedures specified in ANSI C63.10-2013 (See Test Report). These measurements were performed with no deviation from the standards. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Prepared by



Reviewed by

FCC ID: A3LSMS906U		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 1 of 39

TABLE OF CONTENTS

1.0	Introduction	3
1.1	Scope.....	3
1.2	PCTEST Test Location	3
1.3	Test Facility / Accreditations	3
2.0	PRODUCT INFORMATION	4
2.1	Equipment Description.....	4
2.2	Device Capabilities	4
2.3	Test Configuration	4
2.4	EMI Suppression Device(s)/Modifications.....	4
2.5	Antenna Description.....	4
2.6	Software and Firmware.....	4
3.0	DESCRIPTION OF TESTS	5
3.1	Evaluation Procedure.....	5
3.2	AC Line Conducted Emissions	5
3.3	Radiated Emissions	6
3.4	Environmental Conditions	6
4.0	Antenna Requirements	7
5.0	Measurement Uncertainty	8
6.0	TEST EQUIPMENT CALIBRATION DATA.....	9
7.0	TEST DATA	10
7.1	Summary	10
7.2	10dBc Bandwidth Measurement.....	11
7.3	Peak Power and Maximum Average Emissions	21
7.4	Radiated Measurement Data above 960MHz.....	26
7.5	Radiated Spurious Emissions Measurements – Below 1GHz.....	31
7.6	Line Conducted Measurement Data	35
8.0	CONCLUSION	39

FCC ID: A3LSMS906U	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 2 of 39

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do, 16954, South Korea. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Yongin-si, Gyeonggi-do, 16954, South Korea.

- PCTEST is an ISO 17025-2017 accredited test facility under the National Voluntary Laboratory Accreditation Program (NVLAP) with Certificate number 600143-0 for Specific Absorption Rate (SAR), where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- PCTEST facility is a registered (26168) test laboratory with the site description on file with ISSED.

FCC ID: A3LSMS906U		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 3 of 39

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMS906U**. The test data contained in this report pertains only to the EUT's ultra-wideband transmitter.

Test Device Serial No.: 2297M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR (FR1 and FR2), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz and 6GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer, Ultra Wideband

2.3 Test Configuration

The EUT was tested per the guidance of Section 10 of ANSI C63.10-2013. The EUT setup procedures of ANSI C63.10-2013 were used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Section 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, respectively.

The Equipment Under Test (EUT) was capable of operating on two antennas in two separate modes [HPRF, preamble 27] and [BPRF, preamble 9~12]. Care was taken to ensure the worst-case modes were investigated and reported.

For more information, please see Section 7.0 for test data and the test setup photos document for the test setup photographs.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

2.5 Antenna Description

Following antenna was used for the testing.

Frequency [GHz]	Antenna 1 Gain [dBi]	Antenna 2 Gain [dBi]
6.5	-5.0	-8.6
8.0	-4.4	-3.9

Table 2-1. Maximum Peak Antenna Gain

2.6 Software and Firmware

The test was conducted with firmware version S906USQU1AUKK installed on the EUT.

FCC ID: A3LSMS906U	 Proud to be part of 	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 4 of 39

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2014) was used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by SY cooperation RF Enclosures. The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.6. The EMI Receiver mode of the R&S ESW was used to perform AC line conducted emissions testing. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.20.01.

FCC ID: A3LSMS906U	 Proud to be part of 	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 5 of 39

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Clause 5, Figure 5.7 of ANSI C63.4-2014. A raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. . An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMS906U	 Proud to be part of 	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 6 of 39

4.0 ANTENNA REQUIREMENTS

Except from §15.203 of the FCC Rules/Regulations:

“An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna(s) of the EUT are permanently attached
- There are no provisions for a connection to an external antenna

The EUT complies with the requirements of §15.203.

FCC ID: A3LSMS906U	 Proud to be part of 	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 7 of 39

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07

FCC ID: A3LSMS906U	 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset	Page 8 of 39

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Huber+Suhner	SF102/11SK/11SK/1500	RF Cable	N/A			SN 804225/2
Huber+Suhner	SF102/11SK/11SK/2000	RF Cable	N/A			SN 804223/2
Keysight Technologies	N9030B	PXA Signal Analyzer	5/11/2021	Annual	5/10/2022	MY57142018
Mini-Circuits	BW-N10W5+	Attenuator	5/24/2021	Annual	5/23/2022	2106
Mini-Circuits	BW-N10W5+	Attenuator	5/24/2021	Annual	5/23/2022	2106
NARDA	180-442A-KF	Horn Antenna (Small)	11/20/2020	Biennial	11/19/2022	T058701-03
Rohde & Schwarz	TS-PR1840	Preamplifier	7/7/2021	Annual	7/6/2022	100049
Rohde & Schwarz	ENV216	Two-Line V-Network	5/24/2021	Annual	5/23/2022	101319
Rohde & Schwarz	ESW	EMI Test Receiver	7/6/2021	Annual	7/5/2022	101761
Rohde & Schwarz	FSW43	Signal & Spectrum Analyzer	9/15/2021	Annual	9/14/2022	101250
Rohde & Schwarz	TS-SFUNIT-Rx	Shielded Filter Unit	2/19/2021	Annual	2/18/2022	102131
Schwarzbeck	VULB9162	Broadband TRILOG Antenna	7/13/2021	Biennial	7/12/2023	9162-217
Sunol Sciences	DRH-118	Horn Antenna	7/14/2021	Biennial	7/13/2023	A102416-1

Table 6-1. Test Equipment Calibration Schedule

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMS906U	 Proud to be part of 	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 9 of 39

7.0 TEST DATA

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
FCC ID: A3LSMS906U
FCC Classification: Ultra-Wideband (UWB)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
§15.503, §15.519 (b)	10dBc Bandwidth	$\geq 500\text{MHz}$	RADIATED	PASS	Section 7.2
§15.519(e)	Maximum Peak Power	$< 0\text{dBm EIRP in } 50\text{MHz BW}$		PASS	Section 7.3
§15.519(c)	Maximum Average Emission in the range of 3100 – 10600 MHz	$< -41.3\text{ EIRP in dBm}$			Section 7.3
§15.519(c)	Radiated Emissions Above 960MHz	See table in 15.519(c) for details			Section 7.3, 7.4
§15.519(d)	Radiated Emissions in the 1164 – 1240Mhz and 1559 – 1610MHz GPS Bands	$< -85.3\text{ EIRP in dBm}$			Section 7.4
§15.519(c), §15.519(a)	Radiate Emissions Below 960MHz	Emissions in restricted bands must meet the radiated limits detailed in 15.209			Section 7.5
§15.207	AC Conducted Emissions 150kHz – 30MHz	$< \text{FCC } 15.207\text{ limits (RSS-Gen)}$	LINE CONDUCTED	PASS	Section 7.6

Table 7-1. Summary of Test Results

Notes:

Testing was performed for all cases, however, only the data collected for Channel 5 on Antenna 1 was found to deviate from the data in the original filing. Only data from this configuration is included in this test report.

FCC ID: A3LSMS906U		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 10 of 39

7.2 10dBc Bandwidth Measurement

§15.503(a), §15.519(b)

Test Overview and Limit

Per the definition of 15.503, the UWB Bandwidth is the frequency band bounded by the points that are 10 dB below the highest radiated emission, as based on the complete transmission system including the antenna.

The 10dB bandwidth of the UWB signal must remain fully within the 3100 – 10,600MHz band. The 10dB bandwidth of the UWB signal must also be greater than or equal to 500MHz.

Test Procedures Used

ANSI C63.10-2013 Section 10.1

Test Settings

1. RBW = 1MHz
2. VBW = 3MHz
3. Detector = Peak
4. Span was set wide enough to capture the 10dB points of the signal
5. Trace mode = max hold
6. Sweep = 2s
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument and Measurement Setup


FCC ID: A3LSMS906U	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 11 of 39

Frequency [GHz]	Channel	Preamble Id	Config	Mode	F _M [GHz]	F _L [GHz]	F _H [GHz]	F _C [GHz]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
6.5	5	9	SP0	BPRF	6.669	6.310	6.890	6.600	580	500	Pass
		9	SP1	BPRF	6.626	6.096	6.799	6.448	703	500	Pass
		9	SP3	BPRF	6.626	6.301	6.873	6.587	572	500	Pass
		10	SP0	BPRF	6.643	6.361	6.892	6.627	531	500	Pass
		10	SP1	BPRF	6.643	6.343	6.891	6.617	548	500	Pass
		10	SP3	BPRF	6.627	6.343	6.869	6.606	526	500	Pass
		11	SP0	BPRF	6.703	6.099	6.821	6.460	722	500	Pass
		11	SP1	BPRF	6.627	6.097	6.803	6.450	706	500	Pass
		11	SP3	BPRF	6.627	6.343	6.890	6.617	548	500	Pass
		12	SP0	BPRF	6.632	6.338	6.847	6.593	509	500	Pass
		12	SP1	BPRF	6.627	6.304	6.823	6.564	520	500	Pass
		12	SP3	BPRF	6.627	6.343	6.873	6.608	530	500	Pass
		27	SP0	HPRF	6.727	6.099	6.774	6.437	676	500	Pass
		27	SP1	HPRF	6.727	6.100	6.786	6.443	686	500	Pass
		27	SP3	HPRF	6.707	6.100	6.801	6.451	702	500	Pass


Table 7-2. UWB 10dBc Bandwidth Summary [ANT 1]

FCC ID: A3LSMS906U	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 12 of 39

10dBc Bandwidth Results

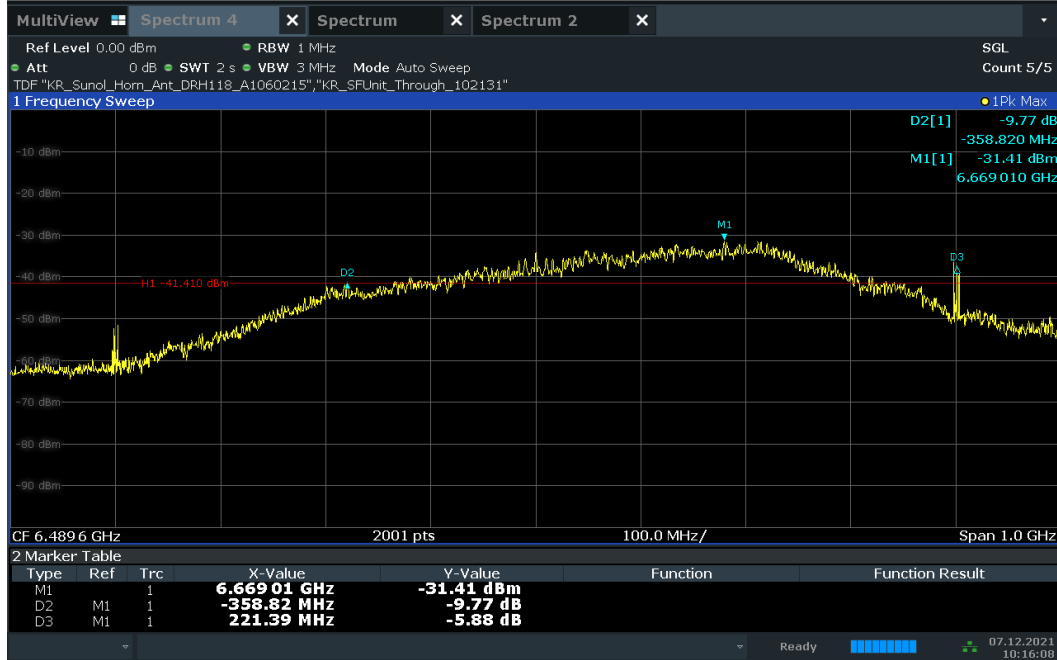


Plot 7-1. 10dBc Bandwidth – CH.5 - SP0 – Preamble 9

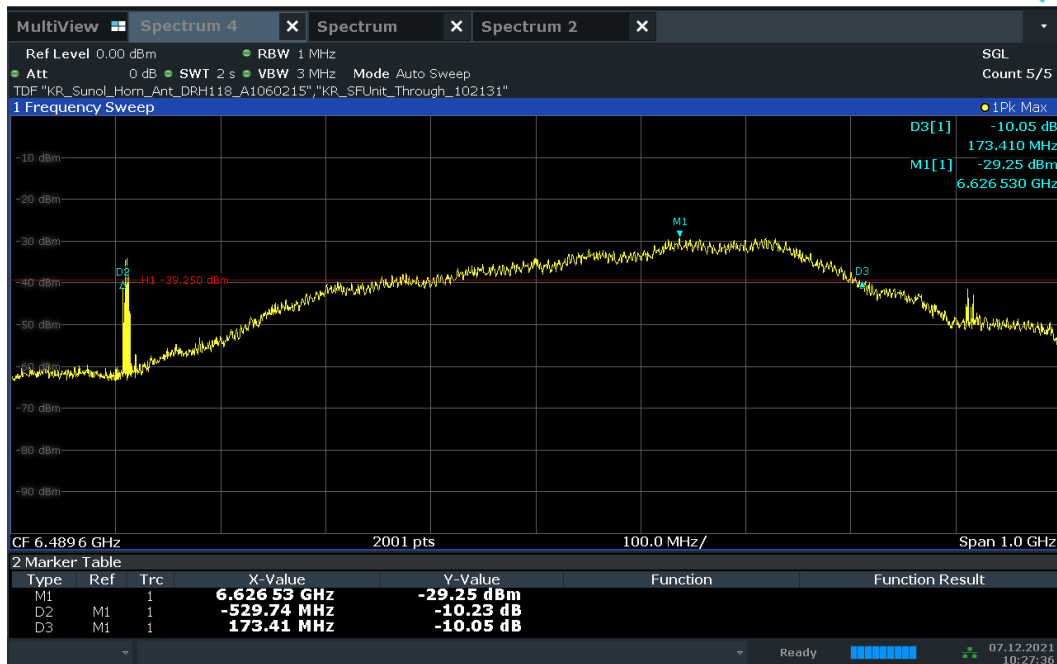


Plot 7-2. 10dBc Bandwidth – CH.5 – SP1 – Preamble 9

FCC ID: A3LSMS906U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 13 of 39

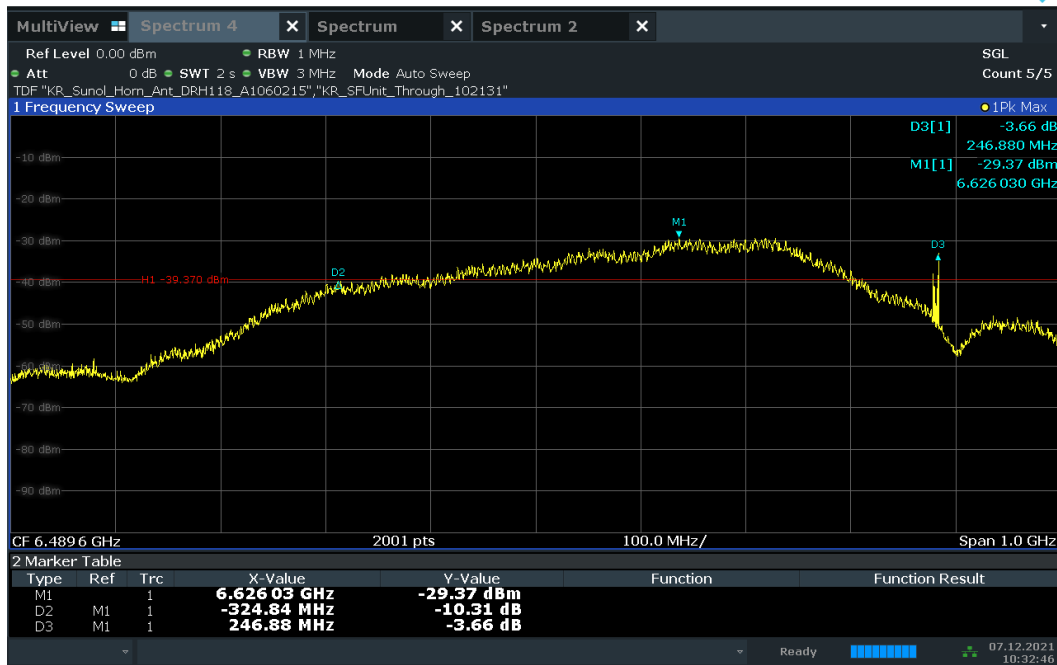


Plot 7-3. 10dBc Bandwidth – CH.5 – SP3 – Preamble 9

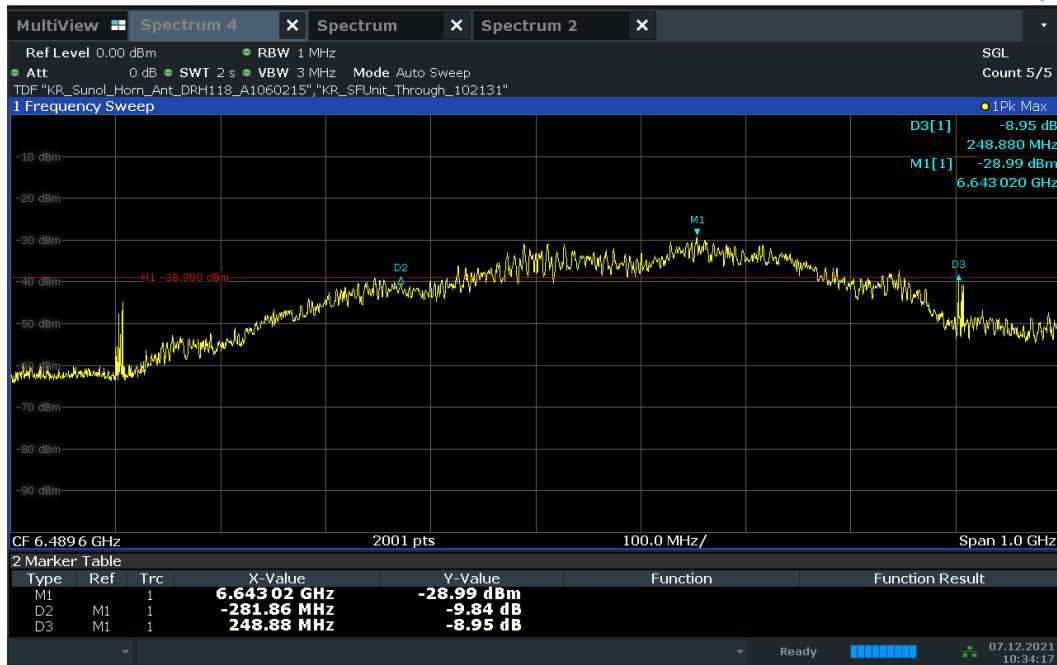


Plot 7-4. 10dBc Bandwidth – CH.5 - SP0 – Preamble 10

FCC ID: A3LSMS906U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 14 of 39

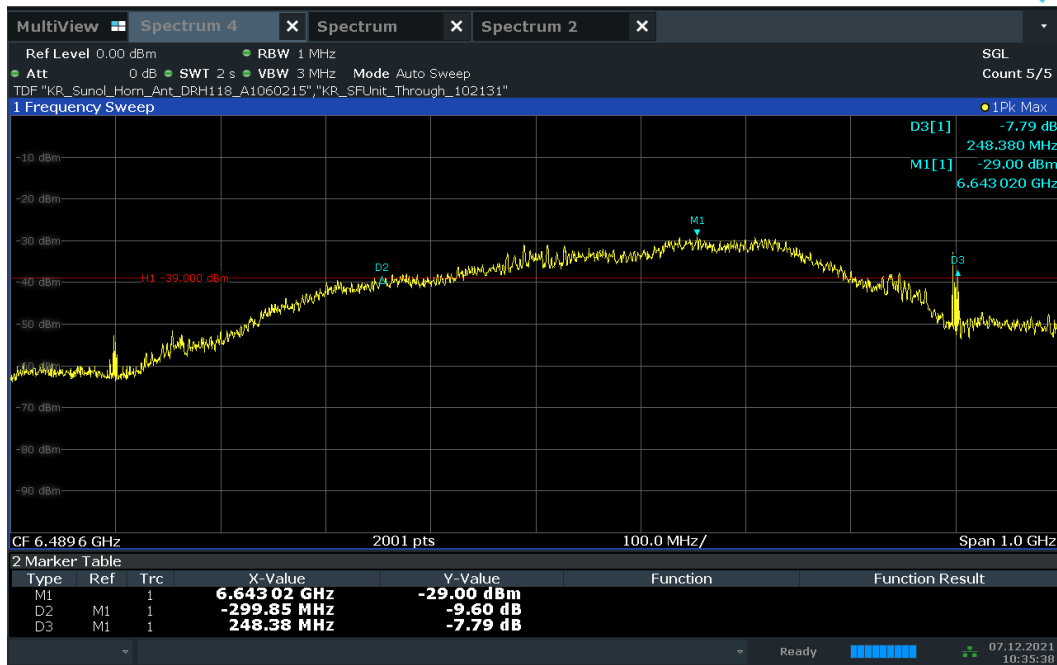


Plot 7-5. 10dBc Bandwidth – CH.5 – SP1 – Preamble 10

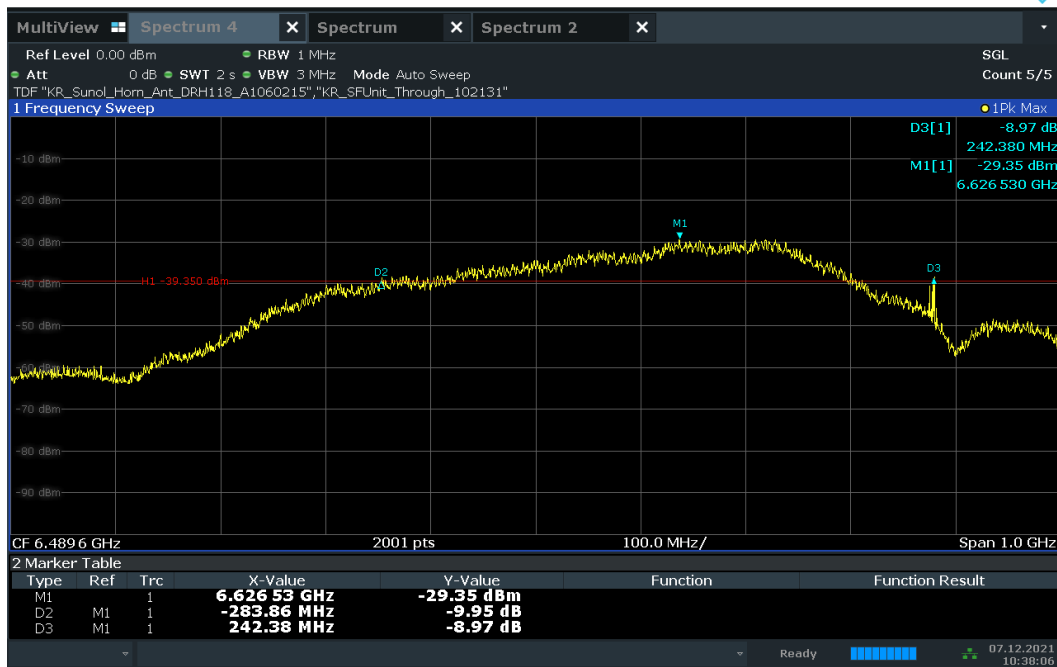


Plot 7-6. 10dBc Bandwidth – CH.5 – SP3 – Preamble 10

FCC ID: A3LSMS906U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 15 of 39

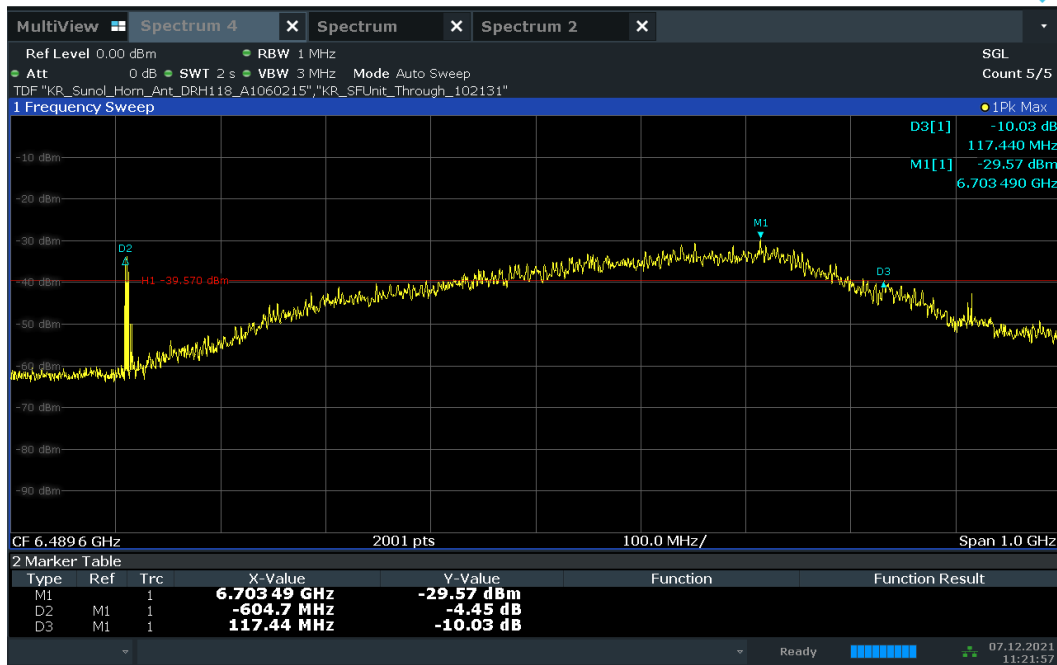


Plot 7-7. 10dBc Bandwidth – CH.5 - SP0 – Preamble 11

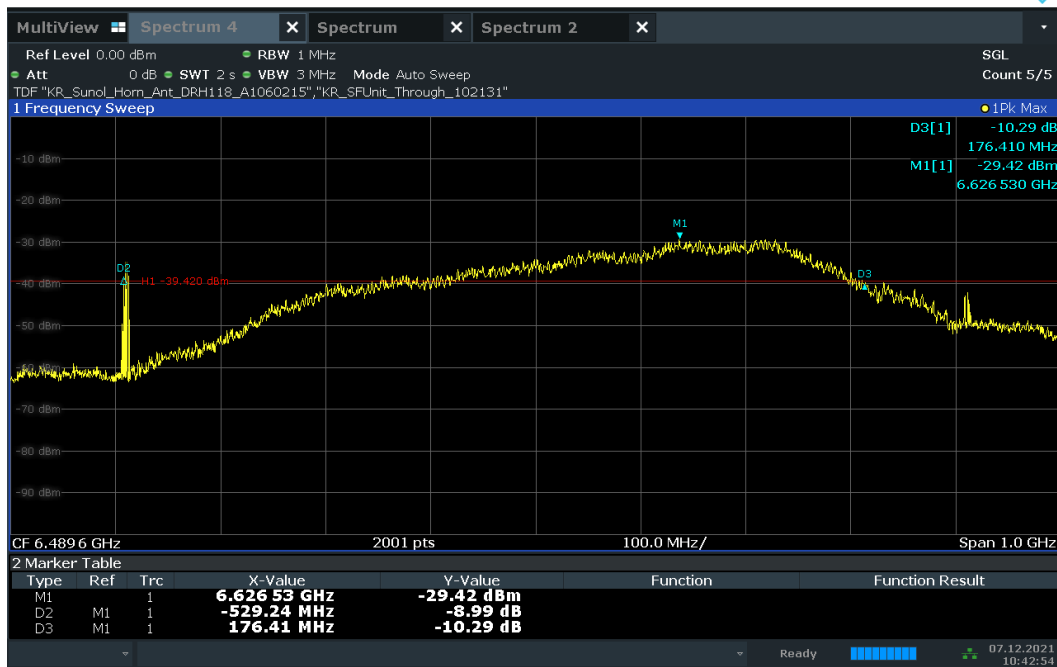


Plot 7-8. 10dBc Bandwidth – CH.5 – SP1 – Preamble 11

FCC ID: A3LSMS906U	 Proud to be part of 	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 16 of 39

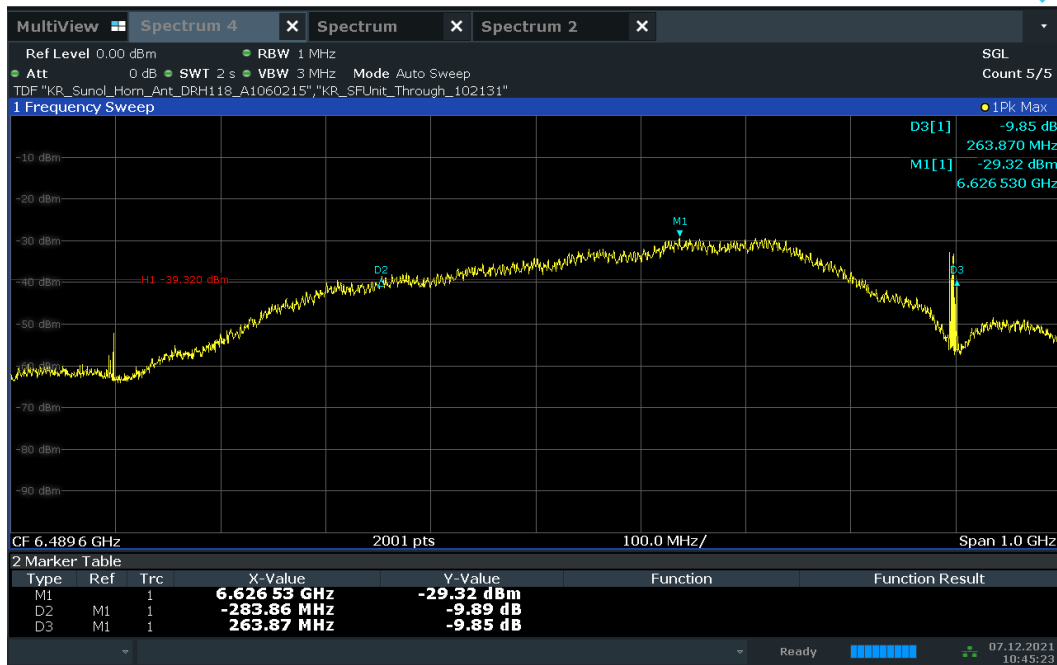


Plot 7-9. 10dBc Bandwidth – CH.5 – SP3 – Preamble 11

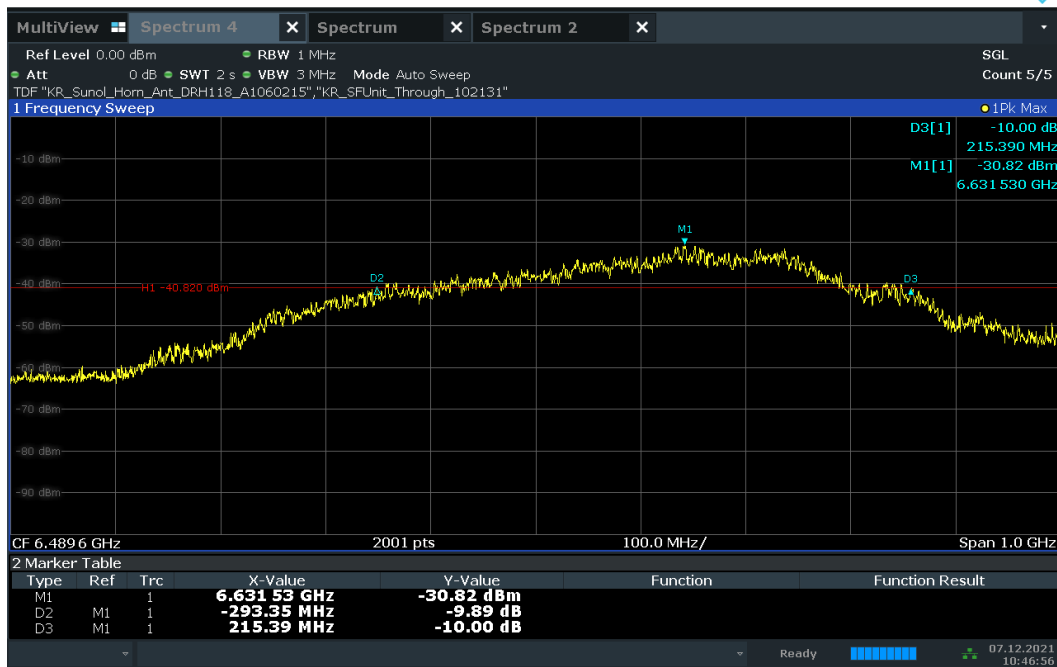


Plot 7-10. 10dBc Bandwidth – CH.5 - SP0 – Preamble 12

FCC ID: A3LSMS906U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 17 of 39

V 9.0 02/01/2019

© 2022 PCTEST
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any form, part or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

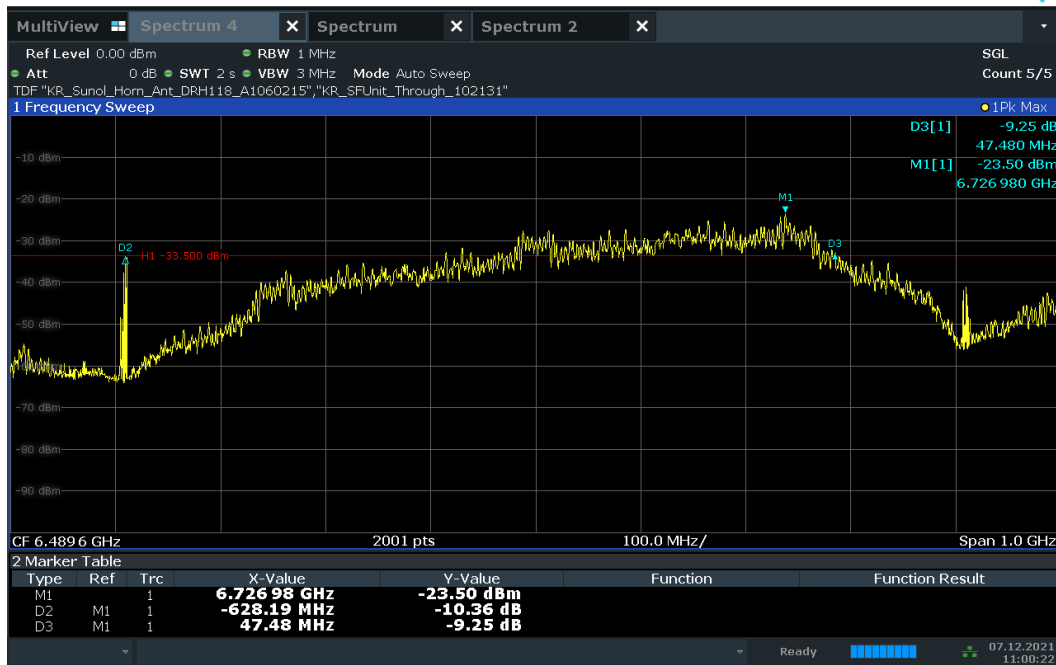


Plot 7-13. 10dBc Bandwidth – CH.5 - SP0 – Preamble 27



Plot 7-14. 10dBc Bandwidth – CH.5 – SP1 – Preamble 27

FCC ID: A3LSMS906U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 19 of 39

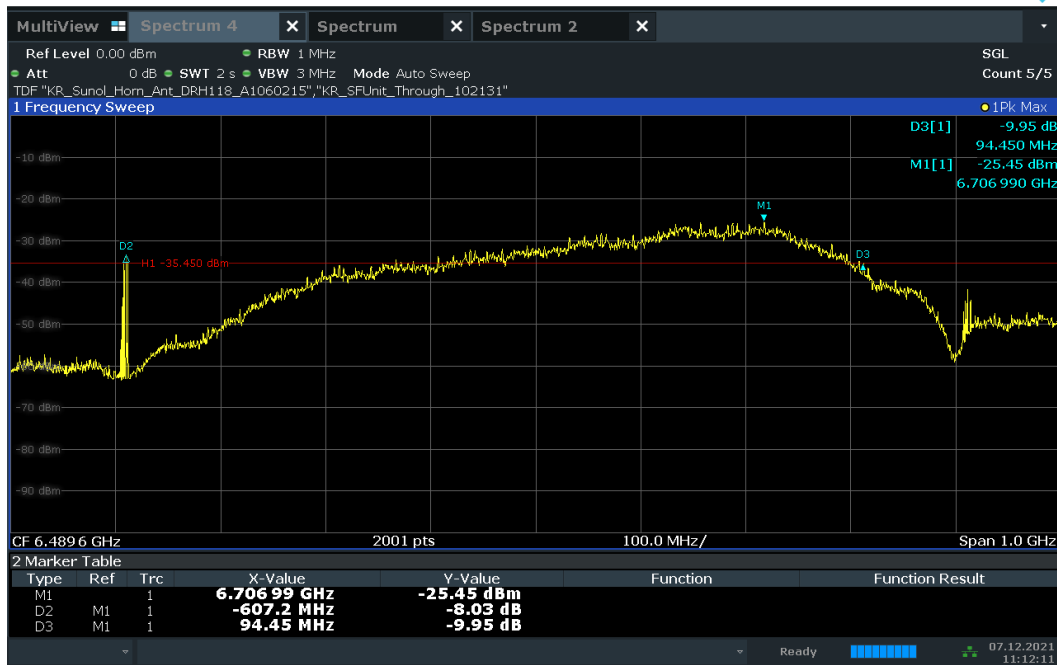

Plot 7-15. 10dBc Bandwidth – CH.5 – SP3 – Preamble 27

FCC ID: A3LSMS906U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 20 of 39

7.3 Peak Power and Maximum Average Emissions

§15.519(e), §15.519(c)

Test Overview and Limit

15.519 (3)(e) There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, fM. That limit is 0 dBm EIRP.

15.519 (3)(c) The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency in MHz	EIRP in dBm
3100 - 10600	-41.3

Table 7-3. Average EIRP Limit

Test Procedures Used

ANSI C63.10-2013

Test Settings

Peak:

1. Analyzer frequency set to the frequency of the radiated spurious emission of interest
2. RBW = 50MHz, VBW = 80MHz
3. Detector = Peak
4. Sweep time = auto coupled
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average:

1. Analyzer frequency set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz, VBW = 3MHz
3. Detector = Average (RMS)
4. Sweep time = No more than 1ms integration period over each measurement bin
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMS906U	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 21 of 39

Test Note

All combinations of HPRF/BPRF, power mode, and preamble are investigated for average and peak EIRP measurements. Only the worst case combinations are reported for each channel and each antenna.

RESULTS – BPRF

ANT	CH	MODE	Preamble	Meas. Ant.	FM[GHz]	Peak Power (dBm/50MHz)	Peak Limit (dBm/50MHz)	Margin [dB]
1	5	SP0	9	V	6.7335	-3.41	0	-3.41

Table 7-4. BPRF Highest Peak Power Results

ANT	CH	MODE	Preamble	Meas. Ant.	FM[GHz]	Average Power (dBm)	Average Limit (dBm)	Margin [dB]
1	5	SP3	9	V	6.6320	-43.07	-41.3	-1.77


Table 7-5. BPRF Highest Average Power Results

Sample Calculation:


The raw radiated spurious level is converted to field strength in dBuV/m. Then, the EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

FCC ID: A3LSMS906U	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 22 of 39

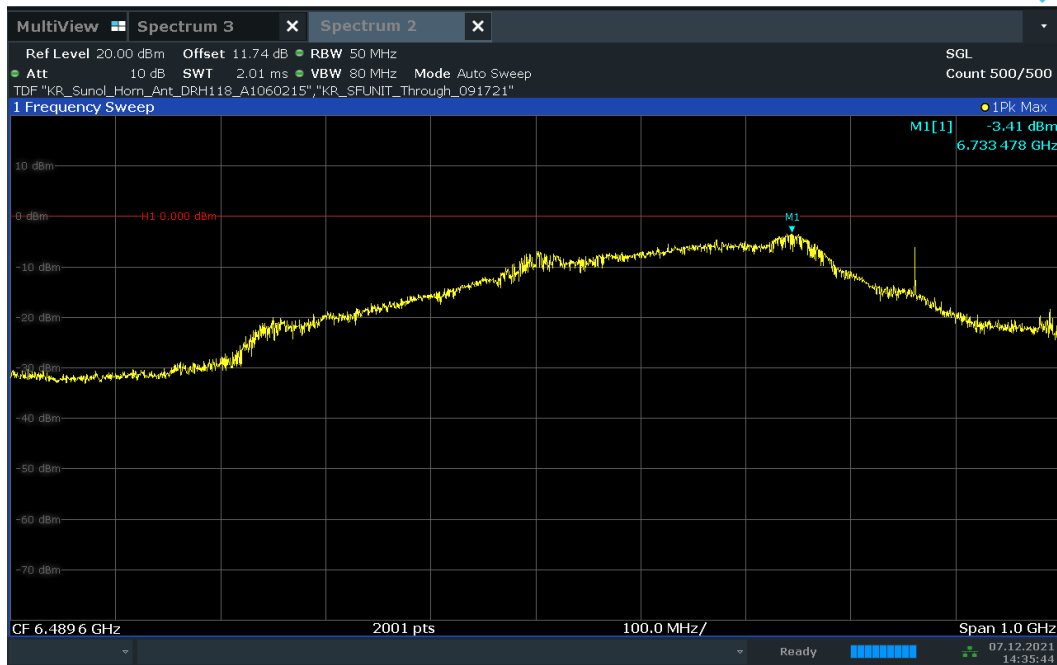

Plot 7-16. UWB Peak Power Measurement - ANT 1 - CH.5 – BPRF

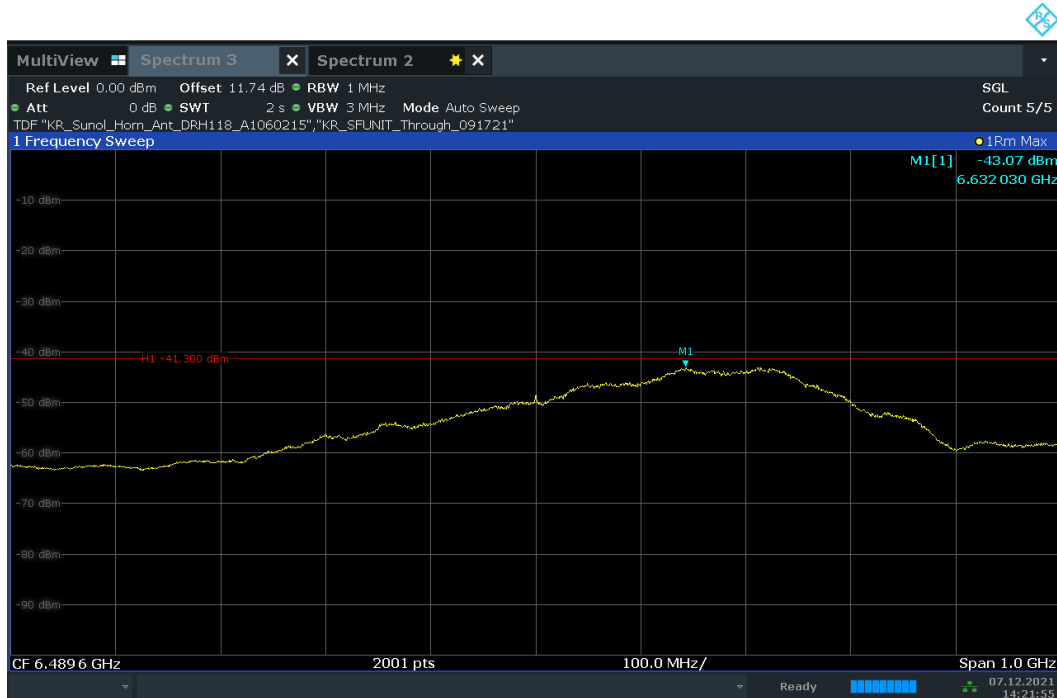

Plot 7-17. UWB Average Power Measurement - ANT 1 - CH.5 – BPRF

FCC ID: A3LSMS906U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 23 of 39

RESULTS – HPRF

ANT	CH	MODE	Preamble	Meas. Ant.	FM[GHz]	Peak Power (dBm/50MHz)	Peak Limit (dBm/50MHz)	Margin [dB]
1	5	SP0	27	V	6.6210	-7.57	0	-7.57

Table 7-6. HPRF Highest Peak Power Results

ANT	CH	MODE	Preamble	Meas. Ant.	FM[GHz]	Average Power (dBm)	Average Limit (dBm)	Margin [dB]
1	5	SP3	27	V	6.7035	-42.96	-41.3	-1.66


Table 7-7. HPRF Highest Average Power Results

Sample Calculation


The raw radiated spurious level is converted to field strength in dBuV/m. Then, the EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

FCC ID: A3LSMS906U	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 24 of 39

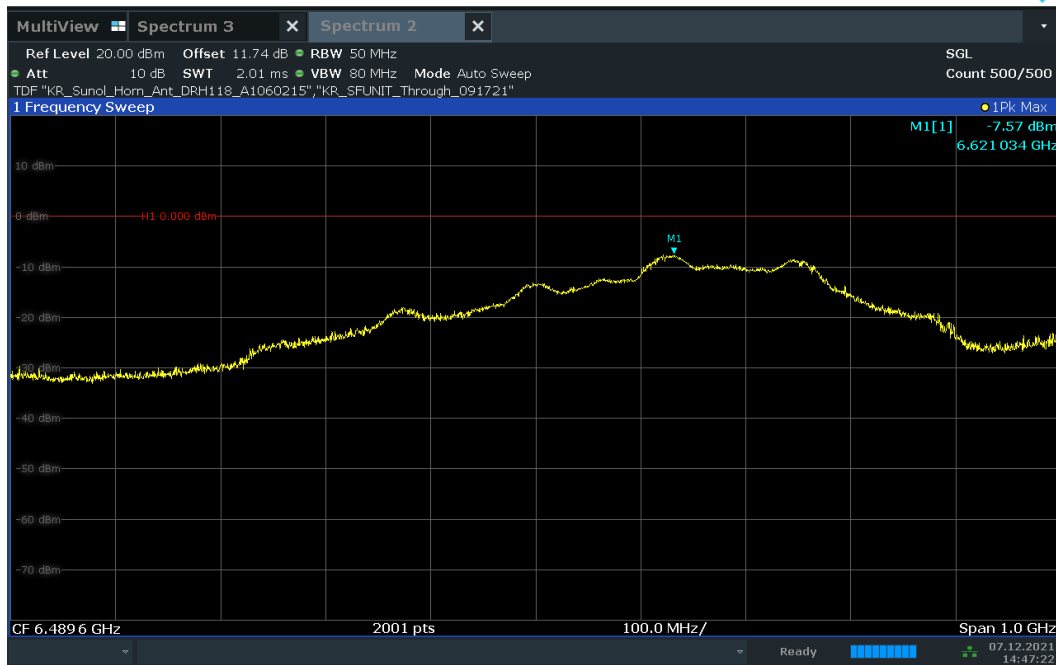

Plot 7-18. UWB Peak Power Measurement - ANT 1 - CH.5 – HPRF

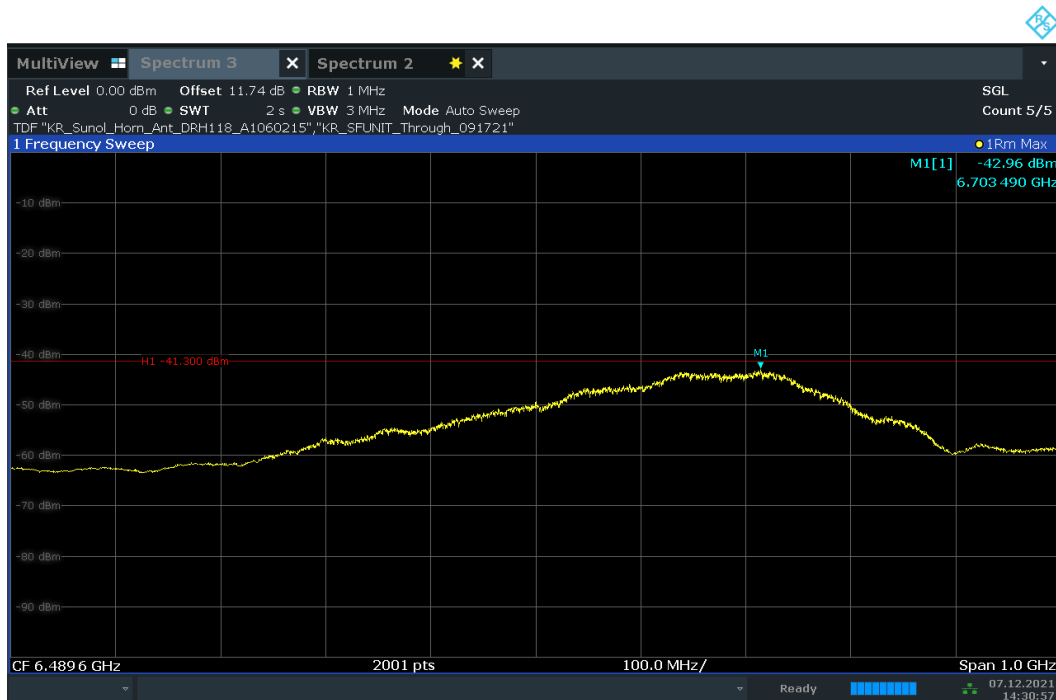

Plot 7-19. UWB Average Power Measurement - ANT 1 - CH.5 – HPRF

FCC ID: A3LSMS906U	 Proud to be part of 	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 25 of 39

7.4 Radiated Measurement Data above 960MHz

§15.519 (c), §15.519(d), §15.209(a)

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

§15.519(c)

Frequency in MHz	EIRP in dBm
960-1610	-75.3
1610-1990	-63.3
1990-3100	-61.3
3100-10600	-41.3
Above 10600	-61.3

Table 7-8. Above 960MHz Average Limits

§15.519(d)

Frequency in MHz	EIRP in dBm
1164-1240	-85.3
1559-1610	-85.3

Table 7-9. Above 960MHz Average Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Average EIRP Measurements

1. Analyzer frequency set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz (30kHz for emissions in the GPS bands)
3. VBW = 3MHz (100kHz for the emissions in the GPS bands)
4. Detector = RMS
5. Sweep time = No more than 1ms integration period over each measurement bin
6. Trace mode = Max hold
7. Trace was allowed to stabilize

FCC ID: A3LSMS906U	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 26 of 39

Test Setup

The EUT and measurement equipment were set up as shown test setup photos provided.

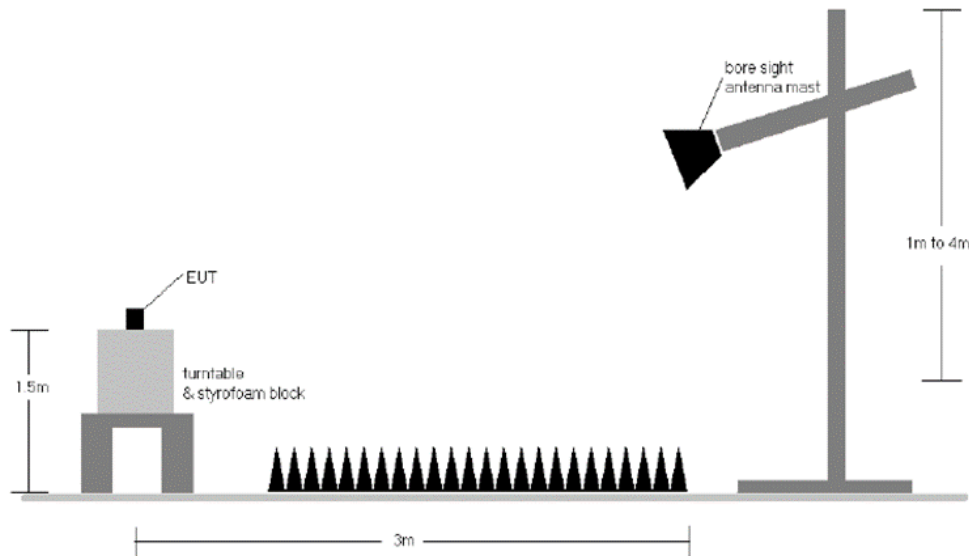


Figure 7-2. Radiated Test Setup > 1GHz

Test Notes

1. All modes of operation and settings (Preamble, Packet Type, etc) were investigated and the worst-case emissions are reported.
2. The RBW for measurements in the GPS Bands were reduced to 30kHz in order to prove compliance.
3. 1000 ~ 18000 MHz and above 18000 MHz pre-scan plots were conducted at 0.7 and 0.6 meter respectively. The plots are only for the purpose of spurious emission identification.
4. All final measurements were made at 0.7 meters.
5. All readings are calibrated by a signal generator with accuracy traceable to the National Institute of Standards and Technology (NIST).
6. $AFCL \text{ (dB/m)} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)}$


Sample Calculation

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the EIRP RSE level is calculated by applying the additional factors shown below for a test distance of 3 meter


$$RSE \text{ EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + AFCL \text{ (dB/m)} + 20\text{Log(Dm)} - 104.8$$

FCC ID: A3LSMS906U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 27 of 39

Channel 5 ANTENNA 1:

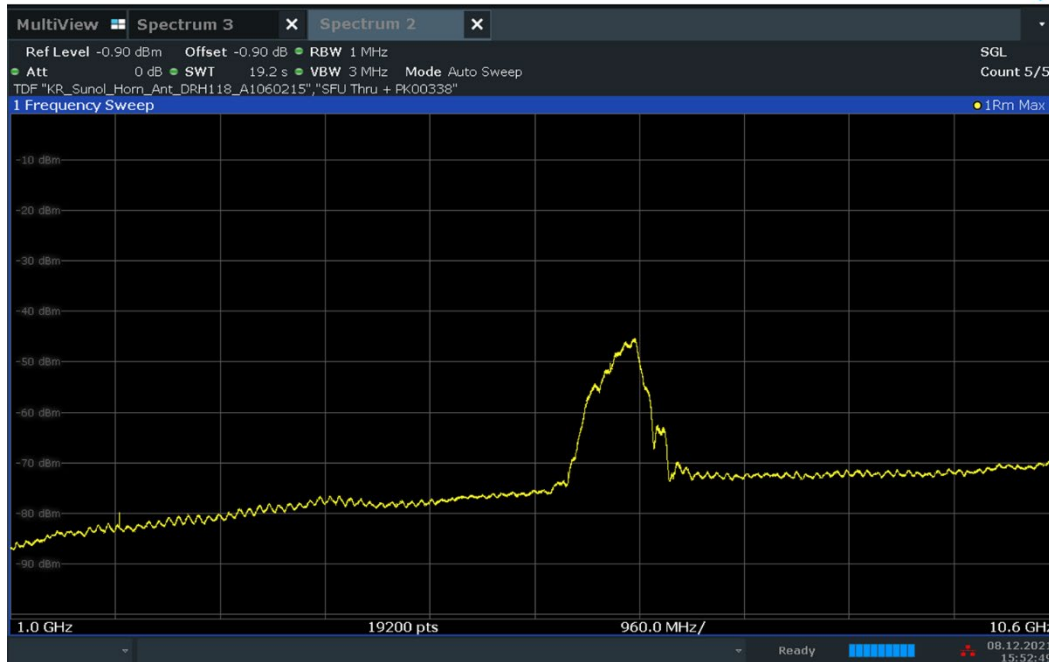


Plot 7-20. Radiated Spurious Pre-Scan 1000 - 10600 MHz - CH.5 - ANT 1

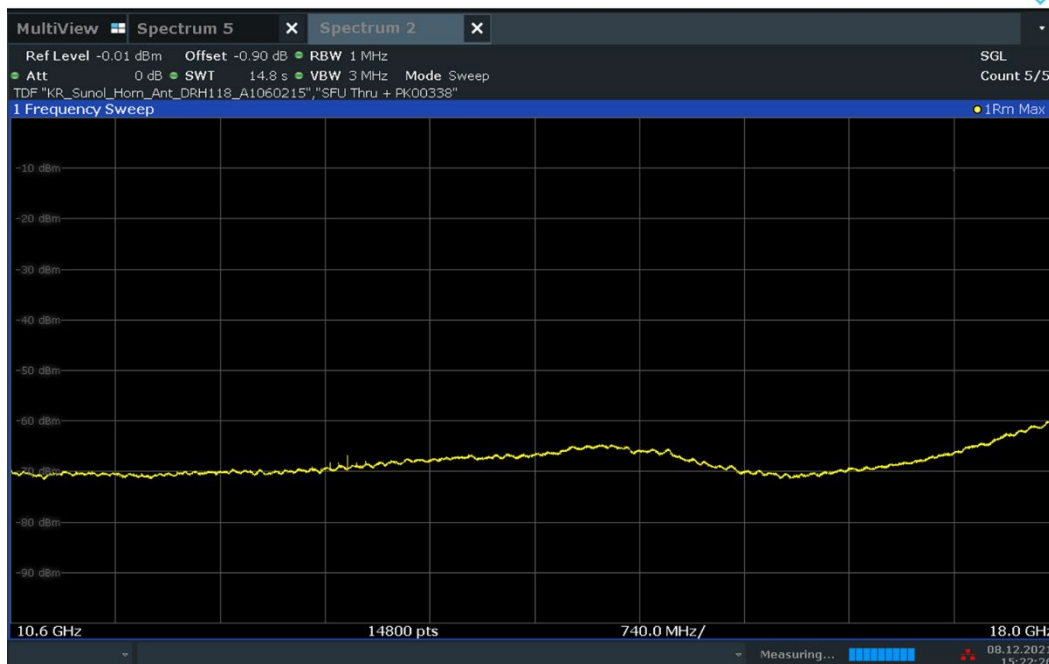


Plot 7-21. Radiated Spurious Pre-Scan 10600 - 18000 MHz - CH.5 - ANT 1

FCC ID: A3LSMS906U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 28 of 39

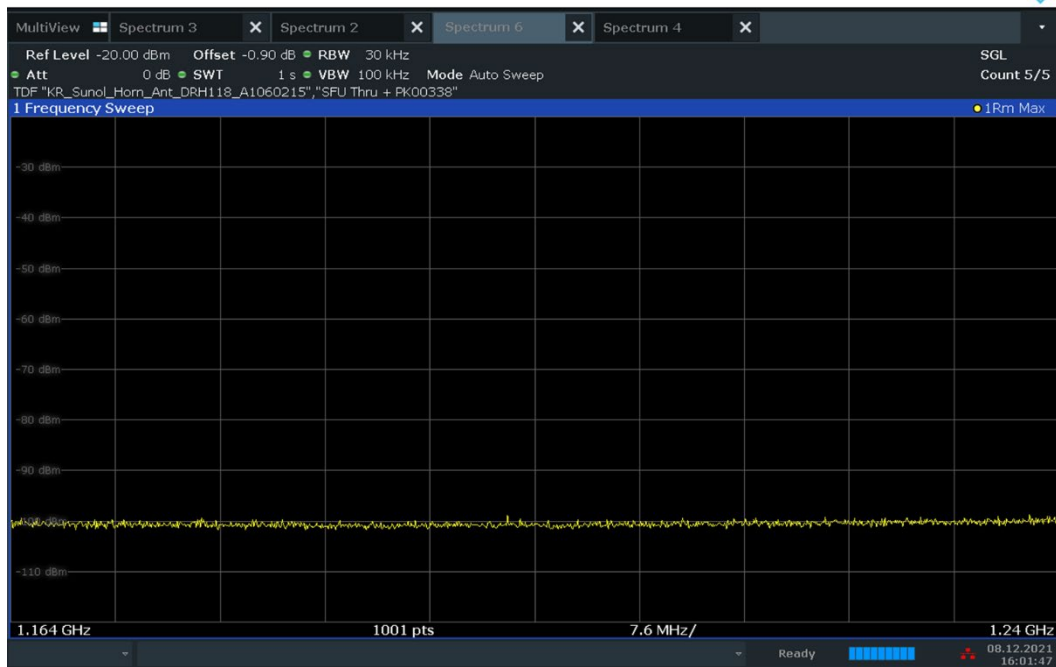


Plot 7-22. Radiated Spurious Pre-Scan 1164 - 1240 MHz - CH.5 - ANT 1 – GPS band

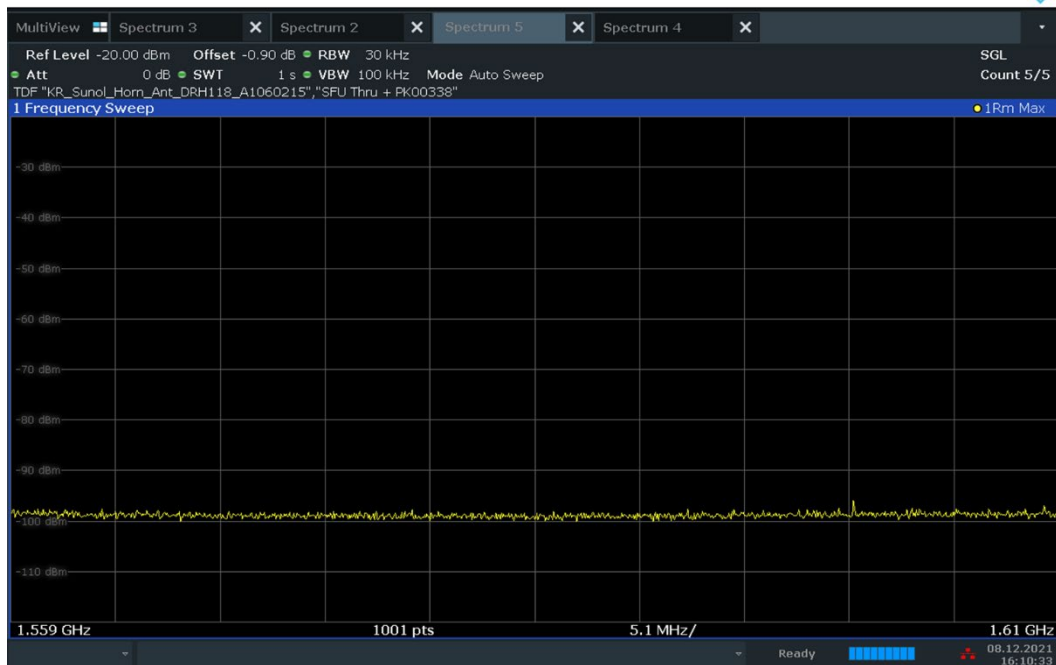

Plot 7-23. Radiated Spurious Pre-Scan 1559 - 1610 MHz - CH.5 - ANT 1 – GPS band

FCC ID: A3LSMS906U	 Proud to be part of 		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) 	Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset	Page 29 of 39	

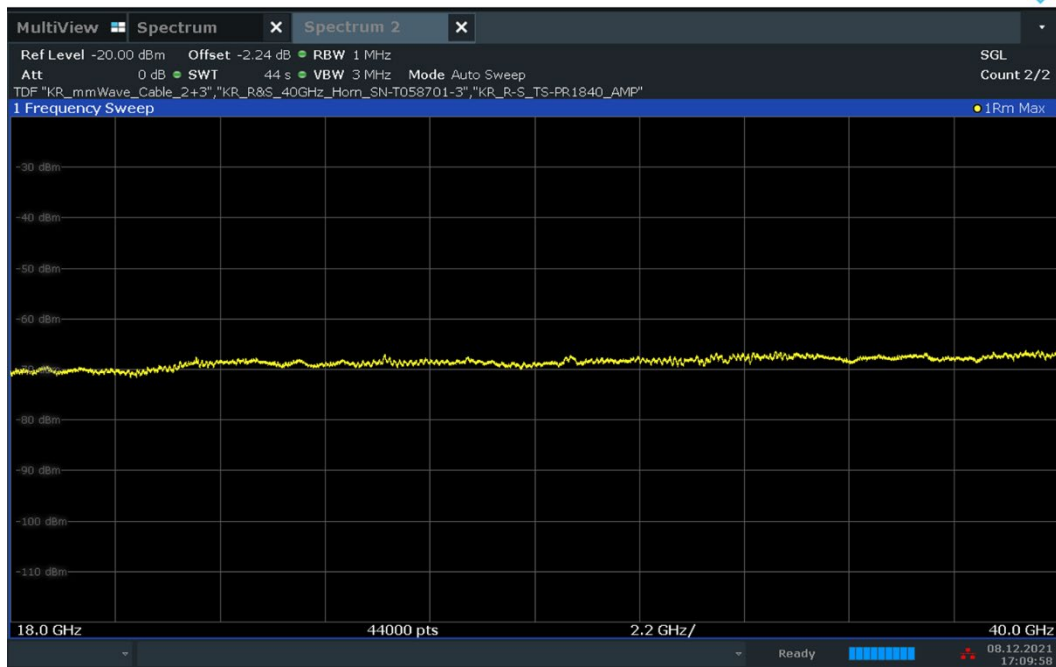

Plot 7-24. Radiated Spurious Pre-Scan 18 – 40 GHz - CH.5 - ANT 1

Channel:	5
Frequency (MHz):	6489.6
Preamble ID	9
Config	SP3

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Dist. Corr. Factor [dB]	Spurious Emission Level[dBm]	Limit [dBm]	Margin [dB]
1547	RMS	V	-	-	-73.25	-9.28	-12.64	-83.43	-75.30	-8.13
1896	RMS	V	8	280	-72.94	-8.12	-12.64	-81.97	-63.30	-18.67
4006	RMS	V	-	-	-73.28	-2.35	-12.64	-76.52	-41.30	-35.22
10517	RMS	V	-	-	-75.98	7.32	-12.64	-69.55	-41.30	-28.25
12979	RMS	H	211	83	-74.61	8.67	-12.64	-66.84	-61.30	-5.54
14775	RMS	H	-	-	-76.19	12.37	-12.64	-64.72	-61.30	-3.42

Table 7-10. Radiated Spurious Emissions CH. 5 – ANT1

Channel:	5
Frequency (MHz):	6489.6
Preamble ID	9
Config	SP3

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Dist. Corr. Factor [dB]	Spurious Emission Level[dBm]	Limit [dBm]	Margin [dB]
1200	RMS	V	-	-	-86.39	-11.59	-12.64	-98.87	-85.30	-13.57
1237	RMS	V	-	-	-86.50	-11.40	-12.64	-98.80	-85.30	-13.50
1223	RMS	V	-	-	-86.84	-11.47	-12.64	-99.21	-85.30	-13.91
1563	RMS	V	-	-	-87.65	-9.06	-12.64	-97.60	-85.30	-12.30
1600	RMS	V	-	-	-85.73	-9.39	-12.64	-96.01	-85.30	-10.71
1609	RMS	V	-	-	-86.38	-9.75	-12.64	-97.02	-85.30	-11.72

Table 7-11. Radiated Spurious Emissions CH. 5 – ANT1 – GPS BANDS

FCC ID: A3LSMS906U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 30 of 39

7.5 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209(a), §15.519(c); RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-12 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-12. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMS906U	 Proud to be part of 	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 31 of 39

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

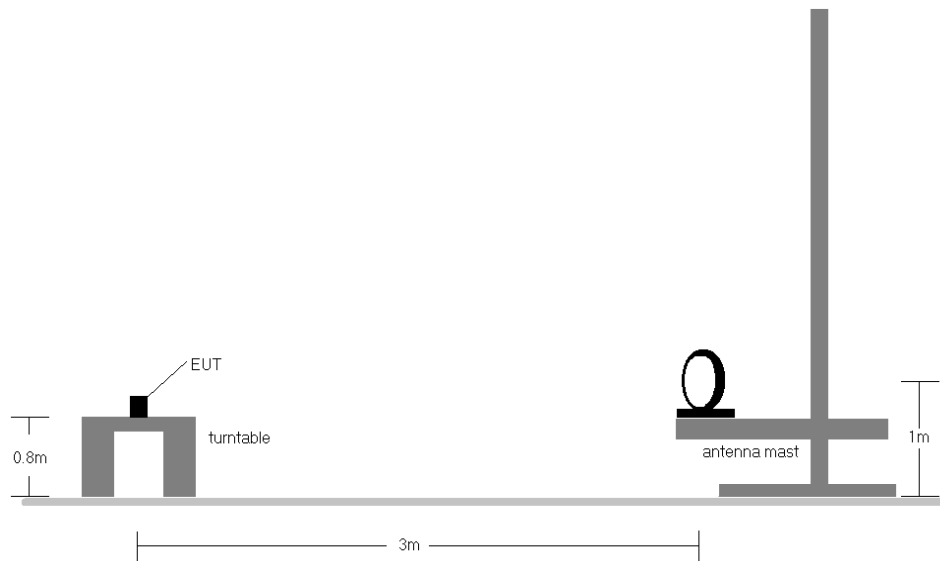


Figure 7-3. Radiated Test Setup < 30Mhz

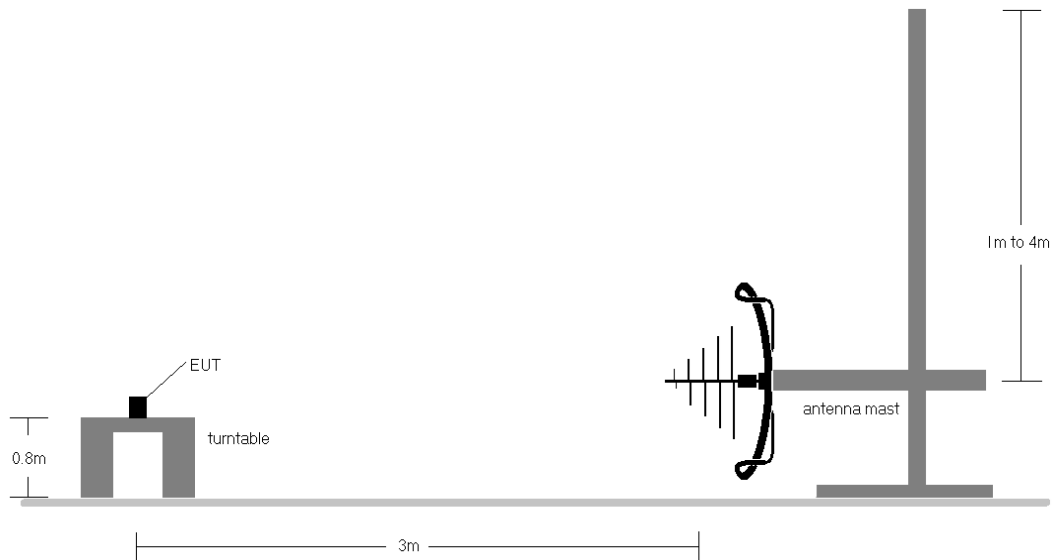



Figure 7-4. Radiated Test Setup < 1GHz

FCC ID: A3LSMS906U	 Proud to be part of 	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 32 of 39

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen(8.10) are below the limit shown in Table 7-12.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
4. Emissions were measured at a 3 meter test distance.
5. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
6. No spurious emissions were detected within 20dB of the limit below 30MHz.
7. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
8. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

FCC ID: A3LSMS906U	 Proud to be part of 	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 33 of 39

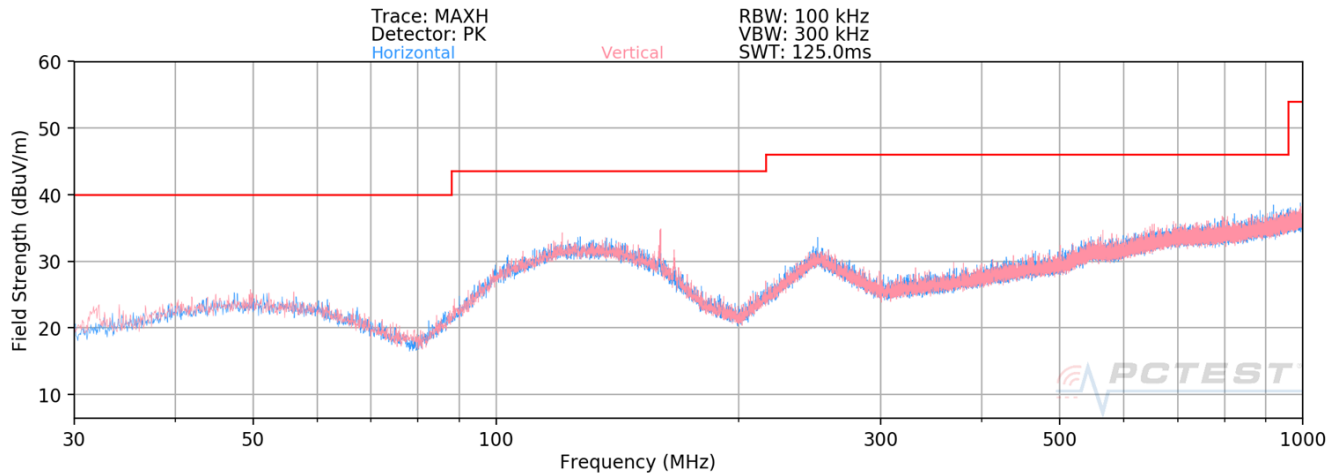

Plot 7-25. 30MHz - 1 GHz Pre-Scan Plots ANT1 – CH 5

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
160.03	Quasi-Peak	V	316	54	-96.85	20.04	30.19	43.52	-13.33
166.66	Quasi-Peak	V	316	82	-98.41	18.15	26.74	43.52	-16.78
285.00	Quasi-Peak	H	138	21	-101.25	17.47	23.22	46.02	-22.80

Table 7-13. Radiated Measurements Below 1GHz

FCC ID: A3LSMS906U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 34 of 39

7.6 Line Conducted Measurement Data

§15.207

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All emissions must not exceed the limits shown in Table 7-13 per FCC 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-14. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.4-2014

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMS906U		MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 35 of 39

Test Setup

The EUT and measurement equipment were set up as shown in the test setup photos provided.


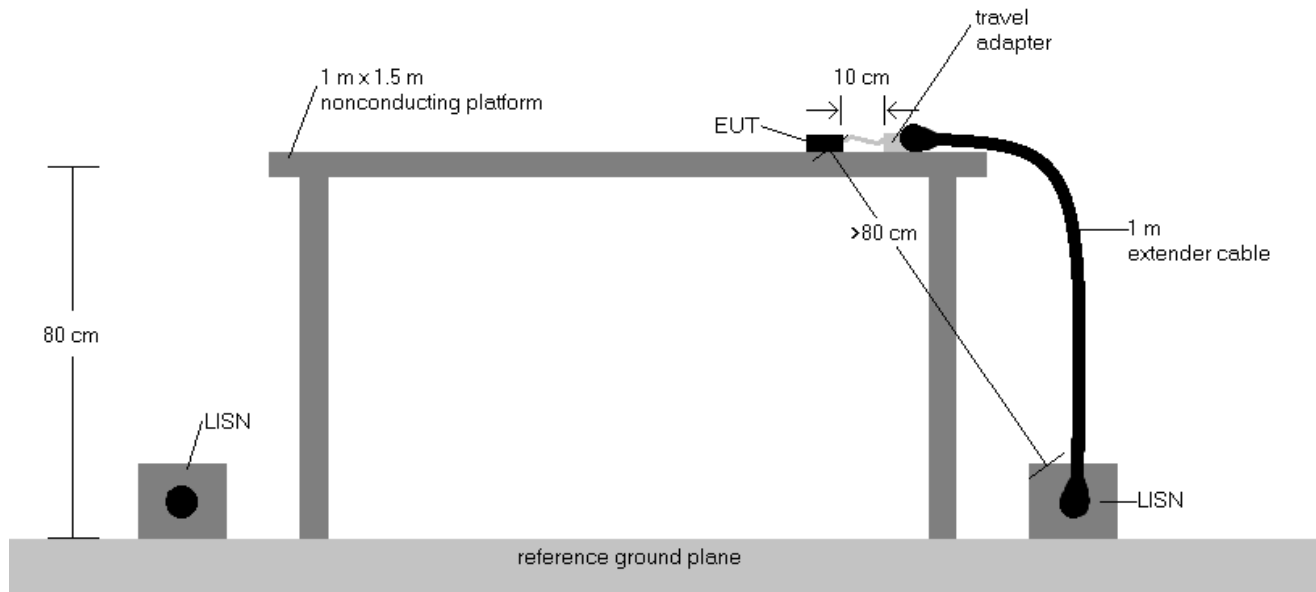


Figure 7-5. Test Instrument & Measurement Setup

Test Notes

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 and RSS-Gen.
3. L1 = Phase; N = Neutral
4. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Reading (dB}\mu\text{V)} + \text{Factor (dB)}$
6. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.

FCC ID: A3LSMS906U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 36 of 39

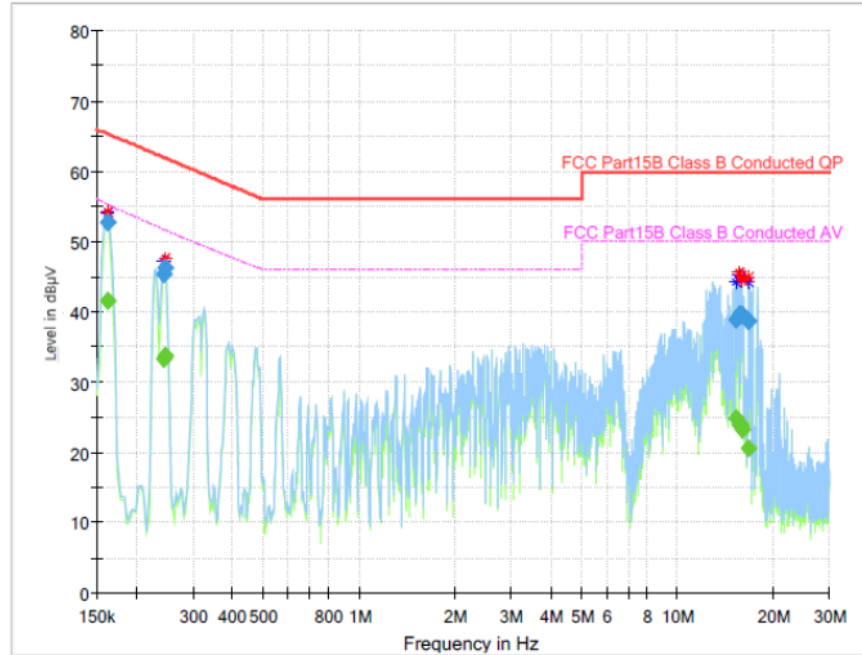


Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.161940	---	41.59	55.30	13.72	1000.0	9.000	L1	9.6
0.161940	52.65	---	65.36	12.71	1000.0	9.000	L1	9.6
0.242535	---	33.20	51.77	18.57	1000.0	9.000	L1	9.6
0.242535	45.26	---	62.01	16.74	1000.0	9.000	L1	9.6
0.245520	---	33.79	51.67	17.88	1000.0	9.000	L1	9.6
0.245520	46.35	---	61.91	15.56	1000.0	9.000	L1	9.6
15.212310	---	24.77	50.00	25.23	1000.0	9.000	L1	10.0
15.212310	38.80	---	60.00	21.20	1000.0	9.000	L1	10.0
15.698865	---	24.02	50.00	25.98	1000.0	9.000	L1	10.0
15.698865	39.55	---	60.00	20.45	1000.0	9.000	L1	10.0
15.794385	---	23.80	50.00	26.20	1000.0	9.000	L1	10.0
15.794385	39.55	---	60.00	20.45	1000.0	9.000	L1	10.0
15.943635	---	23.19	50.00	26.81	1000.0	9.000	L1	10.0
15.943635	39.60	---	60.00	20.40	1000.0	9.000	L1	10.0
16.737645	---	20.50	50.00	29.50	1000.0	9.000	L1	10.0
16.737645	38.77	---	60.00	21.23	1000.0	9.000	L1	10.0

Plot 7-26. Line Conducted Plot (L1) ANT 1 – CH 5

FCC ID: A3LSMS906U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 37 of 39

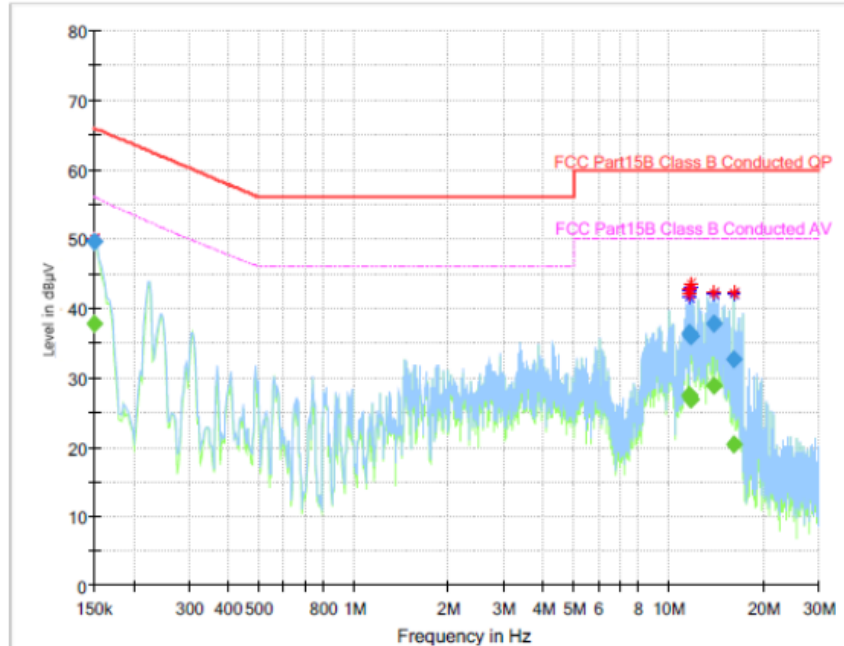

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.150000	---	37.87	56.00	18.13	1000.0	9.000	N	9.7
0.150000	49.60	---	66.00	16.40	1000.0	9.000	N	9.7
11.630310	---	27.57	50.00	22.43	1000.0	9.000	N	10.0
11.630310	36.41	---	60.00	23.59	1000.0	9.000	N	10.0
11.722845	---	27.23	50.00	22.77	1000.0	9.000	N	10.0
11.722845	36.09	---	60.00	23.91	1000.0	9.000	N	10.0
11.827320	---	26.93	50.00	23.07	1000.0	9.000	N	10.0
11.827320	36.06	---	60.00	23.94	1000.0	9.000	N	10.0
13.907865	---	28.91	50.00	21.09	1000.0	9.000	N	10.1
13.907865	37.81	---	60.00	22.19	1000.0	9.000	N	10.1
16.191390	---	20.38	50.00	29.62	1000.0	9.000	N	10.1
16.191390	32.54	---	60.00	27.46	1000.0	9.000	N	10.1

Plot 7-27. Line Conducted Plot (N) ANT 1 – CH 5

FCC ID: A3LSMS906U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 38 of 39

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMS906U** has been tested to comply with the requirements specified in §15.519 and §15.521 of the FCC rules.

FCC ID: A3LSMS906U	 Proud to be part of  element	MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112030140-01.A3L	Test Dates: 12/7 – 12/9/2021	EUT Type: Portable Handset		Page 39 of 39