



ELEMENT WASHINGTON DC LLC

13, Heungdeok 1-ro, Giheung-gu, Yongin-si,
Gyeonggi-do, 16954 South Korea
Tel. 031.660.7319 / Fax 031.660.7318
<http://www.element.com>

PART 22 & 90 MEASUREMENT REPORT

Applicant Name:

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

9/11/2023 - 10/11/2023

Test Report Issue Date:

10/26/2023

Test Site/Location:

Element Lab., Gyeonggi-do, South Korea

Test Report Serial No.:

1M2308210092-07.A3L

FCC ID:

A3LSMS928U

APPLICANT:

Samsung Electronics Co., Ltd.

Application Type:

Certification

Model:

SM-S928U

Additional Model(s):

SM-S928U1

EUT Type:

Portable Handset

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part:

§22(H), §90(S), §90(R)

Test Procedure(s):

ANSI C63.26-2015, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Prepared by

Reviewed by

FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 1 of 96

© 2023 ELEMENT

V11.0 9/14/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

T A B L E O F C O N T E N T S

1.0	INTRODUCTION	5
1.1	Scope	5
1.2	Element Test Location.....	5
1.3	Test Facility / Accreditations.....	5
2.0	PRODUCT INFORMATION.....	6
2.1	Equipment Description	6
2.2	Device Capabilities.....	6
2.3	Test Configuration	6
2.4	Software and Firmware	6
2.5	EMI Suppression Device(s)/Modifications	6
3.0	DESCRIPTION OF TESTS	7
3.1	Evaluation Procedure	7
3.2	Radiated Power and Radiated Spurious Emissions	7
4.0	MEASUREMENT UNCERTAINTY	8
5.0	TEST EQUIPMENT CALIBRATION DATA	9
6.0	SAMPLE CALCULATIONS	10
7.0	TEST RESULTS	11
7.1	Summary.....	11
7.2	Conducted Output Power Data	13
7.3	Occupied Bandwidth	17
7.4	Spurious and Harmonic Emissions at Antenna Terminal	46
7.5	Band Edge Emissions at Antenna Terminal	61
7.6	Radiated Power (ERP).....	73
7.7	Radiated Spurious Emissions Measurements	77
7.8	Frequency Stability / Temperature Variation	92
8.0	CONCLUSION.....	96

FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 2 of 96

MEASUREMENT REPORT

FCC Part 22 & 90

Antenna-A							
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	Measurement	Max. Power [W]	Max. Power [dBm]	Emission Designator
LTE Band 14	10 MHz	QPSK	793.0	ERP	0.132	21.21	9M08G7D
		16QAM	793.0	ERP	0.107	20.29	9M01W7D
	5 MHz	QPSK	790.5 - 795.5	ERP	0.131	21.18	4M54G7D
		16QAM	790.5 - 795.5	ERP	0.102	20.09	4M52W7D
LTE Band 26	15 MHz	QPSK	821.5	ERP	0.277	24.42	13M5G7D
		16QAM	821.5	ERP	0.219	23.41	13M5W7D
	15 MHz	QPSK	821.5	Conducted	0.253	24.02	13M5G7D
		16QAM	821.5	Conducted	0.201	23.03	13M5W7D
	10 MHz	QPSK	819.0	Conducted	0.259	24.14	9M01G7D
		16QAM	819.0	Conducted	0.215	23.32	9M02W7D
	5 MHz	QPSK	816.5 - 821.5	Conducted	0.255	24.07	4M54G7D
		16QAM	816.5 - 821.5	Conducted	0.205	23.12	4M52W7D
	3 MHz	QPSK	815.5 - 822.5	Conducted	0.261	24.16	2M71G7D
		16QAM	815.5 - 822.5	Conducted	0.208	23.18	2M71W7D
	1.4 MHz	QPSK	814.7 - 823.3	Conducted	0.250	23.98	1M10G7D
		16QAM	814.7 - 823.3	Conducted	0.202	23.06	1M09W7D
NR Band n26	20 MHz	$\pi/2$ BPSK	824.0	ERP	0.121	20.82	17M9G7D
		QPSK	824.0	ERP	0.119	20.76	19M0G7D
		16QAM	824.0	ERP	0.095	19.78	19M0W7D
	15 MHz	$\pi/2$ BPSK	821.5	ERP	0.120	20.79	13M5G7D
		QPSK	821.5	ERP	0.118	20.73	14M2G7D
		16QAM	821.5	ERP	0.094	19.75	14M2W7D
	20 MHz	$\pi/2$ BPSK	824.0	Conducted	0.255	24.07	17M9G7D
		QPSK	824.0	Conducted	0.254	24.05	19M0G7D
		16QAM	824.0	Conducted	0.183	22.62	19M0W7D
	15 MHz	$\pi/2$ BPSK	821.5	Conducted	0.267	24.26	13M5G7D
		QPSK	821.5	Conducted	0.253	24.03	14M2G7D
		16QAM	821.5	Conducted	0.199	22.99	14M2W7D
	10 MHz	$\pi/2$ BPSK	819.0	Conducted	0.259	24.13	9M00G7D
		QPSK	819.0	Conducted	0.252	24.01	9M38G7D
		16QAM	819.0	Conducted	0.203	23.08	9M39W7D
	5 MHz	$\pi/2$ BPSK	816.5 - 821.5	Conducted	0.270	24.31	4M51G7D
		QPSK	816.5 - 821.5	Conducted	0.266	24.25	4M52G7D
		16QAM	816.5 - 821.5	Conducted	0.191	22.80	4M52W7D

FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 3 of 96

Antenna-E							
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	Measurement	Max. Power [W]	Max. Power [dBm]	Emission Designator
LTE Band 14	10 MHz	QPSK	793.0	ERP	0.069	18.37	9M02G7D
		16QAM	793.0	ERP	0.055	17.41	9M03W7D
	5 MHz	QPSK	790.5 - 795.5	ERP	0.069	18.36	4M53G7D
		16QAM	790.5 - 795.5	ERP	0.056	17.46	4M54W7D
LTE Band 26	15 MHz	QPSK	821.5	ERP	0.094	19.75	13M5G7D
		16QAM	821.5	ERP	0.074	18.67	13M5W7D
	15 MHz	QPSK	821.5	Conducted	0.230	23.62	13M5G7D
		16QAM	821.5	Conducted	0.187	22.71	13M5W7D
	10 MHz	QPSK	819.0	Conducted	0.226	23.55	9M01G7D
		16QAM	819.0	Conducted	0.184	22.64	8M99W7D
	5 MHz	QPSK	816.5 - 821.5	Conducted	0.231	23.64	4M51G7D
		16QAM	816.5 - 821.5	Conducted	0.191	22.81	4M51W7D
	3 MHz	QPSK	815.5 - 822.5	Conducted	0.231	23.63	2M71G7D
		16QAM	815.5 - 822.5	Conducted	0.182	22.60	2M71W7D
	1.4 MHz	QPSK	814.7 - 823.3	Conducted	0.226	23.54	1M10G7D
		16QAM	814.7 - 823.3	Conducted	0.183	22.63	1M10W7D
NR Band n26	20 MHz	$\pi/2$ BPSK	824.0	ERP	0.102	20.10	18M0G7D
		QPSK	824.0	ERP	0.100	20.01	19M0G7D
		16QAM	824.0	ERP	0.079	18.95	19M0W7D
	15 MHz	$\pi/2$ BPSK	821.5	ERP	0.101	20.04	13M5G7D
		QPSK	821.5	ERP	0.096	19.82	14M2G7D
		16QAM	821.5	ERP	0.080	19.02	14M2W7D
	20 MHz	$\pi/2$ BPSK	824.0	Conducted	0.211	23.25	18M0G7D
		QPSK	824.0	Conducted	0.213	23.29	19M0G7D
		16QAM	824.0	Conducted	0.176	22.46	19M0W7D
	15 MHz	$\pi/2$ BPSK	821.5	Conducted	0.208	23.19	13M5G7D
		QPSK	821.5	Conducted	0.204	23.10	14M2G7D
		16QAM	821.5	Conducted	0.179	22.53	14M2W7D
	10 MHz	$\pi/2$ BPSK	819.0	Conducted	0.208	23.19	8M97G7D
		QPSK	819.0	Conducted	0.208	23.18	9M36G7D
		16QAM	819.0	Conducted	0.181	22.58	9M37W7D
	5 MHz	$\pi/2$ BPSK	816.5 - 821.5	Conducted	0.209	23.20	4M51G7D
		QPSK	816.5 - 821.5	Conducted	0.209	23.21	4M52G7D
		16QAM	816.5 - 821.5	Conducted	0.184	22.65	4M51W7D

EUT Overview

FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 4 of 96

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

These measurement tests were conducted at the Element Suwon Laboratory located at 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do, 16954, South Korea. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology Suwon, Ltd. located in Yongin-si, Gyeonggi-do, 16954, South Korea.

- Element Materials Technology Suwon, Ltd. is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation(A2LA) with Certificate number 2041.04 for Specific Absorption Rate (SAR), and Electromagnetic Compatibility (EMC) & Telecommunications testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Materials Technology Suwon, Ltd. facility is accredited, designated, and recognized in accordance with the provision of Radio Wave Act and International Standard ISO/IEC 17025:2017 under the National Radio Research Agency.
 - Designation Number / CABID: KR0169
 - Test Firm Registration Number of FCC: 417945
 - Test Firm Registration Number of ISRD: 26168

FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 5 of 96

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMS928U**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 90 and 22H.

Test Device Serial No.: 0091M, 0117M, 0248M, 0417M, 1253M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR (FR1 and FR2), 802.11b/g/n/ax/be WLAN, 802.11a/n/ac/ax/be UNII (5GHz and 6GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer, UWB

2.3 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.4 Software and Firmware

Testing was performed on device(s) using software/firmware version S928USQU0AWIA installed on the EUT.

2.5 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 6 of 96

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services” (ANSI C63.26-2015) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI C63.26-2015. For emissions below 1GHz, a half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]};$$

where P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

For radiated spurious emissions measurements, the field strength conversion method is used per the formulas in Section 5.2.7 of ANSI C63.26-2015. Field Strength (EIRP) is calculated using the following formulas:

$$E_{\text{[dB}\mu\text{V/m]}} = \text{Measured amplitude level}_{\text{[dBm]}} + 107 + \text{Cable Loss}_{\text{[dB]}} + \text{Antenna Factor}_{\text{[dB/m]}}$$

And

$$\text{EIRP}_{\text{[dBm]}} = E_{\text{[dB}\mu\text{V/m]}} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015.

FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 7 of 96

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.95
Radiated Disturbance (<1GHz)	4.10
Radiated Disturbance (>1GHz)	4.82
Radiated Disturbance (>18GHz)	4.96

FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 8 of 96

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	N9030A	PXA Signal Analyzer	2023-07-04	Annual	2024-07-03	MY49432391
Anritsu	S820E	Cable and Antenna Analyzer	2023-07-05	Annual	2024-07-04	1839097
Anritsu	MA24106A	USB Power Sensor	2023-07-05	Annual	2024-07-04	1244512
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	2022-10-21	Biennial	2024-10-20	10160045
Com-Power	PAM-118A	Preamplifier	2023-07-05	Annual	2024-07-04	551042
Espec	SH-242	Environmental Chamber	2023-07-05	Annual	2024-07-04	93011064
Fairview Microwave	FM2CP1122-10	2.92mm Directional Coupler	2023-07-04	Annual	2024-07-03	1946
Keysight Technologies	N9030B	MXA Signal Analyzer	2023-07-04	Annual	2024-07-03	MY57143276
Mini-Circuits	BW-N10W5+	Attenuator	2023-07-04	Annual	2024-07-03	1607
Mini-Circuits	BW-N10W5+	Attenuator	2023-07-04	Annual	2024-07-03	1607
Rohde & Schwarz	TS-PR18	Preamplifier	2023-07-05	Annual	2024-07-04	102141
Rohde & Schwarz	SMB100A03	Signal Generator	2023-01-17	Annual	2024-01-16	182487
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	2023-02-17	Annual	2024-02-16	131453
Rohde & Schwarz	FSW43	Signal and Spectrum Analyzer	2023-01-13	Annual	2024-01-12	101955
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2023-02-17	Annual	2024-02-16	102131
Rohde & Schwarz	TC-TA18	VIVALDI-ANT	2021-10-22	Biennial	2023-10-21	101097
Rohde & Schwarz	TC-TA18	VIVALDI-ANT	2021-10-22	Biennial	2023-10-21	101098
Schwarzbeck	VULB9162	Broadband TRILOG Antenna	2023-06-01	Biennial	2025-05-31	9162-217
Schwarzbeck	UHA9105	Dipole Antenna	2022-07-19	Biennial	2024-07-18	91052522
Sunol	DRH-118	Horn Antenna	2023-01-26	Biennial	2025-01-25	A060215

Table 5-1. Test Equipment

Notes:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 9 of 96

6.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (–24.80) = 50.3 dBc.

FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 10 of 96

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMS928U
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): NR/LTE

Test Condition	Test Description	FCC Part Section(s)	RSS Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Transmitter Conducted Output Power	2.1046(a), 90.635(b)	RSS-Gen(6.12)	< 100 Watts	PASS	Section 7.2, RF Exposure Report
	Occupied Bandwidth	2.1049(h)	RSS-Gen(6.7)	N/A	PASS	Section 7.3
	Conducted Band Edge / Spurious Emissions (LTE Band 14)	2.1051, 90.543(c)(e)	RSS-Gen(6.13), RSS-140(4.4)	On all frequencies between 769-775 MHz and 799-805 MHz, attenuation by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations. On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, attenuation by at least $43 + 10 \log(P)$ dB $> 43 + 10 \log_{10}(P[\text{Watts}])$ for all out-of-band emissions outside of those specified in 90.543(e)	PASS	Sections 7.4, 7.5
	Conducted Band Edge / Spurious Emissions (LTE Band 26; NR Band n26)	2.1051, 90.691(a)	N/A	$> 43 + 10 \log_{10}(P[\text{Watts}])$ for all out-of-band emissions except emissions beyond 37.5kHz from the block edge $> 50 + 10 \log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge	PASS	Sections 7.4, 7.5
	Frequency Stability	2.1055, 90.213	RSS-Gen(6.11), RSS-140(4.2)	< 2.5 ppm **Fundamental emissions stay within authorized frequency block	PASS	Section 7.8
RADIATED	Effective Radiated Power (LTE Band 14)	90.542(a)(7)	RSS-Gen(6.12), RSS-140(4.3)	< 3 Watts max. ERP	PASS	Section 7.6
	Effective Radiated Power (LTE Band 26; NR Band n26)	22.913(a)(2)	N/A	< 7 Watts max. ERP	PASS	Section 7.6
	Radiated Spurious Emissions (LTE Band 14)	2.1053, 90.543(e)(f)	RSS-Gen(7.3), RSS-140(4.4)	$> 43 + 10 \log_{10}(P[\text{Watts}])$ for all out-of-band emissions except emissions in the 1559 - 1610MHz band are subject to a limit of -40dBm/MHz for wideband signals	PASS	Section 7.7
	Radiated Spurious Emissions (LTE Band 26; NR Band n26)	2.1053, 90.691(a)	N/A	$> 43 + 10 \log_{10}(P[\text{Watts}])$ for all out-of-band emissions except emissions beyond 37.5kHz from the block edge $> 50 + 10 \log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge	PASS	Section 7.7

Table 7-1. Summary of Test Results

FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 11 of 96

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Section 7.0 were taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is EMC Software Tool v1.1.

FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 12 of 96

7.2 Conducted Output Power Data

Test Overview

All emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 – Section 5.2

Test Settings

1. Span = 2 x OBW to 3 x OBW
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

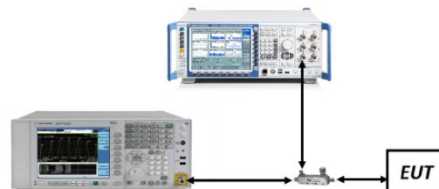


Figure 7-1. Test Instrument & Measurement Setup

Test Notes

1. For LTE mode, the device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1 RB.
2. Conducted power measurements were evaluated using various combinations of RB size, RB offset, modulation, and channel bandwidth. Channel bandwidth data is shown in the tables below based only on the channel bandwidths that were supported in this device.
3. All other conducted power measurements are contained in the RF exposure report for this filing.
4. Conducted power was found to reduce for the higher order QAM modulations when compared to 16QAM. Due to this trend, only the worst-case QAM (16QAM) powers are included in this section.

FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 13 of 96

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]	Conducted Power [Watts]	Conducted Power Limit [dBm]	Margin [dB]
15 MHz	QPSK	26765	821.5	1 / 37	24.02	0.253	50.00	-25.98
	16-QAM	26765	821.5	1 / 37	23.03	0.201	50.00	-26.97
10 MHz	QPSK	26740	819.0	1 / 0	24.14	0.259	50.00	-25.86
	16-QAM	26740	819.0	1 / 0	23.32	0.215	50.00	-26.68
5 MHz	QPSK	26715	816.5	1 / 12	24.07	0.255	50.00	-25.93
		26765	821.5	1 / 12	24.02	0.252	50.00	-25.98
	16-QAM	26715	816.5	1 / 12	23.12	0.205	50.00	-26.88
		26765	821.5	1 / 12	23.04	0.202	50.00	-26.96
3 MHz	QPSK	26705	815.5	1 / 7	24.16	0.261	50.00	-25.84
		26775	822.5	1 / 14	23.99	0.251	50.00	-26.01
	16-QAM	26705	815.5	1 / 7	23.18	0.208	50.00	-26.82
		26775	822.5	1 / 14	22.96	0.198	50.00	-27.04
1.4 MHz	QPSK	26697	814.7	1 / 5	23.98	0.250	50.00	-26.02
		26783	823.3	1 / 5	23.96	0.249	50.00	-26.04
	16-QAM	26697	814.7	1 / 5	22.96	0.198	50.00	-27.04
		26783	823.3	1 / 5	23.06	0.202	50.00	-26.94

Table 7-2. Conducted Power Output Data (LTE Band 26 – Ant A)

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]	Conducted Power [Watts]	Conducted Power Limit [dBm]	Margin [dB]
15 MHz	QPSK	26765	821.5	1 / 0	23.62	0.230	50.00	-26.38
	16-QAM	26765	821.5	1 / 0	22.71	0.187	50.00	-27.29
10 MHz	QPSK	26740	819.0	1 / 0	23.55	0.226	50.00	-26.45
	16-QAM	26740	819.0	1 / 0	22.64	0.184	50.00	-27.36
5 MHz	QPSK	26715	816.5	1 / 12	23.64	0.231	50.00	-26.36
		26765	821.5	1 / 12	23.62	0.230	50.00	-26.38
	16-QAM	26715	816.5	1 / 12	22.71	0.187	50.00	-27.29
		26765	821.5	1 / 12	22.81	0.191	50.00	-27.19
3 MHz	QPSK	26705	815.5	1 / 7	23.54	0.226	50.00	-26.46
		26775	822.5	1 / 7	23.63	0.231	50.00	-26.37
	16-QAM	26705	815.5	1 / 7	22.60	0.182	50.00	-27.40
		26775	822.5	1 / 7	22.60	0.182	50.00	-27.40
1.4 MHz	QPSK	26697	814.7	1 / 3	23.54	0.226	50.00	-26.46
		26783	823.3	1 / 3	23.50	0.224	50.00	-26.50
	16-QAM	26697	814.7	1 / 3	22.63	0.183	50.00	-27.37
		26783	823.3	1 / 3	22.53	0.179	50.00	-27.47

Table 7-3. Conducted Power Output Data (LTE Band 26 – Ant E)

FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 14 of 96

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]	Conducted Power [Watts]	Conducted Power Limit [dBm]	Margin [dB]
10 MHz	QPSK	23330	793.0	1 / 25	24.09	0.257	50.00	-25.91
	16-QAM	23330	793.0	1 / 25	23.37	0.217	50.00	-26.63
5 MHz	QPSK	23305	790.5	1 / 12	24.04	0.253	50.00	-25.96
		23330	793.0	1 / 0	24.03	0.253	50.00	-25.97
		23355	795.5	1 / 24	24.07	0.255	50.00	-25.93
	16-QAM	23305	790.5	1 / 12	23.05	0.202	50.00	-26.95
		23330	793.0	1 / 0	23.14	0.206	50.00	-26.86
		23355	795.5	1 / 24	23.18	0.208	50.00	-26.82

Table 7-4. Conducted Power Output Data (LTE Band 14 – Ant A)

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]	Conducted Power [Watts]	Conducted Power Limit [dBm]	Margin [dB]
10 MHz	QPSK	23330	793.0	1 / 49	23.91	0.246	50.00	-26.09
	16-QAM	23330	793.0	1 / 49	22.86	0.193	50.00	-27.14
5 MHz	QPSK	23305	790.5	1 / 0	23.84	0.242	50.00	-26.16
		23330	793.0	1 / 12	23.91	0.246	50.00	-26.09
		23355	795.5	1 / 24	23.81	0.240	50.00	-26.19
	16-QAM	23305	790.5	1 / 0	22.91	0.195	50.00	-27.09
		23330	793.0	1 / 12	22.91	0.195	50.00	-27.09
		23355	795.5	1 / 24	22.86	0.193	50.00	-27.14

Table 7-5. Conducted Power Output Data (LTE Band 14 – Ant E)

FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 15 of 96

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]	Conducted Power [Watts]	Conducted Power Limit [dBm]	Margin [dB]
20 MHz	$\pi/2$ BPSK	164800	824.0	1 / 53	24.07	0.255	50.00	-25.93
	QPSK	164800	824.0	1 / 1	24.05	0.254	50.00	-25.95
	16-QAM	164800	824.0	1 / 53	22.62	0.183	50.00	-27.38
15 MHz	$\pi/2$ BPSK	164300	821.5	1 / 1	24.26	0.267	50.00	-25.74
	QPSK	164300	821.5	1 / 1	24.03	0.253	50.00	-25.97
	16-QAM	164300	821.5	1 / 1	22.99	0.199	50.00	-27.01
10 MHz	$\pi/2$ BPSK	163800	819.0	1 / 1	24.13	0.259	50.00	-25.87
	QPSK	163800	819.0	1 / 50	24.01	0.252	50.00	-25.99
	16-QAM	163800	819.0	1 / 1	23.08	0.203	50.00	-26.92
5 MHz	$\pi/2$ BPSK	163300	816.5	1 / 1	24.31	0.270	50.00	-25.69
		164300	821.5	1 / 12	24.09	0.256	50.00	-25.91
	QPSK	163300	816.5	1 / 1	24.25	0.266	50.00	-25.75
		164300	821.5	1 / 1	23.95	0.248	50.00	-26.05
	16-QAM	163300	816.5	1 / 1	22.77	0.189	50.00	-27.23
		164300	821.5	1 / 1	22.80	0.191	50.00	-27.20

Table 7-6. Conducted Power Output Data (NR Band n26 – Ant A)

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]	Conducted Power [Watts]	Conducted Power Limit [dBm]	Margin [dB]
20 MHz	$\pi/2$ BPSK	164800	824.0	1 / 104	23.25	0.211	50.00	-26.75
	QPSK	164800	824.0	1 / 104	23.29	0.213	50.00	-26.71
	16-QAM	164800	824.0	1 / 104	22.46	0.176	50.00	-27.54
15 MHz	$\pi/2$ BPSK	164300	821.5	1 / 77	23.19	0.208	50.00	-26.81
	QPSK	164300	821.5	1 / 77	23.10	0.204	50.00	-26.90
	16-QAM	164300	821.5	1 / 77	22.53	0.179	50.00	-27.47
10 MHz	$\pi/2$ BPSK	163800	819.0	1 / 1	23.19	0.208	50.00	-26.81
	QPSK	163800	819.0	1 / 1	23.18	0.208	50.00	-26.82
	16-QAM	163800	819.0	1 / 1	22.58	0.181	50.00	-27.42
5 MHz	$\pi/2$ BPSK	163300	816.5	1 / 39	23.19	0.208	50.00	-26.81
		164300	821.5	1 / 1	23.20	0.209	50.00	-26.80
	QPSK	163300	816.5	1 / 77	23.11	0.205	50.00	-26.89
		164300	821.5	1 / 39	23.21	0.209	50.00	-26.79
	16-QAM	163300	816.5	1 / 39	22.65	0.184	50.00	-27.35
		164300	821.5	1 / 39	22.60	0.182	50.00	-27.40

Table 7-7. Conducted Power Output Data (NR Band n26 – Ant E)

FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 16 of 96

7.3 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 – Section 5.4.4

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

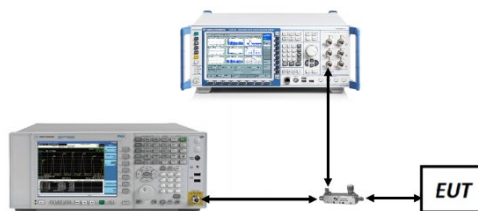


Figure 7-2. Test Instrument & Measurement Setup

Test Notes

None


FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 17 of 96

Mode	Bandwidth	Modulation	OBW [MHz]
LTE-B26	15 MHz	QPSK	13.52
		16QAM	13.48
	10 MHz	QPSK	9.01
		16QAM	9.02
	5 MHz	QPSK	4.54
		16QAM	4.52
	3 MHz	QPSK	2.71
		16QAM	2.71
	1.4 MHz	QPSK	1.10
		16QAM	1.09
LTE-B14	10 MHz	QPSK	9.08
		16QAM	9.01
	5 MHz	QPSK	4.54
		16QAM	4.52
NR-n26	20 MHz	$\pi/2$ BPSK	17.95
		QPSK	19.03
		16QAM	19.04
	15 MHz	$\pi/2$ BPSK	13.49
		QPSK	14.18
		16QAM	14.19
	10 MHz	$\pi/2$ BPSK	9.00
		QPSK	9.38
		16QAM	9.39
	5 MHz	$\pi/2$ BPSK	4.51
		QPSK	4.52
		16QAM	4.52


Table 7-8. Occupied Bandwidth Test Results – Ant A

FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 18 of 96

LTE Band 14 – Ant A


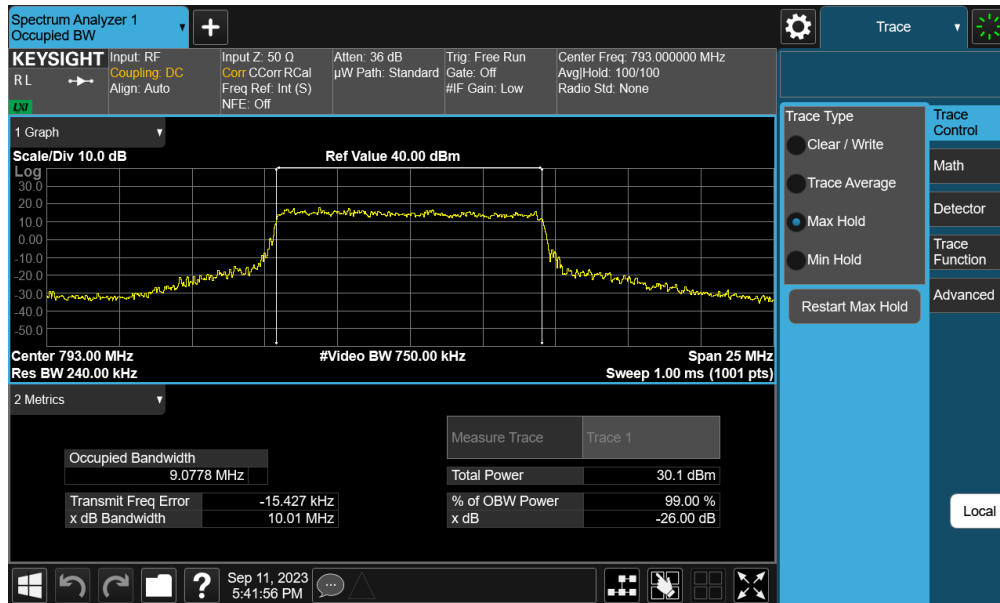


Plot 7-1. Occupied Bandwidth Plot (LTE Band 14 - 10MHz QPSK - Full RB Configuration – Ant A)

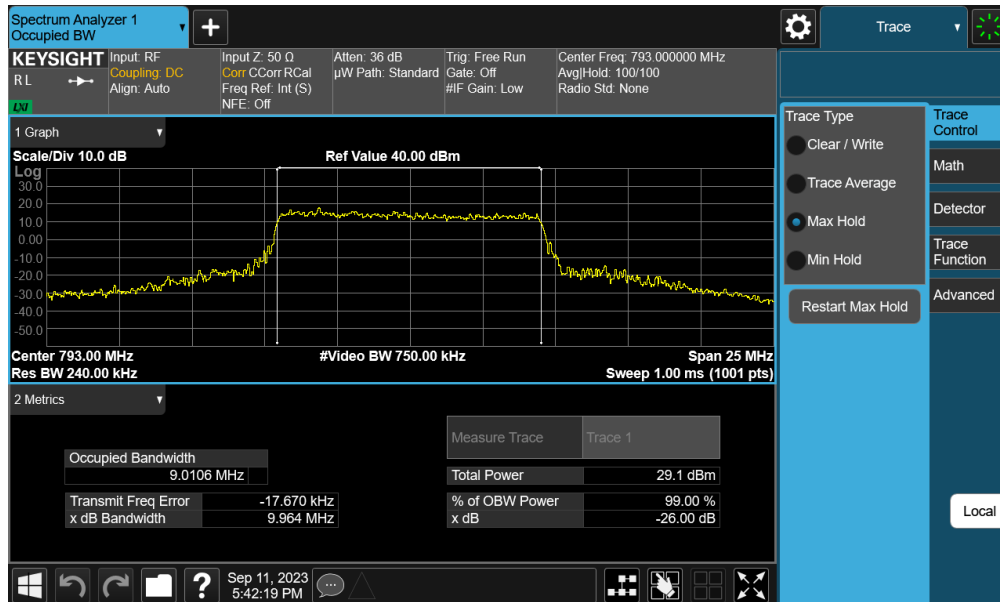



Plot 7-2. Occupied Bandwidth Plot (LTE Band 14 - 10MHz 16-QAM - Full RB Configuration – Ant A)

FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 19 of 96

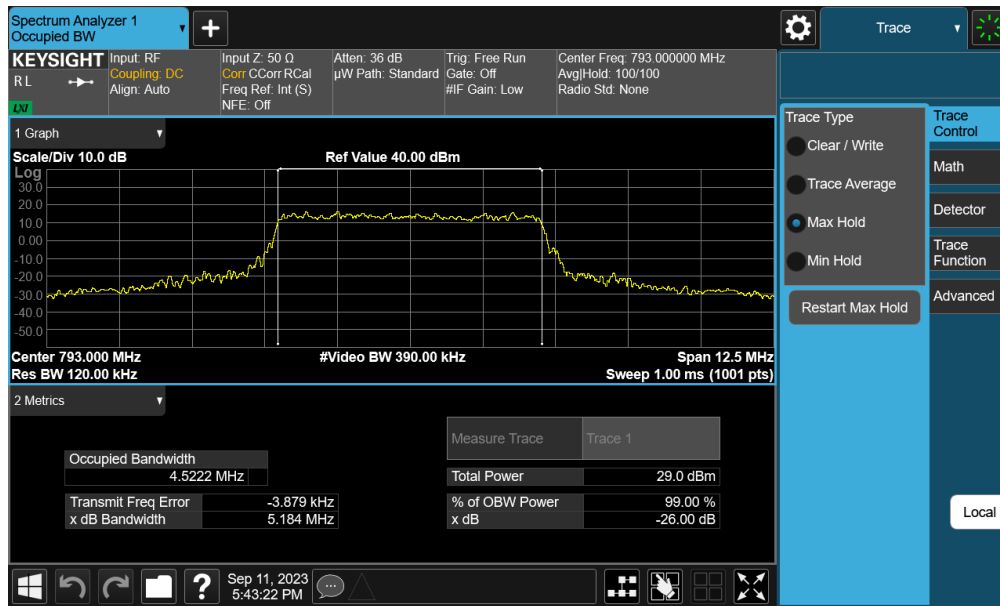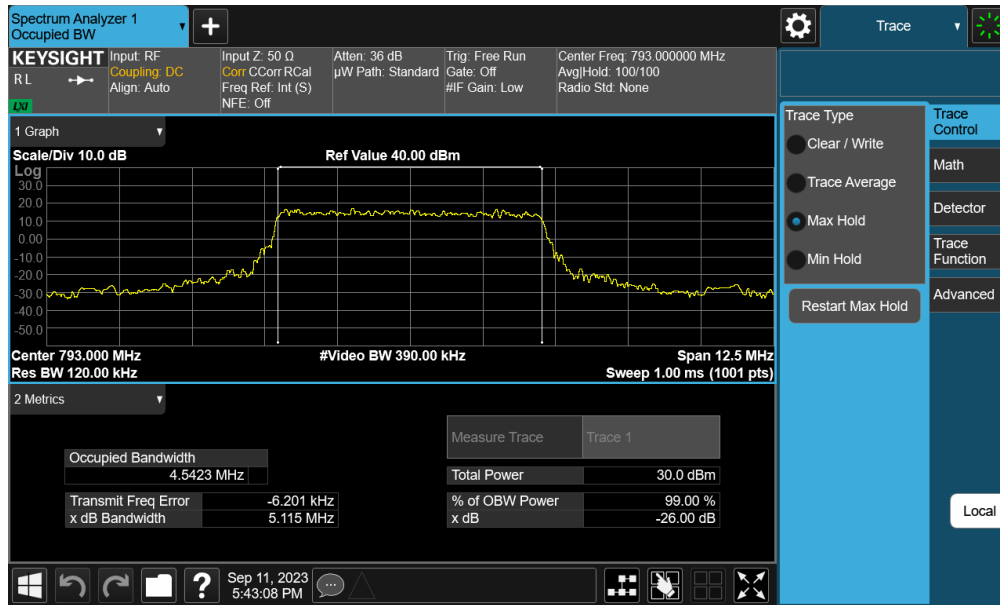


FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 20 of 96


LTE Band 26 – Ant A

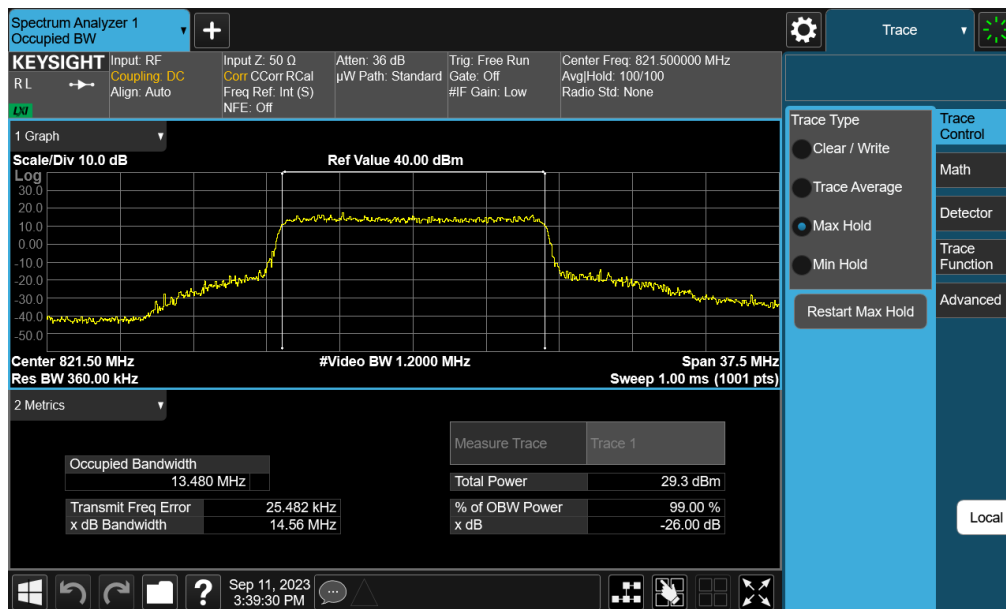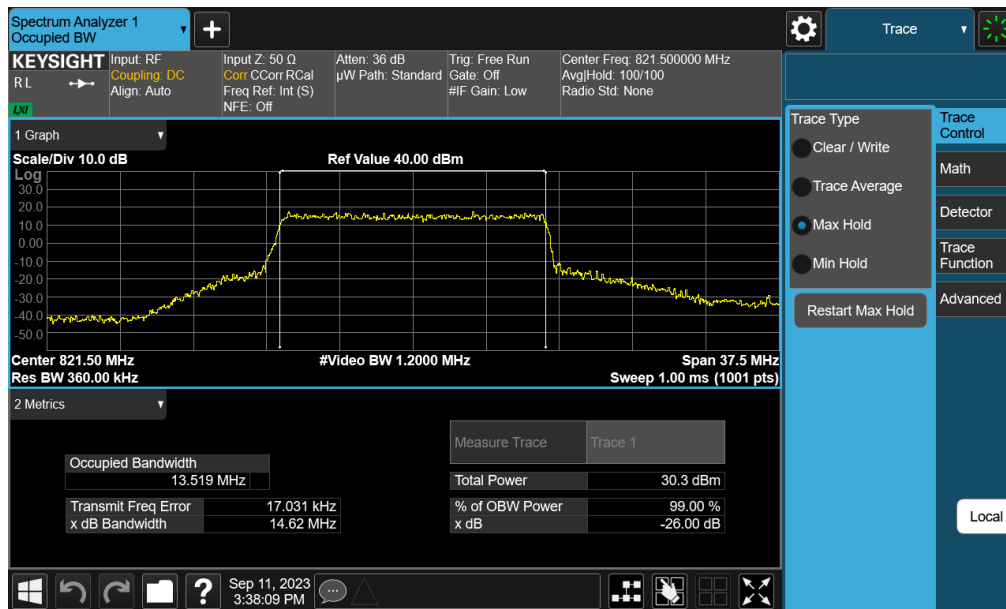

FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 21 of 96

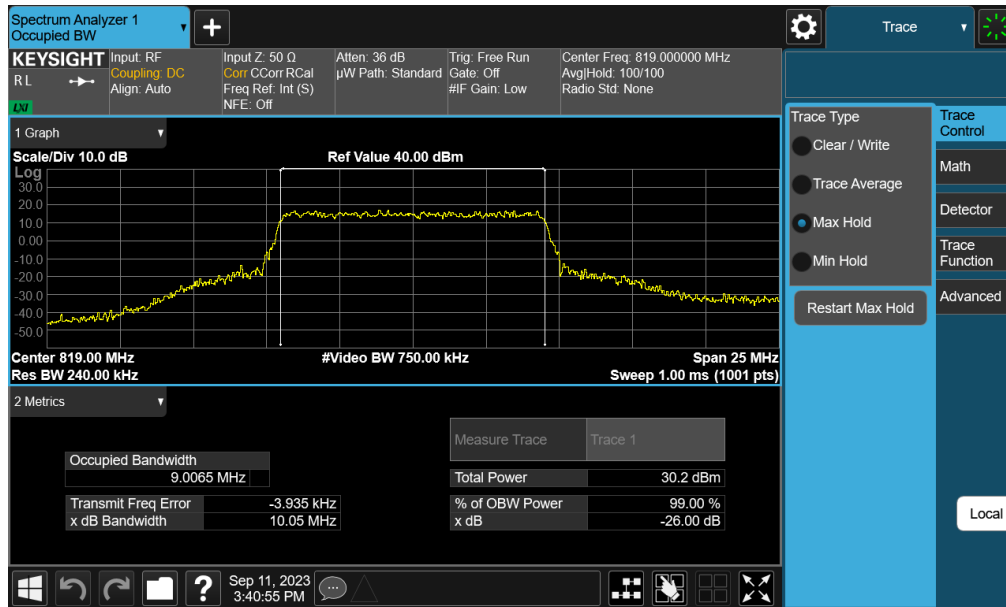


Plot 7-7. Occupied Bandwidth Plot (LTE Band 26 - 10MHz QPSK - Full RB Configuration – Ant A)

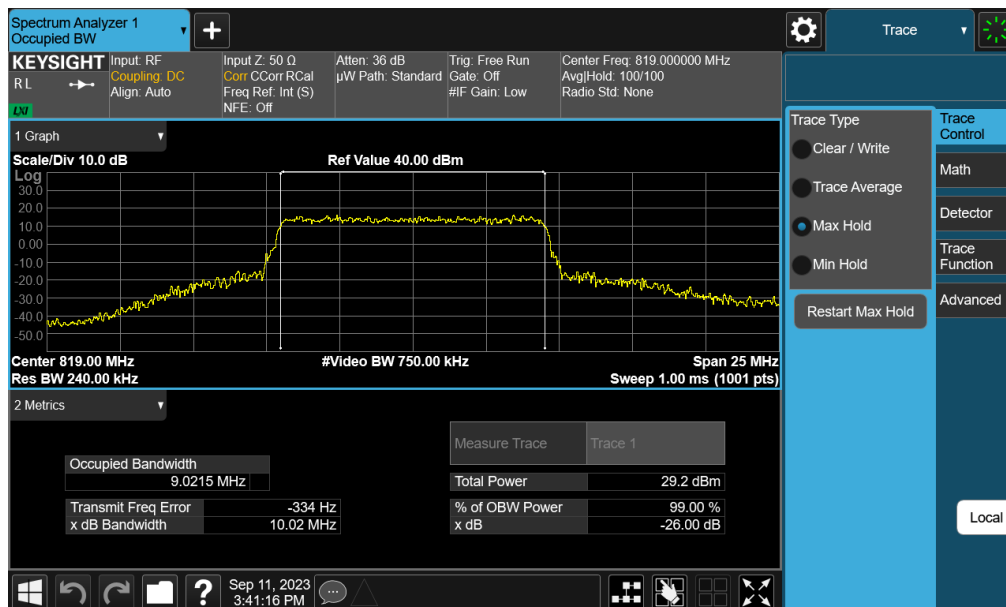


Plot 7-8. Occupied Bandwidth Plot (LTE Band 26 - 10MHz 16-QAM - Full RB Configuration – Ant A)

FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 22 of 96


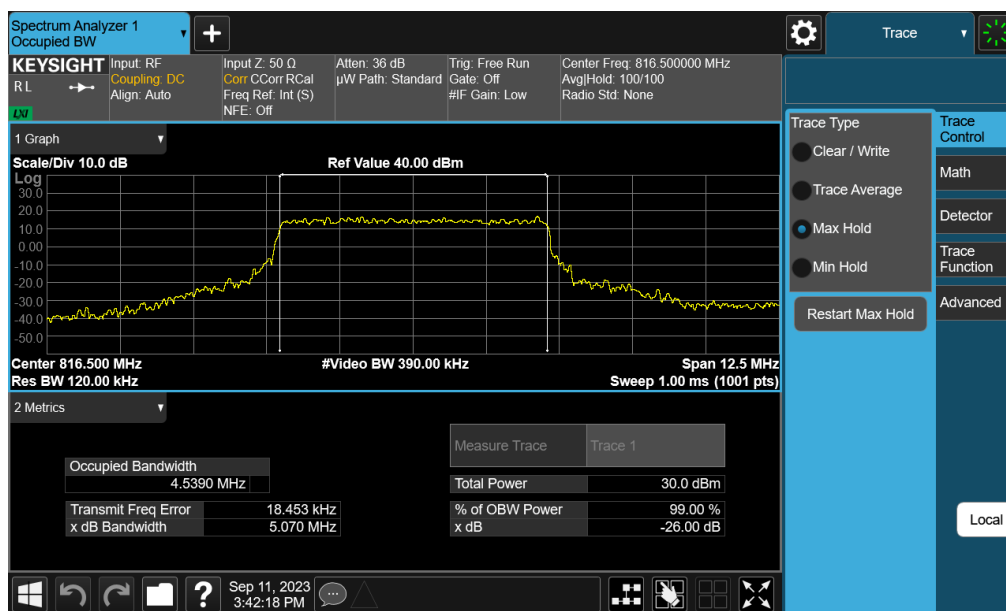


Plot 7-9. Occupied Bandwidth Plot (LTE Band 26 - 5MHz QPSK - Full RB Configuration – Ant A)


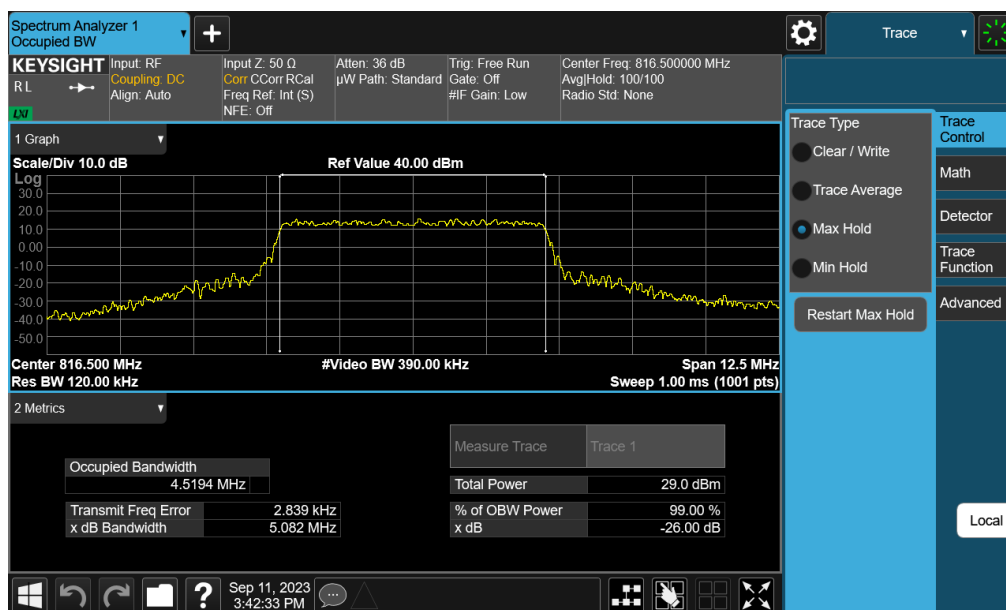


Plot 7-10. Occupied Bandwidth Plot (LTE Band 26 - 5MHz 16-QAM - Full RB Configuration – Ant A)

FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 23 of 96

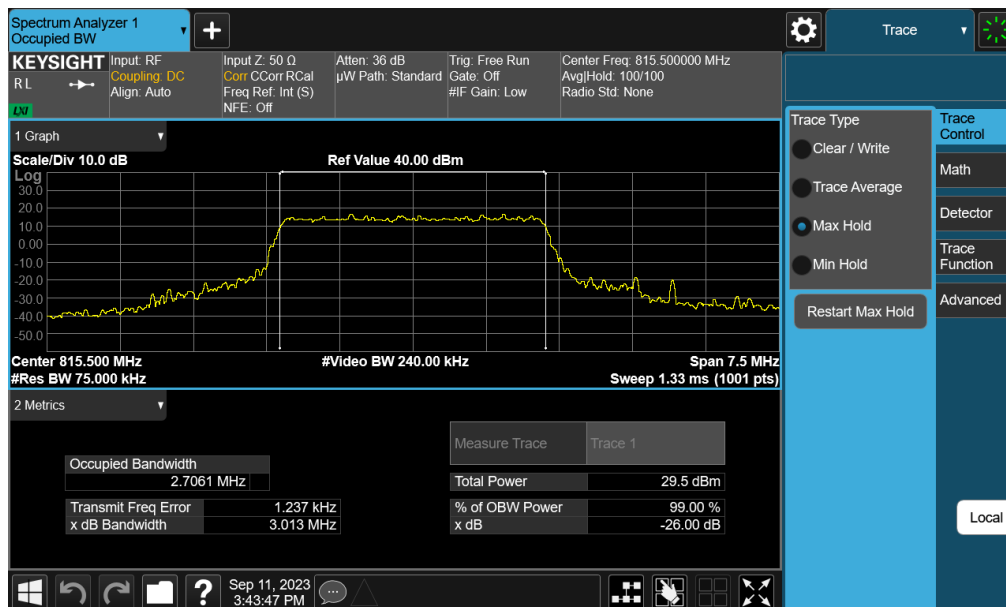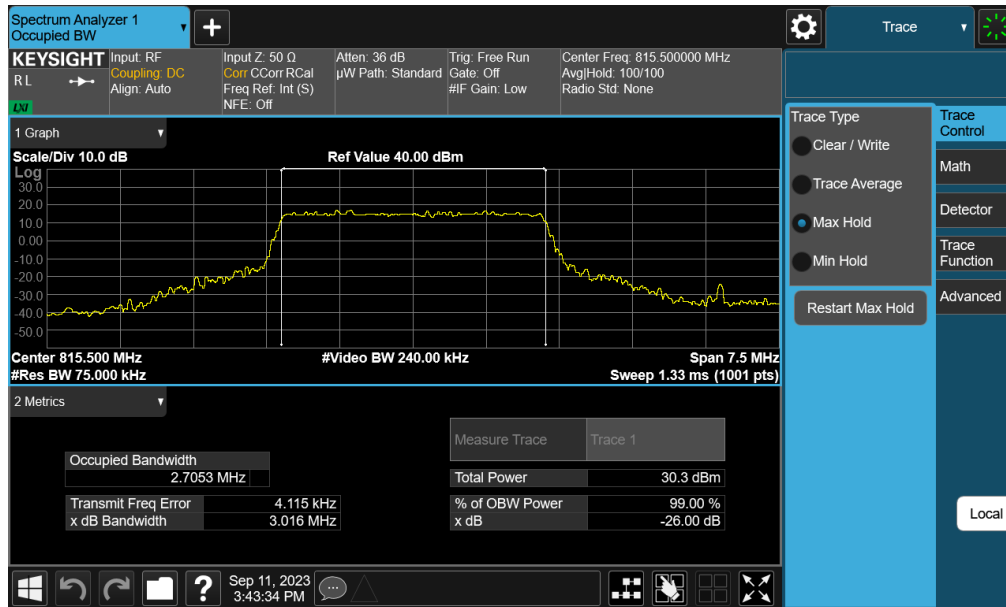


FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 24 of 96

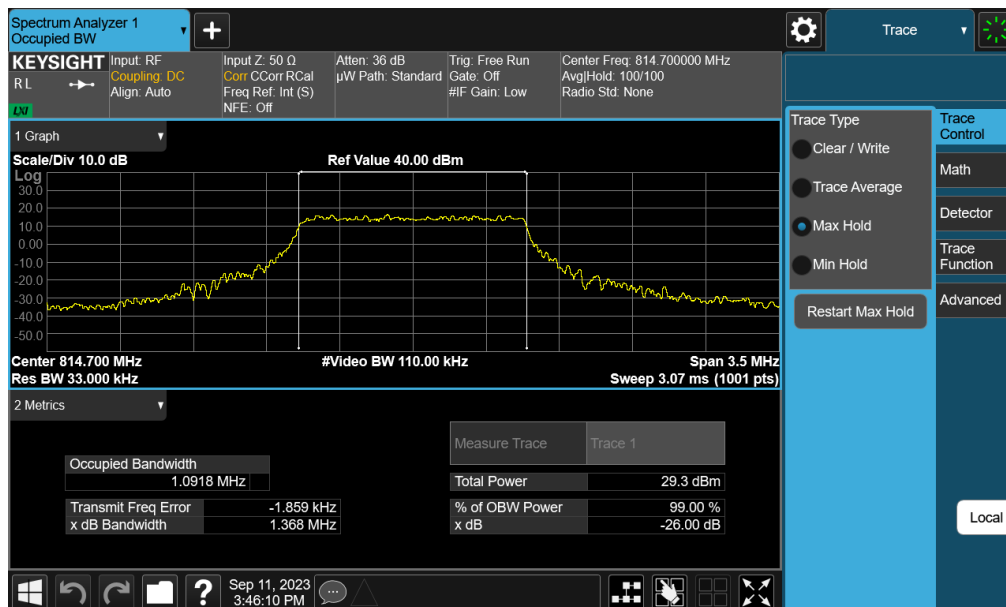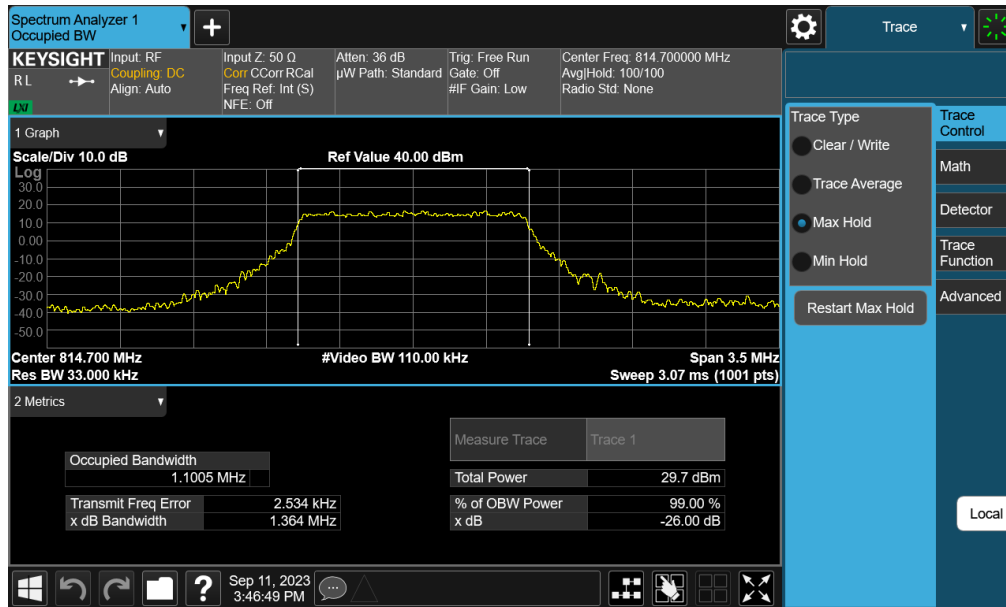


FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 25 of 96

NR Band n26 – Ant A

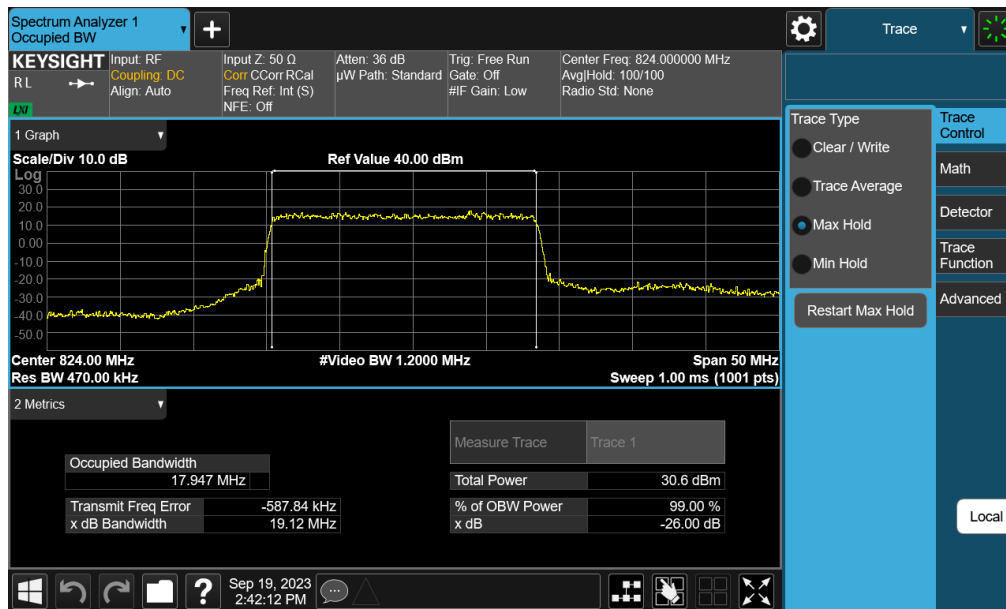


Plot 7-15. Occupied Bandwidth Plot (NR Band n26 - 20MHz $\pi/2$ BPSK - Full RB Configuration – Ant A)

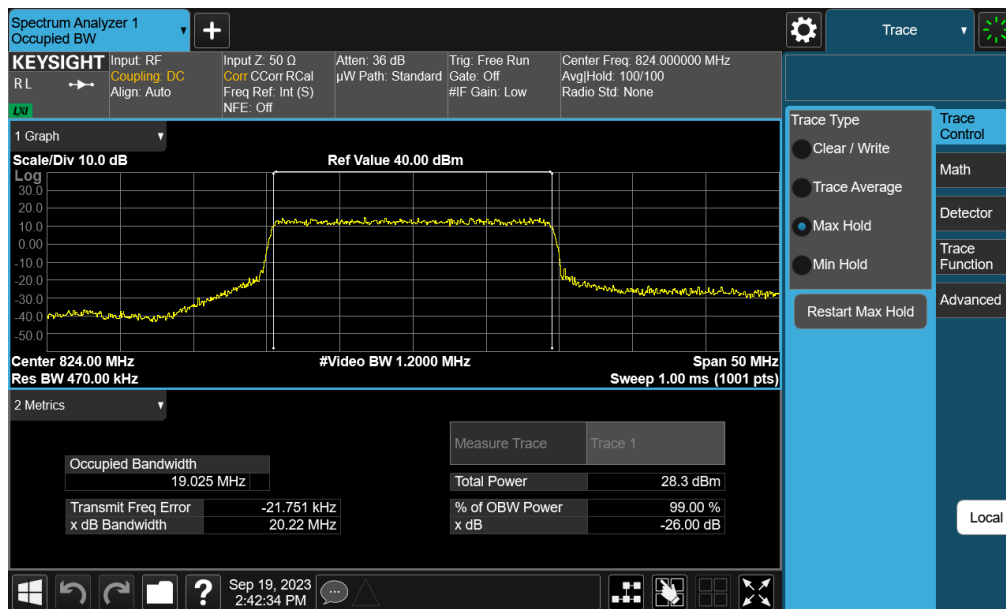


Plot 7-16. Occupied Bandwidth Plot (NR Band n26 - 20MHz QPSK - Full RB Configuration – Ant A)

FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 26 of 96

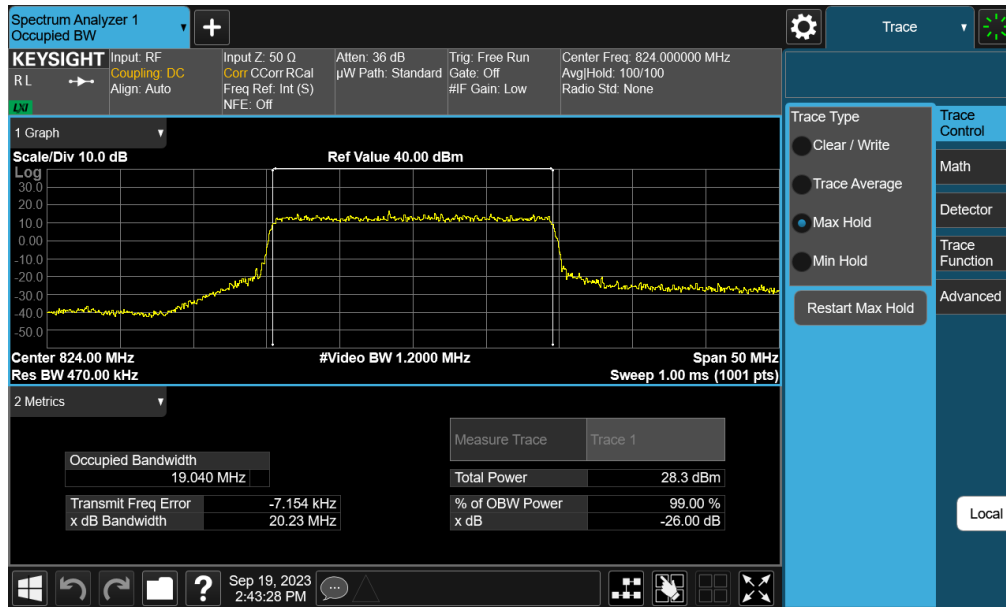


Plot 7-17. Occupied Bandwidth Plot (NR Band n26 - 20MHz 16-QAM - Full RB Configuration – Ant A)

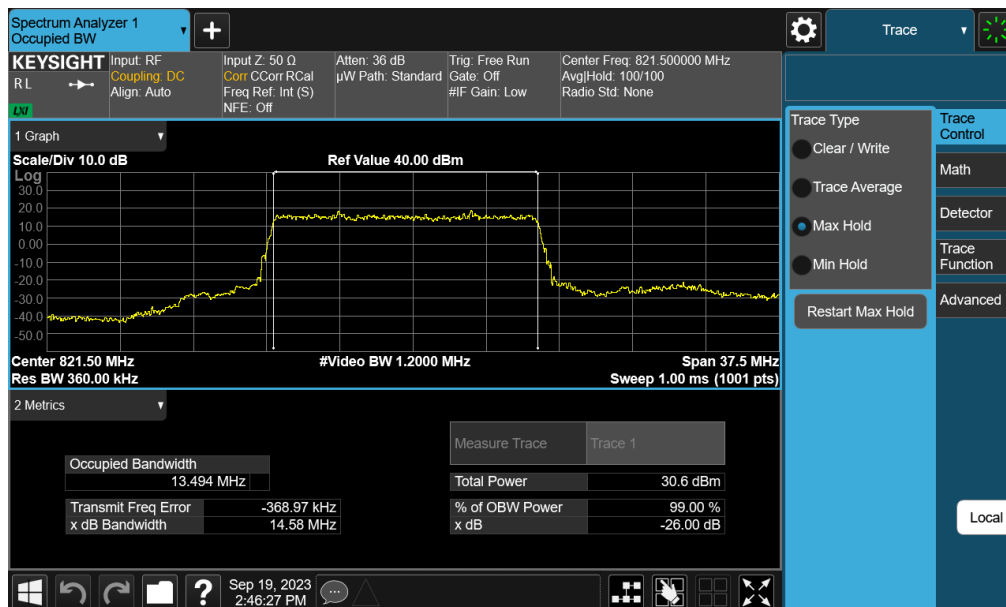


Plot 7-18. Occupied Bandwidth Plot (NR Band n26 - 15MHz $\pi/2$ BPSK - Full RB Configuration – Ant A)

FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 27 of 96

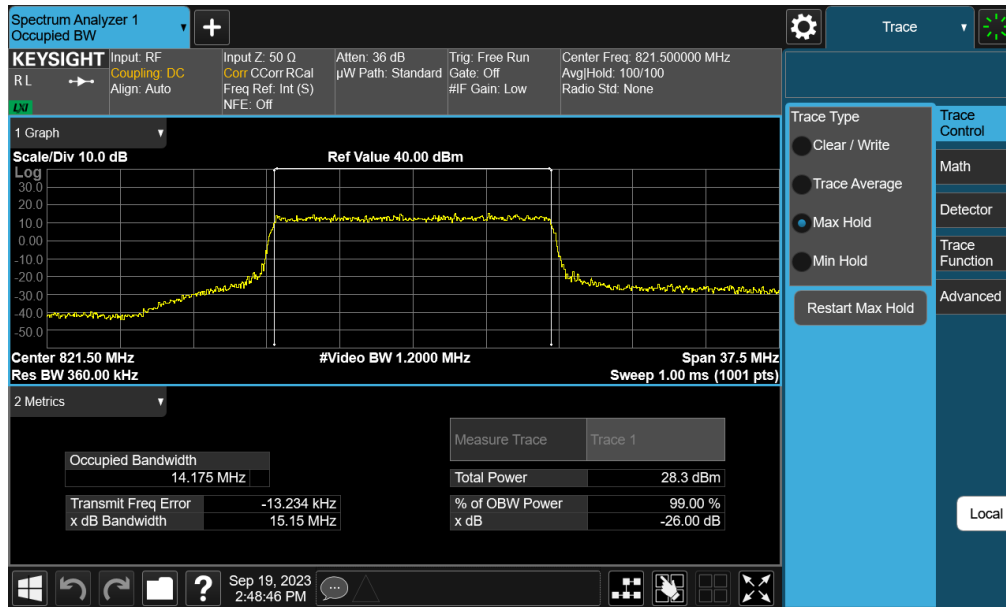


Plot 7-19. Occupied Bandwidth Plot (NR Band n26 - 15MHz QPSK - Full RB Configuration – Ant A)

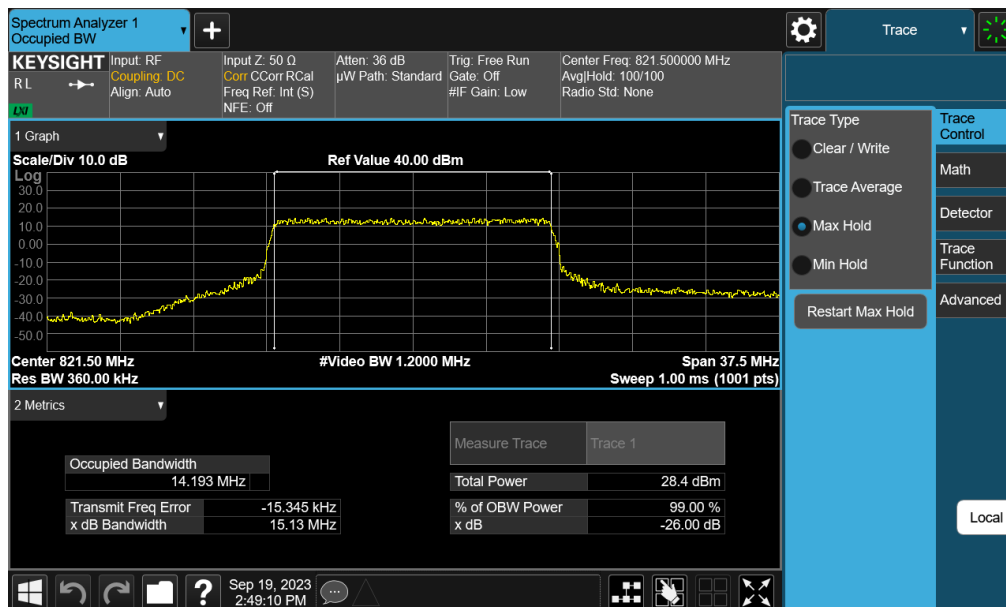


Plot 7-20. Occupied Bandwidth Plot (NR Band n26 - 15MHz 16-QAM - Full RB Configuration – Ant A)

FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 28 of 96

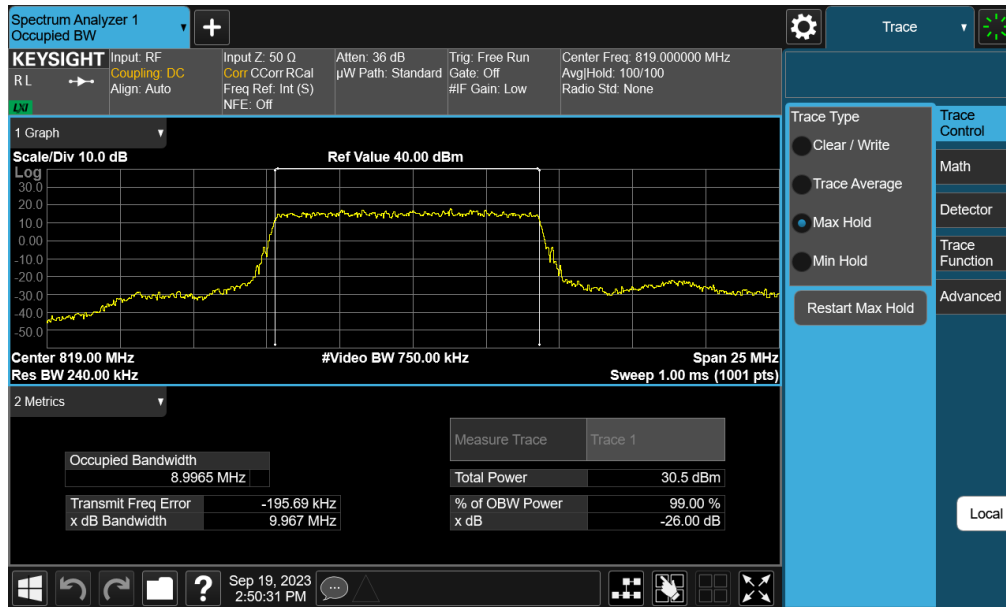


Plot 7-21. Occupied Bandwidth Plot (NR Band n26 - 10MHz $\pi/2$ BPSK - Full RB Configuration – Ant A)


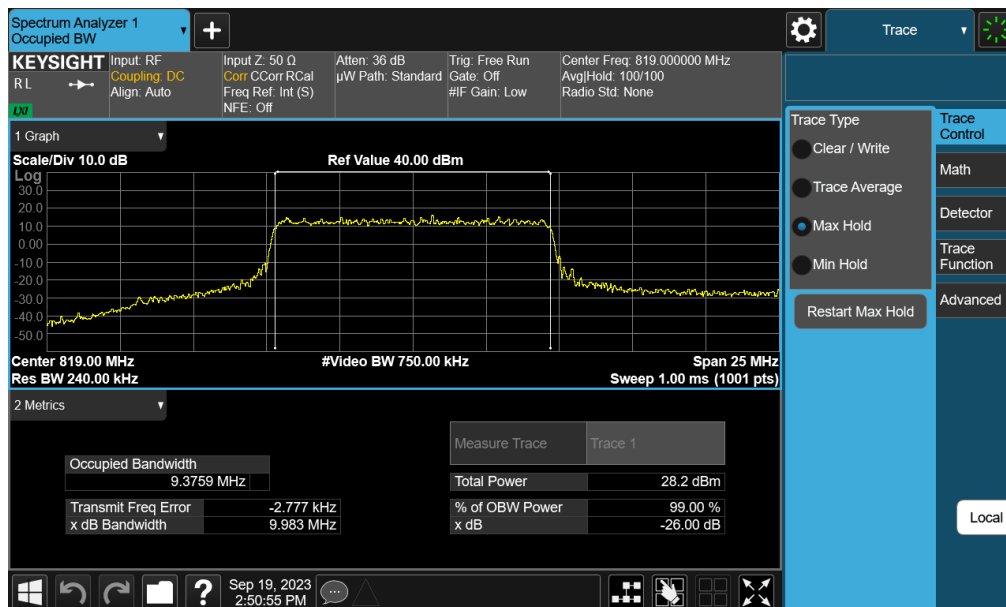


Plot 7-22. Occupied Bandwidth Plot (NR Band n26 - 10MHz QPSK - Full RB Configuration – Ant A)

FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 29 of 96

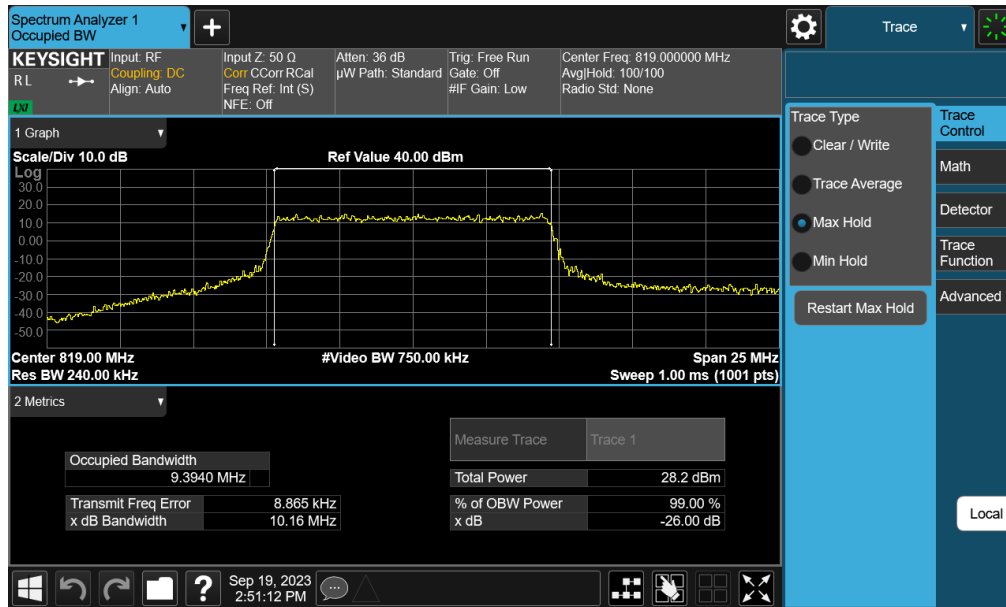

FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 30 of 96

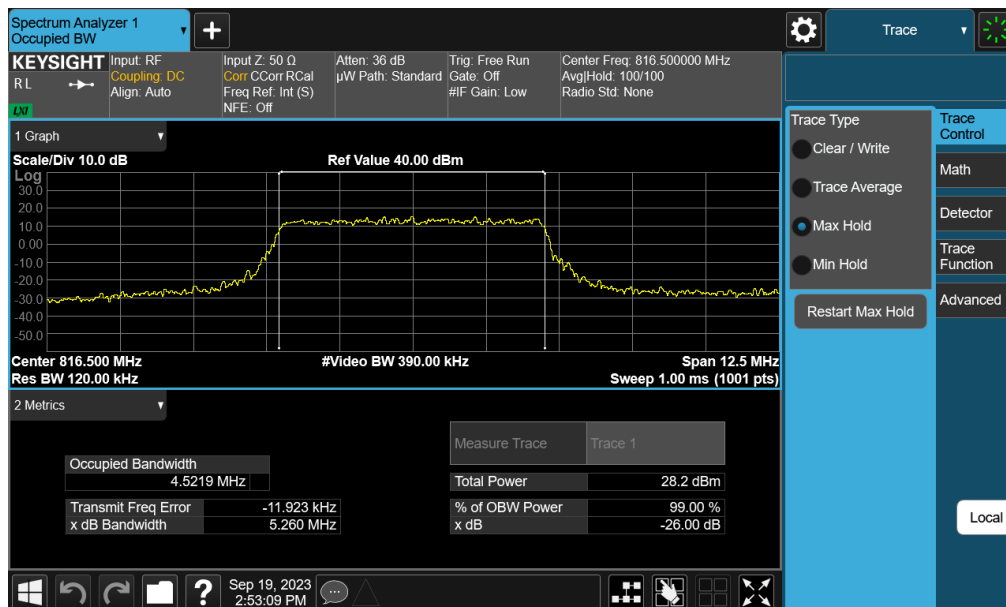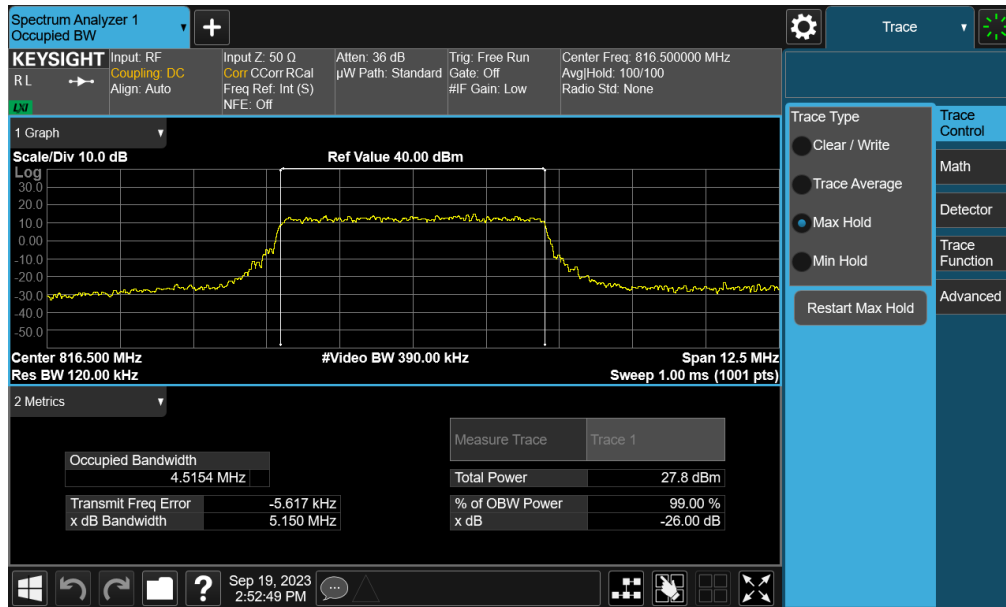



FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 31 of 96

Mode	Bandwidth	Modulation	OBW [MHz]
LTE-B26	15 MHz	QPSK	13.49
		16QAM	13.49
	10 MHz	QPSK	9.01
		16QAM	8.99
	5 MHz	QPSK	4.51
		16QAM	4.51
	3 MHz	QPSK	2.71
		16QAM	2.71
	1.4 MHz	QPSK	1.10
		16QAM	1.10
LTE-B14	10 MHz	QPSK	9.02
		16QAM	9.03
	5 MHz	QPSK	4.53
		16QAM	4.54
NR-n26	20 MHz	$\pi/2$ BPSK	18.01
		QPSK	19.03
		16QAM	19.05
	15 MHz	$\pi/2$ BPSK	13.53
		QPSK	14.19
		16QAM	14.19
	10 MHz	$\pi/2$ BPSK	8.97
		QPSK	9.36
		16QAM	9.37
	5 MHz	$\pi/2$ BPSK	4.51
		QPSK	4.52
		16QAM	4.51



Table 7-9. Occupied Bandwidth Test Results – Ant E

FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 32 of 96

LTE Band 14 – Ant E

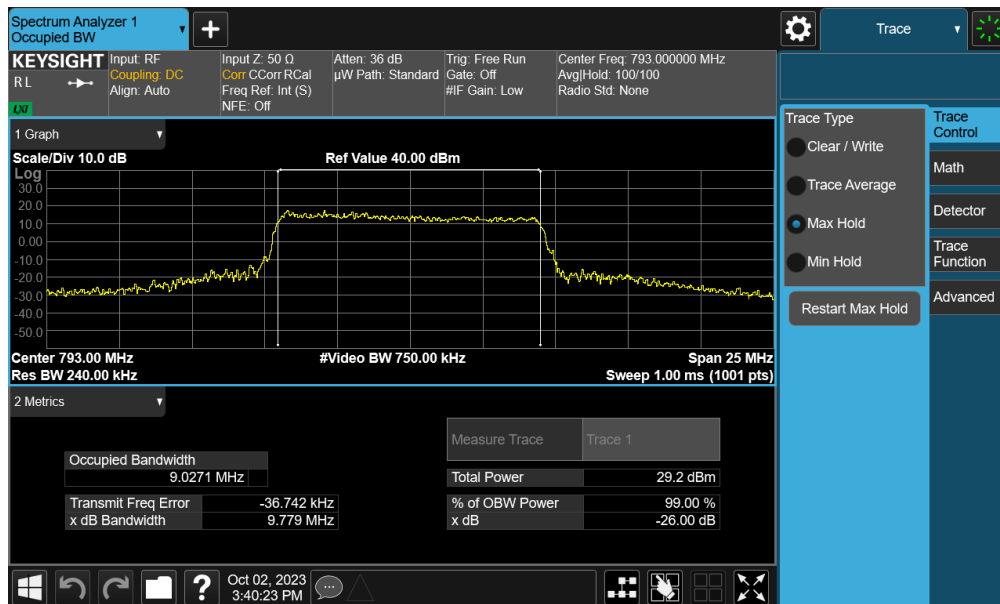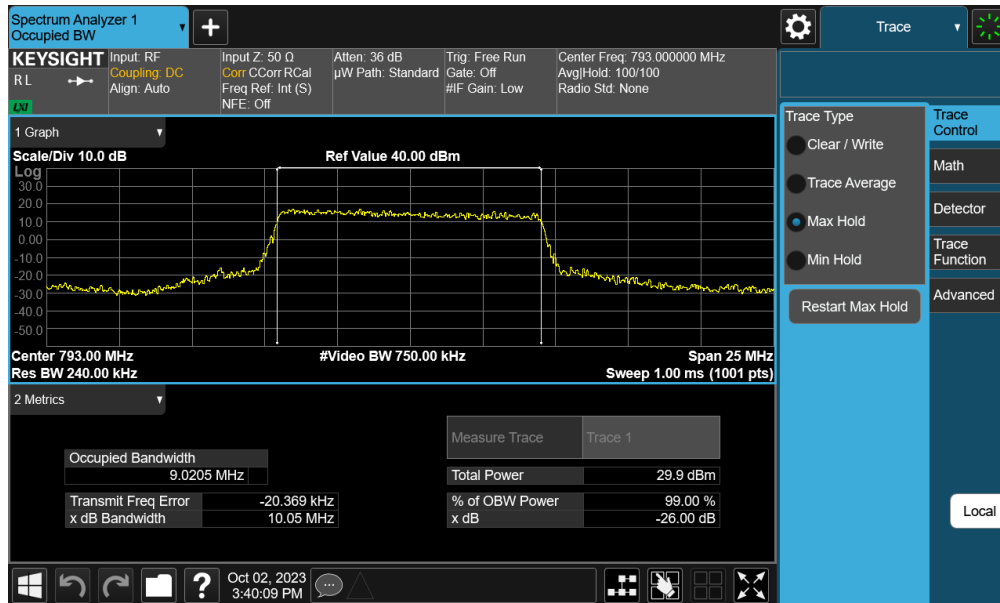


FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 33 of 96

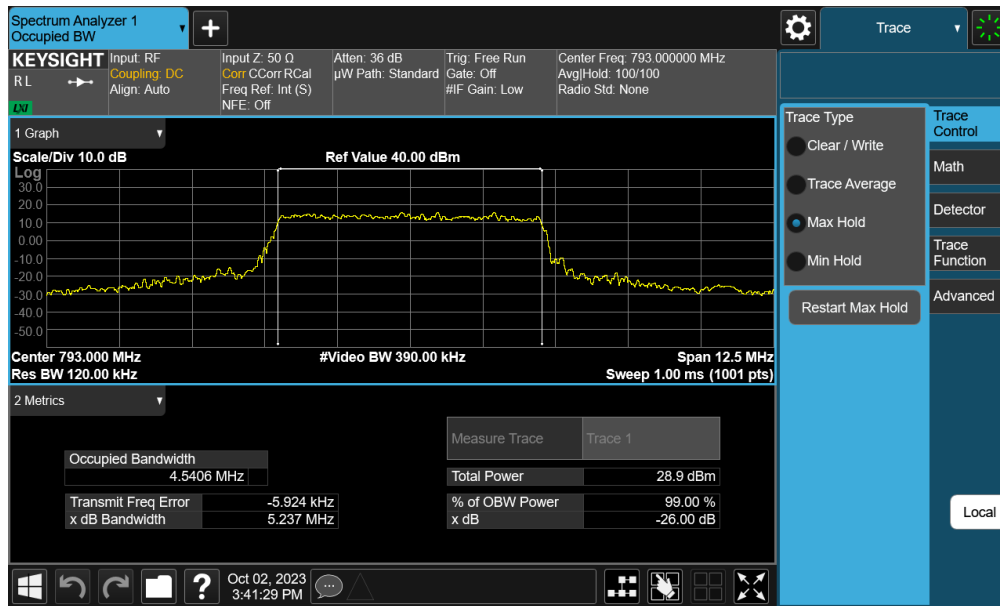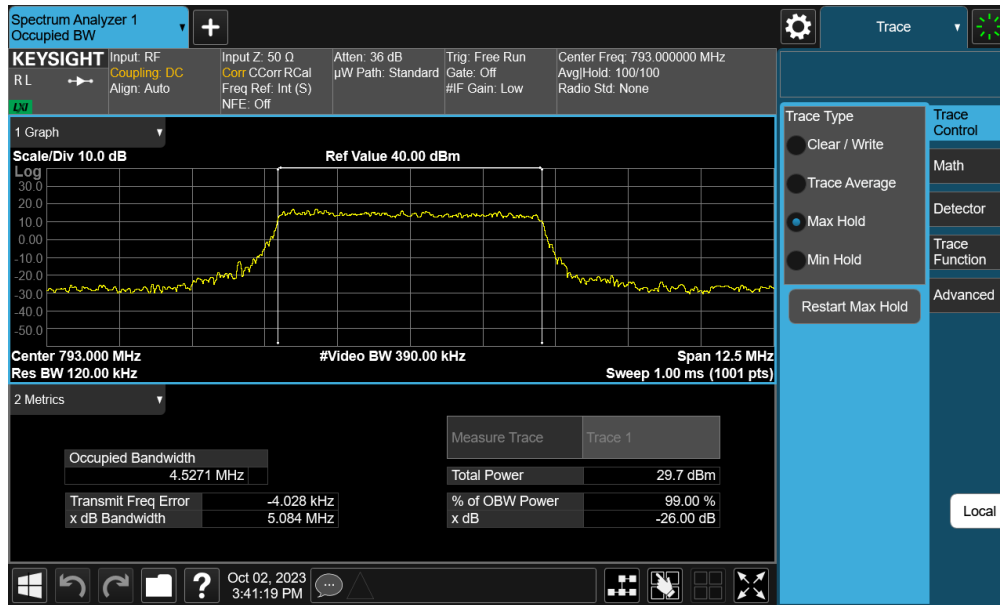


FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 34 of 96

LTE Band 26 – Ant E

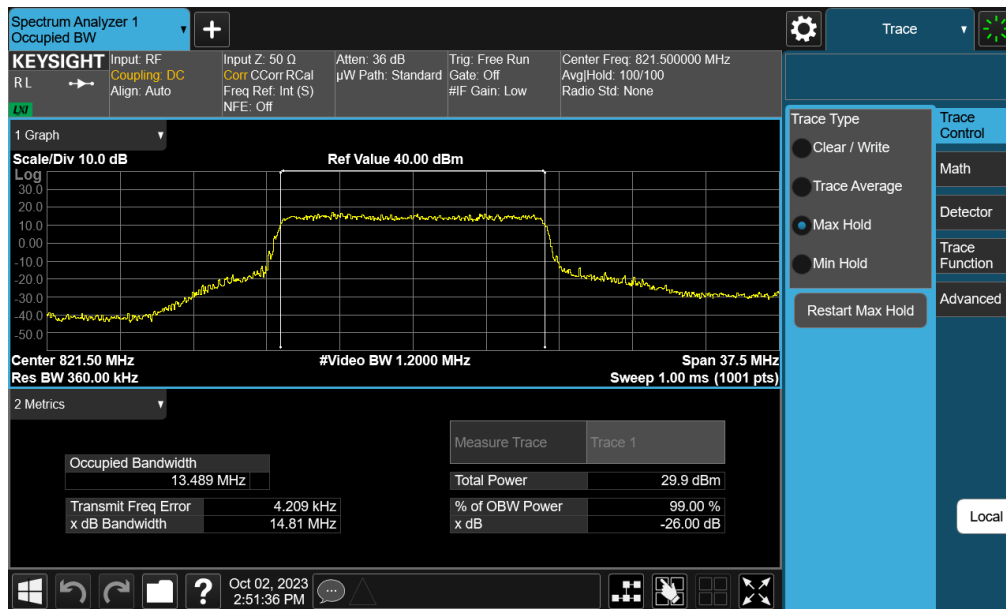

Plot 7-31. Occupied Bandwidth Plot (LTE Band 26 - 15MHz QPSK - Full RB Configuration – Ant E)

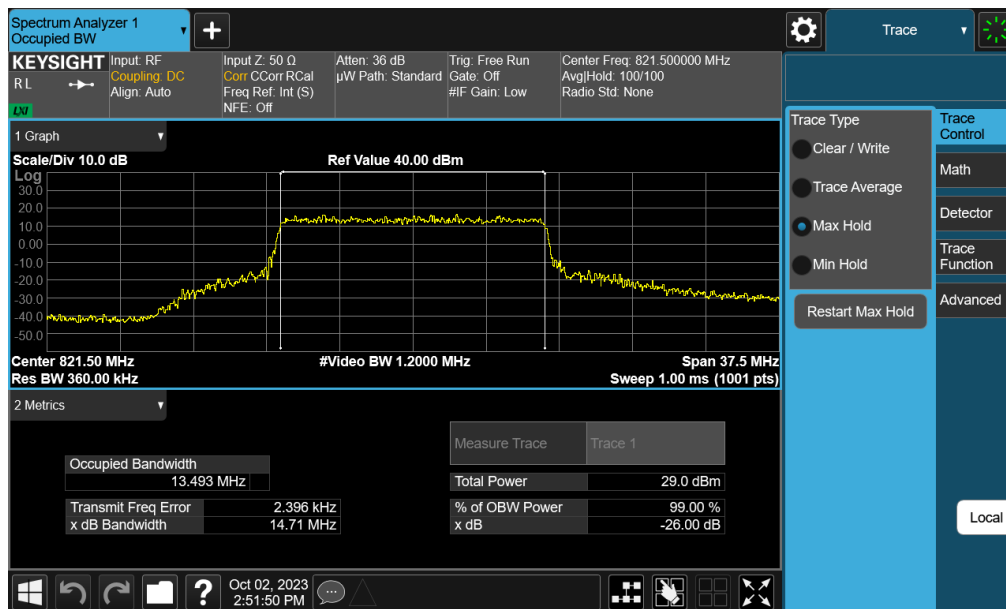

Plot 7-32. Occupied Bandwidth Plot (LTE Band 26 - 15MHz 16-QAM - Full RB Configuration – Ant E)

FCC ID: A3LSMS928U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210092-07.A3L	Test Dates: 9/11/2023 - 10/11/2023	EUT Type: Portable Handset	Page 35 of 96