

TEST REPORT

FCC LTE B26(Part90) Test for SC-51F
Certification

APPLICANT
SAMSUNG Electronics Co., Ltd.

REPORT NO.
HCT-RF-2412-FC007

DATE OF ISSUE
December 3, 2024

Tested by
Jae Ryang Do



Technical Manager
Jong Seok Lee



HCT CO., LTD.
Bongjai Huh
BongJai Huh / CEO

**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Tel. +82 31 645 6300 Fax. +82 31 645 6401

TEST REPORT

REPORT NO.

HCT-RF-2412-FC007

DATE OF ISSUE

December 3, 2024

Additional Model

SCG31

Applicant**SAMSUNG Electronics Co., Ltd.**

129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Product Name

Mobile Phone

Model Name

SC-51F

Date of Test

October 10, 2024 ~ December 02, 2024

FCC ID

A3LSMS931D

Location of Test

☒ Permanent Testing Lab ☐ On Site Testing

(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

Test Standard Used

FCC Rule Part: § 90, § 22

Test Results

PASS

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	December 3, 2024	Initial Release

Notice

Content

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C. 853(a)

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked *.

Information provided by the applicant is marked **.

Test results provided by external providers are marked ***.

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

CONTENTS

1. GENERAL INFORMATION	6
1.1. MAXIMUM OUTPUT POWER.....	7
2. INTRODUCTION	8
2.1. DESCRIPTION OF EUT.....	8
2.2. MEASURING INSTRUMENT CALIBRATION	8
2.3. TEST FACILITY	8
3. DESCRIPTION OF TESTS	9
3.1 TEST PROCEDURE	9
3.2 CONDUCTED OUTPUT POWER.....	10
3.3 RADIATED POWER.....	11
3.4 RADIATED SPURIOUS EMISSIONS.....	12
3.5 OCCUPIED BANDWIDTH.....	13
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	14
3.7 CHANNEL EDGE	15
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	16
3.9 WORST CASE(RADIATED TEST)	17
3.10 WORST CASE(CONDUCTED TEST).....	18
4. LIST OF TEST EQUIPMENT	19
5. MEASUREMENT UNCERTAINTY.....	20
6. SUMMARY OF TEST RESULTS	21
7. SAMPLE CALCULATION	22
8. TEST DATA(Main 1 ANT).....	24
8.1 CONDUCTED OUTPUT POWER.....	24
8.2 EFFECTIVE RADIATED POWER.....	29
8.3 RADIATED SPURIOUS EMISSIONS.....	31
8.4 OCCUPIED BANDWIDTH.....	32
8.5 CONDUCTED SPURIOUS EMISSIONS	33
8.6 CHANNEL EDGE	33
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	34
8.8 STRADDLE CHANNEL	39
8.8.1 CONDUCTED OUTPUT POWER.....	39
8.8.2 EFFECTIVE RADIATED POWER.....	43
8.8.3 RADIATED SPURIOUS EMISSIONS.....	44
8.8.4 CONDUCTED SPURIOUS EMISSIONS	45
8.8.5 CHANNEL EDGE(Part90)	45
8.8.6 BAND EDGE(Part22).....	45
9. TEST DATA(Sub 1 ANT)	46
9.1 CONDUCTED OUTPUT POWER.....	46
9.2 EFFECTIVE RADIATED POWER.....	51
9.3 RADIATED SPURIOUS EMISSIONS.....	53
9.4 OCCUPIED BANDWIDTH.....	54
9.5 CONDUCTED SPURIOUS EMISSIONS	55
9.6 CHANNEL EDGE	55
9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	56
9.8 STRADDLE CHANNEL	61

9.8.1 CONDUCTED OUTPUT POWER.....	61
9.8.2 EFFECTIVE RADIATED POWER.....	65
9.8.3 RADIATED SPURIOUS EMISSIONS.....	66
9.8.4 CONDUCTED SPURIOUS EMISSIONS	67
9.8.5 CHANNEL EDGE(Part90)	67
9.8.6 BAND EDGE(Part22).....	67
10. TEST PLOTS(Main 1 ANT).....	68
11. TEST PLOTS (STRADDLE CHANNEL)	112
12. TEST PLOTS(Sub 1 ANT)	137
13. TEST PLOTS (STRADDLE CHANNEL)	181
14. ANNEX A_ TEST SETUP PHOTO	206

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMS931D
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§ 90, § 22
EUT Type:	Mobile phone
Model(s):	SC-51F
Additional Model(s)	SCG31
Tx Frequency:	814.7 MHz – 824.0 MHz (LTE – Band 26 (1.4 MHz)) 815.5 MHz – 824.0 MHz (LTE – Band 26 (3 MHz)) 816.5 MHz – 824.0 MHz (LTE – Band 26 (5 MHz)) 819.0 MHz – 824.0 MHz (LTE – Band 26 (10 MHz)) 821.5 MHz (LTE – Band 26 (15 MHz))
Date(s) of Tests:	October 10, 2024 ~ December 02, 2024
Serial number:	Radiated : R3CX90KCEGH Conducted : R3CX9061K4F

1.1. MAXIMUM OUTPUT POWER

Main 1 ANT

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	Conducted Output Power	
				Max. Power (W)	Max. Power (dBm)
LTE – Band26 (1.4)	814.7 – 824.0	1M10G7D	QPSK	0.265	24.23
		1M10W7D	16QAM	0.216	23.34
		1M10W7D	64QAM	0.186	22.70
LTE – Band26 (3)	815.5 – 824.0	2M72G7D	QPSK	0.257	24.10
		2M71W7D	16QAM	0.222	23.47
		2M71W7D	64QAM	0.175	22.44
LTE – Band26 (5)	816.5 – 824.0	4M52G7D	QPSK	0.261	24.17
		4M53W7D	16QAM	0.233	23.67
		4M51W7D	64QAM	0.170	22.31
LTE – Band26 (10)	819.0 – 824.0	9M05G7D	QPSK	0.257	24.10
		9M01W7D	16QAM	0.220	23.43
		9M00W7D	64QAM	0.175	22.44
LTE – Band26 (15)	821.5	13M5G7D	QPSK	0.259	24.13
		13M5W7D	16QAM	0.218	23.38
		13M5W7D	64QAM	0.173	22.39

Sub 1 ANT

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	Conducted Output Power	
				Max. Power (W)	Max. Power (dBm)
LTE – Band26 (1.4)	814.7 – 824.0	1M10G7D	QPSK	0.270	24.32
		1M10W7D	16QAM	0.230	23.62
		1M10W7D	64QAM	0.189	22.76
LTE – Band26 (3)	815.5 – 824.0	2M72G7D	QPSK	0.262	24.19
		2M72W7D	16QAM	0.225	23.52
		2M72W7D	64QAM	0.170	22.31
LTE – Band26 (5)	816.5 – 824.0	4M52G7D	QPSK	0.260	24.15
		4M51W7D	16QAM	0.220	23.42
		4M51W7D	64QAM	0.175	22.44
LTE – Band26 (10)	819.0 – 824.0	9M03G7D	QPSK	0.259	24.13
		9M05W7D	16QAM	0.223	23.48
		9M05W7D	64QAM	0.166	22.19
LTE – Band26 (15)	821.5	13M5G7D	QPSK	0.256	24.08
		13M5W7D	16QAM	0.215	23.32
		13M5W7D	64QAM	0.162	22.09

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub 6

It also supports IEEE 802.11 a/b/g/n/ac/ax/be (20/40/80/160/320 MHz), Bluetooth(iPA, ePA), BT LE(iPA, ePA), NFC, WPT, WIFI 6E.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Channel Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- KDB 971168 D01 v03r01 - Section 5.2.4 - ANSI C63.26-2015 - Section 5.2.1 & 5.2.4.2
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 CONDUCTED OUTPUT POWER

Test Overview


According to ANSI C63.26-2015 Section 5.2.1 when measuring the maximum RF output power from such devices, control over the EUT must be provided either through special test software (provided by manufacturer specifically for compliance testing, but not accessible by an end user) or through use of a base station emulator, communications test set, call box, or similar instrumentation that is capable of establishing a communications link with the EUT to enable control over variable parameters (e.g., output power, OBW, etc.).

In some cases, these instruments also include basic digital spectrum analyzer and/or power meter capabilities that can be utilized to measure the RF output power if the specified detectors and requirements can be realized and the measurement functions have been calibrated.

Test Procedure

1. The RF port of the EUT was connected to the Communication Tester via an RF cable.
2. Conducted average power was measured using a calibrated Radio Communication Tester.

Test setup

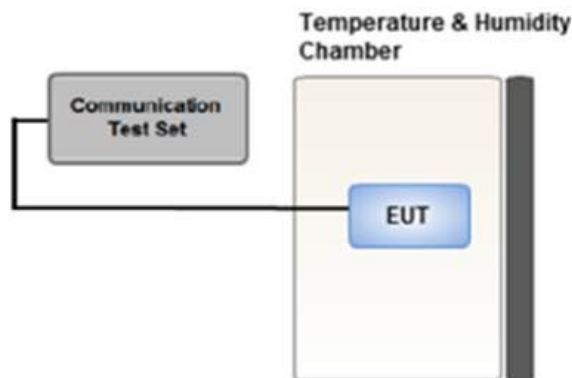

3.3 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW $\geq$ 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.4 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq$ 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $>$ 2 x span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin $>$ 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = \text{Pg}_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.5 OCCUPIED BANDWIDTH.

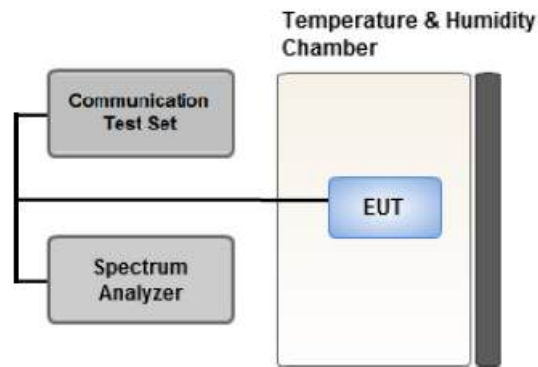

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.


The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW $\geq$ 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

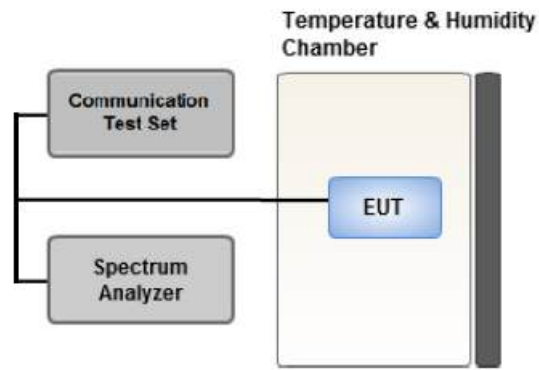

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep $\geq$ 2 x Span / RBW

3.7 CHANNEL EDGE

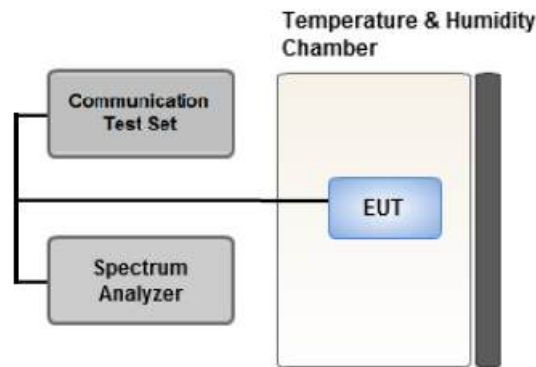

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings


1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW :
 - .- EA licensee's frequency block by up to and including 37.5 kHz : 300 Hz
 - .- EA licensee's frequency block greater than 37.5 kHz : 100 kHz
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes

For 90.691(a), RBW=300 Hz for offset less than 37.5 kHz from channel edge and RBW=100 kHz for offsets greater than 37.5 kHz is allowed.

Where Margin < 1 dB the emission level is either corrected by $10 \log(1 \text{ MHz} / \text{RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

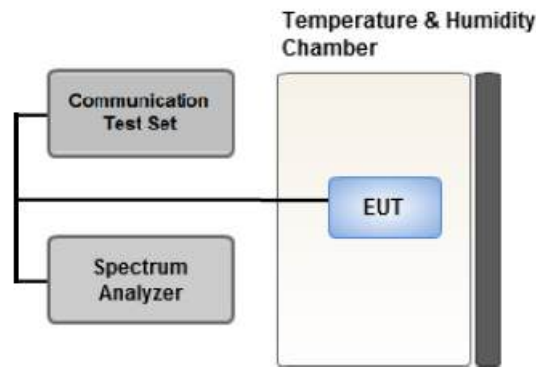

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

.- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

.- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature

(20 °C to provide a reference).

2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter.

Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)
Worst case : Stand alone
- All simultaneous transmission scenarios of operation were investigated, and the test results showed no additional significant emissions relative to the least restrictive limit were observed.
Therefore, only the worst case(stand-alone) results were reported.
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported. (Worst case : 15 MHz)
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- All modes of operation were tested and the worst case results are reported.
- Please refer to the table below.
- SC-51F & additional models were tested and the worst case results are reported.
(Worst case : SC-51F)

[Main 1 ANT Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	QPSK, 16QAM, 64QAM	See Section 8.1		Y
Radiated Spurious and Harmonic Emissions	QPSK	See Section 8.2		X

[Sub 1 ANT Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	QPSK, 16QAM, 64QAM	See Section 9.1		X
Radiated Spurious and Harmonic Emissions	QPSK	See Section 9.2		X

3.10 WORST CASE(CONDUCTED TEST)

- Worst case : Of all modulation, We have tested modulation of the high Conducted Output Power.
 - SC-51F & additional models were tested and the worst case results are reported.
- (Worst case : SC-51F)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM,	1.4, 3, 5	High	Full RB	0
	QPSK, 16QAM, 64QAM,	10, 15	Mid	Full RB	0
Channel Edge	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Mid	1	0
				1	49
		15	Mid	1	0
				1	74
		1.4, 3, 5	Low, High	Full RB	0
		10, 15	Mid	Full RB	0
Band Edge (Straddle Channel)	QPSK	1.4	Mid	1	5
		3	Mid	1	14
		5	Mid	1	24
		10	Mid	1	49
		1.4, 3, 5, 10	Mid	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5	Low, High	1	0
		10, 15	Mid	1	0

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacture	Serial No.	Due to Calibration	Calibration Interval
RF Switching System	Switch box(1.2 G HPF+LNA)	HCT CO., LTD.,	F1L1	11/11/2025	Annual
RF Switching System	Switch box(3.3 G HPF+LNA)	HCT CO., LTD.,	F1L2	11/11/2025	Annual
RF Switching System	Switch box(LNA)	HCT CO., LTD.,	F1L4	11/11/2025	Annual
RF Switching System	Switch box(6 G HPF+LNA)	HCT CO., LTD.,	F1L7	11/11/2025	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/17/2025	Annual
DC Power Supply	E3632A	Agilent	MY40010147	08/06/2025	Annual
Dipole Antenna	UHAP	Schwarzbeck	01274	03/10/2026	Biennial
Dipole Antenna	UHAP	Schwarzbeck	01288	08/07/2026	Biennial
Chamber	SU-642	ESPEC	93008124	02/19/2025	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/17/2025	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/11/2025	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/20/2026	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/19/2025	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/17/2025	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	08/06/2025	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/05/2025	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/07/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	08/28/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	08/19/2026	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262094331	11/13/2025	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6201026545	11/20/2025	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/26/2025	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/17/2025	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.98 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.52 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.66 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Channel Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 90.691	< 50 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions within 37.5 kHz of Block Edge	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 22.917(a)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§ 2.1046 § 90.635	< 100 Watts	PASS
Frequency stability / variation of ambient temperature	§ 2.1055, § 90.213 § 22.355	< 2.5 ppm	PASS

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§ 22.913(a)(5)	< 7 Watts max. ERP (Only 15 MHz B.W)	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 90.691 § 22.917(a)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW
GSM BW = 249 kHz
G = Phase Modulation
X = Cases not otherwise covered
W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W
GSM BW = 249 kHz
G = Phase Modulation
7 = Quantized/Digital Info
W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W
WCDMA BW = 4.17 MHz
F = Frequency Modulation
9 = Composite Digital Info
W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D
LTE BW = 4.48 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D
LTE BW = 4.48 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

8. TEST DATA(Main 1 ANT)

8.1 CONDUCTED OUTPUT POWER

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)				Limit (W)
				814.7 MHz		823.3 MHz		
				dBm	W	dBm	W	
1.4	QPSK	1	0	24.15	0.260	24.11	0.258	100
		1	3	24.23	0.265	24.11	0.258	100
		1	5	24.04	0.254	24.02	0.252	100
		3	0	24.08	0.256	24.02	0.253	100
		3	1	24.08	0.256	24.07	0.255	100
		3	3	24.06	0.255	23.98	0.250	100
		6	0	24.06	0.255	23.24	0.211	100
	16QAM	1	0	23.17	0.207	23.28	0.213	100
		1	3	23.23	0.210	23.34	0.216	100
		1	5	23.23	0.210	23.34	0.216	100
		3	0	23.27	0.212	23.29	0.213	100
		3	1	23.20	0.209	23.17	0.207	100
		3	3	23.26	0.212	23.21	0.209	100
		6	0	23.14	0.206	22.55	0.180	100
	64QAM	1	0	22.70	0.186	22.36	0.172	100
		1	3	22.18	0.165	22.27	0.168	100
		1	5	22.24	0.167	22.34	0.171	100
		3	0	22.46	0.176	22.31	0.170	100
		3	1	22.41	0.174	22.36	0.172	100
		3	3	22.24	0.167	22.20	0.166	100
		6	0	22.24	0.167	21.65	0.146	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)				Limit (W)
				815.5 MHz		822.5 MHz		
				dBm	W	dBm	W	
3	QPSK	1	0	24.03	0.253	23.96	0.249	100
		1	7	24.09	0.256	24.10	0.257	100
		1	14	24.03	0.253	24.07	0.255	100
		8	0	23.08	0.203	23.04	0.201	100
		8	3	23.15	0.207	23.10	0.204	100
		8	7	23.03	0.201	23.04	0.201	100
		15	0	23.11	0.205	23.06	0.202	100
	16QAM	1	0	23.31	0.214	23.47	0.222	100
		1	7	23.36	0.217	23.28	0.213	100
		1	14	23.42	0.220	23.34	0.216	100
		8	0	22.16	0.164	22.14	0.164	100
		8	3	22.19	0.166	22.19	0.166	100
		8	7	22.16	0.164	22.16	0.165	100
		15	0	22.12	0.163	22.08	0.161	100
	64QAM	1	0	22.39	0.173	22.34	0.171	100
		1	7	22.42	0.175	22.44	0.175	100
		1	14	22.32	0.171	22.38	0.173	100
		8	0	21.11	0.129	21.09	0.128	100
		8	3	21.15	0.130	21.10	0.129	100
		8	7	21.12	0.129	21.13	0.130	100
		15	0	21.11	0.129	21.10	0.129	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)				Limit (W)
				816.5 MHz		821.5 MHz		
				dBm	W	dBm	W	
5	QPSK	1	0	24.17	0.261	24.11	0.258	100
		1	12	24.12	0.258	24.10	0.257	100
		1	24	24.05	0.254	24.01	0.252	100
		12	0	23.04	0.201	23.02	0.200	100
		12	6	23.10	0.204	23.09	0.204	100
		12	11	23.12	0.205	23.13	0.206	100
		25	0	23.12	0.205	23.06	0.202	100
	16QAM	1	0	23.67	0.233	23.58	0.228	100
		1	12	23.61	0.230	23.59	0.228	100
		1	24	23.51	0.224	23.42	0.220	100
		12	0	22.16	0.164	22.14	0.164	100
		12	6	22.20	0.166	22.14	0.164	100
		12	11	22.12	0.163	22.14	0.163	100
		25	0	22.11	0.163	22.09	0.162	100
	64QAM	1	0	22.21	0.166	22.30	0.170	100
		1	12	22.26	0.168	22.31	0.170	100
		1	24	22.30	0.170	22.25	0.168	100
		12	0	21.06	0.128	21.07	0.128	100
		12	6	21.18	0.131	21.14	0.130	100
		12	11	21.12	0.129	21.14	0.130	100
		25	0	21.13	0.130	21.09	0.128	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				819 MHz		
				dBm	W	
10	QPSK	1	0	24.10	0.257	100
		1	24	24.05	0.254	100
		1	49	24.05	0.254	100
		25	0	23.05	0.202	100
		25	12	23.07	0.203	100
		25	24	23.09	0.203	100
		50	0	23.04	0.201	100
	16QAM	1	0	23.20	0.209	100
		1	24	23.43	0.220	100
		1	49	23.22	0.210	100
		25	0	22.02	0.159	100
		25	12	22.10	0.162	100
		25	24	22.15	0.164	100
		50	0	22.10	0.162	100
	64QAM	1	0	22.16	0.164	100
		1	24	22.44	0.176	100
		1	49	22.13	0.163	100
		25	0	21.03	0.127	100
		25	12	21.10	0.129	100
		25	24	21.14	0.130	100
		50	0	21.06	0.127	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				821.5 MHz		
				dBm	W	
15	QPSK	1	0	24.10	0.257	100
		1	36	24.13	0.259	100
		1	74	24.02	0.252	100
		36	0	23.07	0.203	100
		36	18	23.01	0.200	100
		36	39	23.01	0.200	100
		75	0	23.00	0.200	100
	16QAM	1	0	23.27	0.212	100
		1	36	23.38	0.218	100
		1	74	23.21	0.210	100
		36	0	22.06	0.161	100
		36	18	22.02	0.159	100
		36	39	22.06	0.161	100
		75	0	22.07	0.161	100
	64QAM	1	0	22.21	0.166	100
		1	36	22.39	0.173	100
		1	74	22.24	0.168	100
		36	0	21.07	0.128	100
		36	18	21.07	0.128	100
		36	39	21.06	0.128	100
		75	0	21.04	0.127	100

8.2 EFFECTIVE RADIATED POWER

Freq (MHz)	Bandwidth	Modulation	Measured	Substitute	Ant.	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)	Gain (dBd)				W	W	dBm	Size
814.7	LTE B26/ 1.4 MHz	QPSK	-34.05	28.36	-10.29	1.44	H	< 100	0.046	16.63	1	0
		16QAM	-34.66	27.75	-10.29	1.44	H		0.040	16.02		
		64QAM	-35.87	26.54	-10.29	1.44	H		0.030	14.81		
QPSK		-34.32	28.01	-10.25	1.44	H	0.043		16.32	1	0	
16QAM		-34.96	27.37	-10.25	1.44	H	0.037		15.68			
64QAM		-36.15	26.18	-10.25	1.44	H	0.028		14.49			
823.3												

Freq (MHz)	Bandwidth	Modulation	Measured	Substitute	Ant.	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)	Gain (dBd)				W	W	dBm	Size
815.5	LTE B26/ 3 MHz	QPSK	-34.01	28.39	-10.29	1.44	H	< 100	0.046	16.66	1	0
		16QAM	-34.68	27.72	-10.29	1.44	H		0.040	15.99		
		64QAM	-35.86	26.54	-10.29	1.44	H		0.030	14.81		
822.5		QPSK	-34.41	27.97	-10.25	1.44	H		0.043	16.28	1	0
		16QAM	-35.00	27.38	-10.25	1.44	H		0.037	15.69		
		64QAM	-36.17	26.21	-10.25	1.44	H		0.028	14.52		

Freq (MHz)	Bandwidth	Modulation	Measured	Substitute	Ant.	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)	Gain (dBd)				W	W	dBm	Size
816.5	LTE B26/ 5 MHz	QPSK	-34.04	28.31	-10.28	1.44	H	< 100	0.046	16.59	1	0
		16QAM	-34.74	27.61	-10.28	1.44	H		0.039	15.89		
		64QAM	-35.89	26.46	-10.28	1.44	H		0.030	14.74		
821.5		QPSK	-34.36	28.07	-10.26	1.44	H		0.043	16.37	1	0
		16QAM	-35.01	27.42	-10.26	1.44	H		0.037	15.72		
		64QAM	-36.12	26.31	-10.26	1.44	H		0.029	14.61		

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
								W	W	dBm	Size	Offset
819.0	LTE B26/ 10 MHz	QPSK	-34.14	28.28	-10.27	1.44	H	< 100	0.045	16.57	1	0
		16QAM	-34.92	27.50	-10.27	1.44	H		0.038	15.79		
		64QAM	-36.01	26.41	-10.27	1.44	H		0.030	14.70		

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
								W	W	dBm	Size	Offset
821.5	LTE B26/ 15 MHz	QPSK	-34.06	28.37	-10.26	1.44	H	< 7.00	0.047	16.67	1	0
		16QAM	-34.92	27.51	-10.26	1.44	H		0.038	15.81		
		64QAM	-36.04	26.39	-10.26	1.44	H		0.029	14.69		

Note

1. Limit: None (for reporting purposes only)

8.3 RADIATED SPURIOUS EMISSIONS

- ☐ MODE: LTE B26
☐ MODULATION SIGNAL: 15 MHz QPSK
☐ DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit	RB	
									Size	Offset
26765 (821.5)	1 643.00	-44.68	9.56	-60.14	2.00	H	-52.58	-13.00	1	0
	2 464.50	-44.80	10.21	-56.06	2.59	H	-48.44	-13.00		
	3 286.00	-46.62	12.05	-55.82	2.95	V	-46.72	-13.00		

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
Band 26	1.4 MHz	823.3	QPSK	6	0	1.1016
			16QAM			1.1022
			64QAM			1.0971
	3 MHz	822.5	QPSK	15		2.7146
			16QAM			2.7120
			64QAM			2.7127
	5 MHz	821.5	QPSK	25		4.5202
			16QAM			4.5298
			64QAM			4.5140
	10 MHz	819.0	QPSK	50		9.0537
			16QAM			9.0082
			64QAM			8.9973
	15 MHz	821.5	QPSK	75		13.511
			16QAM			13.476
			64QAM			13.494

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 69 ~ 83.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
26	1.4	814.7	3.6935	27.976	-67.029	-39.053	-13.00
		823.3	3.6850	27.976	-66.645	-38.669	
	3	815.5	3.6980	27.976	-67.187	-39.211	
		822.5	3.6930	27.976	-67.282	-39.306	
	5	816.5	3.7059	27.976	-67.271	-39.295	
		821.5	3.7049	27.976	-67.183	-39.207	
	10	819.0	3.7044	27.976	-67.140	-39.164	
	15	821.5	3.7129	27.976	-67.234	-39.258	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 104 ~ 111.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Ext. Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


8.6 CHANNEL EDGE

- Plots of the EUT's Band Edge are shown Page 84 ~ 103.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


MODE:	<u>LTE 26</u>
OPERATING FREQUENCY:	<u>814,700,000 Hz</u>
CHANNEL:	<u>26697(1.4 MHz)</u>
REFERENCE VOLTAGE:	<u>3.880 VDC</u>
DEVIATION LIMIT:	<u>± 0.000 25 % or 2.5 ppm</u>

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	814 700 004	0.0	0.000 000	0.000
100 %		-30	814 700 009	4.5	0.000 001	0.006
100 %		-20	814 700 009	4.9	0.000 001	0.006
100 %		-10	814 700 009	5.0	0.000 001	0.006
100 %		0	814 700 008	4.2	0.000 001	0.005
100 %		+10	814 700 011	6.4	0.000 001	0.008
100 %		+30	814 700 009	5.2	0.000 001	0.006
100 %		+40	814 699 997	-6.8	-0.000 001	-0.008
100 %		+50	814 699 998	-6.5	-0.000 001	-0.008
Batt. Endpoint	3.300	+20	814 700 009	4.8	0.000 001	0.006

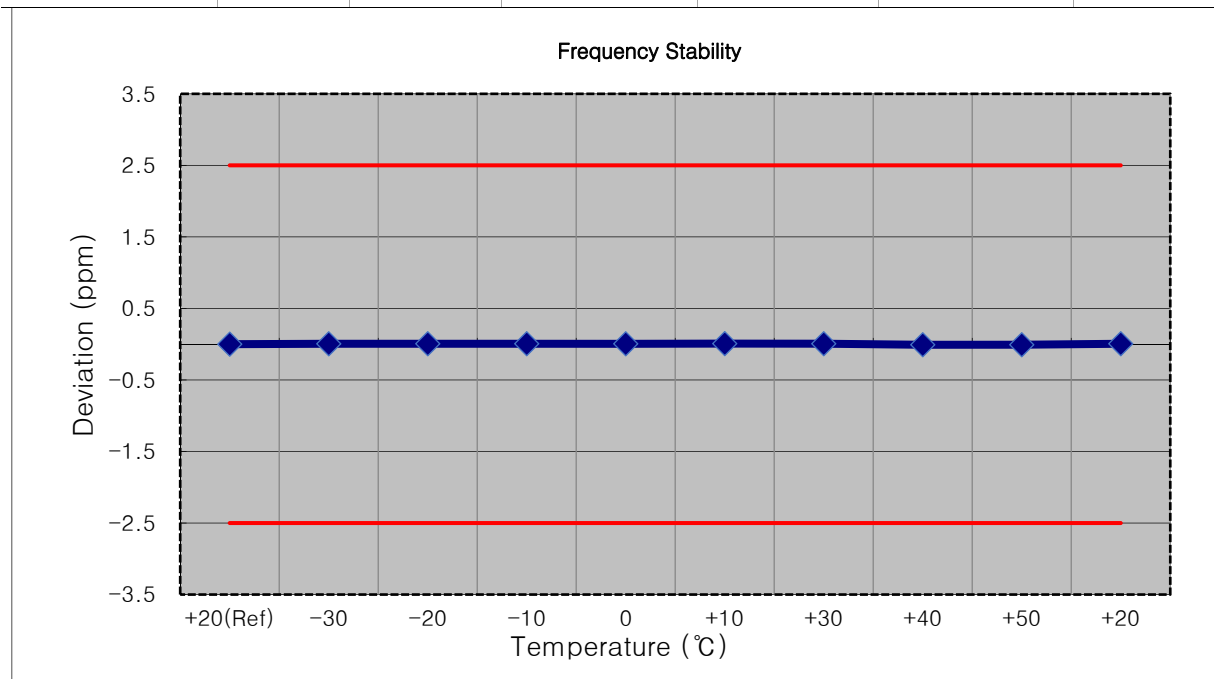


MODE:	<u>LTE 26</u>
OPERATING FREQUENCY:	<u>815,500,000 Hz</u>
CHANNEL:	<u>26705(3 MHz)</u>
REFERENCE VOLTAGE:	<u>3.880 VDC</u>
DEVIATION LIMIT:	<u>± 0.000 25 % or 2.5 ppm</u>

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.880	+20(Ref)	815 500 017	0.0	0.000 000	0.000
100 %		-30	815 500 003	-14.3	-0.000 002	-0.018
100 %		-20	815 500 026	8.5	0.000 001	0.010
100 %		-10	815 500 000	-17.3	-0.000 002	-0.021
100 %		0	815 500 004	-13.2	-0.000 002	-0.016
100 %		+10	815 500 005	-12.2	-0.000 001	-0.015
100 %		+30	815 500 003	-13.9	-0.000 002	-0.017
100 %		+40	815 500 028	11.0	0.000 001	0.013
100 %		+50	815 500 027	9.5	0.000 001	0.012
Batt. Endpoint	3.300	+20	815 500 029	11.5	0.000 001	0.014

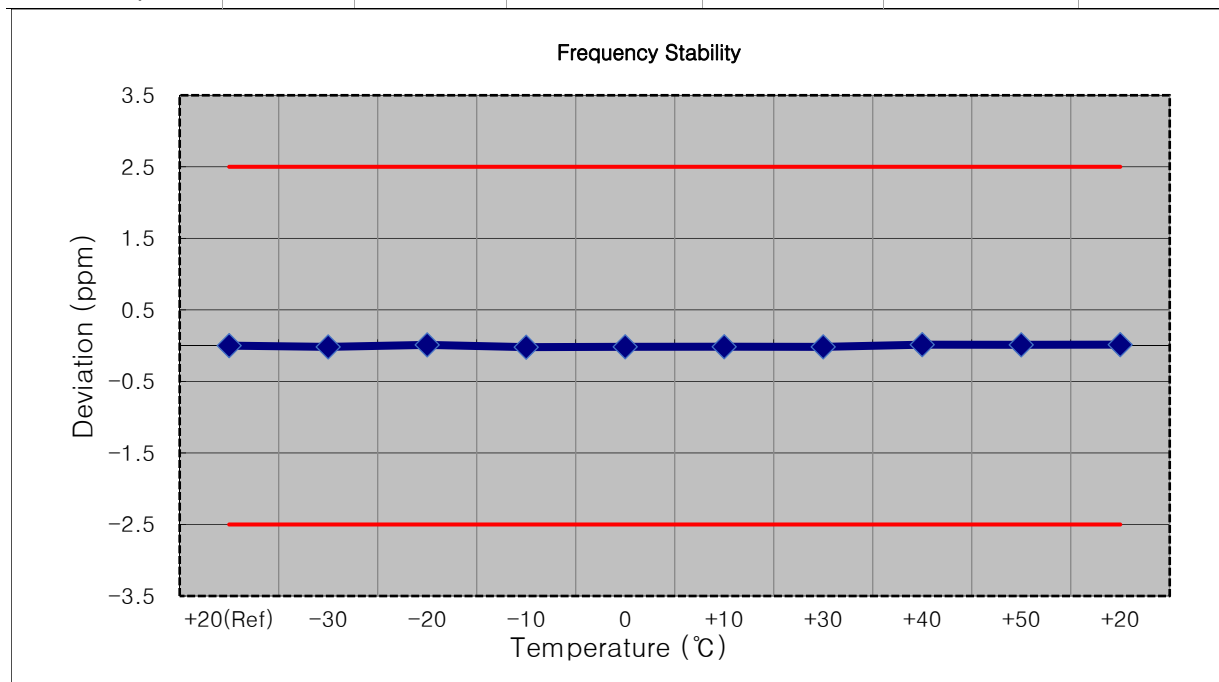


MODE:	<u>LTE 26</u>
OPERATING FREQUENCY:	<u>816,500,000 Hz</u>
CHANNEL:	<u>26715(5 MHz)</u>
REFERENCE VOLTAGE:	<u>3.880 VDC</u>
DEVIATION LIMIT:	<u>± 0.000 25 % or 2.5 ppm</u>

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.880	+20(Ref)	816 499 996	0.0	0.000 000	0.000
100 %		-30	816 499 999	2.8	0.000 000	0.003
100 %		-20	816 499 992	-3.8	0.000 000	-0.005
100 %		-10	816 500 000	4.0	0.000 000	0.005
100 %		0	816 500 001	4.6	0.000 001	0.006
100 %		+10	816 500 001	4.8	0.000 001	0.006
100 %		+30	816 500 000	4.0	0.000 000	0.005
100 %		+40	816 499 991	-4.9	-0.000 001	-0.006
100 %		+50	816 499 993	-2.9	0.000 000	-0.004
Batt. Endpoint	3.300	+20	816 499 992	-3.8	0.000 000	-0.005

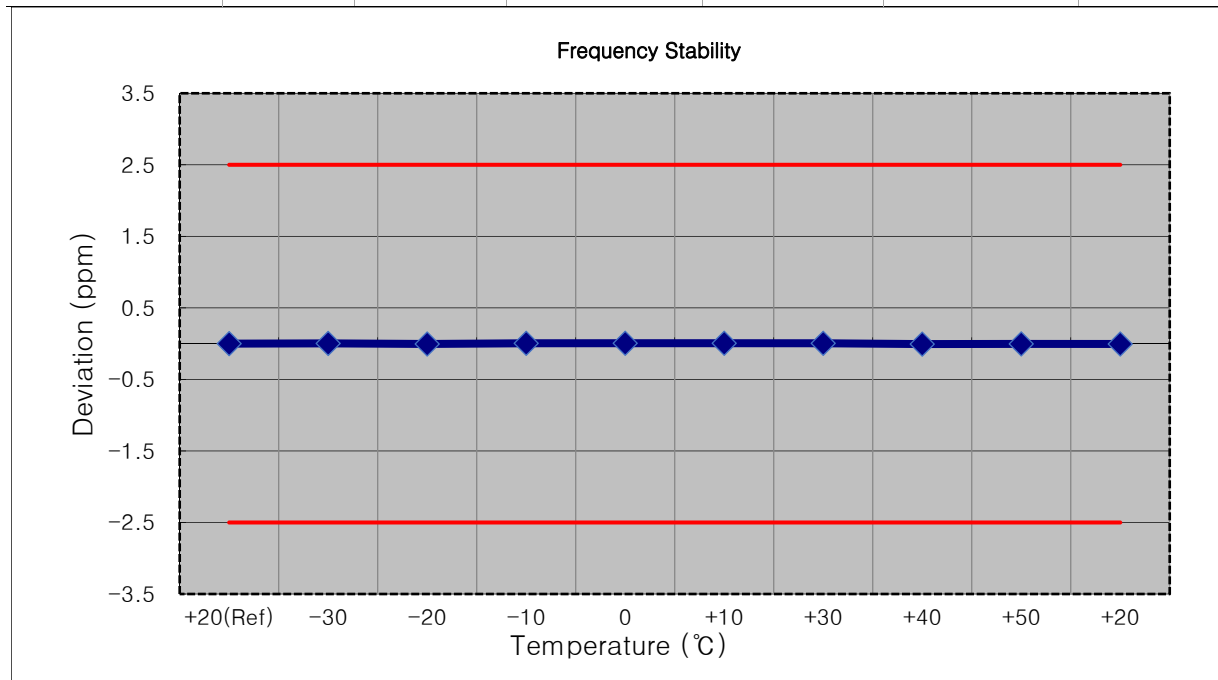


MODE:	<u>LTE 26</u>
OPERATING FREQUENCY:	<u>819,000,000 Hz</u>
CHANNEL:	<u>26740(10 MHz)</u>
REFERENCE VOLTAGE:	<u>3.880 VDC</u>
DEVIATION LIMIT:	<u>± 0.000 25 % or 2.5 ppm</u>

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.880	+20(Ref)	818 999 991	0.0	0.000 000	0.000
100 %		-30	818 999 986	-5.2	-0.000 001	-0.006
100 %		-20	818 999 985	-6.2	-0.000 001	-0.008
100 %		-10	818 999 985	-6.2	-0.000 001	-0.008
100 %		0	818 999 986	-5.7	-0.000 001	-0.007
100 %		+10	818 999 987	-4.1	-0.000 001	-0.005
100 %		+30	818 999 984	-7.2	-0.000 001	-0.009
100 %		+40	818 999 983	-7.8	-0.000 001	-0.010
100 %		+50	818 999 985	-6.4	-0.000 001	-0.008
Batt. Endpoint	3.300	+20	818 999 987	-4.0	0.000 000	-0.005

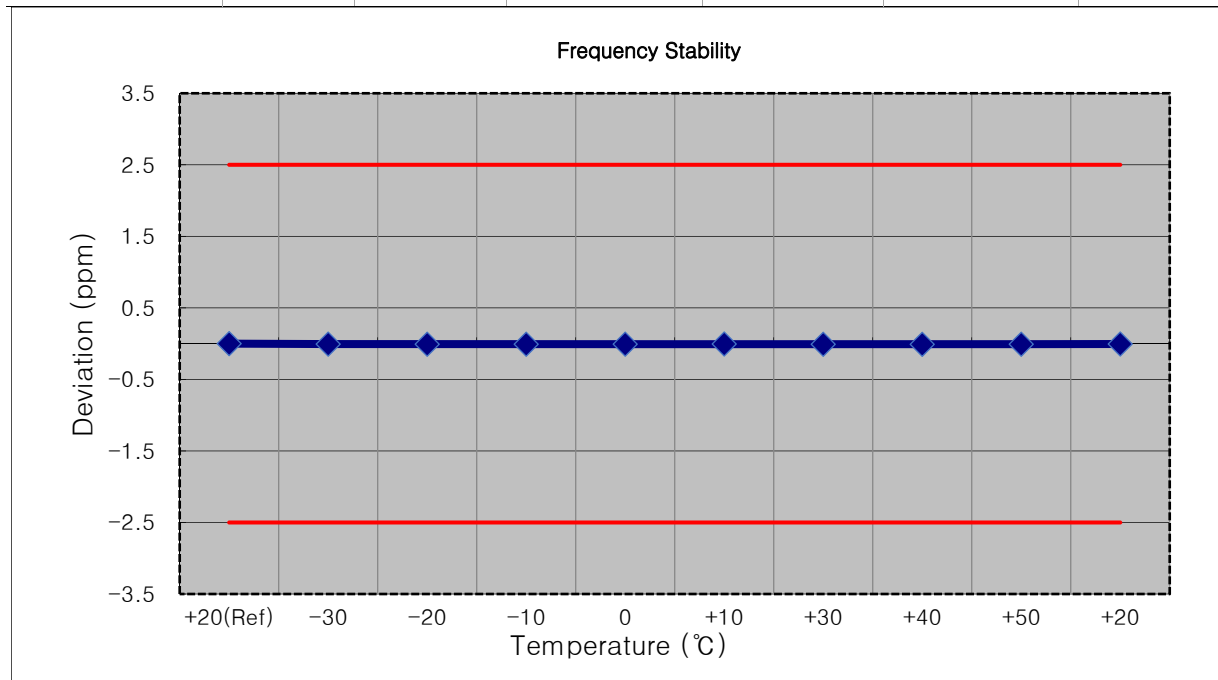

MODE:	<u>LTE 26</u>
OPERATING FREQUENCY:	<u>821,500,000 Hz</u>
CHANNEL:	<u>26765(15 MHz)</u>
REFERENCE VOLTAGE:	<u>3.880 VDC</u>
DEVIATION LIMIT:	$\pm 0.000\ 25\ \%$ or 2.5 ppm

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.880	+20(Ref)	821 499 991	0.0	0.000 000	0.000
100 %		-30	821 499 982	-9.2	-0.000 001	-0.011
100 %		-20	821 499 981	-10.2	-0.000 001	-0.012
100 %		-10	821 499 984	-7.0	-0.000 001	-0.009
100 %		0	821 499 984	-6.8	-0.000 001	-0.008
100 %		+10	821 499 981	-10.5	-0.000 001	-0.013
100 %		+30	821 499 979	-12.0	-0.000 001	-0.015
100 %		+40	821 499 982	-9.1	-0.000 001	-0.011
100 %		+50	821 499 982	-8.8	-0.000 001	-0.011
Batt. Endpoint	3.300	+20	821 499 980	-11.1	-0.000 001	-0.014

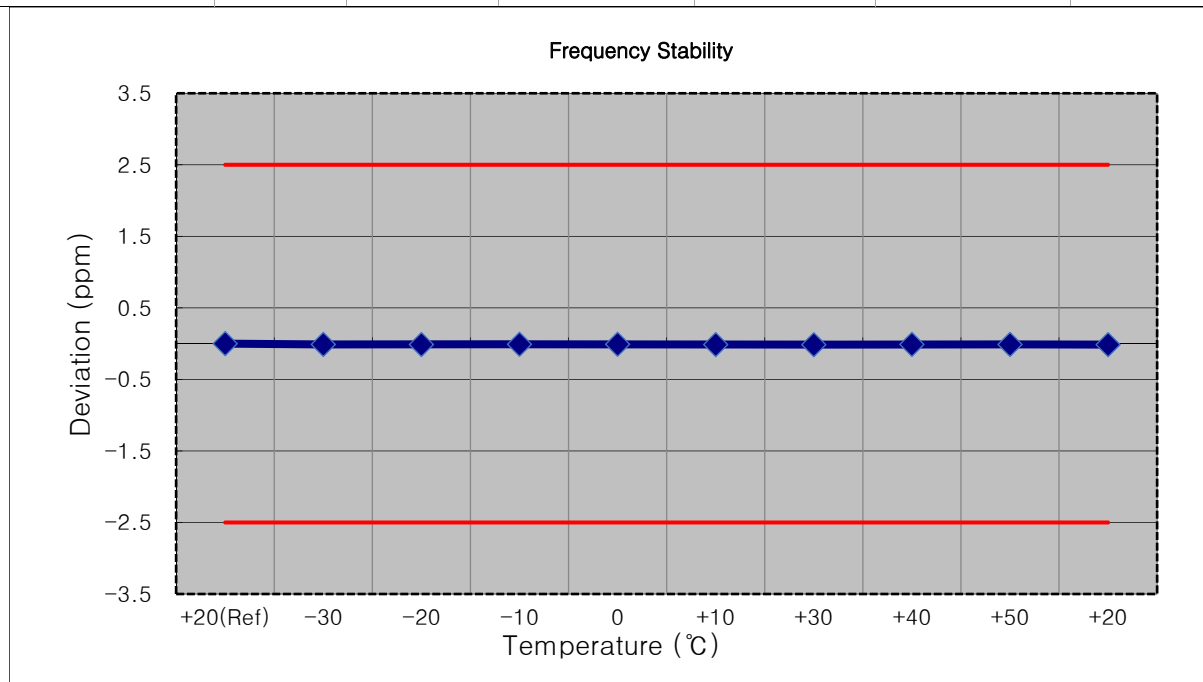

8.8 STRADDLE CHANNEL

8.8.1 CONDUCTED OUTPUT POWER

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824 MHz		
				dBm	W	
1.4	QPSK	1	0	23.96	0.249	100
		1	3	23.92	0.247	100
		1	5	23.90	0.245	100
		3	0	23.92	0.246	100
		3	1	23.94	0.248	100
		3	3	23.88	0.244	100
		6	0	22.90	0.195	100
	16QAM	1	0	23.21	0.209	100
		1	3	23.22	0.210	100
		1	5	23.21	0.209	100
		3	0	23.19	0.208	100
		3	1	23.05	0.202	100
		3	3	23.15	0.207	100
		6	0	22.28	0.169	100
	64QAM	1	0	22.65	0.184	100
		1	3	22.50	0.178	100
		1	5	22.49	0.177	100
		3	0	22.49	0.177	100
		3	1	22.50	0.178	100
		3	3	22.41	0.174	100
		6	0	21.72	0.149	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824 MHz		
				dBm	W	
3	QPSK	1	0	23.94	0.248	100
		1	7	24.04	0.254	100
		1	14	24.00	0.251	100
		8	0	22.96	0.198	100
		8	3	23.03	0.201	100
		8	7	22.98	0.199	100
		15	0	22.99	0.199	100
	16QAM	1	0	23.38	0.218	100
		1	7	23.24	0.211	100
		1	14	23.34	0.216	100
		8	0	22.08	0.162	100
		8	3	22.09	0.162	100
		8	7	22.13	0.163	100
		15	0	22.01	0.159	100
	64QAM	1	0	22.20	0.166	100
		1	7	22.34	0.171	100
		1	14	22.29	0.170	100
		8	0	21.02	0.126	100
		8	3	21.06	0.128	100
		8	7	21.07	0.128	100
		15	0	21.03	0.127	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824 MHz		
				dBm	W	
5	QPSK	1	0	24.10	0.257	100
		1	12	24.07	0.255	100
		1	24	23.97	0.249	100
		12	0	23.00	0.200	100
		12	6	23.05	0.202	100
		12	11	23.09	0.204	100
		25	0	23.03	0.201	100
	16QAM	1	0	23.55	0.226	100
		1	12	23.42	0.220	100
		1	24	23.37	0.217	100
		12	0	22.09	0.162	100
		12	6	22.08	0.162	100
		12	11	22.08	0.161	100
		25	0	22.07	0.161	100
	64QAM	1	0	22.26	0.168	100
		1	12	22.28	0.169	100
		1	24	22.20	0.166	100
		12	0	21.00	0.126	100
		12	6	21.07	0.128	100
		12	11	21.09	0.128	100
		25	0	21.06	0.128	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824 MHz		
				dBm	W	
10	QPSK	1	0	24.08	0.256	100
		1	24	24.04	0.254	100
		1	49	24.03	0.253	100
		25	0	23.02	0.200	100
		25	12	23.06	0.202	100
		25	24	23.05	0.202	100
		50	0	23.03	0.201	100
	16QAM	1	0	23.22	0.210	100
		1	24	23.39	0.218	100
		1	49	23.20	0.209	100
		25	0	22.01	0.159	100
		25	12	22.06	0.161	100
		25	24	22.09	0.162	100
		50	0	22.08	0.161	100
	64QAM	1	0	22.12	0.163	100
		1	24	22.36	0.172	100
		1	49	22.10	0.162	100
		25	0	20.98	0.125	100
		25	12	21.09	0.129	100
		25	24	21.09	0.129	100
		50	0	21.05	0.127	100

8.8.2 EFFECTIVE RADIATED POWER

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
								W	W	dBm	Size	Offset
824.0	LTE B26/ 1.4 MHz	QPSK	-34.56	27.74	-10.24	1.44	H	< 7.00	0.040	16.06	1	0
		16QAM	-35.13	27.17	-10.24	1.44	H		0.035	15.49		
		64QAM	-36.35	25.95	-10.24	1.44	H		0.027	14.27		

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
								W	W	dBm	Size	Offset
824.0	LTE B26/ 3 MHz	QPSK	-34.11	28.19	-10.24	1.44	H	< 7.00	0.045	16.51	1	0
		16QAM	-34.77	27.53	-10.24	1.44	H		0.039	15.85		
		64QAM	-35.94	26.36	-10.24	1.44	H		0.029	14.68		

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
								W	W	dBm	Size	Offset
824.0	LTE B26/ 5 MHz	QPSK	-34.06	28.24	-10.24	1.44	H	< 7.00	0.045	16.56	1	0
		16QAM	-34.97	27.33	-10.24	1.44	H		0.037	15.65		
		64QAM	-35.92	26.38	-10.24	1.44	H		0.030	14.70		

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
								W	W	dBm	Size	Offset
824.0	LTE B26/ 10 MHz	QPSK	-34.02	28.28	-10.24	1.44	H	< 7.00	0.046	16.60	1	0
		16QAM	-34.81	27.49	-10.24	1.44	H		0.038	15.81		
		64QAM	-35.95	26.35	-10.24	1.44	H		0.029	14.67		

8.8.3 RADIATED SPURIOUS EMISSIONS

- ▣ MODE: LTE B26(Straddle)
- ▣ MODULATION SIGNAL: 3 MHz QPSK
- ▣ DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit	RB	
									Size	Offset
26790 (824.0)	1 648.00	-44.70	9.58	-60.29	2.02	H	-52.73	-13.00	1	0
	2 472.00	-44.99	10.26	-56.34	2.59	H	-48.67	-13.00		
	3 296.00	-47.27	12.13	-56.46	2.95	H	-47.28	-13.00		

8.8.4 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
26	824.0	824.0	3.6885	27.976	-67.306	-39.330	-13.00
	824.0		3.6970	27.976	-67.247	-39.271	
	824.0		3.7084	27.976	-66.869	-38.893	
	824.0		3.7005	27.976	-67.276	-39.300	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 113 ~ 116.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131

8.8.5 CHANNEL EDGE(Part90)

- Test Channel : 26790(824.0MHz)
- Plots of the EUT's Band Edge are shown Page 117 ~ 128.

8.8.6 BAND EDGE(Part22)

- Test Channel : 26790(824.0 MHz)
- Plots of the EUT's Band Edge are shown Page 129 ~ 136.

9. TEST DATA(Sub 1 ANT)

9.1 CONDUCTED OUTPUT POWER

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)				Limit (W)
				814.7 MHz		823.3 MHz		
				dBm	W	dBm	W	
1.4	QPSK	1	0	24.32	0.270	24.12	0.258	100
		1	3	24.28	0.268	24.11	0.257	100
		1	5	23.90	0.245	23.86	0.244	100
		3	0	23.92	0.247	23.89	0.245	100
		3	1	23.99	0.251	23.88	0.244	100
		3	3	24.03	0.253	23.94	0.247	100
		6	0	22.38	0.173	22.32	0.171	100
	16QAM	1	0	23.62	0.230	23.38	0.218	100
		1	3	23.31	0.214	23.34	0.216	100
		1	5	23.56	0.227	23.36	0.217	100
		3	0	23.51	0.224	23.32	0.215	100
		3	1	23.08	0.203	23.06	0.202	100
		3	3	23.09	0.204	23.09	0.203	100
		6	0	22.04	0.160	22.03	0.159	100
	64QAM	1	0	22.76	0.189	22.66	0.185	100
		1	3	22.07	0.161	22.09	0.162	100
		1	5	22.25	0.168	22.40	0.174	100
		3	0	22.21	0.166	22.29	0.169	100
		3	1	22.05	0.160	22.13	0.163	100
		3	3	22.17	0.165	22.13	0.163	100
		6	0	20.97	0.125	20.90	0.123	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)				Limit (W)
				815.5 MHz		822.5 MHz		
				dBm	W	dBm	W	
3	QPSK	1	0	24.06	0.255	24.05	0.254	100
		1	7	23.98	0.250	23.91	0.246	100
		1	14	24.19	0.262	23.95	0.248	100
		8	0	22.99	0.199	22.91	0.195	100
		8	3	22.99	0.199	22.95	0.197	100
		8	7	22.97	0.198	22.91	0.196	100
		15	0	22.96	0.198	22.90	0.195	100
	16QAM	1	0	23.23	0.210	23.23	0.211	100
		1	7	23.52	0.225	23.34	0.216	100
		1	14	23.25	0.211	23.30	0.214	100
		8	0	22.08	0.161	21.97	0.157	100
		8	3	22.07	0.161	21.97	0.158	100
		8	7	22.04	0.160	21.97	0.157	100
		15	0	22.01	0.159	21.94	0.156	100
	64QAM	1	0	22.31	0.170	22.18	0.165	100
		1	7	22.25	0.168	22.27	0.168	100
		1	14	22.22	0.167	22.07	0.161	100
		8	0	21.15	0.130	20.99	0.126	100
		8	3	21.09	0.129	21.03	0.127	100
		8	7	20.97	0.125	20.92	0.124	100
		15	0	21.05	0.127	20.96	0.125	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)				Limit (W)
				816.5 MHz		821.5 MHz		
				dBm	W	dBm	W	
5	QPSK	1	0	24.15	0.260	24.02	0.253	100
		1	12	23.95	0.248	23.95	0.248	100
		1	24	23.86	0.243	23.88	0.244	100
		12	0	23.09	0.204	22.95	0.197	100
		12	6	23.07	0.203	23.01	0.200	100
		12	11	23.01	0.200	22.93	0.196	100
		25	0	23.00	0.200	22.94	0.197	100
	16QAM	1	0	23.42	0.220	23.42	0.220	100
		1	12	23.17	0.207	23.23	0.211	100
		1	24	23.24	0.211	23.20	0.209	100
		12	0	22.04	0.160	21.96	0.157	100
		12	6	22.13	0.163	22.05	0.160	100
		12	11	22.05	0.160	22.01	0.159	100
		25	0	22.03	0.160	21.97	0.157	100
	64QAM	1	0	22.44	0.175	22.29	0.169	100
		1	12	22.34	0.171	22.20	0.166	100
		1	24	22.05	0.160	22.04	0.160	100
		12	0	21.07	0.128	20.97	0.125	100
		12	6	21.14	0.130	21.04	0.127	100
		12	11	21.04	0.127	20.95	0.124	100
		25	0	21.03	0.127	20.95	0.125	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				819 MHz		
				dBm	W	
10	QPSK	1	0	24.13	0.259	100
		1	24	24.09	0.256	100
		1	49	23.99	0.251	100
		25	0	22.90	0.195	100
		25	12	22.94	0.197	100
		25	24	22.93	0.196	100
		50	0	22.91	0.196	100
	16QAM	1	0	23.24	0.211	100
		1	24	23.26	0.212	100
		1	49	23.48	0.223	100
		25	0	21.91	0.155	100
		25	12	21.99	0.158	100
		25	24	21.91	0.155	100
		50	0	21.97	0.157	100
	64QAM	1	0	22.19	0.166	100
		1	24	22.07	0.161	100
		1	49	22.11	0.162	100
		25	0	20.97	0.125	100
		25	12	20.94	0.124	100
		25	24	20.91	0.123	100
		50	0	20.93	0.124	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				821.5 MHz		
				dBm	W	
15	QPSK	1	0	23.84	0.242	100
		1	36	24.08	0.256	100
		1	74	23.86	0.243	100
		36	0	22.86	0.193	100
		36	18	22.91	0.195	100
		36	39	22.86	0.193	100
		75	0	22.85	0.193	100
	16QAM	1	0	23.02	0.201	100
		1	36	23.32	0.215	100
		1	74	23.01	0.200	100
		36	0	21.88	0.154	100
		36	18	21.95	0.157	100
		36	39	21.83	0.152	100
		75	0	21.90	0.155	100
	64QAM	1	0	22.02	0.159	100
		1	36	22.09	0.162	100
		1	74	21.91	0.155	100
		36	0	20.89	0.123	100
		36	18	20.89	0.123	100
		36	39	20.87	0.122	100
		75	0	20.90	0.123	100

9.2 EFFECTIVE RADIATED POWER

Freq (MHz)	Bandwidth	Modulation	Measured	Substitute	Ant.	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)	Gain (dBd)				W	W	dBm	Size
814.7	LTE B26/ 1.4 MHz	QPSK	-31.35	31.06	-10.29	1.44	H	< 100	0.086	19.33	1	5
		16QAM	-31.87	30.54	-10.29	1.44	H		0.076	18.81		
		64QAM	-33.06	29.35	-10.29	1.44	H		0.058	17.62		
QPSK		-30.85	31.48	-10.25	1.44	H	0.095		19.79	1	5	
16QAM		-31.35	30.98	-10.25	1.44	H	0.085		19.29			
64QAM		-32.54	29.79	-10.25	1.44	H	0.065		18.10			
823.3												

Freq (MHz)	Bandwidth	Modulation	Measured	Substitute	Ant.	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)	Gain (dBd)				W	W	dBm	Size
815.5	LTE B26/ 3 MHz	QPSK	-31.18	31.22	-10.29	1.44	H	< 100	0.089	19.49	1	14
		16QAM	-31.74	30.66	-10.29	1.44	H		0.078	18.93		
		64QAM	-32.90	29.50	-10.29	1.44	H		0.060	17.77		
QPSK		-30.77	31.61	-10.25	1.44	H	0.098		19.92	1	14	
16QAM		-31.45	30.93	-10.25	1.44	H	0.084		19.24			
64QAM		-32.55	29.83	-10.25	1.44	H	0.065		18.14			
822.5												

Freq (MHz)	Bandwidth	Modulation	Measured	Substitute	Ant.	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)	Gain (dBd)			W	W	dBm	Size	Offset
816.5	LTE B26/ 5 MHz	QPSK	-31.12	31.23	-10.28	1.44	H	< 100	0.089	19.51	1	24
		16QAM	-31.61	30.74	-10.28	1.44	H		0.080	19.02		
		64QAM	-32.81	29.54	-10.28	1.44	H		0.061	17.82		
QPSK		-30.78	31.65	-10.26	1.44	H	0.099		19.95	1	24	
16QAM		-31.40	31.03	-10.26	1.44	H	0.086		19.33			
64QAM		-32.61	29.82	-10.26	1.44	H	0.065		18.12			
821.5												

Freq (MHz)	Bandwidth	Modulation	Measured	Substitute	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
819.0	LTE B26/ 10 MHz	QPSK	-30.82	31.60	-10.27	1.44	H	< 100	0.098	19.89	1	49
		16QAM	-31.46	30.96	-10.27	1.44	H		0.084	19.25		
		64QAM	-32.66	29.76	-10.27	1.44	H		0.064	18.05		

Freq (MHz)	Bandwidth	Modulation	Measured	Substitute	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
821.5	LTE B26/ 15 MHz	QPSK	-30.58	31.85	-10.26	1.44	H	< 7.00	0.104	20.15	1	74
		16QAM	-31.48	30.95	-10.26	1.44	H		0.084	19.25		
		64QAM	-32.52	29.91	-10.26	1.44	H		0.066	18.21		

Note

1. Limit: None (for reporting purposes only)

9.3 RADIATED SPURIOUS EMISSIONS

- ▣ MODE: LTE B26
- ▣ MODULATION SIGNAL: 15 MHz QPSK
- ▣ DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit	RB	
									Size	Offset
26765 (821.5)	1 643.00	-44.08	9.56	-59.54	2.00	H	-51.98	-13.00	1	74
	2 464.50	-42.53	10.21	-53.79	2.59	V	-46.17	-13.00		
	3 286.00	-48.61	12.05	-57.81	2.95	H	-48.71	-13.00		

9.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
Band 26	1.4 MHz	823.3	QPSK	6	0	1.0977
			16QAM			1.0985
			64QAM			1.0975
	3 MHz	822.5	QPSK	15		2.7173
			16QAM			2.7221
			64QAM			2.7147
	5 MHz	821.5	QPSK	25		4.5154
			16QAM			4.5051
			64QAM			4.5118
	10 MHz	819.0	QPSK	50		9.0317
			16QAM			9.0458
			64QAM			9.0456
	15 MHz	821.5	QPSK	75		13.493
			16QAM			13.527
			64QAM			13.510

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 138 ~ 152.

9.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
26	1.4	814.7	3.7084	27.976	-67.411	-39.435	-13.00
		823.3	3.6830	27.976	-67.282	-39.306	
	3	815.5	3.6810	27.976	-67.056	-39.080	
		822.5	3.7119	27.976	-67.055	-39.079	
	5	816.5	3.6835	27.976	-67.219	-39.243	
		821.5	3.7005	27.976	-67.001	-39.025	
	10	819.0	3.7129	27.976	-67.432	-39.456	
	15	821.5	3.7114	27.976	-67.205	-39.229	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 173 ~ 180.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Ext. Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


9.6 CHANNEL EDGE

- Plots of the EUT's Band Edge are shown Page 153 ~ 172.

9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


MODE:	<u>LTE 26</u>
OPERATING FREQUENCY:	<u>814,700,000 Hz</u>
CHANNEL:	<u>26697(1.4 MHz)</u>
REFERENCE VOLTAGE:	<u>3.880 VDC</u>
DEVIATION LIMIT:	<u>± 0.000 25 % or 2.5 ppm</u>

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	814 699 987	0.0	0.000 000	0.000
100 %		-30	814 699 979	-8.0	-0.000 001	-0.010
100 %		-20	814 699 994	7.2	0.000 001	0.009
100 %		-10	814 699 981	-5.3	-0.000 001	-0.007
100 %		0	814 699 982	-4.1	-0.000 001	-0.005
100 %		+10	814 699 978	-8.4	-0.000 001	-0.010
100 %		+30	814 699 978	-8.1	-0.000 001	-0.010
100 %		+40	814 699 982	-4.4	-0.000 001	-0.005
100 %		+50	814 699 994	7.9	0.000 001	0.010
Batt. Endpoint	3.300	+20	814 699 980	-6.2	-0.000 001	-0.008

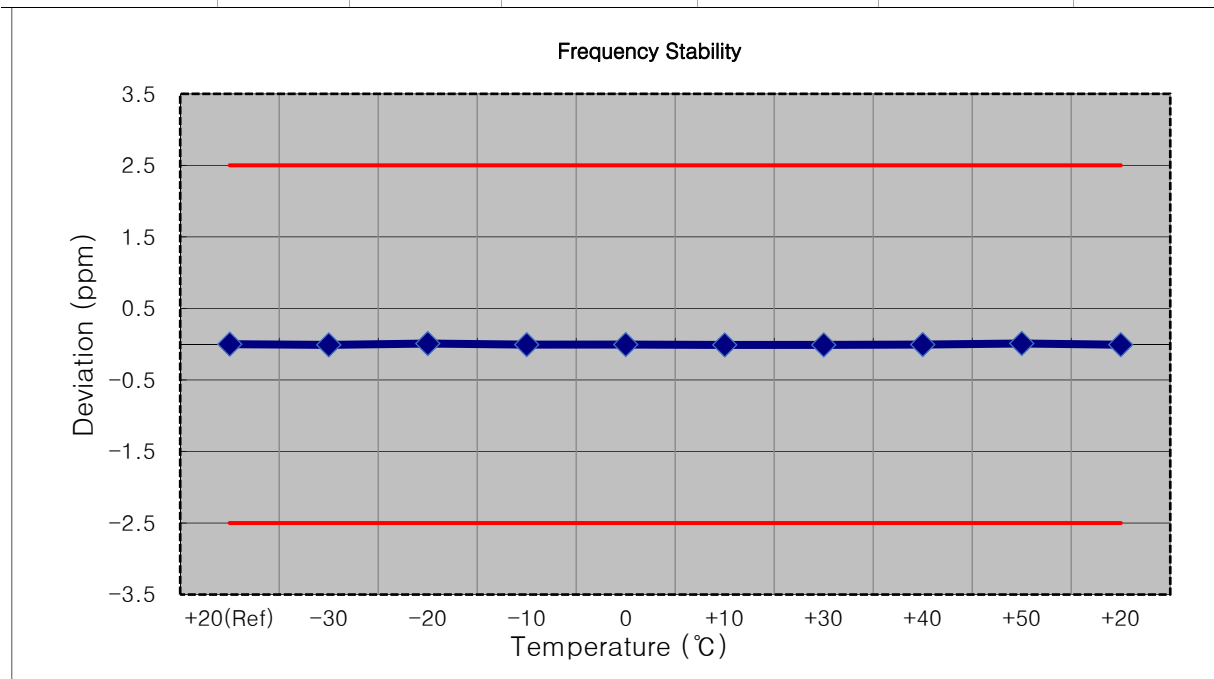


MODE:	<u>LTE 26</u>
OPERATING FREQUENCY:	<u>815,500,000 Hz</u>
CHANNEL:	<u>26705(3 MHz)</u>
REFERENCE VOLTAGE:	<u>3.880 VDC</u>
DEVIATION LIMIT:	<u>± 0.000 25 % or 2.5 ppm</u>

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.880	+20(Ref)	815 499 987	0.0	0.000 000	0.000
100 %		-30	815 500 000	13.3	0.000 002	0.016
100 %		-20	815 499 976	-10.4	-0.000 001	-0.013
100 %		-10	815 499 978	-8.5	-0.000 001	-0.010
100 %		0	815 500 000	13.7	0.000 002	0.017
100 %		+10	815 499 997	10.6	0.000 001	0.013
100 %		+30	815 499 975	-11.8	-0.000 001	-0.014
100 %		+40	815 499 995	8.5	0.000 001	0.010
100 %		+50	815 499 972	-14.6	-0.000 002	-0.018
Batt. Endpoint	3.300	+20	815 499 970	-17.2	-0.000 002	-0.021

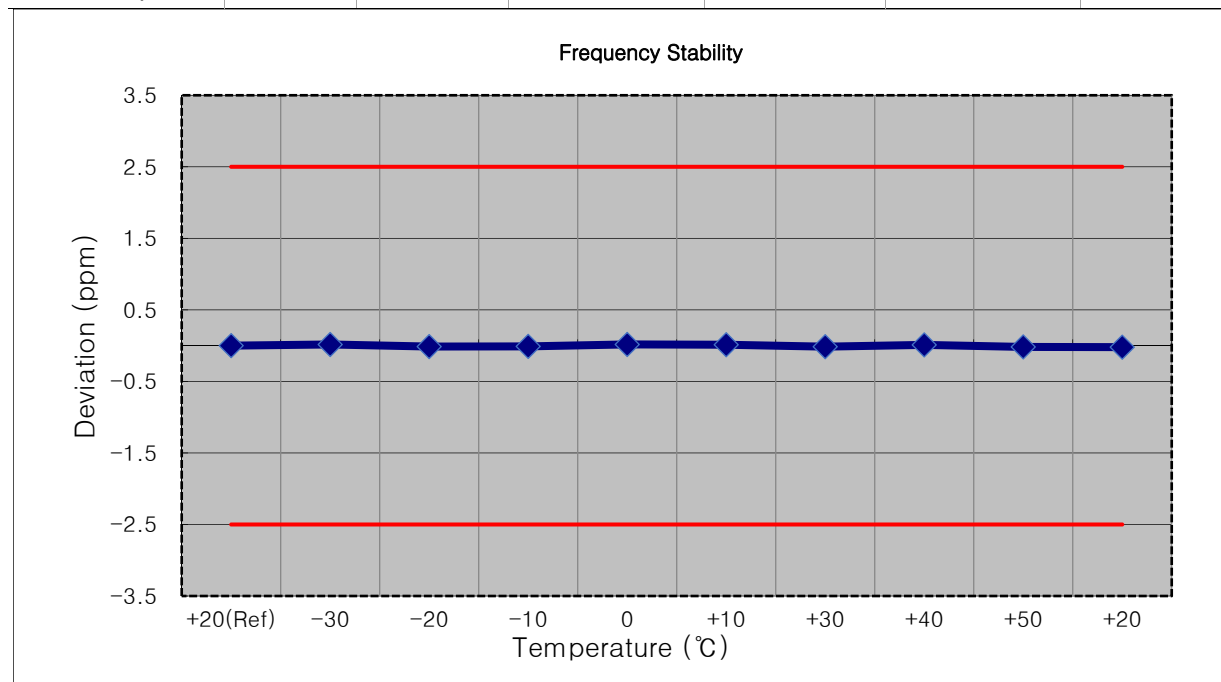


MODE:	<u>LTE 26</u>
OPERATING FREQUENCY:	<u>816,500,000 Hz</u>
CHANNEL:	<u>26715(5 MHz)</u>
REFERENCE VOLTAGE:	<u>3.880 VDC</u>
DEVIATION LIMIT:	<u>± 0.000 25 % or 2.5 ppm</u>

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.880	+20(Ref)	816 499 994	0.0	0.000 000	0.000
100 %		-30	816 500 000	5.5	0.000 001	0.007
100 %		-20	816 499 990	-4.0	0.000 000	-0.005
100 %		-10	816 499 990	-4.3	-0.000 001	-0.005
100 %		0	816 499 991	-3.6	0.000 000	-0.004
100 %		+10	816 499 989	-5.7	-0.000 001	-0.007
100 %		+30	816 499 992	-2.7	0.000 000	-0.003
100 %		+40	816 499 988	-5.8	-0.000 001	-0.007
100 %		+50	816 499 997	2.8	0.000 000	0.003
Batt. Endpoint	3.300	+20	816 499 991	-3.5	0.000 000	-0.004

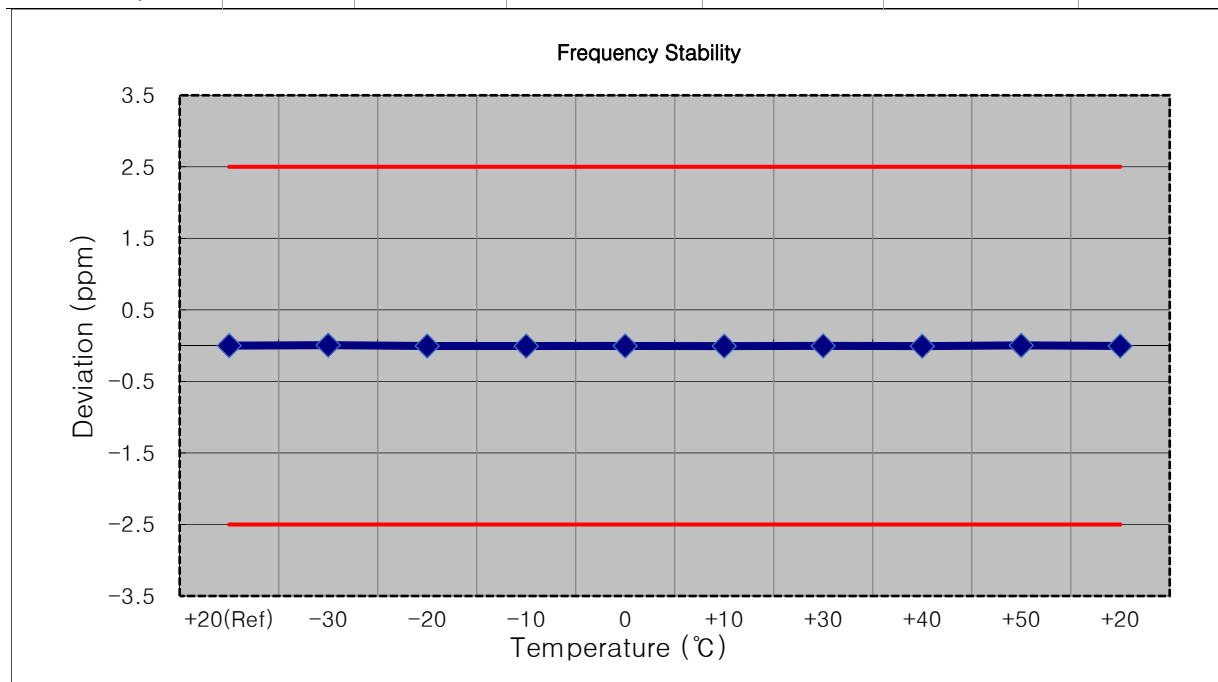


MODE:	<u>LTE 26</u>
OPERATING FREQUENCY:	<u>819,000,000 Hz</u>
CHANNEL:	<u>26740(10 MHz)</u>
REFERENCE VOLTAGE:	<u>3.880 VDC</u>
DEVIATION LIMIT:	<u>± 0.000 25 % or 2.5 ppm</u>

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.880	+20(Ref)	818 999 990	0.0	0.000 000	0.000
100 %		-30	818 999 980	-10.0	-0.000 001	-0.012
100 %		-20	818 999 982	-7.2	-0.000 001	-0.009
100 %		-10	818 999 980	-9.3	-0.000 001	-0.011
100 %		0	818 999 984	-5.5	-0.000 001	-0.007
100 %		+10	818 999 983	-6.7	-0.000 001	-0.008
100 %		+30	818 999 984	-5.8	-0.000 001	-0.007
100 %		+40	818 999 982	-8.0	-0.000 001	-0.010
100 %		+50	818 999 984	-6.0	-0.000 001	-0.007
Batt. Endpoint	3.300	+20	818 999 985	-4.7	-0.000 001	-0.006

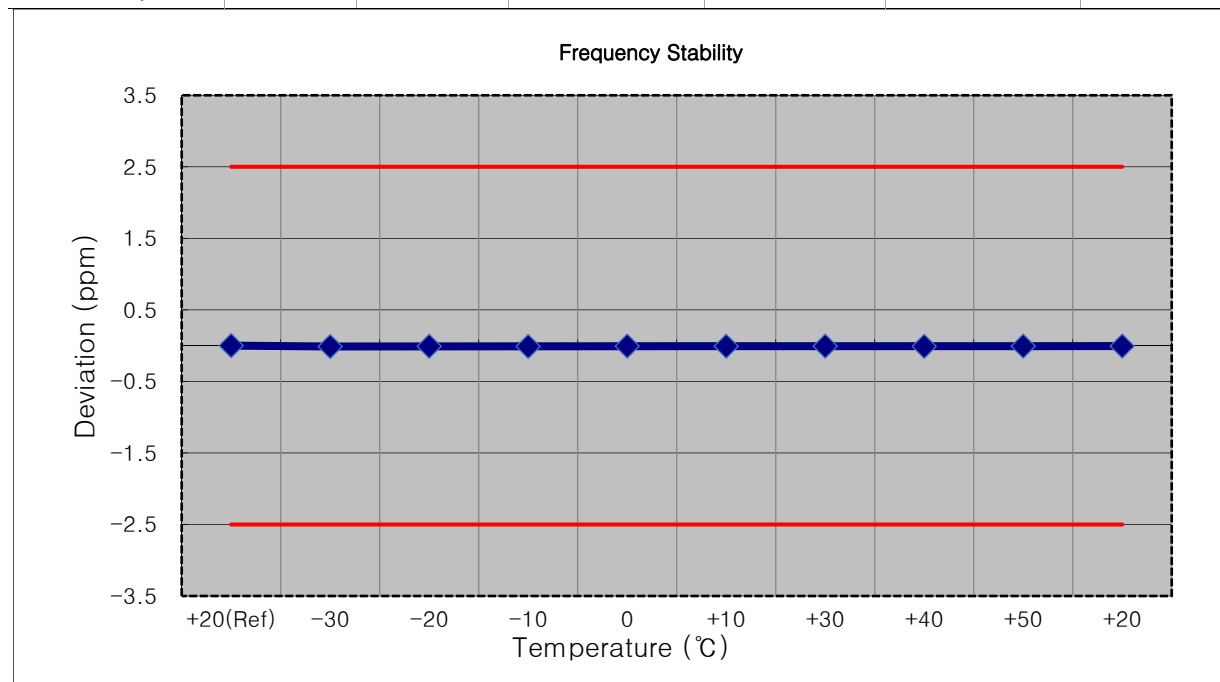

MODE:	<u>LTE 26</u>
OPERATING FREQUENCY:	<u>821,500,000 Hz</u>
CHANNEL:	<u>26765(15 MHz)</u>
REFERENCE VOLTAGE:	<u>3.880 VDC</u>
DEVIATION LIMIT:	$\pm 0.000\ 25\ \%$ or 2.5 ppm

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.880	+20(Ref)	821 499 991	0.0	0.000 000	0.000
100 %		-30	821 499 982	-9.6	-0.000 001	-0.012
100 %		-20	821 499 986	-5.7	-0.000 001	-0.007
100 %		-10	821 499 982	-9.2	-0.000 001	-0.011
100 %		0	821 499 984	-7.3	-0.000 001	-0.009
100 %		+10	821 499 984	-7.8	-0.000 001	-0.009
100 %		+30	821 499 986	-5.9	-0.000 001	-0.007
100 %		+40	821 499 984	-7.0	-0.000 001	-0.009
100 %		+50	821 499 985	-6.7	-0.000 001	-0.008
Batt. Endpoint	3.300	+20	821 499 985	-6.5	-0.000 001	-0.008

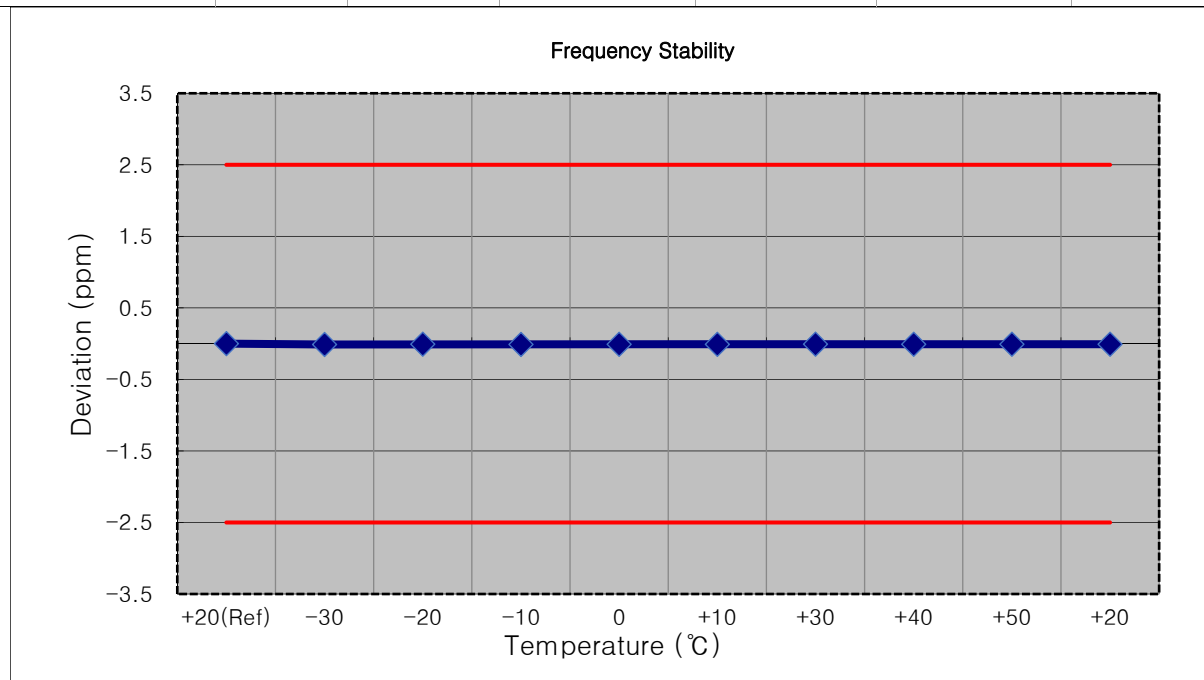

9.8 STRADDLE CHANNEL

9.8.1 CONDUCTED OUTPUT POWER

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824 MHz		
				dBm	W	
1.4	QPSK	1	0	23.98	0.250	100
		1	3	23.94	0.248	100
		1	5	23.79	0.239	100
		3	0	23.84	0.242	100
		3	1	23.93	0.247	100
		3	3	23.93	0.247	100
		6	0	22.30	0.170	100
	16QAM	1	0	23.39	0.218	100
		1	3	23.21	0.209	100
		1	5	23.34	0.216	100
		3	0	23.30	0.214	100
		3	1	23.00	0.200	100
		3	3	23.06	0.202	100
		6	0	21.98	0.158	100
	64QAM	1	0	22.42	0.175	100
		1	3	22.18	0.165	100
		1	5	22.18	0.165	100
		3	0	22.14	0.164	100
		3	1	22.06	0.161	100
		3	3	22.06	0.161	100
		6	0	20.90	0.123	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824 MHz		
				dBm	W	
3	QPSK	1	0	23.95	0.248	100
		1	7	23.83	0.242	100
		1	14	23.89	0.245	100
		8	0	22.84	0.192	100
		8	3	22.89	0.195	100
		8	7	22.87	0.193	100
		15	0	22.86	0.193	100
	16QAM	1	0	23.37	0.217	100
		1	7	23.25	0.212	100
		1	14	23.18	0.208	100
		8	0	21.91	0.155	100
		8	3	21.96	0.157	100
		8	7	21.91	0.155	100
		15	0	21.93	0.156	100
	64QAM	1	0	22.20	0.166	100
		1	7	22.22	0.167	100
		1	14	22.08	0.161	100
		8	0	20.94	0.124	100
		8	3	20.98	0.125	100
		8	7	20.89	0.123	100
		15	0	20.90	0.123	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824 MHz		
				dBm	W	
5	QPSK	1	0	23.88	0.244	100
		1	12	23.93	0.247	100
		1	24	23.96	0.249	100
		12	0	22.89	0.194	100
		12	6	22.95	0.197	100
		12	11	22.90	0.195	100
		25	0	22.89	0.195	100
	16QAM	1	0	23.32	0.215	100
		1	12	23.21	0.209	100
		1	24	23.14	0.206	100
		12	0	21.90	0.155	100
		12	6	22.01	0.159	100
		12	11	21.94	0.156	100
		25	0	21.91	0.155	100
	64QAM	1	0	22.20	0.166	100
		1	12	22.10	0.162	100
		1	24	22.00	0.158	100
		12	0	20.90	0.123	100
		12	6	20.99	0.126	100
		12	11	20.90	0.123	100
		25	0	20.92	0.124	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824 MHz		
				dBm	W	
10	QPSK	1	0	23.87	0.244	100
		1	24	24.05	0.254	100
		1	49	23.67	0.233	100
		25	0	22.85	0.193	100
		25	12	22.90	0.195	100
		25	24	22.92	0.196	100
		50	0	22.87	0.194	100
	16QAM	1	0	23.30	0.214	100
		1	24	23.17	0.207	100
		1	49	23.23	0.210	100
		25	0	21.88	0.154	100
		25	12	21.92	0.155	100
		25	24	21.91	0.155	100
		50	0	21.90	0.155	100
	64QAM	1	0	22.05	0.160	100
		1	24	22.09	0.162	100
		1	49	22.14	0.164	100
		25	0	20.93	0.124	100
		25	12	20.91	0.123	100
		25	24	20.88	0.122	100
		50	0	20.89	0.123	100

9.8.2 EFFECTIVE RADIATED POWER

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
								W	W	dBm	Size	Offset
824.0	LTE B26/ 1.4 MHz	QPSK	-30.75	31.55	-10.24	1.44	H	< 7.00	0.097	19.87	1	5
		16QAM	-31.31	30.99	-10.24	1.44	H		0.085	19.31		
		64QAM	-32.53	29.77	-10.24	1.44	H		0.064	18.09		

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
								W	W	dBm	Size	Offset
824.0	LTE B26/ 3 MHz	QPSK	-30.79	31.51	-10.24	1.44	H	< 7.00	0.096	19.83	1	14
		16QAM	-31.41	30.89	-10.24	1.44	H		0.083	19.21		
		64QAM	-32.57	29.73	-10.24	1.44	H		0.064	18.05		

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
								W	W	dBm	Size	Offset
824.0	LTE B26/ 5 MHz	QPSK	-30.76	31.54	-10.24	1.44	H	< 7.00	0.097	19.86	1	24
		16QAM	-31.43	30.87	-10.24	1.44	H		0.083	19.19		
		64QAM	-32.57	29.73	-10.24	1.44	H		0.064	18.05		

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
								W	W	dBm	Size	Offset
824.0	LTE B26/ 10 MHz	QPSK	-30.67	31.63	-10.24	1.44	H	< 7.00	0.099	19.95	1	49
		16QAM	-31.39	30.91	-10.24	1.44	H		0.084	19.23		
		64QAM	-32.48	29.82	-10.24	1.44	H		0.065	18.14		

9.8.3 RADIATED SPURIOUS EMISSIONS

- ▣ MODE: LTE B26(Straddle)
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit	RB	
									Size	Offset
26790 (824.0)	1 648.00	-43.82	9.58	-59.41	2.02	H	-51.85	-13.00	1	49
	2 472.00	-42.68	10.26	-54.03	2.59	H	-46.36	-13.00		
	3 296.00	-47.28	12.13	-56.47	2.95	H	-47.29	-13.00		

9.8.4 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
26	1.4	824.0	3.7144	27.976	-67.154	-39.178	-13.00
	3		3.7054	27.976	-66.842	-38.866	
	5		3.6895	27.976	-67.028	-39.052	
	10		3.7029	27.976	-67.296	-39.320	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 182 ~ 185.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131

9.8.5 CHANNEL EDGE(Part90)


- Test Channel : 26790(824.0MHz)
- Plots of the EUT's Band Edge are shown Page 186 ~ 197.

9.8.6 BAND EDGE(Part22)


- Test Channel : 26790(824.0 MHz)
- Plots of the EUT's Band Edge are shown Page 198 ~ 205.

10. TEST PLOTS(Main 1 ANT)


BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26783 QPSK RB 6_0)

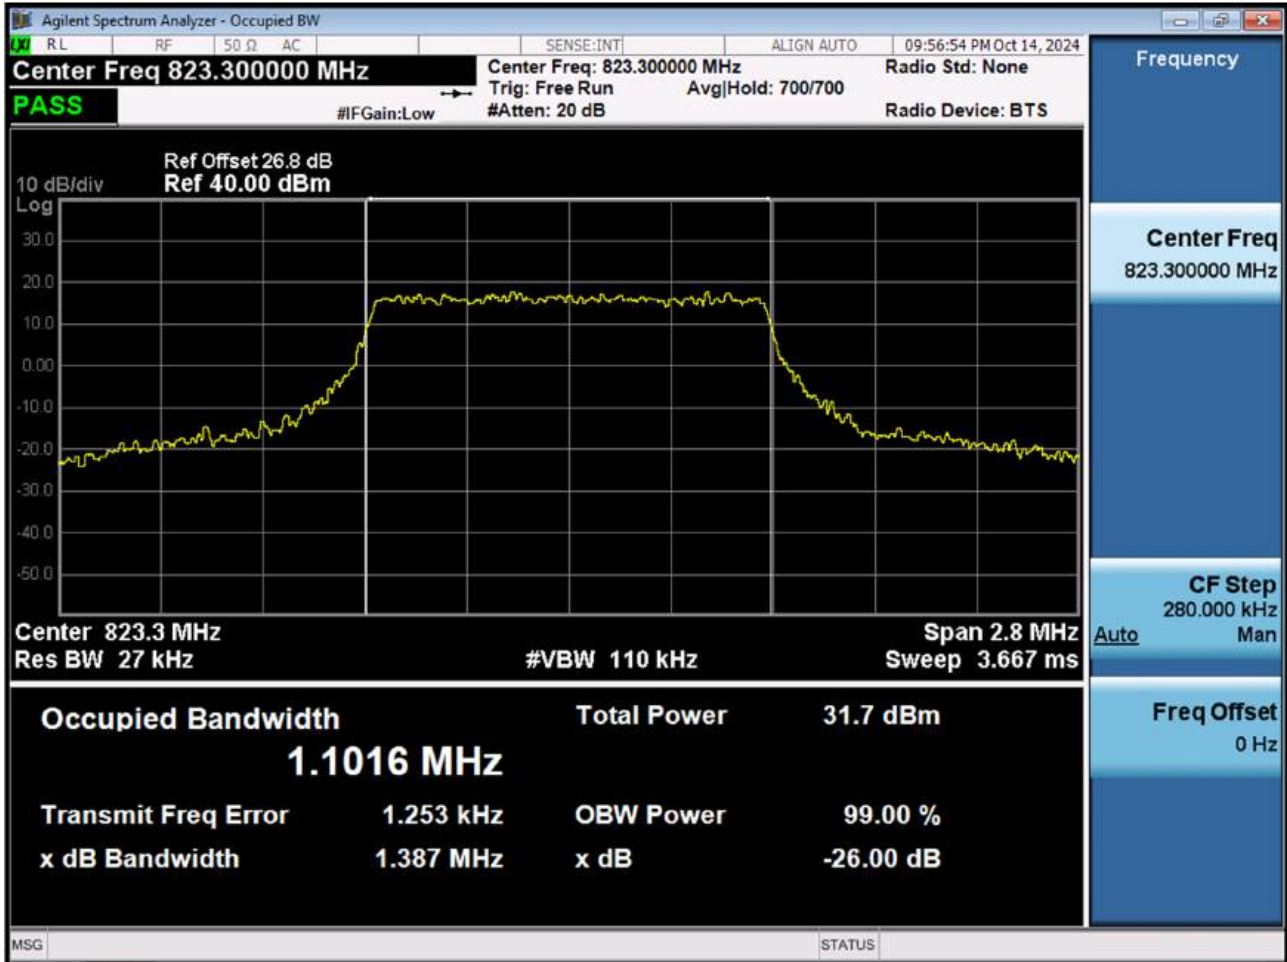


BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26783 16QAM RB 6_0)

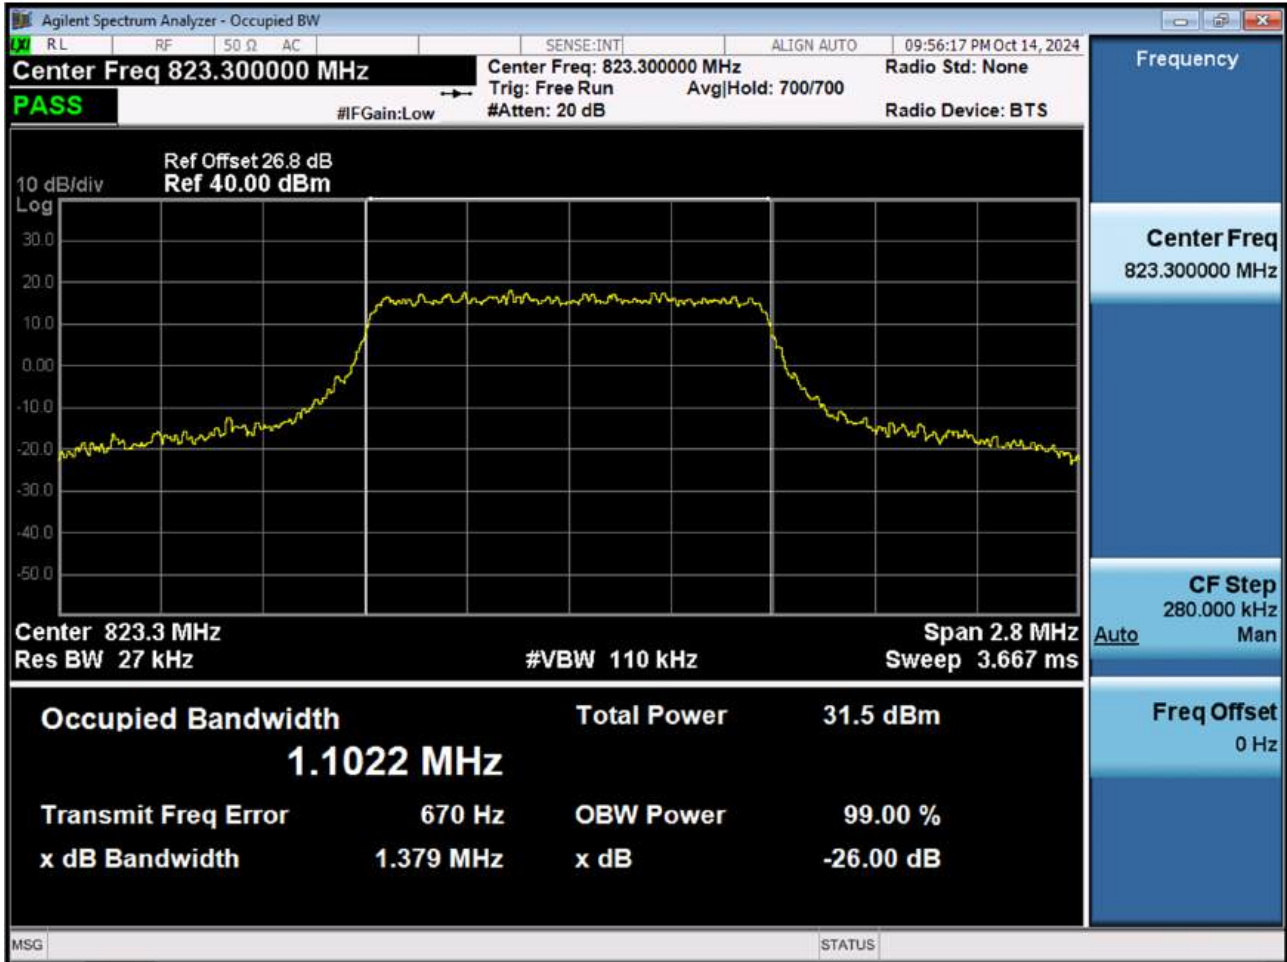


BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26783 64QAM RB 6_0)

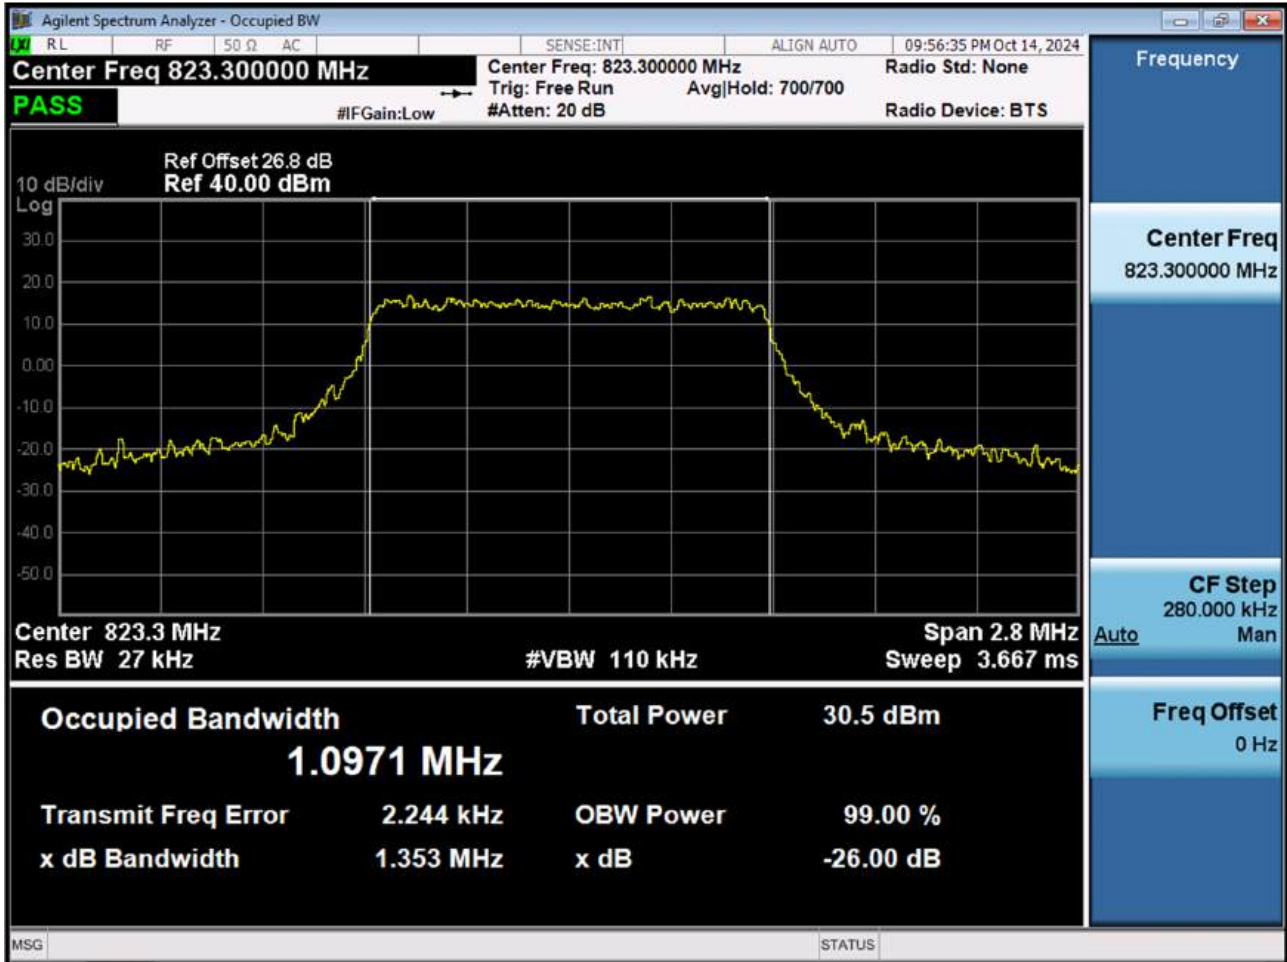


BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26775 QPSK RB 15_0)

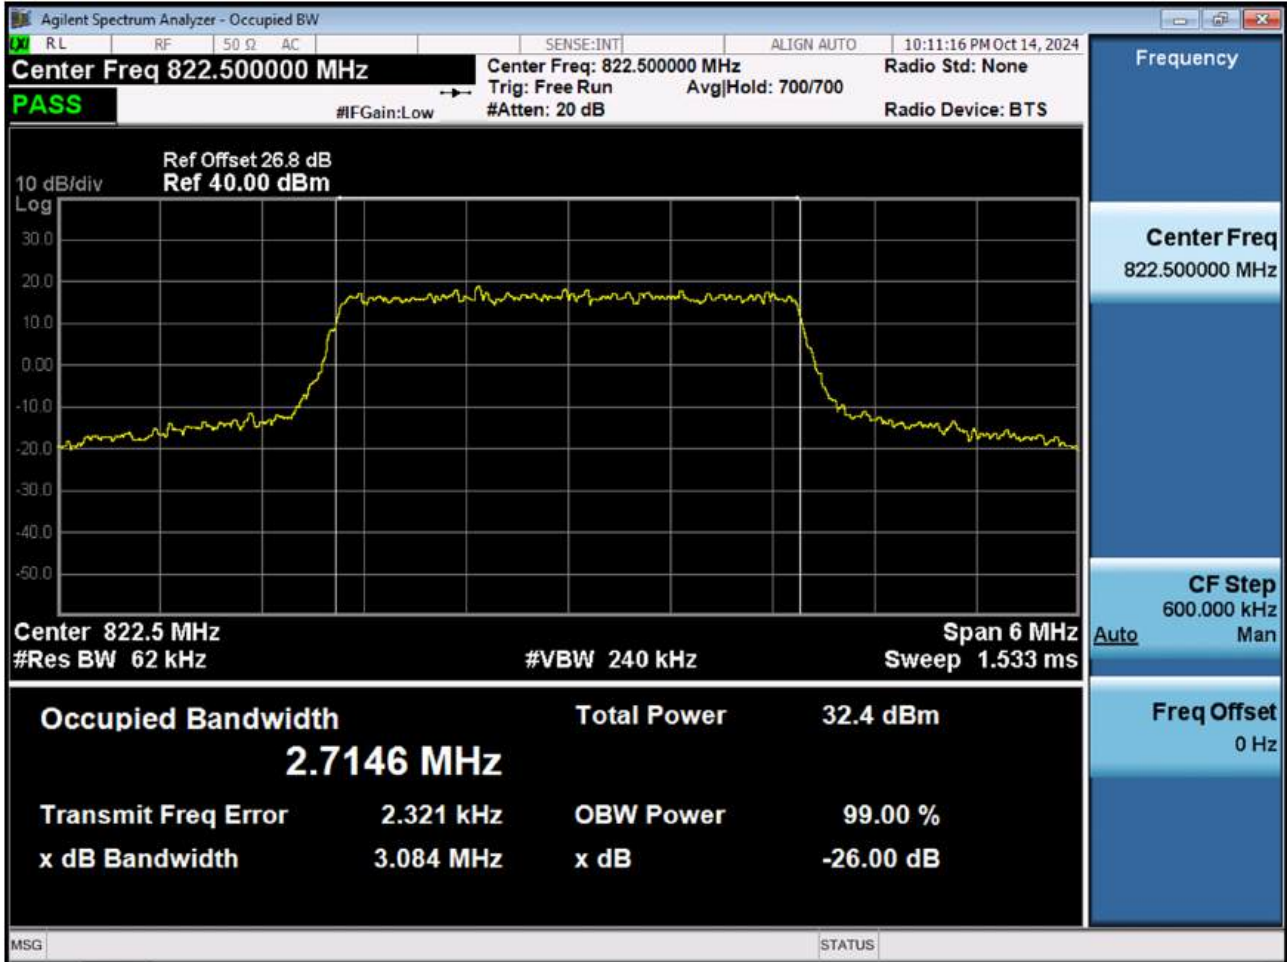


BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26775 16QAM RB 15_0)

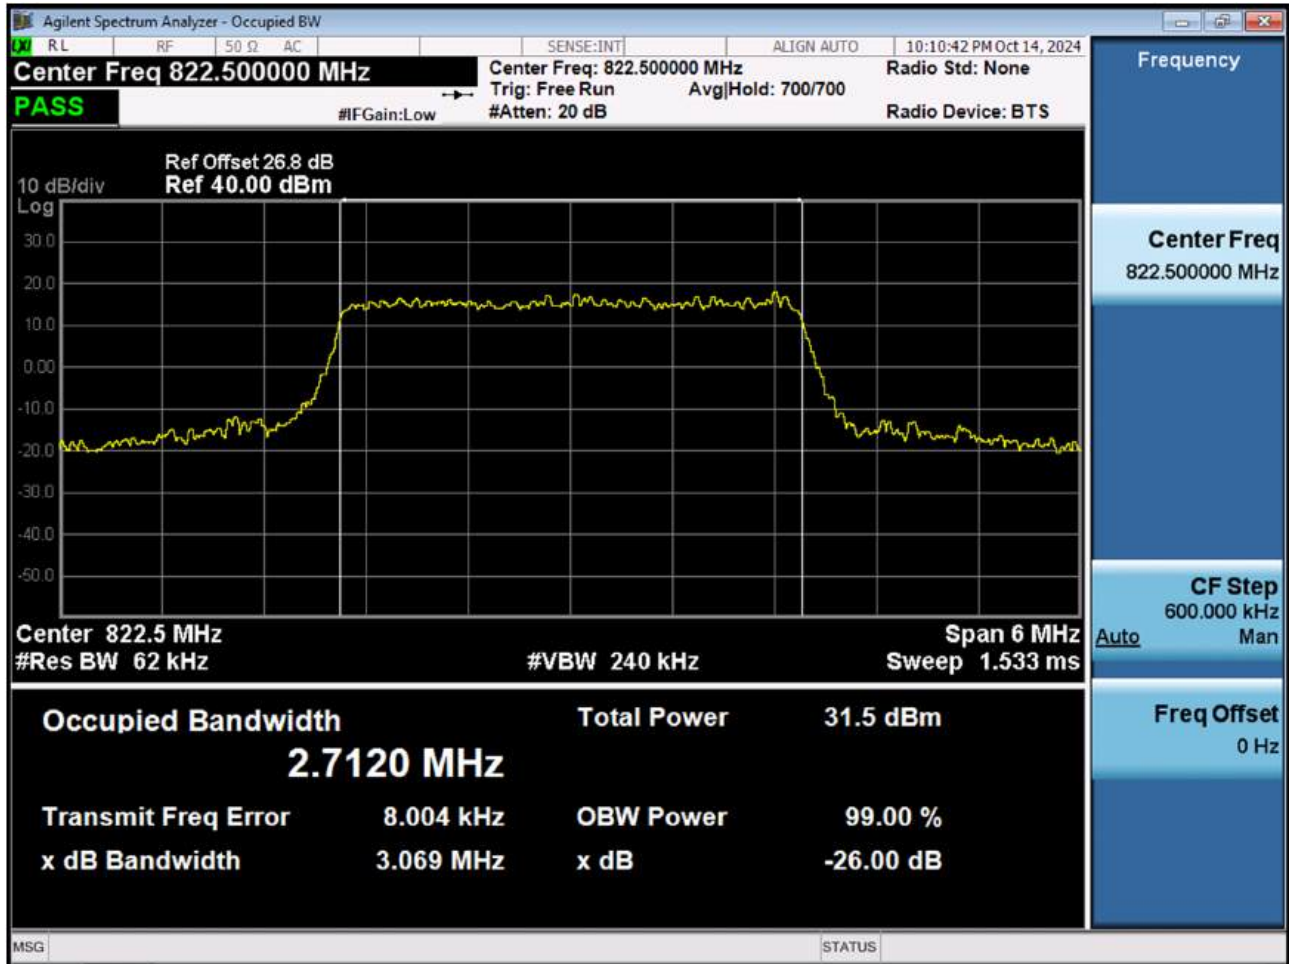


BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26775 64QAM RB 15_0)

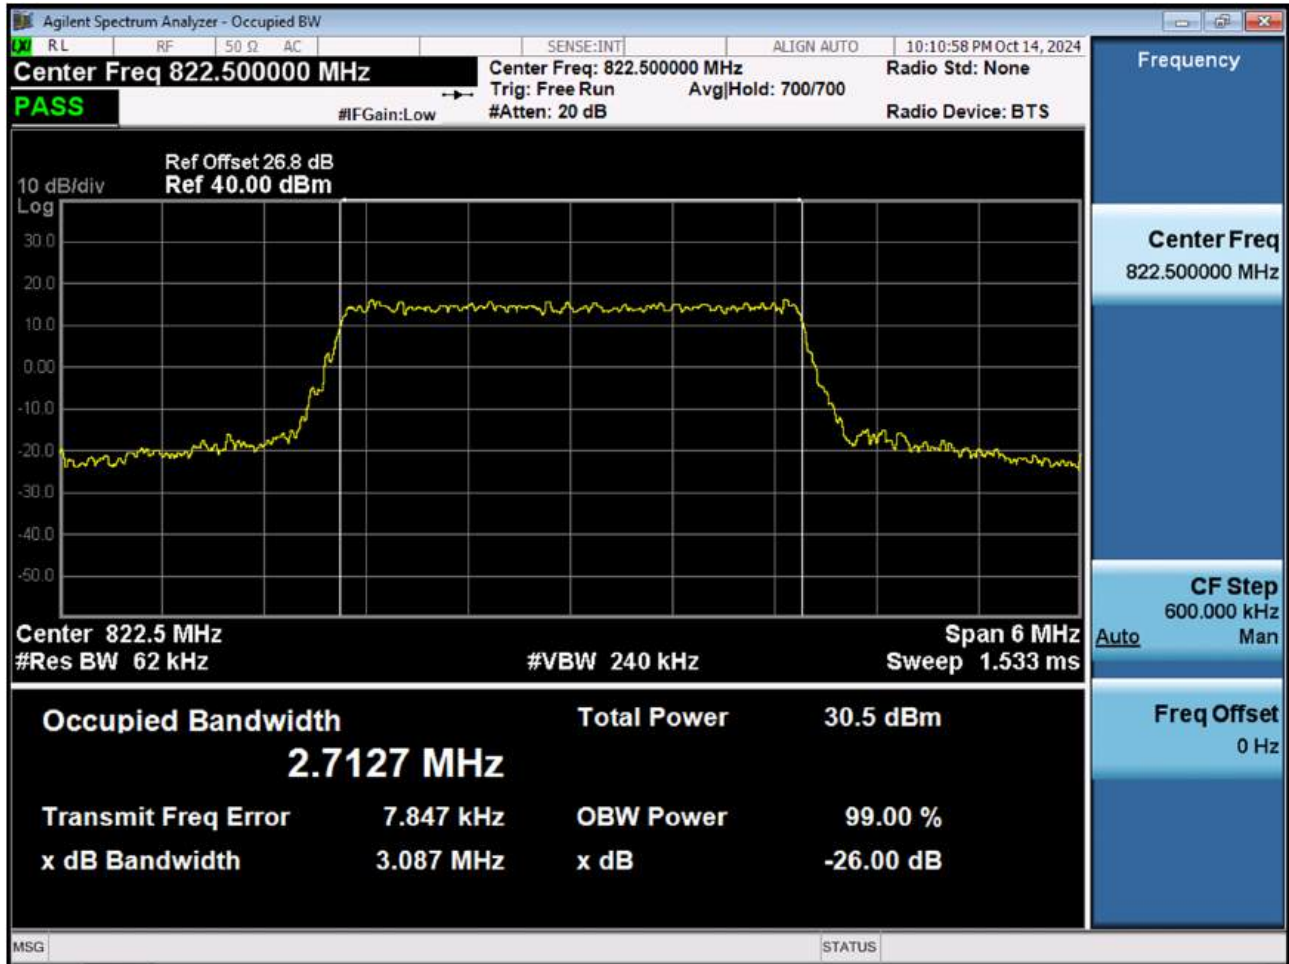


BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26765 QPSK RB 25_0)

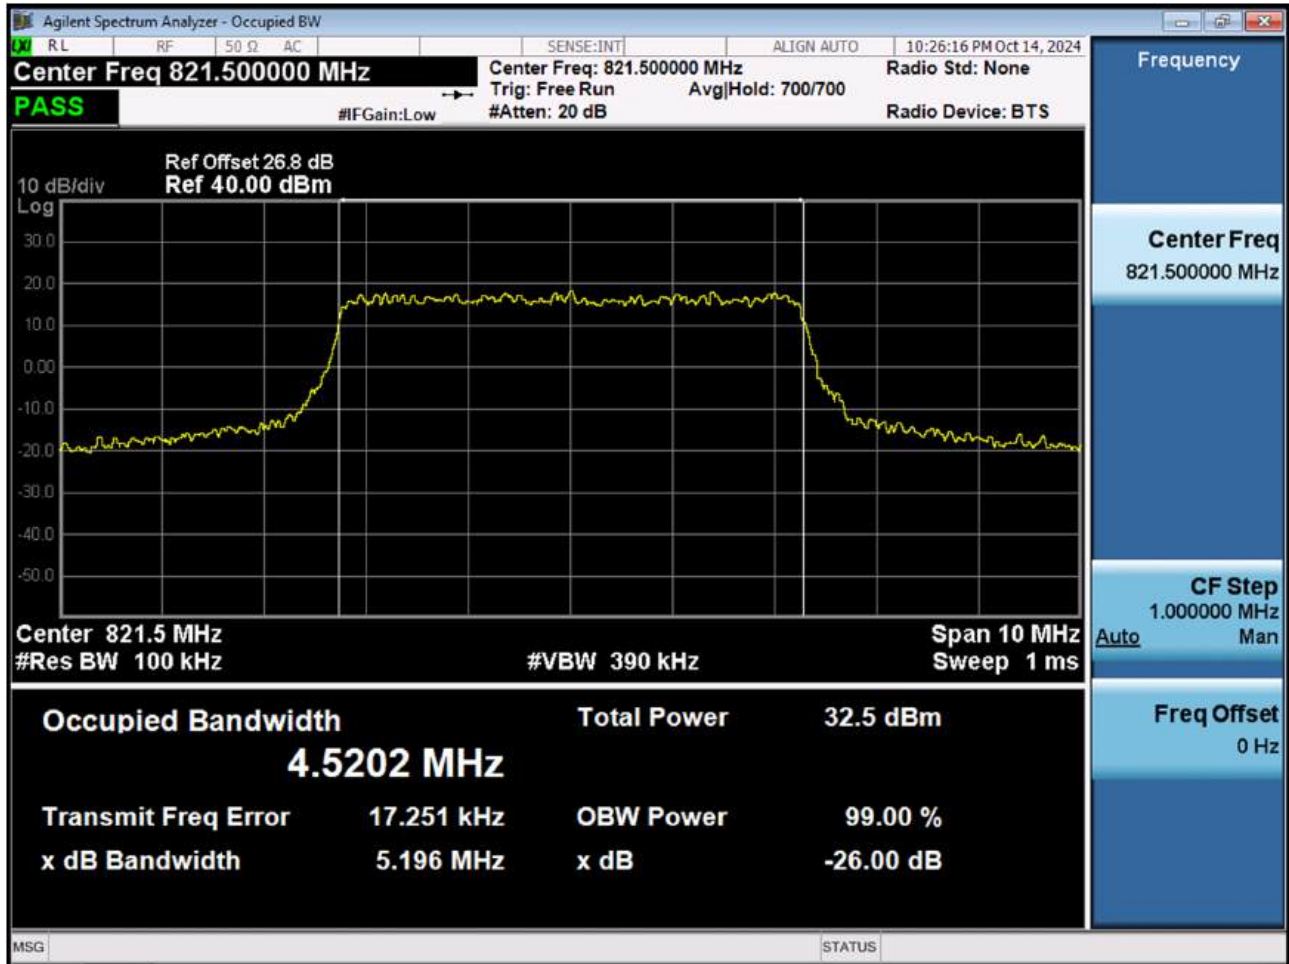


BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26765 16QAM RB 25_0)

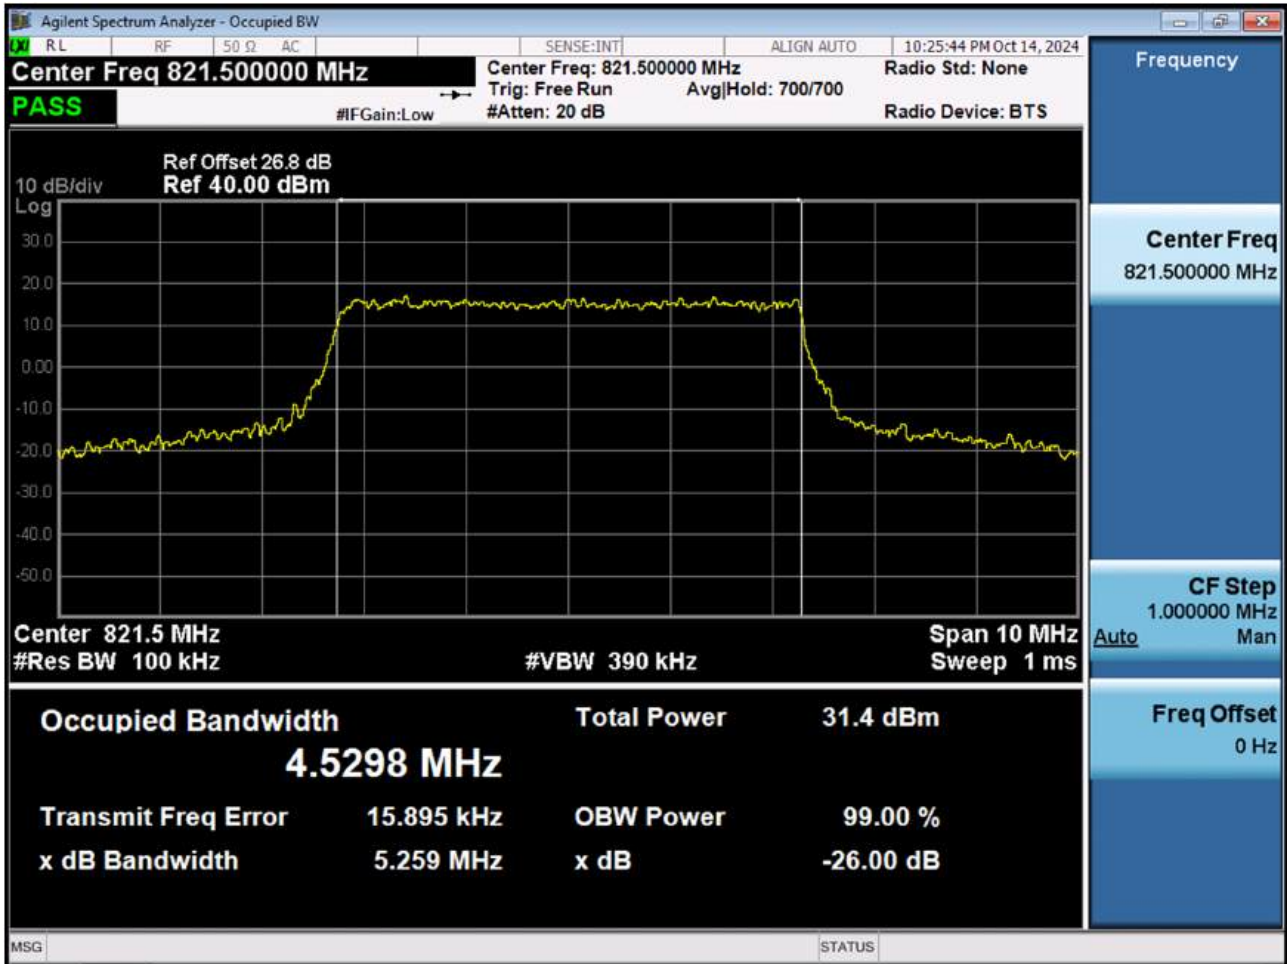


BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26765 64QAM RB 25_0)

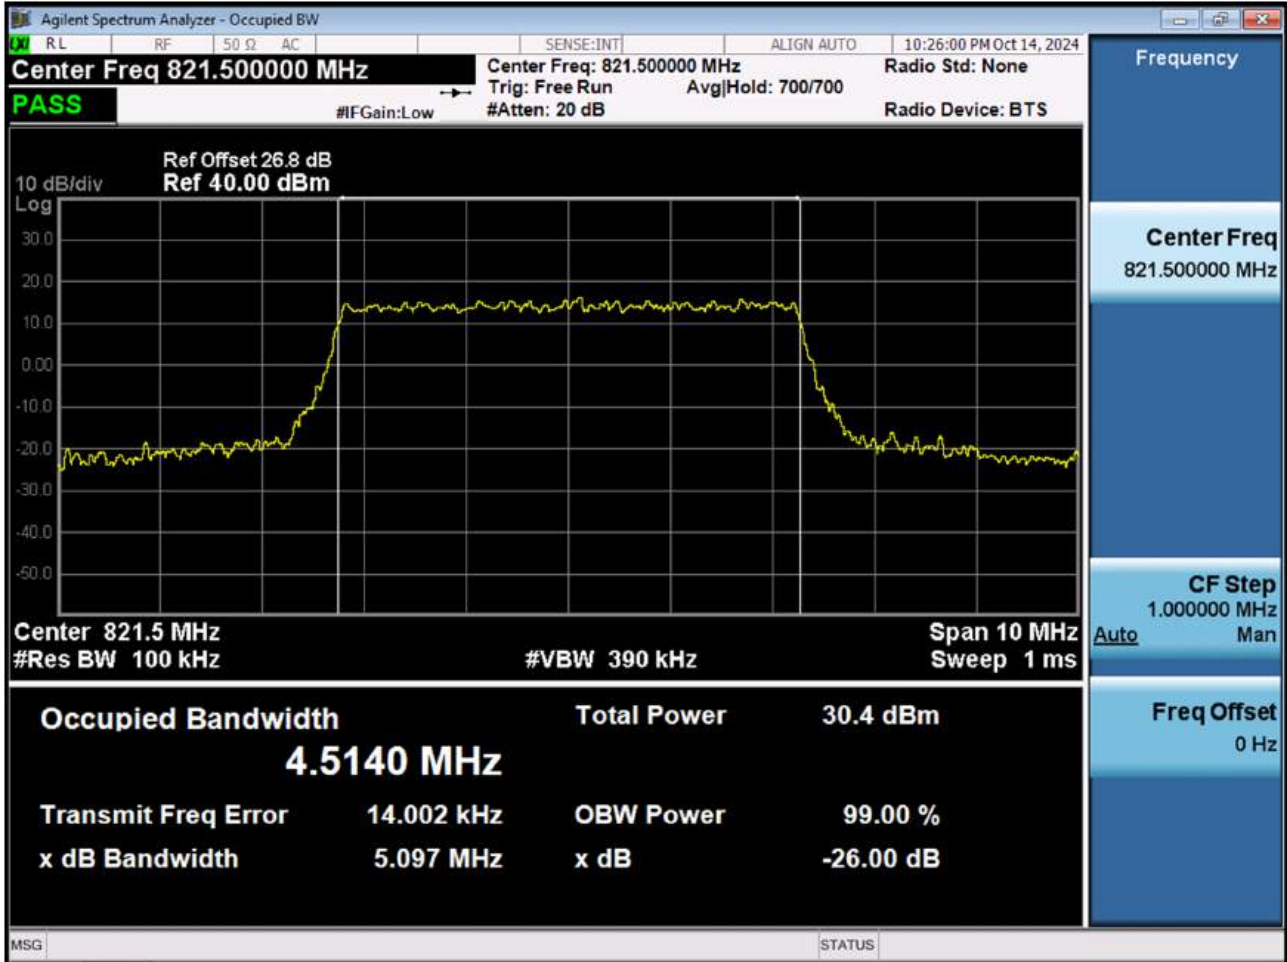


BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26740 QPSK RB 50_0)

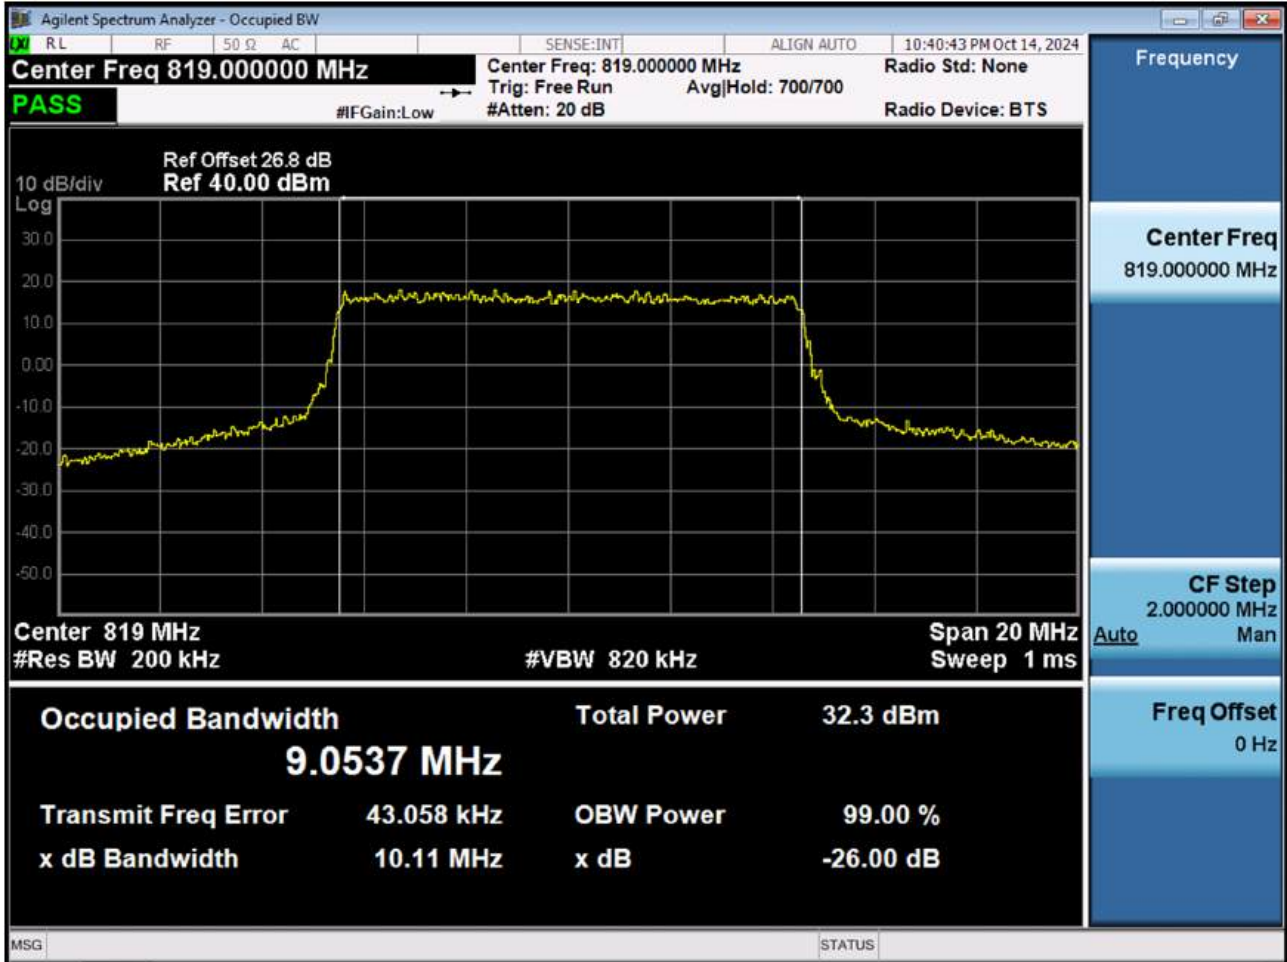


BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26740 16QAM RB 50_0)

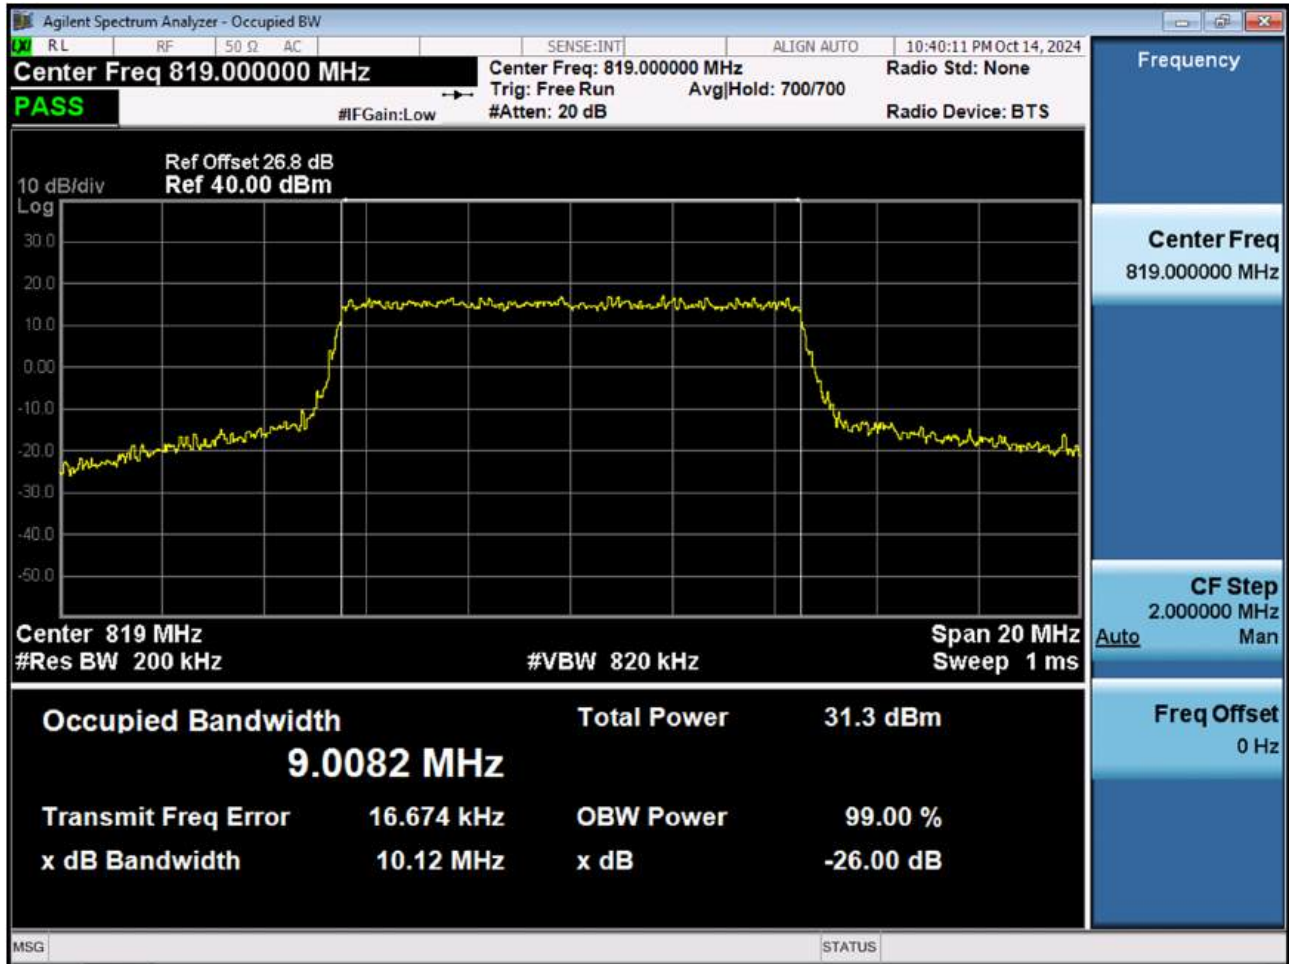


BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26740 64QAM RB 50_0)

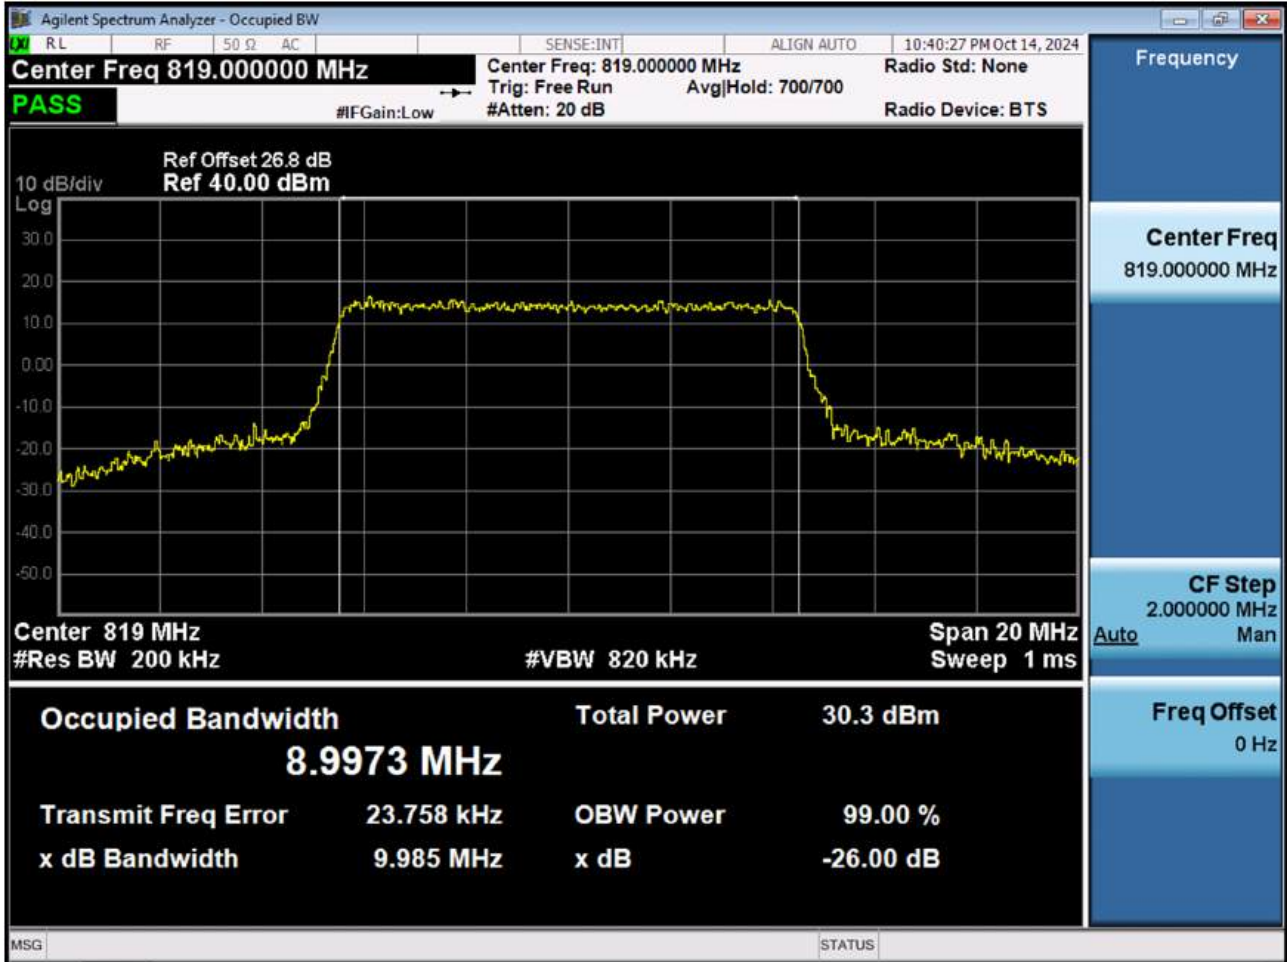


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26765 QPSK RB 75_0)

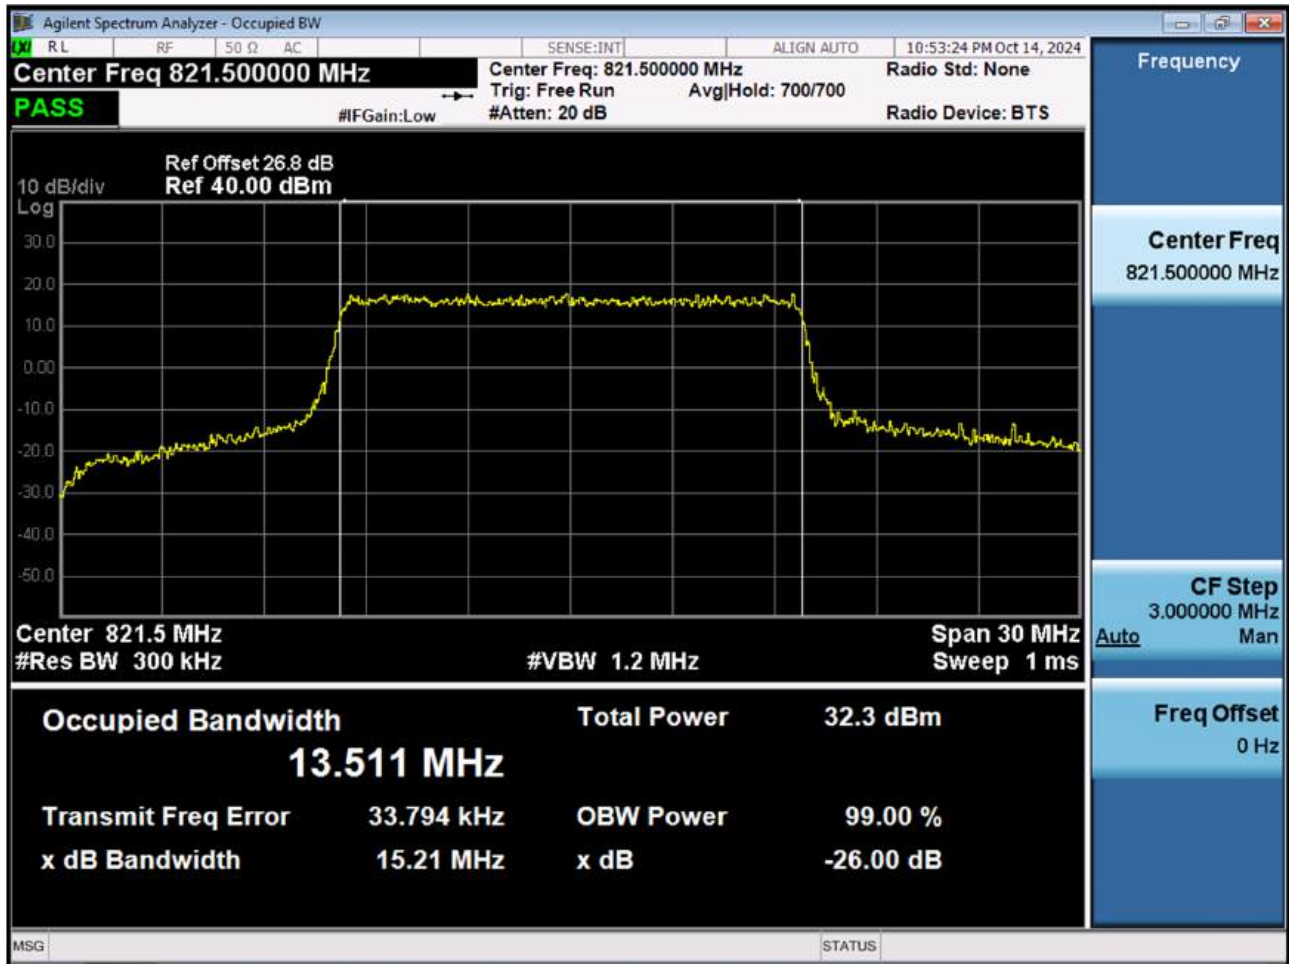


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26765 16QAM RB 75_0)

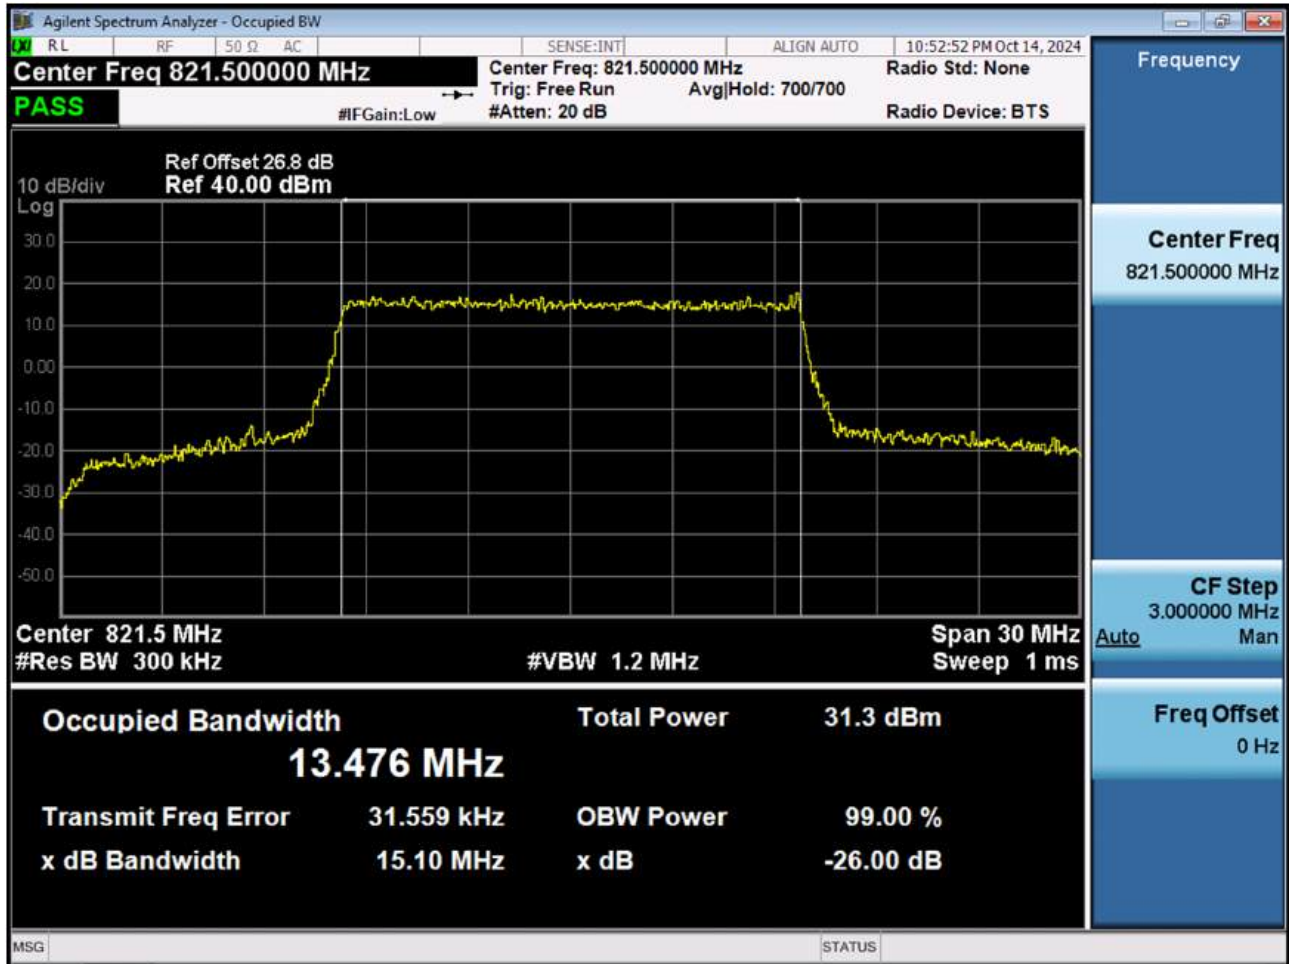

BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26765 64QAM RB 75_0)

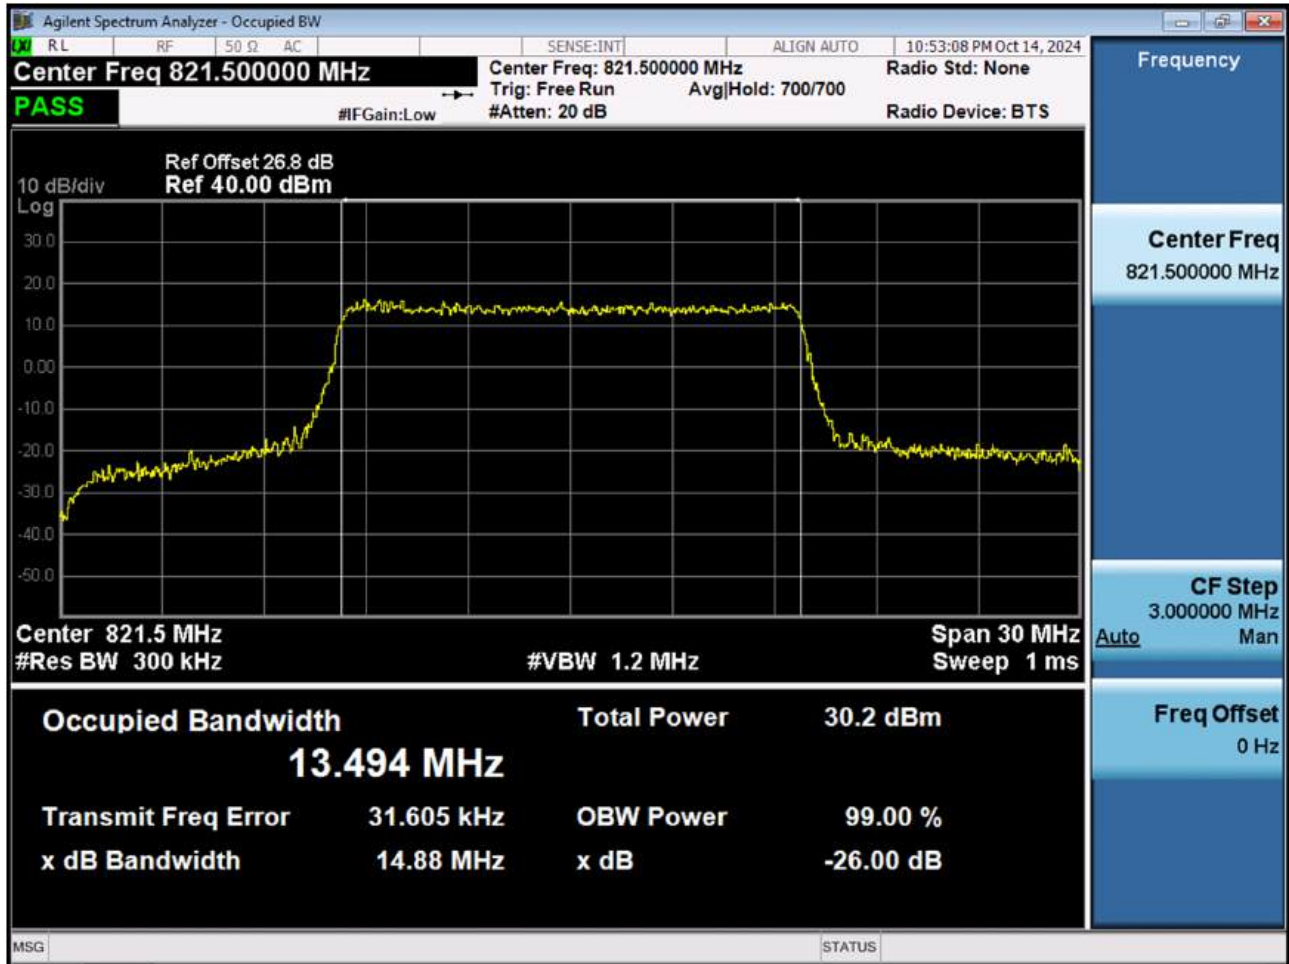


BAND 26. Lower Channel Edge Plot (1.4 M BW Ch.26697 QPSK RB 1, Offset 0)

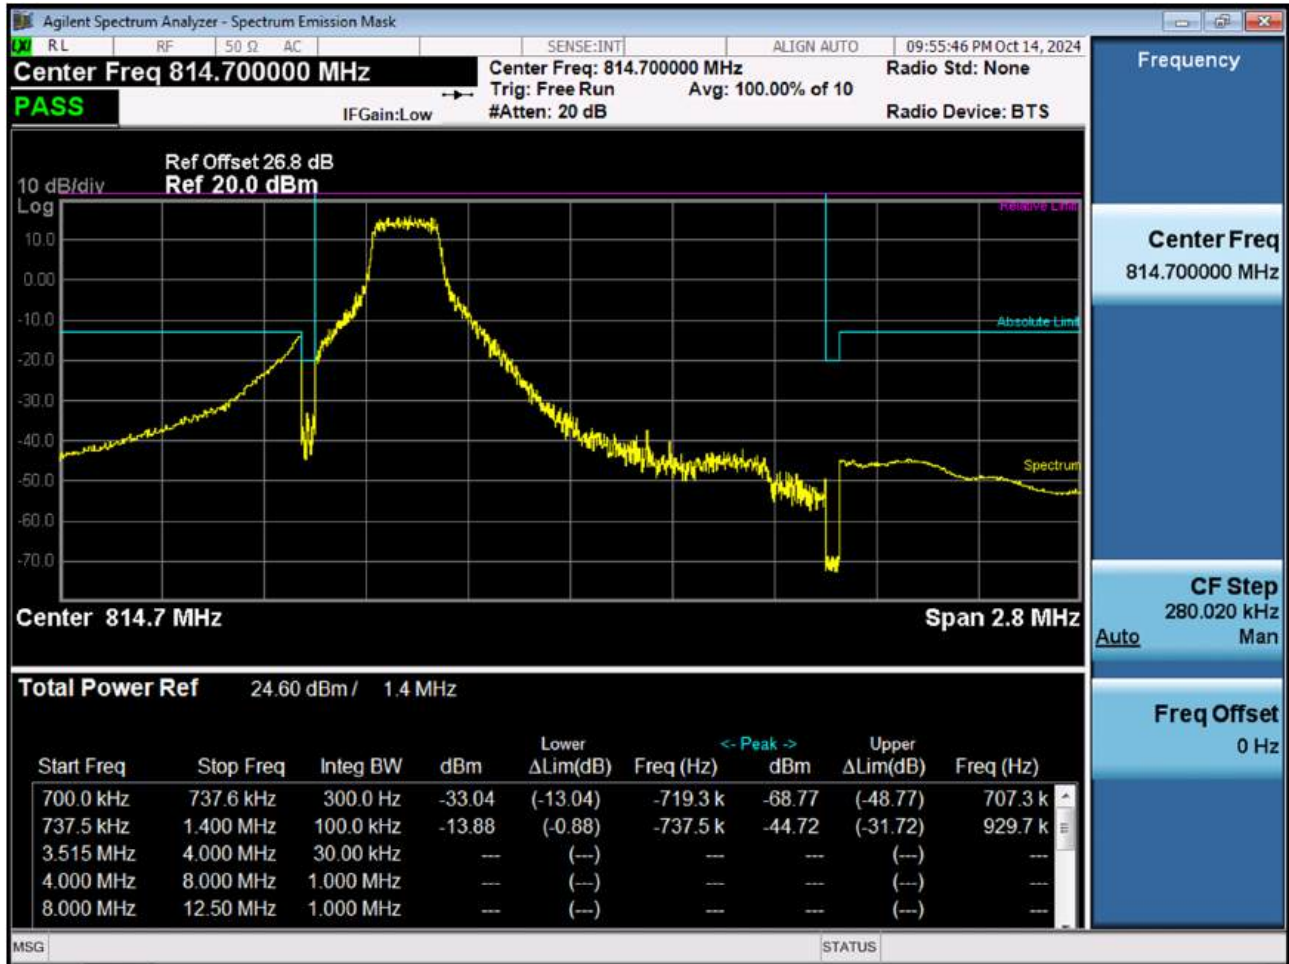

BAND 26. Lower Channel Edge Plot (1.4 M BW Ch.26697 QPSK_RB6_Offset 0)




BAND 26. Lower Channel Edge Plot (3 M BW Ch.26705 QPSK RB 1, Offset 0)

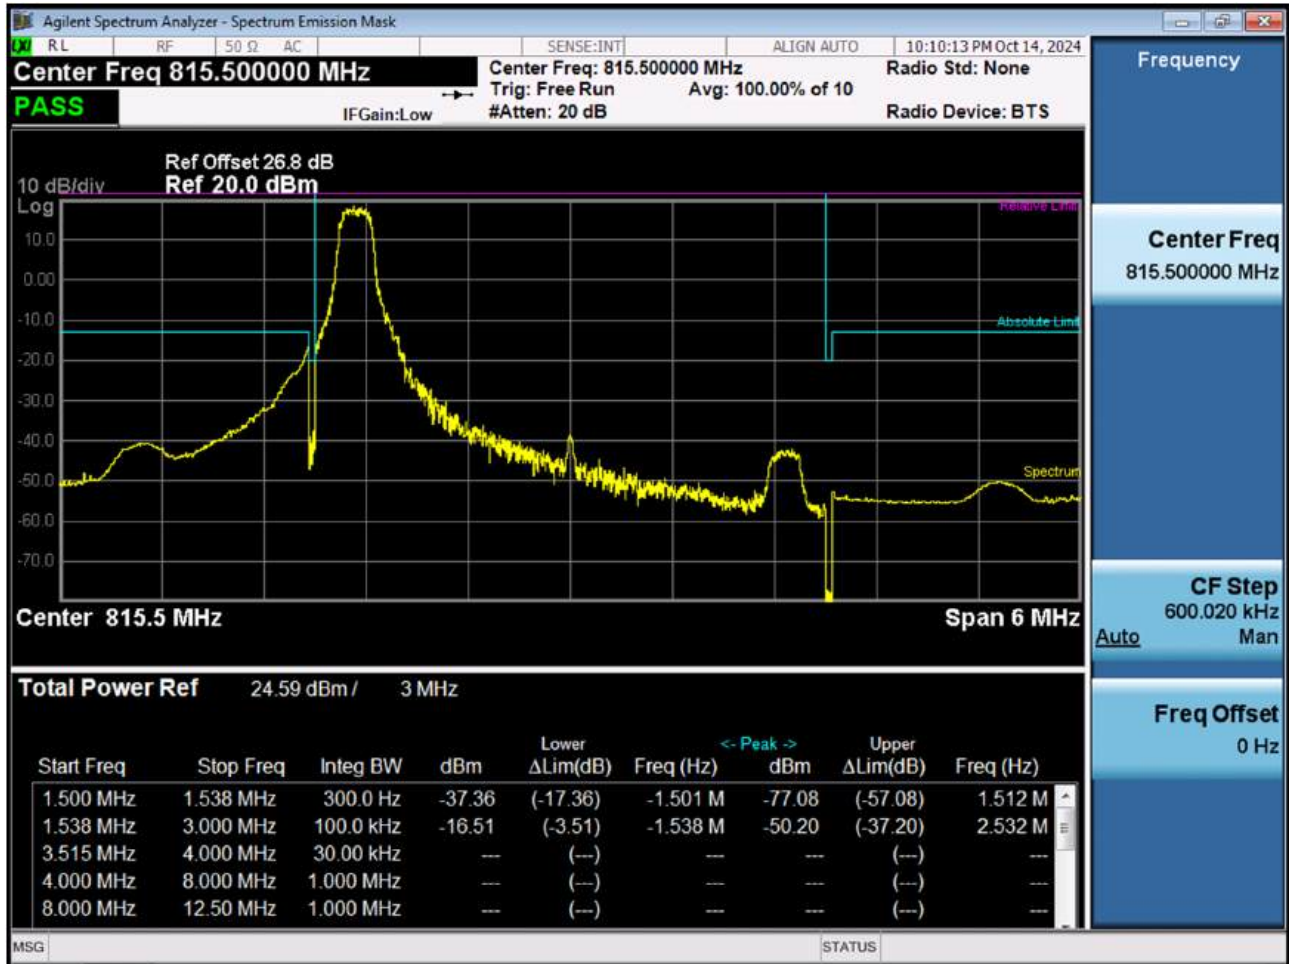

BAND 26. Lower Channel Edge Plot (3 M BW Ch.26705 QPSK_RB15_Offset 0)




BAND 26. Lower Channel Edge Plot (5 M BW Ch.26715 QPSK RB 1, Offset 0)

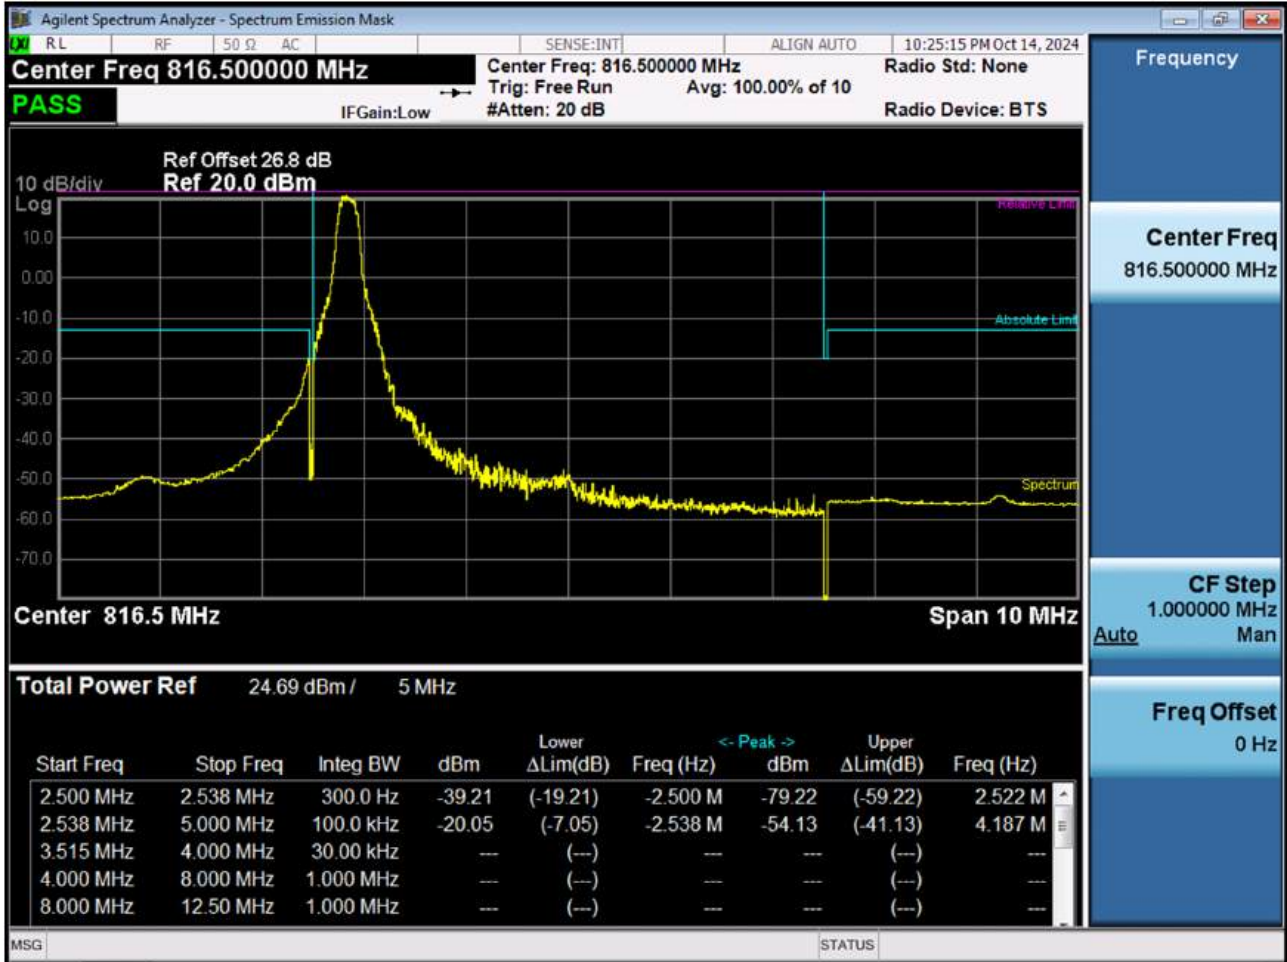

BAND 26. Lower Channel Edge Plot (5 M BW Ch.26715 QPSK_RB25_Offset 0)




BAND 26. Low Channel Edge Plot (10 M BW Ch.26740 QPSK RB 1, Offset 0)

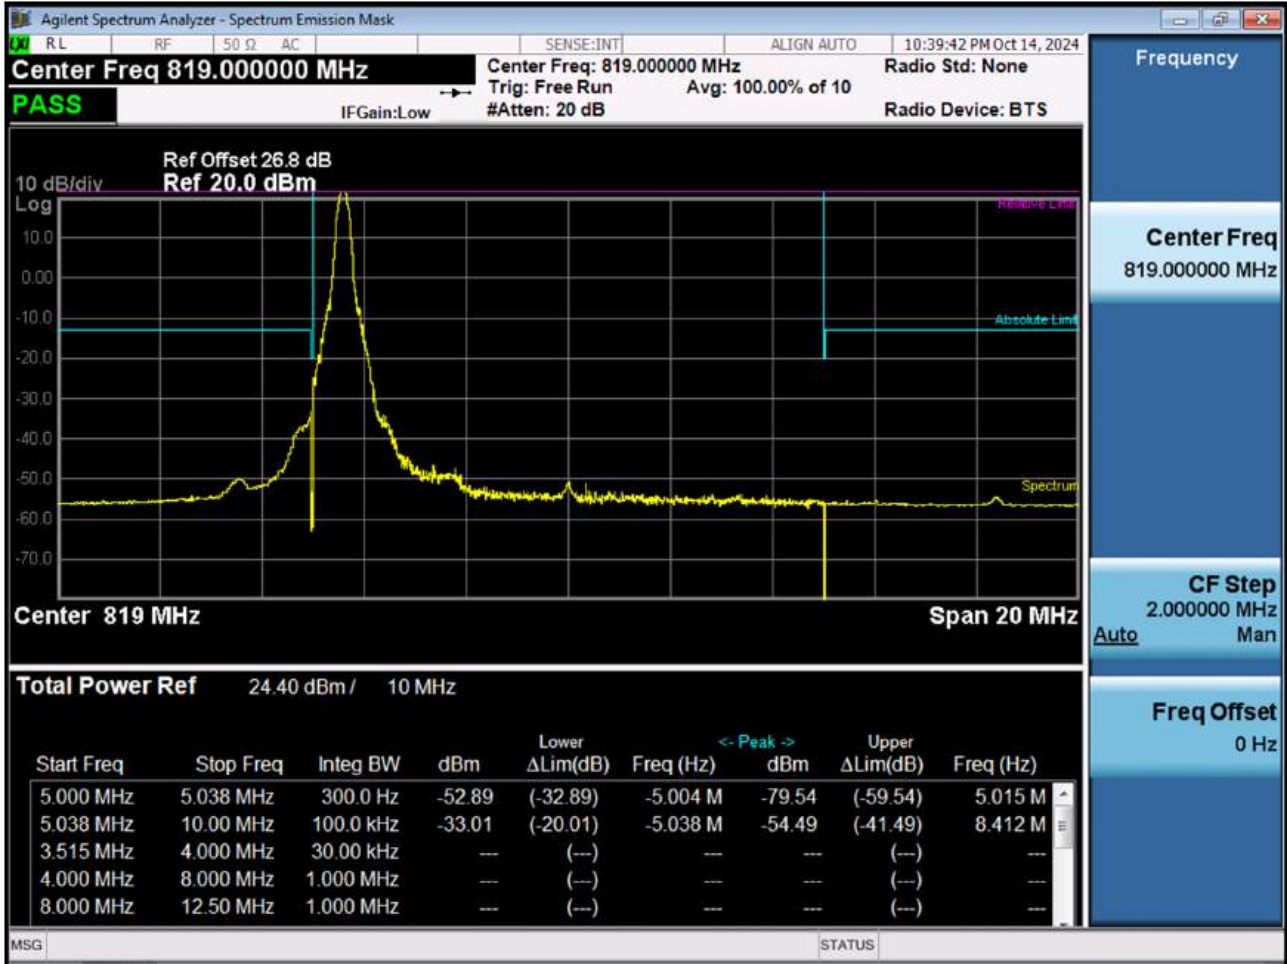


BAND 26. Low Channel Edge Plot (10 M BW Ch.26740 QPSK_RB50_Offset 0)



BAND 26. Mid Channel Edge Plot (10 M BW Ch. 26740 QPSK_RB1_Offset 49)

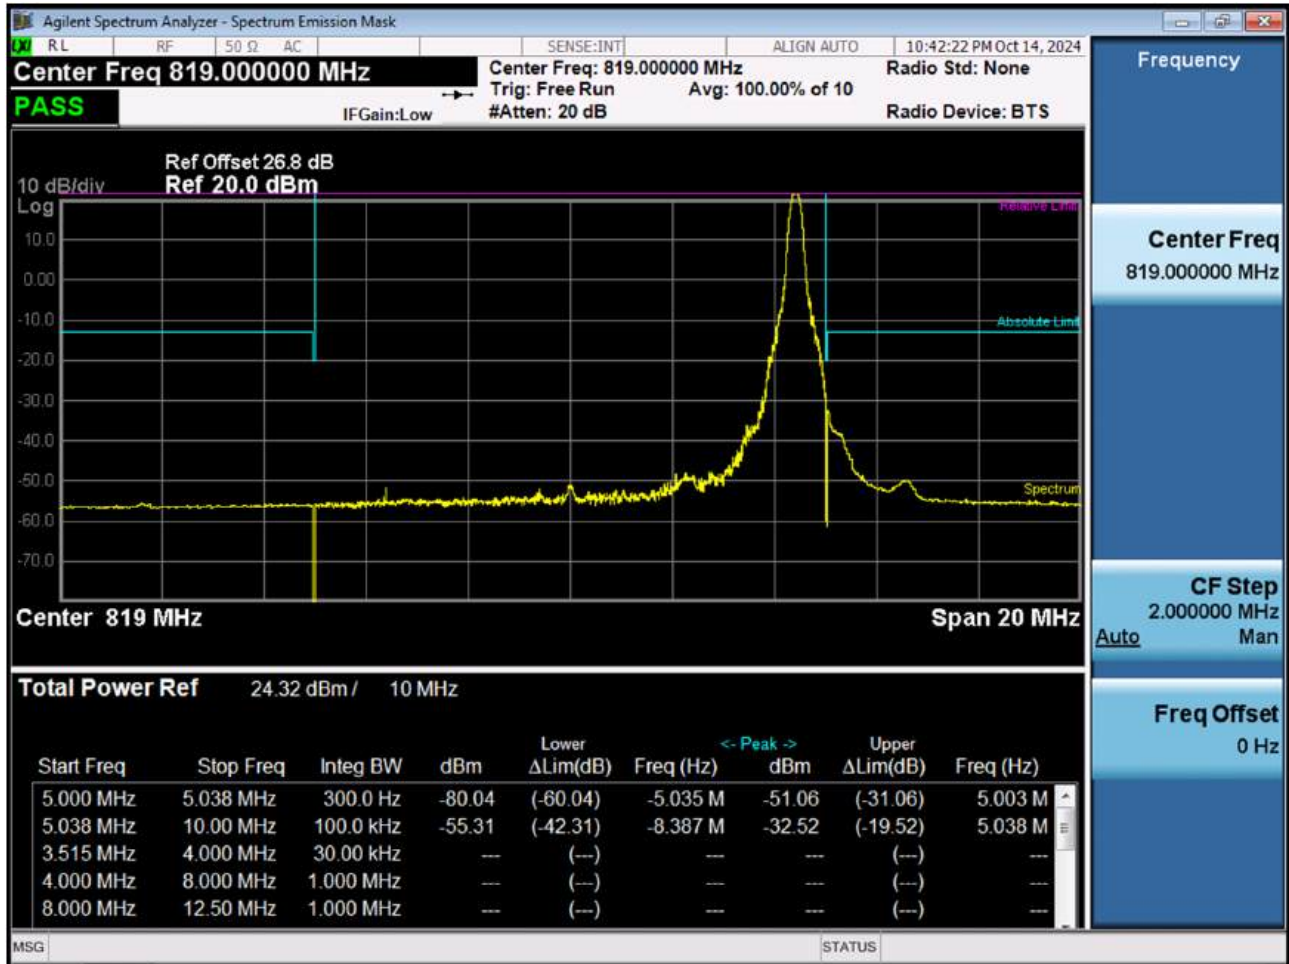


BAND 26. Low Channel Edge Plot (15 M BW Ch.26765 QPSK RB 1, Offset 0)

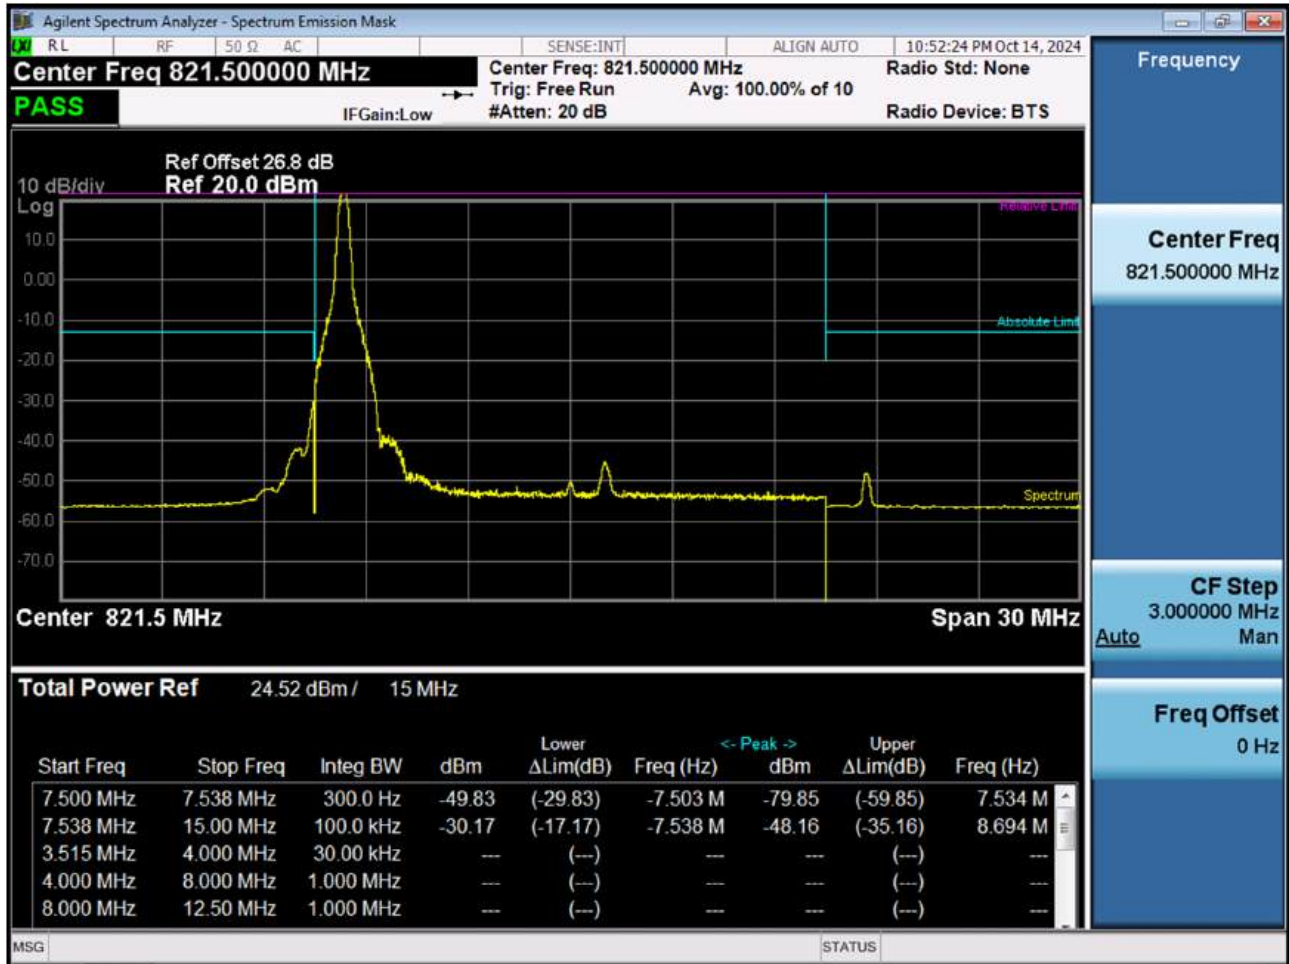

BAND 26. Low Channel Edge Plot (15 M BW Ch.26765 QPSK RB 75, Offset0)



BAND 26. Mid Channel Edge Plot (15 M BW Ch.26765 QPSK_RB1_Offset 74)

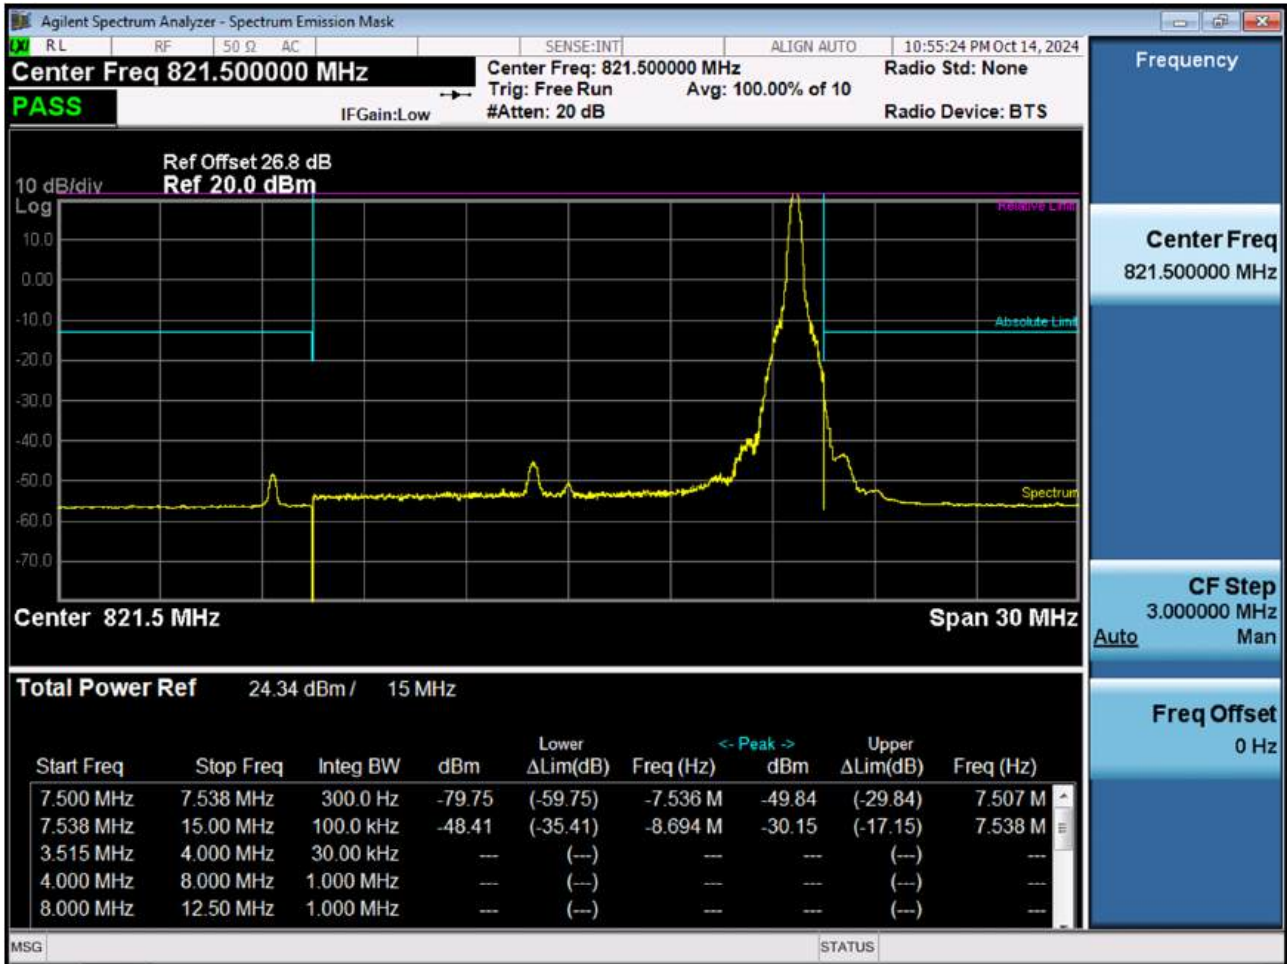


BAND 26. Mid Band Edge Plot (15 M BW Ch.26765 QPSK RB 1, Offset74)



BAND 26. Mid Band Edge Plot (15 M BW Ch.26765 QPSK_RB75_Offset 0)




BAND 26. Upper Channel Edge Plot (1.4 M BW Ch.26783 QPSK_RB1_Offset 5)

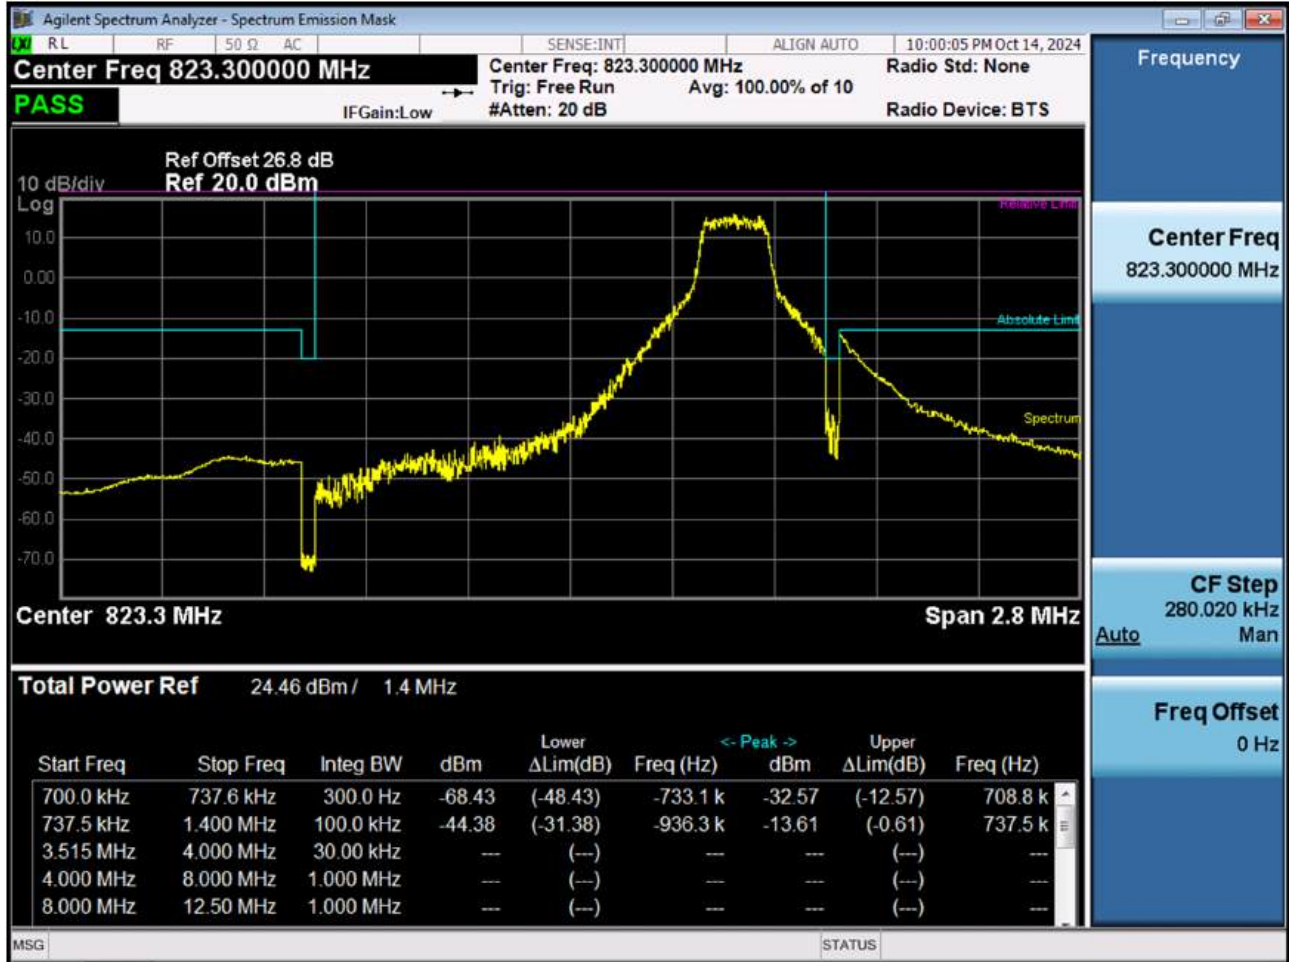

BAND 26. Upper Channel Edge Plot (1.4 M BW Ch.26783 QPSK_RB6_Offset 0)




BAND 26. Upper Channel Edge Plot (3 M BW Ch.26775 QPSK_RB1_Offset 14)

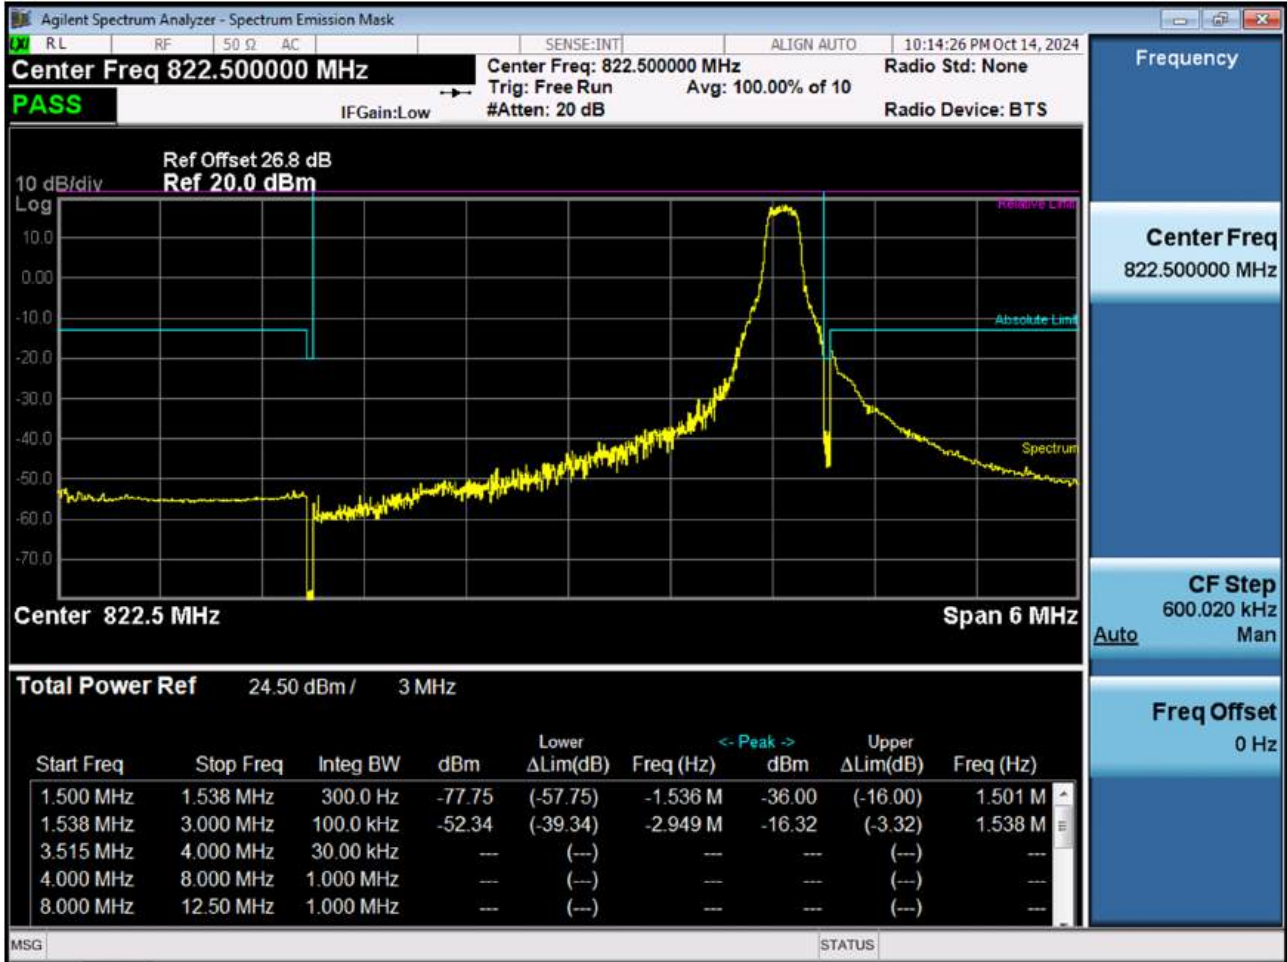

BAND 26. Upper Channel Edge Plot (3 M BW Ch.26775 QPSK_RB15_Offset 0)




BAND 26. Upper Channel Edge Plot (5 M BW Ch.26765 QPSK_RB1_Offset 24)

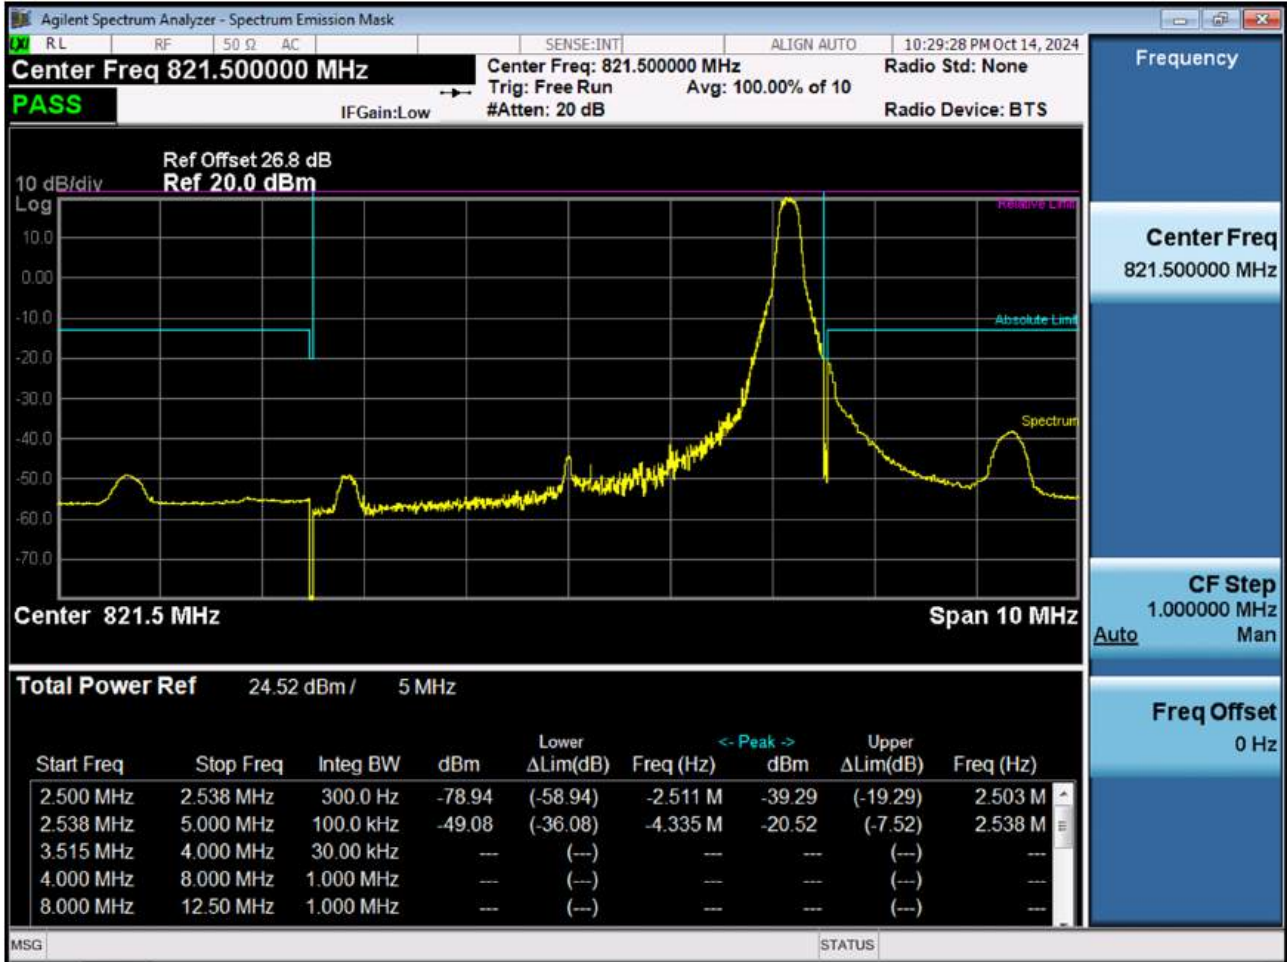


BAND 26. Upper Channel Edge Plot (5 M BW Ch.26765 QPSK_RB25_Offset 0)




BAND 26. Conducted Spurious (26697 ch_1.4 MHz_QPSK_RB 1_0)

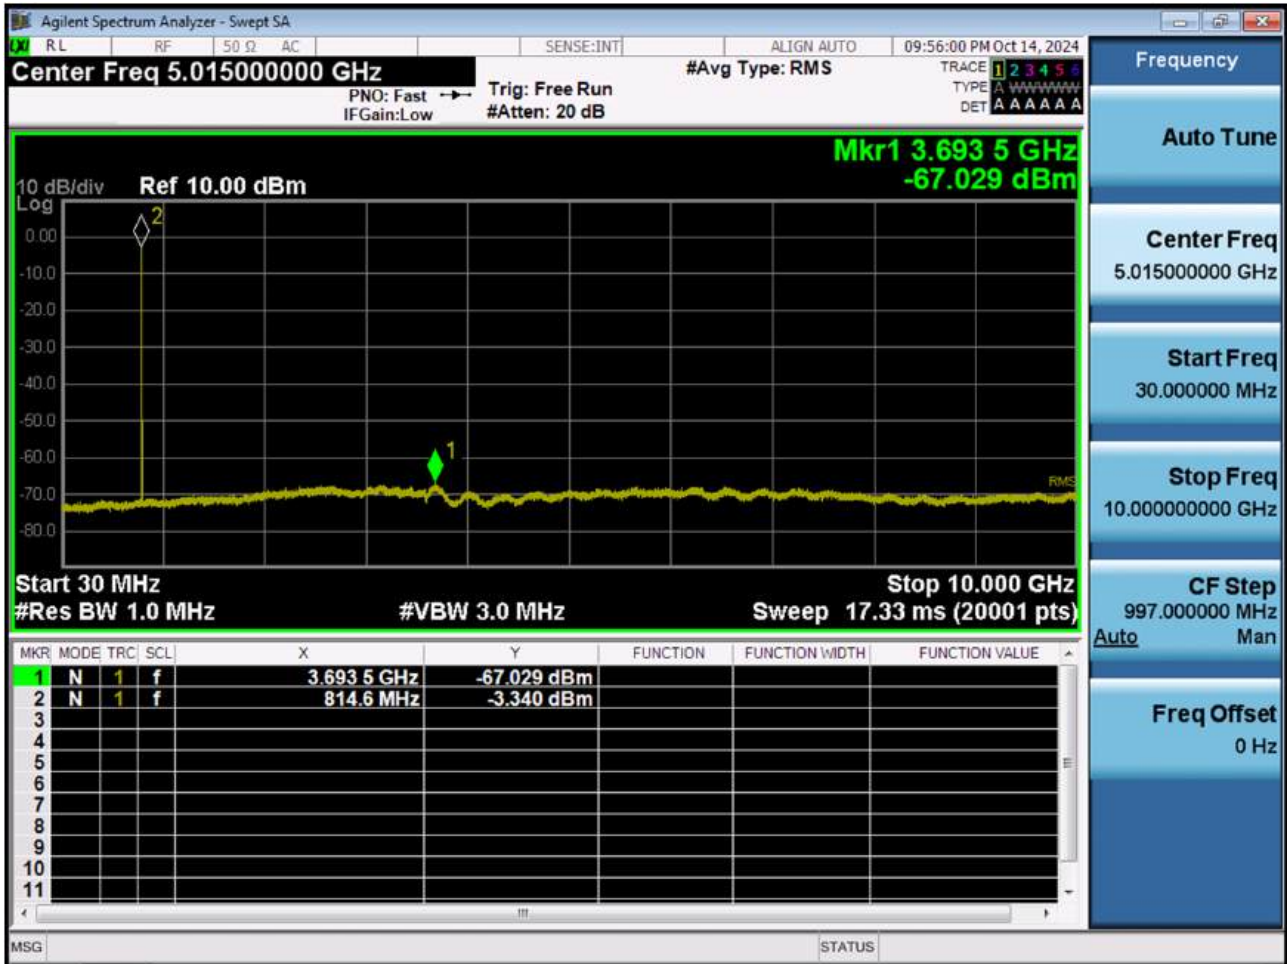


BAND 26. Conducted Spurious (26783 ch_1.4 MHz_QPSK_RB 1_0)

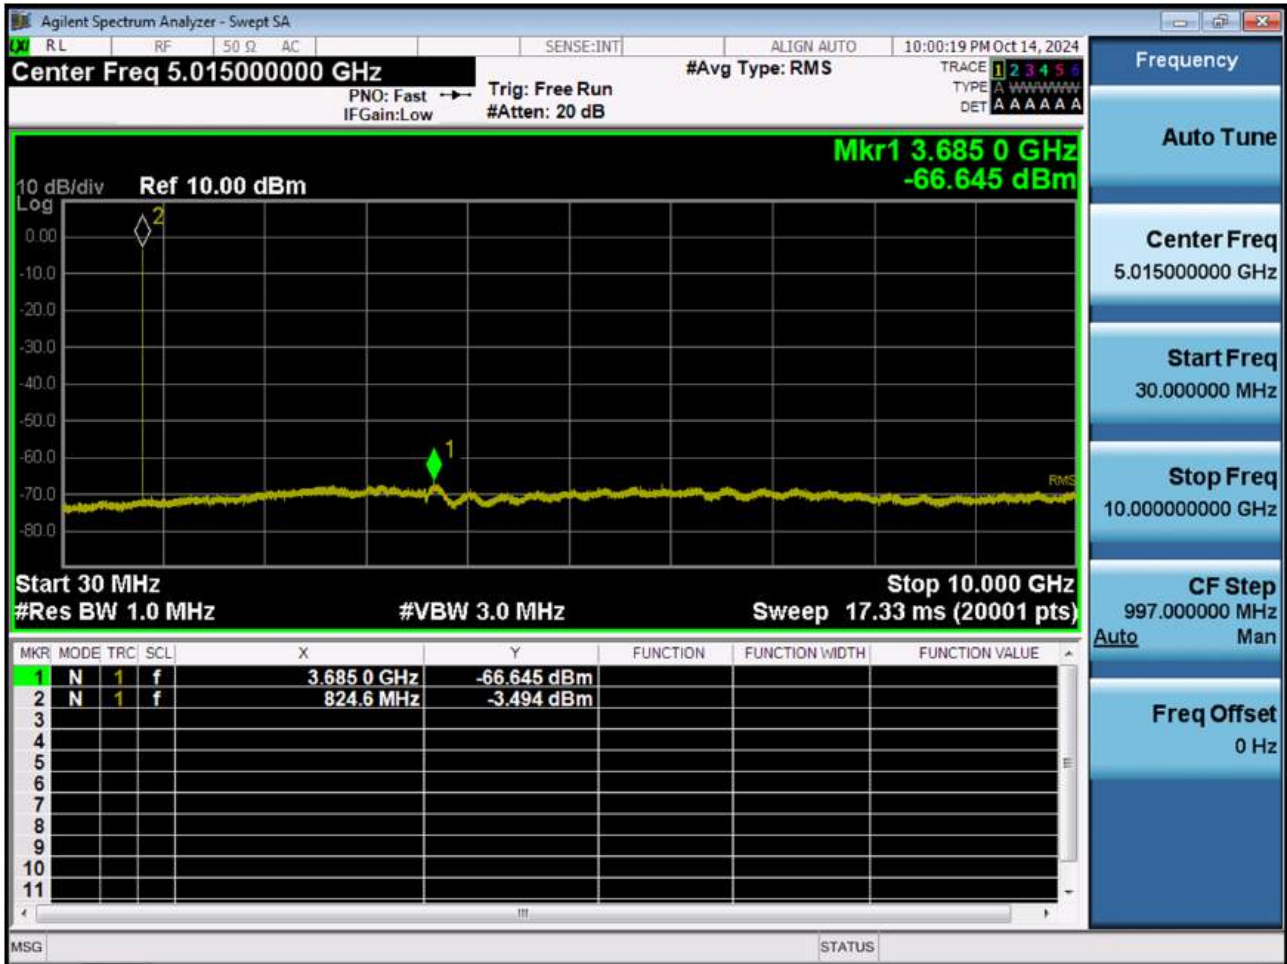


BAND 26. Conducted Spurious (26705 ch_3 MHz_QPSK_RB 1_0)

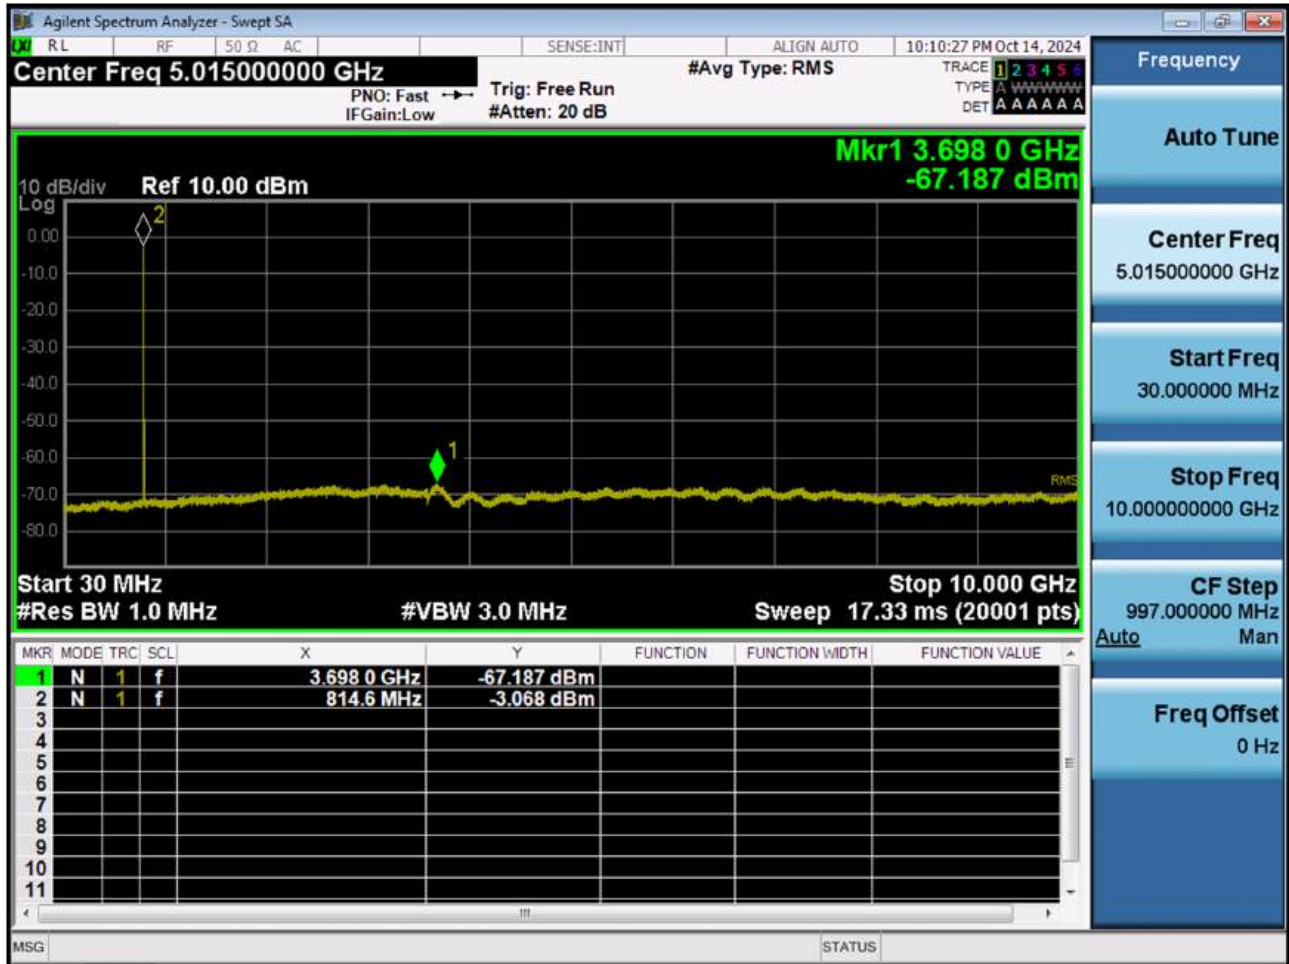


BAND 26. Conducted Spurious (26775 ch_3 MHz_QPSK_RB 1_0)

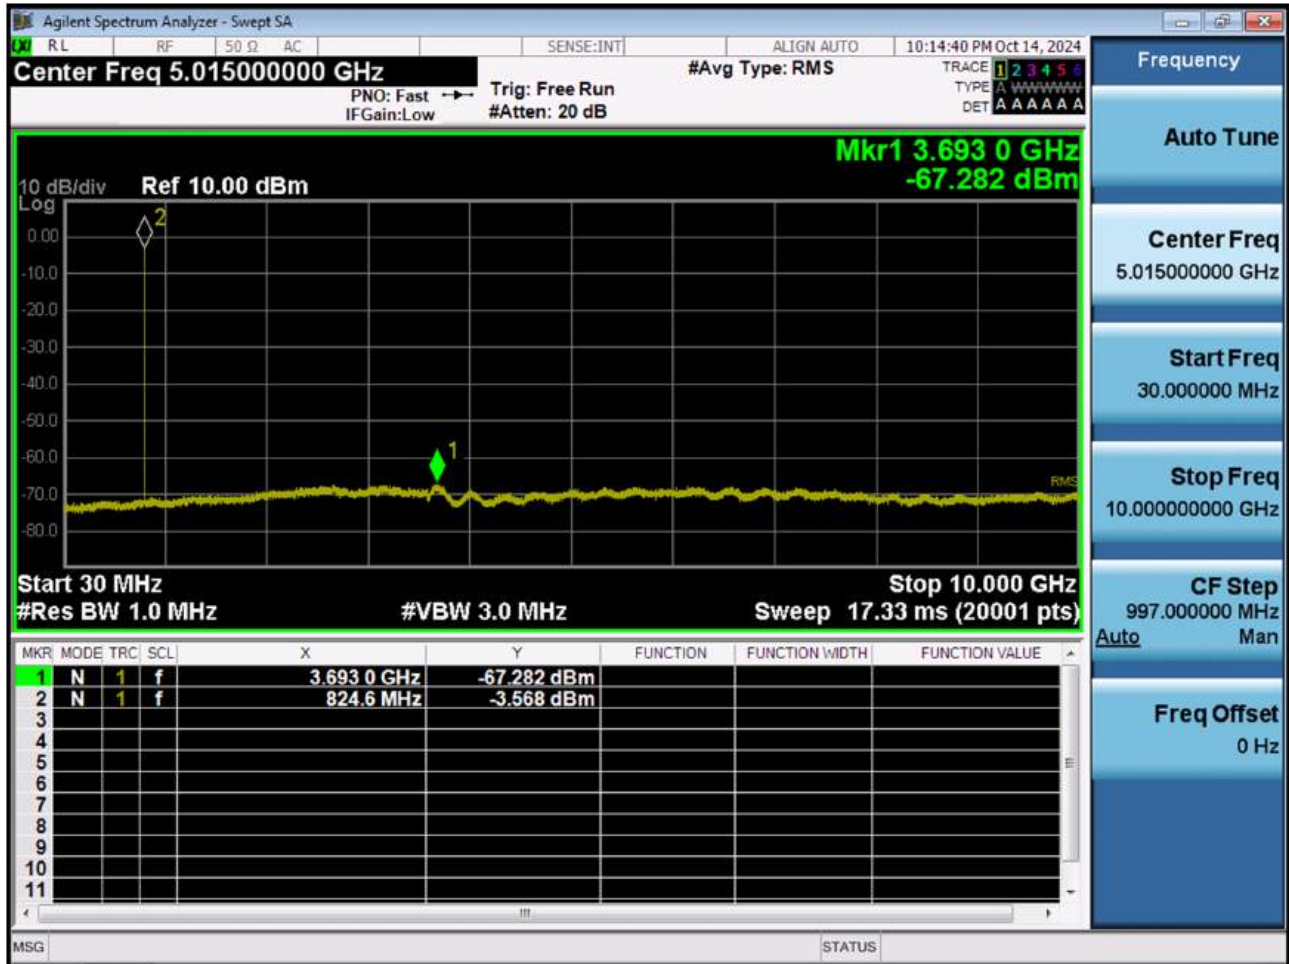


BAND 26. Conducted Spurious (26715 ch_5 MHz_QPSK_RB 1_0)

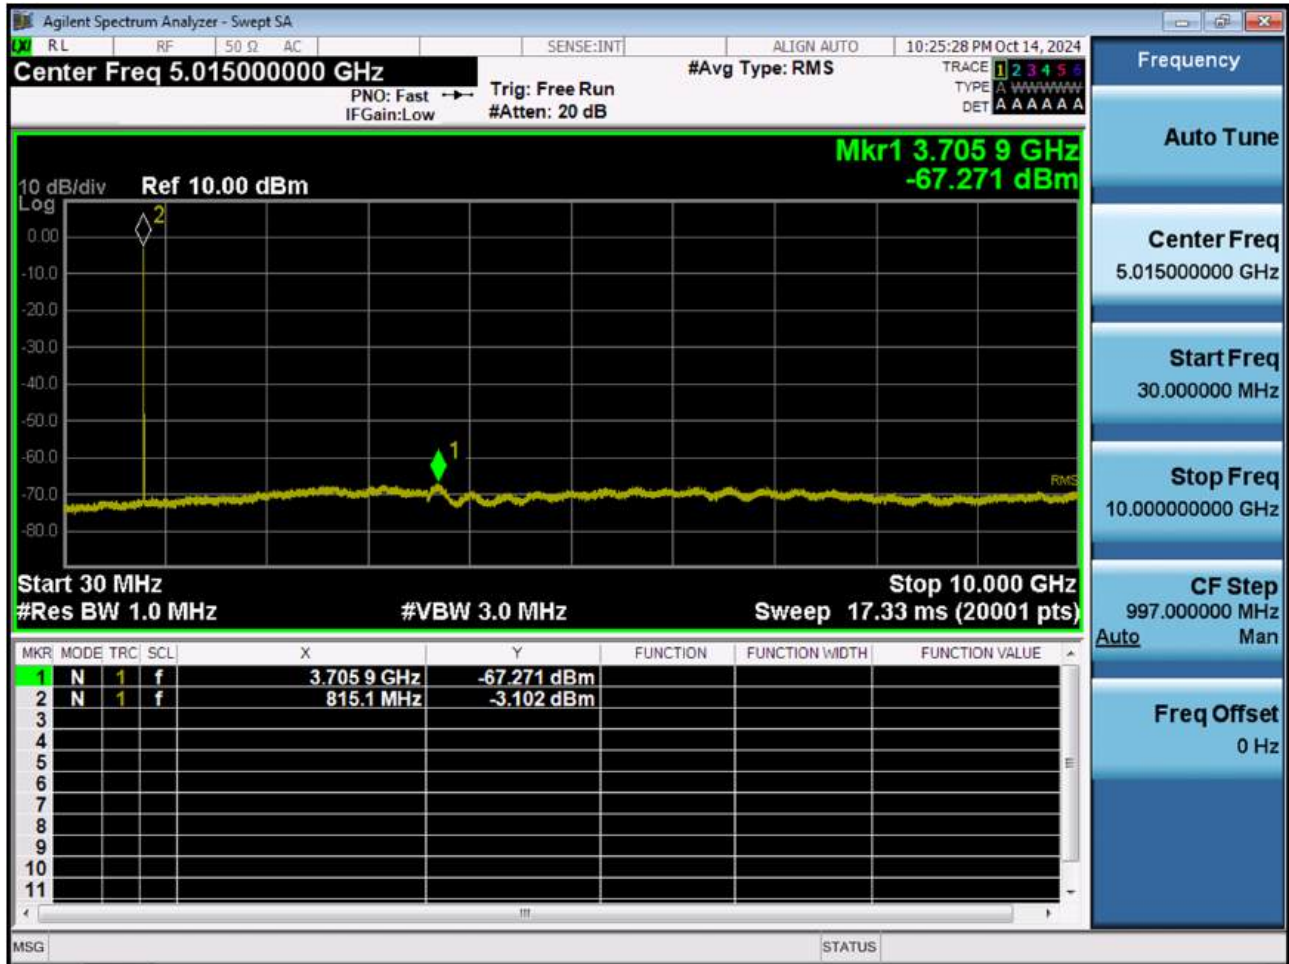


BAND 26. Conducted Spurious (26765 ch_5 MHz_QPSK_RB 1_0)

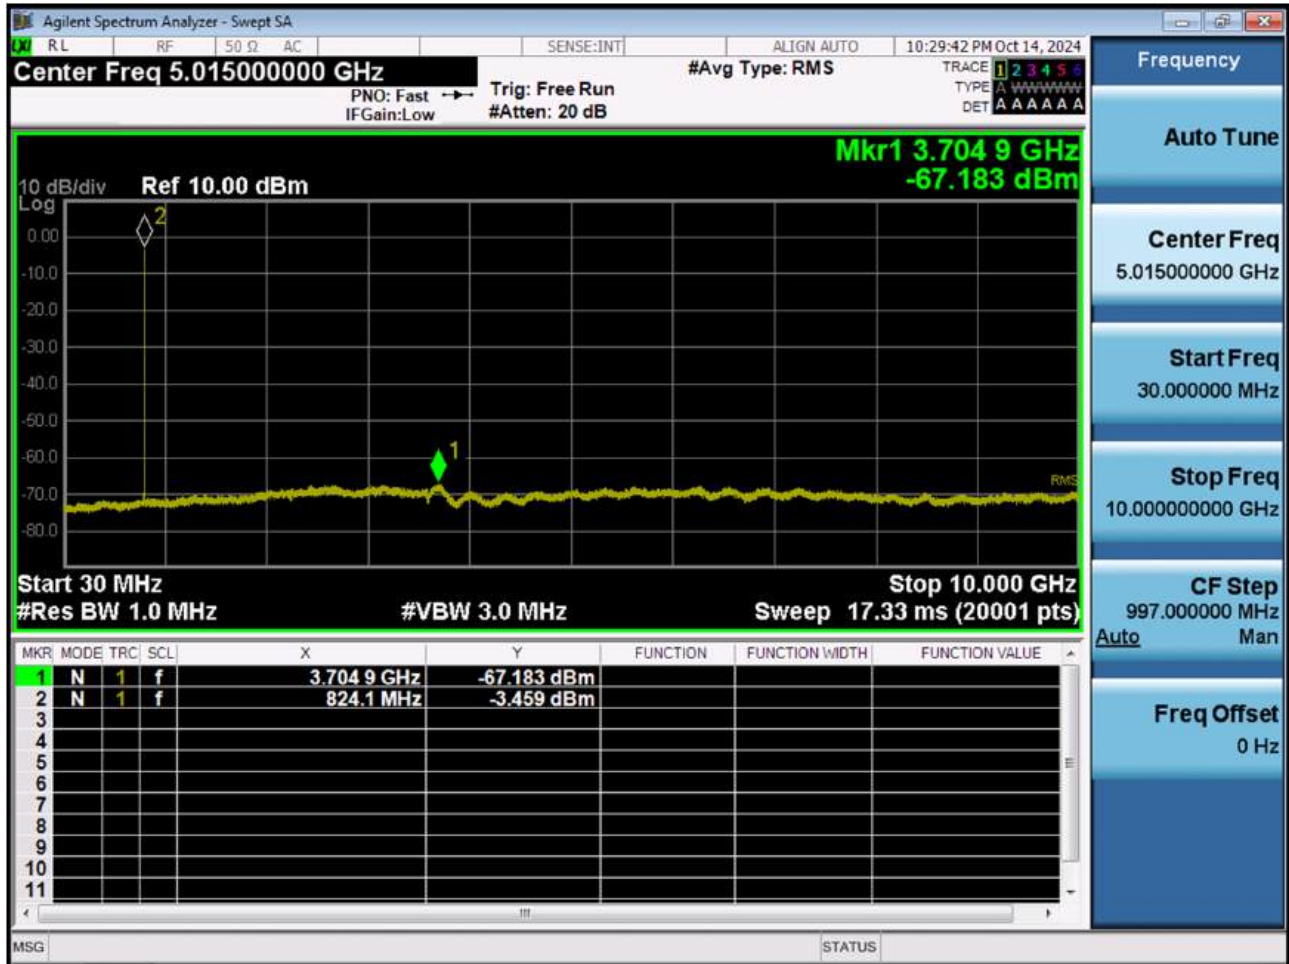

BAND 26. Conducted Spurious (26740 ch_10 MHz_QPSK_RB 1_0)

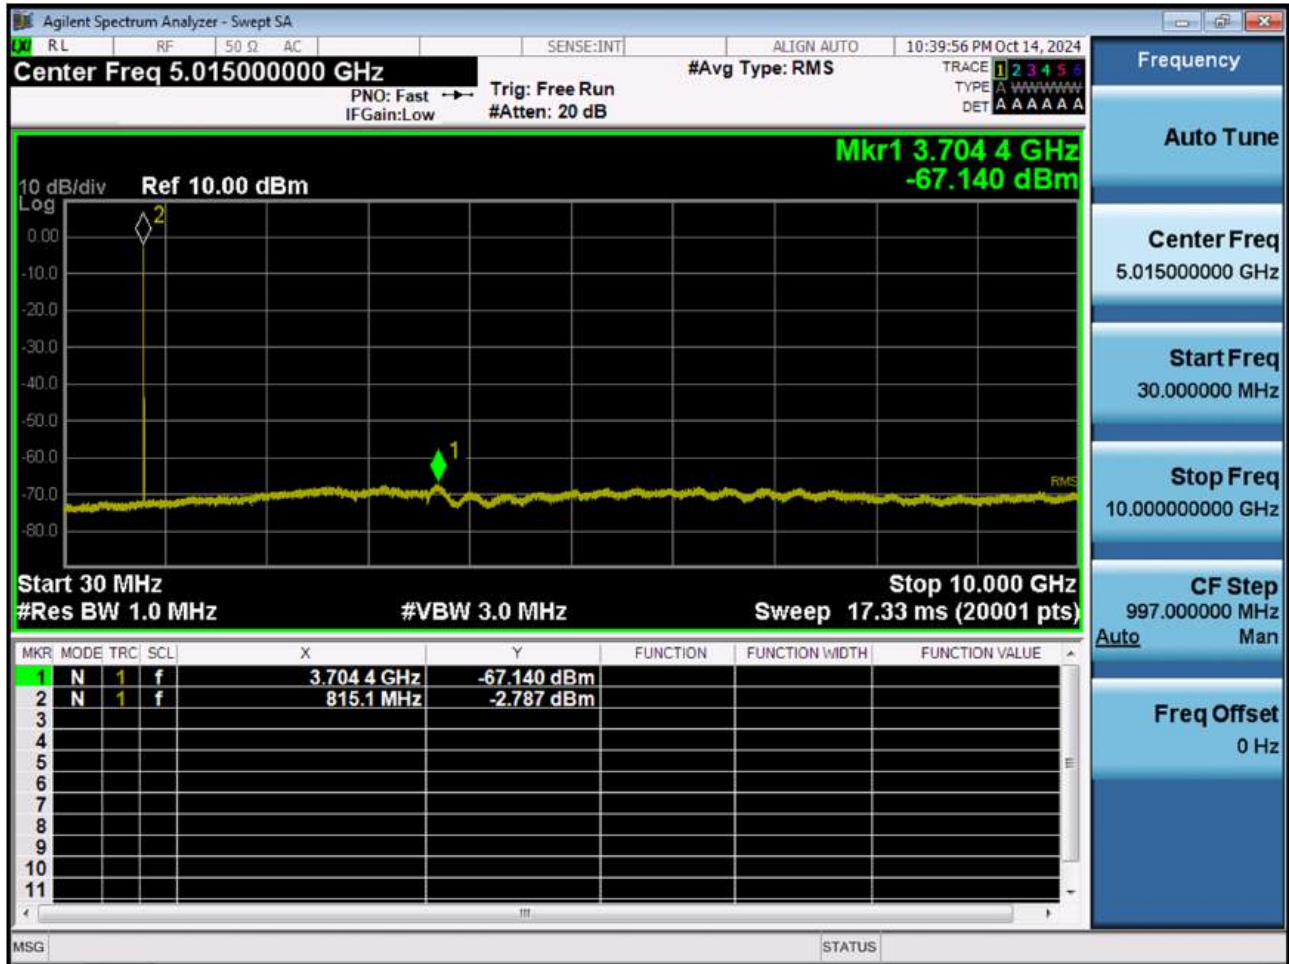


BAND 26. Conducted Spurious (26765 ch_15 MHz_QPSK_RB 1_0)

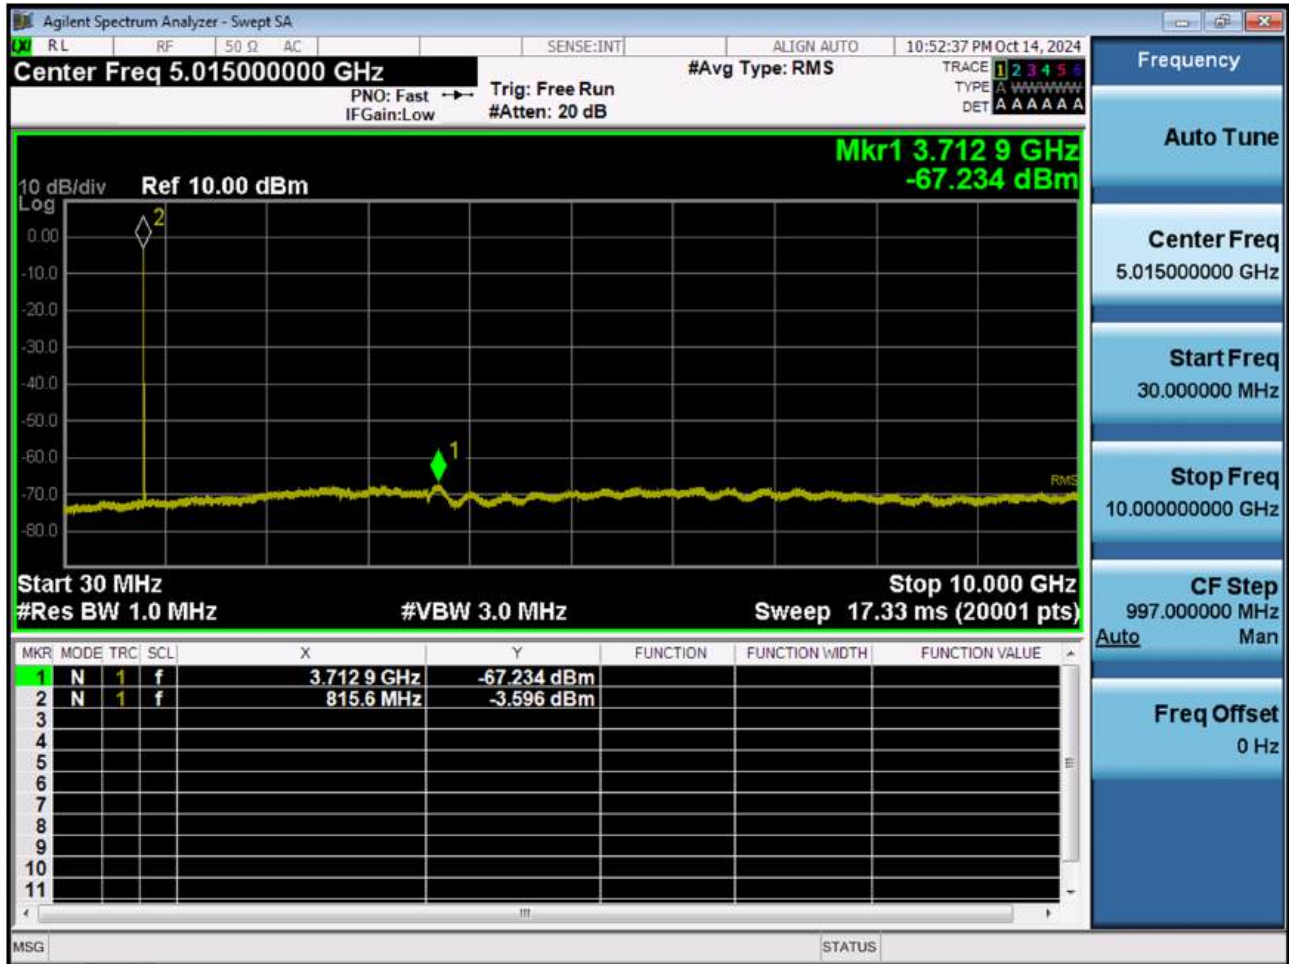


11. TEST PLOTS (STRADDLE CHANNEL)


BAND 26. Conducted Spurious (1.4 MHz_QPSK_RB 1_0)

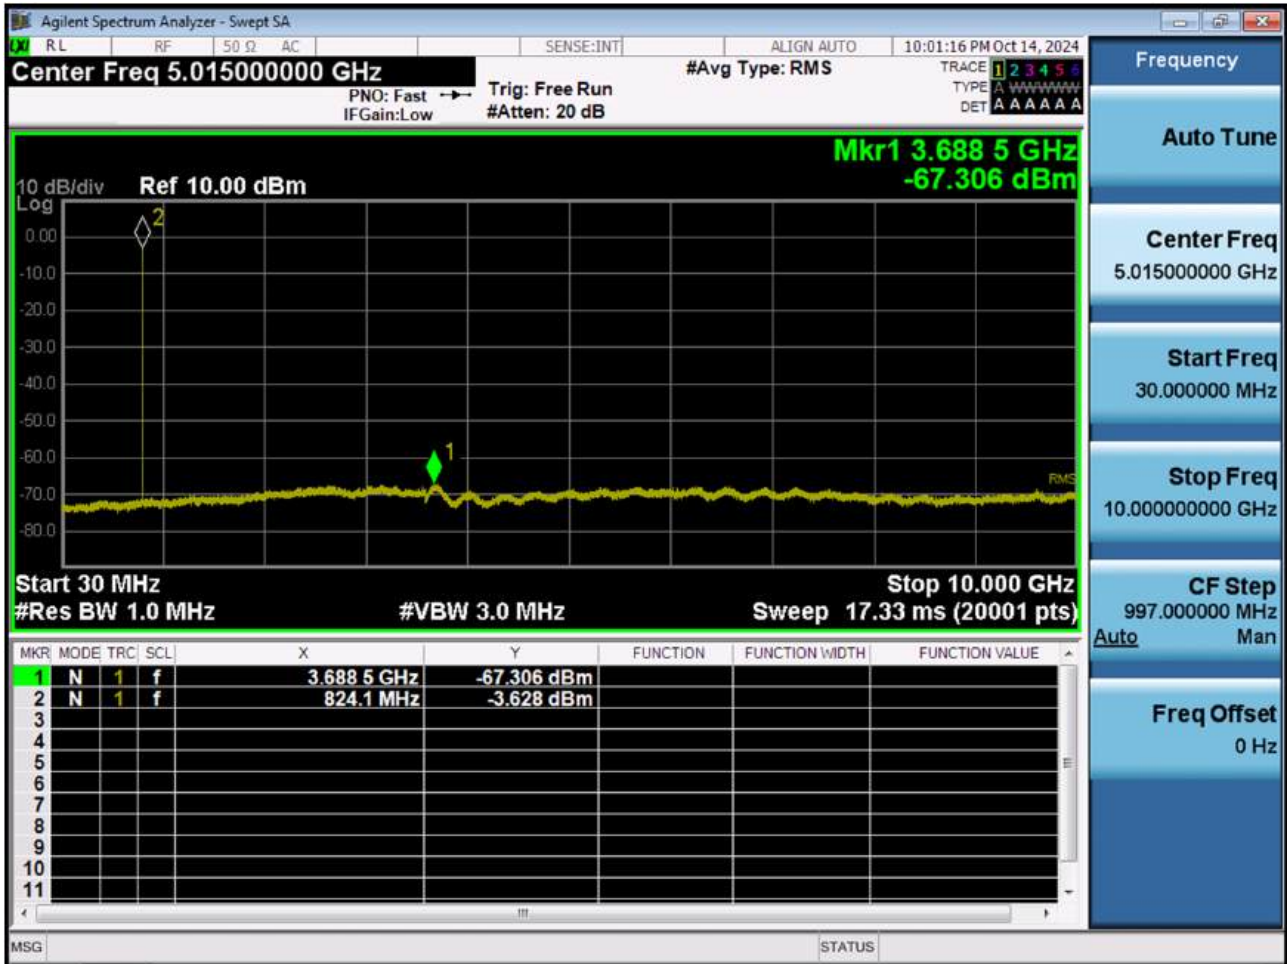


BAND 26. Conducted Spurious (3 MHz_QPSK_RB 1_0)

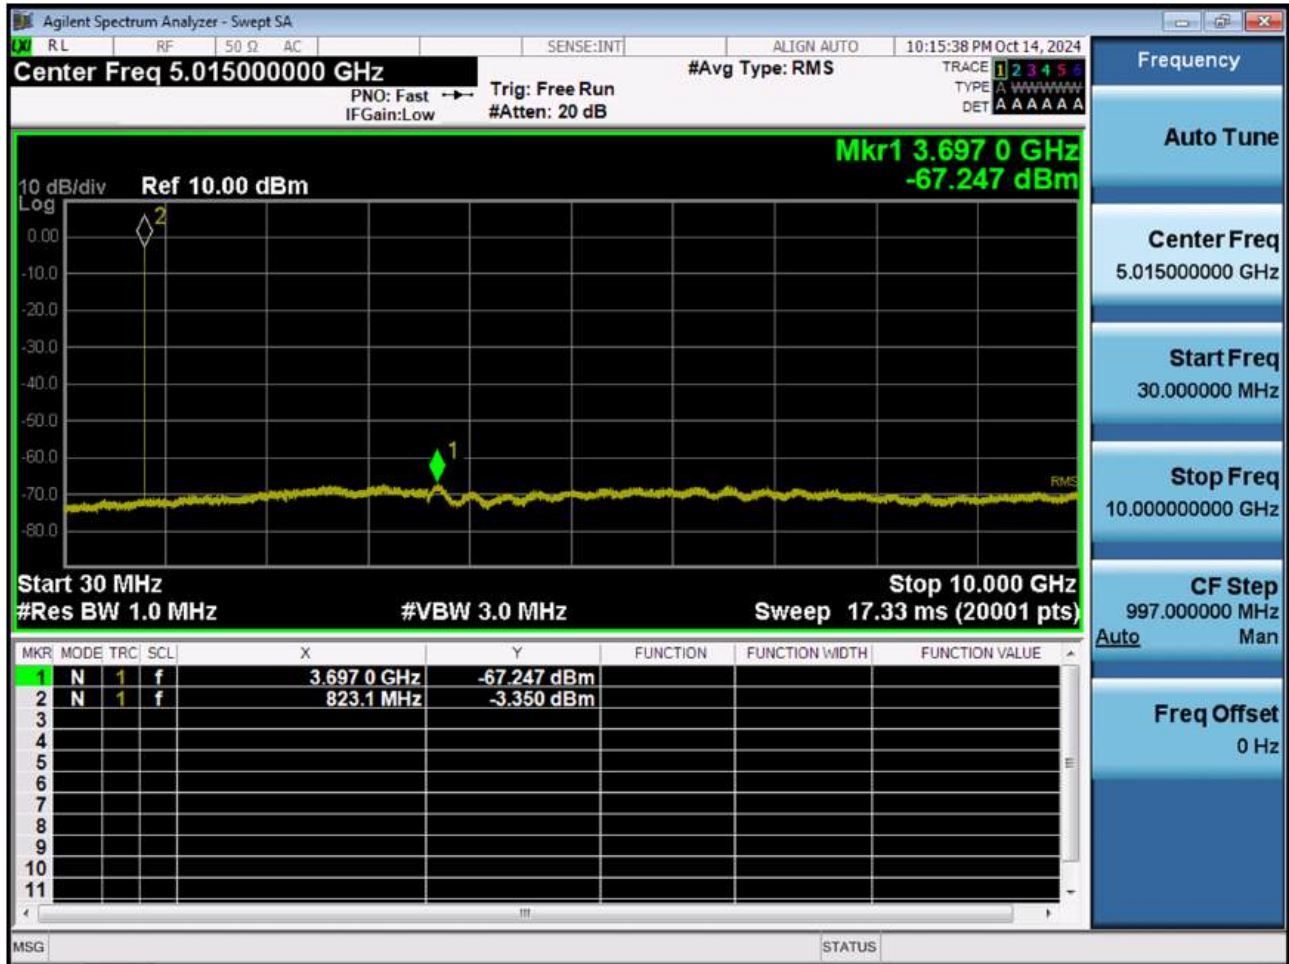


BAND 26. Conducted Spurious (5 MHz_QPSK_RB 1_0)

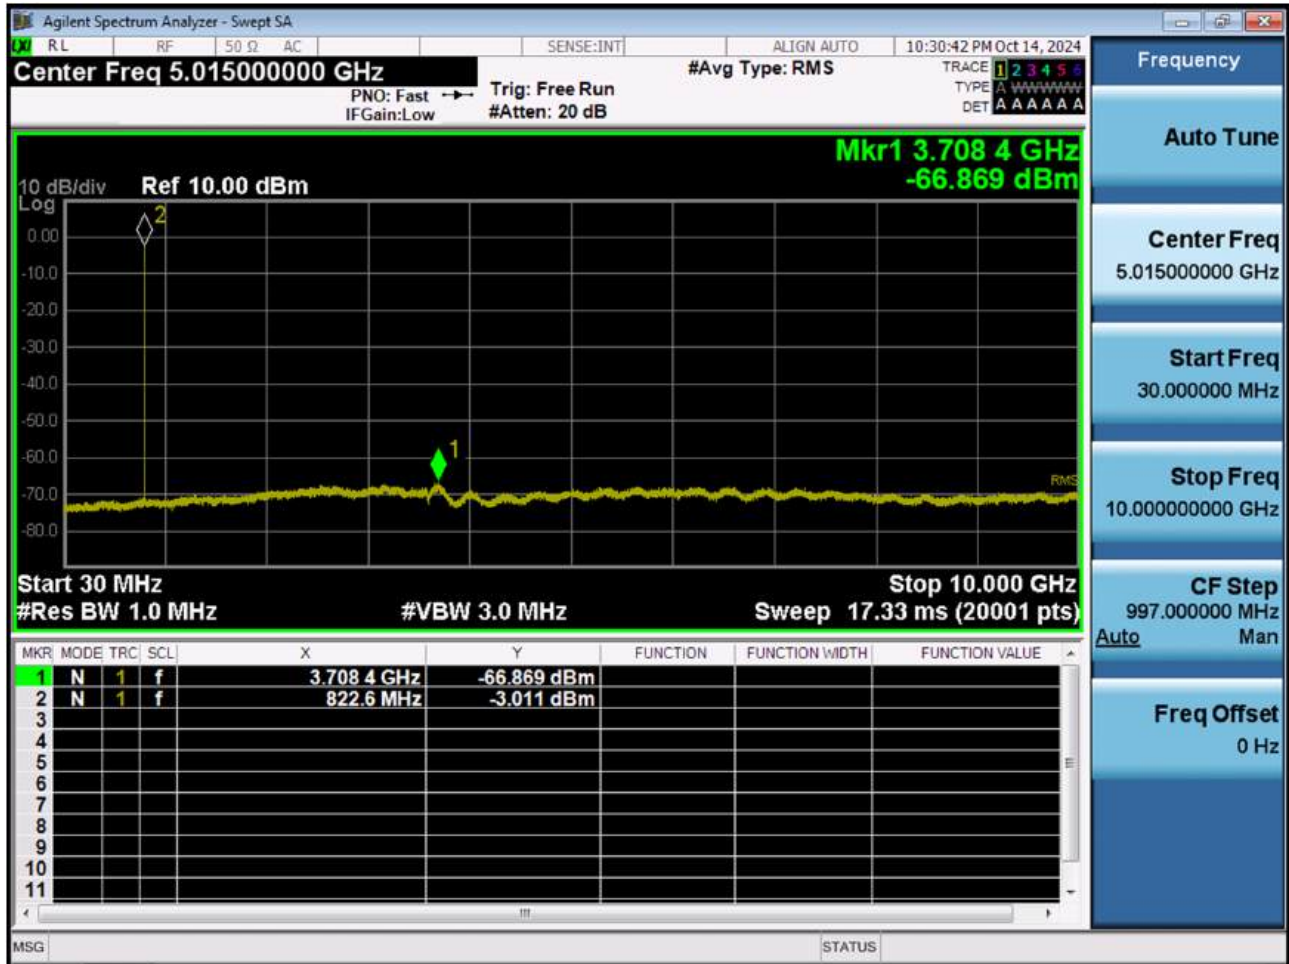


BAND 26. Conducted Spurious (10 MHz_QPSK_RB 1_0)

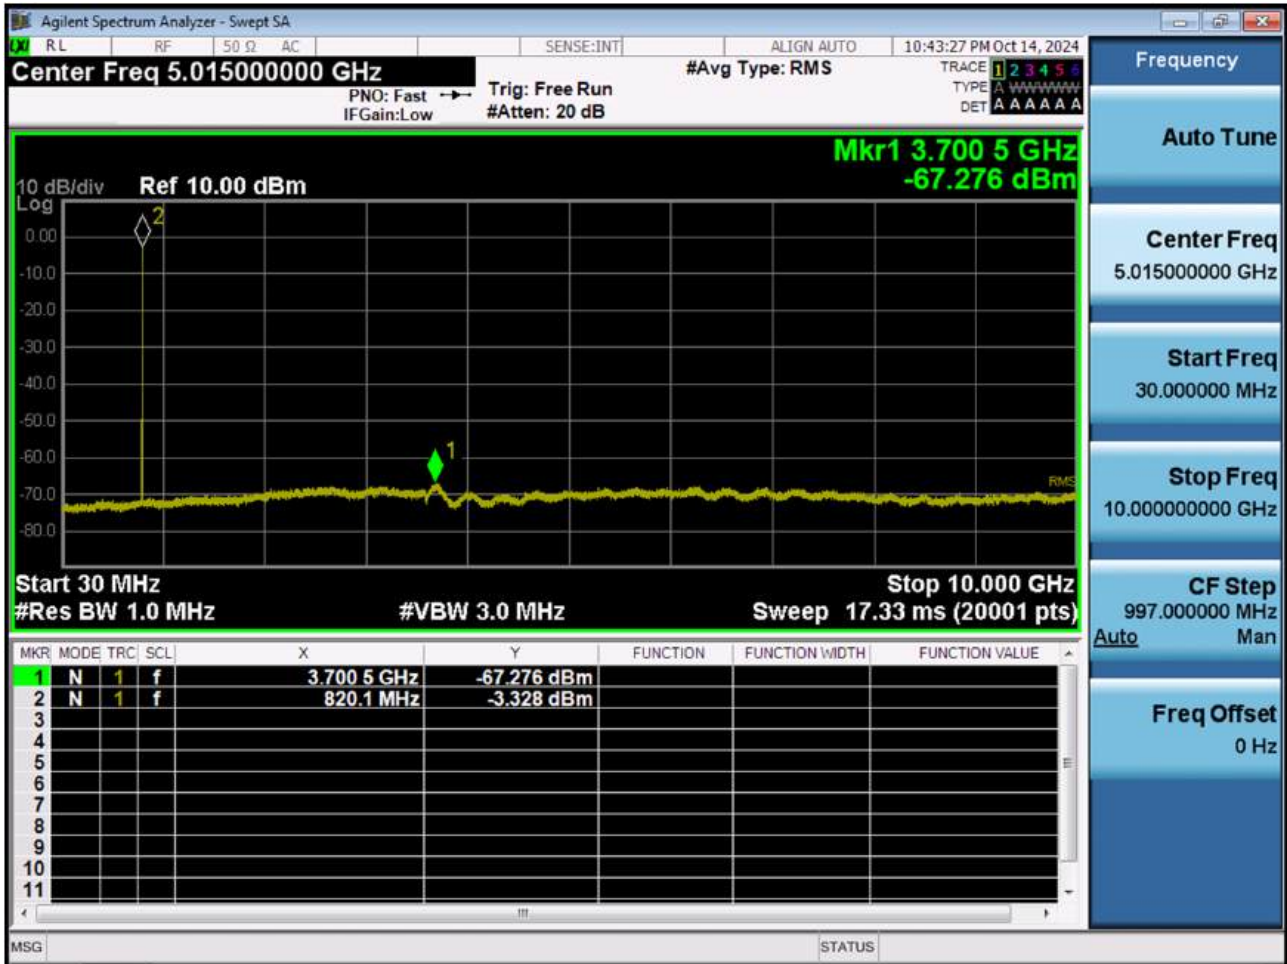

BAND 26. Channel Edge (1.4 MHz_QPSK_RB 1_0)

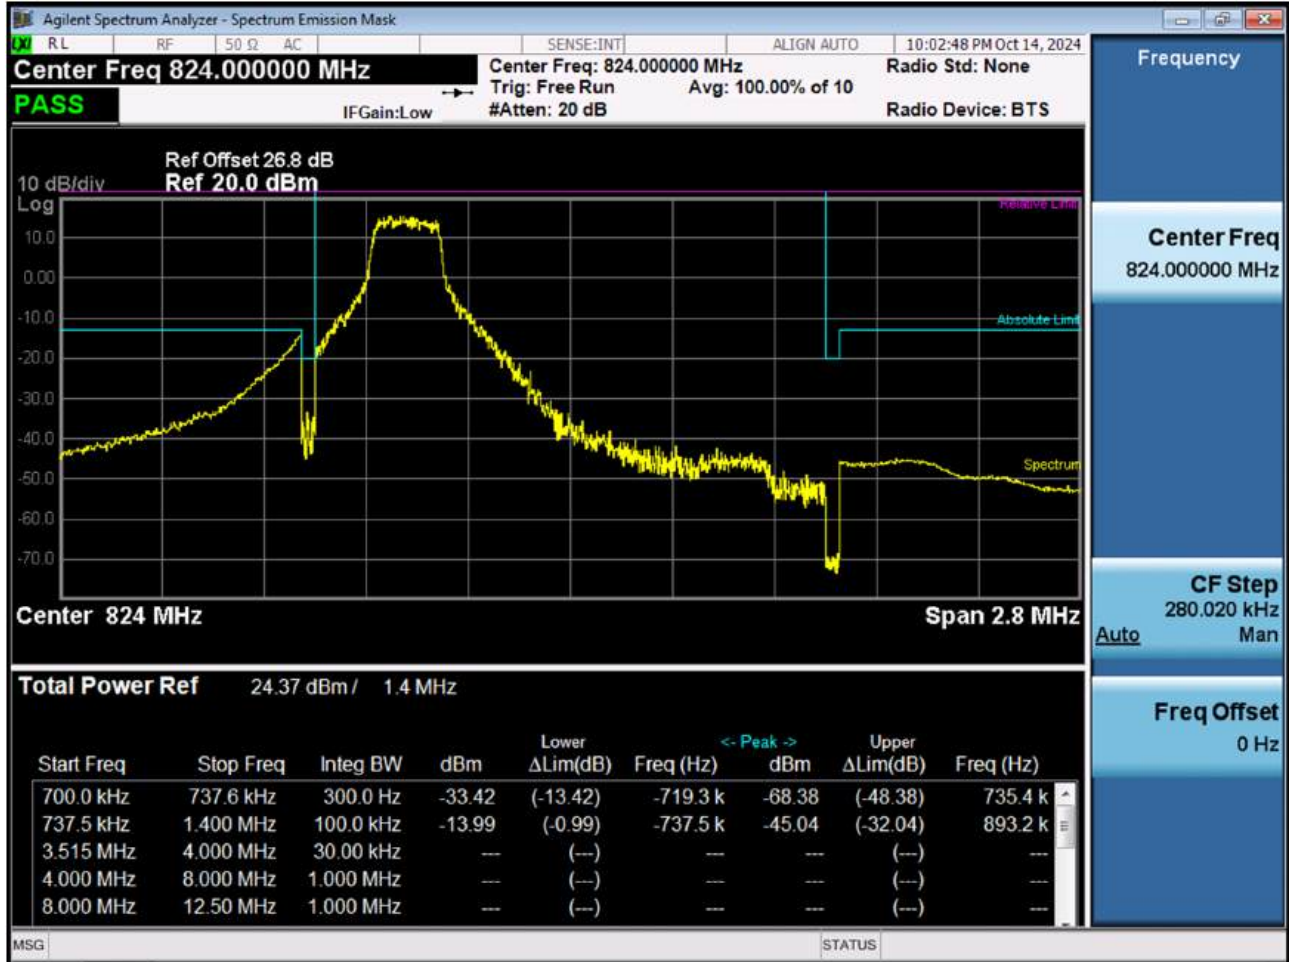


BAND 26. Channel Edge (1.4 MHz_QPSK_RB 1_5)

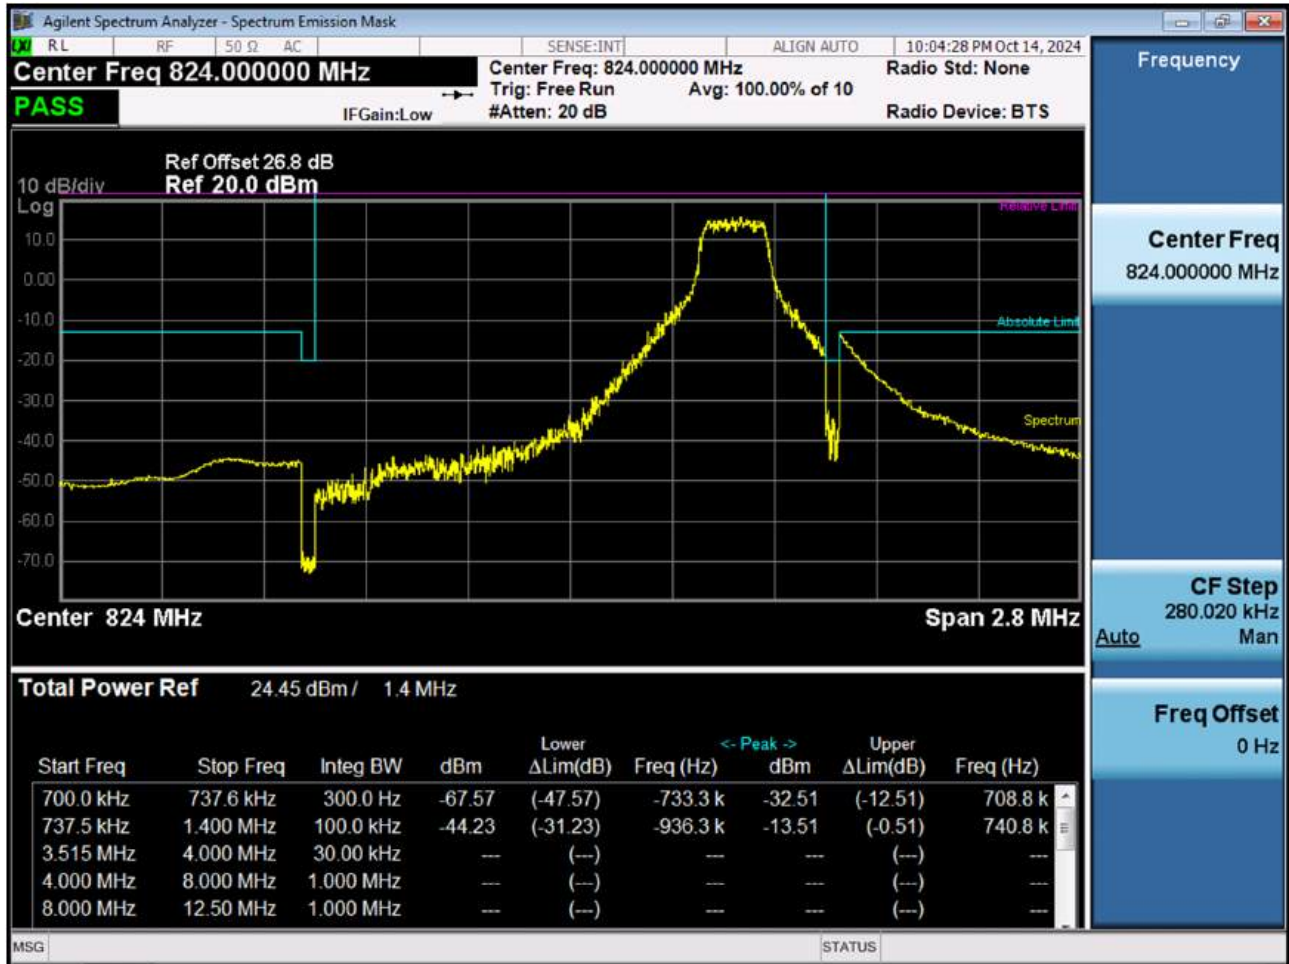


BAND 26. Channel Edge (1.4 MHz_QPSK_Full RB)



BAND 26. Channel Edge (3 MHz_QPSK_RB 1_0)

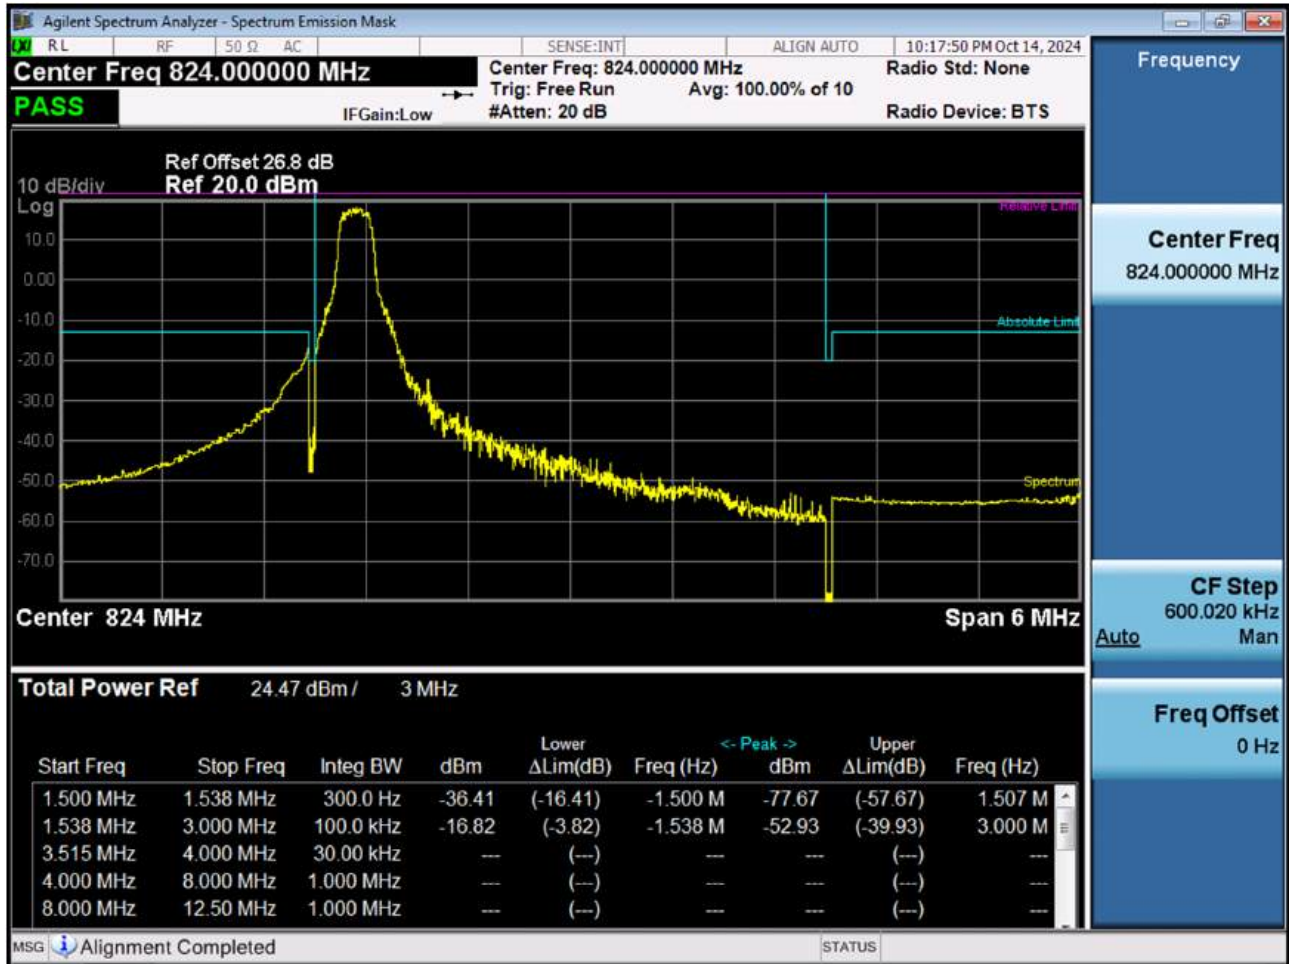


BAND 26. Channel Edge (3 MHz_QPSK_RB 1_14)

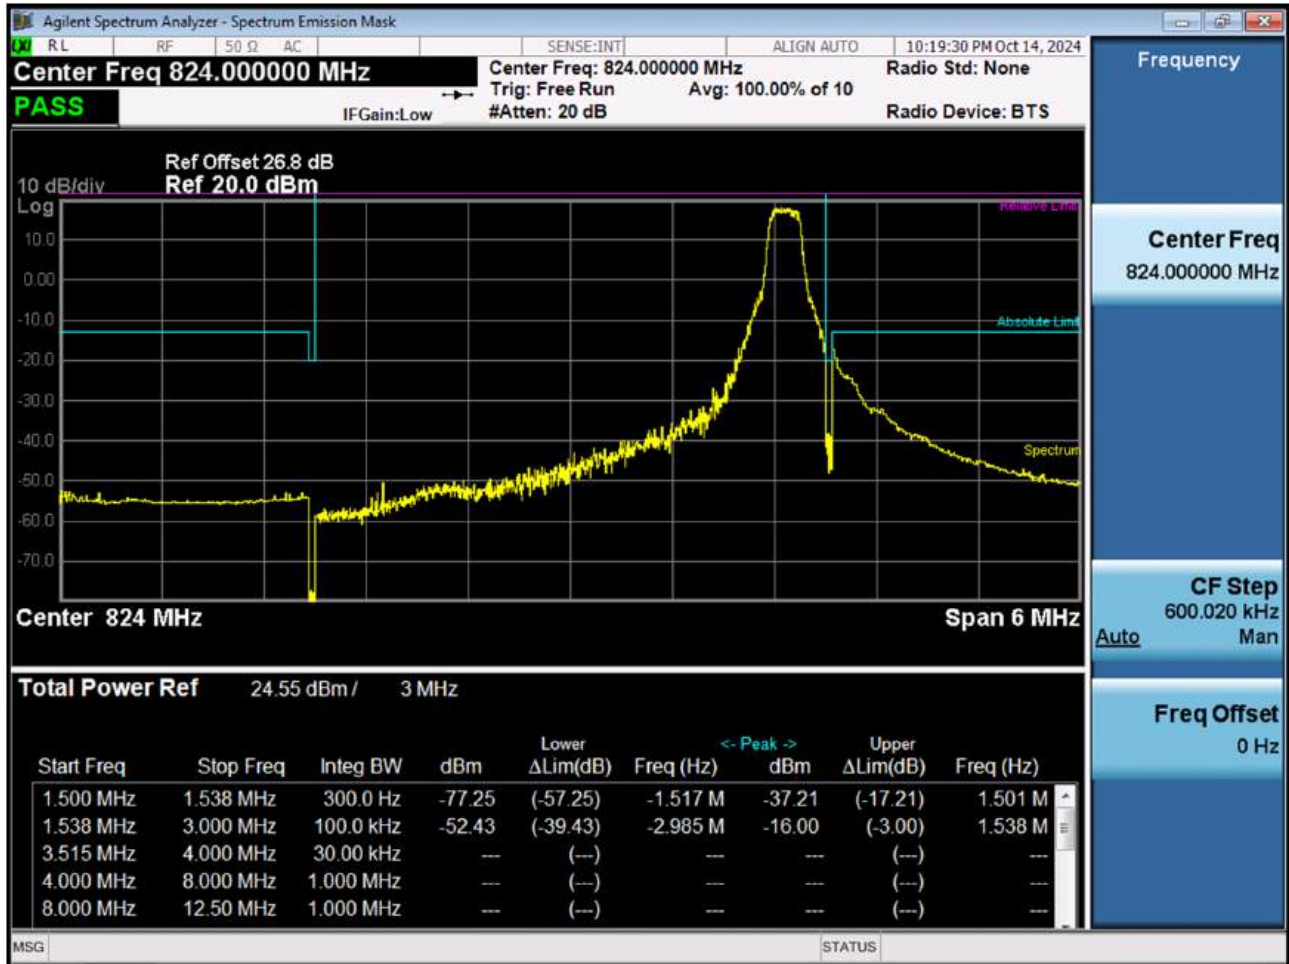


BAND 26. Channel Edge (3 MHz_QPSK_Full RB)



BAND 26. Channel Edge (5 MHz_QPSK_RB 1_0)

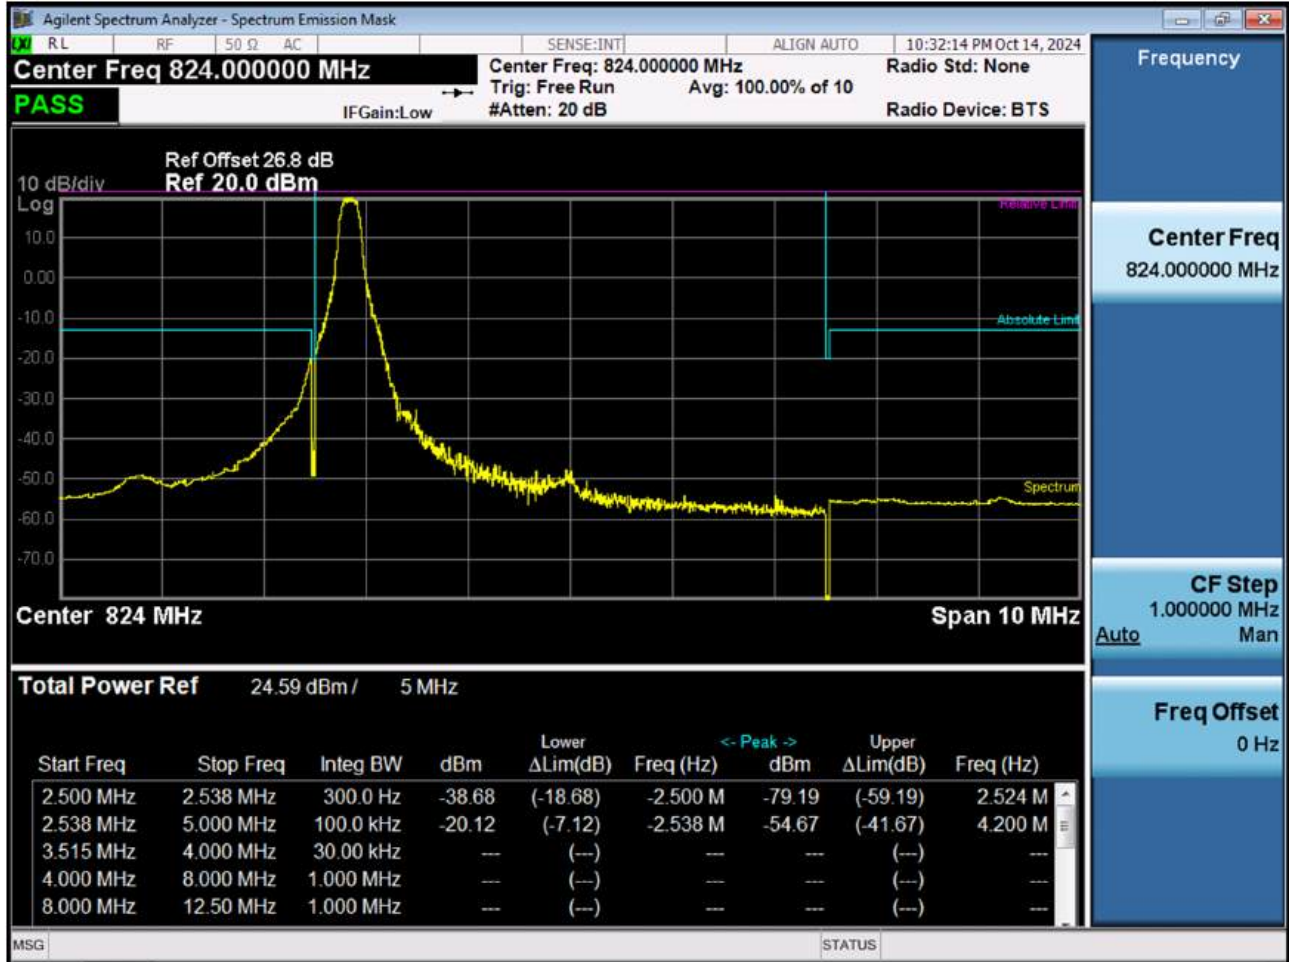


BAND 26. Channel Edge (5 MHz_QPSK_RB 1_24)

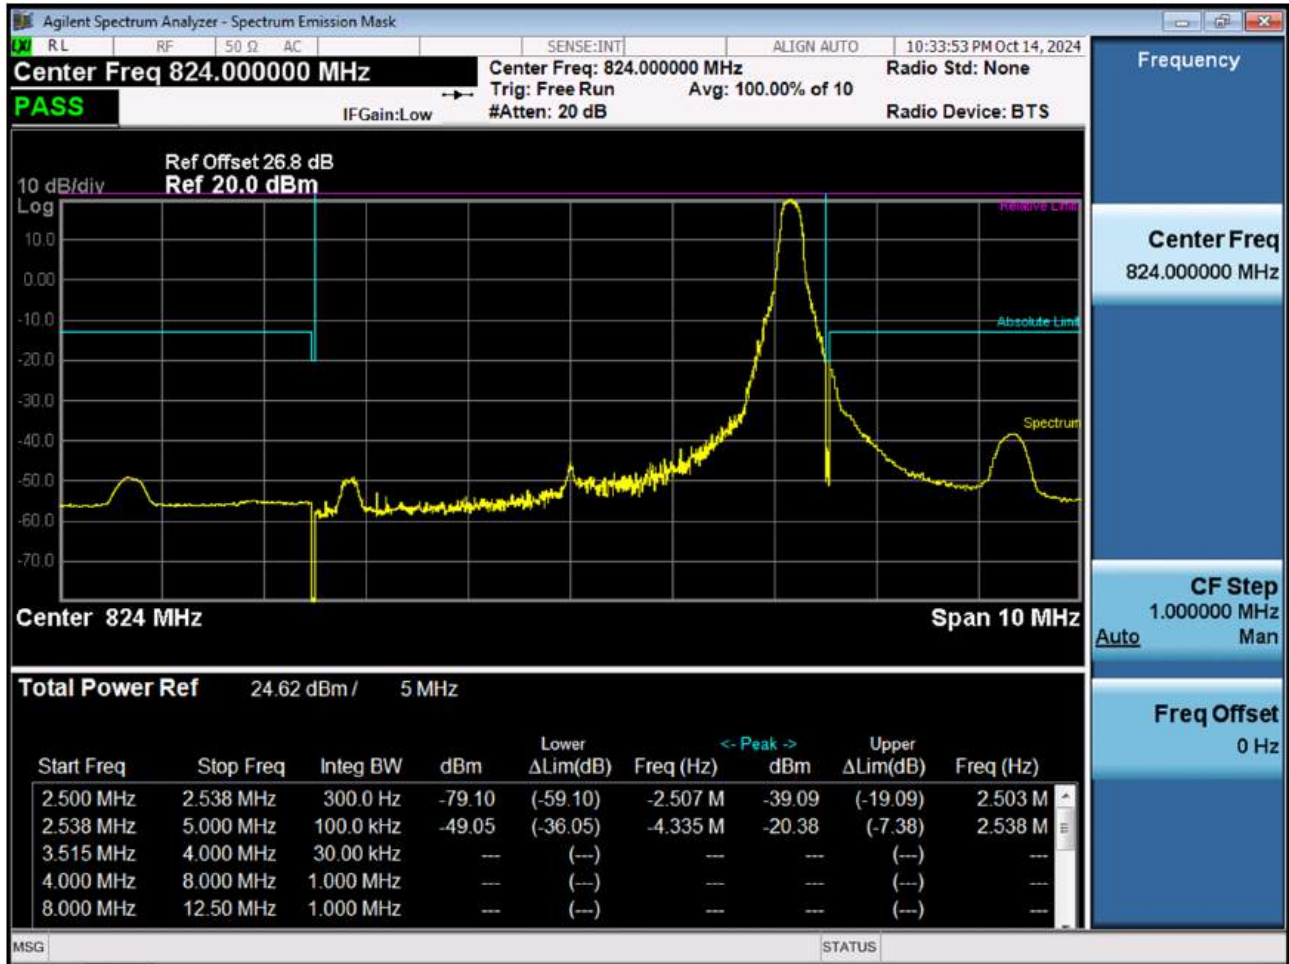


BAND 26. Channel Edge (5 MHz_QPSK_Full RB)



BAND 26. Channel Edge (10 MHz_QPSK_RB 1_0)

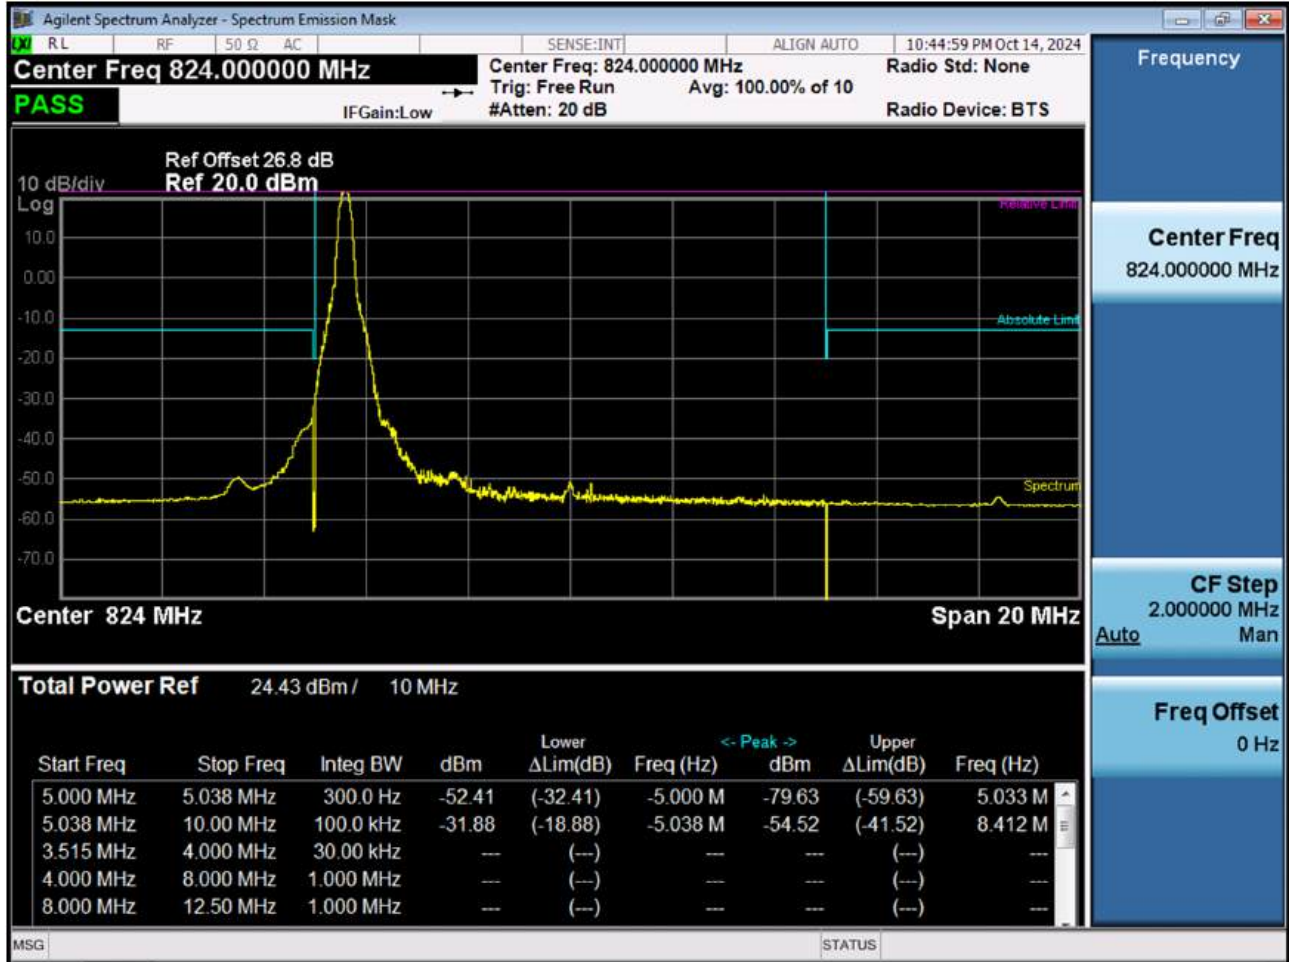

BAND 26. Channel Edge (10 MHz_QPSK_RB 1_49)

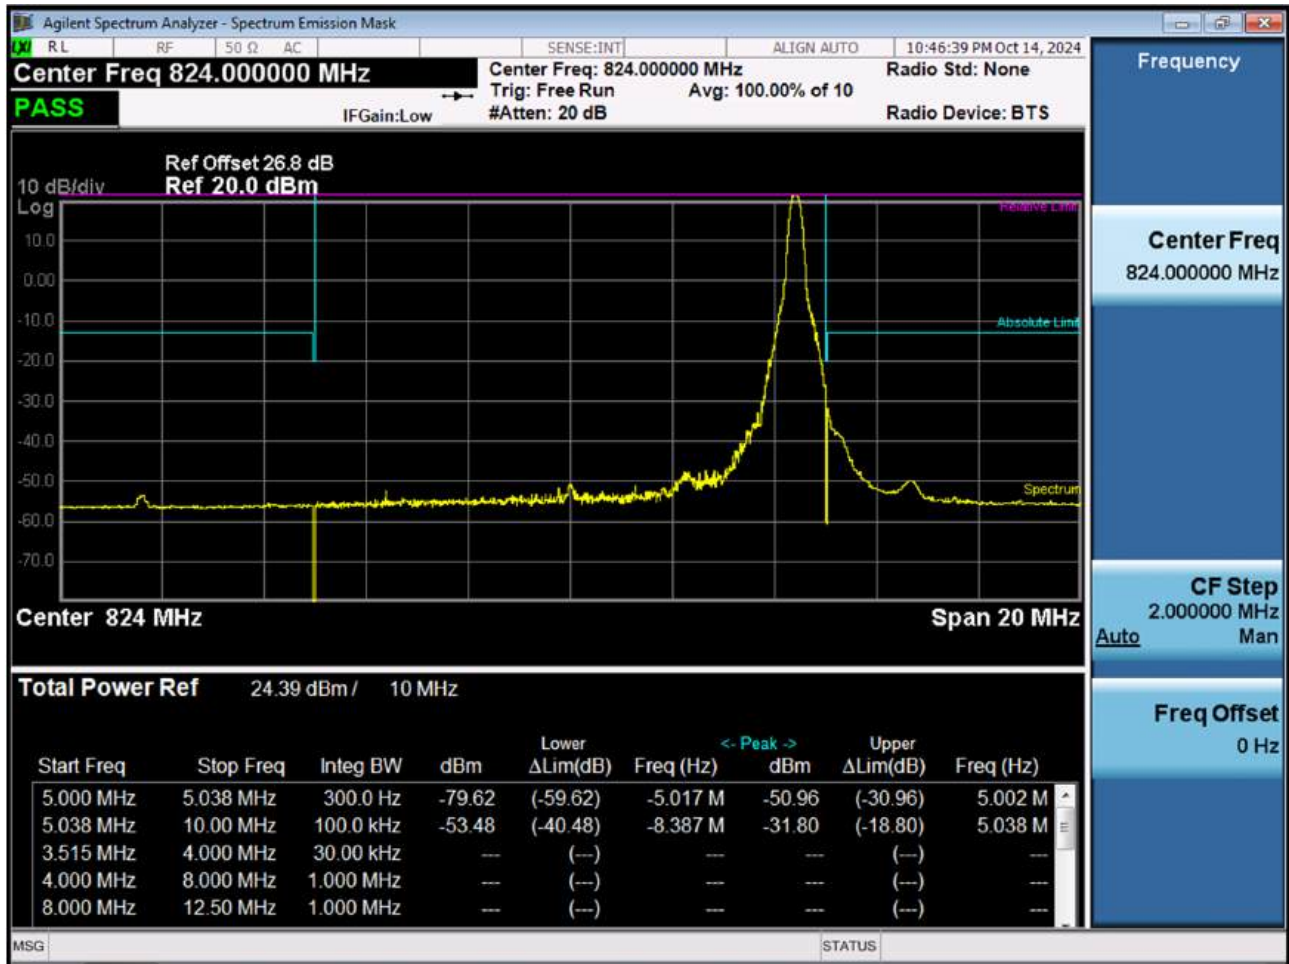


BAND 26. Channel Edge (10 MHz_QPSK_Full RB)



BAND 26. Band Edge (1.4 MHz_QPSK_RB 1_5)




BAND 26. Band Edge (1.4 MHz_QPSK_FullRB)

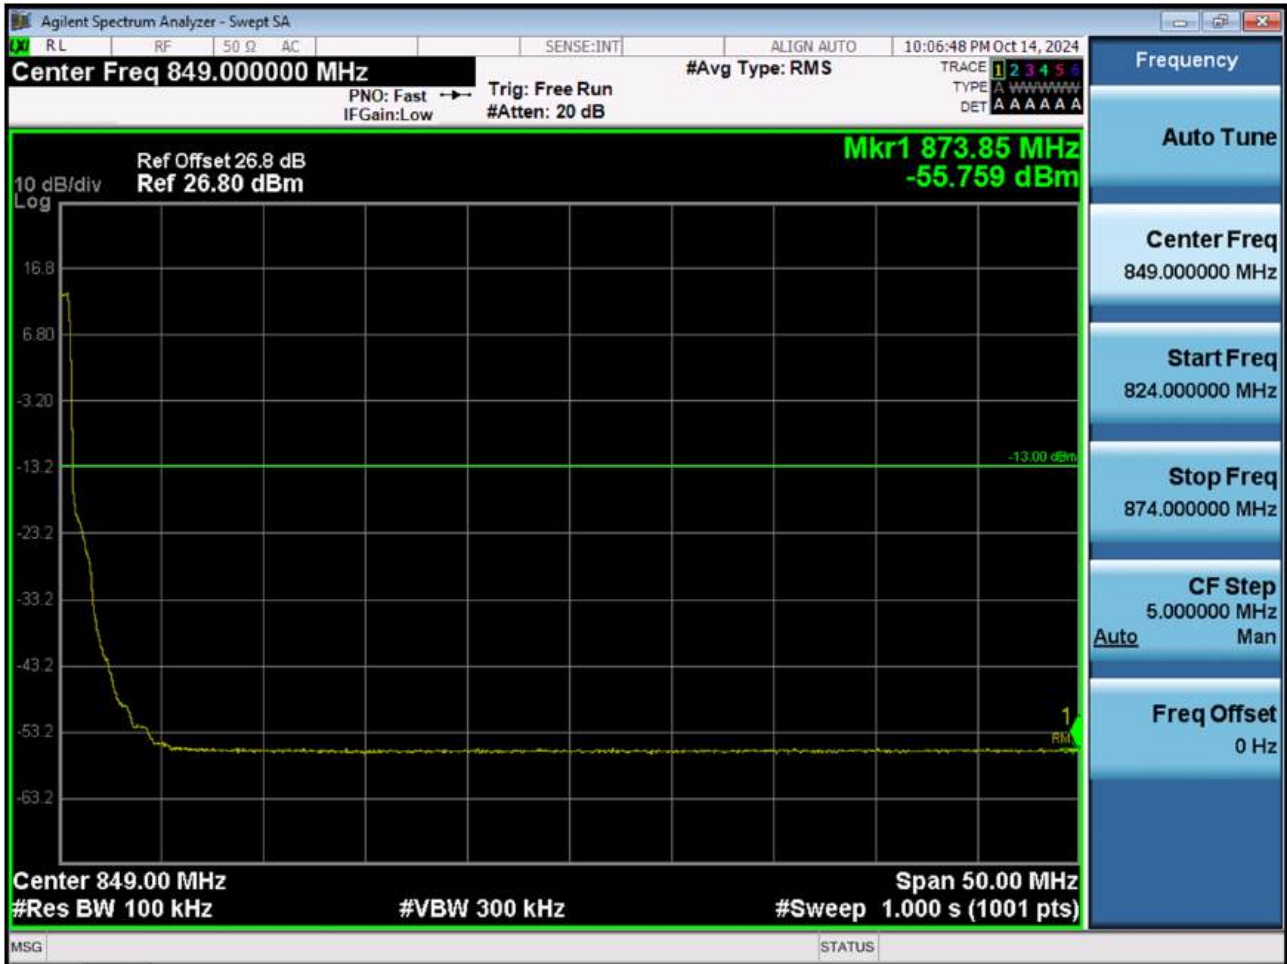


BAND 26. Band Edge (3 MHz_QPSK_RB 1_14)



BAND 26. Band Edge (3 MHz_QPSK_ Full RB)

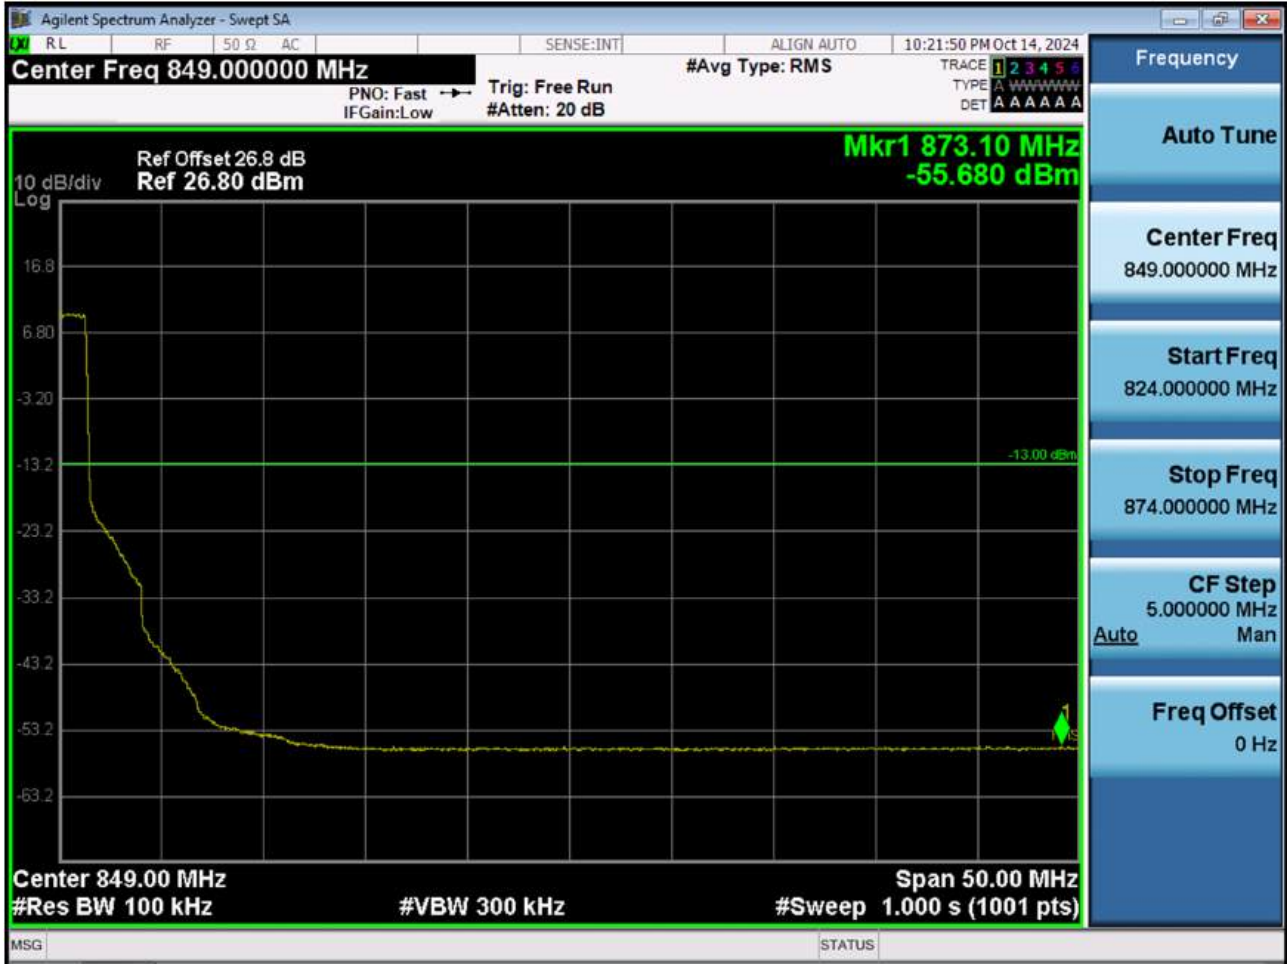

BAND 26. Band Edge (5 MHz_QPSK_RB 1_24)

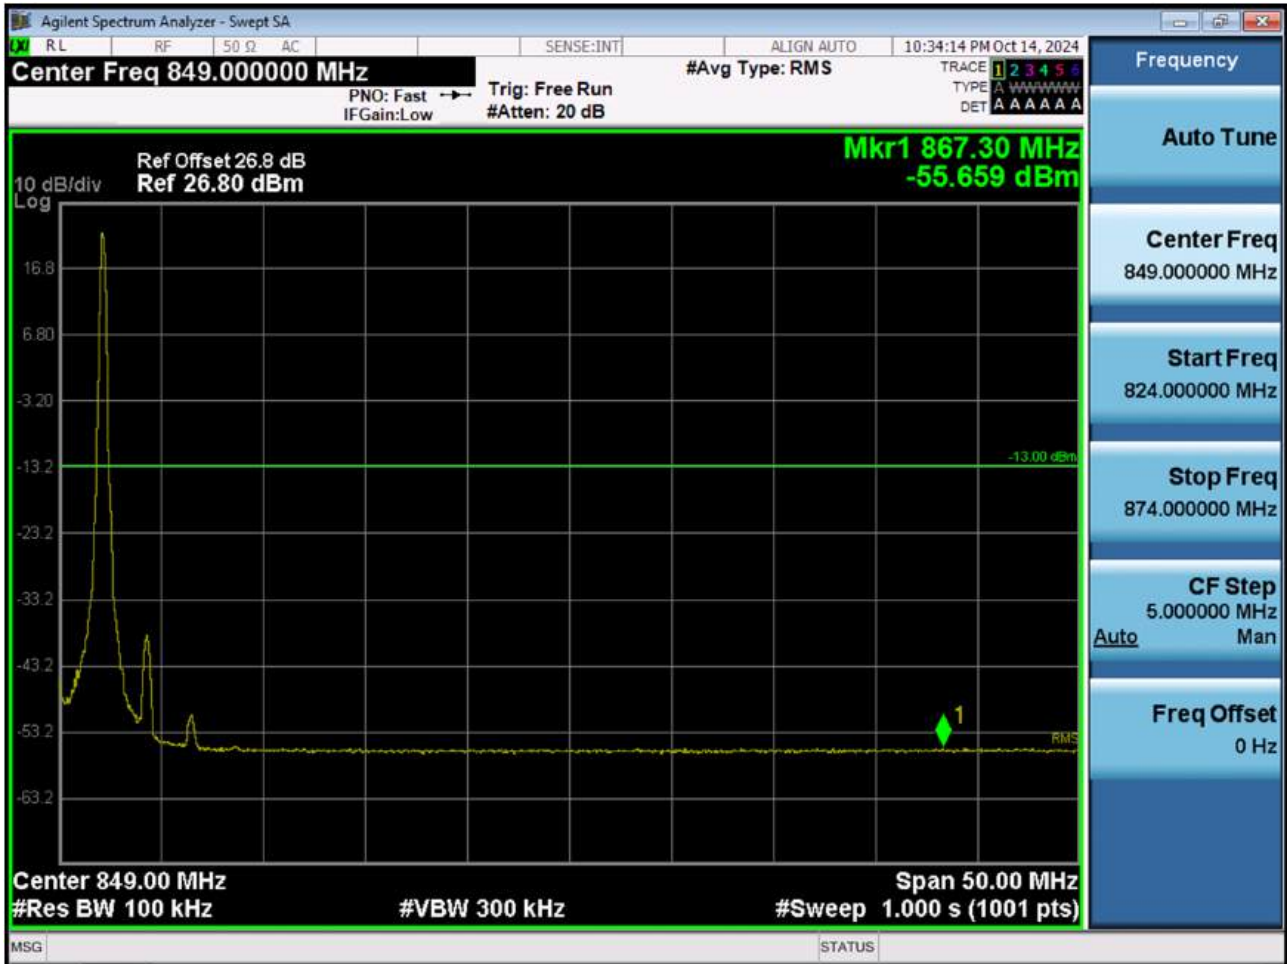

BAND 26. Band Edge (5 MHz_QPSK_ Full RB)



BAND 26. Band Edge (10 MHz_QPSK_RB 1_49)




BAND 26. Band Edge (10 MHz_QPSK_ Full RB)




12. TEST PLOTS(Sub 1 ANT)


BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26783 QPSK RB 6_0)

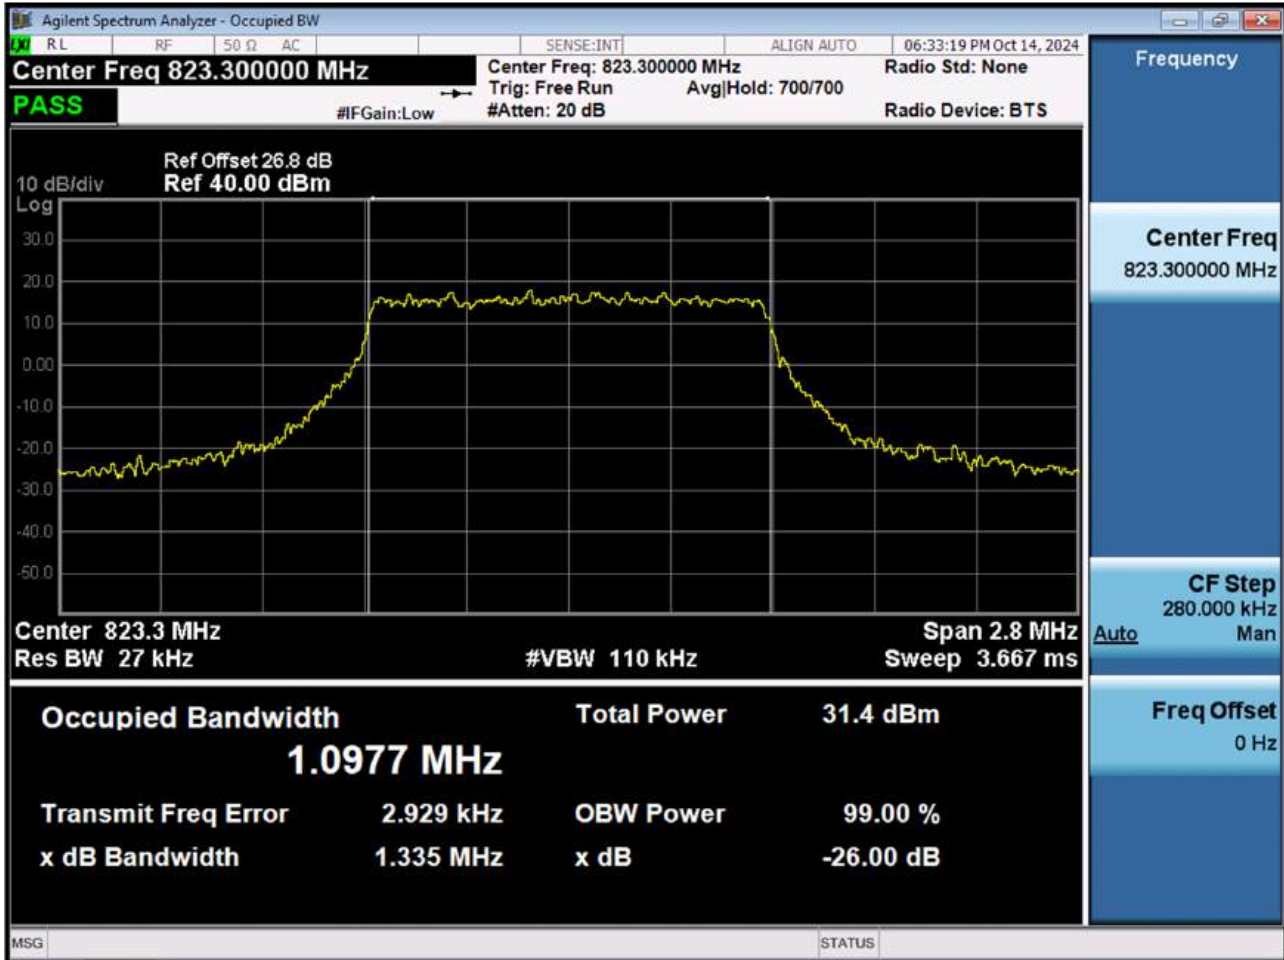


BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26783 16QAM RB 6_0)

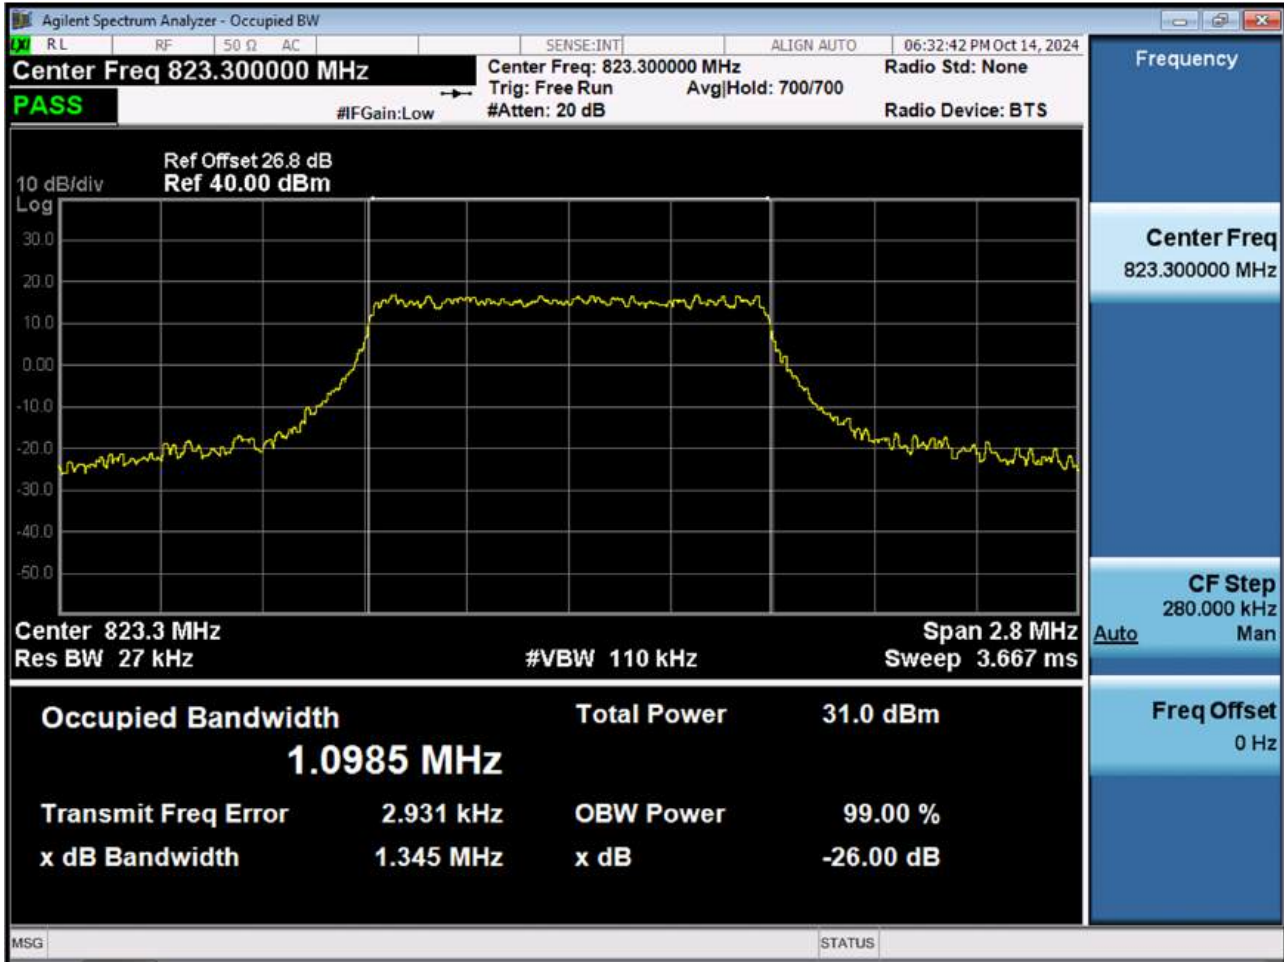


BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26783 64QAM RB 6_0)

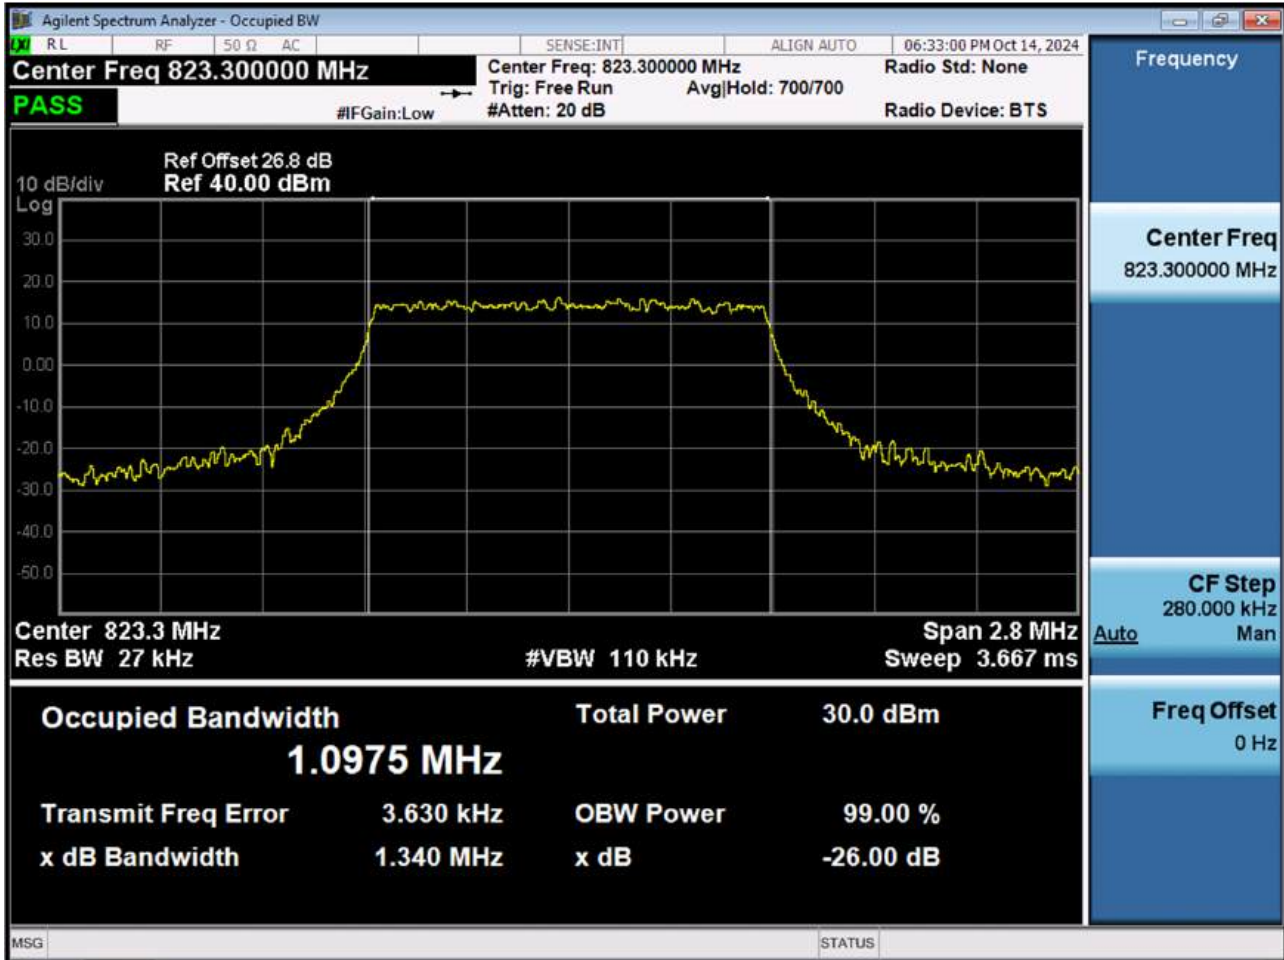


BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26775 QPSK RB 15_0)

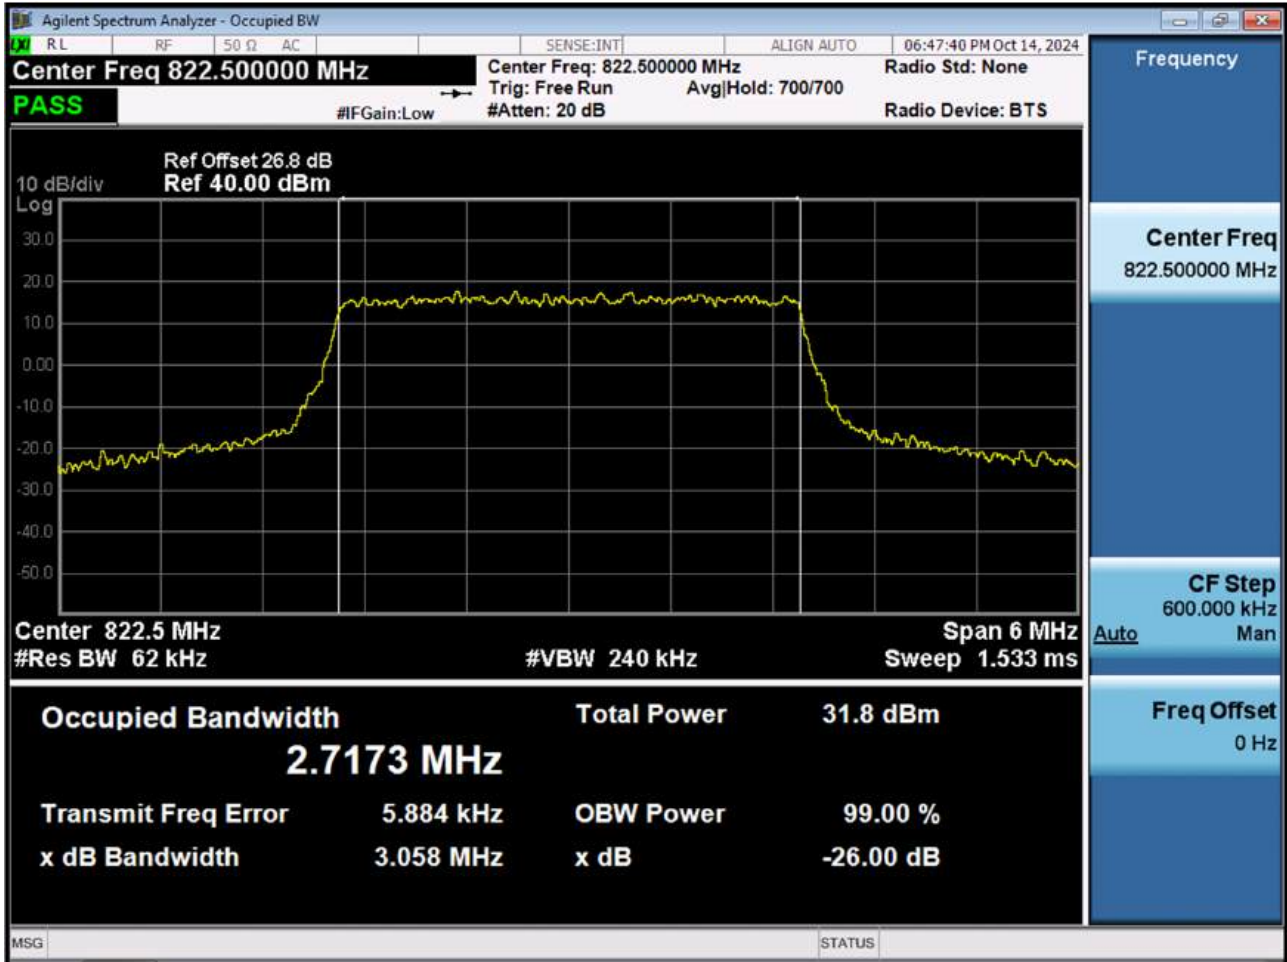


BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26775 16QAM RB 15_0)

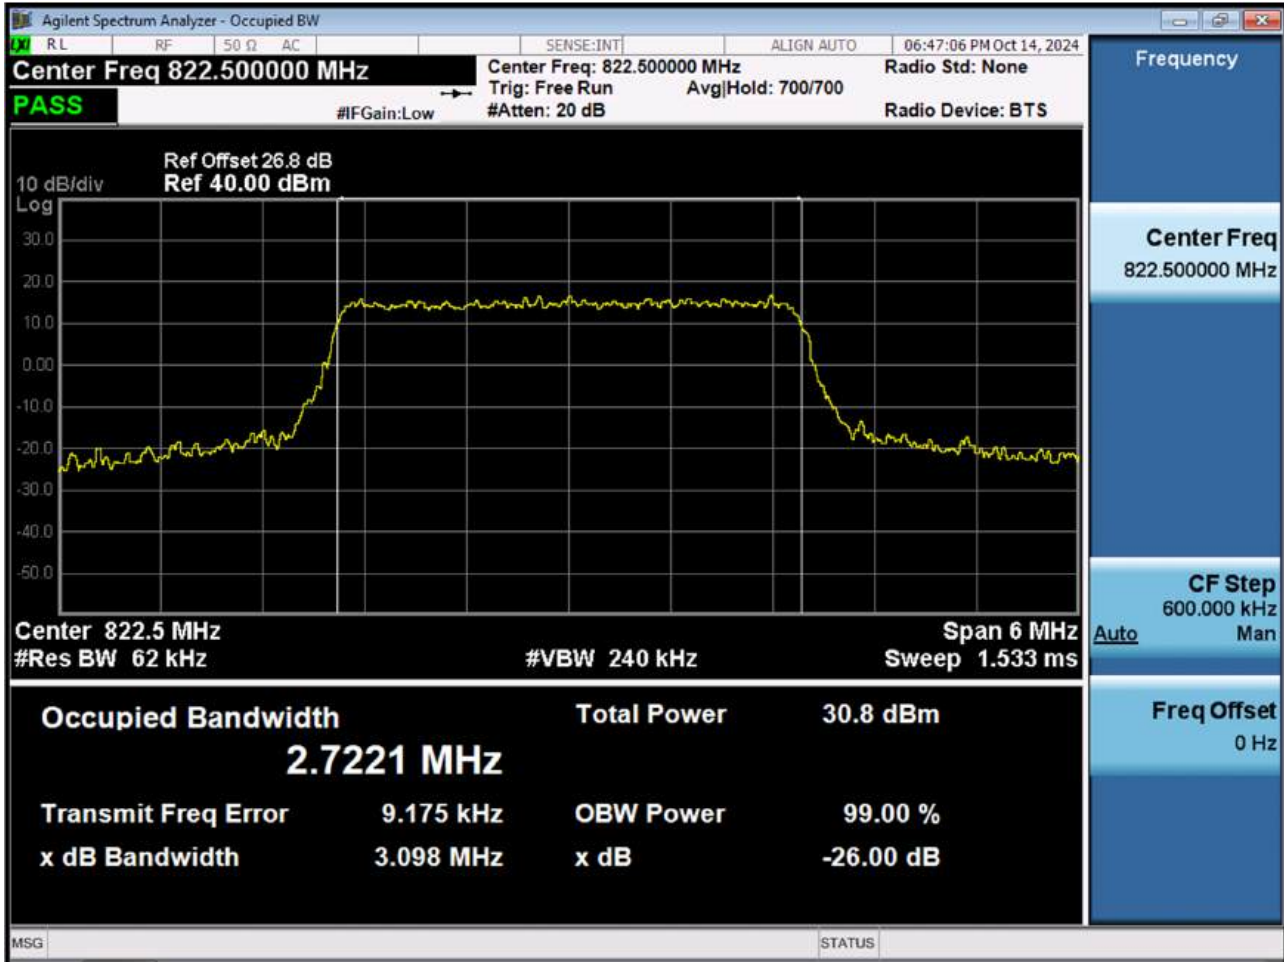


BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26775 64QAM RB 15_0)

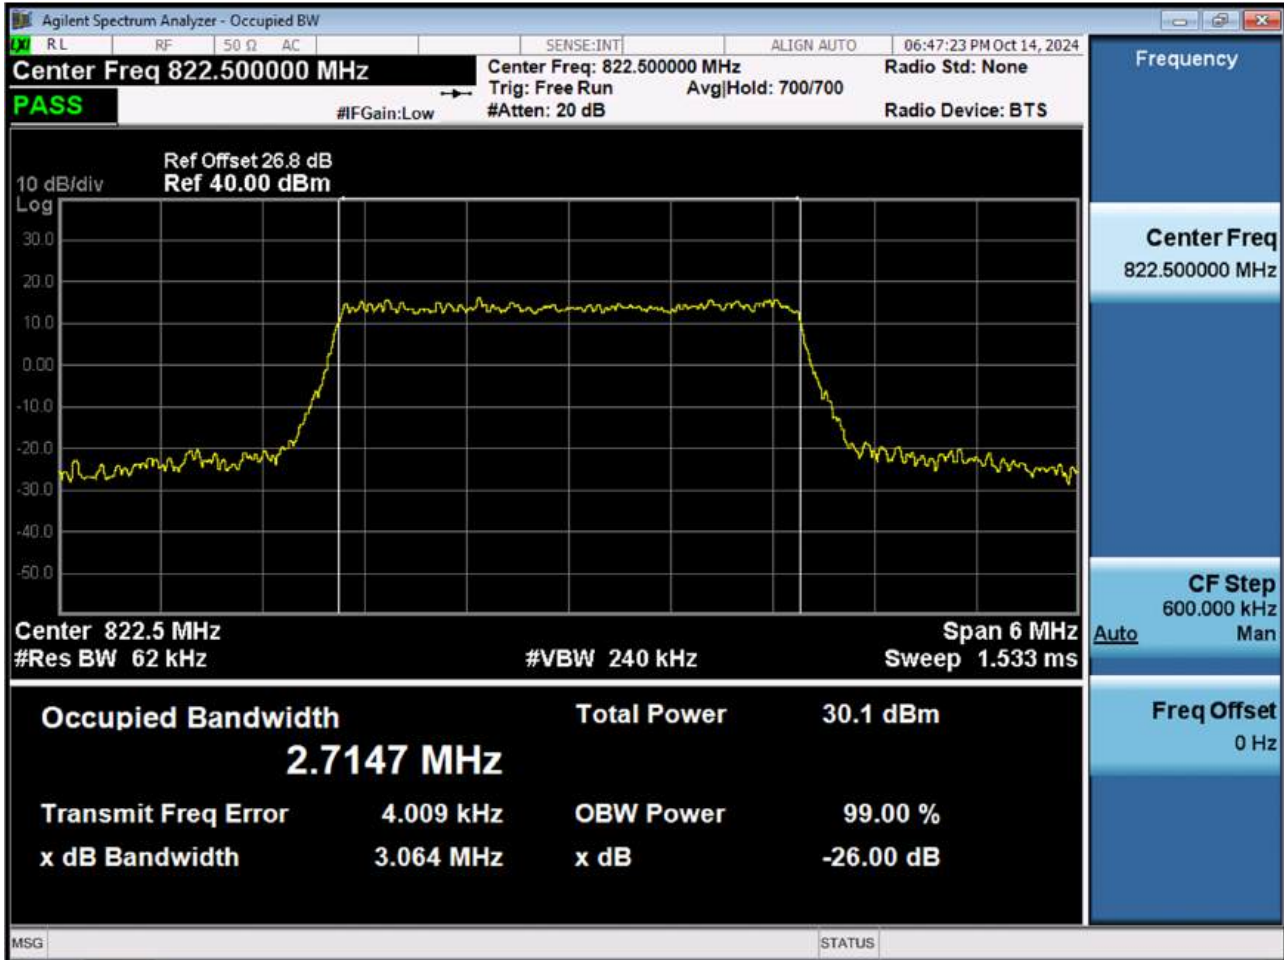


BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26765 QPSK RB 25_0)

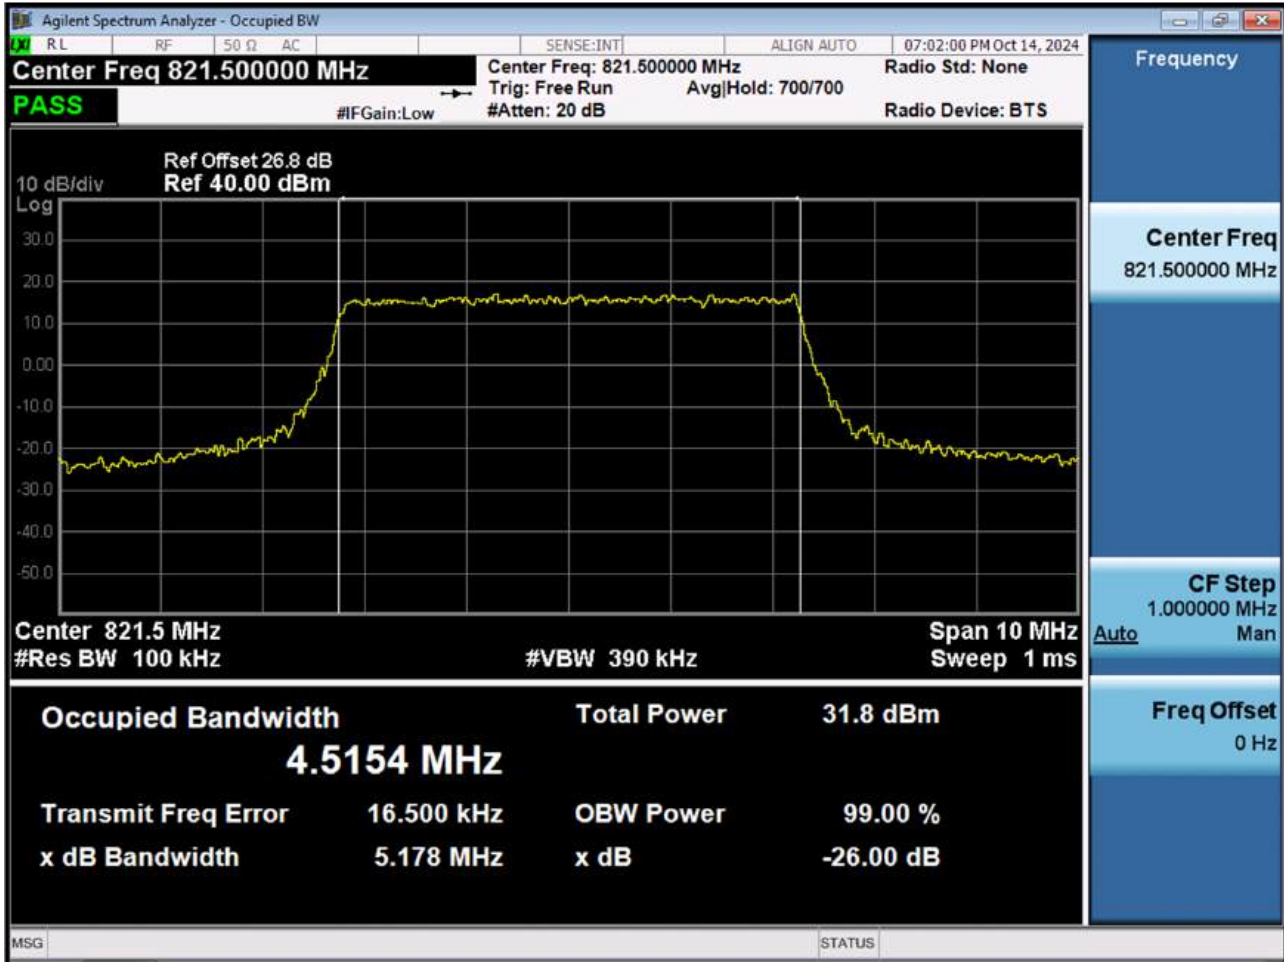


BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26765 16QAM RB 25_0)

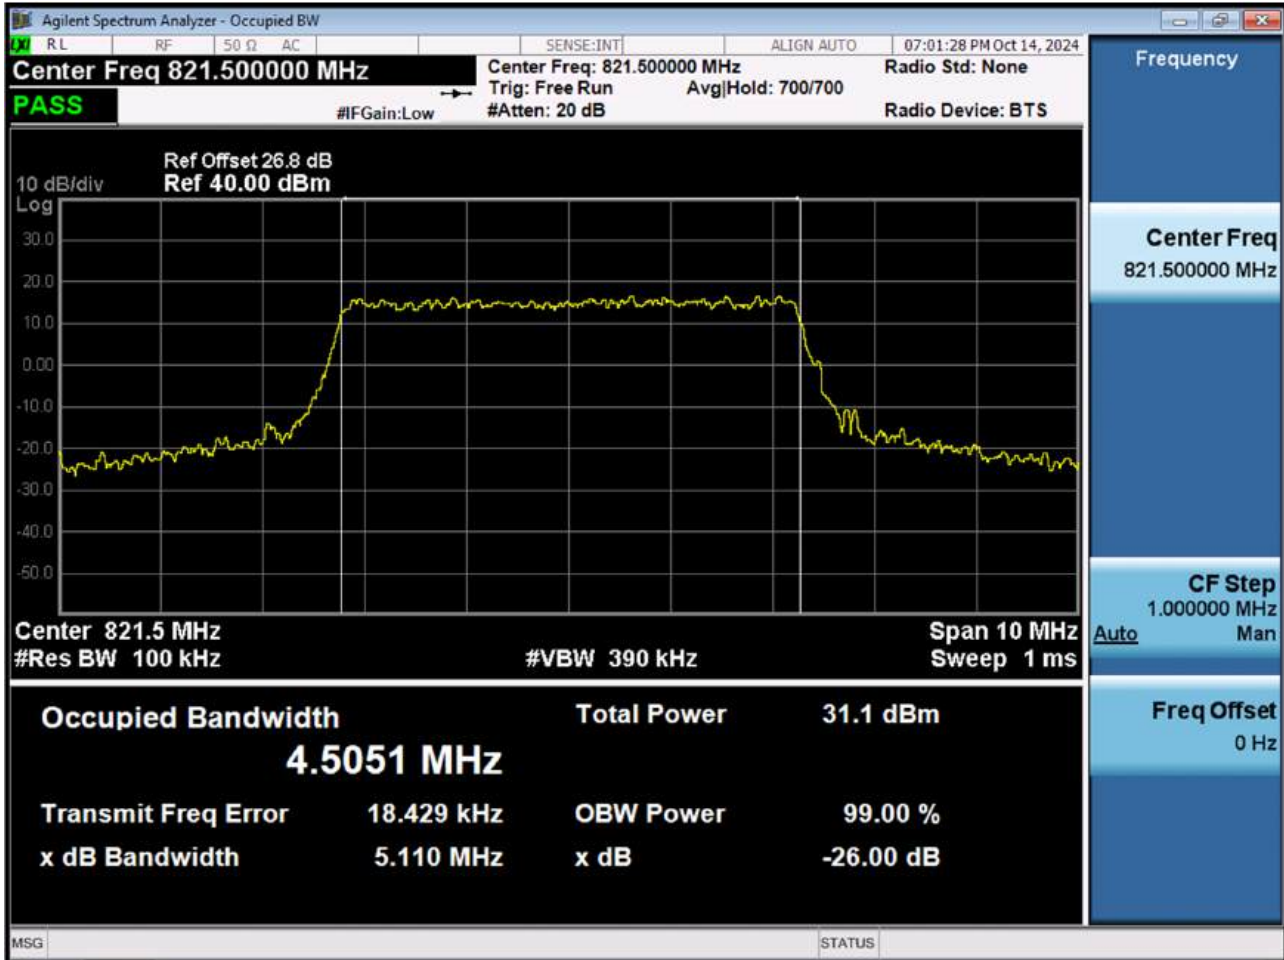


BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26765 64QAM RB 25_0)

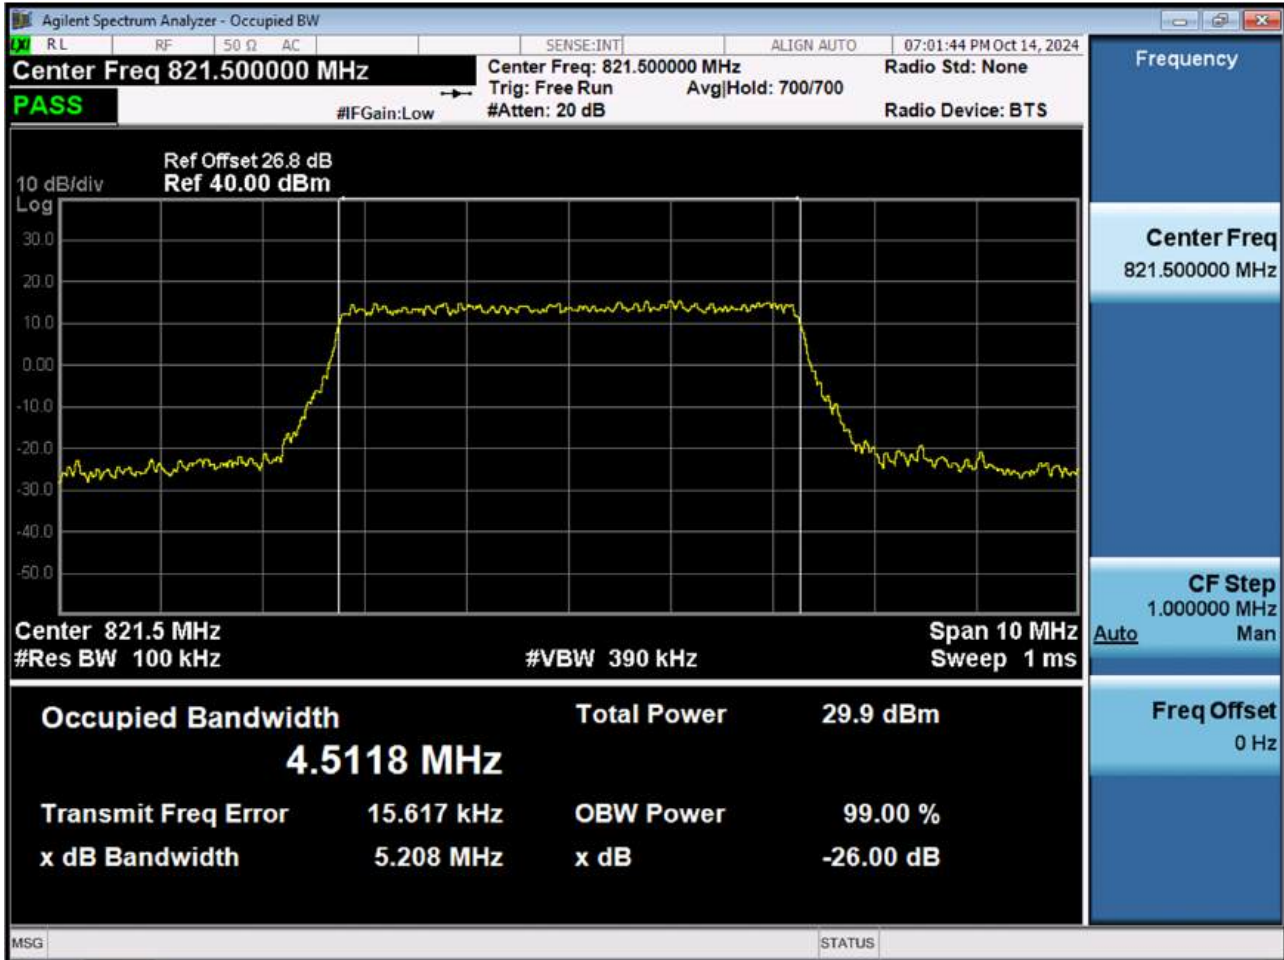


BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26740 QPSK RB 50_0)

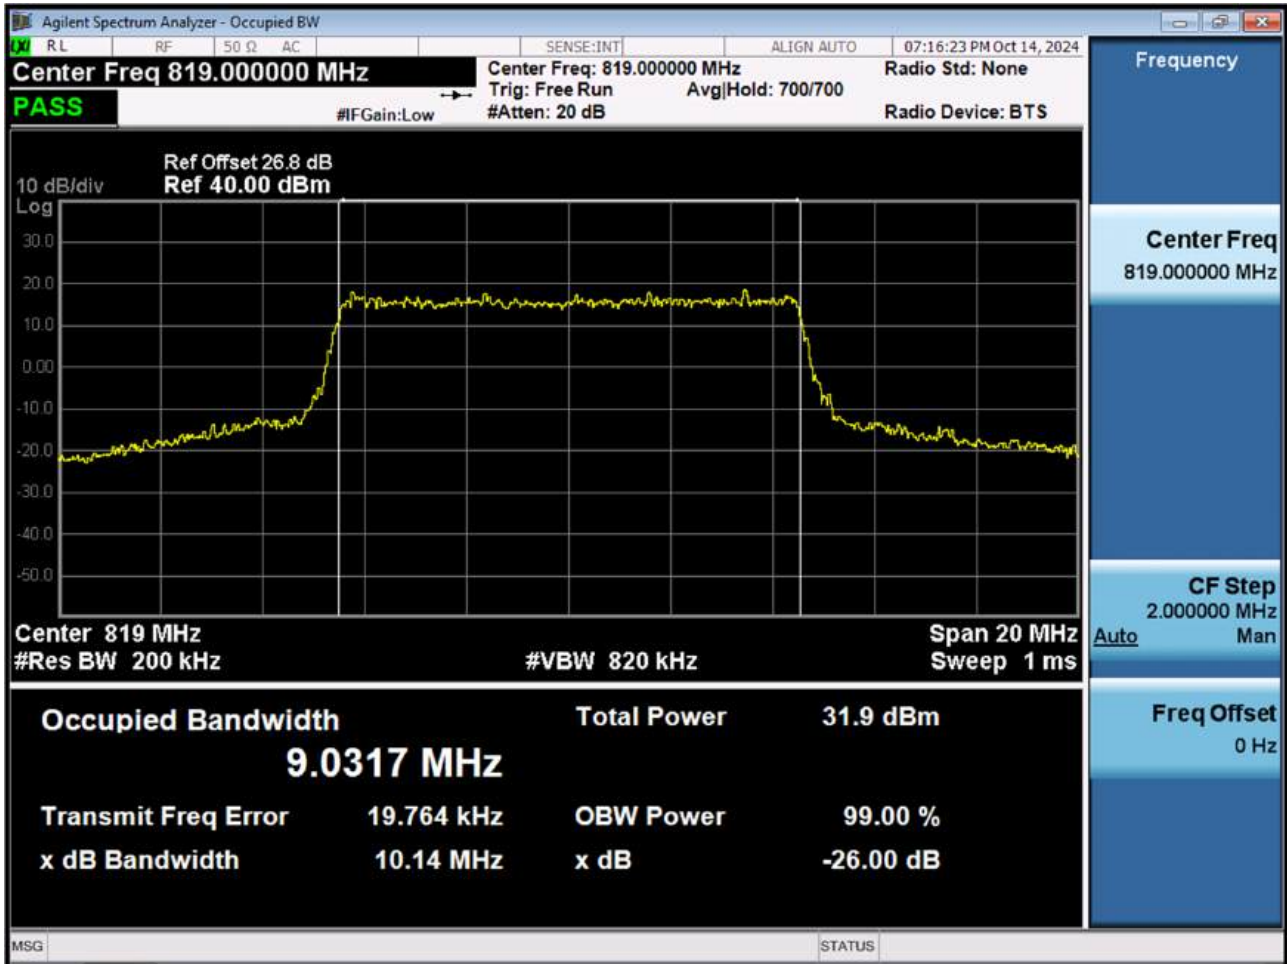


BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26740 16QAM RB 50_0)

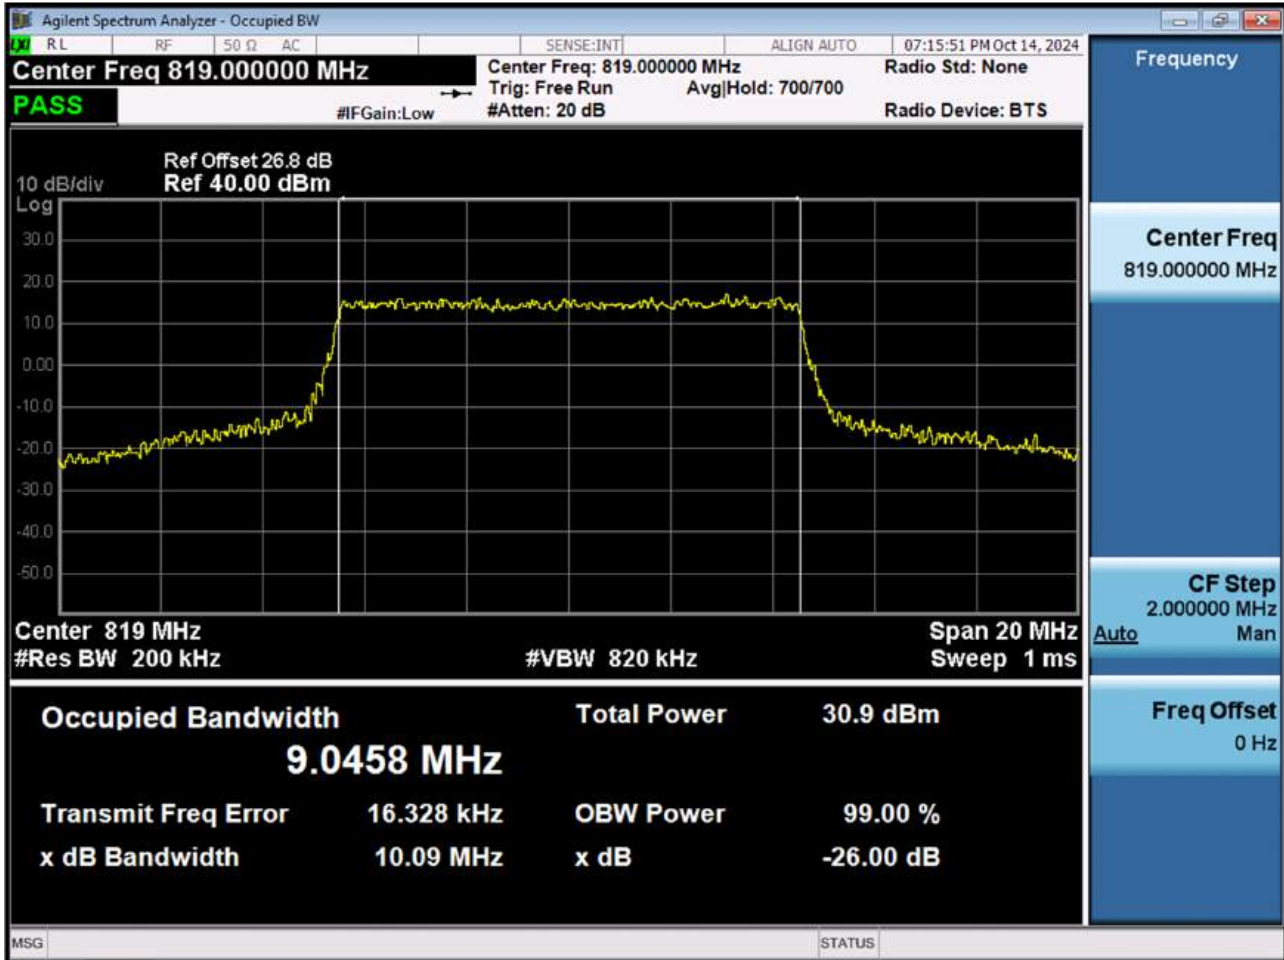


BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26740 64QAM RB 50_0)

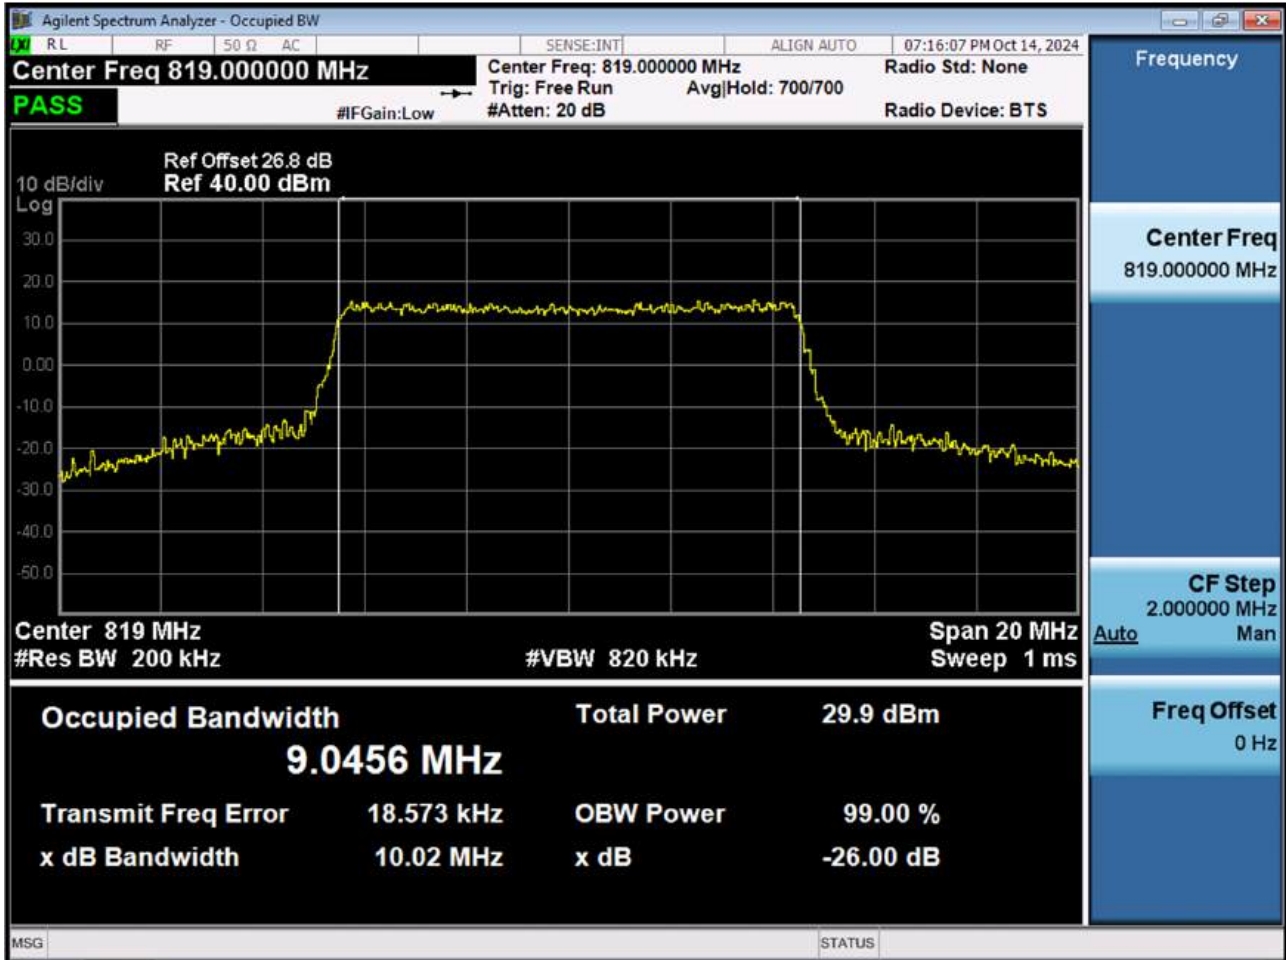


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26765 QPSK RB 75_0)

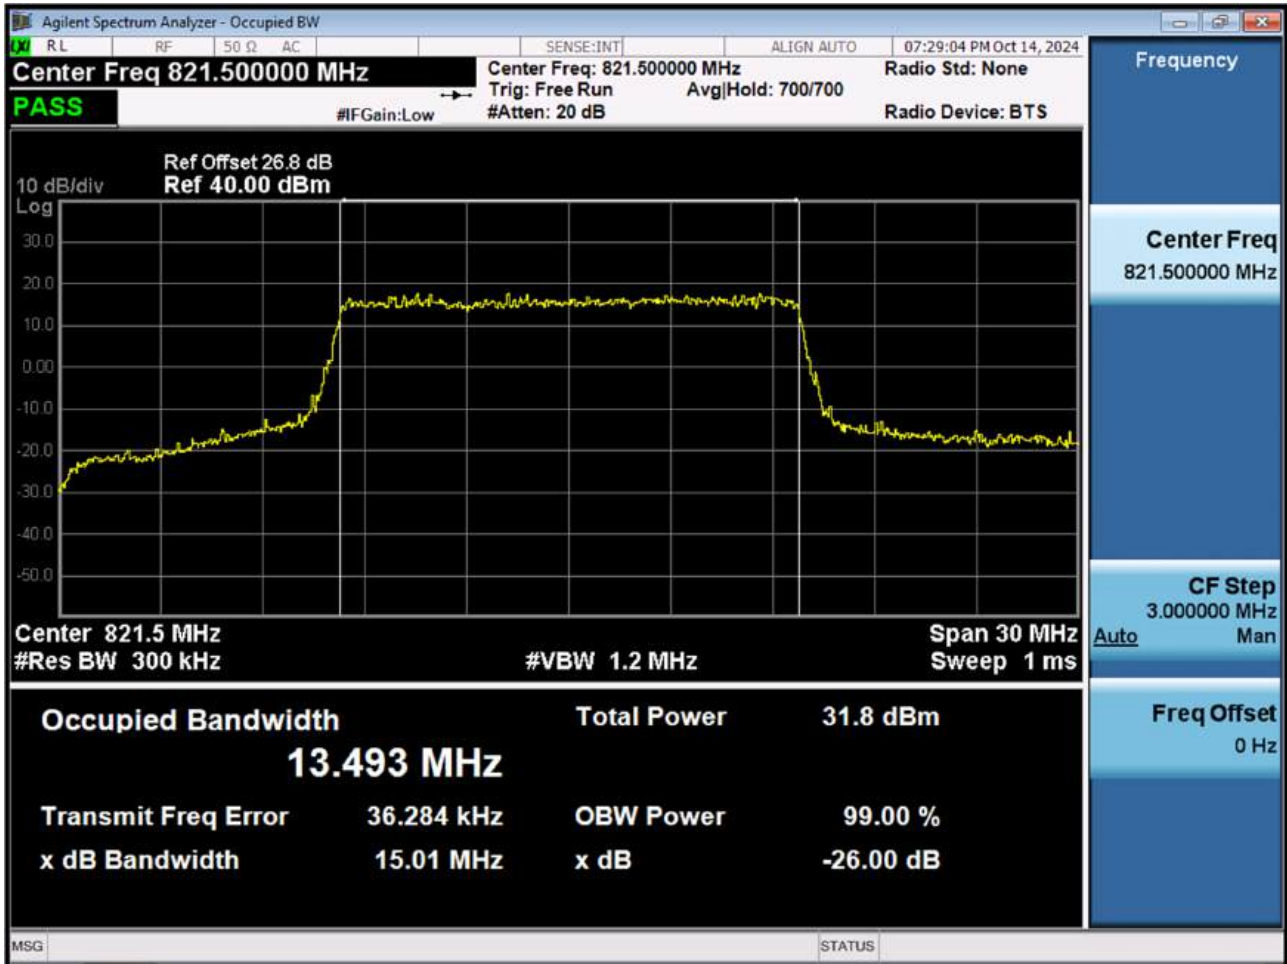


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26765 16QAM RB 75_0)

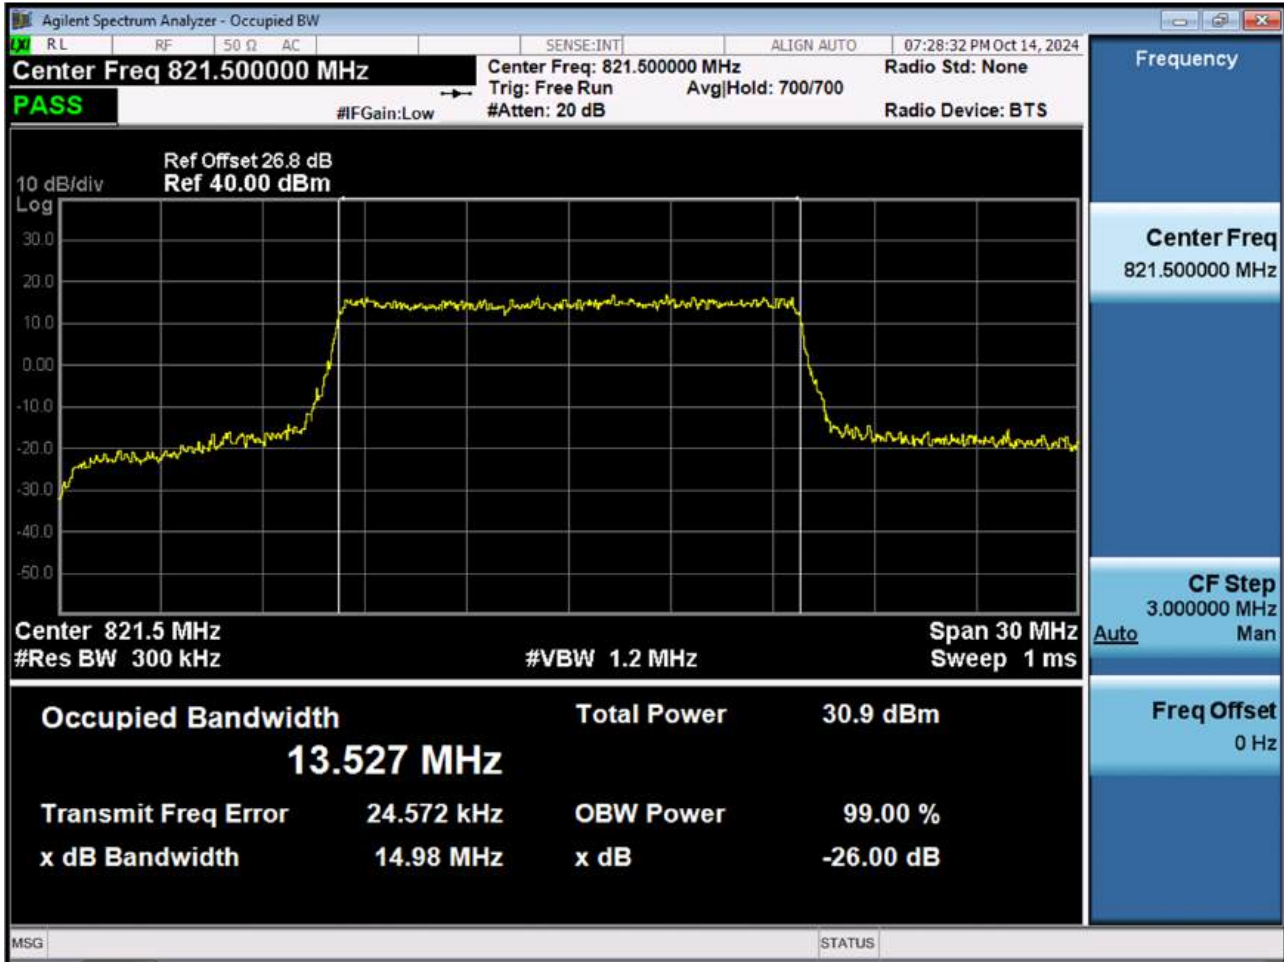


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26765 64QAM RB 75_0)

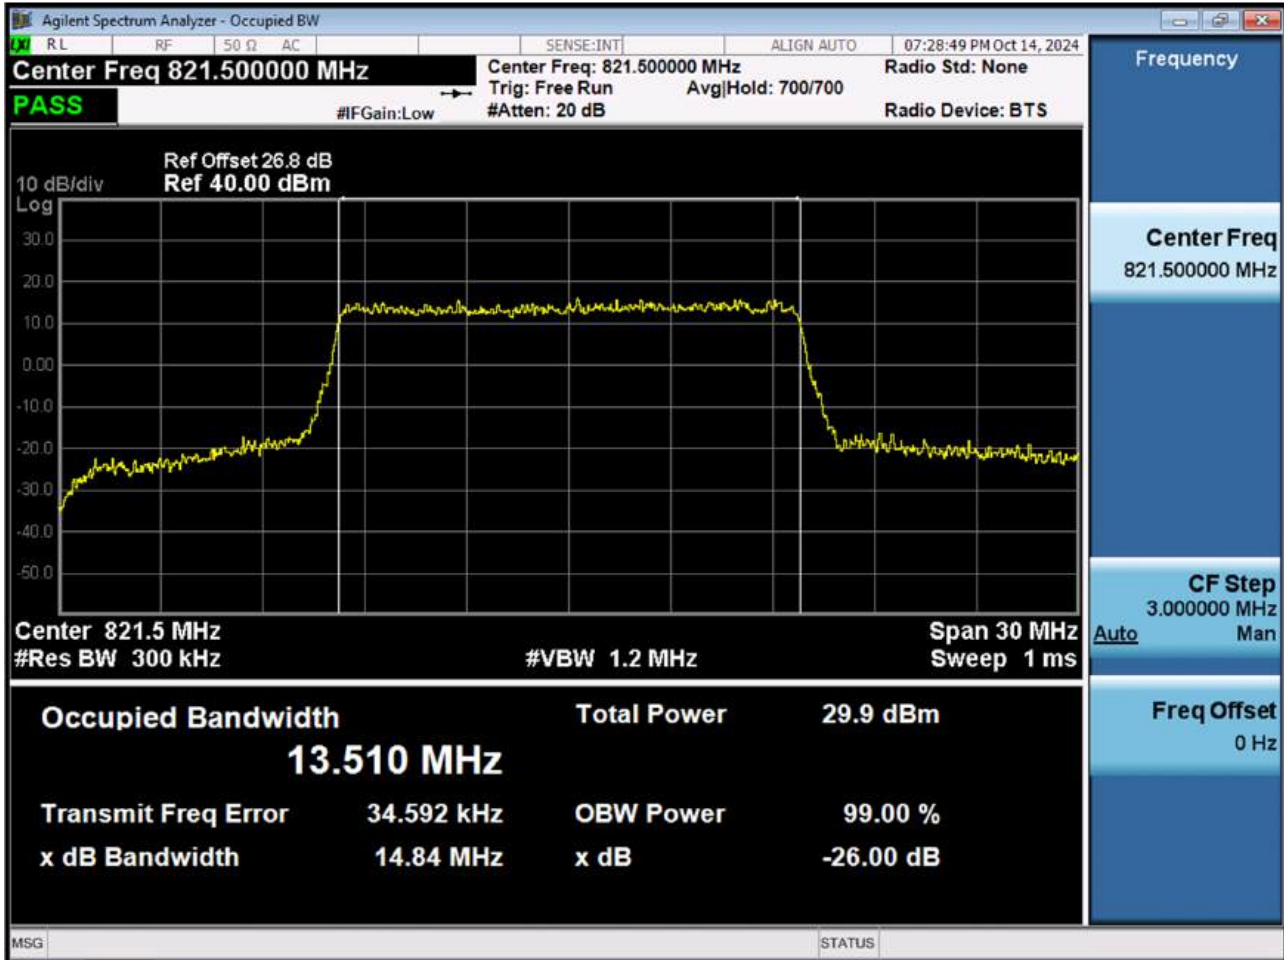

BAND 26. Lower Channel Edge Plot (1.4 M BW Ch.26697 QPSK RB 1, Offset 0)

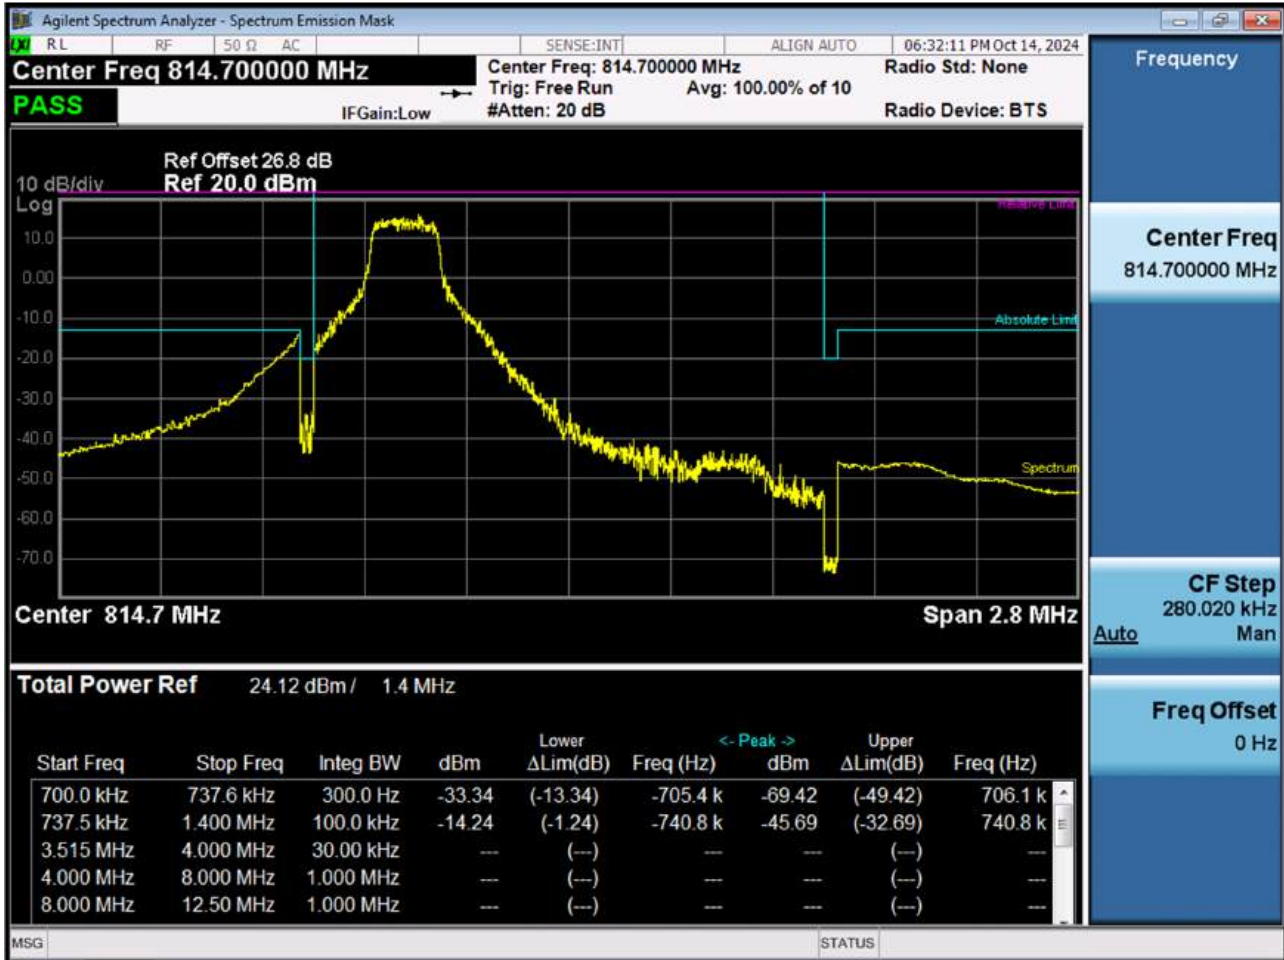

BAND 26. Lower Channel Edge Plot (1.4 M BW Ch.26697 QPSK_RB6_Offset 0)

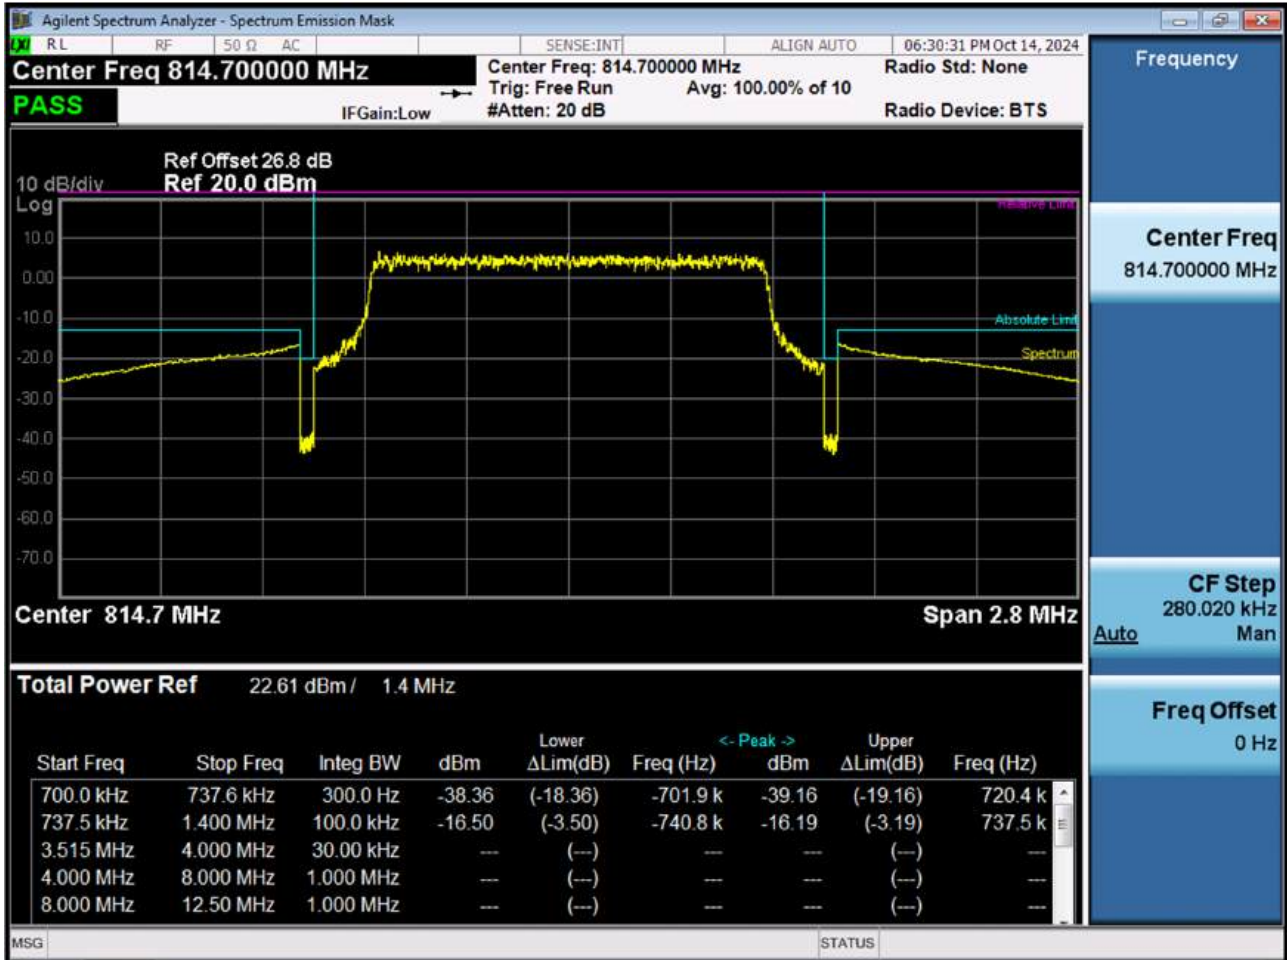

BAND 26. Lower Channel Edge Plot (3 M BW Ch.26705 QPSK RB 1, Offset 0)

