

TEST REPORT

FCC UNII Test for SC-51F
Certification

APPLICANT
SAMSUNG Electronics Co., Ltd.

REPORT NO.
HCT-RF-2412-FC019

DATE OF ISSUE
December 3, 2024

Tested by
Jin Gwan Lee



Technical Manager
Jong Seok Lee



HCT CO., LTD.
Bongjai Huh
BongJai Huh / CEO

**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Tel. +82 31 645 6300 Fax. +82 31 645 6401

TEST REPORT

REPORT NO.

HCT-RF-2412-FC019

DATE OF ISSUE

December 03, 2024

Additional Model

SCG31

Applicant

SAMSUNG Electronics Co., Ltd.

129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Product Name

Mobile Phone

Model Name

SC-51F

FCC ID

A3LSMS931JPN

Date of Test

August 26, 2024 ~ October 22, 2024

FCC Classification

Unlicensed National Information Infrastructure(NII)

Test Standard Used

FCC Rule Part(s): Part 15.407

Test Results

PASS

Location of Test

☒ Permanent Testing Lab ☐ On Site Testing Lab

(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	December 03, 2024	Initial Release

Notice

Content

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

The laboratory is not accredited for the test results marked *.

Information provided by the applicant is marked **.

Test results provided by external providers are marked ***.

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

Data referencing : UNII Report (FCC ID: A3LSMS931U)

CONTENTS

1. GENERAL INFORMATION	5
EUT DESCRIPTION	5
ANTENNA CONFIGURATIONS	6
2. MAXIMUM OUTPUT POWER	8
3. TEST METHODOLOGY	10
EUT CONFIGURATION	10
EUT EXERCISE	10
GENERAL TEST PROCEDURES	10
DESCRIPTION OF TEST MODES	11
4. INSTRUMENT CALIBRATION	11
5. FACILITIES AND ACCREDITATIONS	11
5.1 FACILITIES	11
5.2 EQUIPMENT	11
6. AntENNA REQUIREMENTS	12
7. MEASUREMENT UNCERTAINTY	12
8. DESCRIPTION OF TESTS	13
9. SUMMARY OF TEST RESULTS	32
10. TEST RESULT	33
10.1 DUTY CYCLE	33
10.2 26 dB Bandwidth	38
10.3 6 dB BANDWIDTH	48
10.4 OUTPUT POWER MEASUREMENT	54
10.5 POWER SPECTRAL DENSITY	59
10.6 FREQUENCY STABILITY	71
10.6.1 802.11ac 160 MHz BW	71
10.7 STRADDLE CHANNEL	83
10.7.1 26 dB Bandwidth	83
10.7.2 6 dB Bandwidth	87
10.7.3 Output Power	90
10.7.4 Power Spectral Density	96
10.8 RADIATED SPURIOUS EMISSIONS	102
10.9 RADIATED RESTRICTED BAND EDGE	111
10.10 POWERLINE CONDUCTED EMISSIONS	139
11. LIST OF TEST EQUIPMENT	140
12. ANNEX A_ TEST SETUP PHOTO	142

1. GENERAL INFORMATION

EUT DESCRIPTION

Model	SC-51F	
Additional Model	SCG31	
EUT Type	Mobile Phone	
Power Supply	DC 3.88 V	
Modulation Type	OFDM : 802.11a, 802.11n, 802.11ac	
Frequency Range (MHz)	U-NII-1	20 MHz BW : 5180 - 5240 40 MHz BW : 5190 - 5230 80 MHz BW : 5210 160 MHz BW : 5250
	U-NII-2A	20 MHz BW : 5260 - 5320 40 MHz BW : 5270 - 5310 80 MHz BW : 5290 160 MHz BW : 5250
	U-NII-2C	20 MHz BW : 5500 - 5720 40 MHz BW : 5510 - 5710 80 MHz BW : 5530 - 5690 160 MHz BW : 5570
	U-NII-3	20 MHz BW : 5745 - 5825 40 MHz BW : 5755 - 5795 80 MHz BW : 5775 160 MHz BW : 5815
	U-NII-4	20 MHz BW : 5845 - 5885 40 MHz BW : 5835 - 5875 80 MHz BW : 5855 160 MHz BW : 5815
Straddle channel	Supported	
TDWR Band	Supported	
Dynamic Frequency Selection	Slave without radar detection	
Antenna Specification	Type: Metal	
Serial number	Conducted : R3CX70H9HTJ Radiated : R3CX80BGC4E	

ANTENNA CONFIGURATIONS

1. Antenna configuration

Configurations	SISO		MIMO	
	Ant.1	Ant.2	CDD	SDM
802.11a	O	O	O	X
802.11n	O	O	O	O
802.11ac	O	O	O	O

Note:

- (1) O = Support, X = Not Support
- (2) SISO = Single Input Single Output
- (3) SDM = Spatial Diversity Multiplexing
- (4) CDD = Cyclic Delay Diversity

2.This device supports simultaneous transmission operation, which allows for two channels to operate independent of one another in the 2.4 GHz and 5 GHz or 6GHz Bands simultaneously on each antenna.

RSDB Scenario	2.4 GHz WiFi Ant.1	2.4 GHz WiFi Ant.2	5 GHz WiFi Ant.1	5 GHz WiFi Ant.2	6 GHz WiFi Ant.1	6 GHz WiFi Ant.2	BT Ant.1	BT Ant.2	Test Case
Dual Bluetooth + 5 GHz WiFi MIMO			on	on			on	on	Scenario1
Dual Bluetooth + 6 GHz WiFi MIMO					on	on	on	on	
2.4 GHz WiFi MIMO + 5 GHz WiFi MIMO	on	on	on	on					Scenario2
2.4 GHz WiFi MIMO + 6 GHz WiFi MIMO	on	on			on	on			
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO		on	on	on			on		Scenario3
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 6 GHz WiFi MIMO		on			on	on	on		

3. Directional Gain Calculation

According to KDB 662911 D01 Multiple Transmitter Output v02r01 F) 2) e) (iii), f) ii)

$$\text{Directional Gain(CDD)} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left(\sum_{k=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right]$$

$$\text{Directional gain(SDM)} = G_{\max} + 10 \cdot \text{LOG}(N_{ANT} / N_{SS})$$

Band	Ant Gain (dBi)		N _{ANT} / N _{SS}	Directional Gain (dBi)	
	ANT1	ANT2		CDD	SDM
UNII 1	-4.49	-6.94	2 / 2	-2.62	-4.49
UNII 2A	-4.45	-6.42		-2.37	-4.45
UNII 2C	-4.37	-4.82		-1.58	-4.37
UNII 3	-4.14	-5.70		-1.87	-4.14
UNII 4	-4.14	-5.70		-1.87	-4.14

Note

According to Ansi C63.10-2013 section 14.4.3, the directional gain is calculated using the formula, where GN is the gain of the nth antenna and NANT is the total number of antennas used.

$$\text{Directional gain(CDD)} = 10 \cdot \log \left(\left(10^{(\text{ANT1 Gain}/20)} + 10^{(\text{ANT2 Gain}/20)} \right)^2 / 2 \right) \text{ dBi}$$

$$\text{Directional gain(SDM)} = G_{\max} + 10 \cdot \text{LOG}(N_{ANT} / N_{SS})$$

Sample Calculation (Conducted Power, MIMO):

Ex) Ant 1 : 11.58 dBm Ant 2 : 12.08 dBm

$$\text{Ant1} + \text{Ant 2} = \text{MIMO}$$

$$(11.58 \text{ dBm} + 12.08 \text{ dBm}) = (14.387 \text{ mW} + 16.143 \text{ mW}) = 30.53 \text{ mW} = 14.88 \text{ dBm}$$

Sample Calculation (E.I.R.P & E.I.R.P Spectral Density, MIMO):

Ex) ANT1 : 15.35 dBm , ANT2 : 15.12 dBm, Directional Gain : 3 dBi

$$\text{Conducted Power} = (15.35 \text{ dBm} + 15.12 \text{ dBm}) = (34.276 \text{ mW} + 32.508 \text{ mW}) = 66.784 \text{ mW} = 18.25 \text{ dBm}$$

$$\text{E.I.R.P} = 18.25 \text{ dBm} + 3 \text{ dBi} = 21.25 \text{ dBm}$$

2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

Band	Mode	MIMO_CDD(Ant.1+ Ant.2)					
		Ant.1 Power		Ant.2 Power		Ant.1 + Ant.2 Power	
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)
UNII1	802.11a	16.87	0.049	16.52	0.045	19.71	0.093
	802.11n (HT20)	16.94	0.049	16.43	0.044	19.71	0.093
	802.11n (HT40)	17.10	0.051	16.56	0.045	19.84	0.096
	802.11ac (VHT20)	17.05	0.051	16.55	0.045	19.82	0.096
	802.11ac (VHT40)	17.12	0.052	16.46	0.044	19.82	0.096
	802.11ac (VHT80)	11.55	0.014	11.20	0.013	14.39	0.027
UNII2A	802.11a	17.06	0.051	16.52	0.045	19.81	0.096
	802.11n (HT20)	17.20	0.053	16.43	0.044	19.85	0.097
	802.11n (HT40)	17.01	0.050	16.29	0.043	19.67	0.093
	802.11ac (VHT20)	16.62	0.046	16.06	0.040	19.36	0.086
	802.11ac (VHT40)	17.09	0.051	16.29	0.043	19.72	0.094
	802.11ac (VHT80)	11.90	0.015	11.40	0.014	14.67	0.029
UNII2C	802.11a	16.35	0.043	17.14	0.052	19.77	0.095
	802.11n (HT20)	16.42	0.044	17.03	0.051	19.75	0.094
	802.11n (HT40)	16.74	0.047	17.20	0.052	19.98	0.100
	802.11ac (VHT20)	16.53	0.045	17.08	0.051	19.83	0.096
	802.11ac (VHT40)	16.78	0.048	17.19	0.052	20.00	0.100
	802.11ac (VHT80)	16.63	0.046	17.04	0.051	19.85	0.097
UNII3	802.11a	16.76	0.047	16.67	0.046	19.72	0.094
	802.11n (HT20)	16.87	0.049	16.63	0.046	19.77	0.095
	802.11n (HT40)	16.78	0.048	16.68	0.047	19.74	0.094
	802.11ac (VHT20)	16.89	0.049	16.66	0.046	19.79	0.095
	802.11ac (VHT40)	16.80	0.048	16.57	0.045	19.70	0.093
	802.11ac (VHT80)	16.33	0.043	16.26	0.042	19.30	0.085
UNII4 (Conducted For inf.)	802.11a	16.83	0.048	16.63	0.046	19.74	0.094
	802.11n (HT20)	16.94	0.049	16.59	0.046	19.78	0.095
	802.11n (HT40)	16.96	0.050	16.78	0.048	19.88	0.097
	802.11ac (VHT20)	16.95	0.050	16.57	0.045	19.78	0.095
	802.11ac (VHT40)	16.88	0.049	16.74	0.047	19.82	0.096
	802.11ac (VHT80)	16.16	0.041	16.01	0.040	19.10	0.081
UNII1-2A	802.11ac (VHT160)	12.36	0.017	12.12	0.016	15.25	0.033
UNII2C	802.11ac (VHT160)	11.19	0.013	11.56	0.014	14.39	0.027
UNII3&4	802.11ac (VHT160)	13.24	0.021	13.14	0.021	16.20	0.042

Band	Mode	MIMO_CDD(Ant.1+ Ant.2) (EIRP)											
		Ant.1 Power				Ant.2 Power				(Ant.1 + Ant.2) Power			
		(dBm)	ANT Gain(dBi)	EIRP (dBm)	(W)	(dBm)	ANT Gain(dBi)	EIRP (dBm)	(W)	(dBm)	ANT Gain(dBi)	EIRP (dBm)	(W)
UNII4 (E.I.R.P)	802.11a	16.83	-4.14	12.69	0.019	16.63	-5.70	10.93	0.012	19.74	-1.87	17.87	0.061
	802.11n (HT20)	16.94	-4.14	12.80	0.019	16.59	-5.70	10.89	0.012	19.78	-1.87	17.91	0.062
	802.11n (HT40)	16.96	-4.14	12.82	0.019	16.78	-5.70	11.08	0.013	19.88	-1.87	18.01	0.063
	802.11ac (VHT20)	16.95	-4.14	12.81	0.019	16.57	-5.70	10.87	0.012	19.78	-1.87	17.91	0.062
	802.11ac (VHT40)	16.88	-4.14	12.74	0.019	16.74	-5.70	11.04	0.013	19.82	-1.87	17.95	0.062
	802.11ac (VHT80)	16.16	-4.14	12.02	0.016	16.01	-5.70	10.31	0.011	19.10	-1.87	17.23	0.053
	802.11ac (VHT160)	13.24	-4.14	9.10	0.008	13.14	-5.70	7.44	0.006	16.20	-1.87	14.33	0.027

3. TEST METHODOLOGY

The measurement procedure described in FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 dated December 14, 2017 entitled “Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part15, Subpart E” and ANSI C63.10 (Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’ were used in the measurement. Additionally, for U-NII-4 band, use the following measurement procedure KDB 291074 D02 EMC Measurement v01

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average Measurement Type or modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated March 11, 2024 (Registration Number: KR0032).

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak Measurement Typeors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. AntENNA REQUIREMENTS

According to FCC 47 CFR § 15.203, § 15.407:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203, § 15.407

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.98 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.52 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.66 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$)

8. DESCRIPTION OF TESTS

8.1. Duty Cycle

Test Configuration

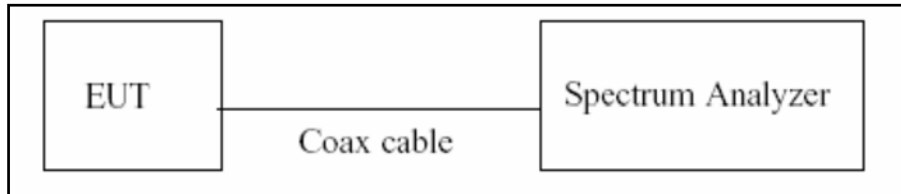

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure B.2 in KDB 789033 D02 v02r01.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ($\geq$ RBW)
3. SPAN = 0 Hz
4. Measurement Type or = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = $T_{\text{on}} / T_{\text{total}}$ and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

8.2. 6 dB Bandwidth & 26 dB Bandwidth

Limit

Within the 5.725-5.85 GHz(NII-3) & 5.85-5.925 GHz(NII-4) band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Configuration

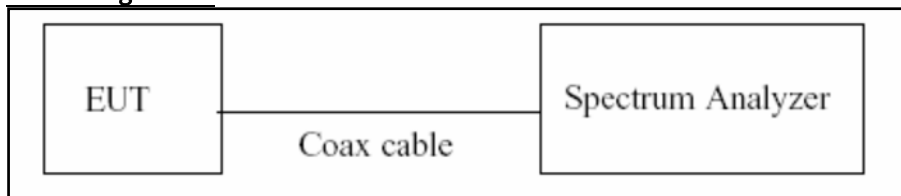

Test Procedure (26 dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.1 in KDB 789033 D02 v02r01.

1. RBW = approximately 1 % of the emission bandwidth
2. VBW > RBW
3. Detector = Peak
4. Trace mode = max hold
5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

Test Procedure (6 dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.2 in KDB 789033 D02 v02r01.

1. RBW = 100 kHz
2. VBW $\geq 3 \times$ RBW
3. Detector = Peak
4. Trace mode = max hold
5. Allow the trace to stabilize
6. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points(upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note:

1. We tested X dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.
2. DFS test channels should be defined. So, we performed the OBW test to prove that no part of the fundamental emissions of any channels belong to UNII1 and UNII3 band for DFS.
3. The 26 dB bandwidth is used to determine the conducted power limits.


8.3. Output Power Measurement

Limit


Band	Limit
UNII 1	- Master : Not exceed 1 W(=30 dBm) - Slave : Not exceed 250 mW(=23.98 dBm)
UNII 2A, 2C	Not exceed the lesser of 250 mW or 11 dBm + 10 log B, (where B is the 26 dB emission bandwidth in megahertz.)
UNII 3	Not exceed 1 W(=30 dBm)
UNII 4	EIRP 30 dBm

Test Configuration

Power Meter

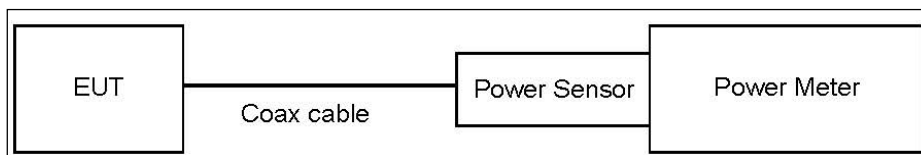

Spectrum Analyzer(Only Straddle Channel)

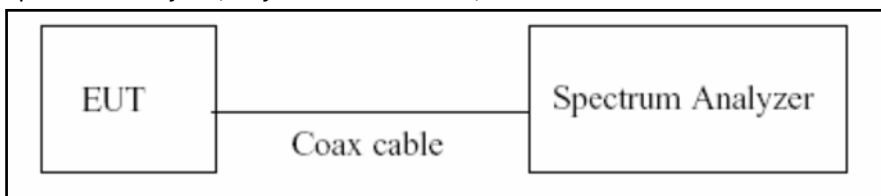

Test Procedure(Power Meter)

We tested according to Procedure E.3.a in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Add 10 log (1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Test Procedure (Spectrum Analyzer)

The transmitter output is connected to the Spectrum Analyzer.

We use the spectrum analyzer's integrated band power measurement function.

We tested according to Procedure E.2.d) in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Set span to encompass the 26 dB EBW of the signal.
3. RBW = 1 MHz.
4. VBW $\geq$ 3 MHz.
5. Number of points in sweep $\geq$ 2 x span/RBW.
6. Sweep time = auto.
7. Measurement Type or = RMS.
8. Do not use sweep triggering. Allow the sweep to "free run".
9. Trace average at least 100 traces in power averaging(RMS) mode
10. Integrated bandwidth = OBW
11. Add $10\log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation

Total Power(dBm) = Measured Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

Note

1. Spectrum Measured Levels are not plot data.

The power results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Actual value of loss for the attenuator and cable combination is below table.

Band	Ant.1 Loss(dB)	Ant.2 Loss(dB)
UNII 1	12.05	11.46
UNII 2A	12.05	11.46
UNII 2C	12.05	11.46
UNII 3&4	12.05	11.46


(Actual value of loss for the attenuator and cable combination)

8.4. Power Spectral Density

Limit

Band	Limit
UNII 1	11 dBm/MHz
UNII 2A, 2C	11 dBm/MHz
UNII 3	30 dBm/500 kHz
UNII 4	EIRP 14 dBm/MHz

Test Configuration

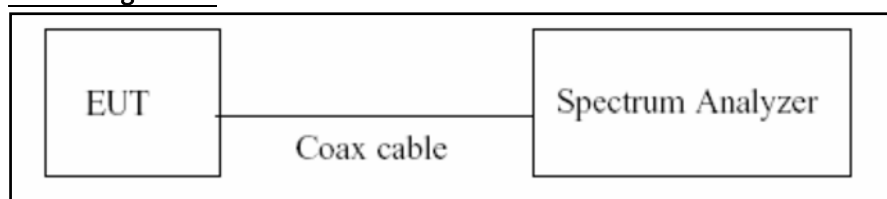

Test Procedure

We tested according to Procedure F in KDB 789033 D02 v02r01.

1. Set span to encompass the entire emission bandwidth(EBW) of the signal.
2. RBW = 1 MHz(510 kHz for UNII 3)
→For portion within the NII-3 be used RBW 510kHz
3. VBW $\geq$ 3 MHz
4. Number of points in sweep $\geq$ 2 x span/RBW.
5. Sweep time = auto.
6. Measurement Typeor = RMS(i.e., power averaging), if available. Otherwise, use sample Measurement Typeor mode.
7. Do not use sweep triggering. Allow the sweep to “free run”.
8. Trace average at least 100 traces in power averaging(RMS) mode
9. Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
10. If Method SA-2 was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.

Sample Calculation

Total PSD(dBm) = Measured Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

Note

1. Spectrum Measured Levels are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Actual value of loss for the attenuator and cable combination is below table.

Band	Ant.1 Loss(dB)	Ant.2 Loss(dB)
UNII 1	12.05	11.46
UNII 2A	12.05	11.46
UNII 2C	12.05	11.46
UNII 3&4	12.05	11.46


(Actual value of loss for the attenuator and cable combination)

8.5. Frequency Stability

Limit

Maintained within the band

Test Configuration

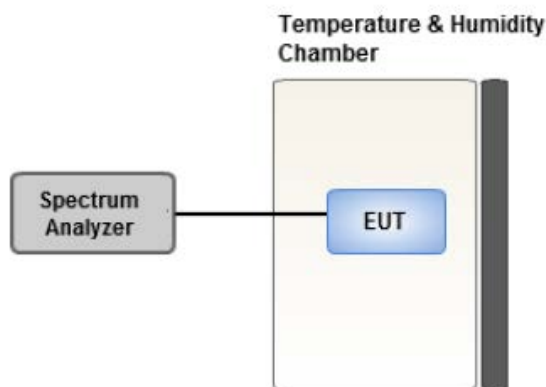

Test Procedure

1. The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -30 °C and 50 °C.
2. The temperature was incremented by 10 °C intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.
3. The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.
4. While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.

8.6. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Measurement Typeors : Quasi Peak and Average Measurement Typeor.

Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

8.7. Radiated Test

Limit

1. UNII 1: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.
2. UNII 2A, 2C: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.
3. UNII 3: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
4. UNII 4: [Low Channel O.O.B.E] measured with a Peak detector
For a client device or indoor access point or subordinate device, all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27 dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz.

[High Channel O.O.B.E] measured with an RMS detector

For a client device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of -5 dBm/MHz and shall decrease linearly to an e.i.r.p. of -27 dBm/MHz at or above 5.925 GHz.

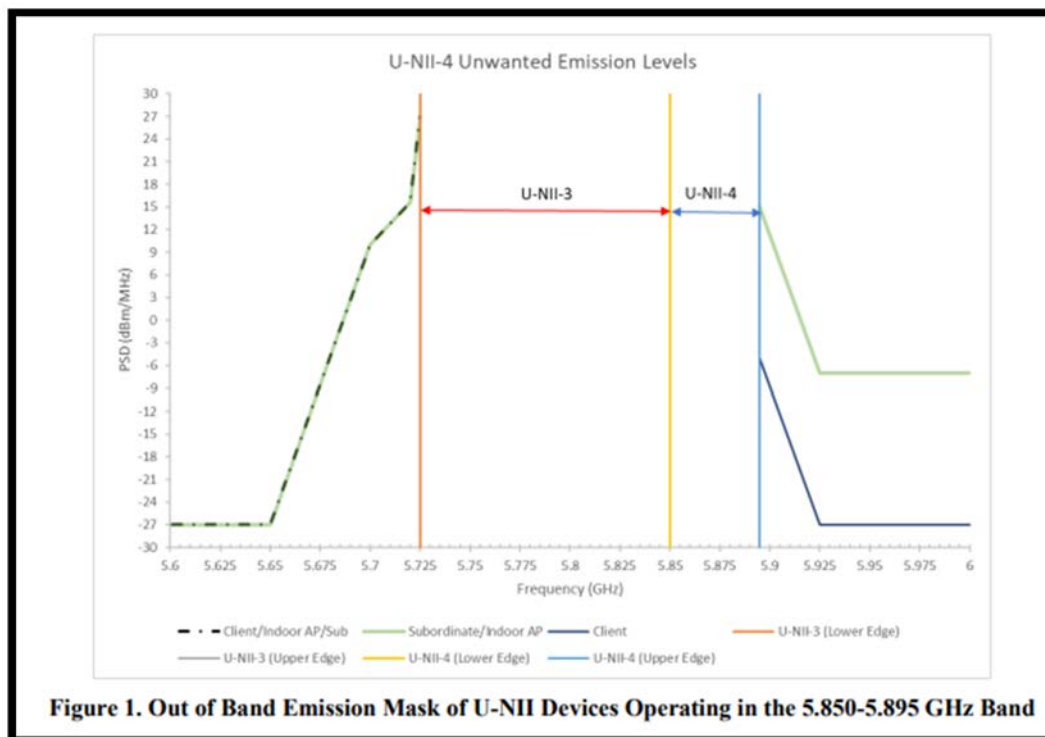



Figure 1. Out of Band Emission Mask of U-NII Devices Operating in the 5.850-5.895 GHz Band

5. All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Section 15.209.


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

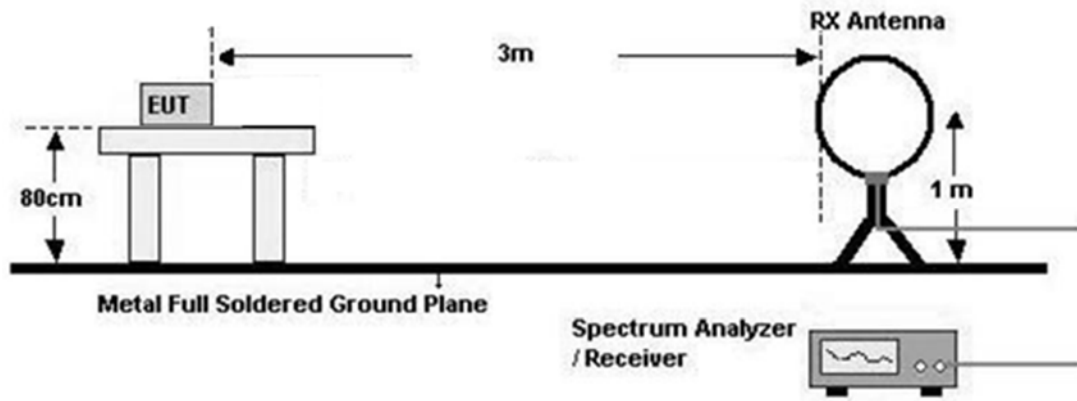

30 MHz - 1 GHz

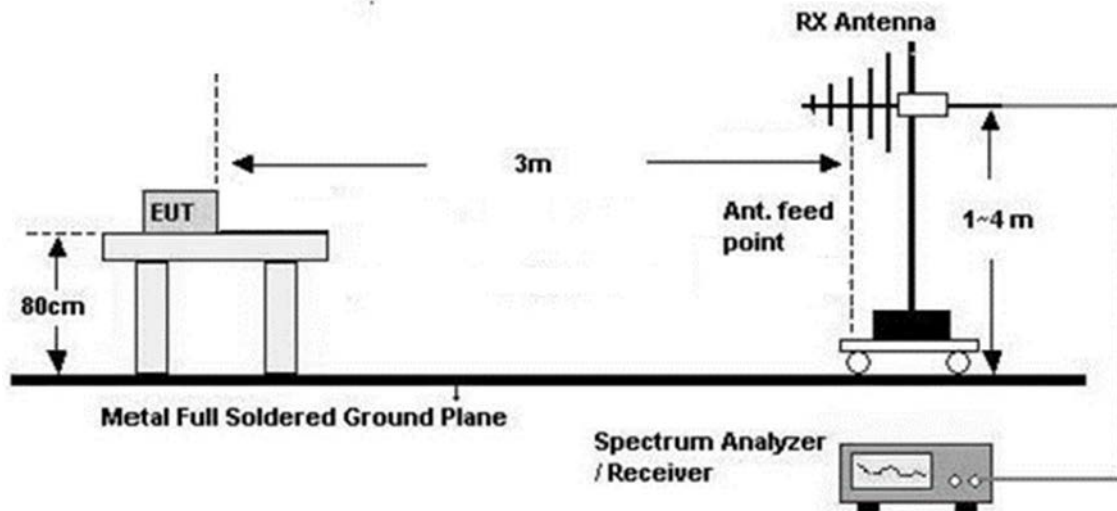

Above 1 GHz

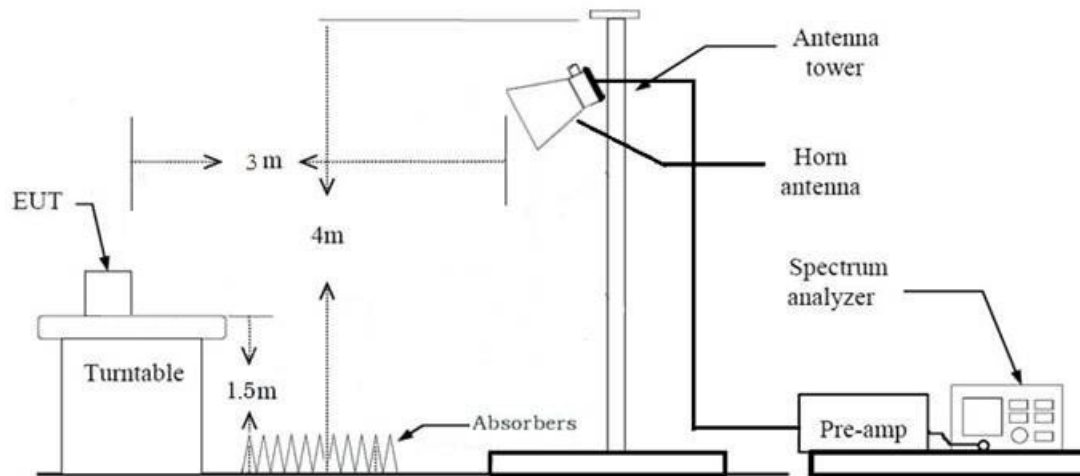

Test Procedure of Radiated spurious emissions (Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Max Hold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions (Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

6. Spectrum Setting**(1) Measurement Type(Peak):**

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Max Hold
- RBW = 100 kHz
- VBW $\geq$ 3 x RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

※In general, (1) is used mainly

7.Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)

8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.

8. Spectrum Setting**(1) Measurement Type (Peak, G.5 in KDB 789033 v02r01):**

- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = Max Hold
- Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.

(2) Measurement Type (Average, G.6.d in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW(Duty cycle $\geq$ 98 percent) = VBW $\leq$ RBW/100(i.e., 10 kHz) but not less than 10 Hz.
- VBW(Duty cycle is < 98 percent) = VBW $\geq$ $1/T$, where T is the minimum transmission duration.
- The analyzer is set to linear detector mode.
- Detector = Peak.
- Sweep time = auto.
- Trace mode = Max Hold.
- Allow Max Hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor
10. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency
11. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

$$12. \text{Total} = \text{Measured Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(A.G)} \\ + \text{Distance Factor(D.F)}$$

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.

8. Spectrum Setting

(1) Measurement Type(Peak, G.5 in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = Max Hold
- Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.

(2) Measurement Type(Average, G.6.d in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW(Duty cycle $\geq$ 98 percent) = $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz.
- VBW(Duty cycle is < 98 percent) = $VBW \geq 1/T$, where T is the minimum transmission duration.
- The analyzer is set to linear detector mode.
- Detector = Peak.
- Sweep time = auto.
- Trace mode = Max Hold.
- Allow Max Hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

9. Measured Frequency Range :

- 4 500 MHz ~ 5 150 MHz
- 5 350 MHz ~ 5 460 MHz
- 5 460 MHz ~ 5 470 MHz
- (75 MHz or more below the 5 725 MHz) ~ 5 725 MHz
- 5 850 MHz ~ (75 MHz or more above the 5 850 MHz)

10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

11. Total

(1) Measurement(Peak)

= Measured Value(Peak)

(2) Measurement(Avg)

= Measured Value (Avg)

- We apply to the offset in the range 1 GHz - 18 GHz.

- The offset = Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

– Amp. Gain(A.G) + Attenuator (ATT)

The actual setting value of VBW

Mode	Worst Data rate (Mbps)	Duty Cycle	Duty Cycle Factor (dB)	The actual setting value of VBW (Hz)
802.11a	6	0.936	0.287	1 000
802.11n(HT20)	MCS0	0.926	0.334	1 000
802.11n(HT40)	MCS0	0.862	0.646	3 000
802.11ac(VHT20)	MCS0	0.926	0.334	1 000
802.11ac(VHT40)	MCS0	0.496	3.043	3 000
802.11ac(VHT80)	MCS0	0.760	1.189	10 000
802.11ac(VHT160)	MCS0	0.718	1.437	10 000

8.8. Worst case configuration and mode

Conducted test

1. All datarate of operation were investigated and the worst case datarate results are reported.
2. SC-51F, SCG31 were tested and the worst case results are reported.
(Worst case: SC-51F)

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
 - Worstcase : Stand alone
2. All Antenna of operation were investigated and the worst case results are reported
 - Mode : SISO, Ant.1+Ant.2(SDM), Ant.1+Ant.2(CDD)
 - Worstcase : Ant.1+Ant.2(CDD)
3. EUT Axis
 - Radiated Spurious Emissions : Y
 - Radiated Restricted Band Edge : X
4. All datarate of operation were investigated and the worst case datarate results are reported.
 - 802.11a : 6 Mbps
 - 802.11n_HT20 : MCS0
 - 802.11n_HT40 : MCS0
 - 802.11ac_VHT20 : MCS0
 - 802.11ac_VHT40 : MCS0
 - 802.11ac_VHT80 : MCS0
 - 802.11ac_VHT160: MCS0
5. Radiated Spurious Emission
 - All modulation of operation were investigated and the worst case modulation results are reported.
Worst-case : 802.11a_6 Mbps
6. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position: Horizontal, Vertical, Parallel to the ground plane
7. SC-51F, SCG31 were tested and the worst case results are reported.
(Worst case: SC-51F)

Radiated test(RSDB)

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : Stand alone, Stand alone + External accessories(Earphone, Keyboard, etc)
- Worstcase : Stand alone

2. EUT Axis

- Radiated Spurious Emissions : Y, Z

3. All of RSDB Scenario were investigated and the worst case configuration results are reported.

RSDB Scenario	2.4 GHz WiFi Ant.1	2.4 GHz WiFi Ant.2	5 GHz WiFi Ant.1	5 GHz WiFi Ant.2	6 GHz WiFi Ant.1	6 GHz WiFi Ant.2	BT Ant.1	BT Ant.2	Test Case
Dual Bluetooth + 5 GHz WiFi MIMO			on	on			on	on	Scenario1
Dual Bluetooth + 6 GHz WiFi MIMO					on	on	on	on	
2.4 GHz WiFi MIMO + 5 GHz WiFi MIMO	on	on	on	on					Scenario2
2.4 GHz WiFi MIMO + 6 GHz WiFi MIMO	on	on			on	on			
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO		on	on	on			on		Scenario3
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 6 GHz WiFi MIMO		on			on	on	on		

4. The RSDB mode test investigated both intermodulation and radiated spurious emissions.

And the worst results were reported.

- Worst result: Radiated spurious emissions
- Intermodulation: No signals are generated.
- Radiated spurious emissions: cf. Section 10.6.2.

5. The following tables show the worst case configurations determined during testing.

(Worst case: The lowest margin condition the channels and modes were selected for test.)

RSDB Scenario 1	Description	Bluetooth Emission	5 GHz Emission
Dual Bluetooth + 5 GHz WiFi MIMO	Antenna	Dual ANT	Ant All
	Channel	39	48
	Data Rate	1 Mbps	6 Mbps
	Mode	GFSK	802.11a

Note : BT RSDB Data refer to [BT] Test Report

RSDB Scenario 2	Description	2.4GHz Emission	5 GHz Emission
2.4 GHz WiFi MIMO + 5 GHz WiFi MIMO	Antenna	Ant All	Ant All
	Channel	11	48
	Data Rate	1 Mbps	6 Mbps
	Mode	802.11b	802.11a

Note : DTS RSDB Data refer to [DTS] Test Report

RSDB Scenario 3	Description	Bluetooth Emission	2.4GHz Emission	5 GHz Emission
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO	Antenna	ANT1	ANT2	Ant All
	Channel	0	11	48
	Data Rate	1 Mbps	1 Mbps	6 Mbps
	Mode	GFSK	802.11b	802.11a

Note : BT, DTS RSDB Data refer to [BT], [DTS] Test Report

6. SC-51F, SCG31 were tested and the worst case results are reported.

(Worst case: SC-51F)

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : Stand alone + External accessories (Earphone,etc) + Travel Adapter,
Stand alone + Travel Adapter
- Worstcase : Stand alone + Travel Adapter

2. SC-51F, SCG31 were tested and the worst case results are reported.

(Worst case: SC-51F)

9. SUMMARY OF TEST RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
26 dB Bandwidth	§ 15.407 (for Power Measurement)	N/A	Conducted	PASS
6 dB Bandwidth	§ 15.407(e)	>500 kHz (5725-5850 MHz)(UNII-3) (5850-5895 MHz)(UNII-4)		PASS
Maximum Conducted Output Power	§ 15.407(a)(1),(2),(3)	< 250 mW(5150-5250 MHz) < 250 mW or 11+10log ₁₀ (BW) dBm (5250-5350 MHz) < 250 mW or 11+10log ₁₀ (BW) dBm (5470-5725 MHz) <1 W (5725-5850 MHz)		PASS
Maximum EIRP Output Power	§ 15.407(a)(3)(iii)	< EIRP 30dBm (5850-5895 MHz)		PASS
Maximum Power Spectral Density	§ 15.407(a)(1),(2),(3)	<11 dBm/ MHz (5150-5250 MHz) <11 dBm/ MHz (5250-5350 MHz) <11 dBm/ MHz (5470-5725 MHz) <30 dBm/500 kHz(5725-5850 MHz) < EIRP 14 dBm/MHz(5850-5895 MHz)		PASS
Frequency Stability	§ 15.407(g) § 2.1055	Maintained within the band		PASS
AC Conducted Emissions 150 kHz-30 MHz	15.207 15.407(b)(8)	<FCC 15.207 limits		PASS
Undesirable Emissions	§ 15.407(b)(1),(2),(3),(4) § 15.407(b)(5)(ii),(iii) § 15.35(b)	<-27 dBm/MHz EIRP (UNII1, 2A, 2C) cf. Section 8.6 (UNII 3&4)	Radiated	PASS
General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	15.205, 15.407(b)(9),(10)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS

10. TEST RESULT

10.1 DUTY CYCLE

Mode	Data Rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor(dB)
802.11a	6	1.465	1.565	0.936	0.287
	9	0.985	1.084	0.909	0.415
	12	0.745	0.844	0.883	0.541
	18	0.507	0.603	0.840	0.755
	24	0.385	0.484	0.796	0.992
	36	0.263	0.362	0.727	1.383
	48	0.205	0.350	0.587	2.314
	54	0.185	0.347	0.533	2.734
Mode	MCS Index	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor(dB)
802.11n (HT20)	0	1.249	1.349	0.926	0.334
	1	0.646	0.745	0.867	0.618
	2	0.443	0.540	0.822	0.853
	3	0.342	0.438	0.780	1.077
	4	0.244	0.400	0.610	2.147
	5	0.194	0.345	0.562	2.500
	6	0.175	0.352	0.496	3.042
	7	0.162	0.350	0.464	3.337
802.11n (HT40)	0	0.619	0.718	0.862	0.646
	1	0.329	0.426	0.774	1.114
	2	0.231	0.410	0.562	2.505
	3	0.185	0.380	0.487	3.128
	4	0.134	0.370	0.363	4.401
	5	0.116	0.402	0.289	5.398
	6	0.104	0.383	0.272	5.662
	7	0.096	0.383	0.252	5.992


Mode	MCS Index	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor(dB)
802.11ac (VHT20)	0	1.252	1.352	0.926	0.334
	1	0.649	0.747	0.868	0.616
	2	0.443	0.542	0.818	0.874
	3	0.345	0.443	0.777	1.095
	4	0.243	0.350	0.696	1.576
	5	0.193	0.355	0.543	2.653
	6	0.178	0.372	0.478	3.201
	7	0.163	0.357	0.457	3.405
	8	0.147	0.352	0.417	3.796
802.11ac (VHT40)	0	0.624	1.257	0.496	3.043
	1	0.532	1.072	0.496	3.041
	2	0.535	1.079	0.495	3.051
	3	0.535	1.079	0.495	3.051
	4	0.540	1.089	0.495	3.051
	5	0.540	1.089	0.495	3.051
	6	0.542	1.089	0.498	3.031
	7	0.540	1.087	0.497	3.041
	8	0.540	1.087	0.497	3.041
	9	0.540	1.087	0.497	3.041
802.11ac (VHT80)	0	0.312	0.410	0.760	1.189
	1	0.251	0.350	0.717	1.442
	2	0.253	0.350	0.725	1.399
	3	0.236	0.334	0.705	1.521
	4	0.190	0.301	0.630	2.005
	5	0.167	0.301	0.555	2.560
	6	0.160	0.312	0.512	2.906
	7	0.157	0.309	0.508	2.940
	8	0.142	0.339	0.418	3.789
	9	0.139	0.301	0.462	3.352

Mode	MCS Index	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor(dB)
802.11ac (VHT160)	0	0.252	0.350	0.718	1.437
	1	0.236	0.334	0.705	1.521
	2	0.193	0.352	0.547	2.622
	3	0.167	0.319	0.524	2.808
	4	0.144	0.320	0.451	3.456
	5	0.139	0.332	0.419	3.781
	6	0.135	0.338	0.399	3.986
	7	0.132	0.342	0.386	4.135
	8	0.130	0.350	0.371	4.301
	9	0.124	0.347	0.357	4.469


Note:

In order to simplify the report, attached plots were only the lowest data rate.


802.11a

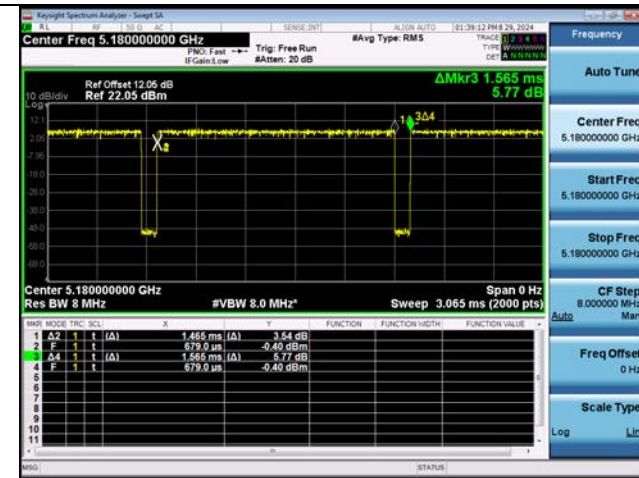


802.11n(HT20)

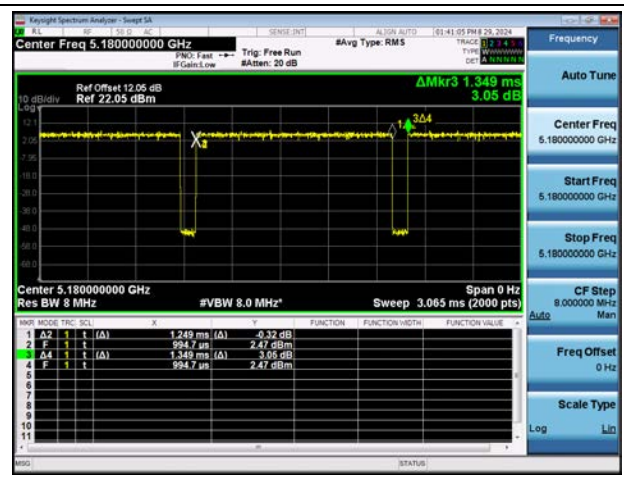


802.11n(HT40)

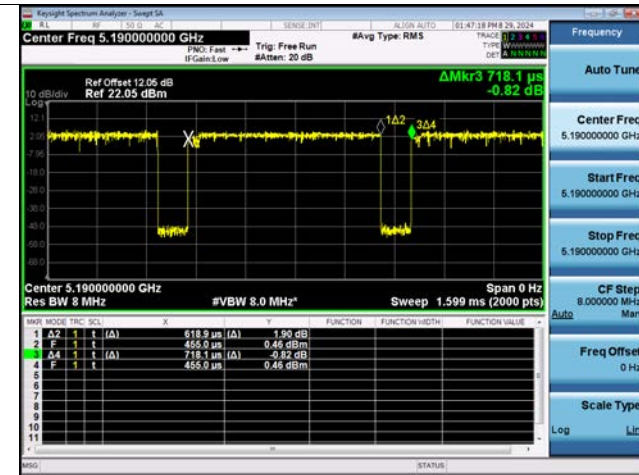


802.11ac(VHT20)

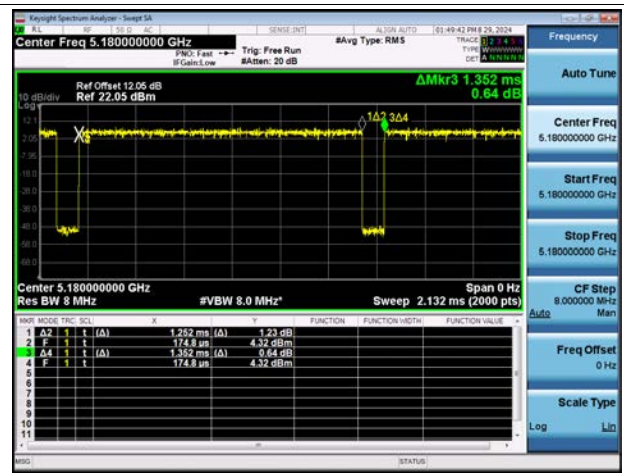


802.11ac(VHT40)

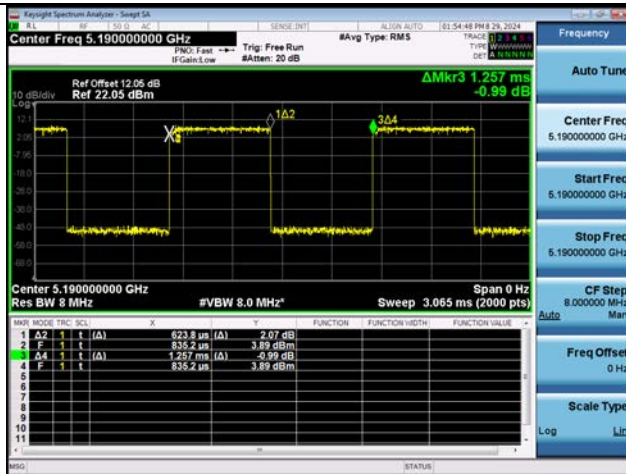

802.11ac(VHT80)

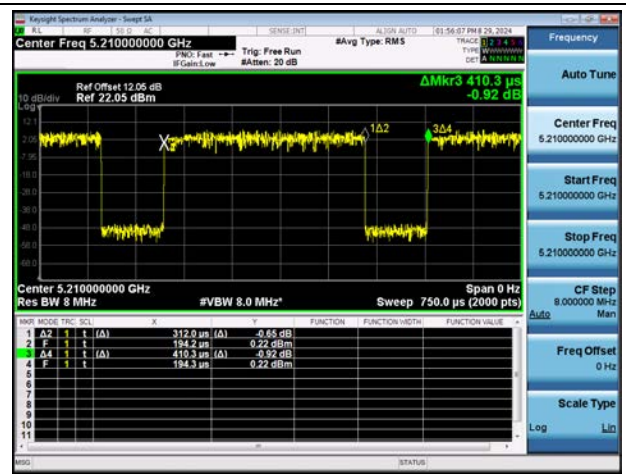

802.11ac(VHT160)

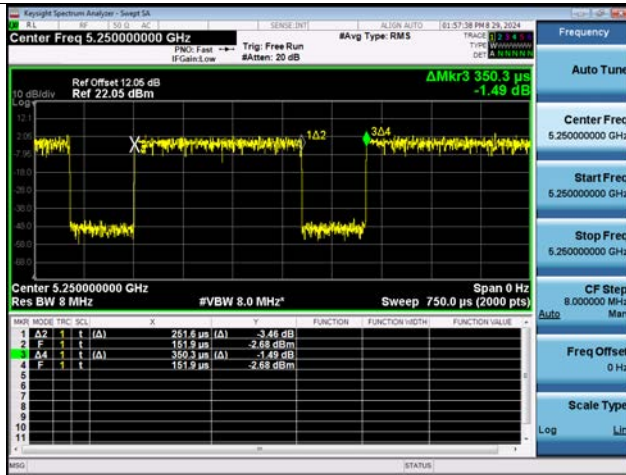

10.2 26 dB Bandwidth

Note:

Straddle channel data in the table below are for reporting purposes only. Straddle channel data were added in section 10.7.1.

[Ant.1]

Mode	Frequency [MHz]	Channel No.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
802.11a	5180	36	21.22	16.662
	5200	40	20.63	16.709
	5240	48	21.31	16.654
	5260	52	21.26	16.687
	5300	60	21.00	16.683
	5320	64	21.24	16.639
	5500	100	21.08	16.641
	5600	120	20.77	16.666
	5720	144	21.50	16.695
	5745	149	21.01	16.645
	5785	157	20.83	16.694
	5825	165	21.04	16.647
	5845	169	21.17	16.706
	5865	173	20.67	16.649
	5885	177	20.80	16.713

Mode	Frequency [MHz]	Channel No.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
802.11n (HT20)	5180	36	21.41	17.835
	5200	40	21.75	17.811
	5240	48	21.15	17.797
	5260	52	21.31	17.777
	5300	60	21.35	17.800
	5320	64	21.15	17.823
	5500	100	21.56	17.811
	5600	120	21.35	17.803
	5720	144	21.32	17.795
	5745	149	21.01	17.794
	5785	157	21.36	17.816
	5825	165	21.42	17.803
	5845	169	21.37	17.771
	5865	173	21.22	17.800
	5885	177	21.14	17.783

Mode	Frequency [MHz]	Channel No.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
802.11ac (VHT20)	5180	36	21.34	17.806
	5200	40	21.28	17.845
	5240	48	21.33	17.795
	5260	52	21.32	17.813
	5300	60	21.38	17.838
	5320	64	21.19	17.795
	5500	100	21.49	17.817
	5600	120	21.38	17.840
	5720	144	21.25	17.863
	5745	149	21.47	17.829
	5785	157	21.40	17.810
	5825	165	21.20	17.833
	5845	169	21.37	17.838
	5865	173	21.07	17.797
	5885	177	21.35	17.836

Mode	Frequency [MHz]	Channel No.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
802.11n (HT40)	5190	38	42.66	36.489
	5230	46	42.56	36.415
	5270	54	41.92	36.468
	5310	62	41.99	36.493
	5510	102	42.40	36.443
	5590	118	42.88	36.460
	5710	142	42.54	36.473
	5755	151	42.76	36.499
	5795	159	42.37	36.464
	5835	167	42.31	36.480
	5875	175	42.49	36.493

Mode	Frequency [MHz]	Channel No.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
802.11ac (VHT40)	5190	38	42.66	36.483
	5230	46	42.92	36.469
	5270	54	42.54	36.435
	5310	62	42.65	36.445
	5510	102	42.63	36.492
	5590	118	42.32	36.365
	5710	142	43.07	36.460
	5755	151	42.81	36.508
	5795	159	42.21	36.469
	5835	167	42.32	36.479
	5875	175	43.28	36.428

Mode	Frequency [MHz]	Channel No.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
802.11ac (VHT80)	5210	42	91.24	76.248
	5290	58	90.20	76.279
	5530	106	88.89	76.264
	5610	122	92.73	76.306
	5690	138	90.94	76.265
	5775	155	92.71	76.355
	5855	171	91.14	76.385
Mode	Frequency [MHz]	Channel No.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
802.11ac (VHT160)	5250	50	176.0	156.03
	5570	114	181.5	156.09
	5815	163	178.5	155.96

[Ant.2]

Mode	Frequency [MHz]	Channel No.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
802.11a	5180	36	21.25	16.694
	5200	40	21.19	16.679
	5240	48	21.30	16.692
	5260	52	21.41	16.695
	5300	60	21.29	16.700
	5320	64	21.12	16.664
	5500	100	21.11	16.704
	5600	120	21.27	16.677
	5720	144	21.04	16.724
	5745	149	21.11	16.696
	5785	157	21.23	16.697
	5825	165	21.21	16.687
	5845	169	21.10	16.687
	5865	173	21.22	16.687
	5885	177	21.23	16.662

Mode	Frequency [MHz]	Channel No.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
802.11n (HT20)	5180	36	21.40	17.814
	5200	40	21.56	17.812
	5240	48	21.45	17.814
	5260	52	21.37	17.813
	5300	60	21.52	17.844
	5320	64	21.48	17.824
	5500	100	21.42	17.832
	5600	120	21.12	17.823
	5720	144	21.41	17.838
	5745	149	21.33	17.848
	5785	157	21.34	17.792
	5825	165	21.72	17.835
	5845	169	21.38	17.828
	5865	173	21.35	17.826
	5885	177	21.08	17.839

Mode	Frequency [MHz]	Channel No.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
802.11ac (VHT20)	5180	36	21.45	17.832
	5200	40	21.45	17.856
	5240	48	21.57	17.834
	5260	52	21.48	17.832
	5300	60	21.47	17.824
	5320	64	21.68	17.854
	5500	100	21.55	17.832
	5600	120	21.39	17.846
	5720	144	21.51	17.839
	5745	149	21.50	17.833
	5785	157	21.42	17.840
	5825	165	21.38	17.823
	5845	169	21.71	17.837
	5865	173	21.53	17.837
	5885	177	21.53	17.855

Mode	Frequency [MHz]	Channel No.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
802.11n (HT40)	5190	38	42.65	36.495
	5230	46	42.84	36.523
	5270	54	42.62	36.505
	5310	62	42.80	36.522
	5510	102	42.87	36.537
	5590	118	43.00	36.508
	5710	142	42.84	36.532
	5755	151	42.65	36.508
	5795	159	43.06	36.546
	5835	167	42.71	36.533
	5875	175	42.81	36.480

Mode	Frequency [MHz]	Channel No.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
802.11ac (VHT40)	5190	38	42.61	36.517
	5230	46	42.59	36.487
	5270	54	42.40	36.504
	5310	62	42.99	36.503
	5510	102	42.78	36.494
	5590	118	42.54	36.516
	5710	142	42.44	36.443
	5755	151	42.66	36.521
	5795	159	42.26	36.487
	5835	167	42.43	36.469
	5875	175	42.30	36.497


Mode	Frequency [MHz]	Channel No.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
802.11ac (VHT80)	5210	42	92.41	76.558
	5290	58	92.72	76.326
	5530	106	92.44	76.350
	5610	122	91.58	76.301
	5690	138	90.91	76.438
	5775	155	93.15	76.424
	5855	171	90.62	76.327
Mode	Frequency [MHz]	Channel No.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
802.11ac (VHT160)	5250	50	176.5	155.59
	5570	114	174.8	155.79
	5815	163	174.6	155.57

[ANT. 1]


☒ Test Plots

Note: In order to simplify the report, attached plots were only the widest channel per channel bandwidth.


802.11a 26 dB Bandwidth (CH 144)

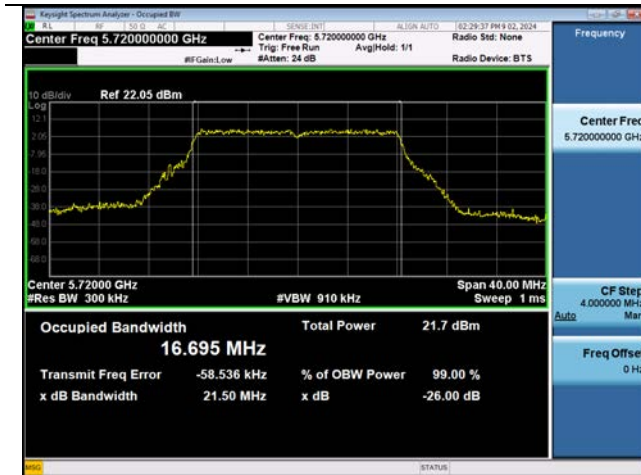


802.11n(HT20) 26 dB Bandwidth (CH 40)

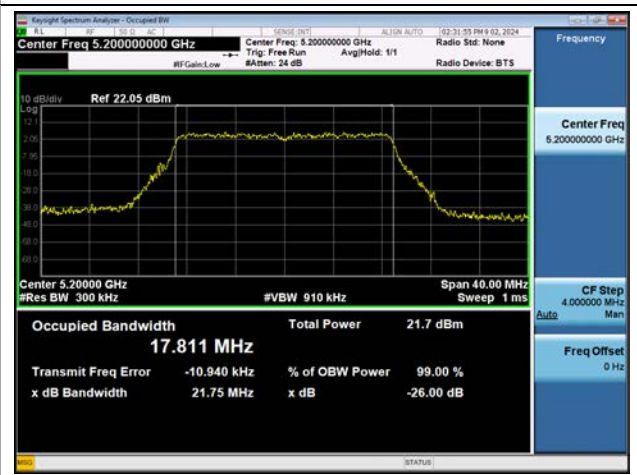

802.11ac(VHT20) 26 dB Bandwidth (CH 100)

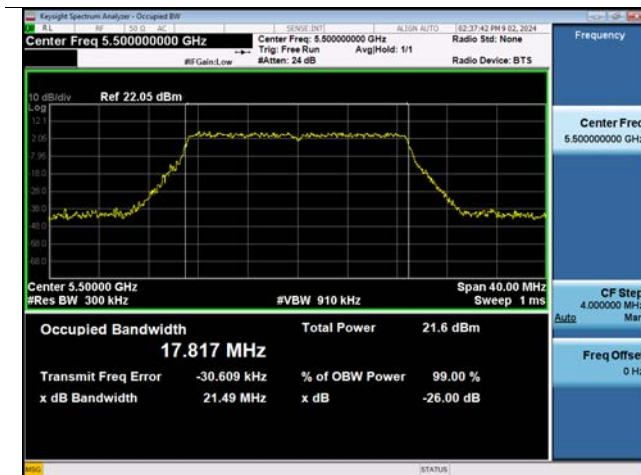

802.11n(HT40) 26 dB Bandwidth (CH 118)

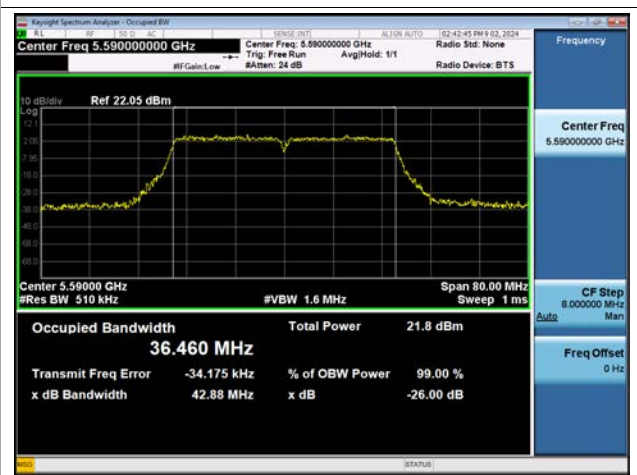

802.11ac(VHT40) 26 dB Bandwidth (CH 175)



802.11ac(VHT80) 26 dB Bandwidth (CH 122)



802.11ac(VHT160) 26 dB Bandwidth (CH 114)



[ANT. 2]

☒ Test Plots

Note: In order to simplify the report, attached plots were only the widest channel per channel bandwidth.


802.11a 26 dB Bandwidth (CH 52)




802.11n(HT20) 26 dB Bandwidth (CH 165)



802.11ac(VHT20) 26 dB Bandwidth (CH 169)

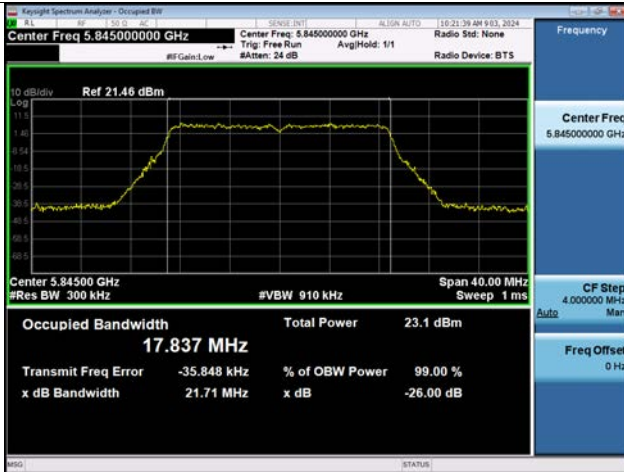

802.11n(HT40) 26 dB Bandwidth (CH 159)

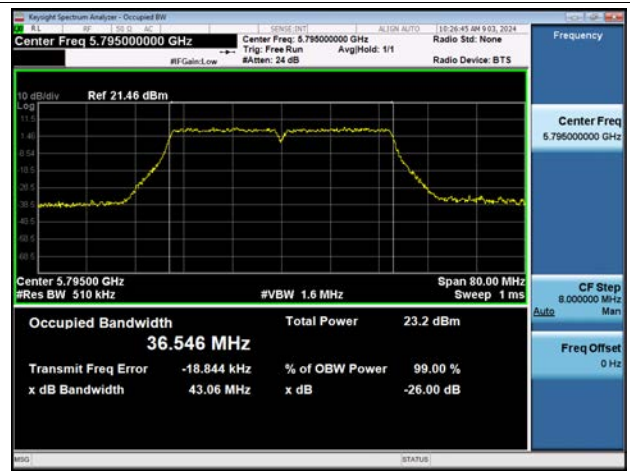

802.11ac(VHT40) 26 dB Bandwidth (CH 62)



802.11ac(VHT80) 26 dB Bandwidth (CH 155)



802.11ac(VHT160) 26 dB Bandwidth (CH 50)



10.3 6 dB BANDWIDTH

[Ant.1]

Mode	Frequency [MHz]	Channel No.	6 dB Bandwidth [MHz]	Limit [MHz]
802.11a	5745	149	16.40	0.500
	5785	157	16.39	0.500
	5825	165	16.40	0.500
	5845	169	16.39	0.500
	5865	173	16.41	0.500
	5885	177	16.40	0.500

Mode	Frequency [MHz]	Channel No.	6 dB Bandwidth [MHz]	Limit [MHz]
802.11n(HT20)	5745	149	17.65	0.500
	5785	157	17.62	0.500
	5825	165	17.63	0.500
	5845	169	17.64	0.500
	5865	173	17.62	0.500
	5885	177	17.62	0.500

Mode	Frequency [MHz]	Channel No.	6 dB Bandwidth [MHz]	Limit [MHz]
802.11ac(VHT20)	5745	149	17.63	0.500
	5785	157	17.62	0.500
	5825	165	17.63	0.500
	5845	169	17.63	0.500
	5865	173	17.62	0.500
	5885	177	17.63	0.500

Mode	Frequency [MHz]	Channel No.	6 dB Bandwidth [MHz]	Limit [MHz]
802.11n(HT40)	5755	151	36.43	0.500
	5795	159	36.45	0.500
	5835	167	36.42	0.500
	5875	175	36.42	0.500

Mode	Frequency [MHz]	Channel No.	6 dB Bandwidth [MHz]	Limit [MHz]
802.11ac(VHT40)	5755	151	36.42	0.500
	5795	159	36.43	0.500
	5835	167	36.41	0.500
	5875	175	36.40	0.500

Mode	Frequency [MHz]	Channel No.	6 dB Bandwidth [MHz]	Limit [MHz]
802.11ac(VHT80)	5775	155	76.39	0.500
802.11ac(VHT80)	5855	171	76.36	0.500

Mode	Frequency [MHz]	Channel No.	6 dB Bandwidth [MHz]	Limit [MHz]
802.11ac(VHT160)	5815	163	156.0	0.500

[Ant.2]

Mode	Frequency [MHz]	Channel No.	6 dB Bandwidth [MHz]	Limit [MHz]
802.11a	5745	149	16.40	0.500
	5785	157	16.40	0.500
	5825	165	16.38	0.500
	5845	169	16.41	0.500
	5865	173	16.41	0.500
	5885	177	16.41	0.500

Mode	Frequency [MHz]	Channel No.	6 dB Bandwidth [MHz]	Limit [MHz]
802.11n(HT20)	5745	149	17.63	0.500
	5785	157	17.63	0.500
	5825	165	17.63	0.500
	5845	169	17.63	0.500
	5865	173	17.63	0.500
	5885	177	17.61	0.500

Mode	Frequency [MHz]	Channel No.	6 dB Bandwidth [MHz]	Limit [MHz]
802.11ac(VHT20)	5745	149	17.64	0.500
	5785	157	17.64	0.500
	5825	165	17.64	0.500
	5845	169	17.62	0.500
	5865	173	17.63	0.500
	5885	177	17.65	0.500

Mode	Frequency [MHz]	Channel No.	6 dB Bandwidth [MHz]	Limit [MHz]
802.11n(HT40)	5755	151	36.45	0.500
	5795	159	36.44	0.500
	5835	167	36.43	0.500
	5875	175	36.43	0.500

Mode	Frequency [MHz]	Channel No.	6 dB Bandwidth [MHz]	Limit [MHz]
802.11ac(VHT40)	5755	151	36.42	0.500
	5795	159	36.43	0.500
	5835	167	36.43	0.500
	5875	175	36.43	0.500

Mode	Frequency [MHz]	Channel No.	6 dB Bandwidth [MHz]	Limit [MHz]
802.11ac(VHT80)	5775	155	76.44	0.500
802.11ac(VHT80)	5855	171	76.36	0.500

Mode	Frequency [MHz]	Channel No.	6 dB Bandwidth [MHz]	Limit [MHz]
802.11ac(VHT160)	5815	163	156.2	0.500

[ANT. 1]

☐ Test Plots

Note: In order to simplify the report, attached plots were only the narrowest channel.


802.11a (CH.157)



802.11n(HT20) (CH.173)




802.11ac(VHT20) (CH.173)

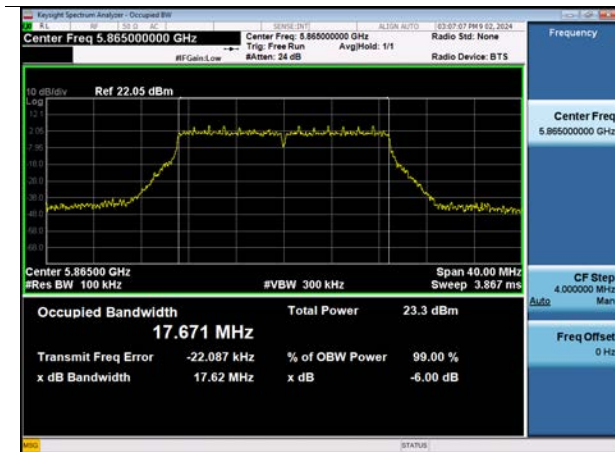

802.11n(HT40) (CH.175)




802.11ac(VHT40) (CH.175)

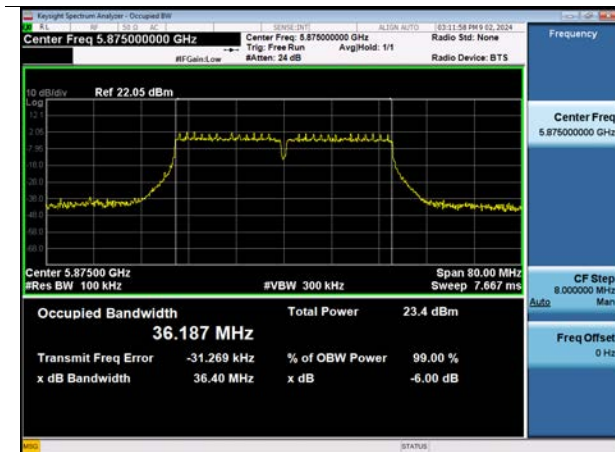

802.11ac(VHT80) (CH.171)




802.11ac(VHT160) (CH.163)

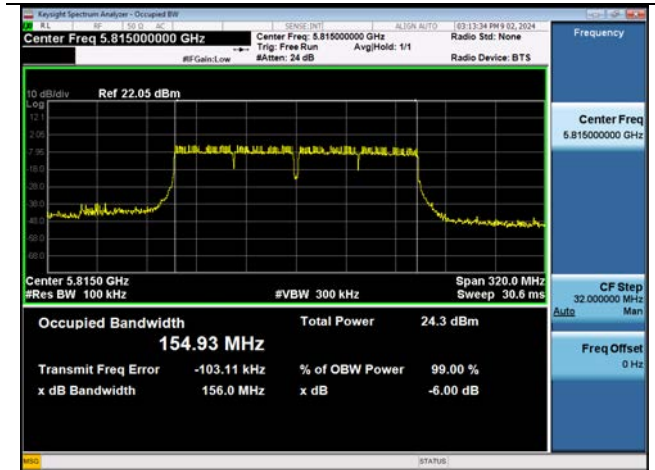

[ANT. 2]

Note: In order to simplify the report, attached plots were only the narrowest channel.


802.11a (CH.165)

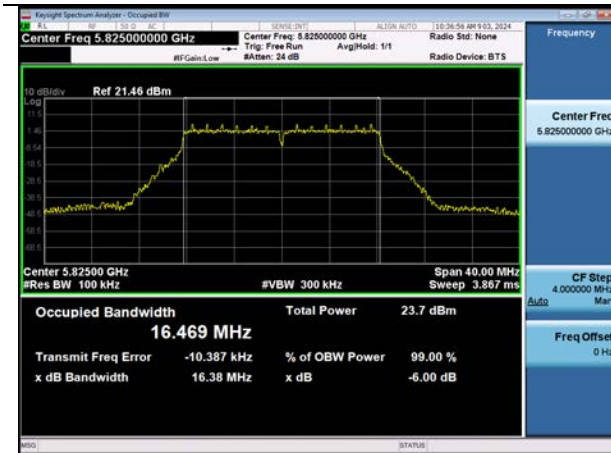


802.11n(HT20) (CH.177)




802.11ac(VHT20) (CH.169)

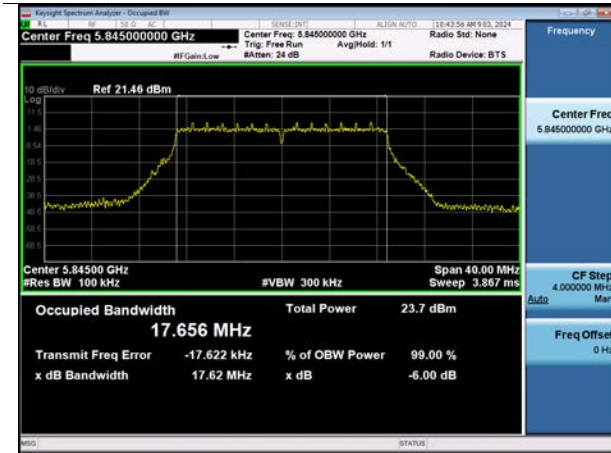

802.11n(HT40) (CH.167)

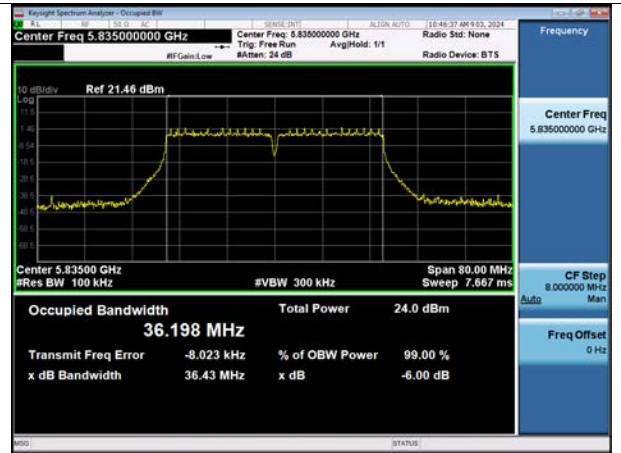

802.11ac(VHT40) (CH.151)

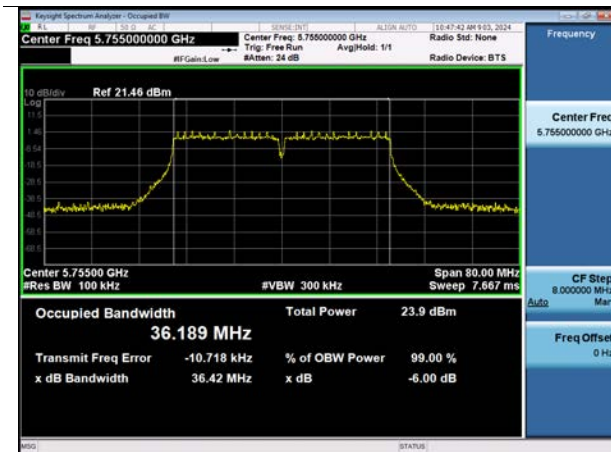

802.11ac(VHT80) (CH.171)



802.11ac(VHT160) (CH.163)



10.4 OUTPUT POWER MEASUREMENT

Straddle channel data in the table below are for reporting purposes only.

Straddle channel data were added in section 10.7.3.

Limit

(UNII 1) : 23.98 dBm

(UNII 2A, 2C) : 23.98 dBm or $11 \text{ dBm} + 10 \log B$, (where B is the 26 dB emission bandwidth in megahertz.)

(UNII 3) : 30.00 dBm

(UNII 4) : EIRP 30.0 dBm/MHz

(UNII 3&4) : Worst limit 30.00 dBm → UNII 4 Band Antenna Gain Negative

[MIMO_CDD(Ant.1+ Ant.2)]

Ant Total Power [dBm] = Measured Power [dBm] + Duty Cycle Factor [dB]

MIMO_CDD(Ant.1+ Ant.2) Total Power [dBm] = Ant.1 Total Power [dBm] + Ant.2 Total Power [dBm]

Frequency [MHz]	Channel No.	Worstcase Datarate	Mode(802.11)	Ant.1 Total Power [dBm]	Ant.2 Total Power [dBm]	MIMO Total Power [dBm]	Directional Gain [dBi]	E.I.R.P [dBm]	Limit [dBm]
5180	36	6M	a	16.16	16.13	19.15	-	-	23.98
5200	40	6M	a	16.55	16.40	19.48	-	-	23.98
5240	48	6M	a	16.87	16.52	19.71	-	-	23.98
5260	52	6M	a	16.47	16.11	19.30	-	-	23.98
5300	60	6M	a	17.06	16.52	19.81	-	-	23.98
5320	64	6M	a	15.69	15.15	18.44	-	-	23.98
5500	100	6M	a	15.55	15.36	18.46	-	-	23.98
5600	120	6M	a	16.30	16.92	19.63	-	-	23.98
5720	144	6M	a	16.35	17.14	19.77	-	-	23.98
5745	149	6M	a	16.53	16.59	19.57	-	-	30.00
5785	157	6M	a	16.54	16.50	19.53	-	-	30.00
5825	165	6M	a	16.76	16.67	19.72	-	-	30.00
5845	169	6M	a	16.83	16.63	19.74	-1.87	17.87	EIRP ≤ 30dBm
5865	173	6M	a	16.67	16.60	19.64	-1.87	17.77	EIRP ≤ 30dBm
5885	177	6M	a	16.08	16.06	19.08	-1.87	17.21	EIRP ≤ 30dBm

Frequency [MHz]	Channel No.	Worstcase Datarate	Mode(802.11)	Ant.1 Total Power [dBm]	Ant.2 Total Power [dBm]	MIMO Total Power [dBm]	Directional Gain [dBi]	E.I.R.P [dBm]	Limit [dBm]
5180	36	MCS0	n20	16.32	16.11	19.23	-	-	23.98
5200	40	MCS0	n20	16.65	16.29	19.49	-	-	23.98
5240	48	MCS0	n20	16.94	16.43	19.71	-	-	23.98
5260	52	MCS0	n20	16.57	16.02	19.32	-	-	23.98
5300	60	MCS0	n20	17.20	16.43	19.85	-	-	23.98
5320	64	MCS0	n20	15.75	15.16	18.48	-	-	23.98
5500	100	MCS0	n20	15.56	15.25	18.42	-	-	23.98
5600	120	MCS0	n20	16.36	16.80	19.60	-	-	23.98
5720	144	MCS0	n20	16.42	17.03	19.75	-	-	23.98
5745	149	MCS0	n20	16.62	16.58	19.61	-	-	30.00
5785	157	MCS0	n20	16.65	16.58	19.63	-	-	30.00
5825	165	MCS0	n20	16.87	16.63	19.77	-	-	30.00
5845	169	MCS0	n20	16.86	16.62	19.76	-1.87	17.89	EIRP ≤ 30dBm
5865	173	MCS0	n20	16.94	16.59	19.78	-1.87	17.91	EIRP ≤ 30dBm
5885	177	MCS0	n20	16.09	16.06	19.09	-1.87	17.22	EIRP ≤ 30dBm

Frequency [MHz]	Channel No.	Worstcase Datarate	Mode(802.11)	Ant.1 Total Power [dBm]	Ant.2 Total Power [dBm]	MIMO Total Power [dBm]	Directional Gain [dBi]	E.I.R.P [dBm]	Limit [dBm]
5180	36	MCS0	ac20	16.06	15.61	18.85	-	-	23.98
5200	40	MCS0	ac20	16.71	16.32	19.53	-	-	23.98
5240	48	MCS0	ac20	17.05	16.55	19.82	-	-	23.98
5260	52	MCS0	ac20	16.62	16.06	19.36	-	-	23.98
5300	60	MCS0	ac20	16.15	15.35	18.78	-	-	23.98
5320	64	MCS0	ac20	15.57	15.17	18.39	-	-	23.98
5500	100	MCS0	ac20	15.43	15.33	18.39	-	-	23.98
5600	120	MCS0	ac20	16.43	16.80	19.63	-	-	23.98
5720	144	MCS0	ac20	16.53	17.08	19.83	-	-	23.98
5745	149	MCS0	ac20	16.61	16.51	19.57	-	-	30.00
5785	157	MCS0	ac20	16.66	16.53	19.61	-	-	30.00
5825	165	MCS0	ac20	16.89	16.66	19.79	-	-	30.00
5845	169	MCS0	ac20	16.95	16.57	19.78	-1.87	17.91	EIRP ≤ 30dBm
5865	173	MCS0	ac20	16.83	16.54	19.70	-1.87	17.83	EIRP ≤ 30dBm
5885	177	MCS0	ac20	16.08	16.07	19.09	-1.87	17.22	EIRP ≤ 30dBm

Frequency [MHz]	Channel No.	Worstcase Datarate	Mode(802.11)	Ant.1 Total Power [dBm]	Ant.2 Total Power [dBm]	MIMO Total Power [dBm]	Directional Gain [dBi]	E.I.R.P [dBm]	Limit [dBm]
5190	38	MCS0	n40	12.54	12.31	15.43	-	-	23.98
5230	46	MCS0	n40	17.10	16.56	19.84	-	-	23.98
5270	54	MCS0	n40	17.01	16.29	19.67	-	-	23.98
5310	62	MCS0	n40	13.02	12.30	15.68	-	-	23.98
5510	102	MCS0	n40	11.40	11.56	14.49	-	-	23.98
5590	118	MCS0	n40	16.58	16.88	19.74	-	-	23.98
5710	142	MCS0	n40	16.74	17.20	19.98	-	-	23.98
5755	151	MCS0	n40	16.72	16.71	19.72	-	-	30.00
5795	159	MCS0	n40	16.78	16.68	19.74	-	-	30.00
5835	167	MCS0	n40	16.96	16.78	19.88	-1.87	18.01	EIRP ≤ 30dBm
5875	175	MCS0	n40	16.49	16.31	19.41	-1.87	17.54	EIRP ≤ 30dBm

Frequency [MHz]	Channel No.	Worstcase Datarate	Mode(802.11)	Ant.1 Total Power [dBm]	Ant.2 Total Power [dBm]	MIMO Total Power [dBm]	Directional Gain [dBi]	E.I.R.P [dBm]	Limit [dBm]
5190	38	MCS0	ac40	13.62	13.35	16.50	-	-	23.98
5230	46	MCS0	ac40	17.12	16.46	19.82	-	-	23.98
5270	54	MCS0	ac40	17.09	16.29	19.72	-	-	23.98
5310	62	MCS0	ac40	12.96	12.39	15.70	-	-	23.98
5510	102	MCS0	ac40	11.44	11.47	14.47	-	-	23.98
5590	118	MCS0	ac40	16.92	16.86	19.90	-	-	23.98
5710	142	MCS0	ac40	16.78	17.19	20.00	-	-	23.98
5755	151	MCS0	ac40	16.69	16.61	19.66	-	-	30.00
5795	159	MCS0	ac40	16.80	16.57	19.70	-	-	30.00
5835	167	MCS0	ac40	16.88	16.74	19.82	-1.87	17.95	EIRP ≤ 30dBm
5875	175	MCS0	ac40	16.55	16.40	19.49	-1.87	17.62	EIRP ≤ 30dBm

Frequency [MHz]	Channel No.	Worstcase Datarate	Mode(802.11)	Ant.1 Total Power [dBm]	Ant.2 Total Power [dBm]	MIMO Total Power [dBm]	Directional Gain [dBi]	E.I.R.P [dBm]	Limit [dBm]
5210	42	MCS0	ac80	11.55	11.20	14.39	-	-	23.98
5290	58	MCS0	ac80	11.90	11.40	14.67	-	-	23.98
5530	106	MCS0	ac80	11.17	11.38	14.29	-	-	23.98
5610	122	MCS0	ac80	16.40	16.72	19.57	-	-	23.98
5690	138	MCS0	ac80	16.63	17.04	19.85	-	-	23.98
5775	155	MCS0	ac80	16.33	16.26	19.30	-	-	30.00
5855	171	MCS0	ac80	16.16	16.01	19.10	-1.87	17.23	EIRP ≤ 30dBm

Frequency [MHz]	Channel No.	Worstcase Datarate	Mode(802.11)	Ant.1 Total Power [dBm]	Ant.2 Total Power [dBm]	MIMO Total Power [dBm]	Directional Gain [dBi]	E.I.R.P [dBm]	Limit [dBm]
5250	50	MCS0	ac160	12.36	12.12	15.25	-	-	23.98
5570	114	MCS0	ac160	11.19	11.56	14.39	-	-	23.98
5815	163	MCS0	ac160	13.24	13.14	16.20	-1.87	14.33	EIRP ≤ 30dBm

10.5 POWER SPECTRAL DENSITY

[MIMO_CDD(Ant.1+ Ant.2)]

Ant Total PSD [dBm] = Measured PSD [dBm] + Duty Cycle Factor [dB]

MIMO_CDD(ANT.1+ ANT.2)Total PSD [dBm] = Ant.1 Total PSD [dBm] + Ant.2 Total PSD [dB]

Frequency [MHz]	Channel No.	Worstcase Datarate	Mode(802.11)	Ant.1 Total PSD [dBm]	Ant.2 Total PSD [dBm]	MIMO Total PSD [dBm]	Directional Gain [dBi]	E.I.R.P [dBm]	Limit [dBm]
5180	36	6M	a	2.045	1.312	4.704	-	-	11 dBm/MHz
5200	40	6M	a	2.265	1.755	5.028	-	-	11 dBm/MHz
5240	48	6M	a	2.535	1.809	5.197	-	-	11 dBm/MHz
5260	52	6M	a	2.234	1.371	4.834	-	-	11 dBm/MHz
5300	60	6M	a	2.786	2.104	5.468	-	-	11 dBm/MHz
5320	64	6M	a	1.179	0.510	3.867	-	-	11 dBm/MHz
5500	100	6M	a	0.862	1.079	3.982	-	-	11 dBm/MHz
5600	120	6M	a	1.673	2.527	5.131	-	-	11 dBm/MHz
5720	144	6M	a	1.860	3.064	5.514	-	-	11 dBm/MHz
5745	149	6M	a	-0.821	-0.128	2.549	-	-	30 dBm/500kHz
5785	157	6M	a	-0.517	-0.084	2.715	-	-	30 dBm/500kHz
5825	165	6M	a	-0.618	-0.069	2.675	-	-	30 dBm/500kHz
5845	169	6M	a	2.060	2.742	5.424	-1.87	3.554	14 dBm/EIRP
5865	173	6M	a	1.949	2.537	5.263	-1.87	3.393	14 dBm/EIRP
5885	177	6M	a	1.453	2.199	4.852	-1.87	2.982	14 dBm/EIRP

Frequency [MHz]	Channel No.	Worstcase Datarate	Mode(802.11)	Ant.1 Total PSD [dBm]	Ant.2 Total PSD [dBm]	MIMO Total PSD [dBm]	Directional Gain [dBi]	E.I.R.P [dBm]	Limit [dBm]
5180	36	MCS0	n20	1.412	1.118	4.278	-	-	11 dBm/MHz
5200	40	MCS0	n20	2.002	1.798	4.912	-	-	11 dBm/MHz
5240	48	MCS0	n20	1.935	1.650	4.806	-	-	11 dBm/MHz
5260	52	MCS0	n20	1.662	1.497	4.591	-	-	11 dBm/MHz
5300	60	MCS0	n20	2.405	1.139	4.829	-	-	11 dBm/MHz
5320	64	MCS0	n20	0.596	-0.483	3.101	-	-	11 dBm/MHz
5500	100	MCS0	n20	0.244	0.635	3.455	-	-	11 dBm/MHz
5600	120	MCS0	n20	0.806	1.872	4.382	-	-	11 dBm/MHz
5720	144	MCS0	n20	1.182	2.378	4.832	-	-	11 dBm/MHz
5745	149	MCS0	n20	-1.393	-0.877	1.883	-	-	30 dBm/500kHz
5785	157	MCS0	n20	-1.023	-0.717	2.143	-	-	30 dBm/500kHz
5825	165	MCS0	n20	-1.073	-0.543	2.211	-	-	30 dBm/500kHz
5845	169	MCS0	n20	1.492	2.056	4.794	-1.87	2.924	14 dBm/EIRP
5865	173	MCS0	n20	1.274	2.503	4.943	-1.87	3.073	14 dBm/EIRP
5885	177	MCS0	n20	0.795	1.676	4.269	-1.87	2.399	14 dBm/EIRP

Frequency [MHz]	Channel No.	Worstcase Datarate	Mode(802.11)	Ant.1 Total PSD [dBm]	Ant.2 Total PSD [dBm]	MIMO Total PSD [dBm]	Directional Gain [dBi]	E.I.R.P [dBm]	Limit [dBm]
5180	36	MCS0	ac20	0.519	1.023	3.788	-	-	11 dBm/MHz
5200	40	MCS0	ac20	1.281	2.097	4.718	-	-	11 dBm/MHz
5240	48	MCS0	ac20	1.816	1.925	4.881	-	-	11 dBm/MHz
5260	52	MCS0	ac20	1.106	0.993	4.060	-	-	11 dBm/MHz
5300	60	MCS0	ac20	0.998	0.728	3.875	-	-	11 dBm/MHz
5320	64	MCS0	ac20	0.010	0.189	3.110	-	-	11 dBm/MHz
5500	100	MCS0	ac20	0.140	0.577	3.374	-	-	11 dBm/MHz
5600	120	MCS0	ac20	0.435	1.834	4.201	-	-	11 dBm/MHz
5720	144	MCS0	ac20	0.995	2.349	4.735	-	-	11 dBm/MHz
5745	149	MCS0	ac20	-1.711	-0.999	1.670	-	-	30 dBm/500kHz
5785	157	MCS0	ac20	-1.859	-0.917	1.648	-	-	30 dBm/500kHz
5825	165	MCS0	ac20	-1.580	-0.701	1.892	-	-	30 dBm/500kHz
5845	169	MCS0	ac20	1.294	2.176	4.767	-1.87	2.897	14 dBm/EIRP
5865	173	MCS0	ac20	1.353	1.856	4.622	-1.87	2.752	14 dBm/EIRP
5885	177	MCS0	ac20	0.337	1.269	3.838	-1.87	1.968	14 dBm/EIRP

Frequency [MHz]	Channel No.	Worstcase Datarate	Mode(802.11)	Ant.1 Total PSD [dBm]	Ant.2 Total PSD [dBm]	MIMO Total PSD [dBm]	Directional Gain [dBi]	E.I.R.P [dBm]	Limit [dBm]
5190	38	MCS0	n40	-7.970	-7.803	-4.876	-	-	11 dBm/MHz
5230	46	MCS0	n40	-3.633	-3.542	-0.577	-	-	11 dBm/MHz
5270	54	MCS0	n40	-3.735	-4.042	-0.876	-	-	11 dBm/MHz
5310	62	MCS0	n40	-7.665	-7.665	-4.655	-	-	11 dBm/MHz
5510	102	MCS0	n40	-9.602	-8.415	-5.958	-	-	11 dBm/MHz
5590	118	MCS0	n40	-4.496	-3.033	-0.693	-	-	11 dBm/MHz
5710	142	MCS0	n40	-4.031	-2.984	-0.466	-	-	11 dBm/MHz
5755	151	MCS0	n40	-6.356	-5.636	-2.971	-	-	30 dBm/500kHz
5795	159	MCS0	n40	-6.133	-5.842	-2.975	-	-	30 dBm/500kHz
5835	167	MCS0	n40	-3.976	-3.544	-0.745	-1.87	-2.615	14 dBm/EIRP
5875	175	MCS0	n40	-4.439	-3.618	-0.999	-1.87	-2.869	14 dBm/EIRP

Frequency [MHz]	Channel No.	Worstcase Datarate	Mode(802.11)	Ant.1 Total PSD [dBm]	Ant.2 Total PSD [dBm]	MIMO Total PSD [dBm]	Directional Gain [dBi]	E.I.R.P [dBm]	Limit [dBm]
5190	38	MCS0	ac40	-1.867	-1.392	1.387	-	-	11 dBm/MHz
5230	46	MCS0	ac40	1.843	2.017	4.941	-	-	11 dBm/MHz
5270	54	MCS0	ac40	1.607	1.530	4.579	-	-	11 dBm/MHz
5310	62	MCS0	ac40	-2.218	-2.072	0.866	-	-	11 dBm/MHz
5510	102	MCS0	ac40	-4.279	-2.899	-0.524	-	-	11 dBm/MHz
5590	118	MCS0	ac40	0.880	2.259	4.634	-	-	11 dBm/MHz
5710	142	MCS0	ac40	1.377	2.448	4.956	-	-	11 dBm/MHz
5755	151	MCS0	ac40	-2.194	-0.696	1.629	-	-	30 dBm/500kHz
5795	159	MCS0	ac40	-1.936	-0.734	1.717	-	-	30 dBm/500kHz
5835	167	MCS0	ac40	1.270	2.029	4.676	-1.87	2.806	14 dBm/EIRP
5875	175	MCS0	ac40	1.153	1.661	4.425	-1.87	2.555	14 dBm/EIRP

Frequency [MHz]	Channel No.	Worstcase Datarate	Mode(802.11)	Ant.1 Total PSD [dBm]	Ant.2 Total PSD [dBm]	MIMO Total PSD [dBm]	Directional Gain [dBi]	E.I.R.P [dBm]	Limit [dBm]
5210	42	MCS0	ac80	-8.004	-7.918	-4.950	-	-	11 dBm/MHz
5290	58	MCS0	ac80	-7.775	-8.110	-4.929	-	-	11 dBm/MHz
5530	106	MCS0	ac80	-9.290	-7.834	-5.490	-	-	11 dBm/MHz
5610	122	MCS0	ac80	-4.206	-2.632	-0.337	-	-	11 dBm/MHz
5690	138	MCS0	ac80	-4.028	-2.160	0.016	-	-	11 dBm/MHz
5775	155	MCS0	ac80	-6.629	-5.987	-3.285	-	-	30 dBm/500kHz
5855	171	MCS0	ac80	-3.583	-3.126	-0.338	-1.87	-2.208	14 dBm/EIRP

Frequency [MHz]	Channel No.	Worstcase Datarate	Mode(802.11)	Ant.1 Total PSD [dBm]	Ant.2 Total PSD [dBm]	MIMO Total PSD [dBm]	Directional Gain [dBi]	E.I.R.P [dBm]	Limit [dBm]
5250	50	MCS0	ac160	-10.519	-10.318	-7.407	-	-	11 dBm/MHz
5570	114	MCS0	ac160	-12.351	-11.051	-8.642	-	-	11 dBm/MHz
5815	163	MCS0	ac160	-10.465	-9.512	-6.952	-1.87	-8.822	14 dBm/EIRP

[MIMO_CDD(Ant.1+ Ant.2)]


Test Plots

Note: In order to simplify the report, attached plots were only channel of the highest PSD.


ANT. 1

ANT. 2


802.11a UNII 1-2C (Ch. 144)

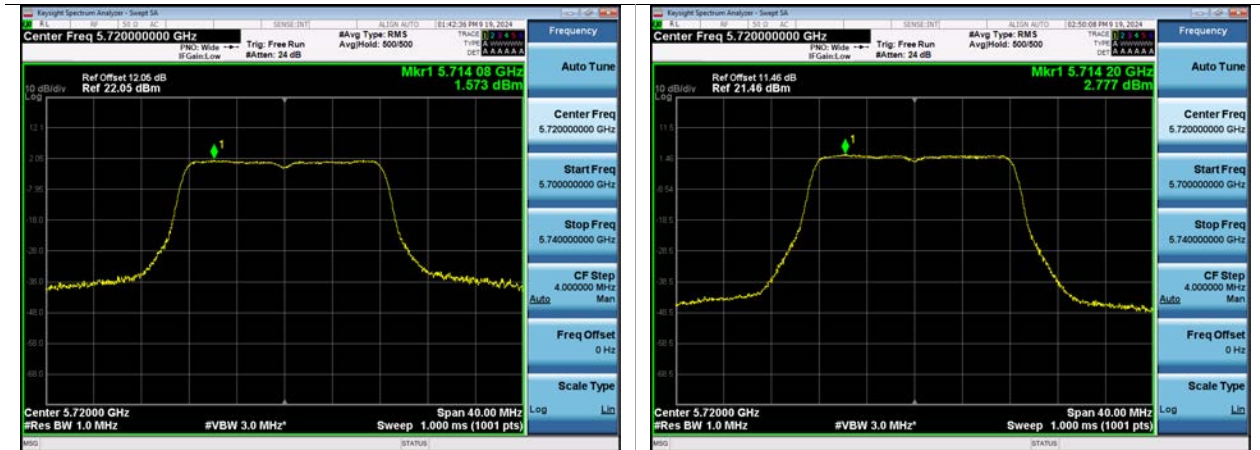

802.11a UNII 3 (Ch. 157)

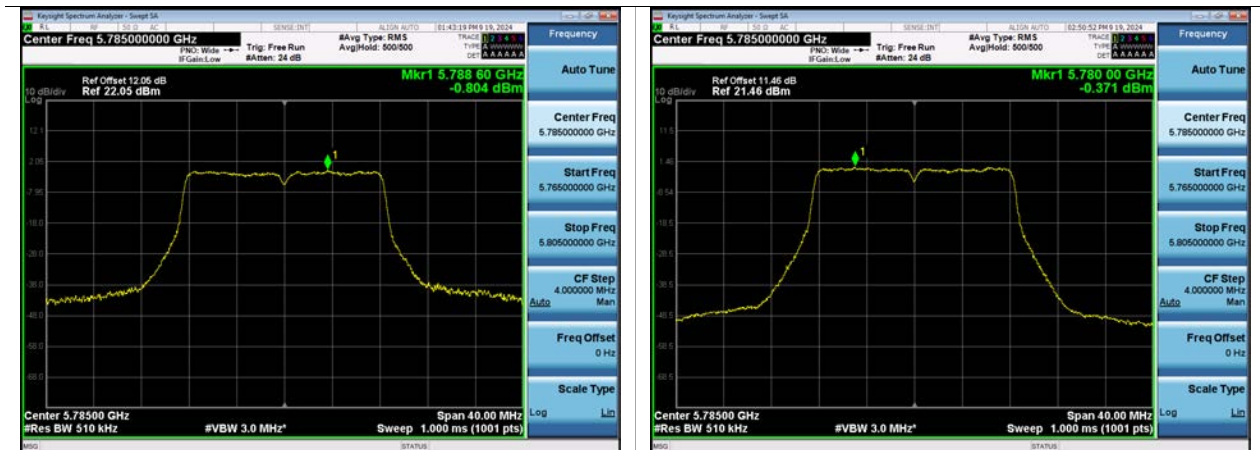



802.11a UNII 4 (Ch. 169)

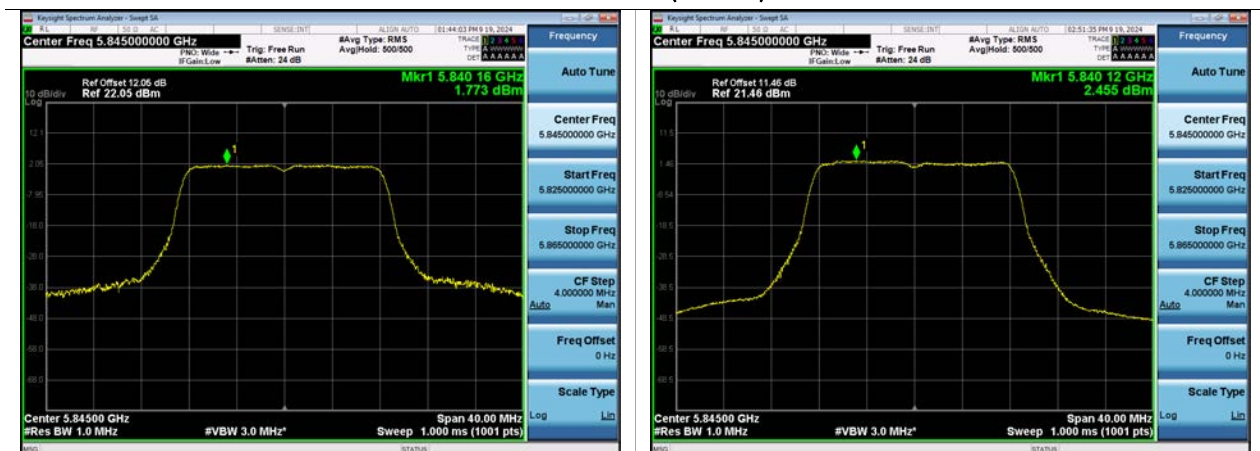


ANT. 1

ANT. 2



802.11n(HT20) UNII 1-2C (Ch. 40)

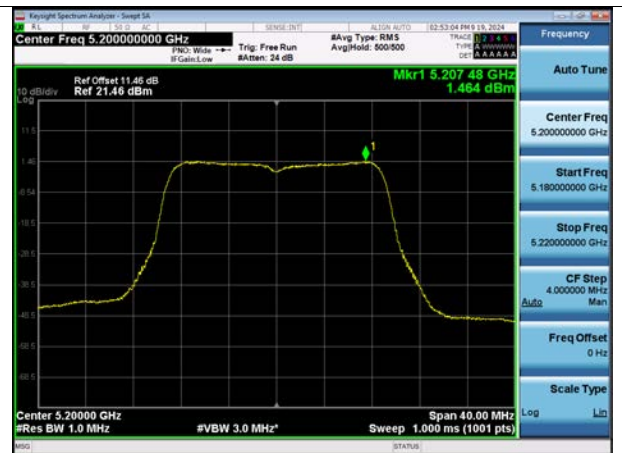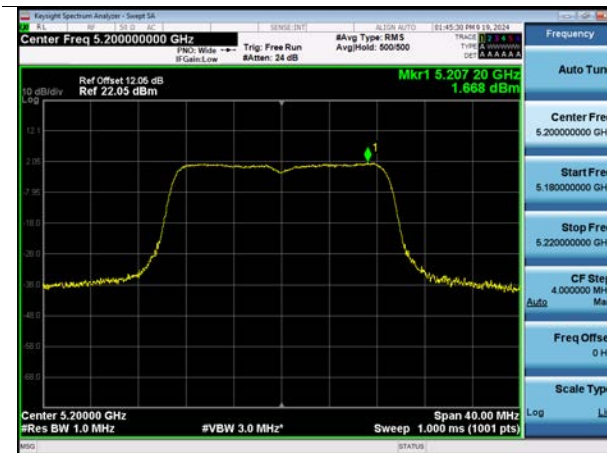

802.11 n(HT20) UNII 3 (Ch. 165)

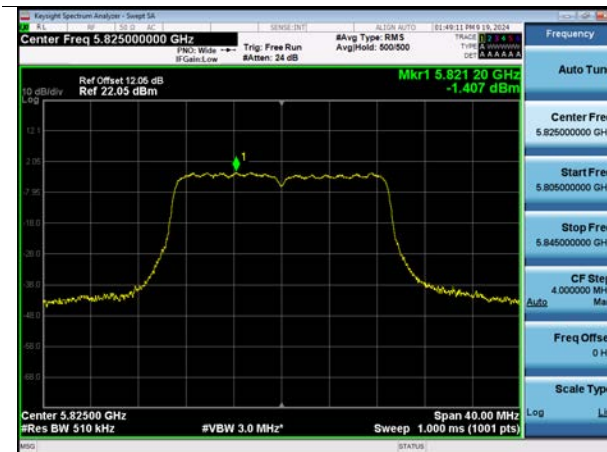


802.11 n(HT20) UNII 4 (Ch. 173)

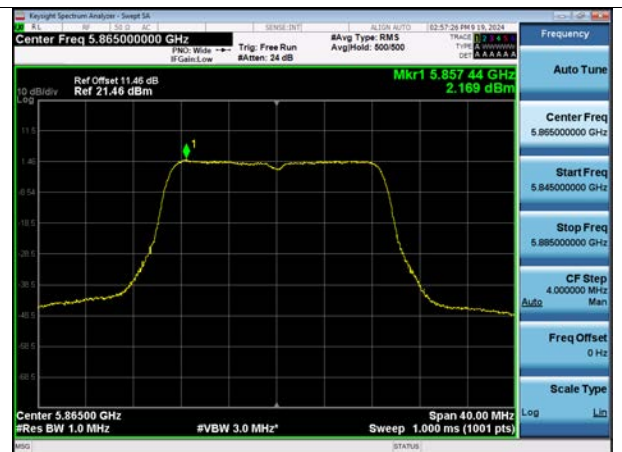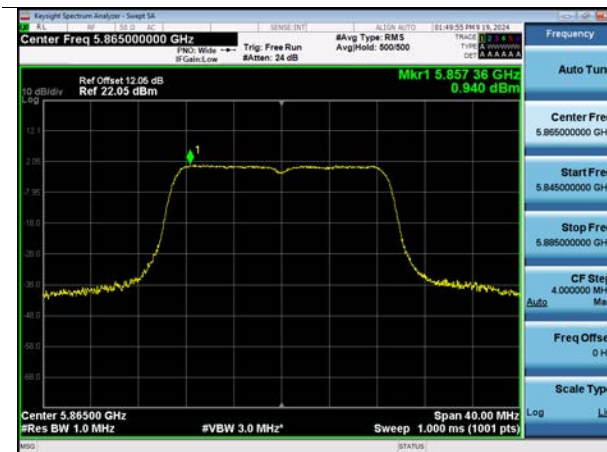


ANT. 1

ANT. 2


802.11ac(VHT20) UNII 1-2C (Ch. 48)

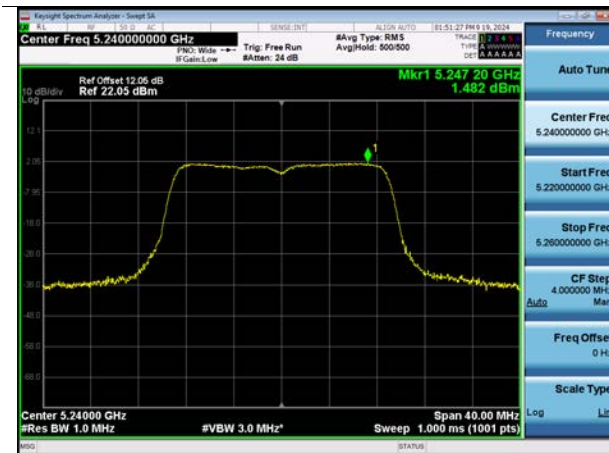

802.11 ac(VHT20) UNII 3 (Ch. 165)

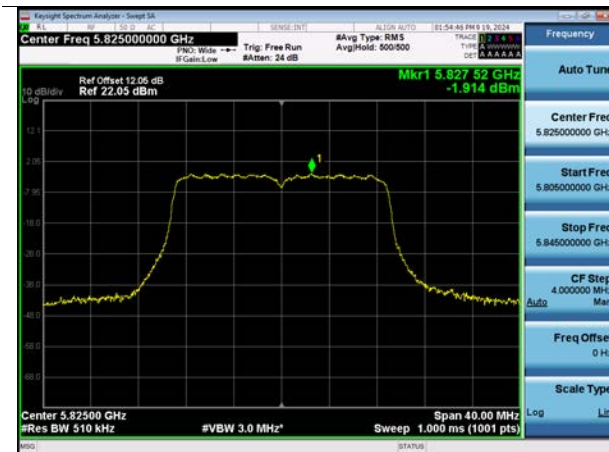


802.11 ac(VHT20) UNII 4 (Ch. 169)

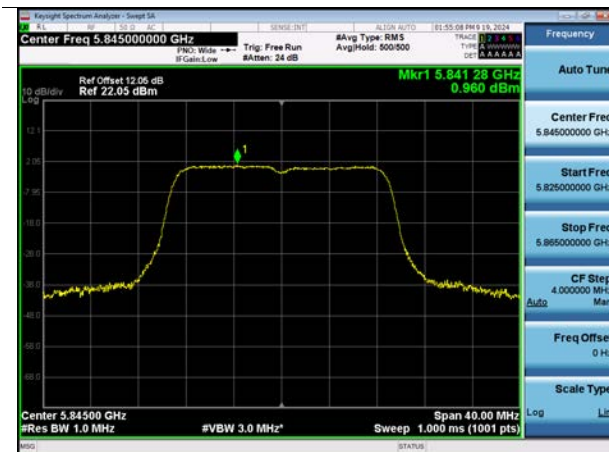



ANT. 1

ANT. 2


802.11n(HT40) UNII 1-2C (Ch. 142)

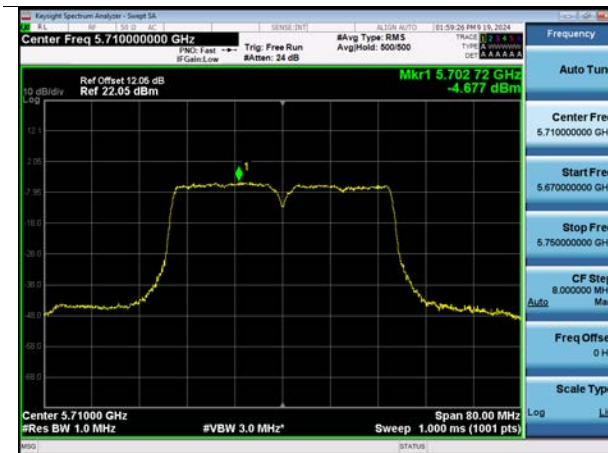

802.11 n(HT40) UNII 3 (Ch. 151)

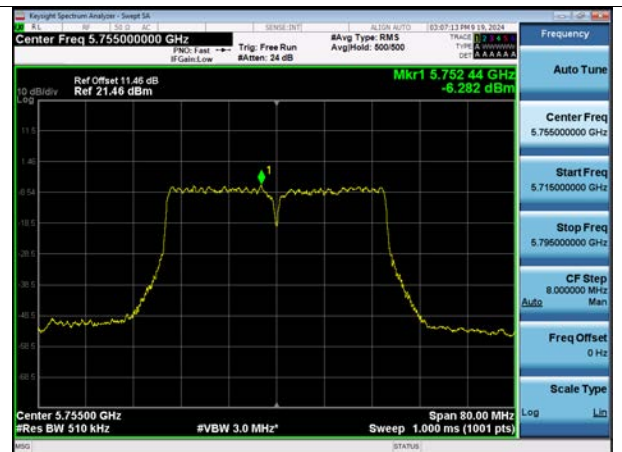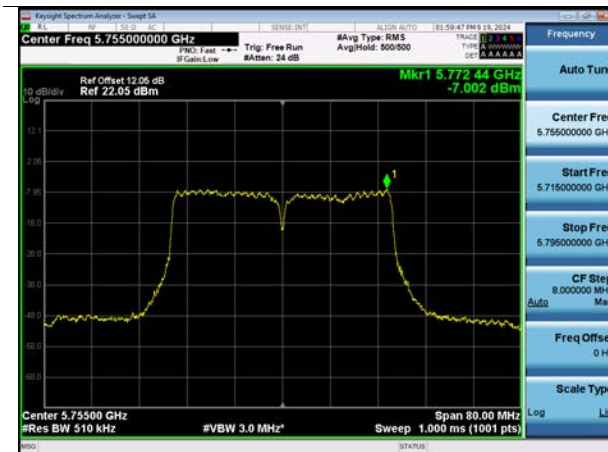


802.11 n(HT40) UNII 4 (Ch. 167)

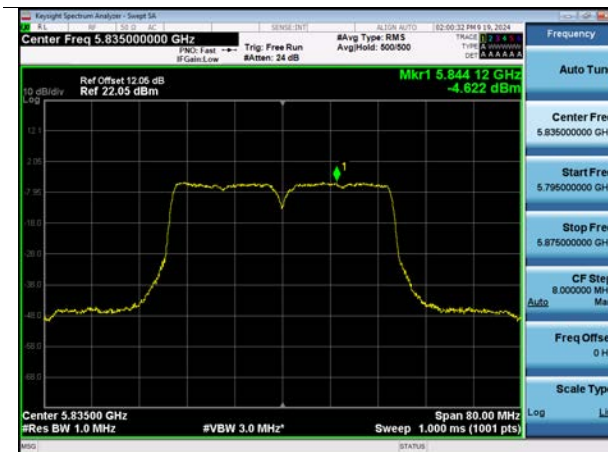


ANT. 1

ANT. 2


802.11ac(VHT40) UNII 1-2C (Ch. 142)

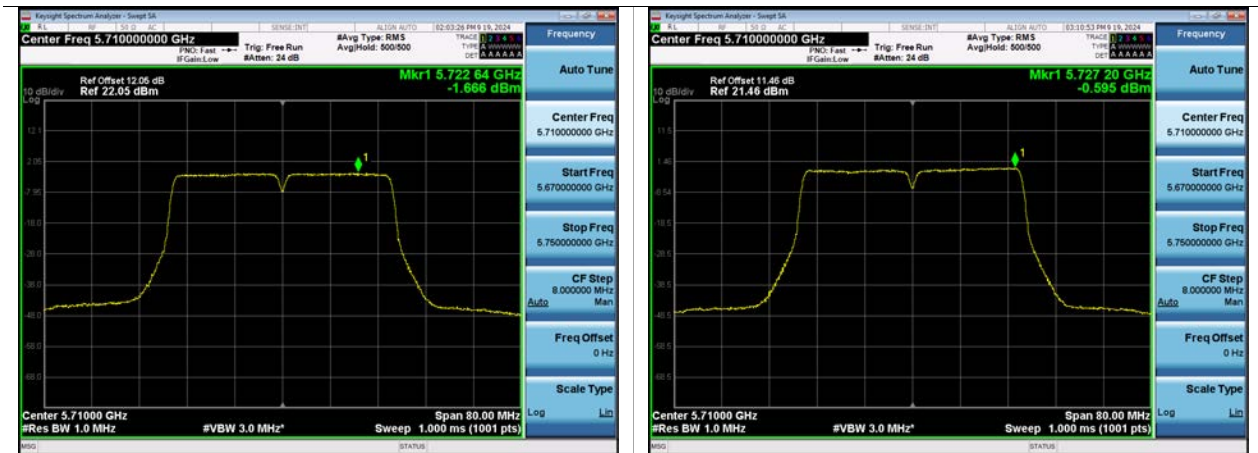

802.11 ac(VHT40) UNII 3 (Ch. 159)

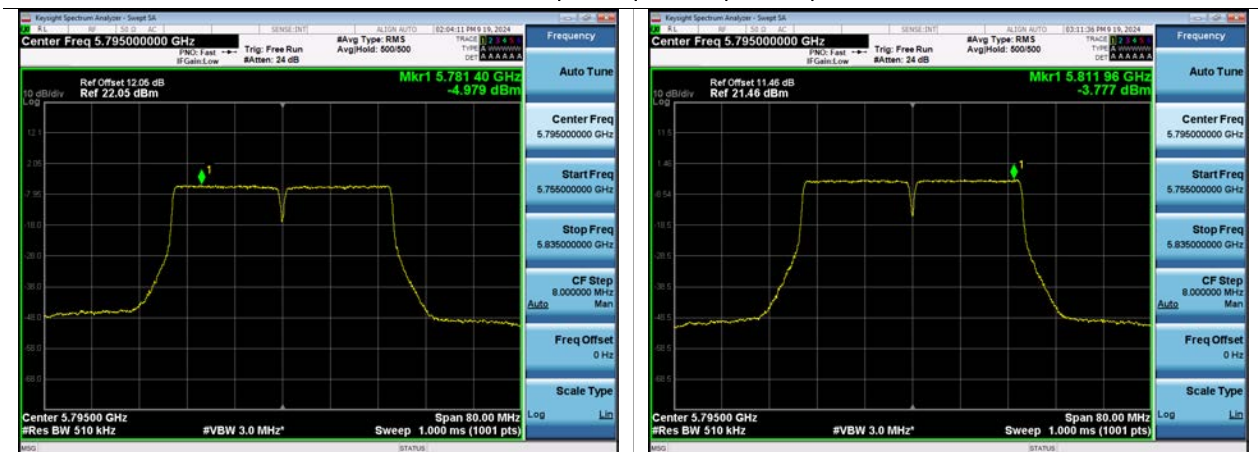


802.11 ac(VHT40) UNII 4 (Ch. 167)

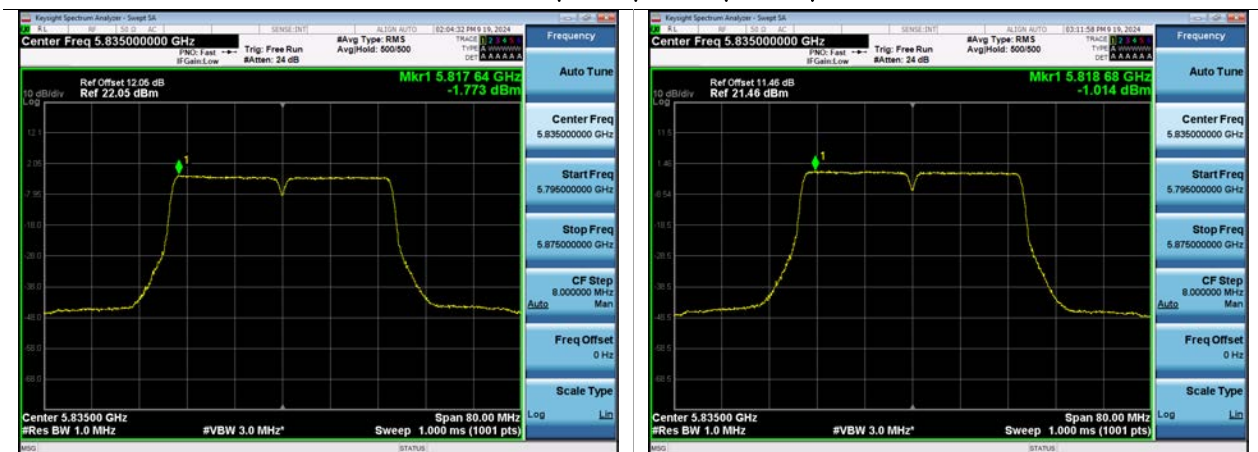

ANT. 1

ANT. 2


802.11ac(VHT80) UNII 1-2C (Ch. 138)

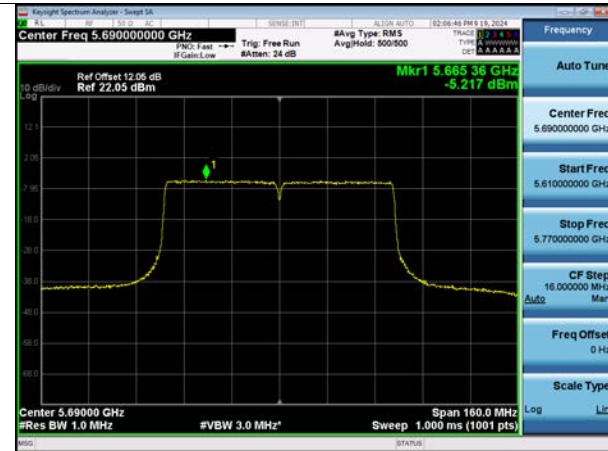

802.11 ac(VHT80) UNII 3 (Ch. 155)



802.11 ac(VHT80) UNII 4 (Ch. 171)

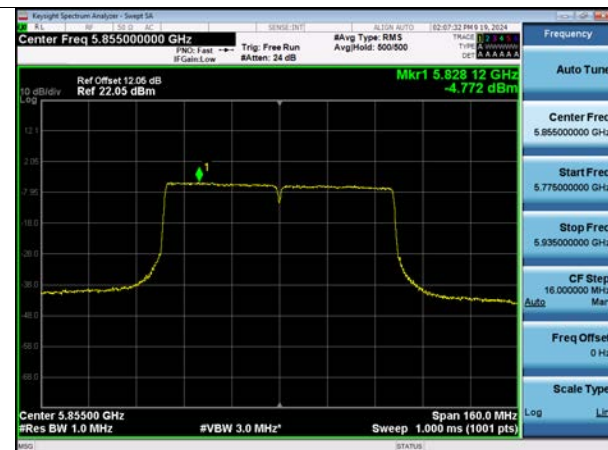

ANT. 1

ANT. 2

802.11ac(VHT160) UNII 1-2C (Ch. 50)



802.11 ac(VHT160) UNII 3-4 (Ch. 163)



10.6 FREQUENCY STABILITY

Note:

1. All modes of operation were investigated and the worst case configuration results are reported.
2. Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

10.6.1 802.11ac 160 MHz BW

[MIMO_CDD(Ant1+Ant2)]

Startup after the EUT is energized

OPERATING BAND:	UNII Band 1 & 2A
OPERATING FREQUENCY:	5,250,000,000 Hz
CHANNEL:	50
REFERENCE VOLTAGE:	3.88 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	3.88	+20(Ref)	5250018.62	18.62
100%		-30	5250018.30	18.30
100%		-20	5250011.62	11.62
100%		-10	5250034.40	34.40
100%		0	5250030.48	30.48
100%		+10	5250018.62	18.62
100%		+30	5250016.71	16.71
100%		+40	5250022.65	22.65
100%		+50	5250011.95	11.95
High	4.48	+20	5250011.00	11.00
Low	3.70	+20	5250023.15	23.15

OPERATING BAND:	UNII Band 2C
OPERATING FREQUENCY:	5,570,000,000 Hz
CHANNEL:	114
REFERENCE VOLTAGE:	3.88 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	3.88	+20(Ref)	5570032.64	32.64
100%		-30	5570020.91	20.91
100%		-20	5570022.32	22.32
100%		-10	5570013.44	13.44
100%		0	5570013.42	13.42
100%		+10	5570022.19	22.19
100%		+30	5570016.35	16.35
100%		+40	5570039.80	39.80
100%		+50	5570015.15	15.15
High	4.48	+20	5570016.05	16.05
Low	3.70	+20	5570027.12	27.12

OPERATING BAND:	UNII Band 3 & 4
OPERATING FREQUENCY:	5,815,000,000 Hz
CHANNEL:	163
REFERENCE VOLTAGE:	3.88 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	3.88	+20(Ref)	5815031.07	31.07
100%		-30	5815023.11	23.11
100%		-20	5815037.51	37.51
100%		-10	5815024.45	24.45
100%		0	5815031.33	31.33
100%		+10	5815011.92	11.92
100%		+30	5815015.76	15.76
100%		+40	5815024.84	24.84
100%		+50	5815016.42	16.42
High	4.48	+20	5815027.60	27.60
Low	3.70	+20	5815018.46	18.46

2 minutes after the EUT is energized

OPERATING BAND:	UNII Band 1 & 2A
OPERATING FREQUENCY:	5,250,000,000 Hz
CHANNEL:	50
REFERENCE VOLTAGE:	3.88 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	3.88	+20(Ref)	5250031.23	31.23
100%		-30	5250033.06	33.06
100%		-20	5250035.11	35.11
100%		-10	5250039.57	39.57
100%		0	5250012.30	12.30
100%		+10	5250017.68	17.68
100%		+30	5250018.12	18.12
100%		+40	5250018.30	18.30
100%		+50	5250035.19	35.19
High	4.48	+20	5250015.45	15.45
Low	3.70	+20	5250033.25	33.25

OPERATING BAND:	UNII Band 2C
OPERATING FREQUENCY:	5,570,000,000 Hz
CHANNEL:	114
REFERENCE VOLTAGE:	3.88 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	3.88	+20(Ref)	5570033.96	33.96
100%		-30	5570025.32	25.32
100%		-20	5570013.80	13.80
100%		-10	5570031.03	31.03
100%		0	5570033.82	33.82
100%		+10	5570010.28	10.28
100%		+30	5570021.12	21.12
100%		+40	5570017.95	17.95
100%		+50	5570021.71	21.71
High	4.48	+20	5570011.60	11.60
Low	3.70	+20	5570016.89	16.89

OPERATING BAND:	UNII Band 3 & 4
OPERATING FREQUENCY:	5,815,000,000 Hz
CHANNEL:	163
REFERENCE VOLTAGE:	3.88 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	3.88	+20(Ref)	5815035.58	35.58
100%		-30	5815030.27	30.27
100%		-20	5815033.30	33.30
100%		-10	5815019.98	19.98
100%		0	5815036.89	36.89
100%		+10	5815011.93	11.93
100%		+30	5815017.33	17.33
100%		+40	5815030.40	30.40
100%		+50	5815018.08	18.08
High	4.48	+20	5815020.28	20.28
Low	3.70	+20	5815020.16	20.16

5 minutes after the EUT is energized

OPERATING BAND:	UNII Band 1 & 2A
OPERATING FREQUENCY:	5,250,000,000 Hz
CHANNEL:	50
REFERENCE VOLTAGE:	3.88 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	3.88	+20(Ref)	5250025.26	25.26
100%		-30	5250011.77	11.77
100%		-20	5250038.56	38.56
100%		-10	5250015.73	15.73
100%		0	5250038.85	38.85
100%		+10	5250017.36	17.36
100%		+30	5250033.24	33.24
100%		+40	5250015.29	15.29
100%		+50	5250039.46	39.46
High	4.48	+20	5250012.55	12.55
Low	3.70	+20	5250037.15	37.15

OPERATING BAND:	UNII Band 2C
OPERATING FREQUENCY:	5,570,000,000 Hz
CHANNEL:	114
REFERENCE VOLTAGE:	3.88 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	3.88	+20(Ref)	5570028.67	28.67
100%		-30	5570011.96	11.96
100%		-20	5570033.66	33.66
100%		-10	5570015.36	15.36
100%		0	5570028.87	28.87
100%		+10	5570015.16	15.16
100%		+30	5570029.56	29.56
100%		+40	5570037.89	37.89
100%		+50	5570038.87	38.87
High	4.48	+20	5570017.03	17.03
Low	3.70	+20	5570015.03	15.03

OPERATING BAND:	UNII Band 3 & 4
OPERATING FREQUENCY:	5,815,000,000 Hz
CHANNEL:	163
REFERENCE VOLTAGE:	3.88 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	3.88	+20(Ref)	5815010.50	10.50
100%		-30	5815014.99	14.99
100%		-20	5815038.91	38.91
100%		-10	5815012.09	12.09
100%		0	5815018.00	18.00
100%		+10	5815032.17	32.17
100%		+30	5815012.72	12.72
100%		+40	5815014.85	14.85
100%		+50	5815022.30	22.30
High	4.48	+20	5815020.20	20.20
Low	3.70	+20	5815039.59	39.59

10 minutes after the EUT is energized

OPERATING BAND:	UNII Band 1 & 2A
OPERATING FREQUENCY:	5,250,000,000 Hz
CHANNEL:	50
REFERENCE VOLTAGE:	3.88 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	3.88	+20(Ref)	5250034.72	34.72
100%		-30	5250038.09	38.09
100%		-20	5250021.86	21.86
100%		-10	5250019.23	19.23
100%		0	5250034.72	34.72
100%		+10	5250037.29	37.29
100%		+30	5250018.49	18.49
100%		+40	5250017.55	17.55
100%		+50	5250014.13	14.13
High	4.48	+20	5250025.22	25.22
Low	3.70	+20	5250036.74	36.74

OPERATING BAND:	UNII Band 2C
OPERATING FREQUENCY:	5,570,000,000 Hz
CHANNEL:	114
REFERENCE VOLTAGE:	3.88 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	3.88	+20(Ref)	5570038.74	38.74
100%		-30	5570032.42	32.42
100%		-20	5570014.70	14.70
100%		-10	5570011.75	11.75
100%		0	5570038.66	38.66
100%		+10	5570035.06	35.06
100%		+30	5570031.41	31.41
100%		+40	5570017.54	17.54
100%		+50	5570015.15	15.15
High	4.48	+20	5570015.76	15.76
Low	3.70	+20	5570017.91	17.91

OPERATING BAND:	UNII Band 3 & 4
OPERATING FREQUENCY:	5,815,000,000 Hz
CHANNEL:	163
REFERENCE VOLTAGE:	3.88 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	3.88	+20(Ref)	5815036.25	36.25
100%		-30	5815016.42	16.42
100%		-20	5815022.97	22.97
100%		-10	5815025.32	25.32
100%		0	5815036.40	36.40
100%		+10	5815032.28	32.28
100%		+30	5815026.61	26.61
100%		+40	5815015.73	15.73
100%		+50	5815023.09	23.09
High	4.48	+20	5815019.44	19.44
Low	3.70	+20	5815017.67	17.67

10.7 STRADDLE CHANNEL

10.7.1 26 dB Bandwidth

[ANT. 1]

Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	26 dB Bandwidth [MHz]
802.11a	UNII 2C	5720	144	5709.16	15.84
802.11n(HT20)				5709.04	15.96
802.11ac(VHT20)				5709.00	16.00
802.11a	UNII 3	5720	144	5730.44	5.44
802.11n(HT20)				5730.68	5.68
802.11ac(VHT20)				5730.56	5.56

Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	26 dB Bandwidth [MHz]
802.11n(HT40)	UNII 2C	5710	142	5688.16	36.84
802.11ac(VHT40)				5688.32	36.68
802.11n(HT40)	UNII 3	5710	142	5731.12	6.12
802.11ac(VHT40)				5731.20	6.20

Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	26 dB Bandwidth [MHz]
802.11ac(VHT80)	UNII 2C	5690	138	5642.64	82.36
	UNII 3	5690	138	5735.60	10.60

Note:

[UNII 2C] 26 dB Bandwidth = 5 725 MHz - Measured Frequency[MHz]

[UNII 3C] 26 dB Bandwidth = Measured Frequency[MHz] – 5 725 MHz

[ANT. 2]

Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	26 dB Bandwidth [MHz]
802.11a	UNII 2C	5720	144	5709.16	15.84
802.11n(HT20)				5709.04	15.96
802.11ac(VHT20)				5709.08	15.92
802.11a	UNII 3	5720	144	5730.56	5.56
802.11n(HT20)				5730.56	5.56
802.11ac(VHT20)				5730.64	5.64

Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	26 dB Bandwidth [MHz]
802.11n(HT40)	UNII 2C	5710	142	5688.48	36.52
802.11ac(VHT40)				5688.48	36.52
802.11n(HT40)	UNII 3	5710	142	5731.12	6.12
802.11ac(VHT40)				5731.04	6.04

Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	26 dB Bandwidth [MHz]
802.11ac(VHT80)	UNII 2C	5690	138	5643.12	81.88
	UNII 3	5690	138	5736.08	11.08

Note:

[UNII 2C] 26 dB Bandwidth = 5 725 MHz - Measured Frequency[MHz]

[UNII 3C] 26 dB Bandwidth = Measured Frequency[MHz] – 5 725 MHz


[ANT. 1]

☐ Test Plots (26 dB Bandwidth)


802.11a UNII Band



802.11n(HT20) UNII Band

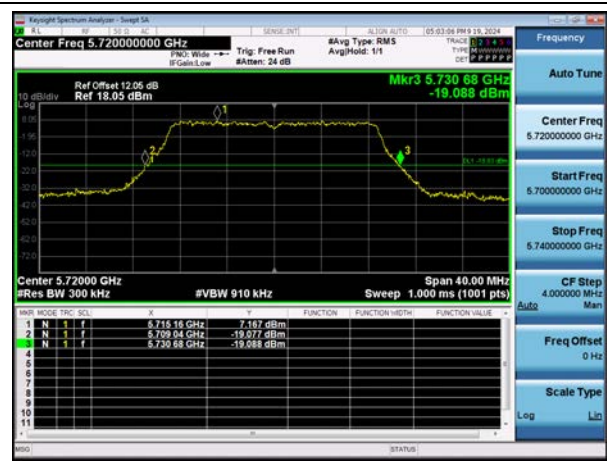


802.11ac(VHT20) UNII Band

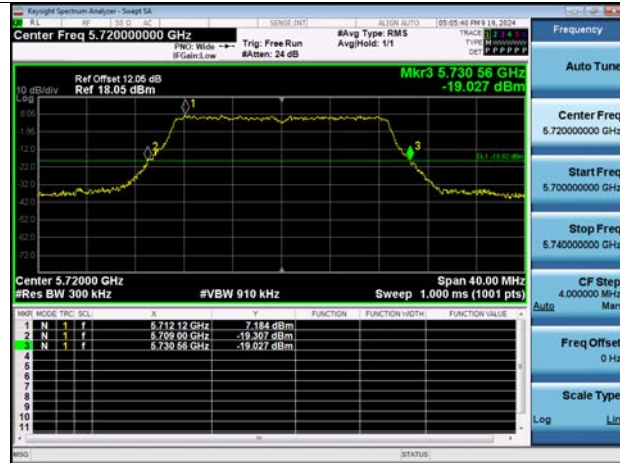


802.11n(HT40) UNII Band



802.11ac(VHT40) UNII Band

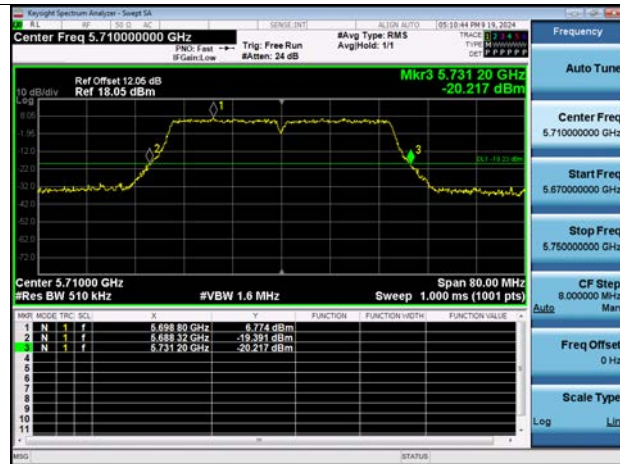


802.11ac(VHT80) UNII Band

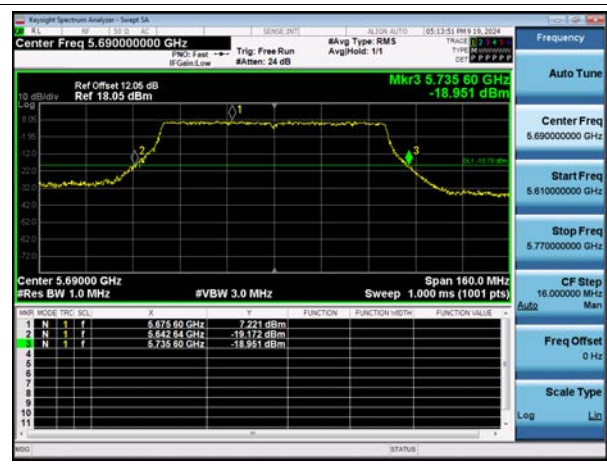

[ANT. 2]

☐ Test Plots (26 dB Bandwidth)


802.11a UNII Band

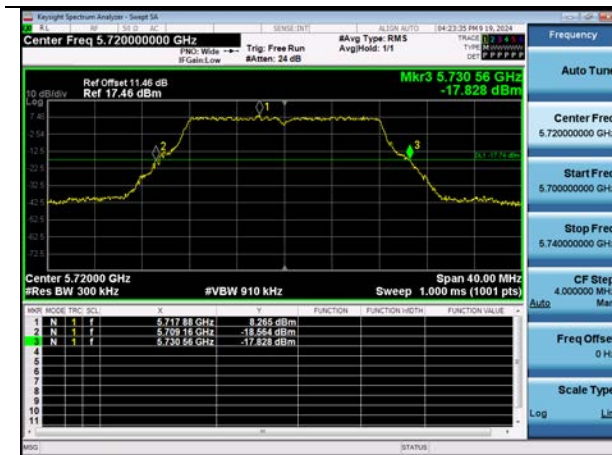


802.11n(HT20) UNII Band




802.11ac(VHT20) UNII Band

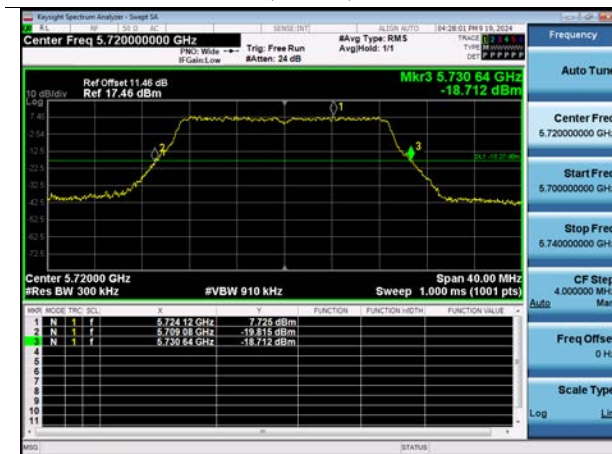


802.11n(HT40) UNII Band

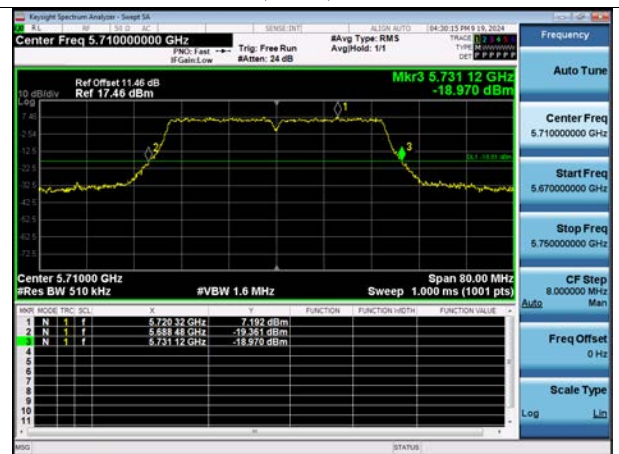

802.11ac(VHT40) UNII Band

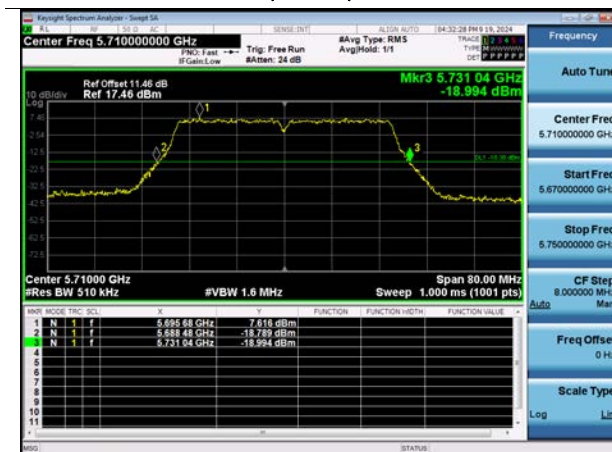

802.11ac(VHT80) UNII Band

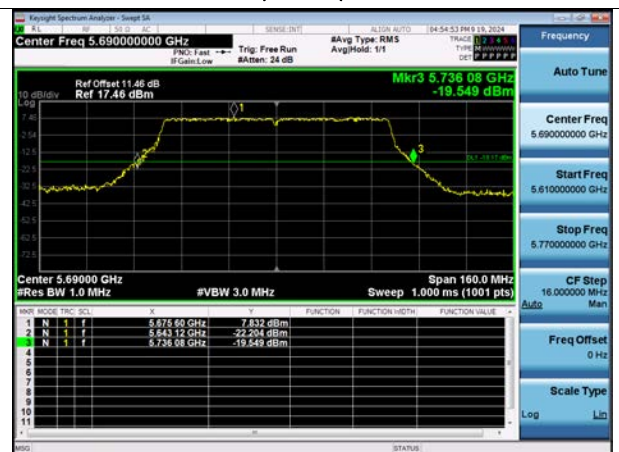

10.7.2 6 dB Bandwidth

[ANT. 1]

Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	6dB Bandwidth [MHz]	Limit [MHz]
802.11a	UNII3	5720	144	5728.20	3.20	> 0.5
802.11n(HT20)				5728.80	3.80	> 0.5
802.11ac(VHT20)				5728.80	3.80	> 0.5
802.11n(HT40)	UNII3	5710	142	5728.24	3.24	> 0.5
802.11ac(VHT40)				5728.24	3.24	> 0.5
802.11ac(VHT80)	UNII3	5690	138	5728.24	3.24	> 0.5

[ANT. 2]

Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	6dB Bandwidth [MHz]	Limit [MHz]
802.11a	UNII3	5720	144	5728.20	3.20	> 0.5
802.11n(HT20)				5728.80	3.80	> 0.5
802.11ac(VHT20)				5728.80	3.80	> 0.5
802.11n(HT40)	UNII3	5710	142	5728.24	3.24	> 0.5
802.11ac(VHT40)				5728.24	3.24	> 0.5
802.11ac(VHT80)	UNII3	5690	138	5728.24	3.24	> 0.5


Note:

6 dB Bandwidth = Measured Frequency[MHz] – 5 725MHz


[ANT. 1]

☐ Test Plots(UNII 3 Band 6 dB Bandwidth)


802.11a UNII Band

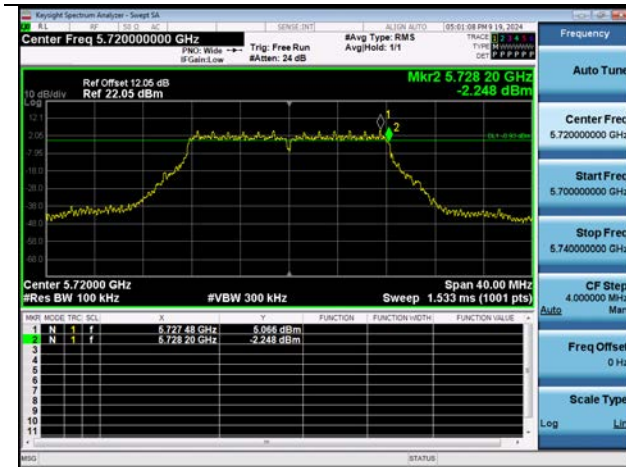


802.11n(HT20) UNII Band

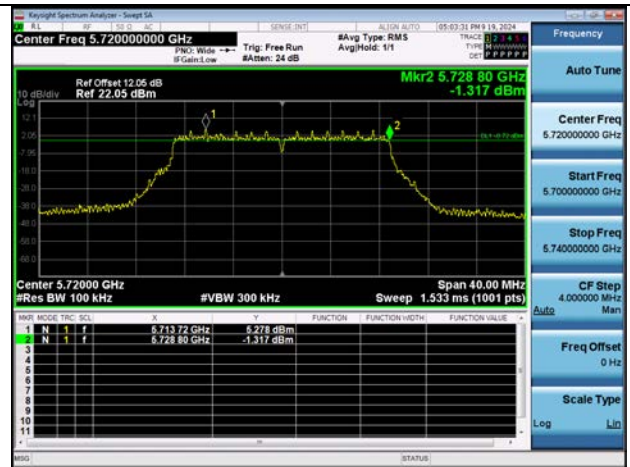


802.11ac(VHT20) UNII Band

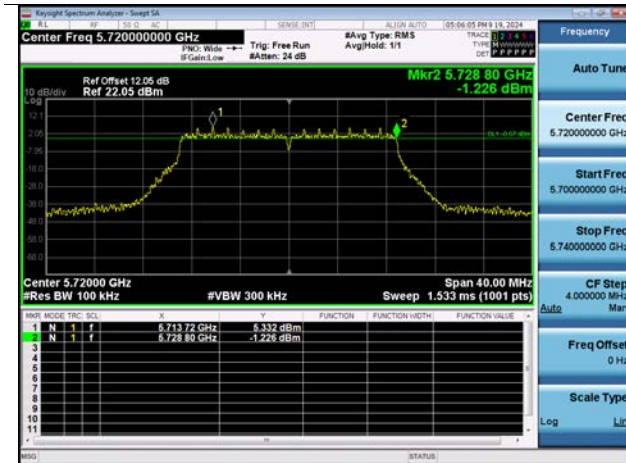


802.11n(HT40) UNII Band

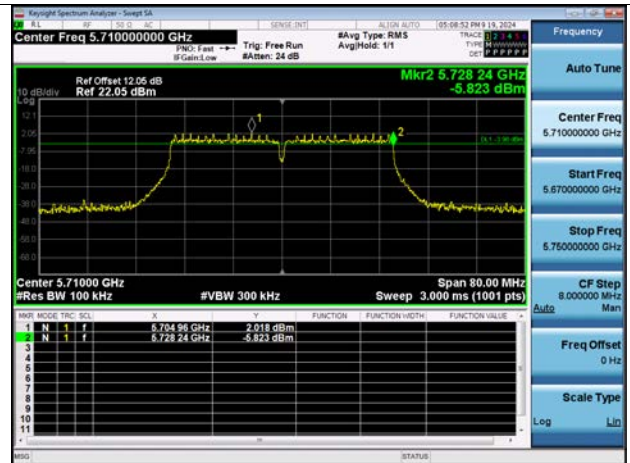

802.11ac(VHT40) UNII Band

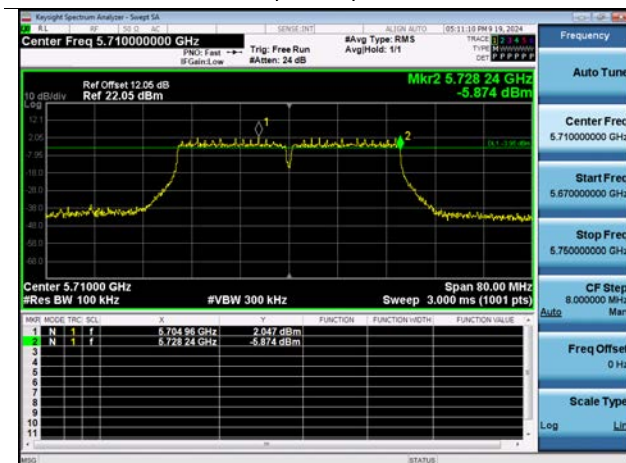


802.11ac(VHT80) UNII Band

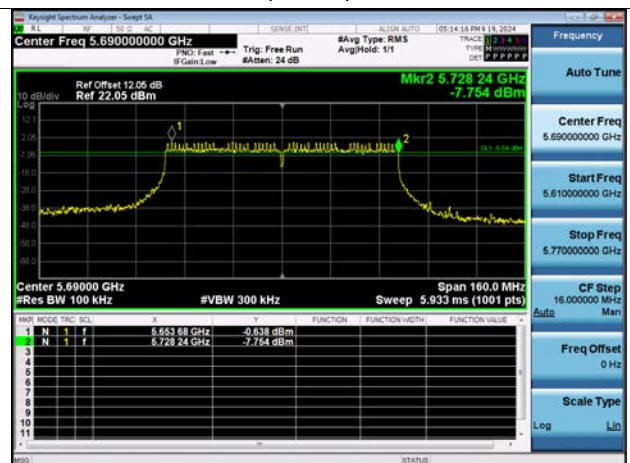


■ Test Plots(UNII 3 Band 6 dB Bandwidth)


802.11n(HT20) UNII Band

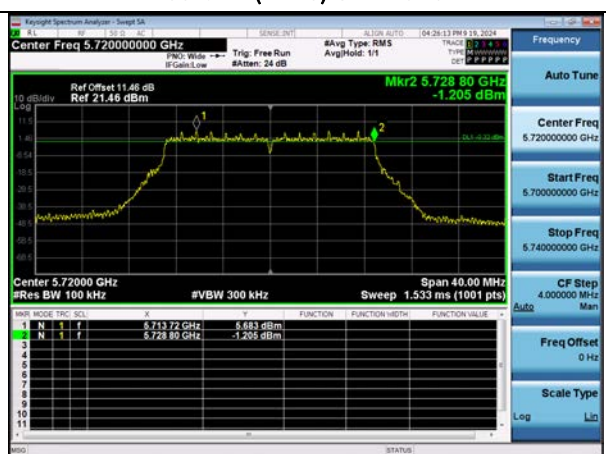

802.11n(HT40) UNII Band

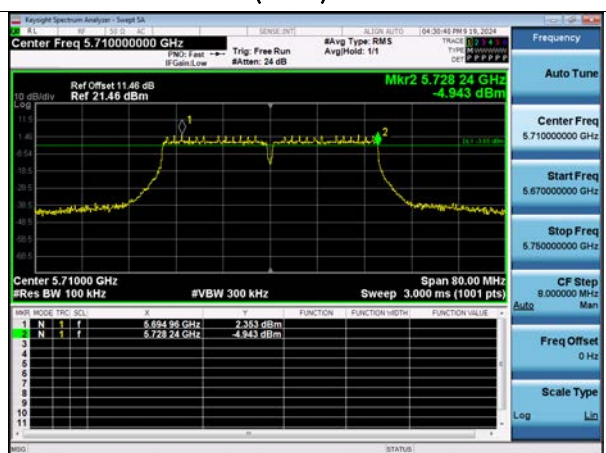

802.11ac(VHT80) UNII Band

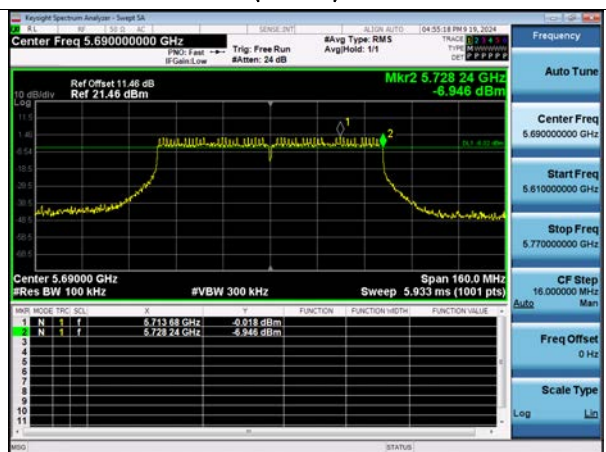

10.7.3 Output Power

[ANT. 1]

Mode	Frequency [MHz]	Channel	Measured Power [dBm]	Duty Cycle Factor [dB]	Total Power [dBm]	Limit [dBm]	Worstcase Datarate
802.11a	5720	144	15.05	0.287	15.33	23.00	6 Mbps
802.11n(HT20)	(UNII 2C Band)		14.94	0.334	15.27	23.03	MCS0
802.11ac(VHT20)			15.01	0.334	15.35	23.04	MCS0
802.11a	5720	144	9.04	0.287	9.33	30.00	6 Mbps
802.11n(HT20)	(UNII 3 Band)		9.46	0.334	9.80	30.00	MCS0
802.11ac(VHT20)			9.59	0.334	9.92	30.00	MCS0

Mode	Frequency [MHz]	Channel	Measured Power [dBm]	Duty Cycle Factor [dB]	Total Power [dBm]	Limit [dBm]	Worstcase Datarate
802.11n(HT40)	5710	142	15.56	0.646	16.21	23.98	MCS0
802.11ac(VHT40)	(UNII 2C Band)		13.23	3.043	16.27	23.98	MCS0
802.11n(HT40)	5710	142	5.44	0.646	6.09	30.00	MCS0
802.11ac(VHT40)	(UNII 3 Band)		3.34	3.043	6.38	30.00	MCS0

Mode	Frequency [MHz]	Channel	Measured Power [dBm]	Duty Cycle Factor [dB]	Total Power [dBm]	Limit [dBm]	Worstcase Datarate
802.11ac(VHT80)	5690 (UNII 2C Band)	138	14.95	1.189	16.14	23.98	MCS0
	5690 (UNII 3 Band)	138	1.51	1.189	2.70	30.00	MCS0

[ANT. 2]

Mode	Frequency [MHz]	Channel	Measured Power [dBm]	Duty Cycle Factor [dB]	Total Power [dBm]	Limit [dBm]	Worstcase Datarate
802.11a	5720	144	15.31	0.287	15.59	23.00	6 Mbps
802.11n(HT20)	(UNII 2C		15.40	0.334	15.74	23.03	MCS0
802.11ac(VHT20)	Band)		15.41	0.334	15.75	23.02	MCS0
802.11a	5720	144	9.48	0.287	9.77	30.00	6 Mbps
802.11n(HT20)	(UNII 3		10.01	0.334	10.34	30.00	MCS0
802.11ac(VHT20)	Band)		10.02	0.334	10.35	30.00	MCS0


Mode	Frequency [MHz]	Channel	Measured Power [dBm]	Duty Cycle Factor [dB]	Total Power [dBm]	Limit [dBm]	Worstcase Datarate
802.11n(HT40)	5710	142	15.98	0.646	16.63	23.98	MCS0
802.11ac(VHT40)	(UNII 2C Band)		13.68	3.043	16.72	23.98	MCS0
802.11n(HT40)	5710	142	6.01	0.646	6.66	30.00	MCS0
802.11ac(VHT40)	(UNII 3 Band)		3.85	3.043	6.89	30.00	MCS0

Mode	Frequency [MHz]	Channel	Measured Power [dBm]	Duty Cycle Factor [dB]	Total Power [dBm]	Limit [dBm]	Worstcase Datarate
802.11ac(VHT80)	5690	138	15.65	1.189	16.83	23.98	MCS0
	(UNII 2C Band)						
	5690	138	2.52	1.189	3.71	30.00	MCS0
	(UNII 3 Band)						


[ANT. 1]

▣ Test Plots


802.11a UNII 2C Band

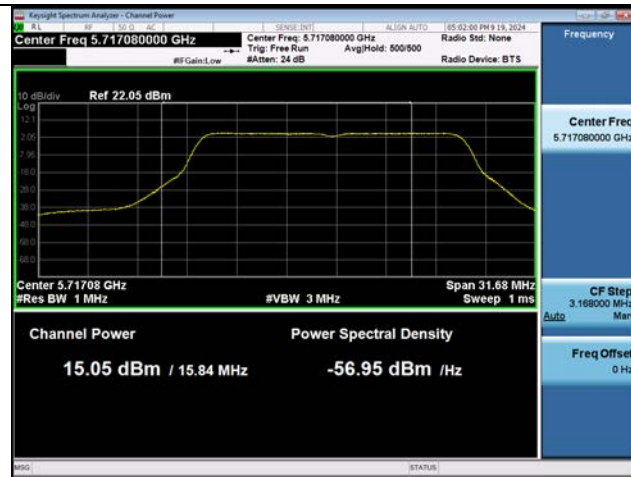


802.11a UNII 3 Band

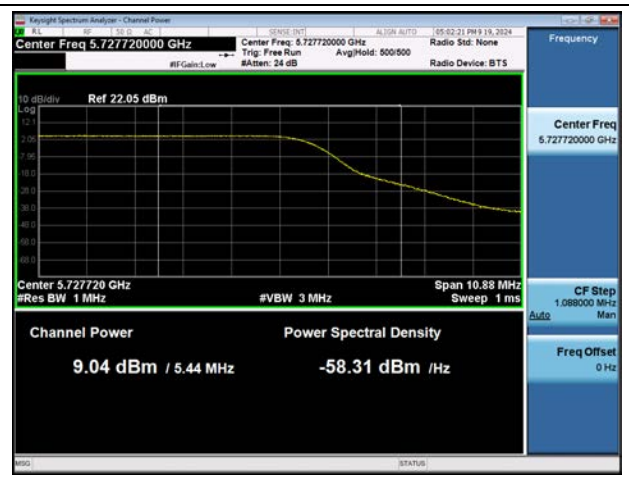


802.11n(HT20) UNII 2C Band

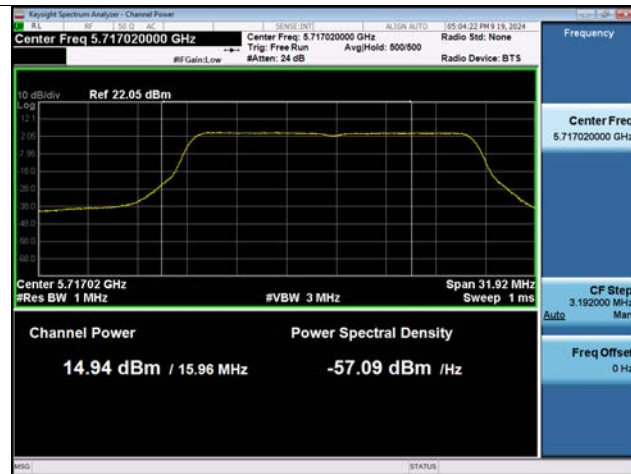


802.11n(HT20) UNII 3 Band

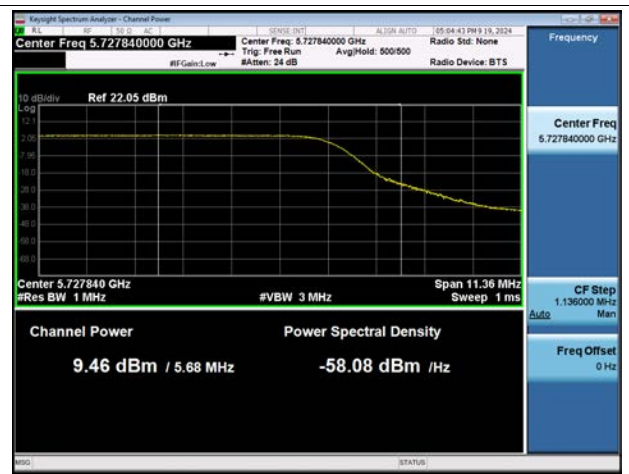


802.11ac(VHT20) UNII 2C Band

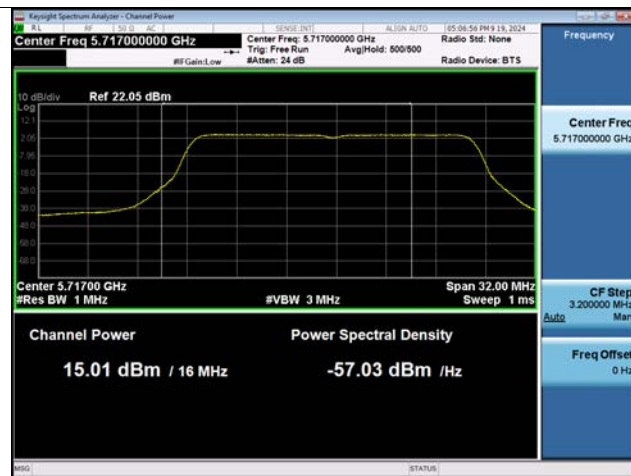

802.11ac(VHT20) UNII 3 Band

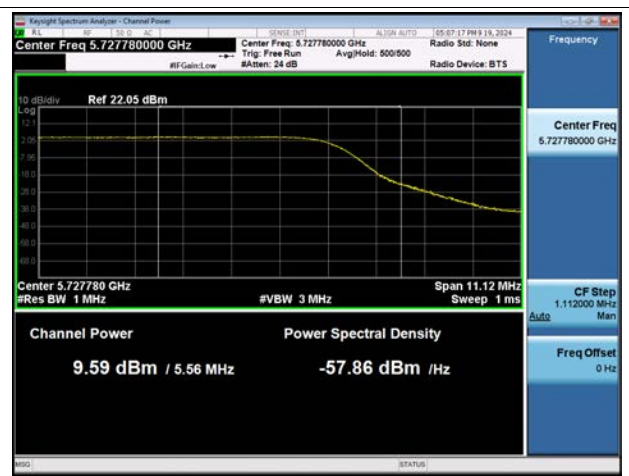


802.11n(HT40) UNII 2C Band

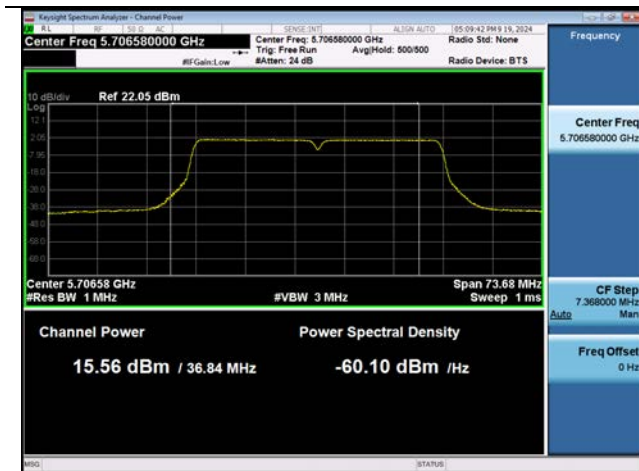


802.11n(HT40) UNII 3 Band




802.11ac(VHT40) UNII 2C Band

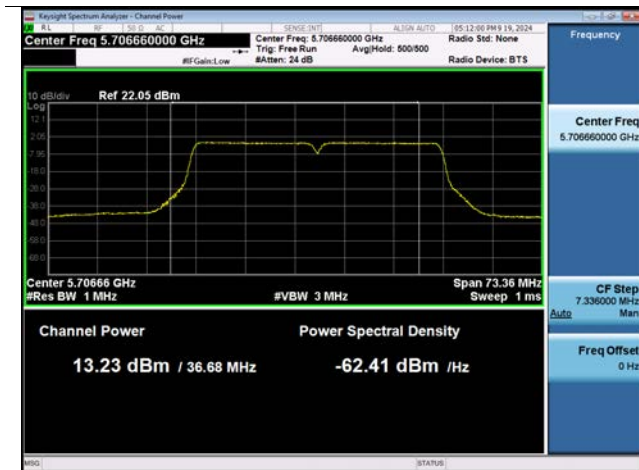


802.11ac(VHT40) UNII 3 Band

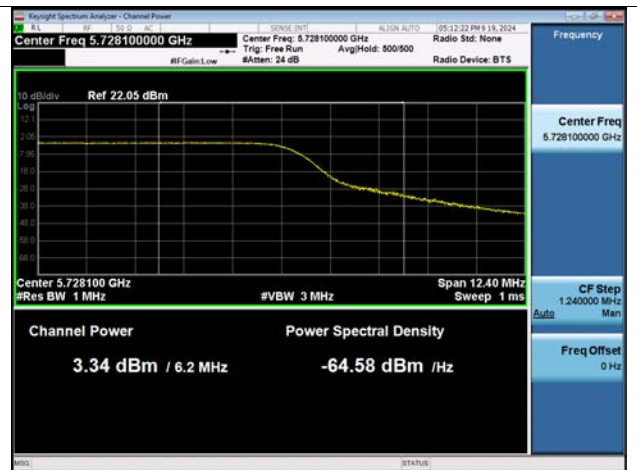

802.11ac(VHT80) UNII 2C Band

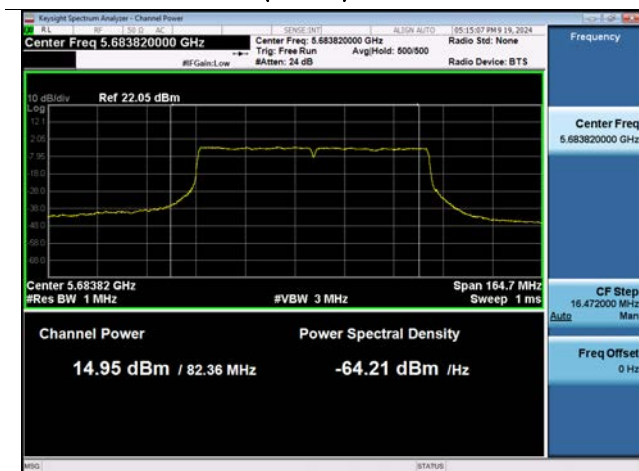


802.11ac(VHT80) UNII 3 Band

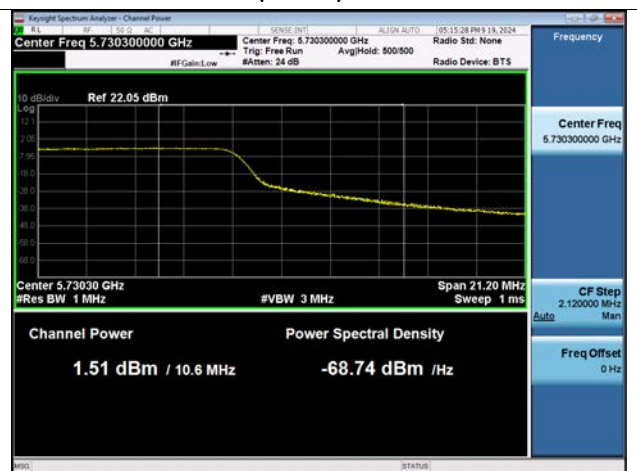


[ANT. 2]

Test Plots


802.11a UNII 2C Band

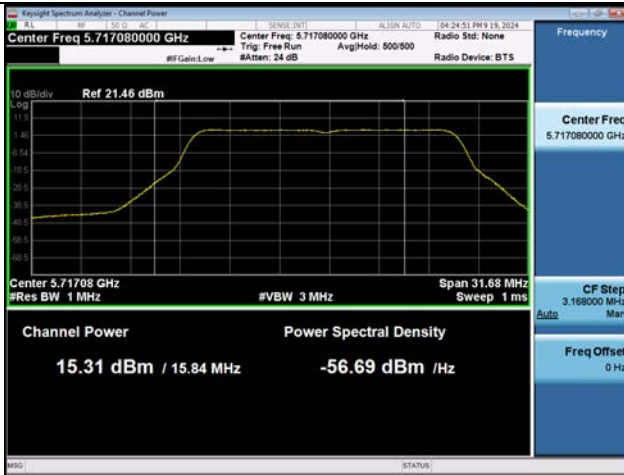


802.11a UNII 3 Band

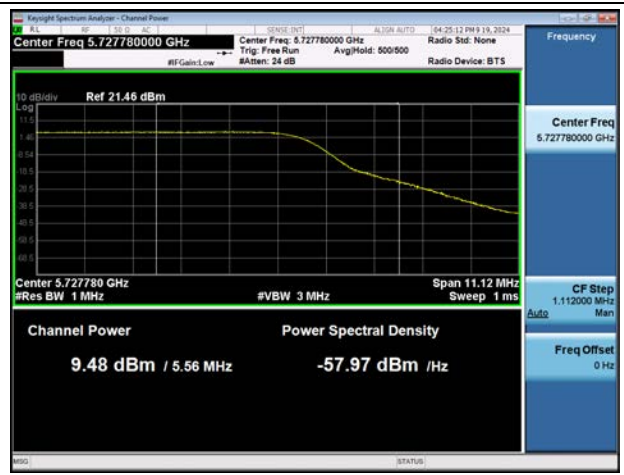


802.11n(HT20) UNII 2C Band

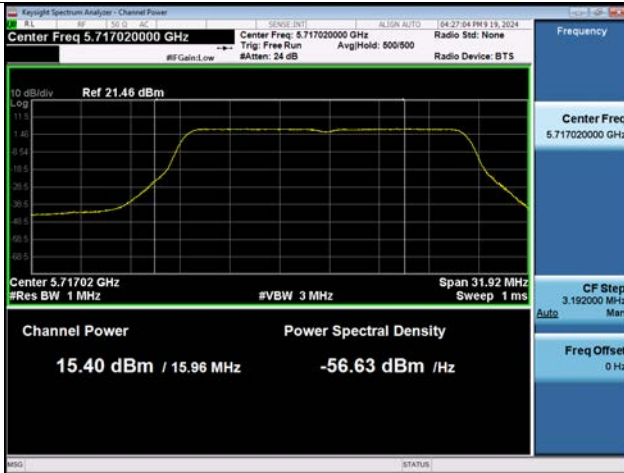


802.11n(HT20) UNII 3 Band

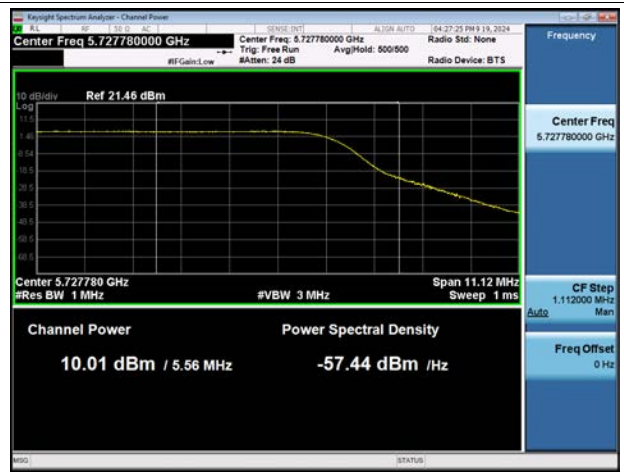

802.11ac(VHT20) UNII 2C Band

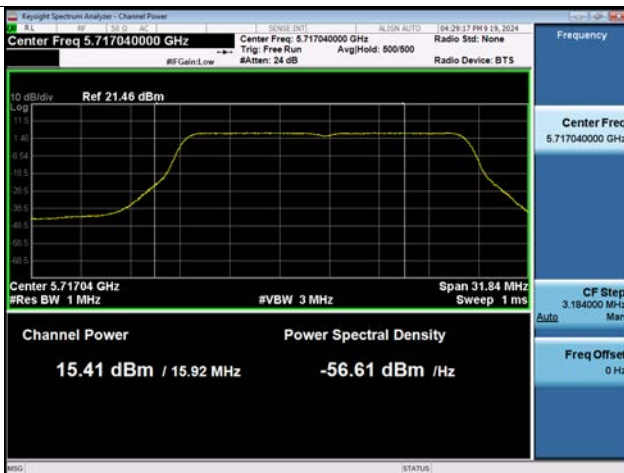

802.11ac(VHT20) UNII 3 Band

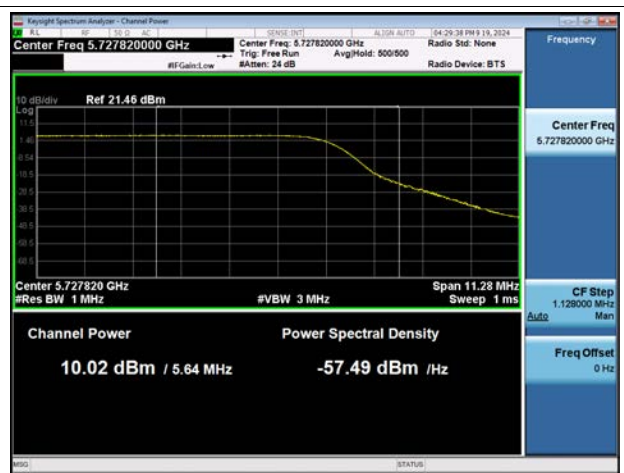


802.11n(HT40) UNII 2C Band




802.11n(HT40) UNII 3 Band




802.11ac(VHT40) UNII 2C Band

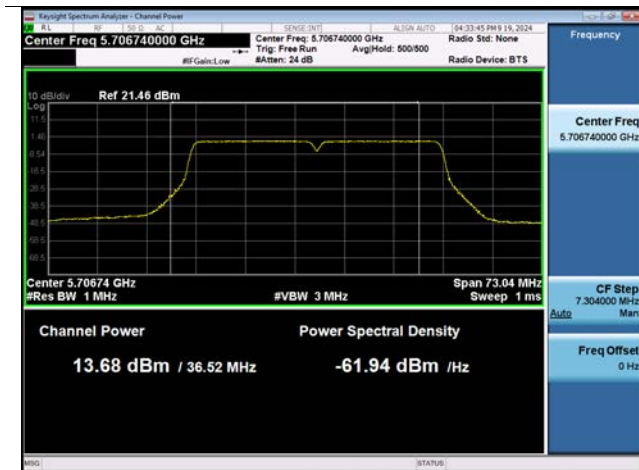


802.11ac(VHT40) UNII 3 Band

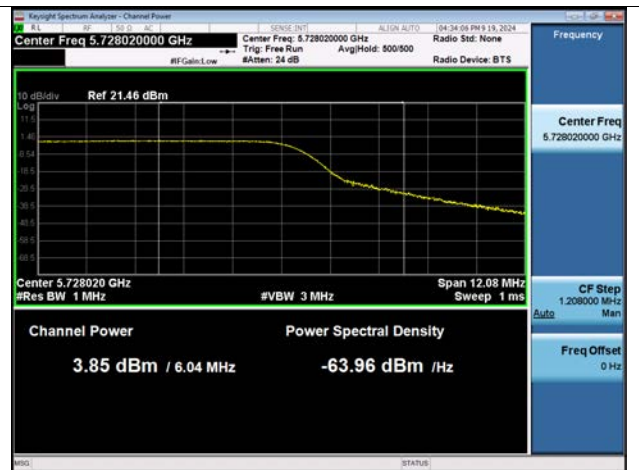

802.11ac(VHT80) UNII 2C Band

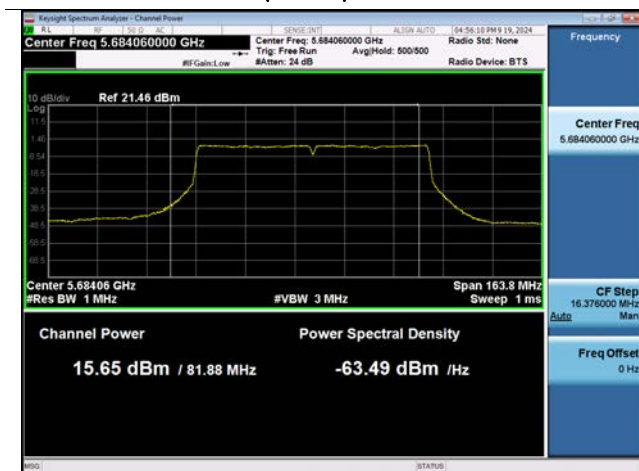

802.11ac(VHT80) UNII 3 Band

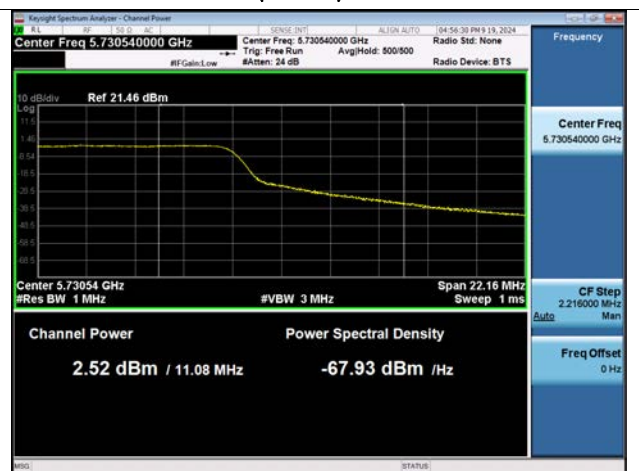

10.7.4 Power Spectral Density

[ANT. 1]

Mode	Frequency [MHz]	Channel	Measured Density [dBm]	Duty Cycle Factor [dB]	Total PSD [dBm]	Limit [dBm]	Worstcase Datarate
802.11a	5720	144	4.776	0.287	5.063	11	6 Mbps
802.11n(HT20)	(UNII 2C Band)		4.287	0.334	4.622	dBm/	MCS0
802.11ac(VHT20)			4.336	0.334	4.670	MHz	MCS0
802.11a	5720	144	1.744	0.287	2.031	30	6 Mbps
802.11n(HT20)	(UNII 3 Band)		1.438	0.334	1.772	dBm/	MCS0
802.11ac(VHT20)			1.473	0.334	1.807	500 kHz	MCS0

Mode	Frequency [MHz]	Channel	Measured Density [dBm]	Duty Cycle Factor [dB]	Total PSD [dBm]	Limit [dBm]	Worstcase Datarate
802.11n(HT40)	5710	142	1.465	0.646	2.111	11 dBm/ MHz	MCS0
802.11ac(VHT40)	(UNII 2C Band)		-0.616	3.043	2.427		MCS0
802.11n(HT40)	5710	142	-2.049	0.646	-1.403	30 dBm/ 500 kHz	MCS0
802.11ac(VHT40)	(UNII 3 Band)		-4.106	3.043	-1.063		MCS0

Mode	Frequency [MHz]	Channel	Measured Density [dBm]	Duty Cycle Factor [dB]	Total PSD [dBm]	Limit [dBm]	Worstcase Datarate
802.11ac(VHT80)	5690 (UNII 2C Band)	138	-2.302	1.189	-1.112	11 dBm/ MHz	MCS0
	5690 (UNII 3 Band)	138	-5.722	1.189	-4.532	30 dBm/ 500 kHz	MCS0

[ANT. 2]

Mode	Frequency [MHz]	Channel	Measured Density [dBm]	Duty Cycle Factor [dB]	Total PSD [dBm]	Limit [dBm]	Worstcase Datarate
802.11a	5720	144	5.010	0.287	5.297	11 dBm/ MHz	6 Mbps
802.11n(HT20)	(UNII 2C		4.915	0.334	5.249		MCS0
802.11ac(VHT20)	Band)		4.804	0.334	5.137		MCS0
802.11a	5720	144	2.116	0.287	2.402	30 dBm /500 kH z	6 Mbps
802.11n(HT20)	(UNII 3		2.013	0.334	2.347		MCS0
802.11ac(VHT20)	Band)		1.943	0.334	2.276		MCS0

Mode	Frequency [MHz]	Channel	Measured Density [dBm]	Duty Cycle Factor [dB]	Total PSD [dBm]	Limit [dBm]	Worstcase Datarate
802.11n(HT40)	5710	142	1.708	0.646	2.353	11 dBm/ MHz	MCS0
802.11ac(VHT40)	(UNII 2C Band)		-0.269	3.043	2.774		MCS0
802.11n(HT40)	5710	142	-1.377	0.646	-0.732	30 dBm/ 500 kHz	MCS0
802.11ac(VHT40)	(UNII 3 Band)		-3.826	3.043	-0.783		MCS0

Mode	Frequency [MHz]	Channel	Measured Density [dBm]	Duty Cycle Factor [dB]	Total PSD [dBm]	Limit [dBm]	Worstcase Datarate
802.11ac(VHT80)	5690	138	-1.800	1.189	-0.610	11 dBm/ MHz	MCS0
	5690	138	-4.661	1.189	-3.472	30 dBm /500 kH z	MCS0

[ANT. 1]

Test Plots

802.11a UNII 2C Band




802.11a UNII 3 Band



802.11n(HT20) UNII 2C Band



802.11n(HT20) UNII 3 Band

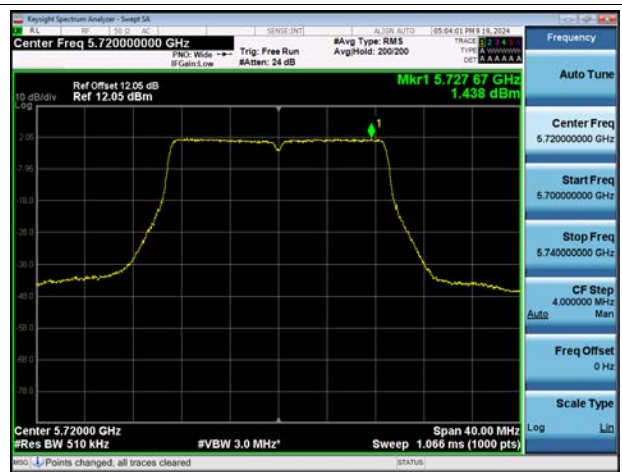

802.11ac(VHT20) UNII 2C Band



802.11ac(VHT20) UNII 3 Band



802.11n(HT40) UNII 2C Band



802.11n(HT40) UNII 3 Band



802.11ac(VHT40) UNII 2C Band



802.11ac(VHT40) UNII 3 Band



802.11ac(VHT80) UNII 2C Band



802.11ac(VHT80) UNII 3 Band

