

TEST REPORT

FCC Sub6 n71 Test for SM-S931U
Certification

APPLICANT
SAMSUNG Electronics Co., Ltd.

REPORT NO.
HCT-RF-2410-FC039

DATE OF ISSUE
October 24, 2024

Tested by
Jin Woo Yu

유준우

Technical Manager
Jong Seok Lee

이정석

HCT CO., LTD.
Bongjai Huh
BongJai Huh / CEO

**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Tel. +82 31 645 6300 Fax. +82 31 645 6401

TEST REPORT

REPORT NO.

HCT-RF-2410-FC039

DATE OF ISSUE

October 24, 2024

Additional Model

SM-S931U1

Applicant

SAMSUNG Electronics Co., Ltd.

129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Product Name

Mobile Phone

Model Name

SM-S931U

Date of Test

August 26, 2024 ~ October 23, 2024

FCC ID

A3LSMS931U

Location of Test

☒ Permanent Testing Lab ☐ On Site Testing

(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

Test Standard Used

FCC Rule Part: § 27

Test Results

PASS

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	October 24, 2024	Initial Release

Notice

Content

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C. 853(a)

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked *.

Information provided by the applicant is marked **.

Test results provided by external providers are marked ***.

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

CONTENTS

1. GENERAL INFORMATION	6
1.1. MAXIMUM OUTPUT POWER	7
2. INTRODUCTION	9
2.1. DESCRIPTION OF EUT	9
2.2. MEASURING INSTRUMENT CALIBRATION	9
2.3. TEST FACILITY	9
3. DESCRIPTION OF TESTS	10
3.1 TEST PROCEDURE	10
3.2 RADIATED POWER	11
3.3 RADIATED SPURIOUS EMISSIONS	12
3.4 PEAK- TO- AVERAGE RATIO	13
3.5 OCCUPIED BANDWIDTH.	15
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	16
3.7 BAND EDGE	17
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	19
3.9 WORST CASE(RADIATED TEST)	20
3.10 WORST CASE(CONDUCTED TEST)	21
4. LIST OF TEST EQUIPMENT	22
5. MEASUREMENT UNCERTAINTY	23
6. SUMMARY OF TEST RESULTS	24
7. SAMPLE CALCULATION	25
8. TEST DATA(Main 1 ANT)	27
8.1 EFFECTIVE RADIATED POWER	27
8.2 RADIATED SPURIOUS EMISSIONS	31
8.3 PEAK-TO-AVERAGE RATIO	32
8.4 OCCUPIED BANDWIDTH	33
8.5 CONDUCTED SPURIOUS EMISSIONS	34
8.6 BAND EDGE	34
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	35
9. TEST DATA(Sub 1 ANT)	39
9.1 EFFECTIVE RADIATED POWER	39
9.2 RADIATED SPURIOUS EMISSIONS	43
9.3 PEAK-TO-AVERAGE RATIO	44
9.4 OCCUPIED BANDWIDTH	45
9.5 CONDUCTED SPURIOUS EMISSIONS	46
9.6 BAND EDGE	46

9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	47
10. TEST PLOTS(Main 1 ANT)	51
11. TEST PLOTS(Sub 1 ANT)	136
12. ANNEX A_ TEST SETUP PHOTO	221

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMS931U
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§ 27
EUT Type:	Mobile phone
Model(s):	SM-S931U
Additional Model(s)	SM-S931U1
SCS(kHz):	15
Bandwidth(MHz):	5, 10, 15, 20
Waveform:	CP-OFDM, DFT-S-OFDM
Modulation:	DFT-S-OFDM: PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM CP-OFDM: QPSK, 16QAM, 64QAM, 256QAM
Tx Frequency:	665.5 MHz – 695.5 MHz (Sub6 n71(5 MHz)) 668.0 MHz – 693.0 MHz (Sub6 n71(10 MHz)) 670.5 MHz – 690.5 MHz (Sub6 n71(15 MHz)) 673.0 MHz – 688.0 MHz (Sub6 n71(20 MHz))
Date(s) of Tests:	August 26, 2024 ~ October 23, 2024
Serial number:	Radiated : R3CX80BGBQR Conducted : R3CX70H9JQN

1.1. MAXIMUM OUTPUT POWER

Main 1 ANT

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
Sub6 n71 (5)	665.5 - 695.5	4M57G7D	PI/2 BPSK	0.037	15.74
		4M58G7D	QPSK	0.037	15.72
		4M55W7D	16QAM	0.029	14.65
		4M60W7D	64QAM	0.022	13.39
		4M56W7D	256QAM	0.012	10.71
Sub6 n71 (10)	668.0 - 693.0	8M95G7D	PI/2 BPSK	0.040	16.02
		9M00G7D	QPSK	0.040	15.99
		8M96W7D	16QAM	0.030	14.72
		8M96W7D	64QAM	0.022	13.42
		9M00W7D	256QAM	0.012	10.83
Sub6 n71 (15)	670.5 - 690.5	13M5G7D	PI/2 BPSK	0.041	16.13
		13M5G7D	QPSK	0.041	16.10
		13M5W7D	16QAM	0.031	14.97
		13M5W7D	64QAM	0.023	13.60
		13M4W7D	256QAM	0.012	10.89
Sub6 n71 (20)	673.0 - 688.0	17M9G7D	PI/2 BPSK	0.040	16.04
		17M9G7D	QPSK	0.040	16.01
		17M9W7D	16QAM	0.030	14.82
		17M9W7D	64QAM	0.022	13.47
		17M9W7D	256QAM	0.012	10.78

Sub 1 ANT

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
Sub6 n71 (5)	665.5 - 695.5	4M49G7D	PI/2 BPSK	0.068	18.33
		4M52G7D	QPSK	0.067	18.29
		4M48W7D	16QAM	0.053	17.23
		4M51W7D	64QAM	0.039	15.91
		4M52W7D	256QAM	0.021	13.28
Sub6 n71 (10)	668.0 - 693.0	8M96G7D	PI/2 BPSK	0.070	18.47
		9M01G7D	QPSK	0.069	18.37
		9M01W7D	16QAM	0.053	17.27
		8M95W7D	64QAM	0.039	15.94
		8M99W7D	256QAM	0.021	13.29
Sub6 n71 (15)	670.5 - 690.5	13M5G7D	PI/2 BPSK	0.075	18.75
		13M5G7D	QPSK	0.074	18.69
		13M5W7D	16QAM	0.058	17.62
		13M5W7D	64QAM	0.042	16.21
		13M5W7D	256QAM	0.023	13.70
Sub6 n71 (20)	673.0 - 688.0	18M0G7D	PI/2 BPSK	0.071	18.53
		18M0G7D	QPSK	0.070	18.46
		17M9W7D	16QAM	0.053	17.27
		17M9W7D	64QAM	0.039	15.95
		18M0W7D	256QAM	0.021	13.30

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub 6, mmWave. It also supports IEEE 802.11 a/b/g/n/ac/ax/be (20/40/80/160/320 MHz), Bluetooth(iPA, ePA), BT LE(iPA, ePA), NFC, WPT, WIFI 6E.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW $\geq$ 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_g_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

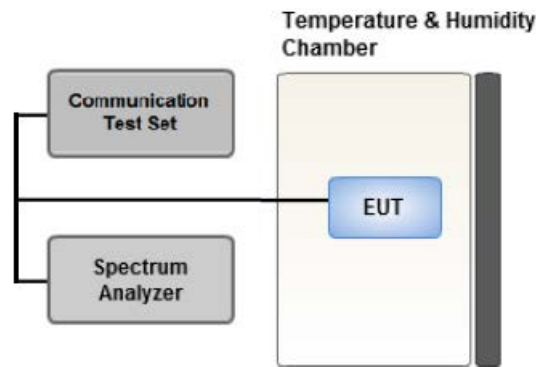

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .
 Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW $\geq$ OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) $\times$ (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW $\geq$ OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

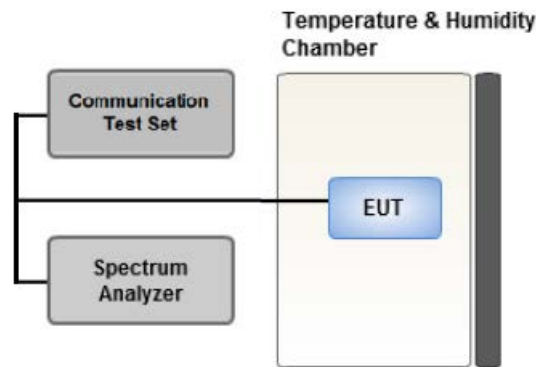

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW $\geq$ 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

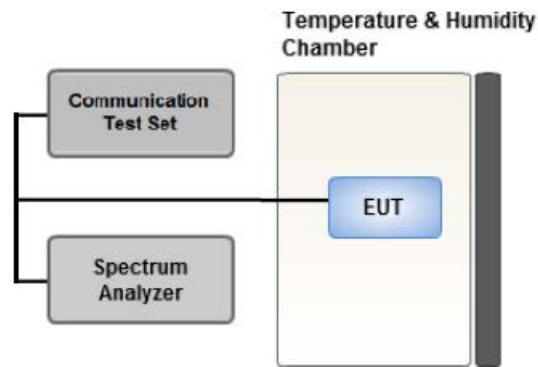

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep $\geq$ 2 x Span / RBW

3.7 BAND EDGE

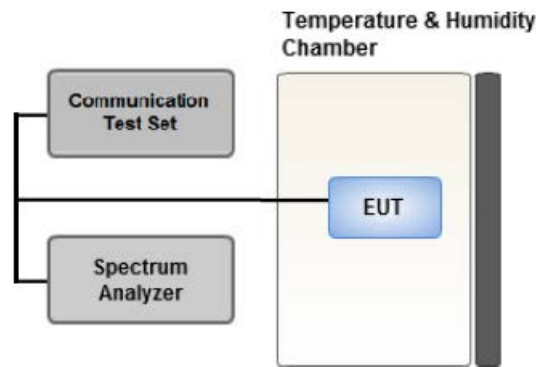

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes


According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels (low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where $\text{Margin} < 1$ dB the emission level is either corrected by $10 \log(1 \text{ MHz} / \text{RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

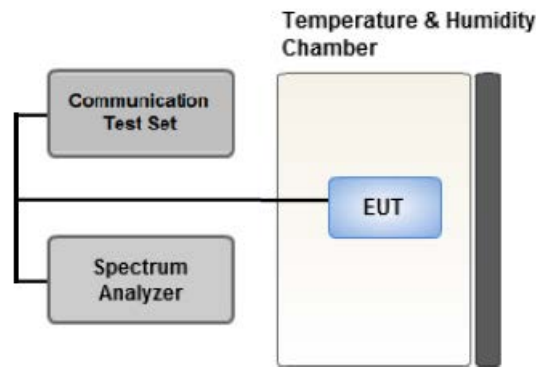

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- .- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- .- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter.
Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- Waveform : All Waveform of operation were investigated and the worst case configuration results are reported.
(Worst case: DFT-S-OFDM)
- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
Mode: SA,NSA
Worst case: SA
Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)
Worst case : Stand alone
- All simultaneous transmission scenarios of operation were investigated, and the test results showed no additional significant emissions relative to the least restrictive limit were observed.
Therefore, only the worst case(stand-alone) results were reported.
- Radiated Spurious emissions are measured while operating in EN-DC mode with Sub 6 NR carrier as well as an LTE carrier (anchor).
All EN-DC mode of operation (=anchor) were investigated and the test results were measured No Peak Found.
The test results which are attenuated more than 20 dB below the permissible value, so it was not reported.
- All RB sizes, offsets of operation were investigated and the worst case configuration results are reported.
Please refer to the table below.
- In the case of radiated spurious emissions, all bandwidth of operation was investigated and the worst case bandwidth results are reported. (Worst case : 15 MHz)
- SM-S931U & additional models were tested and the worst case results are reported.
(Worst case : SM-S931U)

[Main 1 ANT Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	See Section 8.1		X
Radiated Spurious and Harmonic Emissions	PI/2 BPSK	See Section 8.2		X

[Sub 1 ANT Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	See Section 9.1		X
Radiated Spurious and Harmonic Emissions	PI/2 BPSK	See Section 9.2		X

3.10 WORST CASE(CONDUCTED TEST)

- Waveform : All Waveform of operation were investigated and the worst case configuration results are reported.
(Worst case: DFT-S-OFDM)
- Modulation : All Modulation of operation were investigated and the worst case configuration results are reported.
(Worst case: PI/2 BPSK)
- All modes of operation were investigated and the worst case configuration results are reported.
Mode: SA,NSA
Worst case: SA
- All RB sizes, offsets of operation were investigated and the worst case configuration results are reported. Please refer to the table below.
- SM-S931U & additional models were tested and the worst case results are reported.
(Worst case : SM-S931U)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth Peak- to- Average Ratio	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	5,10,15,20	Mid	Full RB	0
Band Edge	PI/2 BPSK	5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	51
		15	Low	1	0
			High	1	78
		20	Low	1	0
			High	1	105
		5,10,15,20	Low, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	PI/2 BPSK	5,10,15,20	Low, Mid, High	1	1

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacture	Serial No.	Due to Calibration	Calibration Interval
Precision Dipole Antenna	UHAP	Schwarzbeck	01273	03/10/2026	Biennial
Precision Dipole Antenna	UHAP	Schwarzbeck	01274	03/10/2026	Biennial
Horn Antenna(1~18 GHz)	BBHA 9120D	Schwarzbeck	02289	02/14/2026	Biennial
Horn Antenna(1~18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1299	04/27/2025	Biennial
Horn Antenna(15~40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/20/2026	Biennial
Horn Antenna(15~40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Loop Antenna(9 kHz~30 MHz)	FMZB1513	Rohde & Schwarz	1513-175	01/16/2025	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/09/2025	Biennial
Hybrid Antenna	VULB9160	Schwarzbeck	760	02/24/2025	Biennial
RF Switching System	FBSR-06B (1G HPF + LNA)	T&M SYSTEM	F3L1	05/14/2025	Annual
RF Switching System	FBSR-06B (3G HPF + LNA)	T&M SYSTEM	F3L2	05/14/2025	Annual
RF Switching System	FBSR-06B (6G HPF + LNA)	T&M SYSTEM	F3L3	05/14/2025	Annual
RF Switching System	FBSR-06B (LNA)	T&M SYSTEM	F3L4	05/14/2025	Annual
Power Amplifier	CBL18265035	CERNEX	22966	11/17/2024	Annual
Power Amplifier	CBL26405040	CERNEX	25956	02/26/2025	Annual
DC Power Supply	E3632A	Hewlett Packard	MY40004427	08/22/2025	Annual
Power Splitter(DC~26.5 GHz)	11667B	Hewlett Packard	11275	02/29/2025	Annual
Chamber	SU-642	ESPEC	93008124	02/19/2025	Annual
Signal Analyzer(10 Hz~26.5 GHz)	N9020A	Agilent	MY51110063	04/04/2025	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/17/2025	Annual
Spectrum Analyzer(10 Hz~40 GHz)	FSV40	REOHDE & SCHWARZ	101436	02/13/2025	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/05/2025	Annual
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262287701	05/16/2025	Annual
Wideband Radio Communication Tester	MT8000A	Anritsu Corp.	6262302511	05/14/2025	Annual
Signal Analyzer(5 Hz~40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/17/2025	Annual
4-Way Divider	ZC4PD-K1844+	Mini-Circuits	942907	09/10/2025	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.98 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.52 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.66 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition: Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 27.53(g)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§ 2.1046	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§ 2.1055, § 27.54	Emission must remain in band	PASS

Note:

1. See SAR Report
2. Conducted tests were tested using 5G Wireless Tester.

6.2 Test Condition: Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§ 27.50(c)(10)	< 3 Watts max. ERP	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 27.53(g)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

Note:

1. Radiated tests were tested using 5G Wireless Tester.

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW
GSM BW = 249 kHz
G = Phase Modulation
X = Cases not otherwise covered
W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W
GSM BW = 249 kHz
G = Phase Modulation
7 = Quantized/Digital Info
W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W
WCDMA BW = 4.17 MHz
F = Frequency Modulation
9 = Composite Digital Info
W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D
LTE BW = 4.48 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D
LTE BW = 4.48 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

8. TEST DATA(Main 1 ANT)

8.1 EFFECTIVE RADIATED POWER

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured	Substitute	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
665.5	Sub6 n71/ 5 MHz [15 kHz]	PI/2 BPSK	-32.96	25.58	-9.60	1.24	H	< 3.00	0.030	14.74	1	1
		QPSK	-33.83	24.71	-9.60	1.24	H		0.024	13.87		
		16-QAM	-34.74	23.80	-9.60	1.24	H		0.020	12.96		
		64-QAM	-36.15	22.39	-9.60	1.24	H		0.014	11.55		
		256-QAM	-38.26	20.28	-9.60	1.24	H		0.009	9.44		
680.5		PI/2 BPSK	-32.28	26.60	-9.60	1.28	H		0.037	15.73	1	23
		QPSK	-32.29	26.61	-9.60	1.28	H		0.037	15.72		
		16-QAM	-33.36	25.53	-9.60	1.28	H		0.029	14.65		
		64-QAM	-34.62	24.27	-9.60	1.28	H		0.022	13.39		
		256-QAM	-37.30	21.59	-9.60	1.28	H		0.012	10.71		
695.5		PI/2 BPSK	-32.29	26.63	-9.60	1.29	H		0.038	15.74	1	1
		QPSK	-32.33	26.59	-9.60	1.29	H		0.037	15.70		
		16-QAM	-33.41	25.51	-9.60	1.29	H		0.029	14.62		
		64-QAM	-34.73	24.19	-9.60	1.29	H		0.021	13.30		
		256-QAM	-37.32	21.60	-9.60	1.29	H		0.012	10.71		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured	Substitute	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
668.0	Sub6 n71/ 10 MHz [15 kHz]	PI/2 BPSK	-33.04	25.60	-9.60	1.24	H	< 3.00	0.030	14.76	1	26
		QPSK	-33.87	24.77	-9.60	1.24	H		0.025	13.93		
		16-QAM	-34.61	24.03	-9.60	1.24	H		0.021	13.19		
		64-QAM	-35.65	22.99	-9.60	1.24	H		0.016	12.15		
		256-QAM	-37.99	20.65	-9.60	1.24	H		0.010	9.81		
680.5		PI/2 BPSK	-32.32	26.57	-9.60	1.28	H		0.037	15.69	1	26
		QPSK	-32.35	26.54	-9.60	1.28	H		0.037	15.66		
		16-QAM	-33.42	25.47	-9.60	1.28	H		0.029	14.59		
		64-QAM	-34.68	24.21	-9.60	1.28	H		0.022	13.33		
		256-QAM	-37.37	21.52	-9.60	1.28	H		0.012	10.64		
693.0		PI/2 BPSK	-32.13	26.91	-9.60	1.29	H		0.040	16.02	1	1
		QPSK	-32.16	26.88	-9.60	1.29	H		0.040	15.99		
		16-QAM	-33.43	25.61	-9.60	1.29	H		0.030	14.72		
		64-QAM	-34.73	24.31	-9.60	1.29	H		0.022	13.42		
		256-QAM	-37.32	21.72	-9.60	1.29	H		0.012	10.83		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured	Substitute	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
670.5	Sub6 n71/ 15 MHz [15 kHz]	PI/2 BPSK	-32.43	26.26	-9.60	1.26	H	< 3.00	0.035	15.40	1	77
		QPSK	-32.97	25.72	-9.60	1.26	H		0.031	14.86		
		16-QAM	-33.88	24.81	-9.60	1.26	H		0.025	13.95		
		64-QAM	-35.37	23.32	-9.60	1.26	H		0.018	12.46		
		256-QAM	-37.52	21.17	-9.60	1.26	H		0.011	10.31		
680.5		PI/2 BPSK	-32.21	26.68	-9.60	1.28	H		0.038	15.80	1	77
		QPSK	-32.28	26.61	-9.60	1.28	H		0.037	15.73		
		16-QAM	-33.40	25.49	-9.60	1.28	H		0.029	14.61		
		64-QAM	-34.60	24.29	-9.60	1.28	H		0.022	13.41		
		256-QAM	-37.12	21.77	-9.60	1.28	H		0.012	10.89		
690.5		PI/2 BPSK	-32.17	27.02	-9.60	1.29	H	0.041	16.13	1	39	
		QPSK	-32.20	26.99	-9.60	1.29	H	0.041	16.10			
		16-QAM	-33.33	25.86	-9.60	1.29	H	0.031	14.97			
		64-QAM	-34.70	24.49	-9.60	1.29	H	0.023	13.60			
		256-QAM	-37.42	21.77	-9.60	1.29	H	0.012	10.88			

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured	Substitute	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
673.0	Sub6 n71/ 20 MHz [15 kHz]	PI/2 BPSK	-32.21	26.64	-9.60	1.26	H	< 3.00	0.038	15.78	1	104
		QPSK	-32.39	26.46	-9.60	1.26	H		0.036	15.60		
		16-QAM	-33.50	25.35	-9.60	1.26	H		0.028	14.49		
		64-QAM	-34.79	24.06	-9.60	1.26	H		0.021	13.20		
		256-QAM	-37.50	21.35	-9.60	1.26	H		0.011	10.49		
680.5		PI/2 BPSK	-32.14	26.75	-9.60	1.28	H		0.039	15.87	1	104
		QPSK	-32.20	26.69	-9.60	1.28	H		0.038	15.81		
		16-QAM	-33.27	25.62	-9.60	1.28	H		0.030	14.74		
		64-QAM	-34.61	24.28	-9.60	1.28	H		0.022	13.40		
		256-QAM	-37.39	21.50	-9.60	1.28	H		0.012	10.62		
688.0		PI/2 BPSK	-32.13	26.92	-9.60	1.28	H	0.040	16.04	1	53	
		QPSK	-32.16	26.89	-9.60	1.28	H	0.040	16.01			
		16-QAM	-33.35	25.70	-9.60	1.28	H	0.030	14.82			
		64-QAM	-34.70	24.35	-9.60	1.28	H	0.022	13.47			
		256-QAM	-37.39	21.66	-9.60	1.28	H	0.012	10.78			

8.2 RADIATED SPURIOUS EMISSIONS

NR Band:	<u>N71</u>
Bandwidth:	<u>15 MHz</u>
Modulation:	<u>PI/2 BPSK</u>
Distance:	<u>3 meters</u>
SCS:	<u>15 kHz</u>

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Size
134100 (670.5)	1 341.00	-57.42	7.22	-62.88	1.77	H	-57.43	-13.00	1	77
	2 011.50	-57.30	10.05	-64.64	2.24	H	-56.83	-13.00		
	2 682.00	-58.41	10.84	-63.41	2.61	H	-55.18	-13.00		
136100 (680.5)	1 361.00	-57.37	7.33	-63.30	1.81	H	-57.78	-13.00	1	77
	2 041.50	-57.50	9.68	-63.67	2.25	H	-56.24	-13.00		
	2 722.00	-58.79	10.91	-63.06	2.60	H	-54.75	-13.00		
138100 (690.5)	1 381.00	-57.94	7.44	-64.50	1.87	H	-58.93	-13.00	1	39
	2 071.50	-58.51	9.30	-64.35	2.29	H	-57.34	-13.00		
	2 762.00	-59.73	11.06	-63.35	2.71	H	-55.00	-13.00		

8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
Sub6 n71	5 MHz	680.5	BPSK	25	0	4.06
			QPSK			4.91
			16-QAM			5.74
			64-QAM			5.93
			256-QAM			6.42
	10 MHz		BPSK	50		3.68
			QPSK			4.84
			16-QAM			5.56
			64-QAM			6.07
			256-QAM			6.61
	15 MHz		BPSK	75		3.66
			QPSK			4.63
			16-QAM			5.61
			64-QAM			5.79
			256-QAM			6.38
	20 MHz		BPSK	100		3.62
			QPSK			4.54
			16-QAM			5.51
			64-QAM			5.81
			256-QAM			6.39

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 52 ~ 71.
2. Peak- to- Average Ratio is not required. These values are reported for information only.

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
Sub6 n71	5 MHz	680.5	BPSK	25	0	4.5667
			QPSK			4.5775
			16-QAM			4.5452
			64-QAM			4.6025
			256-QAM			4.5612
	10 MHz		BPSK	50		8.9540
			QPSK			8.9963
			16-QAM			8.9578
			64-QAM			8.9545
			256-QAM			8.9983
	15 MHz		BPSK	75		13.449
			QPSK			13.461
			16-QAM			13.455
			64-QAM			13.461
			256-QAM			13.398
	20 MHz		BPSK	100		17.909
			QPSK			17.927
			16-QAM			17.865
			64-QAM			17.897
			256-QAM			17.919

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 72 ~ 91.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
Sub6 n71	5	665.5	5.1815	30.815	-74.791	-43.976	-13.00
		680.5	4.8954	30.200	-74.832	-44.632	
		695.5	9.1067	30.815	-74.231	-43.416	
	10	668.0	4.9253	30.200	-74.035	-43.835	
		680.5	3.8091	30.200	-74.562	-44.362	
		693.0	3.7673	30.200	-74.457	-44.257	
	15	670.5	3.8041	30.200	-74.307	-44.107	
		680.5	9.1386	30.815	-74.841	-44.026	
		690.5	4.5803	30.200	-74.466	-44.266	
	20	673.0	8.2862	30.815	-74.880	-44.065	
		680.5	3.7827	30.200	-74.826	-44.626	
		688.0	4.0419	30.200	-73.981	-43.781	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 92 ~ 103.
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
3. Factor(dB) = Cable Loss + Attenuator + Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	27.494
1 – 5	30.200
5 – 10	30.815
10 – 15	31.340
15 – 20	31.713
Above 20	32.355

8.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 104 ~ 135.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

- ▣ BandWidth: 5 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency	Voltage	Temp.	Frequency	Frequency Error	Deviation	ppm
(MHz)	(%)	(°C)	(Hz)	(Hz)	(%)	
665.5	100 %	+20(Ref)	665 499 996	0.0	0.000 000	0.000
	100 %	-30	665 499 992	-4.2	-0.000 001	-0.006
	100 %	-20	665 499 991	-4.5	-0.000 001	-0.007
	100 %	-10	665 499 993	-3.1	0.000 000	-0.005
	100 %	0	665 499 992	-3.6	-0.000 001	-0.005
	100 %	+10	665 499 992	-3.9	-0.000 001	-0.006
	100 %	+30	665 499 991	-4.4	-0.000 001	-0.007
	100 %	+40	665 499 991	-4.6	-0.000 001	-0.007
	100 %	+50	665 499 992	-3.7	-0.000 001	-0.006
	Batt. Endpoint	+20	665 499 992	-3.5	-0.000 001	-0.005
695.5	100 %	+20(Ref)	695 500 000	0.0	0.000 000	0.000
	100 %	-30	695 500 000	-0.4	0.000 000	-0.001
	100 %	-20	695 500 000	-0.5	0.000 000	-0.001
	100 %	-10	695 500 001	0.3	0.000 000	0.000
	100 %	0	695 499 999	-1.4	0.000 000	-0.002
	100 %	+10	695 500 000	-0.8	0.000 000	-0.001
	100 %	+30	695 500 001	0.4	0.000 000	0.001
	100 %	+40	695 500 002	1.2	0.000 000	0.002
	100 %	+50	695 500 000	-0.3	0.000 000	0.000
	Batt. Endpoint	+20	695 500 001	0.5	0.000 000	0.001

- ▣ BandWidth: 10 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency	Voltage	Temp.	Frequency	Frequency Error	Deviation	ppm
(MHz)	(%)	(°C)	(Hz)	(Hz)	(%)	
668.0	100 %	+20(Ref)	668 000 005	0.0	0.000 000	0.000
	100 %	-30	668 000 009	4.0	0.000 001	0.006
	100 %	-20	668 000 008	2.7	0.000 000	0.004
	100 %	-10	668 000 008	3.1	0.000 000	0.005
	100 %	0	668 000 009	4.1	0.000 001	0.006
	100 %	+10	668 000 009	4.5	0.000 001	0.007
	100 %	+30	668 000 010	4.9	0.000 001	0.007
	100 %	+40	668 000 008	3.3	0.000 000	0.005
	100 %	+50	668 000 009	3.7	0.000 001	0.006
	Batt. Endpoint	+20	668 000 008	3.4	0.000 001	0.005
693.0	100 %	+20(Ref)	693 000 003	0.0	0.000 000	0.000
	100 %	-30	693 000 007	4.6	0.000 001	0.007
	100 %	-20	693 000 006	3.2	0.000 000	0.005
	100 %	-10	693 000 007	4.3	0.000 001	0.006
	100 %	0	693 000 006	2.9	0.000 000	0.004
	100 %	+10	693 000 005	2.3	0.000 000	0.003
	100 %	+30	693 000 007	4.2	0.000 001	0.006
	100 %	+40	693 000 005	2.6	0.000 000	0.004
	100 %	+50	693 000 006	2.8	0.000 000	0.004
	Batt. Endpoint	+20	693 000 005	2.6	0.000 000	0.004

- ▣ BandWidth: 15 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency	Voltage	Temp.	Frequency	Frequency Error	Deviation	ppm
(MHz)	(%)	(°C)	(Hz)	(Hz)	(%)	
670.5	100 %	+20(Ref)	670 500 001	0.0	0.000 000	0.000
	100 %	-30	670 500 002	1.7	0.000 000	0.002
	100 %	-20	670 500 002	1.9	0.000 000	0.003
	100 %	-10	670 500 003	2.3	0.000 000	0.003
	100 %	0	670 500 002	1.5	0.000 000	0.002
	100 %	+10	670 500 002	1.3	0.000 000	0.002
	100 %	+30	670 500 002	1.3	0.000 000	0.002
	100 %	+40	670 500 003	2.6	0.000 000	0.004
	100 %	+50	670 500 001	0.7	0.000 000	0.001
	Batt. Endpoint	+20	670 500 003	2.6	0.000 000	0.004
690.5	100 %	+20(Ref)	690 500 001	0.0	0.000 000	0.000
	100 %	-30	690 500 002	1.6	0.000 000	0.002
	100 %	-20	690 500 001	0.8	0.000 000	0.001
	100 %	-10	690 500 000	-0.3	0.000 000	0.000
	100 %	0	690 500 001	0.6	0.000 000	0.001
	100 %	+10	690 500 001	1.0	0.000 000	0.001
	100 %	+30	690 500 001	0.2	0.000 000	0.000
	100 %	+40	690 500 002	1.6	0.000 000	0.002
	100 %	+50	690 500 001	0.7	0.000 000	0.001
	Batt. Endpoint	+20	690 500 001	0.1	0.000 000	0.000

- ▣ BandWidth: 20 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency	Voltage	Temp.	Frequency	Frequency Error	Deviation	ppm
(MHz)	(%)	(°C)	(Hz)	(Hz)	(%)	
673.0	100 %	+20(Ref)	672 999 999	0.0	0.000 000	0.000
	100 %	-30	673 000 000	0.2	0.000 000	0.000
	100 %	-20	673 000 001	1.3	0.000 000	0.002
	100 %	-10	672 999 999	-0.3	0.000 000	0.000
	100 %	0	673 000 000	0.1	0.000 000	0.000
	100 %	+10	673 000 000	0.9	0.000 000	0.001
	100 %	+30	672 999 998	-1.0	0.000 000	-0.001
	100 %	+40	672 999 999	-0.9	0.000 000	-0.001
	100 %	+50	672 999 999	-0.5	0.000 000	-0.001
	Batt. Endpoint	+20	672 999 999	-0.1	0.000 000	0.000
688.0	100 %	+20(Ref)	688 000 000	0.0	0.000 000	0.000
	100 %	-30	688 000 001	1.3	0.000 000	0.002
	100 %	-20	688 000 000	-0.2	0.000 000	0.000
	100 %	-10	687 999 999	-1.0	0.000 000	-0.001
	100 %	0	688 000 000	0.0	0.000 000	0.000
	100 %	+10	687 999 999	-1.4	0.000 000	-0.002
	100 %	+30	687 999 999	-1.0	0.000 000	-0.001
	100 %	+40	688 000 000	0.0	0.000 000	0.000
	100 %	+50	688 000 001	0.8	0.000 000	0.001
	Batt. Endpoint	+20	688 000 000	-0.4	0.000 000	-0.001

9. TEST DATA(Sub 1 ANT)

9.1 EFFECTIVE RADIATED POWER

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured	Substitute	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
665.5	Sub6 n71/ 5 MHz [15 kHz]	PI/2 BPSK	-30.93	27.61	-9.60	1.24	H	< 3.00	0.048	16.77	1	12
		QPSK	-32.00	26.54	-9.60	1.24	H		0.037	15.70		
		16-QAM	-32.74	25.80	-9.60	1.24	H		0.031	14.96		
		64-QAM	-33.94	24.60	-9.60	1.24	H		0.024	13.76		
		256-QAM	-35.86	22.68	-9.60	1.24	H		0.015	11.84		
680.5		PI/2 BPSK	-29.68	29.21	-9.60	1.28	H		0.068	18.33	1	12
		QPSK	-29.72	29.17	-9.60	1.28	H		0.068	18.29		
		16-QAM	-30.78	28.11	-9.60	1.28	H		0.053	17.23		
		64-QAM	-32.10	26.79	-9.60	1.28	H		0.039	15.91		
		256-QAM	-34.73	24.16	-9.60	1.28	H		0.021	13.28		
695.5		PI/2 BPSK	-30.11	28.81	-9.60	1.29	H		0.062	17.92	1	1
		QPSK	-30.21	28.71	-9.60	1.29	H		0.061	17.82		
		16-QAM	-31.32	27.60	-9.60	1.29	H		0.047	16.71		
		64-QAM	-32.57	26.35	-9.60	1.29	H		0.035	15.46		
		256-QAM	-35.18	23.74	-9.60	1.29	H		0.019	12.85		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured	Substitute	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
668.0	Sub6 n71/ 10 MHz [15 kHz]	PI/2 BPSK	-31.03	27.61	-9.60	1.24	H	< 3.00	0.048	16.77	1	26
		QPSK	-31.82	26.82	-9.60	1.24	H		0.040	15.98		
		16-QAM	-32.61	26.03	-9.60	1.24	H		0.033	15.19		
		64-QAM	-33.93	24.71	-9.60	1.24	H		0.024	13.87		
		256-QAM	-36.05	22.59	-9.60	1.24	H		0.015	11.75		
680.5		PI/2 BPSK	-29.59	29.30	-9.60	1.28	H		0.070	18.42	1	50
		QPSK	-29.65	29.24	-9.60	1.28	H		0.069	18.36		
		16-QAM	-30.74	28.15	-9.60	1.28	H		0.053	17.27		
		64-QAM	-32.11	26.78	-9.60	1.28	H		0.039	15.90		
		256-QAM	-34.72	24.17	-9.60	1.28	H		0.021	13.29		
693.0		PI/2 BPSK	-29.68	29.36	-9.60	1.29	H	0.070	18.47	1		
		QPSK	-29.78	29.26	-9.60	1.29	H	0.069	18.37			
		16-QAM	-30.96	28.08	-9.60	1.29	H	0.052	17.19			
		64-QAM	-32.21	26.83	-9.60	1.29	H	0.039	15.94			
		256-QAM	-34.91	24.13	-9.60	1.29	H	0.021	13.24			

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured	Substitute	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
670.5	Sub6 n71/ 15 MHz [15 kHz]	PI/2 BPSK	-31.23	27.46	-9.60	1.26	H	< 3.00	0.046	16.60	1	1
		QPSK	-32.16	26.53	-9.60	1.26	H		0.037	15.67		
		16-QAM	-32.94	25.75	-9.60	1.26	H		0.031	14.89		
		64-QAM	-34.08	24.61	-9.60	1.26	H		0.024	13.75		
		256-QAM	-35.82	22.87	-9.60	1.26	H		0.016	12.01		
680.5		PI/2 BPSK	-29.53	29.36	-9.60	1.28	H		0.071	18.48	1	1
		QPSK	-29.67	29.22	-9.60	1.28	H		0.068	18.34		
		16-QAM	-30.78	28.11	-9.60	1.28	H		0.053	17.23		
		64-QAM	-32.06	26.83	-9.60	1.28	H		0.039	15.95		
		256-QAM	-34.54	24.35	-9.60	1.28	H		0.022	13.47		
690.5		PI/2 BPSK	-29.55	29.64	-9.60	1.29	H	0.075	18.75	1	1	
		QPSK	-29.61	29.58	-9.60	1.29	H	0.074	18.69			
		16-QAM	-30.68	28.51	-9.60	1.29	H	0.058	17.62			
		64-QAM	-32.09	27.10	-9.60	1.29	H	0.042	16.21			
		256-QAM	-34.60	24.59	-9.60	1.29	H	0.023	13.70			

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured	Substitute	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
673.0	Sub6 n71/ 20 MHz [15 kHz]	PI/2 BPSK	-31.22	27.63	-9.60	1.26	H	< 3.00	0.048	16.77	1	1
		QPSK	-32.18	26.67	-9.60	1.26	H		0.038	15.81		
		16-QAM	-32.94	25.91	-9.60	1.26	H		0.032	15.05		
		64-QAM	-34.05	24.80	-9.60	1.26	H		0.025	13.94		
		256-QAM	-35.86	22.99	-9.60	1.26	H		0.016	12.13		
680.5		PI/2 BPSK	-29.51	29.38	-9.60	1.28	H		0.071	18.50	1	53
		QPSK	-29.57	29.32	-9.60	1.28	H		0.070	18.44		
		16-QAM	-30.76	28.13	-9.60	1.28	H		0.053	17.25		
		64-QAM	-32.14	26.75	-9.60	1.28	H		0.039	15.87		
		256-QAM	-34.71	24.18	-9.60	1.28	H		0.021	13.30		
688.0		PI/2 BPSK	-29.64	29.41	-9.60	1.28	H	0.071	18.53	1	1	
		QPSK	-29.71	29.34	-9.60	1.28	H	0.070	18.46			
		16-QAM	-30.90	28.15	-9.60	1.28	H	0.053	17.27			
		64-QAM	-32.22	26.83	-9.60	1.28	H	0.039	15.95			
		256-QAM	-35.00	24.05	-9.60	1.28	H	0.021	13.17			

9.2 RADIATED SPURIOUS EMISSIONS

NR Band:	<u>N71</u>
Bandwidth:	<u>15 MHz</u>
Modulation:	<u>PI/2 BPSK</u>
Distance:	<u>3 meters</u>
SCS:	<u>15 kHz</u>

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Size
134100 (670.5)	1 341.00	-58.16	7.22	-63.62	1.77	H	-58.17	-13.00	1	1
	2 011.50	-57.88	10.05	-65.22	2.24	H	-57.41	-13.00		
	2 682.00	-58.78	10.84	-63.78	2.61	H	-55.55	-13.00		
136100 (680.5)	1 361.00	-56.69	7.33	-62.62	1.81	H	-57.10	-13.00	1	1
	2 041.50	-58.31	9.68	-64.48	2.25	H	-57.05	-13.00		
	2 722.00	-58.72	10.91	-62.99	2.60	H	-54.68	-13.00		
138100 (690.5)	1 381.00	-56.35	7.44	-62.91	1.87	H	-57.34	-13.00	1	1
	2 071.50	-58.62	9.30	-64.46	2.29	H	-57.45	-13.00		
	2 762.00	-59.15	11.06	-62.77	2.71	H	-54.42	-13.00		

9.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
Sub6 n71	5 MHz	680.5	BPSK	25	0	4.19
			QPSK			5.19
			16-QAM			6.00
			64-QAM			6.42
			256-QAM			6.59
	10 MHz		BPSK	50		3.99
			QPSK			4.99
			16-QAM			5.69
			64-QAM			6.13
			256-QAM			6.53
	15 MHz		BPSK	75		3.92
			QPSK			4.81
			16-QAM			5.80
			64-QAM			5.97
			256-QAM			6.40
	20 MHz		BPSK	100		3.83
			QPSK			4.82
			16-QAM			5.75
			64-QAM			6.09
			256-QAM			6.50

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 137 ~ 156
2. Peak- to- Average Ratio is not required. These values are reported for information only.

9.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
Sub6 n71	5 MHz	680.5	BPSK	25	0	4.4906
			QPSK			4.5178
			16-QAM			4.4780
			64-QAM			4.5067
			256-QAM			4.5159
	10 MHz		BPSK	50		8.9579
			QPSK			9.0088
			16-QAM			9.0121
			64-QAM			8.9534
			256-QAM			8.9893
	15 MHz		BPSK	75		13.461
			QPSK			13.456
			16-QAM			13.496
			64-QAM			13.458
			256-QAM			13.491
	20 MHz		BPSK	100		17.955
			QPSK			17.968
			16-QAM			17.917
			64-QAM			17.938
			256-QAM			17.998

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 157 ~ 176.

9.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
Sub6 n71	5	665.5	9.7856	30.815	-73.952	-43.137	-13.00
		680.5	3.7912	30.200	-73.984	-43.784	
		695.5	7.9970	30.815	-74.036	-43.221	
	10	668.0	9.9566	30.815	-74.262	-43.447	
		680.5	8.8455	30.815	-73.649	-42.834	
		693.0	9.1630	30.815	-74.418	-43.603	
	15	670.5	4.0240	30.200	-73.182	-42.982	
		680.5	8.8350	30.815	-75.109	-44.294	
		690.5	3.7722	30.200	-74.182	-43.982	
	20	673.0	4.0559	30.200	-74.115	-43.915	
		680.5	8.0190	30.815	-74.742	-43.927	
		688.0	8.2652	30.815	-73.550	-42.735	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 177 ~ 188.
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
3. Factor(dB) = Cable Loss + Attenuator + Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	27.494
1 – 5	30.200
5 – 10	30.815
10 – 15	31.340
15 – 20	31.713
Above 20	32.355

9.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 189 ~ 220

.

9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

- ▣ BandWidth: 5 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency	Voltage	Temp.	Frequency	Frequency Error	Deviation	ppm
(MHz)	(%)	(°C)	(Hz)	(Hz)	(%)	
665.5	100 %	+20(Ref)	665 499 997	0.0	0.000 000	0.000
	100 %	-30	665 499 993	-4.3	-0.000 001	-0.006
	100 %	-20	665 499 995	-2.4	0.000 000	-0.004
	100 %	-10	665 499 995	-2.6	0.000 000	-0.004
	100 %	0	665 499 994	-3.3	-0.000 001	-0.005
	100 %	+10	665 499 994	-3.2	0.000 000	-0.005
	100 %	+30	665 499 994	-3.0	0.000 000	-0.004
	100 %	+40	665 499 995	-2.8	0.000 000	-0.004
	100 %	+50	665 499 993	-4.1	-0.000 001	-0.006
	Batt. Endpoint	+20	665 499 995	-2.8	0.000 000	-0.004
695.5	100 %	+20(Ref)	695 500 002	0.0	0.000 000	0.000
	100 %	-30	695 500 003	1.5	0.000 000	0.002
	100 %	-20	695 500 002	-0.1	0.000 000	0.000
	100 %	-10	695 500 004	1.9	0.000 000	0.003
	100 %	0	695 500 003	1.1	0.000 000	0.002
	100 %	+10	695 500 003	1.2	0.000 000	0.002
	100 %	+30	695 500 003	1.0	0.000 000	0.001
	100 %	+40	695 500 003	1.2	0.000 000	0.002
	100 %	+50	695 500 004	1.9	0.000 000	0.003
	Batt. Endpoint	+20	695 500 003	1.4	0.000 000	0.002

- ▣ BandWidth: 10 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency	Voltage	Temp.	Frequency	Frequency Error	Deviation	ppm
(MHz)	(%)	(°C)	(Hz)	(Hz)	(%)	
668.0	100 %	+20(Ref)	668 000 004	0.0	0.000 000	0.000
	100 %	-30	668 000 007	3.1	0.000 000	0.005
	100 %	-20	668 000 008	4.1	0.000 001	0.006
	100 %	-10	668 000 007	2.8	0.000 000	0.004
	100 %	0	668 000 008	3.3	0.000 000	0.005
	100 %	+10	668 000 008	4.1	0.000 001	0.006
	100 %	+30	668 000 007	3.2	0.000 000	0.005
	100 %	+40	668 000 007	3.2	0.000 000	0.005
	100 %	+50	668 000 009	4.7	0.000 001	0.007
	Batt. Endpoint	+20	668 000 008	3.4	0.000 001	0.005
693.0	100 %	+20(Ref)	693 000 003	0.0	0.000 000	0.000
	100 %	-30	693 000 006	2.8	0.000 000	0.004
	100 %	-20	693 000 006	3.4	0.000 000	0.005
	100 %	-10	693 000 007	3.6	0.000 001	0.005
	100 %	0	693 000 006	3.0	0.000 000	0.004
	100 %	+10	693 000 007	3.7	0.000 001	0.005
	100 %	+30	693 000 007	3.5	0.000 001	0.005
	100 %	+40	693 000 007	4.2	0.000 001	0.006
	100 %	+50	693 000 006	3.3	0.000 000	0.005
	Batt. Endpoint	+20	693 000 007	4.1	0.000 001	0.006

- ▣ BandWidth: 15 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band


Test. Frequency	Voltage	Temp.	Frequency	Frequency Error	Deviation	ppm
(MHz)	(%)	(°C)	(Hz)	(Hz)	(%)	
670.5	100 %	+20(Ref)	670 500 002	0.0	0.000 000	0.000
	100 %	-30	670 500 002	0.2	0.000 000	0.000
	100 %	-20	670 500 002	0.7	0.000 000	0.001
	100 %	-10	670 500 001	-0.6	0.000 000	-0.001
	100 %	0	670 500 001	-0.5	0.000 000	-0.001
	100 %	+10	670 500 002	0.5	0.000 000	0.001
	100 %	+30	670 500 001	-0.3	0.000 000	0.000
	100 %	+40	670 500 003	0.9	0.000 000	0.001
	100 %	+50	670 500 004	2.1	0.000 000	0.003
	Batt. Endpoint	+20	670 500 002	0.7	0.000 000	0.001
690.5	100 %	+20(Ref)	690 500 001	0.0	0.000 000	0.000
	100 %	-30	690 500 004	2.6	0.000 000	0.004
	100 %	-20	690 500 003	1.2	0.000 000	0.002
	100 %	-10	690 500 003	1.9	0.000 000	0.003
	100 %	0	690 500 004	2.3	0.000 000	0.003
	100 %	+10	690 500 003	1.5	0.000 000	0.002
	100 %	+30	690 500 003	1.8	0.000 000	0.003
	100 %	+40	690 500 004	2.4	0.000 000	0.004
	100 %	+50	690 500 003	1.7	0.000 000	0.003
	Batt. Endpoint	+20	690 500 004	2.5	0.000 000	0.004

- ▣ BandWidth: 20 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band


Test. Frequency	Voltage	Temp.	Frequency	Frequency Error	Deviation	ppm
(MHz)	(%)	(°C)	(Hz)	(Hz)	(%)	
673.0	100 %	+20(Ref)	673 000 001	0.0	0.000 000	0.000
	100 %	-30	673 000 002	0.7	0.000 000	0.001
	100 %	-20	673 000 000	-0.9	0.000 000	-0.001
	100 %	-10	673 000 002	0.7	0.000 000	0.001
	100 %	0	673 000 001	0.0	0.000 000	0.000
	100 %	+10	673 000 002	0.5	0.000 000	0.001
	100 %	+30	673 000 000	-0.8	0.000 000	-0.001
	100 %	+40	673 000 002	0.8	0.000 000	0.001
	100 %	+50	673 000 001	0.3	0.000 000	0.000
	Batt. Endpoint	+20	673 000 001	-0.4	0.000 000	-0.001
688.0	100 %	+20(Ref)	687 999 999	0.0	0.000 000	0.000
	100 %	-30	687 999 999	-0.2	0.000 000	0.000
	100 %	-20	687 999 999	-0.6	0.000 000	-0.001
	100 %	-10	688 000 000	0.4	0.000 000	0.001
	100 %	0	688 000 000	0.7	0.000 000	0.001
	100 %	+10	687 999 999	-0.6	0.000 000	-0.001
	100 %	+30	688 000 000	0.9	0.000 000	0.001
	100 %	+40	687 999 999	-0.1	0.000 000	0.000
	100 %	+50	688 000 000	0.7	0.000 000	0.001
	Batt. Endpoint	+20	688 000 000	0.3	0.000 000	0.000

10. TEST PLOTS(Main 1 ANT)


NR71_5 M_PAR_Mid_BPSK_FullRB

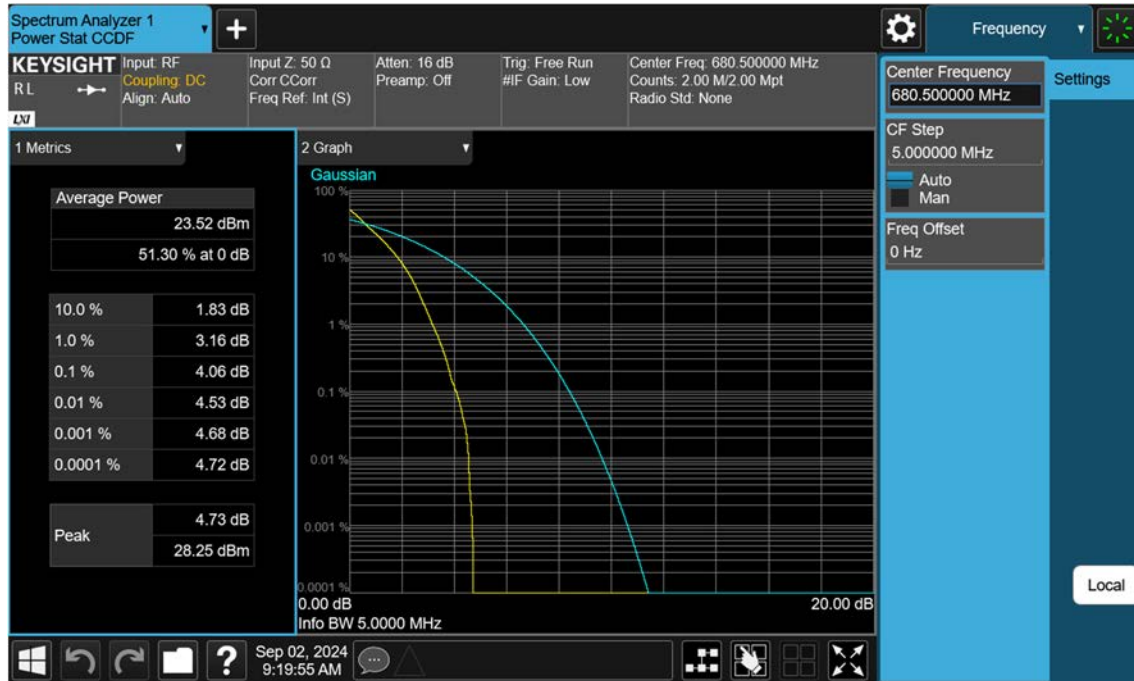


NR71_5 M_PAR_Mid_QPSK_FullRB

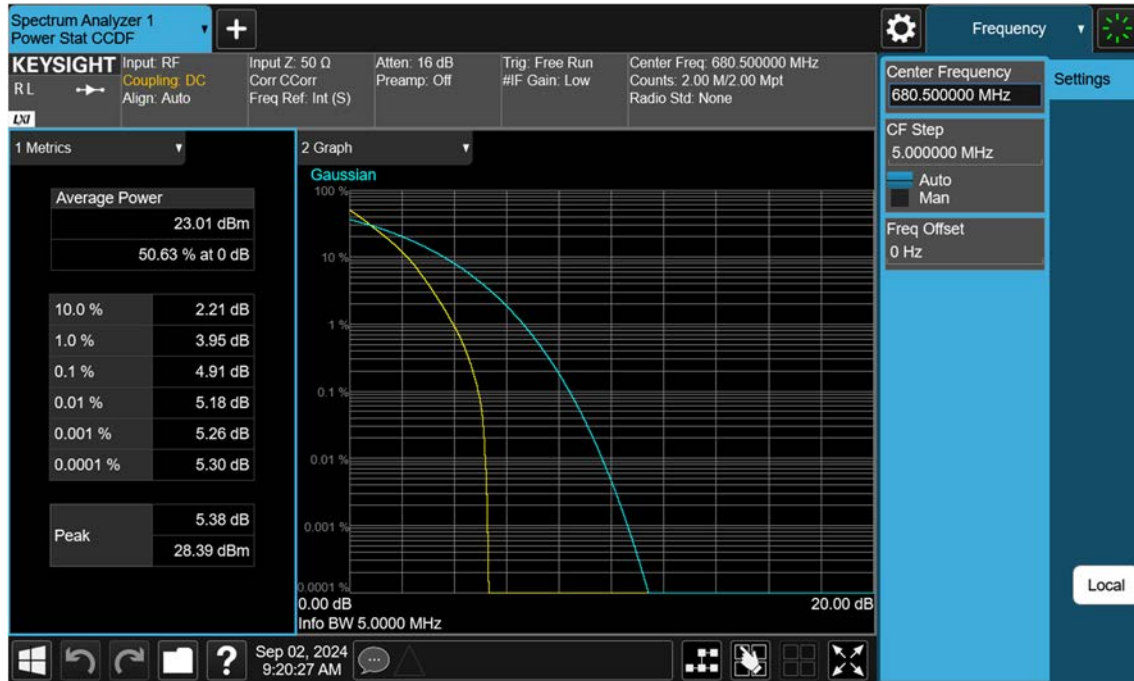


NR71_5 M_PAR_Mid_16QAM_FullRB

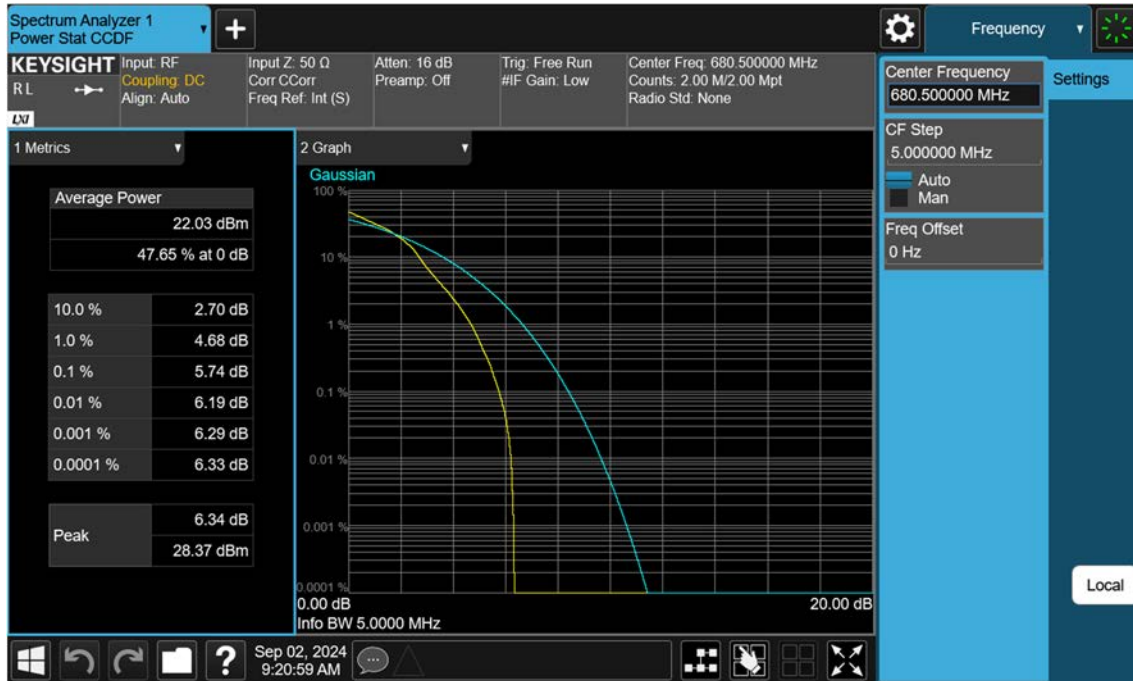


NR71_5 M_PAR_Mid_64QAM_FullRB

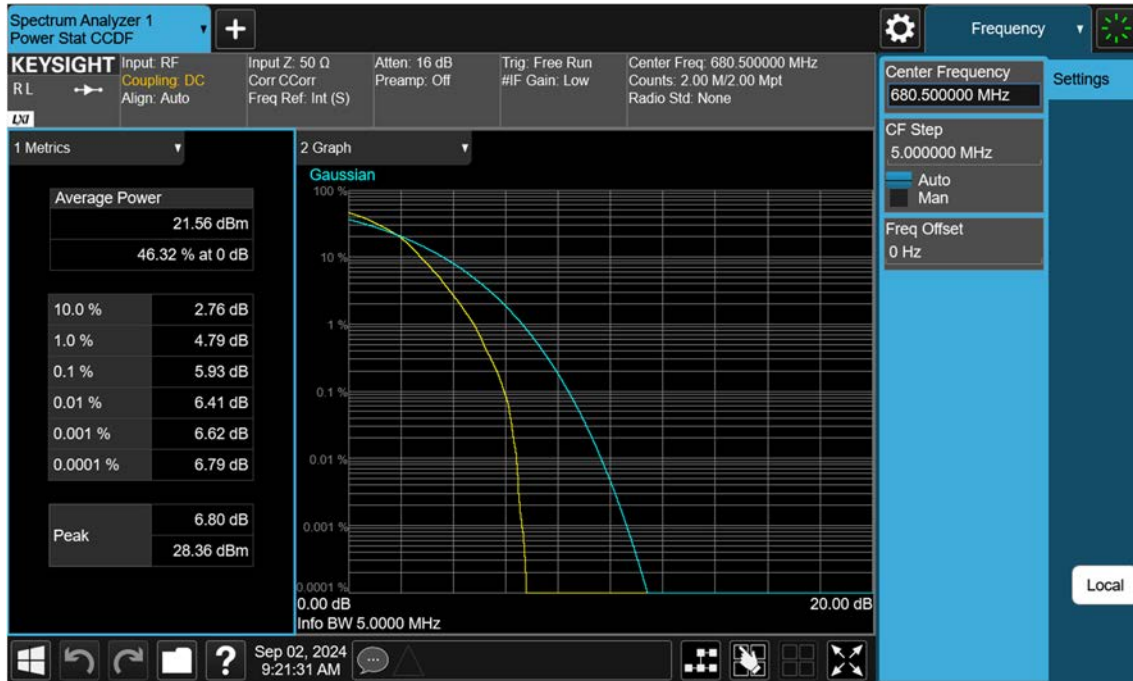


NR71_5 M_PAR_Mid_256QAM_FullRB

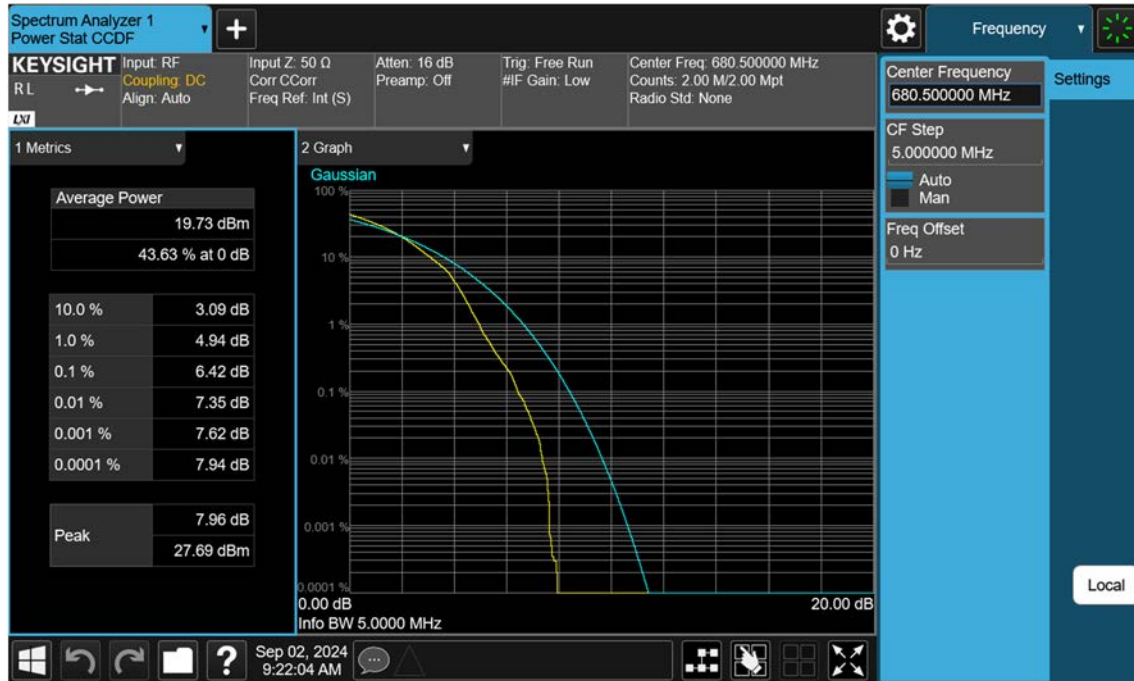

NR71_10 M_PAR_Mid_BPSK_FullRB

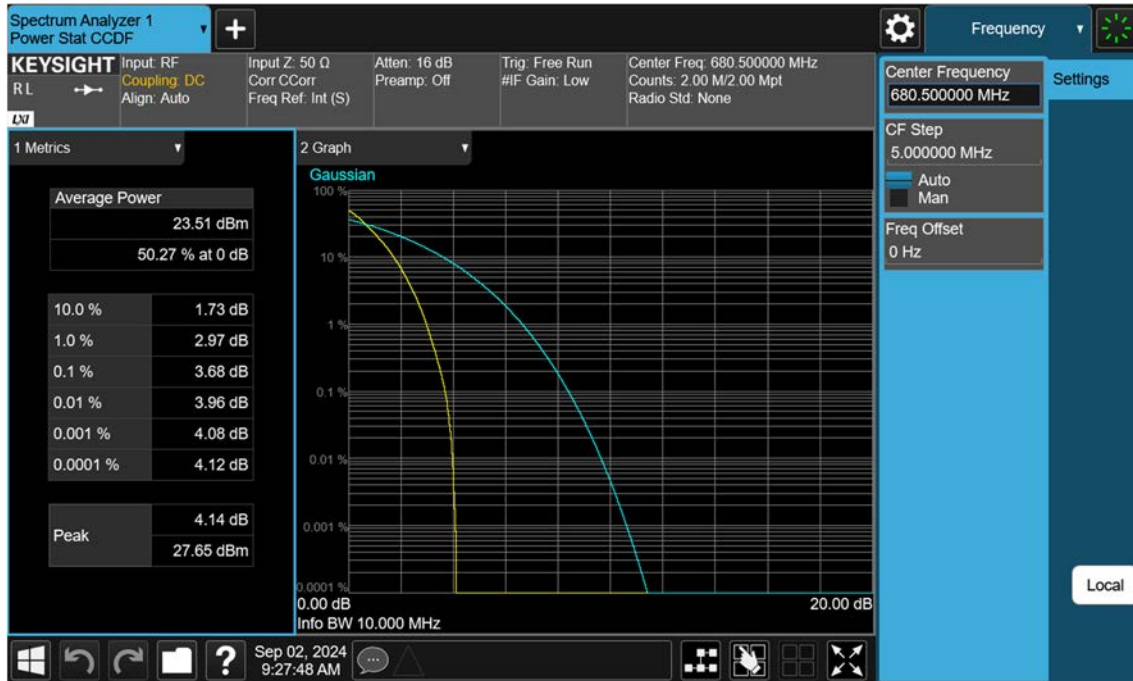

NR71_10 M_PAR_Mid_QPSK_FullRB

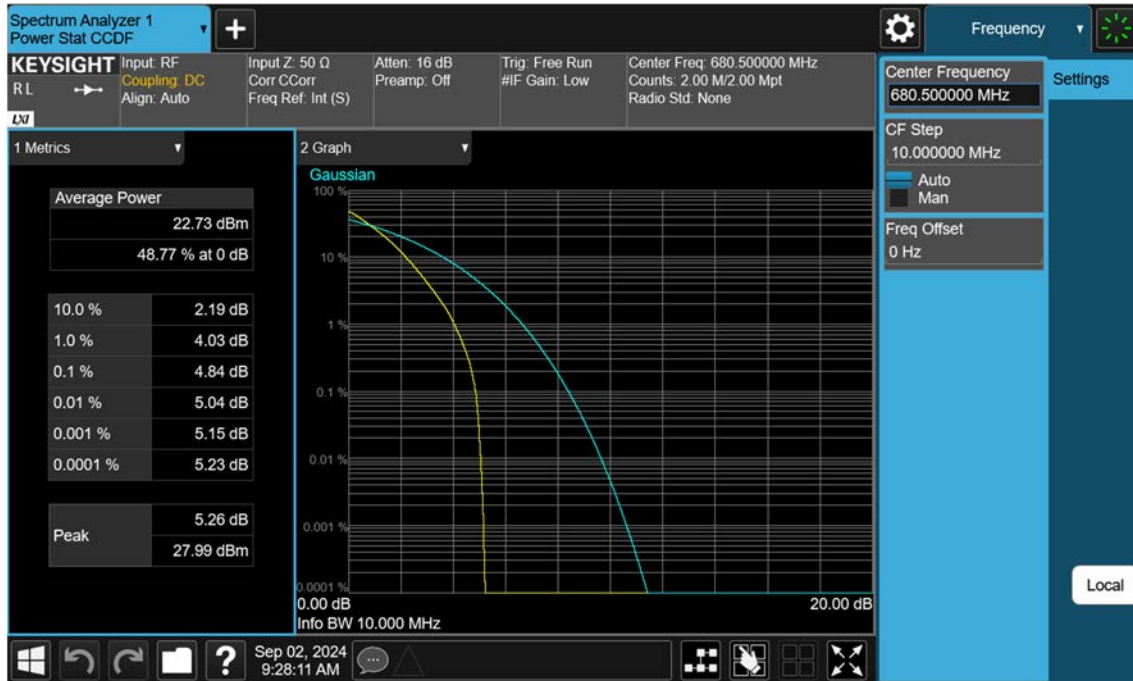


NR71_10 M_PAR_Mid_16QAM_FullRB



NR71_10 M_PAR_Mid_64QAM_FullRB




NR71_10 M_PAR_Mid_256QAM_FullRB

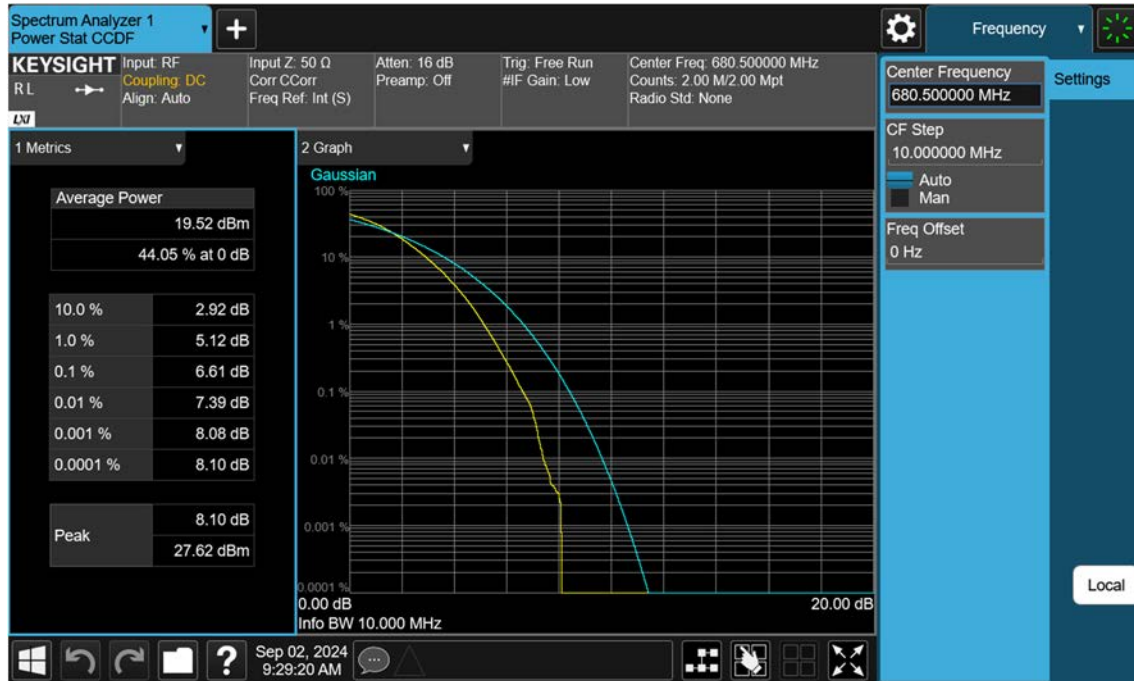


NR71_15 M_PAR_Mid_BPSK_FullIRB




NR71_15 M_PAR_Mid_QPSK_FullRB

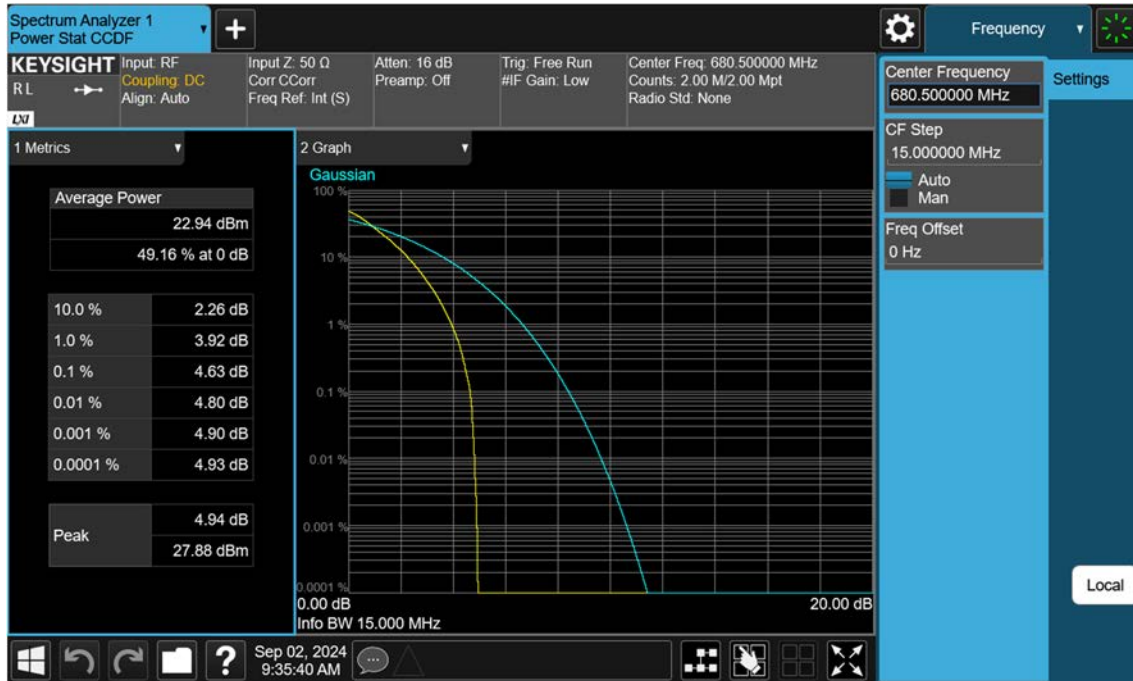

NR71_15 M_PAR_Mid_16QAM_FullRB

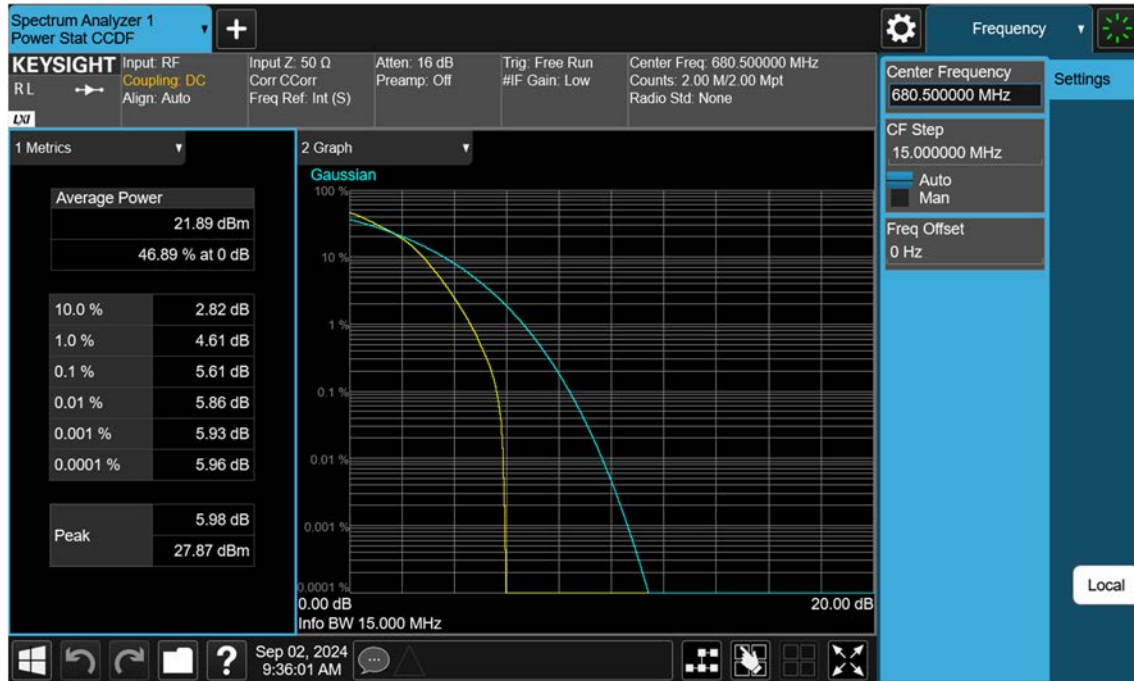


NR71_15 M_PAR_Mid_64QAM_FullRB

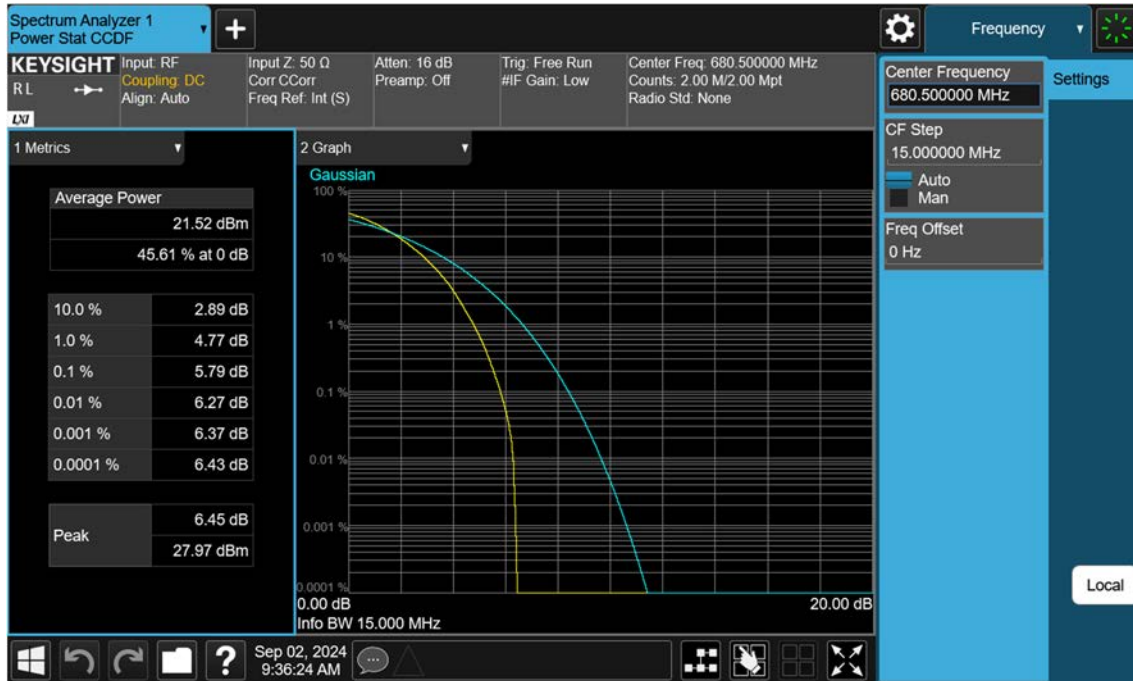


NR71_15 M_PAR_Mid_256QAM_FullRB




NR71_20 M_PAR_Mid_BPSK_FullIRB

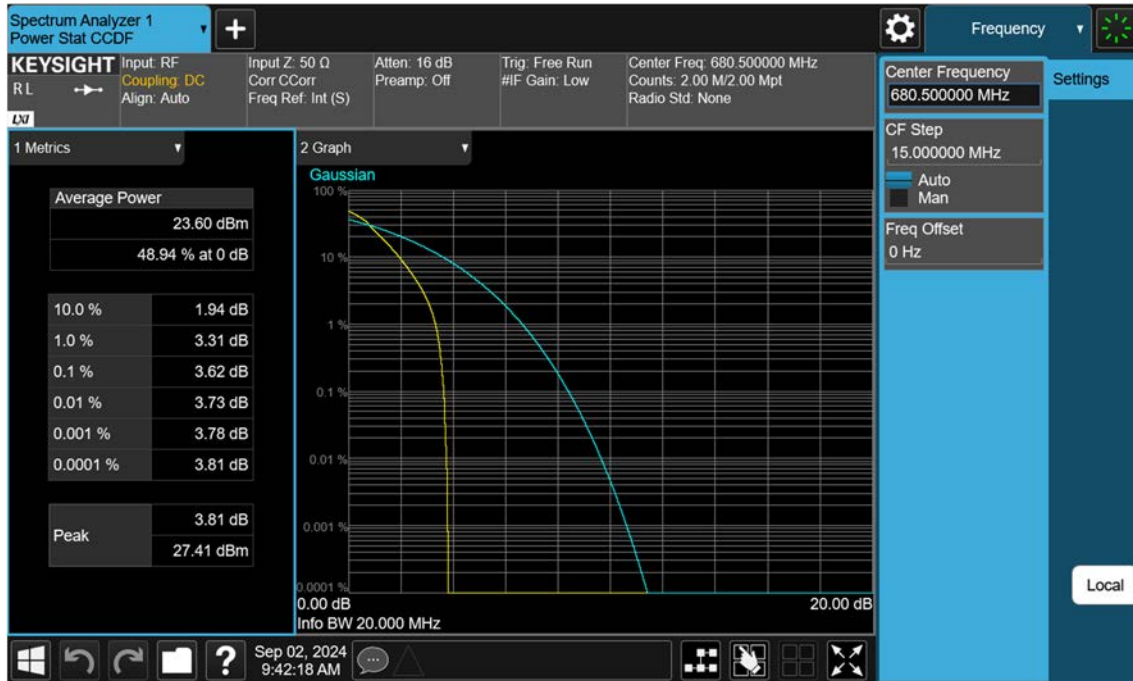


NR71_20 M_PAR_Mid_QPSK_FullRB

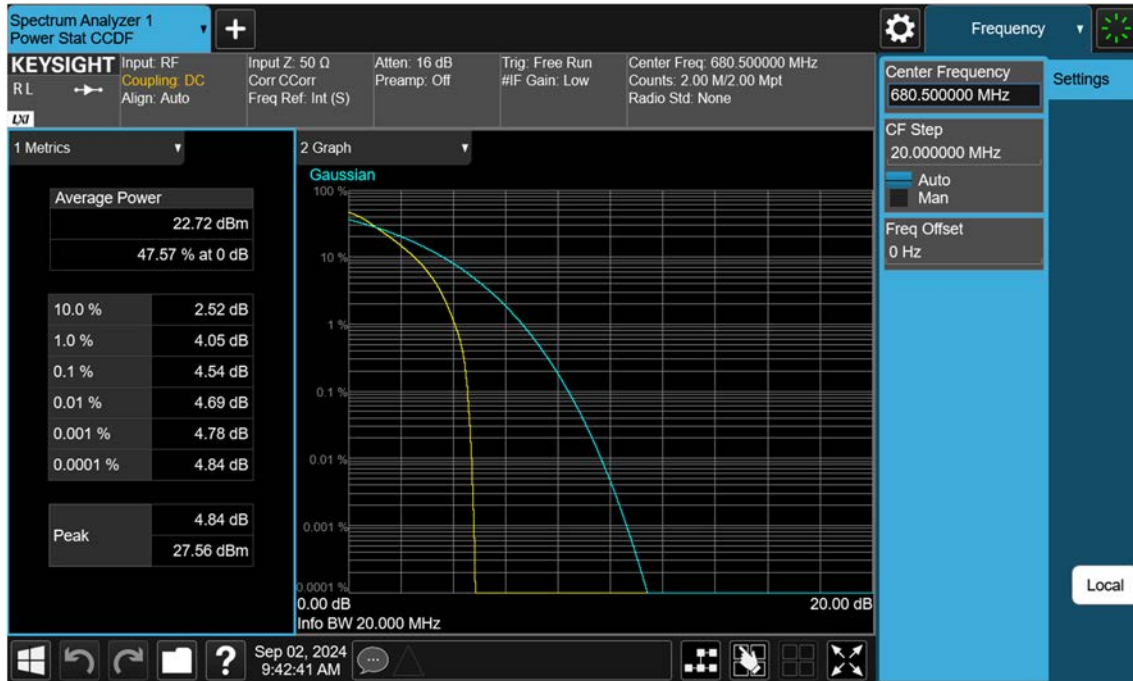

NR71_20 M_PAR_Mid_16QAM_FullRB

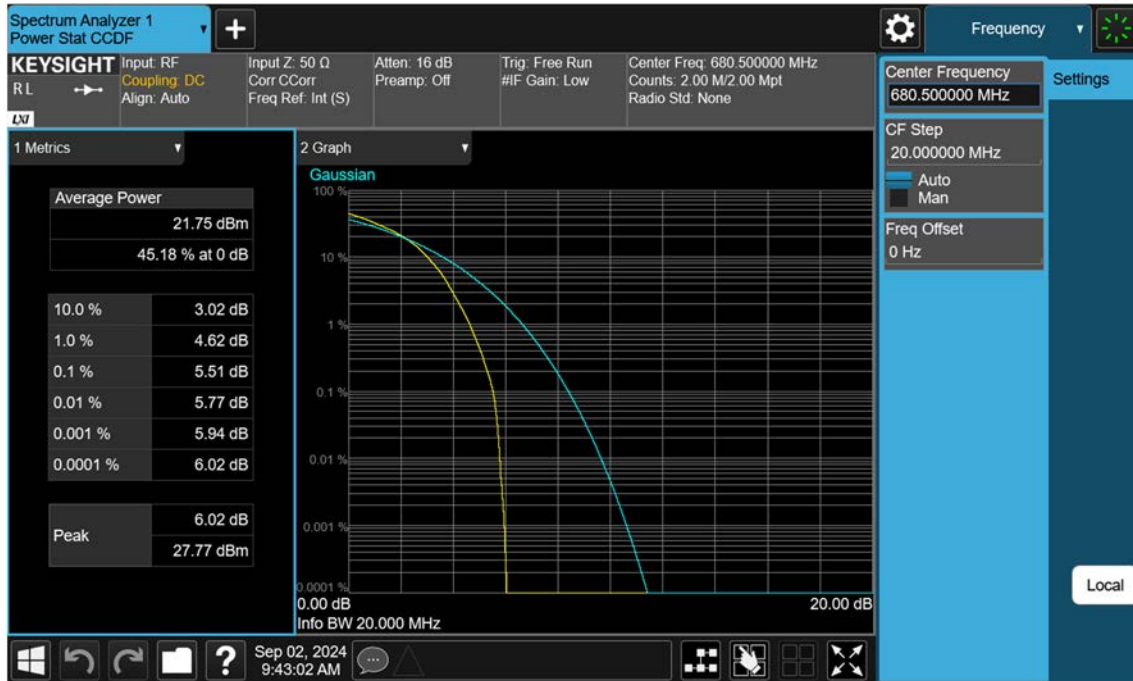


NR71_20 M_PAR_Mid_64QAM_FullRB

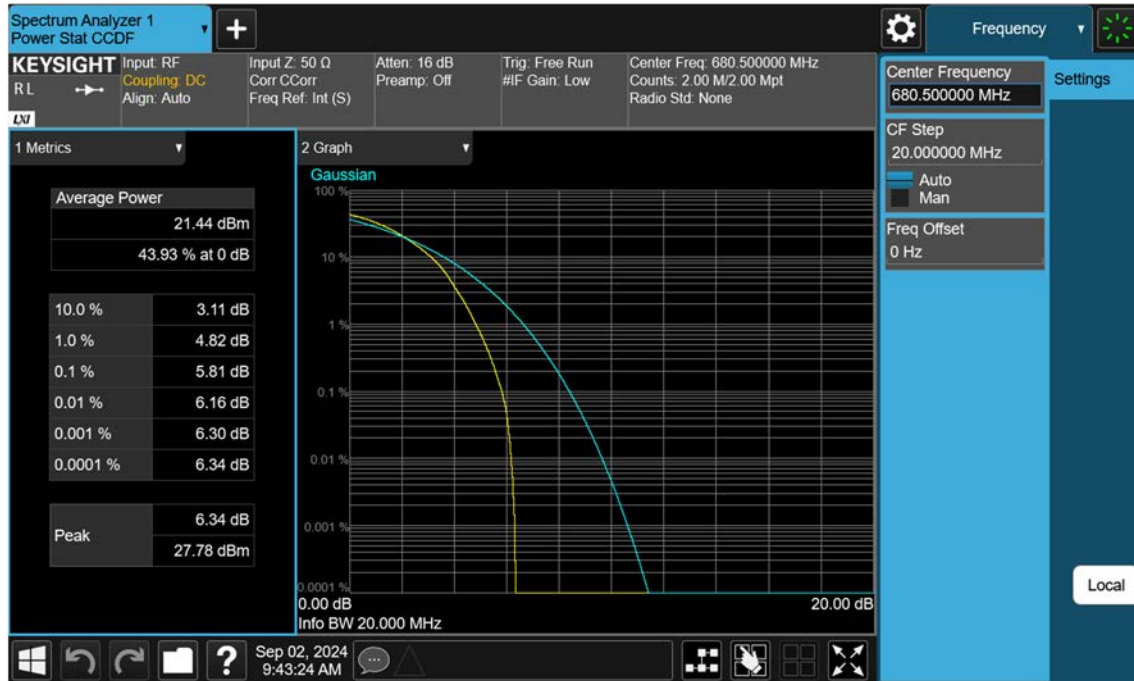

NR71_20 M_PAR_Mid_256QAM_FullRB




NR71_5 M_OBW_Mid_BPSK_FullRB

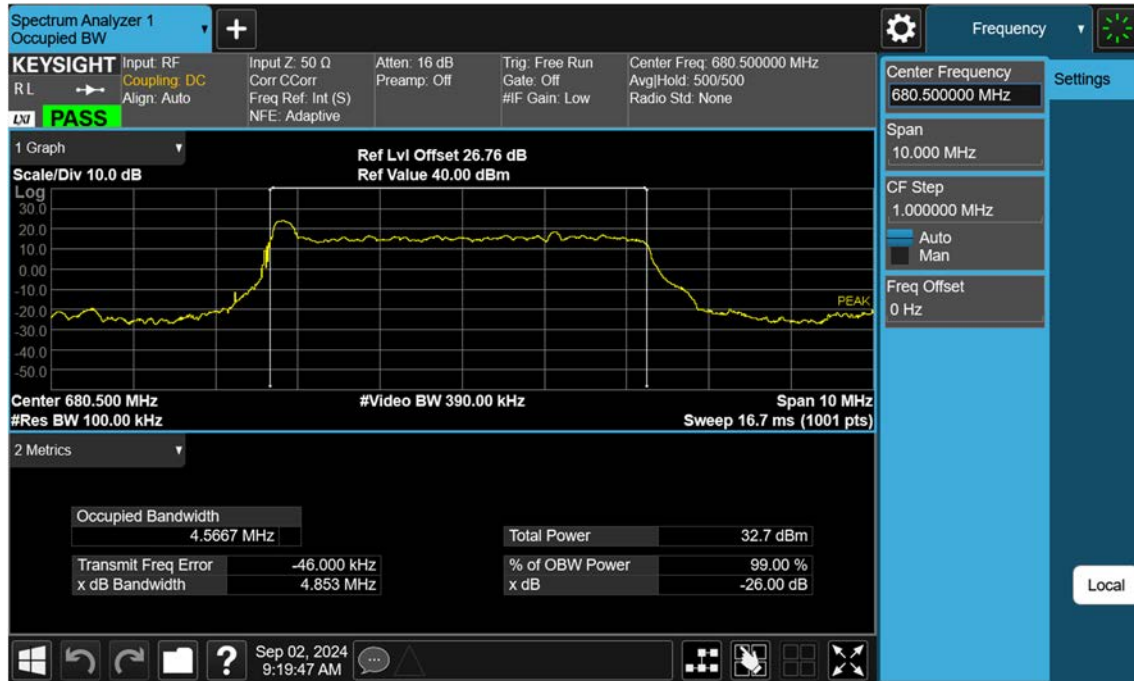


NR71_5 M_OBW_Mid_QPSK_FullRB




NR71_5 M_OBW_Mid_16QAM_FullRB

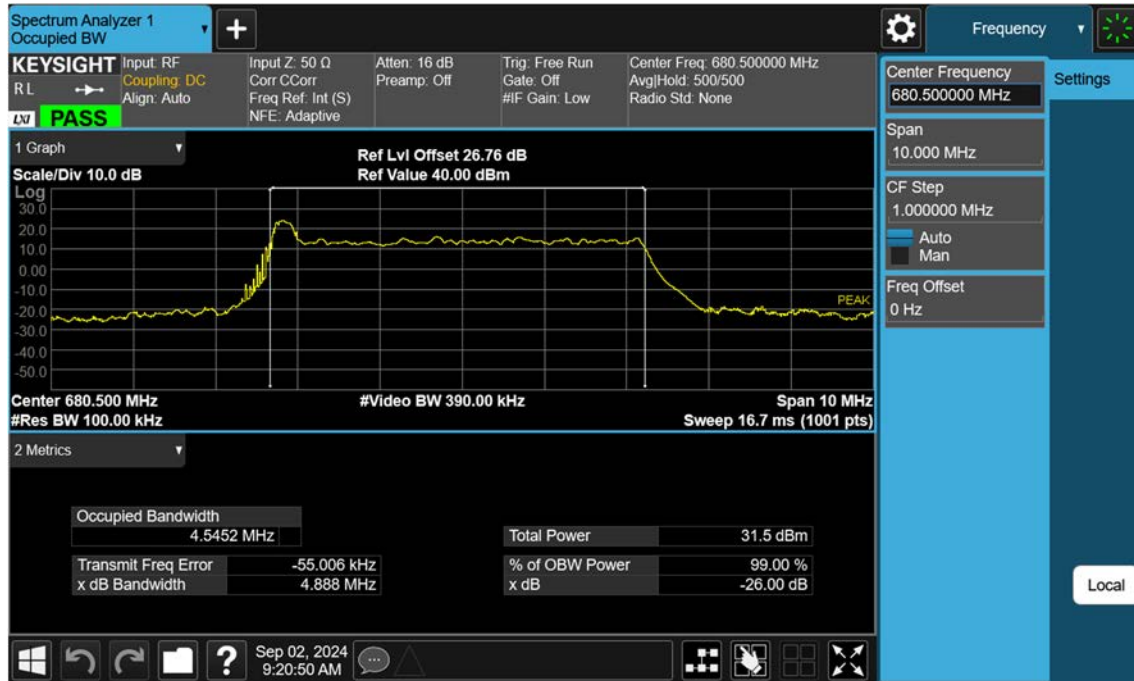


NR71_5 M_OBW_Mid_64QAM_FullRB

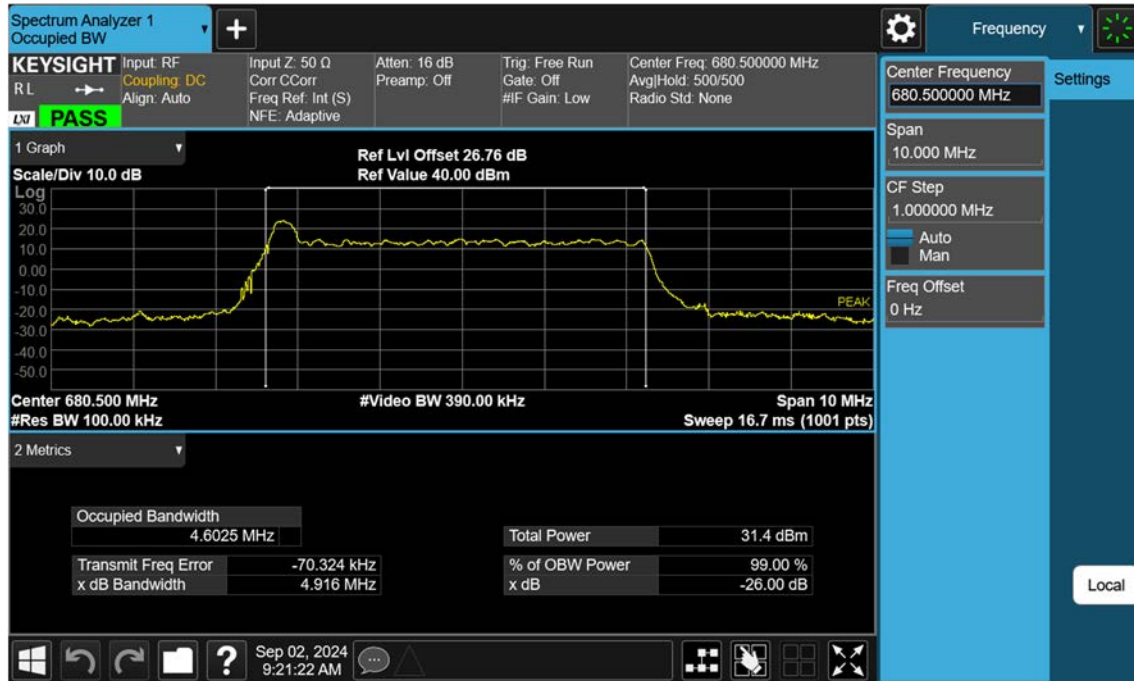


NR71_5 M_OBW_Mid_256QAM_FullRB

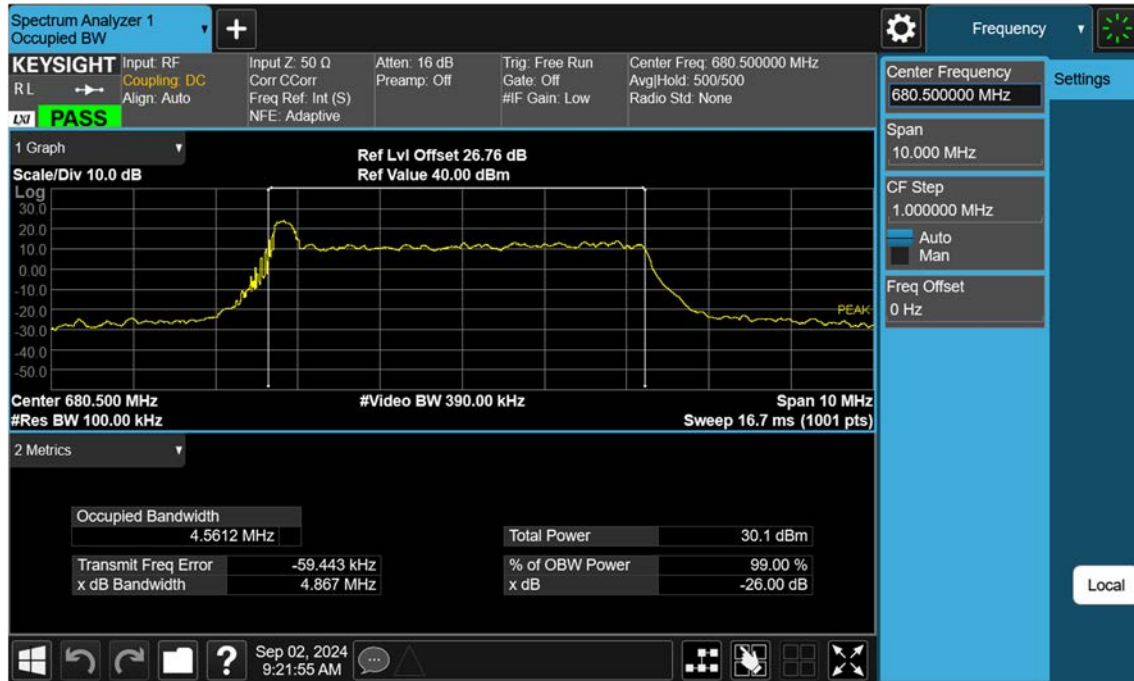


NR71_10 M_OBW_Mid_BPSK_FullRB

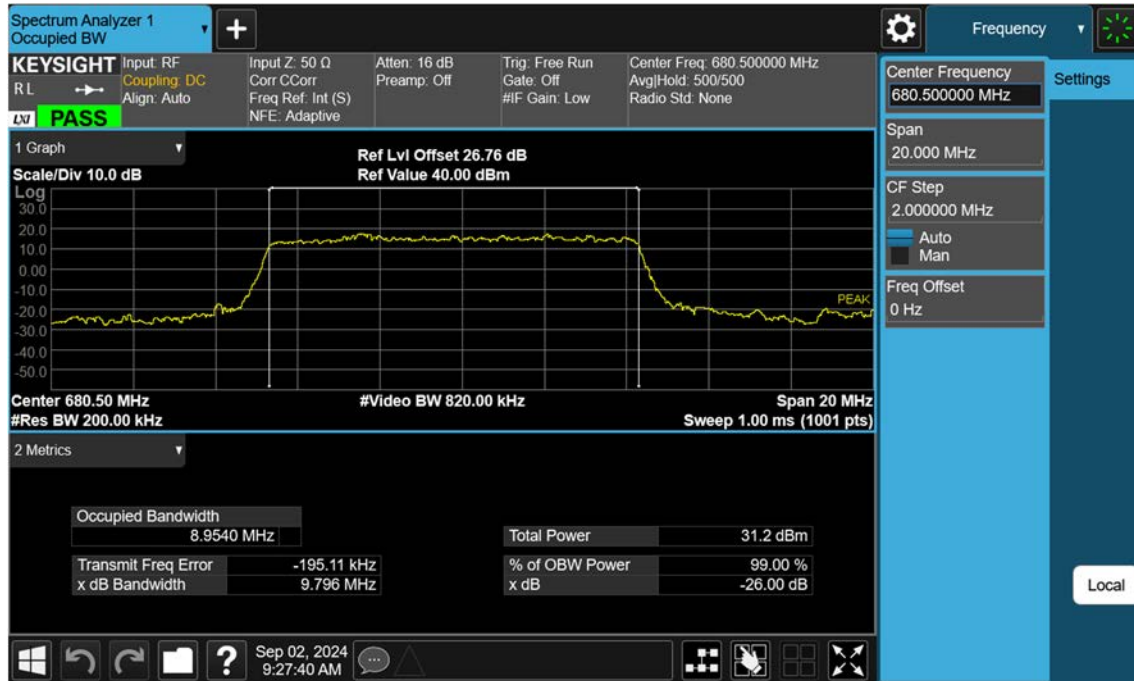


NR71_10 M_OBW_Mid_QPSK_FullIRB

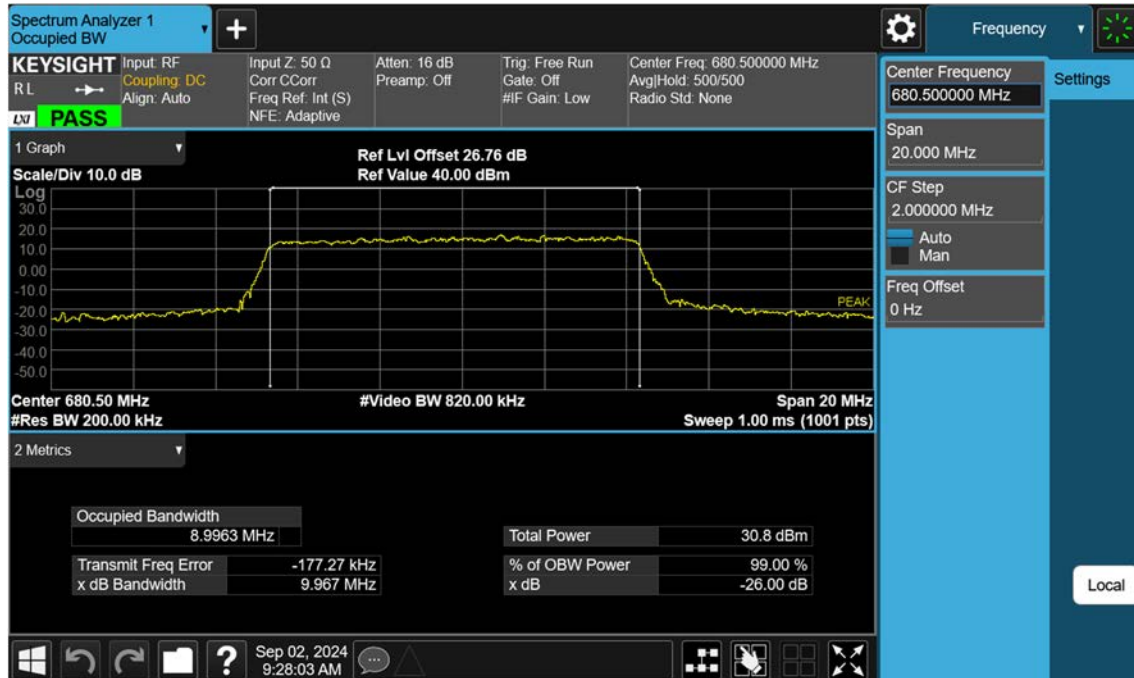


NR71_10 M_OBW_Mid_16QAM_FullRB

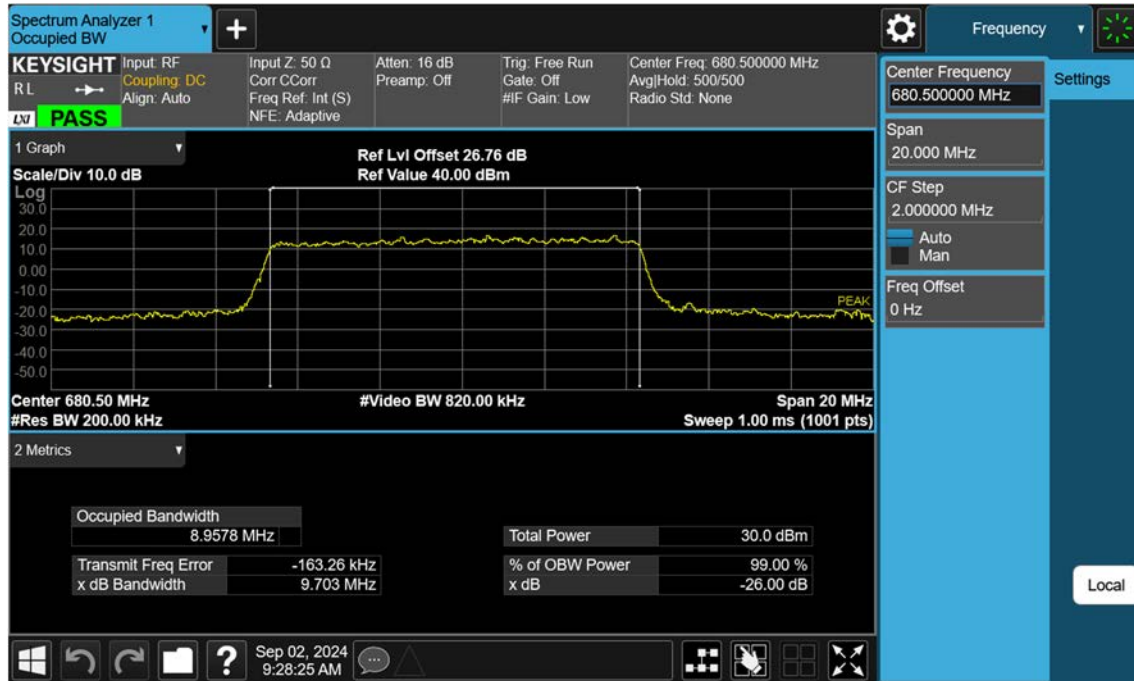

NR71_10 M_OBW_Mid_64QAM_FullRB

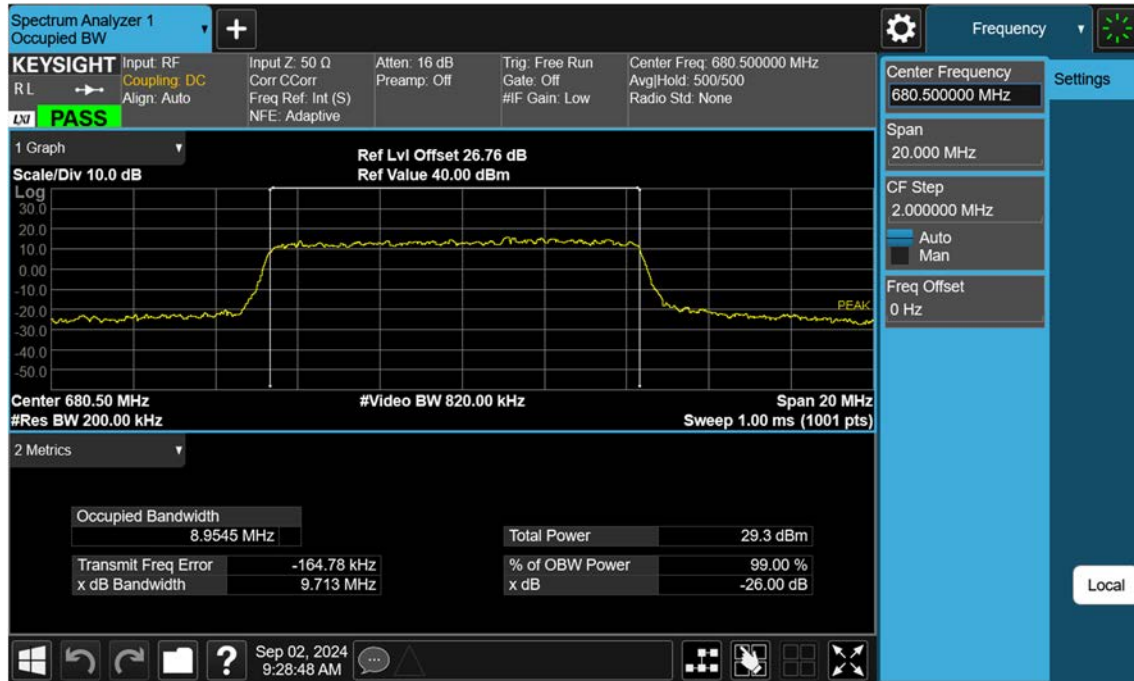


NR71_10 M_OBW_Mid_256QAM_FullRB

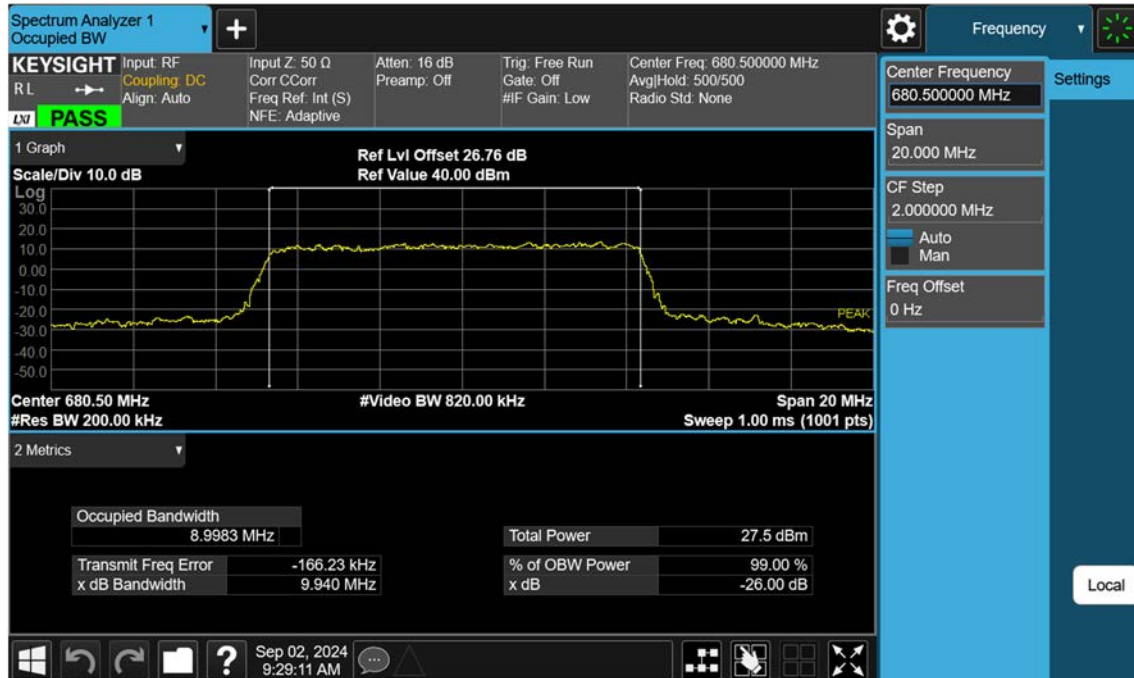


NR71_15 M_OBW_Mid_BPSK_FullRB




NR71_15 M_OBW_Mid_QPSK_FullRB

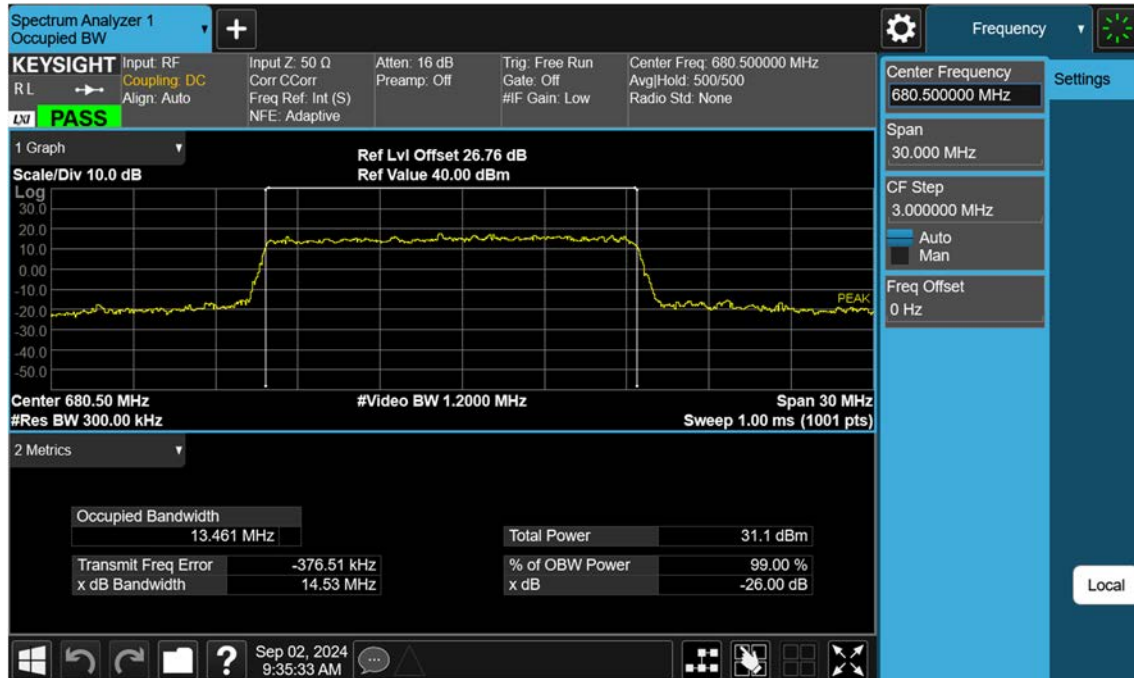


NR71_15 M_OBW_Mid_16QAM_FullRB

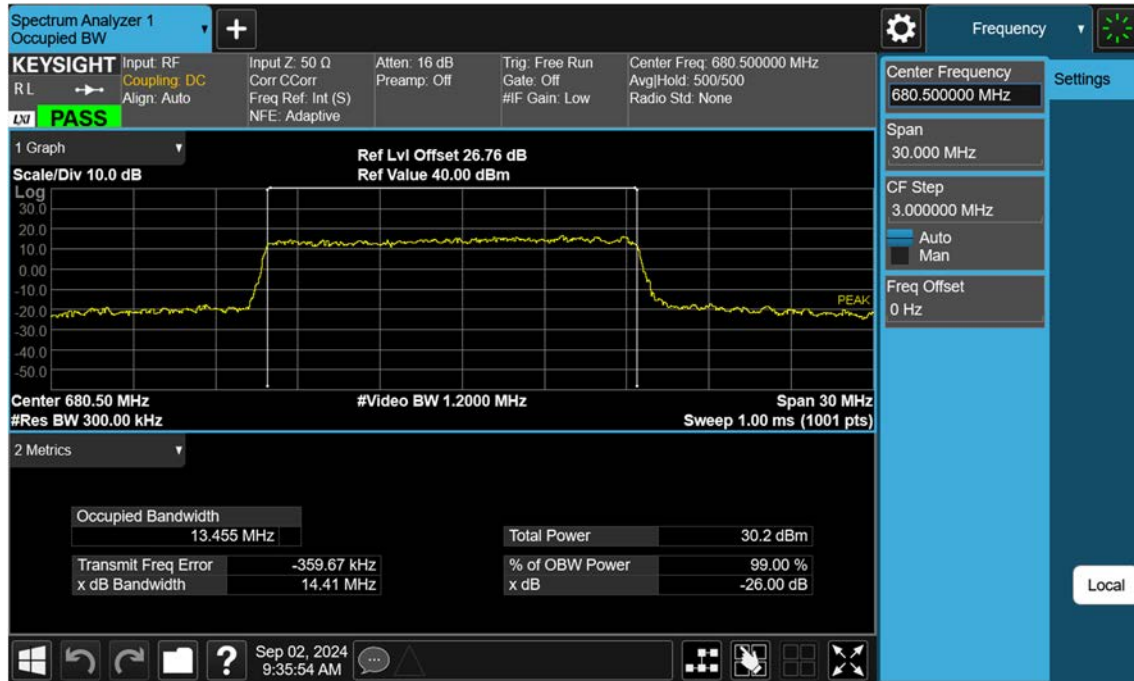


NR71_15 M_OBW_Mid_64QAM_FullRB

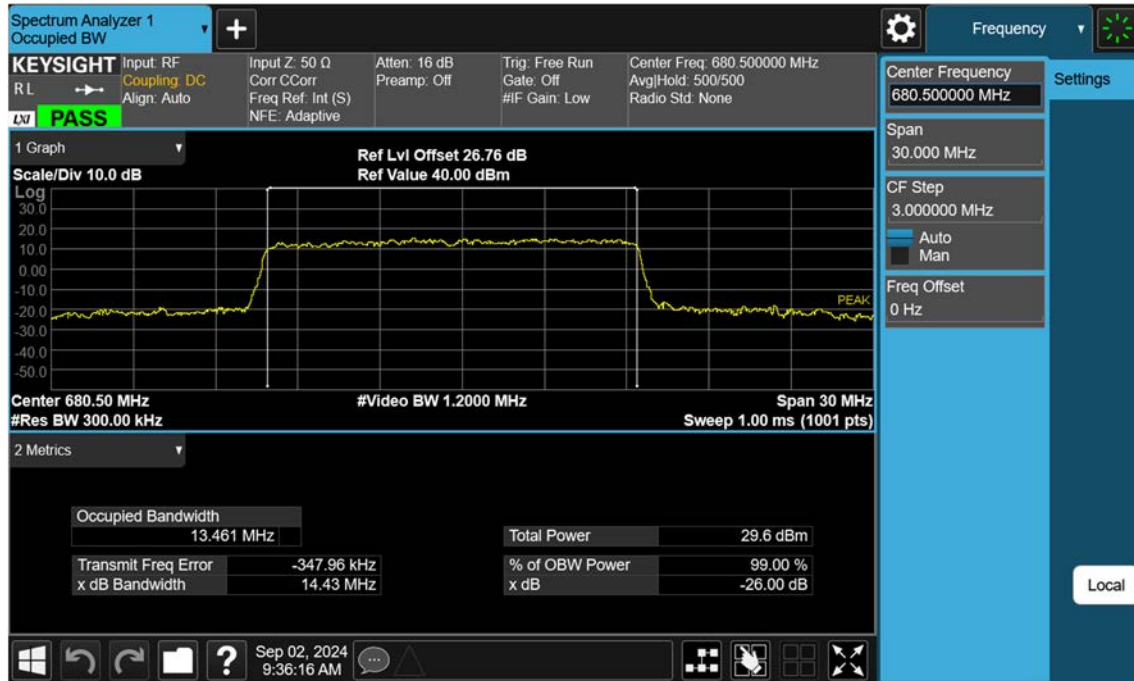


NR71_15 M_OBW_Mid_256QAM_FullRB

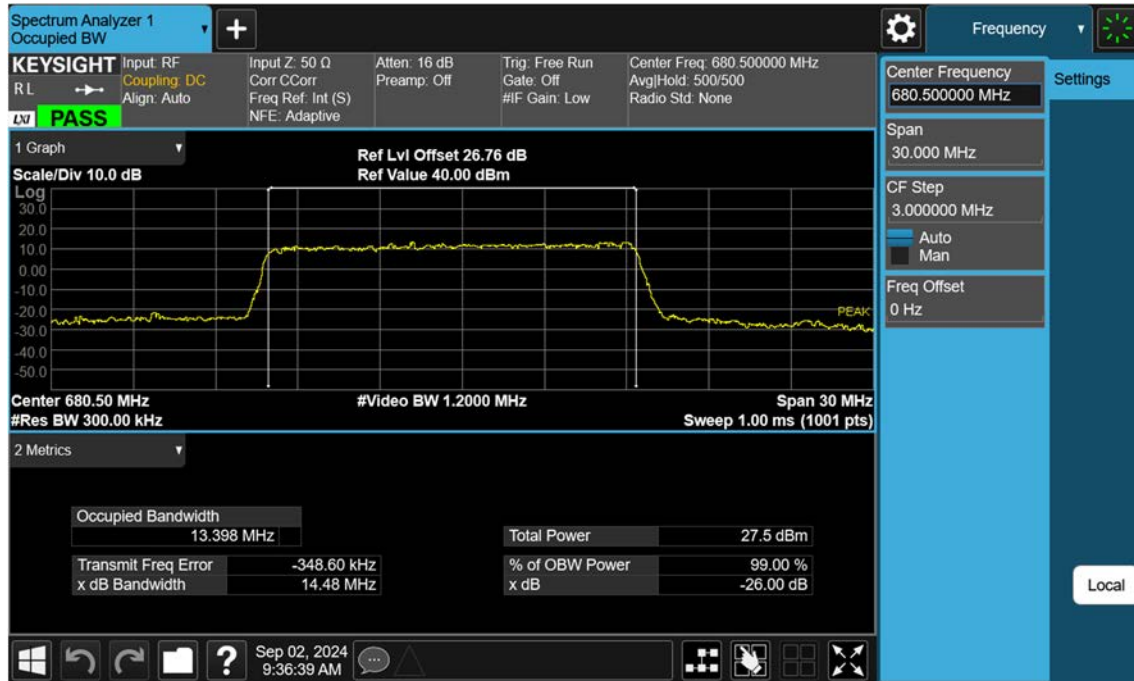

NR71_20 M_OBW_Mid_BPSK_FullRB

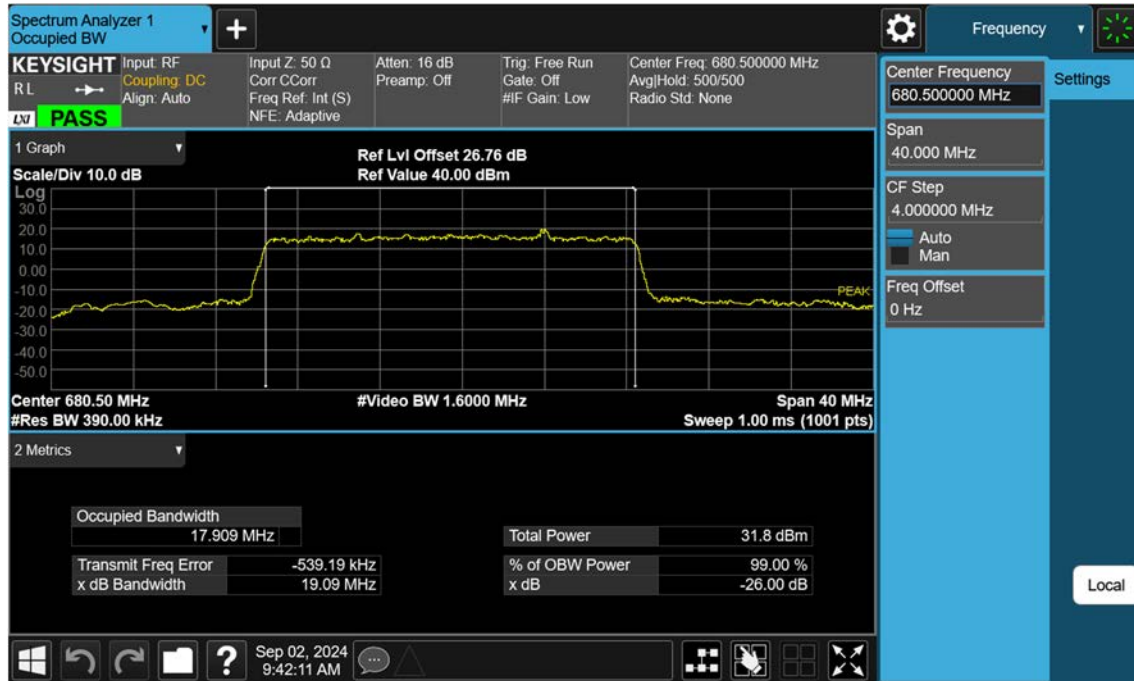


NR71_20 M_OBW_Mid_QPSK_FullRB

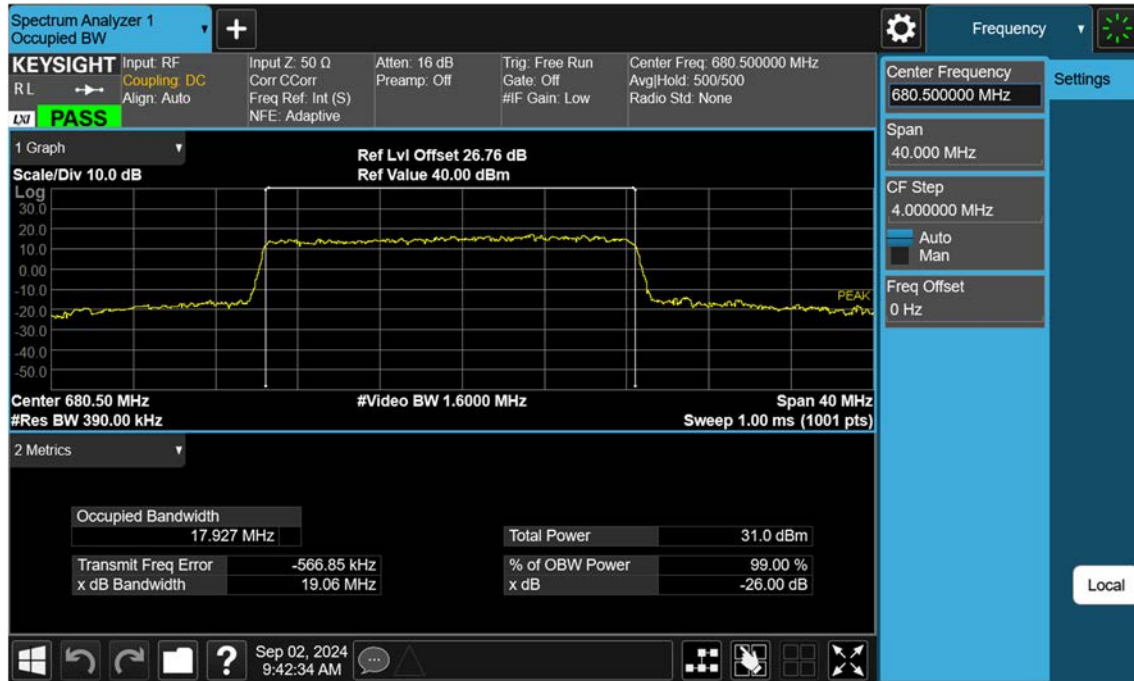


NR71_20 M_OBW_Mid_16QAM_FullRB




NR71_20 M_OBW_Mid_64QAM_FullRB

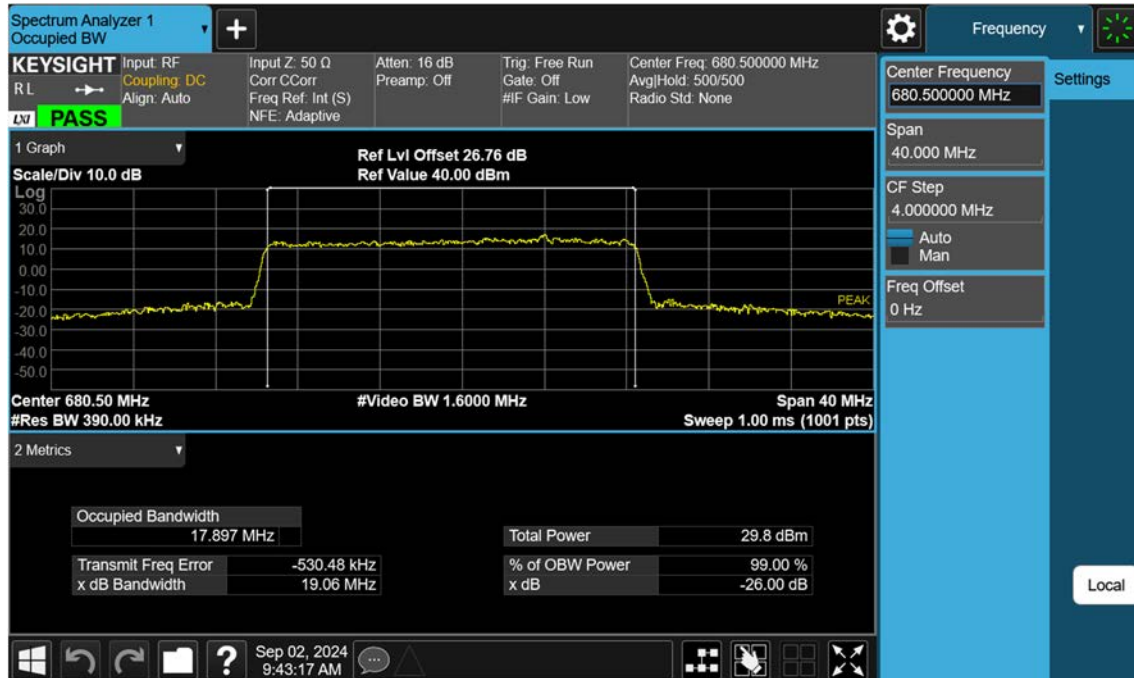


NR71_20 M_OBW_Mid_256QAM_FullRB

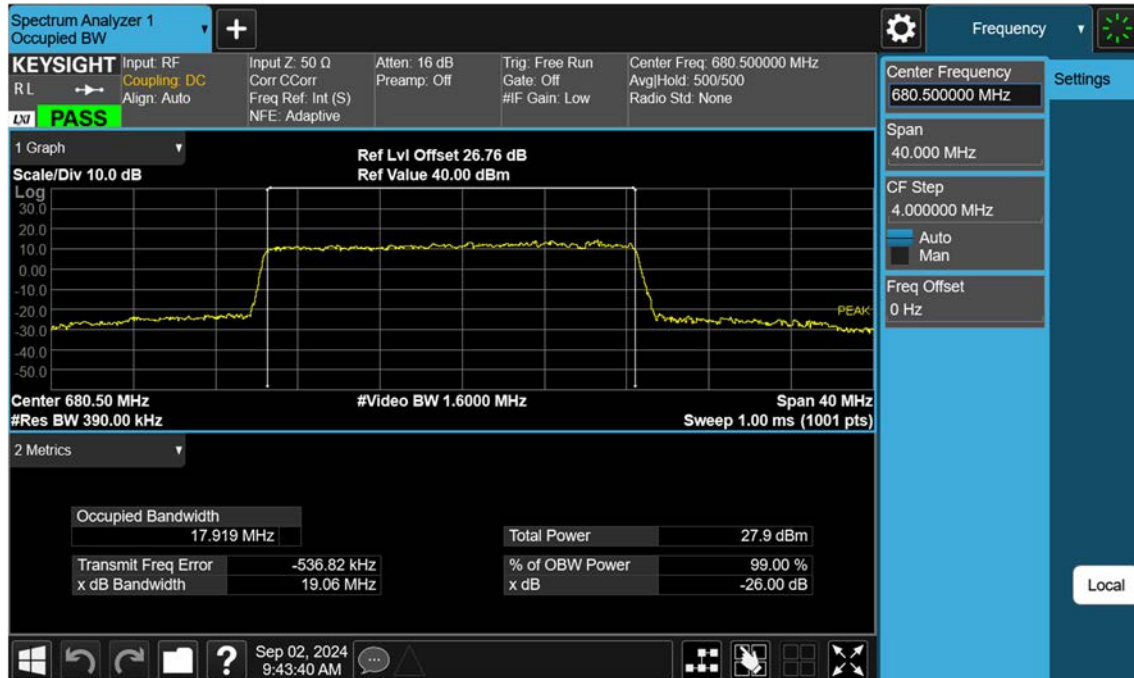


NR71_5 M_Conducted Spurious(30 M-10 G)_Low_BPSK_1RB

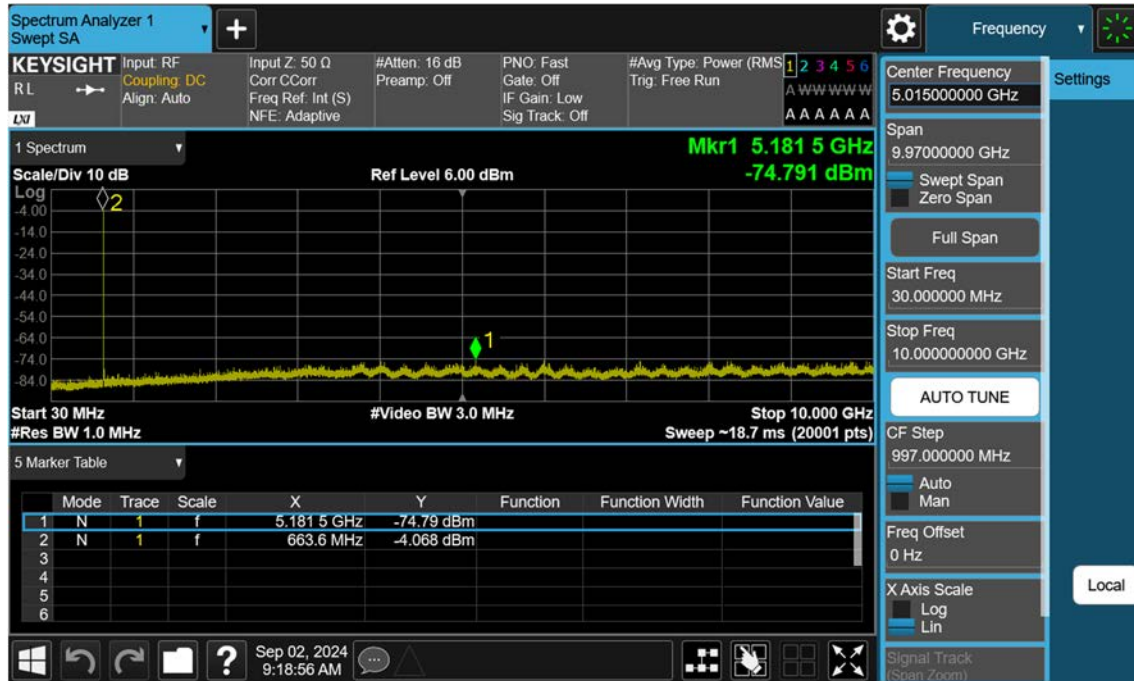


NR71_5 M_Conducted Spurious(30 M-10 G)_Mid_BPSK_1RB

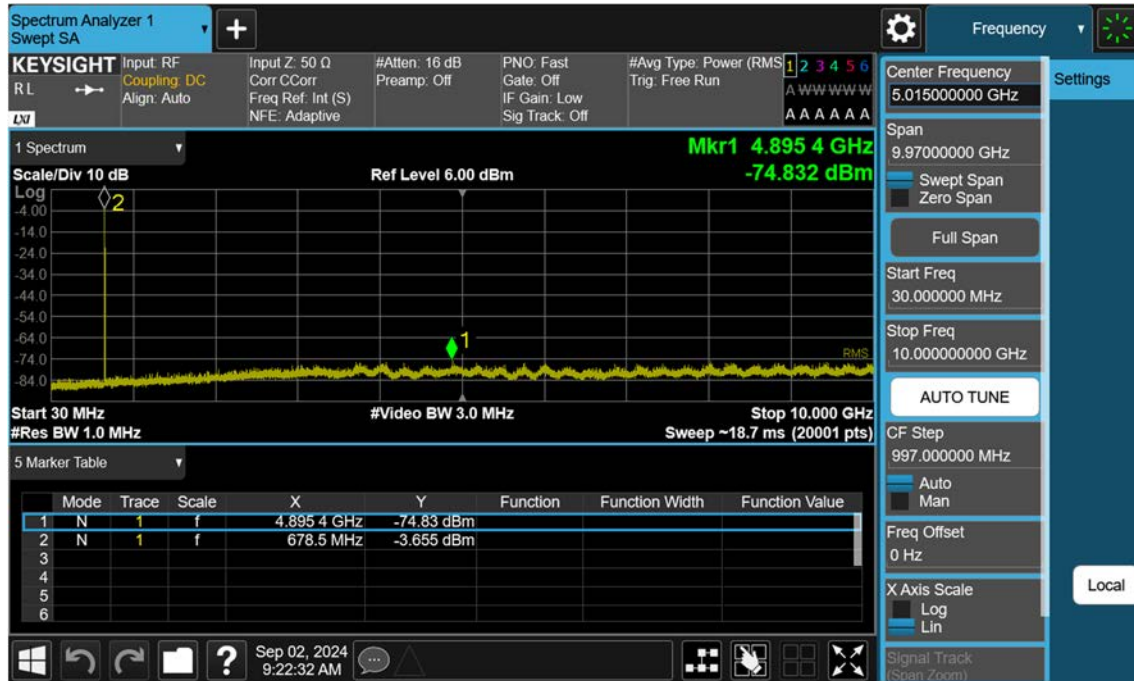


NR71_5 M_Conducted Spurious(30 M-10 G)_High_BPSK_1RB

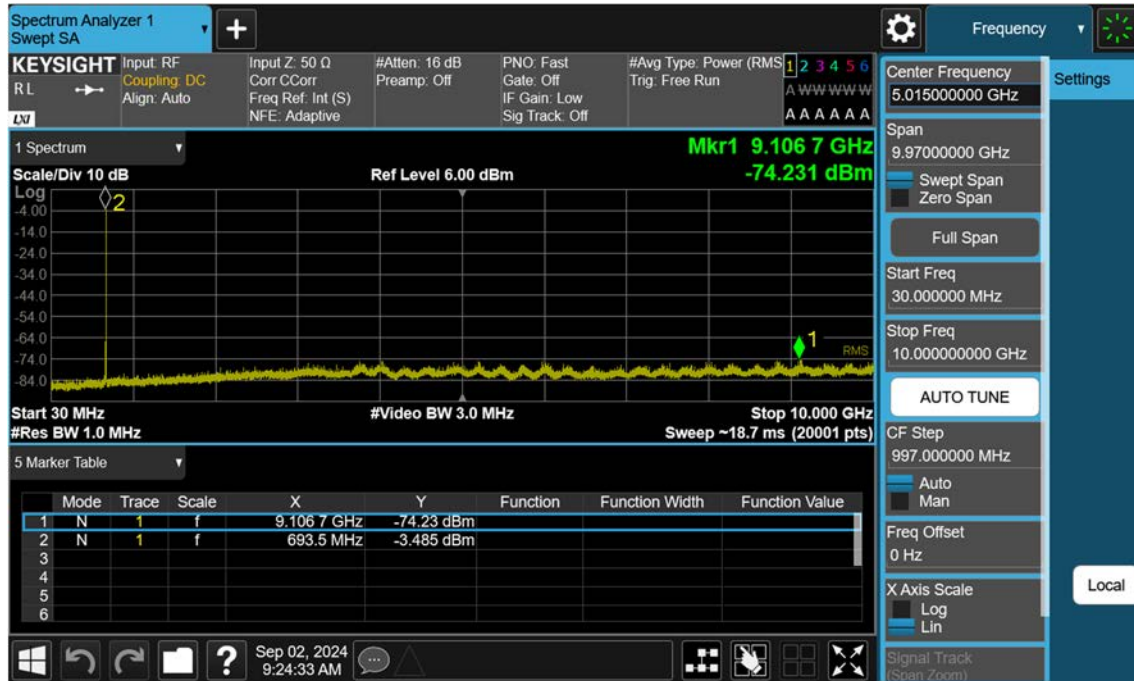


NR71_10 M_Conducted Spurious(30 M-10 G)_Low_BPSK_1RB

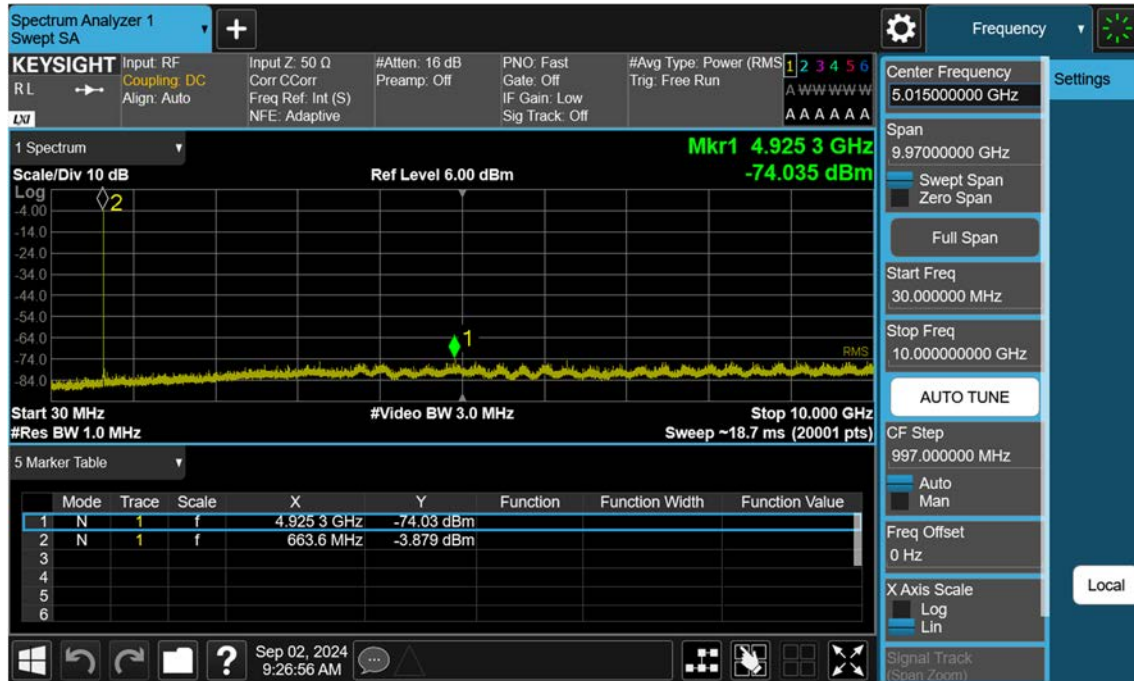


NR71_10 M_Conducted Spurious(30 M-10 G)_Mid_BPSK_1RB

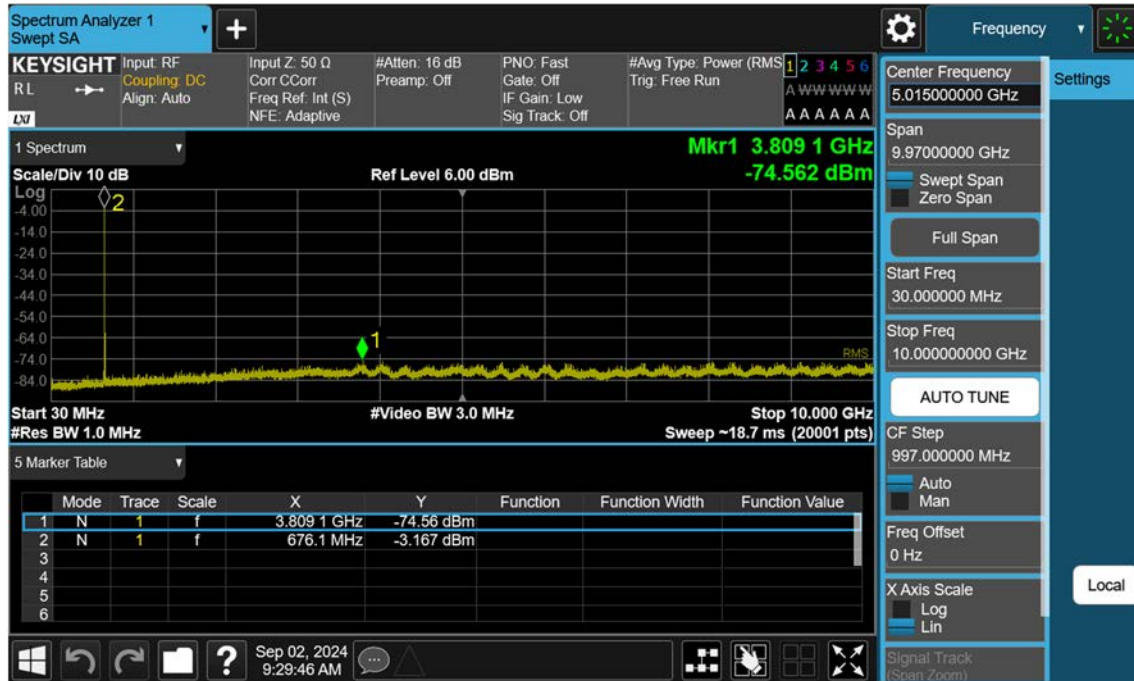


NR71_10 M_Conducted Spurious(30 M-10 G)_High_BPSK_1RB

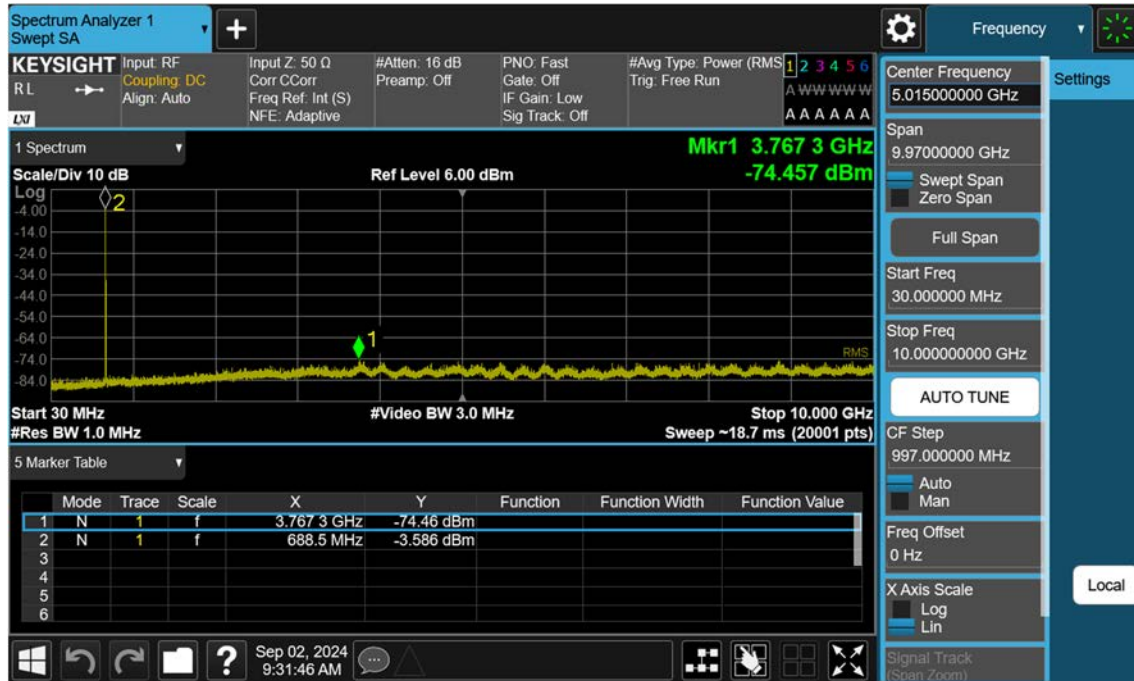


NR71_15 M_Conducted Spurious(30 M-10 G)_Low_BPSK_1RB

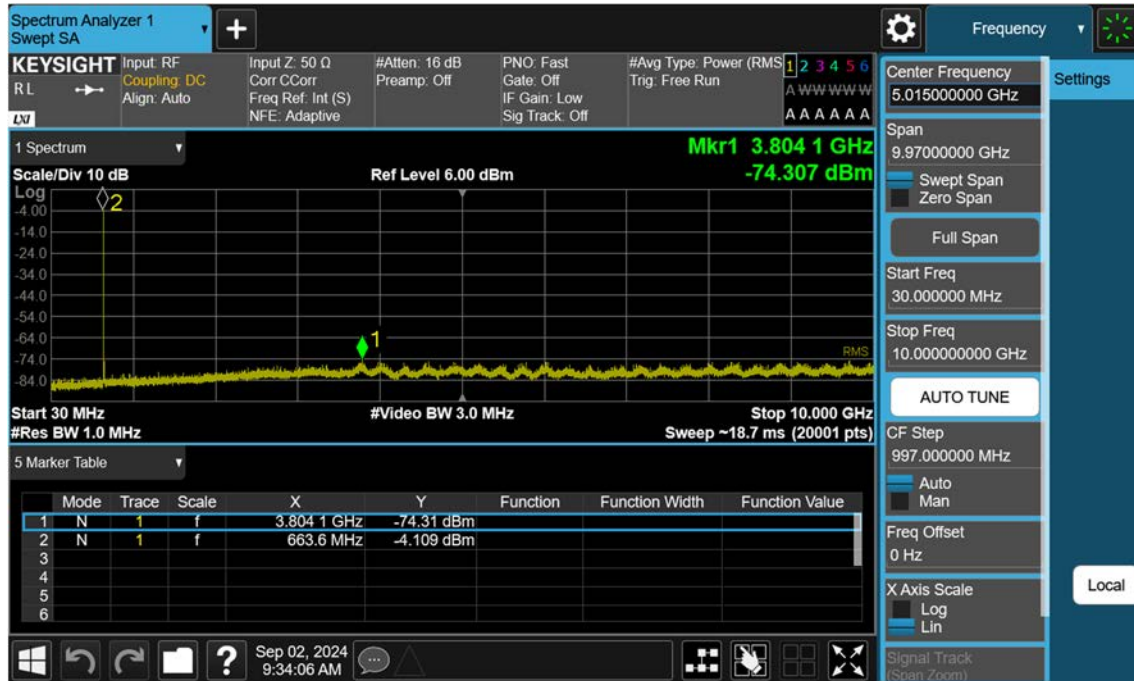


NR71_15 M_Conducted Spurious(30 M-10 G)_Mid_BPSK_1RB

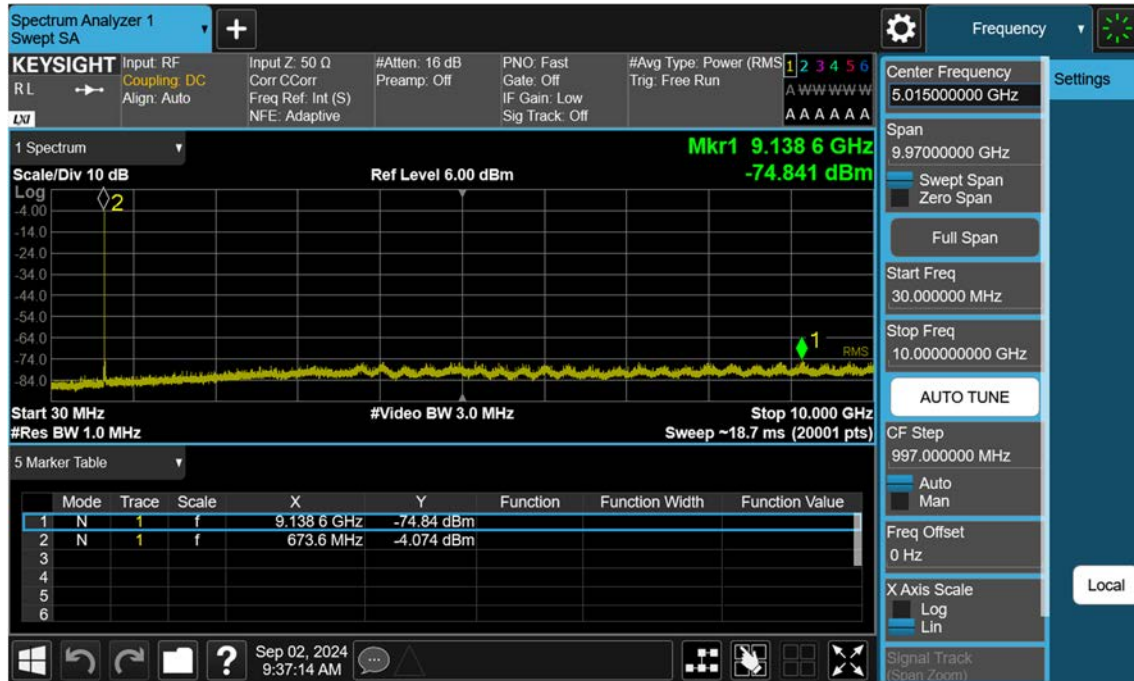


NR71_15 M_Conducted Spurious(30 M-10 G)_High_BPSK_1RB

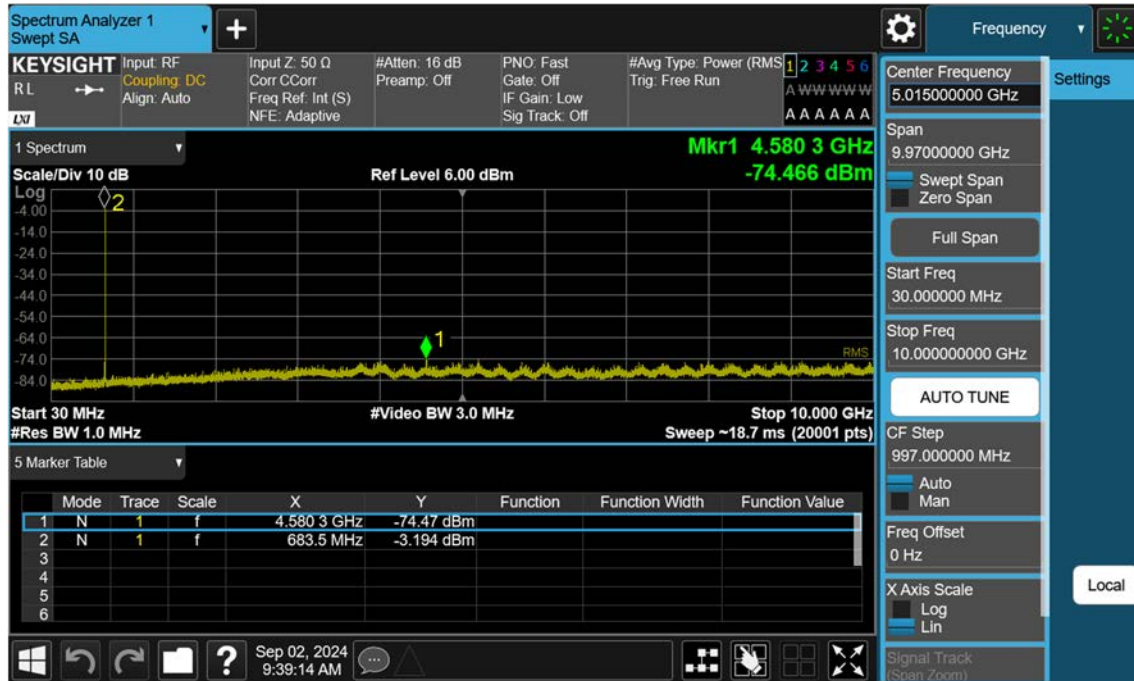


NR71_20 M_Conducted Spurious(30 M-10 G)_Low_BPSK_1RB

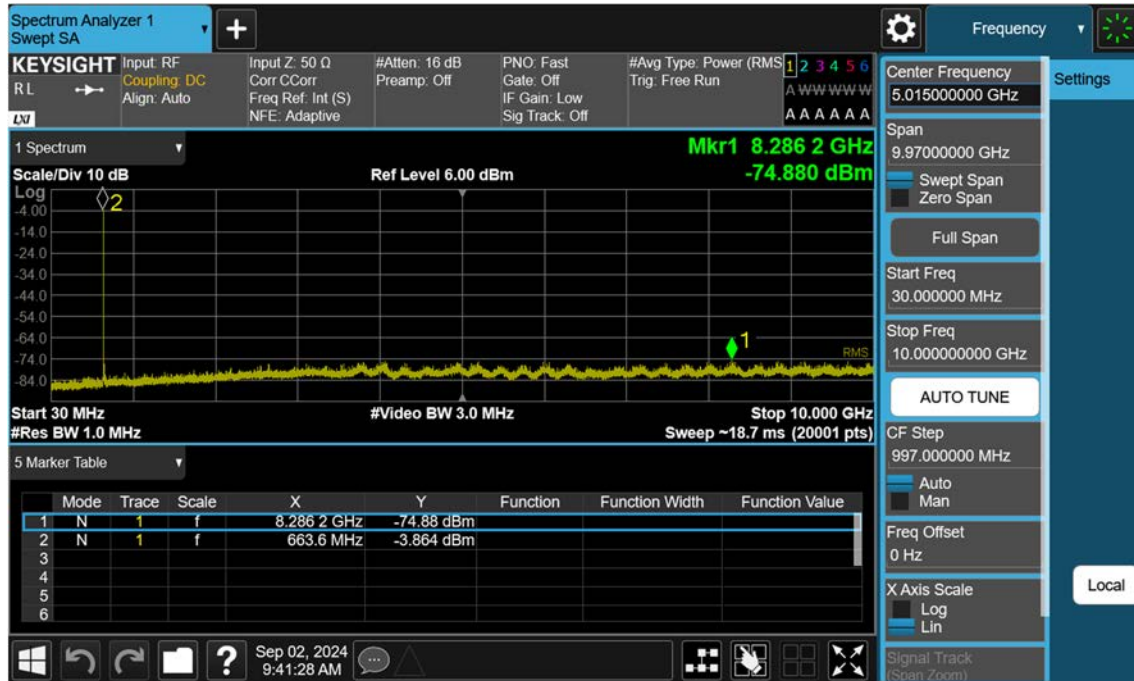

NR71_20 M_Conducted Spurious(30 M-10 G)_Mid_BPSK_1RB

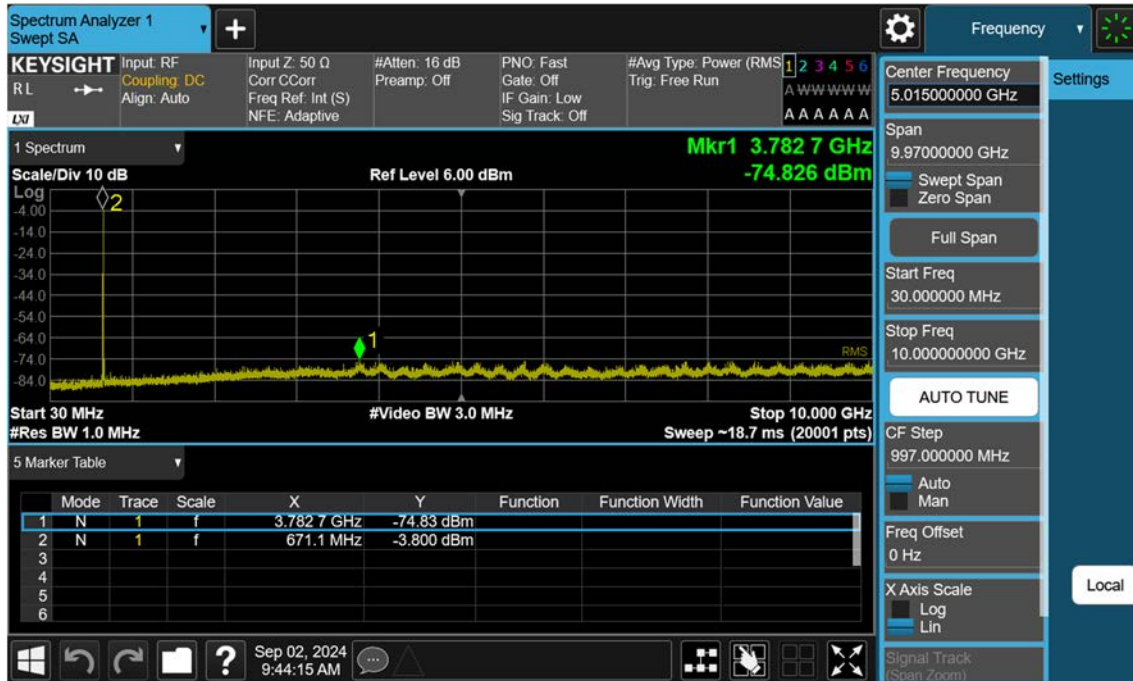


NR71_20 M_Conducted Spurious(30 M-10 G)_High_BPSK_1RB

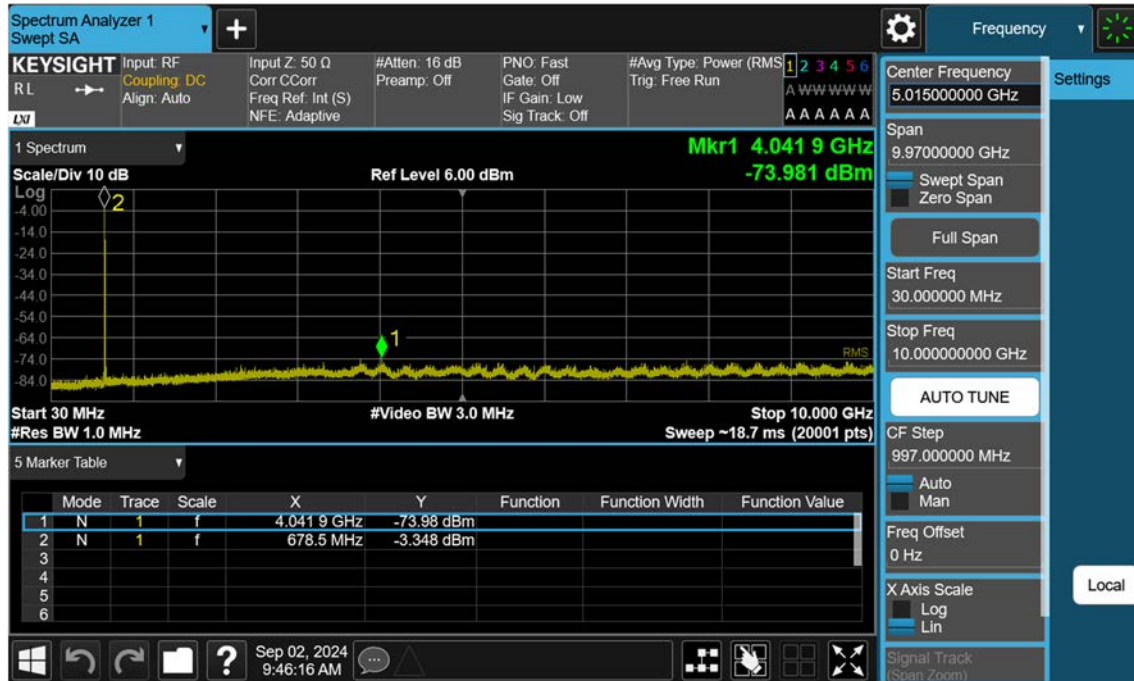

NR71_5 M_Band Edge_Low_BPSK_1RB(1)



NR71_5 M_Band Edge_Low_BPSK_1RB(2)

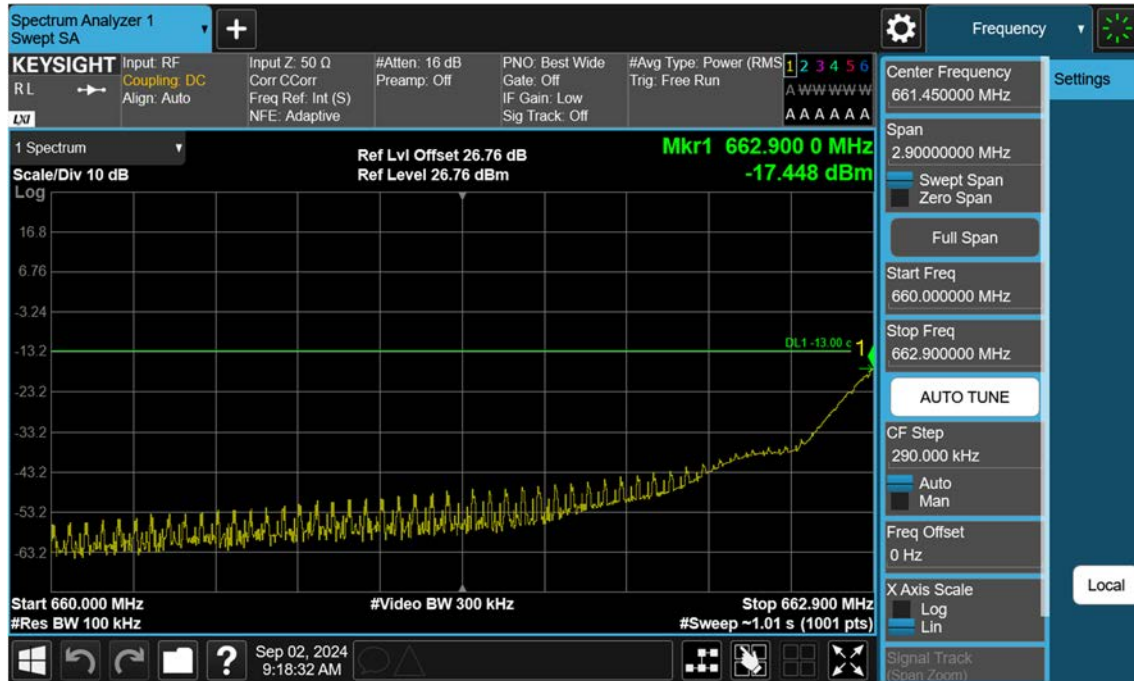

NR71_5 M_Band Edge_Low_BPSK_FullRB



NR71_5 M_Extended Band Edge_Low_BPSK_FullRB



NR71_5 M_Band Edge_High_BPSK_1RB(1)



NR71_5 M_Band Edge_High_BPSK_1RB(2)



NR71_5 M_Band Edge_High_BPSK_FullRB



NR71_5 M_Extended Band Edge_High_BPSK_FullRB



NR71_10 M_Band Edge_Low_BPSK_1RB(1)



NR71_10 M_Band Edge_Low_BPSK_1RB(2)



NR71_10 M_Band Edge_Low_BPSK_FullRB

