

Part 96 MEASUREMENT REPORT

Applicant Name:

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

09/03/2024 - 10/25/2024

Test Report Issue Date:

10/28/2024

Test Site/Location:

Element Lab. Yongin-Si, Gyeonggi-do, South Korea

Test Report Serial No.:

1M2408260064-07.A3L

FCC ID:

A3LSMS936U

APPLICANT:

Samsung Electronics Co., Ltd.

Application Type:

Certification

Model:

SM-S936U

Additional Models:

SM-S936U1

EUT Type:

Portable Handset

FCC Classification:

Citizens Band End User Devices (CBE)

FCC Rule Part(s):

96

Test Procedure(s):

ANSI C63.26-2015

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Prepared by



Reviewed by

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 1 of 118

TABLE OF CONTENTS

1.0	INTRODUCTION	5
1.1	Scope	5
1.2	Element Test Location.....	5
1.3	Test Facility / Accreditations.....	5
2.0	PRODUCT INFORMATION.....	6
2.1	Equipment Description	6
2.2	Device Capabilities.....	6
2.3	Test Configuration	6
2.4	Software and Firmware	6
2.5	EMI Suppression Device(s)/Modifications	6
3.0	DESCRIPTION OF TESTS	7
3.1	Measurement Procedure.....	7
3.2	Radiated Power and Radiated Spurious Emissions	7
4.0	MEASUREMENT UNCERTAINTY	8
5.0	TEST EQUIPMENT CALIBRATION DATA	9
6.0	SAMPLE CALCULATIONS	10
7.0	TEST RESULTS	11
7.1	Summary.....	11
7.2	Conducted Output Power Data	12
7.3	Occupied Bandwidth	17
7.4	Spurious and Harmonic Emissions at Antenna Terminal	43
7.5	Band Edge Emissions at Antenna Terminal	63
7.6	Radiated Power (EIRP)	80
7.7	Radiated Spurious Emissions Measurements	85
7.8	Frequency Stability / Temperature Variation	106
7.9	End User Device Additional Requirement (CBSD Protocol).....	109
8.0	CONCLUSION.....	118

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 2 of 118

MEASUREMENT REPORT

FCC Part 96

Antenna-F						
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
ULCA LTE Band 48	40 MHz	QPSK	3570.0 - 3680.0	0.137	21.37	37M7G7D
		16QAM	3570.0 - 3680.0	0.108	20.33	37M7W7D
	35 MHz	QPSK	3567.5 - 3682.5	0.158	21.99	32M8G7D
		16QAM	3567.5 - 3682.5	0.127	21.02	32M9W7D
	30 MHz	QPSK	3565.0 - 3685.0	0.156	21.94	27M9G7D
		16QAM	3565.0 - 3685.0	0.137	21.38	27M8W7D
	25 MHz	QPSK	3562.5 - 3687.5	0.152	21.83	23M1G7D
		16QAM	3562.5 - 3687.5	0.114	20.58	23M0W7D
LTE Band 48	20 MHz	QPSK	3560.0 - 3690.0	0.151	21.79	18M0G7D
		16QAM	3560.0 - 3690.0	0.122	20.87	17M9W7D
	15 MHz	QPSK	3557.5 - 3692.5	0.138	21.39	13M5G7D
		16QAM	3557.5 - 3692.5	0.129	21.10	13M5W7D
	10 MHz	QPSK	3555.0 - 3695.0	0.155	21.91	9M04G7D
		16QAM	3555.0 - 3695.0	0.125	20.98	9M04W7D
	5 MHz	QPSK	3552.5 - 3697.5	0.157	21.95	4M54G7D
		16QAM	3552.5 - 3697.5	0.134	21.27	4M52W7D
NR Band n48	40 MHz	$\pi/2$ BPSK	3570.0 - 3680.0	0.139	21.44	35M9G7D
		QPSK	3570.0 - 3680.0	0.140	21.45	38M1G7D
		16QAM	3570.0 - 3680.0	0.112	20.50	38M1W7D
	30 MHz	$\pi/2$ BPSK	3565.0 - 3685.0	0.147	21.68	27M0G7D
		QPSK	3565.0 - 3685.0	0.145	21.60	28M0G7D
		16QAM	3565.0 - 3685.0	0.138	21.39	28M0W7D
	20 MHz	$\pi/2$ BPSK	3560.0 - 3690.0	0.146	21.64	18M0G7D
		QPSK	3560.0 - 3690.0	0.133	21.22	18M3G7D
		16QAM	3560.0 - 3690.0	0.136	21.33	18M3W7D
	15 MHz	$\pi/2$ BPSK	3557.5 - 3692.5	0.141	21.50	12M9G7D
		QPSK	3557.5 - 3692.5	0.130	21.15	13M7G7D
		16QAM	3557.5 - 3692.5	0.123	20.89	13M7W7D
	10 MHz	$\pi/2$ BPSK	3555.0 - 3695.0	0.133	21.23	8M69G7D
		QPSK	3555.0 - 3695.0	0.118	20.72	8M66G7D
		16QAM	3555.0 - 3695.0	0.110	20.42	8M67W7D

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 3 of 118

Antenna-C						
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
NR Band n48	40 MHz	$\pi/2$ BPSK	3570.0 - 3680.0	0.125	20.96	35M9G7D
		QPSK	3570.0 - 3680.0	0.126	21.01	38M2G7D
		16QAM	3570.0 - 3680.0	0.099	19.97	38M1W7D

Antenna-I						
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
NR Band n48	40 MHz	$\pi/2$ BPSK	3570.0 - 3680.0	0.115	20.61	35M9W7D
		QPSK	3570.0 - 3680.0	0.114	20.56	38M1W7D
		16QAM	3570.0 - 3680.0	0.090	19.55	38M1W7D

Antenna-D						
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
NR Band n48	40 MHz	$\pi/2$ BPSK	3570.0 - 3680.0	0.028	14.51	36M0G7D
		QPSK	3570.0 - 3680.0	0.028	14.48	38M1G7D
		16QAM	3570.0 - 3680.0	0.028	14.51	36M0W7D

EUT Overview

Note: EIRP levels shown in the table above are measured over the full channel bandwidth. These values will appear on the Grant of Authorization.

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 4 of 118

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

1.2 Element Test Location

These measurement tests were conducted at the Element Suwon Laboratory located at 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do, 16954, South Korea. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology Suwon, Ltd. located in Yongin-si, Gyeonggi-do, 16954, South Korea.

- Element Materials Technology Suwon, Ltd. is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation(A2LA) with Certificate number 2041.04 for Specific Absorption Rate (SAR), and Electromagnetic Compatibility (EMC) & Telecommunications testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Materials Technology Suwon, Ltd. facility is accredited, designated, and recognized in accordance with the provision of Radio Wave Act and International Standard ISO/IEC 17025:2017 under the National Radio Research Agency.
 - Designation Number / CABID: KR0169
 - Test Firm Registration Number of FCC: 417945
 - Test Firm Registration Number of ISSED: 26168

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 5 of 118

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMS936U**. The test data contained in this report pertains only to the emissions due to the EUT's LTE Band 48 operation in the CBRS band. Per FCC Part 96, this device is evaluated as a Citizens Band End User Devices (CBE).

Test Device Serial No.: 0703R, 1272M, 1400M, 1313M, 1316M, 1930M, 2327M, 2330M, 2358M

2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR (FR1 and FR2), 802.11b/g/n/ac/ax/be WLAN, 802.11a/n/ac/ax/be UNII (5GHz and 6GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer

This device uses a tuner circuit that dynamically updates the antenna impedance parameters to optimize antenna performance for certain bands and modes of operation. The tuner for this device was set to simulate a "free space" condition where the transmit antenna is matched to the medium into which it is transmitting and, thus, the power is at its maximum level.

2.3 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.4 Software and Firmware

Testing was performed on device(s) using software/firmware version S936USQU0AXHJ installed on the EUT.

2.5 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 6 of 118

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The measurement procedures described in the “American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services” (ANSI C63.26-2015) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI C63.26-2015. For emissions below 1GHz, a half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]};$$

where P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

For radiated spurious emissions measurements, the field strength conversion method is used per the formulas in Section 5.2.7 of ANSI C63.26-2015. Field Strength (EIRP) is calculated using the following formulas:

$$E_{\text{[dB}\mu\text{V/m]}} = \text{Measured amplitude level}_{\text{[dBm]}} + 107 + \text{Cable Loss}_{\text{[dB]}} + \text{Antenna Factor}_{\text{[dB/m]}}$$

And

$$\text{EIRP}_{\text{[dBm]}} = E_{\text{[dB}\mu\text{V/m]}} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015.

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 7 of 118

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.95
Radiated Disturbance (<1GHz)	4.10
Radiated Disturbance (>1GHz)	4.82
Radiated Disturbance (>18GHz)	4.96

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 8 of 118

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	N9030A	PXA Signal Analyzer	2024-07-08	Annual	2025-07-08	
Anritsu	S820E	Cable and Antenna Analyzer	2024-07-09	Annual	2025-07-08	1839097
Anritsu	MA24106A	USB Power Sensor	2024-07-09	Annual	2025-07-08	1244512
Anritsu	MT8000A	Radio Communication Test Station	2024-09-05	Annual	2025-09-04	6272337405
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	2024-10-07	Biennial	2026-10-06	10160045
Espec	SH-242	Environmental Chamber	2024-07-09	Annual	2025-07-08	93011064
Fairview Microwave	FM2CP1122-10	2.92mm Directional Coupler	2024-07-09	Annual	2025-07-08	1946
Keysight Technologies	N9030B	PXA Signal Analyzer	2024-07-08	Annual	2025-07-08	MY57143278
Mini-Circuits	BW-N10W5+	Attenuator	2024-04-08	Annual	2025-04-07	TEMPNO.01-151
Mini-Circuits	BW-N10W5+	Attenuator	2024-04-08	Annual	2025-04-07	TEMPNO.01-150
NARDA	180-442A-KF	Horn Antenna (small)	2024-01-16	Annual	2025-01-15	T058701-03
Rohde & Schwarz	SMB100A03	Signal Generator	2024-01-11	Annual	2025-01-10	182487
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	2024-01-11	Annual	2025-01-10	171075
Rohde & Schwarz	FSW43	Signal and Spectrum Analyzer	2024-01-11	Annual	2025-01-10	101955
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2024-01-11	Annual	2025-01-10	102131
Schwarzbeck	VULB9162	Broadband TRILOG Antenna	2023-06-01	Biennial	2025-05-31	9162-217
Sunol	DRH-118	Horn Antenna	2023-01-26	Biennial	2025-01-25	A060215

Table 5-1. Test Equipment

Notes:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 9 of 118

6.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (7250 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80) = 50.3 dBc.

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 10 of 118

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMS936U
 FCC Classification: Citizens Band End User Devices (CBE)
 Mode(s): LTE/NR/ULCA

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Transmitter Conducted Output Power	2.1048(a), 2.1048(c)	N/A	PASS	Section 7.2
	Occupied Bandwidth	2.1049(h)	N/A	PASS	Section 7.3
	Conducted Band Edge / Spurious Emissions (NR Band n77)	2.1051, 27.53(j), 27.53(n)	≤ -13 dBm / MHz	PASS	Sections 7.4, 7.5
	Peak-to-Average Ratio (NR Band n77)	27.50(j)(4), 27.50(k)(4)	≤ 13 dB	PASS	Section 7.6
	Frequency Stability	2.1055, 27.54	Fundamental emissions stay within authorized frequency block.	PASS	Section 7.9
RADIATED	Effective Radiated Power / Equivalent Isotropic Radiated Power (NR Band n77)	27.50(j)(3), 27.50(k)(3)	≤ 1 Watt EIRP	PASS	Section 7.7
	Radiated Spurious Emissions (NR Band n77)	2.1053, 27.53(j), 27.53(n)	≤ -13 dBm / MHz	PASS	Section 7.8

* The only transmitter output conducted powers included in this report are those where the Pmax value, per the tune-up document, is higher than any of the DSI power levels. For the remaining conducted power measurements, see the RF Exposure Report.

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is EMC Software Tool v1.2.2.

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 11 of 118

7.2 Conducted Output Power Data

Test Overview

The EUT is set up to transmit at maximum power for LTE. All power levels are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

A-MPR is implemented in this device per the A-MPR specification in 3GPP TS 36.101. The conducted powers are shown herein to cover the different A-MPR levels specified in the standard. Measurement equipment was set up with triggering/gating on the spectrum analyzer such that powers were measured only during the on-time of the signal.

Test Procedure Used

ANSI C63.26-2015 – Section 5.2

Test Settings

1. Span = 2 x OBW to 3 x OBW
2. RBW = 1% to 5% of the OBW
3. Number of measurement points in sweep $\geq 2 \times \text{span} / \text{RBW}$
4. Sweep = auto-couple (less than transmission burst duration)
5. Detector = RMS (power)
6. Trigger was set to enable power measurements only on full power bursts
7. Trace was allowed to stabilize
8. Spectrum analyzer's "Channel Power" function was used to compute the power by integrating the spectrum across the OBW of the signal

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

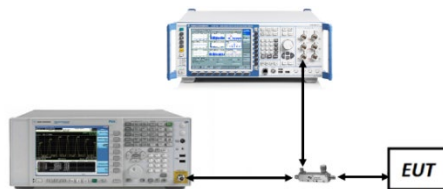


Figure 7-1. Test Instrument & Measurement Setup

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 12 of 118

Test Notes

1. A-MPR was only applied for test purposes to the 2CC case since the 1CC case was compliant for all testing at max power.
2. A-MPR was verified to comply with the "CA_NS_10" specification in the 3GPP TS 36.101 standard by setting the MCC to a U.S. code and the MNC to a U.S. carrier supporting LTE B48 operation.
3. 256QAM operations does not employ A-MPR.
4. Conducted power measurements were evaluated using various combinations of RB size, RB offset, modulation, and channel bandwidth. Channel bandwidth data is shown in the tables below based only on the channel bandwidths that were supported in this device.
5. All other conducted power measurements are contained in the RF exposure report for this filing.
6. Conducted power was found to reduce for the higher order QAM modulations when compared to 16QAM. Due to this trend, only the worst-case QAM (16QAM) powers are included in this section.

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 13 of 118

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	55340	3560.0	1 / 49	23.32
		55990	3625.0	1 / 1	23.39
		56640	3690.0	1 / 25	23.48
	16-QAM	55990	3625.0	1 / 1	22.67
15 MHz	QPSK	55315	3557.5	1 / 1	22.91
		55990	3625.0	1 / 1	23.22
		56665	3692.5	1 / 19	23.37
	16-QAM	56665	3692.5	1 / 19	22.16
10 MHz	QPSK	55290	3555.0	1 / 22	23.44
		55990	3625.0	1 / 1	23.03
		56690	3695.0	1 / 1	23.43
	16-QAM	56690	3695.0	1 / 1	22.18
5 MHz	QPSK	55265	3552.5	1 / 1	23.48
		55990	3625.0	1 / 9	23.10
		56715	3697.5	1 / 1	23.36
	16-QAM	55265	3552.5	1 / 1	22.03

Table 7-2. Conducted Power Output Data (LTE Band 48 – Ant F)

Bandwidth	Modulation	PCC			SCC			Conducted Power [dBm]
		Bandwidth [MHz]	Frequency [MHz]	RB / Offset	Bandwidth [MHz]	Frequency [MHz]	RB / Offset	
40 MHz	QPSK	20	3560.0	1 / 99	20	3579.8	1 / 0	22.23
		20	3625.0	1 / 99	20	3644.8	1 / 0	23.23
		20	3690.0	1 / 0	20	3670.2	1 / 99	21.78
	16-QAM	20	3625.0	1 / 99	20	3644.8	1 / 0	21.91
35 MHz	QPSK	20	3560.0	1 / 99	15	3577.1	1 / 0	23.43
		20	3625.0	1 / 99	15	3642.1	1 / 0	23.39
		20	3690.0	1 / 0	15	3672.9	1 / 74	23.49
	16-QAM	20	3560.0	1 / 99	15	3577.1	1 / 0	22.47
30 MHz	QPSK	20	3560.0	1 / 99	10	3574.4	1 / 0	23.38
		20	3625.0	1 / 99	10	3639.4	1 / 0	23.27
		20	3690.0	1 / 0	10	3675.6	1 / 49	23.43
	16-QAM	20	3690.0	1 / 0	10	3675.6	1 / 49	23.10
25 MHz	QPSK	20	3560.0	1 / 99	5	3571.7	1 / 0	22.38
		20	3625.0	1 / 99	5	3636.7	1 / 0	23.12
		20	3690.0	1 / 0	5	3678.3	1 / 24	23.32
	16-QAM	20	3690.0	1 / 0	5	3678.3	1 / 24	22.30

Table 7-3. Conducted Power Output Data (ULCA LB48 – Ant F)

Test Case	NS	MCC	MNC	Channel BW [MHz]	PCC			SCC			A-MPR [dB]	Modulation	MPR [dB]	Maximum Target Output Power [dBm]	A-MPR Measured Power [dBm]
					Channel Frequency [MHz]	RB Size	RB Offset	Channel Frequency [MHz]	RB Size	RB Offset					
1	NS_10	310	910	20 + 20	3560	100	0	3579.8	100	0	≤ 11	QPSK	0	22.50	12.94
2				20 + 20	3560	1	99	3579.8	1	0	≤ 11	16-QAM	1	21.50	12.99
3				20 + 20	3605.1	100	0	3624.9	100	0	≤ 4.5	QPSK	0	22.50	19.46
4				20 + 20	3605.1	1	99	3624.9	1	0	≤ 4.5	16-QAM	1	21.50	19.55
5				20 + 20	3670.1	100	0	3689.9	100	0	≤ 11	QPSK	0	22.50	19.72
6				20 + 20	3670.1	1	99	3689.9	1	0	≤ 11	16-QAM	1	21.50	19.74
				20 + 20	3605.1	1	99	3624.9	1	0	≤ 4.5	QPSK	0	22.50	22.67
				20 + 20	3605.1	1	99	3624.9	1	0	≤ 4.5	16-QAM	1	21.50	22.43
				20 + 20	3670.1	100	0	3689.9	100	0	≤ 11	QPSK	0	22.50	13.02
				20 + 20	3670.1	100	0	3689.9	100	0	≤ 11	16-QAM	1	21.50	13.07
				20 + 20	3670.1	1	99	3689.9	1	0	≤ 11	QPSK	0	22.50	19.18
				20 + 20	3670.1	1	99	3689.9	1	0	≤ 11	16-QAM	1	21.50	19.49

Table 7-4. A-MPR Conducted Power Output Data (ULCA LB48 – Ant F)

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset		Page 14 of 118

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
40 MHz	$\pi/2$ BPSK	638000	3570.0	1 / 104	23.36
		641666	3625.0	1 / 53	23.46
		645332	3680.0	1 / 1	23.05
	QPSK	638000	3570.0	1 / 104	23.40
		641666	3625.0	1 / 53	23.46
		645332	3680.0	1 / 1	23.03
	16-QAM	641666	3625.0	1 / 53	23.17
30 MHz	$\pi/2$ BPSK	637666	3565.0	1 / 76	23.39
		641666	3625.0	1 / 39	23.49
		645666	3685.0	1 / 39	23.04
	QPSK	637666	3565.0	1 / 76	23.48
		641666	3625.0	1 / 1	23.46
		645666	3685.0	1 / 39	23.10
	16-QAM	641666	3625.0	1 / 39	22.94
20 MHz	$\pi/2$ BPSK	637334	3560.0	1 / 1	22.16
		641666	3625.0	1 / 49	23.45
		646000	3690.0	1 / 1	23.01
	QPSK	637334	3560.0	1 / 1	22.23
		641666	3625.0	1 / 25	23.46
		646000	3690.0	1 / 1	22.96
	16-QAM	641666	3625.0	1 / 25	23.09
15 MHz	$\pi/2$ BPSK	637166	3557.5	1 / 1	22.18
		641666	3625.0	1 / 1	23.28
		646166	3692.5	1 / 19	22.86
	QPSK	637166	3557.5	1 / 1	22.11
		641666	3625.0	1 / 36	23.22
		646166	3692.5	1 / 36	22.97
	16-QAM	641666	3625.0	1 / 1	22.90
10 MHz	$\pi/2$ BPSK	637000	3555.0	1 / 1	22.31
		641666	3625.0	1 / 12	23.03
		646332	3695.0	1 / 12	22.59
	QPSK	637000	3555.0	1 / 1	22.28
		641666	3625.0	1 / 1	22.95
		646332	3695.0	1 / 12	22.51
	16-QAM	641666	3625.0	1 / 12	22.43

Table 7-5. Conducted Power Output Data (NR Band n48 – Ant F)

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
40 MHz	$\pi/2$ BPSK	638000	3570.0	1 / 104	19.91
		641666	3625.0	1 / 1	20.22
		645332	3680.0	1 / 53	19.45
	QPSK	638000	3570.0	1 / 104	20.06
		641666	3625.0	1 / 1	20.31
		645332	3680.0	1 / 1	19.30
	16-QAM	641666	3625.0	1 / 1	19.14

Table 7-6. Conducted Power Output Data (NR Band n48 – Ant C)

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 15 of 118

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
40 MHz	π/2 BPSK	638000	3570.0	1 / 104	23.16
		641666	3625.0	1 / 1	23.25
		645332	3680.0	1 / 1	22.98
	QPSK	638000	3570.0	1 / 104	23.18
		641666	3625.0	1 / 1	23.40
		645332	3680.0	1 / 53	22.98
	16-QAM	638000	3570.0	1 / 104	22.32

Table 7-7. Conducted Power Output Data (NR Band n48 – Ant I)

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
40 MHz	π/2 BPSK	638000	3570.0	1 / 104	18.59
		641666	3625.0	1 / 1	19.13
		645332	3680.0	1 / 53	18.47
	QPSK	638000	3570.0	1 / 104	18.77
		641666	3625.0	1 / 1	18.98
		645332	3680.0	1 / 53	18.48
	16-QAM	641666	3625.0	1 / 1	17.79

Table 7-8. Conducted Power Output Data (NR Band n48 – Ant D)

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 16 of 118

7.3 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 – Section 5.4.4

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

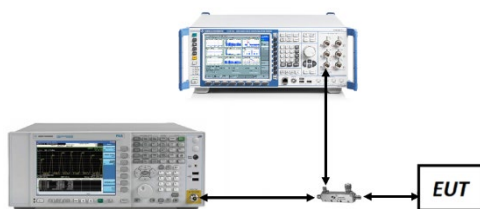


Figure 7-2. Test Instrument & Measurement Setup

Test Notes

None


FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 17 of 118

Mode	Bandwidth	Modulation	OBW [MHz]
LTE-B48	20 MHz	QPSK	18.01
		16QAM	17.94
	15 MHz	QPSK	13.49
		16QAM	13.51
	10 MHz	QPSK	9.04
		16QAM	9.04
	5 MHz	QPSK	4.54
		16QAM	4.52
LTE-B48 ULCA	20+20MHz	QPSK	37.66
		16QAM	37.66
	20+15MHz	QPSK	32.77
		16QAM	32.86
	20+10MHz	QPSK	27.87
		16QAM	27.76
	20+5MHz	QPSK	23.05
		16QAM	22.96


Table 7-9. Occupied Bandwidth Test Results – LTE Band 48 – Ant F

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 18 of 118

LTE Band 48 – Ant F

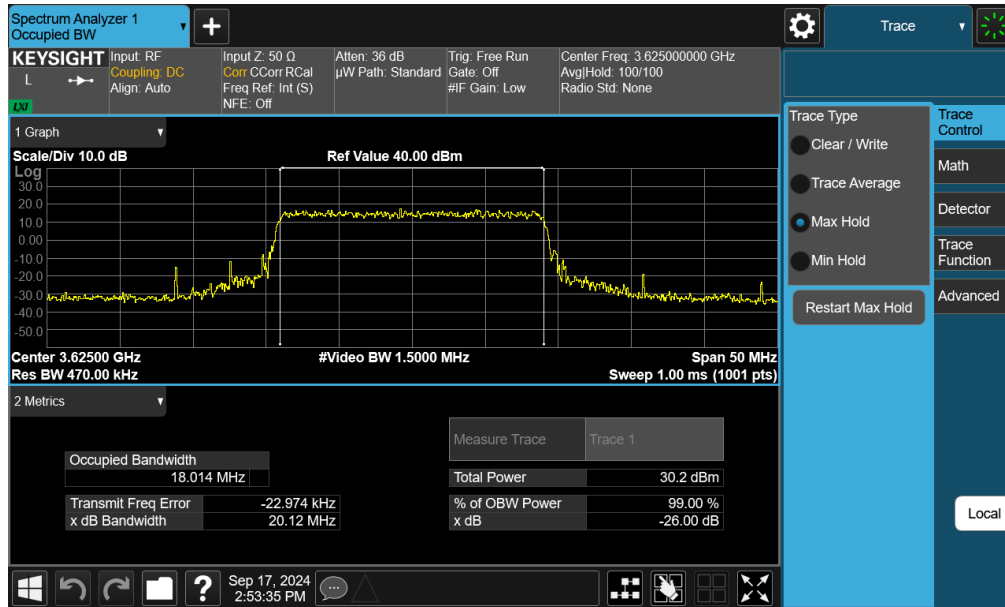


Plot 7-1. Occupied Bandwidth Plot (LTE Band 48 - 20MHz QPSK - Full RB Configuration - Ant F)

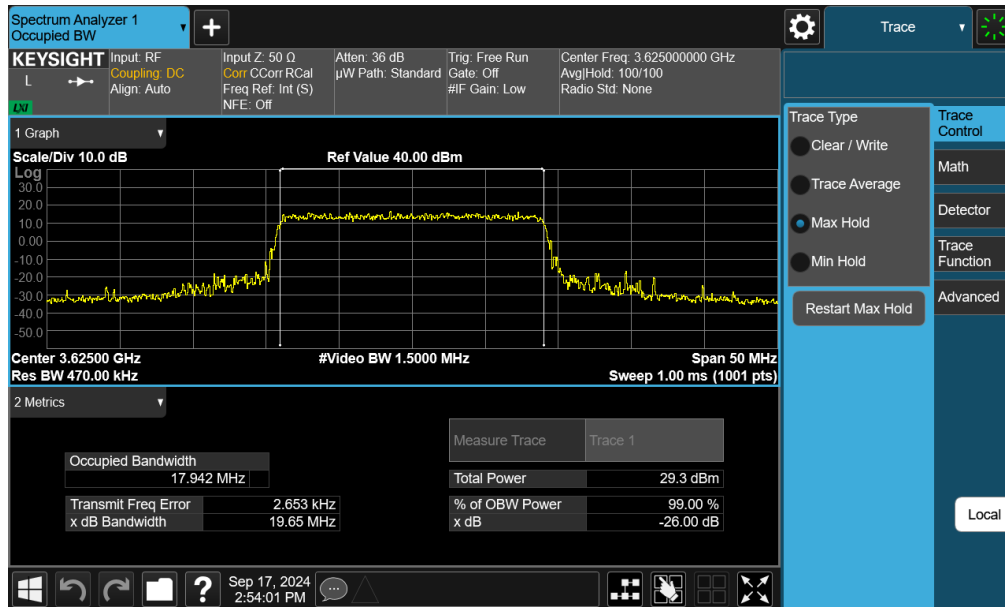


Plot 7-2. Occupied Bandwidth Plot (LTE Band 48 - 20MHz 16-QAM - Full RB Configuration - Ant F)

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 19 of 118

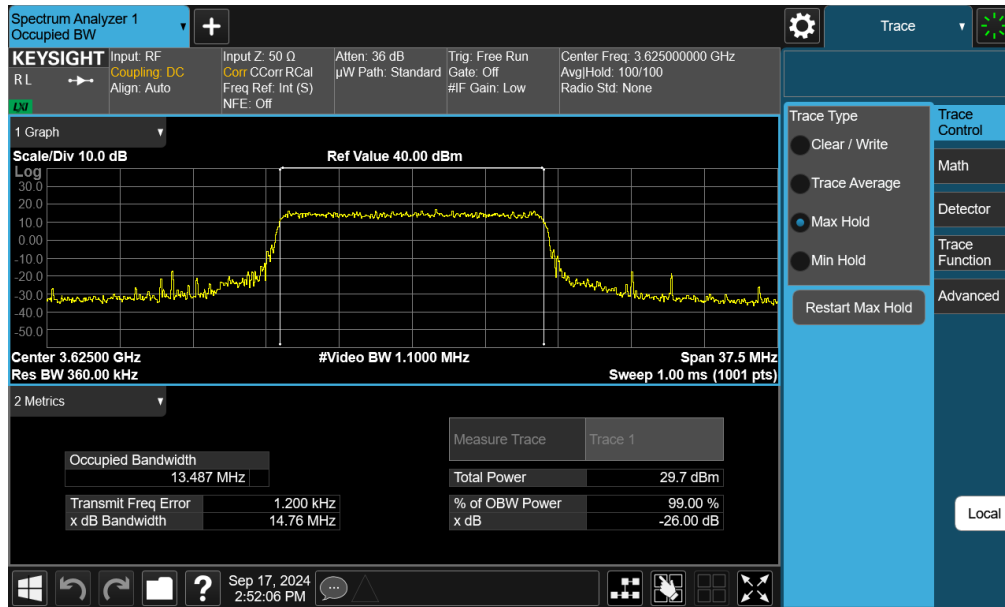


Plot 7-3. Occupied Bandwidth Plot (LTE Band 48 - 15MHz QPSK - Full RB Configuration - Ant F)

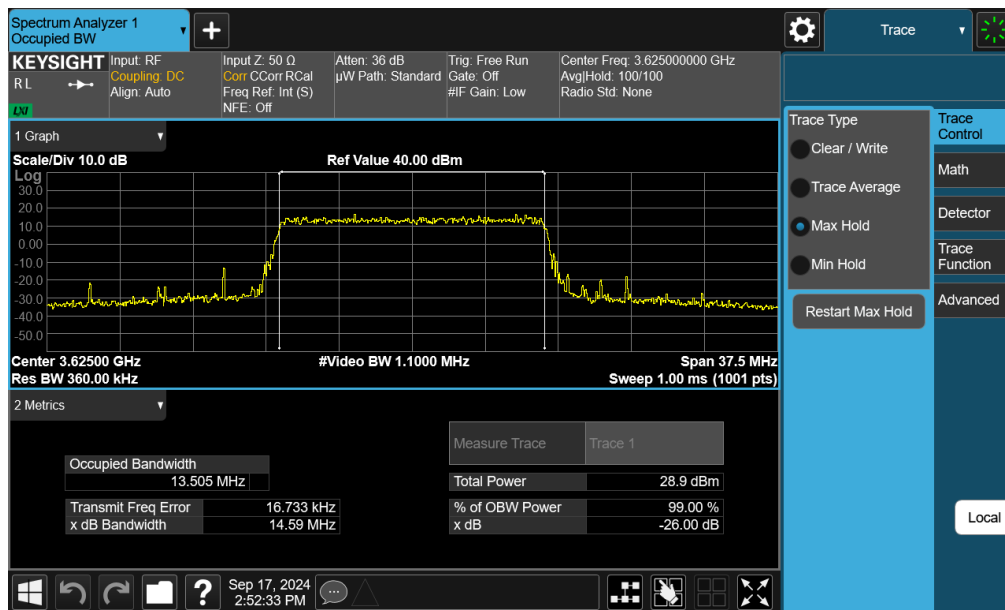

Plot 7-4. Occupied Bandwidth Plot (LTE Band 48 - 15MHz 16-QAM - Full RB Configuration - Ant F)

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 20 of 118


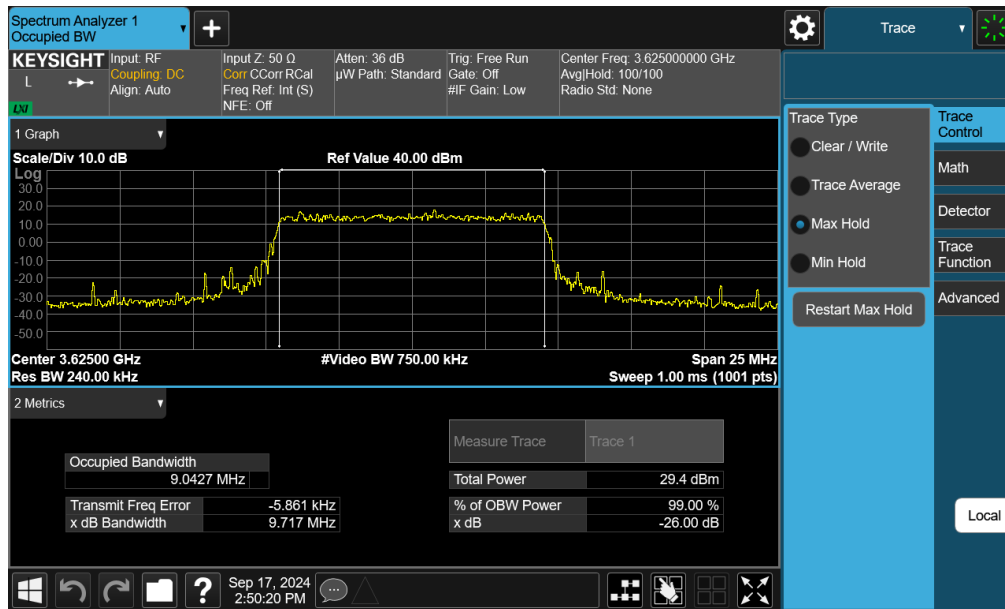


Plot 7-5. Occupied Bandwidth Plot (LTE Band 48 - 10MHz QPSK - Full RB Configuration - Ant F)




Plot 7-6. Occupied Bandwidth Plot (LTE Band 48 - 10MHz 16-QAM - Full RB Configuration - Ant F)

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 21 of 118

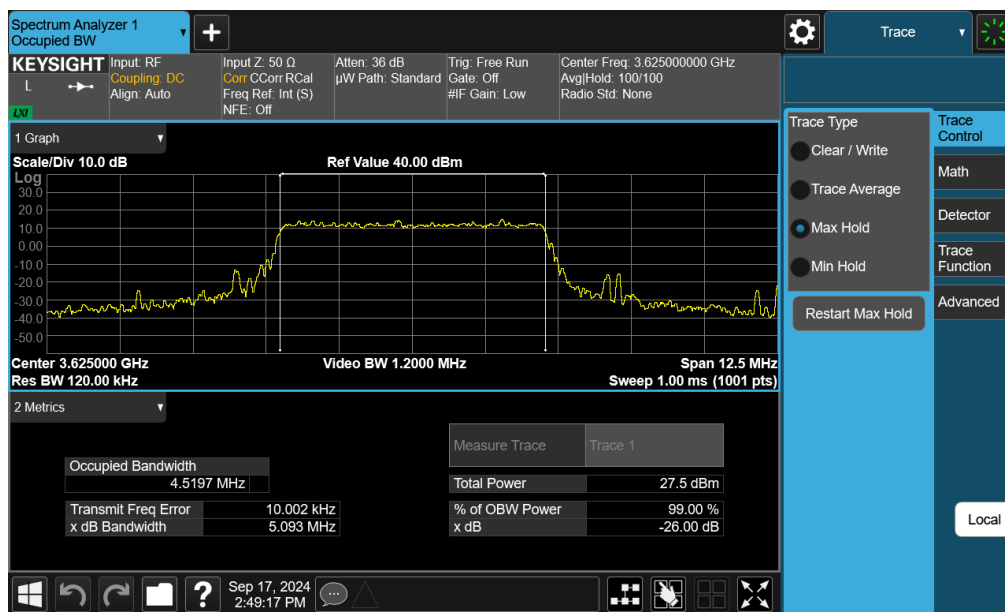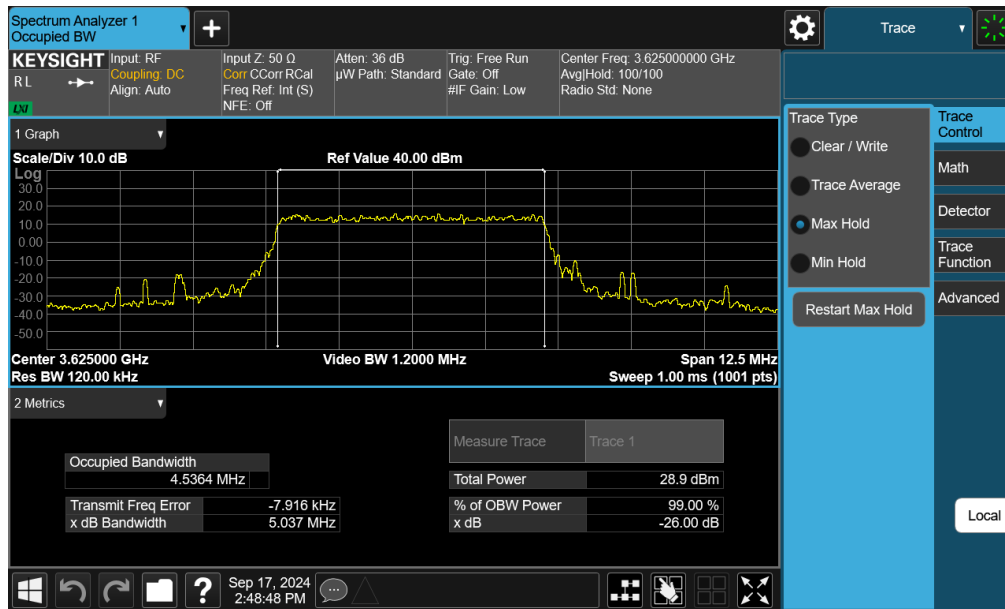


FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 22 of 118

ULCA LTE Band 48 – Ant F

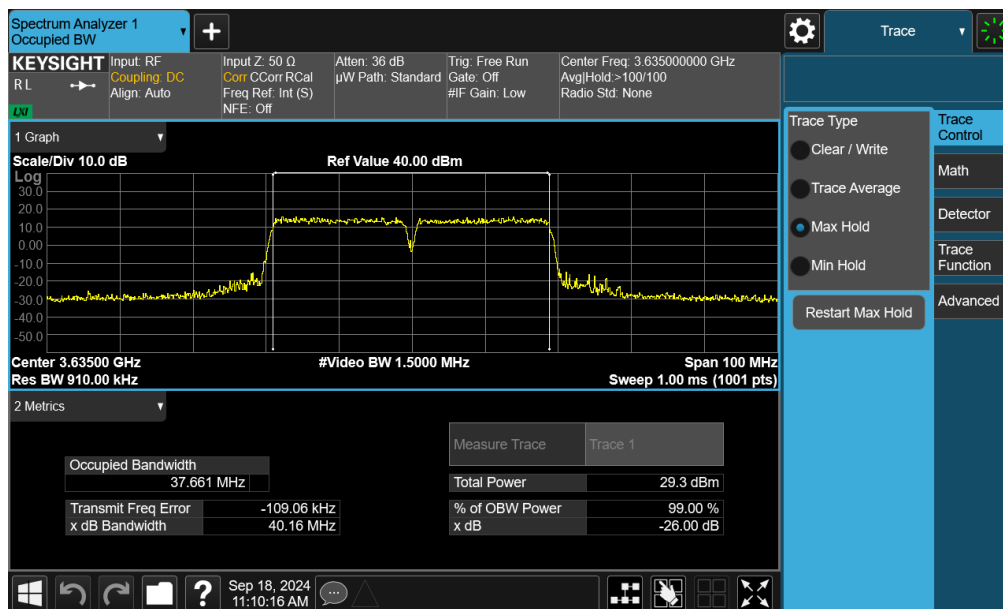


Plot 7-9. Occupied Bandwidth Plot (ULCA LB48 - 20+20MHz QPSK - Full RB Configuration - Ant F)

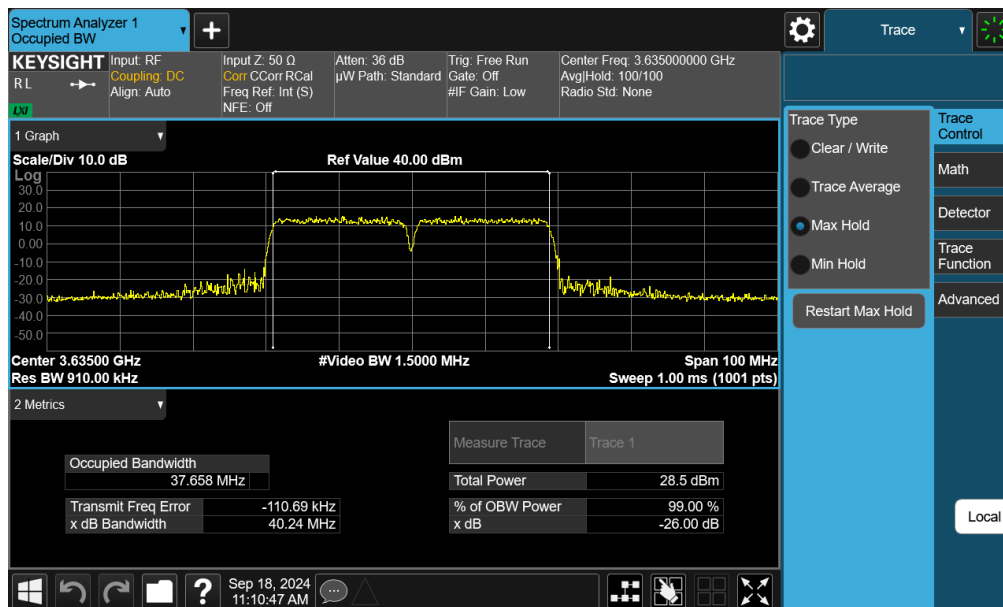


Plot 7-10. Occupied Bandwidth Plot (ULCA LB48 - 20+20MHz 16-QAM - Full RB Configuration - Ant F)

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 23 of 118

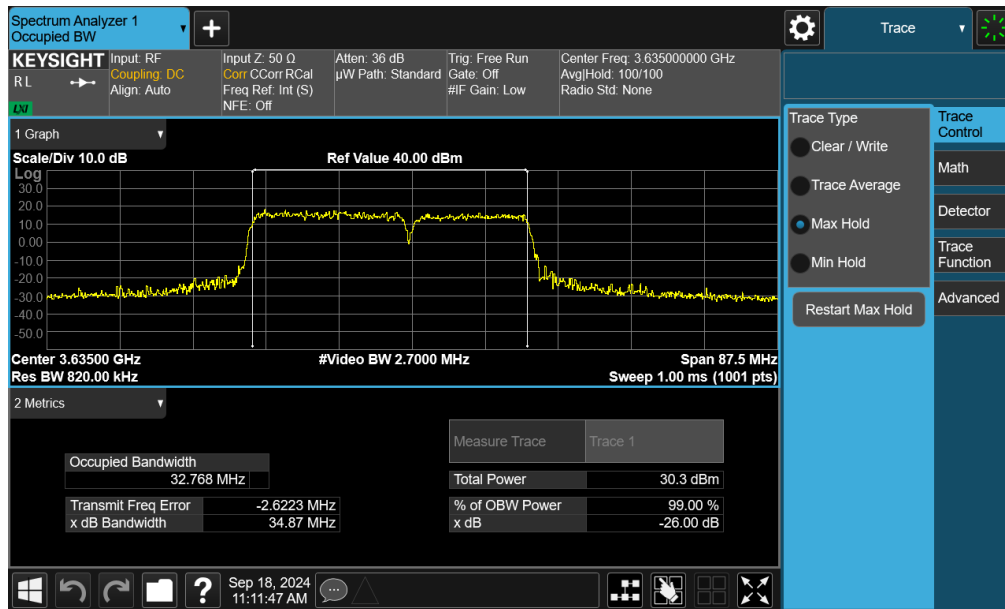


Plot 7-11. Occupied Bandwidth Plot (ULCA LB48 - 20+15MHz QPSK - Full RB Configuration - Ant F)

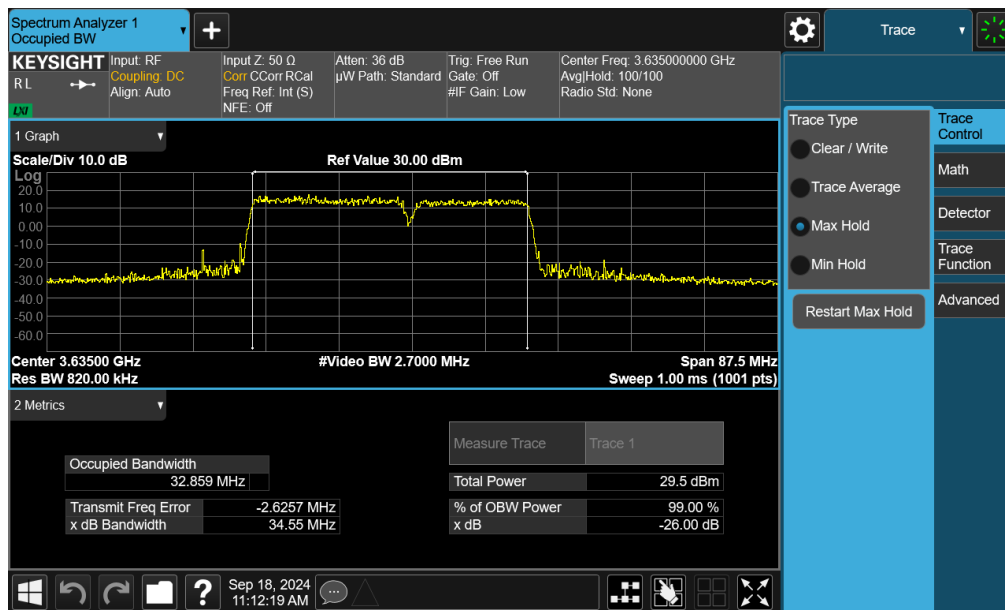


Plot 7-12. Occupied Bandwidth Plot (ULCA LB48 - 20+15MHz 16-QAM - Full RB Configuration - Ant F)

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 24 of 118

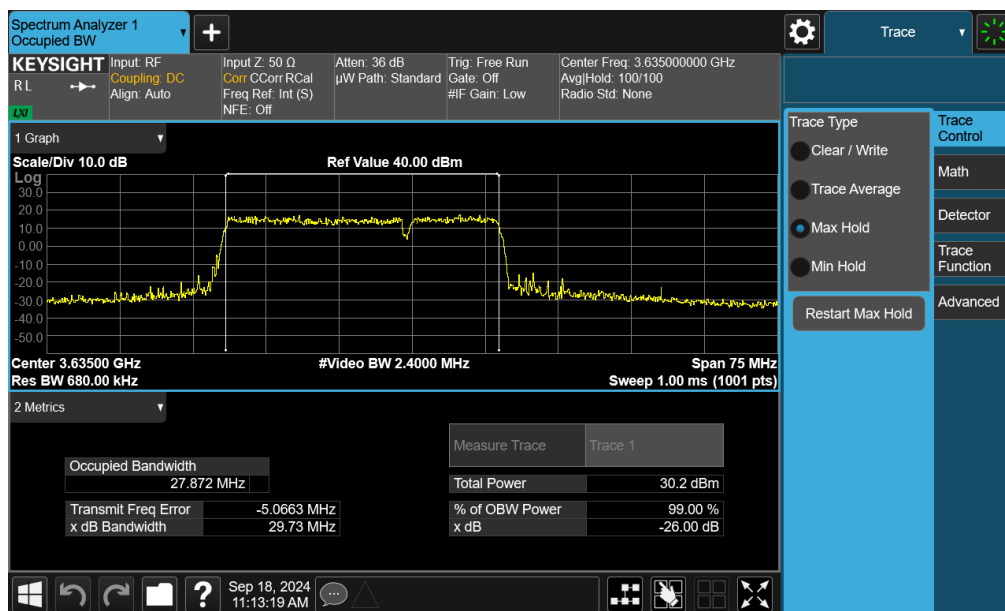


Plot 7-13. Occupied Bandwidth Plot (ULCA LB48 - 20+10MHz QPSK - Full RB Configuration - Ant F)

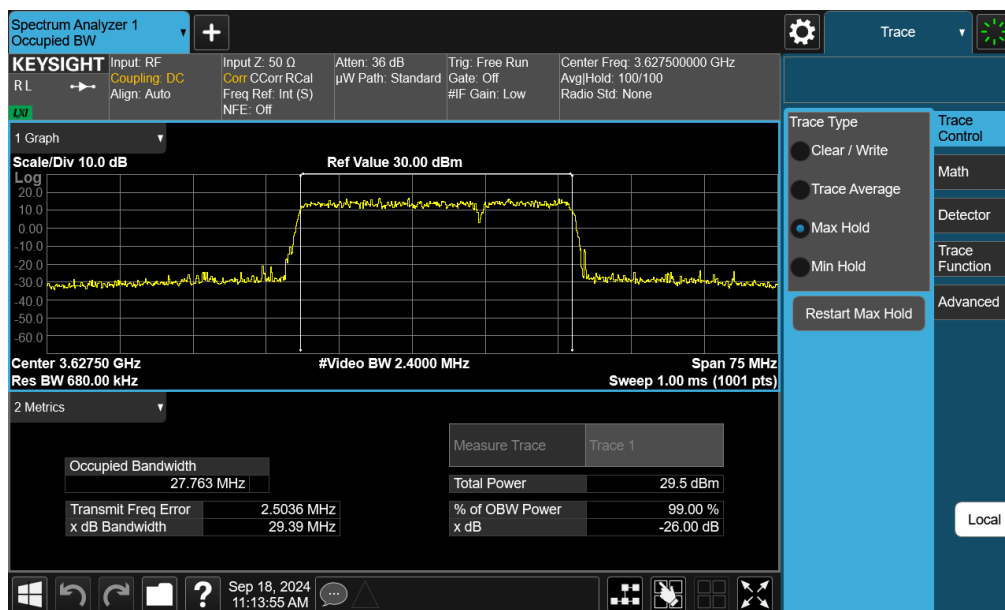

Plot 7-14. Occupied Bandwidth Plot (ULCA LB48 - 20+10MHz 16-QAM - Full RB Configuration - Ant F)

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 25 of 118



© 2023 ELEMENT V11.1 08/28/2023


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode	Bandwidth	Modulation	OBW [MHz]
NR-n48	40MHz	$\pi/2$ BPSK	35.88
		QPSK	38.07
		16QAM	38.08
	30MHz	$\pi/2$ BPSK	27.02
		QPSK	28.01
		16QAM	28.05
	20MHz	$\pi/2$ BPSK	18.01
		QPSK	18.32
		16QAM	18.31
	15MHz	$\pi/2$ BPSK	12.94
		QPSK	13.69
		16QAM	13.70
	10 MHz	$\pi/2$ BPSK	8.69
		QPSK	8.66
		16QAM	8.67


Table 7-10. Occupied Bandwidth Test Results – NR Band n48 – Ant F

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 27 of 118

NR Band n48 – Ant F

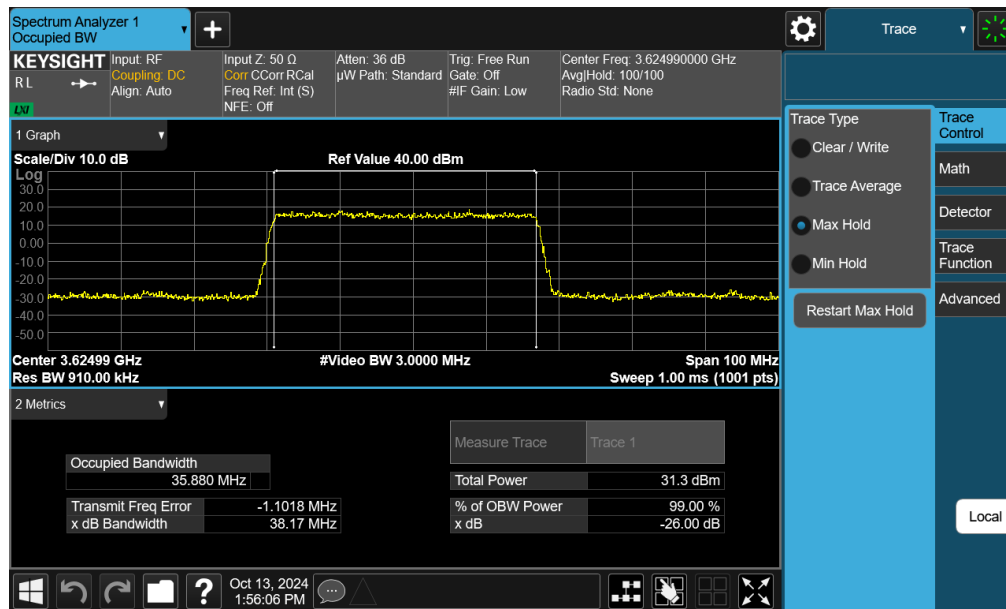


Plot 7-17. Occupied Bandwidth Plot (NR Band n48 - 40MHz $\pi/2$ BPSK - Full RB Configuration - Ant F)

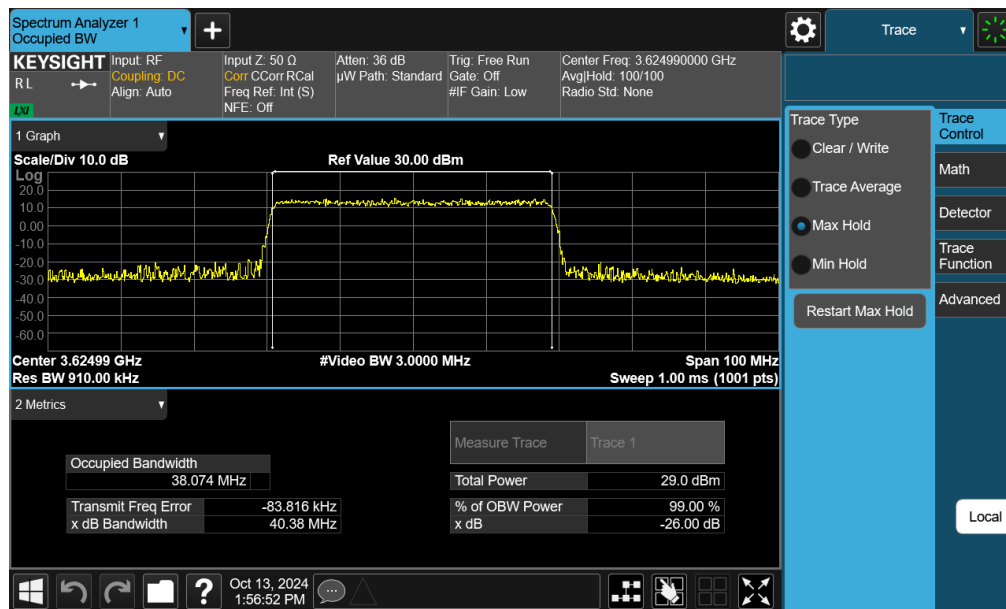


Plot 7-18. Occupied Bandwidth Plot (NR Band n48 - 40MHz QPSK - Full RB Configuration - Ant F)

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 28 of 118

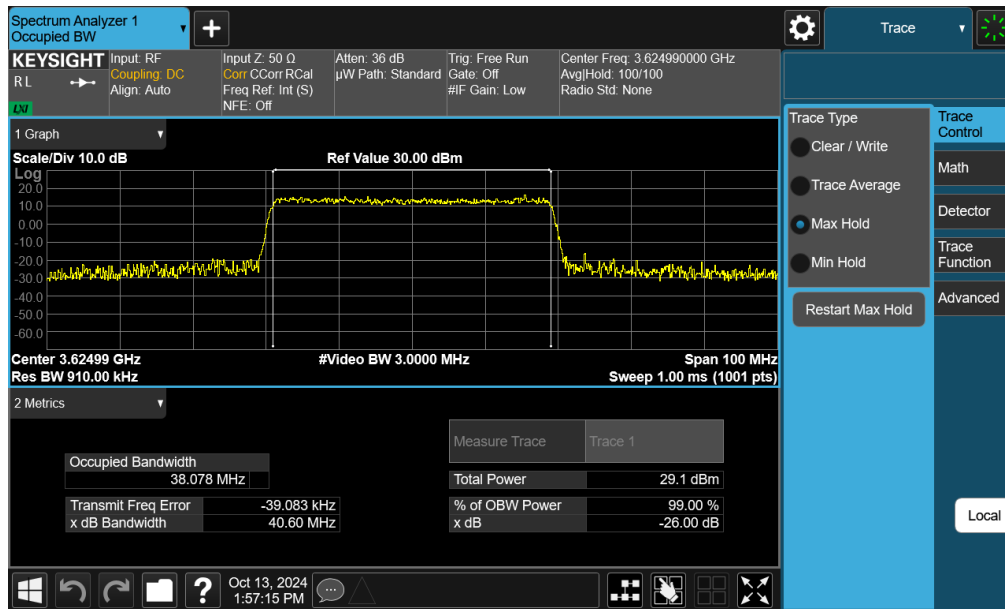


Plot 7-19. Occupied Bandwidth Plot (NR Band n48 - 40MHz 16-QAM - Full RB Configuration - Ant F)

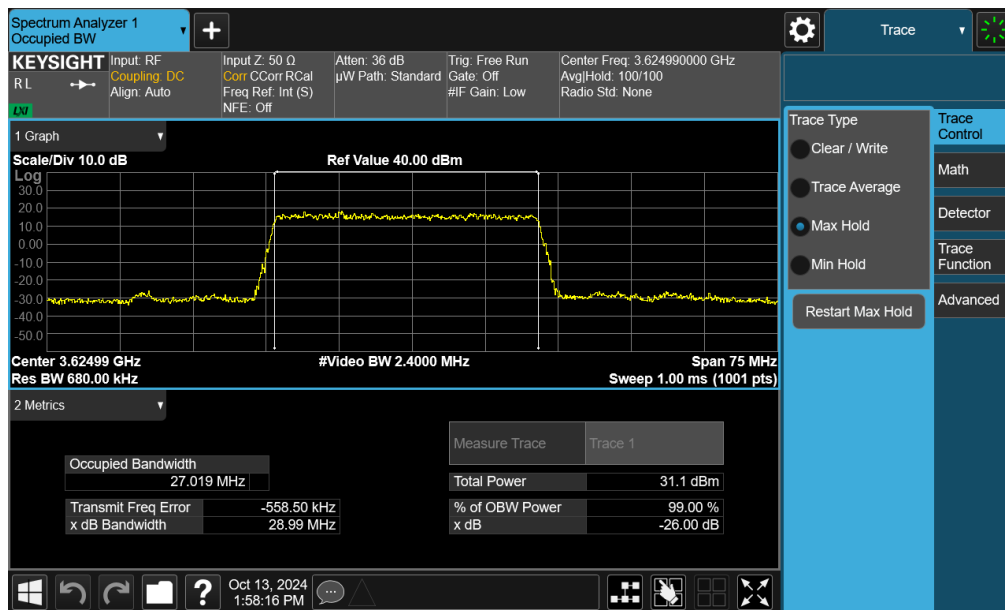


Plot 7-20. Occupied Bandwidth Plot (NR Band n48 - 30MHz $\pi/2$ BPSK - Full RB Configuration - Ant F)

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 29 of 118

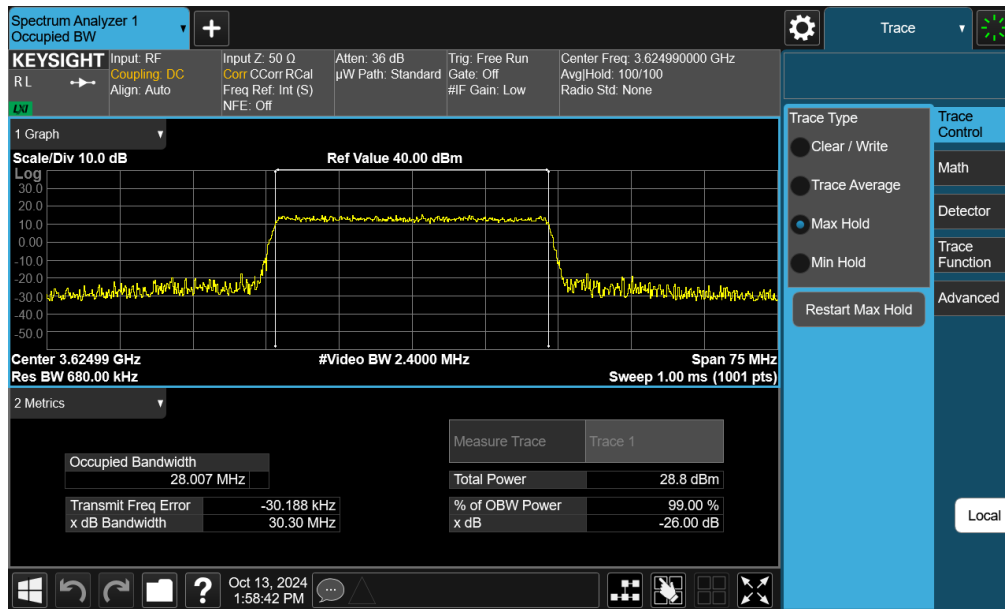


Plot 7-21. Occupied Bandwidth Plot (NR Band n48 - 30MHz QPSK - Full RB Configuration - Ant F)

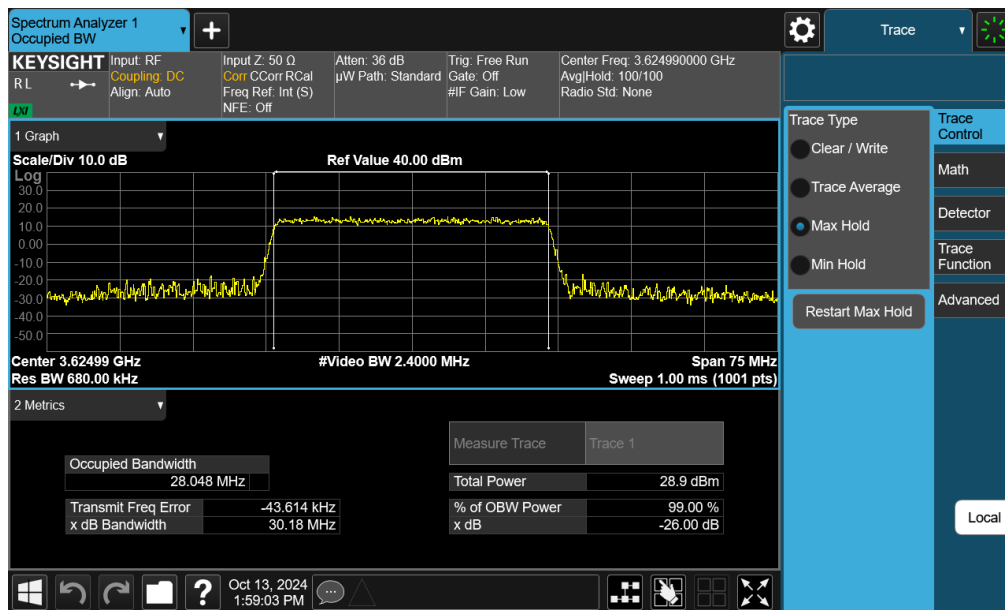


Plot 7-22. Occupied Bandwidth Plot (NR Band n48 - 30MHz 16-QAM - Full RB Configuration - Ant F)

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 30 of 118

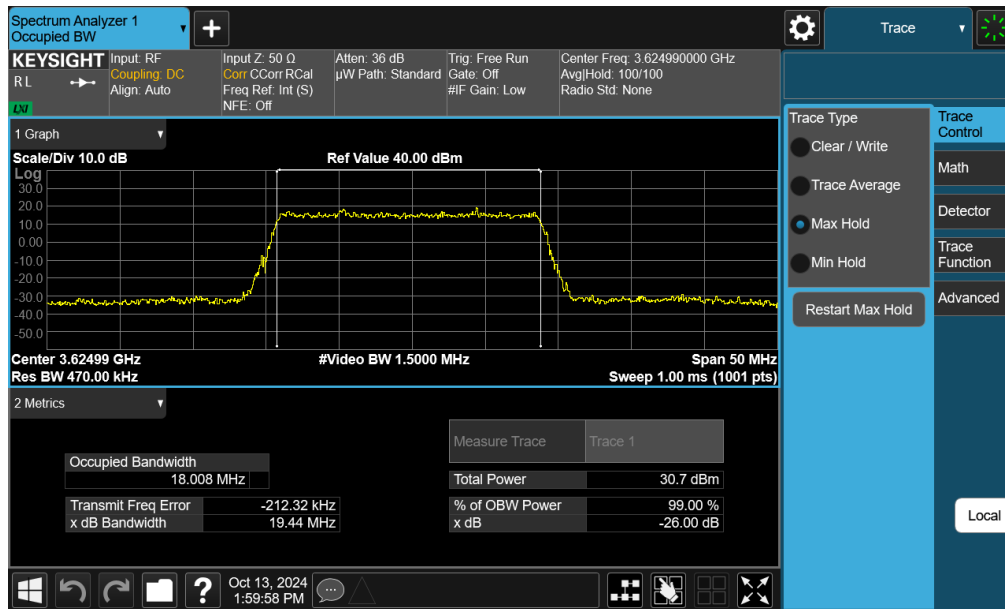


Plot 7-23. Occupied Bandwidth Plot (NR Band n48 - 20MHz $\pi/2$ BPSK - Full RB Configuration - Ant F)

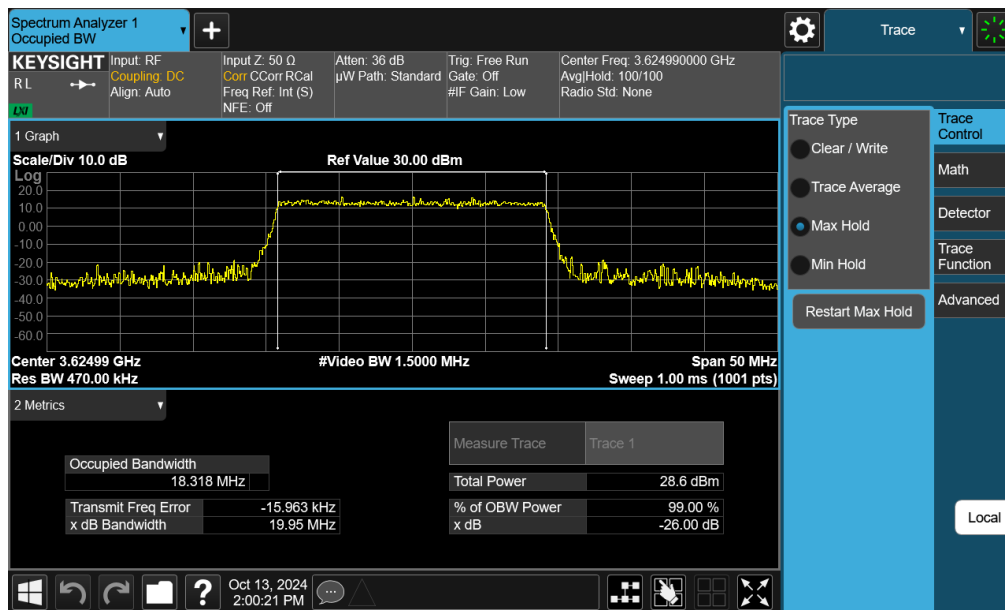


Plot 7-24. Occupied Bandwidth Plot (NR Band n48 - 20MHz QPSK - Full RB Configuration - Ant F)

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 31 of 118

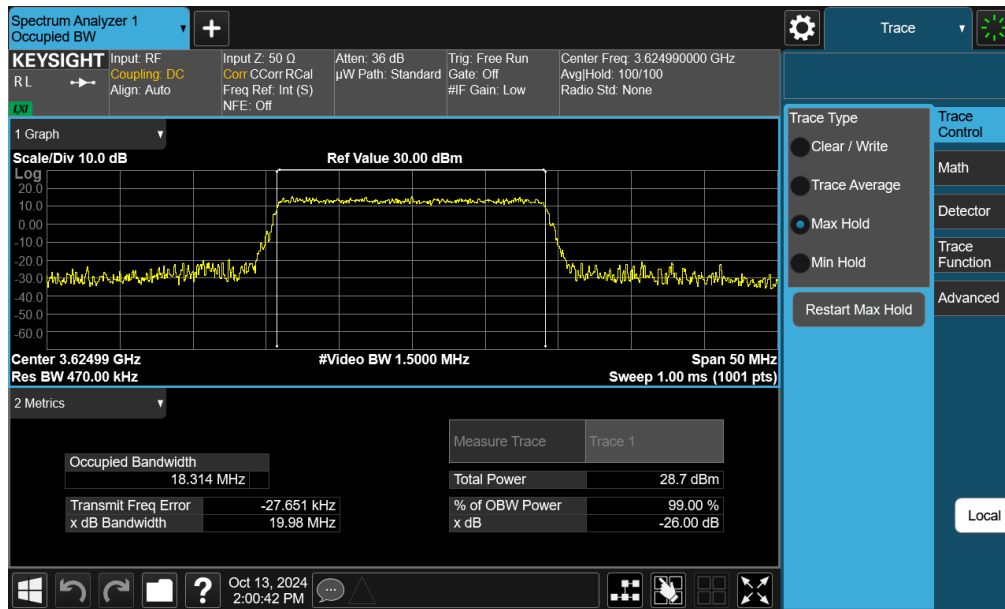


Plot 7-25. Occupied Bandwidth Plot (NR Band n48 - 20MHz 16-QAM - Full RB Configuration - Ant F)

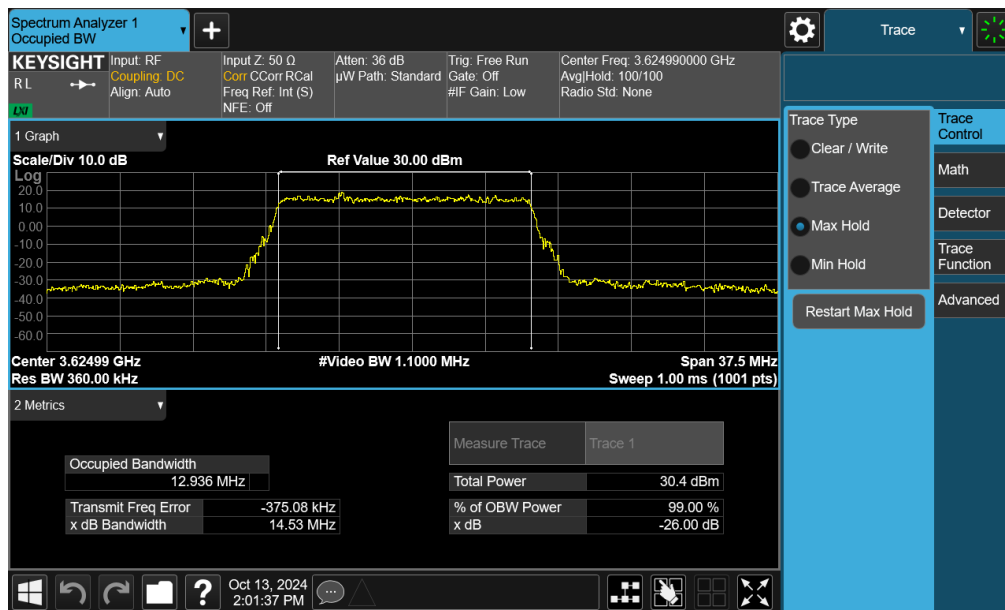


Plot 7-26. Occupied Bandwidth Plot (NR Band n48 - 15MHz $\pi/2$ BPSK - Full RB Configuration - Ant F)

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 32 of 118

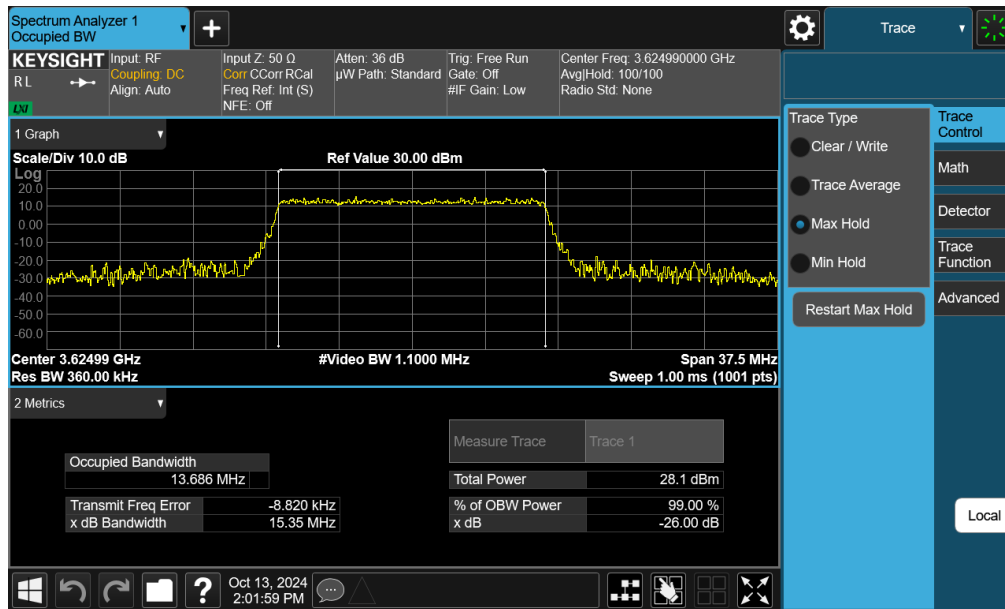

Plot 7-27. Occupied Bandwidth Plot (NR Band n48 - 15MHz QPSK - Full RB Configuration - Ant F)

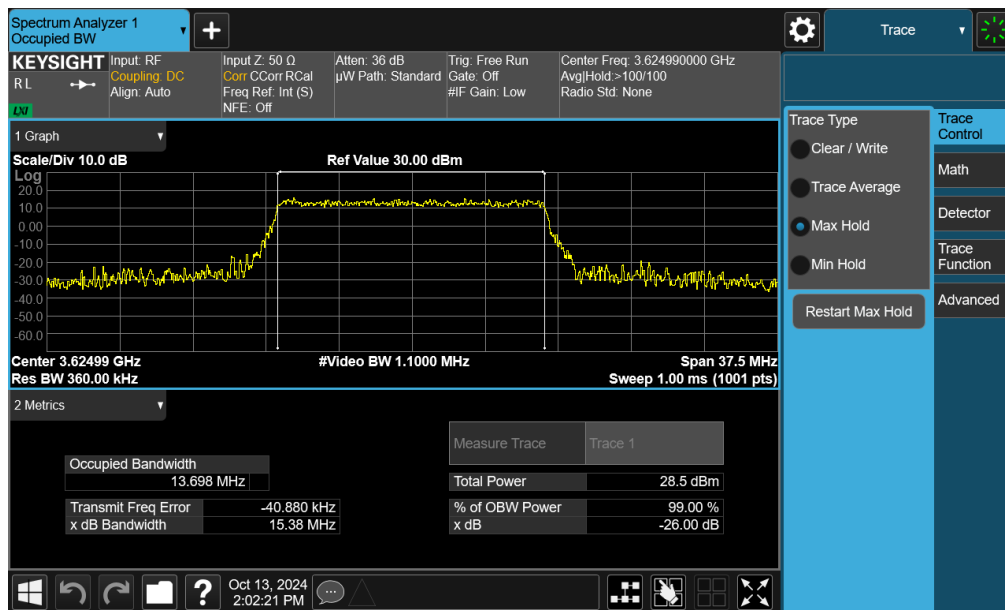


Plot 7-28. Occupied Bandwidth Plot (NR Band n48 - 15MHz 16-QAM - Full RB Configuration - Ant F)

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 33 of 118




Plot 7-29. Occupied Bandwidth Plot (NR Band n48 - 10MHz $\pi/2$ BPSK - Full RB Configuration - Ant F)

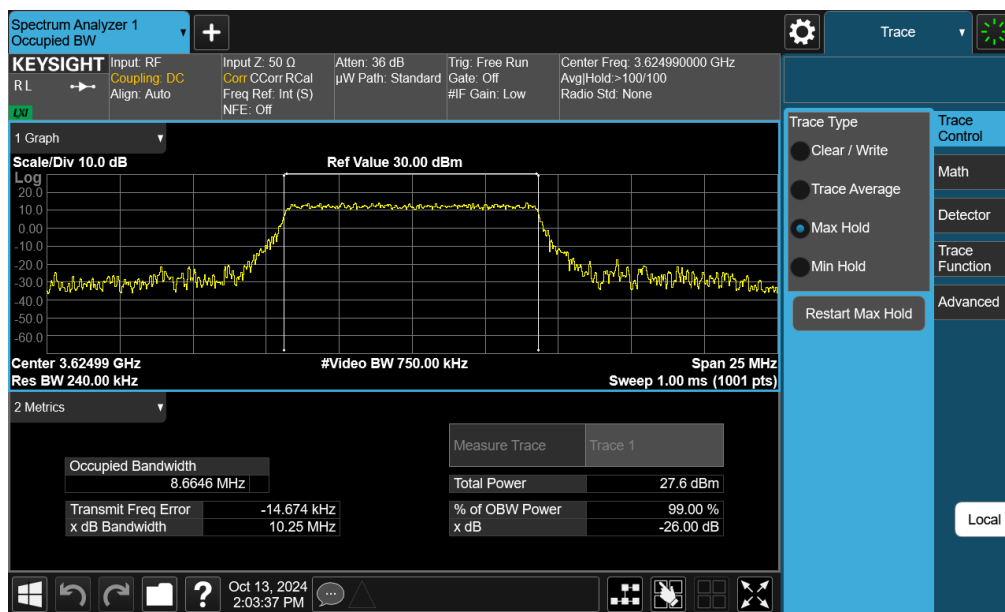

Plot 7-30. Occupied Bandwidth Plot (NR Band n48 - 10MHz QPSK - Full RB Configuration - Ant F)

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 34 of 118

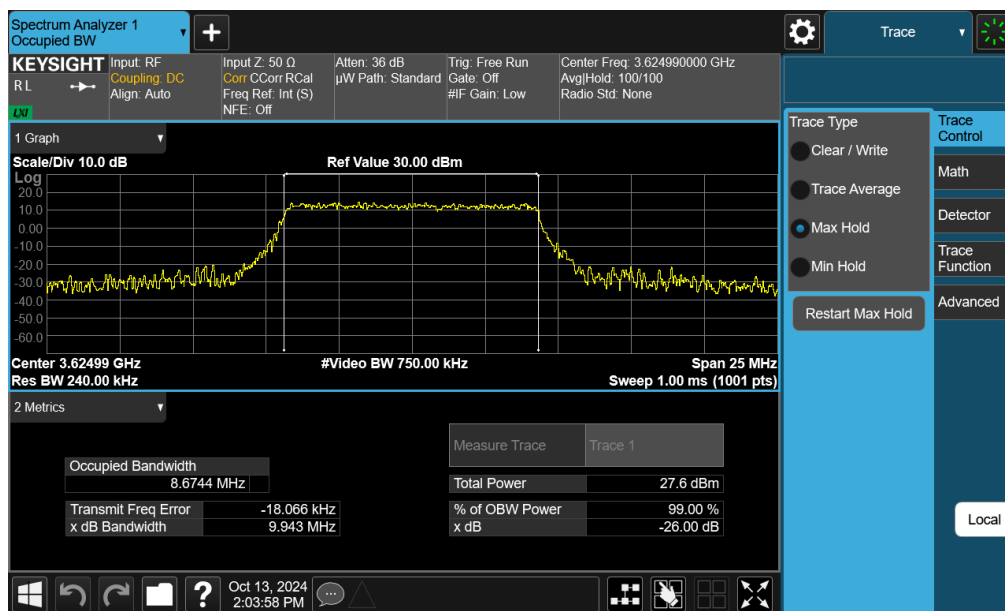

Plot 7-31. Occupied Bandwidth Plot (NR Band n48 - 10MHz 16-QAM - Full RB Configuration - Ant F)

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 35 of 118

Mode	Bandwidth	Modulation	OBW [MHz]
NR-n48	40MHz	$\pi/2$ BPSK	35.86
		QPSK	38.16
		16QAM	38.14

Table 7-11. Occupied Bandwidth Test Results – NR Band n48 – Ant C

Mode	Bandwidth	Modulation	OBW [MHz]
NR-n48	40MHz	$\pi/2$ BPSK	35.94
		QPSK	38.10
		16QAM	38.11


Table 7-12. Occupied Bandwidth Test Results – NR Band n48 – Ant I

Mode	Bandwidth	Modulation	OBW [MHz]
NR-n48	40MHz	$\pi/2$ BPSK	36.02
		QPSK	38.09
		16QAM	38.04


Table 7-13. Occupied Bandwidth Test Results – NR Band n48 – Ant D

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 36 of 118

NR Band n48 – Ant C

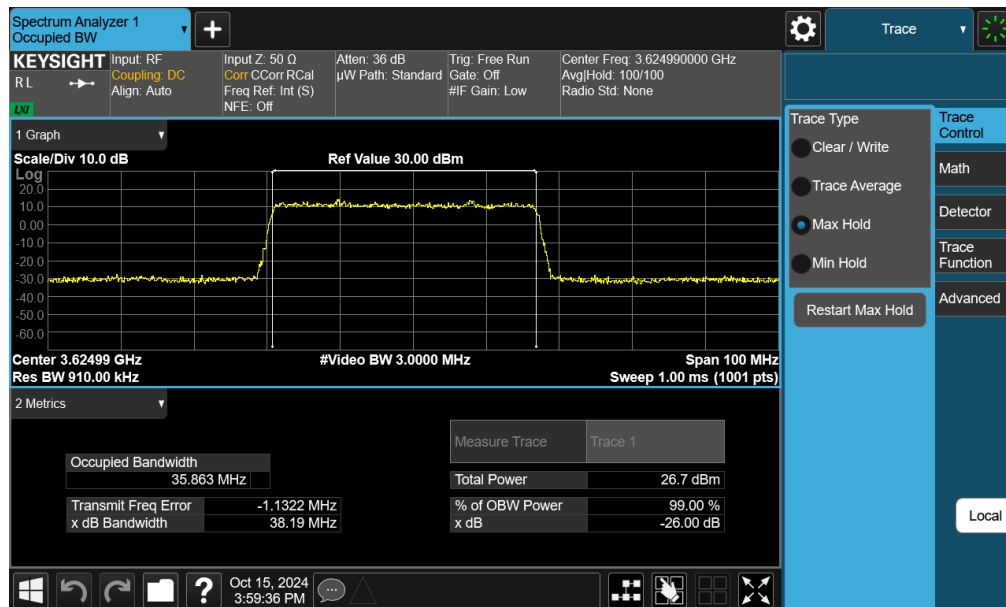

Plot 7-32. Occupied Bandwidth Plot (NR Band n48 - 40MHz $\pi/2$ BPSK - Full RB Configuration - Ant C)

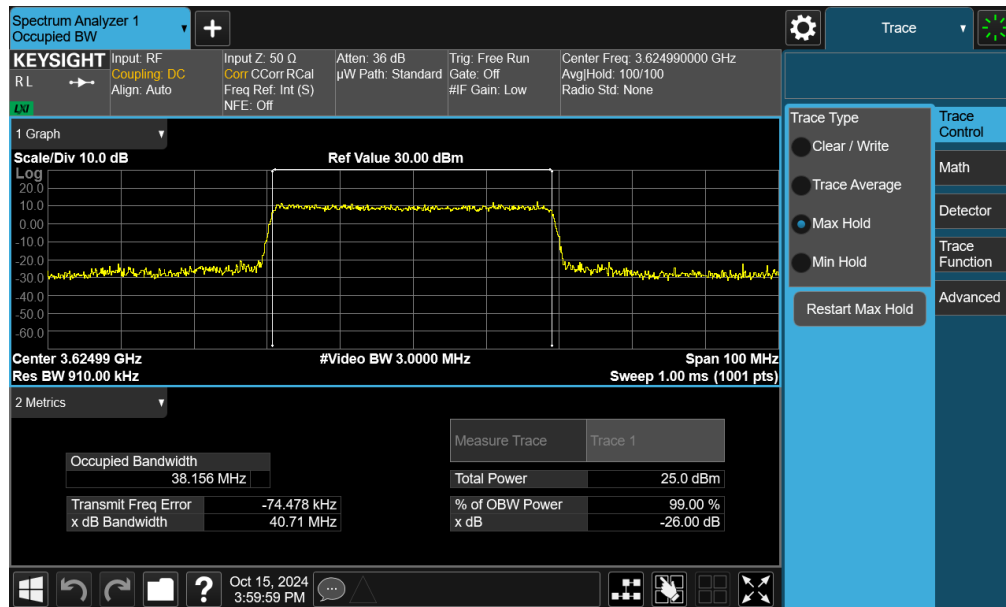


Plot 7-33. Occupied Bandwidth Plot (NR Band n48 - 40MHz QPSK - Full RB Configuration - Ant C)


FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 37 of 118

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 38 of 118

NR Band n48 – Ant I

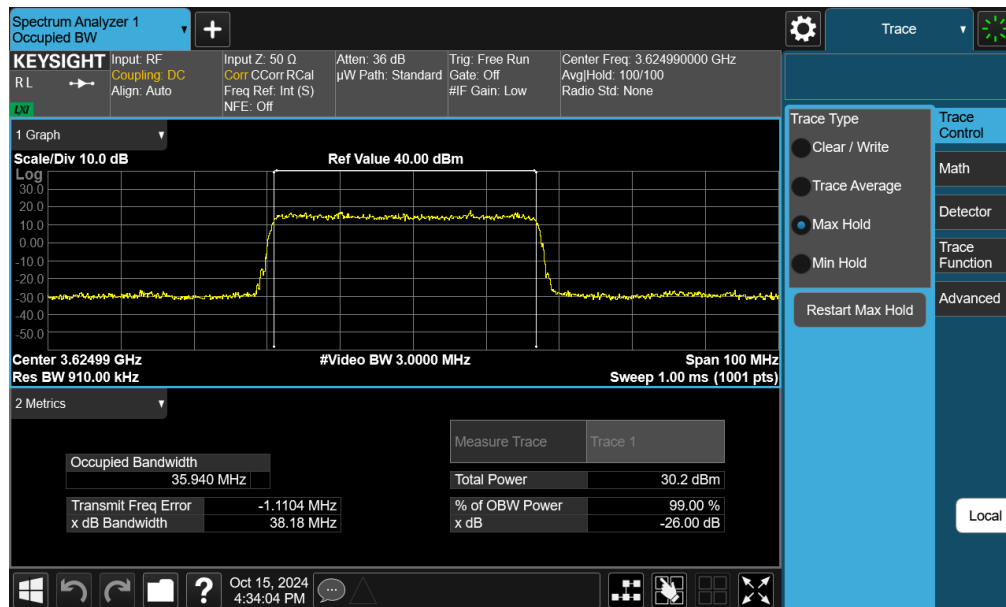


Plot 7-35. Occupied Bandwidth Plot (NR Band n48 - 40MHz $\pi/2$ BPSK - Full RB Configuration - Ant 1)

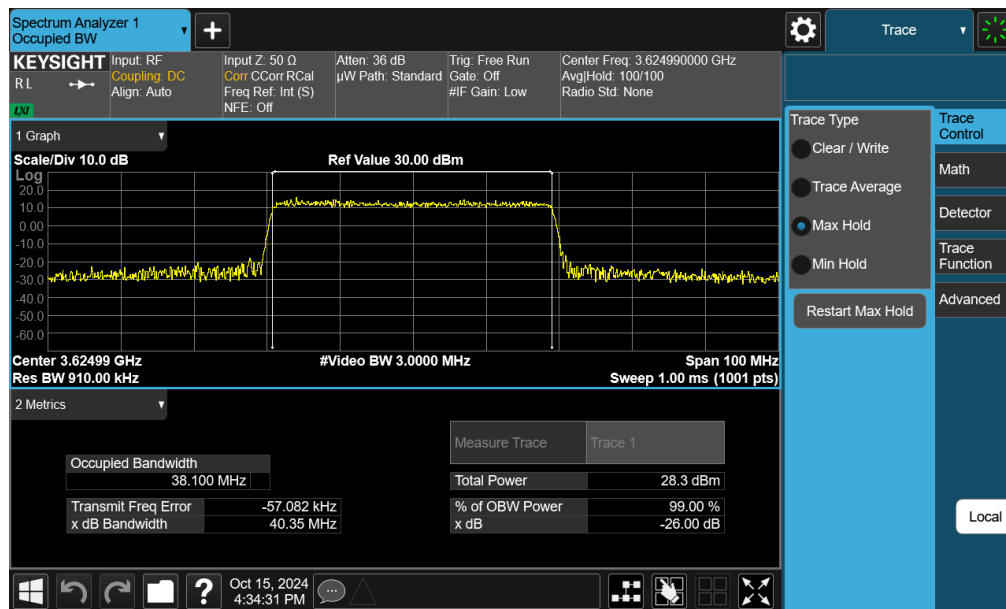

Plot 7-36. Occupied Bandwidth Plot (NR Band n48 - 40MHz QPSK - Full RB Configuration - Ant I)

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 39 of 118

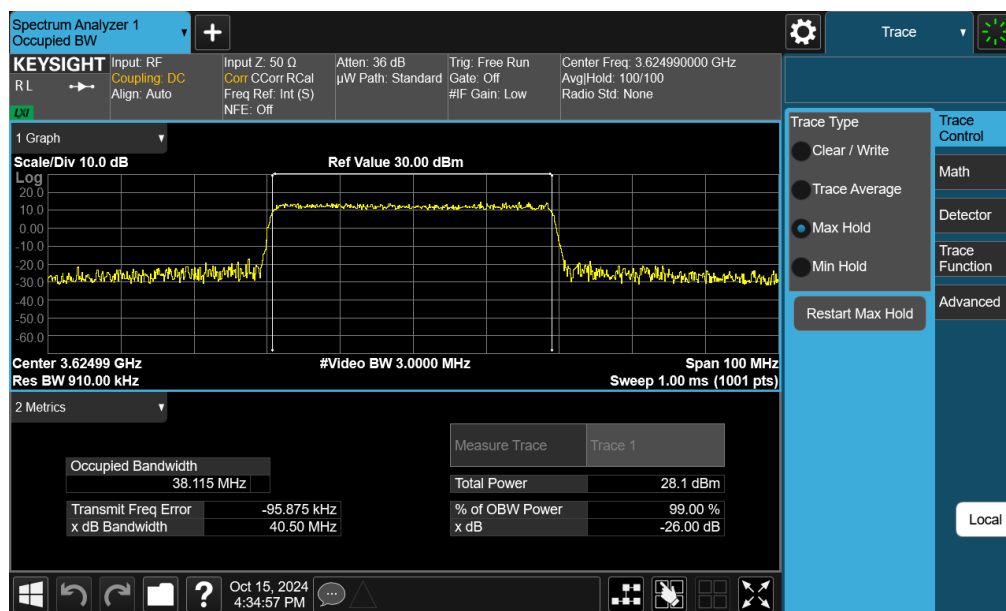

Plot 7-37. Occupied Bandwidth Plot (NR Band n48 - 40MHz 16-QAM - Full RB Configuration - Ant I)

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 40 of 118