




NR Band n48 – Ant I

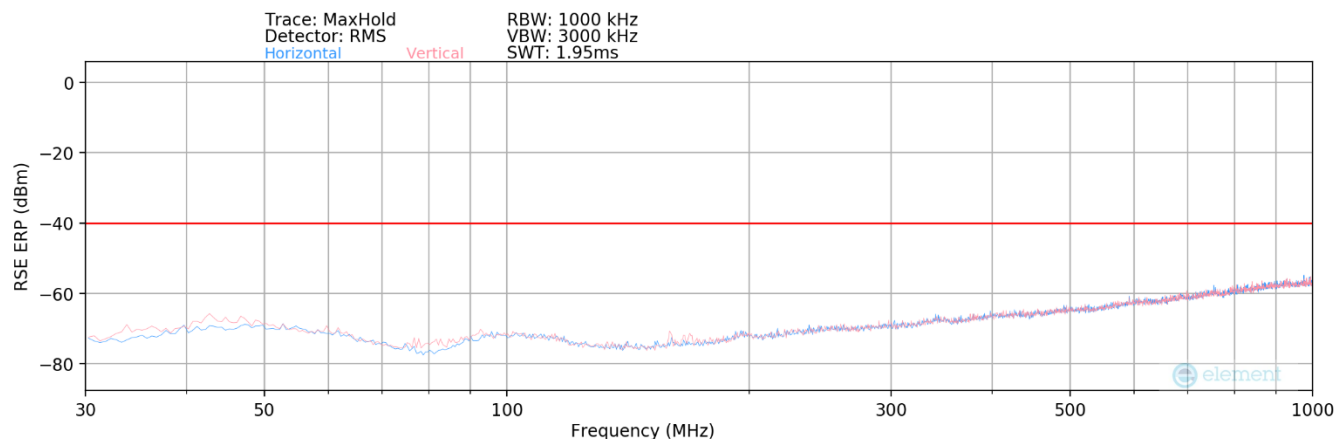

Plot 7-102. Radiated Spurious Plot (NR Band n48 – Ant I)

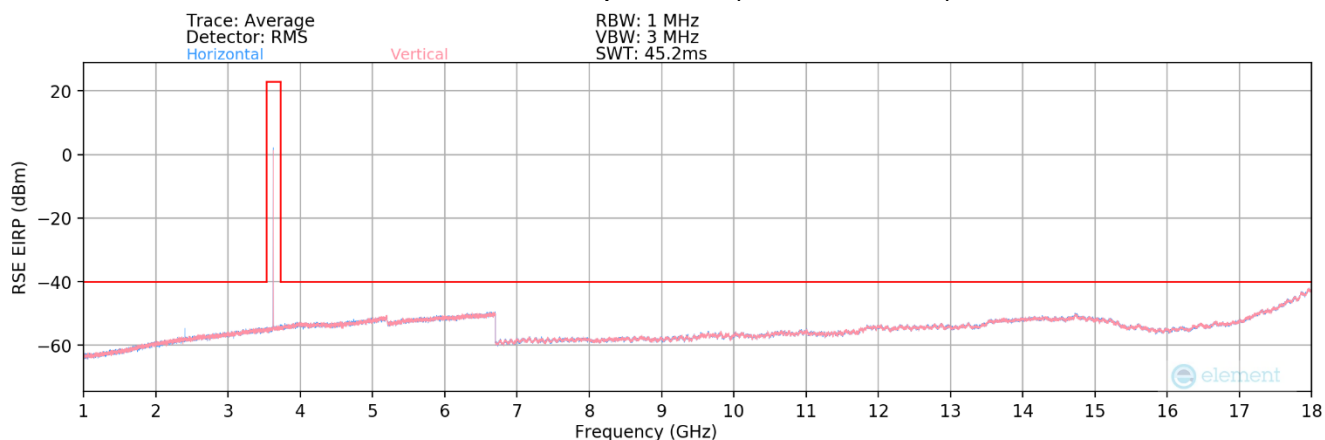


Plot 7-103. Radiated Spurious Plot (NR Band n48 – Ant I)

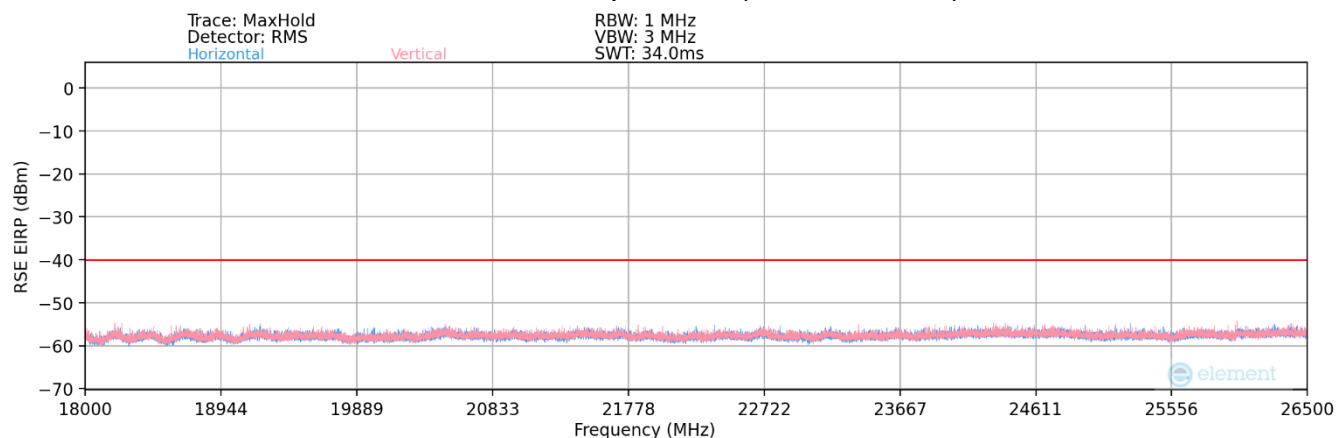

Plot 7-104. Radiated Spurious Plot (NR Band n48 – Ant I)

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 100 of 118

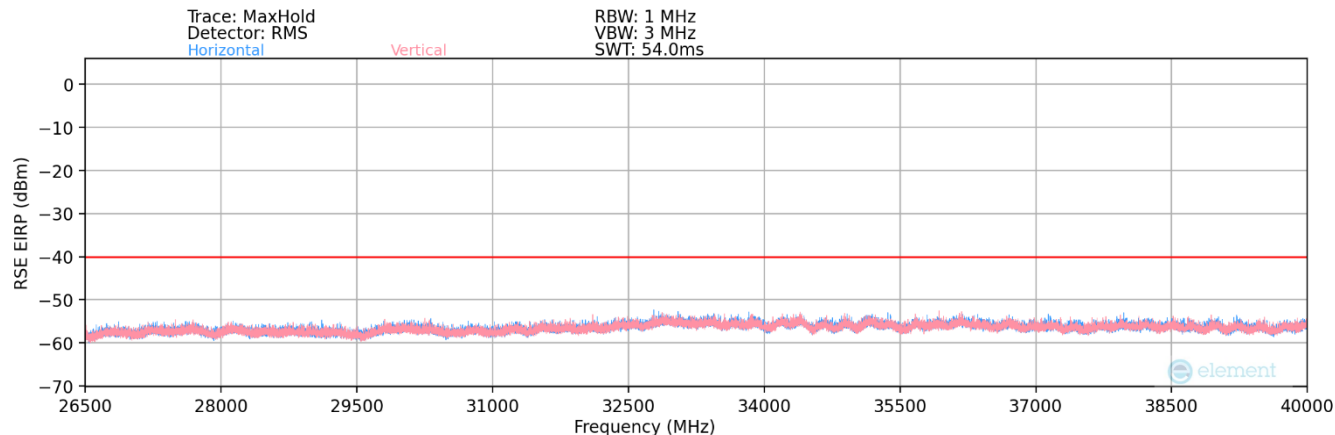

Plot 7-105. Radiated Spurious Plot (NR Band n48 – Ant I)

Bandwidth (MHz):	40
Frequency (MHz):	3570.0
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7140.00	H	-	-	-77.00	6.77	36.77	-58.49	-40.00	-18.49
10710.00	H	-	-	-79.23	10.93	38.70	-56.55	-40.00	-16.55
14280.00	H	-	-	-80.06	16.90	43.84	-51.42	-40.00	-11.42
17850.00	H	-	-	-80.86	23.80	49.94	-45.32	-40.00	-5.32
21420.00	H	-	-	-54.62	-3.25	49.13	-55.67	-40.00	-15.67
24990.00	H	-	-	-52.37	-3.32	51.31	-53.49	-40.00	-13.49
28560.00	H	-	-	-54.41	-1.13	51.46	-53.34	-40.00	-13.34
32130.00	H	-	-	-54.19	0.30	53.11	-51.69	-40.00	-11.69

Table 7-43. Radiated Spurious Data (NR Band n48 – Low Channel - Ant I)

Bandwidth (MHz):	40
Frequency (MHz):	3625.0
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7250.00	H	-	-	-76.46	6.97	37.51	-57.75	-40.00	-17.75
10875.00	H	-	-	-79.13	10.92	38.79	-56.46	-40.00	-16.46
14500.00	H	-	-	-80.31	16.89	43.58	-51.68	-40.00	-11.68
18125.00	H	-	-	-53.47	-3.22	50.31	-54.49	-40.00	-14.49
21750.00	H	-	-	-52.78	-3.58	50.64	-54.16	-40.00	-14.16
25375.00	H	-	-	-52.67	-3.04	51.29	-53.51	-40.00	-13.51
29000.00	H	-	-	-53.19	-1.03	52.78	-52.02	-40.00	-12.02
32625.00	H	-	-	-53.22	0.53	54.31	-50.49	-40.00	-10.49

Table 7-44. Radiated Spurious Data (NR Band n48 – Mid Channel - Ant I)

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 101 of 118


Bandwidth (MHz):	40
Frequency (MHz):	3680.0
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7360.00	H	-	-	-76.48	6.74	37.26	-57.99	-40.00	-17.99
11040.00	H	-	-	-79.62	11.42	38.80	-56.46	-40.00	-16.46
14720.00	H	-	-	-80.23	16.66	43.43	-51.83	-40.00	-11.83
18400.00	H	-	-	-53.31	-3.35	50.34	-54.46	-40.00	-14.46
22080.00	H	-	-	-52.27	-3.71	51.02	-53.78	-40.00	-13.78
25760.00	H	-	-	-53.16	-2.55	51.29	-53.51	-40.00	-13.51
29440.00	H	-	-	-54.43	-0.64	51.93	-52.87	-40.00	-12.87
33120.00	H	-	-	-53.01	0.21	54.20	-50.60	-40.00	-10.60


Table 7-45. Radiated Spurious Data (NR Band n48 – High Channel - Ant I)

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 102 of 118


NR Band n48 – Ant D

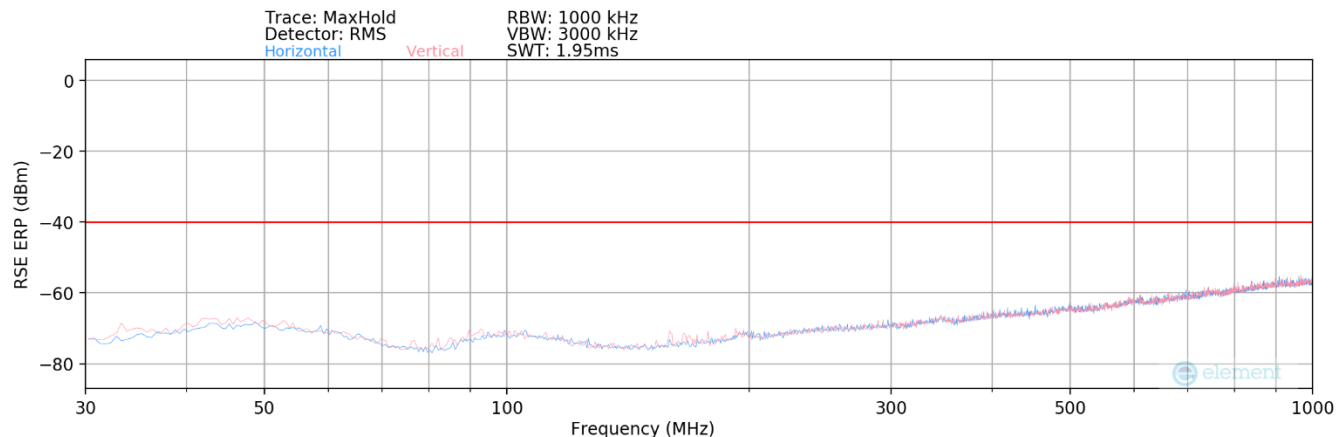

Plot 7-106. Radiated Spurious Plot (NR Band n48 – Ant D)

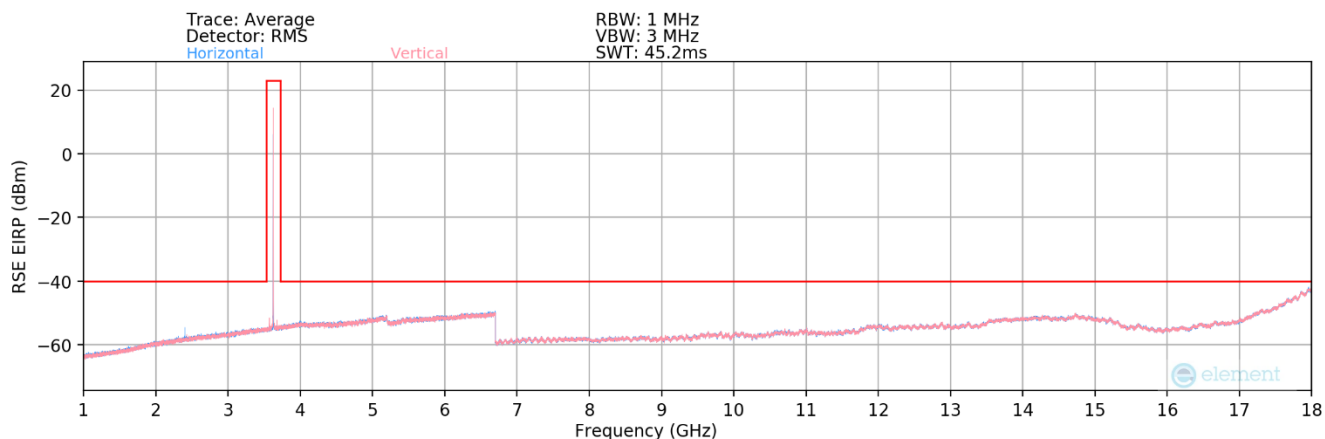


Plot 7-107. Radiated Spurious Plot (NR Band n48 – Ant D)

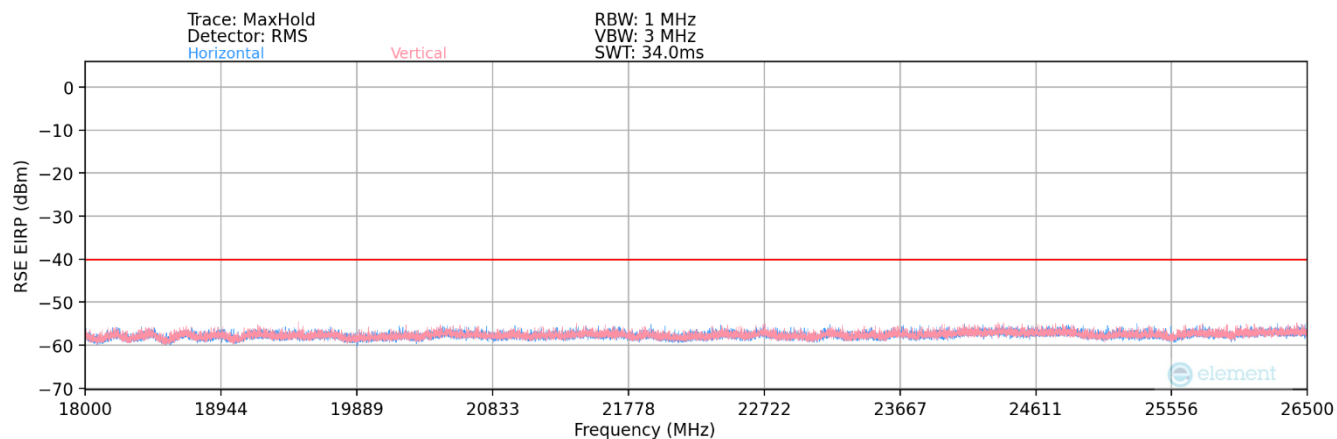

Plot 7-108. Radiated Spurious Plot (NR Band n48 – Ant D)

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 103 of 118

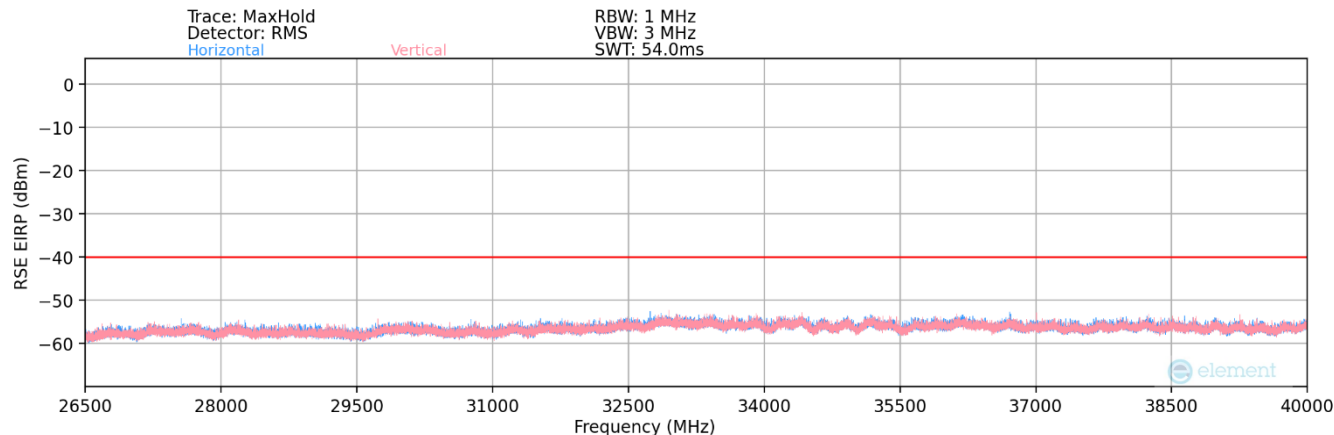

Plot 7-109. Radiated Spurious Plot (NR Band n48 – Ant D)

Bandwidth (MHz):	40
Frequency (MHz):	3570.0
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7140.00	H	-	-	-77.15	6.77	36.62	-58.64	-40.00	-18.64
10710.00	H	-	-	-79.08	10.93	38.85	-56.40	-40.00	-16.40
14280.00	H	-	-	-80.30	16.90	43.60	-51.66	-40.00	-11.66
17850.00	H	-	-	-81.09	23.80	49.71	-45.55	-40.00	-5.55
21420.00	H	-	-	-54.21	-3.25	49.54	-55.26	-40.00	-15.26
24990.00	H	-	-	-52.47	-3.32	51.21	-53.59	-40.00	-13.59
28560.00	H	-	-	-54.60	-1.13	51.27	-53.53	-40.00	-13.53
32130.00	H	-	-	-54.78	0.30	52.52	-52.28	-40.00	-12.28

Table 7-46. Radiated Spurious Data (NR Band n48 – Low Channel - Ant D)

Bandwidth (MHz):	40
Frequency (MHz):	3625.0
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7250.00	H	-	-	-76.53	6.97	37.44	-57.82	-40.00	-17.82
10875.00	H	-	-	-79.06	10.92	38.86	-56.39	-40.00	-16.39
14500.00	H	-	-	-80.20	16.89	43.69	-51.57	-40.00	-11.57
18125.00	H	-	-	-53.55	-3.22	50.23	-54.57	-40.00	-14.57
21750.00	H	-	-	-53.18	-3.58	50.24	-54.56	-40.00	-14.56
25375.00	H	-	-	-52.64	-3.04	51.32	-53.48	-40.00	-13.48
29000.00	H	-	-	-53.41	-1.03	52.56	-52.24	-40.00	-12.24
32625.00	H	-	-	-53.67	0.53	53.86	-50.94	-40.00	-10.94

Table 7-47. Radiated Spurious Data (NR Band n48 – Mid Channel - Ant D)

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 104 of 118

Bandwidth (MHz):	40
Frequency (MHz):	3680.0
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7360.00	H	-	-	-76.84	6.74	36.90	-58.35	-40.00	-18.35
11040.00	H	-	-	-79.04	11.42	39.38	-55.88	-40.00	-15.88
14720.00	H	-	-	-80.41	16.66	43.25	-52.01	-40.00	-12.01
18400.00	H	-	-	-53.17	-3.35	50.48	-54.32	-40.00	-14.32
22080.00	H	-	-	-52.89	-3.71	50.40	-54.40	-40.00	-14.40
25760.00	H	-	-	-53.03	-2.55	51.42	-53.38	-40.00	-13.38
29440.00	H	-	-	-54.24	-0.64	52.12	-52.68	-40.00	-12.68
33120.00	H	-	-	-53.20	0.21	54.01	-50.79	-40.00	-10.79

Table 7-48. Radiated Spurious Data (NR Band n48 – High Channel - Ant D)

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 105 of 118

7.8 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 96, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI C63.26-2015 – Section 5.6

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes


None

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 106 of 118

LTE Band 48

LTE Band 48					
		Operating Frequency (Hz):		3,625,000,000	
		Ref. Voltage (VDC):		3.863	
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.863	- 30	3,625,011,980	-2,445	-0.0000674
		- 20	3,625,012,726	-1,699	-0.0000469
		- 10	3,625,011,369	-3,056	-0.0000843
		0	3,625,013,837	-588	-0.0000162
		+ 10	3,625,015,422	997	0.0000275
		+ 20 (Ref)	3,625,014,425	0	0.0000000
		+ 30	3,625,019,088	4,663	0.0001286
		+ 40	3,625,018,004	3,579	0.0000987
		+ 50	3,625,016,536	2,111	0.0000582
Battery Endpoint	3.863	+ 20	3,625,015,903	1,478	0.0000408

Table 7-49. LTE Band 48 Frequency Stability Data

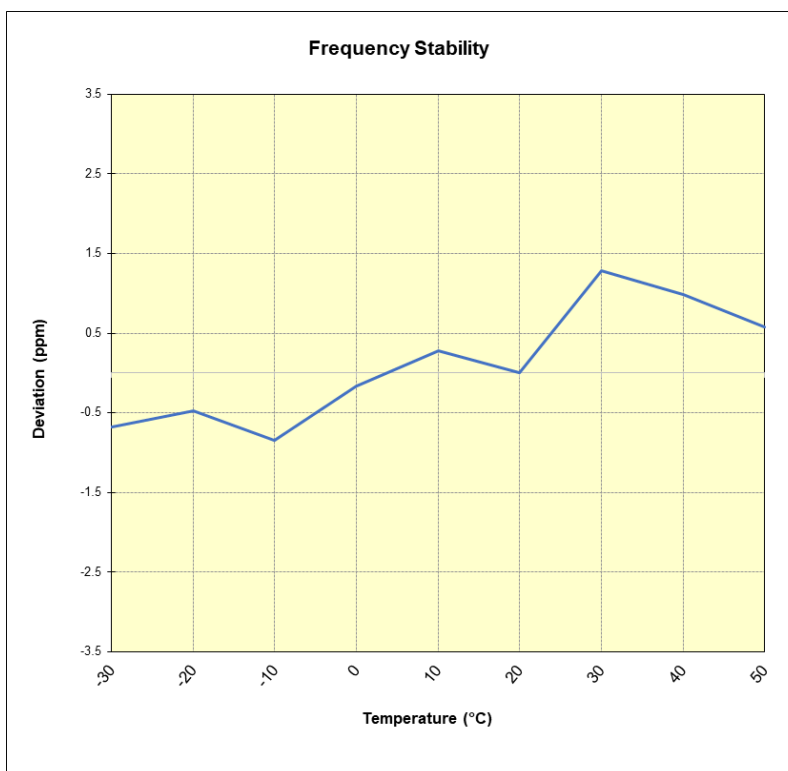


Plot 7-110. LTE Band 48 Frequency Stability Chart

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 107 of 118

Frequency Stability / Temperature Variation

NR Band n48					
		Operating Frequency (Hz):		3,625,000,000	
		Ref. Voltage (VDC):		3.863	
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.863	- 30	3,625,010,980	-2,354	-0.0000649
		- 20	3,625,013,726	392	0.0000108
		- 10	3,625,011,047	-2,287	-0.0000631
		0	3,625,013,837	503	0.0000139
		+ 10	3,625,014,321	987	0.0000272
		+ 20 (Ref)	3,625,013,334	0	0.0000000
		+ 30	3,625,020,111	6,777	0.0001870
		+ 40	3,625,017,411	4,077	0.0001125
		+ 50	3,625,015,442	2,108	0.0000582
Battery Endpoint	3.863	+ 20	3,625,013,211	-123	-0.0000034

Table 7-50. NR Band n48 Frequency Stability Data

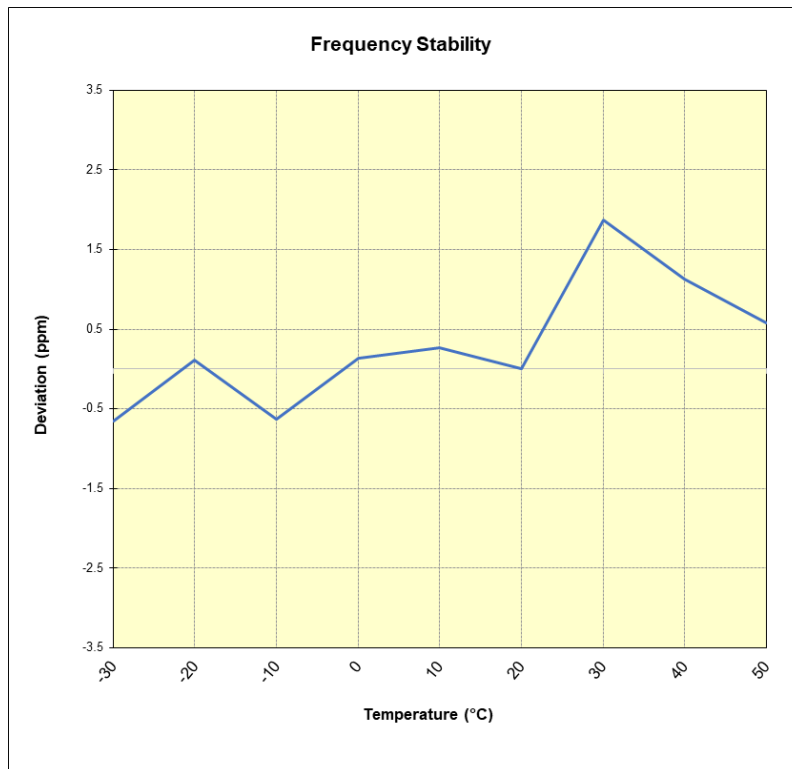

Plot 7-111. NR Band n48 Frequency Stability Chart

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 108 of 118

7.9 End User Device Additional Requirement (CBSD Protocol)

Test Overview and Limit

End user device additional requirements (CBSD Protocol) are tested per the test procedures listed below. During testing, the EUT is connected to a certified LTE CBSD (Ruckus FCC ID: S9GQ910US00) or to a certified NR CBSD (FCC ID: PIDAV2700) as a companion device to show compliance with Part 96.47.

End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.

An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.

Test Procedure Used

KDB 940660 D01 v03, WINNF-18-IN-00178 v1.0.0.00

Test Setup/Method

The EUT was connected via an RF cable to a certified CBSD and spectrum analyzer. The following procedure is performed by applying WINNF-TS-0122 CBRs CBSD Test Specification.


1. Run#1:
 - a. Setup WINNF.PT.C.HBT.1 with 3615MHz – 3635MHz.
 - b. Enable AP service from Ruckus Cloud management.
 - c. Check EUT Tx frequency.
 - d. Disable AP service from Ruckus Cloud management and check EUT stop transmission within 10s.
2. Run#2:
 - a. Setup WINNF.PT.C.HBT.1 with 3660MHz – 3680MHz.
 - b. Enable AP service from Ruckus Cloud management.
 - c. Check EUT Tx frequency.
 - d. Disable AP service from Ruckus Cloud management and check EUT stop transmission within 10s.

Test Notes

The EUT is an End User Device.


FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 109 of 118

Run#1: LTE Band 48

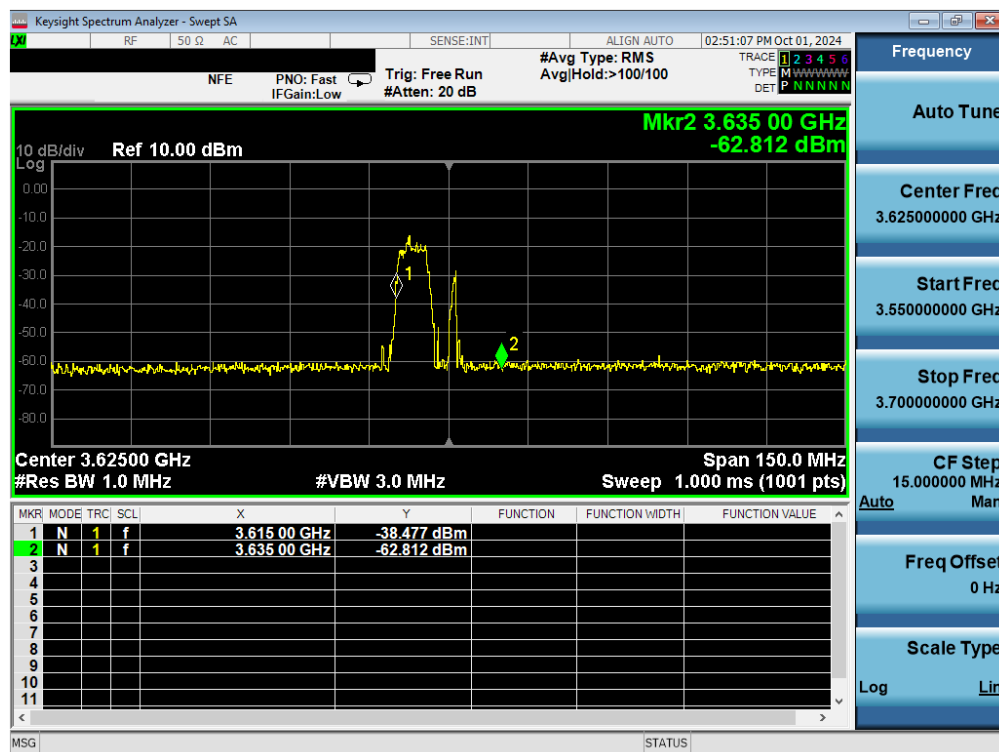

Plot 7-112. Run#1 End User Device Frequency of Operations

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 110 of 118

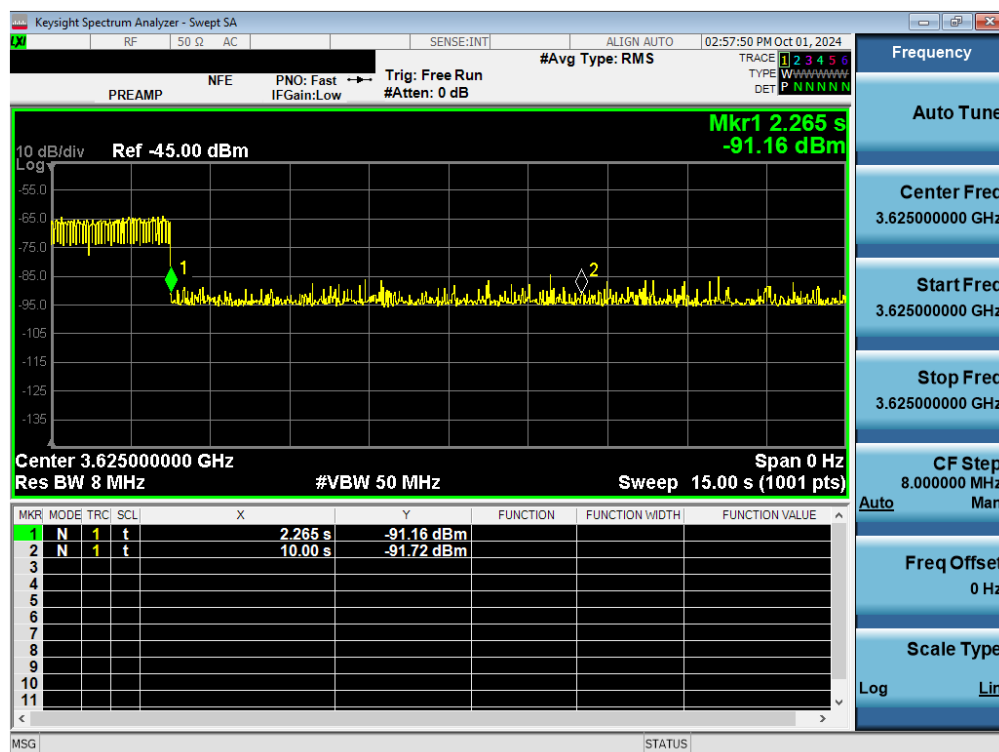

Plot 7-113. Run#1 End User Device Discontinues Operations within 10s

Note:

Marker 1: CBSD sends instructions to discontinue LTE operations.


Marker 2: EUT discontinues operation.

Marker 3: 10 seconds elapsed time from CBSD sending instructions to EUT.

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 111 of 118




Run#2:

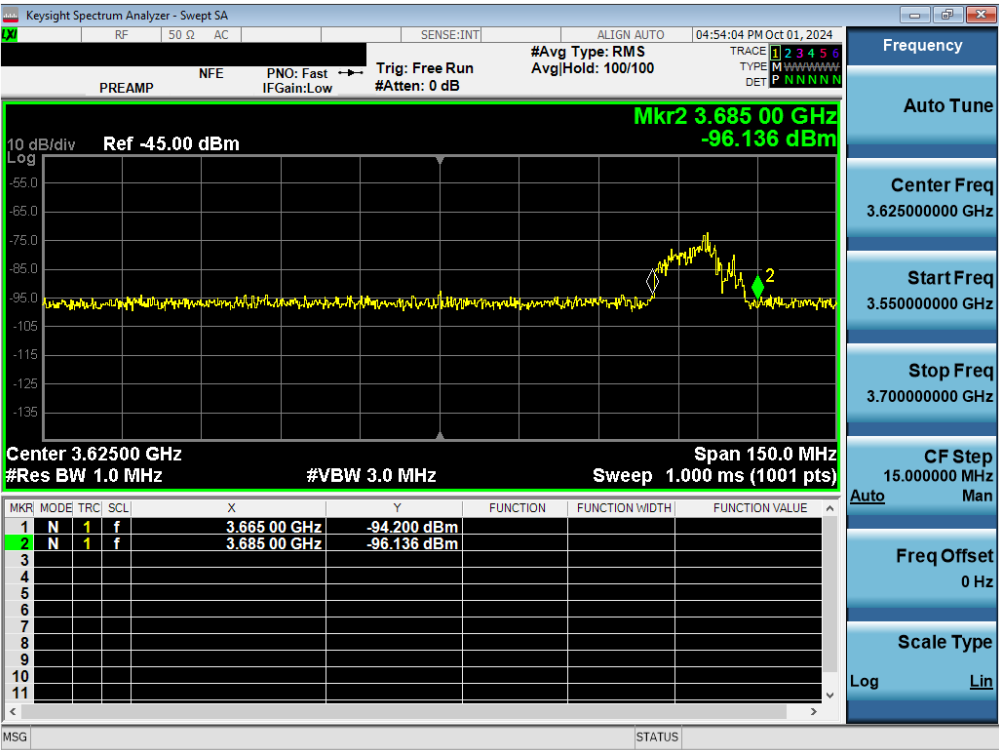

Plot 7-114. Run#2 End User Device Frequency of Operations

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 112 of 118

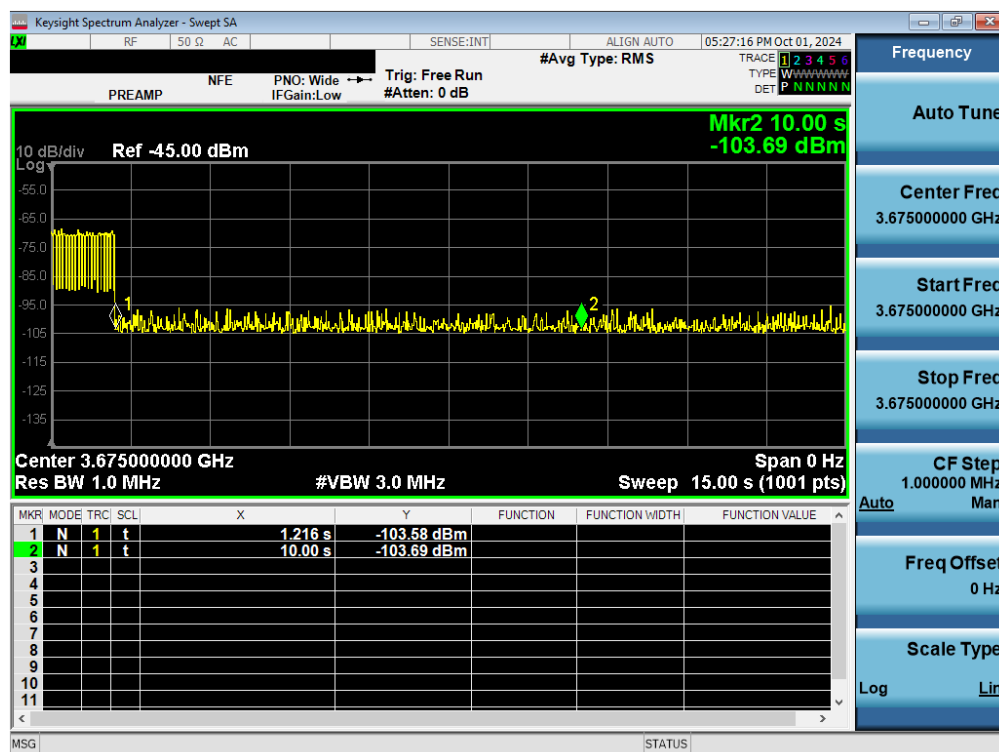

Plot 7-115. Run#2 End User Device Discontinues Operations within 10s

Note:


Marker 1: CBSD sends instructions to discontinue LTE operations.

Marker 2: EUT discontinues operation.

Marker 3: 10 seconds elapsed time from CBSD sending instructions to EUT.


FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 113 of 118

Run#1: NR Band 48

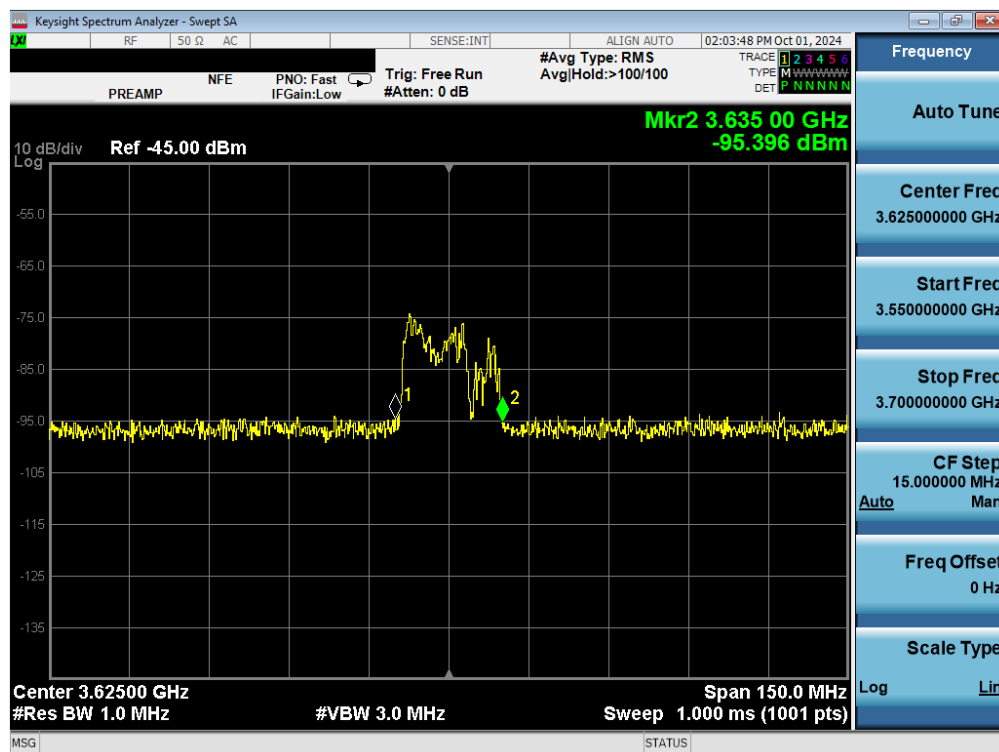

Plot 7-116. Run#1 End User Device Frequency of Operations

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 114 of 118

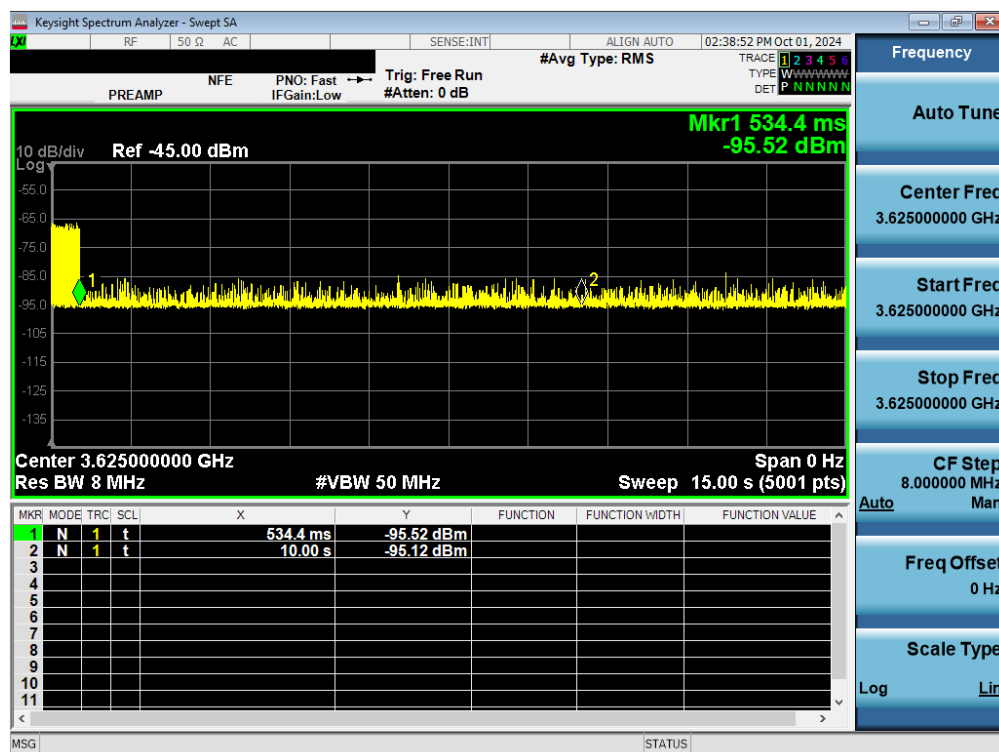

Plot 7-117. Run#1 End User Device Discontinues Operations within 10s

Note:

Marker 1: CBSD sends instructions to discontinue LTE operations.


Marker 2: EUT discontinues operation.

Marker 3: 10 seconds elapsed time from CBSD sending instructions to EUT.

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 115 of 118




Run#2:

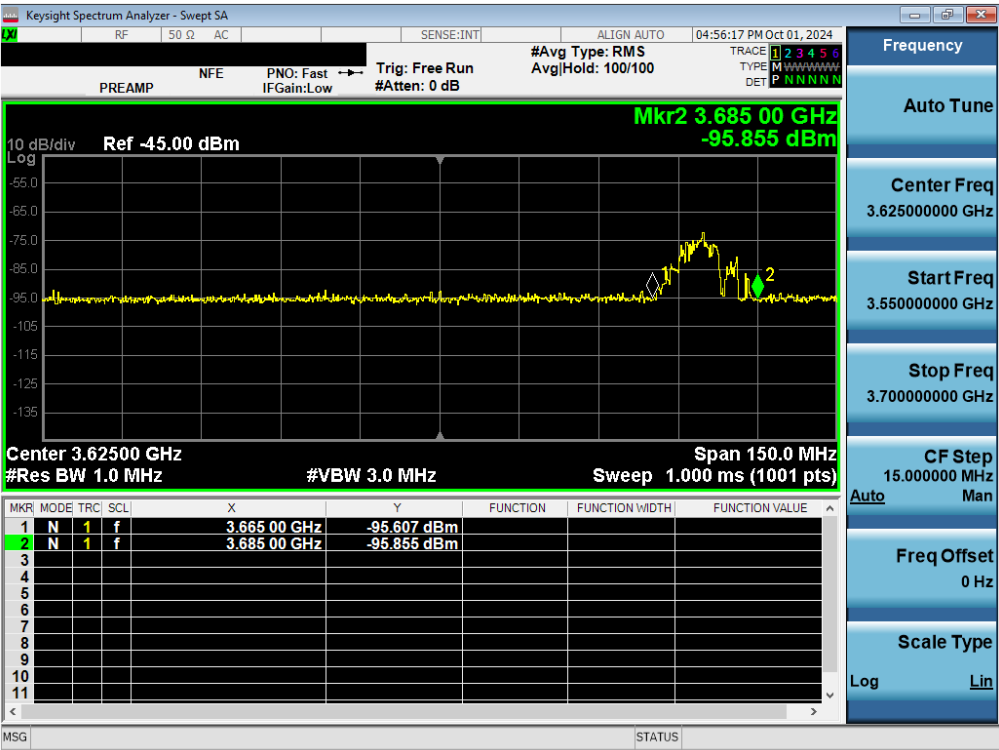

Plot 7-118. Run#2 End User Device Frequency of Operations

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 116 of 118

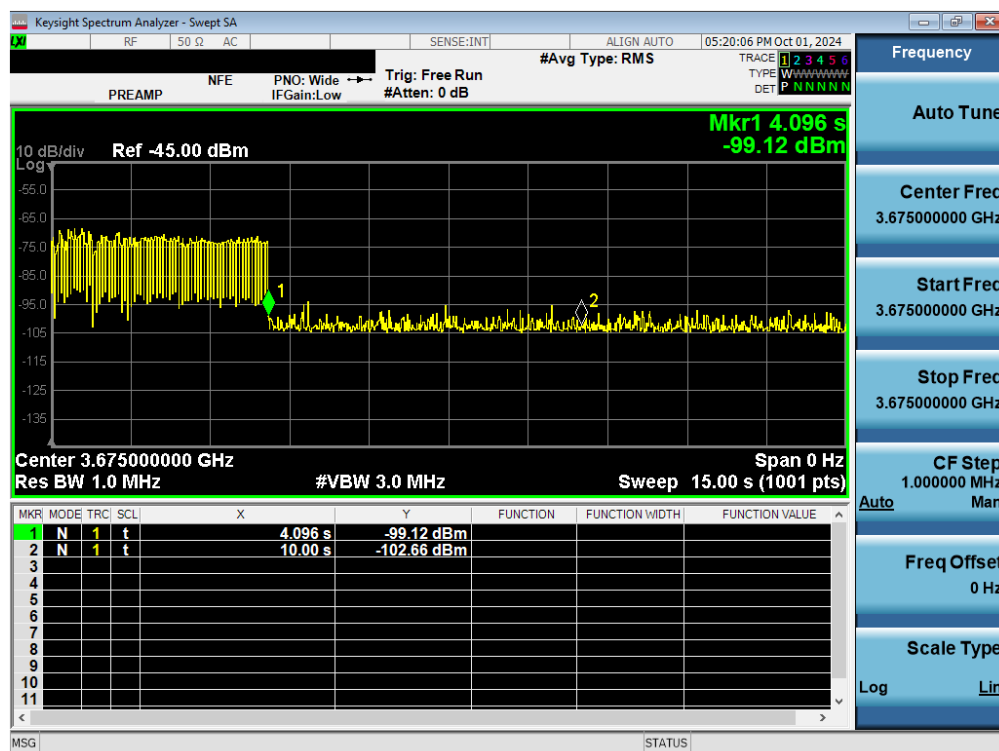

Plot 7-119. Run#2 End User Device Discontinues Operations within 10s

Note:

Marker 1: CBSD sends instructions to discontinue LTE operations.

Marker 2: EUT discontinues operation.

Marker 3: 10 seconds elapsed time from CBSD sending instructions to EUT.

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 117 of 118

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMS936U** complies with all of the End User Device requirements of Part 96 of the FCC Rules for LTE operation only.

FCC ID: A3LSMS936U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260064-07.A3L	Test Dates: 09/03/2024 - 10/25/2024	EUT Type: Portable Handset	Page 118 of 118