



- LPI

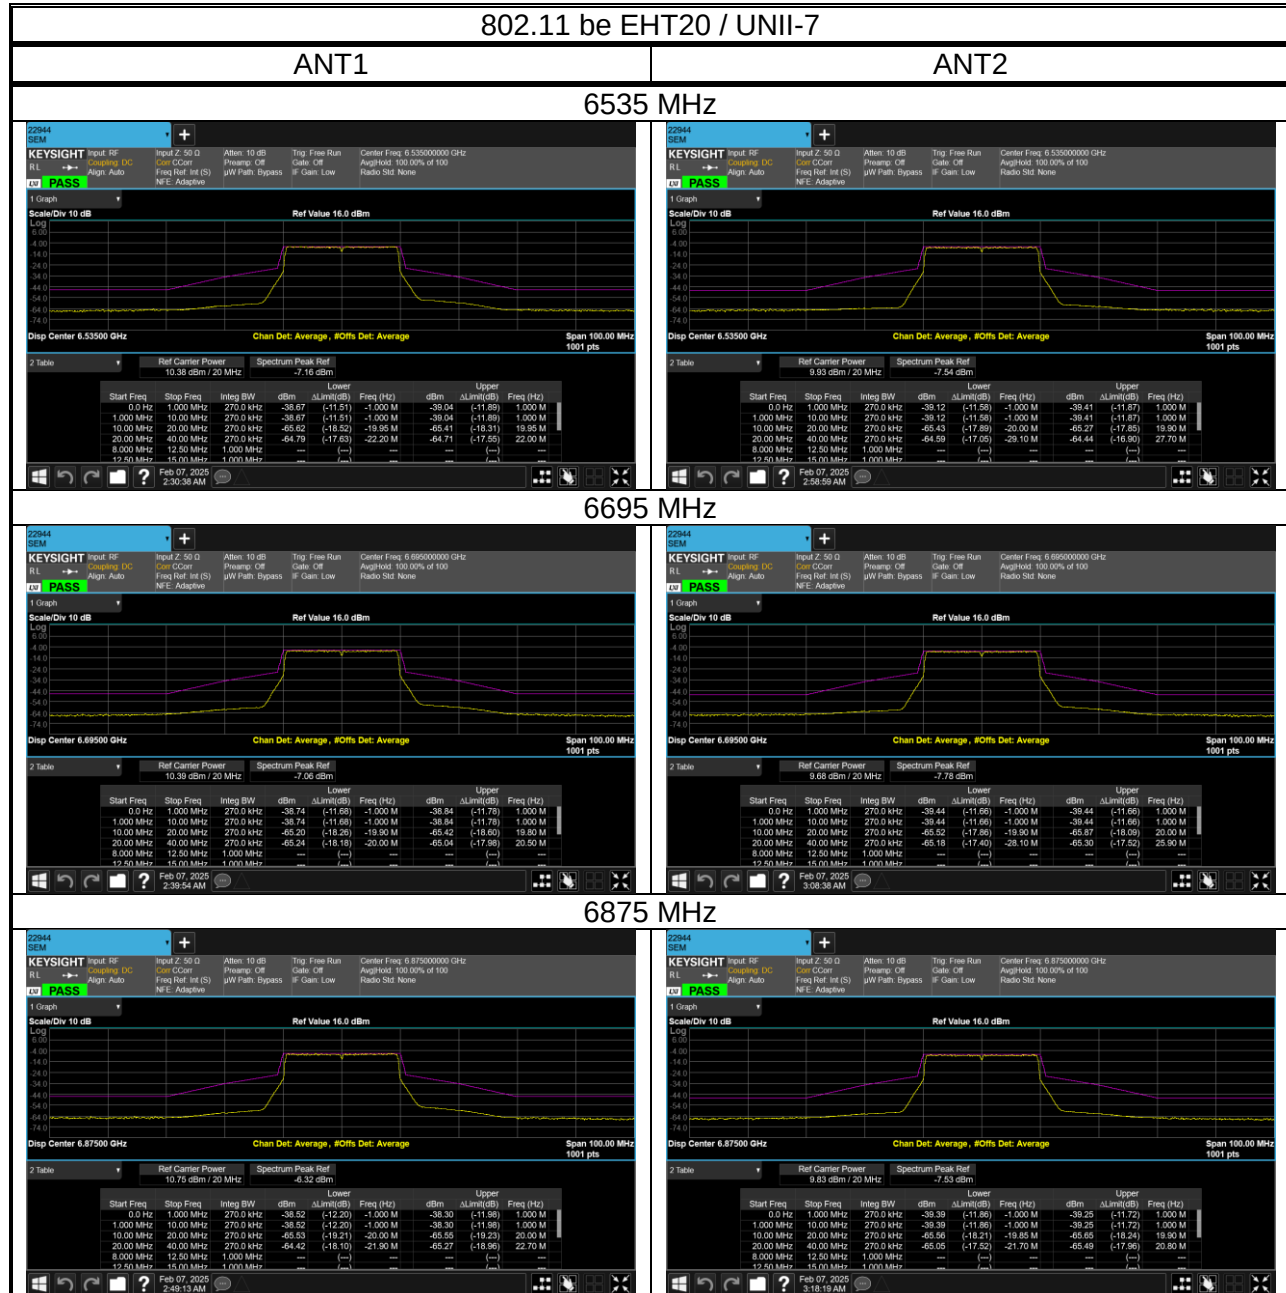

- LPI

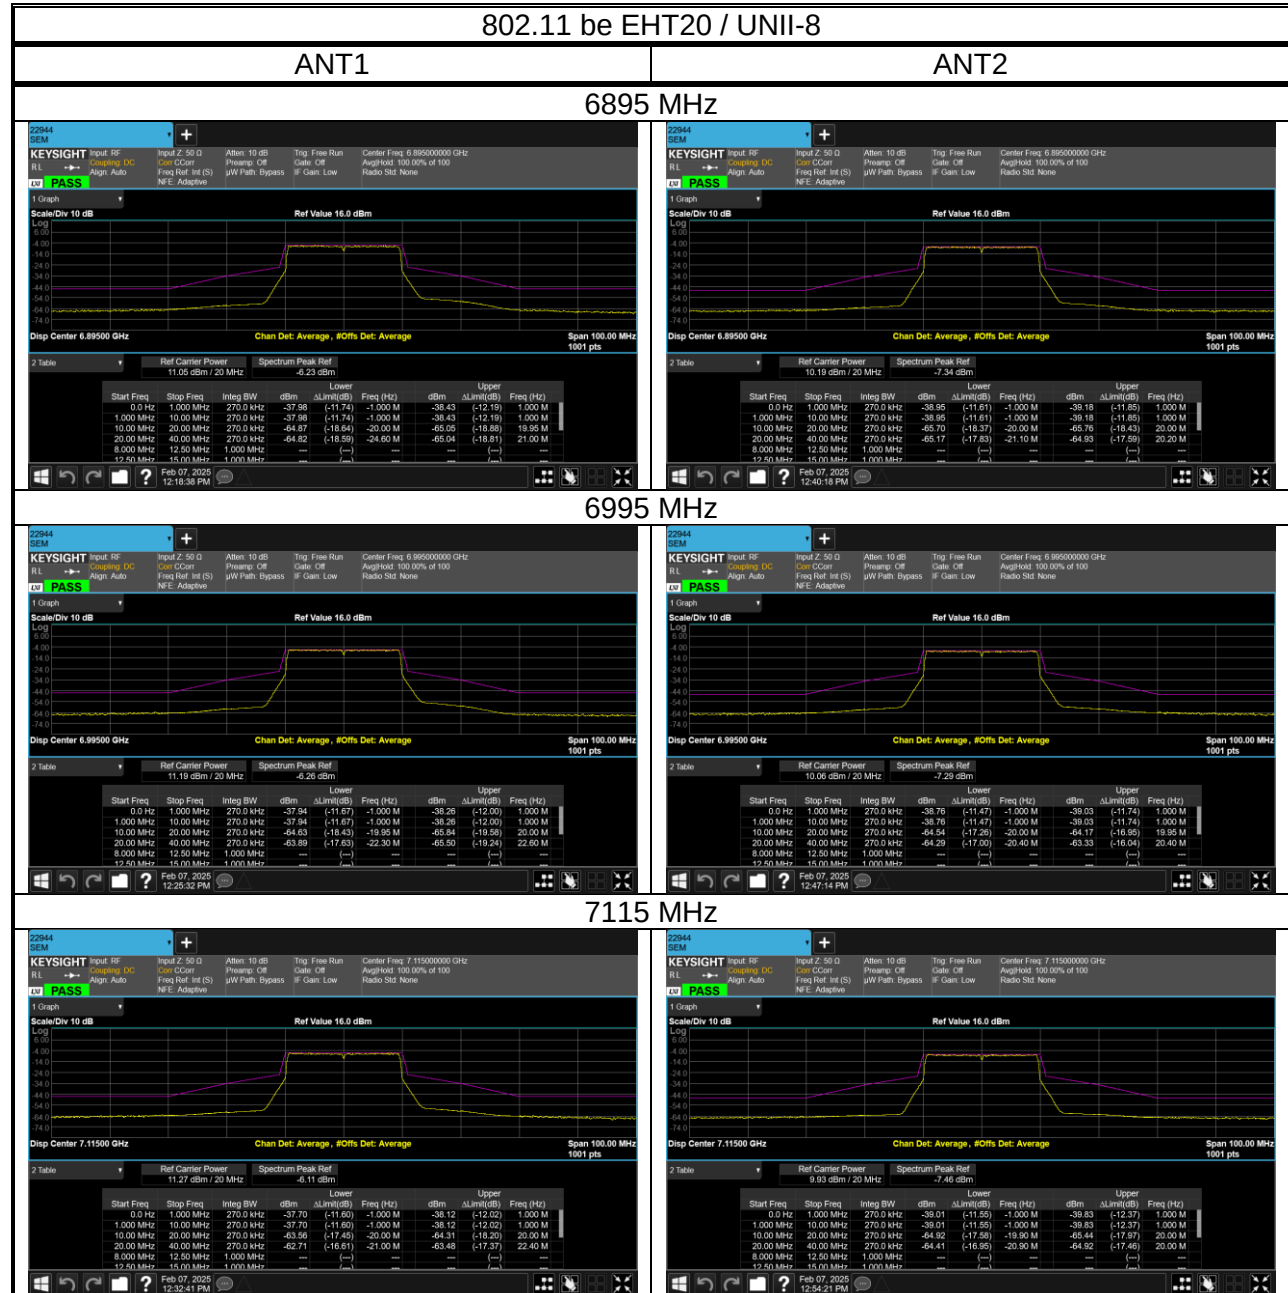

802.11 be EHT20 / UNII-5

ANT2

52944
SEM

KEYSIGHT Input RF: 5.95500 GHz
 Filter BW: 200 kHz
 Span: 100.00 MHz
 Res: 1001 pts
PASS

Input Z: 50 Ohm
 Filter BW: 200 kHz
 Span: 100.00 MHz
 Res: 1001 pts
 REF: Adaptive

Align: Auto
 IF Gain: Low
 Radio Stk: None

Center Freq: 5.95500000 GHz
 AvgMode: 100.00% of 100
 Radio Stk: None

1 Graph
 Scale/Div: 10 dB
 Log
 Ref Value: 16.0 dBm

Chan Det: Average, %0dB Det: Average

Span: 100.00 MHz
 1001 pts

2 Table
 Ref Carrier Power: 13.92 dBm / 20 MHz
 Spectrum Peak Ref: -3.31 dBm

Start Freq	Stop Freq	Integ BW	dBm	Lower dLm(dB)	Upper dUm(dB)	Freq (Hz)	dBm	Freq (Hz)
0.0 MHz	1.000 MHz	270.0 kHz	-35.02	(-11.70)	+1.000 M	-35.58	(+12.27)	1.000 MHz
1.000 MHz	10.00 MHz	270.0 kHz	-35.02	(-11.70)	+1.000 M	-35.58	(+12.27)	1.000 MHz
10.00 MHz	20.00 MHz	270.0 kHz	-42.17	(-16.91)	-19.95 M	-42.77	(-19.46)	20.00 MHz
20.00 MHz	40.00 MHz	270.0 kHz	-41.45	(-16.14)	-21.20 M	-42.47	(-19.16)	40.00 MHz
40.00 MHz	12.50 MHz	1.000 MHz	-	-	-	-	-	-
12.50 MHz	15.00 MHz	1.000 MHz	-	-	-	-	-	-

Feb 08, 2020 8:58:15 PM

KEYSIGHT N9912A SEM

Input 50 Ω
IF **Resolving BW**
Gain Auto
PASS

Attenu: 20 dB
Preamp Off
IF Ref: Int (S)
ME: Adaptive

Trig: Free Run
Gate: Off
IF Gain: Low

Center Freq: 6.17500000 GHz
Amplitude: 100.00% at 100
Radio Std: None

1 Graph
Scale/Div 10 dB
Log
Ref Value 16.0 dBm

Disp Center 6.17500 GHz
Chain Det: Average, 100pts Det: Average
Span 100.00 MHz
1001 pts

2 Table
Ref Carrier Power 14.44 dBm / 20 MHz
Spectrum Peak Ref -2.99 dBm

Start Freq	Stop Freq	Inleg BW	dBm	Lower ΔLm(dB)	Freq (Hz)	dBm	Upper ΔLm(dB)	Freq (Hz)
0.0 MHz	1.000 MHz	270.0 kHz	-34.49	(-11.50)	<1.000 M	-36.18	(-12.19)	1.000 M
1.000 MHz	10.00 MHz	270.0 kHz	-34.49	(-11.50)	<1.000 M	-36.18	(-12.19)	1.000 M
10.00 MHz	20.00 MHz	270.0 kHz	-60.04	(-17.17)	-19.90 M	-60.56	(-17.59)	20.00 M
20.00 MHz	40.00 MHz	270.0 kHz	-59.75	(-16.76)	-23.60 M	-60.07	(-17.08)	20.00 M
40.00 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	—	—
12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	—	—

File **OK** **2025**
8:13:32 PM

72994
SEM

KEYSIGHT Input RF
11.0 GHz
Frequency 10.0
Align Auto
PASS

Input Z: 50 Ω
Low C/Ext
Freq Ref: Int (S)
W/E: Adaptive

Attenu: 20 dB
Preamp: Off
W/F Path: Bypass

Trig: Free Run
Gate: Off
IF Gain: Low

Center Freq: 41.500000 GHz
Span: 100.00% of 100
Radio Std: None

1 Graph
Scale/Div: 10 dB
Log
Ref Value: 16.0 dBm

Disp Center: 40.1500 GHz
Chan Det: Average, %OIB Det: Average


Span: 100.00 MHz
1001 pts

2 Table
Ref Carrier Power: 14.54 dBm / 20 MHz
Spectrum Peak Ref: -2.81 dBm

Start Freq	Stop Freq	Integ BW	dBm	Lower	Frequency	Upper
0.0 Hz	1.000 MHz	270.0 kHz	-34.62	(-11.81)	-1.000 M	-34.85
1.000 MHz	10.000 MHz	270.0 kHz	-34.62	(-11.81)	-1.000 M	-34.85
10.000 MHz	20.000 MHz	270.0 kHz	-61.86	(-19.05)	-20.00 M	-61.79
20.000 MHz	40.000 MHz	270.0 kHz	-61.33	(-18.52)	-21.00 M	-61.69
40.000 MHz	12.500 MHz	1.000 MHz	—	—	—	—
12.500 MHz	15.000 MHz	1.000 MHz	—	—	—	—


Feb 08, 2020
8:23:33 PM

- VLP

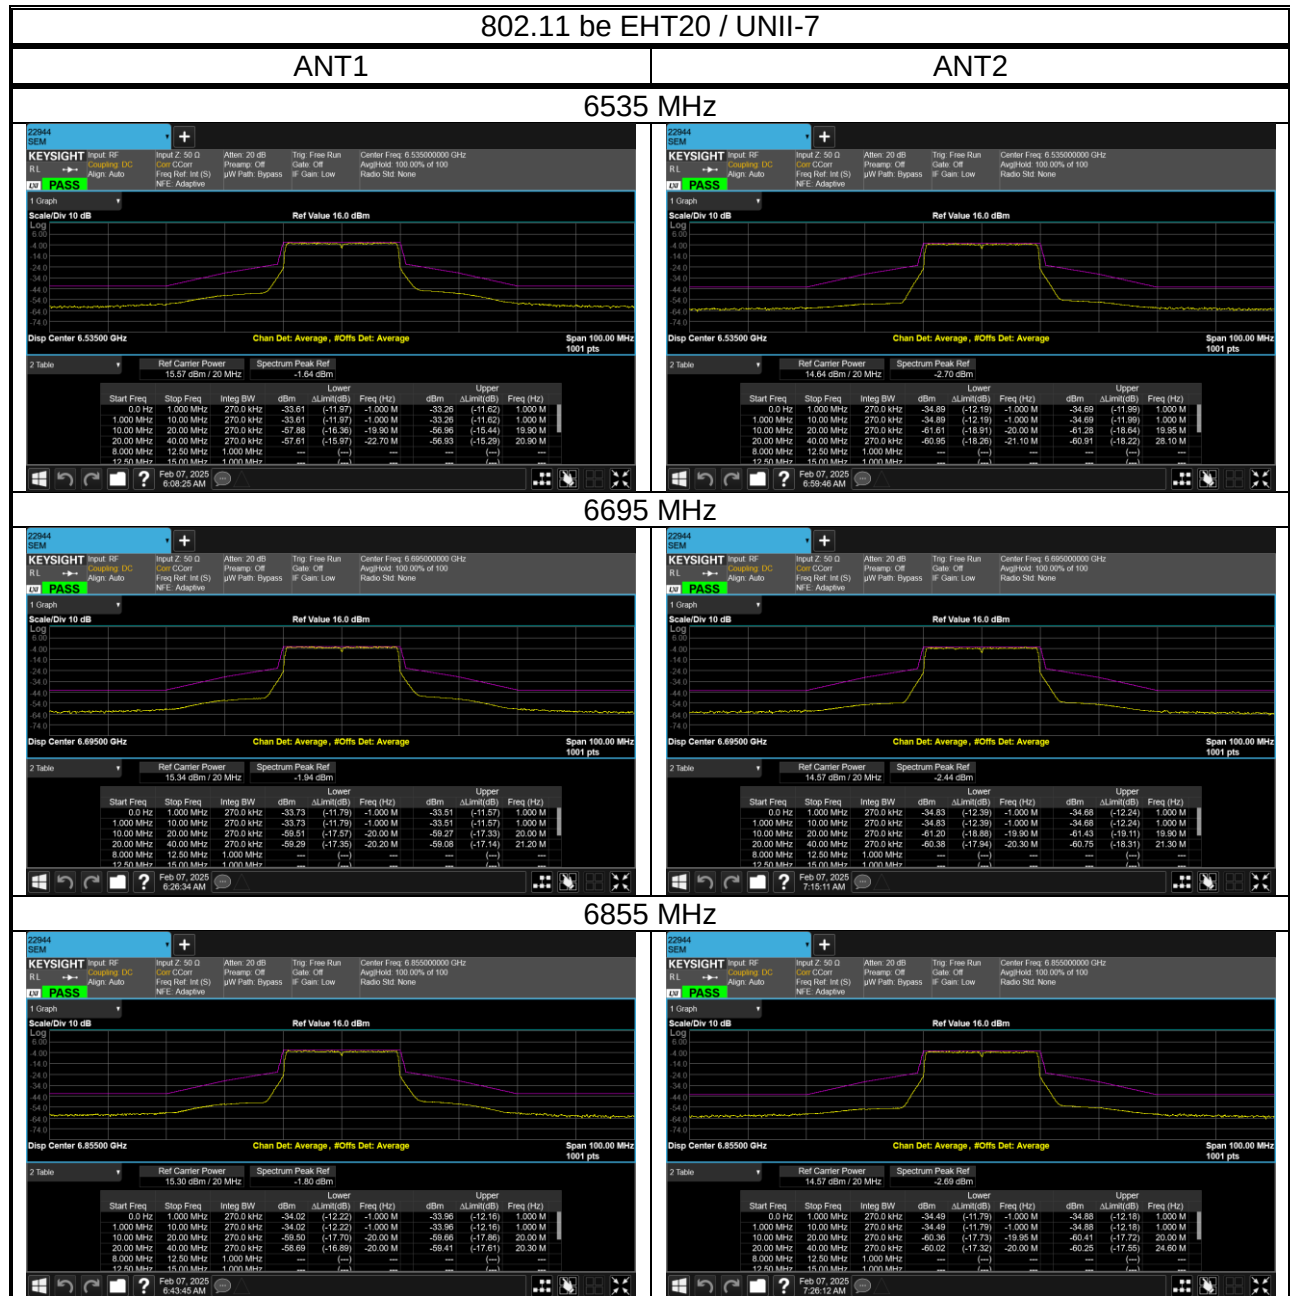


10.2.3. 802.11 be EHT40 SU MODE


- SP

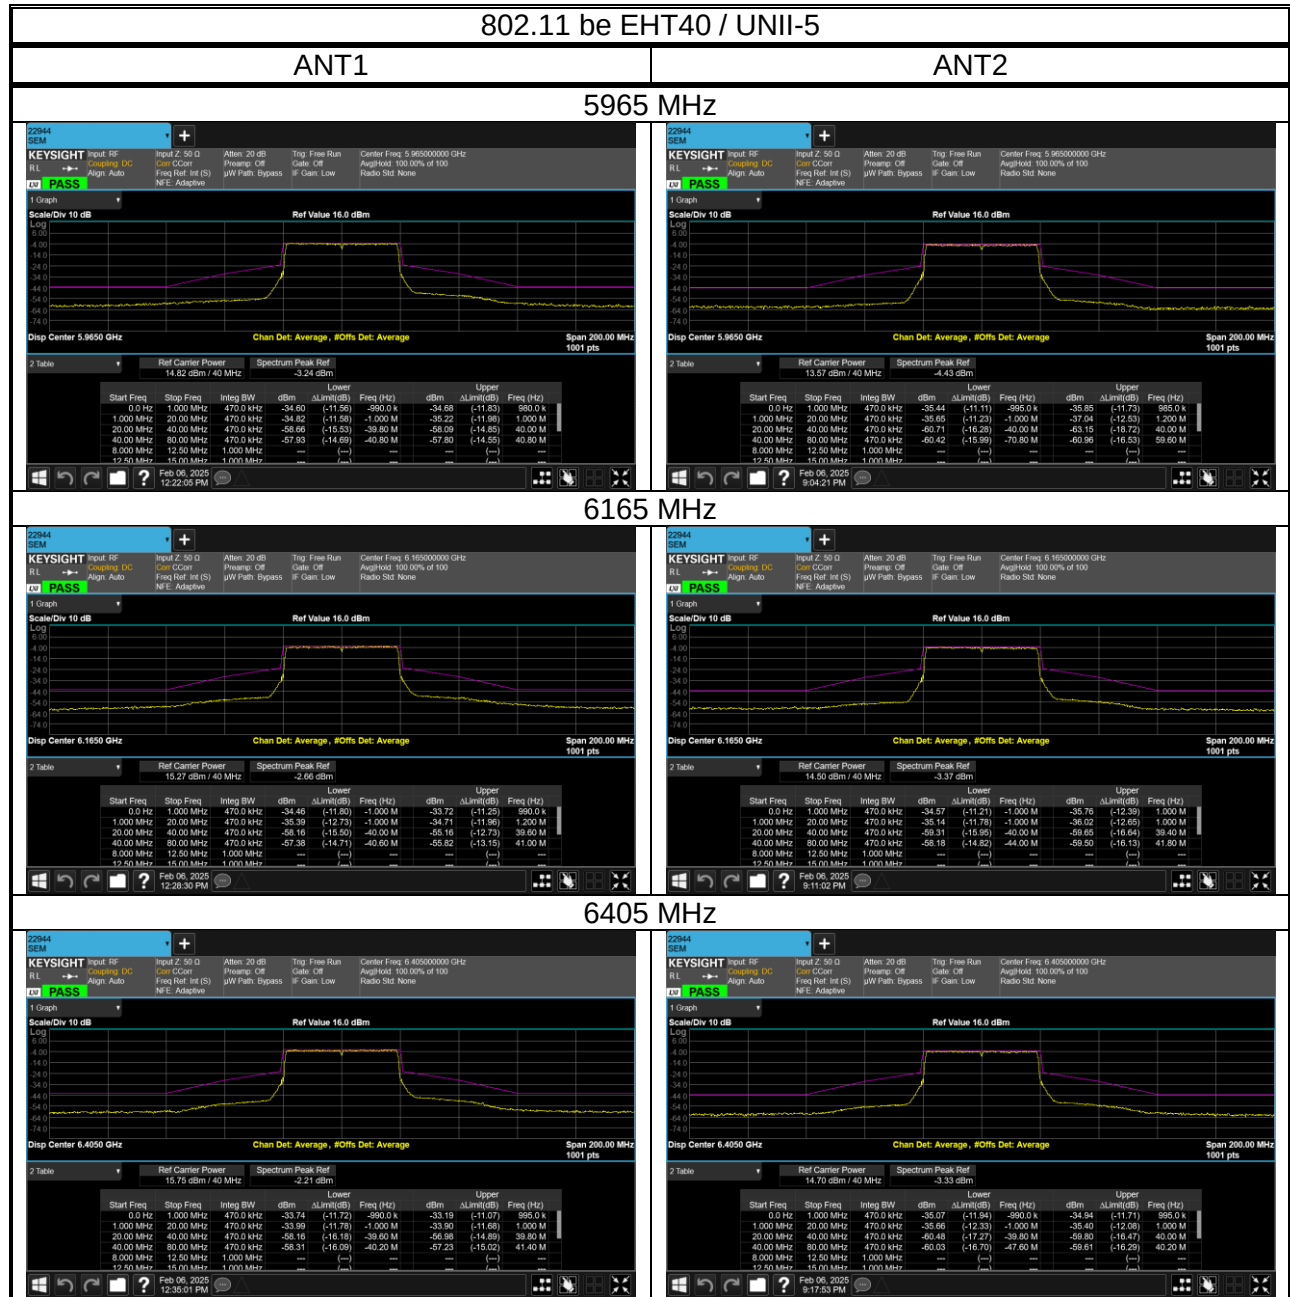


- SP

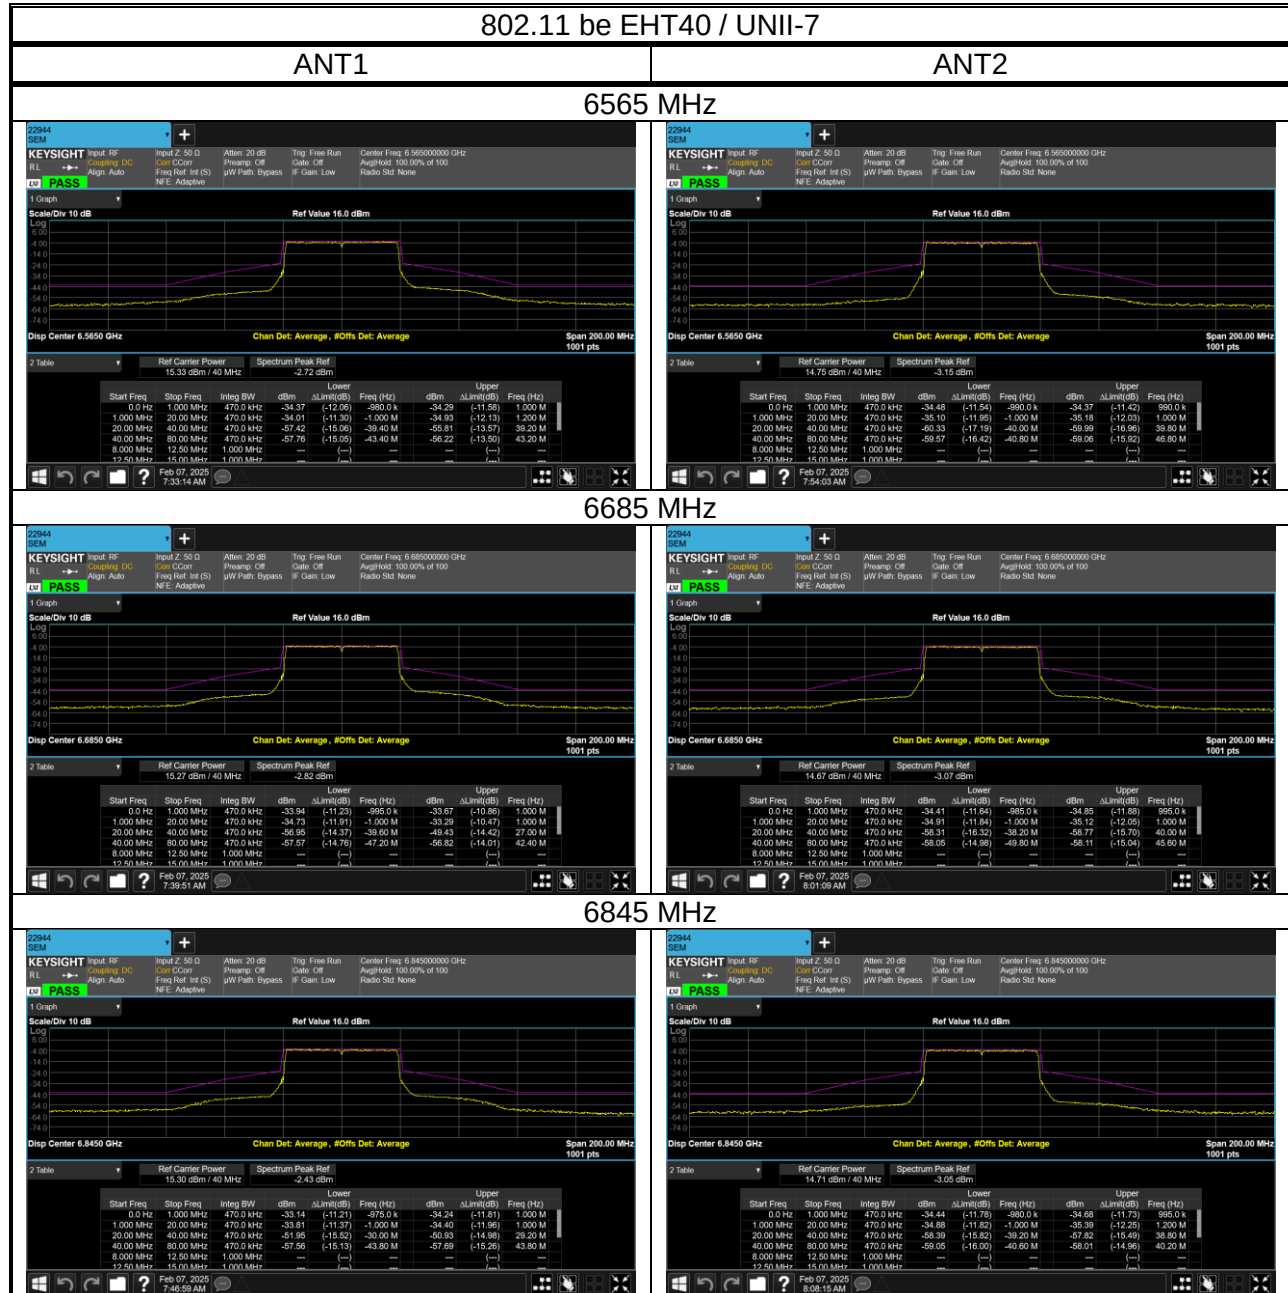


- LPI

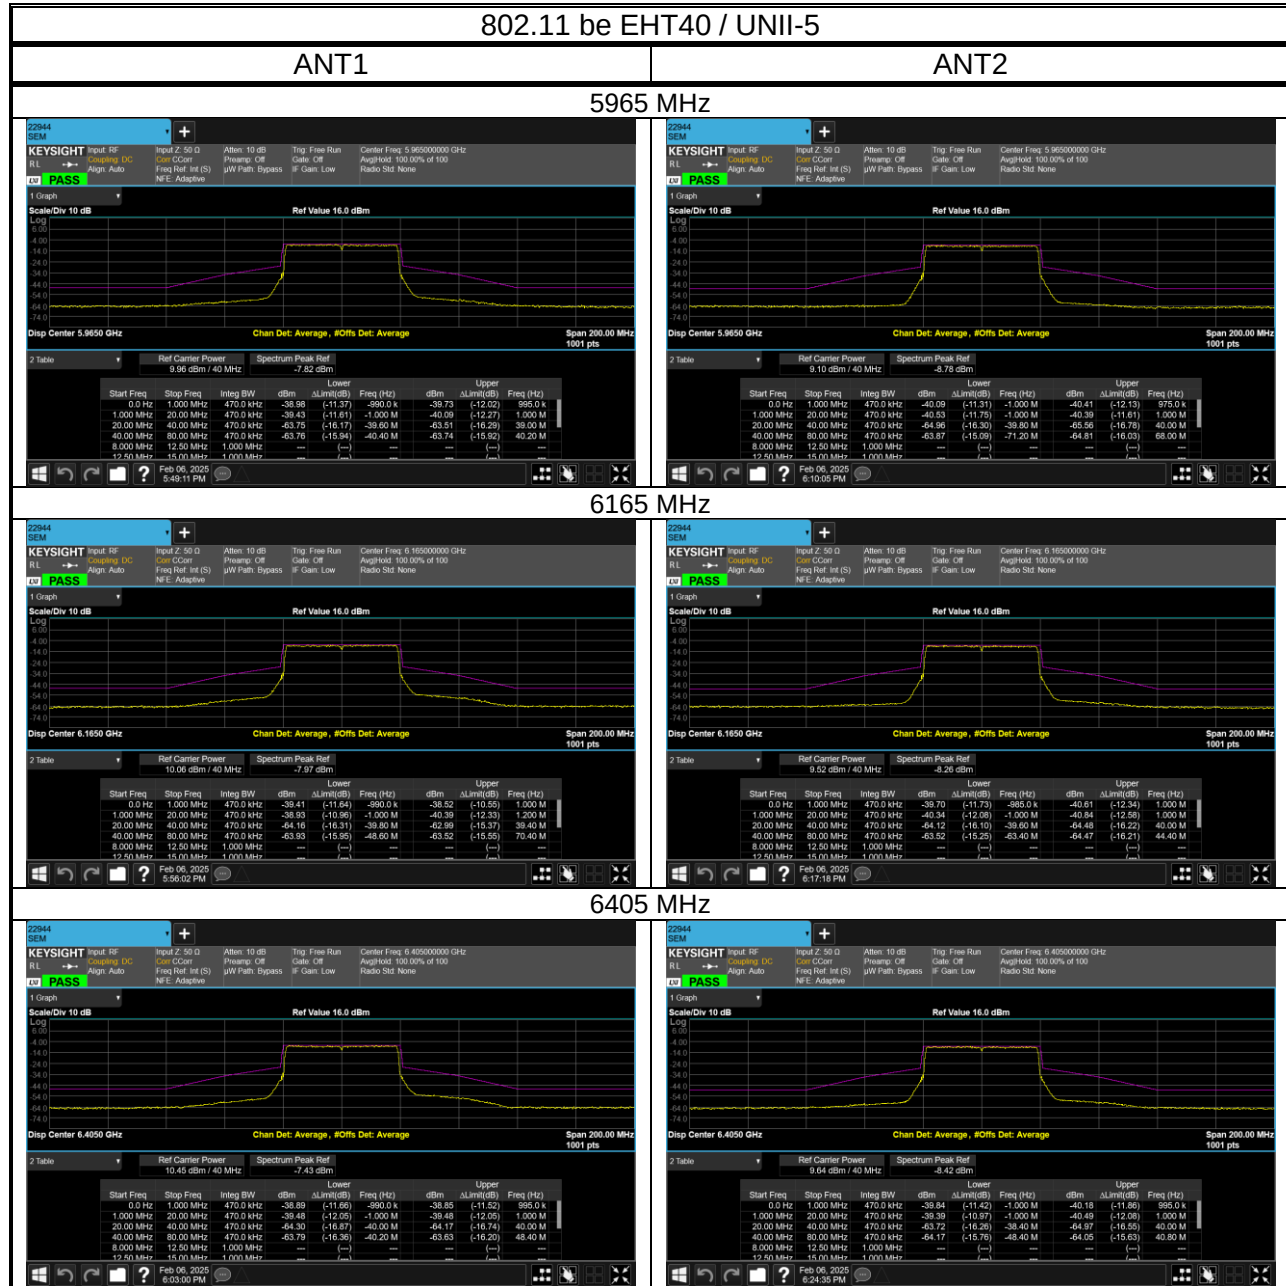


- LPI

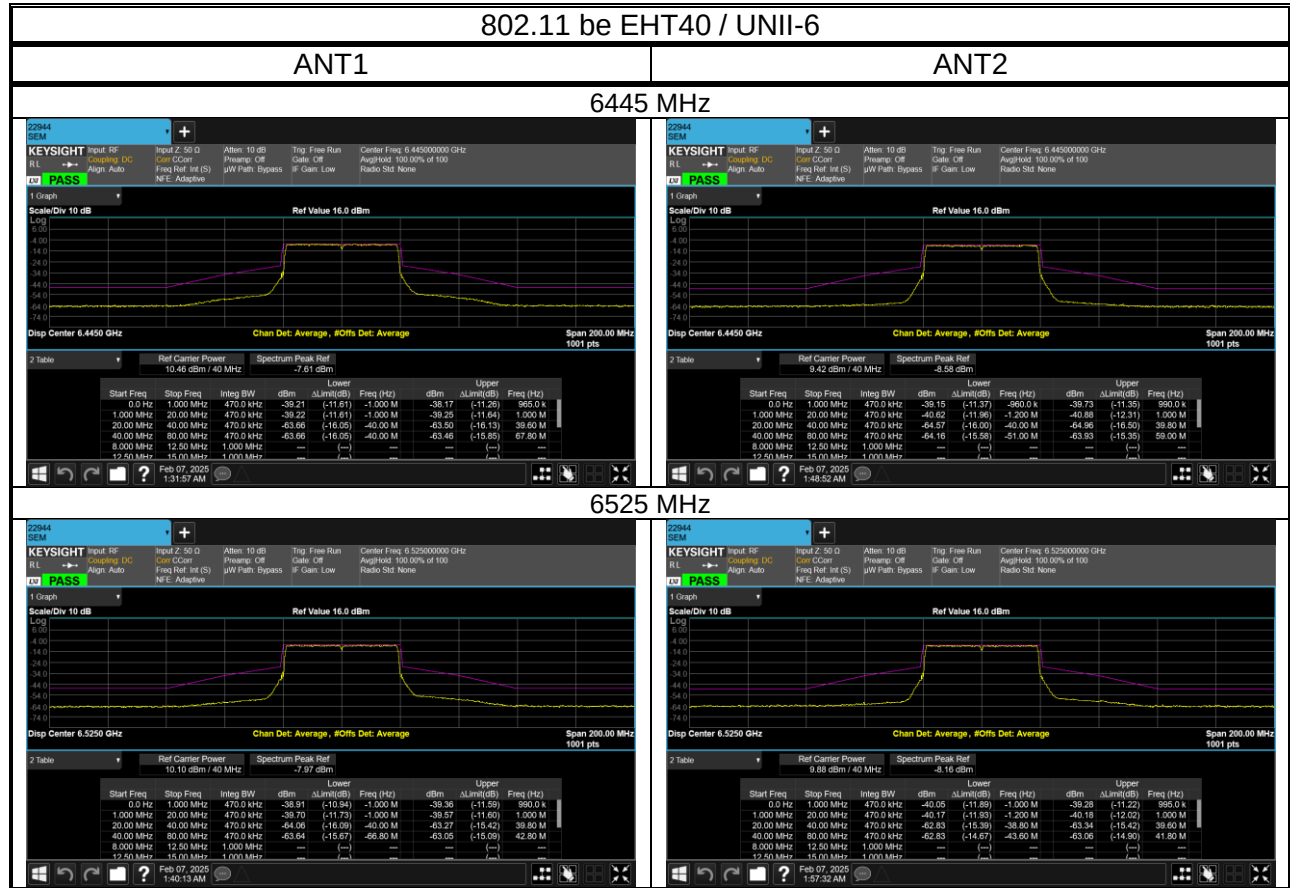


- LPI

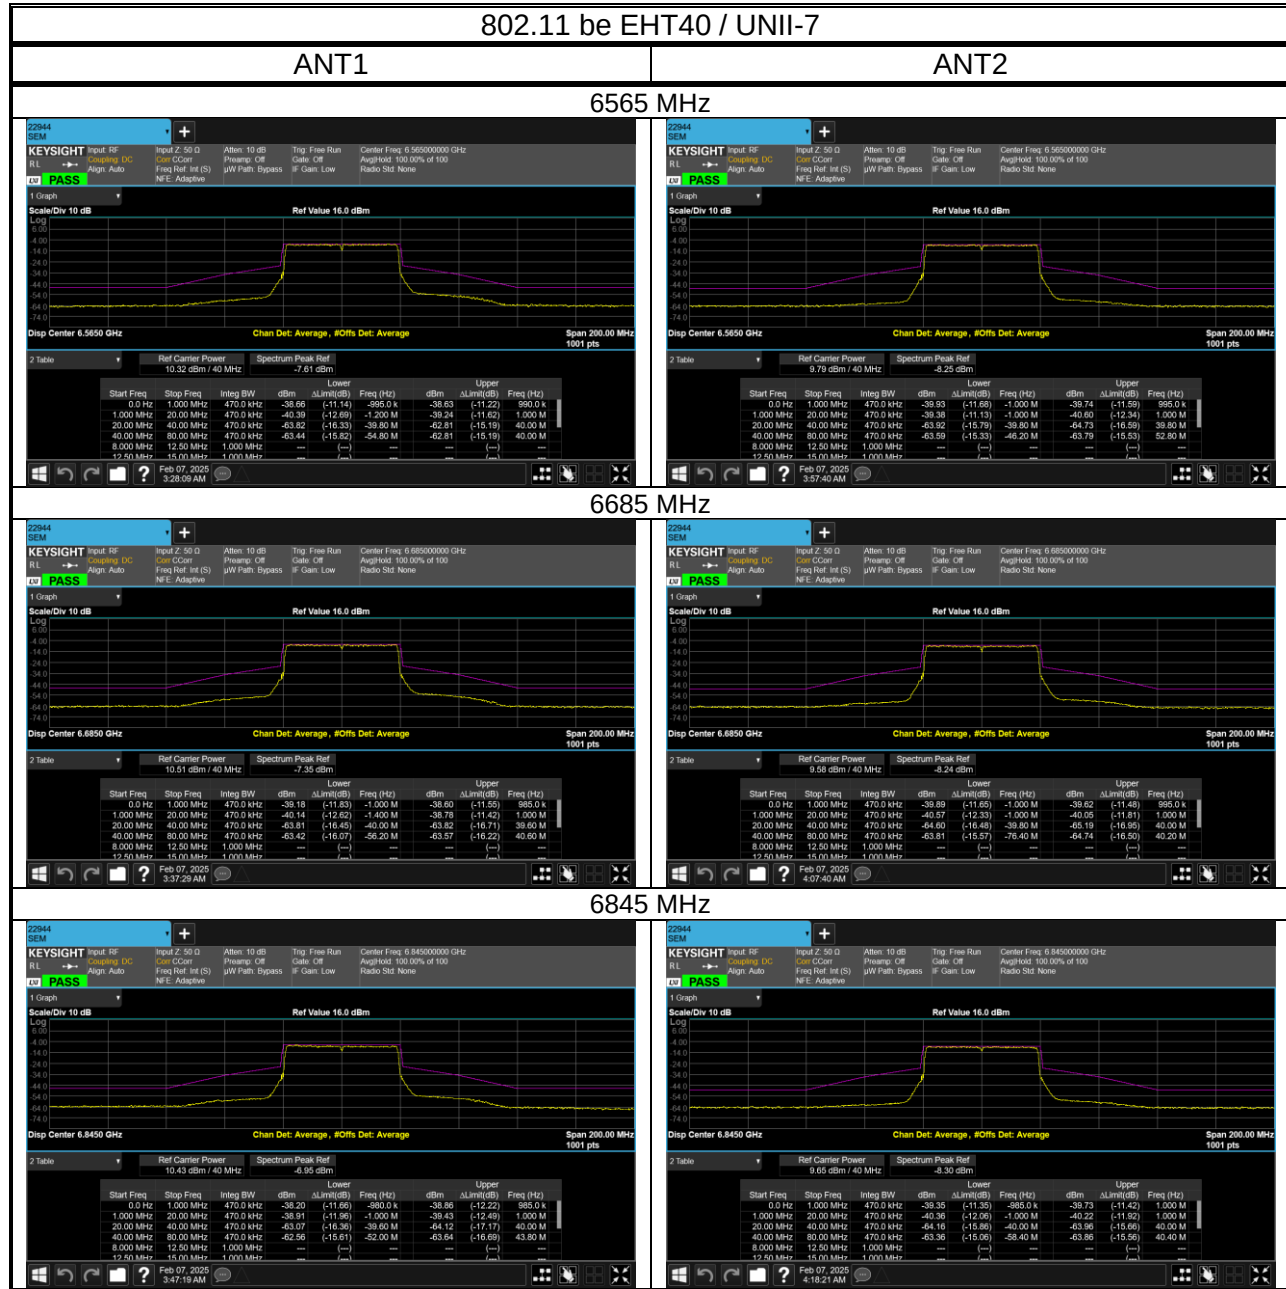


- LPI

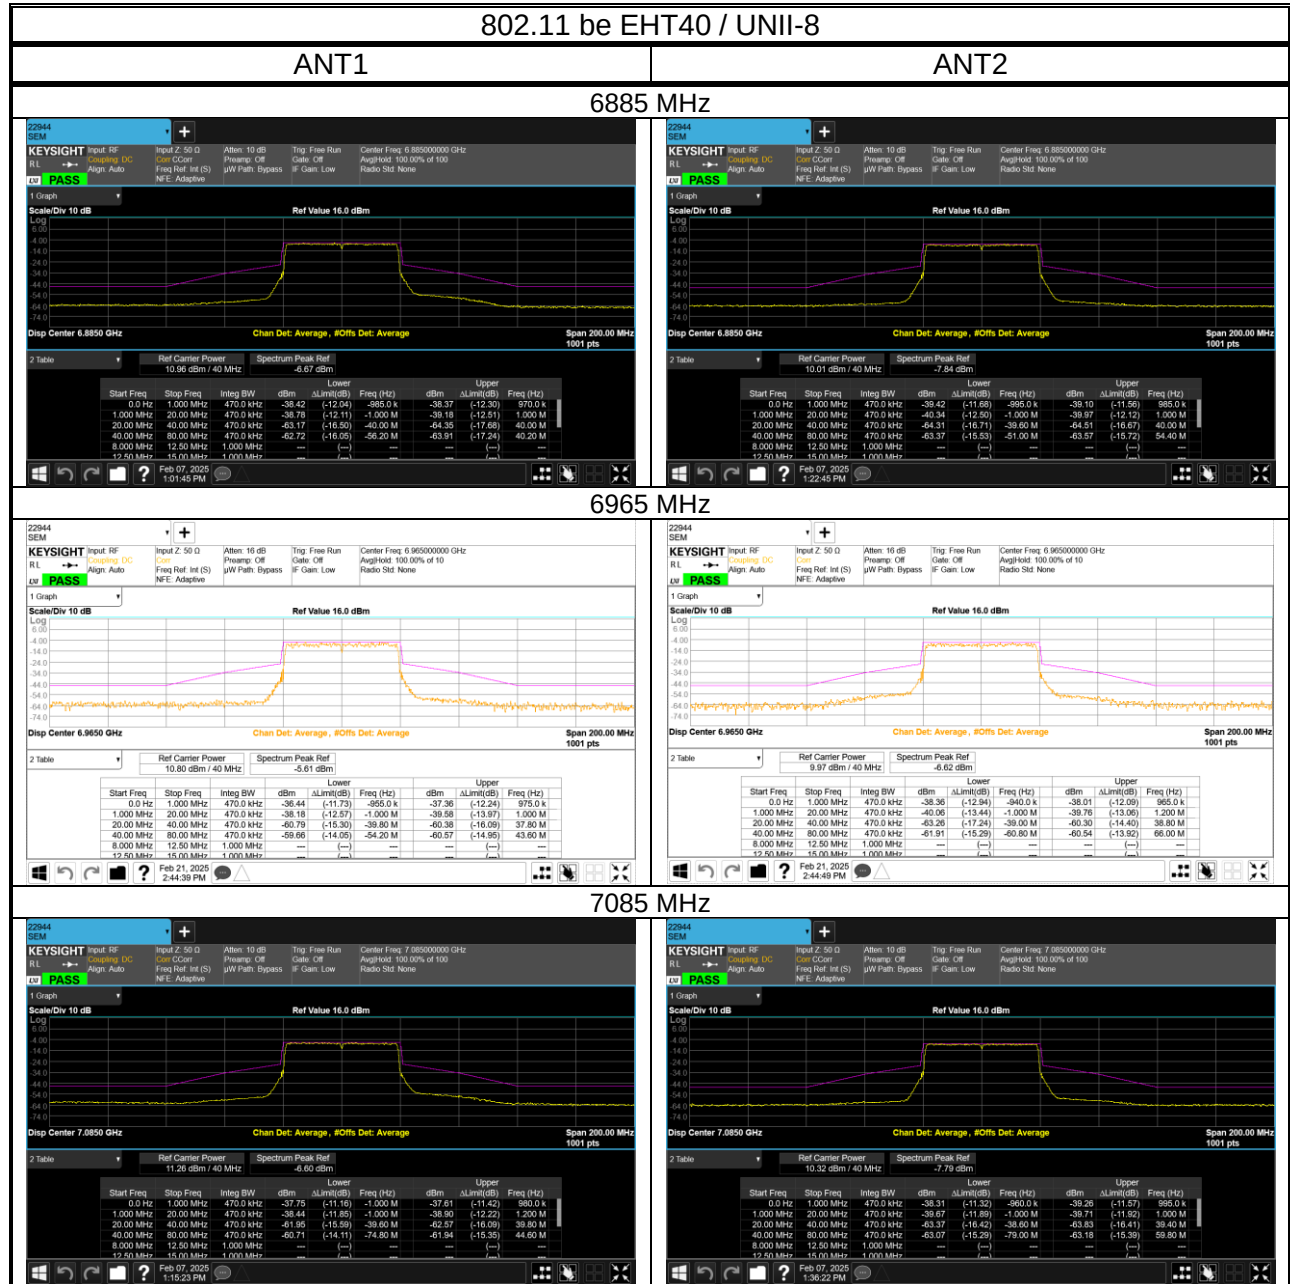

- VLP

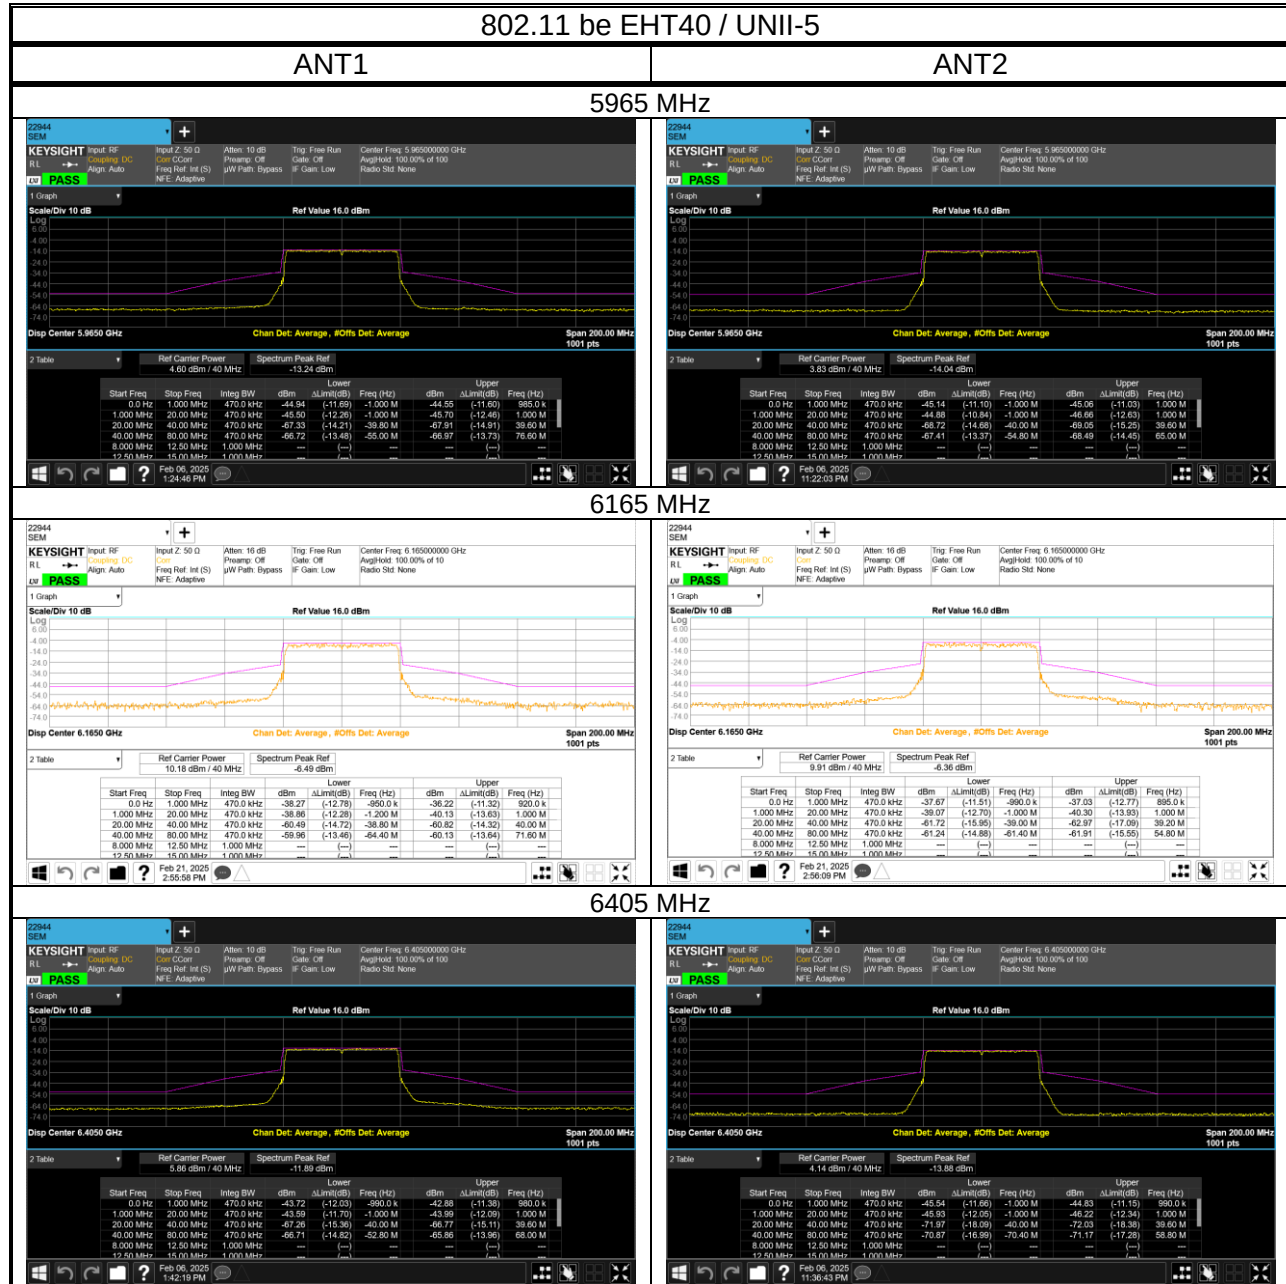

- VLP

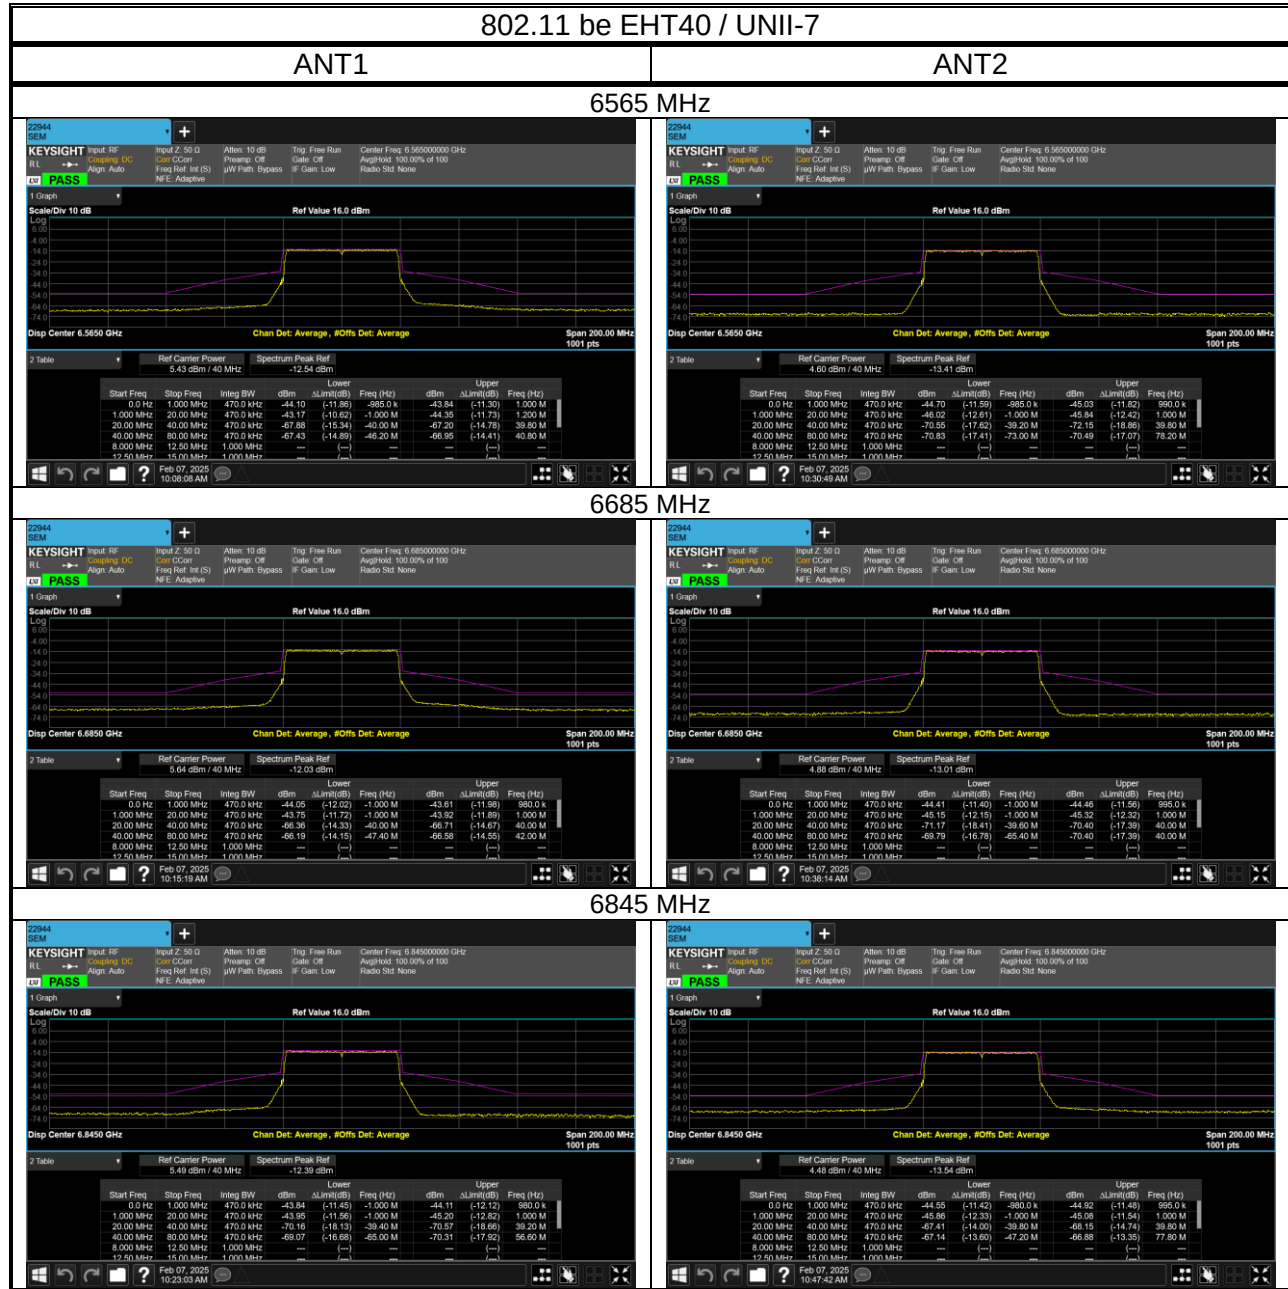

- SP

