

CERTIFICATION TEST REPORT

Report Number. : S-4791615638-E8V2

Applicant : SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Model : SM-S937B/DS, SM-S937B

FCC ID : A3LSMS937B

EUT Description : GSM/WCDMA/LTE/5G NR Phone + BT/BLE,
DTS/UNII a/b/g/n/ac/ax/be, NFC, WPT and UWB

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C

Date Of Issue:
2025-02-28

Prepared by:
UL KOREA LTD.
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL KOREA LTD. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433

Revision History

Rev.	Issue Date	Revisions	Presented By
V1	2025-02-21	Initial issue	Yeonhee Lim
V2	2025-02-28	Updated to address TCB's question	Yeonhee Lim

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY	6
4.4. DECISION RULE	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT	7
5.2. MAXIMUM E-FIELD STRENGTH	7
5.3. WORST-CASE CONFIGURATION AND MODE	7
5.4. DESCRIPTION OF TEST SETUP	8
6. TEST AND MEASUREMENT EQUIPMENT	9
7. 20dB BANDWIDTH	10
8. RADIATED EMISSION TEST RESULTS	11
8.1. LIMITS AND PROCEDURE	11
8.1.1. FUNDAMENTAL AND SPURIOUS EMISSIONS [EUT with passive TAG mode]	13
8.1.2. SPURIOUS EMISSION 0.009 TO 30 MHz [EUT with passive TAG mode]	14
8.1.3. TX SPURIOUS EMISSION 30 TO 1000 MHz [EUT with passive TAG mode]	15
8.1.4. FUNDAMENTAL AND SPURIOUS EMISSIONS [EUT without passive TAG mode]	16
8.1.5. SPURIOUS EMISSION 0.09 TO 30 MHz [EUT without passive TAG mode]	17
8.1.6. TX SPURIOUS EMISSION 30 TO 1000 MHz [EUT without passive TAG mode]	18
9. AC MAINS LINE CONDUCTED EMISSIONS	19
10. FREQUENCY STABILITY	24

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

EUT DESCRIPTION: GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax/be, NFC, WPT and UWB.

MODEL NUMBER: SM-S937B/DS, SM-S937B

SERIAL NUMBER: R3CXC0C2Y9J, R3CXC0C2YFN, R3CXC0C2YWE (CONDUCTED);
R3CXC0C3WGR, R3CXC0C3VSV, R3CXC0C3Y1B (RADIATED)

DATE TESTED: 2025-02-15 ~ 2025-02-21

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
47 CFR Part 15 Subpart C	Complies

UL KOREA LTD. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL KOREA LTD. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL KOREA LTD. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL KOREA LTD. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL KOREA LTD. By:



Seokhwan Hong
Suwon Lab Engineer
UL KOREA LTD.

Tested By:



Yeonhee Lim
Suwon Lab Engineer
UL KOREA LTD.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC 47 CFR Part 2.
2. FCC 47 CFR Part 15.
3. ANSI C63.10-2020.
4. KDB 414788 D01 Radiated Test Site v01r01

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
☒	Chamber 1(3m semi-anechoic chamber)
☒	Chamber 2(3m semi-anechoic chamber)
☐	Chamber 3(3m semi-anechoic chamber)
☐	Chamber 4(3m Full-anechoic chamber)
☐	Chamber 5(3m Full-anechoic chamber)

UL KOREA LTD. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

$$\begin{aligned} \text{Corrected Reading (dBuV)} &= \text{Meter Reading (dBuV)} + \text{External Cable (dB)} + \\ &\text{Cableloss (dB)} \\ 46.62 \text{ dBuV} + 9.8 \text{ dB} + 0.1 \text{ dB} &= 56.52 \text{ dBuV} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Occupied Bandwidth	0.04 %
Frequency Stability	5.3×10^{-8} Hz
Conducted Disturbance, 0.15 to 30 MHz	1.84 dB
Radiated Disturbance, 9 kHz to 30 MHz	2.41 dB
Radiated Disturbance, 30 MHz to 1 GHz	3.69 dB

Uncertainty figures are valid to a confidence level of 95%.

4.4. DECISION RULE

Decision rule for statement(s) of conformity is based on Clause 4.4.3 in IEC Guide 115:2023.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax/be, NFC, WPT and UWB. This test report addresses the DXX (NFC) operational mode.

Representative model	Difference	Derivative model
		SM-S937B
SM-S937B/DS	Hardware	Different Sim Tray
	Software	Same as SM-S937B/DS

The model SM-S937B/DS was used for final testing and is representative of the test results in this report.

5.2. MAXIMUM E-FIELD STRENGTH

The testing was performed at 3 meter. The transmitter maximum E-field at 30m distance is 9.38 dBuV/m which convert from 3 meter data.

5.3. WORST-CASE CONFIGURATION AND MODE

The NFC function was tested at its' fundamental and only operational frequency of 13.56 MHz.

Worst case of antenna axis:

NFC with tag mode	NFC without tag mode
Y	Y

The fundamental level of the EUT was investigated each type and bitrate.
All test was performed worst case condition.

- ISO/IEC 14443-A(Type A) and bit rate 106 kbps

Radiated(fundamental level and spurious emissions) tests were performed both without reading a passive tag condition[test mode] and with reading a passive tag condition.

5.4. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT


Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-T2510	RF7X1YF85Z1DKA	N/A
Data Cable	SAMSUNG	EP-DA705	N/A	N/A

I/O CABLE

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0 m	N/A

The EUT is a stand-alone device configured and tested in a worst-case setup.

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

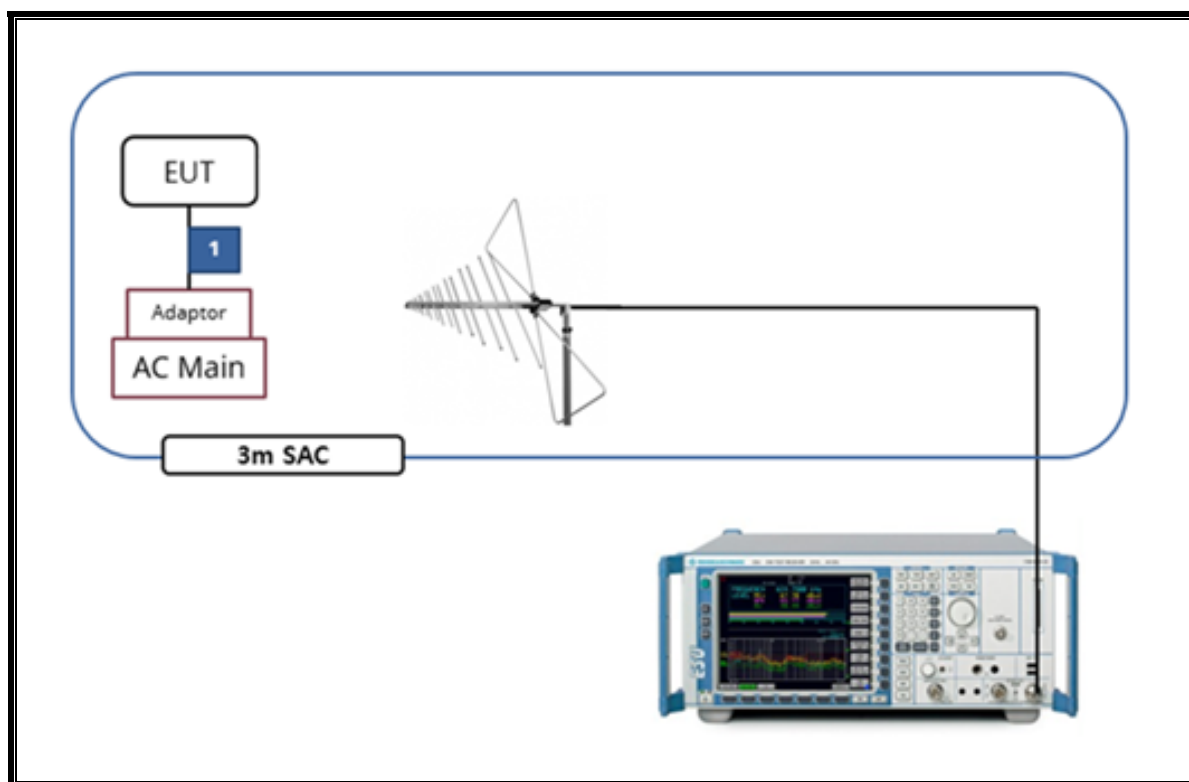

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB 9163	845	2026-07-30
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB 9163	749	2026-08-12
Preamplifier, 1000 MHz	Sonoma	310N	341282	2025-07-22
Preamplifier, 1000 MHz	Sonoma	310N	351741	2025-07-22
Spectrum Analyzer, 7 GHz	Agilent / HP	N9010A	MY54200580	2025-07-23
Spectrum Analyzer, 44 GHz	KEYSIGHT	N9030B	MY57143652	2025-07-22
EMI Test Receive, 3 GHz	R&S	ESR 3	101832	2025-07-22
DC Power Supply	Agilent / HP	E3640A	MY54226395	2025-07-24
Temperature Chamber	ESPEC	SH-642	93001109	2025-07-23
LISN	R&S	ENV216	101836	2025-07-22
LISN	R&S	ENV216	101837	2025-07-22
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2E	100900	2025-07-25
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

7. 20dB BANDWIDTH

LIMITS

§15.215

(c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated

§15.225

Operation within the band 13.110 – 14.010MHz


TEST PROCEDURE

The spectrum analyzer connected receive antenna and the EUT placed on near the receive antenna. The RBW is set to 1-5% of emission BW. The VBW is set to 3 times the RBW. The sweep time is coupled.

RESULTS

Frequency [MHz]	20 dB Bandwidth [kHz]
13.56	439

20dB Bandwidth Plot

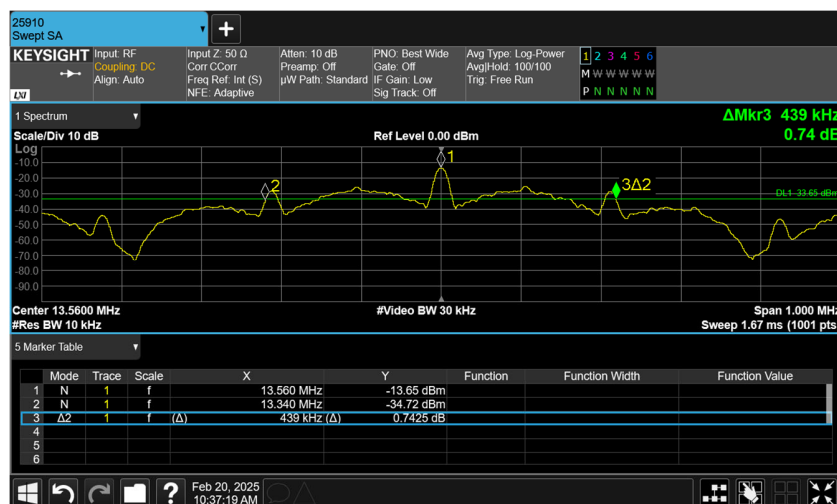

8. RADIATED EMISSION TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMIT

§15.225

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/ meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110– 14.010 MHz and shall not exceed the general radiated emission limits in § 15.209 as follows:

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

Formula for converting the filed strength from uV/m to dBuV/m is:

Limit (dBuV/m) = 20 log limit (uV/m)

In addition:

§15.209 (d) The emission limits shown the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

§15.209 (d) The provisions in §§ 15.225, measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.

TEST PROCEDURE

ANSI C63.10-2020


The EUT is an intentional radiator that incorporates a digital device. The highest fundamental frequency generated or used in the device is 13.56 MHz. The frequency range was investigated from 0.15 MHz to the 10th harmonic of the highest fundamental frequency, or 1000 MHz, whichever is greater (1000MHz)

- a) Set the RBW = 100 Hz for the emissions below 150kHz
9 kHz for the emissions between 150kHz and 30MHz
(The minimum RBW setting value for the Spectrum analyzer is 10 kHz)
100 kHz for the emissions between 30MHz and 1GHz
(The minimum RBW setting value for the Spectrum analyzer is 120 kHz)
- b) Set VBW $\geq 3 \times$ RBW;
- c) Sweep time = Auto;
- d) Detector = Peak;
- e) Trace mode = Max Hold;

RESULTS

No non-compliance noted:

8.1.1. FUNDAMENTAL AND SPURIOUS EMISSIONS [EUT with passive TAG mode]

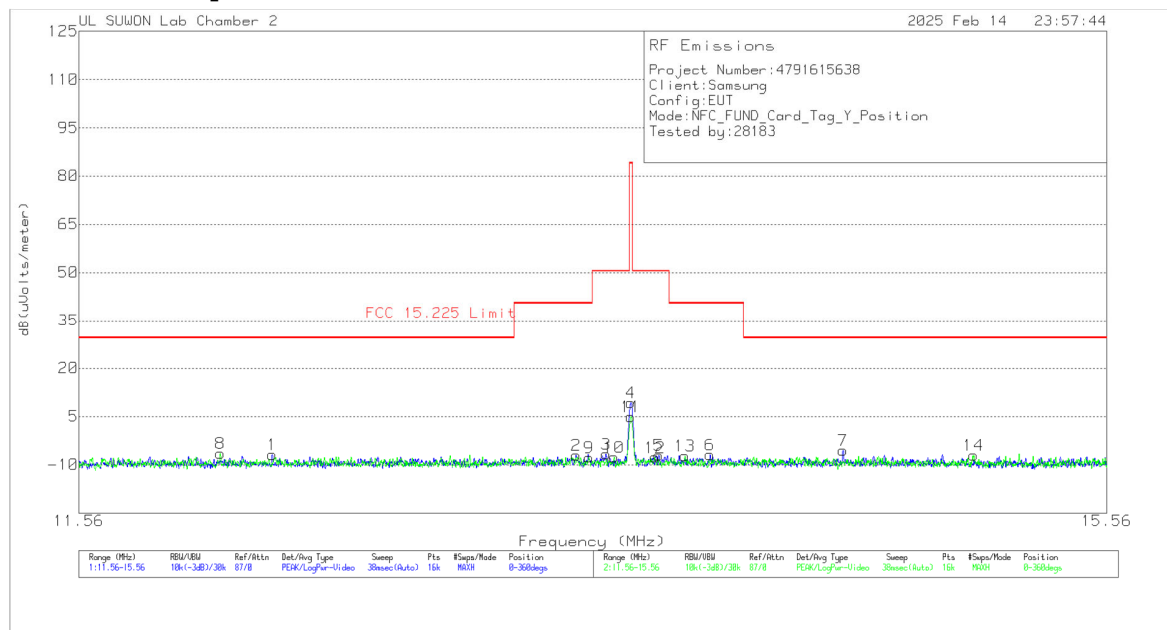

Trace Markers Face on

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Antenna Correction Factor(dB/m)	Dist Corr 30m[dB]	Cable Loss[dB]	Corrected Reading (dBuV/m)	FCC 15.225 Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
1	12.22463	12.53	Pk	20.2	-40	.5	-6.77	29.54	-36.31	0-360
2	13.34663	12.38	Pk	20.1	-40	.5	-7.02	40.51	-47.53	0-360
3	13.46238	12.69	Pk	20.1	-40	.5	-6.71	50.5	-57.21	0-360
**4	13.56	28.78	Pk	20.1	-40	.5	9.38	84	-74.62	0-360
5	13.66988	12.27	Pk	20.1	-40	.6	-7.03	50.5	-57.53	0-360
6	13.87438	12.41	Pk	20.1	-40	.6	-6.89	40.51	-47.4	0-360
7	14.41763	13.89	Pk	20.1	-40	.6	-5.41	29.54	-34.95	0-360

Face off

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Antenna Correction Factor(dB/m)	Dist Corr 30m[dB]	Cable Loss[dB]	Corrected Reading (dBuV/m)	FCC 15.225 Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
8	12.04213	12.82	Pk	20.2	-40	.5	-6.48	29.54	-36.02	0-360
9	13.39613	11.72	Pk	20.1	-40	.5	-7.68	40.51	-48.19	0-360
10	13.49513	11.75	Pk	20.1	-40	.5	-7.65	50.5	-58.15	0-360
**11	13.56	24.34	Pk	20.1	-40	.5	4.94	84	-79.06	0-360
12	13.65425	11.63	Pk	20.1	-40	.6	-7.67	50.5	-58.17	0-360
13	13.77363	12.05	Pk	20.1	-40	.6	-7.25	40.51	-47.76	0-360
14	14.97313	12.31	Pk	20.1	-40	.6	-6.99	29.54	-36.53	0-360

Pk - Peak detector


**Fundamental

Note 1 : Although these tests were performed other than open filed test site, adequate comparison measurements were confirmed against 30 m open test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Note 2: Radiated test were investigated with three receiving antenna axes: Face-on, Face-off and horizontal (parallel to the ground plane) and the worse orientations of Face-on and Face-off were set for final test.

8.1.2. SPURIOUS EMISSION 0.009 TO 30 MHz [EUT with passive TAG mode]

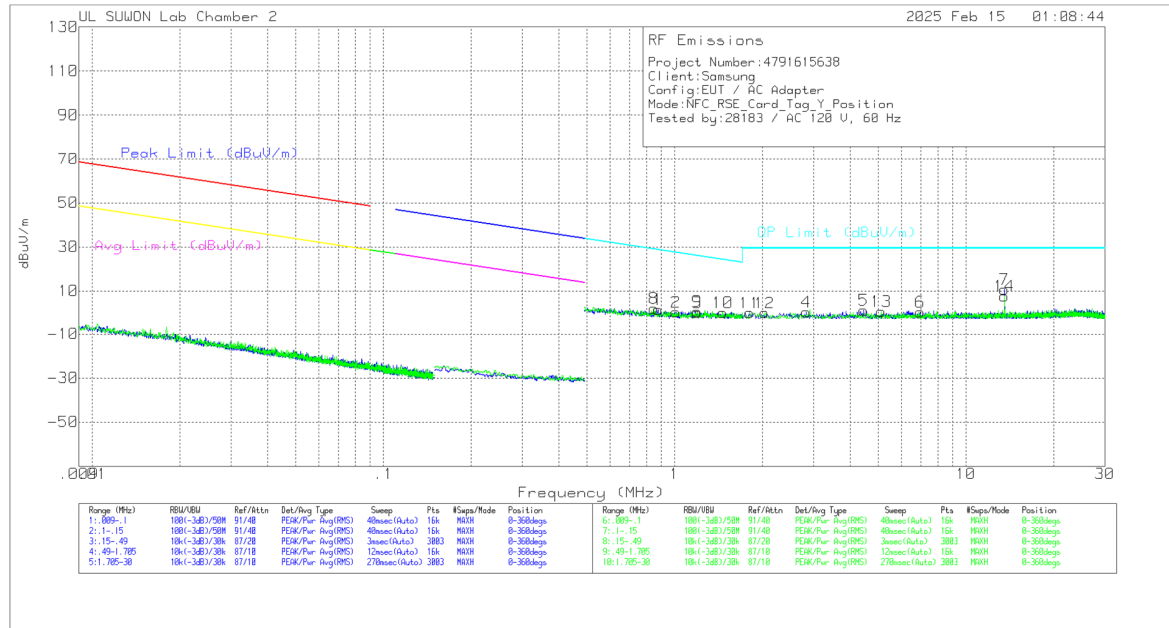

Trace Markers

[Face on]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Antenna Correction Factor(dB/m)	Cable Loss [dB]	Dist Corr 30m[dB]	Corrected Reading (dBuV/m)	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
1	.87749	21.6	Pk	19.9	.2	-40	1.7	28.75	-27.05	0-360
2	1.00988	20.31	Pk	19.9	.2	-40	.41	27.54	-27.13	0-360
3	1.19513	20.15	Pk	19.9	.2	-40	.25	26.08	-25.83	0-360
4	2.82658	20.17	Pk	20.1	.3	-40	.57	29.5	-28.93	0-360
5	4.45239	20.99	Pk	20.1	.3	-40	1.39	29.5	-28.11	0-360
6	6.95473	19.94	Pk	20.1	.4	-40	.44	29.5	-29.06	0-360
**7	13.56165	30.28	Pk	20	.5	-40	10.78	29.5	-18.72	0-360

[Face off]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Antenna Correction Factor(dB/m)	Cable Loss [dB]	Dist Corr 30m[dB]	Corrected Reading (dBuV/m)	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
8	.84747	22.04	Pk	19.9	.2	-40	2.14	29.05	-26.91	0-360
9	1.19646	20.68	Pk	19.9	.2	-40	.78	26.07	-25.29	0-360
10	1.46022	20.25	Pk	19.9	.2	-40	.35	24.34	-23.99	0-360
11	1.80868	19.93	Pk	20	.2	-40	.13	29.5	-29.37	0-360
12	2.03488	19.91	Pk	20	.2	-40	.11	29.5	-29.39	0-360
13	5.11685	20.42	Pk	20.1	.3	-40	.82	29.5	-28.68	0-360
**14	13.56165	27.25	Pk	20	.5	-40	7.75	29.5	-21.75	0-360

Pk - Peak detector

**Fundamental

Note 1: The data for marker number 7 and 14 are the fundamental signal.


Please refer to section 8.1.1 about the fundamental level.

Frequency range 0.009MHz ~ 0.490MHz, only noise floor level and more than 20dB margin.


Note 2: Radiated test were investigated with three receiving antenna axes: Face-on, Face-off and horizontal (parallel to the ground plane) and the worse orientations of Face-on and Face-off were set for final test.

8.1.3. TX SPURIOUS EMISSION 30 TO 1000 MHz [EUT with passive TAG mode]

HORIZONTAL

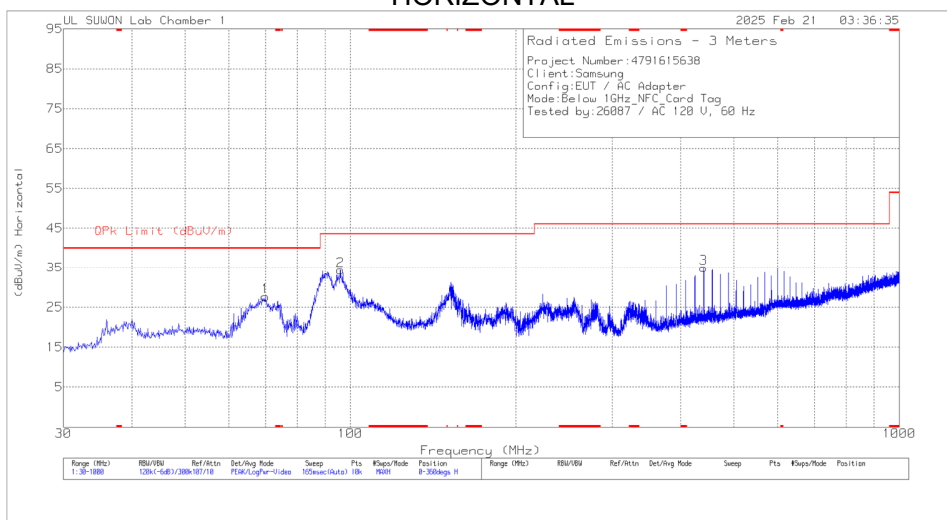

VERTICAL

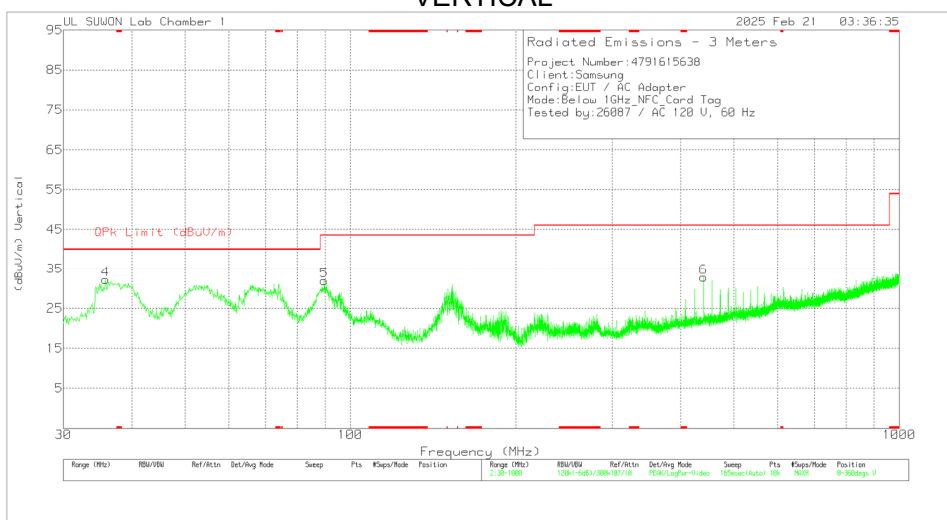


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Antenna_750_Fact or(dB/m)	Below_1G_Path Loss(dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	69.964	42.66	Pk	15.5	-30.6	27.56	40	-12.44	0-360	100	H
2	95.863	47.8	Pk	16.7	-30.2	34.3	43.52	-9.22	0-360	200	H
3	440.31	40.83	Pk	21.9	-27.8	34.93	46.02	-11.09	0-360	100	H
4	35.82	46.44	Pk	16.9	-31.1	32.24	40	-7.76	0-360	200	V
5	89.558	46.62	Pk	15.6	-30.3	31.92	43.52	-11.6	0-360	200	V
6	440.019	38.75	Pk	21.9	-27.8	32.85	46.02	-13.17	0-360	200	V

* - indicates frequency in 47 CFR Pt 15 / IC RSS-Restricted Band
Pk - Peak detector

8.1.4. FUNDAMENTAL AND SPURIOUS EMISSIONS) [EUT without passive TAG mode]

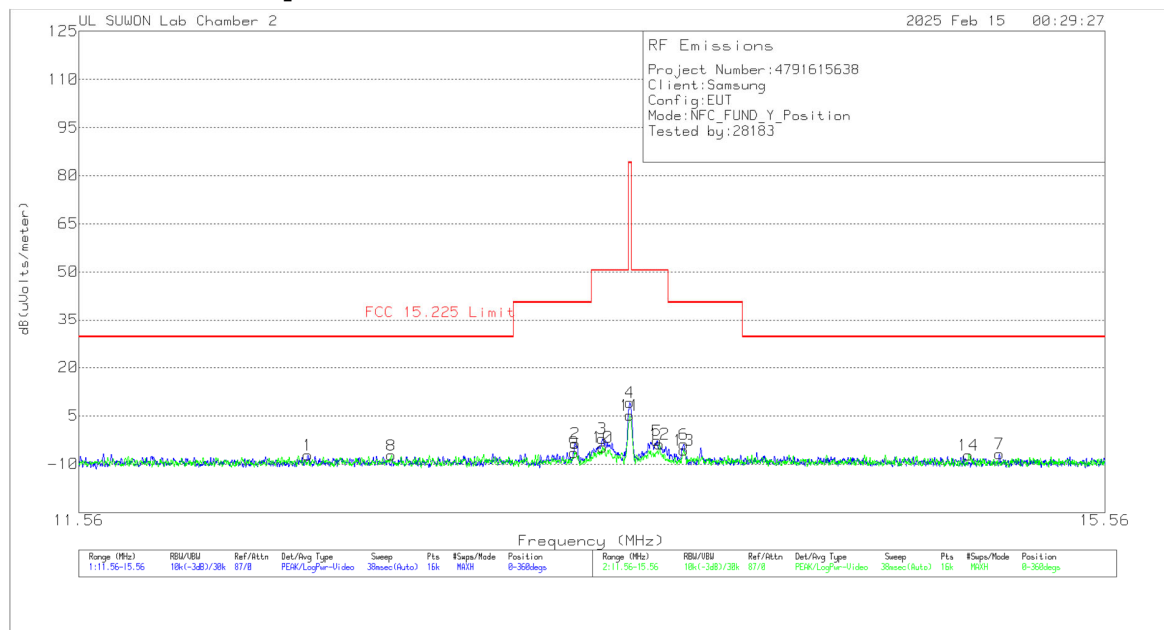

Trace Markers Face on

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Antenna Correction Factor(dB/m)	Dist Corr 30m[dB]	Cable Loss[dB]	Corrected Reading (dBuV/m)	FCC 15.225 Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
1	12.35263	12.15	Pk	20.2	-40	.5	-7.15	29.54	-36.69	0-360
2	13.34663	15.81	Pk	20.1	-40	.5	-3.59	40.51	-44.1	0-360
3	13.45188	17.33	Pk	20.1	-40	.5	-2.07	50.5	-52.57	0-360
**4	13.56	28.53	Pk	20.1	-40	.5	9.13	84	-74.87	0-360
5	13.668	16.58	Pk	20.1	-40	.6	-2.72	50.5	-53.22	0-360
6	13.77288	15.45	Pk	20.1	-40	.6	-3.85	40.51	-44.36	0-360
7	15.09188	12.54	Pk	20.1	-40	.6	-6.76	29.54	-36.3	0-360

Face off

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Antenna Correction Factor(dB/m)	Dist Corr 30m[dB]	Cable Loss[dB]	Corrected Reading (dBuV/m)	FCC 15.225 Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
8	12.65513	12.12	Pk	20.1	-40	.5	-7.28	29.54	-36.82	0-360
9	13.34388	12.97	Pk	20.1	-40	.5	-6.43	40.51	-46.94	0-360
10	13.45338	14.65	Pk	20.1	-40	.5	-4.75	50.5	-55.25	0-360
**11	13.56	24.53	Pk	20.1	-40	.5	5.13	84	-78.87	0-360
12	13.67638	15.54	Pk	20.1	-40	.6	-3.76	50.5	-54.26	0-360
13	13.77313	13.61	Pk	20.1	-40	.6	-5.69	40.51	-46.2	0-360
14	14.95775	12.16	Pk	20.1	-40	.6	-7.14	29.54	-36.68	0-360

Pk - Peak detector


**Fundamental

Note 1: Although these tests were performed other than open filed test site, adequate comparison measurements were confirmed against 30 m open are test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Note 2: Radiated test were investigated with three receiving antenna axes: Face-on, Face-off and horizontal (parallel to the ground plane) and the worse orientations of Face-on and Face-off were set for final test.

8.1.5. SPURIOUS EMISSION 0.09 TO 30 MHz [EUT without passive TAG mode]

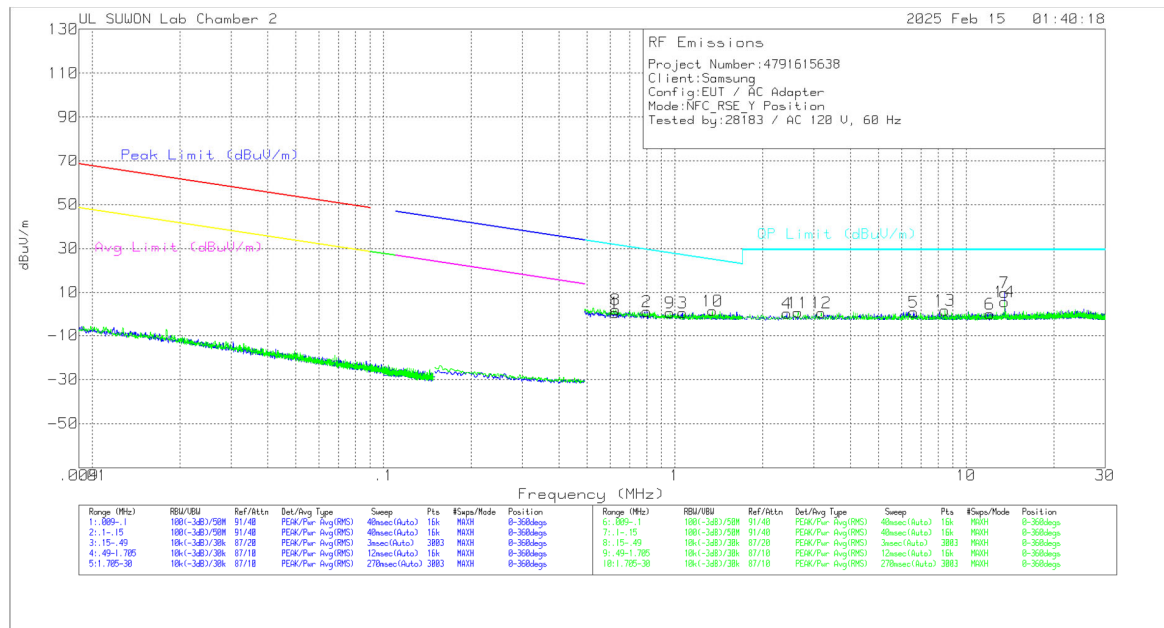

Trace Markers

[Face on]

Marker	Frequency (MHz)	Meter Reading (dBUV)	Det	Antenna Correction Factor(dB/m)	Cable Loss [dB]	Dist Corr 30m[dB]	Corrected Reading (dBUV/m)	QP Limit (dBUV/m)	Margin (dB)	Azimuth (Degs)
1	.62304	20.91	Pk	19.9	.1	-40	.91	31.72	-30.81	0-360
2	.80217	21.31	Pk	19.9	.2	-40	1.41	29.53	-28.12	0-360
3	1.06308	20.72	Pk	19.9	.2	-40	.82	27.09	-26.27	0-360
4	2.4213	20.34	Pk	20	.2	-40	.54	29.5	-28.96	0-360
5	6.606	20.67	Pk	20.1	.4	-40	1.17	29.5	-28.33	0-360
6	12.09135	19.66	Pk	20	.5	-40	.16	29.5	-29.34	0-360
**7	13.56165	29.49	Pk	20	.5	-40	9.99	29.5	-19.51	0-360

[Face off]

Marker	Frequency (MHz)	Meter Reading (dBUV)	Det	Antenna Correction Factor(dB/m)	Cable Loss [dB]	Dist Corr 30m[dB]	Corrected Reading (dBUV/m)	QP Limit (dBUV/m)	Margin (dB)	Azimuth (Degs)
8	.62661	22.24	Pk	19.9	.1	-40	2.24	31.67	-29.43	0-360
9	.96268	20.59	Pk	19.9	.2	-40	.69	27.95	-27.26	0-360
10	1.348	21.66	Pk	19.9	.2	-40	1.76	25.03	-23.27	0-360
11	2.6475	20.53	Pk	20.1	.3	-40	.93	29.5	-28.57	0-360
12	3.18473	20.43	Pk	20.1	.3	-40	.83	29.5	-28.67	0-360
13	8.4533	21.59	Pk	20	.4	-40	1.99	29.5	-27.51	0-360
**14	13.56165	25.24	Pk	20	.5	-40	5.74	29.5	-23.76	0-360

Pk - Peak detector


**Fundamental

Note 1: The data for marker number 7 and 14 are the fundamental signal. Please refer to section 8.1.4 about the fundamental level. Frequency range 0.009MHz ~ 0.490MHz, only noise floor level and more than 20dB margin.


Note 2: Radiated test were investigated with three receiving antenna axes: Face-on, Face-off and horizontal (parallel to the ground plane) and the worse orientations of Face-on and Face-off were set for final test.

8.1.6. TX SPURIOUS EMISSION 30 TO 1000 MHz [EUT without passive TAG mode]

HORIZONTAL

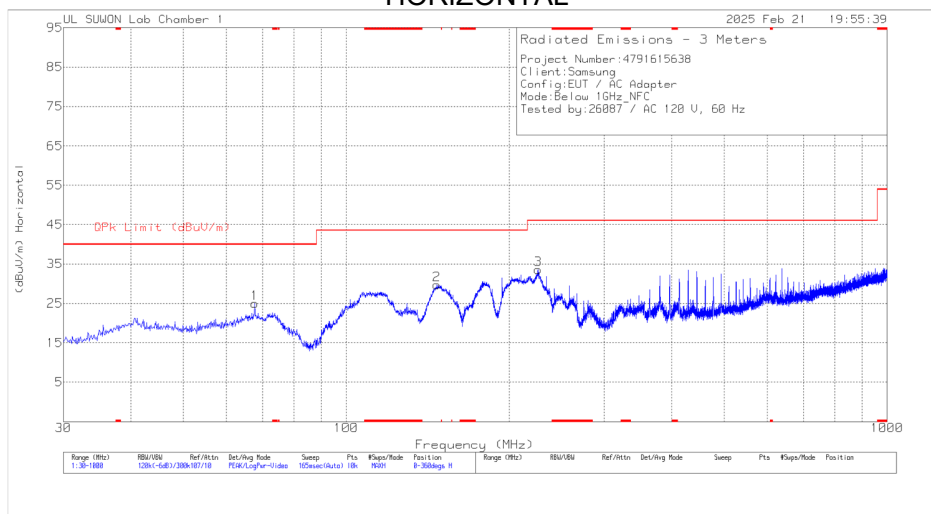

VERTICAL

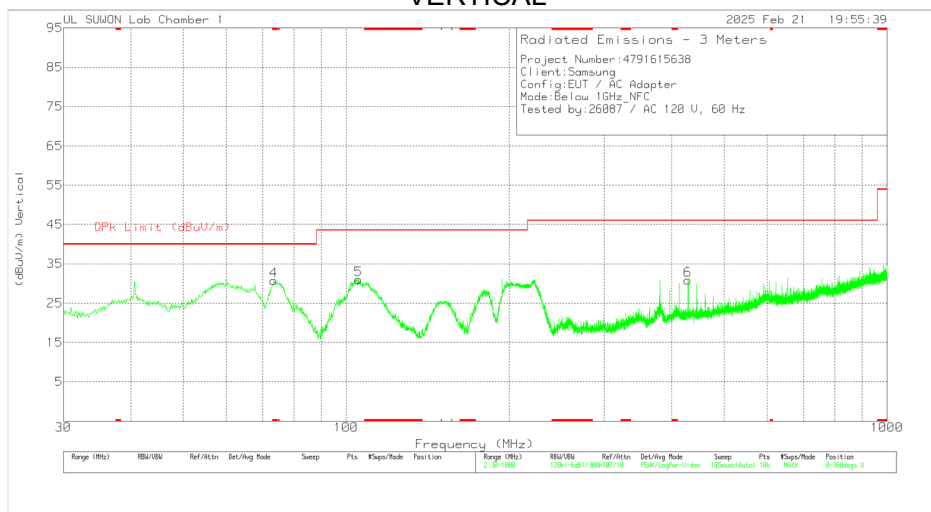

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Antenna 750 Fact or (dB/m)	Below 1G Path Loss (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	67.733	39.33	Pk	16.3	-30.6	25.03	40	-14.97	0-360	200	H
2	147.176	45.8	Pk	13.7	-29.8	29.7	43.52	-13.82	0-360	100	H
3	226.425	45.34	Pk	17.4	-29.1	33.64	46.02	-12.38	0-360	100	H
4	* 73.456	47.03	Pk	14.1	-30.4	30.73	40	-9.27	0-360	200	V
5	105.272	43.6	Pk	17.6	-30.2	31	43.52	-12.52	0-360	200	V
6	428.573	36.83	Pk	21.8	-27.8	30.83	46.02	-15.19	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

9. AC MAINS LINE CONDUCTED EMISSIONS

LIMITS

§15.207

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Notes:
1. The lower limit shall apply at the transition frequencies
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.


Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

No non-compliance noted:

WORST EMISSIONS(non-Terminated)

LINE 1 PLOT

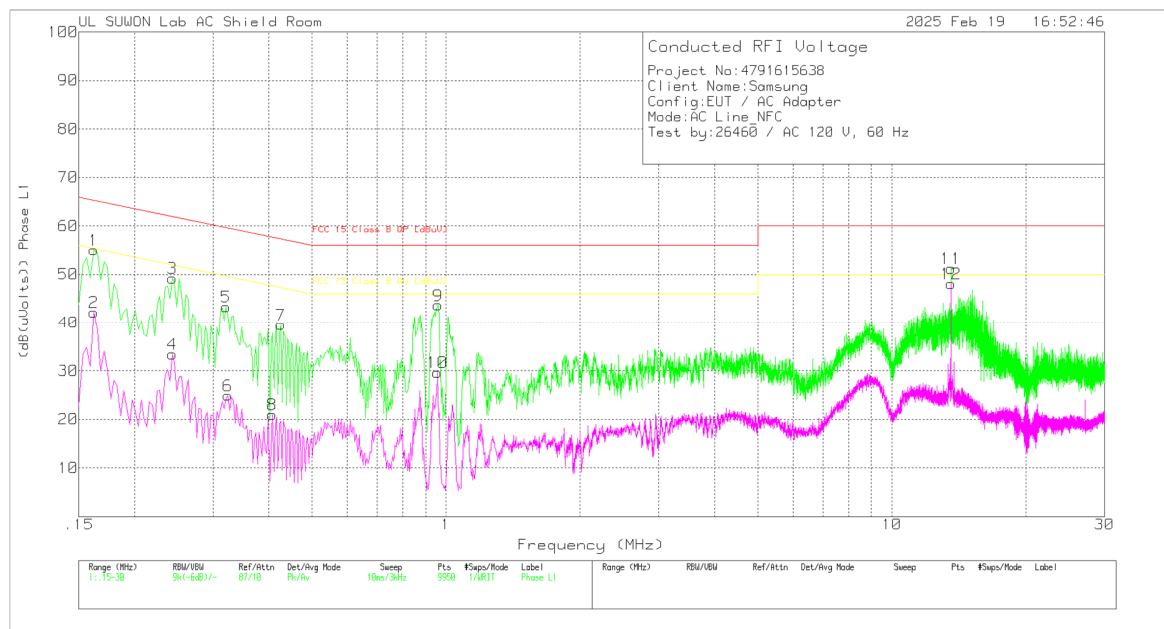

LINE 1 RESULTS

Trace Markers

Range 1: Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_Wit h EX_L1 [dB]	Cable Loss [dB]	Corrected Reading (dB(uVolts))	FCC 15 Class B QP [dBuV]	Margin (dB)	FCC 15 Class B AV [dBuV]	Margin (dB)
1	.162	45.08	Pk	9.9	.1	55.08	65.36	-10.28	-	-
2	.162	32.23	Av	9.9	.1	42.23	-	-	55.36	-13.13
3	.243	39.4	Pk	9.7	.1	49.2	61.99	-12.79	-	-
4	.243	23.66	Av	9.7	.1	33.46	-	-	51.99	-18.53
5	.321	33.54	Pk	9.7	.1	43.34	59.68	-16.34	-	-
6	.324	15.12	Av	9.7	.1	24.92	-	-	49.6	-24.68
7	.426	29.68	Pk	9.8	.1	39.58	57.33	-17.75	-	-
8	.408	11.11	Av	9.8	.1	21.01	-	-	47.69	-26.68
9	.96	33.75	Pk	9.8	.1	43.65	56	-12.35	-	-
10	.957	19.7	Av	9.8	.1	29.6	-	-	46	-16.4
11	13.56	40.94	Pk	10	.3	51.24	60	-8.76	-	-
12	13.56	37.77	Av	10	.3	48.07	-	-	50	-1.93

Pk - Peak detector

Av - Average detection


Quasi-Peak Emissions

Range 1: Phase L1 .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101836_Wit h EX_L1 [dB]	Cable Loss [dB]	Corrected Reading (dB(uVolts))	FCC 15 Class B QP [dBuV]	Margin (dB)	FCC 15 Class B AV [dBuV]	Margin (dB)
13.5602	38.79	Qp	10	.3	49.09	60	-10.91	-	-

Qp - Quasi-Peak detector

LINE 2 PLOT

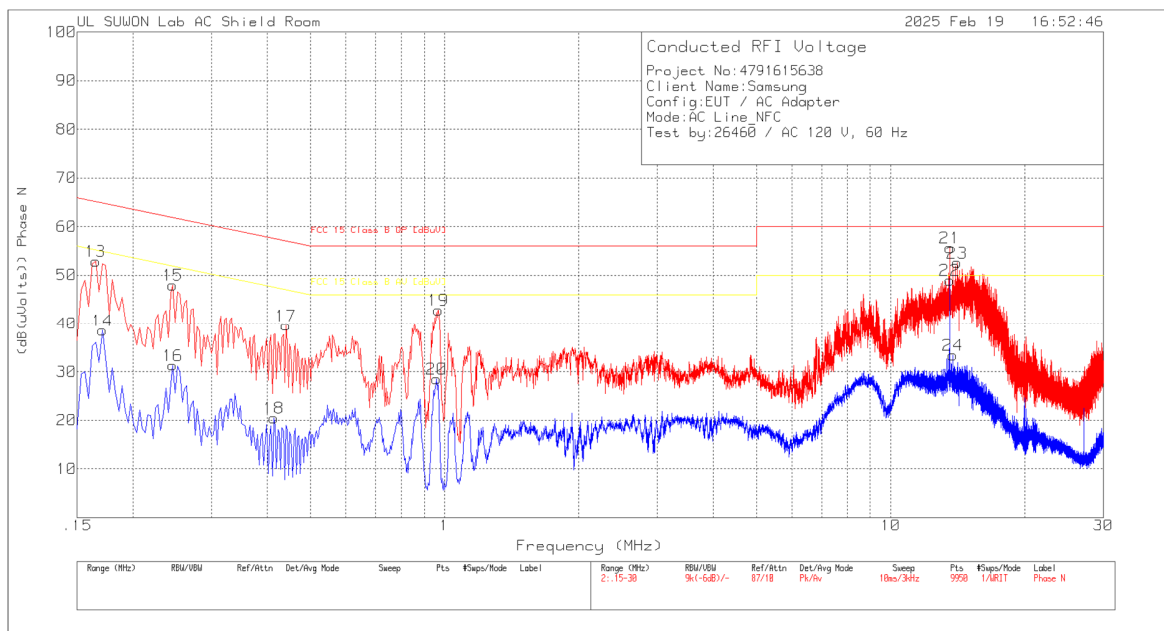

LINE 2 RESULTS

Trace Markers

Range 2: Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_N [dB]	Cable Loss [dB]	Corrected Reading [dBuV]	FCC 15 Class B QP [dBuV]	Margin (dB)	FCC 15 Class B AV [dBuV]	Margin (dB)
13	.165	42.9	Pk	9.9	.1	52.9	65.21	-12.31	-	-
14	.171	28.46	Av	10	.1	38.56	-	-	54.91	-16.35
15	.246	38.25	Pk	9.6	.1	47.95	61.89	-13.94	-	-
16	.246	21.63	Av	9.6	.1	31.33	-	-	51.89	-20.56
17	.441	29.72	Pk	9.8	.1	39.62	57.04	-17.42	-	-
18	.414	10.61	Av	9.8	.1	20.51	-	-	47.57	-27.06
19	.969	32.95	Pk	9.8	.1	42.85	56	-13.15	-	-
20	.96	18.57	Av	9.8	.1	28.47	-	-	46	-17.53
21	13.56	45.35	Pk	10	.3	55.65	60	-4.35	-	-
22	13.56	38.73	Av	10	.3	49.03	-	-	50	-.97
23	14.106	42.27	Pk	10	.3	52.57	60	-7.43	-	-
24	13.77	23.1	Av	10	.3	33.4	-	-	50	-16.6

Pk - Peak detector

Av - Average detection

Quasi-Peak Emissions


Range 2: Phase N .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101836_Wit h EX_N [dB]	Cable Loss [dB]	Corrected Reading (dB(uVolts))	FCC 15 Class B QP [dBuV]	Margin (dB)	FCC 15 Class B AV [dBuV]	Margin (dB)
13.5602	42.58	Qp	10	.3	52.88	60	-7.12	-	-
14.1068	32.31	Qp	10	.3	42.61	60	-17.39	-	-

Qp - Quasi-Peak detector

WORST EMISSIONS(Terminated)

LINE 1 PLOT

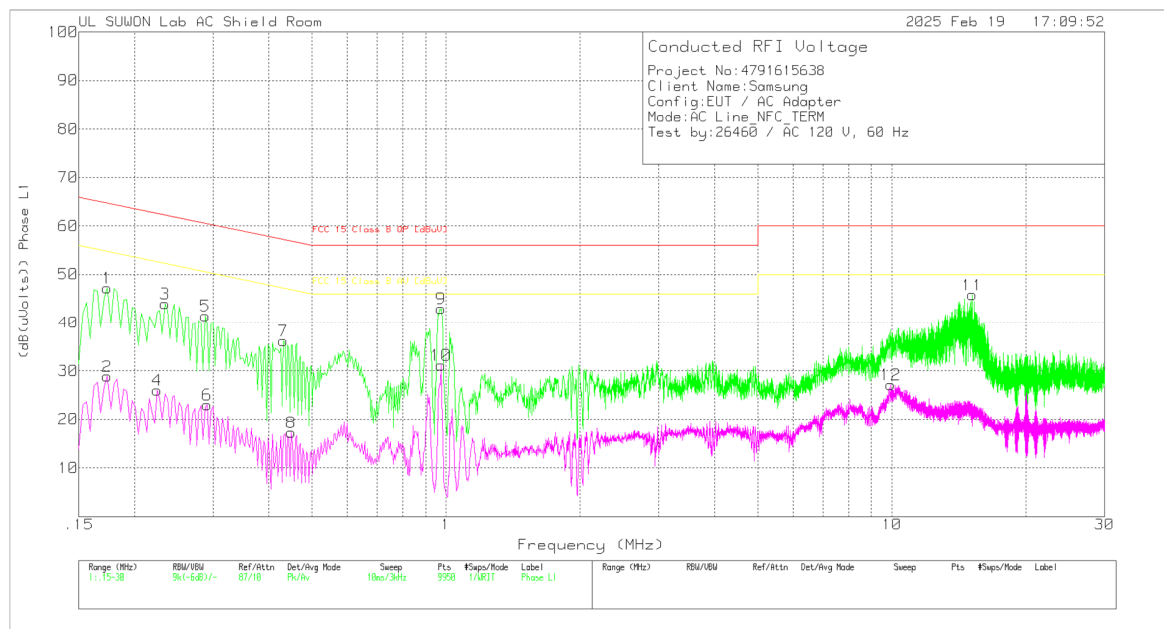

LINE 1 RESULTS

Trace Markers


Range 1: Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_L1 [dB]	Cable Loss [dB]	Corrected Reading [dBuV]	FCC 15 Class B QP [dBuV]	Margin (dB)	FCC 15 Class B AV [dBuV]	Margin (dB)
1	.174	37.15	Pk	10	.1	47.25	64.77	-17.52	-	-
2	.174	18.73	Av	10	.1	28.83	-	-	54.77	-25.94
3	.234	34.18	Pk	9.7	.1	43.98	62.31	-18.33	-	-
4	.225	16.22	Av	9.7	.1	26.02	-	-	52.63	-26.61
5	.288	31.67	Pk	9.7	.1	41.47	60.58	-19.11	-	-
6	.291	13.23	Av	9.7	.1	23.03	-	-	50.5	-27.47
7	.432	26.28	Pk	9.8	.1	36.18	57.21	-21.03	-	-
8	.45	7.37	Av	9.8	.1	17.27	-	-	46.88	-29.61
9	.975	33.08	Pk	9.8	.1	42.98	56	-13.02	-	-
10	.975	21.3	Av	9.8	.1	31.2	-	-	46	-14.8
11	15.153	35.49	Pk	10	.3	45.79	60	-14.21	-	-
12	9.948	16.99	Av	9.9	.2	27.09	-	-	50	-22.91

Pk - Peak detector

Av - Average detection

LINE 2 PLOT

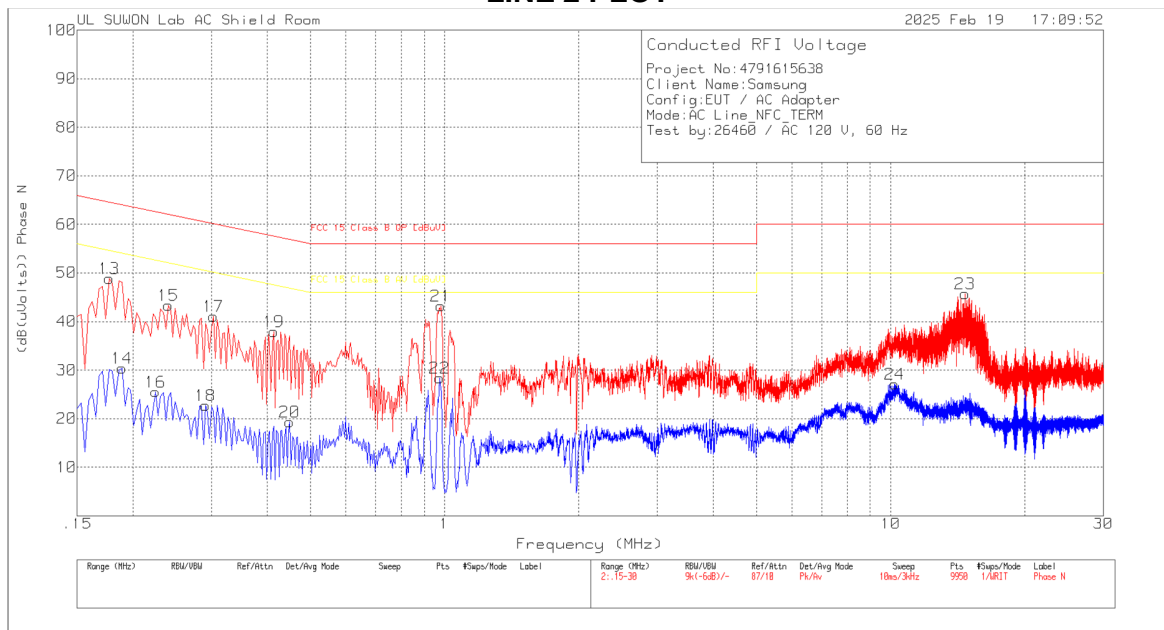

LINE 2 RESULTS

Trace Markers

Range 2: Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_N [dB]	Cable Loss [dB]	Corrected Reading [dBuV]	FCC 15 Class B QP [dBuV]	Margin (dB)	FCC 15 Class B AV [dBuV]	Margin (dB)
13	.177	38.74	Pk	10	.1	48.84	64.63	-15.79	-	-
14	.189	20.38	Av	9.9	.1	30.38	-	-	54.08	-23.7
15	.24	33.56	Pk	9.7	.1	43.36	62.1	-18.74	-	-
16	.225	15.75	Av	9.7	.1	25.55	-	-	52.63	-27.08
17	.303	31.26	Pk	9.7	.1	41.06	60.16	-19.1	-	-
18	.291	12.93	Av	9.7	.1	22.73	-	-	50.5	-27.77
19	.414	28	Pk	9.8	.1	37.9	57.57	-19.67	-	-
20	.45	9.43	Av	9.8	.1	19.33	-	-	46.88	-27.55
21	.981	33.29	Pk	9.8	.1	43.19	56	-12.81	-	-
22	.975	18.53	Av	9.8	.1	28.43	-	-	46	-17.57
23	14.67	35.32	Pk	10.1	.3	45.72	60	-14.28	-	-
24	10.209	17.05	Av	9.9	.2	27.15	-	-	50	-22.85

Pk - Peak detector

Av - Average detection

10. FREQUENCY STABILITY

LIMIT

§15.225 (e) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency, over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

TEST PROCEDURE

ANSI C63.10 §6.8

RESULTS

Test Date	2025-02-20
Test Engineer	25910

Reference Frequency: EUT Channel 13.56 MHz @ 20°C Limit: ± 100 ppm = 1.356 kHz										
Power Supply (Vdc)	Envir. Temp (°C)	Frequency Deviation Measured with Time Elapse								
		Start up (MHz)	Delta (ppm)	@ 2mins (MHz)	Delta (ppm)	@ 5mins (MHz)	Delta (ppm)	@ 10 mins (MHz)	Delta (ppm)	Limit (ppm)
3.88	50	13.559965544	-4.805	13.559962516	-5.029	13.559960765	-5.158	13.559960227	-5.197	100
3.88	40	13.559990896	-2.936	13.559989023	-3.074	13.559979749	-3.758	13.559975602	-4.064	100
3.88	30	13.560010773	-1.470	13.560006182	-1.808	13.559999246	-2.320	13.559995577	-2.590	100
3.88	20	13.560030704	0.000	13.560028183	-0.186	13.560027309	-0.250	13.560026389	-0.318	100
3.88	10	13.560018124	-0.928	13.560027396	-0.244	13.560034520	0.281	13.560038170	0.551	100
3.88	0	13.560058080	2.019	13.560059327	2.111	13.560060784	2.218	13.560061697	2.286	100
3.88	-10	13.560064697	2.507	13.560064742	2.510	13.560064817	2.516	13.560064865	2.519	100
3.88	-20	13.560045828	1.115	13.560045878	1.119	13.560045352	1.080	13.560044638	1.028	100
3.88	-30	13.559980096	-3.732	13.559986608	-3.252	13.559991050	-2.924	13.559992155	-2.843	100

Reference Frequency: EUT Channel 13.56 MHz @ 20°C Limit: ± 100 ppm = 1.356 kHz										
Power Supply (Vdc)	Envir. Temp (°C)	Frequency Deviation Measured with Time Elapse								
		Start up (MHz)	Delta (ppm)	@ 2mins (MHz)	Delta (ppm)	@ 5mins (MHz)	Delta (ppm)	@ 10 mins (MHz)	Delta (ppm)	Limit (ppm)
3.70	20	13.560031738	0.076	13.560028384	-0.171	13.560028582	-0.233	13.560027322	-0.326	100
3.88	20	13.560030704	0.000	13.560028183	-0.186	13.560027309	-0.250	13.560026389	-0.394	100
4.45	20	13.560029880	-0.061	13.560027935	-0.204	13.560026746	-0.368	13.560025708	-0.445	100

No non-compliance noted.

END OF TEST REPORT