




Element Washington DC LLC

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. +1.410.290.6652 / Fax +1.410.290.6654

<https://www.element.com>



WPT RF EXPOSURE EVALUATION TEST REPORT

Applicant Name:

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

10/14/2024 – 11/1/2024

Test Site/Location:

Element Washington DC LLC,
Columbia, MD, USA

Test Report Serial No.:

1M2408260070-05.A3L

Date of Issue:

12/6/2024

FCC ID:

A3LSMS938JPN

APPLICANT:

SAMSUNG ELECTRONICS CO., LTD.

Apparatus/Device:	Portable Handset
Application Type:	Certification
Model:	SC-52F
Additional Model(s):	SCG32
Device Serial No.:	Pre-production Sample [SN: 1442M]
FCC Specification(s):	FCC 47 CFR Part 2.1093 KDB 680106 D01 v03r01

Mode	Thermal
	Basic Restriction
	Peak Spatial SAR (W/kg)
WPT	<0.01
Digitizer	<0.01
FCC Limit	1.6
Tested Distance	0mm
VERDICT	Pass

The device bearing the identifier specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and has been tested in accordance with the measurement procedures specified in FCC 47 CFR Part 2.1093 and KDB 680106 D01 v03r01. These measurements were performed with no deviation from the standards. Test results reported herein relate only to the item(s) tested.

I authorize and attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


RJ Ortanez
Executive Vice President



FCC ID: A3LSMS938JPN		WPT RF EXPOSURE EVALUATION REPORT	Reviewed by: Technical Manager
Test Report S/N: 1M2408260070-05.A3L	Test Dates: 10/14/2024 – 11/1/2024	Apparatus/Device: Portable Handset	Page 1 of 21

TABLE OF CONTENTS

1	DEVICE UNDER TEST	3
2	MEASUREMENT SYSTEM.....	5
3	MEASUREMENT PROCEDURE.....	6
4	RF EXPOSURE LIMITS	7
5	SYSTEM CHECK	8
6	DATA SUMMARY	10
7	INFORMATIVE MEASUREMENT UNCERTAINTY	13
8	CONCLUSION.....	20
9	REFERENCES	21

APPENDIX A: RF EXPOSURE TEST PLOTS

APPENDIX B: TEST SETUP PHOTOGRAPHS

APPENDIX C: CALIBRATION CERTIFICATE

FCC ID: A3LSMS938JPN		WPT RF EXPOSURE EVALUATION REPORT	Reviewed by: Technical Manager
Test Report S/N: 1M2408260070-05.A3L	Test Dates: 10/14/2024 – 11/1/2024	Apparatus/Device: Portable Handset	Page 2 of 21

1 DEVICE UNDER TEST

1.1 Device Overview

Table 1-1
Operation Summary

Mode	Operating Mode	Tx Frequency
WPT	Device to Device (Inline)	110-145kHz
	Device to Device (Offset)	
	Device to Watch	
	Device to Earbuds	
	Ping Signal	
Digitizer	Button Push, Hover, Eraser (*)	500-600kHz

*Digitizer is evaluated while EUT was placed in the eraser condition (worst case) using a factory test mode to ensure continuous operation.

1.2 WPT System Specifications

Table 1-2
WPT System Specifications

Item	Description
Operating Frequency	110-145kHz
Max Tx Power	9W
Modulation/Protocol	FSK/ASK
Tx Coil Diameter	12.5mm (Inner) / 42mm (Outer)

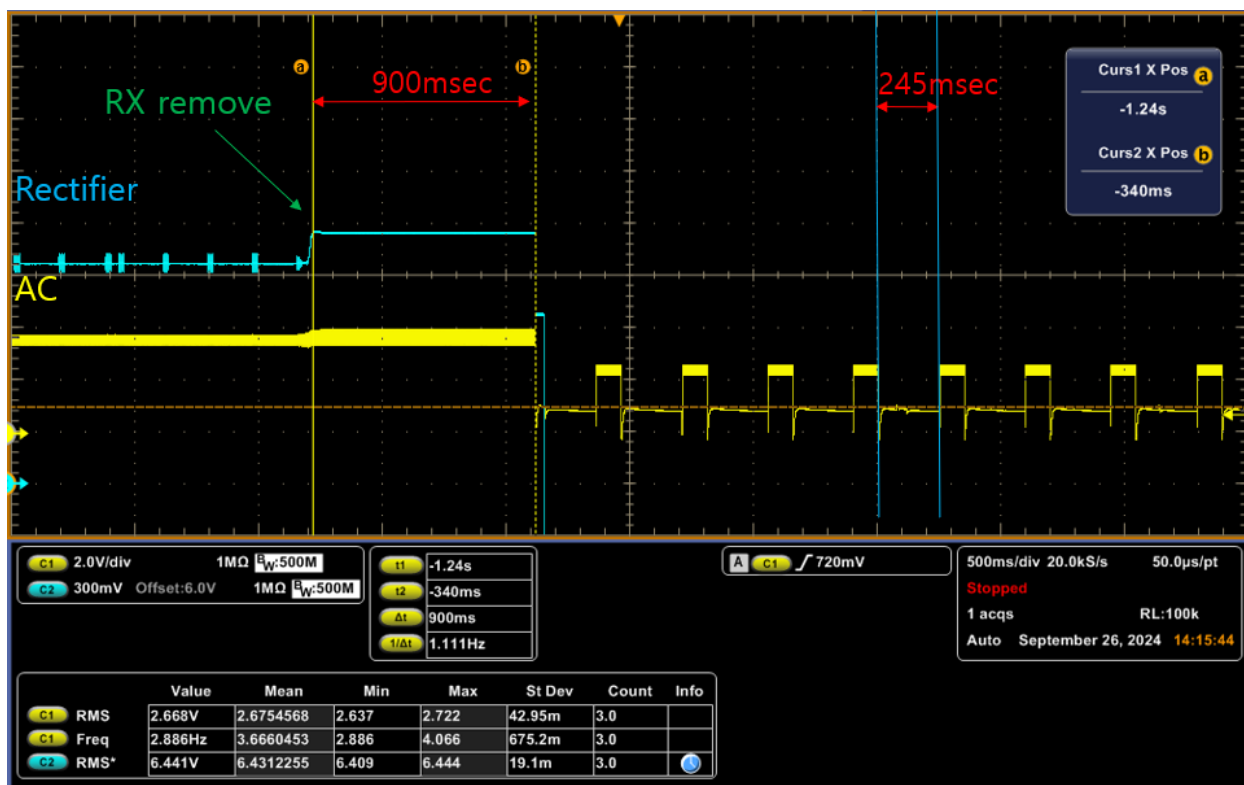


Figure 1-1 WPT Load Removal Power Down

FCC ID: A3LSMS938JPN	element	WPT RF EXPOSURE EVALUATION REPORT	Reviewed by: Technical Manager
Test Report S/N: 1M2408260070-05.A3L	Test Dates: 10/14/2024 – 11/1/2024	Apparatus/Device: Portable Handset	Page 3 of 21

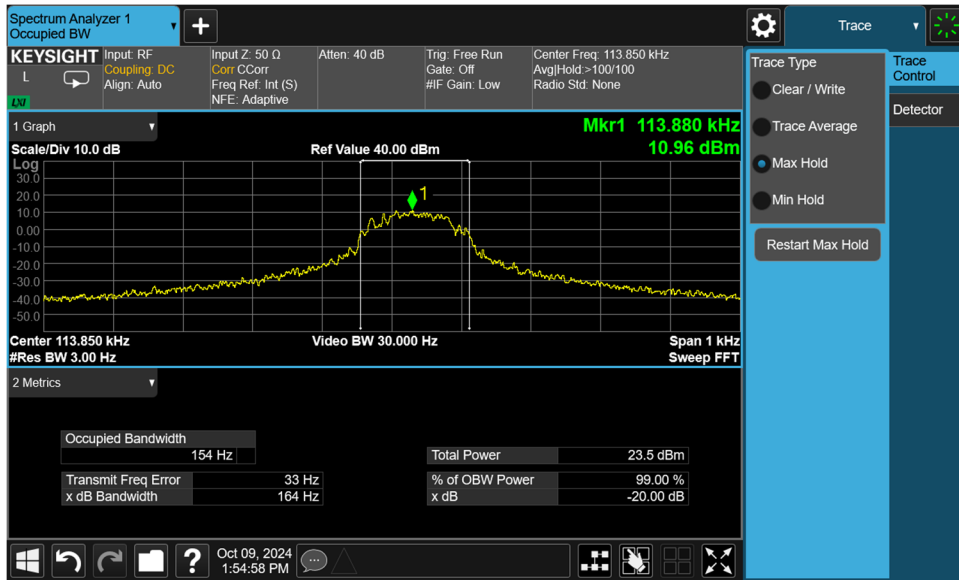


Figure 1-2 WPT Occupied Bandwidth

1.3 Digitizer System Specifications

Table 1-3
Digitizer System Specifications

Item	Description
Operating Frequency	531kHz: Button Push 562kHz: Hover 593kHz: Eraser
Max Tx Power	25mW
Modulation/Protocol	None
Tx Coils	X Axis Coil Y Axis Coil

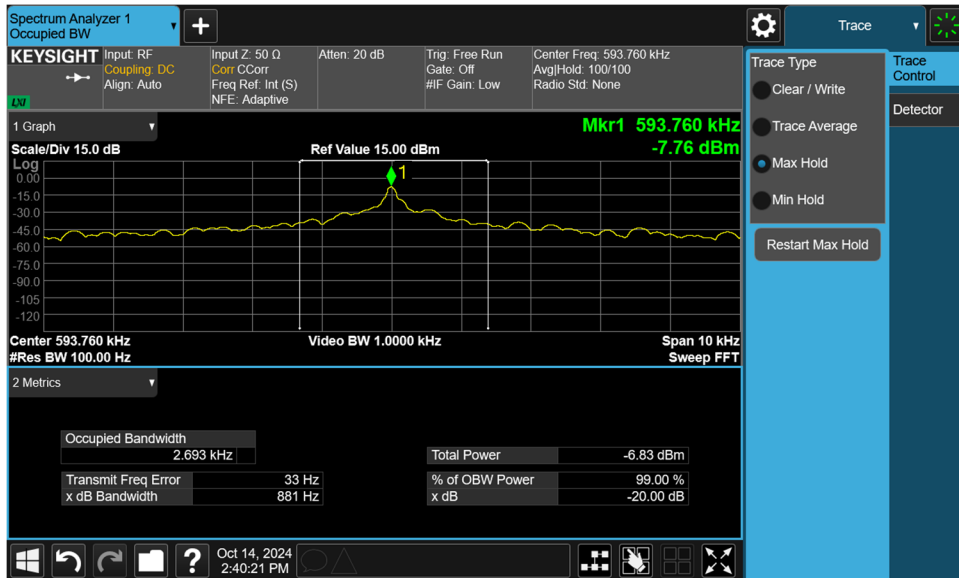


Figure 1-3 Digitizer Occupied Bandwidth

FCC ID: A3LSMS938JPN		WPT RF EXPOSURE EVALUATION REPORT	Reviewed by: Technical Manager
Test Report S/N: 1M2408260070-05.A3L	Test Dates: 10/14/2024 – 11/1/2024	Apparatus/Device: Portable Handset	Page 4 of 21

2 MEASUREMENT SYSTEM

2.1 Measurement Probe

Model:	Speag MAGPy-8H3D+E3 V2
S/N:	3060/2051
Frequency:	3 kHz – 10 MHz
Sensitivity:	H-Field: 0.1 A/m, E-Field: 0.08 V/m
Amplitude Flatness:	<0.2 dB (typ)
Linearity:	H-Field: <0.2 dB (typ.), E-Field: <0.5 dB (typ.) @ 1MHz
Linear range:	H-Field: 0.1 to 3200 A/m, E-Field: 0.1 to 2000 V/m
Sensor Size:	H-Field: 10mm, E-Field: 50mm
Isotropy:	<0.5 (typ.)
Dimensions:	110mm x 635mm x 35mm



Figure 2-1
MAGPy-8H3D+E3 V2 Measurement Probe

FCC ID: A3LSMS938JPN		WPT RF EXPOSURE EVALUATION REPORT	Reviewed by: Technical Manager
Test Report S/N: 1M2408260070-05.A3L	Test Dates: 10/14/2024 – 11/1/2024	Apparatus/Device: Portable Handset	Page 5 of 21

3 MEASUREMENT PROCEDURE

3.1 Measurement Procedure

Direct measurement (per FCC 47 CFR Part 2.1093 and KDB 680106 D01 v03r01) is employed in this report.

The measurement distance (spacing) is the manufacturer's declared separation distance obtained via information in the user manual. This shall be measured as the distance from the edge of the device to the edge of the measurement probe.

3.2 Test Distance

The DUT is evaluated as a portable device that is expected to be used in close proximity to the user's hands and body. The logical separation distance of the DUT to the user's hands and body is 0 mm. All measurements were conducted with a 0mm separation distance between the probe tip and DUT.

3.3 Measurement Personnel

All measurements in this report were performed by the following personnel:

Test Engineer: Justin DeVos

FCC ID: A3LSMS938JPN	 WPT RF EXPOSURE EVALUATION REPORT	Reviewed by: Technical Manager
Test Report S/N: 1M2408260070-05.A3L	Test Dates: 10/14/2024 – 11/1/2024	Apparatus/Device: Portable Handset
		Page 6 of 21

4 RF EXPOSURE LIMITS

4.1 Limits for Maximum Permissible Exposure

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(i) LIMITS FOR OCCUPATIONAL/CONTROLLED EXPOSURE				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1,500			f/300	<6
1,500-100,000			5	<6
(ii) LIMITS FOR GENERAL POPULATION/UNCONTROLLED EXPOSURE				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1,500			f/1500	<30
1,500-100,000			1.0	<30

f = frequency in MHz. * = Plane-wave equivalent power density.

(1) Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. The phrase fully aware in the context of applying these exposure limits means that an exposed person has received written and/or verbal information fully explaining the potential for RF exposure resulting from his or her employment. With the exception of transient persons, this phrase also means that an exposed person has received appropriate training regarding work practices relating to controlling or mitigating his or her exposure. In situations when an untrained person is transient through a location where occupational/controlled limits apply, he or she must be made aware of the potential for exposure and be supervised by trained personnel pursuant to § 1.1307(b)(2) of this part where use of time averaging is required to ensure compliance with the general population exposure limit. The phrase exercise control means that an exposed person is allowed and also knows how to reduce or avoid exposure by administrative or engineering work practices, such as use of personal protective equipment or time averaging of exposure.

(2) General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure. For example, RF sources intended for consumer use shall be subject to the limits for general population/uncontrolled exposure in this section.

4.2 Limits for Peak Spatial SAR

The SAR limits for general population/uncontrolled exposure are 0.08 W/kg, as averaged over the whole body, and a peak spatial-average SAR of 1.6 W/kg, averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the parts of the human body treated as extremities, such as hands, wrists, feet, ankles, and pinnae, where the peak spatial-average SAR limit is 4 W/kg, averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). Exposure may be averaged over a time period not to exceed 30 minutes to determine compliance with general population/uncontrolled SAR limits.

**An evaluation against the limits for peak spatial SAR shall be performed when the DUT exceeds the limits for maximum permissible exposure.

FCC ID: A3LSMS938JPN		WPT RF EXPOSURE EVALUATION REPORT	Reviewed by: Technical Manager
Test Report S/N: 1M2408260070-05.A3L	Test Dates: 10/14/2024 – 11/1/2024	Apparatus/Device: Portable Handset	Page 7 of 21

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

5 SYSTEM CHECK

Prior to testing, a system check was performed to verify that the test system operates as expected and measures RF exposure accurately. A known E-field/H-field source was used to verify readings of the measurement probe to $\pm 1.24\text{dB}$ of the known fields. A virtual half-space phantom with tissue properties $\epsilon_r = 55$, $\sigma = 0.75\text{S/m}$, $\rho = 1000\text{kg/m}^3$.

5.1 System Check


**Table 5-1
System Check – 85kHz**

Frequency	Distance	Value	Incident H-Field (A/m)	Induced Peak Current Density (A/m ² , RMS)	Induced Peak E-field (V/m)			Peak Spacial SAR (mW/kg)	
					Cube Avg.	Local	Line Avg.	1g Avg.	10g Avg.
85kHz	0	Measurement	201	2.25	3.22	3.25	3.26	5.91	4.35
		Deviation (dB)	0.17	-0.15	-0.11	-0.11	-0.11	-0.40	-0.49
	2	Measurement	184	2.12	3.02	3.25	3.26	5.27	3.93
		Deviation (dB)	0.19	-0.16	-0.14	0.41	0.41	-0.42	-0.51

**Table 5-2
System Check – 400kHz**

Frequency	Distance	Value	Incident H-Field (A/m)	Induced Peak Current Density (A/m ² , RMS)	Induced Peak E-field (V/m)			Peak Spacial SAR (mW/kg)	
					Cube Avg.	Local	Line Avg.	1g Avg.	10g Avg.
400kHz	0	Measurement	272	2.78	4.35	4.45	4.46	7.58	3.71
		Deviation (dB)	0.23	0.32	0.24	0.20	0.24	0.62	0.51
	2	Measurement	239	2.36	3.74	3.84	3.85	5.53	2.76
		Deviation (dB)	0.26	0.26	0.19	0.14	0.18	0.58	0.52

* A virtual half-space phantom with tissue properties $\epsilon_r = 55$, $\sigma = 0.75\text{S/m}$, $\rho = 1000\text{kg/m}^3$ was used to calculate the results in Table 5-1 and Table 5-2.

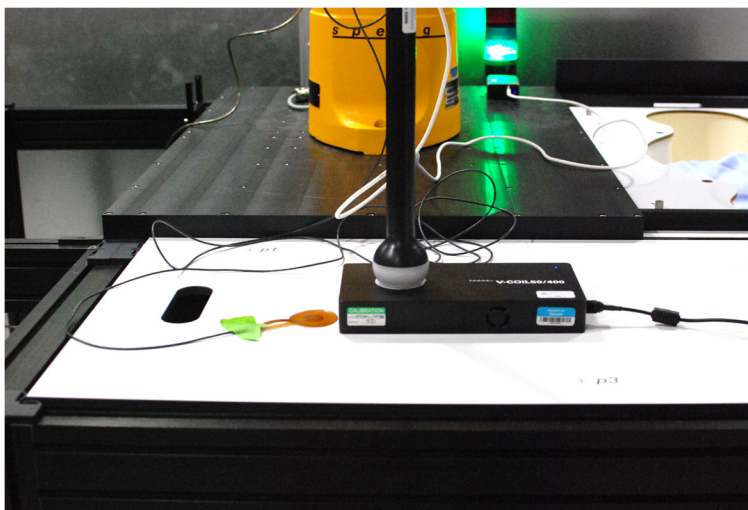

**Figure 6-1
System Check Setup Photo**

FCC ID: A3LSMS938JPN		WPT RF EXPOSURE EVALUATION REPORT		Reviewed by: Technical Manager
Test Report S/N: 1M2408260070-05.A3L	Test Dates: 10/14/2024 – 11/1/2024	Apparatus/Device: Portable Handset		Page 8 of 21

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

5.2 Equipment

**Table 5-3
Equipment List**

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
SPEAG	V-COIL350/85	85kHz MAGPy System Validation Source	3/14/2024	Annual	3/14/2025	1011
SPEAG	V-COIL50/400	400kHz MAGPy System Validation Source	3/14/2024	Annual	3/14/2025	1012
SPEAG	MAGPy-H3D / MAGPy-DAS	Magnetic Amplitude and Gradient Probe and Data Acquisition System	6/28/2024	Annual	6/28/2025	2051

FCC ID: A3LSMS938JPN		WPT RF EXPOSURE EVALUATION REPORT	Reviewed by: Technical Manager
Test Report S/N: 1M2408260070-05.A3L	Test Dates: 10/14/2024 – 11/1/2024	Apparatus/Device: Portable Handset	Page 9 of 21

6 DATA SUMMARY

Frequency (MHz)	Distance (mm)	Incident H-field (A/m)						Limit (A/m)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
0.113	0	1.990	0.263	9.100	9.260	3.340	3.300	1.63
0.113	2	1.730	0.230	7.860	8.010	2.930	2.880	1.63

Table 1. Device to Device (Inline) Incident H-Field

Frequency (MHz)	Distance (mm)	Incident E-field (V/m)						Limit (V/m)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
0.113	0	0.368	15.100	0.370	0.485	27.000	0.664	614
0.113	2	0.340	13.700	0.354	0.449	24.600	0.607	614

Table 2. Device to Device (Inline) Incident E-Field

Frequency (MHz)	Distance (mm)	SAR (mW/kg)						Limit (W/kg)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
0.113	0	0.000142	0.000004	0.000464	0.000471	0.000376	0.000399	1.6
0.113	2	0.000119	0.000004	0.000386	0.000400	0.000344	0.000358	1.6

Table 3. Device to Device (Inline) SAR

Frequency (MHz)	Distance (mm)	Incident H-field (A/m)						Limit (A/m)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
0.113	0	0.971	0.442	0.459	0.403	4.300	5.080	1.63
0.113	2	0.857	0.403	0.416	0.371	3.830	4.450	1.63

Table 4. Device to Device (Offset) Incident H-Field

Frequency (MHz)	Distance (mm)	Incident E-field (V/m)						Limit (V/m)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
0.113	0	1.020	0.512	0.415	0.318	7.170	6.470	614
0.113	2	0.971	0.471	0.391	0.298	6.610	6.080	614

Table 5. Device to Device (Offset) Incident E-Field

Frequency (MHz)	Distance (mm)	SAR (mW/kg)						Limit (W/kg)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
0.113	0	0.000034	0.000017	0.000036	0.000036	0.000439	0.000423	1.6
0.113	2	0.000034	0.000015	0.000033	0.000033	0.000374	0.000371	1.6

Table 6. Device to Device (Offset) SAR

FCC ID: A3LSMS938JPN		WPT RF EXPOSURE EVALUATION REPORT		Reviewed by: Technical Manager
Test Report S/N: 1M2408260070-05.A3L	Test Dates: 10/14/2024 – 11/1/2024	Apparatus/Device: Portable Handset		Page 10 of 21

Frequency (MHz)	Distance (mm)	Incident H-field (A/m)						Limit (A/m)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
0.125	0	2.090	0.771	9.140	5.070	3.290	29.600	1.63
0.125	2	1.840	0.602	8.000	4.490	2.740	26.300	1.63

Table 7. Device to Watch Incident H-Field

Frequency (MHz)	Distance (mm)	Incident E-field (V/m)						Limit (V/m)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
0.125	0	7.520	5.750	7.110	7.390	26.200	66.300	614
0.125	2	7.340	5.260	7.250	7.030	24.200	60.800	614

Table 8. Device to Watch Incident E-Field

Frequency (MHz)	Distance (mm)	SAR (mW/kg)						Limit (W/kg)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
0.125	0	0.000145	0.000074	0.001490	0.000629	0.000305	0.015400	1.6
0.125	2	0.000128	0.000069	0.001230	0.000544	0.000274	0.012500	1.6

Table 9. Device to Watch SAR

Frequency (MHz)	Distance (mm)	Incident H-field (A/m)						Limit (A/m)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
0.113	0	0.335	0.453	6.710	6.450	1.920	21.800	1.63
0.113	2	0.299	0.405	5.710	5.560	1.720	19.700	1.63

Table 10. Device to Earbuds Incident H-Field

Frequency (MHz)	Distance (mm)	Incident E-field (V/m)						Limit (V/m)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
0.113	0	11.400	9.150	12.400	9.740	24.600	40.000	614
0.113	2	10.200	8.290	11.700	9.220	22.500	37.600	614

Table 11. Device to Earbuds Incident E-Field

Frequency (MHz)	Distance (mm)	SAR (mW/kg)						Limit (W/kg)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
0.113	0	0.000012	0.000012	0.000421	0.000403	0.000835	0.005340	1.6
0.113	2	0.000011	0.000011	0.000347	0.000342	0.000730	0.004380	1.6

Table 12. Device to Earbuds SAR

FCC ID: A3LSMS938JPN		WPT RF EXPOSURE EVALUATION REPORT		Reviewed by: Technical Manager
Test Report S/N: 1M2408260070-05.A3L	Test Dates: 10/14/2024 – 11/1/2024	Apparatus/Device: Portable Handset		Page 11 of 21

Frequency (MHz)	Distance (mm)	Incident H-field (A/m)						Limit (A/m)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
0.145	0	2.830	0.647	14.000	5.140	3.860	613.000	1.63
0.145	2	2.500	0.539	11.800	4.250	3.420	525.000	1.63

Table 13. Ping Signal Incident H-Field

Frequency (MHz)	Distance (mm)	Incident E-field (V/m)						Limit (V/m)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
0.145	0	62.300	2.470	4.450	7.890	12.300	49.200	614
0.145	2	54.900	2.270	4.240	8.100	11.200	45.300	614

Table 14. Ping Signal Incident E-Field

Frequency (MHz)	Distance (mm)	SAR (mW/kg)						Limit (W/kg)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
0.145	0	0.000032	0.000026	0.003260	0.000394	0.000348	1.390000	1.6
0.145	2	0.000030	0.000025	0.002590	0.000327	0.000318	0.927000	1.6

Table 15. Ping Signal SAR

Frequency (MHz)	Distance (mm)	Incident H-field (A/m)						Limit (A/m)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
0.593	0	0.017	0.016	0.528	0.404	4.960	0.060	1.63
0.593	2	0.015	0.014	0.447	0.328	4.150	0.052	1.63

Table 16. Digitizer Incident H-Field

Frequency (MHz)	Distance (mm)	Incident E-field (V/m)						Limit (V/m)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
0.593	0	0.037	0.075	0.056	0.061	0.498	0.102	614
0.593	2	0.038	0.071	0.057	0.060	0.464	0.100	614

Table 17. Digitizer Incident E-Field

Frequency (MHz)	Distance (mm)	SAR (mW/kg)						Limit (W/kg)
		EUT Sides						
		Top	Bottom	Left	Right	Front	Back	
0.593	0	0.000000	0.000000	0.000016	0.000012	0.001890	0.000001	1.6
0.593	2	0.000000	0.000000	0.000011	0.000008	0.001390	0.000001	1.6

Table 18. Digitizer SAR

FCC ID: A3LSMS938JPN		WPT RF EXPOSURE EVALUATION REPORT		Reviewed by: Technical Manager
Test Report S/N: 1M2408260070-05.A3L	Test Dates: 10/14/2024 – 11/1/2024	Apparatus/Device: Portable Handset		Page 12 of 21

7 INFORMATIVE MEASUREMENT UNCERTAINTY

7.1 Uncertainty Budget of Peak Incident H-Field

DASY6 Uncertainty Budget for Peak Incident <i>H</i> -field according to IEC/IEEE 63184						
Item	Error Description	Unc. Value (±dB)	Probab. Distr.	Div.	(c_i)	Std. Unc. (±dB)
Measurement system						
1	Amplitude calibration uncertainty	0.35	N	1	1	0.35
2	Probe anisotropy	0.6	R	$\sqrt{3}$	1	0.35
3	Probe dynamic linearity	0.2	R	$\sqrt{3}$	1	0.12
4	Probe frequency domain response	0.3	R	$\sqrt{3}$	1	0.17
5	Probe frequency linear interp. fit	0.15	R	$\sqrt{3}$	1	0.09
6	Spatial averaging	0.1	R	$\sqrt{3}$	1	0.06
7	Parasitic E-field sensitivity	0.1	R	$\sqrt{3}$	1	0.06
8	Detection limit	0.15	R	$\sqrt{3}$	1	0.09
9	Readout electronics	0	N	1	1	0
10	Probe positioning	0.19	N	1	1	0.19
11	Repeatability	0.1	N	1	1	0.10
12	Surface field reconstruction	0.3	N	1	1	0.3
Combined uncertainty ($k = 1$)						0.67
Expanded uncertainty ($k = 2$)						1.33 (16.6%)

7.2 Uncertainty Budget of Peak Incident E-Field

DASY6 Uncertainty Budget for Incident <i>E</i> -field according to IEC/IEEE 63184						
Item	Error Description	Unc. Value (±dB)	Probab. Distr.	Div.	(c_i)	Std. Unc. (±dB)
Measurement system						
1	Amplitude calibration uncertainty	0.53	N	1	1	0.53
2	Probe anisotropy	0.8	R	$\sqrt{3}$	1	0.46
3	Probe dynamic linearity	1	R	$\sqrt{3}$	1	0.58
4	Probe frequency domain response	0.3	R	$\sqrt{3}$	1	0.17
5	Probe frequency linear interp. fit	0.15	R	$\sqrt{3}$	1	0.09
6	Parasitic H-field sensitivity	0.2	R	$\sqrt{3}$	1	0.12
7	Detection limit	0.15	R	$\sqrt{3}$	1	0.09
8	Readout electronics	0	N	1	1	0
9	Repeatability	0.1	N	1	1	0.10
Combined uncertainty ($k = 1$)						0.95
Expanded uncertainty ($k = 2$)						1.89 (24.4%)

FCC ID: A3LSMS938JPN		WPT RF EXPOSURE EVALUATION REPORT		Reviewed by: Technical Manager
Test Report S/N: 1M2408260070-05.A3L	Test Dates: 10/14/2024 – 11/1/2024	Apparatus/Device: Portable Handset		Page 13 of 21

7.3 Uncertainty Budget of Cube Average E_{ind}

DASY6 Uncertainty Budget for Peak $2 \times 2 \times 2 \text{ mm}^3$ Cube-Average E_{ind} according to IEC/IEEE 63184						
Item	Error Description	Unc. Value ($\pm \text{dB}$)	Probab. Distr.	Div.	(c_i)	Std. Unc. ($\pm \text{dB}$)
Measurement system						
1	Amplitude calibration uncertainty	0.35	N	1	1	0.35
2	Probe anisotropy	0.6	R	$\sqrt{3}$	1	0.35
3	Probe dynamic linearity	0.2	R	$\sqrt{3}$	1	0.12
4	Probe frequency domain response	0.3	R	$\sqrt{3}$	1	0.17
5	Probe frequency linear interp. fit	0.15	R	$\sqrt{3}$	1	0.09
6	Spatial averaging	0.1	R	$\sqrt{3}$	1	0.06
7	Parasitic E -field sensitivity	0.1	R	$\sqrt{3}$	1	0.06
8	Detection limit	0.15	R	$\sqrt{3}$	1	0.09
9	Readout electronics	0	N	1	1	0
10	Probe positioning	0.19	N	1	1	0.19
11	Repeatability	0.1	N	1	1	0.1
12	Surface field reconstruction	0.3	N	1	1	0.3
Numerical simulations						
13	Grid resolution	0.18	R	$\sqrt{3}$	1	0.10
14	Tissue parameters	0	R	$\sqrt{3}$	1	0
15	Exposure position	0	R	$\sqrt{3}$	1	0
16	Source representation	0.24	N	1	1	0.24
17	Convergence and power budget	0	R	$\sqrt{3}$	1	0
18	Boundary conditions	0.1	R	$\sqrt{3}$	1	0.06
19	Phantom loading/backscattering	0.1	R	$\sqrt{3}$	1	0.06
Combined uncertainty ($k = 1$)						0.72
Expanded uncertainty ($k = 2$)						1.44 (18.0%)

FCC ID: A3LSMS938JPN		WPT RF EXPOSURE EVALUATION REPORT		Reviewed by: Technical Manager
Test Report S/N: 1M2408260070-05.A3L	Test Dates: 10/14/2024 – 11/1/2024	Apparatus/Device: Portable Handset		Page 14 of 21

7.4 Uncertainty Budget of Line Average E_{ind}

DASY6 Uncertainty Budget for Peak 5 mm Line-Average E_{ind} according to IEC/IEEE 63184						
Item	Error Description	Unc. Value ($\pm$ dB)	Probab. Distr.	Div.	(c_i)	Std. Unc. ($\pm$ dB)
Measurement system						
1	Amplitude calibration uncertainty	0.35	N	1	1	0.35
2	Probe anisotropy	0.6	R	$\sqrt{3}$	1	0.35
3	Probe dynamic linearity	0.2	R	$\sqrt{3}$	1	0.12
4	Probe frequency domain response	0.3	R	$\sqrt{3}$	1	0.17
5	Probe frequency linear interp. fit	0.15	R	$\sqrt{3}$	1	0.09
6	Spatial averaging	0.1	R	$\sqrt{3}$	1	0.06
7	Parasitic E -field sensitivity	0.1	R	$\sqrt{3}$	1	0.06
8	Detection limit	0.15	R	$\sqrt{3}$	1	0.09
9	Readout electronics	0	N	1	1	0
10	Probe positioning	0.19	N	1	1	0.19
11	Repeatability	0.1	N	1	1	0.1
12	Surface field reconstruction	0.3	N	1	1	0.3
Numerical simulations						
13	Grid resolution	0.25	R	$\sqrt{3}$	1	0.14
14	Tissue parameters	0	R	$\sqrt{3}$	1	0
15	Exposure position	0	R	$\sqrt{3}$	1	0
16	Source representation	0.27	N	1	1	0.27
17	Convergence and power budget	0	R	$\sqrt{3}$	1	0
18	Boundary conditions	0.1	R	$\sqrt{3}$	1	0.06
19	Phantom loading/backscattering	0.1	R	$\sqrt{3}$	1	0.06
Combined uncertainty ($k = 1$)						0.74
Expanded uncertainty ($k = 2$)						1.48 (18.5%)

FCC ID: A3LSMS938JPN		WPT RF EXPOSURE EVALUATION REPORT		Reviewed by: Technical Manager
Test Report S/N: 1M2408260070-05.A3L	Test Dates: 10/14/2024 – 11/1/2024	Apparatus/Device: Portable Handset		Page 15 of 21

7.5 Uncertainty Budget of Local E_{ind}

DASY6 Uncertainty Budget for Peak Local E_{ind} according to IEC/IEEE 63184						
Item	Error Description	Unc. Value ($\pm$ dB)	Probab. Distr.	Div.	(c_i)	Std. Unc. ($\pm$ dB)
Measurement system						
1	Amplitude calibration uncertainty	0.35	N	1	1	0.35
2	Probe anisotropy	0.6	R	$\sqrt{3}$	1	0.35
3	Probe dynamic linearity	0.2	R	$\sqrt{3}$	1	0.12
4	Probe frequency domain response	0.3	R	$\sqrt{3}$	1	0.17
5	Probe frequency linear interp. fit	0.15	R	$\sqrt{3}$	1	0.09
6	Spatial averaging	0.1	R	$\sqrt{3}$	1	0.06
7	Parasitic E -field sensitivity	0.1	R	$\sqrt{3}$	1	0.06
8	Detection limit	0.15	R	$\sqrt{3}$	1	0.09
9	Readout electronics	0	N	1	1	0
10	Probe positioning	0.19	N	1	1	0.19
11	Repeatability	0.1	N	1	1	0.1
12	Surface field reconstruction	0.3	N	1	1	0.3
Numerical simulations						
13	Grid resolution	0.09	R	$\sqrt{3}$	1	0.05
14	Tissue parameters	0	R	$\sqrt{3}$	1	0
15	Exposure position	0	R	$\sqrt{3}$	1	0
16	Source representation	0.27	N	1	1	0.27
17	Convergence and power budget	0	R	$\sqrt{3}$	1	0
18	Boundary conditions	0.1	R	$\sqrt{3}$	1	0.06
19	Phantom loading/backscattering	0.1	R	$\sqrt{3}$	1	0.06
Combined uncertainty ($k = 1$)						0.73
Expanded uncertainty ($k = 2$)						1.45 (18.2%)

FCC ID: A3LSMS938JPN		WPT RF EXPOSURE EVALUATION REPORT		Reviewed by: Technical Manager
Test Report S/N: 1M2408260070-05.A3L	Test Dates: 10/14/2024 – 11/1/2024	Apparatus/Device: Portable Handset		Page 16 of 21

7.6 Uncertainty Budget of Peak 1 cm² Area Average J_{ind}

DASY6 Uncertainty Budget for Peak 1 cm ² Area-Average J _{ind} according to IEC/IEEE 63184						
Item	Error Description	Unc. Value (±dB)	Probab. Distr.	Div.	(c _i)	Std. Unc. (±dB)
Measurement system						
1	Amplitude calibration uncertainty	0.35	N	1	1	0.35
2	Probe anisotropy	0.6	R	√3	1	0.35
3	Probe dynamic linearity	0.2	R	√3	1	0.12
4	Probe frequency domain response	0.3	R	√3	1	0.17
5	Probe frequency linear interp. fit	0.15	R	√3	1	0.09
6	Spatial averaging	0.1	R	√3	1	0.06
7	Parasitic E-field sensitivity	0.1	R	√3	1	0.06
8	Detection limit	0.15	R	√3	1	0.09
9	Readout electronics	0	N	1	1	0
10	Probe positioning	0.19	N	1	1	0.19
11	Repeatability	0.1	N	1	1	0.1
12	Surface field reconstruction	0.3	N	1	1	0.3
Numerical simulations						
13	Grid resolution	0.12	R	√3	1	0.07
14	Tissue parameters	0	R	√3	1	0
15	Exposure position	0	R	√3	1	0
16	Source representation	0.1	N	1	1	0.1
17	Convergence and power budget	0	R	√3	1	0
18	Boundary conditions	0.1	R	√3	1	0.06
19	Phantom loading/backscattering	0.1	R	√3	1	0.06
Combined uncertainty (<i>k</i> = 1)						0.68
Expanded uncertainty (<i>k</i> = 2)						1.36 (17.0%)

FCC ID: A3LSMS938JPN		WPT RF EXPOSURE EVALUATION REPORT		Reviewed by: Technical Manager
Test Report S/N: 1M2408260070-05.A3L	Test Dates: 10/14/2024 – 11/1/2024	Apparatus/Device: Portable Handset		Page 17 of 21

7.7 Uncertainty Budget of psSAR 1g

DASY6 Uncertainty Budget for psSAR1 g according to IEC/IEEE 63184						
Item	Error Description	Unc. Value (±dB)	Probab. Distr.	Div.	(c_i)	Std. Unc. (±dB)
Measurement system						
1	Amplitude calibration uncertainty	0.35	N	1	1	0.35
2	Probe anisotropy	0.6	R	$\sqrt{3}$	1	0.35
3	Probe dynamic linearity	0.2	R	$\sqrt{3}$	1	0.12
4	Probe frequency domain response	0.3	R	$\sqrt{3}$	1	0.17
5	Probe frequency linear interp. fit	0.15	R	$\sqrt{3}$	1	0.09
6	Spatial averaging	0.1	R	$\sqrt{3}$	1	0.06
7	Parasitic <i>E</i> -field sensitivity	0.1	R	$\sqrt{3}$	1	0.06
8	Detection limit	0.15	R	$\sqrt{3}$	1	0.09
9	Readout electronics	0	N	1	1	0
10	Probe positioning	0.19	N	1	1	0.19
11	Repeatability	0.1	N	1	1	0.1
12	Surface field reconstruction	0.2	N	1	1	0.2
Numerical simulations						
13	Grid resolution	0.02	R	$\sqrt{3}$	1	0.01
14	Tissue parameters	0	R	$\sqrt{3}$	1	0
15	Exposure position	0	R	$\sqrt{3}$	1	0
16	Source representation	0.09	N	1	1	0.09
17	Convergence and power budget	0	R	$\sqrt{3}$	1	0
18	Boundary conditions	0.1	R	$\sqrt{3}$	1	0.06
19	Phantom loading/backscattering	0.1	R	$\sqrt{3}$	1	0.06
Combined uncertainty ($k = 1$)						0.63
Expanded uncertainty ($k = 2$)						1.27 (33.9%)

FCC ID: A3LSMS938JPN		WPT RF EXPOSURE EVALUATION REPORT		Reviewed by: Technical Manager
Test Report S/N: 1M2408260070-05.A3L	Test Dates: 10/14/2024 – 11/1/2024	Apparatus/Device: Portable Handset		Page 18 of 21

7.8 Uncertainty Budget of psSAR 10g

DASY6 Uncertainty Budget for psSAR10g according to IEC/IEEE 63184						
Item	Error Description	Unc. Value (±dB)	Probab. Distr.	Div.	(c_i)	Std. Unc. (±dB)
Measurement system						
1	Amplitude calibration uncertainty	0.35	N	1	1	0.35
2	Probe anisotropy	0.6	R	$\sqrt{3}$	1	0.35
3	Probe dynamic linearity	0.2	R	$\sqrt{3}$	1	0.12
4	Probe frequency domain response	0.3	R	$\sqrt{3}$	1	0.17
5	Probe frequency linear interp. fit	0.15	R	$\sqrt{3}$	1	0.09
6	Spatial averaging	0.1	R	$\sqrt{3}$	1	0.06
7	Parasitic E -field sensitivity	0.1	R	$\sqrt{3}$	1	0.06
8	Detection limit	0.15	R	$\sqrt{3}$	1	0.09
9	Readout electronics	0	N	1	1	0
10	Probe positioning	0.19	N	1	1	0.19
11	Repeatability	0.1	N	1	1	0.1
12	Surface field reconstruction	0.2	N	1	1	0.2
Numerical simulations						
13	Grid resolution	0	R	$\sqrt{3}$	1	0
14	Tissue parameters	0	R	$\sqrt{3}$	1	0
15	Exposure position	0	R	$\sqrt{3}$	1	0
16	Source representation	0.04	N	1	1	0.04
17	Convergence and power budget	0	R	$\sqrt{3}$	1	0
18	Boundary conditions	0.1	R	$\sqrt{3}$	1	0.06
19	Phantom loading/backscattering	0.1	R	$\sqrt{3}$	1	0.06
Combined uncertainty ($k = 1$)						0.63
Expanded uncertainty ($k = 2$)						1.25 (33.4%)

FCC ID: A3LSMS938JPN		WPT RF EXPOSURE EVALUATION REPORT		Reviewed by: Technical Manager
Test Report S/N: 1M2408260070-05.A3L	Test Dates: 10/14/2024 – 11/1/2024	Apparatus/Device: Portable Handset		Page 19 of 21

8.1 Measurement Conclusion

The RF exposure evaluation indicates that the DUT complies with the exposure limits presented in FCC 47 CFR Part 2.1093 and KDB 680106 D01 v03r01 with respect to all parameters subject to this test. The worst-case configuration was evaluated against and satisfies the requirement of peak special SAR < 1.6 W/kg. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

FCC ID: A3LSMS938JPN		WPT RF EXPOSURE EVALUATION REPORT	Reviewed by: Technical Manager
Test Report S/N: 1M2408260070-05.A3L	Test Dates: 10/14/2024 – 11/1/2024	Apparatus/Device: Portable Handset	Page 20 of 21

9

REFERENCES

- [1] ICNIRP – International Commission on Non-Ionizing Radiation Protection (1998). Guidelines for limiting exposure to time varying electric, magnetic and electromagnetic fields (up to 300 GHz). Health Physics 74(4), 494-522
- [2] IEEE Standards Coordinating Committee 28. IEEE standard for safety levels with respect to human exposure to electromagnetic fields, 0-3 kHz. New York, NY, IEEE - The Institute of Electrical and Electronics Engineers, 2002 (IEEE Std C95.6-2002)
- [3] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [4] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006
- [5] RSS-102 Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), Issue 5, March 2015
- [6] RSS-102.NS.MEAS — Measurement Procedure for Assessing Nerve Stimulation (NS) Compliance in Accordance with RSS-102
- [7] SPR-002 Supplementary Procedure for Assessing Compliance with RSS-102 Nerve Stimulation Exposure Limits, Issue 1, September 2016
- [8] IEC 62369-1, Evaluation of human exposure to electromagnetic fields from short range devices (SRDs) in various applications of the frequency range 0 GHz to 300 GHz – Part 1: Fields produced by devices used for electronic article surveillance, radio frequency identification and similar systems, 1st ed., 2008
- [9] ITU-T K.61, Guidance on measurement and numerical prediction of electromagnetic fields for compliance with human exposure limits for telecommunication installations, 2008
- [10] WHO - World Health Organization. Extremely low frequency fields. Environmental Health Criteria, Vol. 238. Geneva, World Health Organization, 2007
- [11] FCC Office of Engineering and Technology KDB, “KDB 680106 D01 v03r01,” October 24, 2023
- [12] FCC Office of Engineering and Technology, FCC 47 CFR Part 2.1093, October 21, 2024

FCC ID: A3LSMS938JPN		WPT RF EXPOSURE EVALUATION REPORT	Reviewed by: Technical Manager
Test Report S/N: 1M2408260070-05.A3L	Test Dates: 10/14/2024 – 11/1/2024	Apparatus/Device: Portable Handset	Page 21 of 21

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.