

PART 24 MEASUREMENT REPORT**Applicant Name:**

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

9/3/2024 - 10/17/2024

Test Report Issue Date:

10/29/2024

Test Site/Location:

Element Lab., Columbia, MD, USA

Element Lab., Morgan Hill, CA, USA

Test Report Serial No.:

1M2408260067-02-R1.A3L

FCC ID:

A3LSMS938U

APPLICANT:

Samsung Electronics Co., Ltd.

Application Type:

Certification

Model:

SM-S938U

Additional Model(s):

SM-S938U1

EUT Type:

Portable Handset

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part:

24

Test Procedure(s):

ANSI C63.26-2015, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1M2408260067-02-R1.A3L) supersedes and replaces the previously issued test report (S/N: 1M2408260067-02.A3L on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez
Executive Vice President



FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 1 of 174

TABLE OF CONTENTS

1.0	INTRODUCTION	5
1.1	Scope	5
1.2	Element Test Location.....	5
1.3	Test Facility / Accreditations.....	5
2.0	PRODUCT INFORMATION.....	6
2.1	Equipment Description	6
2.2	Device Capabilities.....	6
2.3	Test Configuration	6
2.4	Software and Firmware	6
2.5	EMI Suppression Device(s)/Modifications	6
3.0	DESCRIPTION OF TESTS	7
3.1	Evaluation Procedure	7
3.2	Radiated Power and Radiated Spurious Emissions	7
4.0	MEASUREMENT UNCERTAINTY	8
5.0	TEST EQUIPMENT CALIBRATION DATA	9
6.0	SAMPLE EMISSION DESIGNATORS	10
7.0	TEST RESULTS	11
7.1	Summary.....	11
7.2	Conducted Output Power Data	12
7.3	Occupied Bandwidth	15
7.4	Spurious and Harmonic Emissions at Antenna Terminal	56
7.5	Band Edge Emissions at Antenna Terminal	87
7.6	Peak-Average Ratio	107
7.7	Radiated Power (EIRP).....	148
7.8	Radiated Spurious Emissions Measurements.....	154
7.9	Frequency Stability / Temperature Variation	169
8.0	CONCLUSION	174

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 2 of 174

PART 24 MEASUREMENT REPORT

Antenna-1						
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
GSM/GPRS	N/A	GMSK	1850.2 - 1909.8	0.500	26.99	245KGXW
EDGE	N/A	8-PSK	1850.2 - 1909.8	0.178	22.51	242KG7W
WCDMA	N/A	Spread Spectrum	1852.4 - 1907.6	0.212	23.26	4M18F9W
LTE Band 25/2	20 MHz	QPSK	1860 - 1905	0.185	22.67	18M0G7D
		16QAM	1860 - 1905	0.150	21.75	18M0W7D
	15 MHz	QPSK	1857.5 - 1907.5	0.175	22.43	13M5G7D
		16QAM	1857.5 - 1907.5	0.137	21.38	13M5W7D
	10 MHz	QPSK	1855 - 1910	0.173	22.37	9M02G7D
		16QAM	1855 - 1910	0.142	21.53	9M02W7D
	5 MHz	QPSK	1852.5 - 1912.5	0.176	22.47	4M53G7D
		16QAM	1852.5 - 1912.5	0.141	21.50	4M53W7D
	3 MHz	QPSK	1851.5 - 1913.5	0.179	22.54	2M71G7D
		16QAM	1851.5 - 1913.5	0.141	21.49	2M71W7D
	1.4 MHz	QPSK	1850.7 - 1914.3	0.177	22.49	1M10G7D
		16QAM	1850.7 - 1914.3	0.138	21.40	1M11W7D
NR Band n25/2	40 MHz	$\pi/2$ BPSK	1870 - 1895	0.226	23.54	38M7G7D
		QPSK	1870 - 1895	0.214	23.29	38M7G7D
		16QAM	1870 - 1895	0.168	22.26	38M7W7D
	35 MHz	$\pi/2$ BPSK	1867.5 - 1897.5	0.235	23.70	32M4G7D
		QPSK	1867.5 - 1897.5	0.235	23.72	33M8G7D
		16QAM	1867.5 - 1897.5	0.190	22.79	33M8W7D
	30 MHz	$\pi/2$ BPSK	1865 - 1900	0.239	23.79	28M8G7D
		QPSK	1865 - 1900	0.225	23.53	28M8G7D
		16QAM	1865 - 1900	0.171	22.34	28M7W7D
	25 MHz	$\pi/2$ BPSK	1862.5 - 1902.5	0.235	23.71	23M0G7D
		QPSK	1862.5 - 1902.5	0.223	23.49	23M9G7D
		16QAM	1862.5 - 1902.5	0.189	22.76	23M9W7D
	20 MHz	$\pi/2$ BPSK	1860 - 1905	0.230	23.62	18M0G7D
		QPSK	1860 - 1905	0.229	23.61	19M0G7D
		16QAM	1860 - 1905	0.165	22.18	19M1W7D
	15 MHz	$\pi/2$ BPSK	1857.5 - 1907.5	0.227	23.56	13M5G7D
		QPSK	1857.5 - 1907.5	0.229	23.59	14M2G7D
		16QAM	1857.5 - 1907.5	0.174	22.40	14M2W7D
	10 MHz	$\pi/2$ BPSK	1855 - 1910	0.224	23.50	9M00G7D
		QPSK	1855 - 1910	0.217	23.36	9M35G7D
		16QAM	1855 - 1910	0.175	22.44	9M35W7D
	5 MHz	$\pi/2$ BPSK	1852.5 - 1912.5	0.211	23.23	4M52G7D
		QPSK	1852.5 - 1912.5	0.211	23.24	4M52G7D
		16QAM	1852.5 - 1912.5	0.161	22.07	4M52W7D

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 3 of 174

Antenna-2						
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
LTE Band 25/2	20 MHz	QPSK	1860 - 1905	0.107	20.28	18M0G7D
		16QAM	1860 - 1905	0.089	19.51	18M0W7D
	15 MHz	QPSK	1857.5 - 1907.5	0.109	20.37	13M6G7D
		16QAM	1857.5 - 1907.5	0.091	19.59	13M5W7D
	10 MHz	QPSK	1855 - 1910	0.106	20.25	9M00G7D
		16QAM	1855 - 1910	0.091	19.61	9M00W7D
	5 MHz	QPSK	1852.5 - 1912.5	0.108	20.35	4M52G7D
		16QAM	1852.5 - 1912.5	0.095	19.76	4M51W7D
	3 MHz	QPSK	1851.5 - 1913.5	0.103	20.15	2M71G7D
		16QAM	1851.5 - 1913.5	0.091	19.58	2M72W7D
	1.4 MHz	QPSK	1850.7 - 1914.3	0.103	20.14	1M09G7D
		16QAM	1850.7 - 1914.3	0.091	19.59	1M10W7D
NR Band n25/2	40 MHz	$\pi/2$ BPSK	1870 - 1895	0.090	19.55	38M8G7D
		QPSK	1870 - 1895	0.092	19.66	38M9G7D
		16QAM	1870 - 1895	0.071	18.54	38M8W7D
	35 MHz	$\pi/2$ BPSK	1867.5 - 1897.5	0.091	19.61	32M4G7D
		QPSK	1867.5 - 1897.5	0.093	19.67	33M8G7D
		16QAM	1867.5 - 1897.5	0.075	18.77	33M8W7D
	30 MHz	$\pi/2$ BPSK	1865 - 1900	0.091	19.60	28M9G7D
		QPSK	1865 - 1900	0.093	19.69	28M8G7D
		16QAM	1865 - 1900	0.077	18.86	28M7W7D
	25 MHz	$\pi/2$ BPSK	1862.5 - 1902.5	0.093	19.69	23M1G7D
		QPSK	1862.5 - 1902.5	0.095	19.79	23M9G7D
		16QAM	1862.5 - 1902.5	0.075	18.77	23M9W7D
	20 MHz	$\pi/2$ BPSK	1860 - 1905	0.093	19.69	18M0G7D
		QPSK	1860 - 1905	0.087	19.41	19M0G7D
		16QAM	1860 - 1905	0.073	18.61	19M1W7D
	15 MHz	$\pi/2$ BPSK	1857.5 - 1907.5	0.092	19.64	13M5G7D
		QPSK	1857.5 - 1907.5	0.094	19.74	14M2G7D
		16QAM	1857.5 - 1907.5	0.075	18.77	14M2W7D
	10 MHz	$\pi/2$ BPSK	1855 - 1910	0.093	19.70	9M02G7D
		QPSK	1855 - 1910	0.098	19.92	9M36G7D
		16QAM	1855 - 1910	0.075	18.76	9M34W7D
	5 MHz	$\pi/2$ BPSK	1852.5 - 1912.5	0.092	19.66	4M49G7D
		QPSK	1852.5 - 1912.5	0.095	19.80	4M50G7D
		16QAM	1852.5 - 1912.5	0.077	18.84	4M51W7D

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 4 of 174

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

Measurements were conducted at the Element laboratory(ies) indicated in Section 1.3 below. All measurement facilities are compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A. ("MD")

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 5 of 174

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMS938U**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 24 and RSS-133.

Test Device Serial No.: 0286M, 0334M, 0099M, 0084M, 0081M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 800/1900 GSM/GPRS/EDGE, GSM/GPRS/EDGE, WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR, WLAN, UNII, Bluetooth (1x, EDR, LE), NFC, WPT, UWB, UWB

This device uses a tuner circuit that dynamically updates the antenna impedance parameters to optimize antenna performance for certain bands and modes of operation. The tuner for this device was set to simulate a "free space" condition where the transmit antenna is matched to the medium into which it is transmitting and, thus, the power is at its maximum level.

2.3 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: EP-P2400 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

Band	Ant 1	Ant 2
GSM/GPRS PCS	Ant A	N/A
WCDMA PCS	Ant A	N/A
LTE Band 25/2	Ant A	Ant F
NR Band 25/2	Ant A	Ant F

Table 2-1. Antenna Naming Convention

2.4 Software and Firmware

Testing was performed on device(s) using software/firmware version S938USQUOAXJ3 installed on the EUT.

2.5 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 6 of 174

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services” (ANSI C63.26-2015) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI C63.26-2015. For emissions below 1GHz, a half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]};$$

where P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

For radiated spurious emissions measurements, the field strength conversion method is used per the formulas in Section 5.2.7 of ANSI C63.26-2015. Field Strength (EIRP) is calculated using the following formulas:

$$E_{\text{[dB}\mu\text{V/m]}} = \text{Measured amplitude level}_{\text{[dBm]}} + 107 + \text{Cable Loss}_{\text{[dB]}} + \text{Antenna Factor}_{\text{[dB/m]}}$$

And

$$\text{EIRP}_{\text{[dBm]}} = E_{\text{[dB}\mu\text{V/m]}} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015.

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 7 of 174

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

Table 4-1. Measurement Uncertainty Budget – MD

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 8 of 174

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	AP2	EMC Cable and Switch System	4/2/2024	Annual	4/2/2025	AP2
-	AP1	EMC Cable and Switch System	4/2/2024	Annual	4/2/2025	AP1
-	ETS	EMC Cable and Switch System	4/2/2024	Annual	4/2/2025	ETS
-	LTx1	Licensed Transmitter Cable Set	4/2/2024	Annual	4/2/2025	LTx1
-	LTx4	Licensed Transmitter Cable Set	4/2/2024	Annual	4/2/2025	LTx4
-	LTx5	Licensed Transmitter Cable Set	4/2/2024	Annual	4/2/2025	LTx5
Agilent	N9030A	50GHz PXA Signal Analyzer	4/23/2024	Annual	4/23/2025	US51350301
Anritsu	MT8821C	Radio Communication Analyzer	N/A			6201381794
Emco	3116	Horn Antenna (18 - 40GHz)	7/5/2023	Triennial	7/5/2025	9203-2178
Espec	ESX-2CA	Environmental Chamber	9/26/2024	Annual	9/26/2026	17620
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	3/29/2023	Biennial	3/29/2025	128337
ETS Lindgren	3164-10	Quad Ridge Horn 400MHz - 10000MHz	7/13/2023	Biennial	7/13/2025	00166283
Keysight Technologies	N9020A	MXA Signal Analyzer	4/11/2024	Annual	4/11/2025	MY54500644
Keysight Technologies	N9030A	PXA Signal Analyzer	2/29/2024	Annual	3/1/2025	MY55410501
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11208010032
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11403100002
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			112347
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	10/16/2024	Annual	10/16/2025	100342
Rohde & Schwarz	FSW26	2Hz-26.5GHz Signal and Spectrum Analyzer	3/8/2024	Annual	3/8/2025	103187
Sunol	JB6	LB6 Antenna	3/2/2023	Biennial	3/2/2025	A082816

Table 5-1. Test Equipment Calibration Table – MD

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 9 of 174

6.0 SAMPLE EMISSION DESIGNATORS

GSM Emission Designator

Emission Designator = 250KGXW

GSM BW = 250 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 250KG7W

EDGE BW = 250 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M16F9W

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 10 of 174

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMS938U
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): GSM/GPRS/EDGE/WCDMA/LTE/NR

Test Condition	Test Description	FCC Part Section(s)	RSS Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Transmitter Conducted Output Power*	2.1046(a), 2.1046(c)	RSS-Gen(6.12)	N/A	PASS	See RF Exposure Report
	Occupied Bandwidth	2.1049(h)	RSS-Gen(6.7)	N/A	PASS	Section 7.2
	Conducted Band Edge / Spurious Emissions	2.1051, 24.238(a)	RSS-Gen(6.13), RSS-133(6.5)	> 43 + 10log10(P[Watts]) at Band Edge and for all out-of-band emissions	PASS	Sections 7.3, 7.4
	Peak-to-Average Ratio	24.232(d)	RSS-133(6.4)	≤ 13 dB	PASS	Section 7.5
	Frequency Stability	2.1055, 24.235	RSS-Gen(6.11), RSS-133(6.3)	Fundamental emissions stay within authorized frequency block **Carrier frequency shall not depart from the reference frequency in excess of ±2.5 ppm	PASS	Section 7.8
RADIATED	Equivalent Isotropic Radiated Power	24.232(c)	RSS-Gen(6.12), RSS-133(6.4)	< 2 Watts max. EIRP	PASS	Section 7.6
	Radiated Spurious Emissions	2.1053, 24.238(a)	RSS-Gen(6.13), RSS-133(6.5)	≥ 43 + 10 log (P[Watts]) dB of attenuation below transmitter power **Spurious emissions from receivers shall not exceed the limits detailed in RSS-Gen(7.3)	PASS	Section 7.7

* The only transmitter output conducted powers included in this report are those where the Pmax value, per the tune-up document, is higher than any of the DSI power levels. For the remaining conducted power measurements, see the **RF Exposure Report**.

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is EMC Software Tool v2.3.0.

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 11 of 174

7.2 Conducted Output Power Data

Test Overview

All emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 – Section 5.2

Test Settings

1. Detector = RMS
2. Trace mode = trace average for continuous emissions, max hold for pulse emissions
3. Sweep time = auto couple
4. The trace was allowed to stabilize
5. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

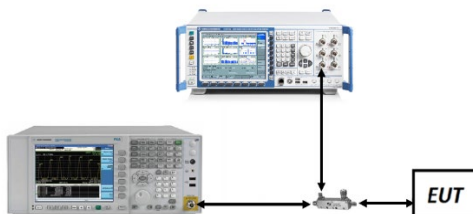


Figure 7-1. Test Instrument & Measurement Setup

Test Notes

1. Conducted power measurements were evaluated using various combinations of RB size, RB offset, modulation, and channel bandwidth. Channel bandwidth data is shown in the tables below based only on the channel bandwidths that were supported in this device.
2. All other conducted power measurements are contained in the RF exposure report for this filing.
3. Conducted power was found to reduce for the higher order QAM modulations when compared to 16QAM. Due to this trend, only the worst-case QAM (16QAM) powers are included in this section.

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 12 of 174

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	26140	1860.0	1 / 0	23.69
		26365	1882.5	1 / 50	23.69
		26590	1905.0	1 / 50	23.77
	16-QAM	26590	1905.0	1 / 0	22.86
15 MHz	QPSK	26115	1857.5	1 / 74	23.61
		26365	1882.5	1 / 74	23.75
		26615	1907.5	1 / 37	23.86
	16-QAM	26615	1907.5	1 / 74	22.94
10 MHz	QPSK	26090	1855.0	1 / 25	23.72
		26365	1882.5	1 / 0	23.53
		26640	1910.0	1 / 0	23.74
	16-QAM	26365	1882.5	1 / 49	23.14
5 MHz	QPSK	26065	1852.5	1 / 12	23.78
		26365	1882.5	1 / 12	23.78
		26665	1912.5	1 / 12	23.82
	16-QAM	26665	1912.5	1 / 24	23.11
3 MHz	QPSK	26055	1851.5	1 / 7	23.56
		26365	1882.5	1 / 14	23.57
		26675	1913.5	1 / 7	23.63
	16-QAM	26675	1913.5	1 / 7	22.92
1.4 MHz	QPSK	26047	1850.7	1 / 3	23.53
		26365	1882.5	1 / 0	23.57
		26683	1914.3	1 / 0	23.51
	16-QAM	26683	1914.3	1 / 0	22.93

Table 7-2. Conducted Powers – LTE Band 25/2 – Ant2

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 13 of 174

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
40 MHz	$\pi/2$ BPSK	374000	1870.0	1 / 214	23.93
		376500	1882.5	1 / 1	23.89
		379000	1895.0	1 / 214	23.90
	QPSK	374000	1870.0	1 / 214	24.01
		376500	1882.5	1 / 1	23.82
		379000	1895.0	1 / 214	23.77
	16-QAM	376500	1882.5	1 / 1	22.56
35 MHz	$\pi/2$ BPSK	373500	1867.5	1 / 186	23.82
		376500	1882.5	1 / 94	23.94
		379500	1897.5	1 / 1	24.00
	QPSK	373500	1867.5	1 / 186	23.75
		376500	1882.5	1 / 94	23.82
		379500	1897.5	1 / 1	24.00
	16-QAM	379500	1897.5	1 / 1	23.01
30 MHz	$\pi/2$ BPSK	372000	1865.0	1 / 158	23.91
		376500	1882.5	1 / 1	23.92
		381000	1900.0	1 / 158	23.99
	QPSK	372000	1865.0	1 / 158	24.18
		376500	1882.5	1 / 1	23.85
		381000	1900.0	1 / 158	23.91
	16-QAM	376500	1882.5	1 / 1	22.88
25 MHz	$\pi/2$ BPSK	372000	1862.5	1 / 1	24.04
		376500	1882.5	1 / 131	24.00
		381000	1902.5	1 / 66	24.08
	QPSK	372000	1862.5	1 / 1	24.09
		376500	1882.5	1 / 131	23.95
		381000	1902.5	1 / 66	23.90
	16-QAM	376500	1882.5	1 / 131	22.80
20 MHz	$\pi/2$ BPSK	372000	1860.0	1 / 104	23.80
		376500	1882.5	1 / 53	23.88
		381000	1905.0	1 / 53	24.08
	QPSK	372000	1860.0	1 / 104	23.78
		376500	1882.5	1 / 53	23.54
		381000	1905.0	1 / 53	23.79
	16-QAM	381000	1905.0	1 / 53	22.85
15 MHz	$\pi/2$ BPSK	371500	1857.5	1 / 1	24.02
		376500	1882.5	1 / 39	23.97
		381500	1907.5	1 / 1	24.01
	QPSK	371500	1857.5	1 / 1	23.87
		376500	1882.5	1 / 39	23.89
		381500	1907.5	1 / 1	23.91
	16-QAM	376500	1882.5	1 / 39	22.80
10 MHz	$\pi/2$ BPSK	371000	1855.0	1 / 1	24.00
		376500	1882.5	1 / 50	24.03
		382000	1910.0	1 / 26	23.97
	QPSK	371000	1855.0	1 / 1	23.90
		376500	1882.5	1 / 50	24.08
		382000	1910.0	1 / 26	23.80
	16-QAM	376500	1882.5	1 / 50	22.78
5 MHz	$\pi/2$ BPSK	370500	1852.5	1 / 23	24.04
		376500	1882.5	1 / 23	24.00
		382500	1912.5	1 / 23	23.97
	QPSK	370500	1852.5	1 / 23	23.73
		376500	1882.5	1 / 23	23.95
		382500	1912.5	1 / 23	23.71
	16-QAM	376500	1882.5	1 / 23	22.86

Table 7-3. Conducted Powers – NR Band n25/2 – Ant2

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 14 of 174

7.3 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst-case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 – Section 5.4.4

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

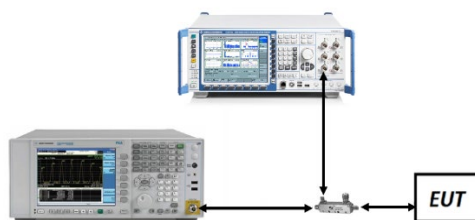


Figure 7-2. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 15 of 174

Mode	Bandwidth	Modulation	OBW [MHz]
GSM-PCS	N/A	GMSK	0.245
GSM-PCS EDGE		8-PSK	0.242
WCDMA-PCS		Spread Spectrum	4.177
LTE-B25-2	20MHz	QPSK	17.96
		16QAM	18.02
	15MHz	QPSK	13.52
		16QAM	13.46
	10MHz	QPSK	9.02
		16QAM	9.02
	5MHz	QPSK	4.53
		16QAM	4.53
	3MHz	QPSK	2.71
		16QAM	2.71
	1.4MHz	QPSK	1.10
		16QAM	1.11


Table 7-4. Occupied Bandwidth Test Results – Ant1

Mode	Bandwidth	Modulation	OBW [MHz]
NR-n25-2	40MHz	BPSK	38.75
		QPSK	38.71
		16QAM	38.75
	35MHz	BPSK	32.44
		QPSK	33.76
		16QAM	33.79
	30MHz	BPSK	28.79
		QPSK	28.77
		16QAM	28.70
	25MHz	BPSK	23.03
		QPSK	23.85
		16QAM	23.87
	20MHz	BPSK	18.01
		QPSK	18.96
		16QAM	19.07
	15MHz	BPSK	13.53
		QPSK	14.20
		16QAM	14.20
	10MHz	BPSK	9.00
		QPSK	9.35
		16QAM	9.35
	5MHz	BPSK	4.52
		QPSK	4.52
		16QAM	4.52

Table 7-5. Occupied Bandwidth Test Results – Ant1

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 16 of 174

GSM/GPRS PCS – Ant1

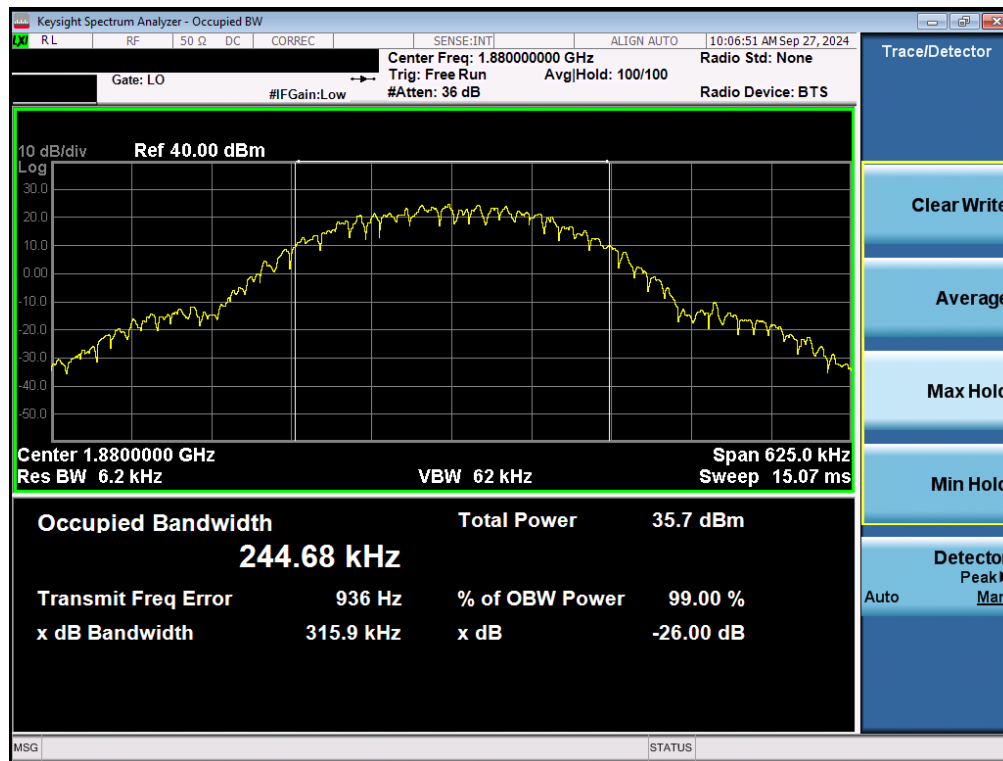


Plot 7-1. Occupied Bandwidth Plot (GPRS, Ch. 661 - Ant1)



Plot 7-2. Occupied Bandwidth Plot (EDGE, Ch. 661 - Ant1)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 17 of 174


WCDMA PCS – Ant1

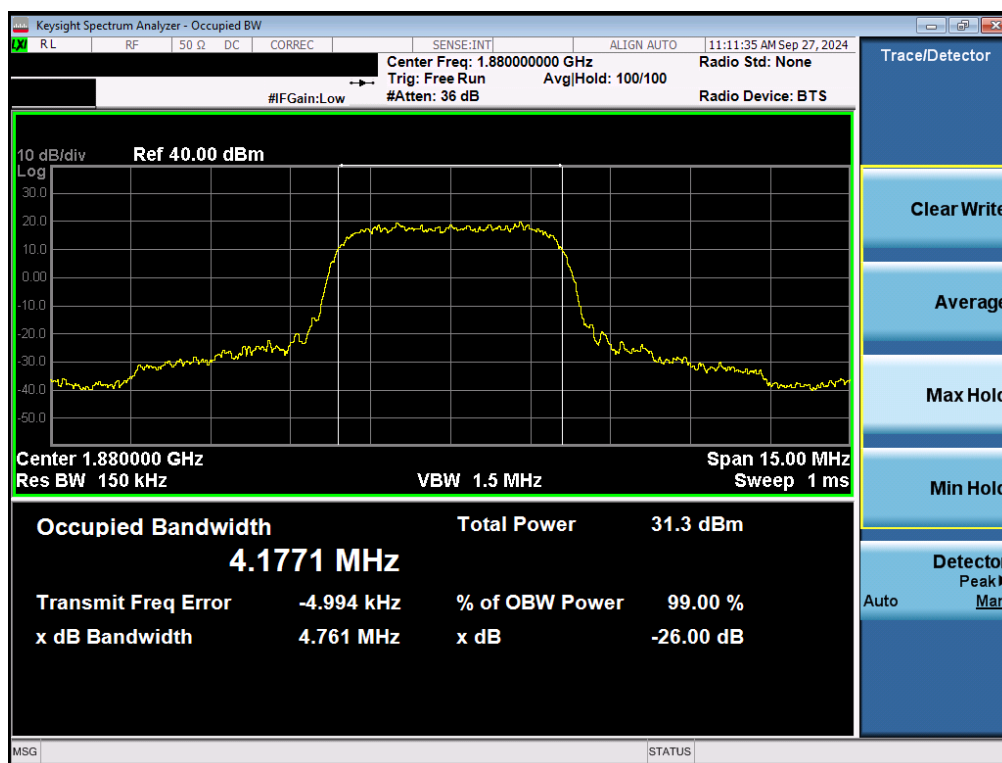


Plot 7-3. Occupied Bandwidth Plot (WCDMA, Ch. 9400 - Ant1)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 18 of 174

LTE Band 25/2 – Ant1

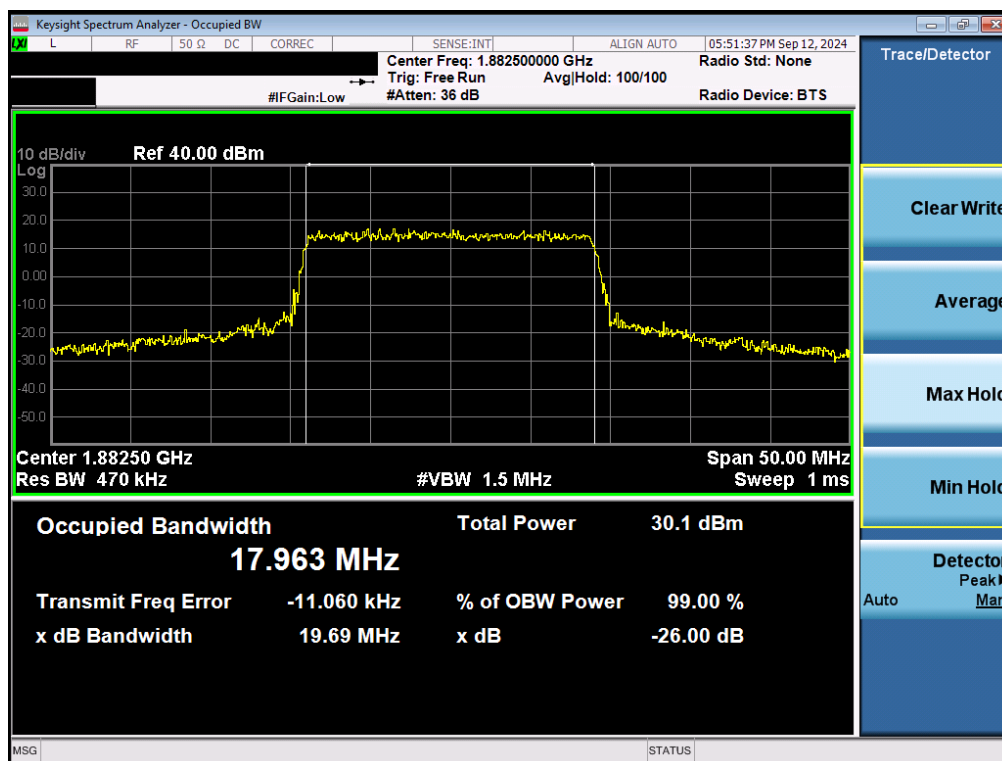


Plot 7-4. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz QPSK - Full RB - Ant1)

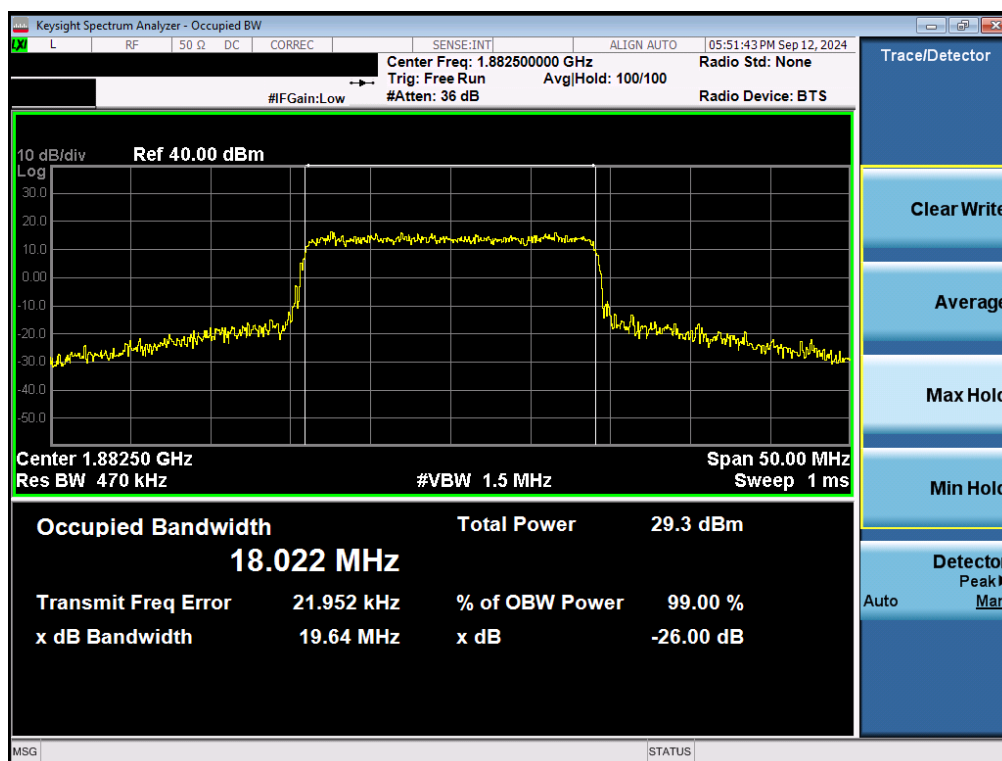


Plot 7-5. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz 16-QAM - Full RB - Ant1)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 19 of 174

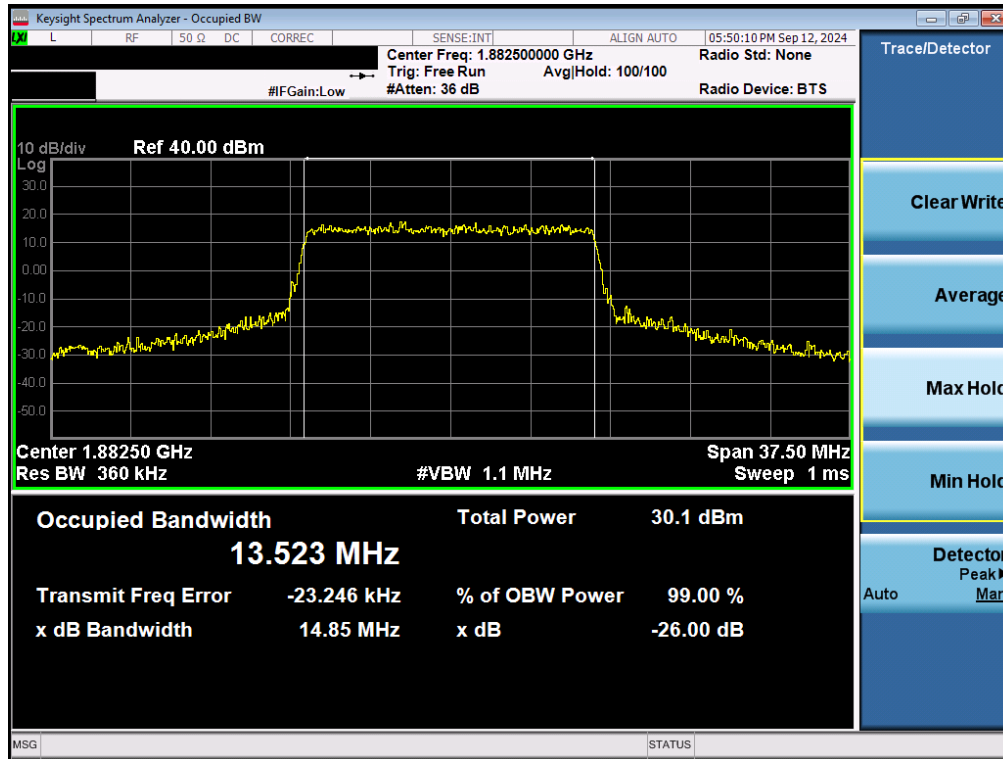

Plot 7-6. Occupied Bandwidth Plot (LTE Band 25/2 - 15MHz QPSK - Full RB - Ant1)

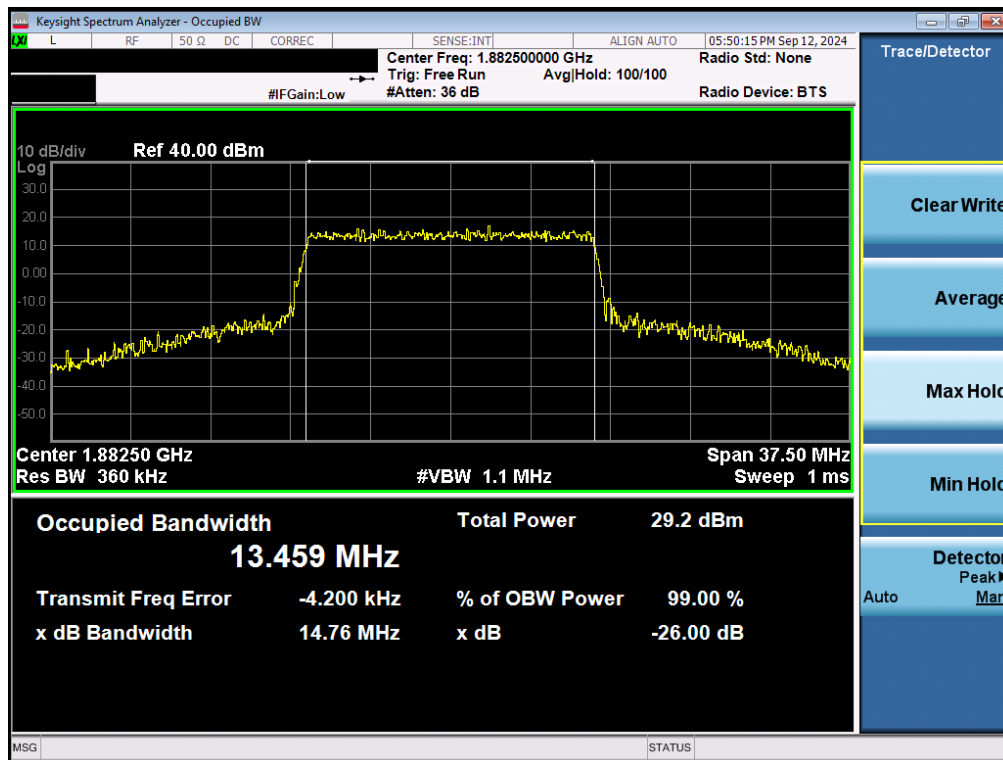


Plot 7-7. Occupied Bandwidth Plot (LTE Band 25/2 - 15MHz 16-QAM - Full RB - Ant1)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 20 of 174




Plot 7-8. Occupied Bandwidth Plot (LTE Band 25/2 - 10MHz QPSK - Full RB - Ant1)

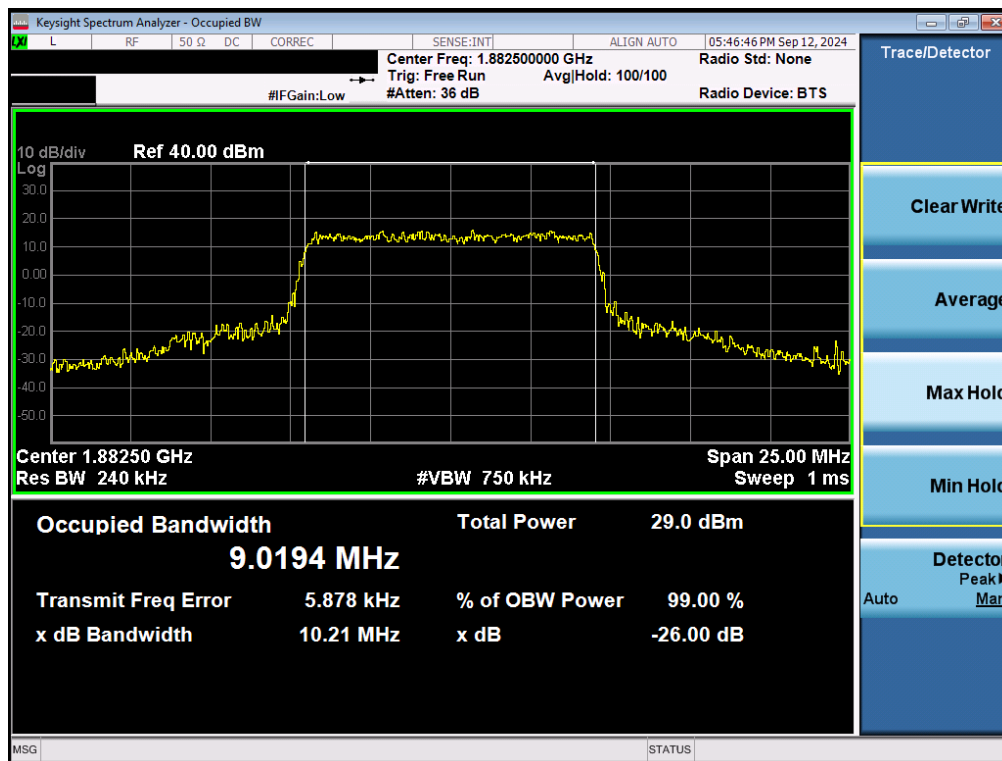


Plot 7-9. Occupied Bandwidth Plot (LTE Band 25/2 - 10MHz 16-QAM - Full RB - Ant1)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 21 of 174

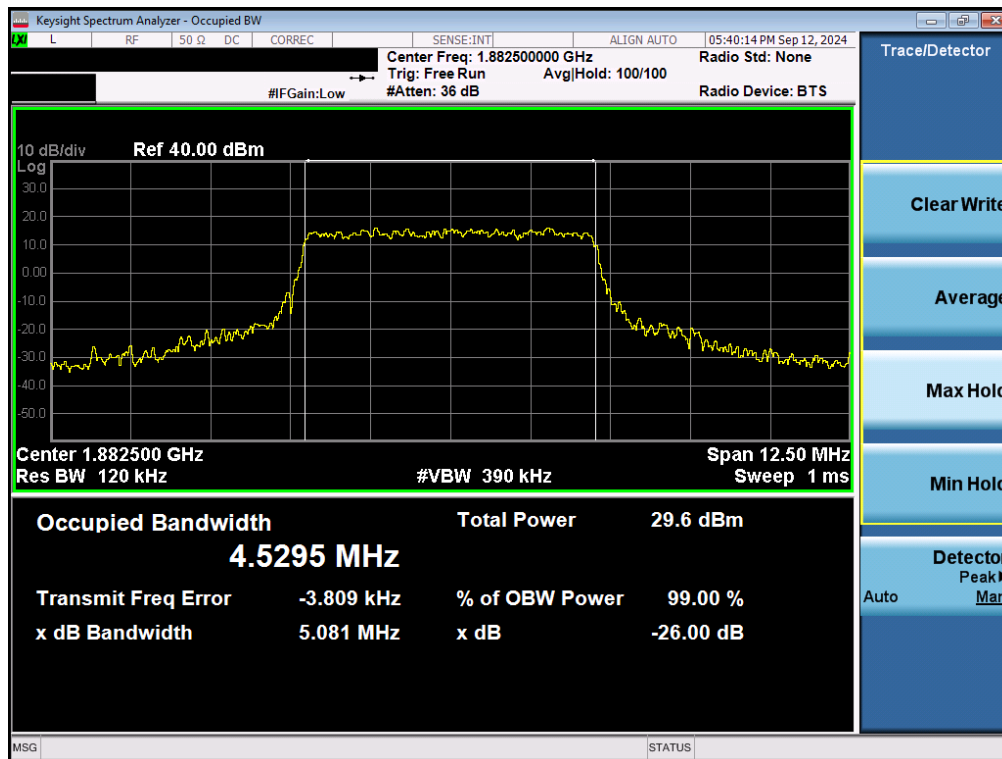

Plot 7-10. Occupied Bandwidth Plot (LTE Band 25/2 - 5MHz QPSK - Full RB - Ant1)

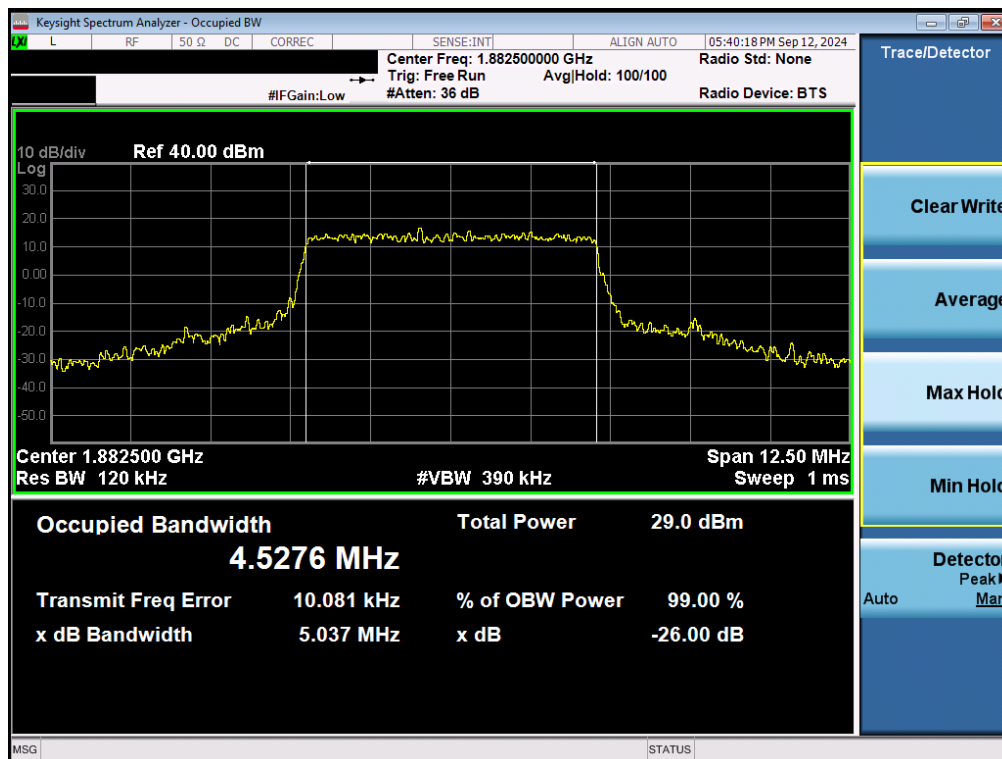


Plot 7-11. Occupied Bandwidth Plot (LTE Band 25/2 - 5MHz 16-QAM - Full RB - Ant1)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 22 of 174




Plot 7-12. Occupied Bandwidth Plot (LTE Band 25/2 - 3MHz QPSK - Full RB - Ant1)

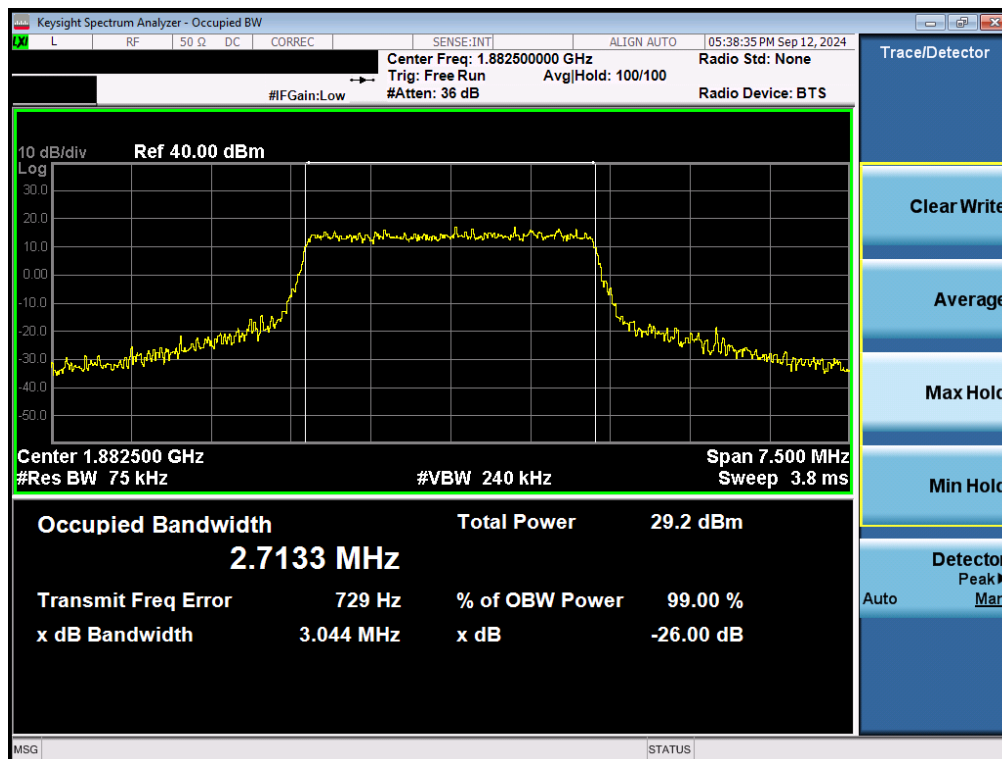

Plot 7-13. Occupied Bandwidth Plot (LTE Band 25/2 - 3MHz 16-QAM - Full RB - Ant1)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 23 of 174

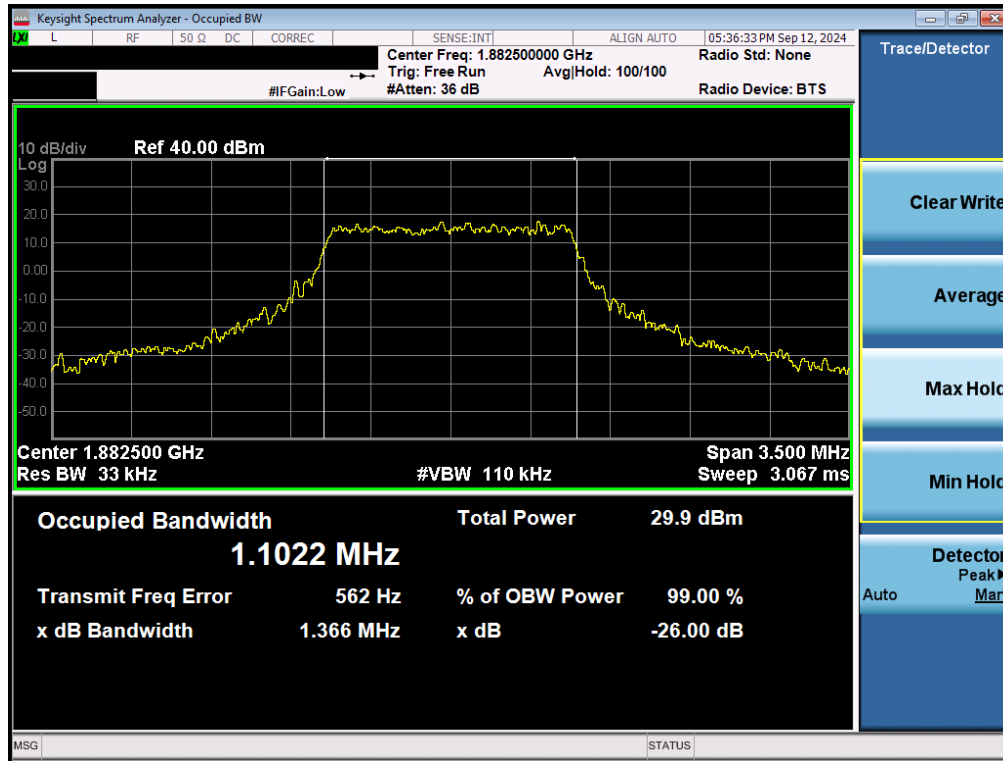


Plot 7-14. Occupied Bandwidth Plot (LTE Band 25/2 - 1.4MHz QPSK - Full RB - Ant1)




Plot 7-15. Occupied Bandwidth Plot (LTE Band 25/2 - 1.4MHz 16-QAM - Full RB - Ant1)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 24 of 174

NR Band n25/2 – Ant1

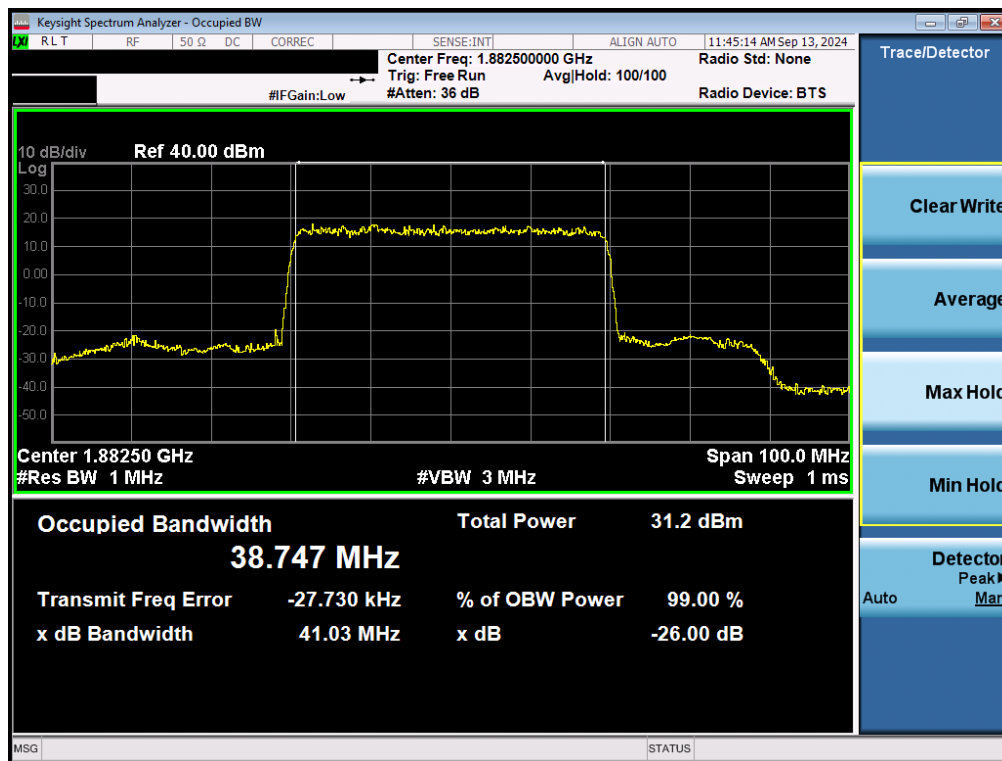


Plot 7-16. Occupied Bandwidth Plot (NR Band n25/2 - 40.0MHz DFT-s-OFDM BPSK - Full RB - ANT1)

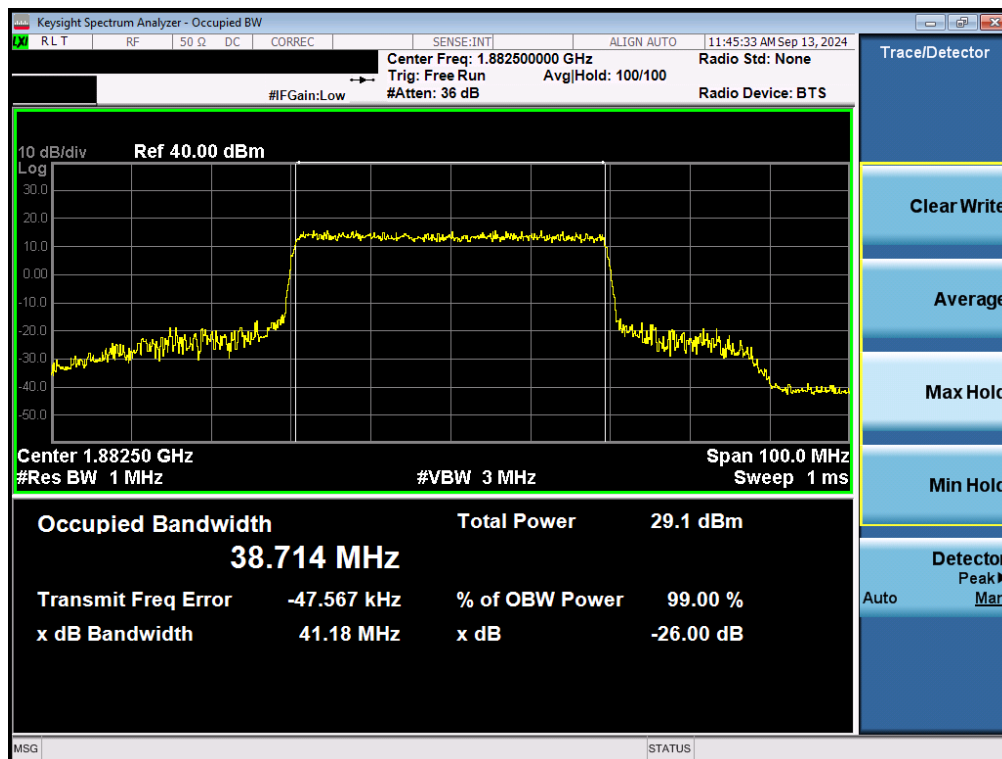


Plot 7-17. Occupied Bandwidth Plot (NR Band n25/2 - 40.0MHz CP-OFDM QPSK - Full RB - ANT1)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 25 of 174

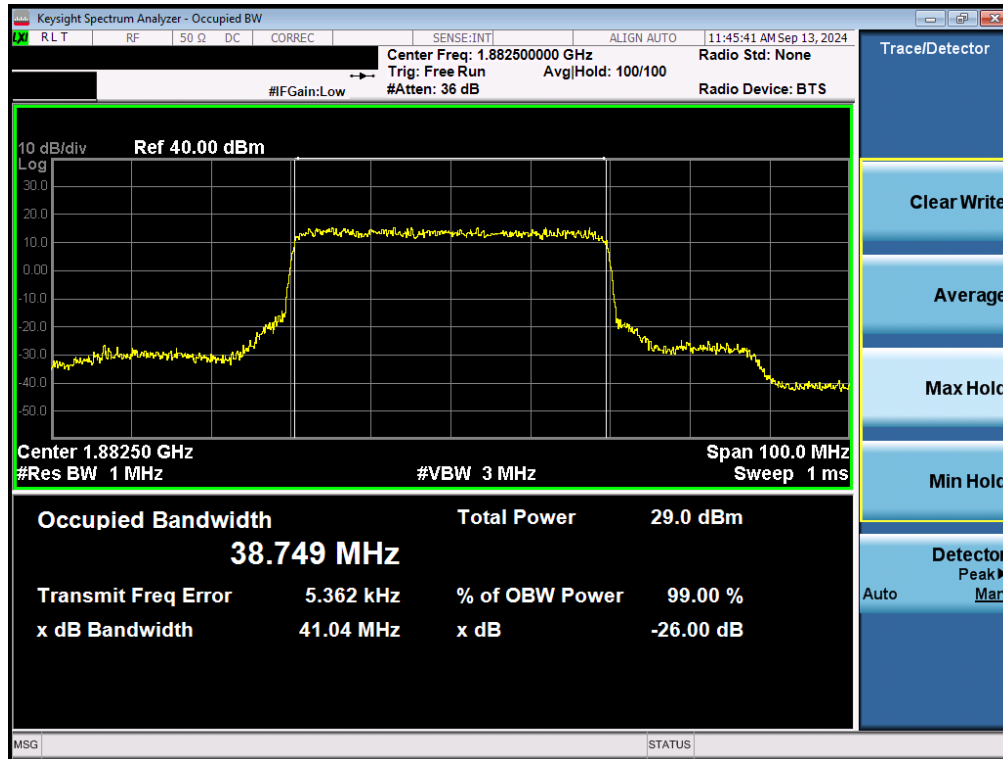


Plot 7-18. Occupied Bandwidth Plot (NR Band n25/2 - 40.0MHz CP-OFDM 16QAM - Full RB - ANT1)

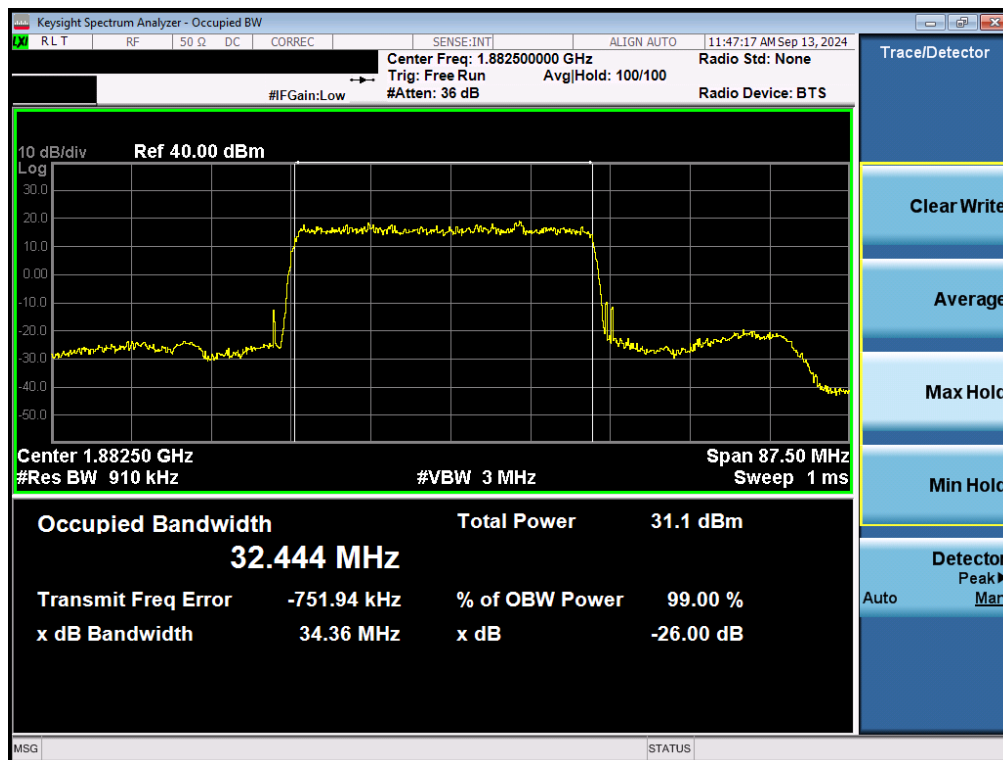


Plot 7-19. Occupied Bandwidth Plot (NR Band n25/2 - 35.0MHz DFT-s-OFDM BPSK - Full RB - ANT1)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 26 of 174

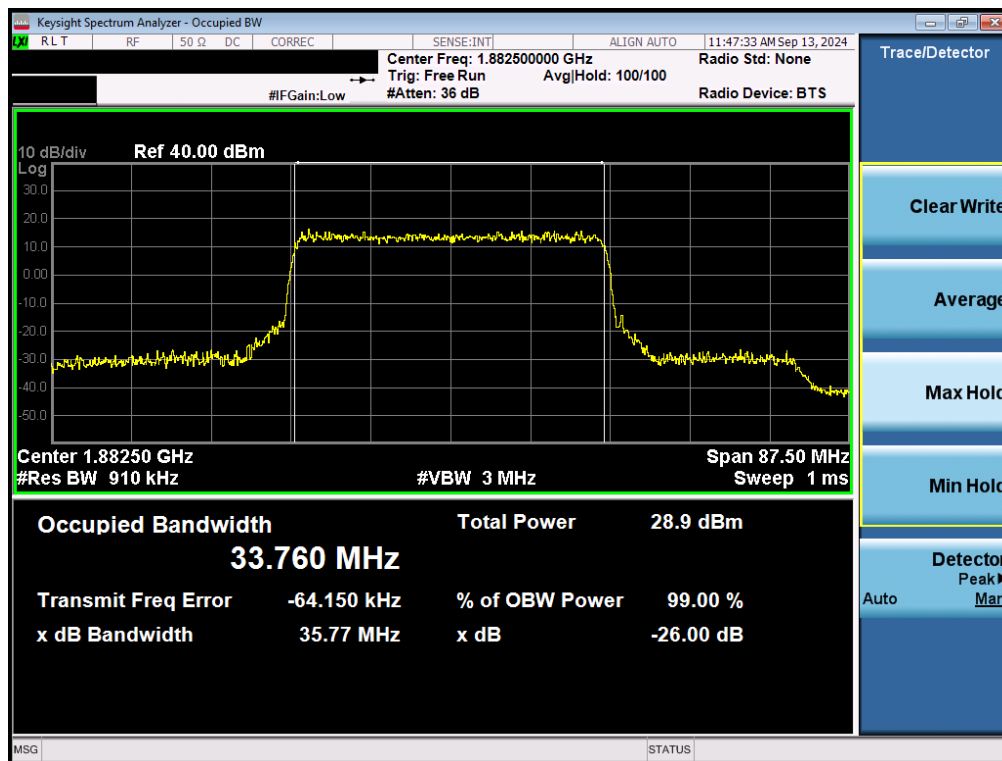


Plot 7-20. Occupied Bandwidth Plot (NR Band n25/2 - 35.0MHz CP-OFDM QPSK - Full RB - ANT1)

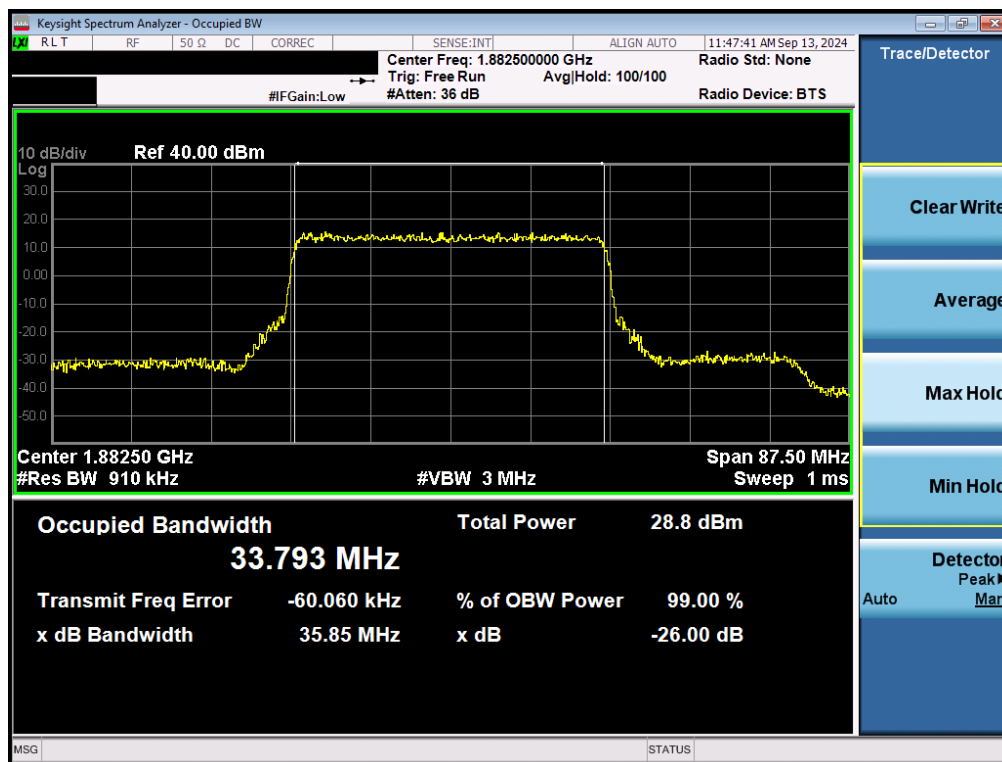


Plot 7-21. Occupied Bandwidth Plot (NR Band n25/2 - 35.0MHz CP-OFDM 16QAM - Full RB - ANT1)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 27 of 174

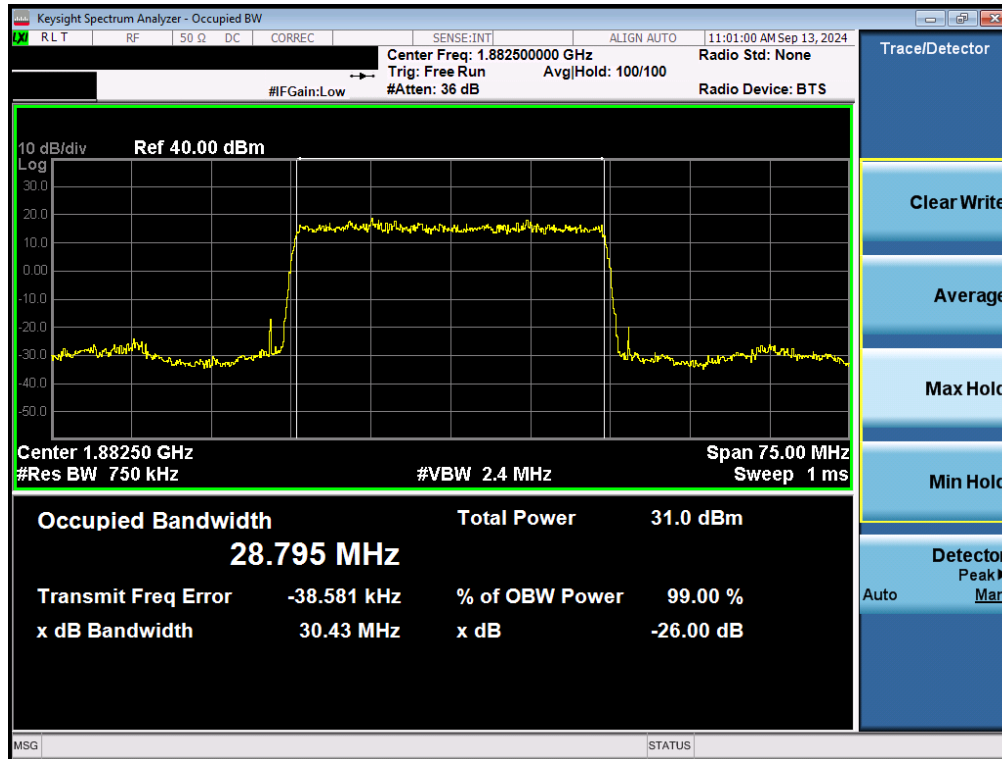


Plot 7-22. Occupied Bandwidth Plot (NR Band n25/2 - 30.0MHz DFT-s-OFDM BPSK - Full RB - ANT1)

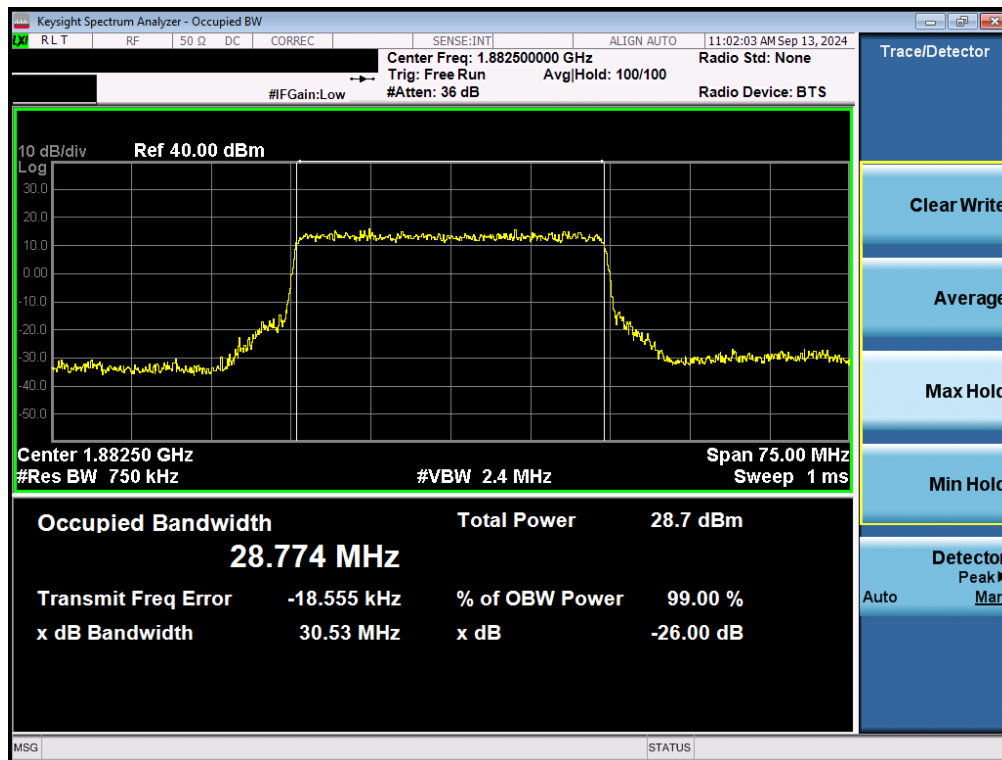


Plot 7-23. Occupied Bandwidth Plot (NR Band n25/2 - 30.0MHz CP-OFDM QPSK - Full RB - ANT1)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 28 of 174

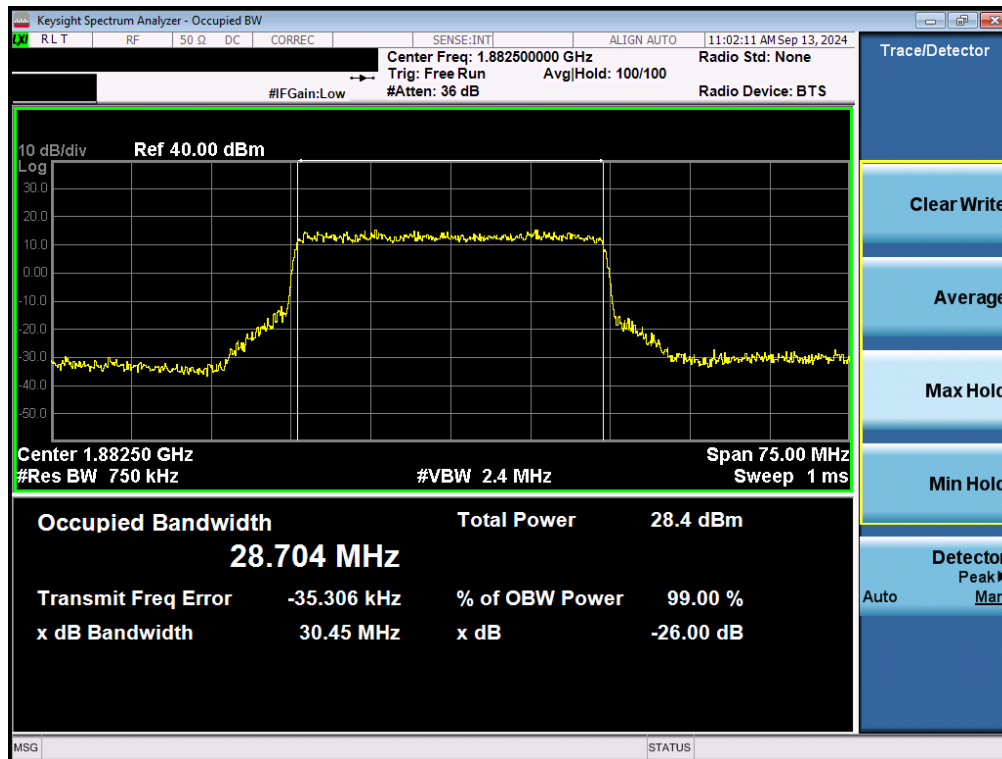


Plot 7-24. Occupied Bandwidth Plot (NR Band n25/2 - 30.0MHz CP-OFDM 16QAM - Full RB - ANT1)

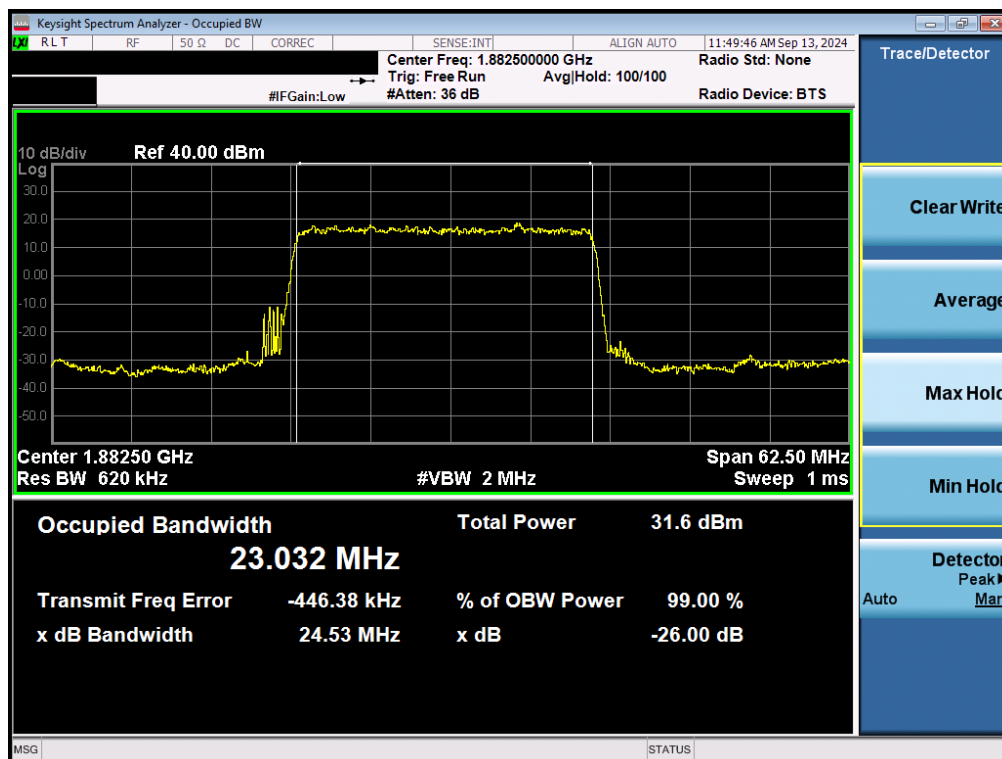


Plot 7-25. Occupied Bandwidth Plot (NR Band n25/2 - 25.0MHz DFT-s-OFDM BPSK - Full RB - ANT1)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 29 of 174

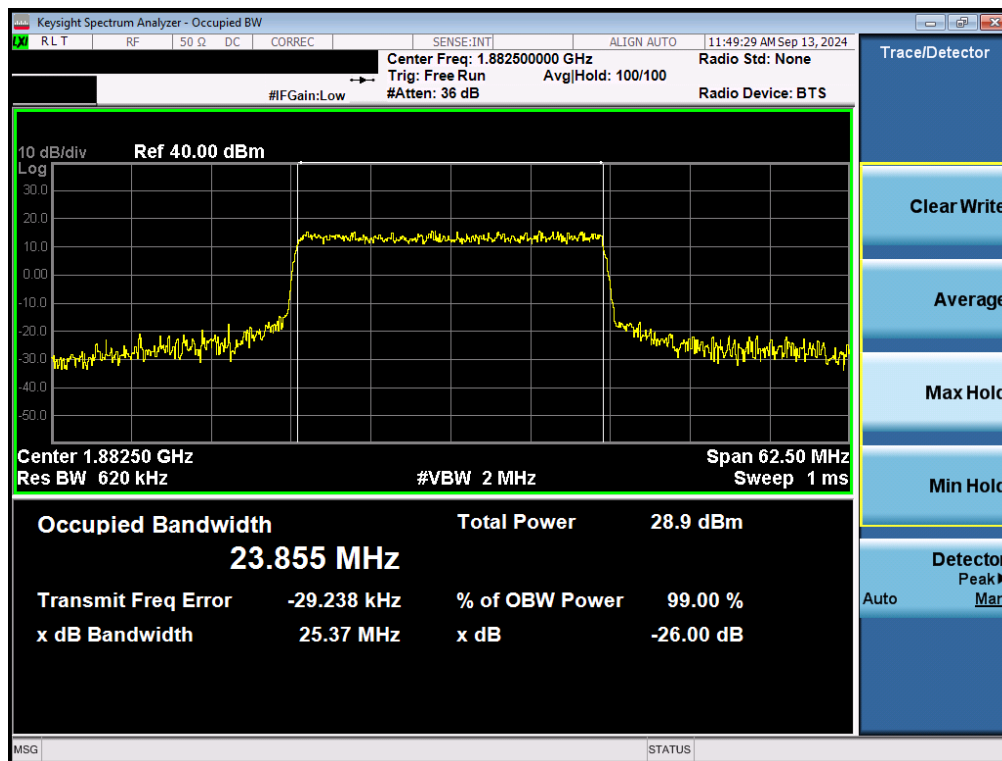


Plot 7-26. Occupied Bandwidth Plot (NR Band n25/2 - 25.0MHz CP-OFDM QPSK - Full RB - ANT1)

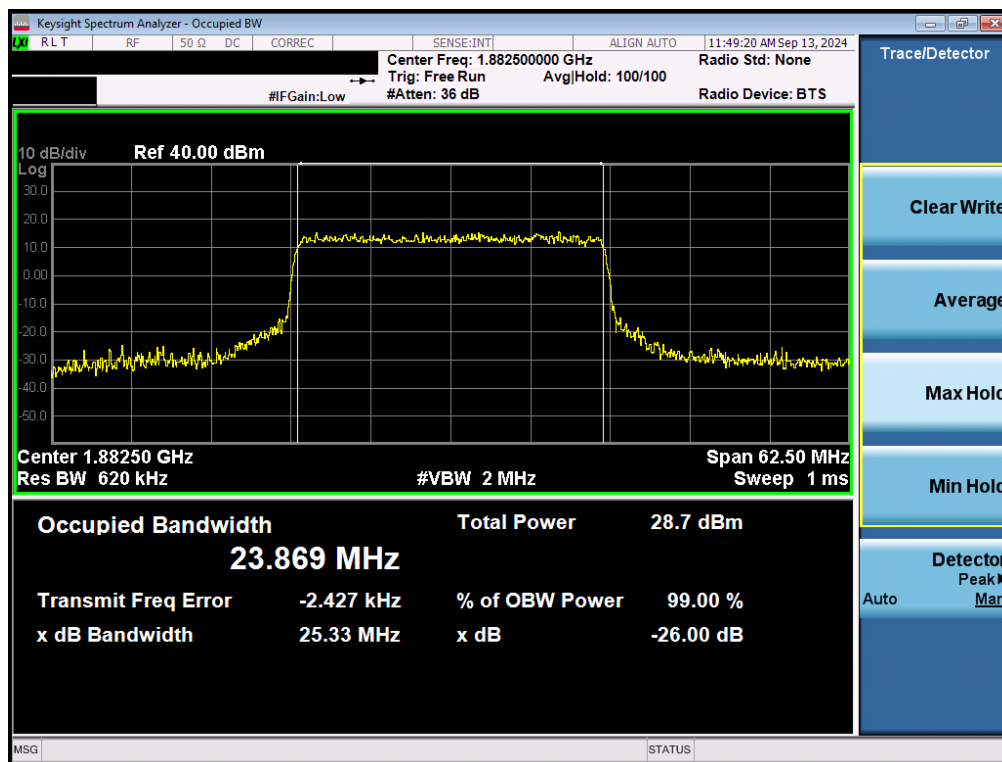


Plot 7-27. Occupied Bandwidth Plot (NR Band n25/2 - 25.0MHz CP-OFDM 16QAM - Full RB - ANT1)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 30 of 174

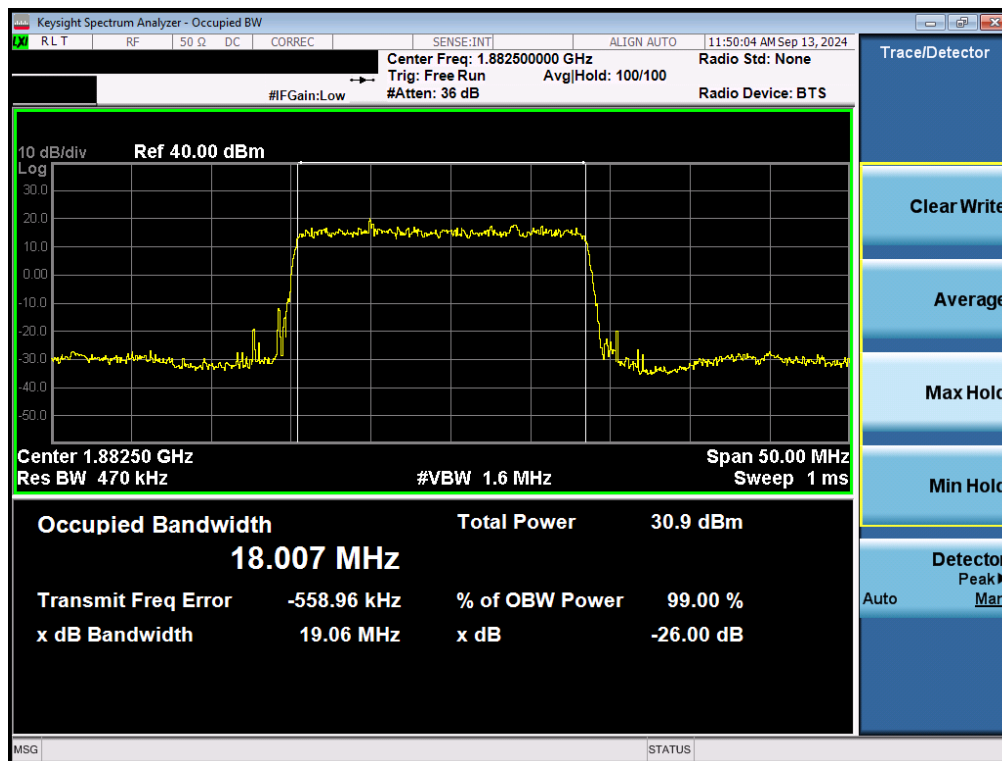


Plot 7-28. Occupied Bandwidth Plot (NR Band n25/2 - 20.0MHz DFT-s-OFDM BPSK - Full RB - ANT1)

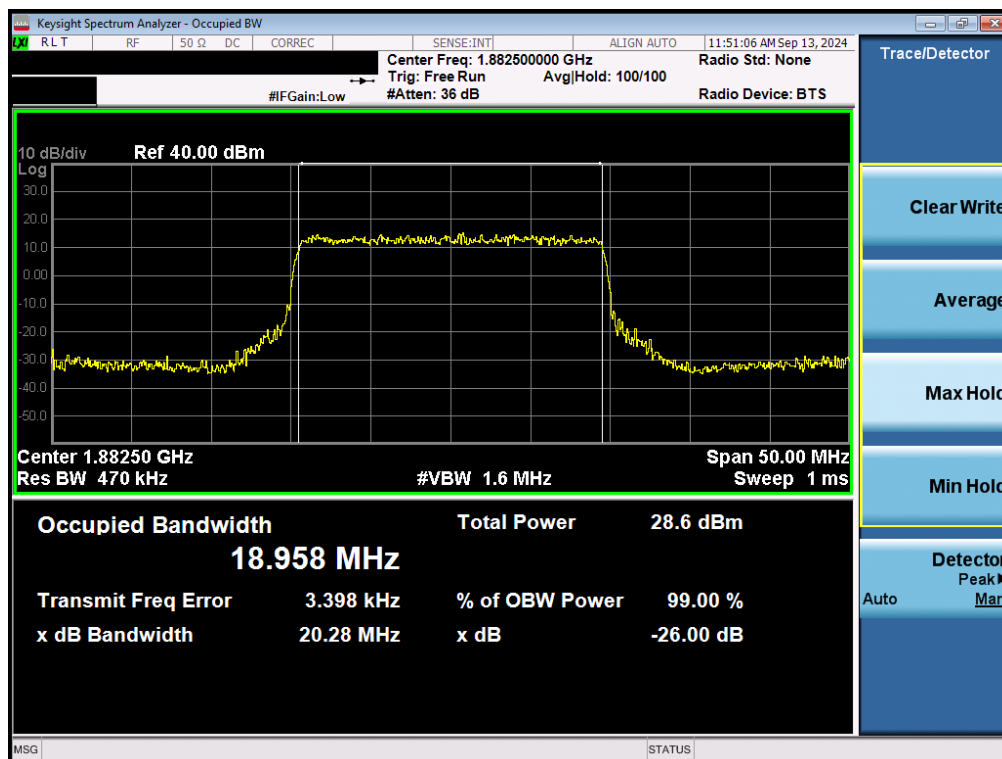


Plot 7-29. Occupied Bandwidth Plot (NR Band n25/2 - 20.0MHz CP-OFDM QPSK - Full RB - ANT1)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 31 of 174

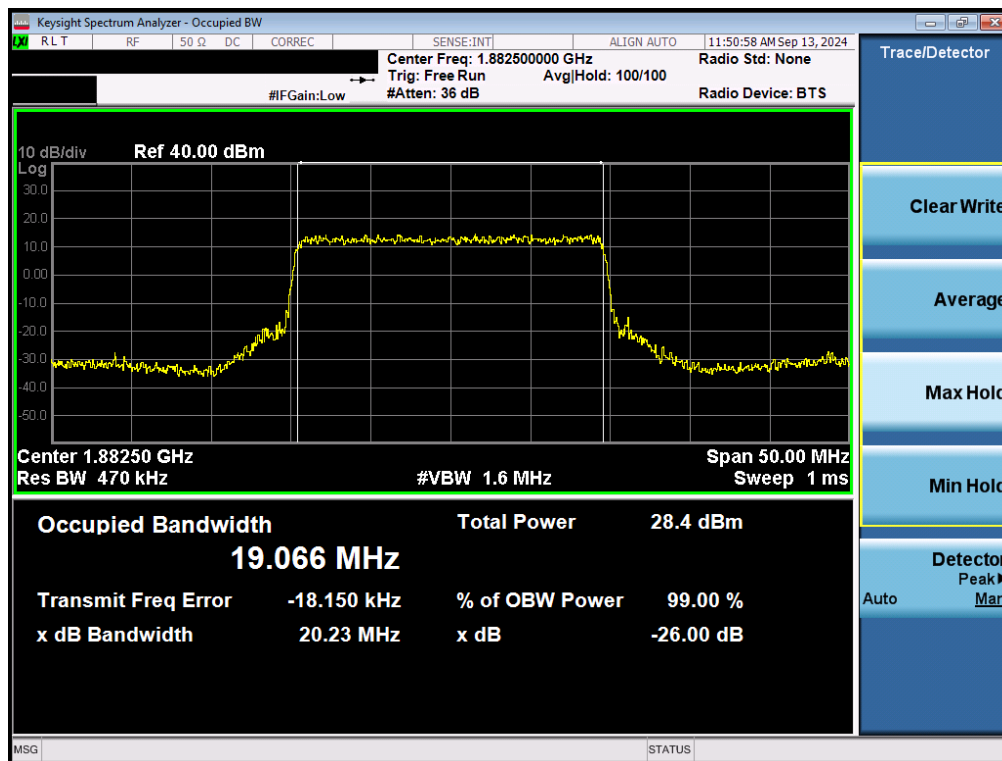


Plot 7-30. Occupied Bandwidth Plot (NR Band n25/2 - 20.0MHz CP-OFDM 16QAM - Full RB - ANT1)

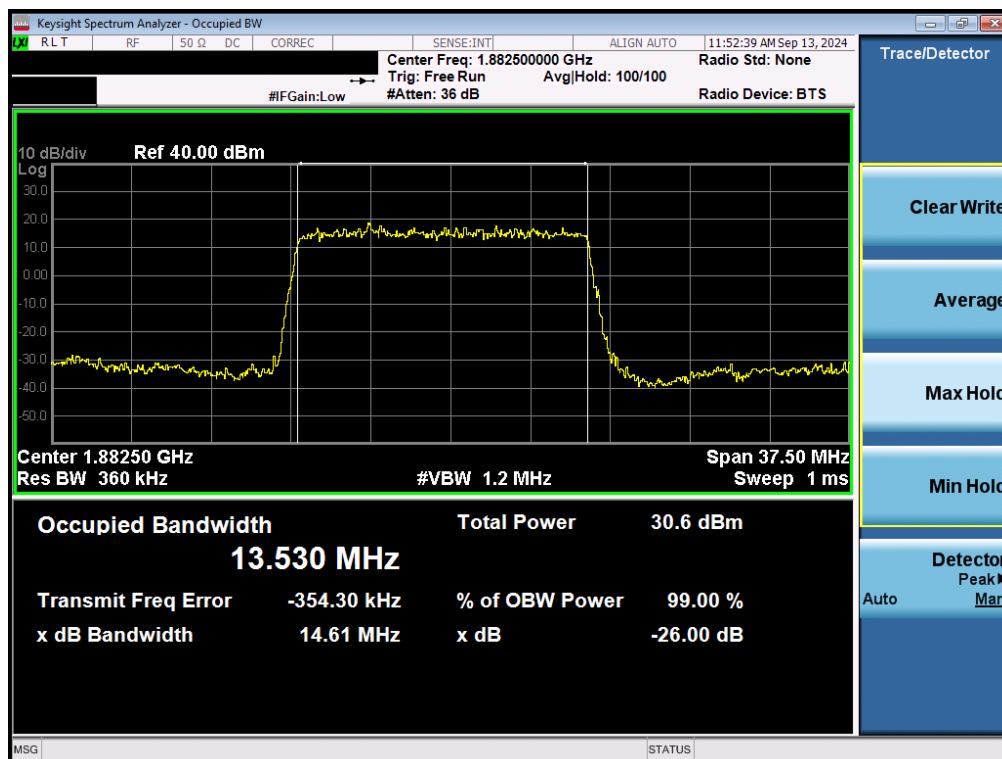


Plot 7-31. Occupied Bandwidth Plot (NR Band n25/2 - 15.0MHz DFT-s-OFDM BPSK - Full RB - ANT1)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 32 of 174

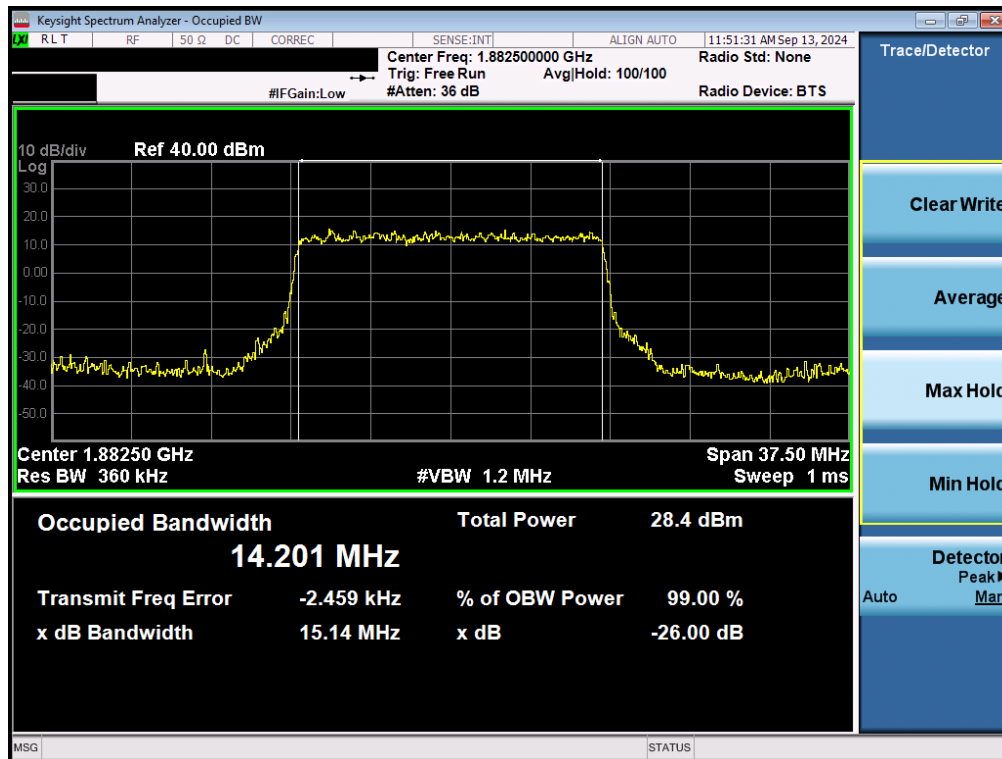


Plot 7-32. Occupied Bandwidth Plot (NR Band n25/2 - 15.0MHz CP-OFDM QPSK - Full RB - ANT1)

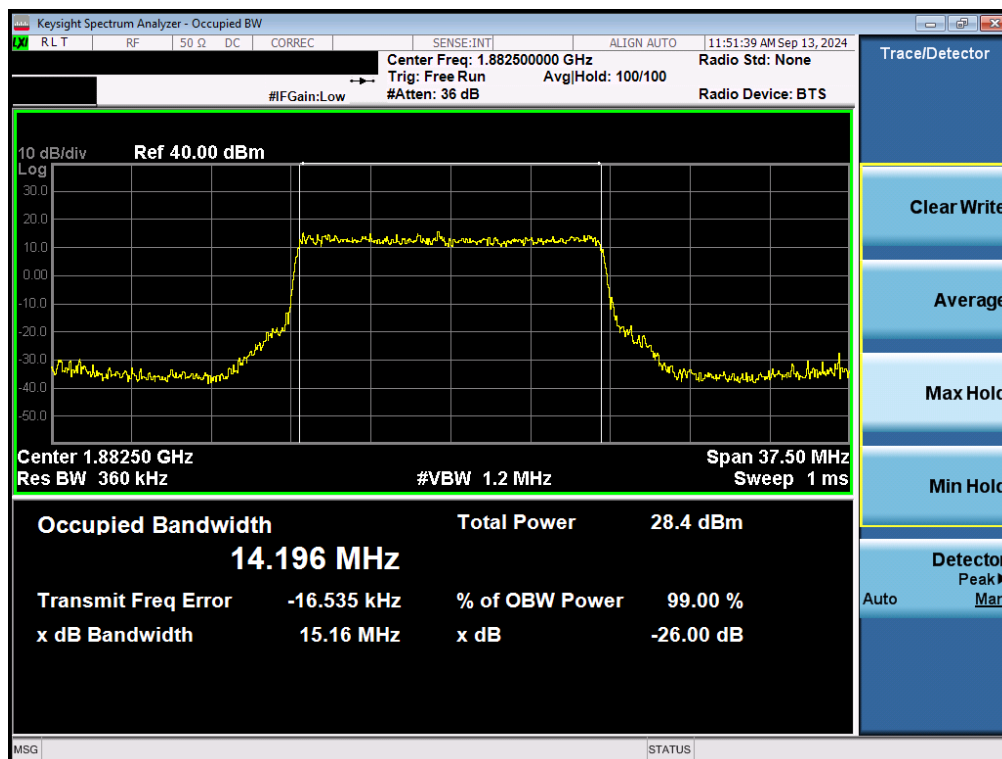


Plot 7-33. Occupied Bandwidth Plot (NR Band n25/2 - 15.0MHz CP-OFDM 16QAM - Full RB - ANT1)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 33 of 174

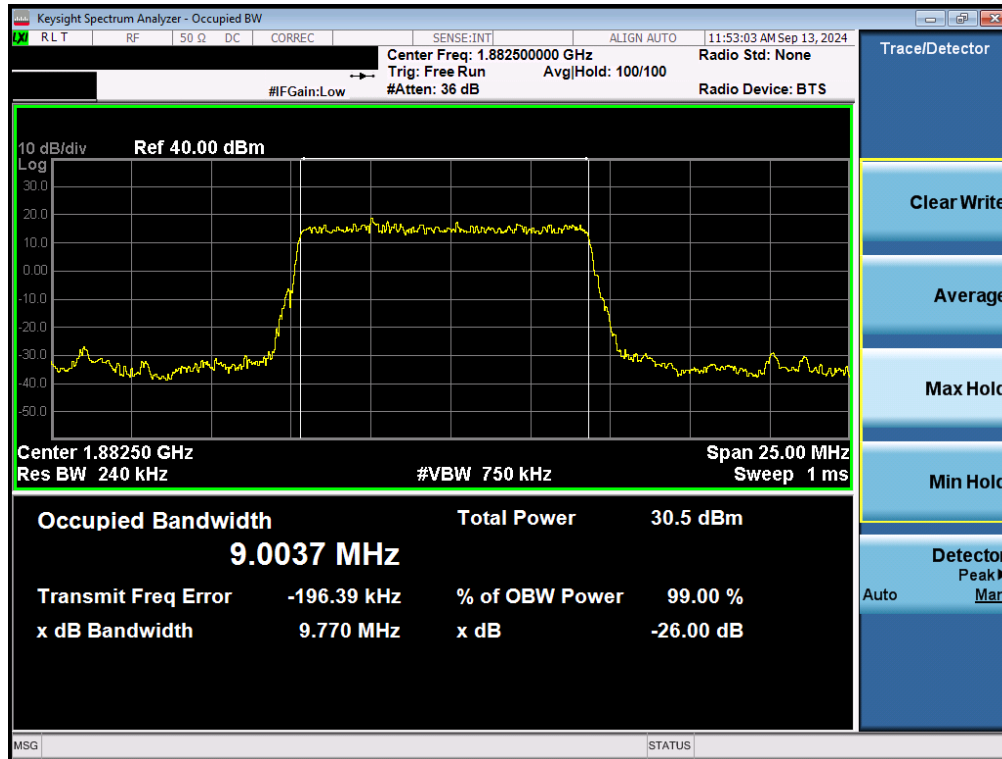


Plot 7-34. Occupied Bandwidth Plot (NR Band n25/2 - 10.0MHz DFT-s-OFDM BPSK - Full RB - ANT1)

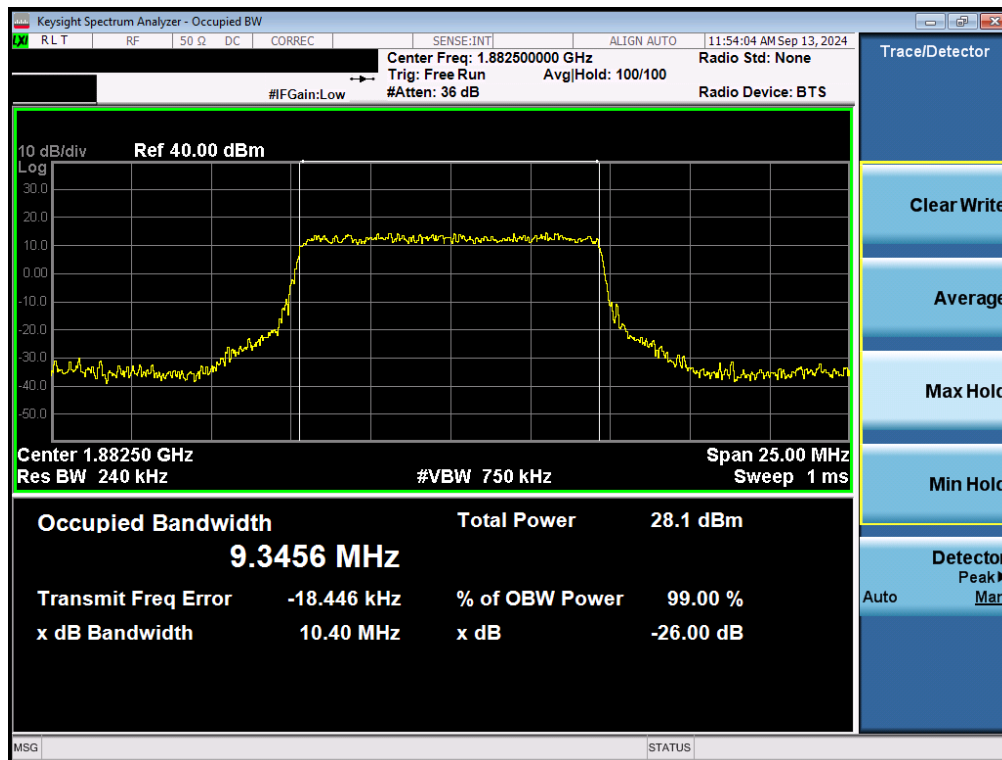


Plot 7-35. Occupied Bandwidth Plot (NR Band n25/2 - 10.0MHz CP-OFDM QPSK - Full RB - ANT1)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 34 of 174

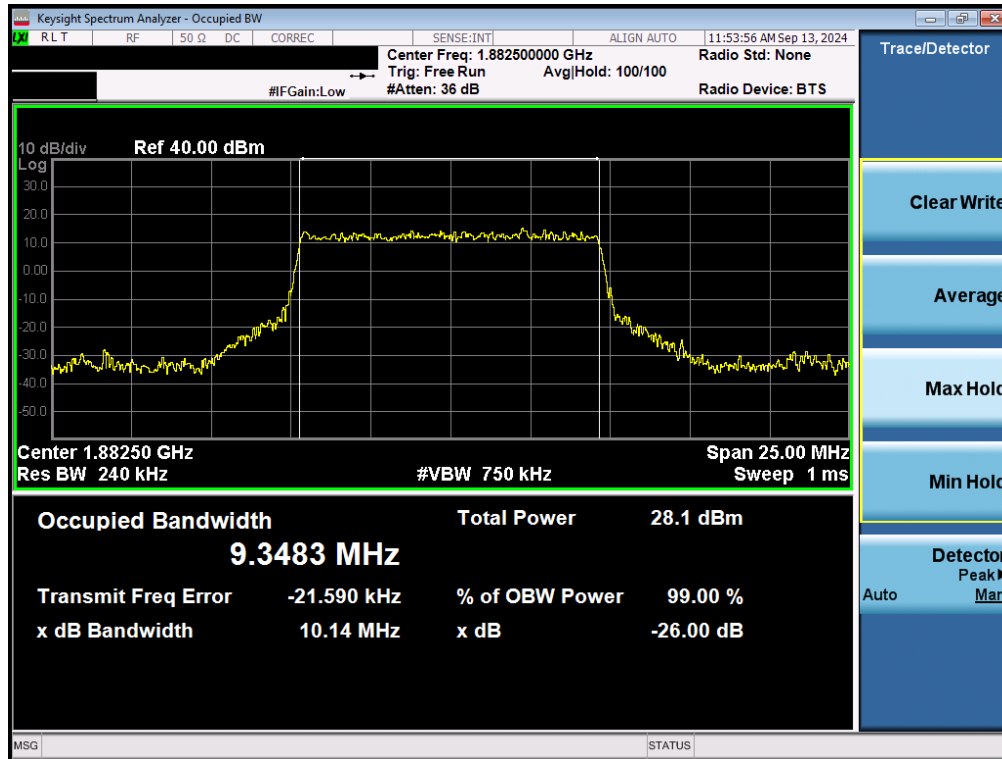


Plot 7-36. Occupied Bandwidth Plot (NR Band n25/2 - 10.0MHz CP-OFDM 16QAM - Full RB - ANT1)

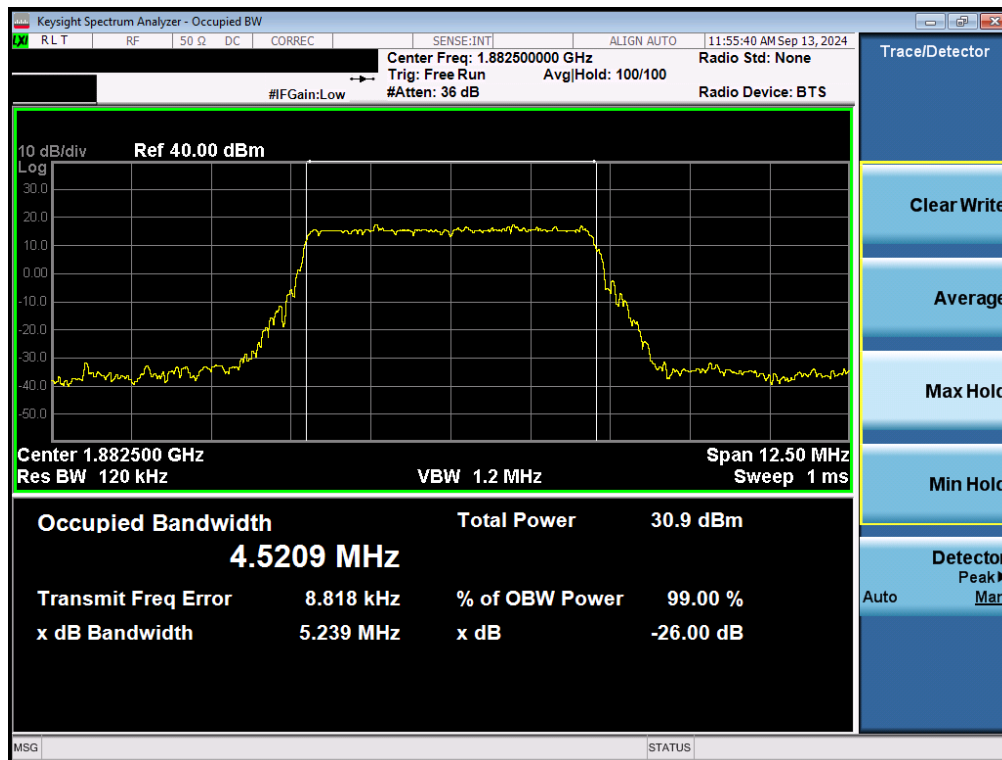


Plot 7-37. Occupied Bandwidth Plot (NR Band n25/2 - 5.0MHz DFT-s-OFDM BPSK - Full RB - ANT1)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 35 of 174

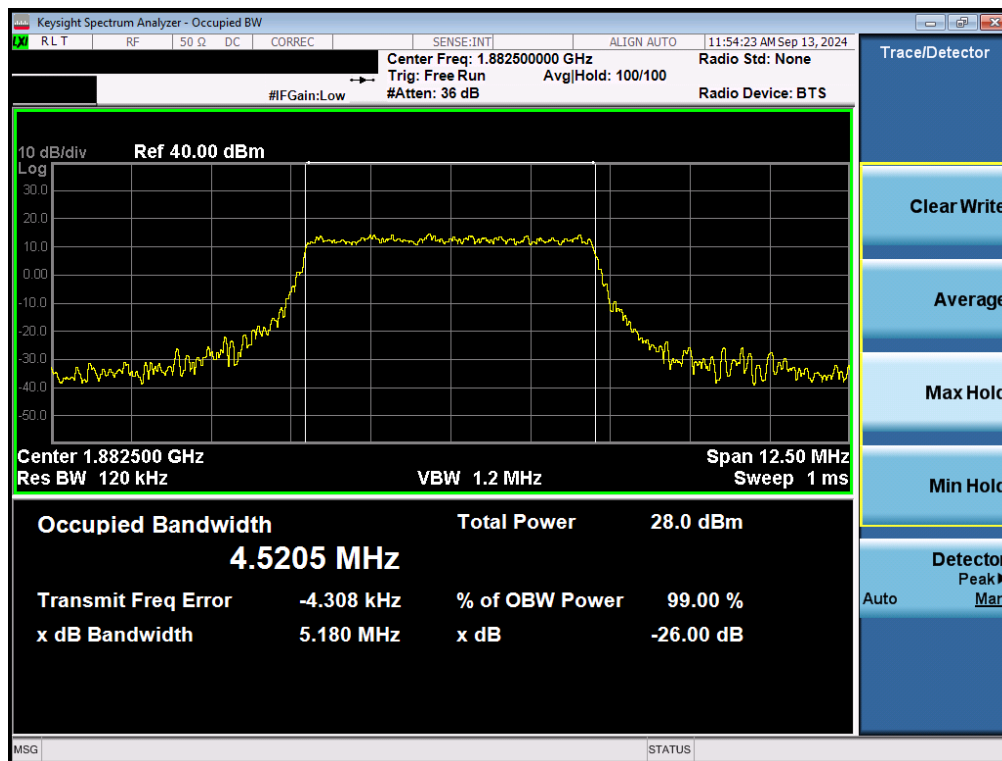

Plot 7-38. Occupied Bandwidth Plot (NR Band n25/2 - 5.0MHz CP-OFDM QPSK - Full RB - ANT1)

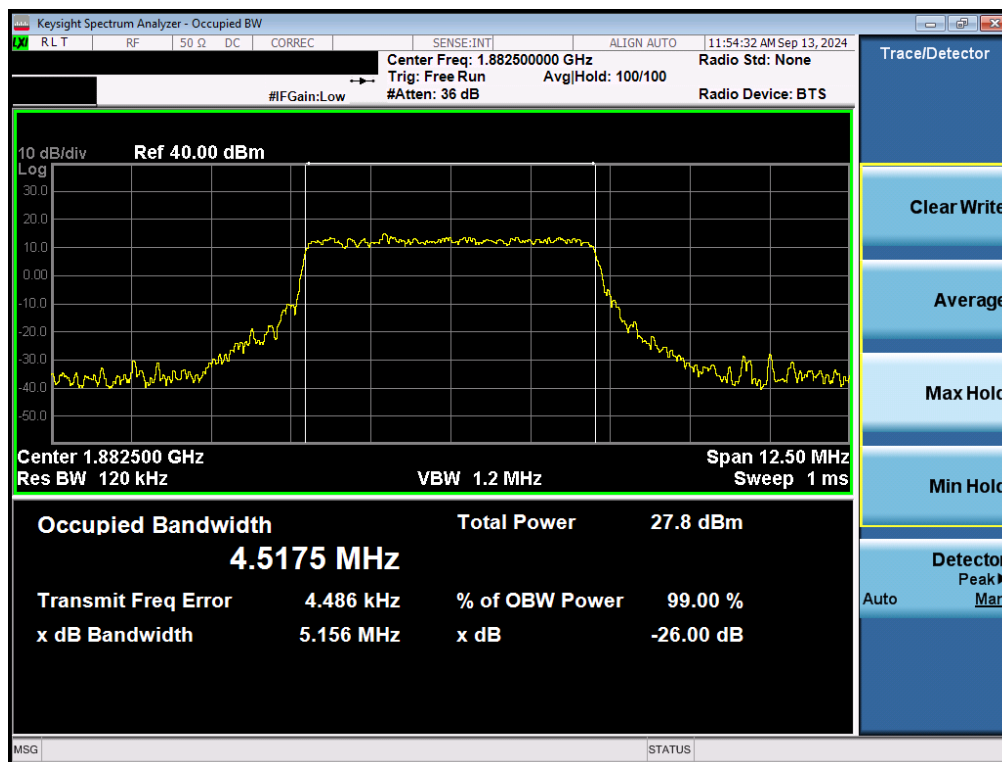

Plot 7-39. Occupied Bandwidth Plot (NR Band n25/2 - 5.0MHz CP-OFDM 16QAM - Full RB - ANT1)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 36 of 174

Mode	Bandwidth	Modulation	OBW [MHz]
LTE-B25-2	20MHz	QPSK	17.98
		16QAM	17.98
	15MHz	QPSK	13.55
		16QAM	13.48
	10MHz	QPSK	9.00
		16QAM	9.00
	5MHz	QPSK	4.52
		16QAM	4.51
	3MHz	QPSK	2.71
		16QAM	2.72
	1.4MHz	QPSK	1.09
		16QAM	1.10


Table 7-6. Occupied Bandwidth Test Results – Ant2

Mode	Bandwidth	Modulation	OBW [MHz]
NR-n25-2	40MHz	BPSK	38.76
		QPSK	38.87
		16QAM	38.80
	35MHz	BPSK	32.40
		QPSK	33.78
		16QAM	33.84
	30MHz	BPSK	28.89
		QPSK	28.80
		16QAM	28.75
	25MHz	BPSK	23.09
		QPSK	23.91
		16QAM	23.93
	20MHz	BPSK	18.01
		QPSK	19.00
		16QAM	19.09
	15MHz	BPSK	13.53
		QPSK	14.18
		16QAM	14.16
	10MHz	BPSK	9.02
		QPSK	9.36
		16QAM	9.34
	5MHz	BPSK	4.49
		QPSK	4.50
		16QAM	4.51


Table 7-7. Occupied Bandwidth Test Results – Ant2

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 37 of 174

LTE Band 25/2 – Ant2

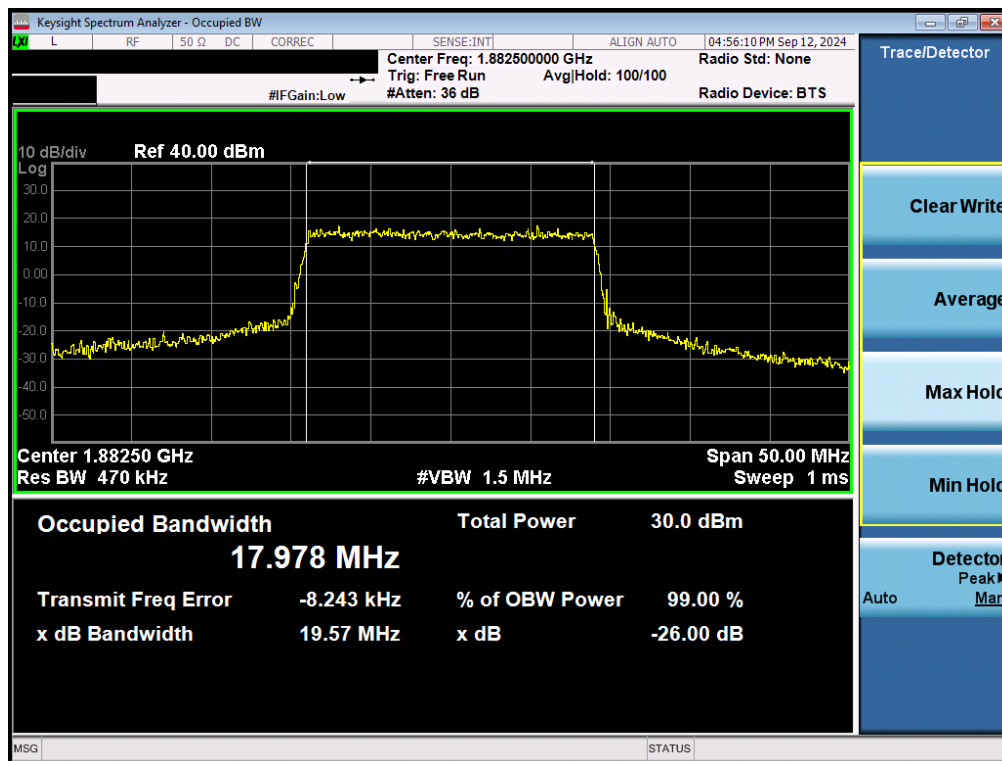


Plot 7-40. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz QPSK - Full RB - Ant2)

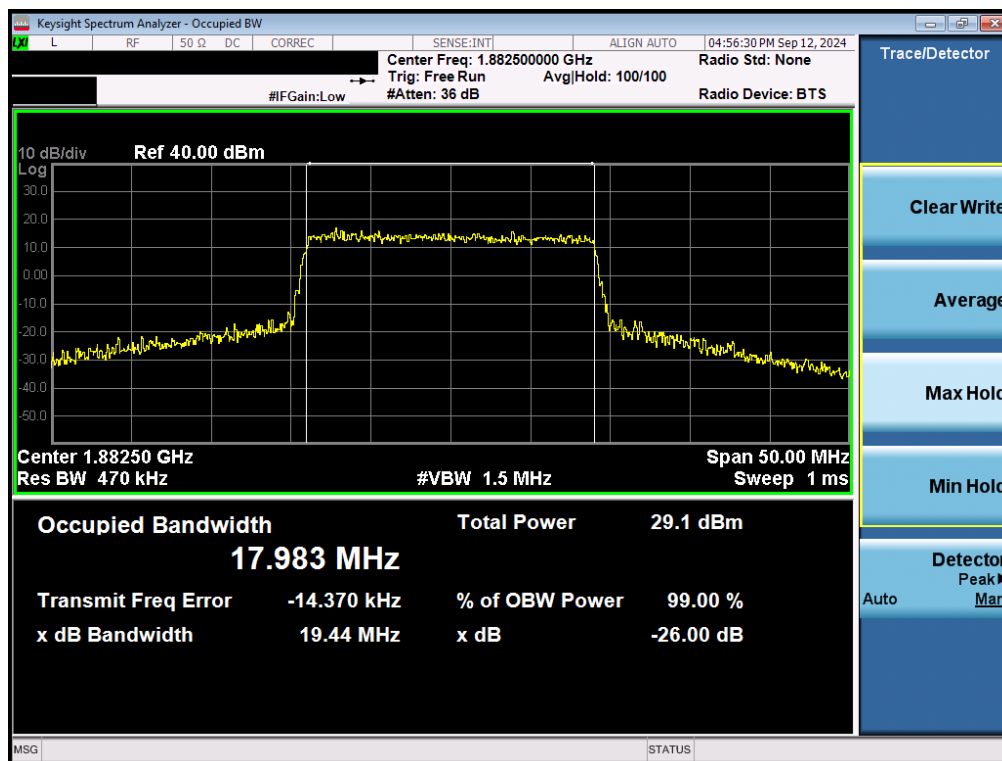


Plot 7-41. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz 16-QAM - Full RB - Ant2)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 38 of 174

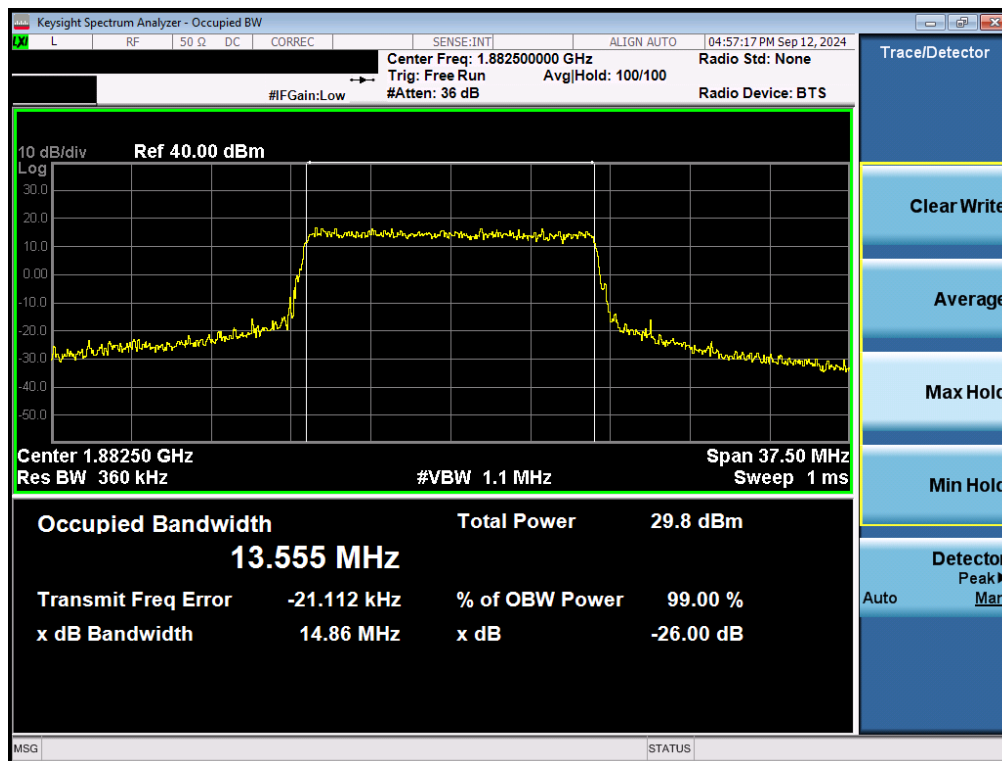


Plot 7-42. Occupied Bandwidth Plot (LTE Band 25/2 - 15MHz QPSK - Full RB - Ant2)

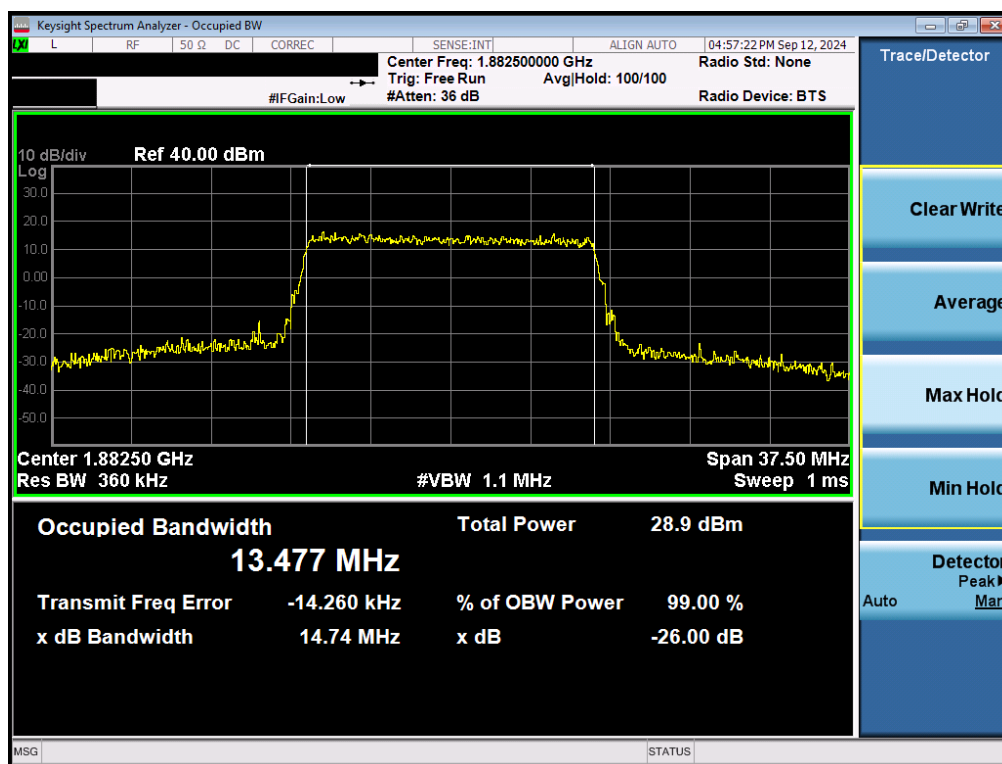


Plot 7-43. Occupied Bandwidth Plot (LTE Band 25/2 - 15MHz 16-QAM - Full RB - Ant2)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 39 of 174

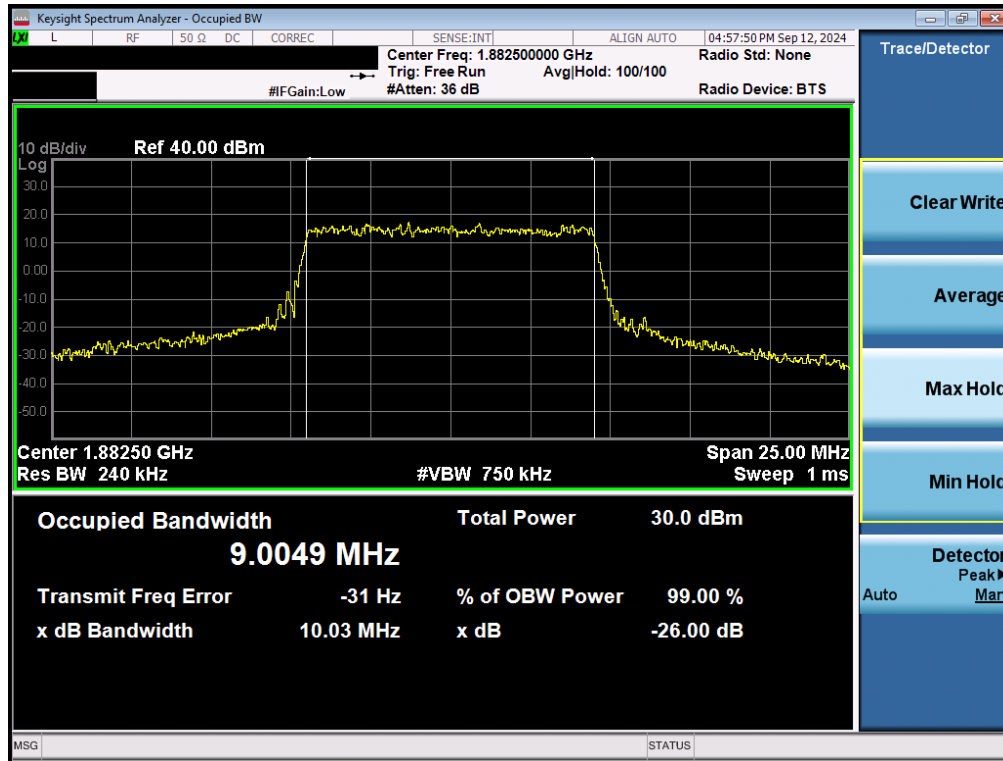


Plot 7-44. Occupied Bandwidth Plot (LTE Band 25/2 - 10MHz QPSK - Full RB - Ant2)

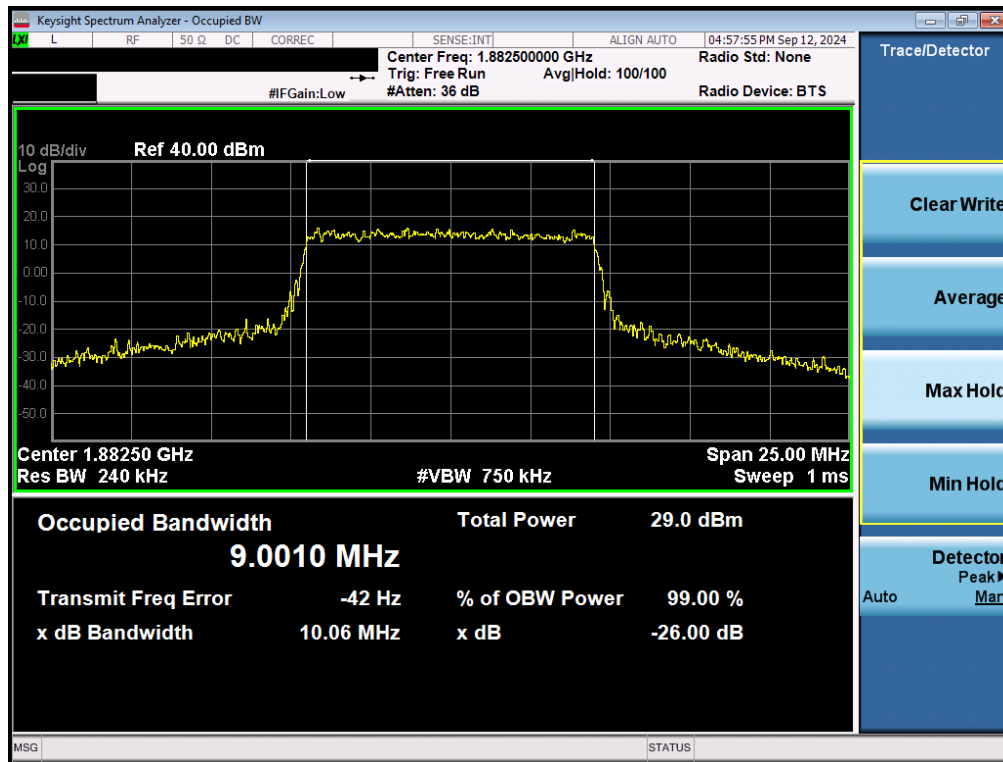


Plot 7-45. Occupied Bandwidth Plot (LTE Band 25/2 - 10MHz 16-QAM - Full RB - Ant2)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 40 of 174

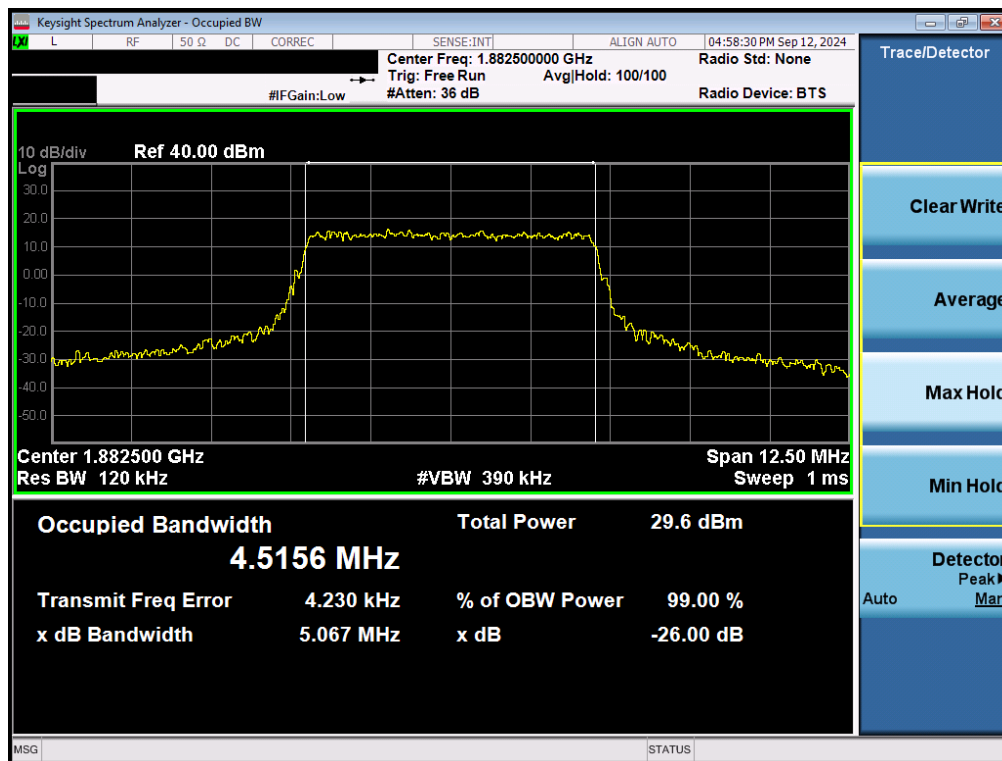


Plot 7-46. Occupied Bandwidth Plot (LTE Band 25/2 - 5MHz QPSK - Full RB - Ant2)

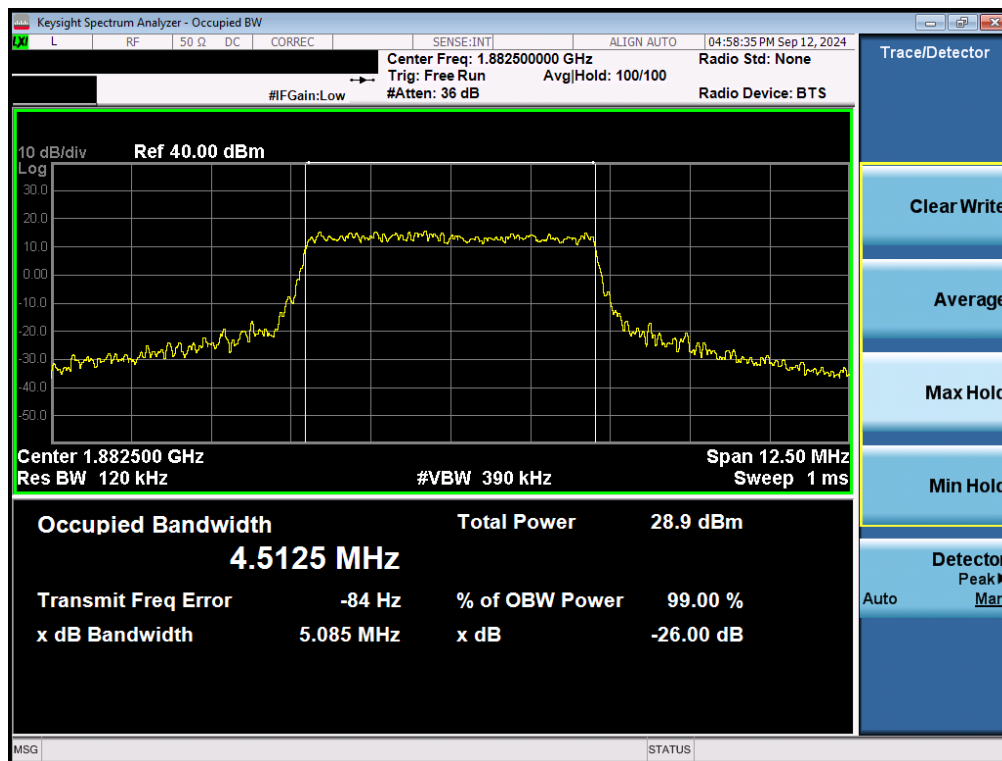


Plot 7-47. Occupied Bandwidth Plot (LTE Band 25/2 - 5MHz 16-QAM - Full RB - Ant2)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 41 of 174

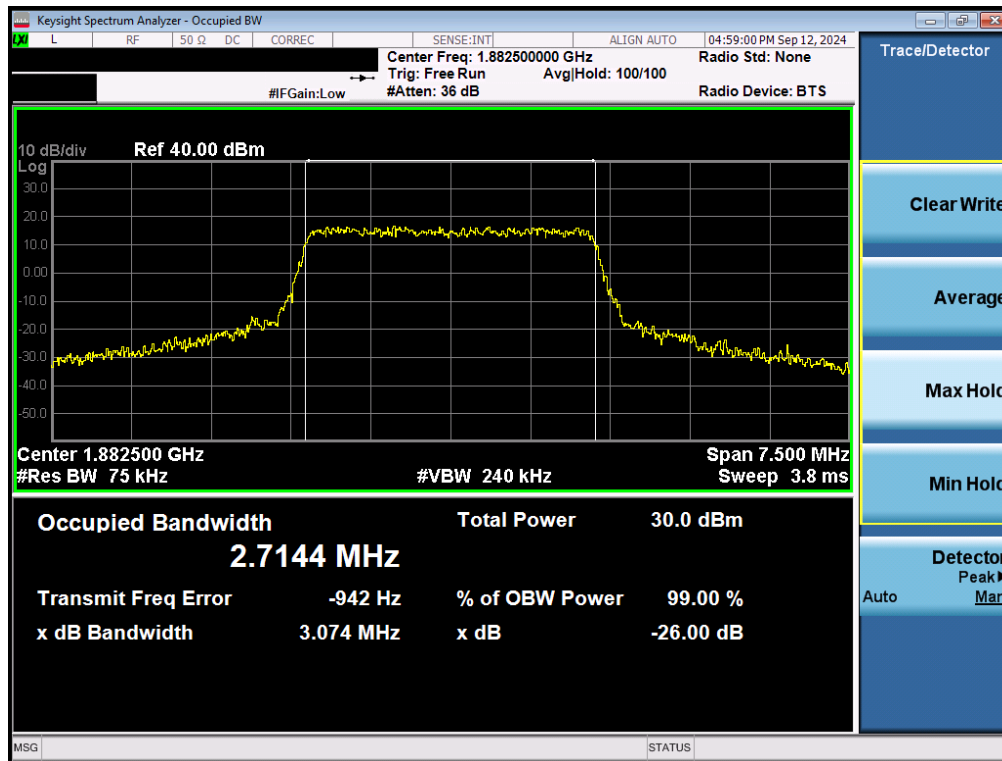


Plot 7-48. Occupied Bandwidth Plot (LTE Band 25/2 - 3MHz QPSK - Full RB - Ant2)

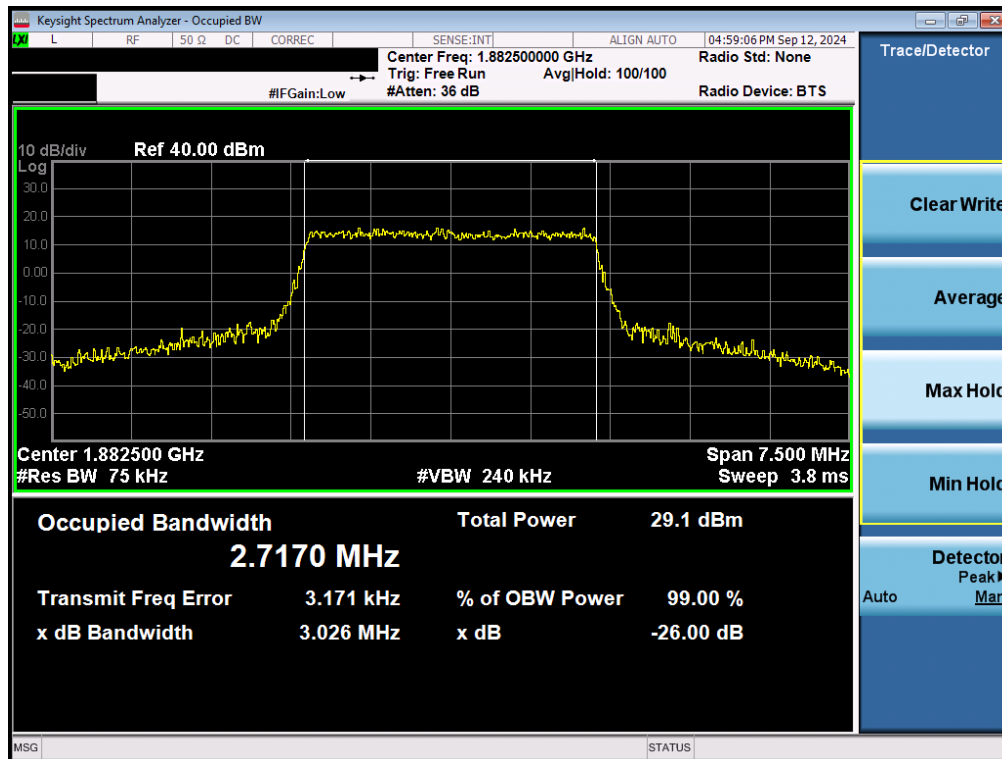


Plot 7-49. Occupied Bandwidth Plot (LTE Band 25/2 - 3MHz 16-QAM - Full RB - Ant2)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 42 of 174

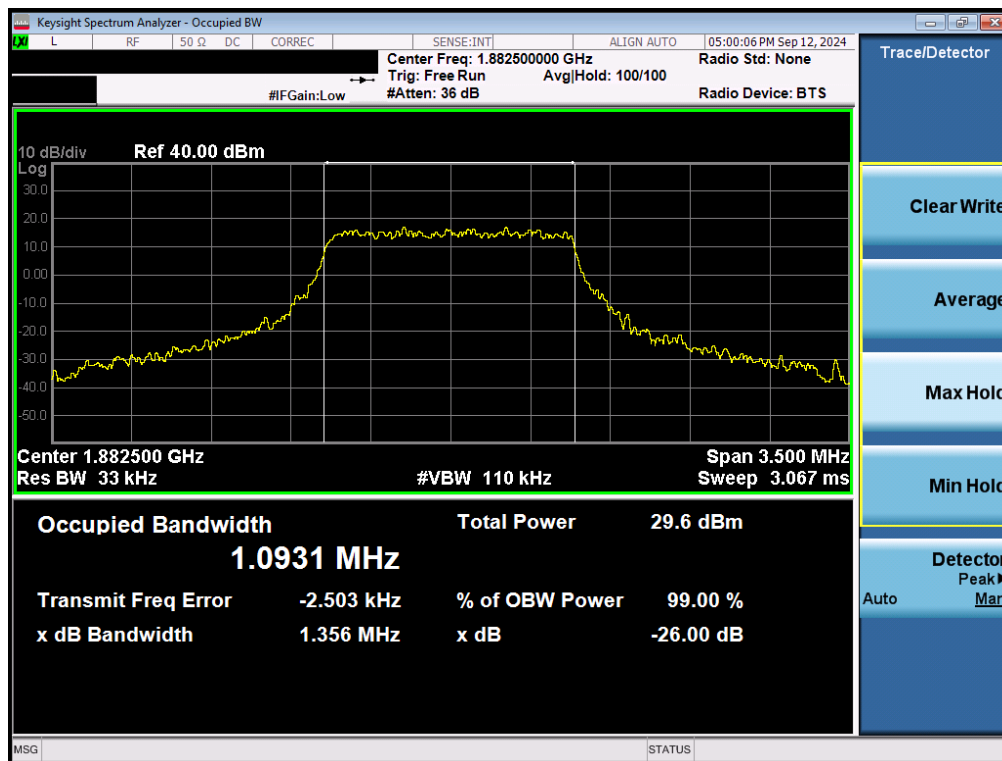


Plot 7-50. Occupied Bandwidth Plot (LTE Band 25/2 - 1.4MHz QPSK - Full RB - Ant2)

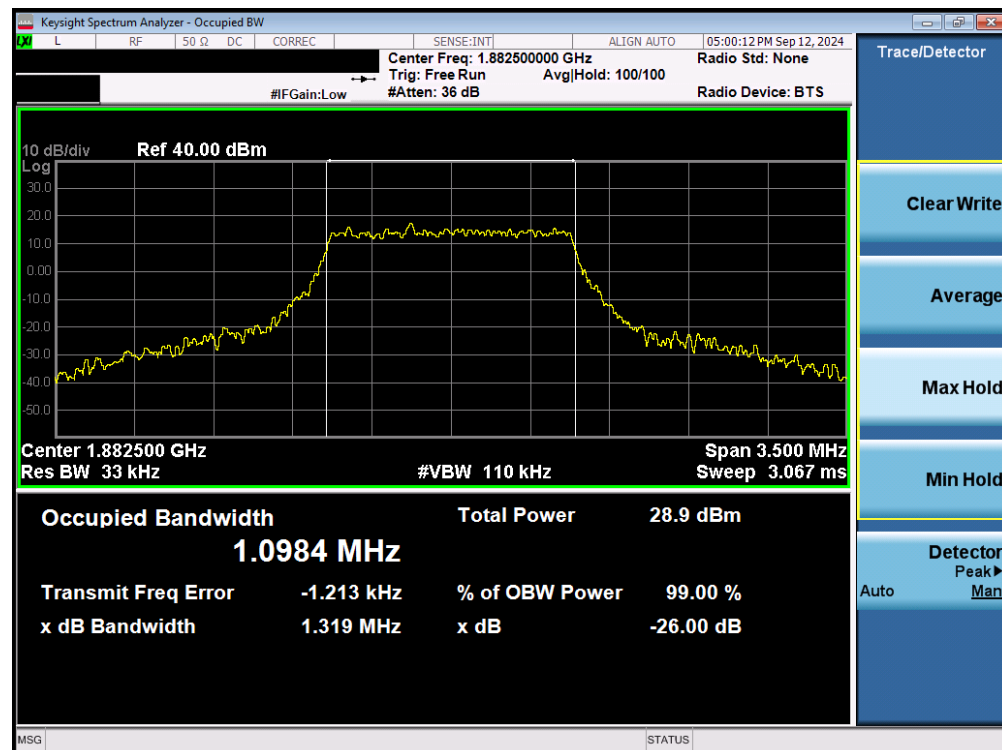


Plot 7-51. Occupied Bandwidth Plot (LTE Band 25/2 - 1.4MHz 16-QAM - Full RB - Ant2)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 43 of 174

NR Band n25/2 – Ant2

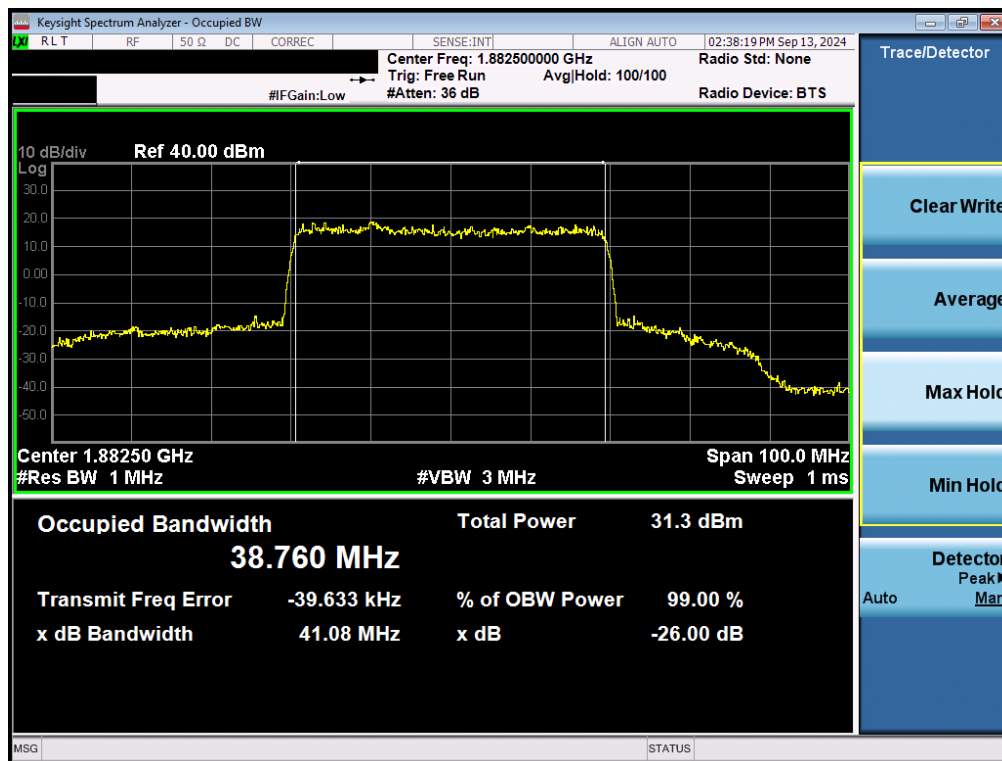


Plot 7-52. Occupied Bandwidth Plot (NR Band n25/2 - 40.0MHz DFT-s-OFDM BPSK - Full RB - ANT2)

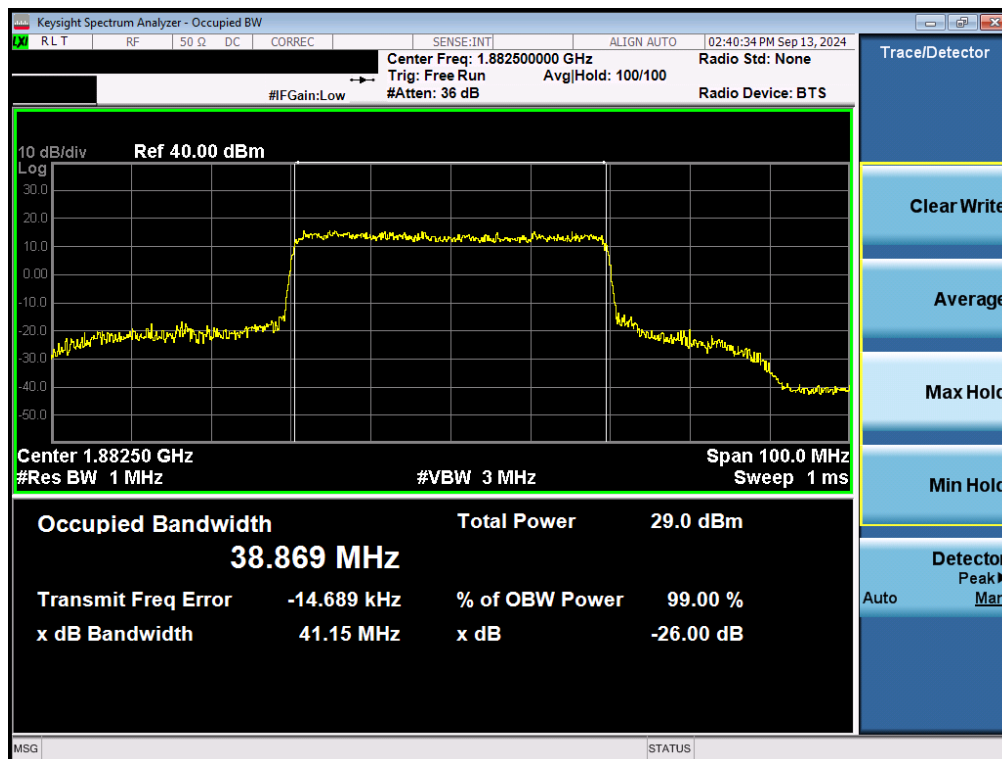

Plot 7-53. Occupied Bandwidth Plot (NR Band n25/2 - 40.0MHz CP-OFDM QPSK - Full RB - ANT2)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 44 of 174

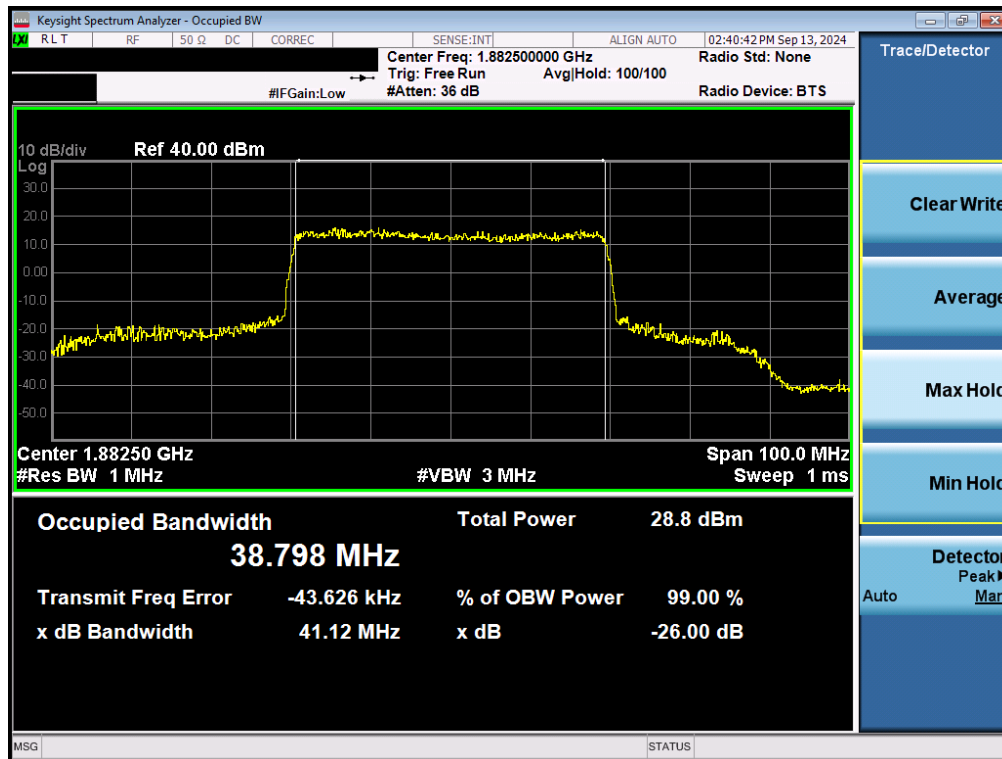


Plot 7-54. Occupied Bandwidth Plot (NR Band n25/2 - 40.0MHz CP-OFDM 16QAM - Full RB - ANT2)




Plot 7-55. Occupied Bandwidth Plot (NR Band n25/2 - 35.0MHz DFT-s-OFDM BPSK - Full RB - ANT2)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 45 of 174

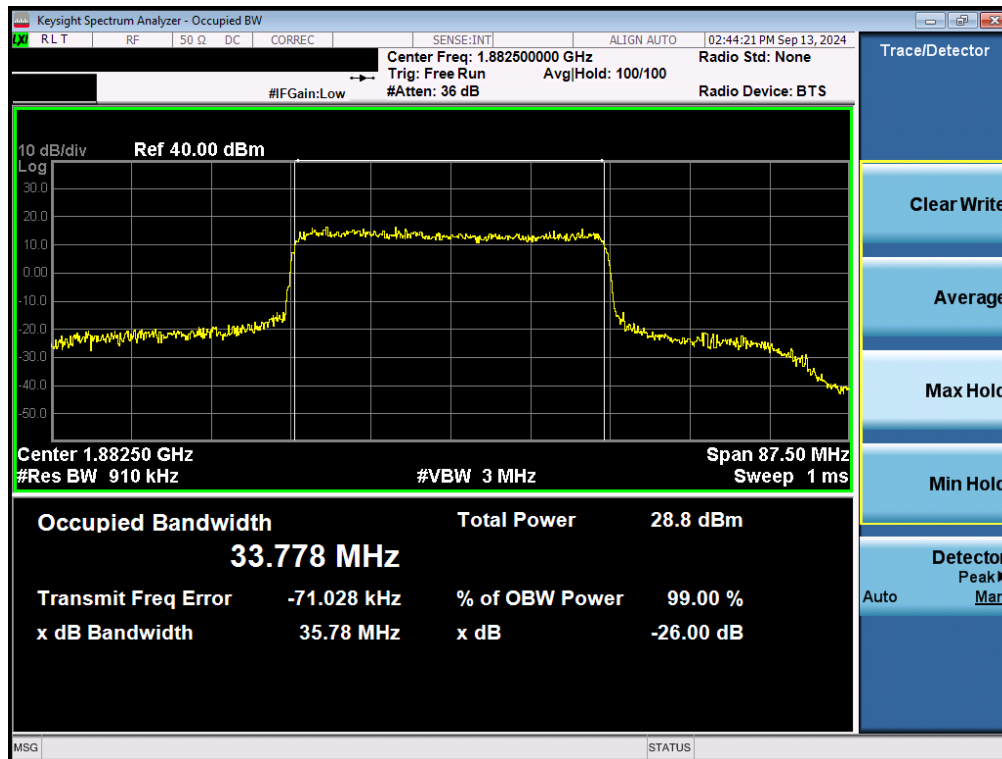


Plot 7-56. Occupied Bandwidth Plot (NR Band n25/2 - 35.0MHz CP-OFDM QPSK - Full RB - ANT2)

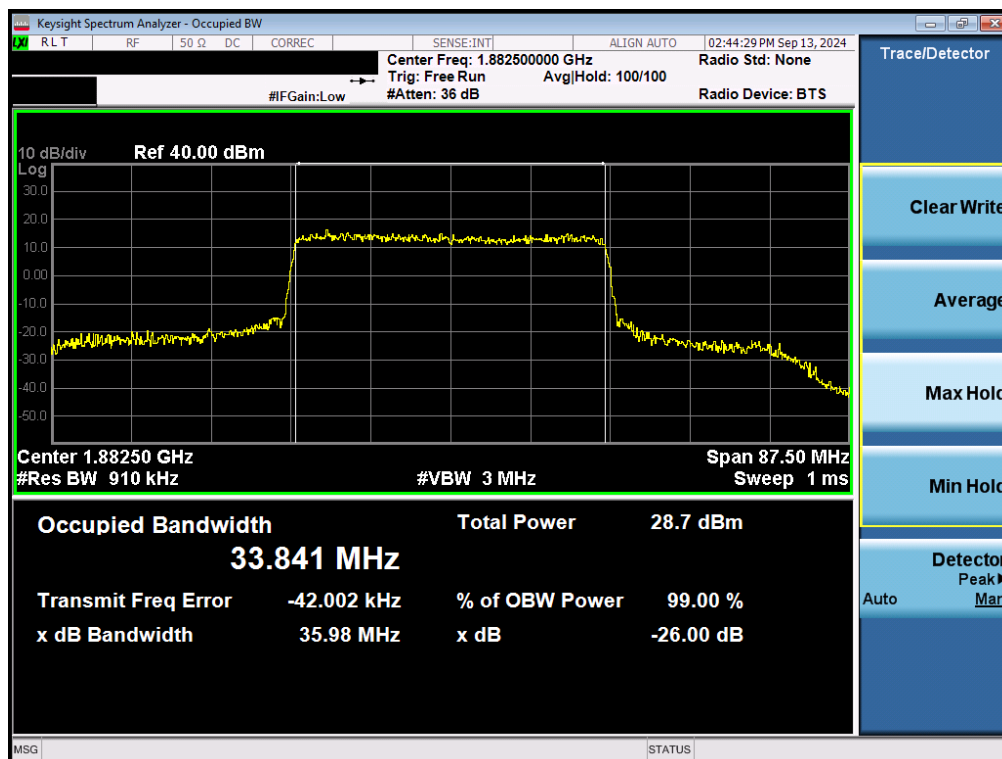


Plot 7-57. Occupied Bandwidth Plot (NR Band n25/2 - 35.0MHz CP-OFDM 16QAM - Full RB - ANT2)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 46 of 174

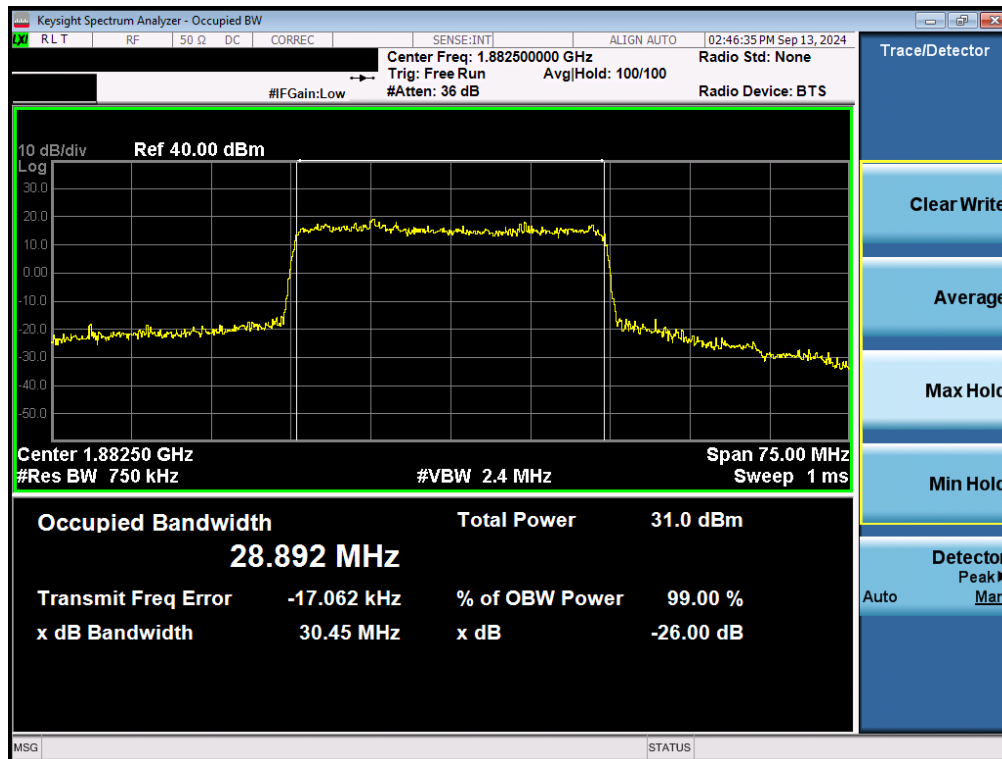


Plot 7-58. Occupied Bandwidth Plot (NR Band n25/2 - 30.0MHz DFT-s-OFDM BPSK - Full RB - ANT2)

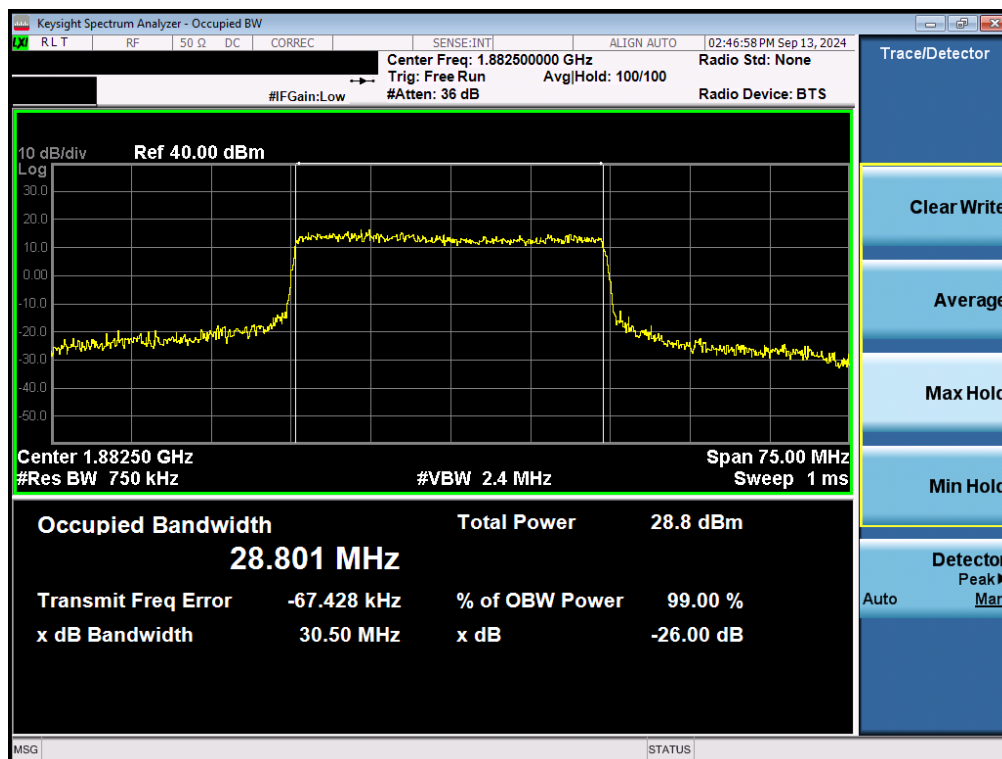


Plot 7-59. Occupied Bandwidth Plot (NR Band n25/2 - 30.0MHz CP-OFDM QPSK - Full RB - ANT2)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 47 of 174

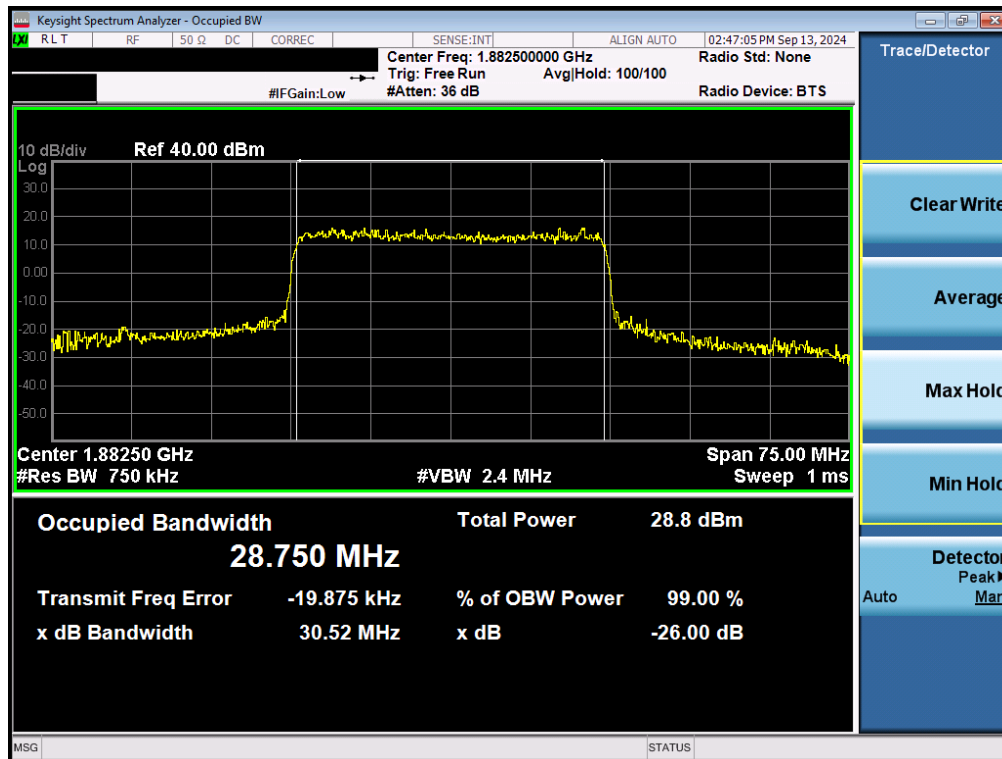


Plot 7-60. Occupied Bandwidth Plot (NR Band n25/2 - 30.0MHz CP-OFDM 16QAM - Full RB - ANT2)

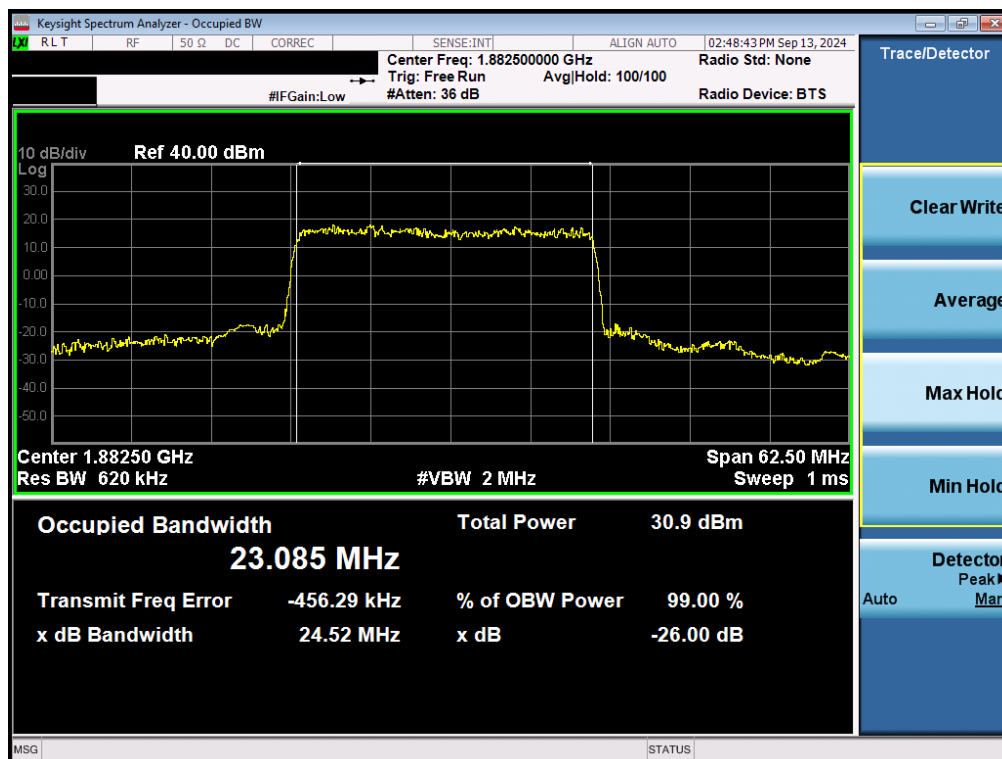


Plot 7-61. Occupied Bandwidth Plot (NR Band n25/2 - 25.0MHz DFT-s-OFDM BPSK - Full RB - ANT2)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 48 of 174

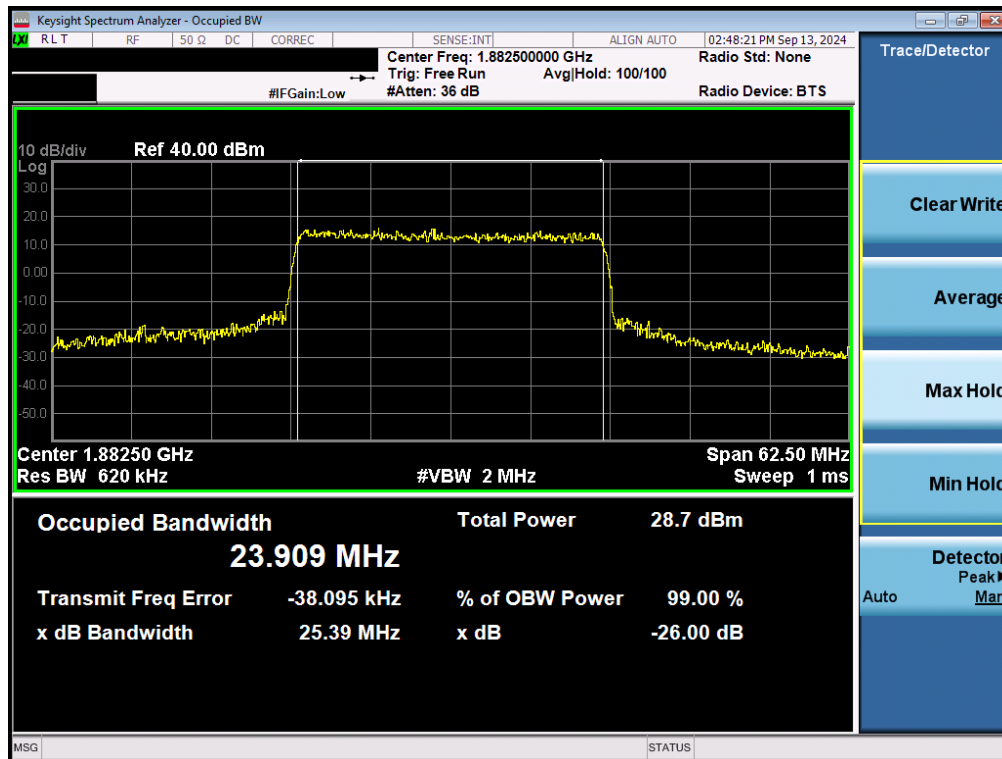


Plot 7-62. Occupied Bandwidth Plot (NR Band n25/2 - 25.0MHz CP-OFDM QPSK - Full RB - ANT2)

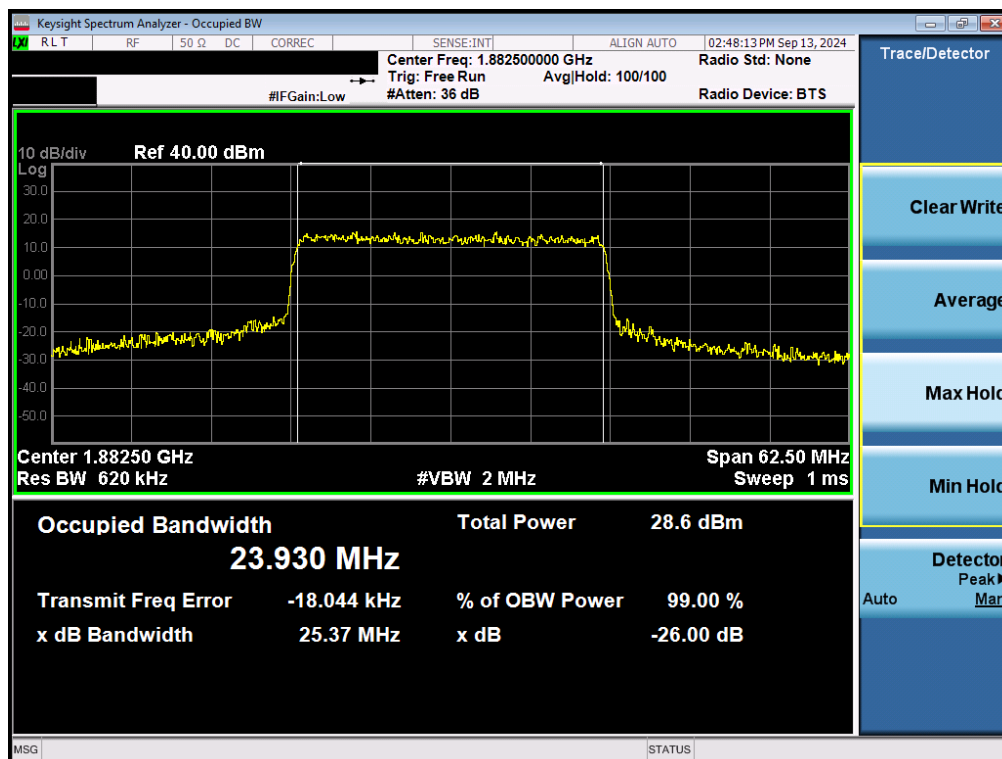


Plot 7-63. Occupied Bandwidth Plot (NR Band n25/2 - 25.0MHz CP-OFDM 16QAM - Full RB - ANT2)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 49 of 174

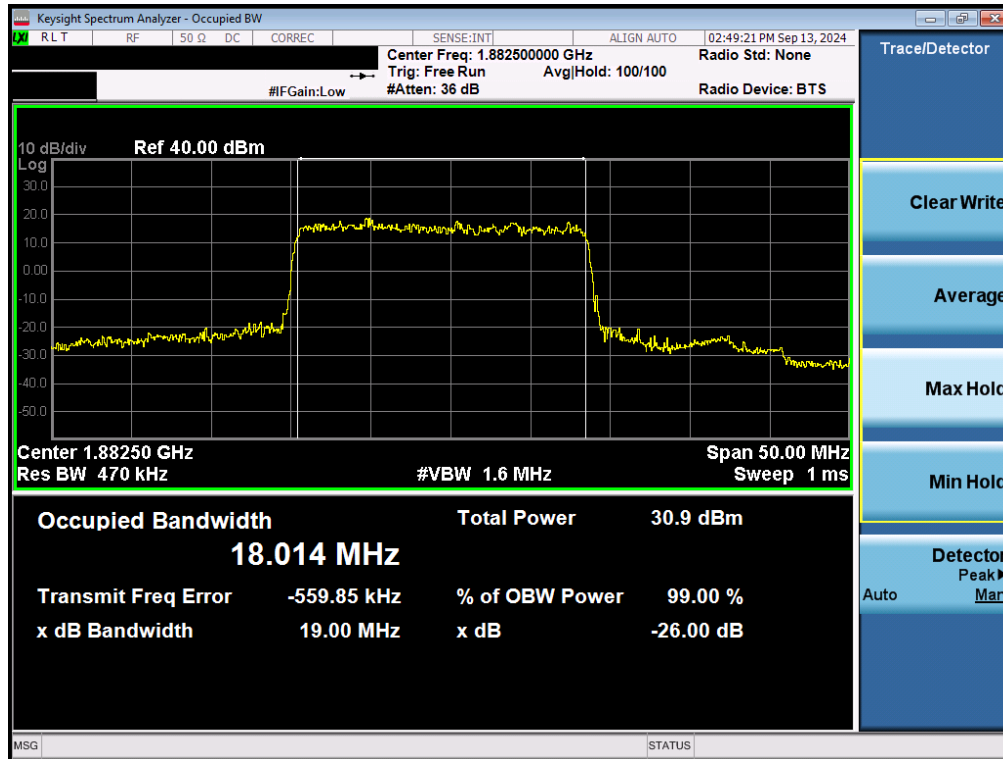


Plot 7-64. Occupied Bandwidth Plot (NR Band n25/2 - 20.0MHz DFT-s-OFDM BPSK - Full RB - ANT2)

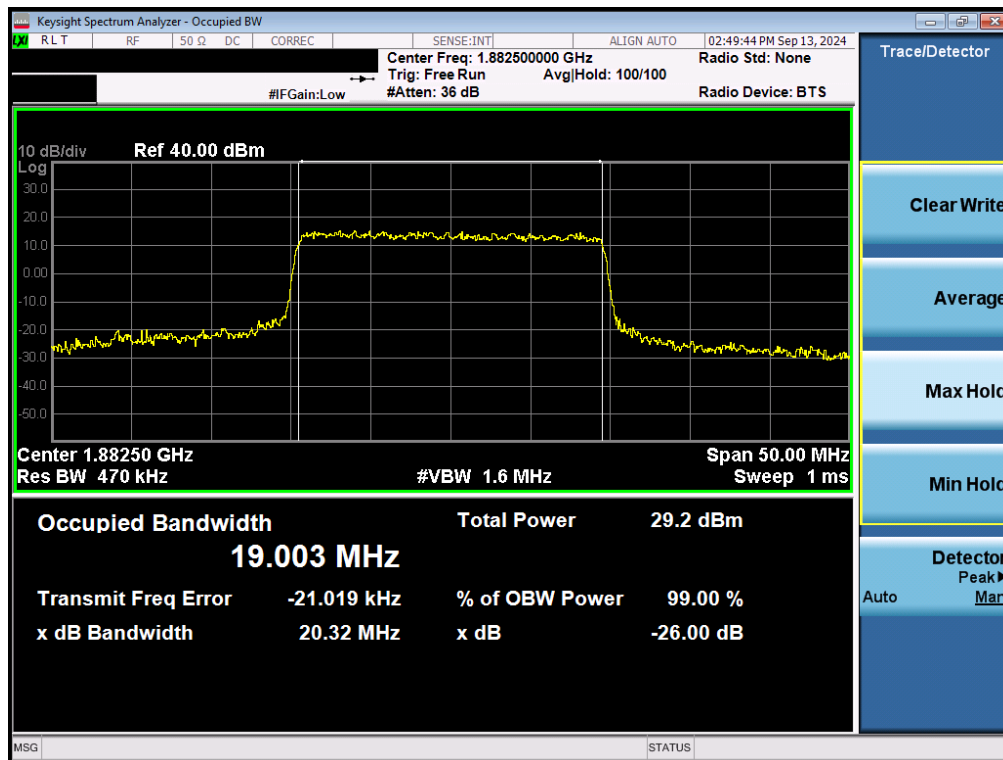


Plot 7-65. Occupied Bandwidth Plot (NR Band n25/2 - 20.0MHz CP-OFDM QPSK - Full RB - ANT2)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 50 of 174

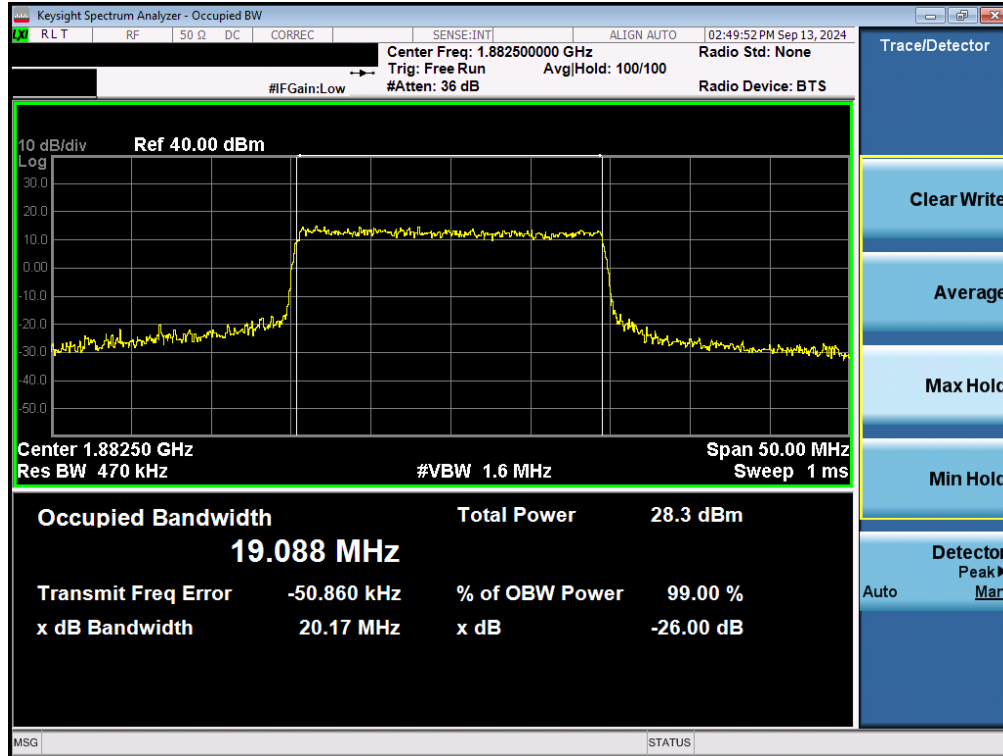


Plot 7-66. Occupied Bandwidth Plot (NR Band n25/2 - 20.0MHz CP-OFDM 16QAM - Full RB - ANT2)

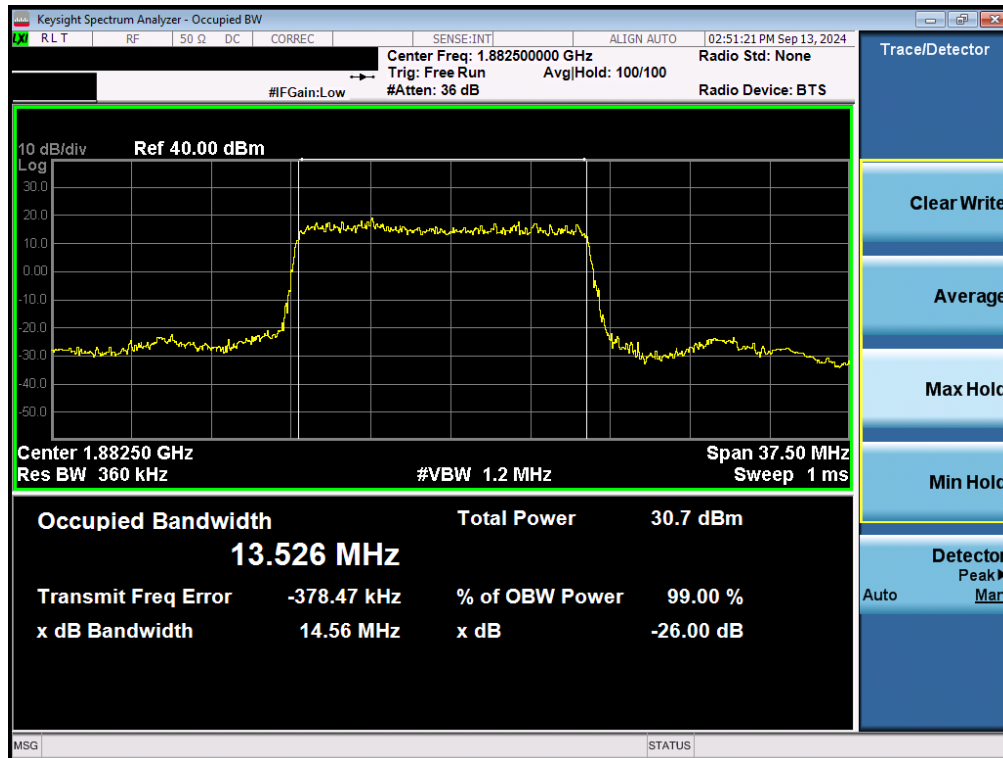


Plot 7-67. Occupied Bandwidth Plot (NR Band n25/2 - 15.0MHz DFT-s-OFDM BPSK - Full RB - ANT2)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 51 of 174

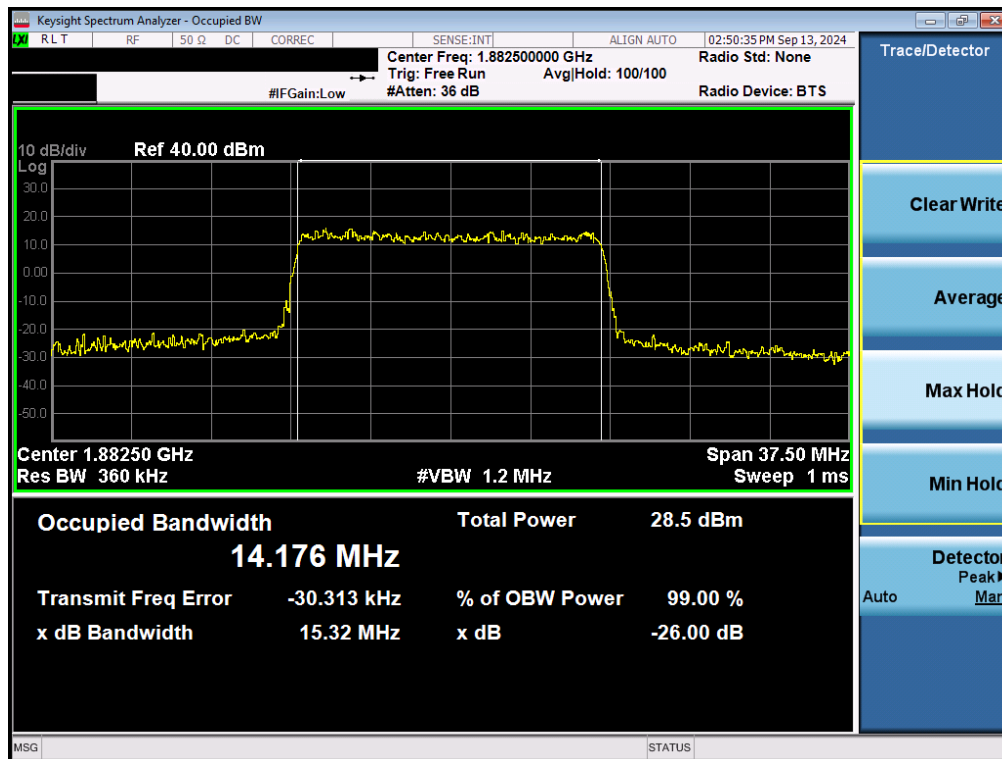


Plot 7-68. Occupied Bandwidth Plot (NR Band n25/2 - 15.0MHz CP-OFDM QPSK - Full RB - ANT2)

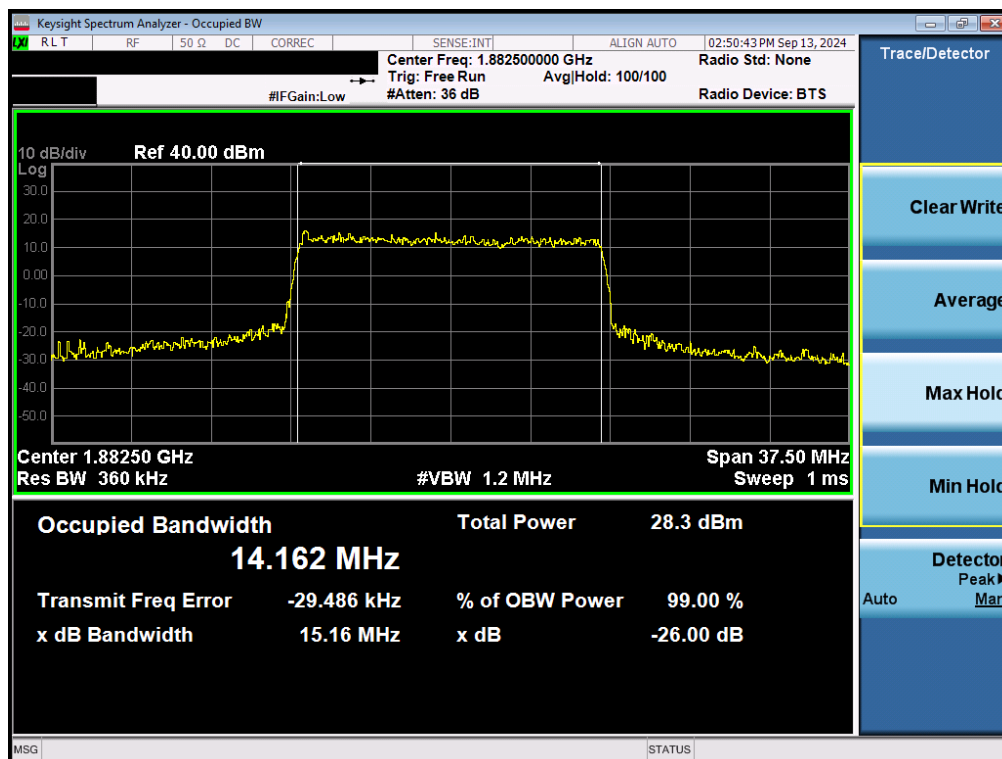


Plot 7-69. Occupied Bandwidth Plot (NR Band n25/2 - 15.0MHz CP-OFDM 16QAM - Full RB - ANT2)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 52 of 174

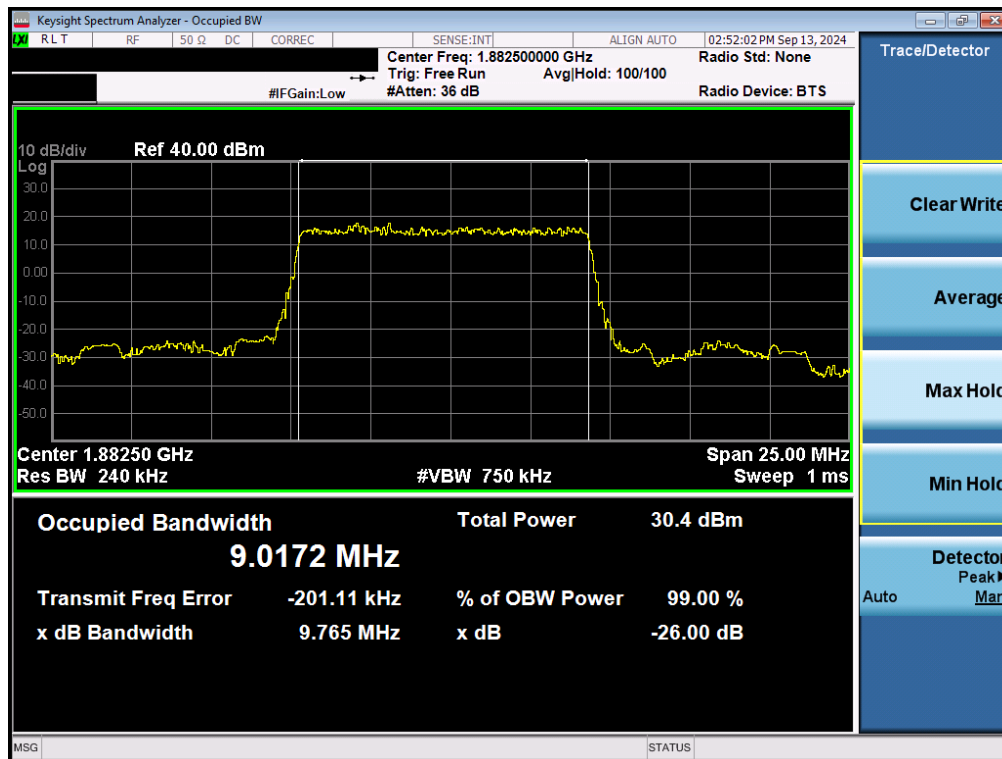


Plot 7-70. Occupied Bandwidth Plot (NR Band n25/2 - 10.0MHz DFT-s-OFDM BPSK - Full RB - ANT2)

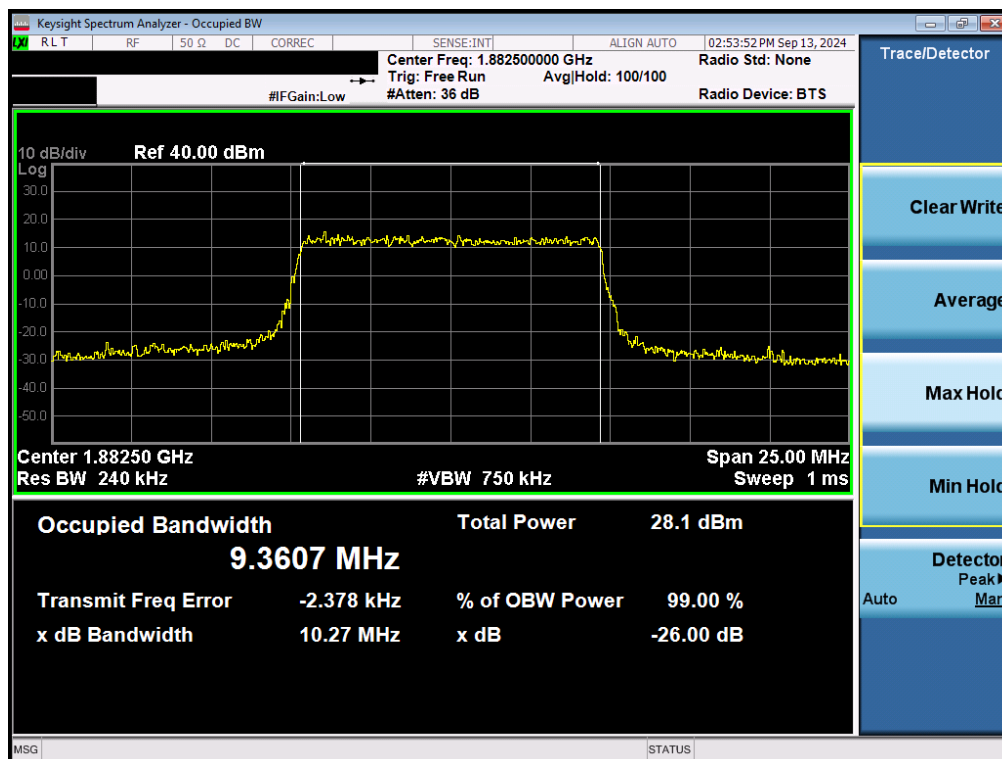


Plot 7-71. Occupied Bandwidth Plot (NR Band n25/2 - 10.0MHz CP-OFDM QPSK - Full RB - ANT2)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 53 of 174

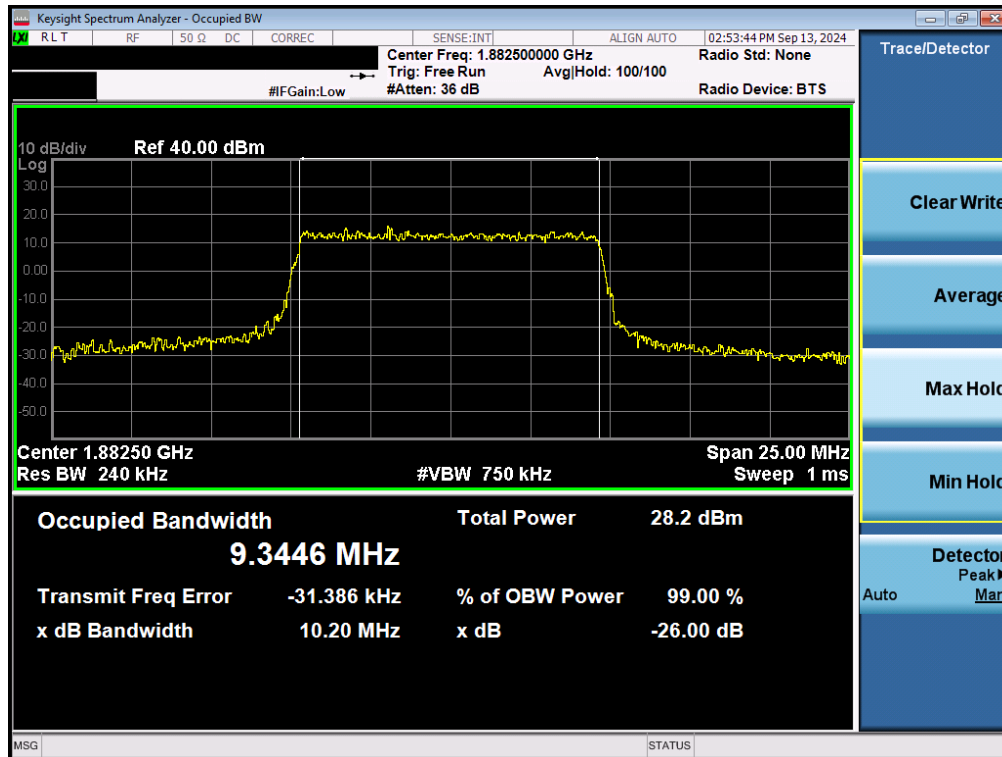


Plot 7-72. Occupied Bandwidth Plot (NR Band n25/2 - 10.0MHz CP-OFDM 16QAM - Full RB - ANT2)

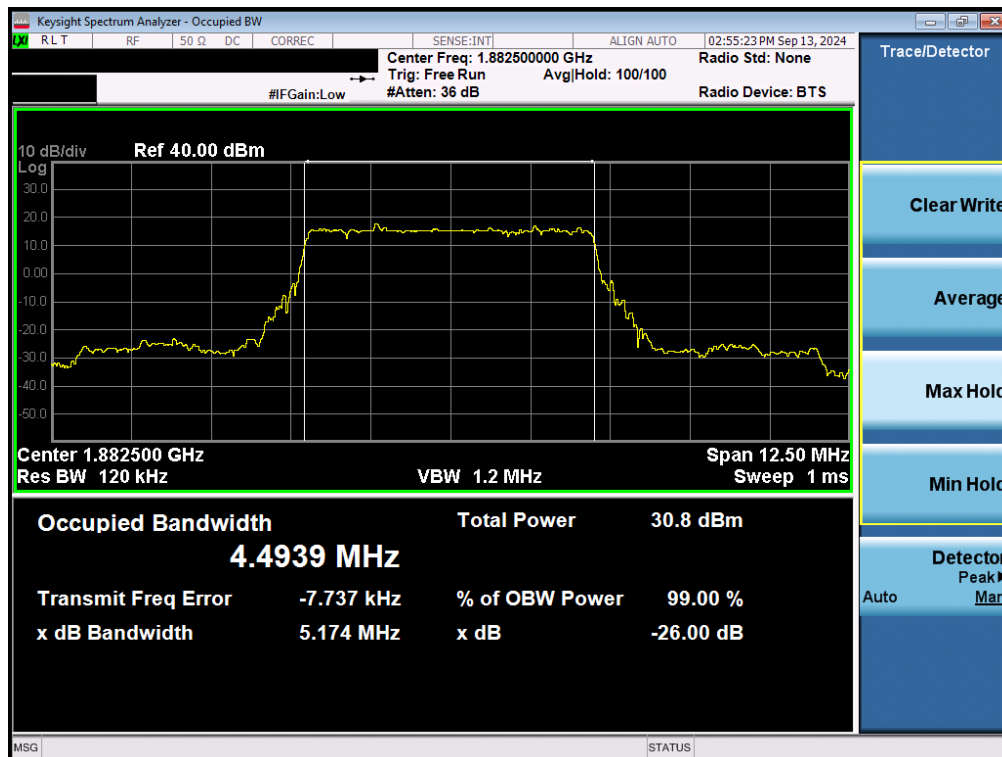


Plot 7-73. Occupied Bandwidth Plot (NR Band n25/2 - 5.0MHz DFT-s-OFDM BPSK - Full RB - ANT2)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 54 of 174

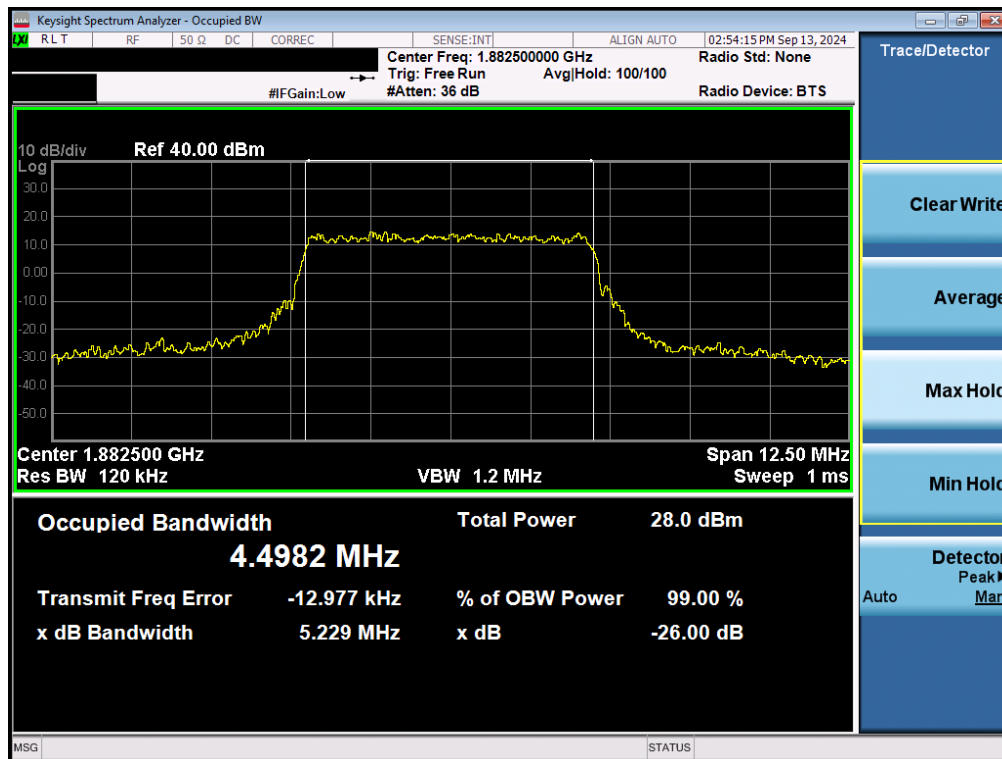

Plot 7-74. Occupied Bandwidth Plot (NR Band n25/2 - 5.0MHz CP-OFDM QPSK - Full RB - ANT2)

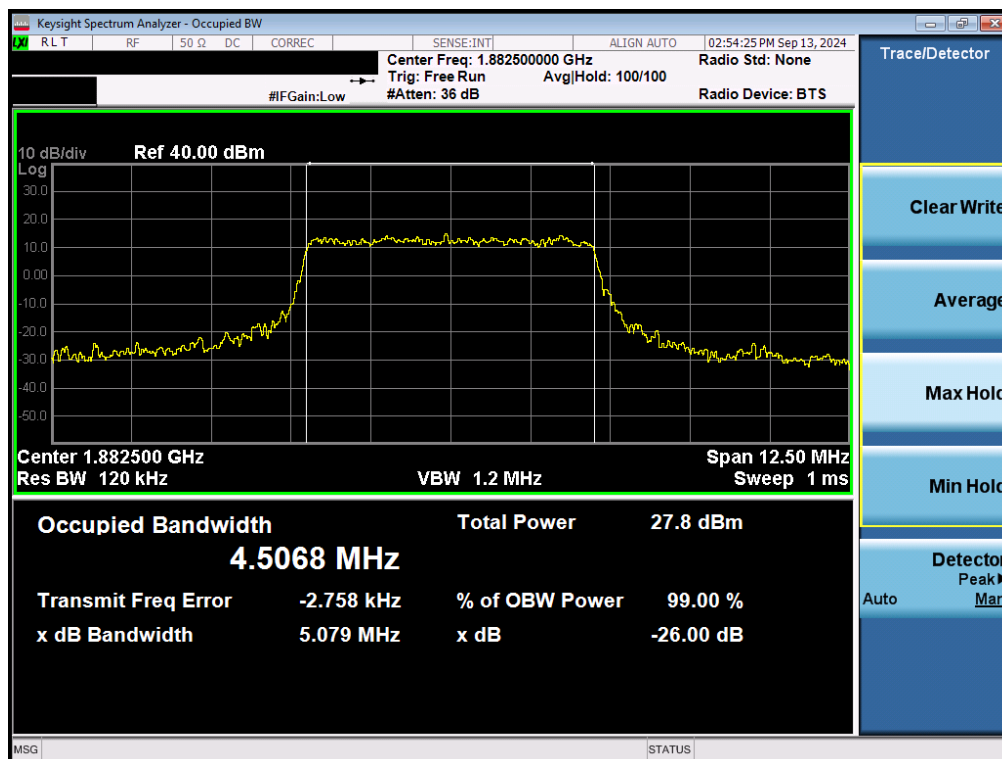

Plot 7-75. Occupied Bandwidth Plot (NR Band n25/2 - 5.0MHz CP-OFDM 16QAM - Full RB - ANT2)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 55 of 174

7.4 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{\text{Watts}})$, where P is the transmitter power in Watts.

Test Procedure Used

ANSI C63.26-2015 – Section 5.7.4

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 20GHz (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

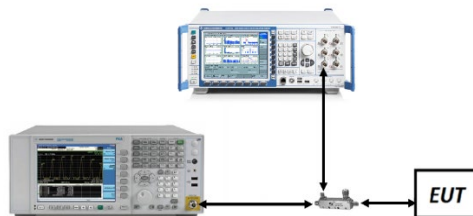



Figure 7-3. Test Instrument & Measurement Setup

Test Notes


1. Per Part 24 and RSS-133, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz.
2. For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 56 of 174

GSM/GPRS PCS – Ant1

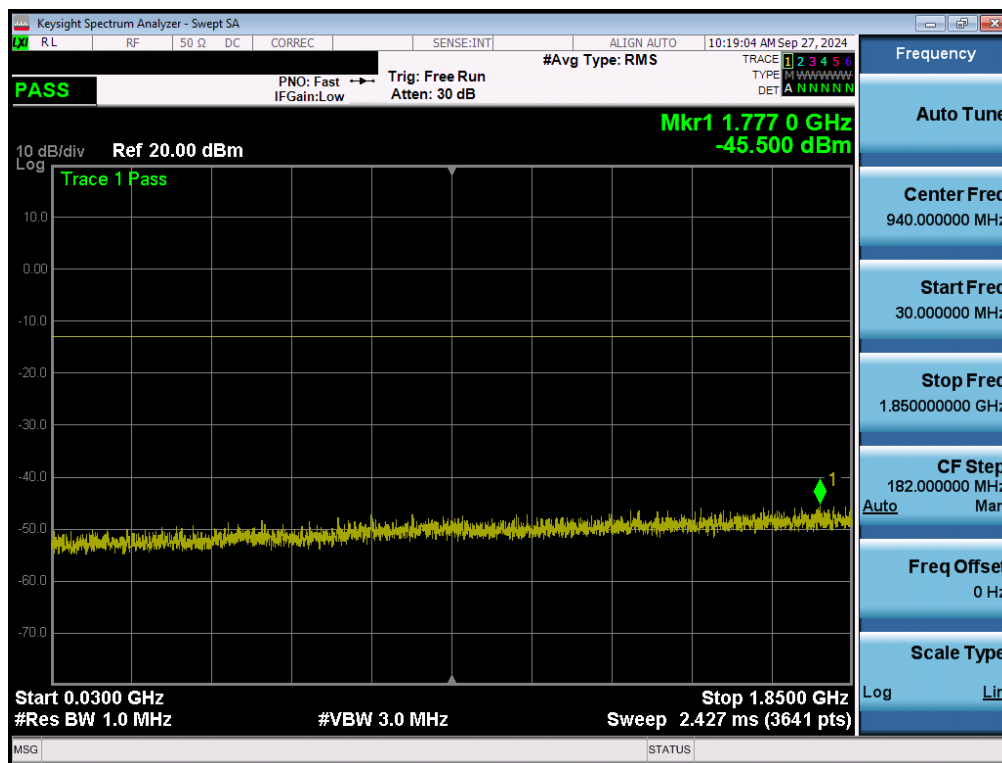


Plot 7-76. Conducted Spurious Plot (GPRS Ch. 512 - Ant1)

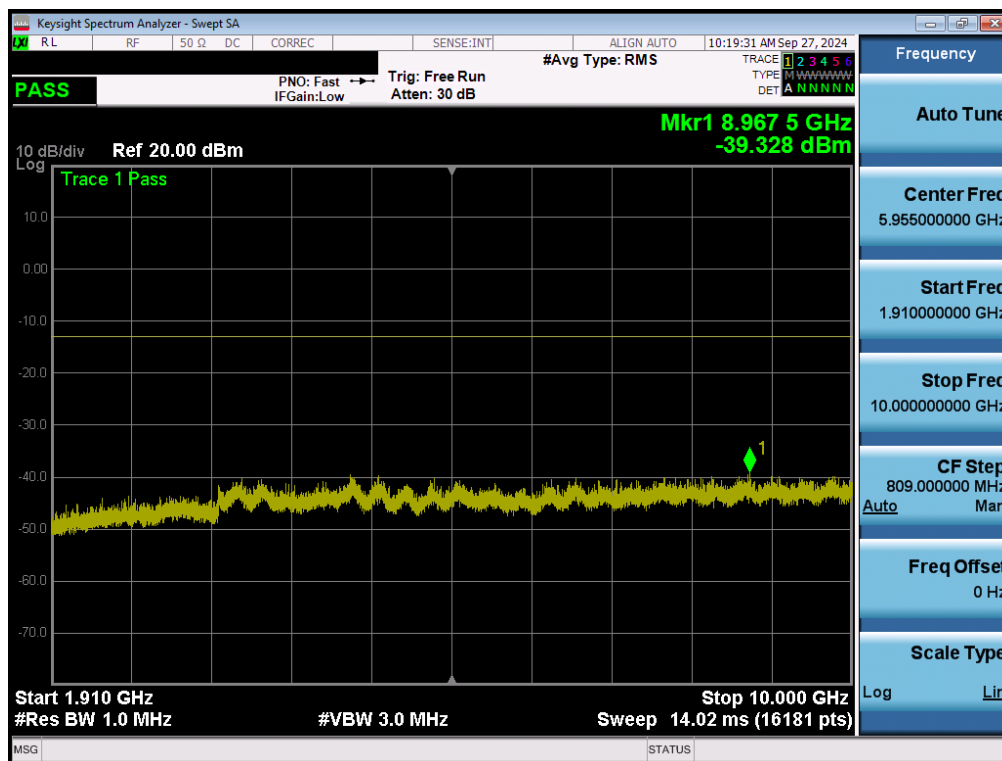


Plot 7-77. Conducted Spurious Plot (GPRS Ch. 512 - Ant1)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 57 of 174

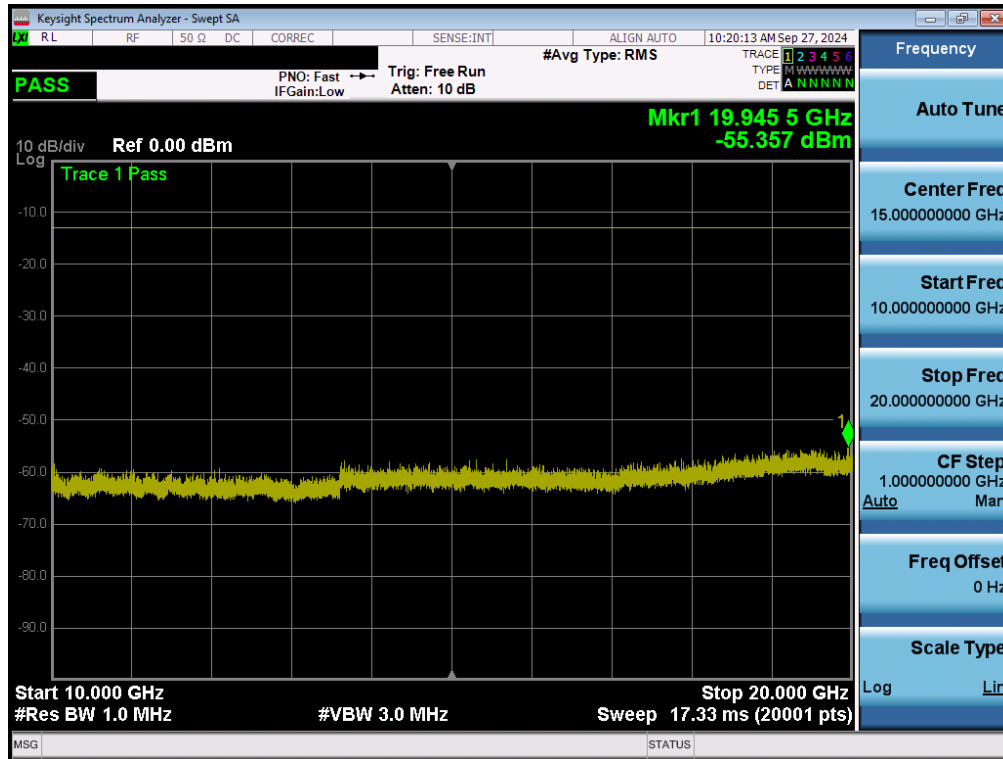


Plot 7-78. Conducted Spurious Plot (GPRS Ch. 512 - Ant1)

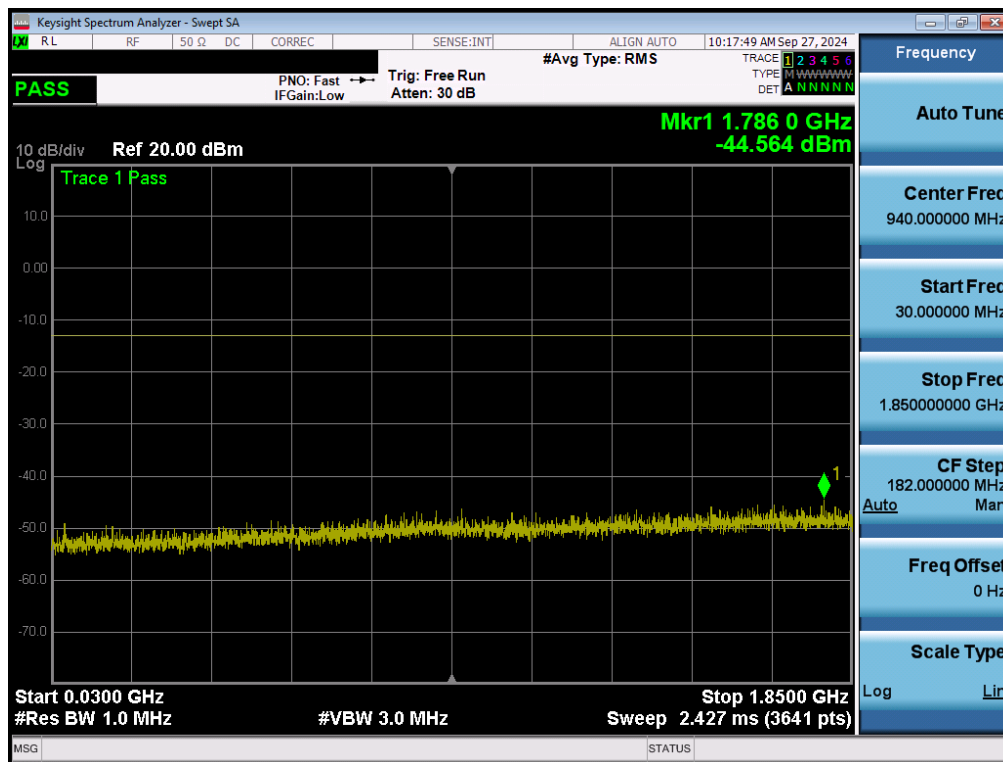


Plot 7-79. Conducted Spurious Plot (GPRS Ch. 661 - Ant1)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 58 of 174

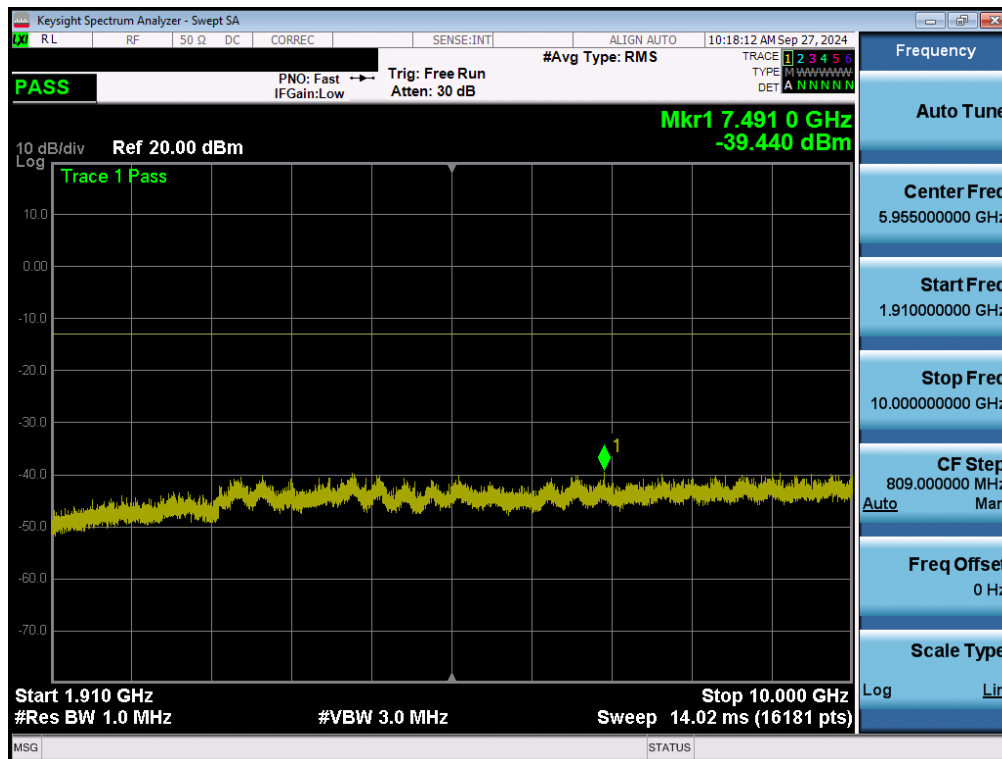


Plot 7-80. Conducted Spurious Plot (GPRS Ch. 661 - Ant1)

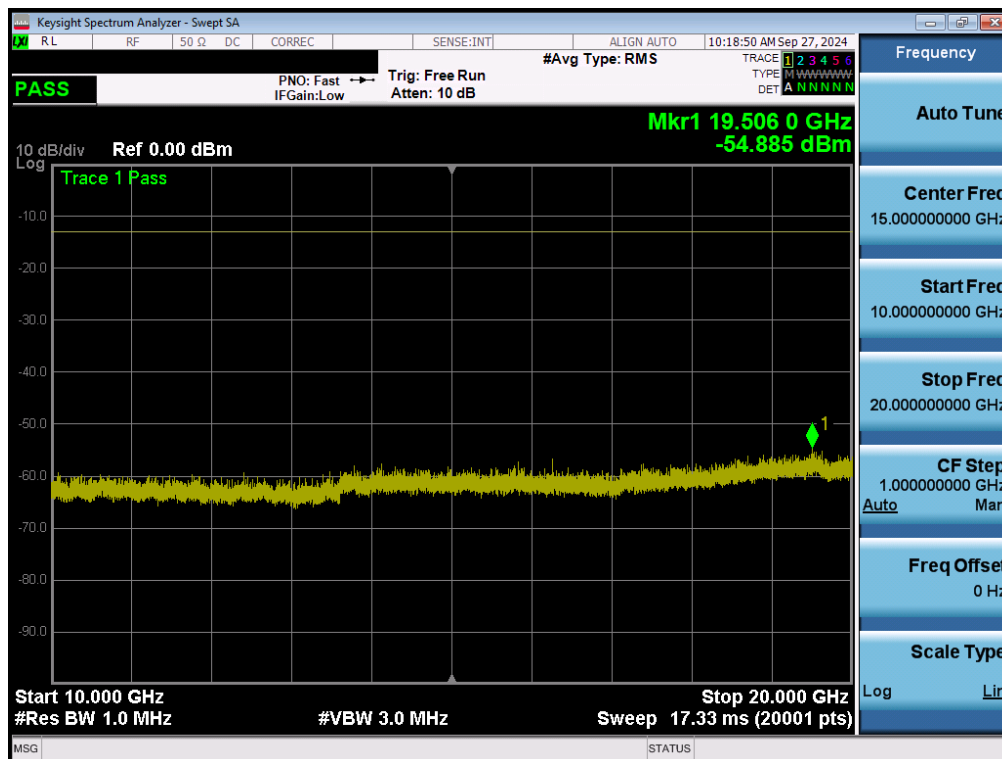


Plot 7-81. Conducted Spurious Plot (GPRS Ch. 661 - Ant1)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 59 of 174

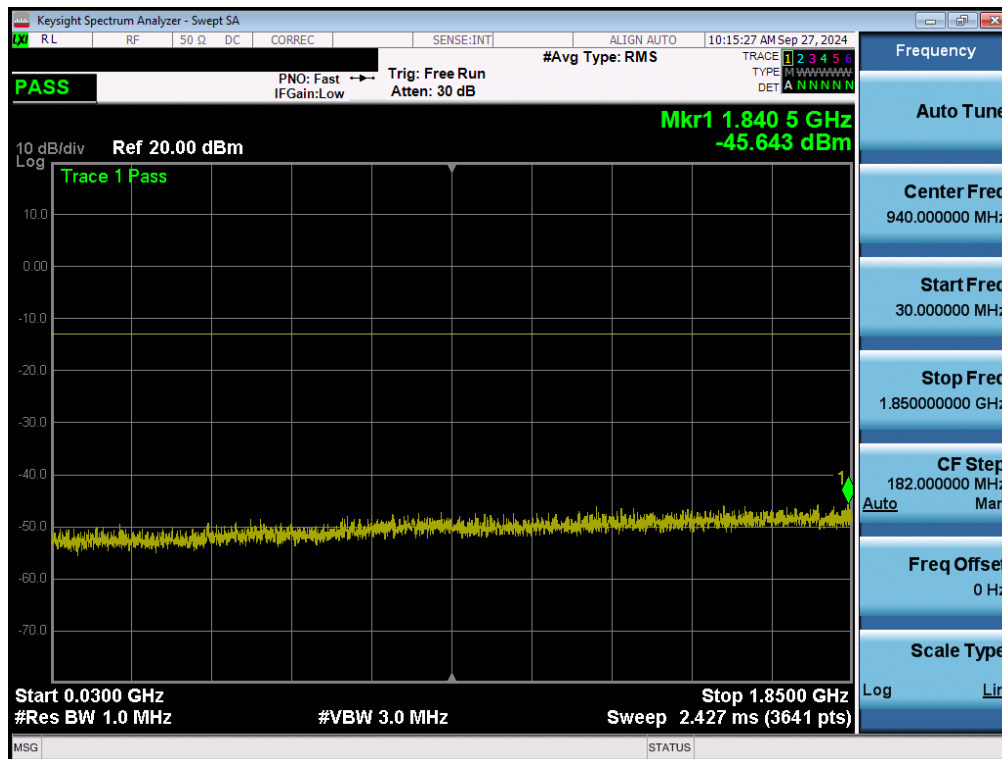

Plot 7-82. Conducted Spurious Plot (GPRS Ch. 810 - Ant1)

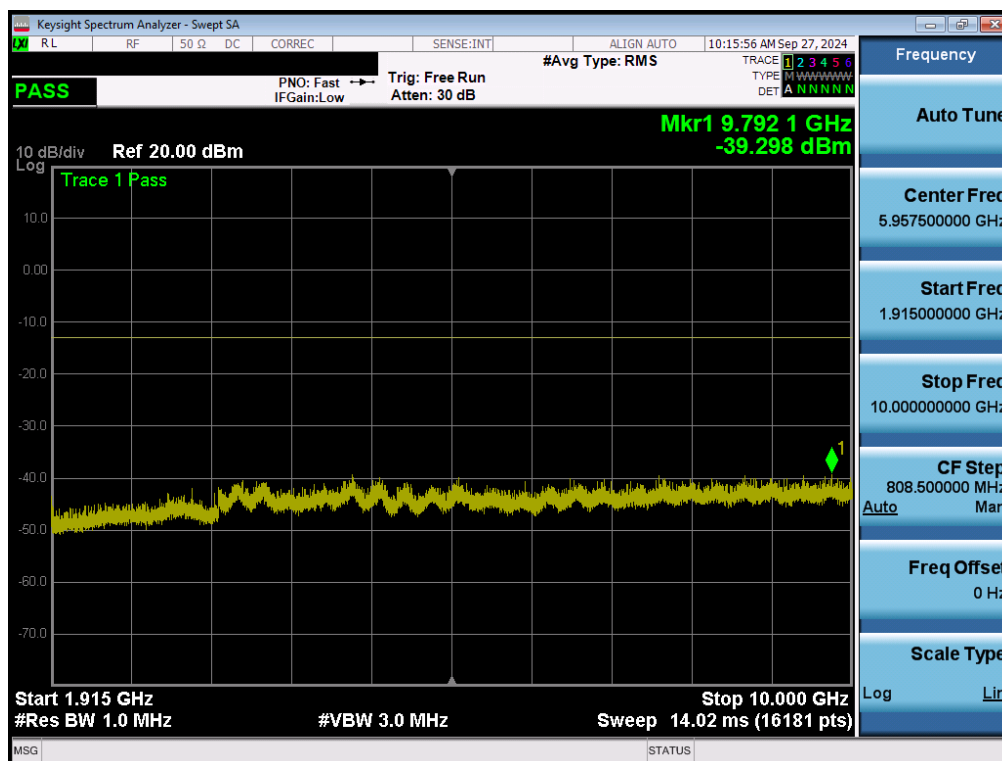

Plot 7-83. Conducted Spurious Plot (GPRS Ch. 810 - Ant1)

FCC ID: A3LSMS938U	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2408260067-02-R1.A3L	Test Dates: 09/06 - 10/17/2024	EUT Type: Portable Handset	Page 60 of 174