



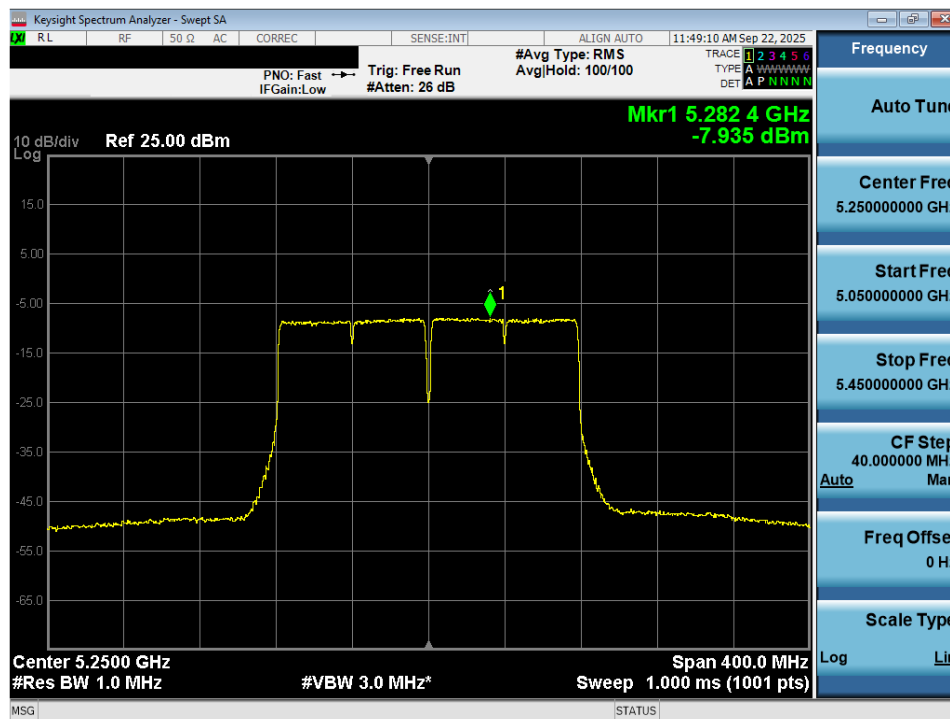


Plot 7-99. Power Spectral Density Plot MIMO ANT2 (160MHz BW 802.11ac (UNII Band 1/2A) – Ch. 50)

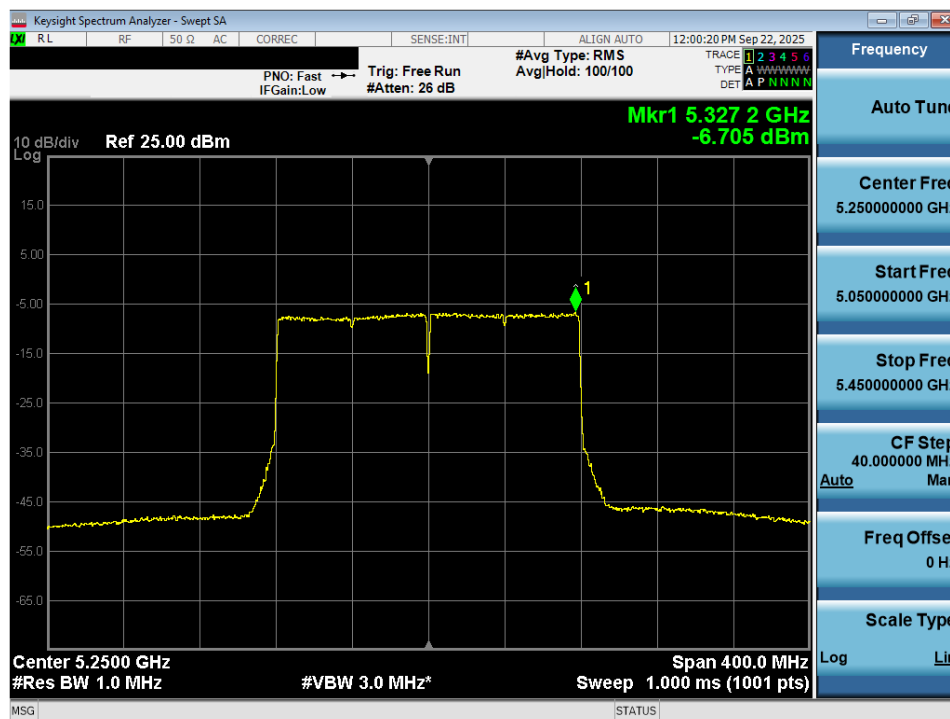


Plot 7-100. Power Spectral Density Plot MIMO ANT2 (160MHz BW 802.11be (UNII Band 1/2A) – Ch. 50)

|                                            |                                  |                               |                                   |
|--------------------------------------------|----------------------------------|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS942B                         | MEASUREMENT REPORT               |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2508270084-16-R1.A3L | Test Dates:<br>9/2/25 - 12/30/25 | EUT Type:<br>Portable Handset | Page 86 of 144                    |

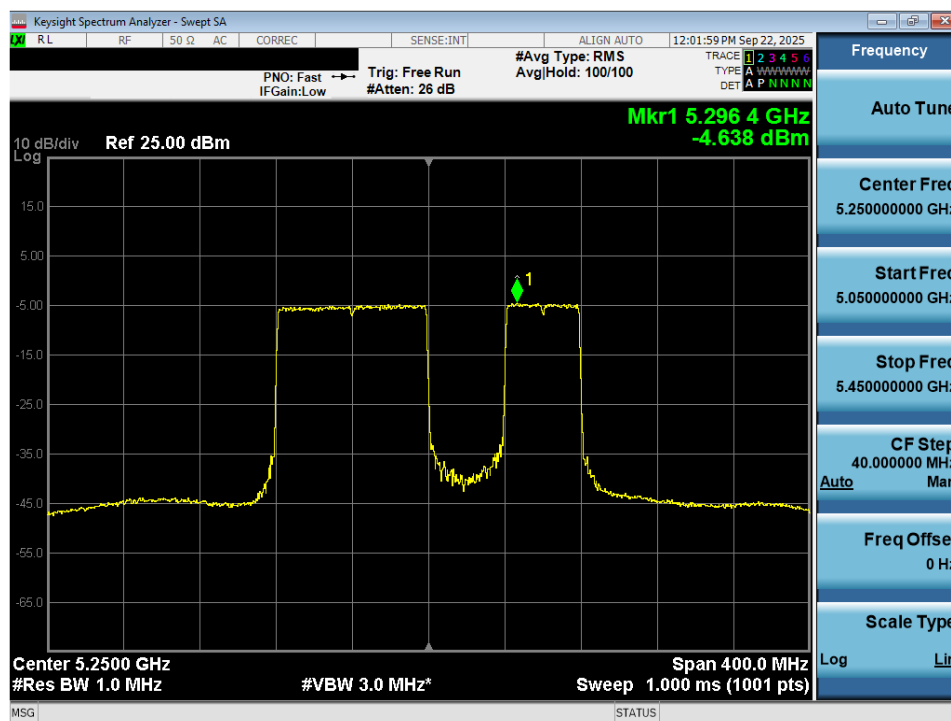


Plot 7-101. Power Spectral Density Plot MIMO ANT2 (160MHz BW 802.11be (40MHz Puncture) (UNII Band 1/2A) – Ch. 50)

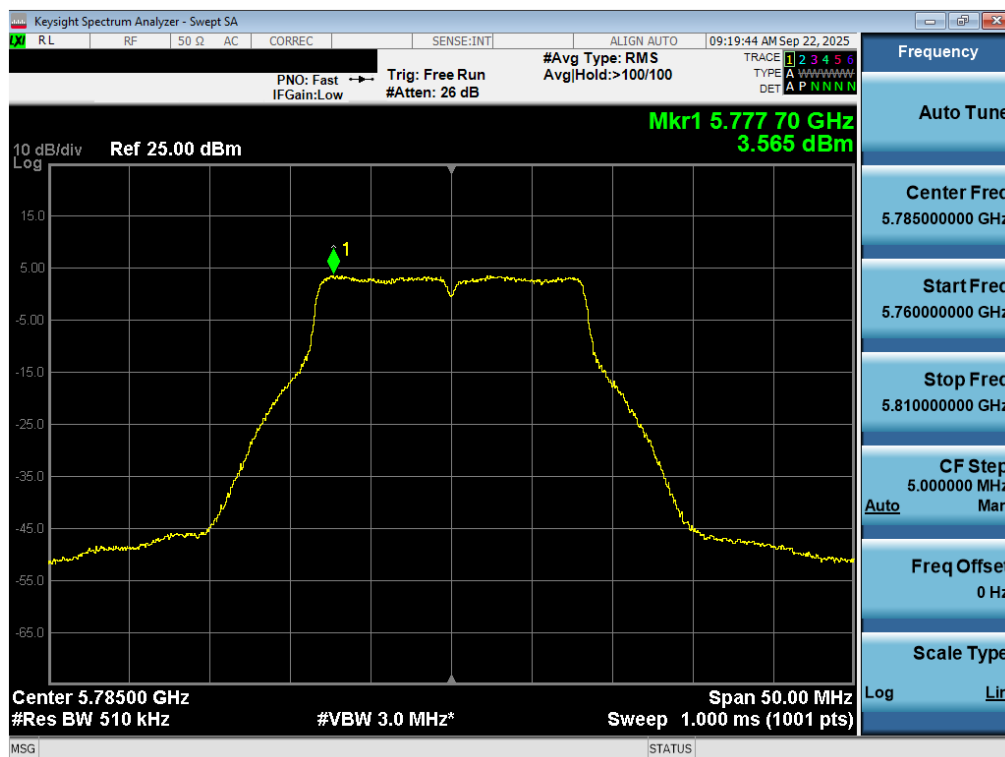


Plot 7-102. Power Spectral Density Plot MIMO ANT2 (802.11a (UNII Band 3) – Ch. 157)

|                                            |                                  |                               |                                   |
|--------------------------------------------|----------------------------------|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS942B                         | MEASUREMENT REPORT               |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2508270084-16-R1.A3L | Test Dates:<br>9/2/25 - 12/30/25 | EUT Type:<br>Portable Handset | Page 87 of 144                    |

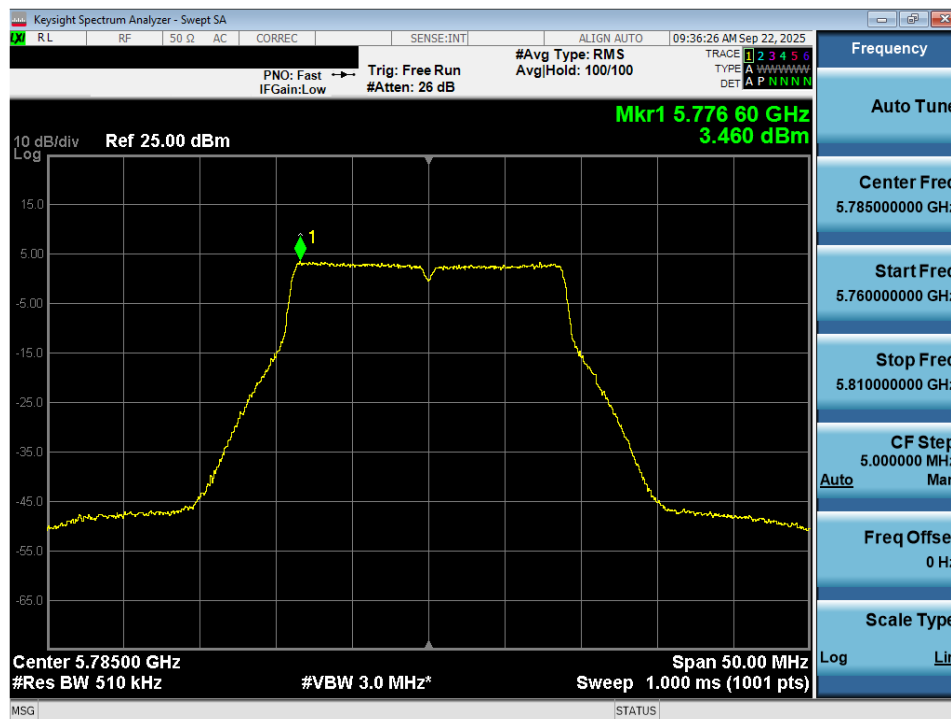


Plot 7-103. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

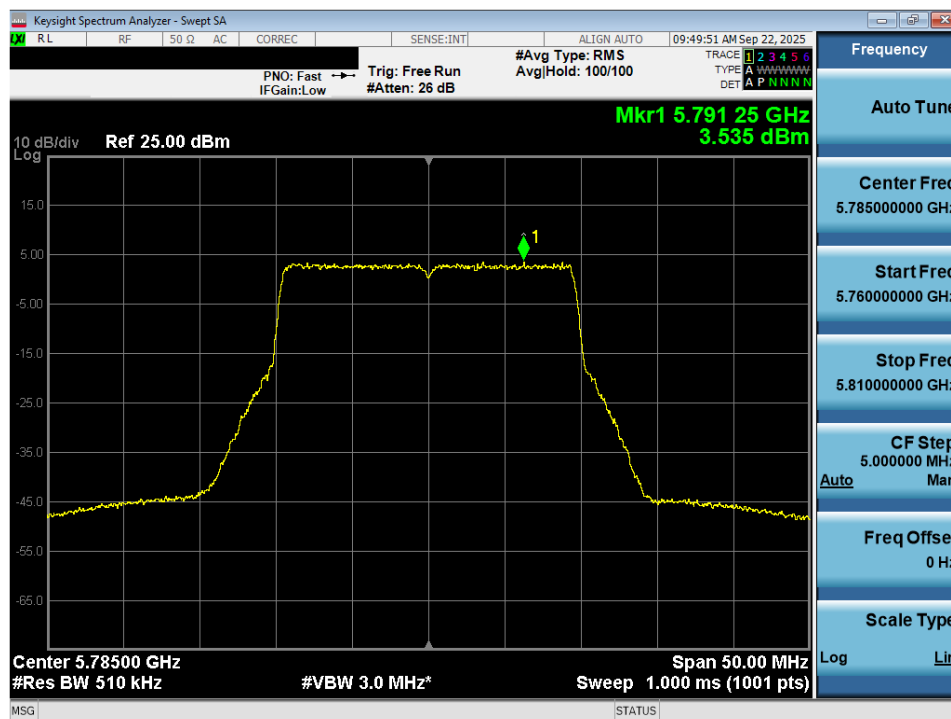


Plot 7-104. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11be (UNII Band 3) – Ch. 157)

|                                            |                                  |                               |                                   |
|--------------------------------------------|----------------------------------|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS942B                         | MEASUREMENT REPORT               |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2508270084-16-R1.A3L | Test Dates:<br>9/2/25 - 12/30/25 | EUT Type:<br>Portable Handset | Page 88 of 144                    |

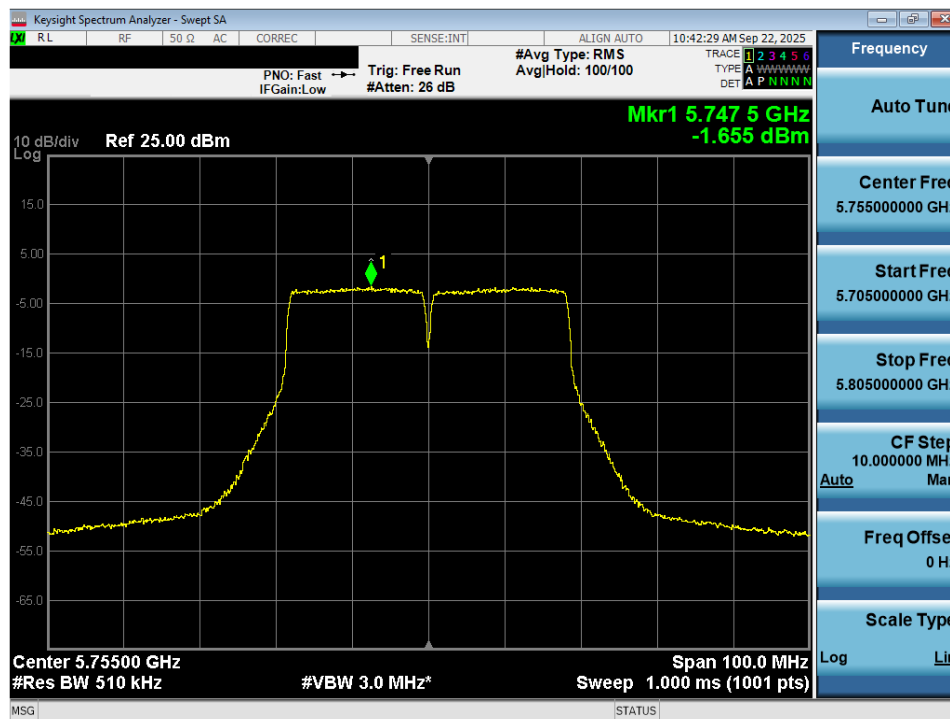


Plot 7-105. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

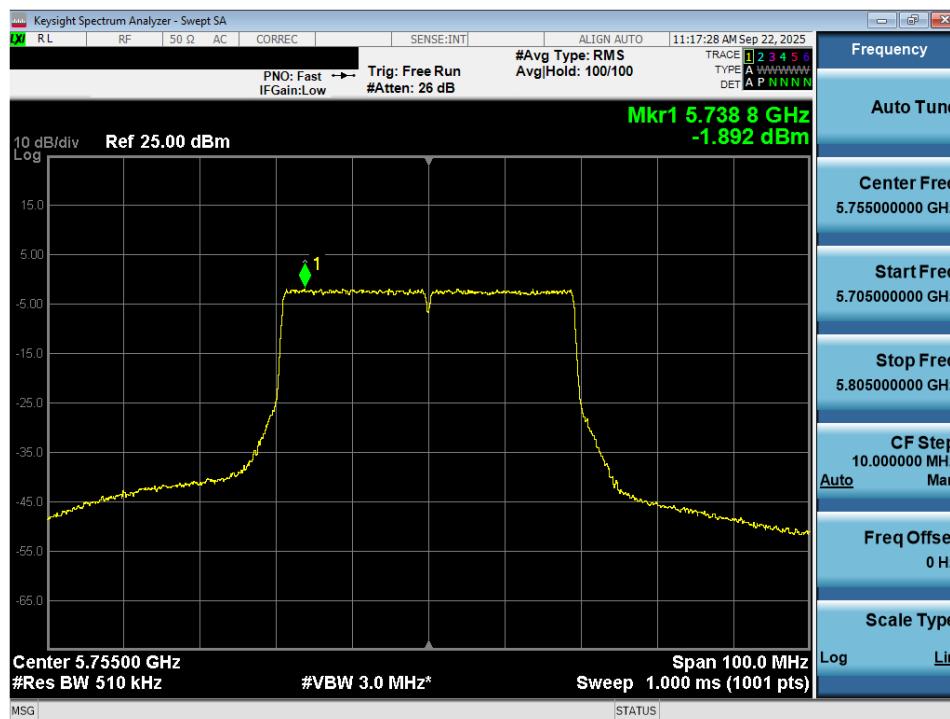


Plot 7-106. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11be (UNII Band 3) – Ch. 151)

|                                            |                                  |                               |                                   |
|--------------------------------------------|----------------------------------|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS942B                         | MEASUREMENT REPORT               |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2508270084-16-R1.A3L | Test Dates:<br>9/2/25 - 12/30/25 | EUT Type:<br>Portable Handset | Page 89 of 144                    |

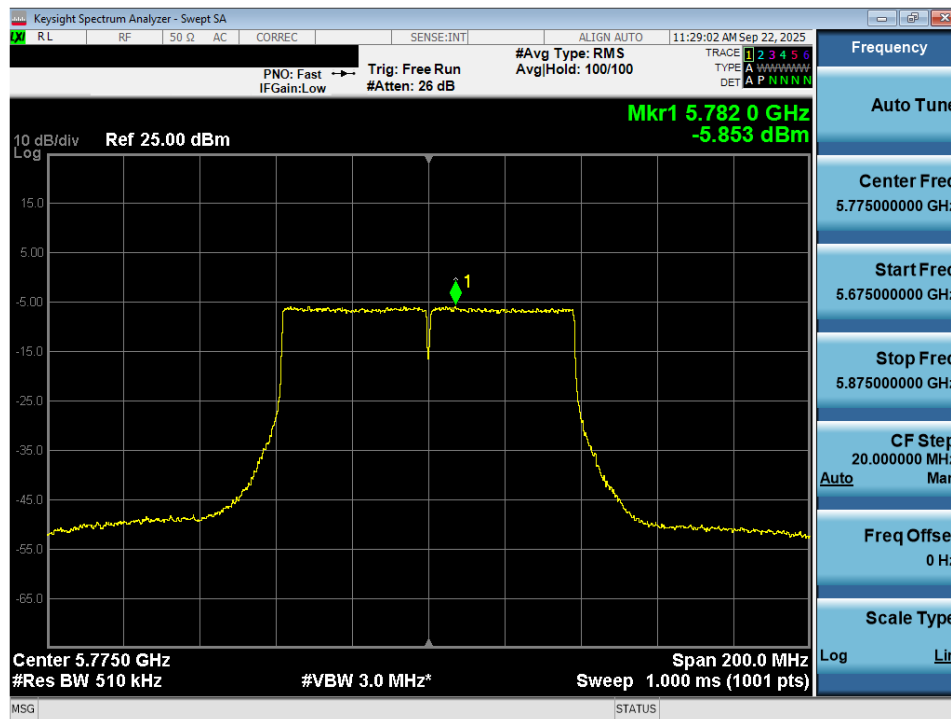


Plot 7-107. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

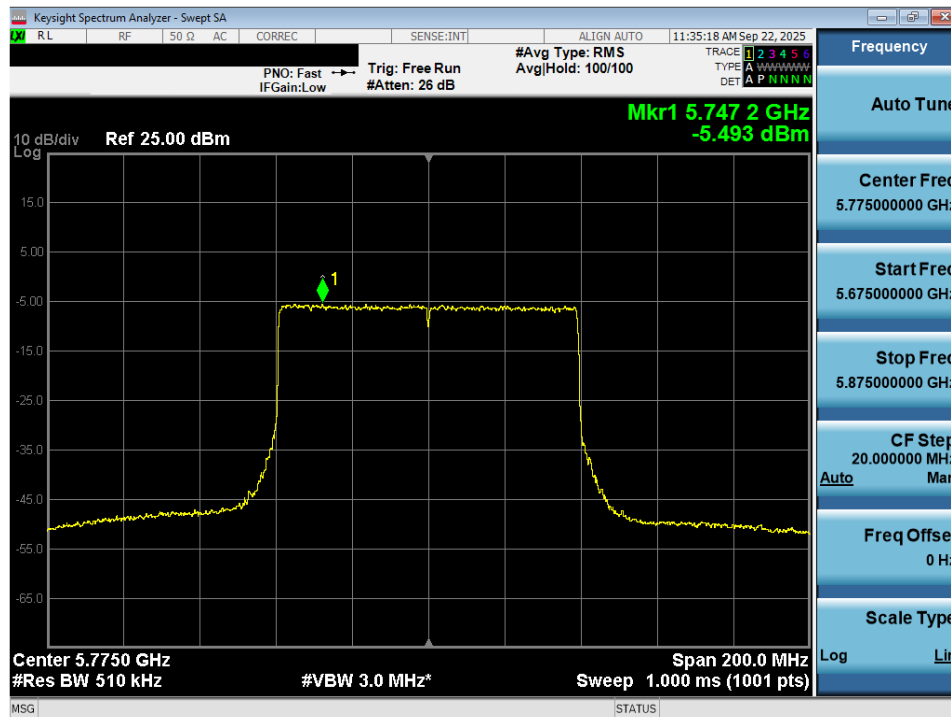


Plot 7-108. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11be (UNII Band 3) – Ch. 155)

|                                            |                                  |                               |                                   |
|--------------------------------------------|----------------------------------|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS942B                         | MEASUREMENT REPORT               |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2508270084-16-R1.A3L | Test Dates:<br>9/2/25 - 12/30/25 | EUT Type:<br>Portable Handset | Page 90 of 144                    |

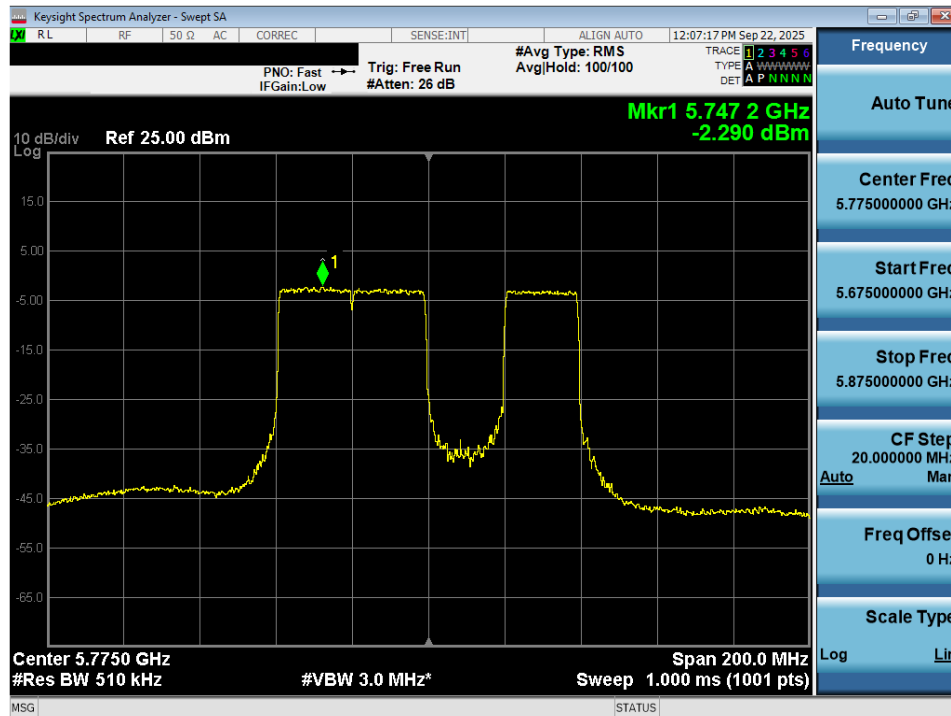


Plot 7-109. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11be (20MHz Puncture) (UNII Band 3) – Ch. 155)

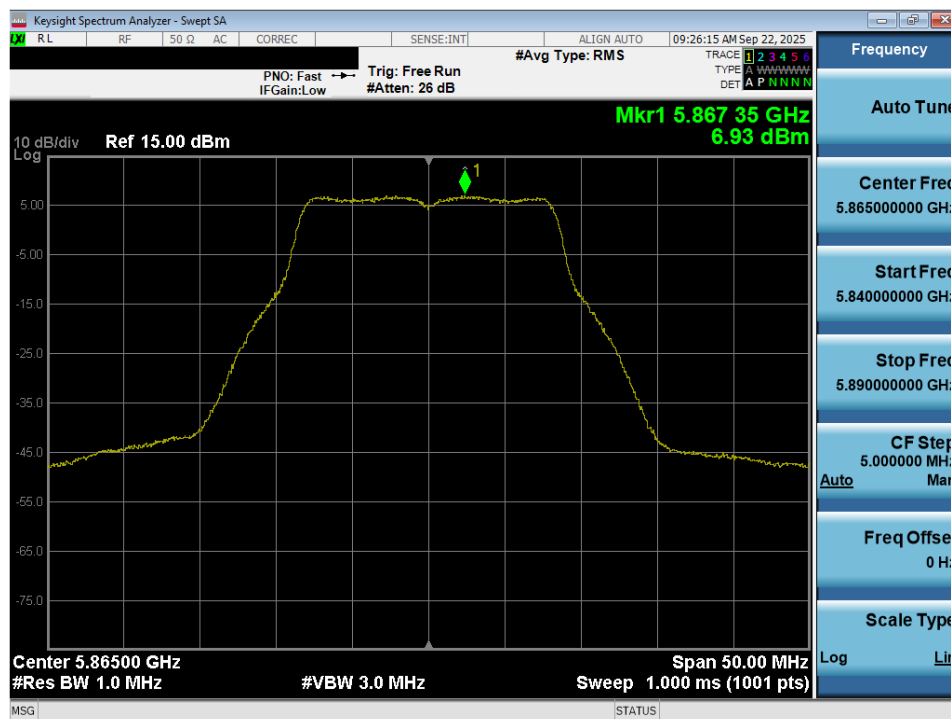


Plot 7-110. Power Spectral Density Plot MIMO ANT2 (802.11a (UNII Band 4) – Ch. 173)

|                                            |                                  |                               |                                   |
|--------------------------------------------|----------------------------------|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS942B                         | MEASUREMENT REPORT               |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2508270084-16-R1.A3L | Test Dates:<br>9/2/25 - 12/30/25 | EUT Type:<br>Portable Handset | Page 91 of 144                    |

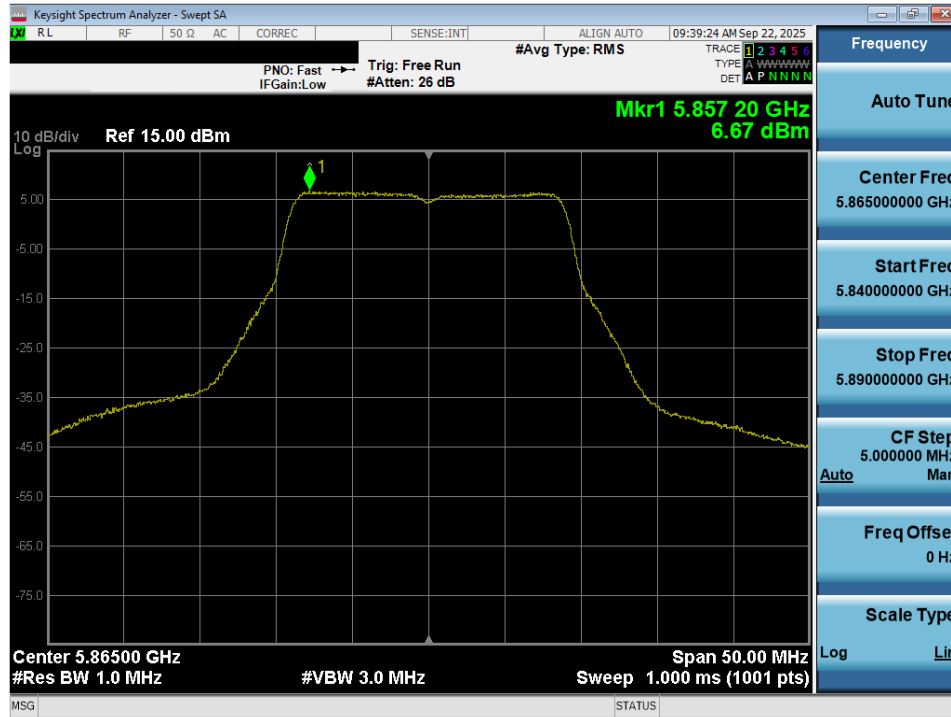


Plot 7-111. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11n (UNII Band 4) – Ch. 173)

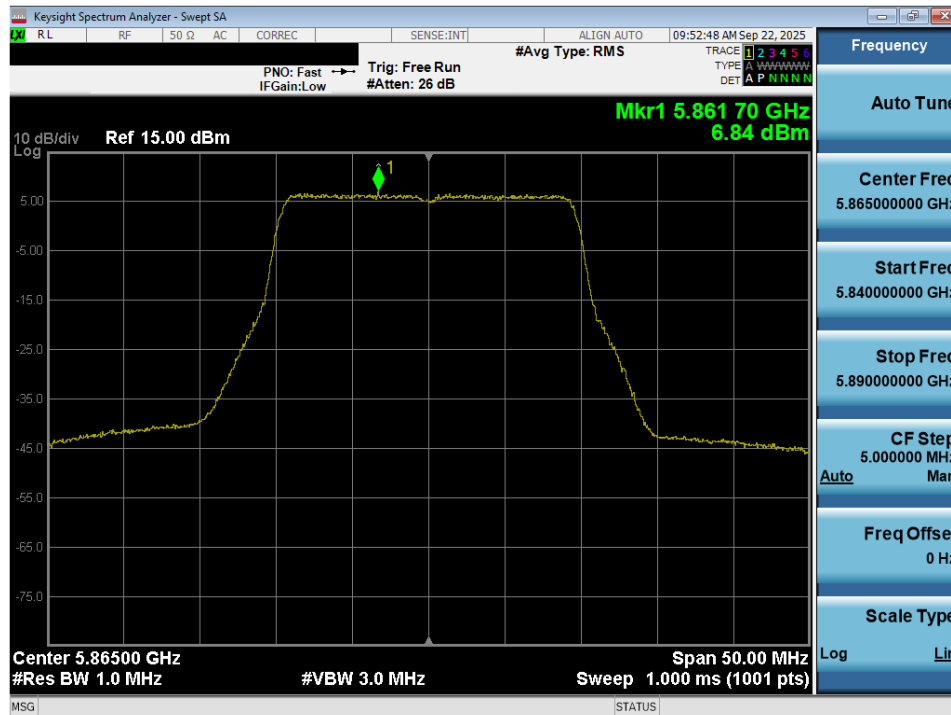


Plot 7-112. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11be (UNII Band 4) – Ch. 173)

|                                            |                                  |                               |                                   |
|--------------------------------------------|----------------------------------|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS942B                         | MEASUREMENT REPORT               |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2508270084-16-R1.A3L | Test Dates:<br>9/2/25 - 12/30/25 | EUT Type:<br>Portable Handset | Page 92 of 144                    |

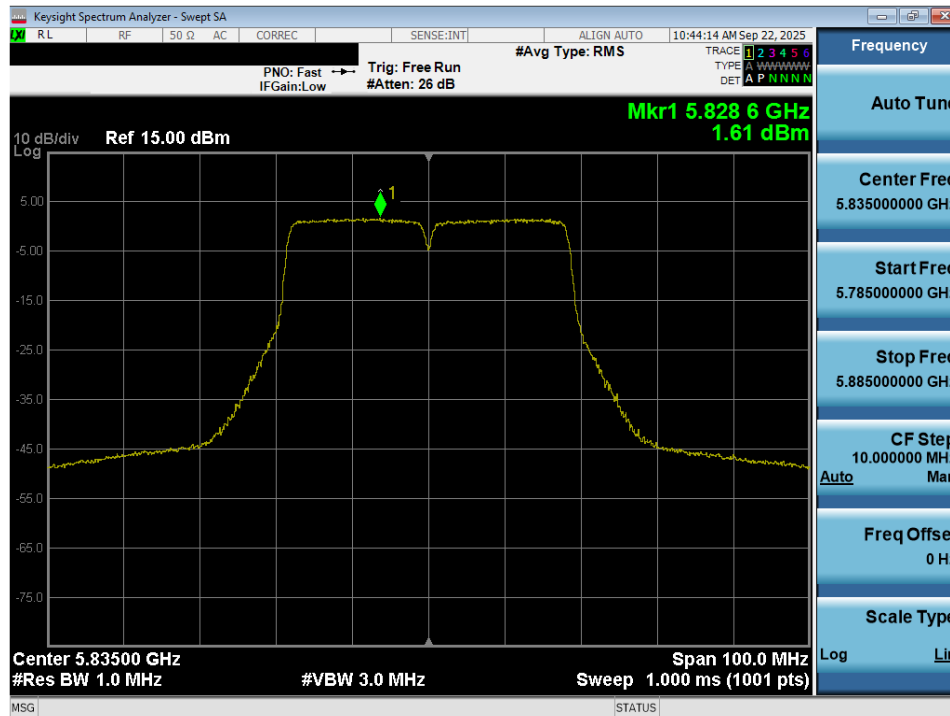


Plot 7-113. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11n (UNII Band 3/4) – Ch. 167)

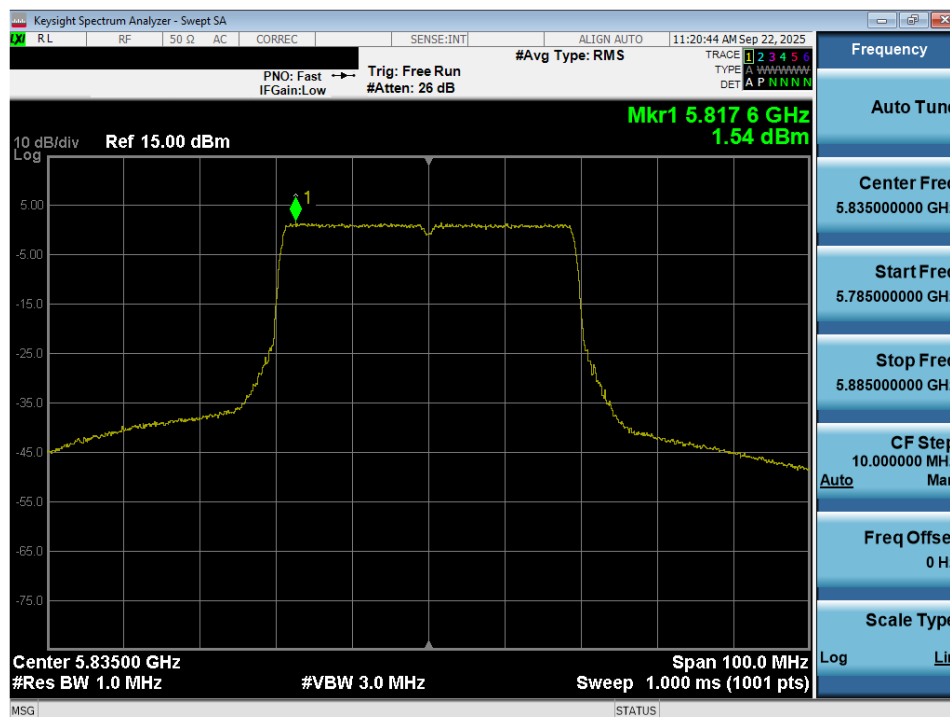


Plot 7-114. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11be (UNII Band 3/4) – Ch. 167)

|                                            |                                  |                               |                                   |
|--------------------------------------------|----------------------------------|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS942B                         | MEASUREMENT REPORT               |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2508270084-16-R1.A3L | Test Dates:<br>9/2/25 - 12/30/25 | EUT Type:<br>Portable Handset | Page 93 of 144                    |

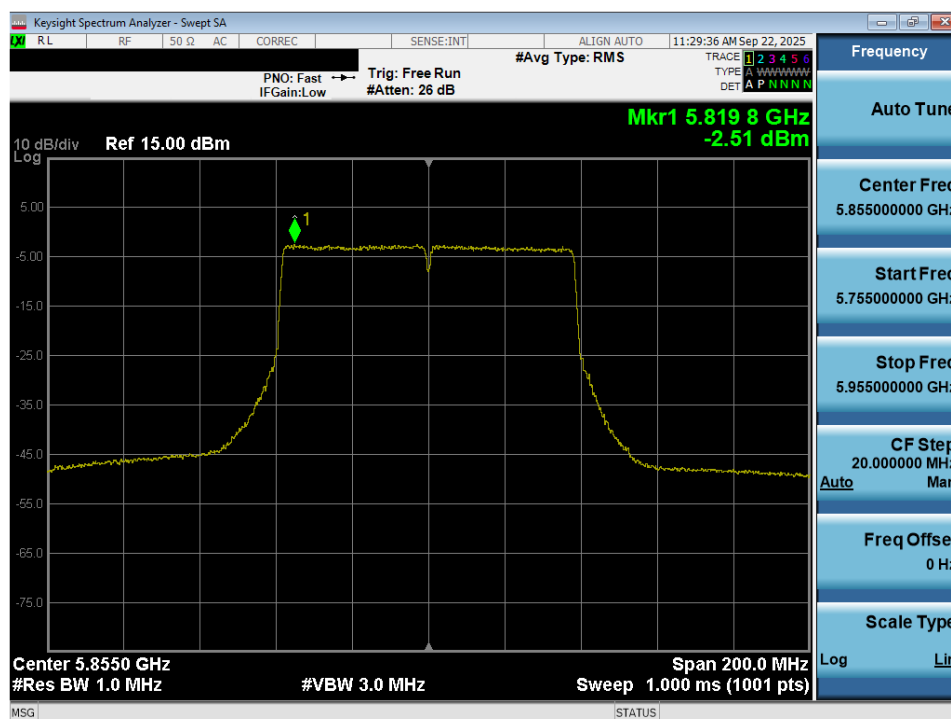


Plot 7-115. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ac (UNII Band 3/4) – Ch. 171)

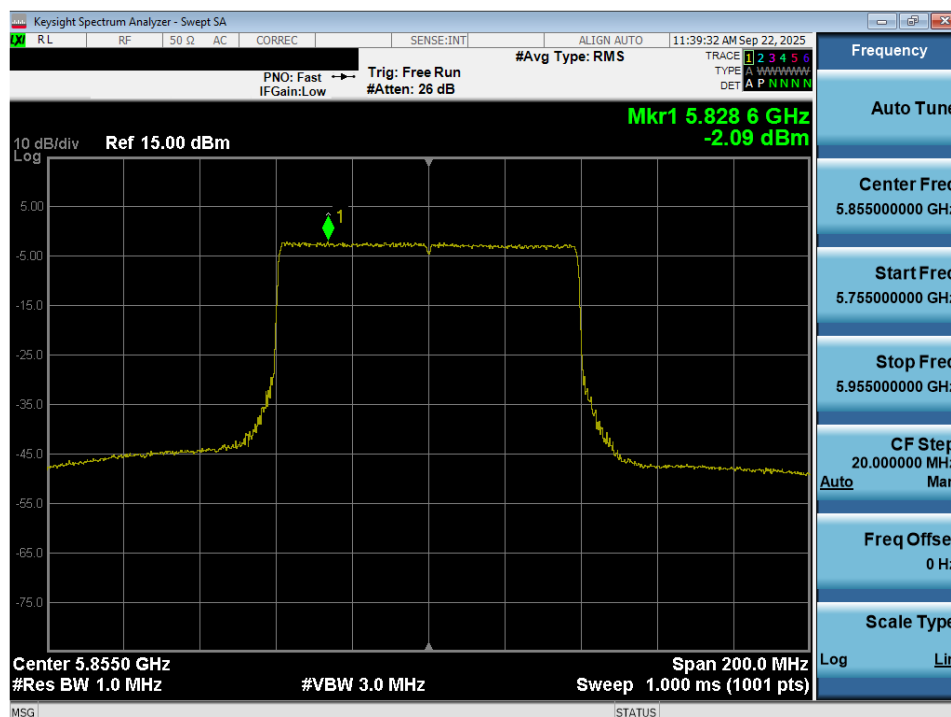


Plot 7-116. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11be (UNII Band 3/4) – Ch. 171)

|                                            |                                  |                               |                                   |
|--------------------------------------------|----------------------------------|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS942B                         | MEASUREMENT REPORT               |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2508270084-16-R1.A3L | Test Dates:<br>9/2/25 - 12/30/25 | EUT Type:<br>Portable Handset | Page 94 of 144                    |

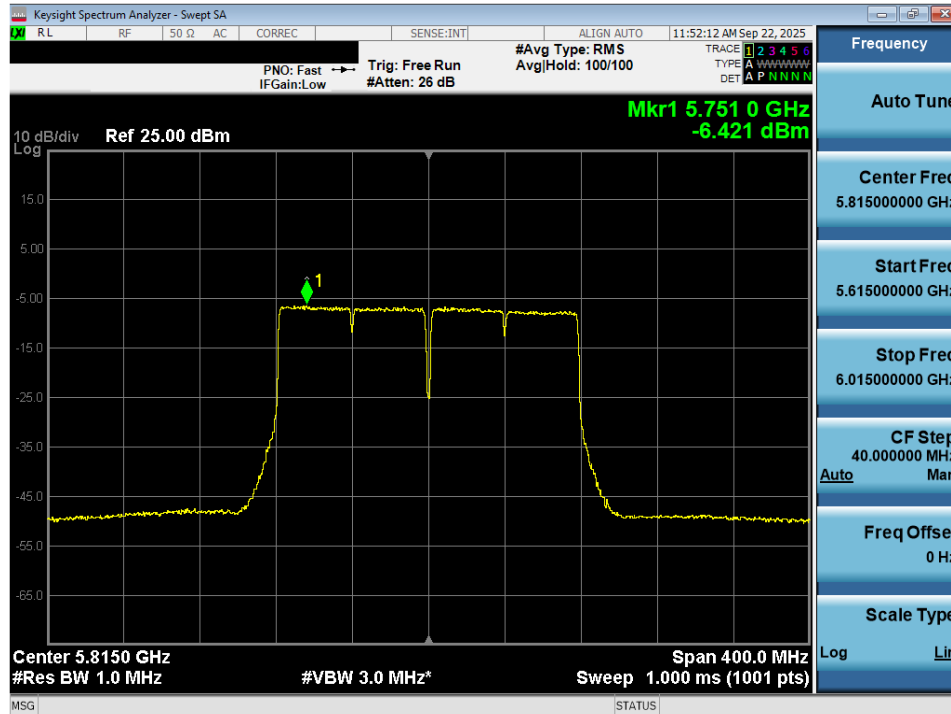

Plot 7-117. Power Spectral Density Plot MIMO ANT2 (160MHz BW 802.11ac (UNII Band 3/4) – Ch. 163)

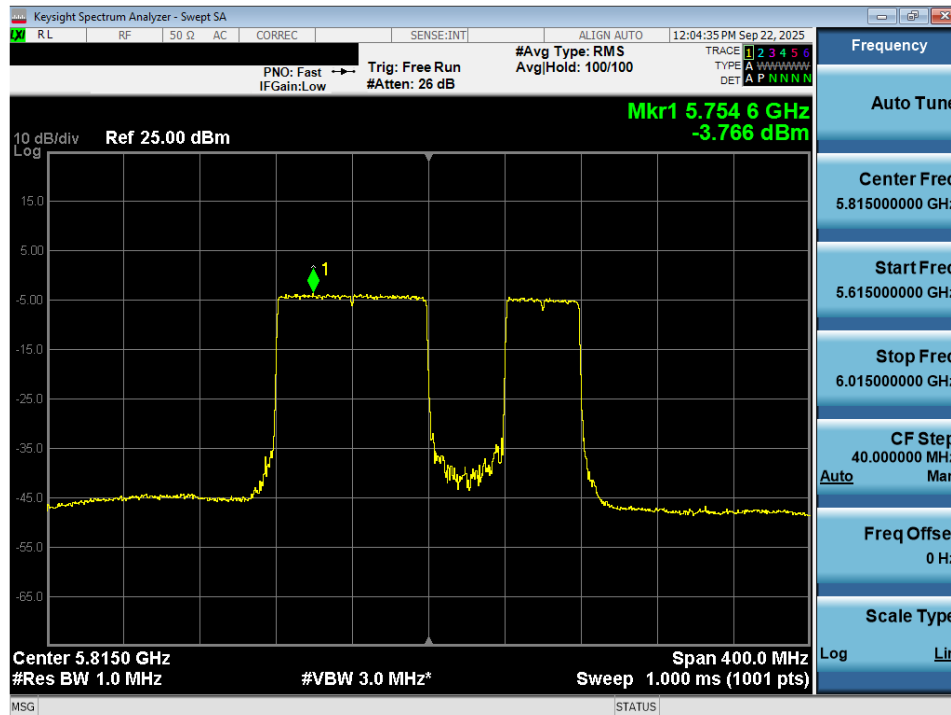

Plot 7-118. Power Spectral Density Plot MIMO ANT2 (160MHz BW 802.11be (40MHz Puncture) (UNII Band 3/4) – Ch. 163)

|                                            |                                  |                               |                                   |
|--------------------------------------------|----------------------------------|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS942B                         | MEASUREMENT REPORT               |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2508270084-16-R1.A3L | Test Dates:<br>9/2/25 - 12/30/25 | EUT Type:<br>Portable Handset | Page 95 of 144                    |

**Note:**

Per ANSI C63.10:2020 Section 14.5.2.2, the power spectral density at Antenna-1 and Antenna-2 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

**Sample MIMO Calculation:**

At 5180MHz in 802.11be (20MHz BW) mode, the average conducted power spectral density was measured to be 5.25 dBm for Antenna 1 and 5.77 dBm for Antenna 2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(5.25 \text{ dBm} + 5.77 \text{ dBm}) = (3.347 \text{ mW} + 3.774 \text{ mW}) = 7.121 \text{ mW} = 8.53 \text{ dBm}$$

**Sample e.i.r.p Power Spectral Density Calculation:**

At 5180MHz in 802.11be (20MHz BW) mode, the average MIMO power density was calculated to be 8.53 dBm with directional gain of -1.16 dBi.

$$\text{e.i.r.p. Power Spectral Density(dBm)} = \text{Power Spectral Density (dBm)} + \text{Ant gain (dBi)}$$

$$8.53 \text{ dBm} + -1.16 \text{ dBi} = 7.36 \text{ dBm}$$

|                                                   |                                         |                                      |                                          |
|---------------------------------------------------|-----------------------------------------|--------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMS942B                         | <b>MEASUREMENT REPORT</b>               |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2508270084-16-R1.A3L | <b>Test Dates:</b><br>9/2/25 - 12/30/25 | <b>EUT Type:</b><br>Portable Handset | Page 96 of 144                           |

## 7.6 Radiated Emission Measurements

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10:2020, and at the appropriate frequencies. All channels, modes, and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst-case emissions are reported in this section.

**For transmitters operating in the 5.15-5.25 GHz and 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.**

**For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.**

**For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.**

**For transmitters operating in the 5.850 – 5.895 GHz band: all emissions at or above 5.895GHz shall not exceed an e.i.r.p. of -5dBm/MHz and shall decrease linearly up to an e.i.r.p. of -27dBm/MHz at or above 5.925GHz, and all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27dBm/MHz at 5.65 GHz increasing linearly to 10dBm/MHz at 5.7GHz and from 5.7GHz increasing linearly to a level of 15.6dBm/MHz at 5.72GHz, and from 5.72GHz increasing linearly to a level of 27dBm/MHz at 5.725GHz.**

**All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in the table below per FCC §15.209 and RSS-Gen (8.9).**

| Frequency         | Field Strength<br>[μV/m] | Measured Distance<br>[Meters] |
|-------------------|--------------------------|-------------------------------|
| 0.009 – 0.490 MHz | 2400/F (kHz)             | 300                           |
| 0.490 – 1.705 MHz | 24000/F (kHz)            | 30                            |
| 1.705 – 30.00 MHz | 30                       | 30                            |
| 30.00 – 88.00 MHz | 100                      | 3                             |
| 88.00 – 216.0 MHz | 150                      | 3                             |
| 216.0 – 960.0 MHz | 200                      | 3                             |
| Above 960.0 MHz   | 500                      | 3                             |

**Table 7-31. Radiated Limits**

### Test Procedures Used

ANSI C63.10:2020 – Sections 12.7.7.2, 12.7.6, 12.7.5 (Radiated Spurious Emissions)

ANSI C63.10:2020 – Section 12.7.4.4 (Band Edge Measurements)

|                                                   |                                         |                                      |                                          |
|---------------------------------------------------|-----------------------------------------|--------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMS942B                         | <b>MEASUREMENT REPORT</b>               |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2508270084-16-R1.A3L | <b>Test Dates:</b><br>9/2/25 - 12/30/25 | <b>EUT Type:</b><br>Portable Handset | Page 97 of 144                           |

## **Test Settings – Above 1GHz**

### **Average Field Strength Measurements (Method AD – Average Detection)**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be  $\geq 2 \times \text{span}/\text{RBW}$ )
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces.

### **Peak Field Strength Measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize.

## **Test Settings – Below 1GHz**


### **Quasi-Peak Field Strength Measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize.


## **Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.


|                                                   |                                         |                                      |                                          |
|---------------------------------------------------|-----------------------------------------|--------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMS942B                         | <b>MEASUREMENT REPORT</b>               |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2508270084-16-R1.A3L | <b>Test Dates:</b><br>9/2/25 - 12/30/25 | <b>EUT Type:</b><br>Portable Handset | Page 98 of 144                           |

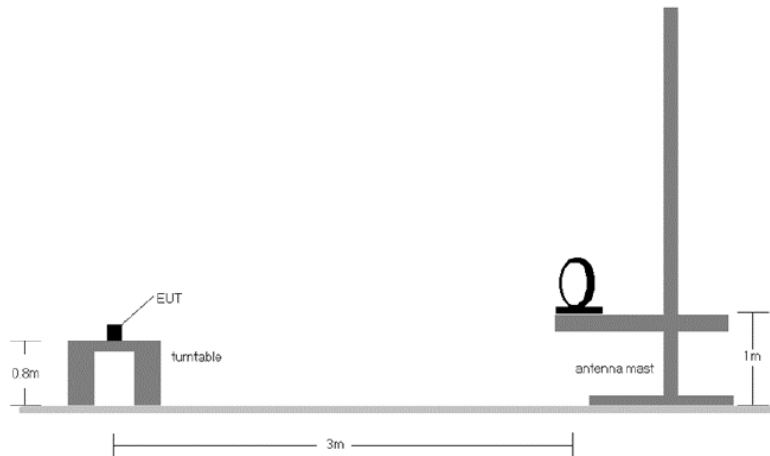

**Figure 7-5. Radiated Test Setup < 30MHz**

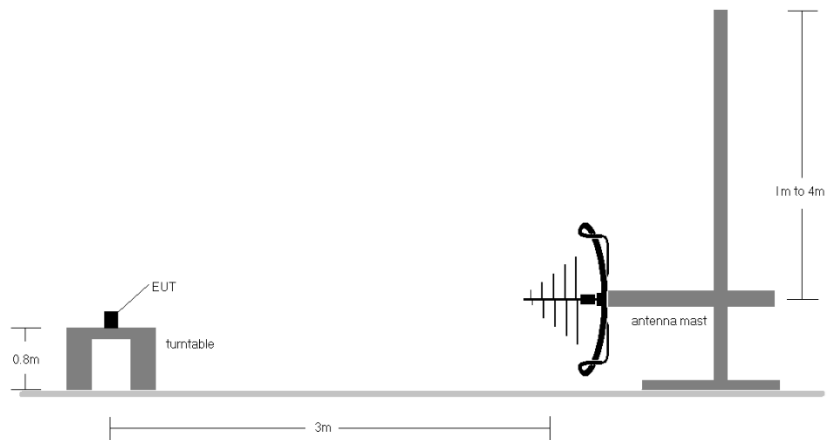

**Figure 7-6. Radiated Test Setup < 1GHz**

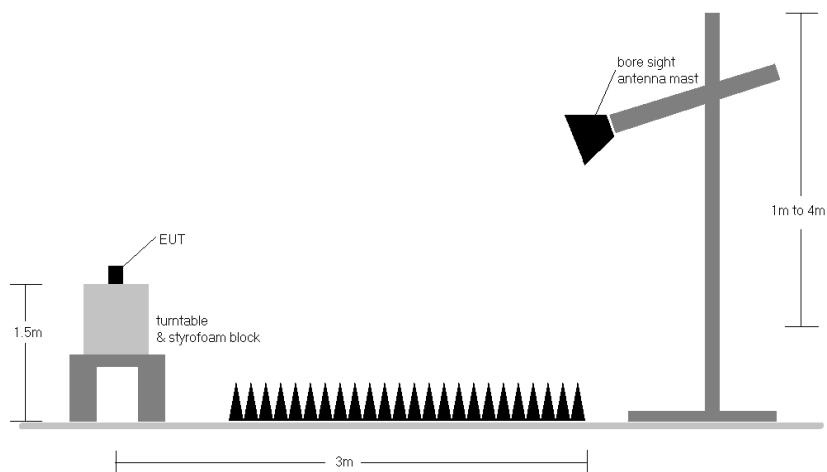

**Figure 7-7. Radiated Test Setup > 1GHz**

|                                                   |                                         |                                      |                                          |
|---------------------------------------------------|-----------------------------------------|--------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMS942B                         | <b>MEASUREMENT REPORT</b>               |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2508270084-16-R1.A3L | <b>Test Dates:</b><br>9/2/25 - 12/30/25 | <b>EUT Type:</b><br>Portable Handset | Page 99 of 144                           |

## Test Notes

1. All spurious emissions lying in restricted bands specified in §15.205 are below the limits shown in §15.209. All spurious emissions that do not lie in a restricted band are subject to an average limit of -27dBm/MHz. At 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB $\mu$ V/m.
2. All spurious emissions that do not lie in a restricted band are subject to a peak limit not to exceed 20dB of the average limit [68.2dB $\mu$ V/m]. If a peak measurement passes the average limit, it was determined no further investigation is necessary.
3. The antenna is manipulated through typical positions, polarity, and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported, however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3-meter test distance while emissions above 18GHz were measured at a 1-meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
9. In the case where a peak-detector measurement passed the given RMS limit it was determined sufficient to demonstrate compliance.
10. The results recorded using the broadband antenna are known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
11. In this section, plots showing measurements shown as "channel power" are recorded using the integration methods described in Section 11.12.3.2 of ANSI C63.10:2020 for average and peak measurements as allowed per Section 12.7.4.4.1. Also, the average measurements include the duty cycle correction factor shown in Section 2.2 of this report.

|                                                   |                                         |                                      |                                          |
|---------------------------------------------------|-----------------------------------------|--------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMS942B                         | <b>MEASUREMENT REPORT</b>               |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2508270084-16-R1.A3L | <b>Test Dates:</b><br>9/2/25 - 12/30/25 | <b>EUT Type:</b><br>Portable Handset | Page 100 of 144                          |

## **Sample Calculations**

### **Determining Spurious Emissions Levels**


- Field Strength Level  $_{\text{[dB}\mu\text{V/m]}} = \text{Analyzer Level}_{\text{[dBm]}} + 107 + \text{AFCL}_{\text{[dB/m]}}$
- $\text{AFCL}_{\text{[dB/m]}} = \text{Antenna Factor}_{\text{[dB/m]}} + \text{Cable Loss}_{\text{[dB]}}$
- $\text{Margin}_{\text{[dB]}} = \text{Field Strength Level}_{\text{[dB}\mu\text{V/m]}} - \text{Limit}_{\text{[dB}\mu\text{V/m]}}$

### **Radiated Band Edge Measurement Offset**


- The amplitude offset shown in the radiated restricted band edge plots was calculated using the formula:  
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

|                                                   |                                         |                                      |                                          |
|---------------------------------------------------|-----------------------------------------|--------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMS942B                         | <b>MEASUREMENT REPORT</b>               |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2508270084-16-R1.A3L | <b>Test Dates:</b><br>9/2/25 - 12/30/25 | <b>EUT Type:</b><br>Portable Handset | Page 101 of 144                          |


## 7.6.1 MIMO Radiated Spurious Emission Measurements

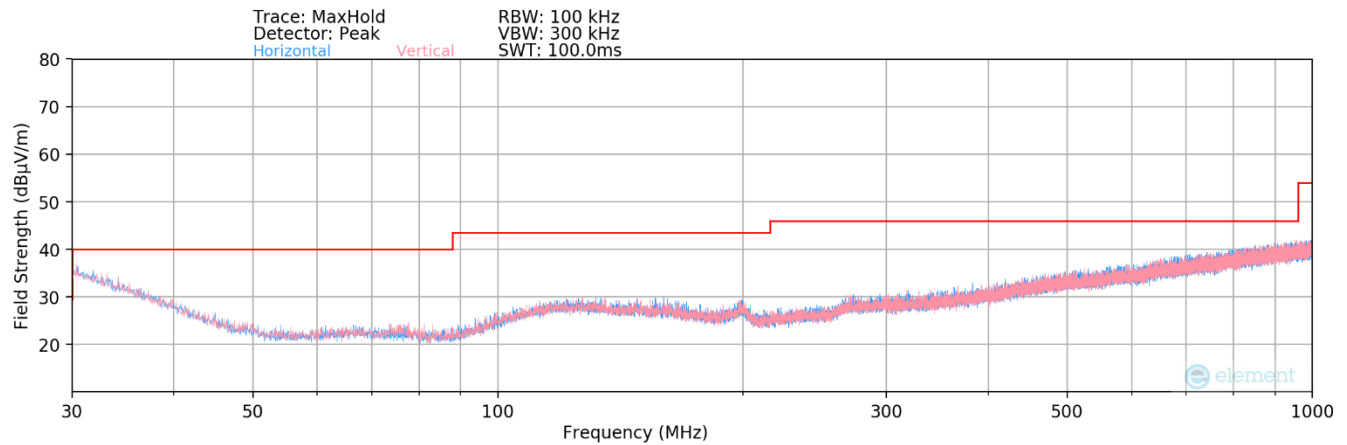

**Plot 7-119. Radiated Spurious Plot below 1GHz MIMO (802.11a)**

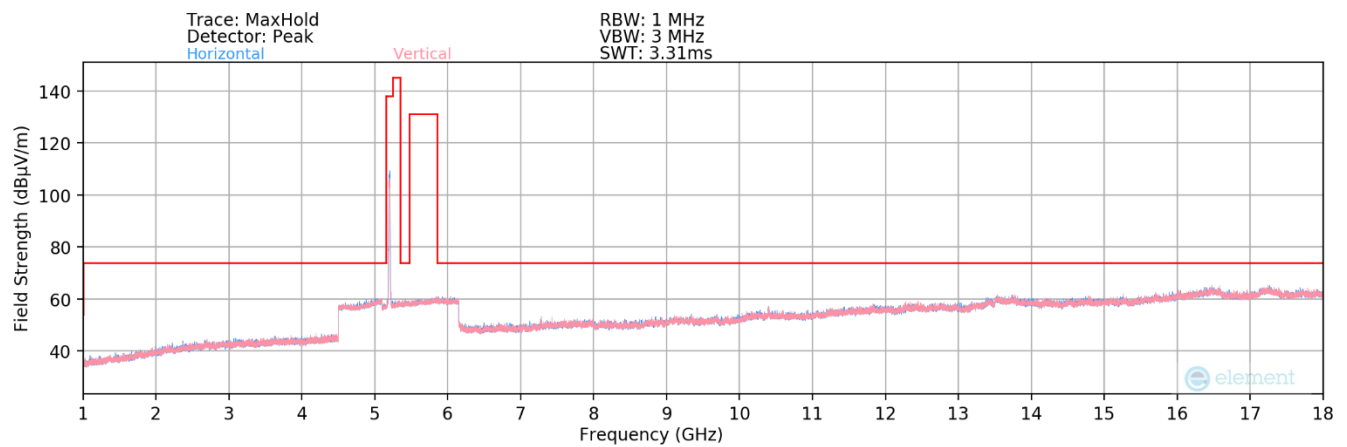


**Plot 7-120. Radiated Spurious Plot above 1GHz MIMO (802.11a – UNII Band 1 Ch. 40)**

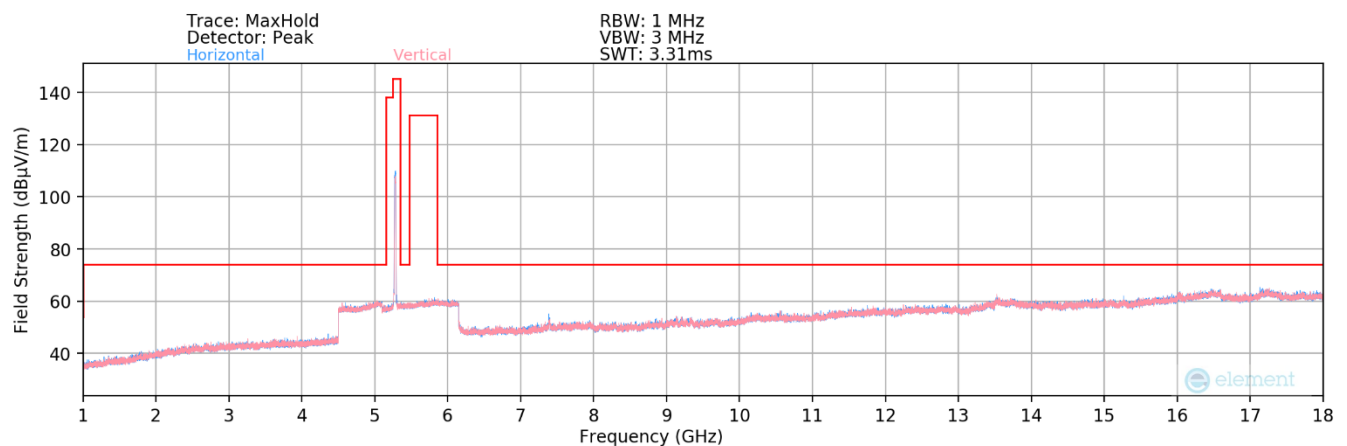


**Plot 7-121. Radiated Spurious Plot above 1GHz MIMO (802.11a – UNII Band 2A Ch. 56)**


|                                                   |                                         |                                      |                                          |
|---------------------------------------------------|-----------------------------------------|--------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMS942B                         | <b>MEASUREMENT REPORT</b>               |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2508270084-16-R1.A3L | <b>Test Dates:</b><br>9/2/25 - 12/30/25 | <b>EUT Type:</b><br>Portable Handset | Page 102 of 144                          |

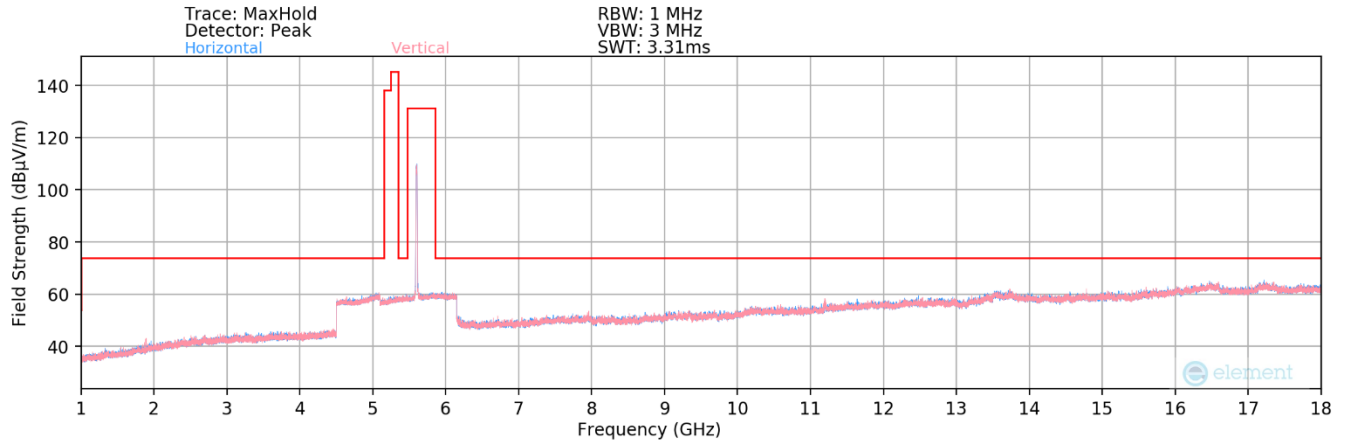

**Plot 7-122. Radiated Spurious Plot above 1GHz MIMO (802.11a – UNII Band 2C Ch. 120)**

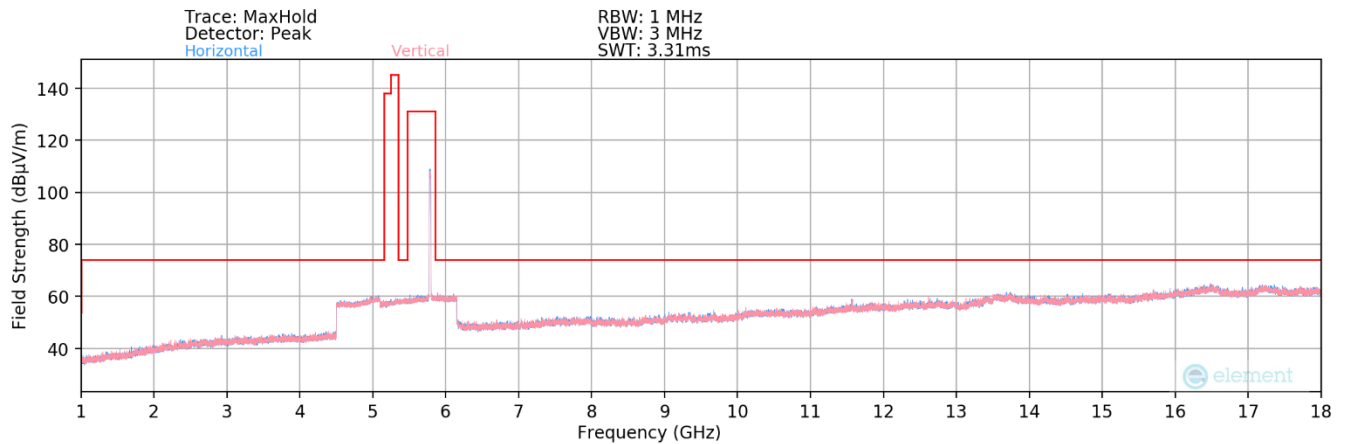


**Plot 7-123. Radiated Spurious Plot above 1GHz MIMO (802.11a – UNII Band 3 Ch. 157)**

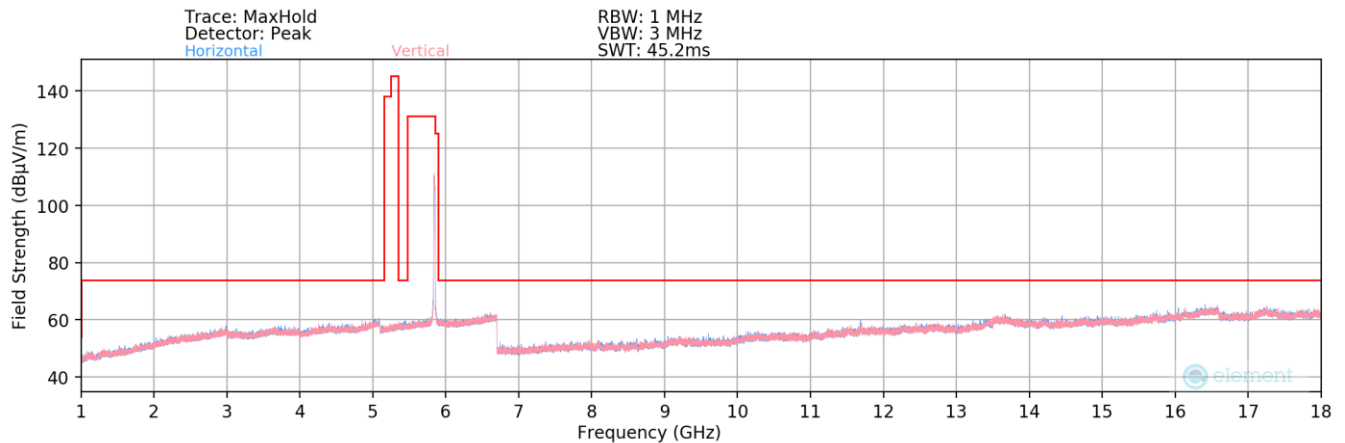


**Plot 7-124. Radiated Spurious Plot above 1GHz MIMO (802.11a – UNII Band 4 Ch. 173)**


|                                                   |                                         |                                      |                                          |
|---------------------------------------------------|-----------------------------------------|--------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMS942B                         | <b>MEASUREMENT REPORT</b>               |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2508270084-16-R1.A3L | <b>Test Dates:</b><br>9/2/25 - 12/30/25 | <b>EUT Type:</b><br>Portable Handset | Page 103 of 144                          |

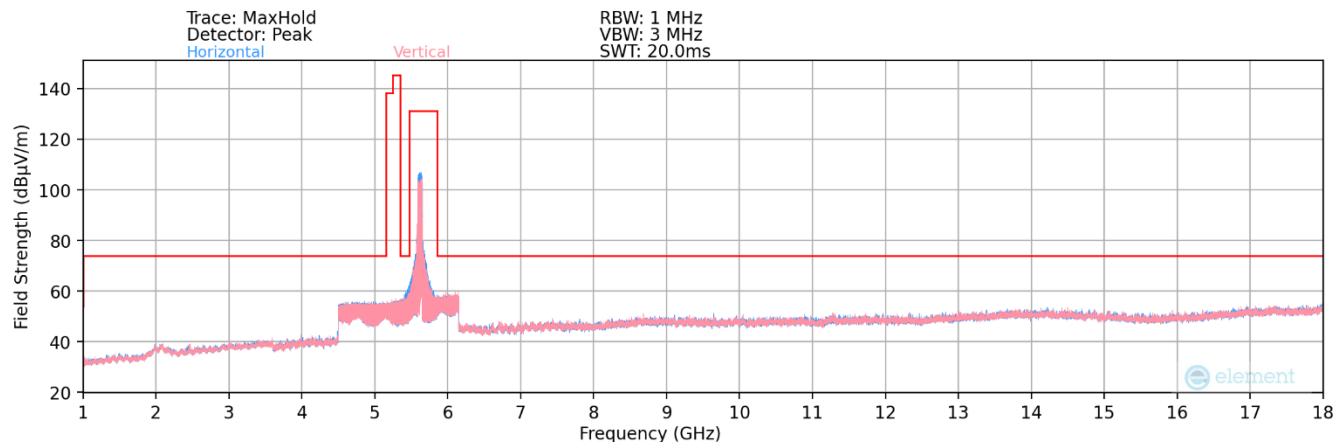

**Plot 7-125. Radiated Spurious Plot above 1GHz MIMO (802.11be – UNII Band 2C Ch. 122 – Punctured)**

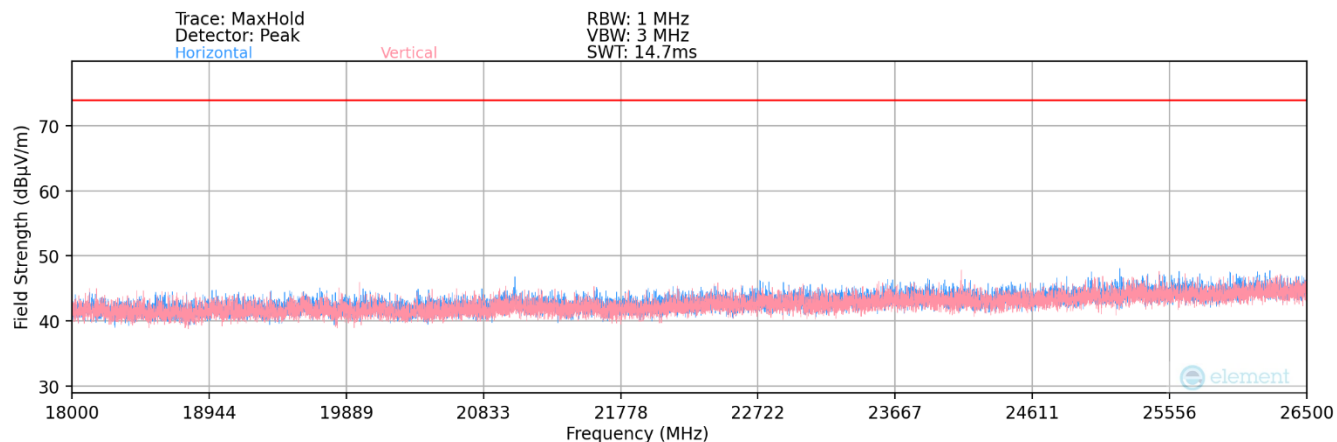

**Plot 7-126. Radiated Spurious Plot 18GHz – 26.5GHz MIMO (802.11a)**

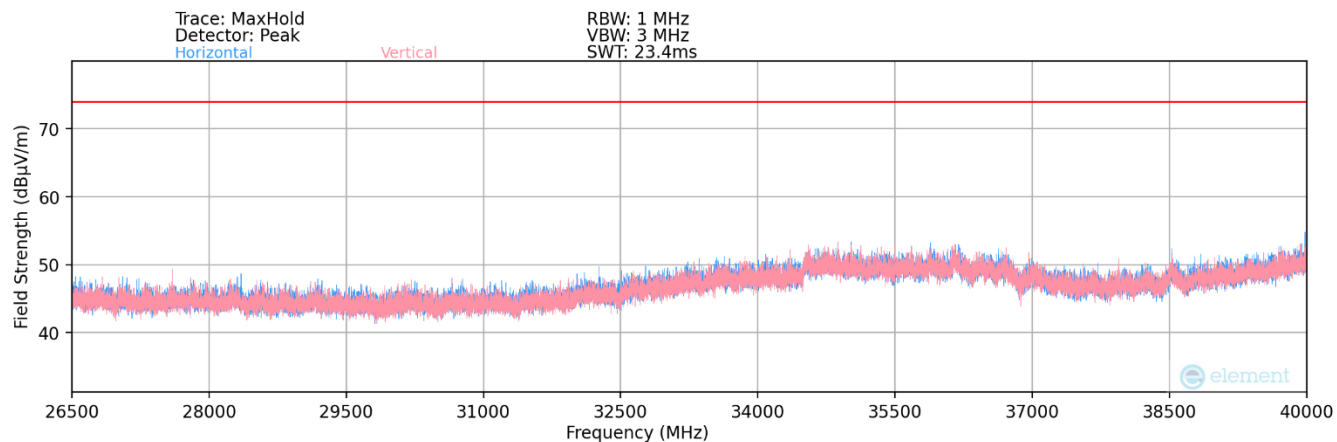

**Plot 7-127. Radiated Spurious Plot 26.5GHz – 40GHz MIMO (802.11a)**

|                                            |                                  |                               |                                   |
|--------------------------------------------|----------------------------------|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS942B                         | MEASUREMENT REPORT               |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2508270084-16-R1.A3L | Test Dates:<br>9/2/25 - 12/30/25 | EUT Type:<br>Portable Handset | Page 104 of 144                   |

## MIMO Radiated Spurious Emission Measurements – UNII Band 1

| Mode    | Antenna | UNII Band | Channel | Test Channel Freq. [MHz] | Restricted | Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|---------|---------|-----------|---------|--------------------------|------------|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 802.11a | MIMO    | 1         | 36      | 5180                     | *          | 7253.10         | Peak     | V               | 300                 | 34                         | -56.49               | 8.97        | 0.00                            | 59.48                   | 73.98          | -14.50      |
|         |         |           |         |                          | *          | 7253.10         | Average  | V               | 300                 | 34                         | -67.98               | 8.97        | 0.00                            | 47.99                   | 53.98          | -5.99       |
|         |         |           |         |                          |            | 10360.00        | Peak     | V               | 328                 | 25                         | -55.98               | 12.04       | 0.00                            | 63.06                   | 68.20          | -5.14       |
|         |         |           |         |                          | *          | 15540.00        | Average  | V               | -                   | -                          | -79.98               | 14.08       | 0.00                            | 41.10                   | 53.98          | -12.88      |
|         |         |           |         |                          | *          | 15540.00        | Peak     | V               | -                   | -                          | -68.22               | 14.08       | 0.00                            | 52.86                   | 73.98          | -21.12      |
|         |         |           |         |                          | *          | 20720.00        | Average  | V               | -                   | -                          | -60.42               | 2.48        | -9.54                           | 39.52                   | 53.98          | -14.46      |
|         |         |           |         |                          | *          | 20720.00        | Peak     | V               | -                   | -                          | -59.40               | 2.48        | -9.54                           | 40.54                   | 73.98          | -33.44      |
|         |         |           |         |                          |            | 25900.00        | Peak     | V               | -                   | -                          | -57.06               | 4.78        | -9.54                           | 45.18                   | 68.20          | -23.02      |
|         |         |           | 40      | 5200                     | *          | 7253.10         | Peak     | V               | 296                 | 29                         | -56.52               | 8.97        | 0.00                            | 59.45                   | 73.98          | -14.53      |
|         |         |           |         |                          | *          | 7253.10         | Average  | V               | 296                 | 29                         | -67.78               | 8.97        | 0.00                            | 48.19                   | 53.98          | -5.79       |
|         |         |           |         |                          |            | 10400.00        | Peak     | V               | -                   | -                          | -69.84               | 12.45       | 0.00                            | 49.61                   | 68.20          | -18.59      |
|         |         |           |         |                          | *          | 15600.00        | Average  | V               | -                   | -                          | -82.04               | 14.12       | 0.00                            | 39.08                   | 53.98          | -14.90      |
|         |         |           |         |                          | *          | 15600.00        | Peak     | V               | -                   | -                          | -70.44               | 14.12       | 0.00                            | 50.68                   | 73.98          | -23.30      |
|         |         |           |         |                          | *          | 20800.00        | Average  | V               | -                   | -                          | -57.25               | 2.52        | -9.54                           | 42.73                   | 53.98          | -11.25      |
|         |         |           |         |                          | *          | 20800.00        | Peak     | V               | -                   | -                          | -57.06               | 2.52        | -9.54                           | 42.92                   | 73.98          | -31.06      |
|         |         |           |         |                          |            | 26000.00        | Peak     | V               | -                   | -                          | -59.31               | 4.78        | -9.54                           | 42.94                   | 68.20          | -25.27      |
|         |         |           | 48      | 5240                     | *          | 7253.10         | Peak     | V               | 311                 | 38                         | -57.29               | 8.97        | 0.00                            | 58.68                   | 73.98          | -15.30      |
|         |         |           |         |                          | *          | 7253.10         | Average  | V               | 311                 | 38                         | -68.75               | 8.97        | 0.00                            | 47.22                   | 53.98          | -6.76       |
|         |         |           |         |                          |            | 10480.00        | Peak     | V               | -                   | -                          | -70.03               | 13.04       | 0.00                            | 50.01                   | 68.20          | -18.19      |
|         |         |           |         |                          | *          | 15720.00        | Average  | V               | -                   | -                          | -82.03               | 14.52       | 0.00                            | 39.49                   | 53.98          | -14.49      |
|         |         |           |         |                          | *          | 15720.00        | Peak     | V               | -                   | -                          | -70.27               | 14.52       | 0.00                            | 51.25                   | 73.98          | -22.73      |
|         |         |           |         |                          | *          | 20960.00        | Average  | V               | -                   | -                          | -60.14               | 2.84        | -9.54                           | 40.15                   | 53.98          | -13.83      |
|         |         |           |         |                          | *          | 20960.00        | Peak     | V               | -                   | -                          | -59.47               | 2.84        | -9.54                           | 40.82                   | 73.98          | -33.16      |
|         |         |           |         |                          |            | 26200.00        | Peak     | V               | -                   | -                          | -57.01               | 4.91        | -9.54                           | 45.36                   | 68.20          | -22.84      |

**Table 7-32. Radiated Measurements MIMO**

|                                                   |                                         |                                      |                                          |
|---------------------------------------------------|-----------------------------------------|--------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMS942B                         | <b>MEASUREMENT REPORT</b>               |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2508270084-16-R1.A3L | <b>Test Dates:</b><br>9/2/25 - 12/30/25 | <b>EUT Type:</b><br>Portable Handset | Page 105 of 144                          |

## MIMO Radiated Spurious Emission Measurements – UNII Band 2A

| Mode    | Antenna | UNII Band | Channel | Test Channel Freq. [MHz] | Restricted | Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|---------|---------|-----------|---------|--------------------------|------------|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 802.11a | MIMO    | 2A        | 52      | 5260                     | *          | 7253.10         | Peak     | V               | 298                 | 30                         | -56.19               | 8.97        | 0.00                            | 59.78                   | 73.98          | -14.20      |
|         |         |           |         |                          | *          | 7253.10         | Average  | V               | 298                 | 30                         | -67.75               | 8.97        | 0.00                            | 48.22                   | 53.98          | -5.76       |
|         |         |           |         |                          |            | 10520.00        | Peak     | V               | -                   | -                          | -69.39               | 13.01       | 0.00                            | 50.62                   | 68.20          | -17.58      |
|         |         |           |         |                          | *          | 15780.00        | Average  | V               | -                   | -                          | -82.33               | 14.41       | 0.00                            | 39.08                   | 53.98          | -14.90      |
|         |         |           |         |                          | *          | 15780.00        | Peak     | V               | -                   | -                          | -70.18               | 14.41       | 0.00                            | 51.23                   | 73.98          | -22.75      |
|         |         |           |         |                          | *          | 21040.00        | Average  | V               | -                   | -                          | -59.86               | 2.92        | -9.54                           | 40.52                   | 53.98          | -13.46      |
|         |         |           |         |                          | *          | 21040.00        | Peak     | V               | -                   | -                          | -58.99               | 2.92        | -9.54                           | 41.39                   | 73.98          | -32.59      |
|         |         |           |         |                          |            | 26300.00        | Peak     | V               | -                   | -                          | -56.96               | 4.91        | -9.54                           | 45.41                   | 68.20          | -22.79      |
|         |         |           | 56      | 5280                     | *          | 7253.10         | Peak     | V               | 310                 | 39                         | -56.50               | 8.97        | 0.00                            | 59.47                   | 73.98          | -14.51      |
|         |         |           |         |                          | *          | 7253.10         | Average  | V               | 310                 | 39                         | -68.83               | 8.97        | 0.00                            | 47.14                   | 53.98          | -6.84       |
|         |         |           |         |                          |            | 10560.00        | Peak     | V               | -                   | -                          | -69.82               | 12.82       | 0.00                            | 50.00                   | 68.20          | -18.20      |
|         |         |           |         |                          | *          | 15840.00        | Average  | V               | -                   | -                          | -81.71               | 14.10       | 0.00                            | 39.39                   | 53.98          | -14.59      |
|         |         |           |         |                          | *          | 15840.00        | Peak     | V               | -                   | -                          | -69.65               | 14.10       | 0.00                            | 51.45                   | 73.98          | -22.53      |
|         |         |           |         |                          | *          | 21120.00        | Average  | V               | -                   | -                          | -59.92               | 2.87        | -9.54                           | 40.41                   | 53.98          | -13.57      |
|         |         |           |         |                          | *          | 21120.00        | Peak     | V               | -                   | -                          | -58.96               | 2.87        | -9.54                           | 41.36                   | 73.98          | -32.62      |
|         |         |           |         |                          |            | 26400.00        | Peak     | V               | -                   | -                          | -56.85               | 4.85        | -9.54                           | 45.46                   | 68.20          | -22.74      |
|         |         |           | 64      | 5320                     | *          | 7253.10         | Average  | V               | 298                 | 30                         | -68.54               | 8.97        | 0.00                            | 47.43                   | 53.98          | -6.55       |
|         |         |           |         |                          | *          | 7253.10         | Peak     | V               | 298                 | 30                         | -57.54               | 8.97        | 0.00                            | 58.43                   | 73.98          | -15.55      |
|         |         |           |         |                          | *          | 10640.00        | Average  | V               | -                   | -                          | -81.15               | 12.81       | 0.00                            | 38.66                   | 53.98          | -15.32      |
|         |         |           |         |                          | *          | 10640.00        | Peak     | V               | -                   | -                          | -68.89               | 12.81       | 0.00                            | 50.92                   | 73.98          | -23.06      |
|         |         |           |         |                          | *          | 15960.00        | Average  | V               | -                   | -                          | -82.44               | 15.15       | 0.00                            | 39.71                   | 53.98          | -14.27      |
|         |         |           |         |                          | *          | 15960.00        | Peak     | V               | -                   | -                          | -70.89               | 15.15       | 0.00                            | 51.26                   | 73.98          | -22.72      |
|         |         |           |         |                          | *          | 21280.00        | Average  | V               | -                   | -                          | -60.07               | 2.96        | -9.54                           | 40.35                   | 53.98          | -13.63      |
|         |         |           |         |                          | *          | 21280.00        | Peak     | V               | -                   | -                          | -59.64               | 2.96        | -9.54                           | 40.78                   | 73.98          | -33.20      |
|         |         |           |         |                          |            | 26600.00        | Peak     | V               | -                   | -                          | -56.68               | 5.05        | -9.54                           | 45.83                   | 68.20          | -22.37      |

**Table 7-33. Radiated Measurements MIMO**

|                                                   |                                         |                                      |                                          |
|---------------------------------------------------|-----------------------------------------|--------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMS942B                         | <b>MEASUREMENT REPORT</b>               |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2508270084-16-R1.A3L | <b>Test Dates:</b><br>9/2/25 - 12/30/25 | <b>EUT Type:</b><br>Portable Handset | Page 106 of 144                          |

## MIMO Radiated Spurious Emission Measurements – UNII Band 2C

| Mode    | Antenna | UNII Band | Channel | Test Channel Freq. [MHz] | Restricted | Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|---------|---------|-----------|---------|--------------------------|------------|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 802.11a | MIMO    | 2C        | 100     | 5500                     | *          | 11000.00        | Average  | V               | -                   | -                          | -82.28               | 12.47       | 0.00                            | 37.19                   | 53.98          | -16.79      |
|         |         |           |         |                          | *          | 11000.00        | Peak     | V               | -                   | -                          | -70.55               | 12.47       | 0.00                            | 48.92                   | 73.98          | -25.06      |
|         |         |           |         |                          |            | 16500.00        | Peak     | V               | -                   | -                          | -72.37               | 15.62       | -9.54                           | 40.71                   | 68.20          | -27.49      |
|         |         |           |         |                          |            | 22000.00        | Peak     | V               | -                   | -                          | -59.12               | 3.01        | -9.54                           | 41.35                   | 68.20          | -26.85      |
|         |         |           |         |                          |            | 27500.00        | Peak     | V               | -                   | -                          | -56.89               | 5.00        | -9.54                           | 45.57                   | 68.20          | -22.63      |
|         |         |           | 120     | 5600                     | *          | 11200.00        | Average  | V               | -                   | -                          | -82.73               | 12.60       | 0.00                            | 36.87                   | 53.98          | -17.11      |
|         |         |           |         |                          | *          | 11200.00        | Peak     | V               | -                   | -                          | -70.97               | 12.60       | 0.00                            | 48.63                   | 73.98          | -25.35      |
|         |         |           |         |                          |            | 16800.00        | Peak     | V               | -                   | -                          | -72.84               | 16.11       | 0.00                            | 50.27                   | 68.20          | -17.93      |
|         |         |           |         |                          | *          | 22400.00        | Average  | V               | -                   | -                          | -59.31               | 3.44        | -9.54                           | 41.59                   | 53.98          | -12.39      |
|         |         |           |         |                          | *          | 22400.00        | Peak     | V               | -                   | -                          | -58.63               | 3.44        | -9.54                           | 42.28                   | 73.98          | -31.70      |
|         |         |           | 144     | 5720                     |            | 28000.00        | Peak     | V               | -                   | -                          | -56.85               | 5.31        | -9.54                           | 45.92                   | 68.20          | -22.28      |
|         |         |           |         |                          | *          | 11440.00        | Average  | V               | -                   | -                          | -83.27               | 13.48       | 0.00                            | 37.21                   | 53.98          | -16.77      |
|         |         |           |         |                          | *          | 11440.00        | Peak     | V               | -                   | -                          | -72.15               | 13.48       | 0.00                            | 48.33                   | 73.98          | -25.65      |
|         |         |           |         |                          |            | 17160.00        | Peak     | V               | -                   | -                          | -72.33               | 16.71       | 0.00                            | 51.38                   | 68.20          | -16.82      |
|         |         |           |         |                          | *          | 22880.00        | Average  | V               | -                   | -                          | -59.24               | 3.60        | -9.54                           | 41.83                   | 53.98          | -12.15      |
|         |         |           |         |                          | *          | 22880.00        | Peak     | V               | -                   | -                          | -58.56               | 3.60        | -9.54                           | 42.50                   | 73.98          | -31.48      |
|         |         |           |         |                          |            | 28600.00        | Peak     | V               | -                   | -                          | -58.56               | 5.30        | -9.54                           | 44.21                   | 68.20          | -23.99      |

**Table 7-34. Radiated Measurements MIMO**

|                                                   |                                         |                                      |                                          |
|---------------------------------------------------|-----------------------------------------|--------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMS942B                         | <b>MEASUREMENT REPORT</b>               |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2508270084-16-R1.A3L | <b>Test Dates:</b><br>9/2/25 - 12/30/25 | <b>EUT Type:</b><br>Portable Handset | Page 107 of 144                          |

## MIMO Radiated Spurious Emission Measurements – UNII Band 3

| Mode    | Antenna | UNII Band | Channel | Test Channel Freq. [MHz] | Restricted | Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|---------|---------|-----------|---------|--------------------------|------------|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 802.11a | MIMO    | 3         | 149     | 5745                     | *          | 11490.00        | Average  | V               | -                   | -                          | -82.80               | 13.01       | 0.00                            | 37.21                   | 53.98          | -16.77      |
|         |         |           |         |                          | *          | 11490.00        | Peak     | V               | -                   | -                          | -72.03               | 13.01       | 0.00                            | 47.98                   | 73.98          | -26.00      |
|         |         |           |         |                          |            | 17235.00        | Peak     | V               | -                   | -                          | -71.83               | 16.91       | 0.00                            | 52.08                   | 68.20          | -16.12      |
|         |         |           |         |                          | *          | 22980.00        | Average  | V               | -                   | -                          | -58.42               | 3.63        | -9.54                           | 42.66                   | 53.98          | -11.32      |
|         |         |           |         |                          | *          | 22980.00        | Peak     | V               | -                   | -                          | -58.75               | 3.63        | -9.54                           | 42.34                   | 73.98          | -31.64      |
|         |         |           |         |                          |            | 28725.00        | Peak     | V               | -                   | -                          | -57.84               | 5.24        | -9.54                           | 44.86                   | 68.20          | -23.34      |
|         |         |           | 157     | 5785                     | *          | 11570.00        | Average  | V               | -                   | -                          | -82.48               | 13.03       | 0.00                            | 37.55                   | 53.98          | -16.43      |
|         |         |           |         |                          | *          | 11570.00        | Peak     | V               | -                   | -                          | -71.72               | 13.03       | 0.00                            | 48.31                   | 73.98          | -25.67      |
|         |         |           |         |                          |            | 17355.00        | Peak     | V               | -                   | -                          | -73.07               | 17.67       | 0.00                            | 51.60                   | 68.20          | -16.60      |
|         |         |           |         |                          |            | 23140.00        | Peak     | V               | -                   | -                          | -58.48               | 3.75        | -9.54                           | 42.73                   | 68.20          | -25.47      |
|         |         |           |         |                          |            | 28925.00        | Peak     | V               | -                   | -                          | -57.63               | 5.12        | -9.54                           | 44.95                   | 68.20          | -23.25      |
|         |         |           | 165     | 5825                     | *          | 11650.00        | Average  | V               | -                   | -                          | -83.13               | 13.41       | 0.00                            | 37.28                   | 53.98          | -16.70      |
|         |         |           |         |                          | *          | 11650.00        | Peak     | V               | -                   | -                          | -70.93               | 13.41       | 0.00                            | 49.48                   | 73.98          | -24.50      |
|         |         |           |         |                          |            | 17475.00        | Peak     | V               | -                   | -                          | -72.86               | 16.84       | 0.00                            | 50.98                   | 68.20          | -17.22      |
|         |         |           |         |                          |            | 23300.00        | Peak     | V               | -                   | -                          | -58.43               | 3.73        | -9.54                           | 42.76                   | 68.20          | -25.44      |
|         |         |           |         |                          |            | 29125.00        | Peak     | V               | -                   | -                          | -57.59               | 5.23        | -9.54                           | 45.10                   | 68.20          | -23.10      |

**Table 7-35. Radiated Measurements MIMO**

|                                                   |                                         |                                      |                                          |
|---------------------------------------------------|-----------------------------------------|--------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMS942B                         | <b>MEASUREMENT REPORT</b>               |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2508270084-16-R1.A3L | <b>Test Dates:</b><br>9/2/25 - 12/30/25 | <b>EUT Type:</b><br>Portable Handset | Page 108 of 144                          |



## MIMO Radiated Spurious Emission Measurements – UNII Band 4

| Mode    | Antenna | UNII Band | Channel | Test Channel Freq. [MHz] | Restricted | Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|---------|---------|-----------|---------|--------------------------|------------|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 802.11a | MIMO    | 4         | 169     | 5845                     | *          | 11150.00        | Average  | V               | -                   | -                          | -81.28               | 12.58       | 0.00                            | 38.30                   | 53.98          | -15.68      |
|         |         |           |         |                          | *          | 11150.00        | Peak     | V               | -                   | -                          | -69.31               | 12.58       | 0.00                            | 50.27                   | 73.98          | -23.71      |
|         |         |           |         |                          | *          | 11690.00        | Average  | V               | -                   | -                          | -81.52               | 13.27       | 0.00                            | 38.75                   | 53.98          | -15.23      |
|         |         |           |         |                          | *          | 11690.00        | Peak     | V               | -                   | -                          | -69.78               | 13.27       | 0.00                            | 50.49                   | 73.98          | -23.49      |
|         |         |           |         |                          |            | 17535.00        | Peak     | V               | -                   | -                          | -70.29               | 17.37       | 0.00                            | 54.08                   | 68.20          | -14.12      |
|         |         |           |         |                          |            | 23380.00        | Peak     | V               | -                   | -                          | -58.52               | 3.80        | -9.54                           | 42.75                   | 68.20          | -25.45      |
|         |         |           | 173     | 5865                     |            | 29225.00        | Peak     | V               | -                   | -                          | -57.60               | 5.22        | -9.54                           | 45.08                   | 68.20          | -23.12      |
|         |         |           |         |                          | *          | 11730.00        | Average  | V               | -                   | -                          | -81.99               | 14.39       | 0.00                            | 39.40                   | 53.98          | -14.58      |
|         |         |           |         |                          | *          | 11730.00        | Peak     | V               | -                   | -                          | -69.75               | 14.39       | 0.00                            | 51.64                   | 73.98          | -22.34      |
|         |         |           |         |                          |            | 17595.00        | Peak     | V               | -                   | -                          | -70.17               | 17.00       | 0.00                            | 53.83                   | 68.20          | -14.37      |
|         |         |           |         |                          |            | 23460.00        | Peak     | V               | -                   | -                          | -58.25               | 3.86        | -9.54                           | 43.08                   | 68.20          | -25.12      |
|         |         |           |         |                          |            | 29325.00        | Peak     | V               | -                   | -                          | -57.79               | 5.14        | -9.54                           | 44.82                   | 68.20          | -23.38      |
|         |         |           | 177     | 5885                     | *          | 11770.00        | Average  | V               | -                   | -                          | -82.79               | 13.93       | 0.00                            | 38.14                   | 53.98          | -15.84      |
|         |         |           |         |                          | *          | 11770.00        | Peak     | V               | -                   | -                          | -71.42               | 13.93       | 0.00                            | 49.51                   | 73.98          | -24.47      |
|         |         |           |         |                          |            | 17655.00        | Peak     | V               | -                   | -                          | -72.78               | 16.89       | 0.00                            | 51.11                   | 68.20          | -17.09      |
|         |         |           |         |                          |            | 23540.00        | Peak     | V               | 1                   | 172                        | -57.20               | 4.01        | -9.54                           | 44.26                   | 68.20          | -23.94      |
|         |         |           |         |                          |            | 29425.00        | Peak     | V               | -                   | -                          | -57.84               | 5.11        | -9.54                           | 44.72                   | 68.20          | -23.48      |

Table 7-36. Radiated Measurements MIMO

|                                            |                                  |                               |                                   |
|--------------------------------------------|----------------------------------|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS942B                         | MEASUREMENT REPORT               |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2508270084-16-R1.A3L | Test Dates:<br>9/2/25 - 12/30/25 | EUT Type:<br>Portable Handset | Page 109 of 144                   |


## MIMO Radiated Spurious Emission Measurements – With WCP

| Mode    | Antenna | UNII Band | Channel | Test Channel Freq. [MHz] | Restricted | Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|---------|---------|-----------|---------|--------------------------|------------|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 802.11a | MIMO    | 1         | 40      | 5200                     | *          | 10400.00        | Average  | V               | 203                 | 35                         | -69.99               | 8.18        | 45.19                   | 53.98          | -8.79       |
|         |         |           |         |                          | *          | 10400.00        | Peak     | V               | 203                 | 35                         | -58.09               | 8.18        | 57.09                   | 73.98          | -16.89      |


**Table 7-37. Radiated Measurements MIMO with WCP**

|                                                   |                                         |                                      |                                          |
|---------------------------------------------------|-----------------------------------------|--------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMS942B                         | <b>MEASUREMENT REPORT</b>               |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2508270084-16-R1.A3L | <b>Test Dates:</b><br>9/2/25 - 12/30/25 | <b>EUT Type:</b><br>Portable Handset | Page 110 of 144                          |


## Simultaneous Transmission – 2.4GHz + 5GHz

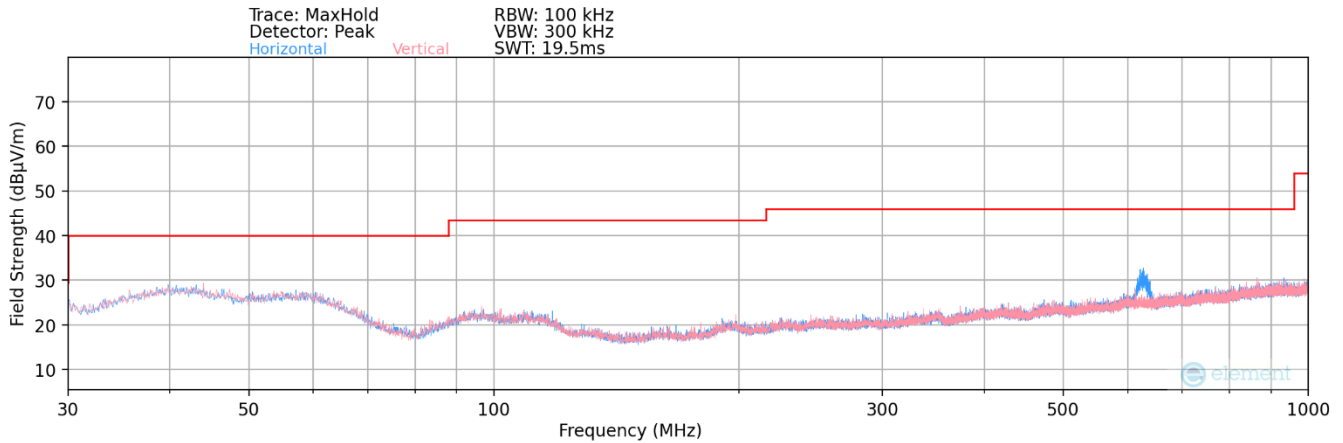

Plot 7-128. Radiated Spurious Plot below 1GHz MIMO 802.11g (2.4GHz – Ch. 6) + MIMO 802.11a (5GHz – Ch. 120)

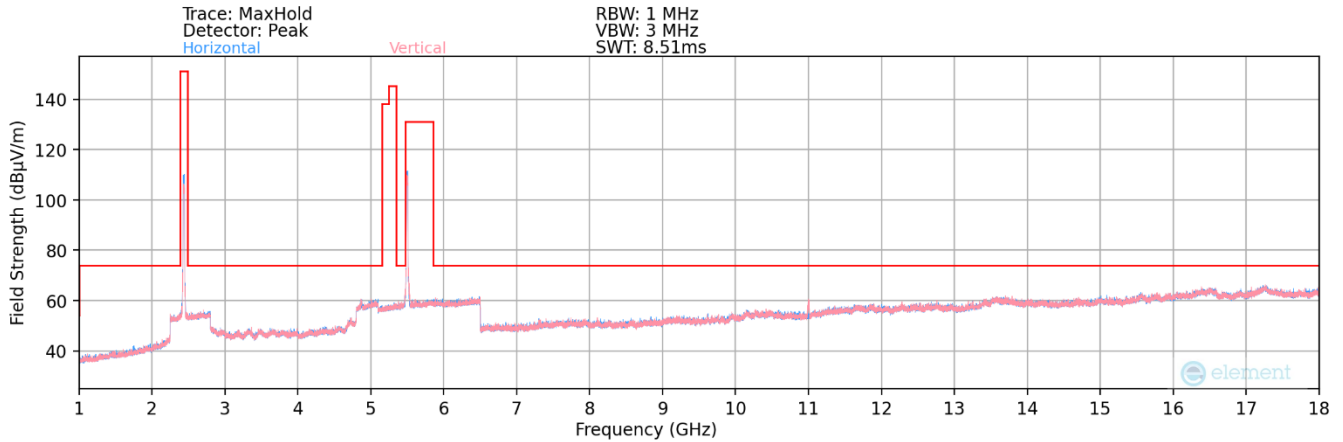


Plot 7-129. Radiated Spurious Plot below 1-18GHz MIMO 802.11g (2.4GHz – Ch.6) + MIMO 802.11a (5GHz – Ch. 120)

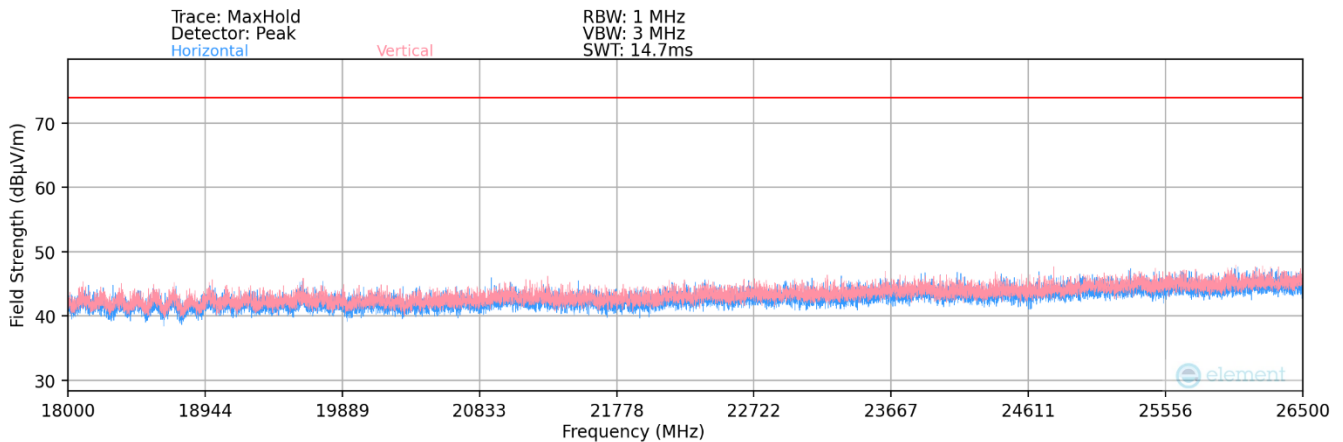

Plot 7-130. Radiated Spurious Plot below 18-26.5GHz MIMO 802.11g (2.4GHz – Ch.6) + MIMO 802.11a (5GHz – Ch. 120)

|                                            |                                  |                               |                                   |
|--------------------------------------------|----------------------------------|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS942B                         | MEASUREMENT REPORT               |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2508270084-16-R1.A3L | Test Dates:<br>9/2/25 - 12/30/25 | EUT Type:<br>Portable Handset | Page 111 of 144                   |

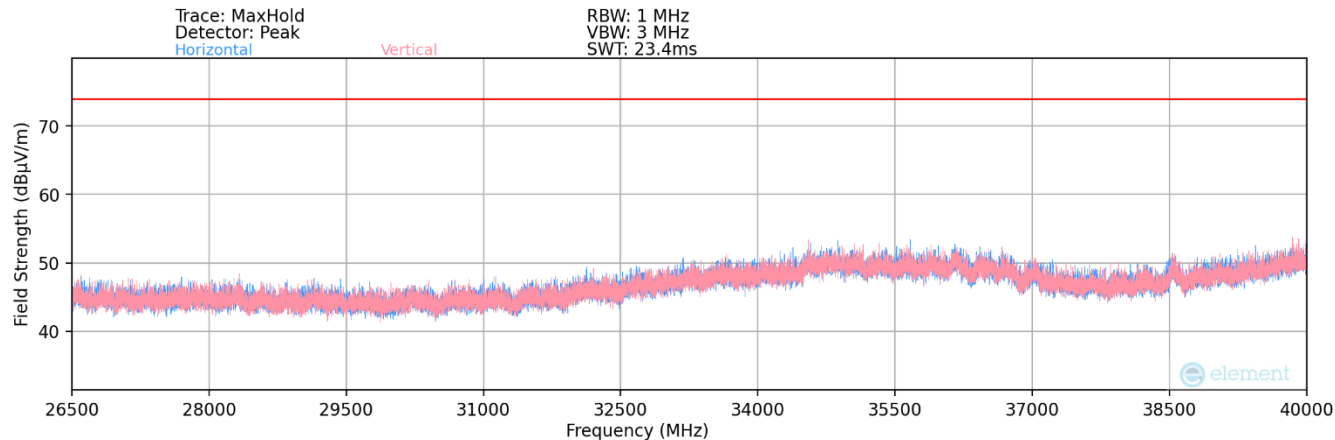

Plot 7-131. Radiated Spurious Plot below 26.5-40GHz MIMO 802.11g (2.4GHz – Ch.6) + MIMO 802.11a (5GHz – Ch. 120)


| Frequency [MHz] | Detector   | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|------------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 626.00          | Quasi-Peak | H               | 162                 | 123                        | -67.57               | -4.36       | 35.07                   | 46.02          | -10.95      |
| 3063.00         | Peak       | H               | -                   | -                          | -67.69               | 6.20        | 45.51                   | 73.98          | -28.47      |
| 8563.00         | Peak       | H               | -                   | -                          | -71.95               | 17.53       | 52.58                   | 73.98          | -21.40      |
| 12811.00        | Peak       | H               | -                   | -                          | -72.34               | 24.71       | 59.37                   | 73.98          | -14.61      |

Table 7-38. Radiated Measurements MIMO 2.4GHz + MIMO 5GHz


|                                            |                                  |                               |                                   |
|--------------------------------------------|----------------------------------|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS942B                         | MEASUREMENT REPORT               |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2508270084-16-R1.A3L | Test Dates:<br>9/2/25 - 12/30/25 | EUT Type:<br>Portable Handset | Page 112 of 144                   |

## 7.6.2 MIMO Radiated Band Edge Measurements (20MHz BW)

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11a  |
| Worst Case Transfer Rate: | 6Mbps    |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5180MHz  |
| Channel:                  | 36       |

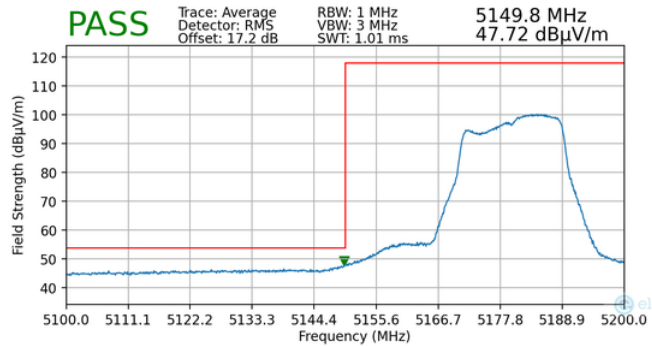


**Plot 7-132. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1)**

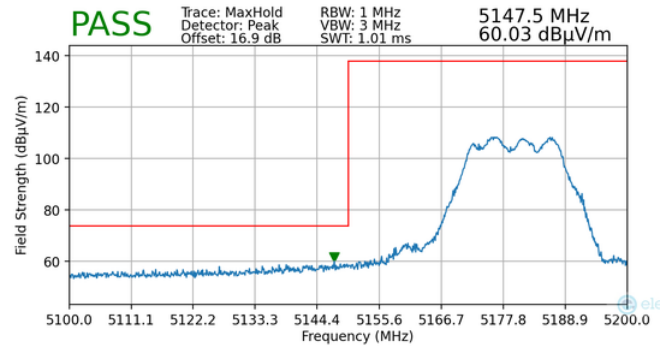


**Plot 7-133. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1)**

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11a  |
| Worst Case Transfer Rate: | 6Mbps    |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5320MHz  |
| Channel:                  | 64       |

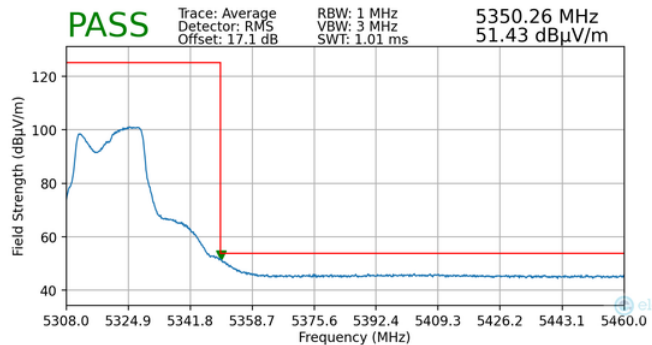


**Plot 7-134. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A)**

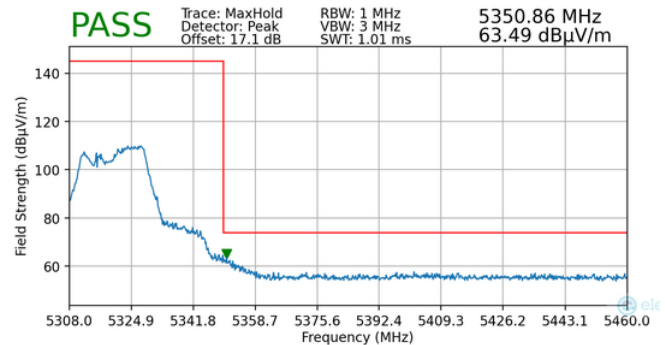


**Plot 7-135. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A)**

|                                                   |                                         |                                      |                                          |
|---------------------------------------------------|-----------------------------------------|--------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMS942B                         | <b>MEASUREMENT REPORT</b>               |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2508270084-16-R1.A3L | <b>Test Dates:</b><br>9/2/25 - 12/30/25 | <b>EUT Type:</b><br>Portable Handset | Page 113 of 144                          |

Worst Case Mode: 802.11be  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5500MHz  
 Channel: 100

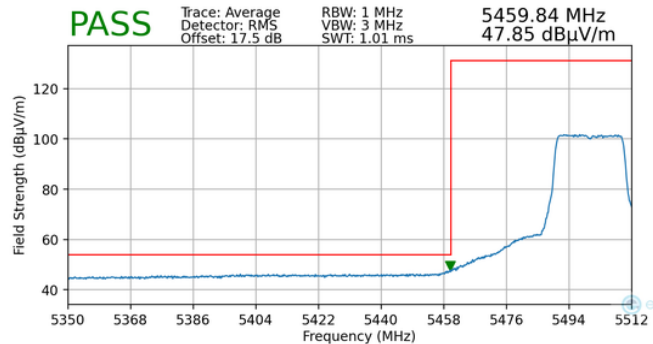


**Plot 7-136. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C)**

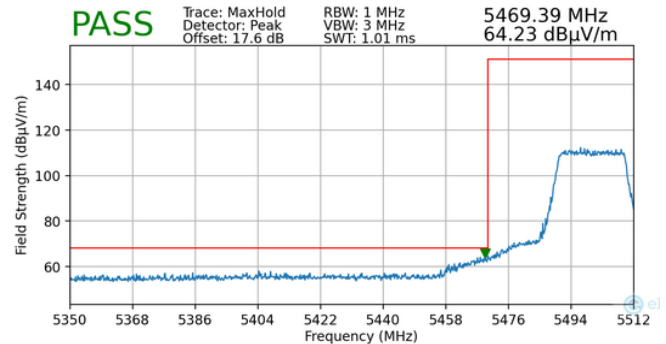

**Plot 7-137. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C)**


Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165

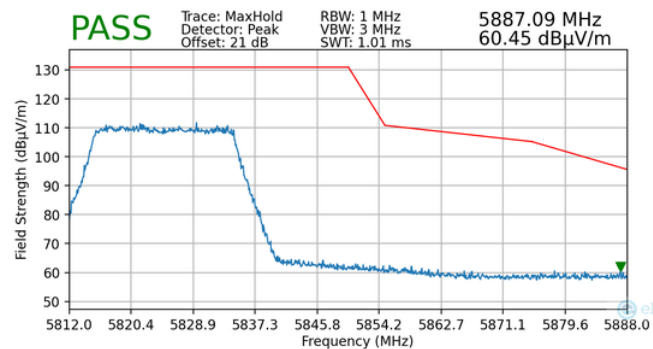

**Plot 7-138. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 3)**


|                                            |                                  |                               |                                   |
|--------------------------------------------|----------------------------------|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS942B                         | MEASUREMENT REPORT               |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2508270084-16-R1.A3L | Test Dates:<br>9/2/25 - 12/30/25 | EUT Type:<br>Portable Handset | Page 114 of 144                   |

Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5845MHz  
 Channel: 169

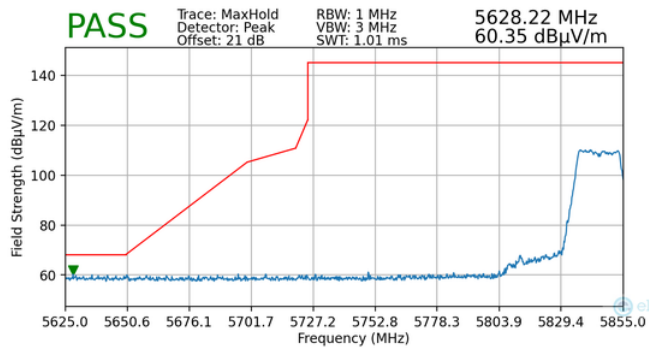


**Plot 7-139. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 4)**

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5885MHz  
 Channel: 177

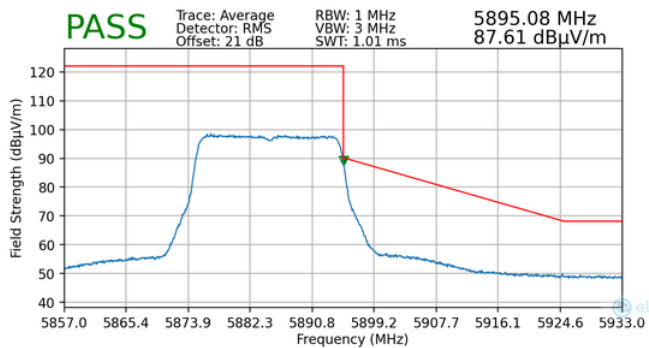

**Plot 7-140. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 4)**

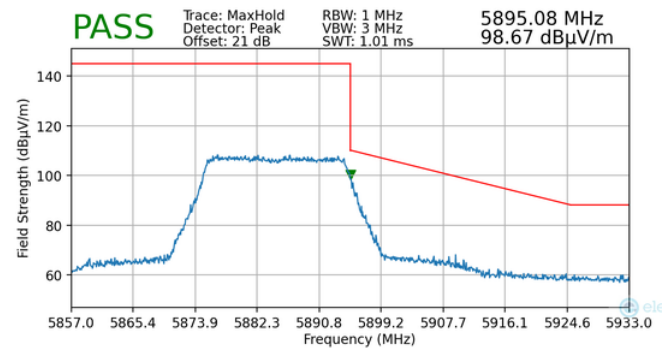


**Plot 7-141. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 4)**


|                                            |                                  |                               |                                   |
|--------------------------------------------|----------------------------------|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS942B                         | MEASUREMENT REPORT               |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2508270084-16-R1.A3L | Test Dates:<br>9/2/25 - 12/30/25 | EUT Type:<br>Portable Handset | Page 115 of 144                   |

### 7.6.3 MIMO Radiated Band Edge Measurements (40MHz BW)

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ax |
| Worst Case Transfer Rate: | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5190MHz  |
| Channel:                  | 38       |

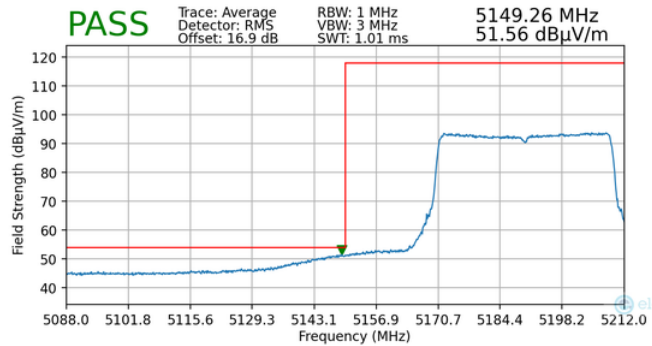


**Plot 7-142. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1)**

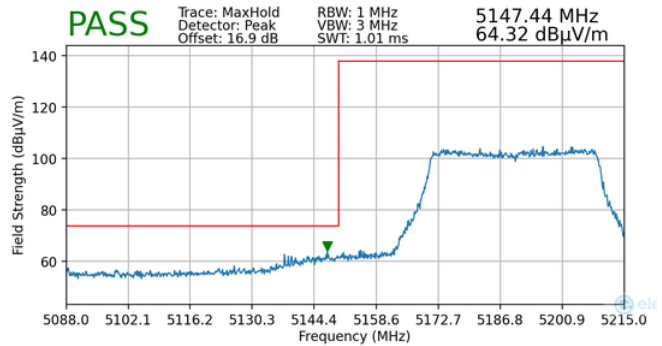


**Plot 7-143. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1)**

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ac |
| Worst Case Transfer Rate: | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5310MHz  |
| Channel:                  | 62       |

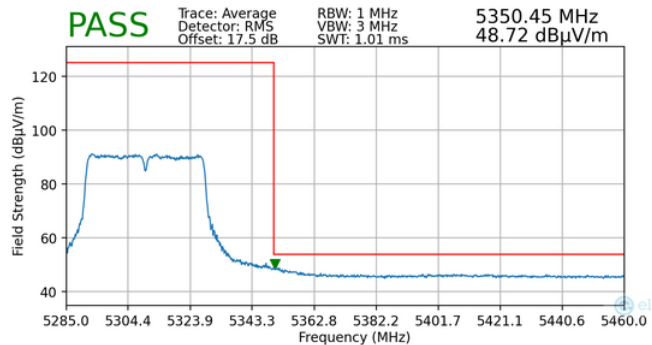


**Plot 7-144. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A)**

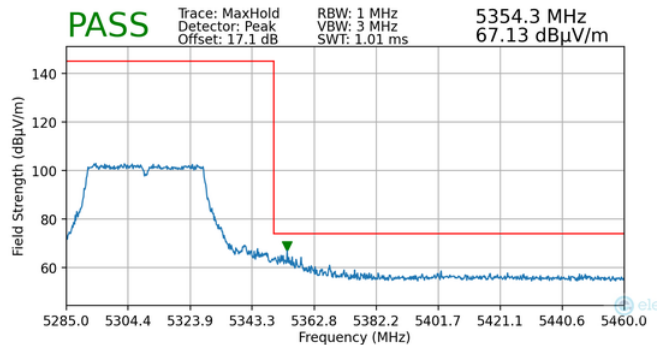


**Plot 7-145. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A)**

|                                                   |                                         |                                      |                                          |
|---------------------------------------------------|-----------------------------------------|--------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMS942B                         | <b>MEASUREMENT REPORT</b>               |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2508270084-16-R1.A3L | <b>Test Dates:</b><br>9/2/25 - 12/30/25 | <b>EUT Type:</b><br>Portable Handset | Page 116 of 144                          |

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5510MHz  
 Channel: 102

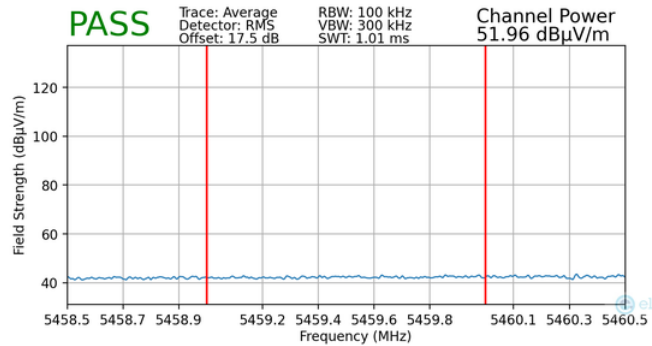


**Plot 7-146. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C)**

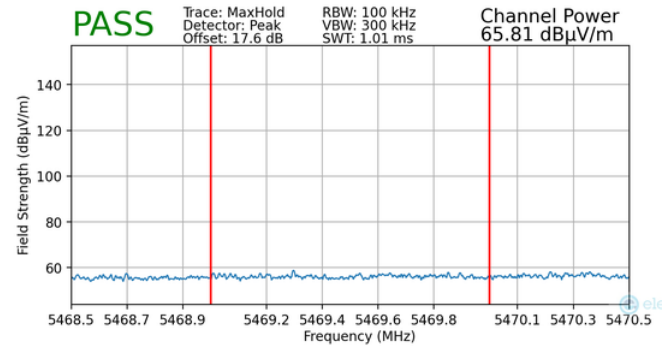

**Plot 7-147. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C)**


Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS8  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5795MHz  
 Channel: 159

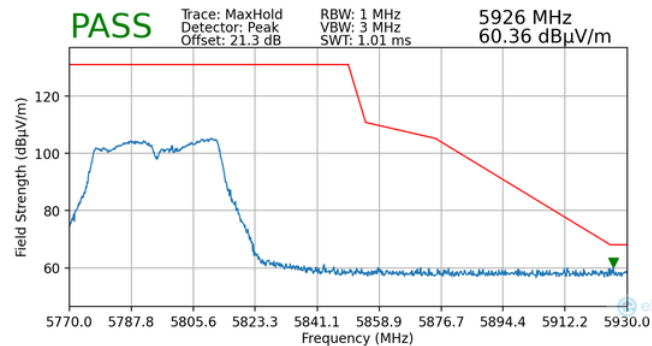

**Plot 7-148. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 3)**


|                                            |                                  |                               |                                   |
|--------------------------------------------|----------------------------------|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS942B                         | MEASUREMENT REPORT               |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2508270084-16-R1.A3L | Test Dates:<br>9/2/25 - 12/30/25 | EUT Type:<br>Portable Handset | Page 117 of 144                   |

Worst Case Mode: 802.11n  
Worst Case Transfer Rate: MCS8  
Distance of Measurements: 3 Meters  
Operating Frequency: 5835MHz  
Channel: 167

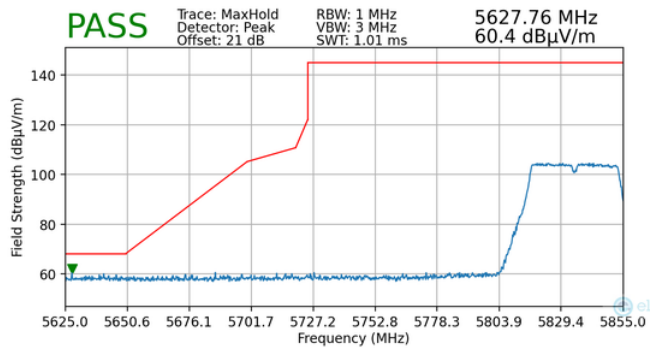


**Plot 7-149. Radiated Lower Band Edge Plot MIMO  
(Peak – UNII Band 4)**

Worst Case Mode: 802.11ax  
Worst Case Transfer Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 5875MHz  
Channel: 175

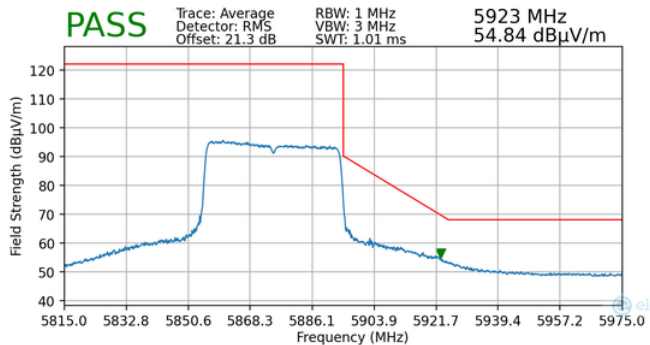


**Plot 7-150. Radiated Upper Band Edge Plot MIMO  
(Average – UNII Band 4)**

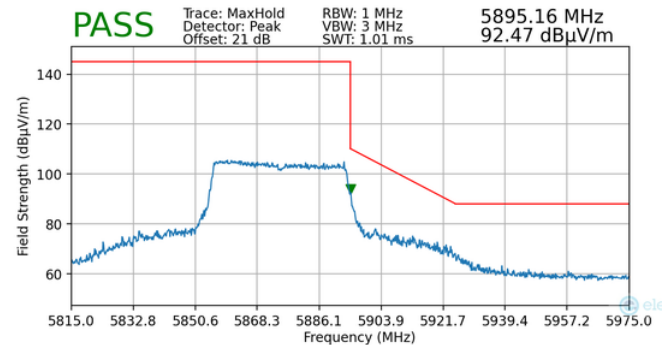


**Plot 7-151. Radiated Upper Band Edge Plot MIMO  
(Peak – UNII Band 4)**

|                                            |                                  |                               |                                   |
|--------------------------------------------|----------------------------------|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS942B                         | MEASUREMENT REPORT               |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2508270084-16-R1.A3L | Test Dates:<br>9/2/25 - 12/30/25 | EUT Type:<br>Portable Handset | Page 118 of 144                   |

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5510MHz  
 Channel: 102

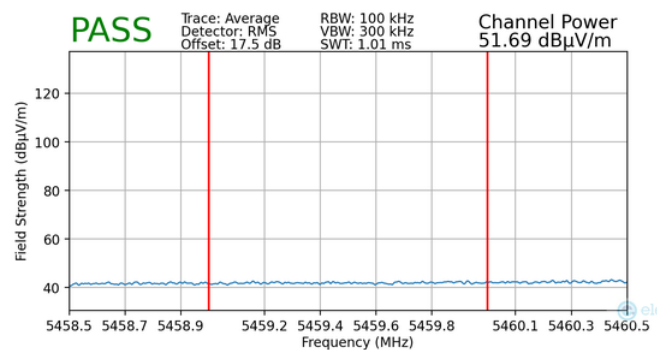

**Plot 7-152. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C) – WCP**

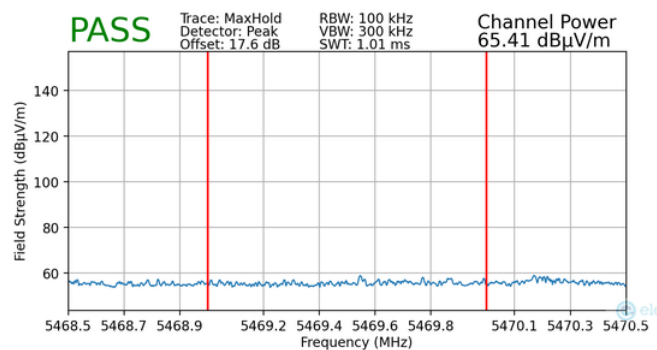


**Plot 7-153. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C) – WCP**


|                                                   |                                         |                                      |                                          |
|---------------------------------------------------|-----------------------------------------|--------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMS942B                         | <b>MEASUREMENT REPORT</b>               |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2508270084-16-R1.A3L | <b>Test Dates:</b><br>9/2/25 - 12/30/25 | <b>EUT Type:</b><br>Portable Handset | Page 119 of 144                          |

## 7.6.4 MIMO Radiated Band Edge Measurements (80MHz BW)

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11be |
| Worst Case Transfer Rate: | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5210MHz  |
| Channel:                  | 42       |

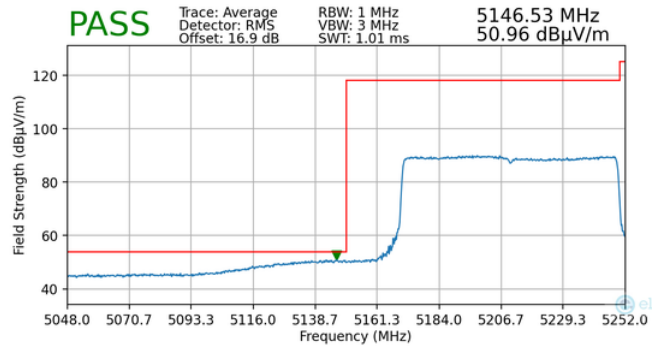


**Plot 7-154. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1)**

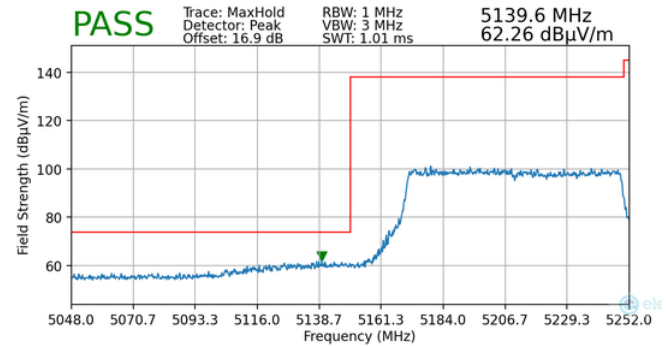


**Plot 7-155. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1)**

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ac |
| Worst Case Transfer Rate: | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5290MHz  |
| Channel:                  | 58       |

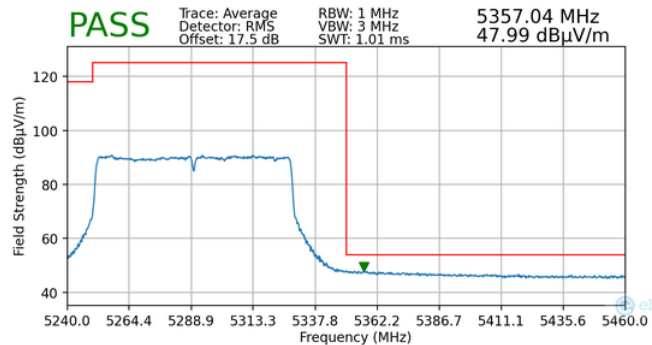


**Plot 7-156. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A)**

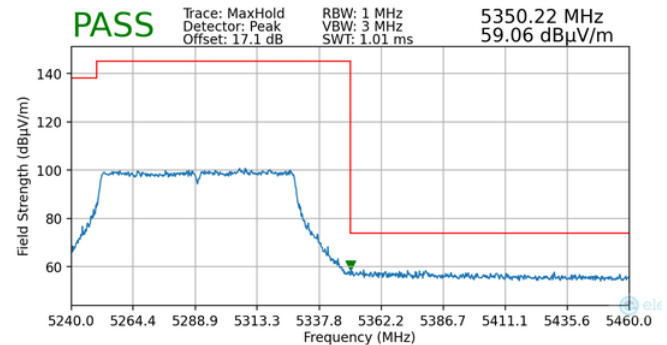


**Plot 7-157. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A)**

|                                                   |                                         |                                      |                                          |
|---------------------------------------------------|-----------------------------------------|--------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMS942B                         | <b>MEASUREMENT REPORT</b>               |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2508270084-16-R1.A3L | <b>Test Dates:</b><br>9/2/25 - 12/30/25 | <b>EUT Type:</b><br>Portable Handset | Page 120 of 144                          |

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5530MHz  
 Channel: 106

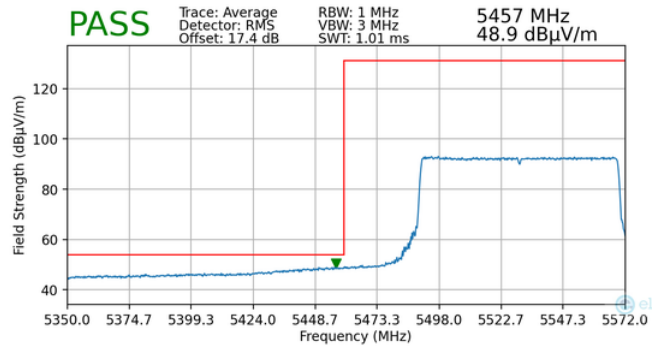


**Plot 7-158. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C)**

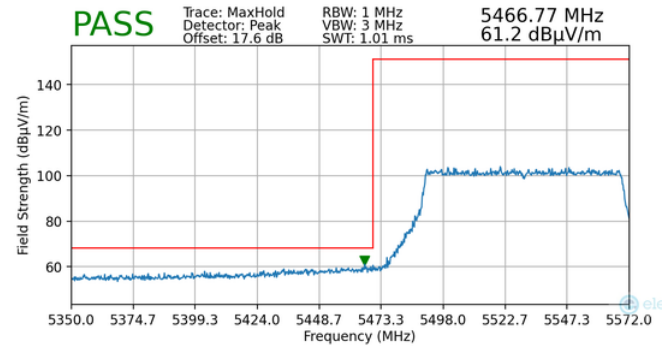

**Plot 7-159. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C)**


Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5775MHz  
 Channel: 155

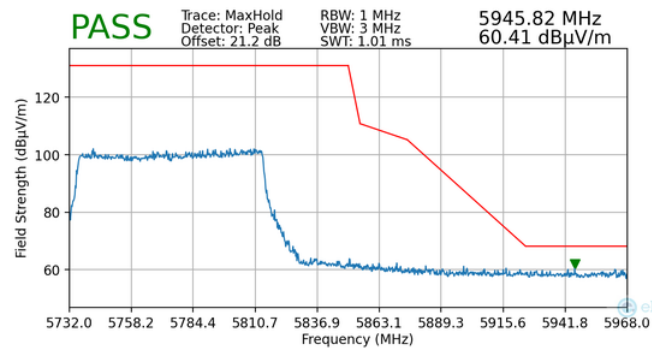

**Plot 7-160. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 3)**


|                                            |                                  |                               |                                   |
|--------------------------------------------|----------------------------------|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS942B                         | MEASUREMENT REPORT               |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2508270084-16-R1.A3L | Test Dates:<br>9/2/25 - 12/30/25 | EUT Type:<br>Portable Handset | Page 121 of 144                   |

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11be |
| Worst Case Transfer Rate: | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5855MHz  |
| Channel:                  | 171      |

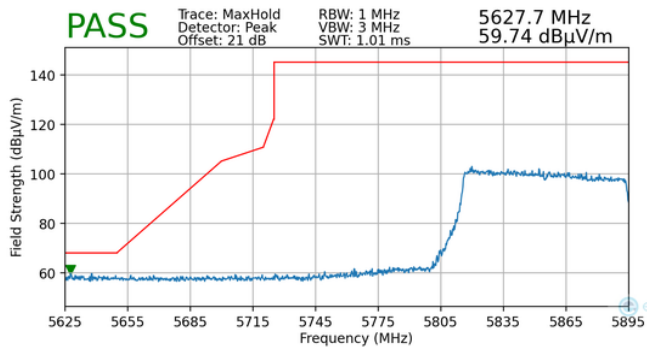


**Plot 7-161. Radiated Lower Band Edge Plot MIMO  
(Peak – UNII Band 3/4)**

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11be |
| Worst Case Transfer Rate: | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5855MHz  |
| Channel:                  | 171      |

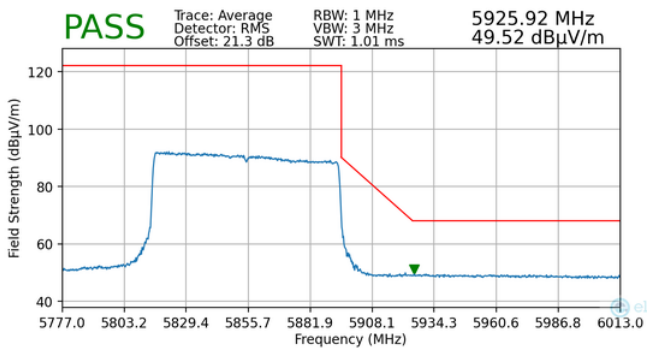

**Plot 7-162. Radiated Upper Band Edge Plot MIMO  
(Average – UNII Band 3/4)**

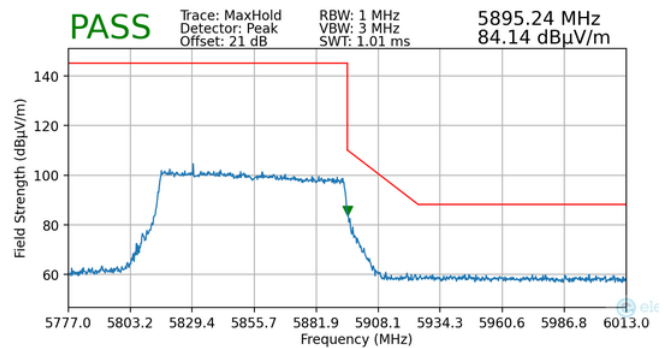


**Plot 7-163. Radiated Upper Band Edge Plot MIMO  
(Peak – UNII Band 3/4)**


|                                                   |                                         |                                      |                                          |
|---------------------------------------------------|-----------------------------------------|--------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMS942B                         | <b>MEASUREMENT REPORT</b>               |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2508270084-16-R1.A3L | <b>Test Dates:</b><br>9/2/25 - 12/30/25 | <b>EUT Type:</b><br>Portable Handset | Page 122 of 144                          |

## 7.6.5 MIMO Radiated Band Edge Measurements (80MHz BW - Punctured)

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11be |
| Worst Case Transfer Rate: | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5210MHz  |
| Channel:                  | 42       |

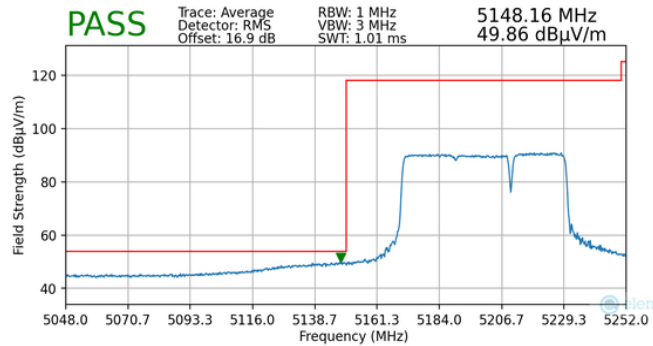


**Plot 7-164. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1)**

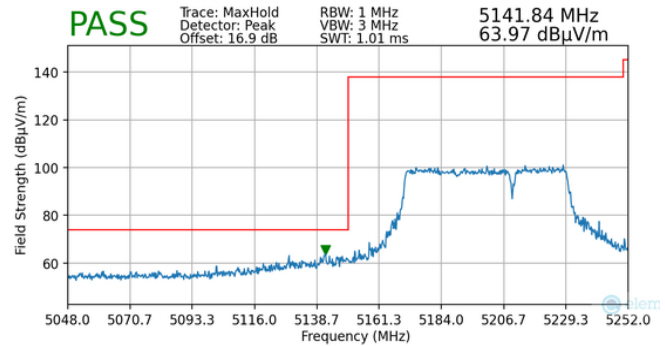


**Plot 7-165. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1)**

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11be |
| Worst Case Transfer Rate: | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5290MHz  |
| Channel:                  | 58       |

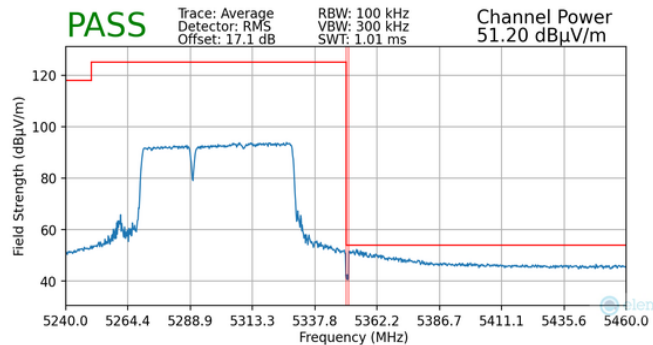


**Plot 7-166. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A)**

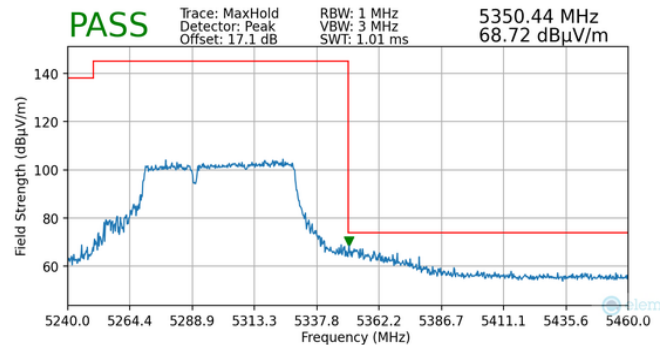


**Plot 7-167. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A)**

|                                                   |                                         |                                      |                                          |
|---------------------------------------------------|-----------------------------------------|--------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMS942B                         | <b>MEASUREMENT REPORT</b>               |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2508270084-16-R1.A3L | <b>Test Dates:</b><br>9/2/25 - 12/30/25 | <b>EUT Type:</b><br>Portable Handset | Page 123 of 144                          |

Worst Case Mode: 802.11be  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5530MHz  
 Channel: 106

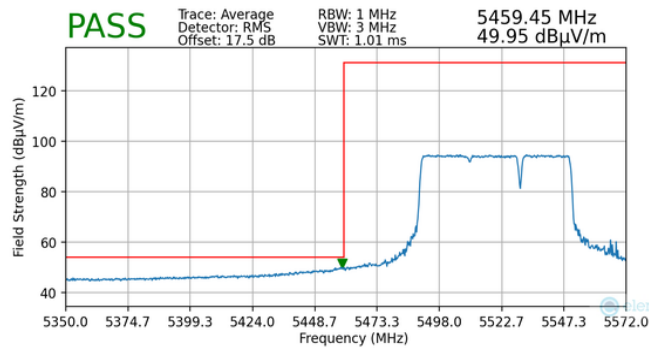


**Plot 7-168. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C)**

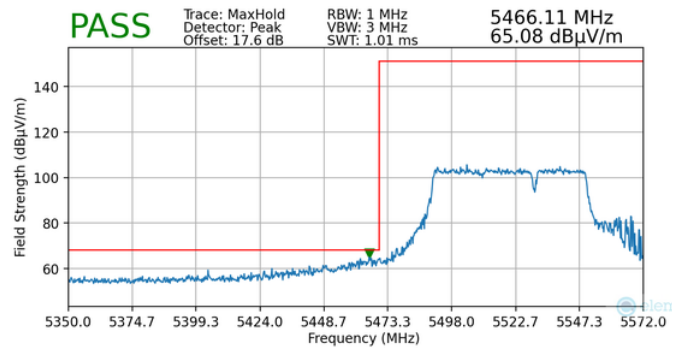

**Plot 7-169. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C)**


Worst Case Mode: 802.11be  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5775MHz  
 Channel: 155

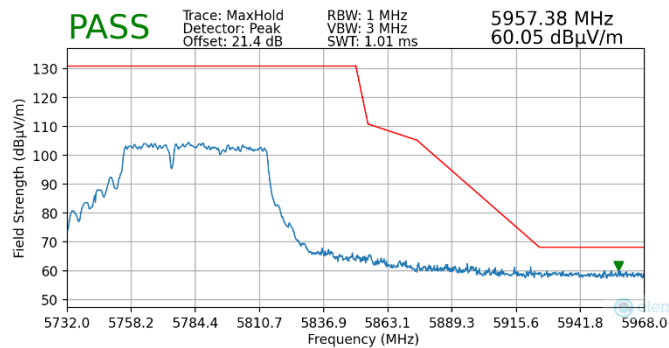

**Plot 7-170. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 3)**


|                                            |                                  |                               |                                   |
|--------------------------------------------|----------------------------------|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS942B                         | MEASUREMENT REPORT               |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2508270084-16-R1.A3L | Test Dates:<br>9/2/25 - 12/30/25 | EUT Type:<br>Portable Handset | Page 124 of 144                   |

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11be |
| Worst Case Transfer Rate: | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5855MHz  |
| Channel:                  | 171      |

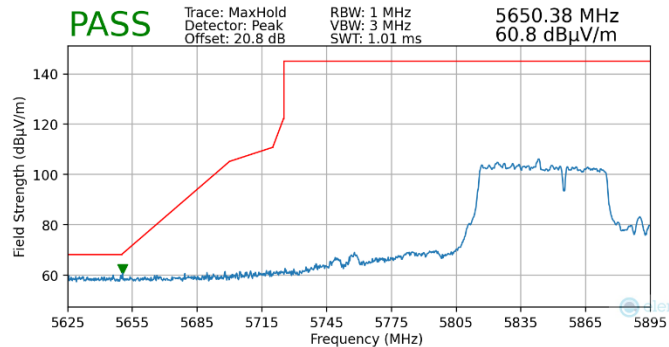


**Plot 7-171. Radiated Lower Band Edge Plot MIMO  
(Peak – UNII Band 3/4)**

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ac |
| Worst Case Transfer Rate: | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5855MHz  |
| Channel:                  | 171      |

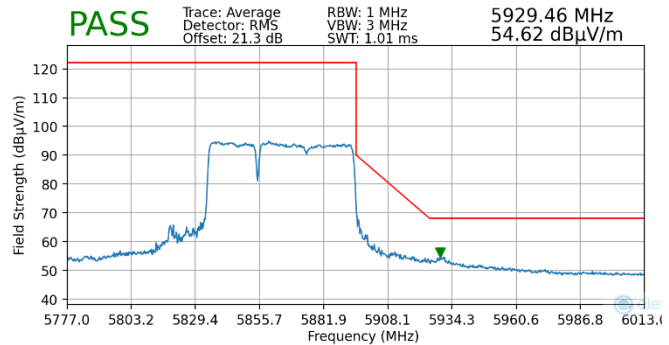

**Plot 7-172. Radiated Upper Band Edge Plot MIMO  
(Average – UNII Band 3/4)**

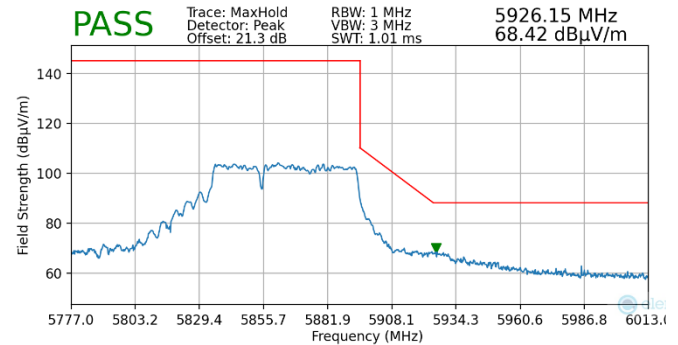


**Plot 7-173. Radiated Upper Band Edge Plot MIMO  
(Peak – UNII Band 3/4)**


|                                            |                                  |                               |                                   |
|--------------------------------------------|----------------------------------|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS942B                         | MEASUREMENT REPORT               |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2508270084-16-R1.A3L | Test Dates:<br>9/2/25 - 12/30/25 | EUT Type:<br>Portable Handset | Page 125 of 144                   |

## 7.6.6 MIMO Radiated Band Edge Measurements (160MHz BW)

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ac |
| Worst Case Transfer Rate: | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5250MHz  |
| Channel:                  | 50       |

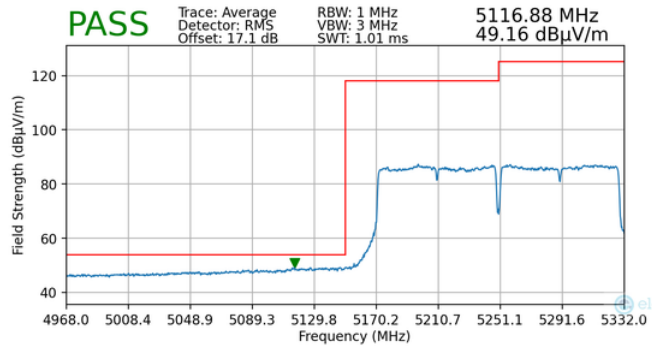


**Plot 7-174. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1)**

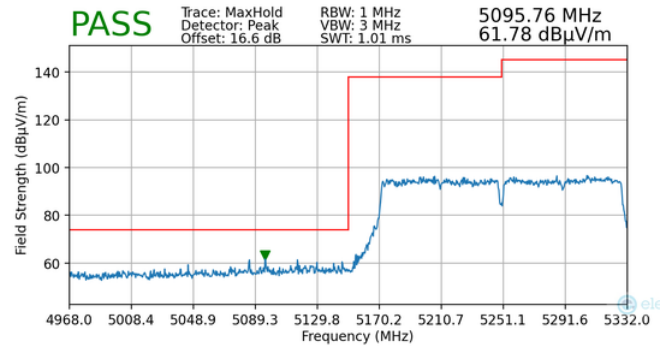


**Plot 7-175. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1)**

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ac |
| Worst Case Transfer Rate: | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5250MHz  |
| Channel:                  | 50       |

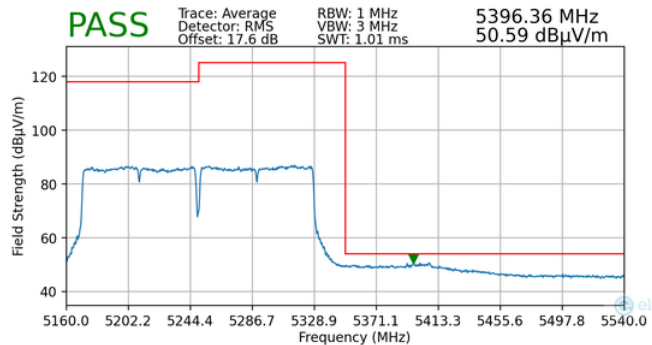


**Plot 7-176. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A)**

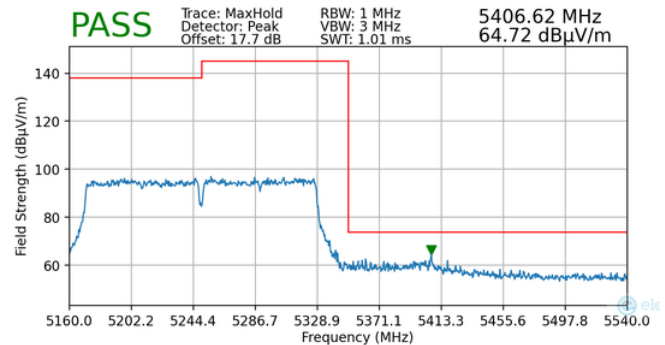


**Plot 7-177. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A)**

|                                            |                                  |                               |                                   |
|--------------------------------------------|----------------------------------|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS942B                         | MEASUREMENT REPORT               |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2508270084-16-R1.A3L | Test Dates:<br>9/2/25 - 12/30/25 | EUT Type:<br>Portable Handset | Page 126 of 144                   |

Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5570MHz  
 Channel: 114

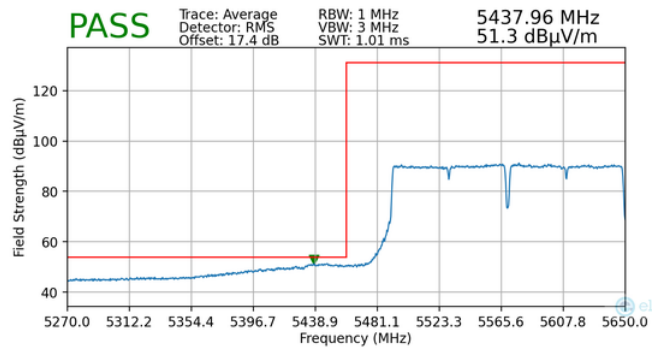


**Plot 7-178. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C)**

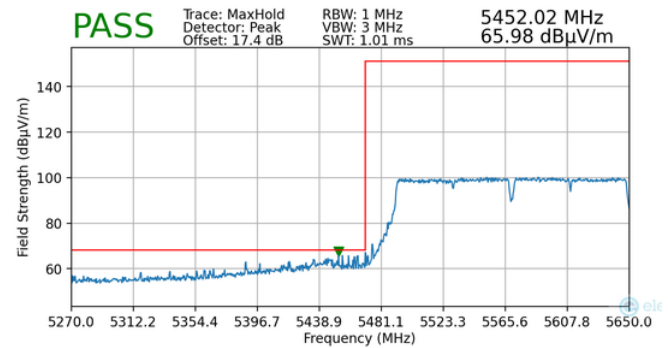

**Plot 7-179. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C)**


Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5815MHz  
 Channel: 163

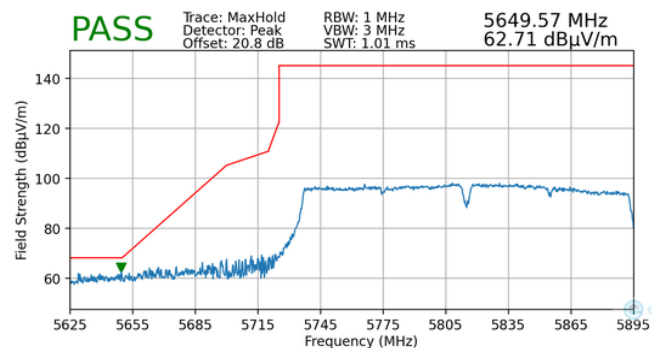


**Plot 7-180. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 3/4)**

|                                            |                                  |                               |                                   |
|--------------------------------------------|----------------------------------|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS942B                         | MEASUREMENT REPORT               |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2508270084-16-R1.A3L | Test Dates:<br>9/2/25 - 12/30/25 | EUT Type:<br>Portable Handset | Page 127 of 144                   |

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5815MHz  
 Channel: 163

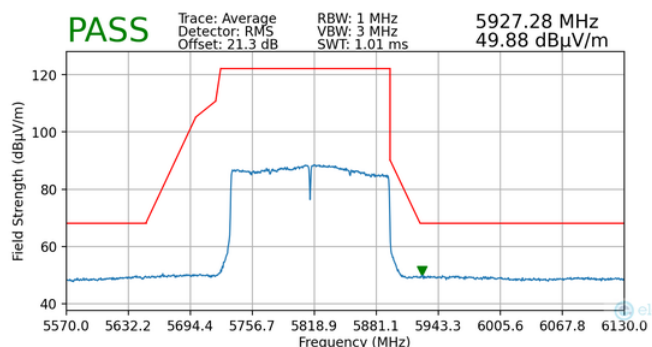

Plot 7-181. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 3/4)

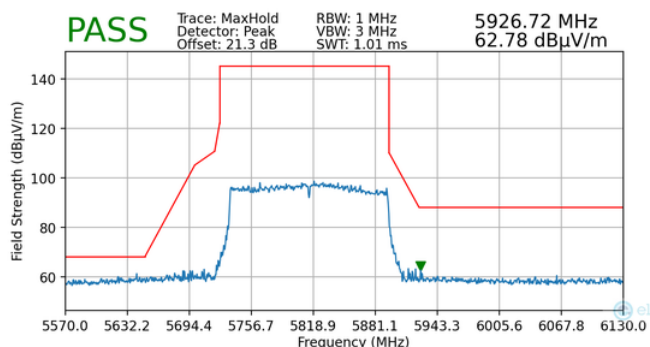


Plot 7-182. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 3/4)


|                                            |                                  |                               |                                   |
|--------------------------------------------|----------------------------------|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS942B                         | MEASUREMENT REPORT               |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2508270084-16-R1.A3L | Test Dates:<br>9/2/25 - 12/30/25 | EUT Type:<br>Portable Handset | Page 128 of 144                   |

## 7.6.7 MIMO Radiated Band Edge Measurements (160MHz BW - Punctured)

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11be |
| Worst Case Transfer Rate: | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5250MHz  |
| Channel:                  | 50       |

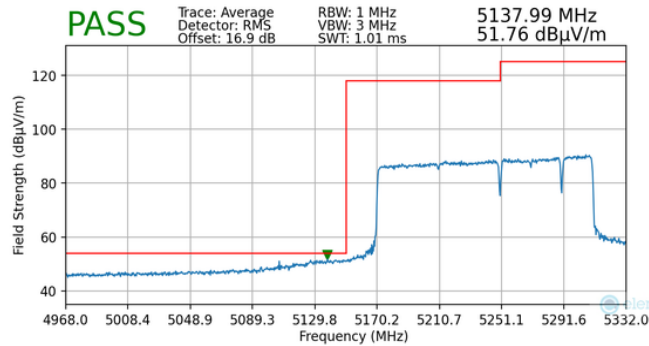


**Plot 7-183. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1)**

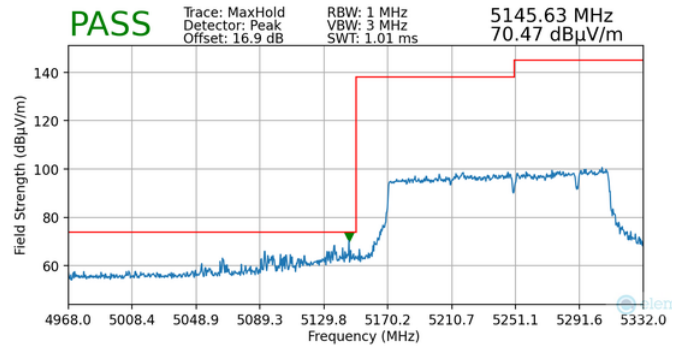


**Plot 7-184. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1)**

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11be |
| Worst Case Transfer Rate: | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5250MHz  |
| Channel:                  | 50       |

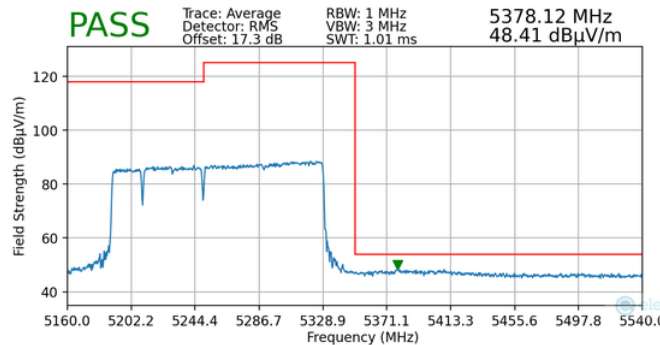


**Plot 7-185. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A)**

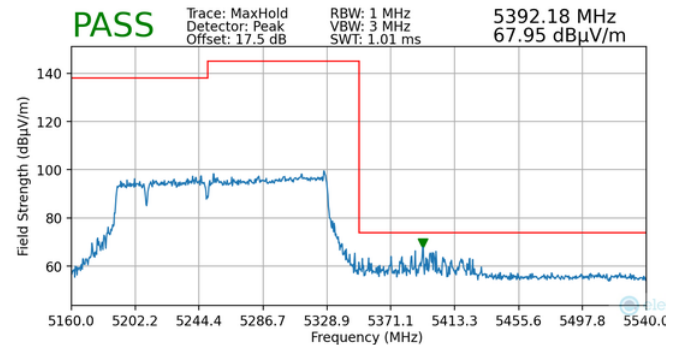


**Plot 7-186. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A)**

|                                                   |                                         |                                      |                                          |
|---------------------------------------------------|-----------------------------------------|--------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMS942B                         | <b>MEASUREMENT REPORT</b>               |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2508270084-16-R1.A3L | <b>Test Dates:</b><br>9/2/25 - 12/30/25 | <b>EUT Type:</b><br>Portable Handset | Page 129 of 144                          |

Worst Case Mode: 802.11be  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5570MHz  
 Channel: 114

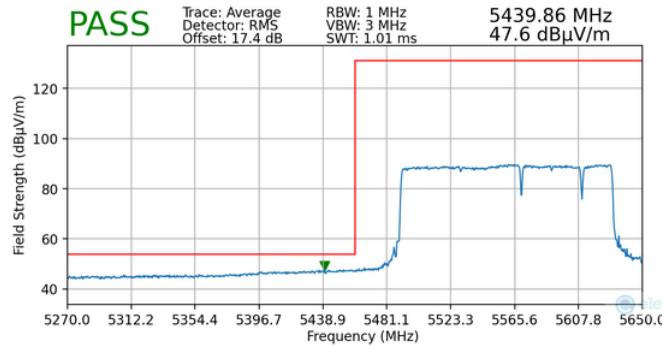


**Plot 7-187. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C)**

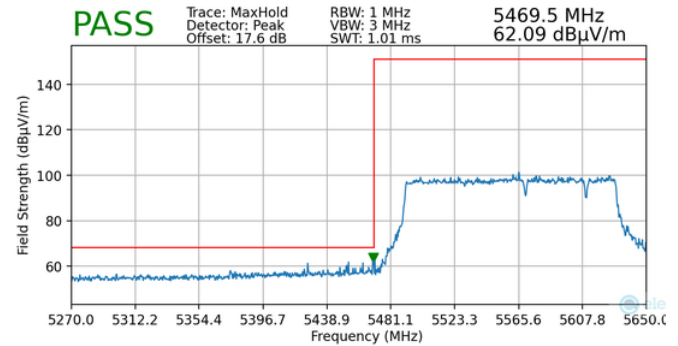

**Plot 7-188. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C)**


Worst Case Mode: 802.11be  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5815MHz  
 Channel: 163

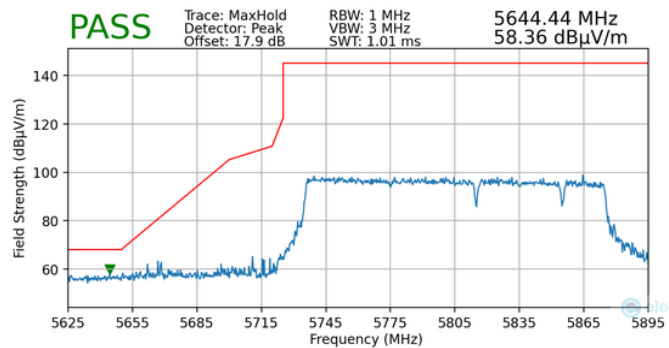


**Plot 7-189. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 3/4)**

|                                            |                                  |                               |                                   |
|--------------------------------------------|----------------------------------|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS942B                         | MEASUREMENT REPORT               |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2508270084-16-R1.A3L | Test Dates:<br>9/2/25 - 12/30/25 | EUT Type:<br>Portable Handset | Page 130 of 144                   |

Worst Case Mode: 802.11be  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5815MHz  
 Channel: 163

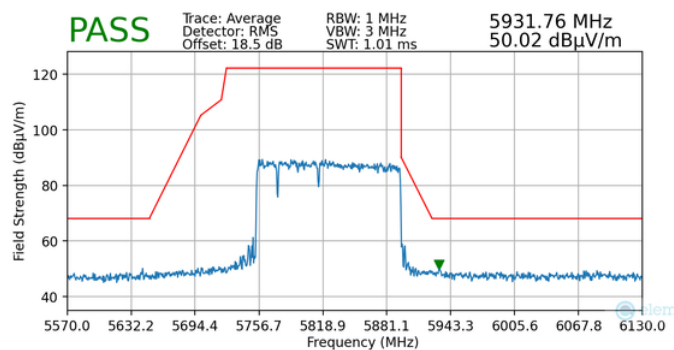

**Plot 7-190. Radiated Lower Band Edge Plot MIMO  
(Average – UNII Band 3/4)**

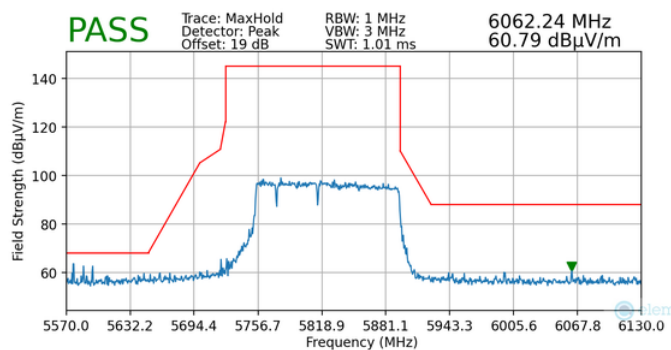

**Plot 7-191. Radiated Lower Band Edge Plot MIMO  
(Peak – UNII Band 3/4)**

|                                                   |                                         |                                      |                                          |
|---------------------------------------------------|-----------------------------------------|--------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMS942B                         | <b>MEASUREMENT REPORT</b>               |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2508270084-16-R1.A3L | <b>Test Dates:</b><br>9/2/25 - 12/30/25 | <b>EUT Type:</b><br>Portable Handset | Page 131 of 144                          |

## 7.7 Line-Conducted Test Data

### Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst-case emissions are reported in this section.

***All conducted emissions must not exceed the limits shown in the table below per FCC §15.207 and RSS-Gen (8.8).***

| Frequency of emission (MHz) | Conducted Limit (dBμV) |           |
|-----------------------------|------------------------|-----------|
|                             | Quasi-peak             | Average   |
| 0.15 – 0.5                  | 66 to 56*              | 56 to 46* |
| 0.5 – 5                     | 56                     | 46        |
| 5 – 30                      | 60                     | 50        |

**Table 7-39. Conducted Limits**

\*Decreases with the logarithm of the frequency.

### Test Procedures Used

ANSI C63.10:2020, Section 6.2

### Test Settings

#### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


#### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

|                                            |                                  |                               |                                   |
|--------------------------------------------|----------------------------------|-------------------------------|-----------------------------------|
| FCC ID: A3LSMS942B                         | MEASUREMENT REPORT               |                               | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2508270084-16-R1.A3L | Test Dates:<br>9/2/25 - 12/30/25 | EUT Type:<br>Portable Handset | Page 132 of 144                   |

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

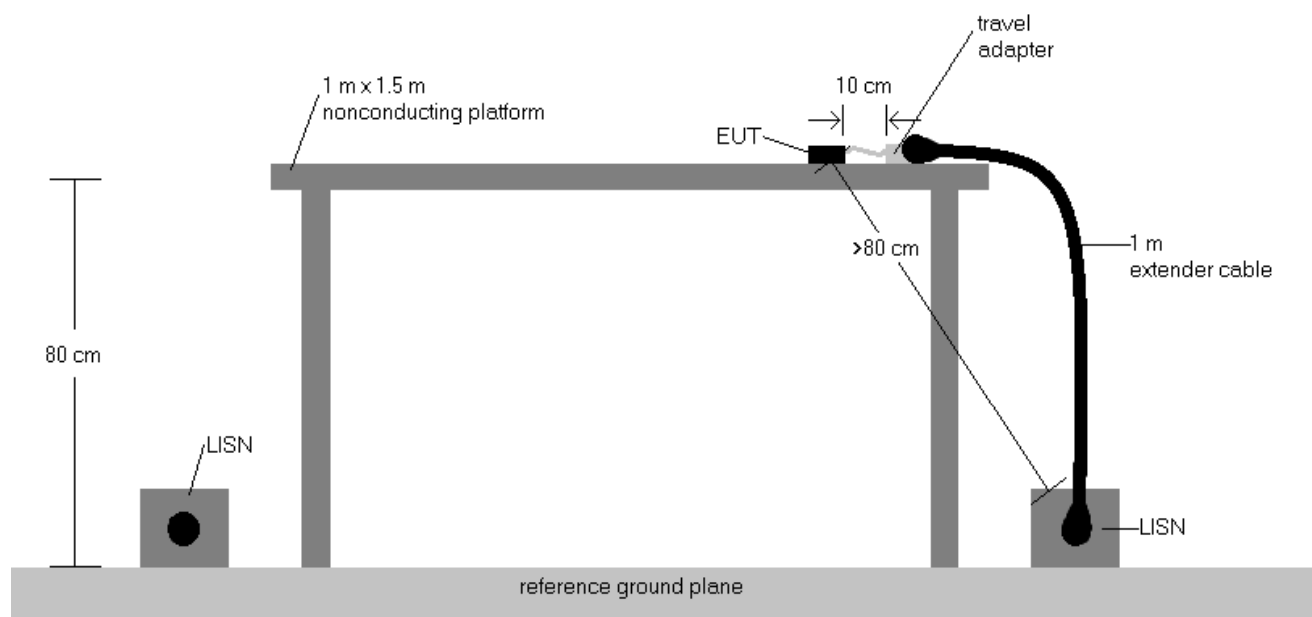

**Figure 7-8. Test Instrument & Measurement Setup**

## Test Notes

1. All modes of operation were investigated, and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz is specified in §15.207 and RSS-Gen (8.8).
3.  $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4.  $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5.  $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

|                                                   |                                         |                                      |                                          |
|---------------------------------------------------|-----------------------------------------|--------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMS942B                         | <b>MEASUREMENT REPORT</b>               |                                      | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2508270084-16-R1.A3L | <b>Test Dates:</b><br>9/2/25 - 12/30/25 | <b>EUT Type:</b><br>Portable Handset | Page 133 of 144                          |