

## APPENDIX C: CALIBRATION CERTIFICATE

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client  
**Element**  
YongIn, Republic of Korea

Certificate No. **MAGPy-8H3D-3060\_Jun25**

### CALIBRATION CERTIFICATE

Object **MAGPy-8H3D+E3DV2 SN:3060**  
**MAGPy-DASV2 SN:2051**

Calibration procedure(s) **QA CAL-46.v1**  
**Calibration Procedure for MAGPy-8H3D+E3D**  
**Near-field Electric and Magnetic Field Sensor System**

Calibration date **June 13, 2025**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID               | Cal Date (Certificate No.)     | Scheduled Calibration |
|----------------------------|------------------|--------------------------------|-----------------------|
| Oscilloscope               | SN: 110918       | 03-Sep-24 (No. 4030A315008835) | Sep-25                |
| Reference 20 dB Attenuator | SN: CC2552 (20x) | 26-Mar-25 (No. 217-04284)      | Mar-26                |
| Type-N mismatch            | SN: L1119        | 26-Mar-25 (No. 217-04292)      | Mar-26                |

| Secondary Standards     | ID             | Check Date (in house)  | Scheduled Check        |
|-------------------------|----------------|------------------------|------------------------|
| Network Analyzer E5061B | SN: MY49810822 | In house check: Nov-24 | In house check: Nov-25 |
| TEM Cell                | SN: S6029I     | In house check: Nov-24 | In house check: Nov-25 |
| Plate Capacitor         | SN: 6028I      | In house check: Nov-24 | In house check: Nov-25 |
| Resonator (160kHz)      | SN: 6030I      | In house check: Nov-24 | In house check: Nov-25 |

|                                                                                                                 | Name             | Function              | Signature                                                                             |
|-----------------------------------------------------------------------------------------------------------------|------------------|-----------------------|---------------------------------------------------------------------------------------|
| Calibrated by                                                                                                   | Krešimir Franjić | Laboratory Technician |  |
| Approved by                                                                                                     | Sven Kühn        | Technical Manager     |   |
| Issued: June 17, 2025                                                                                           |                  |                       |                                                                                       |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. |                  |                       |                                                                                       |

Certificate No: MAGPy-8H3D-3060\_Jun25

Page 1 of 26

|                          |                                                                                                                              |                                   |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|
| FCC ID: A3LSMS948B       |  <b>WPT RF EXPOSURE EVALUATION REPORT</b> | Reviewed by:<br>Technical Manager |
| Test Dates:<br>10/2/2025 | Apparatus/Device:<br>Portable Handset                                                                                        | APPENDIX C:<br>Page 1 of 26       |

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [CT.INFO@ELEMENT.COM](mailto:CT.INFO@ELEMENT.COM).

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

#### Glossary

MAGPy-8H3D-E3D Magnetic Amplitude and Gradient Probe – Eight H-field Sensors, Single E-field sensor  
MAGPy-DAS Magnetic Amplitude and Gradient Data Acquisition System

#### Calibration is Performed According to the Following Standards:

- a) IEEE Std 1309-2013, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", November 2013

#### Methods Applied and Interpretation of Parameters

- Calibration has been performed after the adjustment of the device.
- *Linearity*: Calibration of the linearity of the field reading over the specified dynamic range at 161.75 kHz. Influence of offset voltage is included in this measurement.
- *Frequency response*: Calibration of the field reading over the specified frequency range from 3.0 kHz to 10.0 MHz.
- *Receiving Pattern*: Assessed for H-field polarizations  $\theta$ , and  $\phi = 0^\circ \dots 360^\circ$ ;  $\theta = 90^\circ$ , and  $\phi = 0^\circ \dots 360^\circ$ ; for the XYZ sensors (in TEM-Cell at 4 kHz, 40 kHz, 400 kHz and 4 MHz).
- *Receiving Pattern*: Assessed for E-field polarizations  $\theta$ , and  $\phi = 0^\circ \dots 360^\circ$ ;  $\theta = 90^\circ$ , and  $\phi = 0^\circ \dots 360^\circ$ ; for the XYZ sensor (in parallel plate capacitor at 4 kHz, 40 kHz, 400 kHz and 4 MHz).

#### Calibration Uncertainty

The calibration uncertainty is 0.7 dB for the H-field readings and 1.06 dB for the E-field readings. The calibration uncertainty is specified over the frequency range from 3.0 kHz to 10.0 MHz and a dynamic range from 0.1 A/m to 3200 A/m and from 0.08 V/m to 2000 V/m respectively.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

|                          |                                                                                                                       |                                   |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------|-----------------------------------|
| FCC ID: A3LSMS948B       |  WPT RF EXPOSURE EVALUATION REPORT | Reviewed by:<br>Technical Manager |
| Test Dates:<br>10/2/2025 | Apparatus/Device:<br>Portable Handset                                                                                 | APPENDIX C:<br>Page 2 of 26       |

### Measurement Conditions

|                        |                                  |               |
|------------------------|----------------------------------|---------------|
| Unit Type              | MAGPy-8H3D+E3DV2 (SP MGY 303 AA) | 3060          |
|                        | MAGPy-DASV2 (SE UMS 303 AE)      | 2051          |
|                        | MAGPy FPGA Board                 | WP000210      |
| Adjustment Date        | Last MAGPy Adjustment            | June 13, 2025 |
| Firmware SW Version    | MAGPy Firmware                   | Ver. 1.00     |
| Backend SW Version     | MAGPy Backend                    | Ver. 1.0.2    |
| Calibration SW Version | MAGACAP                          | Ver. 1.0      |

### Dynamic Range

#### Dynamic Range, H-field, Channel 0

| H-field/(A/m) Applied |       |       | H-field/(A/m) Reading |       |       | Difference/(dB) |       |       | Tolerance/(dB) |
|-----------------------|-------|-------|-----------------------|-------|-------|-----------------|-------|-------|----------------|
| x                     | y     | z     | x                     | y     | z     | x               | y     | z     |                |
| 0.390                 | 0.380 | 0.370 | 0.410                 | 0.400 | 0.370 | 0.43            | 0.45  | 0.00  | ±1.00          |
| 0.530                 | 0.520 | 0.500 | 0.530                 | 0.550 | 0.500 | 0.00            | 0.49  | 0.00  | ±1.00          |
| 0.730                 | 0.720 | 0.690 | 0.720                 | 0.720 | 0.690 | -0.12           | 0.00  | 0.00  | ±1.00          |
| 0.960                 | 0.940 | 0.900 | 0.940                 | 0.930 | 0.890 | -0.18           | -0.09 | -0.10 | ±1.00          |
| 1.29                  | 1.27  | 1.21  | 1.29                  | 1.26  | 1.20  | 0.00            | -0.07 | -0.07 | ±1.00          |
| 1.78                  | 1.75  | 1.67  | 1.77                  | 1.74  | 1.65  | -0.05           | -0.05 | -0.10 | ±1.00          |
| 2.36                  | 2.33  | 2.22  | 2.36                  | 2.33  | 2.21  | 0.00            | 0.00  | -0.04 | ±0.20          |
| 3.15                  | 3.10  | 2.97  | 3.14                  | 3.09  | 2.96  | -0.03           | -0.03 | -0.03 | ±0.20          |
| 4.28                  | 4.22  | 4.03  | 4.30                  | 4.19  | 4.04  | 0.04            | -0.06 | 0.02  | ±0.20          |
| 5.77                  | 5.69  | 5.46  | 5.85                  | 5.67  | 5.47  | 0.12            | -0.03 | 0.02  | ±0.20          |
| 7.76                  | 7.66  | 7.33  | 7.85                  | 7.65  | 7.34  | 0.10            | -0.01 | 0.01  | ±0.20          |
| 10.4                  | 10.2  | 9.79  | 10.5                  | 10.2  | 9.80  | 0.08            | 0.00  | 0.01  | ±0.20          |
| 14.0                  | 13.8  | 13.2  | 14.1                  | 13.9  | 13.3  | 0.06            | 0.06  | 0.07  | ±0.20          |
| 18.9                  | 18.6  | 17.9  | 18.9                  | 18.7  | 17.9  | 0.00            | 0.05  | 0.00  | ±0.20          |
| 25.4                  | 25.1  | 24.1  | 25.6                  | 25.2  | 24.2  | 0.07            | 0.03  | 0.04  | ±0.20          |
| 34.0                  | 33.5  | 32.2  | 34.2                  | 33.7  | 32.4  | 0.05            | 0.05  | 0.05  | ±0.20          |
| 46.0                  | 45.2  | 43.5  | 46.2                  | 45.5  | 43.7  | 0.04            | 0.06  | 0.04  | ±0.20          |
| 62.4                  | 61.3  | 59.0  | 62.6                  | 61.6  | 59.3  | 0.03            | 0.04  | 0.04  | ±0.20          |
| 85.6                  | 84.2  | 81.1  | 85.2                  | 83.8  | 80.8  | -0.04           | -0.04 | -0.03 | ±0.20          |
| 112                   | 110   | 106   | 112                   | 110   | 106   | 0.00            | 0.00  | 0.00  | ±0.20          |
| 154                   | 151   | 146   | 154                   | 151   | 145   | 0.00            | 0.00  | -0.06 | ±0.20          |
| 214                   | 209   | 202   | 213                   | 209   | 202   | -0.04           | 0.00  | 0.00  | ±0.20          |
| 296                   | 289   | 280   | 297                   | 285   | 281   | 0.03            | -0.12 | 0.03  | ±0.20          |
| 437                   | 427   | 412   | 431                   | 421   | 405   | -0.12           | -0.12 | -0.15 | ±0.20          |
| 602                   | 587   | 568   | 598                   | 585   | 562   | -0.06           | -0.03 | -0.09 | ±0.20          |
| 898                   | 877   | 846   | 902                   | 881   | 848   | 0.04            | 0.04  | 0.00  | ±0.20          |
| 1360                  | 1330  | 1280  | 1380                  | 1350  | 1300  | 0.13            | 0.13  | 0.13  | ±0.30          |
| 1850                  | 1800  | 1740  | 1900                  | 1860  | 1780  | 0.23            | 0.28  | 0.20  | ±0.30          |
| 3010                  | 2940  | 2830  | 3120                  | 3050  | 2930  | 0.31            | 0.32  | 0.30  | ±0.50          |
| 3580                  | 3500  | 3370  | 3740                  | 3660  | 3510  | 0.38            | 0.39  | 0.35  | ±0.50          |

SPEAG H-field linearity tolerance criteria<sup>1</sup>:  
±1.0 dB for applied H-fields < 2.0 A/m  
±0.2 dB for applied H-fields ≥ 2.0 A/m and < 1000 A/m  
±0.3 dB for applied H-fields ≥ 1000 A/m and < 2000 A/m  
±0.4 dB for applied H-fields ≥ 2000 A/m and < 3000 A/m  
±0.5 dB for applied H-fields ≥ 3000 A/m

<sup>1</sup>Calibration uncertainty not taken into account (shared risk 50%).

|                                 |                                                                                                                              |                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|
| FCC ID: A3LSMS948B              |  <b>WPT RF EXPOSURE EVALUATION REPORT</b> | <b>Reviewed by:</b><br>Technical Manager |
| <b>Test Dates:</b><br>10/2/2025 | <b>Apparatus/Device:</b><br>Portable Handset                                                                                 | <b>APPENDIX C:</b><br>Page 3 of 26       |

Dynamic Range, H-field, Channel 1

| H-field/(A/m) Applied |       |       | H-field/(A/m) Reading |       |       | Difference/(dB) |       |       | Tolerance/(dB) |
|-----------------------|-------|-------|-----------------------|-------|-------|-----------------|-------|-------|----------------|
| x                     | y     | z     | x                     | y     | z     | x               | y     | z     |                |
| 0.400                 | 0.390 | 0.380 | 0.400                 | 0.410 | 0.400 | 0.00            | 0.43  | 0.45  | ±1.00          |
| 0.540                 | 0.530 | 0.520 | 0.530                 | 0.550 | 0.540 | -0.16           | 0.32  | 0.33  | ±1.00          |
| 0.750                 | 0.730 | 0.710 | 0.730                 | 0.720 | 0.730 | -0.23           | -0.12 | 0.24  | ±1.00          |
| 0.970                 | 0.960 | 0.930 | 0.960                 | 0.930 | 0.930 | -0.09           | -0.28 | 0.00  | ±1.00          |
| 1.31                  | 1.29  | 1.26  | 1.32                  | 1.28  | 1.25  | 0.07            | -0.07 | -0.07 | ±1.00          |
| 1.80                  | 1.78  | 1.74  | 1.80                  | 1.77  | 1.72  | 0.00            | -0.05 | -0.10 | ±1.00          |
| 2.40                  | 2.37  | 2.31  | 2.39                  | 2.36  | 2.31  | -0.04           | -0.04 | 0.00  | ±0.20          |
| 3.20                  | 3.16  | 3.09  | 3.21                  | 3.15  | 3.08  | 0.03            | -0.03 | -0.03 | ±0.20          |
| 4.34                  | 4.29  | 4.20  | 4.35                  | 4.27  | 4.20  | 0.02            | -0.04 | 0.00  | ±0.20          |
| 5.86                  | 5.79  | 5.68  | 5.92                  | 5.79  | 5.68  | 0.09            | 0.00  | 0.00  | ±0.20          |
| 7.87                  | 7.79  | 7.63  | 7.94                  | 7.82  | 7.63  | 0.08            | 0.03  | 0.00  | ±0.20          |
| 10.5                  | 10.4  | 10.2  | 10.6                  | 10.4  | 10.2  | 0.08            | 0.00  | 0.00  | ±0.20          |
| 14.2                  | 14.0  | 13.8  | 14.3                  | 14.1  | 13.8  | 0.06            | 0.06  | 0.00  | ±0.20          |
| 19.1                  | 18.9  | 18.6  | 19.2                  | 19.0  | 18.6  | 0.05            | 0.05  | 0.00  | ±0.20          |
| 25.8                  | 25.6  | 25.1  | 25.9                  | 25.6  | 25.2  | 0.03            | 0.00  | 0.03  | ±0.20          |
| 34.5                  | 34.1  | 33.5  | 34.7                  | 34.3  | 33.7  | 0.05            | 0.05  | 0.05  | ±0.20          |
| 46.6                  | 46.0  | 45.3  | 46.9                  | 46.3  | 45.5  | 0.06            | 0.06  | 0.04  | ±0.20          |
| 63.3                  | 62.4  | 61.4  | 63.5                  | 62.7  | 61.7  | 0.03            | 0.04  | 0.04  | ±0.20          |
| 86.8                  | 85.6  | 84.4  | 86.5                  | 85.3  | 84.0  | -0.03           | -0.03 | -0.04 | ±0.20          |
| 114                   | 112   | 110   | 113                   | 112   | 110   | -0.08           | 0.00  | 0.00  | ±0.20          |
| 156                   | 154   | 152   | 156                   | 153   | 151   | 0.00            | -0.06 | -0.06 | ±0.20          |
| 217                   | 213   | 210   | 217                   | 213   | 210   | 0.00            | 0.00  | 0.00  | ±0.20          |
| 300                   | 294   | 291   | 302                   | 290   | 292   | 0.06            | -0.12 | 0.03  | ±0.20          |
| 443                   | 434   | 428   | 438                   | 428   | 422   | -0.10           | -0.12 | -0.12 | ±0.20          |
| 611                   | 598   | 591   | 607                   | 595   | 585   | -0.06           | -0.04 | -0.09 | ±0.20          |
| 911                   | 892   | 880   | 915                   | 896   | 880   | 0.04            | 0.04  | 0.00  | ±0.20          |
| 1380                  | 1350  | 1330  | 1400                  | 1370  | 1350  | 0.12            | 0.13  | 0.13  | ±0.30          |
| 1880                  | 1830  | 1810  | 1930                  | 1890  | 1850  | 0.23            | 0.28  | 0.19  | ±0.30          |
| 3050                  | 2990  | 2940  | 3170                  | 3110  | 3050  | 0.34            | 0.34  | 0.32  | ±0.50          |
| 3640                  | 3560  | 3510  | 3800                  | 3720  | 3650  | 0.37            | 0.38  | 0.34  | ±0.50          |

SPEAG H-field linearity tolerance criteria<sup>1</sup>:  
±1.0dB for applied H-fields < 2.0A/m  
±0.2dB for applied H-fields ≥ 2.0A/m and < 1000A/m  
±0.3dB for applied H-fields ≥ 1000A/m and < 2000A/m  
±0.4dB for applied H-fields ≥ 2000A/m and < 3000A/m  
±0.5dB for applied H-fields ≥ 3000A/m

<sup>1</sup> Calibration uncertainty not taken into account (shared risk 50%).

|                          |                                                                                                                       |                                   |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------|-----------------------------------|
| FCC ID: A3LSMS948B       |  WPT RF EXPOSURE EVALUATION REPORT | Reviewed by:<br>Technical Manager |
| Test Dates:<br>10/2/2025 | Apparatus/Device:<br>Portable Handset                                                                                 | APPENDIX C:<br>Page 4 of 26       |

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [CT.INFO@ELEMENT.COM](mailto:CT.INFO@ELEMENT.COM).

Dynamic Range, H-field, Channel 2

| H-field/(A/m) Applied |       |       | H-field/(A/m) Reading |       |       | Difference/(dB) |       |       | Tolerance/(dB) |
|-----------------------|-------|-------|-----------------------|-------|-------|-----------------|-------|-------|----------------|
| x                     | y     | z     | x                     | y     | z     | x               | y     | z     |                |
| 0.390                 | 0.390 | 0.390 | 0.410                 | 0.400 | 0.410 | 0.43            | 0.22  | 0.43  | ±1.00          |
| 0.530                 | 0.520 | 0.520 | 0.560                 | 0.540 | 0.550 | 0.48            | 0.33  | 0.49  | ±1.00          |
| 0.730                 | 0.720 | 0.720 | 0.740                 | 0.740 | 0.730 | 0.12            | 0.24  | 0.12  | ±1.00          |
| 0.950                 | 0.940 | 0.940 | 0.970                 | 0.960 | 0.940 | 0.18            | 0.18  | 0.00  | ±1.00          |
| 1.29                  | 1.28  | 1.27  | 1.33                  | 1.28  | 1.29  | 0.27            | 0.00  | 0.14  | ±1.00          |
| 1.77                  | 1.75  | 1.75  | 1.79                  | 1.74  | 1.76  | 0.10            | -0.05 | 0.05  | ±1.00          |
| 2.35                  | 2.34  | 2.33  | 2.39                  | 2.33  | 2.35  | 0.15            | -0.04 | 0.07  | ±0.20          |
| 3.14                  | 3.12  | 3.12  | 3.17                  | 3.14  | 3.13  | 0.08            | 0.06  | 0.03  | ±0.20          |
| 4.26                  | 4.24  | 4.23  | 4.28                  | 4.25  | 4.24  | 0.04            | 0.02  | 0.02  | ±0.20          |
| 5.76                  | 5.72  | 5.73  | 5.78                  | 5.76  | 5.73  | 0.03            | 0.06  | 0.00  | ±0.20          |
| 7.73                  | 7.69  | 7.70  | 7.76                  | 7.72  | 7.72  | 0.03            | 0.03  | 0.02  | ±0.20          |
| 10.3                  | 10.3  | 10.3  | 10.3                  | 10.3  | 10.3  | 0.00            | 0.00  | 0.00  | ±0.20          |
| 13.9                  | 13.9  | 13.9  | 14.0                  | 13.9  | 13.9  | 0.06            | 0.00  | 0.00  | ±0.20          |
| 18.8                  | 18.7  | 18.8  | 18.8                  | 18.7  | 18.8  | 0.00            | 0.00  | 0.00  | ±0.20          |
| 25.4                  | 25.2  | 25.3  | 25.4                  | 25.2  | 25.3  | 0.00            | 0.00  | 0.00  | ±0.20          |
| 33.9                  | 33.6  | 33.8  | 34.1                  | 33.9  | 34.0  | 0.05            | 0.08  | 0.05  | ±0.20          |
| 45.8                  | 45.5  | 45.7  | 46.0                  | 45.7  | 45.9  | 0.04            | 0.04  | 0.04  | ±0.20          |
| 62.1                  | 61.6  | 62.0  | 62.4                  | 62.0  | 62.3  | 0.04            | 0.06  | 0.04  | ±0.20          |
| 85.3                  | 84.6  | 85.2  | 85.0                  | 84.2  | 84.8  | -0.03           | -0.04 | -0.04 | ±0.20          |
| 112                   | 111   | 111   | 111                   | 110   | 111   | -0.08           | -0.08 | 0.00  | ±0.20          |
| 154                   | 152   | 153   | 153                   | 151   | 153   | -0.06           | -0.06 | 0.00  | ±0.20          |
| 213                   | 210   | 212   | 213                   | 210   | 212   | 0.00            | 0.00  | 0.00  | ±0.20          |
| 295                   | 291   | 293   | 297                   | 286   | 295   | 0.06            | -0.15 | 0.06  | ±0.20          |
| 435                   | 429   | 432   | 430                   | 423   | 425   | -0.10           | -0.12 | -0.14 | ±0.20          |
| 600                   | 590   | 596   | 596                   | 587   | 590   | -0.06           | -0.04 | -0.09 | ±0.20          |
| 895                   | 881   | 888   | 899                   | 885   | 888   | 0.04            | 0.04  | 0.00  | ±0.20          |
| 1350                  | 1330  | 1340  | 1380                  | 1350  | 1360  | 0.19            | 0.13  | 0.13  | ±0.30          |
| 1840                  | 1810  | 1830  | 1900                  | 1860  | 1870  | 0.28            | 0.24  | 0.19  | ±0.30          |
| 3000                  | 2950  | 2970  | 3120                  | 3070  | 3070  | 0.34            | 0.35  | 0.29  | ±0.40          |
| 3570                  | 3520  | 3540  | 3730                  | 3670  | 3680  | 0.38            | 0.36  | 0.34  | ±0.50          |

SPEAG H-field linearity tolerance criteria<sup>1</sup>:  
±1.0dB for applied H-fields < 2.0A/m  
±0.2dB for applied H-fields ≥ 2.0A/m and < 1000A/m  
±0.3dB for applied H-fields ≥ 1000A/m and < 2000A/m  
±0.4dB for applied H-fields ≥ 2000A/m and < 3000A/m  
±0.5dB for applied H-fields ≥ 3000A/m

<sup>1</sup> Calibration uncertainty not taken into account (shared risk 50%).

|                                 |                                                                                                                              |                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|
| FCC ID: A3LSMS948B              |  <b>WPT RF EXPOSURE EVALUATION REPORT</b> | <b>Reviewed by:</b><br>Technical Manager |
| <b>Test Dates:</b><br>10/2/2025 | <b>Apparatus/Device:</b><br>Portable Handset                                                                                 | APPENDIX C:<br>Page 5 of 26              |

Dynamic Range, H-field, Channel 3

| H-field/(A/m) Applied |       |       | H-field/(A/m) Reading |       |       | Difference/(dB) |       |       | Tolerance/(dB) |
|-----------------------|-------|-------|-----------------------|-------|-------|-----------------|-------|-------|----------------|
| x                     | y     | z     | x                     | y     | z     | x               | y     | z     |                |
| 0.390                 | 0.380 | 0.380 | 0.420                 | 0.390 | 0.390 | 0.64            | 0.23  | 0.23  | ±1.00          |
| 0.520                 | 0.520 | 0.510 | 0.570                 | 0.540 | 0.530 | 0.80            | 0.33  | 0.33  | ±1.00          |
| 0.720                 | 0.720 | 0.710 | 0.770                 | 0.730 | 0.720 | 0.58            | 0.12  | 0.12  | ±1.00          |
| 0.940                 | 0.930 | 0.920 | 0.970                 | 0.940 | 0.930 | 0.27            | 0.09  | 0.09  | ±1.00          |
| 1.27                  | 1.26  | 1.25  | 1.29                  | 1.25  | 1.25  | 0.14            | -0.07 | 0.00  | ±1.00          |
| 1.74                  | 1.74  | 1.71  | 1.77                  | 1.72  | 1.70  | 0.15            | -0.10 | -0.05 | ±1.00          |
| 2.32                  | 2.31  | 2.29  | 2.36                  | 2.31  | 2.29  | 0.15            | 0.00  | 0.00  | ±0.20          |
| 3.09                  | 3.09  | 3.05  | 3.12                  | 3.11  | 3.05  | 0.08            | 0.06  | 0.00  | ±0.20          |
| 4.20                  | 4.19  | 4.14  | 4.22                  | 4.21  | 4.14  | 0.04            | 0.04  | 0.00  | ±0.20          |
| 5.67                  | 5.66  | 5.61  | 5.70                  | 5.68  | 5.62  | 0.05            | 0.03  | 0.02  | ±0.20          |
| 7.61                  | 7.61  | 7.54  | 7.68                  | 7.63  | 7.55  | 0.08            | 0.02  | 0.01  | ±0.20          |
| 10.2                  | 10.2  | 10.1  | 10.2                  | 10.2  | 10.1  | 0.00            | 0.00  | 0.00  | ±0.20          |
| 13.7                  | 13.7  | 13.6  | 13.8                  | 13.8  | 13.7  | 0.06            | 0.06  | 0.06  | ±0.20          |
| 18.5                  | 18.5  | 18.4  | 18.6                  | 18.5  | 18.4  | 0.05            | 0.00  | 0.00  | ±0.20          |
| 25.0                  | 25.0  | 24.8  | 25.1                  | 25.0  | 24.8  | 0.03            | 0.00  | 0.00  | ±0.20          |
| 33.4                  | 33.3  | 33.1  | 33.6                  | 33.5  | 33.3  | 0.05            | 0.05  | 0.05  | ±0.20          |
| 45.1                  | 45.0  | 44.7  | 45.4                  | 45.2  | 44.9  | 0.06            | 0.04  | 0.04  | ±0.20          |
| 61.2                  | 61.0  | 60.7  | 61.5                  | 61.3  | 61.0  | 0.04            | 0.04  | 0.04  | ±0.20          |
| 84.0                  | 83.7  | 83.4  | 83.7                  | 83.4  | 83.0  | -0.03           | -0.03 | -0.04 | ±0.20          |
| 110                   | 109   | 109   | 110                   | 109   | 109   | 0.00            | 0.00  | 0.00  | ±0.20          |
| 151                   | 150   | 150   | 151                   | 150   | 149   | 0.00            | 0.00  | -0.06 | ±0.20          |
| 210                   | 208   | 208   | 210                   | 208   | 207   | 0.00            | 0.00  | -0.04 | ±0.20          |
| 291                   | 288   | 287   | 292                   | 283   | 289   | 0.03            | -0.15 | 0.06  | ±0.20          |
| 429                   | 424   | 423   | 423                   | 419   | 416   | -0.12           | -0.10 | -0.14 | ±0.20          |
| 591                   | 584   | 583   | 587                   | 581   | 578   | -0.06           | -0.04 | -0.07 | ±0.20          |
| 882                   | 872   | 870   | 885                   | 876   | 869   | 0.03            | 0.04  | -0.01 | ±0.20          |
| 1330                  | 1320  | 1310  | 1360                  | 1340  | 1330  | 0.19            | 0.13  | 0.13  | ±0.30          |
| 1820                  | 1790  | 1790  | 1870                  | 1840  | 1830  | 0.24            | 0.24  | 0.19  | ±0.30          |
| 2950                  | 2920  | 2910  | 3070                  | 3020  | 3010  | 0.35            | 0.29  | 0.29  | ±0.40          |
| 3520                  | 3480  | 3470  | 3670                  | 3600  | 3600  | 0.36            | 0.29  | 0.32  | ±0.50          |

SPEAG H-field linearity tolerance criteria<sup>1</sup>:

- ±1.0dB for applied H-fields < 2.0A/m
- ±0.2dB for applied H-fields ≥ 2.0A/m and < 1000A/m
- ±0.3dB for applied H-fields ≥ 1000A/m and < 2000A/m
- ±0.4dB for applied H-fields ≥ 2000A/m and < 3000A/m
- ±0.5dB for applied H-fields ≥ 3000A/m

<sup>1</sup> Calibration uncertainty not taken into account (shared risk 50%).

|                                 |                                                                                                                              |                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|
| FCC ID: A3LSMS948B              |  <b>WPT RF EXPOSURE EVALUATION REPORT</b> | <b>Reviewed by:</b><br>Technical Manager |
| <b>Test Dates:</b><br>10/2/2025 | <b>Apparatus/Device:</b><br>Portable Handset                                                                                 | <b>APPENDIX C:</b><br>Page 6 of 26       |

Dynamic Range, H-field, Channel 4

| H-field/(A/m) Applied |       |       | H-field/(A/m) Reading |       |       | Difference/(dB) |       |       | Tolerance/(dB) |
|-----------------------|-------|-------|-----------------------|-------|-------|-----------------|-------|-------|----------------|
| x                     | y     | z     | x                     | y     | z     | x               | y     | z     |                |
| 0.390                 | 0.400 | 0.380 | 0.400                 | 0.410 | 0.400 | 0.22            | 0.21  | 0.45  | ±1.00          |
| 0.530                 | 0.540 | 0.520 | 0.520                 | 0.540 | 0.530 | -0.17           | 0.00  | 0.17  | ±1.00          |
| 0.730                 | 0.740 | 0.720 | 0.710                 | 0.740 | 0.730 | -0.24           | 0.00  | 0.12  | ±1.00          |
| 0.960                 | 0.970 | 0.930 | 0.940                 | 0.980 | 0.940 | -0.18           | 0.09  | 0.09  | ±1.00          |
| 1.29                  | 1.31  | 1.26  | 1.30                  | 1.31  | 1.26  | 0.07            | 0.00  | 0.00  | ±1.00          |
| 1.77                  | 1.80  | 1.74  | 1.76                  | 1.80  | 1.73  | -0.05           | 0.00  | -0.05 | ±1.00          |
| 2.36                  | 2.40  | 2.32  | 2.35                  | 2.40  | 2.32  | -0.04           | 0.00  | 0.00  | ±0.20          |
| 3.15                  | 3.20  | 3.09  | 3.14                  | 3.20  | 3.11  | -0.03           | 0.00  | 0.06  | ±0.20          |
| 4.27                  | 4.34  | 4.20  | 4.25                  | 4.34  | 4.22  | -0.04           | 0.00  | 0.04  | ±0.20          |
| 5.77                  | 5.86  | 5.69  | 5.76                  | 5.86  | 5.70  | -0.02           | 0.00  | 0.02  | ±0.20          |
| 7.75                  | 7.88  | 7.64  | 7.75                  | 7.87  | 7.67  | 0.00            | -0.01 | 0.03  | ±0.20          |
| 10.3                  | 10.5  | 10.2  | 10.3                  | 10.5  | 10.2  | 0.00            | 0.00  | 0.00  | ±0.20          |
| 14.0                  | 14.2  | 13.8  | 14.0                  | 14.2  | 13.9  | 0.00            | 0.00  | 0.06  | ±0.20          |
| 18.8                  | 19.1  | 18.6  | 18.8                  | 19.2  | 18.7  | 0.00            | 0.05  | 0.05  | ±0.20          |
| 25.4                  | 25.9  | 25.1  | 25.5                  | 25.9  | 25.2  | 0.03            | 0.00  | 0.03  | ±0.20          |
| 34.0                  | 34.5  | 33.5  | 34.2                  | 34.7  | 33.8  | 0.05            | 0.05  | 0.08  | ±0.20          |
| 45.9                  | 46.6  | 45.3  | 46.1                  | 46.8  | 45.6  | 0.04            | 0.04  | 0.06  | ±0.20          |
| 62.3                  | 63.1  | 61.5  | 62.5                  | 63.4  | 61.8  | 0.03            | 0.04  | 0.04  | ±0.20          |
| 85.5                  | 86.6  | 84.5  | 85.1                  | 86.3  | 84.2  | -0.04           | -0.03 | -0.03 | ±0.20          |
| 112                   | 113   | 111   | 112                   | 113   | 110   | 0.00            | 0.00  | -0.08 | ±0.20          |
| 154                   | 156   | 152   | 153                   | 155   | 151   | -0.06           | -0.06 | -0.06 | ±0.20          |
| 213                   | 215   | 210   | 213                   | 215   | 210   | 0.00            | 0.00  | 0.00  | ±0.20          |
| 296                   | 298   | 291   | 297                   | 293   | 293   | 0.03            | -0.15 | 0.06  | ±0.20          |
| 436                   | 439   | 429   | 431                   | 434   | 422   | -0.10           | -0.10 | -0.14 | ±0.20          |
| 601                   | 605   | 591   | 598                   | 602   | 586   | -0.04           | -0.04 | -0.07 | ±0.20          |
| 997                   | 902   | 882   | 901                   | 908   | 882   | 0.04            | 0.06  | 0.00  | ±0.20          |
| 1360                  | 1360  | 1330  | 1380                  | 1390  | 1350  | 0.13            | 0.19  | 0.13  | ±0.30          |
| 1850                  | 1860  | 1810  | 1900                  | 1910  | 1860  | 0.23            | 0.23  | 0.24  | ±0.30          |
| 3000                  | 3030  | 2950  | 3120                  | 3150  | 3050  | 0.34            | 0.34  | 0.29  | ±0.50          |
| 3580                  | 3610  | 3510  | 3740                  | 3770  | 3660  | 0.38            | 0.38  | 0.36  | ±0.50          |

SPEAG H-field linearity tolerance criteria<sup>1</sup>:

- ±1.0dB for applied H-fields < 2.0A/m
- ±0.2dB for applied H-fields ≥ 2.0A/m and < 1000A/m
- ±0.3dB for applied H-fields ≥ 1000A/m and < 2000A/m
- ±0.4dB for applied H-fields ≥ 2000A/m and < 3000A/m
- ±0.5dB for applied H-fields ≥ 3000A/m

<sup>1</sup> Calibration uncertainty not taken into account (shared risk 50%).

|                                 |                                                                                                                              |                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|
| FCC ID: A3LSMS948B              |  <b>WPT RF EXPOSURE EVALUATION REPORT</b> | <b>Reviewed by:</b><br>Technical Manager |
| <b>Test Dates:</b><br>10/2/2025 | <b>Apparatus/Device:</b><br>Portable Handset                                                                                 | <b>APPENDIX C:</b><br>Page 7 of 26       |

Dynamic Range, H-field, Channel 5

| H-field/(A/m) Applied |       |       | H-field/(A/m) Reading |       |       | Difference/(dB) |       |       | Tolerance/(dB) |
|-----------------------|-------|-------|-----------------------|-------|-------|-----------------|-------|-------|----------------|
| x                     | y     | z     | x                     | y     | z     | x               | y     | z     |                |
| 0.390                 | 0.400 | 0.390 | 0.400                 | 0.410 | 0.400 | 0.22            | 0.21  | 0.22  | ±1.00          |
| 0.530                 | 0.540 | 0.540 | 0.550                 | 0.560 | 0.550 | 0.32            | 0.32  | 0.16  | ±1.00          |
| 0.730                 | 0.750 | 0.740 | 0.750                 | 0.760 | 0.740 | 0.23            | 0.12  | 0.00  | ±1.00          |
| 0.960                 | 0.970 | 0.960 | 0.960                 | 0.980 | 0.970 | 0.00            | 0.09  | 0.09  | ±1.00          |
| 1.29                  | 1.32  | 1.30  | 1.28                  | 1.31  | 1.31  | -0.07           | -0.07 | 0.07  | ±1.00          |
| 1.77                  | 1.81  | 1.79  | 1.77                  | 1.80  | 1.79  | 0.00            | -0.05 | 0.00  | ±1.00          |
| 2.36                  | 2.41  | 2.39  | 2.38                  | 2.42  | 2.39  | 0.07            | 0.04  | 0.00  | ±0.20          |
| 3.15                  | 3.22  | 3.18  | 3.15                  | 3.20  | 3.19  | 0.00            | -0.05 | 0.03  | ±0.20          |
| 4.27                  | 4.37  | 4.33  | 4.28                  | 4.35  | 4.33  | 0.02            | -0.04 | 0.00  | ±0.20          |
| 5.77                  | 5.90  | 5.86  | 5.77                  | 5.89  | 5.85  | 0.00            | -0.01 | -0.01 | ±0.20          |
| 7.75                  | 7.93  | 7.87  | 7.76                  | 7.94  | 7.87  | 0.01            | 0.01  | 0.00  | ±0.20          |
| 10.3                  | 10.6  | 10.5  | 10.4                  | 10.6  | 10.5  | 0.08            | 0.00  | 0.00  | ±0.20          |
| 14.0                  | 14.3  | 14.2  | 14.0                  | 14.3  | 14.2  | 0.00            | 0.00  | 0.00  | ±0.20          |
| 18.9                  | 19.2  | 19.2  | 18.9                  | 19.3  | 19.2  | 0.00            | 0.05  | 0.00  | ±0.20          |
| 25.4                  | 26.0  | 25.9  | 25.5                  | 26.0  | 26.0  | 0.03            | 0.00  | 0.03  | ±0.20          |
| 34.0                  | 34.7  | 34.5  | 34.2                  | 34.9  | 34.8  | 0.05            | 0.05  | 0.08  | ±0.20          |
| 45.9                  | 46.9  | 46.7  | 46.2                  | 47.1  | 46.9  | 0.06            | 0.04  | 0.04  | ±0.20          |
| 62.3                  | 63.5  | 63.3  | 62.6                  | 63.8  | 63.6  | 0.04            | 0.04  | 0.04  | ±0.20          |
| 85.5                  | 87.2  | 87.0  | 85.2                  | 86.8  | 86.6  | -0.03           | -0.04 | -0.04 | ±0.20          |
| 112                   | 114   | 114   | 112                   | 114   | 113   | 0.00            | 0.00  | -0.08 | ±0.20          |
| 154                   | 156   | 156   | 154                   | 156   | 156   | 0.00            | 0.00  | 0.00  | ±0.20          |
| 214                   | 217   | 217   | 213                   | 216   | 216   | -0.04           | -0.04 | -0.04 | ±0.20          |
| 296                   | 300   | 300   | 297                   | 295   | 301   | 0.03            | -0.15 | 0.03  | ±0.20          |
| 437                   | 442   | 442   | 431                   | 436   | 435   | -0.12           | -0.12 | -0.14 | ±0.20          |
| 602                   | 608   | 609   | 598                   | 606   | 603   | -0.06           | -0.03 | -0.09 | ±0.20          |
| 898                   | 908   | 907   | 902                   | 912   | 908   | 0.04            | 0.04  | 0.01  | ±0.20          |
| 1360                  | 1370  | 1370  | 1380                  | 1400  | 1380  | 0.13            | 0.19  | 0.13  | ±0.30          |
| 1850                  | 1870  | 1860  | 1900                  | 1920  | 1910  | 0.23            | 0.23  | 0.23  | ±0.30          |
| 3010                  | 3050  | 3030  | 3120                  | 3160  | 3140  | 0.31            | 0.31  | 0.31  | ±0.50          |
| 3580                  | 3630  | 3620  | 3740                  | 3790  | 3760  | 0.38            | 0.37  | 0.33  | ±0.50          |

SPEAG H-field linearity tolerance criteria<sup>1</sup>:

- ±1.0dB for applied H-fields < 2.0A/m
- ±0.2dB for applied H-fields ≥ 2.0A/m and < 1000A/m
- ±0.3dB for applied H-fields ≥ 1000A/m and < 2000A/m
- ±0.4dB for applied H-fields ≥ 2000A/m and < 3000A/m
- ±0.5dB for applied H-fields ≥ 3000A/m

<sup>1</sup> Calibration uncertainty not taken into account (shared risk 50%).

|                          |                                                                                     |                                   |                                   |
|--------------------------|-------------------------------------------------------------------------------------|-----------------------------------|-----------------------------------|
| FCC ID: A3LSMS948B       |  | WPT RF EXPOSURE EVALUATION REPORT | Reviewed by:<br>Technical Manager |
| Test Dates:<br>10/2/2025 | Apparatus/Device:<br>Portable Handset                                               |                                   | APPENDIX C:<br>Page 8 of 26       |

**Dynamic Range, H-field, Channel 6**

| H-field/(A/m) Applied |       |       | H-field/(A/m) Reading |       |       | Difference/(dB) |       |       | Tolerance/(dB) |
|-----------------------|-------|-------|-----------------------|-------|-------|-----------------|-------|-------|----------------|
| x                     | y     | z     | x                     | y     | z     | x               | y     | z     |                |
| 0.400                 | 0.400 | 0.390 | 0.420                 | 0.410 | 0.390 | 0.42            | 0.21  | 0.00  | ±1.00          |
| 0.540                 | 0.540 | 0.530 | 0.550                 | 0.560 | 0.530 | 0.18            | 0.32  | 0.00  | ±1.00          |
| 0.750                 | 0.740 | 0.720 | 0.750                 | 0.770 | 0.720 | 0.00            | 0.35  | 0.00  | ±1.00          |
| 0.980                 | 0.970 | 0.950 | 0.980                 | 0.980 | 0.940 | 0.00            | 0.09  | -0.09 | ±1.00          |
| 1.32                  | 1.31  | 1.28  | 1.34                  | 1.30  | 1.27  | 0.13            | -0.07 | -0.07 | ±1.00          |
| 1.81                  | 1.80  | 1.76  | 1.81                  | 1.81  | 1.75  | 0.00            | 0.05  | -0.05 | ±1.00          |
| 2.41                  | 2.40  | 2.35  | 2.42                  | 2.43  | 2.36  | 0.04            | 0.11  | 0.04  | ±0.20          |
| 3.21                  | 3.20  | 3.13  | 3.20                  | 3.21  | 3.15  | -0.03           | 0.03  | 0.06  | ±0.20          |
| 4.36                  | 4.34  | 4.26  | 4.34                  | 4.38  | 4.29  | -0.04           | 0.08  | 0.06  | ±0.20          |
| 5.88                  | 5.86  | 5.76  | 5.88                  | 5.94  | 5.81  | 0.00            | 0.12  | 0.08  | ±0.20          |
| 7.90                  | 7.88  | 7.74  | 7.90                  | 7.98  | 7.79  | 0.00            | 0.11  | 0.06  | ±0.20          |
| 10.6                  | 10.5  | 10.3  | 10.6                  | 10.6  | 10.4  | 0.00            | 0.08  | 0.08  | ±0.20          |
| 14.3                  | 14.2  | 14.0  | 14.3                  | 14.3  | 14.1  | 0.00            | 0.06  | 0.06  | ±0.20          |
| 19.2                  | 19.1  | 18.9  | 19.2                  | 19.3  | 18.9  | 0.00            | 0.09  | 0.00  | ±0.20          |
| 25.9                  | 25.9  | 25.4  | 26.0                  | 25.9  | 25.6  | 0.03            | 0.00  | 0.07  | ±0.20          |
| 34.6                  | 34.5  | 34.0  | 34.9                  | 34.7  | 34.2  | 0.07            | 0.05  | 0.05  | ±0.20          |
| 46.8                  | 46.6  | 45.9  | 47.1                  | 46.8  | 46.2  | 0.06            | 0.04  | 0.06  | ±0.20          |
| 63.5                  | 63.2  | 62.3  | 63.8                  | 63.5  | 62.6  | 0.04            | 0.04  | 0.04  | ±0.20          |
| 87.2                  | 86.7  | 85.6  | 86.8                  | 86.3  | 85.2  | -0.04           | -0.04 | -0.04 | ±0.20          |
| 114                   | 113   | 112   | 114                   | 113   | 112   | 0.00            | 0.00  | 0.00  | ±0.20          |
| 157                   | 156   | 154   | 157                   | 155   | 153   | 0.00            | -0.06 | -0.06 | ±0.20          |
| 218                   | 215   | 213   | 217                   | 215   | 213   | -0.04           | 0.00  | 0.00  | ±0.20          |
| 302                   | 298   | 295   | 303                   | 293   | 297   | 0.03            | -0.15 | 0.06  | ±0.20          |
| 445                   | 439   | 435   | 439                   | 434   | 428   | -0.12           | -0.10 | -0.14 | ±0.20          |
| 614                   | 605   | 599   | 609                   | 602   | 594   | -0.07           | -0.04 | -0.07 | ±0.20          |
| 915                   | 903   | 893   | 918                   | 907   | 893   | 0.03            | 0.04  | 0.00  | ±0.20          |
| 1380                  | 1370  | 1350  | 1410                  | 1390  | 1370  | 0.19            | 0.13  | 0.13  | ±0.30          |
| 1880                  | 1860  | 1840  | 1940                  | 1910  | 1880  | 0.27            | 0.23  | 0.19  | ±0.30          |
| 3070                  | 3030  | 2990  | 3180                  | 3140  | 3090  | 0.31            | 0.31  | 0.29  | ±0.50          |
| 3650                  | 3610  | 3560  | 3810                  | 3770  | 3700  | 0.37            | 0.38  | 0.34  | ±0.50          |

**SPEAG H-field linearity tolerance criteria<sup>1</sup>:**

- ±1.0dB for applied H-fields < 2.0 A/m
- ±0.2dB for applied H-fields ≥ 2.0 A/m and < 1000 A/m
- ±0.3dB for applied H-fields ≥ 1000 A/m and < 2000 A/m
- ±0.4dB for applied H-fields ≥ 2000 A/m and < 3000 A/m
- ±0.5dB for applied H-fields ≥ 3000 A/m

<sup>1</sup> Calibration uncertainty not taken into account (shared risk 50%).

|                                 |                                                                                                                              |                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|
| FCC ID: A3LSMS948B              |  <b>WPT RF EXPOSURE EVALUATION REPORT</b> | <b>Reviewed by:</b><br>Technical Manager |
| <b>Test Dates:</b><br>10/2/2025 | <b>Apparatus/Device:</b><br>Portable Handset                                                                                 | <b>APPENDIX C:</b><br>Page 9 of 26       |

Dynamic Range, H-field, Channel 7

| H-field/(A/m) Applied |       |       | H-field/(A/m) Reading |       |       | Difference/(dB) |       |       | Tolerance/(dB) |
|-----------------------|-------|-------|-----------------------|-------|-------|-----------------|-------|-------|----------------|
| x                     | y     | z     | x                     | y     | z     | x               | y     | z     |                |
| 0.400                 | 0.390 | 0.370 | 0.410                 | 0.430 | 0.390 | 0.21            | 0.85  | 0.46  | ±1.00          |
| 0.540                 | 0.530 | 0.510 | 0.550                 | 0.560 | 0.520 | 0.16            | 0.48  | 0.17  | ±1.00          |
| 0.740                 | 0.730 | 0.700 | 0.750                 | 0.740 | 0.710 | 0.12            | 0.12  | 0.12  | ±1.00          |
| 0.960                 | 0.950 | 0.910 | 0.970                 | 0.990 | 0.940 | 0.09            | 0.36  | 0.28  | ±1.00          |
| 1.30                  | 1.28  | 1.24  | 1.32                  | 1.32  | 1.26  | 0.13            | 0.27  | 0.14  | ±1.00          |
| 1.78                  | 1.76  | 1.70  | 1.80                  | 1.79  | 1.72  | 0.10            | 0.15  | 0.10  | ±1.00          |
| 2.37                  | 2.35  | 2.26  | 2.40                  | 2.39  | 2.28  | 0.11            | 0.15  | 0.08  | ±0.20          |
| 3.16                  | 3.13  | 3.02  | 3.18                  | 3.17  | 3.05  | 0.05            | 0.11  | 0.09  | ±0.20          |
| 4.29                  | 4.25  | 4.11  | 4.30                  | 4.28  | 4.12  | 0.02            | 0.06  | 0.02  | ±0.20          |
| 5.80                  | 5.74  | 5.56  | 5.82                  | 5.77  | 5.57  | 0.03            | 0.05  | 0.02  | ±0.20          |
| 7.79                  | 7.72  | 7.47  | 7.83                  | 7.75  | 7.49  | 0.04            | 0.03  | 0.02  | ±0.20          |
| 10.4                  | 10.3  | 9.97  | 10.5                  | 10.3  | 10.0  | 0.08            | 0.00  | 0.03  | ±0.20          |
| 14.1                  | 13.9  | 13.5  | 14.1                  | 13.9  | 13.5  | 0.00            | 0.00  | 0.00  | ±0.20          |
| 18.9                  | 18.7  | 18.2  | 19.0                  | 18.8  | 18.2  | 0.05            | 0.05  | 0.00  | ±0.20          |
| 25.6                  | 25.3  | 24.6  | 25.7                  | 25.3  | 24.6  | 0.03            | 0.00  | 0.00  | ±0.20          |
| 34.1                  | 33.8  | 32.8  | 34.4                  | 34.0  | 33.0  | 0.08            | 0.05  | 0.05  | ±0.20          |
| 46.1                  | 45.6  | 44.3  | 46.4                  | 45.8  | 44.5  | 0.06            | 0.04  | 0.04  | ±0.20          |
| 62.6                  | 61.9  | 60.1  | 62.9                  | 62.1  | 60.4  | 0.04            | 0.03  | 0.04  | ±0.20          |
| 85.9                  | 84.9  | 82.6  | 85.6                  | 84.6  | 82.3  | -0.03           | -0.03 | -0.03 | ±0.20          |
| 113                   | 111   | 108   | 112                   | 111   | 108   | -0.08           | 0.00  | 0.00  | ±0.20          |
| 155                   | 152   | 148   | 154                   | 152   | 148   | -0.06           | 0.00  | 0.00  | ±0.20          |
| 215                   | 211   | 206   | 214                   | 211   | 205   | -0.04           | 0.00  | -0.04 | ±0.20          |
| 297                   | 292   | 285   | 299                   | 287   | 286   | 0.06            | -0.15 | 0.03  | ±0.20          |
| 439                   | 430   | 419   | 433                   | 425   | 412   | -0.12           | -0.10 | -0.15 | ±0.20          |
| 605                   | 592   | 578   | 600                   | 590   | 572   | -0.07           | -0.03 | -0.09 | ±0.20          |
| 902                   | 884   | 861   | 905                   | 889   | 861   | 0.03            | 0.05  | 0.00  | ±0.20          |
| 1360                  | 1340  | 1300  | 1390                  | 1360  | 1320  | 0.19            | 0.13  | 0.13  | ±0.30          |
| 1860                  | 1820  | 1770  | 1910                  | 1880  | 1810  | 0.23            | 0.28  | 0.19  | ±0.30          |
| 3020                  | 2960  | 2880  | 3130                  | 3080  | 2980  | 0.31            | 0.35  | 0.30  | ±0.50          |
| 3600                  | 3530  | 3430  | 3750                  | 3690  | 3570  | 0.35            | 0.39  | 0.35  | ±0.50          |

SPEAG H-field linearity tolerance criteria<sup>1</sup>:  
±1.0dB for applied H-fields < 2.0A/m  
±0.2dB for applied H-fields ≥ 2.0A/m and < 1000A/m  
±0.3dB for applied H-fields ≥ 1000A/m and < 2000A/m  
±0.4dB for applied H-fields ≥ 2000A/m and < 3000A/m  
±0.5dB for applied H-fields ≥ 3000A/m

<sup>1</sup>Calibration uncertainty not taken into account (shared risk 50%).

|                                 |                                                                                                                              |                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|
| FCC ID: A3LSMS948B              |  <b>WPT RF EXPOSURE EVALUATION REPORT</b> | <b>Reviewed by:</b><br>Technical Manager |
| <b>Test Dates:</b><br>10/2/2025 | <b>Apparatus/Device:</b><br>Portable Handset                                                                                 | <b>APPENDIX C:</b><br>Page 10 of 26      |

Dynamic Range, E-field, Channel 0

| E-field/(V/m) Applied |       |       | E-field/(V/m) Reading |       |       | Difference/(dB) |       |       | Tolerance/(dB) |       |       |
|-----------------------|-------|-------|-----------------------|-------|-------|-----------------|-------|-------|----------------|-------|-------|
| x                     | y     | z     | x                     | y     | z     | x               | y     | z     | x              | y     | z     |
| 0.380                 | 0.220 | 0.080 | 0.370                 | 0.210 | 0.110 | -0.23           | -0.40 | 2.77  | ±5.00          | ±5.00 | ±5.00 |
| 0.510                 | 0.300 | 0.110 | 0.520                 | 0.310 | 0.110 | 0.17            | 0.28  | 0.00  | ±5.00          | ±5.00 | ±5.00 |
| 0.710                 | 0.410 | 0.150 | 0.710                 | 0.410 | 0.150 | 0.00            | 0.00  | 0.00  | ±5.00          | ±5.00 | ±5.00 |
| 0.920                 | 0.540 | 0.200 | 0.940                 | 0.550 | 0.220 | 0.19            | 0.16  | 0.83  | ±5.00          | ±5.00 | ±5.00 |
| 1.25                  | 0.730 | 0.270 | 1.26                  | 0.740 | 0.290 | 0.07            | 0.12  | 0.62  | ±5.00          | ±5.00 | ±5.00 |
| 1.71                  | 1.00  | 0.370 | 1.70                  | 1.00  | 0.390 | -0.05           | 0.00  | 0.46  | ±5.00          | ±5.00 | ±5.00 |
| 2.28                  | 1.34  | 0.490 | 2.31                  | 1.34  | 0.520 | 0.11            | 0.00  | 0.52  | ±1.00          | ±5.00 | ±5.00 |
| 3.05                  | 1.79  | 0.660 | 3.05                  | 1.80  | 0.630 | 0.00            | 0.05  | -0.40 | ±1.00          | ±5.00 | ±5.00 |
| 4.14                  | 2.43  | 0.890 | 4.14                  | 2.41  | 0.870 | 0.00            | -0.07 | -0.20 | ±1.00          | ±1.00 | ±5.00 |
| 5.59                  | 3.28  | 1.21  | 5.62                  | 3.27  | 1.20  | 0.05            | -0.03 | -0.07 | ±1.00          | ±1.00 | ±5.00 |
| 7.51                  | 4.41  | 1.62  | 7.54                  | 4.39  | 1.61  | 0.03            | -0.04 | -0.05 | ±1.00          | ±1.00 | ±5.00 |
| 10.0                  | 5.88  | 2.16  | 10.1                  | 5.87  | 2.16  | 0.09            | -0.01 | 0.00  | ±1.00          | ±1.00 | ±1.00 |
| 13.5                  | 7.94  | 2.92  | 13.6                  | 7.93  | 2.91  | 0.06            | -0.01 | -0.03 | ±1.00          | ±1.00 | ±1.00 |
| 18.2                  | 10.7  | 3.94  | 18.3                  | 10.7  | 3.91  | 0.05            | 0.00  | -0.07 | ±1.00          | ±1.00 | ±1.00 |
| 24.6                  | 14.5  | 5.31  | 24.7                  | 14.4  | 5.29  | 0.04            | -0.06 | -0.03 | ±1.00          | ±1.00 | ±1.00 |
| 32.8                  | 19.3  | 7.10  | 33.1                  | 19.3  | 7.01  | 0.08            | 0.00  | -0.11 | ±1.00          | ±1.00 | ±1.00 |
| 44.4                  | 26.0  | 9.59  | 44.8                  | 26.1  | 9.50  | 0.08            | 0.03  | -0.08 | ±1.00          | ±1.00 | ±1.00 |
| 60.2                  | 35.3  | 13.0  | 60.6                  | 35.3  | 12.9  | 0.06            | 0.00  | -0.07 | ±1.00          | ±1.00 | ±1.00 |
| 82.6                  | 48.4  | 17.9  | 82.5                  | 48.1  | 17.5  | -0.01           | -0.05 | -0.20 | ±1.00          | ±1.00 | ±1.00 |
| 108                   | 63.4  | 23.4  | 108                   | 62.9  | 22.9  | 0.00            | -0.07 | -0.19 | ±1.00          | ±1.00 | ±1.00 |
| 148                   | 87.0  | 32.2  | 148                   | 86.4  | 31.5  | 0.00            | -0.06 | -0.19 | ±1.00          | ±1.00 | ±1.00 |
| 205                   | 120   | 44.6  | 206                   | 120   | 43.8  | 0.04            | 0.00  | -0.16 | ±1.00          | ±1.00 | ±1.00 |
| 284                   | 167   | 61.8  | 286                   | 167   | 61.1  | 0.06            | 0.00  | -0.10 | ±1.00          | ±1.00 | ±1.00 |
| 418                   | 246   | 91.2  | 400                   | 234   | 90.6  | -0.38           | -0.43 | -0.06 | ±1.00          | ±1.00 | ±1.00 |
| 576                   | 338   | 126   | 556                   | 325   | 126   | -0.31           | -0.34 | 0.00  | ±1.00          | ±1.00 | ±1.00 |
| 860                   | 505   | 187   | 838                   | 490   | 190   | -0.23           | -0.26 | 0.14  | ±1.00          | ±1.00 | ±1.00 |
| 1300                  | 763   | 284   | 1280                  | 752   | 291   | -0.13           | -0.13 | 0.21  | ±1.00          | ±1.00 | ±1.00 |
| 1770                  | 1040  | 386   | 1770                  | 1040  | 401   | 0.00            | 0.00  | 0.33  | ±1.00          | ±1.00 | ±1.00 |
| 2880                  | 1690  | 628   | 2920                  | 1710  | 630   | 0.12            | 0.10  | 0.03  | ±1.00          | ±1.00 | ±1.00 |
| 3440                  | 2020  | 748   | 3500                  | 2040  | 755   | 0.15            | 0.09  | 0.08  | ±1.00          | ±1.00 | ±1.00 |

SPEAG E-field linearity tolerance criteria<sup>1</sup>:  
±5.0dB for applied E-field < 2 V/m  
±1.0dB for applied E-field ≥ 2 V/m

<sup>1</sup> Calibration uncertainty not taken into account (shared risk 50%).

|                                 |                                                                                                                              |                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|
| FCC ID: A3LSMS948B              |  <b>WPT RF EXPOSURE EVALUATION REPORT</b> | <b>Reviewed by:</b><br>Technical Manager |
| <b>Test Dates:</b><br>10/2/2025 | <b>Apparatus/Device:</b><br>Portable Handset                                                                                 | <b>APPENDIX C:</b><br>Page 11 of 26      |

## Frequency Response

### Frequency Response, H-field, Channel 0

| f(Hz)    | H-field/(A/m) Applied |      |      | H-field/(A/m) Reading |      |      | Difference/(dB) |       |       | Tolerance/(dB) |
|----------|-----------------------|------|------|-----------------------|------|------|-----------------|-------|-------|----------------|
|          | x                     | y    | z    | x                     | y    | z    | x               | y     | z     |                |
| 3000     | 1.54                  | 1.54 | 1.54 | 1.54                  | 1.54 | 1.54 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 3200     | 1.54                  | 1.54 | 1.54 | 1.54                  | 1.54 | 1.54 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 4000     | 1.53                  | 1.53 | 1.53 | 1.54                  | 1.53 | 1.53 | 0.06            | 0.00  | 0.00  | ±0.3           |
| 5200     | 1.52                  | 1.52 | 1.52 | 1.52                  | 1.52 | 1.51 | 0.00            | 0.00  | -0.06 | ±0.3           |
| 6600     | 1.51                  | 1.51 | 1.51 | 1.51                  | 1.52 | 1.51 | 0.00            | 0.06  | 0.00  | ±0.3           |
| 8200     | 1.50                  | 1.50 | 1.50 | 1.51                  | 1.51 | 1.50 | 0.06            | 0.06  | 0.00  | ±0.3           |
| 9000     | 1.50                  | 1.50 | 1.50 | 1.50                  | 1.50 | 1.50 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 10600    | 4.21                  | 4.17 | 4.16 | 4.22                  | 4.18 | 4.16 | 0.02            | 0.02  | 0.00  | ±0.3           |
| 13400    | 4.21                  | 4.18 | 4.18 | 4.24                  | 4.19 | 4.19 | 0.06            | 0.02  | 0.02  | ±0.3           |
| 17000    | 4.21                  | 4.18 | 4.18 | 4.22                  | 4.20 | 4.17 | 0.02            | 0.04  | -0.02 | ±0.3           |
| 21400    | 4.24                  | 4.21 | 4.20 | 4.24                  | 4.21 | 4.20 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 27200    | 4.23                  | 4.20 | 4.19 | 4.24                  | 4.19 | 4.20 | 0.02            | -0.02 | 0.02  | ±0.3           |
| 34400    | 4.24                  | 4.21 | 4.21 | 4.24                  | 4.21 | 4.21 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 40000    | 4.23                  | 4.21 | 4.21 | 4.25                  | 4.21 | 4.21 | 0.04            | 0.00  | 0.00  | ±0.3           |
| 43600    | 4.23                  | 4.21 | 4.20 | 4.23                  | 4.21 | 4.20 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 55400    | 4.22                  | 4.20 | 4.19 | 4.22                  | 4.20 | 4.20 | 0.00            | 0.00  | 0.02  | ±0.3           |
| 70000    | 4.21                  | 4.19 | 4.19 | 4.21                  | 4.20 | 4.18 | 0.00            | 0.02  | -0.02 | ±0.3           |
| 88800    | 4.20                  | 4.18 | 4.18 | 4.19                  | 4.18 | 4.18 | -0.02           | 0.00  | 0.00  | ±0.3           |
| 112400   | 4.19                  | 4.17 | 4.17 | 4.19                  | 4.17 | 4.17 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 142400   | 4.17                  | 4.16 | 4.15 | 4.18                  | 4.16 | 4.15 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 161750   | 4.16                  | 4.14 | 4.14 | 4.15                  | 4.14 | 4.14 | -0.02           | 0.00  | 0.00  | ±0.3           |
| 180400   | 4.14                  | 4.13 | 4.13 | 4.13                  | 4.13 | 4.13 | -0.02           | 0.00  | 0.00  | ±0.3           |
| 228400   | 4.12                  | 4.10 | 4.10 | 4.12                  | 4.10 | 4.10 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 289400   | 4.08                  | 4.07 | 4.07 | 4.08                  | 4.07 | 4.07 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 366400   | 4.04                  | 4.03 | 4.03 | 4.06                  | 4.03 | 4.03 | 0.04            | 0.00  | 0.00  | ±0.3           |
| 400000   | 4.02                  | 4.02 | 4.01 | 4.02                  | 4.01 | 4.01 | 0.00            | -0.02 | 0.00  | ±0.3           |
| 464000   | 4.00                  | 3.99 | 3.99 | 4.00                  | 3.99 | 3.99 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 587800   | 3.95                  | 3.94 | 3.94 | 3.95                  | 3.94 | 3.94 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 744200   | 3.91                  | 3.90 | 3.90 | 3.93                  | 3.90 | 3.90 | 0.04            | 0.00  | 0.00  | ±0.3           |
| 942600   | 3.89                  | 3.89 | 3.88 | 3.90                  | 3.89 | 3.88 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 1193600  | 3.87                  | 3.86 | 3.86 | 3.89                  | 3.86 | 3.86 | 0.04            | 0.00  | 0.00  | ±0.3           |
| 1511600  | 3.85                  | 3.85 | 3.85 | 3.86                  | 3.85 | 3.85 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 1914400  | 3.84                  | 3.84 | 3.83 | 3.86                  | 3.84 | 3.83 | 0.05            | 0.00  | 0.00  | ±0.3           |
| 2424400  | 3.82                  | 3.82 | 3.81 | 3.83                  | 3.82 | 3.81 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 3070200  | 3.79                  | 3.79 | 3.77 | 3.79                  | 3.79 | 3.78 | 0.00            | 0.00  | 0.02  | ±0.3           |
| 3888000  | 3.74                  | 3.73 | 3.72 | 3.74                  | 3.74 | 3.72 | 0.00            | 0.02  | 0.00  | ±0.3           |
| 4000000  | 3.73                  | 3.72 | 3.71 | 3.73                  | 3.73 | 3.71 | 0.00            | 0.02  | 0.00  | ±0.3           |
| 4923800  | 3.66                  | 3.65 | 3.64 | 3.66                  | 3.65 | 3.64 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 6235400  | 3.54                  | 3.54 | 3.53 | 3.55                  | 3.54 | 3.53 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 7896400  | 3.41                  | 3.40 | 3.39 | 3.42                  | 3.41 | 3.40 | 0.03            | 0.03  | 0.03  | ±0.3           |
| 10000000 | 3.25                  | 3.24 | 3.23 | 3.25                  | 3.27 | 3.24 | 0.00            | 0.08  | 0.03  | ±0.3           |

SPEAG H-field frequency response tolerance criteria<sup>1</sup>:  
±0.3dB for applied H-fields at calibration points from 3kHz to 10MHz

<sup>1</sup> Calibration uncertainty not taken into account (shared risk 50%).

|                                 |                                                                                                                              |                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|
| FCC ID: A3LSMS948B              |  <b>WPT RF EXPOSURE EVALUATION REPORT</b> | <b>Reviewed by:</b><br>Technical Manager |
| <b>Test Dates:</b><br>10/2/2025 | <b>Apparatus/Device:</b><br>Portable Handset                                                                                 | <b>APPENDIX C:</b><br>Page 12 of 26      |

Frequency Response, H-field, Channel 1

| f/(Hz)   | H-field/(A/m) Applied |      |      | H-field/(A/m) Reading |      |      | Difference/(dB) |       |       | Tolerance/(dB) |
|----------|-----------------------|------|------|-----------------------|------|------|-----------------|-------|-------|----------------|
|          | x                     | y    | z    | x                     | y    | z    | x               | y     | z     |                |
| 3000     | 1.54                  | 1.54 | 1.54 | 1.54                  | 1.55 | 1.54 | 0.00            | 0.06  | 0.00  | ±0.3           |
| 3200     | 1.54                  | 1.54 | 1.54 | 1.54                  | 1.54 | 1.53 | 0.00            | 0.00  | -0.06 | ±0.3           |
| 4000     | 1.53                  | 1.53 | 1.53 | 1.53                  | 1.52 | 1.53 | 0.00            | -0.06 | 0.00  | ±0.3           |
| 5200     | 1.52                  | 1.52 | 1.52 | 1.52                  | 1.52 | 1.51 | 0.00            | 0.00  | -0.06 | ±0.3           |
| 6600     | 1.51                  | 1.51 | 1.51 | 1.50                  | 1.52 | 1.51 | -0.06           | 0.06  | 0.00  | ±0.3           |
| 8200     | 1.50                  | 1.50 | 1.50 | 1.51                  | 1.50 | 1.50 | 0.06            | 0.00  | 0.00  | ±0.3           |
| 9000     | 1.50                  | 1.50 | 1.50 | 1.50                  | 1.50 | 1.50 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 10600    | 4.21                  | 4.17 | 4.16 | 4.25                  | 4.18 | 4.17 | 0.08            | 0.02  | 0.02  | ±0.3           |
| 13400    | 4.21                  | 4.18 | 4.18 | 4.22                  | 4.18 | 4.18 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 17000    | 4.21                  | 4.18 | 4.18 | 4.23                  | 4.18 | 4.17 | 0.04            | 0.00  | -0.02 | ±0.3           |
| 21400    | 4.24                  | 4.21 | 4.20 | 4.25                  | 4.21 | 4.20 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 27200    | 4.23                  | 4.20 | 4.19 | 4.23                  | 4.21 | 4.20 | 0.00            | 0.02  | 0.02  | ±0.3           |
| 34400    | 4.24                  | 4.21 | 4.21 | 4.24                  | 4.21 | 4.21 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 40000    | 4.23                  | 4.21 | 4.21 | 4.24                  | 4.21 | 4.20 | 0.02            | 0.00  | -0.02 | ±0.3           |
| 43600    | 4.23                  | 4.21 | 4.20 | 4.24                  | 4.21 | 4.19 | 0.02            | 0.00  | -0.02 | ±0.3           |
| 55400    | 4.22                  | 4.20 | 4.19 | 4.22                  | 4.20 | 4.19 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 70000    | 4.21                  | 4.19 | 4.19 | 4.22                  | 4.19 | 4.19 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 88800    | 4.20                  | 4.18 | 4.18 | 4.21                  | 4.18 | 4.17 | 0.02            | 0.00  | -0.02 | ±0.3           |
| 112400   | 4.19                  | 4.17 | 4.17 | 4.20                  | 4.17 | 4.17 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 142400   | 4.17                  | 4.16 | 4.15 | 4.18                  | 4.15 | 4.14 | 0.02            | -0.02 | -0.02 | ±0.3           |
| 161750   | 4.16                  | 4.14 | 4.14 | 4.16                  | 4.14 | 4.14 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 180400   | 4.14                  | 4.13 | 4.13 | 4.15                  | 4.13 | 4.13 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 228400   | 4.12                  | 4.10 | 4.10 | 4.12                  | 4.10 | 4.09 | 0.00            | 0.00  | -0.02 | ±0.3           |
| 289400   | 4.08                  | 4.07 | 4.07 | 4.09                  | 4.07 | 4.07 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 366400   | 4.04                  | 4.03 | 4.03 | 4.05                  | 4.03 | 4.03 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 400000   | 4.02                  | 4.02 | 4.01 | 4.04                  | 4.01 | 4.01 | 0.04            | -0.02 | 0.00  | ±0.3           |
| 464000   | 4.00                  | 3.99 | 3.99 | 4.01                  | 4.00 | 3.99 | 0.02            | 0.02  | 0.00  | ±0.3           |
| 587800   | 3.95                  | 3.94 | 3.94 | 3.95                  | 3.94 | 3.94 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 744200   | 3.91                  | 3.90 | 3.90 | 3.91                  | 3.89 | 3.90 | 0.00            | -0.02 | 0.00  | ±0.3           |
| 942600   | 3.89                  | 3.89 | 3.88 | 3.90                  | 3.89 | 3.88 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 1193600  | 3.87                  | 3.86 | 3.86 | 3.87                  | 3.86 | 3.85 | 0.00            | 0.00  | -0.02 | ±0.3           |
| 1511600  | 3.85                  | 3.85 | 3.85 | 3.87                  | 3.84 | 3.85 | 0.05            | -0.02 | 0.00  | ±0.3           |
| 1914400  | 3.84                  | 3.84 | 3.83 | 3.85                  | 3.84 | 3.83 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 2424400  | 3.82                  | 3.82 | 3.81 | 3.82                  | 3.82 | 3.81 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 3070200  | 3.79                  | 3.79 | 3.77 | 3.79                  | 3.79 | 3.78 | 0.00            | 0.00  | 0.02  | ±0.3           |
| 3888000  | 3.74                  | 3.73 | 3.72 | 3.74                  | 3.74 | 3.72 | 0.00            | 0.02  | 0.00  | ±0.3           |
| 4000000  | 3.73                  | 3.72 | 3.71 | 3.73                  | 3.72 | 3.71 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 4923800  | 3.66                  | 3.65 | 3.64 | 3.66                  | 3.65 | 3.64 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 6235400  | 3.54                  | 3.54 | 3.53 | 3.54                  | 3.54 | 3.53 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 7896400  | 3.41                  | 3.40 | 3.39 | 3.42                  | 3.41 | 3.40 | 0.03            | 0.03  | 0.03  | ±0.3           |
| 10000000 | 3.25                  | 3.24 | 3.23 | 3.25                  | 3.24 | 3.23 | 0.00            | 0.00  | 0.00  | ±0.3           |

SPEAG H-field frequency response tolerance criteria<sup>1</sup>:  
±0.3dB for applied H-fields at calibration points from 3kHz to 10MHz

<sup>1</sup>Calibration uncertainty not taken into account (shared risk 50%).

|                          |                                                                                     |                                   |                                   |
|--------------------------|-------------------------------------------------------------------------------------|-----------------------------------|-----------------------------------|
| FCC ID: A3LSMS948B       |  | WPT RF EXPOSURE EVALUATION REPORT | Reviewed by:<br>Technical Manager |
| Test Dates:<br>10/2/2025 | Apparatus/Device:<br>Portable Handset                                               |                                   | APPENDIX C:<br>Page 13 of 26      |

Frequency Response, H-field, Channel 2

| f/(Hz)   | H-field/(A/m) Applied |      |      | H-field/(A/m) Reading |      |      | Difference/(dB) |       |       | Tolerance/(dB) |
|----------|-----------------------|------|------|-----------------------|------|------|-----------------|-------|-------|----------------|
|          | x                     | y    | z    | x                     | y    | z    | x               | y     | z     |                |
| 3000     | 1.54                  | 1.54 | 1.54 | 1.54                  | 1.55 | 1.54 | 0.00            | 0.06  | 0.00  | ±0.3           |
| 3200     | 1.54                  | 1.54 | 1.54 | 1.52                  | 1.54 | 1.53 | -0.11           | 0.00  | -0.06 | ±0.3           |
| 4000     | 1.53                  | 1.53 | 1.53 | 1.54                  | 1.54 | 1.53 | 0.06            | 0.06  | 0.00  | ±0.3           |
| 5200     | 1.52                  | 1.52 | 1.52 | 1.52                  | 1.52 | 1.51 | 0.00            | 0.00  | -0.06 | ±0.3           |
| 6600     | 1.51                  | 1.51 | 1.51 | 1.51                  | 1.52 | 1.51 | 0.00            | 0.06  | 0.00  | ±0.3           |
| 8200     | 1.50                  | 1.50 | 1.50 | 1.50                  | 1.50 | 1.50 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 9000     | 1.50                  | 1.50 | 1.50 | 1.51                  | 1.50 | 1.50 | 0.06            | 0.00  | 0.00  | ±0.3           |
| 10600    | 4.21                  | 4.17 | 4.16 | 4.19                  | 4.19 | 4.17 | -0.04           | 0.04  | 0.02  | ±0.3           |
| 13400    | 4.21                  | 4.18 | 4.18 | 4.22                  | 4.17 | 4.19 | 0.02            | -0.02 | 0.02  | ±0.3           |
| 17000    | 4.21                  | 4.18 | 4.18 | 4.22                  | 4.18 | 4.17 | 0.02            | 0.00  | -0.02 | ±0.3           |
| 21400    | 4.24                  | 4.21 | 4.20 | 4.22                  | 4.21 | 4.20 | -0.04           | 0.00  | 0.00  | ±0.3           |
| 27200    | 4.23                  | 4.20 | 4.19 | 4.24                  | 4.20 | 4.20 | 0.02            | 0.00  | 0.02  | ±0.3           |
| 34400    | 4.24                  | 4.21 | 4.21 | 4.24                  | 4.22 | 4.21 | 0.00            | 0.02  | 0.00  | ±0.3           |
| 40000    | 4.23                  | 4.21 | 4.21 | 4.24                  | 4.21 | 4.21 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 43600    | 4.23                  | 4.21 | 4.20 | 4.22                  | 4.20 | 4.21 | -0.02           | -0.02 | 0.02  | ±0.3           |
| 55400    | 4.22                  | 4.20 | 4.19 | 4.22                  | 4.20 | 4.19 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 70000    | 4.21                  | 4.19 | 4.19 | 4.22                  | 4.20 | 4.20 | 0.02            | 0.02  | 0.02  | ±0.3           |
| 88800    | 4.20                  | 4.18 | 4.18 | 4.20                  | 4.18 | 4.19 | 0.00            | 0.00  | 0.02  | ±0.3           |
| 112400   | 4.19                  | 4.17 | 4.17 | 4.19                  | 4.17 | 4.17 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 142400   | 4.17                  | 4.16 | 4.15 | 4.18                  | 4.16 | 4.16 | 0.02            | 0.00  | 0.02  | ±0.3           |
| 161750   | 4.16                  | 4.14 | 4.14 | 4.16                  | 4.14 | 4.14 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 180400   | 4.14                  | 4.13 | 4.13 | 4.15                  | 4.13 | 4.14 | 0.02            | 0.00  | 0.02  | ±0.3           |
| 228400   | 4.12                  | 4.10 | 4.10 | 4.12                  | 4.10 | 4.10 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 289400   | 4.08                  | 4.07 | 4.07 | 4.08                  | 4.07 | 4.07 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 366400   | 4.04                  | 4.03 | 4.03 | 4.05                  | 4.03 | 4.04 | 0.02            | 0.00  | 0.02  | ±0.3           |
| 400000   | 4.02                  | 4.02 | 4.01 | 4.03                  | 4.01 | 4.01 | 0.02            | -0.02 | 0.00  | ±0.3           |
| 464000   | 4.00                  | 3.99 | 3.99 | 4.01                  | 4.00 | 4.00 | 0.02            | 0.02  | 0.02  | ±0.3           |
| 587800   | 3.95                  | 3.94 | 3.94 | 3.95                  | 3.94 | 3.93 | 0.00            | 0.00  | -0.02 | ±0.3           |
| 744200   | 3.91                  | 3.90 | 3.90 | 3.91                  | 3.90 | 3.90 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 942600   | 3.89                  | 3.89 | 3.88 | 3.90                  | 3.89 | 3.88 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 1193600  | 3.87                  | 3.86 | 3.86 | 3.87                  | 3.86 | 3.86 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 1511600  | 3.85                  | 3.85 | 3.85 | 3.86                  | 3.85 | 3.85 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 1914400  | 3.84                  | 3.84 | 3.83 | 3.84                  | 3.84 | 3.83 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 2424400  | 3.82                  | 3.82 | 3.81 | 3.83                  | 3.82 | 3.81 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 3070200  | 3.79                  | 3.79 | 3.77 | 3.79                  | 3.79 | 3.78 | 0.00            | 0.00  | 0.02  | ±0.3           |
| 3888000  | 3.74                  | 3.73 | 3.72 | 3.74                  | 3.74 | 3.72 | 0.00            | 0.02  | 0.00  | ±0.3           |
| 4000000  | 3.73                  | 3.72 | 3.71 | 3.73                  | 3.72 | 3.71 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 4923800  | 3.66                  | 3.65 | 3.64 | 3.66                  | 3.66 | 3.65 | 0.00            | 0.02  | 0.02  | ±0.3           |
| 6235400  | 3.54                  | 3.54 | 3.53 | 3.54                  | 3.54 | 3.54 | 0.00            | 0.00  | 0.02  | ±0.3           |
| 7896400  | 3.41                  | 3.40 | 3.39 | 3.42                  | 3.41 | 3.40 | 0.03            | 0.03  | 0.03  | ±0.3           |
| 10000000 | 3.25                  | 3.24 | 3.23 | 3.25                  | 3.24 | 3.24 | 0.00            | 0.00  | 0.03  | ±0.3           |

SPEAG H-field frequency response tolerance criteria<sup>1</sup>:  
±0.3dB for applied H-fields at calibration points from 3kHz to 10MHz

<sup>1</sup> Calibration uncertainty not taken into account (shared risk 50%).

|                                 |                                                                                                                              |                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|
| FCC ID: A3LSMS948B              |  <b>WPT RF EXPOSURE EVALUATION REPORT</b> | <b>Reviewed by:</b><br>Technical Manager |
| <b>Test Dates:</b><br>10/2/2025 | <b>Apparatus/Device:</b><br>Portable Handset                                                                                 | APPENDIX C:<br>Page 14 of 26             |

Frequency Response, H-field, Channel 3

| f/(Hz)   | H-field/(A/m) Applied |      |      | H-field/(A/m) Reading |      |      | Difference/(dB) |       |       | Tolerance/(dB) |
|----------|-----------------------|------|------|-----------------------|------|------|-----------------|-------|-------|----------------|
|          | x                     | y    | z    | x                     | y    | z    | x               | y     | z     |                |
| 3000     | 1.54                  | 1.54 | 1.54 | 1.53                  | 1.53 | 1.54 | -0.06           | -0.06 | 0.00  | ±0.3           |
| 3200     | 1.54                  | 1.54 | 1.54 | 1.54                  | 1.55 | 1.53 | 0.00            | 0.06  | -0.06 | ±0.3           |
| 4000     | 1.53                  | 1.53 | 1.53 | 1.52                  | 1.53 | 1.53 | -0.06           | 0.00  | 0.00  | ±0.3           |
| 5200     | 1.52                  | 1.52 | 1.52 | 1.51                  | 1.52 | 1.51 | -0.06           | 0.00  | -0.06 | ±0.3           |
| 6600     | 1.51                  | 1.51 | 1.51 | 1.51                  | 1.52 | 1.51 | 0.00            | 0.06  | 0.00  | ±0.3           |
| 8200     | 1.50                  | 1.50 | 1.50 | 1.50                  | 1.50 | 1.50 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 9000     | 1.50                  | 1.50 | 1.50 | 1.50                  | 1.50 | 1.50 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 10600    | 4.21                  | 4.17 | 4.16 | 4.21                  | 4.17 | 4.16 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 13400    | 4.21                  | 4.18 | 4.18 | 4.23                  | 4.18 | 4.20 | 0.04            | 0.00  | 0.04  | ±0.3           |
| 17000    | 4.21                  | 4.18 | 4.18 | 4.20                  | 4.18 | 4.17 | -0.02           | 0.00  | -0.02 | ±0.3           |
| 21400    | 4.24                  | 4.21 | 4.20 | 4.25                  | 4.21 | 4.20 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 27200    | 4.23                  | 4.20 | 4.19 | 4.23                  | 4.21 | 4.20 | 0.00            | 0.02  | 0.02  | ±0.3           |
| 34400    | 4.24                  | 4.21 | 4.21 | 4.23                  | 4.22 | 4.21 | -0.02           | 0.02  | 0.00  | ±0.3           |
| 40000    | 4.23                  | 4.21 | 4.21 | 4.24                  | 4.21 | 4.20 | 0.02            | 0.00  | -0.02 | ±0.3           |
| 43600    | 4.23                  | 4.21 | 4.20 | 4.23                  | 4.20 | 4.21 | 0.00            | -0.02 | 0.02  | ±0.3           |
| 55400    | 4.22                  | 4.20 | 4.19 | 4.22                  | 4.21 | 4.19 | 0.00            | 0.02  | 0.00  | ±0.3           |
| 70000    | 4.21                  | 4.19 | 4.19 | 4.21                  | 4.20 | 4.18 | 0.00            | 0.02  | -0.02 | ±0.3           |
| 88800    | 4.20                  | 4.18 | 4.18 | 4.20                  | 4.18 | 4.17 | 0.00            | 0.00  | -0.02 | ±0.3           |
| 112400   | 4.19                  | 4.17 | 4.17 | 4.19                  | 4.18 | 4.17 | 0.00            | 0.02  | 0.00  | ±0.3           |
| 142400   | 4.17                  | 4.16 | 4.15 | 4.17                  | 4.16 | 4.15 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 161750   | 4.16                  | 4.14 | 4.14 | 4.16                  | 4.14 | 4.14 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 180400   | 4.14                  | 4.13 | 4.13 | 4.14                  | 4.13 | 4.13 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 228400   | 4.12                  | 4.10 | 4.10 | 4.12                  | 4.10 | 4.10 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 289400   | 4.08                  | 4.07 | 4.07 | 4.08                  | 4.07 | 4.07 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 366400   | 4.04                  | 4.03 | 4.03 | 4.05                  | 4.03 | 4.03 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 400000   | 4.02                  | 4.02 | 4.01 | 4.03                  | 4.01 | 4.01 | 0.02            | -0.02 | 0.00  | ±0.3           |
| 464000   | 4.00                  | 3.99 | 3.99 | 4.01                  | 3.99 | 3.99 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 567600   | 3.95                  | 3.94 | 3.94 | 3.95                  | 3.94 | 3.94 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 744200   | 3.91                  | 3.90 | 3.90 | 3.91                  | 3.90 | 3.90 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 942600   | 3.89                  | 3.89 | 3.88 | 3.90                  | 3.89 | 3.88 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 1193600  | 3.87                  | 3.86 | 3.86 | 3.87                  | 3.86 | 3.86 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 1511600  | 3.85                  | 3.85 | 3.85 | 3.86                  | 3.85 | 3.85 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 1914400  | 3.84                  | 3.84 | 3.83 | 3.84                  | 3.84 | 3.83 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 2424400  | 3.82                  | 3.82 | 3.81 | 3.82                  | 3.82 | 3.81 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 3070200  | 3.79                  | 3.79 | 3.77 | 3.79                  | 3.79 | 3.78 | 0.00            | 0.00  | 0.02  | ±0.3           |
| 3888000  | 3.74                  | 3.73 | 3.72 | 3.74                  | 3.74 | 3.72 | 0.00            | 0.02  | 0.00  | ±0.3           |
| 4000000  | 3.73                  | 3.72 | 3.71 | 3.73                  | 3.73 | 3.71 | 0.00            | 0.02  | 0.00  | ±0.3           |
| 4923800  | 3.66                  | 3.65 | 3.64 | 3.66                  | 3.65 | 3.64 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 6235400  | 3.54                  | 3.54 | 3.53 | 3.54                  | 3.54 | 3.53 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 7896400  | 3.41                  | 3.40 | 3.39 | 3.42                  | 3.41 | 3.40 | 0.03            | 0.03  | 0.03  | ±0.3           |
| 10000000 | 3.25                  | 3.24 | 3.23 | 3.26                  | 3.24 | 3.25 | 0.03            | 0.00  | 0.05  | ±0.3           |

SPEAG H-field frequency response tolerance criteria<sup>1</sup>:  
±0.3dB for applied H-fields at calibration points from 3kHz to 10MHz

<sup>1</sup> Calibration uncertainty not taken into account (shared risk 50%).

|                                 |                                                                                                                              |                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|
| FCC ID: A3LSMS948B              |  <b>WPT RF EXPOSURE EVALUATION REPORT</b> | <b>Reviewed by:</b><br>Technical Manager |
| <b>Test Dates:</b><br>10/2/2025 | <b>Apparatus/Device:</b><br>Portable Handset                                                                                 | <b>APPENDIX C:</b><br>Page 15 of 26      |

Frequency Response, H-field, Channel 4

| f/(Hz)   | H-field/(A/m) Applied |      |      | H-field/(A/m) Reading |      |      | Difference/(dB) |       |       | Tolerance/(dB) |
|----------|-----------------------|------|------|-----------------------|------|------|-----------------|-------|-------|----------------|
|          | x                     | y    | z    | x                     | y    | z    | x               | y     | z     |                |
| 3000     | 1.54                  | 1.54 | 1.54 | 1.54                  | 1.55 | 1.54 | 0.00            | 0.06  | 0.00  | ±0.3           |
| 3200     | 1.54                  | 1.54 | 1.54 | 1.54                  | 1.55 | 1.49 | 0.00            | 0.06  | -0.29 | ±0.3           |
| 4000     | 1.53                  | 1.53 | 1.53 | 1.53                  | 1.54 | 1.54 | 0.00            | 0.06  | 0.06  | ±0.3           |
| 5200     | 1.52                  | 1.52 | 1.52 | 1.52                  | 1.53 | 1.56 | 0.00            | 0.08  | 0.23  | ±0.3           |
| 6600     | 1.51                  | 1.51 | 1.51 | 1.51                  | 1.52 | 1.51 | 0.00            | 0.06  | 0.00  | ±0.3           |
| 8200     | 1.50                  | 1.50 | 1.50 | 1.50                  | 1.50 | 1.50 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 9000     | 1.50                  | 1.50 | 1.50 | 1.49                  | 1.50 | 1.50 | -0.06           | 0.00  | 0.00  | ±0.3           |
| 10600    | 4.21                  | 4.17 | 4.16 | 4.25                  | 4.14 | 4.14 | 0.08            | -0.06 | -0.04 | ±0.3           |
| 13400    | 4.21                  | 4.18 | 4.18 | 4.24                  | 4.20 | 4.17 | 0.06            | 0.04  | -0.02 | ±0.3           |
| 17000    | 4.21                  | 4.18 | 4.18 | 4.23                  | 4.18 | 4.19 | 0.04            | 0.00  | 0.02  | ±0.3           |
| 21400    | 4.24                  | 4.21 | 4.20 | 4.22                  | 4.20 | 4.19 | -0.04           | -0.02 | -0.02 | ±0.3           |
| 27200    | 4.23                  | 4.20 | 4.19 | 4.23                  | 4.21 | 4.18 | 0.00            | 0.02  | -0.02 | ±0.3           |
| 34400    | 4.24                  | 4.21 | 4.21 | 4.24                  | 4.22 | 4.21 | 0.00            | 0.02  | 0.00  | ±0.3           |
| 40000    | 4.23                  | 4.21 | 4.21 | 4.24                  | 4.21 | 4.21 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 43600    | 4.23                  | 4.21 | 4.20 | 4.23                  | 4.21 | 4.20 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 55400    | 4.22                  | 4.20 | 4.19 | 4.22                  | 4.20 | 4.19 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 70000    | 4.21                  | 4.19 | 4.19 | 4.22                  | 4.20 | 4.18 | 0.02            | 0.02  | -0.02 | ±0.3           |
| 88900    | 4.20                  | 4.18 | 4.18 | 4.21                  | 4.18 | 4.17 | 0.02            | 0.00  | -0.02 | ±0.3           |
| 112400   | 4.19                  | 4.17 | 4.17 | 4.20                  | 4.17 | 4.17 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 142400   | 4.17                  | 4.16 | 4.15 | 4.18                  | 4.16 | 4.15 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 161750   | 4.16                  | 4.14 | 4.14 | 4.16                  | 4.14 | 4.14 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 180400   | 4.14                  | 4.13 | 4.13 | 4.15                  | 4.13 | 4.13 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 228400   | 4.12                  | 4.10 | 4.10 | 4.12                  | 4.10 | 4.10 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 289400   | 4.08                  | 4.07 | 4.07 | 4.09                  | 4.07 | 4.07 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 366400   | 4.04                  | 4.03 | 4.03 | 4.05                  | 4.03 | 4.03 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 400000   | 4.02                  | 4.02 | 4.01 | 4.03                  | 4.01 | 4.01 | 0.02            | -0.02 | 0.00  | ±0.3           |
| 464000   | 4.00                  | 3.99 | 3.99 | 4.01                  | 4.00 | 3.99 | 0.02            | 0.02  | 0.00  | ±0.3           |
| 587800   | 3.95                  | 3.94 | 3.94 | 3.96                  | 3.94 | 3.94 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 744200   | 3.91                  | 3.90 | 3.90 | 3.91                  | 3.90 | 3.90 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 942600   | 3.89                  | 3.89 | 3.88 | 3.90                  | 3.89 | 3.88 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 1193600  | 3.87                  | 3.86 | 3.86 | 3.87                  | 3.87 | 3.86 | 0.00            | 0.02  | 0.00  | ±0.3           |
| 1511600  | 3.85                  | 3.85 | 3.85 | 3.86                  | 3.85 | 3.85 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 1914400  | 3.84                  | 3.84 | 3.83 | 3.85                  | 3.84 | 3.83 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 2424400  | 3.82                  | 3.82 | 3.81 | 3.82                  | 3.82 | 3.81 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 3070200  | 3.79                  | 3.79 | 3.77 | 3.79                  | 3.79 | 3.78 | 0.00            | 0.00  | 0.02  | ±0.3           |
| 3888000  | 3.74                  | 3.73 | 3.72 | 3.74                  | 3.74 | 3.72 | 0.00            | 0.02  | 0.00  | ±0.3           |
| 4000000  | 3.73                  | 3.72 | 3.71 | 3.73                  | 3.72 | 3.71 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 4923800  | 3.66                  | 3.65 | 3.64 | 3.65                  | 3.66 | 3.64 | -0.02           | 0.02  | 0.00  | ±0.3           |
| 6235400  | 3.54                  | 3.54 | 3.53 | 3.54                  | 3.54 | 3.53 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 7896400  | 3.41                  | 3.40 | 3.39 | 3.41                  | 3.41 | 3.39 | 0.00            | 0.03  | 0.00  | ±0.3           |
| 10000000 | 3.25                  | 3.24 | 3.23 | 3.23                  | 3.23 | 3.24 | -0.05           | -0.03 | 0.03  | ±0.3           |

SPEAG H-field frequency response tolerance criteria<sup>1</sup>:  
±0.3dB for applied H-fields at calibration points from 3kHz to 10MHz

<sup>1</sup> Calibration uncertainty not taken into account (shared risk 50%).

|                                 |                                                                                                                              |                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|
| FCC ID: A3LSMS948B              |  <b>WPT RF EXPOSURE EVALUATION REPORT</b> | <b>Reviewed by:</b><br>Technical Manager |
| <b>Test Dates:</b><br>10/2/2025 | <b>Apparatus/Device:</b><br>Portable Handset                                                                                 | <b>APPENDIX C:</b><br>Page 16 of 26      |

Frequency Response, H-field, Channel 5

| f/(Hz)   | H-field/(A/m) Applied |      |      | H-field/(A/m) Reading |      |      | Difference/(dB) |       |       | Tolerance/(dB) |
|----------|-----------------------|------|------|-----------------------|------|------|-----------------|-------|-------|----------------|
|          | x                     | y    | z    | x                     | y    | z    | x               | y     | z     |                |
| 3000     | 1.54                  | 1.54 | 1.54 | 1.54                  | 1.54 | 1.55 | 0.00            | 0.00  | 0.06  | ±0.3           |
| 3200     | 1.54                  | 1.54 | 1.54 | 1.54                  | 1.54 | 1.53 | 0.00            | 0.00  | -0.06 | ±0.3           |
| 4000     | 1.53                  | 1.53 | 1.53 | 1.53                  | 1.53 | 1.53 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 5200     | 1.52                  | 1.52 | 1.52 | 1.52                  | 1.52 | 1.51 | 0.00            | 0.00  | -0.06 | ±0.3           |
| 6600     | 1.51                  | 1.51 | 1.51 | 1.52                  | 1.52 | 1.51 | 0.06            | 0.06  | 0.00  | ±0.3           |
| 8200     | 1.50                  | 1.50 | 1.50 | 1.51                  | 1.50 | 1.50 | 0.06            | 0.00  | 0.00  | ±0.3           |
| 9000     | 1.50                  | 1.50 | 1.50 | 1.50                  | 1.50 | 1.50 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 10600    | 4.21                  | 4.17 | 4.16 | 4.25                  | 4.13 | 4.15 | 0.08            | -0.08 | -0.02 | ±0.3           |
| 13400    | 4.21                  | 4.18 | 4.18 | 4.21                  | 4.19 | 4.18 | 0.00            | 0.02  | 0.00  | ±0.3           |
| 17000    | 4.21                  | 4.18 | 4.18 | 4.22                  | 4.18 | 4.19 | 0.02            | 0.00  | 0.02  | ±0.3           |
| 21400    | 4.24                  | 4.21 | 4.20 | 4.24                  | 4.21 | 4.21 | 0.00            | 0.00  | 0.02  | ±0.3           |
| 27200    | 4.23                  | 4.20 | 4.19 | 4.23                  | 4.20 | 4.18 | 0.00            | 0.00  | -0.02 | ±0.3           |
| 34400    | 4.24                  | 4.21 | 4.21 | 4.24                  | 4.21 | 4.21 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 40000    | 4.23                  | 4.21 | 4.21 | 4.23                  | 4.21 | 4.21 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 43600    | 4.23                  | 4.21 | 4.20 | 4.23                  | 4.21 | 4.21 | 0.00            | 0.00  | 0.02  | ±0.3           |
| 55400    | 4.22                  | 4.20 | 4.19 | 4.22                  | 4.20 | 4.19 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 70000    | 4.21                  | 4.19 | 4.19 | 4.21                  | 4.19 | 4.19 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 88800    | 4.20                  | 4.18 | 4.18 | 4.20                  | 4.18 | 4.18 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 112400   | 4.19                  | 4.17 | 4.17 | 4.19                  | 4.17 | 4.16 | 0.00            | 0.00  | -0.02 | ±0.3           |
| 142400   | 4.17                  | 4.16 | 4.15 | 4.17                  | 4.16 | 4.15 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 161750   | 4.16                  | 4.14 | 4.14 | 4.16                  | 4.14 | 4.14 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 180400   | 4.14                  | 4.13 | 4.13 | 4.15                  | 4.13 | 4.13 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 228400   | 4.12                  | 4.10 | 4.10 | 4.12                  | 4.09 | 4.10 | 0.00            | -0.02 | 0.00  | ±0.3           |
| 289400   | 4.08                  | 4.07 | 4.07 | 4.08                  | 4.07 | 4.07 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 366400   | 4.04                  | 4.03 | 4.03 | 4.04                  | 4.04 | 4.03 | 0.00            | 0.02  | 0.00  | ±0.3           |
| 400000   | 4.02                  | 4.02 | 4.01 | 4.03                  | 4.02 | 4.01 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 464000   | 4.00                  | 3.99 | 3.99 | 4.01                  | 4.00 | 3.99 | 0.02            | 0.02  | 0.00  | ±0.3           |
| 587800   | 3.95                  | 3.94 | 3.94 | 3.95                  | 3.94 | 3.94 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 744200   | 3.91                  | 3.90 | 3.90 | 3.91                  | 3.90 | 3.89 | 0.00            | 0.00  | -0.02 | ±0.3           |
| 942600   | 3.89                  | 3.89 | 3.88 | 3.90                  | 3.89 | 3.88 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 1193600  | 3.87                  | 3.86 | 3.86 | 3.87                  | 3.86 | 3.86 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 1511600  | 3.85                  | 3.85 | 3.85 | 3.86                  | 3.84 | 3.85 | 0.02            | -0.02 | 0.00  | ±0.3           |
| 1914400  | 3.84                  | 3.84 | 3.83 | 3.85                  | 3.84 | 3.83 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 2424400  | 3.82                  | 3.82 | 3.81 | 3.83                  | 3.82 | 3.81 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 3070200  | 3.79                  | 3.79 | 3.77 | 3.79                  | 3.79 | 3.78 | 0.00            | 0.00  | 0.02  | ±0.3           |
| 3888000  | 3.74                  | 3.73 | 3.72 | 3.73                  | 3.74 | 3.72 | -0.02           | 0.02  | 0.00  | ±0.3           |
| 4000000  | 3.73                  | 3.72 | 3.71 | 3.73                  | 3.73 | 3.71 | 0.00            | 0.02  | 0.00  | ±0.3           |
| 4923800  | 3.66                  | 3.65 | 3.64 | 3.66                  | 3.65 | 3.64 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 6235400  | 3.54                  | 3.54 | 3.53 | 3.54                  | 3.54 | 3.53 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 7896400  | 3.41                  | 3.40 | 3.39 | 3.41                  | 3.41 | 3.39 | 0.00            | 0.03  | 0.00  | ±0.3           |
| 10000000 | 3.25                  | 3.24 | 3.23 | 3.25                  | 3.25 | 3.24 | 0.00            | 0.03  | 0.03  | ±0.3           |

SPEAG H-field frequency response tolerance criteria<sup>1</sup>:  
±0.3dB for applied H-fields at calibration points from 3kHz to 10MHz

<sup>1</sup> Calibration uncertainty not taken into account (shared risk 50%).

|                                 |                                                                                                                              |                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|
| FCC ID: A3LSMS948B              |  <b>WPT RF EXPOSURE EVALUATION REPORT</b> | <b>Reviewed by:</b><br>Technical Manager |
| <b>Test Dates:</b><br>10/2/2025 | <b>Apparatus/Device:</b><br>Portable Handset                                                                                 | <b>APPENDIX C:</b><br>Page 17 of 26      |

Frequency Response, H-field, Channel 6

| f/(Hz)   | H-field/(A/m) Applied |      |      | H-field/(A/m) Reading |      |      | Difference/(dB) |       |       | Tolerance/(dB) |
|----------|-----------------------|------|------|-----------------------|------|------|-----------------|-------|-------|----------------|
|          | x                     | y    | z    | x                     | y    | z    | x               | y     | z     |                |
| 3000     | 1.54                  | 1.54 | 1.54 | 1.55                  | 1.54 | 1.53 | 0.06            | 0.00  | -0.06 | ±0.3           |
| 3200     | 1.54                  | 1.54 | 1.54 | 1.53                  | 1.54 | 1.52 | -0.06           | 0.00  | -0.11 | ±0.3           |
| 4000     | 1.53                  | 1.53 | 1.53 | 1.53                  | 1.53 | 1.53 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 5200     | 1.52                  | 1.52 | 1.52 | 1.52                  | 1.52 | 1.53 | 0.00            | 0.00  | 0.06  | ±0.3           |
| 6600     | 1.51                  | 1.51 | 1.51 | 1.52                  | 1.52 | 1.52 | 0.06            | 0.06  | 0.06  | ±0.3           |
| 8200     | 1.50                  | 1.50 | 1.50 | 1.51                  | 1.50 | 1.49 | 0.06            | 0.00  | -0.06 | ±0.3           |
| 9000     | 1.50                  | 1.50 | 1.50 | 1.50                  | 1.50 | 1.50 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 10600    | 4.21                  | 4.17 | 4.16 | 4.20                  | 4.15 | 4.15 | -0.02           | -0.04 | -0.02 | ±0.3           |
| 13400    | 4.21                  | 4.18 | 4.18 | 4.22                  | 4.19 | 4.17 | 0.02            | 0.02  | -0.02 | ±0.3           |
| 17000    | 4.21                  | 4.18 | 4.18 | 4.22                  | 4.18 | 4.17 | 0.02            | 0.00  | -0.02 | ±0.3           |
| 21400    | 4.24                  | 4.21 | 4.20 | 4.26                  | 4.22 | 4.20 | 0.04            | 0.02  | 0.00  | ±0.3           |
| 27200    | 4.23                  | 4.20 | 4.19 | 4.24                  | 4.20 | 4.19 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 34400    | 4.24                  | 4.21 | 4.21 | 4.24                  | 4.22 | 4.21 | 0.00            | 0.02  | 0.00  | ±0.3           |
| 40000    | 4.23                  | 4.21 | 4.21 | 4.25                  | 4.21 | 4.20 | 0.04            | 0.00  | -0.02 | ±0.3           |
| 43600    | 4.23                  | 4.21 | 4.20 | 4.24                  | 4.20 | 4.21 | 0.02            | -0.02 | 0.02  | ±0.3           |
| 55400    | 4.22                  | 4.20 | 4.19 | 4.22                  | 4.20 | 4.20 | 0.00            | 0.00  | 0.02  | ±0.3           |
| 70000    | 4.21                  | 4.19 | 4.19 | 4.21                  | 4.19 | 4.19 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 88800    | 4.20                  | 4.18 | 4.18 | 4.20                  | 4.19 | 4.17 | 0.00            | 0.02  | -0.02 | ±0.3           |
| 112400   | 4.19                  | 4.17 | 4.17 | 4.19                  | 4.17 | 4.17 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 142400   | 4.17                  | 4.16 | 4.15 | 4.18                  | 4.15 | 4.15 | 0.02            | -0.02 | 0.00  | ±0.3           |
| 161750   | 4.16                  | 4.14 | 4.14 | 4.16                  | 4.14 | 4.13 | 0.00            | 0.00  | -0.02 | ±0.3           |
| 180400   | 4.14                  | 4.13 | 4.13 | 4.14                  | 4.13 | 4.13 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 228400   | 4.12                  | 4.10 | 4.10 | 4.12                  | 4.10 | 4.09 | 0.00            | 0.00  | -0.02 | ±0.3           |
| 289400   | 4.08                  | 4.07 | 4.07 | 4.09                  | 4.07 | 4.06 | 0.02            | 0.00  | -0.02 | ±0.3           |
| 366400   | 4.04                  | 4.03 | 4.03 | 4.05                  | 4.03 | 4.03 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 400000   | 4.02                  | 4.02 | 4.01 | 4.03                  | 4.01 | 4.01 | 0.02            | -0.02 | 0.00  | ±0.3           |
| 464000   | 4.00                  | 3.99 | 3.99 | 4.01                  | 4.00 | 3.99 | 0.02            | 0.02  | 0.00  | ±0.3           |
| 587800   | 3.95                  | 3.94 | 3.94 | 3.95                  | 3.94 | 3.94 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 744200   | 3.91                  | 3.90 | 3.90 | 3.91                  | 3.90 | 3.90 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 942600   | 3.89                  | 3.89 | 3.88 | 3.90                  | 3.89 | 3.88 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 1193600  | 3.87                  | 3.86 | 3.86 | 3.86                  | 3.86 | 3.86 | -0.02           | 0.00  | 0.00  | ±0.3           |
| 1511600  | 3.85                  | 3.85 | 3.85 | 3.86                  | 3.85 | 3.85 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 1914400  | 3.84                  | 3.84 | 3.83 | 3.84                  | 3.84 | 3.83 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 2424400  | 3.82                  | 3.82 | 3.81 | 3.82                  | 3.82 | 3.81 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 3070200  | 3.79                  | 3.79 | 3.77 | 3.79                  | 3.79 | 3.78 | 0.00            | 0.00  | 0.02  | ±0.3           |
| 3888000  | 3.74                  | 3.73 | 3.72 | 3.73                  | 3.73 | 3.72 | -0.02           | 0.00  | 0.00  | ±0.3           |
| 4000000  | 3.73                  | 3.72 | 3.71 | 3.73                  | 3.73 | 3.71 | 0.00            | 0.02  | 0.00  | ±0.3           |
| 4923800  | 3.66                  | 3.65 | 3.64 | 3.65                  | 3.65 | 3.64 | -0.02           | 0.00  | 0.00  | ±0.3           |
| 6235400  | 3.54                  | 3.54 | 3.53 | 3.55                  | 3.54 | 3.53 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 7896400  | 3.41                  | 3.40 | 3.39 | 3.41                  | 3.41 | 3.39 | 0.00            | 0.03  | 0.00  | ±0.3           |
| 10000000 | 3.25                  | 3.24 | 3.23 | 3.25                  | 3.25 | 3.23 | 0.00            | 0.03  | 0.00  | ±0.3           |

SPEAG H-field frequency response tolerance criteria<sup>1</sup>:  
±0.3dB for applied H-fields at calibration points from 3kHz to 10MHz

<sup>1</sup> Calibration uncertainty not taken into account (shared risk 50%).

|                                 |                                                                                                                              |                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|
| FCC ID: A3LSMS948B              |  <b>WPT RF EXPOSURE EVALUATION REPORT</b> | <b>Reviewed by:</b><br>Technical Manager |
| <b>Test Dates:</b><br>10/2/2025 | <b>Apparatus/Device:</b><br>Portable Handset                                                                                 | APPENDIX C:<br>Page 18 of 26             |

Frequency Response, H-field, Channel 7

| f/(Hz)   | H-field/(A/m) Applied |      |      | H-field/(A/m) Reading |      |      | Difference/(dB) |       |       | Tolerance/(dB) |
|----------|-----------------------|------|------|-----------------------|------|------|-----------------|-------|-------|----------------|
|          | x                     | y    | z    | x                     | y    | z    | x               | y     | z     |                |
| 3000     | 1.54                  | 1.54 | 1.54 | 1.55                  | 1.53 | 1.55 | 0.06            | -0.06 | 0.06  | ±0.3           |
| 3200     | 1.54                  | 1.54 | 1.54 | 1.54                  | 1.55 | 1.53 | 0.00            | 0.06  | -0.06 | ±0.3           |
| 4000     | 1.53                  | 1.53 | 1.53 | 1.53                  | 1.53 | 1.53 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 5200     | 1.52                  | 1.52 | 1.52 | 1.51                  | 1.52 | 1.52 | -0.06           | 0.00  | 0.00  | ±0.3           |
| 6600     | 1.51                  | 1.51 | 1.51 | 1.51                  | 1.52 | 1.51 | 0.00            | 0.06  | 0.00  | ±0.3           |
| 8200     | 1.50                  | 1.50 | 1.50 | 1.51                  | 1.50 | 1.50 | 0.06            | 0.00  | 0.00  | ±0.3           |
| 9000     | 1.50                  | 1.50 | 1.50 | 1.50                  | 1.50 | 1.50 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 10600    | 4.21                  | 4.17 | 4.16 | 4.21                  | 4.13 | 4.17 | 0.00            | -0.08 | 0.02  | ±0.3           |
| 13400    | 4.21                  | 4.18 | 4.18 | 4.20                  | 4.19 | 4.20 | -0.02           | 0.02  | 0.04  | ±0.3           |
| 17000    | 4.21                  | 4.18 | 4.18 | 4.21                  | 4.18 | 4.18 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 21400    | 4.24                  | 4.21 | 4.20 | 4.23                  | 4.19 | 4.21 | -0.02           | -0.04 | 0.02  | ±0.3           |
| 27200    | 4.23                  | 4.20 | 4.19 | 4.23                  | 4.19 | 4.20 | 0.00            | -0.02 | 0.02  | ±0.3           |
| 34400    | 4.24                  | 4.21 | 4.21 | 4.24                  | 4.21 | 4.21 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 40000    | 4.23                  | 4.21 | 4.21 | 4.24                  | 4.21 | 4.20 | 0.02            | 0.00  | -0.02 | ±0.3           |
| 43600    | 4.23                  | 4.21 | 4.20 | 4.23                  | 4.21 | 4.22 | 0.00            | 0.00  | 0.04  | ±0.3           |
| 55400    | 4.22                  | 4.20 | 4.19 | 4.22                  | 4.20 | 4.20 | 0.00            | 0.00  | 0.02  | ±0.3           |
| 70000    | 4.21                  | 4.19 | 4.19 | 4.21                  | 4.19 | 4.19 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 88800    | 4.20                  | 4.18 | 4.18 | 4.20                  | 4.18 | 4.17 | 0.00            | 0.00  | -0.02 | ±0.3           |
| 112400   | 4.19                  | 4.17 | 4.17 | 4.20                  | 4.17 | 4.17 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 142400   | 4.17                  | 4.16 | 4.15 | 4.18                  | 4.16 | 4.15 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 161750   | 4.16                  | 4.14 | 4.14 | 4.15                  | 4.14 | 4.14 | -0.02           | 0.00  | 0.00  | ±0.3           |
| 180400   | 4.14                  | 4.13 | 4.13 | 4.15                  | 4.13 | 4.12 | 0.02            | 0.00  | -0.02 | ±0.3           |
| 228400   | 4.12                  | 4.10 | 4.10 | 4.12                  | 4.10 | 4.10 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 289400   | 4.08                  | 4.07 | 4.07 | 4.08                  | 4.07 | 4.07 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 366400   | 4.04                  | 4.03 | 4.03 | 4.05                  | 4.03 | 4.03 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 400000   | 4.02                  | 4.02 | 4.01 | 4.03                  | 4.01 | 4.01 | 0.02            | -0.02 | 0.00  | ±0.3           |
| 464000   | 4.00                  | 3.99 | 3.99 | 4.01                  | 4.00 | 4.00 | 0.02            | 0.02  | 0.02  | ±0.3           |
| 587800   | 3.95                  | 3.94 | 3.94 | 3.95                  | 3.94 | 3.93 | 0.00            | 0.00  | -0.02 | ±0.3           |
| 744200   | 3.91                  | 3.90 | 3.90 | 3.91                  | 3.90 | 3.90 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 942600   | 3.89                  | 3.89 | 3.88 | 3.89                  | 3.89 | 3.88 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 1193600  | 3.87                  | 3.86 | 3.86 | 3.86                  | 3.86 | 3.86 | -0.02           | 0.00  | 0.00  | ±0.3           |
| 1511600  | 3.85                  | 3.85 | 3.85 | 3.86                  | 3.85 | 3.85 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 1914400  | 3.84                  | 3.84 | 3.83 | 3.85                  | 3.84 | 3.83 | 0.02            | 0.00  | 0.00  | ±0.3           |
| 2424400  | 3.82                  | 3.82 | 3.81 | 3.82                  | 3.82 | 3.81 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 3070200  | 3.79                  | 3.79 | 3.77 | 3.79                  | 3.79 | 3.78 | 0.00            | 0.00  | 0.02  | ±0.3           |
| 3888000  | 3.74                  | 3.73 | 3.72 | 3.73                  | 3.73 | 3.72 | -0.02           | 0.00  | 0.00  | ±0.3           |
| 4000000  | 3.73                  | 3.72 | 3.71 | 3.73                  | 3.73 | 3.71 | 0.00            | 0.02  | 0.00  | ±0.3           |
| 4923800  | 3.66                  | 3.65 | 3.64 | 3.65                  | 3.65 | 3.65 | -0.02           | 0.00  | 0.02  | ±0.3           |
| 6235400  | 3.54                  | 3.54 | 3.53 | 3.54                  | 3.54 | 3.53 | 0.00            | 0.00  | 0.00  | ±0.3           |
| 7896400  | 3.41                  | 3.40 | 3.39 | 3.41                  | 3.41 | 3.39 | 0.00            | 0.03  | 0.00  | ±0.3           |
| 10000000 | 3.25                  | 3.24 | 3.23 | 3.21                  | 3.24 | 3.25 | -0.11           | 0.00  | 0.05  | ±0.3           |

SPEAG H-field frequency response tolerance criteria<sup>1</sup>:  
±0.3dB for applied H-fields at calibration points from 3kHz to 10MHz

<sup>1</sup> Calibration uncertainty not taken into account (shared risk 50%).

|                          |                                                                                     |                                   |                                   |
|--------------------------|-------------------------------------------------------------------------------------|-----------------------------------|-----------------------------------|
| FCC ID: A3LSMS948B       |  | WPT RF EXPOSURE EVALUATION REPORT | Reviewed by:<br>Technical Manager |
| Test Dates:<br>10/2/2025 | Apparatus/Device:<br>Portable Handset                                               |                                   | APPENDIX C:<br>Page 19 of 26      |

Frequency Response, E-field, Channel 0

| f(Hz)    | E-field(V/m) Applied |      |      | E-field(V/m) Reading |      |      | Difference(dB) |       |       | Tolerance(dB) |
|----------|----------------------|------|------|----------------------|------|------|----------------|-------|-------|---------------|
|          | x                    | y    | z    | x                    | y    | z    | x              | y     | z     |               |
| 3000     | 84.6                 | 84.6 | 88.0 | 84.6                 | 84.7 | 88.0 | 0.00           | 0.01  | 0.00  | ±0.3          |
| 3200     | 86.2                 | 86.2 | 80.3 | 85.6                 | 87.3 | 79.5 | -0.06          | 0.11  | -0.09 | ±0.3          |
| 4000     | 83.9                 | 83.9 | 88.0 | 83.9                 | 84.0 | 88.0 | 0.00           | 0.01  | 0.00  | ±0.3          |
| 5200     | 81.8                 | 81.8 | 85.0 | 82.2                 | 82.1 | 85.8 | 0.04           | 0.03  | 0.08  | ±0.3          |
| 6600     | 81.9                 | 81.9 | 82.1 | 81.9                 | 81.7 | 82.5 | 0.00           | -0.02 | 0.04  | ±0.3          |
| 8200     | 78.0                 | 78.0 | 82.1 | 77.9                 | 78.2 | 82.1 | -0.01          | 0.02  | 0.00  | ±0.3          |
| 9000     | 83.4                 | 83.4 | 83.5 | 83.4                 | 83.5 | 83.5 | 0.00           | 0.01  | 0.00  | ±0.3          |
| 10600    | 82.6                 | 82.6 | 81.7 | 82.8                 | 82.6 | 81.8 | 0.02           | 0.00  | 0.01  | ±0.3          |
| 13400    | 85.7                 | 85.7 | 79.6 | 85.6                 | 85.8 | 79.6 | -0.01          | 0.01  | 0.00  | ±0.3          |
| 17000    | 84.9                 | 84.9 | 78.2 | 84.9                 | 84.9 | 78.3 | 0.00           | 0.00  | 0.01  | ±0.3          |
| 21400    | 83.1                 | 83.1 | 82.6 | 83.1                 | 83.2 | 82.6 | 0.00           | 0.01  | 0.00  | ±0.3          |
| 27200    | 83.9                 | 83.9 | 80.4 | 83.8                 | 84.0 | 80.5 | -0.01          | 0.01  | 0.01  | ±0.3          |
| 34400    | 82.5                 | 82.5 | 79.4 | 82.6                 | 82.6 | 79.4 | 0.01           | 0.01  | 0.00  | ±0.3          |
| 40000    | 83.2                 | 83.2 | 82.1 | 83.2                 | 83.2 | 82.2 | 0.00           | 0.00  | 0.01  | ±0.3          |
| 43600    | 82.5                 | 82.5 | 81.3 | 82.4                 | 82.6 | 81.3 | -0.01          | 0.01  | 0.00  | ±0.3          |
| 55400    | 82.3                 | 82.3 | 81.3 | 82.3                 | 82.4 | 81.3 | 0.00           | 0.01  | 0.00  | ±0.3          |
| 70000    | 83.1                 | 83.1 | 81.4 | 83.1                 | 83.2 | 81.4 | 0.00           | 0.01  | 0.00  | ±0.3          |
| 88800    | 82.2                 | 82.2 | 82.1 | 82.2                 | 82.3 | 82.2 | 0.00           | 0.01  | 0.01  | ±0.3          |
| 112400   | 82.6                 | 82.6 | 81.7 | 82.6                 | 82.7 | 81.7 | 0.00           | 0.01  | 0.00  | ±0.3          |
| 142400   | 82.6                 | 82.6 | 82.1 | 82.6                 | 82.7 | 82.1 | 0.00           | 0.01  | 0.00  | ±0.3          |
| 161750   | 82.7                 | 82.7 | 82.1 | 82.7                 | 82.7 | 82.1 | 0.00           | 0.00  | 0.00  | ±0.3          |
| 180400   | 83.0                 | 83.0 | 82.1 | 83.0                 | 83.1 | 82.1 | 0.00           | 0.01  | 0.00  | ±0.3          |
| 228400   | 83.1                 | 83.1 | 82.2 | 83.1                 | 83.2 | 82.2 | 0.00           | 0.01  | 0.00  | ±0.3          |
| 289400   | 83.3                 | 83.3 | 82.6 | 83.3                 | 83.4 | 82.7 | 0.00           | 0.01  | 0.01  | ±0.3          |
| 366400   | 83.5                 | 83.5 | 82.7 | 83.5                 | 83.5 | 82.8 | 0.00           | 0.00  | 0.01  | ±0.3          |
| 400000   | 83.8                 | 83.8 | 82.7 | 83.8                 | 83.9 | 82.8 | 0.00           | 0.01  | 0.01  | ±0.3          |
| 464000   | 84.0                 | 84.0 | 83.0 | 84.0                 | 84.1 | 83.0 | 0.00           | 0.01  | 0.00  | ±0.3          |
| 587800   | 84.0                 | 84.0 | 83.0 | 84.0                 | 84.1 | 83.1 | 0.00           | 0.01  | 0.01  | ±0.3          |
| 744200   | 84.1                 | 84.1 | 83.0 | 84.1                 | 84.2 | 83.0 | 0.00           | 0.01  | 0.00  | ±0.3          |
| 942600   | 84.1                 | 84.1 | 83.1 | 84.1                 | 84.2 | 83.2 | 0.00           | 0.01  | 0.01  | ±0.3          |
| 1193600  | 83.8                 | 83.8 | 82.7 | 83.9                 | 83.9 | 82.8 | 0.01           | 0.01  | 0.01  | ±0.3          |
| 1511600  | 83.3                 | 83.3 | 82.3 | 83.4                 | 83.4 | 82.4 | 0.01           | 0.01  | 0.01  | ±0.3          |
| 1914400  | 82.9                 | 82.9 | 82.0 | 83.0                 | 83.0 | 82.1 | 0.01           | 0.01  | 0.01  | ±0.3          |
| 2424400  | 82.6                 | 82.6 | 81.8 | 82.7                 | 82.7 | 81.8 | 0.01           | 0.01  | 0.00  | ±0.3          |
| 3070200  | 82.5                 | 82.5 | 81.5 | 82.6                 | 82.6 | 81.6 | 0.01           | 0.01  | 0.01  | ±0.3          |
| 3888000  | 82.6                 | 82.6 | 81.8 | 82.7                 | 82.7 | 81.9 | 0.01           | 0.01  | 0.01  | ±0.3          |
| 4000000  | 82.4                 | 82.4 | 81.7 | 82.5                 | 82.5 | 81.8 | 0.01           | 0.01  | 0.01  | ±0.3          |
| 4923800  | 83.0                 | 83.0 | 82.5 | 83.1                 | 83.1 | 82.6 | 0.01           | 0.01  | 0.01  | ±0.3          |
| 6235400  | 85.7                 | 85.7 | 85.0 | 85.8                 | 85.8 | 85.0 | 0.01           | 0.01  | 0.00  | ±0.3          |
| 7896400  | 88.5                 | 88.5 | 88.0 | 88.6                 | 88.5 | 88.0 | 0.01           | 0.00  | 0.00  | ±0.3          |
| 10000000 | 96.8                 | 96.8 | 96.2 | 96.9                 | 96.9 | 96.3 | 0.01           | 0.01  | 0.01  | ±0.3          |


SPEAG E-field frequency response tolerance criteria<sup>1</sup>:  
±0.3dB for applied E-fields at calibration points from 3kHz to 10MHz

<sup>1</sup>Calibration uncertainty not taken into account (shared risk 50%).

|                          |                                                                                     |                                   |                                   |
|--------------------------|-------------------------------------------------------------------------------------|-----------------------------------|-----------------------------------|
| FCC ID: A3LSMS948B       |  | WPT RF EXPOSURE EVALUATION REPORT | Reviewed by:<br>Technical Manager |
| Test Dates:<br>10/2/2025 | Apparatus/Device:<br>Portable Handset                                               |                                   | APPENDIX C:<br>Page 20 of 26      |


## Isotropy H-Field

### H-Field Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

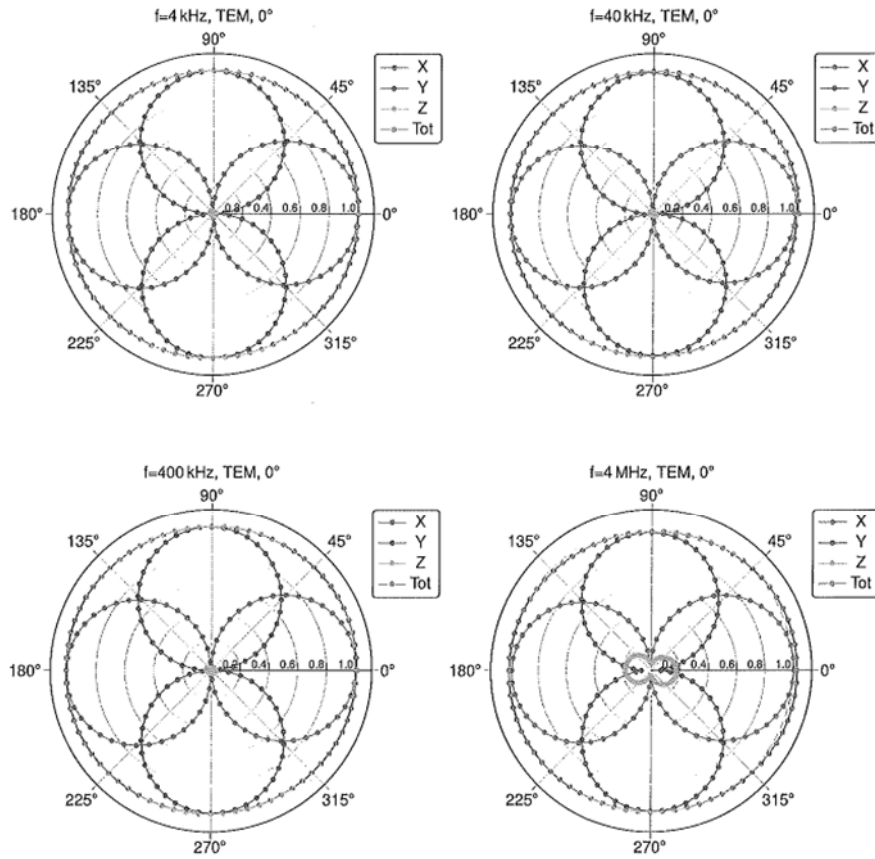


|                                 |                                                                                                                              |                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|
| FCC ID: A3LSMS948B              |  <b>WPT RF EXPOSURE EVALUATION REPORT</b> | <b>Reviewed by:</b><br>Technical Manager |
| <b>Test Dates:</b><br>10/2/2025 | <b>Apparatus/Device:</b><br>Portable Handset                                                                                 | APPENDIX C:<br>Page 21 of 26             |

H-Field Receiving Pattern ( $\phi$ ),  $\theta = 90^\circ$

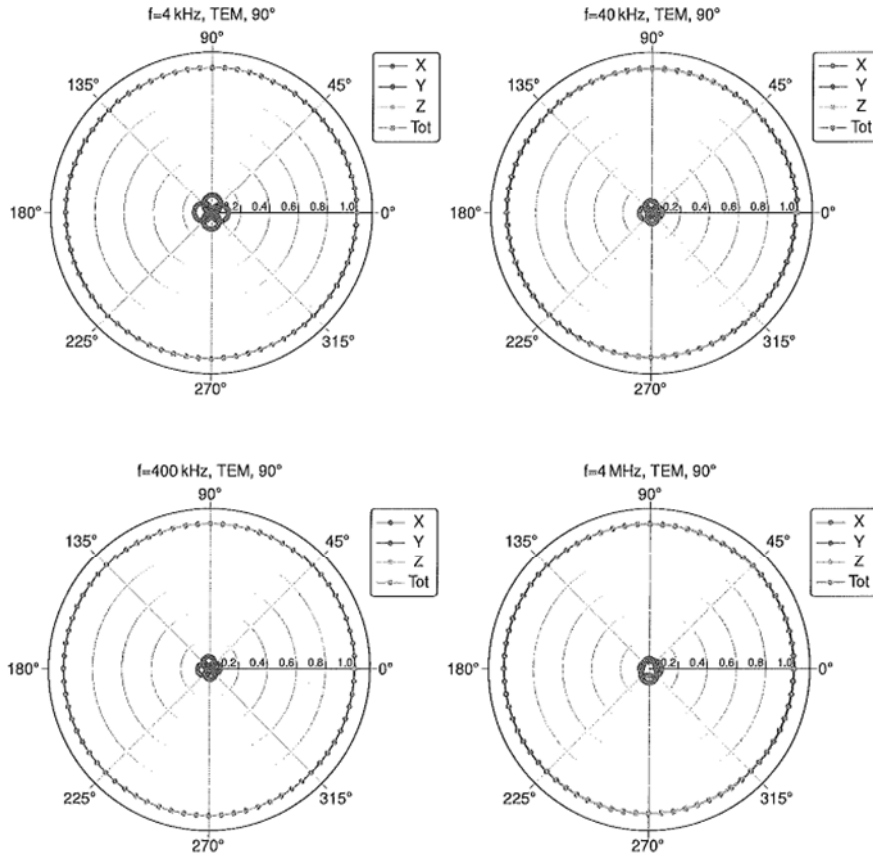


|                                 |                                                                                                                              |                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|
| FCC ID: A3LSMS948B              |  <b>WPT RF EXPOSURE EVALUATION REPORT</b> | <b>Reviewed by:</b><br>Technical Manager |
| <b>Test Dates:</b><br>10/2/2025 | <b>Apparatus/Device:</b><br>Portable Handset                                                                                 | APPENDIX C:<br>Page 22 of 26             |

### H-Field Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

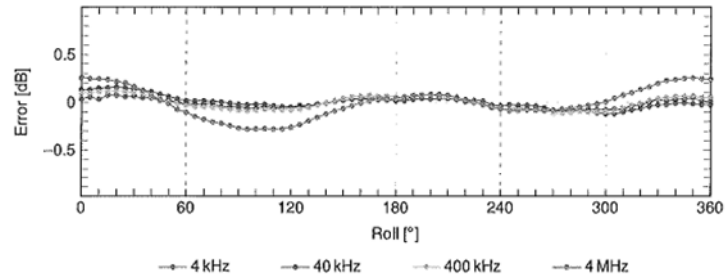

### H-Field Receiving Pattern ( $\phi$ ), $\theta = 90^\circ$

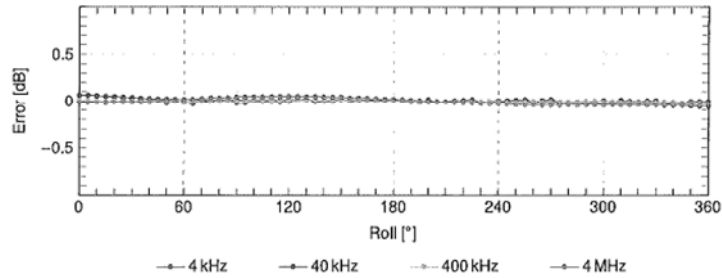


SPEAG axial deviation from the ideal response tolerance for H-field:  $\pm 0.6$  dB

|                                 |                                                                                                                              |                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|
| FCC ID: A3LSMS948B              |  <b>WPT RF EXPOSURE EVALUATION REPORT</b> | <b>Reviewed by:</b><br>Technical Manager |
| <b>Test Dates:</b><br>10/2/2025 | <b>Apparatus/Device:</b><br>Portable Handset                                                                                 | APPENDIX C:<br>Page 23 of 26             |


## Isotropy E-Field

### E-Field Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

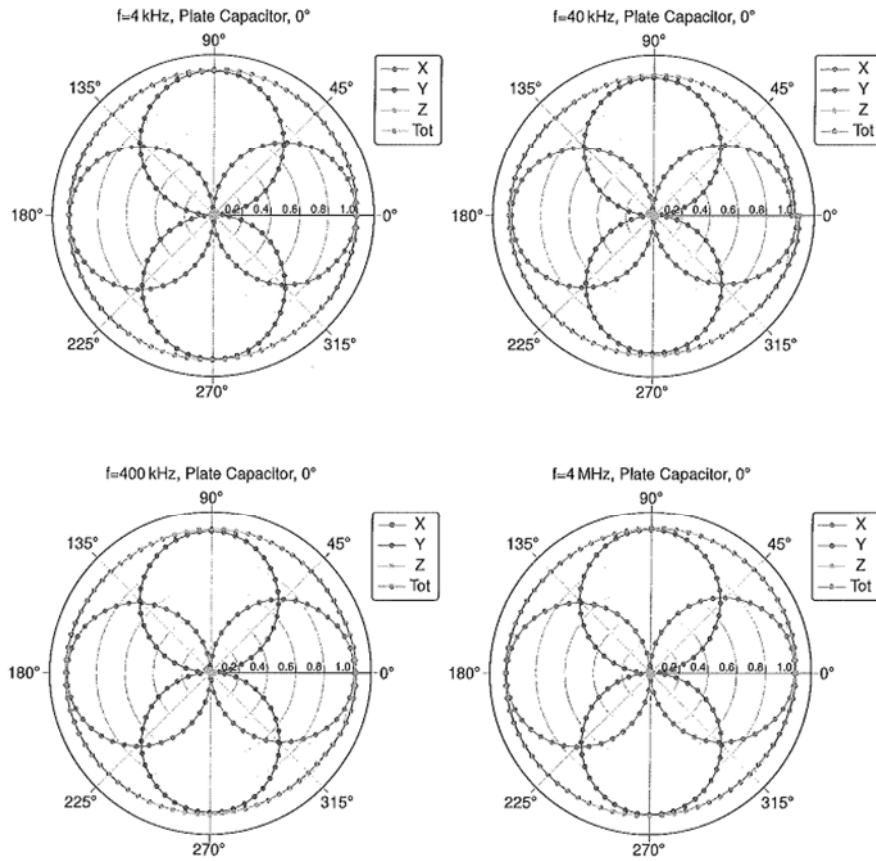


|                                 |                                                                                                                              |                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|
| FCC ID: A3LSMS948B              |  <b>WPT RF EXPOSURE EVALUATION REPORT</b> | <b>Reviewed by:</b><br>Technical Manager |
| <b>Test Dates:</b><br>10/2/2025 | <b>Apparatus/Device:</b><br>Portable Handset                                                                                 | APPENDIX C:<br>Page 24 of 26             |

E-Field Receiving Pattern ( $\phi$ ),  $\theta = 90^\circ$

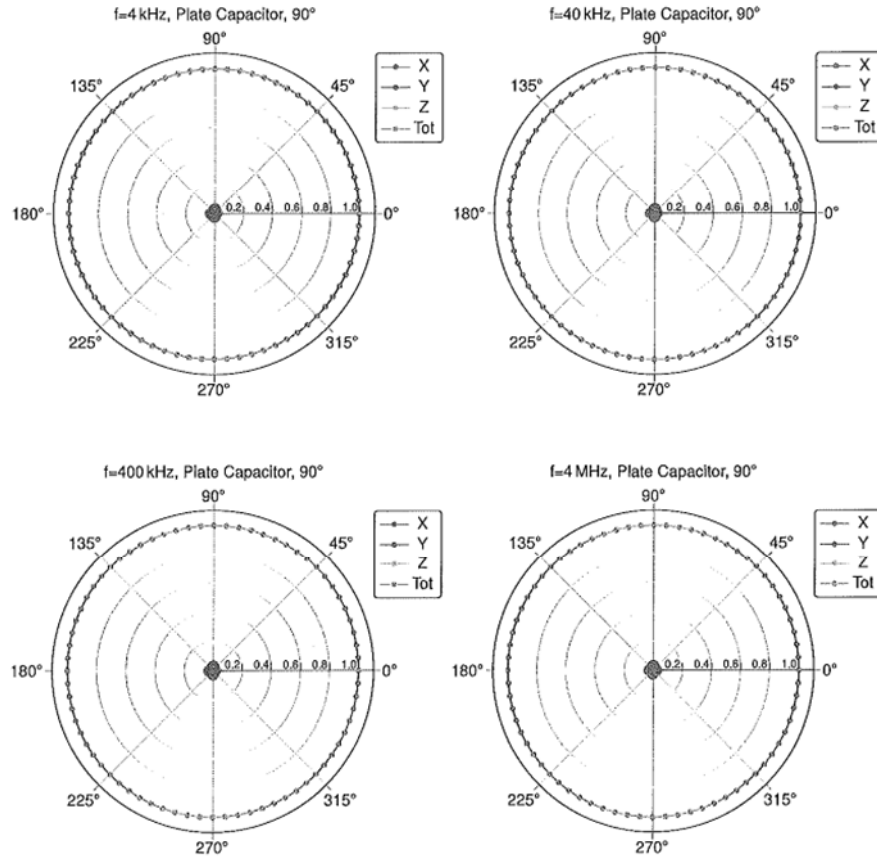


|                                 |                                                                                                                              |                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|
| FCC ID: A3LSMS948B              |  <b>WPT RF EXPOSURE EVALUATION REPORT</b> | <b>Reviewed by:</b><br>Technical Manager |
| <b>Test Dates:</b><br>10/2/2025 | <b>Apparatus/Device:</b><br>Portable Handset                                                                                 | <b>APPENDIX C:</b><br>Page 25 of 26      |

### E-Field Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

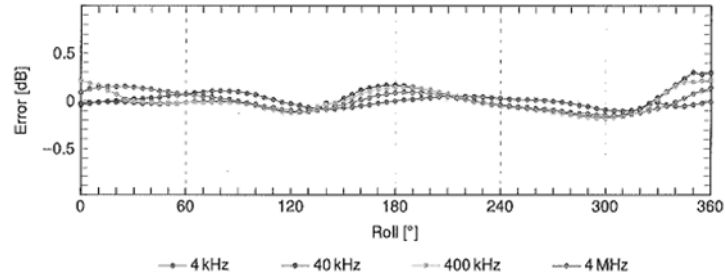

### E-Field Receiving Pattern ( $\phi$ ), $\theta = 90^\circ$

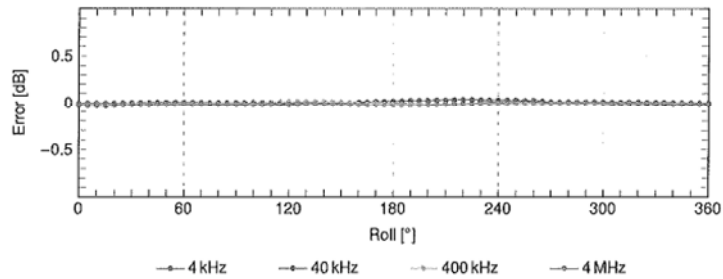

SPEAG axial deviation from the ideal response tolerance for E-field:  $\pm 0.8$  dB

|                                 |                                                                                                                              |                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|
| FCC ID: A3LSMS948B              |  <b>WPT RF EXPOSURE EVALUATION REPORT</b> | <b>Reviewed by:</b><br>Technical Manager |
| <b>Test Dates:</b><br>10/2/2025 | <b>Apparatus/Device:</b><br>Portable Handset                                                                                 | APPENDIX C:<br>Page 26 of 26             |