



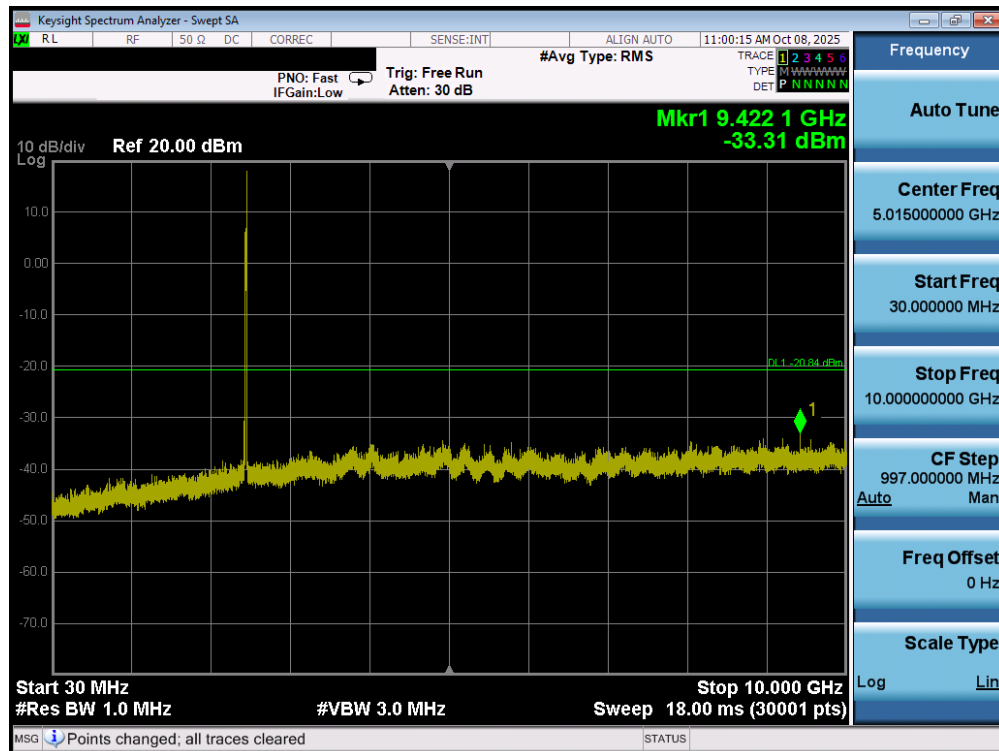


Plot 7-65. Conducted Spurious Plot MIMO ANT2 (802.11ax/be OFDMA – 26 Tones – Ch. 11)

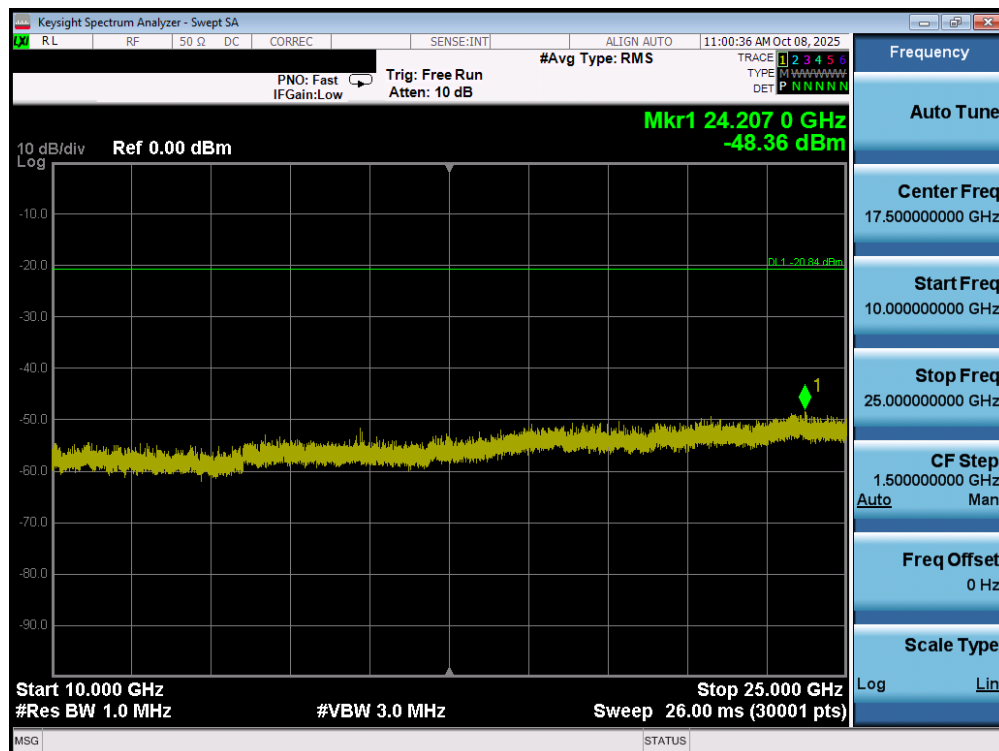


Plot 7-66. Conducted Spurious Plot MIMO ANT2 (802.11ax/be OFDMA – 26 Tones – Ch. 11)

FCC ID: A3LSMS948B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508250079-17-R1.A3L	Test Dates: 9/2/2025 - 10/14/2025	EUT Type: Portable Handset	Page 59 of 82

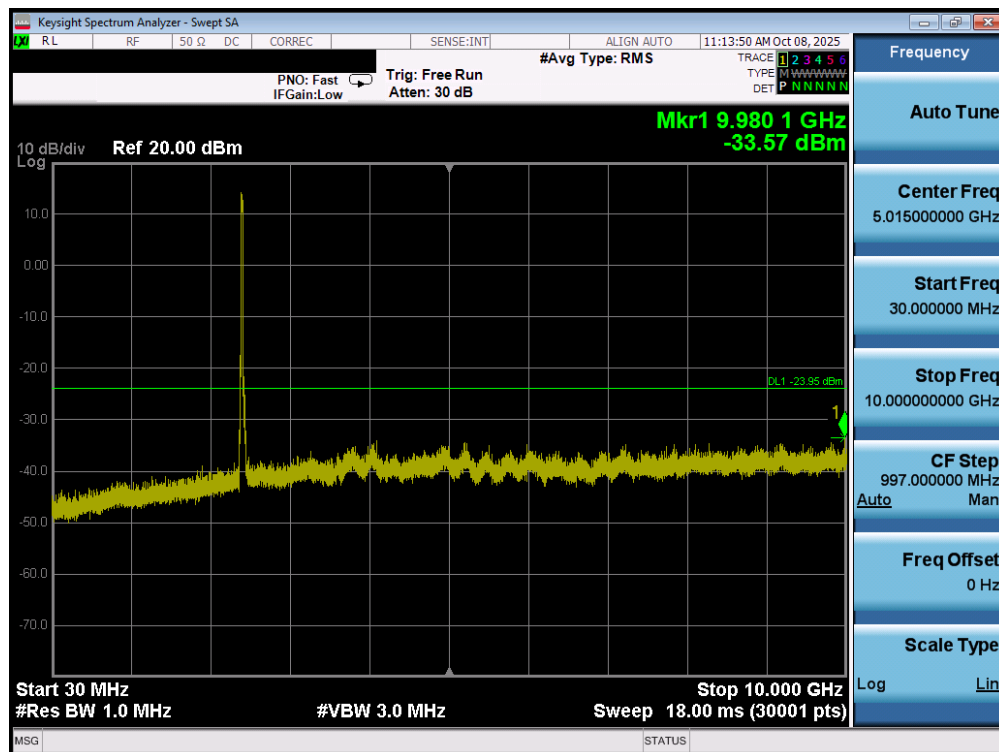


Plot 7-67. Conducted Spurious Plot MIMO ANT2 (802.11ax/be OFDMA – 242 Tones – Ch. 1)

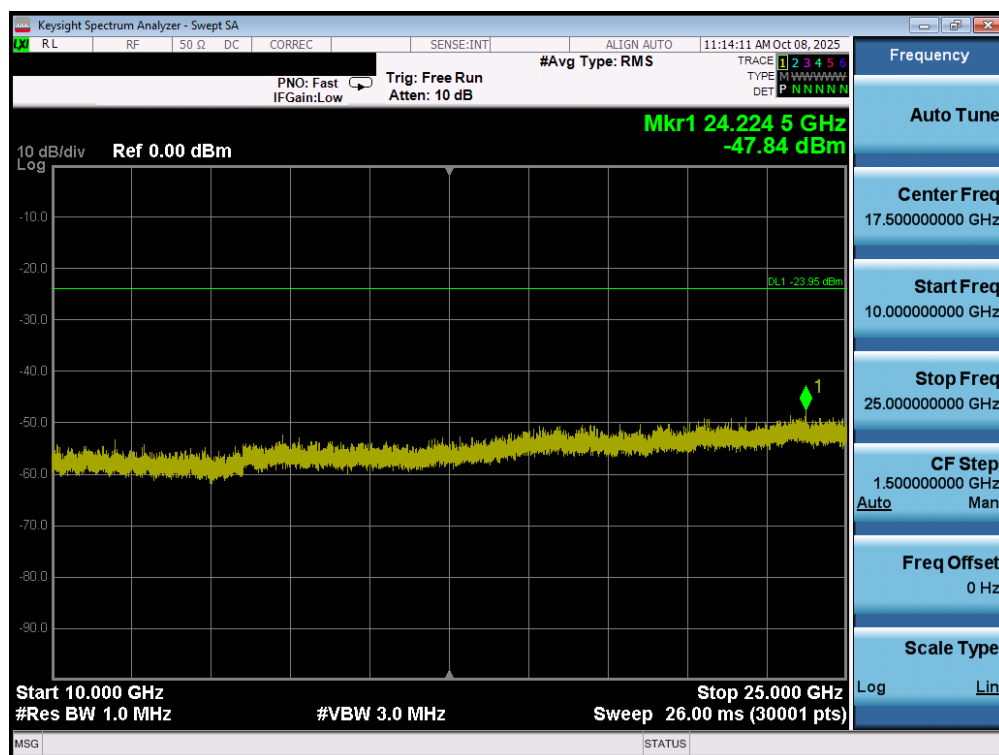


Plot 7-68. Conducted Spurious Plot MIMO ANT2 (802.11ax/be OFDMA – 242 Tones – Ch. 1)

FCC ID: A3LSMS948B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508250079-17-R1.A3L	Test Dates: 9/2/2025 - 10/14/2025	EUT Type: Portable Handset	Page 60 of 82

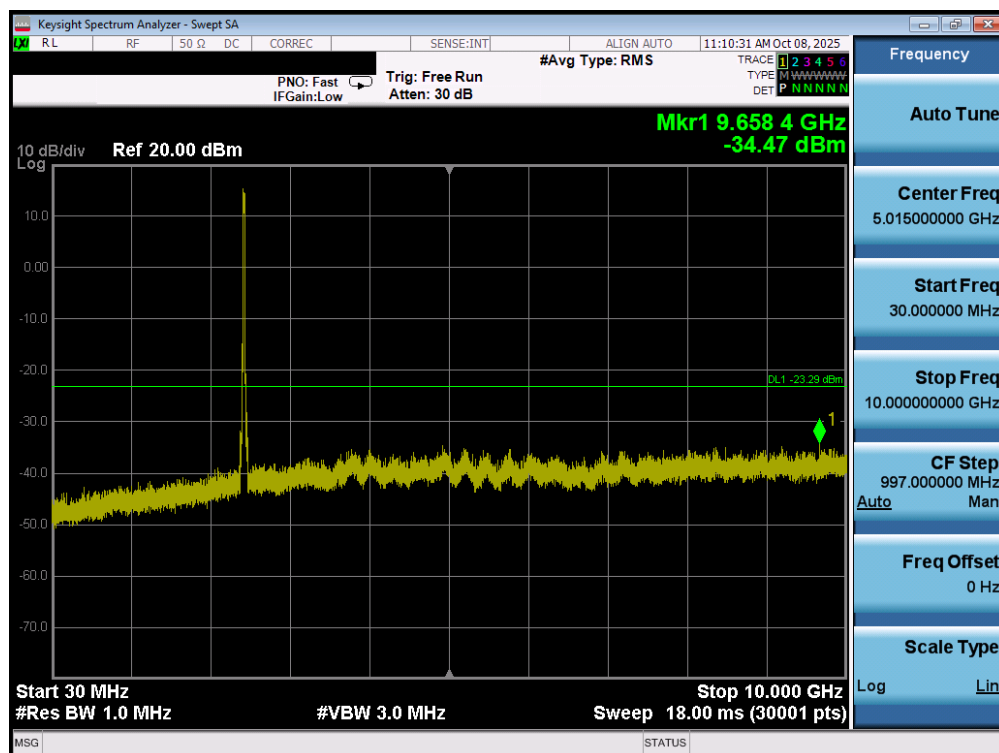


Plot 7-69. Conducted Spurious Plot MIMO ANT2 (802.11ax/be OFDMA – 242 Tones – Ch. 6)

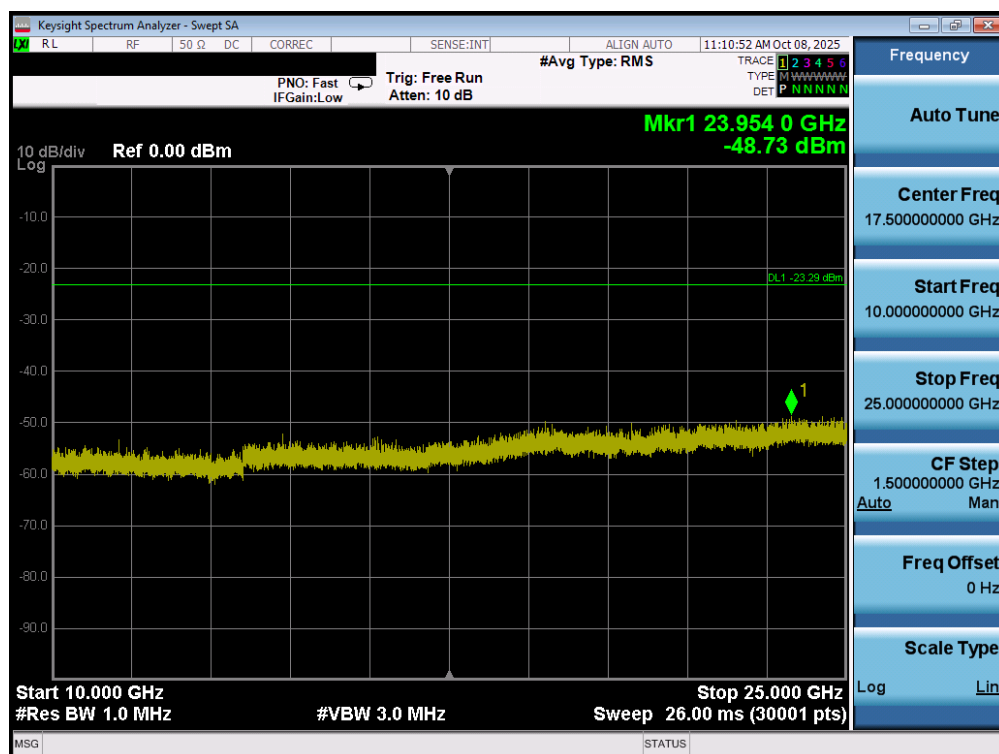


Plot 7-70. Conducted Spurious Plot MIMO ANT2 (802.11ax/be OFDMA – 242 Tones – Ch. 6)

FCC ID: A3LSMS948B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508250079-17-R1.A3L	Test Dates: 9/2/2025 - 10/14/2025	EUT Type: Portable Handset	Page 61 of 82

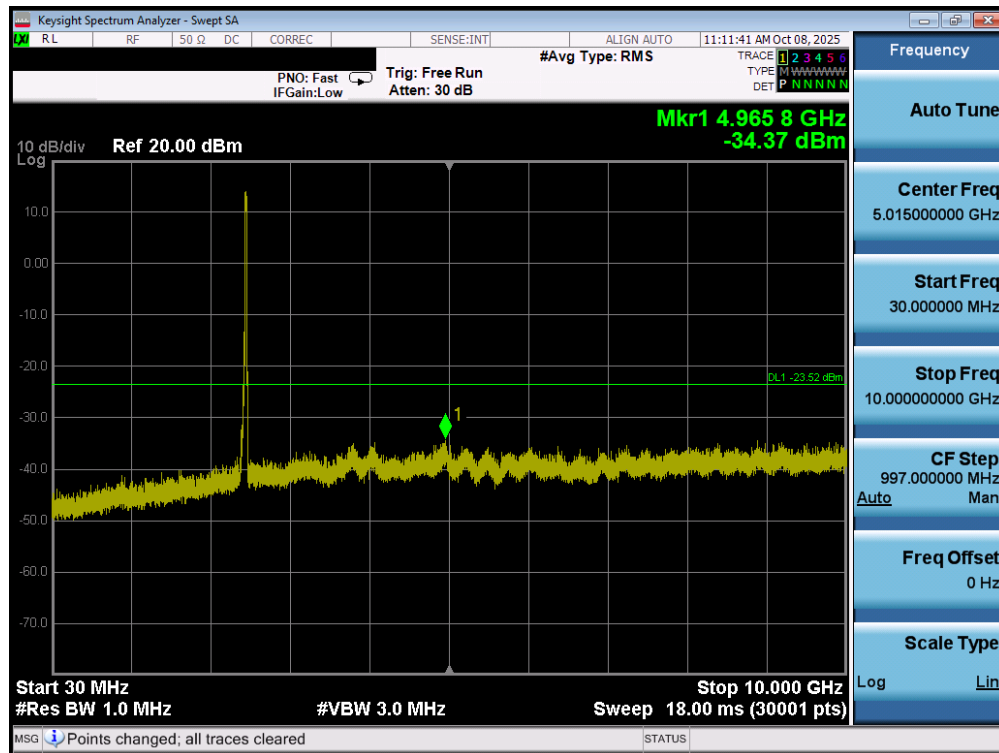

Plot 7-71. Conducted Spurious Plot MIMO ANT2 (802.11ax/be OFDMA – 242 Tones – Ch. 11)

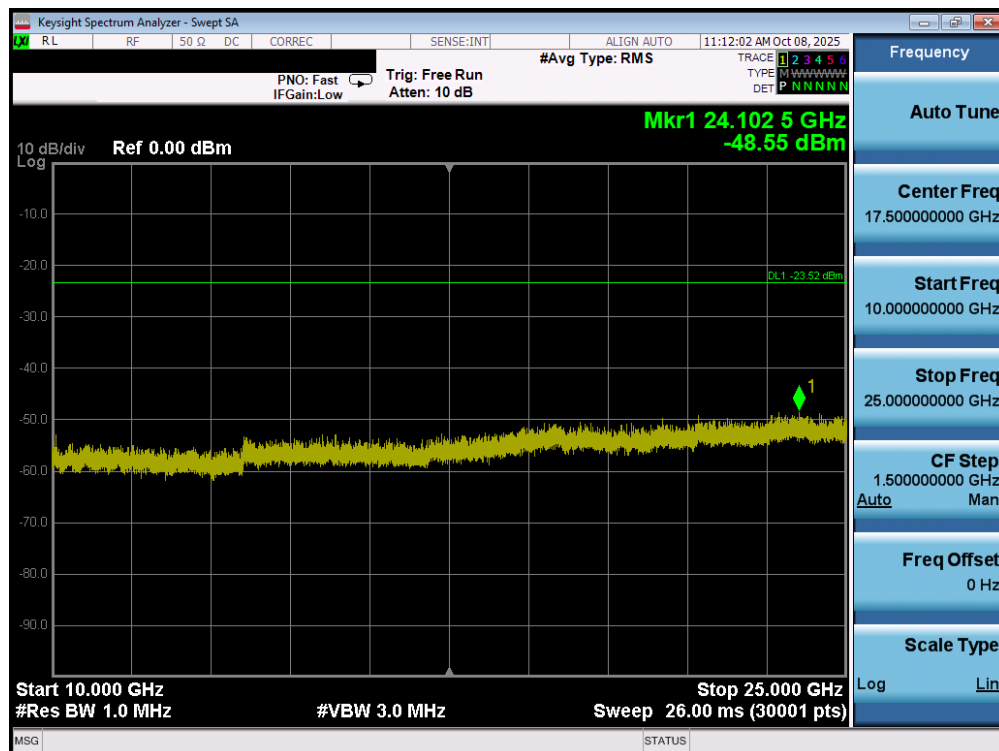

Plot 7-72. Conducted Spurious Plot MIMO ANT2 (802.11ax/be OFDMA – 242 Tones – Ch. 11)

FCC ID: A3LSMS948B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508250079-17-R1.A3L	Test Dates: 9/2/2025 - 10/14/2025	EUT Type: Portable Handset	Page 62 of 82

7.7 Radiated Emission Measurements

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in FCC §15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown FCC §15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-10. Radiated Limits

Test Procedures Used

ANSI C63.10:2020 – Section 6.6.4.3

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

FCC ID: A3LSMS948B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508250079-17-R1.A3L	Test Dates: 9/2/2025 - 10/14/2025	EUT Type: Portable Handset	Page 63 of 82

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

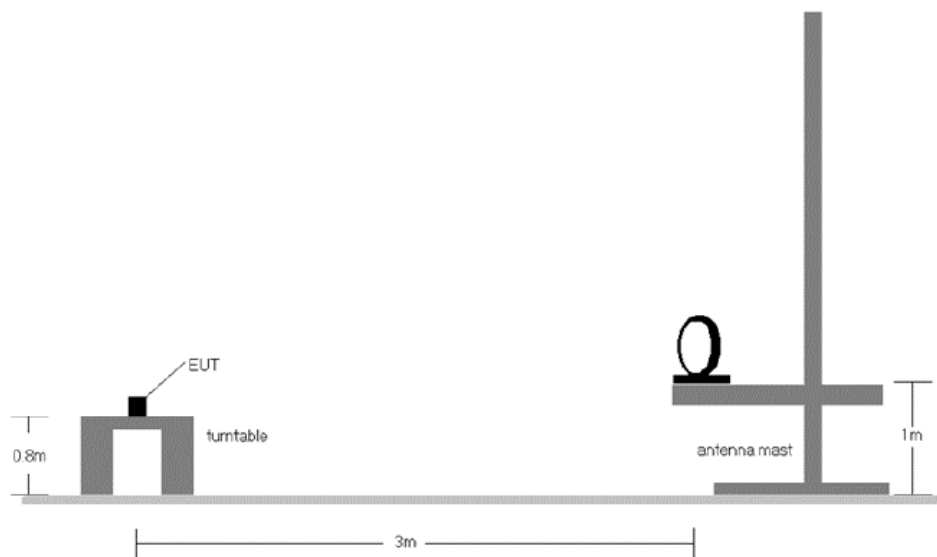


Figure 7-6. Radiated Test Setup < 30MHz

FCC ID: A3LSMS948B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508250079-17-R1.A3L	Test Dates: 9/2/2025 - 10/14/2025	EUT Type: Portable Handset	Page 64 of 82

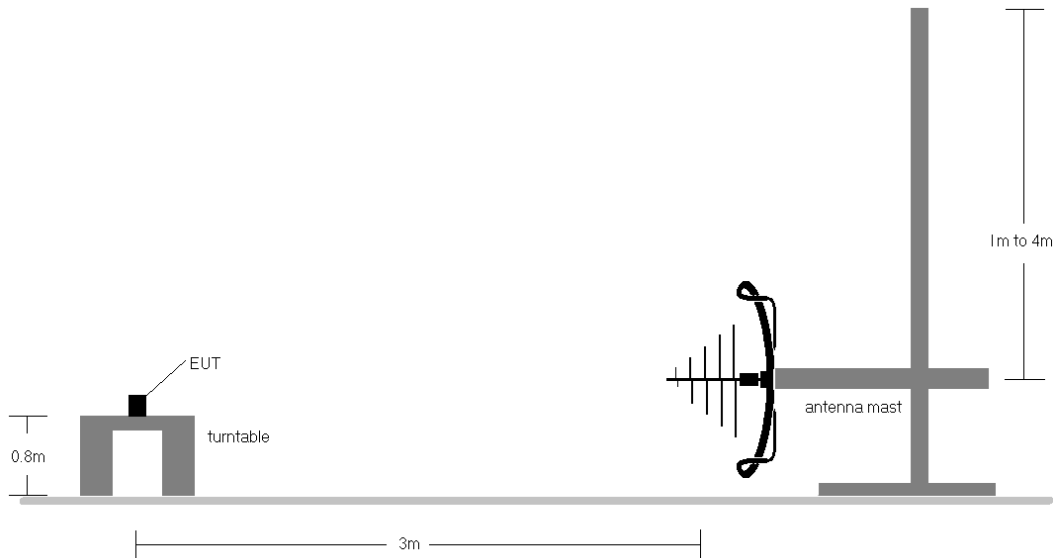


Figure 7-7. Radiated Test Setup < 1GHz

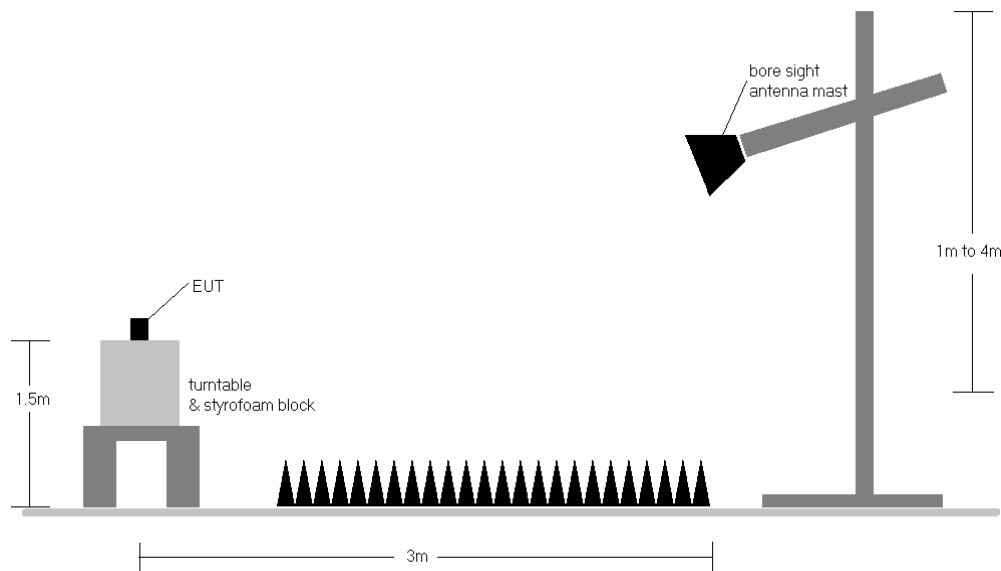


Figure 7-8. Test Instrument & Measurement Setup

Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of ANSI C63.10:2020 Section 11.12.2 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limits shown in §15.209.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.

FCC ID: A3LSMS948B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508250079-17-R1.A3L	Test Dates: 9/2/2025 - 10/14/2025	EUT Type: Portable Handset	Page 65 of 82

4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
9. Some band edge measurements were performed using a channel integration method to determine compliance with the out of band average radiated spurious emissions limit in the 2483.5 – 2500MHz band. A measurement was performed using a RBW of 100kHz at the frequency with highest emission outside of band edge. For integration that does not start at 2483.5MHz, consideration was taken to ensure the worst-case emission is in the 1MHz spectrum. The results were integrated up to the 1MHz reference bandwidth to show compliance with the 15.209 radiated limit for emissions greater than 1GHz.
10. For radiated measurements, emissions were investigated for the fully-loaded RU configuration and for all the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level}_{[dBm]} + 107 + \text{AFCL}_{[dB/m]}$
- $\text{AFCL}_{[dB/m]} = \text{Antenna Factor}_{[dB/m]} + \text{Cable Loss}_{[dB]}$
- $\text{Margin}_{[dB]} = \text{Field Strength Level}_{[dB\mu V/m]} - \text{Limit}_{[dB\mu V/m]}$

Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots in Section 7.7 was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: A3LSMS948B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508250079-17-R1.A3L	Test Dates: 9/2/2025 - 10/14/2025	EUT Type: Portable Handset	Page 66 of 82


7.7.1 MIMO Radiated Spurious Emission Measurements

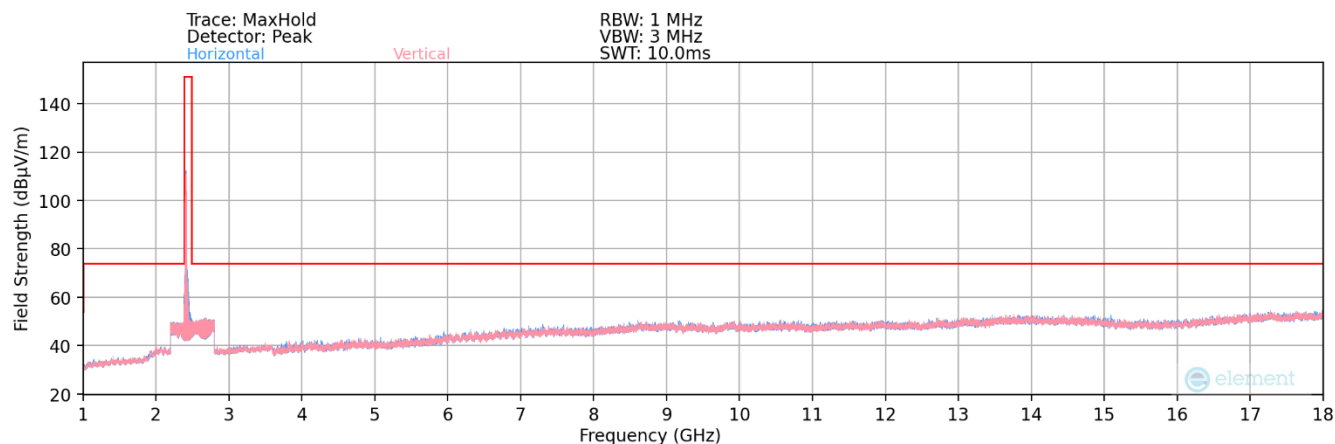

Plot 7-73. Radiated Spurious Plot above 1GHz MIMO (802.11ax/be OFDMA – 26 Tones – Ch. 1)

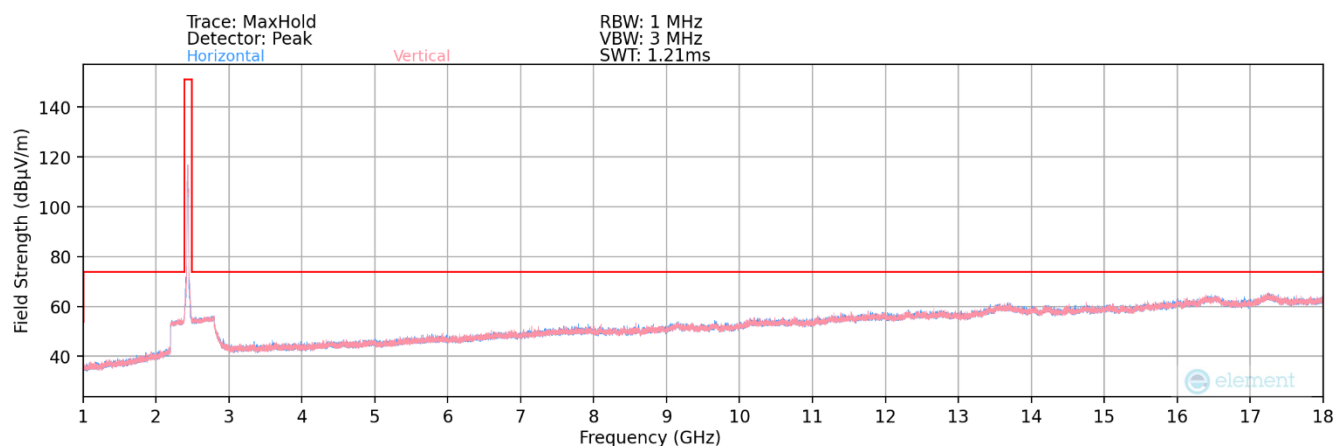


Plot 7-74. Radiated Spurious Plot above 1GHz MIMO (802.11ax/be OFDMA – 26 Tones – Ch. 6)

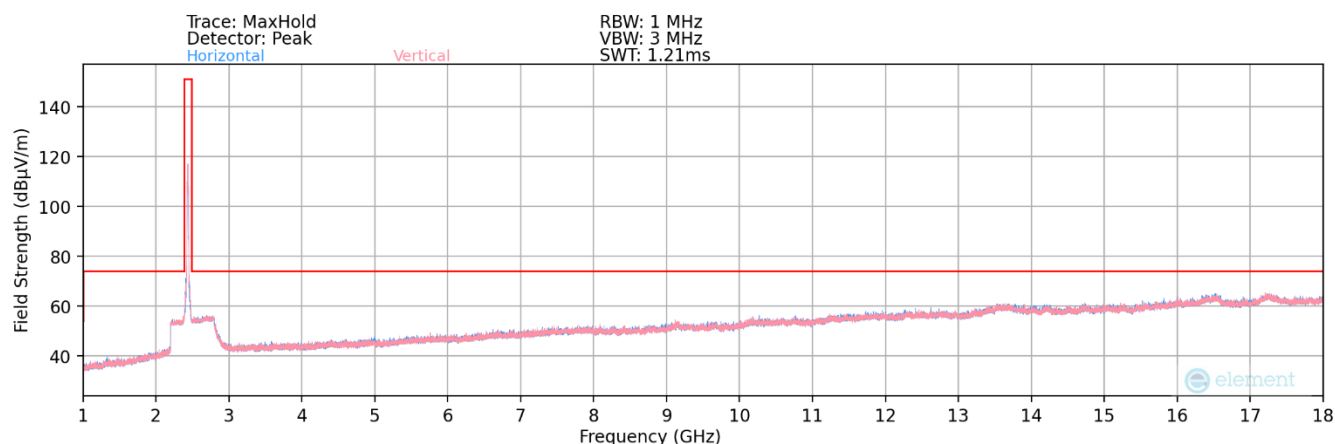


Plot 7-75. Radiated Spurious Plot above 1GHz MIMO (802.11ax/be OFDMA – 26 Tones – Ch. 11)

FCC ID: A3LSMS948B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508250079-17-R1.A3L	Test Dates: 9/2/2025 - 10/14/2025	EUT Type: Portable Handset	Page 67 of 82

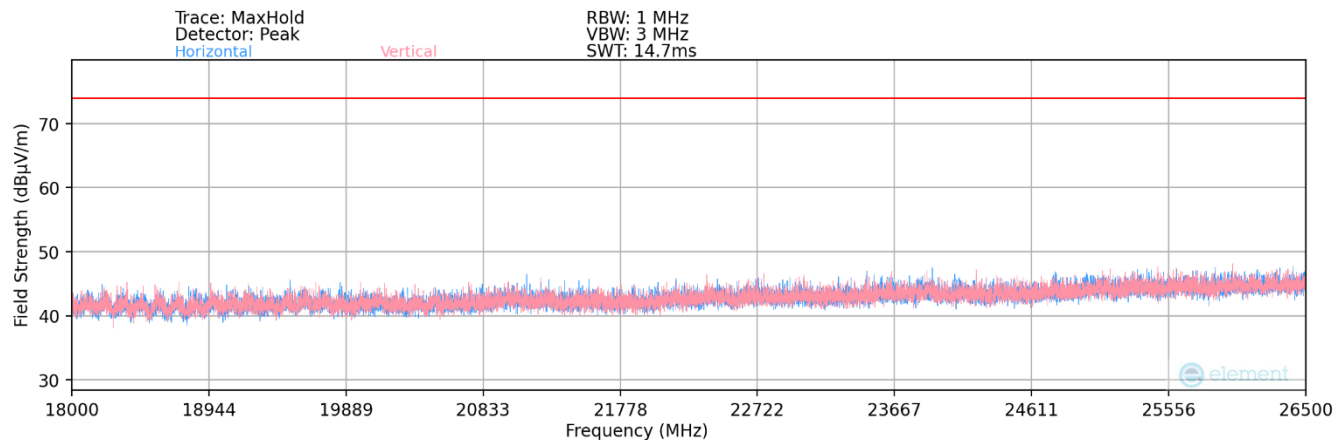


Plot 7-76. Radiated Spurious Plot above 18GHz MIMO (802.11ax/be OFDMA – 26 Tones)

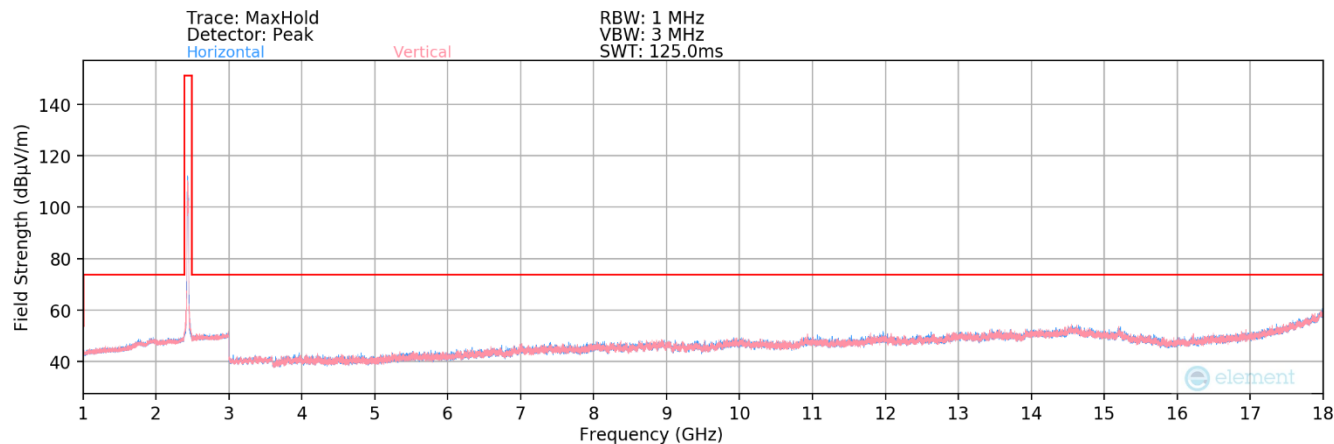


Plot 7-77. Radiated Spurious Plot above 1GHz MIMO (802.11ax/be OFDMA – MRU 52+26 Tones – Ch. 6)


FCC ID: A3LSMS948B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508250079-17-R1.A3L	Test Dates: 9/2/2025 - 10/14/2025	EUT Type: Portable Handset	Page 68 of 82

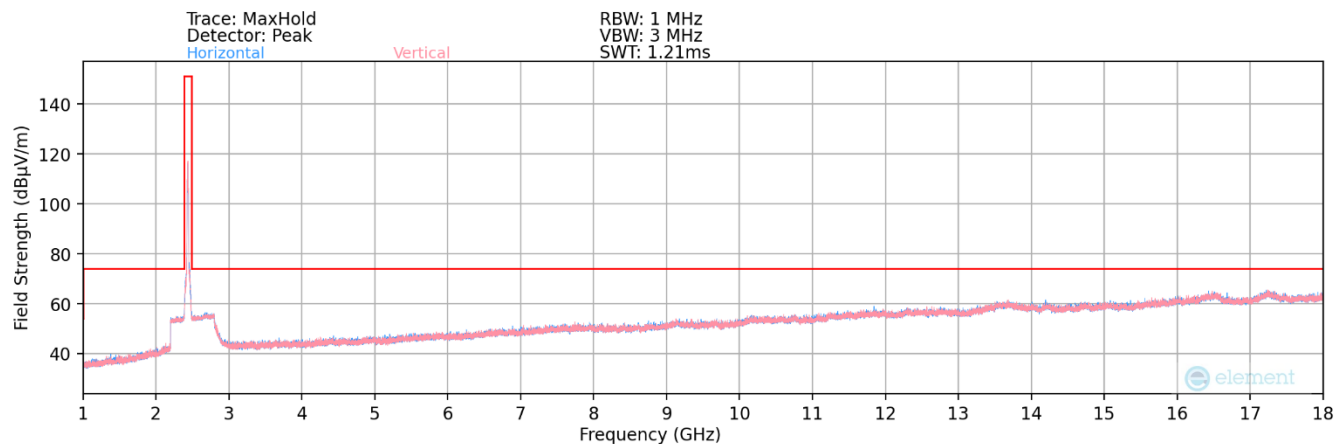

Plot 7-78. Radiated Spurious Plot above 1GHz MIMO (802.11ax/be OFDMA – 242 Tones – Ch. 1)

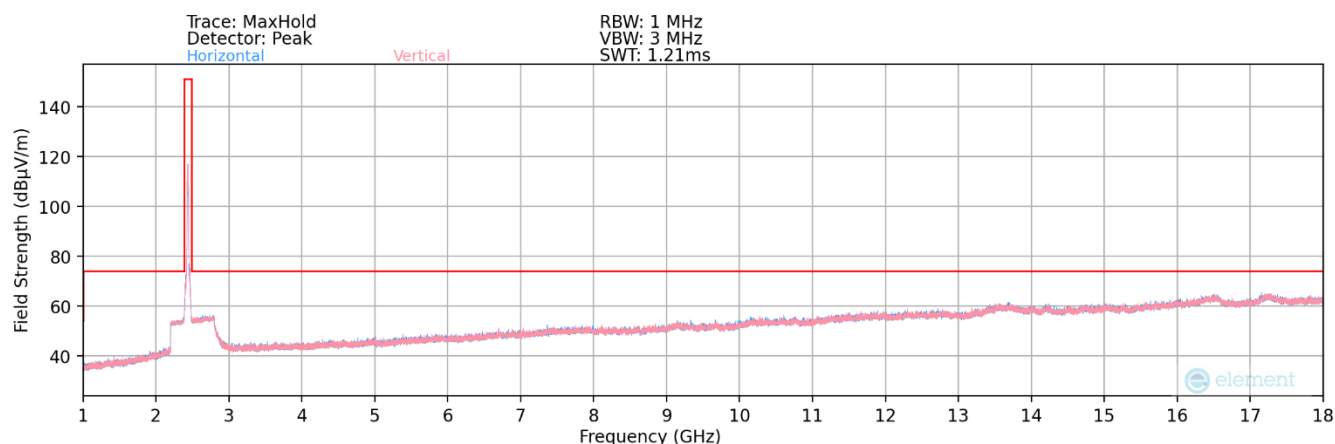


Plot 7-79. Radiated Spurious Plot above 1GHz MIMO (802.11ax/be OFDMA – 242 Tones – Ch. 6)

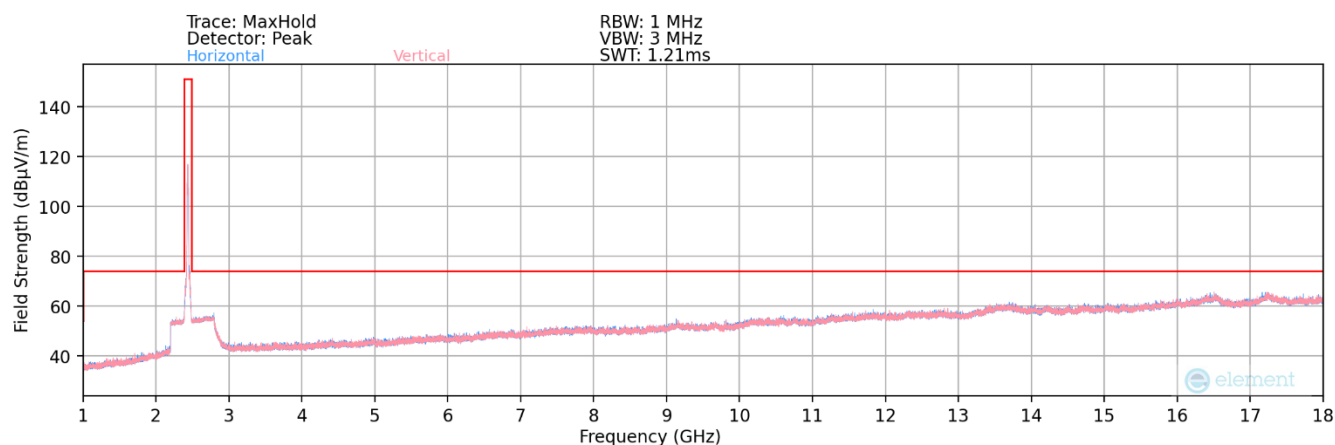

Plot 7-80. Radiated Spurious Plot above 1GHz MIMO (802.11ax/be OFDMA – 242 Tones – Ch. 11)

FCC ID: A3LSMS948B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508250079-17-R1.A3L	Test Dates: 9/2/2025 - 10/14/2025	EUT Type: Portable Handset	Page 69 of 82

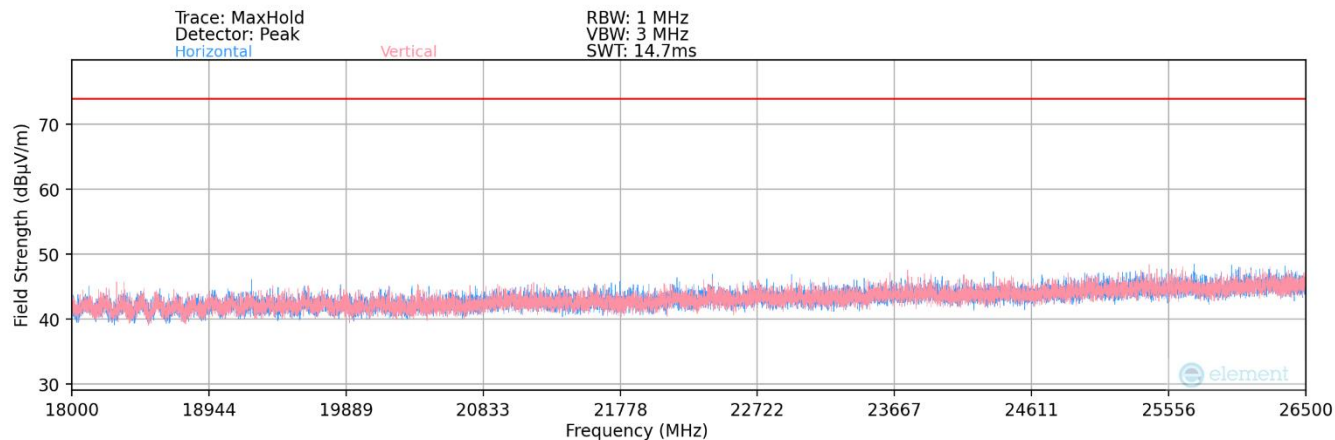

Plot 7-81. Radiated Spurious Plot above 18GHz MIMO (802.11ax/be OFDMA – 242 Tones)

FCC ID: A3LSMS948B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508250079-17-R1.A3L	Test Dates: 9/2/2025 - 10/14/2025	EUT Type: Portable Handset	Page 70 of 82

MIMO Radiated Spurious Emission Measurements

Worst Case Mode:	802.11ax/be OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	4
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	H	157	349	-76.04	2.60	33.56	53.98	-20.42
4824.00	Peak	H	157	349	-63.51	2.60	46.09	73.98	-27.89
12060.00	Avg	H	-	-	-81.00	13.46	39.46	53.98	-14.52
12060.00	Peak	H	-	-	-69.02	13.46	51.44	73.98	-22.54

Table 7-11. Radiated Measurements MIMO (26 Tones)

Worst Case Mode:	802.11ax/be OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	4
Distance of Measurements:	3 Meters
Operating Frequency:	2437MHz
Channel:	6

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	H	152	353	-76.86	2.83	32.97	53.98	-21.01
4874.00	Peak	H	152	353	-64.42	2.83	45.41	73.98	-28.57
7311.00	Avg	H	-	-	-79.42	9.49	37.07	53.98	-16.91
7311.00	Peak	H	-	-	-67.21	9.49	49.28	73.98	-24.70
12185.00	Avg	H	-	-	-80.80	12.75	38.95	53.98	-15.03
12185.00	Peak	H	-	-	-69.17	12.75	50.58	73.98	-23.40

Table 7-12. Radiated Measurements MIMO (26 Tones)

FCC ID: A3LSMS948B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508250079-17-R1.A3L	Test Dates: 9/2/2025 - 10/14/2025	EUT Type: Portable Handset	Page 71 of 82

Worst Case Mode: 802.11ax/be OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	158	353	-76.99	2.71	32.72	53.98	-21.26
4924.00	Peak	H	158	353	-65.00	2.71	44.71	73.98	-29.27
7386.00	Avg	H	-	-	-79.23	9.42	37.19	53.98	-16.79
7386.00	Peak	H	-	-	-67.03	9.42	49.39	73.98	-24.59
12310.00	Avg	H	-	-	-80.67	13.07	39.40	53.98	-14.58
12310.00	Peak	H	-	-	-68.73	13.07	51.34	73.98	-22.64

Table 7-13. Radiated Measurements MIMO (26 Tones)

Worst Case Mode: 802.11ax/be OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	H	-	-	-78.24	2.60	31.36	53.98	-22.62
4824.00	Peak	H	-	-	-66.26	2.60	43.34	73.98	-30.64
12060.00	Avg	H	-	-	-80.97	13.46	39.49	53.98	-14.49
12060.00	Peak	H	-	-	-68.97	13.46	51.49	73.98	-22.49

Table 7-14. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMS948B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508250079-17-R1.A3L	Test Dates: 9/2/2025 - 10/14/2025	EUT Type: Portable Handset	Page 72 of 82

Worst Case Mode: 802.11ax/be OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 6

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	H	-	-	-78.41	2.83	31.42	53.98	-22.56
4874.00	Peak	H	-	-	-66.23	2.83	43.60	73.98	-30.38
7311.00	Avg	H	-	-	-79.26	9.49	37.23	53.98	-16.75
7311.00	Peak	H	-	-	-67.01	9.49	49.48	73.98	-24.50
12185.00	Avg	H	-	-	-80.77	12.75	38.98	53.98	-15.00
12185.00	Peak	H	-	-	-68.74	12.75	51.01	73.98	-22.97

Table 7-15. Radiated Measurements MIMO (242 Tones)

Worst Case Mode: 802.11ax/be OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	-	-	-78.48	2.71	31.23	53.98	-22.75
4924.00	Peak	H	-	-	-66.44	2.71	43.27	73.98	-30.71
7386.00	Avg	H	-	-	-79.45	9.42	36.97	53.98	-17.01
7386.00	Peak	H	-	-	-67.38	9.42	49.04	73.98	-24.94
12310.00	Avg	H	-	-	-80.80	13.07	39.27	53.98	-14.71
12310.00	Peak	H	-	-	-68.91	13.07	51.16	73.98	-22.82


Table 7-16. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMS948B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508250079-17-R1.A3L	Test Dates: 9/2/2025 - 10/14/2025	EUT Type: Portable Handset	Page 73 of 82


7.7.2 MIMO Radiated Restricted Band Edge Measurements

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11ax/be OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	53
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

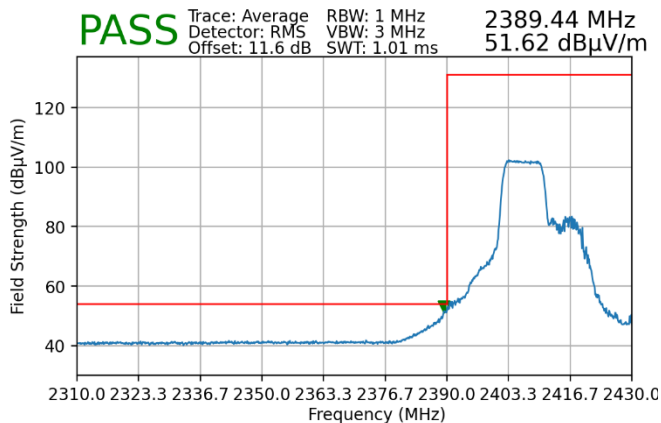


Plot 7-82. Radiated Restricted Lower Band Edge Measurement MIMO (Average – 106 Tones)

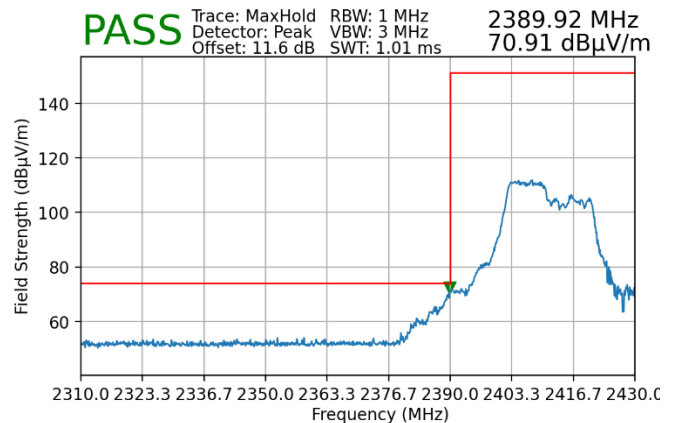


Plot 7-83. Radiated Restricted Lower Band Edge Measurement MIMO (Peak – 106 Tones)

Worst Case Mode:	802.11ax/be OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	54
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

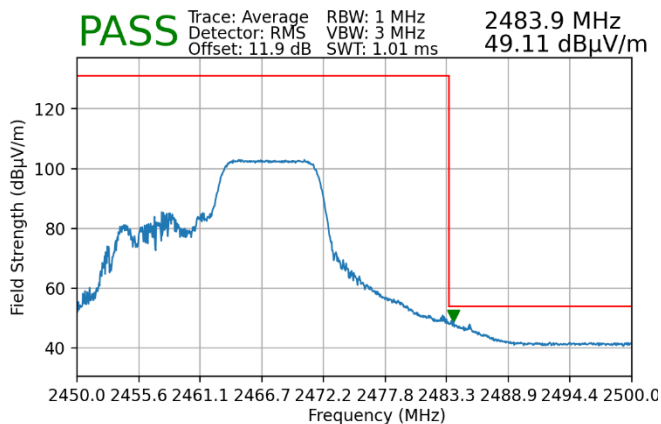


Plot 7-84. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 106 Tones)

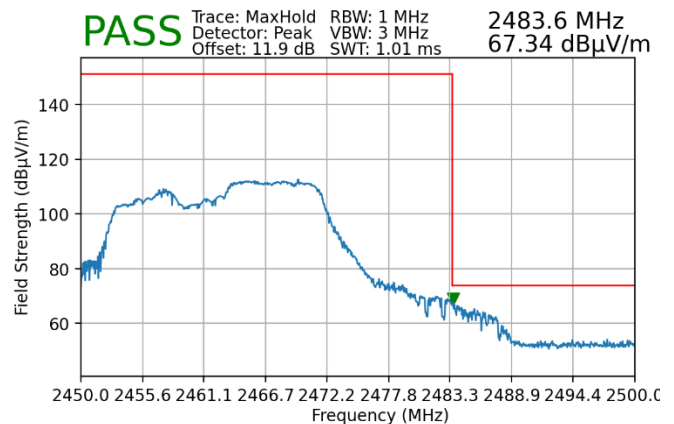


Plot 7-85. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 106 Tones)

FCC ID: A3LSMS948B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508250079-17-R1.A3L	Test Dates: 9/2/2025 - 10/14/2025	EUT Type: Portable Handset	Page 74 of 82

Worst Case Mode: 802.11ax/be OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 54
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

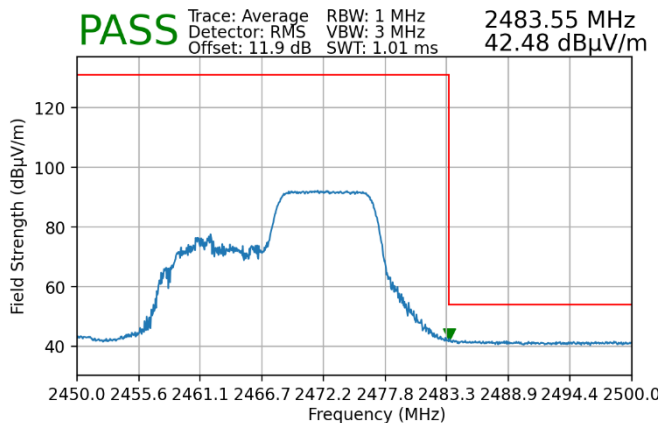


Plot 7-86. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 106 Tones)

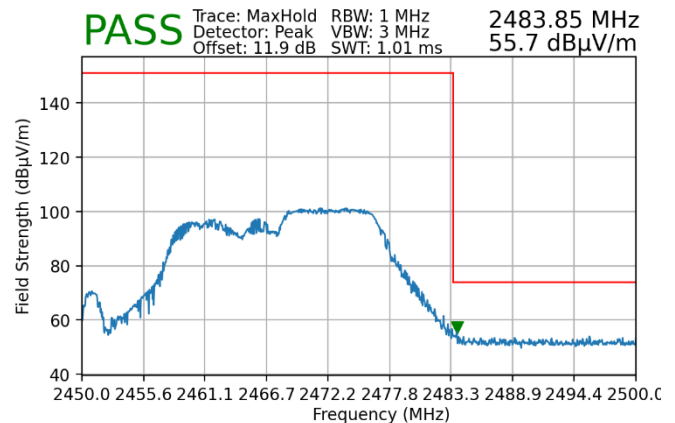


Plot 7-87. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 106 Tones)

Worst Case Mode: 802.11ax/be OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 54
 Distance of Measurements: 3 Meters
 Operating Frequency: 2472MHz
 Channel: 13

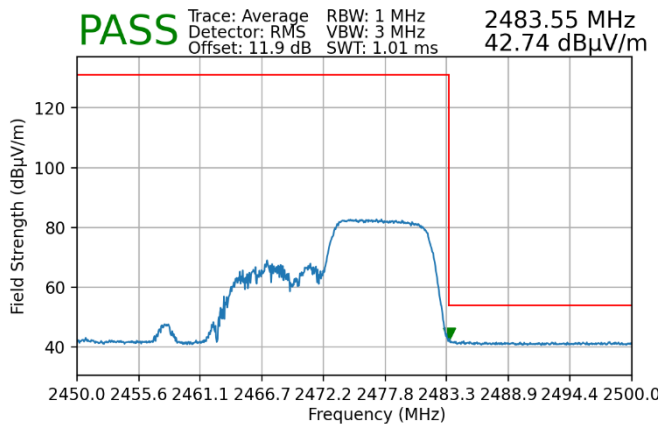


Plot 7-88. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 106 Tones)

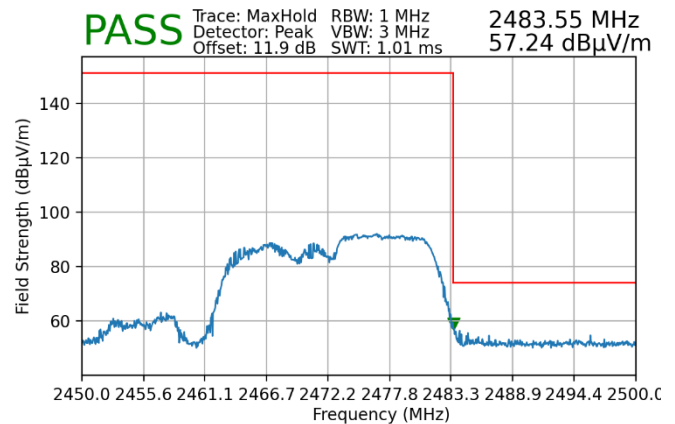


Plot 7-89. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 106 Tones)

FCC ID: A3LSMS948B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508250079-17-R1.A3L	Test Dates: 9/2/2025 - 10/14/2025	EUT Type: Portable Handset	Page 75 of 82

Worst Case Mode: 802.11be OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 82
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

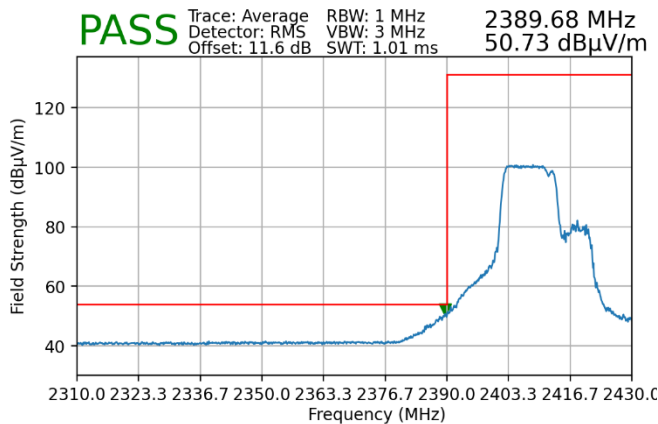


Plot 7-90. Radiated Restricted Lower Band Edge Measurement MIMO (Average – 106+26 Tones)

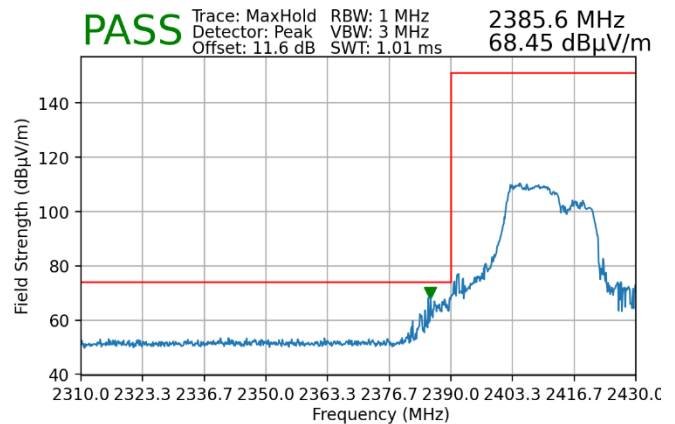


Plot 7-91. Radiated Restricted Lower Band Edge Measurement MIMO (Peak – 106+26 Tones)

Worst Case Mode: 802.11be OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 83
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

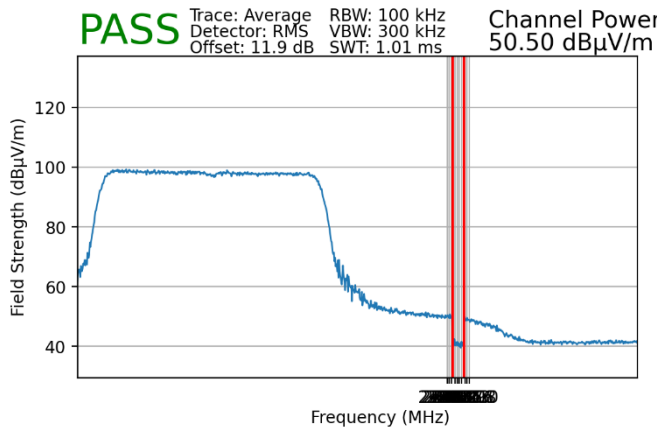


Plot 7-92. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 106+26 Tones)

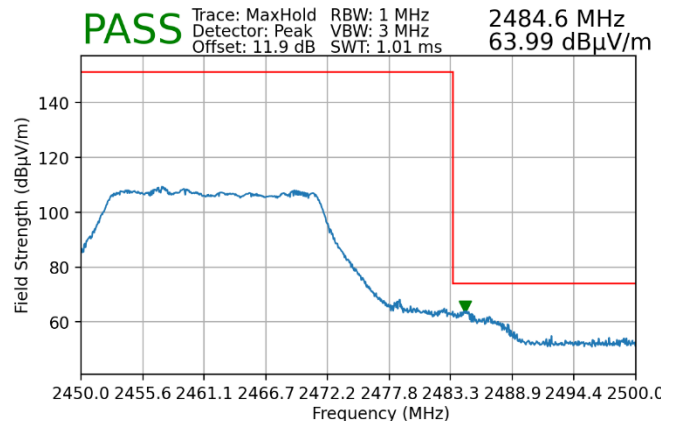


Plot 7-93. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 106+26 Tones)

FCC ID: A3LSMS948B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508250079-17-R1.A3L	Test Dates: 9/2/2025 - 10/14/2025	EUT Type: Portable Handset	Page 76 of 82

Worst Case Mode:	802.11be OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	83
Distance of Measurements:	3 Meters
Operating Frequency:	2467MHz
Channel:	12

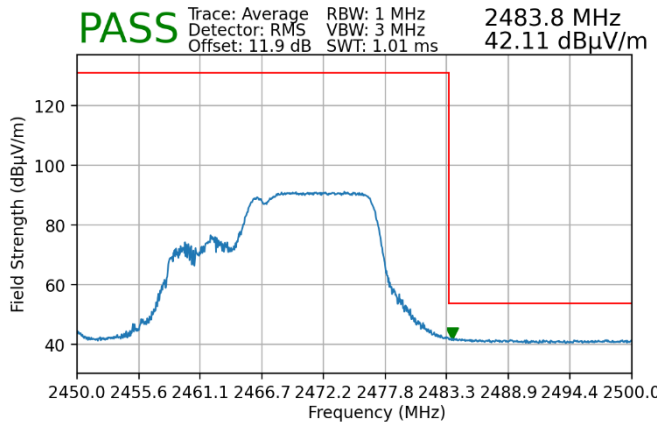


Plot 7-94. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 106+26 Tones)

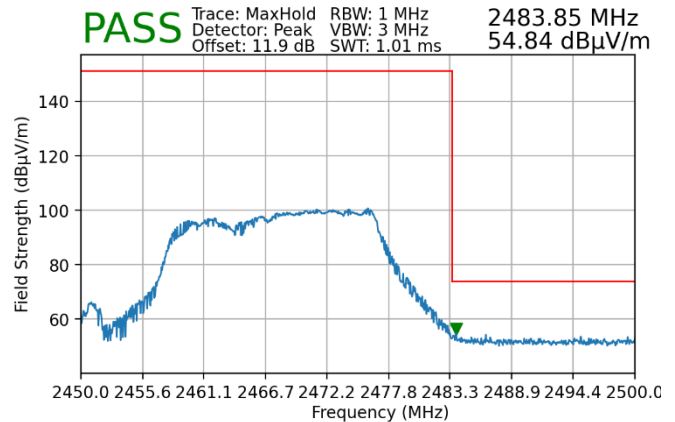


Plot 7-95. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 106+26 Tones)

Worst Case Mode:	802.11be OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	83
Distance of Measurements:	3 Meters
Operating Frequency:	2472MHz
Channel:	13

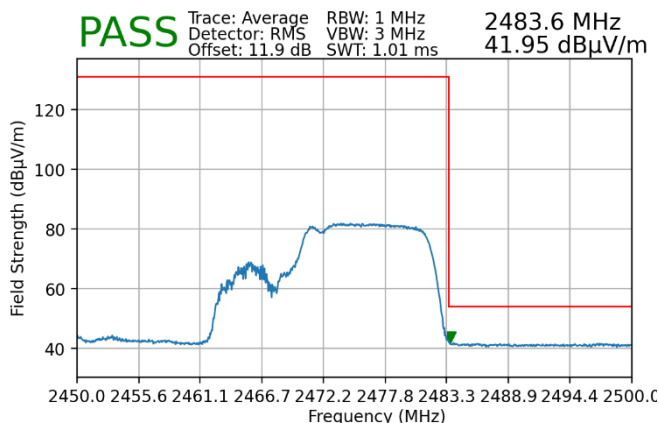


Plot 7-96. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 106+26 Tones)

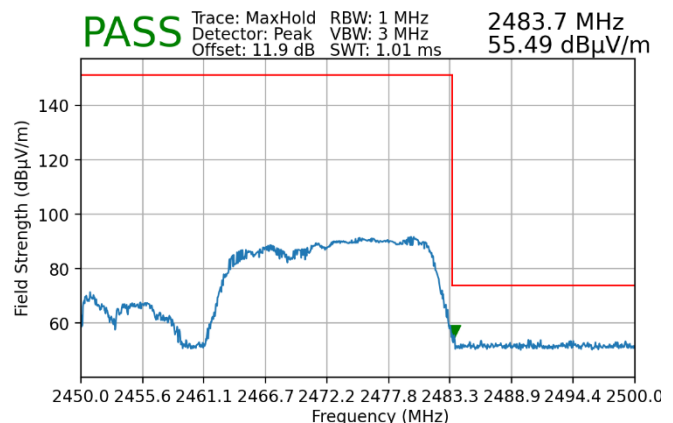


Plot 7-97. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 106+26 Tones)

FCC ID: A3LSMS948B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508250079-17-R1.A3L	Test Dates: 9/2/2025 - 10/14/2025	EUT Type: Portable Handset	Page 77 of 82

Worst Case Mode: 802.11ax/be OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

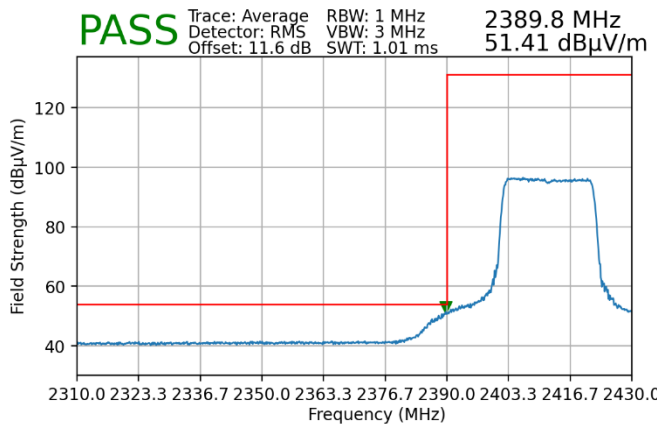


Plot 7-98. Radiated Restricted Lower Band Edge Measurement MIMO (Average – 242 Tones)

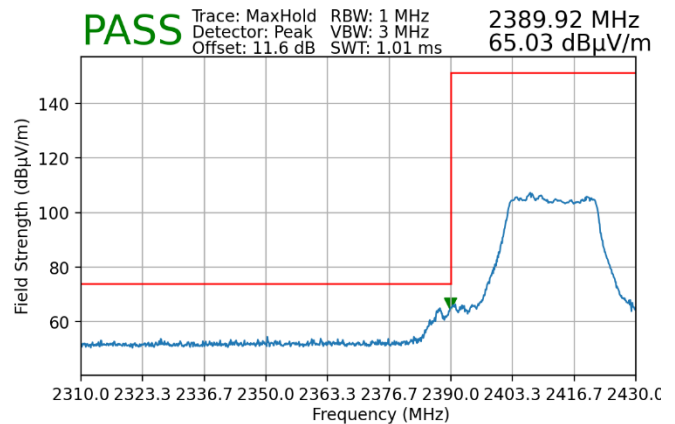


Plot 7-99. Radiated Restricted Lower Band Edge Measurement MIMO (Peak – 242 Tones)

Worst Case Mode: 802.11ax/be OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

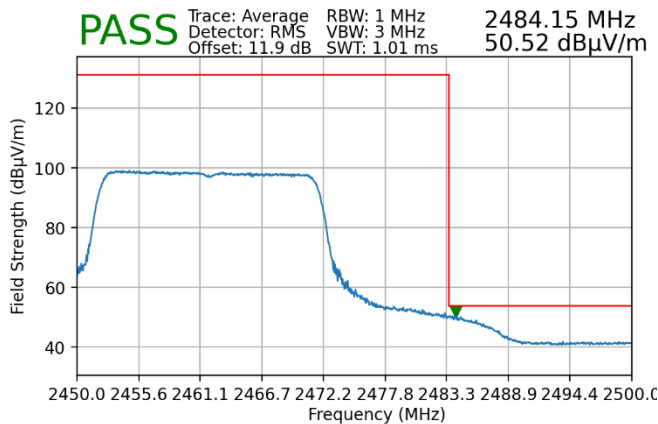


Plot 7-100. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 242 Tones)

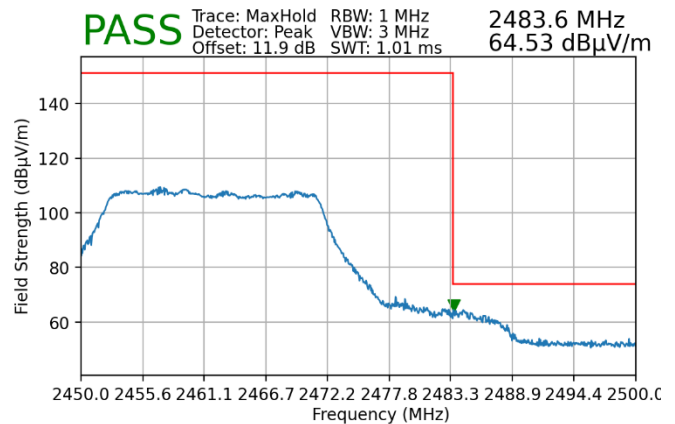


Plot 7-101. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 242 Tones)

FCC ID: A3LSMS948B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508250079-17-R1.A3L	Test Dates: 9/2/2025 - 10/14/2025	EUT Type: Portable Handset	Page 78 of 82

Worst Case Mode: 802.11ax/be OFDMA
Worst Case Transfer Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2467MHz
Channel: 12

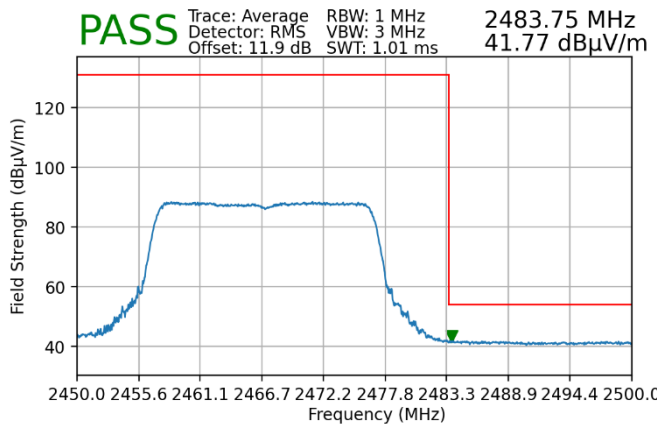


Plot 7-102. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 242 Tones)

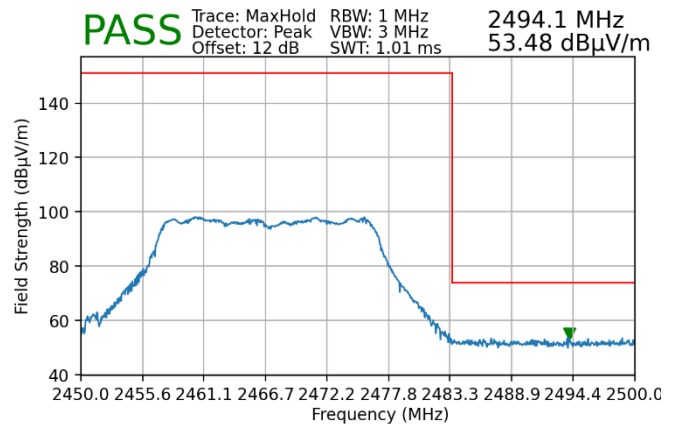


Plot 7-103. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 242 Tones)

Worst Case Mode: 802.11ax/be OFDMA
Worst Case Transfer Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 2472MHz
Channel: 13

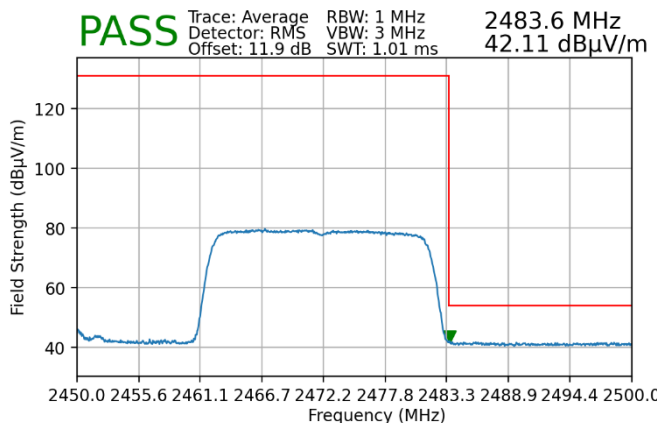

Plot 7-104. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 242 Tones)

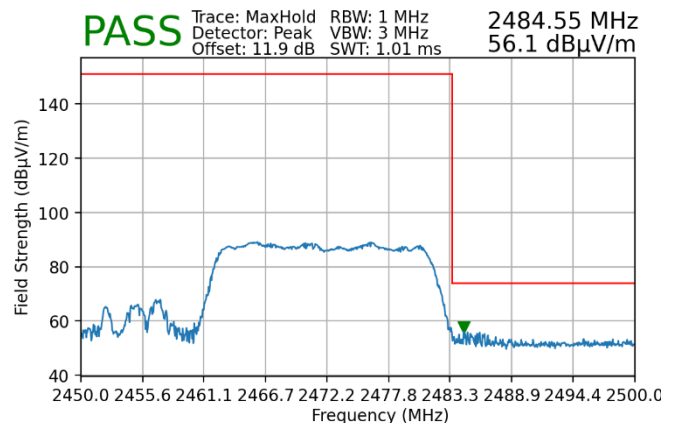

Plot 7-105. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 242 Tones)

FCC ID: A3LSMS948B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508250079-17-R1.A3L	Test Dates: 9/2/2025 - 10/14/2025	EUT Type: Portable Handset	Page 79 of 82

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMS948B** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules. The data referenced from **FCC ID: A3LSMS948U** (Model SM-S948U) included in this report have been reviewed and are deemed acceptable to support the compliance of **FCC ID: A3LSMS948B**.

FCC ID: A3LSMS948B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508250079-17-R1.A3L	Test Dates: 9/2/2025 - 10/14/2025	EUT Type: Portable Handset	Page 80 of 82

9.0 APPENDIX A – DATA REFERENCING RESULTS

Overview

The spot-check data presented in this section was measured on the variant model following the guidance of the FCC's Data Referencing guidance in KDB 484596 D01 v03. Each spot-check test on the EUT was performed using the same procedure and setting that were used to perform the test on the corresponding reference device. For the worst-case RSE data, the measurement is determined by an actual emission and not by noise floor.

All test cases were performed to verify the variant EUT is still in compliance with the spot-checked results to the reference device and was performed using the guidance of ANSI C63.10-2020.

Notes

- Each spot check test on the EUT was performed using the same procedure and setting that were used to perform the test on the corresponding reference device.

Conducted Spot-Checks – SM-S948B/DS

Freq [MHz]	Channel	Tones	RU Index	Conducted Power [dBm]			Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				Antenna-1	Antenna-2	MIMO						
2437	6	242T	61	AVG	AVG	AVG	30.00	-9.50	0.39	20.89	36.02	-15.13

Table 9-1. Conducted Output Power Measurements (Spot-check)

Radiated Spot-Checks – SM-S948B/DS

Worst Case Mode:	802.11ax/be
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2437MHz
Channel:	6


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	V	-	-	-79.71	7.22	0.00	34.51	53.98	-19.47

Table 9-2. RSE Measurements (Spot-check)

FCC ID: A3LSMS948B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508250079-17-R1.A3L	Test Dates: 9/2/2025 - 10/14/2025	EUT Type: Portable Handset	Page 81 of 82



Worst Case Mode: 802.1ax
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 1

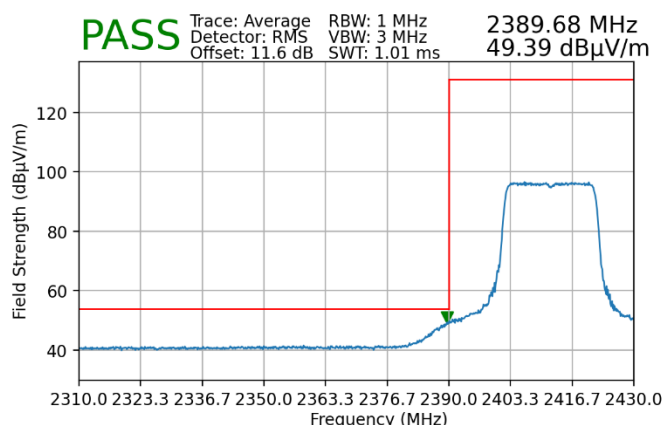

Plot 9-1. Radiated Restricted Lower Band Edge Measurement MIMO (Average)

Results

FCC Rules	Test Item	Test Case	Units	Limit	Reference Model: SM-S948U	Variant Model: SM-S948B	Deviation (dB)	Max Deviation (dB)	Pass/Fail
15.247(b)(3)	Conducted Output Power	802.11be MIMO 242 Tone Ch.6 - Average	dBm	N/A	20.65	20.5	-0.15	1	PASS
15.209	Radiated Spurious Emissions	802.11ax/be MIMO 26 Tone Ch.1 - 4824MHz - Average	dB μ V/m	53.98	33.56	34.51	0.95	3	PASS
15.209	Radiated Band Edge Emissions	802.11be MIMO 242 Tone Ch.1 - Average	dB μ V/m	53.98	51.41	49.39	-2.02	3	PASS

Table 9-3. Summary of Spot-checks

- END OF TEST REPORT -

FCC ID: A3LSMS948B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508250079-17-R1.A3L	Test Dates: 9/2/2025 - 10/14/2025	EUT Type: Portable Handset	Page 82 of 82