



Radiated Spurious Emission Measurements – Ant 1


§15.205 §15.209 §15.247(d)

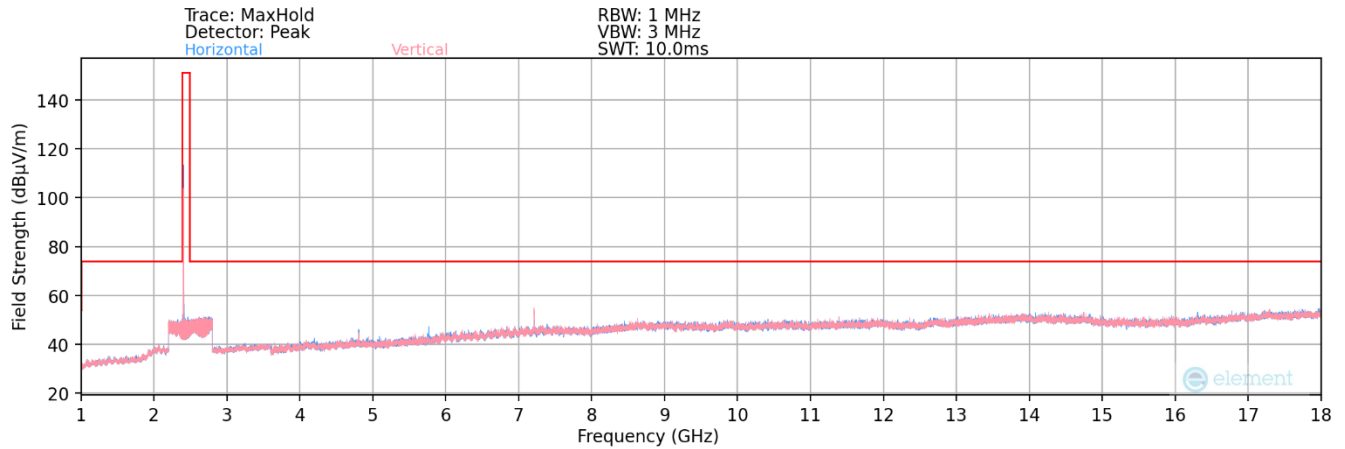

Plot 7-101. Radiated Spurious Plot above 1GHz (Bluetooth (LE) – Ch. 37) – Ant 1

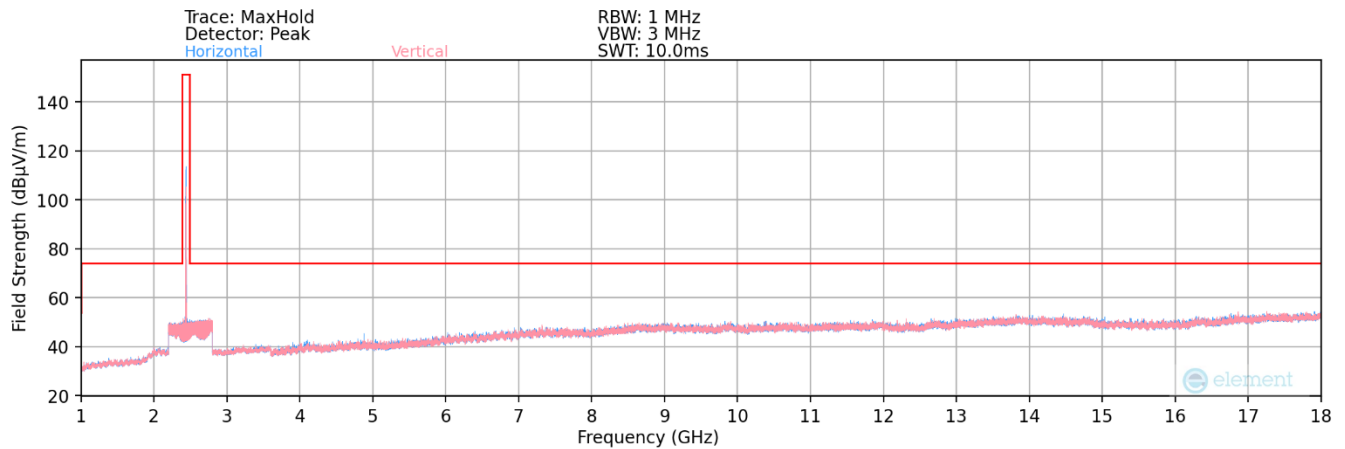


Plot 7-102. Radiated Spurious Plot above 1GHz (Bluetooth (LE) – Ch. 17) – Ant 1

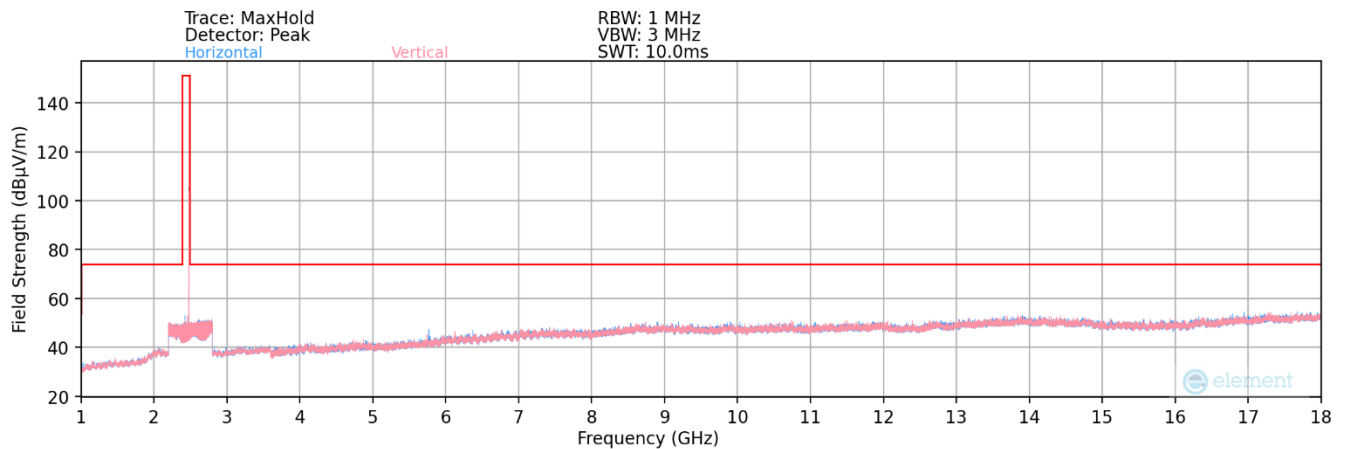

Plot 7-103. Radiated Spurious Plot above 1GHz (Bluetooth (LE) – Ch. 39) – Ant 1

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2508270082-09.A3L	Test Dates: 9/2/2025 - 10/16/2025	EUT Type: Portable Handset	Page 79 of 99

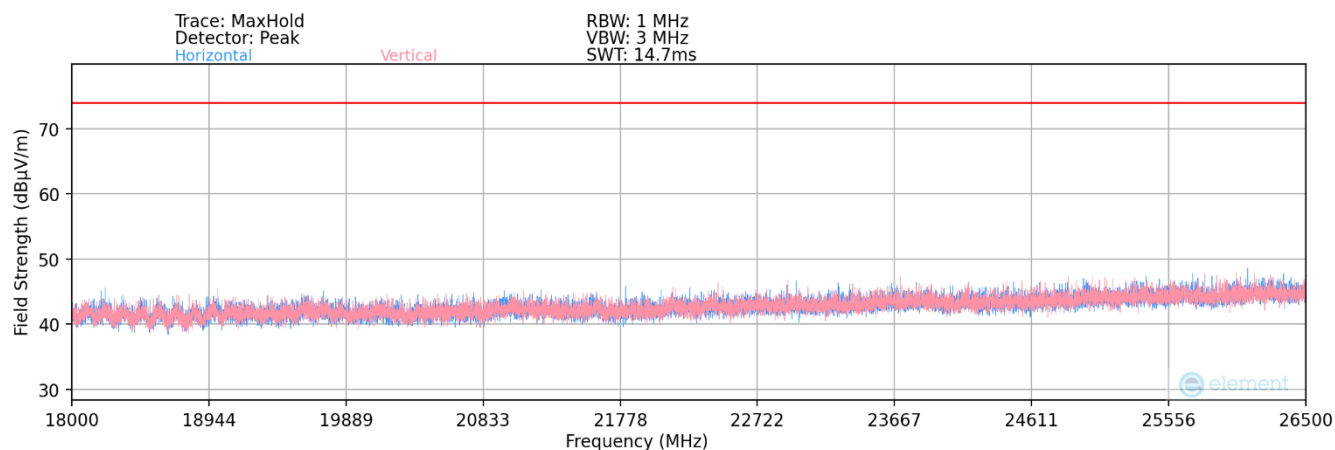

Plot 7-104. Radiated Spurious Plot above 18GHz (Bluetooth (LE) – Ch. 17) – Ant 1

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2508270082-09.A3L	Test Dates: 9/2/2025 - 10/16/2025	EUT Type: Portable Handset	Page 80 of 99



Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

Bluetooth Mode: LE
 Distance of Measurements: 3 Meters
 Operating Frequency: 2402MHz
 Channel: 37

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4804.00	Avg	V	166	240	-77.08	2.72	32.64	53.98	-21.34
4804.00	Peak	V	166	240	-64.85	2.72	44.87	73.98	-29.11
12010.00	Avg	V	-	-	-80.90	13.32	39.42	53.98	-14.56
12010.00	Peak	V	-	-	-68.75	13.32	51.57	73.98	-22.41

Table 7-10. Radiated Measurements @ 3 meters – Ant 1

Bluetooth Mode: LE
 Distance of Measurements: 3 Meters
 Operating Frequency: 2440MHz
 Channel: 17

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4880.00	Avg	V	173	240	-74.70	3.10	35.40	53.98	-18.58
4880.00	Peak	V	173	240	-62.33	3.10	47.77	73.98	-26.21
7320.00	Avg	V	-	-	-79.28	9.49	37.21	53.98	-16.77
7320.00	Peak	V	-	-	-67.48	9.49	49.01	73.98	-24.97
12200.00	Avg	V	-	-	-81.19	13.17	38.98	53.98	-15.00
12200.00	Peak	V	-	-	-69.22	13.17	50.95	73.98	-23.03

Table 7-11. Radiated Measurements @ 3 meters – Ant 1

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2508270082-09.A3L	Test Dates: 9/2/2025 - 10/16/2025	EUT Type: Portable Handset	Page 81 of 99

Bluetooth Mode: LE
Distance of Measurements: 3 Meters
Operating Frequency: 2480MHz
Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Avg	V	142	249	-77.79	3.05	32.26	53.98	-21.72
4960.00	Peak	V	142	249	-65.71	3.05	44.34	73.98	-29.64
7440.00	Avg	V	-	-	-79.79	9.19	36.40	53.98	-17.58
7440.00	Peak	V	-	-	-67.25	9.19	48.94	73.98	-25.04
12400.00	Avg	V	-	-	-81.06	13.27	39.21	53.98	-14.77
12400.00	Peak	V	-	-	-68.52	13.27	51.75	73.98	-22.23

Table 7-12. Radiated Measurements @ 3 meters – Ant 1

Bluetooth Mode: LE
Distance of Measurements: 3 Meters
Operating Frequency: 2440MHz
Channel: 17

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4880.00	Avg	V	389	369	-74.88	3.10	35.22	53.98	-18.76
4880.00	Peak	V	389	369	-62.64	3.10	47.46	73.98	-26.52
7320.00	Avg	V	-	-	-79.30	9.49	37.19	53.98	-16.79
7320.00	Peak	V	-	-	-67.04	9.49	49.45	73.98	-24.53
12200.00	Avg	V	-	-	-81.21	13.17	38.96	53.98	-15.02
12200.00	Peak	V	-	-	-68.62	13.17	51.55	73.98	-22.43


Table 7-13. Radiated Measurements @ 3 meters – Ant 1 – with WCP

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2508270082-09.A3L	Test Dates: 9/2/2025 - 10/16/2025	EUT Type: Portable Handset	Page 82 of 99




Radiated Spurious Emission Measurements – Ant 2


§15.205 §15.209 §15.247(d)

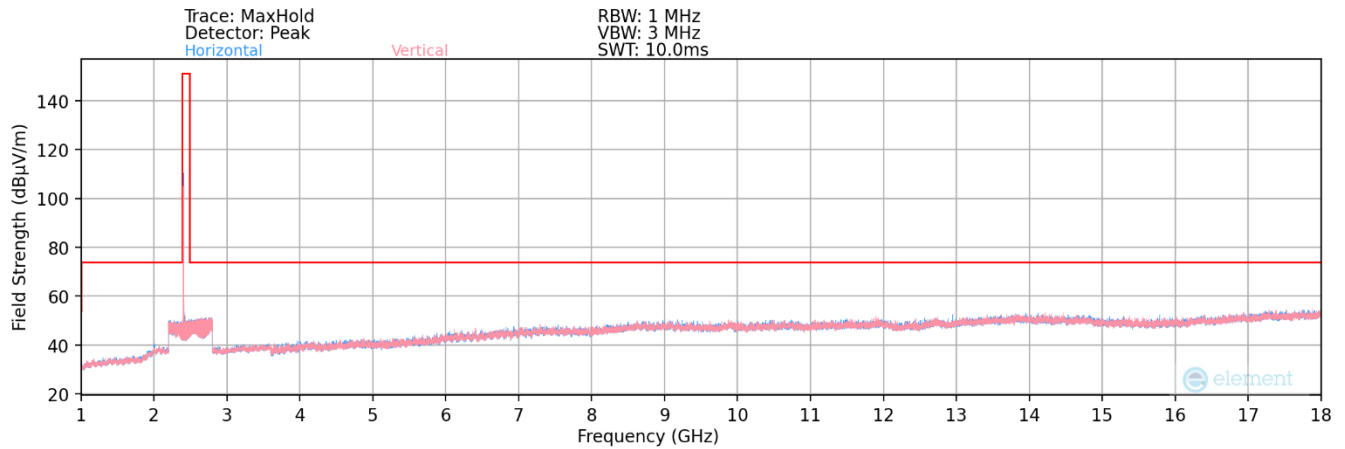

Plot 7-105. Radiated Spurious Plot above 1GHz (Bluetooth (LE) – Ch. 0) – Ant 2

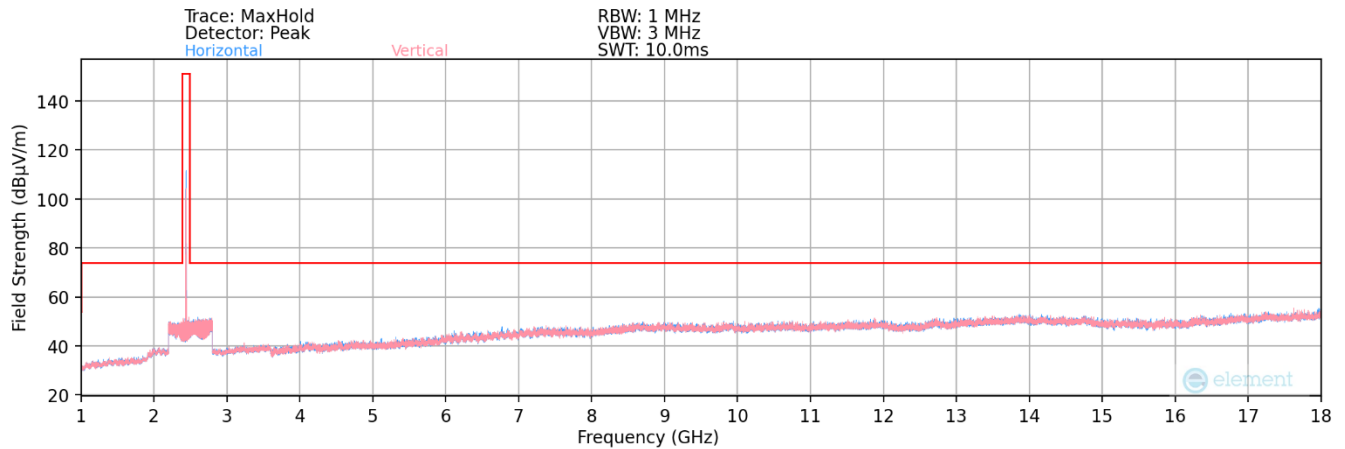


Plot 7-106. Radiated Spurious Plot above 1GHz (Bluetooth (LE) – Ch. 17) – Ant 2

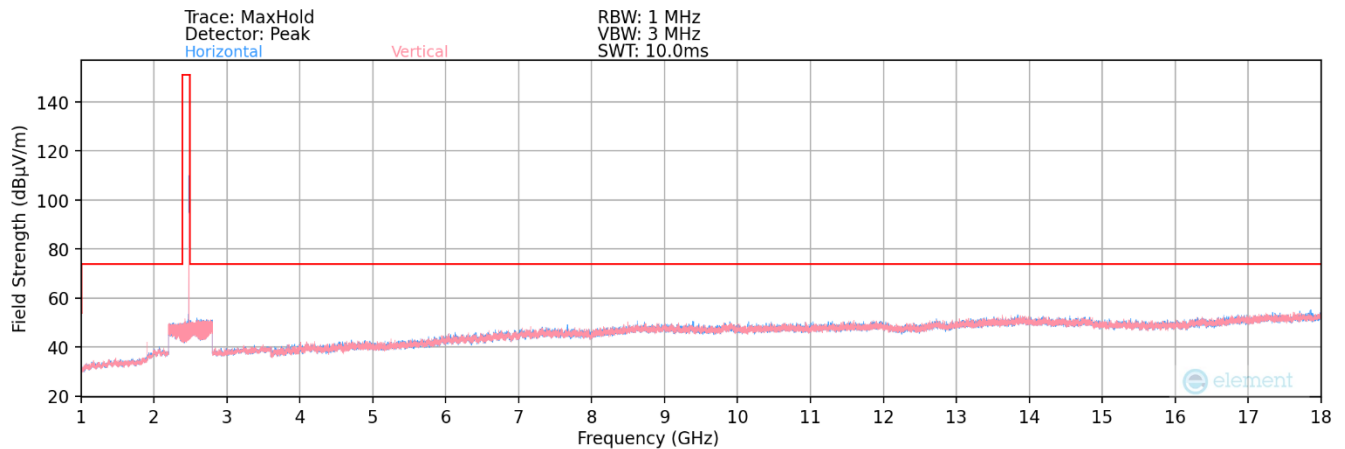

Plot 7-107. Radiated Spurious Plot above 1GHz (Bluetooth (LE) – Ch. 36) – Ant 2

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2508270082-09.A3L	Test Dates: 9/2/2025 - 10/16/2025	EUT Type: Portable Handset	Page 83 of 99

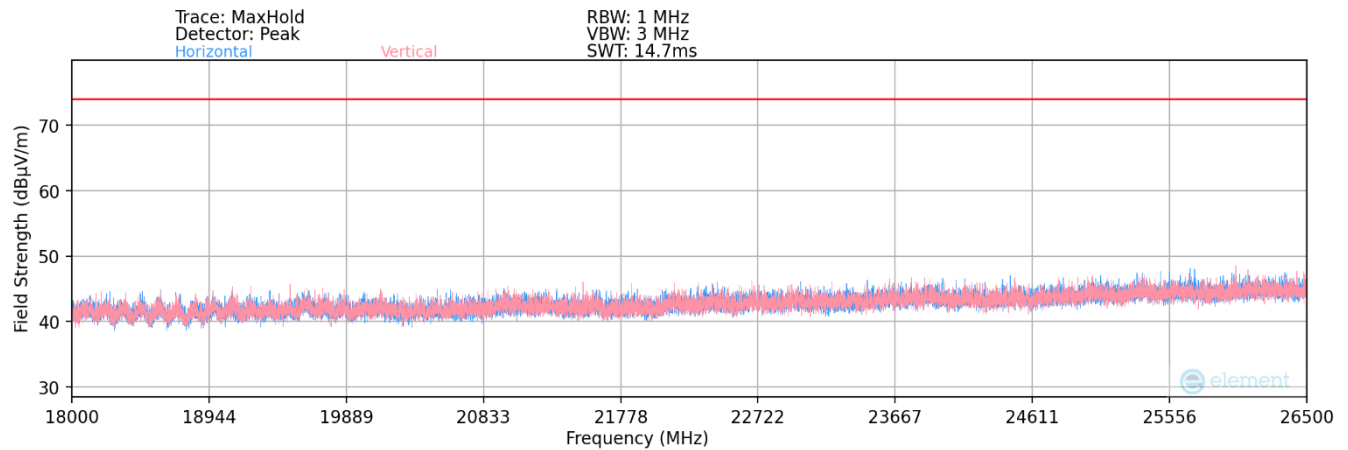

Plot 7-108. Radiated Spurious Plot above 18GHz (Bluetooth (LE) – Ch. 17) – Ant 2

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2508270082-09.A3L	Test Dates: 9/2/2025 - 10/16/2025	EUT Type: Portable Handset	Page 84 of 99

Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

Bluetooth Mode: LE
Distance of Measurements: 3 Meters
Operating Frequency: 2404MHz
Channel: 0

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4804.00	Avg	H	-	-	-78.24	2.72	31.48	53.98	-22.50
4804.00	Peak	H	-	-	-65.48	2.72	44.24	73.98	-29.74
12010.00	Avg	H	-	-	-80.87	13.32	39.45	53.98	-14.53
12010.00	Peak	H	-	-	-68.77	13.32	51.55	73.98	-22.43

Table 7-14. Radiated Measurements @ 3 meters – Ant 2

Bluetooth Mode: LE
Distance of Measurements: 3 Meters
Operating Frequency: 2440MHz
Channel: 17

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4880.00	Avg	H	-	-	-78.67	3.10	31.43	53.98	-22.55
4880.00	Peak	H	-	-	-66.78	3.10	43.32	73.98	-30.66
7320.00	Avg	H	-	-	-79.44	9.49	37.05	53.98	-16.93
7320.00	Peak	H	-	-	-66.55	9.49	49.94	73.98	-24.04
12200.00	Avg	H	-	-	-81.18	13.17	38.99	53.98	-14.99
12200.00	Peak	H	-	-	-68.78	13.17	51.39	73.98	-22.59

Table 7-15. Radiated Measurements @ 3 meters – Ant 2

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2508270082-09.A3L	Test Dates: 9/2/2025 - 10/16/2025	EUT Type: Portable Handset	Page 85 of 99

Bluetooth Mode: LE
Distance of Measurements: 3 Meters
Operating Frequency: 2478MHz
Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Avg	H	-	-	-78.49	3.05	31.56	53.98	-22.42
4960.00	Peak	H	-	-	-66.04	3.05	44.01	73.98	-29.97
7440.00	Avg	H	-	-	-79.86	9.19	36.33	53.98	-17.65
7440.00	Peak	H	-	-	-67.53	9.19	48.66	73.98	-25.32
12400.00	Avg	H	-	-	-81.07	13.27	39.20	53.98	-14.78
12400.00	Peak	H	-	-	-69.28	13.27	50.99	73.98	-22.99

Table 7-16. Radiated Measurements @ 3 meters – Ant 2

Bluetooth Mode: LE
Distance of Measurements: 3 Meters
Operating Frequency: 2440MHz
Channel: 17

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4880.00	Avg	H	-	-	-78.67	3.10	31.43	53.98	-22.55
4880.00	Peak	H	-	-	-66.86	3.10	43.24	73.98	-30.74
7320.00	Avg	H	-	-	-79.44	9.49	37.05	53.98	-16.93
7320.00	Peak	H	-	-	-67.68	9.49	48.81	73.98	-25.17
12200.00	Avg	H	-	-	-81.19	13.17	38.98	53.98	-15.00
12200.00	Peak	H	-	-	-69.24	13.17	50.93	73.98	-23.05

Table 7-17. Radiated Measurements @ 3 meters – Ant 2 – with WCP

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2508270082-09.A3L	Test Dates: 9/2/2025 - 10/16/2025	EUT Type: Portable Handset	Page 86 of 99



Radiated Restricted Band Edge Measurements


§15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.


The amplitude offset shown in the following plots for average measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain


Bluetooth Mode:	LE
Measurement Distance:	3 Meters
Operating Frequency:	2478MHz
Channel:	36

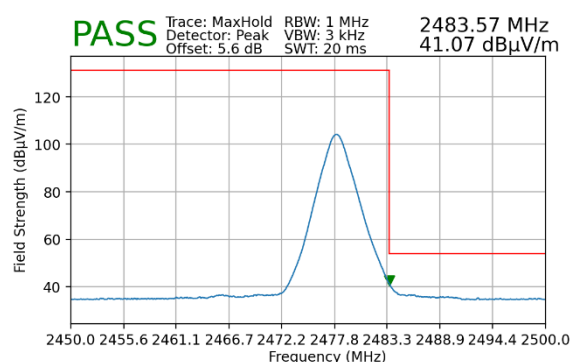


Plot 7-109. Radiated Restricted Upper Band Edge Measurement (Average) – Ant 1

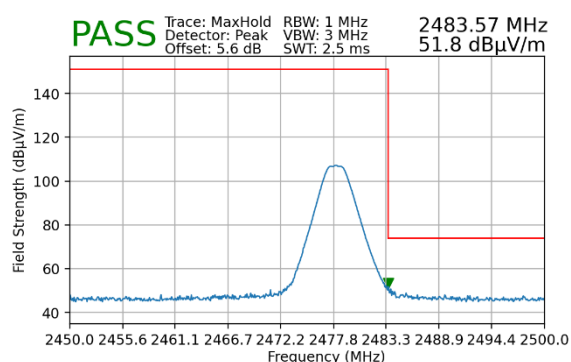

Plot 7-110. Radiated Restricted Upper Band Edge Measurement (Peak) – Ant 1

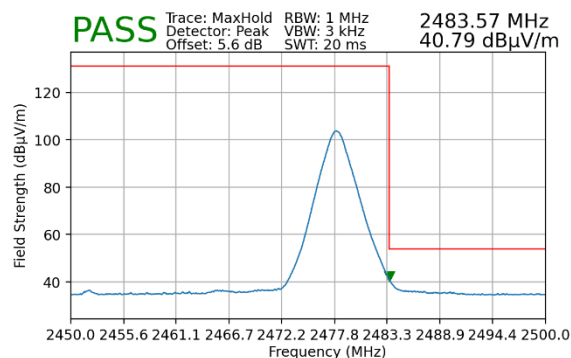

Plot 7-111. Radiated Restricted Upper Band Edge Measurement (Average) – Ant 1 - WCP

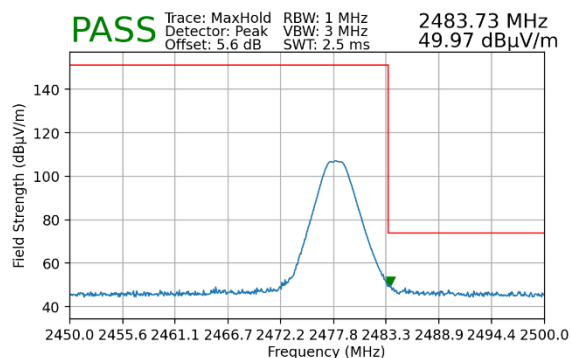


Plot 7-112. Radiated Restricted Upper Band Edge Measurement (Peak) – Ant 1 - WCP


FCC ID: A3LSMS948JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2508270082-09.A3L	Test Dates: 9/2/2025 - 10/16/2025	EUT Type: Portable Handset	Page 87 of 99




Bluetooth Mode:	LE
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	39

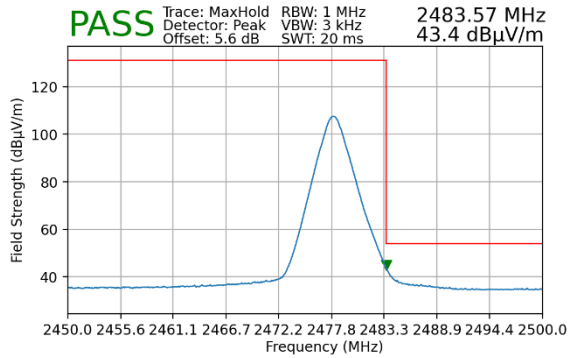


Plot 7-113. Radiated Restricted Upper Band Edge Measurement (Average) – Ant 2

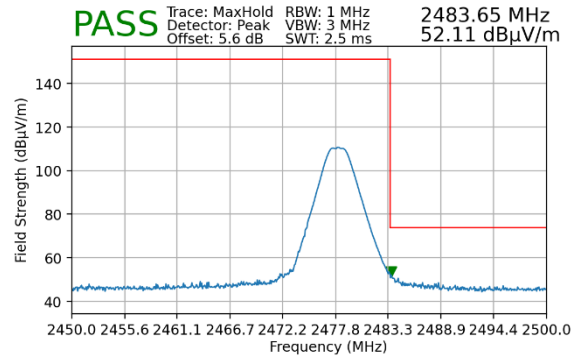

Plot 7-114. Radiated Restricted Upper Band Edge Measurement (Peak) – Ant 2

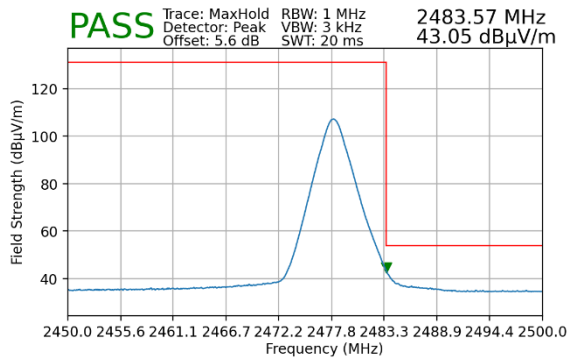

Plot 7-115. Radiated Restricted Upper Band Edge Measurement (Average) – Ant 2 - WCP

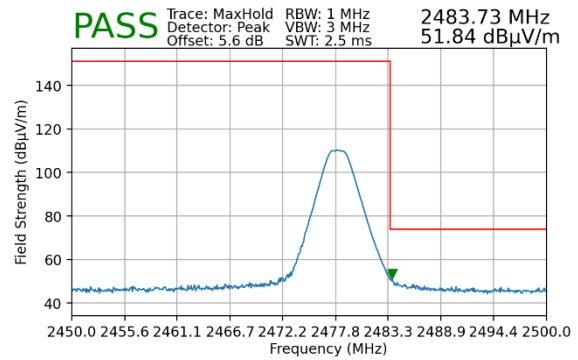

Plot 7-116. Radiated Restricted Upper Band Edge Measurement (Peak) – Ant 2 - WCP

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2508270082-09.A3L	Test Dates: 9/2/2025 - 10/16/2025	EUT Type: Portable Handset	Page 88 of 99

7.8 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst-case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-18 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-18. Radiated Limits

Test Procedures Used

ANSI C63.10:2020

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2508270082-09.A3L	Test Dates: 9/2/2025 - 10/16/2025	EUT Type: Portable Handset	Page 89 of 99

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

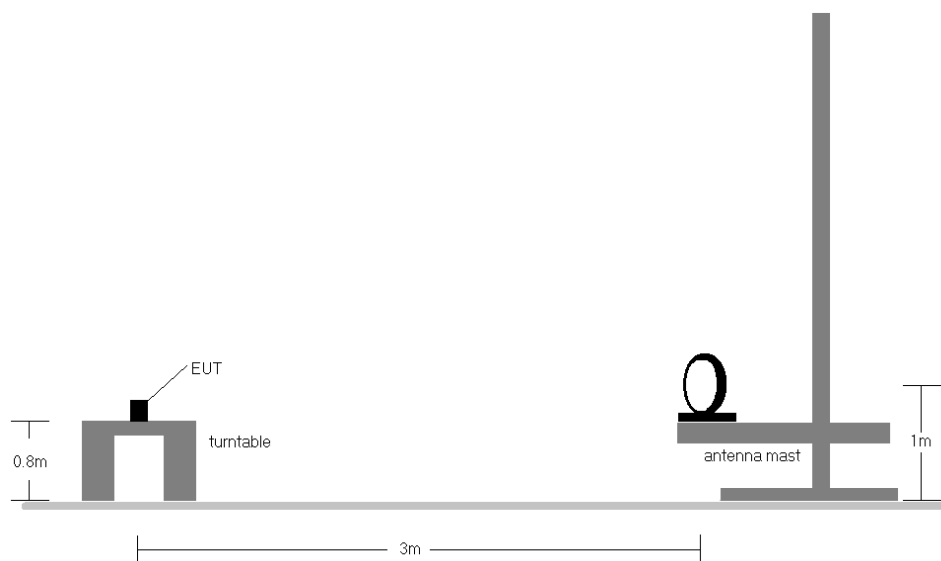


Figure 7-7. Radiated Test Setup < 30Mhz

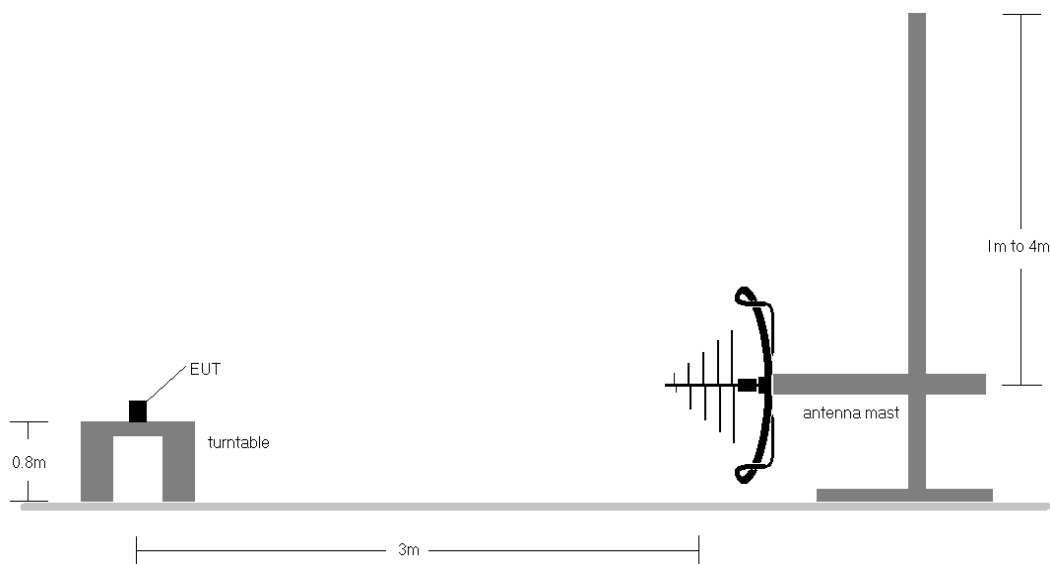


Figure 7-8. Radiated Test Setup < 1GHz

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2508270082-09.A3L	Test Dates: 9/2/2025 - 10/16/2025	EUT Type: Portable Handset	Page 90 of 99


Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen(8.10) are below the limit shown in Table 7-18.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2508270082-09.A3L	Test Dates: 9/2/2025 - 10/16/2025	EUT Type: Portable Handset	Page 91 of 99

Radiated Spurious Emissions Measurements (Below 1GHz)


§15.209; RSS-Gen [8.9]

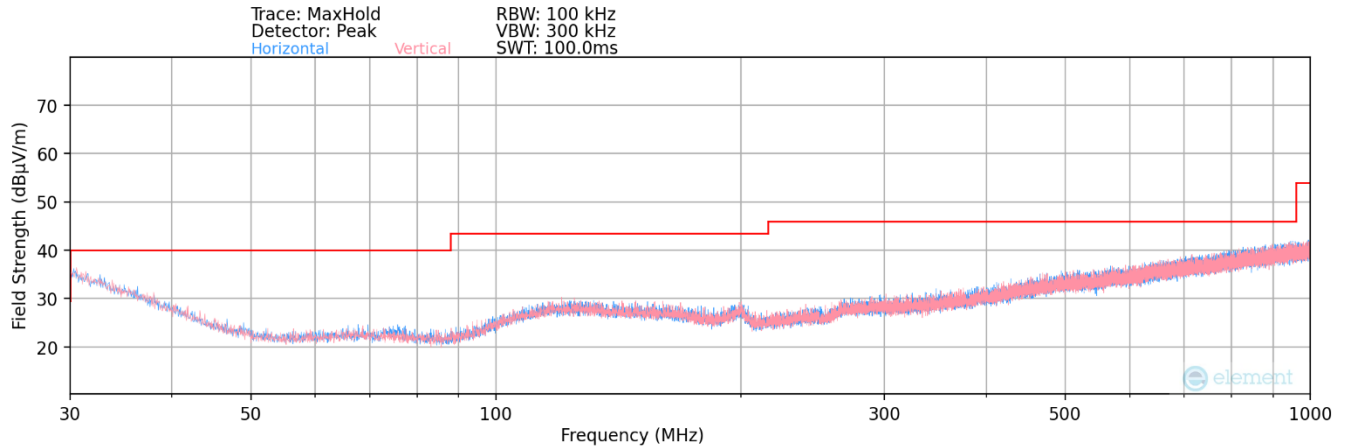

Plot 7-117. Radiated Spurious Plot below 1GHz – Ant 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
350.00	Quasi-Peak	V	-	-	-108.77	22.08	20.31	46.02	-25.71

Table 7-19. Radiated Spurious Emissions Below 1GHz – Ant 1

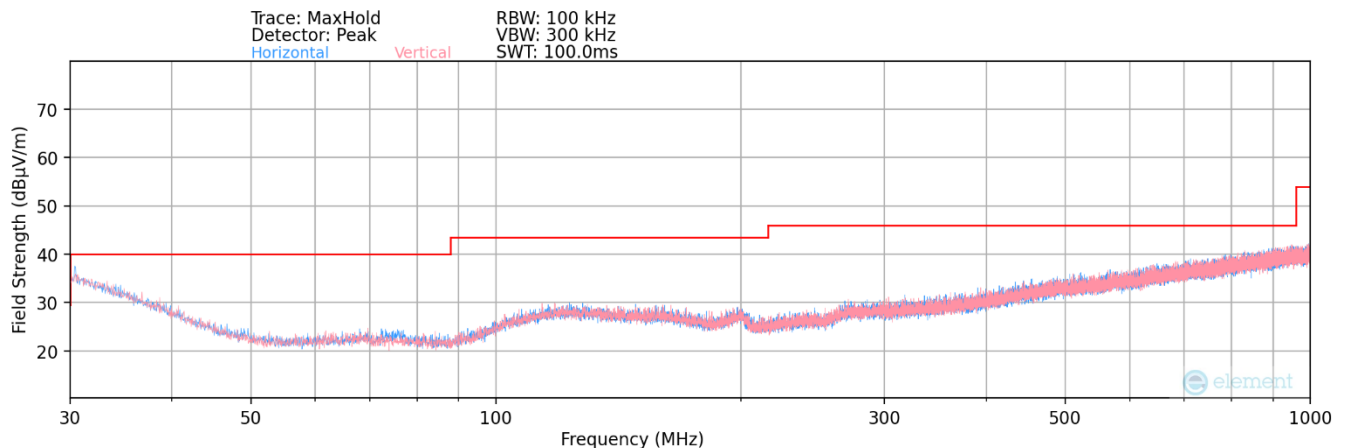

Plot 7-118. Radiated Spurious Plot below 1GHz – Ant 2

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
143.00	Quasi-Peak	H	-	-	-108.73	19.69	17.96	43.52	-25.57

Table 7-20. Radiated Spurious Emissions Below 1GHz – Ant 2

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT (CERTIFICATION)				Approved by: Technical Manager	
Test Report S/N: 1M2508270082-09.A3L	Test Dates: 9/2/2025 - 10/16/2025	EUT Type: Portable Handset			Page 92 of 99	

7.9 Line-Conducted Test Data

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-21. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10:2020, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2508270082-09.A3L	Test Dates: 9/2/2025 - 10/16/2025	EUT Type: Portable Handset	Page 93 of 99

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


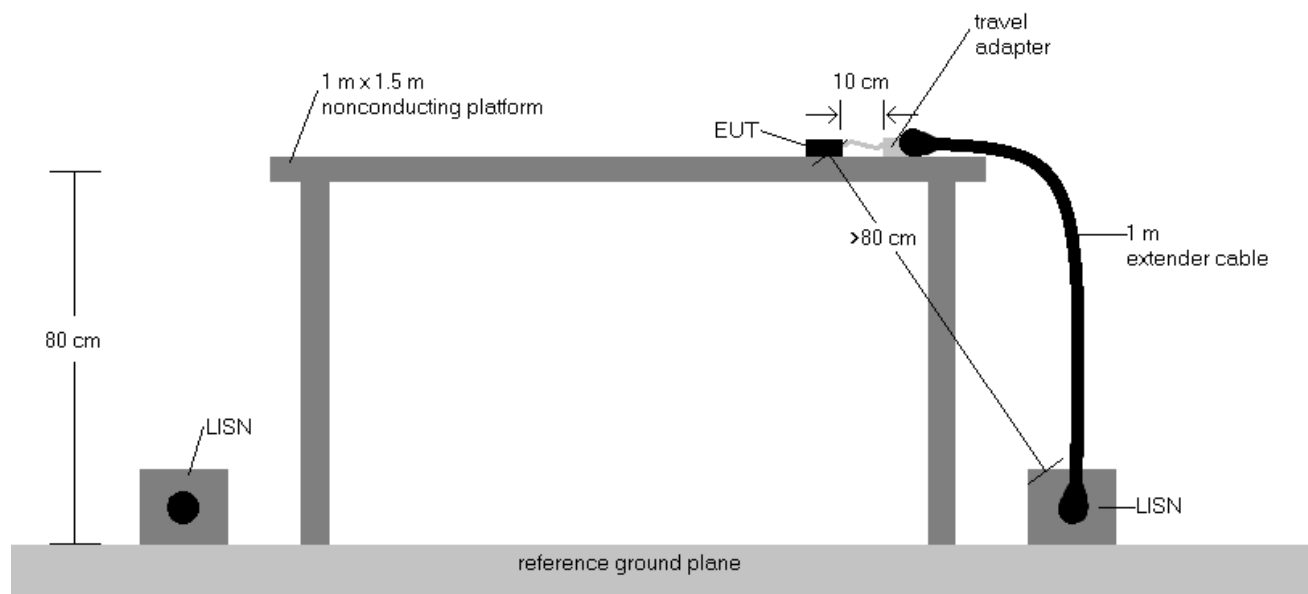


Figure 7-9. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen (8.8).
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2508270082-09.A3L	Test Dates: 9/2/2025 - 10/16/2025	EUT Type: Portable Handset	Page 94 of 99

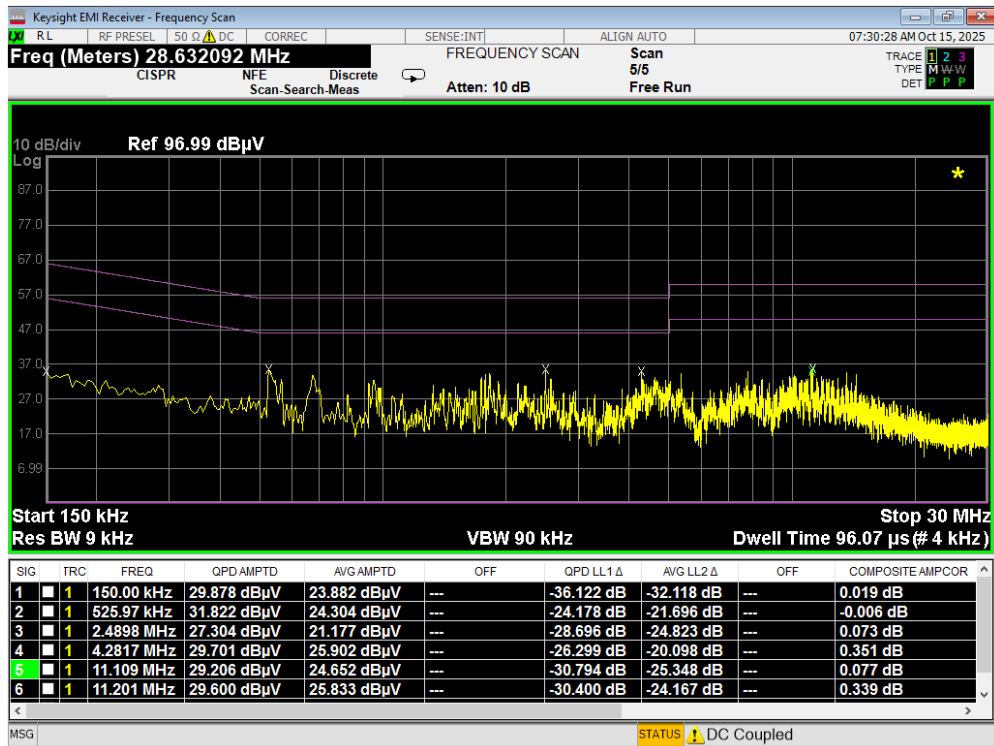


Plot 7-119. Line Conducted Plot with Bluetooth LE (L1)

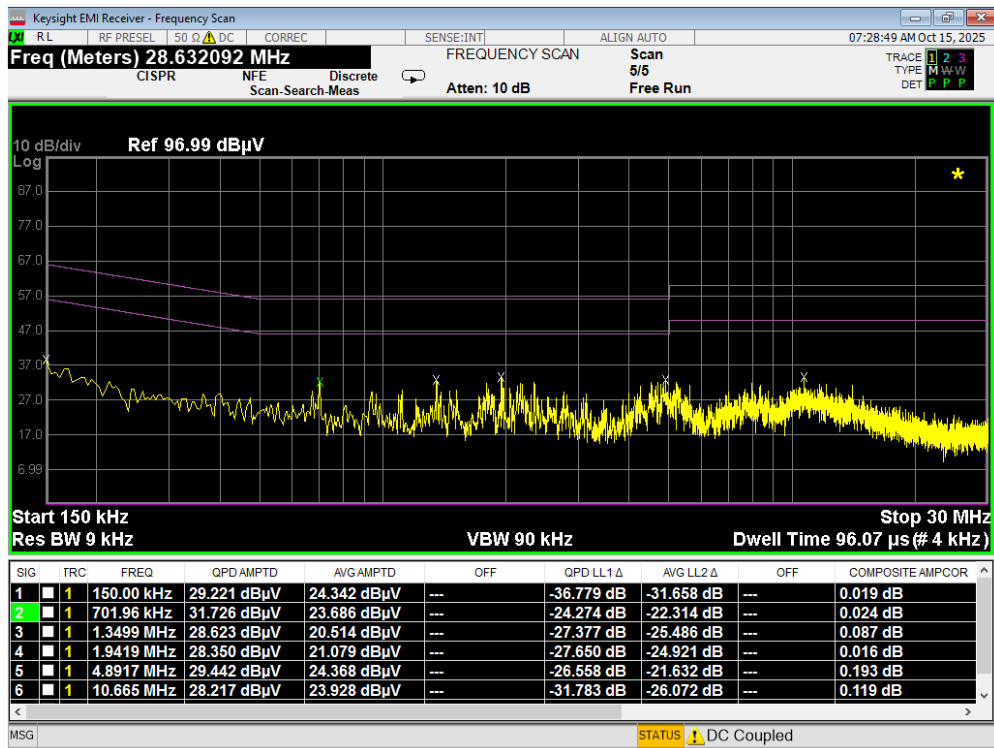


Plot 7-120. Line Conducted Plot with Bluetooth LE (N)

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2508270082-09.A3L	Test Dates: 9/2/2025 - 10/16/2025	EUT Type: Portable Handset	Page 95 of 99

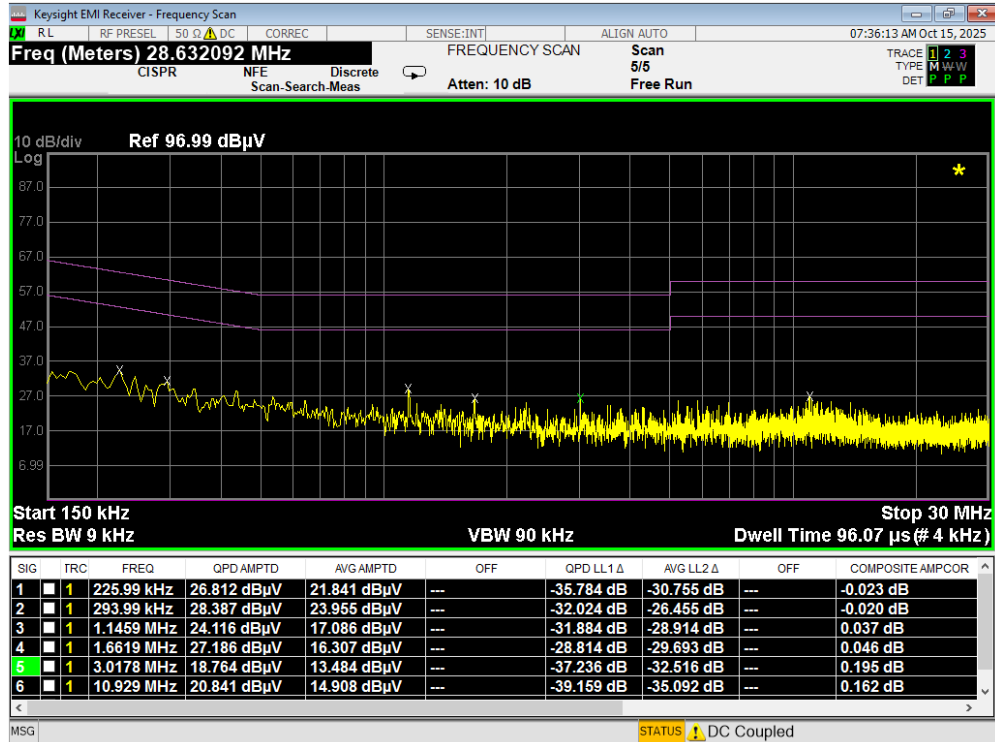

Plot 7-121. Line Conducted Plot with Bluetooth LE (L1) - WCP

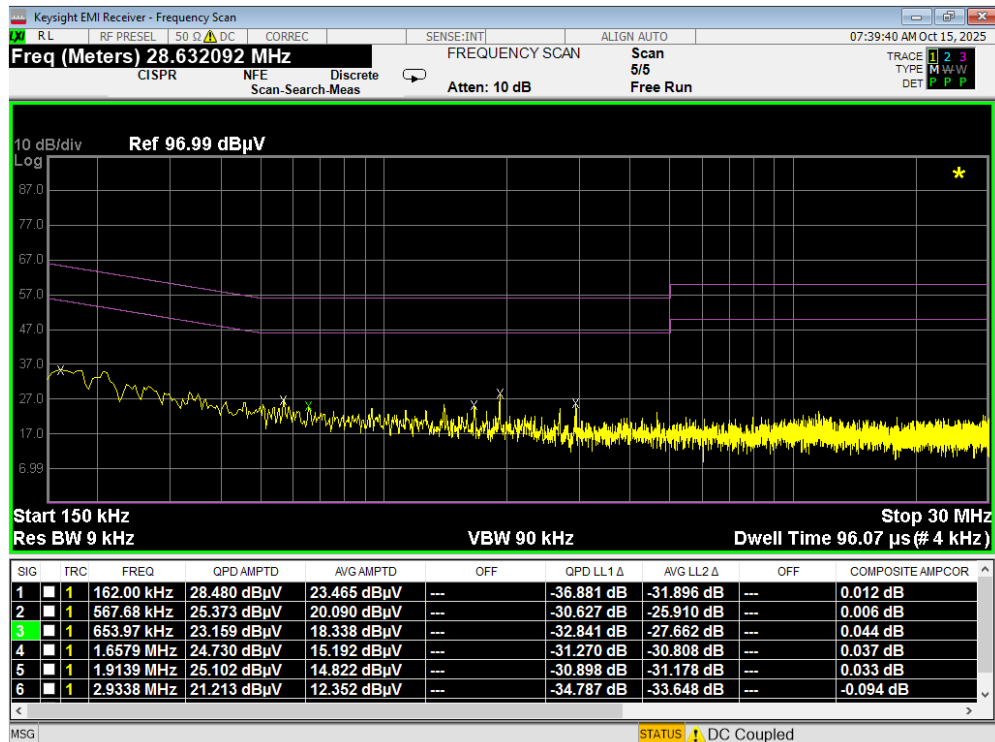

Plot 7-122. Line Conducted Plot with Bluetooth LE (N) - WCP

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2508270082-09.A3L	Test Dates: 9/2/2025 - 10/16/2025	EUT Type: Portable Handset	Page 96 of 99

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMS948JPN** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules. The data referenced from **FCC ID: A3LSMS948U** (Model SM-S948U) included in this report have been reviewed and are deemed acceptable to support the compliance of **FCC ID: A3LSMS948JPN**.

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2508270082-09.A3L	Test Dates: 9/2/2025 - 10/16/2025	EUT Type: Portable Handset	Page 97 of 99

9.0 APPENDIX A – DATA REFERENCING SPOT-CHECKS

The spot-check data presented in this section was measured on the variant model following the guidance of the FCC's Data Referencing guidance in KDB 484596 D01 v03. Each spot-check test on the EUT was performed using the same procedure and setting that were used to perform the test on the corresponding reference device. For the worst-case RSE data, the measurement is determined by an actual emission and not by noise floor.

All test cases were performed to verify the variant EUT is still in compliance with the spot-checked results to the reference device and was performed using the guidance of ANSI C63.10-2020.

Notes


- Each spot check test on the EUT was performed using the same procedure and setting that were used to perform the test on the corresponding reference device.

Radiated Spot-Checks – SC-53G

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4880.00	Avg	V	112	7	-70.81	9.75	45.94	53.98	-8.04

Table 9-1. RSE Measurements (Spot-check)

Bluetooth Mode:	LE
Measurement Distance:	3 Meters
Operating Frequency:	2478MHz
Channel:	36

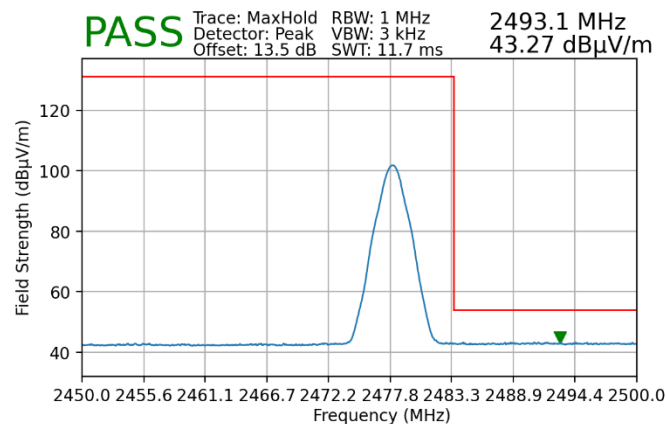

Plot 9-1. Radiated Restricted Upper Band Edge Measurement (Average) – Ant 1

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2508270082-09.A3L	Test Dates: 9/2/2025 - 10/16/2025	EUT Type: Portable Handset	Page 98 of 99

FCC Rules	Test Item	Test Case	Units	Limit	Reference Model: SM-S948U	Variant Model: SM- S948D	Deviation (dB)	Max Deviation (dB)	Pass/Fail
15.209	Radiated Spurious Emissions	Ch.39 - Average - 4882MHz	dBuV/m	53.98	15.18	12.19	-2.99	3	PASS
15.209	Radiated Band Edge Emissions	Ch.78 - Average	dBuV/m	53.98	21.26	21.03	-0.23	3	PASS

Table 9-2. Summary of Spot-checks

- END OF TEST REPORT -

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2508270082-09.A3L	Test Dates: 9/2/2025 - 10/16/2025	EUT Type: Portable Handset	Page 99 of 99