

MIMO Radiated Spurious Emission Measurements – UNII Band 5

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 1 & 3 Meters

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11a	MIMO	5	2	5935	*	11870.00	Average	V	-	-	-78.21	9.41	0.00	38.20	53.98	-15.78
					*	11870.00	Peak	V	-	-	-66.17	9.41	0.00	50.24	73.98	-23.74
					*	17805.00	Average	V	-	-	-77.80	16.76	0.00	45.96	53.98	-8.02
					*	17805.00	Peak	V	-	-	-66.14	16.76	0.00	57.62	73.98	-16.36
					*	23740.00	Average	V	-	-	-63.20	4.02	-9.54	38.28	53.98	-15.70
					*	23740.00	Peak	V	-	-	-51.18	4.02	-9.54	50.30	73.98	-23.68
			45	6175		29675.00	Peak	V	-	-	-52.47	5.01	-9.54	50.00	68.20	-18.20
					*	12350.00	Average	V	-	-	-78.68	9.78	0.00	38.10	53.98	-15.88
					*	12350.00	Peak	V	-	-	-67.17	9.78	0.00	49.61	73.98	-24.37
					*	18525.00	Average	V	-	-	-63.11	1.00	-9.54	35.35	53.98	-18.63
					*	18525.00	Peak	V	-	-	-50.70	1.00	-9.54	47.76	73.98	-26.22
						24700.00	Peak	V	-	-	-50.63	4.23	-9.54	51.06	68.20	-17.14
			93	6415		30875.00	Peak	V	-	-	-51.77	5.66	-9.54	51.35	68.20	-16.85
						12830.00	Peak	V	-	-	-65.58	10.40	0.00	51.82	68.20	-16.38
					*	19245.00	Average	V	-	-	-61.37	1.74	-9.54	37.83	53.98	-16.15
					*	19245.00	Peak	V	-	-	-50.29	1.74	-9.54	48.91	73.98	-25.07
						25660.00	Peak	V	-	-	-51.31	4.69	-9.54	50.84	68.20	-17.36
						32075.00	Peak	V	-	-	-51.98	6.47	-9.54	51.95	68.20	-16.25

Table 7-29. Radiated Measurements MIMO – VLP

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11a	ANT1	5	45	6175	150.00	Quasi-Peak	V	-	-	-91.02	19.70	0.00	35.68	43.52	-7.84
					250.00	Quasi-Peak	V	-	-	-90.60	18.76	0.00	36.23	46.02	-9.79
					450.00	Quasi-Peak	V	-	-	-89.81	24.62	0.00	36.79	46.02	-9.23

Table 7-30. Radiated Measurements MIMO below 1GHz

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11a	MIMO	5	45	6175	*	12350.00	Average	V	-	-	-79.01	9.78	0.00	37.77	53.98	-16.21
					*	12350.00	Peak	V	-	-	-67.13	9.78	0.00	49.65	73.98	-24.33
					*	18525.00	Average	V	-	-	-65.23	1.00	0.00	42.77	53.98	-11.21
					*	18525.00	Peak	V	-	-	-56.42	1.00	-9.54	42.04	73.98	-31.94
						24700.00	Peak	V	-	-	-55.17	4.23	-9.54	46.52	68.20	-21.68
						30875.00	Peak	V	-	-	-55.31	5.66	-9.54	47.81	68.20	-20.39

Table 7-31. Radiated Measurements MIMO – with WCP

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1M2508270082-18.A3L	Test Dates: 9/2/2025 - 11/18/2025	EUT Type: Portable Handset		Page 91 of 119

MIMO Radiated Spurious Emission Measurements – UNII Band 6

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 1 & 3 Meters

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11a	MIMO	6	97	6435		12870.00	Peak	V	-	-	-67.01	10.56	0.00	50.55	68.20	-17.65
					*	19305.00	Average	V	-	-	-62.27	1.65	-9.54	36.84	53.98	-17.14
					*	19305.00	Peak	V	-	-	-50.29	1.65	-9.54	48.82	73.98	-25.16
						25740.00	Peak	V	-	-	-51.17	4.71	-9.54	51.00	68.20	-17.20
						32175.00	Peak	V	-	-	-52.24	6.76	-9.54	51.98	68.20	-16.22
			105	6475		12950.00	Peak	V	-	-	-66.40	10.59	0.00	51.19	68.20	-17.01
					*	19425.00	Average	V	-	-	-62.46	1.76	-9.54	36.76	53.98	-17.22
					*	19425.00	Peak	V	-	-	-50.46	1.76	-9.54	48.76	73.98	-25.22
						25900.00	Peak	V	-	-	-51.34	4.78	-9.54	50.90	68.20	-17.30
						32375.00	Peak	V	-	-	-51.93	6.56	-9.54	52.09	68.20	-16.11
			113	6515		13030.00	Peak	V	-	-	-66.27	10.85	0.00	51.58	68.20	-16.62
					*	19545.00	Average	V	-	-	-62.85	1.89	-9.54	36.50	53.98	-17.48
					*	19545.00	Peak	V	-	-	-50.81	1.89	-9.54	48.54	73.98	-25.44
						26060.00	Peak	V	-	-	-51.22	4.92	-9.54	51.16	68.20	-17.04
						32575.00	Peak	V	-	-	-52.15	6.76	-9.54	52.07	68.20	-16.13

Table 7-32. Radiated Measurements MIMO – VLP

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508270082-18.A3L	Test Dates: 9/2/2025 - 11/18/2025	EUT Type: Portable Handset	Page 92 of 119

MIMO Radiated Spurious Emission Measurements – UNII Band 7

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 1 & 3 Meters

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11a	MIMO	7	117	6535		13070.00	Peak	V	-	-	-66.26	10.74	0.00	51.48	68.20	-16.72
					*	19605.00	Average	V	-	-	-62.29	2.20	-9.54	37.37	53.98	-16.61
					*	19605.00	Peak	V	-	-	-49.56	2.20	-9.54	50.10	73.98	-23.88
						26140.00	Peak	V	-	-	-51.36	4.98	-9.54	51.08	68.20	-17.12
						32675.00	Peak	V	-	-	-52.29	7.14	-9.54	52.31	68.20	-15.89
			149	6695	*	13390.00	Average	V	-	-	-78.36	11.04	0.00	39.68	53.98	-14.30
					*	13390.00	Peak	V	-	-	-65.90	11.04	0.00	52.14	73.98	-21.84
					*	20085.00	Average	V	-	-	-62.24	2.07	-9.54	37.29	53.98	-16.69
					*	20085.00	Peak	V	-	-	-50.67	2.07	-9.54	48.86	73.98	-25.12
						26780.00	Peak	V	-	-	-50.89	5.18	-9.54	51.75	68.20	-16.45
			185	6875		33475.00	Peak	V	-	-	-51.96	8.48	-9.54	53.98	68.20	-14.22
						13750.00	Peak	V	-	-	-65.65	11.51	0.00	52.86	68.20	-15.34
					*	20625.00	Average	V	-	-	-63.21	2.36	-9.54	36.61	53.98	-17.37
					*	20625.00	Peak	V	-	-	-51.05	2.36	-9.54	48.77	73.98	-25.21
						27500.00	Peak	V	-	-	-50.60	5.00	-9.54	51.86	68.20	-16.34
						34375.00	Peak	V	-	-	-52.61	9.46	-9.54	54.31	68.20	-13.89

Table 7-33. Radiated Measurements MIMO – VLP

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508270082-18.A3L	Test Dates: 9/2/2025 - 11/18/2025	EUT Type: Portable Handset	Page 93 of 119

MIMO Radiated Spurious Emission Measurements – UNII Band 8

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 1 & 3 Meters


Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11a	MIMO	8	189	6895		13790.00	Peak	V	-	-	-66.42	11.38	0.00	51.96	68.20	-16.24
					*	20685.00	Average	V	-	-	-63.52	2.33	-9.54	36.27	53.98	-17.71
					*	20685.00	Peak	V	-	-	-51.67	2.33	-9.54	48.12	73.98	-25.86
						27580.00	Peak	V	-	-	-51.58	5.33	-9.54	51.21	68.20	-16.99
						34475.00	Peak	V	-	-	-52.89	9.33	-9.54	53.90	68.20	-14.30
			209	6995		13990.00	Peak	V	-	-	-65.83	11.63	0.00	52.80	68.20	-15.40
					*	20985.00	Average	V	-	-	-63.72	2.83	-9.54	36.57	53.98	-17.41
					*	20985.00	Peak	V	-	-	-51.95	2.83	-9.54	48.34	73.98	-25.64
						27980.00	Peak	V	-	-	-51.66	5.30	-9.54	51.10	68.20	-17.10
						34975.00	Peak	V	-	-	-53.40	9.79	-9.54	53.85	68.20	-14.35
			233	7115		14230.00	Peak	V	-	-	-65.97	12.35	0.00	53.38	68.20	-14.82
					*	21345.00	Average	V	-	-	-63.08	2.85	-9.54	37.23	53.98	-16.75
					*	21345.00	Peak	V	-	-	-51.15	2.85	-9.54	49.16	73.98	-24.82
						28460.00	Peak	V	-	-	-52.01	5.34	-9.54	50.79	68.20	-17.41
						35575.00	Peak	V	-	-	-52.11	9.53	-9.54	54.88	68.20	-13.32

Table 7-34. Radiated Measurements MIMO – VLP


FCC ID: A3LSMS948JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508270082-18.A3L	Test Dates: 9/2/2025 - 11/18/2025	EUT Type: Portable Handset	Page 94 of 119

7.8.2 MIMO Radiated Band Edge Measurements (20MHz BW)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5935MHz
Channel:	2

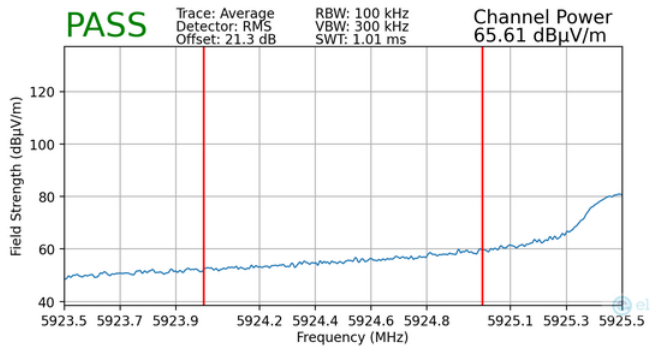


Plot 7-85. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5)

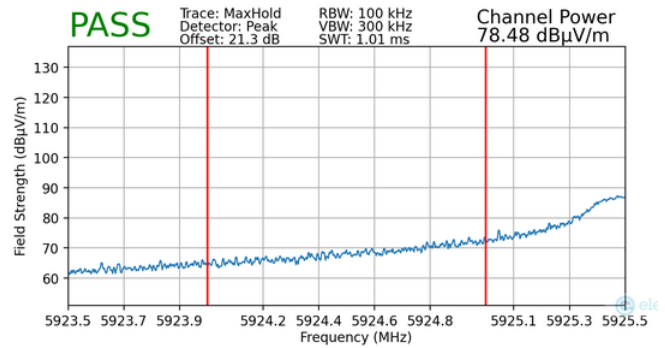


Plot 7-86. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	7115MHz
Channel:	233

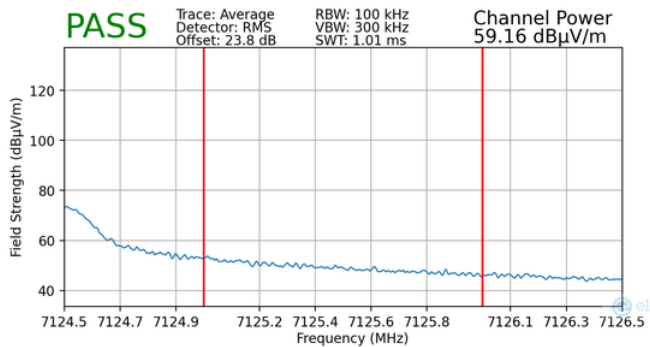


Plot 7-87. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8)

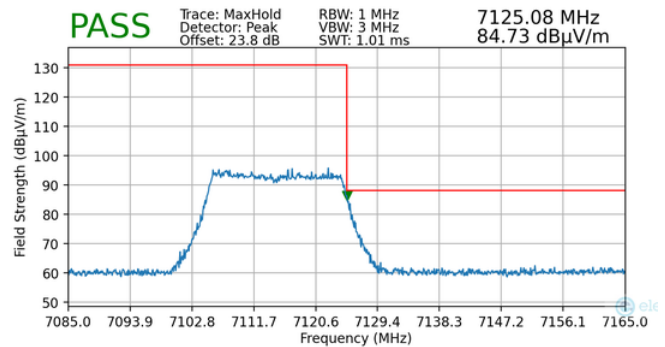


Plot 7-88. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8)

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508270082-18.A3L	Test Dates: 9/2/2025 - 11/18/2025	EUT Type: Portable Handset	Page 95 of 119

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5935MHz
 Channel: 2

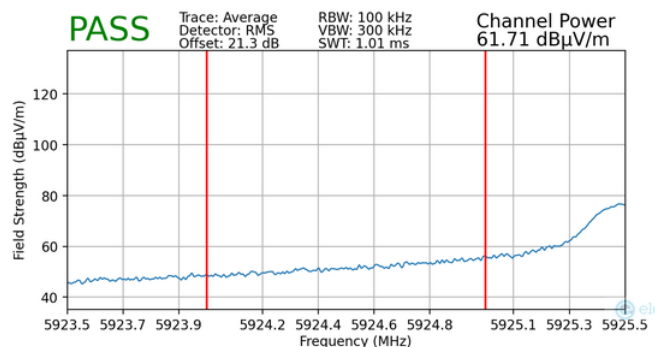

**Plot 7-89. Radiated Lower Band Edge Plot MIMO
(Average – UNII Band 5) – WCP**

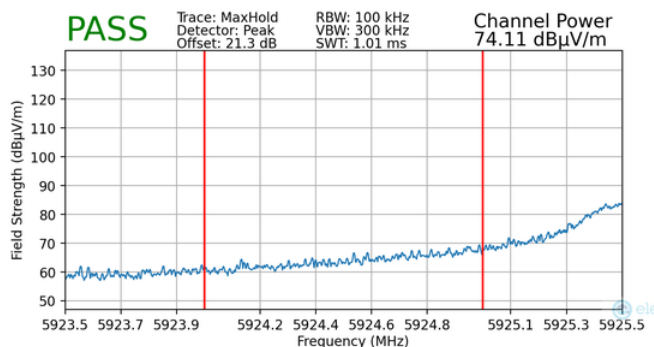


**Plot 7-90. Radiated Lower Band Edge Plot MIMO
(Peak – UNII Band 5) – WCP**


FCC ID: A3LSMS948JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508270082-18.A3L	Test Dates: 9/2/2025 - 11/18/2025	EUT Type: Portable Handset	Page 96 of 119

7.8.3 MIMO Radiated Band Edge Measurements (40MHz BW)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5965MHz
Channel:	3

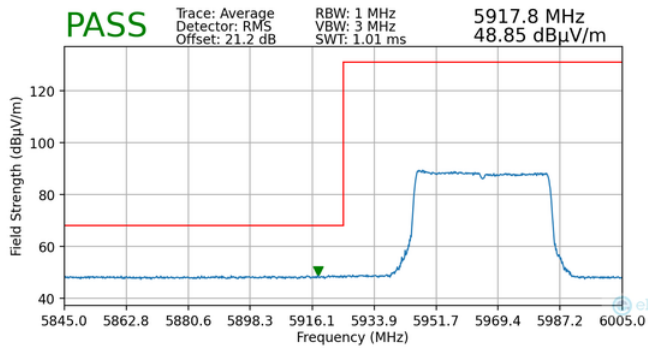


Plot 7-91. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5)

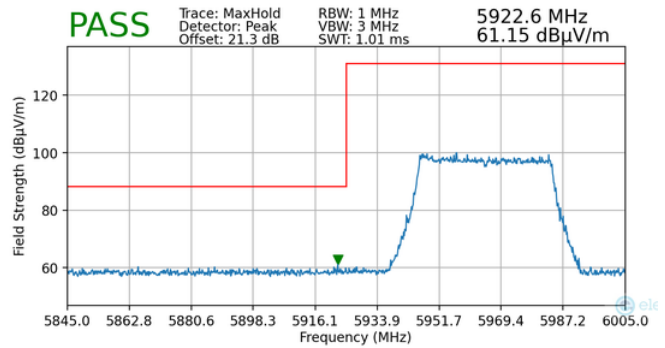


Plot 7-92. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	7085MHz
Channel:	227

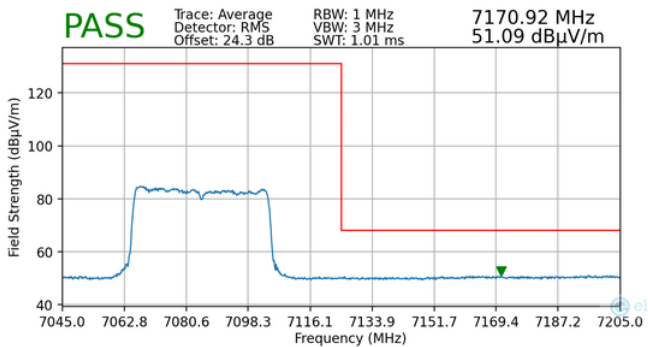

Plot 7-93. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8)

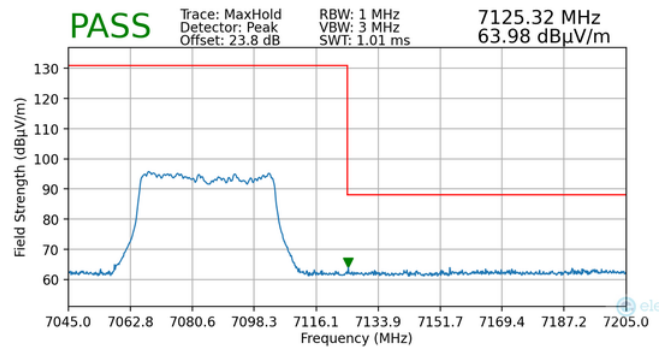


Plot 7-94. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8)


FCC ID: A3LSMS948JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508270082-18.A3L	Test Dates: 9/2/2025 - 11/18/2025	EUT Type: Portable Handset	Page 97 of 119

7.8.4 MIMO Radiated Band Edge Measurements (80MHz BW)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5985MHz
Channel:	7

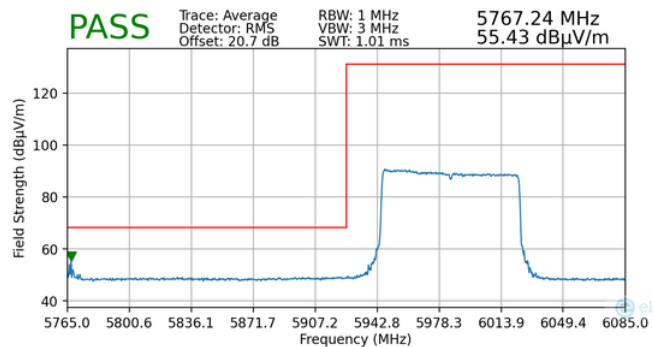


Plot 7-95. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5)

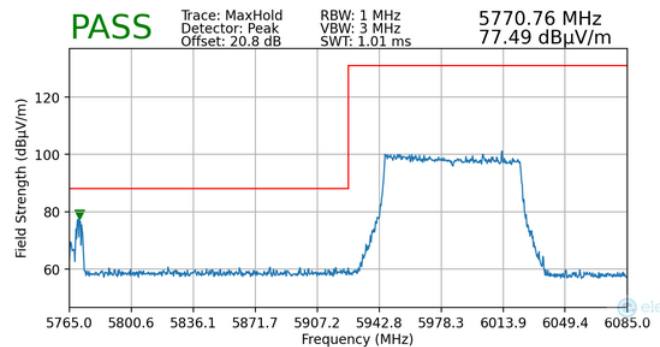


Plot 7-96. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	7025MHz
Channel:	215

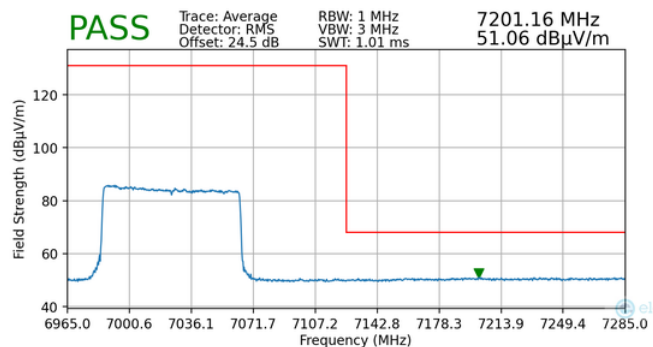

Plot 7-97. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8)

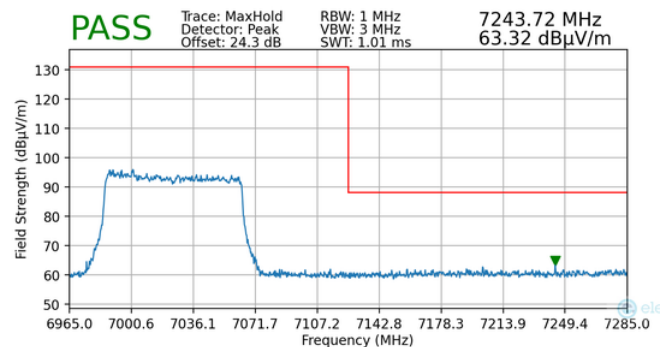


Plot 7-98. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8)


FCC ID: A3LSMS948JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508270082-18.A3L	Test Dates: 9/2/2025 - 11/18/2025	EUT Type: Portable Handset	Page 98 of 119

7.8.5 MIMO Radiated Band Edge Measurements (80MHz BW - Punctured)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5985MHz
Channel:	7

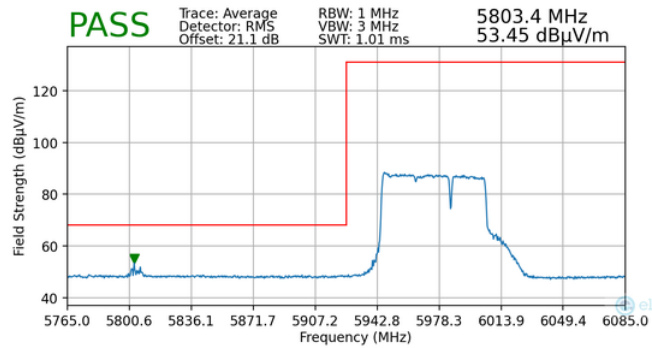


Plot 7-99. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5)

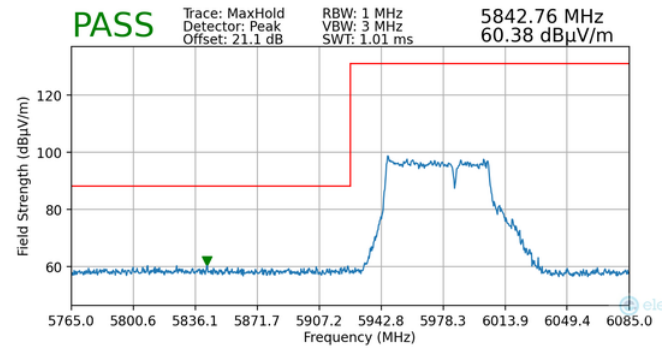


Plot 7-100. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	7025MHz
Channel:	215

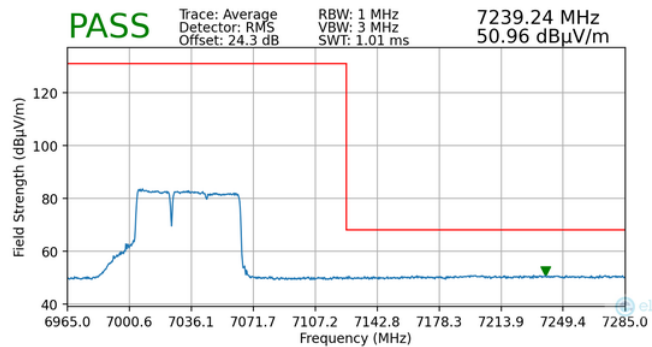

Plot 7-101. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8)

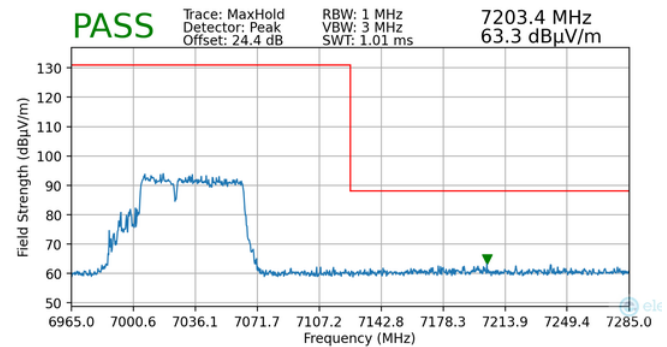


Plot 7-102. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8)


FCC ID: A3LSMS948JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508270082-18.A3L	Test Dates: 9/2/2025 - 11/18/2025	EUT Type: Portable Handset	Page 99 of 119

7.8.6 MIMO Radiated Band Edge Measurements (160MHz BW)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

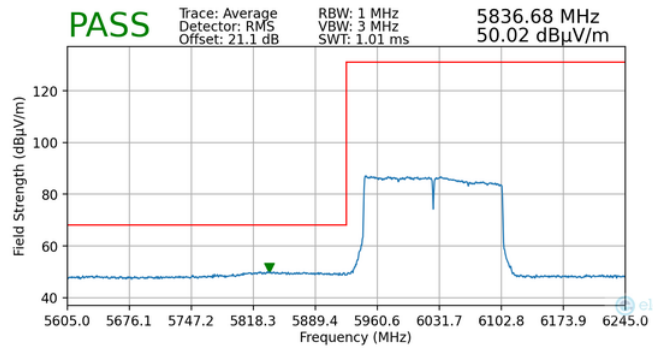


Plot 7-103. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5)

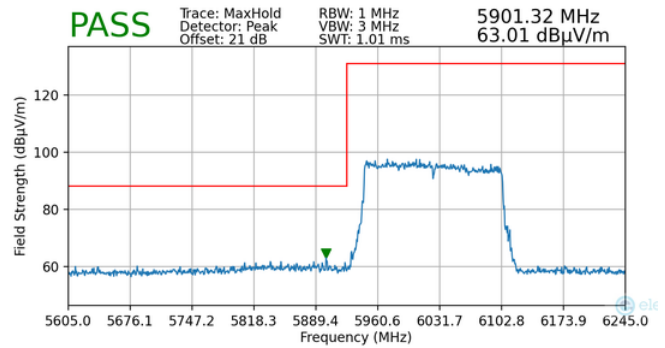


Plot 7-104. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6985MHz
Channel:	207

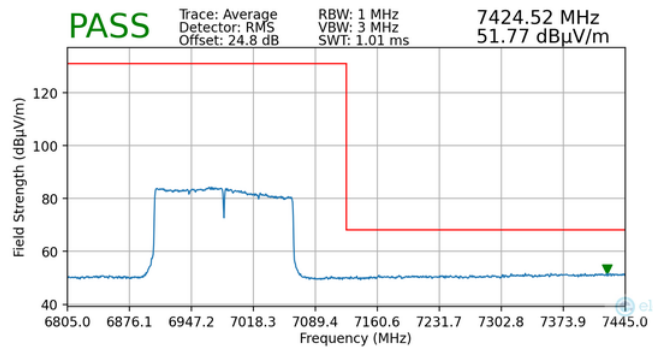

Plot 7-105. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8)

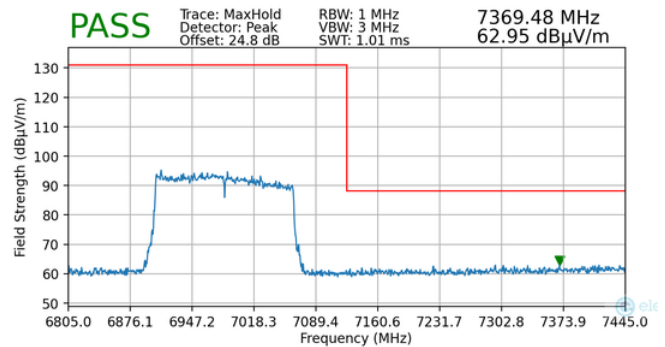


Plot 7-106. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8)


FCC ID: A3LSMS948JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508270082-18.A3L	Test Dates: 9/2/2025 - 11/18/2025	EUT Type: Portable Handset	Page 100 of 119

7.8.7 MIMO Radiated Band Edge Measurements (160MHz BW - Punctured)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

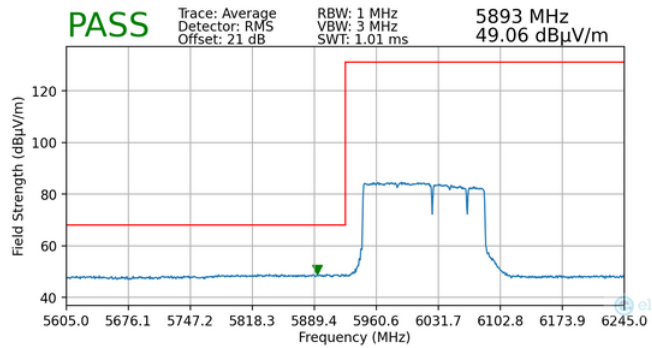


Plot 7-107. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5)

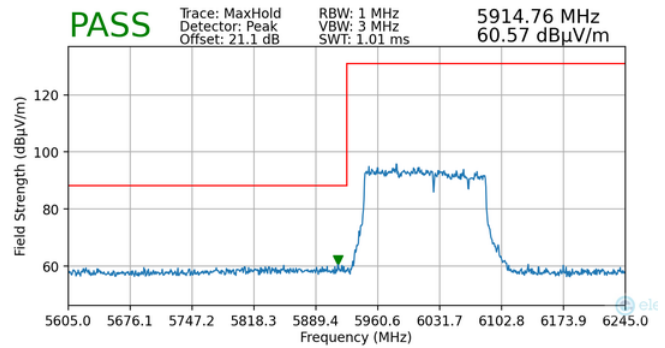


Plot 7-108. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6985MHz
Channel:	207

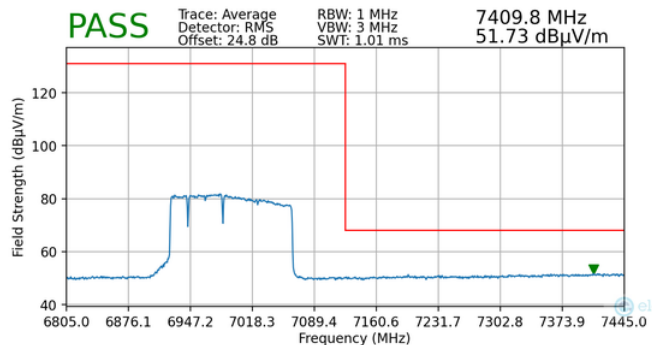

Plot 7-109. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8)

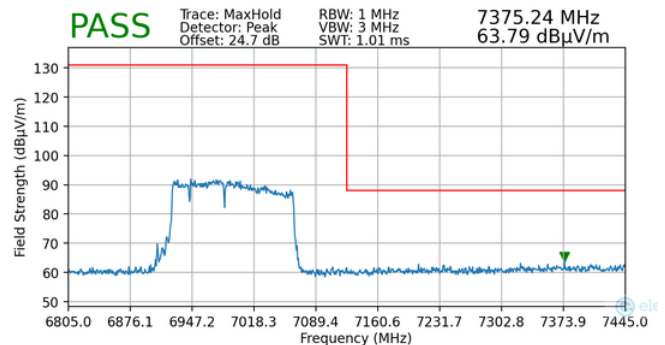


Plot 7-110. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8)


FCC ID: A3LSMS948JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508270082-18.A3L	Test Dates: 9/2/2025 - 11/18/2025	EUT Type: Portable Handset	Page 101 of 119

7.8.8 MIMO Radiated Band Edge Measurements (320MHz BW)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6105MHz
Channel:	31

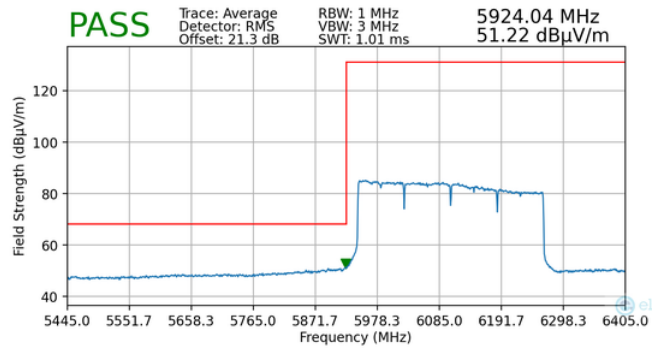


Plot 7-111. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5)

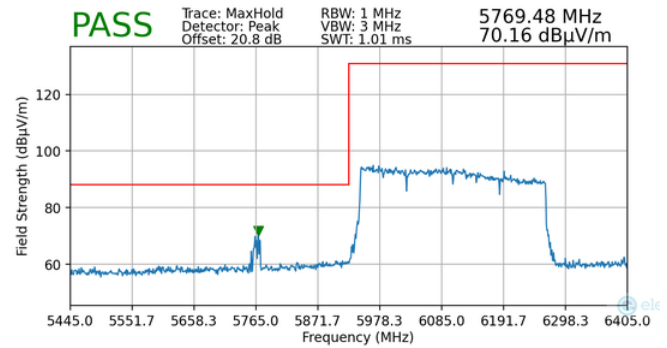


Plot 7-112. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6905MHz
Channel:	191

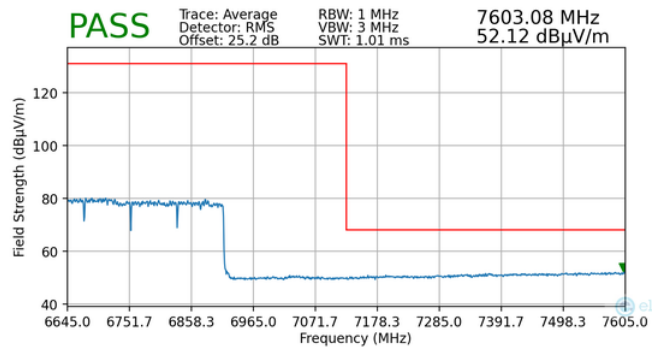

Plot 7-113. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8)

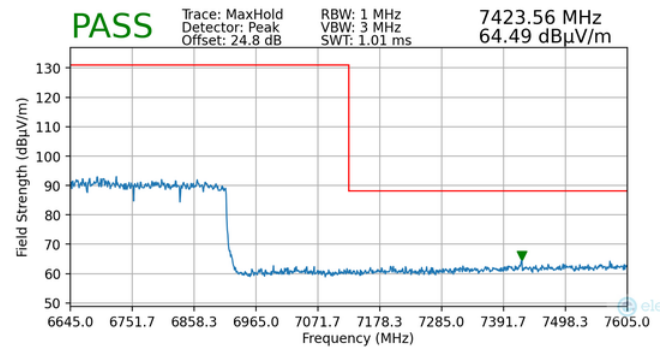


Plot 7-114. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8)


FCC ID: A3LSMS948JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508270082-18.A3L	Test Dates: 9/2/2025 - 11/18/2025	EUT Type: Portable Handset	Page 102 of 119

7.8.9 MIMO Radiated Band Edge Measurements (320MHz BW – Punctured)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6105MHz
Channel:	31

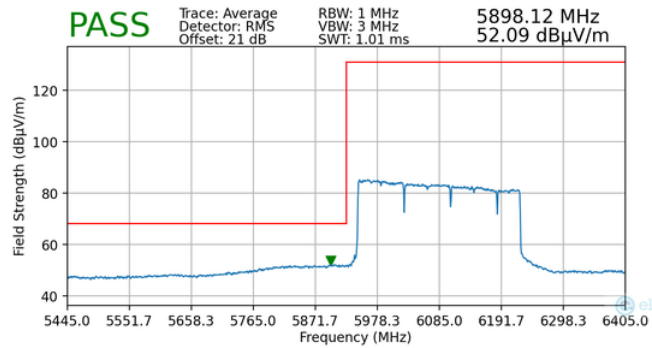


Plot 7-115. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5)

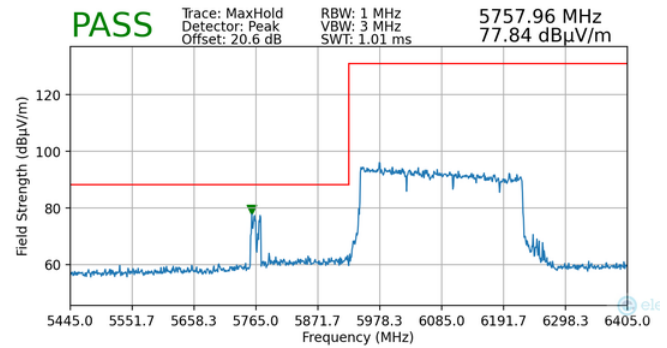


Plot 7-116. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6905MHz
Channel:	191

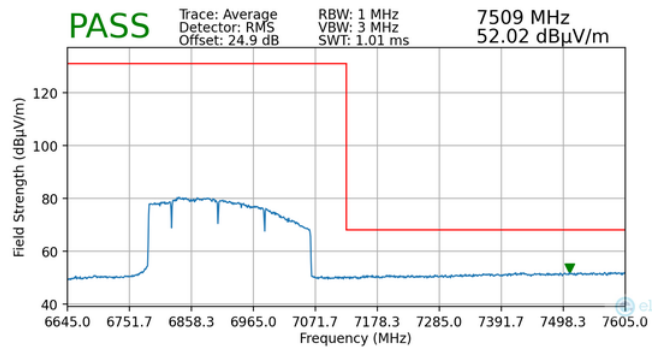

Plot 7-117. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8)

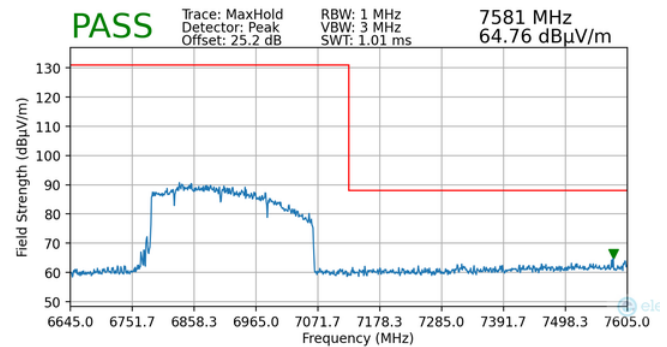

Plot 7-118. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8)

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508270082-18.A3L	Test Dates: 9/2/2025 - 11/18/2025	EUT Type: Portable Handset	Page 103 of 119

7.9 Line Conducted Test Data

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst-case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207.

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-35. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10:2020, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest.
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize.

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest.
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize.

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508270082-18.A3L	Test Dates: 9/2/2025 - 11/18/2025	EUT Type: Portable Handset	Page 104 of 119

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


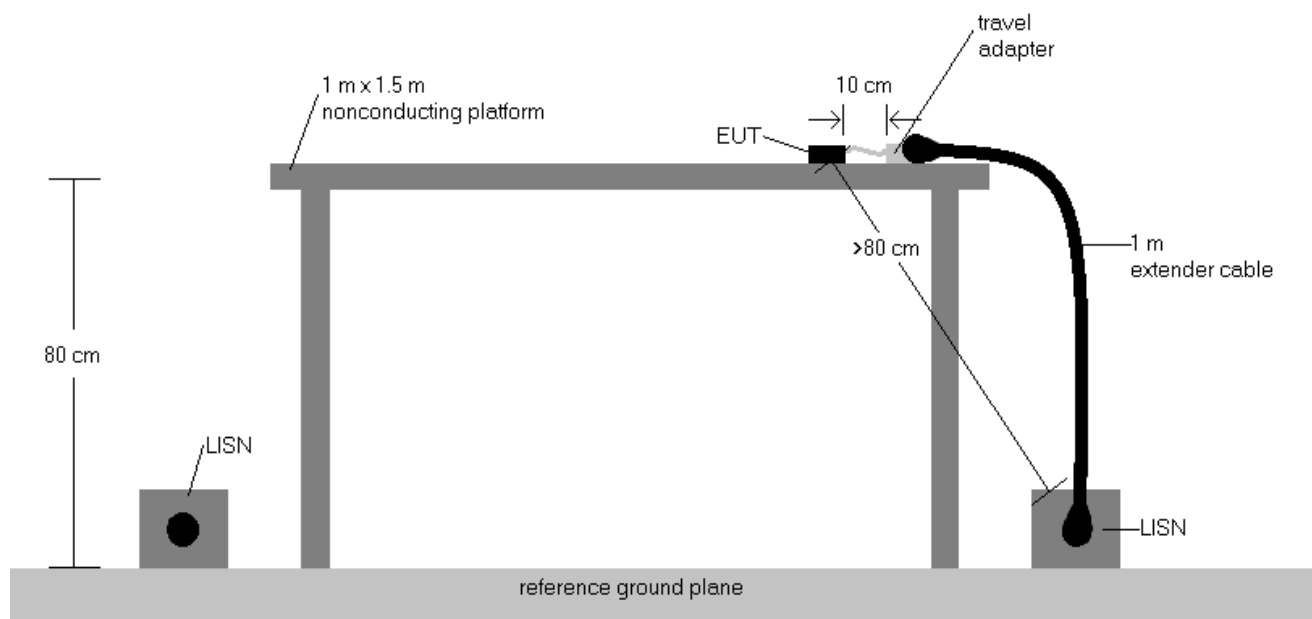


Figure 7-10. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated, and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz is specified in 15.207.
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508270082-18.A3L	Test Dates: 9/2/2025 - 11/18/2025	EUT Type: Portable Handset	Page 105 of 119

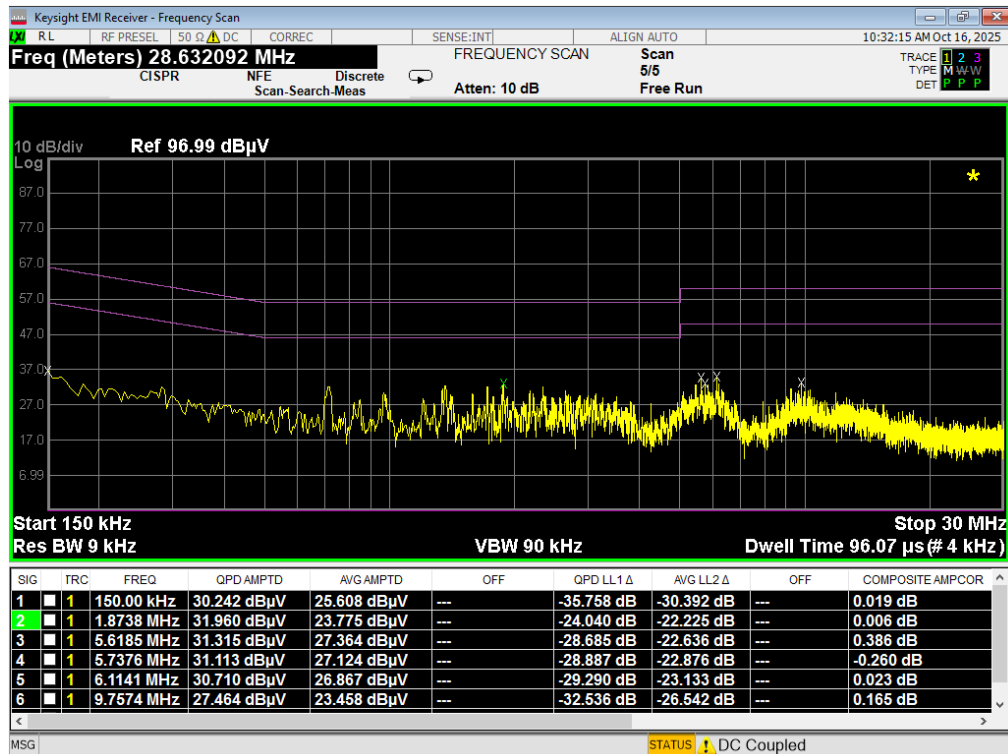


Plot 7-119. Line Conducted Plot with 802.11a UNII Band 5 (L1)

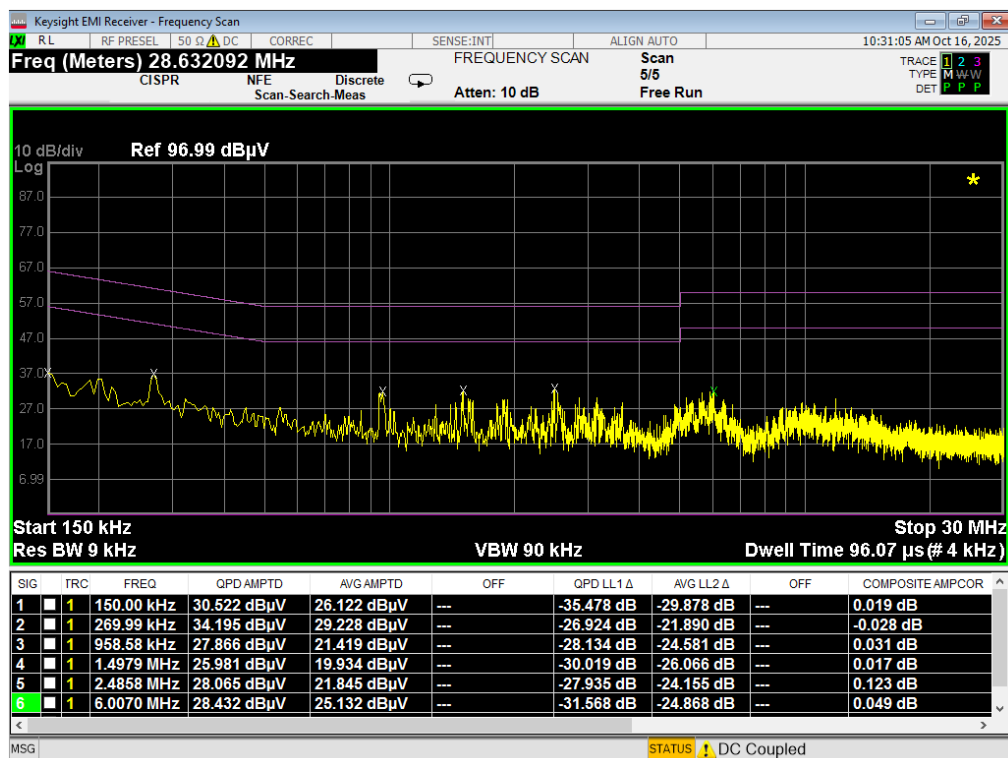


Plot 7-120. Line Conducted Plot with 802.11a UNII Band 5 (N)

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508270082-18.A3L	Test Dates: 9/2/2025 - 11/18/2025	EUT Type: Portable Handset	Page 106 of 119

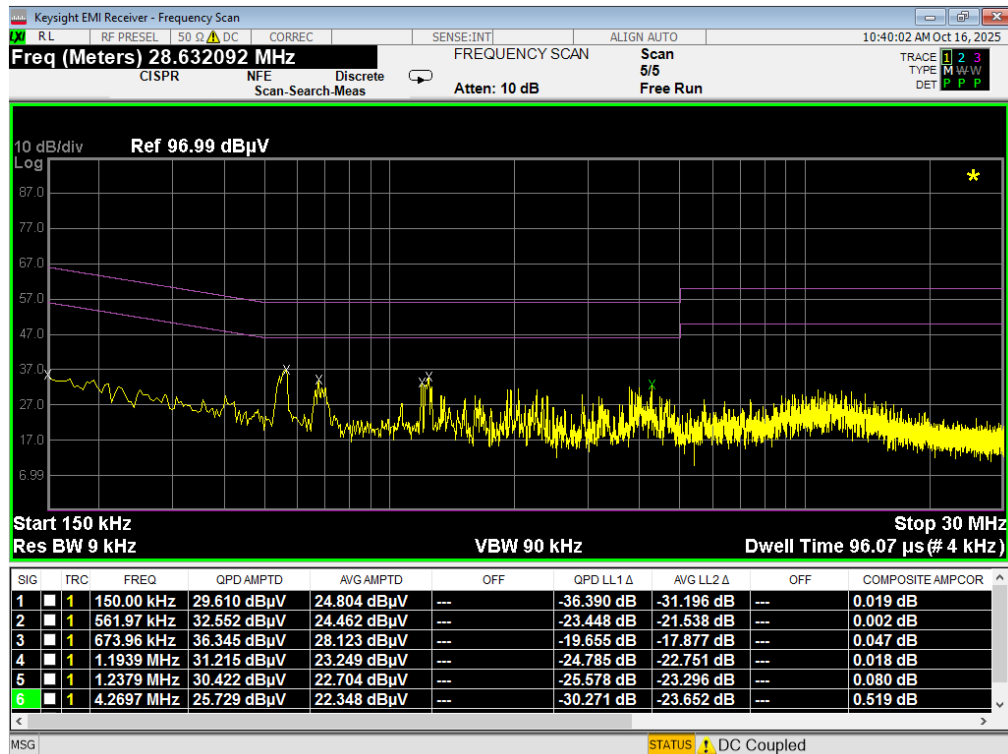


Plot 7-121. Line Conducted Plot with 802.11a UNII Band 6 (L1)

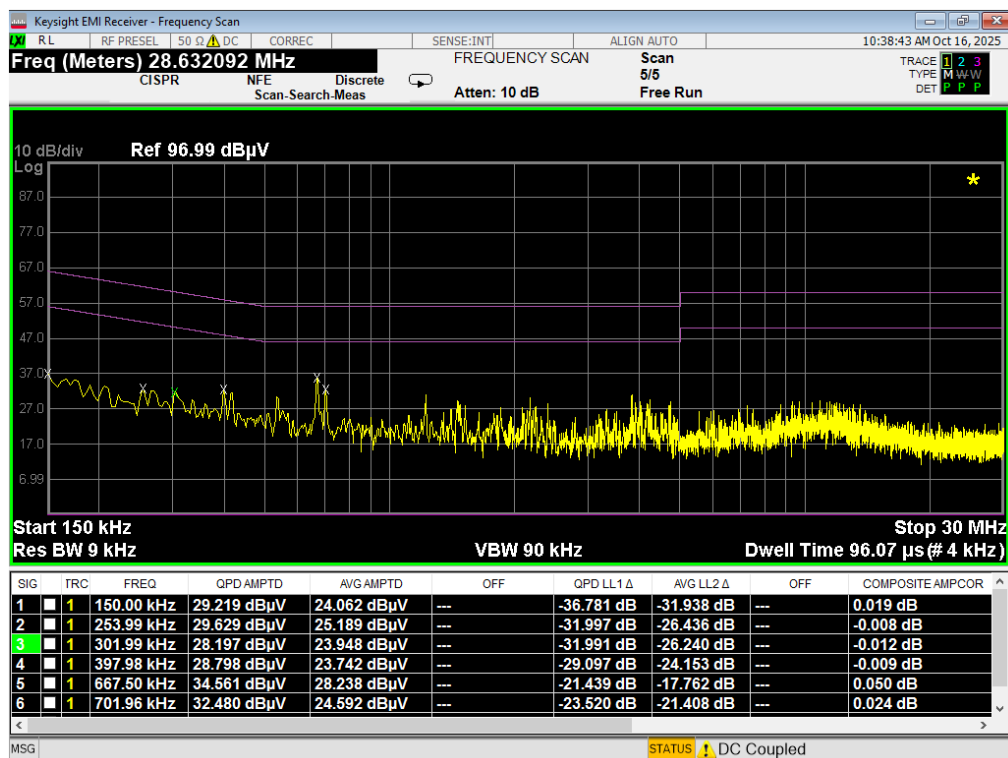


Plot 7-122. Line Conducted Plot with 802.11a UNII Band 6 (N)

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508270082-18.A3L	Test Dates: 9/2/2025 - 11/18/2025	EUT Type: Portable Handset	Page 107 of 119

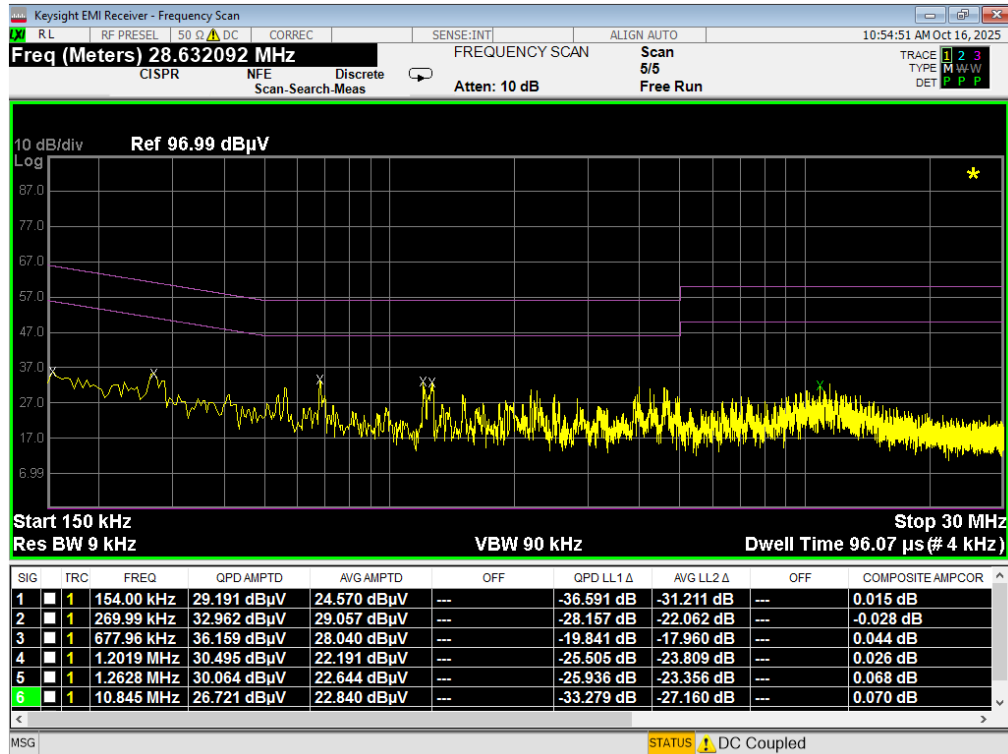


Plot 7-123. Line Conducted Plot with 802.11a UNII Band 7 (L1)

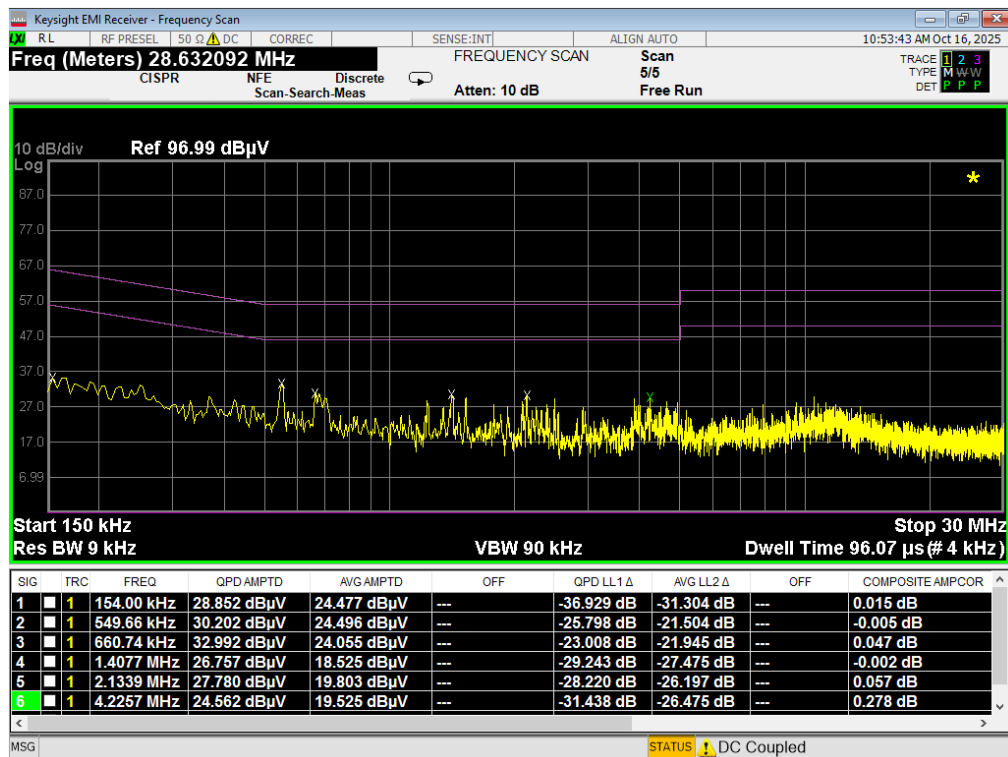


Plot 7-124. Line Conducted Plot with 802.11a UNII Band 7 (N)

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508270082-18.A3L	Test Dates: 9/2/2025 - 11/18/2025	EUT Type: Portable Handset	Page 108 of 119

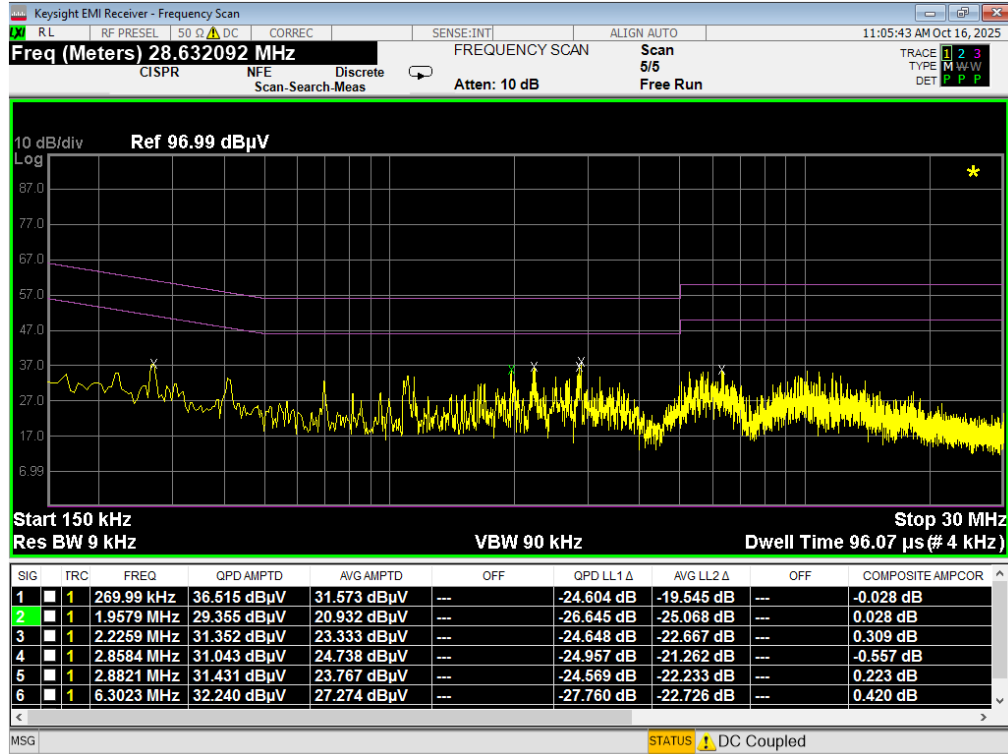


Plot 7-125. Line Conducted Plot with 802.11a UNII Band 8 (L1)

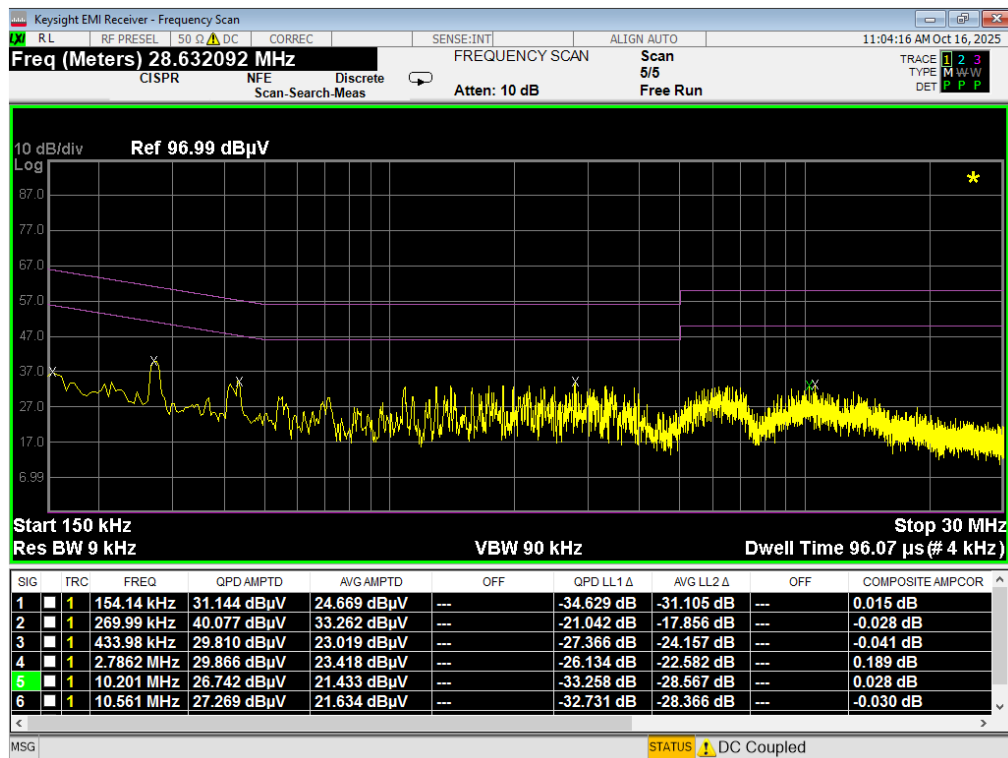


Plot 7-126. Line Conducted Plot with 802.11a UNII Band 8 (N)

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508270082-18.A3L	Test Dates: 9/2/2025 - 11/18/2025	EUT Type: Portable Handset	Page 109 of 119

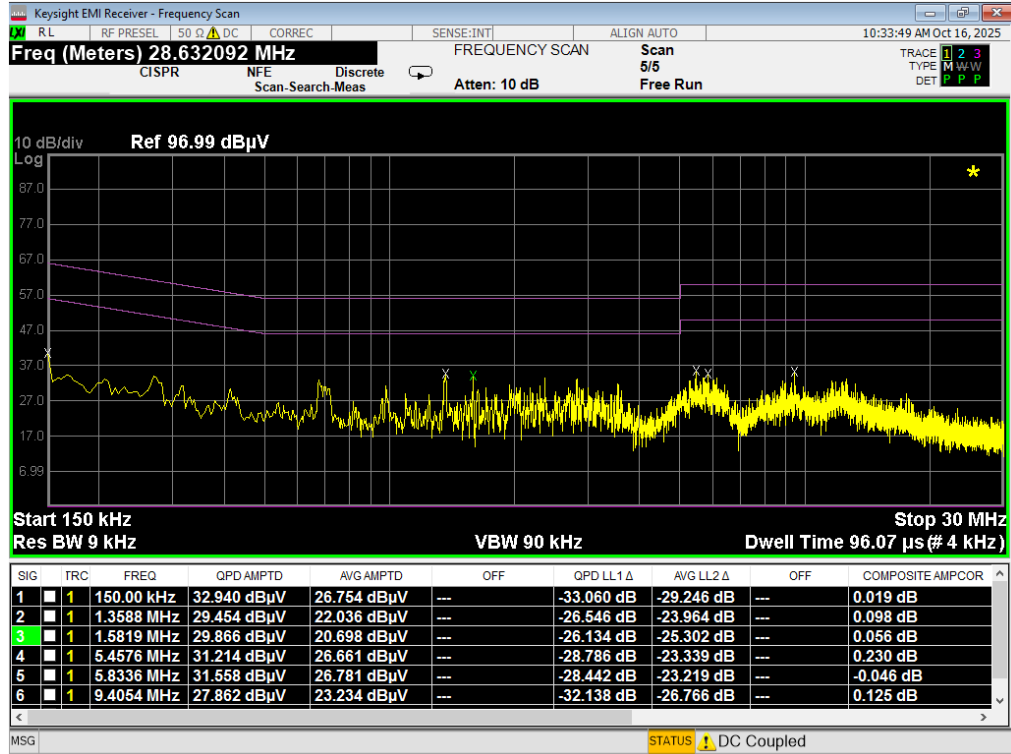


Plot 7-127. Line Conducted Plot with 802.11a UNII Band 5 (L1) with WCP

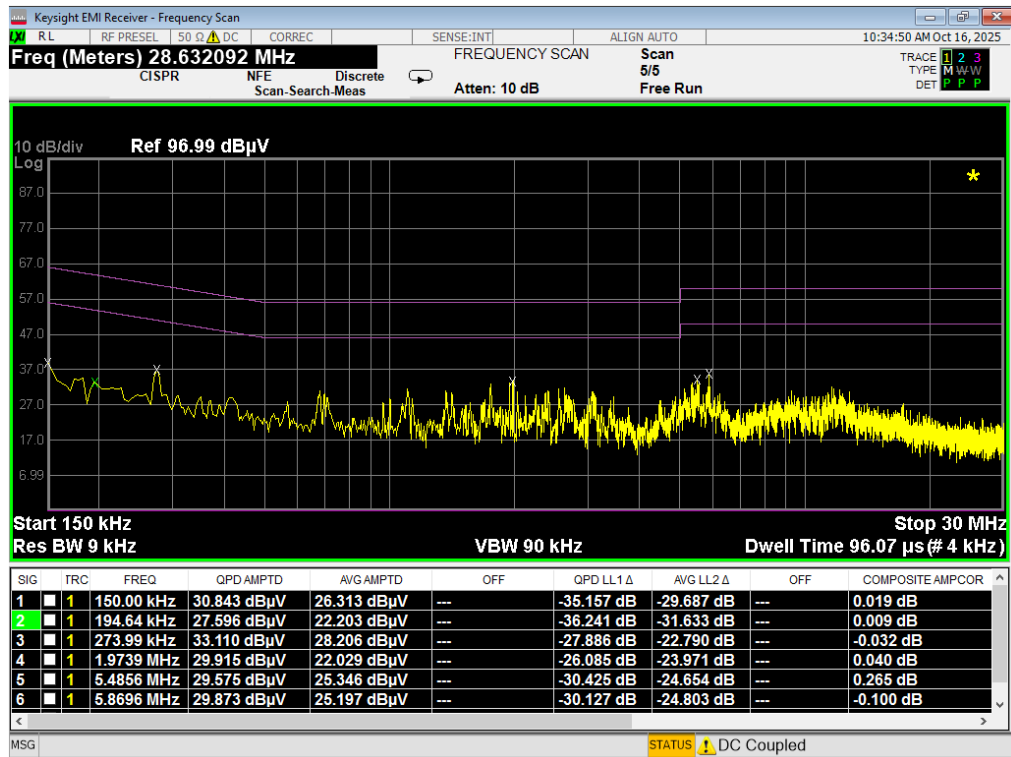


Plot 7-128. Line Conducted Plot with 802.11a UNII Band 5 (N) with WCP

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508270082-18.A3L	Test Dates: 9/2/2025 - 11/18/2025	EUT Type: Portable Handset	Page 110 of 119

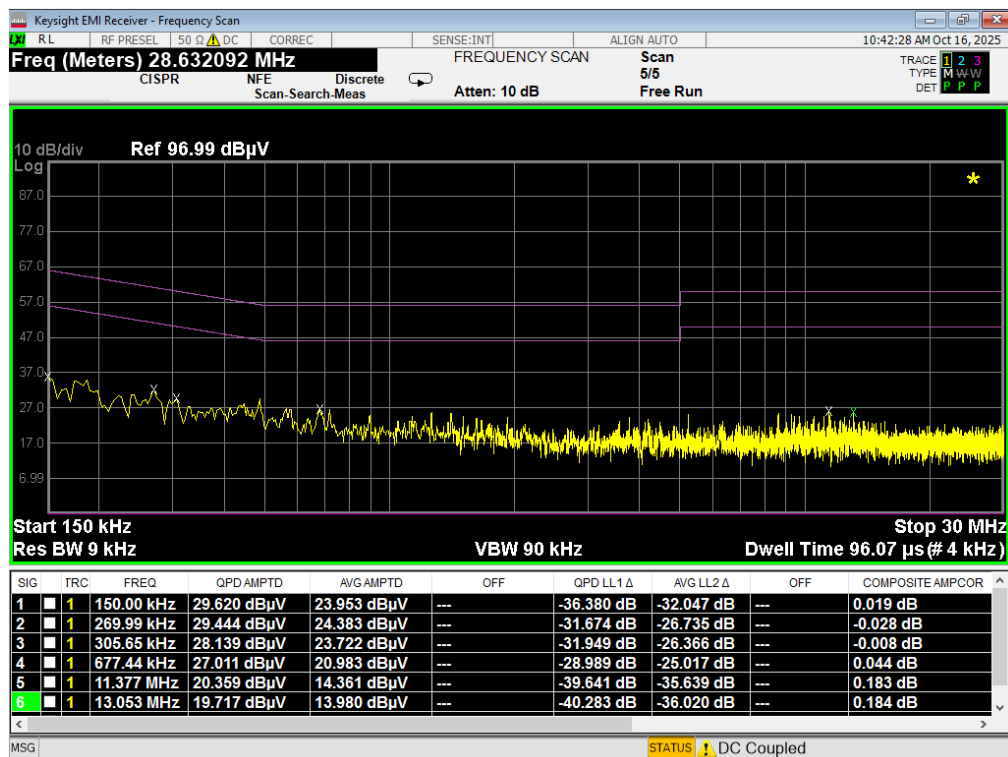


Plot 7-129. Line Conducted Plot with 802.11a UNII Band 6 (L1) with WCP

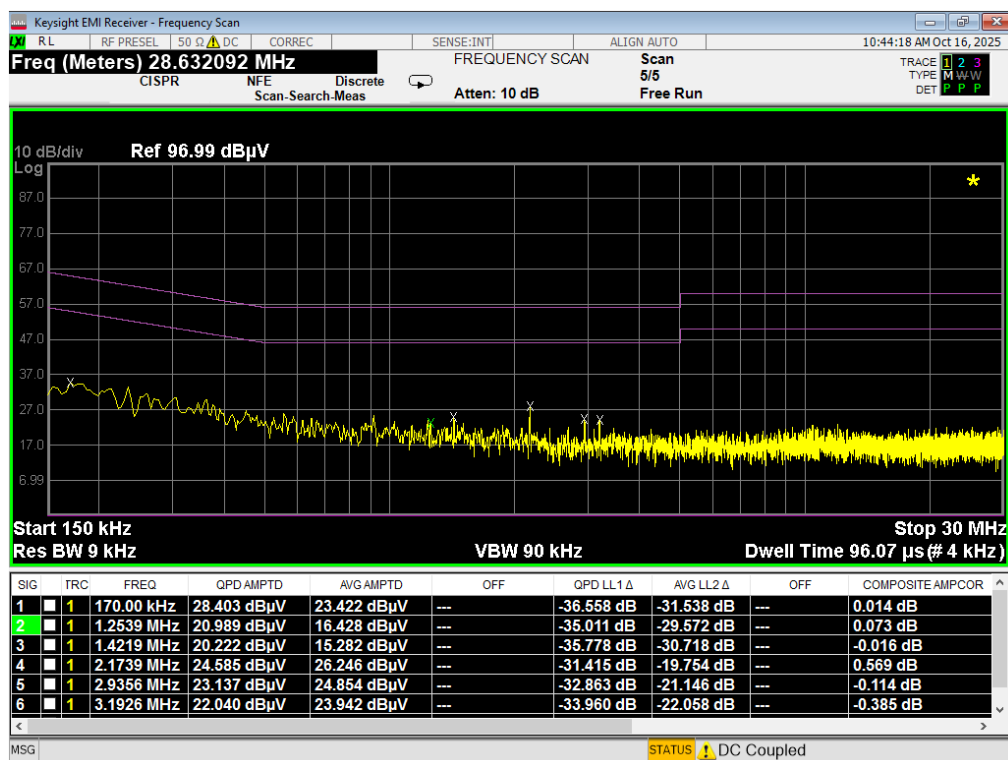


Plot 7-130. Line Conducted Plot with 802.11a UNII Band 6 (N) with WCP

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508270082-18.A3L	Test Dates: 9/2/2025 - 11/18/2025	EUT Type: Portable Handset	Page 111 of 119

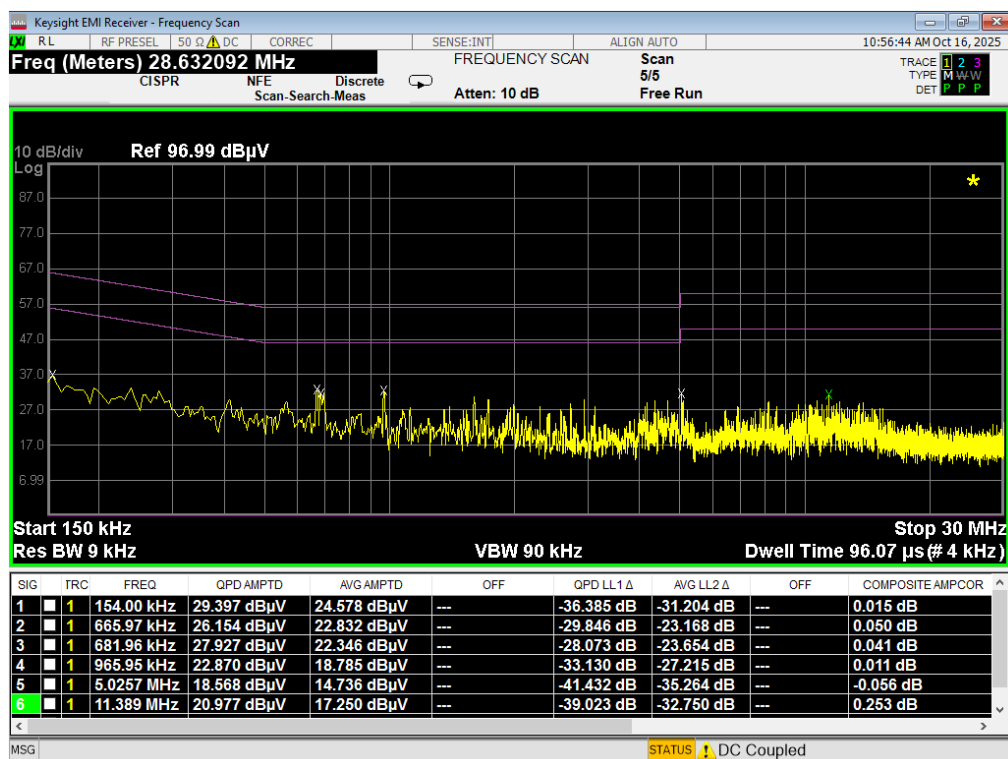


Plot 7-131. Line Conducted Plot with 802.11a UNII Band 7 (L1) with WCP

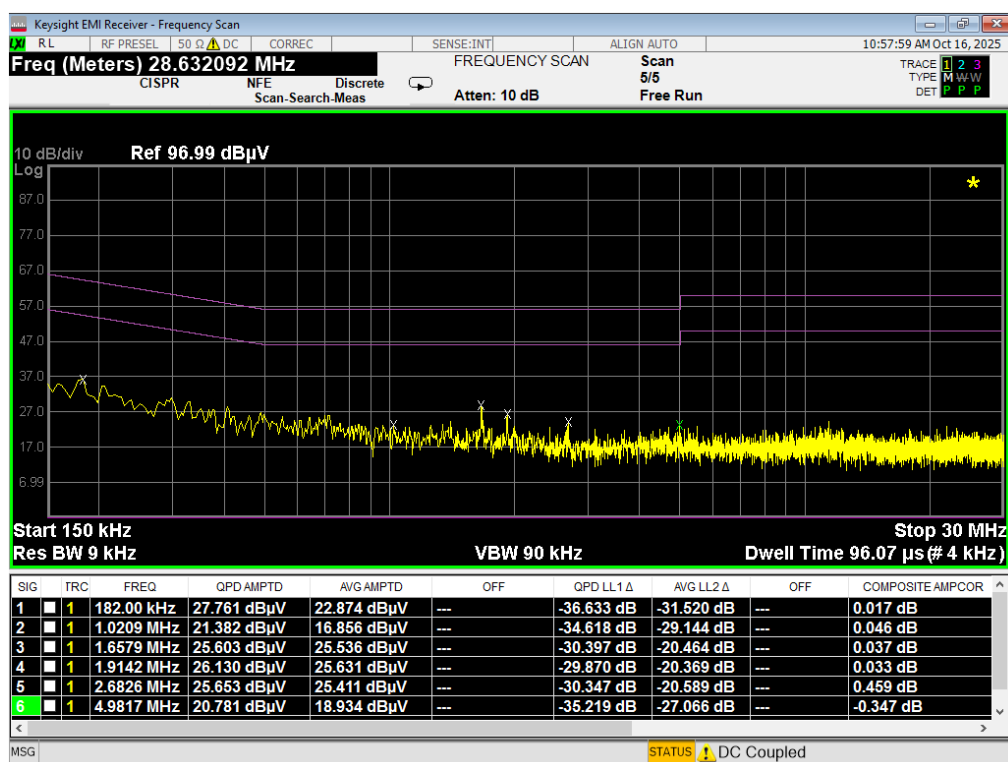


Plot 7-132. Line Conducted Plot with 802.11a UNII Band 7 (N) with WCP

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508270082-18.A3L	Test Dates: 9/2/2025 - 11/18/2025	EUT Type: Portable Handset	Page 112 of 119

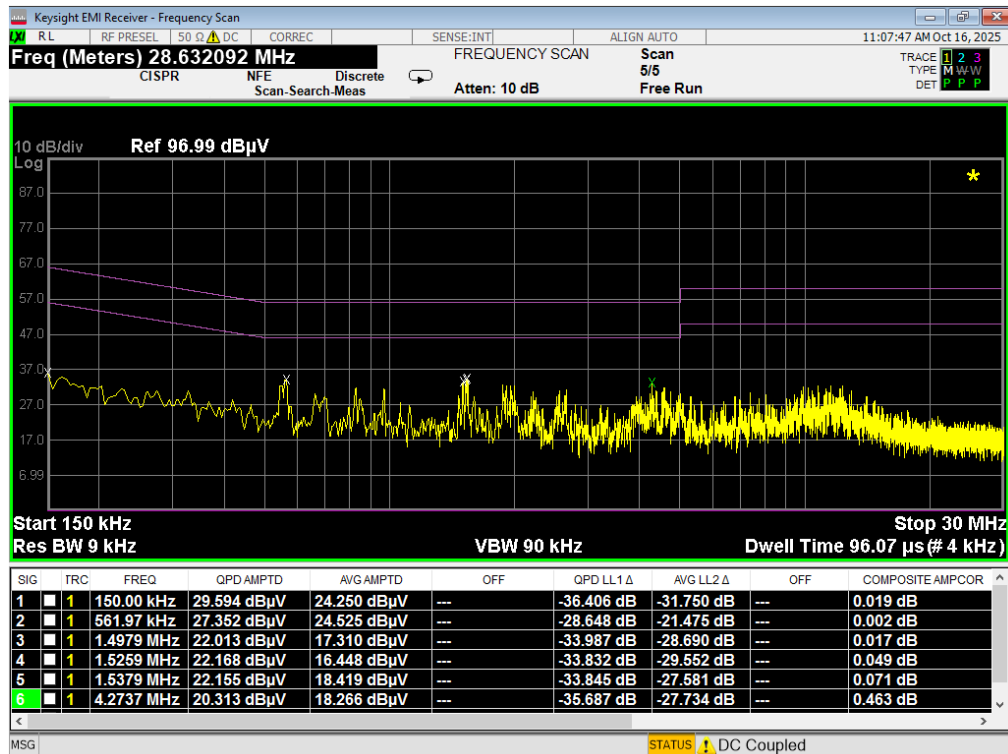

Plot 7-133. Line Conducted Plot with 802.11a UNII Band 8 (L1) with WCP

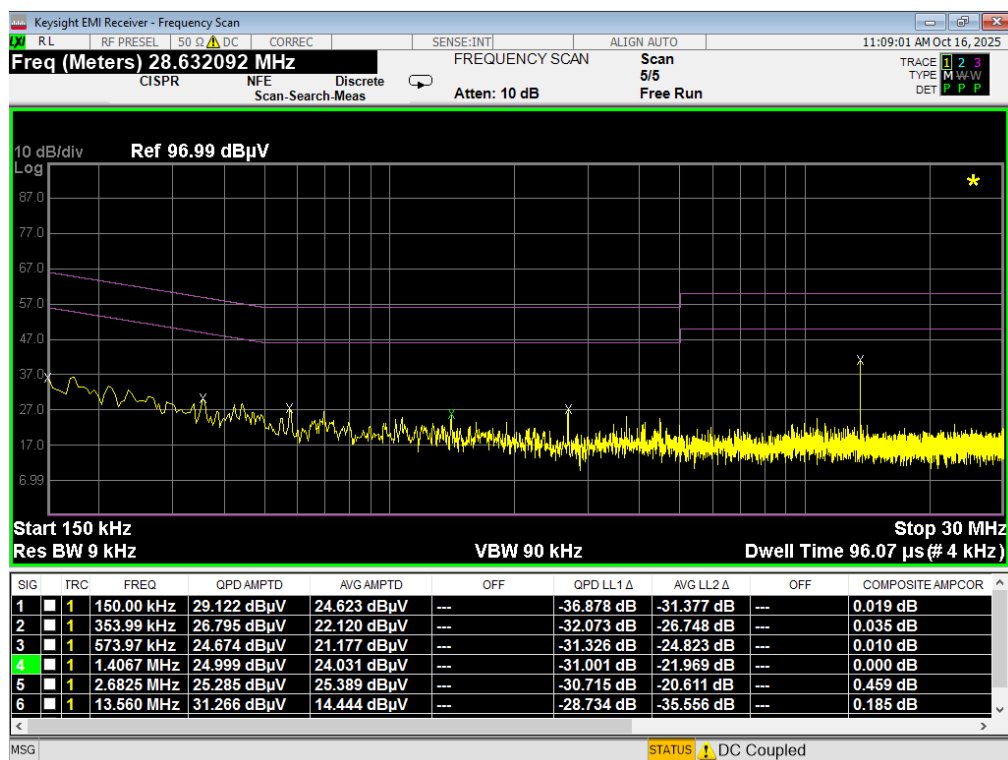

Plot 7-134. Line Conducted Plot with 802.11a UNII Band 8 (N) with WCP

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508270082-18.A3L	Test Dates: 9/2/2025 - 11/18/2025	EUT Type: Portable Handset	Page 113 of 119

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMS948JPN** is in compliance with FCC Part Subpart E (15.407) of the FCC Rules for a Very Low Power device. The data referenced from **FCC ID: A3LSMS948U** (Model SM-S948U) included in this report have been reviewed and are deemed acceptable to support the compliance of **FCC ID: A3LSMS948JPN**.

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508270082-18.A3L	Test Dates: 9/2/2025 - 11/18/2025	EUT Type: Portable Handset	Page 114 of 119

9.0 APPENDIX A – DATA REFERENCING SPOT-CHECKS

Overview

The spot-check data presented in this section was measured on the variant model following the guidance of the FCC's Data Referencing guidance in KDB 484596 D01 v03. Each spot-check test on the EUT was performed using the same procedure and setting that were used to perform the test on the corresponding reference device. For the worst-case RSE data, the measurement is determined by an actual emission and not by noise floor.

All test cases were performed to verify the variant EUT is still in compliance with the spot-checked results to the reference device and was performed using the guidance of ANSI C63.10:2020.

Notes

Each spot check test on the EUT was performed using the same procedure and setting that were used to perform the test on the corresponding reference device.

Conducted Spot-Checks – Model: SC-53G

6GHz WIFI (20MHz 802.11be MIMO)						Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]						
			ANT1	ANT2	MIMO				
UNII-5	5955	1	3.96	4.73	7.37	-1.90	5.47	14.00	-8.53
UNII-6	6475	105	4.88	5.16	8.03	-2.22	5.81	14.00	-8.19
UNII-7	6675	145	5.58	5.26	8.43	-2.22	6.21	14.00	-7.79
UNII-8	6995	209	5.72	5.74	8.74	-2.14	6.60	14.00	-7.40


Table 9-1. Conducted Output Power Measurements (Spot-check)

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508270082-18.A3L	Test Dates: 9/2/2025 - 11/18/2025	EUT Type: Portable Handset	Page 115 of 119

Contention Based Protocol Detection Spot-check – Model: SC-53G

	Channel	Channel Freq [MHz]	Channel BW [MHz]	Incumbent Freq [MHz]	Injected (AWGN) [dBm]	Antenna Gain [dBi]	Path Loss (dB)	Adjusted Power Level [dBm]	Detection Limit [dBm]	Margin [dB]
UNII	63	6265	320	6110	-68.90	-4.97	0.58	-63.35	-62.0	-1.35

Table 9-2. Contention Based Protocol – Incumbent Detection – Spot-check (SM-S948B/DS)

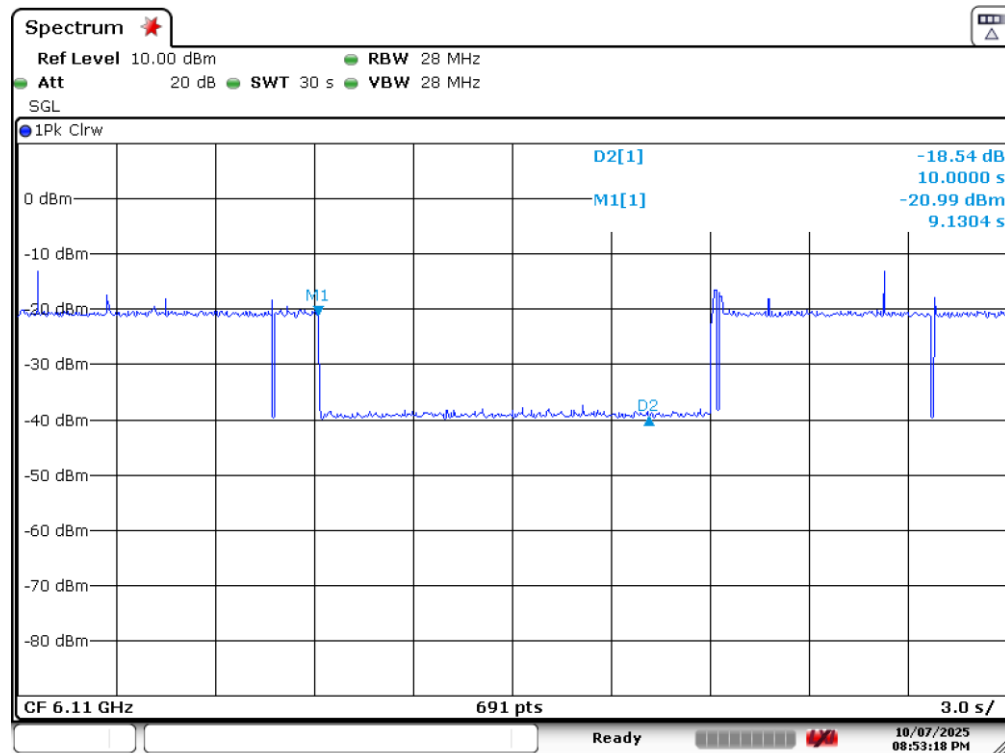


Date: 7.OCT.2025 20:53:18

Plot 9-1. Contention Based Protocol Timing Plot (320MHz (UNII Band 5) – Ch.31 Low)

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508270082-18.A3L	Test Dates: 9/2/2025 - 11/18/2025	EUT Type: Portable Handset	Page 116 of 119


Contention Based Protocol Incumbent Avoidance Spot-Check

- When a 10 MHz AWGN signal centered at 6590 MHz (lower edge of channel) is injected, the channel completely stops transmitting.
- When a 10 MHz AWGN signal centered at 6745 MHz (middle of channel) is injected, the channel reduces bandwidth to the lowest 80MHz.
- When a 10 MHz AWGN signal centered at 6900 MHz (upper edge of channel) is injected, the channel reduces bandwidth to the lowest 160MHz.

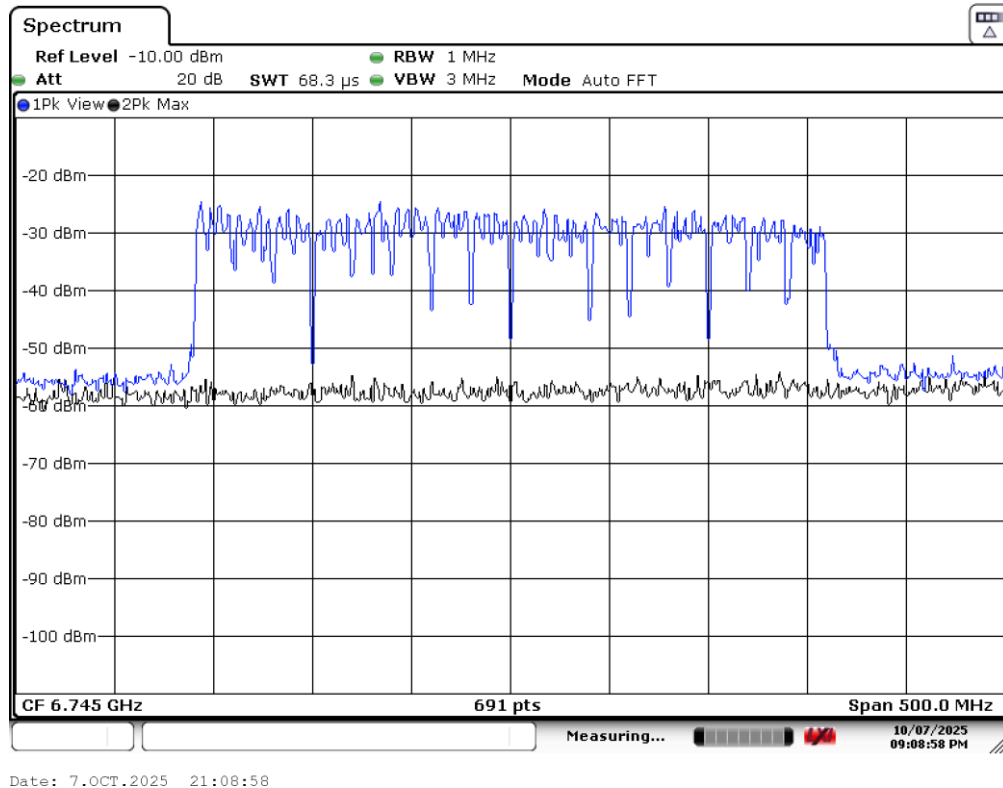


Plot 9-2. CBP 320MHz Channel - Injection Lower Edge – [6590 MHz]

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508270082-18.A3L	Test Dates: 9/2/2025 - 11/18/2025	EUT Type: Portable Handset	Page 117 of 119

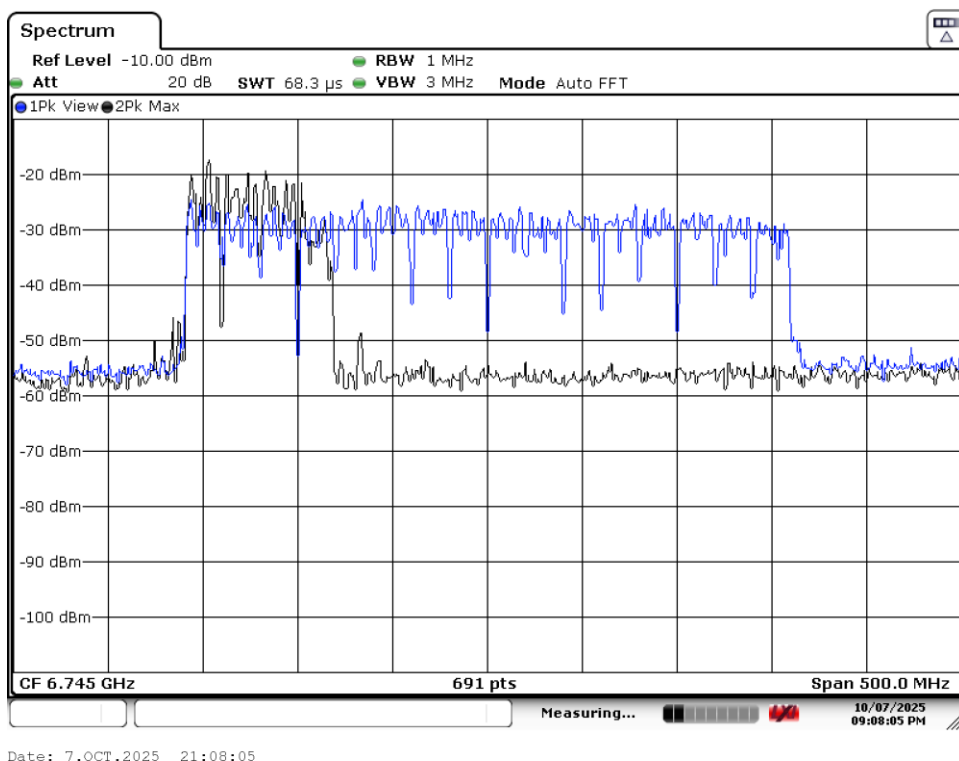

Plot 9-3. CBP 320MHz Channel - Injection Center – 6745 MHz]

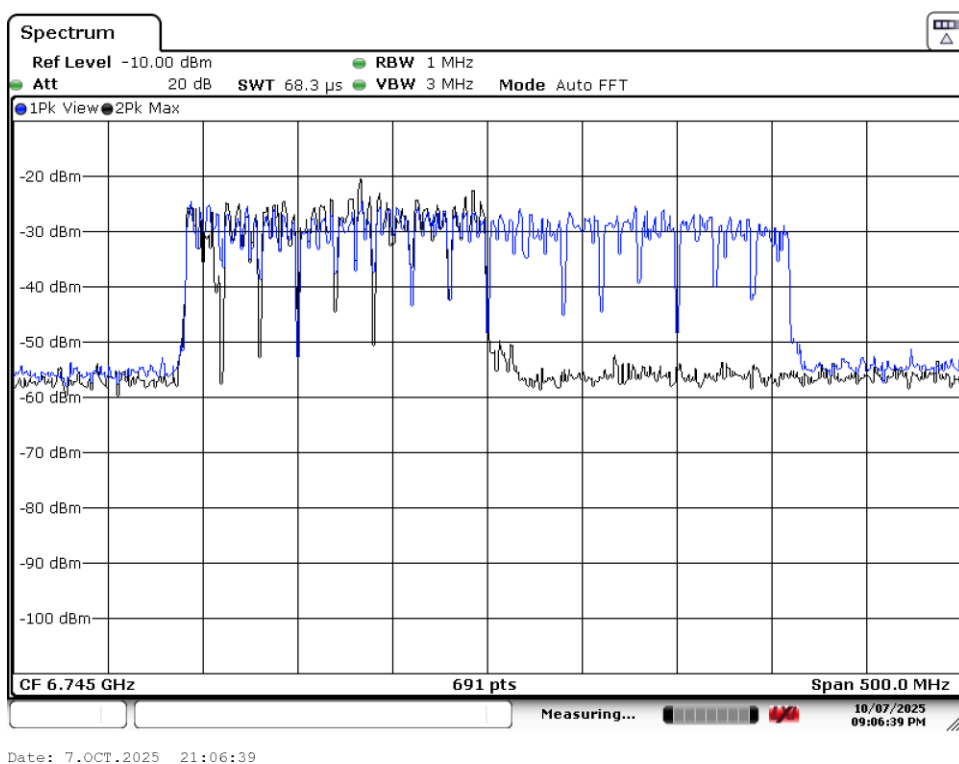

Plot 9-4. CBP 320MHz Channel - Injection Upper Edge – [6900 MHz]


FCC ID: A3LSMS948JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508270082-18.A3L	Test Dates: 9/2/2025 - 11/18/2025	EUT Type: Portable Handset	Page 118 of 119

Radiated Spot-Checks – Model: SC-53G

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11a	MIMO	5	45	6175	*	12350.00	Average	V	-	-	-91.81	22.86	38.05	53.98	-15.93
					*	12350.00	Peak	V	-	-	-70.76	22.86	59.10	73.98	-14.88

Table 9-3. RSE Measurements (Spot-check)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5935MHz
 Channel: 2

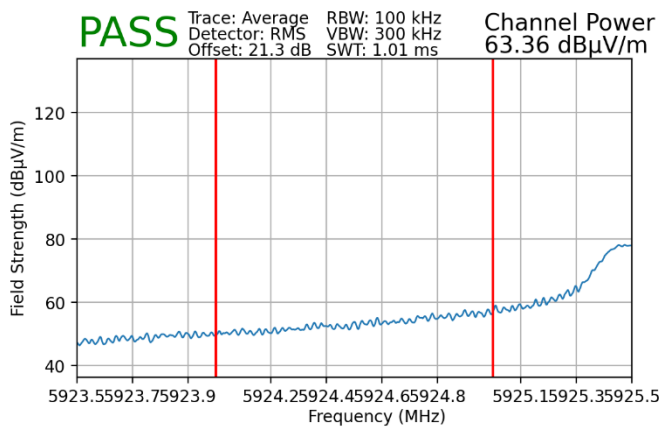

Plot 9-5. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5)

Results

FCC Rules	Test Item	Test Case	Units	Limit	Reference Model: SM-S948U	Variant Model: SM-S948D	Deviation (dB)	Max Deviation (dB)	Pass/Fail
2.1046, 15.407(a)(8)	Conducted Output Power	Mid Channel Each UNII Band - 802.11be 20MHz - VLP	dBm	N/A	7.53	7.37	-0.16	1	PASS
					8.23	8.03	-0.20	1	PASS
					8.3	8.43	0.13	1	PASS
					8.76	8.74	-0.02	1	PASS
15.407(a)(9)	Contention Based Protocol	Ch.63 - 320MHz	dBm	-62	-63.25	-63.35	-0.10	2	PASS
15.209	Radiated Spurious Emissions	802.11a MIMO Ch.45 - Average - 12350 MHz	dBμV/m	53.98	38.1	38.05	-0.05	3	PASS
15.209	Radiated Band Edge Emissions	802.11a MIMO Ch.2 - Average	dBμV/m	68.2	65.61	63.36	-2.25	3	PASS

Table 9-4. Summary of Spot-checks

- END OF TEST REPORT -

FCC ID: A3LSMS948JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2508270082-18.A3L	Test Dates: 9/2/2025 - 11/18/2025	EUT Type: Portable Handset	Page 119 of 119