

TEST REPORT

1. Applicant

Name : SAMSUNG ELECTRONICS CO.,LTD.
Address : 416 Maetan3-Dong Yeongtong-gu, Suwon city,
Gyeonggi-Do, Korea 443-742

2. Products

Name : AT&T HomeManger
Model/Type : SMT-i8110
Manufacturer : SAMSUNG ELECTRONICS CO.,LTD.

3. Test Standard : FCC CFR 47 Part 15, Subpart D


4. Test Method : ANSI C63.17-2006

5. Test Result : Positive

6. Date of Application : January 14, 2008

7. Date of Issue : February 19, 2008

Tested by



Sung-Kyu Cho

Telecommunication Team
Engineer

Approved by



Seok-Jin Kim

Telecommunication Team
Manager

The test results contained apply only to the test sample(s) supplied by the applicant, and this test report shall not be reproduced in full or in part without approval of the KTL in advance.

Korea Testing Laboratory

TABLE OF CONTENTS

I. GENERAL INFORMATION.....	3
1. Applicant (client)	
2. Equipment (EUT)	
3. Testing Laboratory	
II. SUMMARY OF TEST RESULTS.....	5
III. TEST FACILITY.....	7
IV. TEST RESULTS.....	8
4.1 Antenna Requirements.....	8
4.2 Digital Modulation Technics.....	8
4.3 Emission Bandwidth.....	9
4.4 Power adjustment for antenna gain.....	11
4.5 Conducted Emission.....	13
4.6 Radiated Out of Band Emission.....	16
4.7 Peak transmit power.....	17
4.8 Power spectral density.....	20
4.9 Automatically Discontinued Transmission.....	22
4.10 In-band emissions.....	23
4.11 Out-of-band emissions.....	25
4.12 Carrier frequency stability.....	31
4.13 Frame repetition stability.....	32
4.14 Frame Period and Jitter.....	33
4.15 Monitoring time.....	34
4.16 Monitoring threshold.....	35
4.17 Maximum transmit time.....	36
4.18 System acknowledgement.....	37
4.19 Least Interfered Channel & Channel confirmation.....	39
4.20 Random waiting.....	40
4.21 Monitoring Bandwidth.....	41
4.22 Maximum reaction time.....	44
4.23 Monitoring antenna.....	46
4.24 Duplex Connections.....	48
4.25 Alternative Monitoring Interval for Co-located Device.....	51
V. TEST SET UP.....	52
VI. TEST EQUIPMENTS.....	53

I . GENERAL INFORMATION

1.1 Applicant (Client)

Name	SAMSUNG ELECTRONICS CO., LTD.
Address	416 Maetan3-Dong Yeongtong-gu, Suwon city, Gyeonggi-Do, Korea 443-742
Contact Person	Bae, HagYoun
Telephone No.	+82-31-279-4387
Facsimile No.	+82-31-279-0389
E-mail address	Hagyoun.bae@samsung.com

1.2 Equipment (EUT)

Type of equipment	UPCS Frame
Model Name	SMT-i8110
FCC ID	A3LSMT-I8110
Operating Standard	DECT
Operating Frequency	1921.536 ~ 1928.448 MHz
Type of Modulation	TDMA
Number of channels	5 RF Channels, 5x12=60 TDMA duplex Channels
Type of Modulation	GFSK
Antenna	2 build-in antennas which support Antenna Diversity
Temperature Range	-20 ~ +50 ℃
Manufacturer Name	SAMSUNG ELECTRONICS CO., LTD.
Manufacturer Address	259, Gongdan-Dong, Gumi-City, Gyeongsangbuk-Do, 730-030, Korea

1.3 Testing Laboratory

Testing Place	Korea Testing Labortory (KTL) 516 Hae-an-ro, Sa-dong, Sangnok-gu, Ansan-si, Gyeonggi-do, 426-901, KOREA
Test Engineer	Sungkyu Cho
Telephone number	+82 31 500 0312
Facsimile number	+82 31 500 0159
E-mail address	skcho@ktl.re.kr
Other Comments	

1.4 Technical specifications

Frequency Band	1920 ~ 1930 MHz
Frame Period	10 ms
Time Slot Length	416.67 us
Slots	12 RX, 12 TX slots
Slot Structure	6 active duplex pairs per frame
Bit Rate	1.152 Mbit
Number of channels	5 RF Channels, 5x12=60 TDMA duplex Channels

Frequency Channel	Frequency
Channel 1	1921.536 MHz
Channel 2	1923.264 MHz
Channel 3	1924.992 MHz
Channel 4	1926.720 MHz
Channel 5	1928.448 MHz

II. SUMMARY OF TEST RESULTS

Testing performed for : SAMSUNG ELECTRONICS CO., LTD.

Equipment Under Test : SMT-i8110

Receipt of Test Sample : January 14, 2008

Test Start Date : January 18, 2008

Test End Date : February 19, 2008

The following table represents the list of measurements required under the FCC CFR47 Part 15 Subpart D.

Name of Test	FCC Part	Test Procedure ANSIC63.17	Verdict
Antenna Requirements	15.317, 15.203	Declaration	Attestation
Digital Modulation Techniques	15.319(b)	6.1.4	Attestation
Emission Bandwidth	15.323(a)	6.1.3	Complies
Power adjustment for antenna gain	15.319(e)	4	Complies
Conducted Emission	15.207(a)	ANSI C63.4	Complies
Radiated Out of Band Emission	15.209(a)	ANSI C63.4	Attestation
Peak transmit power	15.319(c)(e)	6.1.2	Complies
Power spectral density	15.319(d)	6.1.5	Complies
Automatically discontinue transmission	15.319(f)	--	Complies
In-band emissions	15.323(d)	6.1.6.1	Complies
Out-of-band emission	15.323(d)	6.1.6.2	Complies
Carrier frequency stability	15.323(f)	6.2.1	Complies
Frame repetition stability	15.323(e)	6.2.2	Complies
Frame period and jitter	15.323(e)	6.2.3	Complies
Monitoring time	15.323(c)(1)	7.3.4	Complies
Monitoring threshold	15.323(c)(2)	7.3.1	Complies
Maximum transmit time	15.323(c)(3)	8.2.2	Complies
System acknowledgement	15.323(c)(4)	8.1.1 & 8.2.1	Complies
Least Interfered Channel	15.323(c)(5)	7.3.2, 7.3.3	Complies

Name of Test	FCC Part	Test Procedure ANSIC63.17	Verdict
Random waiting	15.323(c)(6)	8.1.3	Attestation
Monitoring Bandwidth	15.323(c)(7)	7.4	Complies
Maximum reaction time	15.323(c)(7)	7.5	Complies
Monitoring antenna	15.323(c)(8)	4	Attestation
Duplex Connections	15.323(c)(10)	8.3	Complies
Alternative Monitoring Interval for Co-located Device	15.323(c)(11)	8.4	Complies

Note 1 : Test results reported in this document relate only to the items tested

Note 2 : The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

Note 3 : Test results apply only to the item(s) tested

*** Modifications required for compliance**

No modifications were implemented by KTL.

All results in this report pertain to the un-modified sample provided to KTL.

III. TEST FACILITY

3.1 Korea Testing Laboratory test location

All tests were conducted at Korea Testing Laboratory. The site address is 516 Hae-an-ro, Sa-dong, Sangnok-gu, Ansan-si, Gyeonggi-do, 426-901, KOREA. The radiated emission test site is a 10-meter semi-anechoic chamber. The chamber meets the characteristics of CISPR 16-1:1993 and ANSI C63.4: 1992. For measurements, a remotely controlled flush-mount metal-top turntable is used to rotate the EUT a full 360 degrees. A remote controlled non-conductive antenna mast is used to scan the antenna height from one to four meters.



The FCC registration number is 408324. The Industry Canada filing number for this site is 6298.

IV. TEST RESULTS

4.1 Antenna Requirements

4.1.1 Requirement

EUT must meet the antenna requirement of FCC Rule 15.203

- ☒ EUT uses a permanently attached antenna which is considered sufficient to comply with the provisions of this rule.
- ☐ EUT uses a unique antenna jack or electrical connector which is considered sufficient to comply with the provisions of this rule.

4.1.2 Attestation

The EUT uses 2 permanently attached antennas.



4.2 Digital Modulation Technics

4.2.1 Requirement

All transmissions must use only digital modulation techniques.

4.1.2 Attestation

The tested equipment is based on DECT technology described in the ETSI EN 300 175, the only difference is that the channel allocation is modified to operate in the 1920-1930 MHz band.

4.3 Emission Bandwidth

4.3.1 FCC rule - FCC 15.323(a)

(a) Operation shall be contained within the 1920-1930 MHz band. The emission bandwidth shall be less than 2.5 MHz. The power level shall be as specified in § 15.319(c), but in no event shall the emission bandwidth be less than 50 kHz.


4.3.2 Test Procedure - ANSI C63.17 sub-clause 6.1.3.

4.3.3 Test Results


Channel	Result (MHz)	Limit (MHz)	Verdict
1	1.458	2.5	Complies
2	1.458	2.5	Complies
3	1.450	2.5	Complies



- Emission Bandwidth of Ch 1 -

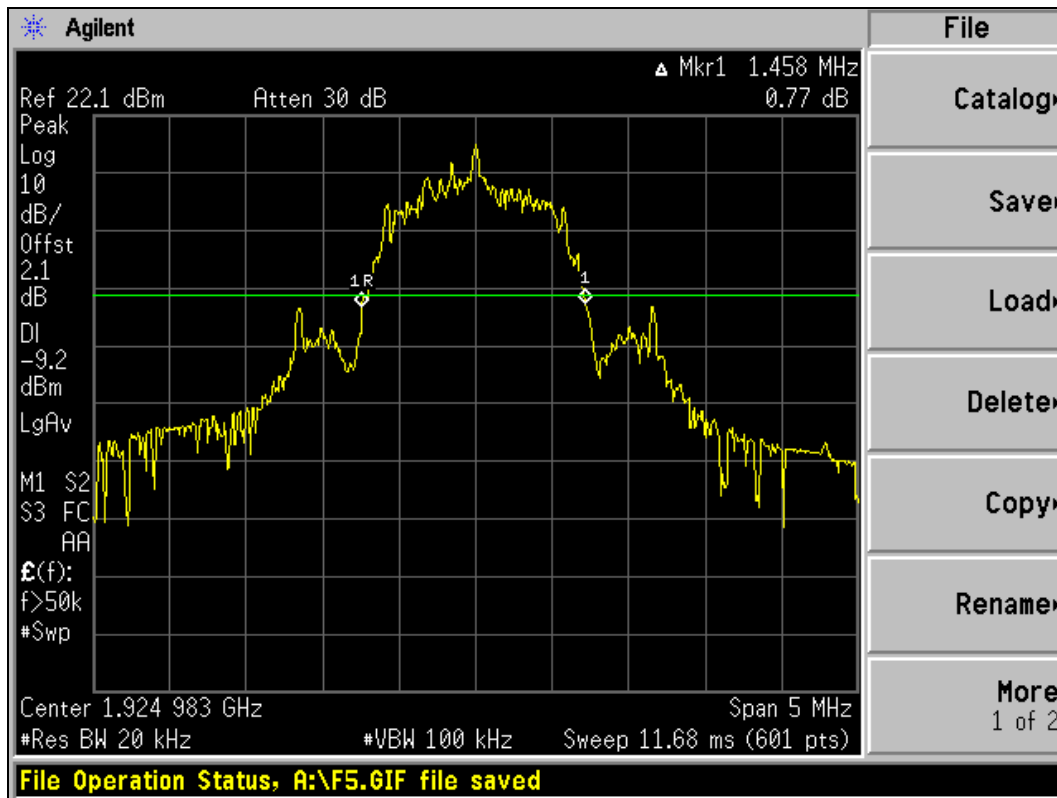

- Emission Bandwidth of Ch 3 -

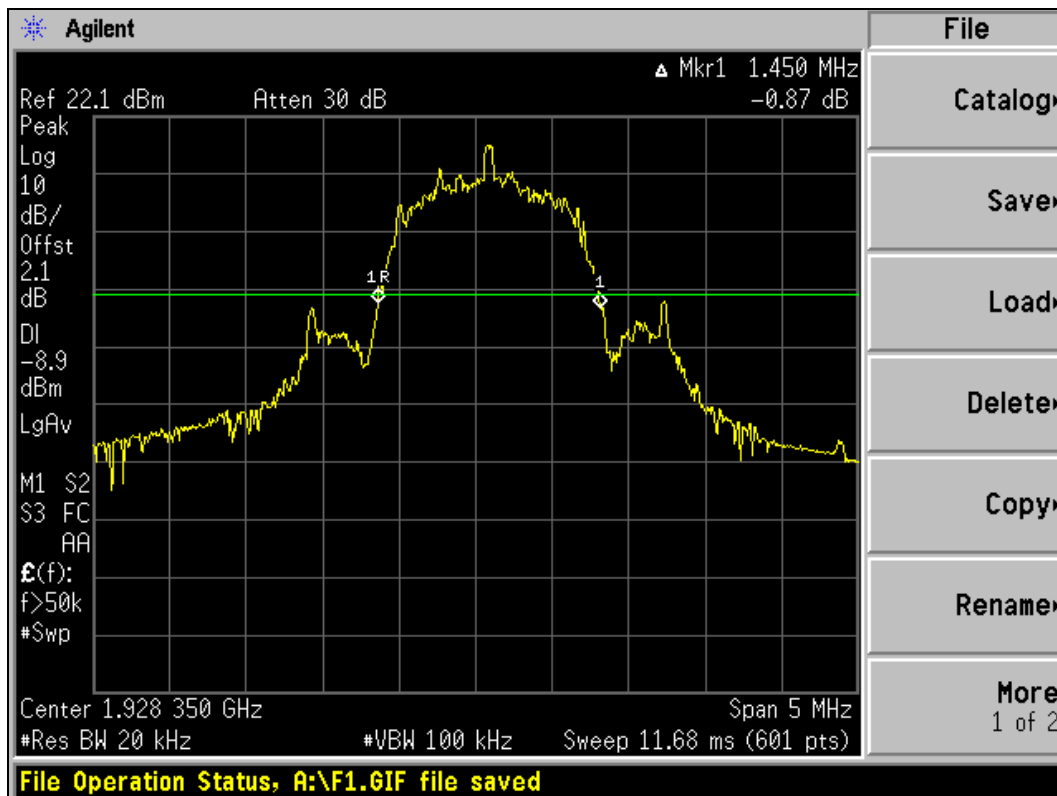

- Emission Bandwidth of Ch 5 -

4.4 Power adjustment for antenna gain


4.4.1 Test limit - FCC 15.319(e)

(e) The peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.


4.4.2 Test results

The maximum antenna gain is lower than 3 dBi


Azimuth Pattern

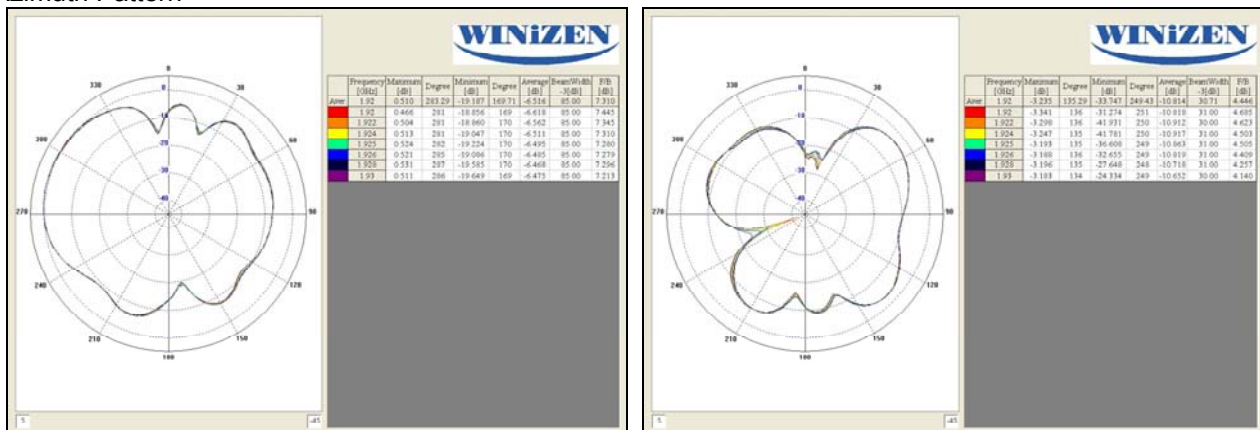

Elevation Pattern

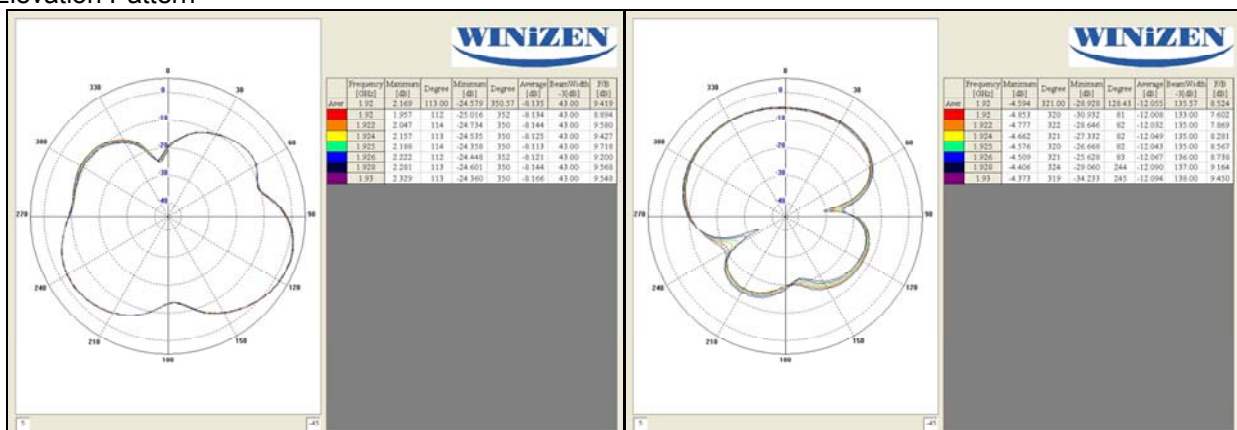

Elevation Side Pattern

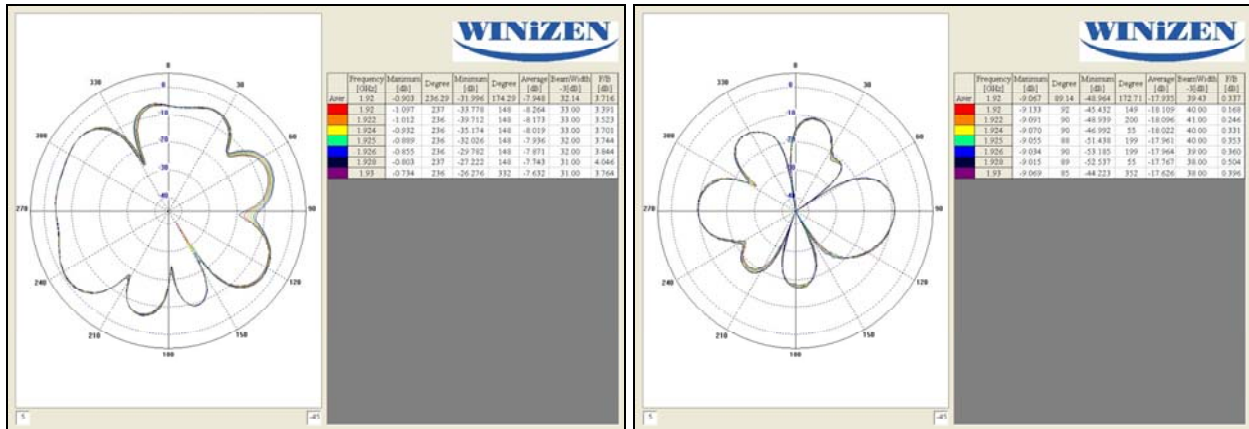

4.5 Conducted Emissions (FCC Part 15.207)

4.5.1 Test Procedure

Conducted emission measurements on the EUT were performed by "AC Power Line Conducted Emissions Testing" procedure as per ANSI C63.4. The EUT was set up on a wooden table 0.8 meters height, 1.0 by 1.5 meters in size, placed in the shielded enclosed with a side of wall of which constituted a vertical conducting surface of 2.2 m x 3.1 m in size to maintain 40 cm from the rear of EUT

LISN(Line Impedance Stabilization Network, ROHDE & SCHWARZ, ESH3-Z5, 50 ohm / 50 μ H) was installed and electrically boned to the conducting ground plane. The EUT was connected to the LISN using a typical power adapter.

One of two 50 ohm output terminals of the LISN was connected to the EMI Receiver (ROHDE & SCHWARZ, ESCI, 9 kHz to 3 GHz) and the other was terminated in 50 ohms. Measurements were again performed after interchanging such a connection oppositely.

The frequency range from 150 kHz to 30 MHz was examined and the remarkable frequencies were measured with Quasi-peak and Average values using the EMI receiver instrument (ROHDE & SCHWARZ, ESI, 9 kHz to 3 GHz ; Detector Function ; CISPR Quasi-Peak & Average). The 6 dB bandwidth of the Receiver was set to 9 kHz

The position of connecting cables of the EUT was changed to find the worst case configuration during measurements. The maximum emission level from the EUT occurred in such configuration as shown in the following photograph.

4.5.2 Limits

- (a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency (MHz)	Conducted Limits (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

4.5.3 Sample calculation


The emission level measured in decibels above one microvolt ($\text{dB}_{\mu\text{V}}$) was converted into microvolt (μV) as shown in following sample calculation.

For example :

Measured Value at 0.60 MHz	39.4 $\text{dB}_{\mu\text{V}}$ @ Q-Peak mode
+ Correct factor *	9.7 dB
= Conducted Emission	49.1 $\text{dB}_{\mu\text{V}}$


* Correct factor is adding RF cable loss and Attenuation.

4.5.4 Photograph for the test configuration

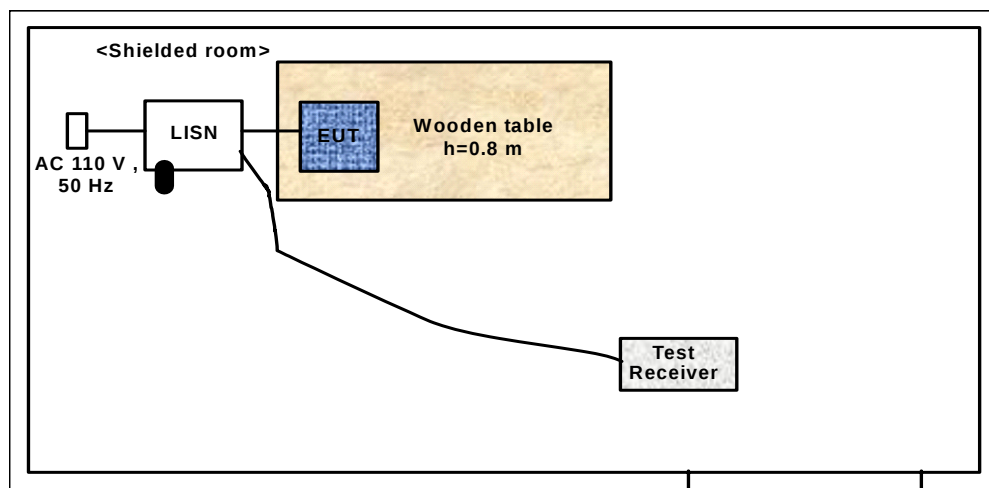

4.5.5 Test Results

Test mode : UPCS connection mode

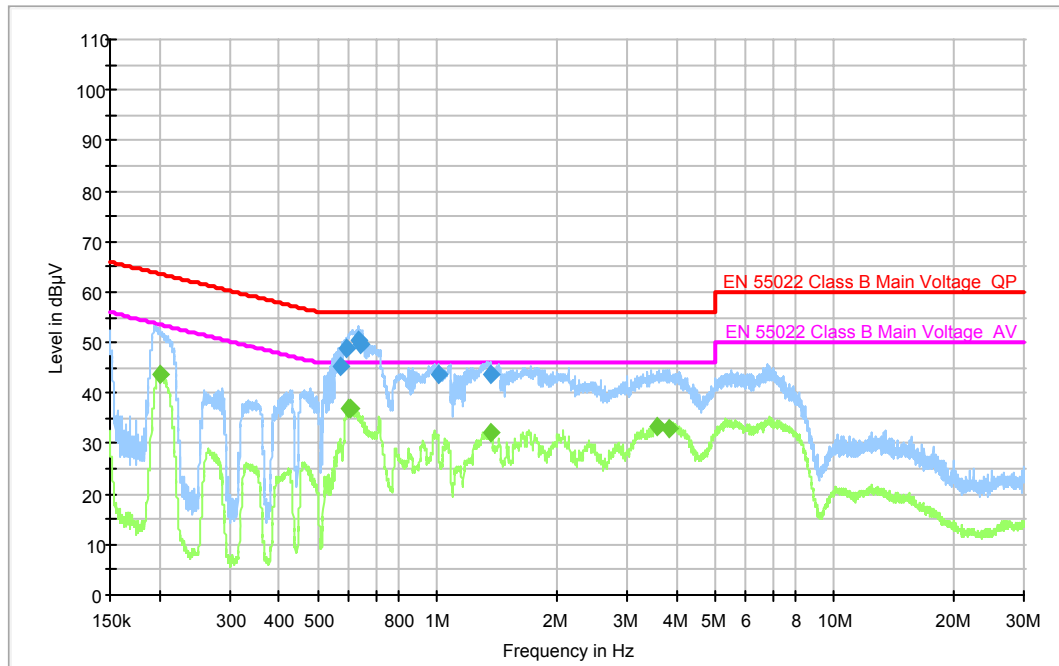

Final Measurement - QuasiPeak

Frequency (MHz)	QuasiPeak (dBμ V)	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)
0.573250	45.3	N	9.9	10.7	56.0
0.587795	48.9	N	9.9	7.1	56.0
0.631888	50.3	L1	9.8	5.7	56.0
0.638331	49.7	L1	9.8	6.3	56.0
1.002801	43.8	N	10.0	12.2	56.0
1.363144	43.6	N	9.9	12.4	56.0

Final Measurement - Average

Frequency (MHz)	Average (dBμ V)	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)
0.200871	43.8	N	9.8	9.8	53.6
0.600187	36.7	N	9.9	9.3	46.0
0.601590	36.8	N	9.9	9.2	46.0
1.361519	32.4	N	9.9	13.6	46.0
3.585377	33.5	N	9.9	12.5	46.0
3.852169	32.9	L1	9.8	13.1	46.0

4.6 Radiated Out of Band Emission (FCC Part 15.209)

4.6.1. Test procedure – FCC Part 15.209

4.6.2 Test result

Not tested.

This test is not required if the Out-of-Band Emissions is tested Conducted and is Pass.

4.7 Peak transmit power

4.7.1 Test limit - FCC 15.319(c)

- (c) Peak transmit power shall not exceed 100 microwatts multiplied by the square root of the emission bandwidth in hertz. Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

Calculation of Peak transmit power Limit:

The antenna gain < 3 dBi

The measured emission bandwidth = 1.46 MHz


Limit : $5 \log B(\text{bandwidth in Hz}) - 10 \text{ dBm} = 20.8 \text{ dBm}$

The Maximum allowed peak transmit power is 20.8 dBm


4.7.2 Test procedure - ANSI C63.17 sub-clause 6.1.2.

4.7.3 Test results


Channel	Result (dBm)	Limit (dBm)	Verdict
1	19.67	20.8	Complies
3	19.54	20.8	Complies
5	19.58	20.8	Complies

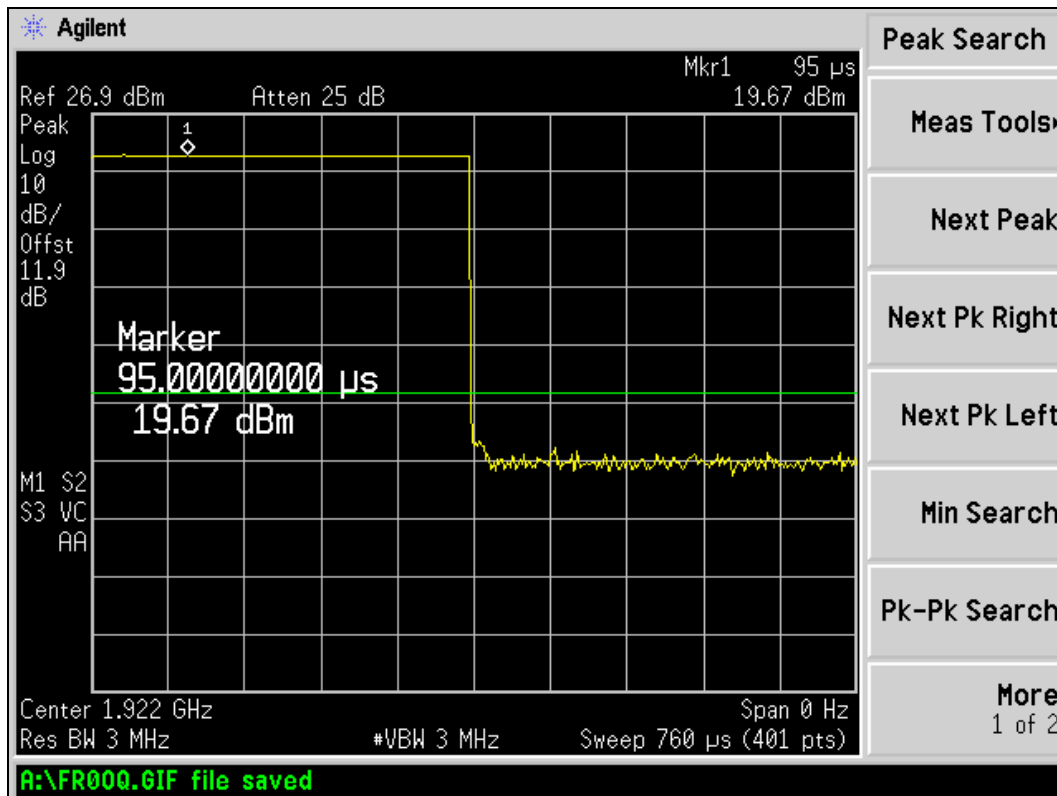

- Peak transmit power of Ch 1 -

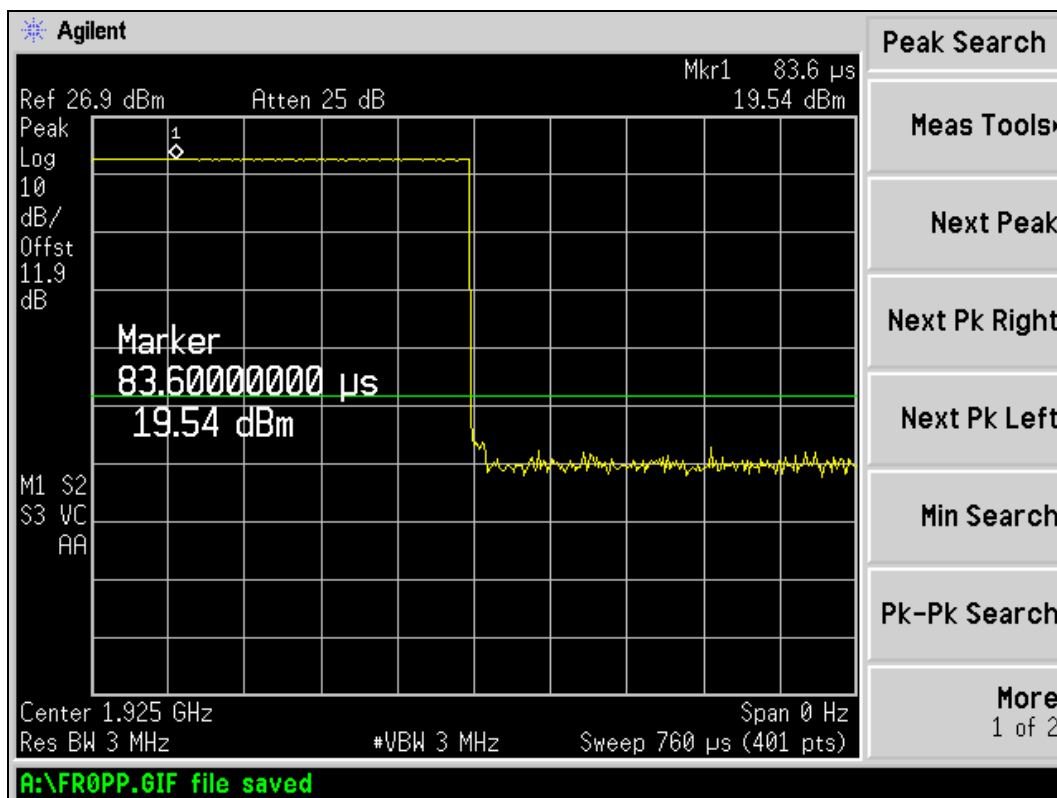

- Peak transmit power of Ch 3 -

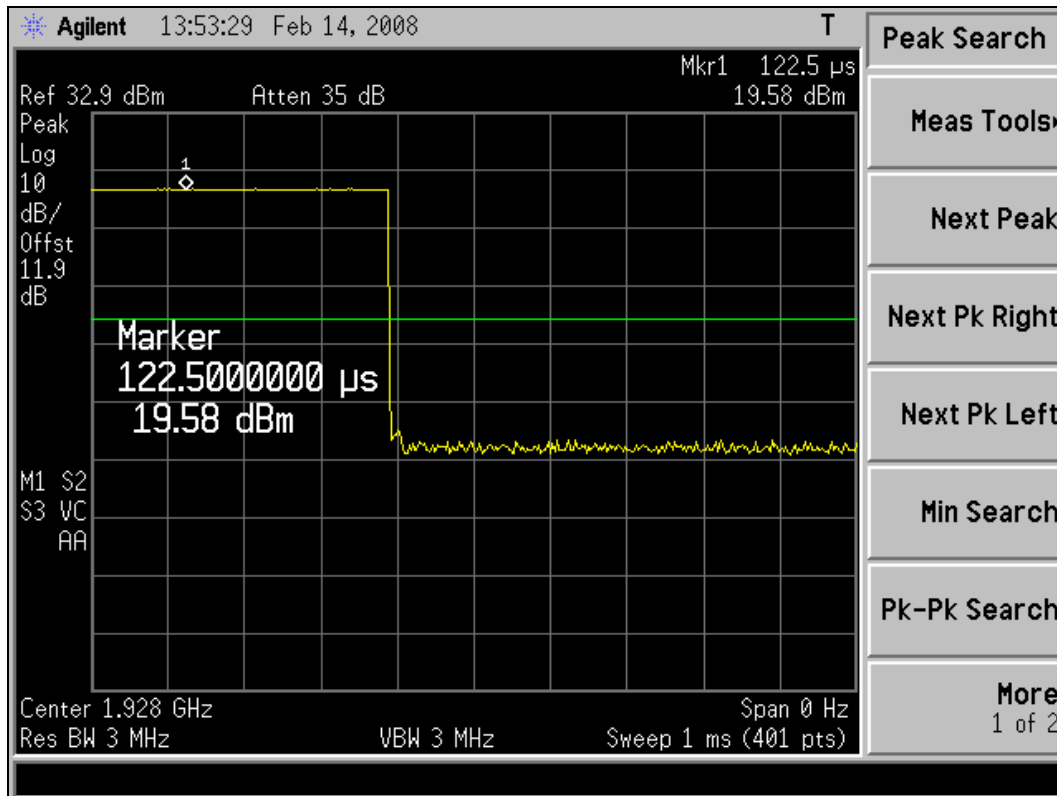

– Peak transmit power of Ch 5 –

4.8 Power spectral density


4.8.1 Test limit - FCC 15.319(c)

(d) Power spectral density shall not exceed 3 milliwatts in any 3 kHz bandwidth as measured with a spectrum analyzer having a resolution bandwidth of 3 kHz.


4.8.2 Test procedure - ANSI C63.17 sub-clause 6.1.5.

4.8.3 Test results


Channel	Result (mW)	Limit (mW)	Verdict
1	0.920	3	Complies
3	1.361	3	Complies
5	0.877	3	Complies

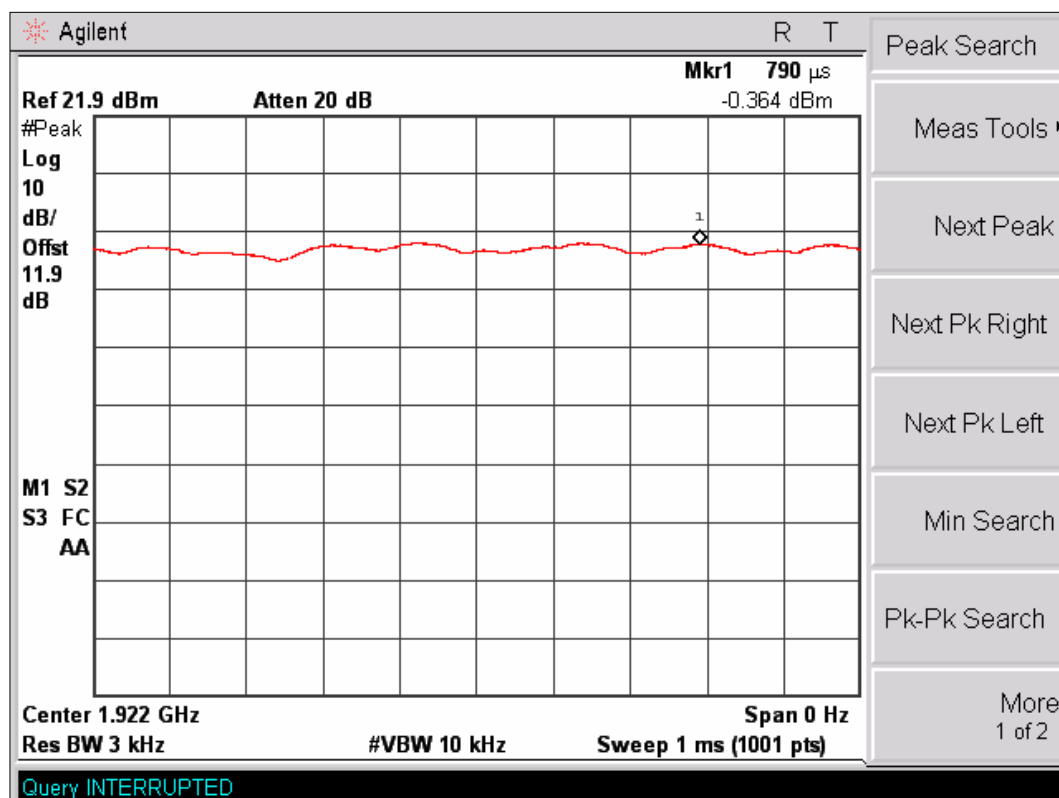

– Power spectral density of Ch 1 –

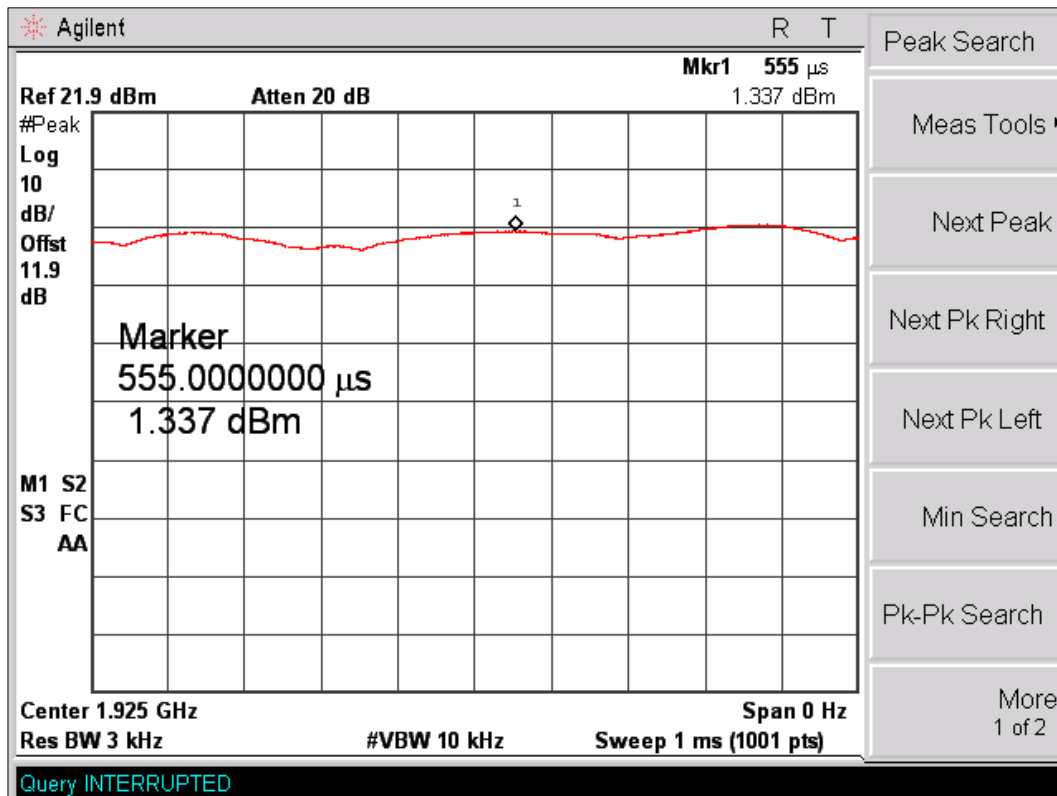

- Power spectral density of Ch 3 -

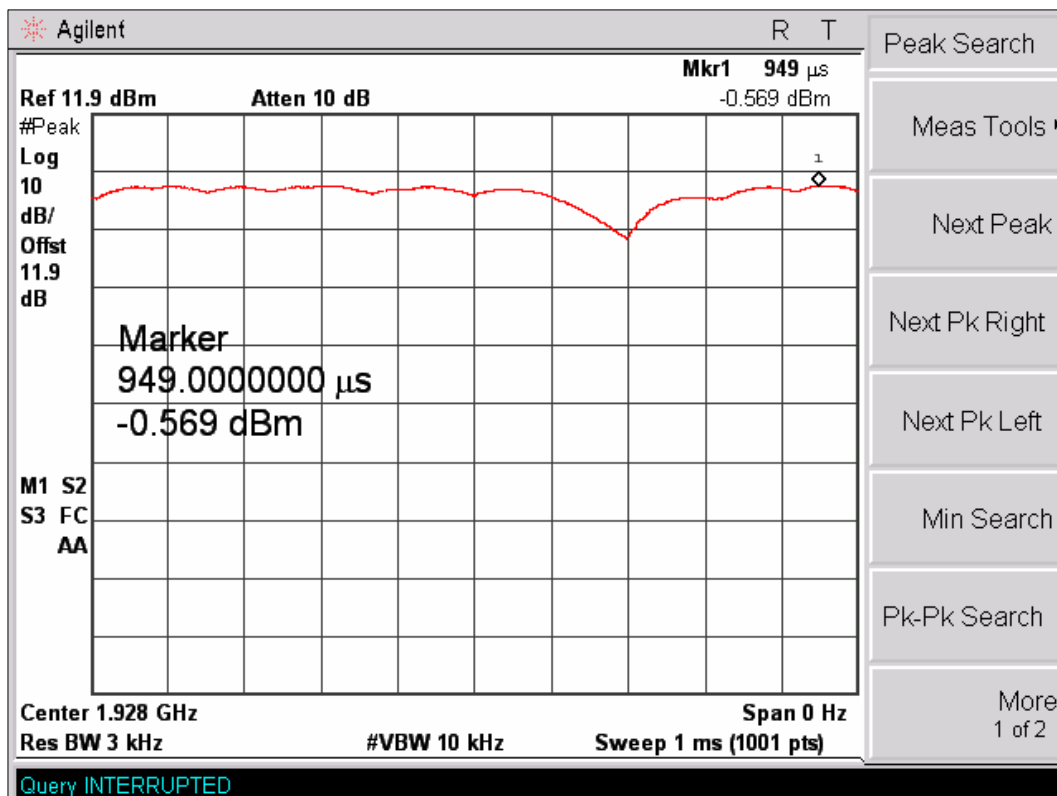

- Power spectral density of Ch 5 -

4.9 Automatically Discontinued Transmission

4.9.1 Test limit - FCC 15.319(f)

- (f) The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude transmission of control and signaling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

4.9.2 Test procedure

The following tests simulate the reaction of the EUT in case of either absence of information to transmit or operational failure after a connection with the companion devices is established.

	Test	EUT Reaction	Verdict
1	Power removed from the EUT	A/B/C	Pass/Fail
2	EUT Switch Off	A/B/C	Pass/Fail
3	Hook-On by companion device	A/B/C	Pass/Fail
4	Hook-On by EUT	A/B/C	Pass/Fail
5	Power Removed from Companion Device	A/B/C	Pass/Fail
6	Companion Device Switch Off	A/B/C	Pass/Fail

A – Connection breakdown, Cease of all transmissions

B – Connection breakdown, EUT transmits control and signaling information

C – Connection breakdown, Companion Device transmits control and signaling information

NA – Not applicable

4.9.3 Test results

	Test	EUT Reaction	Verdict
1	Power removed from the EUT	C	Pass
2	EUT Switch Off	C	Pass
3	Hook-On by companion device	NA	Pass
4	Hook-On by EUT	C	Pass
5	Power Removed from Companion Device	A	Pass
6	Companion Device Switch Off	NA	Pass


4.10 In-band emissions

4.10.1 Test limit - FCC 15.319(d)(2)


- (d) Emissions outside the sub-band shall be attenuated below a reference power of 112 milliwatts as follows: 30 dB between the sub-band and 1.25 MHz above or below the sub-band; 50 dB between 1.25 and 2.5 MHz above or below the sub-band; and 60 dB at 2.5 MHz or greater above or below the subband. Emissions inside the sub-band must comply with the following emission mask: In the bands between 1B and 2B measured from the center of the emission bandwidth the total power emitted by the device shall be at least 30 dB below the transmit power permitted for that device; in the bands between 2B and 3B measured from the center of the emission bandwidth the total power emitted by an intentional radiator shall be at least 50 dB below the transmit power permitted for that radiator; in the bands between 3B and the sub-band edge the total power emitted by an intentional radiator in the measurement bandwidth shall be at least 60 dB below the transmit power permitted for that radiator. "B" is defined as the emission bandwidth of the device in hertz. Compliance with the emission limits is based on the use of measurement instrumentation employing peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

4.10.2 Test procedure - ANSI C63.17 sub-clause 6.1.6.1.


4.10.3 Test results

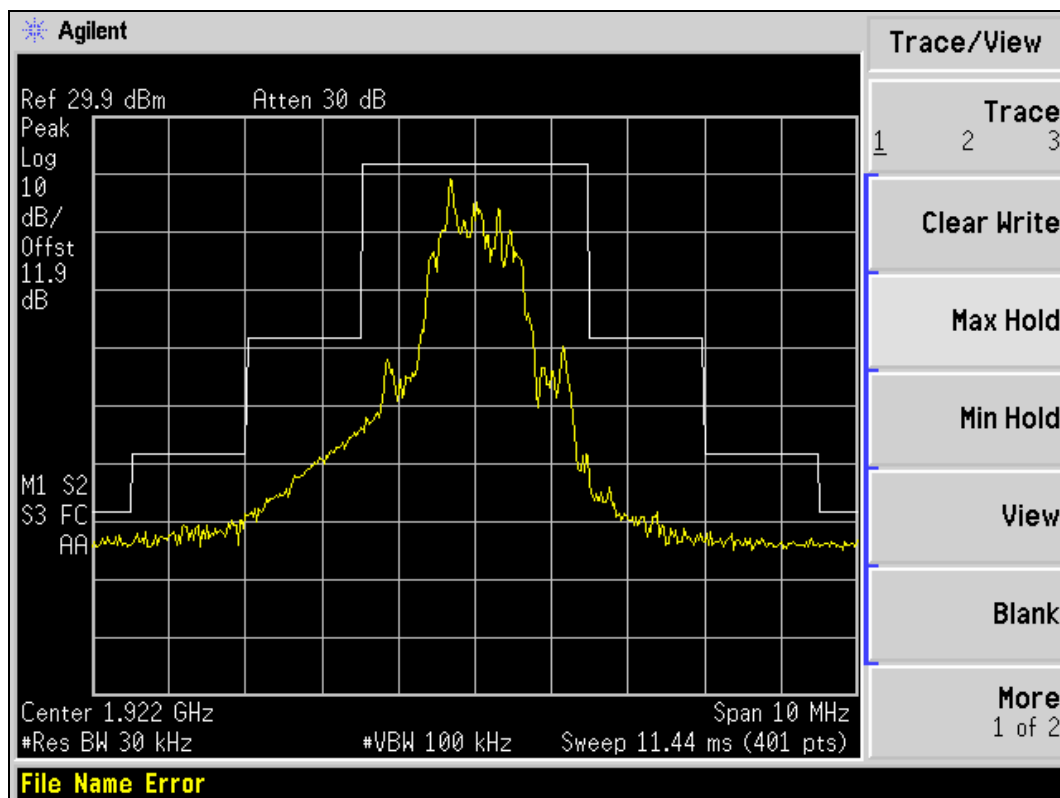

– In-band emission of Ch 1 –

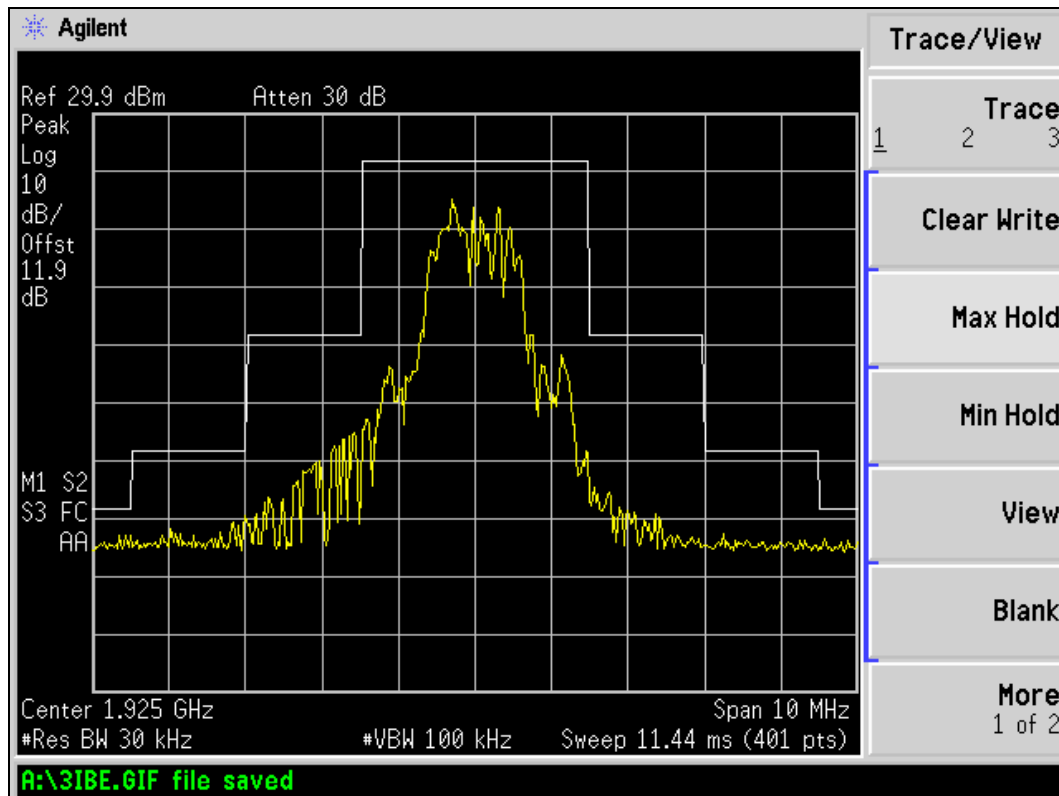

– In-band emission of Ch 3 –

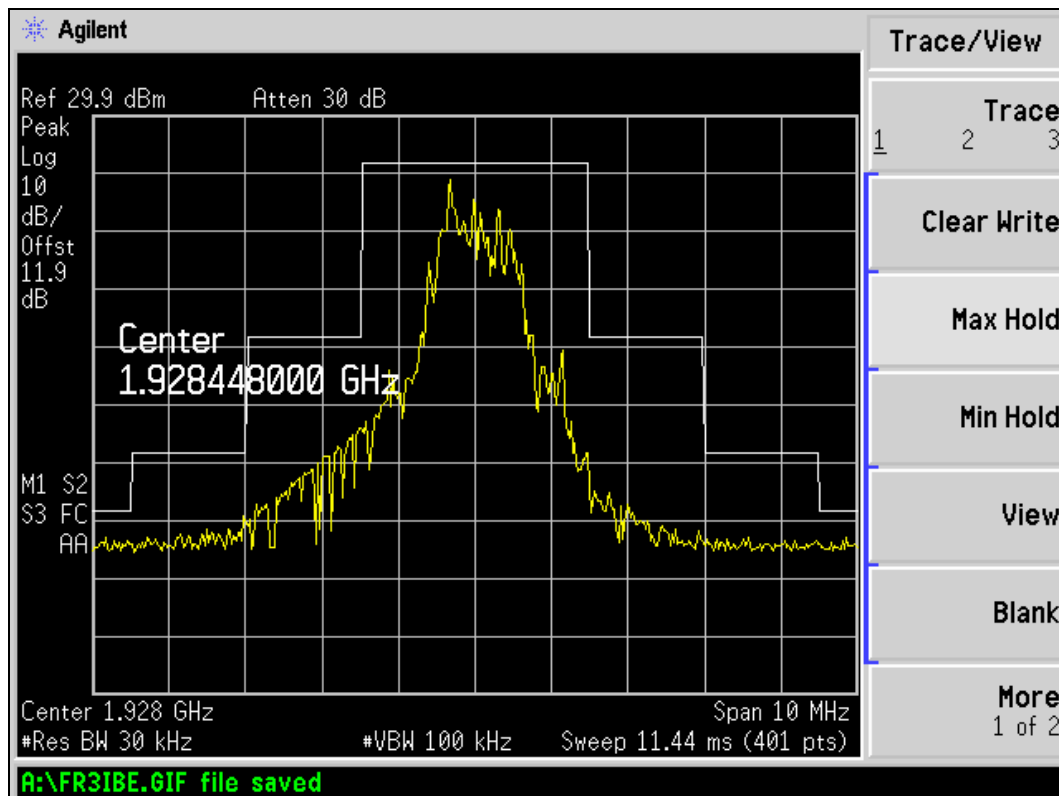

– In-band emission of Ch 5 –


4.11 Out-of-band emissions

4.11.1 Test limit - FCC 15.319(d)(2)


- (d) Emissions outside the sub-band shall be attenuated below a reference power of 112 milliwatts as follows: 30 dB between the sub-band and 1.25 MHz above or below the sub-band; 50 dB between 1.25 and 2.5 MHz above or below the sub-band; and 60 dB at 2.5 MHz or greater above or below the subband. Emissions inside the sub-band must comply with the following emission mask: In the bands between 1B and 2B measured from the center of the emission bandwidth the total power emitted by the device shall be at least 30 dB below the transmit power permitted for that device; in the bands between 2B and 3B measured from the center of the emission bandwidth the total power emitted by an intentional radiator shall be at least 50 dB below the transmit power permitted for that radiator; in the bands between 3B and the sub-band edge the total power emitted by an intentional radiator in the measurement bandwidth shall be at least 60 dB below the transmit power permitted for that radiator. "B" is defined as the emission bandwidth of the device in hertz. Compliance with the emission limits is based on the use of measurement instrumentation employing peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

4.11.2 Test procedure - ANSI C63.17 sub-clause 6.1.6.2.


4.11.3 Test results

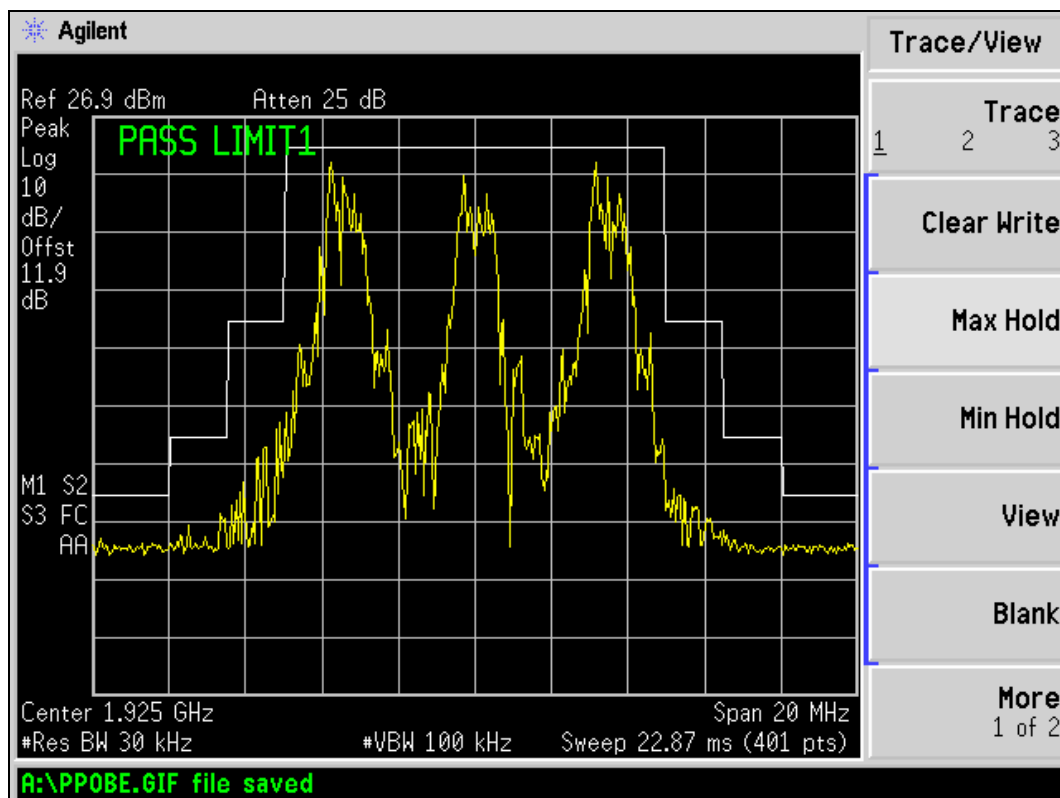


– Out-of-band emission –

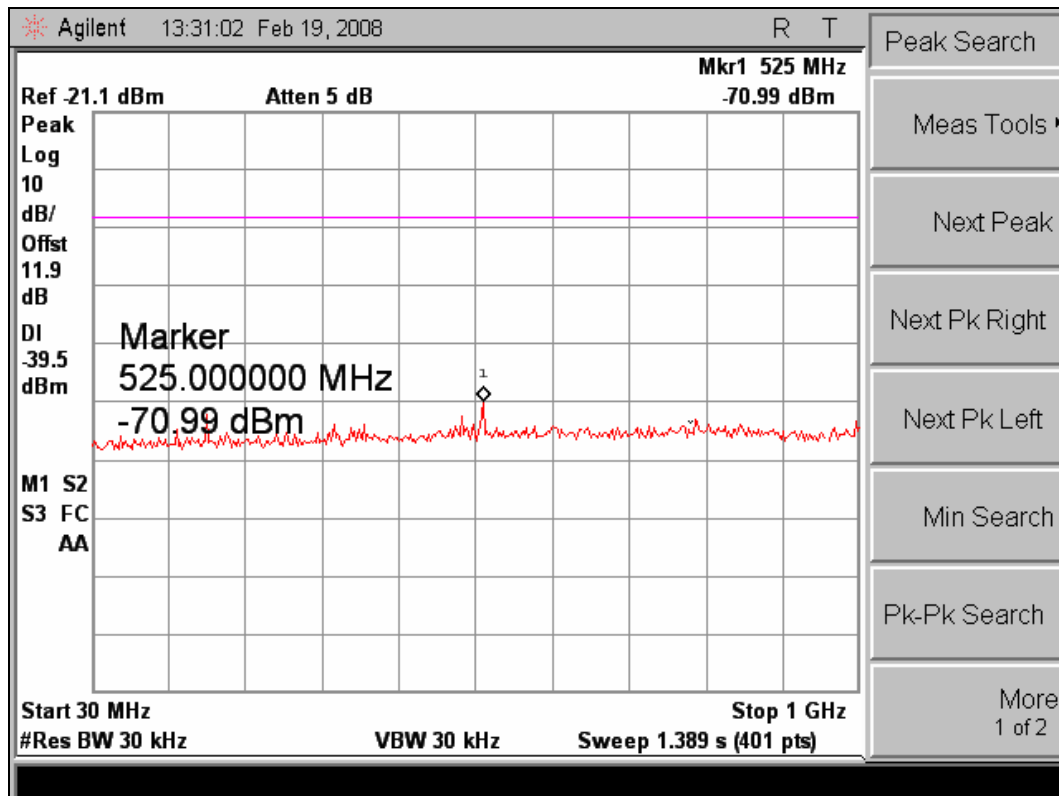


- Out-of-band emission of ch1 -

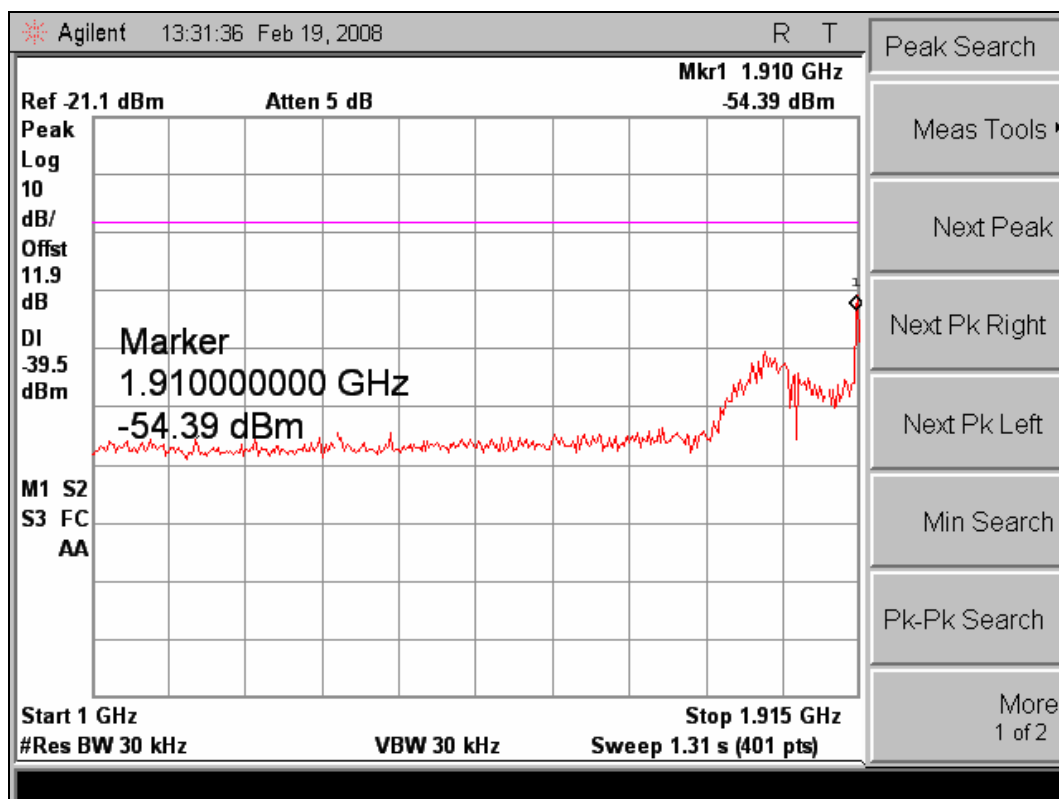


- Out-of-band emission of ch1 -

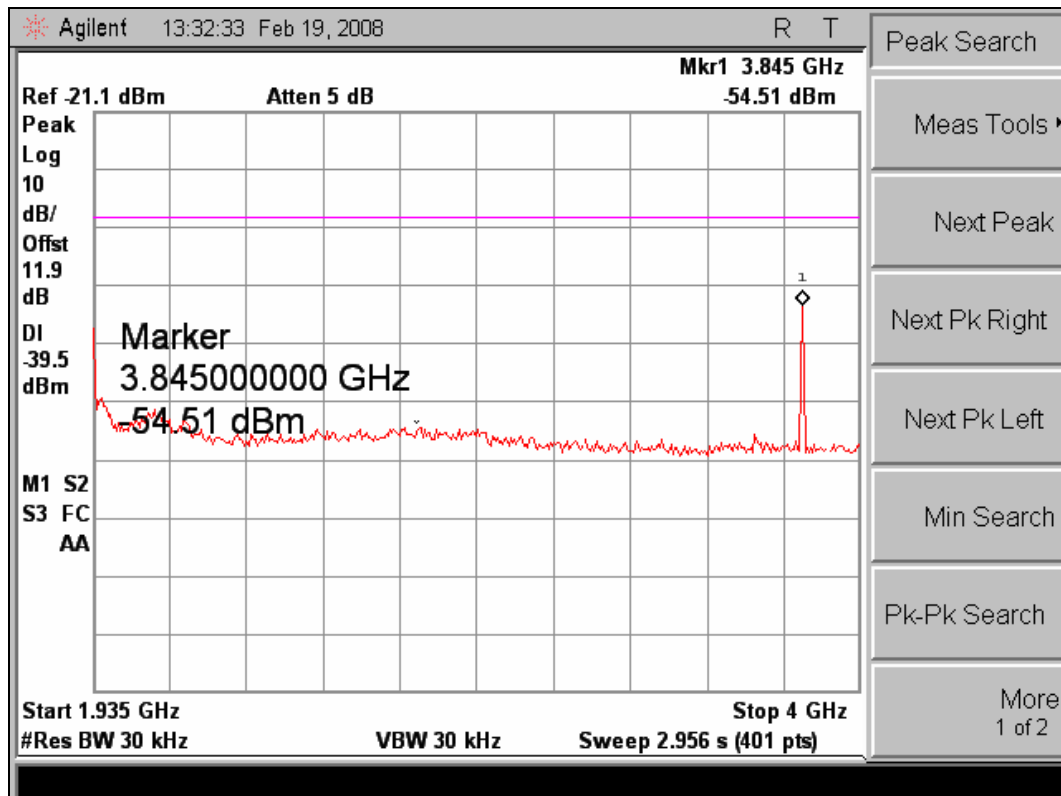


- Out-of-band emission of ch1 -

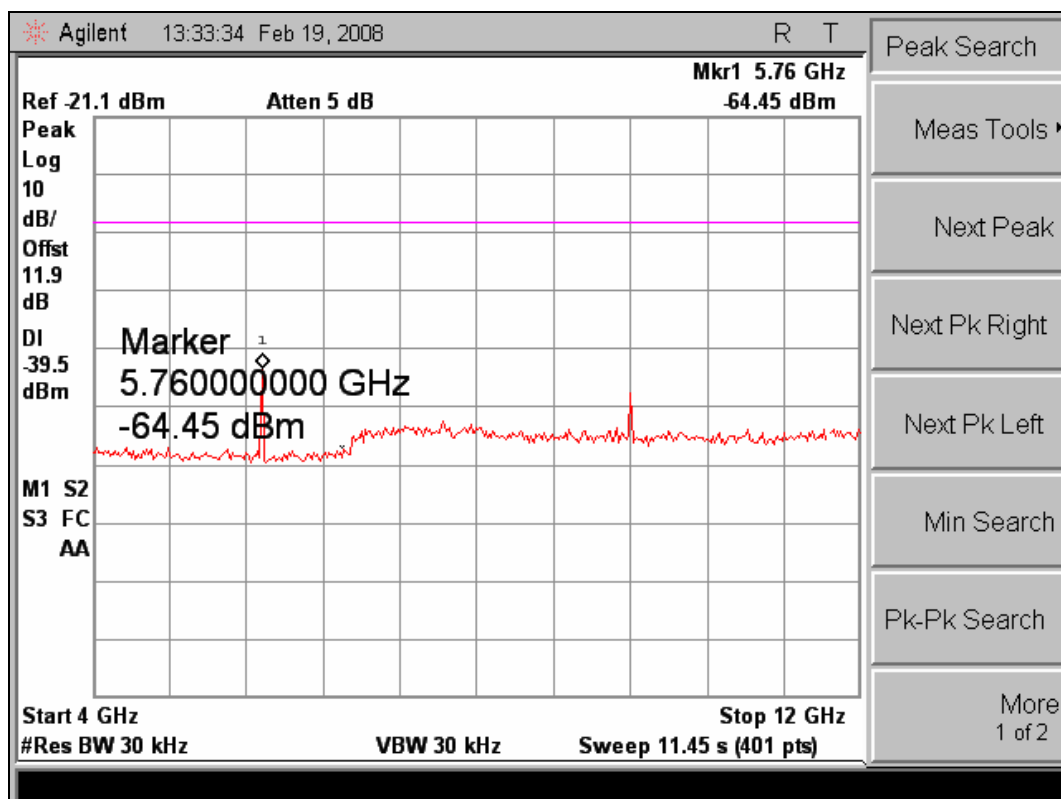


- Out-of-band emission of ch1 -

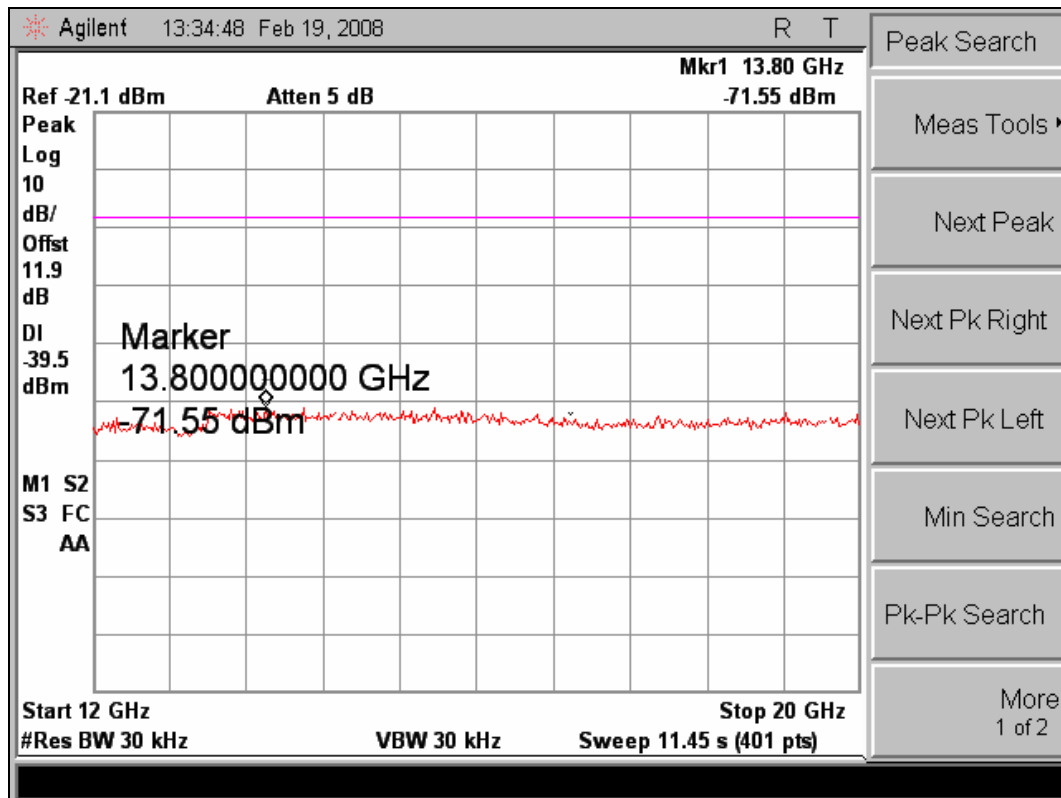


– Out-of-band emission of ch1 –

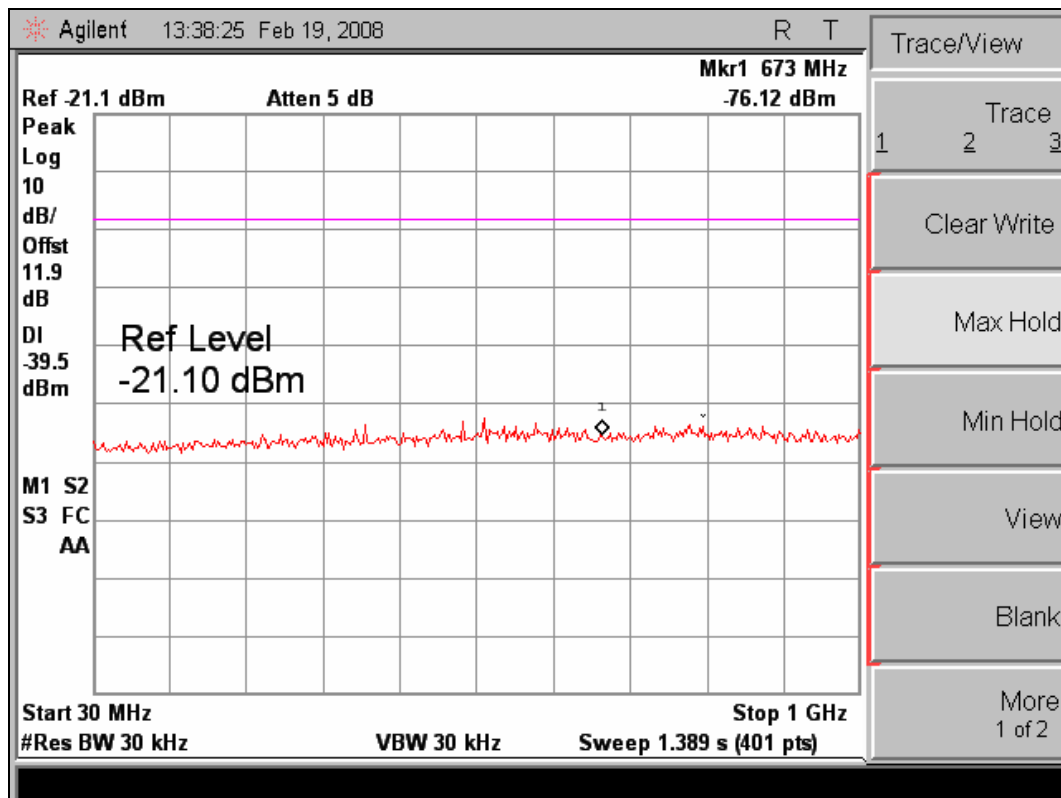


– Out-of-band emission of ch5 –

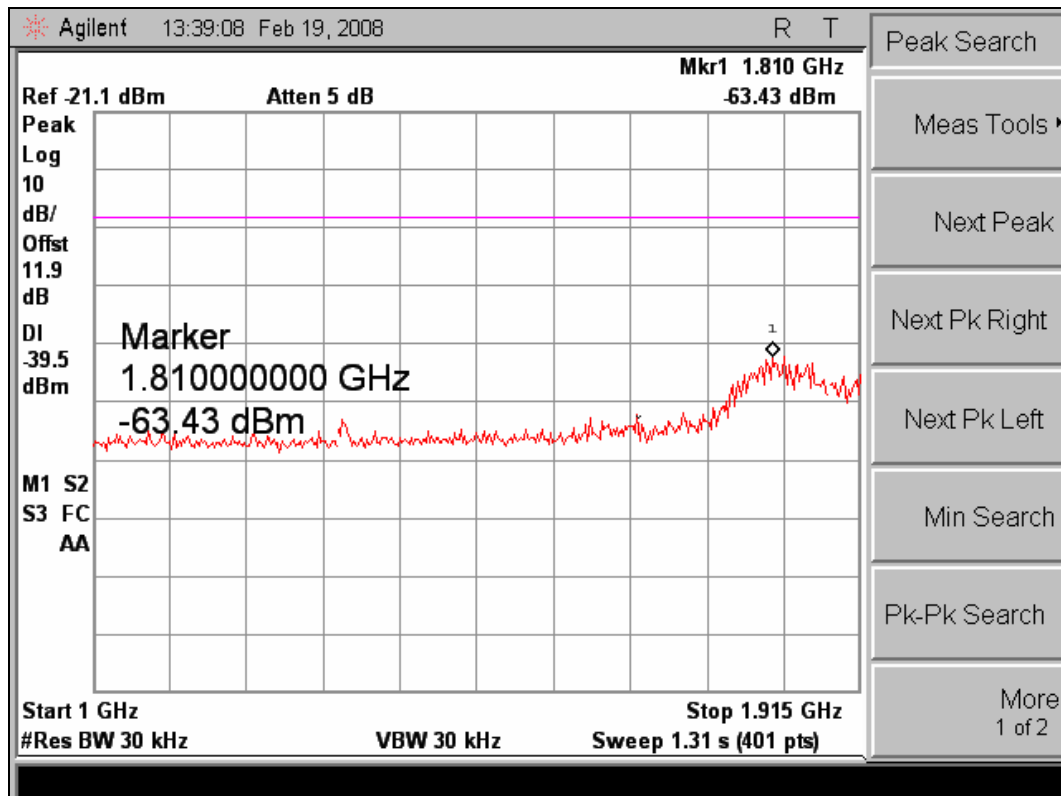


– Out-of-band emission of ch5 –

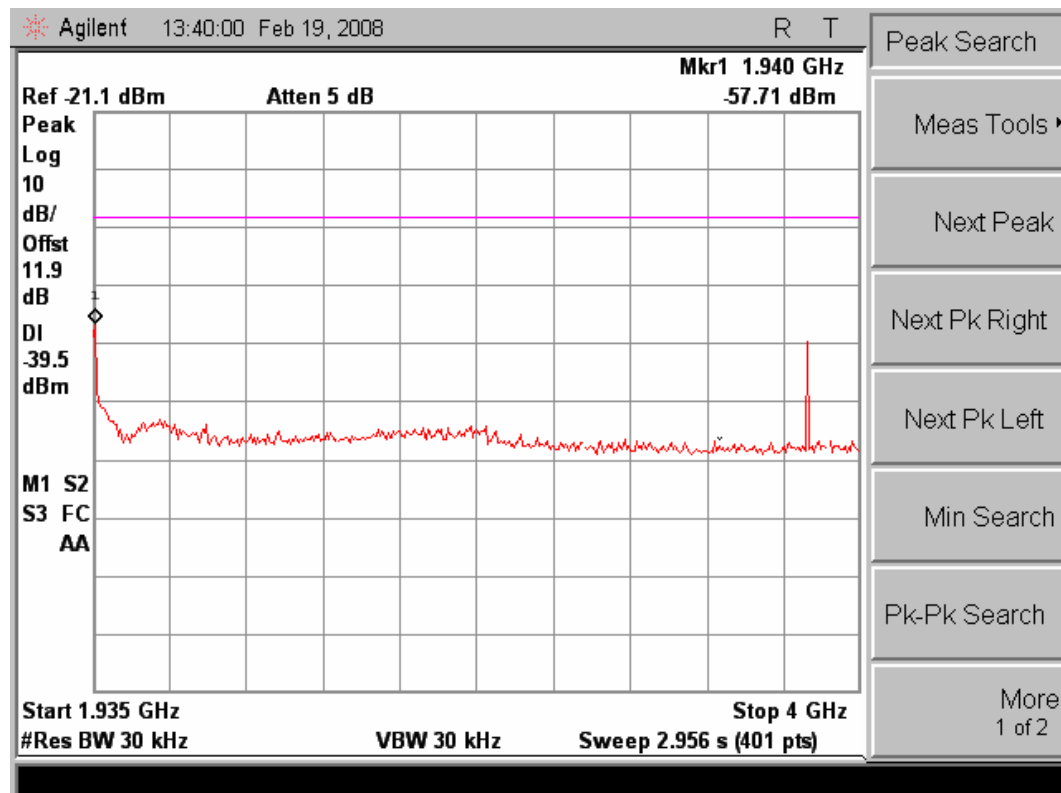

– Out-of-band emission of ch5 –

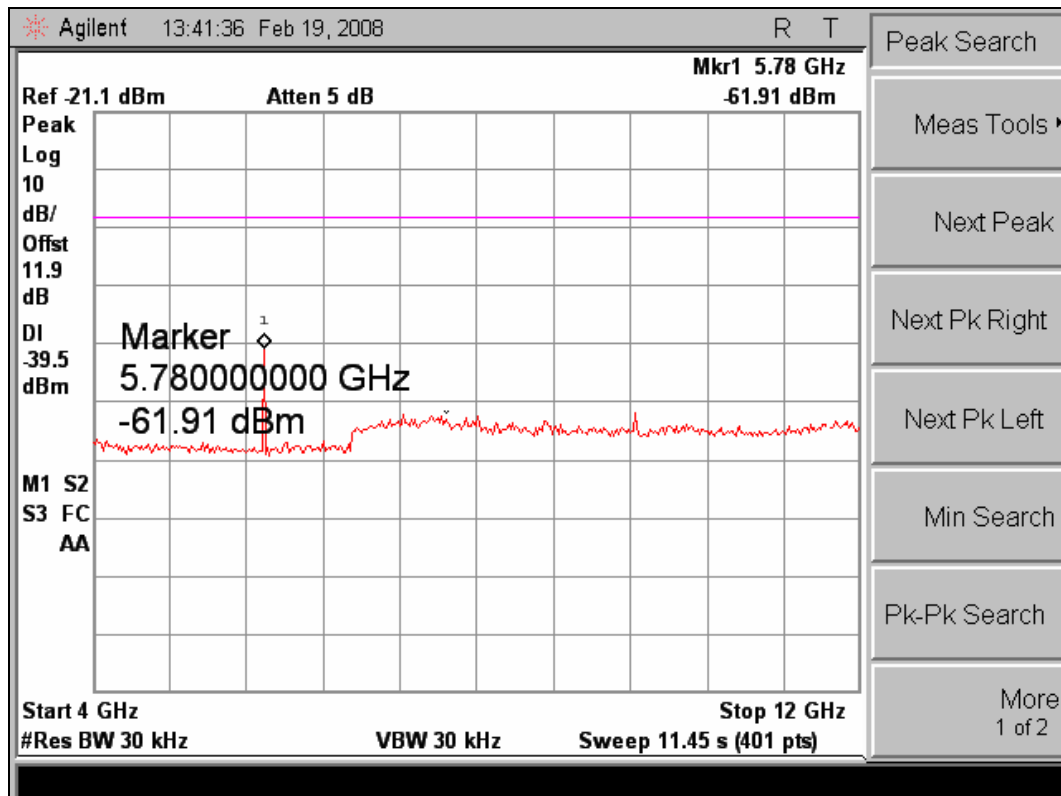

- Out-of-band emission of ch5 -

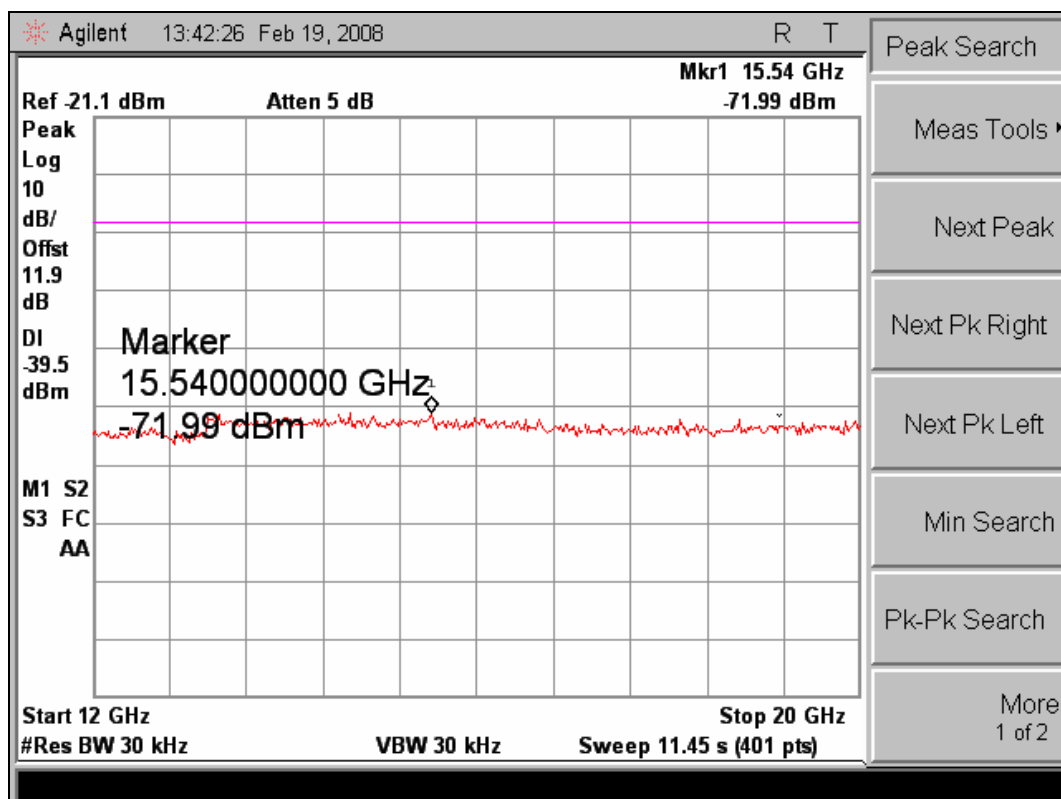

- Out-of-band emission of ch5 -

4.12 Carrier frequency stability

4.12.1 Test limit - FCC 15.319(f)

(f) The frequency stability of the carrier frequency of the intentional radiator shall be maintained within ± 10 ppm over 1 hour or the interval between channel access monitoring, whichever is shorter. The frequency stability shall be maintained over a temperature variation of -20o to +50 degrees C at normal supply voltage, and over a variation in the primary supply voltage of 85 percent to 115 percent of the rated supply voltage at a temperature of 20o C. For equipment that is capable only of operating from a battery, the frequency stability tests shall be performed using a new battery without any further requirement to vary supply voltage.

4.12.2 Test procedure - ANSI C63.17 sub-clause 6.1.2.

4.12.3 Test results

I . Carrier Frequency Stability over time

Supply Voltage	Temperature (°C)	Peak to Peak Diff (kHz)	Max Dev.(ppm)	Limit (ppm)	Verdict
V _{nom}	+23	15	3.89	± 10	Complies

II . Carrier Frequency Stability over Power Supply Voltage

* This test does not apply for EUT that is powered from battery.

Supply Voltage	Temperature (°C)	Measured Frequency Offset Over an hour (ppm)	Limit (ppm)	Verdict
85 %	+23	N/A	± 10	N/A
115%	+23	N/A	± 10	N/A

III. Carrier Frequency Stability over Temperature

Supply Voltage	Temperature (°C)	Measured Frequency Offset Over an hour (ppm)	Limit (ppm)	Verdict
Nominal	-20	6.14	± 10	Complies
Nominal	+50	7.10	± 10	Complies

4.13 Frame repetition stability

4.13.1 Test limit - FCC 15.319(e)

(e) The frame period (a set of consecutive time slots in which the position of each time slot can be identified by reference to a synchronizing source) of an intentional radiator operating in these subbands shall be 20 milliseconds/X where X is a positive whole number. Each device that implements time division for the purposes of maintaining a duplex connection on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 50 parts per millions (ppm). Each device which further divides access in time in order to support multiple communication links on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 10 ppm. The jitter (time-related, abrupt, spurious variations in the duration of the frame interval) introduced at the two ends of such a communication link shall not exceed 25 microseconds for any two consecutive transmissions. Transmissions shall be continuous in every time and spectrum window during the frame period defined for the device.

Limit :

Frame Repetition Stability (ppm)	± 10 ppm (TDMA)
---	---------------------

4.13.2 Test procedure - ANSI C63.17 sub-clause 6.2.2.

4.13.3 Test results

Mean (Hz)	Standard Deviation (Hz)	Frame Repetition Stability (ppm)	Verdict
100	0.000008657	+0.26	Complies

4.14 Frame Period and Jitter

4.14.1 Test limit - FCC 15.319(e)

(e) The frame period (a set of consecutive time slots in which the position of each time slot can be identified by reference to a synchronizing source) of an intentional radiator operating in these subbands shall be 20 milliseconds/X where X is a positive whole number. Each device that implements time division for the purposes of maintaining a duplex connection on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 50 parts per millions (ppm). Each device which further divides access in time in order to support multiple communication links on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 10 ppm. The jitter (time-related, abrupt, spurious variations in the duration of the frame interval) introduced at the two ends of such a communication link shall not exceed 25 microseconds for any two consecutive transmissions. Transmissions shall be continuous in every time and spectrum window during the frame period defined for the device.

4.14.2 Test procedure - ANSI C63.17 sub-clause 6.2.3.

4.14.3 Test results

Measured Maximum Jitter (μ s)	Limit (μ s)	Verdict
-0.02	25	Complies

4.15 Monitoring time

4.15.1 Test limit - FCC 15.319(e)


- (c) Devices must incorporate a mechanism for monitoring the time and spectrum windows that its transmission is intended to occupy. The following criteria must be met:
- (1) Immediately prior to initiating transmission, devices must monitor the combined time and spectrum windows in which they intend to transmit for a period of at least 10 milliseconds for systems designed to use a 10 millisecond or shorter frame period or at least 20 milliseconds for systems designed to use a 20 millisecond frame period.

4.15.2 Test procedure - ANSI C63.17 sub-clause 7.3.4.

4.15.3 Test results

4.15.4

Measured monitoring time (ms)	Lmiit (ms)	Verdict
315	greater than 10 ms	Complies

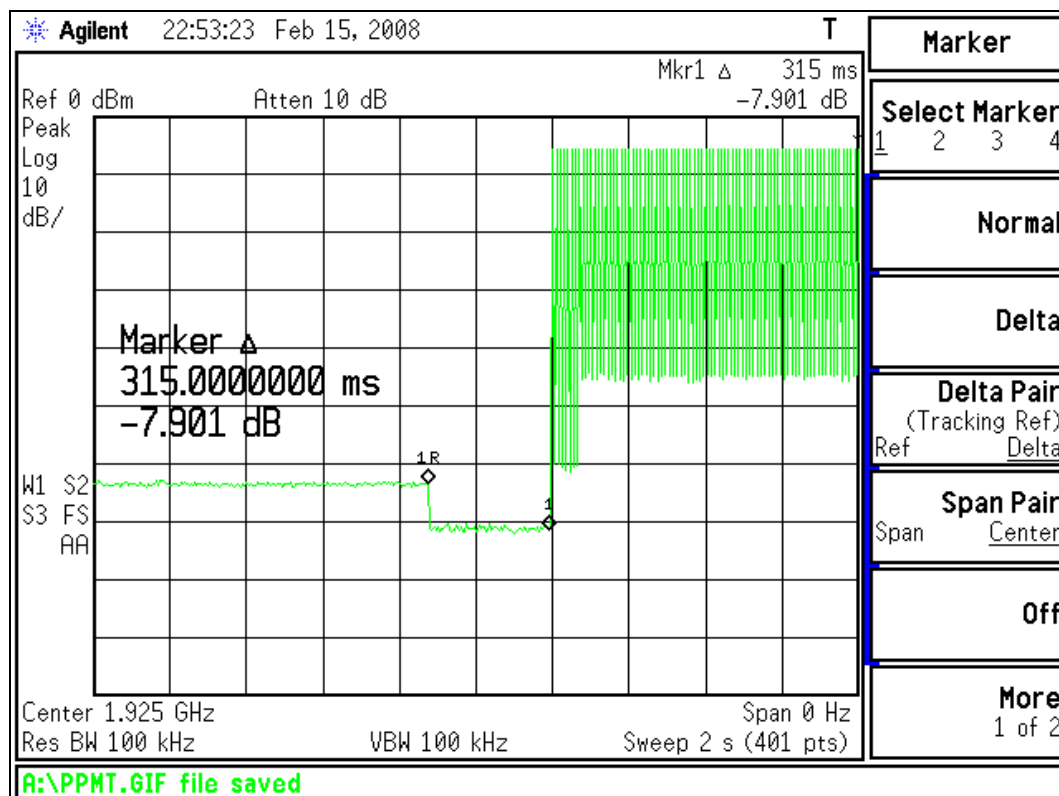

- Monitoring time -

4.16 Monitoring threshold

4.16.1 Test limit - FCC 15.323(c)(2)(9)

- (c) Devices must incorporate a mechanism for monitoring the time and spectrum windows that its transmission is intended to occupy. The following criteria must be met:
- (2) The monitoring threshold must not be more than 30 dB above the thermal noise power for a bandwidth equivalent to the emission bandwidth of the device.
- (9) Devices that have a power output lower than the maximum permitted under the rules may increase their monitoring detection threshold by one decibel for each one decibel that the transmitter power is below the maximum permitted.

4.16.2 Test procedure - ANSI C63.17 sub-clause 7.3.1.

Calculation of Monitoring Threshold Limit:

Lower monitoring threshold : $T_L \leq (-174 + 10\log B + M_L + P_{MAX} - P_{EUT})$ dBm

Upper monitoring threshold : $T_U \leq (-174 + 10\log B + M_U + P_{MAX} - P_{EUT})$ dBm

Where, B = Measured Emission Bandwidth : 1.46×10^6 Hz

M = 30 dB for Lower Monitoring Threshold / 50 dB for Lower Monitoring Threshold

$P_{MAX} = 5\log_{10} B - 10$ dBm

P_{EUT} = Measured Peak Transmit Power : 19.67 dBm

Calculated lower Monitoring Threshold (dBm)	-81.2
Calculated upper Monitoring Threshold (dBm)	-61.2

4.16.3 Test results

The Upper Threshold is applicable for systems with more than 40 duplex system access channels and that implements the Least Interfered Channel Procedure (LIC).

Lower Monitoring Threshold (dBm)	--	N/A
Upper Monitoring Threshold (dBm)	-63.9	Complies

4.17 Maximum transmit time


4.17.1 Test limit - FCC 15.323(c)(3)

- (c) Devices must incorporate a mechanism for monitoring the time and spectrum windows that its transmission is intended to occupy. The following criteria must be met:
- (3) If no signal above the threshold level is detected, transmission may commence and continue with the same emission bandwidth in the monitored time and spectrum windows without further monitoring. However, occupation of the same combined time and spectrum windows by a device or group of cooperating devices continuously over a period of time longer than 8 hours is not permitted without repeating the access criteria.

4.17.2 Test procedure - ANSI C63.17 sub-clause 8.2.2.

4.17.3 Test results

Measured Maximum Transmission duration (sec)	Lmiit (hour)	Verdict
600 sec	8	Complies

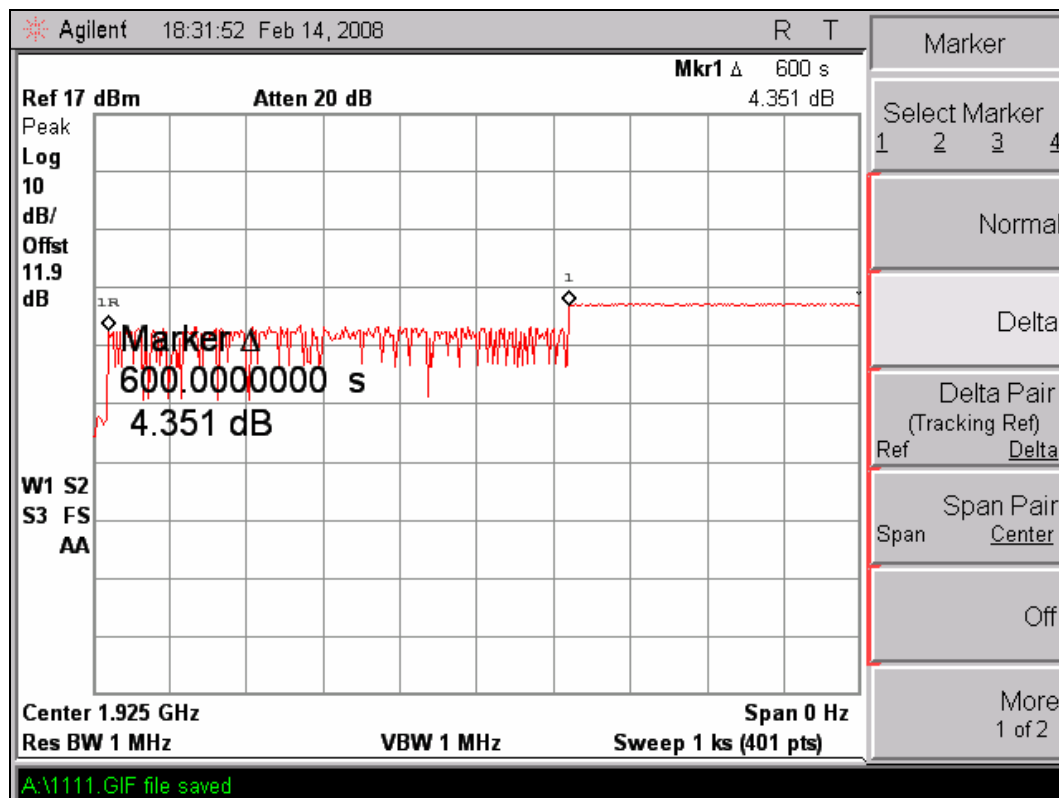

– Maximum transmit time –

4.18 System acknowledgement


4.18.1 Test limit - FCC 15.323(c)(4)

- (c) Devices must incorporate a mechanism for monitoring the time and spectrum windows that its transmission is intended to occupy. The following criteria must be met:
- (4) Once access to specific combined time and spectrum windows is obtained an acknowledgement from a system participant must be received by the initiating transmitter within one second or transmission must cease. Periodic acknowledgements must be received at least every 30 seconds or transmission must cease. Channels used exclusively for control and signalling information may transmit continuously for 30 seconds without receiving an acknowledgement, at which time the access criteria must be repeated.


4.18.2 Test procedure - ANSI C63.17 sub-clause 8.1.1 & 8.2.1

4.18.3 Test results

Test	Result (ms)	Limit (s)	Verdict
Initial transmission without acknowledgements	550	1	Complies
Transmission time after loss of acknowledgements	750	30	Complies

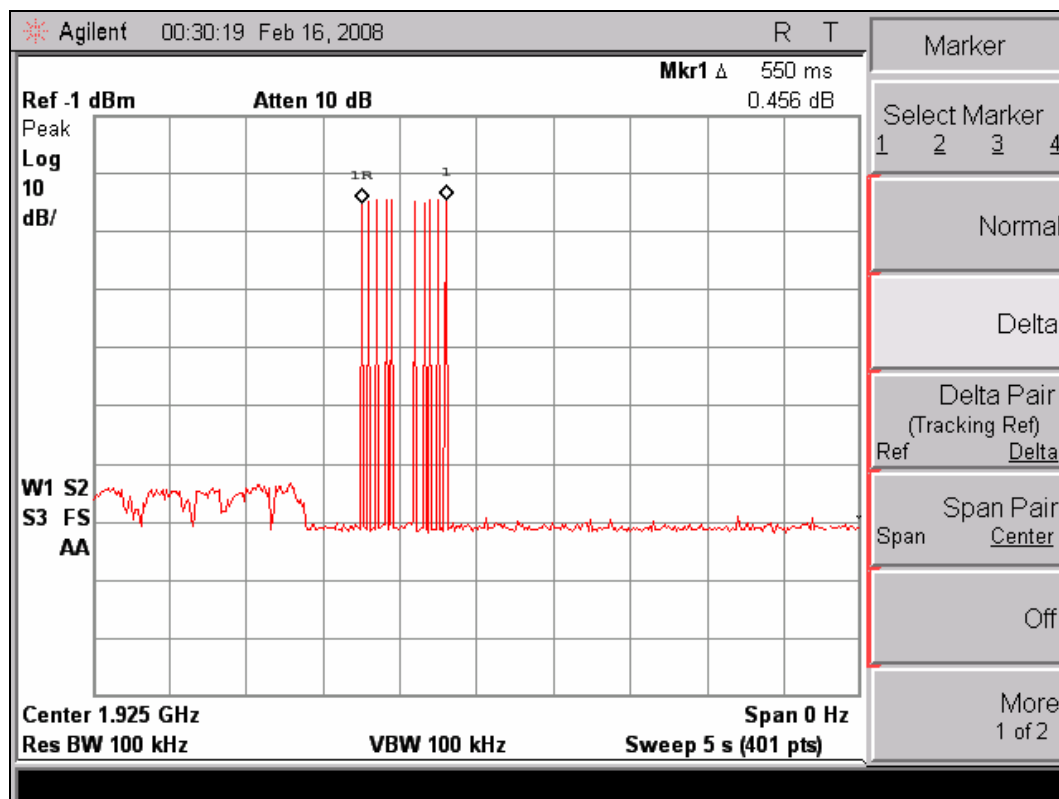

– Initial transmission without acknowledgements –

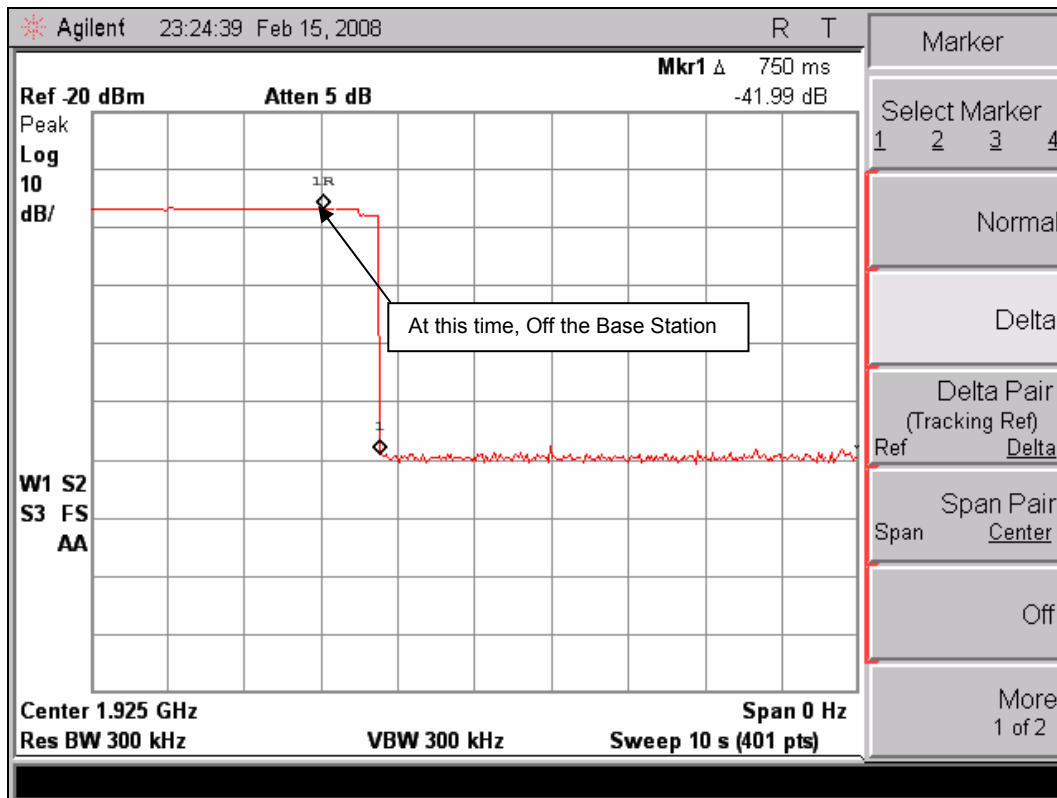

– Transmission time after loss of acknowledgements –

4.19 Least Interfered Channel & Channel confirmation

4.19.1 Test limit - FCC 15.323(c)(5)

- (c) Devices must incorporate a mechanism for monitoring the time and spectrum windows that its transmission is intended to occupy. The following criteria must be met:
- (5) If access to spectrum is not available as determined by the above, and a minimum of 40 duplex system access channels are defined for the system, the time and spectrum windows with the lowest power level below a monitoring threshold of 50 dB above the thermal noise power determined for the emission bandwidth may be accessed.

4.19.2 Test procedure - ANSI C63.17 sub-clause 7.3.3

Calculated Lower monitoring threshold : -81.2 dBm

Calculated Upper monitoring threshold : -61.2 dBm

The upper threshold is applicable for systems with more than 40 duplex system access channels and that implements the Least Interfered Channel Procedure (LIC).

4.19.3 Test results

Test	Results	Verdict
Apply interference on CH1 at level $T_L + U_m + 7$ dB Apply interference on CH5 at level $T_L + U_m$ dB	Transmission always on CH5	Complies
Apply interference on CH1 at level $T_L + U_m$ dB Apply interference on CH5 at level $T_L + U_m + 7$ dB	Transmission always on CH1	Complies
Apply interference on CH1 at level $T_L + U_m + 1$ dB Apply interference on CH5 at level $T_L + U_m - 6$ dB	Transmission always on CH5	Complies
Apply interference on CH1 at level $T_L + U_m - 6$ dB Apply interference on CH5 at level $T_L + U_m + 1$ dB	Transmission always on CH1	Complies

4.20 Random waiting

4.20.1 Test limit - FCC 15.323(c)(6)

- (c) Devices must incorporate a mechanism for monitoring the time and spectrum windows that its transmission is intended to occupy. The following criteria must be met:
- (6) If the selected combined time and spectrum windows are unavailable, the device may either monitor and select different windows or seek to use the same windows after waiting an amount of time, randomly chosen from a uniform random distribution between 10 and 150 milliseconds, commencing when the channel becomes available.

4.20.2 Test procedure - ANSI C63.17 sub-clause 8.1.3

4.20.3 Attestation

The option 15.323(c)(6) is not implemented by this product.

4.21 Monitoring Bandwidth


4.21.1 Test limit - FCC 15.323(c)(7)

- (c) Devices must incorporate a mechanism for monitoring the time and spectrum windows that its transmission is intended to occupy. The following criteria must be met:
- (7) The monitoring system bandwidth must be equal to or greater than the emission bandwidth of the intended transmission and have a maximum reaction time less than $50 \times \text{SQRT}(1.25/\text{emission bandwidth in MHz})$ microseconds for signals at the applicable threshold level but shall not be required to be less than 50 microseconds.


4.21.2 Test procedure - ANSI C63.17 sub-clause 7.4.2 – more detailed test

4.21.3 Test results


Test frequency	Test level (above $T_U + U_M$)	Result	Verdict
-6 dB points	-55.2 dBm	No transmission	Complies
-12 dB points	-55.2 dBm	No transmission	Complies

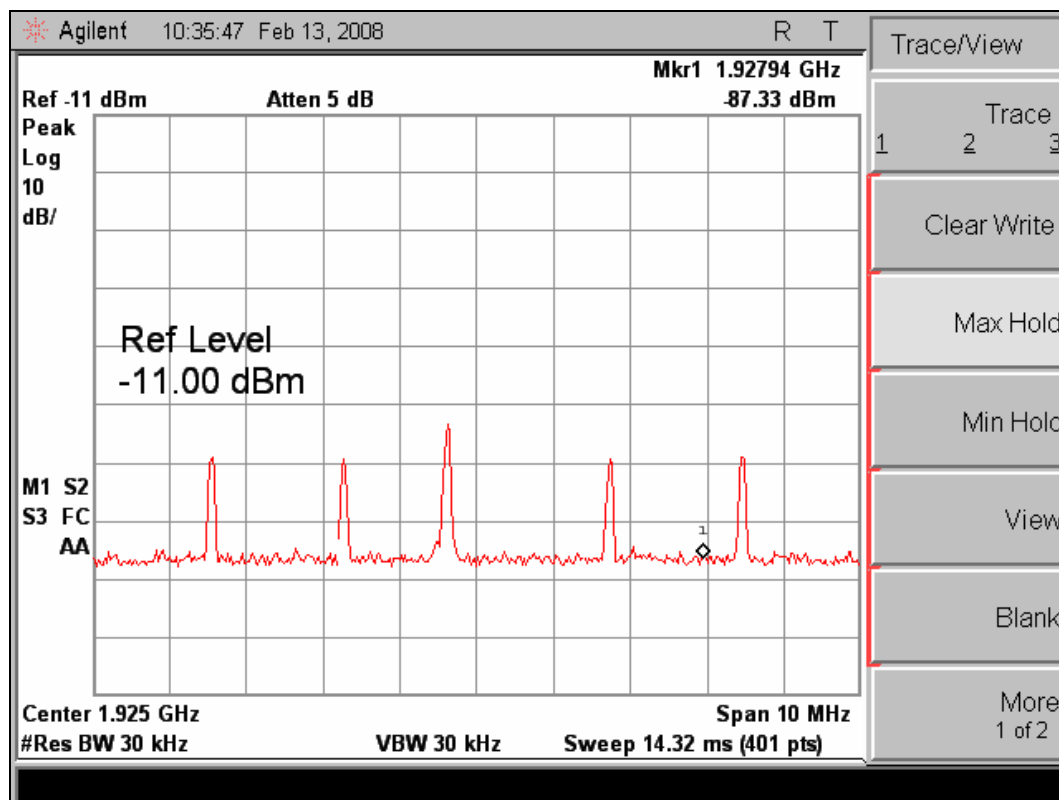


– Interference level on -6 dB lower point –

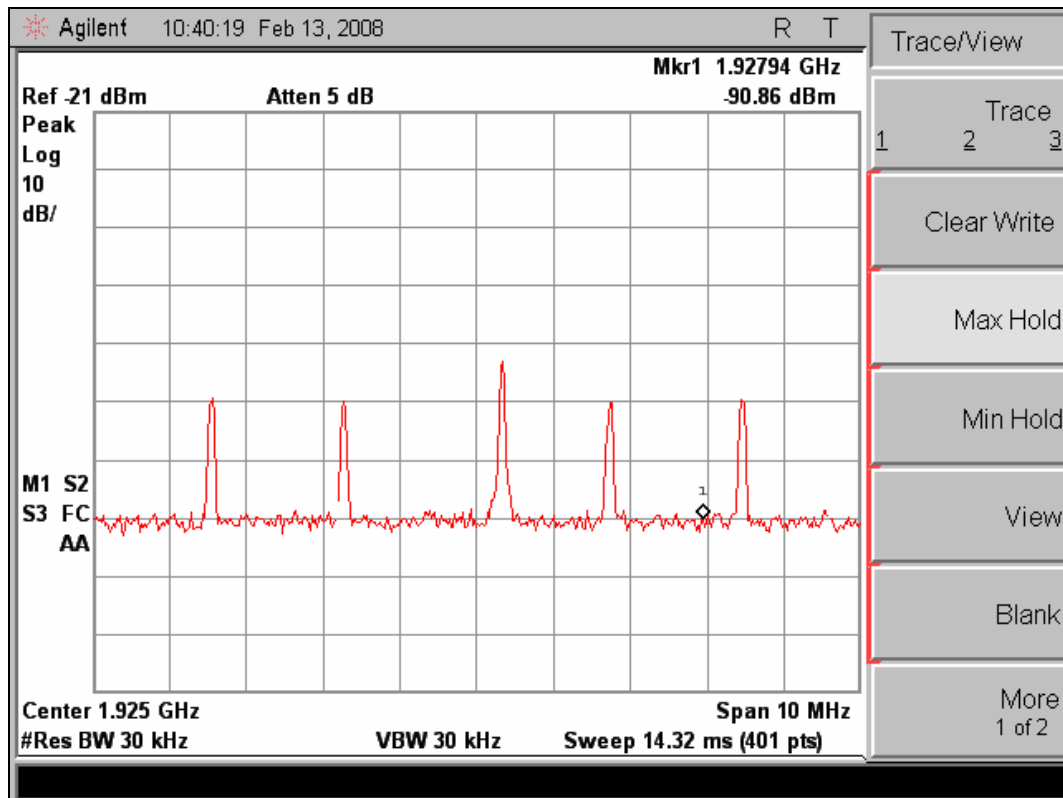

- Interference level on -6 dB higher point -

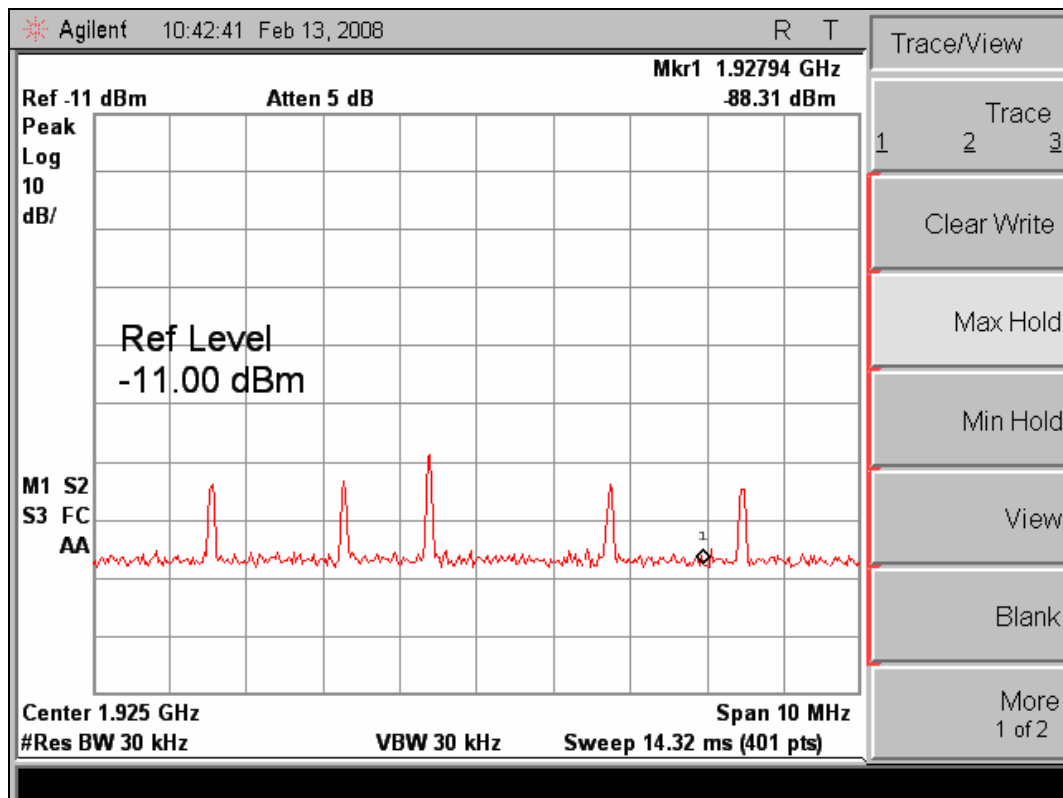

- Interference level on -12 dB lower point -

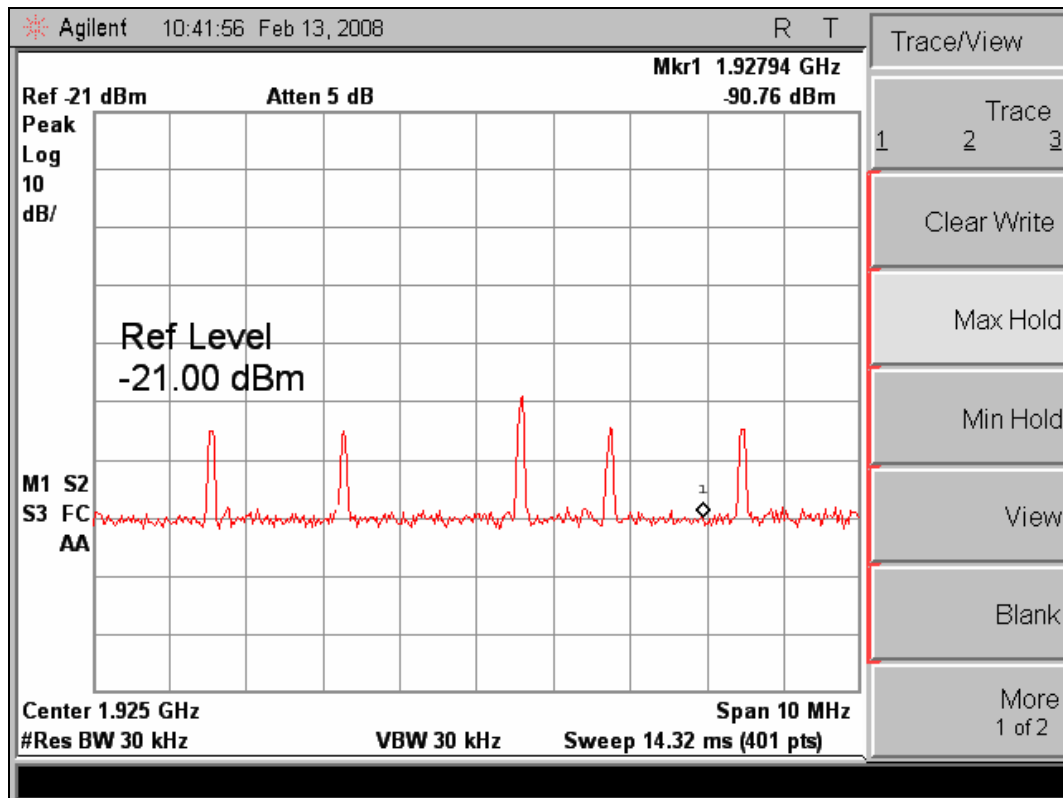

– Interference level on -12 dB higher point –

4.22 Maximum reaction time

4.22.1 Test limit - FCC 15.323(c)(7)


- (c) Devices must incorporate a mechanism for monitoring the time and spectrum windows that its transmission is intended to occupy. The following criteria must be met:
- (7) If a signal is detected that is 6 dB or more above the applicable threshold level, the maximum reaction time shall be $35 \times \text{SQRT}(1.25/\text{emission bandwidth in MHz})$ microseconds but shall not be required to be less than 35 microseconds.

4.22.2 Test procedure - ANSI C63.17 sub-clause 7.5.


4.22.3 Test results

Pulse Width	Results	Verdict
35 us	No transmission	Complies
50 us	No transmission	Complies

* Since Emission bandwidth is greater than 1.25 MHz the test was performed with pulse lengths 35 & 50 us.

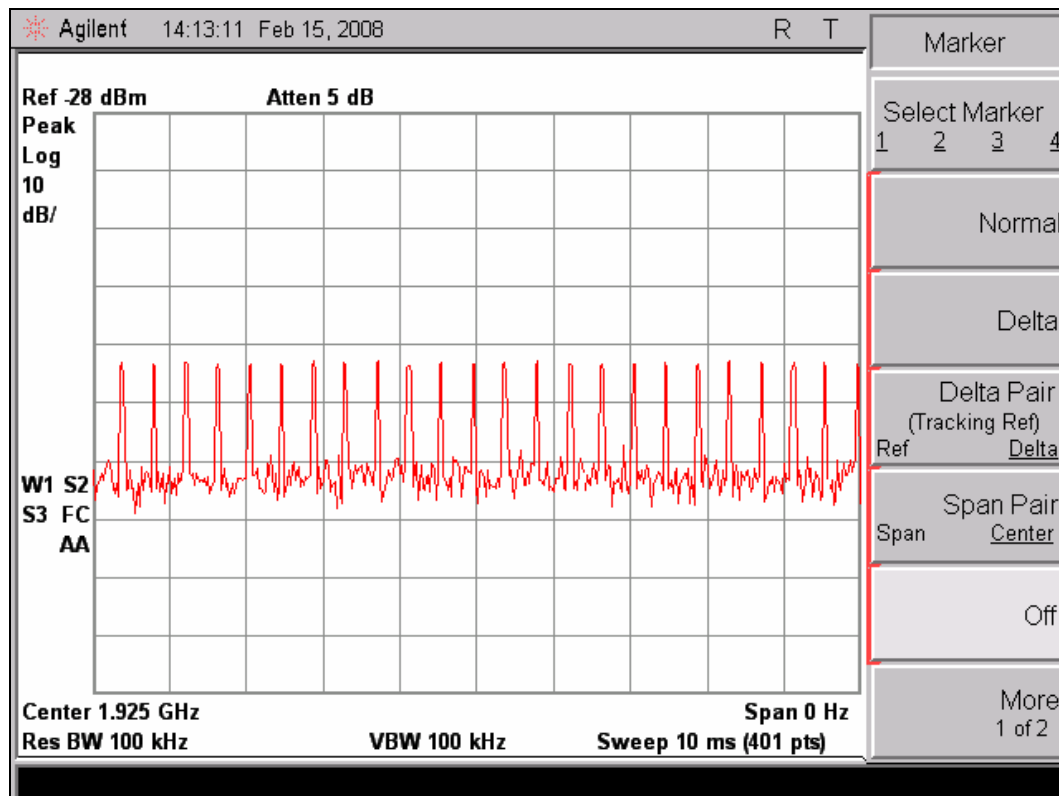

– 35 μ s pulses –

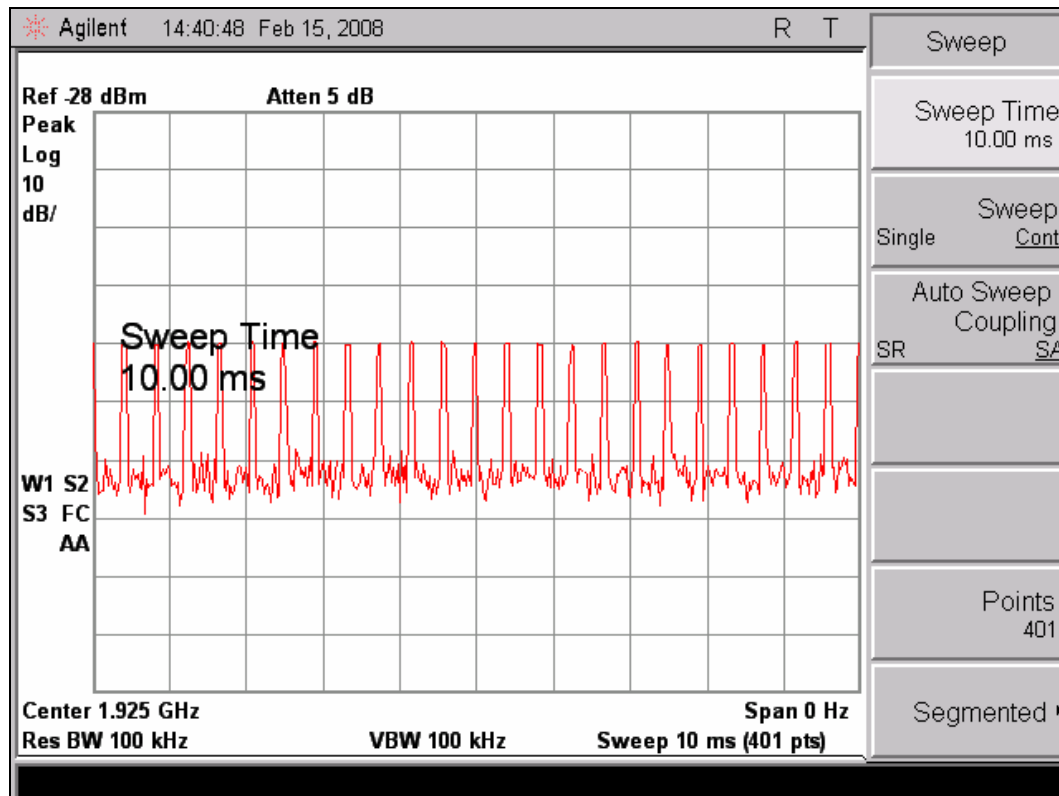

- 50 μ s pulses -

4.23 Monitoring antenna

4.23.1 Test limit - FCC 15.323(c)(8)

- (c) Devices must incorporate a mechanism for monitoring the time and spectrum windows that its transmission is intended to occupy. The following criteria must be met:
- (8) The monitoring system shall use the same antenna used for transmission, or an antenna that yields equivalent reception at that location.

4.23.2 Test procedure - ANSI C63.17 sub-clause 4

4.23.3 Attestation


EUT uses the same antenna used for transmission and monitoring that is in compliance meet above provision.

4.24 Duplex Connections


4.24.1 Test limit - FCC 15.323(c)(10)

- (c) Devices must incorporate a mechanism for monitoring the time and spectrum windows that its transmission is intended to occupy. The following criteria must be met:
- (10) An initiating device may attempt to establish a duplex connection by monitoring both its intended transmit and receive time and spectrum windows. If both the intended transmit and receive time and spectrum windows meet the access criteria, then the initiating device can initiate a transmission in the intended transmit time and spectrum window. If the power detected by the responding device can be decoded as a duplex connection signal from the initiating device, then the responding device may immediately begin transmitting on the receive time and spectrum window monitored by the initiating device.


4.24.2 Test procedure - ANSI C63.17 sub-clause 8.3.2

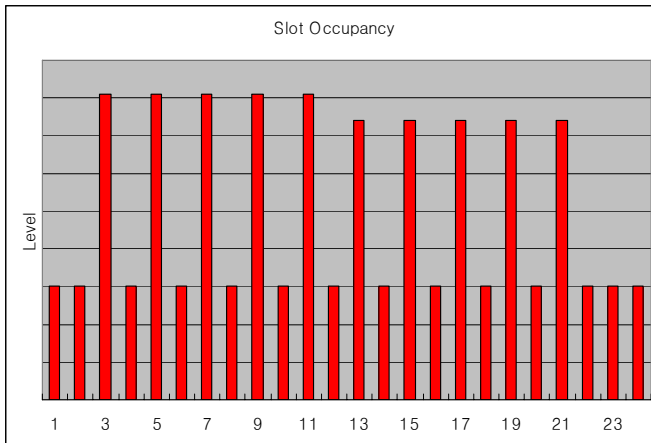

– Slot Occupancy for clause 8.3.2(c) –

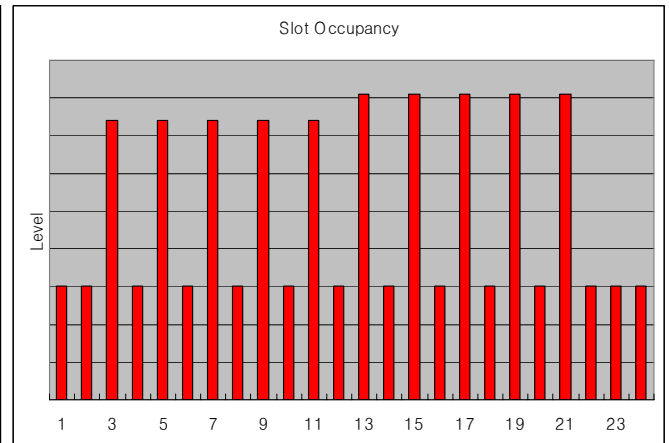


– Slot Occupancy for clause 8.3.2(e) –

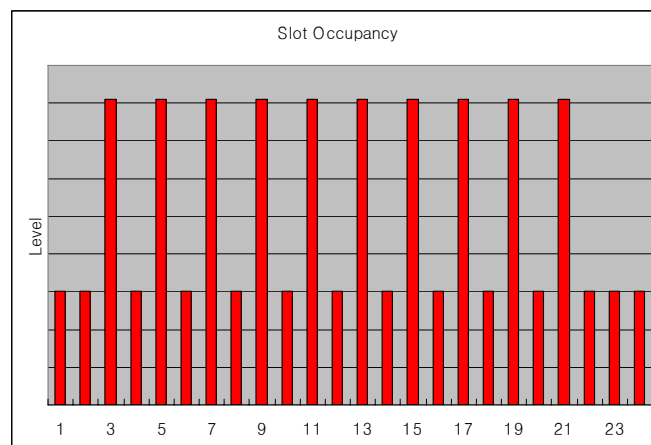


– Slot Occupancy for clause 8.3.2(f) –


4.24.3 Test results

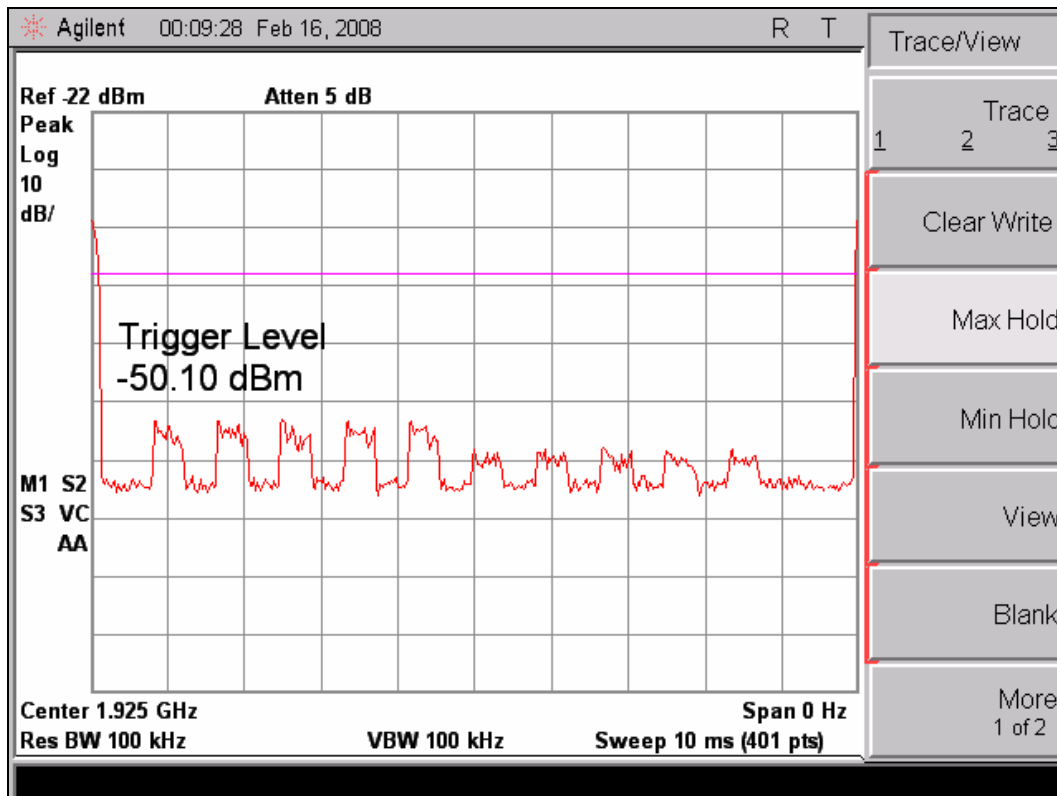


– Slot Occupancy for clause 8.3.2(c) –

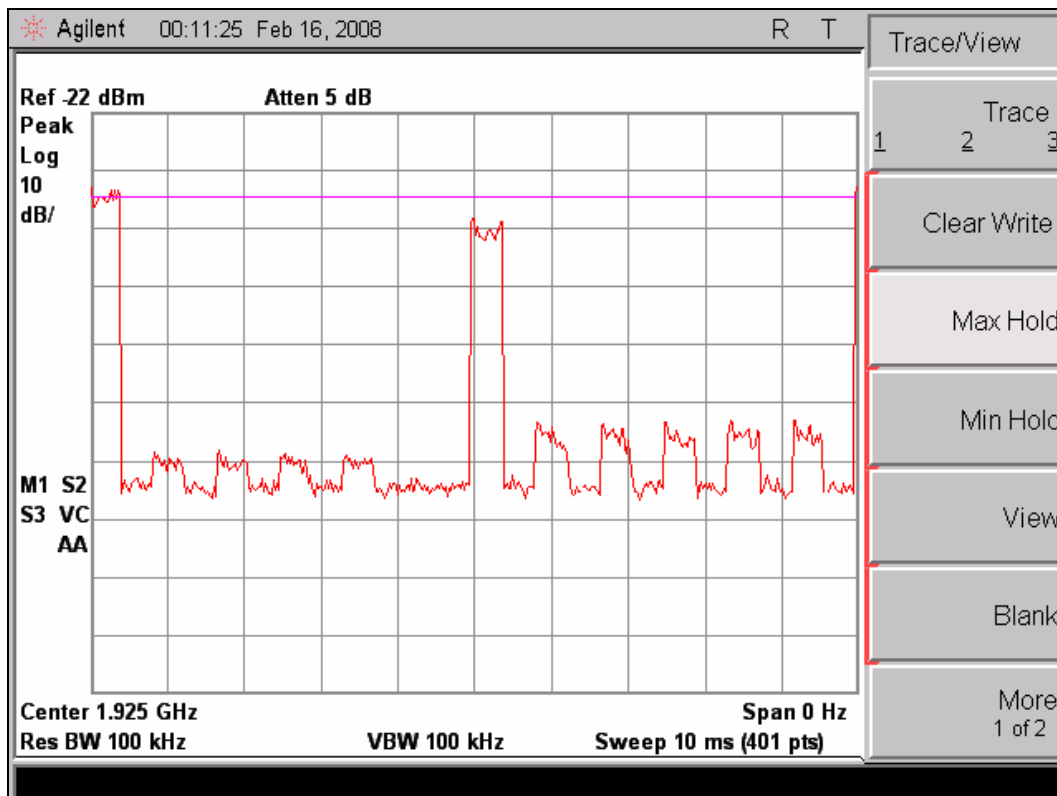


– EUT transmits on interference free receive slot –

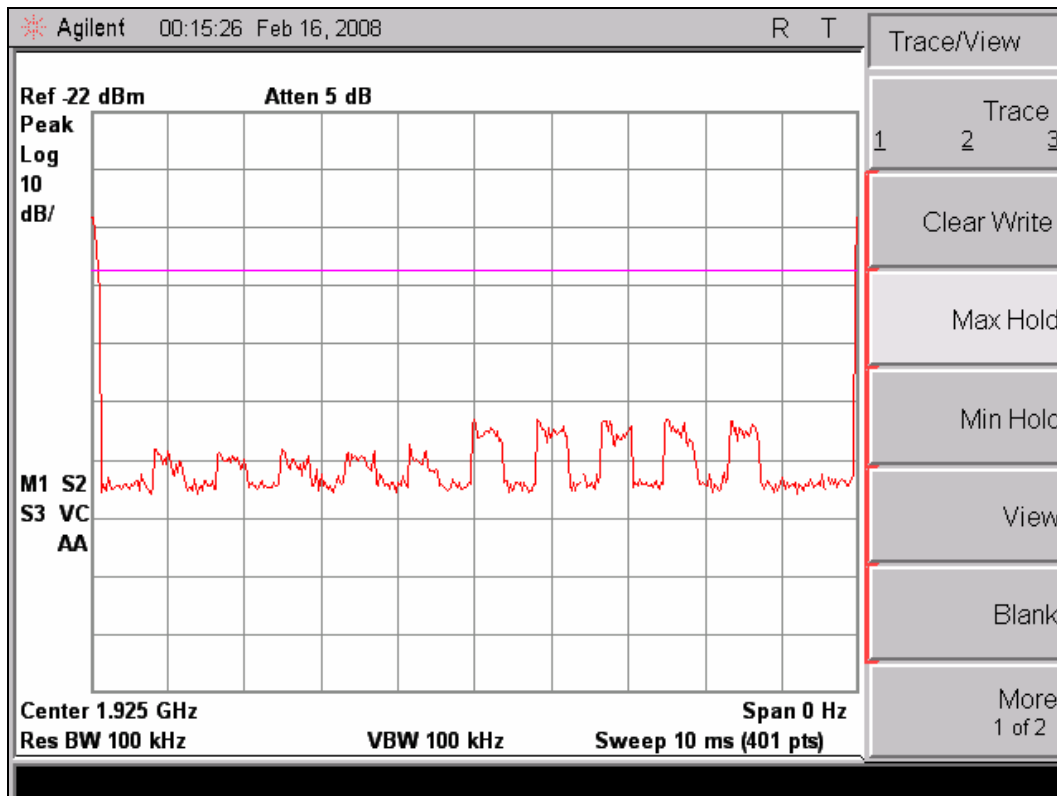

– Slot Occupancy for clause 8.3.2(e) –

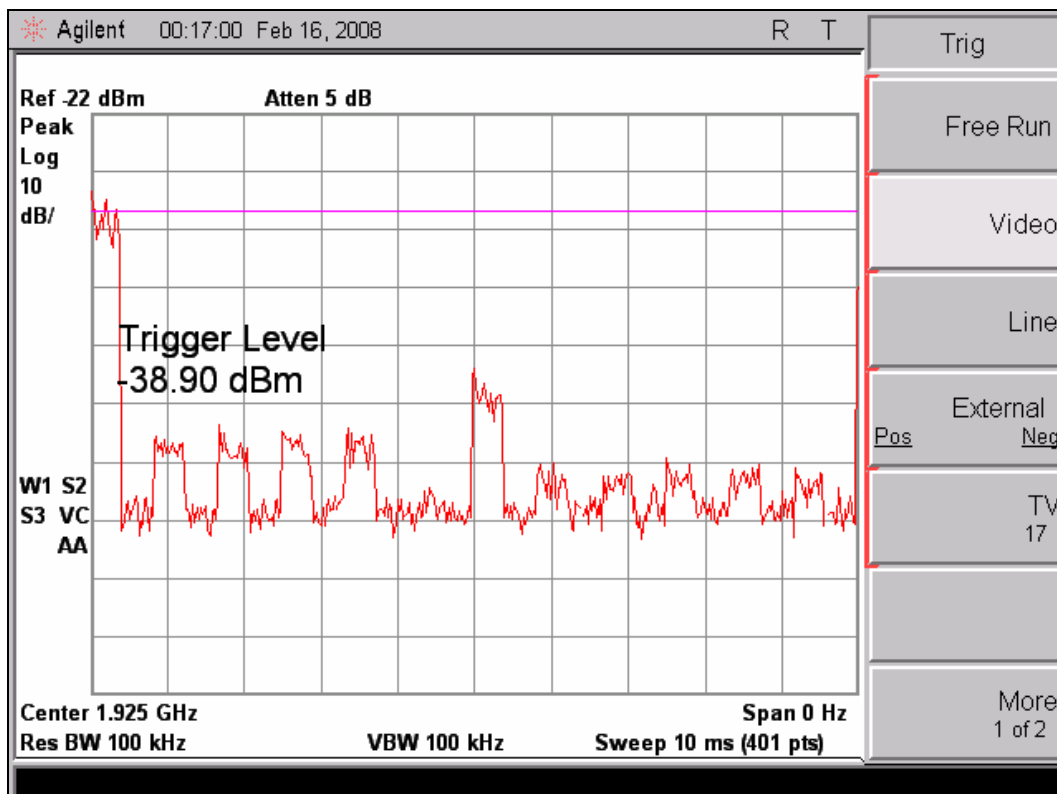

– EUT transmits on interference free transmit slot –

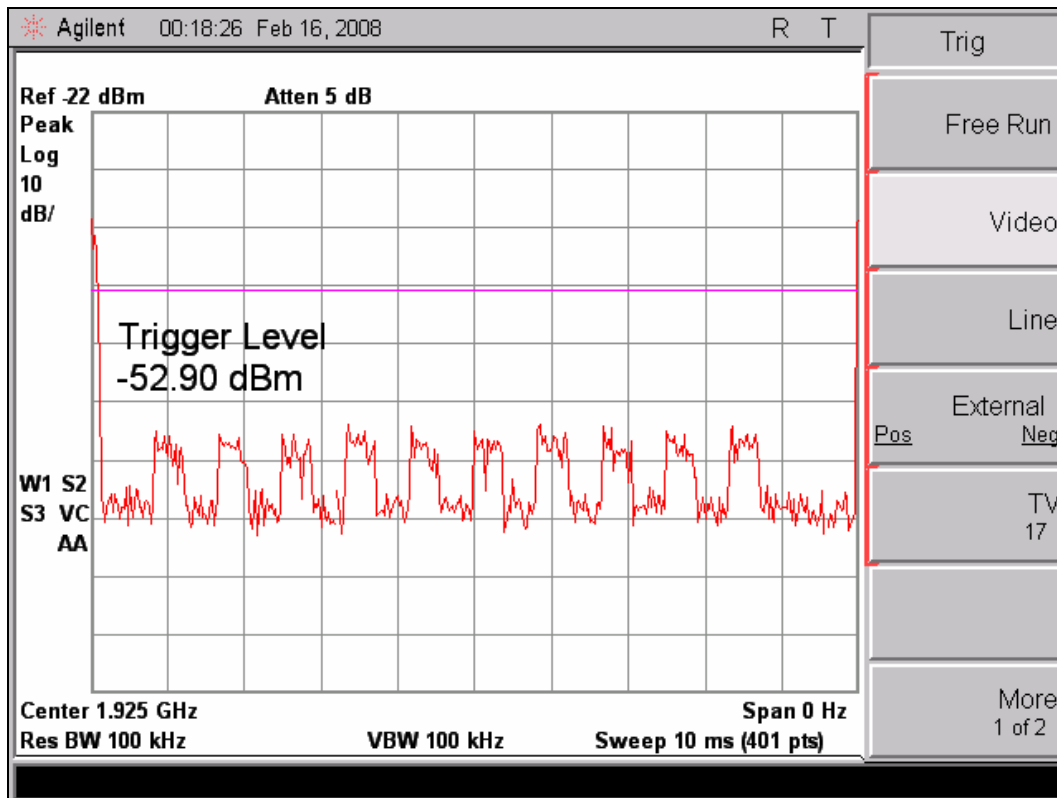

– Slot Occupancy for clause 8.3.2(f) & No connection was established –

Test	Results	Verdict
Slot Occupancy for clause 8.3.2(c)	Transmission on interference-free receive time/spectrum window	Complies
Slot Occupancy for clause 8.3.2(e)	Transmission on interference-free transmit time/spectrum window	Complies
Slot Occupancy for clause 8.3.2(f)	No transmission	Complies


4.25 Alternative Monitoring Interval for Co-located Device

4.24.1 Test limit - FCC 15.323(c)(11)

- (c) Devices must incorporate a mechanism for monitoring the time and spectrum windows that its transmission is intended to occupy. The following criteria must be met:
- (11) An initiating device that is prevented from monitoring during its intended transmit window due to monitoring system blocking from the transmissions of a co-located (within one meter) transmitter of the same system, may monitor the portions of the time and spectrum windows in which they intend to receive over a period of at least 10 milliseconds. The monitored time and spectrum window must total at least 50 percent of the 10 millisecond frame interval and the monitored spectrum must be within 1.25 MHz of the center frequency of channel(s) already occupied by that device or collocated co-operating devices. If the access criteria is met for the intended receive time and spectrum window under the above conditions, then transmission in the intended transmit window by the initiating device may commence.

4.24.2 Test procedure - ANSI C63.17 sub-clause 8.4.


4.24.3 Test results

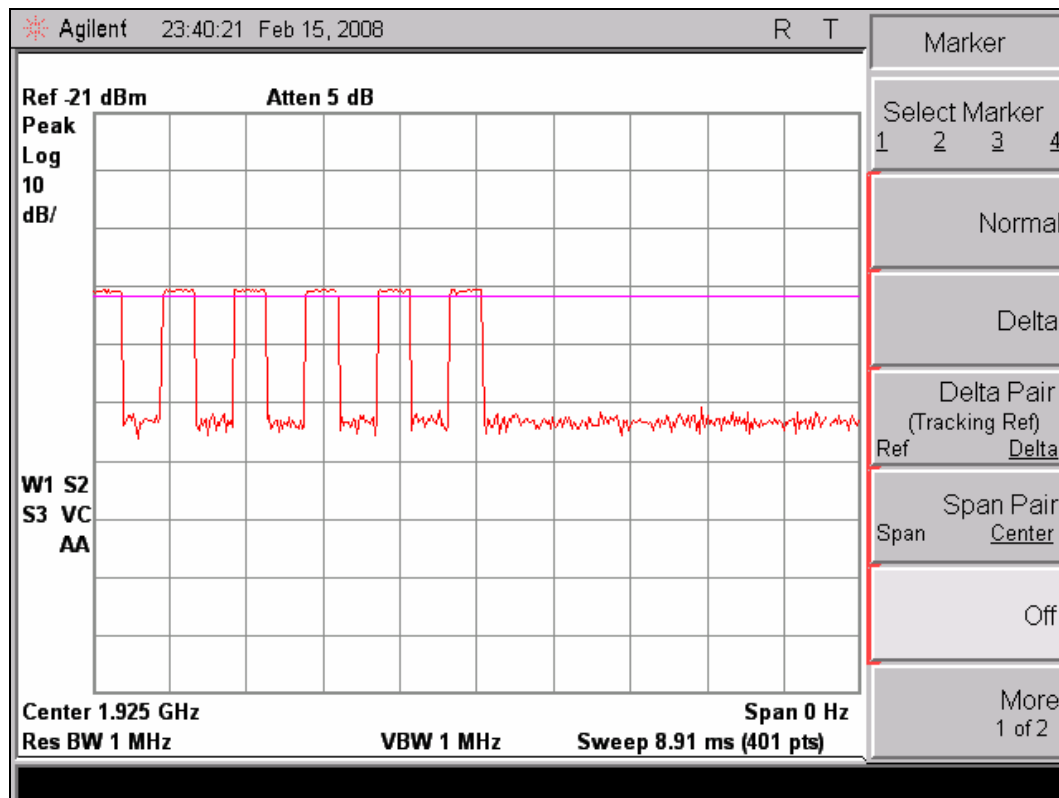


– No connection was established –

V. TEST SET UP

1. Frequency & Timing Measurement

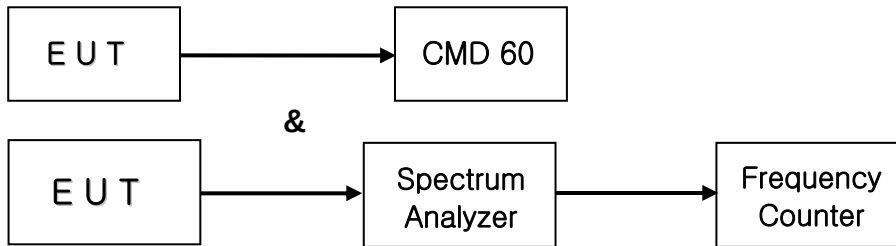

2. Monitoring Tests

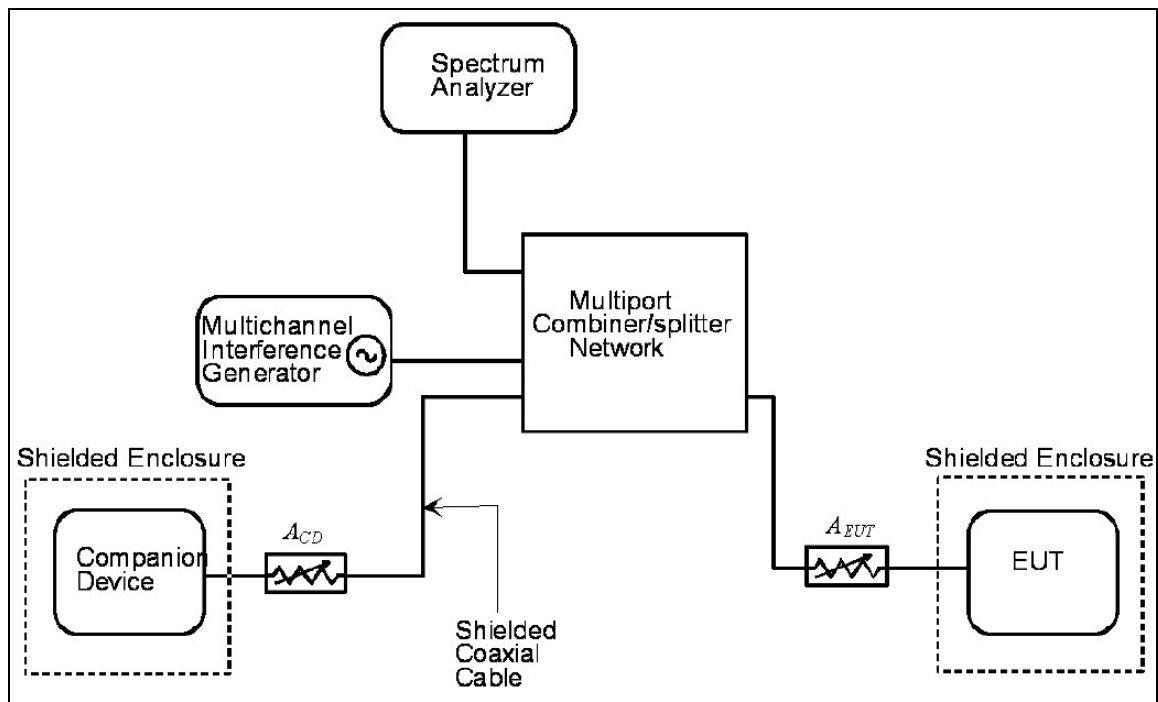

V. TEST EQUIPMENT

No.	Equipment	Manufacturer	Model	S/N
1	Spectrum Analyzer	Agilent	E4407B	US41443316
2	Synthesized Sweeper	HP	83620A	3250A01653
3	Digital RF Signal Generator	Agilent	E4438C	US41460859
4	Signal Generator	R&S	SMIQ O3	DE22348
5	Spectrum Analyzer	Agilent	E4407B	US41443316
6	PSA Series Spectrum Analyzer	Agilent	E4448A	US44300484
7	DC Power Supply	Agilent	E4356A	MY41000296
8	DC Power Supply	Agilent	E3645A	MY40000851
9	Oscilloscope	Tektronix	TDS3052B	B010173
10	Directional Coupler	Agilent	87300C	MY44300126
11	Directional Coupler	Agilent	773D	MY28390213
12	VHF Attenuator	HP	355D	2522A45959
13	Coaxial Attenuator	TenuLine	8340-200	1087
14	Coaxial Attenuator	TenuLine	8080	7676
15	Power Divider	HP	11636A	6047
16	Power Splitter	HP	11667A	21063
17	Frequency Counter	Anritsu	MF2412B	2108A07645
18	Synthesizer/Level Generator	HP	3336C	2903A02111
19	Temp/Humidity Chamber	Korea Power Machine	HI-5050	HI200420

No.	Equipment	Manufacturer	Model	S/N
20	Function/Arbitrary Waveform Generator	Agilent	33250A	MY40015646
21	EMI Receiver	R&S	ESCS30	100206
22	EMI Receiver	R&S	ESPI	100043
23	Pre-Amplifier	HP	8347A	2834A00543
24	Pre-Amplifier	HP	8449B	3008A00302
25	Log-Periodic Antenna	ETS-Lindgren	3148	5051
26	Tuned Dipole Antenna	Schwarzbeck	VHA 9103	--
27	Biconi-Log Antenna	ETS-Lindgren	3142B	00023784
28	Double Ridge Wave Guide	ETS-Lindgren	3115	6913