

EMC TEST REPORT

Project No.	LBE20153882	Issue No.	0
Applicant	Name of organization	Samsung Electronics Co., Ltd.	
	Address	(Maetan-dong) 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-742, Republic of Korea	
	Date of application	Jun 24, 2015	
EUT	Type of device	☒ Class B personal computers and peripherals ☐ All other devices	
	Equipment authorization	☐ Declaration of Conformity ☒ Certification ☐ Verification	
	FCC ID	A3LSMT567V	
	Kind of product	Tablet	
	Model No.	SM-T567V	
	Variant Model No.	Refer to clause 4.6	
	Manufacturer	SAMSUNG ELECTRONICS CO., LTD. 94-1, Imsu-dong, Gumi-si, Gyengsangbuk-do, 730-722, Republic of Korea SAMSUNG ELECTRONICS HUIZHOU CO.,LTD. 516229, Chenjiang Town, HuiZhou City, Guangdong Province, China	
Applied Standards		FCC Part 15, Subpart B, Class B / ANSI C63.4-2009	
Test Period		Jul 02, 2015	
Issue date		Jul 07, 2015	

Test result : Complied

The equipment under test has found to be compliant with the applied standards.
(Refer to the attached test result for more detail.)

Tested by : Yamin Liu

刘亚民

Reviewed by : Zhongyuan Gao

高志远

The test results in this report only apply to the tested sample. This report must not be reproduced, except in full, without written permission from CSQAL



CHINA SAMSUNG QUALITY ASSURANCE LABORATORY
 Wei 4 Road, Microelectronics Industrial Park, Jingang High way, Tianjin, China
 Tel: 86 22 23961234, Fax: 86 22 23961234-5214

Table of contents

1. Report Information

1.1 Revision history	3
----------------------------	---

2. Summary of test results

2.1 Emission	3
--------------------	---

3. General Information

3.1 Test facility	3
-------------------------	---

4. Test Configuration

4.1 Test Peripherals	4
4.2 EUT operating mode	4
4.3 Details of Sampling	4
4.4 Used cable description	5
4.5 Test arrangement	5
4.6 EUT Description	6
4.7 Clock Frequencies	6
4.8 Test configuration and condition	7
4.9 Measurement uncertainty	7

5. Result of individual tests

5.1 Conducted disturbance	8
5.2 Radiated disturbance	10

1. Report Information

1.1 Revision history

No	Revised detailed information
Issue 0	There are no revisions and this version is basic test report.

2. Summary of test results

1.1 Emission

The EUT has been tested according to the following specifications:

Applied	Test type	Applied standard	Result
☒	Conducted Disturbance (Mains port)	FCC Part 15 Subpart B / ANSI C63.4-2009 (Class B)	Complied
☒	Radiated Disturbance		Complied

3. General Information

3.1 Test facility

CHINA SAMSUNG QUALITY ASSURANCE LABORATORY(CSQAL) Wei 4 Road, Microelectronics Industrial Park, Jingang High way, Tianjin, China

All testing are performed in Semi-anechoic chambers conforming to the site attenuation characteristics defined by ANSI C63.4, CISPR 22, 16-1 and 16-2. and Shielded rooms.

CHINA SAMSUNG QUALITY ASSURANCE LABORATORY(CSQAL) is operated as testing laboratory in accordance with the requirements of ISO/IEC 17025:2005.

4. Test Setup configuration

4.1 Test Peripherals

The cables used for these peripherals are either permanently attached by the peripheral manufacturer or coupled with an assigned cable as defined below.

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Mark	Description	Model No.	Serial No.	Manufacturer / Trademark	FCC ID / DoC
A	Tablet	SM-T567V	-	SAMSUNG	A3LSMT567V
B	Battery	EB-T567ABA	-	SAMSUNG	-
C	Travel Adapter	EP-TA12JWE	-	E&P	-
D	Headset	EHS61ASFWE	-	SAMSUNG	-
E	Data Cable	EP-DG925UWZ	-	KSD	-
F	microSD Card	32GB	-	SAMSUNG	-
G	Desk-Top Computer	DB-Z400-PC01CN	JBT391YDB0081N	SAMSUNG	DoC
H	LCD Monitor	LS24C45KBW	ZX1DHTED500003Y	SAMSUNG	DoC
I	USB Keyboard	SK-8185	OY526K	Dell	DoC
J	USB Mouse	SNJ-B138	Z164146	Dell	DoC
K	Router	H505	10012700728	ipTime	DoC
L	Power Supply	FLDE0501000K	HU10486-9002A	ipTime	DoC

4.2 EUT operating mode

To achieve compliance applied standard specification, the following mode(s) were made during compliance testing:

Operating Mode 1	USB Mode (Data Communication)
-------------------------	-------------------------------

4.3 Details of Sampling


Customer selected, single unit.

4.4 Used cable description

The EUT is configured, installed, arranged and operated in a manner consistent with typical applications. Interface cables/loads/devices are connected to at least one of each type of interface port of the EUT, and where practical, each cable shall be terminated in a device typical of actual usage. The type(s) of interconnecting cables to be used and the interface port (of the EUT) to which these were connected:

No.	Connected cable	Length [m]	Shielded [Y/N]	Note
1	Data Cable	1.2	Yes	From EUT to Desktop PC
2	Headset	1.2	Yes	For EUT
3	USB	1.8	Yes	For Keyboard
4	USB	1.8	Yes	For Mouse
5	Power	1.8	No	For Desktop PC
6	Power	1.8	No	For LCD Monitor
7	Power	1.8	No	From Gigabit Switch 8 to Power Supply
8	Power	1.8	No	For Power Supply
9	VGA Cable	1.8	Yes	From Monitor to Desktop PC
10	LAN cable	2.0	Yes	From Desktop PC to Router
11	LAN cable	2.0	Yes	From Router to Local Area Network

4.5 Test arrangement

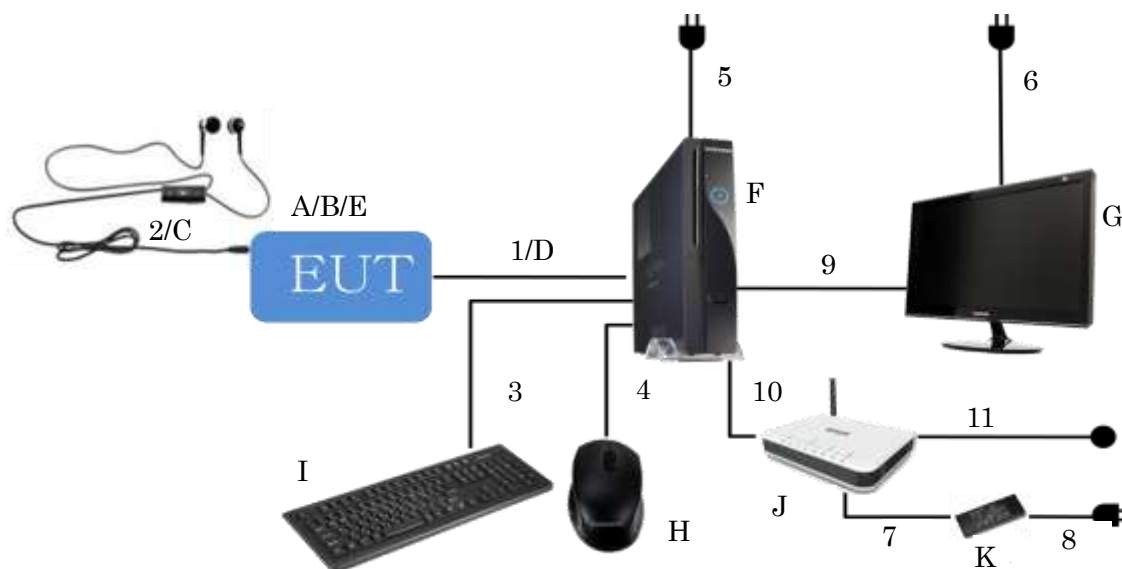

4.6 EUT Description

4.6.1 The following features describe EUT represented by this report:

Item		Specification
	WCDMA B1	TX :1920 ~ 1980 MHz RX :2110 ~ 2170 MHz
	WCDMA B2	TX : 1 852.4 ~ 1 907.6 MHz RX : 1 932.4 ~ 1 987.6 MHz
	WCDMA B5	TX : 826.4 ~ 846.6 MHz RX : 871.4 ~ 891.6 MHz
	WCDMA B8	TX : 880 ~ 915 MHz RX : 935 ~ 960 MHz
	LTE B2	TX : 1850 ~ 1910 MHz RX : 1930 ~ 1990 MHz
	LTE B4	TX : 1710 ~ 1755 MHz RX : 2110 ~ 2155MHz
	LTE B13	TX : 777 ~ 787 MHz RX : 746 ~ 756 MHz
Operating Temperature (°C)		5 ~ 35
Operating Humidity (%)		0 ~ 95

4.6.2 The variant models

- None

4.7 Clock Frequencies

Kind of Clocks	Frequency [MHz]
CPU	1 200

4.8 Test configuration and condition

- ☐ The EUT exercise program which is the samsung standardized emission test program for windows was used during all EMC measurements were tested. This program was contained on the PC hard disk drive. Once loaded, the program sequentially exercises each system component in turn.
- ☒ The EUT was exercised during the testing by data read and write cycles repeated with internal storage devices. At the end of the test, the copied back data was compared with original.
- ☐ The EUT was connected to the PC by using USB data cable to charge.
- ☐ The system was configured for testing in a typical fashion that a customer would normally use, and was tested while in an automated non-attendant mode.

Power source for the EUT operating was supplied by CVCF made by the Pacific Power Source Corp.

- Test Voltage : AC 120 V, 60 Hz

4.9 Measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus: (According to CISPR 16-4 and UKAS Lab 34.)

4.9.1 Emission

Test type		Measurement uncertainty (C.L. 95 %, k = 2)
Conducted disturbance	AC Mains	3.0 dB
Radiated Disturbance (30 MHz ~ 1 GHz)	Horizontal	4.4 dB
	Vertical	4.4 dB
Radiated Disturbance (1 GHz ~ 6 GHz)	Horizontal	3.8 dB
	Vertical	3.8 dB

5. Results of individual test

5.1 Conducted disturbance

The EUT was connected to the Desk-Top Computer which was powered from one LISN for the measurements. The support equipment power cables were connected to a second LISN. Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration. The EUT measured in accordance with the methods described in standards.

Limits for conducted disturbance at the mains ports of Class B ITE

Frequency range Limits MHz	Resolution Bandwidth	Limits dB(μV)	
		Quasi-peak	Average
0,15 to 0,50	9 kHz	66 to 56	56 to 46
0,50 to 5	9 kHz	56	46
5 to 30	9 kHz	60	50

NOTE 1 The lower limit shall apply at the transition frequency.
NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

5.1.1 Test instrumentation


Test instrumentation	Model name	Manufacturer	Serial or Firmware (No./Ver.)	Calibration	
				Date	Interval (Month)
Test Software	EP5CE	TOYO	V 4.7.10	N/A	N/A
Measuring receiver	ESCI	R&S	101027	2015.03.02	12
Artificial mains network	ENV216	R&S	101123	2014.08.18	12
Artificial mains network	ENV216	R&S	101059	2014.08.18	12

5.1.2 Temperature and humidity condition

Test date	2015-07-02	Test engineer	Yamin Liu
Climate condition	Ambient temperature	(22 ~ 23) °C	Limit (15.0 to 35.0) °C
	Relative humidity	(43 ~ 44) R.H.	Limit (25.0 to 75.0) % R.H.
	Atmospheric pressure	(101.2 ~ 101.4) kPa	Limit (86.0 to 106.0) kPa
Test place	Shielded Room #2		

5.1.3 Test results

- Operating Mode 1: AC Mains

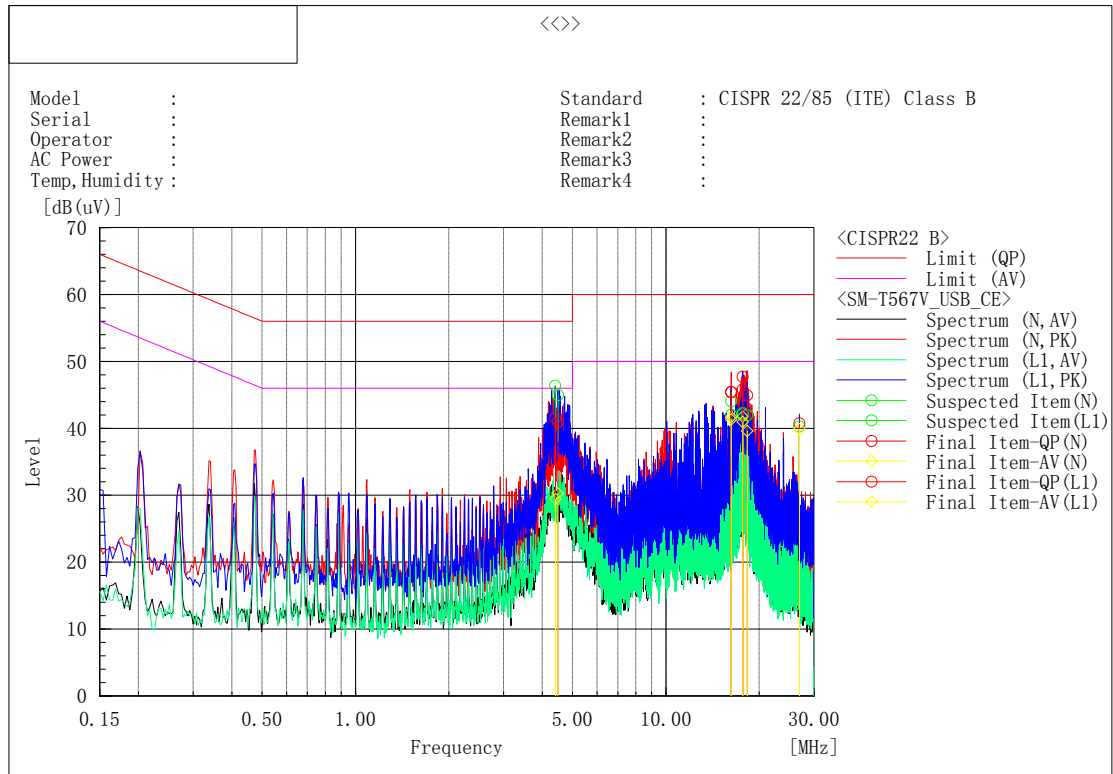

Final Result

--- N Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c. f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]	Remark
1	17.69382	37.6	31.6	10.1	47.7	41.7	60.0	50.0	12.3	8.3	
2	16.22956	35.3	31.6	10.1	45.4	41.7	60.0	50.0	14.6	8.3	
3	26.91664	30.4	29.6	10.3	40.7	39.9	60.0	50.0	19.3	10.1	
4	18.30444	34.8	29.5	10.1	44.9	39.6	60.0	50.0	15.1	10.4	
5	4.48852	31.2	20.5	9.8	41.0	30.3	56.0	46.0	15.0	15.7	

--- L1 Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c. f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]	Remark
1	16.22831	35.3	31.2	10.1	45.4	41.3	60.0	50.0	14.6	8.7	
2	17.69514	35.7	30.9	10.1	45.8	41.0	60.0	50.0	14.2	9.0	
3	4.41102	31.8	19.6	9.8	41.6	29.4	56.0	46.0	14.4	16.6	

Note) Level (Quasi-Peak and/or Average) = Meter Reading (Quasi-Peak and/or Average) + Factor (LISN Insertion Loss + Cable Loss)

Margin = Limit – Level (Quasi-Peak and/or Average)

5.2 Radiated disturbance

The following data lists the significant emission frequencies, measured levels, correction factors (for antenna and cables), orientation of table, polarization and height of antenna, the corrected reading, the limit, and the amount of margin.

Peak measurements were made over the changeable frequency range 30 MHz to 1 GHz at a measurement distance of 10 m for the following antenna and turntable arrangements:

Antenna Height [cm]	Antenna Polarisation	Resolution Bandwidth [kHz]	Video Bandwidth [kHz]	Turntable position [degrees]
100 ~ 400	Horizontal, Vertical	120	300	Continuous

Measurements within 6 dB of the limit were then maximized by adjusting turntable position.

Final measurements were made using quasi-peak detector.

Peak/CISPR-average measurements were made over the changeable frequency range 1 GHz to 40 GHz or 5th harmonics of the highest frequency in accordance with internal maximum operating frequency at a measurement distance of 3 m for the following antenna and turntable arrangements:

Antenna Height [cm]	Antenna Polarisation	Resolution Bandwidth [MHz]	Video Bandwidth [MHz]	Turntable position [degrees]
100 ~ 400	Horizontal, Vertical	1	3	Continuous

Measurements within 6 dB of the limit were then maximized by adjusting turntable position.

Final measurements were made using peak and CISPR-average detectors.

Limits for radiated disturbance of Class B ITE at a measuring distance of 3 m and 10 m

Frequency range Limits [MHz]	Field Strength		
	3 m [$\mu\text{V/m}$]	3 m [dB($\mu\text{V/m}$)]	10 m [dB($\mu\text{V/m}$)]
30 to 88	100	40.0	29.5
88 to 216	150	43.5	33.0
216 to 960	200	46.0	35.5
Above 960	500	54.0	43.5

Frequency range Limits [MHz]	Peak dB($\mu\text{V/m}$)	Average dB($\mu\text{V/m}$)
1000 to 6000	74	54

Results checked manually; and points close to the limit line were re-measured.

5.2.1 Test instrumentation

30MHz~1GHz

Test instrumentation	Model name	Manufacturer	Serial or Firmware (No./Ver.)	Calibration	
				Date	Interval (Month)
Test Software	EP5/RE	TOYO	V 4.7.10	N/A	N/A
Bi-con Antenna	CBL6112D	TESEQ	29069	2015.03.16	24
EMI Receiver	ESCI	R&S	101026	2015.03.02	12
AMPLIFIER	310N	SONOMA	300911	2014.07.05	12
Ant Mast	MA4000	INN CO	-	N/A	N/A
Mast Controller	CO2000	INN CO	-	N/A	N/A
RF Selector	NS4900N	TOYO	-	N/A	N/A

Above 1G

Test instrumentation	Model name	Manufacturer	Serial or Firmware (No./Ver.)	Calibration	
				Date	Interval (Month)
Test Software	EP5/RE	TOYO	V 4.7.10	N/A	N/A
Broad-Band Horn Antenna	BBHA9120B	Schwarzbeck	520	2014.02.19	24
EMI Receiver	ESU26	R&S	100243	2015.03.02	12
AMPLIFIER	AMF-4D-00500800-18-13P	TOYO	0934	2014.07.05	12
Ant Mast	AUDIX	AUDIX	-	N/A	N/A


5.2.2 Temperature and humidity condition

Test date	2015-07-02	Test engineer	Yamin Liu
Climate condition	Ambient temperature	(23.0 ~ 24.0) °C	Limit (15.0 to 35.0) °C
	Relative humidity	(45 ~ 46) % R.H.	Limit (25.0 to 75.0) % R.H.
	Atmospheric pressure	(102.0 ~ 102.2) kPa	Limit (86.0 to 106.0) kPa
Test place	Semi-Anechoic Chamber		

5.2.3 Test results

☐ Operating Mode 1

- Frequencies below 1 GHz

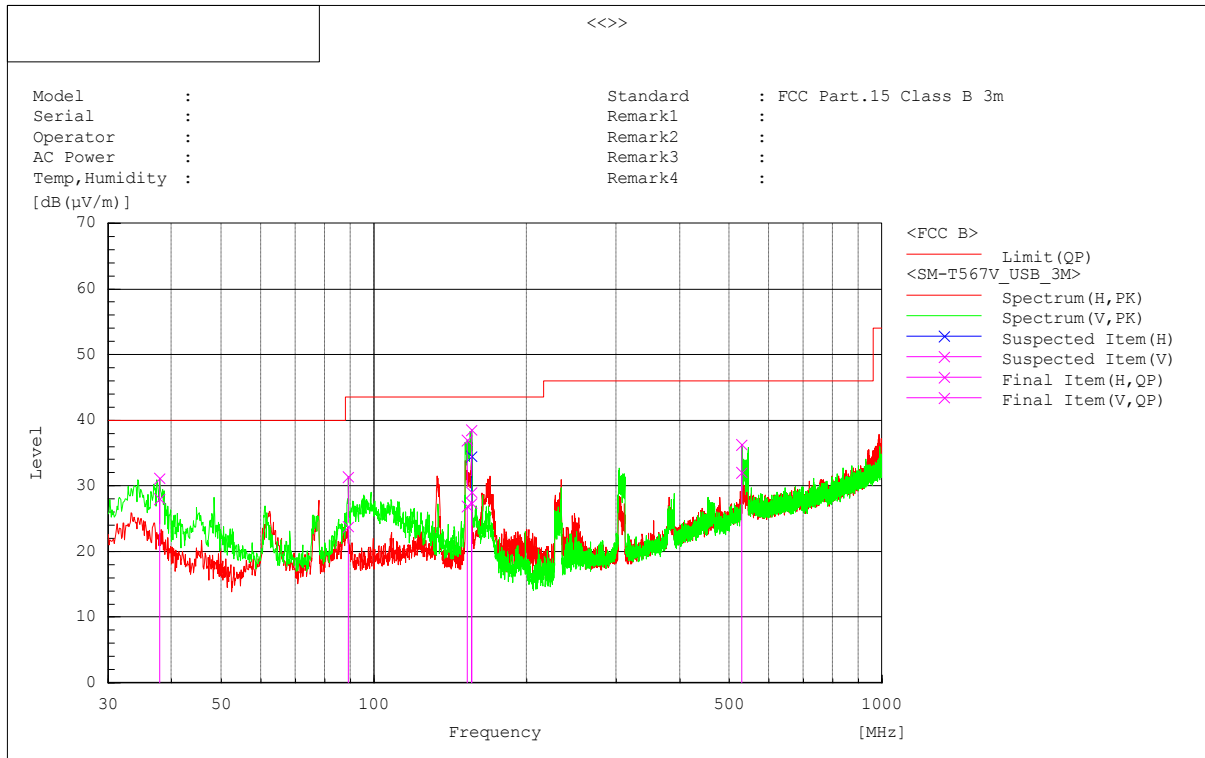

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB (μV)]	c.f [dB (1/m)]	Result QP [dB (μV/m)]	Limit QP [dB (μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	37.881	V	37.9	-9.9	28.0	40.0	12.0	122.0	81.2	
2	529.671	V	33.0	-1.0	32.0	46.0	14.0	139.0	156.6	
3	155.858	V	41.3	-12.3	29.0	43.5	14.5	110.0	274.4	
4	155.494	H	39.6	-12.3	27.3	43.5	16.2	248.0	113.4	
5	152.463	V	39.1	-12.2	26.9	43.5	16.6	167.0	295.2	
6	89.049	V	38.4	-14.6	23.8	43.5	19.7	182.0	89.3	

Note) Receiving antenna polarization : Horizontal and/or Vertical


Test Distance : 3m, Antenna Height : 1 to 4 meters

Result (Quasi-Peak) = Reading QP + C.F (Antenna Factor + Cable Loss - Amp. Gain)

Margin QP (Quasi-Peak) = Limit – Level QP

QP = Quasi-Peak, c.f = Correction Factor

- Frequencies above 1 GHz

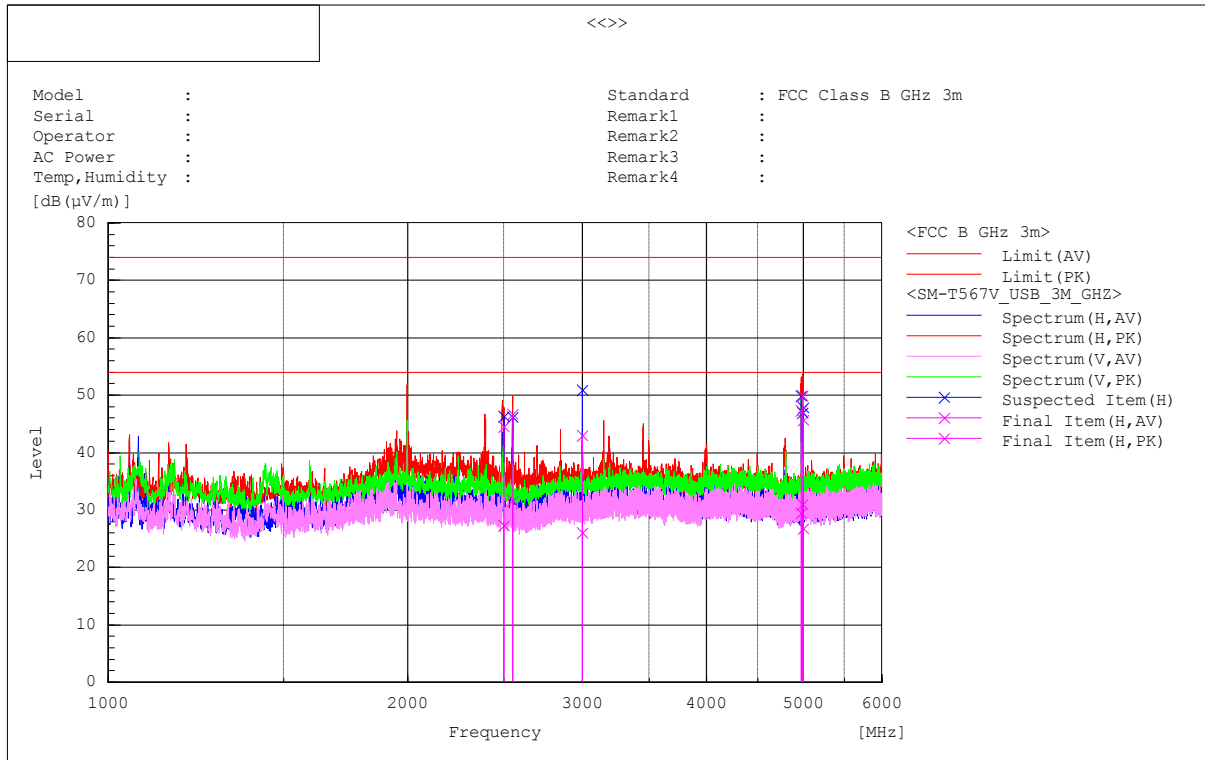

Final Result

No.	Frequency [MHz]	(P)	Reading AV [dB (μV)]	Reading PK [dB (μV)]	c.f [dB (1/m)]	Result AV [dB (μV/m)]	Result PK [dB (μV/m)]	Limit AV [dB (μV/m)]	Limit PK [dB (μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [°]	Remark
1	2550.033	H	47.1	62.2	-15.5	31.6	46.7	54.0	74.0	22.4	27.3	165.0	285.1	
2	4995.012	H	41.7	60.6	-10.7	31.0	49.9	54.0	74.0	23.0	24.1	127.0	341.5	
3	4979.378	H	40.2	58.1	-10.7	29.5	47.4	54.0	74.0	24.5	26.6	108.0	340.1	
4	2499.378	H	42.6	59.8	-15.3	27.3	44.5	54.0	74.0	26.7	29.5	186.0	221.8	
5	4999.369	H	37.5	56.4	-10.7	26.8	45.7	54.0	74.0	27.2	28.3	154.0	336.0	
6	2997.536	H	40.0	57.0	-14.0	26.0	43.0	54.0	74.0	28.0	31.0	124.0	248.6	

Note) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3m, Antenna Height : 1 to 4 meters

Result (Average) = Reading AV + C.F (Antenna Factor + Cable Loss - Amp. Gain)

Margin AV (Average) = Limit – Result AV