verify No.307888960249

위변조방지/진위확인
www.docuqr.com

TEST REPORT

KCTL KCTL Inc.
65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

1. Client

- Name : Samsung Electronics Co., Ltd.
- Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
- Date of Receipt : 2020-08-31

2. Use of Report : Certification

3. Name of Product / Model : Tablet PC / SM-T577U/DS

4. Manufacturer / Country of Origin : Samsung Electronics Co., Ltd. / Vietnam

5. FCC ID : A3LSMT577U

6. IC Certificate No. : 649E-SMT577U

7. Date of Test : 2020-07-14 to 2020-09-28

8. Location of Test : ■ Permanent Testing Lab □ On Site Testing (Address: Address of testing location)

9. Test method used : FCC Part 15 Subpart E, 15.407
RSS-247 Issue 2 February 2017
RSS GEN Issue 5 March 2019

10. Test Results : Refer to the test result in the test report

	Tested by	Technical Manager
Affirmation	Name : Taeyoung Kim (Signature)	Name : Seungyong Kim (Signature)

2020-10-06

KCTL Inc.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.

REPORT REVISION HISTORY

Date	Revision	Page No
2020-10-06	Originally issued	-

This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

General remarks for test reports

Nothing significant to report.

CONTENTS

1. General information 4
2. Device information 4
2.1. Accessory information 6
2.2. Frequency/channel operations....6
3. Introduction....7
3.1 Difference 7
3.2 Reference Detail 8
4. Summary of tests....9
5 Test results 10
5.1. DFS (Dynamic Frequency Selection)....10
6. Measurement equipment 19

1. General information

Client	:	Samsung Electronics Co., Ltd.
Address	:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
Manufacturer	:	Samsung Electronics Co., Ltd.
Address	:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
Factory	:	Samsung Electronics Vietnam Thai Nguyen Co., Ltd (SEVT)
Address	:	Yen binh Industrial Park, Dong Tien Ward, Pho Yen Town Thai Nguyen Province, Vietnam
Laboratory	:	KCTL Inc.
Address	:	65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
Accreditations	:	FCC Site Designation No: KR0040, FCC Site Registration No: 687132 VCCI Registration No. : R-20080, G-20078, C-20059, T-20056 Industry Canada Registration No. : 8035A KOLAS No.: KT231

2. Device information

Equipment under test	:	Tablet PC
Model	:	SM-T577U/DS
Modulation technique	:	Bluetooth(BDR/EDR)_ GFSK, π/4DQPSK, 8DPSK Bluetooth(BLE)_GFSK WIFI(802.11a/b/g/n/ac/ax)_DSSS, OFDM, OFDMA NFC_ASK LTE_QPSK, 16QAM, 64QAM WCDMA_QPSK GSM_GMSK, 8-PSK
Number of channels	:	Bluetooth(BDR/EDR)_79 ch / Bluetooth(BLE)_40 ch 802.11b/g/n/ac/ax_HT20/VHT20/HE20 : 11 ch UNII-1: 4 ch (20 ㎒), 2 ch (40 ㎒), 1 ch (80 ㎒) UNII-2A: 4 ch (20 ㎒), 2 ch (40 ㎒), 1 ch (80 ㎒) UNII-2C: 12 ch (20 ㎒), 6 ch (40 ㎒), 3 ch (80 ㎒) UNII-3: 5 ch (20 ㎒), 2 ch (40 ㎒), 1 ch (80 ㎒) NFC: 1 ch
Power source	:	DC 3.85 Ⅴ
Antenna specification	:	LTE/WCDMA_LDS carrier Antenna WIFI/Bluetooth(BDR/EDR/BLE)_LDS carrier Antenna NFC_FPCB Antenna

This test report shall not be reproduced, except in full, without the written approval

Antenna gain	:	WIFI/Bluetooth(BDR/EDR/BLE): ANT 1: -2.50 dBi, ANT 2: -2.50 dBi UNII-1 ANT 1: -3.20 dBi, ANT 2: -3.70 dBi UNII-2A ANT 1: -3.20 dBi, ANT 2: -3.80 dBi UNII-2C ANT 1: -6.20 dBi, ANT 2: -6.70 dBi UNII-3 ANT 1: -6.50 dBi, ANT 2: -6.40 dBi
Frequency range	:	Bluetooth(BDR/EDR/BLE)_2 402 ㎒ ~ 2 480 ㎒ 2 412 ㎒ ~ 2 462 ㎒ (802.11b/g/n/ac/ax_HT20/VHT20/HE20) UNII-1: 5 180 ㎒ ~ 5 240 ㎒ (802.11a/n/ac/ax_HT20/VHT20/HE20) UNII-1: 5 190 ㎒ ~ 5 230 ㎒ (802.11n/ac/ax_HT40/VHT40/HE40) UNII-1: 5 210 ㎒ (802.11ac/ax_VHT80/HE80) UNII-2A: 5 260 ㎒ ~ 5 320 ㎒ (802.11a/n/ac/ax_HT20/VHT20/HE20) UNII-2A: 5 270 ㎒ ~ 5 310 ㎒ (802.11n/ac/ax_HT40/VHT40/HE40) UNII-2A: 5 290 ㎒ (802.11ac/ax_VHT80/HE80) UNII-2C: 5 500 ㎒ ~ 5 720 ㎒ (802.11a/n/ac/ax_HT20/VHT20/HE20) UNII-2C: 5 510 ㎒ ~ 5 710 ㎒ (802.11n/ac/ax_HT40/VHT40/HE40) UNII-2C: 5 530 ㎒ ~ 5 690 ㎒ (802.11ac/ax_VHT80/HE80) UNII-3: 5 745 ㎒ ~ 5 825 ㎒ (802.11a/n/ac/ax_HT20/VHT20/HE20) UNII-3: 5 755 ㎒ ~ 5 795 ㎒ (802.11n/ac/ax_HT40/VHT40/HE40) UNII-3: 5 775 ㎒ (802.11ac/ax_VHT80/HE80) LTE Band 2_1 850.7 ㎒ ~ 1 909.3 ㎒ LTE Band 4_1 710.7 ㎒ ~ 1 754.3 ㎒ LTE Band 5_824.7 ㎒ ~ 848.3 ㎒ LTE Band 7_2 502.5 ㎒ ~ 2 567.5 ㎒ LTE Band 12_699.7 ㎒ ~ 715.3 ㎒ LTE Band 13_779.5 ㎒ ~ 784.5 ㎒ LTE Band 14_790.5 ㎒ ~ 795.5 ㎒ LTE Band 17_706.5 ㎒ ~ 713.5 ㎒ LTE Band 25_1 850.7 ㎒ ~ 1 914.3 ㎒ LTE Band 26_814.7 ㎒ ~ 848.3 ㎒, 814.7 ㎒ ~ 823.3 ㎒ LTE Band 41_2 498.5 ㎒ ~ 2 687.5 ㎒ (FCC) LTE Band 41_2 502.5 ㎒ ~ 2 687.5 ㎒ (IC) LTE Band 66_1 710.7 ㎒ ~ 1 779.3 ㎒ LTE Band 71_665.5 ㎒ ~ 695.5 ㎒ WCDMA 850_826.4 ㎒ ~ 846.6 ㎒ WCDMA 1700_1 712.4 ㎒ ~ 1 752.6 ㎒ WCDMA 1900_1 852.4 ㎒ ~ 1 907.6 ㎒ NFC_13.56 ㎒
Software version	:	T577U.001
Hardware version	:	REV1.0
Test device serial No.	:	Conducted(R32N601ACHA,R32N601A7VE)
Operation temperature	:	-30 ℃ ~ 50 ℃

2.1. Accessory information

Equipment	Manufacturer	Model	Serial No.	Power source	FCC ID & IC
Travel Adapter	SOLU-M	EP-TA200	R37M12L1A C1HM3	Input : 100-240V, 50-60Hz (0.5A) Output : 9.0V, 1.67A or 5.0V, 2.0A	-
Data Cable	RFTECH	EP-DT725BBE	-	-	-
External Earphone	ALMUS	EHS64AVFBE	-	-	-
Protective Cover	WILLTECH VINA	GH98-45810A	-	-	-
S-Pen	WACOM	CP-913W-00B	-	-	-

2.2. Frequency/channel operations

This device contains the following capabilities:
WiFi (802.11a/b/g/n/ac/ax), Bluetooth (BDR/EDR/BLE), NFC,
LTE Band 2, LTE Band 4, LTE Band 5, LTE Band 7, LTE Band 12, LTE Band 13, LTE Band 14, LTE Band 17, LTE Band 25, LTE Band 26, LTE Band 29 (Downlink only), LTE Band 41 (PC2, PC3), LTE Band 66, LTE Band 71, WCDMA 850, WCDMA 1700, WCDMA 1900

UNII-2A		UNII-2C	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
52	5 260	100	5 500
56	5 280	120	5 600
64	5 320	140	5 700
		144	5 720

Table 2.2-1. 802.11a/n/ac_HT20/VHT20 mode

UNII-2A		UNII-2C	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
54	5 270	102	5 510
62	5 310	118	5 590
		134	5 670
		142	5 710

Table 2.2-2. 802.11n/ac_HT40/VHT40 mode

UNII-2A		UNII-2C	
Ch.	Frequency (㎒)	Ch.	Frequency (㎒)
58	5 290	106	5 530
		122	5 610
		138	5 690

Table 2.2-3 802.11ac_VHT80 mode

Notes:

1. The device supports DFS bands between UNII-2A and UNII-2C and operates as a slave device controlled by master.

3. Introduction

This report referenced from the FCC ID : A3LSMT575
Based on their similarity, the FCC Part 15C (equipment class: NII) reuses the original model's result and do spot-check, following the FCC KDB 484596 D01 v01.
And the applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID.

3.1 Difference

The FCC ID: A3LSMT577U shares the same enclosure and circuit board as FCC ID: A3LSMT575. The WIFI/BT/BLE/NFC/WCDMA/LTE antenna and surrounding circuitry and layout are identical between these two units.
As for all bands, they have been verified and the parent model test results under FCC ID : A3LSMT575 shall remain representative of FCC ID : A3LSMT577U.

Note. The Product equality letter includes detailed information about the differences between FCC ID: A3LSMT575 and FCC ID: A3LSMT577U.

3.2 Reference Detail

Reference application that contains the reused reference data in the individual test reports.

Equipment Class	Reference FCC ID	Application Type	Reference Test report Number	Exhibit Type	Variant Test Report Number	Data Re-used
DTS	A3LSMT575	Original	KP20-SRF0209 (802.11b/g/n/ac)	Test report	KR20-SRF0255	All
			KP20-SRF0214 (802.11ax)	Test report	KR20-SRF0256	All
			KP20-SRF0208 (Bluetooth LE)	Test report	KR20-SRF0253	All
DSS	A3LSMT575	Original	KP20-SRF0207 (Bluetooth)	Test report	KR20-SRF0252	All
NII	A3LSMT575	Original	KP20-SRF0210 (802.11a/n/ac)	Test report	KR20-SRF0257	All
			KP20-SRF0215 (802.11ax)	Test report	KR20-SRF0258	All
			KR20-SRF0216 (DFS)	Test report	KR20-SRF0259	All
DXX	A3LSMT575	Original	KP20-SRF0211 (NFC)	Test report	KR20-SRF0254	All
PCB	A3LSMT575	Original	KP20-SRF0212 (2G, 3G)	Test report	KR20-SRF0260	Partial
			KP20-SRF0213 (LTE)	Test report	KR20-SRF0261	Partial

For this application the data reuse is summarized below for each equipment class

Equipment Class	Reference FCC ID	Application Type	Test Item	Data Re-used
DTS	A3LSMT575	Original	WLAN (802.11b/g/n/ac)	All
			WLAN (802.11ax)	All
			Bluetooth LE	All
DSS	A3LSMT575	Original	Bluetooth	All
NII	A3LSMT575	Original	WLAN (802.11a/n/ac)	All
			WLAN (802.11ax)	All
			WLAN (DFS)	All
DXX	A3LSMT575	Original	NFC	All
PCB	A3LSMT575	Original	2G, 3G	All except for 2G
			LTE	Band 66, Band 12, Band 5, Band 13 LTE 41 (PC 3)

4. Summary of tests

FCC Part section(s)	IC Rule Reference	Parameter	Test results
15.407(h)	RSS-247 Issue 2, 6.3	DFS -Channel closing transmission time -Channel move time -Non occupied period	Pass

Notes:

1. The test procedure(s) in this report were performed in accordance as following.
   - KDB 905462 D02 UNII DFS compliance procedure new rules .
   - KDB 905462 D03 UNII client without radar detection new rules.
2. The device does not support radar detection feature.
3. The device does not support channel puncturing for 802.11ax mode

This test report shall not be reproduced, except in full, without the written approval

5 Test results

5.1. DFS (Dynamic Frequency Selection)

Test description

- Applicability of DFS requirements prior to use of a channel

Requirement	Operational Mode		
	Master	Client (without radar detection)	Client (with radar detection)
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

- Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	Master Device or Client with Radar Detection	Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 ㎒ channels and the channel center frequency.		

- Requirements of client devices

a) A Client Device will not transmit before having received appropriate control signals from a Master Device.
b) A Client Device will stop all its transmissions whenever instructed by a Master Device to which it is associated and will meet the Channel Move Time and Channel Closing Transmission Time requirements. The Client Device will not resume any transmissions until it has again received control signals from a Master Device.
c) If a Client Device is performing In-Service Monitoring and detects a Radar Waveform above the DFS Detection Threshold, it will inform the Master Device. This is equivalent to the Master Device detecting the Radar Waveform and d) through f) of section 5.1.1 apply.
d) Irrespective of Client Device or Master Device detection the Channel Move Time and Channel Closing Transmission Time requirements remain the same.
e) The client test frequency must be monitored to ensure no transmission of any type has occurred for 30 minutes. Note: If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy

- DFS Response requirement values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.	

- Interference Threshold values, Master or Client incorporating In-Service Monitoring

Maximum Transmit Power	Value (see note)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

- Radar test waveforms

Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	$\text{Roundup}\left\{\left(\frac{1}{360}\right)\cdot\left(\frac{19\cdot10^6}{PRI_{\mu sec}}\right)\right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.

Note 2: This report was applied Short Pulse Radar Type 0.

*Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μs)	Chirp Width (㎒)	PRI (μs)	Number of Pulses per Burst	Number of Bursts	Minimum percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

*Long Pulse Radar Test Waveform


Radar Waveform	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (㎑)	Hopping Sequence Length (μs)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	0.333	300	70%	30

*Frequency Hopping Radar Test Waveform

KCTL

Test setup

- Setup for Client with injection at the Master

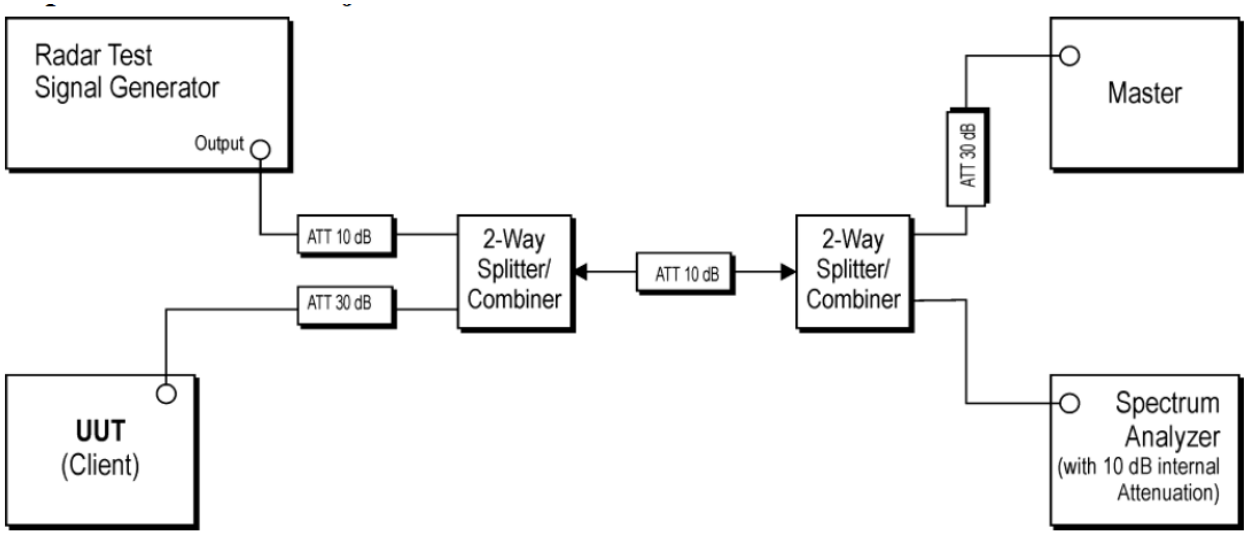

- Spectrum analyzer setting parameter

This setting parameter is shown below and it according to the 905462 D02 UNII DFS Compliance Procedures New Rules.

1) RBW/VBW ≥ 3 ㎒
2) Detector = peak
3) Span = zero span

- Conducted test procedure

1) One frequency will be chosen from the Operating Channels of the UUT within the 5 250-5 350 ㎒ or 5 470-5 725 ㎒ bands.
2) The Client Device (EUT) is set up the above diagram and communications between the Master device and the Client is established.
3) Stream the channel loading test file from the Master Device to the Client Device on the test Channel for the entire period of the test.
4) An additional 1 ㏈ is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.
5) Observe the transmissions of the UUT at the end of the Burst on the Operating Channel for duration greater than 12 seconds for Radar Type 0 to ensure detection occurs.
6) After the initial radar burst the channel is monitored for 30 minutes to ensure no transmissions or beacons occur. A second monitoring setup is used to verify that the Master and Client have both moved to different channels.


- Master device information

Equipment Name	Manufacturer	Model No.	Serial No.	FCC ID
Access Point	ASUSTeK Computer Inc	RT-AX88U	J9IAHP000993	MSQ-RTAXHP00


Test result

Plot of radar waveform

5 290 ㎒

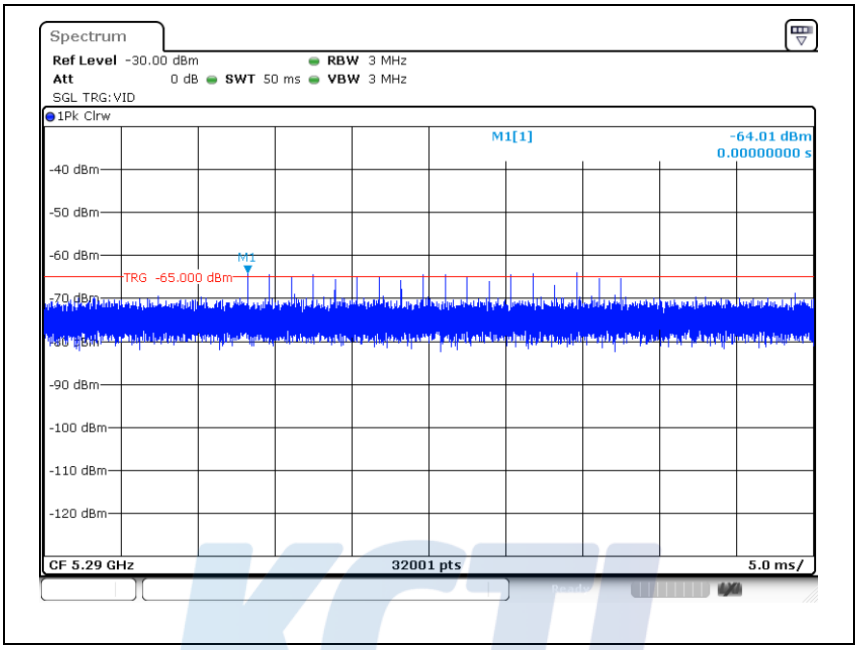


5 530 ㎒

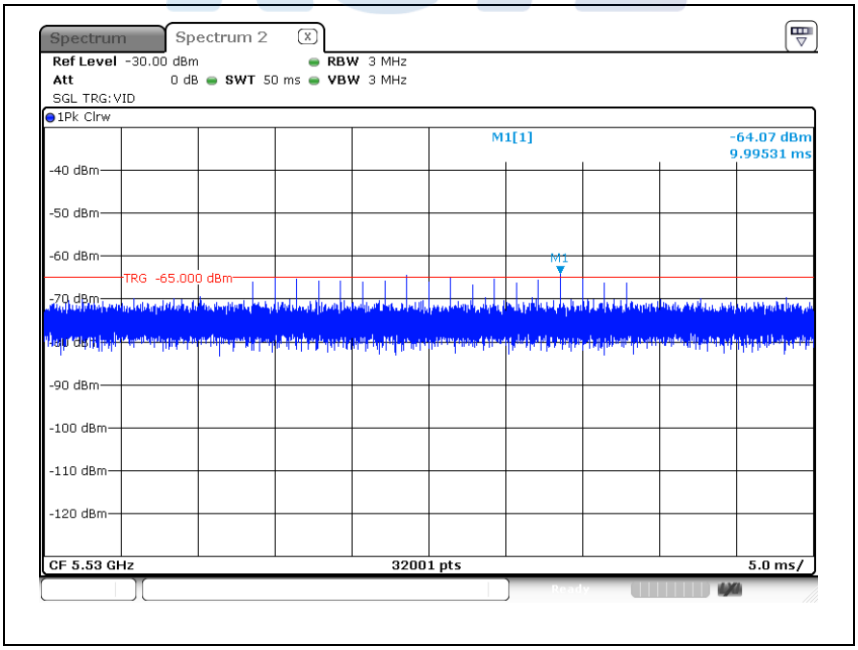


Plot of LAN traffic


5 290 ㎒

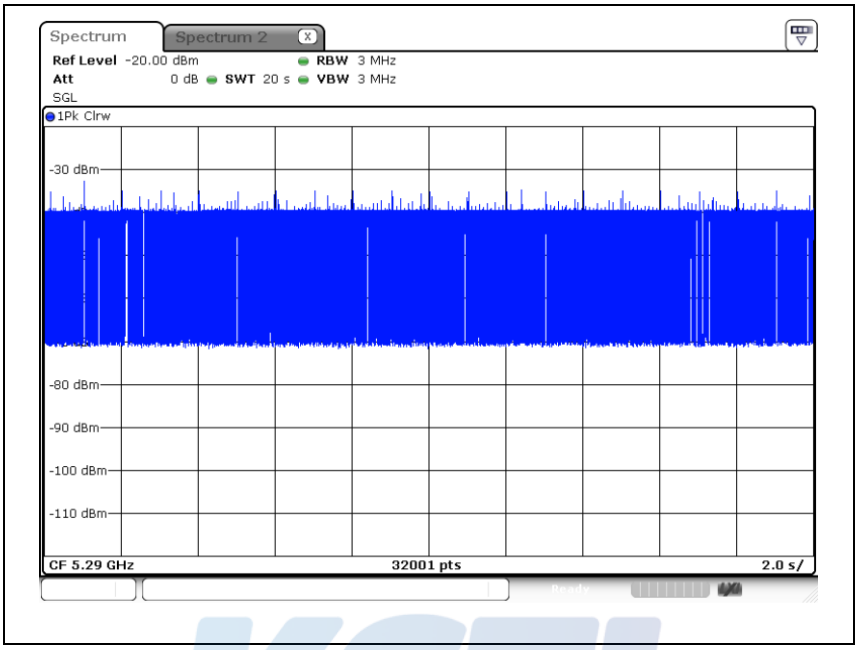

5 530 ㎒

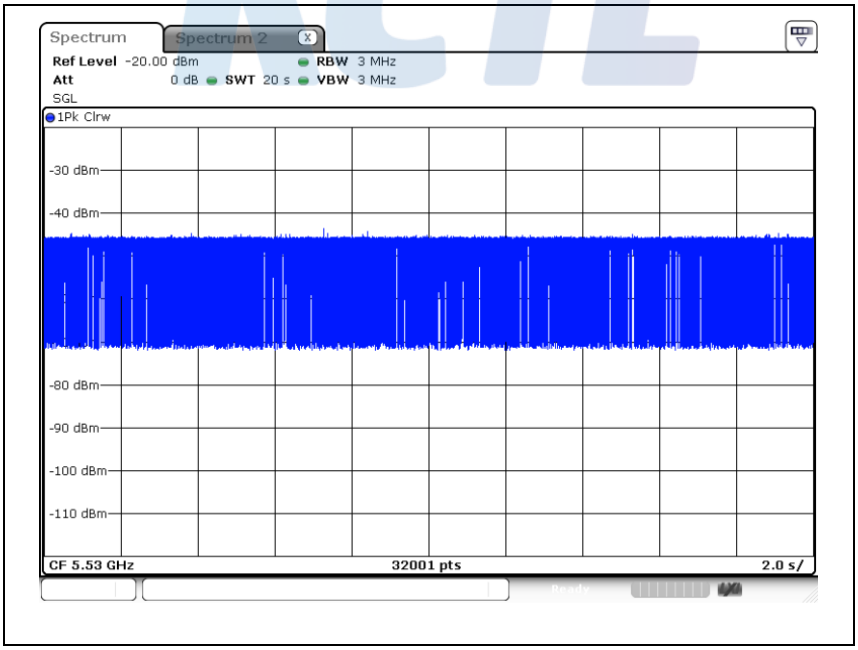


Plot of channel move time and aggregate time

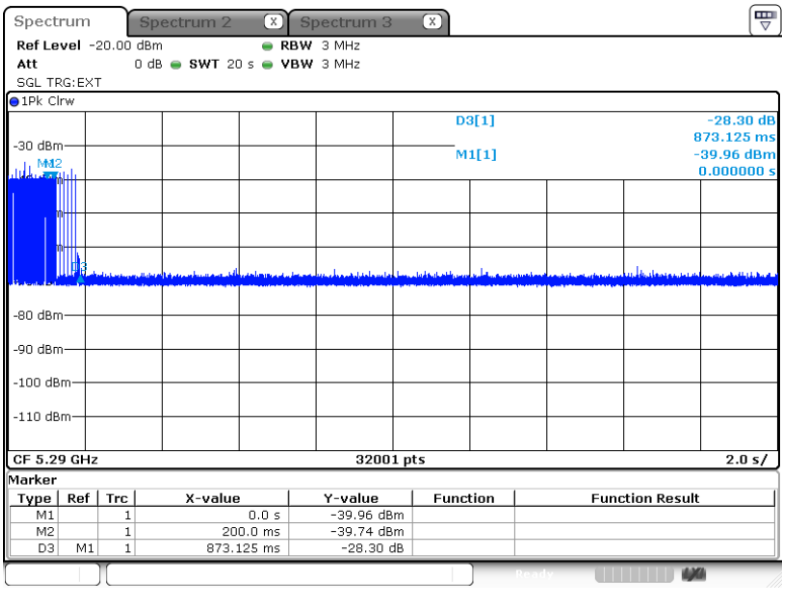

Channel move time = 0.873 125 s
Closing time = 0.000 625 s x 57 = 0.035 625 s
(Closing time : Burst unit time(20 s / 32 001 points) * Number of burst(between 2 markers))

UNII-2A: 802.11 ac VHT80, 5 290 ㎒

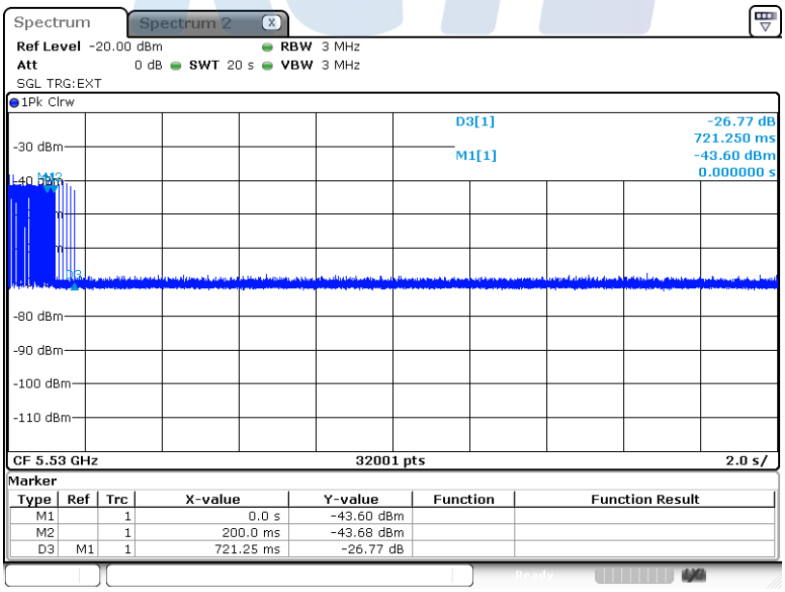


Channel move time = 0.721 250 s
Closing time = 0.000 625 s x 23 = 0.014 375 s
(Closing time : Burst unit time(20 s / 32 001 points) * Number of burst(between 2 markers))


UNII-2C: 802.11 ac VHT80, 5 530 ㎒

Plot of Non-occupancy period

5 290 ㎒

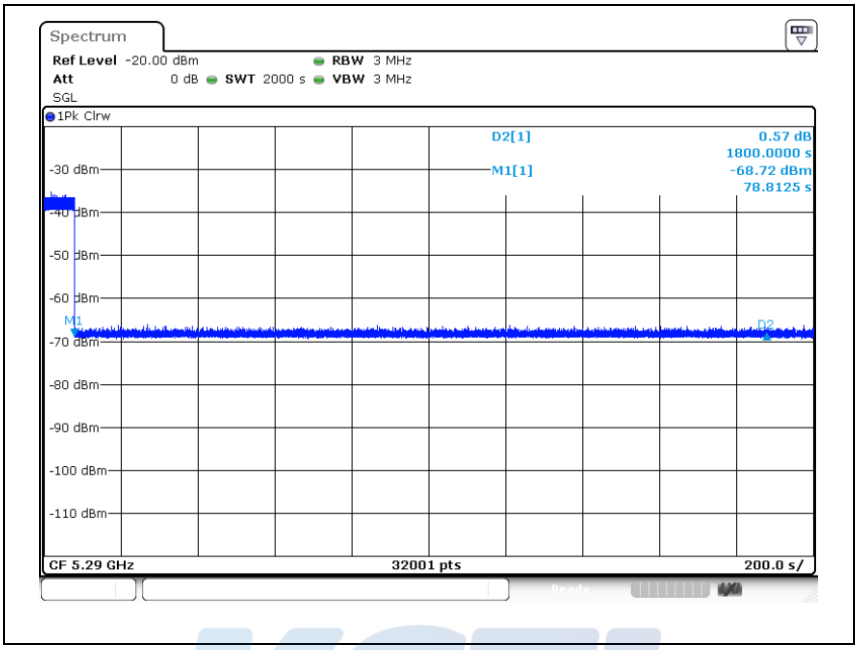

5 530 ㎒

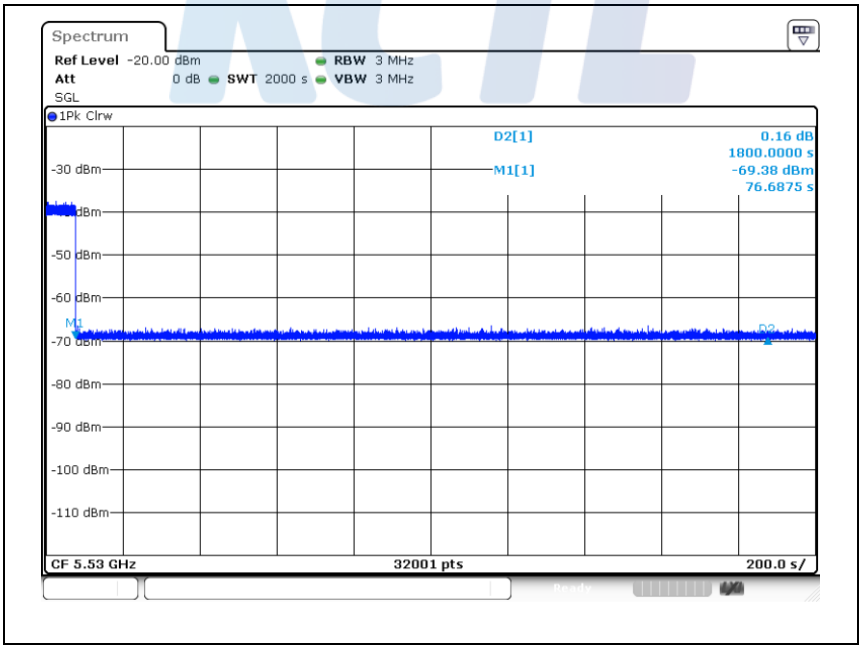

6. Measurement equipment

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
Spectrum Analyzer	R&S	FSV30	100806	21.07.29*
Power Divider	Aeroflex / Weinschel, Inc	1580-1	RZ184	21.01.06
Power Divider	Agilent	11636B	54456	21.01.06
Attenuator	API Inmet	40AH2W-10	10	21.07.29*
Attenuator	API inmet	40AH2W-10	17	21.05.12
Step Attenuator	HP	8496A	3308A16640	21.07.28*
Step Attenuator	AGILENT	8495D	MY42144296	21.01.22
Signal Generator	R&S	SMB100A	176206	21.01.21
Vector Signal Generator	R&S	SMBV100A	257566	21.07.13

* Tests related to this equipment were progressed after the calibration was completed.

End of test report

This test report shall not be reproduced, except in full, without the written approval