7.5 Maximum Power Spectral Density – 802.11a/n/ac

§15.407(a.1)(2.5)

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01r02, and at the appropriate frequencies. Method SA-1, as defined in KDB 789033 D02 v01r02, was used to measure the power spectral density.

In the 5.15 – 5.25GHz, 5.25 – 5.35GHz, 5.47 – 5.725GHz bands, the maximum permissible power spectral density is 11dBm/MHz.

In the 5.725 – 5.850GHz band, the maximum permissible power spectral density is 30dBm/500kHz.

Test Procedure Used

KDB 789033 D02 v01r02 – Section F
KDB 662911 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points ≥ 2 x (span/RBW)
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes

None

© 2016 PCTEST Engineering Laboratory, Inc.

Antenna-1 Power Spectral Density Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/MHz]	Margin [dB]	Pass / Fail
Band 1	5180	36	a	6	2.63	11.0	-8.37	Pass
	5200	40	a	6	2.60	11.0	-8.40	Pass
	5240	48	a	6	2.34	11.0	-8.66	Pass
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	2.37	11.0	-8.63	Pass
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	2.74	11.0	-8.26	Pass
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	2.92	11.0	-8.08	Pass
	5190	38	n (40MHz)	13.5/15 (MCS0)	0.25	11.0	-10.75	Pass
	5230	46	n (40MHz)	13.5/15 (MCS0)	0.32	11.0	-10.68	Pass
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	-3.66	11.0	-14.66	Pass
Band 2A	5260	52	a	6	2.43	11.0	-8.57	Pass
	5280	56	a	6	2.16	11.0	-8.84	Pass
	5320	64	a	6	2.23	11.0	-8.77	Pass
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	2.99	11.0	-8.01	Pass
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	2.68	11.0	-8.32	Pass
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	2.52	11.0	-8.48	Pass
	5270	54	n (40MHz)	13.5/15 (MCS0)	0.22	11.0	-10.78	Pass
	5310	62	n (40MHz)	13.5/15 (MCS0)	-0.44	11.0	-11.44	Pass
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	-3.69	11.0	-14.69	Pass
Band 2C	5500	100	a	6	2.01	11.0	-8.99	Pass
	5600	120	a	6	1.72	11.0	-9.28	Pass
	5720	144	a	6	2.40	11.0	-8.60	Pass
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	2.67	11.0	-8.33	Pass
	5600	120	n (20MHz)	6.5/7.2 (MCS0)	2.71	11.0	-8.29	Pass
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	2.68	11.0	-8.32	Pass
	5510	102	n (40MHz)	13.5/15 (MCS0)	0.42	11.0	-10.58	Pass
	5590	118	n (40MHz)	13.5/15 (MCS0)	0.39	11.0	-10.61	Pass
	5710	142	n (40MHz)	13.5/15 (MCS0)	0.00	11.0	-11.00	Pass
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	-3.99	11.0	-14.99	Pass
	5610	122	ac (80MHz)	29.3/32.5 (MCS0)	-3.87	11.0	-14.87	Pass
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	-6.97	11.0	-17.97	Pass

Table 7-17. Bands 1, 2A, 2C Conducted Power Spectral Density Measurements

© 2016 PCTEST Engineering Laboratory, Inc.

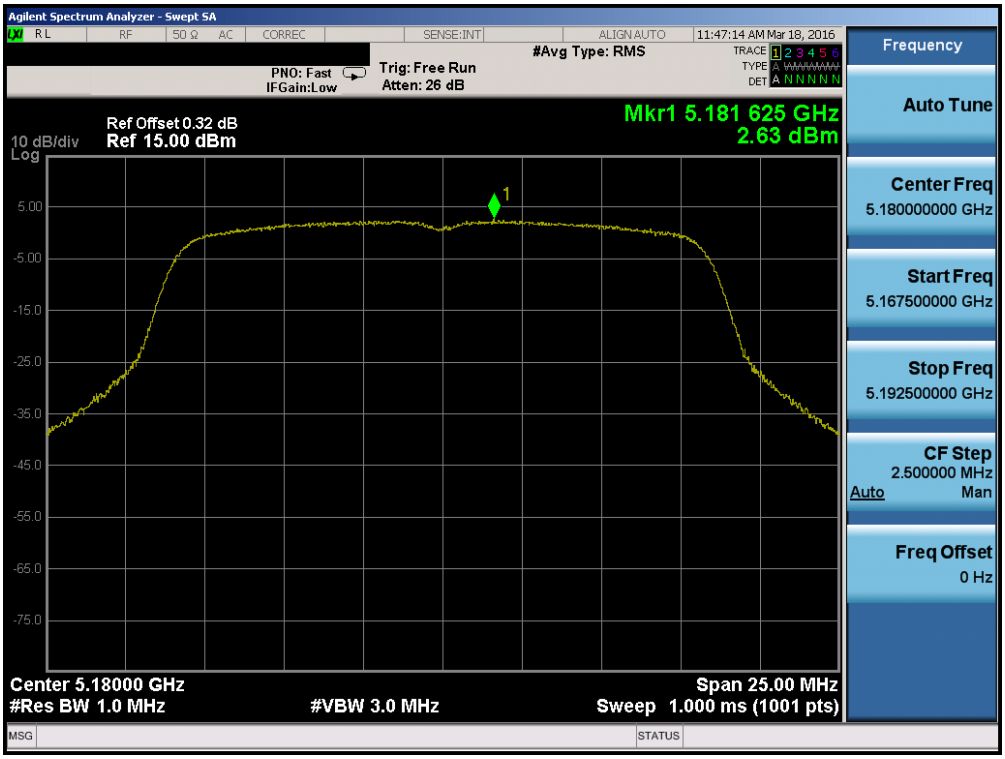

Plot 7-79. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 36)

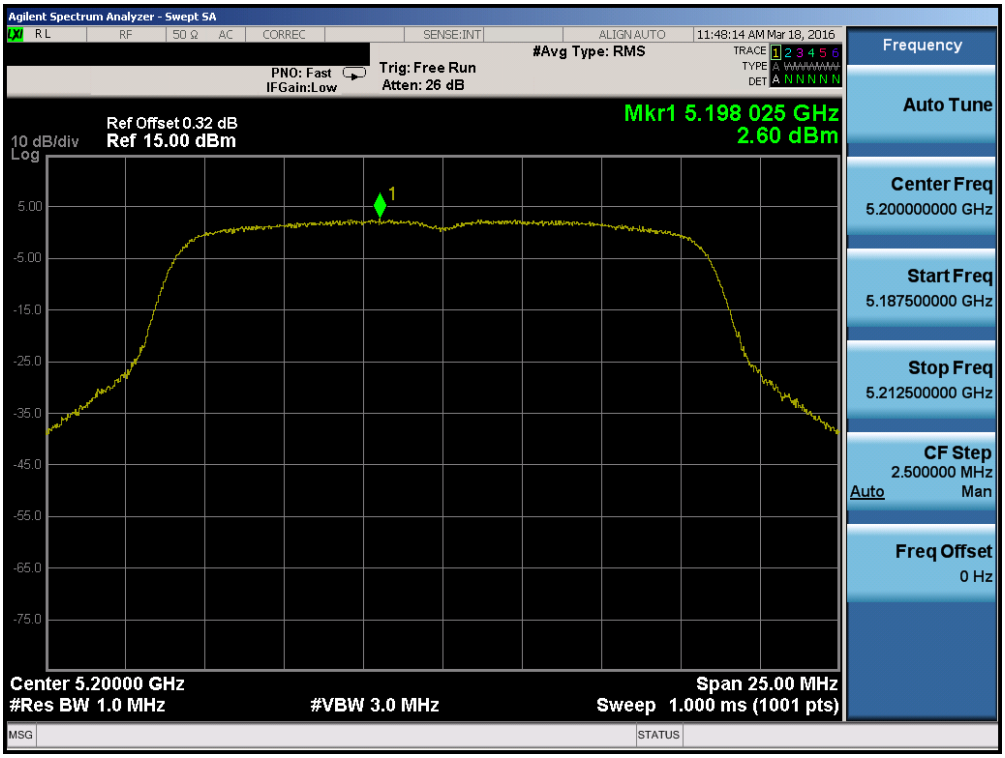

Plot 7-80. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 40)

© 2016 PCTEST Engineering Laboratory, Inc.

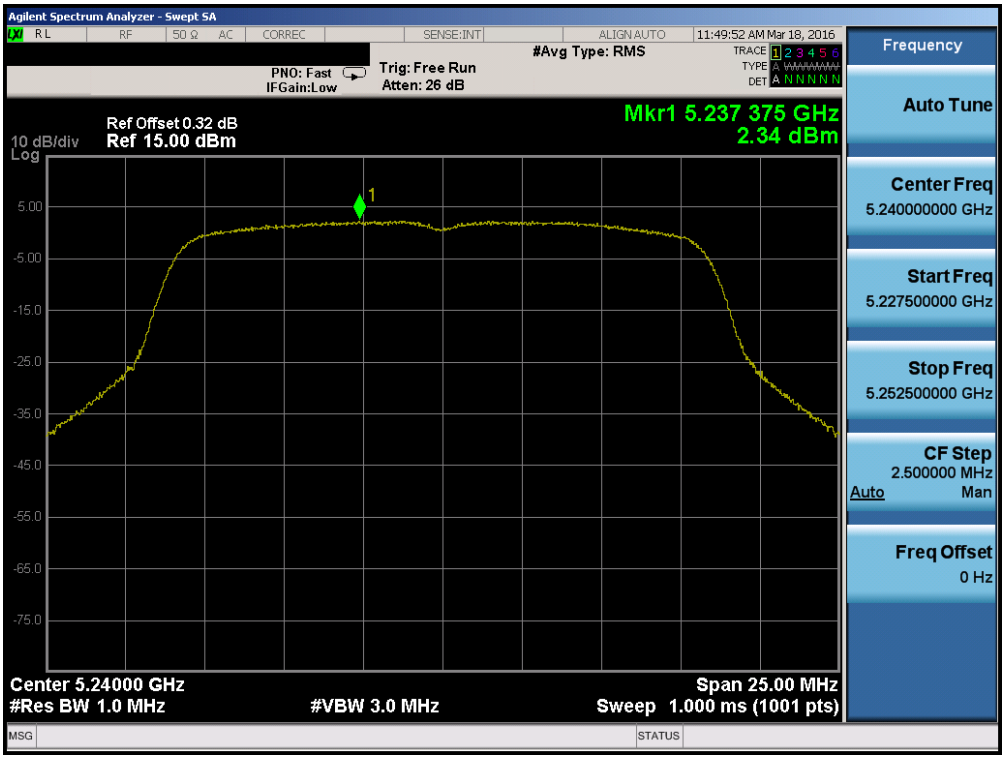

Plot 7-81. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 48)

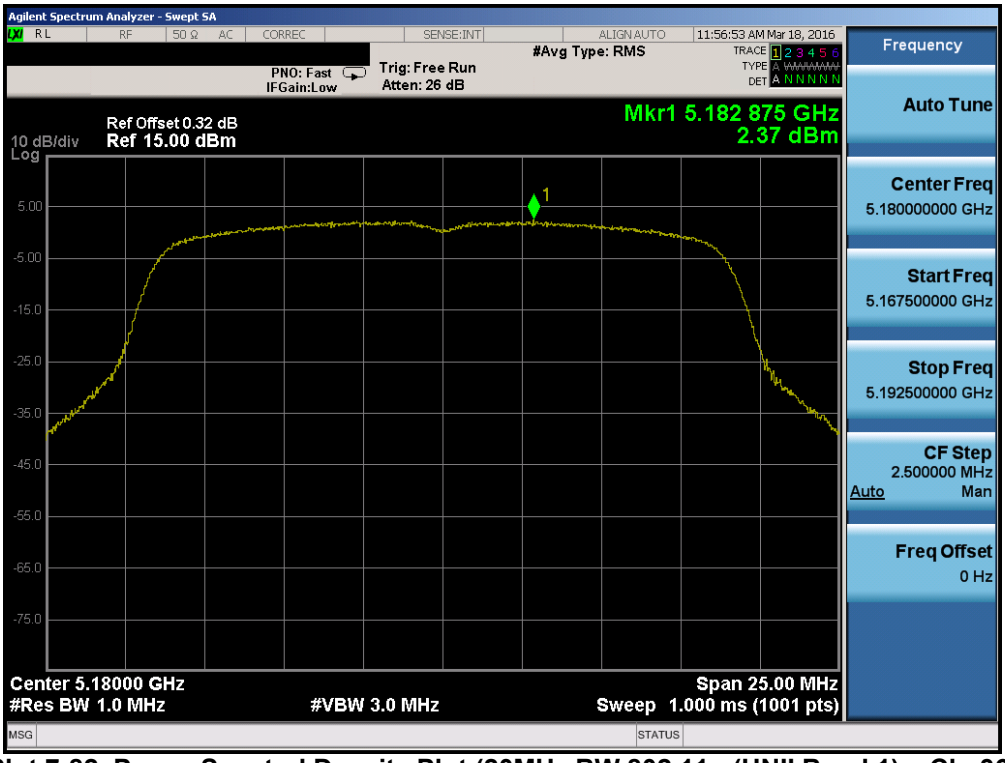

Plot 7-82. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

© 2016 PCTEST Engineering Laboratory, Inc.

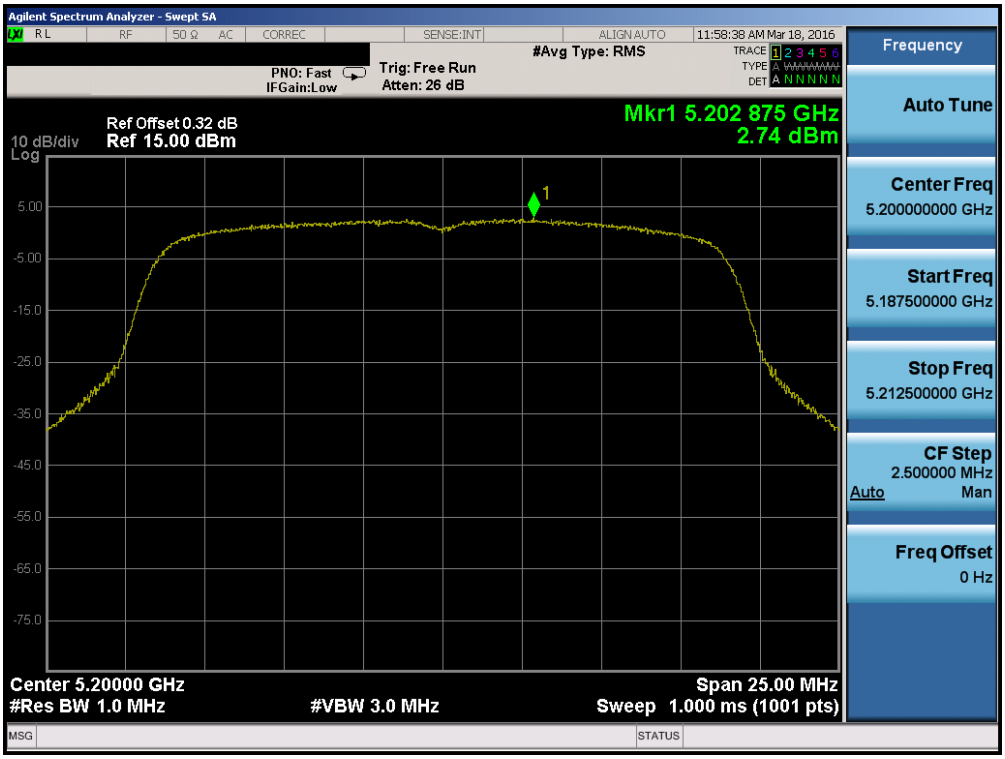

Plot 7-83. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

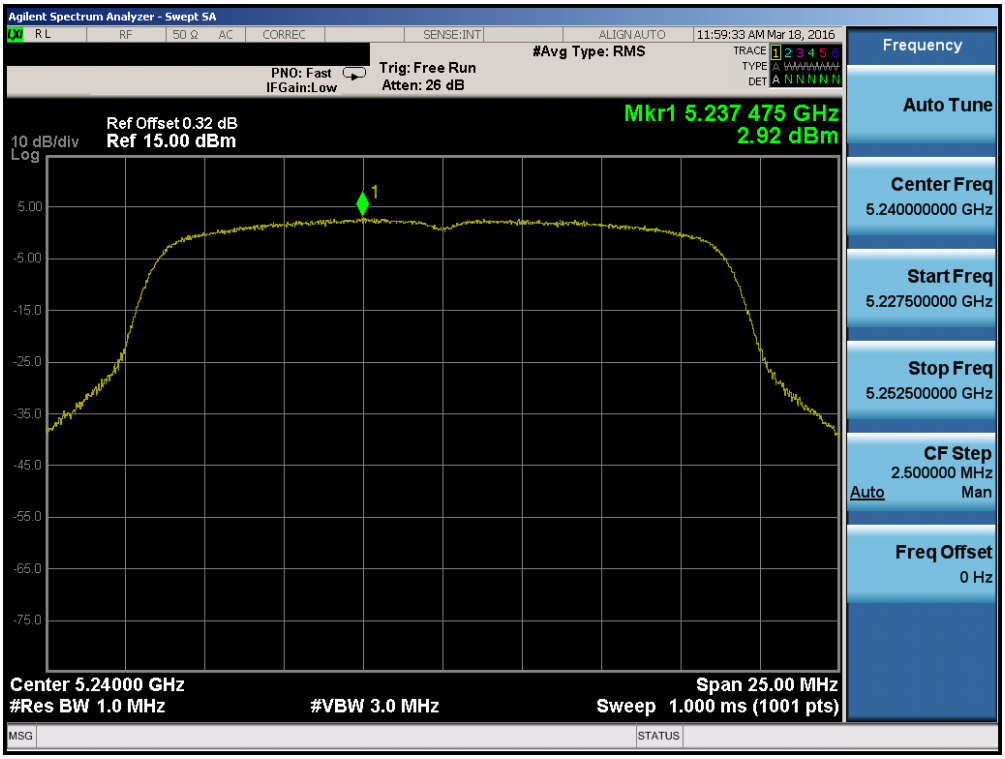

Plot 7-84. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

© 2016 PCTEST Engineering Laboratory, Inc.

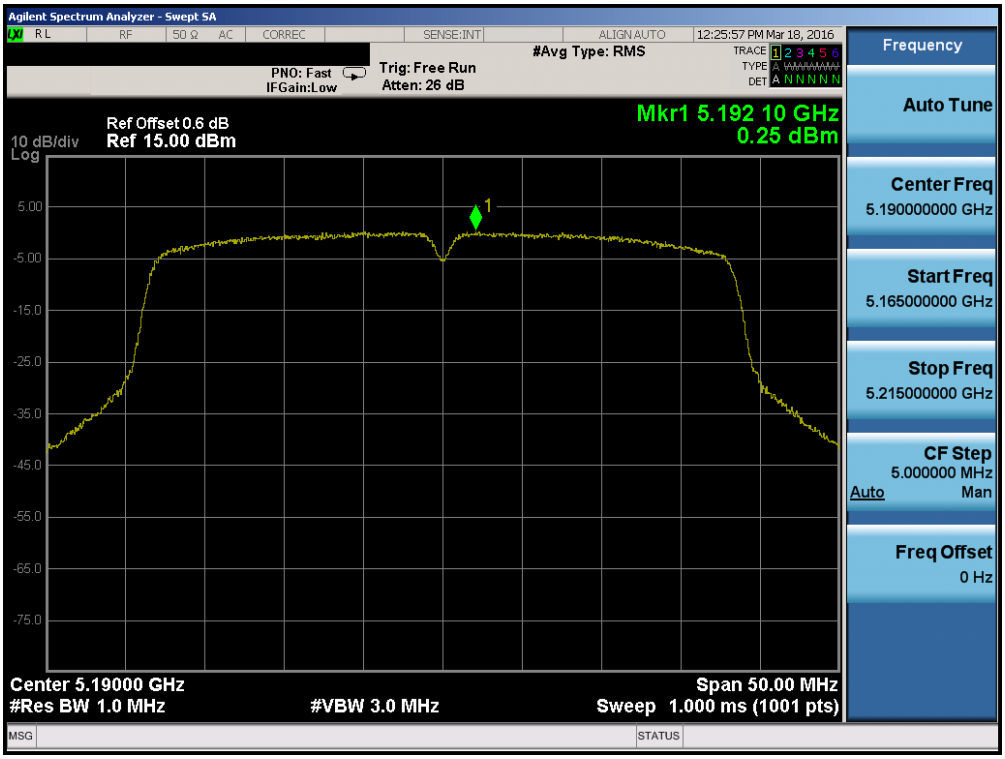

Plot 7-85. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

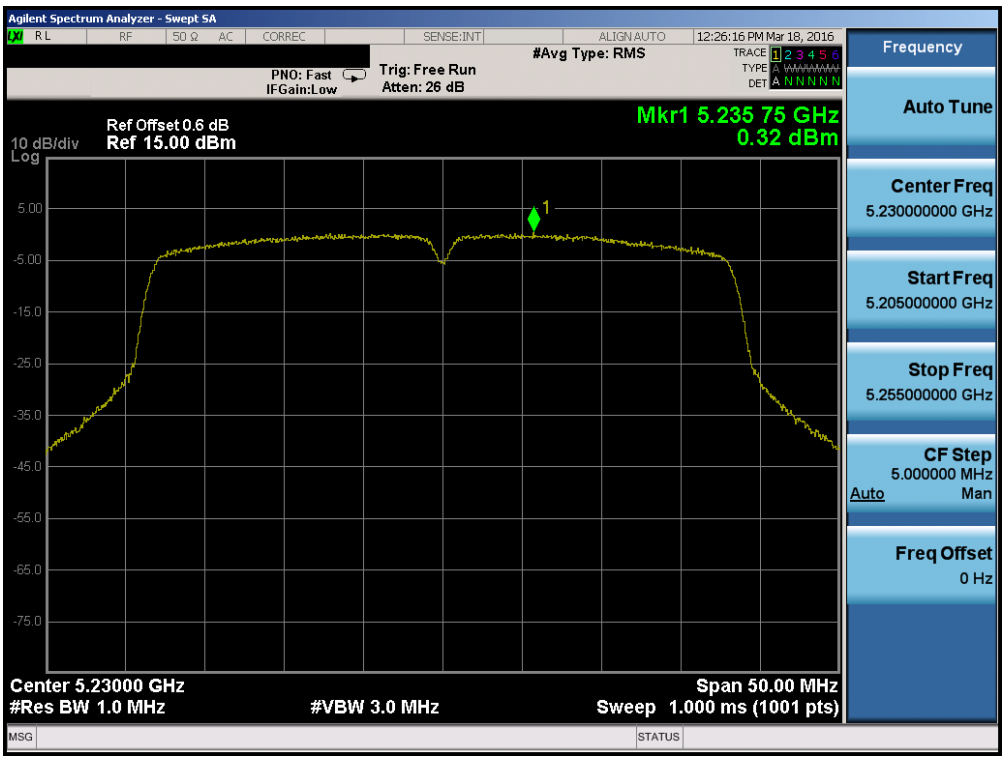

Plot 7-86. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

© 2016 PCTEST Engineering Laboratory, Inc.

Plot 7-87. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

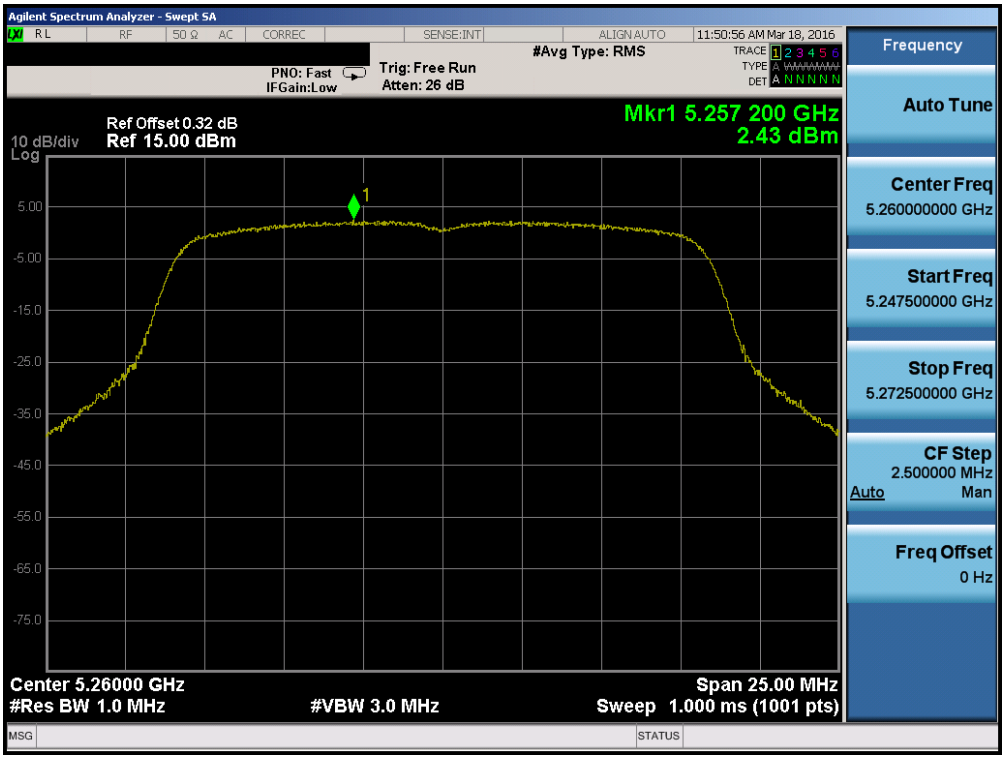

Plot 7-88. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 52)

© 2016 PCTEST Engineering Laboratory, Inc.

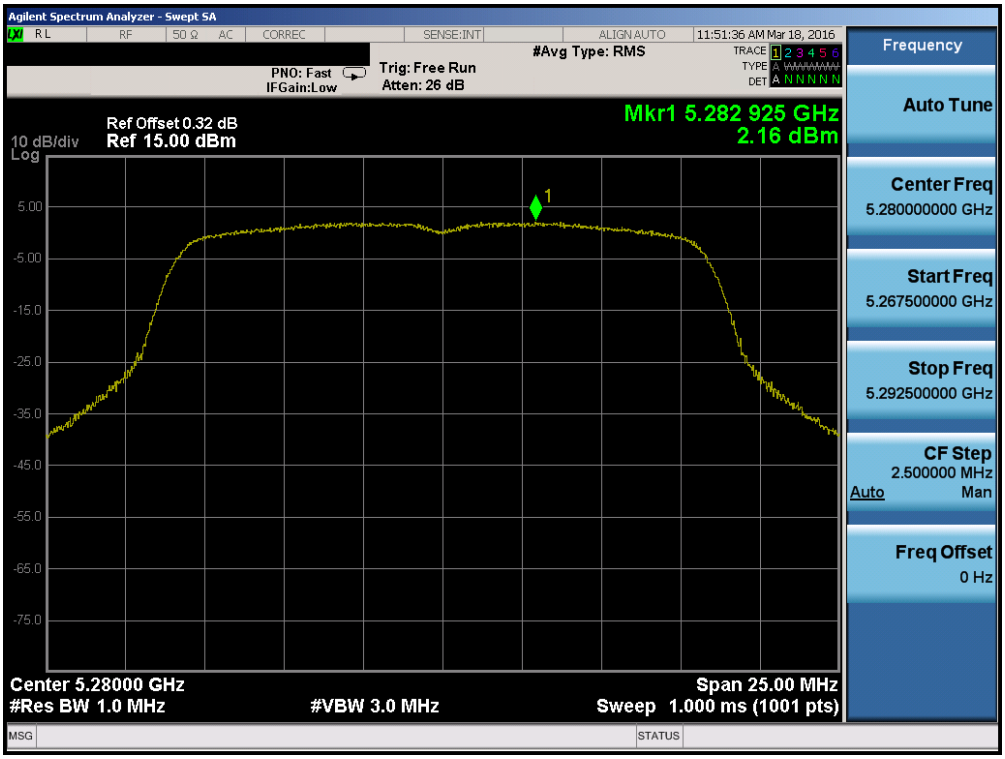

Plot 7-89. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 56)

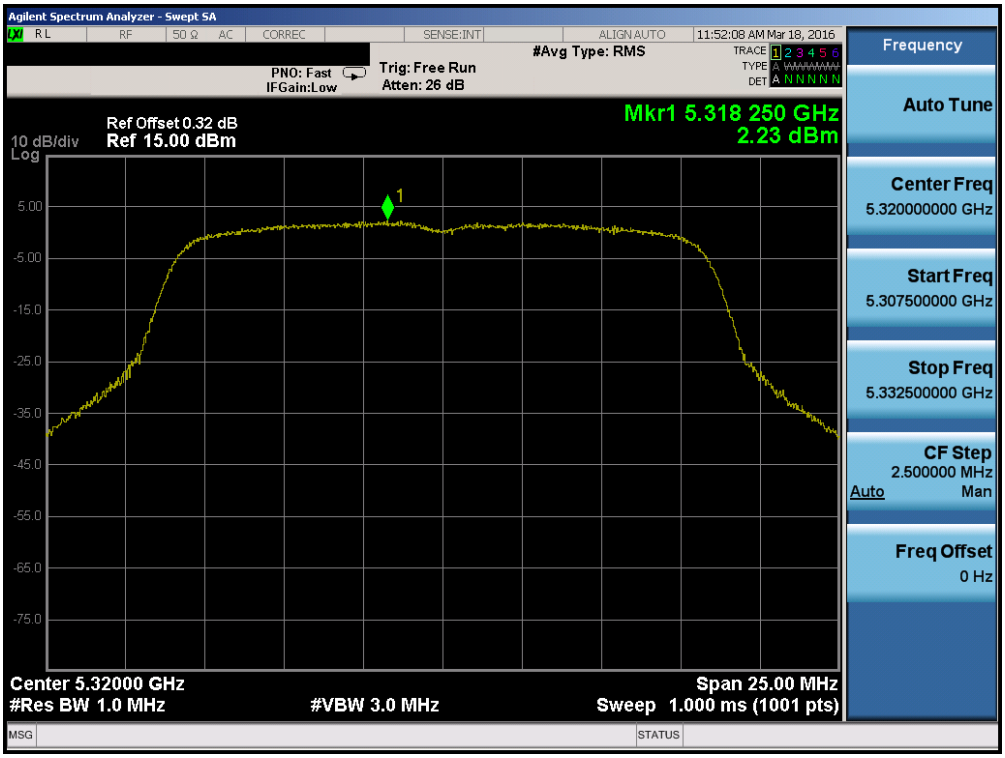

Plot 7-90. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 64)

© 2016 PCTEST Engineering Laboratory, Inc.

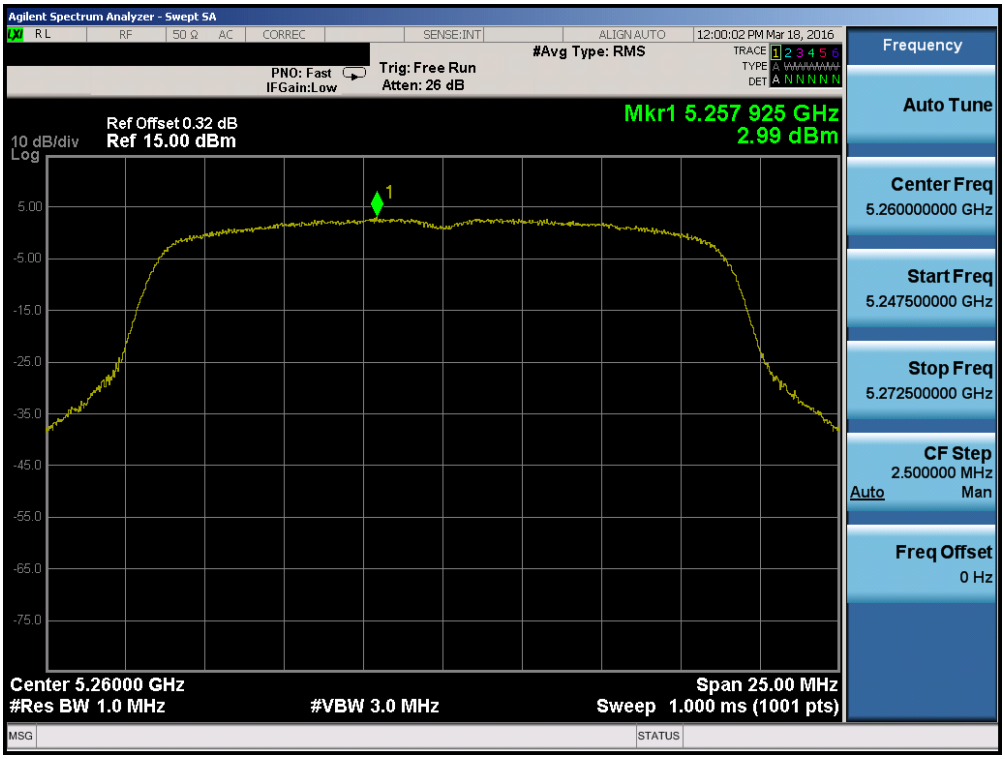

Plot 7-91. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

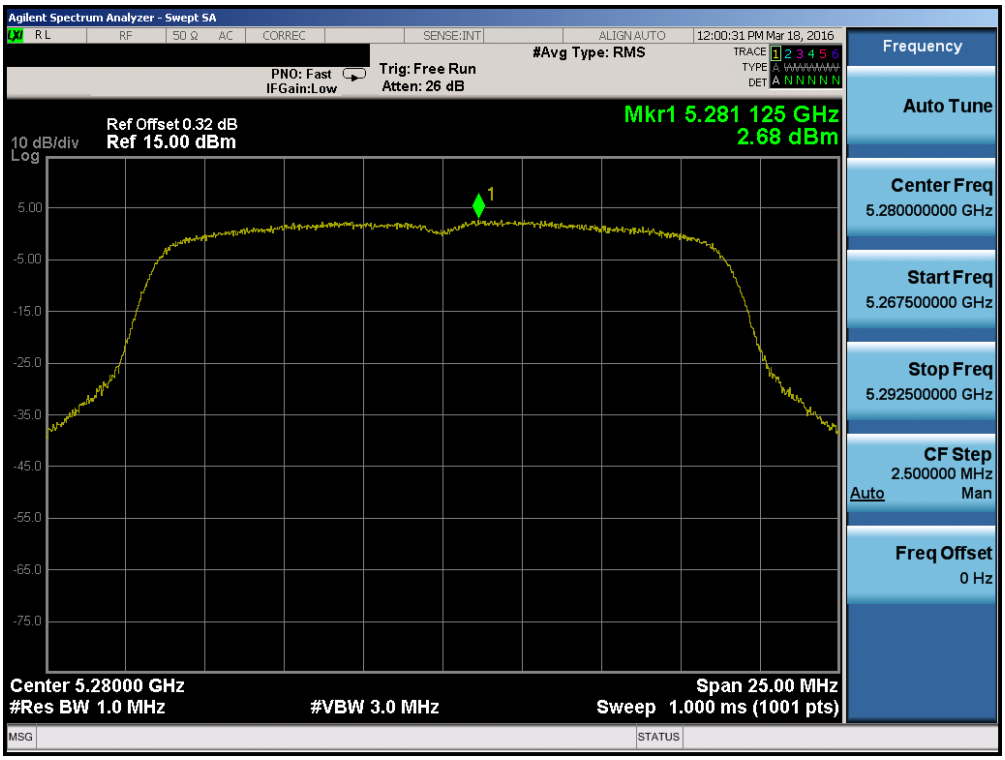

Plot 7-92. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

© 2016 PCTEST Engineering Laboratory, Inc.

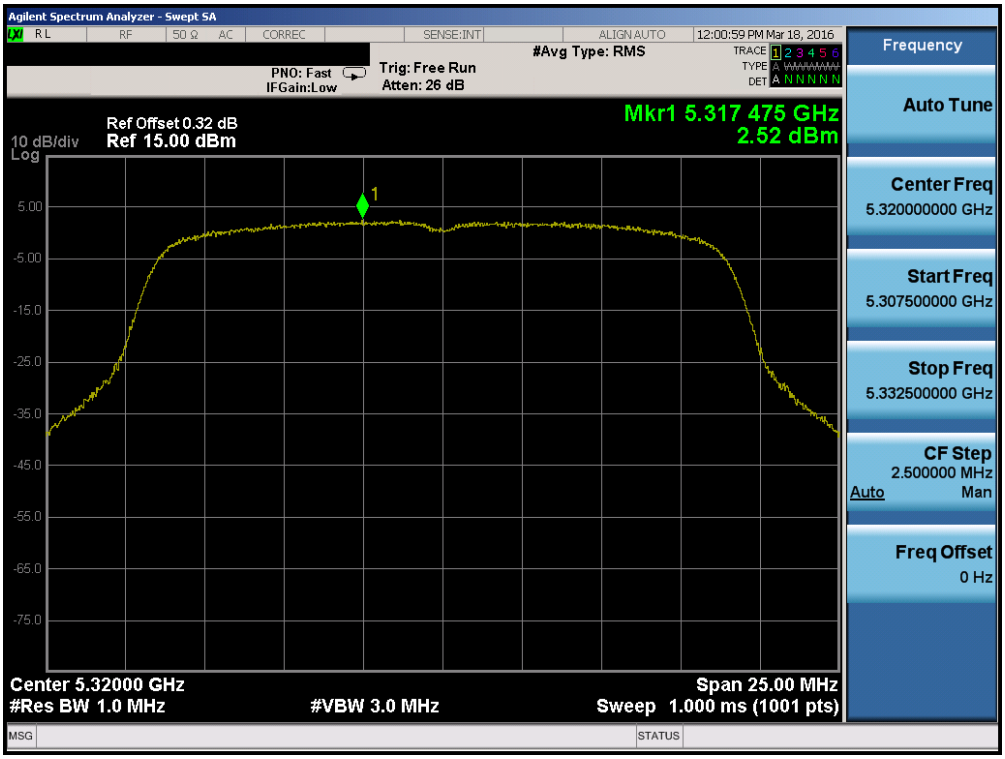

Plot 7-93. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

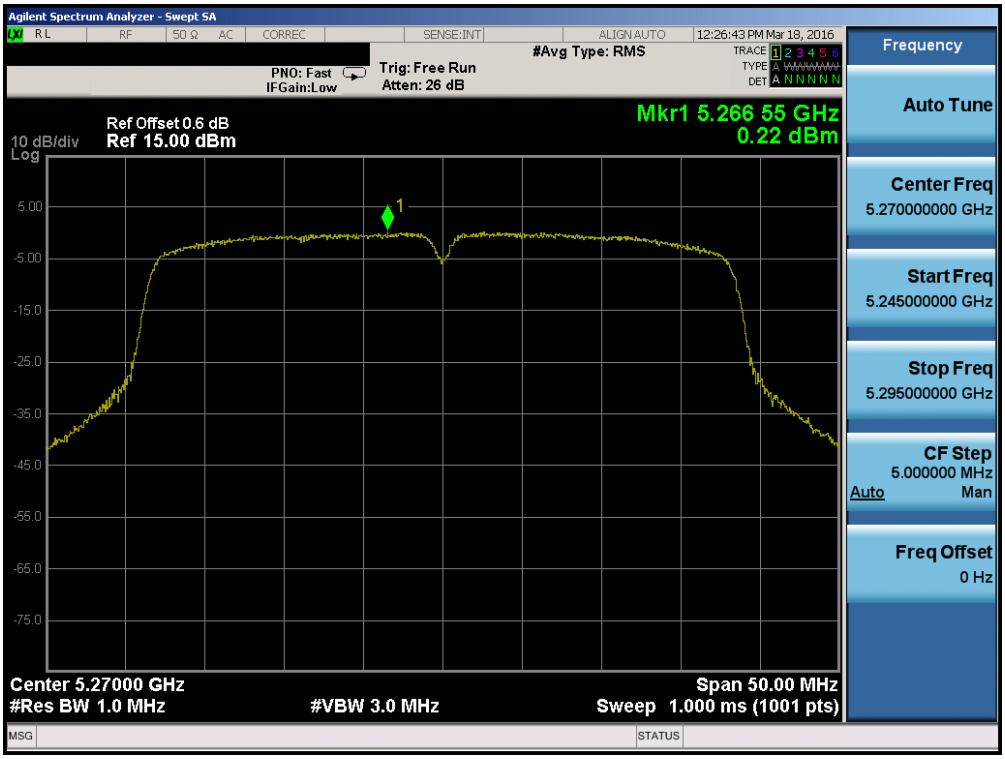

Plot 7-94. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

© 2016 PCTEST Engineering Laboratory, Inc.

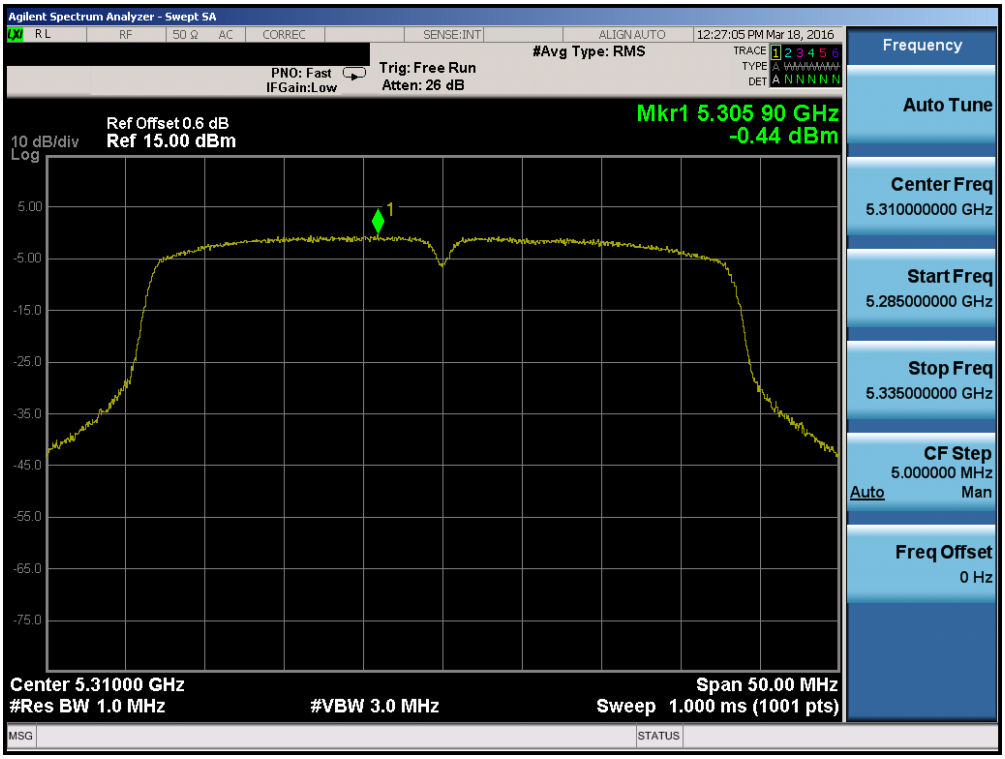

Plot 7-95. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

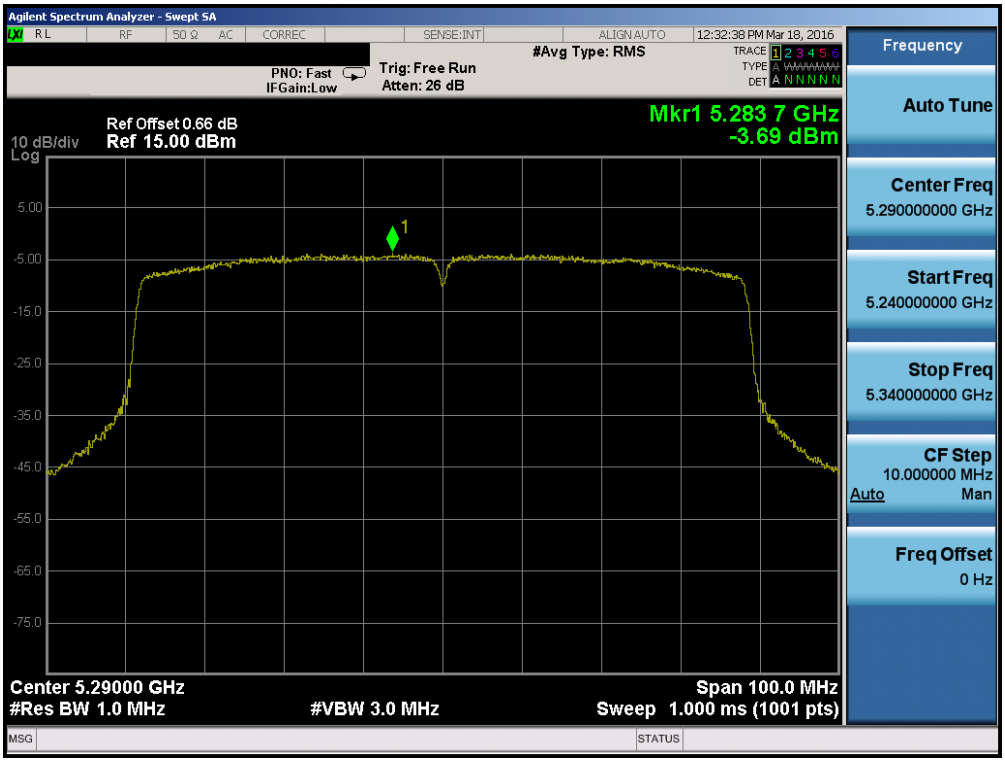

Plot 7-96. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

© 2016 PCTEST Engineering Laboratory, Inc.

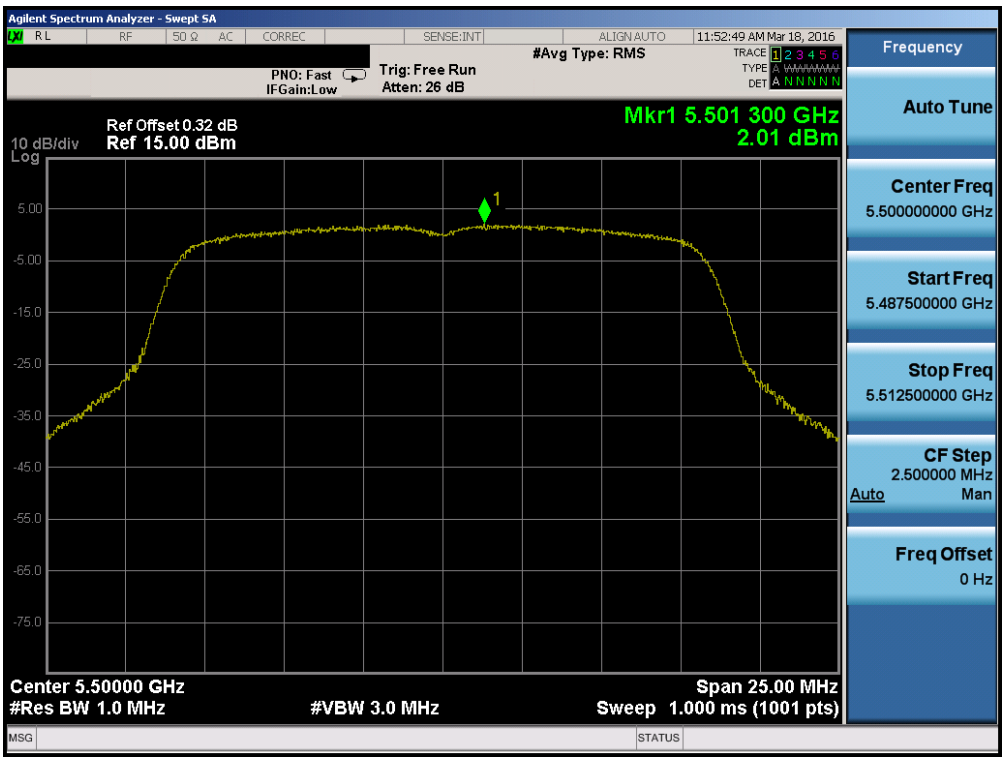

Plot 7-97. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 100)

Plot 7-98. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 120)

© 2016 PCTEST Engineering Laboratory, Inc.

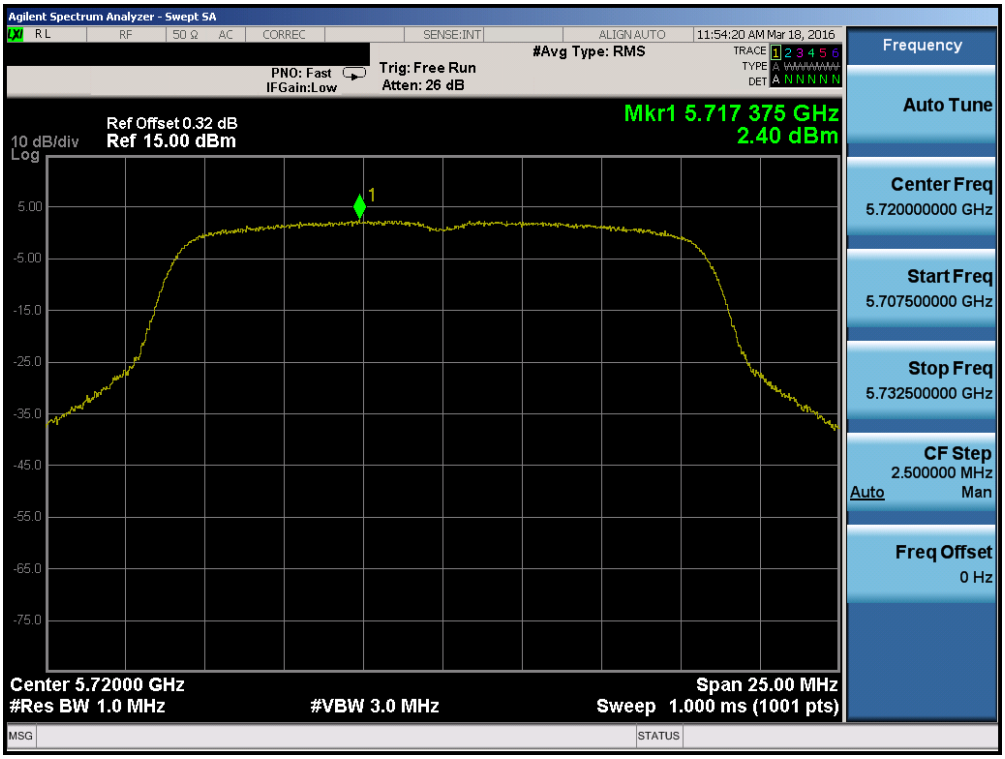

Plot 7-99. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 144)

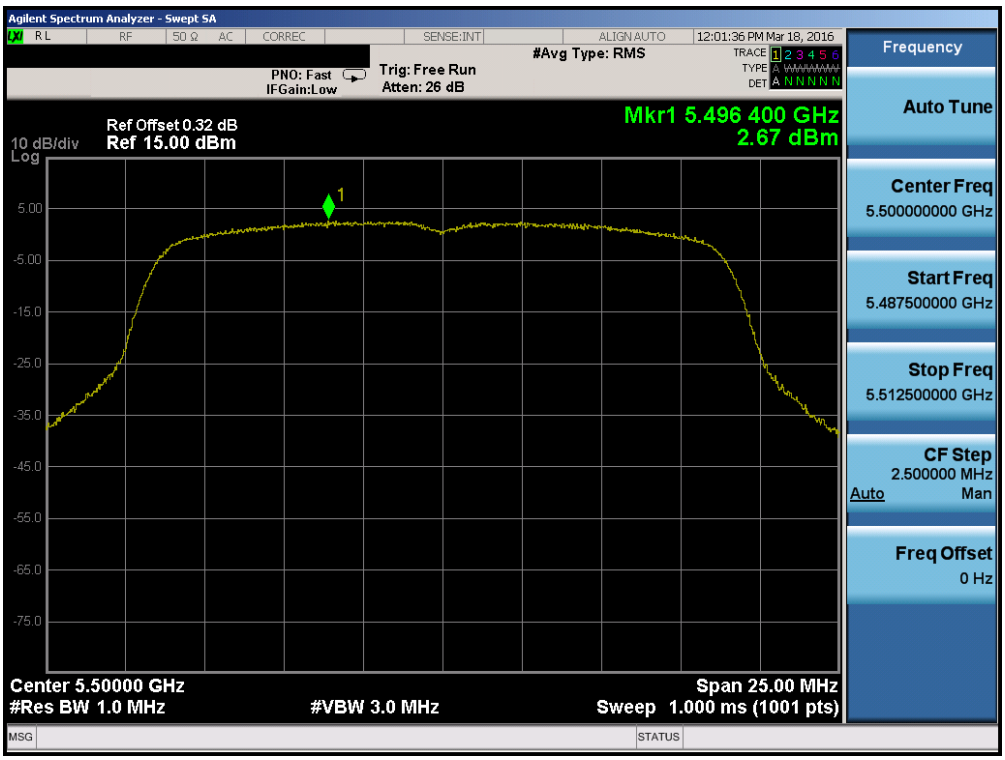

Plot 7-100. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

© 2016 PCTEST Engineering Laboratory, Inc.

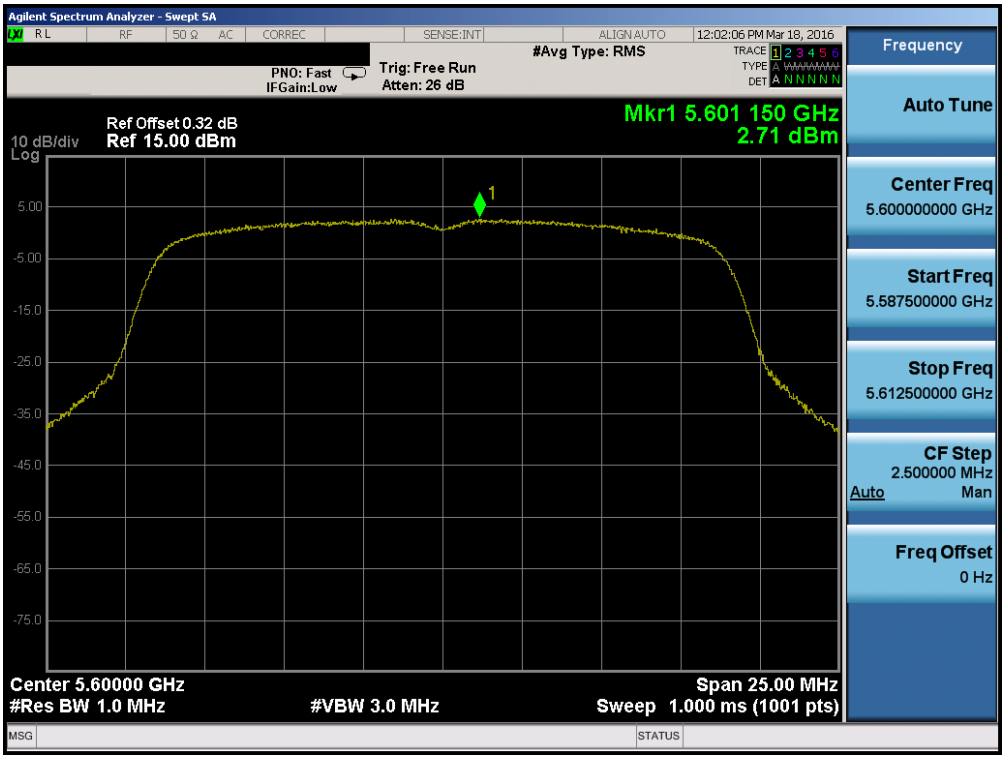

Plot 7-101. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 120)

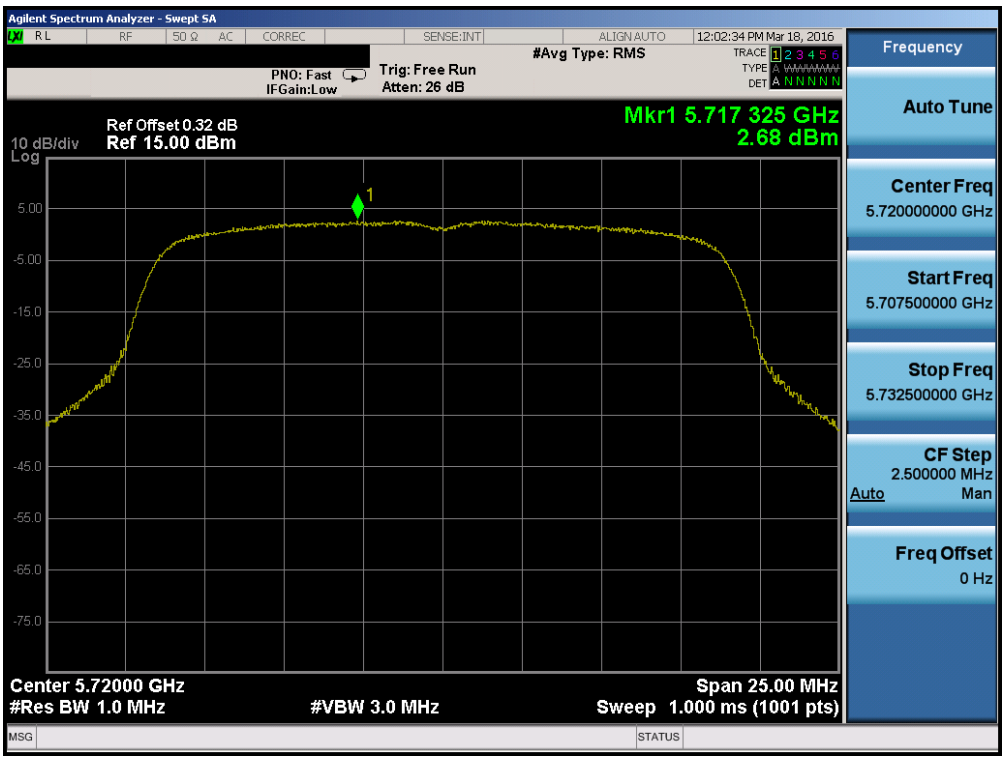

Plot 7-102. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

© 2016 PCTEST Engineering Laboratory, Inc.

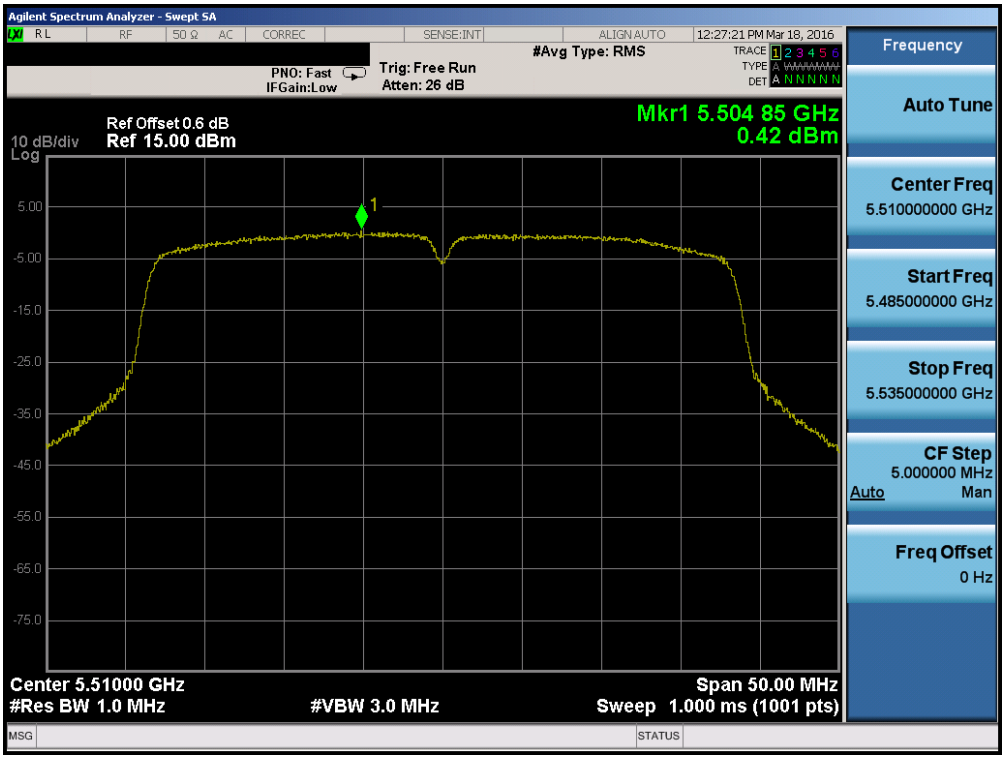

Plot 7-103. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

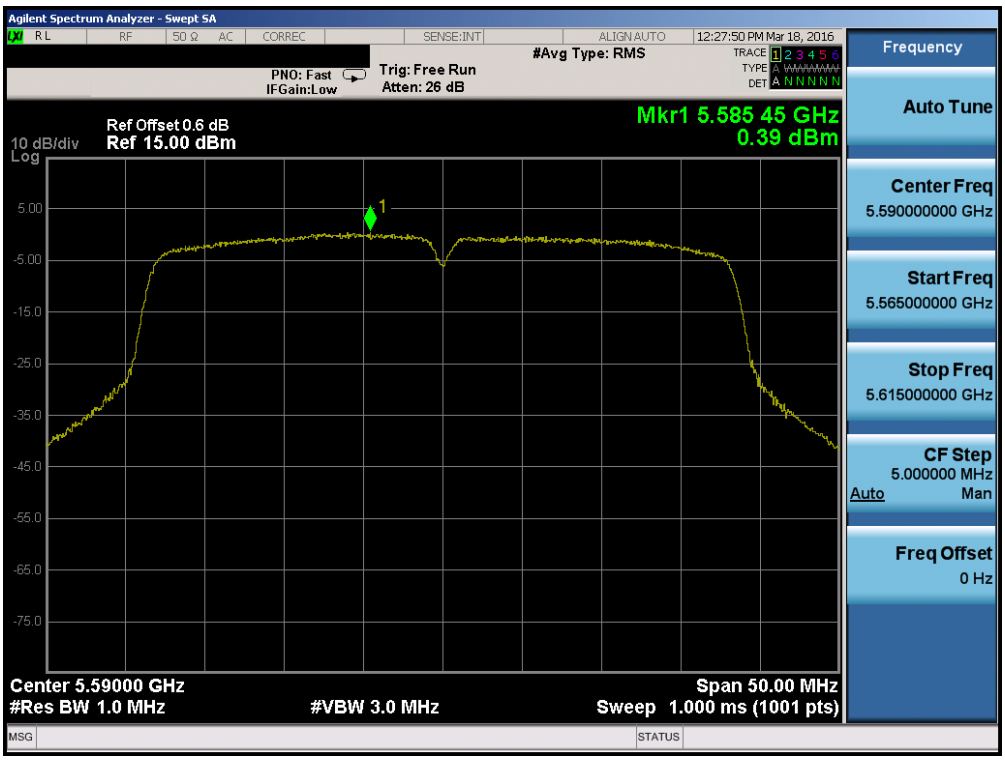

Plot 7-104. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 118)

© 2016 PCTEST Engineering Laboratory, Inc.

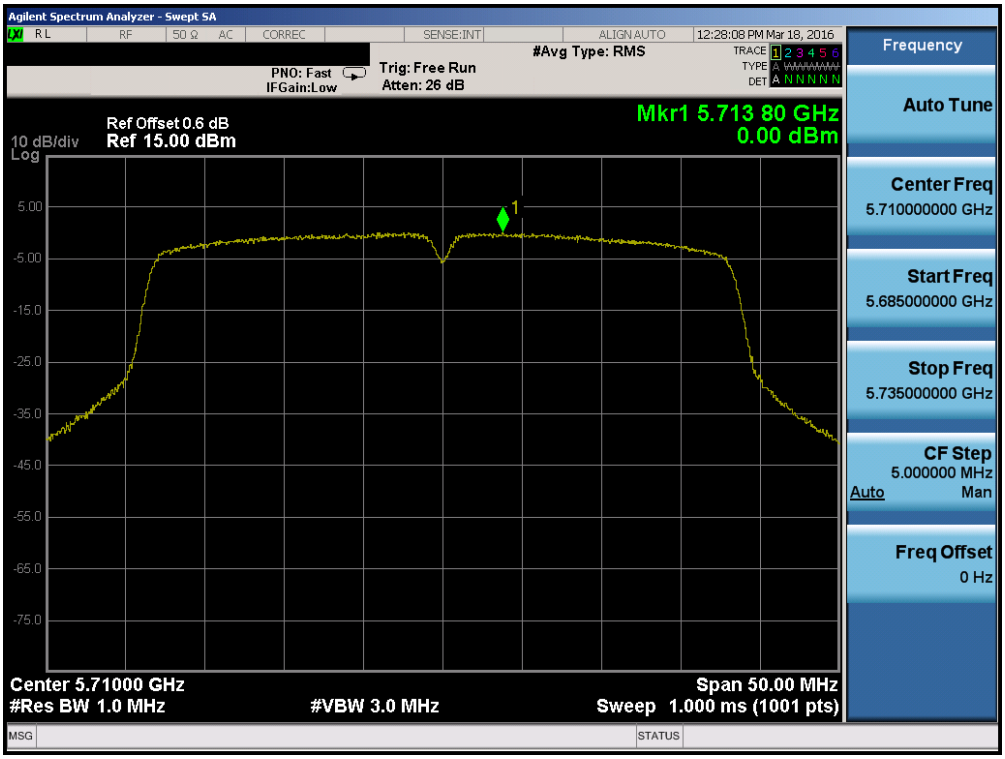

Plot 7-105. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

Plot 7-106. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

© 2016 PCTEST Engineering Laboratory, Inc.

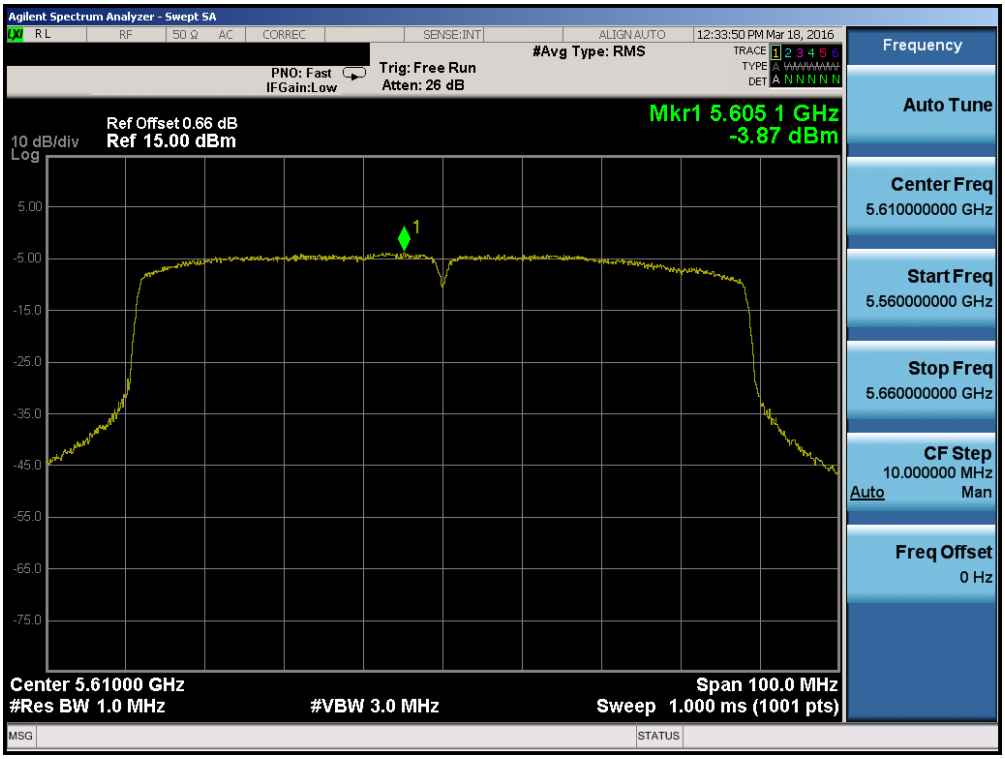

Plot 7-107. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 122)

Plot 7-108. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)

© 2016 PCTEST Engineering Laboratory, Inc.

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]	Pass / Fail
Band 3	5745	149	a	6	-1.24	30.0	-31.24	Pass
	5785	157	a	6	-0.57	30.0	-30.57	Pass
	5825	165	a	6	0.01	30.0	-29.99	Pass
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	0.03	30.0	-29.97	Pass
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	-0.12	30.0	-30.12	Pass
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	0.14	30.0	-29.86	Pass
	5755	151	n (40MHz)	13.5/15 (MCS0)	-2.66	30.0	-32.66	Pass
	5795	159	n (40MHz)	13.5/15 (MCS0)	-2.61	30.0	-32.61	Pass
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	-3.47	30.0	-33.47	Pass

Table 7-18. Band 3 Conducted Power Spectral Density Measurements

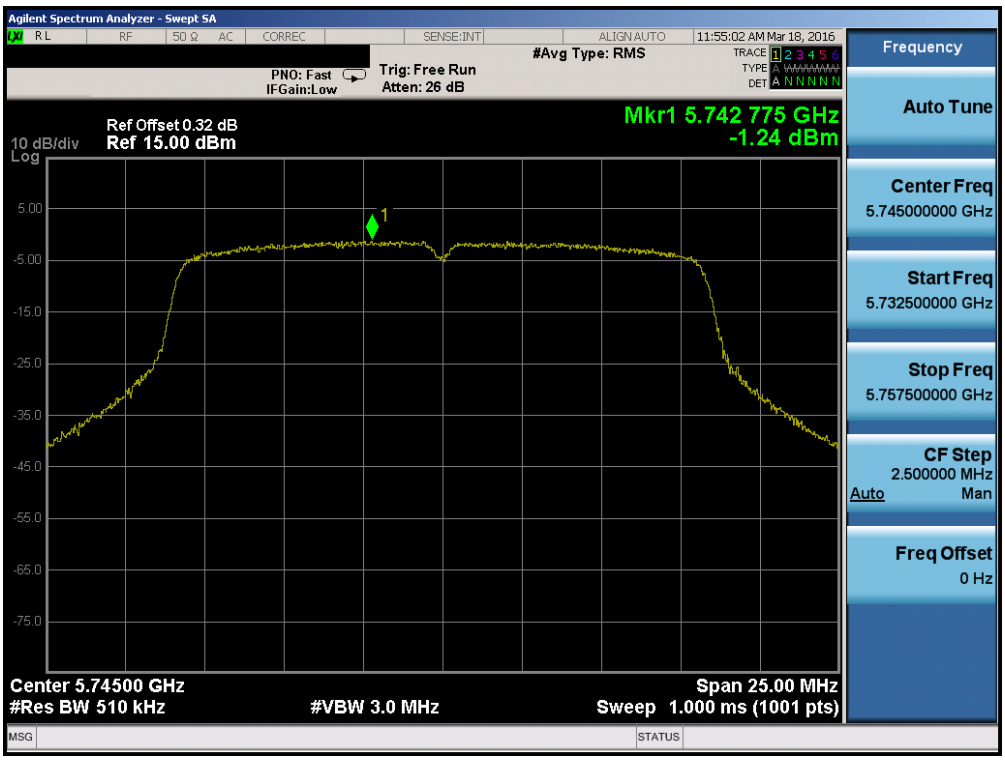

Plot 7-109. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 149)

© 2016 PCTEST Engineering Laboratory, Inc.

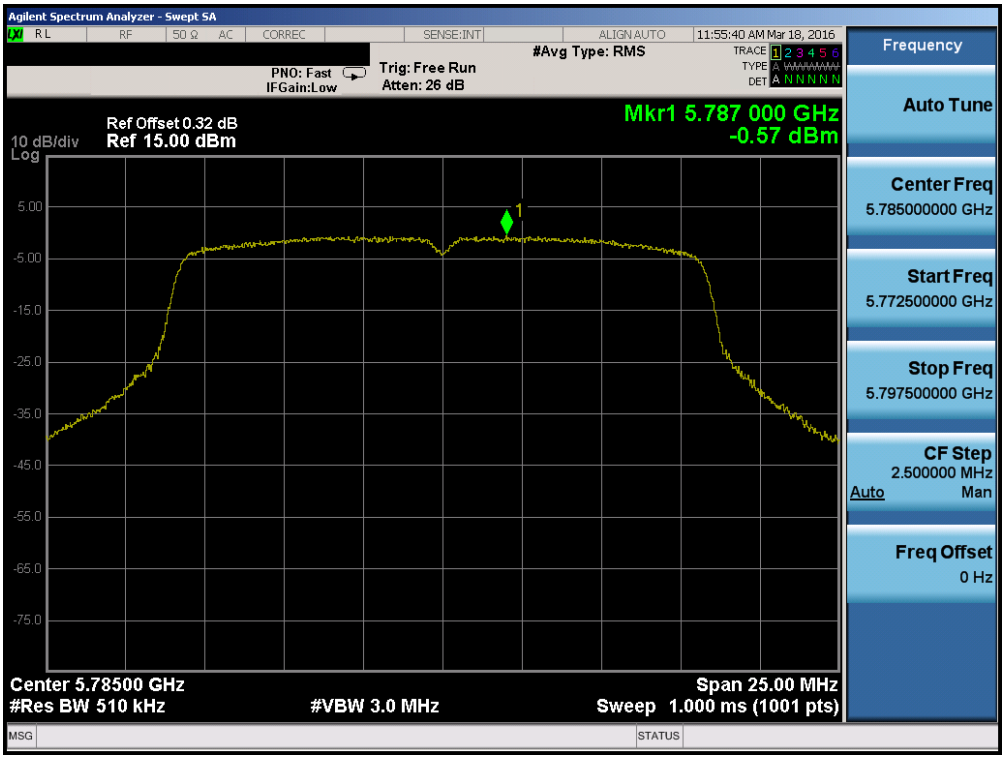

Plot 7-110. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 157)

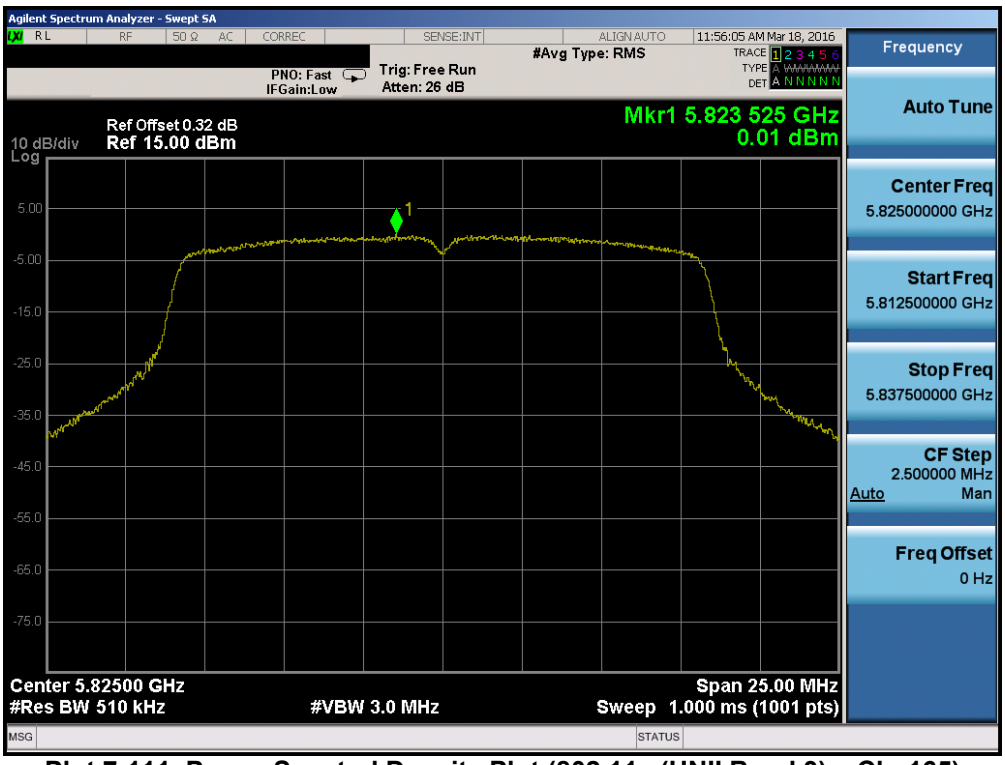

Plot 7-111. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 165)

© 2016 PCTEST Engineering Laboratory, Inc.

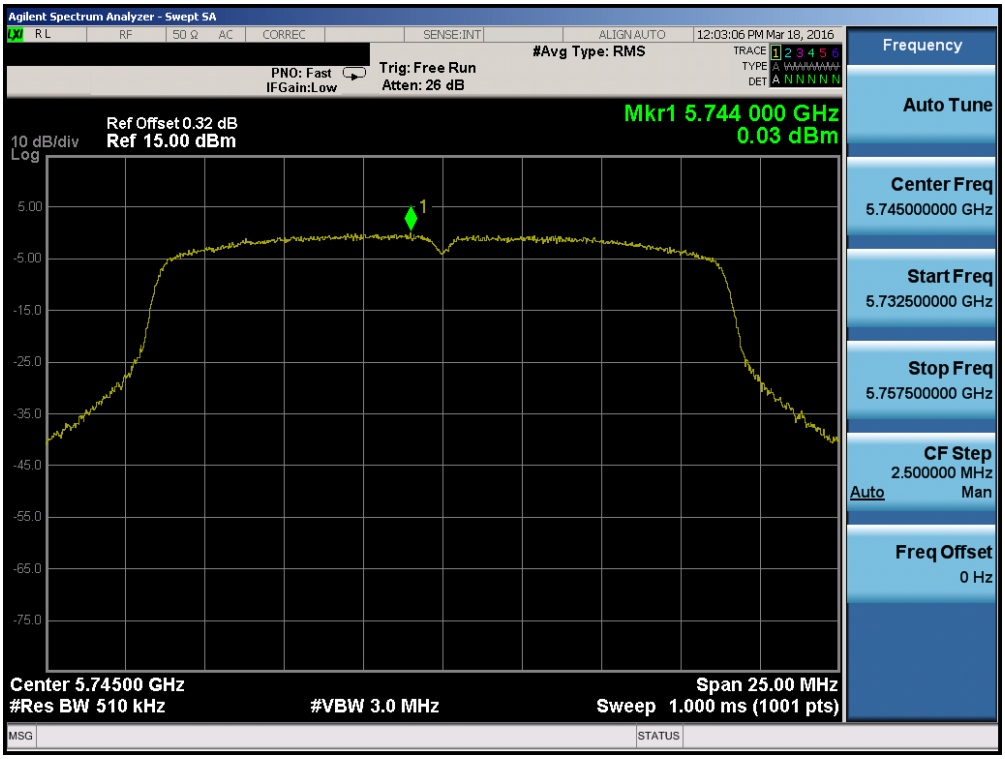

Plot 7-112. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

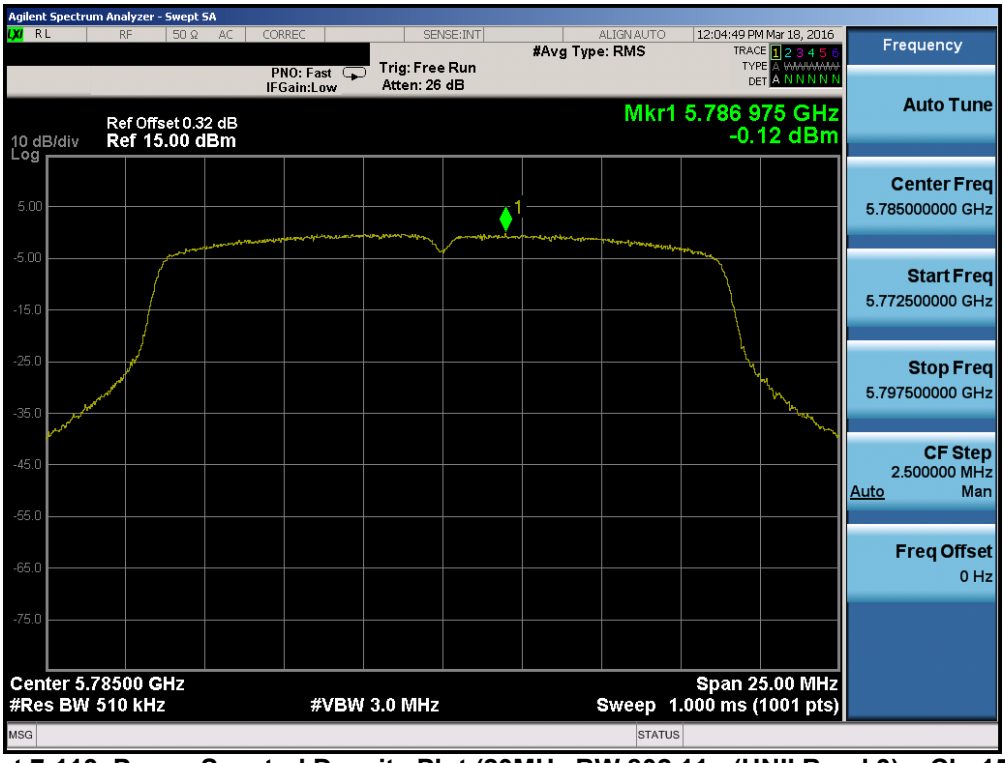

Plot 7-113. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

© 2016 PCTEST Engineering Laboratory, Inc.

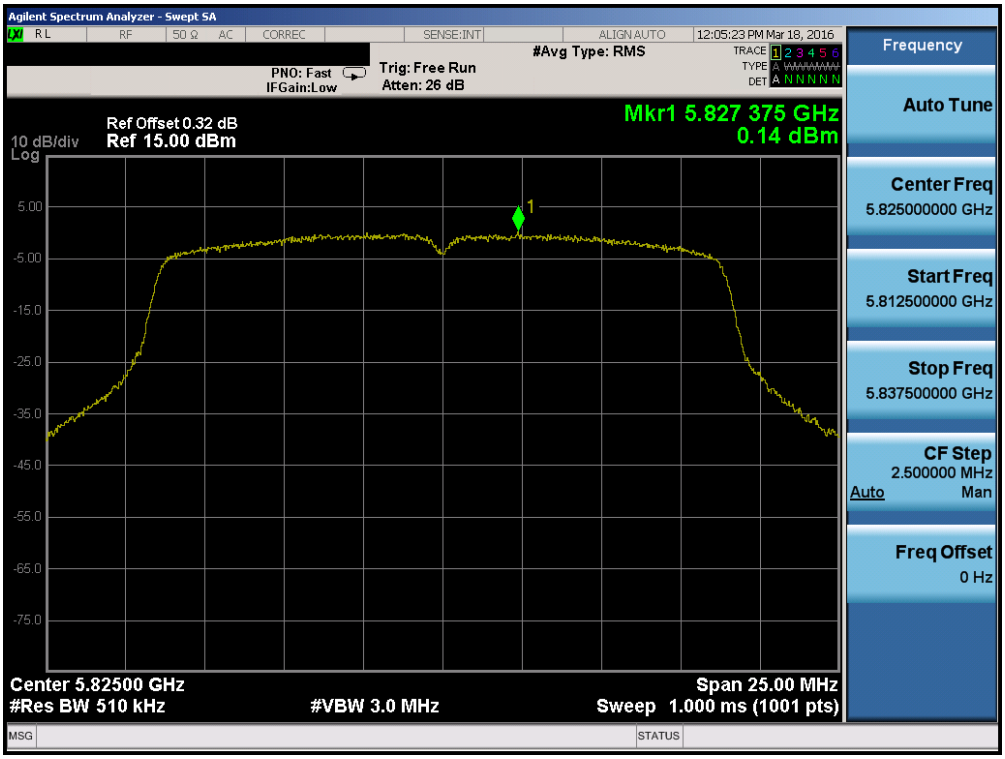

Plot 7-114. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

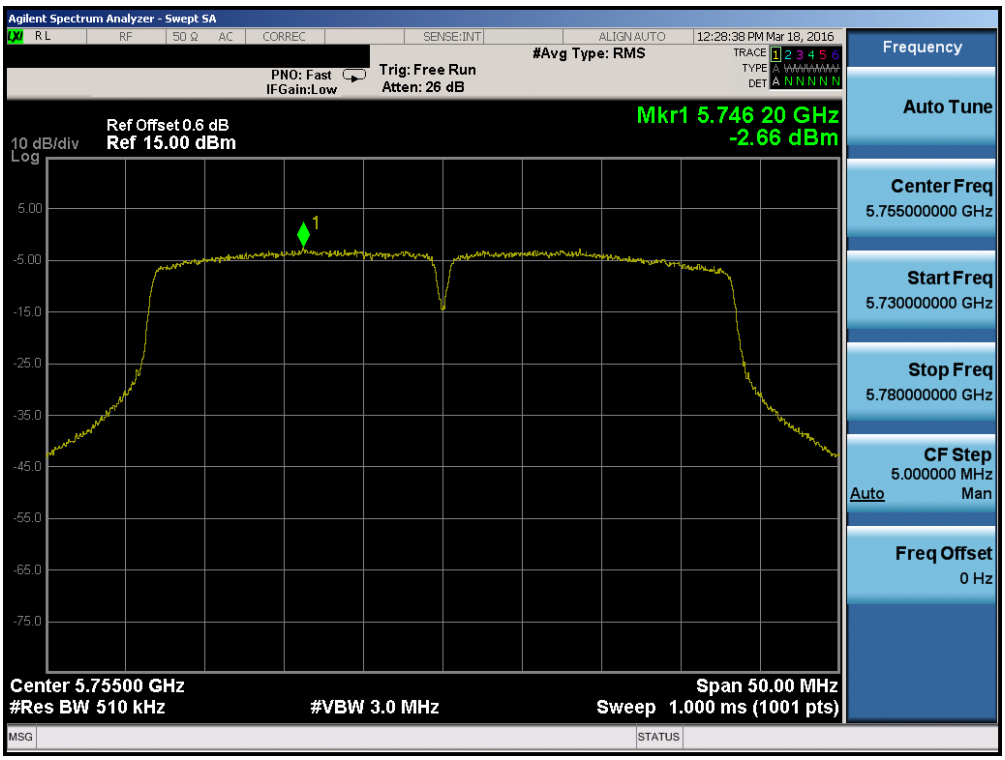

Plot 7-115. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

© 2016 PCTEST Engineering Laboratory, Inc.

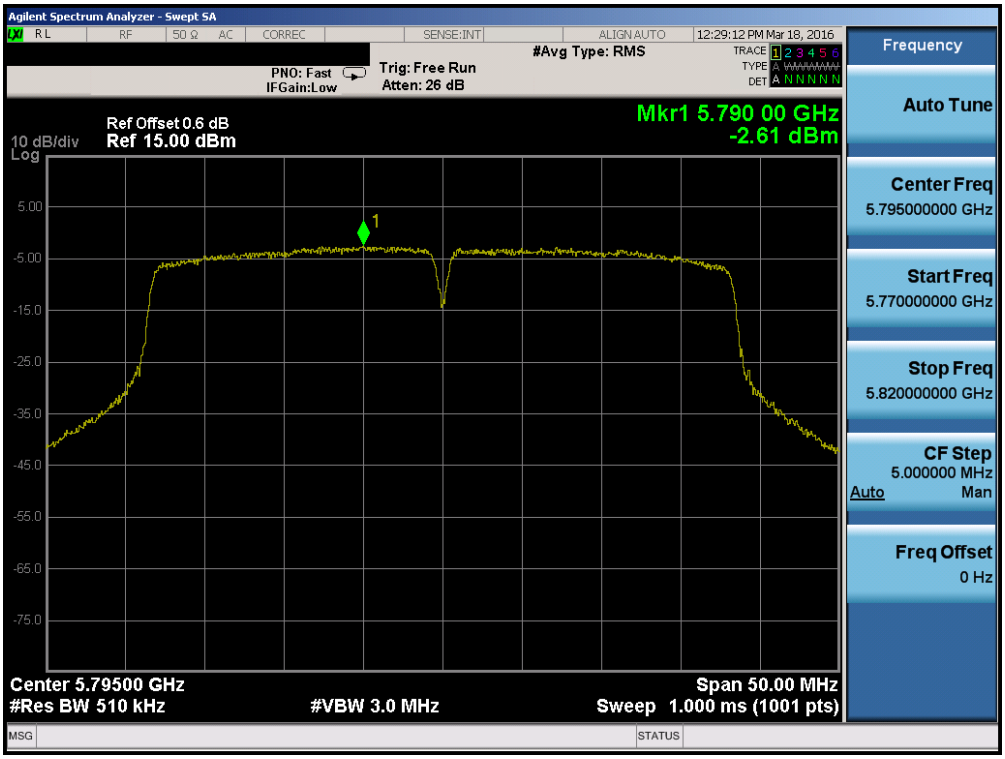

Plot 7-116. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

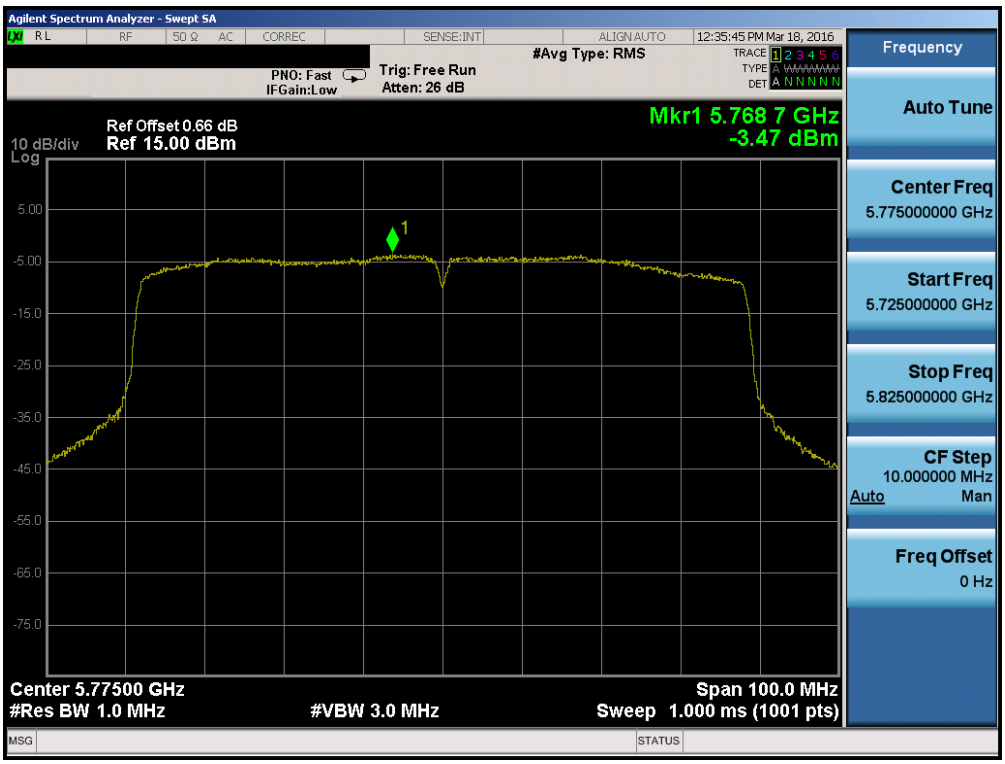

Plot 7-117. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

© 2016 PCTEST Engineering Laboratory, Inc.

Antenna-2 Power Spectral Density Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/MHz]	Margin [dB]	Pass / Fail
Band 1	5180	36	a	6	2.46	11.0	-8.54	Pass
	5200	40	a	6	2.72	11.0	-8.28	Pass
	5240	48	a	6	2.44	11.0	-8.57	Pass
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	2.22	11.0	-8.78	Pass
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	2.35	11.0	-8.65	Pass
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	2.04	11.0	-8.96	Pass
	5190	38	n (40MHz)	13.5/15 (MCS0)	-0.46	11.0	-11.46	Pass
	5230	46	n (40MHz)	13.5/15 (MCS0)	-0.45	11.0	-11.45	Pass
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	-3.67	11.0	-14.67	Pass
Band 2A	5260	52	a	6	2.65	11.0	-8.35	Pass
	5280	56	a	6	2.50	11.0	-8.50	Pass
	5320	64	a	6	2.75	11.0	-8.25	Pass
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	2.10	11.0	-8.90	Pass
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	2.18	11.0	-8.82	Pass
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	2.40	11.0	-8.61	Pass
	5270	54	n (40MHz)	13.5/15 (MCS0)	-0.66	11.0	-11.66	Pass
	5310	62	n (40MHz)	13.5/15 (MCS0)	-0.61	11.0	-11.61	Pass
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	-4.07	11.0	-15.07	Pass
Band 2C	5500	100	a	6	2.43	11.0	-8.57	Pass
	5600	120	a	6	2.56	11.0	-8.44	Pass
	5720	144	a	6	2.42	11.0	-8.58	Pass
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	1.94	11.0	-9.06	Pass
	5600	120	n (20MHz)	6.5/7.2 (MCS0)	1.93	11.0	-9.07	Pass
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	2.07	11.0	-8.93	Pass
	5510	102	n (40MHz)	13.5/15 (MCS0)	-0.97	11.0	-11.97	Pass
	5590	118	n (40MHz)	13.5/15 (MCS0)	-0.82	11.0	-11.82	Pass
	5710	142	n (40MHz)	13.5/15 (MCS0)	-0.65	11.0	-11.65	Pass
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	-4.43	11.0	-15.43	Pass
	5610	122	ac (80MHz)	29.3/32.5 (MCS0)	-4.56	11.0	-15.56	Pass
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	-7.61	11.0	-18.61	Pass

Table 7-19. Conducted Power Spectral Density Measurements

© 2016 PCTEST Engineering Laboratory, Inc.

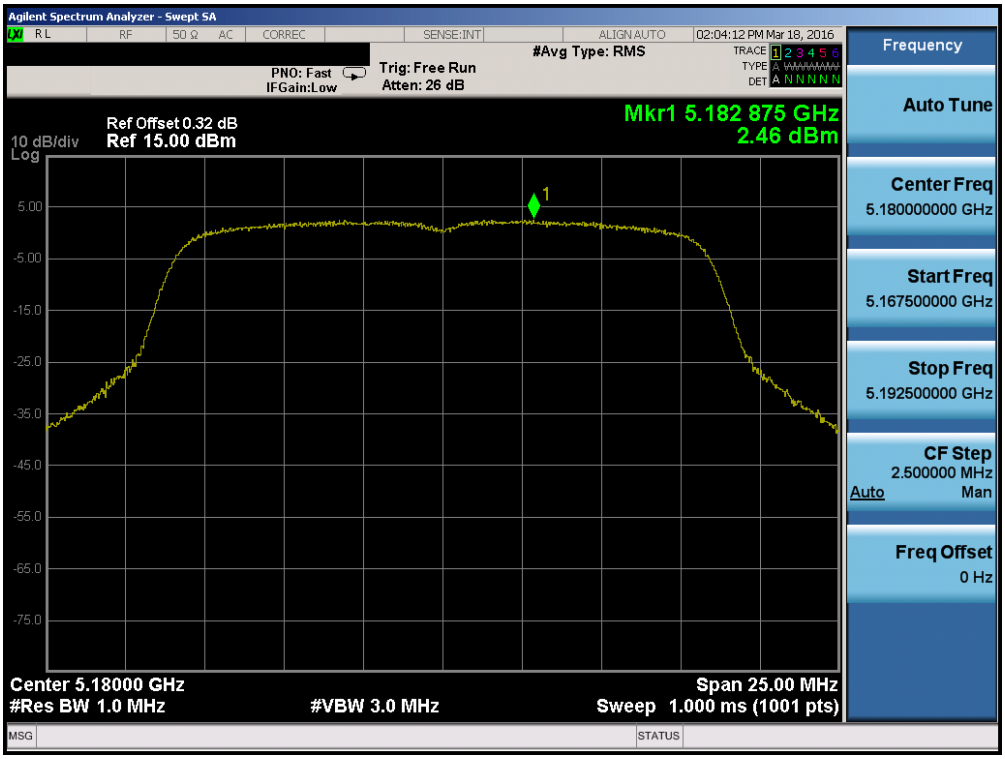

Plot 7-118. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 36)

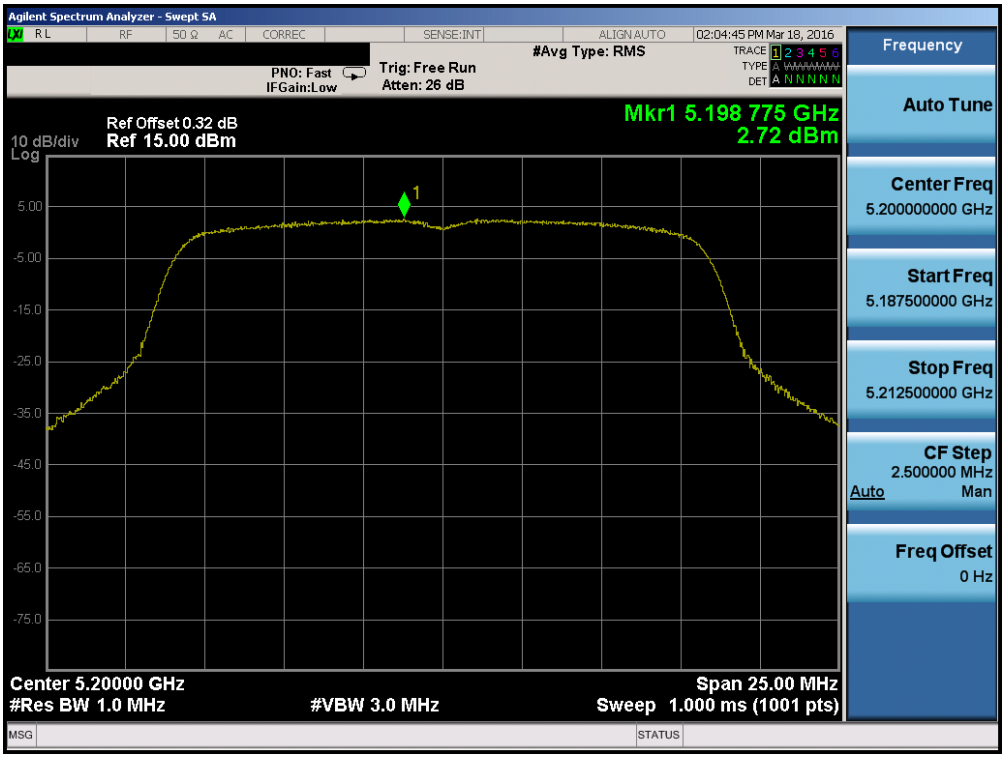

Plot 7-119. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 40)

© 2016 PCTEST Engineering Laboratory, Inc.

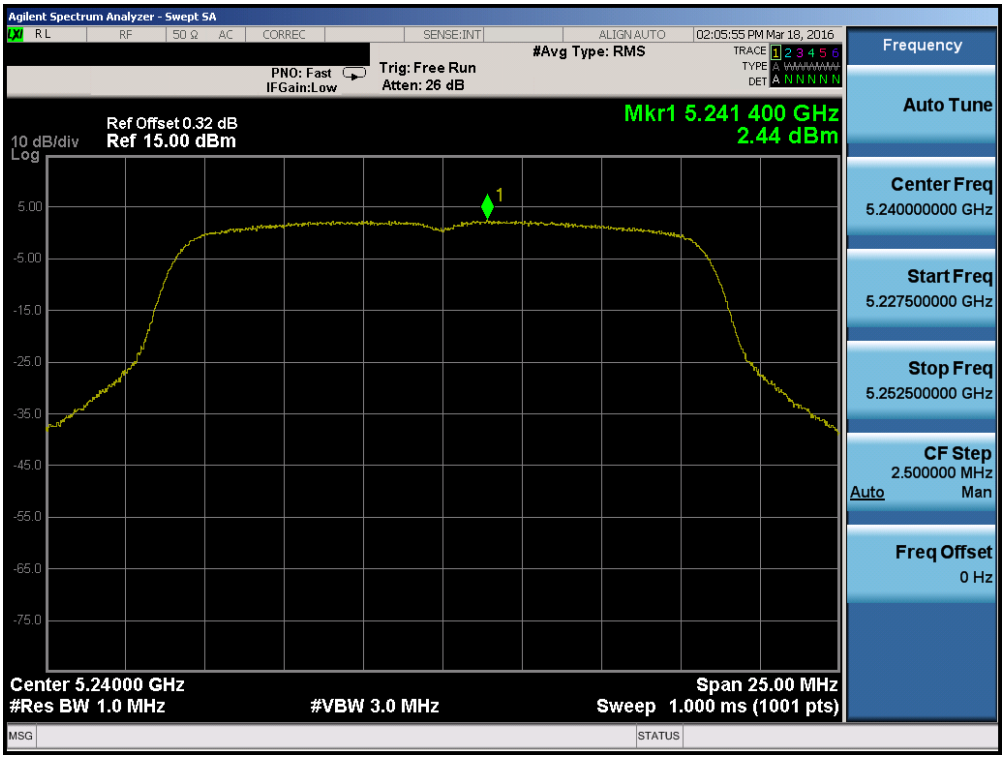

Plot 7-120. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 48)

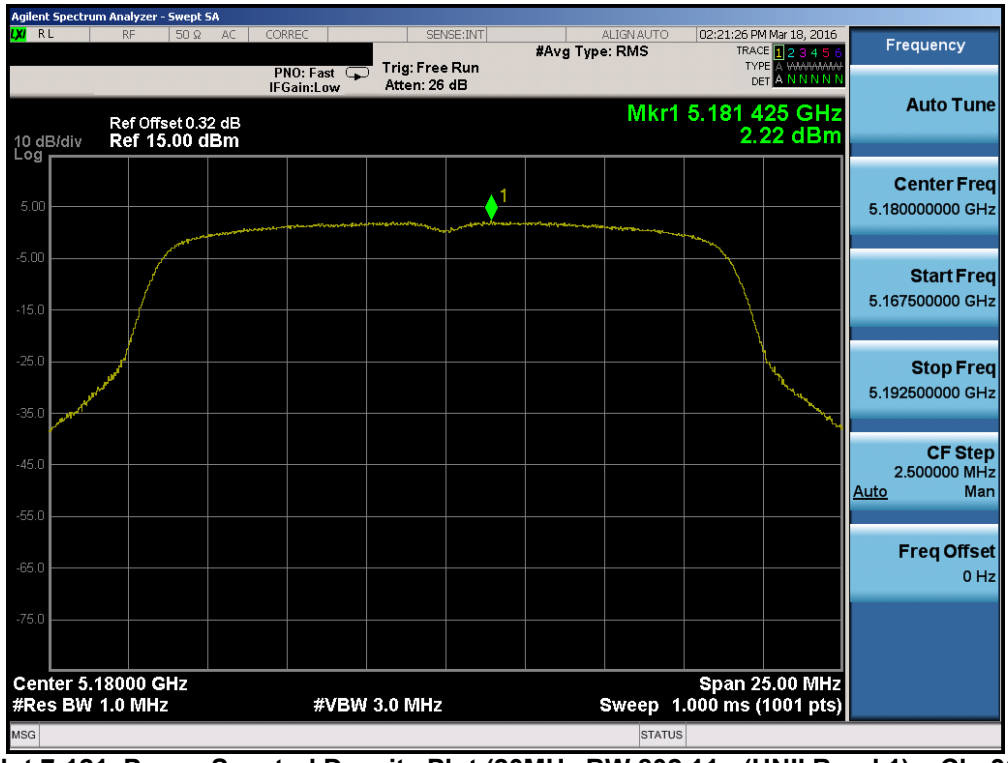

Plot 7-121. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

© 2016 PCTEST Engineering Laboratory, Inc.

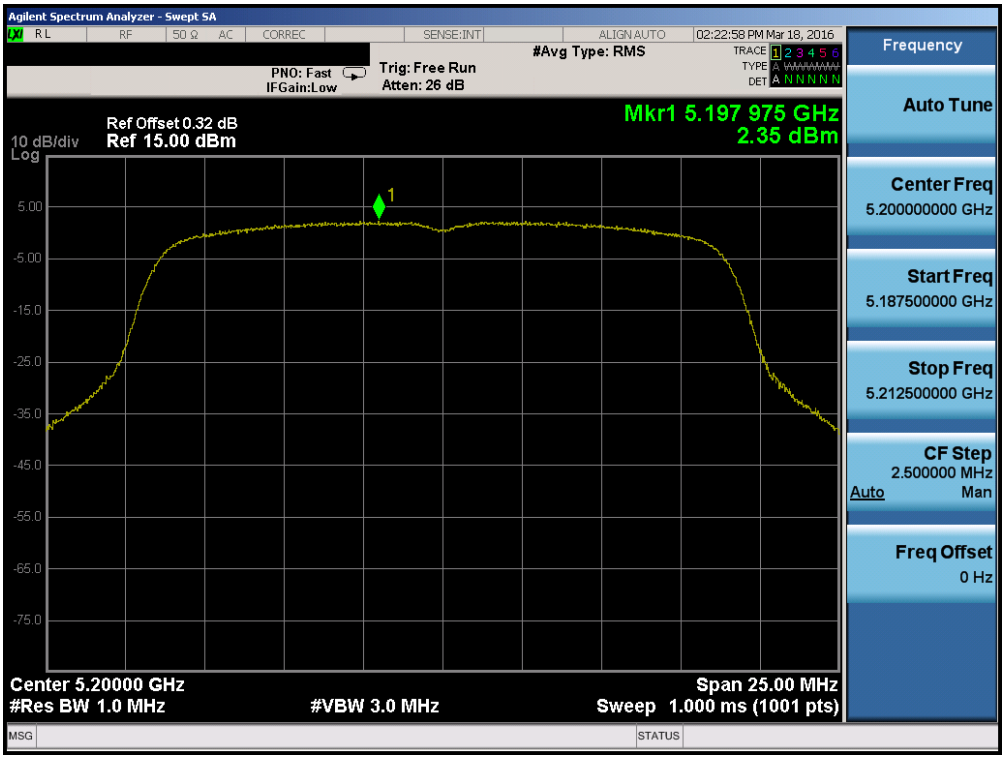

Plot 7-122. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

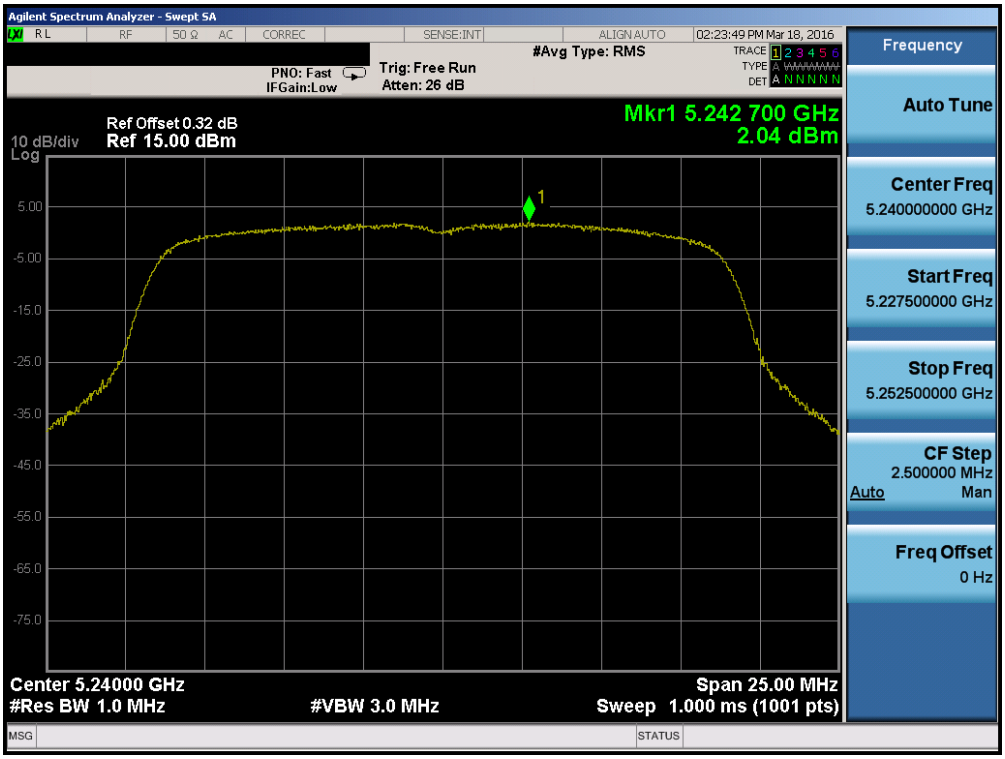

Plot 7-123. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

© 2016 PCTEST Engineering Laboratory, Inc.

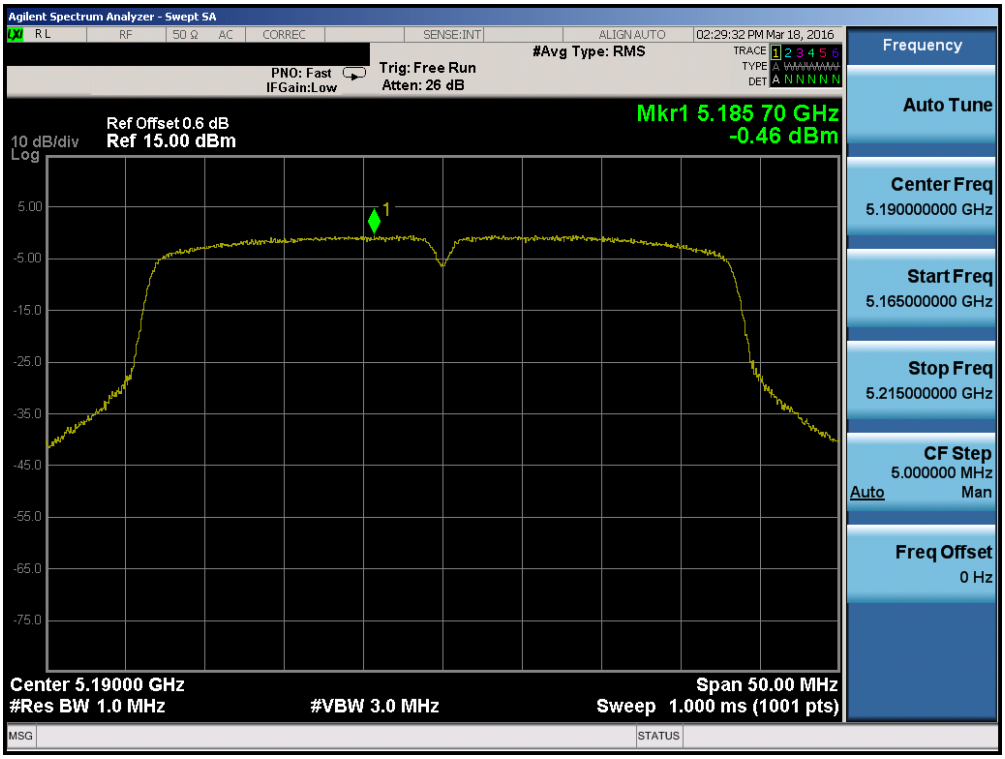

Plot 7-124. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

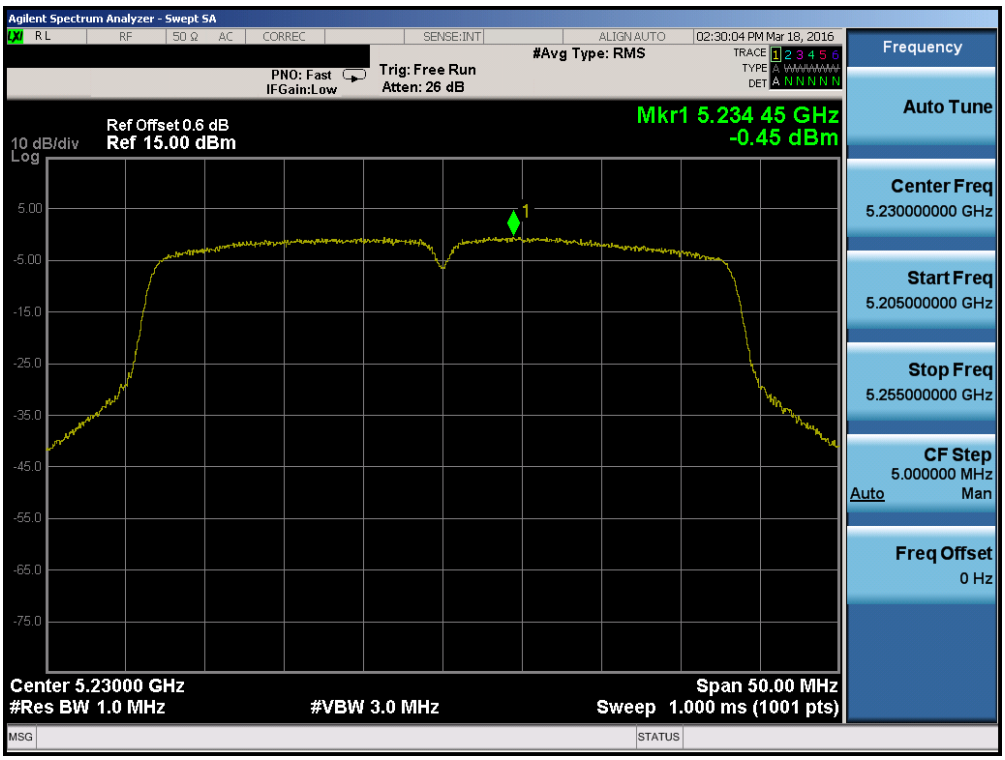

Plot 7-125. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

© 2016 PCTEST Engineering Laboratory, Inc.

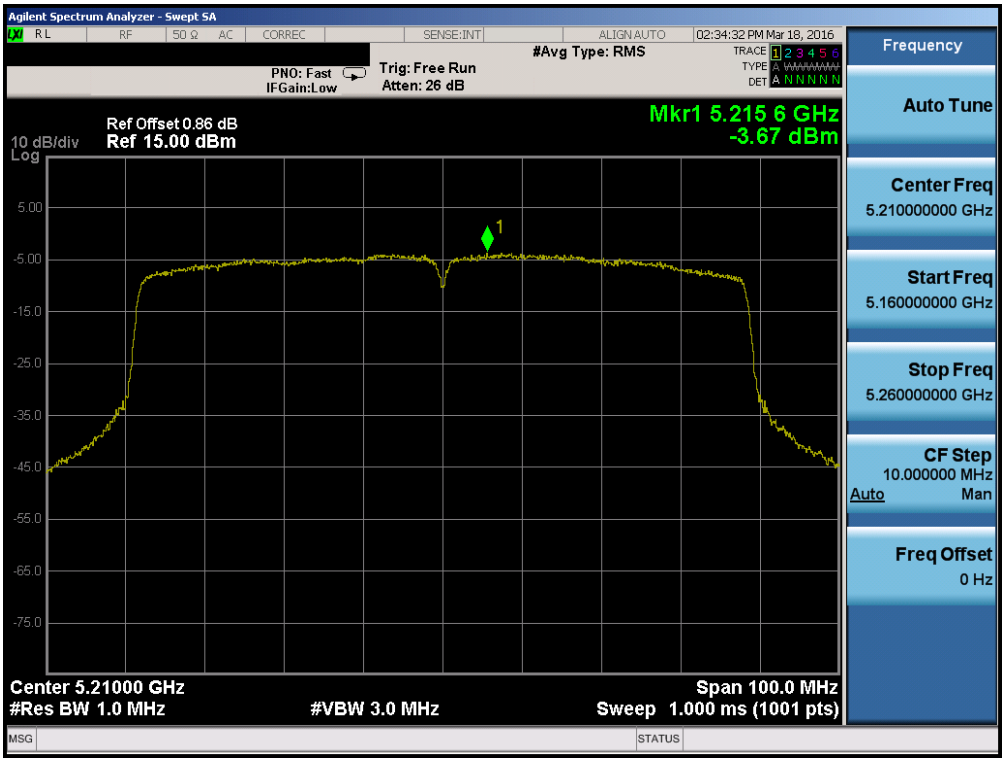

Plot 7-126. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

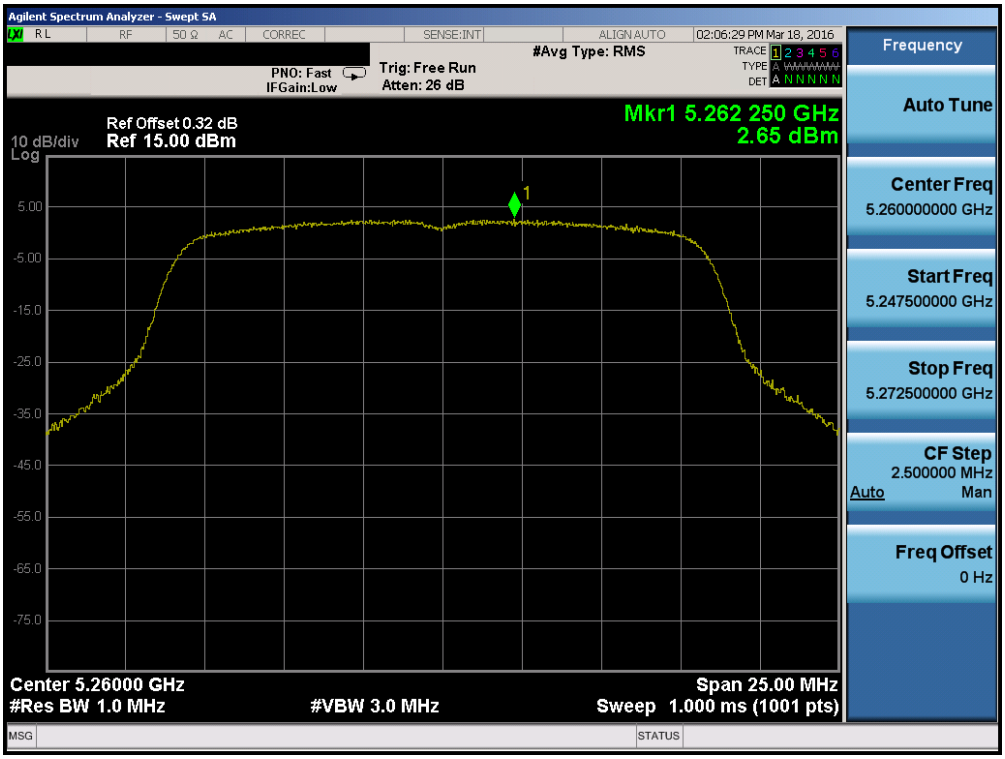

Plot 7-127. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 52)

© 2016 PCTEST Engineering Laboratory, Inc.

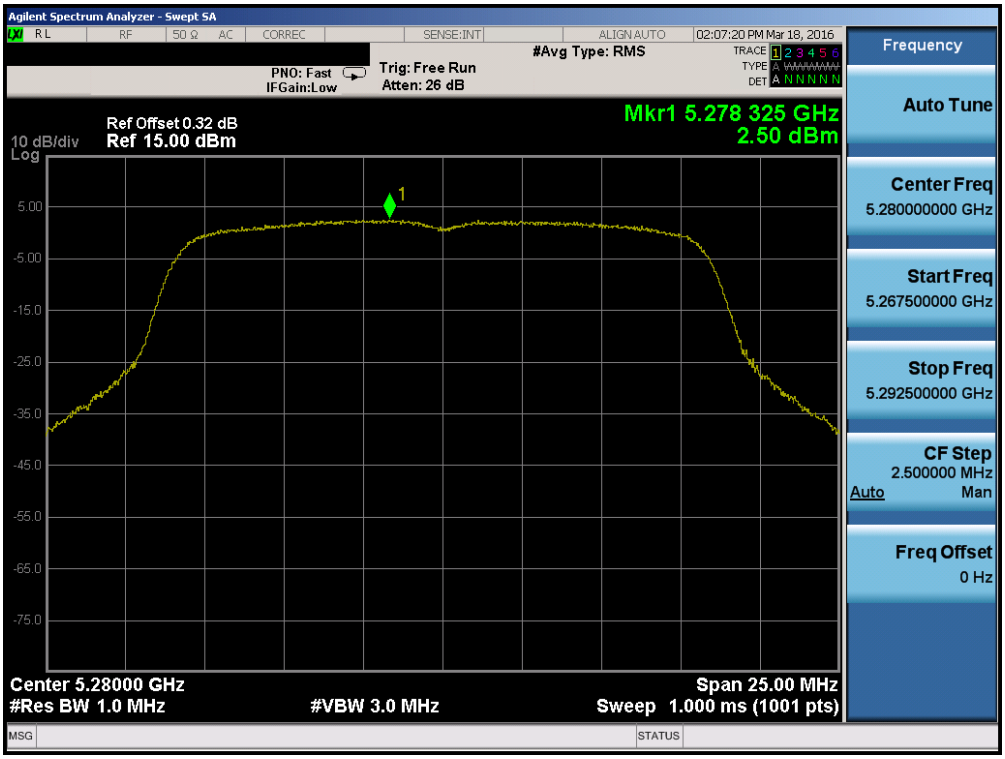

Plot 7-128. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 56)

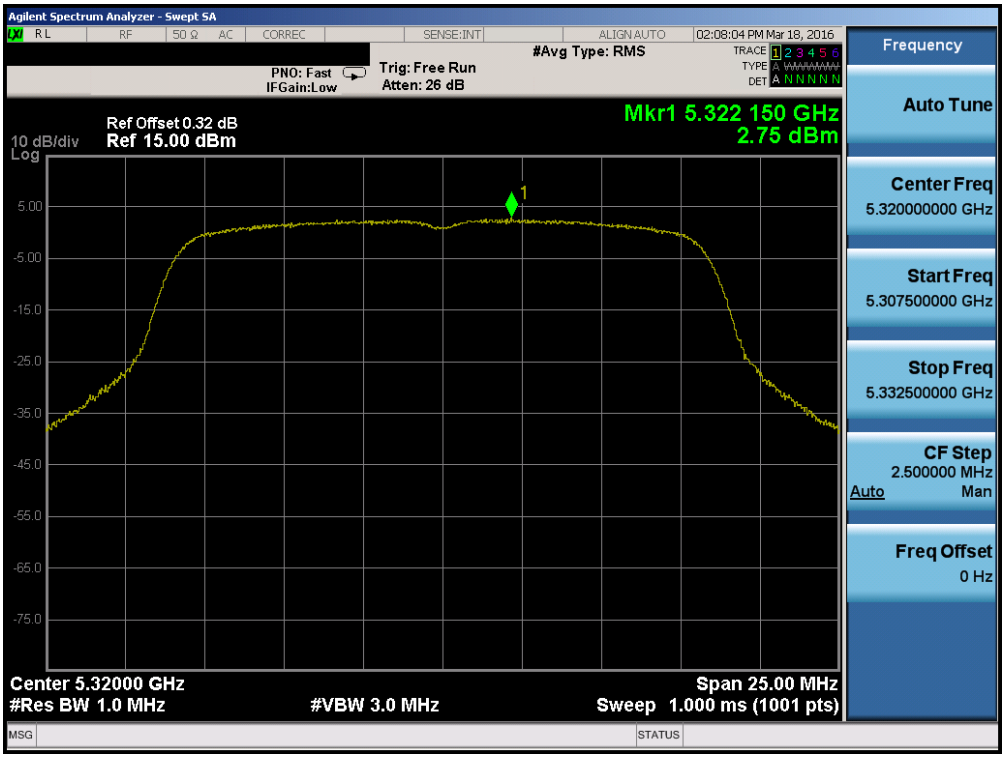

Plot 7-129. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 64)

© 2016 PCTEST Engineering Laboratory, Inc.

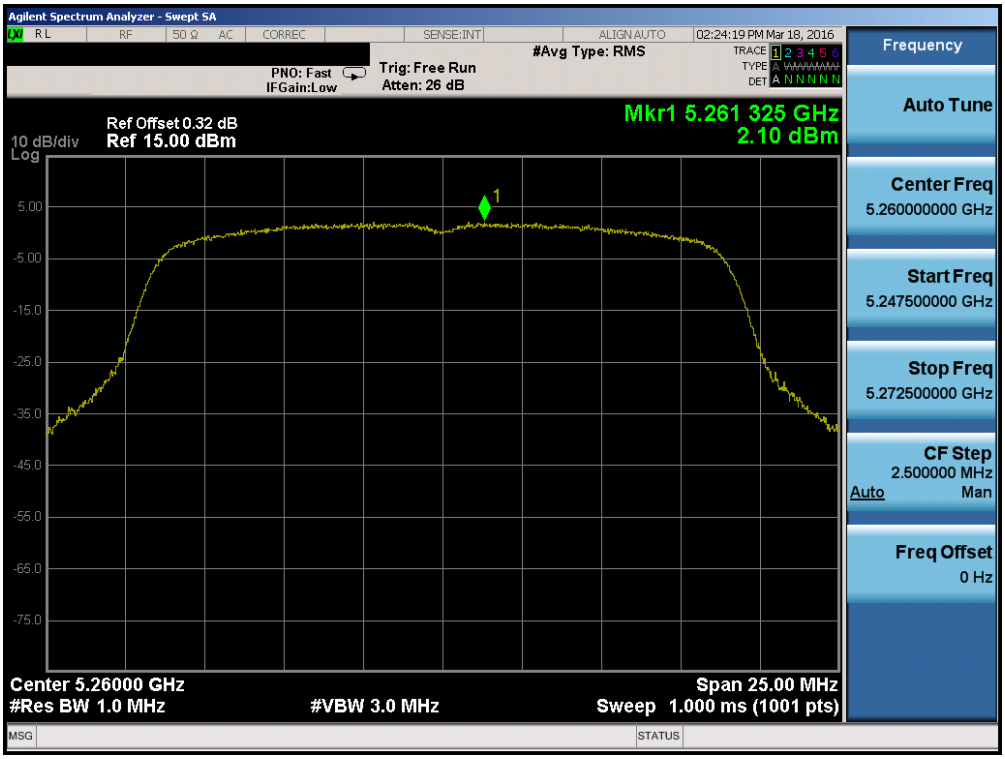

Plot 7-130. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

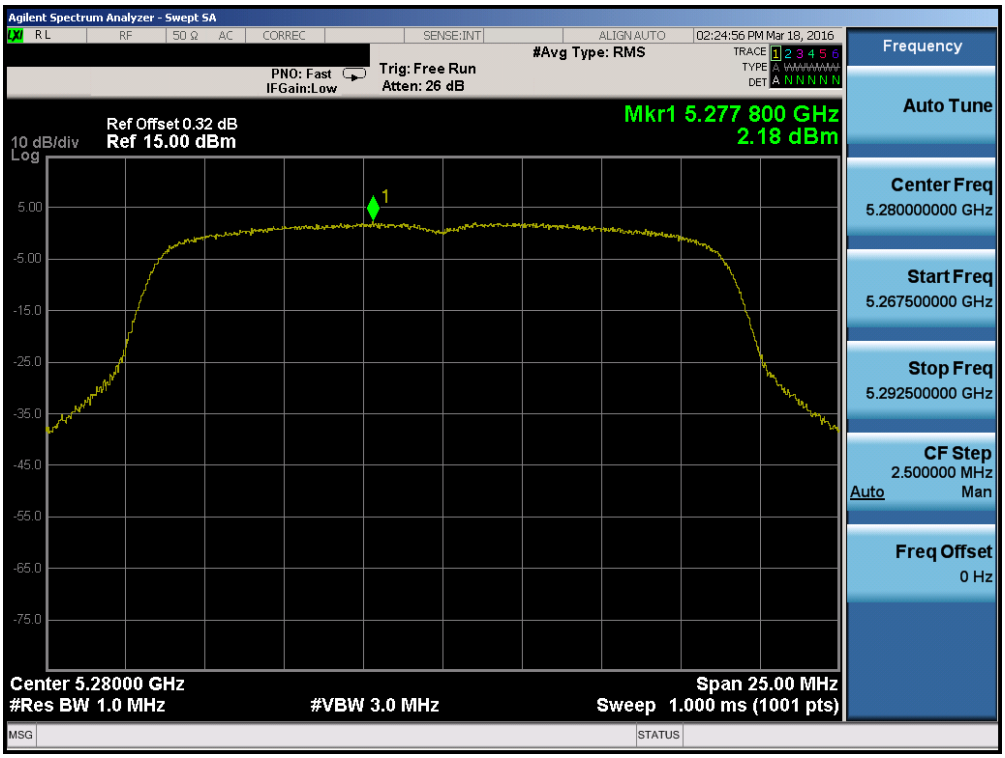

Plot 7-131. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

© 2016 PCTEST Engineering Laboratory, Inc.

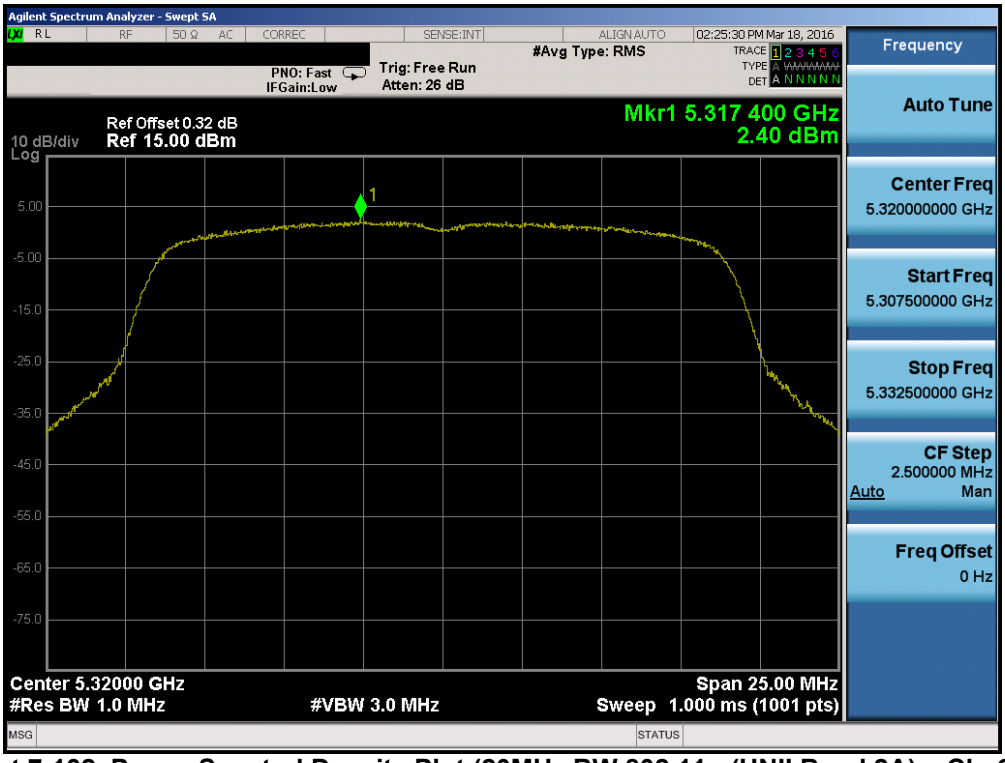

Plot 7-132. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

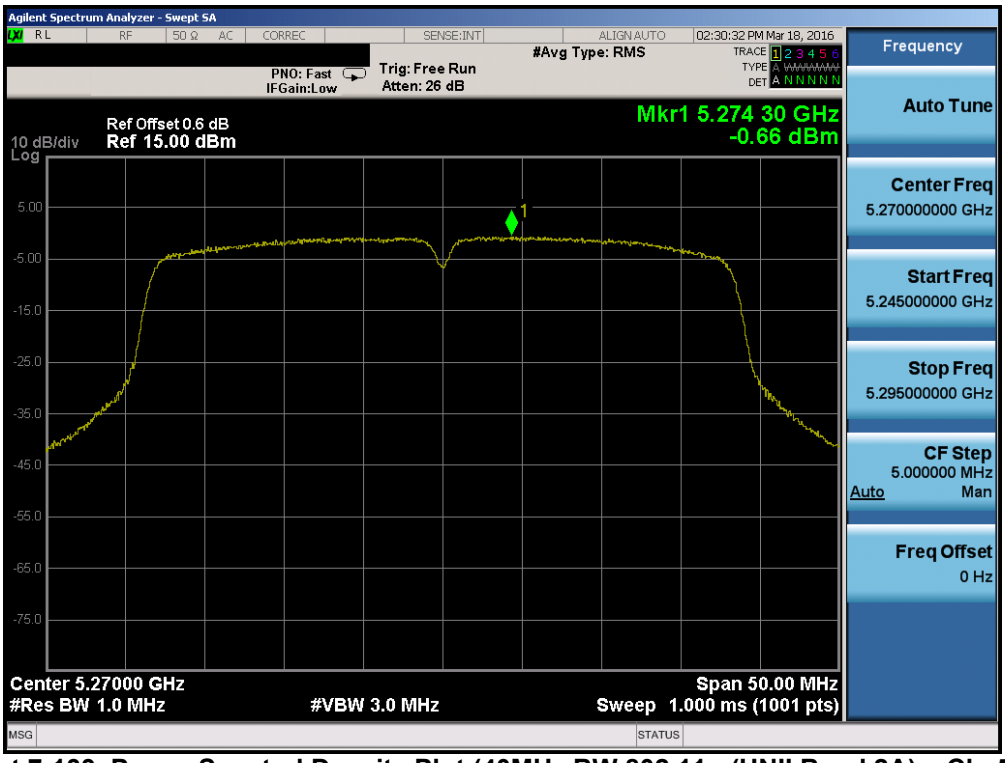

Plot 7-133. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

© 2016 PCTEST Engineering Laboratory, Inc.

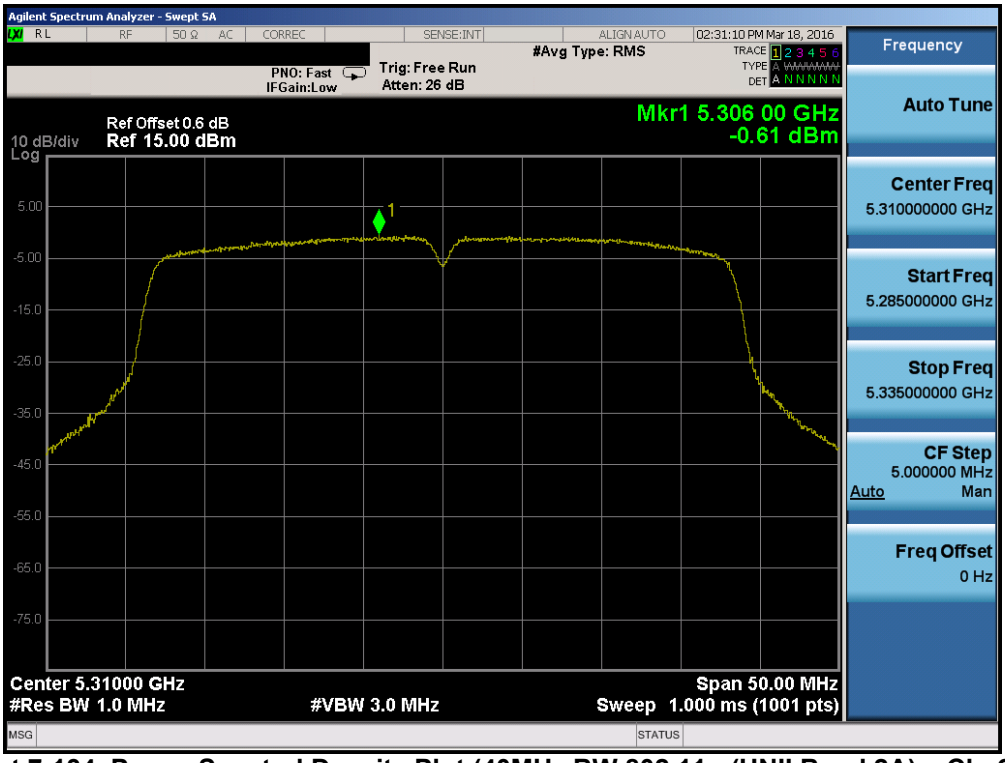

Plot 7-134. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

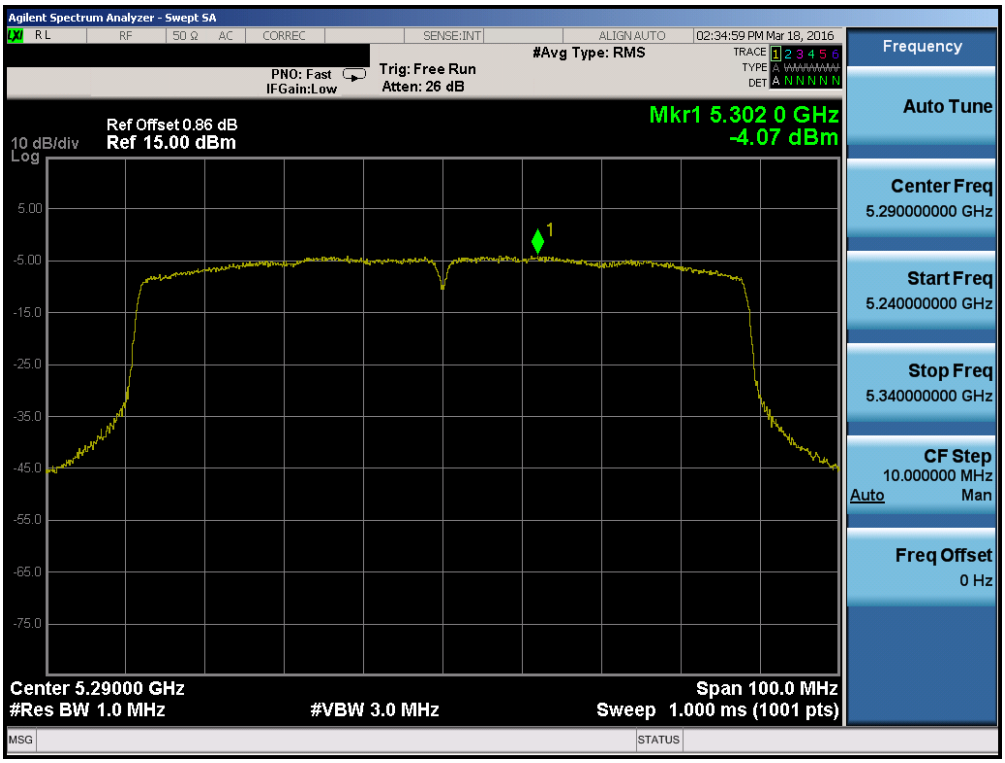

Plot 7-135. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

© 2016 PCTEST Engineering Laboratory, Inc.

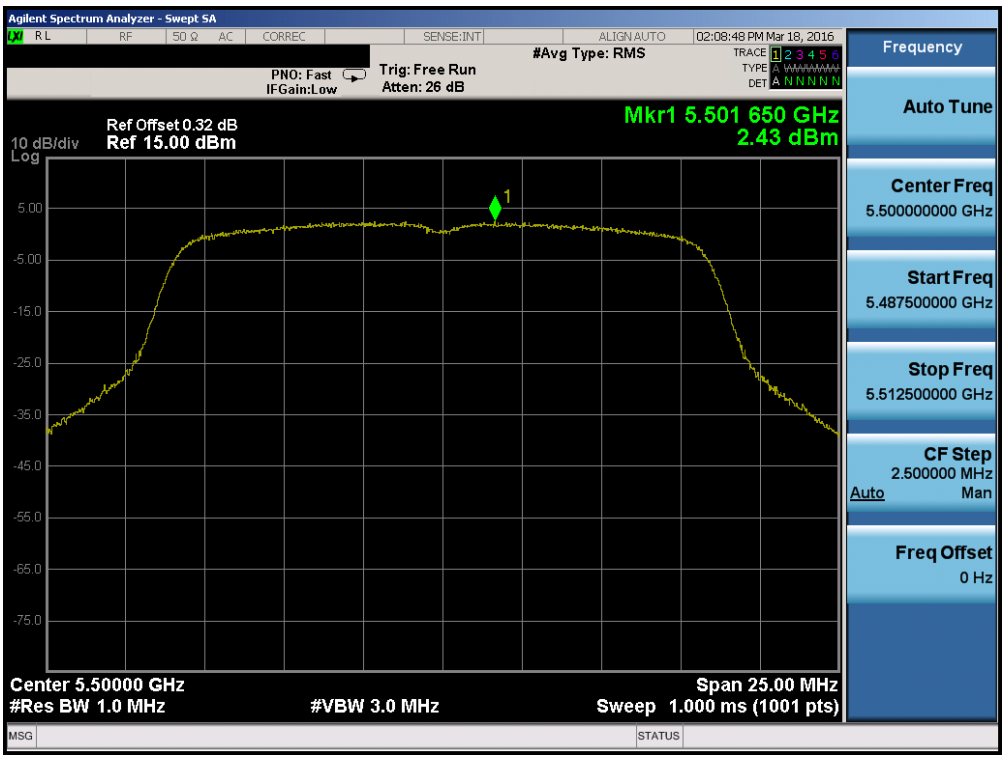

Plot 7-136. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 100)

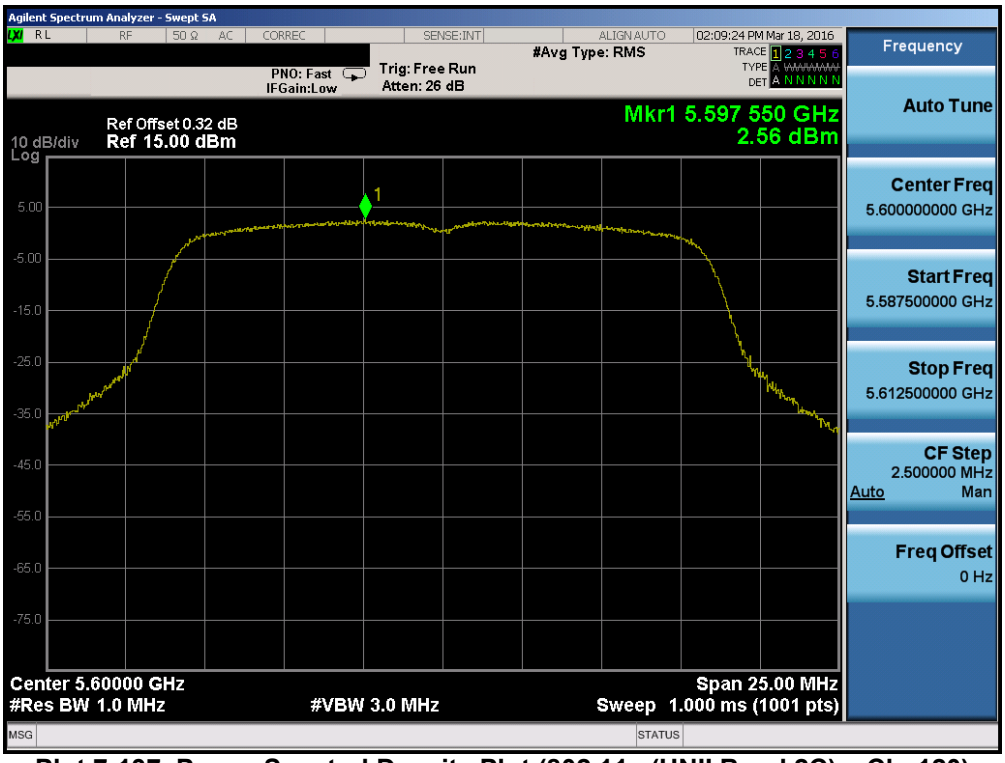

Plot 7-137. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 120)

© 2016 PCTEST Engineering Laboratory, Inc.

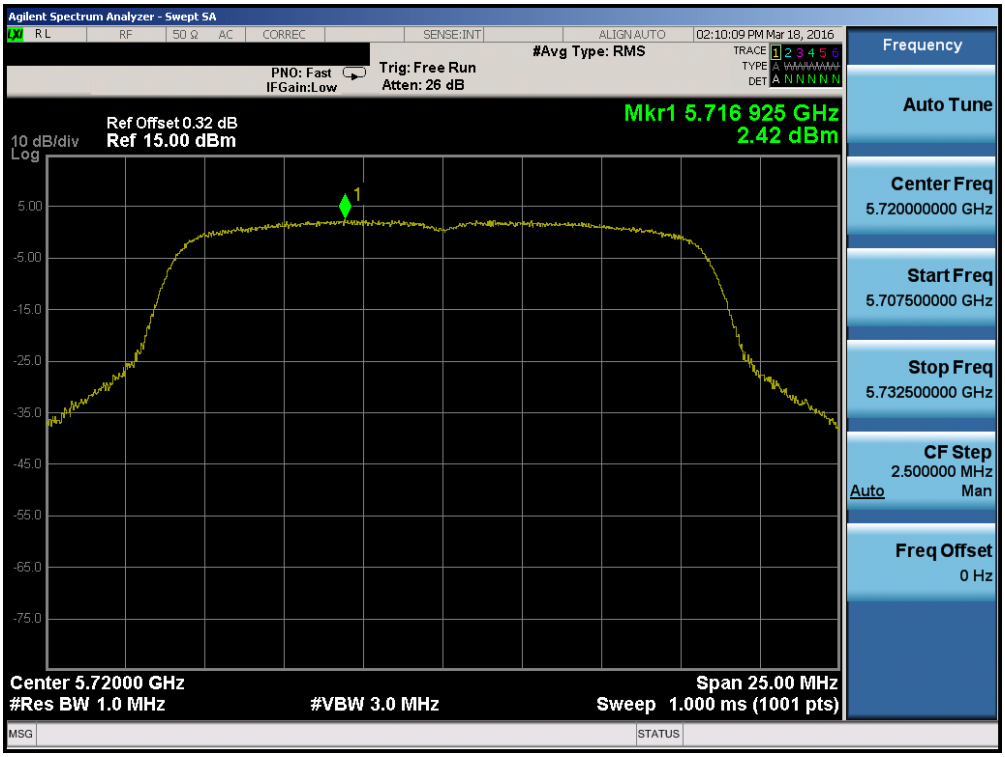

Plot 7-138. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 144)

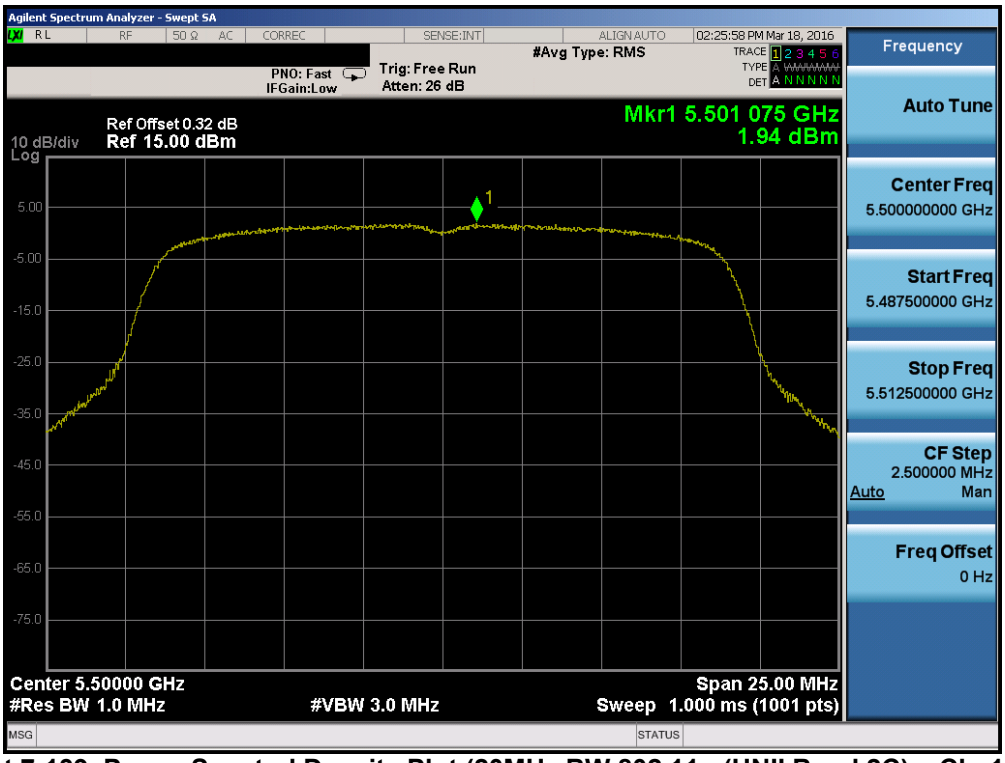

Plot 7-139. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

© 2016 PCTEST Engineering Laboratory, Inc.

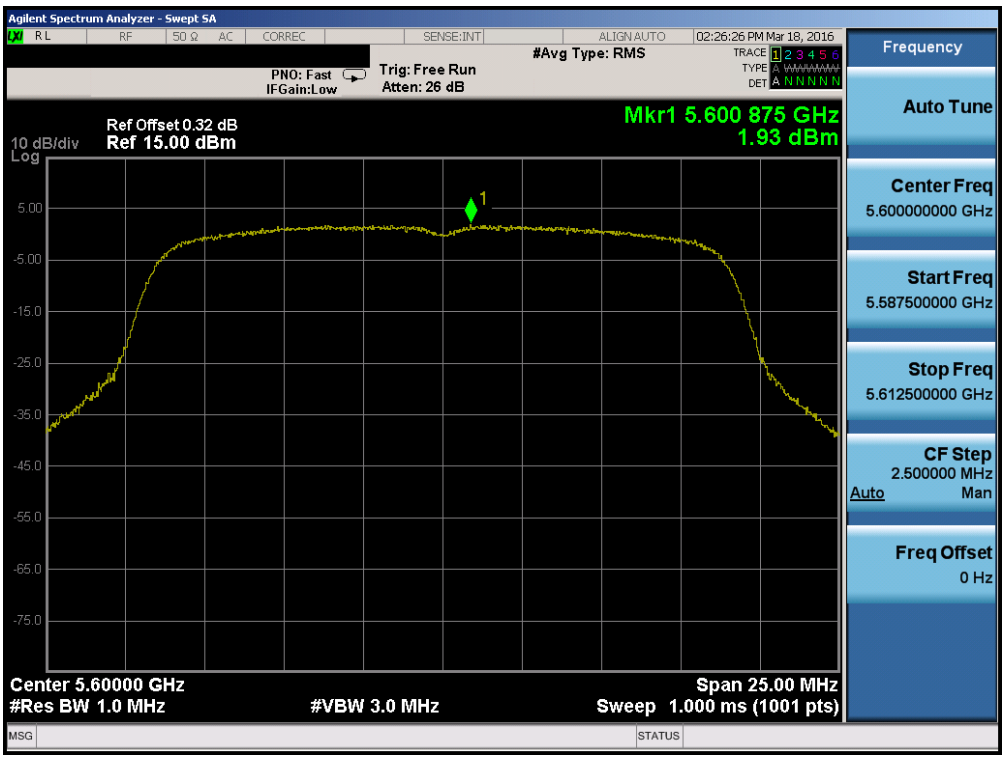

Plot 7-140. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 120)

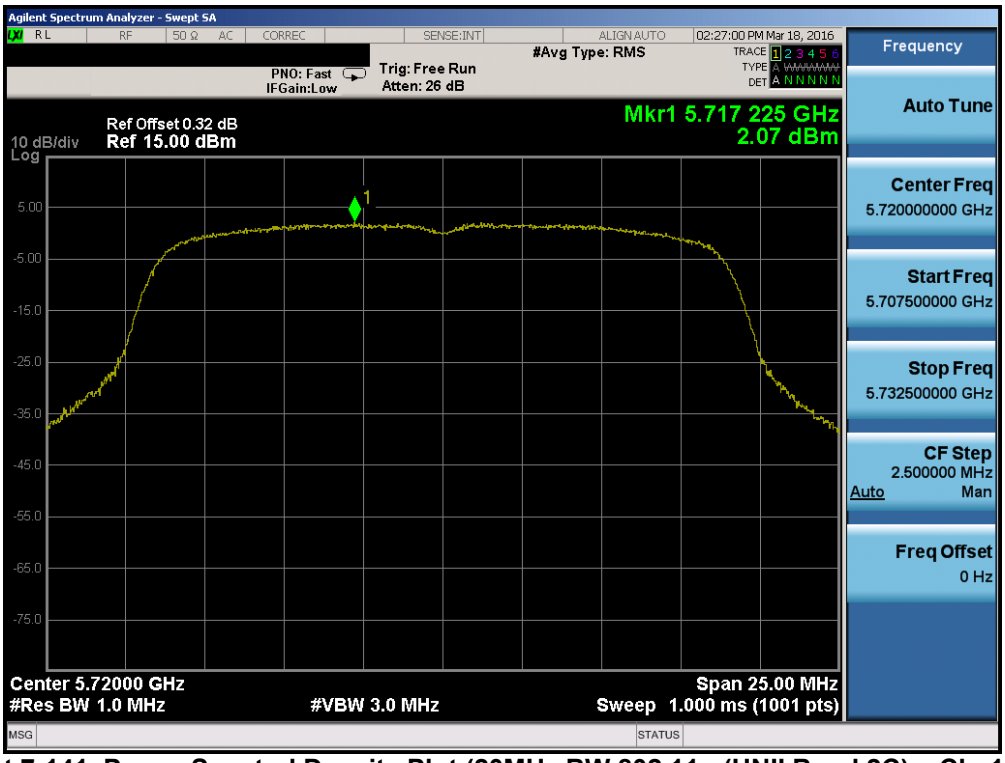

Plot 7-141. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

© 2016 PCTEST Engineering Laboratory, Inc.

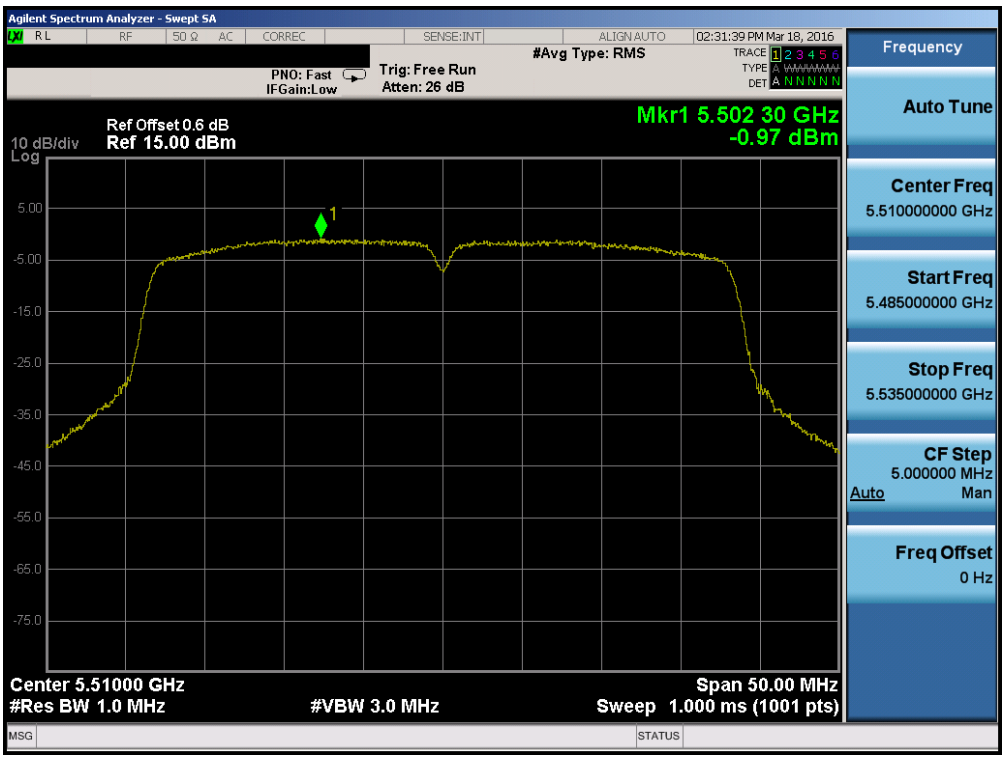

Plot 7-142. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

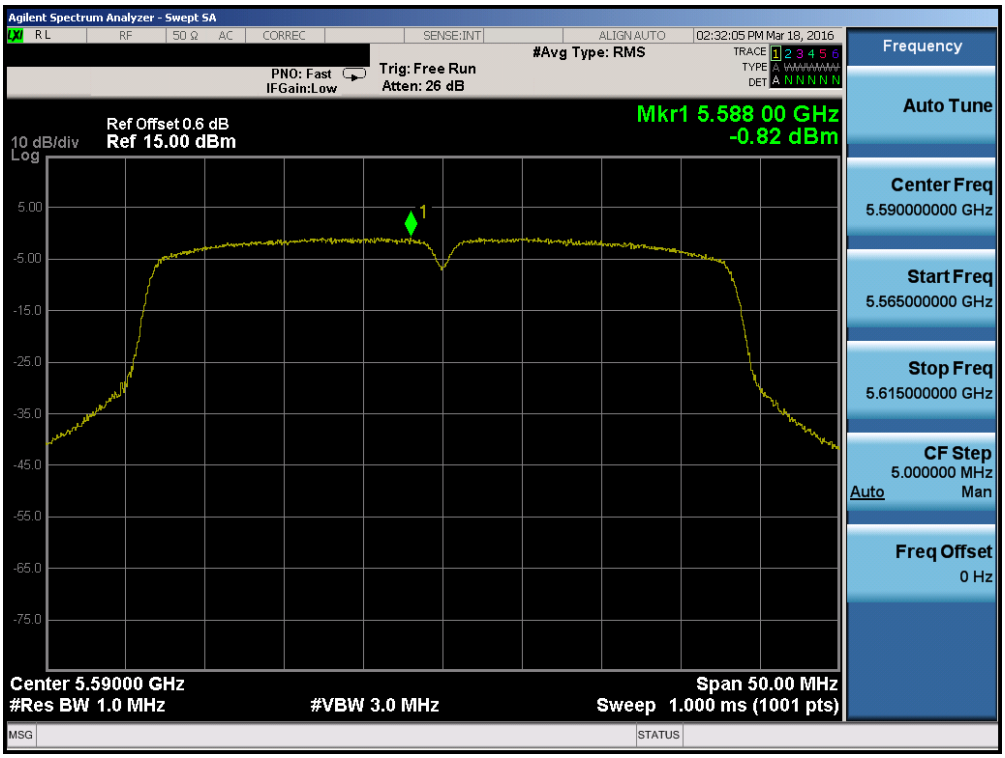

Plot 7-143. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 118)

© 2016 PCTEST Engineering Laboratory, Inc.

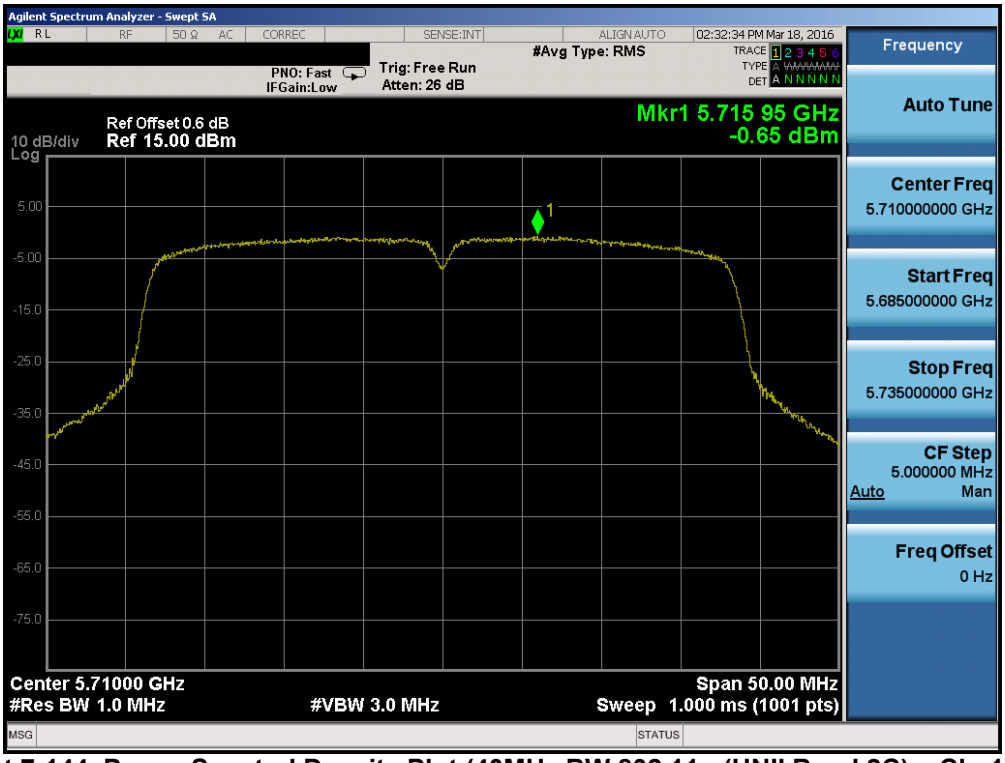

Plot 7-144. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

Plot 7-145. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

© 2016 PCTEST Engineering Laboratory, Inc.

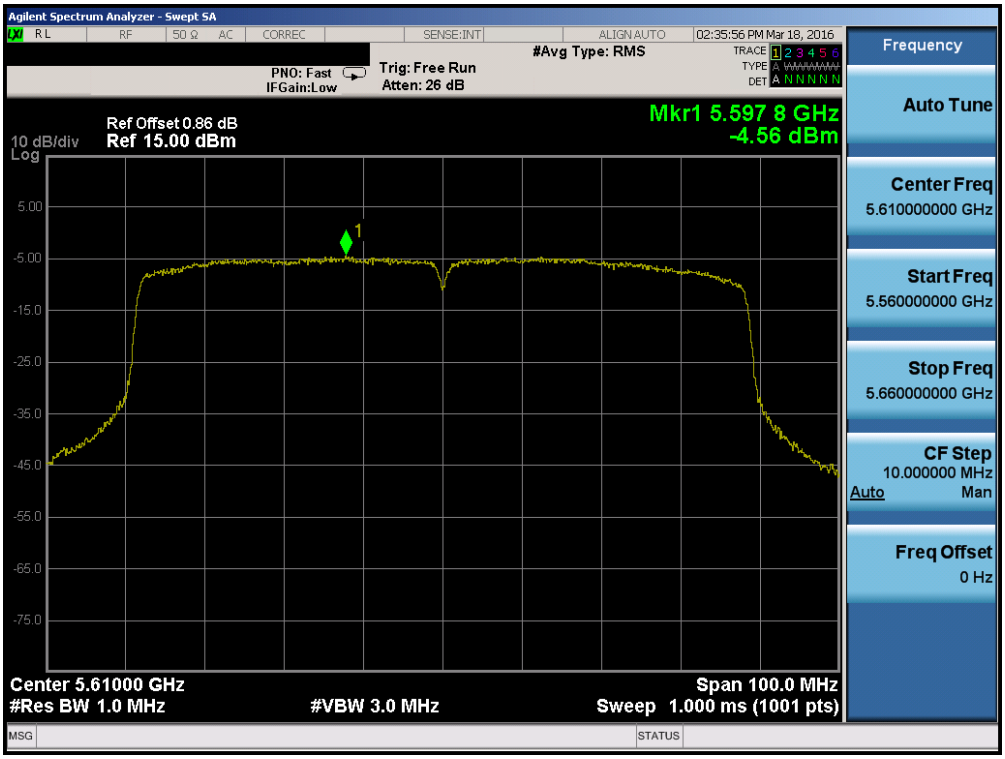

Plot 7-146. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 122)

Plot 7-147. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)

© 2016 PCTEST Engineering Laboratory, Inc.

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]	Pass / Fail
Band 3	5745	149	a	6	-0.35	30.0	-30.35	Pass
	5785	157	a	6	-0.25	30.0	-30.25	Pass
	5825	165	a	6	-0.18	30.0	-30.18	Pass
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	0.33	30.0	-29.67	Pass
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	0.43	30.0	-29.57	Pass
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	0.22	30.0	-29.78	Pass
	5755	151	n (40MHz)	13.5/15 (MCS0)	-3.54	30.0	-33.54	Pass
	5795	159	n (40MHz)	13.5/15 (MCS0)	-3.18	30.0	-33.18	Pass
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	-2.84	30.0	-32.84	Pass

Table 7-20. Band 3 Conducted Power Spectral Density Measurements

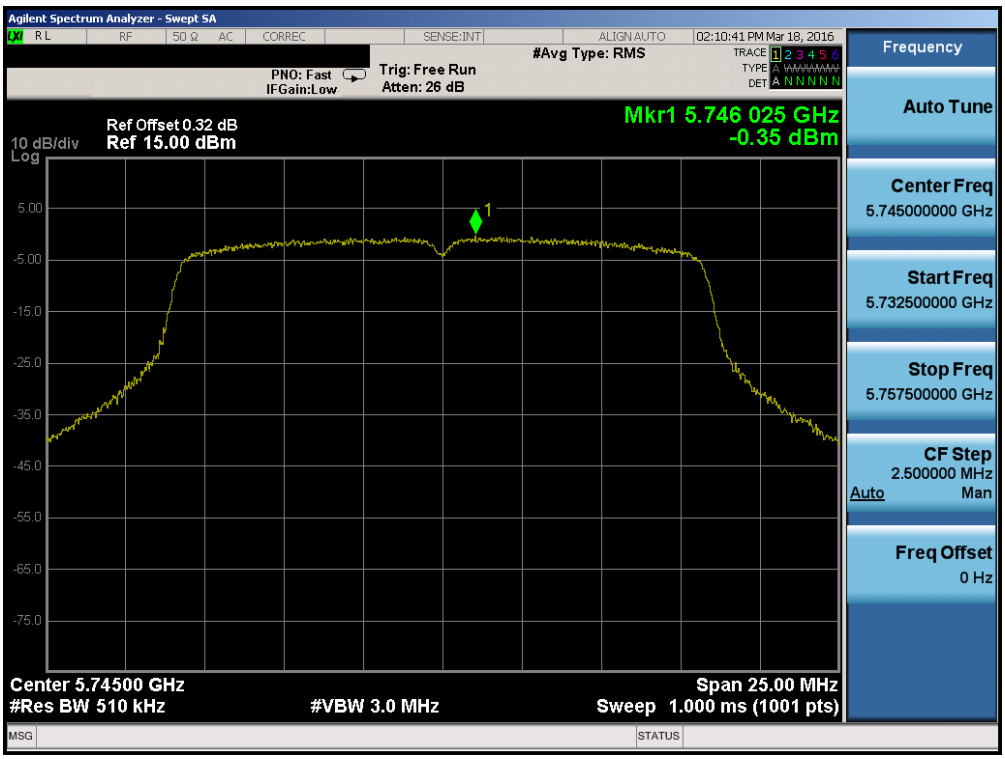

Plot 7-148. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 149)

© 2016 PCTEST Engineering Laboratory, Inc.

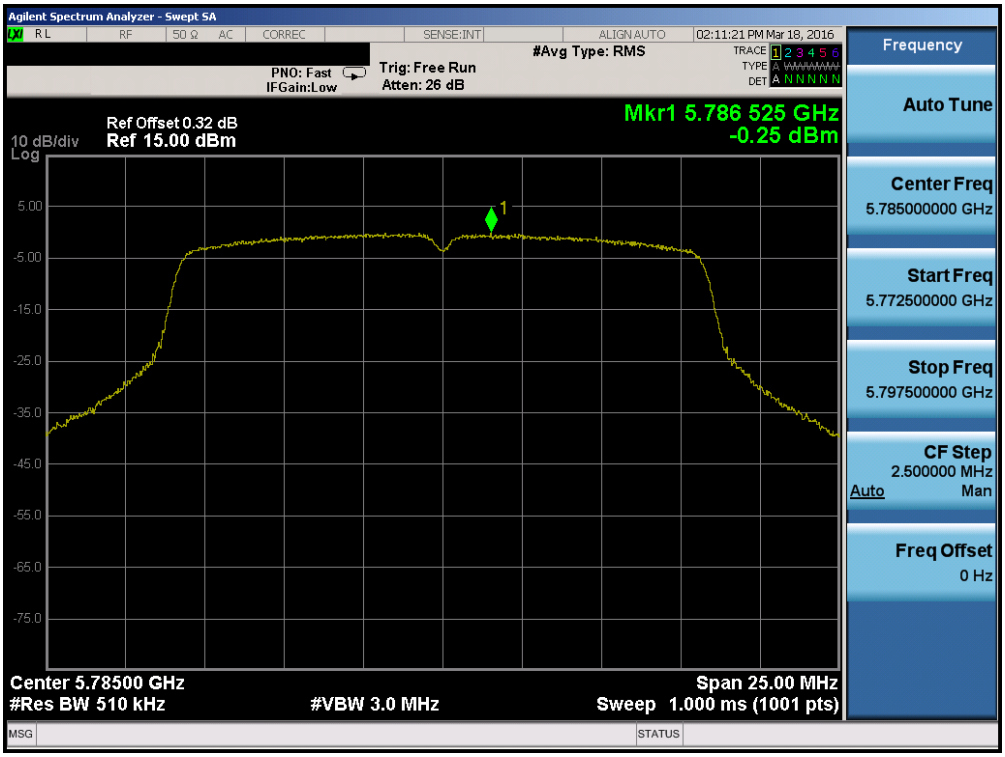

Plot 7-149. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 157)

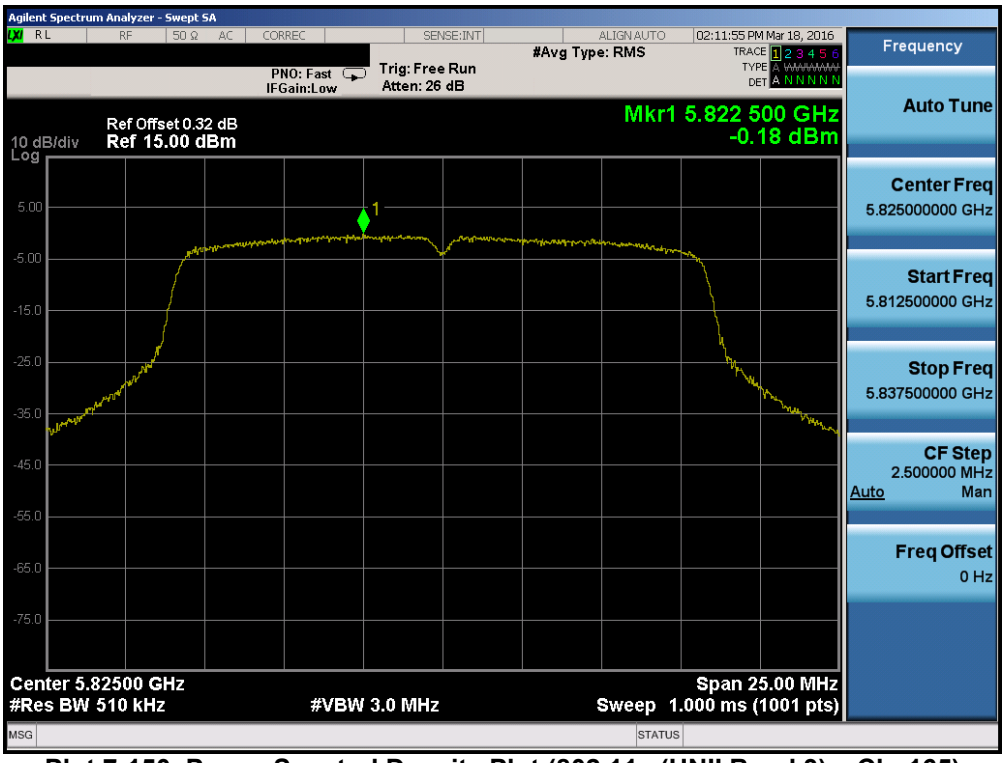

Plot 7-150. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 165)

© 2016 PCTEST Engineering Laboratory, Inc.

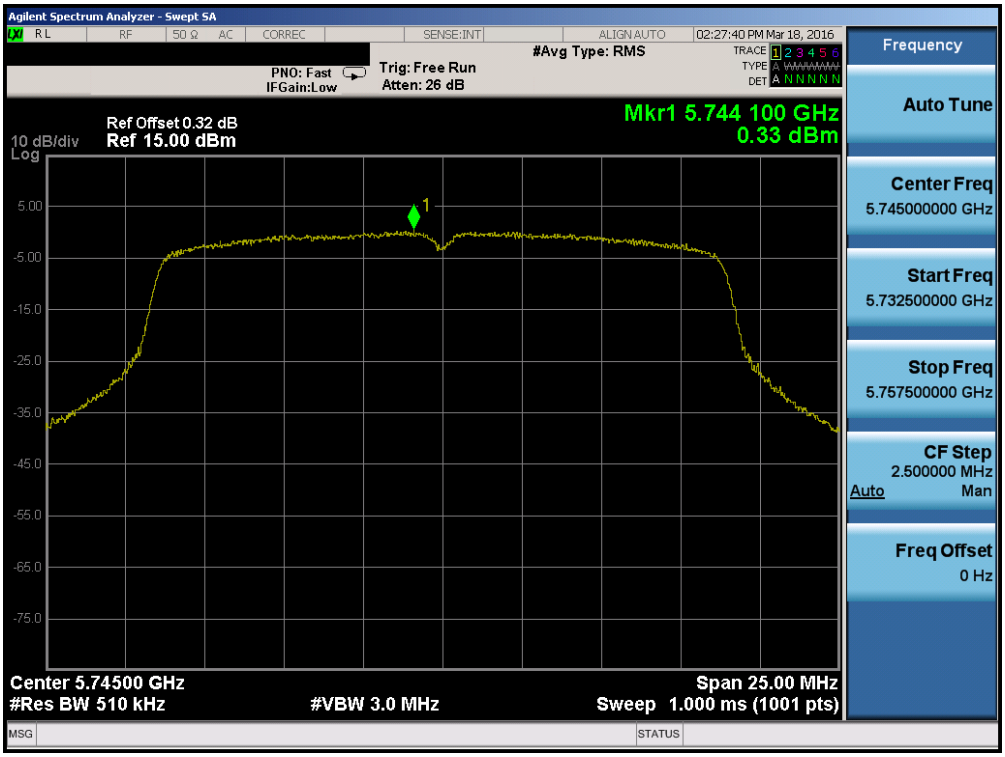

Plot 7-151. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

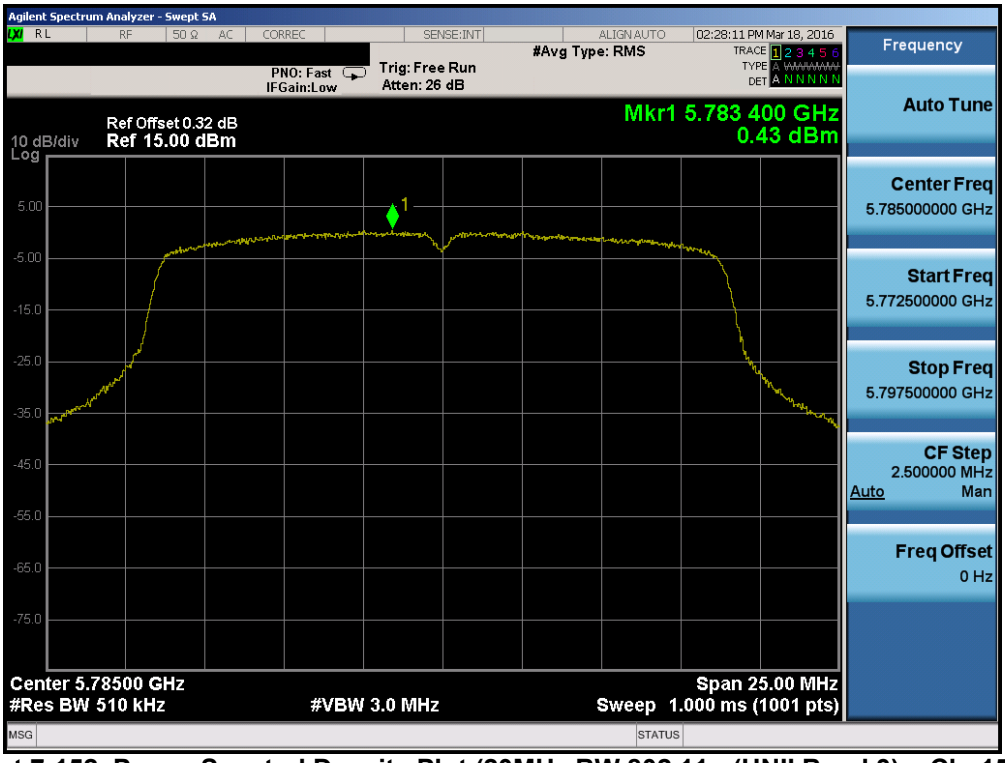

Plot 7-152. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

© 2016 PCTEST Engineering Laboratory, Inc.

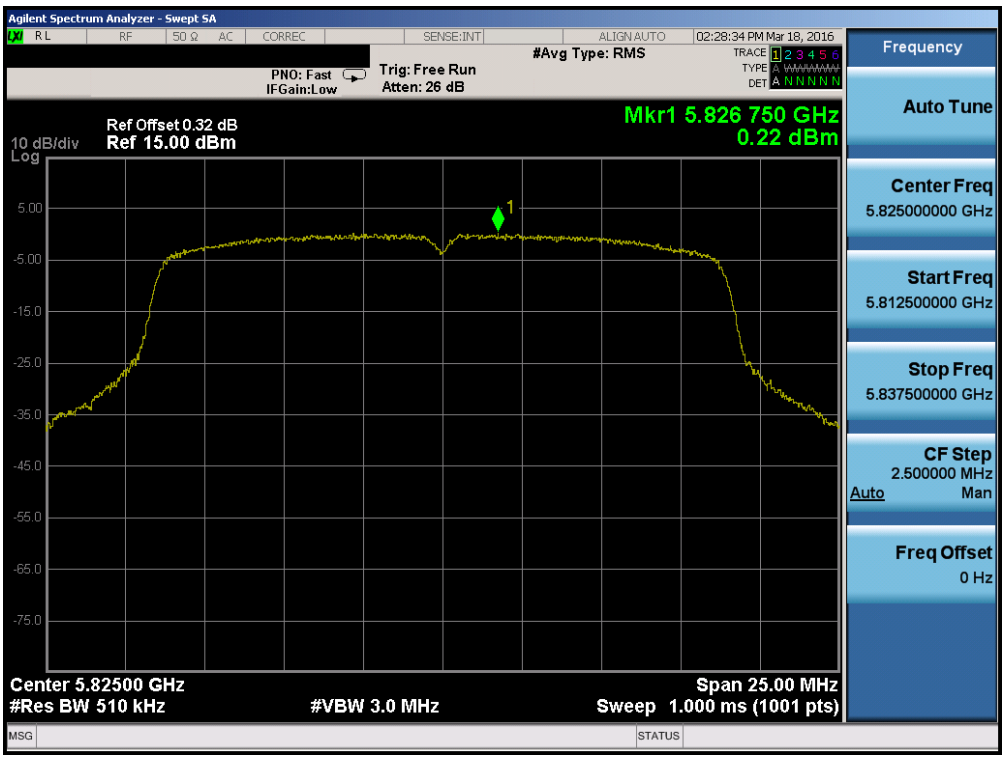

Plot 7-153. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

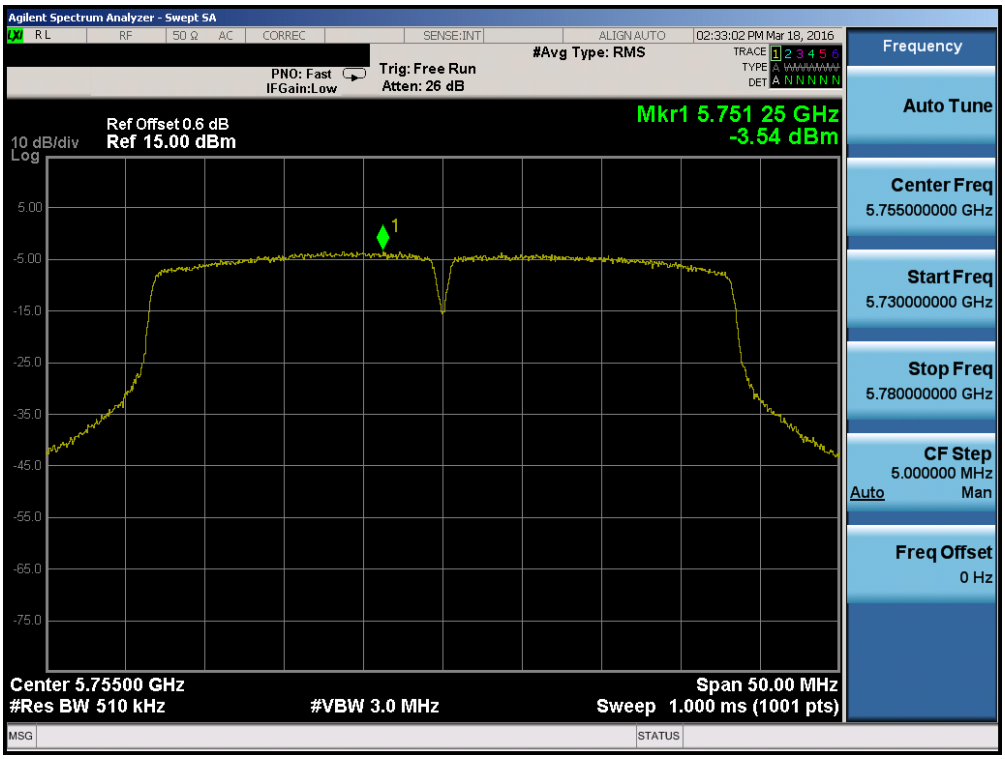

Plot 7-154. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

© 2016 PCTEST Engineering Laboratory, Inc.

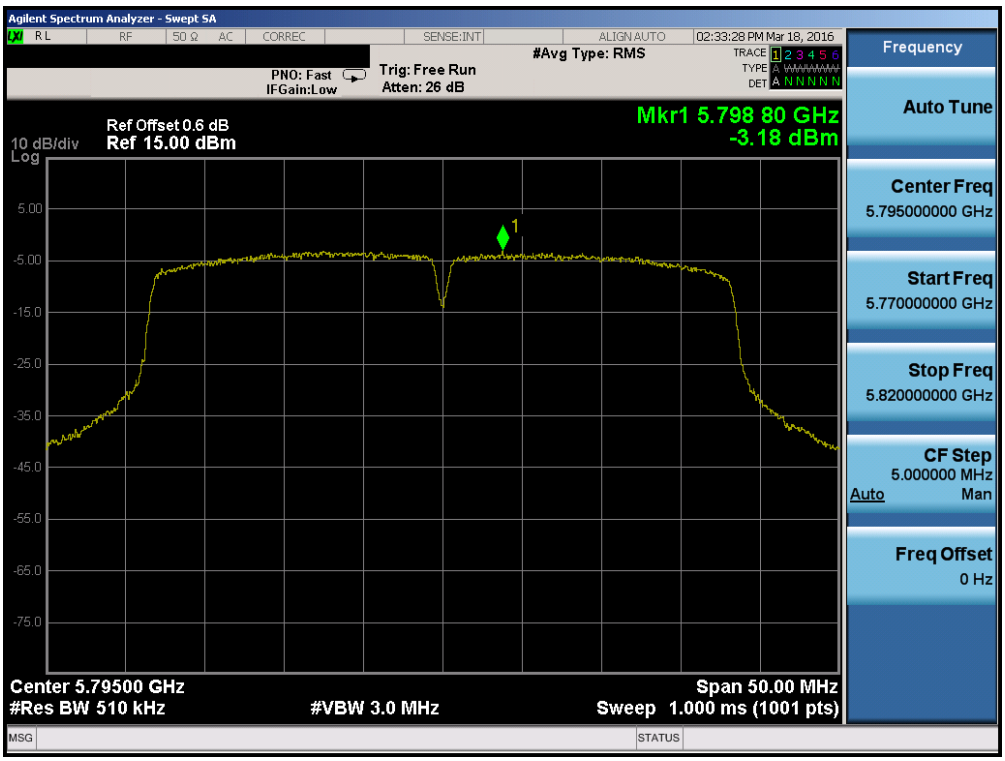

Plot 7-155. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

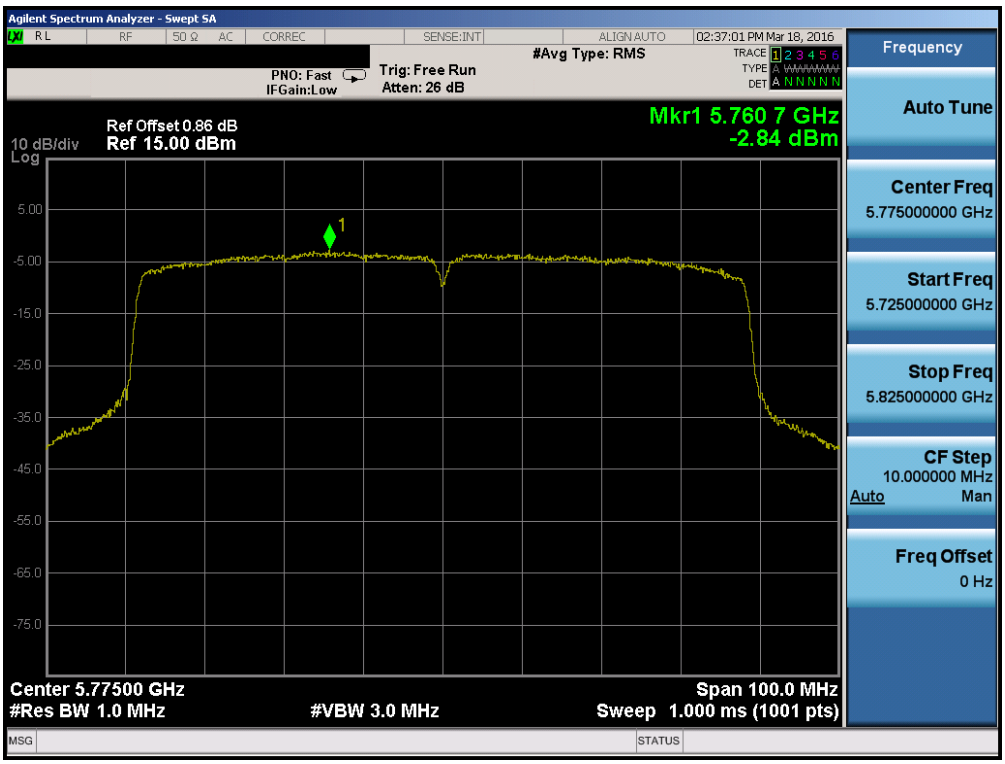

Plot 7-156. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

© 2016 PCTEST Engineering Laboratory, Inc.

Summed MIMO Power Spectral Density Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Antenn-1 Power Density [dBm]	Antenn-2 Power Density [dBm]	Summed MIMO Power Density [dBm]	Max Permissible Power Density [dBm/MHz]	Margin [dB]	Pass / Fail
Band 1	5180	36	n (20MHz)	6.5/7.2 (MCS0)	2.37	2.22	5.31	11.0	-5.69	Pass
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	2.74	2.35	5.56	11.0	-5.44	Pass
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	2.92	2.04	5.51	11.0	-5.49	Pass
	5190	38	n (40MHz)	13.5/15 (MCS0)	0.26	-0.46	2.92	11.0	-8.08	Pass
	5230	46	n (40MHz)	13.5/15 (MCS0)	0.32	-0.45	2.96	11.0	-8.04	Pass
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	-3.66	-3.67	-0.66	11.0	-11.66	Pass
Band 2A	5260	52	n (20MHz)	6.5/7.2 (MCS0)	2.99	2.10	5.58	11.0	-5.42	Pass
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	2.68	2.18	5.45	11.0	-5.55	Pass
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	2.52	2.40	5.47	11.0	-5.53	Pass
	5270	54	n (40MHz)	13.5/15 (MCS0)	0.22	-0.66	2.81	11.0	-8.19	Pass
	5310	62	n (40MHz)	13.5/15 (MCS0)	-0.44	-0.61	2.49	11.0	-8.51	Pass
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	-3.69	-4.07	-0.87	11.0	-11.87	Pass
Band 2C	5500	100	n (20MHz)	6.5/7.2 (MCS0)	2.67	1.94	5.33	11.0	-5.67	Pass
	5600	120	n (20MHz)	6.5/7.2 (MCS0)	2.71	1.93	5.35	11.0	-5.65	Pass
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	2.68	2.07	5.40	11.0	-5.60	Pass
	5510	102	n (40MHz)	13.5/15 (MCS0)	0.42	-0.97	2.79	11.0	-8.21	Pass
	5590	118	n (40MHz)	13.5/15 (MCS0)	0.40	-0.82	2.84	11.0	-8.16	Pass
	5710	142	n (40MHz)	13.5/15 (MCS0)	0.00	-0.65	2.70	11.0	-8.30	Pass
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	-3.99	-4.43	-1.20	11.0	-12.20	Pass
	5610	122	ac (80MHz)	29.3/32.5 (MCS0)	-3.87	-4.56	-1.19	11.0	-12.19	Pass

Table 7-21. Bands 1, 2A, 2C MIMO Conducted Power Spectral Density Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Antenn-1 Power Density [dBm]	Antenn-2 Power Density [dBm]	Summed MIMO Power Density [dBm]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]	Pass / Fail
Band 3	5745	149	n (20MHz)	6.5/7.2 (MCS0)	0.03	0.33	3.19	30.0	-26.81	Pass
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	-0.12	0.43	3.17	30.0	-26.83	Pass
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	0.14	0.22	3.19	30.0	-26.81	Pass
	5755	151	n (40MHz)	13.5/15 (MCS0)	-2.66	-3.54	-0.07	30.0	-30.07	Pass
	5795	159	n (40MHz)	13.5/15 (MCS0)	-2.62	-3.18	0.12	30.0	-29.88	Pass
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	-3.47	-2.84	-0.13	30.0	-30.13	Pass

Table 7-22. Band 3 MIMO Conducted Power Spectral Density Measurements

Note:

Per KDB 662911 v02r01 Section E)2), the power spectral density at Antenna 1 and Antenna 2 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

At 5180MHz the average conducted power spectral density was measured to be 2.37 dBm for Antenna-1 and 2.22 dBm for Antenna-2.

Antenna 1 + Antenna 2 = MIMO

(2.37 dBm + 2.22 dBm) = (1.72 mW + 1.67 mW) = 3.39 mW = 5.31 dBm

© 2016 PCTEST Engineering Laboratory, Inc.

7.6 Frequency Stability

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,180,000,000 Hz

CHANNEL: 36

REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	5,179,999,982	-18	-0.00000035
100 %		- 30	5,179,999,784	-216	-0.00000417
100 %		- 20	5,179,999,990	-10	-0.00000019
100 %		- 10	5,180,000,174	174	0.00000336
100 %		0	5,179,999,854	-146	-0.00000282
100 %		+ 10	5,179,999,956	-44	-0.00000085
100 %		+ 20	5,180,000,003	3	0.00000006
100 %		+ 30	5,179,999,965	-35	-0.00000068
100 %		+ 40	5,180,000,129	129	0.00000249
100 %		+ 50	5,179,999,830	-170	-0.00000328
BATT. ENDPOINT	3.45	+ 20	5,180,000,234	234	0.00000452

Table 7-23. Frequency Stability Measurements for UNII Band 1 (Ch. 36)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

© 2016 PCTEST Engineering Laboratory, Inc.

Frequency Stability
§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,260,000,000 Hz

CHANNEL: 52

REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	5,259,999,828	-172	-0.00000327
100 %		- 30	5,260,000,001	1	0.00000002
100 %		- 20	5,259,999,984	-16	-0.00000030
100 %		- 10	5,259,999,763	-237	-0.00000451
100 %		0	5,259,999,719	-281	-0.00000534
100 %		+ 10	5,259,999,891	-109	-0.00000207
100 %		+ 20	5,260,000,188	188	0.00000357
100 %		+ 30	5,259,999,986	-14	-0.00000027
100 %		+ 40	5,260,000,277	277	0.00000527
100 %		+ 50	5,260,000,136	136	0.00000259
BATT. ENDPOINT	3.45	+ 20	5,260,000,162	162	0.00000308

Table 7-24. Frequency Stability Measurements for UNII Band 2A (Ch. 52)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

© 2016 PCTEST Engineering Laboratory, Inc.

Frequency Stability
§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,500,000,000 Hz

CHANNEL: 100

REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	5,500,000,245	245	0.00000445
100 %		- 30	5,500,000,109	109	0.00000198
100 %		- 20	5,499,999,904	-96	-0.00000175
100 %		- 10	5,499,999,857	-143	-0.00000260
100 %		0	5,499,999,747	-253	-0.00000460
100 %		+ 10	5,500,000,180	180	0.00000327
100 %		+ 20	5,499,999,980	-20	-0.00000036
100 %		+ 30	5,499,999,846	-154	-0.00000280
100 %		+ 40	5,500,000,002	2	0.00000004
100 %		+ 50	5,499,999,867	-133	-0.00000242
BATT. ENDPOINT	3.45	+ 20	5,499,999,858	-142	-0.00000258

Table 7-25. Frequency Stability Measurements for UNII Band 2C (Ch. 100)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

© 2016 PCTEST Engineering Laboratory, Inc.

Frequency Stability
§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,745,000,000 Hz

CHANNEL: 149

REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	5,745,000,268	268	0.00000466
100 %		- 30	5,745,000,132	132	0.00000230
100 %		- 20	5,745,000,022	22	0.00000038
100 %		- 10	5,745,000,012	12	0.00000021
100 %		0	5,744,999,839	-161	-0.00000280
100 %		+ 10	5,744,999,949	-51	-0.00000089
100 %		+ 20	5,745,000,247	247	0.00000430
100 %		+ 30	5,745,000,364	364	0.00000634
100 %		+ 40	5,745,000,053	53	0.00000092
100 %		+ 50	5,745,000,092	92	0.00000160
BATT. ENDPOINT	3.45	+ 20	5,744,999,923	-77	-0.00000134

Table 7-26. Frequency Stability Measurements for UNII Band 3 (Ch. 149)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

© 2016 PCTEST Engineering Laboratory, Inc.

7.7 Radiated Spurious Emission Measurements – Above 1GHz

§15.407(b.1)(b.6) §15.205 §15.209

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01r02, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11n (20MHz BW), 802.11n (40MHz BW), and 802.11ac (80MHz)), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-27 per Section 15.209.

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-27. Radiated Limits

Test Procedures Used

KDB 789033 D02 v01r02 – Section G

Test Settings

Average Measurements above 1GHz (Method AD)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be ≥ 2 x span/RBW)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

© 2016 PCTEST Engineering Laboratory, Inc.

Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

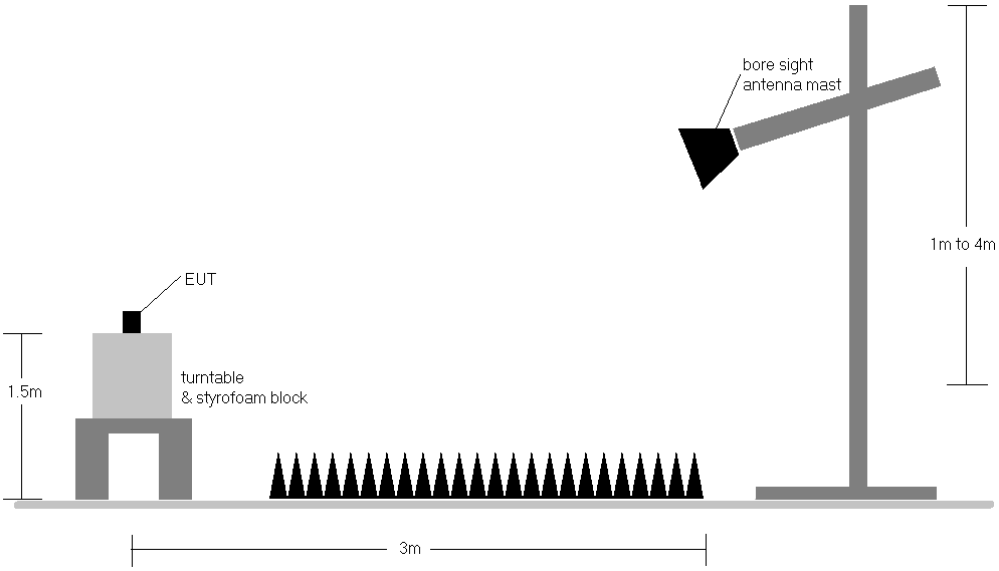

Figure 7-5. Test Instrument & Measurement Setup

Test Notes

1. All radiated spurious emissions levels were measured in a radiated test setup per the guidance of KDB 789033 D02 v01r02 Section G.
2. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 7-27.
3. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 6-11. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dBμV/m.

© 2016 PCTEST Engineering Laboratory, Inc.

4. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
5. This unit was tested with its standard battery.
6. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
7. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
8. Radiated spurious emissions were investigated while operating in MIMO mode, however, it was determined that single antenna operation produced the worst case emissions. Since the emissions produced from MIMO operation were found to be more than 20dB below the limit, the MIMO emissions are not reported.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section. Rohde & Schwarz EMC32, Version 9.15.00 automated test software was used to perform the Radiated Spurious Emissions Pre-Scan testing.
10. The "-" shown in the RSE tables below denotes a noise floor measurement.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]}$ = Analyzer Level $_{[dBm]}$ + 107 + AFCL $_{[dB/m]}$
- AFCL $_{[dB/m]}$ = Antenna Factor $_{[dB/m]}$ + Cable Loss $_{[dB]}$
- Margin $_{[dB]}$ = Field Strength Level $_{[dB\mu V/m]}$ – Limit $_{[dB\mu V/m]}$

Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 6.8 was calculated using the formula:
  Offset (dB) = (Antenna Factor + Cable Loss + 10 dB Attenuator) – Preamplifier Gain

© 2016 PCTEST Engineering Laboratory, Inc.

7.7.1 Antenna-1 Radiated Spurious Emission Measurements

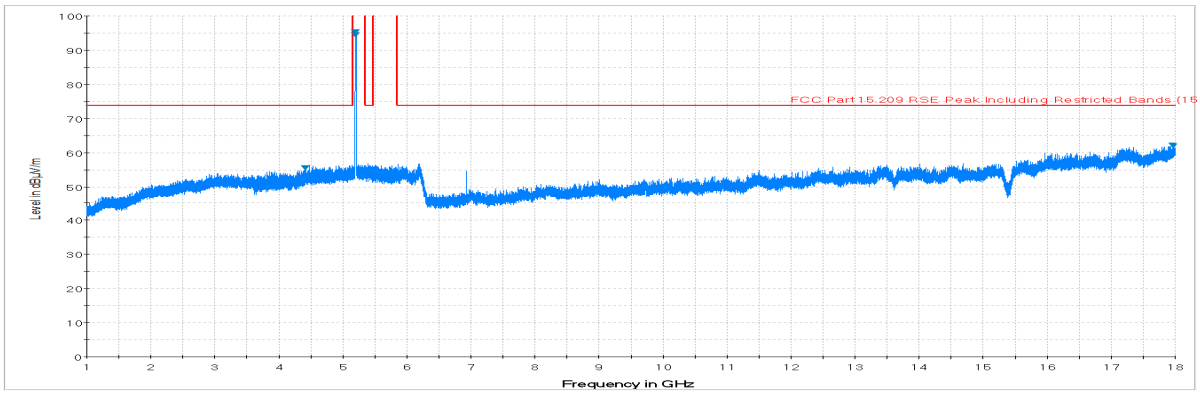

Plot 7-157. Radiated Spurious Plot above 1GHz (802.11a – U1 Ch. 40, Ant. Pol. H)

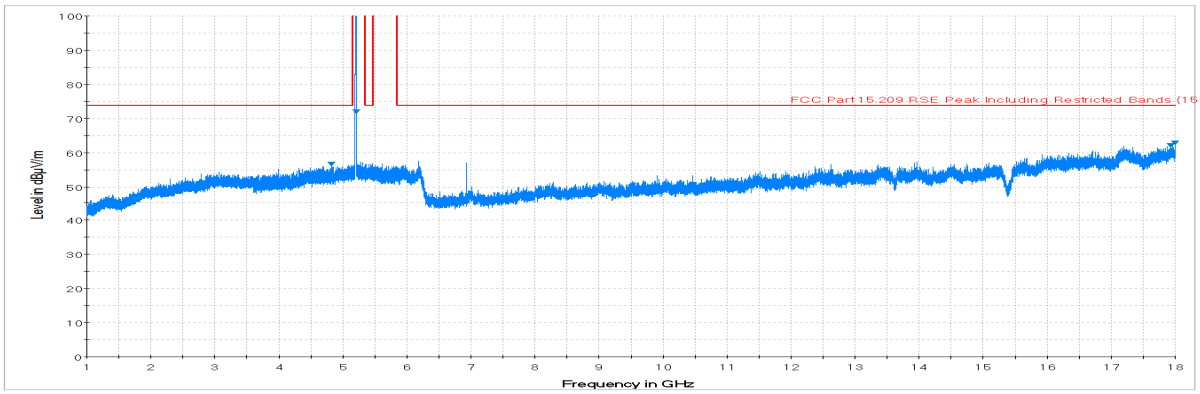

Plot 7-158. Radiated Spurious Plot above 1GHz (802.11a – U1 Ch. 40, Ant. Pol. V)

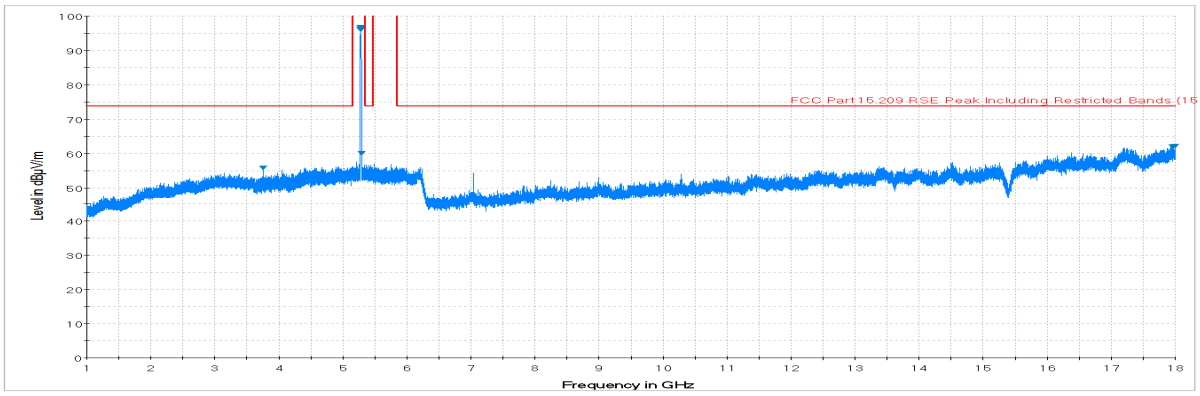

Plot 7-159. Radiated Spurious Plot above 1GHz (802.11a – U2A Ch. 56, Ant. Pol. H)

© 2016 PCTEST Engineering Laboratory, Inc.

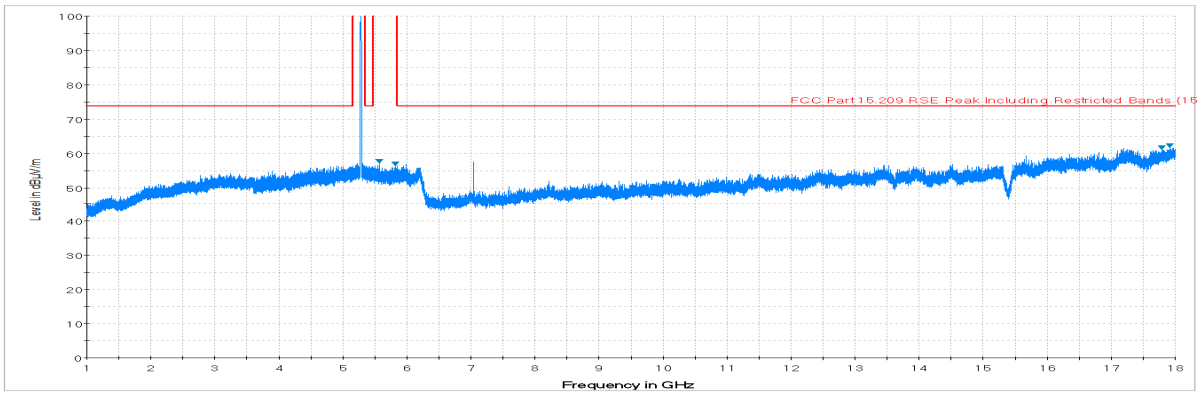

Plot 7-160. Radiated Spurious Plot above 1GHz (802.11a – U2A Ch. 56, Ant. Pol. V)

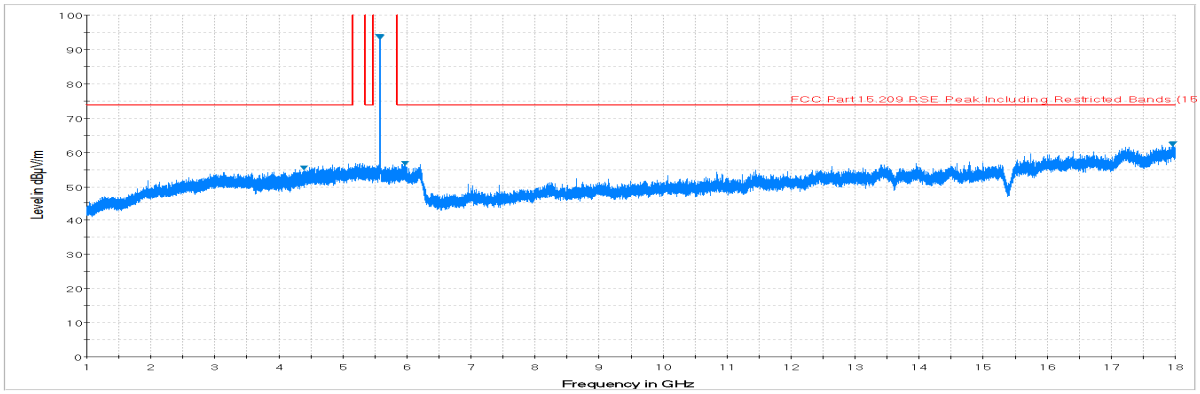

Plot 7-161. Radiated Spurious Plot above 1GHz (802.11a – U2C Ch. 116, Ant. Pol. H)

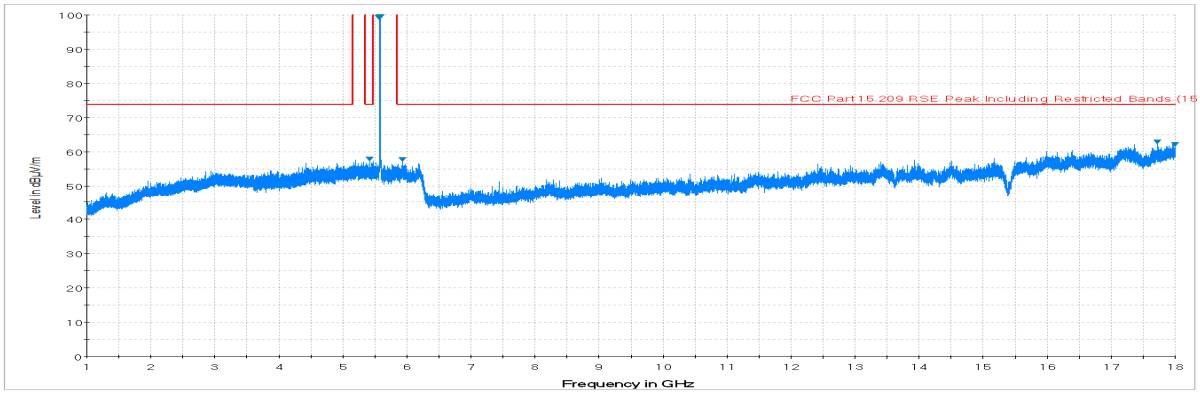

Plot 7-162. Radiated Spurious Plot above 1GHz (802.11a – U2C Ch. 116, Ant. Pol. V)

© 2016 PCTEST Engineering Laboratory, Inc.

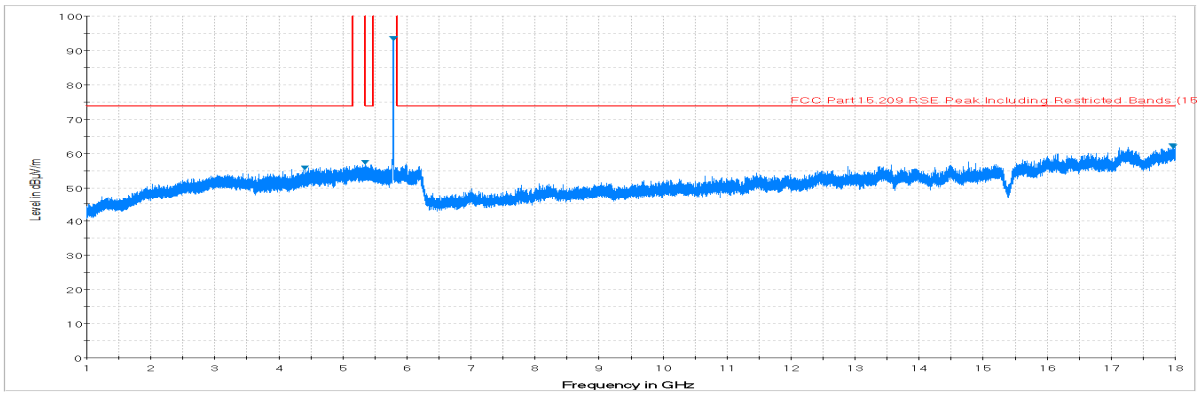

Plot 7-163. Radiated Spurious Plot above 1GHz (802.11a – U3 Ch. 157, Ant. Pol. H)

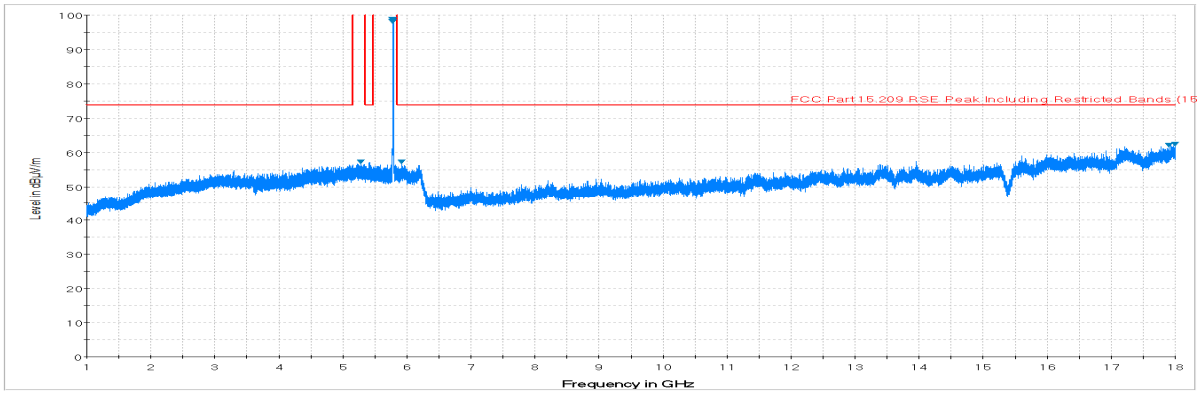

Plot 7-164. Radiated Spurious Plot above 1GHz (802.11a – U3 Ch. 157, Ant. Pol. V)

© 2016 PCTEST Engineering Laboratory, Inc.

Antenna-1 Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209

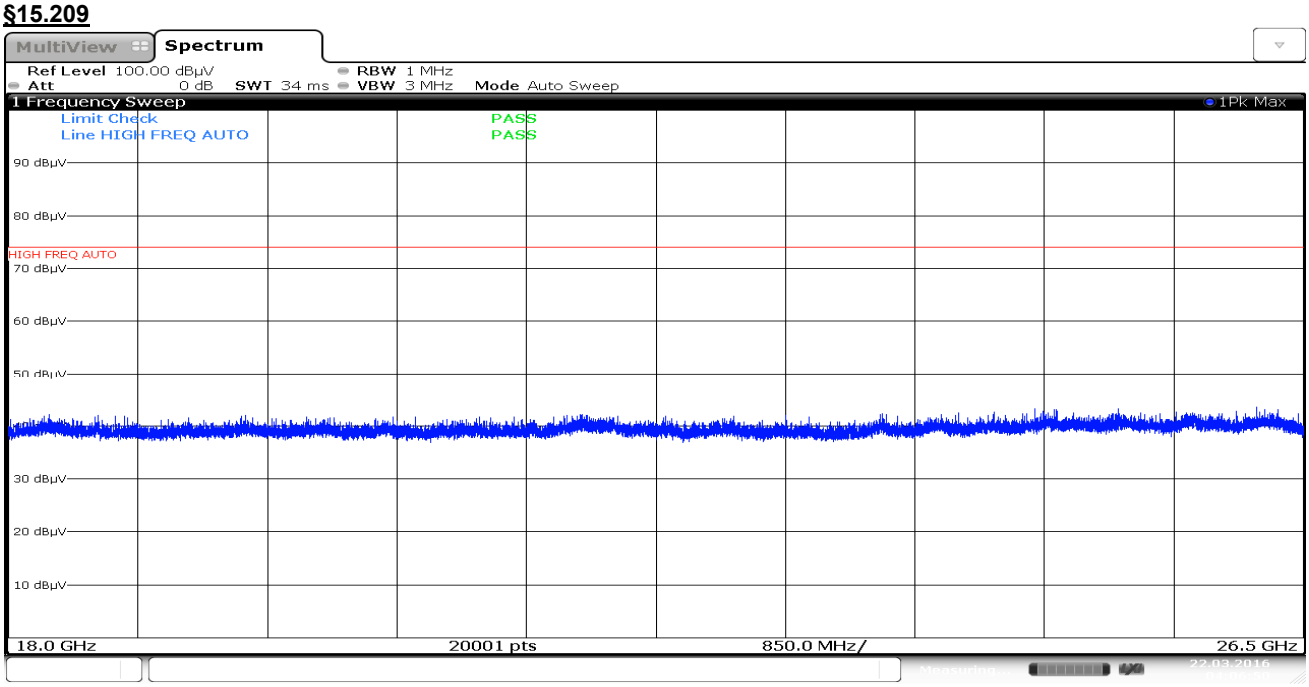

Date: 22.MAR.2016 04:06:51

Plot 7-165. Radiated Spurious Plot above 18GHz (802.11a – Ant. Pol. H)

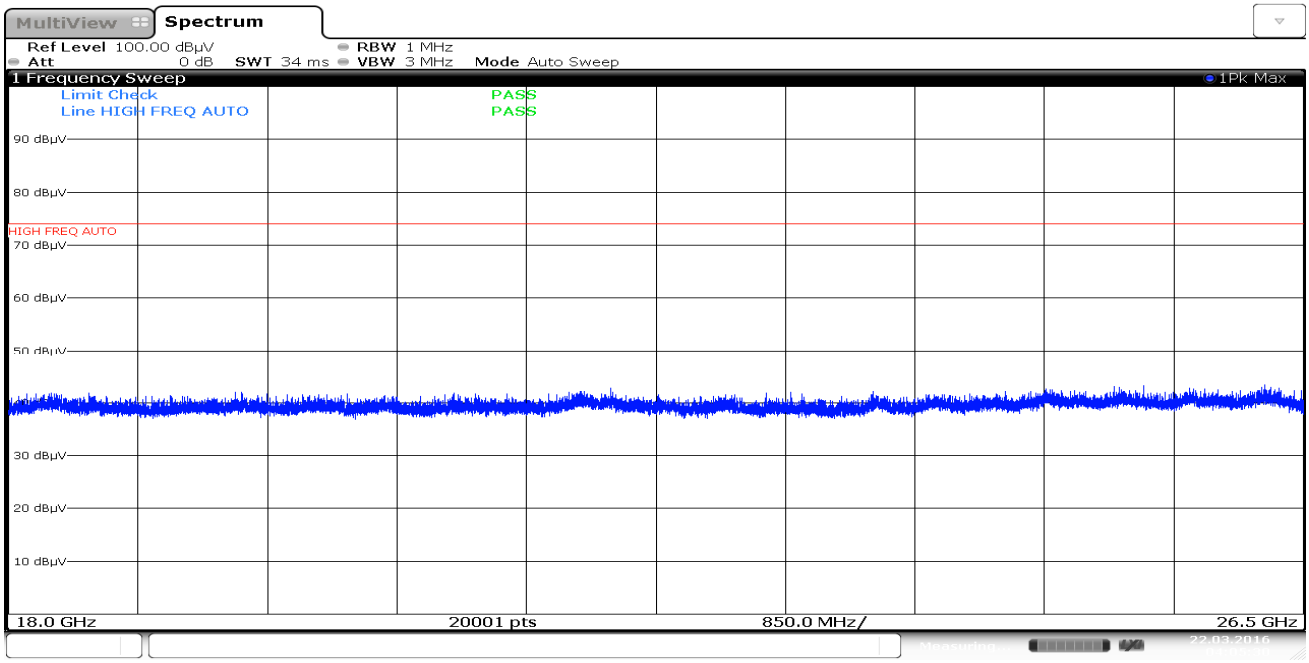

Date: 22.MAR.2016 04:05:30

Plot 7-166. Radiated Spurious Plot above 18GHz (802.11a – Ant. Pol. V)

© 2016 PCTEST Engineering Laboratory, Inc.

Antenna-1 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5180MHz
Channel: 36

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
	10360.00	Peak	H	-	-	-98.23	47.23	0.00	55.99	68.20	-12.21
*	15540.00	Average	H	-	-	-111.94	54.98	0.00	50.04	53.98	-3.94
*	15540.00	Peak	H	-	-	-99.83	54.98	0.00	62.15	73.98	-11.83
*	20720.00	Average	H	-	-	-112.46	44.39	-9.54	29.38	53.98	-24.60
*	20720.00	Peak	H	-	-	-102.13	44.39	-9.54	39.71	73.98	-34.27
	25900.00	Peak	H	-	-	-99.21	45.11	-9.54	43.36	68.20	-24.84

Table 7-28. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5200MHz
Channel: 40

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
	10400.00	Peak	H	-	-	-97.76	47.44	0.00	56.68	68.20	-11.52
*	15600.00	Average	H	-	-	-111.82	55.19	0.00	50.38	53.98	-3.60
*	15600.00	Peak	H	-	-	-99.55	55.19	0.00	62.65	73.98	-11.33
*	20800.00	Average	H	-	-	-112.32	44.39	-9.54	29.53	53.98	-24.45
*	20800.00	Peak	H	-	-	-100.58	44.39	-9.54	41.27	73.98	-32.71
	26000.00	Peak	H	-	-	-99.35	45.12	-9.54	43.22	68.20	-24.98

Table 7-29. Radiated Measurements

© 2016 PCTEST Engineering Laboratory, Inc.

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5240MHz
Channel: 48

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
	10480.00	Peak	H	-	-	-98.80	47.79	0.00	55.99	68.20	-12.21
*	15720.00	Average	H	-	-	-110.43	54.46	0.00	51.03	53.98	-2.95
*	15720.00	Peak	H	-	-	-98.11	54.46	0.00	63.35	73.98	-10.63
*	20960.00	Average	H	-	-	-113.30	44.31	-9.54	28.47	53.98	-25.51
*	20960.00	Peak	H	-	-	-100.65	44.31	-9.54	41.12	73.98	-32.86
	26200.00	Peak	H	-	-	-99.67	45.01	-9.54	42.80	68.20	-25.40

Table 7-30. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5260MHz
Channel: 52

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
	10520.00	Peak	H	-	-	-99.12	47.85	0.00	55.73	68.20	-12.47
*	15780.00	Average	H	-	-	-111.64	54.20	0.00	49.56	53.98	-4.42
*	15780.00	Peak	H	-	-	-100.31	54.20	0.00	60.89	73.98	-13.09
*	21040.00	Average	H	-	-	-113.04	44.29	-9.54	28.71	53.98	-25.27
*	21040.00	Peak	H	-	-	-99.70	44.29	-9.54	42.05	73.98	-31.93
	26300.00	Peak	H	-	-	-99.31	45.00	-9.54	43.14	68.20	-25.06

Table 7-31. Radiated Measurements

© 2016 PCTEST Engineering Laboratory, Inc.

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5280MHz
Channel: 56

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
	10560.00	Peak	H	-	-	-98.66	47.79	0.00	56.13	68.20	-12.07
*	15840.00	Average	H	-	-	-111.24	54.40	0.00	50.16	53.98	-3.82
*	15840.00	Peak	H	-	-	-99.77	54.40	0.00	61.63	73.98	-12.35
*	21120.00	Average	H	-	-	-113.24	44.28	-9.54	28.49	53.98	-25.49
*	21120.00	Peak	H	-	-	-101.64	44.28	-9.54	40.09	73.98	-33.89
	26400.00	Peak	H	-	-	-99.29	45.02	-9.54	43.19	68.20	-25.01

Table 7-32. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5320MHz
Channel: 64

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	10640.00	Average	H	-	-	-110.19	47.75	0.00	44.57	53.98	-9.41
*	10640.00	Peak	H	-	-	-98.29	47.75	0.00	56.47	73.98	-17.51
*	15960.00	Average	H	-	-	-111.20	55.02	0.00	50.82	53.98	-3.16
*	15960.00	Peak	H	-	-	-99.54	55.02	0.00	62.48	73.98	-11.50
*	21280.00	Average	H	-	-	-113.72	44.26	-9.54	28.00	53.98	-25.97
*	21280.00	Peak	H	-	-	-100.55	44.26	-9.54	41.17	73.98	-32.80
	26600.00	Peak	H	-	-	-101.85	47.61	-9.54	43.21	68.20	-24.99

Table 7-33. Radiated Measurements

© 2016 PCTEST Engineering Laboratory, Inc.

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5500MHz
Channel: 100

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11000.00	Average	H	-	-	-109.50	48.21	0.00	45.71	53.98	-8.27
*	11000.00	Peak	H	-	-	-97.89	48.21	0.00	57.32	73.98	-16.66
	16500.00	Peak	H	-	-	-98.88	55.07	0.00	63.19	68.20	-5.01
	22000.00	Peak	H	-	-	-100.49	44.50	-9.54	41.47	68.20	-26.73
	27500.00	Peak	H	-	-	-102.06	47.97	-9.54	43.37	68.20	-24.83

Table 7-34. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5600MHz
Channel: 120

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11200.00	Average	H	-	-	-110.30	48.06	0.00	44.76	53.98	-9.22
*	11200.00	Peak	H	-	-	-98.07	48.06	0.00	56.99	73.98	-16.99
	16800.00	Peak	H	-	-	-99.77	55.67	0.00	62.90	68.20	-5.30
*	22400.00	Average	H	-	-	-113.72	44.57	-9.54	28.31	53.98	-25.67
*	22400.00	Peak	H	-	-	-101.56	44.57	-9.54	40.47	73.98	-33.51
	28000.00	Peak	H	-	-	-102.62	48.11	-9.54	42.95	68.20	-25.25

Table 7-35. Radiated Measurements

© 2016 PCTEST Engineering Laboratory, Inc.

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5720MHz
Channel: 144

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11440.00	Average	H	-	-	-110.32	48.92	0.00	45.60	53.98	-8.38
*	11440.00	Peak	H	-	-	-98.25	48.92	0.00	57.67	73.98	-16.31
	17160.00	Peak	H	-	-	-97.71	54.87	0.00	64.16	68.20	-4.04
*	22880.00	Average	H	-	-	-113.71	44.61	-9.54	28.36	53.98	-25.62
*	22880.00	Peak	H	-	-	-100.97	44.61	-9.54	41.10	73.98	-32.88
	28600.00	Peak	H	-	-	-101.90	48.29	-9.54	43.85	68.20	-24.35

Table 7-36. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5745MHz
Channel: 149

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11490.00	Average	H	-	-	-110.21	49.06	0.00	45.85	53.98	-8.13
*	11490.00	Peak	H	-	-	-98.10	49.06	0.00	57.96	73.98	-16.02
	17235.00	Peak	H	-	-	-99.69	54.89	0.00	62.20	68.20	-6.00
*	22980.00	Average	H	-	-	-113.63	44.68	-9.54	28.51	53.98	-25.47
*	22980.00	Peak	H	-	-	-102.04	44.68	-9.54	40.10	73.98	-33.88
	28725.00	Peak	H	-	-	-102.31	48.26	-9.54	43.41	68.20	-24.79

Table 7-37. Radiated Measurements

© 2016 PCTEST Engineering Laboratory, Inc.

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5785MHz
Channel: 157

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11570.00	Average	H	-	-	-110.25	48.97	0.00	45.72	53.98	-8.26
*	11570.00	Peak	H	-	-	-98.24	48.97	0.00	57.73	73.98	-16.25
	17355.00	Peak	H	-	-	-98.48	55.38	0.00	63.90	68.20	-4.30
	23140.00	Peak	H	-	-	-100.80	44.75	-9.54	41.41	68.20	-26.79
	28925.00	Peak	H	-	-	-102.73	48.29	-9.54	43.02	68.20	-25.18

Table 7-38. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5825MHz
Channel: 165

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11650.00	Average	H	-	-	-110.34	48.92	0.00	45.58	53.98	-8.40
*	11650.00	Peak	H	-	-	-98.00	48.92	0.00	57.92	73.98	-16.06
	17475.00	Peak	H	-	-	-98.72	56.15	0.00	64.43	68.20	-3.77
	23300.00	Peak	H	-	-	-101.18	44.75	-9.54	41.03	68.20	-27.17
	29125.00	Peak	H	-	-	-101.80	48.28	-9.54	43.94	68.20	-24.26

Table 7-39. Radiated Measurements

© 2016 PCTEST Engineering Laboratory, Inc.

7.7.2 Antenna-2 Radiated Spurious Emission Measurements

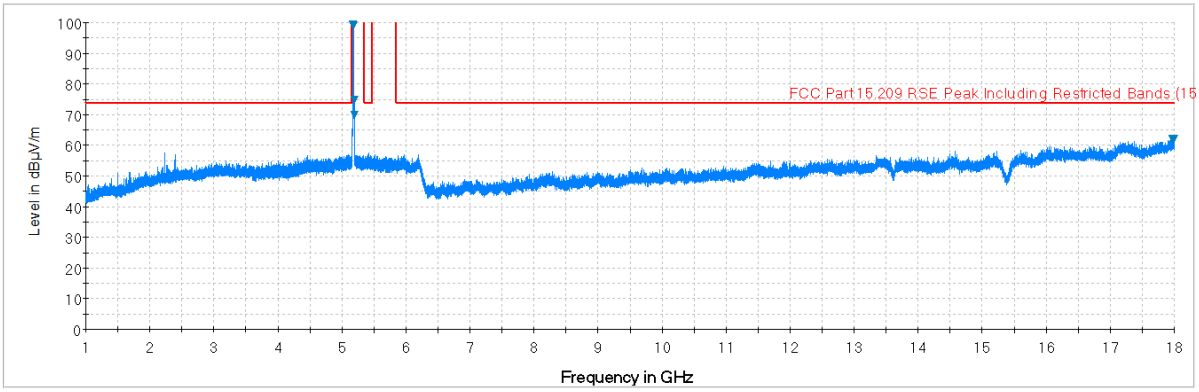

Plot 7-167. Radiated Spurious Plot above 1GHz (802.11a – U1 Ch. 40, Ant. Pol. H)

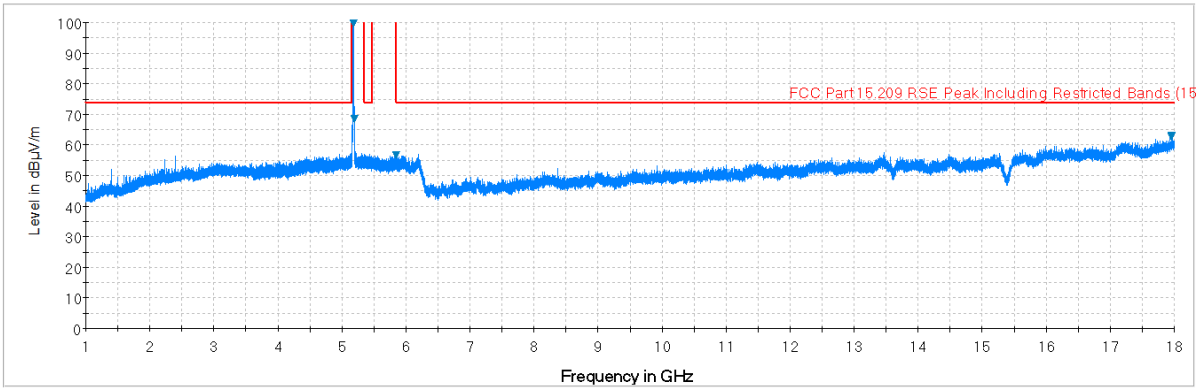

Plot 7-168. Radiated Spurious Plot above 1GHz (802.11a – U1 Ch. 40, Ant. Pol. V)

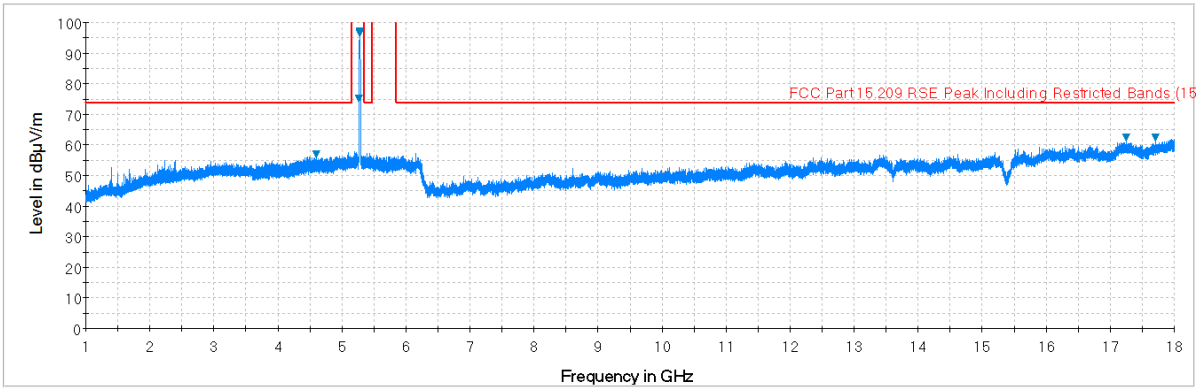

Plot 7-169. Radiated Spurious Plot above 1GHz (802.11a – U2A Ch. 56, Ant. Pol. H)

© 2016 PCTEST Engineering Laboratory, Inc.

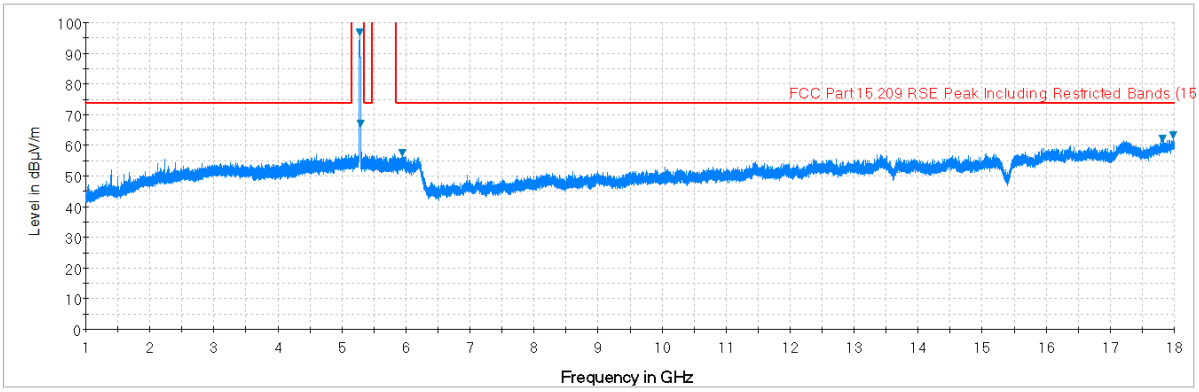

Plot 7-170. Radiated Spurious Plot above 1GHz (802.11a – U2A Ch. 56, Ant. Pol. V)

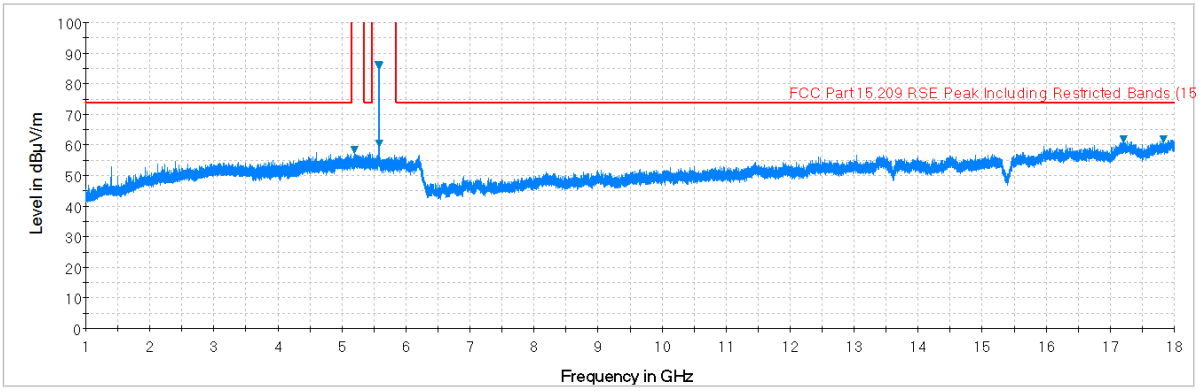

Plot 7-171. Radiated Spurious Plot above 1GHz (802.11a – U2C Ch. 116, Ant. Pol. H)

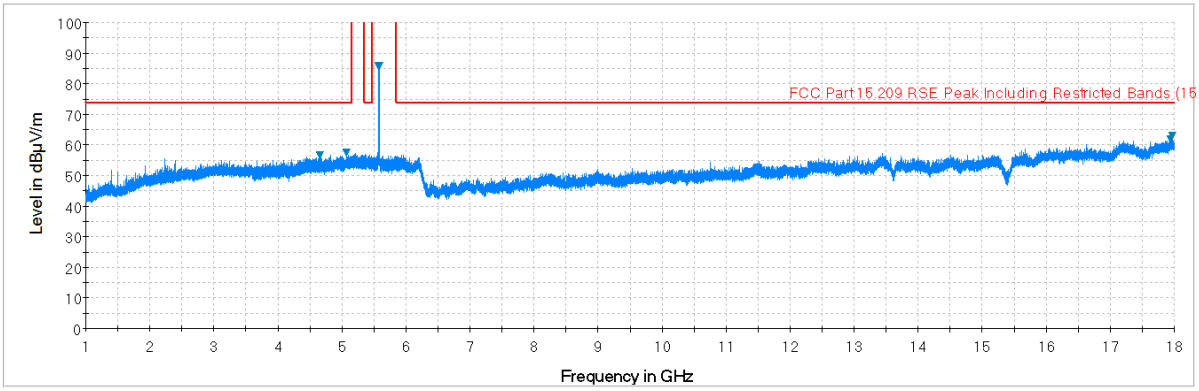

Plot 7-172. Radiated Spurious Plot above 1GHz (802.11a – U2C Ch. 116, Ant. Pol. V)

© 2016 PCTEST Engineering Laboratory, Inc.

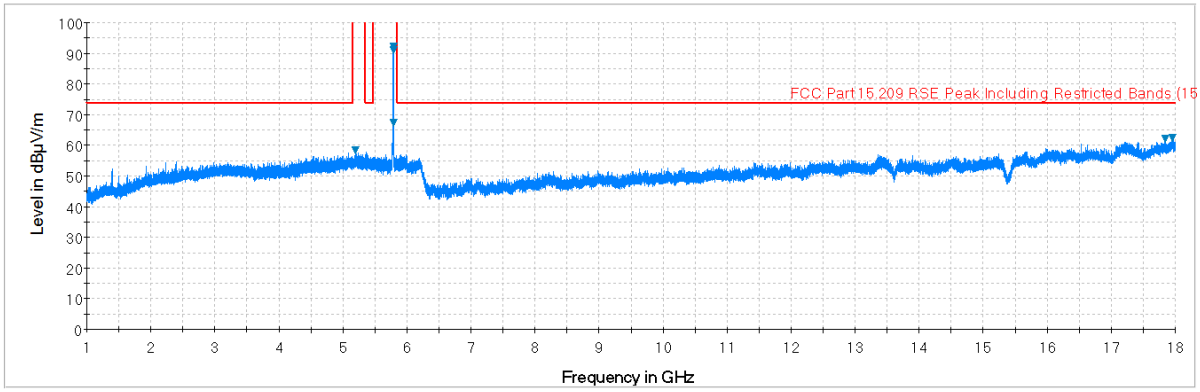

Plot 7-173. Radiated Spurious Plot above 1GHz (802.11a – U3 Ch. 157, Ant. Pol. H)

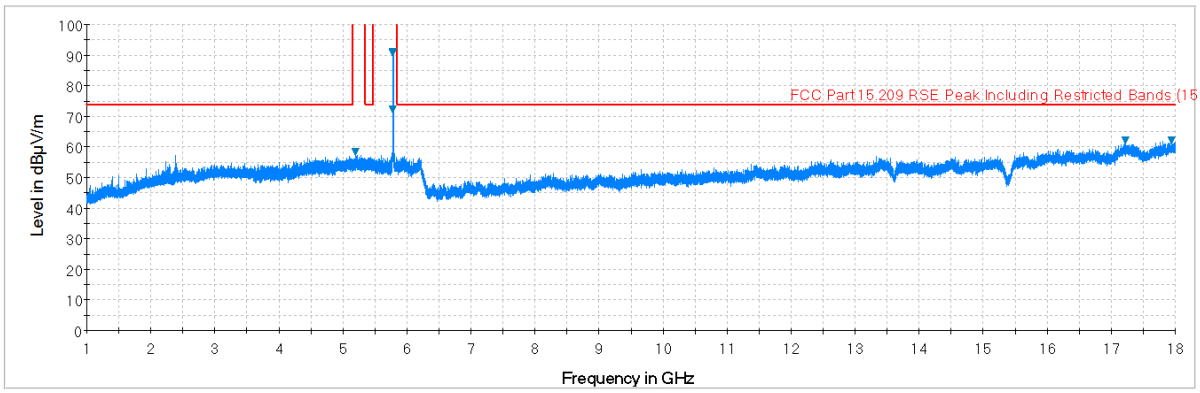

Plot 7-174. Radiated Spurious Plot above 1GHz (802.11a – U3 Ch. 157, Ant. Pol. V)

© 2016 PCTEST Engineering Laboratory, Inc.

Antenna-2 Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209

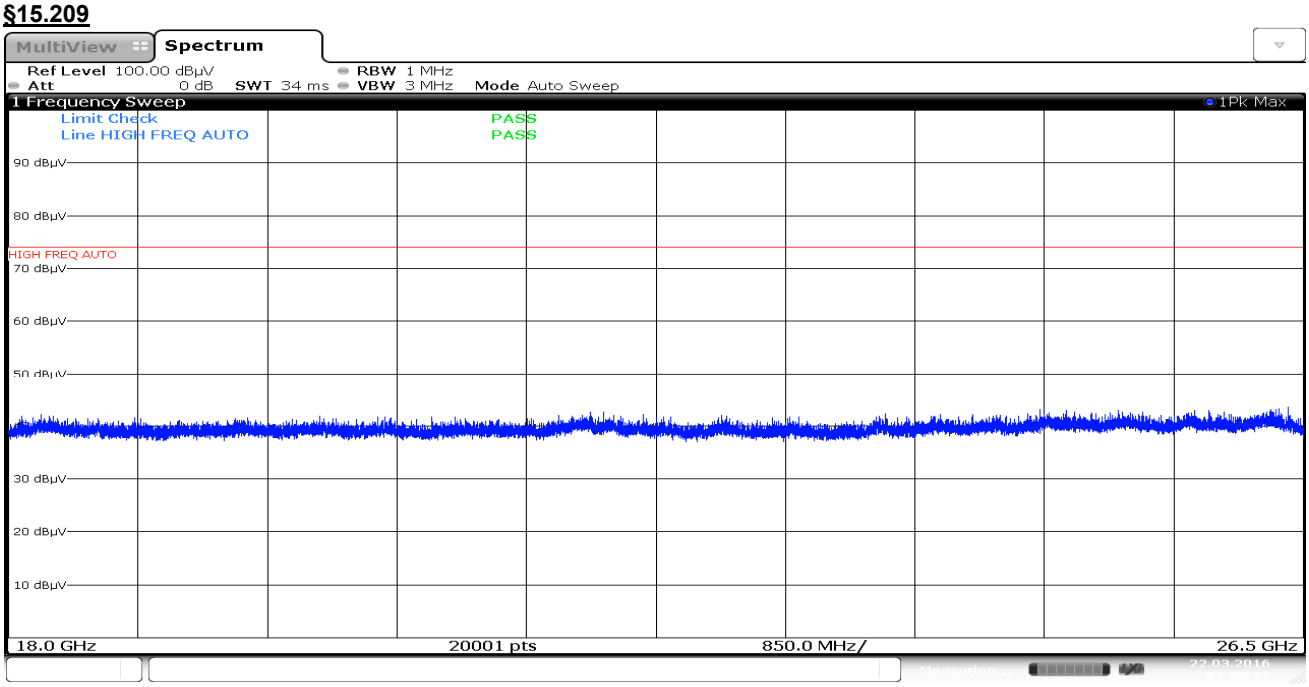

Date: 22.MAR.2016 04:08:52

Plot 7-175. Radiated Spurious Plot above 18GHz (802.11a – Ant. Pol. H)

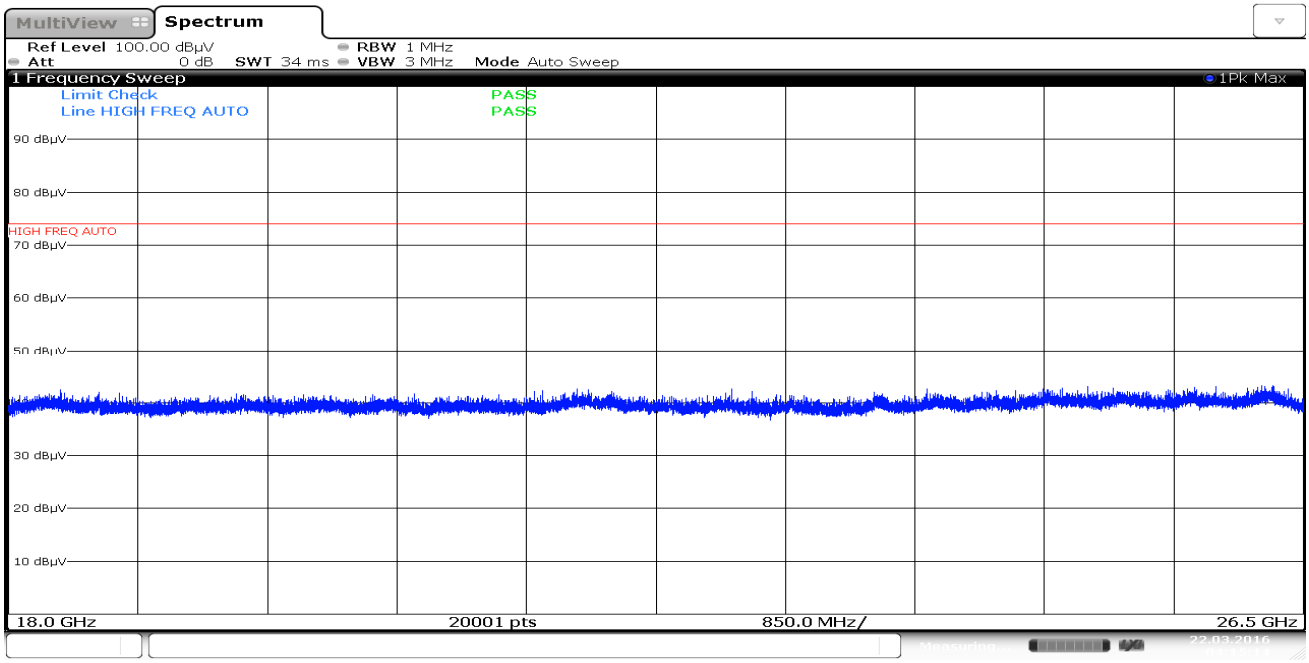

Date: 22.MAR.2016 04:15:14

Plot 7-176. Radiated Spurious Plot above 18GHz (802.11a – Ant. Pol. V)

© 2016 PCTEST Engineering Laboratory, Inc.

Antenna-2 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5180MHz
Channel: 36

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
	10360.00	Peak	H	-	-	-98.21	47.23	0.00	56.01	68.20	-12.19
*	15540.00	Average	H	-	-	-111.89	54.98	0.00	50.09	53.98	-3.89
*	15540.00	Peak	H	-	-	-100.53	54.98	0.00	61.45	73.98	-12.53
*	20720.00	Average	H	-	-	-113.86	44.39	-9.54	27.98	53.98	-26.00
*	20720.00	Peak	H	-	-	-101.83	44.39	-9.54	40.01	73.98	-33.97
	25900.00	Peak	H	-	-	-99.93	45.11	-9.54	42.64	68.20	-25.56

Table 7-40. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5200MHz
Channel: 40

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
	10400.00	Peak	H	-	-	-97.30	47.44	0.00	57.14	68.20	-11.06
*	15600.00	Average	H	-	-	-111.65	55.19	0.00	50.55	53.98	-3.43
*	15600.00	Peak	H	-	-	-100.05	55.19	0.00	62.15	73.98	-11.83
*	20800.00	Average	H	-	-	-113.41	44.39	-9.54	28.44	53.98	-25.54
*	20800.00	Peak	H	-	-	-101.60	44.39	-9.54	40.25	73.98	-33.73
	26000.00	Peak	H	-	-	-99.89	45.12	-9.54	42.68	68.20	-25.52

Table 7-41. Radiated Measurements

© 2016 PCTEST Engineering Laboratory, Inc.

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5240MHz
Channel: 48

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
	10480.00	Peak	H	-	-	-99.40	47.79	0.00	55.39	68.20	-12.81
*	15720.00	Average	H	-	-	-110.47	54.46	0.00	50.99	53.98	-2.99
*	15720.00	Peak	H	-	-	-98.54	54.46	0.00	62.92	73.98	-11.06
*	20960.00	Average	H	-	-	-113.21	44.31	-9.54	28.56	53.98	-25.42
*	20960.00	Peak	H	-	-	-100.48	44.31	-9.54	41.29	73.98	-32.69
	26200.00	Peak	H	-	-	-99.38	45.01	-9.54	43.09	68.20	-25.11

Table 7-42. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5260MHz
Channel: 52

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
	10520.00	Peak	H	-	-	-99.02	47.85	0.00	55.83	68.20	-12.37
*	15780.00	Average	H	-	-	-111.53	54.20	0.00	49.67	53.98	-4.31
*	15780.00	Peak	H	-	-	-99.66	54.20	0.00	61.54	73.98	-12.44
*	21040.00	Average	H	-	-	-113.17	44.29	-9.54	28.58	53.98	-25.40
*	21040.00	Peak	H	-	-	-99.82	44.29	-9.54	41.93	73.98	-32.05
	26300.00	Peak	H	-	-	-98.94	45.00	-9.54	43.51	68.20	-24.69

Table 7-43. Radiated Measurements

© 2016 PCTEST Engineering Laboratory, Inc.

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5280MHz
Channel: 56

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
	10560.00	Peak	H	-	-	-99.22	47.79	0.00	55.57	68.20	-12.63
*	15840.00	Average	H	-	-	-111.19	54.40	0.00	50.21	53.98	-3.77
*	15840.00	Peak	H	-	-	-99.94	54.40	0.00	61.46	73.98	-12.52
*	21120.00	Average	H	-	-	-113.25	44.28	-9.54	28.48	53.98	-25.50
*	21120.00	Peak	H	-	-	-100.99	44.28	-9.54	40.74	73.98	-33.24
	26400.00	Peak	H	-	-	-99.15	45.02	-9.54	43.33	68.20	-24.87

Table 7-44. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5320MHz
Channel: 64

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	10640.00	Average	H	-	-	-110.18	47.75	0.00	44.58	53.98	-9.40
*	10640.00	Peak	H	-	-	-98.13	47.75	0.00	56.63	73.98	-17.35
*	15960.00	Average	H	-	-	-111.23	55.02	0.00	50.79	53.98	-3.19
*	15960.00	Peak	H	-	-	-100.02	55.02	0.00	62.00	73.98	-11.98
*	21280.00	Average	H	-	-	-113.24	44.26	-9.54	28.48	53.98	-25.49
*	21280.00	Peak	H	-	-	-100.89	44.26	-9.54	40.83	73.98	-33.14
	26600.00	Peak	H	-	-	-102.09	47.61	-9.54	42.97	68.20	-25.23

Table 7-45. Radiated Measurements

© 2016 PCTEST Engineering Laboratory, Inc.

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5500MHz
Channel: 100

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11000.00	Average	H	-	-	-109.46	48.21	0.00	45.75	53.98	-8.23
*	11000.00	Peak	H	-	-	-97.74	48.21	0.00	57.47	73.98	-16.51
	16500.00	Peak	H	-	-	-98.81	55.07	0.00	63.26	68.20	-4.94
	22000.00	Peak	H	-	-	-100.53	44.50	-9.54	41.43	68.20	-26.77
	27500.00	Peak	H	-	-	-102.09	47.97	-9.54	43.34	68.20	-24.86

Table 7-46. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5600MHz
Channel: 120

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11200.00	Average	H	-	-	-110.18	48.06	0.00	44.88	53.98	-9.10
*	11200.00	Peak	H	-	-	-98.47	48.06	0.00	56.59	73.98	-17.39
	16800.00	Peak	H	-	-	-99.22	55.67	0.00	63.45	68.20	-4.75
*	22400.00	Average	H	-	-	-113.31	44.57	-9.54	28.72	53.98	-25.26
*	22400.00	Peak	H	-	-	-101.25	44.57	-9.54	40.78	73.98	-33.20
	28000.00	Peak	H	-	-	-102.71	48.11	-9.54	42.86	68.20	-25.34

Table 7-47. Radiated Measurements

© 2016 PCTEST Engineering Laboratory, Inc.

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5720MHz
Channel: 144

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11440.00	Average	H	-	-	-110.31	48.92	0.00	45.61	53.98	-8.37
*	11440.00	Peak	H	-	-	-98.15	48.92	0.00	57.77	73.98	-16.21
	17160.00	Peak	H	-	-	-96.91	54.87	0.00	64.96	68.20	-3.24
*	22880.00	Average	H	-	-	-113.34	44.61	-9.54	28.73	53.98	-25.25
*	22880.00	Peak	H	-	-	-101.54	44.61	-9.54	40.53	73.98	-33.45
	28600.00	Peak	H	-	-	-101.86	48.29	-9.54	43.89	68.20	-24.31

Table 7-48. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5745MHz
Channel: 149

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11490.00	Average	H	-	-	-110.18	49.06	0.00	45.88	53.98	-8.10
*	11490.00	Peak	H	-	-	-97.80	49.06	0.00	58.26	73.98	-15.72
	17235.00	Peak	H	-	-	-98.81	54.89	0.00	63.08	68.20	-5.12
*	22980.00	Average	H	-	-	-114.19	44.68	-9.54	27.95	53.98	-26.03
*	22980.00	Peak	H	-	-	-100.97	44.68	-9.54	41.17	73.98	-32.81
	28725.00	Peak	H	-	-	-102.47	48.26	-9.54	43.25	68.20	-24.95

Table 7-49. Radiated Measurements

© 2016 PCTEST Engineering Laboratory, Inc.

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5785MHz
Channel: 157

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11570.00	Average	H	-	-	-110.22	48.97	0.00	45.75	53.98	-8.23
*	11570.00	Peak	H	-	-	-98.46	48.97	0.00	57.51	73.98	-16.47
	17355.00	Peak	H	-	-	-98.39	55.38	0.00	63.99	68.20	-4.21
	23140.00	Peak	H	-	-	-100.19	44.75	-9.54	42.02	68.20	-26.18
	28925.00	Peak	H	-	-	-102.68	48.29	-9.54	43.07	68.20	-25.13

Table 7-50. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5825MHz
Channel: 165

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
*	11650.00	Average	H	-	-	-110.30	48.92	0.00	45.62	53.98	-8.36
*	11650.00	Peak	H	-	-	-98.48	48.92	0.00	57.44	73.98	-16.54
	17475.00	Peak	H	-	-	-99.25	56.15	0.00	63.90	68.20	-4.30
	23300.00	Peak	H	-	-	-100.52	44.75	-9.54	41.69	68.20	-26.51
	29125.00	Peak	H	-	-	-101.13	48.28	-9.54	44.61	68.20	-23.59

Table 7-51. Radiated Measurements

© 2016 PCTEST Engineering Laboratory, Inc.

7.7.3 Antenna-1 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11a
Worst Case Transfer Rate:	6 Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	5180MHz
Channel:	36

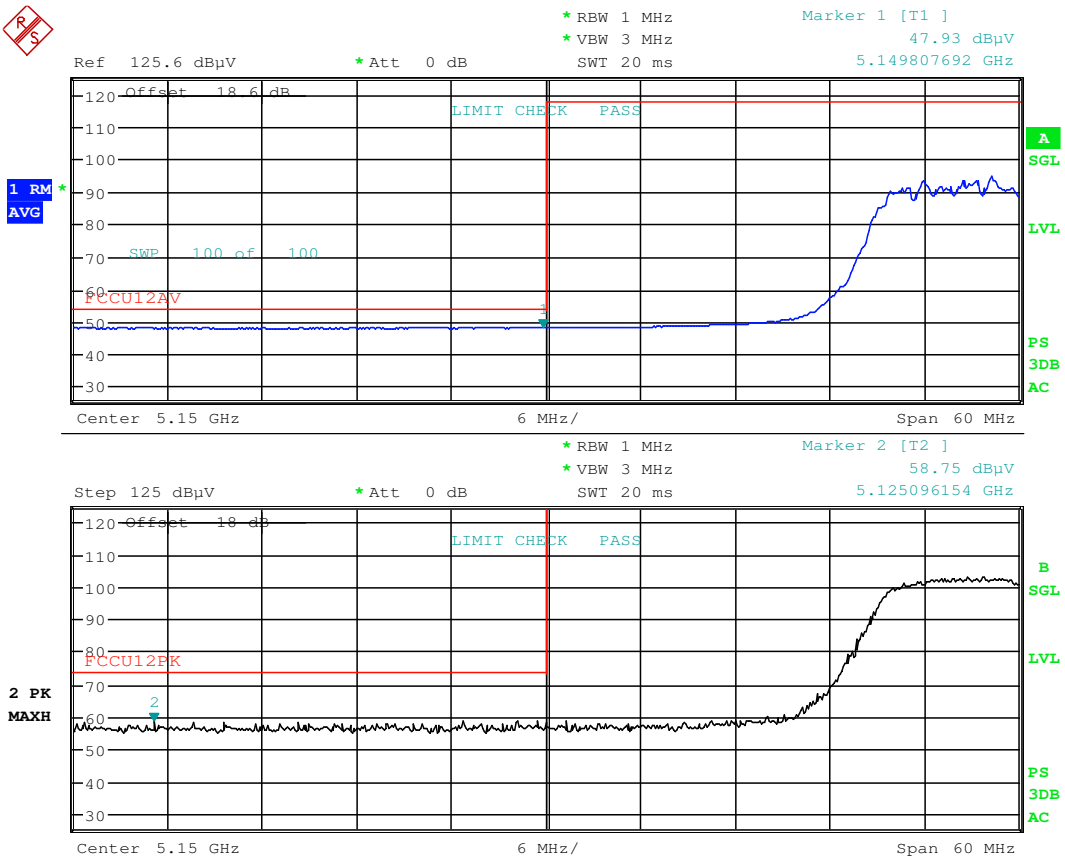

Date: 20.MAR.2016 22:04:05

Plot 7-177. Radiated Restricted Lower Band Edge Plot (UNII Band 1)

© 2016 PCTEST Engineering Laboratory, Inc.

Antenna-1 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11a
Worst Case Transfer Rate:	6 Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	5320MHz
Channel:	64

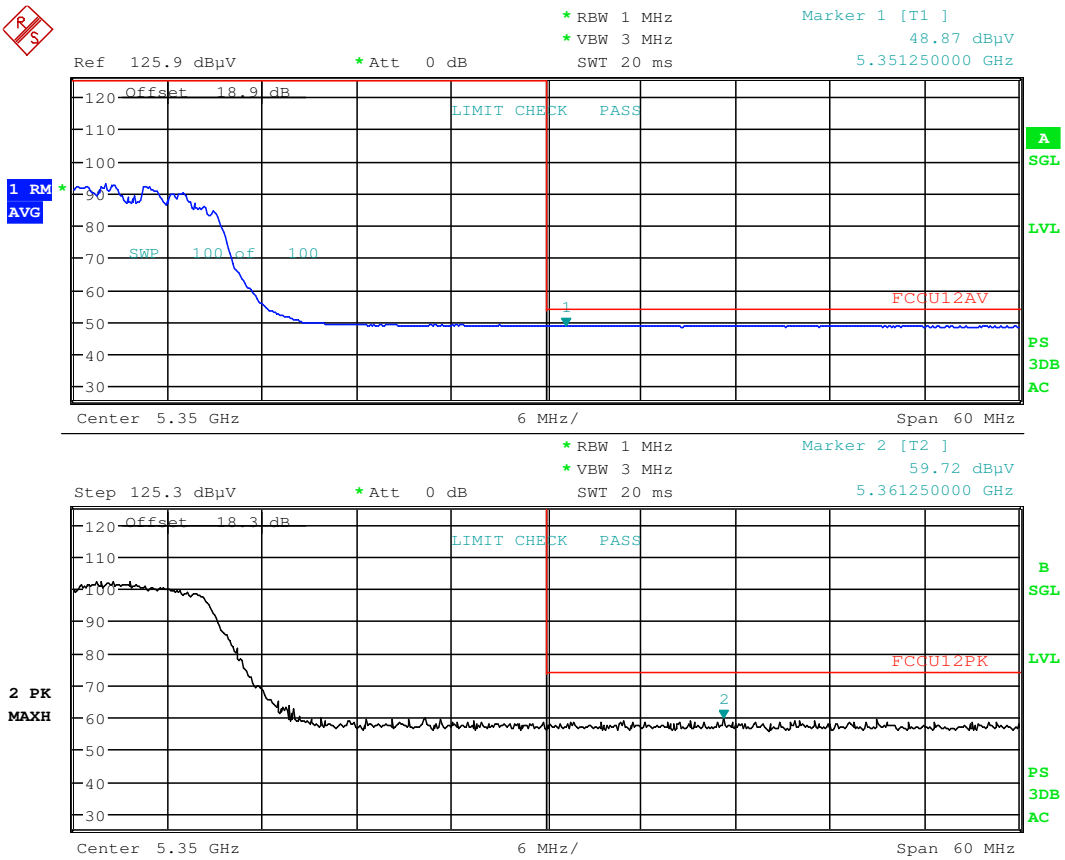

Date: 20.MAR.2016 22:19:45

Plot 7-178. Radiated Restricted Upper Band Edge Plot (UNII Band 2A)

© 2016 PCTEST Engineering Laboratory, Inc.

Antenna-1 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11a
Worst Case Transfer Rate:	6 Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	5500MHz
Channel:	100

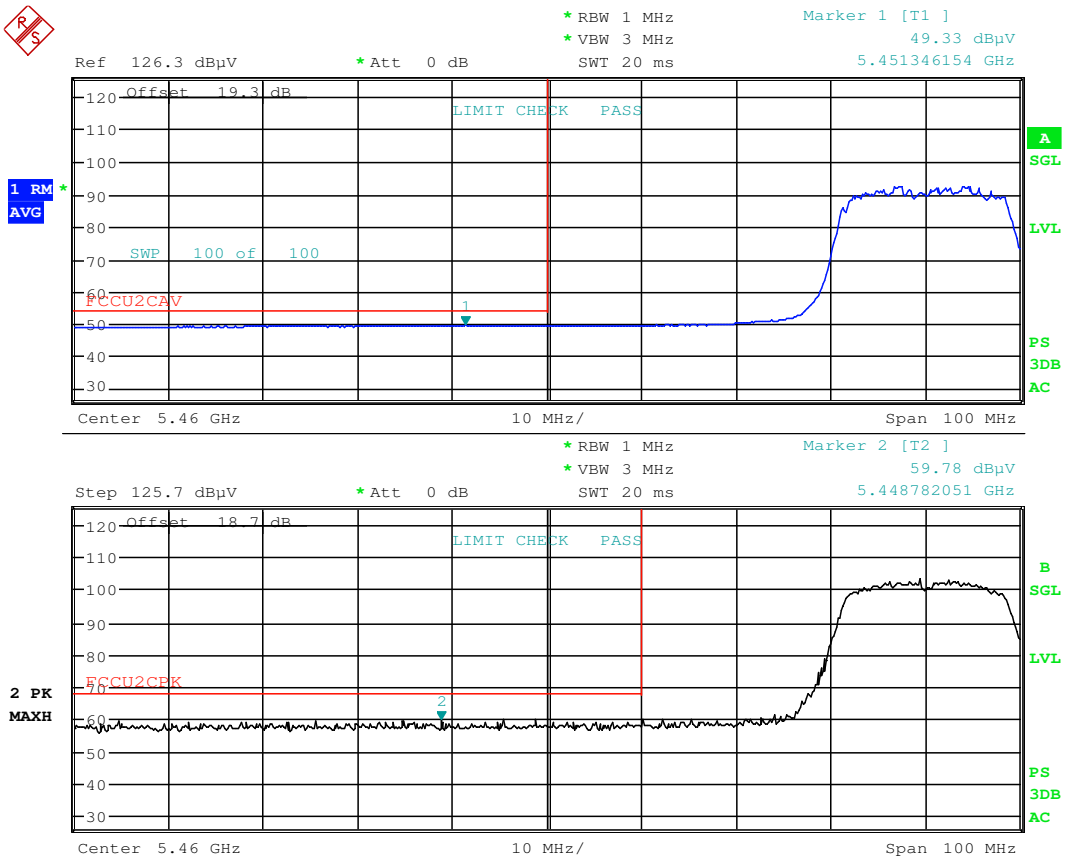

Date: 20.MAR.2016 22:27:25

Plot 7-179. Radiated Restricted Lower Band Edge Plot (UNII Band 2C)

© 2016 PCTEST Engineering Laboratory, Inc.

Antenna-1 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11a
Worst Case Transfer Rate:	6 Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	5825MHz
Channel:	165

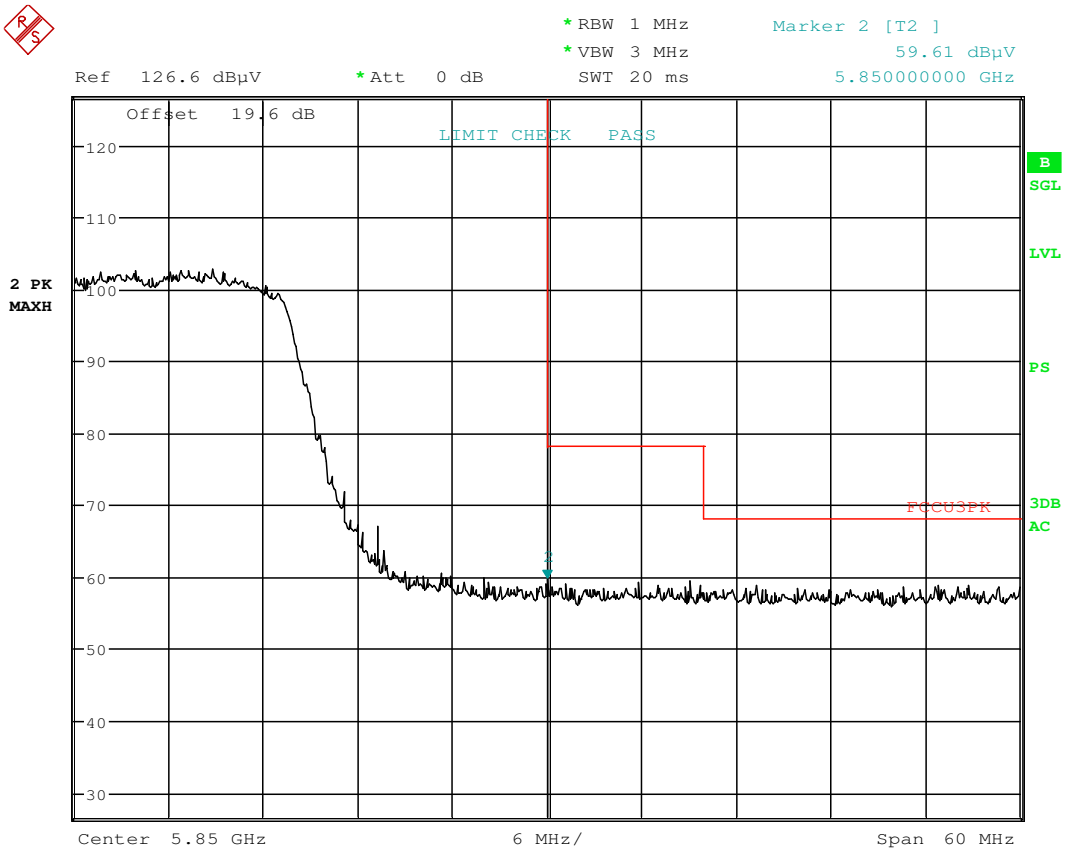

Date: 20.MAR.2016 22:32:48

Plot 7-180. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

© 2016 PCTEST Engineering Laboratory, Inc.

7.7.4 Antenna-1 Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11n (40MHz)
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5190MHz
Channel:	38

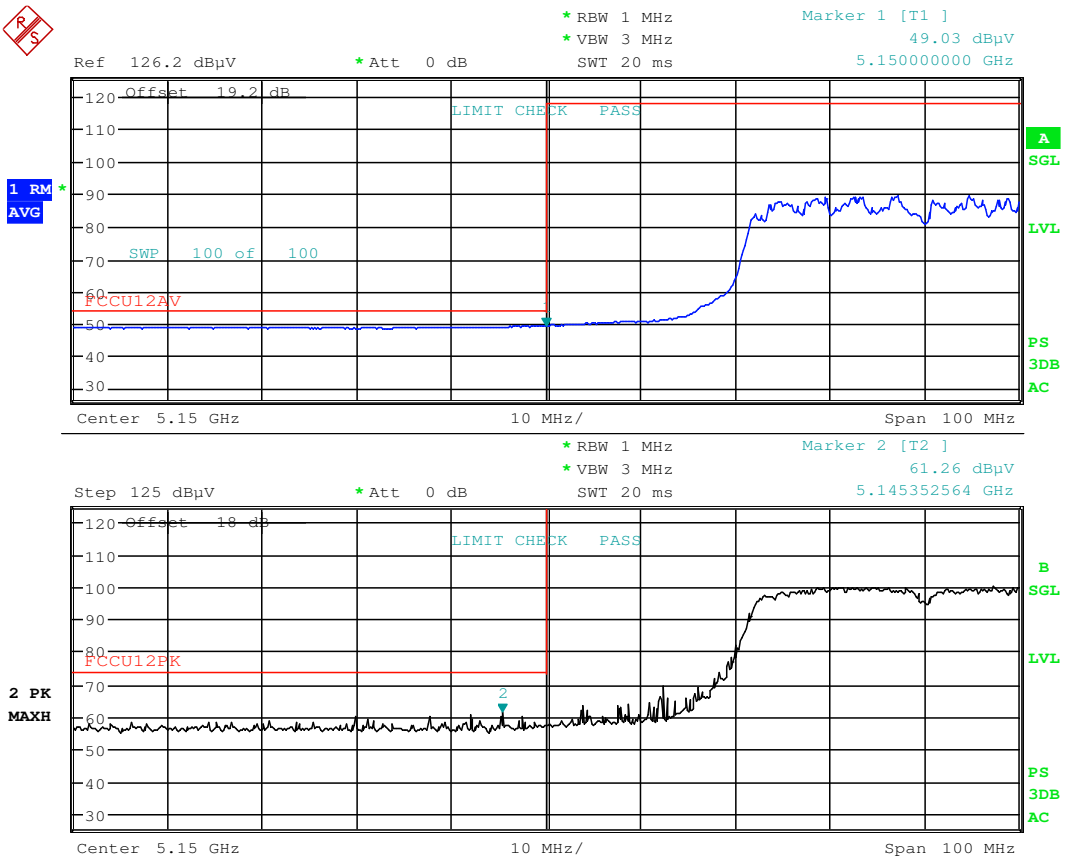

Date: 20.MAR.2016 22:05:51

Plot 7-181. Radiated Restricted Lower Band Edge Plot (UNII Band 1)

© 2016 PCTEST Engineering Laboratory, Inc.

Antenna-1 Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11n (40MHz)
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5310MHz
Channel:	62

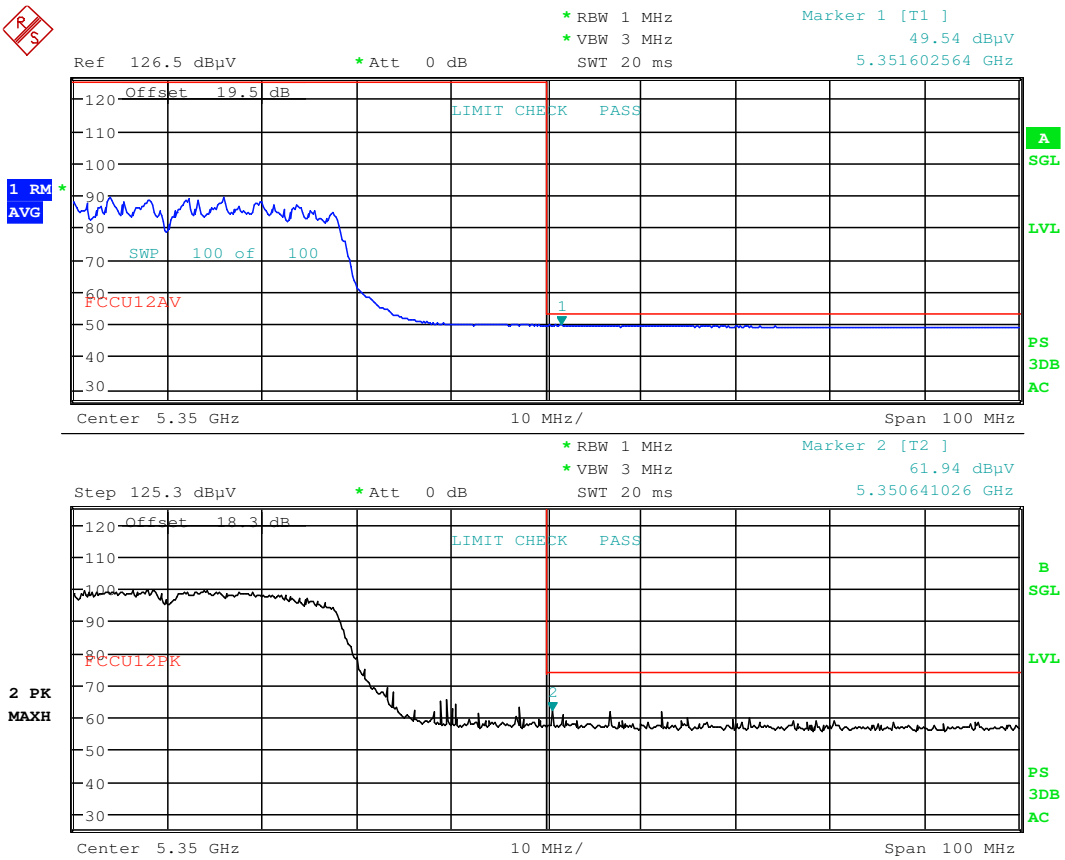

Date: 20.MAR.2016 22:20:31

Plot 7-182. Radiated Restricted Upper Band Edge Plot (UNII Band 2A)

© 2016 PCTEST Engineering Laboratory, Inc.

Antenna-1 Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11n (40MHz)
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5510MHz
Channel:	102

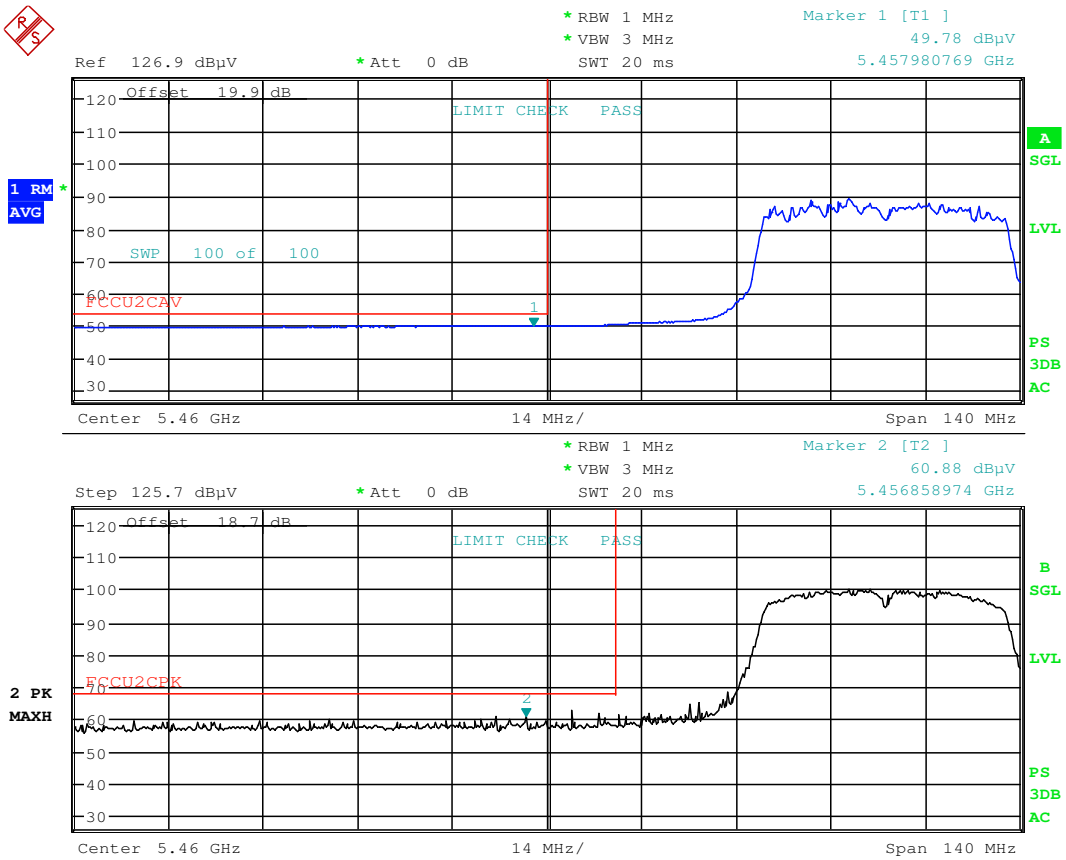

Date: 20.MAR.2016 22:28:25

Plot 7-183. Radiated Restricted Lower Band Edge Plot (UNII Band 2C)

© 2016 PCTEST Engineering Laboratory, Inc.

Antenna-1 Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11n (40MHz)
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5795MHz
Channel:	159

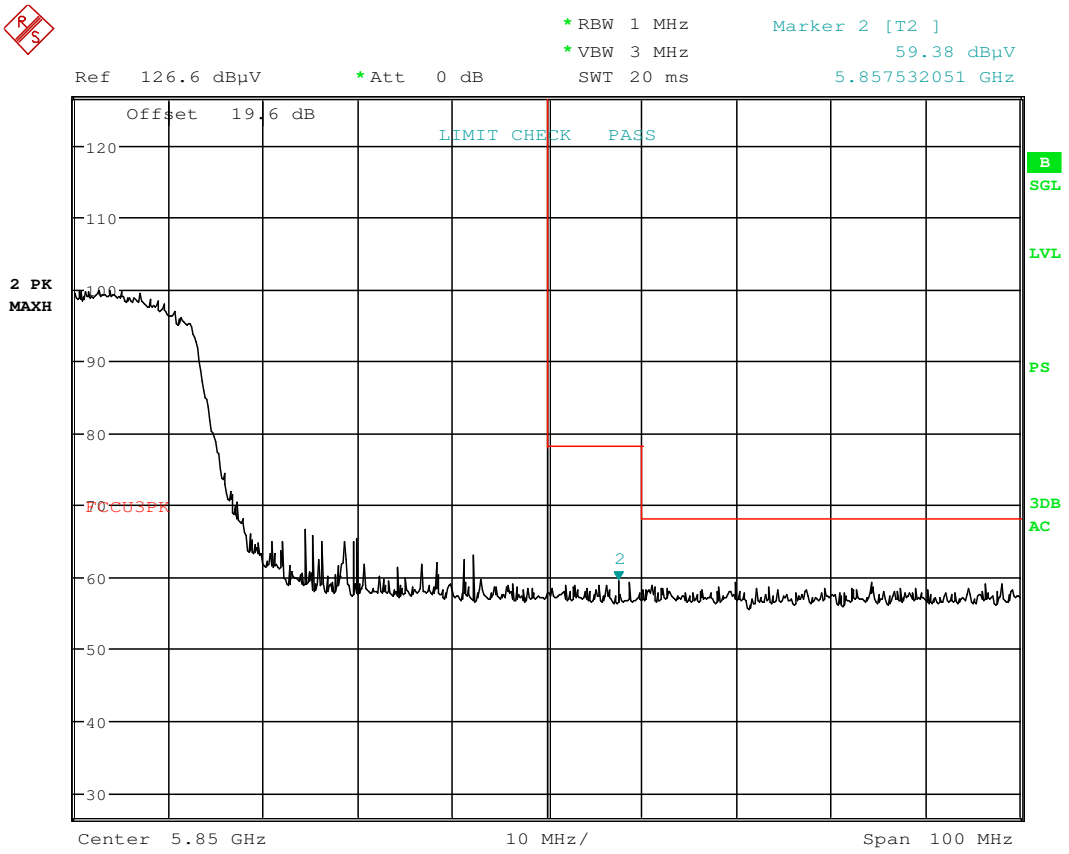

Date: 20.MAR.2016 22:34:49

Plot 7-184. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

© 2016 PCTEST Engineering Laboratory, Inc.

7.7.5 Antenna-1 Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11ac (80MHz)
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5210MHz
Channel:	42

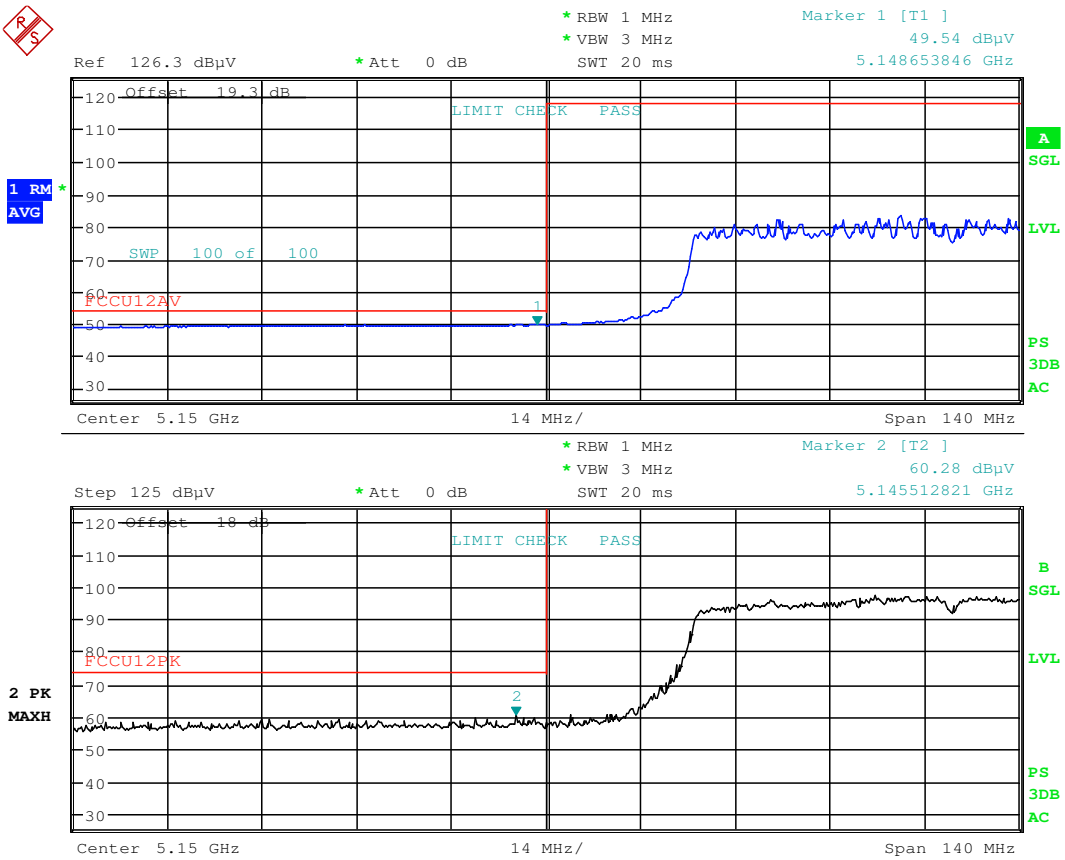

Date: 20.MAR.2016 22:09:30

Plot 7-185. Radiated Restricted Lower Band Edge Plot (UNII Band 1)

© 2016 PCTEST Engineering Laboratory, Inc.

Antenna-1 Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11ac (80MHz)
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5290MHz
Channel:	58

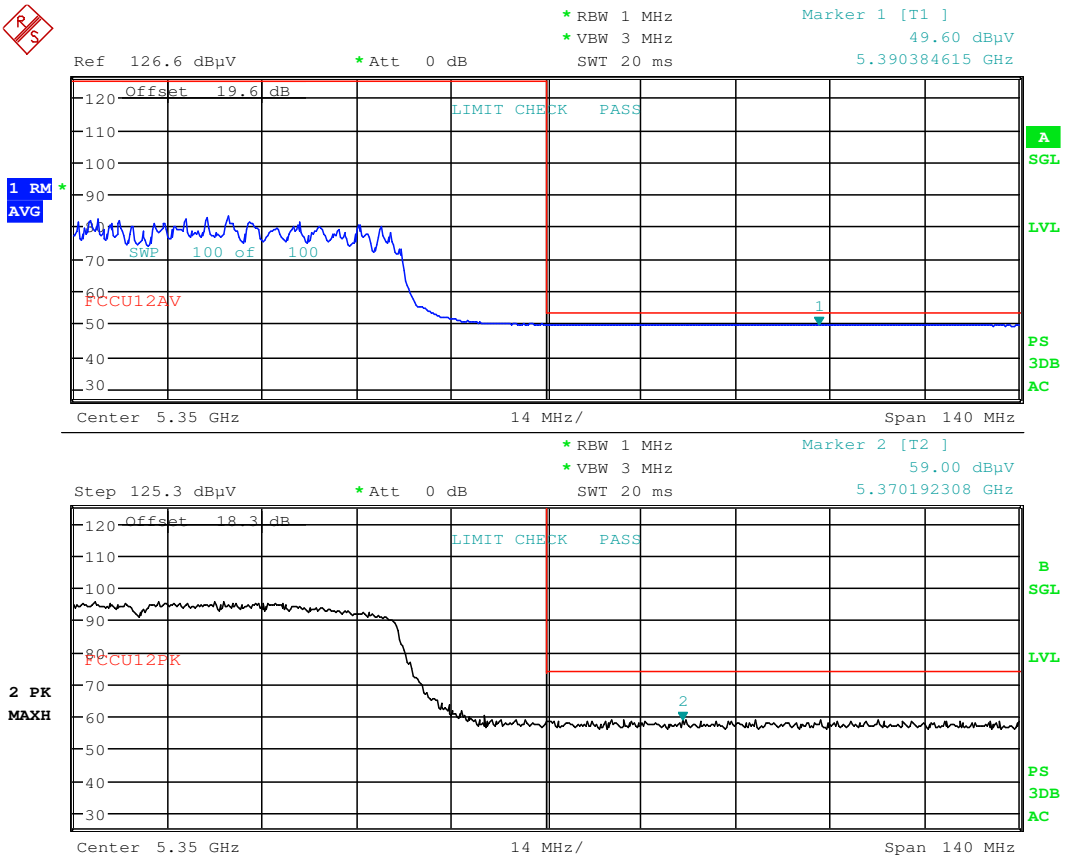

Date: 20.MAR.2016 22:21:25

Plot 7-186. Radiated Restricted Upper Band Edge Plot (UNII Band 2A)

© 2016 PCTEST Engineering Laboratory, Inc.

Antenna-1 Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11ac (80MHz)
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5530MHz
Channel:	106

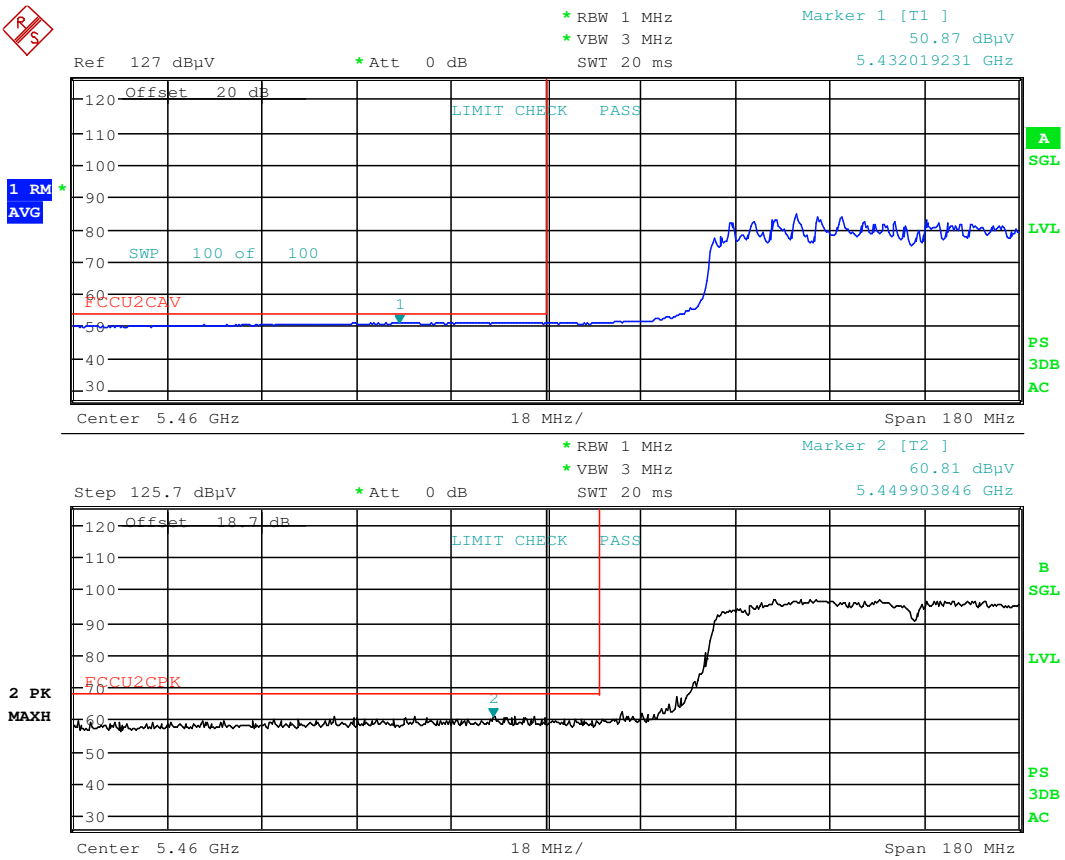

Date: 20.MAR.2016 22:29:10

Plot 7-187. Radiated Restricted Lower Band Edge Plot (UNII Band 2C)

© 2016 PCTEST Engineering Laboratory, Inc.

Antenna-1 Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11ac (80MHz)
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5775MHz
Channel:	155

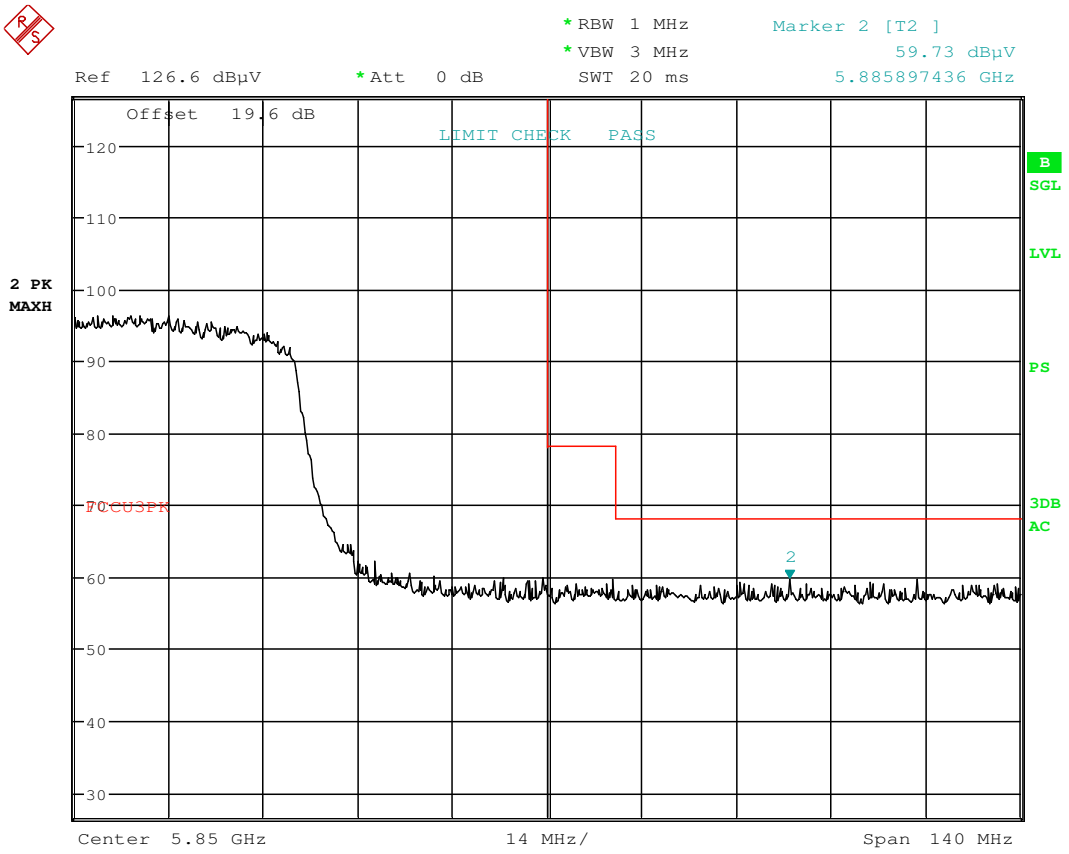

Date: 20.MAR.2016 22:35:31

Plot 7-188. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

© 2016 PCTEST Engineering Laboratory, Inc.

7.7.6 Antenna-2 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11a
Worst Case Transfer Rate:	6 Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	5180MHz
Channel:	36

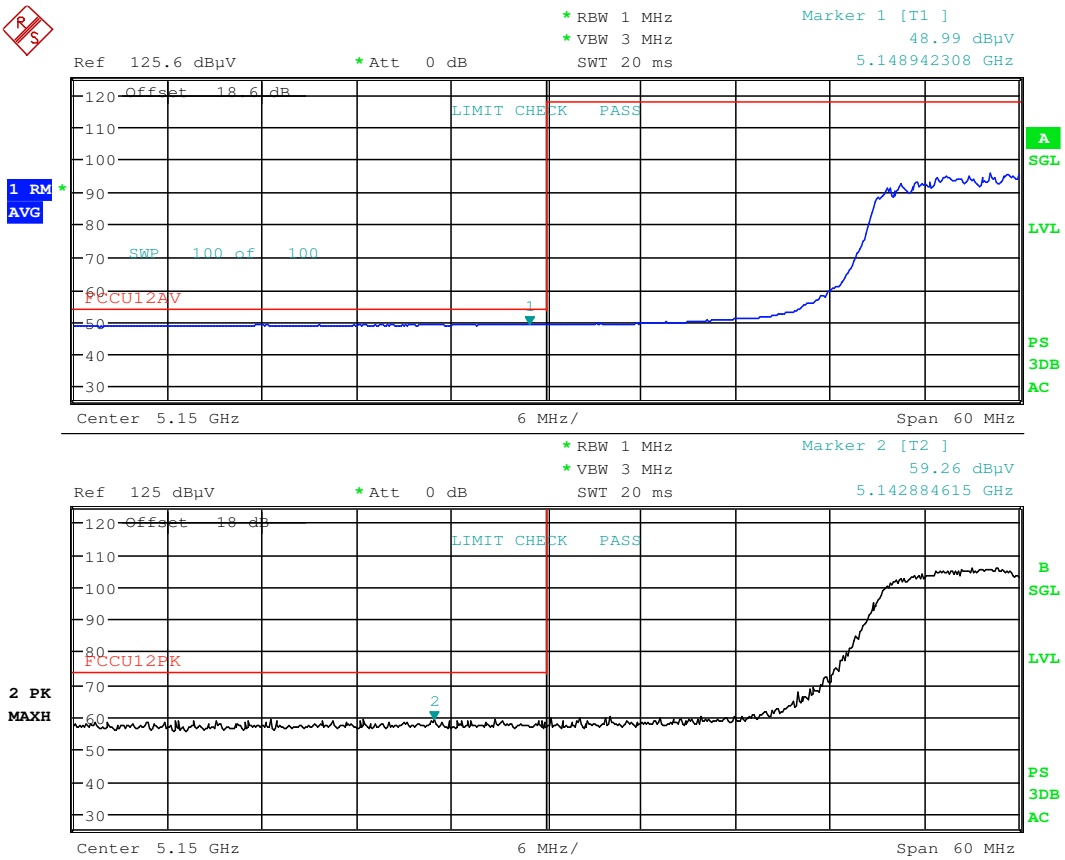

Date: 20.MAR.2016 23:15:52

Plot 7-189. Radiated Restricted Lower Band Edge Plot (UNII Band 1)

© 2016 PCTEST Engineering Laboratory, Inc.

Antenna-2 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11a
Worst Case Transfer Rate:	6 Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	5320MHz
Channel:	64

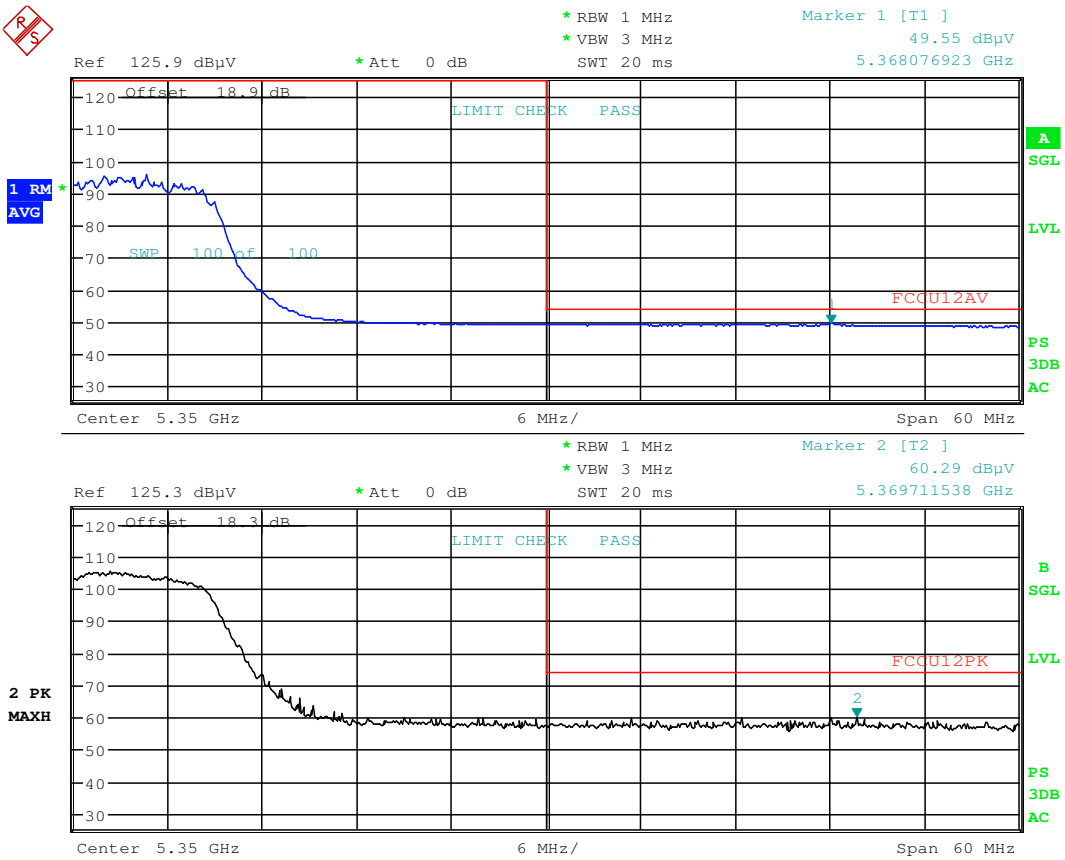

Date: 20.MAR.2016 23:35:45

Plot 7-190. Radiated Restricted Upper Band Edge Plot (UNII Band 2A)

© 2016 PCTEST Engineering Laboratory, Inc.

Antenna-2 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11a
Worst Case Transfer Rate:	6 Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	5500MHz
Channel:	100

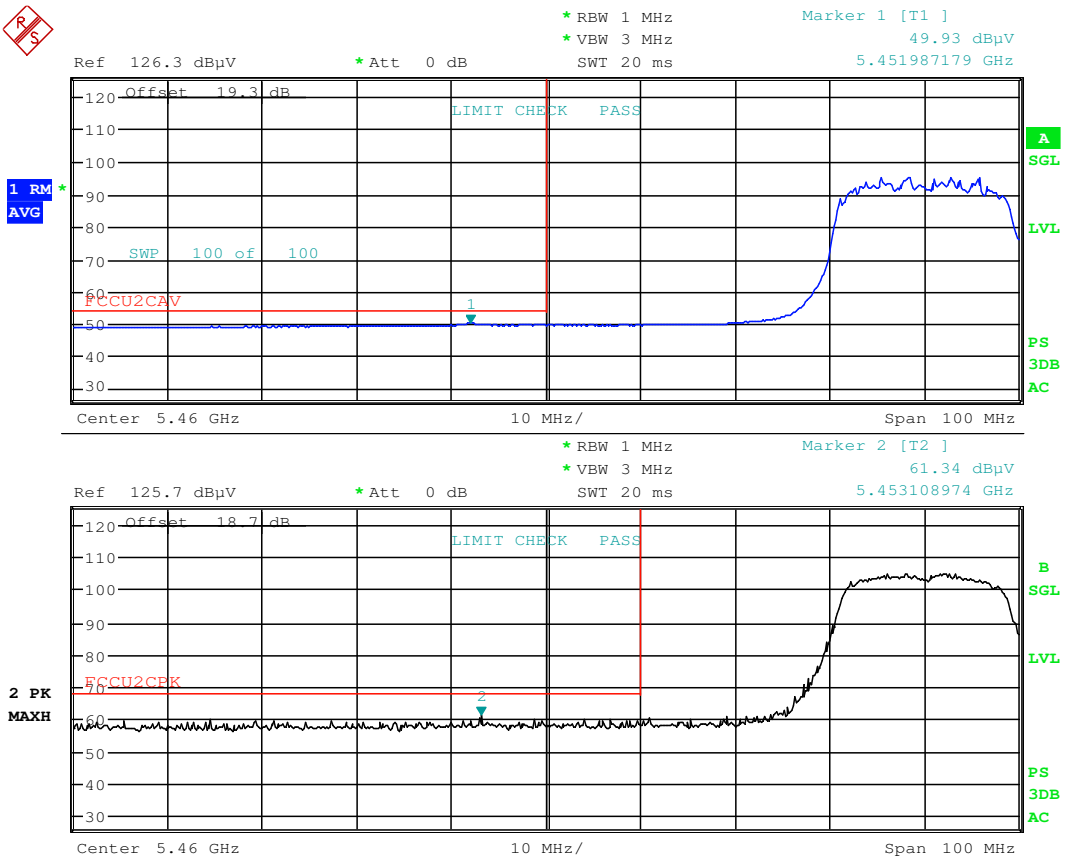

Date: 20.MAR.2016 23:43:28

Plot 7-191. Radiated Restricted Lower Band Edge Plot (UNII Band 2C)

© 2016 PCTEST Engineering Laboratory, Inc.

Antenna-2 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11a
Worst Case Transfer Rate:	6 Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	5825MHz
Channel:	165

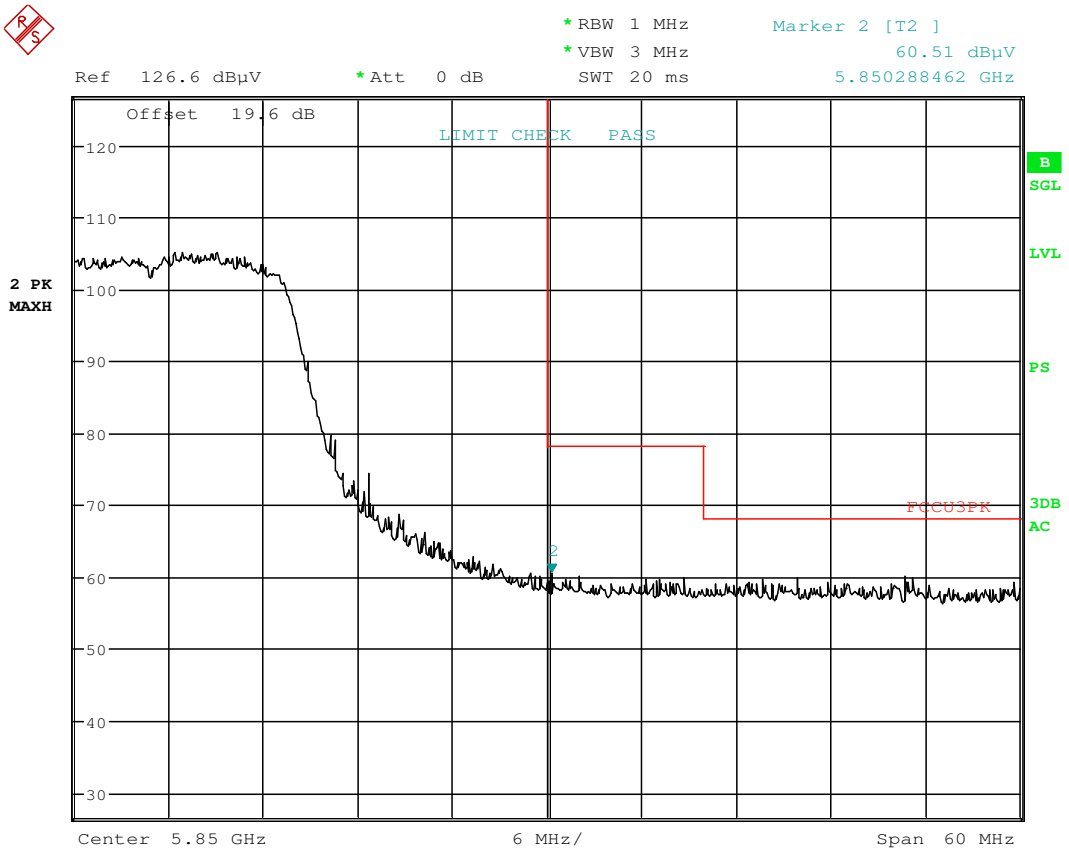

Date: 20.MAR.2016 23:53:20

Plot 7-192. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

© 2016 PCTEST Engineering Laboratory, Inc.

7.7.7 Antenna-2 Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11n (40MHz)
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5190MHz
Channel:	38

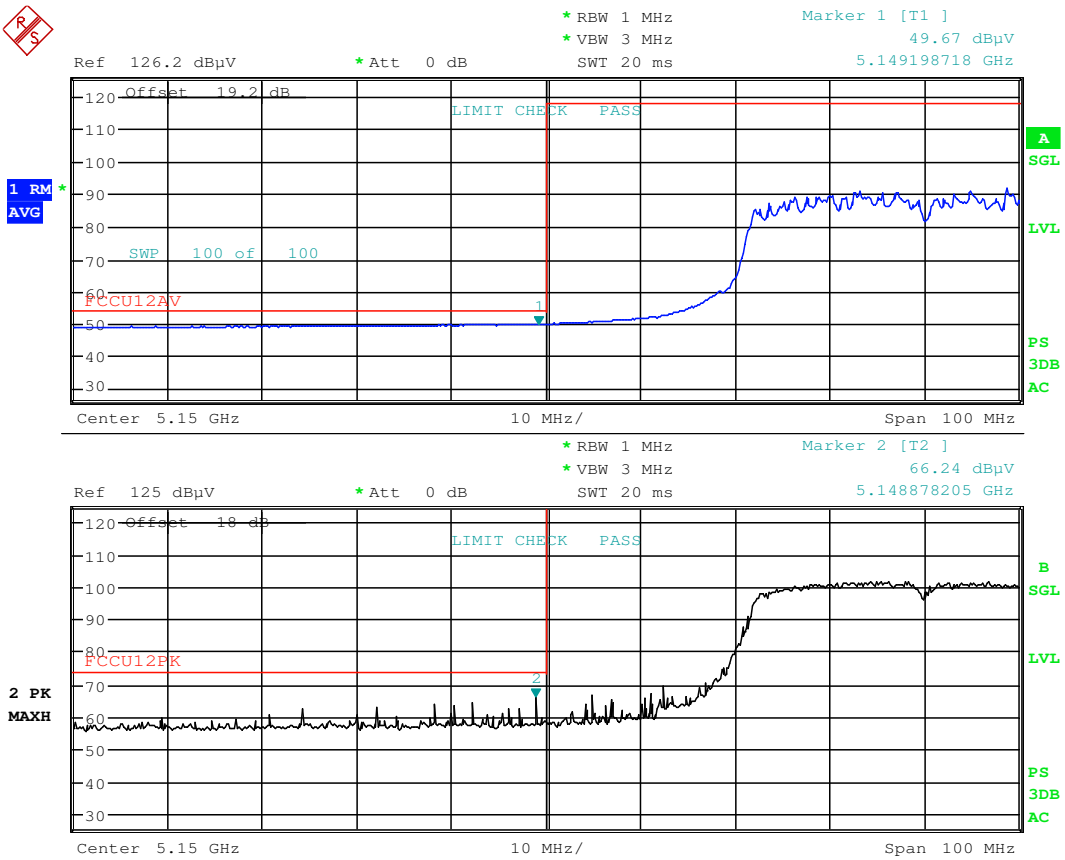

Date: 20.MAR.2016 23:30:46

Plot 7-193. Radiated Restricted Lower Band Edge Plot (UNII Band 1)

© 2016 PCTEST Engineering Laboratory, Inc.

Antenna-2 Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11n (40MHz)
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5310MHz
Channel:	62

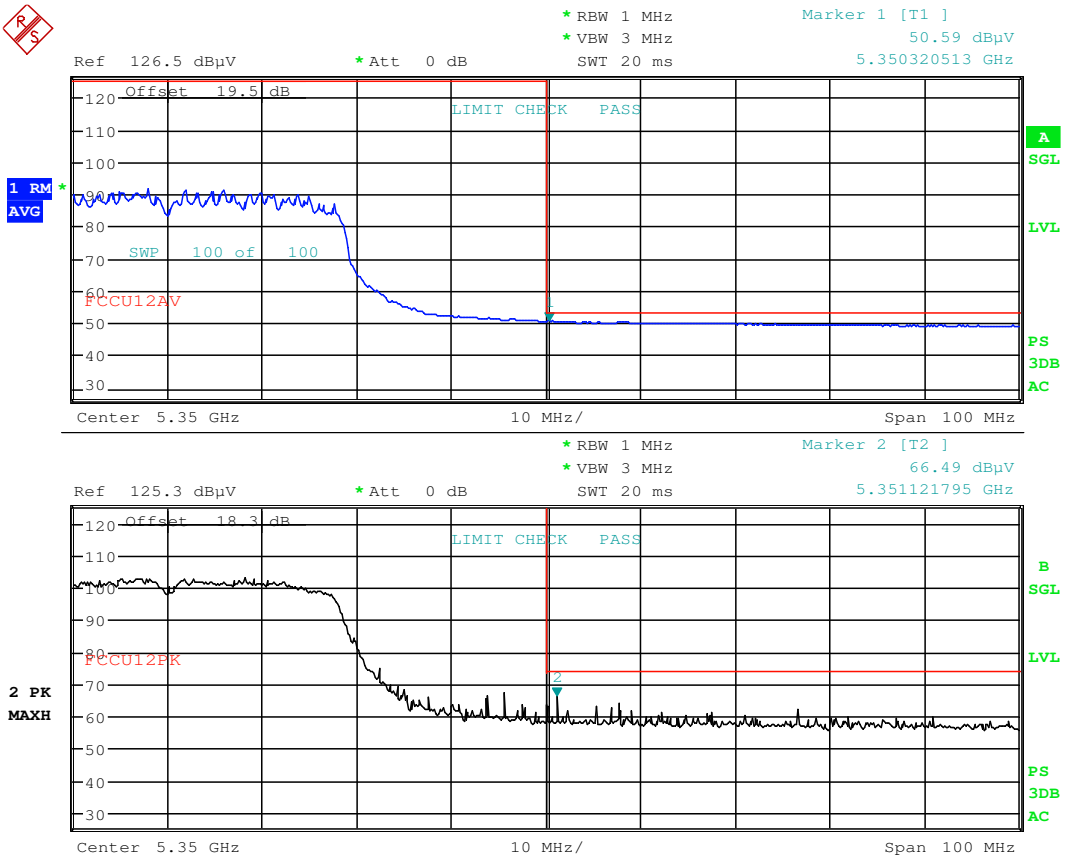

Date: 20.MAR.2016 23:36:37

Plot 7-194. Radiated Restricted Upper Band Edge Plot (UNII Band 2A)

© 2016 PCTEST Engineering Laboratory, Inc.

Antenna-2 Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11n (40MHz)
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5510MHz
Channel:	102

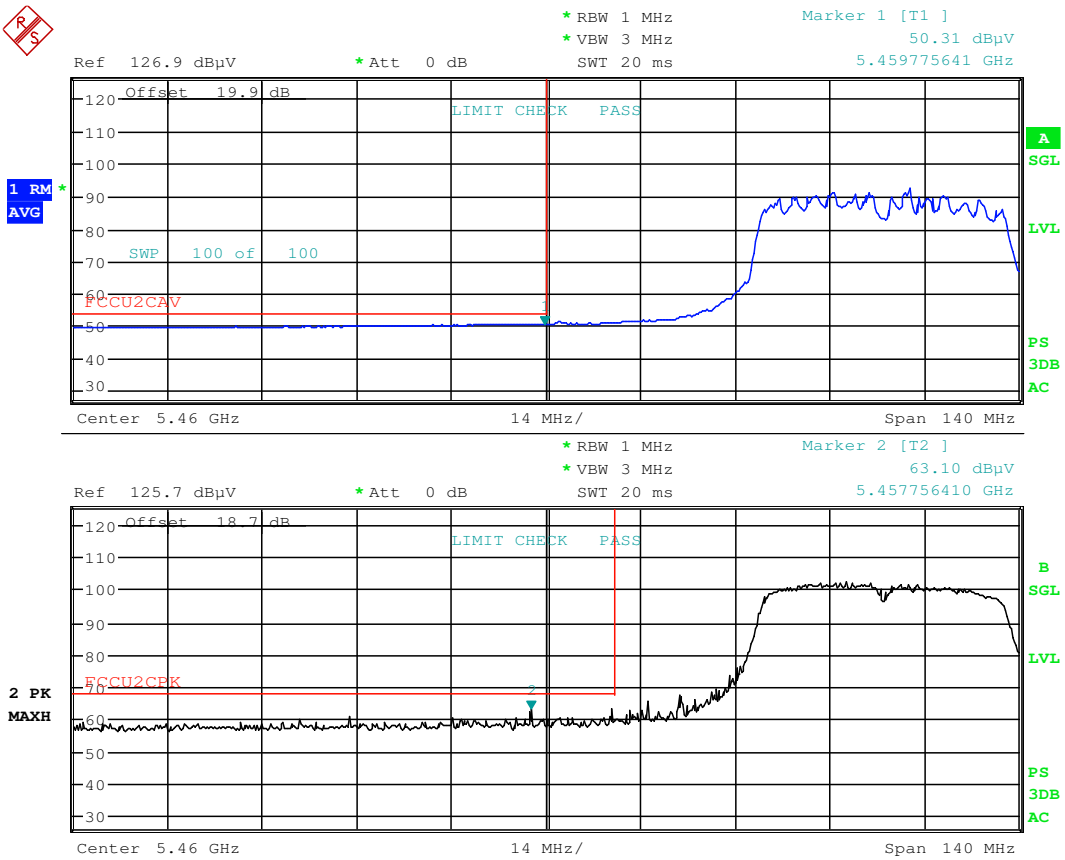

Date: 20.MAR.2016 23:48:18

Plot 7-195. Radiated Restricted Lower Band Edge Plot (UNII Band 2C)

© 2016 PCTEST Engineering Laboratory, Inc.

Antenna-2 Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11n (40MHz)
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5795MHz
Channel:	159

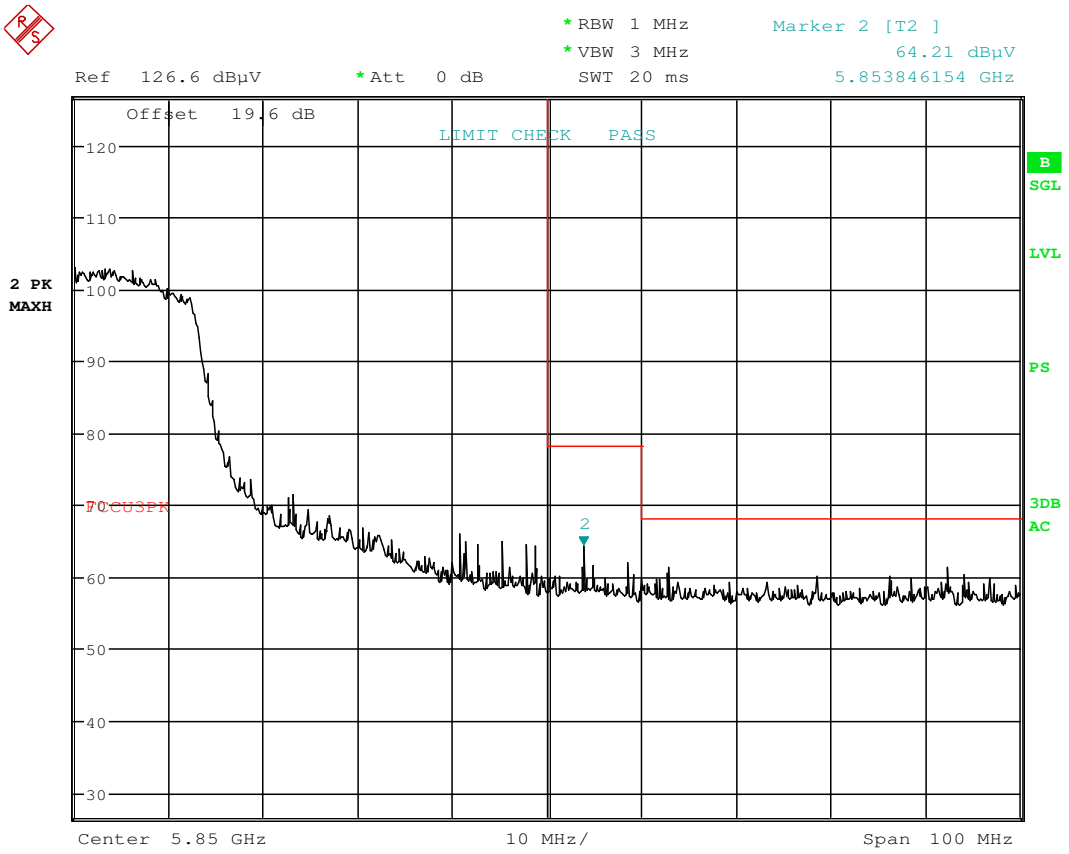

Date: 20.MAR.2016 23:54:21

Plot 7-196. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

© 2016 PCTEST Engineering Laboratory, Inc.

7.7.8 Antenna-2 Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11ac (80MHz)
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5210MHz
Channel:	42

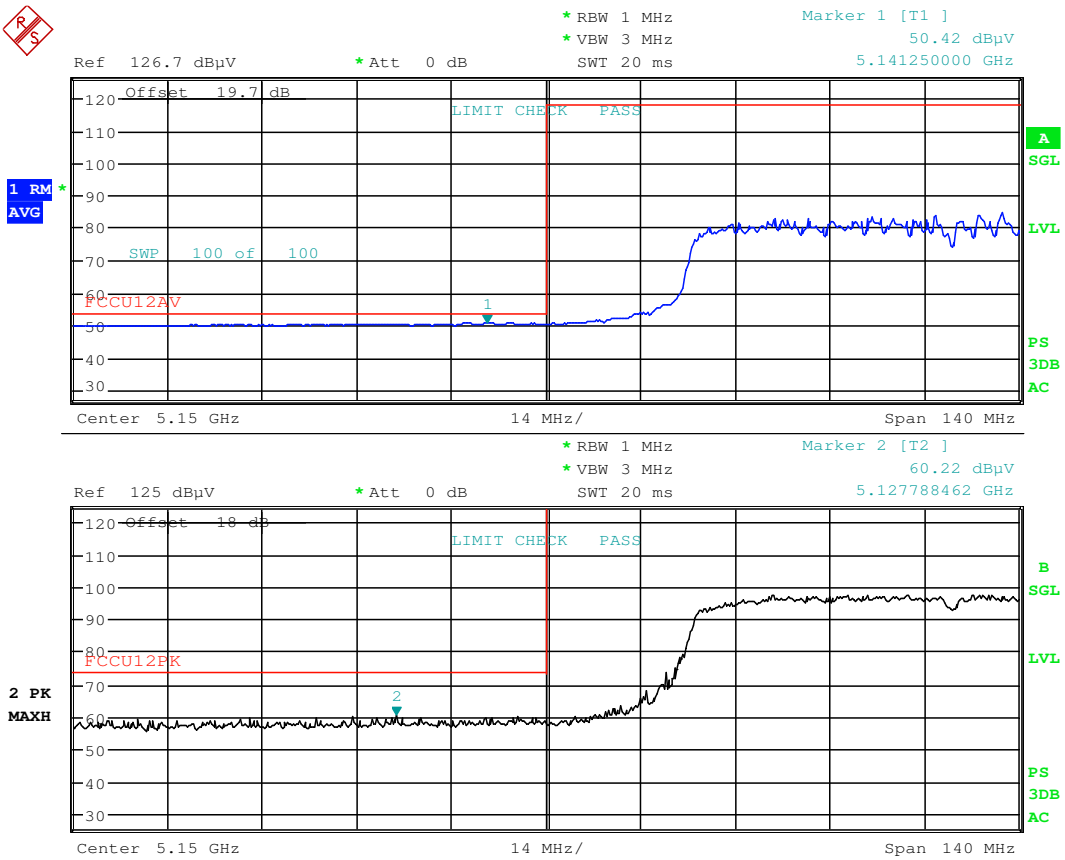

Date: 20.MAR.2016 23:31:42

Plot 7-197. Radiated Restricted Lower Band Edge Plot (UNII Band 1)

© 2016 PCTEST Engineering Laboratory, Inc.

Antenna-2 Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11ac (80MHz)
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5290MHz
Channel:	58

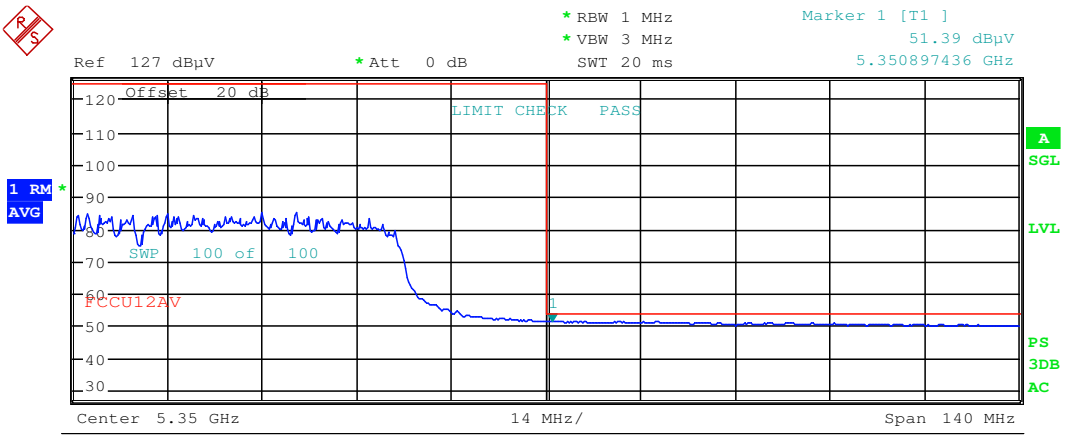

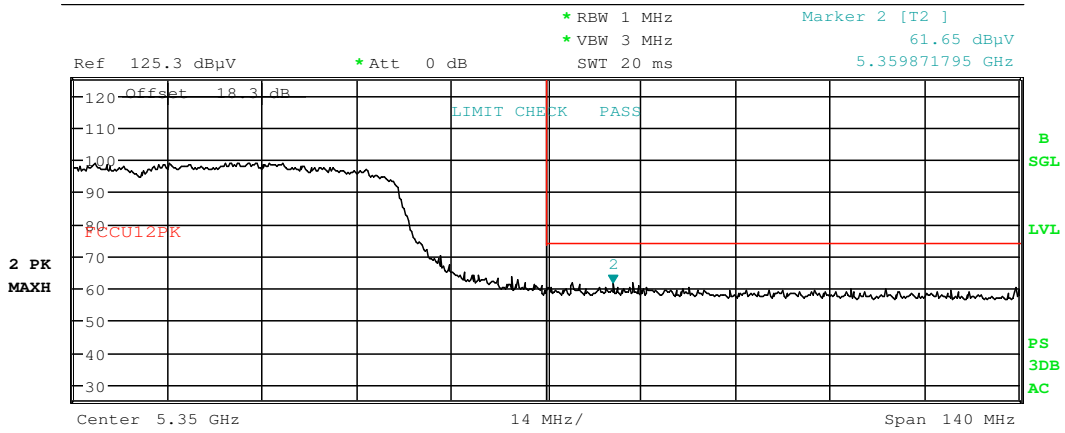

Date: 20.MAR.2016 23:38:50

Plot 7-198. Radiated Restricted Upper Band Edge Plot (UNII Band 2A)

© 2016 PCTEST Engineering Laboratory, Inc.

Antenna-2 Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11ac (80MHz)
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5530MHz
Channel:	106

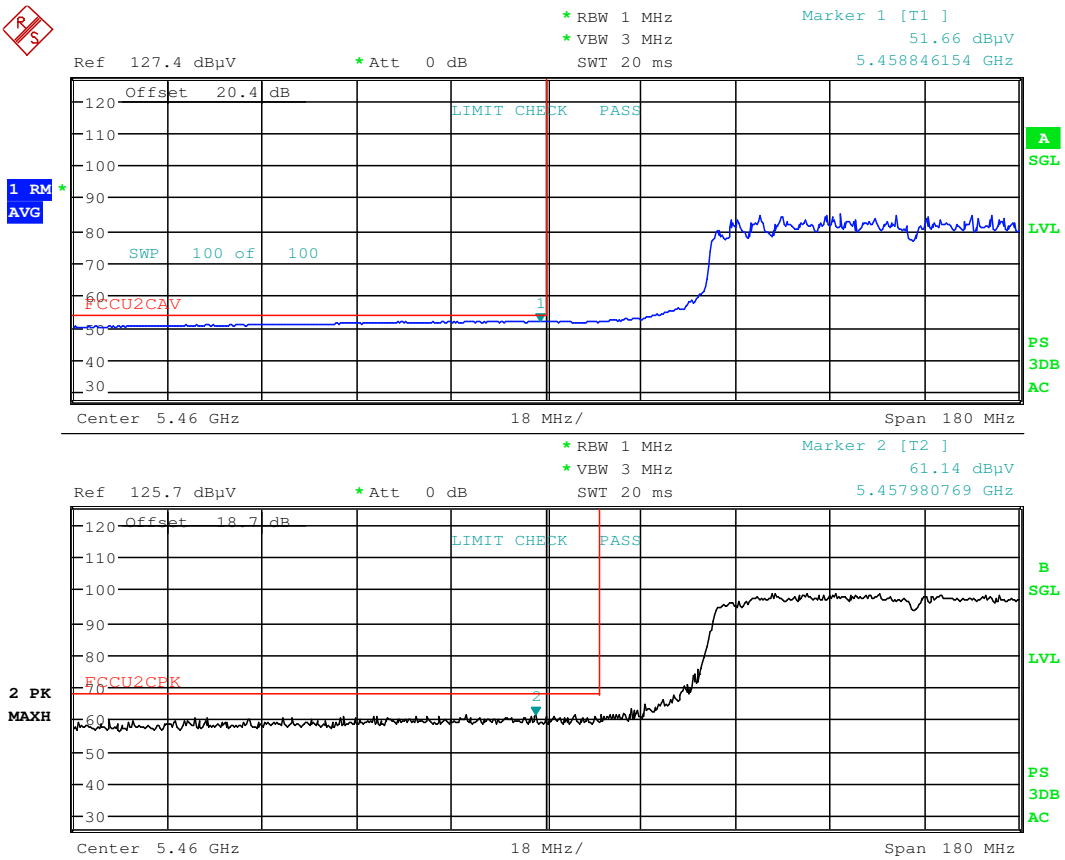

Date: 20.MAR.2016 23:49:05

Plot 7-199. Radiated Restricted Lower Band Edge Plot (UNII Band 2C)

© 2016 PCTEST Engineering Laboratory, Inc.

Antenna-2 Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11ac (80MHz)
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5775MHz
Channel:	155

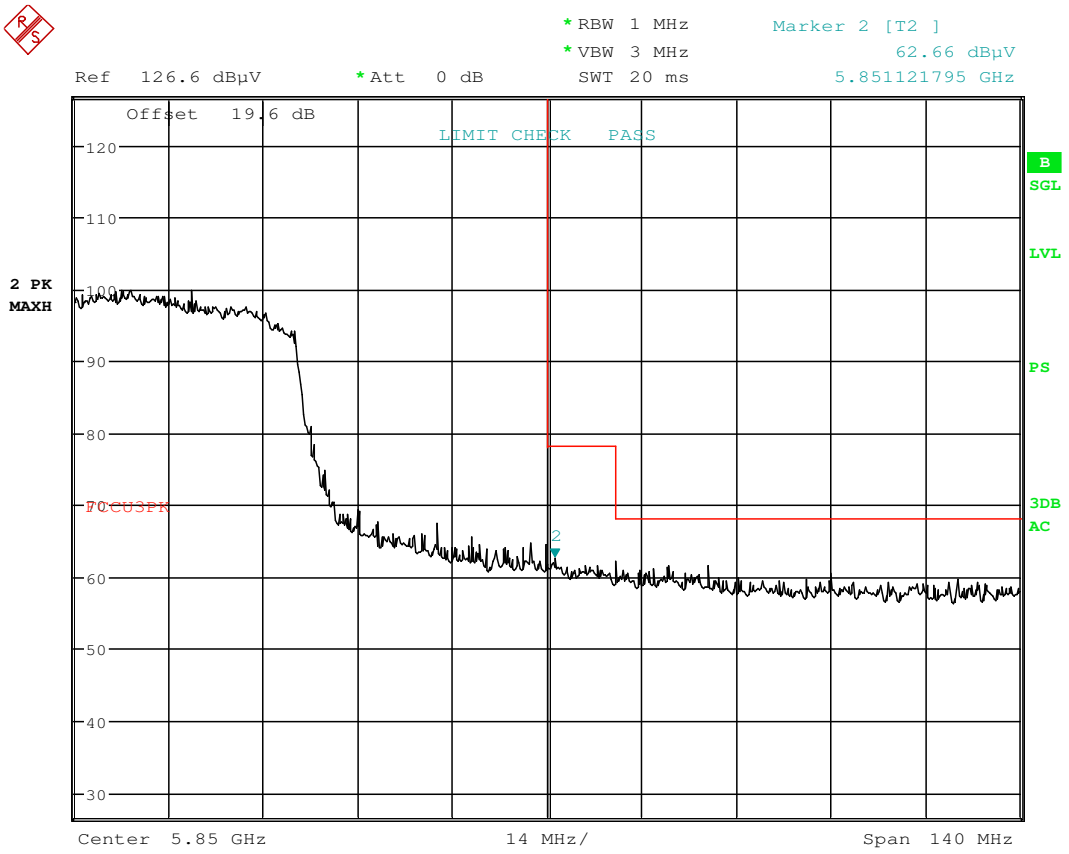

Date: 20.MAR.2016 23:54:59

Plot 7-200. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

© 2016 PCTEST Engineering Laboratory, Inc.

7.7.9 MIMO Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11n (20MHz)
Worst Case Transfer Rate:	MCS8
Distance of Measurements:	3 Meters
Operating Frequency:	5180MHz
Channel:	36

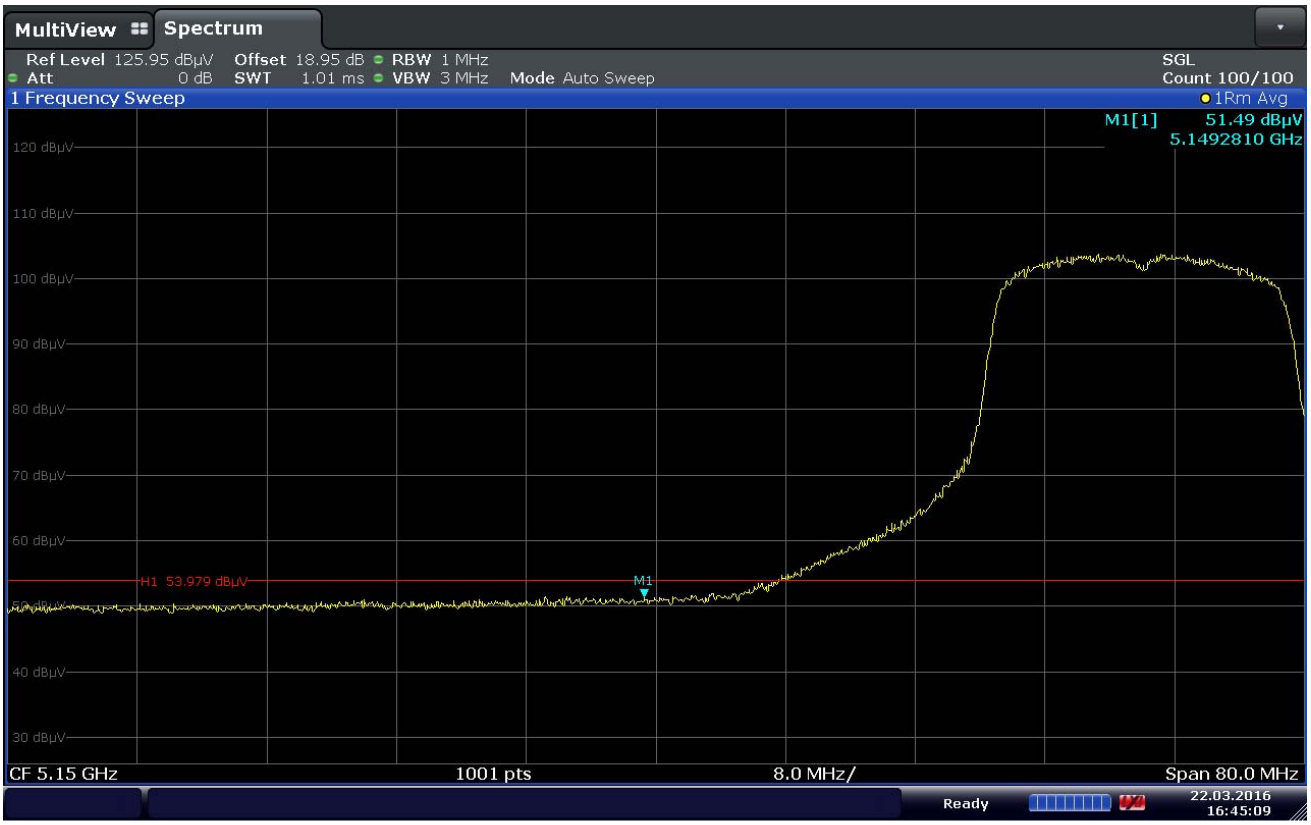

Plot 7-201. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

© 2016 PCTEST Engineering Laboratory, Inc.

MIMO Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

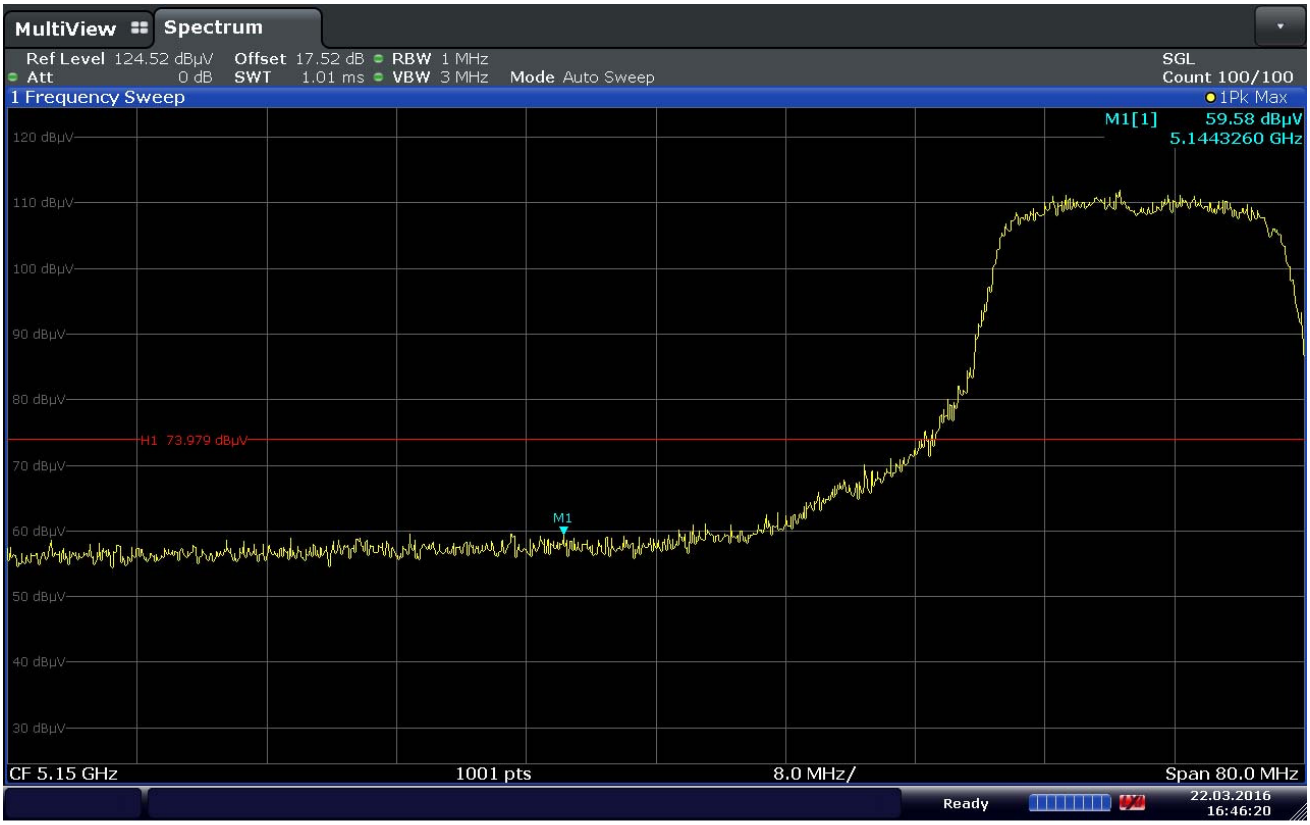

Plot 7-202. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

© 2016 PCTEST Engineering Laboratory, Inc.

MIMO Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11n (20MHz)
Worst Case Transfer Rate:	MCS8
Distance of Measurements:	3 Meters
Operating Frequency:	5320MHz
Channel:	64

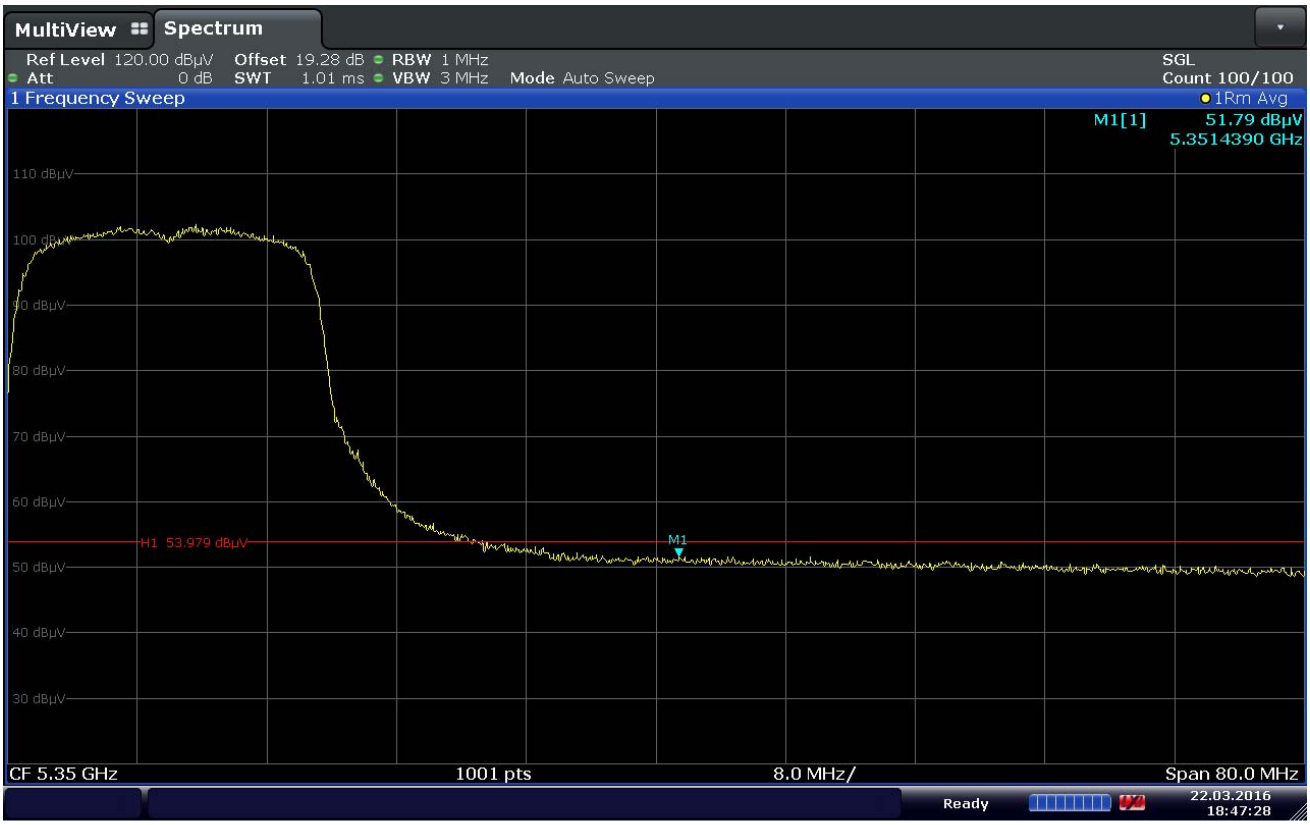

Plot 7-203. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

© 2016 PCTEST Engineering Laboratory, Inc.

MIMO Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

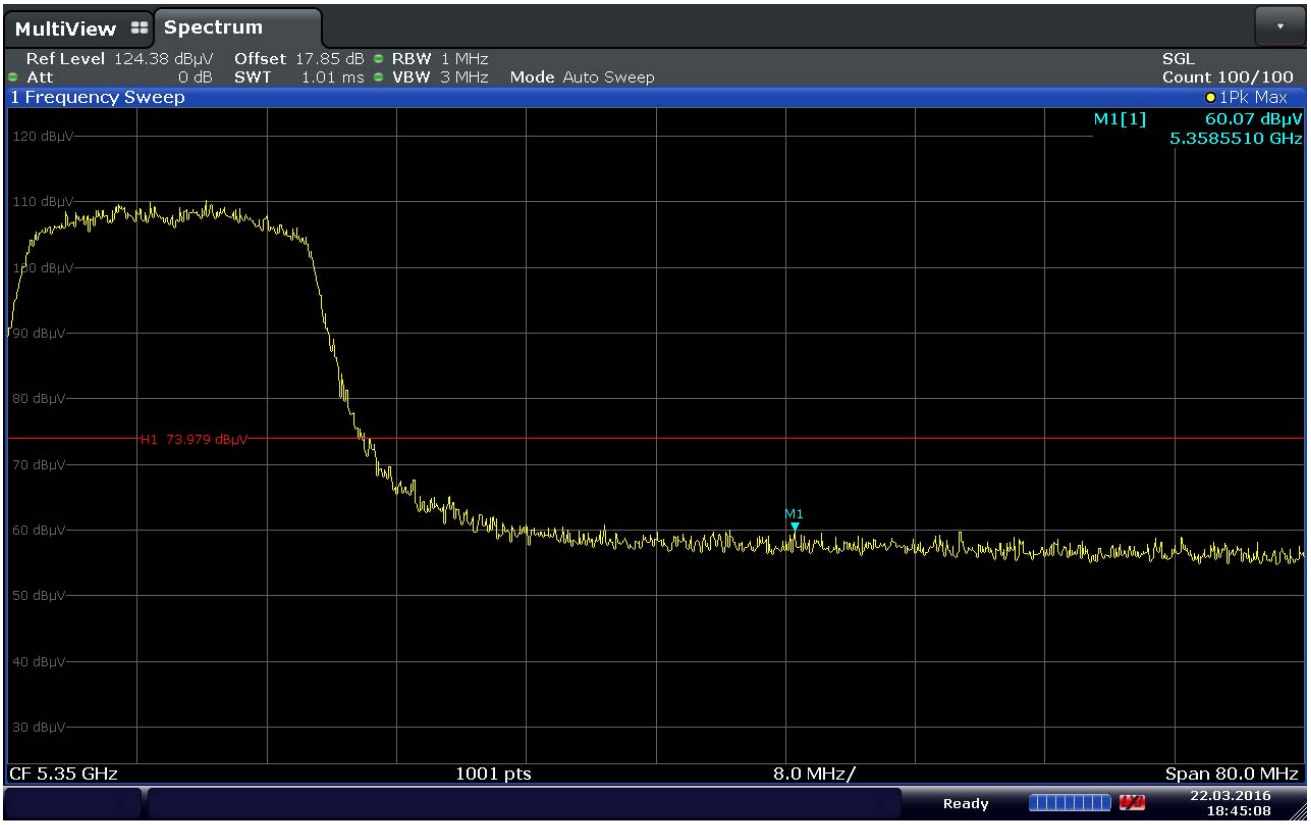

Plot 7-204. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

© 2016 PCTEST Engineering Laboratory, Inc.

MIMO Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11n (20MHz)
Worst Case Transfer Rate:	MCS8
Distance of Measurements:	3 Meters
Operating Frequency:	5500MHz
Channel:	100

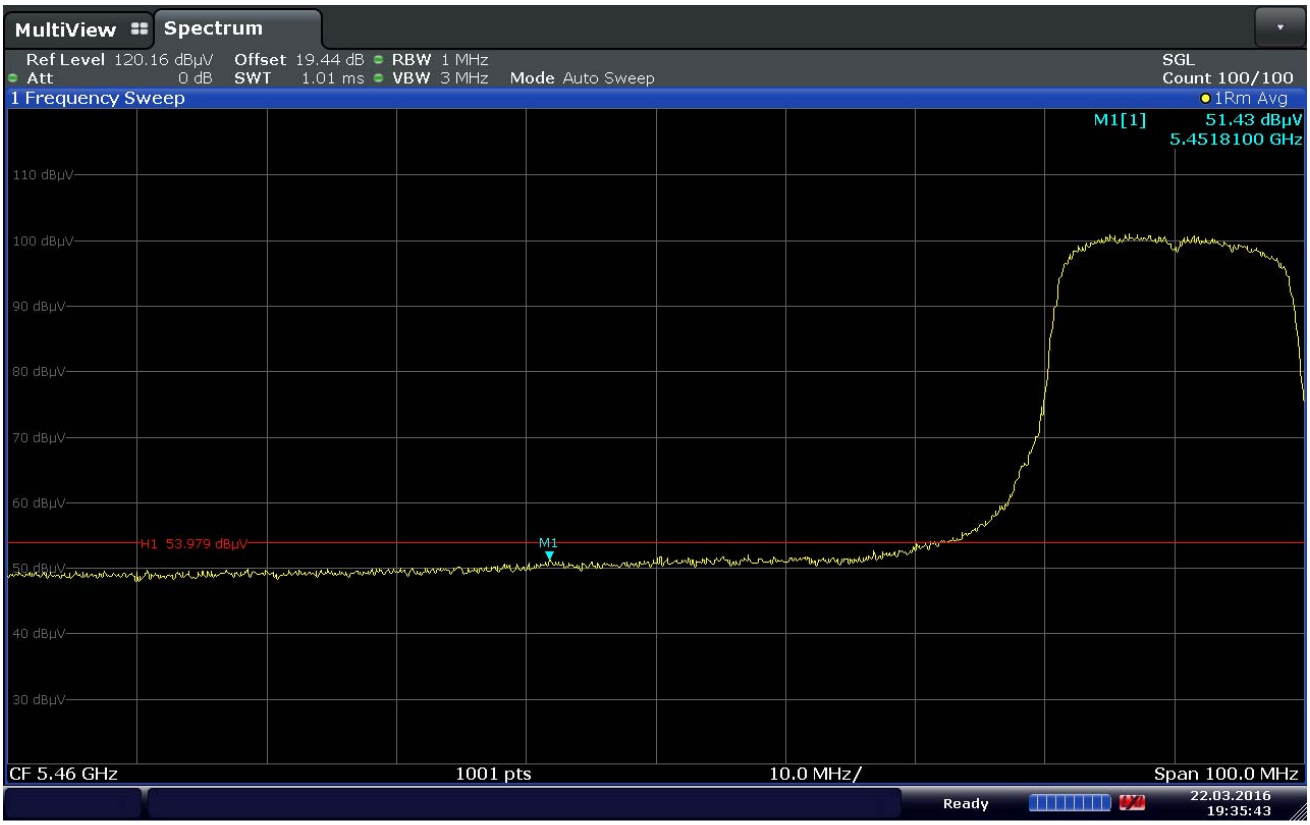

Plot 7-205. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

© 2016 PCTEST Engineering Laboratory, Inc.

MIMO Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

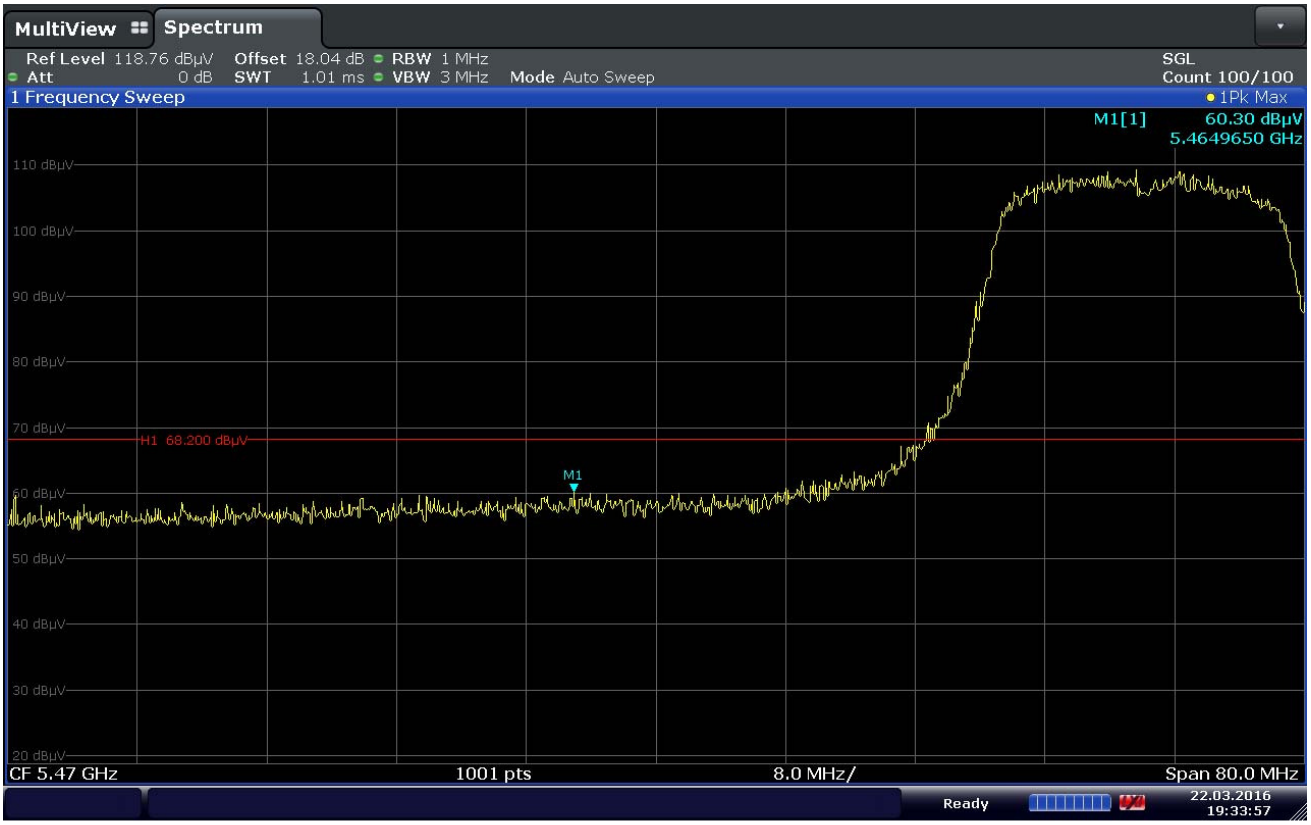

Plot 7-206. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

© 2016 PCTEST Engineering Laboratory, Inc.

MIMO Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11n (20MHz)
Worst Case Transfer Rate:	MCS8
Distance of Measurements:	3 Meters
Operating Frequency:	5825MHz
Channel:	165

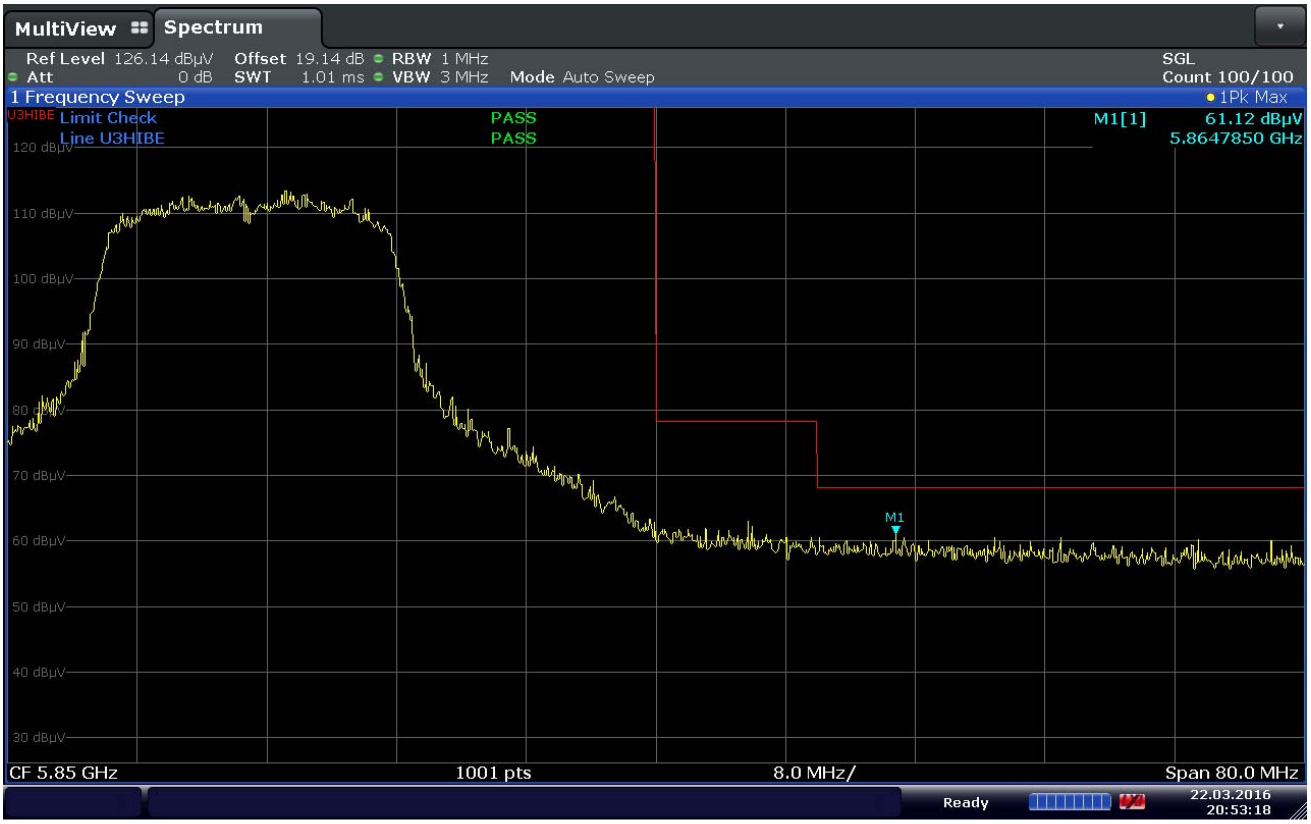

Plot 7-207. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

© 2016 PCTEST Engineering Laboratory, Inc.

7.7.10 MIMO Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11n (40MHz)
Worst Case Transfer Rate:	MCS8
Distance of Measurements:	3 Meters
Operating Frequency:	5190MHz
Channel:	38

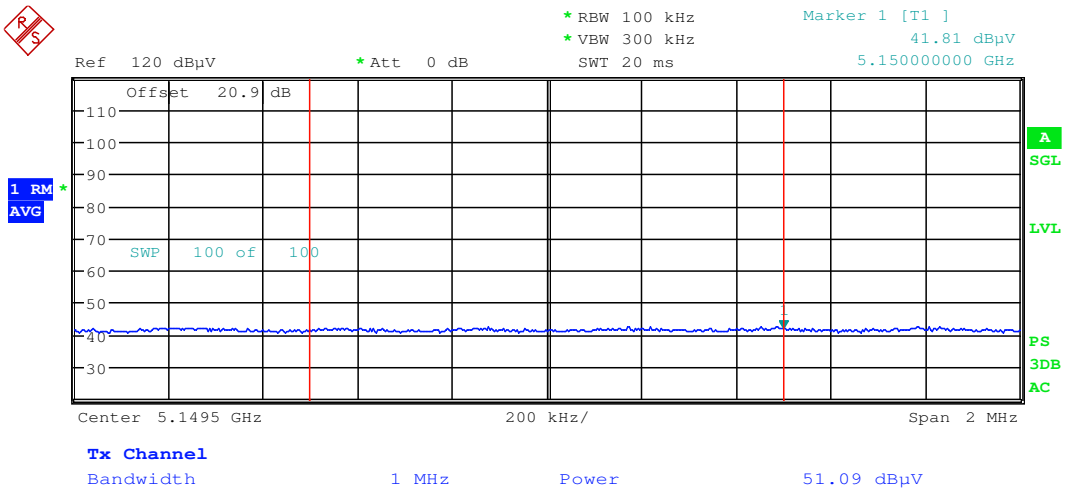

Date: 23.MAR.2016 16:52:46

Plot 7-208. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

© 2016 PCTEST Engineering Laboratory, Inc.

MIMO Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

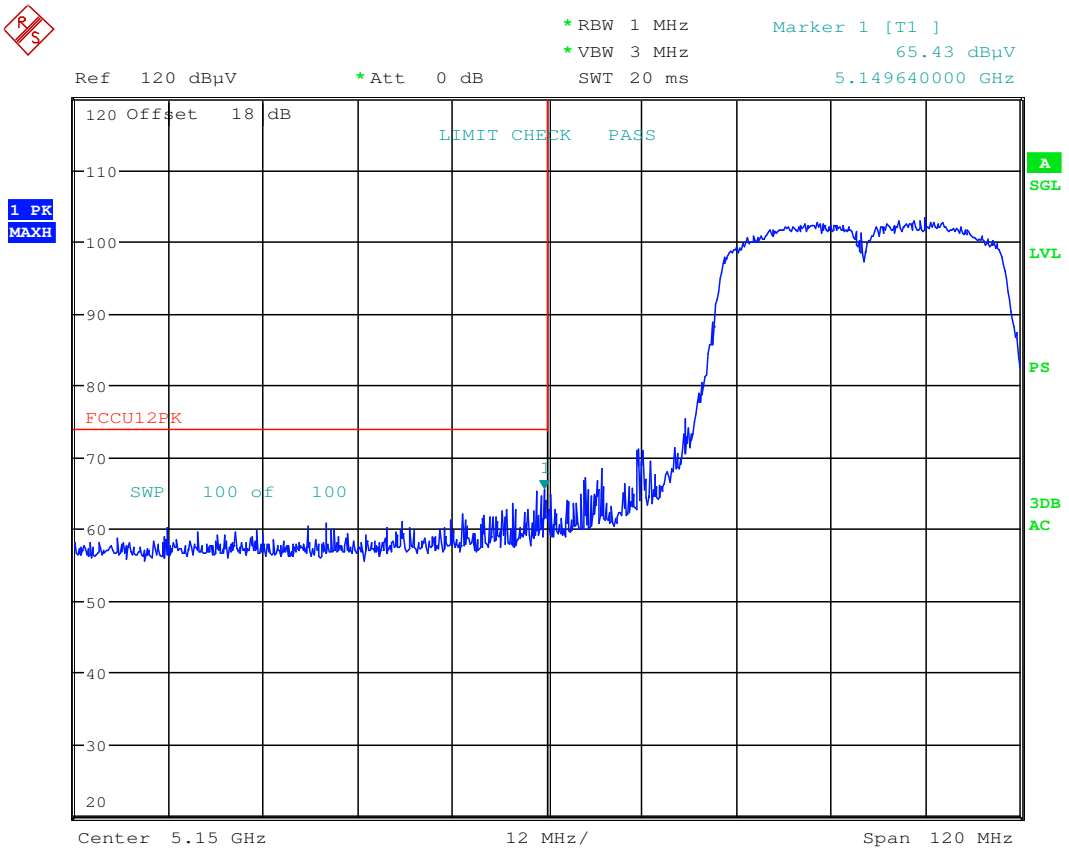

Date: 23.MAR.2016 16:53:41

Plot 7-209. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

© 2016 PCTEST Engineering Laboratory, Inc.

MIMO Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11n (40MHz)
Worst Case Transfer Rate:	MCS8
Distance of Measurements:	3 Meters
Operating Frequency:	5310MHz
Channel:	62

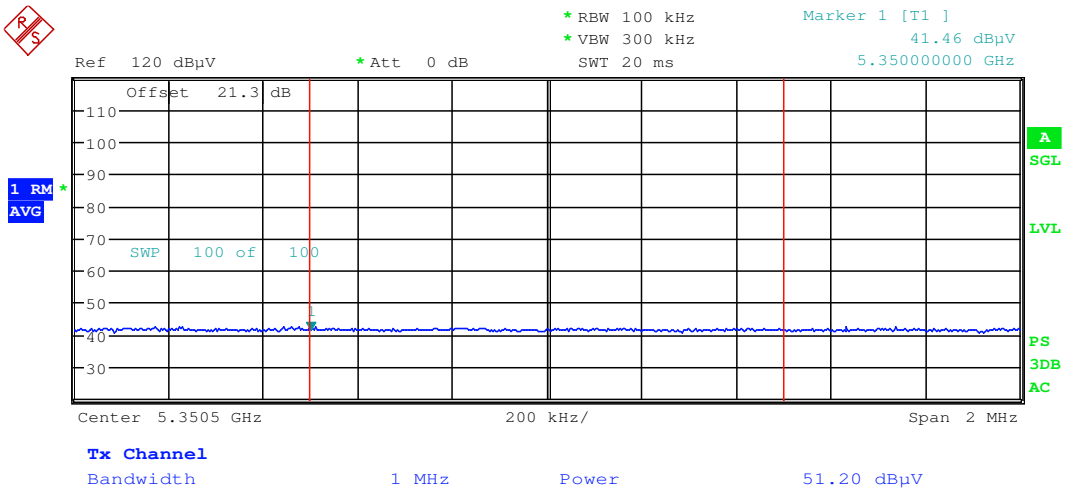

Date: 23.MAR.2016 17:00:55

Plot 7-210. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

© 2016 PCTEST Engineering Laboratory, Inc.

MIMO Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

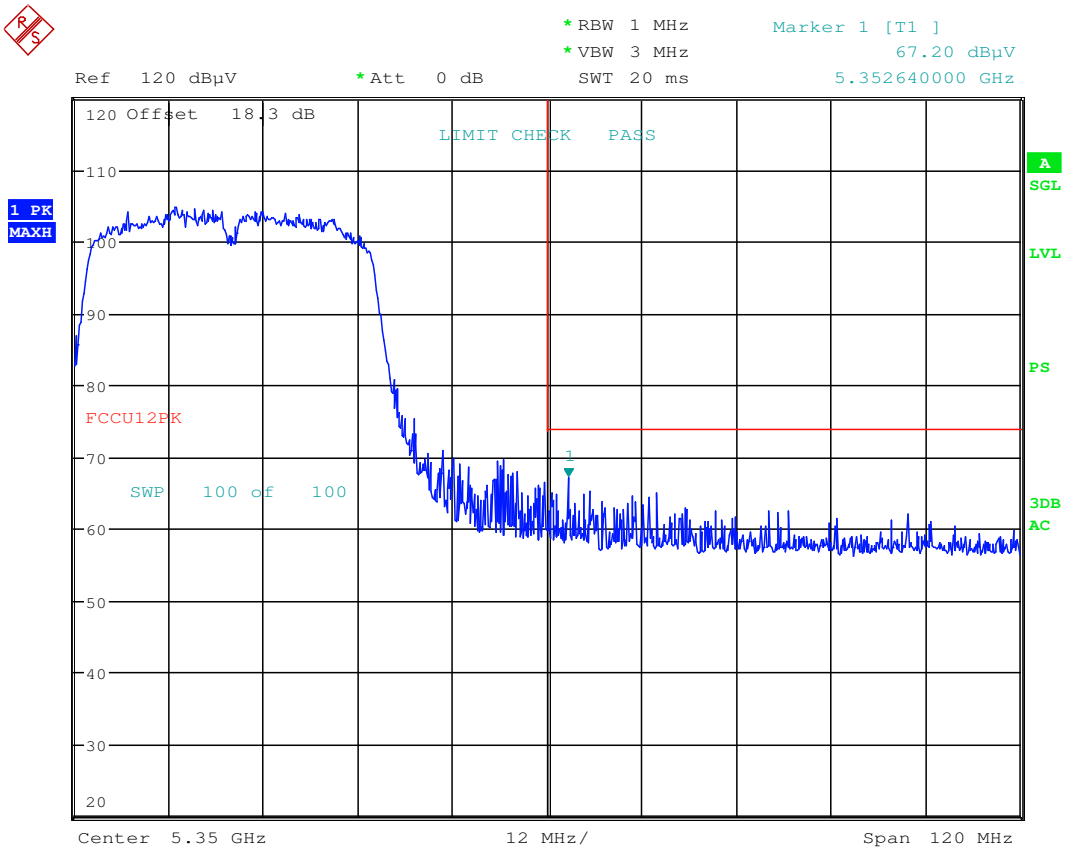

Date: 23.MAR.2016 17:08:09

Plot 7-211. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

© 2016 PCTEST Engineering Laboratory, Inc.

MIMO Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11n (40MHz)
Worst Case Transfer Rate:	MCS8
Distance of Measurements:	3 Meters
Operating Frequency:	5510MHz
Channel:	102

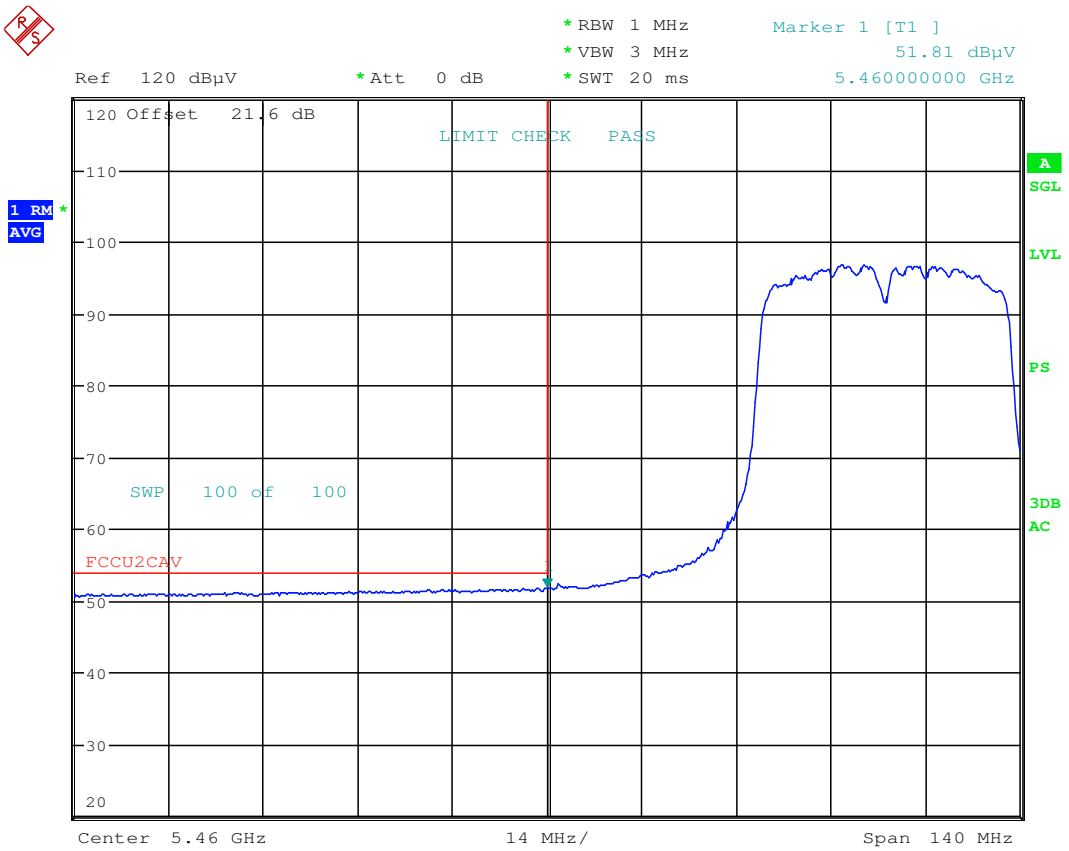

Date: 23.MAR.2016 17:59:25

Plot 7-212. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

© 2016 PCTEST Engineering Laboratory, Inc.

MIMO Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

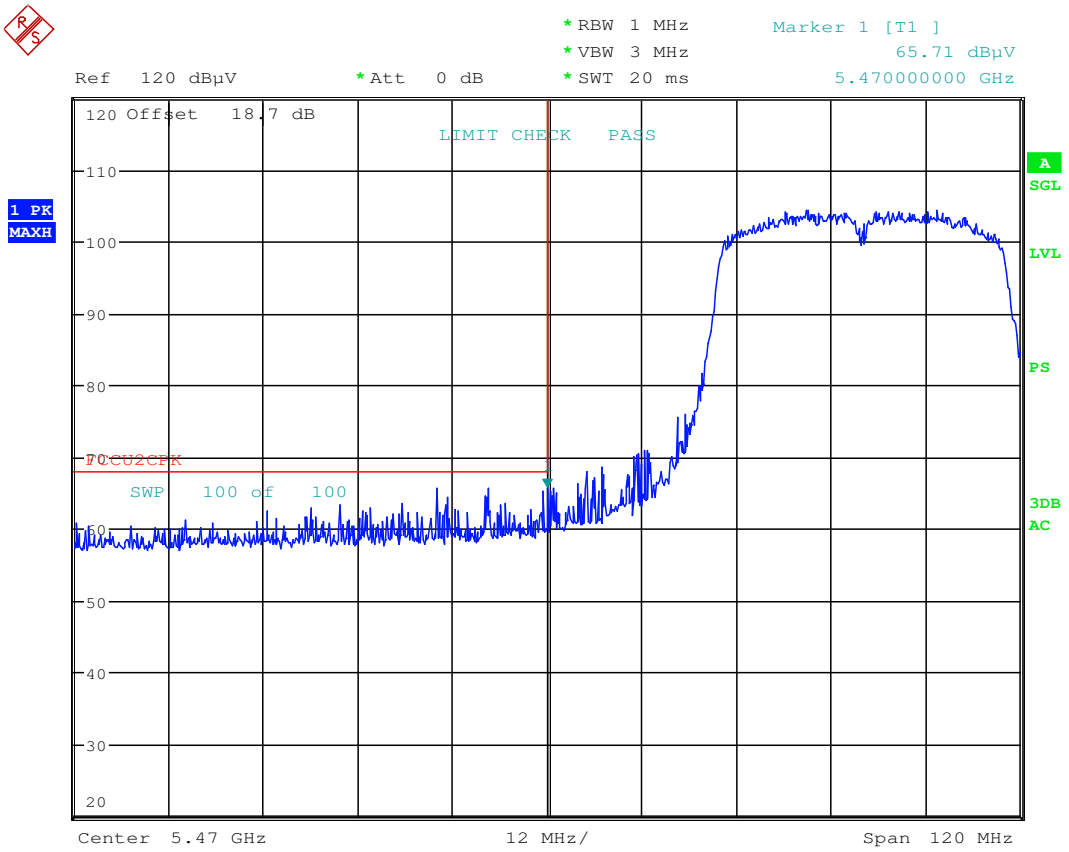

Date: 23.MAR.2016 18:00:52

Plot 7-213. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

© 2016 PCTEST Engineering Laboratory, Inc.

MIMO Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11n (40MHz)
Worst Case Transfer Rate:	MCS8
Distance of Measurements:	3 Meters
Operating Frequency:	5795MHz
Channel:	159

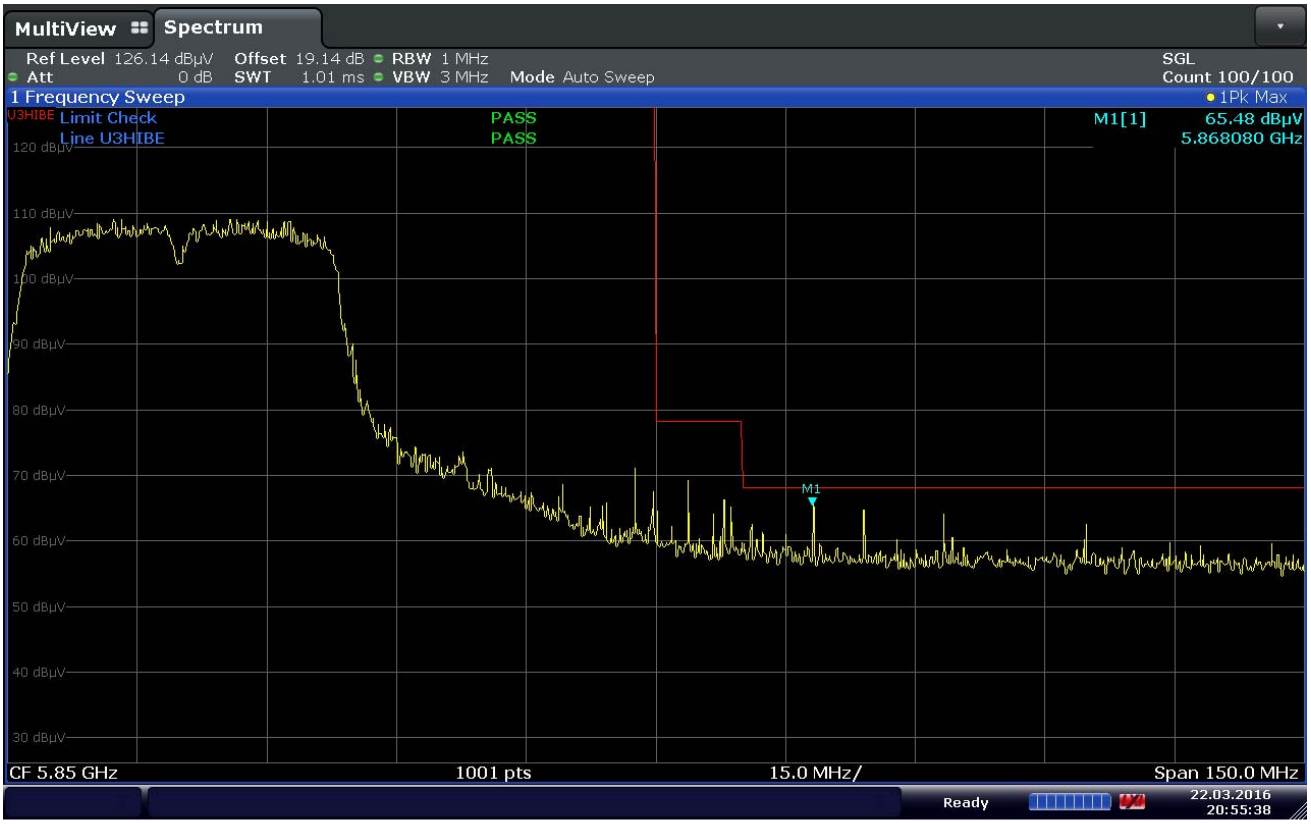

Plot 7-214. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

© 2016 PCTEST Engineering Laboratory, Inc.

7.7.11 MIMO Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11ac (80MHz)
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5210MHz
Channel:	42

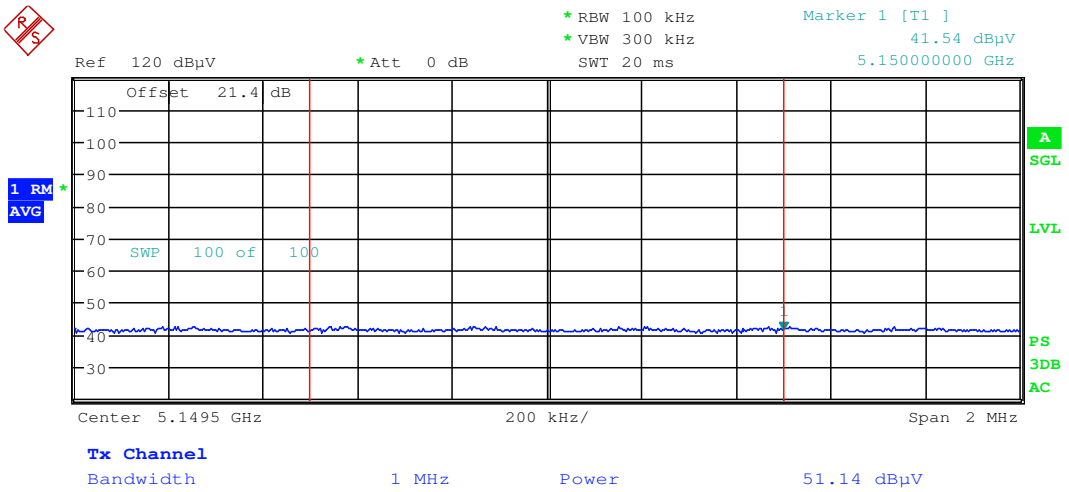

Date: 23.MAR.2016 16:41:57

Plot 7-215. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

© 2016 PCTEST Engineering Laboratory, Inc.

MIMO Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

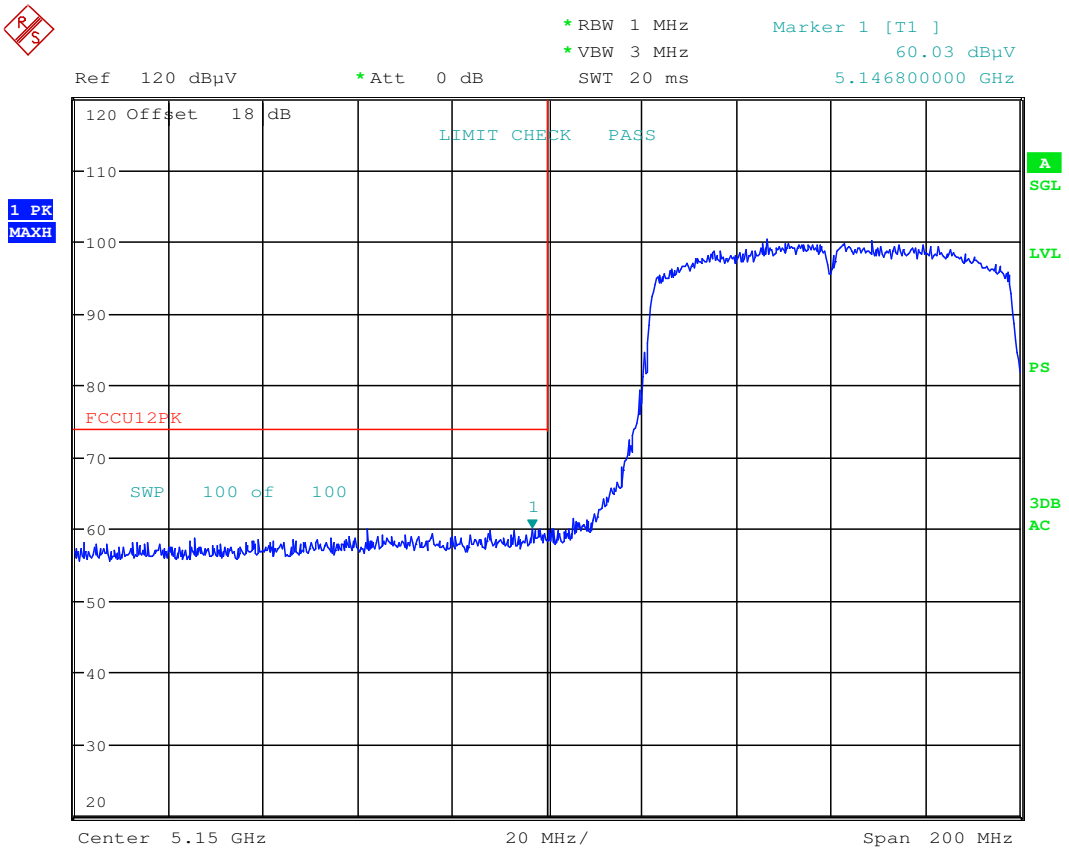

Date: 23.MAR.2016 16:43:45

Plot 7-216. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

© 2016 PCTEST Engineering Laboratory, Inc.

MIMO Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11ac (80MHz)
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5290MHz
Channel:	58

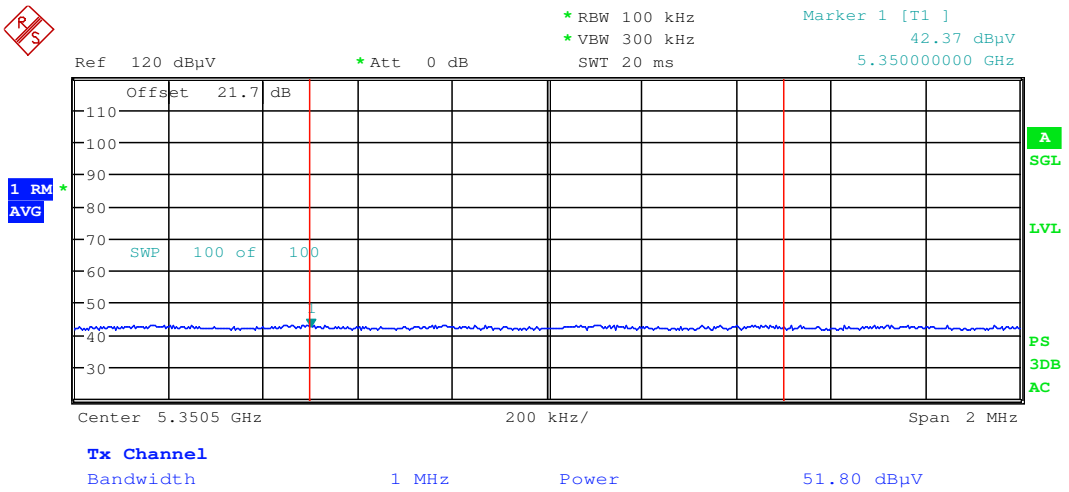

Date: 23.MAR.2016 17:12:03

Plot 7-217. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

© 2016 PCTEST Engineering Laboratory, Inc.

MIMO Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

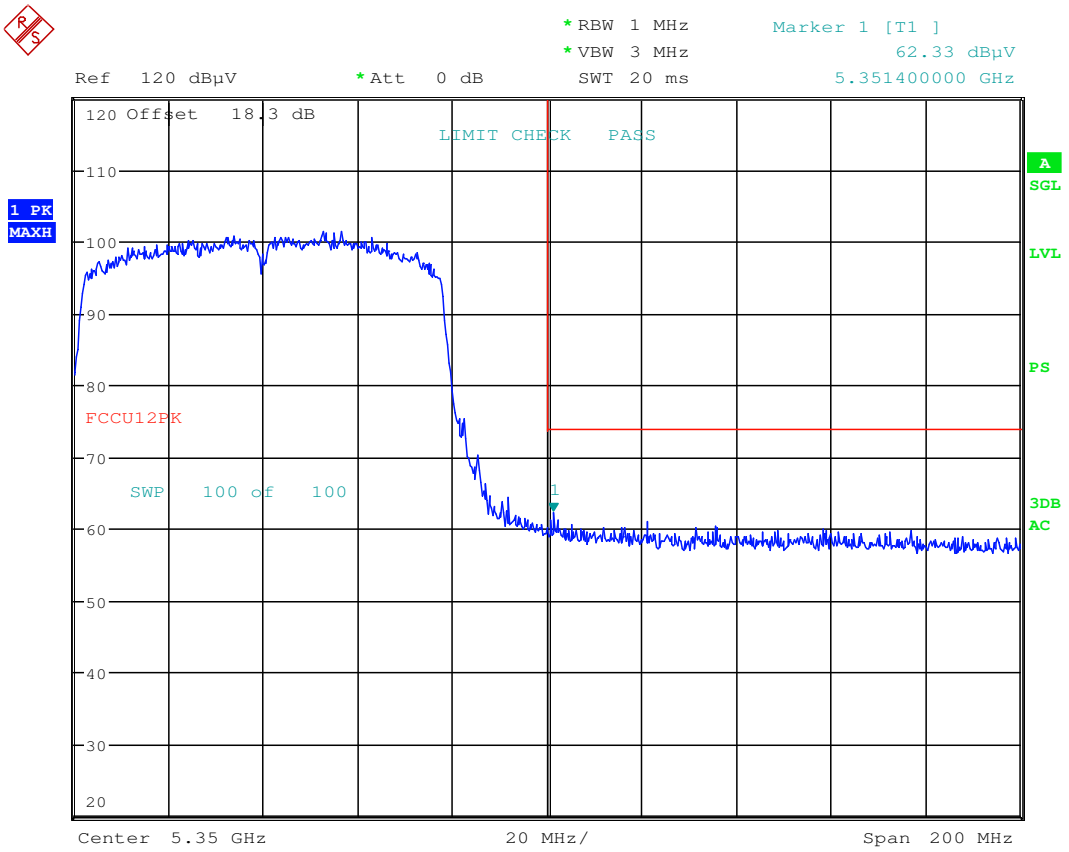

Date: 23.MAR.2016 17:13:20

Plot 7-218. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

© 2016 PCTEST Engineering Laboratory, Inc.

MIMO Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11ac (80MHz)
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5530MHz
Channel:	106

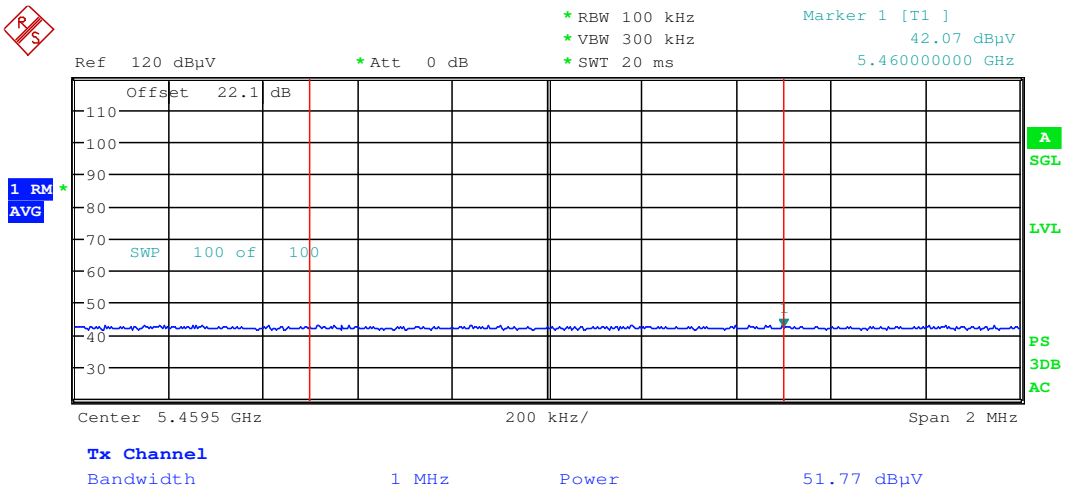

Date: 23.MAR.2016 17:54:07

Plot 7-219. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

© 2016 PCTEST Engineering Laboratory, Inc.

MIMO Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

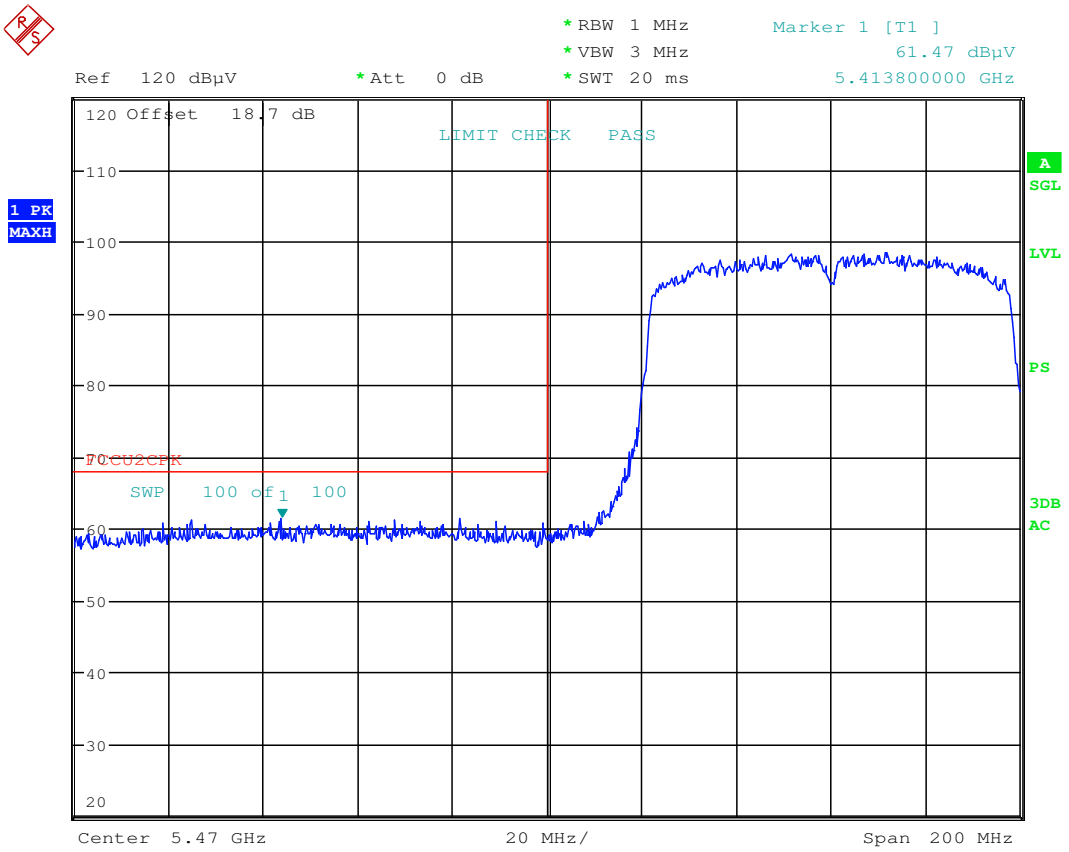

Date: 23.MAR.2016 17:55:54

Plot 7-220. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

© 2016 PCTEST Engineering Laboratory, Inc.

MIMO Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11ac (80MHz)
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5775MHz
Channel:	155

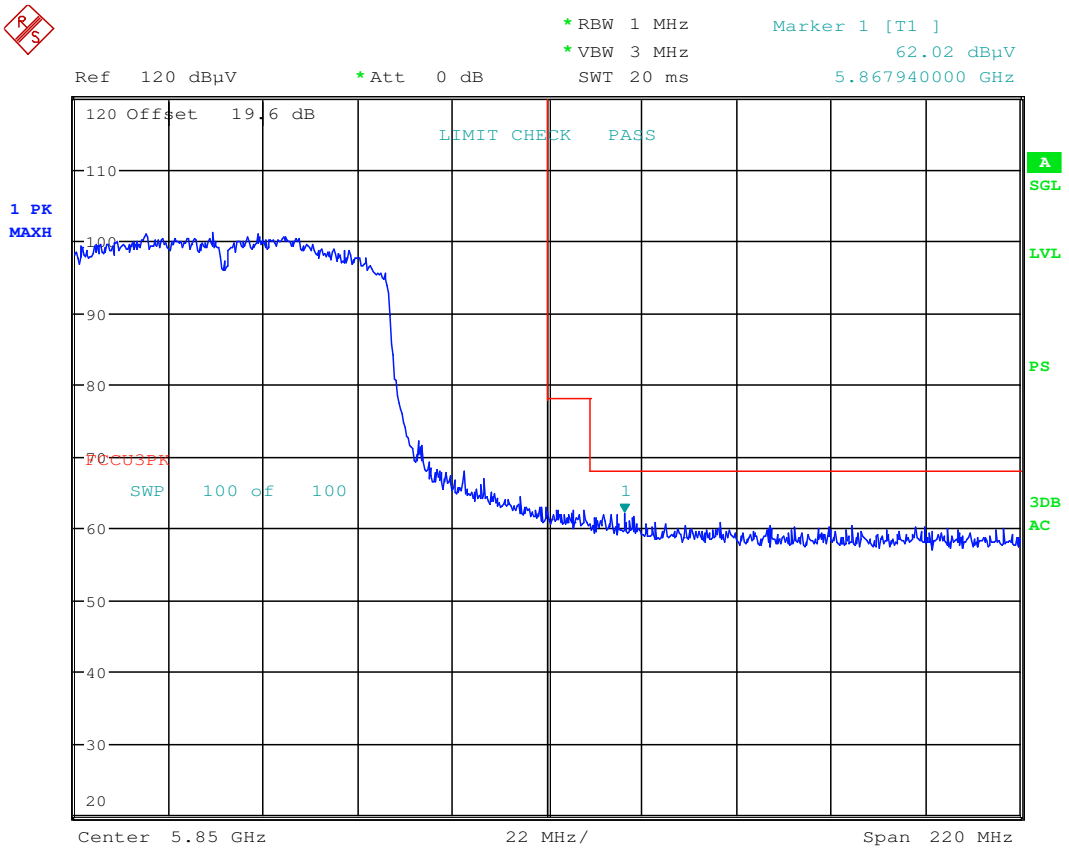

Date: 23.MAR.2016 18:14:20

Plot 7-221. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

© 2016 PCTEST Engineering Laboratory, Inc.

7.8 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-52 per Section 15.209.

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-52. Radiated Limits

Test Procedures Used

ANSI C63.4-2014

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

© 2016 PCTEST Engineering Laboratory, Inc.

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

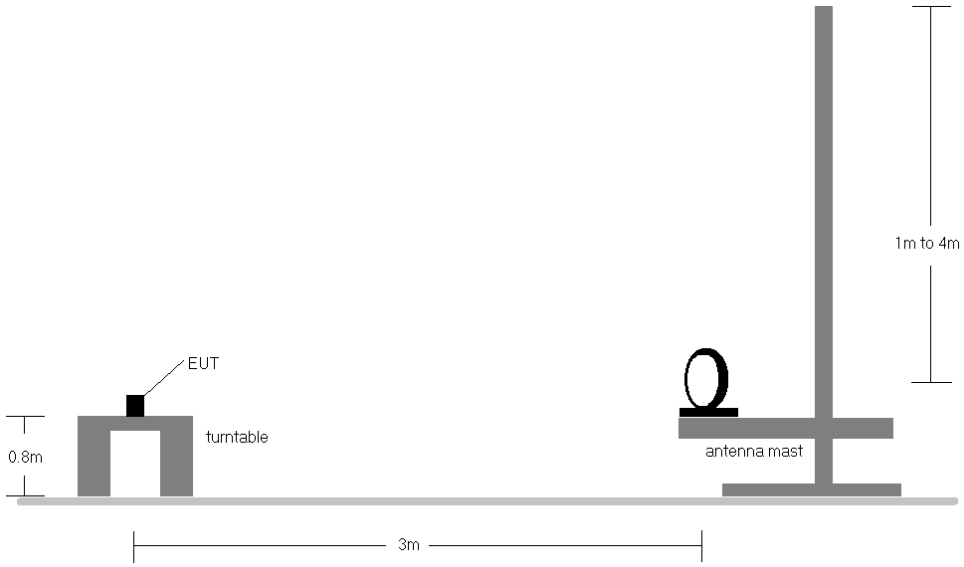

Figure 7-6. Radiated Test Setup < 30MHz

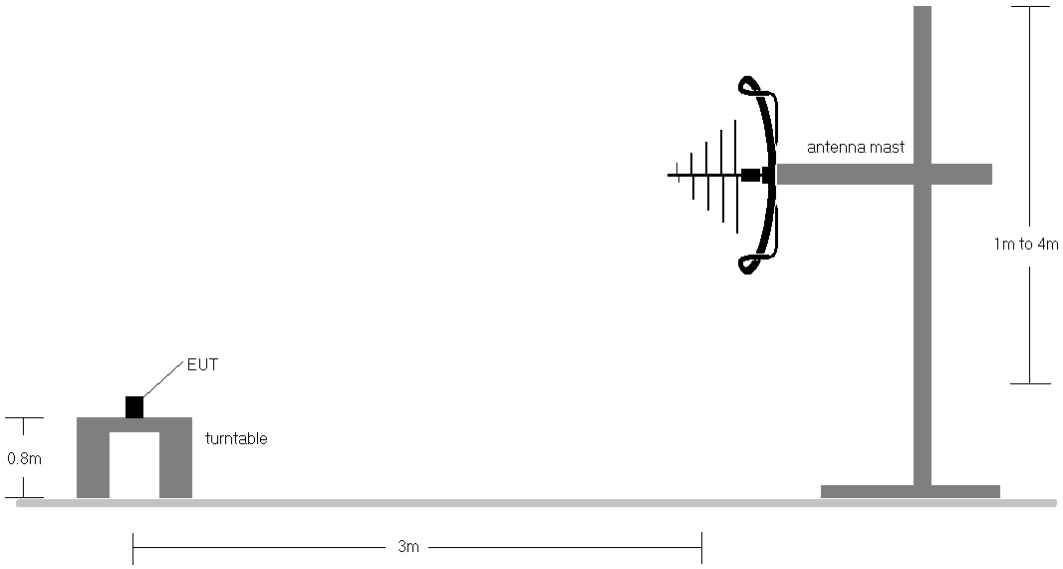

Figure 7-7. Radiated Test Setup < 1GHz

© 2016 PCTEST Engineering Laboratory, Inc.

Test Notes

1. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-27.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

© 2016 PCTEST Engineering Laboratory, Inc.

Antenna-1 Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209

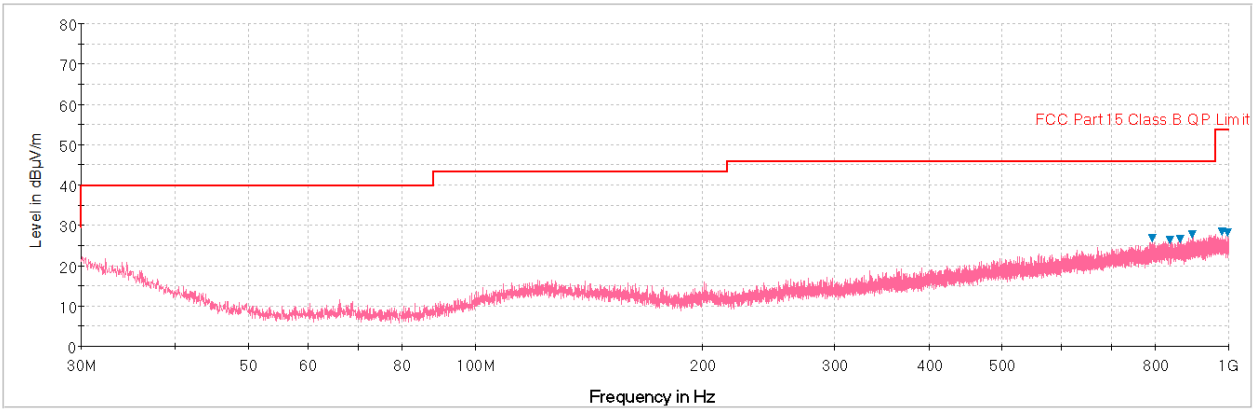

Plot 7-222. Radiated Spurious Plot below 1GHz (802.11a – U3 Ch. 157, Ant. Pol. H)

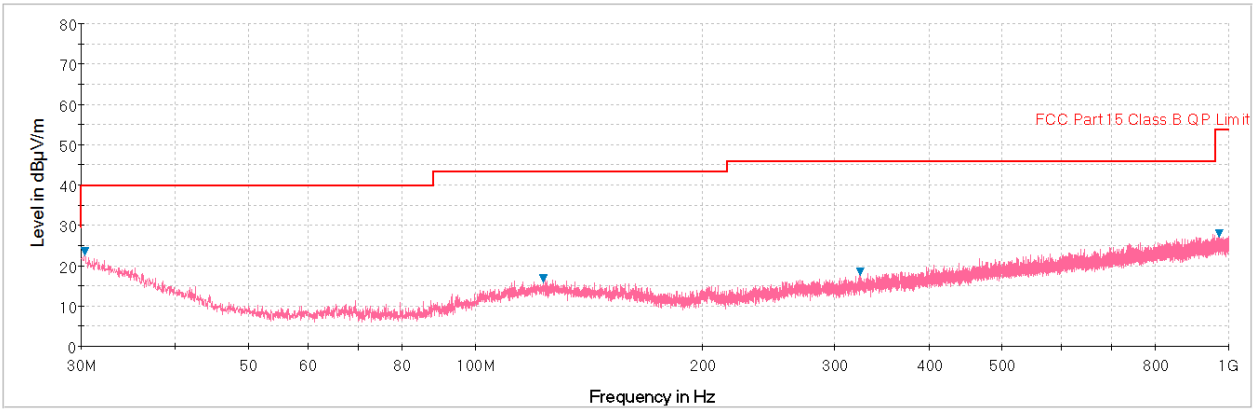

Plot 7-223. Radiated Spurious Plot below 1GHz (802.11a – U3 Ch. 157, Ant. Pol. V)

© 2016 PCTEST Engineering Laboratory, Inc.

Antenna-2 Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209

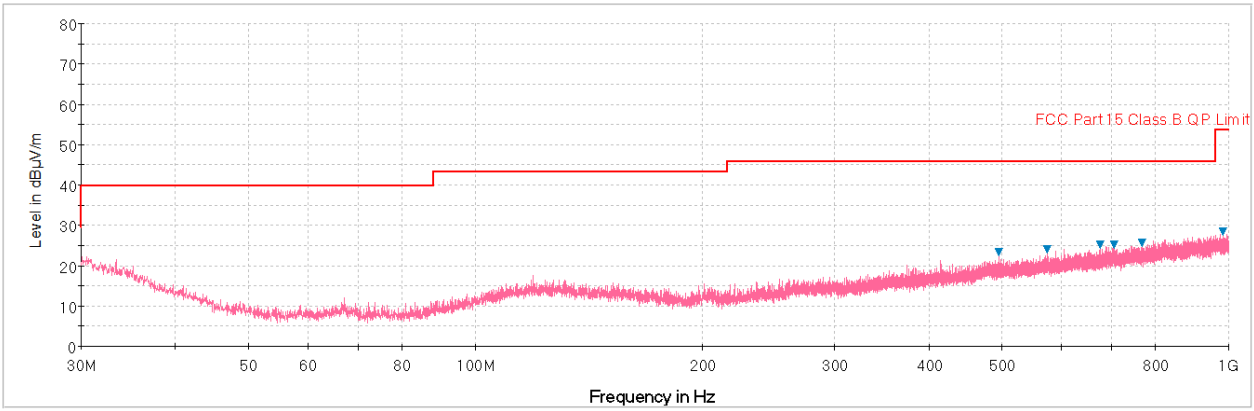

Plot 7-224. Radiated Spurious Plot below 1GHz (802.11a – U3 Ch. 157, Ant. Pol. H)

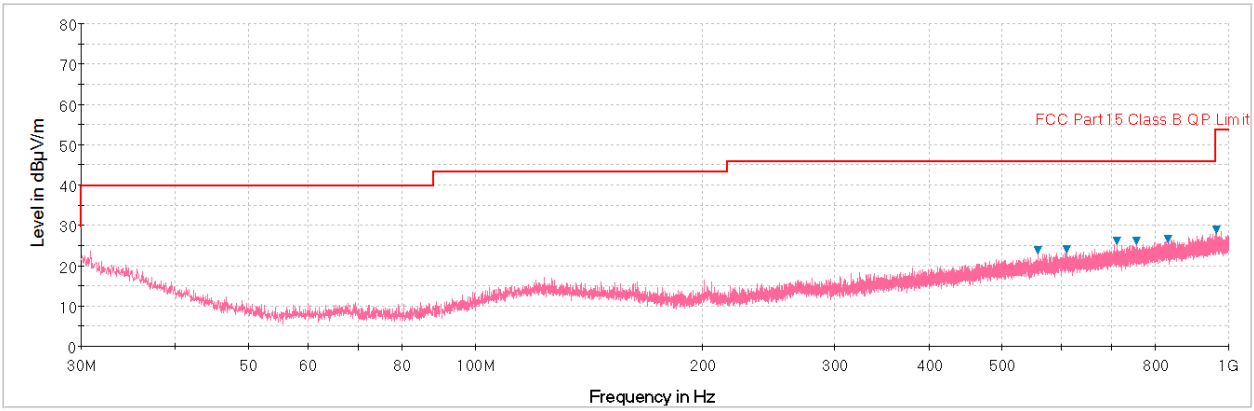

Plot 7-225. Radiated Spurious Plot below 1GHz (802.11a – U3 Ch. 157, Ant. Pol. V)

© 2016 PCTEST Engineering Laboratory, Inc.

7.9 Line-Conducted Test Data

§15.407

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207.

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-53. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

© 2016 PCTEST Engineering Laboratory, Inc.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

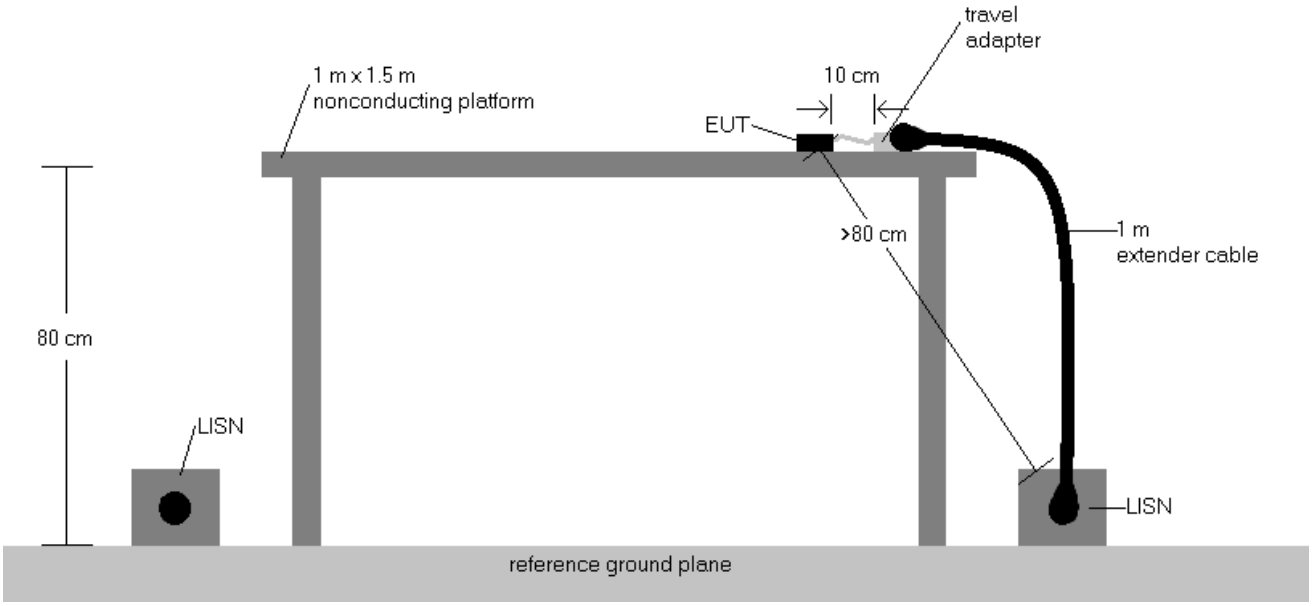

Figure 7-8. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207.
3. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
4. QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
5. Margin (dB) = QP/AV Limit (dBμV) - QP/AV Level (dBμV)
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

© 2016 PCTEST Engineering Laboratory, Inc.

Line-Conducted Test Data

§15.407

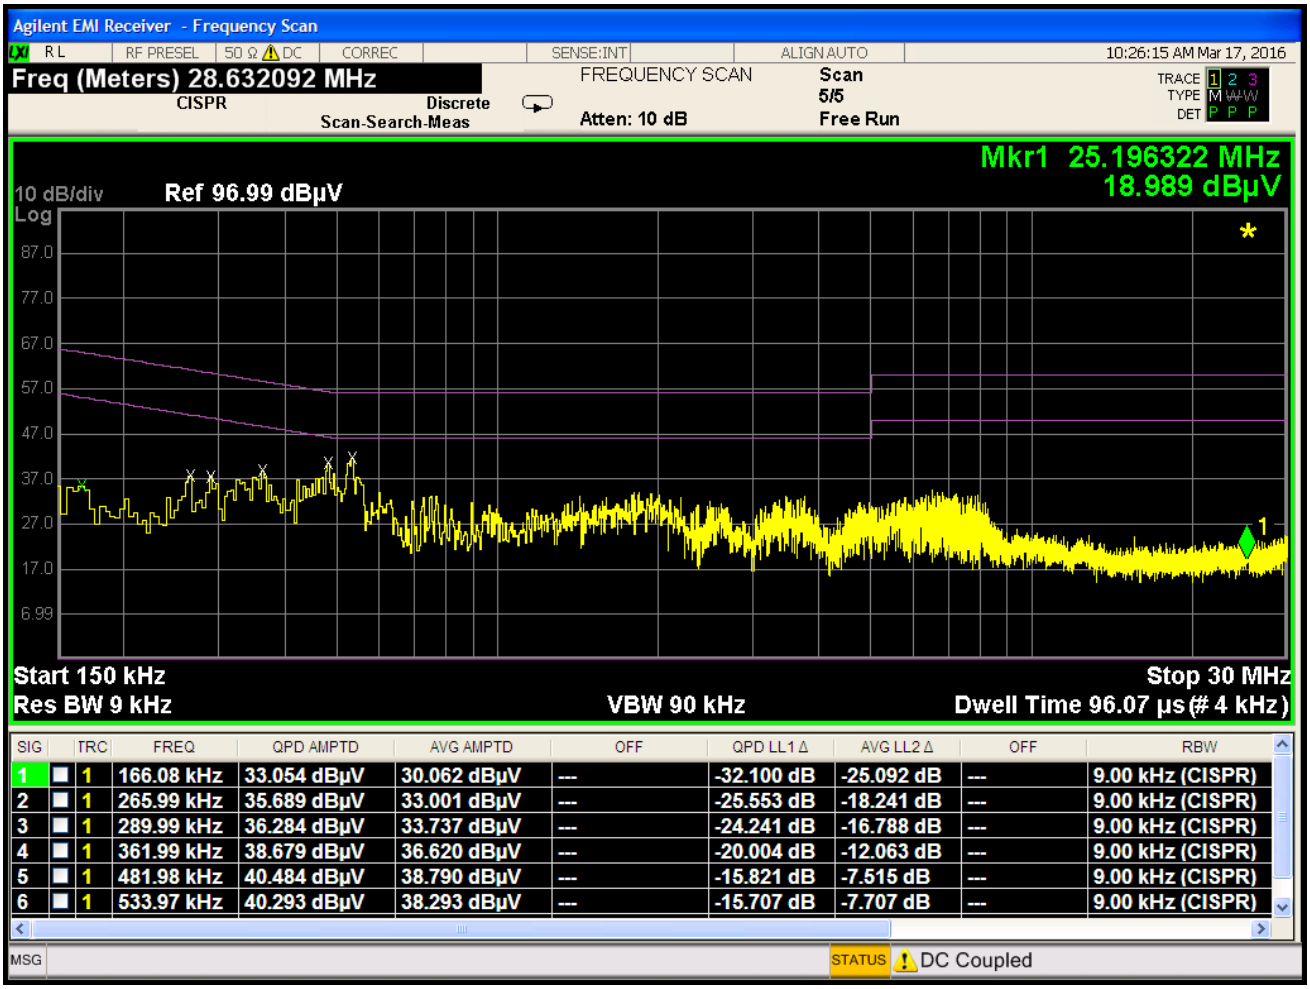

SIG	TRC	FREQ	QPD AMPTD	AVG AMPTD	OFF	QPD LL1 Δ	AVG LL2 Δ	OFF	RBW
1	1	166.08 kHz	33.054 dBµV	30.062 dBµV	---	-32.100 dB	-25.092 dB	---	9.00 kHz (CISPR)
2	1	265.99 kHz	35.689 dBµV	33.001 dBµV	---	-25.553 dB	-18.241 dB	---	9.00 kHz (CISPR)
3	1	289.99 kHz	36.284 dBµV	33.737 dBµV	---	-24.241 dB	-16.788 dB	---	9.00 kHz (CISPR)
4	1	361.99 kHz	38.679 dBµV	36.620 dBµV	---	-20.004 dB	-12.063 dB	---	9.00 kHz (CISPR)
5	1	481.98 kHz	40.484 dBµV	38.790 dBµV	---	-15.821 dB	-7.515 dB	---	9.00 kHz (CISPR)
6	1	533.97 kHz	40.293 dBµV	38.293 dBµV	---	-15.707 dB	-7.707 dB	---	9.00 kHz (CISPR)

Plot 7-226. Line Conducted Plot with 802.11a UNII Band 1 (L1)

© 2016 PCTEST Engineering Laboratory, Inc.

Line-Conducted Test Data

§15.407

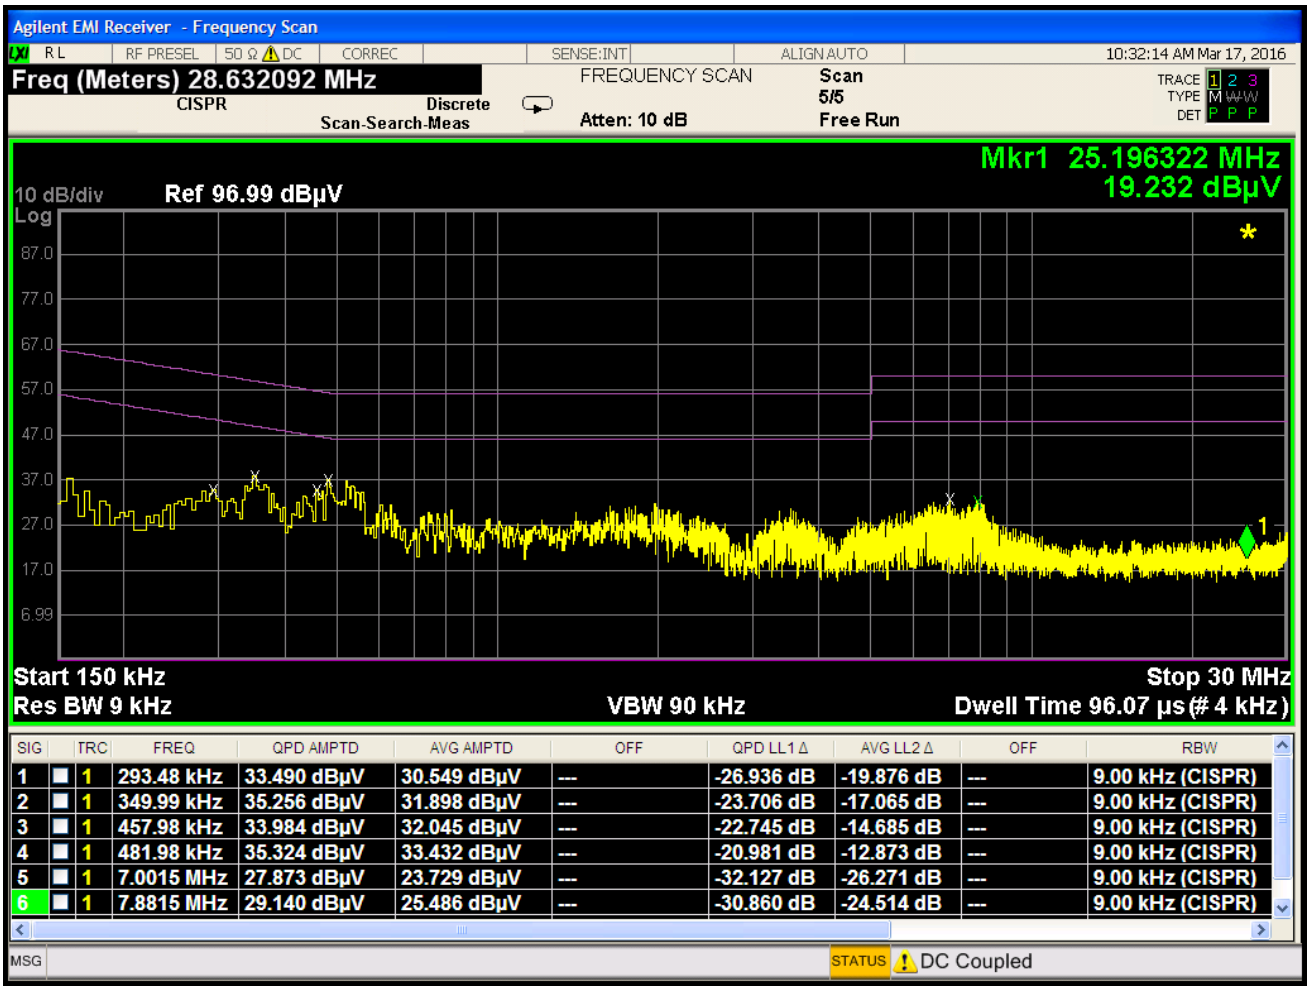

SIG		TRC	FREQ	QPD AMPTD	AVG AMPTD	OFF	QPD LL1 Δ	AVG LL2 Δ	OFF	RBW
1	■	1	293.48 kHz	33.490 dBµV	30.549 dBµV	---	-26.936 dB	-19.876 dB	---	9.00 kHz (CISPR)
2	■	1	349.99 kHz	35.256 dBµV	31.898 dBµV	---	-23.706 dB	-17.065 dB	---	9.00 kHz (CISPR)
3	■	1	457.98 kHz	33.984 dBµV	32.045 dBµV	---	-22.745 dB	-14.685 dB	---	9.00 kHz (CISPR)
4	■	1	481.98 kHz	35.324 dBµV	33.432 dBµV	---	-20.981 dB	-12.873 dB	---	9.00 kHz (CISPR)
5	■	1	7.0015 MHz	27.873 dBµV	23.729 dBµV	---	-32.127 dB	-26.271 dB	---	9.00 kHz (CISPR)
6	■	1	7.8815 MHz	29.140 dBµV	25.486 dBµV	---	-30.860 dB	-24.514 dB	---	9.00 kHz (CISPR)

Plot 7-227. Line Conducted Plot with 802.11a UNII Band 1 (N)

© 2016 PCTEST Engineering Laboratory, Inc.

Line-Conducted Test Data

§15.407

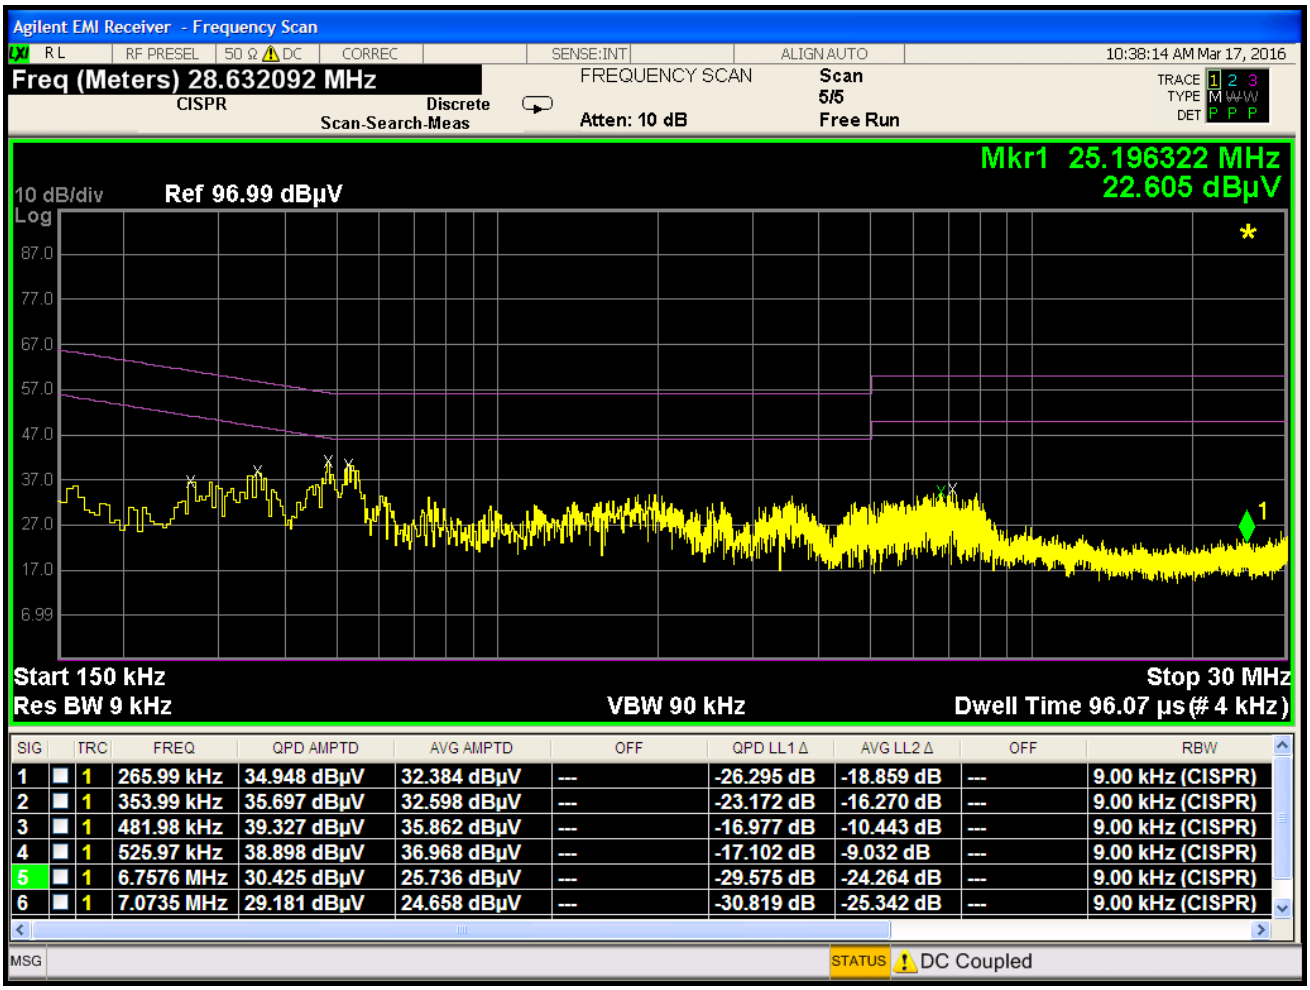

SIG		TRC	FREQ	QPD AMPTD	AVG AMPTD	OFF	QPD LL1 Δ	AVG LL2 Δ	OFF	RBW
1	■	1	265.99 kHz	34.948 dBµV	32.384 dBµV	---	-26.295 dB	-18.859 dB	---	9.00 kHz (CISPR)
2	■	1	353.99 kHz	35.697 dBµV	32.598 dBµV	---	-23.172 dB	-16.270 dB	---	9.00 kHz (CISPR)
3	■	1	481.98 kHz	39.327 dBµV	35.862 dBµV	---	-16.977 dB	-10.443 dB	---	9.00 kHz (CISPR)
4	■	1	525.97 kHz	38.898 dBµV	36.968 dBµV	---	-17.102 dB	-9.032 dB	---	9.00 kHz (CISPR)
5	■	1	6.7576 MHz	30.425 dBµV	25.736 dBµV	---	-29.575 dB	-24.264 dB	---	9.00 kHz (CISPR)
6	■	1	7.0735 MHz	29.181 dBµV	24.658 dBµV	---	-30.819 dB	-25.342 dB	---	9.00 kHz (CISPR)

Plot 7-228. Line Conducted Plot with 802.11a UNII Band 2A (L1)

© 2016 PCTEST Engineering Laboratory, Inc.

Line-Conducted Test Data

§15.407

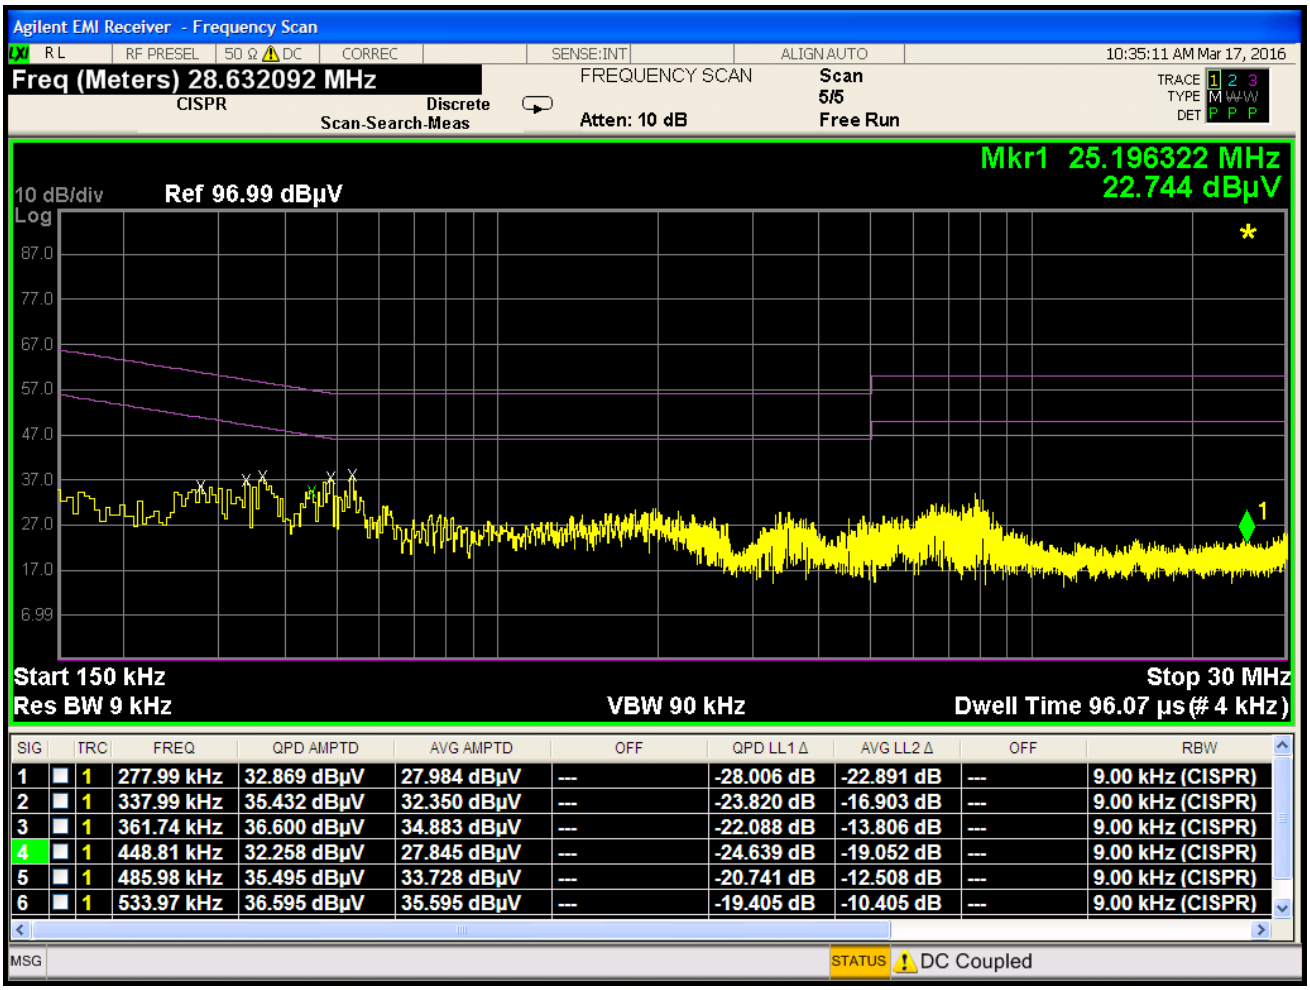

SIG		TRC	FREQ	QPD AMPTD	AVG AMPTD	OFF	QPD LL1 Δ	AVG LL2 Δ	OFF	RBW
1	■	1	277.99 kHz	32.869 dBµV	27.984 dBµV	---	-28.006 dB	-22.891 dB	---	9.00 kHz (CISPR)
2	■	1	337.99 kHz	35.432 dBµV	32.350 dBµV	---	-23.820 dB	-16.903 dB	---	9.00 kHz (CISPR)
3	■	1	361.74 kHz	36.600 dBµV	34.883 dBµV	---	-22.088 dB	-13.806 dB	---	9.00 kHz (CISPR)
4	■	1	448.81 kHz	32.258 dBµV	27.845 dBµV	---	-24.639 dB	-19.052 dB	---	9.00 kHz (CISPR)
5	■	1	485.98 kHz	35.495 dBµV	33.728 dBµV	---	-20.741 dB	-12.508 dB	---	9.00 kHz (CISPR)
6	■	1	533.97 kHz	36.595 dBµV	35.595 dBµV	---	-19.405 dB	-10.405 dB	---	9.00 kHz (CISPR)

Plot 7-229. Line Conducted Plot with 802.11a UNII Band 2A (N)

© 2016 PCTEST Engineering Laboratory, Inc.

Line-Conducted Test Data

§15.407

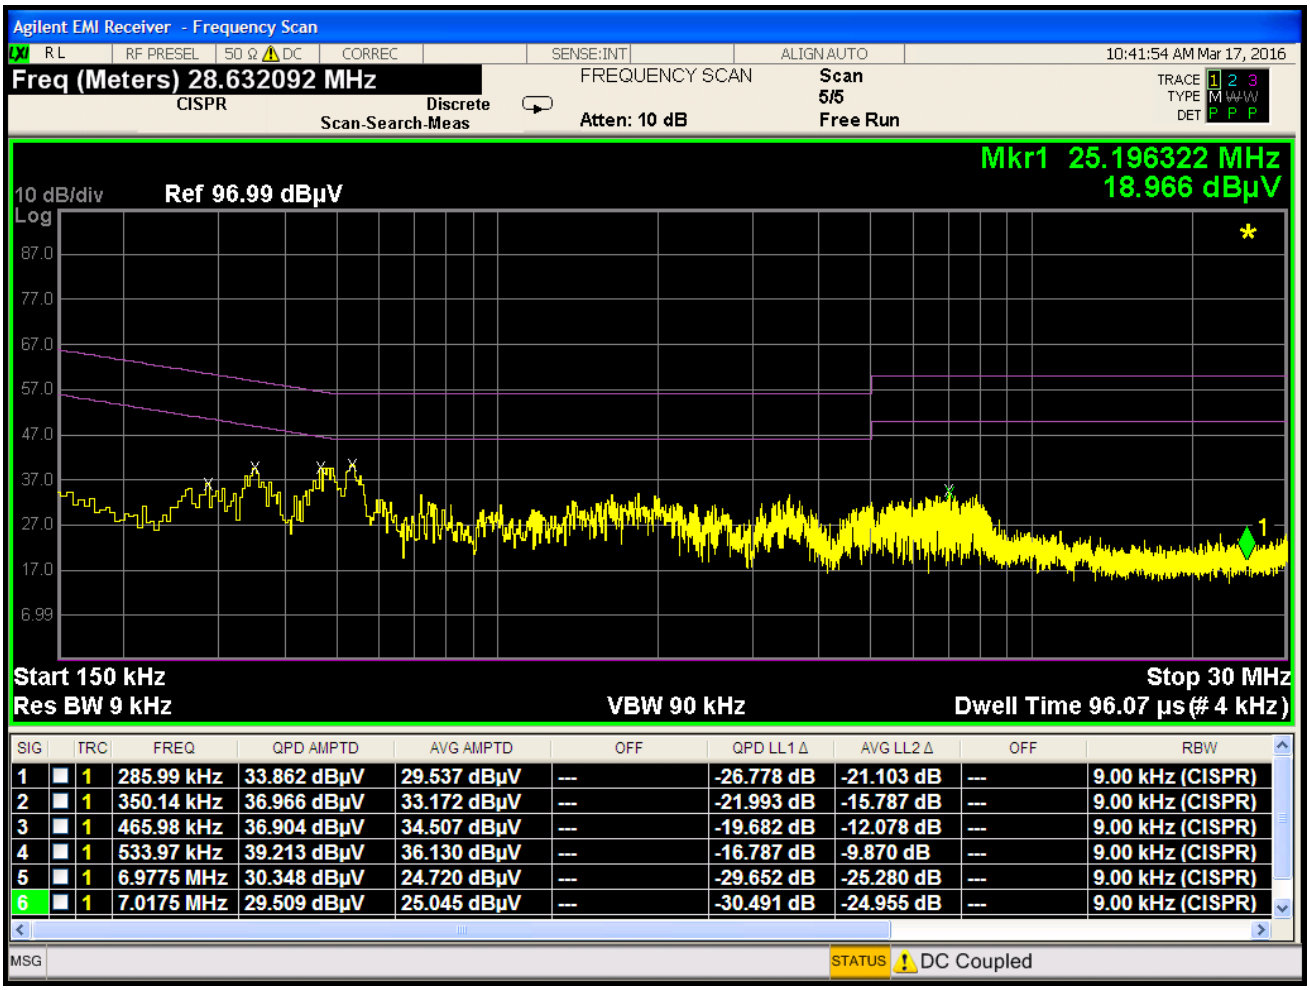

SIG		TRC	FREQ	QPD AMPTD	AVG AMPTD	OFF	QPD LL1 Δ	AVG LL2 Δ	OFF	RBW
1	■	1	285.99 kHz	33.862 dBµV	29.537 dBµV	---	-26.778 dB	-21.103 dB	---	9.00 kHz (CISPR)
2	■	1	350.14 kHz	36.966 dBµV	33.172 dBµV	---	-21.993 dB	-15.787 dB	---	9.00 kHz (CISPR)
3	■	1	465.98 kHz	36.904 dBµV	34.507 dBµV	---	-19.682 dB	-12.078 dB	---	9.00 kHz (CISPR)
4	■	1	533.97 kHz	39.213 dBµV	36.130 dBµV	---	-16.787 dB	-9.870 dB	---	9.00 kHz (CISPR)
5	■	1	6.9775 MHz	30.348 dBµV	24.720 dBµV	---	-29.652 dB	-25.280 dB	---	9.00 kHz (CISPR)
6	■	1	7.0175 MHz	29.509 dBµV	25.045 dBµV	---	-30.491 dB	-24.955 dB	---	9.00 kHz (CISPR)

Plot 7-230. Line Conducted Plot with 802.11a UNII Band 2C (L1)

© 2016 PCTEST Engineering Laboratory, Inc.

Line-Conducted Test Data

§15.407

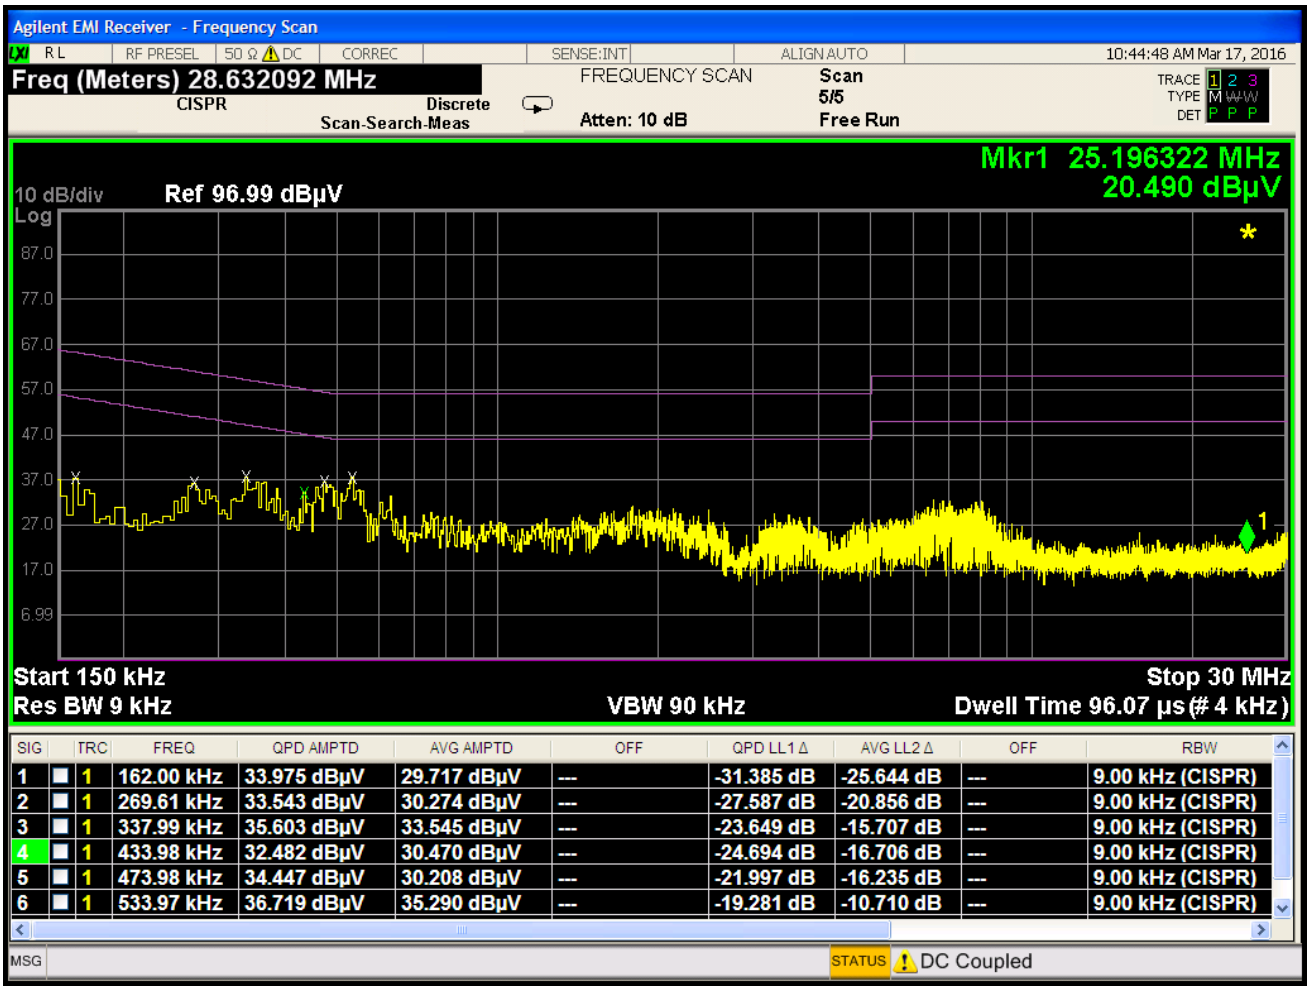

SIG		TRC	FREQ	QPD AMPTD	AVG AMPTD	OFF	QPD LL1 Δ	AVG LL2 Δ	OFF	RBW
1		1	162.00 kHz	33.975 dBµV	29.717 dBµV	---	-31.385 dB	-25.644 dB	---	9.00 kHz (CISPR)
2		1	269.61 kHz	33.543 dBµV	30.274 dBµV	---	-27.587 dB	-20.856 dB	---	9.00 kHz (CISPR)
3		1	337.99 kHz	35.603 dBµV	33.545 dBµV	---	-23.649 dB	-15.707 dB	---	9.00 kHz (CISPR)
4		1	433.98 kHz	32.482 dBµV	30.470 dBµV	---	-24.694 dB	-16.706 dB	---	9.00 kHz (CISPR)
5		1	473.98 kHz	34.447 dBµV	30.208 dBµV	---	-21.997 dB	-16.235 dB	---	9.00 kHz (CISPR)
6		1	533.97 kHz	36.719 dBµV	35.290 dBµV	---	-19.281 dB	-10.710 dB	---	9.00 kHz (CISPR)

Plot 7-231. Line Conducted Plot with 802.11a UNII Band 2C (N)

© 2016 PCTEST Engineering Laboratory, Inc.

Line-Conducted Test Data

§15.407

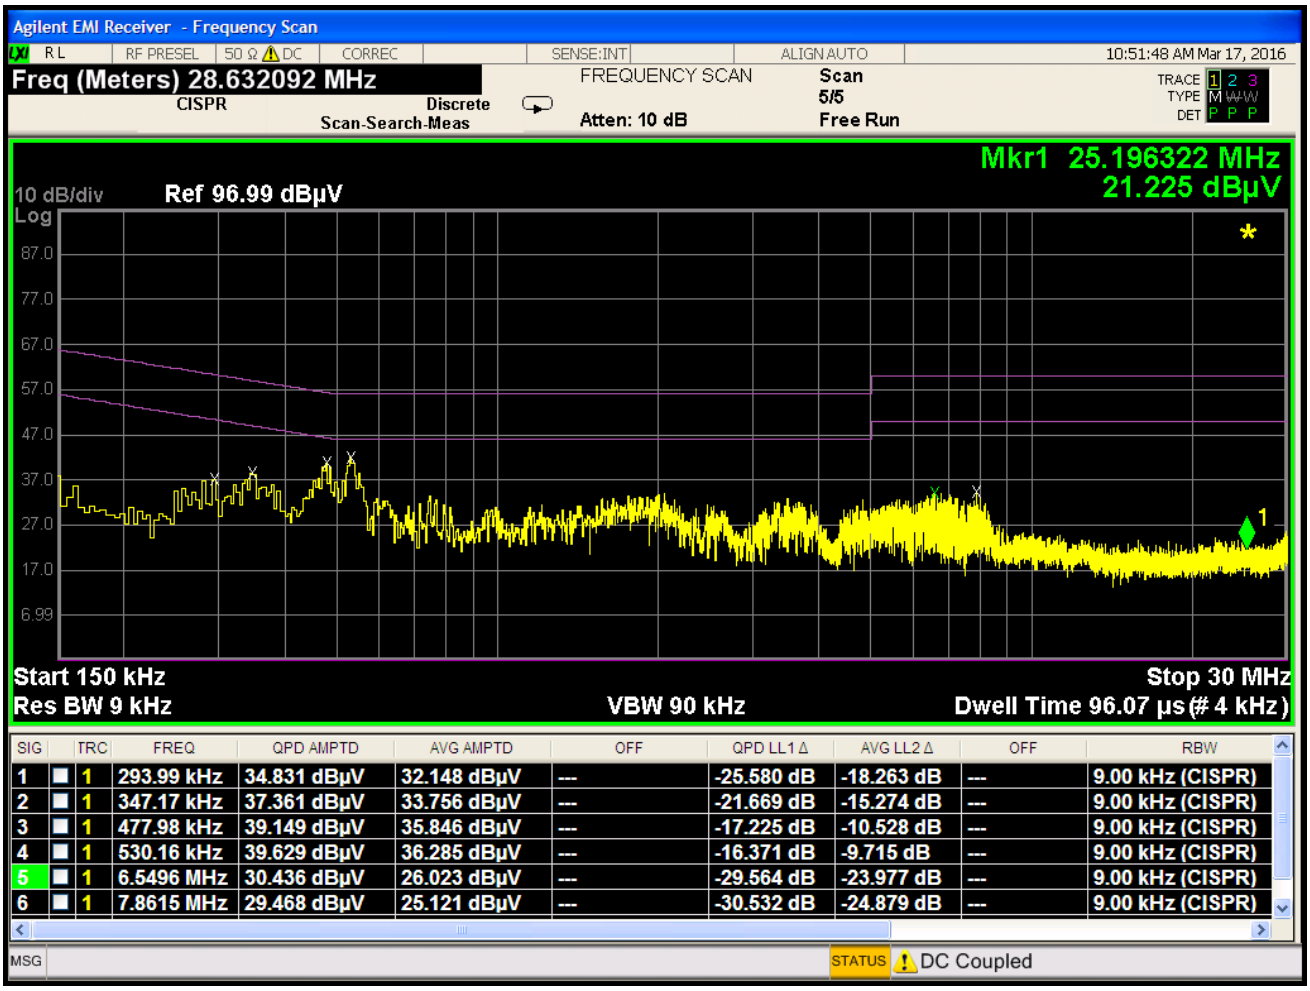

SIG	TRC	FREQ	QPD AMPTD	AVG AMPTD	OFF	QPD LL1 Δ	AVG LL2 Δ	OFF	RBW
1	1	293.99 kHz	34.831 dBµV	32.148 dBµV	---	-25.580 dB	-18.263 dB	---	9.00 kHz (CISPR)
2	1	347.17 kHz	37.361 dBµV	33.756 dBµV	---	-21.669 dB	-15.274 dB	---	9.00 kHz (CISPR)
3	1	477.98 kHz	39.149 dBµV	35.846 dBµV	---	-17.225 dB	-10.528 dB	---	9.00 kHz (CISPR)
4	1	530.16 kHz	39.629 dBµV	36.285 dBµV	---	-16.371 dB	-9.715 dB	---	9.00 kHz (CISPR)
5	1	6.5496 MHz	30.436 dBµV	26.023 dBµV	---	-29.564 dB	-23.977 dB	---	9.00 kHz (CISPR)
6	1	7.8615 MHz	29.468 dBµV	25.121 dBµV	---	-30.532 dB	-24.879 dB	---	9.00 kHz (CISPR)

Plot 7-232. Line Conducted Plot with 802.11a UNII Band 3 (L1)

© 2016 PCTEST Engineering Laboratory, Inc.

Line-Conducted Test Data

§15.407

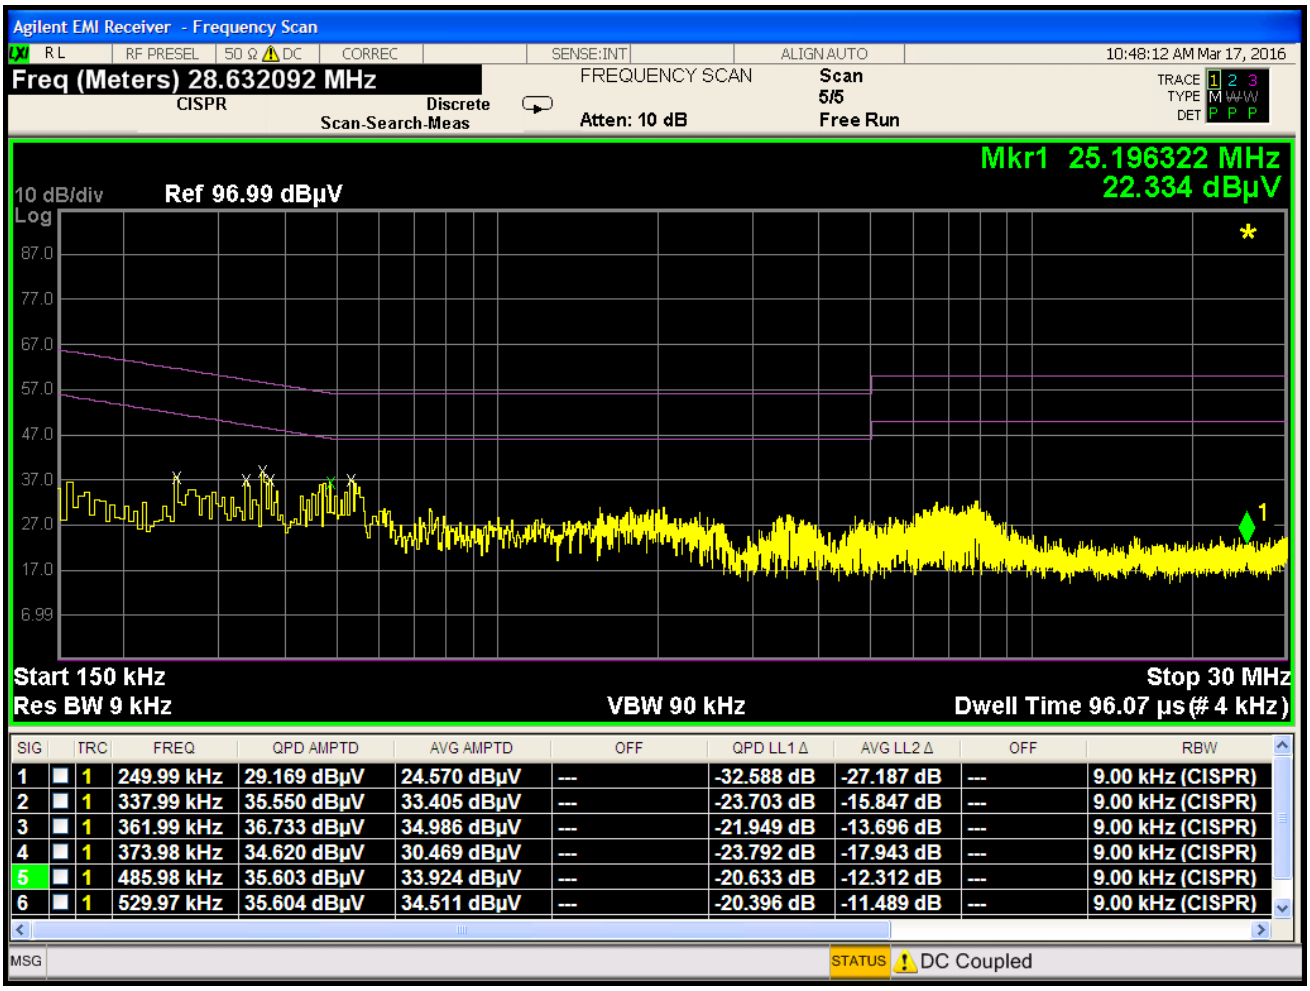

SIG	TRC	FREQ	QPD AMPTD	AVG AMPTD	OFF	QPD LL1 Δ	AVG LL2 Δ	OFF	RBW
1	1	249.99 kHz	29.169 dBµV	24.570 dBµV	---	-32.588 dB	-27.187 dB	---	9.00 kHz (CISPR)
2	1	337.99 kHz	35.550 dBµV	33.405 dBµV	---	-23.703 dB	-15.847 dB	---	9.00 kHz (CISPR)
3	1	361.99 kHz	36.733 dBµV	34.986 dBµV	---	-21.949 dB	-13.696 dB	---	9.00 kHz (CISPR)
4	1	373.98 kHz	34.620 dBµV	30.469 dBµV	---	-23.792 dB	-17.943 dB	---	9.00 kHz (CISPR)
5	1	485.98 kHz	35.603 dBµV	33.924 dBµV	---	-20.633 dB	-12.312 dB	---	9.00 kHz (CISPR)
6	1	529.97 kHz	35.604 dBµV	34.511 dBµV	---	-20.396 dB	-11.489 dB	---	9.00 kHz (CISPR)

Plot 7-233. Line Conducted Plot with 802.11a UNII Band 3 (N)

© 2016 PCTEST Engineering Laboratory, Inc.

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Tablet FCC ID: A3LSMT713** is in compliance with Part 15E of the FCC Rules.

© 2016 PCTEST Engineering Laboratory, Inc.