



FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E
FCC CFR47 PART 27 SUBPART M

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE Tablet + Bluetooth/BLE and DTS/UNII a/b/g/n/ac and ANT+

MODEL NUMBER : SM-T715C

FCC ID: A3LSMT715C

REPORT NUMBER: 15K20542-E6

ISSUE DATE: MAY 30, 2015

Prepared for
SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 443-742, KOREA

Prepared by
UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 443-823, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	05/23/15	Initial issue	CY Choi
A	05/30/15	Revised Form of Summary Table at page 12	CY Choi

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY.....	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT	7
5.2. MAXIMUM OUTPUT POWER (GSM)	7
5.3. MAXIMUM OUTPUT POWER (WCDMA)	7
5.4. MAXIMUM OUTPUT POWER (LTE).....	8
5.5. DESCRIPTION OF AVAILABLE ANTENNAS	8
5.6. DESCRIPTION OF TEST SETUP.....	8
6. TEST AND MEASUREMENT EQUIPMENT	11
7. Summary Table	12
8. RF POWER OUTPUT VERIFICATION	13
8.1. GSM/GPRS/EDGE	13
8.1.1. GSM OUTPUT POWER RESULT.....	14
8.2. UMTS REL 99.....	16
8.2.1. WCDMA OUTPUT POWER RESULT	20
8.3. LTE OUTPUT VERIFICATION.....	22
8.3.1. LTE OUTPUT POWER RESULT	23
9. PEAK TO AVERAGE RATIO	24
9.1. CONDUCTED PEAK TO AVERAGE RESULT.....	24
9.2. CONDUCTED PEAK TO AVERAGE PLOTS.....	25
10. LIMITS AND CONDUCTED RESULTS.....	27
10.1. OCCUPIED BANDWIDTH.....	27
10.1.1. OCCUPIED BANDWIDTH RESULTS.....	27
10.1.2. OCCUPIED BANDWIDTH PLOTS	29
10.2. BAND EDGE EMISSIONS	37
10.2.1. BAND EDGE PLOTS	41

10.3.	OUT OF BAND EMISSIONS	43
10.3.1.	OUT OF BAND EMISSIONS RESULT	47
10.3.2.	OUT OF BAND EMISSIONS PLOTS.....	49
10.1.	FREQUENCY STABILITY	57
10.1.1.	FREQUENCY STABILITY RESULTS.....	58
11.	RADIATED TEST RESULTS	61
11.1.	RADIATED POWER (ERP & EIRP).....	61
11.1.1.	ERP/EIRP Results.....	62
11.1.2.	ERP/EIRP DATA.....	64
11.2.	FIELD STRENGTH OF SPURIOUS RADIATION	72
11.2.1.	SPURIOUS RADIATION PLOTS.....	73
12.	SETUP PHOTOS	81

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM/WCDMA/LTE Tablet+ Bluetooth/BLE, DTS/UNII a/b/g/n/ac and ANT+
MODEL NUMBER: SM-T715C
SERIAL NUMBER: R32G301D6ER (RADIATED); R32G301D6ER (CONDUCTED)
DATE TESTED: APRIL 16 - MAY 21, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H, 24E, 27	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:

Tested By:



Ji Ho Choi
Suwon Lab Manager
UL Korea, Ltd.

CY Choi
Suwon Lab Engineer
UL Korea, Ltd.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 22, FCC CFR Part 24 and FCC CFR Part 27.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-823, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro
☒ Chamber 1
☐ Chamber 2

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\text{EIRP} = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)} + \text{Substitution Antenna Factor (dBi)}$$

$$\text{ERP} = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)}$$

(Path loss = Signal generator output – PSA reading with substitution antenna)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	4.14 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Tablet + Bluetooth/BLE, DTS/UNII a/b/g/n/ac and ANT+.

5.2. MAXIMUM OUTPUT POWER (GSM)

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/24						
Band	Frequency Range [MHz]	Modulation Peak	Conducted		Radiated	
			Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
GSM850	824~849	GMSK	32.36	1722.20		
		GPRS	32.37	1724.73	27.78	599.79
		EGPRS	26.88	487.77	21.93	155.96
GSM1900	1850~1910	GMSK	29.28	846.42		
		GPRS	29.34	859.76	31.11	1291.22
		EGPRS	26.37	434.00	28.68	737.90

5.3. MAXIMUM OUTPUT POWER (WCDMA)

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/24						
Band	Frequency Range [MHz]	Modulation Peak	Conducted		Radiated	
			Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
Band 5	824~849	REL99	22.60	181.86	14.72	29.65
		HSDPA	23.00	199.53	14.02	25.23
		HSUPA	23.00	199.53		
		DC-HSDPA	23.00	199.36		
Band 2	1850~1910	REL99	23.00	199.53	23.58	228.03
		HSDPA	23.18	207.96	22.82	191.43
		HSUPA	23.00	199.53		
		DC-HSDPA	23.23	210.22		

5.4. MAXIMUM OUTPUT POWER (LTE)

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

LTE Band 41

FCC Part 27							
Band	Frequency Range [MHz]	BandWidth [MHz]	Modulation Peak	Conducted		Radiated	
				Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
Band 41	2555~2655	20MHz	QPSK	23.87	243.52	19.39	86.90
			16QAM	22.91	195.66	18.39	69.02
		15MHz	QPSK	23.83	241.71	18.59	72.28
			16QAM	23.00	199.53	17.54	56.75
		10MHz	QPSK	23.75	237.02	18.98	79.07
			16QAM	22.77	189.03	18.06	63.97
		5MHz	QPSK	23.76	237.90	18.88	77.27
			16QAM	22.75	188.46	17.20	52.48

DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a FPCB antenna for the [List the bands supported] with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
GSM 850 / WCDMA Band 5 824 ~ 849 MHz	0.12
GSM 1900 / WCDMA Band 2 1850 ~ 1910 MHz	-1.28
LTE Band 41 2496 ~ 2690 MHz	-1.03

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA12EWE	N/A	N/A
Data Cable	SAMSUNG	ECB-DG925UWE	N/A	N/A
Earphone	SAMSUNG	GH59-11129H	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	0.8m	N/A
2	Audio	1	Mini-Jack	Unshielded	1.0m	N/A


TEST SETUP

The EUT is continuously communicated to the call box during the tests.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

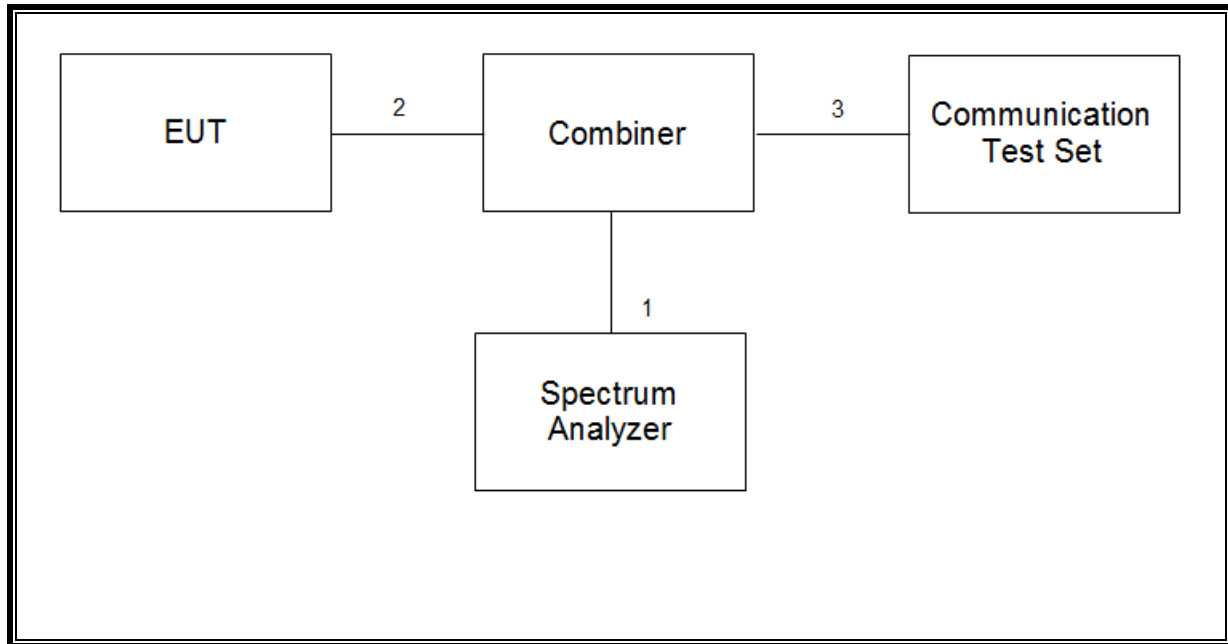

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

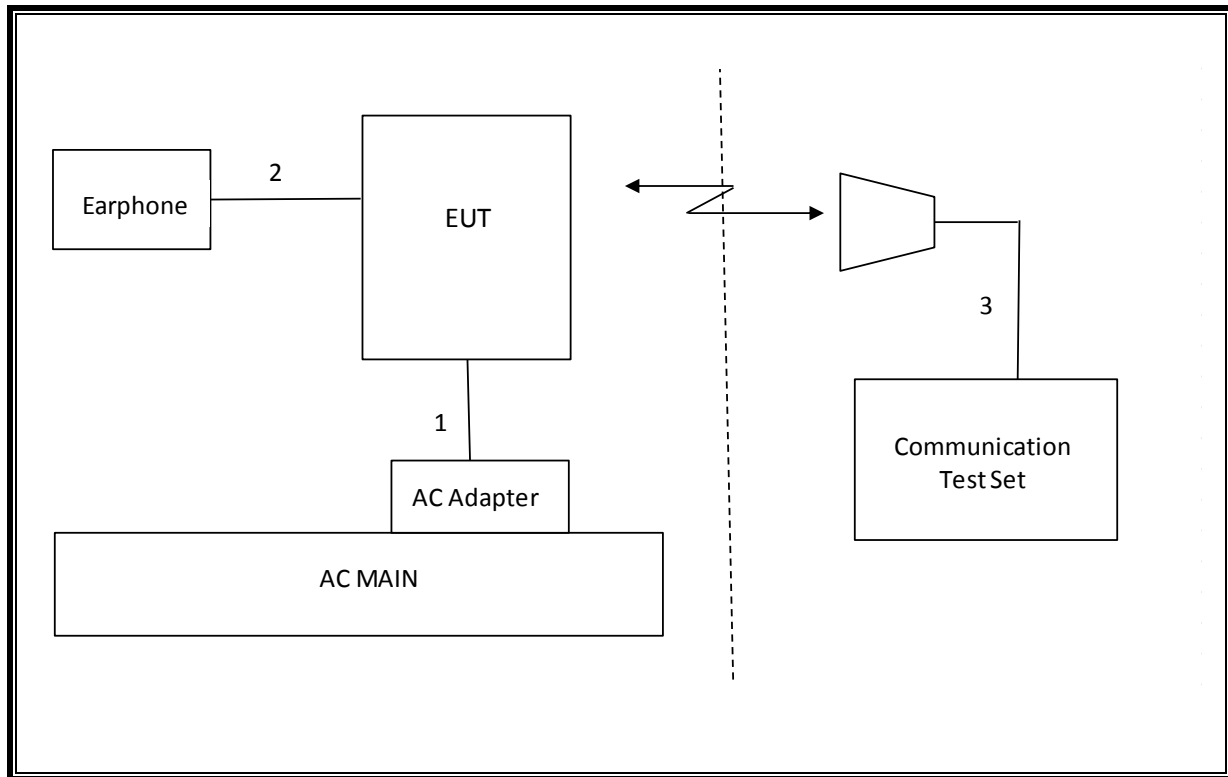

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Tuned Dipole 400~1000 MHz	ETS	3121D DB4	00164753	07-29-15
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	950	11-17-15
Antenna, Horn, 18 GHz	ETS	3115	00167211	09-20-15
Antenna, Horn, 40 GHz	ETS	3116C	00166255	09-23-15
Antenna, Horn, 40 GHz	ETS	3116C-PA	00168841	09-29-15
Preamplifier, 1000 MHz	Sonoma	310N	341282	11-17-15
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	11-18-15
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	09-23-15
Communications Test Set	R&S	CMW500	150312	08-13-15
Average Power Sensor	R&S	NRZ-Z91	102681	11-17-15
Average Power Sensor	Agilent / HP	U2000	MY54270007	09-23-15
EMI Test Receive, 40 GHz	R&S	ESU40	100439	11-17-15
EMI Test Receive, 3 GHz	R&S	ESR3	101832	11-17-15
Attenuator / Switch driver	HP	11713A	3748A04272	N/A
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	009	11-17-15
High Pass Filter 5GHz	Micro-Tronics	HPS17542	009	11-17-15
High Pass Filter 6GHz	Micro-Tronics	HPM17543	010	11-17-15
Combiner	WEINSCHTEL	1575	2153	11-17-15
Temperature Chamber	ESPEC	SH-642	93001109	11-13-15
DC Power Supply	Agilent / HP	E3640A	MY54226395	09-23-15

7. Summary Table

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result	Note
2.1049	Occupied Band width (99%)	N/A	Conducted	Pass	17.845 MHz
22.917(a) 24.238(a)	Band Edge / Conducted Spurious Emission	-13dBm		Pass	-22.43 dBm
27.53(m)	Conducted Spurious Emission	-25dBm		Pass	-28.83 dBm
27.53(m)	Emission Mask	-		Pass	-19.08 dBm
2.1046	Conducted output power	N/A		Pass	32.37 dBm
22.355 24.235 27.54	Frequency Stability	2.5PPM		Pass	0.055PPM
22.913(a)(2)	Effective Radiated Power	38 dBm	Radiated	Pass	27.78 dBm
24.232(c) 27.50(h)(2)	Equivalent Isotropic Radiated Power	33dBm		Pass	31.11 dBm
22.917(a) 24.238(a)	Radiated Spurious Emission	-13dBm		Pass	-32.8 dBm
27.53(m)	Radiated Spurious Emission	-25dBm		Pass	-28.2 dBm

FCC Rule Part	Frequency Range [MHz]	Output Power [W]	Frequency Tolerance	Emission Designator	Emission Bandwidth [MHz]	Communication Type
GSM						
22H	824.2 - 848.8	0.6	2.5 ppm	242KGXW		GSM850
22H	824.2 - 848.8	0.156	2.5 ppm	244KG7W		EDGE850
24E	1850.2 - 1909.8	1.291	2.5 ppm	244KGXW		GSM1900
24E	1850.2 - 1909.8	0.738	2.5 ppm	247KG7W		EDGE1900
WCDMA						
22H	826.4 - 846.6	0.03	2.5 ppm	4M15F9W		WCDMA
24E	1852.4 - 1907.6	0.228	2.5 ppm	4M15F9W		WCDMA
LTE Band 41						
22M	829.0 - 844.0	0.087	2.5 ppm	17M8G7D	20	QPSK
22M	829.0 - 844.0	0.069	2.5 ppm	17M8D7W	20	16QAM
22M	826.5 - 846.5	0.072	2.5 ppm	13M4G7D	15	QPSK
22M	826.5 - 846.5	0.057	2.5 ppm	13M4D7W	15	16QAM
22M	825.5 - 847.5	0.079	2.5 ppm	9M00G7D	10	QPSK
22M	825.5 - 847.5	0.064	2.5 ppm	8M99D7W	10	16QAM
22M	824.7 - 848.3	0.077	2.5 ppm	4M49G7D	5	QPSK
22M	824.7 - 848.3	0.052	2.5 ppm	4M49D7W	5	16QAM

8. RF POWER OUTPUT VERIFICATION

8.1. GSM/GPRS/EDGE

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900
Press Connection control to choose the different menus
Press RESET > choose all to reset all settings
Connection Press Signal Off to turn off the signal and change settings
Network Support > GSM+GPRS or GSM+EGPRS
Main Service > Packet Data
Service selection > Test Mode A – Auto Slot Config. off
MS Signal Press Slot Config bottom on the right twice to select and change the number of time slots and power setting
 > Slot configuration > Uplink/Gamma
 > 33 dBm for GPRS 850/900
 > 30 dBm for GPRS1800/1900
BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel
Frequency Offset > + 0 Hz
Mode > BCCH and TCH
BCCH Level > -85 dBm (May need to adjust if link is not stable)
BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]
Channel Type > Off
P0> 4 dB
Slot Config > Unchanged (if already set under MS Signal)
TCH > choose desired test channel
Hopping > Off
Main Timeslot > 3 (Default)
Network Coding Scheme > CS4 (GPRS) and MCS5 ~ MCS9 (EGPRS)
Bit Stream > 2E9-1PSR Bit Pattern
AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input
Connection Press Signal On to turn on the signal and change settings

8.1.1. GSM OUTPUT POWER RESULT

GSM850 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. [MHz]	Max. Power	
						Burst Pwr [dBm]	Frame Pwr [dBm]
850	GSM (Voice)	CS1	1	128	824.2	32.36	23.33
				190	836.6	32.30	23.27
				251	848.8	32.33	23.30
	GPRS (GMSK)	CS1	1	128	824.2	32.31	23.27
				190	836.6	32.34	23.31
				251	848.8	32.37	23.34
			2	128	824.2	30.73	24.71
				190	836.6	30.65	24.63
				251	848.8	30.95	24.93
			3	128	824.2	29.12	24.86
				190	836.6	29.04	24.78
				251	848.8	29.16	24.90
			4	128	824.2	26.82	23.81
				190	836.6	26.76	23.75
				251	848.8	26.89	23.88
	EGPRS (8PSK)	MCS5	1	128	824.2	26.78	17.75
				190	836.6	26.72	17.69
				251	848.8	26.88	17.85
			2	128	824.2	25.22	19.20
				190	836.6	25.15	19.13
				251	848.8	25.32	19.30
			3	128	824.2	24.26	20.00
				190	836.6	24.20	19.94
				251	848.8	24.37	20.11
			4	128	824.2	22.40	19.39
				190	836.6	22.33	19.32
				251	848.8	22.50	19.49

GSM1900 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. [MHz]	Max. Power	
						Burst Pwr [dBm]	Frame Pwr [dBm]
1900	GSM (Voice)	CS1	1	512	1850.2	29.20	20.17
				661	1880.0	29.28	20.24
				810	1909.8	29.21	20.18
	GPRS (GMSK)	CS1	1	512	1850.2	29.26	20.23
				661	1880.0	29.34	20.31
				810	1909.8	29.29	20.26
			2	512	1850.2	27.81	21.79
				661	1880.0	27.99	21.97
				810	1909.8	27.84	21.82
			3	512	1850.2	26.03	21.77
				661	1880.0	26.20	21.94
				810	1909.8	26.30	22.04
			4	512	1850.2	24.00	20.99
				661	1880.0	24.16	21.15
				810	1909.8	24.27	21.26
	EGPRS (8PSK)	MCS5	1	512	1850.2	26.16	17.13
				661	1880.0	26.33	17.30
				810	1909.8	26.37	17.34
			2	512	1850.2	24.79	18.77
				661	1880.0	24.86	18.84
				810	1909.8	25.00	18.98
			3	512	1850.2	23.77	19.51
				661	1880.0	23.93	19.67
				810	1909.8	24.00	19.74
			4	512	1850.2	22.12	19.11
				661	1880.0	22.29	19.28
				810	1909.8	22.39	19.38

8.2. UMTS REL 99

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 7 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	15/1
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15	56/75	47/15
HSDPA Specific Settings	CM (dB)	1	3	2	3	1
	MPR (dB)	0	2	1	2	0
	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
HSUPA Specific Settings	CQI Repetition Factor (Table 5.2B.4)	2				
	$A_{hs} = \beta_{hs}/\beta_c$	30/15				
	E-DPDCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
	Reference E-TFCI PO	27	27	27	27	27
	Maximum Channelisation Codes	2xSF2				SF4

DC-HSDPA Setup Procedures used to establish the test signals

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

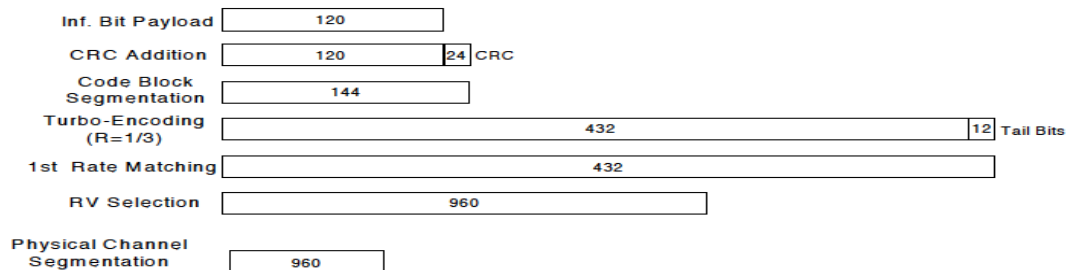


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs} / \beta_c$	30/15			

HSPA+

Since 16QAM is not used for uplink, the uplink Category and release is same as HSUPA, i.e., CAT 6 Rel 6. Therefore, the RF conducted power is not measured.

8.2.1. WCDMA OUTPUT POWER RESULT

WCDMA Band 5 Measured Results

Band	Mode		UL Ch No.	Freq. [MHz]	MPR [dB]	Avg Pwr [dBm]
W-CDMA Band V	Rel 99	RMC, 12.2 kbps	4132	826.4	0	22.60
			4183	836.6	0	22.58
			4233	846.6	0	22.50
	HSDPA	Subtest 1	4132	826.4	0	22.76
			4183	836.6	0	23.00
			4233	846.6	0	22.56
		Subtest 2	4132	826.4	0	21.88
			4183	836.6	0	22.22
			4233	846.6	0	21.74
		Subtest 3	4132	826.4	0.5	21.21
			4183	836.6	0.5	22.27
			4233	846.6	0.5	21.79
		Subtest 4	4132	826.4	0.5	21.09
			4183	836.6	0.5	21.36
			4233	846.6	0.5	20.94
	HSUPA	Subtest 1	4132	826.4	0	21.56
			4183	836.6	0	22.29
			4233	846.6	0	21.81
		Subtest 2	4132	826.4	2	20.17
			4183	836.6	2	20.44
			4233	846.6	2	20.03
		Subtest 3	4132	826.4	1	20.60
			4183	836.6	1	21.34
			4233	846.6	1	20.91
		Subtest 4	4132	826.4	2	19.69
			4183	836.6	2	20.38
			4233	846.6	2	19.98
		Subtest 5	4132	826.4	0	22.77
			4183	836.6	0	23.00
			4233	846.6	0	22.59
	DC-HSDPA	Subtest 1	4132	826.4	0	22.72
			4183	836.6	0	23.00
			4233	846.6	0	22.48
		Subtest 2	4132	826.4	0	21.90
			4183	836.6	0	22.24
			4233	846.6	0	21.75
		Subtest 3	4132	826.4	0.5	21.29
			4183	836.6	0.5	22.29
			4233	846.6	0.5	21.79
		Subtest 4	4132	826.4	0.5	21.08
			4183	836.6	0.5	21.36
			4233	846.6	0.5	20.94

WCDMA Band 2 Measured Results

Band	Mode		UL Ch No.	Freq. [MHz]	MPR [dB]	Avg Pwr [dBm]
W-CDMA Band II	Rel 99	RMC, 12.2 kbps	9262	1852.4	0	22.88
			9400	1880.0	0	23.00
			9538	1907.6	0	23.00
	HSDPA	Subtest 1	9262	1852.4	0	23.00
			9400	1880.0	0	23.00
			9538	1907.6	0	22.65
		Subtest 2	9262	1852.4	0	22.41
			9400	1880.0	0	22.54
			9538	1907.6	0	22.00
		Subtest 3	9262	1852.4	0.5	21.70
			9400	1880.0	0.5	22.50
			9538	1907.6	0.5	22.04
		Subtest 4	9262	1852.4	0.5	21.66
			9400	1880.0	0.5	21.81
			9538	1907.6	0.5	21.34
	HSUPA	Subtest 1	9262	1852.4	0	22.01
			9400	1880.0	0	22.58
			9538	1907.6	0	22.07
		Subtest 2	9262	1852.4	2	20.51
			9400	1880.0	2	20.72
			9538	1907.6	2	20.27
		Subtest 3	9262	1852.4	1	20.99
			9400	1880.0	1	21.62
			9538	1907.6	1	21.14
		Subtest 4	9262	1852.4	2	19.97
			9400	1880.0	2	20.69
			9538	1907.6	2	20.23
		Subtest 5	9262	1852.4	0	23.00
			9400	1880.0	0	23.00
			9538	1907.6	0	22.59
	DC-HSDPA	Subtest 1	9262	1852.4	0	23.00
			9400	1880.0	0	23.00
			9538	1907.6	0	22.67
		Subtest 2	9262	1852.4	0	22.37
			9400	1880.0	0	22.57
			9538	1907.6	0	22.06
		Subtest 3	9262	1852.4	0.5	21.71
			9400	1880.0	0.5	22.50
			9538	1907.6	0.5	22.03
		Subtest 4	9262	1852.4	0.5	21.51
			9400	1880.0	0.5	21.72
			9538	1907.6	0.5	21.24

8.3. LTE OUTPUT VERIFICATION

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

8.3.1. LTE OUTPUT POWER RESULT

LTE Band 41 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr [dBm]		
						Max. Power		
						2565 MHz	2593 MHz	2645 MHz
LTE Band 41	20	QPSK	1	0	0	23.26	23.64	22.55
			1	49	0	23.18	23.53	23.87
			1	99	0	23.07	23.58	23.83
			50	0	1	21.96	22.51	22.63
			50	24	1	21.98	22.39	22.68
			50	50	1	21.97	22.47	22.56
		16QAM	100	0	1	21.95	22.41	22.65
			1	0	1	22.29	22.79	22.85
			1	49	1	22.27	22.81	22.91
			1	99	1	22.31	22.75	22.72
			50	0	2	20.92	21.35	21.61
			50	24	2	20.86	21.28	21.63
			50	50	2	20.87	21.26	21.49
			100	0	2	21.00	21.31	21.58
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr [dBm]		
						Max. Power		
						2562.5 MHz	2593 MHz	2647.5 MHz
LTE Band 41	15	QPSK	1	0	0	23.14	23.61	23.81
			1	37	0	23.16	23.55	23.83
			1	74	0	23.14	23.55	23.63
			36	0	1	21.94	22.43	22.70
			36	20	1	21.85	22.47	22.74
			36	39	1	21.95	22.45	22.65
		16QAM	75	0	1	21.95	22.40	22.59
			1	0	1	22.35	22.43	23.00
			1	37	1	22.30	22.48	22.83
			1	74	1	21.94	22.12	22.97
			36	0	2	20.99	21.48	21.60
			36	20	2	20.92	21.39	21.66
			36	39	2	20.92	21.36	21.60
			75	0	2	20.88	21.32	21.59
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr [dBm]		
						Max. Power		
						2560 MHz	2593 MHz	2650 MHz
LTE Band 41	10	QPSK	1	0	0	23.12	23.63	23.75
			1	25	0	23.03	23.58	23.69
			1	49	0	23.09	23.53	23.69
			25	0	1	21.94	22.36	22.64
			25	12	1	21.91	22.47	22.62
			25	25	1	21.86	22.50	22.56
		16QAM	50	0	1	21.89	22.39	22.58
			1	0	1	22.00	22.22	22.77
			1	25	1	21.95	22.15	22.76
			1	49	1	21.99	22.13	22.71
			25	0	2	20.90	21.33	21.63
			25	12	2	20.88	21.44	21.63
			25	25	2	20.84	21.38	21.59
			50	0	2	20.90	21.36	21.57
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr [dBm]		
						Max. Power		
						2557.5 MHz	2593 MHz	2652.5 MHz
LTE Band 41	5	QPSK	1	0	0	23.23	23.66	23.74
			1	12	0	23.13	23.60	23.76
			1	24	0	23.27	23.59	23.71
			12	0	1	22.06	22.36	22.59
			12	7	1	22.07	22.42	22.53
			12	13	1	22.08	22.46	22.50
		16QAM	25	0	1	21.97	22.37	22.57
			1	0	1	22.28	22.57	22.75
			1	12	1	22.16	22.54	22.75
			1	24	1	22.18	22.64	22.71
			12	0	2	21.00	21.32	21.47
			12	7	2	20.93	21.40	21.43
			12	13	2	20.94	21.38	21.41
			25	0	2	20.99	21.48	21.47

9. PEAK TO AVERAGE RATIO

Test Procedure

Per KDB 971168 D01 Power Meas License Digital Systems v02r02;

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The PAR were measured on the Spectrum Analyzer.

Test Spec

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

9.1. CONDUCTED PEAK TO AVERAGE RESULT

GSM

Band	Channel	f [MHz]	Mode	Ratio [dB]	Limit [dB]
GSM850	190	836.6	GPRS	2.95	13.00
			EGPRS	5.71	
GSM1900	661	1880.0	GPRS	2.73	
			EGPRS	5.68	

WCDMA


Band	Channel	f [MHz]	Mode	Ratio [dB]	Limit [dB]
Band 5	4183	836.6	REL99	2.90	13.00
			HSDPA	2.68	
Band 2	9400	1880.0	REL99	2.91	
			HSDPA	2.96	

LTE


Band	BW [MHz]	Channel	f [MHz]	Mode	Ratio [dB]	Limit [dB]
Band 41	20	40620	2593.0	QPSK	4.78	13.00
				16QAM	5.96	
	15			QPSK	4.79	
				16QAM	6.27	
	10			QPSK	4.89	
				16QAM	6.14	
	5			QPSK	4.94	
				16QAM	5.91	

9.2. CONDUCTED PEAK TO AVERAGE PLOTS


GSM

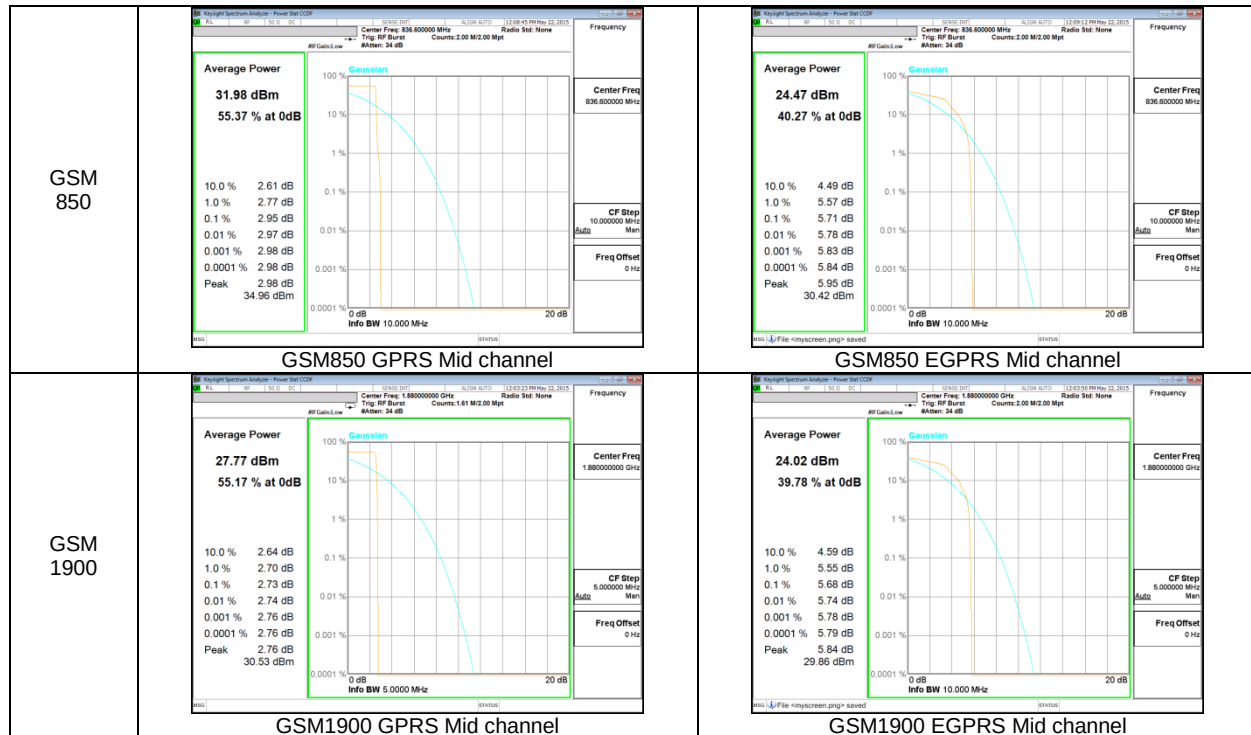

WCDMA

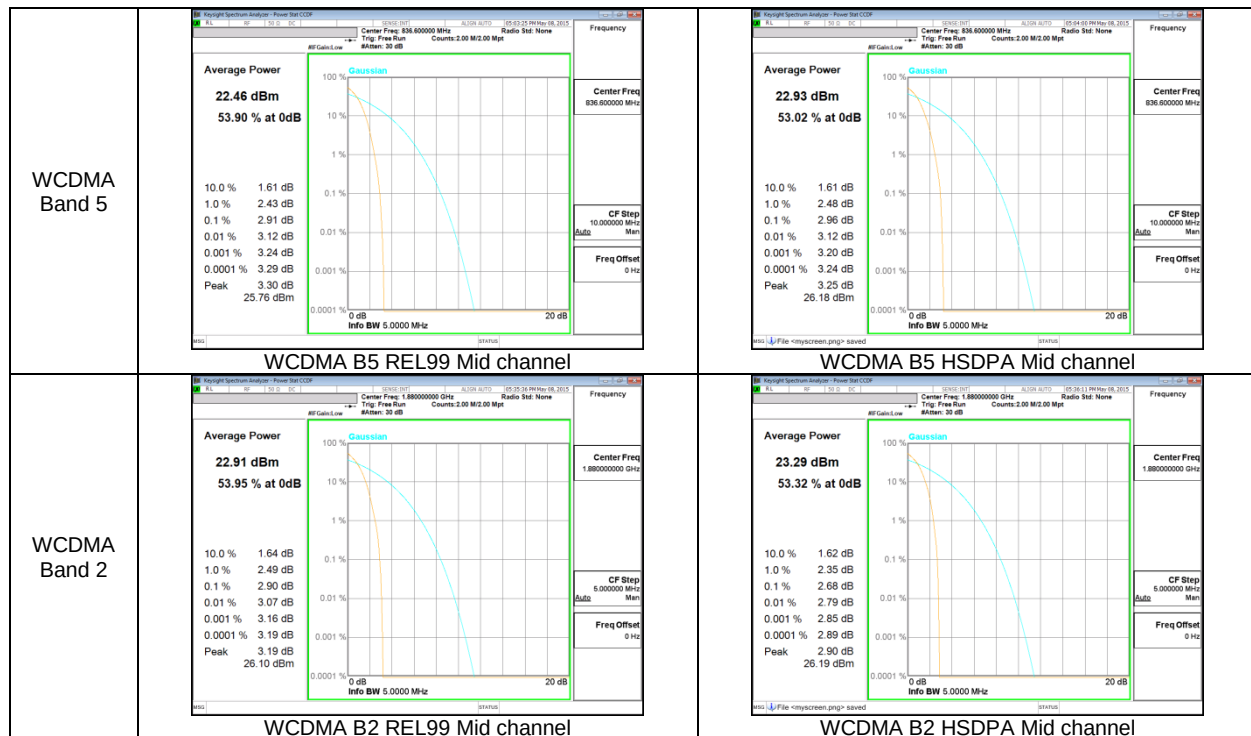

LTE Band 41

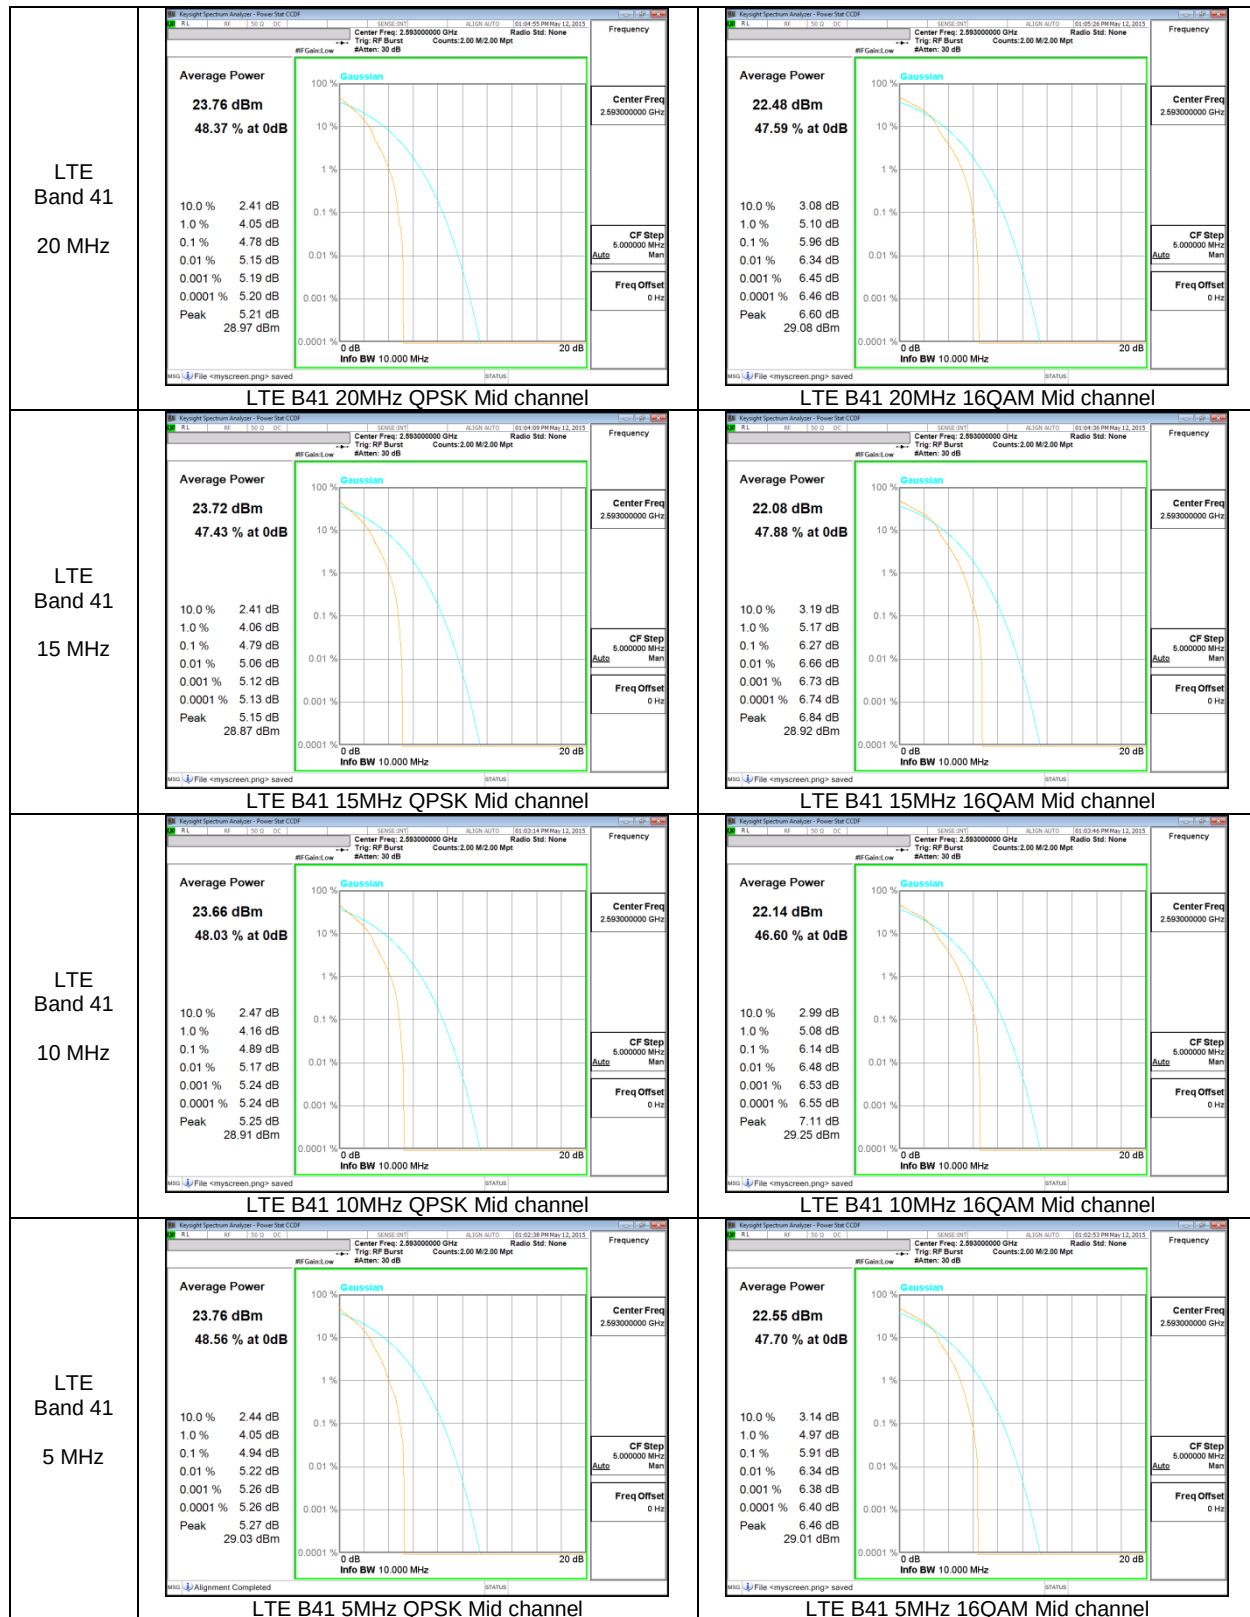

10. LIMITS AND CONDUCTED RESULTS

10.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

(KDB 971168 D01 Power Meas License Digital Systems v02r02)

10.1.1. OCCUPIED BANDWIDTH RESULTS

GSM

Band	Mode	Channel	f [MHz]	99% BW [KHz]	26dB BW [KHz]
GSM850	GPRS	128	824.2	242.1	312.4
		190	836.6	240.7	308.9
		251	848.8	240.0	313.6
	EGPRS	128	824.2	243.9	308.2
		190	836.6	240.6	304.6
		251	848.8	242.3	312.6
GSM1900	GPRS	512	1850.2	243.4	313.4
		661	1880.0	242.3	322.7
		810	1909.8	243.9	317.9
	EGPRS	512	1850.2	247.0	309.4
		661	1880.0	246.5	316.3
		810	1909.8	244.4	313.7

WCDMA

Band	Mode	Channel	f [MHz]	99% BW [MHz]	26dB BW [MHz]
Band 5	REL99	4132	826.4	4.146	4.718
		4183	836.6	4.145	4.704
		4233	846.6	4.143	4.710
	HSDPA	4132	826.4	4.152	4.712
		4183	836.6	4.157	4.724
		4233	846.6	4.155	4.719
Band 2	REL99	9262	1852.4	4.135	4.705
		9400	1880.0	4.141	4.697
		9538	1907.6	4.146	4.716
	HSDPA	9262	1852.4	4.148	4.707
		9400	1880.0	4.148	4.691
		9538	1907.6	4.143	4.702

LTE Band 41

Band	BW [MHz]	Channel	f [MHz]	Mode	99% BW [MHz]	26dB BW [MHz]
Band 41	20	40340	2565.0	QPSK	17.840	18.990
				16QAM	17.798	19.090
		40620	2593.0	QPSK	17.825	19.110
				16QAM	17.834	19.180
		41140	2645.0	QPSK	17.845	19.390
				16QAM	17.838	19.000
	15	40315	2562.5	QPSK	13.441	14.550
				16QAM	13.403	14.890
		40620	2593.0	QPSK	13.426	14.780
				16QAM	13.429	14.960
		41165	2647.5	QPSK	13.397	14.380
				16QAM	13.434	14.650
	10	40290	2560.0	QPSK	8.968	9.774
				16QAM	8.942	9.876
		40620	2593.0	QPSK	8.995	10.080
				16QAM	8.947	9.904
		41190	2650.0	QPSK	8.968	9.903
				16QAM	8.992	10.060
	5	40215	2552.5	QPSK	4.487	5.311
				16QAM	4.493	5.264
		40620	2593.0	QPSK	4.493	5.039
				16QAM	4.484	5.207
		41215	2652.5	QPSK	4.493	5.253
				16QAM	4.481	5.285

10.1.2. OCCUPIED BANDWIDTH PLOTS


GSM 850




GSM 1900



WCDMA Band 5

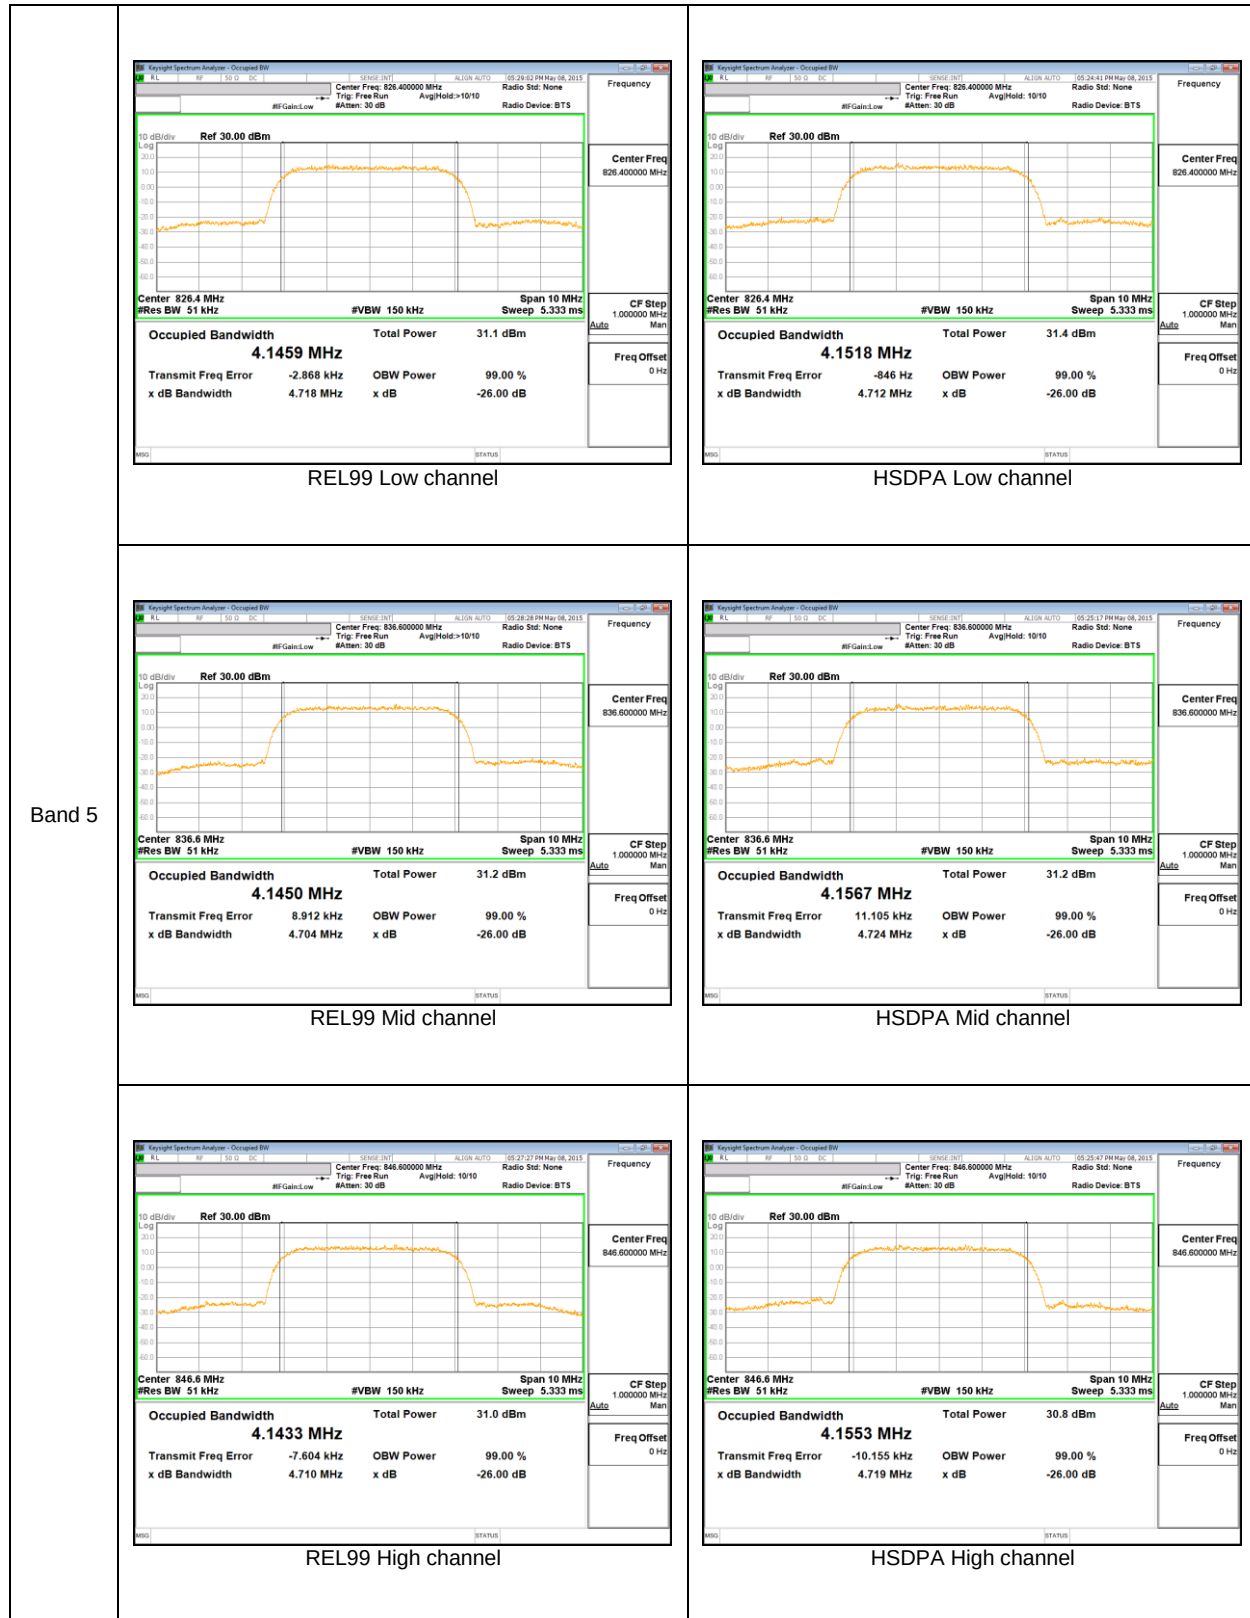

WCDMA Band 2

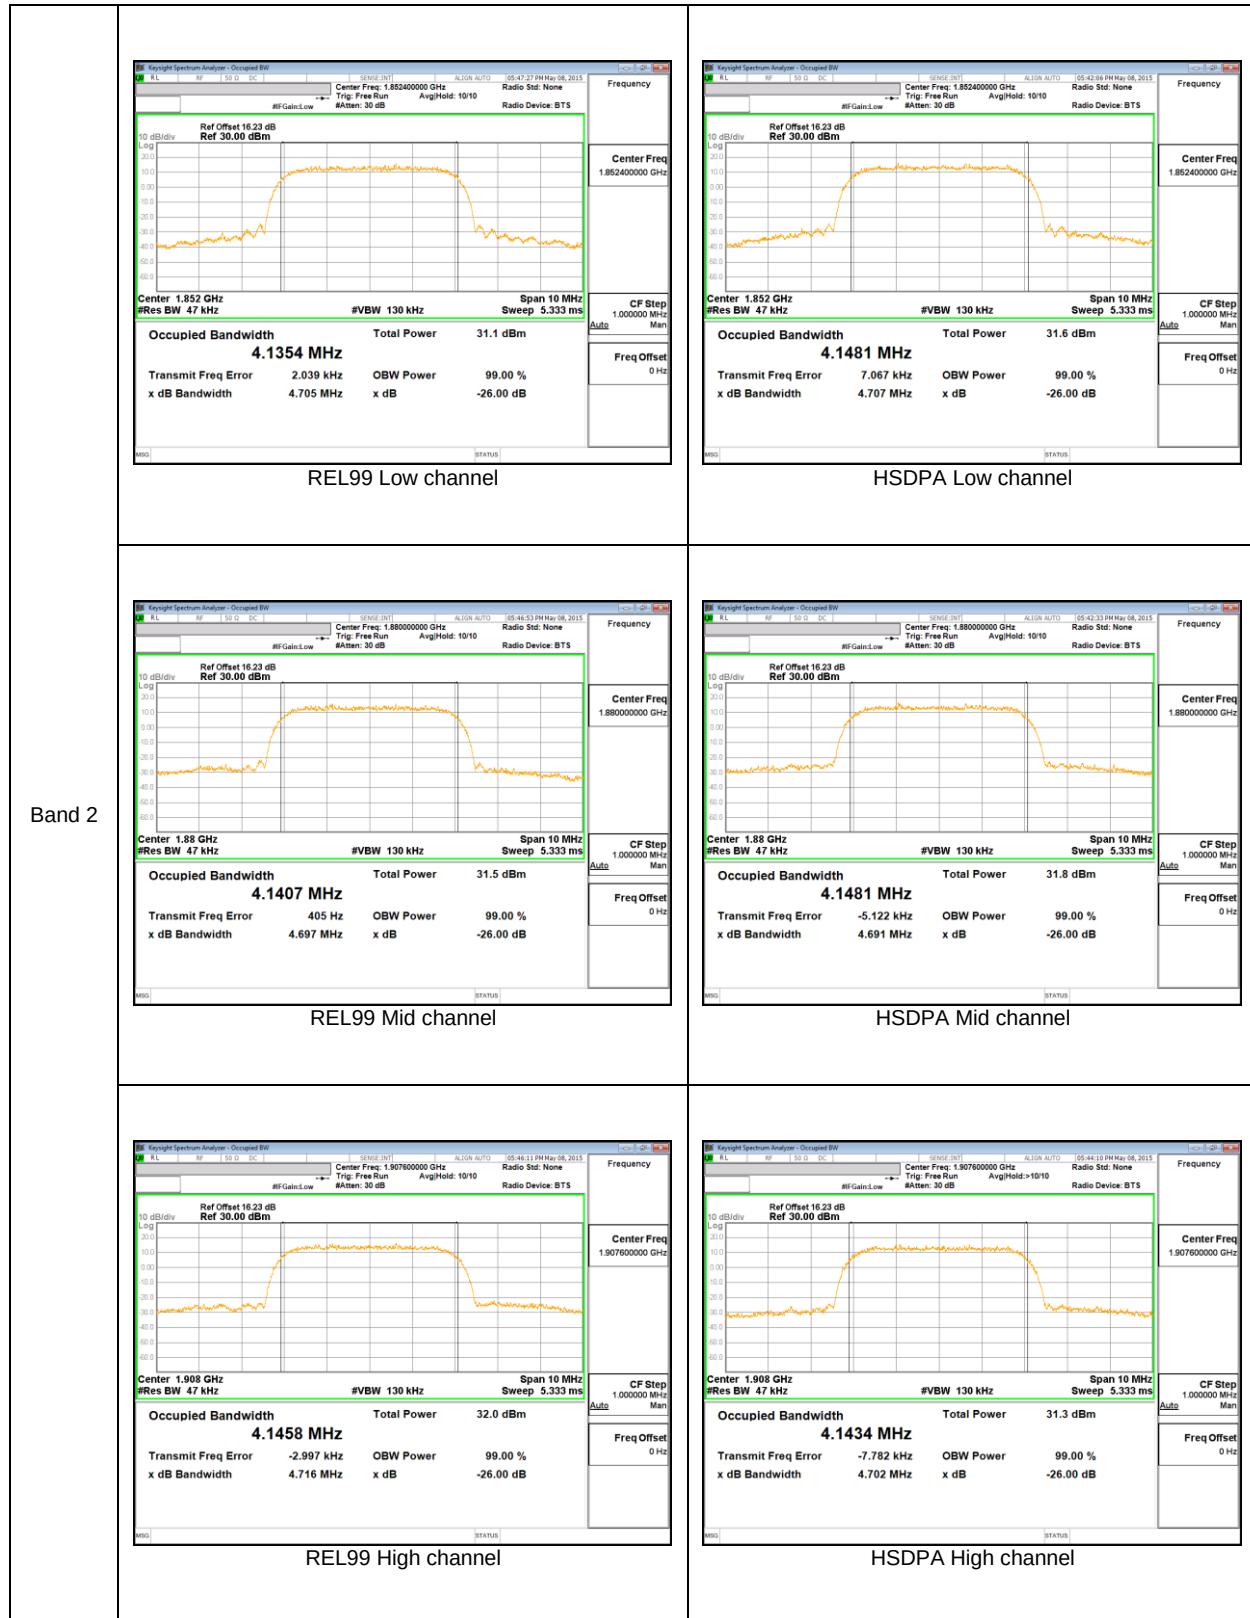

LTE Band 41

