

GSM 850 Reduced1

Frequency: 836.6 MHz; Duty Cycle: 1:8.30042; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 42.503$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1446; Calibrated: 2014-08-27
- Probe: EX3DV4 - SN7314; ConvF(9.92, 9.92, 9.92); Calibrated: 2014-08-27;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM Phantom CRP v5.0(Right); Type: QD000P40CD; Serial: TP:1846

RHS/Touch_GPRS 2 Slots_ch 190/Area Scan (11x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.441 W/kg


RHS/Touch_GPRS 2 Slots_ch 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.36 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.879 W/kg

SAR(1 g) = 0.438 W/kg; SAR(10 g) = 0.230 W/kg

Maximum value of SAR (measured) = 0.557 W/kg

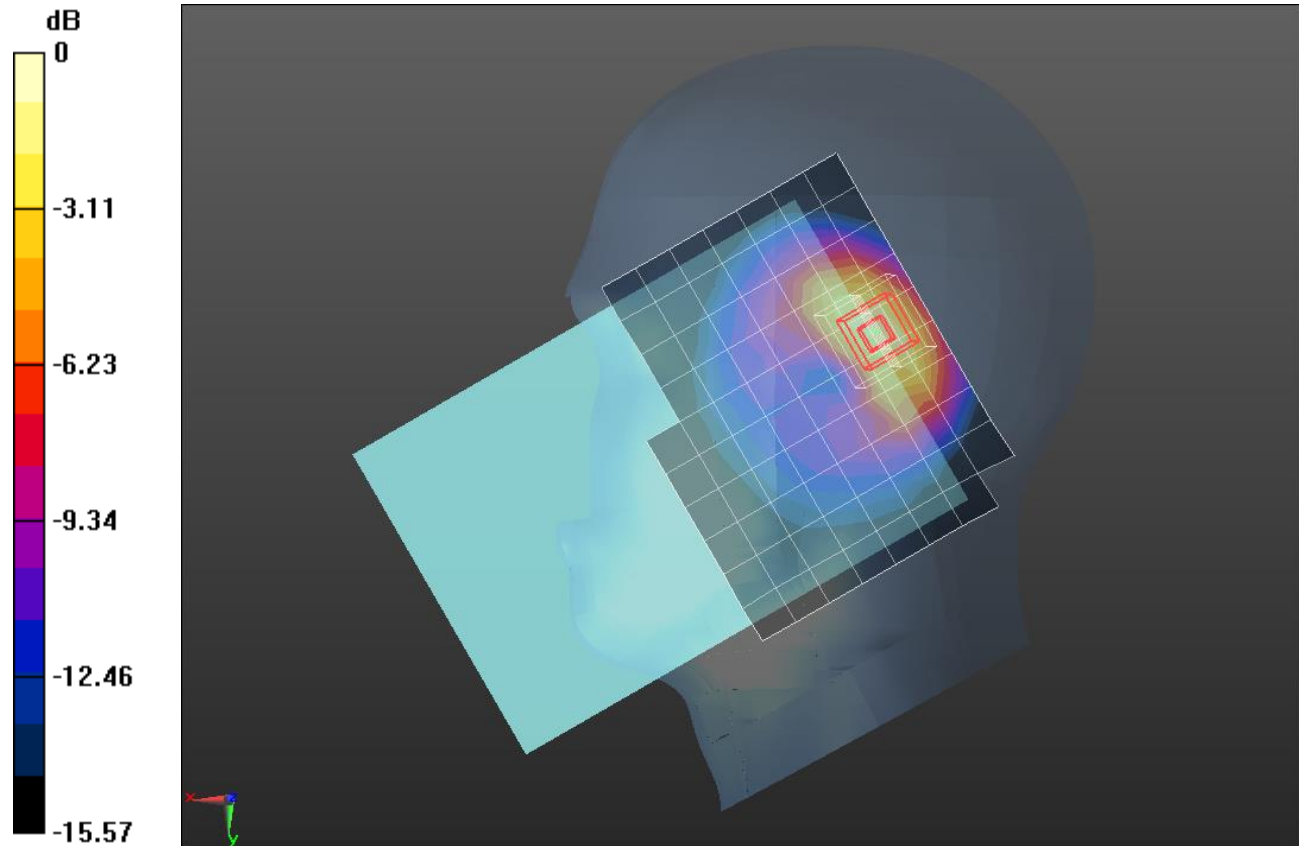

0 dB = 0.557 W/kg = -2.54 dBW/kg

GSM 850_Reduced

Frequency: 836.6 MHz; Duty Cycle: 1:4.00037; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 1.012$ S/m; $\epsilon_r = 53.555$; $\rho = 1000$ kg/m³
DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2014-08-25
- Probe: EX3DV4 - SN7313; ConvF(9.57, 9.57, 9.57); Calibrated: 2014-08-27;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA; Serial: TP:2005

Edge 1/GPRS 2 slot_ch 190 sample no.8_0425/Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.995 W/kg


Edge 1/GPRS 2 slot_ch 190 sample no.8_0425/Zoom Scan 2 (5x8x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.78 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.755 W/kg; SAR(10 g) = 0.402 W/kg

Maximum value of SAR (measured) = 1.08 W/kg

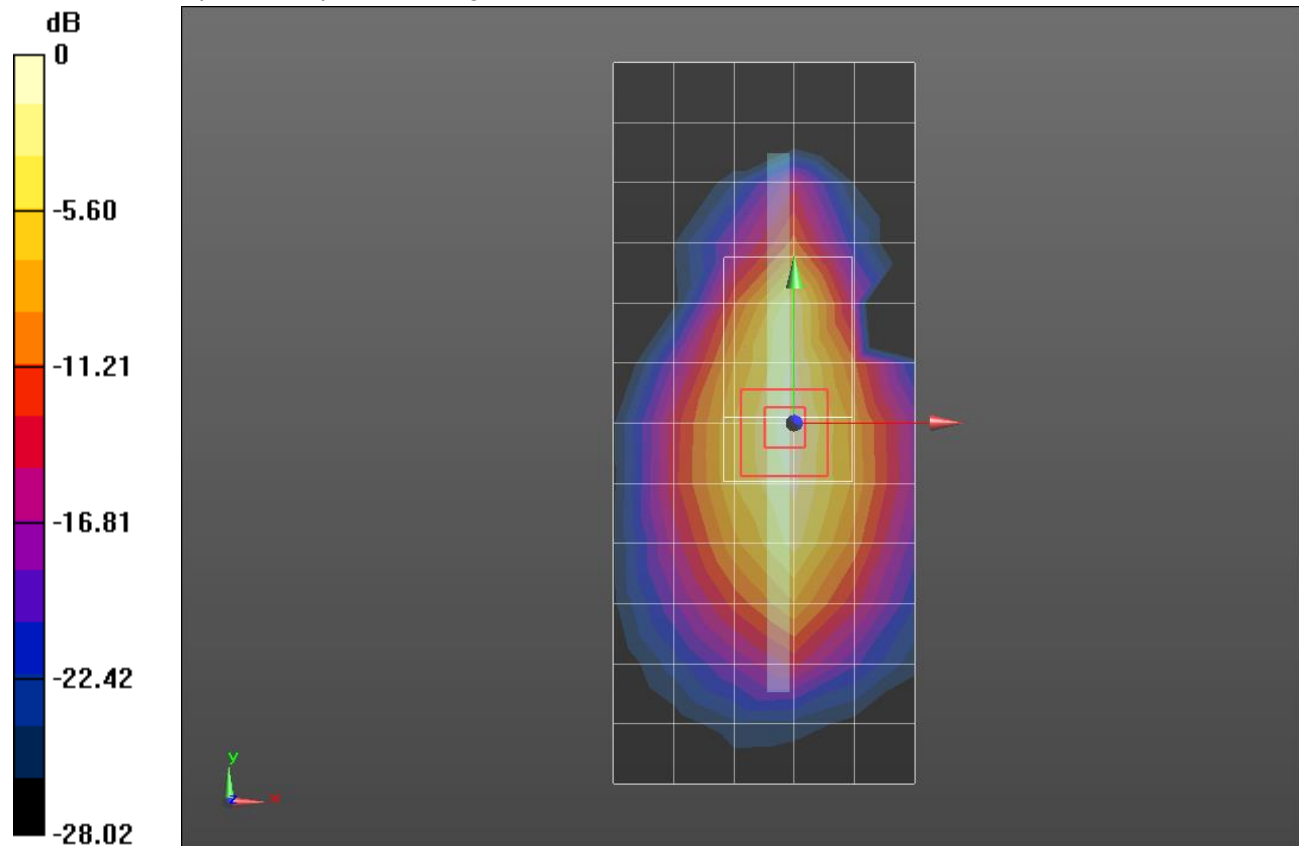

0 dB = 1.08 W/kg = 0.33 dBW/kg

GSM 1900 Reduced1

Frequency: 1880 MHz; Duty Cycle: 1:2.60016; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.443$ S/m; $\epsilon_r = 38.188$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2014-08-25
- Probe: EX3DV4 - SN7313; ConvF(7.87, 7.87, 7.87); Calibrated: 2014-08-27;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM (20deg probe tilt) with CRP v5.0(Middle); Type: QD000P40CD; Serial: TP:xxxx

RHS/Tilt_GPRS 3 Slots_ch 661/Area Scan (11x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.457 W/kg


RHS/Tilt_GPRS 3 Slots_ch 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.55 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.924 W/kg

SAR(1 g) = 0.433 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 0.623 W/kg

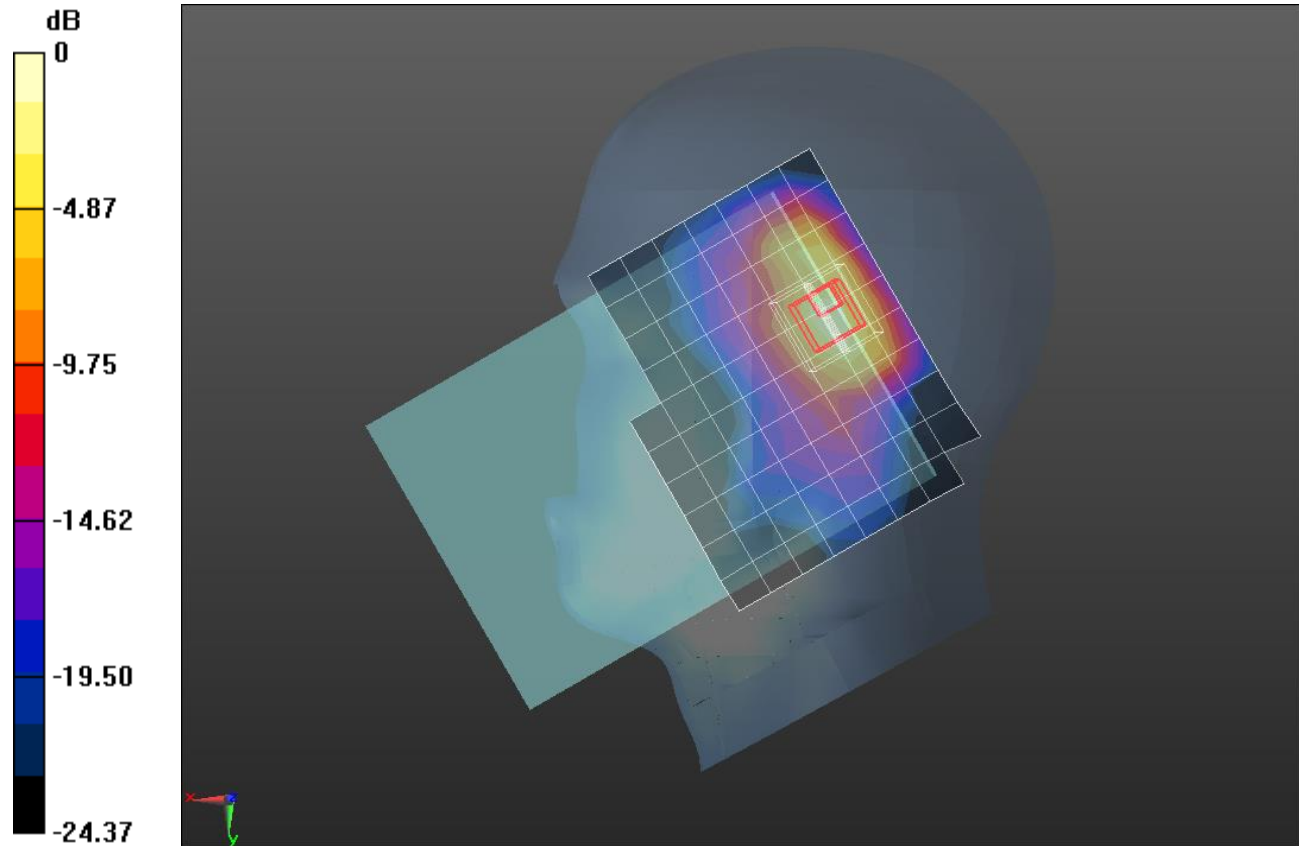

0 dB = 0.623 W/kg = -2.06 dBW/kg

GSM 1900_0419

Frequency: 1880 MHz; Duty Cycle: 1:2.60016; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.559$ S/m; $\epsilon_r = 55.374$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1446; Calibrated: 2014-08-27
- Probe: EX3DV4 - SN7314; ConvF(7.55, 7.55, 7.55); Calibrated: 2014-08-27;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI Phantom v5.0; Type: QDOVA002AA; Serial: TP:2005


Edge 4/GPRS 3 Slot ch 661 0mm/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.05 W/kg

Edge 4/GPRS 3 Slot ch 661 0mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.05 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.661 W/kg; SAR(10 g) = 0.287 W/kg

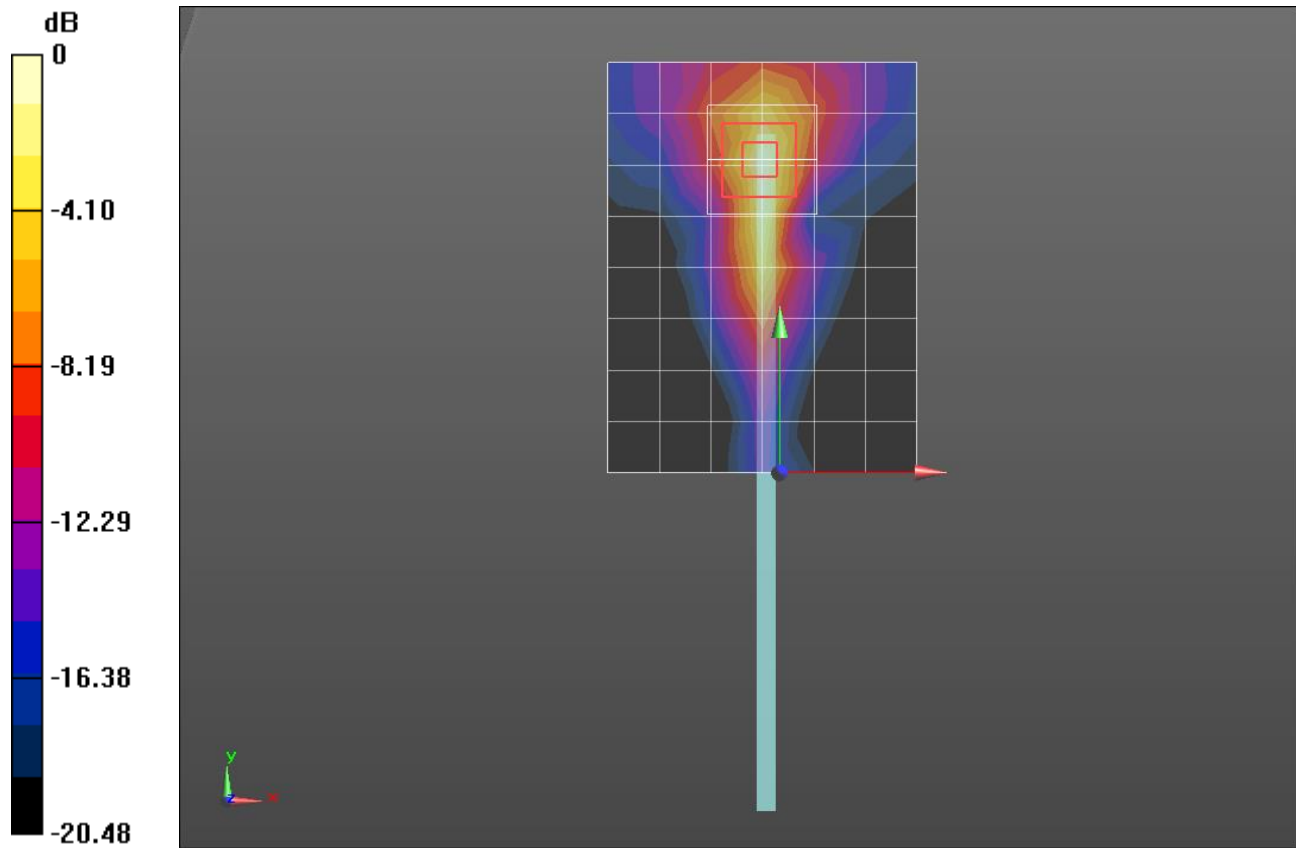

0 dB = 1.05 W/kg = 0.21 dBW/kg

WCDMA Band V

Frequency: 836.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 42.503$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1446; Calibrated: 2014-08-27
- Probe: EX3DV4 - SN7314; ConvF(9.92, 9.92, 9.92); Calibrated: 2014-08-27;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM Phantom CRP v5.0(Right); Type: QD000P40CD; Serial: TP:1846

RHS/Touch_RMC Rel .99_ch 4183/Area Scan (11x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.449 W/kg


RHS/Touch_RMC Rel .99_ch 4183/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.13 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.720 W/kg

SAR(1 g) = 0.372 W/kg; SAR(10 g) = 0.199 W/kg

Maximum value of SAR (measured) = 0.459 W/kg

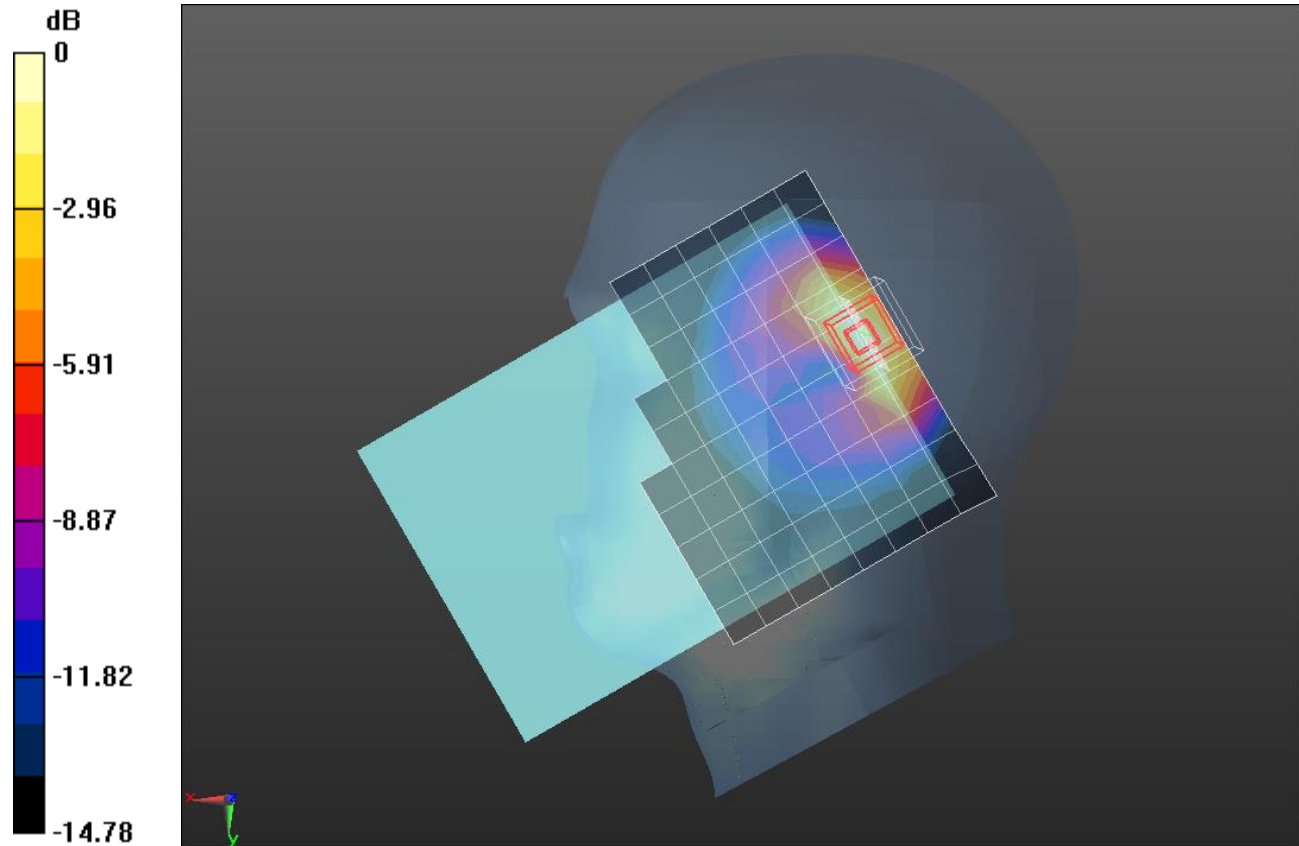

0 dB = 0.459 W/kg = -3.38 dBW/kg

WCDMA Band V_Reduced

Frequency: 826.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.988$ S/m; $\epsilon_r = 54.358$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2014-08-25
- Probe: EX3DV4 - SN7313; ConvF(9.57, 9.57, 9.57); Calibrated: 2014-08-27;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA; Serial: TP:2005

EDGE 1/Rel 99 RMC_ch 4132/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.13 W/kg


EDGE 1/Rel 99 RMC_ch 4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.45 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 0.882 W/kg; SAR(10 g) = 0.473 W/kg

Maximum value of SAR (measured) = 1.24 W/kg

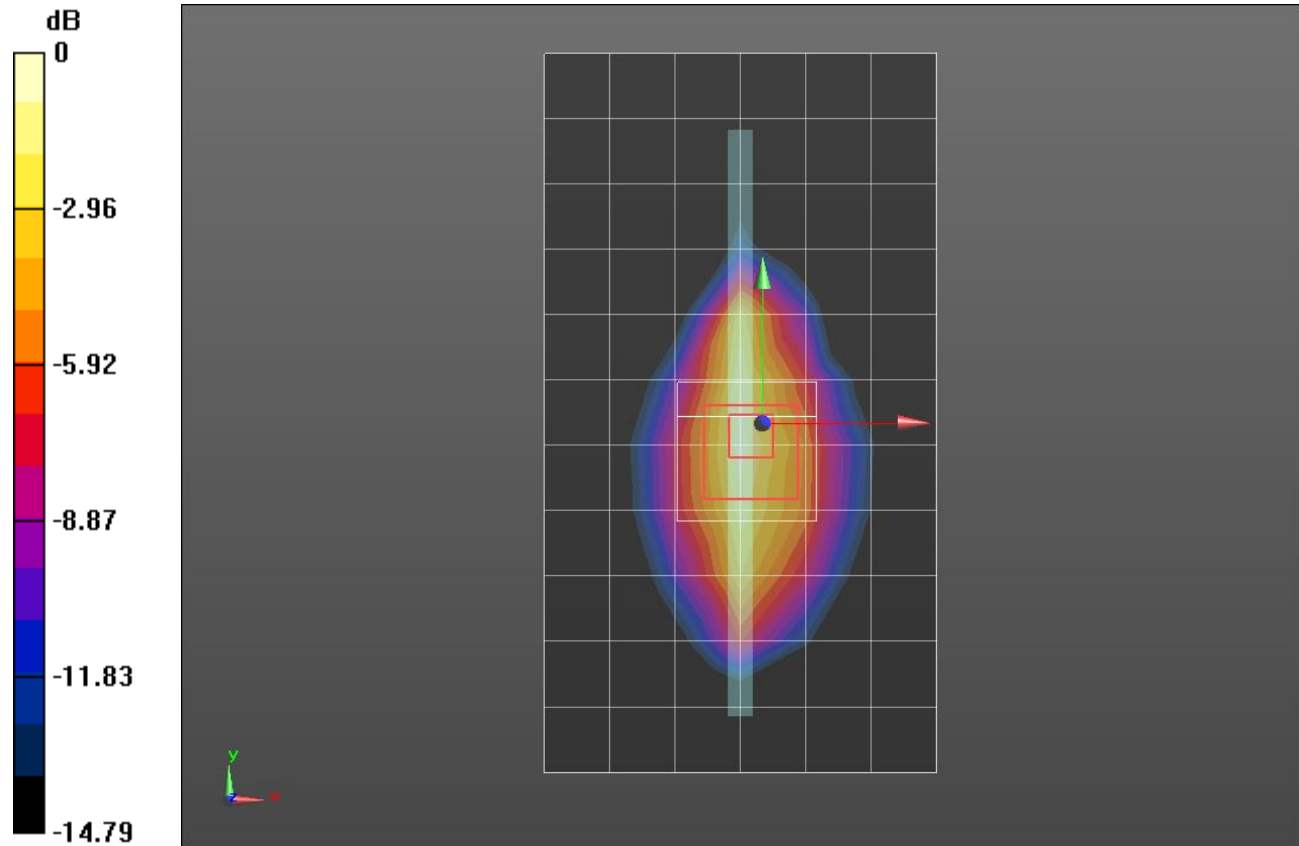

0 dB = 1.24 W/kg = 0.93 dBW/kg

WCDMA Band IV

Frequency: 1732.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.315$ S/m; $\epsilon_r = 39.61$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2014-08-25
- Probe: EX3DV4 - SN7313; ConvF(8.14, 8.14, 8.14); Calibrated: 2014-08-27;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM (20deg probe tilt) with CRP v5.0(Middle); Type: QD000P40CD; Serial: TP:xxxx

RHS/Tilt_RMC Rel .99_ch 1413/Area Scan (11x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.600 W/kg


RHS/Tilt_RMC Rel .99_ch 1413/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.35 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.867 W/kg

SAR(1 g) = 0.439 W/kg; SAR(10 g) = 0.223 W/kg

Maximum value of SAR (measured) = 0.592 W/kg

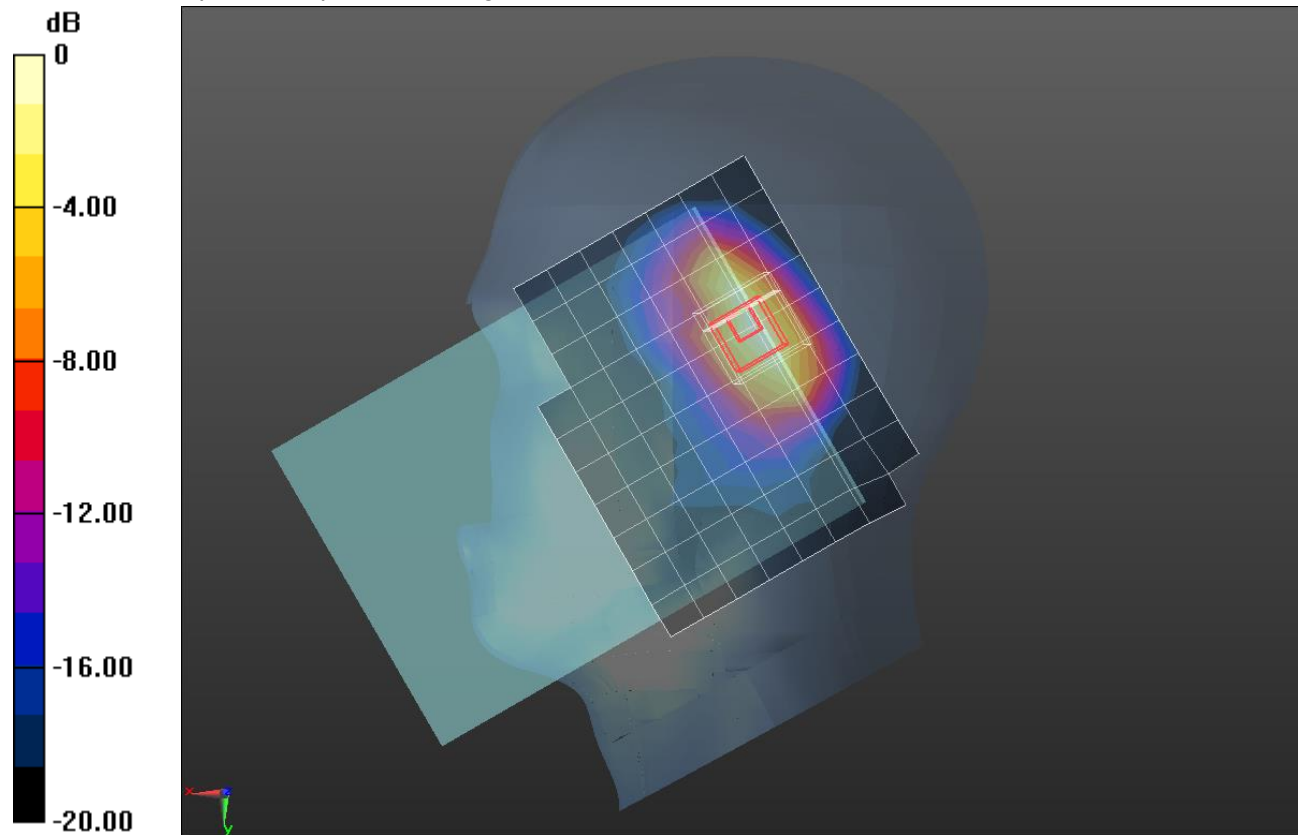

Max_WCDMA Band IV_0519


Frequency: 1732.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 52.426$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2014-08-25
- Probe: EX3DV4 - SN7313; ConvF(7.83, 7.83, 7.83); Calibrated: 2014-08-27;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA; Serial: TP:2005

EDGE 4/Rel 99 RMC_ch 1413 Max Power 0mm/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.595 W/kg

EDGE 4/Rel 99 RMC_ch 1413 Max Power 0mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 19.69 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 1.71 W/kg
SAR(1 g) = 0.713 W/kg; SAR(10 g) = 0.314 W/kg
Maximum value of SAR (measured) = 1.14 W/kg

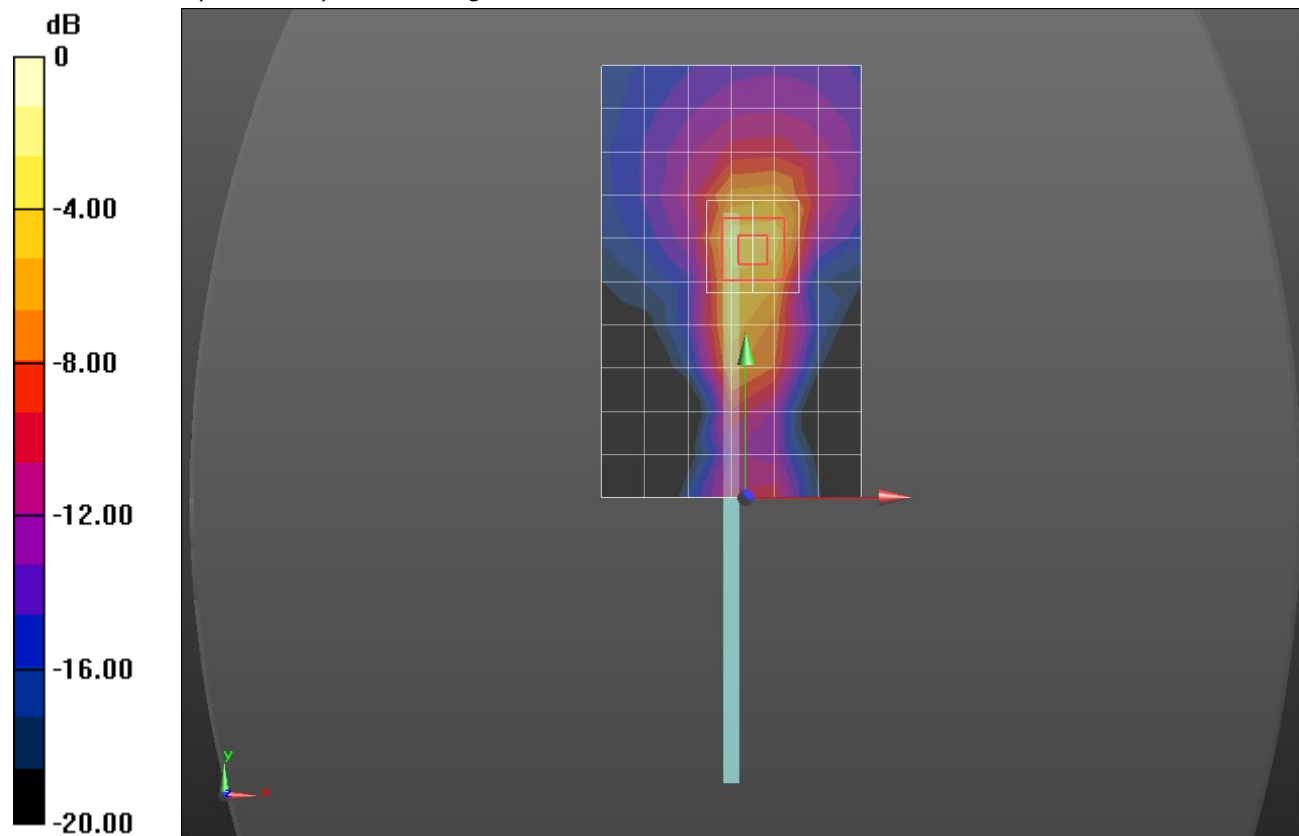

0 dB = 1.14 W/kg = 0.57 dBW/kg

WCDMA Band II Reduced

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.443$ S/m; $\epsilon_r = 38.188$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2014-08-25
- Probe: EX3DV4 - SN7313; ConvF(7.87, 7.87, 7.87); Calibrated: 2014-08-27;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM (20deg probe tilt) with CRP v5.0(Middle); Type: QD000P40CD; Serial: TP:xxxx

RHS/Tilt_Rel 99 RMC_ch 9400/Area Scan (11x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.704 W/kg


RHS/Tilt_Rel 99 RMC_ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.91 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.622 W/kg; SAR(10 g) = 0.301 W/kg

Maximum value of SAR (measured) = 0.830 W/kg

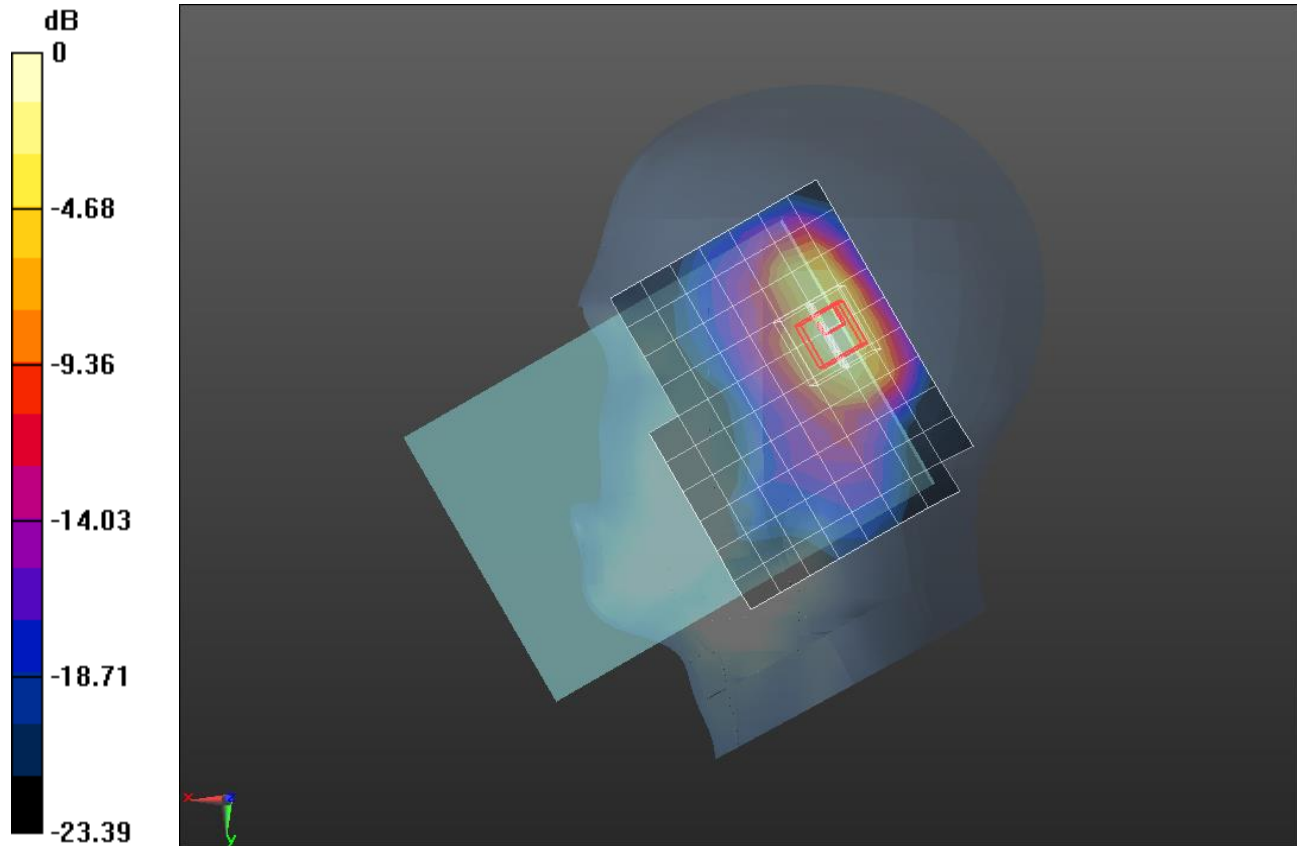

0 dB = 0.830 W/kg = -0.81 dBW/kg

Max_WCDMA Band II_0420

Frequency: 1907.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.59$ S/m; $\epsilon_r = 53.23$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1446; Calibrated: 2014-08-27
- Probe: EX3DV4 - SN7314; ConvF(7.55, 7.55, 7.55); Calibrated: 2014-08-27;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI Phantom v5.0; Type: QDOVA002AA; Serial: TP:2005

EDGE 4/Rel 99 RMC_ch 9538 Max Power 0mm/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.60 W/kg


EDGE 4/Rel 99 RMC_ch 9538 Max Power 0mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.02 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.43 W/kg

SAR(1 g) = 0.985 W/kg; SAR(10 g) = 0.413 W/kg

Maximum value of SAR (measured) = 1.61 W/kg

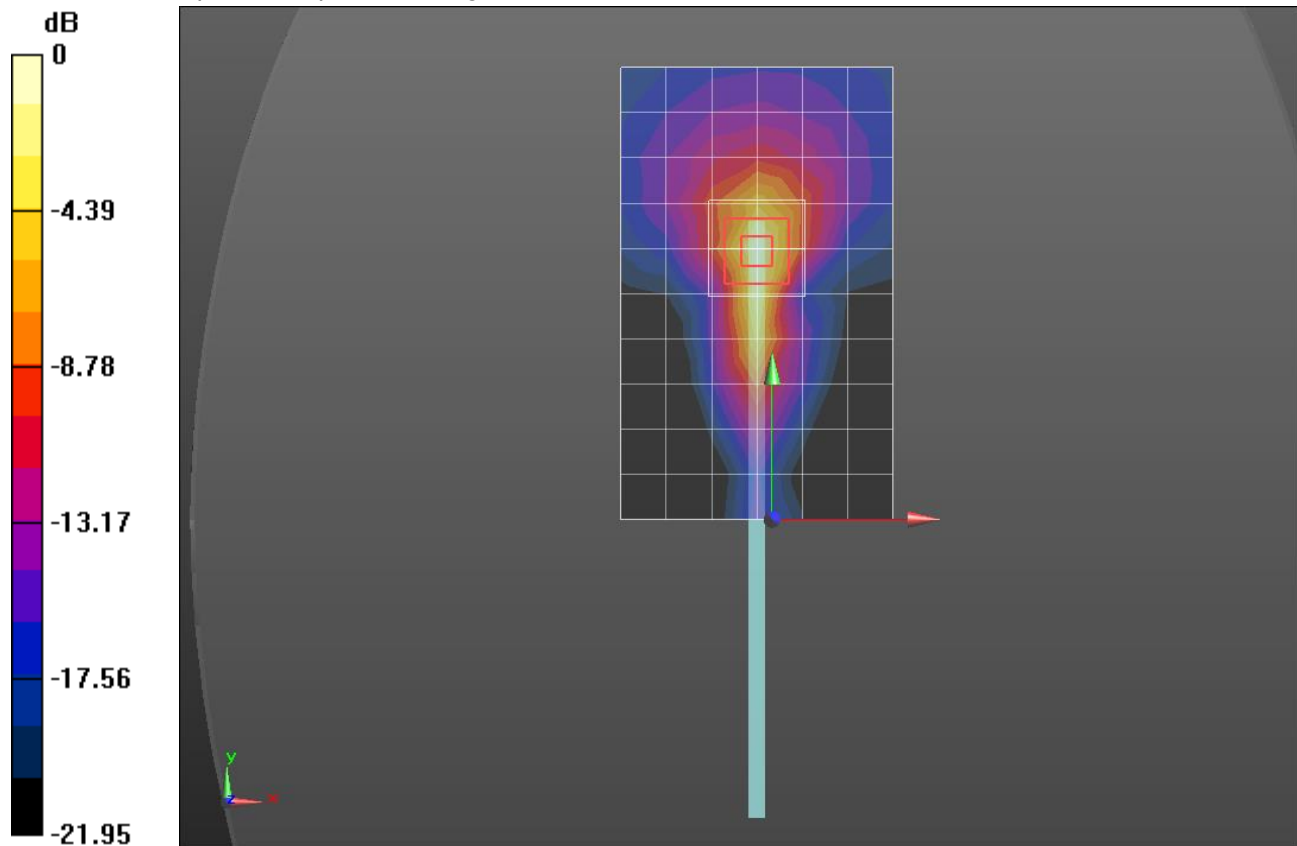

0 dB = 1.61 W/kg = 2.07 dBW/kg

LTE Band2_Reduced

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 38.893$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2014-08-25
- Probe: EX3DV4 - SN7313; ConvF(7.87, 7.87, 7.87); Calibrated: 2014-08-27;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM (20deg probe tilt) with CRP v5.0(Middle); Type: QD000P40CD; Serial: TP:xxxx

RHS/Tilt_QPSK RB 50/50 ch 18900/Area Scan (11x8x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.591 W/kg


RHS/Tilt_QPSK RB 50/50 ch 18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.21 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.977 W/kg

SAR(1 g) = 0.454 W/kg; SAR(10 g) = 0.214 W/kg

Maximum value of SAR (measured) = 0.662 W/kg

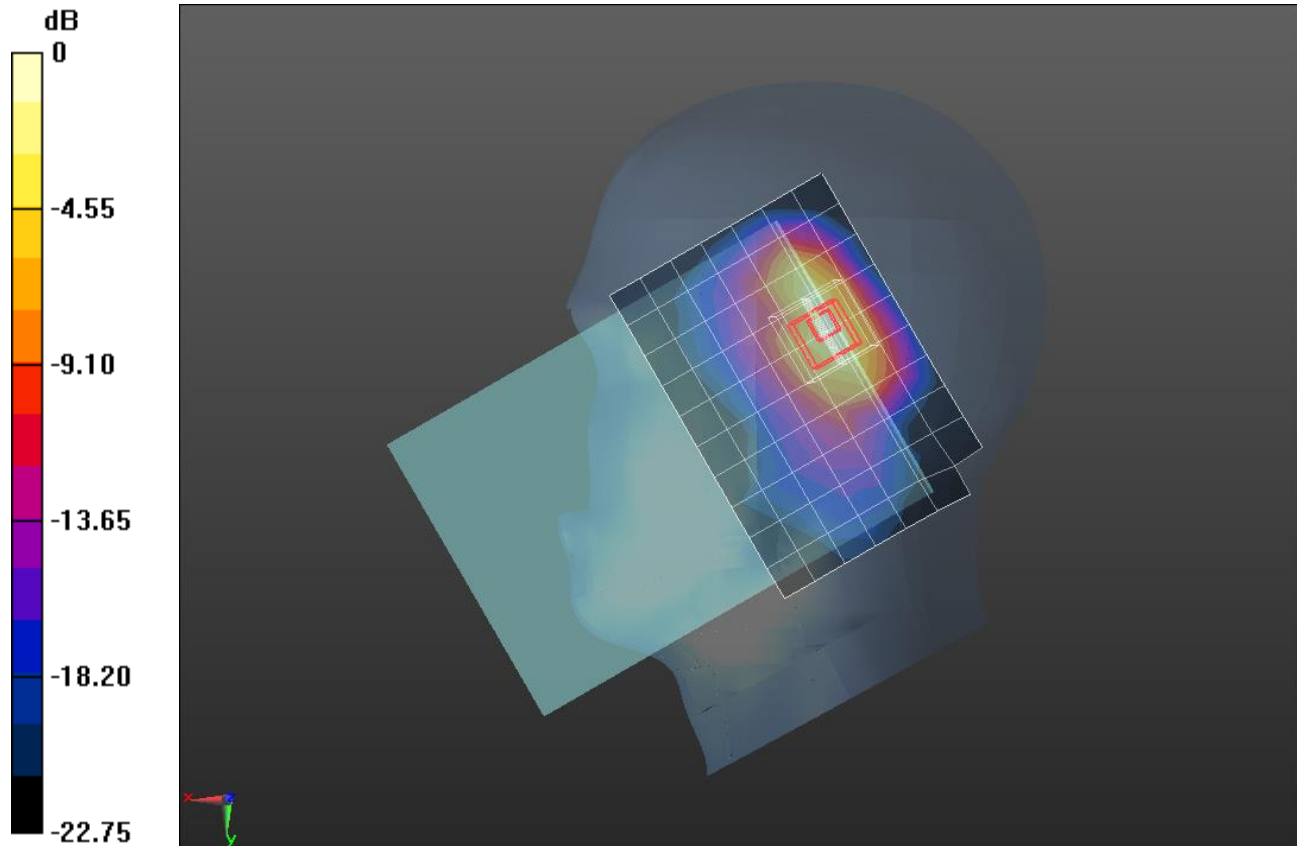

0 dB = 0.662 W/kg = -1.79 dBW/kg

LTE Band2_Reduced_0426

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.569$ S/m; $\epsilon_r = 54.474$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1446; Calibrated: 2014-08-27
- Probe: EX3DV4 - SN7323; ConvF(7.77, 7.77, 7.77); Calibrated: 2014-12-05;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI Phantom v5.0; Type: QDOVA002AA; Serial: TP:2005

Edge 1/QPSK RB 50/50 ch 18900/Area Scan (6x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.779 W/kg


Edge 1/QPSK RB 50/50 ch 18900/Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.55 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 0.654 W/kg; SAR(10 g) = 0.314 W/kg

Maximum value of SAR (measured) = 1.10 W/kg

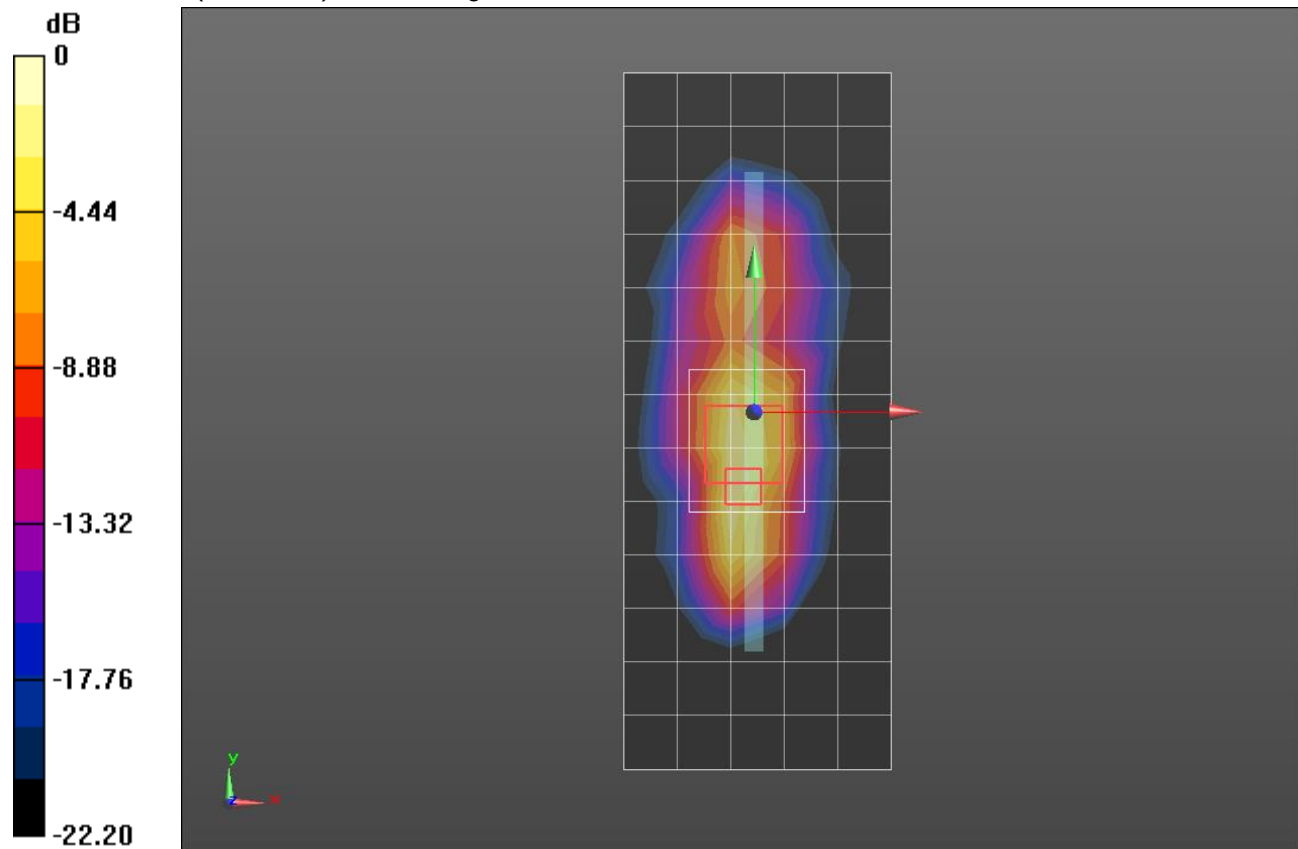

0 dB = 1.10 W/kg = 0.41 dBW/kg

LTE Band4_Reduced

Frequency: 1732.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.31$ S/m; $\epsilon_r = 39.48$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2014-08-25
- Probe: EX3DV4 - SN7313; ConvF(8.14, 8.14, 8.14); Calibrated: 2014-08-27;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM (20deg probe tilt) with CRP v5.0(Middle); Type: QD000P40CD; Serial: TP:xxxx

RHS/Tilt_QPSK RB 50/24 ch 20175/Area Scan (11x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.772 W/kg


RHS/Tilt_QPSK RB 50/24 ch 20175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.82 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.580 W/kg; SAR(10 g) = 0.286 W/kg

Maximum value of SAR (measured) = 0.857 W/kg

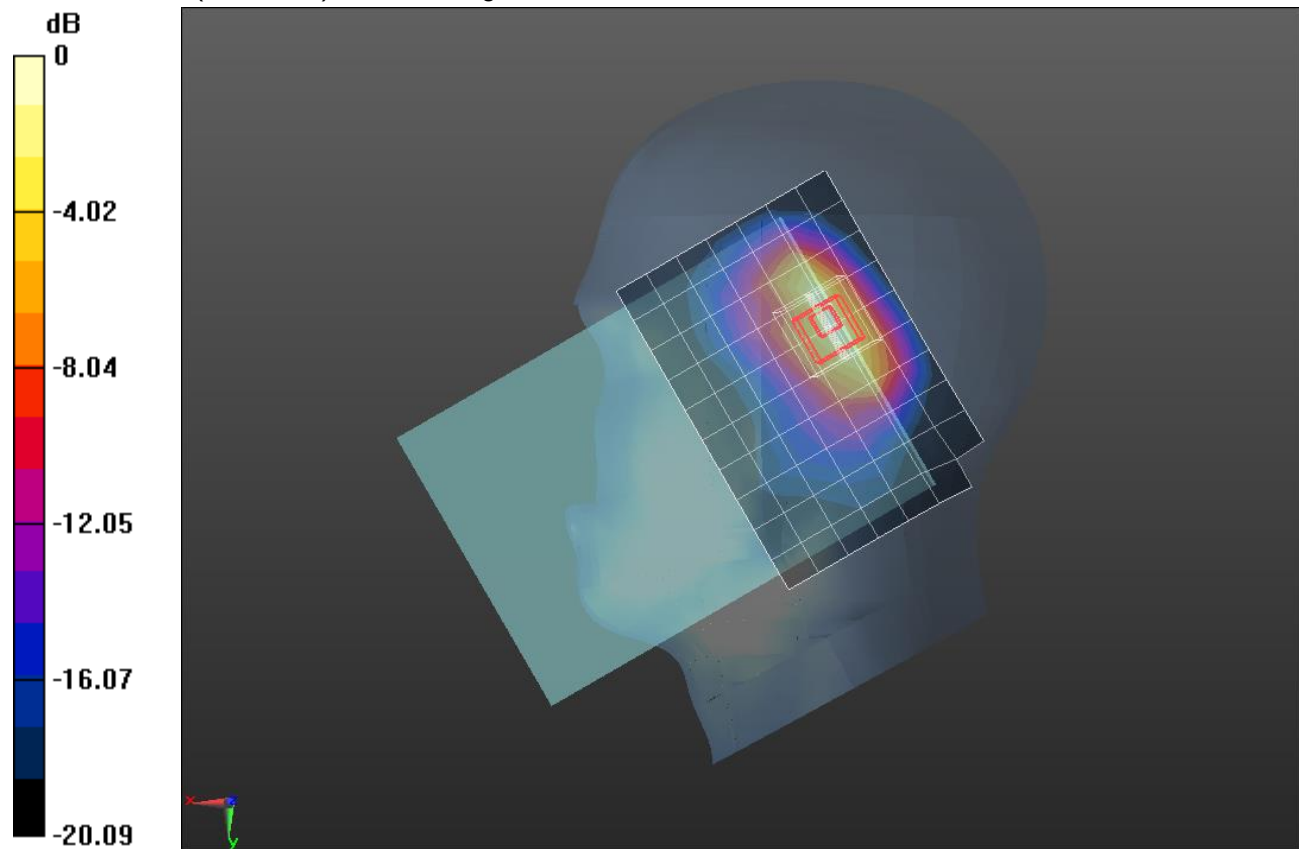

0 dB = 0.857 W/kg = -0.67 dBW/kg

LTE Band4_Redueced_0426

Frequency: 1732.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.434$ S/m; $\epsilon_r = 54.897$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1446; Calibrated: 2014-08-27
- Probe: EX3DV4 - SN7323; ConvF(8.19, 8.19, 8.19); Calibrated: 2014-12-05;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI Phantom v5.0; Type: QDOVA002AA; Serial: TP:2005

Edge 1/QPSK RB 100/0 ch 20175/Area Scan (6x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.850 W/kg


Edge 1/QPSK RB 100/0 ch 20175/Zoom Scan (5x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.56 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 0.806 W/kg; SAR(10 g) = 0.397 W/kg

Maximum value of SAR (measured) = 1.38 W/kg

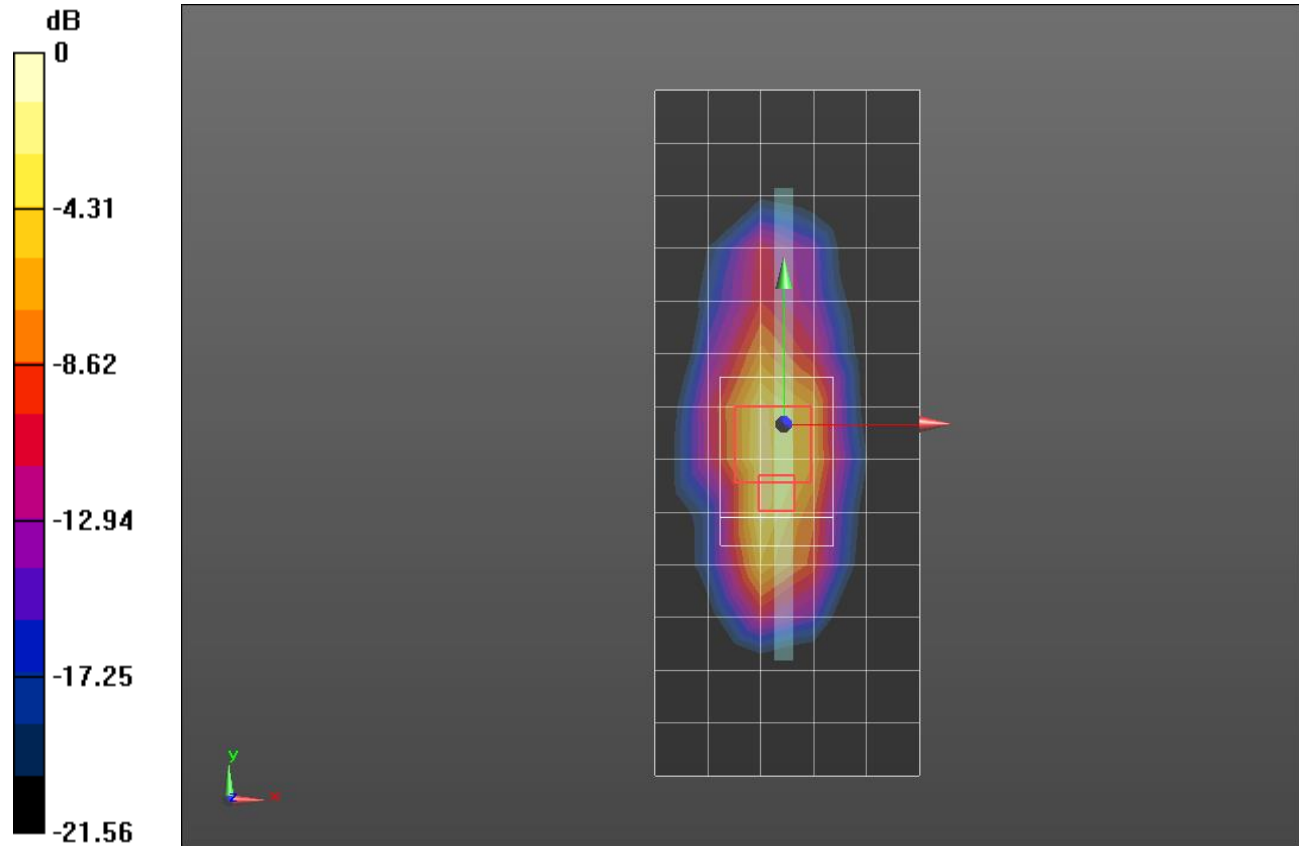

0 dB = 1.38 W/kg = 1.40 dBW/kg

LTE Band5_Reduced

Frequency: 836.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 41.643$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1446; Calibrated: 2014-08-27
- Probe: EX3DV4 - SN7323; ConvF(10.07, 10.07, 10.07); Calibrated: 2014-12-05;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM Phantom CRP v5.0(Right); Type: QD000P40CD; Serial: TP:1846

RHS/Touch_QPSK RB 1/25 ch 20525/Area Scan (11x8x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.395 W/kg



RHS/Touch_QPSK RB 1/25 ch 20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.40 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.705 W/kg

SAR(1 g) = 0.366 W/kg; SAR(10 g) = 0.197 W/kg

Maximum value of SAR (measured) = 0.451 W/kg

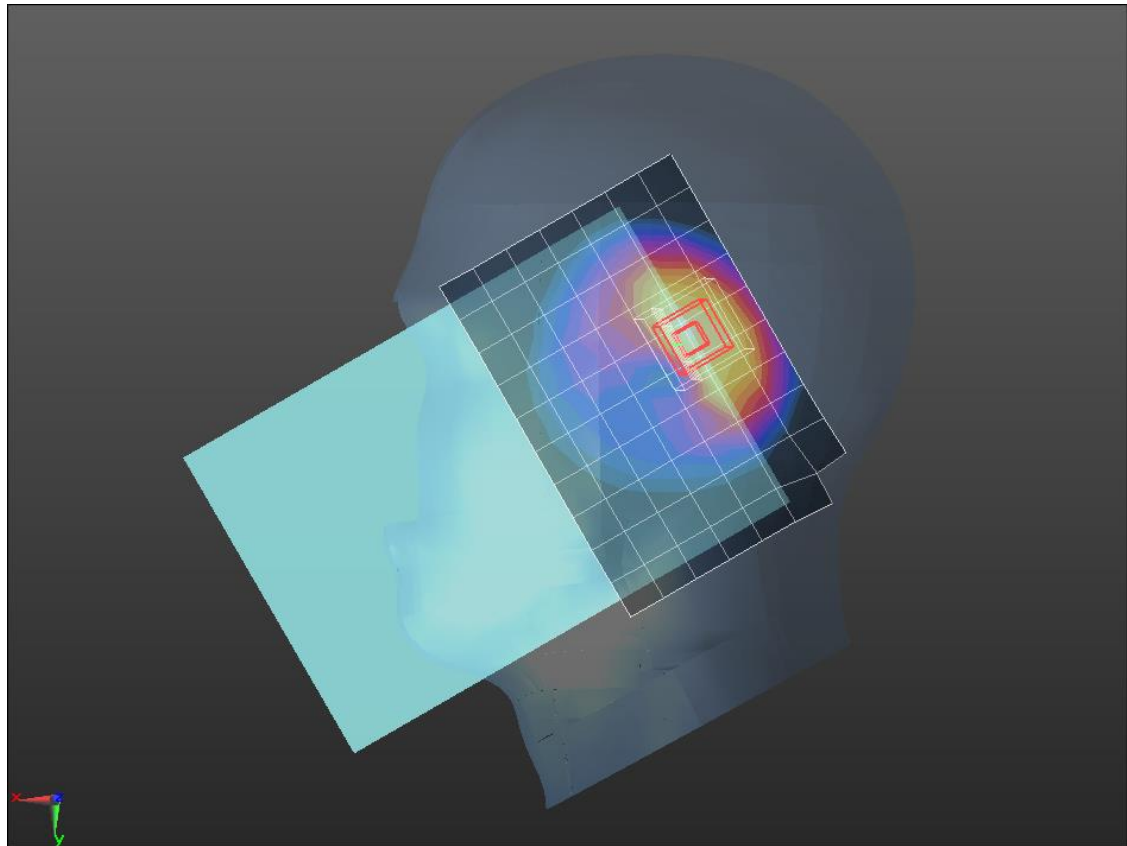

0 dB = 0.451 W/kg = -3.46 dBW/kg

LTE Band5_Reduced_0424

Frequency: 829 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 829$ MHz; $\sigma = 1.005$ S/m; $\epsilon_r = 53.628$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2014-08-25
- Probe: EX3DV4 - SN7313; ConvF(9.57, 9.57, 9.57); Calibrated: 2014-08-27;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA; Serial: TP:2005

Edge 1/QPSK RB 50/0 ch 20450/Area Scan (6x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.710 W/kg



Edge 1/QPSK RB 50/0 ch 20450/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.16 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.737 W/kg; SAR(10 g) = 0.392 W/kg

Maximum value of SAR (measured) = 1.05 W/kg

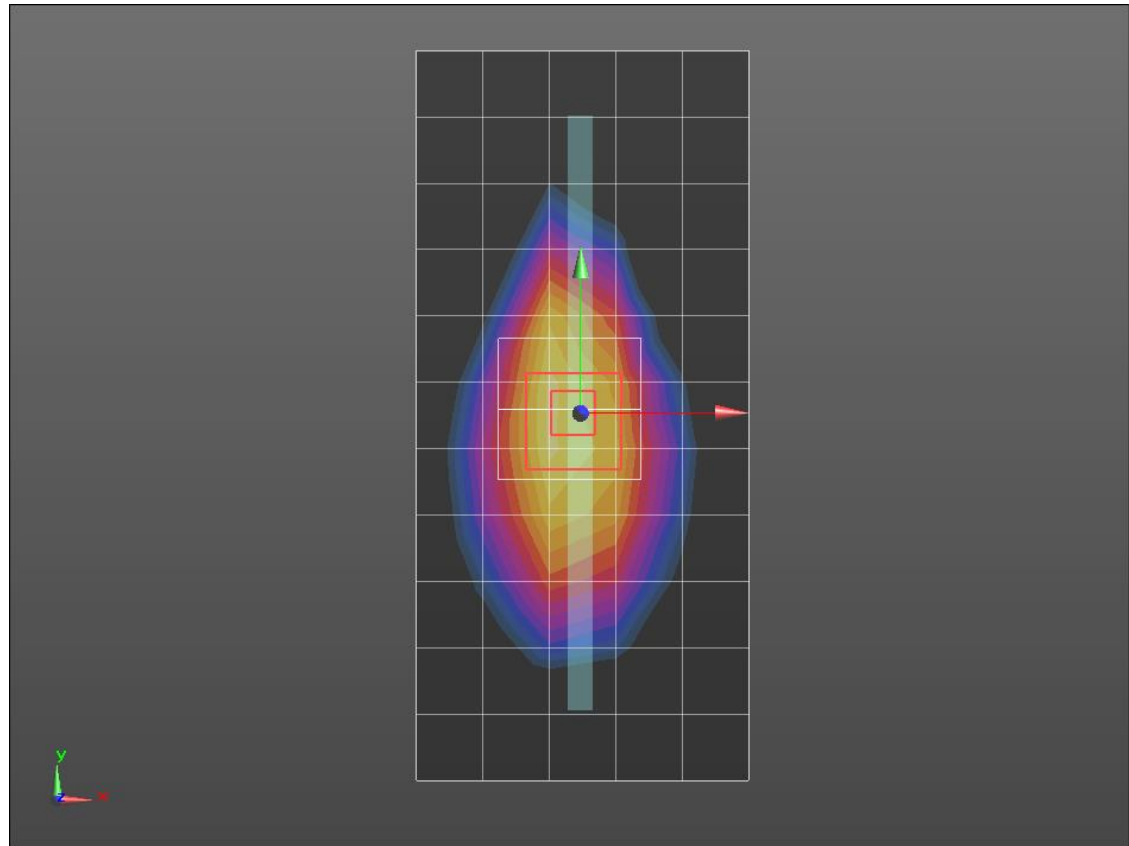

0 dB = 1.05 W/kg = 0.21 dBW/kg

LTE Band17_Reduced_0521

Frequency: 710 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 710 \text{ MHz}$; $\sigma = 0.857 \text{ S/m}$; $\epsilon_r = 42.21$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1446; Calibrated: 2014-08-27
- Probe: EX3DV4 - SN7323; ConvF(10.68, 10.68, 10.68); Calibrated: 2014-12-05;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM Phantom CRP v5.0(Right); Type: QD000P40CD; Serial: TP:1855

RHS/Touch_QPSK RB 1/0 ch 23790/Area Scan (11x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0864 W/kg


RHS/Touch_QPSK RB 1/0 ch 23790/Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.464 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.180 W/kg

SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.128 W/kg

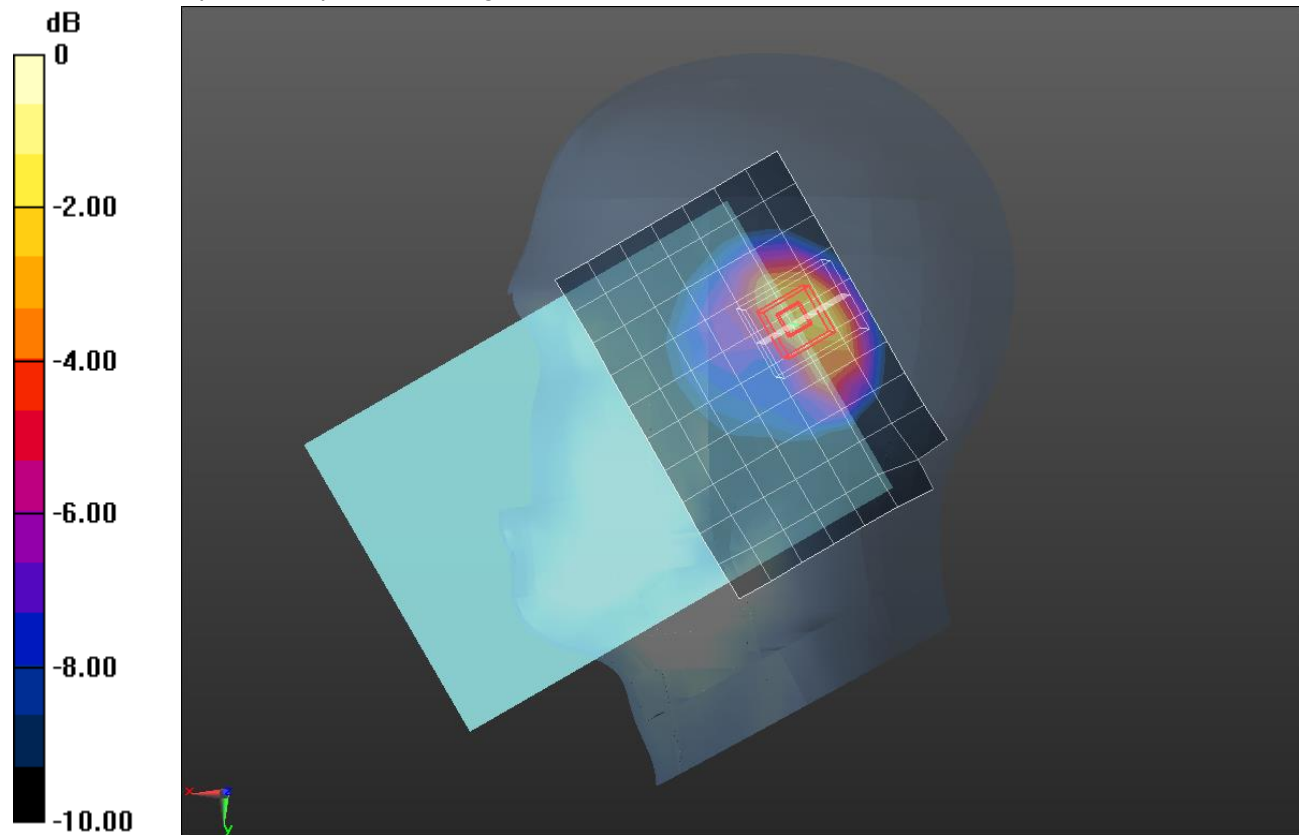

0 dB = 0.128 W/kg = -8.93 dBW/kg

LTE Band 17_Reduced

Frequency: 710 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 710 \text{ MHz}$; $\sigma = 0.933 \text{ S/m}$; $\epsilon_r = 56.129$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1446; Calibrated: 2014-08-27
- Probe: EX3DV4 - SN7323; ConvF(10.26, 10.26, 10.26); Calibrated: 2014-12-05;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI Phantom v5.0; Type: QDOVA002AA; Serial: TP:2001

Edge 1/QPSK RB 1/0 ch 23790/Area Scan (5x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.448 W/kg

Edge 1/QPSK RB 1/0 ch 23790/Zoom Scan (5x8x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.38 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.838 W/kg

SAR(1 g) = 0.342 W/kg; SAR(10 g) = 0.182 W/kg

Maximum value of SAR (measured) = 0.489 W/kg


Edge 1/QPSK RB 1/0 ch 23790/Zoom Scan 2 (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.38 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.688 W/kg

SAR(1 g) = 0.345 W/kg; SAR(10 g) = 0.183 W/kg

Maximum value of SAR (measured) = 0.493 W/kg

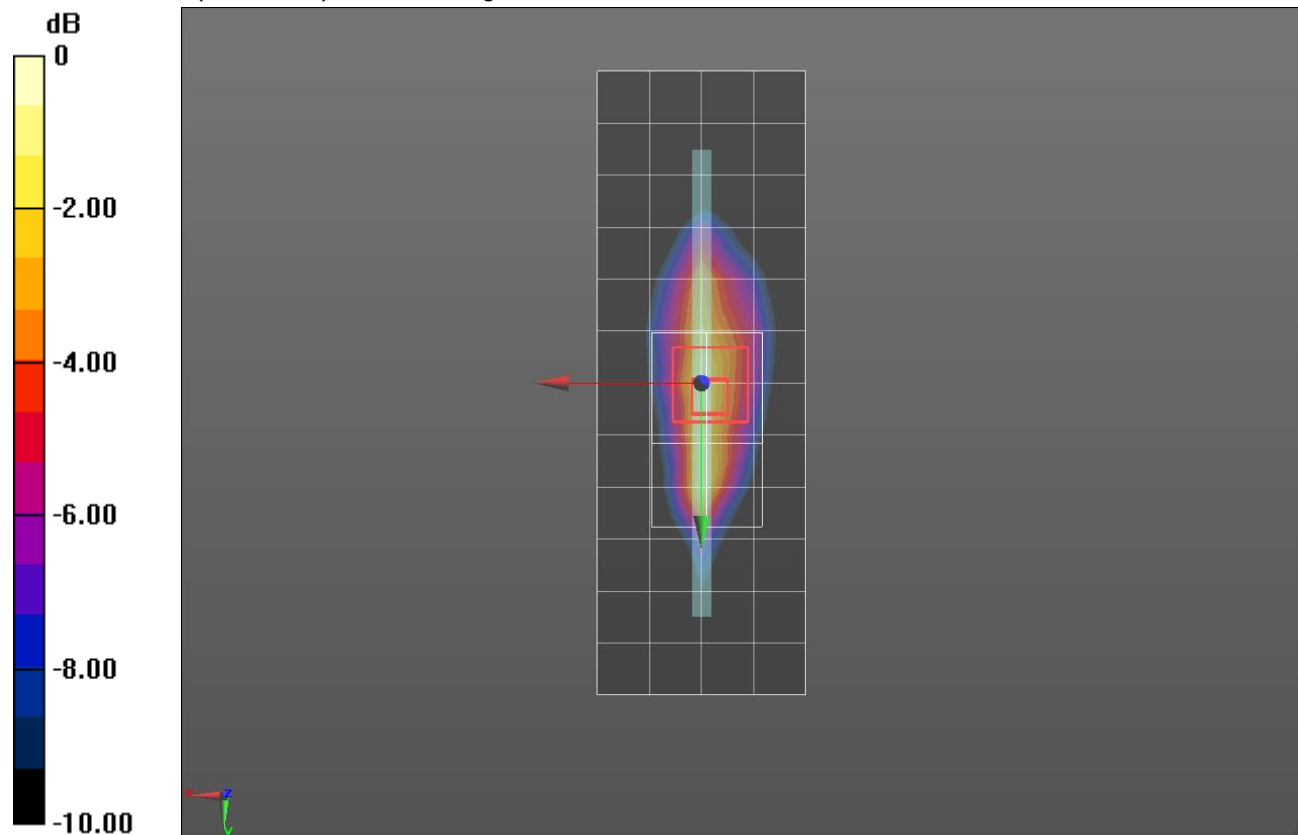

0 dB = 0.493 W/kg = -3.07 dBW/kg

Wi-Fi 2.4GHz

Frequency: 2437 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.833$ S/m; $\epsilon_r = 38.154$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2015-01-12
- Probe: EX3DV4 - SN7330; ConvF(7.21, 7.21, 7.21); Calibrated: 2015-02-12;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM Phantom CRP v5.0(Middle); Type: QD000P40CD; Serial: TP:1854

Head/802.11b_ch 6 SISO Chan 0/Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.340 W/kg


Head/802.11b_ch 6 SISO Chan 0/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.85 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.539 W/kg

SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.127 W/kg

Maximum value of SAR (measured) = 0.380 W/kg

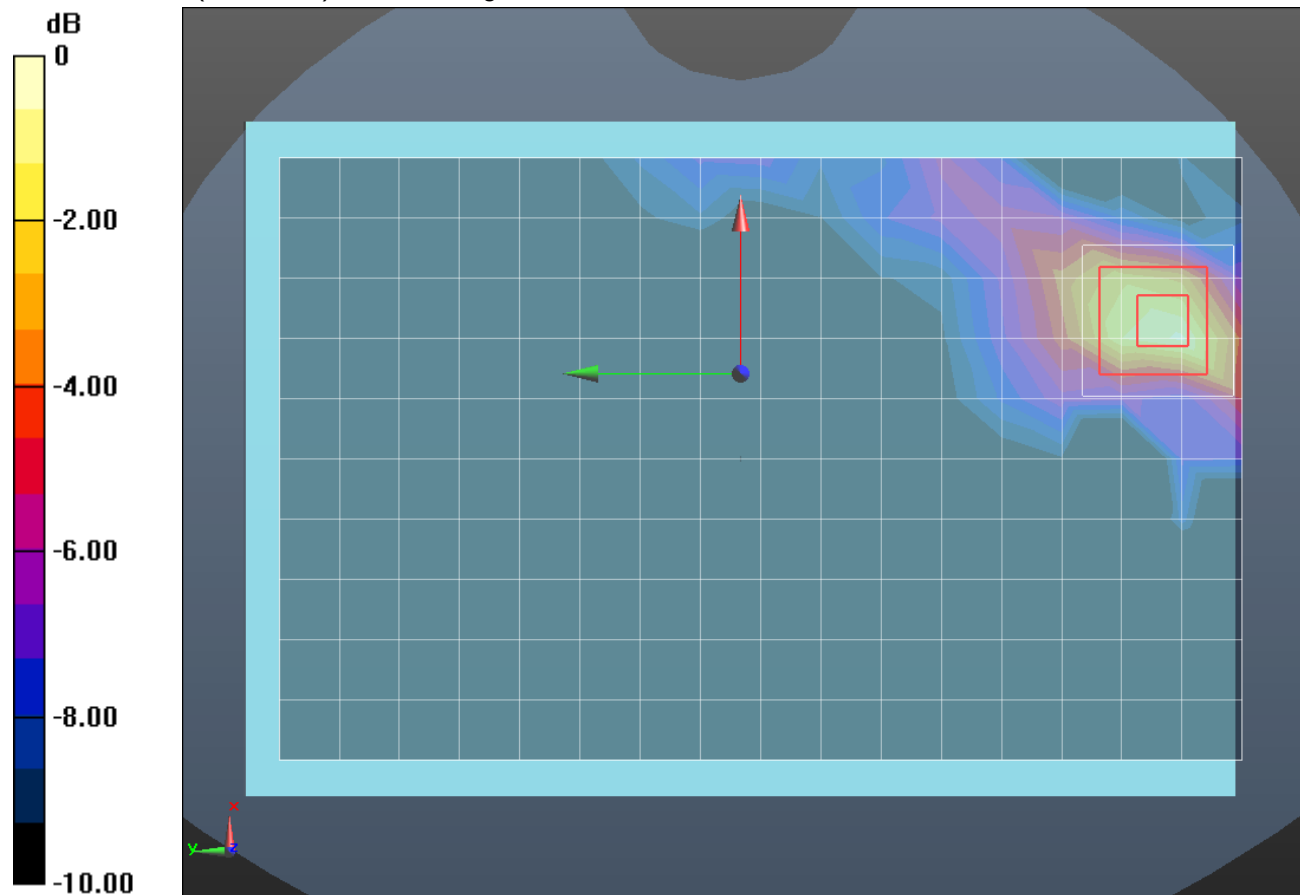

0 dB = 0.380 W/kg = -4.20 dBW/kg

Wi-Fi 2.4GHz_Reduced

Frequency: 2437 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2.015$ S/m; $\epsilon_r = 50.695$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2015-01-12
- Probe: EX3DV4 - SN7330; ConvF(7.32, 7.32, 7.32); Calibrated: 2015-02-12;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:2013

Rear(Dist 0mm)/802.11b_ch 6 SISO Chan 0/Area Scan (8x7x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.823 W/kg


Rear(Dist 0mm)/802.11b_ch 6 SISO Chan 0/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.00 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.63 W/kg

SAR(1 g) = 0.746 W/kg; SAR(10 g) = 0.261 W/kg.

Maximum value of SAR (measured) = 1.21 W/kg

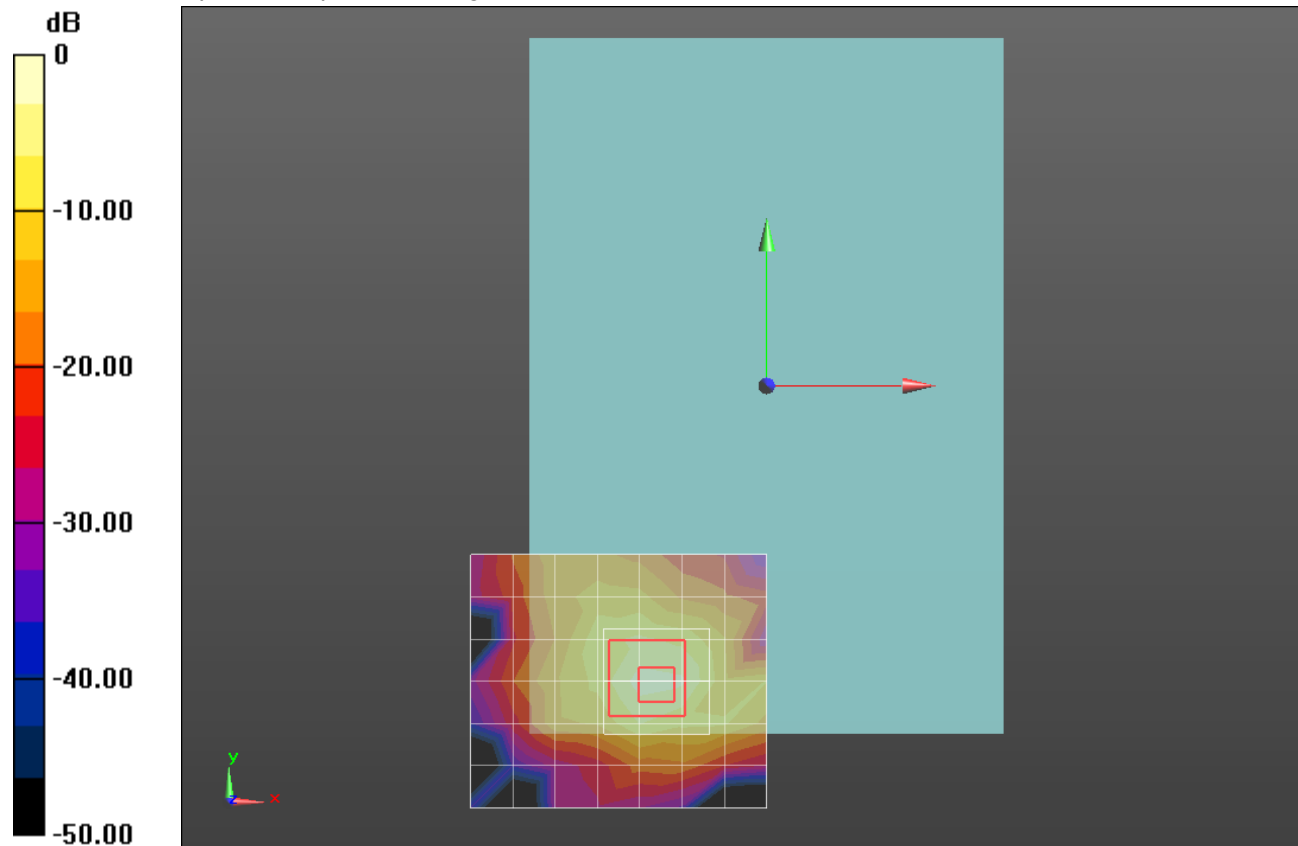

0 dB = 1.21 W/kg = 0.83 dBW/kg

Wi-Fi 5GHz

Frequency: 5300 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 5300$ MHz; $\sigma = 4.546$ S/m; $\epsilon_r = 34.629$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2015-01-12
- Probe: EX3DV4 - SN7330; ConvF(5.07, 5.07, 5.07); Calibrated: 2015-02-12;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx

Head for UNII-2A/802.11b_ch 6 SISO Chan 0/Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.125 W/kg


Head for UNII-2A/802.11b_ch 6 SISO Chan 0/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.575 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.296 W/kg

SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.159 W/kg

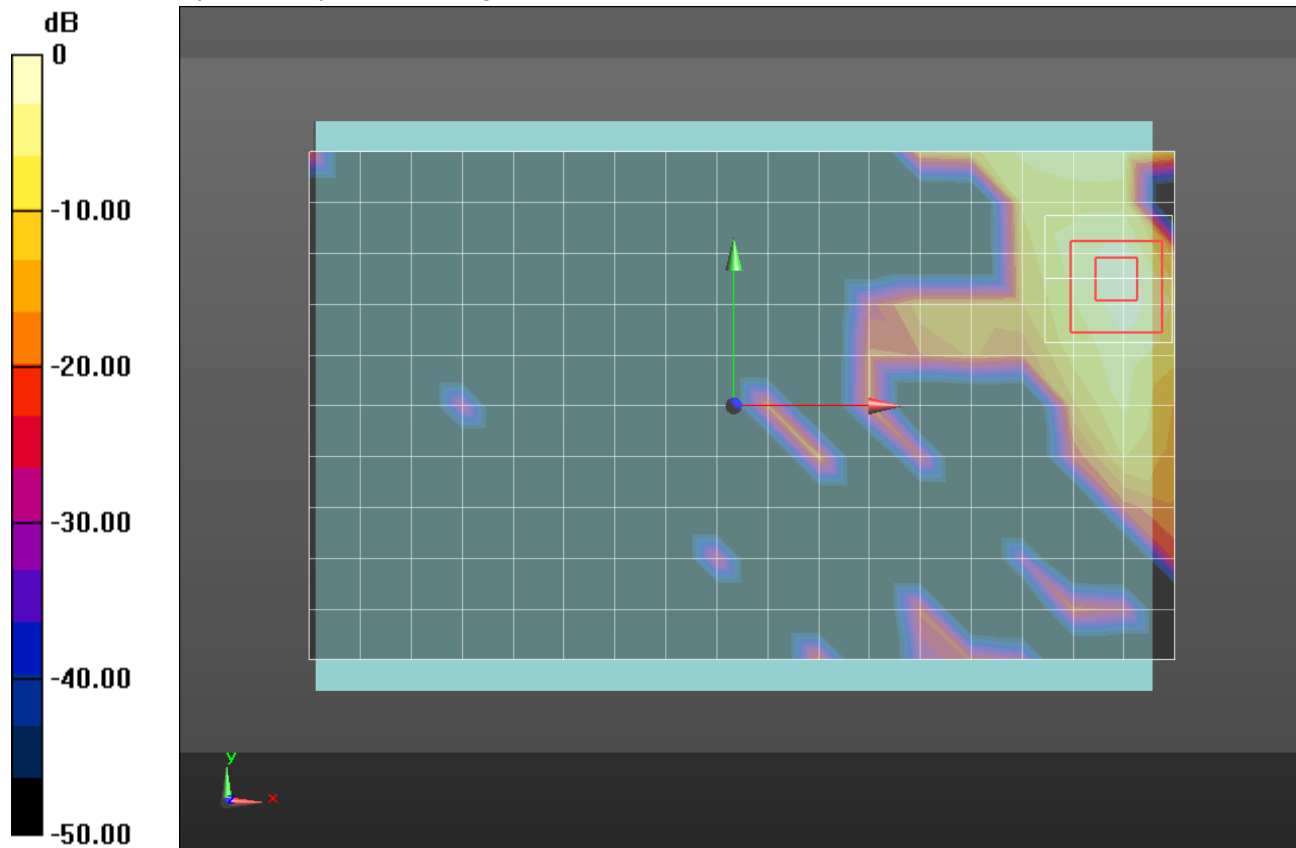

Wi-Fi 5.3GHz_MIMO_Reduced

Frequency: 5290 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 5290$ MHz; $\sigma = 5.538$ S/m; $\epsilon_r = 48.321$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2015-01-12
- Probe: EX3DV4 - SN7330; ConvF(4.4, 4.4, 4.4); Calibrated: 2015-02-12;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:2013

Rear/802.11ac_ch 58 Ant1+2 2/Area Scan (15x9x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.01 W/kg

Rear/802.11ac_ch 58 Ant1+2 2/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 14.45 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 5.87 W/kg

SAR(1 g) = 0.935 W/kg; SAR(10 g) = 0.211 W/kg

Maximum value of SAR (measured) = 2.09 W/kg


Rear/802.11ac_ch 58 Ant1+2 2/Zoom Scan 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 14.45 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.324 W/kg

SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.161 W/kg

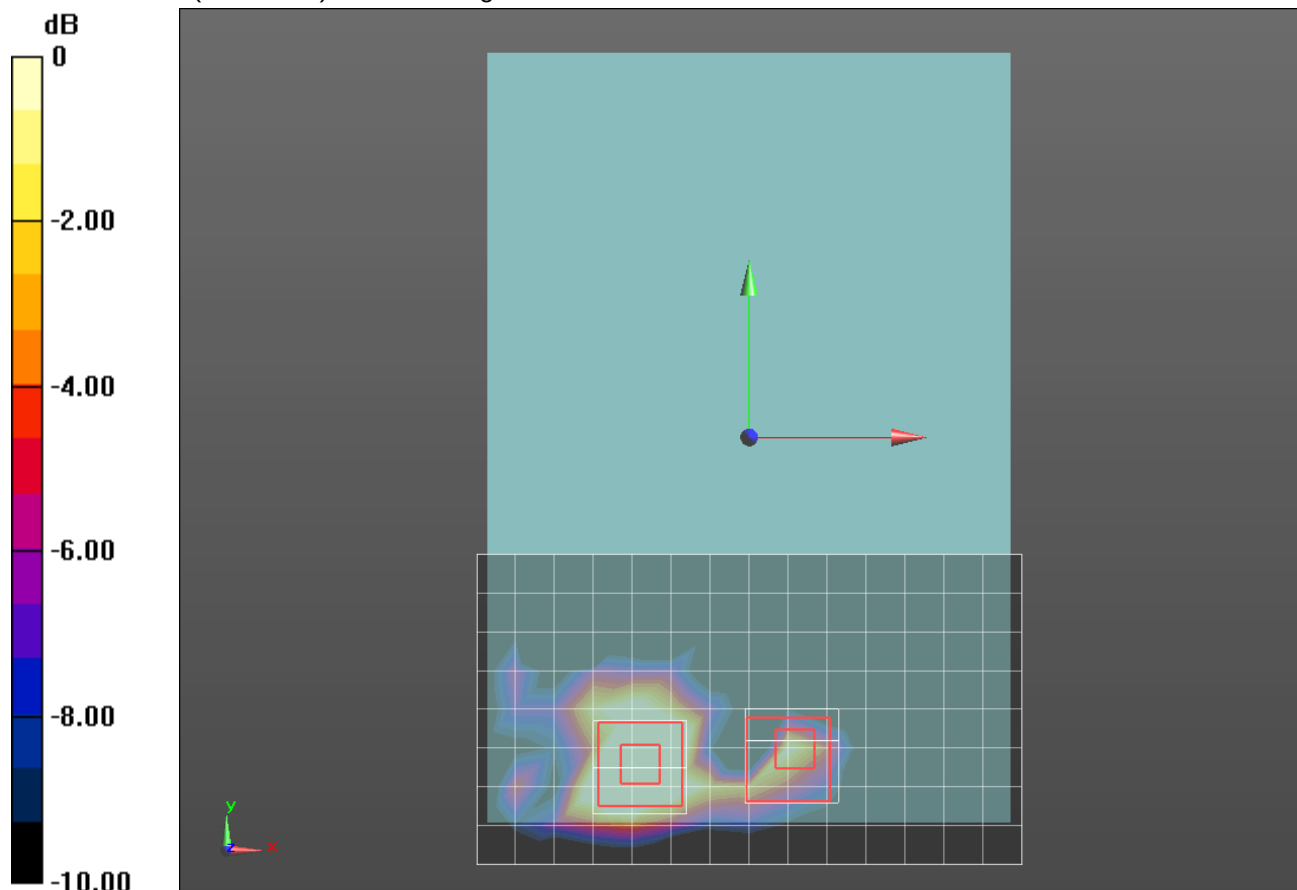

0 dB = 0.161 W/kg = -7.93 dBW/kg

Wi-Fi 5GHz

Frequency: 5580 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 5580$ MHz; $\sigma = 4.827$ S/m; $\epsilon_r = 34.267$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2015-01-12
- Probe: EX3DV4 - SN7330; ConvF(4.62, 4.62, 4.62); Calibrated: 2015-02-12;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx

Head for UNII-2C/802.11a_ch 116 SISO Chan 0/Area Scan (13x18x1): Measurement grid:

dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.127 W/kg

Head for UNII-2C/802.11a_ch 116 SISO Chan 0/Zoom Scan (9x9x12)/Cube 0: Measurement


grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.599 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.388 W/kg

SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.200 W/kg

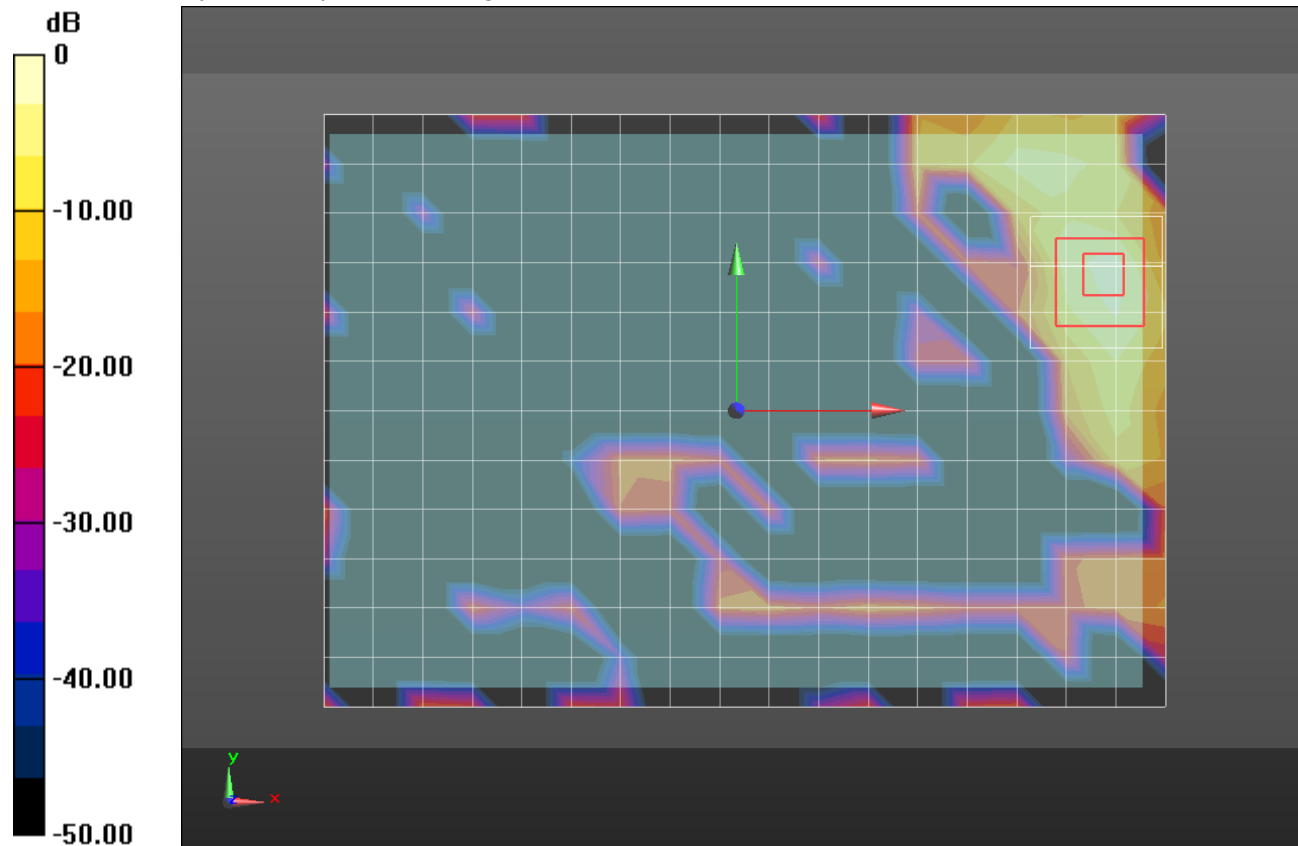

0 dB = 0.200 W/kg = -6.99 dBW/kg

Wi-Fi 5.5GHz_MIMO_Reduced

Frequency: 5530 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 5530$ MHz; $\sigma = 5.854$ S/m; $\epsilon_r = 47.906$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2015-01-12
- Probe: EX3DV4 - SN7330; ConvF(3.9, 3.9, 3.9); Calibrated: 2015-02-12;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:2013

Rear/802.11ac_ch 106 Ant1+2/Area Scan (15x9x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.62 W/kg

Rear/802.11ac_ch 106 Ant1+2/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 18.06 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 6.17 W/kg

SAR(1 g) = 0.963 W/kg; SAR(10 g) = 0.204 W/kg

Maximum value of SAR (measured) = 2.08 W/kg


Rear/802.11ac_ch 106 Ant1+2/Zoom Scan 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 18.06 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.811 W/kg

SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.017 W/kg.

Maximum value of SAR (measured) = 0.127 W/kg

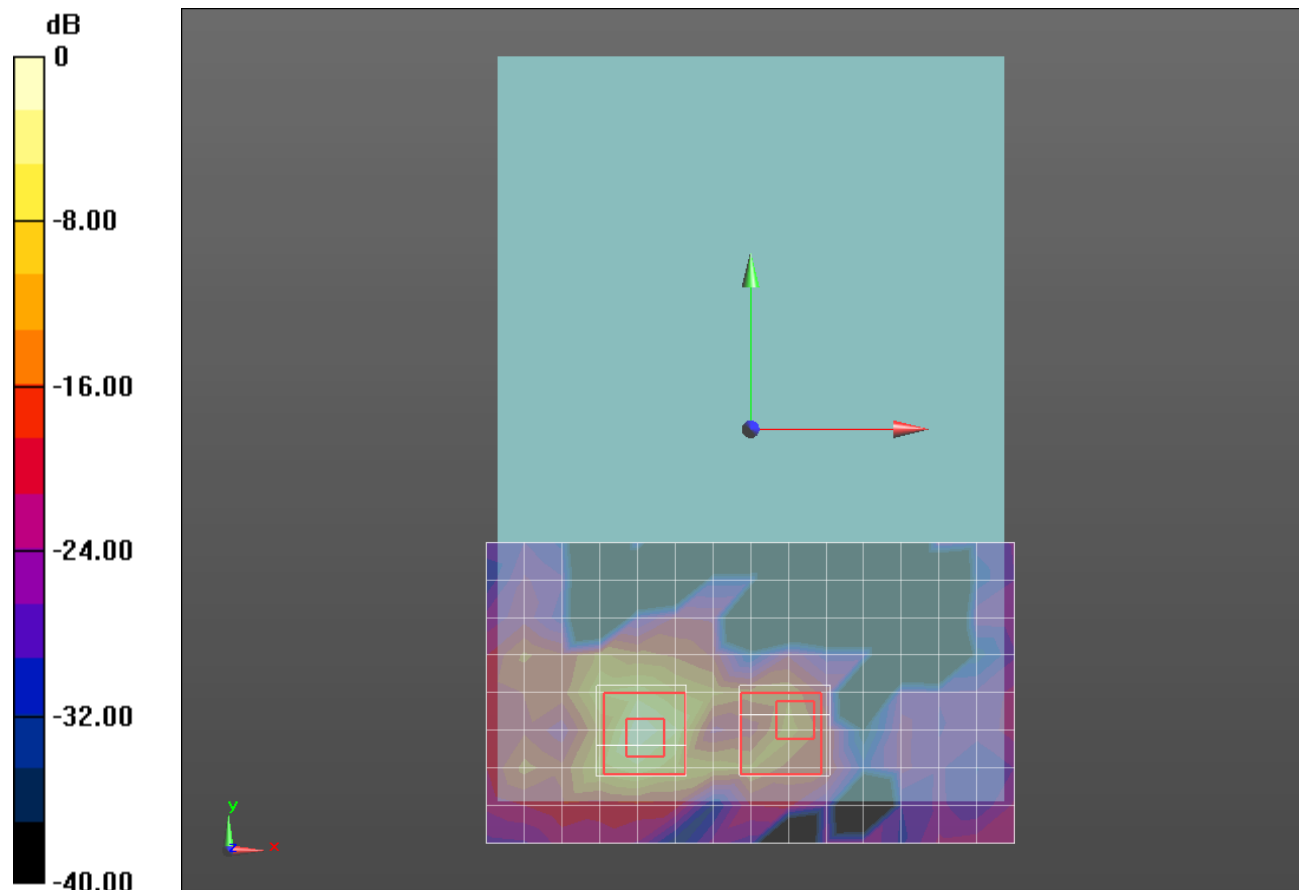

0 dB = 1.62 W/kg = 2.10 dBW/kg

Wi-Fi 5.8GHz_reduced

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 5775$ MHz; $\sigma = 6.228$ S/m; $\epsilon_r = 47.214$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2015-01-12
- Probe: EX3DV4 - SN7330; ConvF(4.09, 4.09, 4.09); Calibrated: 2015-02-12;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

Rear(Dist 0mm)/802.11ac_ch 155 SISO Chan 0 PWR 8/Area Scan (9x8x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.762 W/kg

Rear(Dist 0mm)/802.11ac_ch 155 SISO Chan 0 PWR 8/Zoom Scan (9x9x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 11.61 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 5.00 W/kg

SAR(1 g) = 0.730 W/kg; SAR(10 g) = 0.152 W/kg

Maximum value of SAR (measured) = 2.04 W/kg

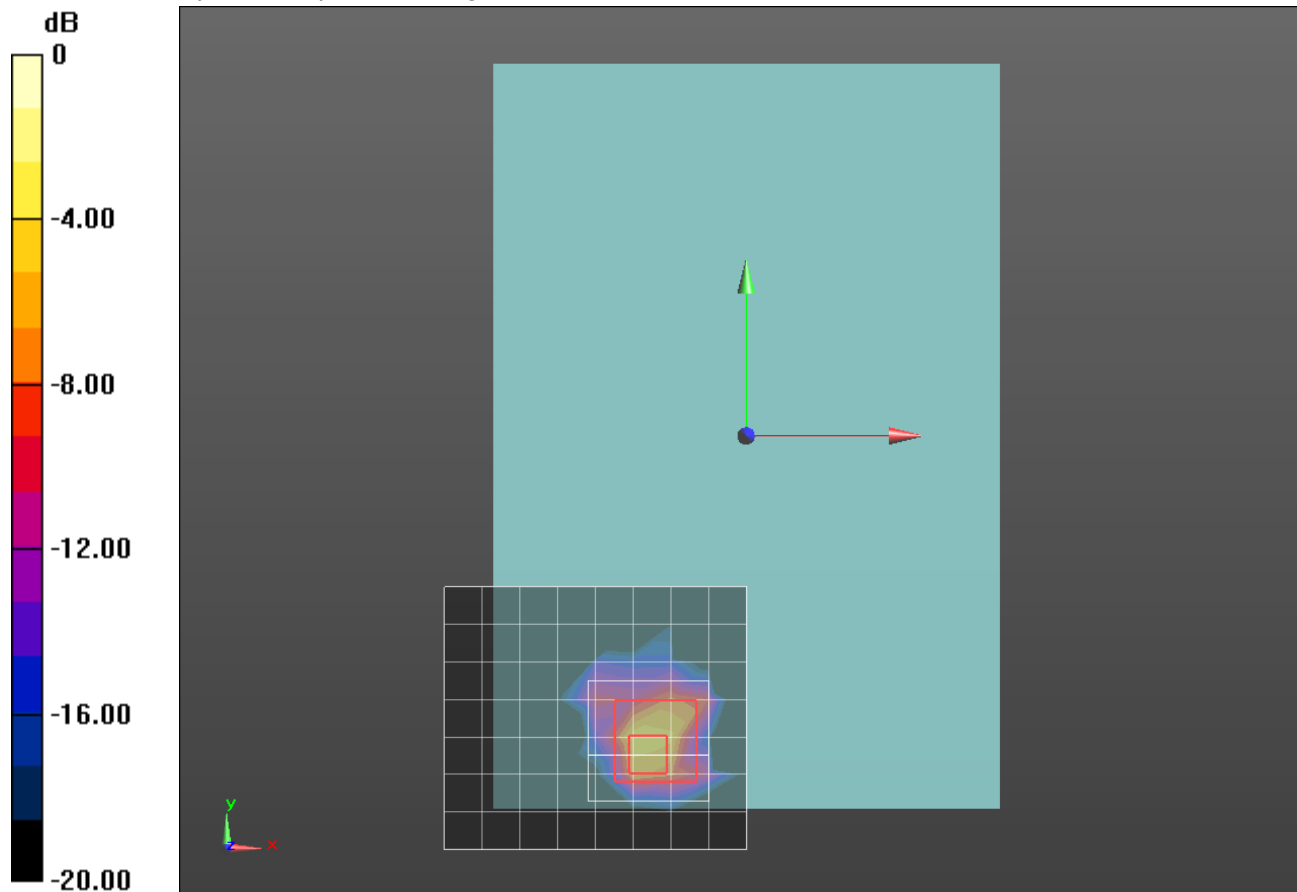

0 dB = 2.04 W/kg = 3.10 dBW/kg

Wi-Fi 5GHz_MIMO_Head

Frequency: 5825 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 5825$ MHz; $\sigma = 5.267$ S/m; $\epsilon_r = 35.993$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2015-01-12
- Probe: EX3DV4 - SN7330; ConvF(4.53, 4.53, 4.53); Calibrated: 2015-02-12;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx

Head for UNII-3/802.11n_ch 165 MIMO/Area Scan (13x19x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0566 W/kg

Head for UNII-3/802.11n_ch 165 MIMO/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.280 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.346 W/kg

SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.023 W/kg.

Maximum value of SAR (measured) = 0.0724 W/kg


Head for UNII-3/802.11n_ch 165 MIMO/Zoom Scan 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.280 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0580 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0298 W/kg

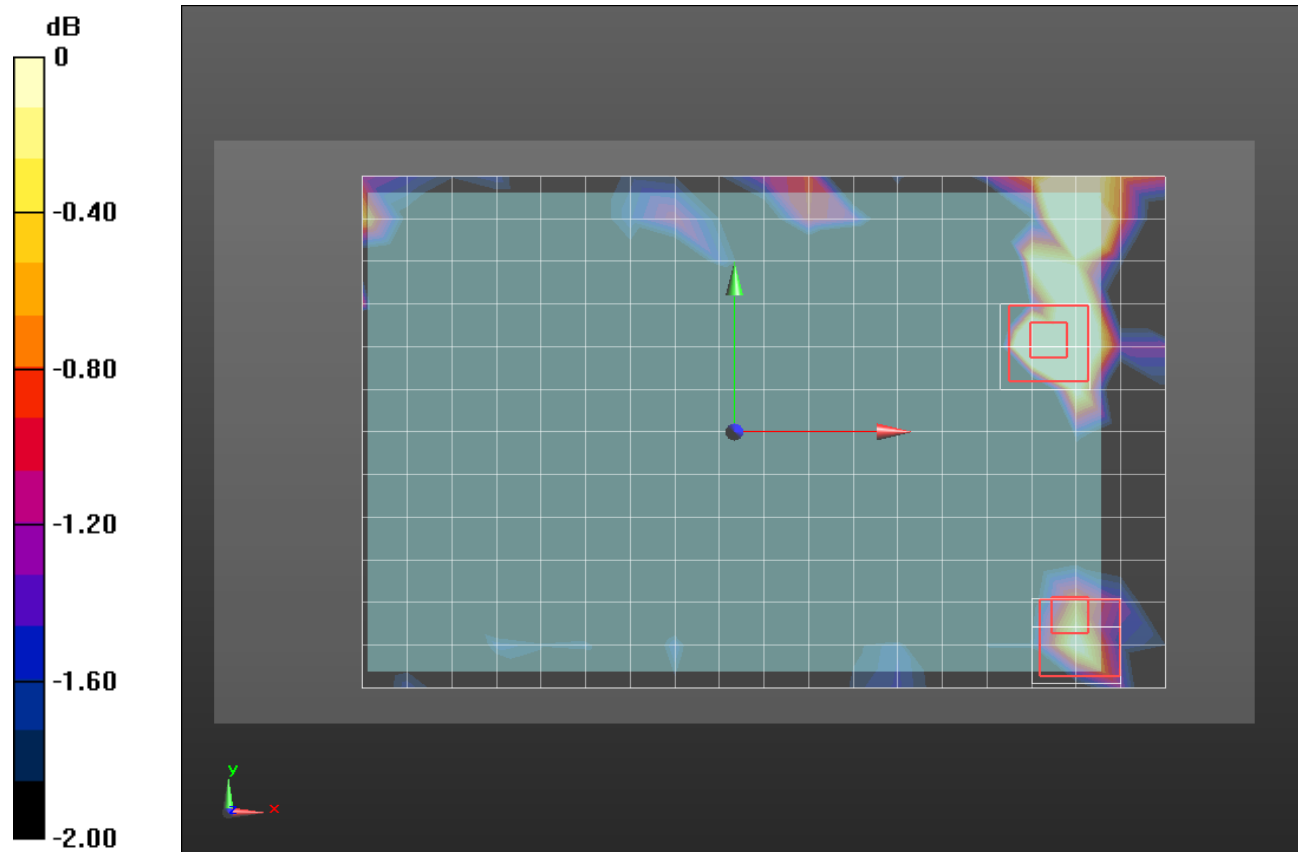

0 dB = 0.0298 W/kg = -15.26 dBW/kg

Bluetooth_0430

Frequency: 2441 MHz; Duty Cycle: 1:1.29033; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 2.024$ S/m; $\epsilon_r = 50.708$; $\rho = 1000$ kg/m³
DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1446; Calibrated: 2014-08-27
- Probe: EX3DV4 - SN7323; ConvF(7.3, 7.3, 7.3); Calibrated: 2014-12-05;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI Phantom v5.0; Type: QDOVA002AA; Serial: TP:2001

Rear(Dist 9mm)/Bluetooth GFSK_ch39 /Area Scan (8x6x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.251 W/kg


Rear(Dist 9mm)/Bluetooth GFSK_ch39 /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.37 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.822 W/kg

SAR(1 g) = 0.234 W/kg; SAR(10 g) = 0.083 W/kg

Maximum value of SAR (measured) = 0.463 W/kg

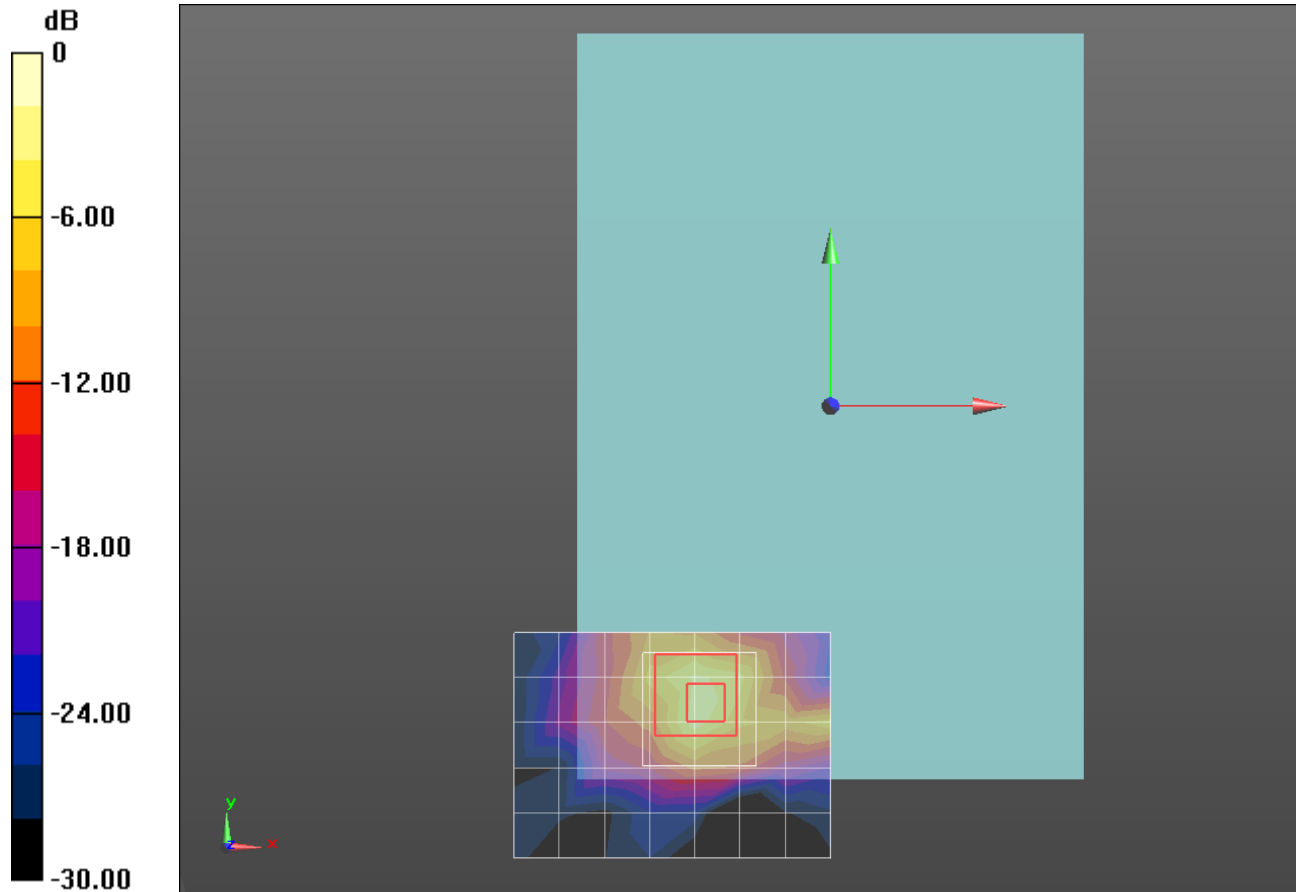

0 dB = 0.463 W/kg = -3.34 dBW/kg