



FCC CFR47 PART 15 SUBPART C

DTS Wireless LAN

CERTIFICATION TEST REPORT

FOR

GSM/CDMA/WCDMA/LTE Tablet + BT/BLE, DTS/UNII a/b/g/n/ac and ANT+

MODEL NUMBER : SM-T819C

FCC ID: A3LSMT819C

REPORT NUMBER: 16K23301-E1V3

ISSUE DATE: MAY 12, 2016

Prepared for

**SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA**

Prepared by

**UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433**



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	05/05/16	Initial issue	SungGil Park
V2	05/09/16	Section 5.2 & 7 & 10.3 & 11 Revised.	SungGil Park
V3	05/12/16	Section 9 Revised.	SungGil Park

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY	7
5. EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF EUT	8
5.2. MAXIMUM OUTPUT POWER	9
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	9
5.4. LIST OF TEST REDUCTION AND MODES	9
5.5. WORST-CASE CONFIGURATION AND MODE	9
5.6. DESCRIPTION OF TEST SETUP	10
6. TEST AND MEASUREMENT EQUIPMENT	12
7. MEASUREMENT METHODS	13
8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS	13
8.1. ON TIME AND DUTY CYCLE RESULTS	13
9. SUMMARY TABLE	14
10. ANTENNA PORT TEST RESULTS	15
10.1. 6 dB BANDWIDTH	15
10.1.1. 802.11b MODE IN THE 2.4 GHz BAND	16
10.1.2. 802.11g MODE IN THE 2.4 GHz BAND	16
10.1.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND	16
10.1.4. 6 dB BANDWIDTH PLOTS	17
10.2. 99% BANDWIDTH	20
10.2.1. 802.11b MODE IN THE 2.4 GHz BAND	20
10.2.2. 802.11g MODE IN THE 2.4 GHz BAND	20
10.2.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND	20
10.2.4. 99% BANDWIDTH PLOTS	20
10.3. OUTPUT POWER	24
10.3.1. 802.11b MODE IN THE 2.4 GHz BAND	25

10.3.2.	802.11g MODE IN THE 2.4 GHz BAND	26
10.3.3.	802.11n HT20 MODE IN THE 2.4 GHz BAND	27
10.4.	<i>PSD</i>	28
10.4.1.	802.11b MODE IN THE 2.4 GHz BAND	28
10.4.2.	802.11g MODE IN THE 2.4 GHz BAND	28
10.4.3.	802.11n HT20 MODE IN THE 2.4 GHz BAND	29
10.4.4.	PSD PLOTS	30
10.5.	<i>OUT-OF-BAND EMISSIONS</i>	33
10.5.1.	802.11b MODE IN THE 2.4 GHz BAND	34
10.5.2.	802.11g MODE IN THE 2.4 GHz BAND	36
10.5.3.	802.11n HT20 MODE IN THE 2.4 GHz BAND	38
11.	RADIATED TEST RESULTS	40
11.1.	<i>LIMITS AND PROCEDURE</i>	40
11.2.	<i>TRANSMITTER ABOVE 1 GHz</i>	41
11.2.1.	TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND	41
11.2.2.	TX ABOVE 1 GHz 802.11g 2TX CDD MODE IN THE 2.4 GHz BAND	51
11.2.3.	TX ABOVE 1 GHz 802.11n HT20 2TX CDD MODE IN THE 2.4 GHz BAND	61
11.3.	<i>WORST-CASE BELOW 1 GHz</i>	71
12.	AC POWER LINE CONDUCTED EMISSIONS	73
13.	SETUP PHOTOS	76

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM/CDMA/WCDMA/LTE Tablet + BT/BLE, DTS/UNII a/b/g/n/ac and ANT+
MODEL NUMBER: SM-T819C
SERIAL NUMBER: R22H3017QQT (RADIATED);
R22H400NY5B (CONDUCTED)
DATE TESTED: APR 15, 2016 - MAY 05, 2016

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



CY Choi
Suwon Lab Engineer
UL Korea, Ltd.

Tested By:



SungGil Park
Suwon Lab Engineer
UL Korea, Ltd.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro
☒ Chamber 1
☒ Chamber 2

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	4.14 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/CDMA/WCDMA/LTE Tablet + BT/BLE, DTS/UNII a/b/g/n/ac and ANT+

This test report addresses the DTS (WLAN) operational mode.

WiFi MIMO Condition

Frequency	Mode	Antenna 1	Antenna 2
2.4 GHz	802.11b	TX / RX	TX / RX
	802.11g	TX / RX	TX / RX
	802.11n	TX / RX	TX / RX
	802.11n MIMO	TX / RX	TX / RX
5 GHz	802.11a	TX / RX	TX / RX
	802.11n	TX / RX	TX / RX
	802.11ac	TX / RX	TX / RX
	802.11n/ac MIMO	TX / RX	TX / RX

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

Frequency Range [MHz]	Mode	Output Power [dBm]		Output Power [mW]	
		Antenna1	Antenna2	Antenna1	Antenna2
2412 - 2462	802.11b	16.06	16.30	40.36	42.66
	802.11g	15.38	15.40	34.51	34.67
	802.11g MIMO	18.18		65.70	
	802.11n SISO	14.48	14.24	28.05	26.55
	802.11n MIMO	17.32		54.00	

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes FPCB antennas, with a antenna1's maximum gain of -3.35 dBi and antenna2's maximum gain of -3.87 dBi .

5.4. LIST OF TEST REDUCTION AND MODES

The output power on covered modes is equal to or less than one referenced.

2400 - 2483.5 MHz Authorized Frequency Band (Radiated Testing)		
Frequency Range (MHz)	Mode	Covered by
2412 - 2462	802.11b Legacy 1TX	802.11b Legacy 1TX
	802.11g Legacy 1TX	802.11g CDD 2TX
	802.11n 1TX	802.11n HT20 CDD 2TX
	802.11n STBC 2TX	802.11n HT20 CDD 2TX

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

Based on the baseline scan, the worst-case data rates were:

802.11b mode: 1 Mbps (Legacy 1TX)
802.11g mode: 6 Mbps (CDD 2TX)
802.11n HT20 mode: MCS0 (CDD 2TX)

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA12CBC	DW2H229DS/B-E	N/A
Data Cable	SAMSUNG	EP-DG925UWE	N/A	N/A
Earphone	SAMSUNG	EO-EG900BW	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	0.8m	N/A
2	Audio	1	Mini-Jack	Unshielded	1.0m	N/A

TEST SETUP

The EUT is a stand-alone unit during the tests.
Test software in hidden menu exercised the EUT to enable DTS mode.

SETUP DIAGRAM FOR TESTS

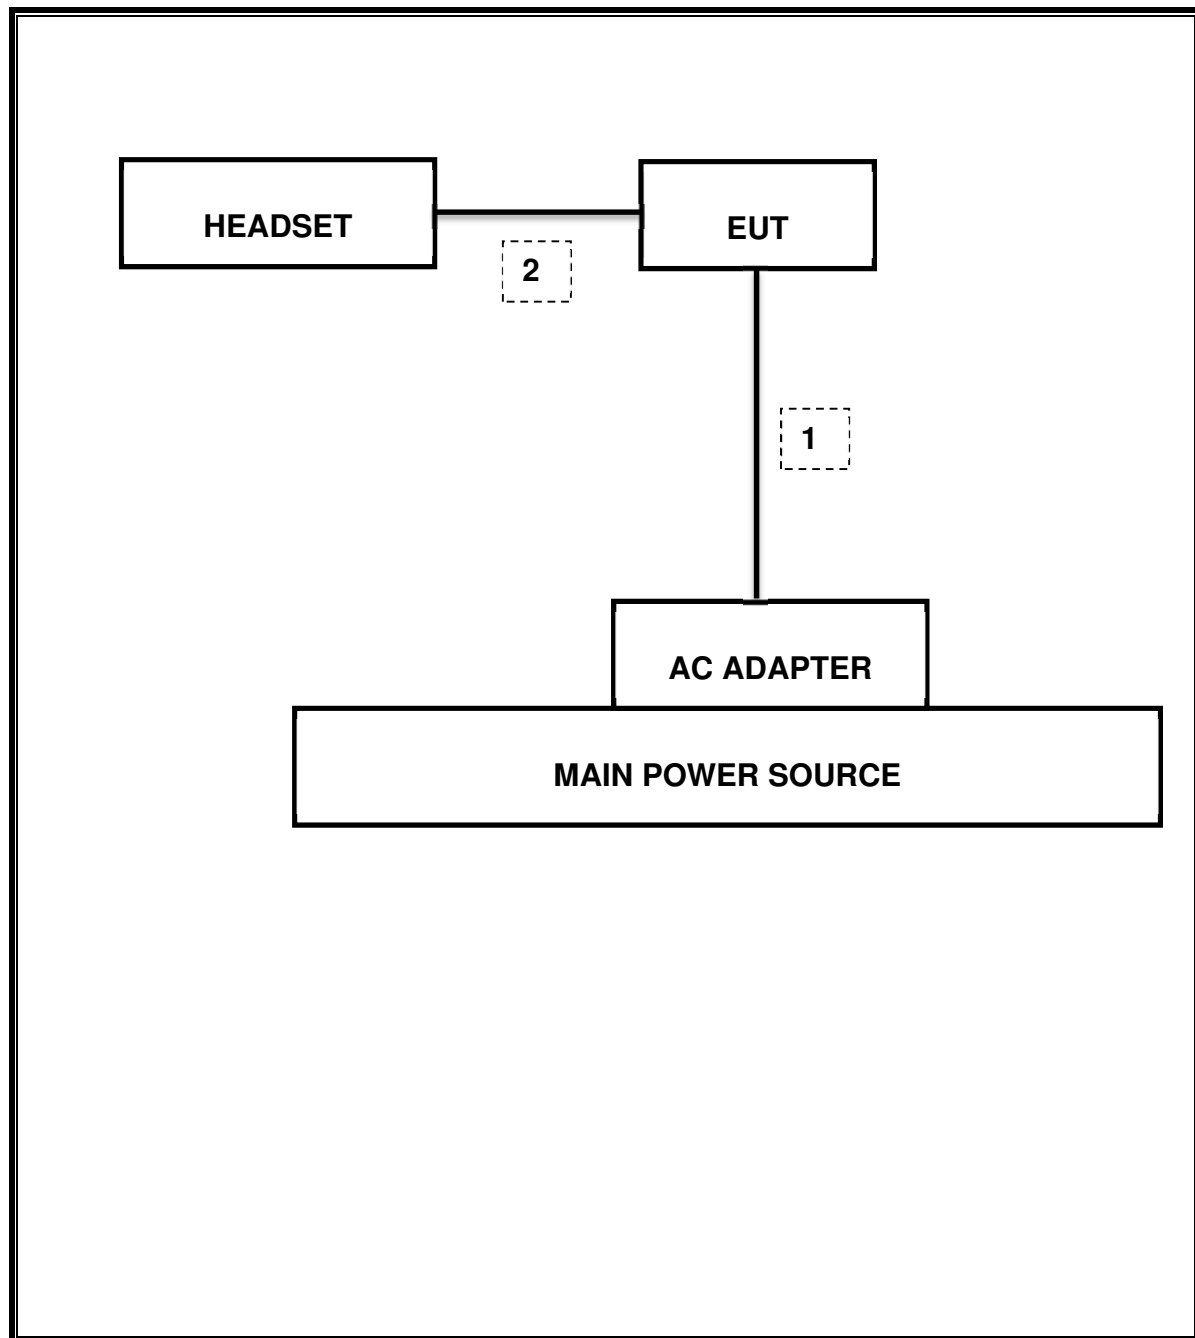

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	11-17-16
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	04-25-17
Antenna, Horn, 18 GHz	ETS	3115	00167211	09-26-16
Antenna, Horn, 18 GHz	ETS	3115	00161451	05-17-17
Antenna, Horn, 18 GHz	ETS	3117	00168724	06-17-17
Antenna, Horn, 18 GHz	ETS	3117	00168717	06-17-17
Antenna, Horn, 40 GHz	ETS	3116C	00166155	09-23-16
Antenna, Horn, 40 GHz	ETS	3116C-PA	00168841	08-24-17
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-18-16
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-18-16
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	08-18-16
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-18-16
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-19-16
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-19-16
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	08-18-16
Average Power Sensor	R&S	NRZ-Z91	102681	08-18-16
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-18-16
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-19-16
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-19-16
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-19-16
Attenuator / Switch driver	HP	11713A	3748A04272	N/A
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	009	08-18-16
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	015	08-18-16
High Pass Filter 5GHz	Micro-Tronics	HPS17542	009	08-18-16
High Pass Filter 6GHz	Micro-Tronics	HPM17543	010	08-18-16
High Pass Filter 5GHz	Micro-Tronics	HPS17542	016	08-18-16
High Pass Filter 6GHz	Micro-Tronics	HPM17543	015	08-18-16
LISN	R&S	ENV-216	101836	08-19-16
LISN	R&S	ENV-216	101837	08-19-16

7. MEASUREMENT METHODS

KDB 558074 D01 DTS Meas Guidance v03r05: Measurement Procedure §9.2.3.1 AVGPM is used for average power and §10.5 AVGPS-2 is used for power spectral density.

Unwanted emissions within Restricted Bands are measured using traditional radiated procedures.

Band edge emissions within Restricted Bands are measured using RMS with duty cycle factor offset method.


8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

LIMITS

None; for reporting purposes only.

8.1. ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B [msec]	Period [msec]	Duty Cycle x [linear]	Duty Cycle [%]	Duty Cycle Correction Factor [dB]	1/T Minimum VBW [kHz]
2400MHz Bands						
802.11b	8.623	8.725	0.988	98.8%	0.00	0.010
802.11g	1.432	1.539	0.930	93.0%	0.31	0.698
802.11n HT20	1.34	1.447	0.926	92.6%	0.33	0.746

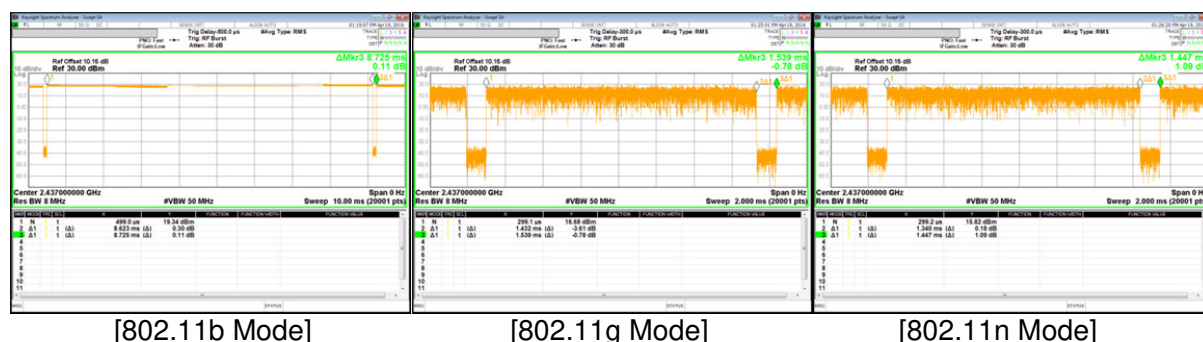

9. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result	Worst Case
15.247 (a)(2)	Occupied Band width (6dB)	>500KHz	Conducted	Pass	7.557 MHz
2.1051, 15.247 (d)	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-29.028 dBm
15.247	TX conducted output power	<30dBm		Pass	18.18 dBm (AV)
15.247	PSD	<8dBm		Pass	-14.44 dBm (AV)
15.207 (a)	AC Power Line conducted emissions	Section 10	Power Line conducted	Pass	42.69 dBuV (QP)
15.205, 15.209	Radiated Spurious Emission	< 54dBuV/m	Radiated	Pass	49.83 dBuV/m (AV)

10. ANTENNA PORT TEST RESULTS

10.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

Reference to KDB 558074 D01 DTS Meas Guidance v03r05: The transmitter output is connected to a spectrum analyzer with the RBW set to 100KHz, the VBW $\geq 3 \times$ RBW, peak detector and max hold.

RESULTS

10.1.1. 802.11b MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]		Minimum Limit [MHz]
		Primary Antenna 1	Secondary Antenna 2	
Low	2412	8.030	7.561	0.5
Mid	2437	8.043	8.057	0.5
High	2462	8.031	7.557	0.5
Worst		7.557		


10.1.2. 802.11g MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]		Minimum Limit [MHz]
		Primary Antenna 1	Secondary Antenna 2	
Low	2412	15.917	16.291	0.5
Mid	2437	16.286	16.278	0.5
High	2462	16.276	16.288	0.5
Worst		15.917		

10.1.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]		Minimum Limit [MHz]
		Chain 0	Chain 1	
Low	2412	16.301	16.517	0.5
Mid	2437	17.281	16.920	0.5
High	2462	16.782	16.750	0.5
Worst		16.301		

10.1.4. 6 dB BANDWIDTH PLOTS

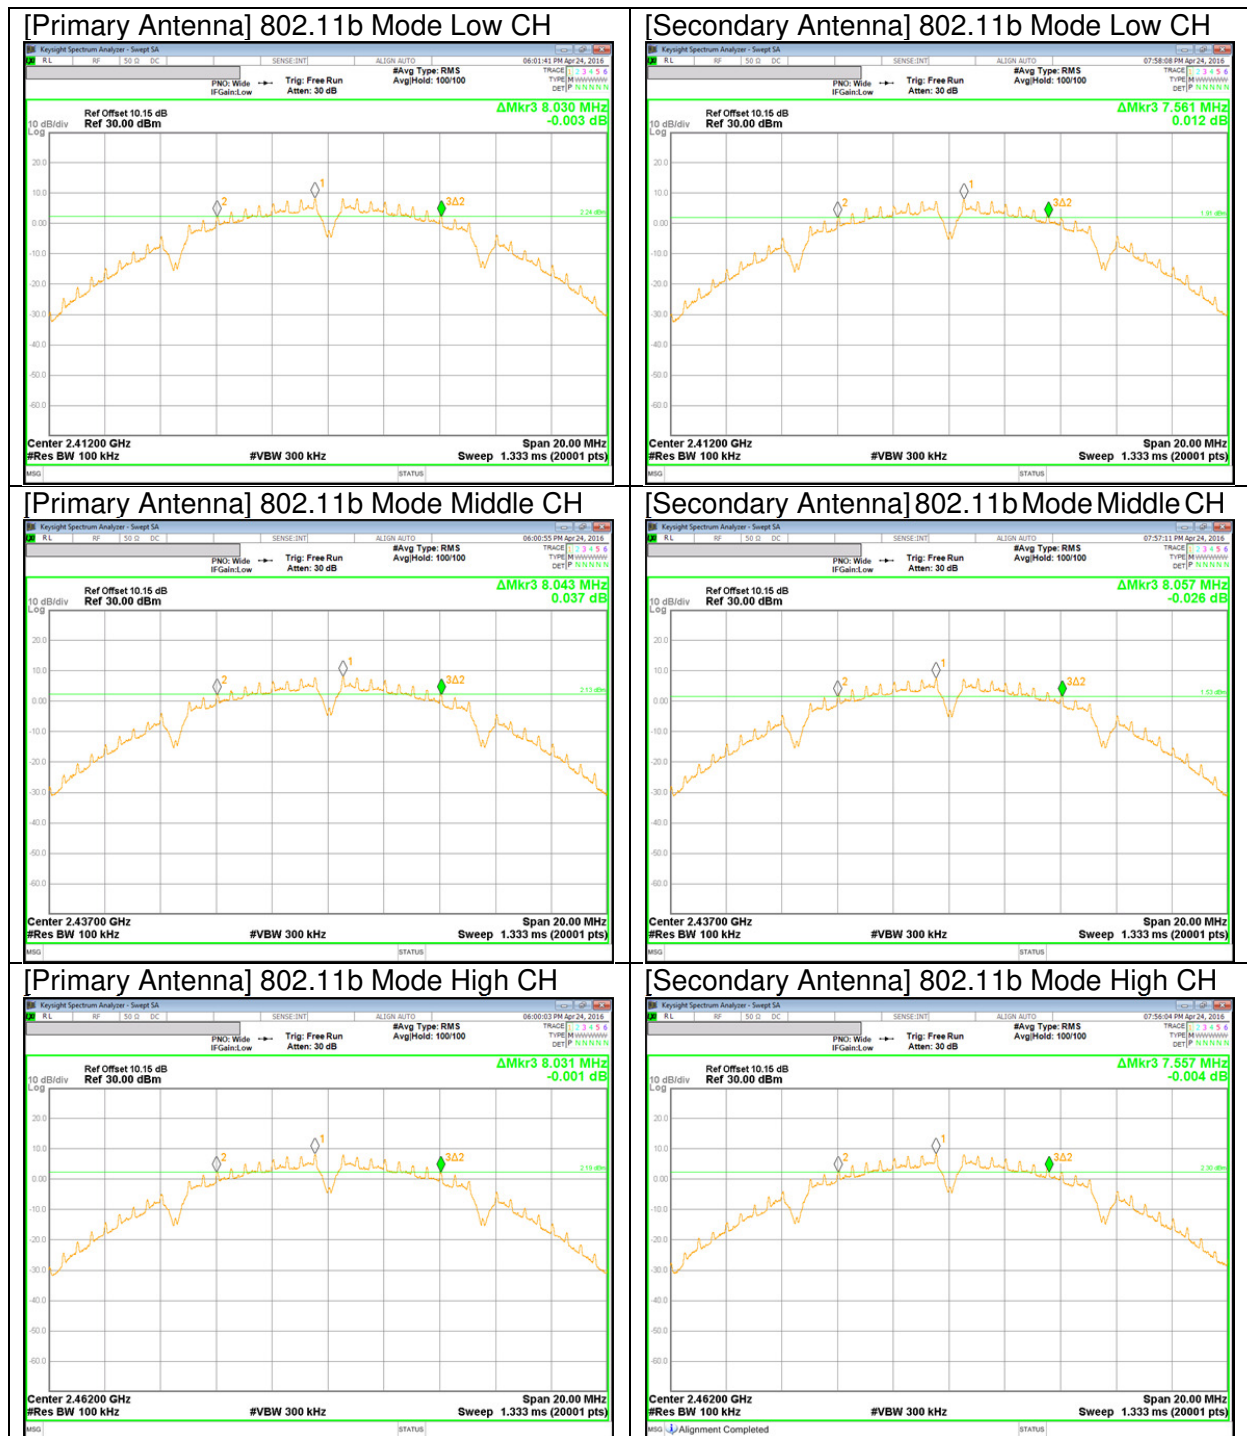





10.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

10.2.1. 802.11b MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]	
		Primary Antenna 1	Secondary Antenna 2
Low	2412	12.894	12.874
Mid	2437	13.012	12.919
High	2462	12.849	13.102

10.2.2. 802.11g MODE IN THE 2.4 GHz BAND


Channel	Frequency [MHz]	99% Bandwidth [MHz]	
		Primary Antenna 1	Secondary Antenna 2
Low	2412	16.397	16.322
Mid	2437	16.398	16.399
High	2462	16.412	16.358


10.2.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND


Channel	Frequency [MHz]	99% Bandwidth [MHz]	
		Primary Antenna 1	Secondary Antenna 2
Low	2412	17.556	17.598
Mid	2437	17.592	17.536
High	2462	17.583	17.589

10.2.4. 99% BANDWIDTH PLOTS

[Primary Antenna] 802.11b Mode Low CH	[Secondary Antenna] 802.11b Mode Low CH
---------------------------------------	---

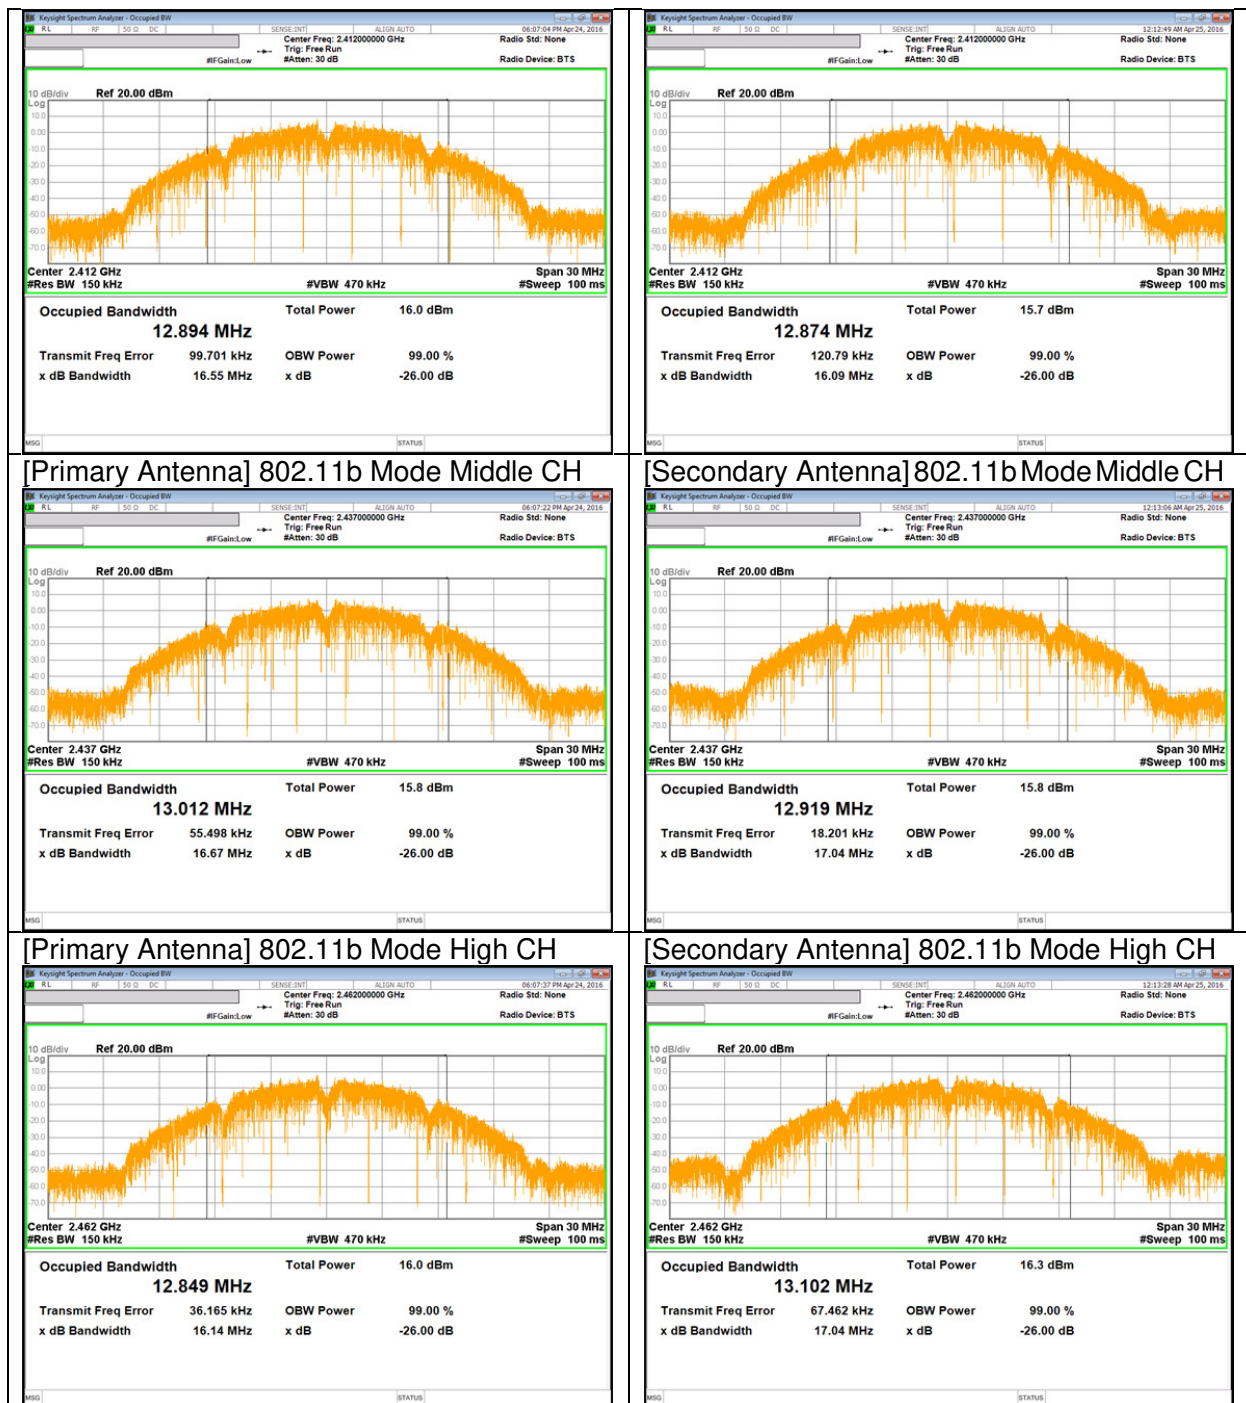

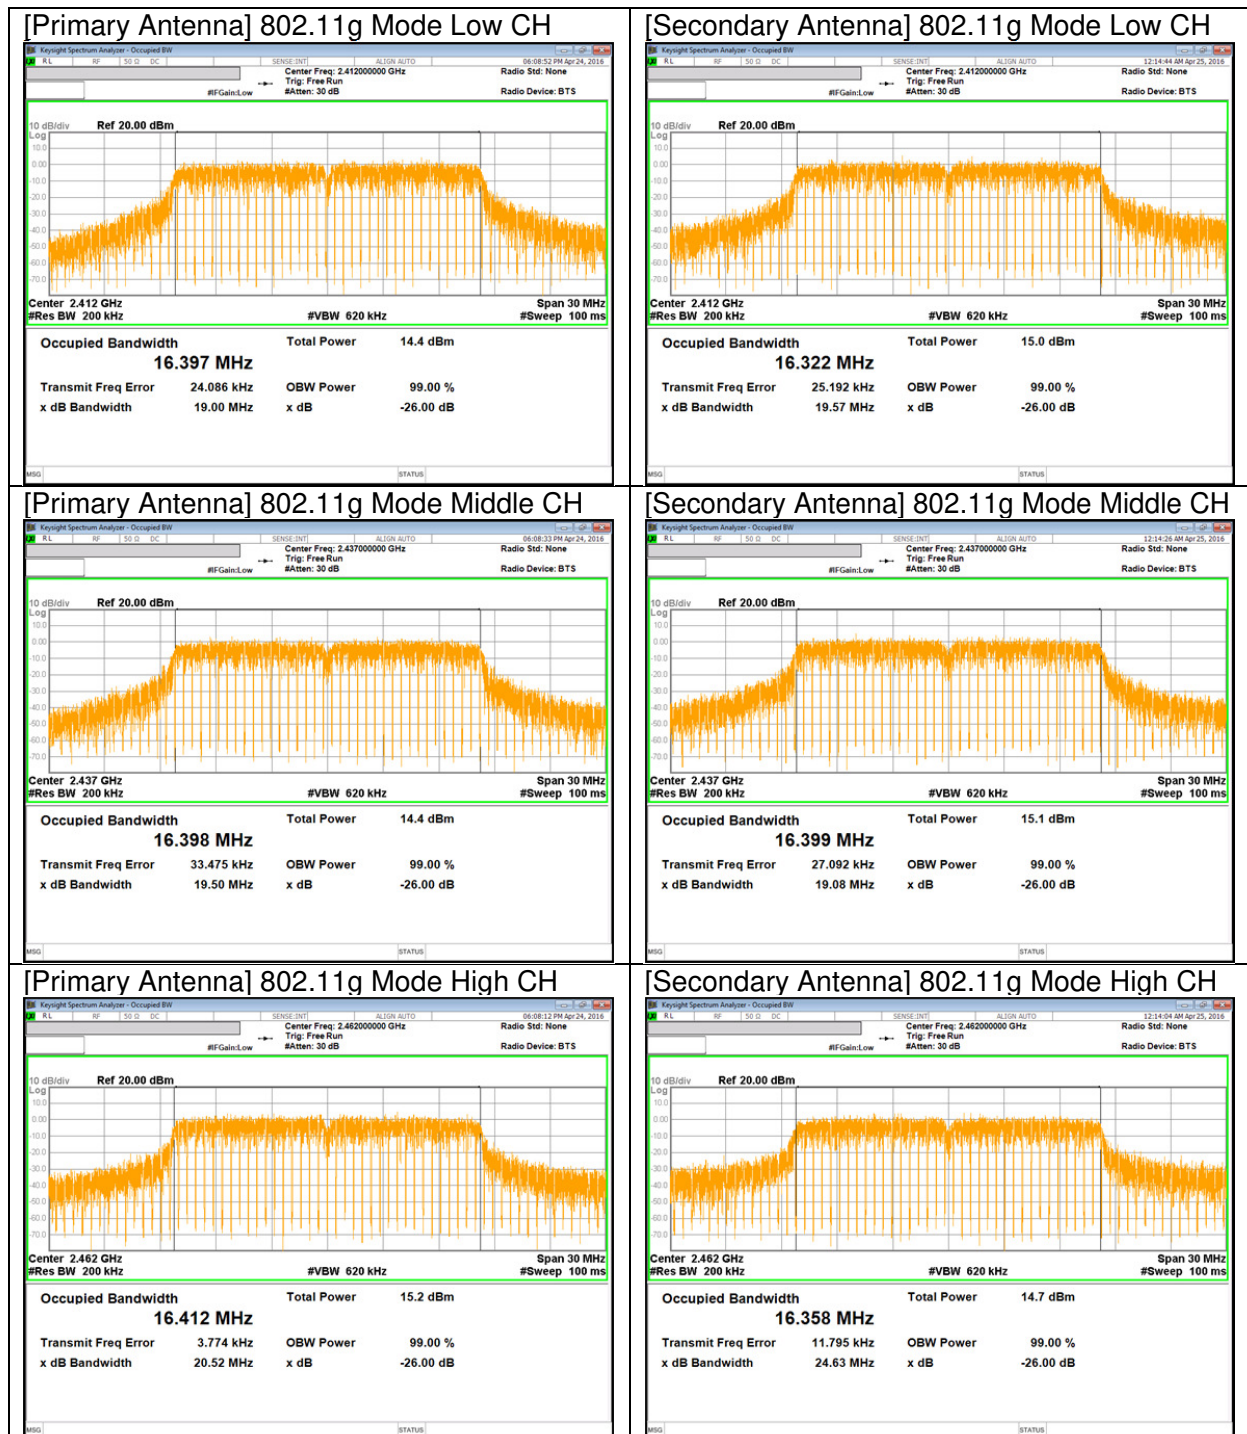

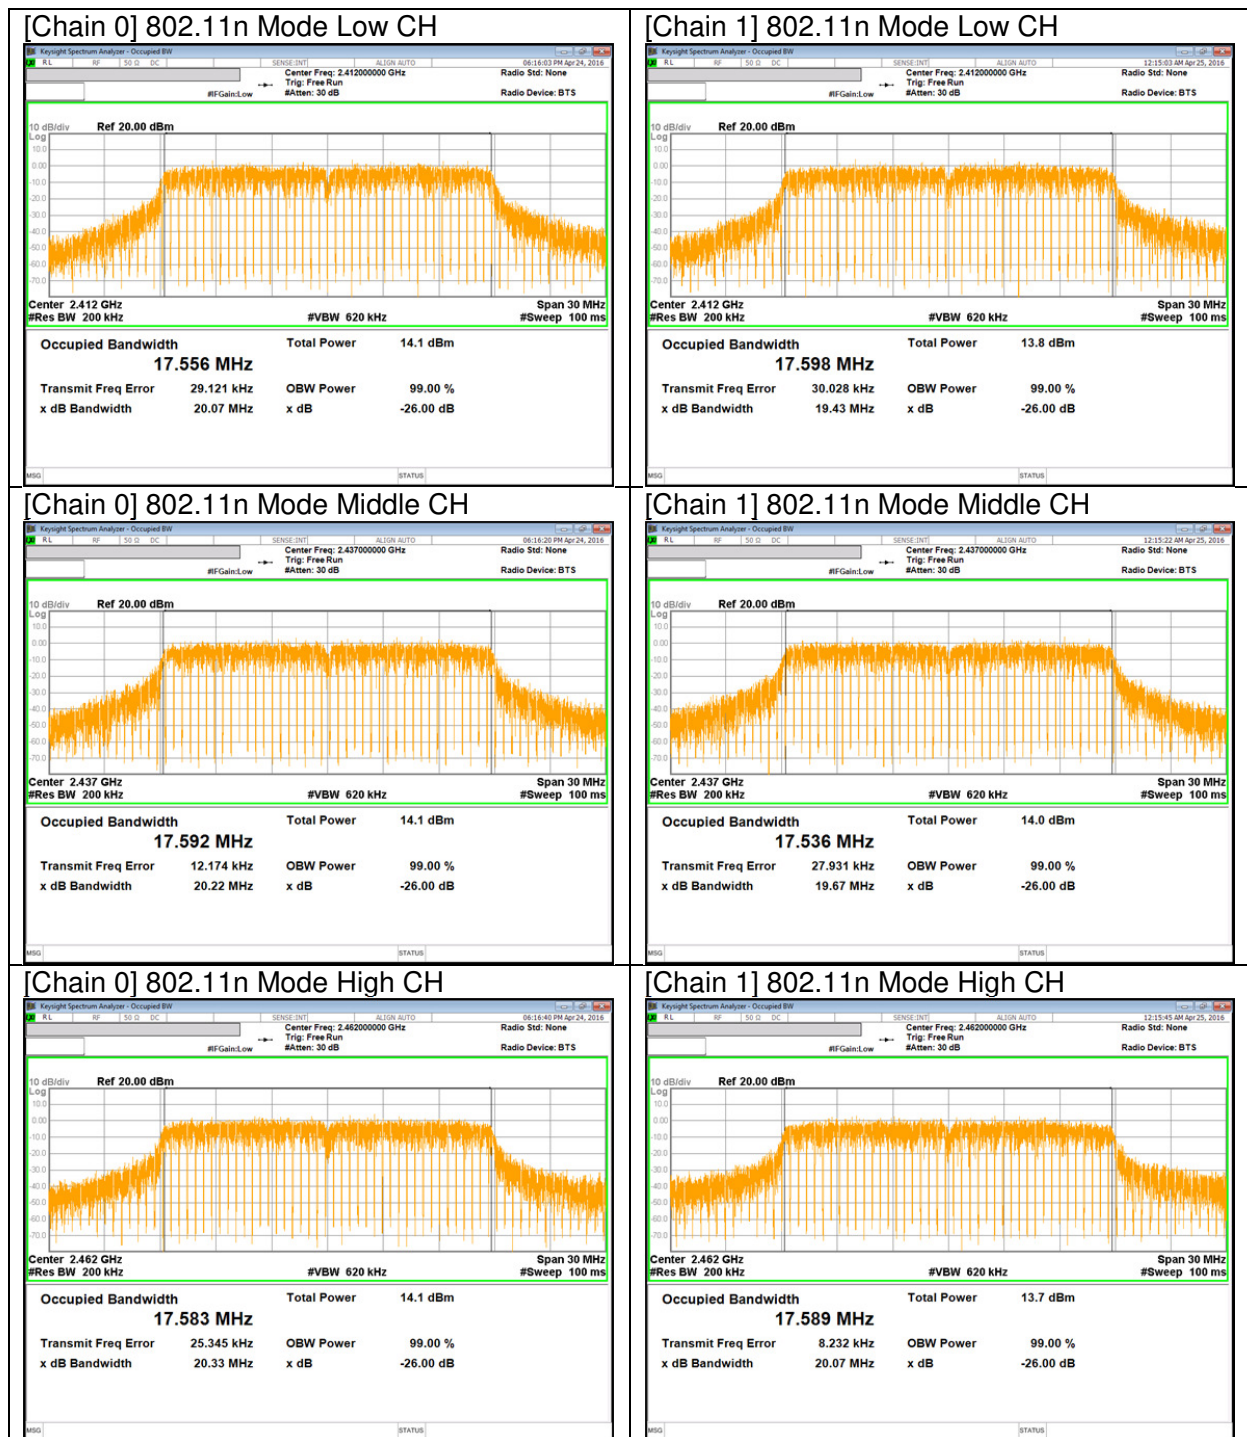

10.3. OUTPUT POWER

LIMITS

FCC §15.247

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 10.1 dB (including 10 dB pad and 0.1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Duty cycle correction factor is already added to the average output power results for duty cycle factor < 98%. (802.11g, 802.11n mode)

DIRECTIONAL ANTENNA GAIN

For Power: The TX chains are uncorrelated and the antenna gain is the same for each chain. The directional gain is equal to the antenna gain.

2.4GHz

Chain 0 Antenna Gain [dBi]	Chain 1 Antenna Gain [dBi]	Uncorrelated Chains Directional Gain [dBi]
-3.35	-3.87	-3.60

For PSD: The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

2.4GHz

Chain 0 Antenna Gain [dBi]	Chain 1 Antenna Gain [dBi]	Correlated Chains Directional Gain [dBi]
-3.35	-3.87	-0.60

- IEEE 802.11b Mode is not supported MIMO operation. So can't transmit on two antennas as the same time.

RESULTS

10.3.1. 802.11b MODE IN THE 2.4 GHz BAND

Limits

Channel	Frequency [MHz]	Directional Gain Primary [dBi]	Directional Gain Secondary [dBi]	FCC Power Limit [dBm]	IC Power Limit [dBm]	IC EIRP Limit [dBm]	Max Power [dBm]
Low	2412	-3.35	-3.87	30.00	30.00	36.00	30.00
Mid	2437	-3.35	-3.87	30.00	30.00	36.00	30.00
High	2462	-3.35	-3.87	30.00	30.00	36.00	30.00

Duty Cycle CF [dB]	0.00	Included in Calculations of Corr'd Power
--------------------	------	--

Results

Channel	Frequency [MHz]	Primary Meas Power [dBm]	Secondary Meas Power [dBm]	Maximum Power [dBm]	Power Limit [dBm]	Margin [dB]
Low	2412	16.06	15.72	16.06	30.00	-14.54
Mid	2437	15.91	15.78	15.91	30.00	-14.51
High	2462	15.76	16.30	16.30	30.00	-14.85
Worst				16.30		

10.3.2. 802.11g MODE IN THE 2.4 GHz BAND

Limits

Channel	Frequency [MHz]	Directional Gain Gain Primary [dBi]	FCC Power Limit [dBm]	IC Power Limit [dBm]	IC EIRP Limit [dBm]	Max Power EIRP Limit [dBm]
Low	2412	-3.60	30.00	30.00	36.00	30.00
Mid	2437	-3.60	30.00	30.00	36.00	30.00
High	2462	-3.60	30.00	30.00	36.00	30.00

Duty Cycle CF [dB]	0.31	Included in Calculations of Corr'd Power
--------------------	------	--

Results

Channel	Frequency [MHz]	Chain 0 Meas Power [dBm]	Chain 1 Meas Power [dBm]	Maximum Power [dBm]	Power Limit [dBm]	Margin [dB]
Low	2412	14.67	15.32	18.02	30.00	-11.85
Mid	2437	14.56	15.40	18.01	30.00	-11.86
High	2462	15.38	14.94	18.18	30.00	-12.04
Worst				18.18		

10.3.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

Limits

Channel	Frequency [MHz]	Directional Gain [dBi]	FCC Power Limit [dBm]	IC Power Limit [dBm]	IC EIRP Limit [dBm]	Max Power [dBm]
Low	2412	-3.60	30.00	30.00	36.00	30.00
Mid	2437	-3.60	30.00	30.00	36.00	30.00
High	2462	-3.60	30.00	30.00	36.00	30.00

Duty Cycle CF [dB]	0.33	Included in Calculations of Corr'd Power
--------------------	------	--

Results

Channel	Frequency [MHz]	Chain 0 Meas Power [dBm]	Chain 1 Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Margin [dB]
Low	2412	14.48	14.14	17.32	30.00	-12.97
Mid	2437	14.36	14.24	17.31	30.00	-12.95
High	2462	14.22	13.80	17.03	30.00	-12.70
Worst				17.32		

10.4. PSD

LIMITS

FCC §15.247

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE

Power Spectral Density was performed utilizing the "Method AVGPS-2" under KDB558074 D01 DTS Meas Guidance v03r05

RESULTS

10.4.1. 802.11b MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	Primary Antenna 1 [dBm]	Secondary Antenna 2 [dBm]	Total PSD [dBm]	Limit [dBm]	Margin [dB]
Low	2412	-14.44	-15.23	-14.44	8.00	-22.44
Mid	2437	-15.07	-15.04	-15.04	8.00	-23.04
High	2462	-15.51	-14.71	-14.71	8.00	-22.71

Duty Cycle CF [dB]	0.00	Included in Calculations of PPSP
--------------------	------	----------------------------------

10.4.2. 802.11g MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	Primary Antenna 1 [dBm]	Secondary Antenna 2 [dBm]	Total PSD [dBm]	Limit [dBm]	Margin [dB]
Low	2412	-19.55	-18.51	-15.68	8.00	-23.68
Mid	2437	-19.81	-19.16	-16.15	8.00	-24.15
High	2462	-19.12	-19.66	-16.06	8.00	-24.06


Duty Cycle CF [dB]	0.31	Included in Calculations of PPSP
--------------------	------	----------------------------------


10.4.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND


Channel	Frequency [MHz]	Chain 0 Meas [dBm]	Chain 1 Meas [dBm]	Total PSD [dBm]	Limit [dBm]	Margin [dB]
Low	2412	-19.48	-19.96	-16.37	8.00	-24.37
Mid	2437	-20.12	-20.19	-16.81	8.00	-24.81
High	2462	-19.91	-20.56	-16.89	8.00	-24.89

Duty Cycle CF [dB]	0.33	Included in Calculations of PPSD
--------------------	------	----------------------------------

10.4.4. PSD PLOTS

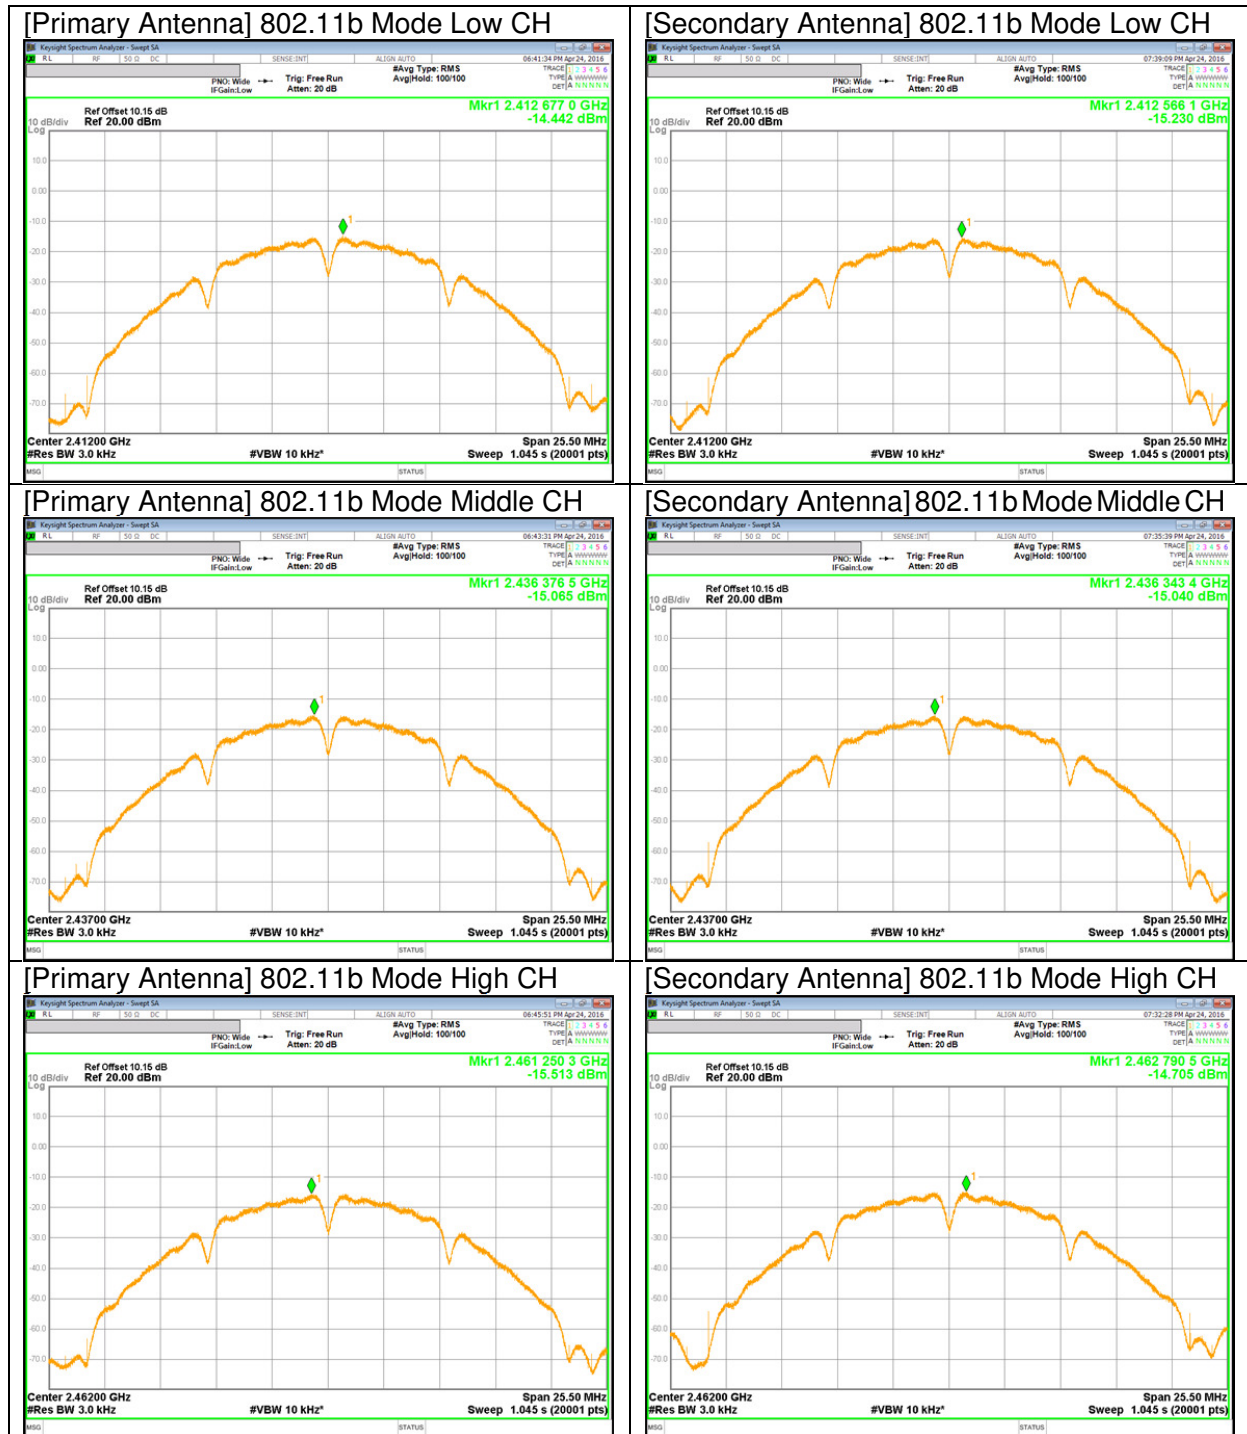

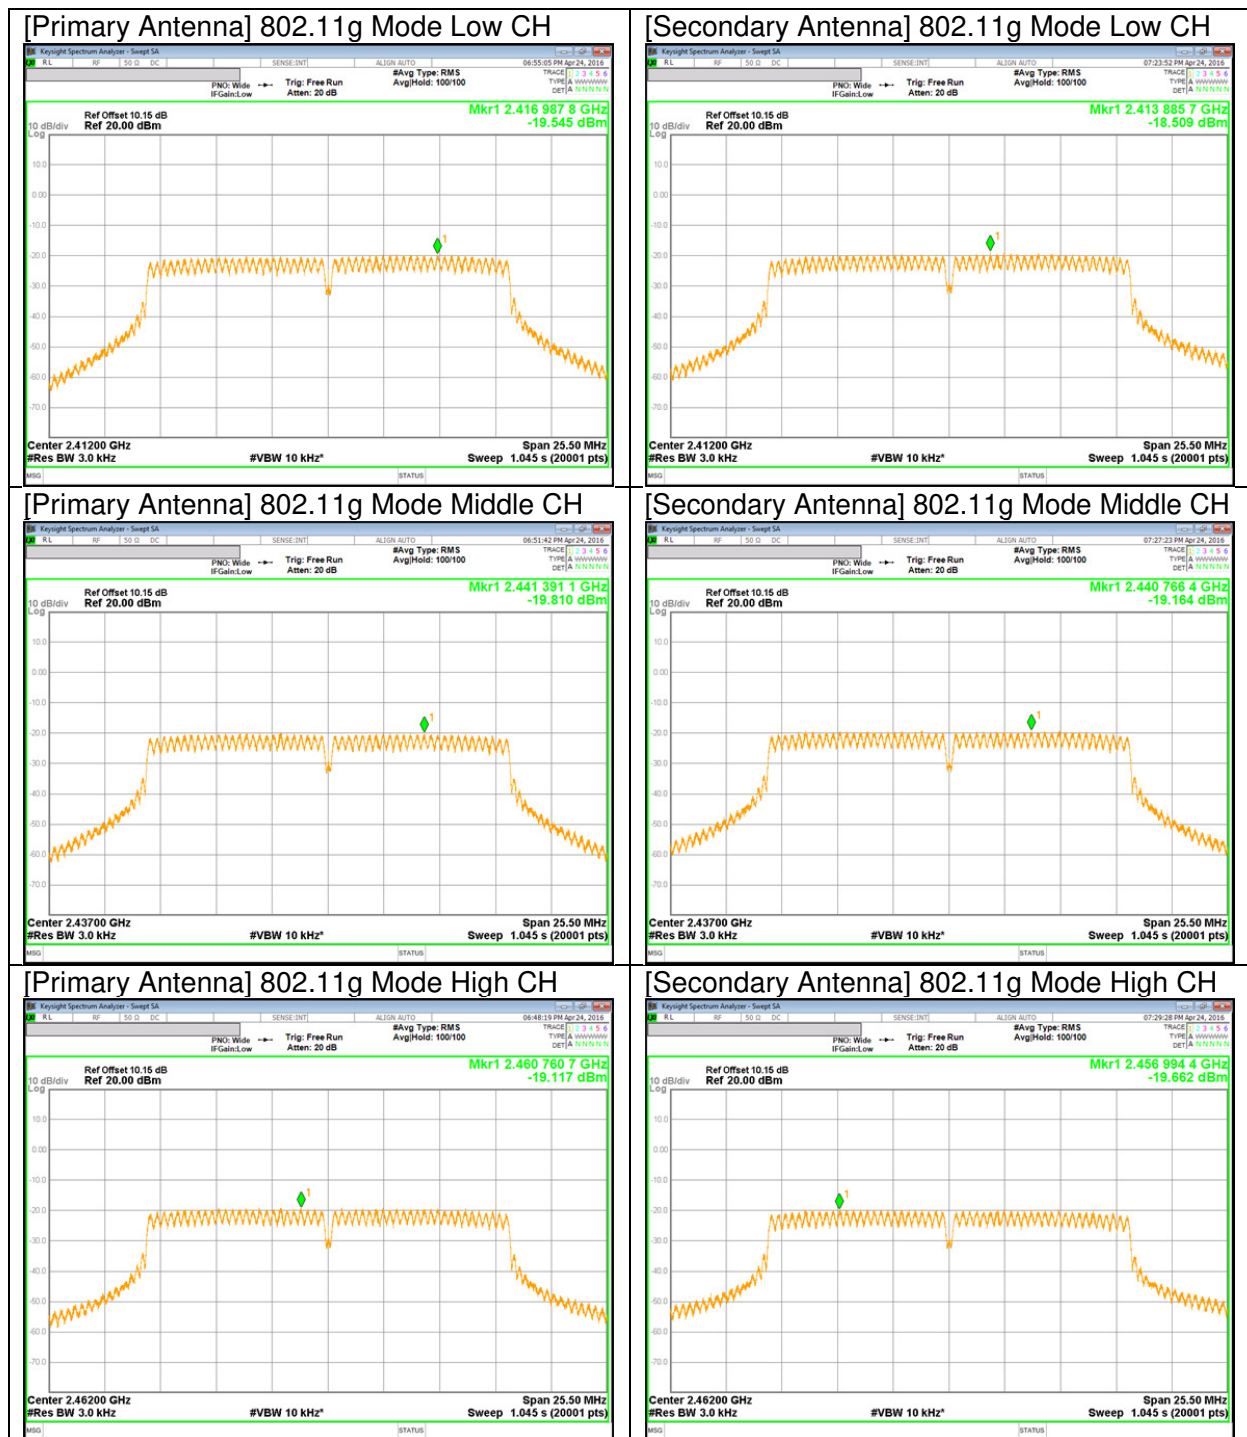

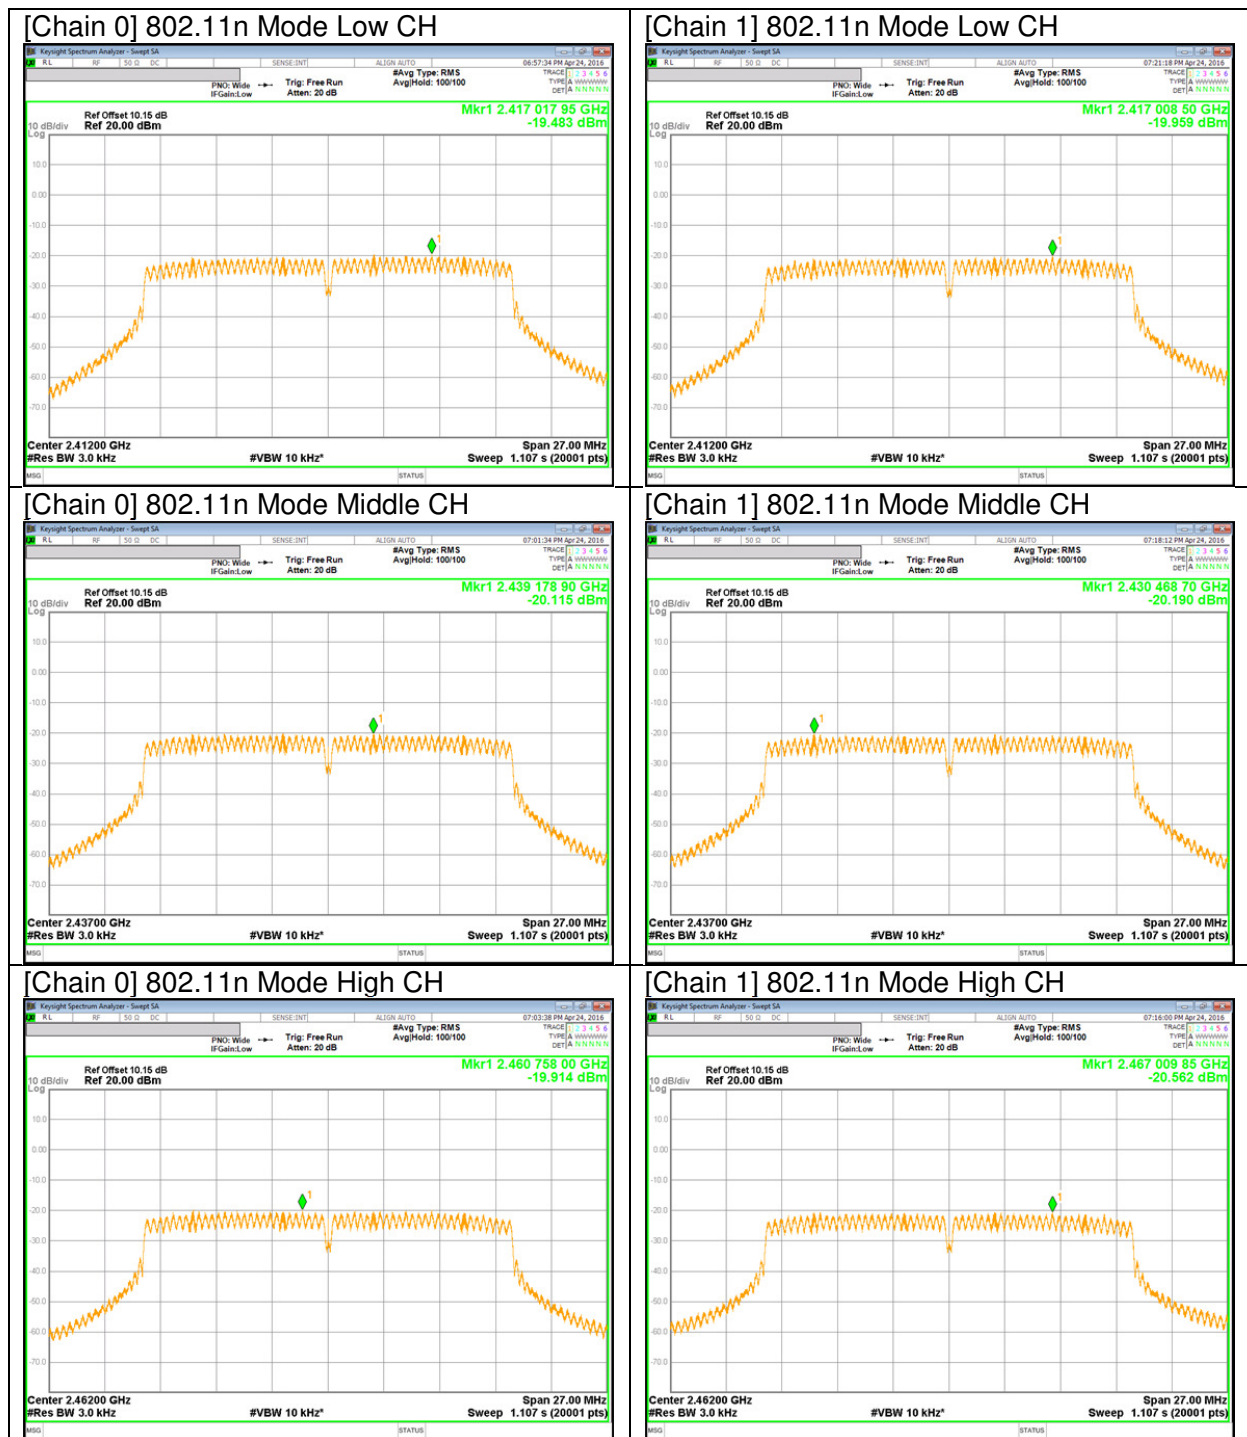

10.5. OUT-OF-BAND EMISSIONS

LIMITS

FCC §15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.


TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer with RBW = 100 kHz, VBW = 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, bandedge (where measurements to the general radiated limits will not be made) and out-of-band emissions.


RESULTS

10.5.1. 802.11b MODE IN THE 2.4 GHz BAND



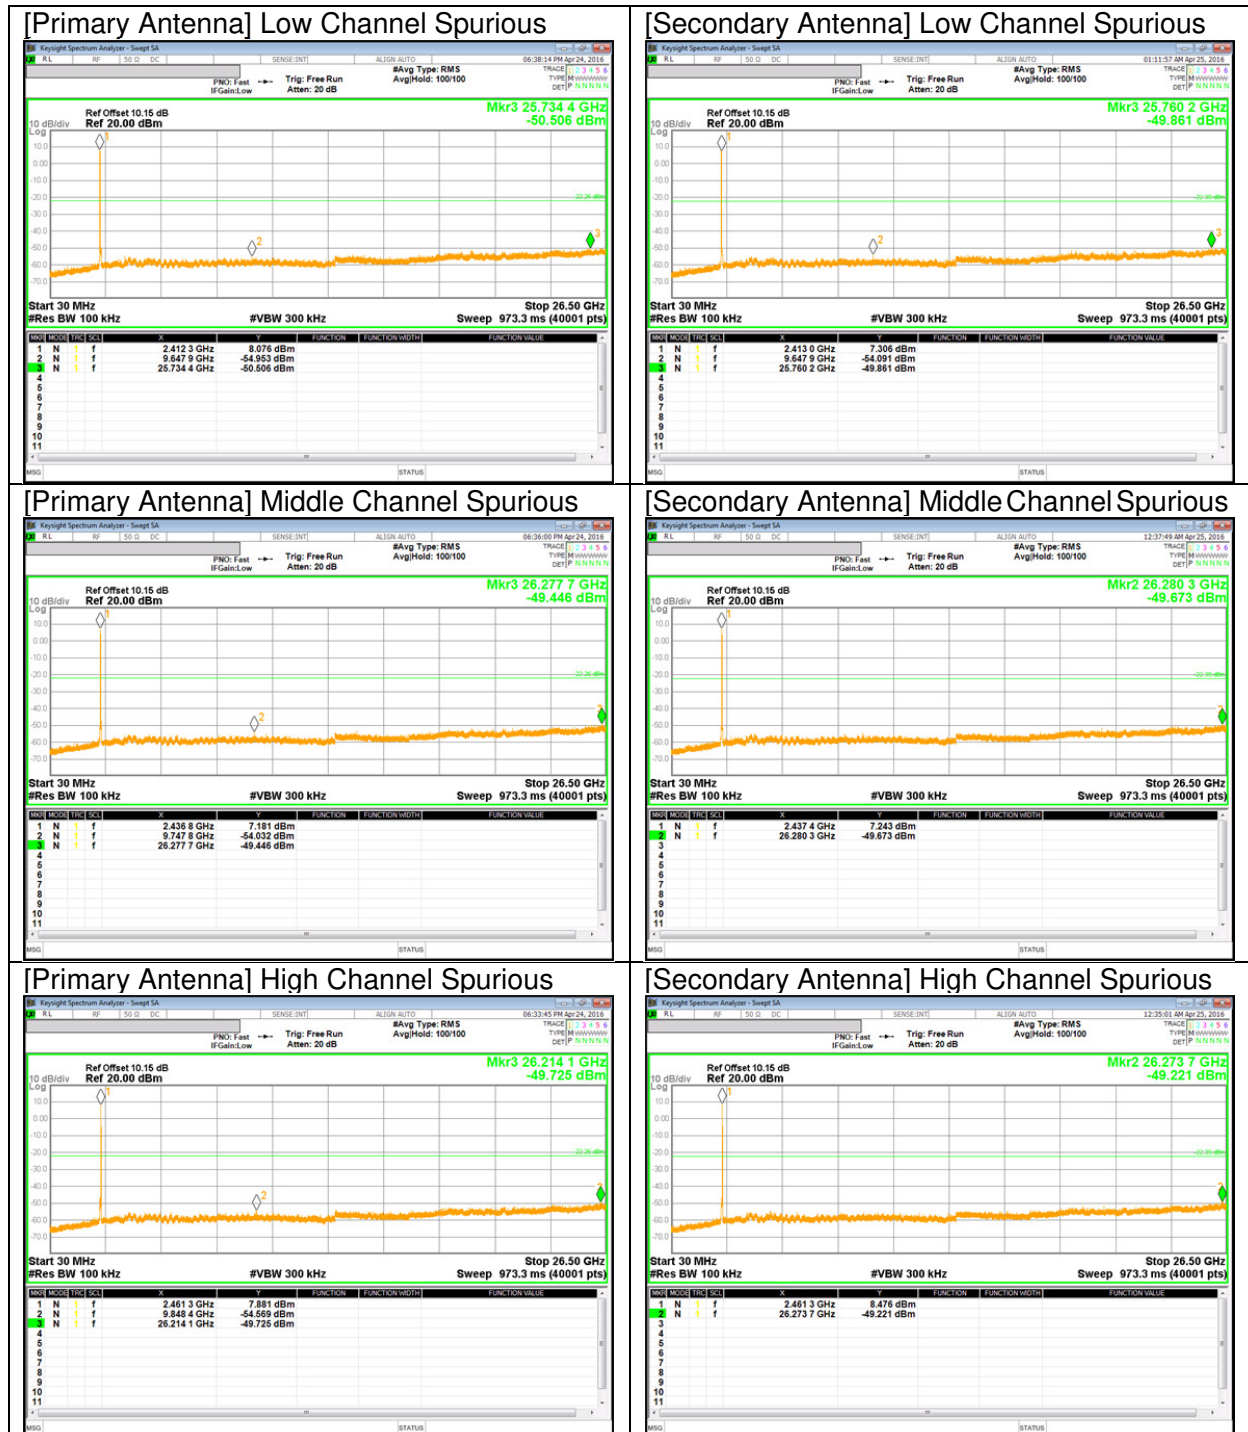

10.5.2. 802.11g MODE IN THE 2.4 GHz BAND

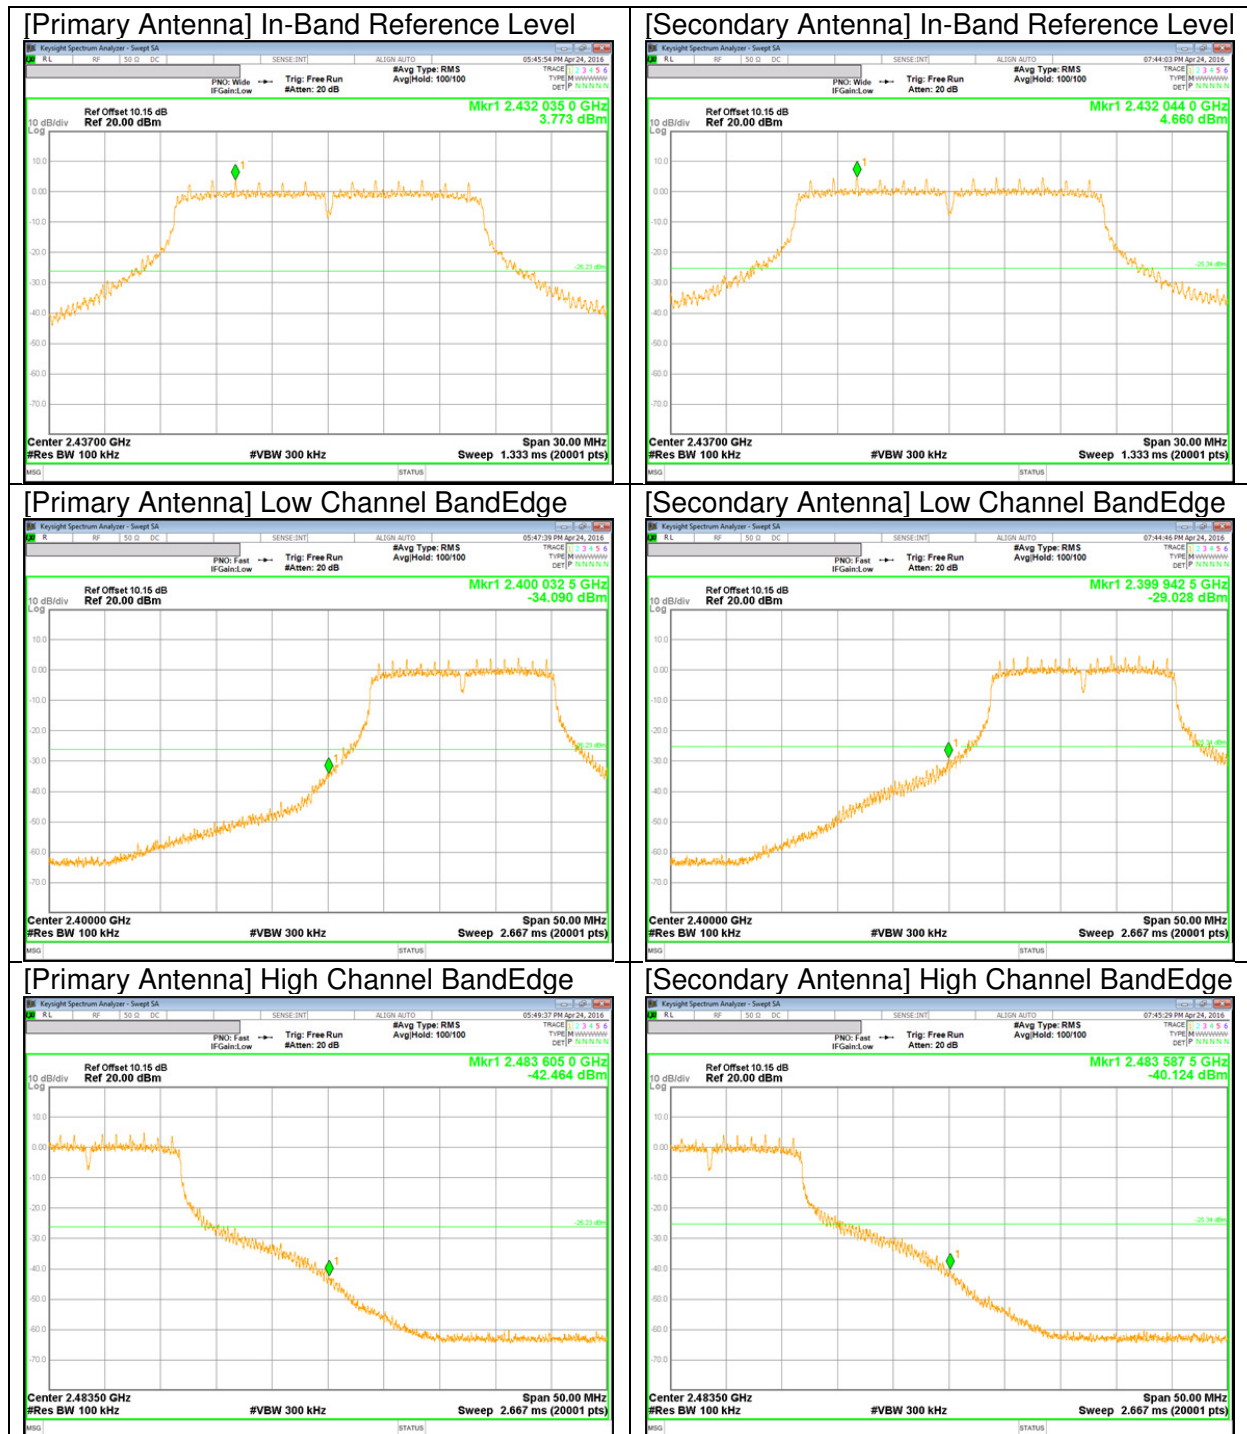

[Primary Antenna] Low Channel Spurious	[Secondary Antenna] Low Channel Spurious
--	--

