



**FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E
FCC CFR47 PART 27 SUBPART M**

WWAN

CERTIFICATION TEST REPORT

FOR

GSM/CDMA/WCDMA/LTE Tablet + BT/BLE, DTS/UNII a/b/g/n/ac and ANT+

MODEL NUMBER : SM-T819C

FCC ID: A3LSMT819C

REPORT NUMBER: 16K23301-E6V3

ISSUE DATE: MAY 12, 2016

Prepared for
**SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA**

Prepared by
**UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433**



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	05/05/16	Initial issue	Junwhan Lee
V2	05/11/16	Revised section 10.4, 11	Junwhan Lee
V3	05/12/16	Revised section 11	Junwhan Lee

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT	7
5.2. MAXIMUM OUTPUT POWER (GSM)	7
5.3. MAXIMUM OUTPUT POWER (WCDMA)	7
5.4. MAXIMUM OUTPUT POWER (CDMA)	8
5.5. MAXIMUM OUTPUT POWER (LTE)	8
5.6. DESCRIPTION OF AVAILABLE ANTENNAS	9
5.7. DESCRIPTION OF TEST SETUP	10
6. TEST AND MEASUREMENT EQUIPMENT	12
7. Summary Table	13
8. RF POWER OUTPUT VERIFICATION	14
8.1. 1xRTT	14
8.1.1. 1xRTT OUTPUT POWER RESULT	15
8.2. 1xEV-DO Release 0	16
8.2.1. 1xEVDO REL.0 OUTPUT POWER RESULT	17
8.3. 1xEV-DO Rev. A	18
8.3.1. 1xEVDO REL.A OUTPUT POWER RESULT	19
8.4. GSM/GPRS/EDGE	20
8.4.1. GSM OUTPUT POWER RESULT	21
8.5. UMTS REL 99	23
8.5.1. WCDMA OUTPUT POWER RESULT	27
8.6. LTE OUTPUT VERIFICATION	29
8.6.1. LTE OUTPUT POWER RESULT	30
9. PEAK TO AVERAGE RATIO	31

9.1.	CONDUCTED PEAK TO AVERAGE RESULT	31
9.2.	CONDUCTED PEAK TO AVERAGE PLOTS.....	32
10.	LIMITS AND CONDUCTED RESULTS.....	35
10.1.	OCCUPIED BANDWIDTH.....	35
10.1.1.	OCCUPIED BANDWIDTH RESULTS	35
10.1.2.	OCCUPIED BANDWIDTH PLOTS	38
10.2.	BAND EDGE EMISSIONS	47
10.2.1.	BAND EDGE PLOTS	53
10.2.1.	EMISSION MASK PLOTS	56
10.3.	OUT OF BAND EMISSIONS	60
10.3.1.	OUT OF BAND EMISSIONS RESULT	60
10.3.2.	OUT OF BAND EMISSIONS PLOTS	63
10.4.	FREQUENCY STABILITY.....	72
10.4.1.	FREQUENCY STABILITY RESULTS.....	73
11.	RADIATED TEST RESULTS.....	79
11.1.	RADIATED POWER (ERP & EIRP).....	79
11.1.1.	ERP/EIRP Results	80
11.1.2.	ERP/EIRP DATA.....	83
11.2.	FIELD STRENGTH OF SPURIOUS RADIATION	92
11.2.1.	SPURIOUS RADIATION PLOTS.....	93
12.	SETUP PHOTOS.....	102

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM/CDMA/ WCDMA/LTE Tablet + BT/BLE, DTS/UNII a/b/g/n/ac and ANT+
MODEL NUMBER: SM-T819C
SERIAL NUMBER: R22H3017RCM (RADIATED); R22H301M3TJ (CONDUCTED)
DATE TESTED: APR 18, 2016 - MAY 10, 2016

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H, 24E, 27	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



CY Choi
Suwon Lab Engineer
UL Korea, Ltd.

Tested By:



Junwhan Lee
Suwon Lab Engineer
UL Korea, Ltd.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-D, FCC CFR 47 Part 22, FCC CFR Part 24 and FCC CFR Part 27.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
☐	Chamber 1
☒	Chamber 2

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

EIRP = PSA reading with EUT worst orientation (dBm) + Path loss (dB) – cable loss(between the SG and substitution antenna) + Substitution Antenna Factor (dBi)

ERP = PSA reading with EUT worst orientation (dBm) + Path loss (dB) – cable loss(between the SG and substitution antenna)

(Path loss = Signal generator output – PSA reading with substitution antenna)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	4.14 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/CDMA/ WCDMA/LTE Tablet + BT/BLE, DTS/UNII a/b/g/n/ac and ANT+.

5.2. MAXIMUM OUTPUT POWER (GSM)

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/24						
Band	Frequency Range	Modulation	Conducted		Radiated	
	[MHz]	Peak	Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
GSM850	824~849	GMSK	33.20	2089.30		
		GPRS	33.20	2089.30	25.6	363.08
		EGPRS	26.48	444.63	22.79	190.11
GSM1900	1850~1910	GMSK	29.59	909.91		
		GPRS	29.64	920.45	30.44	1106.62
		EGPRS	25.39	345.94	26.70	467.74

5.3. MAXIMUM OUTPUT POWER (WCDMA)

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/24						
Band	Frequency Range	Modulation	Conducted		Radiated	
	[MHz]	Peak	Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
Band 5	824~849	REL99	23.15	206.54	18.77	75.34
		HSDPA	22.14	163.68	18.84	76.56
		HSUPA	22.23	167.11		
Band 2	1850~1910	REL99	23.26	211.84	23.38	217.77
		HSDPA	22.30	169.82	21.99	158.12
		HSUPA	22.32	170.61		

5.4. MAXIMUM OUTPUT POWER (CDMA)

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/24						
Band	Frequency Range	Modulation	Conducted		Radiated	
	[MHz]	Peak	Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
BC0	824~849	1xRTT	24.4	275.42	21.2	131.83
		EVDO REL. 0	24.2	263.03	20.48	111.69
		EVDO REV. A	24.3	269.15		

5.5. MAXIMUM OUTPUT POWER (LTE)

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

LTE Band 41

FCC Part 27							
Band	Frequency Range [MHz]	BandWidth [MHz]	Modulation Peak	Conducted		Radiated	
				Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
Band 41	2555~2655	20MHz	QPSK	24.10	257.04	22.46	176.20
			16QAM	22.69	185.78	21.51	141.58
		15MHz	QPSK	23.96	248.89	22.85	192.75
			16QAM	23.24	210.86	22.02	159.22
		10MHz	QPSK	23.74	236.59	23.26	211.84
			16QAM	23.30	213.80	22.27	168.66
		5MHz	QPSK	24.12	258.23	22.70	186.21
			16QAM	22.87	193.64	21.57	143.55

5.6. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a FPCB antenna for the [List the bands supported] with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
CDMA BC0/GSM850 / WCDMA Band 5 824 ~ 849 MHz	-3.77
GSM1900 / WCDMA Band 2 1850 ~ 1910 MHz	-1.04
LTE Band 41 2557.5 ~ 2652.5 MHz	-1.86

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA12CBC	DW2H229DS/B-E	N/A
Data Cable	SAMSUNG	EP-DG925UWE	N/A	N/A
Earphone	SAMSUNG	EO-EG900BW	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	0.8m	N/A
1	Audio	1	Mini-Jack	Unshielded	1.0m	N/A


TEST SETUP

The EUT is continuously communicated to the call box during the tests.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

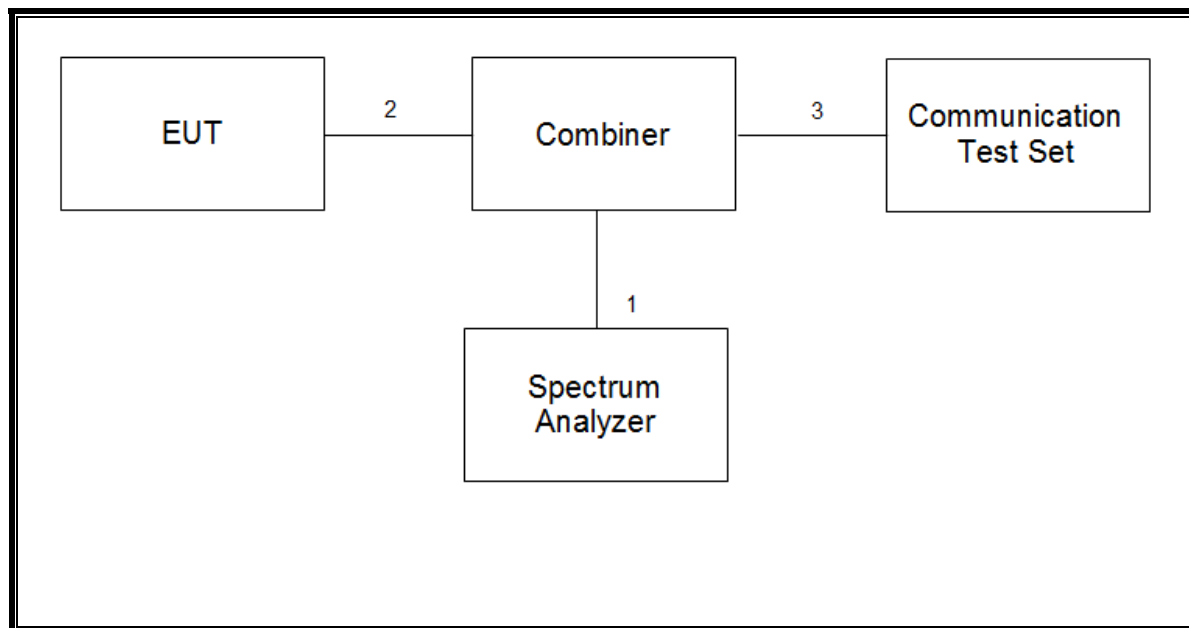

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

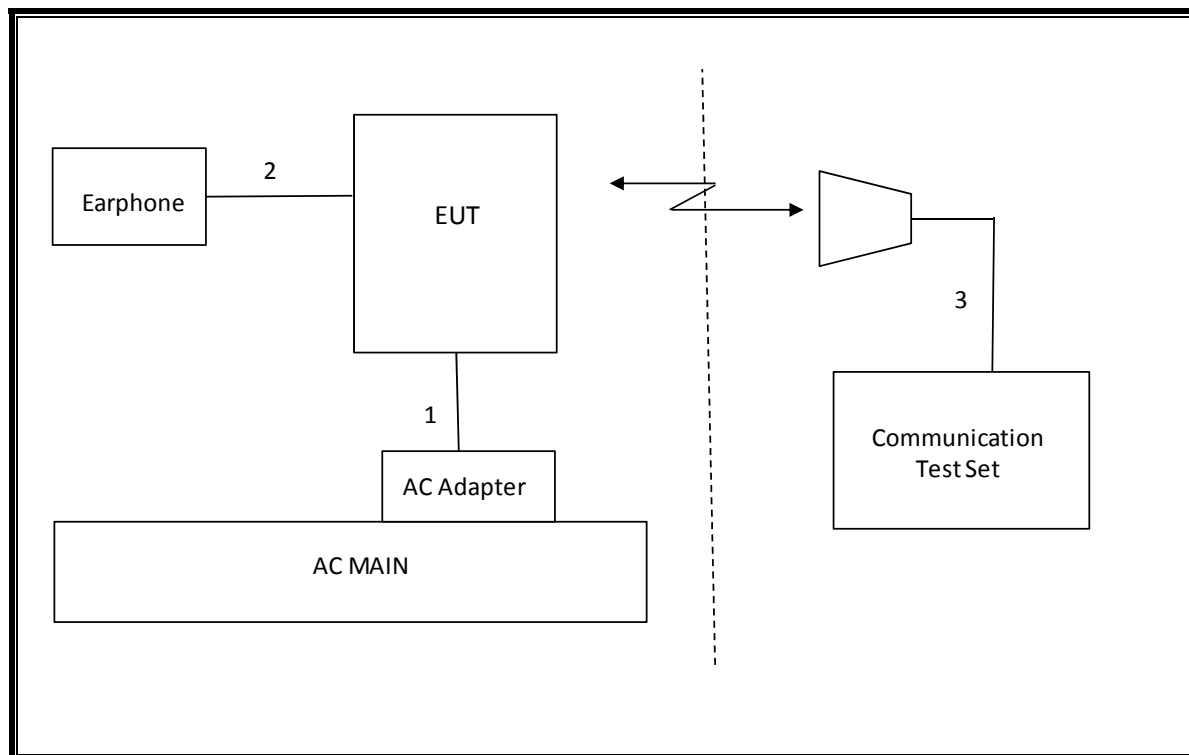

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Tuned Dipole 400~1000 MHz	ETS	3121D DB4	00164753	07-28-16
Antenna, Horn, 40 GHz	ETS	3116C	00166155	09-23-16
Antenna, Horn, 40 GHz	ETS	3116C-PA	00168841	08-24-17
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	11-17-16
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	04-25-17
Antenna, Horn, 18 GHz	ETS	3115	00167211	09-20-16
Antenna, Horn, 18 GHz	ETS	3115	00161451	05-17-17
Antenna, Horn, 18 GHz	ETS	3117	00168724	06-17-17
Antenna, Horn, 18 GHz	ETS	3117	00168717	06-17-17
Combiner	WEINSCHTEL	1575	2151	08-20-16
Communications Test Set	R&S	CMW500	150312	08-18-16
Communications Test Set	R&S	CMW500	115331	08-18-16
Communications Test Set	R&S	CMW500	102271	08-18-16
DC Power Supply	Agilent / HP	E3640A	MY54226395	08-18-16
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-18-16
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-18-16
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	08-18-16
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-18-16
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-19-16
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-19-16
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	08-18-16
Average Power Sensor	R&S	NRZ-Z91	102681	08-18-16
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-18-16
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-19-16
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-19-16
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-19-16
Attenuator / Switch driver	HP	11713A	3748A04272	N/A
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	009	08-18-16
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	015	08-18-16
High Pass Filter 5GHz	Micro-Tronics	HPS17542	009	08-18-16
High Pass Filter 6GHz	Micro-Tronics	HPM17543	010	08-18-16
High Pass Filter 5GHz	Micro-Tronics	HPS17542	016	08-18-16
High Pass Filter 6GHz	Micro-Tronics	HPM17543	015	08-18-16
LISN	R&S	ENV-216	101836	08-19-16
LISN	R&S	ENV-216	101837	08-19-16

7. Summary Table

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result	Note
2.1049	Occupied Band width (99%)	N/A	Conducted	Pass	17.878 MHz
22.917(a) 24.238(a)	Band Edge / Conducted Spurious Emission	-13dBm		Pass	-13.556 dBm
27.53(m)	Conducted Spurious Emission	-25dBm		Pass	-30.73 dBm
27.53(m)	Emission Mask	-10dBm		Pass	-15.22 dBm
2.1046	Conducted output power	N/A		Pass	33.2 dBm
22.355 24.235 27.54	Frequency Stability	2.5PPM		Pass	0.022PPM
22.913(a)(2)	Effective Radiated Power	38 dBm	Radiated	Pass	25.6 dBm
24.232(c) 27.50(h)(2)	Equivalent Isotropic Radiated Power	33dBm		Pass	30.44 dBm
22.917(a) 24.238(a)	Radiated Spurious Emission	-13dBm		Pass	-28.1 dBm
27.53(m)	Radiated Spurious Emission	-25dBm		Pass	-48.6 dBm

FCC Rule Part	Frequency Range [MHz]	Output Power [W]	Frequency Tolerance	Emission Designator	Emission Bandwidth [MHz]	Communication Type
GSM						
22H	824.2 - 848.8	0.363	2.5 ppm	248KGXW		GSM850
22H	824.2 - 848.8	0.190	2.5 ppm	252KG7W		EDGE850
24E	1850.2 - 1909.8	1.107	2.5 ppm	250KGXW		GSM1900
24E	1850.2 - 1909.8	0.468	2.5 ppm	245KG7W		EDGE1900
CDMA						
22H	824.7 - 848.31	0.132	2.5 ppm	1M28F9W		BC0
WCDMA						
22H	826.4 - 846.6	0.077	2.5 ppm	4M16F9W		WCDMA
24E	1852.4 - 1907.6	0.218	2.5 ppm	4M13F9W		WCDMA
LTE Band 41						
27M	2565.0 - 2645.0	0.176	2.5 ppm	17M8G7W	20	QPSK
27M	2565.0 - 2645.0	0.142	2.5 ppm	17M9D7W	20	16QAM
27M	2560.0 - 2650.0	0.212	2.5 ppm	8M95G7W	10	QPSK
27M	2560.0 - 2650.0	0.169	2.5 ppm	8M97D7W	10	16QAM

8.1.1. 1xRTT OUTPUT POWER RESULT

Band	Mode	Ch	Freq. (MHz)	Avg Pwr (dBm)
BC0	RC1, SO55 (Loopback)	1013	824.70	24.2
		384	836.52	24.4
		777	848.31	24.2
	RC3, SO55 (Loopback)	1013	824.70	24.2
		384	836.52	24.4
		777	848.31	24.2
	RC3, SO32 (+F-SCH)	1013	824.70	24.2
		384	836.52	24.4
		777	848.31	24.2

8.2. 1xEV-DO Release 0

TEST PROCEDURE

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev. License</u>
1xEV-DO Terminal Test	A.09.13

EVDO Release 0 - RTAP

- Call Setup > Shift & Preset
- Call Control:
 - Access Network Info > Cell Parameters > Sector ID > 00000000 > Subnet Mask > 0
 - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Call Params:
 - Cell Power > -105.5 dBm/1.23 MHz
 - Cell Band > (Select US Cellular or US PCS)
 - Channel > (Enter channel number)
 - Application Config > Enhanced Test Application Protocol > RTAP
 - RTAP Rate > 153.6 kbps
 - Rvs Power Ctrl > Active bits
 - Protocol Rel > 0 (1xEV-DO)
- Press "Start Data Connection" when "Session Open" appear in "Active Cell"
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

EVDO Release 0 - FTAP

- Call Setup > Shift & Preset
- Call Control:
 - Access Network Info > Cell Parameters > Sector ID > 00000000 > Subnet Mask > 0
 - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Call Params:
 - Cell Power > -105.5 dBm/1.23 MHz
 - Cell Band > (Select US Cellular or US PCS)
 - Channel > (Enter channel number)
 - Application Config > Enhanced Test Application Protocol > FTAP (default)
 - FTAP Rate > 307.2 kbps (2 Slot, QPSK)
 - Rvs Power Ctrl > Active bits
 - Protocol Rel > 0 (1xEV-DO)
- Press "Start Data Connection" when "Session Open" appear in "Active Cell"
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

8.2.1. 1xEVDO REL.0 OUTPUT POWER RESULT

Band	FTAP Rate	Channel	f (MHz)	Avg Pwr (dBm)
BC0	307.2 kbps (2 slot, QPSK)	1013	824.70	24.2
		384	836.52	24.2
		777	848.31	24.1

8.3. 1xEV-DO Rev. A

TEST PROCEDURE

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev. License</u>
1xEV-DO Terminal Test	A.09.13

EVDO Release A – RETAP

- Call Setup > Shift & Preset
- Cell Power > -60 dBm/1.23 MHz
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > RETAP
- R-Data Pkt Size > 4096
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 2
- > PL Subtype 2 Access Channel MAC Subtype > Default (Subtype 0)
- Access Network Info > Cell Parameters > Sector ID > 00000000 > Subnet Mask > 0
- Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- > ACK R-Data After > Subpacket 0 (All ACK)
- Rvs Power Ctrl > All Up bits (to get the maximum power)

EVDO Release A - FETAP

- Call Setup > Shift & Preset
- Cell Power > -60 dBm/1.23 MHz
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > FETAP
- F-Traffic Format > 4 (1024, 2, 128) Canonical (307.2k, QPSK)
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 2
- > PL Subtype 2 Access Channel MAC Subtype > Default (Subtype 0)
- Access Network Info > Cell Parameters > Sector ID > 00000000 > Subnet Mask > 0
- Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- > ACK R-Data After > Subpacket 0 (All ACK)
- Rvs Power Ctrl > All Up bits (to get the maximum power)

8.3.1. 1xEVDO REL.A OUTPUT POWER RESULT

1xEVDO REV A OUTPUT RESULT

Band	FTAP Rate	Channel	f (MHz)	Avg Pwr (dBm)
BC0	307.2 kbps (2 slot, QPSK)	1013	824.70	24.3
		384	836.52	24.3
		777	848.31	24.2

8.4. GSM/GPRS/EDGE

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900
Press Connection control to choose the different menus
Press RESET > choose all to reset all settings
Connection Press Signal Off to turn off the signal and change settings
Network Support > GSM+GPRS or GSM+EGPRS
Main Service > Packet Data
Service selection > Test Mode A – Auto Slot Config. off
MS Signal Press Slot Config bottom on the right twice to select and change the number of time slots and power setting
 > Slot configuration > Uplink/Gamma
 > 33 dBm for GPRS 850/900
 > 30 dBm for GPRS1800/1900
BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel
Frequency Offset > + 0 Hz
Mode > BCCH and TCH
BCCH Level > -85 dBm (May need to adjust if link is not stable)
BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]
Channel Type > Off
P0> 4 dB
Slot Config > Unchanged (if already set under MS Signal)
TCH > choose desired test channel
Hopping > Off
Main Timeslot > 3 (Default)
Network Coding Scheme > CS4 (GPRS) and MCS5 ~ MCS9 (EGPRS)
Bit Stream > 2E9-1PSR Bit Pattern
AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input
Connection Press Signal On to turn on the signal and change settings

8.4.1. GSM OUTPUT POWER RESULT

GSM850 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. [MHz]	Max. Power	
						Burst Pwr [dBm]	Frame Pwr [dBm]
850	GSM (Voice)	CS1	1	128	824.2	33.20	24.17
				190	836.6	33.00	23.97
				251	848.8	33.20	24.17
	GPRS (GMSK)	CS1	1	128	824.2	33.17	24.14
				190	836.6	33.00	23.97
				251	848.8	33.20	24.17
			2	128	824.2	30.57	24.55
				190	836.6	30.63	24.61
				251	848.8	30.79	24.77
			3	128	824.2	28.44	24.18
				190	836.6	28.38	24.12
				251	848.8	28.71	24.45
			4	128	824.2	26.24	23.22
				190	836.6	26.27	23.26
				251	848.8	26.16	23.15
	EGPRS (8PSK)	MCS5	1	128	824.2	26.48	17.45
				190	836.6	26.40	17.37
				251	848.8	26.34	17.31
			2	128	824.2	25.75	19.73
				190	836.6	25.70	19.68
				251	848.8	25.61	19.59
			3	128	824.2	24.61	20.35
				190	836.6	24.59	20.33
				251	848.8	24.50	20.24
			4	128	824.2	24.05	21.04
				190	836.6	23.95	20.94
				251	848.8	23.83	20.82

GSM1900 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. [MHz]	Max. Power	
						Burst Pw r [dBm]	Frame Pw r [dBm]
1900	GSM (Voice)	CS1	1	512	1850.2	29.59	20.56
				661	1880.0	29.30	20.27
				810	1909.8	29.05	20.01
	GPRS (GMSK)	CS1	1	512	1850.2	29.64	20.61
				661	1880.0	29.36	20.33
				810	1909.8	29.17	20.14
			2	512	1850.2	27.19	21.16
				661	1880.0	27.13	21.11
				810	1909.8	27.01	20.99
			3	512	1850.2	24.10	19.84
				661	1880.0	24.02	19.76
				810	1909.8	24.12	19.86
			4	512	1850.2	23.11	20.10
				661	1880.0	23.00	19.99
				810	1909.8	23.49	20.48
	EGPRS (8PSK)	MCS5	1	512	1850.2	25.39	16.36
				661	1880.0	25.22	16.19
				810	1909.8	25.21	16.18
			2	512	1850.2	24.36	18.33
				661	1880.0	24.20	18.17
				810	1909.8	24.23	18.21
			3	512	1850.2	23.83	19.57
				661	1880.0	23.67	19.41
				810	1909.8	23.75	19.49
			4	512	1850.2	23.17	20.16
				661	1880.0	23.12	20.11
				810	1909.8	23.21	20.20

8.5. UMTS REL 99

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 7 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR (dB)	0	0	0.5	0.5
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	15/1
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15	56/75	47/15
HSDPA Specific Settings	CM (dB)	1	3	2	3	1
	MPR (dB)	0	2	1	2	0
	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
HSUPA Specific Settings	$A_{hs} = \beta_{hs}/\beta_c$	30/15				
	E-DPDCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
	Reference E-TFCI PO	27	27	27	27	27
	Maximum Channelisation Codes	2xSF2				SF4

DC-HSDPA Setup Procedures used to establish the test signals

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

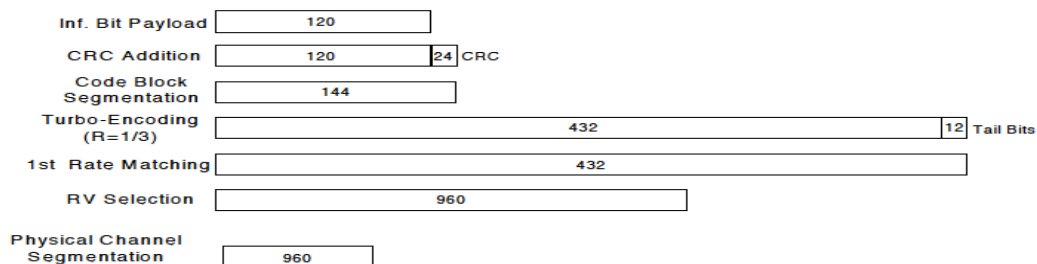


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs} / \beta_c$	30/15			

HSPA+

Since 16QAM is not used for uplink, the uplink Category and release is same as HSUPA, i.e., CAT 6 Rel 6. Therefore, the RF conducted power is not measured.

8.5.1. WCDMA OUTPUT POWER RESULT

WCDMA Band 5 Measured Results

Band	Mode		UL Ch No.	Freq. [MHz]	MPR [dB]	Avg Pwr [dBm]
W-CDMA Band V	Rel 99	RMC, 12.2 kbps	4132	826.4	0	23.10
			4183	836.6	0	23.15
			4233	846.6	0	23.05
	HSDPA	Subtest 1	4132	826.4	0	22.12
			4183	836.6	0	22.14
			4233	846.6	0	22.06
		Subtest 2	4132	826.4	0	21.76
			4183	836.6	0	21.75
			4233	846.6	0	21.68
		Subtest 3	4132	826.4	0.5	21.60
			4183	836.6	0.5	21.58
			4233	846.6	0.5	21.53
		Subtest 4	4132	826.4	0.5	21.51
			4183	836.6	0.5	21.58
			4233	846.6	0.5	21.51
	HSUPA	Subtest 1	4132	826.4	0	22.17
			4183	836.6	0	22.23
			4233	846.6	0	21.72
		Subtest 2	4132	826.4	2	20.14
			4183	836.6	2	20.16
			4233	846.6	2	20.12
		Subtest 3	4132	826.4	1	21.14
			4183	836.6	1	21.19
			4233	846.6	1	21.09
		Subtest 4	4132	826.4	2	20.14
			4183	836.6	2	20.16
			4233	846.6	2	20.13
		Subtest 5	4132	826.4	0	22.17
			4183	836.6	0	22.20
			4233	846.6	0	22.15

WCDMA Band 2 Measured Results

Band	Mode		UL Ch No.	Freq. [MHz]	MPR [dB]	Avg Pwr [dBm]
W-CDMA Band II	Rel 99	RMC, 12.2 kbps	9262	1852.4	0	23.26
			9400	1880.0	0	23.17
			9538	1907.6	0	23.15
	HSDPA	Subtest 1	9262	1852.4	0	22.30
			9400	1880.0	0	22.17
			9538	1907.6	0	22.17
		Subtest 2	9262	1852.4	0	21.83
			9400	1880.0	0	21.67
			9538	1907.6	0	21.66
		Subtest 3	9262	1852.4	0.5	21.75
			9400	1880.0	0.5	21.61
			9538	1907.6	0.5	21.58
		Subtest 4	9262	1852.4	0.5	21.80
			9400	1880.0	0.5	21.61
			9538	1907.6	0.5	21.59
	HSUPA	Subtest 1	9262	1852.4	0	22.31
			9400	1880.0	0	22.25
			9538	1907.6	0	22.02
		Subtest 2	9262	1852.4	2	20.28
			9400	1880.0	2	20.16
			9538	1907.6	2	20.09
		Subtest 3	9262	1852.4	1	21.25
			9400	1880.0	1	21.18
			9538	1907.6	1	21.18
		Subtest 4	9262	1852.4	2	20.31
			9400	1880.0	2	20.13
			9538	1907.6	2	20.12
		Subtest 5	9262	1852.4	0	22.32
			9400	1880.0	0	22.29
			9538	1907.6	0	22.20

8.6. LTE OUTPUT VERIFICATION

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 6.2.4-2	Table 6.2.4-2
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

8.6.1. LTE OUTPUT POWER RESULT

LTE Band 41 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr [dBm]		
						Max. Power		
						2565 MHz	2605 MHz	2645 MHz
LTE Band 41	20	QPSK	1	0	0	22.85	23.62	23.60
			1	49	0	23.35	24.10	23.80
			1	99	0	22.94	23.59	23.52
			50	0	1	21.89	21.91	21.90
			50	24	1	21.73	21.94	21.92
			50	50	1	21.68	21.84	21.76
		16QAM	100	0	1	21.76	21.97	21.88
			1	0	1	21.90	21.79	22.33
			1	49	1	22.29	22.69	22.54
			1	99	1	21.77	21.92	21.91
			50	0	2	20.86	20.85	20.79
			50	24	2	20.76	21.01	20.92
			50	50	2	20.78	20.90	20.85
			100	0	2	20.88	20.85	20.86
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr [dBm]		
						Max. Power		
						2562.5 MHz	2605 MHz	2647.5 MHz
LTE Band 41	15	QPSK	1	0	0	23.05	23.74	23.64
			1	37	0	23.22	23.96	23.77
			1	74	0	22.89	23.53	23.50
			36	0	1	21.83	22.00	21.97
			36	20	1	21.79	21.92	21.86
			36	39	1	21.64	21.87	21.83
		16QAM	75	0	1	21.66	21.91	21.89
			1	0	1	22.03	22.33	22.89
			1	37	1	22.09	22.49	23.24
			1	74	1	21.75	22.15	22.59
			36	0	2	20.86	21.00	20.76
			36	20	2	20.82	20.95	20.80
			36	39	2	20.67	20.85	20.65
			75	0	2	20.77	20.95	20.96
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr [dBm]		
						Max. Power		
						2560 MHz	2605 MHz	2650 MHz
LTE Band 41	10	QPSK	1	0	0	23.16	23.74	23.68
			1	25	0	23.38	23.72	23.73
			1	49	0	23.02	23.71	23.74
			25	0	1	21.88	21.98	21.92
			25	12	1	21.80	21.99	21.90
			25	25	1	21.77	21.96	21.88
		16QAM	50	0	1	21.85	21.88	21.89
			1	0	1	22.03	22.27	23.01
			1	25	1	22.17	22.25	23.30
			1	49	1	21.84	21.80	22.79
			25	0	2	20.79	20.92	21.00
			25	12	2	20.82	20.93	20.98
			25	25	2	20.70	20.82	20.97
			50	0	2	20.81	20.84	20.86
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr [dBm]		
						Max. Power		
						2557.5 MHz	2605 MHz	2652.5 MHz
LTE Band 41	5	QPSK	1	0	0	23.22	23.67	23.16
			1	12	0	23.46	24.12	23.51
			1	24	0	23.19	23.62	23.18
			12	0	1	21.78	21.92	21.45
			12	7	1	21.90	21.95	21.51
			12	13	1	21.80	21.80	21.45
		16QAM	25	0	1	21.73	21.83	21.44
			1	0	1	22.22	22.36	22.19
			1	12	1	22.53	22.87	22.23
			1	24	1	22.25	22.36	22.09
			12	0	2	20.98	21.08	20.67
			12	7	2	20.94	21.16	20.67
			12	13	2	20.93	21.15	20.63
			25	0	2	20.94	21.03	20.67

9. PEAK TO AVERAGE RATIO

Test Procedure

Per KDB 971168 D01 Power Meas License Digital Systems v02r02;

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The PAR were measured on the Spectrum Analyzer.

Test Spec

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

9.1. CONDUCTED PEAK TO AVERAGE RESULT

GSM

Band	Channel	f [MHz]	Mode	Ratio [dB]	Limit [dB]
GSM850	190	836.6	GPRS	2.72	13.00
			EGPRS	5.73	
GSM1900	661	1880.0	GPRS	2.68	
			EGPRS	5.76	

CDMA

Band	Channel	f [MHz]	Mode	Ratio [dB]	Limit [dB]
BC0	384	836.52	1xRTT	3.00	13.00
			EVDO Rel.0	3.54	

WCDMA


Band	Channel	f [MHz]	Mode	Ratio [dB]	Limit [dB]
Band 5	4183	836.6	REL99	2.76	13.00
			HSDPA	2.85	
Band 2	9400	1880.0	REL99	2.93	
			HSDPA	3.09	

LTE


Band	BW [MHz]	Channel	f [MHz]	Mode	Ratio [dB]	Limit [dB]
Band 41	20	40740	2605.0	QPSK	2.69	13.00
				16QAM	3.31	
	15			QPSK	2.96	
				16QAM	3.81	
	10			QPSK	2.77	
				16QAM	3.75	
	5			QPSK	2.80	
				16QAM	3.54	

9.2. CONDUCTED PEAK TO AVERAGE PLOTS


GSM

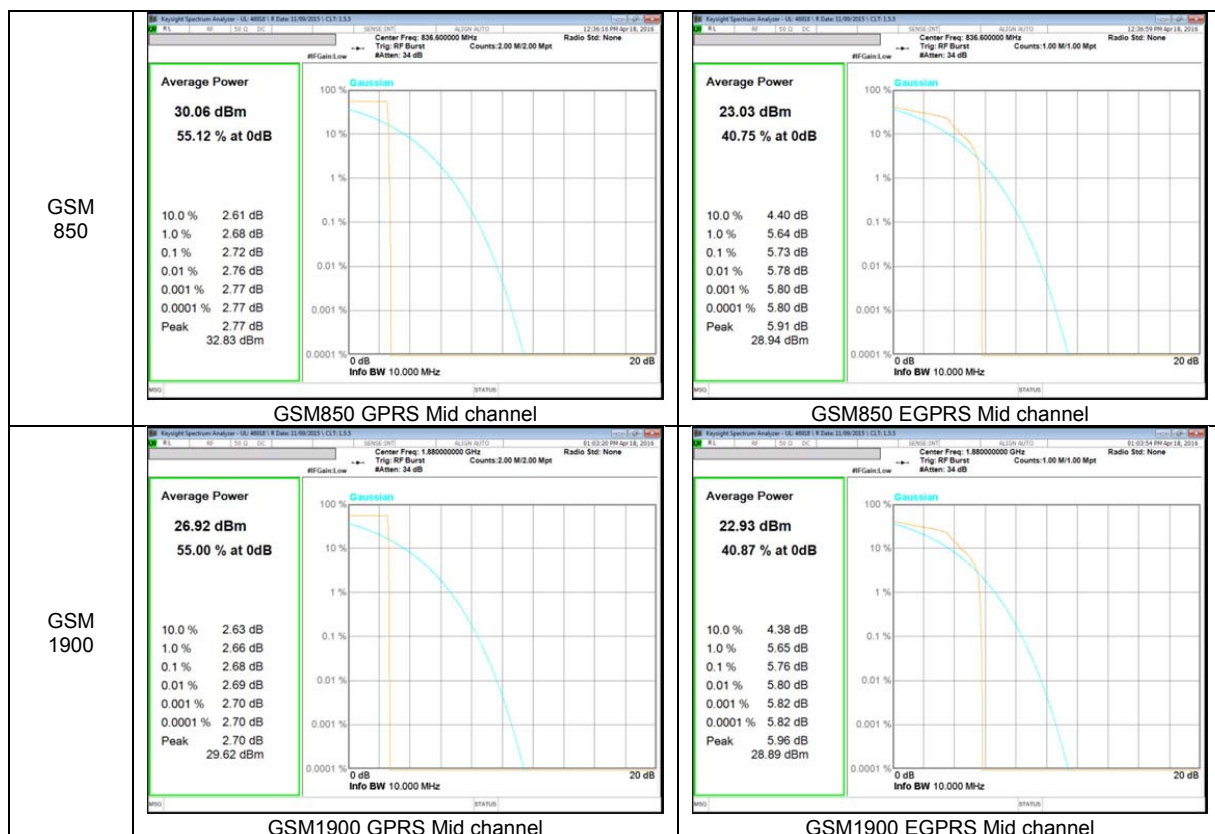









WCDMA

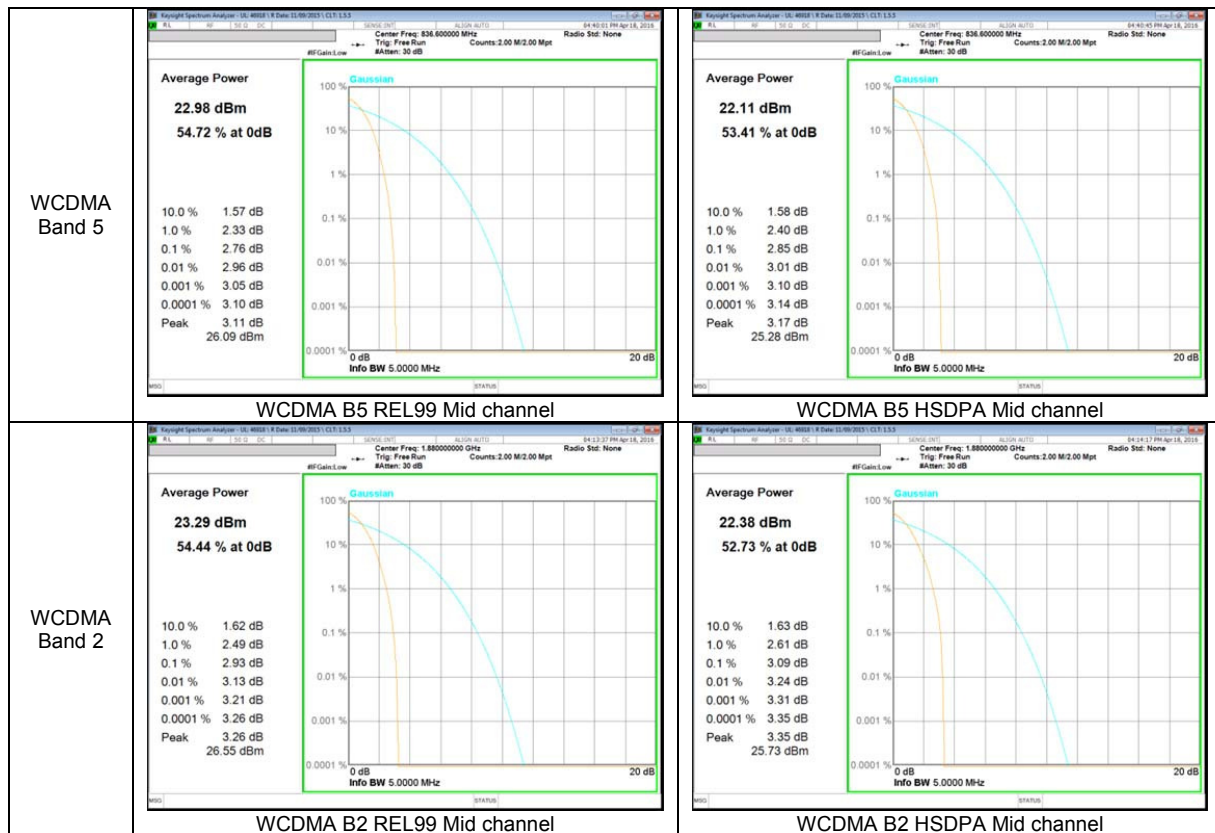

CDMA

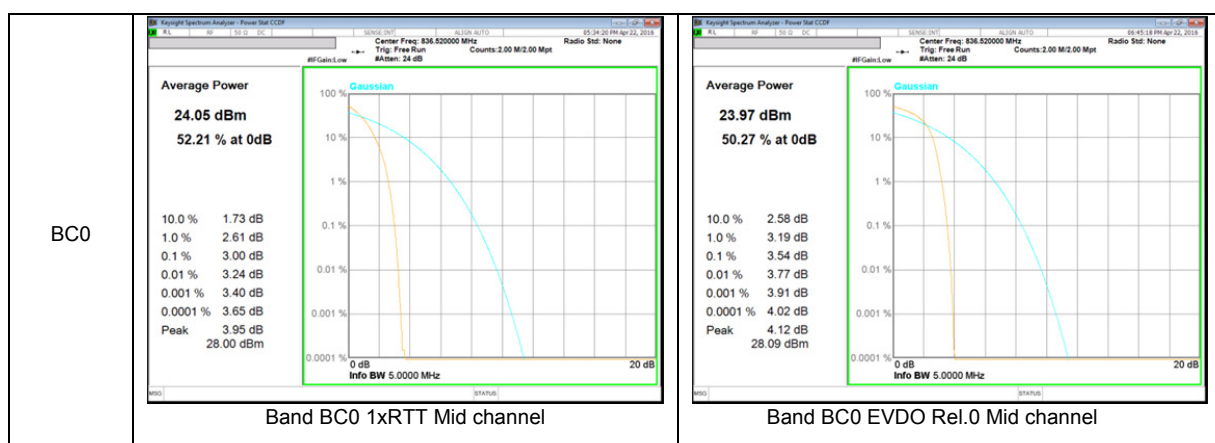

LTE Band 41

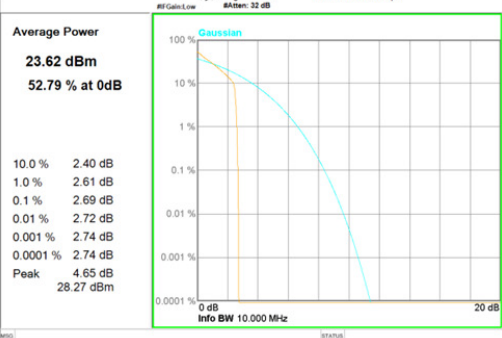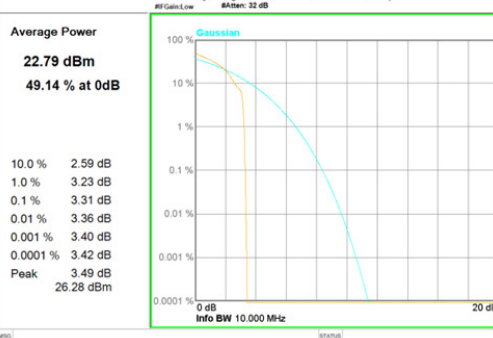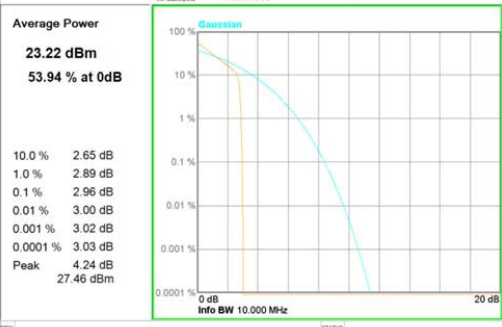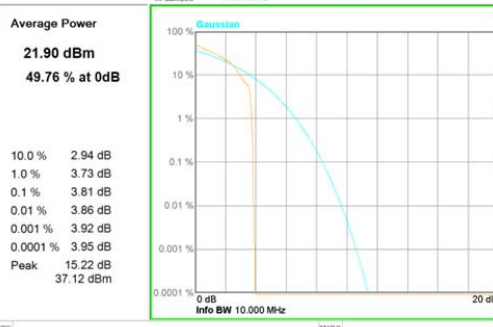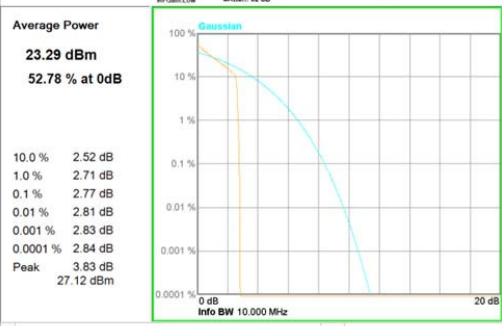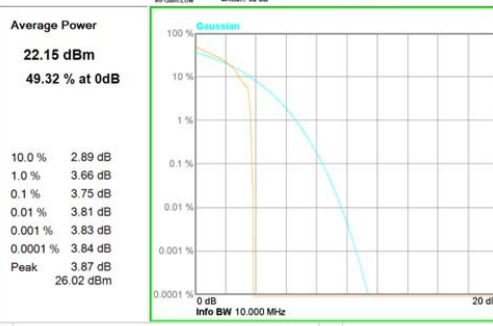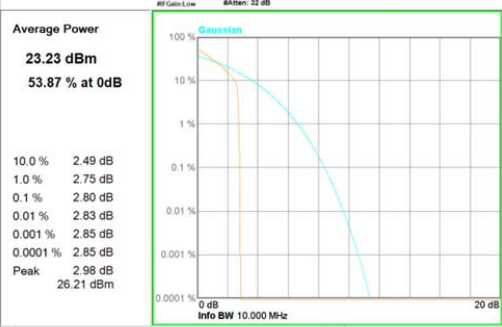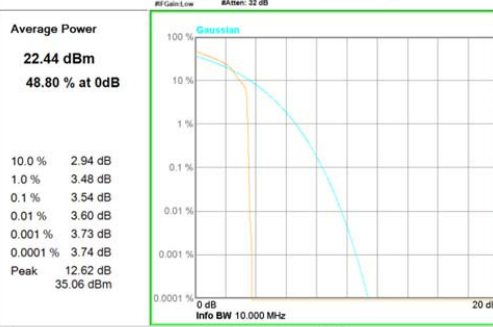LTE Band 41 20 MHz	 Average Power 23.62 dBm 52.79 % at 0dB 10.0 % 2.40 dB 1.0 % 2.61 dB 0.1 % 2.69 dB 0.01 % 2.72 dB 0.001 % 2.74 dB 0.0001 % 2.74 dB Peak 4.65 dB 26.27 dBm Info BW 10.000 MHz	 Average Power 22.79 dBm 49.14 % at 0dB 10.0 % 2.59 dB 1.0 % 3.23 dB 0.1 % 3.31 dB 0.01 % 3.36 dB 0.001 % 3.40 dB 0.0001 % 3.42 dB Peak 3.49 dB 26.28 dBm Info BW 10.000 MHz
LTE Band 41 15 MHz	 Average Power 23.22 dBm 53.94 % at 0dB 10.0 % 2.65 dB 1.0 % 2.89 dB 0.1 % 2.96 dB 0.01 % 3.00 dB 0.001 % 3.02 dB 0.0001 % 3.03 dB Peak 4.24 dB 27.46 dBm Info BW 10.000 MHz	 Average Power 21.90 dBm 49.76 % at 0dB 10.0 % 2.94 dB 1.0 % 3.73 dB 0.1 % 3.81 dB 0.01 % 3.86 dB 0.001 % 3.92 dB 0.0001 % 3.95 dB Peak 15.22 dB 37.12 dBm Info BW 10.000 MHz
LTE Band 41 10 MHz	 Average Power 23.29 dBm 52.78 % at 0dB 10.0 % 2.52 dB 1.0 % 2.71 dB 0.1 % 2.77 dB 0.01 % 2.81 dB 0.001 % 2.83 dB 0.0001 % 2.84 dB Peak 3.83 dB 27.12 dBm Info BW 10.000 MHz	 Average Power 22.15 dBm 49.32 % at 0dB 10.0 % 2.89 dB 1.0 % 3.66 dB 0.1 % 3.75 dB 0.01 % 3.81 dB 0.001 % 3.83 dB 0.0001 % 3.84 dB Peak 3.87 dB 26.02 dBm Info BW 10.000 MHz
LTE Band 41 5 MHz	 Average Power 23.23 dBm 53.87 % at 0dB 10.0 % 2.49 dB 1.0 % 2.75 dB 0.1 % 2.80 dB 0.01 % 2.83 dB 0.001 % 2.85 dB 0.0001 % 2.85 dB Peak 2.98 dB 26.21 dBm Info BW 10.000 MHz	 Average Power 22.44 dBm 48.80 % at 0dB 10.0 % 2.94 dB 1.0 % 3.48 dB 0.1 % 3.54 dB 0.01 % 3.60 dB 0.001 % 3.73 dB 0.0001 % 3.74 dB Peak 12.62 dB 35.06 dBm Info BW 10.000 MHz

10. LIMITS AND CONDUCTED RESULTS

10.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

(KDB 971168 D01 Power Meas License Digital Systems v02r02)

10.1.1. OCCUPIED BANDWIDTH RESULTS

GSM

Band	Mode	Channel	f [MHz]	99% BW [KHz]	26dB BW [KHz]
GSM850	GPRS	128	824.2	244.89	317.3
		190	836.6	247.87	315.0
		251	848.8	248.33	325.1
	EGPRS	128	824.2	231.15	294.1
		190	836.6	239.25	283.4
		251	848.8	251.61	316.3
GSM1900	GPRS	512	1850.2	248.75	307.6
		661	1880.0	249.70	317.1
		810	1909.8	245.55	315.7
	EGPRS	512	1850.2	241.98	309.8
		661	1880.0	243.88	310.1
		810	1909.8	245.38	308.2

CDMA

Band	Mode	Channel	f [MHz]	99% BW [MHz]	26dB BW [MHz]
BC0	1xRTT	1013	824.70	1.2731	1.427
		384	836.52	1.2772	1.421
		777	848.31	1.2743	1.432
	EVDO Rel.0	1013	824.70	1.2776	1.432
		384	836.52	1.2791	1.434
		777	848.31	1.2746	1.428

WCDMA

Band	Mode	Channel	f [MHz]	99% BW [MHz]	26dB BW [MHz]
Band 5	REL99	4132	826.4	4.1502	4.715
		4183	836.6	4.1451	4.720
		4233	846.6	4.1315	4.700
	HSDPA	4132	826.4	4.1577	4.708
		4183	836.6	4.1384	4.702
		4233	846.6	4.1356	4.712
Band 2	REL99	9262	1852.4	4.1232	4.712
		9400	1880.0	4.1271	4.672
		9538	1907.6	4.1190	4.692
	HSDPA	9262	1852.4	4.1061	4.677
		9400	1880.0	4.1309	4.667
		9538	1907.6	4.1094	4.687

LTE Band 41


Band	BW [MHz]	Channel	f [MHz]	Mode	99% BW [MHz]	26dB BW [MHz]
Band 41	20	40340	2565.0	QPSK	17.812	19.30
				16QAM	17.878	19.40
		40740	2605.0	QPSK	17.833	19.76
				16QAM	17.849	19.29
		41140	2645.0	QPSK	17.797	19.52
				16QAM	17.841	19.59
	15	40315	2562.5	QPSK	13.395	14.93
				16QAM	13.400	14.79
		40740	2605.0	QPSK	13.368	14.77
				16QAM	13.379	14.82
		41165	2647.5	QPSK	13.378	14.60
				16QAM	13.400	14.89
	10	40290	2560.0	QPSK	8.9487	10.06
				16QAM	8.9342	9.904
		40740	2605.0	QPSK	8.9387	10.19
				16QAM	8.9432	10.00
		41190	2650.0	QPSK	8.9494	10.05
				16QAM	8.9658	9.760
	5	40265	2557.5	QPSK	4.4809	4.932
				16QAM	4.4764	4.956
		40740	2605.0	QPSK	4.4773	4.985
				16QAM	4.4771	5.036
		41215	2652.5	QPSK	4.4730	4.945
				16QAM	4.4826	5.139

10.1.2. OCCUPIED BANDWIDTH PLOTS


GSM 850




GSM 1900

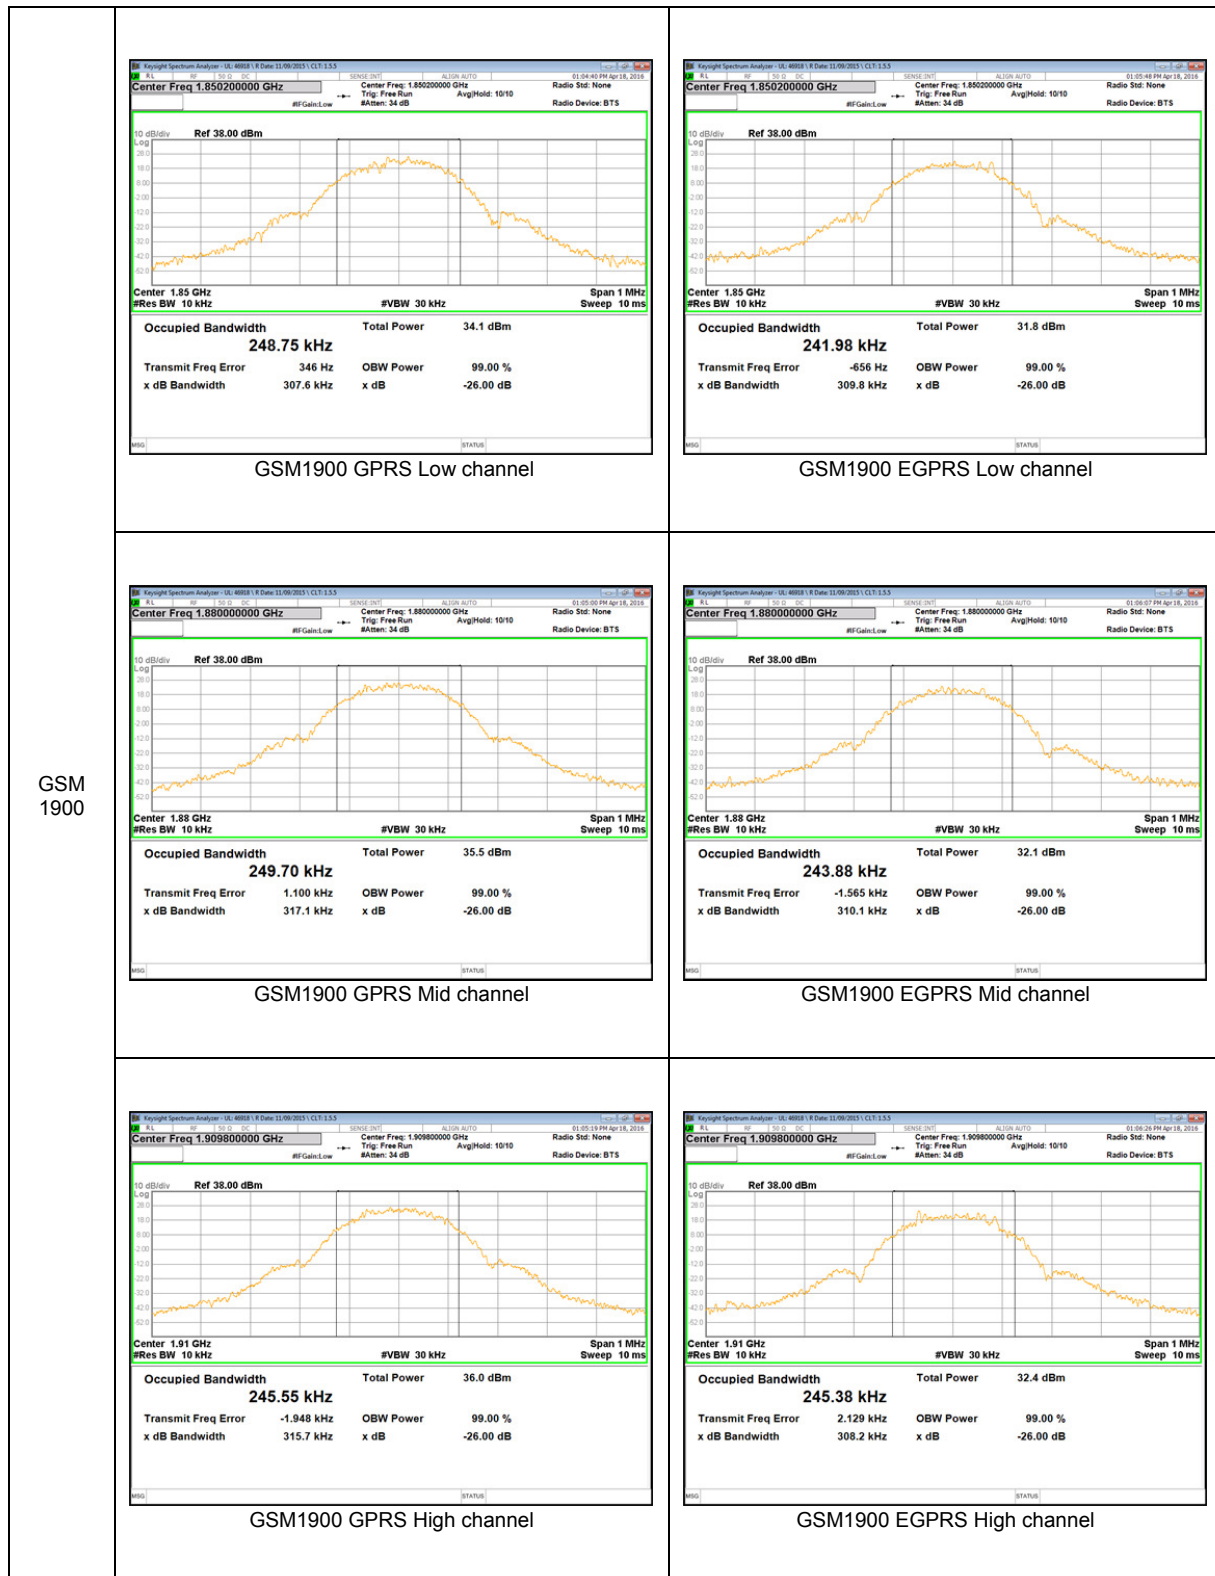


WCDMA Band 5

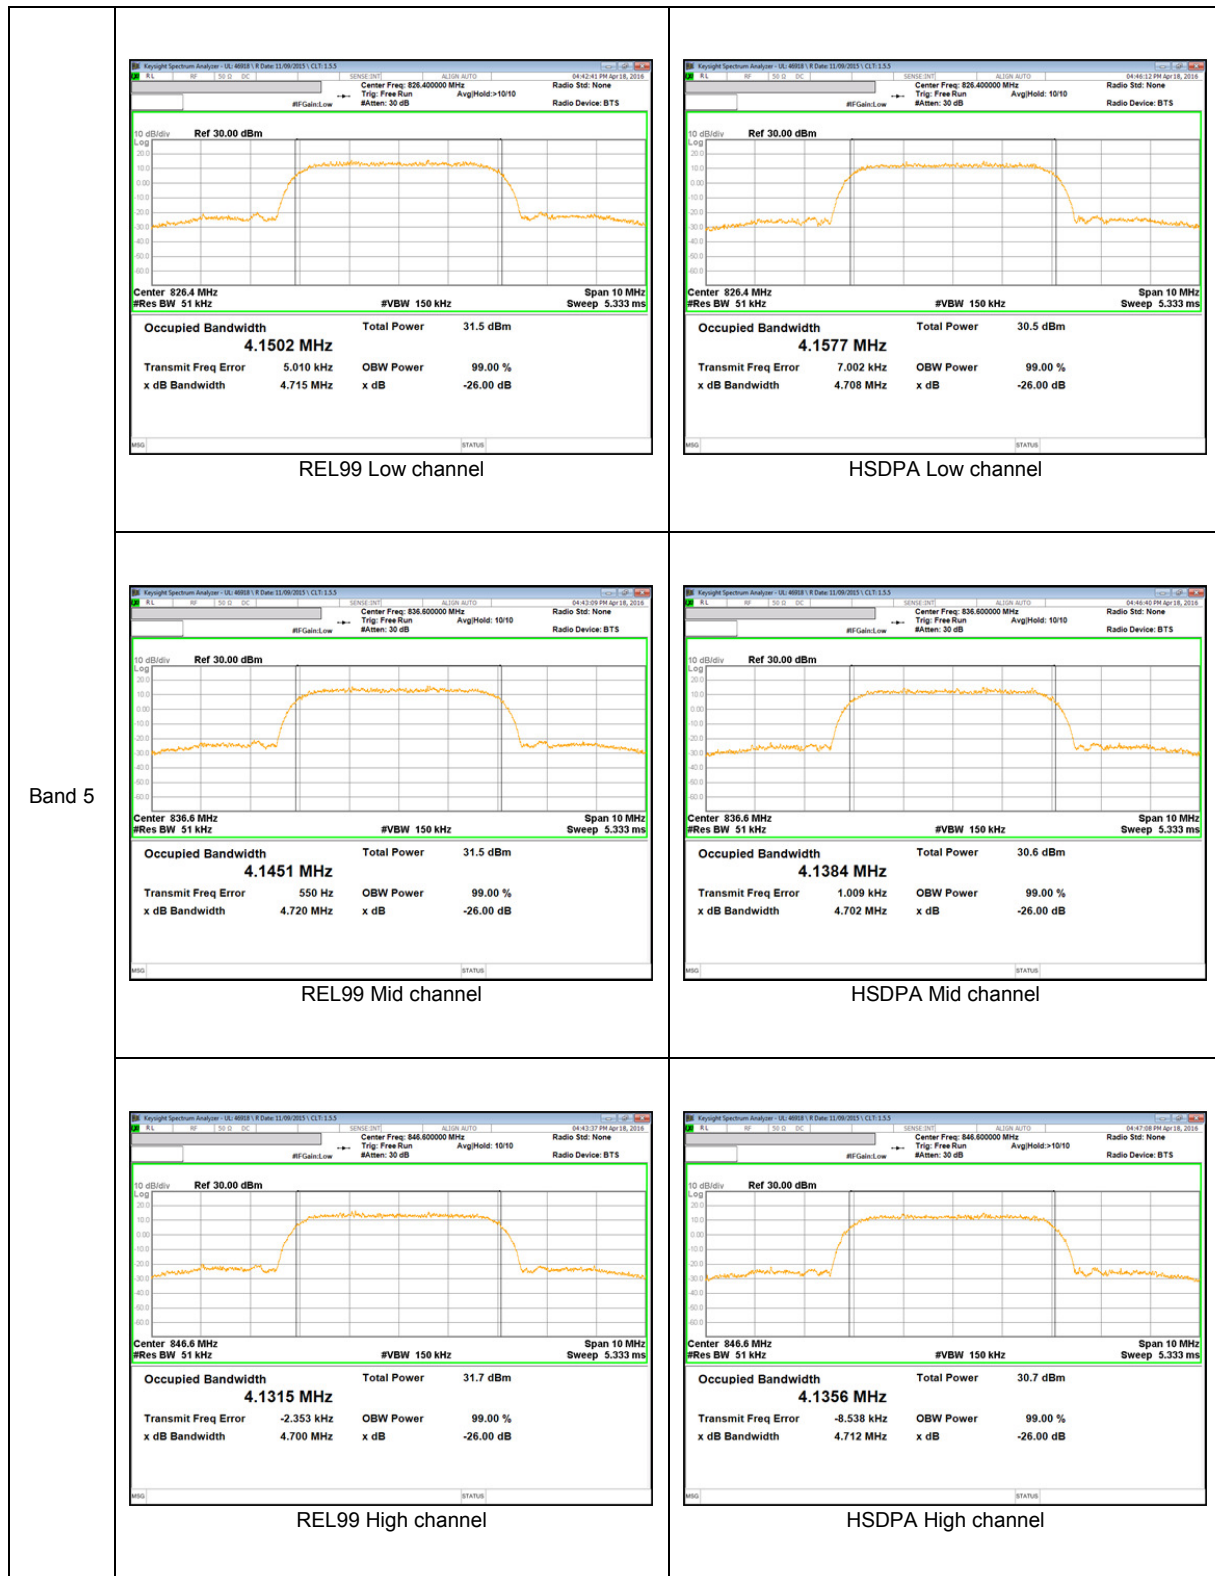



WCDMA Band 2

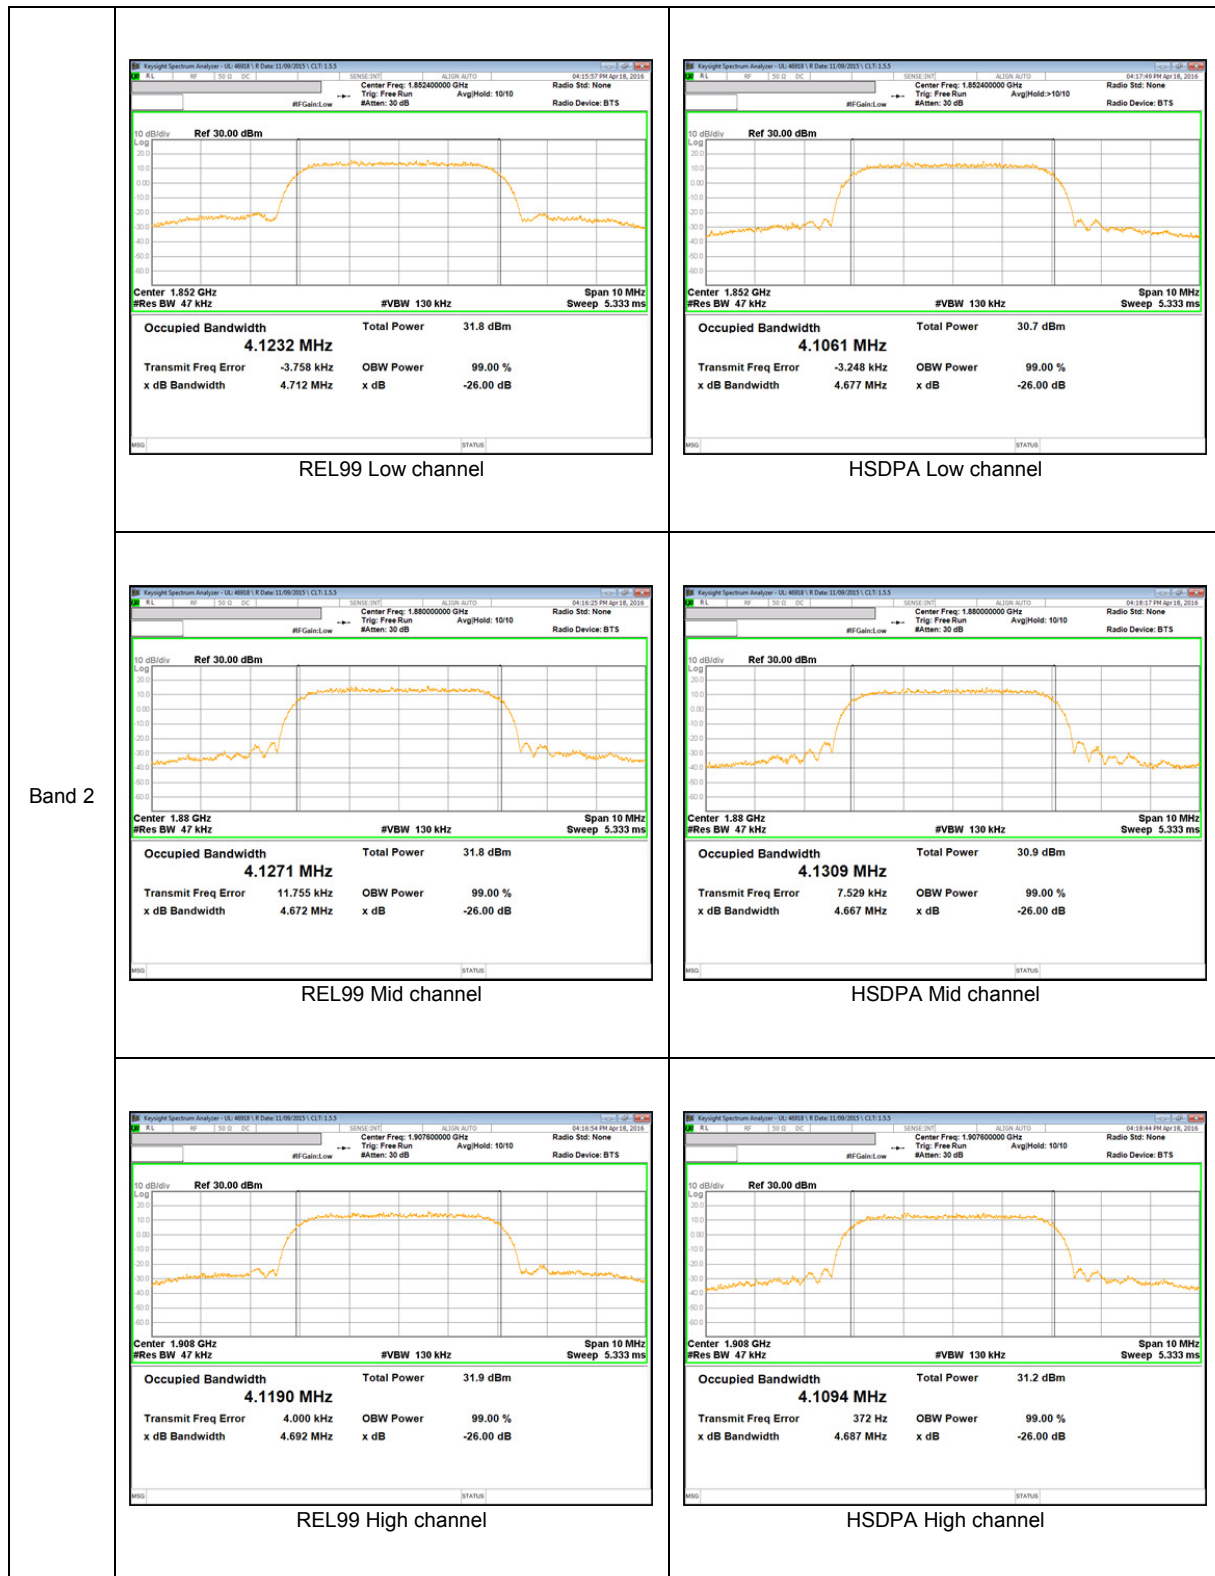


LTE Band 41

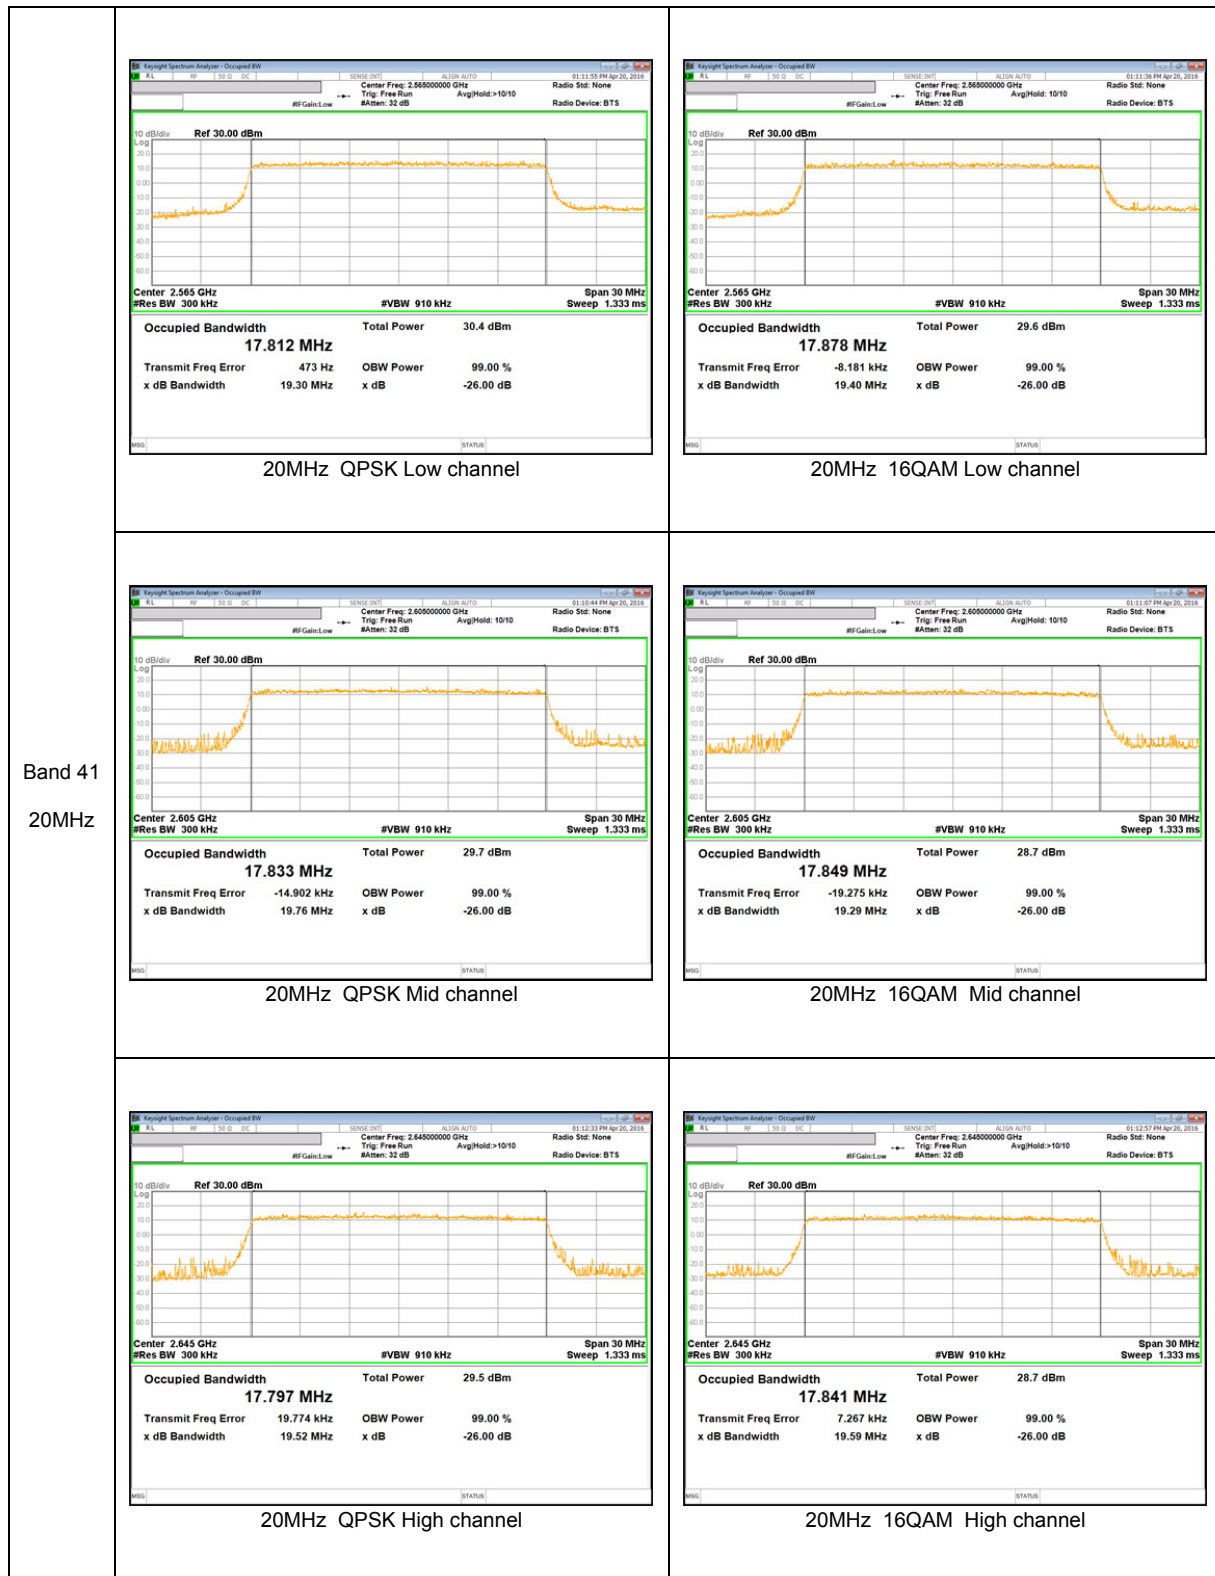

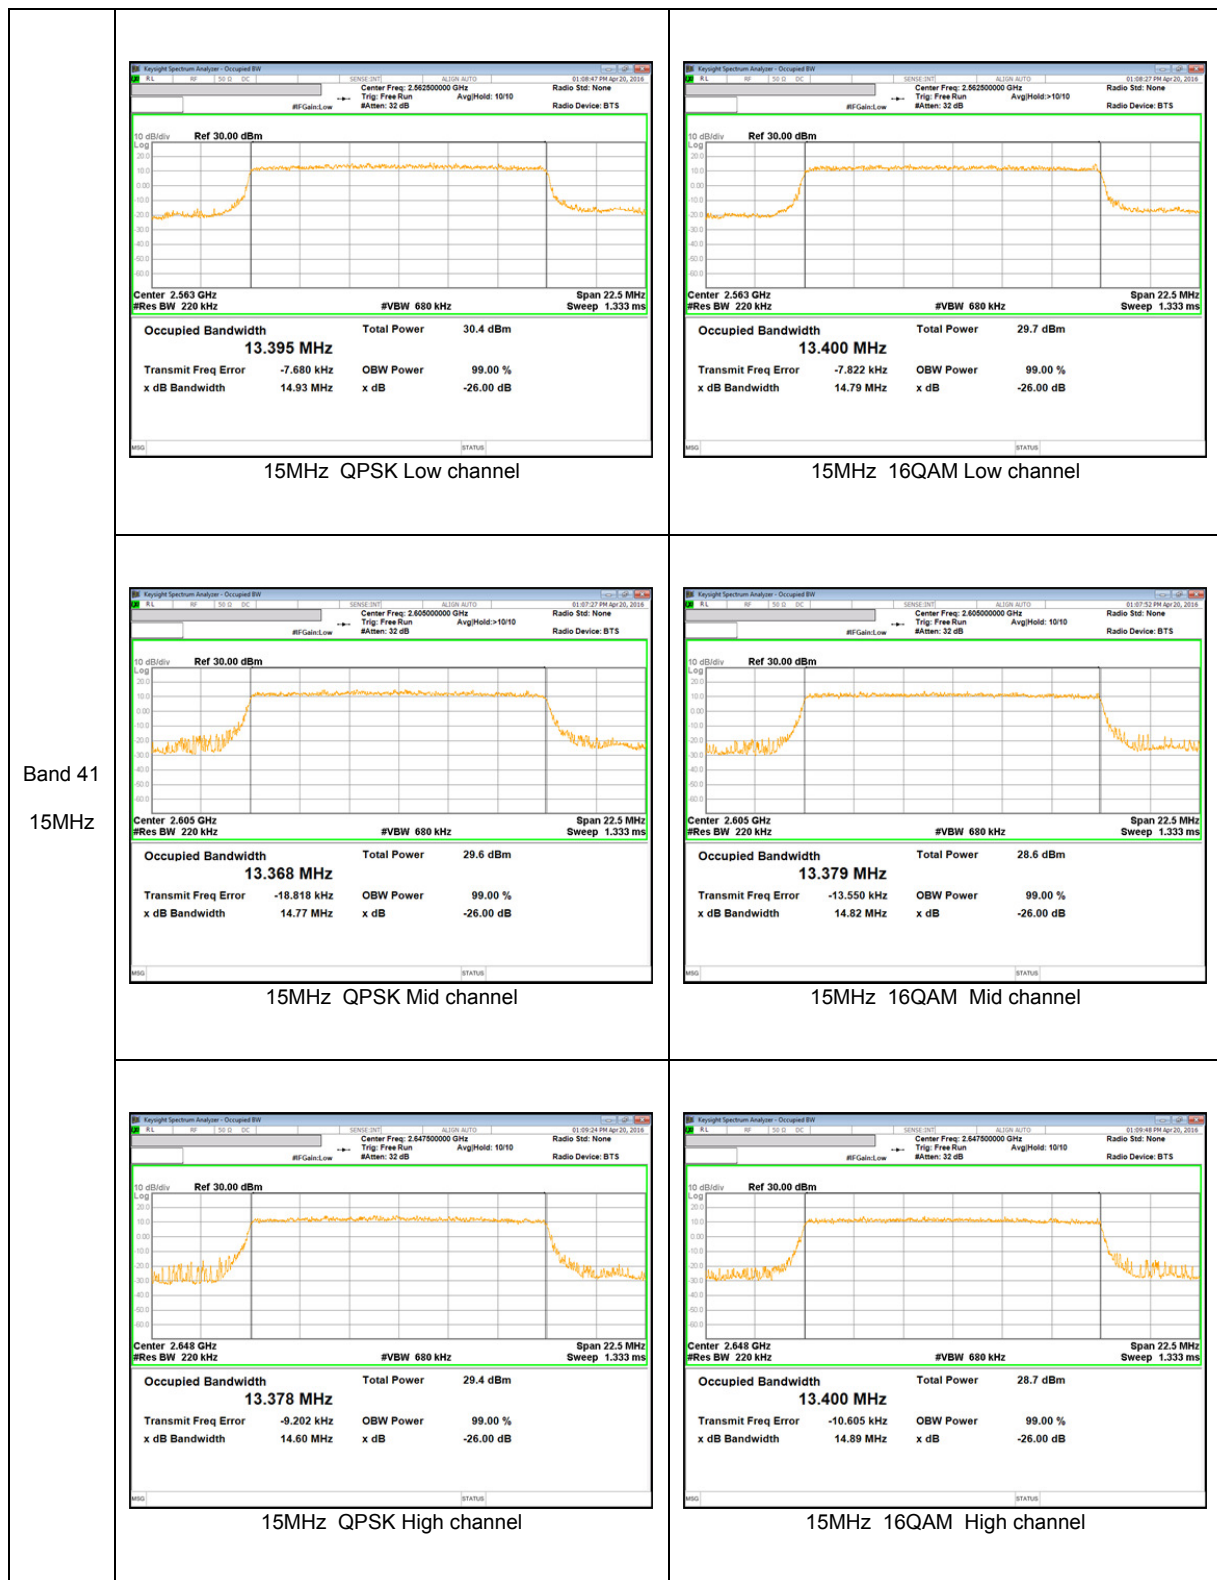

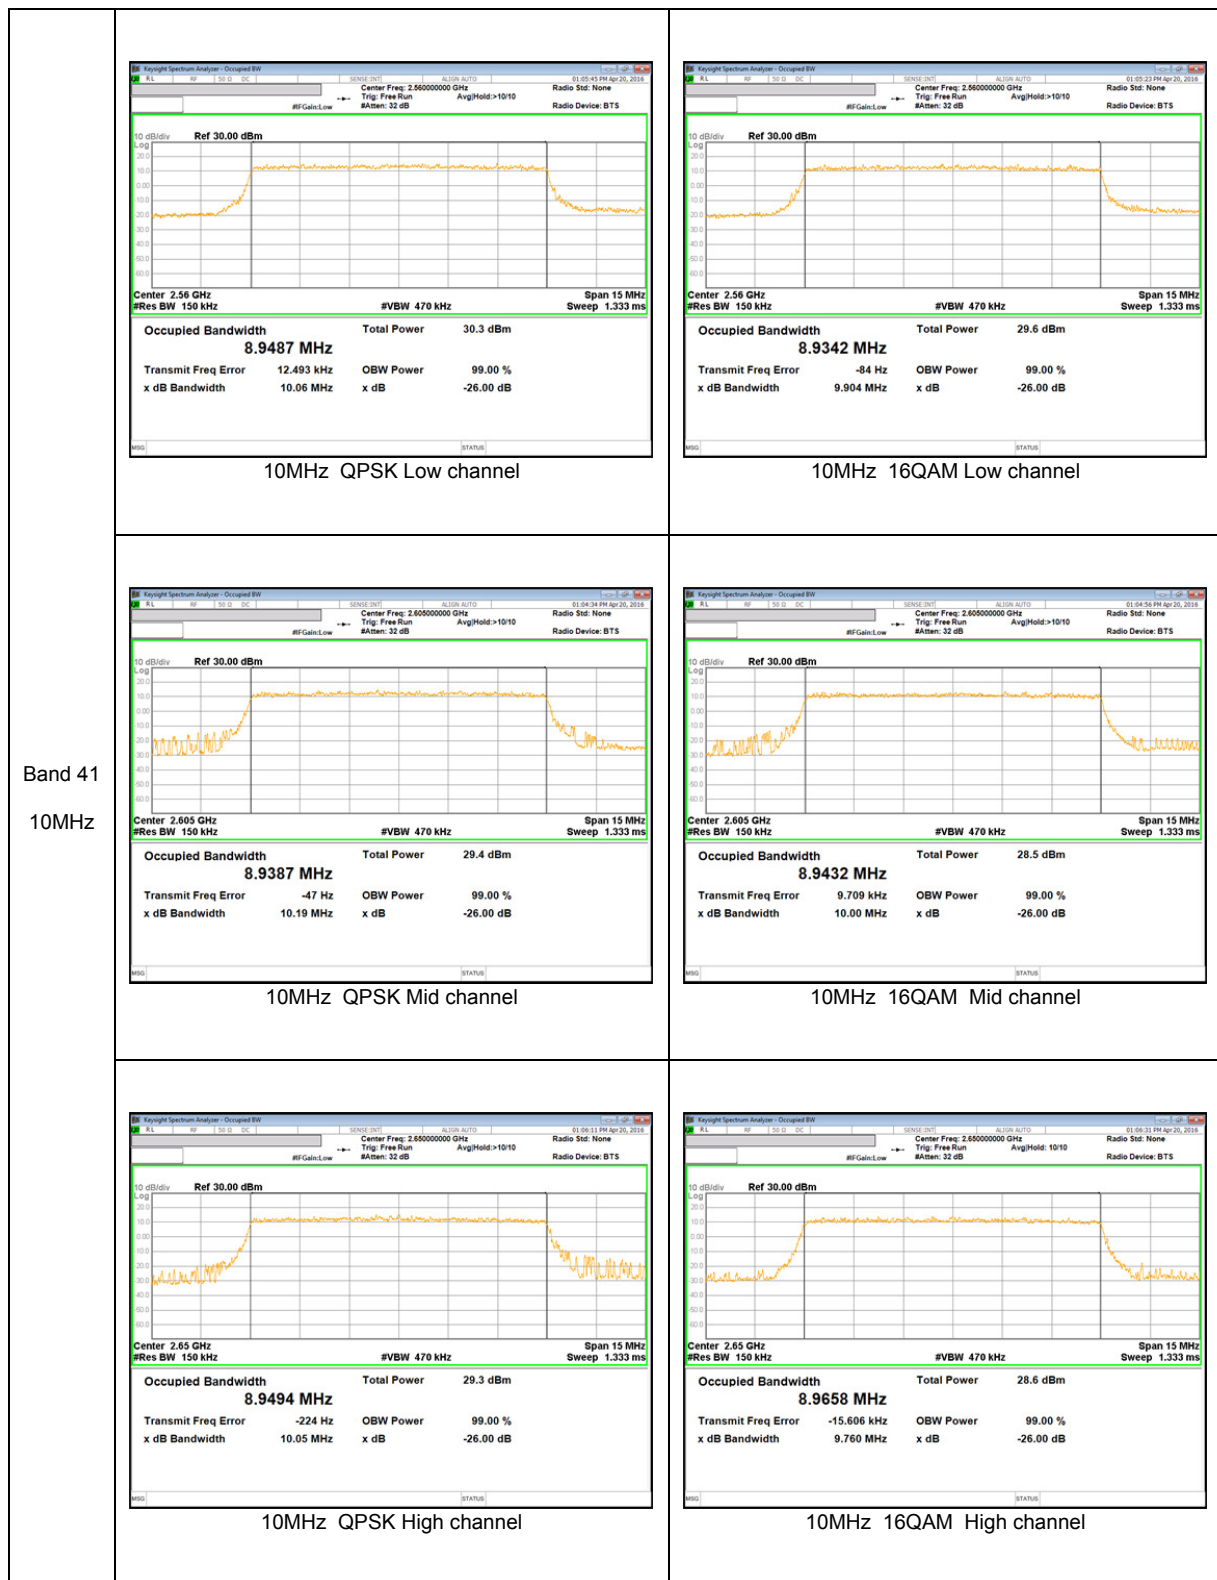

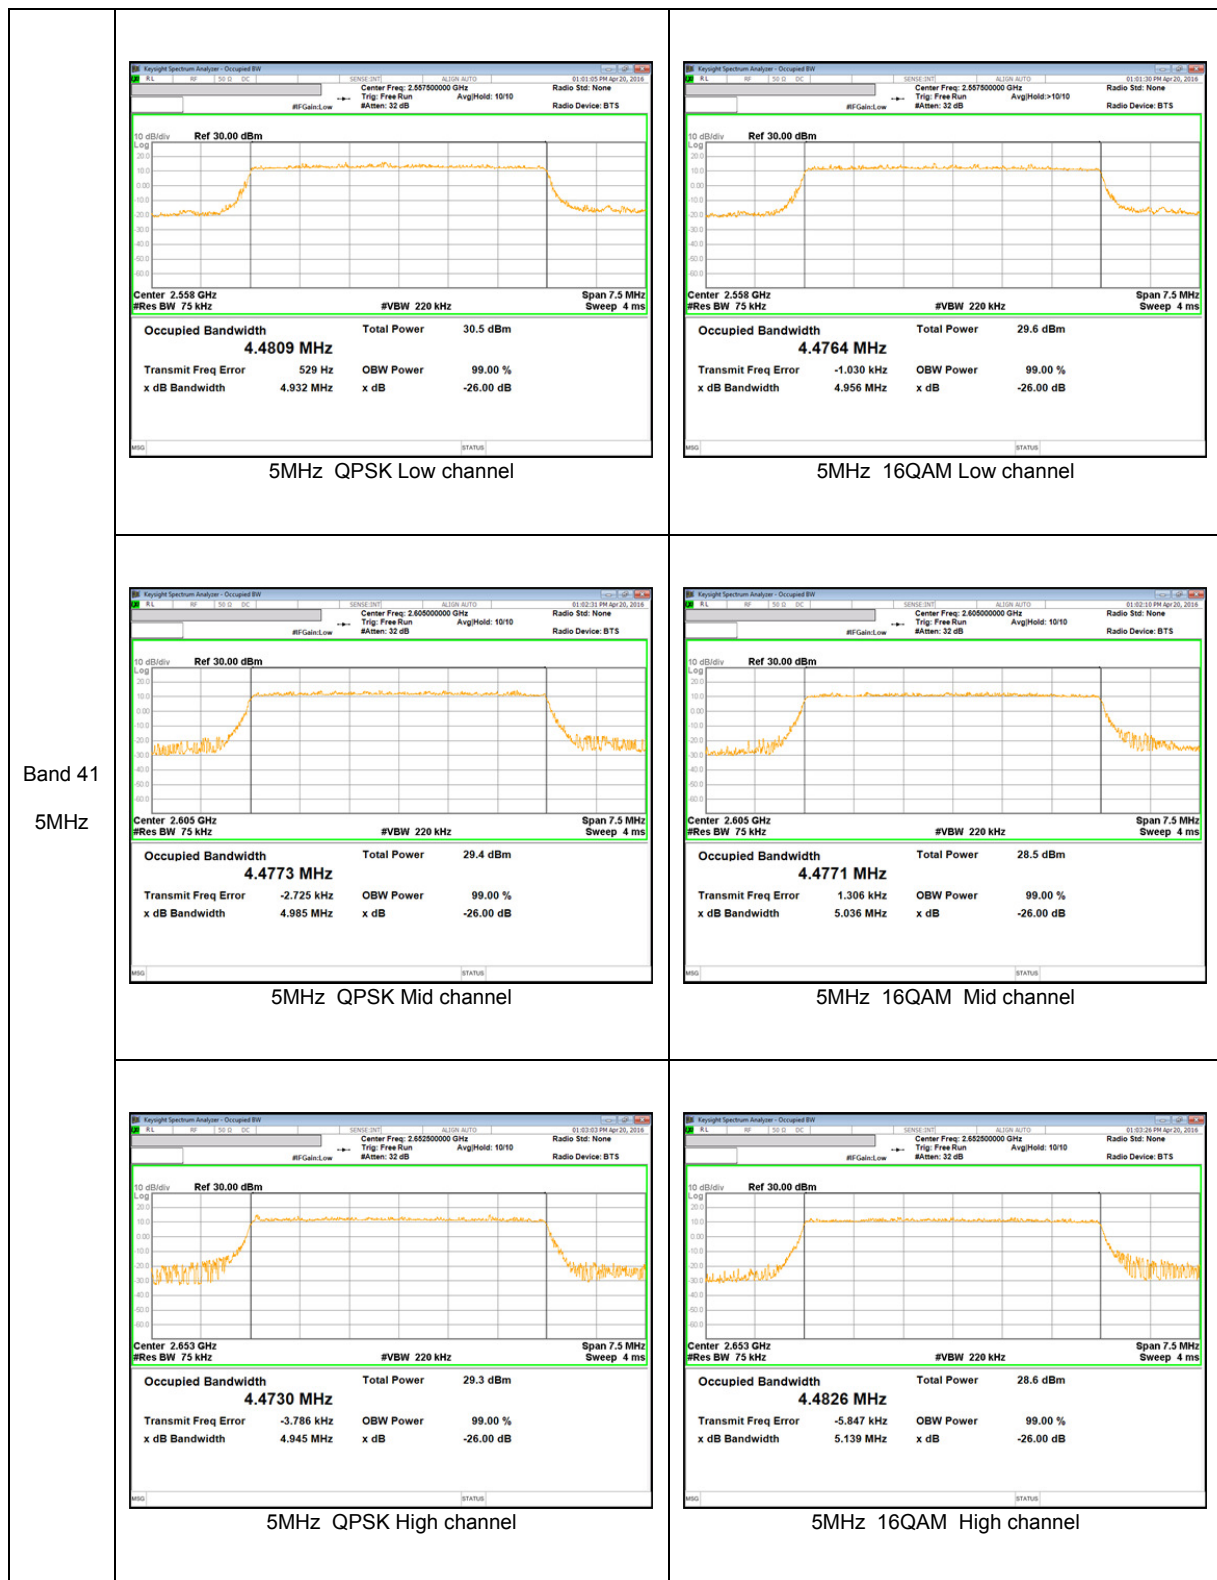

CDMA



10.2. BAND EDGE EMISSIONS

RULE PART(S)

FCC: §22.359, §24.238 and §27.53

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

Part 27.53(m) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

NOTE

LTE 41 Reading need apply 2.22dB duty cycle factor on the plot.

RESULTS

GSM

Band	Mode	Side	f [MHz]	Level [dBm]	Limit [dBm]
GSM850	GPRS	Lower	823.982	-15.903	-13.00
		Upper	849.028	-15.948	
	EGPRS	Lower	823.987	-23.895	
		Upper	849.033	-25.537	
GSM1900	GPRS	Lower	1849.982	-18.108	
		Upper	1910.023	-17.816	
	EGPRS	Lower	1849.992	-23.277	
		Upper	1910.018	-23.991	

WCDMA

Band	Mode	Side	f [MHz]	Level [dBm]	Limit [dBm]
Band 5	REL99	Lower	824	-23.742	-13.00
		Upper	849	-24.073	
	HSDPA	Lower	824	-25.205	
		Upper	849	-27.108	
Band 2	REL99	Lower	1850	-22.901	
		Upper	1910	-25.430	
	HSDPA	Lower	1850	-27.696	
		Upper	1910	-27.987	

CDMA

Band	Mode	Side	f [MHz]	Level [dBm]	Limit [dBm]
BC0	1xRTT	Lower	824	-16.644	-13.00
		Upper	849	-13.556	
	EVDO Rel.0	Lower	824	-17.202	
		Upper	849	-14.246	

LTE 41

Bandwidth	Mode	f [MHz]	RB Status	Side Trace	Level [dBm]	Limit [dBm]
20 MHz	QPSK	2565.0	1RB	Lower Trace 1	-27.5	-10.00
				Lower Trace 2	-30.95	-13.00
				Lower Trace 3	-42.56	-25.00
			FRB	Lower Trace 1	-20.69	-10.00
				Lower Trace 2	-28.29	-13.00
				Lower Trace 3	-41.61	-25.00
		2645.0	1RB	Upper Trace 1	-27.58	-10.00
				Upper Trace 2	-27.93	-13.00
				Upper Trace 3	-42.31	-25.00
			FRB	Upper Trace 1	-27.38	-10.00
				Upper Trace 2	-31.13	-13.00
				Upper Trace 3	-41.24	-25.00
	16QAM	2565.0	1RB	Lower Trace 1	-28.1	-10.00
				Lower Trace 2	-31.74	-13.00
				Lower Trace 3	-42.66	-25.00
			FRB	Lower Trace 1	-22.79	-10.00
				Lower Trace 2	-27.84	-13.00
				Lower Trace 3	-41.7	-25.00
		2645.0	1RB	Upper Trace 1	-27.77	-10.00
				Upper Trace 2	-28.63	-13.00
				Upper Trace 3	-42.36	-25.00
			FRB	Upper Trace 1	-28.38	-10.00
				Upper Trace 2	-31.93	-13.00
				Upper Trace 3	-40.97	-25.00

LTE 41 (Continue)

Bandwidth	Mode	f [MHz]	RB Status	Side Trace	Level [dBm]	Limit [dBm]
15 MHz	QPSK	2562.5	1RB	Lower Trace 1	-25.25	-10.00
				Lower Trace 2	-30.03	-13.00
				Lower Trace 3	-42.31	-25.00
			FRB	Lower Trace 1	-20.14	-10.00
				Lower Trace 2	-24.97	-13.00
				Lower Trace 3	-36.74	-25.00
		2647.5	1RB	Upper Trace 1	-24.47	-10.00
				Upper Trace 2	-28.13	-13.00
				Upper Trace 3	-42.04	-25.00
			FRB	Upper Trace 1	-23.85	-10.00
				Upper Trace 2	-29.94	-13.00
				Upper Trace 3	-38.04	-25.00
	16QAM	2562.5	1RB	Lower Trace 1	-24.38	-10.00
				Lower Trace 2	-30.75	-13.00
				Lower Trace 3	-42.03	-25.00
			FRB	Lower Trace 1	-20.89	-10.00
				Lower Trace 2	-26	-13.00
				Lower Trace 3	-36.25	-25.00
		2647.5	1RB	Upper Trace 1	-25.67	-10.00
				Upper Trace 2	-29.11	-13.00
				Upper Trace 3	-42.26	-25.00
			FRB	Upper Trace 1	-26.48	-10.00
				Upper Trace 2	-29.74	-13.00
				Upper Trace 3	-38.22	-25.00

LTE 41 (Continue)


Bandwidth	Mode	f [MHz]	RB Status	Side Trace	Level [dBm]	Limit [dBm]
10 MHz	QPSK	2560.0	1RB	Lower Trace 1	-26.22	-10.00
				Lower Trace 2	-30.62	-13.00
				Lower Trace 3	-42.27	-25.00
			FRB	Lower Trace 1	-17.58	-10.00
				Lower Trace 2	-24.4	-13.00
				Lower Trace 3	-34.78	-25.00
		2650.0	1RB	Upper Trace 1	-23.73	-10.00
				Upper Trace 2	-31.57	-13.00
				Upper Trace 3	-42.09	-25.00
			FRB	Upper Trace 1	-23.49	-10.00
				Upper Trace 2	-30.05	-13.00
				Upper Trace 3	-36.88	-25.00
	16QAM	2560.0	1RB	Lower Trace 1	-25.7	-10.00
				Lower Trace 2	-32.12	-13.00
				Lower Trace 3	-42.5	-25.00
			FRB	Lower Trace 1	-18.71	-10.00
				Lower Trace 2	-25.04	-13.00
				Lower Trace 3	-34.67	-25.00
		2650.0	1RB	Upper Trace 1	-24.48	-10.00
				Upper Trace 2	-33.88	-13.00
				Upper Trace 3	-42.15	-25.00
			FRB	Upper Trace 1	-25.31	-10.00
				Upper Trace 2	-30.91	-13.00
				Upper Trace 3	-35.98	-25.00

LTE 41 (Continue)

Bandwidth	Mode	f [MHz]	RB Status	Side Trace	Level [dBm]	Limit [dBm]
5 MHz	QPSK	2557.5	1RB	Lower Trace 1	-16.16	-10.00
				Lower Trace 2	-41.54	-13.00
				Lower Trace 3	-41.54	-25.00
			FRB	Lower Trace 1	-15.95	-10.00
				Lower Trace 2	-30.93	-13.00
				Lower Trace 3	-32.38	-25.00
		2652.5	1RB	Upper Trace 1	-15.22	-10.00
				Upper Trace 2	-41.75	-13.00
				Upper Trace 3	-41.62	-25.00
			FRB	Upper Trace 1	-23.05	-10.00
				Upper Trace 2	-32.77	-13.00
				Upper Trace 3	-33.74	-25.00
	16QAM	2557.5	1RB	Lower Trace 1	-16.98	-10.00
				Lower Trace 2	-41.47	-13.00
				Lower Trace 3	-41.56	-25.00
			FRB	Lower Trace 1	-16.71	-10.00
				Lower Trace 2	-30.78	-13.00
				Lower Trace 3	-33.06	-25.00
		2652.5	1RB	Upper Trace 1	-17.17	-10.00
				Upper Trace 2	-41.9	-13.00
				Upper Trace 3	-41.75	-25.00
			FRB	Upper Trace 1	-24.62	-10.00
				Upper Trace 2	-32.63	-13.00
				Upper Trace 3	-34.97	-25.00


10.2.1. BAND EDGE PLOTS

GSM



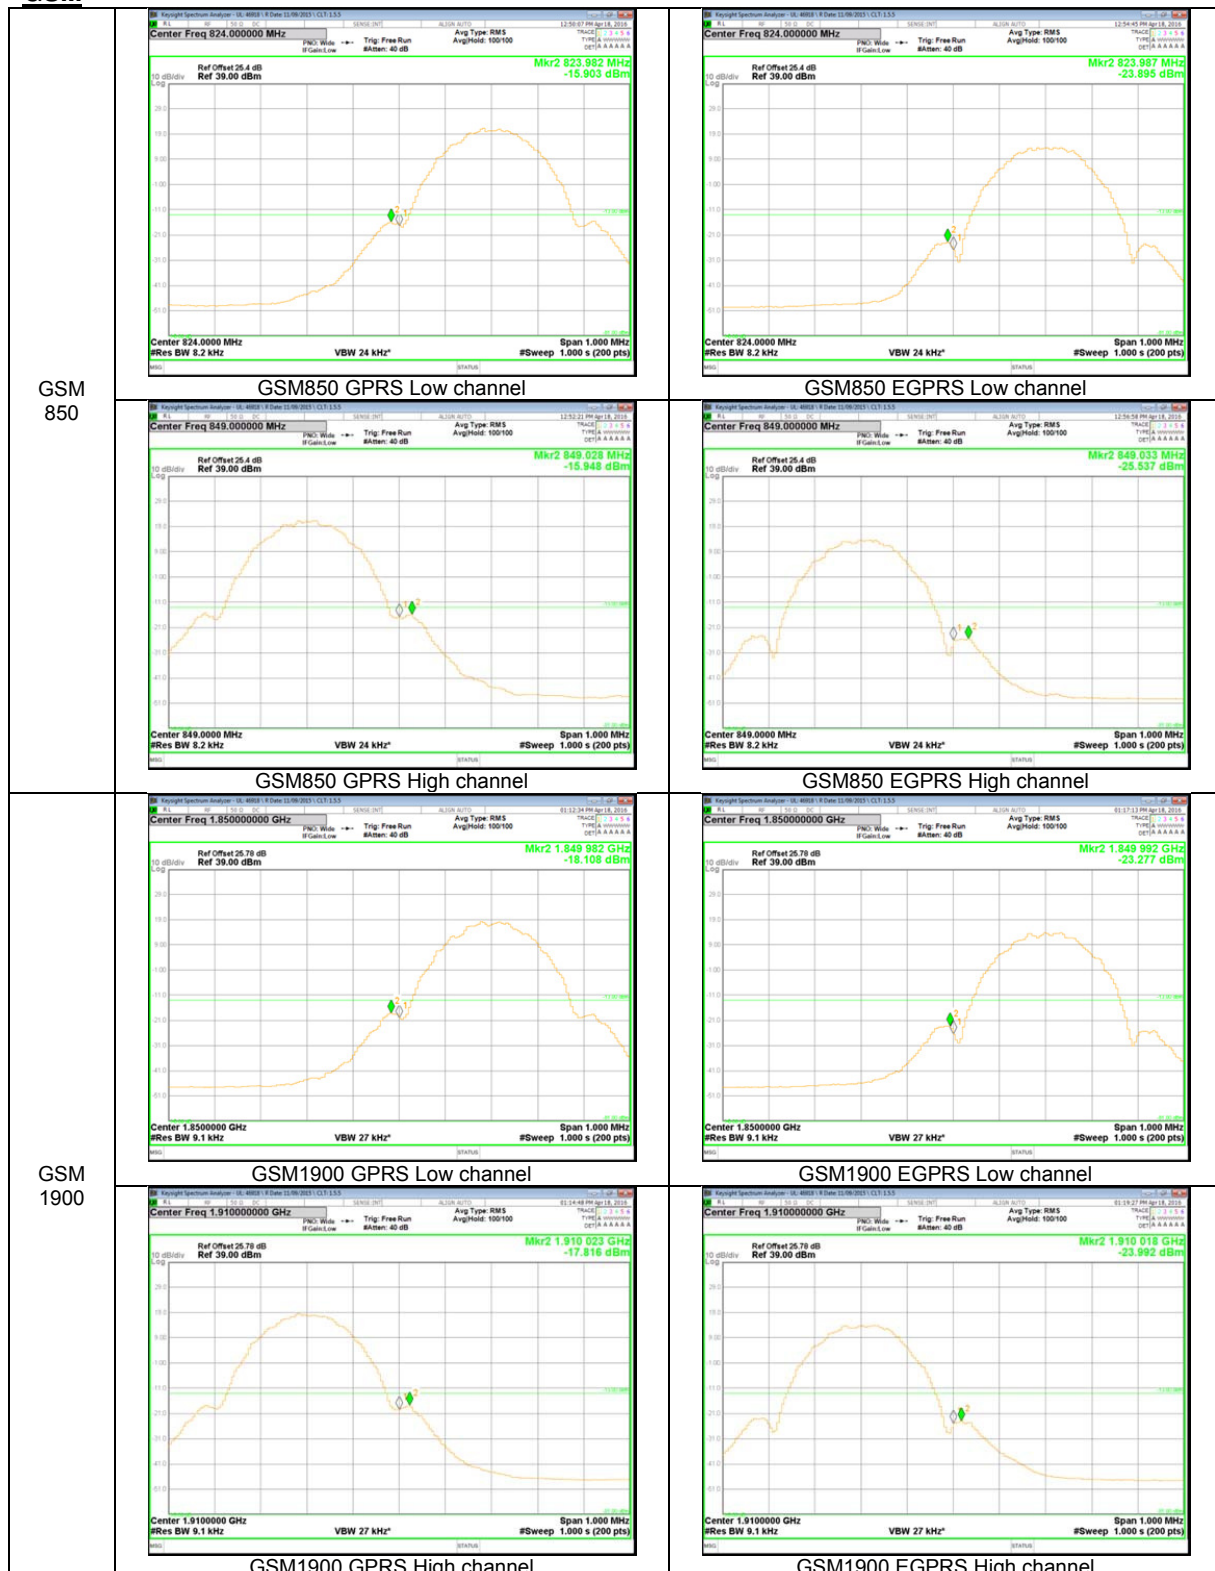


WCDMA

Band 5

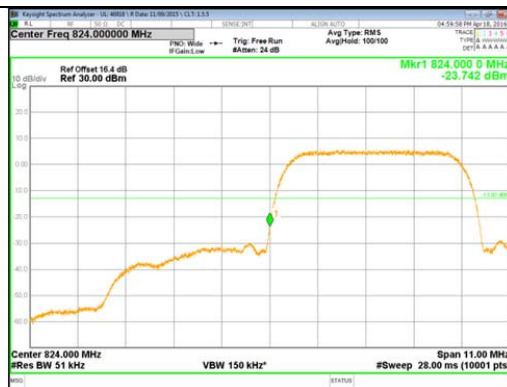

Band 2

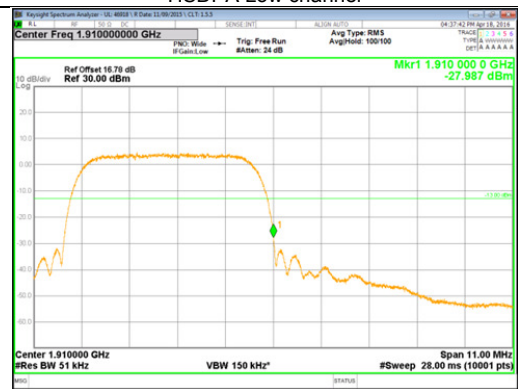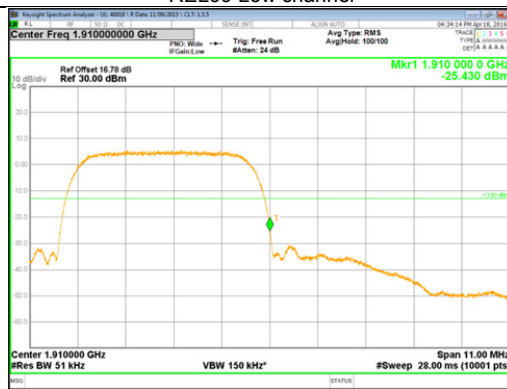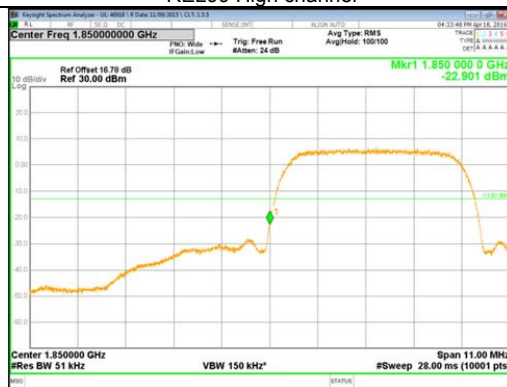

CDMA



10.2.1. EMISSION MASK PLOTS

LTE Band 41

