



SAR EVALUATION REPORT

Applicant Name:

Samsung Electronics Co., Ltd.
129, Samsung-ro, Maetan dong,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

12/12/16 - 01/24/17

Test Site/Location:

PCTEST Lab, Columbia, MD, USA

Document Serial No.:

0Y1612131940.A3L

FCC ID:

A3LSMT825

APPLICANT:

SAMSUNG ELECTRONICS CO., LTD.

DUT Type:

Portable Tablet

Application Type:

Certification

FCC Rule Part(s):

CFR §2.1093

Model:

SM-T825

Equipment Class	Band & Mode	Tx Frequency	SAR
			1 gm Body W/kg
PCB	GSM/GPRS/EDGE 850	824.20 - 848.80 MHz	1.10
PCB	GSM/GPRS/EDGE 1900	1850.20 - 1909.80 MHz	1.07
PCB	UMTS 850	826.40 - 846.60 MHz	1.07
PCB	UMTS 1750	1712.4 - 1752.6 MHz	1.09
PCB	UMTS 1900	1852.4 - 1907.6 MHz	0.96
PCB	LTE Band 17	706.5 - 713.5 MHz	1.09
PCB	LTE Band 5 (Cell)	824.7 - 848.3 MHz	0.76
PCB	LTE Band 4 (AWS)	1710.7 - 1754.3 MHz	1.09
PCB	LTE Band 2 (PCS)	1850.7 - 1909.3 MHz	0.74
DTS	2.4 GHz WLAN	2412 - 2472 MHz	0.96
NII	U-NII-1	5180 - 5240 MHz	N/A
NII	U-NII-2A	5260 - 5320 MHz	1.08
NII	U-NII-2C	5500 - 5720 MHz	1.09
NII	U-NII-3	5745 - 5825 MHz	0.78
DSS	Bluetooth	2402 - 2480 MHz	0.11
Simultaneous SAR per KDB 690783 D01v01r03:			1.49

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.7 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.


Randy Ortanez
President



The SAR Tick is an initiative of the Mobile Manufacturers Forum (MMF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MMF. Further details can be obtained by emailing: sartick@mmfai.info.

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 1 of 71

T A B L E O F C O N T E N T S

1	DEVICE UNDER TEST	3
2	LTE INFORMATION	8
3	INTRODUCTION	9
4	DOSIMETRIC ASSESSMENT	10
5	TEST CONFIGURATION POSITIONS.....	11
6	RF EXPOSURE LIMITS	12
7	FCC MEASUREMENT PROCEDURES.....	13
8	RF CONDUCTED POWERS.....	18
9	SYSTEM VERIFICATION.....	43
10	SAR DATA SUMMARY	45
11	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	53
12	SAR MEASUREMENT VARIABILITY	66
13	EQUIPMENT LIST.....	67
14	MEASUREMENT UNCERTAINTIES.....	68
15	CONCLUSION.....	69
16	REFERENCES	70
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES		
APPENDIX D: SAR TISSUE SPECIFICATIONS		
APPENDIX E: SAR SYSTEM VALIDATION		
APPENDIX F: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS		
APPENDIX G: SENSOR TRIGGERING DATA SUMMARY		

FCC ID: A3LSMT825	 SAR EVALUATION REPORT 	Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet
		Page 2 of 71

1 DEVICE UNDER TEST

1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
GSM/GPRS/EDGE 850	Voice/Data	824.20 - 848.80 MHz
GSM/GPRS/EDGE 1900	Voice/Data	1850.20 - 1909.80 MHz
UMTS 850	Voice/Data	826.40 - 846.60 MHz
UMTS 1750	Voice/Data	1712.4 - 1752.6 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
LTE Band 17	Data	706.5 - 713.5 MHz
LTE Band 5 (Cell)	Data	824.7 - 848.3 MHz
LTE Band 4 (AWS)	Data	1710.7 - 1754.3 MHz
LTE Band 2 (PCS)	Data	1850.7 - 1909.3 MHz
2.4 GHz WLAN	Data	2412 - 2472 MHz
U-NII-1	Data	5180 - 5240 MHz
U-NII-2A	Data	5260 - 5320 MHz
U-NII-2C	Data	5500 - 5720 MHz
U-NII-3	Data	5745 - 5825 MHz
Bluetooth	Data	2402 - 2480 MHz
ANT+	Data	2402 - 2480 MHz

1.2 Power Reduction for SAR

This device uses a power reduction mechanism for SAR compliance. The power reduction mechanism is activated when the device is used in close proximity to the user's body. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device. Detailed descriptions of the power reduction mechanism are included in the operational description.

1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

1.3.1 Maximum Output Powers

Mode / Band		Voice (dBm)	Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
		1 TX Slot	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots
GSM/GPRS/EDGE 850	Maximum	33.5	33.5	31.5	29.5	28.0	27.0	26.0	24.0	23.0
	Nominal	33.0	33.0	31.0	29.0	27.5	26.5	25.5	23.5	22.5
GSM/GPRS/EDGE 1900	Maximum	30.5	30.5	29.0	27.0	25.0	26.5	25.0	23.5	22.0
	Nominal	30.0	30.0	28.5	26.5	24.5	26.0	24.5	23.0	21.5

Mode / Band		Modulated Average (dBm)			
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA	3GPP DC-HSDPA
UMTS Band 5 (850 MHz)	Maximum	24.5	23.5	23.5	23.5
	Nominal	24.0	23.0	23.0	23.0
UMTS Band 4 (1750 MHz)	Maximum	24.0	23.5	23.5	23.5
	Nominal	23.5	23.0	23.0	23.0
UMTS Band 2 (1900 MHz)	Maximum	24.0	23.0	23.0	23.0
	Nominal	23.5	22.5	22.5	22.5

FCC ID: A3LSMT825	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet	Page 3 of 71

Mode / Band		Modulated Average (dBm)
LTE Band 17	Maximum	23.5
	Nominal	23.0
LTE Band 5 (Cell)	Maximum	24.5
	Nominal	24.0
LTE Band 4 (AWS)	Maximum	24.1
	Nominal	23.6
LTE Band 2 (PCS)	Maximum	24.0
	Nominal	23.5

Mode / Band		Modulated Average - Single Tx Chain (dBm)		
		Ch. 1-11	Ch. 12	Ch. 13
IEEE 802.11b (2.4 GHz)	Maximum	14.0	5.5	5.5
	Nominal	13.5	5.0	5.0
IEEE 802.11g (2.4 GHz)	Maximum	14.0	5.5	5.5
	Nominal	13.5	5.0	5.0
IEEE 802.11n (2.4 GHz)	Maximum	14.0	5.5	5.5
	Nominal	13.5	5.0	5.0

Mode / Band		Modulated Average - Single Tx Chain (dBm)		
		20 MHz Bandwidth	40 MHz Bandwidth	80 MHz Bandwidth
IEEE 802.11a (5 GHz)	Maximum	11.0		
	Nominal	10.5		
IEEE 802.11n (5 GHz)	Maximum	11.0	11.0	
	Nominal	10.5	10.5	
IEEE 802.11ac (5 GHz)	Maximum	11.0	11.0	11.0
	Nominal	10.5	10.5	10.5

Mode / Band		Modulated Average - MIMO (dBm)		
		Ch. 1-11	Ch. 12	Ch. 13
IEEE 802.11g (2.4 GHz)	Maximum	17.0	8.5	8.5
	Nominal	16.5	8.0	8.0
IEEE 802.11n (2.4 GHz)	Maximum	17.0	8.5	8.5
	Nominal	16.5	8.0	8.0

Mode / Band		Modulated Average - MIMO (dBm)		
		20 MHz Bandwidth	40 MHz Bandwidth	80 MHz Bandwidth
IEEE 802.11a (5 GHz)	Maximum	14.0		
	Nominal	13.5		
IEEE 802.11n (5 GHz)	Maximum	14.0	14.0	
	Nominal	13.5	13.5	
IEEE 802.11ac (5 GHz)	Maximum	14.0	14.0	14.0
	Nominal	13.5	13.5	13.5

Mode / Band		Modulated Average (dBm)
Bluetooth	Maximum	11.0
	Nominal	10.5
Bluetooth LE	Maximum	3.0
	Nominal	2.5

FCC ID: A3LSMT825	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet	Page 4 of 71

1.3.2 Reduced Output Powers

Mode / Band		Voice (dBm)	Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
		1 TX Slot	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots
GSM/GPRS/EDGE 850	Maximum	25.0	25.0	20.5	20.0	17.0	23.0	20.5	19.0	17.0
	Nominal	24.5	24.5	20.0	19.5	16.5	22.5	20.0	18.5	16.5
GSM/GPRS/EDGE 1900	Maximum	22.0	22.0	20.5	18.5	18.5	18.5	17.0	15.5	15.5
	Nominal	21.5	21.5	20.0	18.0	18.0	18.0	16.5	15.0	15.0

Mode / Band		Modulated Average (dBm)			
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA	3GPP DC-HSDPA
UMTS Band 5 (850 MHz)	Maximum	17.0	16.5	16.5	16.5
	Nominal	16.5	16.0	16.0	16.0
UMTS Band 4 (1750 MHz)	Maximum	14.0	13.5	13.5	13.5
	Nominal	13.5	13.0	13.0	13.0
UMTS Band 2 (1900 MHz)	Maximum	14.0	13.5	13.5	13.5
	Nominal	13.5	13.0	13.0	13.0

Mode / Band		Modulated Average (dBm)
LTE Band 17	Maximum	17.0
	Nominal	16.5
LTE Band 5 (Cell)	Maximum	16.0
	Nominal	15.5
LTE Band 4 (AWS)	Maximum	14.0
	Nominal	13.5
LTE Band 2 (PCS)	Maximum	14.0
	Nominal	13.5

1.4 DUT Antenna Locations

The overall diagonal dimension of the device is > 200 mm. A diagram showing the location of the device antennas can be found in Appendix F. Exact antenna dimensions and separation distances are shown in the Technical Descriptions in the FCC filings.

Table 1-1
Device Edges/Sides for SAR Testing

Mode	Back	Top	Bottom	Right	Left
GPRS 850	Yes	Yes	No	Yes	Yes
GPRS 1900	Yes	Yes	No	Yes	Yes
UMTS 850	Yes	Yes	No	Yes	Yes
UMTS 1750	Yes	Yes	No	Yes	Yes
UMTS 1900	Yes	Yes	No	Yes	Yes
LTE Band 17	Yes	Yes	No	Yes	Yes
LTE Band 5 (Cell)	Yes	Yes	No	Yes	Yes
LTE Band 4 (AWS)	Yes	Yes	No	Yes	Yes
LTE Band 2 (PCS)	Yes	Yes	No	Yes	Yes
2.4 GHz WLAN Ant 1	Yes	No	Yes	Yes	No
2.4 GHz WLAN Ant 2	Yes	No	Yes	No	Yes
5 GHz WLAN Ant 1	Yes	No	Yes	Yes	No
5 GHz WLAN Ant 2	Yes	No	Yes	No	Yes
Bluetooth	Yes	No	Yes	Yes	No

Note: Per FCC KDB Publication 616217 D04v01r01, particular edges were not required to be evaluated for SAR based on the SAR exclusion threshold in KDB 447498 D01V06. Additional edges may have been evaluated for simultaneous transmission analysis.

FCC ID: A3LSMT825	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet	Page 5 of 71

1.5 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the DUT are shown in Figure 1-1 and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.



Figure 1-1
Simultaneous Transmission Paths

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06 4.3.2 procedures.

Table 1-2
Simultaneous Transmission Scenarios

No.	Capable Transmit Configuration	Body
1	GSM/GPRS/EDGE + 2.4 GHz WI-FI	Yes
2	GSM/GPRS/EDGE + 5 GHz WI-FI	Yes
3	GSM/GPRS/EDGE + 2.4 GHz Bluetooth	Yes
4	GSM/GPRS/EDGE + 2.4 GHz WI-FI MIMO	Yes
5	GSM/GPRS/EDGE + 5 GHz WI-FI MIMO	Yes
6	UMTS + 2.4 GHz WI-FI	Yes
7	UMTS + 5 GHz WI-FI	Yes
8	UMTS + 2.4 GHz Bluetooth	Yes
9	UMTS + 2.4 GHz WI-FI MIMO	Yes
10	UMTS + 5 GHz WI-FI MIMO	Yes
11	LTE + 2.4 GHz WI-FI	Yes
12	LTE + 5 GHz WI-FI	Yes
13	LTE + 2.4 GHz Bluetooth	Yes
14	LTE + 2.4 GHz WI-FI MIMO	Yes
15	LTE + 5 GHz WI-FI MIMO	Yes

1. All licensed modes share the same antenna path and cannot transmit simultaneously.
2. When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
3. This device supports 2x2 MIMO Tx for WLAN 802.11a/gn/ac. Each WLAN antenna can transmit independently or together when operating with MIMO.

1.6 Miscellaneous SAR Test Considerations

(A) WIFI/BT

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg, SAR is not required for U-NII-1 band according to FCC KDB Publication 248227 D01v02r02.

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 6 of 71

This device supports IEEE 802.11ac with the following features:

- a) Up to 80 MHz Bandwidth only
- b) No aggregate channel configurations
- c) 2 Tx antenna output
- d) 256 QAM is supported
- e) TDWR and Band gap channels are supported

This device supports channel 1-13 for 2.4 GHz WLAN. However, due to the reduced output power for channels 12 and 13, channels 1, 6, and 11 were considered for SAR testing per KDB 248227 D01v02r02.

(B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03r01.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

1.7 Guidance Applied

- FCC KDB Publication 616217 D04v01r02 (SAR for laptop and tablets)
- FCC KDB Publication 941225 D01v03r01, D05v02r04 (2G/3G/4G)
- FCC KDB Publication 248227 D01v02r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v06 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)
- October 2013 TCB Workshop Notes (GPRS Testing Considerations)

1.8 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. Power level was configured for tested via software only available to the manufacturer (end user cannot control power level) per KDB 616217.

	Maximum Power Serial Number	Reduced Power Serial Number
GSM/GPRS/EDGE 850	09999	09999
GSM/GPRS/EDGE 1900	09999	09999
UMTS 850	09999	09999
UMTS 1750	09999	05260
UMTS 1900	09999	09999
LTE Band 17	09999	09999
LTE Band 5 (Cell)	05286	05286
LTE Band 4 (AWS)	05260	05260
LTE Band 2 (PCS)	14379	09999
2.4 GHz WLAN	05260	-
5 GHz WLAN	05211	-
Bluetooth	05260	-

FCC ID: A3LSMT825	 SAR EVALUATION REPORT 	Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet
		Page 7 of 71

2 LTE INFORMATION

LTE Information			
FCC ID	A3LSMT825		
Form Factor	Portable Tablet		
Frequency Range of each LTE transmission band	LTE Band 17 (706.5 - 713.5 MHz)		
	LTE Band 5 (Cell) (824.7 - 848.3 MHz)		
	LTE Band 4 (AWS) (1710.7 - 1754.3 MHz)		
	LTE Band 2 (PCS) (1850.7 - 1909.3 MHz)		
Channel Bandwidths	LTE Band 17: 5 MHz, 10 MHz		
	LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz		
	LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz		
	LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz		
Channel Numbers and Frequencies (MHz)	Low	Mid	High
LTE Band 17: 5 MHz	706.5 (23755)	710 (23790)	713.5 (23825)
LTE Band 17: 10 MHz	709 (23780)	710 (23790)	711 (23800)
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)	836.5 (20525)	848.3 (20643)
LTE Band 5 (Cell): 3 MHz	825.5 (20415)	836.5 (20525)	847.5 (20635)
LTE Band 5 (Cell): 5 MHz	826.5 (20425)	836.5 (20525)	846.5 (20625)
LTE Band 5 (Cell): 10 MHz	829 (20450)	836.5 (20525)	844 (20600)
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)	1732.5 (20175)	1754.3 (20393)
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)	1732.5 (20175)	1753.5 (20385)
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)	1732.5 (20175)	1752.5 (20375)
LTE Band 4 (AWS): 10 MHz	1715 (20000)	1732.5 (20175)	1750 (20350)
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)	1732.5 (20175)	1747.5 (20325)
LTE Band 4 (AWS): 20 MHz	1720 (20050)	1732.5 (20175)	1745 (20300)
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)	1880 (18900)	1909.3 (19193)
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)	1880 (18900)	1908.5 (19185)
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)	1880 (18900)	1907.5 (19175)
LTE Band 2 (PCS): 10 MHz	1855 (18650)	1880 (18900)	1905 (19150)
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)	1880 (18900)	1902.5 (19125)
LTE Band 2 (PCS): 20 MHz	1860 (18700)	1880 (18900)	1900 (19100)
UE Category	4		
Modulations Supported in UL	QPSK, 16QAM		
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3~6.2.5? (manufacturer attestation to be provided)	YES		
A-MPR (Additional MPR) disabled for SAR Testing?	YES		
LTE Release 10 Additional Information	This device does not support full CA features on 3GPP Release 10. All uplink communications are identical to the Release 8 Specifications. The following LTE Release 10 Features are not supported: Carrier Aggregation, Relay, HetNet, Enhanced MIMO, eICIC, WIFI Offloading, MDH, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.		

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 8 of 71

3 INTRODUCTION

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

Equation 3-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 9 of 71

4 DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 4-1
Sample SAR Area
Scan

Table 4-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{\text{zoomTV}}, \Delta y_{\text{zoom}}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
				$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	
≤2 GHz	≤15	≤8	≤5	≤4	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥30
2-3 GHz	≤12	≤5	≤5	≤4	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥30
3-4 GHz	≤12	≤5	≤4	≤3	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥28
4-5 GHz	≤10	≤4	≤3	≤2.5	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥25
5-6 GHz	≤10	≤4	≤2	≤2	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥22

*Also compliant to IEEE 1528-2013 Table 6

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 10 of 71

5 TEST CONFIGURATION POSITIONS

5.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

5.2 SAR Testing for Tablet per KDB Publication 616217 D04v01r02

Per FCC KDB Publication 616217 D04v01r02, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR Exclusion Threshold in KDB 447498 D01v06 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

5.3 Proximity Sensor Considerations

This device uses a power reduction mechanism to reduce output powers in certain use conditions when the device is used close the user's body.

When the device's antenna is within a certain distance of the user, the sensor activates and reduces the maximum allowed output power. However, the sensor is not active when the device is moved beyond the sensor triggering distance and the maximum output power is no longer limited. Therefore, additional evaluation is needed in the vicinity of the triggering distance to ensure SAR is compliant when the device is allowed to operate at a non-reduced output power level. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device at these additional test positions. Sensor triggering distance summary data is included in Appendix G.

The sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the sensor entirely covers the antennas.

FCC ID: A3LSMT825	 SAR EVALUATION REPORT 	Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet
		Page 11 of 71

6 RF EXPOSURE LIMITS

6.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 6-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: A3LSMT825	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet	Page 12 of 71

7 FCC MEASUREMENT PROCEDURES

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

7.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

7.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03r01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is ≤ 1.2 W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

7.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

7.4 SAR Measurement Conditions for UMTS

7.4.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

FCC ID: A3LSMT825	 SAR EVALUATION REPORT 	Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet
		Page 13 of 71

7.4.2 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all “1s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH_n configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH_n, for the highest reported SAR configuration in 12.2 kbps RMC.

7.4.3 SAR Measurements with Rel 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

7.4.4 SAR Measurements with Rel 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

7.4.5 SAR Measurement Conditions for DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

7.5 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r04 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

7.5.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

7.5.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 14 of 71

7.5.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

7.5.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r04:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to $\frac{1}{2}$ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

7.5.5 Downlink Only Carrier Aggregation

Conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in accordance to KDB Publication 941225 D05Av01r02. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. For every supported combination of downlink only carrier aggregation, additional conducted output powers are measured with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band. Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for carrier aggregation configurations when the average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive.

7.6 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 15 of 71

7.6.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

7.6.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg.

7.6.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. Each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

7.6.4 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

7.6.5 OFDM Transmission Mode and SAR Test Channel Selection

When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e.,

FCC ID: A3LSMT825	 SAR EVALUATION REPORT 	Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet
		Page 16 of 71

802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

7.6.6 Initial Test Configuration Procedure

For OFDM, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order IEEE 802.11 mode. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 7.6.5).

7.6.7 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required.

7.6.8 MIMO SAR considerations

Per KDB Publication 248227 D01v02r02, the simultaneous SAR provisions in KDB Publication 447498 D01v06 should be applied to determine simultaneous transmission SAR test exclusion for WIFI MIMO. If the sum of 1g single transmission chain SAR measurements is < 1.6 W/kg, no additional SAR measurements for MIMO are required. Alternatively, SAR for MIMO can be measured with all antennas transmitting simultaneously at the specified maximum output power of MIMO operation.

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 17 of 71

8 RF CONDUCTED POWERS

8.1 GSM Conducted Powers

Table 8-1
Maximum Conducted Powers

Maximum Burst-Averaged Output Power										
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	31.94	31.93	30.74	29.04	27.38	26.19	24.60	22.50	22.10
	190	32.07	32.06	30.88	29.23	27.53	26.35	24.80	22.72	22.36
	251	32.07	32.09	30.87	29.26	27.57	26.28	24.77	22.66	22.32
GSM 1900	512	29.41	29.30	28.15	25.93	24.31	25.07	23.90	22.37	20.99
	661	28.67	28.55	27.47	25.43	23.66	24.50	23.28	21.70	20.20
	810	29.46	29.40	28.29	26.00	24.37	25.14	23.90	22.35	20.98
Calculated Maximum Frame-Averaged Output Power										
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	22.91	22.90	24.72	24.78	24.37	17.16	18.58	18.24	19.09
	190	23.04	23.03	24.86	24.97	24.52	17.32	18.78	18.46	19.35
	251	23.04	23.06	24.85	25.00	24.56	17.25	18.75	18.40	19.31
GSM 1900	512	20.38	20.27	22.13	21.67	21.30	16.04	17.88	18.11	17.98
	661	19.64	19.52	21.45	21.17	20.65	15.47	17.26	17.44	17.19
	810	20.43	20.37	22.27	21.74	21.36	16.11	17.88	18.09	17.97
GSM 850	Frame	23.97	23.97	24.98	24.74	24.49	17.47	19.48	19.24	19.49
GSM 1900	Avg.Targets:	20.97	20.97	22.48	22.24	21.49	16.97	18.48	18.74	18.49

FCC ID: A3LSMT825	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet	Page 18 of 71

Table 8-2
Reduced Conducted Powers

Maximum Burst-Averaged Output Power										
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	23.65	23.70	19.80	18.30	16.25	22.76	20.34	18.40	16.40
	190	23.85	23.88	20.15	18.52	16.48	22.82	20.50	18.71	16.62
	251	23.88	23.90	19.97	18.50	16.39	22.80	20.40	18.69	16.60
GSM 1900	512	21.62	21.70	20.10	18.38	18.20	18.31	16.74	15.36	15.21
	661	20.92	21.01	19.40	17.73	17.57	17.53	16.13	14.77	14.62
	810	21.68	21.77	20.12	18.37	18.34	18.29	16.87	15.37	15.38

Calculated Maximum Frame-Averaged Output Power										
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	14.62	14.67	13.78	14.04	13.24	13.73	14.32	14.14	13.39
	190	14.82	14.85	14.13	14.26	13.47	13.79	14.48	14.45	13.61
	251	14.85	14.87	13.95	14.24	13.38	13.77	14.38	14.43	13.59
GSM 1900	512	12.59	12.67	14.08	14.12	15.19	9.28	10.72	11.10	12.20
	661	11.89	11.98	13.38	13.47	14.56	8.50	10.11	10.51	11.61
	810	12.65	12.74	14.10	14.11	15.33	9.26	10.85	11.11	12.37
GSM 850	Frame	15.47	15.47	13.98	15.24	13.49	13.47	13.98	14.24	13.49
GSM 1900	Avg.Targets:	12.47	12.47	13.98	13.74	14.99	8.97	10.48	10.74	11.99

Note:

- Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
- EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

GSM Class: B
GPRS Multislot class: 33 (Max 4 Tx uplink slots)
EDGE Multislot class: 33 (Max 4 Tx uplink slots)
DTM Multislot Class: N/A




Figure 8-1
Power Measurement Setup

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 19 of 71

8.2 UMTS Conducted Powers

Table 8-3
Maximum Conducted Powers

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	22.84	22.76	22.85	23.26	22.92	22.75	23.05	22.30	23.14	-
99		12.2 kbps AMR	22.80	22.75	22.87	23.22	22.87	22.70	22.76	22.28	22.82	-
6	HSDPA	Subtest 1	21.88	21.85	22.03	22.35	22.03	21.86	22.02	21.28	22.09	0
6		Subtest 2	21.92	21.89	21.99	22.32	22.05	21.83	22.06	21.24	22.13	0
6		Subtest 3	21.48	21.36	21.49	21.86	21.56	21.40	21.53	20.82	21.64	0.5
6		Subtest 4	21.44	21.39	21.52	21.84	21.55	21.39	21.57	20.83	21.61	0.5
6	HSUPA	Subtest 1	21.67	21.87	21.66	22.38	21.75	21.86	22.05	21.34	22.16	0
6		Subtest 2	19.97	19.91	20.02	20.41	20.08	19.93	20.08	19.37	20.14	2
6		Subtest 3	20.89	20.91	21.01	21.37	21.06	20.89	21.07	20.33	21.16	1
6		Subtest 4	19.93	19.89	20.02	20.38	20.06	19.87	20.08	19.34	20.13	2
6		Subtest 5	21.89	21.91	22.04	22.41	22.08	21.91	22.08	21.33	22.12	0
8	DC-HSDPA	Subtest 1	22.01	21.85	21.93	22.36	22.06	21.82	22.09	21.31	22.09	0
8		Subtest 2	21.96	21.86	21.94	22.34	22.03	21.84	22.07	21.30	22.13	0
8		Subtest 3	21.44	21.38	21.43	21.89	21.56	21.35	21.58	20.82	21.62	0.5
8		Subtest 4	21.48	21.35	21.46	21.84	21.54	21.37	21.54	20.81	21.61	0.5

Table 8-4
Reduced Conducted Powers

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	16.02	16.01	16.03	13.25	12.92	12.73	13.22	12.51	13.31	-
99		12.2 kbps AMR	16.00	15.96	16.02	13.23	12.93	12.68	13.21	12.48	13.30	-
6	HSDPA	Subtest 1	15.07	15.04	15.09	12.29	12.01	11.83	12.18	11.51	12.28	0
6		Subtest 2	15.09	15.07	15.12	12.30	11.99	11.84	12.22	11.50	12.29	0
6		Subtest 3	14.63	14.58	14.62	11.81	11.54	11.34	11.73	11.04	11.77	0.5
6		Subtest 4	14.61	14.57	14.64	11.80	11.57	11.34	11.74	11.03	11.79	0.5
6		Subtest 5	15.13	15.07	14.85	12.32	12.04	11.85	12.25	11.53	11.77	0
6	HSUPA	Subtest 1	13.03	13.09	13.15	10.32	10.02	9.82	10.21	9.53	10.29	2
6		Subtest 2	14.01	14.09	14.13	11.31	11.03	10.84	11.19	10.52	11.29	1
6		Subtest 3	13.14	13.08	13.12	10.31	10.01	9.84	10.21	9.51	10.07	2
6		Subtest 4	15.02	15.09	15.14	12.04	11.73	11.56	11.92	11.50	12.02	0
6		Subtest 5	15.07	15.04	15.12	12.27	11.84	11.81	12.19	11.51	12.27	0
8	DC-HSDPA	Subtest 1	15.09	15.07	15.08	12.31	12.01	11.83	12.18	11.50	12.24	0
8		Subtest 2	14.59	14.55	14.62	11.82	11.53	11.36	11.72	11.01	11.79	0.5
8		Subtest 3	14.60	14.57	14.63	11.85	11.54	11.33	11.71	11.02	11.78	0.5
8		Subtest 4	14.60	14.57	14.63	11.85	11.54	11.33	11.71	11.02	11.78	0.5

DC-HSDPA considerations

- 3GPP Specification 34.121-1 Release 8 Ver 8.10.0 was used for DC-HSDPA guidance
- H-Set 12 (QPSK) was confirmed to be used during DC-HSDPA measurements
- The DUT supports UE category 24 for HSDPA

It is expected by the manufacturer that MPR for some HSPA subtests may be up to 1 dB more than specified by 3GPP, but also as low as 0 dB according to the chipset implementation in this model.



Figure 8-2
Power Measurement Setup

FCC ID: A3LSMT825	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet	Page 20 of 71

8.3 LTE Conducted Powers

8.3.1 LTE Band 17

Table 8-5
LTE Band 17 Maximum Conducted Powers - 10 MHz Bandwidth

LTE Band 17 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23790 (710.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	22.30	0	0
	1	25	22.34		0
	1	49	22.20		0
	25	0	21.43	0-1	1
	25	12	21.44		1
	25	25	21.40		1
	50	0	21.38		1
16QAM	1	0	21.36	0-1	1
	1	25	21.37		1
	1	49	21.27		1
	25	0	20.37	0-2	2
	25	12	20.37		2
	25	25	20.33		2
	50	0	20.35		2

Note: LTE Band 17 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 8-6
LTE Band 17 Maximum Conducted Powers - 5 MHz Bandwidth

LTE Band 17 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23790 (710.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	22.55	0	0
	1	12	22.51		0
	1	24	22.46		0
	12	0	21.75	0-1	1
	12	6	21.68		1
	12	13	21.63		1
	25	0	21.66		1
16QAM	1	0	22.02	0-1	1
	1	12	21.97		1
	1	24	21.92		1
	12	0	20.76	0-2	2
	12	6	20.75		2
	12	13	20.66		2
	25	0	20.68		2

Note: LTE Band 17 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 21 of 71

Table 8-7
LTE Band 17 Reduced Conducted Powers - 10 MHz Bandwidth

LTE Band 17 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23790 (710.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	16.06	0	0
	1	25	16.21		0
	1	49	16.00		0
	25	0	16.20	0-1	0
	25	12	16.19		0
	25	25	16.17		0
	50	0	16.18		0
16QAM	1	0	16.35	0-1	0
	1	25	16.41		0
	1	49	16.27		0
	25	0	16.25	0-2	0
	25	12	16.24		0
	25	25	16.22		0
	50	0	16.18		0

Note: LTE Band 17 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 8-8
LTE Band 17 Reduced Conducted Powers - 5 MHz Bandwidth

LTE Band 17 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23790 (710.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	16.66	0	0
	1	12	16.61		0
	1	24	16.57		0
	12	0	16.81	0-1	0
	12	6	16.75		0
	12	13	16.70		0
	25	0	16.69		0
16QAM	1	0	16.53	0-1	0
	1	12	16.59		0
	1	24	16.65		0
	12	0	16.80	0-2	0
	12	6	16.79		0
	12	13	16.77		0
	25	0	16.68		0

Note: LTE Band 17 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 22 of 71

8.3.2 LTE Band 5 (Cell)

Table 8-9
LTE Band 5 (Cell) Maximum Conducted Powers - 10 MHz Bandwidth

LTE Band 5 (Cell) 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20525 (836.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	22.94	0	0
	1	25	22.99		0
	1	49	22.87		0
	25	0	22.10	0-1	1
	25	12	22.11		1
	25	25	22.07		1
	50	0	22.08		1
16QAM	1	0	22.06	0-1	1
	1	25	22.08		1
	1	49	22.04		1
	25	0	21.08	0-2	2
	25	12	21.07		2
	25	25	21.05		2
	50	0	21.00		2

Note: LTE Band 5 (Cell) at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 8-10
LTE Band 5 (Cell) Maximum Conducted Powers - 5 MHz Bandwidth

LTE Band 5 (Cell) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20425 (826.5 MHz)	20525 (836.5 MHz)	20625 (846.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.86	22.91	22.79	0	0
	1	12	22.94	22.99	22.76		0
	1	24	22.93	22.84	22.62		0
	12	0	21.92	22.02	21.88	0-1	1
	12	6	21.97	22.06	21.92		1
	12	13	21.92	22.01	21.91		1
	25	0	21.91	21.98	21.89		1
16QAM	1	0	22.24	22.26	22.24	0-1	1
	1	12	22.34	22.29	22.21		1
	1	24	22.27	22.19	22.12		1
	12	0	20.98	20.98	20.93	0-2	2
	12	6	20.97	21.04	20.97		2
	12	13	20.95	20.99	20.92		2
	25	0	20.86	21.01	20.92		2

FCC ID: A3LSMT825	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet	Page 23 of 71

Table 8-11
LTE Band 5 (Cell) Maximum Conducted Powers - 3 MHz Bandwidth

LTE Band 5 (Cell) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20415 (825.5 MHz)	20525 (836.5 MHz)	20635 (847.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.67	22.84	22.79	0	0
	1	7	22.82	22.95	22.89		0
	1	14	22.65	22.80	22.72		0
	8	0	21.91	21.91	21.84	0-1	1
	8	4	21.93	21.99	21.92		1
	8	7	21.86	21.89	21.82		1
	15	0	21.87	21.97	21.89	1	
16QAM	1	0	21.95	22.14	21.96	0-1	1
	1	7	21.97	22.30	22.05		1
	1	14	21.86	22.16	21.79		1
	8	0	20.90	20.82	20.70	0-2	2
	8	4	20.94	20.92	20.78		2
	8	7	20.92	20.84	20.68		2
	15	0	20.81	20.98	20.79		2

Table 8-12
LTE Band 5 (Cell) Maximum Conducted Powers -1.4 MHz Bandwidth

LTE Band 5 (Cell) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20407 (824.7 MHz)	20525 (836.5 MHz)	20643 (848.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.61	22.97	22.68	0	0
	1	2	22.69	23.02	22.75		0
	1	5	22.64	22.97	22.67		0
	3	0	22.78	22.89	22.74		0
	3	2	22.83	22.93	22.81		0
	3	3	22.77	22.83	22.77		0
	6	0	21.81	21.88	21.73	0-1	1
16QAM	1	0	21.89	21.86	21.83	0-1	1
	1	2	21.98	21.87	21.86		1
	1	5	21.91	21.76	21.79		1
	3	0	21.77	21.91	21.95		1
	3	2	21.82	21.93	21.97		1
	3	3	21.75	21.84	21.92		1
	6	0	20.77	20.96	20.77	0-2	2

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 24 of 71

Table 8-13
LTE Band 5 (Cell) Reduced Conducted Powers - 10 MHz Bandwidth

LTE Band 5 (Cell) 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20525 (836.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	14.84	0	0
	1	25	14.92		0
	1	49	14.82		0
	25	0	15.02	0-1	0
	25	12	15.08		0
	25	25	14.96		0
	50	0	15.07		0
16QAM	1	0	15.39	0-1	0
	1	25	15.42		0
	1	49	15.37		0
	25	0	15.03	0-2	0
	25	12	15.12		0
	25	25	14.96		0
	50	0	15.07		0

Note: LTE Band 5 (Cell) at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 8-14
LTE Band 5 (Cell) Reduced Conducted Powers - 5 MHz Bandwidth

LTE Band 5 (Cell) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20425 (826.5 MHz)	20525 (836.5 MHz)	20625 (846.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.82	14.94	14.99	0	0
	1	12	14.77	14.99	14.92		0
	1	24	14.80	14.91	14.87		0
	12	0	14.93	15.05	14.90	0-1	0
	12	6	14.98	15.07	14.96		0
	12	13	14.96	15.04	14.93		0
	25	0	14.94	15.03	14.91		0
16QAM	1	0	15.00	15.22	15.29	0-1	0
	1	12	15.04	15.21	15.23		0
	1	24	15.00	15.14	15.17		0
	12	0	14.96	15.03	14.96	0-2	0
	12	6	15.03	15.09	14.98		0
	12	13	14.97	15.03	14.94		0
	25	0	14.97	15.06	14.90		0

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 25 of 71

Table 8-15
LTE Band 5 (Cell) Reduced Conducted Powers - 3 MHz Bandwidth

LTE Band 5 (Cell) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20415 (825.5 MHz)	20525 (836.5 MHz)	20635 (847.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.83	14.93	14.83	0	0
	1	7	14.95	15.03	14.91		0
	1	14	14.82	14.88	14.70		0
	8	0	14.93	14.96	14.89	0-1	0
	8	4	14.97	15.05	14.95		0
	8	7	14.93	14.97	14.86		0
	15	0	14.96	15.00	14.88		0
16QAM	1	0	14.99	15.40	15.33	0-1	0
	1	7	15.11	15.42	15.40		0
	1	14	14.91	15.41	15.26		0
	8	0	14.89	15.07	14.98	0-2	0
	8	4	14.93	15.12	15.04		0
	8	7	14.91	15.06	14.98		0
	15	0	14.97	15.07	15.01		0

Table 8-16
LTE Band 5 (Cell) Reduced Conducted Powers -1.4 MHz Bandwidth

LTE Band 5 (Cell) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20407 (824.7 MHz)	20525 (836.5 MHz)	20643 (848.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.77	14.98	14.64	0	0
	1	2	14.82	15.00	14.68		0
	1	5	14.78	14.97	14.61		0
	3	0	14.80	14.93	14.79		0
	3	2	14.84	14.99	14.80		0
	3	3	14.79	14.91	14.76		0
	6	0	14.82	14.94	14.82	0-1	0
16QAM	1	0	14.90	14.88	14.99	0-1	0
	1	2	14.99	14.92	15.03		0
	1	5	14.89	14.82	14.98		0
	3	0	14.83	15.03	14.76		0
	3	2	14.88	15.02	14.80		0
	3	3	14.85	15.00	14.72		0
	6	0	14.95	15.12	14.89	0-2	0

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 26 of 71

8.3.3 LTE Band 4 (AWS)

Table 8-17
LTE Band 4 (AWS) Maximum Conducted Powers - 20 MHz Bandwidth

LTE Band 4 (AWS) 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20175 (1732.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	23.65	0	0
	1	50	22.72		0
	1	99	22.78		0
	50	0	22.20	0-1	1
	50	25	21.87		1
	50	50	21.82		1
	100	0	21.99		1
16QAM	1	0	22.70	0-1	1
	1	50	21.79		1
	1	99	21.91		1
	50	0	21.13	0-2	2
	50	25	20.84		2
	50	50	20.75		2
	100	0	20.95		2

Note: LTE Band 4 (AWS) at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 8-18
LTE Band 4 (AWS) Maximum Conducted Powers - 15 MHz Bandwidth

LTE Band 4 (AWS) 15 MHzBandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20025 (1717.5 MHz)	20175 (1732.5 MHz)	20325 (1747.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.65	23.45	23.25	0	0
	1	36	22.97	22.95	22.63		0
	1	74	23.07	22.93	22.58		0
	36	0	22.38	22.31	21.96	0-1	1
	36	18	22.16	22.01	21.75		1
	36	37	22.01	21.90	21.65		1
	75	0	22.20	22.06	21.79		1
16QAM	1	0	22.87	22.71	22.56	0-1	1
	1	36	22.32	21.99	21.84		1
	1	74	22.33	22.05	21.84		1
	36	0	21.33	21.20	20.86	0-2	2
	36	18	21.15	20.95	20.70		2
	36	37	20.98	20.82	20.57		2
	75	0	21.31	21.00	20.76		2

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 27 of 71

Table 8-19
LTE Band 4 (AWS) Maximum Conducted Powers - 10 MHz Bandwidth

LTE Band 4 (AWS) 10 MHzBandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20000 (1715.0 MHz)	20175 (1732.5 MHz)	20350 (1750.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.58	23.44	23.15	0	0
	1	25	23.39	23.08	22.83		0
	1	49	23.26	22.99	22.78		0
	25	0	22.69	22.32	22.06	0-1	1
	25	12	22.55	22.20	21.97		1
	25	25	22.43	22.09	21.99		1
	50	0	22.62	22.20	21.96		1
16QAM	1	0	22.76	22.52	22.35	0-1	1
	1	25	22.59	22.31	22.05		1
	1	49	22.51	22.21	22.02		1
	25	0	21.58	21.27	21.00	0-2	2
	25	12	21.49	21.14	20.93		2
	25	25	21.41	21.05	20.82		2
	50	0	21.55	21.13	20.93		2

Table 8-20
LTE Band 4 (AWS) Maximum Conducted Powers - 5 MHz Bandwidth

LTE Band 4 (AWS) 5 MHzBandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19975 (1712.5 MHz)	20175 (1732.5 MHz)	20375 (1752.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.56	23.35	23.05	0	0
	1	12	23.46	23.13	22.89		0
	1	24	23.38	23.09	22.84		0
	12	0	22.65	22.29	22.02	0-1	1
	12	6	22.57	22.23	21.98		1
	12	13	22.53	22.19	21.96		1
	25	0	22.52	22.19	21.98		1
16QAM	1	0	22.78	22.59	22.21	0-1	1
	1	12	22.67	22.31	22.13		1
	1	24	22.62	22.29	22.01		1
	12	0	21.60	21.25	20.99	0-2	2
	12	6	21.58	21.28	20.99		2
	12	13	21.53	21.19	20.91		2
	25	0	21.51	21.17	20.93		2

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 28 of 71

Table 8-21
LTE Band 4 (AWS) Maximum Conducted Powers - 3 MHz Bandwidth

LTE Band 4 (AWS) 3 MHzBandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19965 (1711.5 MHz)	20175 (1732.5 MHz)	20385 (1753.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.59	23.15	22.92	0	0
	1	7	23.66	23.17	22.95		0
	1	14	23.40	23.08	22.86		0
	8	0	22.53	22.19	21.95	0-1	1
	8	4	22.65	22.21	21.99		1
	8	7	22.45	22.16	21.98		1
	15	0	22.53	22.17	22.05		1
16QAM	1	0	22.70	22.31	22.15	0-1	1
	1	7	22.81	22.41	22.20		1
	1	14	22.60	22.28	22.16		1
	8	0	21.54	21.22	21.08	0-2	2
	8	4	21.62	21.21	21.08		2
	8	7	21.52	21.21	21.03		2
	15	0	21.55	21.13	20.96		2

Table 8-22
LTE Band 4 (AWS) Maximum Conducted Powers -1.4 MHz Bandwidth

LTE Band 4 (AWS) 1.4 MHzBandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19957 (1710.7 MHz)	20175 (1732.5 MHz)	20393 (1754.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.46	23.17	22.87	0	0
	1	2	23.43	23.24	22.89		0
	1	5	23.39	23.11	22.86		0
	3	0	23.53	23.12	22.87		0
	3	2	23.41	23.16	22.91		0
	3	3	23.39	23.09	22.83		0
	6	0	22.54	22.21	21.96	0-1	1
16QAM	1	0	22.76	22.35	22.05	0-1	1
	1	2	22.72	22.42	22.08		1
	1	5	22.61	22.31	22.03		1
	3	0	22.65	22.29	22.05		1
	3	2	22.69	22.29	22.06		1
	3	3	22.66	22.23	22.00		1
	6	0	21.61	21.30	21.01	0-2	2

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 29 of 71

Table 8-23
LTE Band 4 (AWS) Reduced Conducted Powers - 20 MHz Bandwidth

LTE Band 4 (AWS) 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20175 (1732.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	13.20	0	0
	1	50	12.40		0
	1	99	12.42		0
	50	0	12.80	0-1	0
	50	25	12.46		0
	50	50	12.44		0
	100	0	12.61		0
16QAM	1	0	13.30	0-1	0
	1	50	12.61		0
	1	99	12.65		0
	50	0	12.78	0-2	0
	50	25	12.47		0
	50	50	12.39		0
	100	0	12.60		0

Note: LTE Band 4 (AWS) at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 8-24
LTE Band 4 (AWS) Reduced Conducted Powers - 15 MHz Bandwidth

LTE Band 4 (AWS) 15 MHzBandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20025 (1717.5 MHz)	20175 (1732.5 MHz)	20325 (1747.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	13.16	13.12	12.93	0	0
	1	36	12.64	12.54	12.27		0
	1	74	12.71	12.55	12.25		0
	36	0	13.09	12.94	12.65	0-1	0
	36	18	12.86	12.71	12.45		0
	36	37	12.72	12.61	12.34		0
	75	0	12.91	12.75	12.45		0
16QAM	1	0	13.48	13.40	13.21	0-1	0
	1	36	12.98	12.83	12.61		0
	1	74	13.00	12.83	12.56		0
	36	0	13.01	12.98	12.64	0-2	0
	36	18	12.83	12.73	12.47		0
	36	37	12.71	12.60	12.36		0
	75	0	12.89	12.74	12.51		0

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 30 of 71

Table 8-25
LTE Band 4 (AWS) Reduced Conducted Powers - 10 MHz Bandwidth

LTE Band 4 (AWS) 10 MHzBandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20000 (1715.0 MHz)	20175 (1732.5 MHz)	20350 (1750.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	13.12	12.78	12.59	0	0
	1	25	12.79	12.53	12.31		0
	1	49	12.72	12.46	12.26		0
	25	0	13.12	12.79	12.54	0-1	0
	25	12	12.98	12.65	12.46		0
	25	25	12.88	12.61	12.36		0
	50	0	13.01	12.65	12.48		0
16QAM	1	0	13.29	13.00	12.78	0-1	0
	1	25	13.13	12.75	12.52		0
	1	49	12.94	12.66	12.54		0
	25	0	13.04	12.78	12.50	0-2	0
	25	12	12.92	12.65	12.43		0
	25	25	12.85	12.60	12.33		0
	50	0	13.00	12.66	12.48		0

Table 8-26
LTE Band 4 (AWS) Reduced Conducted Powers - 5 MHz Bandwidth

LTE Band 4 (AWS) 5 MHzBandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19975 (1712.5 MHz)	20175 (1732.5 MHz)	20375 (1752.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	12.99	12.66	12.38	0	0
	1	12	12.83	12.45	12.30		0
	1	24	12.74	12.43	12.23		0
	12	0	12.96	12.61	12.38	0-1	0
	12	6	12.94	12.65	12.39		0
	12	13	12.89	12.58	12.32		0
	25	0	12.93	12.61	12.35		0
16QAM	1	0	13.18	12.89	12.59	0-1	0
	1	12	13.04	12.69	12.52		0
	1	24	13.02	12.75	12.35		0
	12	0	13.00	12.62	12.40	0-2	0
	12	6	13.01	12.63	12.43		0
	12	13	12.89	12.58	12.32		0
	25	0	12.90	12.60	12.33		0

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 31 of 71

Table 8-27
LTE Band 4 (AWS) Reduced Conducted Powers - 3 MHz Bandwidth

LTE Band 4 (AWS) 3 MHzBandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19965 (1711.5 MHz)	20175 (1732.5 MHz)	20385 (1753.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	12.87	12.50	12.32	0	0
	1	7	12.95	12.58	12.46		0
	1	14	12.78	12.42	12.33		0
	8	0	12.86	12.56	12.37	0-1	0
	8	4	12.96	12.58	12.38		0
	8	7	12.82	12.55	12.31		0
	15	0	12.92	12.59	12.29		0
16QAM	1	0	12.87	12.70	12.28	0-1	0
	1	7	12.90	12.76	12.26		0
	1	14	12.78	12.62	12.23		0
	8	0	12.86	12.66	12.38	0-2	0
	8	4	12.96	12.65	12.36		0
	8	7	12.83	12.63	12.30		0
	15	0	12.91	12.58	12.31		0

Table 8-28
LTE Band 4 (AWS) Reduced Conducted Powers -1.4 MHz Bandwidth

LTE Band 4 (AWS) 1.4 MHzBandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19957 (1710.7 MHz)	20175 (1732.5 MHz)	20393 (1754.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	12.78	12.40	12.11	0	0
	1	2	12.72	12.42	12.18		0
	1	5	12.64	12.35	12.12		0
	3	0	12.81	12.36	12.20		0
	3	2	12.72	12.38	12.23		0
	3	3	12.71	12.40	12.13		0
	6	0	12.78	12.49	12.26	0-1	0
16QAM	1	0	13.00	12.39	12.30	0-1	0
	1	2	12.93	12.38	12.41		0
	1	5	12.92	12.34	12.40		0
	3	0	12.89	12.43	12.30		0
	3	2	12.88	12.40	12.36		0
	3	3	12.84	12.41	12.29		0
	6	0	12.87	12.49	12.34	0-2	0

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 32 of 71

8.3.4

LTE Band 2 (PCS)

Table 8-29

LTE Band 2 (PCS) Maximum Conducted Powers - 20 MHz Bandwidth

LTE Band 2 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18700 (1860.0 MHz)	18900 (1880.0 MHz)	19100 (1900.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.80	23.23	23.47	0	0
	1	50	22.80	22.33	23.04		0
	1	99	22.81	22.70	23.45		0
	50	0	22.25	21.75	22.14	0-1	1
	50	25	21.84	21.34	22.08		1
	50	50	21.81	21.50	22.20		1
	100	0	21.99	21.51	22.24		1
16QAM	1	0	22.80	22.29	22.49	0-1	1
	1	50	21.86	21.30	21.98		1
	1	99	21.84	21.72	22.41		1
	50	0	21.20	20.71	21.08	0-2	2
	50	25	20.85	20.33	21.03		2
	50	50	20.80	20.45	21.15		2
	100	0	20.95	20.47	21.17		2

Table 8-30

LTE Band 2 (PCS) Maximum Conducted Powers - 15 MHz Bandwidth

LTE Band 2 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18675 (1857.5 MHz)	18900 (1880.0 MHz)	19125 (1902.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.77	23.19	23.70	0	0
	1	36	22.94	22.46	23.19		0
	1	74	22.77	22.82	23.66		0
	36	0	22.41	21.86	22.39	0-1	1
	36	18	22.11	21.55	22.25		1
	36	37	21.95	21.54	22.30		1
	75	0	22.11	21.56	22.29		1
16QAM	1	0	22.74	22.45	22.92	0-1	1
	1	36	22.13	21.93	22.53		1
	1	74	22.00	22.16	22.70		1
	36	0	21.34	20.85	21.34	0-2	2
	36	18	21.15	20.60	21.24		2
	36	37	20.93	20.57	21.32		2
	75	0	21.13	20.59	21.23		2

FCC ID: A3LSMT825				Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 33 of 71

Table 8-31
LTE Band 2 (PCS) Maximum Conducted Powers - 10 MHz Bandwidth

LTE Band 2 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18650 (1855.0 MHz)	18900 (1880.0 MHz)	19150 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.33	22.68	23.29	0	0
	1	25	22.95	22.31	23.22		0
	1	49	22.80	22.45	23.34		0
	25	0	22.30	21.62	22.55	0-1	1
	25	12	22.05	21.48	22.46		1
	25	25	22.02	21.50	22.50		1
	50	0	22.08	21.46	22.47		1
16QAM	1	0	22.52	22.23	22.55	0-1	1
	1	25	22.07	21.87	22.44		1
	1	49	21.88	22.01	22.53		1
	25	0	21.28	20.64	21.54	0-2	2
	25	12	21.10	20.50	21.45		2
	25	25	21.03	20.53	21.46		2
	50	0	21.05	20.48	21.43		2

Table 8-32
LTE Band 2 (PCS) Maximum Conducted Powers - 5 MHz Bandwidth

LTE Band 2 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18625 (1852.5 MHz)	18900 (1880.0 MHz)	19175 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.21	22.55	23.36	0	0
	1	12	23.13	22.34	23.41		0
	1	24	22.95	22.39	23.44		0
	12	0	22.19	21.48	22.44	0-1	1
	12	6	22.16	21.43	22.49		1
	12	13	22.07	21.47	22.43		1
	25	0	22.14	21.45	22.45		1
16QAM	1	0	22.56	21.71	22.65	0-1	1
	1	12	22.44	21.49	22.66		1
	1	24	22.28	21.59	22.60		1
	12	0	21.12	20.50	21.42	0-2	2
	12	6	21.11	20.48	21.48		2
	12	13	21.08	20.49	21.38		2
	25	0	21.06	20.45	21.44		2

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 34 of 71

Table 8-33
LTE Band 2 (PCS) Maximum Conducted Powers - 3 MHz Bandwidth

LTE Band 2 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18615 (1851.5 MHz)	18900 (1880.0 MHz)	19185 (1908.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.05	22.36	23.32	0	0
	1	7	23.10	22.43	23.34		0
	1	14	22.98	22.30	23.23		0
	8	0	22.12	21.44	22.48	0-1	1
	8	4	22.12	21.45	22.46		1
	8	7	22.08	21.36	22.39		1
	15	0	22.13	21.40	22.45		1
16QAM	1	0	22.21	21.86	22.59	0-1	1
	1	7	22.30	21.92	22.64		1
	1	14	22.07	21.82	22.48		1
	8	0	21.05	20.50	21.48	0-2	2
	8	4	21.06	20.49	21.48		2
	8	7	21.02	20.46	21.47		2
	15	0	21.08	20.45	21.43		2

Table 8-34
LTE Band 2 (PCS) Maximum Conducted Powers -1.4 MHz Bandwidth

LTE Band 2 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18607 (1850.7 MHz)	18900 (1880.0 MHz)	19193 (1909.3 MHz)		
QPSK	1	0	22.95	22.38	23.13	0	0
	1	2	23.00	22.40	23.28		0
	1	5	22.97	22.39	23.18		0
	3	0	23.00	22.33	23.36		0
	3	2	23.05	22.37	23.40		0
	3	3	22.99	22.28	23.36		0
	6	0	21.98	21.32	22.38	0-1	1
16QAM	1	0	22.06	21.23	22.41	0-1	1
	1	2	22.12	21.29	22.52		1
	1	5	22.05	21.20	22.46		1
	3	0	22.02	21.38	22.29		1
	3	2	22.05	21.42	22.33		1
	3	3	22.03	21.41	22.26		1
	6	0	21.06	20.51	21.46	0-2	2

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 35 of 71

Table 8-35
LTE Band 2 (PCS) Reduced Conducted Powers - 20 MHz Bandwidth

LTE Band 2 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18700 (1860.0 MHz)	18900 (1880.0 MHz)	19100 (1900.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	13.70	13.24	13.32	0	0
	1	50	12.79	12.30	12.87		0
	1	99	12.78	12.58	13.27		0
	50	0	13.27	12.78	13.16	0-1	0
	50	25	12.88	12.37	13.07		0
	50	50	12.78	12.46	13.20		0
	100	0	13.00	12.49	13.26		0
16QAM	1	0	13.75	13.23	13.52	0-1	0
	1	50	12.84	12.34	13.04		0
	1	99	12.78	12.76	13.47		0
	50	0	13.25	12.72	13.14	0-2	0
	50	25	12.88	12.34	13.08		0
	50	50	12.82	12.45	13.16		0
	100	0	12.97	12.49	13.22		0

Table 8-36
LTE Band 2 (PCS) Reduced Conducted Powers - 15 MHz Bandwidth

LTE Band 2 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18675 (1857.5 MHz)	18900 (1880.0 MHz)	19125 (1902.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	13.75	13.27	13.83	0	0
	1	36	13.15	12.71	13.35		0
	1	74	12.93	12.80	13.56		0
	36	0	13.52	12.95	13.46	0-1	0
	36	18	13.23	12.69	13.35		0
	36	37	13.06	12.67	13.37		0
	75	0	13.19	12.68	13.38		0
16QAM	1	0	13.83	13.46	13.82	0-1	0
	1	36	13.33	12.78	13.44		0
	1	74	13.05	13.00	13.62		0
	36	0	13.43	12.94	13.50	0-2	0
	36	18	13.19	12.70	13.37		0
	36	37	13.00	12.67	13.43		0
	75	0	13.25	12.71	13.31		0

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 36 of 71

Table 8-37
LTE Band 2 (PCS) Reduced Conducted Powers - 10 MHz Bandwidth

LTE Band 2 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18650 (1855.0 MHz)	18900 (1880.0 MHz)	19150 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	13.33	12.75	13.35	0	0
	1	25	12.96	12.40	13.21		0
	1	49	12.87	12.53	13.27		0
	25	0	13.26	12.68	13.49	0-1	0
	25	12	13.10	12.51	13.40		0
	25	25	13.01	12.56	13.42		0
	50	0	13.09	12.54	13.44		0
16QAM	1	0	13.45	13.23	13.67	0-1	0
	1	25	13.06	12.85	13.47		0
	1	49	12.96	12.99	13.55		0
	25	0	13.29	12.73	13.51	0-2	0
	25	12	13.10	12.57	13.44		0
	25	25	13.04	12.63	13.47		0
	50	0	13.07	12.54	13.42		0

Table 8-38
LTE Band 2 (PCS) Reduced Conducted Powers - 5 MHz Bandwidth

LTE Band 2 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18625 (1852.5 MHz)	18900 (1880.0 MHz)	19175 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	13.23	12.53	13.41	0	0
	1	12	13.15	12.34	13.43		0
	1	24	13.08	12.41	13.40		0
	12	0	13.20	12.49	13.43	0-1	0
	12	6	13.19	12.46	13.46		0
	12	13	13.13	12.50	13.38		0
	25	0	13.15	12.45	13.42		0
16QAM	1	0	13.55	12.72	13.59	0-1	0
	1	12	13.48	12.55	13.61		0
	1	24	13.34	12.65	13.60		0
	12	0	13.22	12.52	13.40	0-2	0
	12	6	13.19	12.50	13.45		0
	12	13	13.15	12.49	13.38		0
	25	0	13.13	12.48	13.42		0

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 37 of 71

Table 8-39
LTE Band 2 (PCS) Reduced Conducted Powers - 3 MHz Bandwidth

LTE Band 2 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18615 (1851.5 MHz)	18900 (1880.0 MHz)	19185 (1908.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	13.12	12.43	13.31	0	0
	1	7	13.15	12.46	13.40		0
	1	14	13.06	12.36	13.24		0
	8	0	13.16	12.46	13.46	0-1	0
	8	4	13.17	12.45	13.48		0
	8	7	13.13	12.39	13.40		0
	15	0	13.20	12.47	13.44		0
16QAM	1	0	13.24	12.88	13.68	0-1	0
	1	7	13.33	12.87	13.70		0
	1	14	13.14	12.85	13.55		0
	8	0	13.15	12.59	13.46	0-2	0
	8	4	13.18	12.58	13.49		0
	8	7	13.13	12.51	13.44		0
	15	0	13.20	12.49	13.43		0

Table 8-40
LTE Band 2 (PCS) Reduced Conducted Powers -1.4 MHz Bandwidth

LTE Band 2 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18607 (1850.7 MHz)	18900 (1880.0 MHz)	19193 (1909.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	12.97	12.46	13.20	0	0
	1	2	13.04	12.49	13.24		0
	1	5	12.98	12.47	13.19		0
	3	0	13.00	12.39	13.29		0
	3	2	13.06	12.44	13.35		0
	3	3	13.01	12.32	13.29		0
	6	0	13.04	12.38	13.34	0-1	0
16QAM	1	0	13.14	12.24	13.49	0-1	0
	1	2	13.19	12.34	13.56		0
	1	5	13.10	12.27	13.50		0
	3	0	13.09	12.42	13.23		0
	3	2	13.12	12.50	13.21		0
	3	3	13.09	12.44	13.23		0
	6	0	13.13	12.52	13.41	0-2	0

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 38 of 71

8.4 WLAN Conducted Powers

Table 8-41
2.4 GHz WLAN Antenna 1 Average RF Power

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
2412	1	13.56	13.87	13.68
2437	6	13.53	13.58	13.86
2462	11	13.30	13.77	13.63

Table 8-42
2.4 GHz WLAN Antenna 2 Average RF Power

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
2412	1	13.22	13.14	13.03
2437	6	13.18	13.22	13.33
2462	11	13.15	13.20	12.98

Table 8-43
5 GHz WLAN Antenna 1 Average RF Power

5GHz (80MHz) Conducted Power [dBm]		
Freq [MHz]	Channel	IEEE Transmission Mode
		802.11ac
5210	42	10.19
5290	58	10.98
5530	106	10.79
5610	122	10.76
5690	138	10.33
5775	155	10.63

Table 8-44
5 GHz WLAN Antenna 2 Average RF Power

5GHz (80MHz) Conducted Power [dBm]		
Freq [MHz]	Channel	IEEE Transmission Mode
		802.11ac
5210	42	10.48
5290	58	10.37
5530	106	10.17
5610	122	10.13
5690	138	10.94
5775	155	10.83

FCC ID: A3LSMT825	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet	Page 39 of 71

Table 8-45
5 GHz WLAN MIMO Average RF Power

5GHz (80MHz) Conducted Power [dBm]				
Freq [MHz]	Channel	ANT1	ANT2	MIMO
5210	42	10.19	10.48	13.35
5290	58	10.98	10.37	13.70
5530	106	10.79	10.17	13.50
5610	122	10.76	10.13	13.47
5690	138	10.33	10.94	13.66
5775	155	10.63	10.83	13.74

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- The bolded data rate and channel above were tested for SAR.

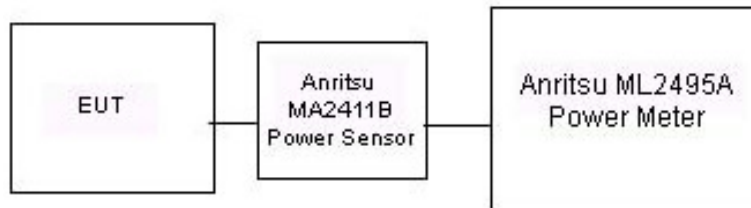


Table 8-46
Power Measurement Setup for Bandwidths < 50 MHz




Table 8-47
Power Measurement Setup for Bandwidths > 50 MHz

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 40 of 71

8.5 Bluetooth Conducted Powers

Table 8-48
Bluetooth Average RF Power

Frequency [MHz]	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
			[dBm]	[mW]
2402	1.0	0	9.31	8.539
2441	1.0	39	10.55	11.350
2480	1.0	78	10.13	10.313
2402	2.0	0	6.11	4.087
2441	2.0	39	7.32	5.398
2480	2.0	78	6.92	4.915
2402	3.0	0	6.18	4.153
2441	3.0	39	7.37	5.461
2480	3.0	78	6.98	4.984

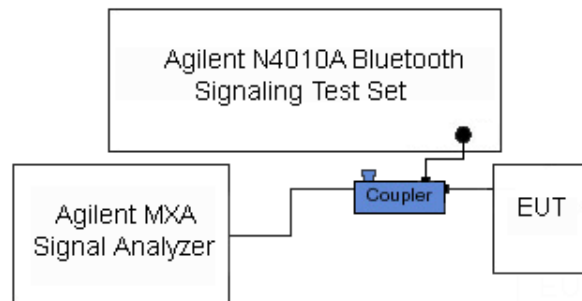


Figure 8-3
Power Measurement Setup

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 41 of 71

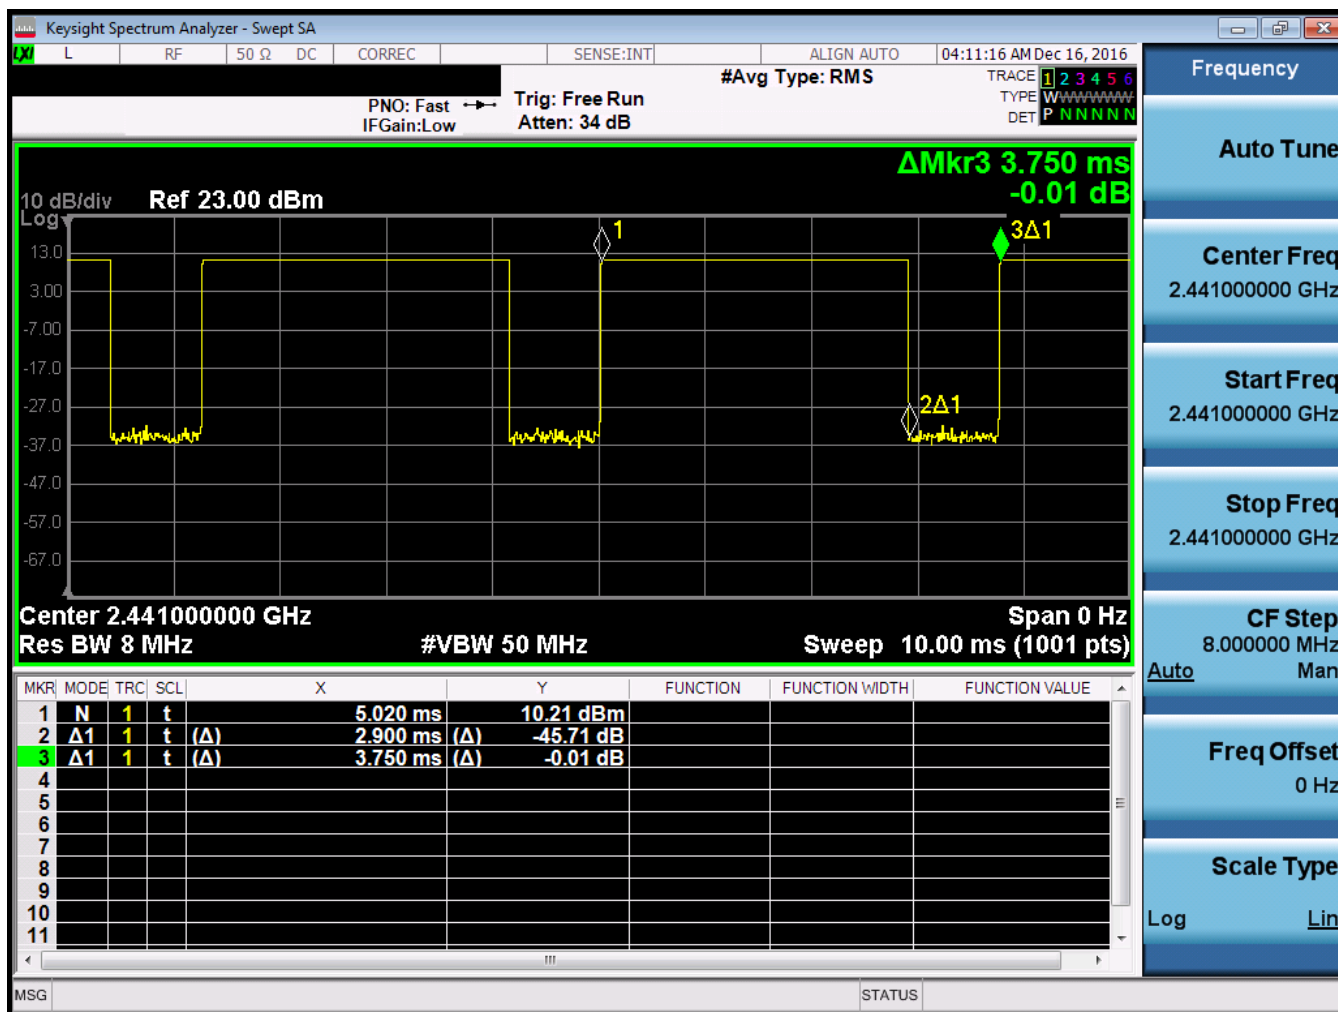


Figure 8-4
Bluetooth Transmission Plot

Equation 8-1
Bluetooth Duty Cycle Calculation

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.900 \text{ ms}}{3.750 \text{ ms}} * 100\% = 77.3\%$$

FCC ID: A3LSMT825	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet	Page 42 of 71

9 SYSTEM VERIFICATION

9.1 Tissue Verification

Table 9-1
Measured Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
12/13/2016	750B	21.3	710	0.928	56.219	0.960	55.687	-3.33%	0.96%
			740	0.956	55.951	0.963	55.570	-0.73%	0.69%
			755	0.969	55.775	0.964	55.512	0.52%	0.47%
12/12/2016	835B	20.8	820	0.980	54.215	0.969	55.258	1.14%	-1.89%
			835	0.995	54.078	0.970	55.200	2.58%	-2.03%
			850	1.009	53.922	0.988	55.154	2.13%	-2.23%
12/15/2016	835B	20.5	820	0.981	55.330	0.969	55.258	1.24%	0.13%
			835	0.996	55.195	0.970	55.200	2.68%	-0.01%
			850	1.012	55.050	0.988	55.154	2.43%	-0.19%
12/13/2016	1750B	22.5	1710	1.433	52.386	1.463	53.537	-2.05%	-2.15%
			1750	1.481	52.208	1.488	53.432	-0.47%	-2.29%
			1790	1.526	52.053	1.514	53.326	0.79%	-2.39%
12/14/2016	1900B	22.1	1850	1.522	52.165	1.520	53.300	0.13%	-2.13%
			1880	1.555	52.111	1.520	53.300	2.30%	-2.23%
			1910	1.588	52.015	1.520	53.300	4.47%	-2.41%
12/12/2016	2450B	23.3	2400	1.900	52.340	1.902	52.767	-0.11%	-0.81%
			2450	1.971	52.158	1.950	52.700	1.08%	-1.03%
			2500	2.040	51.932	2.021	52.636	0.94%	-1.34%
01/24/2017	2450B	23.7	2400	1.951	52.052	1.902	52.767	2.58%	-1.36%
			2450	2.014	51.856	1.950	52.700	3.28%	-1.60%
			2500	2.086	51.676	2.021	52.636	3.22%	-1.82%
12/26/2016	5200B-5800B	21.2	5240	5.511	47.075	5.346	48.960	3.09%	-3.85%
			5260	5.534	47.034	5.369	48.933	3.07%	-3.88%
			5280	5.545	46.970	5.393	48.906	2.82%	-3.96%
			5300	5.581	46.888	5.416	48.879	3.05%	-4.07%
			5320	5.605	46.935	5.439	48.851	3.05%	-3.92%
			5520	5.866	46.575	5.673	48.580	3.40%	-4.13%
			5540	5.888	46.552	5.696	48.553	3.37%	-4.12%
			5600	5.989	46.456	5.766	48.471	3.87%	-4.16%
			5620	6.016	46.437	5.790	48.444	3.90%	-4.14%
			5680	6.081	46.311	5.860	48.363	3.77%	-4.24%
			5700	6.124	46.243	5.883	48.336	4.10%	-4.33%
			5745	6.193	46.245	5.936	48.275	4.33%	-4.21%
			5765	6.211	46.222	5.959	48.248	4.23%	-4.20%
			5785	6.222	46.181	5.982	48.220	4.01%	-4.23%
			5825	6.300	46.060	6.029	48.166	4.49%	-4.37%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

FCC ID: A3LSMT825	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet	Page 43 of 71

9.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.

Table 9-2
System Verification Results

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Dipole SN	Probe SN	Measured SAR _{1g} (W/kg)	1 W Target SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation _{1g} (%)
K	750	BODY	12/13/2016	22.3	21.3	0.200	1161	7409	1.660	8.430	8.300	-1.54%
H	835	BODY	12/12/2016	21.2	21.8	0.200	4d047	3319	2.050	9.570	10.250	7.11%
H	835	BODY	12/15/2016	21.6	20.6	0.200	4d047	3319	2.030	9.570	10.150	6.06%
A	1750	BODY	12/13/2016	24.5	22.5	0.100	1150	3022	3.690	36.500	36.900	1.10%
K	1900	BODY	12/14/2016	23.1	22.3	0.100	5d080	7409	3.950	39.100	39.500	1.02%
C	2450	BODY	12/12/2016	24.0	23.3	0.100	719	7410	5.010	51.500	50.100	-2.72%
H	2450	BODY	01/24/2017	22.4	22.7	0.100	797	3319	5.210	50.700	52.100	2.76%
D	5250	BODY	12/26/2016	20.9	20.1	0.050	1237	3914	3.480	74.800	69.600	-6.95%
D	5600	BODY	12/26/2016	20.9	20.1	0.050	1237	3914	3.590	77.000	71.800	-6.75%
D	5750	BODY	12/26/2016	20.9	20.1	0.050	1237	3914	3.580	75.400	71.600	-5.04%

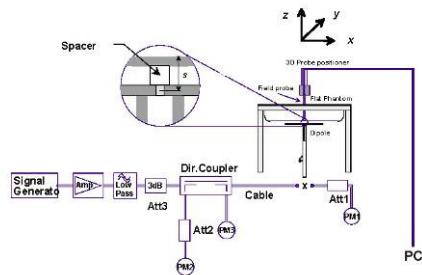


Figure 9-1
System Verification Setup Diagram



Figure 9-2
System Verification Setup Photo

FCC ID: A3LSMT825	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet	Page 44 of 71

10 SAR DATA SUMMARY

10.1 Standalone Body SAR Data

Table 10-1
GPRS Body SAR Data

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.											(W/kg)		(W/kg)		
824.20	128	GSM 850	GPRS	29.5	29.04	-0.06	13 mm	09999	3	1:2.76	back	0.975	1.112	1.084	A1	
836.60	190	GSM 850	GPRS	29.5	29.23	-0.01	13 mm	09999	3	1:2.76	back	1.030	1.064	1.096		
848.80	251	GSM 850	GPRS	29.5	29.26	0.01	13 mm	09999	3	1:2.76	back	1.030	1.057	1.089		
824.20	128	GSM 850	GPRS	29.5	29.04	0.07	19 mm	09999	3	1:2.76	top	0.709	1.112	0.788		
836.60	190	GSM 850	GPRS	29.5	29.23	0.04	19 mm	09999	3	1:2.76	top	0.850	1.064	0.904		
848.80	251	GSM 850	GPRS	29.5	29.26	0.03	19 mm	09999	3	1:2.76	top	0.788	1.057	0.833		
836.60	190	GSM 850	GPRS	29.5	29.23	0.02	0 mm	09999	3	1:2.76	right	0.149	1.064	0.159		
836.60	190	GSM 850	GPRS	29.5	29.23	-0.02	0 mm	09999	3	1:2.76	left	0.206	1.064	0.219		
836.60	190	GSM 850	GPRS	20.0	18.52	0.02	0 mm	09999	3	1:2.76	back	0.480	1.406	0.675		
836.60	190	GSM 850	GPRS	20.0	18.52	-0.06	0 mm	09999	3	1:2.76	top	0.524	1.406	0.737		
836.60	190	GSM 850	GPRS	29.5	29.23	0.07	13 mm	09999	3	1:2.76	back	0.967	1.064	1.029		
1909.80	810	GSM 1900	GPRS	27.0	26.00	-0.03	13 mm	09999	3	1:2.76	back	0.253	1.259	0.319		
1909.80	810	GSM 1900	GPRS	27.0	26.00	0.01	19 mm	09999	3	1:2.76	top	0.185	1.259	0.233		
1909.80	810	GSM 1900	GPRS	27.0	26.00	0.17	0 mm	09999	3	1:2.76	right	0.113	1.259	0.142		
1850.20	512	GSM 1900	GPRS	27.0	25.93	-0.04	0 mm	09999	3	1:2.76	left	0.615	1.279	0.787		
1880.00	661	GSM 1900	GPRS	27.0	25.43	-0.18	0 mm	09999	3	1:2.76	left	0.685	1.435	0.983		
1909.80	810	GSM 1900	GPRS	27.0	26.00	-0.01	0 mm	09999	3	1:2.76	left	0.735	1.259	0.925		
1850.20	512	GSM 1900	GPRS	18.5	18.20	-0.10	0 mm	09999	4	1:2.076	back	0.930	1.072	0.997		
1880.00	661	GSM 1900	GPRS	18.5	17.57	-0.14	0 mm	09999	4	1:2.076	back	0.866	1.239	1.073		
1909.80	810	GSM 1900	GPRS	18.5	18.34	-0.21	0 mm	09999	4	1:2.076	back	0.819	1.038	0.850		
1909.80	810	GSM 1900	GPRS	18.5	18.34	-0.04	0 mm	09999	4	1:2.076	top	0.428	1.038	0.444		
1850.20	512	GSM 1900	GPRS	18.5	18.20	-0.17	0 mm	09999	4	1:2.076	back	0.918	1.072	0.984		
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body								
Spatial Peak								1.6 W/kg (mW/g)								
Uncontrolled Exposure/General Population								averaged over 1 gram								

Note: Blue entries indicate variability measurements.

FCC ID: A3LSMT825	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet	Page 45 of 71

Table 10-2
UMTS Body SAR Data

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
826.40	4132	UMTS 850	RMC	24.5	22.84	-0.04	13 mm	09999	1:1	back	0.732	1.466	1.073	
836.60	4183	UMTS 850	RMC	24.5	22.76	-0.02	13 mm	09999	1:1	back	0.717	1.493	1.070	
846.60	4233	UMTS 850	RMC	24.5	22.85	-0.03	13 mm	09999	1:1	back	0.713	1.462	1.042	
836.60	4183	UMTS 850	RMC	24.5	22.76	0.00	19 mm	09999	1:1	top	0.511	1.493	0.763	
836.60	4183	UMTS 850	RMC	24.5	22.76	-0.06	0 mm	09999	1:1	right	0.126	1.493	0.188	
836.60	4183	UMTS 850	RMC	24.5	22.76	-0.04	0 mm	09999	1:1	left	0.144	1.493	0.215	
826.40	4132	UMTS 850	RMC	17.0	16.02	-0.01	0 mm	09999	1:1	back	0.732	1.253	0.917	
836.60	4183	UMTS 850	RMC	17.0	16.01	0.00	0 mm	09999	1:1	back	0.719	1.256	0.903	
846.60	4233	UMTS 850	RMC	17.0	16.03	0.01	0 mm	09999	1:1	back	0.726	1.250	0.908	
826.40	4132	UMTS 850	RMC	17.0	16.02	-0.04	0 mm	09999	1:1	top	0.751	1.253	0.941	
836.60	4183	UMTS 850	RMC	17.0	16.01	-0.03	0 mm	09999	1:1	top	0.745	1.256	0.936	
846.60	4233	UMTS 850	RMC	17.0	16.03	-0.05	0 mm	09999	1:1	top	0.763	1.250	0.954	A3
1712.40	1312	UMTS 1750	RMC	24.0	23.26	-0.01	13 mm	09999	1:1	back	0.865	1.186	1.026	A4
1732.40	1412	UMTS 1750	RMC	24.0	22.92	-0.01	13 mm	09999	1:1	back	0.763	1.282	0.978	
1752.60	1513	UMTS 1750	RMC	24.0	22.75	0.02	13 mm	09999	1:1	back	0.813	1.334	1.085	
1712.40	1312	UMTS 1750	RMC	24.0	23.26	-0.01	19 mm	09999	1:1	top	0.312	1.186	0.370	
1712.40	1312	UMTS 1750	RMC	24.0	23.26	0.02	0 mm	09999	1:1	right	0.130	1.186	0.154	
1712.40	1312	UMTS 1750	RMC	24.0	23.26	-0.03	0 mm	09999	1:1	left	0.323	1.186	0.383	
1712.40	1312	UMTS 1750	RMC	14.0	13.25	-0.07	0 mm	05260	1:1	back	0.603	1.189	0.717	
1712.40	1312	UMTS 1750	RMC	14.0	13.25	-0.03	0 mm	05260	1:1	top	0.308	1.189	0.366	
1907.60	9538	UMTS 1900	RMC	24.0	23.14	-0.01	13 mm	09999	1:1	back	0.603	1.219	0.735	
1907.60	9538	UMTS 1900	RMC	24.0	23.14	0.01	19 mm	09999	1:1	top	0.288	1.219	0.351	
1907.60	9538	UMTS 1900	RMC	24.0	23.14	0.05	0 mm	09999	1:1	right	0.161	1.219	0.196	
1852.40	9262	UMTS 1900	RMC	24.0	23.05	0.06	0 mm	09999	1:1	left	0.606	1.245	0.754	
1880.00	9400	UMTS 1900	RMC	24.0	22.30	0.08	0 mm	09999	1:1	left	0.563	1.479	0.833	
1907.60	9538	UMTS 1900	RMC	24.0	23.14	-0.03	0 mm	09999	1:1	left	0.791	1.219	0.964	A5
1907.60	9538	UMTS 1900	RMC	14.0	13.31	0.04	0 mm	09999	1:1	back	0.571	1.172	0.669	
1907.60	9538	UMTS 1900	RMC	14.0	13.31	-0.01	0 mm	09999	1:1	top	0.303	1.172	0.355	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body						
Spatial Peak								1.6 W/kg (mW/g)						
Uncontrolled Exposure/General Population								averaged over 1 gram						

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 46 of 71

Table 10-3
LTE Band 17 Body SAR Data

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g) (W/kg)	Plot #
MHz	Ch.														(W/kg)			
710.00	23790	Mid	LTE Band 17	10	23.5	22.34	0.01	0	09999	QPSK	1	25	13 mm	back	1:1	0.752	1.306	0.982
710.00	23790	Mid	LTE Band 17	10	22.5	21.44	0.03	1	09999	QPSK	25	12	13 mm	back	1:1	0.611	1.276	0.780
710.00	23790	Mid	LTE Band 17	10	22.5	21.38	0.03	1	09999	QPSK	50	0	13 mm	back	1:1	0.615	1.294	0.796
710.00	23790	Mid	LTE Band 17	10	23.5	22.34	-0.01	0	09999	QPSK	1	25	19 mm	top	1:1	0.337	1.306	0.440
710.00	23790	Mid	LTE Band 17	10	22.5	21.44	0.10	1	09999	QPSK	25	12	19 mm	top	1:1	0.285	1.276	0.364
710.00	23790	Mid	LTE Band 17	10	23.5	22.34	0.12	0	09999	QPSK	1	25	0 mm	right	1:1	0.139	1.306	0.182
710.00	23790	Mid	LTE Band 17	10	22.5	21.44	0.05	1	09999	QPSK	25	12	0 mm	right	1:1	0.128	1.276	0.163
710.00	23790	Mid	LTE Band 17	10	23.5	22.34	0.05	0	09999	QPSK	1	25	0 mm	left	1:1	0.237	1.306	0.310
710.00	23790	Mid	LTE Band 17	10	22.5	21.44	-0.07	1	09999	QPSK	25	12	0 mm	left	1:1	0.181	1.276	0.231
710.00	23790	Mid	LTE Band 17	10	17.0	16.21	0.05	0	09999	QPSK	1	25	0 mm	back	1:1	0.858	1.199	1.029
710.00	23790	Mid	LTE Band 17	10	17.0	16.20	0.05	0	09999	QPSK	25	0	0 mm	back	1:1	0.880	1.202	1.058
710.00	23790	Mid	LTE Band 17	10	17.0	16.18	0.07	0	09999	QPSK	50	0	0 mm	back	1:1	0.891	1.208	1.076
710.00	23790	Mid	LTE Band 17	10	17.0	16.21	-0.09	0	09999	QPSK	1	25	0 mm	top	1:1	0.695	1.199	0.833
710.00	23790	Mid	LTE Band 17	10	17.0	16.20	-0.09	0	09999	QPSK	25	0	0 mm	top	1:1	0.723	1.202	0.869
710.00	23790	Mid	LTE Band 17	10	17.0	16.18	-0.08	0	09999	QPSK	50	0	0 mm	top	1:1	0.760	1.208	0.918
710.00	23790	Mid	LTE Band 17	10	17.0	16.18	0.20	0	09999	QPSK	50	0	0 mm	back	1:1	0.899	1.208	1.086
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram								

Note: Blue entry indicates variability measurement.

Table 10-4
LTE Band 5 (Cell.) Body SAR Data

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g) (W/kg)	Plot #
MHz	Ch.														(W/kg)			
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	22.99	0.02	0	05286	QPSK	1	25	13 mm	back	1:1	0.500	1.416	0.708
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.5	22.11	-0.03	1	05286	QPSK	25	12	13 mm	back	1:1	0.408	1.377	0.562
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	22.99	0.04	0	05286	QPSK	1	25	19 mm	top	1:1	0.538	1.416	0.762
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.5	22.11	-0.01	1	05286	QPSK	25	12	19 mm	top	1:1	0.425	1.377	0.585
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	22.99	0.02	0	05286	QPSK	1	25	0 mm	right	1:1	0.099	1.416	0.140
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.5	22.11	-0.03	1	05286	QPSK	25	12	0 mm	right	1:1	0.084	1.377	0.116
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	22.99	-0.02	0	05286	QPSK	1	25	0 mm	left	1:1	0.195	1.416	0.276
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.5	22.11	-0.06	1	05286	QPSK	25	12	0 mm	left	1:1	0.151	1.377	0.208
836.50	20525	Mid	LTE Band 5 (Cell)	10	16.0	14.92	-0.04	0	05286	QPSK	1	25	0 mm	back	1:1	0.491	1.282	0.629
836.50	20525	Mid	LTE Band 5 (Cell)	10	16.0	15.08	-0.03	0	05286	QPSK	25	12	0 mm	back	1:1	0.510	1.236	0.630
836.50	20525	Mid	LTE Band 5 (Cell)	10	16.0	15.07	-0.04	0	05286	QPSK	50	0	0 mm	back	1:1	0.509	1.239	0.631
836.50	20525	Mid	LTE Band 5 (Cell)	10	16.0	14.92	-0.05	0	05286	QPSK	1	25	0 mm	top	1:1	0.551	1.282	0.706
836.50	20525	Mid	LTE Band 5 (Cell)	10	16.0	15.08	-0.02	0	05286	QPSK	25	12	0 mm	top	1:1	0.576	1.236	0.712
836.50	20525	Mid	LTE Band 5 (Cell)	10	16.0	15.07	-0.03	0	05286	QPSK	50	0	0 mm	top	1:1	0.571	1.239	0.707
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 47 of 71

Table 10-5
LTE Band 4 (AWS) Body SAR Data

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.1	23.65	-0.03	0	05260	QPSK	1	0	13 mm	back	1:1	0.982	1.109	1.089	A8
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.1	22.20	0.08	1	05260	QPSK	50	0	13 mm	back	1:1	0.677	1.230	0.833	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.1	21.99	0.03	1	05260	QPSK	100	0	13 mm	back	1:1	0.663	1.291	0.856	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.1	23.65	-0.04	0	05260	QPSK	1	0	19 mm	top	1:1	0.394	1.109	0.437	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.1	22.20	0.00	1	05260	QPSK	50	0	19 mm	top	1:1	0.283	1.230	0.348	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.1	23.65	0.06	0	05260	QPSK	1	0	0 mm	right	1:1	0.185	1.109	0.205	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.1	22.20	-0.01	1	05260	QPSK	50	0	0 mm	right	1:1	0.135	1.230	0.166	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.1	23.65	-0.05	0	05260	QPSK	1	0	0 mm	left	1:1	0.457	1.109	0.507	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.1	22.20	0.03	1	05260	QPSK	50	0	0 mm	left	1:1	0.331	1.230	0.407	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	14.0	13.20	0.00	0	05260	QPSK	1	0	0 mm	back	1:1	0.603	1.202	0.725	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	14.0	12.80	-0.01	0	05260	QPSK	50	0	0 mm	back	1:1	0.544	1.318	0.717	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	14.0	13.20	-0.10	0	05260	QPSK	1	0	0 mm	top	1:1	0.370	1.202	0.445	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	14.0	12.80	-0.02	0	05260	QPSK	50	0	0 mm	top	1:1	0.321	1.318	0.423	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.1	23.65	-0.01	0	05260	QPSK	1	0	13 mm	back	1:1	0.914	1.109	1.014	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Body									
Spatial Peak										1.6 W/kg (mW/g)									
Uncontrolled Exposure/General Population										averaged over 1 gram									

Note: Blue entry indicates variability measurement.

Table 10-6
LTE Band 2 (PCS) Body SAR Data

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1860.00	18700	Low	LTE Band 2 (PCS)	20	24.0	23.80	-0.03	0	14379	QPSK	1	0	13 mm	back	1:1	0.518	1.047	0.542	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.0	22.25	-0.19	1	14379	QPSK	50	0	13 mm	back	1:1	0.370	1.189	0.440	
1860.00	18700	Low	LTE Band 2 (PCS)	20	24.0	23.80	-0.09	0	14379	QPSK	1	0	19 mm	top	1:1	0.405	1.047	0.424	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.0	22.25	-0.01	1	14379	QPSK	50	0	19 mm	top	1:1	0.290	1.189	0.345	
1860.00	18700	Low	LTE Band 2 (PCS)	20	24.0	23.80	-0.01	0	14379	QPSK	1	0	0 mm	right	1:1	0.165	1.047	0.173	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.0	22.25	0.02	1	14379	QPSK	50	0	0 mm	right	1:1	0.118	1.189	0.140	
1860.00	18700	Low	LTE Band 2 (PCS)	20	24.0	23.80	-0.12	0	14379	QPSK	1	0	0 mm	left	1:1	0.538	1.047	0.563	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.0	22.25	-0.01	1	14379	QPSK	50	0	0 mm	left	1:1	0.401	1.189	0.477	
1860.00	18700	Low	LTE Band 2 (PCS)	20	14.0	13.70	-0.17	0	09999	QPSK	1	0	0 mm	back	1:1	0.685	1.072	0.734	A9
1860.00	18700	Low	LTE Band 2 (PCS)	20	14.0	13.27	-0.15	0	09999	QPSK	50	0	0 mm	back	1:1	0.623	1.183	0.737	
1860.00	18700	Low	LTE Band 2 (PCS)	20	14.0	13.70	0.02	0	09999	QPSK	1	0	0 mm	top	1:1	0.443	1.072	0.475	
1860.00	18700	Low	LTE Band 2 (PCS)	20	14.0	13.27	0.00	0	09999	QPSK	50	0	0 mm	top	1:1	0.400	1.183	0.473	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak										Body 1.6 W/kg (mW/g) averaged over 1 gram									
Uncontrolled Exposure/General Population																			

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 48 of 71

Table 10-7
2.4 GHz WLAN Body SAR Data

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
2412	1	802.11b	DSSS	22	14.0	13.56	-0.12	0 mm	1	05260	1	back	99.2	1.091	0.827	1.107	1.008	0.923	A10
2437	6	802.11b	DSSS	22	14.0	13.53	-0.09	0 mm	1	05260	1	back	99.2	1.129	0.855	1.114	1.008	0.960	
2412	1	802.11b	DSSS	22	14.0	13.56	-0.03	0 mm	1	05260	1	top	99.2	0.043	0.026	1.107	1.008	0.029	
2412	1	802.11b	DSSS	22	14.0	13.56	0.02	0 mm	1	05260	1	bottom	99.2	0.585	0.437	1.107	1.008	0.488	
2412	1	802.11b	DSSS	22	14.0	13.56	0.08	0 mm	1	05260	1	right	99.2	0.205	0.118	1.107	1.008	0.132	
2412	1	802.11b	DSSS	22	14.0	13.22	-0.10	0 mm	2	05260	1	back	98.8	0.550	0.462	1.197	1.012	0.560	
2412	1	802.11b	DSSS	22	14.0	13.22	-0.20	0 mm	2	05260	1	top	98.8	0.029	0.016	1.197	1.012	0.019	
2412	1	802.11b	DSSS	22	14.0	13.22	-0.09	0 mm	2	05260	1	bottom	98.8	0.542	0.367	1.197	1.012	0.445	
2412	1	802.11b	DSSS	22	14.0	13.22	0.16	0 mm	2	05260	1	left	98.8	0.142	0.086	1.197	1.012	0.104	
2437	6	802.11b	DSSS	22	14.0	13.53	-0.05	0 mm	1	05260	1	back	99.2	1.008	0.847	1.114	1.008	0.951	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram									

Note: Blue entry indicates variability measurement.

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 49 of 71

Table 10-8
5 GHz WLAN Body SAR Data

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
5290	58	802.11ac	OFDM	80	11.0	10.98	-0.11	0 mm	1	05211	29.3	back	86.9	1.370	0.739	1.005	1.151	0.855	
5290	58	802.11ac	OFDM	80	11.0	10.98	0.13	0 mm	1	05211	29.3	top	86.9	0.081	0.019	1.005	1.151	0.022	
5290	58	802.11ac	OFDM	80	11.0	10.98	-0.17	0 mm	1	05211	29.3	bottom	86.9	1.945	0.737	1.005	1.151	0.853	
5290	58	802.11ac	OFDM	80	11.0	10.98	0.17	0 mm	1	05211	29.3	right	86.9	0.939	0.298	1.005	1.151	0.345	
5290	58	802.11ac	OFDM	80	11.0	10.98	0.14	0 mm	1	05211	29.3	left	86.9	0.075	0.033	1.005	1.151	0.038	
5290	58	802.11ac	OFDM	80	11.0	10.37	-0.17	0 mm	2	05211	29.3	back	86.9	1.539	0.814	1.156	1.151	1.083	
5290	58	802.11ac	OFDM	80	11.0	10.37	0.10	0 mm	2	05211	29.3	top	86.9	0.037	0.012	1.156	1.151	0.016	
5290	58	802.11ac	OFDM	80	11.0	10.37	-0.10	0 mm	2	05211	29.3	bottom	86.9	1.545	0.568	1.156	1.151	0.756	
5290	58	802.11ac	OFDM	80	11.0	10.37	0.19	0 mm	2	05211	29.3	left	86.9	0.613	0.184	1.156	1.151	0.245	
5290	58	802.11ac	OFDM	80	14.0	13.70	0.18	0 mm	MIMO	05211	58.5	bottom	85.9	1.198	0.680	1.156	1.164	0.915	
5530	106	802.11ac	OFDM	80	11.0	10.79	0.20	0 mm	1	05211	29.3	back	86.9	3.005	0.893	1.050	1.151	1.079	
5610	122	802.11ac	OFDM	80	11.0	10.76	-0.13	0 mm	1	05211	29.3	back	86.9	0.836	0.812	1.057	1.151	0.988	
5530	106	802.11ac	OFDM	80	11.0	10.79	0.19	0 mm	1	05211	29.3	top	86.9	0.010	0.000	1.050	1.151	0.000	
5530	106	802.11ac	OFDM	80	11.0	10.79	0.19	0 mm	1	05211	29.3	bottom	86.9	1.526	0.486	1.050	1.151	0.587	
5530	106	802.11ac	OFDM	80	11.0	10.79	0.10	0 mm	1	05211	29.3	right	86.9	0.378	0.128	1.050	1.151	0.155	
5530	106	802.11ac	OFDM	80	11.0	10.79	0.06	0 mm	1	05211	29.3	left	86.9	0.014	0.017	1.050	1.151	0.021	
5690	138	802.11ac	OFDM	80	11.0	10.94	-0.17	0 mm	2	05211	29.3	back	86.9	0.934	0.456	1.014	1.151	0.532	
5690	138	802.11ac	OFDM	80	11.0	10.94	0.10	0 mm	2	05211	29.3	top	86.9	0.029	0.006	1.014	1.151	0.007	
5690	138	802.11ac	OFDM	80	11.0	10.94	-0.04	0 mm	2	05211	29.3	bottom	86.9	1.066	0.373	1.014	1.151	0.435	
5690	138	802.11ac	OFDM	80	11.0	10.94	0.10	0 mm	2	05211	29.3	left	86.9	0.162	0.060	1.014	1.151	0.070	
5690	138	802.11ac	OFDM	80	14.0	13.66	0.14	0 mm	MIMO	05211	58.5	bottom	85.9	0.699	0.402	1.050	1.164	0.491	
5775	155	802.11ac	OFDM	80	11.0	10.63	-0.13	0 mm	1	05211	29.3	back	86.9	1.548	0.623	1.089	1.151	0.781	
5775	155	802.11ac	OFDM	80	11.0	10.63	0.10	0 mm	1	05211	29.3	top	86.9	0.017	0.001	1.089	1.151	0.001	
5775	155	802.11ac	OFDM	80	11.0	10.63	-0.10	0 mm	1	05211	29.3	bottom	86.9	0.733	0.271	1.089	1.151	0.340	
5775	155	802.11ac	OFDM	80	11.0	10.63	0.19	0 mm	1	05211	29.3	right	86.9	0.250	0.093	1.089	1.151	0.117	
5775	155	802.11ac	OFDM	80	11.0	10.63	0.10	0 mm	1	05211	29.3	left	86.9	0.014	0.017	1.089	1.151	0.021	
5775	155	802.11ac	OFDM	80	11.0	10.83	0.05	0 mm	2	05211	29.3	back	86.9	0.831	0.471	1.040	1.151	0.564	
5775	155	802.11ac	OFDM	80	11.0	10.83	0.13	0 mm	2	05211	29.3	top	86.9	0.031	0.009	1.040	1.151	0.011	
5775	155	802.11ac	OFDM	80	11.0	10.83	-0.15	0 mm	2	05211	29.3	bottom	86.9	1.069	0.348	1.040	1.151	0.417	
5775	155	802.11ac	OFDM	80	11.0	10.83	0.17	0 mm	2	05211	29.3	left	86.9	0.177	0.067	1.040	1.151	0.080	
5775	155	802.11ac	OFDM	80	14.0	13.74	-0.13	0 mm	MIMO	05211	58.5	bottom	85.9	0.491	0.269	1.089	1.164	0.341	
5290	58	802.11ac	OFDM	80	11.0	10.37	-0.13	0 mm	2	05211	29.3	back	86.9	1.843	0.813	1.156	1.151	1.082	
5530	106	802.11ac	OFDM	80	11.0	10.79	-0.14	0 mm	1	05211	29.3	back	86.9	1.081	0.900	1.050	1.151	1.088	A11
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Body									
Spatial Peak										1.6 W/kg (mW/g)									
Uncontrolled Exposure/General Population										averaged over 1 gram									

Note: Blue entries indicate variability measurements.

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 50 of 71

Table 10-9
Bluetooth Body SAR Data

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)			(W/kg)	
2441	39	Bluetooth	FHSS	11.0	10.55	0.19	0 mm	05260	1	back	77.3	0.053	1.109	1.294	0.076	
2441	39	Bluetooth	FHSS	11.0	10.55	0.03	0 mm	05260	1	bottom	77.3	0.074	1.109	1.294	0.106	A12
2441	39	Bluetooth	FHSS	11.0	10.55	0.13	0 mm	05260	1	right	77.3	0.010	1.109	1.294	0.014	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram							

10.2 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in FCC KDB Publication 616217 D04v01r02 and FCC KDB Publication 447498 D01v06.
2. Batteries are fully charged at the beginning of the SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
6. Per FCC KDB 865664 D01v01r04, variability SAR tests were performed when the measured SAR results for a frequency band were greater than or equal to 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 12 for variability analysis.
7. FCC KDB Publication 616217 D04v01r02 Section 4.3, SAR tests are required for the back surface and edges of the tablet with the tablet touching the phantom. The SAR Exclusion Threshold in FCC KDB 447498 D01v06 was applied to determine SAR test exclusion for adjacent edge configurations.

GSM Test Notes:

1. Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

UMTS Notes:

1. UMTS mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 51 of 71

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r04. The general test procedures used for testing can be found in Section 7.5.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

WLAN Notes:

1. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 7.6.4 for more information.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg. See Section 7.6.5 for more information.
3. Per KDB Publication 248227 D01v02r02, SAR for MIMO was evaluated by following the simultaneous SAR provisions from KDB Publication 447498 D01v06. Please see Section 11 for complete analysis.
4. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.

Bluetooth Notes:

1. Bluetooth SAR was measured with the device connected to a call box with hopping disabled with DH5 operation and Tx Tests test mode type. Per October 2016 TCB Workshop Notes, the reported SAR was scaled to the 100% transmission duty factor to determine compliance. See Section 8.5 for the time-domain plot and calculation for the duty factor of the device.

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 52 of 71

11 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

11.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

11.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB Publication 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is ≤ 1.6 W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1-g or 10-g SAR.

When standalone SAR is not required to be measured, per FCC KDB 447498 D01v06 4.3.2 b), the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 53 of 71

11.3 Body SAR Simultaneous Transmission Analysis

Table 11-1
Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	GPRS 850 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)			SPLSR		
		1	2	3	1+2	1+3	1+2+3	1+2	1+3	2+3
Body SAR	Back	1.096	0.960	0.560	See Note 1	See Note 1	See Note 1	0.01	0.01	0.02
	Top	0.904	0.029	0.019	0.933	0.923	0.952	N/A	N/A	N/A
	Bottom	0.400	0.488	0.445	0.888	0.845	1.333	N/A	N/A	N/A
	Right	0.159	0.132	0.400	0.291	0.559	0.691	N/A	N/A	N/A
	Left	0.219	0.400	0.104	0.619	0.323	0.723	N/A	N/A	N/A

Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)			SPLSR		
		1	2	3	1+2	1+3	1+2+3	1+2	1+3	2+3
Body SAR	Back	1.073	0.960	0.560	See Note 1	See Note 1	See Note 1	0.01	0.01	0.02
	Top	0.444	0.029	0.019	0.473	0.463	0.492	N/A	N/A	N/A
	Bottom	0.400	0.488	0.445	0.888	0.845	1.333	N/A	N/A	N/A
	Right	0.142	0.132	0.400	0.274	0.542	0.674	N/A	N/A	N/A
	Left	0.983	0.400	0.104	1.383	1.087	1.487	N/A	N/A	N/A

Simult Tx	Configuration	UMTS 850 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)			SPLSR		
		1	2	3	1+2	1+3	1+2+3	1+2	1+3	2+3
Body SAR	Back	1.073	0.960	0.560	See Note 1	See Note 1	See Note 1	0.01	0.01	0.02
	Top	0.954	0.029	0.019	0.983	0.973	1.002	N/A	N/A	N/A
	Bottom	0.400	0.488	0.445	0.888	0.845	1.333	N/A	N/A	N/A
	Right	0.188	0.132	0.400	0.320	0.588	0.720	N/A	N/A	N/A
	Left	0.215	0.400	0.104	0.615	0.319	0.719	N/A	N/A	N/A

Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)			SPLSR		
		1	2	3	1+2	1+3	1+2+3	1+2	1+3	2+3
Body SAR	Back	1.085	0.960	0.560	See Note 1	See Note 1	See Note 1	0.01	0.01	0.02
	Top	0.370	0.029	0.019	0.399	0.389	0.418	N/A	N/A	N/A
	Bottom	0.400	0.488	0.445	0.888	0.845	1.333	N/A	N/A	N/A
	Right	0.154	0.132	0.400	0.286	0.554	0.686	N/A	N/A	N/A
	Left	0.383	0.400	0.104	0.783	0.487	0.887	N/A	N/A	N/A

Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)			SPLSR		
		1	2	3	1+2	1+3	1+2+3	1+2	1+3	2+3
Body SAR	Back	0.735	0.960	0.560	See Note 1	1.295	See Note 1	0.01	0.01	0.02
	Top	0.355	0.029	0.019	0.384	0.374	0.403	N/A	N/A	N/A
	Bottom	0.400	0.488	0.445	0.888	0.845	1.333	N/A	N/A	N/A
	Right	0.196	0.132	0.400	0.328	0.596	0.728	N/A	N/A	N/A
	Left	0.964	0.400	0.104	1.364	1.068	1.468	N/A	N/A	N/A

FCC ID: A3LSMT825	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet	Page 54 of 71

Simult Tx	Configuration	LTE Band 17 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)			SPLSR		
		1	2	3	1+2	1+3	1+2+3	1+2	1+3	2+3
Body SAR	Back	1.086	0.960	0.560	See Note 1	See Note 1	See Note 1	0.01	0.01	0.02
	Top	0.918	0.029	0.019	0.947	0.937	0.966	N/A	N/A	N/A
	Bottom	0.400	0.488	0.445	0.888	0.845	1.333	N/A	N/A	N/A
	Right	0.182	0.132	0.400	0.314	0.582	0.714	N/A	N/A	N/A
	Left	0.310	0.400	0.104	0.710	0.414	0.814	N/A	N/A	N/A

Simult Tx	Configuration	LTE Band 5 (Cell) SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)			SPLSR		
		1	2	3	1+2	1+3	1+2+3	1+2	1+3	2+3
Body SAR	Back	0.708	0.960	0.560	See Note 1	1.268	See Note 1	0.01	0.01	0.02
	Top	0.762	0.029	0.019	0.791	0.781	0.810	N/A	N/A	N/A
	Bottom	0.400	0.488	0.445	0.888	0.845	1.333	N/A	N/A	N/A
	Right	0.140	0.132	0.400	0.272	0.540	0.672	N/A	N/A	N/A
	Left	0.276	0.400	0.104	0.676	0.380	0.780	N/A	N/A	N/A

Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)			SPLSR		
		1	2	3	1+2	1+3	1+2+3	1+2	1+3	2+3
Body SAR	Back	1.089	0.960	0.560	See Note 1	See Note 1	See Note 1	0.01	0.01	0.02
	Top	0.445	0.029	0.019	0.474	0.464	0.493	N/A	N/A	N/A
	Bottom	0.400	0.488	0.445	0.888	0.845	1.333	N/A	N/A	N/A
	Right	0.205	0.132	0.400	0.337	0.605	0.737	N/A	N/A	N/A
	Left	0.507	0.400	0.104	0.907	0.611	1.011	N/A	N/A	N/A

Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)			SPLSR		
		1	2	3	1+2	1+3	1+2+3	1+2	1+3	2+3
Body SAR	Back	0.737	0.960	0.560	See Note 1	1.297	See Note 1	0.01	0.01	0.02
	Top	0.475	0.029	0.019	0.504	0.494	0.523	N/A	N/A	N/A
	Bottom	0.400	0.488	0.445	0.888	0.845	1.333	N/A	N/A	N/A
	Right	0.173	0.132	0.400	0.305	0.573	0.705	N/A	N/A	N/A
	Left	0.563	0.400	0.104	0.963	0.667	1.067	N/A	N/A	N/A

FCC ID: A3LSMT825	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet	Page 55 of 71

Table 11-2
Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	GPRS 850 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)			SPLSR		
		1	2	3	1+2	1+3	1+2+3	1+2	1+3	2+3
Body SAR	Back	1.096	1.088	1.083	See Note 1	See Note 1	See Note 1	0.01	0.01	0.04
	Top	0.904	0.022	0.016	0.926	0.920	0.942	N/A	N/A	N/A
	Bottom	0.400	0.853	0.756	1.253	1.156	See Table 11-3	N/A	N/A	N/A
	Right	0.159	0.345	0.400	0.504	0.559	0.904	N/A	N/A	N/A
	Left	0.219	0.038	0.245	0.257	0.464	0.502	N/A	N/A	N/A

Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)			SPLSR		
		1	2	3	1+2	1+3	1+2+3	1+2	1+3	2+3
Body SAR	Back	1.073	1.088	1.083	See Note 1	See Note 1	See Note 1	0.01	0.01	0.04
	Top	0.444	0.022	0.016	0.466	0.482	0.482	N/A	N/A	N/A
	Bottom	0.400	0.853	0.756	1.253	1.156	See Table 11-3	N/A	N/A	N/A
	Right	0.142	0.345	0.400	0.487	0.542	0.887	N/A	N/A	N/A
	Left	0.983	0.038	0.245	1.021	1.228	1.266	N/A	N/A	N/A

Simult Tx	Configuration	UMTS 850 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)			SPLSR		
		1	2	3	1+2	1+3	1+2+3	1+2	1+3	2+3
Body SAR	Back	1.073	1.088	1.083	See Note 1	See Note 1	See Note 1	0.01	0.01	0.04
	Top	0.954	0.022	0.016	0.976	0.970	0.992	N/A	N/A	N/A
	Bottom	0.400	0.853	0.756	1.253	1.156	See Table 11-3	N/A	N/A	N/A
	Right	0.188	0.345	0.400	0.533	0.588	0.933	N/A	N/A	N/A
	Left	0.215	0.038	0.245	0.253	0.460	0.498	N/A	N/A	N/A

Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)			SPLSR		
		1	2	3	1+2	1+3	1+2+3	1+2	1+3	2+3
Body SAR	Back	1.085	1.088	1.083	See Note 1	See Note 1	See Note 1	0.01	0.01	0.04
	Top	0.370	0.022	0.016	0.392	0.386	0.408	N/A	N/A	N/A
	Bottom	0.400	0.853	0.756	1.253	1.156	See Table 11-3	N/A	N/A	N/A
	Right	0.154	0.345	0.400	0.499	0.554	0.899	N/A	N/A	N/A
	Left	0.383	0.038	0.245	0.421	0.628	0.666	N/A	N/A	N/A

Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)			SPLSR		
		1	2	3	1+2	1+3	1+2+3	1+2	1+3	2+3
Body SAR	Back	0.735	1.088	1.083	See Note 1	See Note 1	See Note 1	0.01	0.01	0.04
	Top	0.355	0.022	0.016	0.377	0.371	0.393	N/A	N/A	N/A
	Bottom	0.400	0.853	0.756	1.253	1.156	See Table 11-3	N/A	N/A	N/A
	Right	0.196	0.345	0.400	0.541	0.596	0.941	N/A	N/A	N/A
	Left	0.964	0.038	0.245	1.002	1.209	1.247	N/A	N/A	N/A

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 56 of 71

Simult Tx	Configuration	LTE Band 17 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)			SPLSR		
		1	2	3	1+2	1+3	1+2+3	1+2	1+3	2+3
Body SAR	Back	1.086	1.088	1.083	See Note 1	See Note 1	See Note 1	0.01	0.01	0.04
	Top	0.918	0.022	0.016	0.940	0.934	0.956	N/A	N/A	N/A
	Bottom	0.400	0.853	0.756	1.253	1.156	See Table 11-3	N/A	N/A	N/A
	Right	0.182	0.345	0.400	0.527	0.582	0.927	N/A	N/A	N/A
	Left	0.310	0.038	0.245	0.348	0.555	0.593	N/A	N/A	N/A
Simult Tx	Configuration	LTE Band 5 (Cell) SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)			SPLSR		
		1	2	3	1+2	1+3	1+2+3	1+2	1+3	2+3
Body SAR	Back	0.708	1.088	1.083	See Note 1	See Note 1	See Note 1	0.01	0.01	0.04
	Top	0.762	0.022	0.016	0.784	0.778	0.800	N/A	N/A	N/A
	Bottom	0.400	0.853	0.756	1.253	1.156	See Table 11-3	N/A	N/A	N/A
	Right	0.140	0.345	0.400	0.485	0.540	0.885	N/A	N/A	N/A
	Left	0.276	0.038	0.245	0.314	0.521	0.559	N/A	N/A	N/A
Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)			SPLSR		
		1	2	3	1+2	1+3	1+2+3	1+2	1+3	2+3
Body SAR	Back	1.089	1.088	1.083	See Note 1	See Note 1	See Note 1	0.01	0.01	0.04
	Top	0.445	0.022	0.016	0.467	0.461	0.483	N/A	N/A	N/A
	Bottom	0.400	0.853	0.756	1.253	1.156	See Table 11-3	N/A	N/A	N/A
	Right	0.205	0.345	0.400	0.550	0.605	0.950	N/A	N/A	N/A
	Left	0.507	0.038	0.245	0.545	0.752	0.790	N/A	N/A	N/A
Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)			SPLSR		
		1	2	3	1+2	1+3	1+2+3	1+2	1+3	2+3
Body SAR	Back	0.737	1.088	1.083	See Note 1	See Note 1	See Note 1	0.01	0.01	0.04
	Top	0.475	0.022	0.016	0.497	0.491	0.513	N/A	N/A	N/A
	Bottom	0.400	0.853	0.756	1.253	1.156	See Table 11-3	N/A	N/A	N/A
	Right	0.173	0.345	0.400	0.518	0.573	0.918	N/A	N/A	N/A
	Left	0.563	0.038	0.245	0.601	0.808	0.846	N/A	N/A	N/A

Table 11-3
Bottom Edge Simultaneous Transmission Scenario with 5 GHz WLAN

Configuration	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Bottom Edge	GSM 850	0.400	0.915	1.315
Bottom Edge	GSM 1900	0.400	0.915	1.315
Bottom Edge	UMTS 850	0.400	0.915	1.315
Bottom Edge	UMTS 1750	0.400	0.915	1.315
Bottom Edge	UMTS 1900	0.400	0.915	1.315
Bottom Edge	LTE Band 17	0.400	0.915	1.315
Bottom Edge	LTE Band 5 (Cell)	0.400	0.915	1.315
Bottom Edge	LTE Band 4 (AWS)	0.400	0.915	1.315
Bottom Edge	LTE Band 2 (PCS)	0.400	0.915	1.315

FCC ID: A3LSMT825	 SAR EVALUATION REPORT 	Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet
Page 57 of 71		

Table 11-4
Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	GPRS 850 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	1.096	0.076	1.172
	Top	0.904	0.400	1.304
	Bottom	0.400	0.106	0.506
	Right	0.159	0.014	0.173
	Left	0.219	0.400	0.619

Simult Tx	Configuration	UMTS 850 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	1.073	0.076	1.149
	Top	0.954	0.400	1.354
	Bottom	0.400	0.106	0.506
	Right	0.188	0.014	0.202
	Left	0.215	0.400	0.615

Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.735	0.076	0.811
	Top	0.355	0.400	0.755
	Bottom	0.400	0.106	0.506
	Right	0.196	0.014	0.210
	Left	0.964	0.400	1.364

Simult Tx	Configuration	LTE Band 5 (Cell) SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.708	0.076	0.784
	Top	0.762	0.400	1.162
	Bottom	0.400	0.106	0.506
	Right	0.140	0.014	0.154
	Left	0.276	0.400	0.676

Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	1.073	0.076	1.149
	Top	0.444	0.400	0.844
	Bottom	0.400	0.106	0.506
	Right	0.142	0.014	0.156
	Left	0.983	0.400	1.383

Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	1.085	0.076	1.161
	Top	0.370	0.400	0.770
	Bottom	0.400	0.106	0.506
	Right	0.154	0.014	0.168
	Left	0.383	0.400	0.783

Simult Tx	Configuration	LTE Band 17 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	1.086	0.076	1.162
	Top	0.918	0.400	1.318
	Bottom	0.400	0.106	0.506
	Right	0.182	0.014	0.196
	Left	0.310	0.400	0.710

Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	1.089	0.076	1.165
	Top	0.445	0.400	0.845
	Bottom	0.400	0.106	0.506
	Right	0.205	0.014	0.219
	Left	0.507	0.400	0.907

Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.737	0.076	0.813
	Top	0.475	0.400	0.875
	Bottom	0.400	0.106	0.506
	Right	0.173	0.014	0.187
	Left	0.563	0.400	0.963

Notes:

1. No evaluation was performed to determine the aggregate 1g SAR for these configurations as the SPLS ratio between the antenna pairs was not greater than 0.04 per FCC KDB 447498 D01v06. See Section 11.4 for detailed SPLS ratio analysis.
2. For SAR summation, the highest reported SAR across all test distances was used as the most conservative evaluation for simultaneous transmission analysis for each device edge.
3. When the antenna separation distance was > 50 mm, an estimated SAR of 0.4 W/kg was used to determine the simultaneous transmission SAR exclusion for test positions excluded per FCC KDB Publication 447498 D01v06.

FCC ID: A3LSMT825	 SAR EVALUATION REPORT 	Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet
Page 58 of 71		

11.4 SPLSR Evaluation and Analysis

Per FCC KDB Publication 447498 D01v06, when the sum of the standalone transmitters is more than 1.6 W/kg for 1g, the SAR sum to peak locations can be analyzed to determine SAR distribution overlaps. When the SAR peak to location ratio (shown below) for each pair of antennas is ≤ 0.04 for 1g, simultaneous SAR evaluation is not required. The distance between the transmitters was calculated using the following formula.

$$\text{Distance}_{T_{X1} - T_{X2}} = R_i = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2}$$

$$\text{SPLS Ratio} = \frac{(SAR_1 + SAR_2)^{1.5}}{R_i}$$

11.4.1 Back Side SPLSR Evaluation and Analysis

Table 11-5
Peak SAR Locations for Body Back Side

Mode/Band	x (mm)	y (mm)	Reported SAR (W/kg)
2.4 GHz WLAN Ant 1	-65.80	-104.40	0.960
2.4 GHz WLAN Ant 2	41.60	-106.80	0.560
5 GHz WLAN Ant 1	-63.00	-108.00	1.088
5 GHz WLAN Ant 2	9.00	-110.00	1.083
GPRS 850	-14.00	122.50	1.096
GPRS 1900	8.50	111.00	1.073
UMTS 850	-15.50	120.00	1.073
UMTS 1750	-2.00	114.00	1.085
UMTS 1900	-3.50	112.50	0.735
LTE Band 17	-19.50	121.50	1.086
LTE Band 5 (Cell)	-14.00	120.00	0.708
LTE Band 4 (AWS)	1.00	112.50	1.089
LTE Band 2 (PCS)	10.00	111.00	0.737


FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 59 of 71

Table 11-6
Back Side SAR to Peak Location Separation Ratio Calculations

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance	SPLS Ratio	Plot Number
Ant "a"	Ant "b"	a	b	a+b	D _{a-b}	(a+b) ^{1.5} /D _{a-b}	
2.4 GHz WLAN Ant 1	2.4 GHz WLAN Ant 2	0.960	0.560	1.520	107.43	0.02	1
GPRS 850	2.4 GHz WLAN Ant 1	1.096	0.960	2.056	232.74	0.01	2
GPRS 850	2.4 GHz WLAN Ant 2	1.096	0.560	1.656	235.94	0.01	3
GPRS 1900	2.4 GHz WLAN Ant 1	1.073	0.960	2.033	227.85	0.01	4
GPRS 1900	2.4 GHz WLAN Ant 2	1.073	0.560	1.633	220.30	0.01	5
UMTS 850	2.4 GHz WLAN Ant 1	1.073	0.960	2.033	229.97	0.01	6
UMTS 850	2.4 GHz WLAN Ant 2	1.073	0.560	1.633	233.88	0.01	7
UMTS 1750	2.4 GHz WLAN Ant 1	1.085	0.960	2.045	227.53	0.01	8
UMTS 1750	2.4 GHz WLAN Ant 2	1.085	0.560	1.645	225.06	0.01	9
UMTS 1900	2.4 GHz WLAN Ant 1	0.735	0.960	1.695	225.67	0.01	10
UMTS 1900	2.4 GHz WLAN Ant 2	0.735	0.560	1.295	223.89	0.01	11
LTE Band 17	2.4 GHz WLAN Ant 1	1.086	0.960	2.046	230.60	0.01	12
LTE Band 17	2.4 GHz WLAN Ant 2	1.086	0.560	1.646	236.33	0.01	13
LTE Band 5 (Cell)	2.4 GHz WLAN Ant 1	0.708	0.960	1.668	230.30	0.01	14
LTE Band 5 (Cell)	2.4 GHz WLAN Ant 2	0.708	0.560	1.268	233.52	0.01	15
LTE Band 4 (AWS)	2.4 GHz WLAN Ant 1	1.089	0.960	2.049	226.95	0.01	16
LTE Band 4 (AWS)	2.4 GHz WLAN Ant 2	1.089	0.560	1.649	223.03	0.01	17
LTE Band 2 (PCS)	2.4 GHz WLAN Ant 1	0.737	0.960	1.697	228.35	0.01	18
LTE Band 2 (PCS)	2.4 GHz WLAN Ant 2	0.737	0.560	1.297	220.08	0.01	19
5 GHz WLAN Ant 1	5 GHz WLAN Ant 2	1.088	1.083	2.171	72.03	0.04	20
GPRS 850	5 GHz WLAN Ant 1	1.096	1.088	2.184	235.65	0.01	21
GPRS 850	5 GHz WLAN Ant 2	1.096	1.083	2.179	233.63	0.01	22
GPRS 1900	5 GHz WLAN Ant 1	1.073	1.088	2.161	230.38	0.01	23
GPRS 1900	5 GHz WLAN Ant 2	1.073	1.083	2.156	221.00	0.01	24
UMTS 850	5 GHz WLAN Ant 1	1.073	1.088	2.161	232.90	0.01	25
UMTS 850	5 GHz WLAN Ant 2	1.073	1.083	2.156	231.30	0.01	26
UMTS 1750	5 GHz WLAN Ant 1	1.085	1.088	2.173	230.23	0.01	27
UMTS 1750	5 GHz WLAN Ant 2	1.085	1.083	2.168	224.27	0.01	28
UMTS 1900	5 GHz WLAN Ant 1	0.735	1.088	1.823	228.39	0.01	29
UMTS 1900	5 GHz WLAN Ant 2	0.735	1.083	1.818	222.85	0.01	30
LTE Band 17	5 GHz WLAN Ant 1	1.086	1.088	2.174	233.59	0.01	31
LTE Band 17	5 GHz WLAN Ant 2	1.086	1.083	2.169	233.25	0.01	32
LTE Band 5 (Cell)	5 GHz WLAN Ant 1	0.708	1.088	1.796	233.21	0.01	33
LTE Band 5 (Cell)	5 GHz WLAN Ant 2	0.708	1.083	1.791	231.15	0.01	34
LTE Band 4 (AWS)	5 GHz WLAN Ant 1	1.089	1.088	2.177	229.60	0.01	35
LTE Band 4 (AWS)	5 GHz WLAN Ant 2	1.089	1.083	2.172	222.64	0.01	36
LTE Band 2 (PCS)	5 GHz WLAN Ant 1	0.737	1.088	1.825	230.85	0.01	37
LTE Band 2 (PCS)	5 GHz WLAN Ant 2	0.737	1.083	1.820	221.00	0.01	38


FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet	Page 60 of 71	

Table 11-7
Back Side SAR to Peak Location Separation Ratio Plots

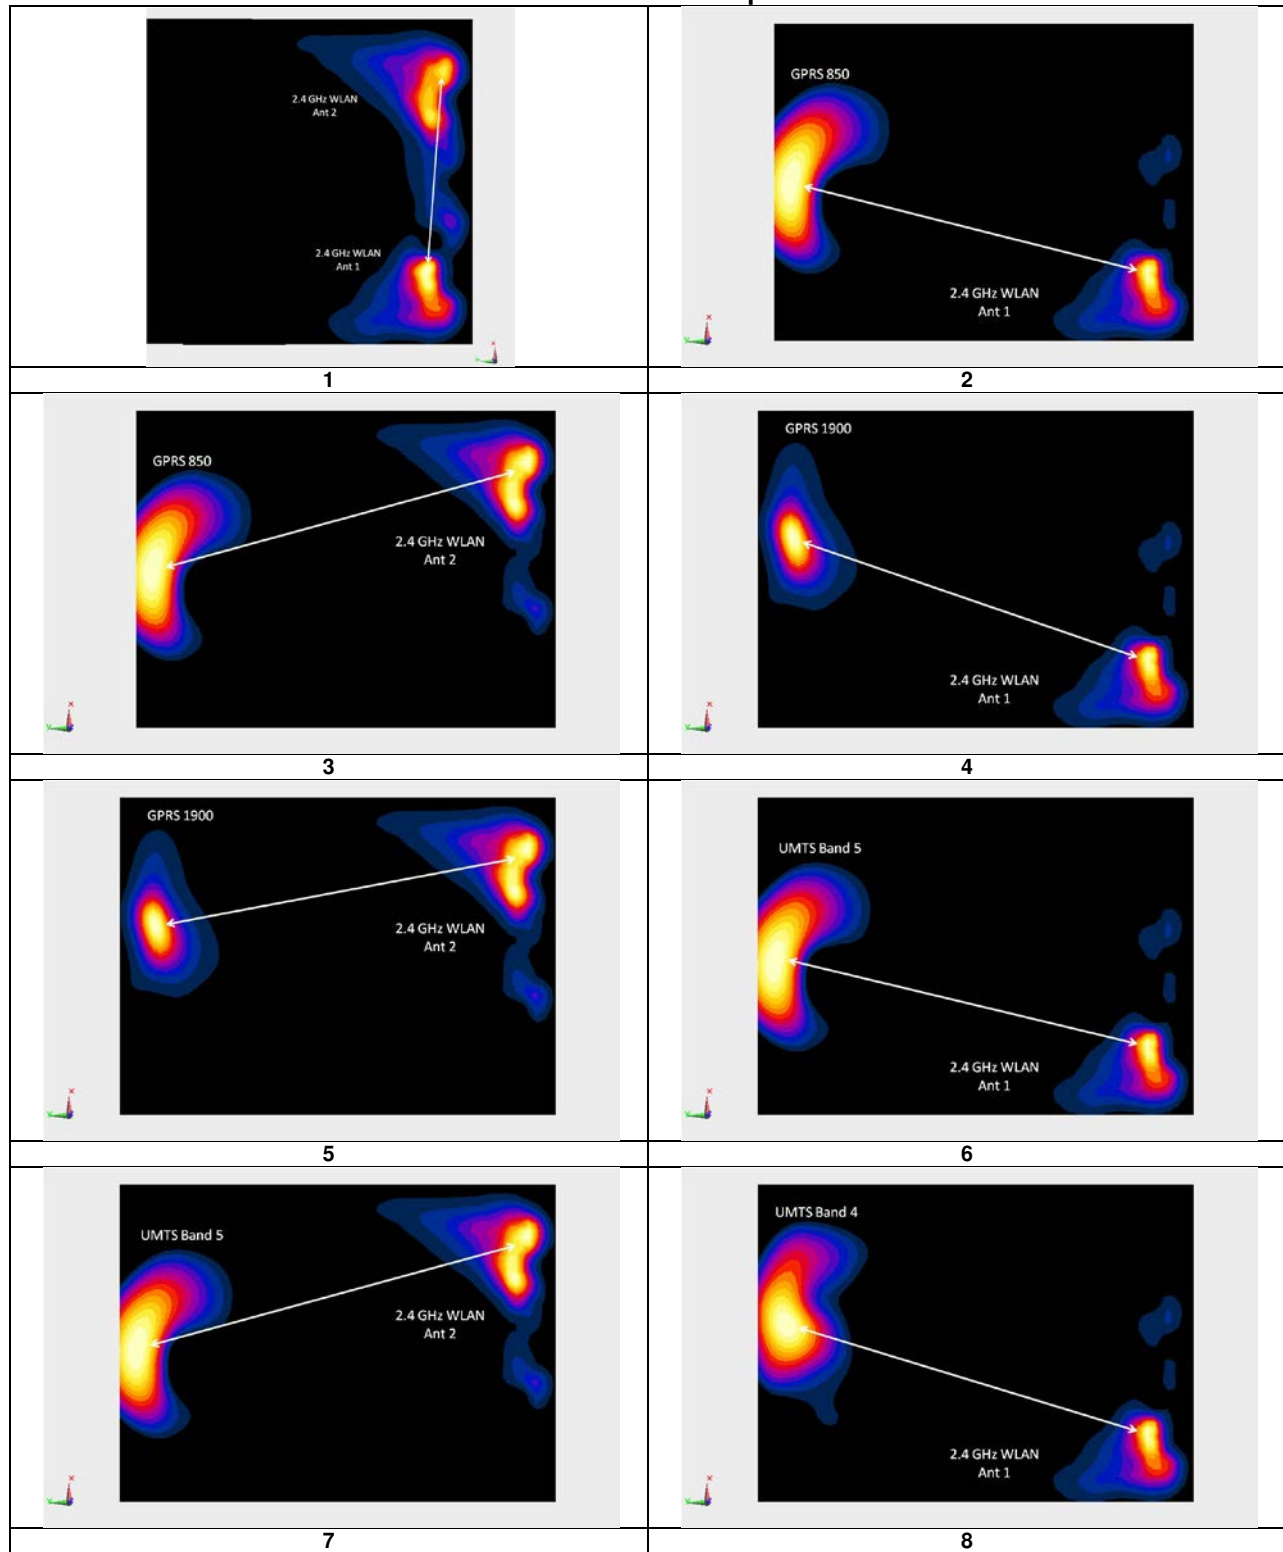


FCC ID: A3LSMT825	 SAR EVALUATION REPORT 	Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet
© 2017 PCTEST Engineering Laboratory, Inc.		Page 61 of 71


REV 18.2 M
11/28/2016

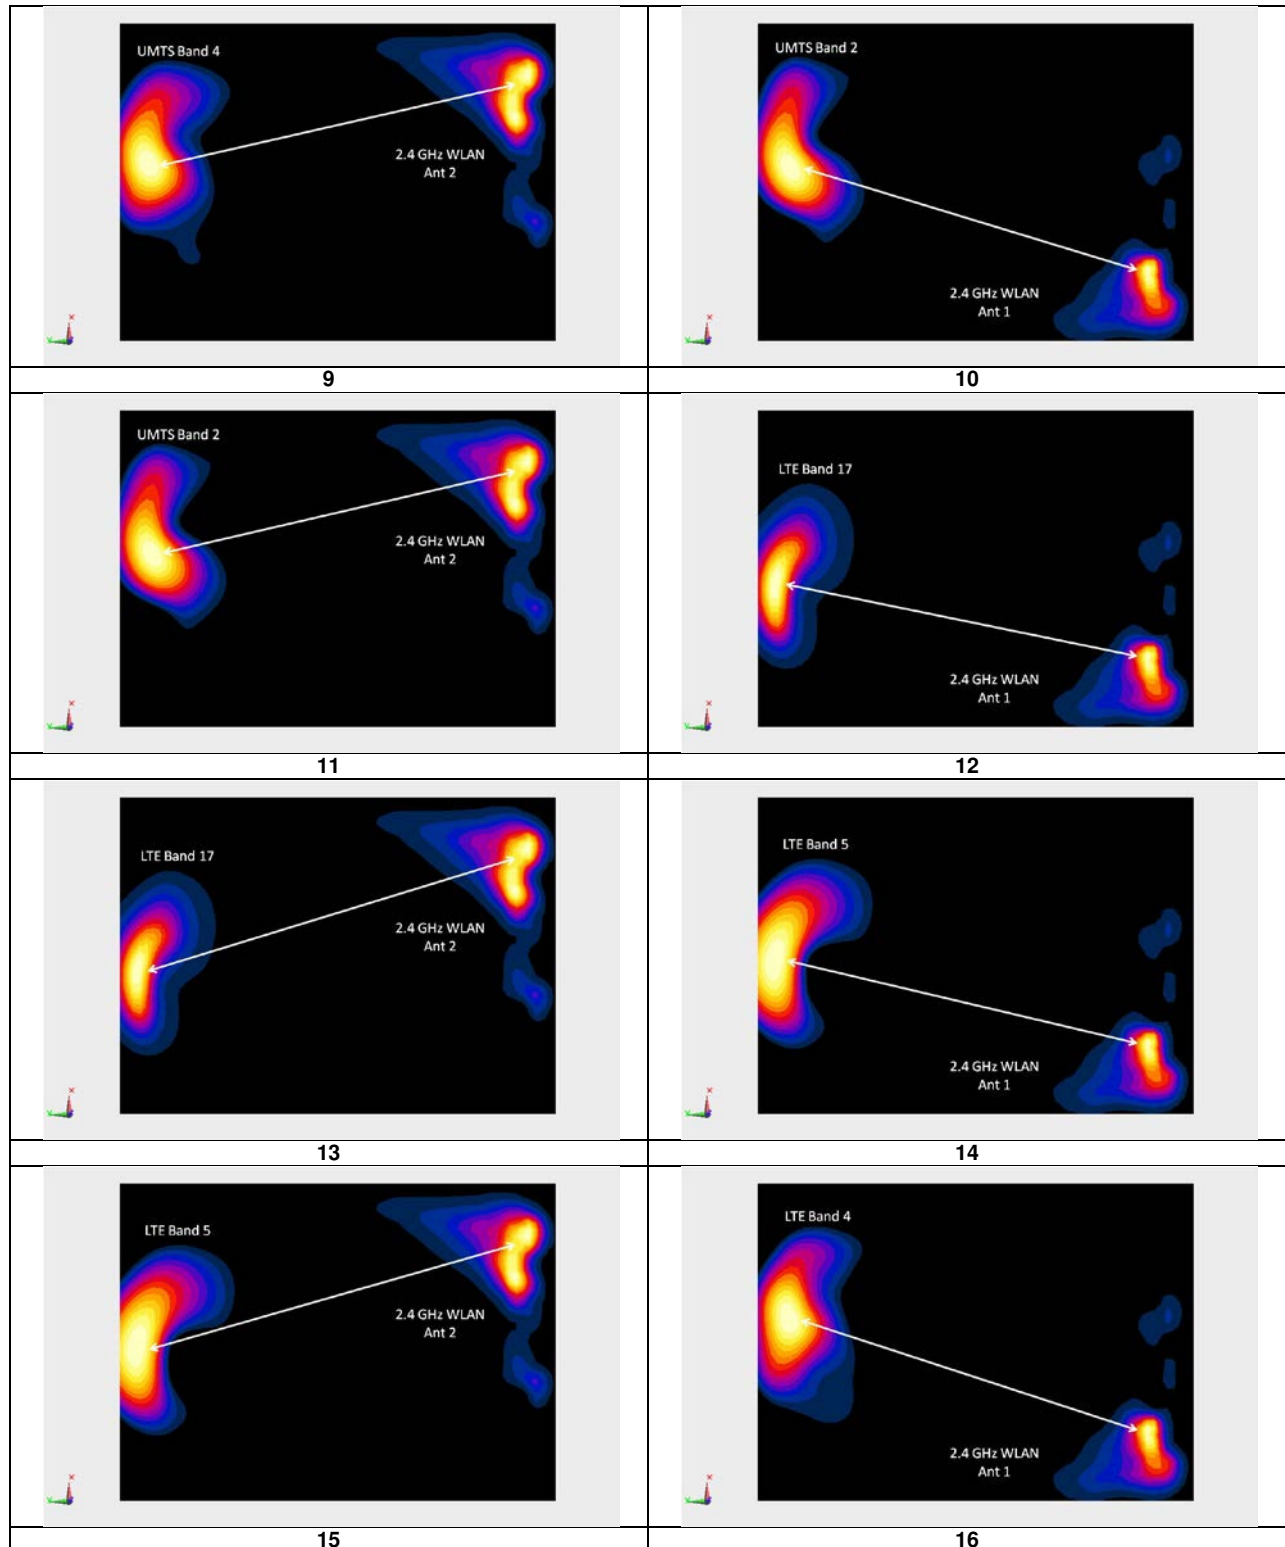


FCC ID: A3LSMT825			SAR EVALUATION REPORT 	Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet	Page 62 of 71	

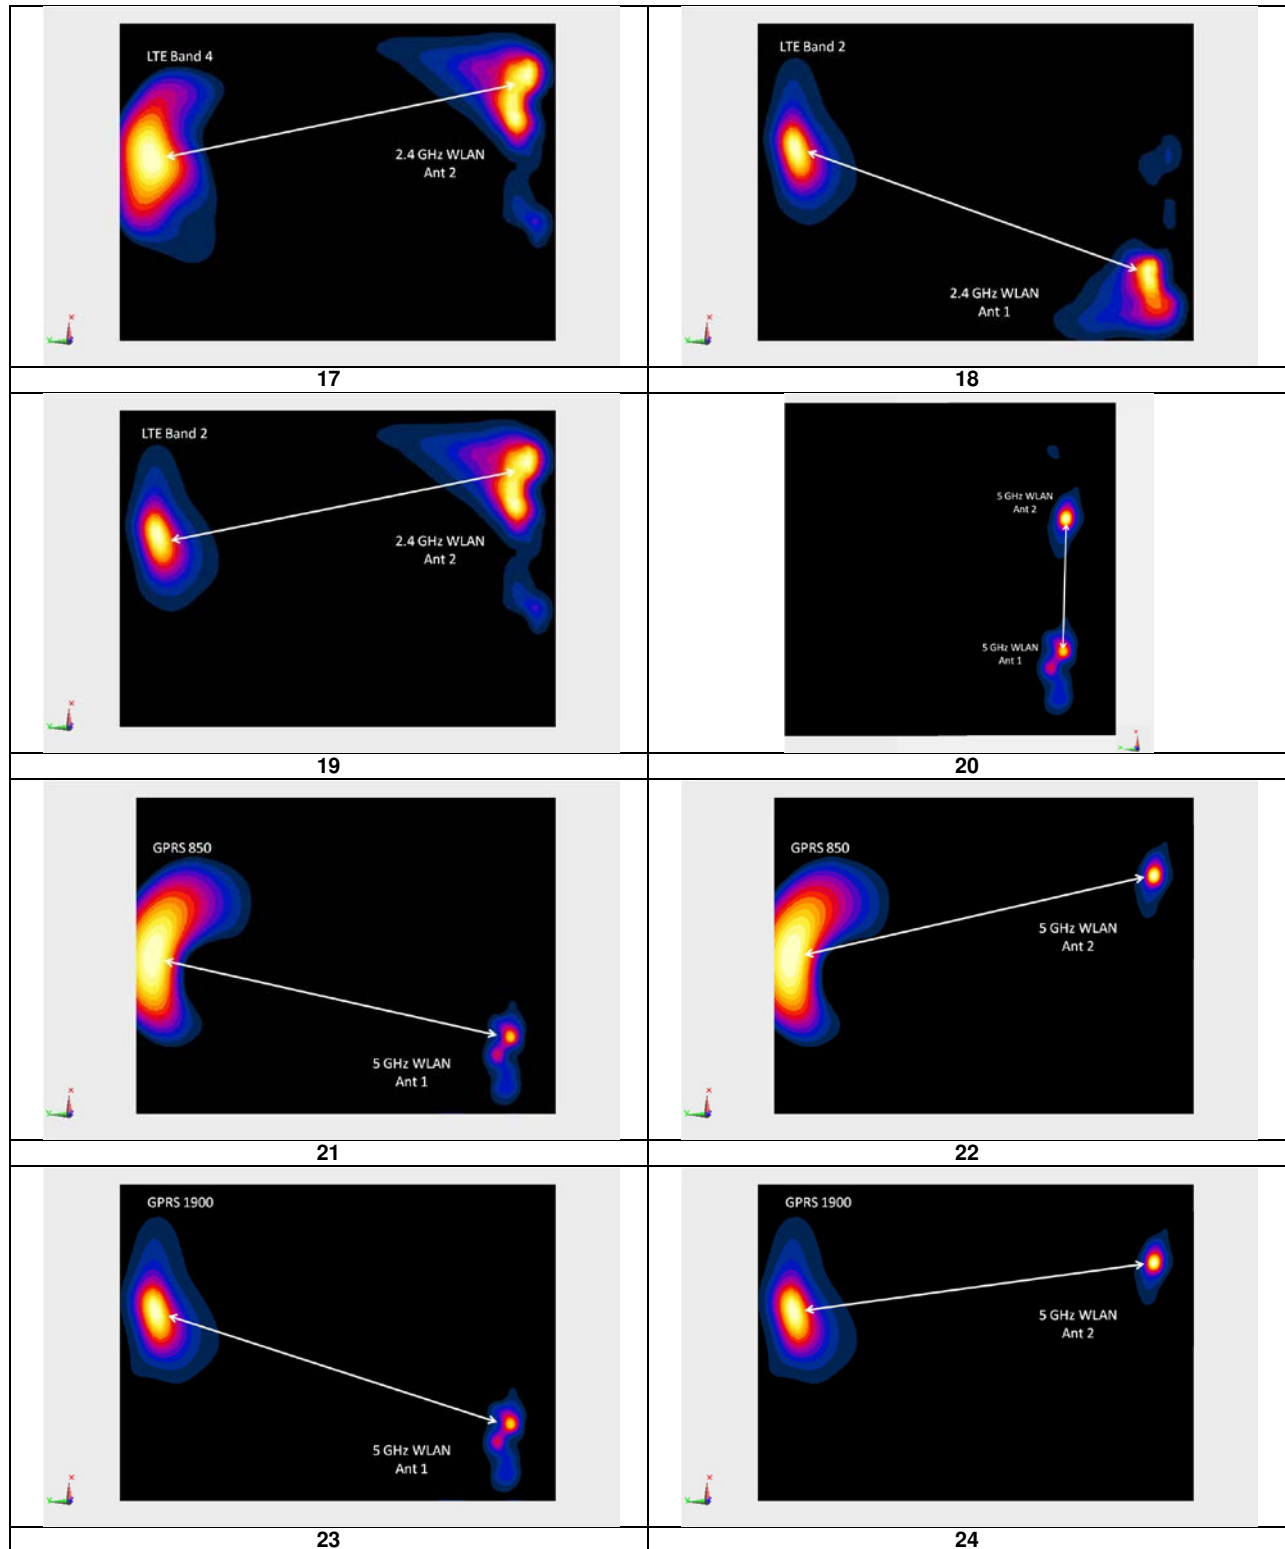

FCC ID: A3LSMT825	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet	Page 63 of 71

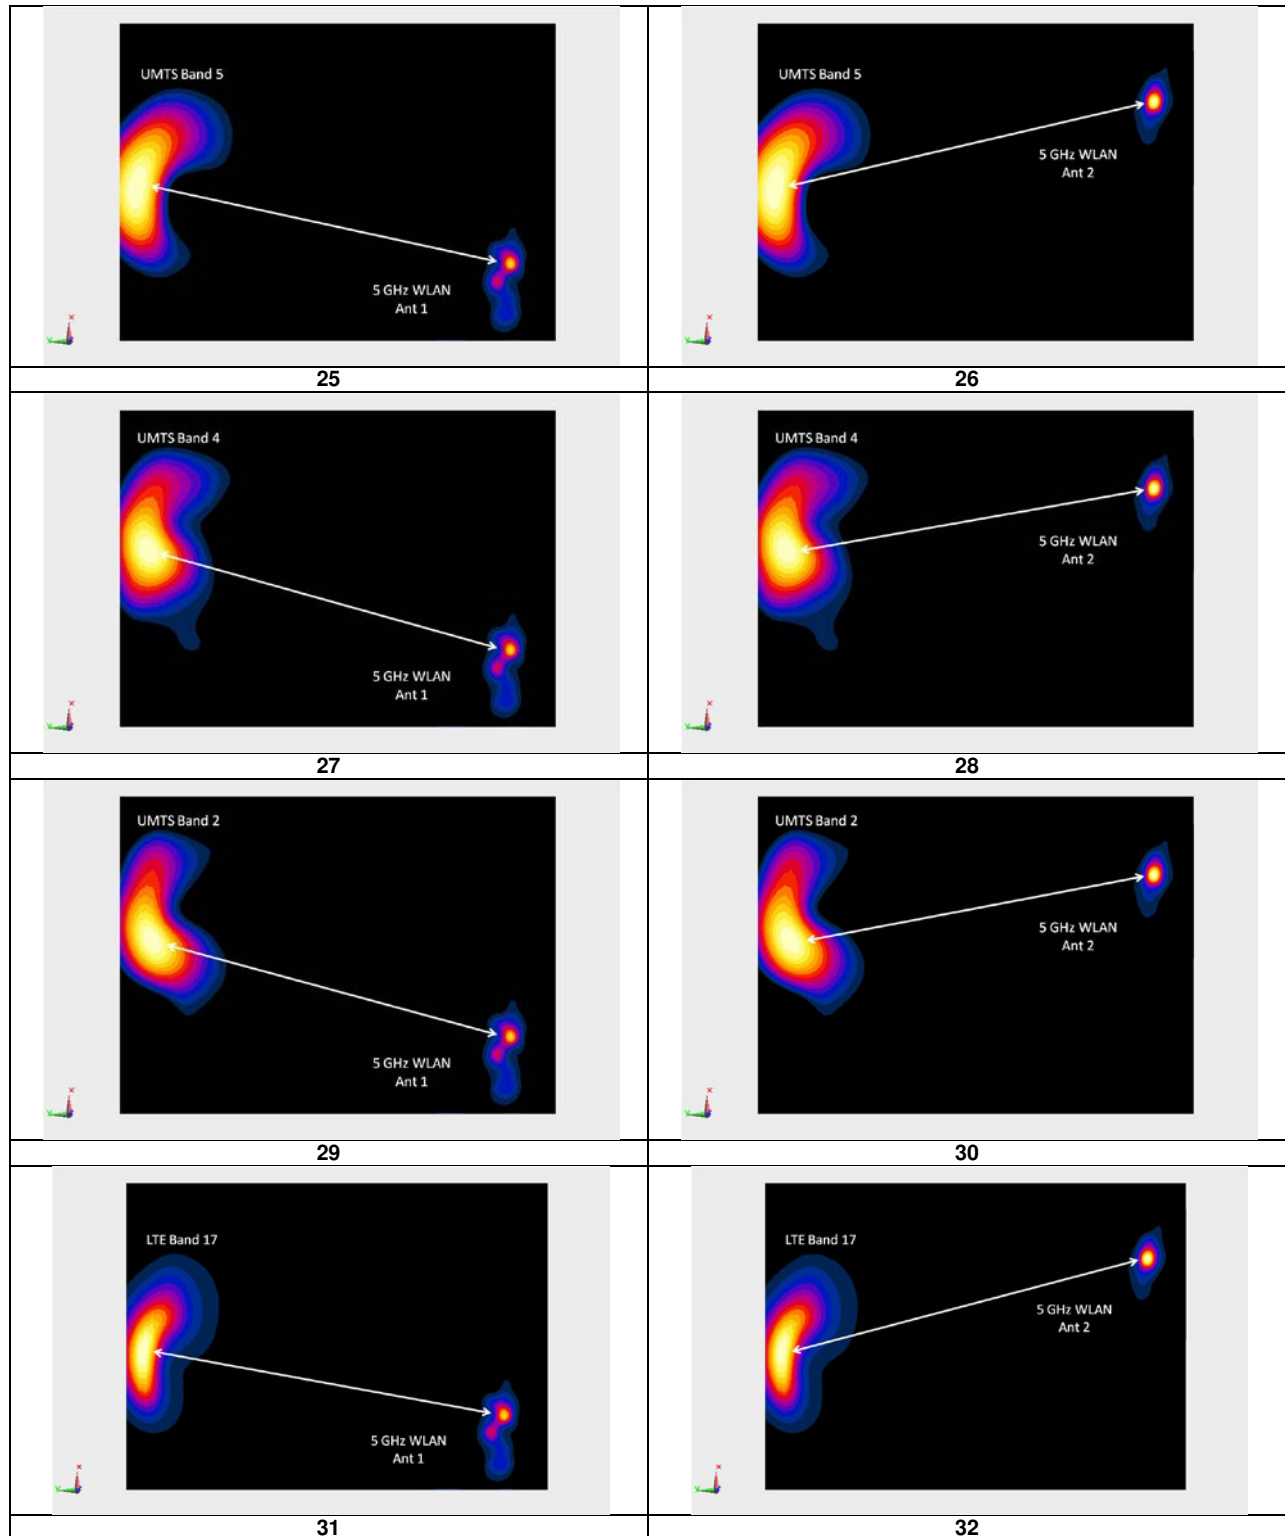

FCC ID: A3LSMT825	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet	Page 64 of 71

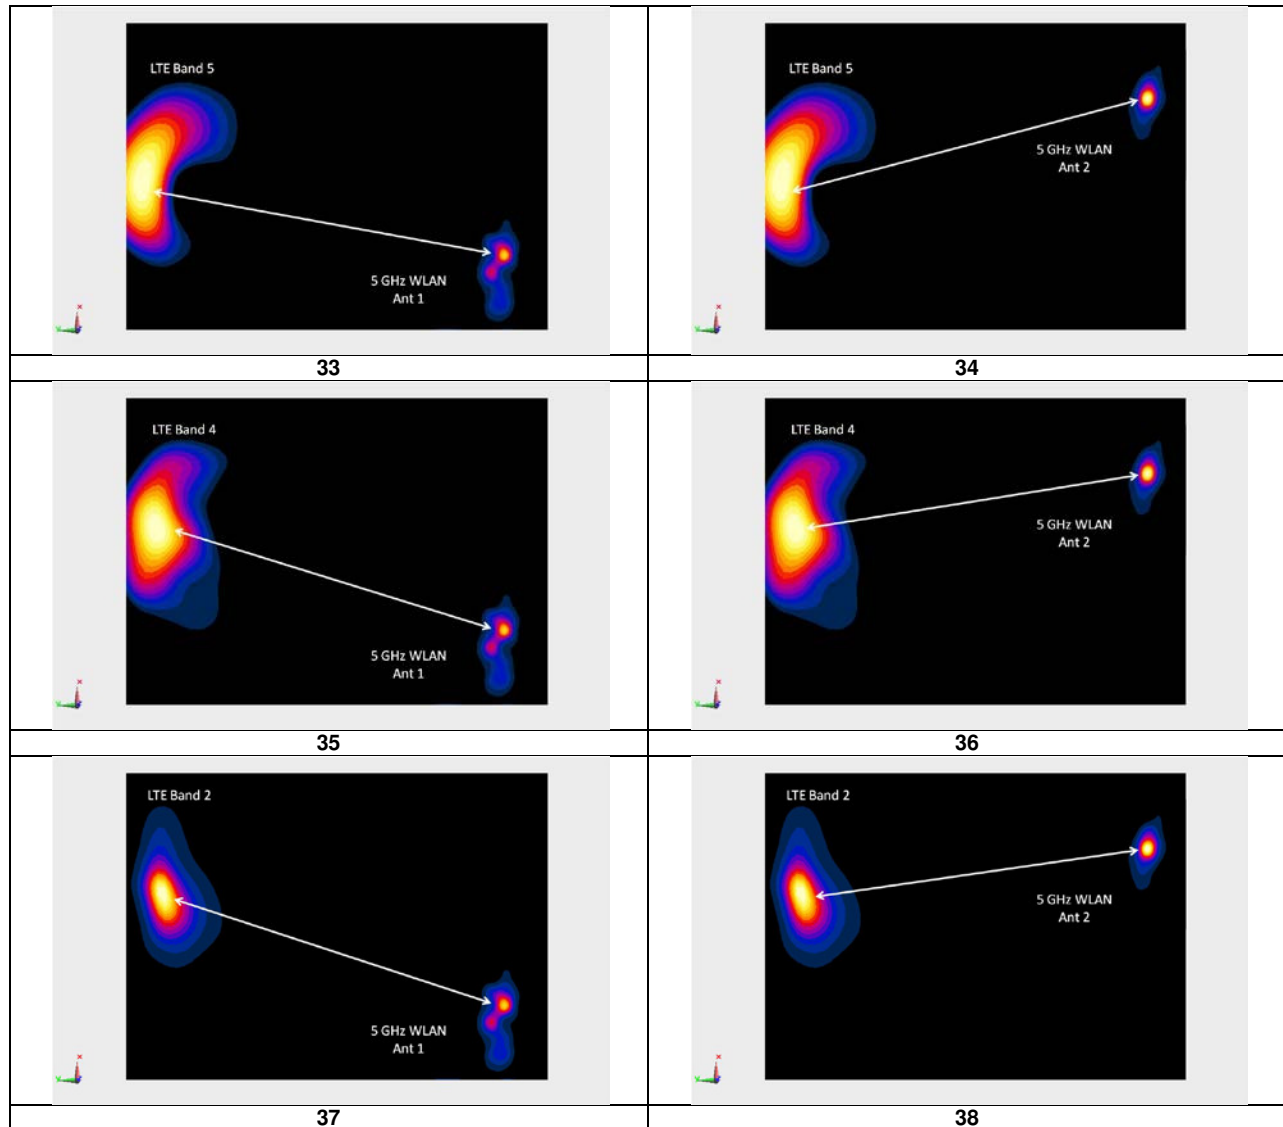

11.5 Simultaneous Transmission Conclusion

The above numerical summed SAR results and SPLSR analysis are sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528- 2013 Section 6.3.4.1.

FCC ID: A3LSMT825	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet	Page 65 of 71

12 SAR MEASUREMENT VARIABILITY

12.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

Table 12-1
Body SAR Measurement Variability Results

BODY VARIABILITY RESULTS															
Band	FREQUENCY		Mode	Service	# of Time Slots	Data Rate (Mbps)	Side	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.							(W/kg)	(W/kg)		(W/kg)		(W/kg)	
750	710.00	23790	LTE Band 17, 10 MHz Bandwidth	QPSK, 50 RB, 0 RB Offset	N/A	N/A	back	0 mm	0.891	0.899	1.01	N/A	N/A	N/A	N/A
835	836.60	190	GSM 850	GPRS	3	N/A	back	13 mm	1.030	0.967	1.07	N/A	N/A	N/A	N/A
1750	1732.50	20175	LTE Band 4 (AWS), 20 MHz Bandwidth	QPSK, 1 RB, 0 RB Offset	N/A	N/A	back	13 mm	0.982	0.914	1.07	N/A	N/A	N/A	N/A
1900	1850.20	512	GSM 1900	GPRS	4	N/A	back	0 mm	0.930	0.918	1.01	N/A	N/A	N/A	N/A
2450	2437.00	6	802.11b, 22 MHz Bandwidth	DSSS, ANT 1	N/A	1	back	0 mm	0.855	0.847	1.01	N/A	N/A	N/A	N/A
5250	5290.00	58	802.11ac, 80 MHz Bandwidth	OFDM, ANT 2	N/A	29.3	back	0 mm	0.814	0.813	1.00	N/A	N/A	N/A	N/A
5600	5530.00	106	802.11ac, 80 MHz Bandwidth	OFDM, ANT 1	N/A	29.3	back	0 mm	0.893	0.900	1.01	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Body 1.6 W/kg (mW/g) averaged over 1 gram									

12.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

FCC ID: A3LSMT825	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet	Page 66 of 71

13 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8594A	(9kHz-2.9GHz) Spectrum Analyzer	N/A	N/A	N/A	3051A00187
Agilent	8753E	(30kHz-6GHz) Network Analyzer	3/2/2016	Annual	3/2/2017	JP38020182
Agilent	8753ES	S-Parameter Network Analyzer	6/28/2016	Annual	6/28/2017	MY40000670
Agilent	8753ES	S-Parameter Vector Network Analyzer	8/19/2016	Annual	8/19/2017	MY40003841
Agilent	8753ES	S-Parameter Network Analyzer	10/26/2016	Annual	10/26/2017	US39170118
Agilent	E4432B	ESG-D Series Signal Generator	3/5/2016	Annual	3/5/2017	US40053896
Agilent	E4438C	ESG Vector Signal Generator	3/13/2015	Biennial	3/13/2017	MY42082385
Agilent	E5515C	Wireless Communications Test Set	6/18/2015	Biennial	6/18/2017	GB41450275
Agilent	E5515C	Wireless Communications Test Set	10/23/2015	Biennial	10/23/2017	GB43193563
Agilent	E8257D	(250kHz-20GHz) Signal Generator	3/2/2016	Annual	3/2/2017	MY45470194
Agilent	N4010A	Wireless Connectivity Test Set	N/A	N/A	N/A	GB46170464
Agilent	N5182A	MXG Vector Signal Generator	10/27/2016	Annual	10/27/2017	MY47420603
Agilent	N9020A	MXA Signal Analyzer	10/28/2016	Annual	10/28/2017	US46470561
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433971
Anritsu	MA24106A	USB Power Sensor	6/2/2016	Annual	6/2/2017	1231535
Anritsu	MA24106A	USB Power Sensor	6/2/2016	Annual	6/2/2017	1231538
Anritsu	MA2411B	Pulse Power Sensor	8/18/2016	Annual	8/18/2017	1126066
Anritsu	MA2411B	Pulse Power Sensor	8/18/2016	Annual	8/18/2017	1207470
Anritsu	ML2495A	Power Meter	10/16/2015	Biennial	10/16/2017	941001
Anritsu	ML2495A	Power Meter	10/16/2015	Biennial	10/16/2017	1039008
Anritsu	MT8820C	Radio Communication Analyzer	9/15/2016	Annual	9/15/2017	6200901190
Anritsu	MT8820C	Radio Communication Analyzer	11/4/2016	Annual	11/4/2017	6201144418
COMTech	AR85729-5	Solid State Amplifier	CBT	N/A	CBT	M155A00-009
Control Company	4040	Digital Thermometer	3/18/2015	Biennial	3/18/2017	150194895
Control Company	4352	Ultra Long Stem Thermometer	3/8/2016	Biennial	3/8/2018	160261694
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
MiniCircuits	SLP-2400+	Low Pass Filter	CBT	N/A	CBT	R8979500903
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Mitutoyo	CD-6°CSX	Digital Caliper	3/2/2016	Biennial	3/2/2018	13264162
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	BW-S3W2	Attenuator (3dB)	CBT	N/A	CBT	120
Pasternack	NC-100	Torque Wrench	11/6/2015	Biennial	11/6/2017	N/A
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Rohde & Schwarz	CMU200	Base Station Simulator	3/29/2016	Annual	3/29/2017	836371/0079
Rohde & Schwarz	CMW500	Radio Communication Tester	10/20/2016	Annual	10/20/2017	100976
Rohde & Schwarz	CMW500	Radio Communication Tester	4/13/2016	Annual	4/13/2017	140148
Seekonk	NC-100	Torque Wrench (8" lb)	9/1/2016	Biennial	9/1/2018	21053
SPEAG	D750V3	750 MHz SAR Dipole	7/13/2016	Annual	7/13/2017	1161
SPEAG	D835V2	835 MHz SAR Dipole	7/13/2016	Annual	7/13/2017	4d047
SPEAG	D1750V2	1750 MHz SAR Dipole	7/14/2016	Annual	7/14/2017	1150
SPEAG	D1900V2	1900 MHz SAR Dipole	7/8/2016	Annual	7/8/2017	5d080
SPEAG	D2450V2	2450 MHz SAR Dipole	8/18/2016	Annual	8/18/2017	719
SPEAG	D2450V2	2450 MHz SAR Dipole	9/13/2016	Annual	9/13/2017	797
SPEAG	D5GHzV2	5 GHz SAR Dipole	8/2/2016	Annual	8/2/2017	1237
SPEAG	DAE4	Dasy Data Acquisition Electronics	5/11/2016	Annual	5/11/2017	859
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/18/2016	Annual	2/18/2017	1272
SPEAG	DAE4	Dasy Data Acquisition Electronics	7/12/2016	Annual	7/12/2017	1322
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/14/2016	Annual	3/14/2017	1368
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/15/2016	Annual	1/15/2017	1466
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/10/2016	Annual	5/10/2017	1070
SPEAG	ES3DV2	SAR Probe	7/19/2016	Annual	7/19/2017	3022
SPEAG	ES3DV3	SAR Probe	3/18/2016	Annual	3/18/2017	3319
SPEAG	EX3DV4	SAR Probe	2/22/2016	Annual	2/22/2017	3914
SPEAG	EX3DV4	SAR Probe	5/17/2016	Annual	5/17/2017	7409
SPEAG	EX3DV4	SAR Probe	7/25/2016	Annual	7/25/2017	7410

Note:

1. CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.
2. Each equipment was used solely within its calibration period.

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 67 of 71

14 MEASUREMENT UNCERTAINTIES

a	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System								
Probe Calibration	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	2.0	R	1.73	1.0	1.0	1.2	1.2	∞
Linearity	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	0.25	R	1.73	1.0	1.0	0.1	0.1	∞
Readout Electronics	0.3	N	1	1.0	1.0	0.3	0.3	∞
Response Time	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions - Noise	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
RF Ambient Conditions - Reflections	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	6.7	R	1.73	1.0	1.0	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Test Sample Related								
Test Sample Positioning	2.7	N	1	1.0	1.0	2.7	2.7	35
Device Holder Uncertainty	1.67	N	1	1.0	1.0	1.7	1.7	5
Output Power Variation - SAR drift measurement	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
SAR Scaling	0.0	R	1.73	1.0	1.0	0.0	0.0	∞
Phantom & Tissue Parameters								
Phantom Uncertainty (Shape & Thickness tolerances)	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	4.2	N	1	0.78	0.71	3.3	3.0	10
Liquid Permittivity - measurement uncertainty	4.1	N	1	0.23	0.26	1.0	1.1	10
Liquid Conductivity - Temperature Uncertainty	3.4	R	1.73	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	0.6	R	1.73	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)	RSS					11.5	11.3	60
Expanded Uncertainty (95% CONFIDENCE LEVEL)	k=2					23.0	22.6	

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 68 of 71

15 CONCLUSION

15.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: A3LSMT825		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet		Page 69 of 71

16 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID: A3LSMT825	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet	Page 70 of 71

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: A3LSMT825	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 0Y1612131940.A3L	Test Dates: 12/12/16 - 01/24/17	DUT Type: Portable Tablet	Page 71 of 71

APPENDIX A: SAR TEST DATA

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT825; Type: Portable Tablet; Serial: 09999

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.76

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.998 \text{ S/m}$; $\epsilon_r = 55.18$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.3 cm

Test Date: 12-15-2016; Ambient Temp: 21.6°C; Tissue Temp: 20.6°C

Probe: ES3DV3 - SN3319; ConvF(6.04, 6.04, 6.04); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GPRS 850, Body SAR, Back Side, Mid.ch, 3 Tx Slots


Area Scan (11x17x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 33.91 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 1.03 W/kg

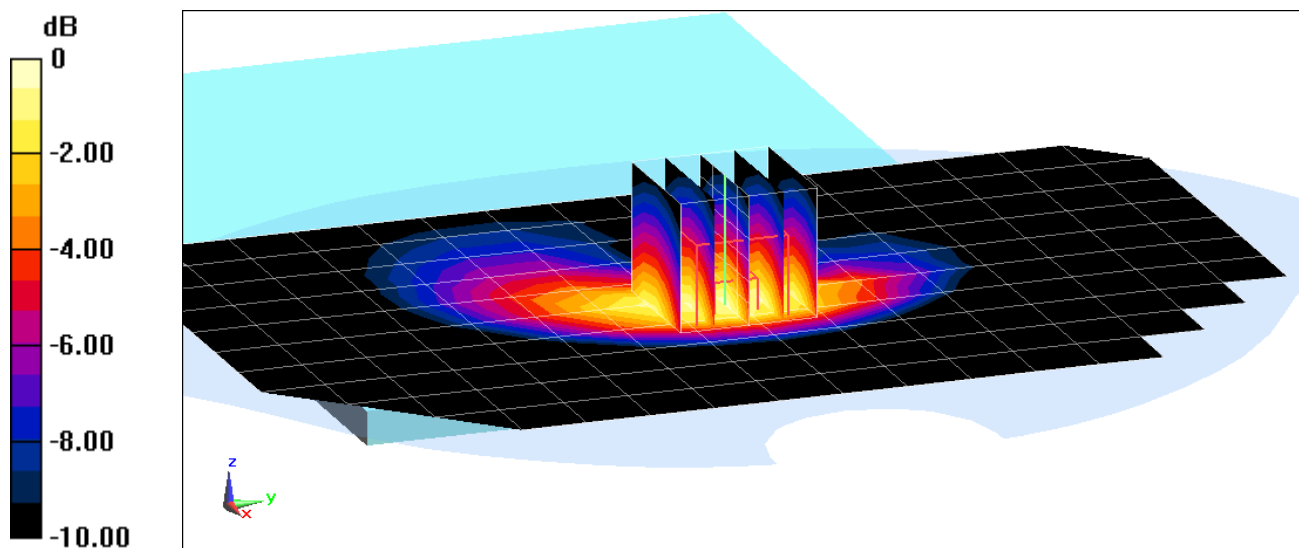

0 dB = 1.22 W/kg = 0.86 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT825; Type: Portable Tablet; Serial: 09999

Communication System: UID 0, GSM GPRS; 4 Tx slots; Frequency: 1850.2 MHz; Duty Cycle: 1:2.076
Medium: 1900 Body; Medium parameters used (interpolated):
 $f = 1850.2 \text{ MHz}$; $\sigma = 1.522 \text{ S/m}$; $\epsilon_r = 52.165$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 0.0 cm

Test Date: 12-14-2016; Ambient Temp: 23.1°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7409; ConvF(7.47, 7.47, 7.47); Calibrated: 5/17/2016;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn859; Calibrated: 5/11/2016
Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GPRS 1900, Body SAR, Back Side, Low.ch, 4 Tx Slots


Area Scan (10x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.74 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 2.08 W/kg

SAR(1 g) = 0.930 W/kg

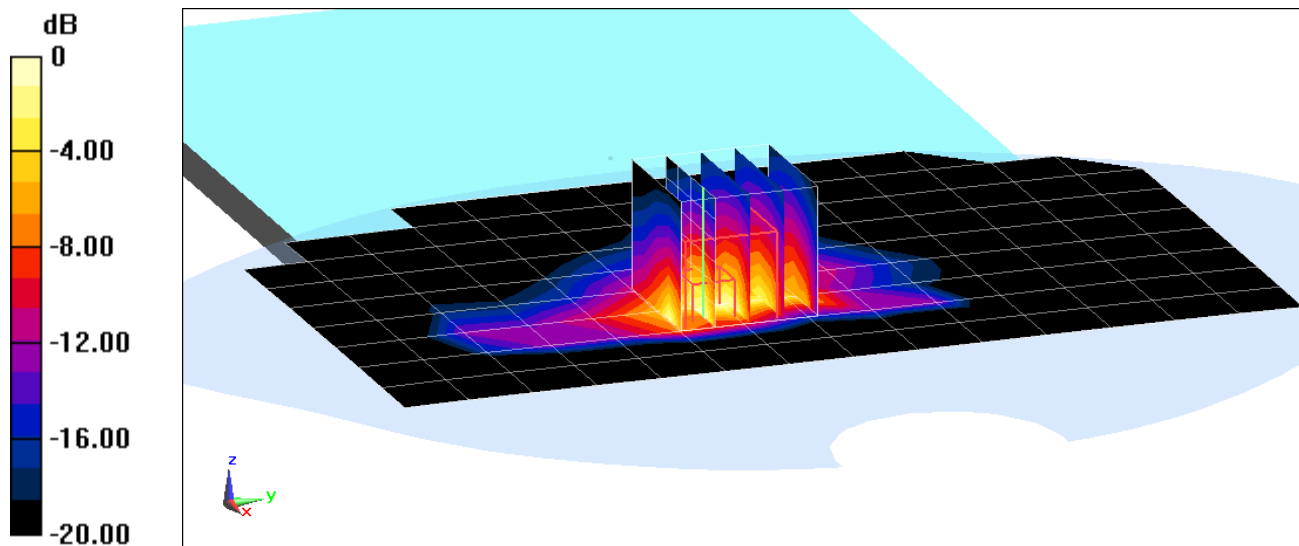

0 dB = 1.56 W/kg = 1.93 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT825; Type: Portable Tablet; Serial: 09999

Communication System: UID 0, UMTS; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 846.6 \text{ MHz}$; $\sigma = 1.006 \text{ S/m}$; $\epsilon_r = 53.957$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 12-12-2016; Ambient Temp: 21.2°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3319; ConvF(6.04, 6.04, 6.04); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 850, Body SAR, Top Edge, High.ch


Area Scan (10x13x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 29.98 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 0.763 W/kg

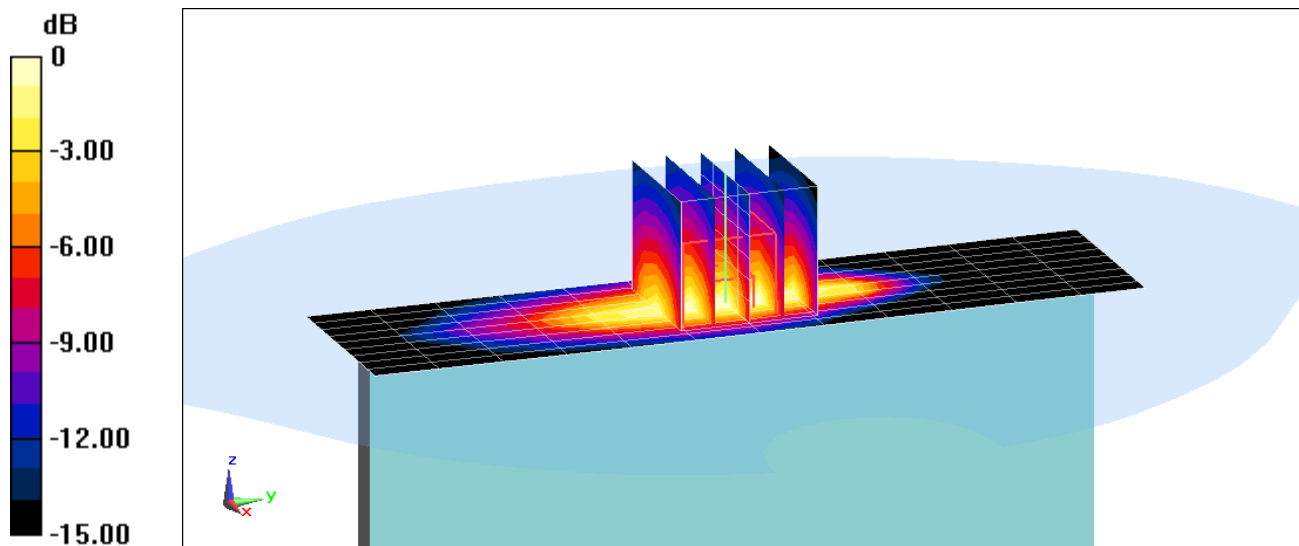

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT825; Type: Portable Tablet; Serial: 09999

Communication System: UID 0, UMTS; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used (interpolated):

$f = 1712.4 \text{ MHz}$; $\sigma = 1.436 \text{ S/m}$; $\epsilon_r = 52.375$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.3 cm

Test Date: 12-13-2016; Ambient Temp: 24.5°C; Tissue Temp: 22.5°C

Probe: ES3DV2 - SN3022; ConvF(4.78, 4.78, 4.78); Calibrated: 7/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1466; Calibrated: 1/15/2016

Phantom: SAM Main; Type: QD000P40CC; Serial: TP 1114

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 1750, Body SAR, Back Side, Low.ch


Area Scan (11x17x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.18 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.865 W/kg

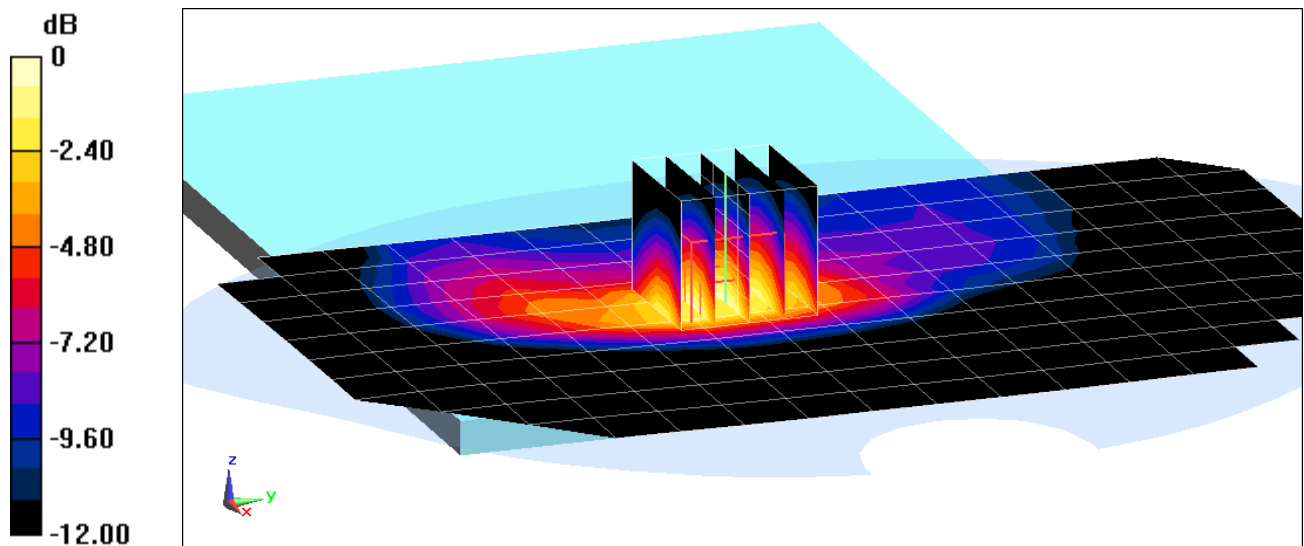

0 dB = 1.04 W/kg = 0.17 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT825; Type: Portable Tablet; Serial: 09999

Communication System: UID 0, UMTS; Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium: 1900 Body; Medium parameters used (interpolated):
 $f = 1907.6 \text{ MHz}$; $\sigma = 1.585 \text{ S/m}$; $\epsilon_r = 52.023$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 0.0 cm

Test Date: 12-14-2016; Ambient Temp: 23.1°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7409; ConvF(7.47, 7.47, 7.47); Calibrated: 5/17/2016;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn859; Calibrated: 5/11/2016
Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 1900, Body SAR, Left Edge, High.ch


Area Scan (11x19x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.34 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.12 W/kg

SAR(1 g) = 0.791 W/kg

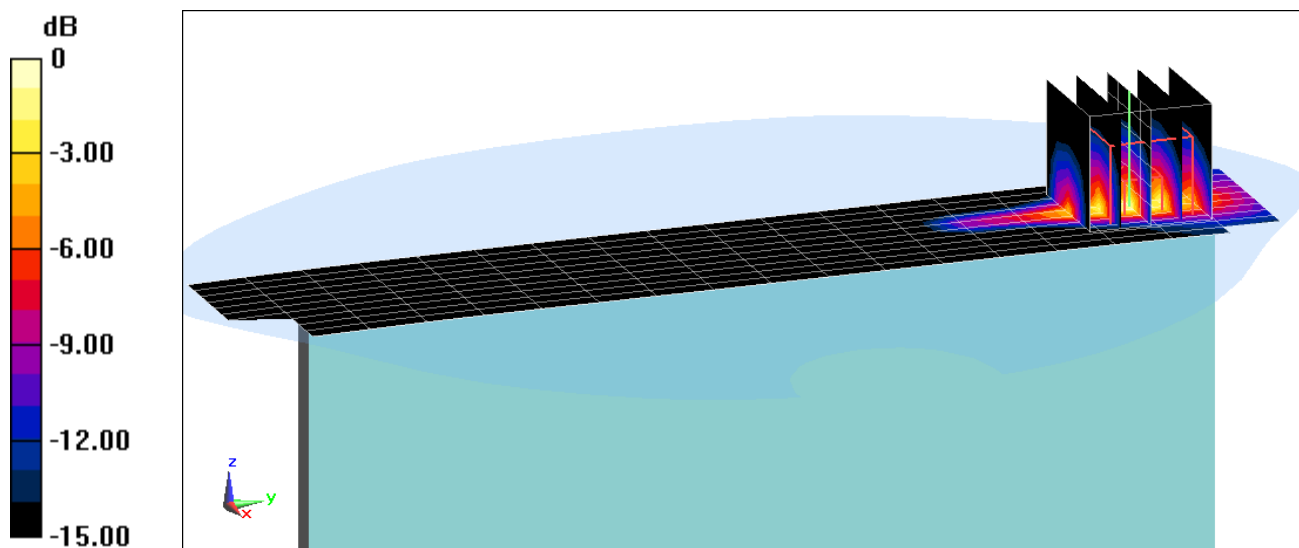

0 dB = 1.73 W/kg = 2.38 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT825; Type: Portable Tablet; Serial: 09999

Communication System: UID 0, LTE Band 17; Frequency: 710 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used:

$f = 710 \text{ MHz}$; $\sigma = 0.928 \text{ S/m}$; $\epsilon_r = 56.219$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 12-13-2016; Ambient Temp: 22.3°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7409; ConvF(9.46, 9.46, 9.46); Calibrated: 5/17/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/11/2016

Phantom: SAM Right; Type: QD000P40CD; Serial: TP:7535

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 17, Body SAR, Back Side, Mid.ch, 10 MHz Bandwidth,
QPSK, 50 RB, 0 RB Offset**


Area Scan (9x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 31.48 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 2.04 W/kg

SAR(1 g) = 0.899 W/kg

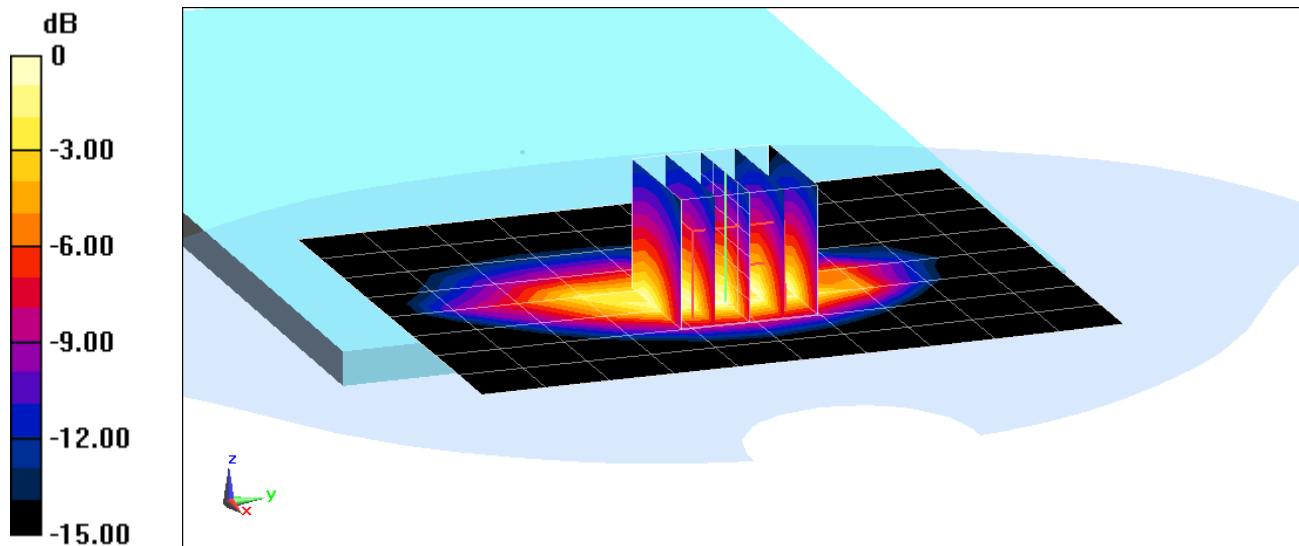

0 dB = 1.30 W/kg = 1.14 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT825; Type: Portable Tablet; Serial: 05286

Communication System: UID 0, LTE Band 5 (Cell.); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: 835 Body; Medium parameters used (interpolated):
 $f = 836.5 \text{ MHz}$; $\sigma = 0.996 \text{ S/m}$; $\epsilon_r = 54.062$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 0.0 cm

Test Date: 12-12-2016; Ambient Temp: 21.2°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3319; ConvF(6.04, 6.04, 6.04); Calibrated: 3/18/2016;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1368; Calibrated: 3/14/2016
Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 5 (Cell.), Body SAR, Top Edge, Mid.ch, 10 MHz Bandwidth,
QPSK, 25 RB, 12 RB Offset**


Area Scan (10x15x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 26.14 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.576 W/kg

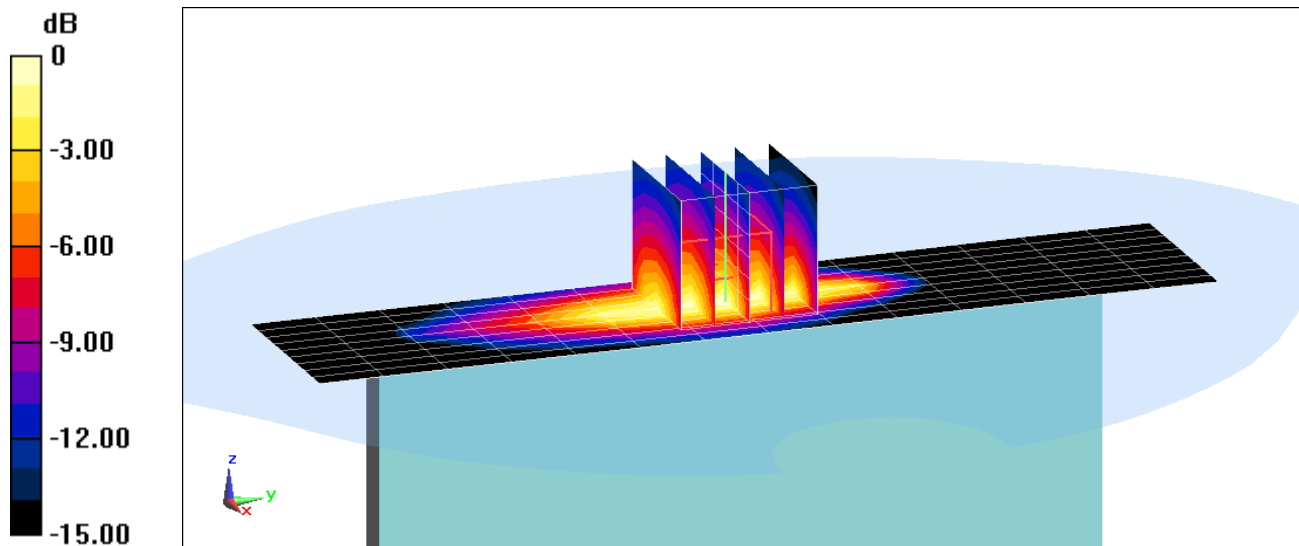

0 dB = 0.779 W/kg = -1.08 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT825; Type: Portable Tablet; Serial: 05260

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used (interpolated):

$f = 1732.5 \text{ MHz}$; $\sigma = 1.46 \text{ S/m}$; $\epsilon_r = 52.286$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.3 cm

Test Date: 12-13-2016; Ambient Temp: 24.5°C; Tissue Temp: 22.5°C

Probe: ES3DV2 - SN3022; ConvF(4.78, 4.78, 4.78); Calibrated: 7/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1466; Calibrated: 1/15/2016

Phantom: SAM Main; Type: QD000P40CC; Serial: TP 1114

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 4 (AWS), Body SAR, Back Side, Mid.ch, 20 MHz Bandwidth,
QPSK, 1 RB, 0 RB Offset**


Area Scan (15x19x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.67 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.982 W/kg

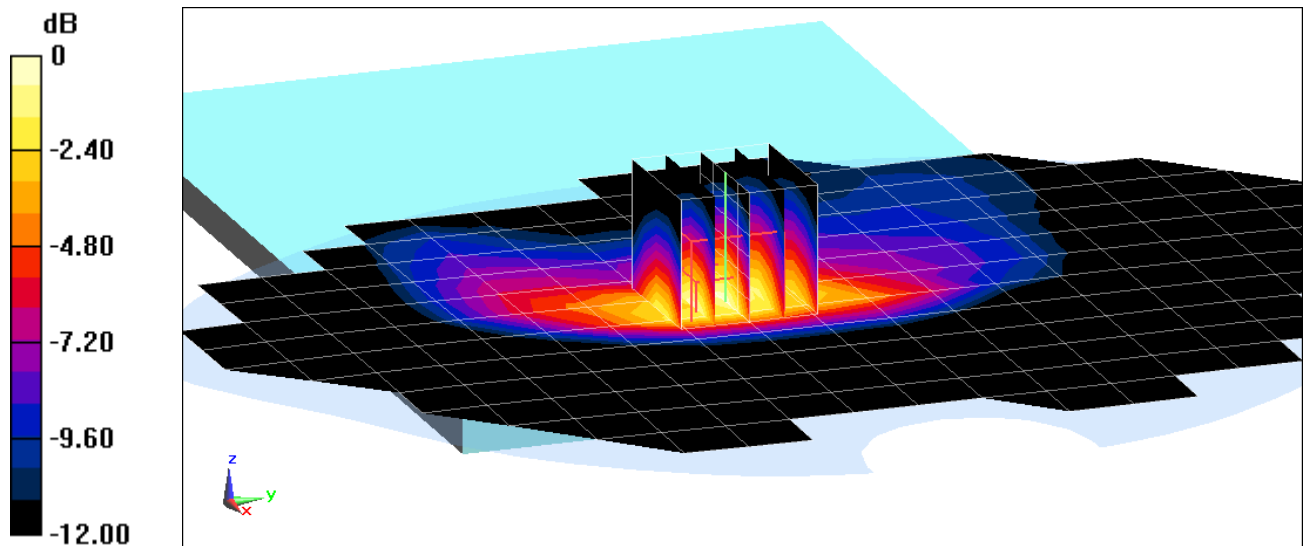

0 dB = 1.17 W/kg = 0.68 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT825; Type: Portable Tablet; Serial: 09999

Communication System: UID 0, LTE Band 2 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1860 \text{ MHz}$; $\sigma = 1.533 \text{ S/m}$; $\epsilon_r = 52.147$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 12-14-2016; Ambient Temp: 23.1°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7409; ConvF(7.47, 7.47, 7.47); Calibrated: 5/17/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/11/2016

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 2 (PCS), Body SAR, Back Side, Low.ch, 20 MHz Bandwidth,
QPSK, 1 RB, 0 RB Offset**


Area Scan (15x19x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.53 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.685 W/kg

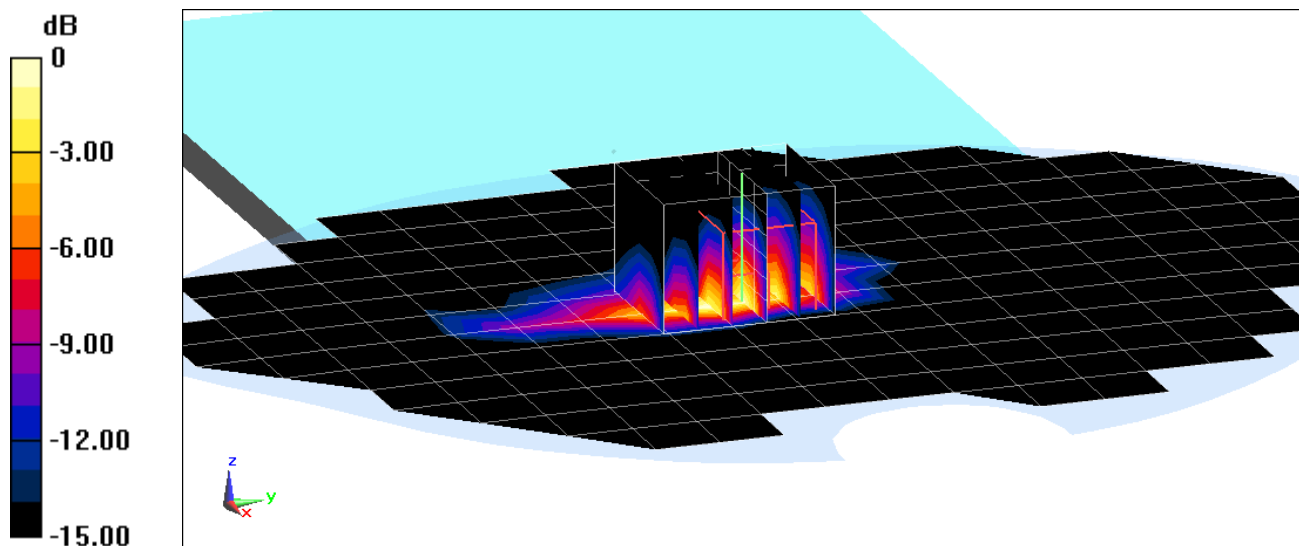

0 dB = 1.23 W/kg = 0.90 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT825; Type: Portable Tablet; Serial: 05260

Communication System: UID 0, IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$; $\sigma = 1.998 \text{ S/m}$; $\epsilon_r = 51.907$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 01-24-2017; Ambient Temp: 22.4°C; Tissue Temp: 22.7°C

Probe: ES3DV3 - SN3319; ConvF(4.2, 4.2, 4.2); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11b, Antenna 1, 22 MHz Bandwidth, Body SAR,
Back Side, Ch 6, 1 Mbps**


Area Scan (9x21x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.46 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 2.36 W/kg

SAR(1 g) = 0.855 W/kg

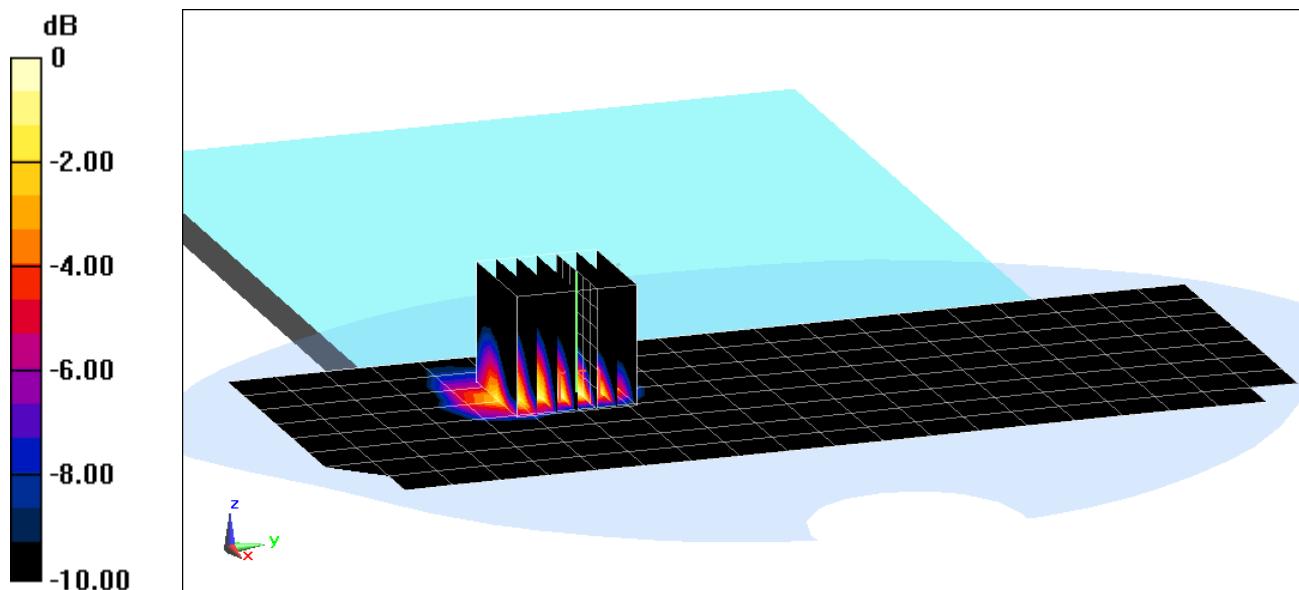

0 dB = 1.14 W/kg = 0.57 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT825; Type: Portable Tablet; Serial: 05211

Communication System: UID 0, IEEE 802.11ac; Frequency: 5530 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used (interpolated):

$f = 5530 \text{ MHz}$; $\sigma = 5.877 \text{ S/m}$; $\epsilon_r = 46.563$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 12-26-2016; Ambient Temp: 20.9°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN3914; ConvF(3.63, 3.63, 3.63); Calibrated: 2/22/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/18/2016

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11ac, Antenna 1, U-NII-2C, 80 MHz Bandwidth, Body SAR,
Back Side, Ch 106, 29.3 Mbps**


Area Scan (14x22x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (9x11x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 10.38 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 7.29 W/kg

SAR(1 g) = 0.900 W/kg

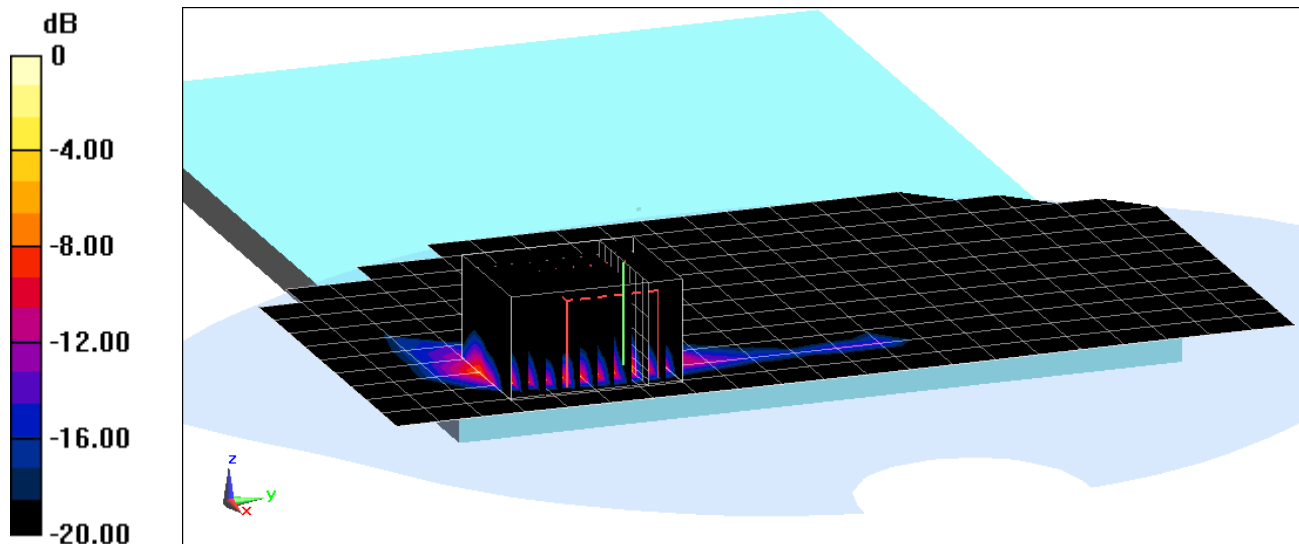

0 dB = 4.26 W/kg = 6.29 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT825; Type: Portable Tablet; Serial: 05260

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.293

Medium: 2450 Body; Medium parameters used (interpolated):

$f = 2441 \text{ MHz}$; $\sigma = 1.958 \text{ S/m}$; $\epsilon_r = 52.191$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 12-12-2016; Ambient Temp: 24.0°C; Tissue Temp: 23.3°C

Probe: EX3DV4 - SN7410; ConvF(7.4, 7.4, 7.4); Calibrated: 7/25/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/12/2016

Phantom: Sub TWIN SAM; Type: QD000P40CC; Serial: TP-1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: Bluetooth, Body SAR, Bottom Edge, Ch 39, 1 Mbps


Area Scan (11x23x1): Measurement grid: $dx=5\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.251 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.195 W/kg

SAR(1 g) = 0.074 W/kg

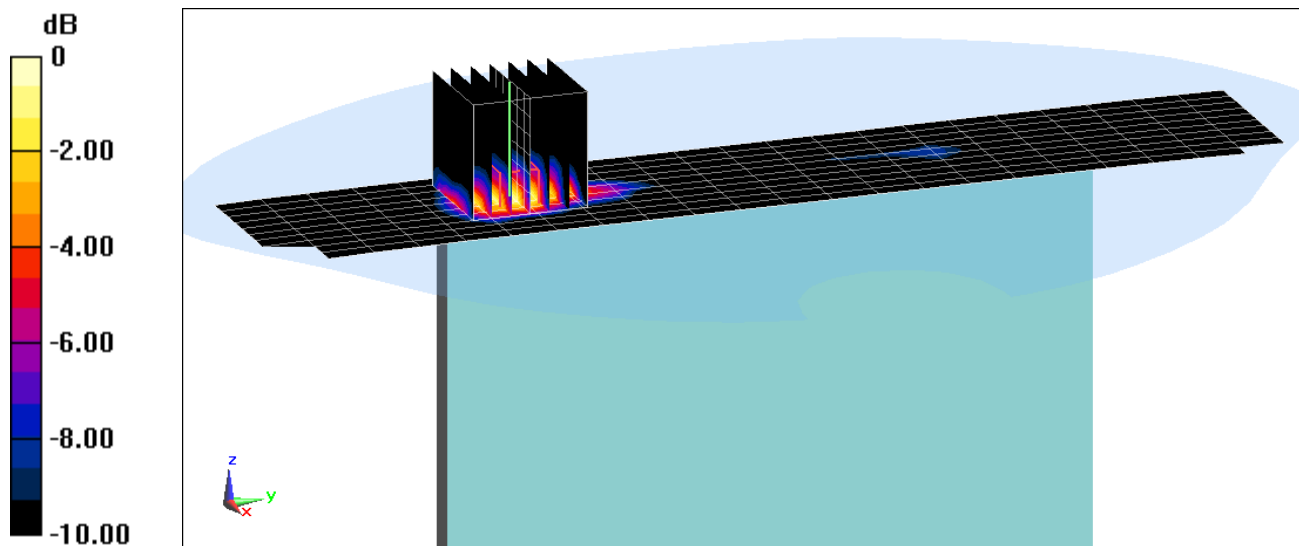

0 dB = 0.139 W/kg = -8.57 dBW/kg

APPENDIX B: SYSTEM VERIFICATION

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1161

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.965 \text{ S/m}$; $\epsilon_r = 55.834$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 12-13-2016; Ambient Temp: 22.3°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7409; ConvF(9.46, 9.46, 9.46); Calibrated: 5/17/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/11/2016

Phantom: SAM Right; Type: QD000P40CD; Serial: TP:7535

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.51 W/kg

SAR(1 g) = 1.66 W/kg

Deviation(1 g) = -1.54%

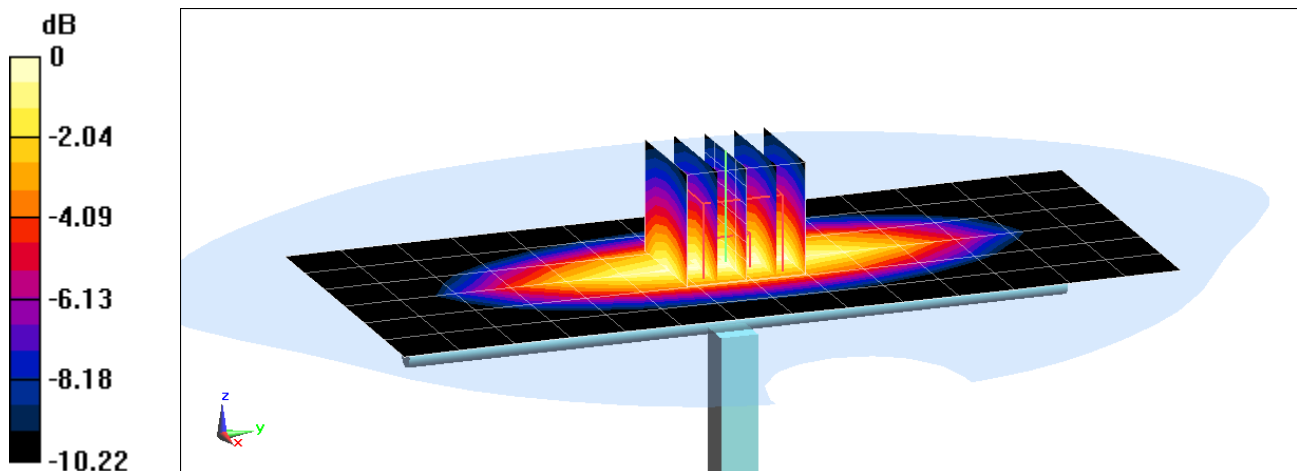

0 dB = 2.22 W/kg = 3.46 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d047

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.995 \text{ S/m}$; $\epsilon_r = 54.078$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 12-12-2016; Ambient Temp: 21.2°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3319; ConvF(6.04, 6.04, 6.04); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 3.05 W/kg

SAR(1 g) = 2.05 W/kg

Deviation(1 g) = 7.11%

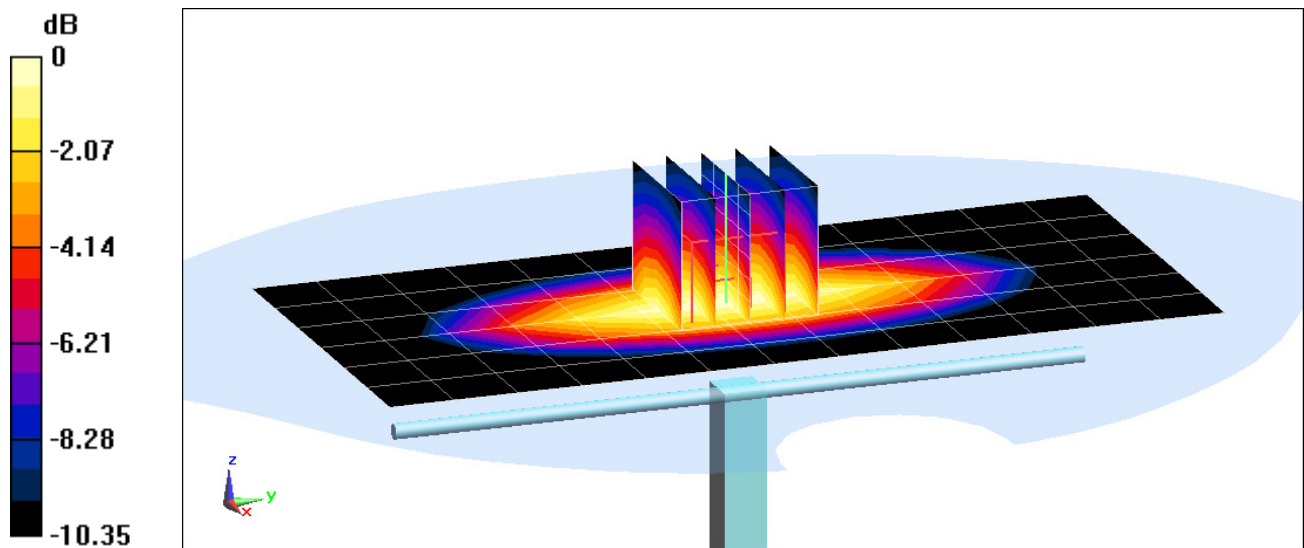

0 dB = 2.40 W/kg = 3.80 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d047

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.996 \text{ S/m}$; $\epsilon_r = 55.195$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 12-15-2016; Ambient Temp: 21.6°C; Tissue Temp: 20.6°C

Probe: ES3DV3 - SN3319; ConvF(6.04, 6.04, 6.04); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 3.00 W/kg

SAR(1 g) = 2.03 W/kg

Deviation(1 g) = 6.06%

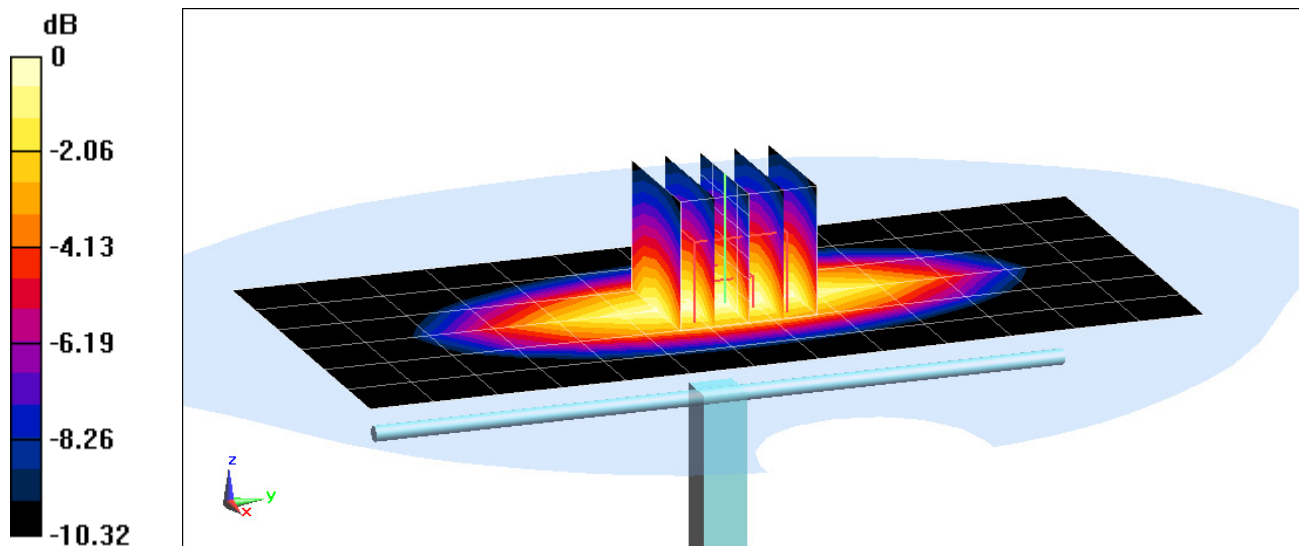

0 dB = 2.38 W/kg = 3.77 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1150

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.481 \text{ S/m}$; $\epsilon_r = 52.208$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 12-13-2016; Ambient Temp: 24.5°C; Tissue Temp: 22.5°C

Probe: ES3DV2 - SN3022; ConvF(4.78, 4.78, 4.78); Calibrated: 7/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1466; Calibrated: 1/15/2016

Phantom: SAM Main; Type: QD000P40CC; Serial: TP 1114

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.44 W/kg

SAR(1 g) = 3.69 W/kg

Deviation(1 g) = 1.10%

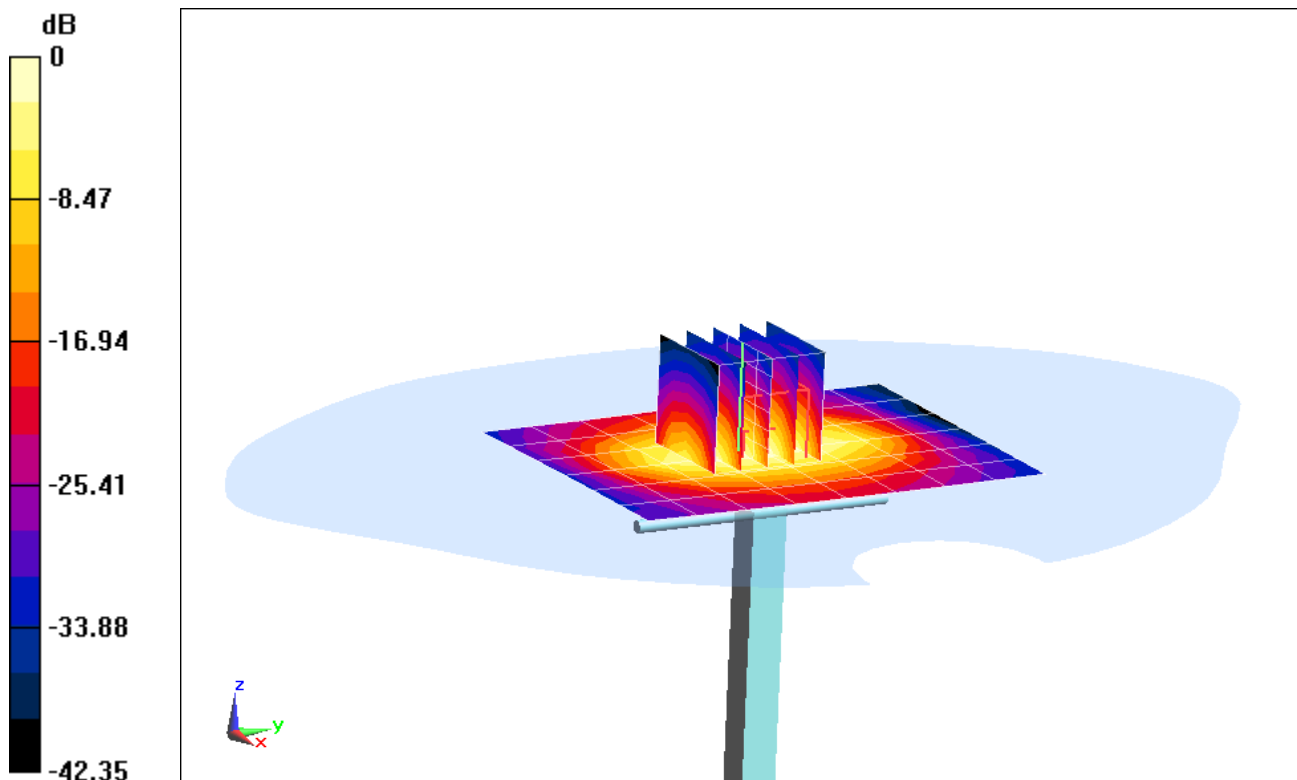

0 dB = 4.33 W/kg = 6.36 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d080

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.577 \text{ S/m}$; $\epsilon_r = 52.047$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 12-14-2016; Ambient Temp: 23.1°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7409; ConvF(7.47, 7.47, 7.47); Calibrated: 5/17/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/11/2016

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.26 W/kg

SAR(1 g) = 3.95 W/kg

Deviation(1 g) = 1.02%

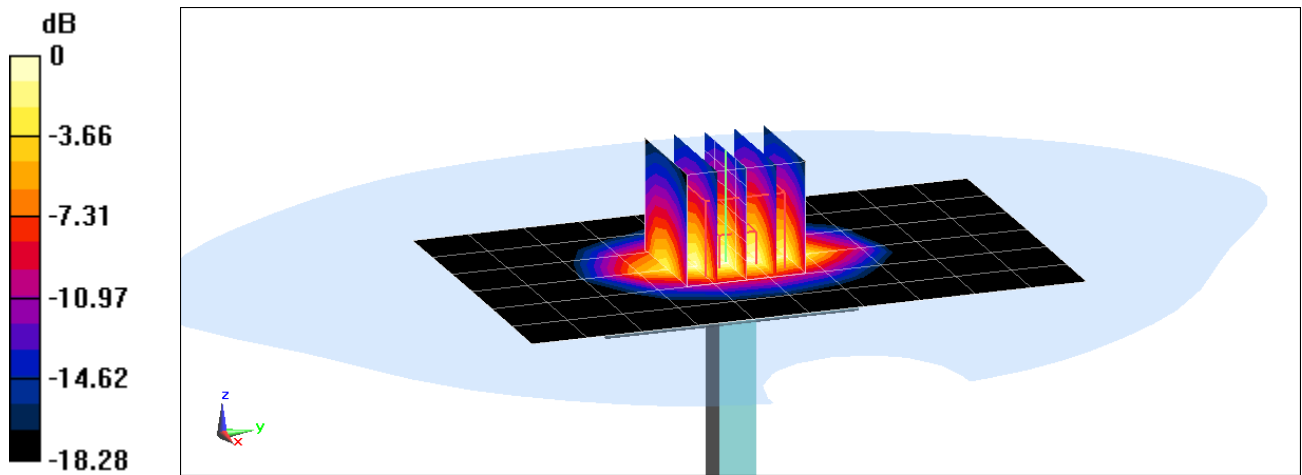

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 1.971 \text{ S/m}$; $\epsilon_r = 52.158$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 12-12-2016; Ambient Temp: 24.0°C; Tissue Temp: 23.3°C

Probe: EX3DV4 - SN7410; ConvF(7.4, 7.4, 7.4); Calibrated: 7/25/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/12/2016

Phantom: Sub TWIN SAM; Type: QD000P40CC; Serial: TP-1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.5 W/kg

SAR(1 g) = 5.01 W/kg

Deviation(1 g) = -2.72%

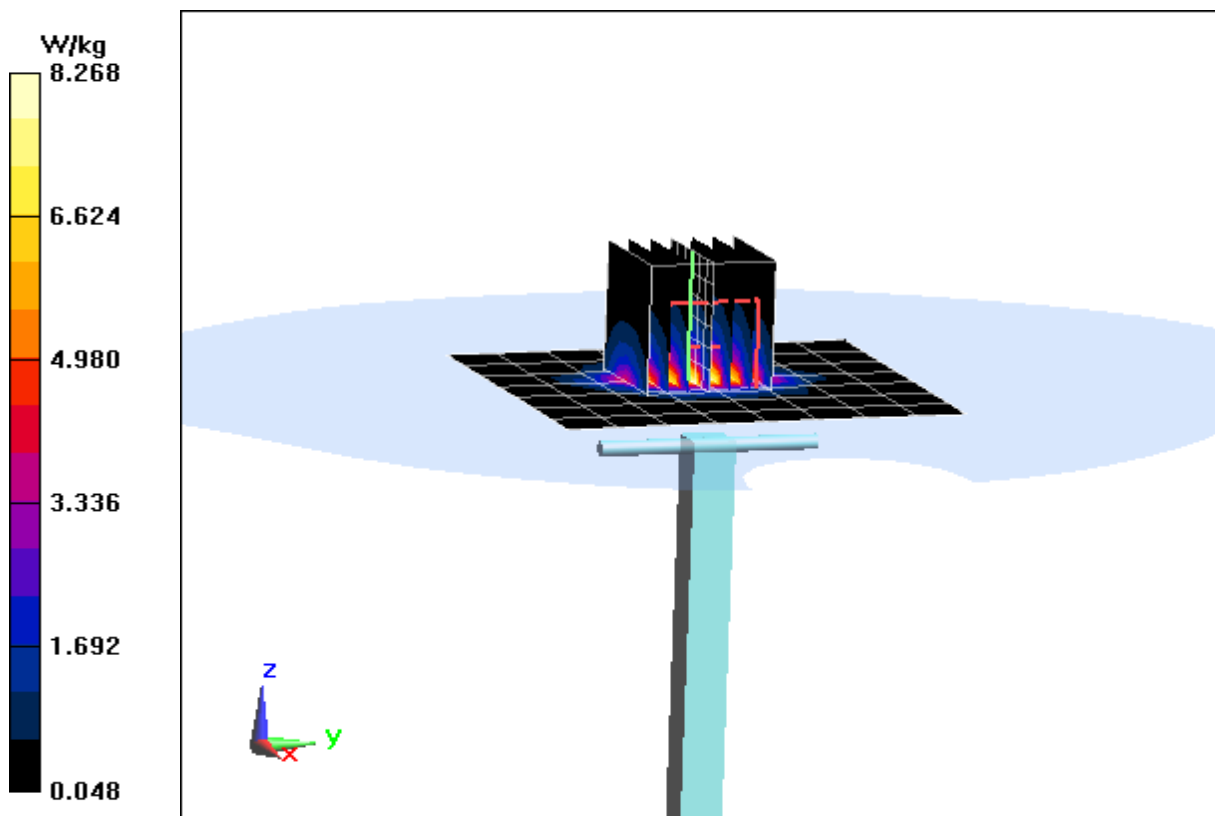

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 2.014 \text{ S/m}$; $\epsilon_r = 51.856$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-24-2017; Ambient Temp: 22.4°C; Tissue Temp: 22.7°C

Probe: ES3DV3 - SN3319; ConvF(4.2, 4.2, 4.2); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 10.9 W/kg

SAR(1 g) = 5.21 W/kg

Deviation(1 g) = 2.76%

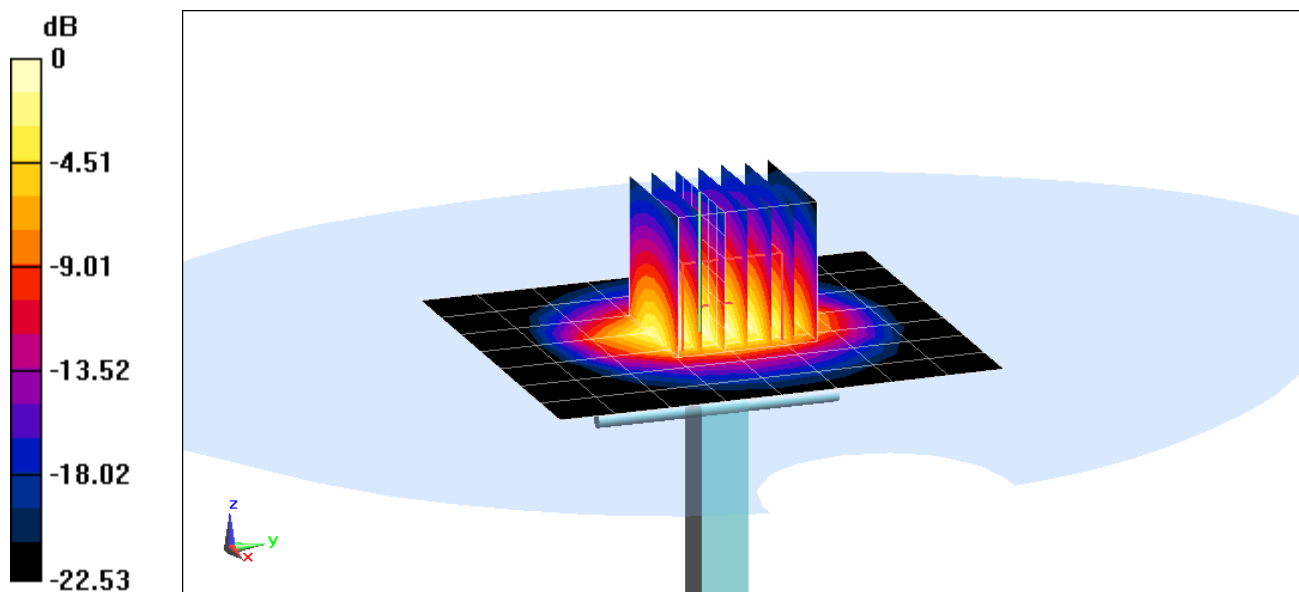

0 dB = 6.85 W/kg = 8.36 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used (interpolated):

$f = 5250 \text{ MHz}$; $\sigma = 5.522 \text{ S/m}$; $\epsilon_r = 47.054$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 12-26-2016; Ambient Temp: 20.9°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN3914; ConvF(4.32, 4.32, 4.32); Calibrated: 2/22/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/18/2016

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5250 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 14.5 W/kg

SAR(1 g) = 3.48 W/kg

Deviation(1 g) = -6.95%

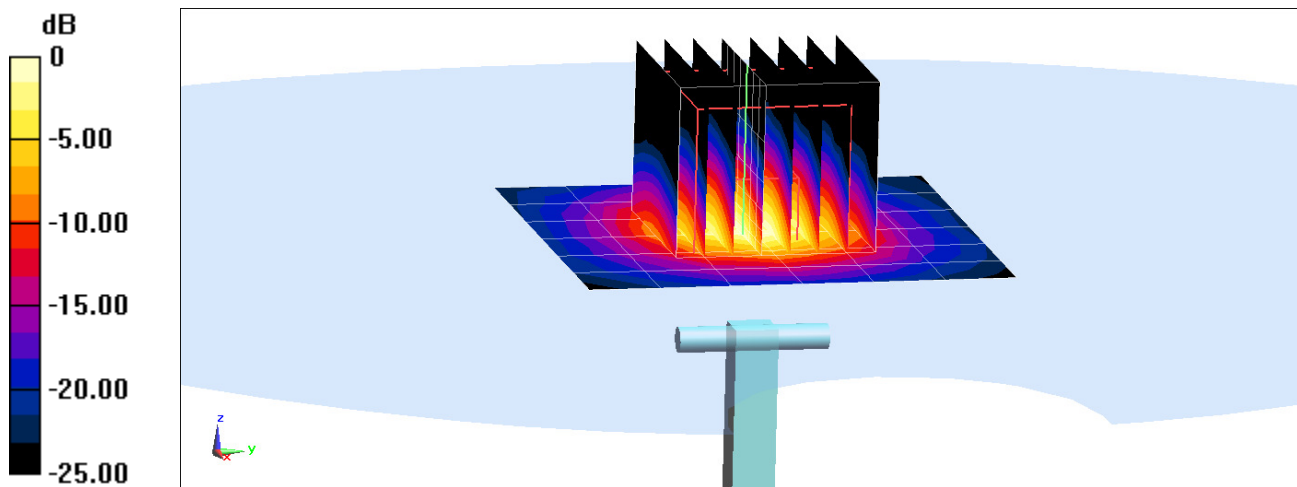

0 dB = 8.16 W/kg = 9.12 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used:

$f = 5600 \text{ MHz}$; $\sigma = 5.989 \text{ S/m}$; $\epsilon_r = 46.456$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 12-26-2016; Ambient Temp: 20.9°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN3914; ConvF(3.63, 3.63, 3.63); Calibrated: 2/22/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/18/2016

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5600 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Peak SAR (extrapolated) = 15.4 W/kg

SAR(1 g) = 3.59 W/kg

Deviation(1 g) = -6.75%

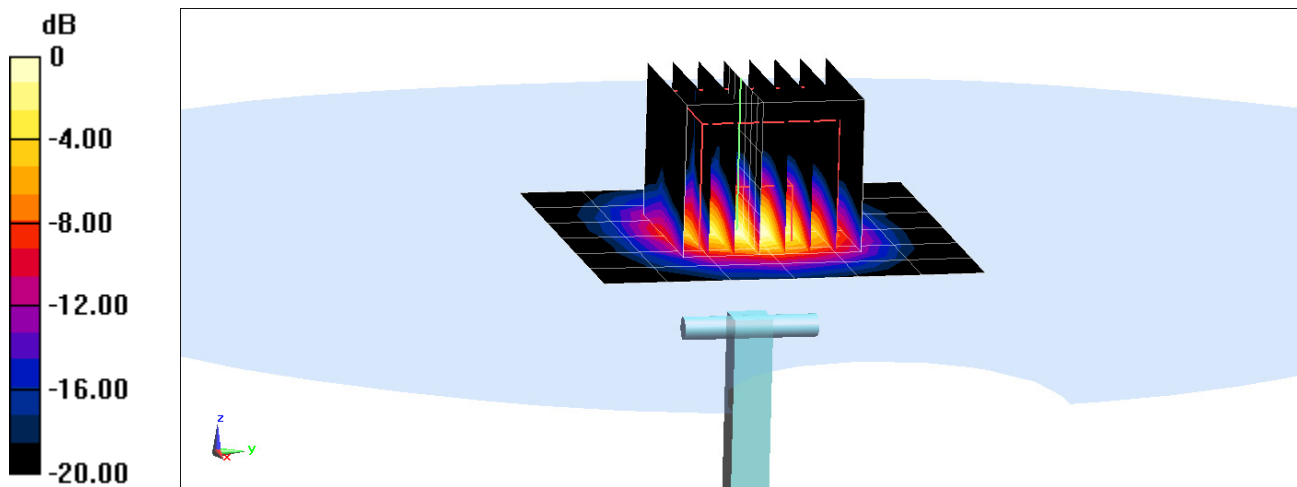

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used (interpolated):

$f = 5750 \text{ MHz}$; $\sigma = 6.197 \text{ S/m}$; $\epsilon_r = 46.239$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 12-26-2016; Ambient Temp: 20.9°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN3914; ConvF(3.86, 3.86, 3.86); Calibrated: 2/22/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/18/2016

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5750 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 15.7 W/kg

SAR(1 g) = 3.58 W/kg

Deviation(1 g) = -5.04%

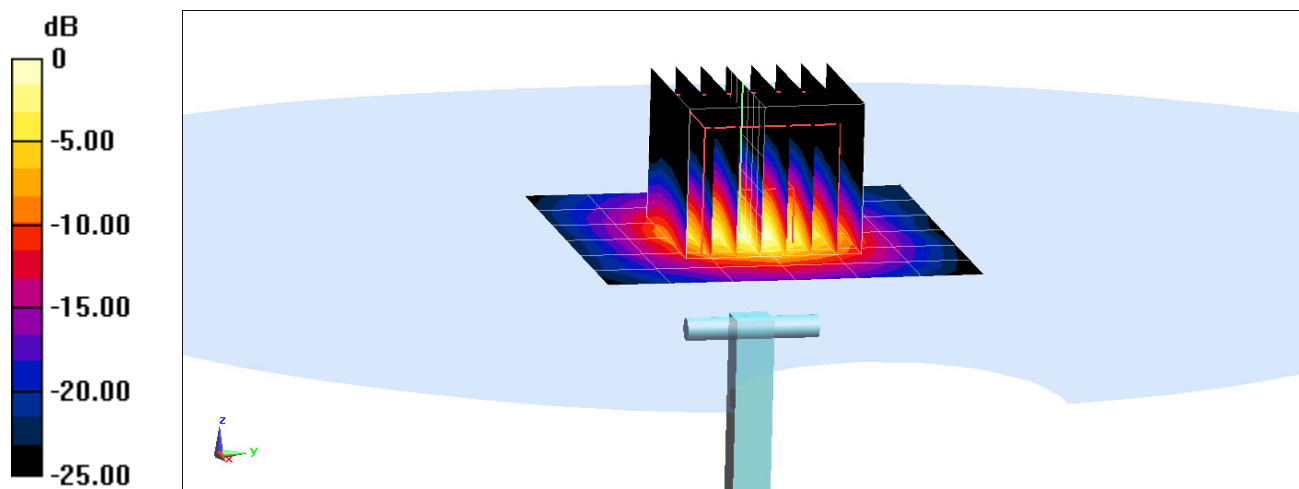

0 dB = 8.56 W/kg = 9.32 dBW/kg