



FCC CFR47 PART 15 SUBPART C

DTS Wireless LAN

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE Tablet + BT/BLE, DTS/UNII a/b/g/n/ac and ANT+

MODEL NUMBER : SM-T835C

FCC ID: A3LSMT835C

REPORT NUMBER: 4788506351-E1V1

ISSUE DATE: JUL 11, 2018

Prepared for
SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Prepared by
UL Korea, Ltd.
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433



TL-637

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	07/11/18	Initial issue	Junwhan Lee

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY.....	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT	7
5.2. MAXIMUM OUTPUT POWER.....	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	8
5.4. LIST OF TEST REDUCTION AND MODES.....	8
5.5. WORST-CASE CONFIGURATION AND MODE.....	9
5.6. DESCRIPTION OF TEST SETUP.....	10
6. TEST AND MEASUREMENT EQUIPMENT	12
7. REFERENCE MEASUREMENT RESULTS.....	13
7.1. ON TIME AND DUTY CYCLE RESULTS.....	13
7.2. 99% BANDWIDTH.....	15
7.2.1. 802.11b MODE IN THE 2.4 GHz BAND.....	15
7.2.2. 802.11g MODE IN THE 2.4 GHz BAND.....	15
7.2.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND	15
7.2.4. 99% BANDWIDTH PLOTS	16
8. MEASUREMENT METHODS	19
9. SUMMARY TABLE	20
10. ANTENNA PORT TEST RESULTS	21
10.1. 6 dB BANDWIDTH	21
10.1.1. 802.11b MODE IN THE 2.4 GHz BAND	22
10.1.2. 802.11g MODE IN THE 2.4 GHz BAND	22
10.1.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND.....	22
10.1.4. 6 dB BANDWIDTH PLOTS.....	23
10.2. OUTPUT POWER	26
10.2.1. 802.11b MODE IN THE 2.4 GHz BAND	27
10.2.2. 802.11g MODE IN THE 2.4 GHz BAND	28
10.2.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND.....	29
10.3. PSD.....	30

10.3.1.	802.11b MODE IN THE 2.4 GHz BAND	31
10.3.2.	802.11g MODE IN THE 2.4 GHz BAND	31
10.3.3.	802.11n HT20 MODE IN THE 2.4 GHz BAND.....	31
10.3.4.	PSD PLOTS	32
10.4.	OUT-OF-BAND EMISSIONS.....	35
10.4.1.	802.11b MODE IN THE 2.4 GHz BAND	36
10.4.2.	802.11g MODE IN THE 2.4 GHz BAND	38
10.4.3.	802.11n HT20 MODE IN THE 2.4 GHz BAND.....	40
11.	RADIATED TEST RESULTS	42
11.1.	LIMITS AND PROCEDURE.....	42
11.2.	TRANSMITTER ABOVE 1 GHz.....	44
11.2.1.	TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND ANTENNA1.....	44
11.2.2.	TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND ANTENNA2.....	54
11.2.3.	TX ABOVE 1 GHz 802.11g 2TX CDD MODE IN THE 2.4 GHz BAND	64
11.2.4.	TX ABOVE 1 GHz 802.11n HT20 2TX CDD MODE IN THE 2.4 GHz BAND	74
11.3.	WORST-CASE BELOW 1 GHz	84
12.	AC POWER LINE CONDUCTED EMISSIONS	88
13.	SETUP PHOTOS	93

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

EUT DESCRIPTION: GSM/WCDMA/LTE Tablet + BT/BLE, DTS/UNII a/b/g/n/ac and ANT+

MODEL NUMBER: SM-T835C

SERIAL NUMBER: R22K4004M1Z (RADIATED);
R22K4004WOF (CONDUCTED)

DATE TESTED: JUN 20, 2018 - JUL 11, 2018

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



SungGil Park
Suwon Lab Engineer
UL Korea, Ltd.

Tested By:



Junwhan Lee
Suwon Lab Engineer
UL Korea, Ltd.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. KDB 558074 D01 DTS Meas Guidance v04.
4. ANSI C63.10-2013.
5. KDB 662911 D01 v02r01

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
☒	Chamber 1
☒	Chamber 2
☐	Chamber 3

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	3.86 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Tablet + BT/BLE, DTS/UNII a/b/g/n/ac and ANT+. This test report addresses the DTS (WLAN) operational mode.

WiFi MIMO Condition

Frequency	Mode	Antenna 1	Antenna 2
2.4 GHz	802.11b	TX / RX	TX / RX
	802.11g	TX / RX	TX / RX
	802.11g MIMO	TX / RX	TX / RX
	802.11n	TX / RX	TX / RX
	802.11n MIMO	TX / RX	TX / RX
5 GHz	802.11a	TX / RX	TX / RX
	802.11a MIMO	TX / RX	TX / RX
	802.11n	TX / RX	TX / RX
	802.11n MIMO	TX / RX	TX / RX
	802.11ac	TX / RX	TX / RX
	802.11ac MIMO	TX / RX	TX / RX

Simultaneous TX Condition

Frequency	Supported
2.4 GHz Antenna 1 + 5 GHz Antenna 2	Yes
2.4 GHz Antenna 2 + 5 GHz Antenna 1	No
2.4 GHz Antenna 1 + 5 GHz Antenna 1	No
2.4 GHz Antenna 2 + 5 GHz Antenna 2	No

Spurious Emissions for Simultaneous Transmission were reported on UNII Test Report section 11.5. (Test Report number : 4788506351-E4)

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

Frequency Range [MHz]	Mode	Output Power [dBm]		Output Power [mW]	
		Antenna1	Antenna2	Antenna1	Antenna2
2412 - 2462	802.11b	12.68	12.96	18.54	19.77
	802.11g MIMO	15.60		36.31	
	802.11n20 MIMO	15.42		34.83	

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes internal antenna, with a antenna1's maximum gain of -1.84 dBi and antenna2's maximum gain of -4.09 dBi .

5.4. LIST OF TEST REDUCTION AND MODES

The output power on covered modes is equal to or less than one referenced.

Frequency Range (MHz)	Mode	Covered by
2412 - 2462	802.11b Legacy 1TX	802.11b Legacy 1TX
	802.11g 1TX	802.11g CDD 2TX
	802.11g CDD 2TX	802.11g CDD 2TX
	802.11n HT20 1TX	802.11n HT20 CDD 2TX
	802.11n HT20 SDM/CDD 2TX	802.11n HT20 CDD 2TX

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

For ANT1 and MIMO, the fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation.

For ANT2, the fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

Based on the baseline scan, the worst-case data rates were:

802.11b mode: 1 Mbps (Legacy 1TX)
802.11g mode: 6 Mbps (2TX CDD)
802.11n HT20 mode: MCS0 (2TX CDD)

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA200	R37K49A2631DK3	N/A
Data Cable	SAMSUNG	EP-DN930CWE	N/A	N/A
Earphone	SAMSUNG	EO-EG920BW	N/A	N/A

I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.1m	N/A
2	Audio	2	Mini-Jack	Unshielded	1.2m	N/A


TEST SETUP

The EUT is a stand-alone unit during the tests.
Test software exercised the EUT to enable DTS mode.


NOTE

Additional tests under 1 GHz were performed with the keyboard attached to check on all port terminated conditions. Keyboard is not an in-box item.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

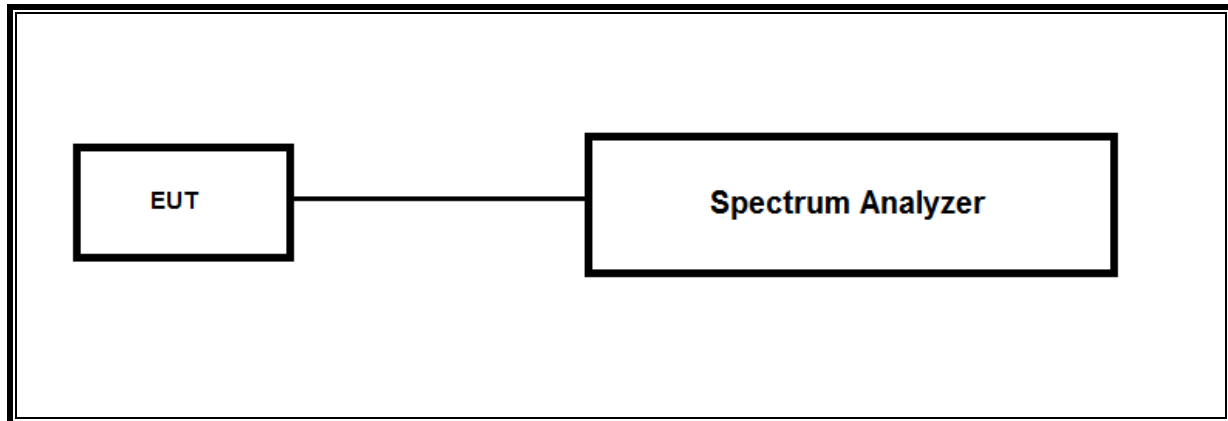

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

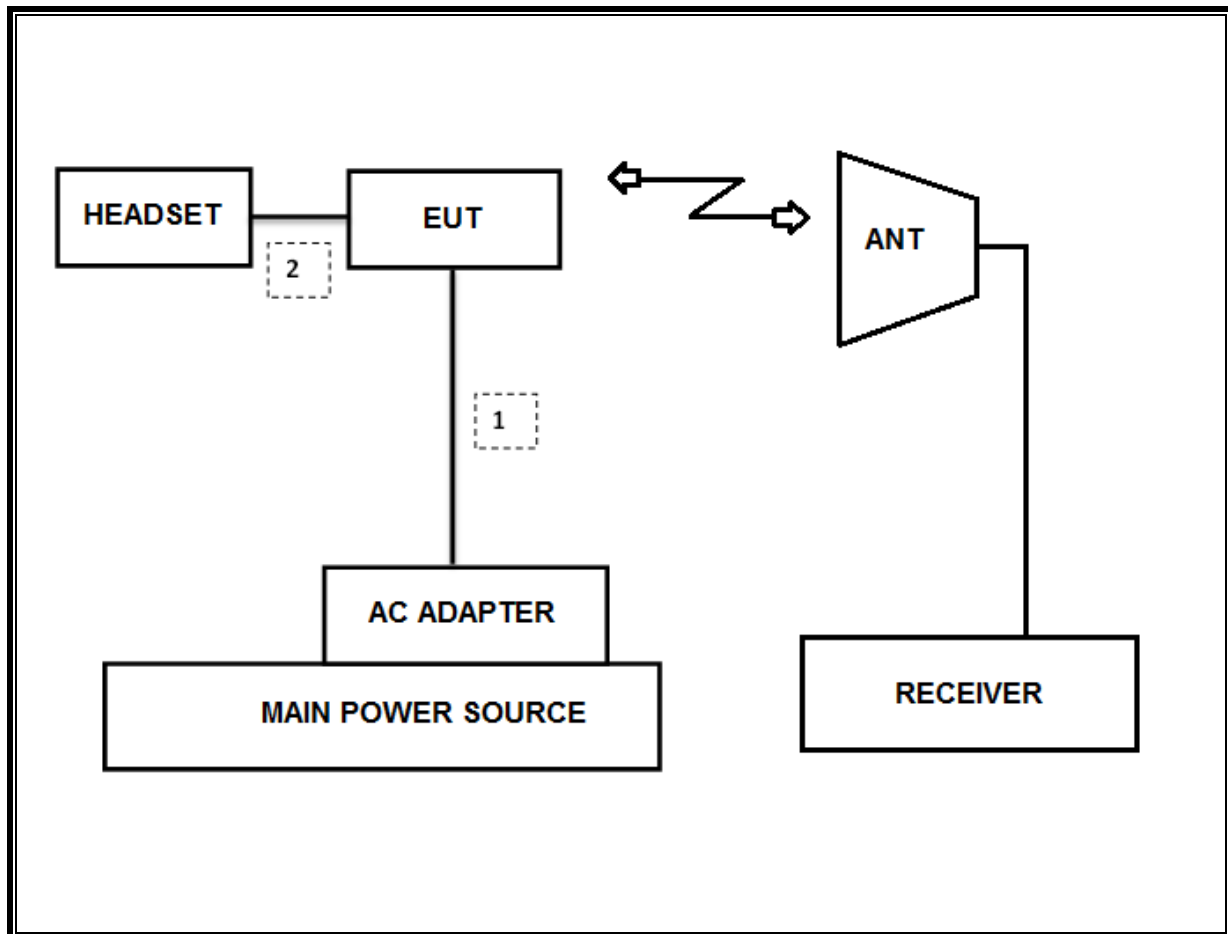

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	08-31-19
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	09-14-19
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	08-31-19
Antenna, Horn, 18 GHz	ETS	3115	00167211	10-14-18
Antenna, Horn, 18 GHz	ETS	3115	00161451	03-10-19
Antenna, Horn, 18 GHz	ETS	3117	00168724	05-31-19
Antenna, Horn, 18 GHz	ETS	3117	00168717	05-31-19
Antenna, Horn, 18 GHz	ETS	3117	00205959	11-29-18
Antenna, Horn, 40 GHz	ETS	3116C	00166155	12-04-19
Antenna, Horn, 40 GHz	ETS	3116C	00168645	12-04-19
Antenna, Horn, 40 GHz	ETS	3116C-PA	00168841	11-13-19
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-09-18
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-07-18
Preamplifier, 1000 MHz	Sonoma	310N	370599	08-10-18
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	08-08-18
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-08-18
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	08-11-18
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-08-18
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-08-18
Spectrum Analyzer, 43.5 GHz	R&S	FSW43	104089	08-11-18
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-08-18
Attenuator	PASTERNAK	PE7087-10	A001	08-08-18
Attenuator	PASTERNAK	PE7087-10	A008	08-08-18
Attenuator	PASTERNAK	PE7087-10	2	08-10-18
Attenuator	PASTERNAK	PE7087-10	A009	08-08-18
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-08-18
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-08-18
EMI Test Receive, 44 GHz	R&S	ESW44	101590	08-09-18
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-07-18
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	08-08-18
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	08-08-18
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	020	08-11-18
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	08-08-18
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	08-08-18
High Pass Filter 3GHz	Micro-Tronics	HPM17543	020	08-11-18
High Pass Filter 6GHz	Micro-Tronics	HPS17542	009	08-08-18
High Pass Filter 6GHz	Micro-Tronics	HPS17542	016	08-08-18
High Pass Filter 6GHz	Micro-Tronics	HPS17542	021	08-11-18
LISN	R&S	ENV-216	101837	08-09-18
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	


7. REFERENCE MEASUREMENT RESULTS

7.1. ON TIME AND DUTY CYCLE RESULTS


Mode	ON Time B [msec]	Period [msec]	Duty Cycle x [linear]	Duty Cycle [%]	Duty Cycle Correction Factor [dB]	1/T Minimum VBW [kHz]
2400MHz Bands						
802.11b	18.35	18.44	0.995	99.5%	0.00	0.010
802.11g	3.049	3.145	0.969	96.9%	0.13	0.328
802.11n HT20	2.834	2.933	0.966	96.6%	0.15	0.353

LIMITS


None; for reporting purposes only.

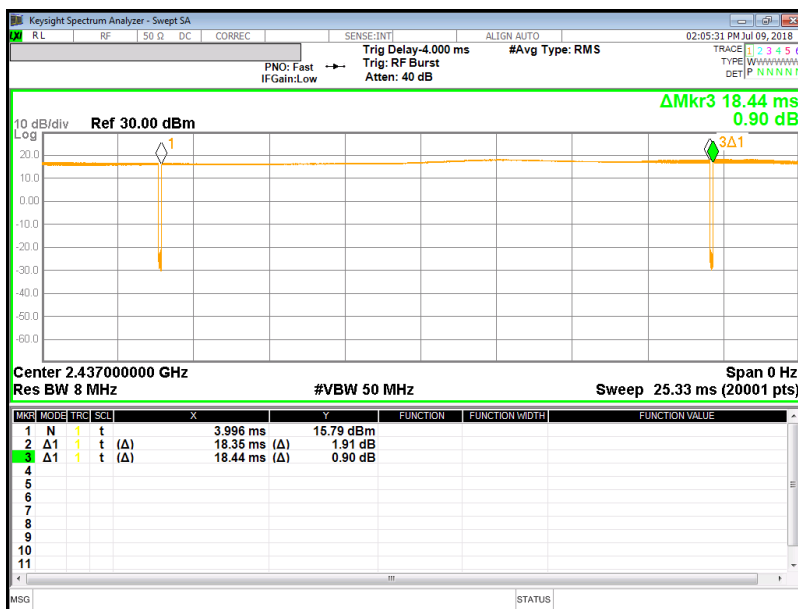

[802.11b Mode]

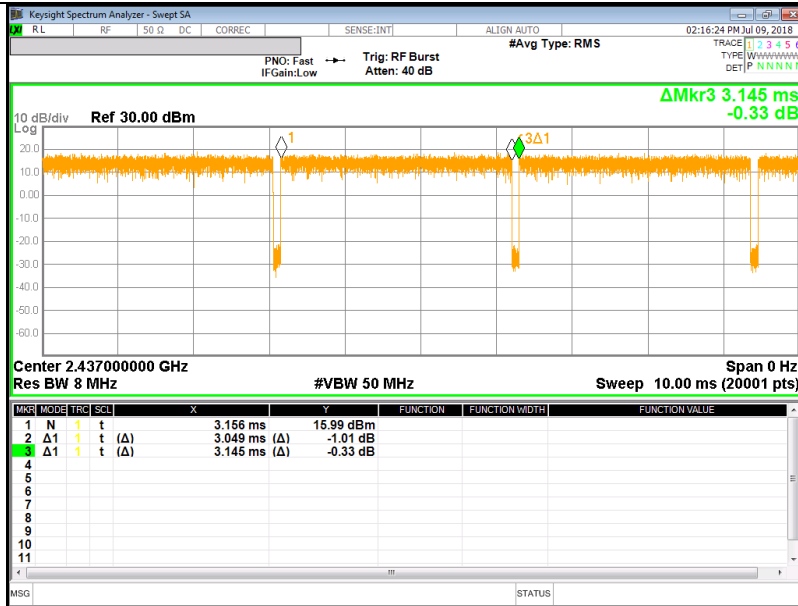

[802.11g Mode]

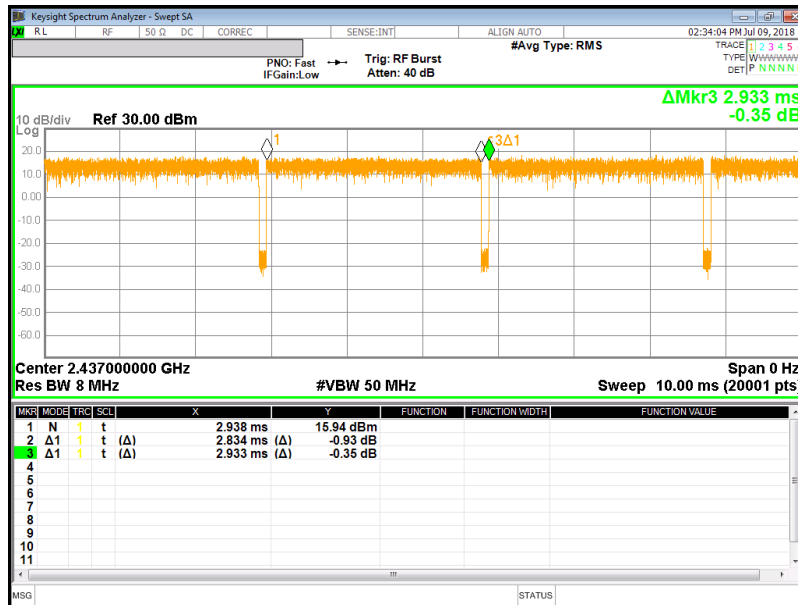

[802.11n20 Mode]

7.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

7.2.1. 802.11b MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]	
		Antenna 1	Antenna 2
1	2412	12.415	12.756
6	2437	12.827	12.853
11	2462	12.688	12.738


7.2.2. 802.11g MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]	
		Antenna 1	Antenna 2
1	2412	16.289	16.343
6	2437	16.349	16.376
11	2462	16.384	16.360


7.2.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]	
		Antenna 1	Antenna 2
1	2412	17.448	17.564
6	2437	17.601	17.605
11	2462	17.580	17.597


7.2.4. 99% BANDWIDTH PLOTS

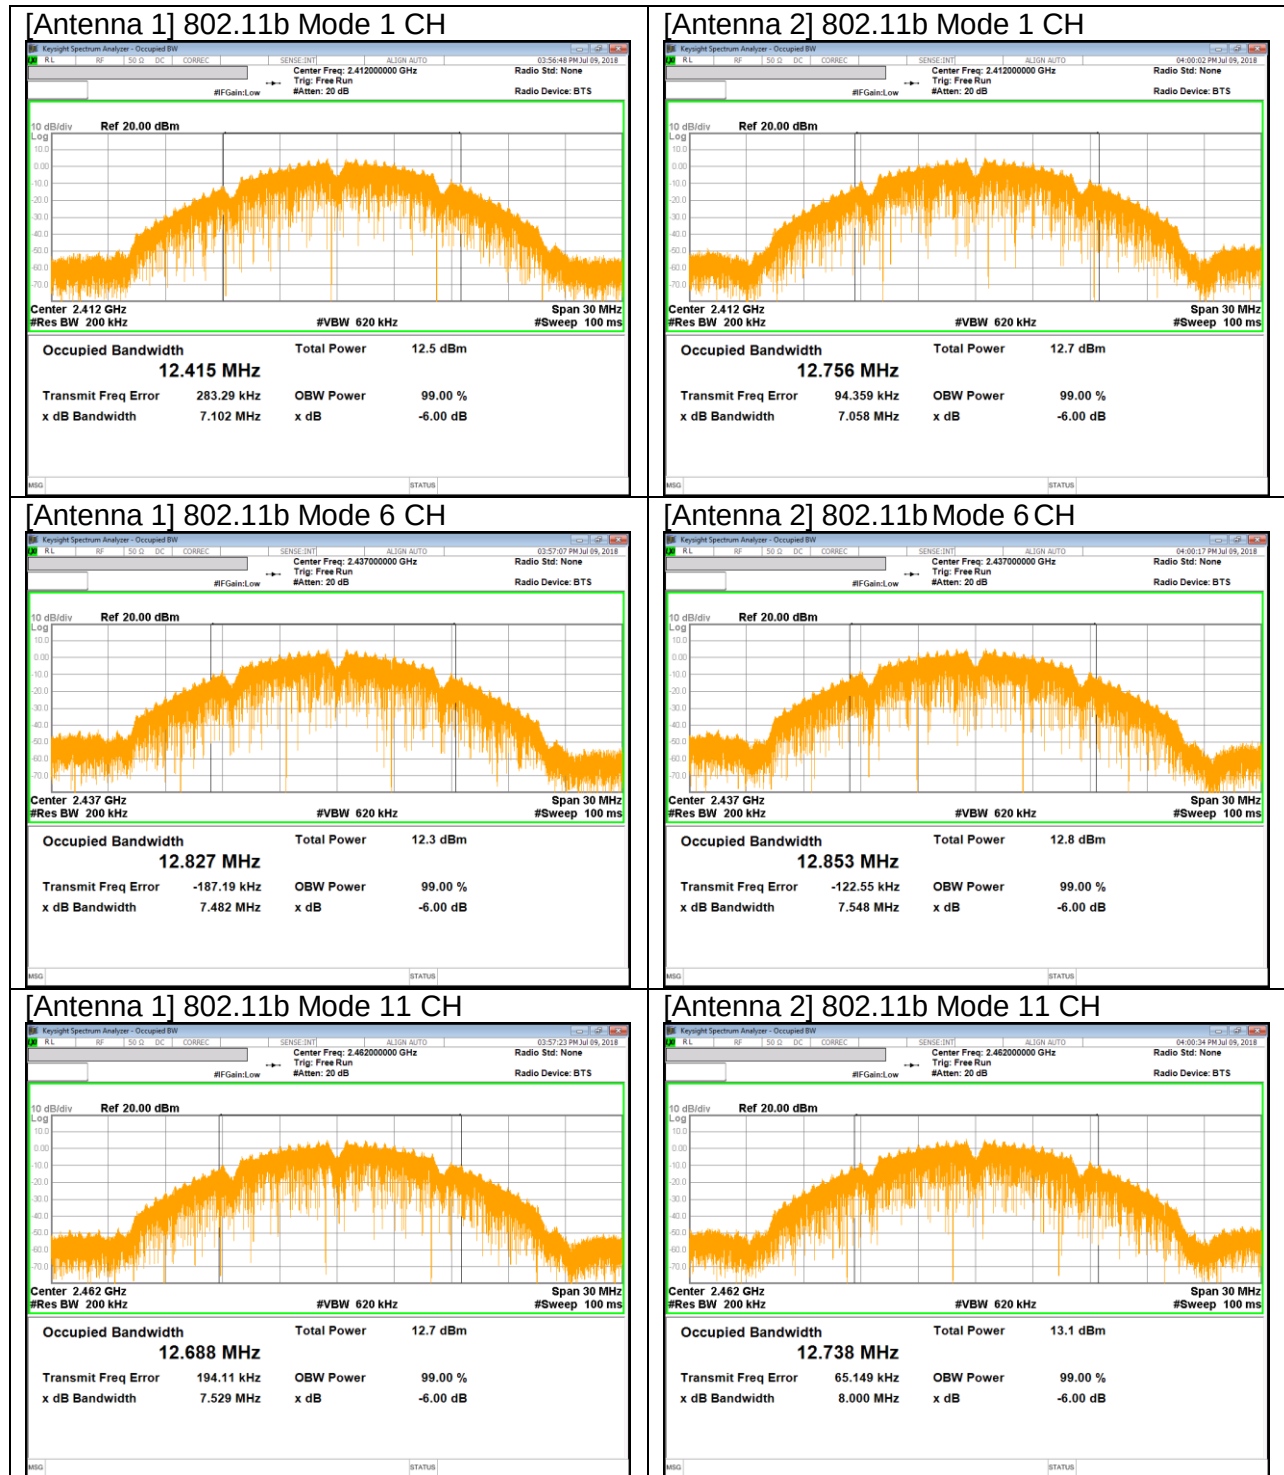


[Antenna 1] 802.11g Mode 1 CH

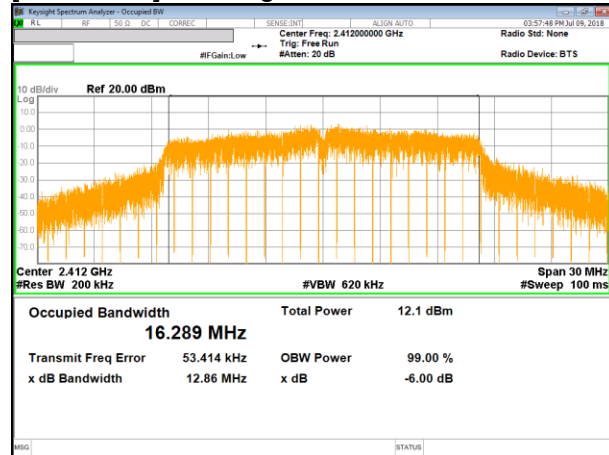


[Antenna 2] 802.11g Mode 1 CH

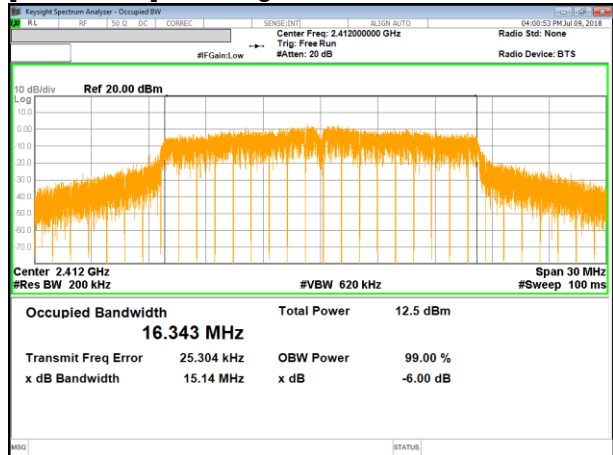


[Antenna 1] 802.11g Mode 6 CH

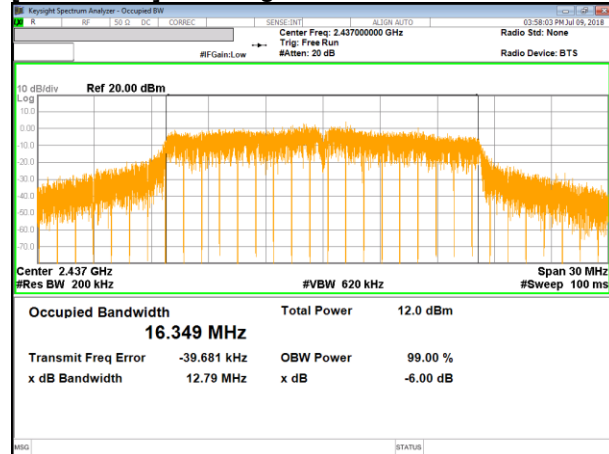


[Antenna 2] 802.11g Mode 6 CH

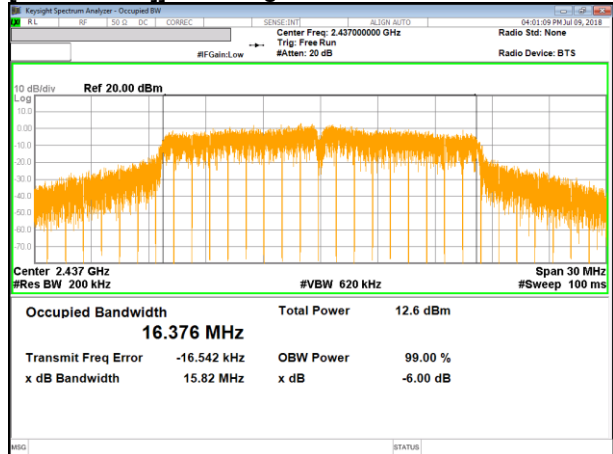


[Antenna 1] 802.11g Mode 11 CH

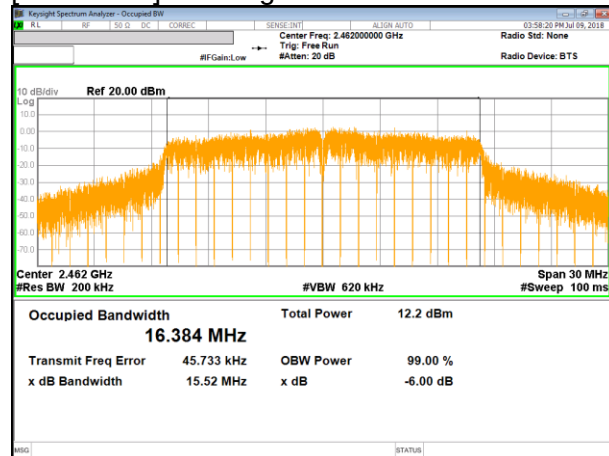

[Antenna 2] 802.11g Mode 11 CH

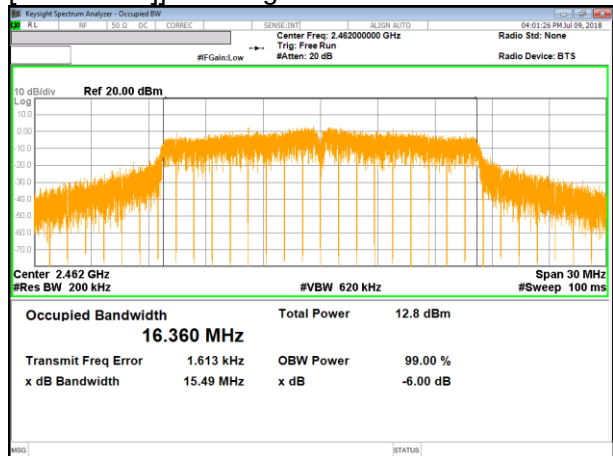

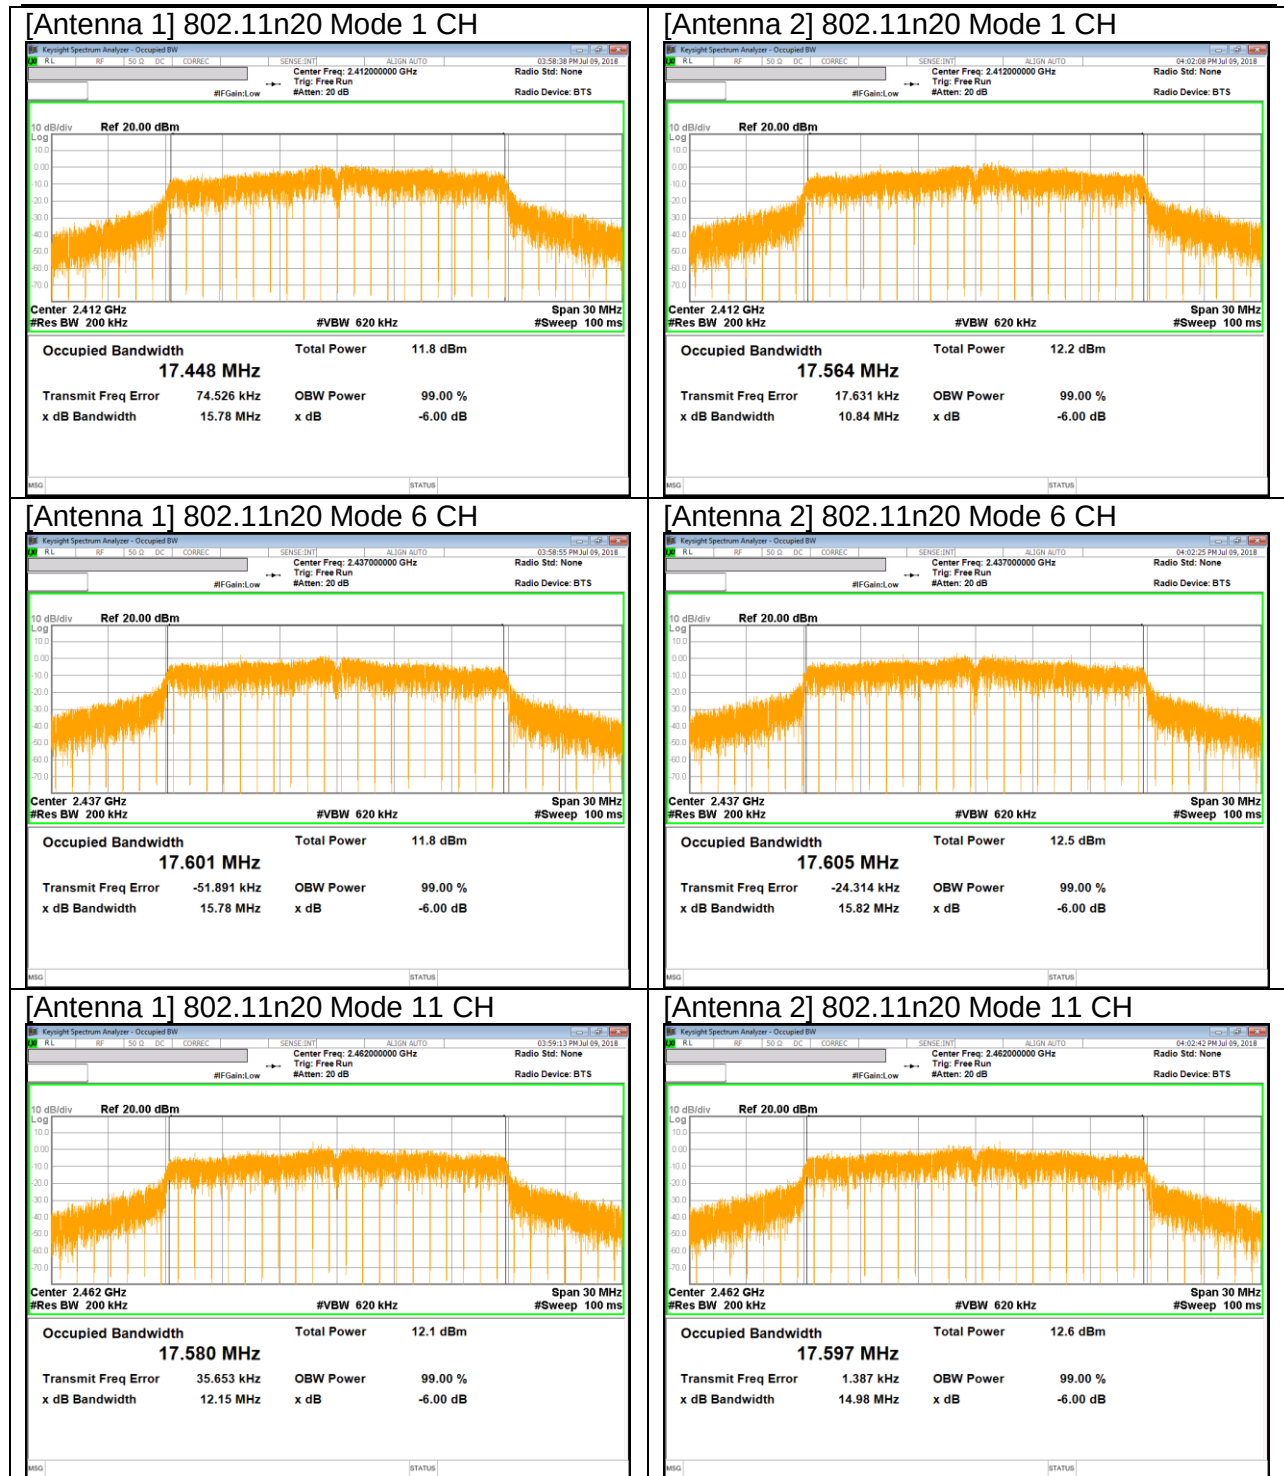

8. MEASUREMENT METHODS

6 dB BW : KDB 558074 D01 v04, Section 8.2.

OUTPUT POWER : KDB 558074 D01 v04, Section 9.2.3.1.

POWER SPECTRAL DENSITY : KDB 558074 D01 v04, Section 10.3./10.5.

Out-of-band EMISSIONS (Conducted) : KDB 558074 D01 v04, Section 11.1, 11.2.

Out-of-band EMISSIONS IN NON-RESTRICTED BANDS: KDB 558074 D01 v04, Section 11.0.

Out-of-band EMISSIONS IN RESTRICTED BANDS : KDB 558074 D01 v04, Section 12.1.

AC Power Line Conducted Emission : ANSI C63.10-2013, Section 6.2.

9. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
15.247 (a)(2)	Occupied Band width (6dB)	>500KHz	Conducted	Pass
2.1051, 15.247 (d)	Band Edge / Conducted Spurious Emission	-30dBc		Pass
15.247 (b)(3)	TX conducted output power	<30dBm		Pass
15.247 (e)	PSD	<8dBm		Pass
15.207 (a)	AC Power Line conducted emissions	Section 10	Power Line conducted	Pass
15.205, 15.209	Radiated Spurious Emission	< 54dBuV/m	Radiated	Pass

10. ANTENNA PORT TEST RESULTS

10.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

Reference to KDB 558074 D01 DTS Meas Guidance v04: The transmitter output is connected to a spectrum analyzer with the RBW set to 100KHz, the VBW $\geq 3 \times$ RBW, peak detector and max hold.

RESULTS

10.1.1. 802.11b MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]		Minimum Limit [MHz]
		ANTENNA 1	ANTENNA 2	
1	2412	7.528	7.535	0.5
6	2437	7.565	7.538	0.5
11	2462	7.523	7.546	0.5
Worst		7.523		


10.1.2. 802.11g MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]		Minimum Limit [MHz]
		ANTENNA 1	ANTENNA 2	
1	2412	12.60	15.05	0.5
6	2437	15.02	15.05	0.5
11	2462	15.06	15.03	0.5
Worst		12.60		


10.1.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]		Minimum Limit [MHz]
		ANTENNA 1	ANTENNA 2	
1	2412	13.82	15.04	0.5
6	2437	15.02	15.05	0.5
11	2462	15.05	15.06	0.5
Worst		13.82		


10.1.4. 6 dB BANDWIDTH PLOTS

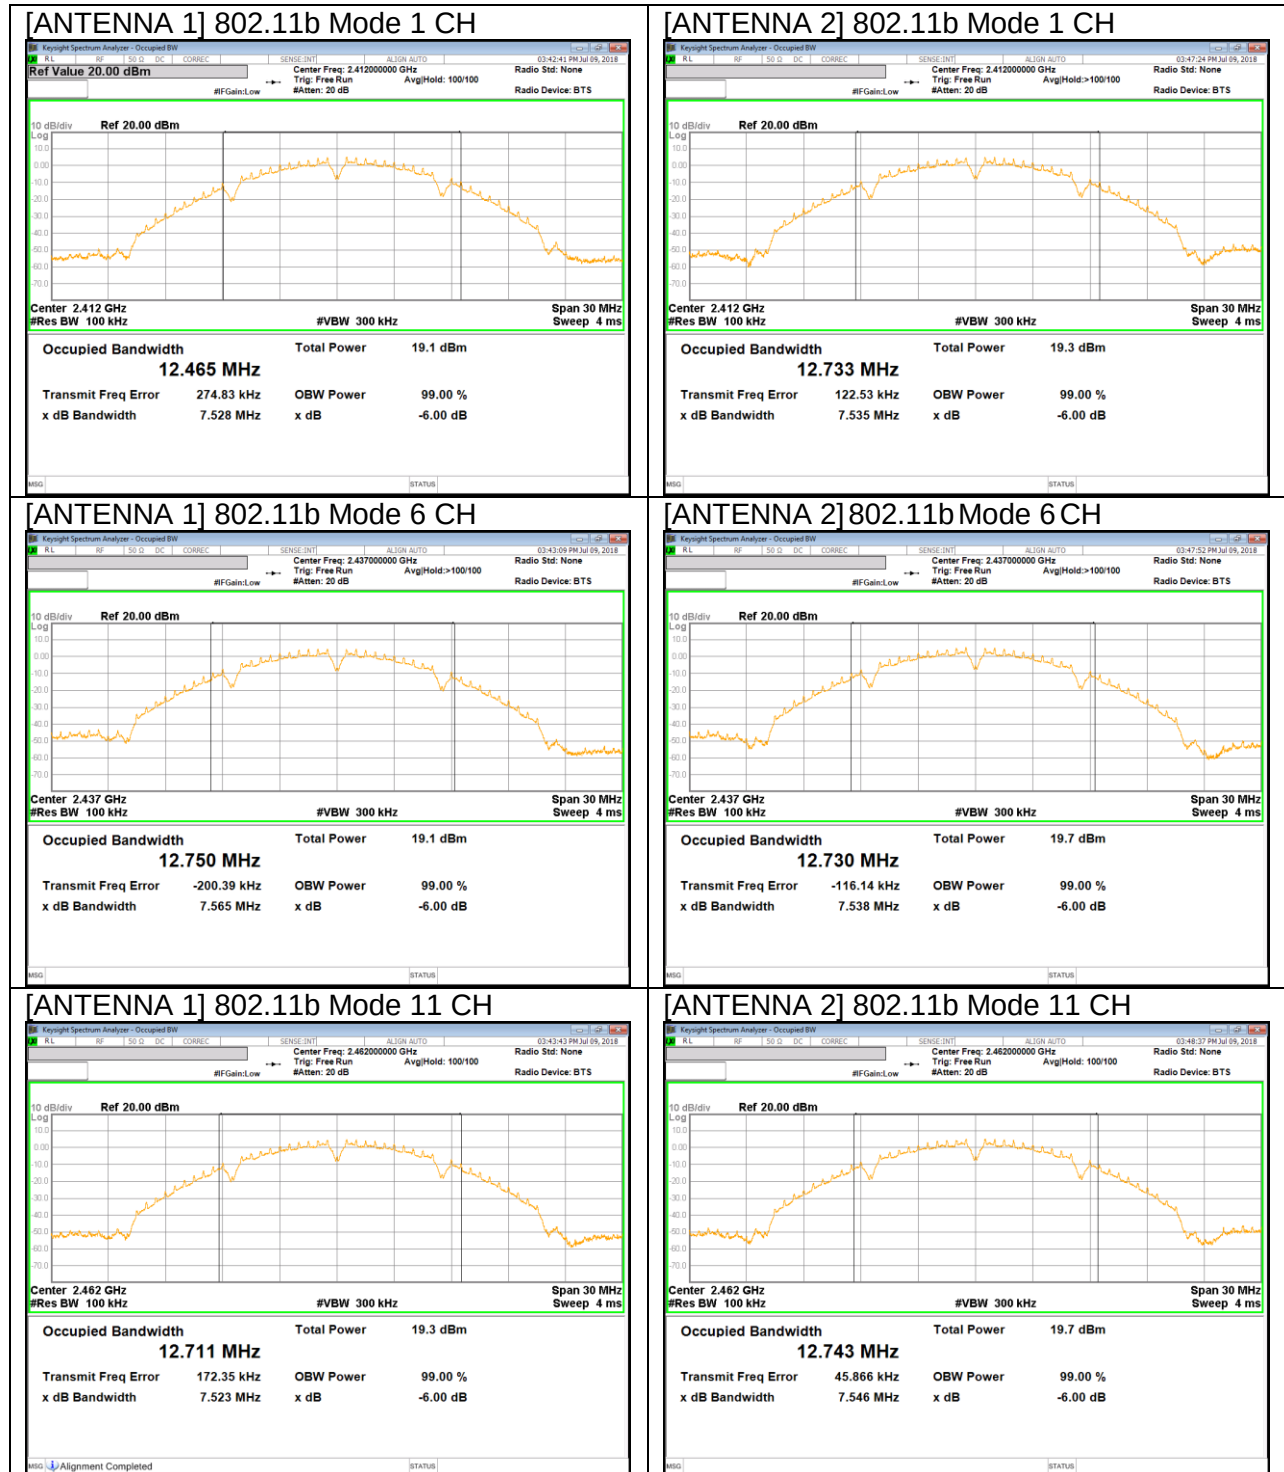


[ANTENNA 1] 802.11g Mode 1 CH

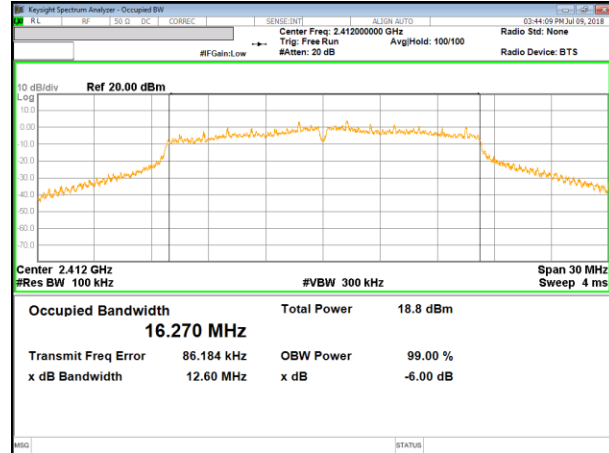


[ANTENNA 2] 802.11g Mode 1 CH

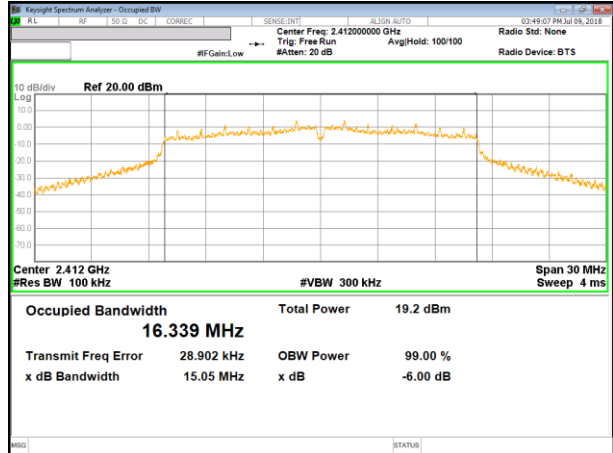


[ANTENNA 1] 802.11g Mode 6 CH

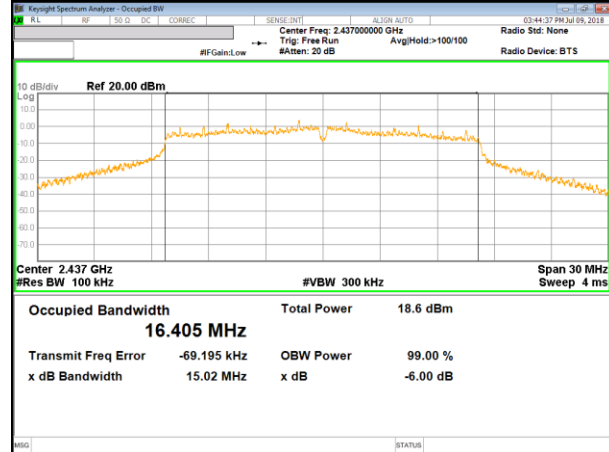


[ANTENNA 2] 802.11g Mode 6 CH

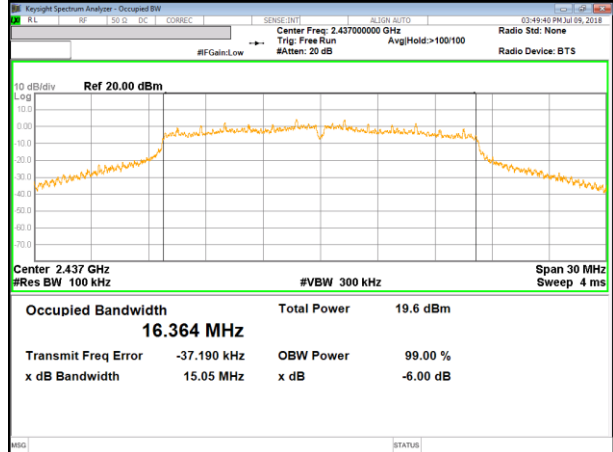


[ANTENNA 1] 802.11g Mode 11 CH

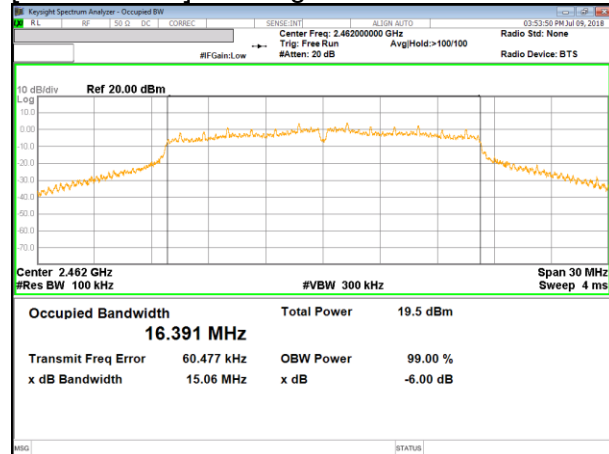

[ANTENNA 2] 802.11g Mode 11 CH

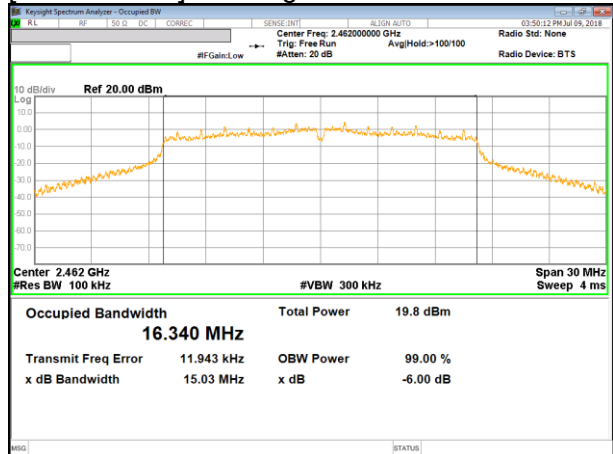

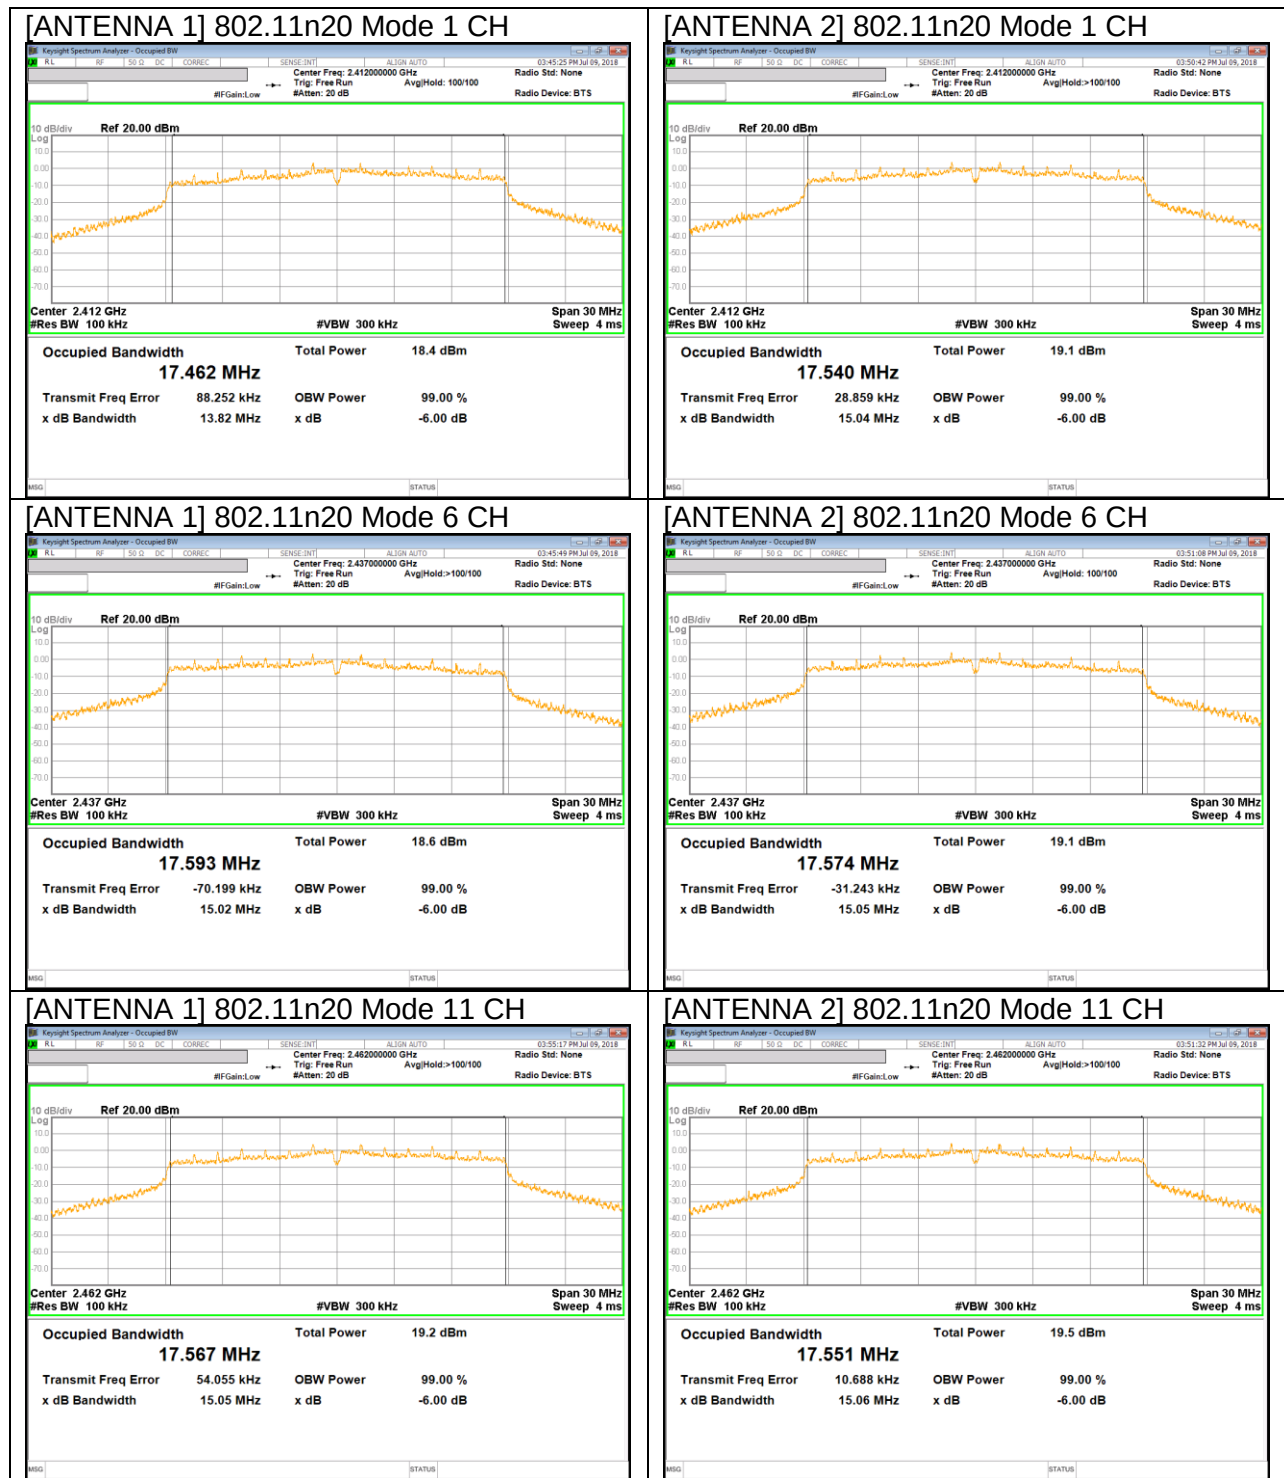

10.2. OUTPUT POWER

LIMITS

FCC §15.247

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss was entered as an offset in the power meter to allow for direct reading of power.

Output power measurement was performed utilizing the “§9.2.3.1 AVGPM” under KDB558074 D01 DTS Meas Guidance v04.

Duty cycle correction factor is already added to the average output power results for duty cycle factor < 98%. (802.11g, 802.11n mode)

DIRECTIONAL ANTENNA GAIN

The TX chains are correlated and the antenna gain is unequal among the chains.
The directional gain is:

2.4GHz

Antenna 1 Gain [dBi]	Antenna 2 Gain [dBi]	Correlated Chains Directional Gain [dBi]
-1.84	-4.09	0.12

- IEEE 802.11b Mode is not supported MIMO operation. So can't transmit on two antennas as the same time.

RESULTS

10.2.1. 802.11b MODE IN THE 2.4 GHz BAND

Limits

Channel	Frequency [MHz]	Directional Gain ANTENNA1 [dBi]	Directional Gain ANTENNA2 [dBi]	FCC Power Limit [dBm]	Max Power [dBm]
1	2412	-1.84	-4.09	30.00	30.00
6	2437	-1.84	-4.09	30.00	30.00
11	2462	-1.84	-4.09	30.00	30.00

Duty Cycle CF [dB]	0.00	Included in Calculations of Corr'd Power
--------------------	------	--

Results

Channel	Frequency [MHz]	ANTENNA1 Meas Power [dBm]	ANTENNA2 Meas Power [dBm]	Maximum Power [dBm]	Power Limit [dBm]	Margin [dB]
1	2412	12.26	12.53	12.53	30.00	-17.47
6	2437	12.18	12.78	12.78	30.00	-17.22
11	2462	12.68	12.96	12.96	30.00	-17.04
Worst				12.96	30.00	-17.04

10.2.2. 802.11g MODE IN THE 2.4 GHz BAND

Limits

Channel	Frequency [MHz]	Directional Gain [dBi]	FCC Power Limit [dBm]	Max Power EIRP Limit [dBm]
1	2412	0.12	30.00	30.00
6	2437	0.12	30.00	30.00
11	2462	0.12	30.00	30.00

Duty Cycle CF [dB]	0.13	Included in Calculations of Corr'd Power
--------------------	------	--

Results

Channel	Frequency [MHz]	ANTENNA1 Meas Power [dBm]	ANTENNA2 Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Margin [dB]
1	2412	12.10	12.35	15.24	30.00	-14.76
6	2437	12.01	12.59	15.32	30.00	-14.68
11	2462	12.34	12.82	15.60	30.00	-14.40
Worst				15.60	30.00	-14.40

10.2.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

Limits

Channel	Frequency [MHz]	Directional Gain [dBi]	FCC Power Limit [dBm]	Max Power EIRP Limit [dBm]
1	2412	0.12	30.00	30.00
6	2437	0.12	30.00	30.00
11	2462	0.12	30.00	30.00

Duty Cycle CF [dB]	0.15	Included in Calculations of Corr'd Power
--------------------	------	--

Results

Channel	Frequency [MHz]	ANTENNA1 Meas Power [dBm]	ANTENNA2 Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Margin [dB]
1	2412	11.88	12.17	15.04	30.00	-14.96
6	2437	11.83	12.44	15.16	30.00	-14.84
11	2462	12.15	12.65	15.42	30.00	-14.58
Worst				15.42	30.00	-14.58

10.3. PSD

LIMITS

FCC §15.247

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE

Power Spectral Density was performed utilizing the "Method §10.3 AVGPS-1(802.11 b mode) and §10.5 AVGPS-2(802.11 g/n mode)" under KDB558074 D01 DTS Meas Guidance v04

RESULTS

10.3.1. 802.11b MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	Antenna 1 [dBm]	Antenna 2 [dBm]	Max PSD [dBm]	Limit [dBm]	Margin [dB]
1	2412	-18.05	-17.77	-17.77	8.00	-25.77
6	2437	-18.40	-17.78	-17.78	8.00	-25.78
11	2462	-17.74	-17.59	-17.59	8.00	-25.59

Duty Cycle CF [dB]	0.00	Included in Calculations of PPSP
--------------------	------	----------------------------------

10.3.2. 802.11g MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	Antenna 1 [dBm]	Antenna 2 [dBm]	Total PSD [dBm]	Limit [dBm]	Margin [dB]
1	2412	-19.18	-18.69	-15.79	8.00	-23.79
6	2437	-19.47	-18.91	-16.04	8.00	-24.04
11	2462	-19.30	-18.78	-15.89	8.00	-23.89


Duty Cycle CF [dB]	0.13	Included in Calculations of PPSP
--------------------	------	----------------------------------

10.3.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	Antenna 1 [dBm]	Antenna 2 [dBm]	Total PSD [dBm]	Limit [dBm]	Margin [dB]
1	2412	-19.81	-19.33	-16.40	8.00	-24.40
6	2437	-20.21	-19.35	-16.60	8.00	-24.60
11	2462	-19.54	-19.07	-16.14	8.00	-24.14

Duty Cycle CF [dB]	0.15	Included in Calculations of PPSP
--------------------	------	----------------------------------


10.3.4. PSD PLOTS

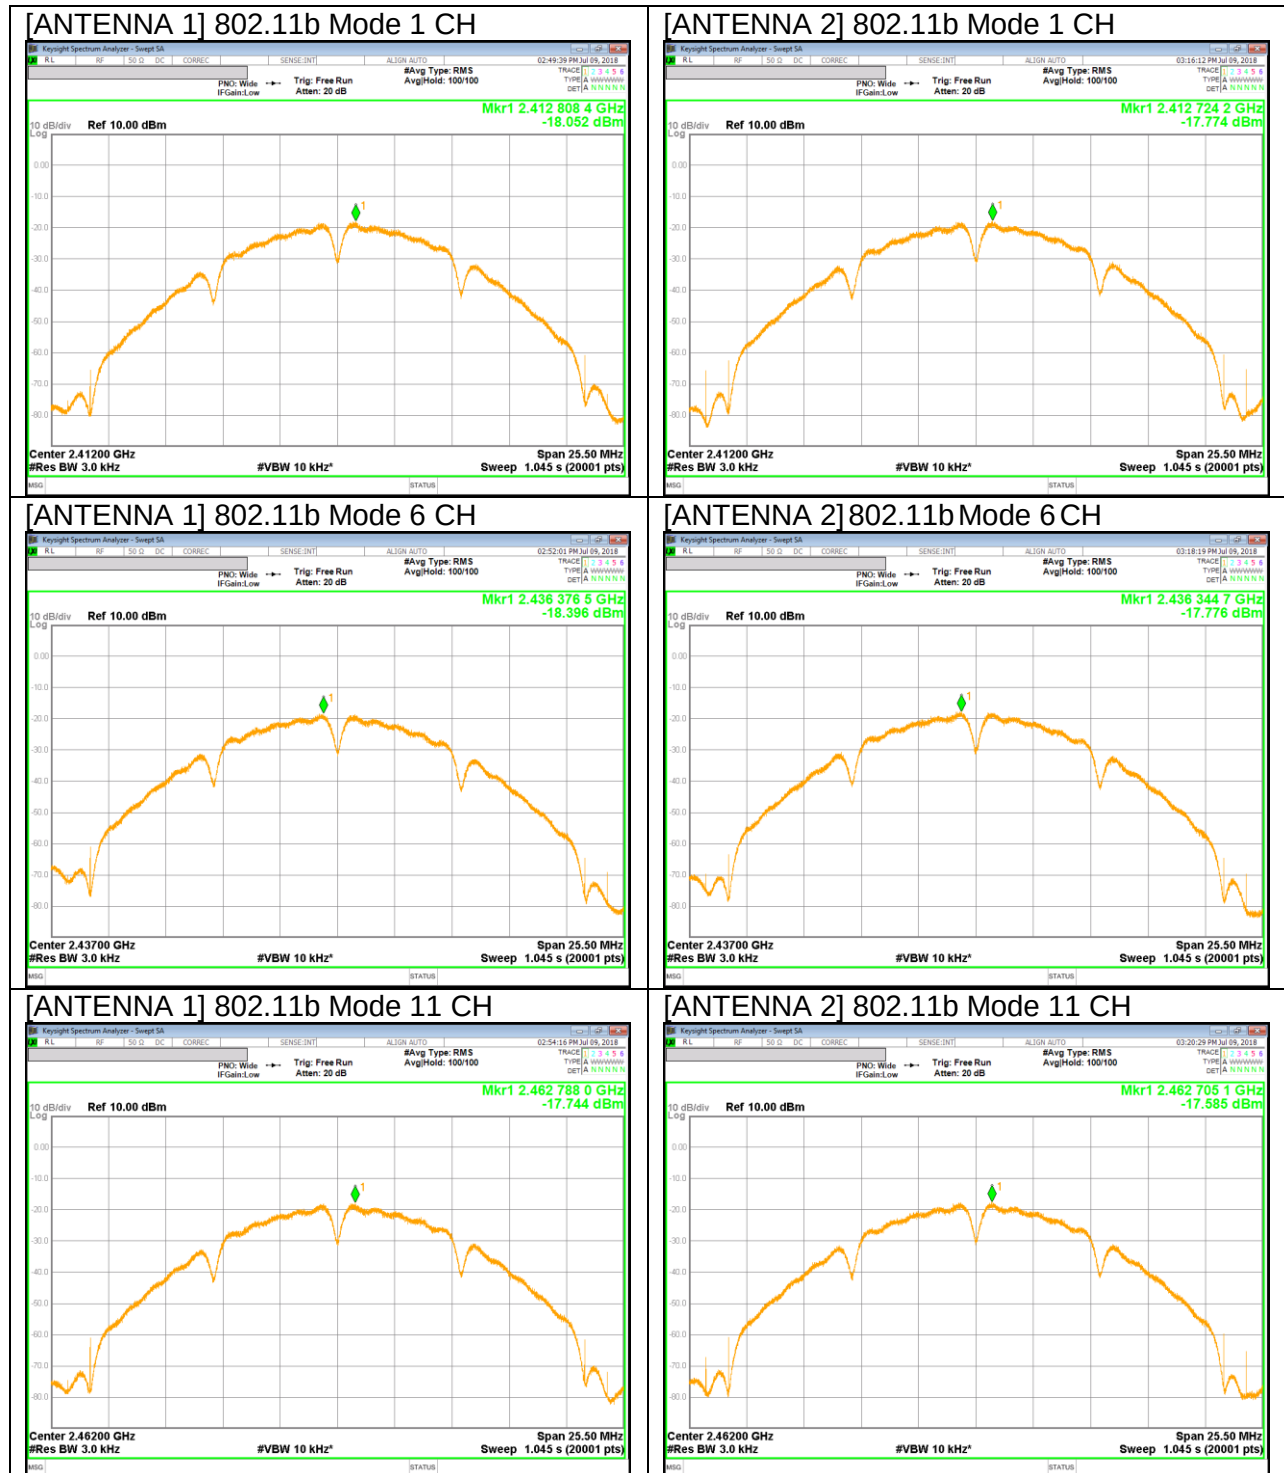


[ANTENNA 1] 802.11g Mode 1 CH




[ANTENNA 2] 802.11g Mode 1 CH

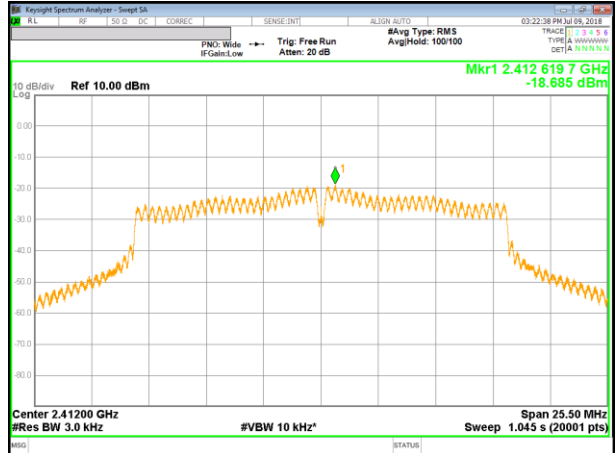


[ANTENNA 1] 802.11g Mode 6 CH

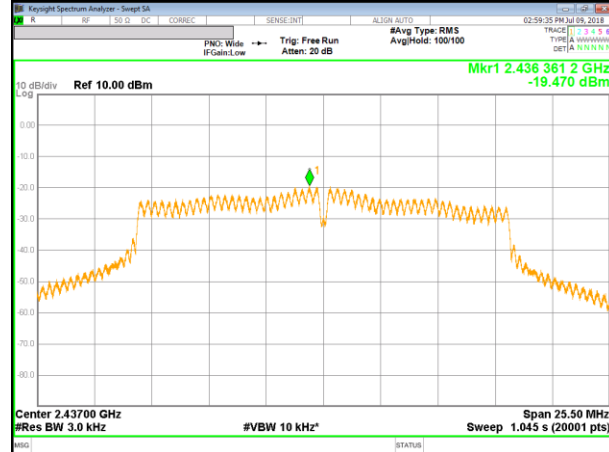


[ANTENNA 2] 802.11g Mode 6 CH

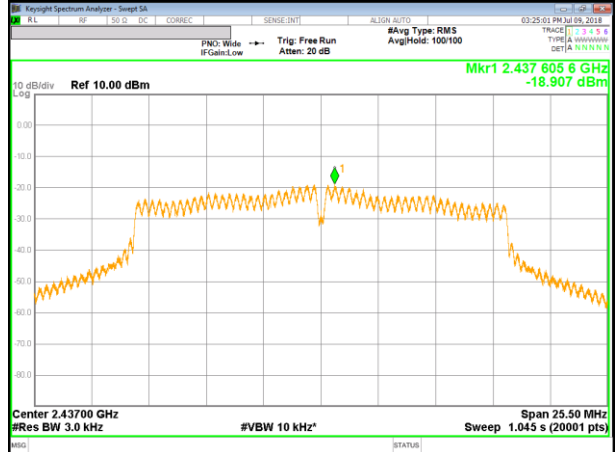

[ANTENNA 1] 802.11g Mode 11 CH

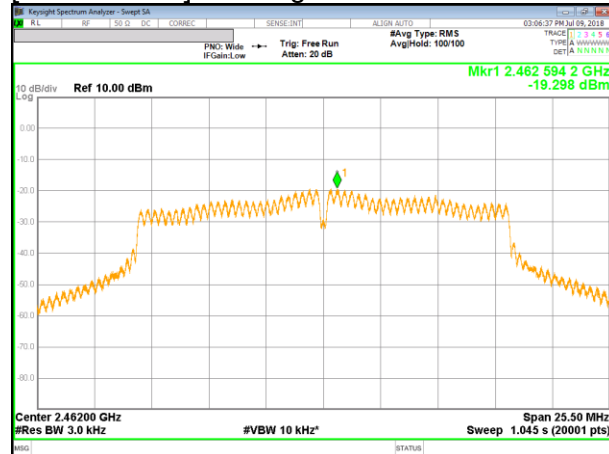

[ANTENNA 2] 802.11g Mode 11 CH

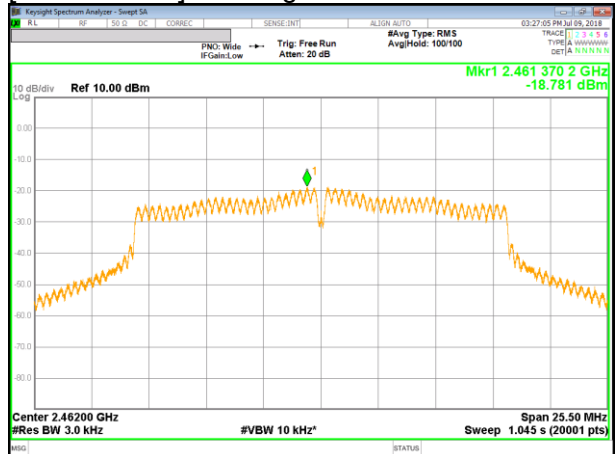



10.4. OUT-OF-BAND EMISSIONS

LIMITS

FCC §15.247 (d)


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.


TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer with RBW = 100 kHz, VBW = 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, bandedge (where measurements to the general radiated limits will not be made) and out-of-band emissions.


RESULTS


10.4.1. 802.11b MODE IN THE 2.4 GHz BAND

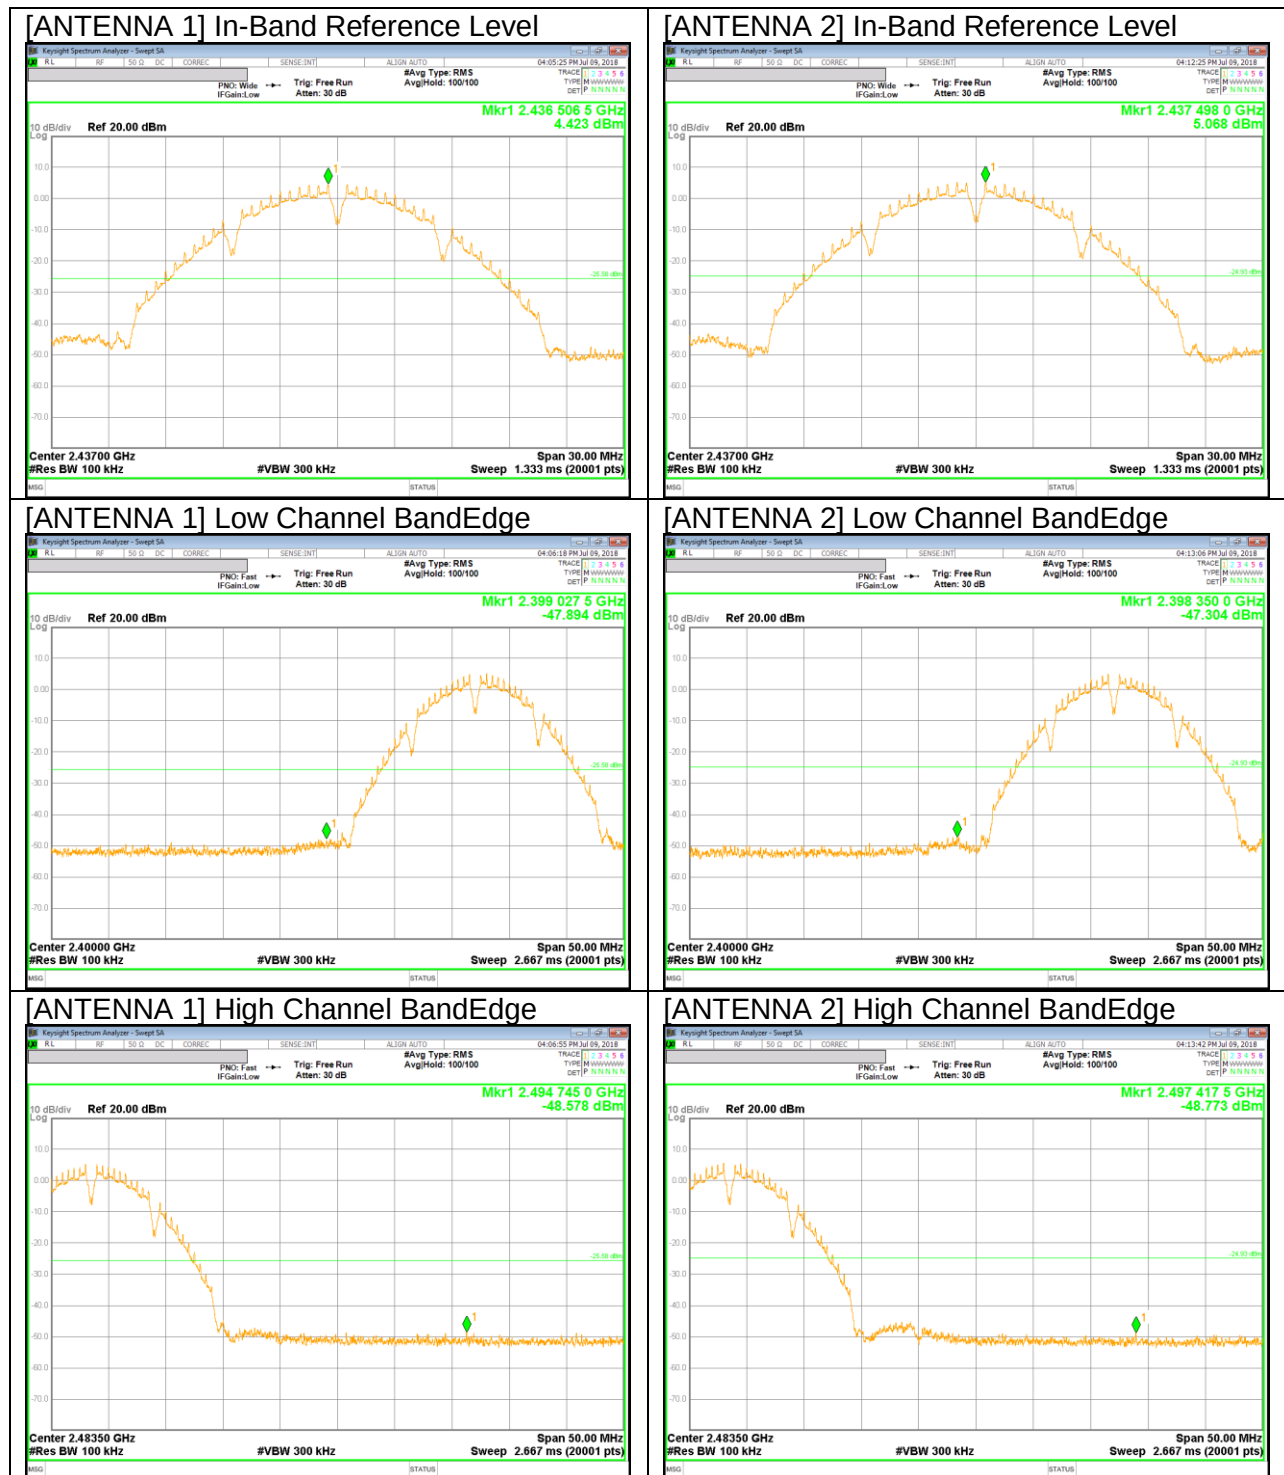

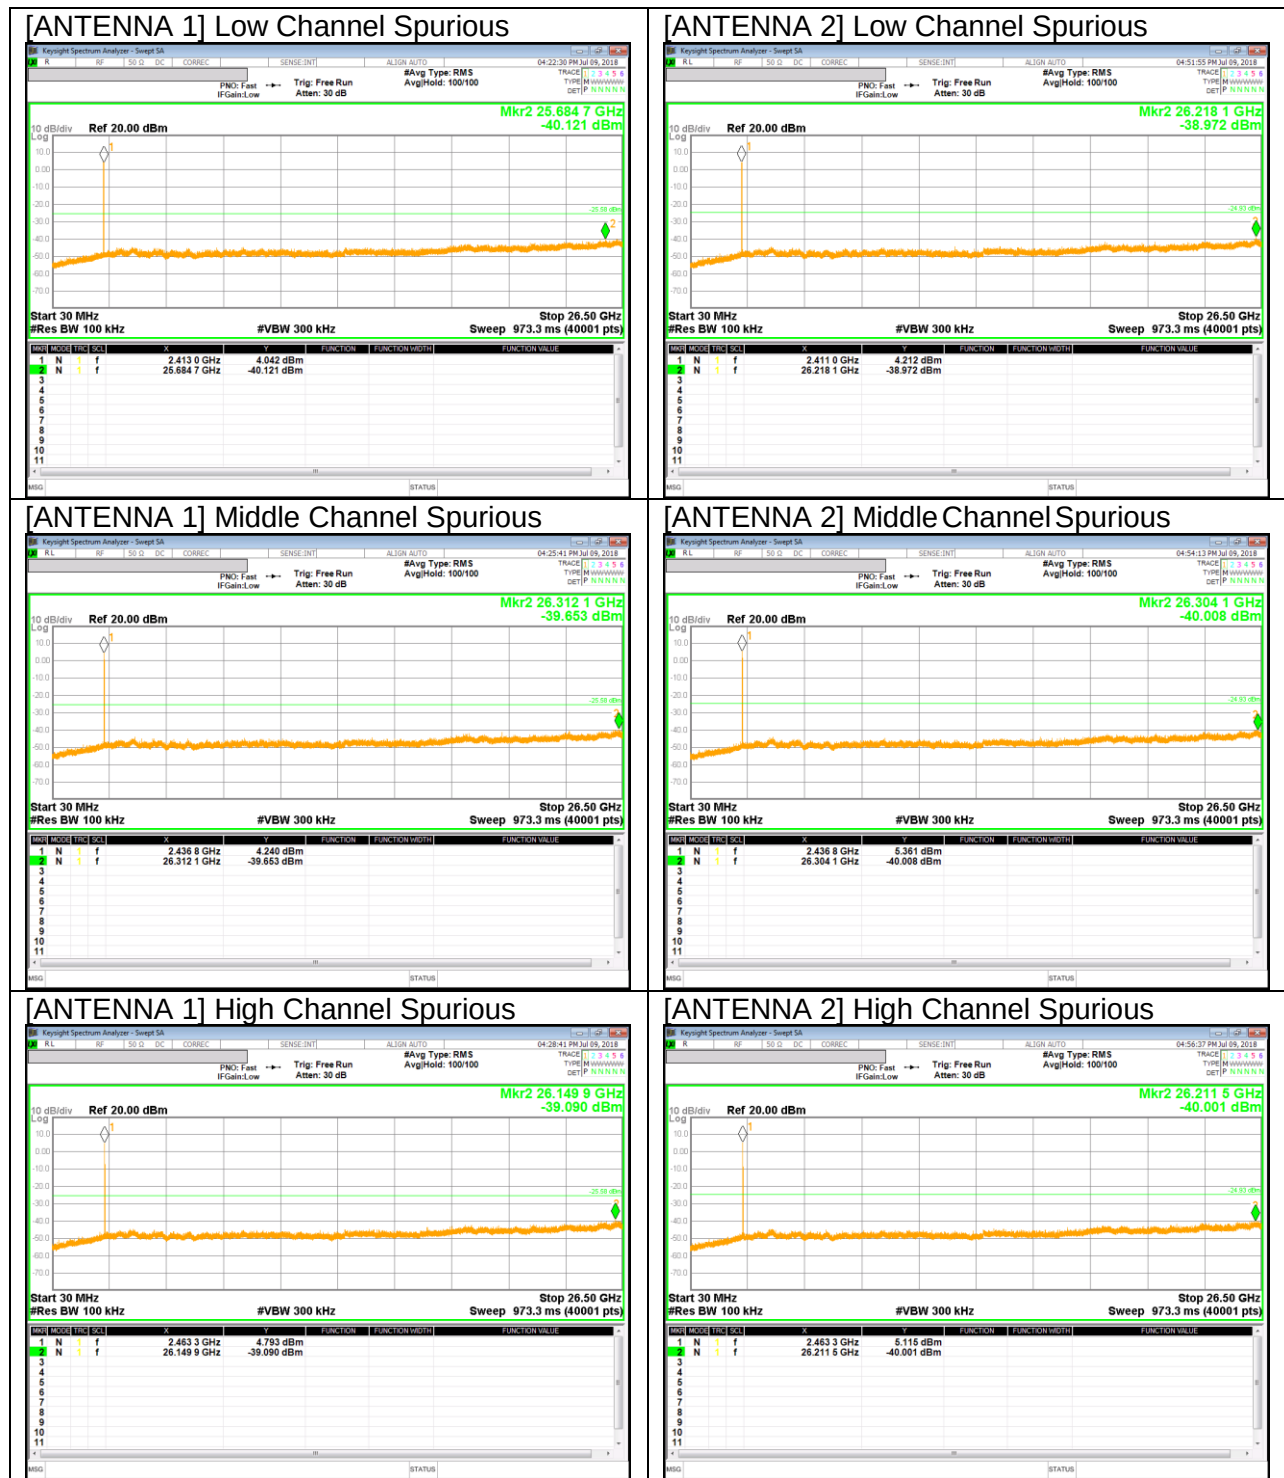

10.4.2. 802.11g MODE IN THE 2.4 GHz BAND

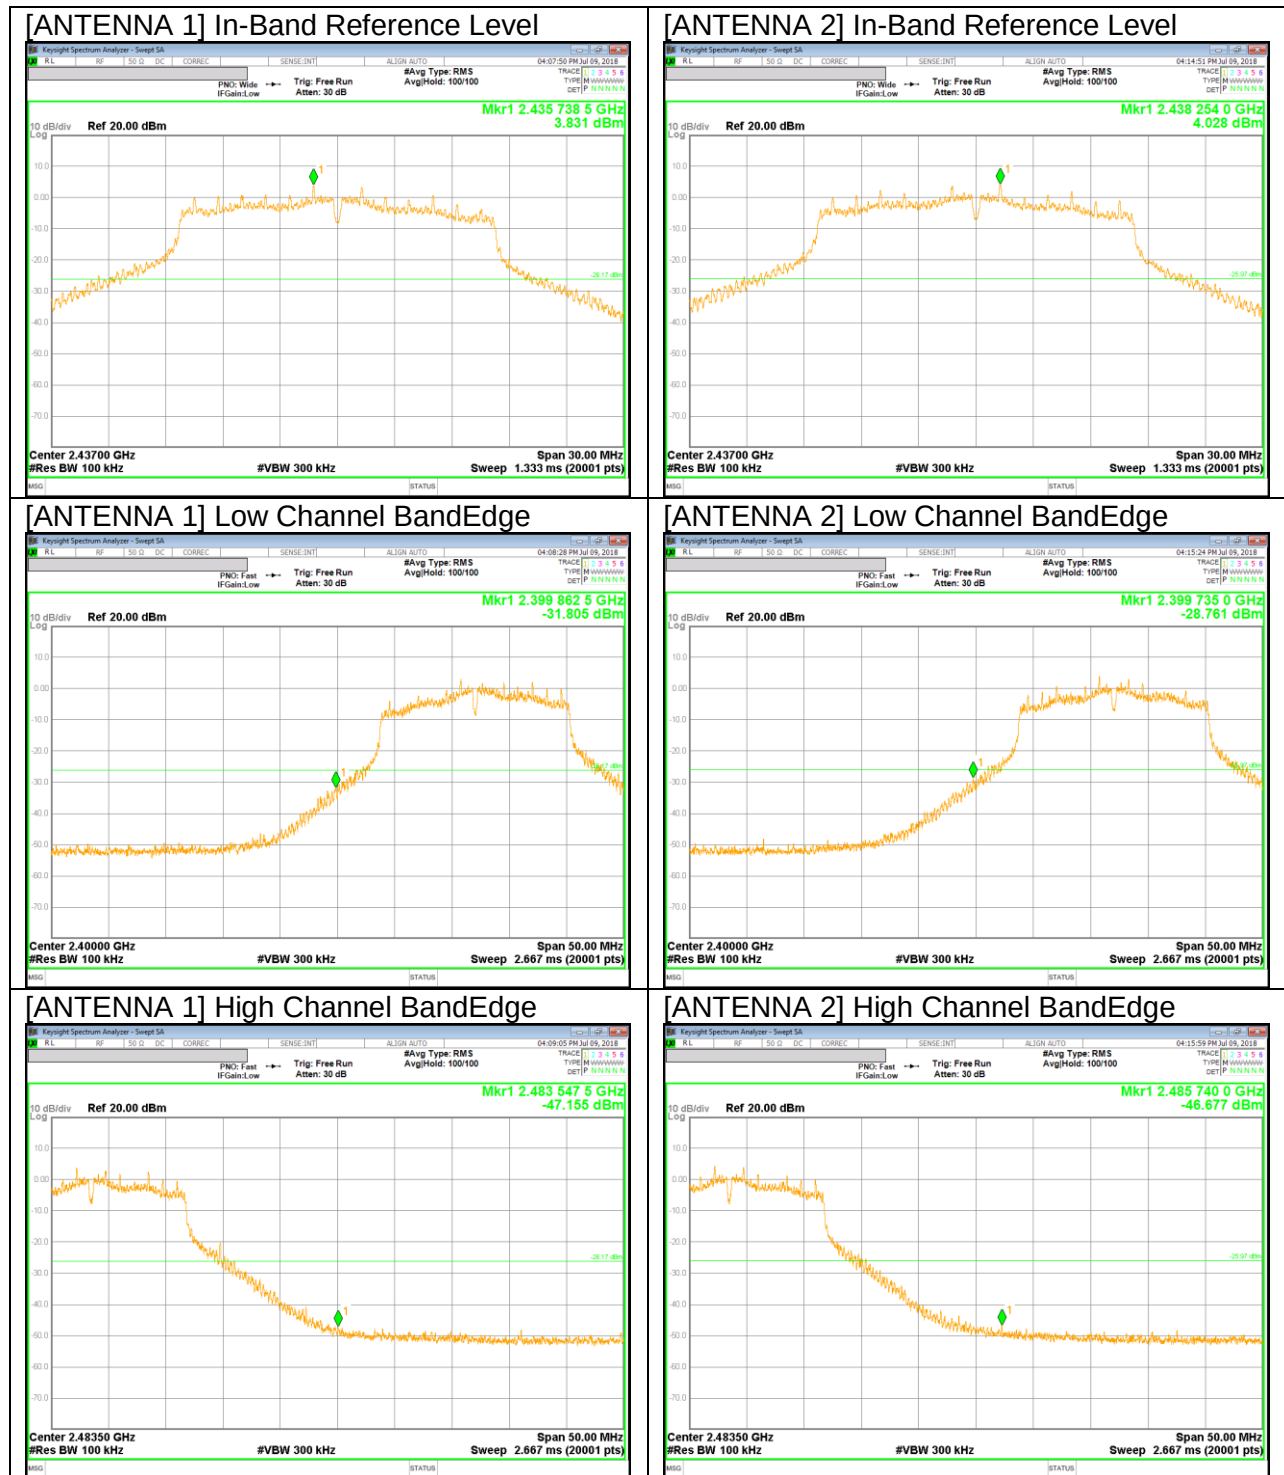



10.4.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

