



## SAR EVALUATION REPORT

**Applicant Name:**

Samsung Electronics Co., Ltd.  
129, Samsung-ro, Maetan dong,  
Yeongtong-gu, Suwon-si  
Gyeonggi-do, 16677, Korea

**Date of Testing:**

06/11/18 - 06/26/18

**Test Site/Location:**

PCTEST Lab, Columbia, MD, USA

**Document Serial No.:**

1M1806060119-01.A3L

**FCC ID:**

**A3LSMT837P**

**APPLICANT:**

**SAMSUNG ELECTRONICS CO., LTD.**

**DUT Type:**

Portable Tablet

**Application Type:**

Certification

**FCC Rule Part(s):**

CFR §2.1093

**Model:**

SM-T837P

| Equipment Class                                   | Band & Mode            | Tx Frequency          | SAR            |
|---------------------------------------------------|------------------------|-----------------------|----------------|
|                                                   |                        |                       | 1g Body (W/kg) |
| PCB                                               | CDMA/EVDO BC10 (\$90S) | 817.90 - 823.10 MHz   | 1.25           |
| PCB                                               | CDMA/EVDO BC0 (\$22H)  | 824.70 - 848.31 MHz   | 1.37           |
| PCB                                               | PCS CDMA/EVDO          | 1851.25 - 1908.75 MHz | 1.09           |
| PCB                                               | LTE Band 12            | 699.7 - 715.3 MHz     | 0.73           |
| PCB                                               | LTE Band 13            | 779.5 - 784.5 MHz     | 1.07           |
| PCB                                               | LTE Band 26 (Cell)     | 814.7 - 848.3 MHz     | 1.35           |
| PCB                                               | LTE Band 5 (Cell)      | 824.7 - 848.3 MHz     | 1.40           |
| PCB                                               | LTE Band 4 (AWS)       | 1710.7 - 1754.3 MHz   | 1.37           |
| PCB                                               | LTE Band 25 (PCS)      | 1850.7 - 1914.3 MHz   | 1.18           |
| PCB                                               | LTE Band 2 (PCS)       | 1850.7 - 1909.3 MHz   | N/A            |
| PCB                                               | LTE Band 7             | 2502.5 - 2567.5 MHz   | 0.91           |
| PCB                                               | LTE Band 41            | 2498.5 - 2687.5 MHz   | 1.07           |
| DTS                                               | 2.4 GHz WLAN           | 2412 - 2462 MHz       | 0.59           |
| NII                                               | U-NII-1                | 5180 - 5240 MHz       | N/A            |
| NII                                               | U-NII-2A               | 5260 - 5320 MHz       | 0.86           |
| NII                                               | U-NII-2C               | 5500 - 5720 MHz       | 1.01           |
| NII                                               | U-NII-3                | 5745 - 5825 MHz       | 1.18           |
| DSS/DTS                                           | Bluetooth              | 2402 - 2480 MHz       | 0.50           |
| <b>Simultaneous SAR per KDB 690783 D01v01r03:</b> |                        |                       | <b>1.59</b>    |

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.7 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.

  
Randy Ortanez  
President



The SAR Tick is an initiative of the Mobile & Wireless Forum (MWF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MWF. Further details can be obtained by emailing: [sartick@mwfai.info](mailto:sartick@mwfai.info).

|                                             |                                                                                     |                                     |                                                                                       |                                        |
|---------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> A3LSMT837P                   |  | <b>SAR EVALUATION REPORT</b>        |  | <b>Approved by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>1M1806060119-01.A3L | <b>Test Dates:</b><br>06/11/18 - 06/26/18                                           | <b>DUT Type:</b><br>Portable Tablet | Page 1 of 100                                                                         |                                        |

# T A B L E   O F   C O N T E N T S

|                                                              |                                                  |    |
|--------------------------------------------------------------|--------------------------------------------------|----|
| 1                                                            | DEVICE UNDER TEST .....                          | 3  |
| 2                                                            | LTE INFORMATION .....                            | 11 |
| 3                                                            | INTRODUCTION .....                               | 12 |
| 4                                                            | DOSIMETRIC ASSESSMENT .....                      | 13 |
| 5                                                            | TEST CONFIGURATION POSITIONS .....               | 14 |
| 6                                                            | RF EXPOSURE LIMITS .....                         | 15 |
| 7                                                            | FCC MEASUREMENT PROCEDURES.....                  | 16 |
| 8                                                            | RF CONDUCTED POWERS.....                         | 21 |
| 9                                                            | SYSTEM VERIFICATION.....                         | 67 |
| 10                                                           | SAR DATA SUMMARY .....                           | 69 |
| 11                                                           | FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS..... | 78 |
| 12                                                           | SAR MEASUREMENT VARIABILITY .....                | 94 |
| 13                                                           | ADDITIONAL TESTING PER FCC GUIDANCE .....        | 95 |
| 14                                                           | EQUIPMENT LIST.....                              | 96 |
| 15                                                           | MEASUREMENT UNCERTAINTIES.....                   | 97 |
| 16                                                           | CONCLUSION.....                                  | 98 |
| 17                                                           | REFERENCES .....                                 | 99 |
| APPENDIX A: SAR TEST PLOTS                                   |                                                  |    |
| APPENDIX B: SAR DIPOLE VERIFICATION PLOTS                    |                                                  |    |
| APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES        |                                                  |    |
| APPENDIX D: SAR TISSUE SPECIFICATIONS                        |                                                  |    |
| APPENDIX E: SAR SYSTEM VALIDATION                            |                                                  |    |
| APPENDIX F: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS |                                                  |    |
| APPENDIX G: POWER REDUCTION VERIFICATION                     |                                                  |    |
| APPENDIX H: DOWNLINK LTE CA RF CONDUCTED POWERS              |                                                  |    |

|                                             |                                                                                                                                                                                                        |                                        |
|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> A3LSMT837P                   |  <b>SAR EVALUATION REPORT</b>  | <b>Approved by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>1M1806060119-01.A3L | <b>Test Dates:</b><br>06/11/18 - 06/26/18                                                                                                                                                              | <b>DUT Type:</b><br>Portable Tablet    |
|                                             |                                                                                                                                                                                                        | Page 2 of 100                          |

# 1 DEVICE UNDER TEST

## 1.1 Device Overview

| Band & Mode           | Operating Modes | Tx Frequency          |
|-----------------------|-----------------|-----------------------|
| CDMA/EVDO BC10 (§90S) | Data            | 817.90 - 823.10 MHz   |
| CDMA/EVDO BC0 (§22H)  | Data            | 824.70 - 848.31 MHz   |
| PCS CDMA/EVDO         | Data            | 1851.25 - 1908.75 MHz |
| LTE Band 12           | Data            | 699.7 - 715.3 MHz     |
| LTE Band 13           | Data            | 779.5 - 784.5 MHz     |
| LTE Band 26 (Cell)    | Data            | 814.7 - 848.3 MHz     |
| LTE Band 5 (Cell)     | Data            | 824.7 - 848.3 MHz     |
| LTE Band 4 (AWS)      | Data            | 1710.7 - 1754.3 MHz   |
| LTE Band 25 (PCS)     | Data            | 1850.7 - 1914.3 MHz   |
| LTE Band 2 (PCS)      | Data            | 1850.7 - 1909.3 MHz   |
| LTE Band 7            | Data            | 2502.5 - 2567.5 MHz   |
| LTE Band 41           | Data            | 2498.5 - 2687.5 MHz   |
| 2.4 GHz WLAN          | Data            | 2412 - 2462 MHz       |
| U-NII-1               | Data            | 5180 - 5240 MHz       |
| U-NII-2A              | Data            | 5260 - 5320 MHz       |
| U-NII-2C              | Data            | 5500 - 5720 MHz       |
| U-NII-3               | Data            | 5745 - 5825 MHz       |
| Bluetooth             | Data            | 2402 - 2480 MHz       |
| ANT+                  | Data            | 2402 - 2480 MHz       |

## 1.2 Power Reduction for SAR

This device uses a power reduction mechanism for SAR compliance. The power reduction mechanism is activated when the device is used in close proximity to the user's body. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device. Detailed descriptions of the power reduction mechanism are included in the operational description.

|                                             |                                                                                                                                                                                                        |                                        |
|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> A3LSMT837P                   |  <b>SAR EVALUATION REPORT</b>  | <b>Approved by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>1M1806060119-01.A3L | <b>Test Dates:</b><br>06/11/18 - 06/26/18                                                                                                                                                              | <b>DUT Type:</b><br>Portable Tablet    |
|                                             |                                                                                                                                                                                                        | Page 3 of 100                          |

### 1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

#### 1.3.1 Maximum PCB Output Power

| Mode / Band            |         | Modulated Average (dBm) |
|------------------------|---------|-------------------------|
| CDMA/EVDO BC10 (\$90S) | Maximum | 25.0                    |
|                        | Nominal | 24.0                    |
| CDMA/EVDO BC0 (\$22H)  | Maximum | 25.5                    |
|                        | Nominal | 24.5                    |
| PCS CDMA/EVDO          | Maximum | 25.5                    |
|                        | Nominal | 24.5                    |

| Mode / Band        |         | Modulated Average (dBm) |
|--------------------|---------|-------------------------|
| LTE Band 12        | Maximum | 25.0                    |
|                    | Nominal | 24.0                    |
| LTE Band 13        | Maximum | 24.5                    |
|                    | Nominal | 23.5                    |
| LTE Band 26 (Cell) | Maximum | 24.5                    |
|                    | Nominal | 23.5                    |
| LTE Band 5 (Cell)  | Maximum | 25.0                    |
|                    | Nominal | 24.0                    |
| LTE Band 4 (AWS)   | Maximum | 25.0                    |
|                    | Nominal | 24.0                    |
| LTE Band 25 (PCS)  | Maximum | 25.0                    |
|                    | Nominal | 24.0                    |
| LTE Band 2 (PCS)   | Maximum | 25.0                    |
|                    | Nominal | 24.0                    |
| LTE Band 7         | Maximum | 25.0                    |
|                    | Nominal | 24.0                    |
| LTE Band 41 PC3    | Maximum | 25.0                    |
|                    | Nominal | 24.0                    |
| LTE Band 41 PC2    | Maximum | 28.0                    |
|                    | Nominal | 27.0                    |

|                                      |                                                                                                                                                                                                        |                              |                                 |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  <b>SAR EVALUATION REPORT</b>  |                              | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                                                                                                                                     | DUT Type:<br>Portable Tablet | Page 4 of 100                   |

### 1.3.2 Reduced PCB Output Power

| Mode / Band            |         | Modulated Average (dBm) |
|------------------------|---------|-------------------------|
| CDMA/EVDO BC10 (\$90S) | Maximum | <b>14.0</b>             |
|                        | Nominal | <b>13.0</b>             |
| CDMA/EVDO BC0 (\$22H)  | Maximum | <b>16.0</b>             |
|                        | Nominal | <b>15.0</b>             |
| PCS CDMA/EVDO          | Maximum | <b>14.0</b>             |
|                        | Nominal | <b>13.0</b>             |

| Mode / Band        |         | Modulated Average (dBm) |
|--------------------|---------|-------------------------|
| LTE Band 12        | Maximum | <b>14.0</b>             |
|                    | Nominal | <b>13.0</b>             |
| LTE Band 13        | Maximum | <b>14.0</b>             |
|                    | Nominal | <b>13.0</b>             |
| LTE Band 26 (Cell) | Maximum | <b>14.0</b>             |
|                    | Nominal | <b>13.0</b>             |
| LTE Band 5 (Cell)  | Maximum | <b>16.0</b>             |
|                    | Nominal | <b>15.0</b>             |
| LTE Band 4 (AWS)   | Maximum | <b>13.0</b>             |
|                    | Nominal | <b>12.0</b>             |
| LTE Band 25 (PCS)  | Maximum | <b>14.0</b>             |
|                    | Nominal | <b>13.0</b>             |
| LTE Band 2 (PCS)   | Maximum | <b>13.5</b>             |
|                    | Nominal | <b>12.5</b>             |
| LTE Band 7         | Maximum | <b>13.0</b>             |
|                    | Nominal | <b>12.0</b>             |
| LTE Band 41 PC3    | Maximum | <b>15.0</b>             |
|                    | Nominal | <b>14.0</b>             |
| LTE Band 41 PC2    | Maximum | <b>15.0</b>             |
|                    | Nominal | <b>14.0</b>             |

|                                             |                                                                                     |                                     |                                                                                       |                                        |
|---------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> A3LSMT837P                   |  | <b>SAR EVALUATION REPORT</b>        |  | <b>Approved by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>1M1806060119-01.A3L | <b>Test Dates:</b><br>06/11/18 - 06/26/18                                           | <b>DUT Type:</b><br>Portable Tablet | Page 5 of 100                                                                         |                                        |

### 1.3.3 Maximum WLAN and Bluetooth Output Power

| Mode / Band            |         | Modulated Average - Single Tx Chain (dBm) |
|------------------------|---------|-------------------------------------------|
| IEEE 802.11b (2.4 GHz) | Maximum | 14.0                                      |
|                        | Nominal | 13.0                                      |
| IEEE 802.11g (2.4 GHz) | Maximum | 14.0                                      |
|                        | Nominal | 13.0                                      |
| IEEE 802.11n (2.4 GHz) | Maximum | 14.0                                      |
|                        | Nominal | 13.0                                      |

| Mode / Band           |         | Modulated Average - Single Tx Chain (dBm) |                  |                  |
|-----------------------|---------|-------------------------------------------|------------------|------------------|
|                       |         | 20 MHz Bandwidth                          | 40 MHz Bandwidth | 80 MHz Bandwidth |
| IEEE 802.11a (5 GHz)  | Maximum | 14.0                                      |                  |                  |
|                       | Nominal | 13.0                                      |                  |                  |
| IEEE 802.11n (5 GHz)  | Maximum | 14.0                                      | 14.0             |                  |
|                       | Nominal | 13.0                                      | 13.0             |                  |
| IEEE 802.11ac (5 GHz) | Maximum | 13.0                                      | 13.0             | 13.0             |
|                       | Nominal | 12.0                                      | 12.0             | 12.0             |

| Mode / Band            |         | Modulated Average - MIMO (dBm) |
|------------------------|---------|--------------------------------|
| IEEE 802.11n (2.4 GHz) | Maximum | 17.0                           |
|                        | Nominal | 16.0                           |
| IEEE 802.11g (2.4 GHz) | Maximum | 17.0                           |
|                        | Nominal | 16.0                           |

| Mode / Band           |         | Modulated Average - MIMO (dBm) |                  |                  |
|-----------------------|---------|--------------------------------|------------------|------------------|
|                       |         | 20 MHz Bandwidth               | 40 MHz Bandwidth | 80 MHz Bandwidth |
| IEEE 802.11a (5 GHz)  | Maximum | 17.0                           |                  |                  |
|                       | Nominal | 16.0                           |                  |                  |
| IEEE 802.11n (5 GHz)  | Maximum | 17.0                           | 17.0             |                  |
|                       | Nominal | 16.0                           | 16.0             |                  |
| IEEE 802.11ac (5 GHz) | Maximum | 16.0                           | 16.0             | 16.0             |
|                       | Nominal | 15.0                           | 15.0             | 15.0             |

| Mode / Band  |         | Modulated Average - Single Tx Chain (dBm) |
|--------------|---------|-------------------------------------------|
| Bluetooth    | Maximum | 9.5                                       |
|              | Nominal | 8.5                                       |
| Bluetooth LE | Maximum | 2.6                                       |
|              | Nominal | 1.6                                       |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | SAR EVALUATION REPORT        |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet | Page 6 of 100                                                                         |                                 |

### 1.3.4 Reduced WLAN Output Power

| Mode / Band            |         | Modulated Average - Single Tx Chain (dBm) |
|------------------------|---------|-------------------------------------------|
| IEEE 802.11b (2.4 GHz) | Maximum | 13.0                                      |
|                        | Nominal | 12.0                                      |
| IEEE 802.11g (2.4 GHz) | Maximum | 13.0                                      |
|                        | Nominal | 12.0                                      |
| IEEE 802.11n (2.4 GHz) | Maximum | 13.0                                      |
|                        | Nominal | 12.0                                      |

| Mode / Band           |         | Modulated Average - Single Tx Chain (dBm) |                  |                  |
|-----------------------|---------|-------------------------------------------|------------------|------------------|
|                       |         | 20 MHz Bandwidth                          | 40 MHz Bandwidth | 80 MHz Bandwidth |
| IEEE 802.11a (5 GHz)  | Maximum | 10.0                                      |                  |                  |
|                       | Nominal | 9.0                                       |                  |                  |
| IEEE 802.11n (5 GHz)  | Maximum | 10.0                                      | 10.0             |                  |
|                       | Nominal | 9.0                                       | 9.0              |                  |
| IEEE 802.11ac (5 GHz) | Maximum | 10.0                                      | 10.0             | 10.0             |
|                       | Nominal | 9.0                                       | 9.0              | 9.0              |

| Mode / Band            |         | Modulated Average - MIMO (dBm) |
|------------------------|---------|--------------------------------|
| IEEE 802.11n (2.4 GHz) | Maximum | 16.0                           |
|                        | Nominal | 15.0                           |
| IEEE 802.11g (2.4 GHz) | Maximum | 16.0                           |
|                        | Nominal | 15.0                           |

| Mode / Band           |         | Modulated Average - MIMO (dBm) |                  |                  |
|-----------------------|---------|--------------------------------|------------------|------------------|
|                       |         | 20 MHz Bandwidth               | 40 MHz Bandwidth | 80 MHz Bandwidth |
| IEEE 802.11a (5 GHz)  | Maximum | 13.0                           |                  |                  |
|                       | Nominal | 12.0                           |                  |                  |
| IEEE 802.11n (5 GHz)  | Maximum | 13.0                           | 13.0             |                  |
|                       | Nominal | 12.0                           | 12.0             |                  |
| IEEE 802.11ac (5 GHz) | Maximum | 13.0                           | 13.0             | 13.0             |
|                       | Nominal | 12.0                           | 12.0             | 12.0             |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | SAR EVALUATION REPORT        |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet | Page 7 of 100                                                                         |                                 |

## 1.4 DUT Antenna Locations

The overall diagonal dimension of the device is > 200 mm. A diagram showing the location of the device antennas can be found in Appendix F. Exact antenna dimensions and separation distances are shown in the Technical Descriptions in the FCC filings.

**Table 1-1**  
**Device Edges/Sides for SAR Testing**

| Mode               | Back | Top | Bottom | Right | Left |
|--------------------|------|-----|--------|-------|------|
| EVDO BC10 (§90S)   | Yes  | Yes | No     | Yes   | Yes  |
| EVDO BC0 (§22H)    | Yes  | Yes | No     | Yes   | Yes  |
| PCS EVDO           | Yes  | Yes | No     | Yes   | Yes  |
| LTE Band 12        | Yes  | Yes | No     | Yes   | Yes  |
| LTE Band 13        | Yes  | Yes | No     | Yes   | Yes  |
| LTE Band 26 (Cell) | Yes  | Yes | No     | Yes   | Yes  |
| LTE Band 5 (Cell)  | Yes  | Yes | No     | Yes   | Yes  |
| LTE Band 4 (AWS)   | Yes  | Yes | No     | Yes   | Yes  |
| LTE Band 25 (PCS)  | Yes  | Yes | No     | Yes   | Yes  |
| LTE Band 7         | Yes  | Yes | No     | Yes   | Yes  |
| LTE Band 41        | Yes  | Yes | No     | Yes   | Yes  |
| 2.4 GHz WLAN Ant 1 | Yes  | Yes | Yes    | Yes   | No   |
| 2.4 GHz WLAN Ant 2 | Yes  | Yes | Yes    | Yes   | Yes  |
| 5 GHz WLAN Ant 1   | Yes  | Yes | Yes    | Yes   | No   |
| 5 GHz WLAN Ant 2   | Yes  | Yes | Yes    | Yes   | Yes  |
| Bluetooth          | Yes  | Yes | Yes    | Yes   | No   |

Note: Per FCC KDB Publication 616217 D04v01r01, particular edges were not required to be evaluated for SAR based on the SAR exclusion threshold in KDB 447498 D01V06. Additional edges may have been evaluated for simultaneous transmission analysis.

|                                             |                                                                                     |                                     |                                                                                       |                                        |
|---------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> A3LSMT837P                   |  | <b>SAR EVALUATION REPORT</b>        |  | <b>Approved by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>1M1806060119-01.A3L | <b>Test Dates:</b><br>06/11/18 - 06/26/18                                           | <b>DUT Type:</b><br>Portable Tablet | Page 8 of 100                                                                         |                                        |



## 1.5 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06 4.3.2 procedures.

**Table 1-2**  
**Simultaneous Transmission Scenarios**

| No. | Capable Transmit Configuration                           | Body |
|-----|----------------------------------------------------------|------|
| 1   | LTE + 2.4 GHz WI-FI                                      | Yes  |
| 2   | LTE + 5 GHz WI-FI                                        | Yes  |
| 3   | LTE + 2.4 GHz Bluetooth                                  | Yes  |
| 4   | LTE + 2.4 GHz WI-FI MIMO                                 | Yes  |
| 5   | LTE + 5 GHz WI-FI MIMO                                   | Yes  |
| 6   | LTE + 2.4 GHz WI-FI Ant 1 + 5 GHz WI-FI Ant 2            | Yes  |
| 7   | CDMA/EVDO data + 2.4 GHz WI-FI                           | Yes  |
| 8   | CDMA/EVDO data + 5 GHz WI-FI                             | Yes  |
| 9   | CDMA/EVDO data + 2.4 GHz Bluetooth                       | Yes  |
| 10  | CDMA/EVDO data + 2.4 GHz WI-FI MIMO                      | Yes  |
| 11  | CDMA/EVDO data + 5 GHz WI-FI MIMO                        | Yes  |
| 12  | CDMA/EVDO data + 2.4 GHz WI-FI Ant 1 + 5 GHz WI-FI Ant 2 | Yes  |

1. All licensed modes share the same antenna path and cannot transmit simultaneously.
2. This device supports 2x2 MIMO Tx for WLAN 802.11n/ac. 802.11a/g/n/ac supports CDD and STBC and 802.11n/ac additionally supports SDM. Each WLAN antenna can transmit independently or together when operating with MIMO.

## 1.6 Miscellaneous SAR Test Considerations

### (A) WIFI/BT

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg, SAR is not required for U-NII-1 band according to FCC KDB Publication 248227 D01v02r02.

This device supports IEEE 802.11ac with the following features:

- a) Up to 80 MHz Bandwidth only
- b) No aggregate channel configurations
- c) 2 Tx antenna output
- d) 256 QAM is supported
- e) TDWR and Band gap channels are supported

|                                             |                                                                                                                                   |                                     |                                                                                       |                                        |
|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> A3LSMT837P                   |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>SAR EVALUATION REPORT</b>        |  | <b>Approved by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>1M1806060119-01.A3L | <b>Test Dates:</b><br>06/11/18 - 06/26/18                                                                                         | <b>DUT Type:</b><br>Portable Tablet |                                                                                       | Page 9 of 100                          |

## (B) Licensed Transmitter(s)

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

This device supports LTE Carrier Aggregation (CA) in the downlink. All uplink communications are identical to Release 8 specifications. Per FCC KDB Publication 941225 D05A v01r02, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive. The downlink carrier aggregation exclusion analysis can be found in Appendix H.

This device supports downlink 4x4 MIMO operations for some LTE Bands. Per May 2017 TCB Workshop Guidance, SAR for downlink 4x4 MIMO was not needed since the maximum average output power in 4x4 downlink MIMO mode was not > 0.25 dB higher than the maximum output power with downlink 4x4 MIMO inactive.

This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE Band falls completely within an LTE band with a larger transmission frequency range, both LTE bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both LTE bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.

This device supports both Power Class 2 (PC2) and Power Class 3 (PC3) for LTE Band 41. Per May 2017 TCB Workshop Notes, SAR tests were performed with Power Class 3 (given the specific UL/DL limitations for Power Class 2). Additionally, SAR testing for the power class condition was evaluated for the highest configuration in Power Class 3 for each test configuration to confirm the results were scalable linearly (See Section 13.1).

This device supports LTE Carrier Aggregation (CA) for LTE Band 41 with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per 2017 Fall TCB Workshop Notes.

## 1.7 Guidance Applied

- FCC KDB Publication 941225 D01v03r01, D05v02r04, D05Av01r02, D06v02r01 (3G/4G)
- FCC KDB Publication 248227 D01v02r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v06 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 616217 D04v01r02 (Tablet)
- May 2017 TCB Workshop Notes (LTE 4x4 Downlink MIMO, LTE Band 41 Power Class 2/3)
- October 2017 TCB Workshop Notes (ULCA)
- April 2018 TCB Workshop Notes (LTE Carrier Aggregation)

## 1.8 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 10.

|                                             |                                                                                                                                                                                                        |                                        |
|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> A3LSMT837P                   |  <b>SAR EVALUATION REPORT</b>  | <b>Approved by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>1M1806060119-01.A3L | <b>Test Dates:</b><br>06/11/18 - 06/26/18                                                                                                                                                              | <b>DUT Type:</b><br>Portable Tablet    |
|                                             |                                                                                                                                                                                                        | Page 10 of 100                         |

## 2

## LTE INFORMATION

| LTE Information                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                |                |                |                |
|-------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|----------------|----------------|----------------|
| FCC ID                                                                                                            | A3LSMT837P                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                |                |                |                |
| Form Factor                                                                                                       | Portable Tablet                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                |                |                |                |
| Frequency Range of each LTE transmission band                                                                     | LTE Band 12 (699.7 - 715.3 MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                |                |                |                |
|                                                                                                                   | LTE Band 13 (779.5 - 784.5 MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                |                |                |                |
|                                                                                                                   | LTE Band 26 (Cell) (814.7 - 848.3 MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                |                |                |                |
|                                                                                                                   | LTE Band 5 (Cell) (824.7 - 848.3 MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                |                |                |                |
|                                                                                                                   | LTE Band 4 (AWS) (1710.7 - 1754.3 MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                |                |                |                |
|                                                                                                                   | LTE Band 25 (PCS) (1850.7 - 1914.3 MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                |                |                |                |
|                                                                                                                   | LTE Band 2 (PCS) (1850.7 - 1909.3 MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                |                |                |                |
|                                                                                                                   | LTE Band 7 (2502.5 - 2567.5 MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                |                |                |                |
| Channel Bandwidths                                                                                                | LTE Band 41 (2498.5 - 2687.5 MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                |                |                |                |
|                                                                                                                   | LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                |                |                |                |
|                                                                                                                   | LTE Band 13: 5 MHz, 10 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                |                |                |                |
|                                                                                                                   | LTE Band 26 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                             |                |                |                |                |
|                                                                                                                   | LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                |                |                |                |
|                                                                                                                   | LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                       |                |                |                |                |
|                                                                                                                   | LTE Band 25 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                      |                |                |                |                |
|                                                                                                                   | LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                       |                |                |                |                |
| Channel Numbers and Frequencies (MHz)                                                                             | LTE Band 7: 5 MHz, 10 MHz, 15 MHz, 20 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                |                |                |                |
|                                                                                                                   | LTE Band 41: 5 MHz, 10 MHz, 15 MHz, 20 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                |                |                |                |
|                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Low            | Low-Mid        | Mid            | Mid-High       |
| LTE Band 12: 1.4 MHz                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 699.7 (23017)  |                | 707.5 (23095)  | 715.3 (23173)  |
| LTE Band 12: 3 MHz                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 700.5 (23025)  |                | 707.5 (23095)  | 714.5 (23165)  |
| LTE Band 12: 5 MHz                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 701.5 (23035)  |                | 707.5 (23095)  | 713.5 (23155)  |
| LTE Band 12: 10 MHz                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 704 (23060)    |                | 707.5 (23095)  | 711 (23130)    |
| LTE Band 13: 5 MHz                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 779.5 (23205)  |                | 782 (23230)    | 784.5 (23255)  |
| LTE Band 13: 10 MHz                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | N/A            |                | 782 (23230)    | N/A            |
| LTE Band 26 (Cell): 1.4 MHz                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 814.7 (26697)  |                | 831.5 (26865)  | 848.3 (27033)  |
| LTE Band 26 (Cell): 3 MHz                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 815.5 (26705)  |                | 831.5 (26865)  | 847.5 (27025)  |
| LTE Band 26 (Cell): 5 MHz                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 816.5 (26715)  |                | 831.5 (26865)  | 846.5 (27015)  |
| LTE Band 26 (Cell): 10 MHz                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 819 (26740)    |                | 831.5 (26865)  | 844 (26990)    |
| LTE Band 26 (Cell): 15 MHz                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 821.5 (26765)  |                | 831.5 (26865)  | 841.5 (26965)  |
| LTE Band 5 (Cell): 1.4 MHz                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 824.7 (20407)  |                | 836.5 (20525)  | 848.3 (20643)  |
| LTE Band 5 (Cell): 3 MHz                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 825.5 (20415)  |                | 836.5 (20525)  | 847.5 (20635)  |
| LTE Band 5 (Cell): 5 MHz                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 826.5 (20425)  |                | 836.5 (20525)  | 846.5 (20625)  |
| LTE Band 5 (Cell): 10 MHz                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 829 (20450)    |                | 836.5 (20525)  | 844 (20600)    |
| LTE Band 4 (AWS): 1.4 MHz                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 1710.7 (19957) |                | 1732.5 (20175) | 1754.3 (20393) |
| LTE Band 4 (AWS): 3 MHz                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 1711.5 (19965) |                | 1732.5 (20175) | 1753.5 (20385) |
| LTE Band 4 (AWS): 5 MHz                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 1712.5 (19975) |                | 1732.5 (20175) | 1752.5 (20375) |
| LTE Band 4 (AWS): 10 MHz                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 1715 (20000)   |                | 1732.5 (20175) | 1750 (20350)   |
| LTE Band 4 (AWS): 15 MHz                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 1717.5 (20025) |                | 1732.5 (20175) | 1747.5 (20325) |
| LTE Band 4 (AWS): 20 MHz                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 1720 (20050)   |                | 1732.5 (20175) | 1745 (20300)   |
| LTE Band 25 (PCS): 1.4 MHz                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 1850.7 (26047) |                | 1882.5 (26365) | 1914.3 (26683) |
| LTE Band 25 (PCS): 3 MHz                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 1851.5 (26055) |                | 1882.5 (26365) | 1913.5 (26675) |
| LTE Band 25 (PCS): 5 MHz                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 1852.5 (26065) |                | 1882.5 (26365) | 1912.5 (26665) |
| LTE Band 25 (PCS): 10 MHz                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 1855 (26090)   |                | 1882.5 (26365) | 1910 (26640)   |
| LTE Band 25 (PCS): 15 MHz                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 1857.5 (26115) |                | 1882.5 (26365) | 1907.5 (26615) |
| LTE Band 25 (PCS): 20 MHz                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 1860 (26140)   |                | 1882.5 (26365) | 1905 (26590)   |
| LTE Band 2 (PCS): 1.4 MHz                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 1850.7 (18607) |                | 1880 (18900)   | 1909.3 (19193) |
| LTE Band 2 (PCS): 3 MHz                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 1851.5 (18615) |                | 1880 (18900)   | 1908.5 (19185) |
| LTE Band 2 (PCS): 5 MHz                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 1852.5 (18625) |                | 1880 (18900)   | 1907.5 (19175) |
| LTE Band 2 (PCS): 10 MHz                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 1855 (18650)   |                | 1880 (18900)   | 1905 (19150)   |
| LTE Band 2 (PCS): 15 MHz                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 1857.5 (18675) |                | 1880 (18900)   | 1902.5 (19125) |
| LTE Band 2 (PCS): 20 MHz                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 1860 (18700)   |                | 1880 (18900)   | 1900 (19100)   |
| LTE Band 7: 5 MHz                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 2502.5 (20775) |                | 2535 (21100)   | 2567.5 (21425) |
| LTE Band 7: 10 MHz                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 2505 (20800)   |                | 2535 (21100)   | 2565 (21400)   |
| LTE Band 7: 15 MHz                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 2507.5 (20825) |                | 2535 (21100)   | 2562.5 (21375) |
| LTE Band 7: 20 MHz                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 2510 (20850)   |                | 2535 (21100)   | 2560 (21350)   |
| LTE Band 41: 5 MHz                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 2506 (39750)   | 2549.5 (40185) | 2593 (40620)   | 2636.5 (41055) |
| LTE Band 41: 10 MHz                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 2506 (39750)   | 2549.5 (40185) | 2593 (40620)   | 2636.5 (41055) |
| LTE Band 41: 15 MHz                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 2506 (39750)   | 2549.5 (40185) | 2593 (40620)   | 2636.5 (41055) |
| LTE Band 41: 20 MHz                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 2506 (39750)   | 2549.5 (40185) | 2593 (40620)   | 2636.5 (41055) |
| UE Category                                                                                                       | DL UE Cat 13 (QPSK, 16QAM, 64QAM, 256QAM)<br>UL UE Cat 5 (QPSK, 16QAM, 64QAM)                                                                                                                                                                                                                                                                                                                                                                                                                         |                |                |                |                |
| Modulations Supported in UL                                                                                       | QPSK, 16QAM, 64QAM                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                |                |                |                |
| LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided) | YES                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                |                |                |                |
| A-MPR (Additional MPR) disabled for SAR Testing?                                                                  | YES                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                |                |                |                |
| LTE Carrier Aggregation Possible Combinations                                                                     | The technical description includes all the possible carrier aggregation combinations                                                                                                                                                                                                                                                                                                                                                                                                                  |                |                |                |                |
| LTE Additional Information                                                                                        | LTE Release 14 Information and this device does not support full CA features on 3GPP Release 14. It supports carrier aggregation and downlink MIMO features as shown in Section 9 and Appendix H. All other uplink communications are identical to the Release 8 specifications. Uplink communications are done on the PCC unless otherwise specified. The following LTE Release 14 Features are not supported: Relay, HetNet, Enhanced eCIC, MDH, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA. |                |                |                |                |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | SAR EVALUATION REPORT        |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 11 of 100                  |

### 3 INTRODUCTION

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

#### 3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

**Equation 3-1**  
**SAR Mathematical Equation**

$$SAR = \frac{d}{dt} \left( \frac{dU}{dm} \right) = \frac{d}{dt} \left( \frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m<sup>3</sup>)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

|                                      |                                                                                                                                                                                                        |                                 |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  <b>SAR EVALUATION REPORT</b>  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                                                                                                                                     | DUT Type:<br>Portable Tablet    |
|                                      |                                                                                                                                                                                                        | Page 12 of 100                  |

## 4 DOSIMETRIC ASSESSMENT

### 4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
  - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
  - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
  - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




**Figure 4-1**  
Sample SAR Area Scan

**Table 4-1**  
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04\*

| Frequency | Maximum Area Scan Resolution (mm)<br>( $\Delta x_{\text{area}}, \Delta y_{\text{area}}$ ) | Maximum Zoom Scan Resolution (mm)<br>( $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$ ) | Maximum Zoom Scan Spatial Resolution (mm) |                               |                                      | Minimum Zoom Scan Volume (mm)<br>(x,y,z) |
|-----------|-------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|-------------------------------------------|-------------------------------|--------------------------------------|------------------------------------------|
|           |                                                                                           |                                                                                           | Uniform Grid                              | Graded Grid                   |                                      |                                          |
|           |                                                                                           |                                                                                           | $\Delta z_{\text{zoom}}(n)$               | $\Delta z_{\text{zoom}}(1)^*$ | $\Delta z_{\text{zoom}}(n>1)^*$      |                                          |
| ≤ 2 GHz   | ≤ 15                                                                                      | ≤ 8                                                                                       | ≤ 5                                       | ≤ 4                           | ≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$ | ≥ 30                                     |
| 2-3 GHz   | ≤ 12                                                                                      | ≤ 5                                                                                       | ≤ 5                                       | ≤ 4                           | ≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$ | ≥ 30                                     |
| 3-4 GHz   | ≤ 12                                                                                      | ≤ 5                                                                                       | ≤ 4                                       | ≤ 3                           | ≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$ | ≥ 28                                     |
| 4-5 GHz   | ≤ 10                                                                                      | ≤ 4                                                                                       | ≤ 3                                       | ≤ 2.5                         | ≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$ | ≥ 25                                     |
| 5-6 GHz   | ≤ 10                                                                                      | ≤ 4                                                                                       | ≤ 2                                       | ≤ 2                           | ≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$ | ≥ 22                                     |

\*Also compliant to IEEE 1528-2013 Table 6

|                                      |                                                                                                                                   |                              |  |                                                                                       |                                 |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|------------------------------|--|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>SAR EVALUATION REPORT</b> |  |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                                                                | DUT Type:<br>Portable Tablet |  |                                                                                       | Page 13 of 100                  |

## 5 TEST CONFIGURATION POSITIONS

### 5.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ .

### 5.2 SAR Testing for Tablet per KDB Publication 616217 D04v01r02

Per FCC KDB Publication 616217 D04v01r02, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR Exclusion Threshold in KDB 447498 D01v06 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

### 5.3 Proximity Sensor Considerations

This device uses a power reduction mechanism to reduce output powers in certain use conditions when the device is used close the user's body.

When the device's antenna is within a certain distance of the user, the sensor activates and reduces the maximum allowed output power. However, the sensor is not active when the device is moved beyond the sensor triggering distance and the maximum output power is no longer limited. Therefore, additional evaluation is needed in the vicinity of the triggering distance to ensure SAR is compliant when the device is allowed to operate at a non-reduced output power level. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device at these additional test positions. Sensor triggering distance summary data is included in Appendix G.

The sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the sensor entirely covers the antennas.

|                                      |                                                                                                                                                                                                        |                                 |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  <b>SAR EVALUATION REPORT</b>  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                                                                                                                                     | DUT Type:<br>Portable Tablet    |
|                                      |                                                                                                                                                                                                        | Page 14 of 100                  |



## 6 RF EXPOSURE LIMITS

### 6.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### 6.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 6-1**  
**SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6**

| HUMAN EXPOSURE LIMITS                                               |                                                                           |                                                                   |
|---------------------------------------------------------------------|---------------------------------------------------------------------------|-------------------------------------------------------------------|
|                                                                     | UNCONTROLLED ENVIRONMENT<br><i>General Population</i><br>(W/kg) or (mW/g) | CONTROLLED ENVIRONMENT<br><i>Occupational</i><br>(W/kg) or (mW/g) |
| <b>Peak Spatial Average SAR</b><br>Head                             | 1.6                                                                       | 8.0                                                               |
| <b>Whole Body SAR</b>                                               | 0.08                                                                      | 0.4                                                               |
| <b>Peak Spatial Average SAR</b><br>Hands, Feet, Ankle, Wrists, etc. | 4.0                                                                       | 20                                                                |

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

|                                             |                                                                                                                                                                                                        |                                        |
|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> A3LSMT837P                   |  <b>SAR EVALUATION REPORT</b>  | <b>Approved by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>1M1806060119-01.A3L | <b>Test Dates:</b><br>06/11/18 - 06/26/18                                                                                                                                                              | <b>DUT Type:</b><br>Portable Tablet    |
|                                             |                                                                                                                                                                                                        | Page 15 of 100                         |

## 7 FCC MEASUREMENT PROCEDURES

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

### 7.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

### 7.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03r01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is  $\leq 0.25$  dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is  $\leq 1.2$  W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

### 7.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

### 7.4 SAR Measurement Conditions for CDMA2000

The following procedures were performed according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

#### 7.4.1 Output Power Verification

See 3GPP2 C.S0011/TIA-98-E as recommended by FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.” Maximum output power is verified on the High, Middle and Low channels according to procedures in section 4.4.5.2 of 3GPP2 C.S0011/TIA-98-E. SO55 tests were measured with power control bits in the “All Up” condition.

|                                      |                                                                                                                                                                                                        |                                 |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  <b>SAR EVALUATION REPORT</b>  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                                                                                                                                     | DUT Type:<br>Portable Tablet    |
|                                      |                                                                                                                                                                                                        | Page 16 of 100                  |



1. If the mobile station (MS) supports Reverse TCH RC 1 and Forward TCH RC 1, set up a call using Fundamental Channel Test Mode 1 (RC=1/1) with 9600 bps data rate only.
2. Under RC1, C.S0011 Table 4.4.5.2-1, Table 7-1 parameters were applied.
3. If the MS supports the RC 3 Reverse FCH, RC3 Reverse SCH<sub>0</sub> and demodulation of RC 3,4, or 5, set up a call using Supplemental Channel Test Mode 3 (RC 3/3) with 9600 bps Fundamental Channel and 9600 bps SCH<sub>0</sub> data rate.
4. Under RC3, C.S0011 Table 4.4.5.2-2, Table 7-2 was applied.

**Table 7-1**  
**Parameters for Max. Power for RC1**

| Parameter                    | Units        | Value |
|------------------------------|--------------|-------|
| $\frac{I_{or}}{Pilot E_c}$   | dBm/1.23 MHz | -104  |
| $\frac{I_{or}}{Traffic E_c}$ | dB           | -7    |
| $\frac{I_{or}}{Traffic E_c}$ | dB           | -7.4  |

**Table 7-2**  
**Parameters for Max. Power for RC3**

| Parameter                    | Units        | Value |
|------------------------------|--------------|-------|
| $\frac{I_{or}}{Pilot E_c}$   | dBm/1.23 MHz | -86   |
| $\frac{I_{or}}{Traffic E_c}$ | dB           | -7    |
| $\frac{I_{or}}{Traffic E_c}$ | dB           | -7.4  |

5. FCHs were configured at full rate for maximum SAR with “All Up” power control bits.

## 7.4.2 Body SAR Measurements for EVDO Body

Body SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0. The 3G SAR test reduction procedure is applied to Rev. A, Subtype 2 Physical layer configuration, with Rev. 0 as the primary mode; otherwise, SAR is measured for Rev. A using the highest reported SAR configuration for body-worn accessory exposure in Rev. 0. The AT is tested with a Reverse Data Channel rate of 153.6 kbps in Subtype 0/1 Physical Layer configurations; and a Reverse Data Channel payload size of 4096 bits and Termination Target of 16 slots in Subtype 2 Physical Layer configurations.

For EVDO data devices that also support 1x RTT voice and/or data operations, the 3G SAR test reduction procedure is applied to 1x RTT RC3 and RC1 with EVDO Rev. 0 and Rev. A as the respective primary modes. Otherwise, the ‘Body-Worn Accessory SAR’ procedures in the ‘3GPP2 CDMA 2000 1x Handsets’ section are applied.

## 7.5 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r04 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

### 7.5.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

### 7.5.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

|                                      |                                                                                                                                                                                                        |                                 |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  <b>SAR EVALUATION REPORT</b>  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                                                                                                                                     | DUT Type:<br>Portable Tablet    |
|                                      |                                                                                                                                                                                                        | Page 17 of 100                  |

### 7.5.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

### 7.5.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r04:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
  - i. The required channel and offset combination with the highest maximum output power is required for SAR.
  - ii. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
  - iii. When the reported SAR for a required test channel is  $> 1.45$  W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is  $< 0.8$  W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to  $\frac{1}{2}$  dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is  $< 1.45$  W/kg.

### 7.5.5 TDD

LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05v02r04. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05v02r04. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4.

### 7.5.6 Downlink Only Carrier Aggregation

Conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in accordance to KDB Publication 941225 D05Av01r02. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. Additional conducted output powers are measured with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band. Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for downlink only carrier aggregation configurations when the average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive.

|                                      |                                                                                                                                                                                                        |                                 |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  <b>SAR EVALUATION REPORT</b>  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                                                                                                                                     | DUT Type:<br>Portable Tablet    |
|                                      |                                                                                                                                                                                                        | Page 18 of 100                  |

## 7.6 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

### 7.6.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

### 7.6.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is  $> 1.2$  W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is  $> 1.2$  W/kg.

### 7.6.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. Each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

### 7.6.4 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is  $> 0.8$  W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.

|                                      |                                                                                                                                                                                                        |                                 |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  <b>SAR EVALUATION REPORT</b>  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                                                                                                                                     | DUT Type:<br>Portable Tablet    |
|                                      |                                                                                                                                                                                                        | Page 19 of 100                  |

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is  $> 1.2$  W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

## 7.6.5 OFDM Transmission Mode and SAR Test Channel Selection

When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

## 7.6.6 Initial Test Configuration Procedure

For OFDM, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order IEEE 802.11 mode. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is  $\leq 0.8$  W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is  $\leq 1.2$  W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 7.6.5).

## 7.6.7 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is  $\leq 1.2$  W/kg, no additional SAR tests for the subsequent test configurations are required.

## 7.6.8 MIMO SAR considerations

Per KDB Publication 248227 D01v02r02, the simultaneous SAR provisions in KDB Publication 447498 D01v06 should be applied to determine simultaneous transmission SAR test exclusion for WIFI MIMO. If the sum of 1g single transmission chain SAR measurements is  $< 1.6$  W/kg, no additional SAR measurements for MIMO are required. Alternatively, SAR for MIMO can be measured with all antennas transmitting simultaneously at the specified maximum output power of MIMO operation.

|                                      |                                                                                                                                   |                              |                                                                                       |                                 |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT        |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                                                                | DUT Type:<br>Portable Tablet |                                                                                       | Page 20 of 100                  |

## 8 RF CONDUCTED POWERS

### 8.1 CDMA Conducted Powers

**Table 8-1**  
**Maximum Conducted Power**

| Band     | Channel | Rule Part | Frequency | TDSO SO32 [dBm] | TDSO SO32 [dBm] | 1x EvDO Rev. 0 [dBm] | 1x EvDO Rev. A [dBm] |
|----------|---------|-----------|-----------|-----------------|-----------------|----------------------|----------------------|
|          | F-RC    |           | MHz       | FCH+SCH         | FCH             | (RTAP)               | (RETAP)              |
| Cellular | 564     | 90S       | 820.1     | 24.80           | 24.82           | 24.65                | 24.69                |
| Cellular | 1013    | 22H       | 824.7     | 24.79           | 24.79           | 24.81                | 24.71                |
|          | 384     | 22H       | 836.52    | 24.73           | 24.74           | 24.75                | 24.65                |
|          | 777     | 22H       | 848.31    | 24.27           | 24.25           | 24.27                | 24.23                |
| PCS      | 25      | 24E       | 1851.25   | 23.98           | 23.97           | 24.01                | 23.85                |
|          | 600     | 24E       | 1880      | 23.79           | 23.81           | 23.77                | 23.72                |
|          | 1175    | 24E       | 1908.75   | 24.66           | 24.65           | 24.69                | 24.62                |

**Table 8-2**  
**Reduced Conducted Power**

| Band     | Channel | Rule Part | Frequency | TDSO SO32 [dBm] | TDSO SO32 [dBm] | 1x EvDO Rev. 0 [dBm] | 1x EvDO Rev. A [dBm] |
|----------|---------|-----------|-----------|-----------------|-----------------|----------------------|----------------------|
|          | F-RC    |           | MHz       | FCH+SCH         | FCH             | (RTAP)               | (RETAP)              |
| Cellular | 564     | 90S       | 820.1     | 13.37           | 13.39           | 13.40                | 13.41                |
| Cellular | 1013    | 22H       | 824.7     | 15.28           | 15.32           | 15.34                | 15.33                |
|          | 384     | 22H       | 836.52    | 15.25           | 15.27           | 15.29                | 15.30                |
|          | 777     | 22H       | 848.31    | 15.01           | 15.04           | 15.03                | 15.06                |
| PCS      | 25      | 24E       | 1851.25   | 13.16           | 13.15           | 13.16                | 13.19                |
|          | 600     | 24E       | 1880      | 12.93           | 12.94           | 12.95                | 12.93                |
|          | 1175    | 24E       | 1908.75   | 13.86           | 13.89           | 13.91                | 13.96                |

Note: For FCC Rule Part 90S, Per FCC KDB Publication 447498 D01v06 4.1.g), only one channel is required since the device operates within the transmission range of 817.90 – 823.10 MHz.



**Figure 8-1**  
**Power Measurement Setup**

|                                      |                                                                                                                                   |                              |                                                                                       |                                 |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT        |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                                                                | DUT Type:<br>Portable Tablet |                                                                                       | Page 21 of 100                  |

## 8.2 LTE Conducted Powers

### 8.2.1 LTE Band 12

**Table 8-3**  
**LTE Band 12 Maximum Conducted Powers - 10 MHz Bandwidth**

| LTE Band 12<br>10 MHz Bandwidth |         |           |                          |                              |          |
|---------------------------------|---------|-----------|--------------------------|------------------------------|----------|
| Modulation                      | RB Size | RB Offset | Mid Channel              | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                 |         |           | 23095<br>(707.5 MHz)     |                              |          |
|                                 |         |           | Conducted Power<br>[dBm] |                              |          |
| QPSK                            | 1       | 0         | 23.53                    | 0                            | 0        |
|                                 | 1       | 25        | 23.35                    |                              | 0        |
|                                 | 1       | 49        | 23.23                    |                              | 0        |
|                                 | 25      | 0         | 22.45                    | 0-1                          | 1        |
|                                 | 25      | 12        | 22.43                    |                              | 1        |
|                                 | 25      | 25        | 22.34                    |                              | 1        |
|                                 | 50      | 0         | 22.37                    |                              | 1        |
| 16QAM                           | 1       | 0         | 22.57                    | 0-1                          | 1        |
|                                 | 1       | 25        | 22.43                    |                              | 1        |
|                                 | 1       | 49        | 22.35                    |                              | 1        |
|                                 | 25      | 0         | 21.43                    | 0-2                          | 2        |
|                                 | 25      | 12        | 21.40                    |                              | 2        |
|                                 | 25      | 25        | 21.29                    |                              | 2        |
|                                 | 50      | 0         | 21.40                    |                              | 2        |
| 64QAM                           | 1       | 0         | 21.57                    | 0-2                          | 2        |
|                                 | 1       | 25        | 21.49                    |                              | 2        |
|                                 | 1       | 49        | 21.37                    |                              | 2        |
|                                 | 25      | 0         | 20.48                    | 0-3                          | 3        |
|                                 | 25      | 12        | 20.46                    |                              | 3        |
|                                 | 25      | 25        | 20.39                    |                              | 3        |
|                                 | 50      | 0         | 20.44                    |                              | 3        |

Note: LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

**Table 8-4**  
**LTE Band 12 Maximum Conducted Powers - 5 MHz Bandwidth**

| LTE Band 12<br>5 MHz Bandwidth |         |           |                       |                      |                      |                              |          |
|--------------------------------|---------|-----------|-----------------------|----------------------|----------------------|------------------------------|----------|
| Modulation                     | RB Size | RB Offset | Low Channel           | Mid Channel          | High Channel         | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                |         |           | 23035<br>(701.5 MHz)  | 23095<br>(707.5 MHz) | 23155<br>(713.5 MHz) |                              |          |
|                                |         |           | Conducted Power [dBm] |                      |                      |                              |          |
| QPSK                           | 1       | 0         | 23.48                 | 23.49                | 23.50                | 0                            | 0        |
|                                | 1       | 12        | 23.40                 | 23.40                | 23.42                |                              | 0        |
|                                | 1       | 24        | 23.37                 | 23.39                | 23.41                |                              | 0        |
|                                | 12      | 0         | 22.50                 | 22.50                | 22.54                | 0-1                          | 1        |
|                                | 12      | 6         | 22.50                 | 22.53                | 22.56                |                              | 1        |
|                                | 12      | 13        | 22.43                 | 22.47                | 22.48                |                              | 1        |
|                                | 25      | 0         | 22.40                 | 22.45                | 22.51                |                              | 1        |
| 16QAM                          | 1       | 0         | 22.67                 | 22.79                | 22.72                | 0-1                          | 1        |
|                                | 1       | 12        | 22.60                 | 22.69                | 22.69                |                              | 1        |
|                                | 1       | 24        | 22.61                 | 22.60                | 22.62                |                              | 1        |
|                                | 12      | 0         | 21.49                 | 21.48                | 21.59                | 0-2                          | 2        |
|                                | 12      | 6         | 21.48                 | 21.53                | 21.57                |                              | 2        |
|                                | 12      | 13        | 21.46                 | 21.48                | 21.51                |                              | 2        |
|                                | 25      | 0         | 21.45                 | 21.43                | 21.52                |                              | 2        |
| 64QAM                          | 1       | 0         | 21.65                 | 21.63                | 21.72                | 0-2                          | 2        |
|                                | 1       | 12        | 21.60                 | 21.60                | 21.62                |                              | 2        |
|                                | 1       | 24        | 21.55                 | 21.55                | 21.56                |                              | 2        |
|                                | 12      | 0         | 20.54                 | 20.47                | 20.54                | 0-3                          | 3        |
|                                | 12      | 6         | 20.49                 | 20.55                | 20.57                |                              | 3        |
|                                | 12      | 13        | 20.45                 | 20.48                | 20.51                |                              | 3        |
|                                | 25      | 0         | 20.45                 | 20.48                | 20.51                |                              | 3        |

|                                      |                                                                                                                                                                                                        |                              |                                 |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  <b>SAR EVALUATION REPORT</b>  |                              | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                                                                                                                                     | DUT Type:<br>Portable Tablet | Page 22 of 100                  |

**Table 8-5**  
**LTE Band 12 Maximum Conducted Powers - 3 MHz Bandwidth**

| LTE Band 12<br>3 MHz Bandwidth |         |           |                       |                      |                      |                              |          |
|--------------------------------|---------|-----------|-----------------------|----------------------|----------------------|------------------------------|----------|
| Modulation                     | RB Size | RB Offset | Low Channel           | Mid Channel          | High Channel         | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                |         |           | 23025<br>(700.5 MHz)  | 23095<br>(707.5 MHz) | 23165<br>(714.5 MHz) |                              |          |
|                                |         |           | Conducted Power [dBm] |                      |                      |                              |          |
| QPSK                           | 1       | 0         | 23.32                 | 23.43                | 23.44                | 0                            | 0        |
|                                | 1       | 7         | 23.43                 | 23.47                | 23.50                |                              | 0        |
|                                | 1       | 14        | 23.29                 | 23.35                | 23.38                |                              | 0        |
|                                | 8       | 0         | 22.33                 | 22.49                | 22.50                | 0-1                          | 1        |
|                                | 8       | 4         | 22.34                 | 22.45                | 22.50                |                              | 1        |
|                                | 8       | 7         | 22.31                 | 22.44                | 22.45                |                              | 1        |
|                                | 15      | 0         | 22.35                 | 22.44                | 22.47                |                              | 1        |
| 16QAM                          | 1       | 0         | 22.58                 | 22.67                | 22.62                | 0-1                          | 1        |
|                                | 1       | 7         | 22.63                 | 22.76                | 22.74                |                              | 1        |
|                                | 1       | 14        | 22.50                 | 22.63                | 22.61                |                              | 1        |
|                                | 8       | 0         | 21.40                 | 21.54                | 21.55                | 0-2                          | 2        |
|                                | 8       | 4         | 21.44                 | 21.50                | 21.54                |                              | 2        |
|                                | 8       | 7         | 21.36                 | 21.48                | 21.52                |                              | 2        |
|                                | 15      | 0         | 21.33                 | 21.42                | 21.44                |                              | 2        |
| 64QAM                          | 1       | 0         | 21.52                 | 21.59                | 21.64                | 0-2                          | 2        |
|                                | 1       | 7         | 21.55                 | 21.75                | 21.70                |                              | 2        |
|                                | 1       | 14        | 21.43                 | 21.59                | 21.54                |                              | 2        |
|                                | 8       | 0         | 20.38                 | 20.49                | 20.52                | 0-3                          | 3        |
|                                | 8       | 4         | 20.37                 | 20.51                | 20.52                |                              | 3        |
|                                | 8       | 7         | 20.35                 | 20.47                | 20.51                |                              | 3        |
|                                | 15      | 0         | 20.36                 | 20.44                | 20.47                |                              | 3        |

**Table 8-6**  
**LTE Band 12 Maximum Conducted Powers -1.4 MHz Bandwidth**

| LTE Band 12<br>1.4 MHz Bandwidth |         |           |                       |                      |                      |                              |          |
|----------------------------------|---------|-----------|-----------------------|----------------------|----------------------|------------------------------|----------|
| Modulation                       | RB Size | RB Offset | Low Channel           | Mid Channel          | High Channel         | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                  |         |           | 23017<br>(699.7 MHz)  | 23095<br>(707.5 MHz) | 23173<br>(715.3 MHz) |                              |          |
|                                  |         |           | Conducted Power [dBm] |                      |                      |                              |          |
| QPSK                             | 1       | 0         | 23.27                 | 23.34                | 23.33                | 0                            | 0        |
|                                  | 1       | 2         | 23.28                 | 23.38                | 23.40                |                              | 0        |
|                                  | 1       | 5         | 23.22                 | 23.32                | 23.32                |                              | 0        |
|                                  | 3       | 0         | 23.27                 | 23.38                | 23.35                |                              | 0        |
|                                  | 3       | 2         | 23.32                 | 23.40                | 23.41                |                              | 0        |
|                                  | 3       | 3         | 23.26                 | 23.34                | 23.37                |                              | 0        |
|                                  | 6       | 0         | 22.26                 | 22.39                | 22.38                | 0-1                          | 1        |
| 16QAM                            | 1       | 0         | 22.48                 | 22.59                | 22.60                | 0-1                          | 1        |
|                                  | 1       | 2         | 22.51                 | 22.67                | 22.68                |                              | 1        |
|                                  | 1       | 5         | 22.47                 | 22.56                | 22.56                |                              | 1        |
|                                  | 3       | 0         | 22.35                 | 22.46                | 22.49                |                              | 1        |
|                                  | 3       | 2         | 22.43                 | 22.49                | 22.56                |                              | 1        |
|                                  | 3       | 3         | 22.40                 | 22.44                | 22.49                |                              | 1        |
|                                  | 6       | 0         | 21.36                 | 21.45                | 21.47                | 0-2                          | 2        |
| 64QAM                            | 1       | 0         | 21.40                 | 21.51                | 21.50                | 0-2                          | 2        |
|                                  | 1       | 2         | 21.50                 | 21.59                | 21.54                |                              | 2        |
|                                  | 1       | 5         | 21.41                 | 21.48                | 21.51                |                              | 2        |
|                                  | 3       | 0         | 21.37                 | 21.43                | 21.45                |                              | 2        |
|                                  | 3       | 2         | 21.39                 | 21.48                | 21.50                |                              | 2        |
|                                  | 3       | 3         | 21.34                 | 21.44                | 21.41                |                              | 2        |
|                                  | 6       | 0         | 20.28                 | 20.42                | 20.43                | 0-3                          | 3        |

FCC ID: A3LSMT837P



**SAR EVALUATION REPORT**



**Approved by:**  
Quality Manager

**Document S/N:**  
1M1806060119-01.A3L

**Test Dates:**  
06/11/18 - 06/26/18

**DUT Type:**  
Portable Tablet

Page 23 of 100



**Table 8-7**  
**LTE Band 12 Reduced Conducted Powers - 10 MHz Bandwidth**

| LTE Band 12<br>10 MHz Bandwidth |         |           |                          |                              |          |
|---------------------------------|---------|-----------|--------------------------|------------------------------|----------|
| Modulation                      | RB Size | RB Offset | Mid Channel              | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                 |         |           | 23095<br>(707.5 MHz)     |                              |          |
|                                 |         |           | Conducted Power<br>[dBm] |                              |          |
| QPSK                            | 1       | 0         | 12.89                    | 0                            | 0        |
|                                 | 1       | 25        | 12.83                    |                              | 0        |
|                                 | 1       | 49        | 12.78                    |                              | 0        |
|                                 | 25      | 0         | 12.96                    | 0-1                          | 0        |
|                                 | 25      | 12        | 12.95                    |                              | 0        |
|                                 | 25      | 25        | 12.92                    |                              | 0        |
|                                 | 50      | 0         | 12.85                    |                              | 0        |
| 16QAM                           | 1       | 0         | 13.27                    | 0-1                          | 0        |
|                                 | 1       | 25        | 13.24                    |                              | 0        |
|                                 | 1       | 49        | 13.18                    |                              | 0        |
|                                 | 25      | 0         | 13.01                    | 0-2                          | 0        |
|                                 | 25      | 12        | 13.00                    |                              | 0        |
|                                 | 25      | 25        | 12.99                    |                              | 0        |
|                                 | 50      | 0         | 13.00                    |                              | 0        |
| 64QAM                           | 1       | 0         | 13.24                    | 0-2                          | 0        |
|                                 | 1       | 25        | 13.15                    |                              | 0        |
|                                 | 1       | 49        | 13.05                    |                              | 0        |
|                                 | 25      | 0         | 13.10                    | 0-3                          | 0        |
|                                 | 25      | 12        | 13.16                    |                              | 0        |
|                                 | 25      | 25        | 13.02                    |                              | 0        |
|                                 | 50      | 0         | 13.09                    |                              | 0        |

Note: LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

**Table 8-8**  
**LTE Band 12 Reduced Conducted Powers - 5 MHz Bandwidth**

| LTE Band 12     |         |           |                       |                      |                      |                              |          |
|-----------------|---------|-----------|-----------------------|----------------------|----------------------|------------------------------|----------|
| 5 MHz Bandwidth |         |           |                       |                      |                      |                              |          |
| Modulation      | RB Size | RB Offset | Low Channel           | Mid Channel          | High Channel         | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                 |         |           | 23035<br>(701.5 MHz)  | 23095<br>(707.5 MHz) | 23155<br>(713.5 MHz) |                              |          |
|                 |         |           | Conducted Power [dBm] |                      |                      |                              |          |
| QPSK            | 1       | 0         | 12.81                 | 12.84                | 12.88                | 0                            | 0        |
|                 | 1       | 12        | 12.77                 | 12.75                | 12.79                |                              | 0        |
|                 | 1       | 24        | 12.72                 | 12.74                | 12.73                |                              | 0        |
|                 | 12      | 0         | 12.83                 | 12.87                | 12.86                | 0-1                          | 0        |
|                 | 12      | 6         | 12.84                 | 12.86                | 12.86                |                              | 0        |
|                 | 12      | 13        | 12.79                 | 12.79                | 12.83                |                              | 0        |
|                 | 25      | 0         | 12.83                 | 12.81                | 12.85                |                              | 0        |
| 16QAM           | 1       | 0         | 13.07                 | 13.08                | 13.15                | 0-1                          | 0        |
|                 | 1       | 12        | 12.98                 | 12.97                | 13.06                |                              | 0        |
|                 | 1       | 24        | 12.96                 | 12.96                | 12.97                |                              | 0        |
|                 | 12      | 0         | 12.82                 | 12.82                | 12.87                | 0-2                          | 0        |
|                 | 12      | 6         | 12.83                 | 12.83                | 12.88                |                              | 0        |
|                 | 12      | 13        | 12.77                 | 12.81                | 12.84                |                              | 0        |
|                 | 25      | 0         | 12.80                 | 12.77                | 12.81                |                              | 0        |
| 64QAM           | 1       | 0         | 13.02                 | 13.03                | 13.07                | 0-2                          | 0        |
|                 | 1       | 12        | 12.96                 | 12.98                | 12.98                |                              | 0        |
|                 | 1       | 24        | 12.88                 | 12.89                | 13.00                |                              | 0        |
|                 | 12      | 0         | 12.81                 | 12.79                | 12.90                | 0-3                          | 0        |
|                 | 12      | 6         | 12.82                 | 12.85                | 12.91                |                              | 0        |
|                 | 12      | 13        | 12.76                 | 12.80                | 12.87                |                              | 0        |
|                 | 25      | 0         | 12.80                 | 12.86                | 12.86                |                              | 0        |

FCC ID: A3LSMT837P



**SAR EVALUATION REPORT**



**Approved by:**  
Quality Manager

Document S/N:

Test Dates:

DUT Type:

1M1806060119-01.A3L

06/11/18 - 06/26/18

Portable Tablet

Page 24 of 100



**Table 8-9**  
**LTE Band 12 Reduced Conducted Powers - 3 MHz Bandwidth**

| LTE Band 12<br>3 MHz Bandwidth |         |           |                       |                      |                      |                              |          |
|--------------------------------|---------|-----------|-----------------------|----------------------|----------------------|------------------------------|----------|
| Modulation                     | RB Size | RB Offset | Low Channel           | Mid Channel          | High Channel         | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                |         |           | 23025<br>(700.5 MHz)  | 23095<br>(707.5 MHz) | 23165<br>(714.5 MHz) |                              |          |
|                                |         |           | Conducted Power [dBm] |                      |                      |                              |          |
| QPSK                           | 1       | 0         | 12.73                 | 12.81                | 12.83                | 0                            | 0        |
|                                | 1       | 7         | 12.79                 | 12.88                | 12.89                |                              | 0        |
|                                | 1       | 14        | 12.66                 | 12.74                | 12.75                |                              | 0        |
|                                | 8       | 0         | 12.71                 | 12.81                | 12.82                | 0-1                          | 0        |
|                                | 8       | 4         | 12.74                 | 12.85                | 12.84                |                              | 0        |
|                                | 8       | 7         | 12.69                 | 12.83                | 12.80                |                              | 0        |
|                                | 15      | 0         | 12.73                 | 12.77                | 12.83                |                              | 0        |
| 16QAM                          | 1       | 0         | 12.91                 | 12.99                | 13.06                | 0-1                          | 0        |
|                                | 1       | 7         | 13.04                 | 13.14                | 13.15                |                              | 0        |
|                                | 1       | 14        | 12.90                 | 13.00                | 12.96                |                              | 0        |
|                                | 8       | 0         | 12.73                 | 12.85                | 12.83                | 0-2                          | 0        |
|                                | 8       | 4         | 12.75                 | 12.85                | 12.87                |                              | 0        |
|                                | 8       | 7         | 12.70                 | 12.81                | 12.81                |                              | 0        |
|                                | 15      | 0         | 12.69                 | 12.76                | 12.78                |                              | 0        |
| 64QAM                          | 1       | 0         | 12.88                 | 12.96                | 13.00                | 0-2                          | 0        |
|                                | 1       | 7         | 12.96                 | 13.08                | 13.06                |                              | 0        |
|                                | 1       | 14        | 12.85                 | 12.91                | 12.95                |                              | 0        |
|                                | 8       | 0         | 12.76                 | 12.82                | 12.87                | 0-3                          | 0        |
|                                | 8       | 4         | 12.73                 | 12.83                | 12.88                |                              | 0        |
|                                | 8       | 7         | 12.73                 | 12.83                | 12.83                |                              | 0        |
|                                | 15      | 0         | 12.71                 | 12.81                | 12.81                |                              | 0        |

**Table 8-10**  
**LTE Band 12 Reduced Conducted Powers -1.4 MHz Bandwidth**

| LTE Band 12<br>1.4 MHz Bandwidth |         |           |                       |                      |                      |                              |          |
|----------------------------------|---------|-----------|-----------------------|----------------------|----------------------|------------------------------|----------|
| Modulation                       | RB Size | RB Offset | Low Channel           | Mid Channel          | High Channel         | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                  |         |           | 23017<br>(699.7 MHz)  | 23095<br>(707.5 MHz) | 23173<br>(715.3 MHz) |                              |          |
|                                  |         |           | Conducted Power [dBm] |                      |                      |                              |          |
| QPSK                             | 1       | 0         | 12.60                 | 12.70                | 12.71                | 0                            | 0        |
|                                  | 1       | 2         | 12.67                 | 12.73                | 12.80                |                              | 0        |
|                                  | 1       | 5         | 12.59                 | 12.70                | 12.66                |                              | 0        |
|                                  | 3       | 0         | 12.62                 | 12.73                | 12.73                |                              | 0        |
|                                  | 3       | 2         | 12.69                 | 12.79                | 12.74                |                              | 0        |
|                                  | 3       | 3         | 12.62                 | 12.71                | 12.71                |                              | 0        |
|                                  | 6       | 0         | 12.67                 | 12.72                | 12.74                | 0-1                          | 0        |
| 16QAM                            | 1       | 0         | 12.89                 | 12.91                | 12.94                | 0-1                          | 0        |
|                                  | 1       | 2         | 12.88                 | 13.03                | 13.02                |                              | 0        |
|                                  | 1       | 5         | 12.80                 | 12.98                | 12.95                |                              | 0        |
|                                  | 3       | 0         | 12.73                 | 12.82                | 12.81                |                              | 0        |
|                                  | 3       | 2         | 12.75                 | 12.88                | 12.84                |                              | 0        |
|                                  | 3       | 3         | 12.70                 | 12.80                | 12.81                |                              | 0        |
|                                  | 6       | 0         | 12.71                 | 12.77                | 12.79                | 0-2                          | 0        |
| 64QAM                            | 1       | 0         | 12.79                 | 12.88                | 12.90                | 0-2                          | 0        |
|                                  | 1       | 2         | 12.88                 | 12.95                | 12.95                |                              | 0        |
|                                  | 1       | 5         | 12.75                 | 12.87                | 12.83                |                              | 0        |
|                                  | 3       | 0         | 12.70                 | 12.77                | 12.84                |                              | 0        |
|                                  | 3       | 2         | 12.80                 | 12.84                | 12.88                |                              | 0        |
|                                  | 3       | 3         | 12.69                 | 12.79                | 12.82                |                              | 0        |
|                                  | 6       | 0         | 12.67                 | 12.77                | 12.77                | 0-3                          | 0        |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | <b>SAR EVALUATION REPORT</b> |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 25 of 100                  |

## 8.2.2

## LTE Band 13

**Table 8-11**  
**LTE Band 13 Maximum Conducted Powers - 10 MHz Bandwidth**

| LTE Band 13<br>10 MHz Bandwidth |         |           |                          |                              |          |
|---------------------------------|---------|-----------|--------------------------|------------------------------|----------|
| Modulation                      | RB Size | RB Offset | Mid Channel              | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                 |         |           | 23230<br>(782.0 MHz)     |                              |          |
|                                 |         |           | Conducted Power<br>[dBm] |                              |          |
| QPSK                            | 1       | 0         | 23.78                    | 0                            | 0        |
|                                 | 1       | 25        | 23.67                    |                              | 0        |
|                                 | 1       | 49        | 23.58                    |                              | 0        |
|                                 | 25      | 0         | 22.77                    | 0-1                          | 1        |
|                                 | 25      | 12        | 22.72                    |                              | 1        |
|                                 | 25      | 25        | 22.67                    |                              | 1        |
|                                 | 50      | 0         | 22.72                    |                              | 1        |
| 16QAM                           | 1       | 0         | 23.06                    | 0-1                          | 1        |
|                                 | 1       | 25        | 22.88                    |                              | 1        |
|                                 | 1       | 49        | 22.82                    |                              | 1        |
|                                 | 25      | 0         | 21.79                    | 0-2                          | 2        |
|                                 | 25      | 12        | 21.73                    |                              | 2        |
|                                 | 25      | 25        | 21.62                    |                              | 2        |
|                                 | 50      | 0         | 21.71                    |                              | 2        |
| 64QAM                           | 1       | 0         | 21.85                    | 0-2                          | 2        |
|                                 | 1       | 25        | 21.68                    |                              | 2        |
|                                 | 1       | 49        | 21.59                    |                              | 2        |
|                                 | 25      | 0         | 20.68                    | 0-3                          | 3        |
|                                 | 25      | 12        | 20.67                    |                              | 3        |
|                                 | 25      | 25        | 20.57                    |                              | 3        |
|                                 | 50      | 0         | 20.66                    |                              | 3        |

**Table 8-12**  
**LTE Band 13 Maximum Conducted Powers - 5 MHz Bandwidth**

| LTE Band 13<br>5 MHz Bandwidth |         |           |                          |                              |          |
|--------------------------------|---------|-----------|--------------------------|------------------------------|----------|
| Modulation                     | RB Size | RB Offset | Mid Channel              | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                |         |           | 23230<br>(782.0 MHz)     |                              |          |
|                                |         |           | Conducted Power<br>[dBm] |                              |          |
| QPSK                           | 1       | 0         | 23.57                    | 0                            | 0        |
|                                | 1       | 12        | 23.49                    |                              | 0        |
|                                | 1       | 24        | 23.44                    |                              | 0        |
|                                | 12      | 0         | 22.52                    | 0-1                          | 1        |
|                                | 12      | 6         | 22.53                    |                              | 1        |
|                                | 12      | 13        | 22.49                    |                              | 1        |
|                                | 25      | 0         | 22.53                    |                              | 1        |
| 16QAM                          | 1       | 0         | 22.82                    | 0-1                          | 1        |
|                                | 1       | 12        | 22.71                    |                              | 1        |
|                                | 1       | 24        | 22.69                    |                              | 1        |
|                                | 12      | 0         | 21.56                    | 0-2                          | 2        |
|                                | 12      | 6         | 21.60                    |                              | 2        |
|                                | 12      | 13        | 21.52                    |                              | 2        |
|                                | 25      | 0         | 21.51                    |                              | 2        |
| 64QAM                          | 1       | 0         | 21.82                    | 0-2                          | 2        |
|                                | 1       | 12        | 21.62                    |                              | 2        |
|                                | 1       | 24        | 21.67                    |                              | 2        |
|                                | 12      | 0         | 20.59                    | 0-3                          | 3        |
|                                | 12      | 6         | 20.57                    |                              | 3        |
|                                | 12      | 13        | 20.51                    |                              | 3        |
|                                | 25      | 0         | 20.55                    |                              | 3        |

Note: LTE Band 13 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | <b>SAR EVALUATION REPORT</b> |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet | Page 26 of 100                                                                        |                                 |

**Table 8-13**  
**LTE Band 13 Reduced Conducted Powers - 10 MHz Bandwidth**

| LTE Band 13<br>10 MHz Bandwidth |         |           |                          |                              |          |
|---------------------------------|---------|-----------|--------------------------|------------------------------|----------|
| Modulation                      | RB Size | RB Offset | Mid Channel              | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                 |         |           | 23230<br>(782.0 MHz)     |                              |          |
|                                 |         |           | Conducted Power<br>[dBm] |                              |          |
| QPSK                            | 1       | 0         | 13.12                    | 0                            | 0        |
|                                 | 1       | 25        | 12.96                    |                              | 0        |
|                                 | 1       | 49        | 12.93                    |                              | 0        |
|                                 | 25      | 0         | 13.07                    | 0-1                          | 0        |
|                                 | 25      | 12        | 13.11                    |                              | 0        |
|                                 | 25      | 25        | 13.07                    |                              | 0        |
|                                 | 50      | 0         | 13.10                    |                              | 0        |
| 16QAM                           | 1       | 0         | 13.28                    | 0-1                          | 0        |
|                                 | 1       | 25        | 13.20                    |                              | 0        |
|                                 | 1       | 49        | 13.10                    |                              | 0        |
|                                 | 25      | 0         | 13.12                    | 0-2                          | 0        |
|                                 | 25      | 12        | 13.14                    |                              | 0        |
|                                 | 25      | 25        | 13.11                    |                              | 0        |
|                                 | 50      | 0         | 13.15                    |                              | 0        |
| 64QAM                           | 1       | 0         | 13.37                    | 0-2                          | 0        |
|                                 | 1       | 25        | 13.25                    |                              | 0        |
|                                 | 1       | 49        | 13.12                    |                              | 0        |
|                                 | 25      | 0         | 13.20                    | 0-3                          | 0        |
|                                 | 25      | 12        | 13.21                    |                              | 0        |
|                                 | 25      | 25        | 13.15                    |                              | 0        |
|                                 | 50      | 0         | 13.17                    |                              | 0        |

**Table 8-14**  
**LTE Band 13 Reduced Conducted Powers - 5 MHz Bandwidth**

| LTE Band 13<br>5 MHz Bandwidth |         |           |                          |                              |          |
|--------------------------------|---------|-----------|--------------------------|------------------------------|----------|
| Modulation                     | RB Size | RB Offset | Mid Channel              | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                |         |           | 23230<br>(782.0 MHz)     |                              |          |
|                                |         |           | Conducted Power<br>[dBm] |                              |          |
| QPSK                           | 1       | 0         | 13.02                    | 0                            | 0        |
|                                | 1       | 12        | 12.97                    |                              | 0        |
|                                | 1       | 24        | 12.91                    |                              | 0        |
|                                | 12      | 0         | 12.97                    | 0-1                          | 0        |
|                                | 12      | 6         | 13.01                    |                              | 0        |
|                                | 12      | 13        | 12.93                    |                              | 0        |
|                                | 25      | 0         | 13.00                    |                              | 0        |
| 16QAM                          | 1       | 0         | 13.21                    | 0-1                          | 0        |
|                                | 1       | 12        | 13.17                    |                              | 0        |
|                                | 1       | 24        | 13.09                    |                              | 0        |
|                                | 12      | 0         | 13.10                    | 0-2                          | 0        |
|                                | 12      | 6         | 13.03                    |                              | 0        |
|                                | 12      | 13        | 12.98                    |                              | 0        |
|                                | 25      | 0         | 12.98                    |                              | 0        |
| 64QAM                          | 1       | 0         | 13.18                    | 0-2                          | 0        |
|                                | 1       | 12        | 13.09                    |                              | 0        |
|                                | 1       | 24        | 13.08                    |                              | 0        |
|                                | 12      | 0         | 13.01                    | 0-3                          | 0        |
|                                | 12      | 6         | 13.05                    |                              | 0        |
|                                | 12      | 13        | 12.98                    |                              | 0        |
|                                | 25      | 0         | 12.99                    |                              | 0        |

Note: LTE Band 13 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | <b>SAR EVALUATION REPORT</b> |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet | Page 27 of 100                                                                        |                                 |

## 8.2.3

## LTE Band 26 (Cell)

**Table 8-15**  
**LTE Band 26 (Cell) Maximum Conducted Powers - 15 MHz Bandwidth**

| LTE Band 26 (Cell)<br>15 MHz Bandwidth |         |           |                          |                              |          |
|----------------------------------------|---------|-----------|--------------------------|------------------------------|----------|
| Modulation                             | RB Size | RB Offset | Mid Channel              | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                        |         |           | 26865<br>(831.5 MHz)     |                              |          |
|                                        |         |           | Conducted Power<br>[dBm] |                              |          |
| QPSK                                   | 1       | 0         | 23.76                    | 0                            | 0        |
|                                        | 1       | 36        | 23.73                    |                              | 0        |
|                                        | 1       | 74        | 23.57                    |                              | 0        |
|                                        | 36      | 0         | 22.78                    | 0-1                          | 1        |
|                                        | 36      | 18        | 22.79                    |                              | 1        |
|                                        | 36      | 37        | 22.70                    |                              | 1        |
|                                        | 75      | 0         | 22.71                    |                              | 1        |
| 16QAM                                  | 1       | 0         | 23.01                    | 0-1                          | 1        |
|                                        | 1       | 36        | 22.88                    |                              | 1        |
|                                        | 1       | 74        | 22.89                    |                              | 1        |
|                                        | 36      | 0         | 21.77                    | 0-2                          | 2        |
|                                        | 36      | 18        | 21.75                    |                              | 2        |
|                                        | 36      | 37        | 21.66                    |                              | 2        |
|                                        | 75      | 0         | 21.71                    |                              | 2        |
| 64QAM                                  | 1       | 0         | 21.92                    | 0-2                          | 2        |
|                                        | 1       | 36        | 21.78                    |                              | 2        |
|                                        | 1       | 74        | 21.64                    |                              | 2        |
|                                        | 36      | 0         | 20.82                    | 0-3                          | 3        |
|                                        | 36      | 18        | 20.77                    |                              | 3        |
|                                        | 36      | 37        | 20.66                    |                              | 3        |
|                                        | 75      | 0         | 20.75                    |                              | 3        |

Note: LTE Band 26 (Cell) at 15 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

**Table 8-16**  
**LTE Band 26 (Cell) Maximum Conducted Powers - 10 MHz Bandwidth**

| LTE Band 26 (Cell)<br>10 MHz Bandwidth |         |           |                       |                      |                      |                              |          |   |
|----------------------------------------|---------|-----------|-----------------------|----------------------|----------------------|------------------------------|----------|---|
| Modulation                             | RB Size | RB Offset | Low Channel           | Mid Channel          | High Channel         | MPR Allowed per<br>3GPP [dB] | MPR [dB] |   |
|                                        |         |           | 26740<br>(819.0 MHz)  | 26865<br>(831.5 MHz) | 26990<br>(844.0 MHz) |                              |          |   |
|                                        |         |           | Conducted Power [dBm] |                      |                      |                              |          |   |
| QPSK                                   | 1       | 0         | 23.85                 | 23.69                | 23.55                | 0                            | 0        |   |
|                                        | 1       | 25        | 23.80                 | 23.62                | 23.45                |                              | 0        |   |
|                                        | 1       | 49        | 23.78                 | 23.58                | 23.39                |                              | 0        |   |
|                                        | 25      | 0         | 22.85                 | 22.72                | 22.57                | 0-1                          | 1        |   |
|                                        | 25      | 12        | 22.87                 | 22.68                | 22.54                |                              | 1        |   |
|                                        | 25      | 25        | 22.84                 | 22.66                | 22.49                |                              | 1        |   |
| 16QAM                                  | 50      | 0         | 22.82                 | 22.72                | 22.55                | 0-1                          | 1        |   |
|                                        | 1       | 0         | 23.09                 | 23.07                | 22.94                |                              | 0-1      | 1 |
|                                        | 1       | 25        | 23.00                 | 23.03                | 22.90                |                              |          | 1 |
|                                        | 1       | 49        | 22.99                 | 23.00                | 22.83                | 0-2                          |          | 1 |
|                                        | 25      | 0         | 21.86                 | 21.71                | 21.60                |                              | 2        |   |
|                                        | 25      | 12        | 21.89                 | 21.69                | 21.57                |                              | 2        |   |
| 64QAM                                  | 25      | 25        | 21.86                 | 21.68                | 21.52                | 0-2                          | 2        |   |
|                                        | 50      | 0         | 21.89                 | 21.63                | 21.52                |                              | 0-3      | 3 |
|                                        | 1       | 0         | 22.11                 | 22.21                | 22.05                |                              |          | 3 |
|                                        | 1       | 25        | 22.03                 | 22.15                | 22.01                | 0-3                          |          | 3 |
|                                        | 1       | 49        | 22.00                 | 22.11                | 21.95                |                              | 3        |   |
|                                        | 25      | 0         | 20.82                 | 20.70                | 20.55                |                              | 3        |   |
| 64QAM                                  | 25      | 12        | 20.79                 | 20.73                | 20.56                | 0-3                          | 3        |   |
|                                        | 25      | 25        | 20.77                 | 20.69                | 20.53                |                              | 3        |   |
|                                        | 50      | 0         | 20.87                 | 20.74                | 20.56                |                              | 3        |   |

|                                      |                                                                                     |                              |                       |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|-----------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  |                              | SAR EVALUATION REPORT |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                       |                                                                                       | Page 28 of 100                  |

**Table 8-17**  
**LTE Band 26 (Cell) Maximum Conducted Powers - 5 MHz Bandwidth**

| LTE Band 26 (Cell)<br>5 MHz Bandwidth |         |           |                       |                      |                      |                              |          |
|---------------------------------------|---------|-----------|-----------------------|----------------------|----------------------|------------------------------|----------|
| Modulation                            | RB Size | RB Offset | Low Channel           | Mid Channel          | High Channel         | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                       |         |           | 26715<br>(816.5 MHz)  | 26865<br>(831.5 MHz) | 27015<br>(846.5 MHz) |                              |          |
|                                       |         |           | Conducted Power [dBm] |                      |                      |                              |          |
| QPSK                                  | 1       | 0         | 23.84                 | 23.71                | 23.50                | 0                            | 0        |
|                                       | 1       | 12        | 23.83                 | 23.66                | 23.47                |                              | 0        |
|                                       | 1       | 24        | 23.82                 | 23.67                | 23.44                |                              | 0        |
|                                       | 12      | 0         | 22.86                 | 22.71                | 22.55                | 0-1                          | 1        |
|                                       | 12      | 6         | 22.91                 | 22.74                | 22.55                |                              | 1        |
|                                       | 12      | 13        | 22.84                 | 22.67                | 22.47                |                              | 1        |
|                                       | 25      | 0         | 22.87                 | 22.69                | 22.51                |                              | 1        |
| 16QAM                                 | 1       | 0         | 22.94                 | 22.77                | 22.58                | 0-1                          | 1        |
|                                       | 1       | 12        | 22.84                 | 22.68                | 22.49                |                              | 1        |
|                                       | 1       | 24        | 22.90                 | 22.70                | 22.52                |                              | 1        |
|                                       | 12      | 0         | 21.82                 | 21.65                | 21.47                | 0-2                          | 2        |
|                                       | 12      | 6         | 21.85                 | 21.65                | 21.48                |                              | 2        |
|                                       | 12      | 13        | 21.81                 | 21.64                | 21.44                |                              | 2        |
|                                       | 25      | 0         | 21.92                 | 21.77                | 21.57                |                              | 2        |
| 64QAM                                 | 1       | 0         | 22.35                 | 22.17                | 22.01                | 0-2                          | 2        |
|                                       | 1       | 12        | 22.34                 | 22.15                | 21.97                |                              | 2        |
|                                       | 1       | 24        | 22.35                 | 22.16                | 21.98                |                              | 2        |
|                                       | 12      | 0         | 20.97                 | 20.82                | 20.63                | 0-3                          | 3        |
|                                       | 12      | 6         | 20.98                 | 20.80                | 20.62                |                              | 3        |
|                                       | 12      | 13        | 20.96                 | 20.79                | 20.56                |                              | 3        |
|                                       | 25      | 0         | 20.90                 | 20.71                | 20.54                |                              | 3        |

**Table 8-18**  
**LTE Band 26 (Cell) Maximum Conducted Powers - 3 MHz Bandwidth**

| LTE Band 26 (Cell)<br>3 MHz Bandwidth |         |           |                       |                      |                      |                              |          |
|---------------------------------------|---------|-----------|-----------------------|----------------------|----------------------|------------------------------|----------|
| Modulation                            | RB Size | RB Offset | Low Channel           | Mid Channel          | High Channel         | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                       |         |           | 26705<br>(815.5 MHz)  | 26865<br>(831.5 MHz) | 27025<br>(847.5 MHz) |                              |          |
|                                       |         |           | Conducted Power [dBm] |                      |                      |                              |          |
| QPSK                                  | 1       | 0         | 23.78                 | 23.60                | 23.48                | 0                            | 0        |
|                                       | 1       | 7         | 23.88                 | 23.69                | 23.57                |                              | 0        |
|                                       | 1       | 14        | 23.79                 | 23.54                | 23.45                |                              | 0        |
|                                       | 8       | 0         | 22.80                 | 22.65                | 22.51                | 0-1                          | 1        |
|                                       | 8       | 4         | 22.84                 | 22.70                | 22.52                |                              | 1        |
|                                       | 8       | 7         | 22.79                 | 22.69                | 22.47                |                              | 1        |
|                                       | 15      | 0         | 22.82                 | 22.68                | 22.50                | 1                            |          |
| 16QAM                                 | 1       | 0         | 23.01                 | 23.09                | 22.69                | 0-1                          | 1        |
|                                       | 1       | 7         | 23.09                 | 23.10                | 22.76                |                              | 1        |
|                                       | 1       | 14        | 23.03                 | 23.05                | 22.66                |                              | 1        |
|                                       | 8       | 0         | 21.83                 | 21.61                | 21.46                | 0-2                          | 2        |
|                                       | 8       | 4         | 21.79                 | 21.63                | 21.48                |                              | 2        |
|                                       | 8       | 7         | 21.79                 | 21.61                | 21.47                |                              | 2        |
|                                       | 15      | 0         | 21.74                 | 21.65                | 21.41                | 2                            |          |
| 64QAM                                 | 1       | 0         | 22.00                 | 22.13                | 21.68                | 0-2                          | 2        |
|                                       | 1       | 7         | 22.13                 | 22.23                | 21.79                |                              | 2        |
|                                       | 1       | 14        | 22.04                 | 22.12                | 21.68                |                              | 2        |
|                                       | 8       | 0         | 20.73                 | 20.42                | 20.42                | 0-3                          | 3        |
|                                       | 8       | 4         | 20.75                 | 20.46                | 20.43                |                              | 3        |
|                                       | 8       | 7         | 20.73                 | 20.39                | 20.39                |                              | 3        |
|                                       | 15      | 0         | 20.74                 | 20.43                | 20.42                | 3                            |          |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | <b>SAR EVALUATION REPORT</b> |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 29 of 100                  |

**Table 8-19**  
**LTE Band 26 (Cell) Maximum Conducted Powers -1.4 MHz Bandwidth**

| LTE Band 26 (Cell)<br>1.4 MHz Bandwidth |         |           |                       |                      |                      |                              |          |
|-----------------------------------------|---------|-----------|-----------------------|----------------------|----------------------|------------------------------|----------|
| Modulation                              | RB Size | RB Offset | Low Channel           | Mid Channel          | High Channel         | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                         |         |           | 26697<br>(814.7 MHz)  | 26865<br>(831.5 MHz) | 27033<br>(848.3 MHz) |                              |          |
|                                         |         |           | Conducted Power [dBm] |                      |                      |                              |          |
| QPSK                                    | 1       | 0         | 23.84                 | 23.61                | 23.34                | 0                            | 0        |
|                                         | 1       | 2         | 23.77                 | 23.67                | 23.39                |                              | 0        |
|                                         | 1       | 5         | 23.81                 | 23.60                | 23.31                |                              | 0        |
|                                         | 3       | 0         | 23.79                 | 23.62                | 23.42                |                              | 0        |
|                                         | 3       | 2         | 23.83                 | 23.65                | 23.46                |                              | 0        |
|                                         | 3       | 3         | 23.78                 | 23.60                | 23.43                |                              | 0        |
|                                         | 6       | 0         | 22.81                 | 22.63                | 22.40                | 0-1                          | 1        |
| 16QAM                                   | 1       | 0         | 23.04                 | 22.85                | 22.77                | 0-1                          | 1        |
|                                         | 1       | 2         | 23.08                 | 22.91                | 22.83                |                              | 1        |
|                                         | 1       | 5         | 23.03                 | 22.85                | 22.73                |                              | 1        |
|                                         | 3       | 0         | 23.00                 | 22.83                | 22.60                |                              | 1        |
|                                         | 3       | 2         | 23.04                 | 22.86                | 22.63                |                              | 1        |
|                                         | 3       | 3         | 23.01                 | 22.82                | 22.59                |                              | 1        |
|                                         | 6       | 0         | 21.67                 | 21.50                | 21.35                | 0-2                          | 2        |
| 64QAM                                   | 1       | 0         | 22.03                 | 21.85                | 21.87                | 0-2                          | 2        |
|                                         | 1       | 2         | 22.09                 | 21.94                | 21.94                |                              | 2        |
|                                         | 1       | 5         | 22.03                 | 21.85                | 21.87                |                              | 2        |
|                                         | 3       | 0         | 21.75                 | 21.57                | 21.24                |                              | 2        |
|                                         | 3       | 2         | 21.79                 | 21.61                | 21.27                |                              | 2        |
|                                         | 3       | 3         | 21.73                 | 21.56                | 21.21                |                              | 2        |
|                                         | 6       | 0         | 20.81                 | 20.66                | 20.41                | 0-3                          | 3        |

**Table 8-20**  
**LTE Band 26 (Cell) Reduced Conducted Powers - 15 MHz Bandwidth**

| LTE Band 26 (Cell)<br>15 MHz Bandwidth |         |           |                          |                              |          |
|----------------------------------------|---------|-----------|--------------------------|------------------------------|----------|
| Modulation                             | RB Size | RB Offset | Mid Channel              | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                        |         |           | 26865<br>(831.5 MHz)     |                              |          |
|                                        |         |           | Conducted Power<br>[dBm] |                              |          |
| QPSK                                   | 1       | 0         | 13.12                    | 0                            | 0        |
|                                        | 1       | 36        | 13.03                    |                              | 0        |
|                                        | 1       | 74        | 12.92                    |                              | 0        |
|                                        | 36      | 0         | 13.16                    | 0-1                          | 0        |
|                                        | 36      | 18        | 13.17                    |                              | 0        |
|                                        | 36      | 37        | 13.06                    |                              | 0        |
|                                        | 75      | 0         | 13.10                    |                              | 0        |
| 16QAM                                  | 1       | 0         | 13.39                    | 0-1                          | 0        |
|                                        | 1       | 36        | 13.38                    |                              | 0        |
|                                        | 1       | 74        | 13.26                    |                              | 0        |
|                                        | 36      | 0         | 13.17                    | 0-2                          | 0        |
|                                        | 36      | 18        | 13.16                    |                              | 0        |
|                                        | 36      | 37        | 13.10                    |                              | 0        |
|                                        | 75      | 0         | 13.08                    |                              | 0        |
| 64QAM                                  | 1       | 0         | 13.31                    | 0-2                          | 0        |
|                                        | 1       | 36        | 13.26                    |                              | 0        |
|                                        | 1       | 74        | 13.07                    |                              | 0        |
|                                        | 36      | 0         | 13.20                    | 0-3                          | 0        |
|                                        | 36      | 18        | 13.24                    |                              | 0        |
|                                        | 36      | 37        | 13.09                    |                              | 0        |
|                                        | 75      | 0         | 13.14                    |                              | 0        |

Note: LTE Band 26 (Cell) at 15 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

|                                      |                                                                                                                                   |                              |                                                                                       |                                 |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>SAR EVALUATION REPORT</b> |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                                                                | DUT Type:<br>Portable Tablet |                                                                                       | Page 30 of 100                  |

**Table 8-21**  
**LTE Band 26 (Cell) Reduced Conducted Powers - 10 MHz Bandwidth**

| LTE Band 26 (Cell)<br>10 MHz Bandwidth |         |           |                       |                      |                      |                              |          |
|----------------------------------------|---------|-----------|-----------------------|----------------------|----------------------|------------------------------|----------|
| Modulation                             | RB Size | RB Offset | Low Channel           | Mid Channel          | High Channel         | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                        |         |           | 26740<br>(819.0 MHz)  | 26865<br>(831.5 MHz) | 26990<br>(844.0 MHz) |                              |          |
|                                        |         |           | Conducted Power [dBm] |                      |                      |                              |          |
| QPSK                                   | 1       | 0         | 13.14                 | 13.01                | 12.89                | 0                            | 0        |
|                                        | 1       | 25        | 13.04                 | 12.93                | 12.79                |                              | 0        |
|                                        | 1       | 49        | 12.96                 | 12.83                | 12.70                |                              | 0        |
|                                        | 25      | 0         | 13.12                 | 13.03                | 12.87                | 0-1                          | 0        |
|                                        | 25      | 12        | 13.11                 | 13.04                | 12.88                |                              | 0        |
|                                        | 25      | 25        | 13.07                 | 12.93                | 12.81                |                              | 0        |
|                                        | 50      | 0         | 13.09                 | 12.98                | 12.85                |                              | 0        |
| 16QAM                                  | 1       | 0         | 13.32                 | 13.26                | 13.06                | 0-1                          | 0        |
|                                        | 1       | 25        | 13.25                 | 13.11                | 12.97                |                              | 0        |
|                                        | 1       | 49        | 13.16                 | 13.09                | 12.87                |                              | 0        |
|                                        | 25      | 0         | 13.12                 | 12.98                | 12.85                | 0-2                          | 0        |
|                                        | 25      | 12        | 13.14                 | 12.97                | 12.84                |                              | 0        |
|                                        | 25      | 25        | 13.04                 | 12.89                | 12.71                |                              | 0        |
|                                        | 50      | 0         | 13.10                 | 12.97                | 12.84                |                              | 0        |
| 64QAM                                  | 1       | 0         | 13.29                 | 13.16                | 13.03                | 0-2                          | 0        |
|                                        | 1       | 25        | 13.22                 | 13.09                | 12.91                |                              | 0        |
|                                        | 1       | 49        | 13.15                 | 13.01                | 12.89                |                              | 0        |
|                                        | 25      | 0         | 13.11                 | 13.00                | 12.90                | 0-3                          | 0        |
|                                        | 25      | 12        | 13.13                 | 13.01                | 12.87                |                              | 0        |
|                                        | 25      | 25        | 13.05                 | 12.93                | 12.79                |                              | 0        |
|                                        | 50      | 0         | 13.10                 | 13.00                | 12.86                |                              | 0        |

**Table 8-22**  
**LTE Band 26 (Cell) Reduced Conducted Powers - 5 MHz Bandwidth**

| LTE Band 26 (Cell)<br>5 MHz Bandwidth |         |           |                       |                      |                      |                              |          |
|---------------------------------------|---------|-----------|-----------------------|----------------------|----------------------|------------------------------|----------|
| Modulation                            | RB Size | RB Offset | Low Channel           | Mid Channel          | High Channel         | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                       |         |           | 26715<br>(816.5 MHz)  | 26865<br>(831.5 MHz) | 27015<br>(846.5 MHz) |                              |          |
|                                       |         |           | Conducted Power [dBm] |                      |                      |                              |          |
| QPSK                                  | 1       | 0         | 13.13                 | 12.97                | 12.79                | 0                            | 0        |
|                                       | 1       | 12        | 13.08                 | 12.89                | 12.76                |                              | 0        |
|                                       | 1       | 24        | 13.05                 | 12.89                | 12.71                |                              | 0        |
|                                       | 12      | 0         | 13.15                 | 12.98                | 12.81                | 0-1                          | 0        |
|                                       | 12      | 6         | 13.14                 | 12.99                | 12.83                |                              | 0        |
|                                       | 12      | 13        | 13.08                 | 12.98                | 12.77                |                              | 0        |
|                                       | 25      | 0         | 13.12                 | 12.97                | 12.79                |                              | 0        |
| 16QAM                                 | 1       | 0         | 13.42                 | 13.21                | 13.05                | 0-1                          | 0        |
|                                       | 1       | 12        | 13.32                 | 13.09                | 12.91                |                              | 0        |
|                                       | 1       | 24        | 13.26                 | 13.10                | 12.95                |                              | 0        |
|                                       | 12      | 0         | 13.14                 | 13.00                | 12.82                | 0-2                          | 0        |
|                                       | 12      | 6         | 13.13                 | 13.01                | 12.83                |                              | 0        |
|                                       | 12      | 13        | 13.10                 | 12.91                | 12.79                |                              | 0        |
|                                       | 25      | 0         | 13.10                 | 12.97                | 12.75                |                              | 0        |
| 64QAM                                 | 1       | 0         | 13.31                 | 13.16                | 12.94                | 0-2                          | 0        |
|                                       | 1       | 12        | 13.28                 | 13.08                | 12.91                |                              | 0        |
|                                       | 1       | 24        | 13.27                 | 13.04                | 12.88                |                              | 0        |
|                                       | 12      | 0         | 13.14                 | 12.98                | 12.83                | 0-3                          | 0        |
|                                       | 12      | 6         | 13.12                 | 13.01                | 12.82                |                              | 0        |
|                                       | 12      | 13        | 13.09                 | 12.92                | 12.79                |                              | 0        |
|                                       | 25      | 0         | 13.08                 | 12.98                | 12.80                |                              | 0        |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | <b>SAR EVALUATION REPORT</b> |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 31 of 100                  |



**Table 8-23**  
**LTE Band 26 (Cell) Reduced Conducted Powers - 3 MHz Bandwidth**

| LTE Band 26 (Cell)<br>3 MHz Bandwidth |         |           |                       |                      |                      |                              |          |
|---------------------------------------|---------|-----------|-----------------------|----------------------|----------------------|------------------------------|----------|
| Modulation                            | RB Size | RB Offset | Low Channel           | Mid Channel          | High Channel         | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                       |         |           | 26705<br>(815.5 MHz)  | 26865<br>(831.5 MHz) | 27025<br>(847.5 MHz) |                              |          |
|                                       |         |           | Conducted Power [dBm] |                      |                      |                              |          |
| QPSK                                  | 1       | 0         | 13.09                 | 12.92                | 12.76                | 0                            | 0        |
|                                       | 1       | 7         | 13.19                 | 13.00                | 12.83                |                              | 0        |
|                                       | 1       | 14        | 13.07                 | 12.89                | 12.71                |                              | 0        |
|                                       | 8       | 0         | 13.11                 | 12.97                | 12.78                | 0-1                          | 0        |
|                                       | 8       | 4         | 13.14                 | 12.95                | 12.78                |                              | 0        |
|                                       | 8       | 7         | 13.08                 | 12.91                | 12.74                |                              | 0        |
|                                       | 15      | 0         | 13.10                 | 12.95                | 12.75                |                              | 0        |
| 16QAM                                 | 1       | 0         | 13.38                 | 13.06                | 12.99                | 0-1                          | 0        |
|                                       | 1       | 7         | 13.44                 | 13.22                | 13.07                |                              | 0        |
|                                       | 1       | 14        | 13.27                 | 13.11                | 12.98                |                              | 0        |
|                                       | 8       | 0         | 13.14                 | 12.96                | 12.78                | 0-2                          | 0        |
|                                       | 8       | 4         | 13.18                 | 12.97                | 12.82                |                              | 0        |
|                                       | 8       | 7         | 13.13                 | 12.93                | 12.80                |                              | 0        |
|                                       | 15      | 0         | 13.09                 | 12.91                | 12.75                |                              | 0        |
| 64QAM                                 | 1       | 0         | 13.28                 | 13.06                | 12.89                | 0-2                          | 0        |
|                                       | 1       | 7         | 13.33                 | 13.17                | 13.02                |                              | 0        |
|                                       | 1       | 14        | 13.21                 | 13.07                | 12.83                |                              | 0        |
|                                       | 8       | 0         | 13.12                 | 12.97                | 12.79                | 0-3                          | 0        |
|                                       | 8       | 4         | 13.14                 | 12.95                | 12.79                |                              | 0        |
|                                       | 8       | 7         | 13.10                 | 12.94                | 12.75                |                              | 0        |
|                                       | 15      | 0         | 13.07                 | 12.94                | 12.76                |                              | 0        |

**Table 8-24**  
**LTE Band 26 (Cell) Reduced Conducted Powers -1.4 MHz Bandwidth**

| LTE Band 26 (Cell)<br>1.4 MHz Bandwidth |         |           |                       |                      |                      |                              |          |
|-----------------------------------------|---------|-----------|-----------------------|----------------------|----------------------|------------------------------|----------|
| Modulation                              | RB Size | RB Offset | Low Channel           | Mid Channel          | High Channel         | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                         |         |           | 26697<br>(814.7 MHz)  | 26865<br>(831.5 MHz) | 27033<br>(848.3 MHz) |                              |          |
|                                         |         |           | Conducted Power [dBm] |                      |                      |                              |          |
| QPSK                                    | 1       | 0         | 13.03                 | 12.82                | 12.67                | 0                            | 0        |
|                                         | 1       | 2         | 13.11                 | 12.88                | 12.71                |                              | 0        |
|                                         | 1       | 5         | 12.99                 | 12.81                | 12.63                |                              | 0        |
|                                         | 3       | 0         | 13.02                 | 12.84                | 12.67                |                              | 0        |
|                                         | 3       | 2         | 13.08                 | 12.89                | 12.73                |                              | 0        |
|                                         | 3       | 3         | 13.05                 | 12.84                | 12.66                |                              | 0        |
|                                         | 6       | 0         | 13.05                 | 12.88                | 12.69                | 0-1                          | 0        |
| 16QAM                                   | 1       | 0         | 13.32                 | 12.99                | 12.85                | 0-1                          | 0        |
|                                         | 1       | 2         | 13.34                 | 13.09                | 12.98                |                              | 0        |
|                                         | 1       | 5         | 13.30                 | 13.00                | 12.83                |                              | 0        |
|                                         | 3       | 0         | 13.09                 | 12.98                | 12.77                |                              | 0        |
|                                         | 3       | 2         | 13.15                 | 13.01                | 12.79                |                              | 0        |
|                                         | 3       | 3         | 13.14                 | 12.97                | 12.76                |                              | 0        |
|                                         | 6       | 0         | 13.07                 | 12.89                | 12.74                | 0-2                          | 0        |
| 64QAM                                   | 1       | 0         | 13.19                 | 12.96                | 12.85                | 0-2                          | 0        |
|                                         | 1       | 2         | 13.25                 | 13.03                | 12.85                |                              | 0        |
|                                         | 1       | 5         | 13.14                 | 12.98                | 12.82                |                              | 0        |
|                                         | 3       | 0         | 13.11                 | 12.91                | 12.76                |                              | 0        |
|                                         | 3       | 2         | 13.14                 | 12.98                | 12.75                |                              | 0        |
|                                         | 3       | 3         | 13.10                 | 12.95                | 12.73                |                              | 0        |
|                                         | 6       | 0         | 13.03                 | 12.84                | 12.67                | 0-3                          | 0        |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | <b>SAR EVALUATION REPORT</b> |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet | Page 32 of 100                                                                        |                                 |

## 8.2.4

## LTE Band 5 (Cell)

**Table 8-25**  
**LTE Band 5 (Cell) Maximum Conducted Powers - 10 MHz Bandwidth**

| LTE Band 5 (Cell)<br>10 MHz Bandwidth |         |           |                          |                              |          |
|---------------------------------------|---------|-----------|--------------------------|------------------------------|----------|
| Modulation                            | RB Size | RB Offset | Mid Channel              | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                       |         |           | 20525<br>(836.5 MHz)     |                              |          |
|                                       |         |           | Conducted Power<br>[dBm] |                              |          |
| QPSK                                  | 1       | 0         | 23.96                    | 0                            | 0        |
|                                       | 1       | 25        | 23.63                    |                              | 0        |
|                                       | 1       | 49        | 23.54                    |                              | 0        |
|                                       | 25      | 0         | 22.75                    | 0-1                          | 1        |
|                                       | 25      | 12        | 22.74                    |                              | 1        |
|                                       | 25      | 25        | 22.66                    |                              | 1        |
|                                       | 50      | 0         | 22.71                    |                              | 1        |
| 16QAM                                 | 1       | 0         | 22.96                    | 0-1                          | 1        |
|                                       | 1       | 25        | 22.88                    |                              | 1        |
|                                       | 1       | 49        | 22.82                    |                              | 1        |
|                                       | 25      | 0         | 21.71                    | 0-2                          | 2        |
|                                       | 25      | 12        | 21.74                    |                              | 2        |
|                                       | 25      | 25        | 21.62                    |                              | 2        |
|                                       | 50      | 0         | 21.72                    |                              | 2        |
| 64QAM                                 | 1       | 0         | 21.91                    | 0-2                          | 2        |
|                                       | 1       | 25        | 21.83                    |                              | 2        |
|                                       | 1       | 49        | 21.73                    |                              | 2        |
|                                       | 25      | 0         | 20.85                    | 0-3                          | 3        |
|                                       | 25      | 12        | 20.81                    |                              | 3        |
|                                       | 25      | 25        | 20.75                    |                              | 3        |
|                                       | 50      | 0         | 20.83                    |                              | 3        |

Note: LTE Band 5 (Cell) at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

**Table 8-26**  
**LTE Band 5 (Cell) Maximum Conducted Powers - 5 MHz Bandwidth**

| LTE Band 5 (Cell)<br>5 MHz Bandwidth |         |           |                       |                      |                      |                              |          |
|--------------------------------------|---------|-----------|-----------------------|----------------------|----------------------|------------------------------|----------|
| Modulation                           | RB Size | RB Offset | Low Channel           | Mid Channel          | High Channel         | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                      |         |           | 20425<br>(826.5 MHz)  | 20525<br>(836.5 MHz) | 20625<br>(846.5 MHz) |                              |          |
|                                      |         |           | Conducted Power [dBm] |                      |                      |                              |          |
| QPSK                                 | 1       | 0         | 24.29                 | 23.97                | 23.95                | 0                            | 0        |
|                                      | 1       | 12        | 24.23                 | 23.93                | 23.89                |                              | 0        |
|                                      | 1       | 24        | 24.21                 | 23.93                | 23.89                |                              | 0        |
|                                      | 12      | 0         | 23.26                 | 23.12                | 23.00                | 0-1                          | 1        |
|                                      | 12      | 6         | 23.27                 | 23.10                | 22.96                |                              | 1        |
|                                      | 12      | 13        | 23.23                 | 23.06                | 22.91                |                              | 1        |
|                                      | 25      | 0         | 23.24                 | 23.10                | 22.97                |                              | 1        |
| 16QAM                                | 1       | 0         | 23.66                 | 23.45                | 23.33                | 0-1                          | 1        |
|                                      | 1       | 12        | 23.59                 | 23.41                | 23.28                |                              | 1        |
|                                      | 1       | 24        | 23.58                 | 23.37                | 23.26                |                              | 1        |
|                                      | 12      | 0         | 22.30                 | 22.14                | 22.03                | 0-2                          | 2        |
|                                      | 12      | 6         | 22.30                 | 22.16                | 22.02                |                              | 2        |
|                                      | 12      | 13        | 22.26                 | 22.11                | 22.00                |                              | 2        |
|                                      | 25      | 0         | 22.24                 | 22.11                | 22.02                |                              | 2        |
| 64QAM                                | 1       | 0         | 22.02                 | 21.96                | 21.86                | 0-2                          | 2        |
|                                      | 1       | 12        | 21.98                 | 21.97                | 21.83                |                              | 2        |
|                                      | 1       | 24        | 21.90                 | 21.85                | 21.78                |                              | 2        |
|                                      | 12      | 0         | 20.91                 | 20.84                | 20.68                | 0-3                          | 3        |
|                                      | 12      | 6         | 20.89                 | 20.86                | 20.71                |                              | 3        |
|                                      | 12      | 13        | 20.84                 | 20.79                | 20.67                |                              | 3        |
|                                      | 25      | 0         | 20.84                 | 20.79                | 20.68                |                              | 3        |

|                                      |                                                                                     |                              |                       |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|-----------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  |                              | SAR EVALUATION REPORT |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                       |                                                                                       | Page 33 of 100                  |

**Table 8-27**  
**LTE Band 5 (Cell) Maximum Conducted Powers - 3 MHz Bandwidth**

| LTE Band 5 (Cell)<br>3 MHz Bandwidth |         |           |                       |                      |                      |                              |          |
|--------------------------------------|---------|-----------|-----------------------|----------------------|----------------------|------------------------------|----------|
| Modulation                           | RB Size | RB Offset | Low Channel           | Mid Channel          | High Channel         | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                      |         |           | 20415<br>(825.5 MHz)  | 20525<br>(836.5 MHz) | 20635<br>(847.5 MHz) |                              |          |
|                                      |         |           | Conducted Power [dBm] |                      |                      |                              |          |
| QPSK                                 | 1       | 0         | 24.15                 | 24.01                | 23.82                | 0                            | 0        |
|                                      | 1       | 7         | 24.21                 | 24.10                | 23.91                |                              | 0        |
|                                      | 1       | 14        | 24.09                 | 23.98                | 23.79                |                              | 0        |
|                                      | 8       | 0         | 23.26                 | 23.09                | 22.94                | 0-1                          | 1        |
|                                      | 8       | 4         | 23.24                 | 23.04                | 22.97                |                              | 1        |
|                                      | 8       | 7         | 23.23                 | 23.04                | 22.92                |                              | 1        |
|                                      | 15      | 0         | 23.24                 | 23.08                | 22.92                |                              | 1        |
| 16QAM                                | 1       | 0         | 23.36                 | 23.13                | 23.18                | 0-1                          | 1        |
|                                      | 1       | 7         | 23.42                 | 23.22                | 23.30                |                              | 1        |
|                                      | 1       | 14        | 23.28                 | 23.05                | 23.14                |                              | 1        |
|                                      | 8       | 0         | 22.31                 | 21.96                | 21.88                | 0-2                          | 2        |
|                                      | 8       | 4         | 22.29                 | 21.96                | 21.88                |                              | 2        |
|                                      | 8       | 7         | 22.25                 | 21.93                | 21.84                |                              | 2        |
|                                      | 15      | 0         | 22.19                 | 22.05                | 21.92                |                              | 2        |
| 64QAM                                | 1       | 0         | 21.98                 | 21.98                | 21.80                | 0-2                          | 2        |
|                                      | 1       | 7         | 22.08                 | 22.01                | 21.87                |                              | 2        |
|                                      | 1       | 14        | 21.87                 | 21.86                | 21.73                |                              | 2        |
|                                      | 8       | 0         | 20.86                 | 20.82                | 20.65                | 0-3                          | 3        |
|                                      | 8       | 4         | 20.85                 | 20.83                | 20.67                |                              | 3        |
|                                      | 8       | 7         | 20.82                 | 20.81                | 20.64                |                              | 3        |
|                                      | 15      | 0         | 20.86                 | 20.76                | 20.63                |                              | 3        |

**Table 8-28**  
**LTE Band 5 (Cell) Maximum Conducted Powers -1.4 MHz Bandwidth**

| LTE Band 5 (Cell)<br>1.4 MHz Bandwidth |         |           |                       |                      |                      |                              |          |
|----------------------------------------|---------|-----------|-----------------------|----------------------|----------------------|------------------------------|----------|
| Modulation                             | RB Size | RB Offset | Low Channel           | Mid Channel          | High Channel         | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                        |         |           | 20407<br>(824.7 MHz)  | 20525<br>(836.5 MHz) | 20643<br>(848.3 MHz) |                              |          |
|                                        |         |           | Conducted Power [dBm] |                      |                      |                              |          |
| QPSK                                   | 1       | 0         | 24.21                 | 23.86                | 23.74                | 0                            | 0        |
|                                        | 1       | 2         | 24.29                 | 23.92                | 23.80                |                              | 0        |
|                                        | 1       | 5         | 24.23                 | 23.85                | 23.74                |                              | 0        |
|                                        | 3       | 0         | 24.15                 | 23.95                | 23.79                |                              | 0        |
|                                        | 3       | 2         | 24.15                 | 24.01                | 23.86                |                              | 0        |
|                                        | 3       | 3         | 24.14                 | 23.95                | 23.80                |                              | 0        |
|                                        | 6       | 0         | 23.14                 | 23.02                | 22.81                | 0-1                          | 1        |
| 16QAM                                  | 1       | 0         | 23.06                 | 23.06                | 22.83                | 0-1                          | 1        |
|                                        | 1       | 2         | 23.11                 | 23.14                | 22.89                |                              | 1        |
|                                        | 1       | 5         | 23.07                 | 23.08                | 22.83                |                              | 1        |
|                                        | 3       | 0         | 23.16                 | 22.93                | 22.95                |                              | 1        |
|                                        | 3       | 2         | 23.20                 | 23.02                | 23.00                |                              | 1        |
|                                        | 3       | 3         | 23.16                 | 22.99                | 22.92                |                              | 1        |
|                                        | 6       | 0         | 22.25                 | 21.97                | 21.80                | 0-2                          | 2        |
| 64QAM                                  | 1       | 0         | 21.86                 | 21.83                | 21.66                | 0-2                          | 2        |
|                                        | 1       | 2         | 21.94                 | 21.97                | 21.79                |                              | 2        |
|                                        | 1       | 5         | 21.86                 | 21.83                | 21.68                |                              | 2        |
|                                        | 3       | 0         | 21.79                 | 21.77                | 21.62                |                              | 2        |
|                                        | 3       | 2         | 21.83                 | 21.84                | 21.65                |                              | 2        |
|                                        | 3       | 3         | 21.81                 | 21.78                | 21.58                |                              | 2        |
|                                        | 6       | 0         | 20.75                 | 20.71                | 20.56                | 0-3                          | 3        |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | <b>SAR EVALUATION REPORT</b> |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet | Page 34 of 100                                                                        |                                 |

**Table 8-29**  
**LTE Band 5 (Cell) Reduced Conducted Powers - 10 MHz Bandwidth**

| LTE Band 5 (Cell)<br>10 MHz Bandwidth |         |           |                          |                              |          |
|---------------------------------------|---------|-----------|--------------------------|------------------------------|----------|
| Modulation                            | RB Size | RB Offset | Mid Channel              | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                       |         |           | 20525<br>(836.5 MHz)     |                              |          |
|                                       |         |           | Conducted Power<br>[dBm] |                              |          |
| QPSK                                  | 1       | 0         | 15.10                    | 0                            | 0        |
|                                       | 1       | 25        | 15.06                    |                              | 0        |
|                                       | 1       | 49        | 14.93                    |                              | 0        |
|                                       | 25      | 0         | 15.13                    | 0-1                          | 0        |
|                                       | 25      | 12        | 15.12                    |                              | 0        |
|                                       | 25      | 25        | 15.03                    |                              | 0        |
|                                       | 50      | 0         | 15.06                    |                              | 0        |
| 16QAM                                 | 1       | 0         | 15.20                    | 0-1                          | 0        |
|                                       | 1       | 25        | 15.14                    |                              | 0        |
|                                       | 1       | 49        | 15.03                    |                              | 0        |
|                                       | 25      | 0         | 15.12                    | 0-2                          | 0        |
|                                       | 25      | 12        | 15.13                    |                              | 0        |
|                                       | 25      | 25        | 15.04                    |                              | 0        |
|                                       | 50      | 0         | 15.12                    |                              | 0        |
| 64QAM                                 | 1       | 0         | 15.24                    | 0-2                          | 0        |
|                                       | 1       | 25        | 15.18                    |                              | 0        |
|                                       | 1       | 49        | 15.16                    |                              | 0        |
|                                       | 25      | 0         | 15.16                    | 0-3                          | 0        |
|                                       | 25      | 12        | 15.21                    |                              | 0        |
|                                       | 25      | 25        | 15.11                    |                              | 0        |
|                                       | 50      | 0         | 15.13                    |                              | 0        |

Note: LTE Band 5 (Cell) at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

**Table 8-30**  
**LTE Band 5 (Cell) Reduced Conducted Powers - 5 MHz Bandwidth**

| LTE Band 5 (Cell)<br>5 MHz Bandwidth |         |           |                       |                      |                      |                              |          |
|--------------------------------------|---------|-----------|-----------------------|----------------------|----------------------|------------------------------|----------|
| Modulation                           | RB Size | RB Offset | Low Channel           | Mid Channel          | High Channel         | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                      |         |           | 20425<br>(826.5 MHz)  | 20525<br>(836.5 MHz) | 20625<br>(846.5 MHz) |                              |          |
|                                      |         |           | Conducted Power [dBm] |                      |                      |                              |          |
| QPSK                                 | 1       | 0         | 14.98                 | 15.00                | 14.84                | 0                            | 0        |
|                                      | 1       | 12        | 14.92                 | 14.95                | 14.81                |                              | 0        |
|                                      | 1       | 24        | 14.91                 | 14.84                | 14.80                |                              | 0        |
|                                      | 12      | 0         | 15.00                 | 15.01                | 14.89                | 0-1                          | 0        |
|                                      | 12      | 6         | 15.02                 | 15.01                | 14.91                |                              | 0        |
|                                      | 12      | 13        | 14.93                 | 14.97                | 14.84                |                              | 0        |
|                                      | 25      | 0         | 15.00                 | 14.96                | 14.85                |                              | 0        |
| 16QAM                                | 1       | 0         | 15.23                 | 15.28                | 15.09                | 0-1                          | 0        |
|                                      | 1       | 12        | 15.17                 | 15.21                | 15.07                |                              | 0        |
|                                      | 1       | 24        | 15.18                 | 15.18                | 15.05                |                              | 0        |
|                                      | 12      | 0         | 15.05                 | 15.04                | 14.95                | 0-2                          | 0        |
|                                      | 12      | 6         | 15.05                 | 15.05                | 14.92                |                              | 0        |
|                                      | 12      | 13        | 14.99                 | 15.02                | 14.88                |                              | 0        |
|                                      | 25      | 0         | 14.96                 | 15.00                | 14.83                |                              | 0        |
| 64QAM                                | 1       | 0         | 15.22                 | 15.22                | 15.09                | 0-2                          | 0        |
|                                      | 1       | 12        | 15.13                 | 15.16                | 14.97                |                              | 0        |
|                                      | 1       | 24        | 15.14                 | 15.12                | 14.97                |                              | 0        |
|                                      | 12      | 0         | 15.03                 | 15.03                | 14.92                | 0-3                          | 0        |
|                                      | 12      | 6         | 15.02                 | 15.04                | 14.91                |                              | 0        |
|                                      | 12      | 13        | 15.01                 | 14.99                | 14.87                |                              | 0        |
|                                      | 25      | 0         | 15.02                 | 14.99                | 14.88                |                              | 0        |

FCC ID: A3LSMT837P



**SAR EVALUATION REPORT**



**Approved by:**  
Quality Manager

Document S/N:

Test Dates:

DUT Type:

1M1806060119-01.A3L

06/11/18 - 06/26/18

Portable Tablet

Page 35 of 100

**Table 8-31**  
**LTE Band 5 (Cell) Reduced Conducted Powers - 3 MHz Bandwidth**

| LTE Band 5 (Cell)<br>3 MHz Bandwidth |         |           |                       |                      |                      |                              |          |
|--------------------------------------|---------|-----------|-----------------------|----------------------|----------------------|------------------------------|----------|
| Modulation                           | RB Size | RB Offset | Low Channel           | Mid Channel          | High Channel         | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                      |         |           | 20415<br>(825.5 MHz)  | 20525<br>(836.5 MHz) | 20635<br>(847.5 MHz) |                              |          |
|                                      |         |           | Conducted Power [dBm] |                      |                      |                              |          |
| QPSK                                 | 1       | 0         | 15.02                 | 14.94                | 14.82                | 0                            | 0        |
|                                      | 1       | 7         | 15.08                 | 15.04                | 14.91                |                              | 0        |
|                                      | 1       | 14        | 14.87                 | 14.93                | 14.81                |                              | 0        |
|                                      | 8       | 0         | 14.96                 | 14.97                | 14.82                | 0-1                          | 0        |
|                                      | 8       | 4         | 15.02                 | 14.97                | 14.87                |                              | 0        |
|                                      | 8       | 7         | 14.93                 | 14.92                | 14.81                |                              | 0        |
|                                      | 15      | 0         | 14.98                 | 14.94                | 14.80                |                              | 0        |
| 16QAM                                | 1       | 0         | 15.24                 | 15.15                | 15.06                | 0-1                          | 0        |
|                                      | 1       | 7         | 15.32                 | 15.27                | 15.13                |                              | 0        |
|                                      | 1       | 14        | 15.22                 | 15.17                | 15.04                |                              | 0        |
|                                      | 8       | 0         | 15.00                 | 15.04                | 14.90                | 0-2                          | 0        |
|                                      | 8       | 4         | 15.07                 | 15.02                | 14.91                |                              | 0        |
|                                      | 8       | 7         | 14.98                 | 14.98                | 14.87                |                              | 0        |
|                                      | 15      | 0         | 14.98                 | 14.95                | 14.82                |                              | 0        |
| 64QAM                                | 1       | 0         | 15.19                 | 15.17                | 15.02                | 0-2                          | 0        |
|                                      | 1       | 7         | 15.28                 | 15.23                | 15.12                |                              | 0        |
|                                      | 1       | 14        | 15.13                 | 15.13                | 14.98                |                              | 0        |
|                                      | 8       | 0         | 15.04                 | 14.97                | 14.85                | 0-3                          | 0        |
|                                      | 8       | 4         | 15.01                 | 15.03                | 14.88                |                              | 0        |
|                                      | 8       | 7         | 15.01                 | 14.96                | 14.81                |                              | 0        |
|                                      | 15      | 0         | 14.98                 | 14.95                | 14.83                |                              | 0        |

**Table 8-32**  
**LTE Band 5 (Cell) Reduced Conducted Powers -1.4 MHz Bandwidth**

| LTE Band 5 (Cell)<br>1.4 MHz Bandwidth |         |           |                       |                      |                      |                              |          |
|----------------------------------------|---------|-----------|-----------------------|----------------------|----------------------|------------------------------|----------|
| Modulation                             | RB Size | RB Offset | Low Channel           | Mid Channel          | High Channel         | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                        |         |           | 20407<br>(824.7 MHz)  | 20525<br>(836.5 MHz) | 20643<br>(848.3 MHz) |                              |          |
|                                        |         |           | Conducted Power [dBm] |                      |                      |                              |          |
| QPSK                                   | 1       | 0         | 14.91                 | 14.87                | 14.69                | 0                            | 0        |
|                                        | 1       | 2         | 14.96                 | 14.90                | 14.80                |                              | 0        |
|                                        | 1       | 5         | 14.90                 | 14.83                | 14.70                |                              | 0        |
|                                        | 3       | 0         | 14.91                 | 14.87                | 14.73                |                              | 0        |
|                                        | 3       | 2         | 14.98                 | 14.94                | 14.80                |                              | 0        |
|                                        | 3       | 3         | 14.92                 | 14.87                | 14.75                |                              | 0        |
|                                        | 6       | 0         | 14.92                 | 14.89                | 14.76                | 0-1                          | 0        |
| 16QAM                                  | 1       | 0         | 15.14                 | 15.09                | 15.03                | 0-1                          | 0        |
|                                        | 1       | 2         | 15.20                 | 15.22                | 15.03                |                              | 0        |
|                                        | 1       | 5         | 15.06                 | 15.08                | 14.94                |                              | 0        |
|                                        | 3       | 0         | 15.02                 | 14.99                | 14.89                |                              | 0        |
|                                        | 3       | 2         | 15.06                 | 15.07                | 14.91                |                              | 0        |
|                                        | 3       | 3         | 14.98                 | 15.02                | 14.85                |                              | 0        |
|                                        | 6       | 0         | 14.97                 | 14.94                | 14.82                | 0-2                          | 0        |
| 64QAM                                  | 1       | 0         | 15.10                 | 15.09                | 14.92                | 0-2                          | 0        |
|                                        | 1       | 2         | 15.15                 | 15.11                | 14.93                |                              | 0        |
|                                        | 1       | 5         | 15.06                 | 15.05                | 14.92                |                              | 0        |
|                                        | 3       | 0         | 15.03                 | 14.97                | 14.85                |                              | 0        |
|                                        | 3       | 2         | 15.09                 | 15.05                | 14.88                |                              | 0        |
|                                        | 3       | 3         | 15.00                 | 14.95                | 14.82                |                              | 0        |
|                                        | 6       | 0         | 14.97                 | 14.91                | 14.75                | 0-3                          | 0        |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | <b>SAR EVALUATION REPORT</b> |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 36 of 100                  |

## 8.2.5 LTE Band 4 (AWS)

**Table 8-33**  
**LTE Band 4 (AWS) Maximum Conducted Powers - 20 MHz Bandwidth**

| LTE Band 4 (AWS)<br>20 MHz Bandwidth |         |           |                          |                              |          |
|--------------------------------------|---------|-----------|--------------------------|------------------------------|----------|
| Modulation                           | RB Size | RB Offset | Mid Channel              | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                      |         |           | 20175<br>(1732.5 MHz)    |                              |          |
|                                      |         |           | Conducted Power<br>[dBm] |                              |          |
| QPSK                                 | 1       | 0         | 24.06                    | 0                            | 0        |
|                                      | 1       | 50        | 23.81                    |                              | 0        |
|                                      | 1       | 99        | 23.74                    |                              | 0        |
|                                      | 50      | 0         | 23.01                    | 0-1                          | 1        |
|                                      | 50      | 25        | 22.92                    |                              | 1        |
|                                      | 50      | 50        | 22.89                    |                              | 1        |
|                                      | 100     | 0         | 22.94                    |                              | 1        |
| 16QAM                                | 1       | 0         | 23.28                    | 0-1                          | 1        |
|                                      | 1       | 50        | 23.05                    |                              | 1        |
|                                      | 1       | 99        | 23.01                    |                              | 1        |
|                                      | 50      | 0         | 21.98                    | 0-2                          | 2        |
|                                      | 50      | 25        | 21.91                    |                              | 2        |
|                                      | 50      | 50        | 21.87                    |                              | 2        |
|                                      | 100     | 0         | 21.94                    |                              | 2        |
| 64QAM                                | 1       | 0         | 22.10                    | 0-2                          | 2        |
|                                      | 1       | 50        | 21.91                    |                              | 2        |
|                                      | 1       | 99        | 21.89                    |                              | 2        |
|                                      | 50      | 0         | 20.96                    | 0-3                          | 3        |
|                                      | 50      | 25        | 20.90                    |                              | 3        |
|                                      | 50      | 50        | 20.87                    |                              | 3        |
|                                      | 100     | 0         | 20.90                    |                              | 3        |

Note: LTE Band 4 (AWS) at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

**Table 8-34**  
**LTE Band 4 (AWS) Maximum Conducted Powers - 15 MHz Bandwidth**

| LTE Band 4 (AWS)<br>15 MHz Bandwidth |         |           |                       |                       |                       |                              |          |
|--------------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                           | RB Size | RB Offset | Low Channel           | Mid Channel           | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                      |         |           | 20025<br>(1717.5 MHz) | 20175<br>(1732.5 MHz) | 20325<br>(1747.5 MHz) |                              |          |
|                                      |         |           | Conducted Power [dBm] |                       |                       |                              |          |
| QPSK                                 | 1       | 0         | 24.06                 | 23.98                 | 24.13                 | 0                            | 0        |
|                                      | 1       | 36        | 23.94                 | 23.78                 | 23.92                 |                              | 0        |
|                                      | 1       | 74        | 23.95                 | 23.79                 | 23.97                 |                              | 0        |
|                                      | 36      | 0         | 22.82                 | 22.91                 | 22.94                 | 0-1                          | 1        |
|                                      | 36      | 18        | 22.97                 | 22.85                 | 22.99                 |                              | 1        |
|                                      | 36      | 37        | 22.99                 | 22.80                 | 23.03                 |                              | 1        |
|                                      | 75      | 0         | 23.04                 | 22.88                 | 23.06                 |                              | 1        |
| 16QAM                                | 1       | 0         | 23.18                 | 23.26                 | 23.35                 | 0-1                          | 1        |
|                                      | 1       | 36        | 23.16                 | 23.06                 | 23.17                 |                              | 1        |
|                                      | 1       | 74        | 23.18                 | 23.05                 | 23.30                 |                              | 1        |
|                                      | 36      | 0         | 21.79                 | 21.90                 | 22.02                 | 0-2                          | 2        |
|                                      | 36      | 18        | 21.98                 | 21.89                 | 22.05                 |                              | 2        |
|                                      | 36      | 37        | 22.01                 | 21.84                 | 22.05                 |                              | 2        |
|                                      | 75      | 0         | 22.05                 | 21.88                 | 22.08                 |                              | 2        |
| 64QAM                                | 1       | 0         | 22.21                 | 22.17                 | 22.35                 | 0-2                          | 2        |
|                                      | 1       | 36        | 22.11                 | 21.97                 | 22.18                 |                              | 2        |
|                                      | 1       | 74        | 22.17                 | 21.99                 | 22.20                 |                              | 2        |
|                                      | 36      | 0         | 20.93                 | 20.93                 | 21.16                 | 0-3                          | 3        |
|                                      | 36      | 18        | 21.06                 | 20.88                 | 21.11                 |                              | 3        |
|                                      | 36      | 37        | 21.01                 | 20.82                 | 21.07                 |                              | 3        |
|                                      | 75      | 0         | 21.03                 | 20.86                 | 21.12                 |                              | 3        |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | SAR EVALUATION REPORT        |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 37 of 100                  |

**Table 8-35**  
**LTE Band 4 (AWS) Maximum Conducted Powers - 10 MHz Bandwidth**

| LTE Band 4 (AWS)<br>10 MHz Bandwidth |         |           |                       |                       |                       |                              |          |
|--------------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                           | RB Size | RB Offset | Low Channel           | Mid Channel           | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                      |         |           | 20000<br>(1715.0 MHz) | 20175<br>(1732.5 MHz) | 20350<br>(1750.0 MHz) |                              |          |
|                                      |         |           | Conducted Power [dBm] |                       |                       |                              |          |
| QPSK                                 | 1       | 0         | 24.02                 | 23.91                 | 24.08                 | 0                            | 0        |
|                                      | 1       | 25        | 23.87                 | 23.77                 | 24.12                 |                              | 0        |
|                                      | 1       | 49        | 23.96                 | 23.78                 | 24.10                 |                              | 0        |
|                                      | 25      | 0         | 22.77                 | 22.90                 | 23.09                 | 0-1                          | 1        |
|                                      | 25      | 12        | 22.79                 | 22.86                 | 23.15                 |                              | 1        |
|                                      | 25      | 25        | 22.86                 | 22.81                 | 23.11                 |                              | 1        |
|                                      | 50      | 0         | 22.64                 | 22.83                 | 23.16                 |                              | 1        |
| 16QAM                                | 1       | 0         | 23.25                 | 23.15                 | 23.35                 | 0-1                          | 1        |
|                                      | 1       | 25        | 23.00                 | 22.96                 | 23.28                 |                              | 1        |
|                                      | 1       | 49        | 23.15                 | 23.00                 | 23.31                 |                              | 1        |
|                                      | 25      | 0         | 21.74                 | 21.89                 | 22.15                 | 0-2                          | 2        |
|                                      | 25      | 12        | 21.79                 | 21.86                 | 22.17                 |                              | 2        |
|                                      | 25      | 25        | 21.88                 | 21.79                 | 22.12                 |                              | 2        |
|                                      | 50      | 0         | 21.72                 | 21.87                 | 22.18                 |                              | 2        |
| 64QAM                                | 1       | 0         | 22.20                 | 22.03                 | 22.38                 | 0-2                          | 2        |
|                                      | 1       | 25        | 22.09                 | 21.95                 | 22.27                 |                              | 2        |
|                                      | 1       | 49        | 22.11                 | 21.98                 | 22.25                 |                              | 2        |
|                                      | 25      | 0         | 20.94                 | 20.92                 | 21.21                 | 0-3                          | 3        |
|                                      | 25      | 12        | 20.94                 | 20.88                 | 21.22                 |                              | 3        |
|                                      | 25      | 25        | 21.01                 | 20.82                 | 21.14                 |                              | 3        |
|                                      | 50      | 0         | 20.91                 | 20.88                 | 21.20                 |                              | 3        |

**Table 8-36**  
**LTE Band 4 (AWS) Maximum Conducted Powers - 5 MHz Bandwidth**

| LTE Band 4 (AWS)<br>5 MHz Bandwidth |         |           |                       |                       |                       |                              |          |
|-------------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                          | RB Size | RB Offset | Low Channel           | Mid Channel           | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                     |         |           | 19975<br>(1712.5 MHz) | 20175<br>(1732.5 MHz) | 20375<br>(1752.5 MHz) |                              |          |
|                                     |         |           | Conducted Power [dBm] |                       |                       |                              |          |
| QPSK                                | 1       | 0         | 24.03                 | 23.83                 | 24.17                 | 0                            | 0        |
|                                     | 1       | 12        | 23.94                 | 23.78                 | 24.13                 |                              | 0        |
|                                     | 1       | 24        | 23.79                 | 23.76                 | 24.09                 |                              | 0        |
|                                     | 12      | 0         | 22.93                 | 22.85                 | 23.16                 | 0-1                          | 1        |
|                                     | 12      | 6         | 22.87                 | 22.88                 | 23.13                 |                              | 1        |
|                                     | 12      | 13        | 22.76                 | 22.81                 | 23.08                 |                              | 1        |
|                                     | 25      | 0         | 22.84                 | 22.86                 | 23.14                 |                              | 1        |
| 16QAM                               | 1       | 0         | 23.29                 | 23.05                 | 23.41                 | 0-1                          | 1        |
|                                     | 1       | 12        | 23.19                 | 23.08                 | 23.35                 |                              | 1        |
|                                     | 1       | 24        | 23.07                 | 23.03                 | 23.37                 |                              | 1        |
|                                     | 12      | 0         | 22.01                 | 21.88                 | 22.20                 | 0-2                          | 2        |
|                                     | 12      | 6         | 21.95                 | 21.86                 | 22.18                 |                              | 2        |
|                                     | 12      | 13        | 21.83                 | 21.86                 | 22.15                 |                              | 2        |
|                                     | 25      | 0         | 21.81                 | 21.81                 | 22.12                 |                              | 2        |
| 64QAM                               | 1       | 0         | 22.20                 | 22.11                 | 22.33                 | 0-2                          | 2        |
|                                     | 1       | 12        | 22.18                 | 21.99                 | 22.29                 |                              | 2        |
|                                     | 1       | 24        | 22.06                 | 21.95                 | 22.32                 |                              | 2        |
|                                     | 12      | 0         | 21.08                 | 20.88                 | 21.19                 | 0-3                          | 3        |
|                                     | 12      | 6         | 21.01                 | 20.89                 | 21.18                 |                              | 3        |
|                                     | 12      | 13        | 20.90                 | 20.81                 | 21.13                 |                              | 3        |
|                                     | 25      | 0         | 20.91                 | 20.84                 | 21.14                 |                              | 3        |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | <b>SAR EVALUATION REPORT</b> |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 38 of 100                  |

**Table 8-37**  
**LTE Band 4 (AWS) Maximum Conducted Powers - 3 MHz Bandwidth**

| LTE Band 4 (AWS)<br>3 MHz Bandwidth |         |           |                       |                       |                       |                              |          |
|-------------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                          | RB Size | RB Offset | Low Channel           | Mid Channel           | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                     |         |           | 19965<br>(1711.5 MHz) | 20175<br>(1732.5 MHz) | 20385<br>(1753.5 MHz) |                              |          |
|                                     |         |           | Conducted Power [dBm] |                       |                       |                              |          |
| QPSK                                | 1       | 0         | 23.98                 | 23.83                 | 24.21                 | 0                            | 0        |
|                                     | 1       | 7         | 23.94                 | 23.89                 | 24.27                 |                              | 0        |
|                                     | 1       | 14        | 23.71                 | 23.77                 | 24.20                 |                              | 0        |
|                                     | 8       | 0         | 23.02                 | 22.84                 | 23.27                 | 0-1                          | 1        |
|                                     | 8       | 4         | 22.96                 | 22.84                 | 23.26                 |                              | 1        |
|                                     | 8       | 7         | 22.85                 | 22.83                 | 23.25                 |                              | 1        |
|                                     | 15      | 0         | 22.80                 | 22.81                 | 23.29                 |                              | 1        |
| 16QAM                               | 1       | 0         | 23.17                 | 23.07                 | 23.40                 | 0-1                          | 1        |
|                                     | 1       | 7         | 23.23                 | 23.09                 | 23.51                 |                              | 1        |
|                                     | 1       | 14        | 23.06                 | 23.03                 | 23.50                 |                              | 1        |
|                                     | 8       | 0         | 21.99                 | 21.88                 | 22.32                 | 0-2                          | 2        |
|                                     | 8       | 4         | 21.91                 | 21.89                 | 22.35                 |                              | 2        |
|                                     | 8       | 7         | 21.77                 | 21.89                 | 22.30                 |                              | 2        |
|                                     | 15      | 0         | 21.86                 | 21.84                 | 22.26                 |                              | 2        |
| 64QAM                               | 1       | 0         | 22.16                 | 21.99                 | 22.46                 | 0-2                          | 2        |
|                                     | 1       | 7         | 22.21                 | 22.10                 | 22.51                 |                              | 2        |
|                                     | 1       | 14        | 22.06                 | 21.99                 | 22.44                 |                              | 2        |
|                                     | 8       | 0         | 21.07                 | 20.89                 | 21.33                 | 0-3                          | 3        |
|                                     | 8       | 4         | 21.03                 | 20.91                 | 21.36                 |                              | 3        |
|                                     | 8       | 7         | 20.94                 | 20.88                 | 21.30                 |                              | 3        |
|                                     | 15      | 0         | 21.03                 | 20.86                 | 21.30                 |                              | 3        |

**Table 8-38**  
**LTE Band 4 (AWS) Maximum Conducted Powers -1.4 MHz Bandwidth**

| LTE Band 4 (AWS)<br>1.4 MHz Bandwidth |         |           |                       |                       |                       |                              |          |
|---------------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                            | RB Size | RB Offset | Low Channel           | Mid Channel           | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                       |         |           | 19957<br>(1710.7 MHz) | 20175<br>(1732.5 MHz) | 20393<br>(1754.3 MHz) |                              |          |
|                                       |         |           | Conducted Power [dBm] |                       |                       |                              |          |
| QPSK                                  | 1       | 0         | 23.89                 | 23.75                 | 24.15                 | 0                            | 0        |
|                                       | 1       | 2         | 23.93                 | 23.81                 | 24.21                 |                              | 0        |
|                                       | 1       | 5         | 23.85                 | 23.74                 | 24.15                 |                              | 0        |
|                                       | 3       | 0         | 23.87                 | 23.78                 | 24.18                 |                              | 0        |
|                                       | 3       | 2         | 23.85                 | 23.78                 | 24.22                 |                              | 0        |
|                                       | 3       | 3         | 23.73                 | 23.79                 | 24.19                 |                              | 0        |
|                                       | 6       | 0         | 22.90                 | 22.80                 | 23.21                 | 0-1                          | 1        |
| 16QAM                                 | 1       | 0         | 23.10                 | 22.96                 | 23.38                 | 0-1                          | 1        |
|                                       | 1       | 2         | 23.23                 | 23.13                 | 23.46                 |                              | 1        |
|                                       | 1       | 5         | 23.04                 | 23.04                 | 23.41                 |                              | 1        |
|                                       | 3       | 0         | 22.99                 | 22.92                 | 23.27                 |                              | 1        |
|                                       | 3       | 2         | 23.05                 | 22.93                 | 23.30                 |                              | 1        |
|                                       | 3       | 3         | 22.90                 | 22.86                 | 23.28                 |                              | 1        |
|                                       | 6       | 0         | 21.98                 | 21.83                 | 22.29                 | 0-2                          | 2        |
| 64QAM                                 | 1       | 0         | 22.11                 | 21.95                 | 22.37                 | 0-2                          | 2        |
|                                       | 1       | 2         | 22.20                 | 22.03                 | 22.42                 |                              | 2        |
|                                       | 1       | 5         | 22.10                 | 21.90                 | 22.36                 |                              | 2        |
|                                       | 3       | 0         | 21.99                 | 21.88                 | 22.27                 |                              | 2        |
|                                       | 3       | 2         | 22.06                 | 21.93                 | 22.32                 |                              | 2        |
|                                       | 3       | 3         | 22.00                 | 21.88                 | 22.28                 |                              | 2        |
|                                       | 6       | 0         | 20.98                 | 20.80                 | 21.23                 | 0-3                          | 3        |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | <b>SAR EVALUATION REPORT</b> |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet | Page 39 of 100                                                                        |                                 |



**Table 8-39**  
**LTE Band 4 (AWS) Reduced Conducted Powers - 20 MHz Bandwidth**

| LTE Band 4 (AWS)<br>20 MHz Bandwidth |         |           |                          |                              |          |
|--------------------------------------|---------|-----------|--------------------------|------------------------------|----------|
| Modulation                           | RB Size | RB Offset | Mid Channel              | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                      |         |           | 20175<br>(1732.5 MHz)    |                              |          |
|                                      |         |           | Conducted Power<br>[dBm] |                              |          |
| QPSK                                 | 1       | 0         | 12.01                    | 0                            | 0        |
|                                      | 1       | 50        | 11.79                    |                              | 0        |
|                                      | 1       | 99        | 11.75                    |                              | 0        |
|                                      | 50      | 0         | 11.95                    | 0-1                          | 0        |
|                                      | 50      | 25        | 11.82                    |                              | 0        |
|                                      | 50      | 50        | 11.77                    |                              | 0        |
|                                      | 100     | 0         | 11.86                    |                              | 0        |
| 16QAM                                | 1       | 0         | 12.12                    | 0-1                          | 0        |
|                                      | 1       | 50        | 12.00                    |                              | 0        |
|                                      | 1       | 99        | 11.82                    |                              | 0        |
|                                      | 50      | 0         | 11.92                    | 0-2                          | 0        |
|                                      | 50      | 25        | 11.86                    |                              | 0        |
|                                      | 50      | 50        | 11.82                    |                              | 0        |
|                                      | 100     | 0         | 11.87                    |                              | 0        |
| 64QAM                                | 1       | 0         | 12.11                    | 0-2                          | 0        |
|                                      | 1       | 50        | 11.96                    |                              | 0        |
|                                      | 1       | 99        | 11.95                    |                              | 0        |
|                                      | 50      | 0         | 11.92                    | 0-3                          | 0        |
|                                      | 50      | 25        | 11.87                    |                              | 0        |
|                                      | 50      | 50        | 11.82                    |                              | 0        |
|                                      | 100     | 0         | 11.85                    |                              | 0        |

Note: LTE Band 4 (AWS) at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

**Table 8-40**  
**LTE Band 4 (AWS) Reduced Conducted Powers - 15 MHz Bandwidth**

| LTE Band 4 (AWS)<br>15 MHz Bandwidth |         |           |                       |                       |                       |                              |          |
|--------------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                           | RB Size | RB Offset | Low Channel           | Mid Channel           | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                      |         |           | 20025<br>(1717.5 MHz) | 20175<br>(1732.5 MHz) | 20325<br>(1747.5 MHz) |                              |          |
|                                      |         |           | Conducted Power [dBm] |                       |                       |                              |          |
| QPSK                                 | 1       | 0         | 12.21                 | 12.04                 | 12.23                 | 0                            | 0        |
|                                      | 1       | 36        | 12.02                 | 11.82                 | 12.12                 |                              | 0        |
|                                      | 1       | 74        | 12.03                 | 11.78                 | 12.10                 |                              | 0        |
|                                      | 36      | 0         | 12.18                 | 11.97                 | 12.27                 | 0-1                          | 0        |
|                                      | 36      | 18        | 12.11                 | 11.94                 | 12.20                 |                              | 0        |
|                                      | 36      | 37        | 12.09                 | 11.88                 | 12.15                 |                              | 0        |
|                                      | 75      | 0         | 12.13                 | 11.94                 | 12.23                 |                              | 0        |
| 16QAM                                | 1       | 0         | 12.29                 | 12.21                 | 12.42                 | 0-1                          | 0        |
|                                      | 1       | 36        | 12.18                 | 12.10                 | 12.24                 |                              | 0        |
|                                      | 1       | 74        | 12.26                 | 12.07                 | 12.36                 |                              | 0        |
|                                      | 36      | 0         | 12.14                 | 11.97                 | 12.23                 | 0-2                          | 0        |
|                                      | 36      | 18        | 12.12                 | 11.95                 | 12.21                 |                              | 0        |
|                                      | 36      | 37        | 12.05                 | 11.93                 | 12.16                 |                              | 0        |
|                                      | 75      | 0         | 12.09                 | 11.95                 | 12.20                 |                              | 0        |
| 64QAM                                | 1       | 0         | 12.34                 | 12.23                 | 12.51                 | 0-2                          | 0        |
|                                      | 1       | 36        | 12.26                 | 12.09                 | 12.36                 |                              | 0        |
|                                      | 1       | 74        | 12.20                 | 12.12                 | 12.28                 |                              | 0        |
|                                      | 36      | 0         | 12.13                 | 12.00                 | 12.27                 | 0-3                          | 0        |
|                                      | 36      | 18        | 12.11                 | 11.93                 | 12.22                 |                              | 0        |
|                                      | 36      | 37        | 12.10                 | 11.90                 | 12.19                 |                              | 0        |
|                                      | 75      | 0         | 12.09                 | 11.96                 | 12.20                 |                              | 0        |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | SAR EVALUATION REPORT        |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 40 of 100                  |

**Table 8-41**  
**LTE Band 4 (AWS) Reduced Conducted Powers - 10 MHz Bandwidth**

| LTE Band 4 (AWS)<br>10 MHz Bandwidth |         |           |                       |                       |                       |                              |          |
|--------------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                           | RB Size | RB Offset | Low Channel           | Mid Channel           | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                      |         |           | 20000<br>(1715.0 MHz) | 20175<br>(1732.5 MHz) | 20350<br>(1750.0 MHz) |                              |          |
|                                      |         |           | Conducted Power [dBm] |                       |                       |                              |          |
| QPSK                                 | 1       | 0         | 12.14                 | 11.82                 | 12.23                 | 0                            | 0        |
|                                      | 1       | 25        | 11.99                 | 11.75                 | 12.12                 |                              | 0        |
|                                      | 1       | 49        | 11.98                 | 11.74                 | 12.13                 |                              | 0        |
|                                      | 25      | 0         | 12.15                 | 11.88                 | 12.27                 | 0-1                          | 0        |
|                                      | 25      | 12        | 12.15                 | 11.89                 | 12.23                 |                              | 0        |
|                                      | 25      | 25        | 12.11                 | 11.83                 | 12.20                 |                              | 0        |
|                                      | 50      | 0         | 12.05                 | 11.80                 | 12.16                 |                              | 0        |
| 16QAM                                | 1       | 0         | 12.28                 | 12.12                 | 12.35                 | 0-1                          | 0        |
|                                      | 1       | 25        | 12.15                 | 11.91                 | 12.27                 |                              | 0        |
|                                      | 1       | 49        | 12.10                 | 11.91                 | 12.21                 |                              | 0        |
|                                      | 25      | 0         | 12.05                 | 11.84                 | 12.15                 | 0-2                          | 0        |
|                                      | 25      | 12        | 12.03                 | 11.88                 | 12.14                 |                              | 0        |
|                                      | 25      | 25        | 11.96                 | 11.76                 | 12.06                 |                              | 0        |
|                                      | 50      | 0         | 12.01                 | 11.82                 | 12.12                 |                              | 0        |
| 64QAM                                | 1       | 0         | 12.25                 | 12.03                 | 12.36                 | 0-2                          | 0        |
|                                      | 1       | 25        | 12.19                 | 11.97                 | 12.28                 |                              | 0        |
|                                      | 1       | 49        | 12.14                 | 11.96                 | 12.23                 |                              | 0        |
|                                      | 25      | 0         | 12.15                 | 11.96                 | 12.28                 | 0-3                          | 0        |
|                                      | 25      | 12        | 12.11                 | 11.94                 | 12.25                 |                              | 0        |
|                                      | 25      | 25        | 12.07                 | 11.88                 | 12.21                 |                              | 0        |
|                                      | 50      | 0         | 12.13                 | 11.91                 | 12.26                 |                              | 0        |

**Table 8-42**  
**LTE Band 4 (AWS) Reduced Conducted Powers - 5 MHz Bandwidth**

| LTE Band 4 (AWS)<br>5 MHz Bandwidth |         |           |                       |                       |                       |                              |          |
|-------------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                          | RB Size | RB Offset | Low Channel           | Mid Channel           | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                     |         |           | 19975<br>(1712.5 MHz) | 20175<br>(1732.5 MHz) | 20375<br>(1752.5 MHz) |                              |          |
|                                     |         |           | Conducted Power [dBm] |                       |                       |                              |          |
| QPSK                                | 1       | 0         | 12.05                 | 11.78                 | 12.16                 | 0                            | 0        |
|                                     | 1       | 12        | 11.97                 | 11.73                 | 12.09                 |                              | 0        |
|                                     | 1       | 24        | 11.98                 | 11.71                 | 12.08                 |                              | 0        |
|                                     | 12      | 0         | 12.08                 | 11.81                 | 12.16                 | 0-1                          | 0        |
|                                     | 12      | 6         | 12.05                 | 11.80                 | 12.15                 |                              | 0        |
|                                     | 12      | 13        | 12.04                 | 11.75                 | 12.14                 |                              | 0        |
|                                     | 25      | 0         | 12.05                 | 11.77                 | 12.14                 |                              | 0        |
| 16QAM                               | 1       | 0         | 12.22                 | 12.04                 | 12.36                 | 0-1                          | 0        |
|                                     | 1       | 12        | 12.11                 | 11.96                 | 12.27                 |                              | 0        |
|                                     | 1       | 24        | 12.14                 | 11.90                 | 12.14                 |                              | 0        |
|                                     | 12      | 0         | 12.02                 | 11.85                 | 12.17                 | 0-2                          | 0        |
|                                     | 12      | 6         | 12.03                 | 11.86                 | 12.15                 |                              | 0        |
|                                     | 12      | 13        | 12.02                 | 11.81                 | 12.10                 |                              | 0        |
|                                     | 25      | 0         | 11.99                 | 11.79                 | 12.09                 |                              | 0        |
| 64QAM                               | 1       | 0         | 12.22                 | 12.02                 | 12.32                 | 0-2                          | 0        |
|                                     | 1       | 12        | 12.19                 | 11.98                 | 12.29                 |                              | 0        |
|                                     | 1       | 24        | 12.19                 | 11.93                 | 12.26                 |                              | 0        |
|                                     | 12      | 0         | 12.09                 | 11.90                 | 12.20                 | 0-3                          | 0        |
|                                     | 12      | 6         | 12.11                 | 11.89                 | 12.24                 |                              | 0        |
|                                     | 12      | 13        | 12.05                 | 11.85                 | 12.19                 |                              | 0        |
|                                     | 25      | 0         | 12.09                 | 11.87                 | 12.21                 |                              | 0        |

|                                      |                                                                                                                                                                                                        |                                 |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  <b>SAR EVALUATION REPORT</b>  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                                                                                                                                     | DUT Type:<br>Portable Tablet    |
| Page 41 of 100                       |                                                                                                                                                                                                        |                                 |

**Table 8-43**  
**LTE Band 4 (AWS) Reduced Conducted Powers - 3 MHz Bandwidth**

| LTE Band 4 (AWS)<br>3 MHz Bandwidth |         |           |                       |                       |                       |                              |          |
|-------------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                          | RB Size | RB Offset | Low Channel           | Mid Channel           | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                     |         |           | 19965<br>(1711.5 MHz) | 20175<br>(1732.5 MHz) | 20385<br>(1753.5 MHz) |                              |          |
|                                     |         |           | Conducted Power [dBm] |                       |                       |                              |          |
| QPSK                                | 1       | 0         | 12.03                 | 11.82                 | 12.25                 | 0                            | 0        |
|                                     | 1       | 7         | 12.16                 | 11.88                 | 12.36                 |                              | 0        |
|                                     | 1       | 14        | 12.01                 | 11.74                 | 12.20                 |                              | 0        |
|                                     | 8       | 0         | 12.08                 | 11.84                 | 12.28                 | 0-1                          | 0        |
|                                     | 8       | 4         | 12.11                 | 11.81                 | 12.28                 |                              | 0        |
|                                     | 8       | 7         | 12.08                 | 11.80                 | 12.29                 |                              | 0        |
|                                     | 15      | 0         | 12.11                 | 11.82                 | 12.25                 |                              | 0        |
| 16QAM                               | 1       | 0         | 12.21                 | 11.99                 | 12.33                 | 0-1                          | 0        |
|                                     | 1       | 7         | 12.33                 | 11.97                 | 12.49                 |                              | 0        |
|                                     | 1       | 14        | 12.19                 | 11.95                 | 12.37                 |                              | 0        |
|                                     | 8       | 0         | 12.12                 | 11.88                 | 12.31                 | 0-2                          | 0        |
|                                     | 8       | 4         | 12.12                 | 11.89                 | 12.31                 |                              | 0        |
|                                     | 8       | 7         | 12.09                 | 11.88                 | 12.29                 |                              | 0        |
|                                     | 15      | 0         | 12.09                 | 11.85                 | 12.28                 |                              | 0        |
| 64QAM                               | 1       | 0         | 12.25                 | 11.94                 | 12.40                 | 0-2                          | 0        |
|                                     | 1       | 7         | 12.29                 | 12.10                 | 12.43                 |                              | 0        |
|                                     | 1       | 14        | 12.16                 | 11.91                 | 12.34                 |                              | 0        |
|                                     | 8       | 0         | 12.08                 | 11.87                 | 12.28                 | 0-3                          | 0        |
|                                     | 8       | 4         | 12.09                 | 11.88                 | 12.32                 |                              | 0        |
|                                     | 8       | 7         | 12.02                 | 11.85                 | 12.29                 |                              | 0        |
|                                     | 15      | 0         | 12.07                 | 11.84                 | 12.29                 |                              | 0        |

**Table 8-44**  
**LTE Band 4 (AWS) Reduced Conducted Powers -1.4 MHz Bandwidth**

| LTE Band 4 (AWS)<br>1.4 MHz Bandwidth |         |           |                       |                       |                       |                              |          |
|---------------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                            | RB Size | RB Offset | Low Channel           | Mid Channel           | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                       |         |           | 19957<br>(1710.7 MHz) | 20175<br>(1732.5 MHz) | 20393<br>(1754.3 MHz) |                              |          |
|                                       |         |           | Conducted Power [dBm] |                       |                       |                              |          |
| QPSK                                  | 1       | 0         | 11.97                 | 11.67                 | 12.18                 | 0                            | 0        |
|                                       | 1       | 2         | 12.03                 | 11.75                 | 12.21                 |                              | 0        |
|                                       | 1       | 5         | 11.97                 | 11.67                 | 12.14                 |                              | 0        |
|                                       | 3       | 0         | 11.99                 | 11.74                 | 12.17                 |                              | 0        |
|                                       | 3       | 2         | 12.03                 | 11.76                 | 12.21                 |                              | 0        |
|                                       | 3       | 3         | 11.98                 | 11.74                 | 12.15                 |                              | 0        |
|                                       | 6       | 0         | 12.00                 | 11.74                 | 12.18                 | 0-1                          | 0        |
| 16QAM                                 | 1       | 0         | 12.12                 | 11.90                 | 12.40                 | 0-1                          | 0        |
|                                       | 1       | 2         | 12.14                 | 12.03                 | 12.39                 |                              | 0        |
|                                       | 1       | 5         | 12.14                 | 11.91                 | 12.35                 |                              | 0        |
|                                       | 3       | 0         | 12.08                 | 11.94                 | 12.31                 |                              | 0        |
|                                       | 3       | 2         | 12.17                 | 11.95                 | 12.38                 |                              | 0        |
|                                       | 3       | 3         | 12.08                 | 11.82                 | 12.27                 |                              | 0        |
|                                       | 6       | 0         | 12.01                 | 11.82                 | 12.20                 | 0-2                          | 0        |
| 64QAM                                 | 1       | 0         | 12.18                 | 11.88                 | 12.28                 | 0-2                          | 0        |
|                                       | 1       | 2         | 12.22                 | 11.92                 | 12.41                 |                              | 0        |
|                                       | 1       | 5         | 12.05                 | 11.91                 | 12.31                 |                              | 0        |
|                                       | 3       | 0         | 12.04                 | 11.83                 | 12.27                 |                              | 0        |
|                                       | 3       | 2         | 12.09                 | 11.92                 | 12.31                 |                              | 0        |
|                                       | 3       | 3         | 12.07                 | 11.83                 | 12.26                 |                              | 0        |
|                                       | 6       | 0         | 12.00                 | 11.75                 | 12.21                 | 0-3                          | 0        |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | SAR EVALUATION REPORT        |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 42 of 100                  |

## 8.2.6

## LTE Band 25 (PCS)

**Table 8-45**  
**LTE Band 25 (PCS) Maximum Conducted Powers - 20 MHz Bandwidth**

| LTE Band 25 (PCS)<br>20 MHz Bandwidth |         |           |                       |                       |                       |                              |          |
|---------------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                            | RB Size | RB Offset | Low Channel           | Mid Channel           | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                       |         |           | 26140<br>(1860.0 MHz) | 26365<br>(1882.5 MHz) | 26590<br>(1905.0 MHz) |                              |          |
|                                       |         |           | Conducted Power [dBm] |                       |                       |                              |          |
| QPSK                                  | 1       | 0         | 24.12                 | 23.92                 | 24.41                 | 0                            | 0        |
|                                       | 1       | 50        | 23.86                 | 23.72                 | 24.21                 |                              | 0        |
|                                       | 1       | 99        | 23.78                 | 23.65                 | 24.19                 |                              | 0        |
|                                       | 50      | 0         | 23.04                 | 22.82                 | 23.37                 | 0-1                          | 1        |
|                                       | 50      | 25        | 22.96                 | 22.77                 | 23.28                 |                              | 1        |
|                                       | 50      | 50        | 22.90                 | 22.69                 | 23.25                 |                              | 1        |
|                                       | 100     | 0         | 22.98                 | 22.76                 | 23.32                 |                              | 1        |
| 16QAM                                 | 1       | 0         | 23.33                 | 23.12                 | 23.61                 | 0-1                          | 1        |
|                                       | 1       | 50        | 23.16                 | 22.96                 | 23.40                 |                              | 1        |
|                                       | 1       | 99        | 23.06                 | 22.90                 | 23.38                 |                              | 1        |
|                                       | 50      | 0         | 22.06                 | 21.85                 | 22.34                 | 0-2                          | 2        |
|                                       | 50      | 25        | 21.96                 | 21.77                 | 22.29                 |                              | 2        |
|                                       | 50      | 50        | 21.89                 | 21.74                 | 22.21                 |                              | 2        |
|                                       | 100     | 0         | 21.98                 | 21.79                 | 22.29                 |                              | 2        |
| 64QAM                                 | 1       | 0         | 22.23                 | 22.02                 | 22.59                 | 0-2                          | 2        |
|                                       | 1       | 50        | 22.10                 | 21.86                 | 22.29                 |                              | 2        |
|                                       | 1       | 99        | 21.81                 | 21.74                 | 22.39                 |                              | 2        |
|                                       | 50      | 0         | 21.07                 | 20.88                 | 21.41                 | 0-3                          | 3        |
|                                       | 50      | 25        | 21.01                 | 20.82                 | 21.27                 |                              | 3        |
|                                       | 50      | 50        | 20.94                 | 20.75                 | 21.27                 |                              | 3        |
|                                       | 100     | 0         | 21.00                 | 20.81                 | 21.31                 |                              | 3        |

**Table 8-46**  
**LTE Band 25 (PCS) Maximum Conducted Powers - 15 MHz Bandwidth**

| LTE Band 25 (PCS)<br>15 MHz Bandwidth |         |           |                       |                       |                       |                              |          |
|---------------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                            | RB Size | RB Offset | Low Channel           | Mid Channel           | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                       |         |           | 26115<br>(1857.5 MHz) | 26365<br>(1882.5 MHz) | 26615<br>(1907.5 MHz) |                              |          |
|                                       |         |           | Conducted Power [dBm] |                       |                       |                              |          |
| QPSK                                  | 1       | 0         | 24.10                 | 23.92                 | 24.38                 | 0                            | 0        |
|                                       | 1       | 36        | 23.94                 | 23.71                 | 24.20                 |                              | 0        |
|                                       | 1       | 74        | 23.93                 | 23.73                 | 24.18                 |                              | 0        |
|                                       | 36      | 0         | 23.07                 | 22.80                 | 23.31                 | 0-1                          | 1        |
|                                       | 36      | 18        | 23.05                 | 22.78                 | 23.28                 |                              | 1        |
|                                       | 36      | 37        | 22.99                 | 22.74                 | 23.24                 |                              | 1        |
|                                       | 75      | 0         | 23.01                 | 22.77                 | 23.27                 |                              | 1        |
| 16QAM                                 | 1       | 0         | 23.31                 | 23.14                 | 23.59                 | 0-1                          | 1        |
|                                       | 1       | 36        | 23.13                 | 22.94                 | 23.38                 |                              | 1        |
|                                       | 1       | 74        | 23.15                 | 23.03                 | 23.44                 |                              | 1        |
|                                       | 36      | 0         | 22.08                 | 21.86                 | 22.34                 | 0-2                          | 2        |
|                                       | 36      | 18        | 22.03                 | 21.79                 | 22.29                 |                              | 2        |
|                                       | 36      | 37        | 21.97                 | 21.75                 | 22.27                 |                              | 2        |
|                                       | 75      | 0         | 22.03                 | 21.80                 | 22.31                 |                              | 2        |
| 64QAM                                 | 1       | 0         | 22.36                 | 22.07                 | 22.58                 | 0-2                          | 2        |
|                                       | 1       | 36        | 22.19                 | 21.94                 | 22.45                 |                              | 2        |
|                                       | 1       | 74        | 22.15                 | 21.90                 | 22.44                 |                              | 2        |
|                                       | 36      | 0         | 21.08                 | 20.84                 | 21.34                 | 0-3                          | 3        |
|                                       | 36      | 18        | 21.04                 | 20.81                 | 21.30                 |                              | 3        |
|                                       | 36      | 37        | 21.01                 | 20.75                 | 21.26                 |                              | 3        |
|                                       | 75      | 0         | 21.05                 | 20.81                 | 21.29                 |                              | 3        |

FCC ID: A3LSMT837P



SAR EVALUATION REPORT



Approved by:  
Quality Manager

Document S/N:

Test Dates:

DUT Type:

Page 43 of 100

1M1806060119-01.A3L

06/11/18 - 06/26/18

Portable Tablet

**Table 8-47**  
**LTE Band 25 (PCS) Maximum Conducted Powers - 10 MHz Bandwidth**

| LTE Band 25 (PCS)<br>10 MHz Bandwidth |         |           |                       |                       |                       |                              |          |
|---------------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                            | RB Size | RB Offset | Low Channel           | Mid Channel           | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                       |         |           | 26090<br>(1855.0 MHz) | 26365<br>(1882.5 MHz) | 26640<br>(1910.0 MHz) |                              |          |
|                                       |         |           | Conducted Power [dBm] |                       |                       |                              |          |
| QPSK                                  | 1       | 0         | 24.05                 | 23.80                 | 24.40                 | 0                            | 0        |
|                                       | 1       | 25        | 23.95                 | 23.71                 | 24.28                 |                              | 0        |
|                                       | 1       | 49        | 23.93                 | 23.68                 | 24.27                 |                              | 0        |
|                                       | 25      | 0         | 23.03                 | 22.76                 | 23.37                 | 0-1                          | 1        |
|                                       | 25      | 12        | 23.00                 | 22.80                 | 23.37                 |                              | 1        |
|                                       | 25      | 25        | 22.99                 | 22.71                 | 23.31                 |                              | 1        |
|                                       | 50      | 0         | 23.02                 | 22.77                 | 23.34                 |                              | 1        |
| 16QAM                                 | 1       | 0         | 23.19                 | 23.02                 | 23.56                 | 0-1                          | 1        |
|                                       | 1       | 25        | 23.19                 | 22.91                 | 23.60                 |                              | 1        |
|                                       | 1       | 49        | 23.15                 | 22.92                 | 23.43                 |                              | 1        |
|                                       | 25      | 0         | 22.06                 | 21.77                 | 22.36                 | 0-2                          | 2        |
|                                       | 25      | 12        | 22.03                 | 21.76                 | 22.37                 |                              | 2        |
|                                       | 25      | 25        | 21.95                 | 21.74                 | 22.30                 |                              | 2        |
|                                       | 50      | 0         | 22.02                 | 21.78                 | 22.36                 |                              | 2        |
| 64QAM                                 | 1       | 0         | 22.22                 | 21.97                 | 22.55                 | 0-2                          | 2        |
|                                       | 1       | 25        | 22.11                 | 21.87                 | 22.48                 |                              | 2        |
|                                       | 1       | 49        | 22.08                 | 21.92                 | 22.46                 |                              | 2        |
|                                       | 25      | 0         | 21.07                 | 20.81                 | 21.35                 | 0-3                          | 3        |
|                                       | 25      | 12        | 21.04                 | 20.79                 | 21.35                 |                              | 3        |
|                                       | 25      | 25        | 21.02                 | 20.74                 | 21.33                 |                              | 3        |
|                                       | 50      | 0         | 21.03                 | 20.79                 | 21.35                 |                              | 3        |

**Table 8-48**  
**LTE Band 25 (PCS) Maximum Conducted Powers - 5 MHz Bandwidth**

| LTE Band 25 (PCS)<br>5 MHz Bandwidth |         |           |                       |                       |                       |                              |          |
|--------------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                           | RB Size | RB Offset | Low Channel           | Mid Channel           | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                      |         |           | 26065<br>(1852.5 MHz) | 26365<br>(1882.5 MHz) | 26665<br>(1912.5 MHz) |                              |          |
|                                      |         |           | Conducted Power [dBm] |                       |                       |                              |          |
| QPSK                                 | 1       | 0         | 23.95                 | 23.74                 | 24.30                 | 0                            | 0        |
|                                      | 1       | 12        | 23.92                 | 23.65                 | 24.26                 |                              | 0        |
|                                      | 1       | 24        | 23.93                 | 23.70                 | 24.26                 |                              | 0        |
|                                      | 12      | 0         | 22.98                 | 22.75                 | 23.30                 | 0-1                          | 1        |
|                                      | 12      | 6         | 23.00                 | 22.74                 | 23.29                 |                              | 1        |
|                                      | 12      | 13        | 22.96                 | 22.73                 | 23.27                 |                              | 1        |
|                                      | 25      | 0         | 22.98                 | 22.72                 | 23.27                 |                              | 1        |
| 16QAM                                | 1       | 0         | 23.22                 | 22.94                 | 23.52                 | 0-1                          | 1        |
|                                      | 1       | 12        | 23.20                 | 22.94                 | 23.43                 |                              | 1        |
|                                      | 1       | 24        | 23.12                 | 22.88                 | 23.45                 |                              | 1        |
|                                      | 12      | 0         | 22.02                 | 21.75                 | 22.32                 | 0-2                          | 2        |
|                                      | 12      | 6         | 22.02                 | 21.77                 | 22.32                 |                              | 2        |
|                                      | 12      | 13        | 22.00                 | 21.75                 | 22.30                 |                              | 2        |
|                                      | 25      | 0         | 21.99                 | 21.73                 | 22.27                 |                              | 2        |
| 64QAM                                | 1       | 0         | 22.18                 | 21.90                 | 22.47                 | 0-2                          | 2        |
|                                      | 1       | 12        | 22.13                 | 21.89                 | 22.47                 |                              | 2        |
|                                      | 1       | 24        | 22.11                 | 21.87                 | 22.40                 |                              | 2        |
|                                      | 12      | 0         | 21.01                 | 20.72                 | 21.22                 | 0-3                          | 3        |
|                                      | 12      | 6         | 21.02                 | 20.75                 | 21.22                 |                              | 3        |
|                                      | 12      | 13        | 21.01                 | 20.79                 | 21.22                 |                              | 3        |
|                                      | 25      | 0         | 20.99                 | 20.71                 | 21.29                 |                              | 3        |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | SAR EVALUATION REPORT        |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 44 of 100                  |

**Table 8-49**  
**LTE Band 25 (PCS) Maximum Conducted Powers - 3 MHz Bandwidth**

| LTE Band 25 (PCS)<br>3 MHz Bandwidth |         |           |                       |                       |                       |                              |          |
|--------------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                           | RB Size | RB Offset | Low Channel           | Mid Channel           | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                      |         |           | 26055<br>(1851.5 MHz) | 26365<br>(1882.5 MHz) | 26675<br>(1913.5 MHz) |                              |          |
|                                      |         |           | Conducted Power [dBm] |                       |                       |                              |          |
| QPSK                                 | 1       | 0         | 23.91                 | 23.68                 | 24.37                 | 0                            | 0        |
|                                      | 1       | 7         | 24.02                 | 23.77                 | 24.50                 |                              | 0        |
|                                      | 1       | 14        | 23.91                 | 23.67                 | 24.29                 |                              | 0        |
|                                      | 8       | 0         | 22.96                 | 22.69                 | 23.37                 | 0-1                          | 1        |
|                                      | 8       | 4         | 22.97                 | 22.70                 | 23.38                 |                              | 1        |
|                                      | 8       | 7         | 22.97                 | 22.70                 | 23.39                 |                              | 1        |
|                                      | 15      | 0         | 22.93                 | 22.70                 | 23.20                 |                              | 1        |
| 16QAM                                | 1       | 0         | 23.15                 | 22.92                 | 23.60                 | 0-1                          | 1        |
|                                      | 1       | 7         | 23.28                 | 22.99                 | 23.69                 |                              | 1        |
|                                      | 1       | 14        | 23.14                 | 22.90                 | 23.57                 |                              | 1        |
|                                      | 8       | 0         | 22.00                 | 21.74                 | 22.39                 | 0-2                          | 2        |
|                                      | 8       | 4         | 22.02                 | 21.77                 | 22.44                 |                              | 2        |
|                                      | 8       | 7         | 22.00                 | 21.75                 | 22.41                 |                              | 2        |
|                                      | 15      | 0         | 21.95                 | 21.69                 | 22.36                 |                              | 2        |
| 64QAM                                | 1       | 0         | 22.09                 | 21.88                 | 22.56                 | 0-2                          | 2        |
|                                      | 1       | 7         | 22.25                 | 21.92                 | 22.65                 |                              | 2        |
|                                      | 1       | 14        | 22.12                 | 21.81                 | 22.52                 |                              | 2        |
|                                      | 8       | 0         | 21.02                 | 20.76                 | 21.23                 | 0-3                          | 3        |
|                                      | 8       | 4         | 21.02                 | 20.77                 | 21.24                 |                              | 3        |
|                                      | 8       | 7         | 21.00                 | 20.73                 | 21.21                 |                              | 3        |
|                                      | 15      | 0         | 20.99                 | 20.71                 | 21.38                 |                              | 3        |

**Table 8-50**  
**LTE Band 25 (PCS) Maximum Conducted Powers -1.4 MHz Bandwidth**

| LTE Band 25 (PCS)<br>1.4 MHz Bandwidth |         |           |                       |                       |                       |                              |          |
|----------------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                             | RB Size | RB Offset | Low Channel           | Mid Channel           | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                        |         |           | 26047<br>(1850.7 MHz) | 26365<br>(1882.5 MHz) | 26683<br>(1914.3 MHz) |                              |          |
|                                        |         |           | Conducted Power [dBm] |                       |                       |                              |          |
| QPSK                                   | 1       | 0         | 23.86                 | 23.60                 | 24.24                 | 0                            | 0        |
|                                        | 1       | 2         | 23.92                 | 23.69                 | 24.29                 |                              | 0        |
|                                        | 1       | 5         | 23.86                 | 23.58                 | 24.26                 |                              | 0        |
|                                        | 3       | 0         | 23.87                 | 23.64                 | 24.28                 |                              | 0        |
|                                        | 3       | 2         | 23.93                 | 23.66                 | 24.31                 |                              | 0        |
|                                        | 3       | 3         | 23.91                 | 23.63                 | 24.32                 |                              | 0        |
|                                        | 6       | 0         | 22.89                 | 22.66                 | 23.30                 | 0-1                          | 1        |
| 16QAM                                  | 1       | 0         | 23.11                 | 22.87                 | 23.54                 | 0-1                          | 1        |
|                                        | 1       | 2         | 23.17                 | 22.89                 | 23.51                 |                              | 1        |
|                                        | 1       | 5         | 23.08                 | 22.83                 | 23.46                 |                              | 1        |
|                                        | 3       | 0         | 22.97                 | 22.70                 | 23.41                 |                              | 1        |
|                                        | 3       | 2         | 23.05                 | 22.80                 | 23.47                 |                              | 1        |
|                                        | 3       | 3         | 23.03                 | 22.74                 | 23.38                 |                              | 1        |
|                                        | 6       | 0         | 21.96                 | 21.72                 | 22.36                 | 0-2                          | 2        |
| 64QAM                                  | 1       | 0         | 22.08                 | 21.80                 | 22.46                 | 0-2                          | 2        |
|                                        | 1       | 2         | 22.12                 | 21.89                 | 22.52                 |                              | 2        |
|                                        | 1       | 5         | 22.05                 | 21.79                 | 22.45                 |                              | 2        |
|                                        | 3       | 0         | 21.97                 | 21.75                 | 22.20                 |                              | 2        |
|                                        | 3       | 2         | 22.01                 | 21.74                 | 22.23                 |                              | 2        |
|                                        | 3       | 3         | 21.97                 | 21.73                 | 22.23                 |                              | 2        |
|                                        | 6       | 0         | 20.92                 | 20.66                 | 21.32                 | 0-3                          | 3        |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | <b>SAR EVALUATION REPORT</b> |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 45 of 100                  |

**Table 8-51**  
**LTE Band 25 (PCS) Reduced Conducted Powers - 20 MHz Bandwidth**

| LTE Band 25 (PCS)<br>20 MHz Bandwidth |         |           |                       |                       |                       |                              |          |
|---------------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                            | RB Size | RB Offset | Low Channel           | Mid Channel           | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                       |         |           | 26140<br>(1860.0 MHz) | 26365<br>(1882.5 MHz) | 26590<br>(1905.0 MHz) |                              |          |
|                                       |         |           | Conducted Power [dBm] |                       |                       |                              |          |
| QPSK                                  | 1       | 0         | 13.11                 | 12.88                 | 13.35                 | 0                            | 0        |
|                                       | 1       | 50        | 12.85                 | 12.65                 | 13.16                 |                              | 0        |
|                                       | 1       | 99        | 12.84                 | 12.65                 | 13.11                 |                              | 0        |
|                                       | 50      | 0         | 13.06                 | 12.80                 | 13.32                 | 0-1                          | 0        |
|                                       | 50      | 25        | 12.94                 | 12.78                 | 13.26                 |                              | 0        |
|                                       | 50      | 50        | 12.87                 | 12.73                 | 13.21                 |                              | 0        |
|                                       | 100     | 0         | 12.98                 | 12.80                 | 13.25                 |                              | 0        |
| 16QAM                                 | 1       | 0         | 13.19                 | 12.98                 | 13.57                 | 0-1                          | 0        |
|                                       | 1       | 50        | 13.04                 | 12.80                 | 13.35                 |                              | 0        |
|                                       | 1       | 99        | 13.02                 | 12.77                 | 13.31                 |                              | 0        |
|                                       | 50      | 0         | 13.04                 | 12.85                 | 13.32                 | 0-2                          | 0        |
|                                       | 50      | 25        | 12.97                 | 12.74                 | 13.26                 |                              | 0        |
|                                       | 50      | 50        | 12.88                 | 12.67                 | 13.21                 |                              | 0        |
|                                       | 100     | 0         | 12.97                 | 12.76                 | 13.28                 |                              | 0        |
| 64QAM                                 | 1       | 0         | 13.18                 | 13.09                 | 13.58                 | 0-2                          | 0        |
|                                       | 1       | 50        | 13.06                 | 12.81                 | 13.36                 |                              | 0        |
|                                       | 1       | 99        | 13.14                 | 12.83                 | 12.62                 |                              | 0        |
|                                       | 50      | 0         | 13.11                 | 12.89                 | 13.35                 | 0-3                          | 0        |
|                                       | 50      | 25        | 12.96                 | 12.80                 | 13.31                 |                              | 0        |
|                                       | 50      | 50        | 12.96                 | 12.69                 | 13.23                 |                              | 0        |
|                                       | 100     | 0         | 12.96                 | 12.78                 | 13.27                 |                              | 0        |

**Table 8-52**  
**LTE Band 25 (PCS) Reduced Conducted Powers - 15 MHz Bandwidth**

| LTE Band 25 (PCS)<br>15 MHz Bandwidth |         |           |                       |                       |                       |                              |          |
|---------------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                            | RB Size | RB Offset | Low Channel           | Mid Channel           | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                       |         |           | 26115<br>(1857.5 MHz) | 26365<br>(1882.5 MHz) | 26615<br>(1907.5 MHz) |                              |          |
|                                       |         |           | Conducted Power [dBm] |                       |                       |                              |          |
| QPSK                                  | 1       | 0         | 13.09                 | 12.86                 | 13.28                 | 0                            | 0        |
|                                       | 1       | 36        | 12.92                 | 12.64                 | 13.18                 |                              | 0        |
|                                       | 1       | 74        | 12.88                 | 12.68                 | 13.13                 |                              | 0        |
|                                       | 36      | 0         | 13.05                 | 12.81                 | 13.29                 | 0-1                          | 0        |
|                                       | 36      | 18        | 13.02                 | 12.76                 | 13.24                 |                              | 0        |
|                                       | 36      | 37        | 12.96                 | 12.74                 | 13.22                 |                              | 0        |
|                                       | 75      | 0         | 13.01                 | 12.79                 | 13.26                 |                              | 0        |
| 16QAM                                 | 1       | 0         | 13.28                 | 13.08                 | 13.55                 | 0-1                          | 0        |
|                                       | 1       | 36        | 13.03                 | 12.84                 | 13.37                 |                              | 0        |
|                                       | 1       | 74        | 13.07                 | 12.81                 | 13.33                 |                              | 0        |
|                                       | 36      | 0         | 13.03                 | 12.81                 | 13.31                 | 0-2                          | 0        |
|                                       | 36      | 18        | 13.00                 | 12.78                 | 13.28                 |                              | 0        |
|                                       | 36      | 37        | 12.96                 | 12.70                 | 13.22                 |                              | 0        |
|                                       | 75      | 0         | 12.96                 | 12.74                 | 13.27                 |                              | 0        |
| 64QAM                                 | 1       | 0         | 13.29                 | 13.04                 | 13.54                 | 0-2                          | 0        |
|                                       | 1       | 36        | 13.15                 | 12.91                 | 13.33                 |                              | 0        |
|                                       | 1       | 74        | 13.12                 | 12.87                 | 13.35                 |                              | 0        |
|                                       | 36      | 0         | 13.04                 | 12.82                 | 13.29                 | 0-3                          | 0        |
|                                       | 36      | 18        | 13.03                 | 12.77                 | 13.30                 |                              | 0        |
|                                       | 36      | 37        | 12.95                 | 12.72                 | 13.21                 |                              | 0        |
|                                       | 75      | 0         | 13.02                 | 12.79                 | 13.24                 |                              | 0        |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | SAR EVALUATION REPORT        |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 46 of 100                  |

**Table 8-53**  
**LTE Band 25 (PCS) Reduced Conducted Powers - 10 MHz Bandwidth**

| LTE Band 25 (PCS)<br>10 MHz Bandwidth |         |           |                       |                       |                       |                              |          |
|---------------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                            | RB Size | RB Offset | Low Channel           | Mid Channel           | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                       |         |           | 26090<br>(1855.0 MHz) | 26365<br>(1882.5 MHz) | 26640<br>(1910.0 MHz) |                              |          |
|                                       |         |           | Conducted Power [dBm] |                       |                       |                              |          |
| QPSK                                  | 1       | 0         | 13.00                 | 12.76                 | 13.31                 | 0                            | 0        |
|                                       | 1       | 25        | 12.90                 | 12.63                 | 13.23                 |                              | 0        |
|                                       | 1       | 49        | 12.89                 | 12.62                 | 13.19                 |                              | 0        |
|                                       | 25      | 0         | 12.99                 | 12.74                 | 13.32                 | 0-1                          | 0        |
|                                       | 25      | 12        | 13.01                 | 12.72                 | 13.32                 |                              | 0        |
|                                       | 25      | 25        | 12.94                 | 12.67                 | 13.27                 |                              | 0        |
|                                       | 50      | 0         | 13.00                 | 12.73                 | 13.30                 |                              | 0        |
| 16QAM                                 | 1       | 0         | 13.18                 | 12.90                 | 13.49                 | 0-1                          | 0        |
|                                       | 1       | 25        | 13.07                 | 12.81                 | 13.34                 |                              | 0        |
|                                       | 1       | 49        | 13.08                 | 12.89                 | 13.42                 |                              | 0        |
|                                       | 25      | 0         | 13.01                 | 12.74                 | 13.28                 | 0-2                          | 0        |
|                                       | 25      | 12        | 12.96                 | 12.75                 | 13.30                 |                              | 0        |
|                                       | 25      | 25        | 12.92                 | 12.71                 | 13.25                 |                              | 0        |
|                                       | 50      | 0         | 12.99                 | 12.74                 | 13.31                 |                              | 0        |
| 64QAM                                 | 1       | 0         | 13.19                 | 12.93                 | 13.45                 | 0-2                          | 0        |
|                                       | 1       | 25        | 13.11                 | 12.78                 | 13.42                 |                              | 0        |
|                                       | 1       | 49        | 13.06                 | 12.80                 | 13.41                 |                              | 0        |
|                                       | 25      | 0         | 13.01                 | 12.82                 | 13.34                 | 0-3                          | 0        |
|                                       | 25      | 12        | 13.03                 | 12.75                 | 13.34                 |                              | 0        |
|                                       | 25      | 25        | 13.00                 | 12.74                 | 13.28                 |                              | 0        |
|                                       | 50      | 0         | 13.02                 | 12.77                 | 13.34                 |                              | 0        |

**Table 8-54**  
**LTE Band 25 (PCS) Reduced Conducted Powers - 5 MHz Bandwidth**

| LTE Band 25 (PCS)<br>5 MHz Bandwidth |         |           |                       |                       |                       |                              |          |
|--------------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                           | RB Size | RB Offset | Low Channel           | Mid Channel           | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                      |         |           | 26065<br>(1852.5 MHz) | 26365<br>(1882.5 MHz) | 26665<br>(1912.5 MHz) |                              |          |
|                                      |         |           | Conducted Power [dBm] |                       |                       |                              |          |
| QPSK                                 | 1       | 0         | 12.94                 | 12.72                 | 13.26                 | 0                            | 0        |
|                                      | 1       | 12        | 12.91                 | 12.68                 | 13.18                 |                              | 0        |
|                                      | 1       | 24        | 12.91                 | 12.66                 | 13.14                 |                              | 0        |
|                                      | 12      | 0         | 12.99                 | 12.71                 | 13.30                 | 0-1                          | 0        |
|                                      | 12      | 6         | 12.98                 | 12.74                 | 13.28                 |                              | 0        |
|                                      | 12      | 13        | 12.95                 | 12.70                 | 13.25                 |                              | 0        |
|                                      | 25      | 0         | 12.99                 | 12.69                 | 13.25                 |                              | 0        |
| 16QAM                                | 1       | 0         | 13.17                 | 12.83                 | 13.48                 | 0-1                          | 0        |
|                                      | 1       | 12        | 13.08                 | 12.80                 | 13.36                 |                              | 0        |
|                                      | 1       | 24        | 13.08                 | 12.82                 | 13.41                 |                              | 0        |
|                                      | 12      | 0         | 13.06                 | 12.77                 | 13.27                 | 0-2                          | 0        |
|                                      | 12      | 6         | 12.99                 | 12.74                 | 13.31                 |                              | 0        |
|                                      | 12      | 13        | 12.97                 | 12.74                 | 13.27                 |                              | 0        |
|                                      | 25      | 0         | 12.98                 | 12.68                 | 13.24                 |                              | 0        |
| 64QAM                                | 1       | 0         | 13.16                 | 12.92                 | 13.43                 | 0-2                          | 0        |
|                                      | 1       | 12        | 13.12                 | 12.85                 | 13.37                 |                              | 0        |
|                                      | 1       | 24        | 13.13                 | 12.84                 | 13.35                 |                              | 0        |
|                                      | 12      | 0         | 13.02                 | 12.77                 | 13.24                 | 0-3                          | 0        |
|                                      | 12      | 6         | 13.02                 | 12.76                 | 13.21                 |                              | 0        |
|                                      | 12      | 13        | 12.99                 | 12.76                 | 13.23                 |                              | 0        |
|                                      | 25      | 0         | 13.00                 | 12.73                 | 13.30                 |                              | 0        |

FCC ID: A3LSMT837P



**SAR EVALUATION REPORT**



**Approved by:**  
Quality Manager

Document S/N:

1M1806060119-01.A3L

Test Dates:

06/11/18 - 06/26/18

DUT Type:

Portable Tablet

Page 47 of 100



**Table 8-55**  
**LTE Band 25 (PCS) Reduced Conducted Powers - 3 MHz Bandwidth**

| LTE Band 25 (PCS)<br>3 MHz Bandwidth |         |           |                       |                       |                       |                              |          |
|--------------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                           | RB Size | RB Offset | Low Channel           | Mid Channel           | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                      |         |           | 26055<br>(1851.5 MHz) | 26365<br>(1882.5 MHz) | 26675<br>(1913.5 MHz) |                              |          |
|                                      |         |           | Conducted Power [dBm] |                       |                       |                              |          |
| QPSK                                 | 1       | 0         | 12.94                 | 12.66                 | 13.31                 | 0                            | 0        |
|                                      | 1       | 7         | 13.02                 | 12.73                 | 13.41                 |                              | 0        |
|                                      | 1       | 14        | 12.92                 | 12.62                 | 13.24                 |                              | 0        |
|                                      | 8       | 0         | 12.96                 | 12.69                 | 13.33                 | 0-1                          | 0        |
|                                      | 8       | 4         | 12.97                 | 12.73                 | 13.33                 |                              | 0        |
|                                      | 8       | 7         | 12.96                 | 12.67                 | 13.33                 |                              | 0        |
|                                      | 15      | 0         | 12.98                 | 12.72                 | 13.19                 |                              | 0        |
| 16QAM                                | 1       | 0         | 13.08                 | 12.94                 | 13.46                 | 0-1                          | 0        |
|                                      | 1       | 7         | 13.16                 | 12.91                 | 13.49                 |                              | 0        |
|                                      | 1       | 14        | 13.14                 | 12.80                 | 13.48                 |                              | 0        |
|                                      | 8       | 0         | 13.02                 | 12.73                 | 13.38                 | 0-2                          | 0        |
|                                      | 8       | 4         | 13.02                 | 12.75                 | 13.42                 |                              | 0        |
|                                      | 8       | 7         | 12.99                 | 12.74                 | 13.36                 |                              | 0        |
|                                      | 15      | 0         | 12.93                 | 12.68                 | 13.34                 |                              | 0        |
| 64QAM                                | 1       | 0         | 13.03                 | 12.79                 | 13.46                 | 0-2                          | 0        |
|                                      | 1       | 7         | 13.15                 | 12.89                 | 13.57                 |                              | 0        |
|                                      | 1       | 14        | 13.04                 | 12.83                 | 13.42                 |                              | 0        |
|                                      | 8       | 0         | 12.98                 | 12.73                 | 13.20                 | 0-3                          | 0        |
|                                      | 8       | 4         | 12.99                 | 12.72                 | 13.18                 |                              | 0        |
|                                      | 8       | 7         | 13.02                 | 12.73                 | 13.19                 |                              | 0        |
|                                      | 15      | 0         | 12.96                 | 12.74                 | 13.34                 |                              | 0        |

**Table 8-56**  
**LTE Band 25 (PCS) Reduced Conducted Powers -1.4 MHz Bandwidth**

| LTE Band 25 (PCS)<br>1.4 MHz Bandwidth |         |           |                       |                       |                       |                              |          |
|----------------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                             | RB Size | RB Offset | Low Channel           | Mid Channel           | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                        |         |           | 26047<br>(1850.7 MHz) | 26365<br>(1882.5 MHz) | 26683<br>(1914.3 MHz) |                              |          |
|                                        |         |           | Conducted Power [dBm] |                       |                       |                              |          |
| QPSK                                   | 1       | 0         | 12.83                 | 12.60                 | 13.21                 | 0                            | 0        |
|                                        | 1       | 2         | 12.87                 | 12.65                 | 13.24                 |                              | 0        |
|                                        | 1       | 5         | 12.82                 | 12.55                 | 13.19                 |                              | 0        |
|                                        | 3       | 0         | 12.88                 | 12.62                 | 13.24                 |                              | 0        |
|                                        | 3       | 2         | 12.91                 | 12.62                 | 13.27                 |                              | 0        |
|                                        | 3       | 3         | 12.87                 | 12.58                 | 13.24                 |                              | 0        |
|                                        | 6       | 0         | 12.87                 | 12.60                 | 13.26                 | 0-1                          | 0        |
| 16QAM                                  | 1       | 0         | 13.01                 | 12.70                 | 13.48                 | 0-1                          | 0        |
|                                        | 1       | 2         | 13.07                 | 12.89                 | 13.52                 |                              | 0        |
|                                        | 1       | 5         | 13.00                 | 12.73                 | 13.40                 |                              | 0        |
|                                        | 3       | 0         | 13.00                 | 12.74                 | 13.38                 |                              | 0        |
|                                        | 3       | 2         | 13.03                 | 12.75                 | 13.48                 |                              | 0        |
|                                        | 3       | 3         | 12.97                 | 12.75                 | 13.35                 |                              | 0        |
|                                        | 6       | 0         | 12.89                 | 12.65                 | 13.35                 | 0-2                          | 0        |
| 64QAM                                  | 1       | 0         | 12.98                 | 12.82                 | 13.35                 | 0-2                          | 0        |
|                                        | 1       | 2         | 13.04                 | 12.82                 | 13.47                 |                              | 0        |
|                                        | 1       | 5         | 12.97                 | 12.76                 | 13.40                 |                              | 0        |
|                                        | 3       | 0         | 12.92                 | 12.73                 | 13.12                 |                              | 0        |
|                                        | 3       | 2         | 12.94                 | 12.71                 | 13.17                 |                              | 0        |
|                                        | 3       | 3         | 12.93                 | 12.69                 | 13.14                 |                              | 0        |
|                                        | 6       | 0         | 12.91                 | 12.61                 | 13.26                 | 0-3                          | 0        |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | <b>SAR EVALUATION REPORT</b> |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 48 of 100                  |

## 8.2.7

## LTE Band 7

**Table 8-57**  
**LTE Band 7 Maximum Conducted Powers - 20 MHz Bandwidth**

| LTE Band 7<br>20 MHz Bandwidth |         |           |                       |                       |                       |                              |          |
|--------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                     | RB Size | RB Offset | Low Channel           | Mid Channel           | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                |         |           | 20850<br>(2510.0 MHz) | 21100<br>(2535.0 MHz) | 21350<br>(2560.0 MHz) |                              |          |
|                                |         |           | Conducted Power [dBm] |                       |                       |                              |          |
| QPSK                           | 1       | 0         | 24.56                 | 24.63                 | 24.41                 | 0                            | 0        |
|                                | 1       | 50        | 24.27                 | 24.39                 | 24.19                 |                              | 0        |
|                                | 1       | 99        | 24.11                 | 24.16                 | 24.05                 |                              | 0        |
|                                | 50      | 0         | 23.48                 | 23.58                 | 23.34                 | 0-1                          | 1        |
|                                | 50      | 25        | 23.37                 | 23.45                 | 23.29                 |                              | 1        |
|                                | 50      | 50        | 23.23                 | 23.40                 | 23.21                 |                              | 1        |
| 16QAM                          | 100     | 0         | 23.35                 | 23.47                 | 23.26                 | 0-1                          | 1        |
|                                | 1       | 0         | 23.76                 | 23.85                 | 23.59                 |                              | 1        |
|                                | 1       | 50        | 23.55                 | 23.54                 | 23.48                 |                              | 1        |
|                                | 1       | 99        | 23.36                 | 23.62                 | 23.27                 | 0-2                          | 1        |
|                                | 50      | 0         | 22.46                 | 22.56                 | 22.36                 |                              | 2        |
|                                | 50      | 25        | 22.34                 | 22.51                 | 22.27                 |                              | 2        |
|                                | 50      | 50        | 22.24                 | 22.39                 | 22.21                 |                              | 2        |
| 64QAM                          | 100     | 0         | 22.36                 | 22.50                 | 22.26                 | 0-2                          | 2        |
|                                | 1       | 0         | 22.54                 | 22.67                 | 22.36                 |                              | 2        |
|                                | 1       | 50        | 22.33                 | 22.42                 | 22.15                 |                              | 2        |
|                                | 1       | 99        | 22.07                 | 22.28                 | 22.01                 | 0-3                          | 2        |
|                                | 50      | 0         | 21.35                 | 21.42                 | 21.22                 |                              | 3        |
|                                | 50      | 25        | 21.27                 | 21.35                 | 21.01                 |                              | 3        |
|                                | 50      | 50        | 21.12                 | 21.29                 | 21.02                 |                              | 3        |
| 100                            | 0       | 21.22     | 21.34                 | 21.09                 |                       |                              |          |

**Table 8-58**  
**LTE Band 7 Maximum Conducted Powers - 15 MHz Bandwidth**

| LTE Band 7<br>15 MHz Bandwidth |         |           |                       |                       |                       |                              |          |
|--------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                     | RB Size | RB Offset | Low Channel           | Mid Channel           | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                |         |           | 20825<br>(2507.5 MHz) | 21100<br>(2535.0 MHz) | 21375<br>(2562.5 MHz) |                              |          |
|                                |         |           | Conducted Power [dBm] |                       |                       |                              |          |
| QPSK                           | 1       | 0         | 24.35                 | 24.53                 | 24.45                 | 0                            | 0        |
|                                | 1       | 36        | 24.16                 | 24.43                 | 24.28                 |                              | 0        |
|                                | 1       | 74        | 24.11                 | 24.42                 | 24.24                 |                              | 0        |
|                                | 36      | 0         | 23.30                 | 23.53                 | 23.42                 | 0-1                          | 1        |
|                                | 36      | 18        | 23.28                 | 23.52                 | 23.38                 |                              | 1        |
|                                | 36      | 37        | 23.17                 | 23.47                 | 23.31                 |                              | 1        |
|                                | 75      | 0         | 23.25                 | 23.51                 | 23.35                 |                              | 1        |
| 16QAM                          | 1       | 0         | 23.53                 | 23.74                 | 23.63                 | 0-1                          | 1        |
|                                | 1       | 36        | 23.40                 | 23.62                 | 23.54                 |                              | 1        |
|                                | 1       | 74        | 23.37                 | 23.63                 | 23.45                 |                              | 1        |
|                                | 36      | 0         | 22.32                 | 22.51                 | 22.43                 | 0-2                          | 2        |
|                                | 36      | 18        | 22.31                 | 22.52                 | 22.42                 |                              | 2        |
|                                | 36      | 37        | 22.26                 | 22.49                 | 22.34                 |                              | 2        |
|                                | 75      | 0         | 22.25                 | 22.49                 | 22.38                 |                              | 2        |
| 64QAM                          | 1       | 0         | 22.54                 | 22.74                 | 22.68                 | 0-2                          | 2        |
|                                | 1       | 36        | 22.40                 | 22.64                 | 22.50                 |                              | 2        |
|                                | 1       | 74        | 22.30                 | 22.67                 | 22.41                 |                              | 2        |
|                                | 36      | 0         | 21.31                 | 21.50                 | 21.45                 | 0-3                          | 3        |
|                                | 36      | 18        | 21.30                 | 21.54                 | 21.41                 |                              | 3        |
|                                | 36      | 37        | 21.24                 | 21.48                 | 21.31                 |                              | 3        |
|                                | 75      | 0         | 21.26                 | 21.50                 | 21.40                 |                              | 3        |

FCC ID: A3LSMT837P



SAR EVALUATION REPORT



Approved by:  
Quality Manager

Document S/N:

1M1806060119-01.A3L

Test Dates:

06/11/18 - 06/26/18

DUT Type:

Portable Tablet

Page 49 of 100

**Table 8-59**  
**LTE Band 7 Maximum Conducted Powers - 10 MHz Bandwidth**

| LTE Band 7<br>10 MHz Bandwidth |         |           |                       |                       |                       |                              |          |
|--------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                     | RB Size | RB Offset | Low Channel           | Mid Channel           | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                |         |           | 20800<br>(2505.0 MHz) | 21100<br>(2535.0 MHz) | 21400<br>(2565.0 MHz) |                              |          |
|                                |         |           | Conducted Power [dBm] |                       |                       |                              |          |
| QPSK                           | 1       | 0         | 24.31                 | 24.49                 | 24.41                 | 0                            | 0        |
|                                | 1       | 25        | 24.22                 | 24.48                 | 24.33                 |                              | 0        |
|                                | 1       | 49        | 24.15                 | 24.44                 | 24.22                 |                              | 0        |
|                                | 25      | 0         | 23.31                 | 23.48                 | 23.37                 | 0-1                          | 1        |
|                                | 25      | 12        | 23.29                 | 23.49                 | 23.39                 |                              | 1        |
|                                | 25      | 25        | 23.21                 | 23.47                 | 23.26                 |                              | 1        |
|                                | 50      | 0         | 23.26                 | 23.46                 | 23.33                 |                              | 1        |
| 16QAM                          | 1       | 0         | 23.51                 | 23.66                 | 23.57                 | 0-1                          | 1        |
|                                | 1       | 25        | 23.40                 | 23.64                 | 23.50                 |                              | 1        |
|                                | 1       | 49        | 23.38                 | 23.60                 | 23.44                 |                              | 1        |
|                                | 25      | 0         | 22.29                 | 22.46                 | 22.37                 | 0-2                          | 2        |
|                                | 25      | 12        | 22.28                 | 22.48                 | 22.35                 |                              | 2        |
|                                | 25      | 25        | 22.20                 | 22.46                 | 22.29                 |                              | 2        |
|                                | 50      | 0         | 22.26                 | 22.47                 | 22.35                 |                              | 2        |
| 64QAM                          | 1       | 0         | 22.45                 | 22.62                 | 22.57                 | 0-2                          | 2        |
|                                | 1       | 25        | 22.38                 | 22.61                 | 22.44                 |                              | 2        |
|                                | 1       | 49        | 22.33                 | 22.64                 | 22.40                 |                              | 2        |
|                                | 25      | 0         | 21.34                 | 21.49                 | 21.41                 | 0-3                          | 3        |
|                                | 25      | 12        | 21.31                 | 21.54                 | 21.40                 |                              | 3        |
|                                | 25      | 25        | 21.22                 | 21.47                 | 21.30                 |                              | 3        |
|                                | 50      | 0         | 21.28                 | 21.52                 | 21.37                 |                              | 3        |

**Table 8-60**  
**LTE Band 7 Maximum Conducted Powers - 5 MHz Bandwidth**

| LTE Band 7<br>5 MHz Bandwidth |         |           |                       |                       |                       |                              |          |
|-------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                    | RB Size | RB Offset | Low Channel           | Mid Channel           | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                               |         |           | 20775<br>(2502.5 MHz) | 21100<br>(2535.0 MHz) | 21425<br>(2567.5 MHz) |                              |          |
|                               |         |           | Conducted Power [dBm] |                       |                       |                              |          |
| QPSK                          | 1       | 0         | 24.26                 | 24.42                 | 24.30                 | 0                            | 0        |
|                               | 1       | 12        | 24.21                 | 24.41                 | 24.25                 |                              | 0        |
|                               | 1       | 24        | 24.16                 | 24.40                 | 24.18                 |                              | 0        |
|                               | 12      | 0         | 23.27                 | 23.44                 | 23.33                 | 0-1                          | 1        |
|                               | 12      | 6         | 23.26                 | 23.47                 | 23.35                 |                              | 1        |
|                               | 12      | 13        | 23.23                 | 23.43                 | 23.26                 |                              | 1        |
|                               | 25      | 0         | 23.25                 | 23.45                 | 23.29                 |                              | 1        |
| 16QAM                         | 1       | 0         | 23.49                 | 23.57                 | 23.48                 | 0-1                          | 1        |
|                               | 1       | 12        | 23.39                 | 23.63                 | 23.49                 |                              | 1        |
|                               | 1       | 24        | 23.36                 | 23.58                 | 23.37                 |                              | 1        |
|                               | 12      | 0         | 22.31                 | 22.48                 | 22.34                 | 0-2                          | 2        |
|                               | 12      | 6         | 22.33                 | 22.52                 | 22.33                 |                              | 2        |
|                               | 12      | 13        | 22.24                 | 22.48                 | 22.32                 |                              | 2        |
|                               | 25      | 0         | 22.28                 | 22.43                 | 22.29                 |                              | 2        |
| 64QAM                         | 1       | 0         | 22.40                 | 22.58                 | 22.48                 | 0-2                          | 2        |
|                               | 1       | 12        | 22.42                 | 22.63                 | 22.45                 |                              | 2        |
|                               | 1       | 24        | 22.34                 | 22.55                 | 22.36                 |                              | 2        |
|                               | 12      | 0         | 21.32                 | 21.48                 | 21.37                 | 0-3                          | 3        |
|                               | 12      | 6         | 21.34                 | 21.53                 | 21.34                 |                              | 3        |
|                               | 12      | 13        | 21.27                 | 21.46                 | 21.32                 |                              | 3        |
|                               | 25      | 0         | 21.27                 | 21.49                 | 21.32                 |                              | 3        |

FCC ID: A3LSMT837P



**SAR EVALUATION REPORT**



**Approved by:**  
Quality Manager

Document S/N:

1M1806060119-01.A3L

Test Dates:

06/11/18 - 06/26/18

DUT Type:

Portable Tablet

Page 50 of 100

**Table 8-61**  
**LTE Band 7 Reduced Conducted Powers - 20 MHz Bandwidth**

| LTE Band 7<br>20 MHz Bandwidth |         |           |                       |                       |                       |                              |          |
|--------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                     | RB Size | RB Offset | Low Channel           | Mid Channel           | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                |         |           | 20850<br>(2510.0 MHz) | 21100<br>(2535.0 MHz) | 21350<br>(2560.0 MHz) |                              |          |
|                                |         |           | Conducted Power [dBm] |                       |                       |                              |          |
| QPSK                           | 1       | 0         | 12.40                 | 12.48                 | 12.25                 | 0                            | 0        |
|                                | 1       | 50        | 12.14                 | 12.21                 | 12.07                 |                              | 0        |
|                                | 1       | 99        | 11.98                 | 12.15                 | 11.85                 |                              | 0        |
|                                | 50      | 0         | 12.30                 | 12.39                 | 12.16                 | 0-1                          | 0        |
|                                | 50      | 25        | 12.23                 | 12.32                 | 12.04                 |                              | 0        |
|                                | 50      | 50        | 12.08                 | 12.24                 | 11.97                 |                              | 0        |
|                                | 100     | 0         | 12.19                 | 12.35                 | 12.06                 |                              | 0        |
| 16QAM                          | 1       | 0         | 12.59                 | 12.69                 | 12.39                 | 0-1                          | 0        |
|                                | 1       | 50        | 12.48                 | 12.49                 | 12.20                 |                              | 0        |
|                                | 1       | 99        | 12.21                 | 12.37                 | 12.05                 |                              | 0        |
|                                | 50      | 0         | 12.28                 | 12.43                 | 12.08                 | 0-2                          | 0        |
|                                | 50      | 25        | 12.22                 | 12.38                 | 12.06                 |                              | 0        |
|                                | 50      | 50        | 12.10                 | 12.27                 | 11.99                 |                              | 0        |
|                                | 100     | 0         | 12.20                 | 12.31                 | 12.05                 |                              | 0        |
| 64QAM                          | 1       | 0         | 12.37                 | 12.70                 | 12.28                 | 0-2                          | 0        |
|                                | 1       | 50        | 12.51                 | 12.43                 | 12.11                 |                              | 0        |
|                                | 1       | 99        | 12.11                 | 12.25                 | 12.01                 |                              | 0        |
|                                | 50      | 0         | 12.29                 | 12.44                 | 12.11                 | 0-3                          | 0        |
|                                | 50      | 25        | 12.23                 | 12.38                 | 12.07                 |                              | 0        |
|                                | 50      | 50        | 12.14                 | 12.31                 | 12.03                 |                              | 0        |
|                                | 100     | 0         | 12.20                 | 12.38                 | 12.05                 |                              | 0        |

**Table 8-62**  
**LTE Band 7 Reduced Conducted Powers - 15 MHz Bandwidth**

| LTE Band 7<br>15 MHz Bandwidth |         |           |                       |                       |                       |                              |          |
|--------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                     | RB Size | RB Offset | Low Channel           | Mid Channel           | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                |         |           | 20825<br>(2507.5 MHz) | 21100<br>(2535.0 MHz) | 21375<br>(2562.5 MHz) |                              |          |
|                                |         |           | Conducted Power [dBm] |                       |                       |                              |          |
| QPSK                           | 1       | 0         | 12.23                 | 12.41                 | 12.32                 | 0                            | 0        |
|                                | 1       | 36        | 12.06                 | 12.29                 | 12.20                 |                              | 0        |
|                                | 1       | 74        | 12.01                 | 12.27                 | 12.10                 |                              | 0        |
|                                | 36      | 0         | 12.17                 | 12.40                 | 12.28                 | 0-1                          | 0        |
|                                | 36      | 18        | 12.17                 | 12.41                 | 12.25                 |                              | 0        |
|                                | 36      | 37        | 12.09                 | 12.38                 | 12.19                 |                              | 0        |
|                                | 75      | 0         | 12.15                 | 12.42                 | 12.25                 |                              | 0        |
| 16QAM                          | 1       | 0         | 12.46                 | 12.59                 | 12.52                 | 0-1                          | 0        |
|                                | 1       | 36        | 12.18                 | 12.51                 | 12.40                 |                              | 0        |
|                                | 1       | 74        | 12.16                 | 12.58                 | 12.29                 |                              | 0        |
|                                | 36      | 0         | 12.19                 | 12.42                 | 12.30                 | 0-2                          | 0        |
|                                | 36      | 18        | 12.16                 | 12.42                 | 12.29                 |                              | 0        |
|                                | 36      | 37        | 12.11                 | 12.40                 | 12.18                 |                              | 0        |
|                                | 75      | 0         | 12.16                 | 12.42                 | 12.29                 |                              | 0        |
| 64QAM                          | 1       | 0         | 12.44                 | 12.57                 | 12.48                 | 0-2                          | 0        |
|                                | 1       | 36        | 12.27                 | 12.52                 | 12.39                 |                              | 0        |
|                                | 1       | 74        | 12.18                 | 12.48                 | 12.26                 |                              | 0        |
|                                | 36      | 0         | 12.21                 | 12.42                 | 12.31                 | 0-3                          | 0        |
|                                | 36      | 18        | 12.18                 | 12.44                 | 12.28                 |                              | 0        |
|                                | 36      | 37        | 12.11                 | 12.38                 | 12.23                 |                              | 0        |
|                                | 75      | 0         | 12.16                 | 12.40                 | 12.23                 |                              | 0        |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | <b>SAR EVALUATION REPORT</b> |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 51 of 100                  |

**Table 8-63**  
**LTE Band 7 Reduced Conducted Powers - 10 MHz Bandwidth**

| LTE Band 7<br>10 MHz Bandwidth |         |           |                       |                       |                       |                              |          |
|--------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                     | RB Size | RB Offset | Low Channel           | Mid Channel           | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                |         |           | 20800<br>(2505.0 MHz) | 21100<br>(2535.0 MHz) | 21400<br>(2565.0 MHz) |                              |          |
|                                |         |           | Conducted Power [dBm] |                       |                       |                              |          |
| QPSK                           | 1       | 0         | 12.21                 | 12.38                 | 12.28                 | 0                            | 0        |
|                                | 1       | 25        | 12.07                 | 12.31                 | 12.16                 |                              | 0        |
|                                | 1       | 49        | 12.03                 | 12.29                 | 12.09                 |                              | 0        |
|                                | 25      | 0         | 12.22                 | 12.43                 | 12.28                 | 0-1                          | 0        |
|                                | 25      | 12        | 12.20                 | 12.41                 | 12.23                 |                              | 0        |
|                                | 25      | 25        | 12.09                 | 12.35                 | 12.16                 |                              | 0        |
|                                | 50      | 0         | 12.12                 | 12.39                 | 12.23                 |                              | 0        |
| 16QAM                          | 1       | 0         | 12.36                 | 12.54                 | 12.50                 | 0-1                          | 0        |
|                                | 1       | 25        | 12.23                 | 12.58                 | 12.38                 |                              | 0        |
|                                | 1       | 49        | 12.24                 | 12.56                 | 12.28                 |                              | 0        |
|                                | 25      | 0         | 12.18                 | 12.40                 | 12.24                 | 0-2                          | 0        |
|                                | 25      | 12        | 12.18                 | 12.40                 | 12.25                 |                              | 0        |
|                                | 25      | 25        | 12.08                 | 12.37                 | 12.14                 |                              | 0        |
|                                | 50      | 0         | 12.15                 | 12.40                 | 12.23                 |                              | 0        |
| 64QAM                          | 1       | 0         | 12.31                 | 12.54                 | 12.46                 | 0-2                          | 0        |
|                                | 1       | 25        | 12.23                 | 12.48                 | 12.38                 |                              | 0        |
|                                | 1       | 49        | 12.22                 | 12.49                 | 12.31                 |                              | 0        |
|                                | 25      | 0         | 12.21                 | 12.40                 | 12.26                 | 0-3                          | 0        |
|                                | 25      | 12        | 12.20                 | 12.41                 | 12.29                 |                              | 0        |
|                                | 25      | 25        | 12.11                 | 12.39                 | 12.21                 |                              | 0        |
|                                | 50      | 0         | 12.16                 | 12.42                 | 12.24                 |                              | 0        |

**Table 8-64**  
**LTE Band 7 Reduced Conducted Powers - 5 MHz Bandwidth**

| LTE Band 7<br>5 MHz Bandwidth |         |           |                       |                       |                       |                              |          |
|-------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                    | RB Size | RB Offset | Low Channel           | Mid Channel           | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                               |         |           | 20775<br>(2502.5 MHz) | 21100<br>(2535.0 MHz) | 21425<br>(2567.5 MHz) |                              |          |
|                               |         |           | Conducted Power [dBm] |                       |                       |                              |          |
| QPSK                          | 1       | 0         | 12.16                 | 12.33                 | 12.18                 | 0                            | 0        |
|                               | 1       | 12        | 12.12                 | 12.31                 | 12.15                 |                              | 0        |
|                               | 1       | 24        | 12.05                 | 12.30                 | 12.11                 |                              | 0        |
|                               | 12      | 0         | 12.17                 | 12.37                 | 12.23                 | 0-1                          | 0        |
|                               | 12      | 6         | 12.22                 | 12.43                 | 12.23                 |                              | 0        |
|                               | 12      | 13        | 12.15                 | 12.39                 | 12.18                 |                              | 0        |
|                               | 25      | 0         | 12.19                 | 12.38                 | 12.18                 |                              | 0        |
| 16QAM                         | 1       | 0         | 12.39                 | 12.52                 | 12.37                 | 0-1                          | 0        |
|                               | 1       | 12        | 12.32                 | 12.53                 | 12.35                 |                              | 0        |
|                               | 1       | 24        | 12.30                 | 12.52                 | 12.34                 |                              | 0        |
|                               | 12      | 0         | 12.21                 | 12.44                 | 12.24                 | 0-2                          | 0        |
|                               | 12      | 6         | 12.23                 | 12.48                 | 12.26                 |                              | 0        |
|                               | 12      | 13        | 12.19                 | 12.42                 | 12.23                 |                              | 0        |
|                               | 25      | 0         | 12.17                 | 12.38                 | 12.19                 |                              | 0        |
| 64QAM                         | 1       | 0         | 12.32                 | 12.49                 | 12.36                 | 0-2                          | 0        |
|                               | 1       | 12        | 12.23                 | 12.47                 | 12.31                 |                              | 0        |
|                               | 1       | 24        | 12.22                 | 12.48                 | 12.28                 |                              | 0        |
|                               | 12      | 0         | 12.21                 | 12.41                 | 12.27                 | 0-3                          | 0        |
|                               | 12      | 6         | 12.20                 | 12.44                 | 12.26                 |                              | 0        |
|                               | 12      | 13        | 12.17                 | 12.38                 | 12.20                 |                              | 0        |
|                               | 25      | 0         | 12.16                 | 12.38                 | 12.22                 |                              | 0        |

|                                             |                                                                                     |                                     |                                                                                       |                                        |
|---------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> A3LSMT837P                   |  | <b>SAR EVALUATION REPORT</b>        |  | <b>Approved by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>1M1806060119-01.A3L | <b>Test Dates:</b><br>06/11/18 - 06/26/18                                           | <b>DUT Type:</b><br>Portable Tablet |                                                                                       | Page 52 of 100                         |

## 8.2.8

## LTE Band 41

**Table 8-65**  
**LTE Band 41 PC3 Maximum Conducted Powers - 20 MHz Bandwidth**

| LTE Band 41<br>20 MHz Bandwidth |         |           |                       |                       |                       |                       |                       |                              |          |
|---------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                      | RB Size | RB Offset | Low Channel           | Low-Mid Channel       | Mid Channel           | Mid-High Channel      | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                 |         |           | 39750<br>(2506.0 MHz) | 40185<br>(2549.5 MHz) | 40620<br>(2593.0 MHz) | 41055<br>(2636.5 MHz) | 41490<br>(2680.0 MHz) |                              |          |
|                                 |         |           | Conducted Power [dBm] |                       |                       |                       |                       |                              |          |
| QPSK                            | 1       | 0         | 24.26                 | 24.52                 | 24.93                 | 24.73                 | 24.24                 | 0                            | 0        |
|                                 | 1       | 50        | 23.97                 | 24.33                 | 24.65                 | 24.47                 | 23.93                 |                              | 0        |
|                                 | 1       | 99        | 23.84                 | 24.32                 | 24.56                 | 24.38                 | 23.83                 |                              | 0        |
|                                 | 50      | 0         | 23.14                 | 23.46                 | 23.87                 | 23.64                 | 23.09                 | 0-1                          | 1        |
|                                 | 50      | 25        | 23.08                 | 23.41                 | 23.78                 | 23.58                 | 23.02                 |                              | 1        |
|                                 | 50      | 50        | 22.97                 | 23.37                 | 23.70                 | 23.48                 | 22.92                 |                              | 1        |
|                                 | 100     | 0         | 23.05                 | 23.40                 | 23.81                 | 23.58                 | 23.01                 |                              | 1        |
| 16QAM                           | 1       | 0         | 23.35                 | 23.59                 | 23.99                 | 23.81                 | 23.30                 | 0-1                          | 1        |
|                                 | 1       | 50        | 23.06                 | 23.43                 | 23.75                 | 23.57                 | 23.03                 |                              | 1        |
|                                 | 1       | 99        | 22.94                 | 23.41                 | 23.68                 | 23.50                 | 22.95                 |                              | 1        |
|                                 | 50      | 0         | 22.19                 | 22.49                 | 22.89                 | 22.71                 | 22.14                 | 0-2                          | 2        |
|                                 | 50      | 25        | 22.07                 | 22.44                 | 22.79                 | 22.65                 | 22.06                 |                              | 2        |
|                                 | 50      | 50        | 21.99                 | 22.41                 | 22.71                 | 22.55                 | 21.94                 |                              | 2        |
|                                 | 100     | 0         | 22.14                 | 22.51                 | 22.86                 | 22.69                 | 22.10                 |                              | 2        |
| 64QAM                           | 1       | 0         | 22.55                 | 22.90                 | 22.80                 | 22.58                 | 22.56                 | 0-2                          | 2        |
|                                 | 1       | 50        | 22.34                 | 22.67                 | 22.62                 | 22.34                 | 22.36                 |                              | 2        |
|                                 | 1       | 99        | 22.15                 | 22.56                 | 22.51                 | 22.14                 | 22.26                 |                              | 2        |
|                                 | 50      | 0         | 21.57                 | 21.90                 | 21.84                 | 21.56                 | 21.57                 | 0-3                          | 3        |
|                                 | 50      | 25        | 21.51                 | 21.82                 | 21.78                 | 21.50                 | 21.52                 |                              | 3        |
|                                 | 50      | 50        | 21.44                 | 21.72                 | 21.67                 | 21.37                 | 21.43                 |                              | 3        |
|                                 | 100     | 0         | 21.46                 | 21.81                 | 21.76                 | 21.45                 | 21.50                 |                              | 3        |

**Table 8-66**  
**LTE Band 41 PC3 Maximum Conducted Powers - 15 MHz Bandwidth**

| LTE Band 41<br>15 MHz Bandwidth |         |           |                       |                       |                       |                       |                       |                              |          |
|---------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                      | RB Size | RB Offset | Low Channel           | Low-Mid Channel       | Mid Channel           | Mid-High Channel      | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                 |         |           | 39750<br>(2506.0 MHz) | 40185<br>(2549.5 MHz) | 40620<br>(2593.0 MHz) | 41055<br>(2636.5 MHz) | 41490<br>(2680.0 MHz) |                              |          |
|                                 |         |           | Conducted Power [dBm] |                       |                       |                       |                       |                              |          |
| QPSK                            | 1       | 0         | 24.38                 | 24.58                 | 24.98                 | 24.73                 | 24.34                 | 0                            | 0        |
|                                 | 1       | 36        | 24.21                 | 24.39                 | 24.80                 | 24.50                 | 24.10                 |                              | 0        |
|                                 | 1       | 74        | 24.13                 | 24.30                 | 24.73                 | 24.40                 | 24.00                 |                              | 0        |
|                                 | 36      | 0         | 23.13                 | 23.51                 | 23.96                 | 23.65                 | 23.23                 | 0-1                          | 1        |
|                                 | 36      | 18        | 23.25                 | 23.44                 | 23.91                 | 23.59                 | 23.15                 |                              | 1        |
|                                 | 36      | 37        | 23.20                 | 23.41                 | 23.87                 | 23.52                 | 23.07                 |                              | 1        |
|                                 | 75      | 0         | 23.21                 | 23.45                 | 23.91                 | 23.60                 | 23.17                 |                              | 1        |
| 16QAM                           | 1       | 0         | 23.45                 | 23.68                 | 24.00                 | 23.85                 | 23.45                 | 0-1                          | 1        |
|                                 | 1       | 36        | 23.27                 | 23.48                 | 23.89                 | 23.61                 | 23.20                 |                              | 1        |
|                                 | 1       | 74        | 23.23                 | 23.43                 | 23.82                 | 23.50                 | 23.09                 |                              | 1        |
|                                 | 36      | 0         | 22.35                 | 22.55                 | 22.99                 | 22.71                 | 22.26                 | 0-2                          | 2        |
|                                 | 36      | 18        | 22.29                 | 22.48                 | 22.93                 | 22.63                 | 22.25                 |                              | 2        |
|                                 | 36      | 37        | 22.21                 | 22.44                 | 22.91                 | 22.57                 | 22.10                 |                              | 2        |
|                                 | 75      | 0         | 22.26                 | 22.47                 | 22.91                 | 22.63                 | 22.18                 |                              | 2        |
| 64QAM                           | 1       | 0         | 21.61                 | 22.52                 | 22.94                 | 22.65                 | 22.28                 | 0-2                          | 2        |
|                                 | 1       | 36        | 21.85                 | 22.35                 | 22.75                 | 22.47                 | 22.09                 |                              | 2        |
|                                 | 1       | 74        | 21.87                 | 22.31                 | 22.70                 | 22.38                 | 21.97                 |                              | 2        |
|                                 | 36      | 0         | 21.27                 | 21.50                 | 21.97                 | 21.66                 | 21.25                 | 0-3                          | 3        |
|                                 | 36      | 18        | 21.27                 | 21.47                 | 21.92                 | 21.59                 | 21.20                 |                              | 3        |
|                                 | 36      | 37        | 21.19                 | 21.40                 | 21.82                 | 21.52                 | 21.11                 |                              | 3        |
|                                 | 75      | 0         | 21.29                 | 21.50                 | 21.95                 | 21.66                 | 21.20                 |                              | 3        |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | SAR EVALUATION REPORT        |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 53 of 100                  |

**Table 8-67**  
**LTE Band 41 PC3 Maximum Conducted Powers - 10 MHz Bandwidth**

| LTE Band 41<br>10 MHz Bandwidth |         |           |                       |                       |                       |                       |                       |                              |          |
|---------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                      | RB Size | RB Offset | Low Channel           | Low-Mid Channel       | Mid Channel           | Mid-High Channel      | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                 |         |           | 39750<br>(2506.0 MHz) | 40185<br>(2549.5 MHz) | 40620<br>(2593.0 MHz) | 41055<br>(2636.5 MHz) | 41490<br>(2680.0 MHz) |                              |          |
|                                 |         |           | Conducted Power [dBm] |                       |                       |                       |                       |                              |          |
| QPSK                            | 1       | 0         | 24.33                 | 24.56                 | 24.97                 | 24.70                 | 24.29                 | 0                            | 0        |
|                                 | 1       | 25        | 24.23                 | 24.43                 | 24.85                 | 24.55                 | 24.15                 |                              | 0        |
|                                 | 1       | 49        | 24.14                 | 24.36                 | 24.78                 | 24.45                 | 24.04                 |                              | 0        |
|                                 | 25      | 0         | 23.27                 | 23.50                 | 23.92                 | 23.68                 | 23.22                 | 0-1                          | 1        |
|                                 | 25      | 12        | 23.24                 | 23.47                 | 23.92                 | 23.60                 | 23.18                 |                              | 1        |
|                                 | 25      | 25        | 23.18                 | 23.43                 | 23.84                 | 23.56                 | 23.12                 |                              | 1        |
| 16QAM                           | 50      | 0         | 23.21                 | 23.45                 | 23.91                 | 23.59                 | 23.16                 | 0-1                          | 1        |
|                                 | 1       | 0         | 23.37                 | 23.58                 | 23.99                 | 23.75                 | 23.33                 |                              | 1        |
|                                 | 1       | 25        | 23.29                 | 23.49                 | 23.92                 | 23.62                 | 23.20                 |                              | 1        |
|                                 | 1       | 49        | 23.22                 | 23.44                 | 23.85                 | 23.54                 | 23.15                 | 0-2                          | 1        |
|                                 | 25      | 0         | 22.19                 | 22.42                 | 22.89                 | 22.60                 | 22.16                 |                              | 2        |
|                                 | 25      | 12        | 22.19                 | 22.39                 | 22.85                 | 22.54                 | 22.15                 |                              | 2        |
| 64QAM                           | 25      | 25        | 22.13                 | 22.35                 | 22.79                 | 22.50                 | 22.02                 | 0-2                          | 2        |
|                                 | 50      | 0         | 22.26                 | 22.45                 | 22.95                 | 22.64                 | 22.20                 |                              | 2        |
|                                 | 1       | 0         | 22.22                 | 22.44                 | 22.84                 | 22.56                 | 22.17                 |                              | 0-3      |
|                                 | 1       | 25        | 22.12                 | 22.33                 | 22.75                 | 22.45                 | 22.07                 | 2                            |          |
|                                 | 1       | 49        | 22.07                 | 22.30                 | 22.69                 | 22.39                 | 21.97                 | 2                            |          |
|                                 | 25      | 0         | 21.34                 | 21.57                 | 21.99                 | 21.74                 | 21.29                 | 0-3                          | 3        |
| 25                              | 12      | 21.36     | 21.58                 | 21.97                 | 21.70                 | 21.30                 | 3                     |                              |          |
| 25                              | 25      | 21.27     | 21.50                 | 21.93                 | 21.62                 | 21.17                 | 3                     |                              |          |
|                                 | 50      | 0         | 21.27                 | 21.49                 | 21.95                 | 21.64                 | 21.23                 |                              | 3        |

**Table 8-68**  
**LTE Band 41 PC3 Maximum Conducted Powers - 5 MHz Bandwidth**

| LTE Band 41<br>5 MHz Bandwidth |         |           |                       |                       |                       |                       |                       |                              |          |   |
|--------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|------------------------------|----------|---|
| Modulation                     | RB Size | RB Offset | Low Channel           | Low-Mid Channel       | Mid Channel           | Mid-High Channel      | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |   |
|                                |         |           | 39750<br>(2506.0 MHz) | 40185<br>(2549.5 MHz) | 40620<br>(2593.0 MHz) | 41055<br>(2636.5 MHz) | 41490<br>(2680.0 MHz) |                              |          |   |
|                                |         |           | Conducted Power [dBm] |                       |                       |                       |                       |                              |          |   |
| QPSK                           | 1       | 0         | 24.23                 | 24.46                 | 24.87                 | 24.58                 | 24.19                 | 0                            | 0        |   |
|                                | 1       | 12        | 24.21                 | 24.42                 | 24.83                 | 24.52                 | 24.13                 |                              | 0        |   |
|                                | 1       | 24        | 24.13                 | 24.37                 | 24.78                 | 24.46                 | 24.07                 |                              | 0        |   |
|                                | 12      | 0         | 23.22                 | 23.46                 | 23.89                 | 23.58                 | 23.16                 | 0-1                          | 1        |   |
|                                | 12      | 6         | 23.22                 | 23.42                 | 23.90                 | 23.60                 | 23.15                 |                              | 1        |   |
|                                | 12      | 13        | 23.18                 | 23.40                 | 23.83                 | 23.56                 | 23.11                 |                              | 1        |   |
| 16QAM                          | 25      | 0         | 23.21                 | 23.43                 | 23.87                 | 23.58                 | 23.14                 | 0-1                          | 1        |   |
|                                | 1       | 0         | 23.32                 | 23.54                 | 23.95                 | 23.66                 | 23.30                 |                              | 0-2      | 1 |
|                                | 1       | 12        | 23.29                 | 23.49                 | 23.93                 | 23.64                 | 23.24                 |                              |          | 1 |
|                                | 1       | 24        | 23.25                 | 23.51                 | 23.88                 | 23.59                 | 23.19                 | 0-2                          |          | 2 |
|                                | 12      | 0         | 22.25                 | 22.50                 | 22.96                 | 22.66                 | 22.20                 |                              | 2        |   |
|                                | 12      | 6         | 22.26                 | 22.52                 | 22.98                 | 22.66                 | 22.23                 |                              | 2        |   |
| 64QAM                          | 12      | 13        | 22.23                 | 22.45                 | 22.93                 | 22.60                 | 22.15                 | 0-2                          | 2        |   |
|                                | 25      | 0         | 22.17                 | 22.39                 | 22.83                 | 22.52                 | 22.13                 |                              | 0-3      | 2 |
|                                | 1       | 0         | 22.19                 | 22.42                 | 22.83                 | 22.53                 | 22.15                 |                              |          | 2 |
|                                | 1       | 12        | 22.17                 | 22.41                 | 22.80                 | 22.49                 | 22.10                 | 0-3                          |          | 2 |
|                                | 1       | 24        | 22.12                 | 22.36                 | 22.78                 | 22.43                 | 22.04                 |                              | 2        |   |
|                                | 12      | 0         | 21.21                 | 21.42                 | 21.87                 | 21.57                 | 21.14                 |                              | 3        |   |
|                                | 12      | 6         | 21.21                 | 21.41                 | 21.87                 | 21.58                 | 21.15                 | 0-3                          | 3        |   |
|                                | 12      | 13        | 21.16                 | 21.38                 | 21.81                 | 21.53                 | 21.13                 |                              | 3        |   |
|                                | 25      | 0         | 21.32                 | 21.53                 | 21.98                 | 21.68                 | 21.26                 |                              | 3        |   |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | <b>SAR EVALUATION REPORT</b> |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet | Page 54 of 100                                                                        |                                 |

**Table 8-69**  
**LTE Band 41 PC3 Reduced Conducted Powers - 20 MHz Bandwidth**

| LTE Band 41<br>20 MHz Bandwidth |         |           |                       |                       |                       |                       |                       |                              |          |
|---------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                      | RB Size | RB Offset | Low Channel           | Low-Mid Channel       | Mid Channel           | Mid-High Channel      | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                 |         |           | 39750<br>(2506.0 MHz) | 40185<br>(2549.5 MHz) | 40620<br>(2593.0 MHz) | 41055<br>(2636.5 MHz) | 41490<br>(2680.0 MHz) |                              |          |
|                                 |         |           | Conducted Power [dBm] |                       |                       |                       |                       |                              |          |
| QPSK                            | 1       | 0         | 14.02                 | 14.24                 | 14.60                 | 14.35                 | 13.95                 | 0                            | 0        |
|                                 | 1       | 50        | 13.86                 | 14.27                 | 14.44                 | 14.19                 | 13.77                 |                              | 0        |
|                                 | 1       | 99        | 13.69                 | 13.92                 | 14.39                 | 13.96                 | 13.60                 |                              | 0        |
|                                 | 50      | 0         | 14.01                 | 14.25                 | 14.61                 | 14.32                 | 13.85                 | 0-1                          | 0        |
|                                 | 50      | 25        | 13.91                 | 14.18                 | 14.54                 | 14.22                 | 13.76                 |                              | 0        |
|                                 | 50      | 50        | 13.84                 | 14.11                 | 14.48                 | 14.09                 | 13.68                 |                              | 0        |
| 16QAM                           | 100     | 0         | 13.92                 | 14.22                 | 14.52                 | 14.24                 | 13.80                 | 0                            | 0        |
|                                 | 1       | 0         | 14.17                 | 14.45                 | 14.69                 | 14.48                 | 14.01                 | 0-1                          | 0        |
|                                 | 1       | 50        | 13.93                 | 14.50                 | 14.73                 | 14.24                 | 13.80                 |                              | 0        |
|                                 | 1       | 99        | 13.80                 | 14.12                 | 14.35                 | 14.01                 | 13.71                 |                              | 0        |
|                                 | 50      | 0         | 14.05                 | 14.27                 | 14.63                 | 14.36                 | 13.89                 | 0-2                          | 0        |
|                                 | 50      | 25        | 13.95                 | 14.28                 | 14.55                 | 14.28                 | 13.82                 |                              | 0        |
| 50                              | 50      | 13.86     | 14.13                 | 14.47                 | 14.17                 | 13.74                 | 0                     |                              |          |
| 64QAM                           | 100     | 0         | 13.96                 | 14.29                 | 14.60                 | 14.28                 | 13.86                 | 0                            | 0        |
|                                 | 1       | 0         | 14.04                 | 14.33                 | 14.63                 | 14.39                 | 13.90                 | 0-2                          | 0        |
|                                 | 1       | 50        | 13.94                 | 14.13                 | 14.44                 | 14.12                 | 13.69                 |                              | 0        |
|                                 | 1       | 99        | 13.71                 | 13.97                 | 14.33                 | 13.96                 | 13.55                 |                              | 0        |
|                                 | 50      | 0         | 14.05                 | 14.31                 | 14.61                 | 14.30                 | 13.92                 | 0-3                          | 0        |
|                                 | 50      | 25        | 14.04                 | 14.26                 | 14.57                 | 14.35                 | 13.81                 |                              | 0        |
| 50                              | 50      | 13.91     | 14.11                 | 14.52                 | 14.21                 | 13.77                 | 0                     |                              |          |
|                                 | 100     | 0         | 13.97                 | 14.27                 | 14.57                 | 14.29                 | 13.82                 | 0                            | 0        |

**Table 8-70**  
**LTE Band 41 PC3 Reduced Conducted Powers - 15 MHz Bandwidth**

| LTE Band 41<br>15 MHz Bandwidth |         |           |                       |                       |                       |                       |                       |                              |          |
|---------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                      | RB Size | RB Offset | Low Channel           | Low-Mid Channel       | Mid Channel           | Mid-High Channel      | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                 |         |           | 39750<br>(2506.0 MHz) | 40185<br>(2549.5 MHz) | 40620<br>(2593.0 MHz) | 41055<br>(2636.5 MHz) | 41490<br>(2680.0 MHz) |                              |          |
|                                 |         |           | Conducted Power [dBm] |                       |                       |                       |                       |                              |          |
| QPSK                            | 1       | 0         | 14.20                 | 14.44                 | 14.85                 | 14.60                 | 14.19                 | 0                            | 0        |
|                                 | 1       | 36        | 14.04                 | 14.24                 | 14.65                 | 14.39                 | 13.94                 |                              | 0        |
|                                 | 1       | 74        | 13.99                 | 14.17                 | 14.57                 | 14.24                 | 13.85                 |                              | 0        |
|                                 | 36      | 0         | 14.17                 | 14.37                 | 14.78                 | 14.51                 | 14.09                 | 0-1                          | 0        |
|                                 | 36      | 18        | 14.13                 | 14.32                 | 14.73                 | 14.45                 | 14.04                 |                              | 0        |
|                                 | 36      | 37        | 14.05                 | 14.27                 | 14.65                 | 14.35                 | 13.94                 |                              | 0        |
| 16QAM                           | 75      | 0         | 14.10                 | 14.32                 | 14.70                 | 14.42                 | 14.02                 | 0                            | 0        |
|                                 | 1       | 0         | 14.34                 | 14.21                 | 14.95                 | 14.68                 | 14.33                 | 0-1                          | 0        |
|                                 | 1       | 36        | 14.13                 | 14.42                 | 14.76                 | 14.48                 | 14.10                 |                              | 0        |
|                                 | 1       | 74        | 14.06                 | 14.37                 | 14.68                 | 14.36                 | 14.00                 |                              | 0        |
|                                 | 36      | 0         | 14.20                 | 14.43                 | 14.82                 | 14.54                 | 14.17                 | 0-2                          | 0        |
|                                 | 36      | 18        | 14.17                 | 14.38                 | 14.77                 | 14.47                 | 14.09                 |                              | 0        |
| 36                              | 37      | 14.09     | 14.30                 | 14.72                 | 14.40                 | 14.01                 | 0                     |                              |          |
| 64QAM                           | 75      | 0         | 14.14                 | 14.36                 | 14.74                 | 14.47                 | 14.06                 | 0                            | 0        |
|                                 | 1       | 0         | 14.18                 | 14.41                 | 14.78                 | 14.53                 | 14.16                 | 0-2                          | 0        |
|                                 | 1       | 36        | 14.01                 | 14.92                 | 14.60                 | 14.34                 | 13.97                 |                              | 0        |
|                                 | 1       | 74        | 13.97                 | 14.24                 | 14.56                 | 14.24                 | 13.86                 |                              | 0        |
|                                 | 36      | 0         | 14.18                 | 14.38                 | 14.77                 | 14.52                 | 14.14                 | 0-3                          | 0        |
|                                 | 36      | 18        | 14.16                 | 14.41                 | 14.79                 | 14.47                 | 14.09                 |                              | 0        |
| 36                              | 37      | 14.08     | 14.30                 | 14.72                 | 14.38                 | 13.98                 | 0                     |                              |          |
|                                 | 75      | 0         | 14.17                 | 14.39                 | 14.77                 | 14.49                 | 14.10                 | 0                            | 0        |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | <b>SAR EVALUATION REPORT</b> |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet | Page 55 of 100                                                                        |                                 |



**Table 8-71**  
**LTE Band 41 PC3 Reduced Conducted Powers - 10 MHz Bandwidth**

| LTE Band 41<br>10 MHz Bandwidth |         |           |                       |                       |                       |                       |                       |                              |          |
|---------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                      | RB Size | RB Offset | Low Channel           | Low-Mid Channel       | Mid Channel           | Mid-High Channel      | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                 |         |           | 39750<br>(2506.0 MHz) | 40185<br>(2549.5 MHz) | 40620<br>(2593.0 MHz) | 41055<br>(2636.5 MHz) | 41490<br>(2680.0 MHz) |                              |          |
|                                 |         |           | Conducted Power [dBm] |                       |                       |                       |                       |                              |          |
| QPSK                            | 1       | 0         | 14.16                 | 14.37                 | 14.76                 | 14.50                 | 14.11                 | 0                            | 0        |
|                                 | 1       | 25        | 14.05                 | 14.26                 | 14.66                 | 14.34                 | 13.96                 |                              | 0        |
|                                 | 1       | 49        | 13.96                 | 14.20                 | 14.57                 | 14.25                 | 13.87                 |                              | 0        |
|                                 | 25      | 0         | 14.09                 | 14.36                 | 14.76                 | 14.45                 | 14.05                 | 0-1                          | 0        |
|                                 | 25      | 12        | 14.10                 | 14.30                 | 14.74                 | 14.40                 | 14.02                 |                              | 0        |
|                                 | 25      | 25        | 14.01                 | 14.25                 | 14.68                 | 14.35                 | 13.95                 |                              | 0        |
|                                 | 50      | 0         | 14.09                 | 14.28                 | 14.67                 | 14.40                 | 14.01                 |                              | 0        |
| 16QAM                           | 1       | 0         | 14.24                 | 14.48                 | 14.86                 | 14.58                 | 14.21                 | 0-1                          | 0        |
|                                 | 1       | 25        | 14.11                 | 14.38                 | 14.77                 | 14.45                 | 14.09                 |                              | 0        |
|                                 | 1       | 49        | 14.05                 | 14.35                 | 14.70                 | 14.39                 | 14.01                 |                              | 0        |
|                                 | 25      | 0         | 14.03                 | 14.31                 | 14.71                 | 14.42                 | 14.05                 | 0-2                          | 0        |
|                                 | 25      | 12        | 14.03                 | 14.31                 | 14.71                 | 14.35                 | 14.02                 |                              | 0        |
|                                 | 25      | 25        | 13.97                 | 14.25                 | 14.63                 | 14.30                 | 13.91                 |                              | 0        |
|                                 | 50      | 0         | 14.12                 | 14.38                 | 14.76                 | 14.45                 | 14.05                 |                              | 0        |
| 64QAM                           | 1       | 0         | 14.08                 | 14.32                 | 14.69                 | 14.43                 | 14.07                 | 0-2                          | 0        |
|                                 | 1       | 25        | 13.98                 | 14.24                 | 14.60                 | 14.30                 | 13.93                 |                              | 0        |
|                                 | 1       | 49        | 13.91                 | 14.19                 | 14.53                 | 14.24                 | 13.85                 |                              | 0        |
|                                 | 25      | 0         | 14.24                 | 14.44                 | 14.84                 | 14.55                 | 14.17                 | 0-3                          | 0        |
|                                 | 25      | 12        | 14.21                 | 14.46                 | 14.83                 | 14.53                 | 14.16                 |                              | 0        |
|                                 | 25      | 25        | 14.13                 | 14.39                 | 14.77                 | 14.45                 | 14.05                 |                              | 0        |
|                                 | 50      | 0         | 14.12                 | 14.37                 | 14.76                 | 14.46                 | 14.11                 |                              | 0        |

**Table 8-72**  
**LTE Band 41 PC3 Reduced Conducted Powers - 5 MHz Bandwidth**

| LTE Band 41<br>5 MHz Bandwidth |         |           |                       |                       |                       |                       |                       |                              |          |
|--------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                     | RB Size | RB Offset | Low Channel           | Low-Mid Channel       | Mid Channel           | Mid-High Channel      | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                |         |           | 39750<br>(2506.0 MHz) | 40185<br>(2549.5 MHz) | 40620<br>(2593.0 MHz) | 41055<br>(2636.5 MHz) | 41490<br>(2680.0 MHz) |                              |          |
|                                |         |           | Conducted Power [dBm] |                       |                       |                       |                       |                              |          |
| QPSK                           | 1       | 0         | 14.07                 | 14.31                 | 14.71                 | 14.41                 | 14.05                 | 0                            | 0        |
|                                | 1       | 12        | 14.05                 | 14.25                 | 14.65                 | 14.36                 | 13.96                 |                              | 0        |
|                                | 1       | 24        | 14.02                 | 14.22                 | 14.61                 | 14.30                 | 13.91                 |                              | 0        |
|                                | 12      | 0         | 14.10                 | 14.29                 | 14.68                 | 14.42                 | 14.02                 | 0-1                          | 0        |
|                                | 12      | 6         | 14.08                 | 14.34                 | 14.73                 | 14.42                 | 14.00                 |                              | 0        |
|                                | 12      | 13        | 14.04                 | 14.29                 | 14.68                 | 14.37                 | 13.94                 |                              | 0        |
|                                | 25      | 0         | 14.10                 | 14.30                 | 14.69                 | 14.39                 | 13.99                 |                              | 0        |
| 16QAM                          | 1       | 0         | 14.19                 | 14.45                 | 14.84                 | 14.53                 | 14.17                 | 0-1                          | 0        |
|                                | 1       | 12        | 14.14                 | 14.41                 | 14.77                 | 14.46                 | 14.08                 |                              | 0        |
|                                | 1       | 24        | 14.12                 | 14.38                 | 14.75                 | 14.42                 | 14.03                 |                              | 0        |
|                                | 12      | 0         | 14.12                 | 14.37                 | 14.73                 | 14.46                 | 14.07                 | 0-2                          | 0        |
|                                | 12      | 6         | 14.13                 | 14.39                 | 14.79                 | 14.45                 | 14.08                 |                              | 0        |
|                                | 12      | 13        | 14.08                 | 14.35                 | 14.74                 | 14.40                 | 14.03                 |                              | 0        |
|                                | 25      | 0         | 14.00                 | 14.27                 | 14.67                 | 14.34                 | 13.93                 |                              | 0        |
| 64QAM                          | 1       | 0         | 14.06                 | 14.27                 | 14.65                 | 14.35                 | 13.98                 | 0-2                          | 0        |
|                                | 1       | 12        | 13.99                 | 14.22                 | 14.60                 | 14.32                 | 13.93                 |                              | 0        |
|                                | 1       | 24        | 13.99                 | 14.20                 | 14.72                 | 14.27                 | 13.92                 |                              | 0        |
|                                | 12      | 0         | 14.07                 | 14.28                 | 14.66                 | 14.36                 | 14.00                 | 0-3                          | 0        |
|                                | 12      | 6         | 14.04                 | 14.30                 | 14.69                 | 14.37                 | 14.00                 |                              | 0        |
|                                | 12      | 13        | 14.04                 | 14.28                 | 14.67                 | 14.31                 | 13.96                 |                              | 0        |
|                                | 25      | 0         | 14.15                 | 14.39                 | 14.79                 | 14.50                 | 14.10                 |                              | 0        |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | <b>SAR EVALUATION REPORT</b> |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 56 of 100                  |

**Table 8-73**  
**LTE Band 41 PC2 Maximum Conducted Powers - 20 MHz Bandwidth**

| LTE Band 41<br>20 MHz Bandwidth |         |           |                       |                       |                       |                       |                       |                              |          |
|---------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                      | RB Size | RB Offset | Low Channel           | Low-Mid Channel       | Mid Channel           | Mid-High Channel      | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                 |         |           | 39750<br>(2506.0 MHz) | 40185<br>(2549.5 MHz) | 40620<br>(2593.0 MHz) | 41055<br>(2636.5 MHz) | 41490<br>(2680.0 MHz) |                              |          |
|                                 |         |           | Conducted Power [dBm] |                       |                       |                       |                       |                              |          |
| QPSK                            | 1       | 0         | 27.56                 | 27.57                 | 27.98                 | 27.64                 | 27.42                 | 0                            | 0        |
|                                 | 1       | 50        | 27.53                 | 27.42                 | 27.70                 | 27.47                 | 27.27                 |                              | 0        |
|                                 | 1       | 99        | 27.36                 | 27.41                 | 27.63                 | 27.41                 | 27.03                 |                              | 0        |
|                                 | 50      | 0         | 26.62                 | 26.50                 | 26.87                 | 26.58                 | 26.39                 | 0-1                          | 1        |
|                                 | 50      | 25        | 26.58                 | 26.42                 | 26.81                 | 26.59                 | 26.31                 |                              | 1        |
|                                 | 50      | 50        | 26.46                 | 26.38                 | 26.68                 | 26.49                 | 26.20                 |                              | 1        |
| 16QAM                           | 100     | 0         | 26.58                 | 26.46                 | 26.68                 | 26.22                 | 26.34                 | 0-1                          | 1        |
|                                 | 1       | 0         | 26.88                 | 26.85                 | 26.99                 | 26.97                 | 26.51                 |                              | 1        |
|                                 | 1       | 50        | 26.81                 | 26.68                 | 26.98                 | 26.76                 | 26.51                 |                              | 1        |
|                                 | 1       | 99        | 26.66                 | 26.69                 | 26.87                 | 26.66                 | 26.36                 | 0-2                          | 2        |
|                                 | 50      | 0         | 25.72                 | 25.53                 | 25.90                 | 25.71                 | 25.46                 |                              | 2        |
|                                 | 50      | 25        | 25.64                 | 25.50                 | 25.84                 | 25.67                 | 25.37                 |                              | 2        |
| 64QAM                           | 50      | 50        | 25.53                 | 25.41                 | 25.71                 | 25.58                 | 25.27                 | 0-2                          | 2        |
|                                 | 100     | 0         | 25.62                 | 25.54                 | 25.84                 | 25.47                 | 25.37                 |                              | 2        |
|                                 | 1       | 0         | 25.88                 | 25.96                 | 25.99                 | 25.86                 | 25.85                 |                              | 0-2      |
|                                 | 1       | 50        | 25.80                 | 25.89                 | 25.80                 | 25.56                 | 25.59                 | 2                            |          |
|                                 | 1       | 99        | 25.77                 | 25.99                 | 25.73                 | 25.40                 | 25.55                 | 2                            |          |
|                                 | 64QAM   | 50        | 0                     | 24.69                 | 24.98                 | 24.73                 | 24.38                 | 24.45                        | 0-3      |
| 50                              |         | 25        | 24.60                 | 24.94                 | 24.65                 | 24.36                 | 24.41                 | 3                            |          |
| 50                              |         | 50        | 24.57                 | 24.81                 | 24.60                 | 24.21                 | 24.32                 | 3                            |          |
| 100                             |         | 0         | 24.57                 | 24.87                 | 24.61                 | 24.30                 | 24.35                 | 3                            |          |

**Table 8-74**  
**LTE Band 41 PC2 Maximum Conducted Powers - 15 MHz Bandwidth**

| LTE Band 41<br>15 MHz Bandwidth |         |           |                       |                       |                       |                       |                       |                           |          |   |
|---------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|---------------------------|----------|---|
| Modulation                      | RB Size | RB Offset | Low Channel           | Low-Mid Channel       | Mid Channel           | Mid-High Channel      | High Channel          | MPR Allowed per 3GPP [dB] | MPR [dB] |   |
|                                 |         |           | 39750<br>(2506.0 MHz) | 40185<br>(2549.5 MHz) | 40620<br>(2593.0 MHz) | 41055<br>(2636.5 MHz) | 41490<br>(2680.0 MHz) |                           |          |   |
|                                 |         |           | Conducted Power [dBm] |                       |                       |                       |                       |                           |          |   |
| QPSK                            | 1       | 0         | 27.36                 | 27.65                 | 27.92                 | 27.69                 | 27.30                 | 0                         | 0        |   |
|                                 | 1       | 36        | 27.21                 | 27.46                 | 27.87                 | 27.51                 | 27.13                 |                           | 0        |   |
|                                 | 1       | 74        | 27.17                 | 27.44                 | 27.85                 | 27.46                 | 27.06                 |                           | 0        |   |
|                                 | 36      | 0         | 26.33                 | 26.52                 | 26.94                 | 26.65                 | 26.27                 | 0-1                       | 1        |   |
|                                 | 36      | 18        | 26.24                 | 26.49                 | 26.95                 | 26.60                 | 26.23                 |                           | 1        |   |
|                                 | 36      | 37        | 26.18                 | 26.40                 | 26.85                 | 26.56                 | 26.14                 |                           | 1        |   |
| 16QAM                           | 75      | 0         | 26.22                 | 26.47                 | 26.88                 | 26.58                 | 26.20                 | 1                         | 1        |   |
|                                 | 1       | 0         | 26.64                 | 26.94                 | 27.00                 | 27.00                 | 26.59                 |                           | 0-1      | 1 |
|                                 | 1       | 36        | 26.51                 | 26.76                 | 26.97                 | 26.79                 | 26.45                 |                           |          | 1 |
|                                 | 1       | 74        | 26.43                 | 26.72                 | 26.98                 | 26.70                 | 26.33                 | 0-2                       |          | 1 |
|                                 | 36      | 0         | 25.33                 | 25.57                 | 26.00                 | 25.71                 | 25.30                 |                           | 2        |   |
|                                 | 36      | 18        | 25.28                 | 25.52                 | 25.93                 | 25.66                 | 25.25                 |                           | 2        |   |
| 64QAM                           | 36      | 37        | 25.21                 | 25.47                 | 25.91                 | 25.60                 | 25.16                 | 2                         | 2        |   |
|                                 | 75      | 0         | 25.26                 | 25.52                 | 25.90                 | 25.64                 | 25.26                 |                           | 2        |   |
|                                 | 1       | 0         | 25.43                 | 25.66                 | 25.98                 | 25.83                 | 25.41                 |                           | 0-2      | 2 |
|                                 | 1       | 36        | 25.29                 | 25.51                 | 25.92                 | 25.61                 | 25.24                 | 2                         |          |   |
|                                 | 1       | 74        | 25.20                 | 25.43                 | 25.83                 | 25.49                 | 25.11                 | 2                         |          |   |
|                                 | 64QAM   | 36        | 0                     | 24.35                 | 24.61                 | 24.91                 | 24.72                 | 24.36                     | 0-3      | 3 |
| 36                              |         | 18        | 24.31                 | 24.55                 | 24.94                 | 24.66                 | 24.28                 | 3                         |          |   |
| 36                              |         | 37        | 24.22                 | 24.52                 | 24.90                 | 24.55                 | 24.15                 | 3                         |          |   |
| 75                              |         | 0         | 24.31                 | 24.57                 | 24.96                 | 24.66                 | 24.27                 | 3                         |          |   |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | <b>SAR EVALUATION REPORT</b> |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet | Page 57 of 100                                                                        |                                 |

**Table 8-75**  
**LTE Band 41 PC2 Maximum Conducted Powers - 10 MHz Bandwidth**

| LTE Band 41<br>10 MHz Bandwidth |         |           |                       |                       |                       |                       |                       |                              |          |
|---------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                      | RB Size | RB Offset | Low Channel           | Low-Mid Channel       | Mid Channel           | Mid-High Channel      | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                 |         |           | 39750<br>(2506.0 MHz) | 40185<br>(2549.5 MHz) | 40620<br>(2593.0 MHz) | 41055<br>(2636.5 MHz) | 41490<br>(2680.0 MHz) |                              |          |
|                                 |         |           | Conducted Power [dBm] |                       |                       |                       |                       |                              |          |
| QPSK                            | 1       | 0         | 27.32                 | 27.59                 | 27.99                 | 27.63                 | 27.27                 | 0                            | 0        |
|                                 | 1       | 25        | 27.22                 | 27.49                 | 27.88                 | 27.54                 | 27.17                 |                              | 0        |
|                                 | 1       | 49        | 27.18                 | 27.45                 | 27.83                 | 27.52                 | 27.13                 |                              | 0        |
|                                 | 25      | 0         | 26.29                 | 26.55                 | 26.94                 | 26.65                 | 26.25                 | 0-1                          | 1        |
|                                 | 25      | 12        | 26.27                 | 26.51                 | 26.96                 | 26.61                 | 26.21                 |                              | 1        |
|                                 | 25      | 25        | 26.22                 | 26.47                 | 26.88                 | 26.57                 | 26.14                 |                              | 1        |
|                                 | 50      | 0         | 26.27                 | 26.51                 | 26.92                 | 26.57                 | 26.19                 |                              | 1        |
| 16QAM                           | 1       | 0         | 26.60                 | 26.87                 | 27.00                 | 26.91                 | 26.56                 | 0-1                          | 1        |
|                                 | 1       | 25        | 26.50                 | 26.80                 | 26.93                 | 26.81                 | 26.46                 |                              | 1        |
|                                 | 1       | 49        | 26.47                 | 26.74                 | 26.82                 | 26.74                 | 26.36                 |                              | 1        |
|                                 | 25      | 0         | 25.25                 | 25.51                 | 25.91                 | 25.64                 | 25.20                 | 0-2                          | 2        |
|                                 | 25      | 12        | 25.23                 | 25.48                 | 25.93                 | 25.60                 | 25.19                 |                              | 2        |
|                                 | 25      | 25        | 25.14                 | 25.39                 | 25.85                 | 25.50                 | 25.12                 |                              | 2        |
|                                 | 50      | 0         | 25.25                 | 25.54                 | 25.93                 | 25.66                 | 25.23                 |                              | 2        |
| 64QAM                           | 1       | 0         | 25.37                 | 25.59                 | 25.78                 | 25.72                 | 25.36                 | 0-2                          | 2        |
|                                 | 1       | 25        | 25.28                 | 25.52                 | 25.93                 | 25.62                 | 25.23                 |                              | 2        |
|                                 | 1       | 49        | 25.20                 | 25.44                 | 25.87                 | 25.54                 | 25.15                 |                              | 2        |
|                                 | 25      | 0         | 24.39                 | 24.63                 | 24.80                 | 24.76                 | 24.36                 | 0-3                          | 3        |
|                                 | 25      | 12        | 24.37                 | 24.62                 | 24.80                 | 24.74                 | 24.33                 |                              | 3        |
|                                 | 25      | 25        | 24.31                 | 24.56                 | 24.97                 | 24.65                 | 24.27                 |                              | 3        |
|                                 | 50      | 0         | 24.31                 | 24.55                 | 24.98                 | 24.68                 | 24.29                 |                              | 3        |

**Table 8-76**  
**LTE Band 41 PC2 Maximum Conducted Powers - 5 MHz Bandwidth**

| LTE Band 41<br>5 MHz Bandwidth |         |           |                       |                       |                       |                       |                       |                              |          |
|--------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                     | RB Size | RB Offset | Low Channel           | Low-Mid Channel       | Mid Channel           | Mid-High Channel      | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                |         |           | 39750<br>(2506.0 MHz) | 40185<br>(2549.5 MHz) | 40620<br>(2593.0 MHz) | 41055<br>(2636.5 MHz) | 41490<br>(2680.0 MHz) |                              |          |
|                                |         |           | Conducted Power [dBm] |                       |                       |                       |                       |                              |          |
| QPSK                           | 1       | 0         | 27.25                 | 27.53                 | 27.89                 | 27.54                 | 27.18                 | 0                            | 0        |
|                                | 1       | 12        | 27.23                 | 27.47                 | 27.87                 | 27.52                 | 27.15                 |                              | 0        |
|                                | 1       | 24        | 27.24                 | 27.47                 | 27.87                 | 27.50                 | 27.15                 |                              | 0        |
|                                | 12      | 0         | 26.24                 | 26.47                 | 26.88                 | 26.59                 | 26.23                 | 0-1                          | 1        |
|                                | 12      | 6         | 26.25                 | 26.50                 | 26.89                 | 26.63                 | 26.19                 |                              | 1        |
|                                | 12      | 13        | 26.20                 | 26.44                 | 26.84                 | 26.52                 | 26.14                 |                              | 1        |
| 16QAM                          | 25      | 0         | 26.24                 | 26.48                 | 26.88                 | 26.58                 | 26.20                 | 0-1                          | 1        |
|                                | 1       | 0         | 26.57                 | 26.85                 | 26.98                 | 26.87                 | 26.53                 |                              | 1        |
|                                | 1       | 12        | 26.51                 | 26.79                 | 26.92                 | 26.83                 | 26.48                 |                              | 1        |
|                                | 1       | 24        | 26.50                 | 26.78                 | 26.88                 | 26.78                 | 26.42                 | 0-2                          | 2        |
|                                | 12      | 0         | 25.32                 | 25.56                 | 25.96                 | 25.69                 | 25.29                 |                              | 2        |
|                                | 12      | 6         | 25.35                 | 25.60                 | 26.00                 | 25.73                 | 25.31                 |                              | 2        |
| 64QAM                          | 12      | 13        | 25.26                 | 25.51                 | 25.96                 | 25.61                 | 25.25                 | 0-2                          | 2        |
|                                | 25      | 0         | 25.20                 | 25.46                 | 25.84                 | 25.57                 | 25.15                 |                              | 2        |
|                                | 1       | 0         | 25.31                 | 25.57                 | 25.97                 | 25.66                 | 25.29                 |                              | 0-2      |
|                                | 1       | 12        | 25.30                 | 25.57                 | 25.98                 | 25.63                 | 25.24                 | 2                            |          |
|                                | 1       | 24        | 25.24                 | 25.49                 | 25.87                 | 25.56                 | 25.18                 | 2                            |          |
|                                | 64QAM   | 12        | 0                     | 24.23                 | 24.49                 | 24.89                 | 24.60                 | 24.22                        | 0-3      |
| 12                             |         | 6         | 24.26                 | 24.52                 | 24.90                 | 24.59                 | 24.21                 | 3                            |          |
| 12                             |         | 13        | 24.18                 | 24.44                 | 24.85                 | 24.55                 | 24.15                 | 3                            |          |
| 25                             |         | 0         | 24.31                 | 24.58                 | 24.99                 | 24.68                 | 24.30                 | 3                            |          |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | SAR EVALUATION REPORT        |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 58 of 100                  |

**Table 8-77**  
**LTE Band 41 PC2 Reduced Conducted Powers - 20 MHz Bandwidth**

| LTE Band 41<br>20 MHz Bandwidth |         |           |                       |                       |                       |                       |                       |                              |          |
|---------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                      | RB Size | RB Offset | Low Channel           | Low-Mid Channel       | Mid Channel           | Mid-High Channel      | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                 |         |           | 39750<br>(2506.0 MHz) | 40185<br>(2549.5 MHz) | 40620<br>(2593.0 MHz) | 41055<br>(2636.5 MHz) | 41490<br>(2680.0 MHz) |                              |          |
|                                 |         |           | Conducted Power [dBm] |                       |                       |                       |                       |                              |          |
| QPSK                            | 1       | 0         | 14.07                 | 14.37                 | 14.68                 | 14.40                 | 13.89                 | 0                            | 0        |
|                                 | 1       | 50        | 13.90                 | 14.24                 | 14.53                 | 14.14                 | 13.71                 |                              | 0        |
|                                 | 1       | 99        | 13.85                 | 14.07                 | 14.51                 | 13.95                 | 13.58                 |                              | 0        |
|                                 | 50      | 0         | 13.98                 | 14.32                 | 14.58                 | 14.31                 | 13.87                 | 0-1                          | 0        |
|                                 | 50      | 25        | 13.90                 | 14.26                 | 14.46                 | 14.23                 | 13.75                 |                              | 0        |
|                                 | 50      | 50        | 13.85                 | 14.19                 | 14.48                 | 14.11                 | 13.68                 |                              | 0        |
|                                 | 100     | 0         | 13.92                 | 14.23                 | 14.55                 | 14.24                 | 13.78                 |                              | 0        |
| 16QAM                           | 1       | 0         | 14.30                 | 14.70                 | 14.95                 | 14.75                 | 14.24                 | 0-1                          | 0        |
|                                 | 1       | 50        | 14.19                 | 14.72                 | 14.79                 | 14.46                 | 14.34                 |                              | 0        |
|                                 | 1       | 99        | 14.02                 | 14.37                 | 14.70                 | 14.28                 | 13.92                 |                              | 0        |
|                                 | 50      | 0         | 14.07                 | 14.37                 | 14.65                 | 14.37                 | 13.89                 | 0-2                          | 0        |
|                                 | 50      | 25        | 13.96                 | 14.34                 | 14.61                 | 14.32                 | 13.82                 |                              | 0        |
|                                 | 50      | 50        | 13.91                 | 14.25                 | 14.52                 | 14.18                 | 13.84                 |                              | 0        |
|                                 | 100     | 0         | 13.97                 | 14.27                 | 14.62                 | 14.31                 | 13.85                 |                              | 0        |
| 64QAM                           | 1       | 0         | 14.44                 | 14.74                 | 14.96                 | 14.78                 | 14.28                 | 0-2                          | 0        |
|                                 | 1       | 50        | 14.60                 | 14.52                 | 14.81                 | 14.52                 | 14.05                 |                              | 0        |
|                                 | 1       | 99        | 14.05                 | 14.38                 | 14.67                 | 14.29                 | 13.65                 |                              | 0        |
|                                 | 50      | 0         | 14.10                 | 14.36                 | 14.75                 | 14.39                 | 13.98                 | 0-3                          | 0        |
|                                 | 50      | 25        | 14.03                 | 14.19                 | 14.59                 | 14.31                 | 13.88                 |                              | 0        |
|                                 | 50      | 50        | 13.92                 | 14.31                 | 14.54                 | 14.16                 | 13.79                 |                              | 0        |
|                                 | 100     | 0         | 13.99                 | 14.26                 | 14.58                 | 14.27                 | 13.80                 |                              | 0        |

**Table 8-78**  
**LTE Band 41 PC2 Reduced Conducted Powers - 15 MHz Bandwidth**

| LTE Band 41<br>15 MHz Bandwidth |         |           |                       |                       |                       |                       |                       |                           |          |
|---------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|---------------------------|----------|
| Modulation                      | RB Size | RB Offset | Low Channel           | Low-Mid Channel       | Mid Channel           | Mid-High Channel      | High Channel          | MPR Allowed per 3GPP [dB] | MPR [dB] |
|                                 |         |           | 39750<br>(2506.0 MHz) | 40185<br>(2549.5 MHz) | 40620<br>(2593.0 MHz) | 41055<br>(2636.5 MHz) | 41490<br>(2680.0 MHz) |                           |          |
|                                 |         |           | Conducted Power [dBm] |                       |                       |                       |                       |                           |          |
| QPSK                            | 1       | 0         | 14.34                 | 14.61                 | 15.00                 | 14.71                 | 14.31                 | 0                         | 0        |
|                                 | 1       | 36        | 14.17                 | 14.40                 | 14.79                 | 14.46                 | 14.06                 |                           | 0        |
|                                 | 1       | 74        | 14.08                 | 14.34                 | 14.75                 | 14.38                 | 14.01                 |                           | 0        |
|                                 | 36      | 0         | 14.25                 | 14.44                 | 14.88                 | 14.58                 | 14.17                 | 0-1                       | 0        |
|                                 | 36      | 18        | 14.20                 | 14.39                 | 14.79                 | 14.51                 | 14.14                 |                           | 0        |
|                                 | 36      | 37        | 14.11                 | 14.33                 | 14.74                 | 14.42                 | 14.01                 |                           | 0        |
| 16QAM                           | 75      | 0         | 14.21                 | 14.39                 | 14.83                 | 14.52                 | 14.13                 | 0                         | 0        |
|                                 | 1       | 0         | 14.65                 | 14.96                 | 15.00                 | 14.99                 | 14.69                 | 0-1                       | 0        |
|                                 | 1       | 36        | 14.51                 | 14.77                 | 14.98                 | 14.78                 | 14.45                 |                           | 0        |
|                                 | 1       | 74        | 14.41                 | 14.69                 | 14.90                 | 14.69                 | 14.34                 |                           | 0        |
|                                 | 36      | 0         | 14.27                 | 14.57                 | 14.94                 | 14.66                 | 14.30                 | 0-2                       | 0        |
|                                 | 36      | 18        | 14.24                 | 14.53                 | 14.94                 | 14.58                 | 14.21                 |                           | 0        |
| 36                              | 37      | 14.17     | 14.48                 | 14.86                 | 14.52                 | 14.12                 | 0                     |                           |          |
| 64QAM                           | 75      | 0         | 14.23                 | 14.49                 | 14.87                 | 14.57                 | 14.18                 | 0                         | 0        |
|                                 | 1       | 0         | 14.41                 | 14.69                 | 14.98                 | 14.78                 | 14.42                 | 0-2                       | 0        |
|                                 | 1       | 36        | 14.28                 | 14.53                 | 14.85                 | 14.61                 | 14.19                 |                           | 0        |
|                                 | 1       | 74        | 14.20                 | 14.48                 | 14.79                 | 14.50                 | 14.13                 |                           | 0        |
|                                 | 36      | 0         | 14.31                 | 14.52                 | 14.95                 | 14.66                 | 14.26                 | 0-3                       | 0        |
|                                 | 36      | 18        | 14.30                 | 14.49                 | 14.88                 | 14.58                 | 14.21                 |                           | 0        |
| 36                              | 37      | 14.22     | 14.42                 | 14.79                 | 14.47                 | 14.11                 | 0                     |                           |          |
|                                 | 75      | 0         | 14.28                 | 14.52                 | 14.91                 | 14.57                 | 14.22                 | 0                         |          |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | <b>SAR EVALUATION REPORT</b> |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet | Page 59 of 100                                                                        |                                 |

**Table 8-79**  
**LTE Band 41 PC2 Reduced Conducted Powers - 10 MHz Bandwidth**

| LTE Band 41<br>10 MHz Bandwidth |         |           |                       |                       |                       |                       |                       |                              |          |
|---------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                      | RB Size | RB Offset | Low Channel           | Low-Mid Channel       | Mid Channel           | Mid-High Channel      | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                 |         |           | 39750<br>(2506.0 MHz) | 40185<br>(2549.5 MHz) | 40620<br>(2593.0 MHz) | 41055<br>(2636.5 MHz) | 41490<br>(2680.0 MHz) |                              |          |
|                                 |         |           | Conducted Power [dBm] |                       |                       |                       |                       |                              |          |
| QPSK                            | 1       | 0         | 14.29                 | 14.53                 | 14.92                 | 14.65                 | 14.25                 | 0                            | 0        |
|                                 | 1       | 25        | 14.17                 | 14.42                 | 14.81                 | 14.49                 | 14.10                 |                              | 0        |
|                                 | 1       | 49        | 14.12                 | 14.35                 | 14.72                 | 14.41                 | 14.05                 |                              | 0        |
|                                 | 25      | 0         | 14.25                 | 14.45                 | 14.88                 | 14.57                 | 14.15                 | 0-1                          | 0        |
|                                 | 25      | 12        | 14.24                 | 14.46                 | 14.86                 | 14.54                 | 14.13                 |                              | 0        |
|                                 | 25      | 25        | 14.17                 | 14.40                 | 14.77                 | 14.46                 | 14.08                 |                              | 0        |
|                                 | 50      | 0         | 14.22                 | 14.41                 | 14.82                 | 14.54                 | 14.12                 |                              | 0        |
| 16QAM                           | 1       | 0         | 14.57                 | 14.83                 | 15.00                 | 14.92                 | 14.57                 | 0-1                          | 0        |
|                                 | 1       | 25        | 14.45                 | 14.74                 | 14.99                 | 14.78                 | 14.44                 |                              | 0        |
|                                 | 1       | 49        | 14.38                 | 14.72                 | 14.97                 | 14.72                 | 14.39                 |                              | 0        |
|                                 | 25      | 0         | 14.17                 | 14.43                 | 14.87                 | 14.56                 | 14.15                 | 0-2                          | 0        |
|                                 | 25      | 12        | 14.16                 | 14.44                 | 14.40                 | 14.53                 | 14.15                 |                              | 0        |
|                                 | 25      | 25        | 14.09                 | 14.37                 | 14.79                 | 14.46                 | 14.07                 |                              | 0        |
|                                 | 50      | 0         | 14.21                 | 14.50                 | 14.90                 | 14.57                 | 14.22                 |                              | 0        |
| 64QAM                           | 1       | 0         | 14.38                 | 14.59                 | 14.98                 | 14.67                 | 14.31                 | 0-2                          | 0        |
|                                 | 1       | 25        | 14.27                 | 14.53                 | 14.84                 | 14.58                 | 14.16                 |                              | 0        |
|                                 | 1       | 49        | 14.17                 | 14.47                 | 14.85                 | 14.47                 | 14.13                 |                              | 0        |
|                                 | 25      | 0         | 14.36                 | 14.62                 | 14.99                 | 14.72                 | 14.32                 | 0-3                          | 0        |
|                                 | 25      | 12        | 14.34                 | 14.61                 | 14.96                 | 14.66                 | 14.32                 |                              | 0        |
|                                 | 25      | 25        | 14.28                 | 14.56                 | 14.90                 | 14.61                 | 14.23                 |                              | 0        |
|                                 | 50      | 0         | 14.27                 | 14.53                 | 14.90                 | 14.62                 | 14.23                 |                              | 0        |

**Table 8-80**  
**LTE Band 41 PC2 Reduced Conducted Powers - 5 MHz Bandwidth**

| LTE Band 41<br>5 MHz Bandwidth |         |           |                       |                       |                       |                       |                       |                              |          |
|--------------------------------|---------|-----------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|------------------------------|----------|
| Modulation                     | RB Size | RB Offset | Low Channel           | Low-Mid Channel       | Mid Channel           | Mid-High Channel      | High Channel          | MPR Allowed per<br>3GPP [dB] | MPR [dB] |
|                                |         |           | 39750<br>(2506.0 MHz) | 40185<br>(2549.5 MHz) | 40620<br>(2593.0 MHz) | 41055<br>(2636.5 MHz) | 41490<br>(2680.0 MHz) |                              |          |
|                                |         |           | Conducted Power [dBm] |                       |                       |                       |                       |                              |          |
| QPSK                           | 1       | 0         | 14.21                 | 14.47                 | 14.88                 | 14.56                 | 14.15                 | 0                            | 0        |
|                                | 1       | 12        | 14.19                 | 14.39                 | 14.77                 | 14.49                 | 14.13                 |                              | 0        |
|                                | 1       | 24        | 14.14                 | 14.41                 | 14.78                 | 14.47                 | 14.07                 |                              | 0        |
|                                | 12      | 0         | 14.16                 | 14.41                 | 14.80                 | 14.49                 | 14.08                 | 0-1                          | 0        |
|                                | 12      | 6         | 14.20                 | 14.44                 | 14.83                 | 14.50                 | 14.12                 |                              | 0        |
|                                | 12      | 13        | 14.15                 | 14.34                 | 14.77                 | 14.45                 | 14.05                 |                              | 0        |
|                                | 25      | 0         | 14.16                 | 14.42                 | 14.80                 | 14.48                 | 14.07                 |                              | 0        |
| 16QAM                          | 1       | 0         | 14.53                 | 14.80                 | 15.00                 | 14.82                 | 14.49                 | 0-1                          | 0        |
|                                | 1       | 12        | 14.45                 | 14.74                 | 14.99                 | 14.79                 | 14.43                 |                              | 0        |
|                                | 1       | 24        | 14.44                 | 14.71                 | 14.95                 | 14.73                 | 14.36                 |                              | 0        |
|                                | 12      | 0         | 14.26                 | 14.51                 | 14.87                 | 14.57                 | 14.22                 | 0-2                          | 0        |
|                                | 12      | 6         | 14.26                 | 14.54                 | 14.94                 | 14.57                 | 14.21                 |                              | 0        |
|                                | 12      | 13        | 14.21                 | 14.48                 | 14.89                 | 14.52                 | 14.14                 |                              | 0        |
|                                | 25      | 0         | 14.11                 | 14.38                 | 14.80                 | 14.43                 | 14.05                 |                              | 0        |
| 64QAM                          | 1       | 0         | 14.30                 | 14.51                 | 14.89                 | 14.63                 | 14.23                 | 0-2                          | 0        |
|                                | 1       | 12        | 14.25                 | 14.51                 | 14.92                 | 14.56                 | 14.22                 |                              | 0        |
|                                | 1       | 24        | 14.22                 | 14.42                 | 14.82                 | 14.52                 | 14.10                 |                              | 0        |
|                                | 12      | 0         | 14.18                 | 14.42                 | 14.79                 | 14.48                 | 14.12                 | 0-3                          | 0        |
|                                | 12      | 6         | 14.19                 | 14.44                 | 14.84                 | 14.51                 | 14.10                 |                              | 0        |
|                                | 12      | 13        | 14.13                 | 14.40                 | 14.80                 | 14.44                 | 14.07                 |                              | 0        |
|                                | 25      | 0         | 14.26                 | 14.52                 | 14.92                 | 14.58                 | 14.23                 |                              | 0        |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | SAR EVALUATION REPORT        |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 60 of 100                  |

## 8.2.9 LTE Uplink Carrier Aggregation Conducted Powers

**Table 8-81**  
**Reduced LTE Uplink Carrier Aggregation Conducted Powers**

| Combination | PCC      |                     |                     |                             |            |            |                  | SCC      |                     |                     |                             |            |            |                  | Power                                 |                                   |
|-------------|----------|---------------------|---------------------|-----------------------------|------------|------------|------------------|----------|---------------------|---------------------|-----------------------------|------------|------------|------------------|---------------------------------------|-----------------------------------|
|             | PCC Band | PCC Bandwidth [MHz] | PCC (UL/DL) Channel | PCC (UL/DL) Frequency [MHz] | Modulation | PCC UL# RB | PCC UL RB Offset | SCC Band | SCC Bandwidth [MHz] | SCC (UL/DL) Channel | SCC (UL/DL) Frequency [MHz] | Modulation | SCC UL# RB | SCC UL RB Offset | LTE Tx.Power with UL CA Enabled (dBm) | LTE Single Carrier Tx Power (dBm) |
| CA_41C (1)  | LTE B41  | 20                  | 41490               | 2680.0                      | QPSK       | 50         | 0                | LTE B41  | 20                  | 41292               | 2660.2                      | QPSK       | 50         | 50               | 14.50                                 | 13.85                             |

### Notes:

1. This device supports uplink carrier aggregation for LTE CA\_41C with a maximum of two 20 MHz component carriers. For intraband contiguous carrier aggregation scenarios, 3GPP 36.101 Table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when non-contiguous RB allocation is implemented. The conducted powers and MPR settings in this device are permanently implemented per the above 3GPP requirements.
2. Per FCC Guidance, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
3. Uplink carrier aggregation is only possible when the device is operating with Power Class 3 for LTE Band 41.




**Figure 8-2**  
**Power Measurement Setup**

|                                             |                                                                                     |                                     |                                                                                       |                                        |
|---------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> A3LSMT837P                   |  | <b>SAR EVALUATION REPORT</b>        |  | <b>Approved by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>1M1806060119-01.A3L | <b>Test Dates:</b><br>06/11/18 - 06/26/18                                           | <b>DUT Type:</b><br>Portable Tablet |                                                                                       | Page 61 of 100                         |

### 8.3 WLAN Conducted Powers

**Table 8-82**  
**2.4 GHz WLAN Maximum Average RF Power – Ant 1**

| 2.4GHz Conducted Power [dBm] |         |                        |         |         |
|------------------------------|---------|------------------------|---------|---------|
| Freq [MHz]                   | Channel | IEEE Transmission Mode |         |         |
|                              |         | 802.11b                | 802.11g | 802.11n |
|                              |         | Average                | Average | Average |
| 2412                         | 1       | <b>13.32</b>           | 13.10   | 12.94   |
| 2437                         | 6       | 12.99                  | 12.79   | 12.67   |
| 2462                         | 11      | 13.31                  | 13.37   | 13.19   |

**Table 8-83**  
**2.4 GHz WLAN Maximum Average RF Power – Ant 2**

| 2.4GHz Conducted Power [dBm] |         |                        |         |         |
|------------------------------|---------|------------------------|---------|---------|
| Freq [MHz]                   | Channel | IEEE Transmission Mode |         |         |
|                              |         | 802.11b                | 802.11g | 802.11n |
|                              |         | Average                | Average | Average |
| 2412                         | 1       | <b>13.32</b>           | 13.17   | 13.05   |
| 2437                         | 6       | 12.89                  | 12.73   | 12.51   |
| 2462                         | 11      | 12.97                  | 12.85   | 12.66   |

**Table 8-84**  
**5 GHz WLAN Maximum Average RF Power – Ant 1**

| 5GHz (40MHz) Conducted Power [dBm] |         |                        |
|------------------------------------|---------|------------------------|
| Freq [MHz]                         | Channel | IEEE Transmission Mode |
|                                    |         | 802.11n                |
|                                    |         | Average                |
| 5190                               | 38      | 13.43                  |
| 5230                               | 46      | 13.29                  |
| 5270                               | 54      | 12.98                  |
| 5310                               | 62      | <b>13.19</b>           |
| 5510                               | 102     | <b>13.14</b>           |
| 5590                               | 118     | 12.87                  |
| 5630                               | 126     | 13.06                  |
| 5710                               | 142     | 12.73                  |
| 5755                               | 151     | <b>12.92</b>           |
| 5795                               | 159     | 12.45                  |

|                                      |                                                                                                                                   |                              |                                                                                       |                                 |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT        |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                                                                | DUT Type:<br>Portable Tablet |                                                                                       | Page 62 of 100                  |

**Table 8-85**  
**5 GHz WLAN Maximum Average RF Power – Ant 2**

| 5GHz (40MHz) Conducted Power [dBm] |         |                        |
|------------------------------------|---------|------------------------|
| Freq [MHz]                         | Channel | IEEE Transmission Mode |
|                                    |         | 802.11n                |
|                                    |         | Average                |
| 5190                               | 38      | 13.54                  |
| 5230                               | 46      | 12.69                  |
| 5270                               | 54      | 12.61                  |
| 5310                               | 62      | <b>13.12</b>           |
| 5510                               | 102     | 13.37                  |
| 5590                               | 118     | <b>13.48</b>           |
| 5630                               | 126     | 13.42                  |
| 5710                               | 142     | 13.36                  |
| 5755                               | 151     | 13.10                  |
| 5795                               | 159     | <b>13.42</b>           |

**Table 8-86**  
**2.4 GHz WLAN Reduced Average RF Power – Ant 1**

| 2.4GHz Conducted Power [dBm] |         |                        |         |         |
|------------------------------|---------|------------------------|---------|---------|
| Freq [MHz]                   | Channel | IEEE Transmission Mode |         |         |
|                              |         | 802.11b                | 802.11g | 802.11n |
|                              |         | Average                | Average | Average |
| 2412                         | 1       | <b>12.45</b>           | 12.32   | 12.16   |
| 2437                         | 6       | 12.14                  | 12.04   | 11.85   |
| 2462                         | 11      | 12.44                  | 12.46   | 12.41   |

**Table 8-87**  
**2.4 GHz WLAN Reduced Average RF Power – Ant 2**

| 2.4GHz Conducted Power [dBm] |         |                        |         |         |
|------------------------------|---------|------------------------|---------|---------|
| Freq [MHz]                   | Channel | IEEE Transmission Mode |         |         |
|                              |         | 802.11b                | 802.11g | 802.11n |
|                              |         | Average                | Average | Average |
| 2412                         | 1       | 11.60                  | 12.47   | 12.34   |
| 2437                         | 6       | <b>12.48</b>           | 12.26   | 12.11   |
| 2462                         | 11      | 11.87                  | 11.77   | 12.45   |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | SAR EVALUATION REPORT        |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 63 of 100                  |



**Table 8-88**  
**5 GHz WLAN Reduced Average RF Power – Ant 1**

| 5GHz (80MHz) Conducted Power [dBm] |         |                              |
|------------------------------------|---------|------------------------------|
| Freq [MHz]                         | Channel | IEEE<br>Transmission<br>Mode |
|                                    |         | 802.11ac                     |
|                                    |         | Average                      |
| 5210                               | 42      | 9.43                         |
| 5290                               | 58      | 8.47                         |
| 5530                               | 106     | 9.04                         |
| 5610                               | 122     | 9.16                         |
| 5690                               | 138     | 8.77                         |
| 5775                               | 155     | 9.26                         |

**Table 8-89**  
**5 GHz WLAN Reduced Average RF Power – Ant 2**

| 5GHz (80MHz) Conducted Power [dBm] |         |                              |
|------------------------------------|---------|------------------------------|
| Freq [MHz]                         | Channel | IEEE<br>Transmission<br>Mode |
|                                    |         | 802.11ac                     |
|                                    |         | Average                      |
| 5210                               | 42      | 9.21                         |
| 5290                               | 58      | 9.47                         |
| 5530                               | 106     | 9.17                         |
| 5610                               | 122     | 9.13                         |
| 5690                               | 138     | 8.78                         |
| 5775                               | 155     | 8.88                         |

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- The bolded data rate and channel above were tested for SAR.




**Figure 8-3**  
**Power Measurement Setup**

|                                             |                                                                                                                                                                                                        |                                        |
|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> A3LSMT837P                   |  <b>SAR EVALUATION REPORT</b>  | <b>Approved by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>1M1806060119-01.A3L | <b>Test Dates:</b><br>06/11/18 - 06/26/18                                                                                                                                                              | <b>DUT Type:</b><br>Portable Tablet    |
| Page 64 of 100                              |                                                                                                                                                                                                        |                                        |

## 8.4 Bluetooth Conducted Powers

Table 8-90  
Bluetooth Average RF Power

| Frequency<br>[MHz] | Data<br>Rate<br>[Mbps] | Channel<br>No. | Avg Conducted<br>Power |       |
|--------------------|------------------------|----------------|------------------------|-------|
|                    |                        |                | [dBm]                  | [mW]  |
| 2402               | 1.0                    | 0              | 7.44                   | 5.551 |
| 2441               | 1.0                    | 39             | 6.92                   | 4.921 |
| 2480               | 1.0                    | 78             | <b>8.32</b>            | 6.787 |
| 2402               | 2.0                    | 0              | 6.82                   | 4.808 |
| 2441               | 2.0                    | 39             | 6.36                   | 4.328 |
| 2480               | 2.0                    | 78             | 7.75                   | 5.955 |
| 2402               | 3.0                    | 0              | 6.87                   | 4.862 |
| 2441               | 3.0                    | 39             | 6.41                   | 4.378 |
| 2480               | 3.0                    | 78             | 7.80                   | 6.027 |

Note: The bolded data rates and channel above were tested for SAR.

|                                      |                                                                                                                                                                                                        |                                 |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  <b>SAR EVALUATION REPORT</b>  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                                                                                                                                     | DUT Type:<br>Portable Tablet    |
| Page 65 of 100                       |                                                                                                                                                                                                        |                                 |

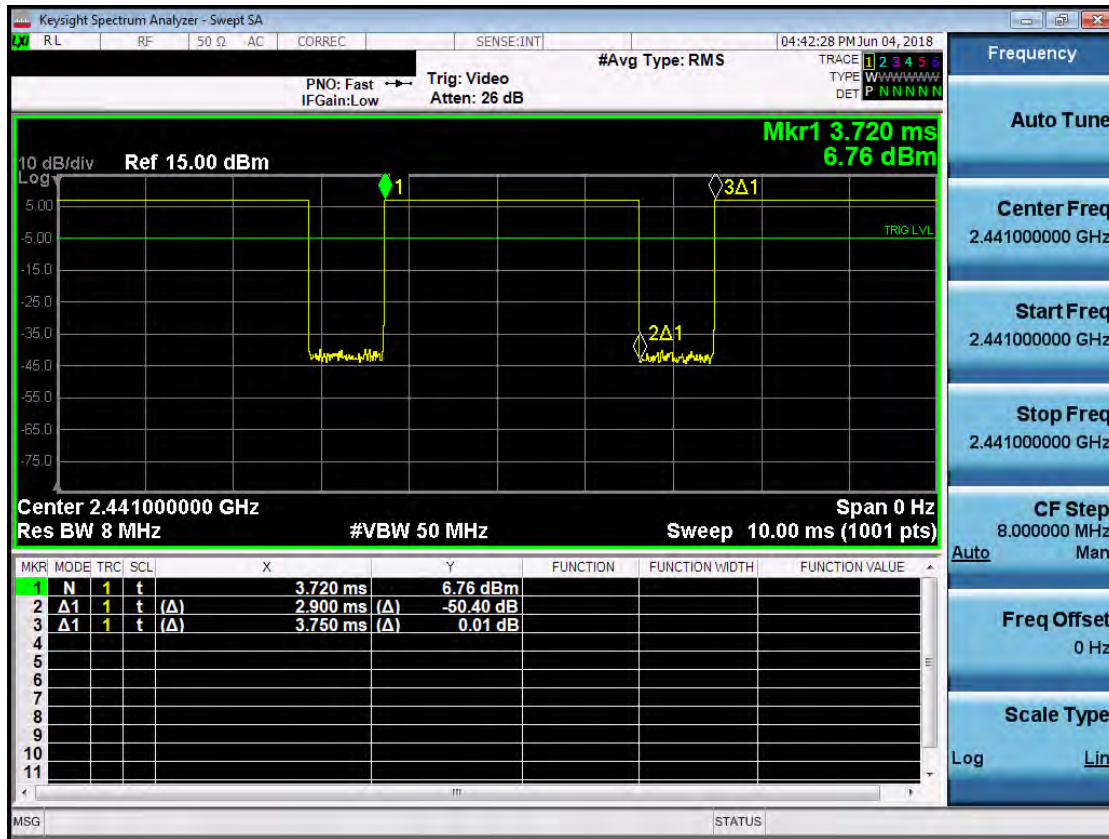


Figure 8-4  
Bluetooth Transmission Plot

Equation 8-1  
Bluetooth Duty Cycle Calculation

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.90s}{3.75ms} * 100\% = 77.3\%$$

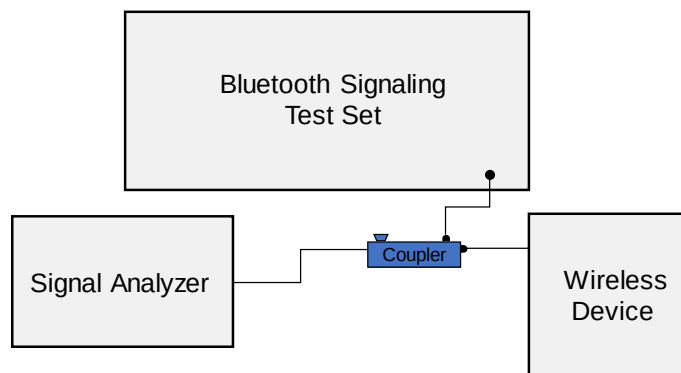


Figure 8-5  
Power Measurement Setup

|                                      |                                    |                              |  |                                 |
|--------------------------------------|------------------------------------|------------------------------|--|---------------------------------|
| FCC ID: A3LSMT837P                   |                                    |                              |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18 | DUT Type:<br>Portable Tablet |  | Page 66 of 100                  |

## 9 SYSTEM VERIFICATION

### 9.1 Tissue Verification

**Table 9-1**  
**Measured Tissue Properties**

| Calibrated for Tests Performed on: | Tissue Type | Tissue Temp During Calibration (°C) | Measured Frequency (MHz) | Measured Conductivity, $\sigma$ (S/m) | Measured Dielectric Constant, $\epsilon$ | TARGET Conductivity, $\sigma$ (S/m) | TARGET Dielectric Constant, $\epsilon$ | % dev $\sigma$ | % dev $\epsilon$ |
|------------------------------------|-------------|-------------------------------------|--------------------------|---------------------------------------|------------------------------------------|-------------------------------------|----------------------------------------|----------------|------------------|
| 06/13/2018                         | 750B        | 21.1                                | 700                      | 0.940                                 | 53.357                                   | 0.959                               | 55.726                                 | -1.98%         | -4.25%           |
|                                    |             |                                     | 710                      | 0.943                                 | 53.334                                   | 0.960                               | 55.687                                 | -1.77%         | -4.23%           |
|                                    |             |                                     | 740                      | 0.955                                 | 53.279                                   | 0.963                               | 55.570                                 | -0.83%         | -4.12%           |
|                                    |             |                                     | 755                      | 0.960                                 | 53.233                                   | 0.964                               | 55.512                                 | -0.41%         | -4.11%           |
|                                    |             |                                     | 770                      | 0.966                                 | 53.183                                   | 0.965                               | 55.453                                 | 0.10%          | -4.09%           |
|                                    |             |                                     | 785                      | 0.972                                 | 53.137                                   | 0.966                               | 55.395                                 | 0.62%          | -4.08%           |
| 06/14/2018                         | 835B        | 20.2                                | 820                      | 0.980                                 | 53.143                                   | 0.969                               | 55.258                                 | 1.14%          | -3.83%           |
|                                    |             |                                     | 835                      | 0.986                                 | 53.116                                   | 0.970                               | 55.200                                 | 1.65%          | -3.78%           |
|                                    |             |                                     | 850                      | 0.993                                 | 53.067                                   | 0.988                               | 55.154                                 | 0.51%          | -3.78%           |
| 06/18/2018                         | 835B        | 22.0                                | 820                      | 0.978                                 | 54.328                                   | 0.969                               | 55.258                                 | 0.93%          | -1.68%           |
|                                    |             |                                     | 835                      | 0.984                                 | 54.308                                   | 0.970                               | 55.200                                 | 1.44%          | -1.62%           |
|                                    |             |                                     | 850                      | 0.990                                 | 54.276                                   | 0.988                               | 55.154                                 | 0.20%          | -1.59%           |
| 06/19/2018                         | 1750B       | 22.1                                | 1710                     | 1.446                                 | 53.130                                   | 1.463                               | 53.537                                 | -1.16%         | -0.76%           |
|                                    |             |                                     | 1750                     | 1.478                                 | 53.073                                   | 1.488                               | 53.432                                 | -0.67%         | -0.67%           |
|                                    |             |                                     | 1790                     | 1.501                                 | 53.058                                   | 1.514                               | 53.326                                 | -0.86%         | -0.50%           |
| 06/11/2018                         | 1900B       | 22.2                                | 1850                     | 1.504                                 | 52.381                                   | 1.520                               | 53.300                                 | -1.05%         | -1.72%           |
|                                    |             |                                     | 1880                     | 1.541                                 | 52.341                                   | 1.520                               | 53.300                                 | 1.38%          | -1.80%           |
|                                    |             |                                     | 1910                     | 1.572                                 | 52.227                                   | 1.520                               | 53.300                                 | 3.42%          | -2.01%           |
| 06/18/2018                         | 1900B       | 22.0                                | 1850                     | 1.519                                 | 51.741                                   | 1.520                               | 53.300                                 | -0.07%         | -2.92%           |
|                                    |             |                                     | 1880                     | 1.554                                 | 51.642                                   | 1.520                               | 53.300                                 | 2.24%          | -3.11%           |
|                                    |             |                                     | 1910                     | 1.586                                 | 51.548                                   | 1.520                               | 53.300                                 | 4.34%          | -3.29%           |
| 06/18/2018                         | 2450B       | 23.3                                | 2450                     | 1.974                                 | 51.100                                   | 1.950                               | 52.700                                 | 1.23%          | -3.04%           |
|                                    |             |                                     | 2500                     | 2.039                                 | 50.930                                   | 2.021                               | 52.636                                 | 0.89%          | -3.24%           |
|                                    |             |                                     | 2550                     | 2.109                                 | 50.754                                   | 2.092                               | 52.573                                 | 0.81%          | -3.46%           |
|                                    |             |                                     | 2600                     | 2.178                                 | 50.574                                   | 2.163                               | 52.509                                 | 0.69%          | -3.69%           |
| 06/21/2018                         | 2450B       | 23.0                                | 2400                     | 1.914                                 | 52.599                                   | 1.902                               | 52.767                                 | 0.63%          | -0.32%           |
|                                    |             |                                     | 2450                     | 1.981                                 | 52.417                                   | 1.950                               | 52.700                                 | 1.59%          | -0.54%           |
|                                    |             |                                     | 2500                     | 2.050                                 | 52.230                                   | 2.021                               | 52.636                                 | 1.43%          | -0.77%           |
| 06/26/2018                         | 2450B       | 22.6                                | 2450                     | 2.025                                 | 50.962                                   | 1.950                               | 52.700                                 | 3.85%          | -3.30%           |
|                                    |             |                                     | 2500                     | 2.083                                 | 50.820                                   | 2.021                               | 52.636                                 | 3.07%          | -3.45%           |
|                                    |             |                                     | 2550                     | 2.142                                 | 50.697                                   | 2.092                               | 52.573                                 | 2.39%          | -3.57%           |
|                                    |             |                                     | 2600                     | 2.201                                 | 50.515                                   | 2.163                               | 52.509                                 | 1.76%          | -3.80%           |
|                                    |             |                                     | 2650                     | 2.261                                 | 50.392                                   | 2.234                               | 52.445                                 | 1.21%          | -3.91%           |
|                                    |             |                                     | 2700                     | 2.321                                 | 50.226                                   | 2.305                               | 52.382                                 | 0.69%          | -4.12%           |
| 06/18/2018                         | 5200B-5800B | 22.1                                | 5240                     | 5.442                                 | 47.528                                   | 5.346                               | 48.960                                 | 1.80%          | -2.92%           |
|                                    |             |                                     | 5260                     | 5.471                                 | 47.483                                   | 5.369                               | 48.933                                 | 1.90%          | -2.96%           |
|                                    |             |                                     | 5280                     | 5.476                                 | 47.468                                   | 5.393                               | 48.906                                 | 1.54%          | -2.94%           |
|                                    |             |                                     | 5300                     | 5.508                                 | 47.400                                   | 5.416                               | 48.879                                 | 1.70%          | -3.03%           |
|                                    |             |                                     | 5320                     | 5.547                                 | 47.378                                   | 5.439                               | 48.851                                 | 1.99%          | -3.02%           |
|                                    |             |                                     | 5500                     | 5.772                                 | 47.078                                   | 5.650                               | 48.607                                 | 2.16%          | -3.15%           |
|                                    |             |                                     | 5520                     | 5.799                                 | 47.077                                   | 5.673                               | 48.580                                 | 2.22%          | -3.09%           |
|                                    |             |                                     | 5540                     | 5.828                                 | 47.042                                   | 5.696                               | 48.553                                 | 2.32%          | -3.11%           |
|                                    |             |                                     | 5580                     | 5.893                                 | 46.940                                   | 5.743                               | 48.499                                 | 2.61%          | -3.21%           |
|                                    |             |                                     | 5600                     | 5.918                                 | 46.913                                   | 5.766                               | 48.471                                 | 2.64%          | -3.21%           |
|                                    |             |                                     | 5620                     | 5.934                                 | 46.911                                   | 5.790                               | 48.444                                 | 2.49%          | -3.16%           |
|                                    |             |                                     | 5745                     | 6.132                                 | 46.651                                   | 5.936                               | 48.275                                 | 3.30%          | -3.36%           |
|                                    |             |                                     | 5765                     | 6.153                                 | 46.692                                   | 5.959                               | 48.248                                 | 3.26%          | -3.23%           |
|                                    |             |                                     | 5785                     | 6.175                                 | 46.623                                   | 5.982                               | 48.220                                 | 3.23%          | -3.31%           |
|                                    |             |                                     | 5800                     | 6.197                                 | 46.610                                   | 6.000                               | 48.200                                 | 3.28%          | -3.30%           |

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | SAR EVALUATION REPORT        |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 67 of 100                  |

## 9.2 Test System Verification

Prior to SAR assessment, the system is verified to  $\pm 10\%$  of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.

**Table 9-2  
System Verification Results**

| System Verification<br>TARGET & MEASURED |                        |             |            |                |                  |                 |           |          |                                   |                                     |                                         |                             |
|------------------------------------------|------------------------|-------------|------------|----------------|------------------|-----------------|-----------|----------|-----------------------------------|-------------------------------------|-----------------------------------------|-----------------------------|
| SAR System #                             | Tissue Frequency (MHz) | Tissue Type | Date:      | Amb. Temp (°C) | Liquid Temp (°C) | Input Power (W) | Source SN | Probe SN | Measured SAR <sub>1g</sub> (W/kg) | 1 W Target SAR <sub>1g</sub> (W/kg) | 1 W Normalized SAR <sub>1g</sub> (W/kg) | Deviation <sub>1g</sub> (%) |
| J                                        | 750                    | BODY        | 06/13/2018 | 21.0           | 21.1             | 0.200           | 1003      | 3347     | 1.680                             | 8.580                               | 8.400                                   | -2.10%                      |
| J                                        | 835                    | BODY        | 06/14/2018 | 20.7           | 20.2             | 0.200           | 4d132     | 3347     | 2.100                             | 9.710                               | 10.500                                  | 8.14%                       |
| J                                        | 835                    | BODY        | 06/18/2018 | 21.5           | 22.0             | 0.200           | 4d132     | 3914     | 2.040                             | 9.710                               | 10.200                                  | 5.05%                       |
| G                                        | 1750                   | BODY        | 06/19/2018 | 22.6           | 21.7             | 0.100           | 1150      | 3332     | 3.670                             | 36.500                              | 36.700                                  | 0.55%                       |
| I                                        | 1900                   | BODY        | 06/11/2018 | 21.3           | 21.8             | 0.100           | 5d148     | 3287     | 4.270                             | 39.600                              | 42.700                                  | 7.83%                       |
| I                                        | 1900                   | BODY        | 06/18/2018 | 21.6           | 21.6             | 0.100           | 5d148     | 7406     | 4.200                             | 39.600                              | 42.000                                  | 6.06%                       |
| H                                        | 2450                   | BODY        | 06/18/2018 | 21.5           | 22.0             | 0.100           | 981       | 7410     | 4.850                             | 50.800                              | 48.500                                  | -4.53%                      |
| H                                        | 2450                   | BODY        | 06/21/2018 | 21.2           | 22.3             | 0.100           | 981       | 7410     | 4.930                             | 50.800                              | 49.300                                  | -2.95%                      |
| K                                        | 2450                   | BODY        | 06/26/2018 | 22.8           | 21.3             | 0.100           | 882       | 3319     | 5.020                             | 50.200                              | 50.200                                  | 0.00%                       |
| H                                        | 2600                   | BODY        | 06/18/2018 | 21.5           | 22.0             | 0.100           | 1071      | 7410     | 5.300                             | 54.200                              | 53.000                                  | -2.21%                      |
| K                                        | 2600                   | BODY        | 06/26/2018 | 22.8           | 21.3             | 0.100           | 1004      | 3319     | 5.600                             | 54.800                              | 56.000                                  | 2.19%                       |
| D                                        | 5250                   | BODY        | 06/18/2018 | 23.5           | 22.1             | 0.050           | 1237      | 7357     | 3.550                             | 76.900                              | 71.000                                  | -7.67%                      |
| D                                        | 5600                   | BODY        | 06/18/2018 | 23.5           | 22.1             | 0.050           | 1237      | 7357     | 3.950                             | 78.500                              | 79.000                                  | 0.64%                       |
| D                                        | 5750                   | BODY        | 06/18/2018 | 23.5           | 22.1             | 0.050           | 1237      | 7357     | 3.600                             | 77.100                              | 72.000                                  | -6.61%                      |

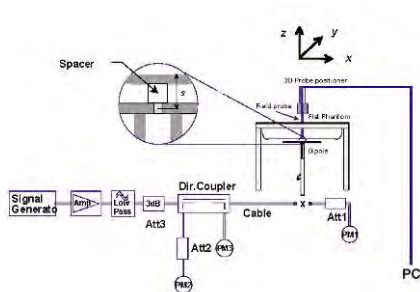


**Figure 9-1  
System Verification Setup Diagram**



**Figure 9-2  
System Verification Setup Photo**

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | SAR EVALUATION REPORT        |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 68 of 100                  |

# 10 SAR DATA SUMMARY

## 10.1 Standalone Body SAR Data

**Table 10-1**  
**EVDO Body SAR Data**

| MEASUREMENT RESULTS                                   |      |                   |             |                             |                       |                  |                         |                      |            |       |          |                |                   |        |
|-------------------------------------------------------|------|-------------------|-------------|-----------------------------|-----------------------|------------------|-------------------------|----------------------|------------|-------|----------|----------------|-------------------|--------|
| FREQUENCY                                             |      | Mode              | Service     | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | Spacing                 | Device Serial Number | Duty Cycle | Side  | SAR (1g) | Scaling Factor | Reported SAR (1g) | Plot # |
| MHz                                                   | Ch.  |                   |             |                             |                       |                  |                         |                      |            |       | (W/kg)   |                | (W/kg)            |        |
| 820.10                                                | 564  | CDMA BC10 (\$90S) | EVDO Rev. 0 | 25.0                        | 24.65                 | -0.03            | 16 mm                   | 42109                | 1:1        | back  | 0.815    | 1.084          | 0.883             |        |
| 820.10                                                | 564  | CDMA BC10 (\$90S) | EVDO Rev. 0 | 25.0                        | 24.65                 | -0.01            | 16 mm                   | 42109                | 1:1        | top   | 1.150    | 1.084          | 1.247             | A1     |
| 820.10                                                | 564  | CDMA BC10 (\$90S) | EVDO Rev. 0 | 25.0                        | 24.65                 | -0.02            | 0 mm                    | 42109                | 1:1        | right | 0.256    | 1.084          | 0.278             |        |
| 820.10                                                | 564  | CDMA BC10 (\$90S) | EVDO Rev. 0 | 25.0                        | 24.65                 | -0.16            | 0 mm                    | 42109                | 1:1        | left  | 0.138    | 1.084          | 0.150             |        |
| 820.10                                                | 564  | CDMA BC10 (\$90S) | EVDO Rev. 0 | 14.0                        | 13.40                 | -0.14            | 0 mm                    | 42299                | 1:1        | back  | 0.484    | 1.148          | 0.556             |        |
| 820.10                                                | 564  | CDMA BC10 (\$90S) | EVDO Rev. 0 | 14.0                        | 13.40                 | -0.05            | 0 mm                    | 42299                | 1:1        | top   | 0.499    | 1.148          | 0.573             |        |
| 824.70                                                | 1013 | CDMA BC0 (\$22H)  | EVDO Rev. 0 | 25.5                        | 24.81                 | 0.03             | 16 mm                   | 42109                | 1:1        | back  | 0.849    | 1.172          | 0.995             |        |
| 836.52                                                | 384  | CDMA BC0 (\$22H)  | EVDO Rev. 0 | 25.5                        | 24.75                 | -0.02            | 16 mm                   | 42109                | 1:1        | back  | 0.753    | 1.189          | 0.895             |        |
| 848.31                                                | 777  | CDMA BC0 (\$22H)  | EVDO Rev. 0 | 25.5                        | 24.27                 | 0.07             | 16 mm                   | 42109                | 1:1        | back  | 0.614    | 1.327          | 0.815             |        |
| 824.70                                                | 1013 | CDMA BC0 (\$22H)  | EVDO Rev. 0 | 25.5                        | 24.81                 | -0.04            | 16 mm                   | 42109                | 1:1        | top   | 1.170    | 1.172          | 1.371             | A2     |
| 836.52                                                | 384  | CDMA BC0 (\$22H)  | EVDO Rev. 0 | 25.5                        | 24.75                 | -0.04            | 16 mm                   | 42109                | 1:1        | top   | 1.060    | 1.189          | 1.260             |        |
| 848.31                                                | 777  | CDMA BC0 (\$22H)  | EVDO Rev. 0 | 25.5                        | 24.27                 | 0.10             | 16 mm                   | 42109                | 1:1        | top   | 0.854    | 1.327          | 1.133             |        |
| 824.70                                                | 1013 | CDMA BC0 (\$22H)  | EVDO Rev. 0 | 25.5                        | 24.81                 | 0.12             | 0 mm                    | 42109                | 1:1        | right | 0.253    | 1.172          | 0.297             |        |
| 824.70                                                | 1013 | CDMA BC0 (\$22H)  | EVDO Rev. 0 | 25.5                        | 24.81                 | -0.09            | 0 mm                    | 42109                | 1:1        | left  | 0.152    | 1.172          | 0.178             |        |
| 824.70                                                | 1013 | CDMA BC0 (\$22H)  | EVDO Rev. 0 | 16.0                        | 15.34                 | -0.11            | 0 mm                    | 42299                | 1:1        | back  | 0.757    | 1.164          | 0.881             |        |
| 836.52                                                | 384  | CDMA BC0 (\$22H)  | EVDO Rev. 0 | 16.0                        | 15.29                 | -0.11            | 0 mm                    | 42299                | 1:1        | back  | 0.718    | 1.178          | 0.846             |        |
| 848.31                                                | 777  | CDMA BC0 (\$22H)  | EVDO Rev. 0 | 16.0                        | 15.03                 | -0.12            | 0 mm                    | 42299                | 1:1        | back  | 0.691    | 1.250          | 0.864             |        |
| 824.70                                                | 1013 | CDMA BC0 (\$22H)  | EVDO Rev. 0 | 16.0                        | 15.34                 | -0.05            | 0 mm                    | 42299                | 1:1        | top   | 0.795    | 1.164          | 0.925             |        |
| 836.52                                                | 384  | CDMA BC0 (\$22H)  | EVDO Rev. 0 | 16.0                        | 15.29                 | -0.03            | 0 mm                    | 42299                | 1:1        | top   | 0.765    | 1.178          | 0.901             |        |
| 848.31                                                | 777  | CDMA BC0 (\$22H)  | EVDO Rev. 0 | 16.0                        | 15.03                 | -0.04            | 0 mm                    | 42299                | 1:1        | top   | 0.745    | 1.250          | 0.931             |        |
| 824.70                                                | 1013 | CDMA BC0 (\$22H)  | EVDO Rev. 0 | 25.5                        | 24.81                 | -0.06            | 16 mm                   | 42109                | 1:1        | top   | 1.160    | 1.172          | 1.360             |        |
| 1908.75                                               | 1175 | PCS CDMA          | EVDO Rev. 0 | 25.5                        | 24.69                 | -0.03            | 16 mm                   | 42109                | 1:1        | back  | 0.525    | 1.205          | 0.633             |        |
| 1851.25                                               | 25   | PCS CDMA          | EVDO Rev. 0 | 25.5                        | 24.01                 | 0.03             | 16 mm                   | 42109                | 1:1        | top   | 0.730    | 1.409          | 1.029             |        |
| 1880.00                                               | 600  | PCS CDMA          | EVDO Rev. 0 | 25.5                        | 23.77                 | 0.01             | 16 mm                   | 42109                | 1:1        | top   | 0.672    | 1.489          | 1.001             |        |
| 1908.75                                               | 1175 | PCS CDMA          | EVDO Rev. 0 | 25.5                        | 24.69                 | -0.07            | 16 mm                   | 42109                | 1:1        | top   | 0.706    | 1.205          | 0.851             |        |
| 1851.25                                               | 25   | PCS CDMA          | EVDO Rev. 0 | 25.5                        | 24.01                 | -0.01            | 0 mm                    | 42109                | 1:1        | right | 0.619    | 1.409          | 0.872             |        |
| 1880.00                                               | 600  | PCS CDMA          | EVDO Rev. 0 | 25.5                        | 23.77                 | 0.06             | 0 mm                    | 42109                | 1:1        | right | 0.693    | 1.489          | 1.032             |        |
| 1908.75                                               | 1175 | PCS CDMA          | EVDO Rev. 0 | 25.5                        | 24.69                 | 0.09             | 0 mm                    | 42109                | 1:1        | right | 0.690    | 1.205          | 0.831             |        |
| 1908.75                                               | 1175 | PCS CDMA          | EVDO Rev. 0 | 25.5                        | 24.69                 | 0.02             | 0 mm                    | 42109                | 1:1        | left  | 0.310    | 1.205          | 0.374             |        |
| 1851.25                                               | 25   | PCS CDMA          | EVDO Rev. 0 | 14.0                        | 13.16                 | 0.02             | 0 mm                    | 42125                | 1:1        | back  | 0.853    | 1.213          | 1.035             |        |
| 1880.00                                               | 600  | PCS CDMA          | EVDO Rev. 0 | 14.0                        | 12.95                 | 0.02             | 0 mm                    | 42125                | 1:1        | back  | 0.854    | 1.274          | 1.088             |        |
| 1908.75                                               | 1175 | PCS CDMA          | EVDO Rev. 0 | 14.0                        | 13.91                 | 0.05             | 0 mm                    | 42125                | 1:1        | back  | 0.918    | 1.021          | 0.937             | A3     |
| 1908.75                                               | 1175 | PCS CDMA          | EVDO Rev. 0 | 14.0                        | 13.91                 | -0.03            | 0 mm                    | 42125                | 1:1        | top   | 0.757    | 1.021          | 0.773             |        |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT<br>Spatial Peak |      |                   |             |                             |                       |                  | Body<br>1.6 W/kg (mW/g) |                      |            |       |          |                |                   |        |
| Uncontrolled Exposure/General Population              |      |                   |             |                             |                       |                  | averaged over 1 gram    |                      |            |       |          |                |                   |        |

Note: Blue entry indicates variability measurement.

|                                      |                                                                                                                                                                                                        |                              |                                 |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  <b>SAR EVALUATION REPORT</b>  |                              | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                                                                                                                                     | DUT Type:<br>Portable Tablet | Page 69 of 100                  |

**Table 10-2**  
**LTE Band 12 Body SAR**

| MEASUREMENT RESULTS                                                                               |       |      |                 |                             |                       |                  |          |                                                 |            |         |           |         |       |            |          |                |                   |        |    |
|---------------------------------------------------------------------------------------------------|-------|------|-----------------|-----------------------------|-----------------------|------------------|----------|-------------------------------------------------|------------|---------|-----------|---------|-------|------------|----------|----------------|-------------------|--------|----|
| FREQUENCY                                                                                         |       | Mode | Bandwidth [MHz] | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | MPR [dB] | Device Serial Number                            | Modulation | RB Size | RB Offset | Spacing | Side  | Duty Cycle | SAR (1g) | Scaling Factor | Reported SAR (1g) | Plot # |    |
| MHz                                                                                               | Ch.   |      |                 |                             |                       |                  |          |                                                 |            |         |           |         |       |            | (W/kg)   |                | (W/kg)            |        |    |
| 707.50                                                                                            | 23095 | Mid  | LTE Band 12     | 10                          | 25.0                  | 23.53            | -0.03    | 0                                               | 42299      | QPSK    | 1         | 0       | 16 mm | back       | 1:1      | 0.478          | 1.403             | 0.671  |    |
| 707.50                                                                                            | 23095 | Mid  | LTE Band 12     | 10                          | 24.0                  | 22.45            | -0.03    | 1                                               | 42299      | QPSK    | 25        | 0       | 16 mm | back       | 1:1      | 0.386          | 1.429             | 0.552  |    |
| 707.50                                                                                            | 23095 | Mid  | LTE Band 12     | 10                          | 25.0                  | 23.53            | -0.18    | 0                                               | 42299      | QPSK    | 1         | 0       | 16 mm | top        | 1:1      | 0.522          | 1.403             | 0.732  | A4 |
| 707.50                                                                                            | 23095 | Mid  | LTE Band 12     | 10                          | 24.0                  | 22.45            | -0.02    | 1                                               | 42299      | QPSK    | 25        | 0       | 16 mm | top        | 1:1      | 0.405          | 1.429             | 0.579  |    |
| 707.50                                                                                            | 23095 | Mid  | LTE Band 12     | 10                          | 25.0                  | 23.53            | 0.02     | 0                                               | 42299      | QPSK    | 1         | 0       | 0 mm  | right      | 1:1      | 0.134          | 1.403             | 0.188  |    |
| 707.50                                                                                            | 23095 | Mid  | LTE Band 12     | 10                          | 24.0                  | 22.45            | 0.15     | 1                                               | 42299      | QPSK    | 25        | 0       | 0 mm  | right      | 1:1      | 0.098          | 1.429             | 0.140  |    |
| 707.50                                                                                            | 23095 | Mid  | LTE Band 12     | 10                          | 25.0                  | 23.53            | -0.01    | 0                                               | 42299      | QPSK    | 1         | 0       | 0 mm  | left       | 1:1      | 0.178          | 1.403             | 0.250  |    |
| 707.50                                                                                            | 23095 | Mid  | LTE Band 12     | 10                          | 24.0                  | 22.45            | -0.02    | 1                                               | 42299      | QPSK    | 25        | 0       | 0 mm  | left       | 1:1      | 0.128          | 1.429             | 0.183  |    |
| 707.50                                                                                            | 23095 | Mid  | LTE Band 12     | 10                          | 14.0                  | 12.89            | -0.09    | 0                                               | 42299      | QPSK    | 1         | 0       | 0 mm  | back       | 1:1      | 0.398          | 1.291             | 0.514  |    |
| 707.50                                                                                            | 23095 | Mid  | LTE Band 12     | 10                          | 14.0                  | 12.96            | -0.10    | 0                                               | 42299      | QPSK    | 25        | 0       | 0 mm  | back       | 1:1      | 0.401          | 1.271             | 0.510  |    |
| 707.50                                                                                            | 23095 | Mid  | LTE Band 12     | 10                          | 14.0                  | 12.89            | -0.05    | 0                                               | 42299      | QPSK    | 1         | 0       | 0 mm  | top        | 1:1      | 0.387          | 1.291             | 0.500  |    |
| 707.50                                                                                            | 23095 | Mid  | LTE Band 12     | 10                          | 14.0                  | 12.96            | -0.05    | 0                                               | 42299      | QPSK    | 25        | 0       | 0 mm  | top        | 1:1      | 0.390          | 1.271             | 0.496  |    |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population |       |      |                 |                             |                       |                  |          | Body<br>1.6 W/kg (mW/g)<br>averaged over 1 gram |            |         |           |         |       |            |          |                |                   |        |    |

**Table 10-3**  
**LTE Band 13 Body SAR**

| MEASUREMENT RESULTS                                                                               |       |      |                 |                             |                       |                  |          |                                                 |            |         |           |         |       |            |          |                |                   |        |        |
|---------------------------------------------------------------------------------------------------|-------|------|-----------------|-----------------------------|-----------------------|------------------|----------|-------------------------------------------------|------------|---------|-----------|---------|-------|------------|----------|----------------|-------------------|--------|--------|
| FREQUENCY                                                                                         |       | Mode | Bandwidth [MHz] | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | MPR [dB] | Device Serial Number                            | Modulation | RB Size | RB Offset | Spacing | Side  | Duty Cycle | SAR (1g) | Scaling Factor | Reported SAR (1g) | Plot # |        |
| MHz                                                                                               | Ch.   |      |                 |                             |                       |                  |          |                                                 |            |         |           |         |       |            | (W/kg)   |                | (W/kg)            |        | (W/kg) |
| 782.00                                                                                            | 23230 | Mid  | LTE Band 13     | 10                          | 24.5                  | 23.78            | -0.06    | 0                                               | 42299      | QPSK    | 1         | 0       | 16 mm | back       | 1:1      | 0.725          | 1.180             | 0.856  |        |
| 782.00                                                                                            | 23230 | Mid  | LTE Band 13     | 10                          | 23.5                  | 22.77            | -0.04    | 1                                               | 42299      | QPSK    | 25        | 0       | 16 mm | back       | 1:1      | 0.582          | 1.183             | 0.689  |        |
| 782.00                                                                                            | 23230 | Mid  | LTE Band 13     | 10                          | 23.5                  | 22.72            | -0.03    | 1                                               | 42299      | QPSK    | 50        | 0       | 16 mm | back       | 1:1      | 0.573          | 1.197             | 0.686  |        |
| 782.00                                                                                            | 23230 | Mid  | LTE Band 13     | 10                          | 24.5                  | 23.78            | -0.02    | 0                                               | 42299      | QPSK    | 1         | 0       | 16 mm | top        | 1:1      | 0.905          | 1.180             | 1.068  | A5     |
| 782.00                                                                                            | 23230 | Mid  | LTE Band 13     | 10                          | 23.5                  | 22.77            | -0.01    | 1                                               | 42299      | QPSK    | 25        | 0       | 16 mm | top        | 1:1      | 0.681          | 1.183             | 0.806  |        |
| 782.00                                                                                            | 23230 | Mid  | LTE Band 13     | 10                          | 23.5                  | 22.72            | -0.06    | 1                                               | 42299      | QPSK    | 50        | 0       | 16 mm | top        | 1:1      | 0.702          | 1.197             | 0.840  |        |
| 782.00                                                                                            | 23230 | Mid  | LTE Band 13     | 10                          | 24.5                  | 23.78            | 0.10     | 0                                               | 42299      | QPSK    | 1         | 0       | 0 mm  | right      | 1:1      | 0.238          | 1.180             | 0.281  |        |
| 782.00                                                                                            | 23230 | Mid  | LTE Band 13     | 10                          | 23.5                  | 22.77            | -0.09    | 1                                               | 42299      | QPSK    | 25        | 0       | 0 mm  | right      | 1:1      | 0.163          | 1.183             | 0.193  |        |
| 782.00                                                                                            | 23230 | Mid  | LTE Band 13     | 10                          | 24.5                  | 23.78            | -0.16    | 0                                               | 42299      | QPSK    | 1         | 0       | 0 mm  | left       | 1:1      | 0.186          | 1.180             | 0.219  |        |
| 782.00                                                                                            | 23230 | Mid  | LTE Band 13     | 10                          | 23.5                  | 22.77            | -0.03    | 1                                               | 42299      | QPSK    | 25        | 0       | 0 mm  | left       | 1:1      | 0.142          | 1.183             | 0.168  |        |
| 782.00                                                                                            | 23230 | Mid  | LTE Band 13     | 10                          | 14.0                  | 13.12            | -0.06    | 0                                               | 42299      | QPSK    | 1         | 0       | 0 mm  | back       | 1:1      | 0.454          | 1.225             | 0.556  |        |
| 782.00                                                                                            | 23230 | Mid  | LTE Band 13     | 10                          | 14.0                  | 13.11            | -0.08    | 0                                               | 42299      | QPSK    | 25        | 12      | 0 mm  | back       | 1:1      | 0.454          | 1.227             | 0.557  |        |
| 782.00                                                                                            | 23230 | Mid  | LTE Band 13     | 10                          | 14.0                  | 13.12            | -0.02    | 0                                               | 42299      | QPSK    | 1         | 0       | 0 mm  | top        | 1:1      | 0.471          | 1.225             | 0.577  |        |
| 782.00                                                                                            | 23230 | Mid  | LTE Band 13     | 10                          | 14.0                  | 13.11            | -0.03    | 0                                               | 42299      | QPSK    | 25        | 12      | 0 mm  | top        | 1:1      | 0.476          | 1.227             | 0.584  |        |
| 782.00                                                                                            | 23230 | Mid  | LTE Band 13     | 10                          | 24.5                  | 23.78            | 0.07     | 0                                               | 42299      | QPSK    | 1         | 0       | 16 mm | top        | 1:1      | 0.888          | 1.180             | 1.048  |        |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population |       |      |                 |                             |                       |                  |          | Body<br>1.6 W/kg (mW/g)<br>averaged over 1 gram |            |         |           |         |       |            |          |                |                   |        |        |

Note: Blue entry indicates variability measurement.

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | SAR EVALUATION REPORT        |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 70 of 100                  |



**Table 10-4**  
**LTE Band 26 (Cell) Body SAR**

| MEASUREMENT RESULTS                                   |       |      |                    |                             |                       |                  |          |                         |            |         |           |         |       |            |          |                |                   |        |    |
|-------------------------------------------------------|-------|------|--------------------|-----------------------------|-----------------------|------------------|----------|-------------------------|------------|---------|-----------|---------|-------|------------|----------|----------------|-------------------|--------|----|
| FREQUENCY                                             |       | Mode | Bandwidth [MHz]    | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | MPR [dB] | Device Serial Number    | Modulation | RB Size | RB Offset | Spacing | Side  | Duty Cycle | SAR (1g) | Scaling Factor | Reported SAR (1g) | Plot # |    |
| MHz                                                   | Ch.   |      |                    |                             |                       |                  |          |                         |            |         |           |         |       |            | (W/kg)   |                | (W/kg)            |        |    |
| 831.50                                                | 26865 | Mid  | LTE Band 26 (Cell) | 15                          | 24.5                  | 23.76            | -0.04    | 0                       | 42299      | QPSK    | 1         | 0       | 16 mm | back       | 1:1      | 0.872          | 1.186             | 1.034  |    |
| 831.50                                                | 26865 | Mid  | LTE Band 26 (Cell) | 15                          | 23.5                  | 22.79            | -0.01    | 1                       | 42299      | QPSK    | 36        | 18      | 16 mm | back       | 1:1      | 0.681          | 1.178             | 0.802  |    |
| 831.50                                                | 26865 | Mid  | LTE Band 26 (Cell) | 15                          | 23.5                  | 22.71            | 0.03     | 1                       | 42299      | QPSK    | 75        | 0       | 16 mm | back       | 1:1      | 0.672          | 1.199             | 0.806  |    |
| 831.50                                                | 26865 | Mid  | LTE Band 26 (Cell) | 15                          | 24.5                  | 23.76            | -0.01    | 0                       | 42299      | QPSK    | 1         | 0       | 16 mm | top        | 1:1      | 1.140          | 1.186             | 1.352  | A6 |
| 831.50                                                | 26865 | Mid  | LTE Band 26 (Cell) | 15                          | 23.5                  | 22.79            | -0.02    | 1                       | 42299      | QPSK    | 36        | 18      | 16 mm | top        | 1:1      | 0.882          | 1.178             | 1.039  |    |
| 831.50                                                | 26865 | Mid  | LTE Band 26 (Cell) | 15                          | 23.5                  | 22.71            | -0.03    | 1                       | 42299      | QPSK    | 75        | 0       | 16 mm | top        | 1:1      | 0.865          | 1.199             | 1.037  |    |
| 831.50                                                | 26865 | Mid  | LTE Band 26 (Cell) | 15                          | 24.5                  | 23.76            | 0.01     | 0                       | 42299      | QPSK    | 1         | 0       | 0 mm  | right      | 1:1      | 0.213          | 1.186             | 0.253  |    |
| 831.50                                                | 26865 | Mid  | LTE Band 26 (Cell) | 15                          | 23.5                  | 22.79            | -0.08    | 1                       | 42299      | QPSK    | 36        | 18      | 0 mm  | right      | 1:1      | 0.167          | 1.178             | 0.197  |    |
| 831.50                                                | 26865 | Mid  | LTE Band 26 (Cell) | 15                          | 24.5                  | 23.76            | -0.07    | 0                       | 42299      | QPSK    | 1         | 0       | 0 mm  | left       | 1:1      | 0.124          | 1.186             | 0.147  |    |
| 831.50                                                | 26865 | Mid  | LTE Band 26 (Cell) | 15                          | 23.5                  | 22.79            | -0.04    | 1                       | 42299      | QPSK    | 36        | 18      | 0 mm  | left       | 1:1      | 0.084          | 1.178             | 0.099  |    |
| 831.50                                                | 26865 | Mid  | LTE Band 26 (Cell) | 15                          | 14.0                  | 13.12            | -0.12    | 0                       | 42299      | QPSK    | 1         | 0       | 0 mm  | back       | 1:1      | 0.447          | 1.225             | 0.548  |    |
| 831.50                                                | 26865 | Mid  | LTE Band 26 (Cell) | 15                          | 14.0                  | 13.17            | -0.10    | 0                       | 42299      | QPSK    | 36        | 18      | 0 mm  | back       | 1:1      | 0.441          | 1.211             | 0.534  |    |
| 831.50                                                | 26865 | Mid  | LTE Band 26 (Cell) | 15                          | 14.0                  | 13.12            | -0.06    | 0                       | 42299      | QPSK    | 1         | 0       | 0 mm  | top        | 1:1      | 0.488          | 1.225             | 0.598  |    |
| 831.50                                                | 26865 | Mid  | LTE Band 26 (Cell) | 15                          | 14.0                  | 13.17            | -0.06    | 0                       | 42299      | QPSK    | 36        | 18      | 0 mm  | top        | 1:1      | 0.487          | 1.211             | 0.590  |    |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT<br>Spatial Peak |       |      |                    |                             |                       |                  |          | Body<br>1.6 W/kg (mW/g) |            |         |           |         |       |            |          |                |                   |        |    |
| Uncontrolled Exposure/General Population              |       |      |                    |                             |                       |                  |          | averaged over 1 gram    |            |         |           |         |       |            |          |                |                   |        |    |

**Table 10-5**  
**LTE Band 5 (Cell) Body SAR**

| MEASUREMENT RESULTS                                                                               |       |      |                   |                             |                       |                  |          |                                                 |            |         |           |         |       |            |          |                |                   |        |    |
|---------------------------------------------------------------------------------------------------|-------|------|-------------------|-----------------------------|-----------------------|------------------|----------|-------------------------------------------------|------------|---------|-----------|---------|-------|------------|----------|----------------|-------------------|--------|----|
| FREQUENCY                                                                                         |       | Mode | Bandwidth [MHz]   | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | MPR [dB] | Device Serial Number                            | Modulation | RB Size | RB Offset | Spacing | Side  | Duty Cycle | SAR (1g) | Scaling Factor | Reported SAR (1g) | Plot # |    |
| MHz                                                                                               | Ch.   |      |                   |                             |                       |                  |          |                                                 |            |         |           |         |       |            | (W/kg)   |                | (W/kg)            |        |    |
| 836.50                                                                                            | 20525 | Mid  | LTE Band 5 (Cell) | 10                          | 25.0                  | 23.96            | -0.04    | 0                                               | 42299      | QPSK    | 1         | 0       | 16 mm | back       | 1:1      | 0.836          | 1.271             | 1.063  |    |
| 836.50                                                                                            | 20525 | Mid  | LTE Band 5 (Cell) | 10                          | 24.0                  | 22.75            | -0.04    | 1                                               | 42299      | QPSK    | 25        | 0       | 16 mm | back       | 1:1      | 0.666          | 1.334             | 0.888  |    |
| 836.50                                                                                            | 20525 | Mid  | LTE Band 5 (Cell) | 10                          | 24.0                  | 22.71            | 0.02     | 1                                               | 42299      | QPSK    | 50        | 0       | 16 mm | back       | 1:1      | 0.657          | 1.346             | 0.884  |    |
| 836.50                                                                                            | 20525 | Mid  | LTE Band 5 (Cell) | 10                          | 25.0                  | 23.96            | 0.02     | 0                                               | 42299      | QPSK    | 1         | 0       | 16 mm | top        | 1:1      | 1.100          | 1.271             | 1.398  | A7 |
| 836.50                                                                                            | 20525 | Mid  | LTE Band 5 (Cell) | 10                          | 24.0                  | 22.75            | -0.05    | 1                                               | 42299      | QPSK    | 25        | 0       | 16 mm | top        | 1:1      | 0.848          | 1.334             | 1.131  |    |
| 836.50                                                                                            | 20525 | Mid  | LTE Band 5 (Cell) | 10                          | 24.0                  | 22.71            | -0.02    | 1                                               | 42299      | QPSK    | 50        | 0       | 16 mm | top        | 1:1      | 0.832          | 1.346             | 1.120  |    |
| 836.50                                                                                            | 20525 | Mid  | LTE Band 5 (Cell) | 10                          | 25.0                  | 23.96            | 0.04     | 0                                               | 42299      | QPSK    | 1         | 0       | 0 mm  | right      | 1:1      | 0.227          | 1.271             | 0.289  |    |
| 836.50                                                                                            | 20525 | Mid  | LTE Band 5 (Cell) | 10                          | 24.0                  | 22.75            | 0.01     | 1                                               | 42299      | QPSK    | 25        | 0       | 0 mm  | right      | 1:1      | 0.164          | 1.334             | 0.219  |    |
| 836.50                                                                                            | 20525 | Mid  | LTE Band 5 (Cell) | 10                          | 25.0                  | 23.96            | -0.11    | 0                                               | 42299      | QPSK    | 1         | 0       | 0 mm  | left       | 1:1      | 0.148          | 1.271             | 0.188  |    |
| 836.50                                                                                            | 20525 | Mid  | LTE Band 5 (Cell) | 10                          | 24.0                  | 22.75            | -0.01    | 1                                               | 42299      | QPSK    | 25        | 0       | 0 mm  | left       | 1:1      | 0.114          | 1.334             | 0.152  |    |
| 836.50                                                                                            | 20525 | Mid  | LTE Band 5 (Cell) | 10                          | 16.0                  | 15.10            | -0.12    | 0                                               | 42299      | QPSK    | 1         | 0       | 0 mm  | back       | 1:1      | 0.693          | 1.230             | 0.852  |    |
| 836.50                                                                                            | 20525 | Mid  | LTE Band 5 (Cell) | 10                          | 16.0                  | 15.13            | -0.11    | 0                                               | 42299      | QPSK    | 25        | 0       | 0 mm  | back       | 1:1      | 0.691          | 1.222             | 0.844  |    |
| 836.50                                                                                            | 20525 | Mid  | LTE Band 5 (Cell) | 10                          | 16.0                  | 15.06            | -0.10    | 0                                               | 42299      | QPSK    | 50        | 0       | 0 mm  | back       | 1:1      | 0.682          | 1.242             | 0.847  |    |
| 836.50                                                                                            | 20525 | Mid  | LTE Band 5 (Cell) | 10                          | 16.0                  | 15.10            | -0.04    | 0                                               | 42299      | QPSK    | 1         | 0       | 0 mm  | top        | 1:1      | 0.761          | 1.230             | 0.936  |    |
| 836.50                                                                                            | 20525 | Mid  | LTE Band 5 (Cell) | 10                          | 16.0                  | 15.13            | -0.06    | 0                                               | 42299      | QPSK    | 25        | 0       | 0 mm  | top        | 1:1      | 0.762          | 1.222             | 0.931  |    |
| 836.50                                                                                            | 20525 | Mid  | LTE Band 5 (Cell) | 10                          | 16.0                  | 15.06            | -0.06    | 0                                               | 42299      | QPSK    | 50        | 0       | 0 mm  | top        | 1:1      | 0.756          | 1.242             | 0.939  |    |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population |       |      |                   |                             |                       |                  |          | Body<br>1.6 W/kg (mW/g)<br>averaged over 1 gram |            |         |           |         |       |            |          |                |                   |        |    |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | SAR EVALUATION REPORT        |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 71 of 100                  |



**Table 10-6**  
**LTE Band 4 (AWS) Body SAR**

| MEASUREMENT RESULTS                      |       |      |                  |                             |                       |                  |          |                      |            |         |           |         |       |            |          |                |                   |        |    |
|------------------------------------------|-------|------|------------------|-----------------------------|-----------------------|------------------|----------|----------------------|------------|---------|-----------|---------|-------|------------|----------|----------------|-------------------|--------|----|
| FREQUENCY                                |       | Mode | Bandwidth [MHz]  | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | MPR [dB] | Device Serial Number | Modulation | RB Size | RB Offset | Spacing | Side  | Duty Cycle | SAR (1g) | Scaling Factor | Reported SAR (1g) | Plot # |    |
| MHz                                      | Ch.   |      |                  |                             |                       |                  |          |                      |            |         |           |         |       |            | (W/kg)   |                | (W/kg)            |        |    |
| 1732.50                                  | 20175 | Mid  | LTE Band 4 (AWS) | 20                          | 25.0                  | 24.06            | 0.02     | 0                    | 42299      | QPSK    | 1         | 0       | 16 mm | back       | 1:1      | 0.547          | 1.242             | 0.679  |    |
| 1732.50                                  | 20175 | Mid  | LTE Band 4 (AWS) | 20                          | 24.0                  | 23.01            | -0.01    | 1                    | 42299      | QPSK    | 50        | 0       | 16 mm | back       | 1:1      | 0.422          | 1.256             | 0.530  |    |
| 1732.50                                  | 20175 | Mid  | LTE Band 4 (AWS) | 20                          | 25.0                  | 24.06            | -0.03    | 0                    | 42299      | QPSK    | 1         | 0       | 16 mm | top        | 1:1      | 0.650          | 1.242             | 0.807  |    |
| 1732.50                                  | 20175 | Mid  | LTE Band 4 (AWS) | 20                          | 24.0                  | 23.01            | -0.03    | 1                    | 42299      | QPSK    | 50        | 0       | 16 mm | top        | 1:1      | 0.504          | 1.256             | 0.633  |    |
| 1732.50                                  | 20175 | Mid  | LTE Band 4 (AWS) | 20                          | 24.0                  | 22.94            | 0.07     | 1                    | 42299      | QPSK    | 100       | 0       | 16 mm | top        | 1:1      | 0.500          | 1.276             | 0.638  |    |
| 1732.50                                  | 20175 | Mid  | LTE Band 4 (AWS) | 20                          | 25.0                  | 24.06            | -0.20    | 0                    | 42299      | QPSK    | 1         | 0       | 0 mm  | right      | 1:1      | 1.100          | 1.242             | 1.366  | A8 |
| 1732.50                                  | 20175 | Mid  | LTE Band 4 (AWS) | 20                          | 24.0                  | 23.01            | -0.10    | 1                    | 42299      | QPSK    | 50        | 0       | 0 mm  | right      | 1:1      | 0.857          | 1.256             | 1.076  |    |
| 1732.50                                  | 20175 | Mid  | LTE Band 4 (AWS) | 20                          | 24.0                  | 22.94            | -0.12    | 1                    | 42299      | QPSK    | 100       | 0       | 0 mm  | right      | 1:1      | 0.848          | 1.276             | 1.082  |    |
| 1732.50                                  | 20175 | Mid  | LTE Band 4 (AWS) | 20                          | 25.0                  | 24.06            | -0.05    | 0                    | 42299      | QPSK    | 1         | 0       | 0 mm  | left       | 1:1      | 0.448          | 1.242             | 0.556  |    |
| 1732.50                                  | 20175 | Mid  | LTE Band 4 (AWS) | 20                          | 24.0                  | 23.01            | -0.01    | 1                    | 42299      | QPSK    | 50        | 0       | 0 mm  | left       | 1:1      | 0.332          | 1.256             | 0.417  |    |
| 1732.50                                  | 20175 | Mid  | LTE Band 4 (AWS) | 20                          | 13.0                  | 12.01            | 0.01     | 0                    | 42299      | QPSK    | 1         | 0       | 0 mm  | back       | 1:1      | 0.852          | 1.256             | 1.070  |    |
| 1732.50                                  | 20175 | Mid  | LTE Band 4 (AWS) | 20                          | 13.0                  | 11.95            | 0.04     | 0                    | 42299      | QPSK    | 50        | 0       | 0 mm  | back       | 1:1      | 0.859          | 1.274             | 1.094  |    |
| 1732.50                                  | 20175 | Mid  | LTE Band 4 (AWS) | 20                          | 13.0                  | 11.86            | 0.05     | 0                    | 42299      | QPSK    | 100       | 0       | 0 mm  | back       | 1:1      | 0.859          | 1.300             | 1.117  |    |
| 1732.50                                  | 20175 | Mid  | LTE Band 4 (AWS) | 20                          | 13.0                  | 12.01            | -0.08    | 0                    | 42299      | QPSK    | 1         | 0       | 0 mm  | top        | 1:1      | 0.845          | 1.256             | 1.061  |    |
| 1732.50                                  | 20175 | Mid  | LTE Band 4 (AWS) | 20                          | 13.0                  | 11.95            | -0.08    | 0                    | 42299      | QPSK    | 50        | 0       | 0 mm  | top        | 1:1      | 0.840          | 1.274             | 1.070  |    |
| 1732.50                                  | 20175 | Mid  | LTE Band 4 (AWS) | 20                          | 13.0                  | 11.86            | -0.09    | 0                    | 42299      | QPSK    | 100       | 0       | 0 mm  | top        | 1:1      | 0.823          | 1.300             | 1.070  |    |
| 1732.50                                  | 20175 | Mid  | LTE Band 4 (AWS) | 20                          | 25.0                  | 24.06            | -0.08    | 0                    | 42299      | QPSK    | 1         | 0       | 0 mm  | right      | 1:1      | 1.100          | 1.242             | 1.366  |    |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT    |       |      |                  |                             |                       |                  |          | Body                 |            |         |           |         |       |            |          |                |                   |        |    |
| Spatial Peak                             |       |      |                  |                             |                       |                  |          | 1.6 W/kg (mW/g)      |            |         |           |         |       |            |          |                |                   |        |    |
| Uncontrolled Exposure/General Population |       |      |                  |                             |                       |                  |          | averaged over 1 gram |            |         |           |         |       |            |          |                |                   |        |    |

Note: Blue entry indicates variability measurement.

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | SAR EVALUATION REPORT        |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 72 of 100                  |

**Table 10-7**  
**LTE Band 25 (PCS) Body SAR**

| MEASUREMENT RESULTS                                                                               |       |        |                   |                 |                             |                       |                  |                                                 |                      |            |         |           |         |       |            |          |                |                   |        |
|---------------------------------------------------------------------------------------------------|-------|--------|-------------------|-----------------|-----------------------------|-----------------------|------------------|-------------------------------------------------|----------------------|------------|---------|-----------|---------|-------|------------|----------|----------------|-------------------|--------|
| FREQUENCY                                                                                         |       |        | Mode              | Bandwidth [MHz] | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | MPR [dB]                                        | Device Serial Number | Modulation | RB Size | RB Offset | Spacing | Side  | Duty Cycle | SAR (1g) | Scaling Factor | Reported SAR (1g) | Plot # |
| MHz                                                                                               | Ch.   | (W/kg) |                   |                 |                             |                       |                  |                                                 |                      |            |         |           |         |       |            | (W/kg)   |                |                   |        |
| 1905.00                                                                                           | 26590 | High   | LTE Band 25 (PCS) | 20              | 25.0                        | 24.41                 | 0.00             | 0                                               | 42158                | QPSK       | 1       | 0         | 16 mm   | back  | 1:1        | 0.678    | 1.146          | 0.777             |        |
| 1905.00                                                                                           | 26590 | High   | LTE Band 25 (PCS) | 20              | 24.0                        | 23.37                 | -0.01            | 1                                               | 42158                | QPSK       | 50      | 0         | 16 mm   | back  | 1:1        | 0.529    | 1.156          | 0.612             |        |
| 1905.00                                                                                           | 26590 | High   | LTE Band 25 (PCS) | 20              | 25.0                        | 24.41                 | 0.00             | 0                                               | 42158                | QPSK       | 1       | 0         | 16 mm   | top   | 1:1        | 0.443    | 1.146          | 0.508             |        |
| 1905.00                                                                                           | 26590 | High   | LTE Band 25 (PCS) | 20              | 24.0                        | 23.37                 | -0.05            | 1                                               | 42158                | QPSK       | 50      | 0         | 16 mm   | top   | 1:1        | 0.359    | 1.156          | 0.415             |        |
| 1905.00                                                                                           | 26590 | High   | LTE Band 25 (PCS) | 20              | 25.0                        | 24.41                 | -0.01            | 0                                               | 42158                | QPSK       | 1       | 0         | 0 mm    | right | 1:1        | 0.339    | 1.146          | 0.388             |        |
| 1905.00                                                                                           | 26590 | High   | LTE Band 25 (PCS) | 20              | 24.0                        | 23.37                 | -0.05            | 1                                               | 42158                | QPSK       | 50      | 0         | 0 mm    | right | 1:1        | 0.271    | 1.156          | 0.313             |        |
| 1905.00                                                                                           | 26590 | High   | LTE Band 25 (PCS) | 20              | 25.0                        | 24.41                 | 0.01             | 0                                               | 42158                | QPSK       | 1       | 0         | 0 mm    | left  | 1:1        | 0.247    | 1.146          | 0.283             |        |
| 1905.00                                                                                           | 26590 | High   | LTE Band 25 (PCS) | 20              | 24.0                        | 23.37                 | 0.04             | 1                                               | 42158                | QPSK       | 50      | 0         | 0 mm    | left  | 1:1        | 0.182    | 1.156          | 0.210             |        |
| 1860.00                                                                                           | 26140 | Low    | LTE Band 25 (PCS) | 20              | 14.0                        | 13.11                 | -0.04            | 0                                               | 42158                | QPSK       | 1       | 0         | 0 mm    | back  | 1:1        | 0.861    | 1.227          | 1.056             |        |
| 1882.50                                                                                           | 26365 | Mid    | LTE Band 25 (PCS) | 20              | 14.0                        | 12.88                 | -0.05            | 0                                               | 42158                | QPSK       | 1       | 0         | 0 mm    | back  | 1:1        | 0.854    | 1.294          | 1.105             |        |
| 1905.00                                                                                           | 26590 | High   | LTE Band 25 (PCS) | 20              | 14.0                        | 13.35                 | -0.07            | 0                                               | 42158                | QPSK       | 1       | 0         | 0 mm    | back  | 1:1        | 0.956    | 1.161          | 1.110             |        |
| 1860.00                                                                                           | 26140 | Low    | LTE Band 25 (PCS) | 20              | 14.0                        | 13.06                 | -0.07            | 0                                               | 42158                | QPSK       | 50      | 0         | 0 mm    | back  | 1:1        | 0.860    | 1.242          | 1.068             |        |
| 1882.50                                                                                           | 26365 | Mid    | LTE Band 25 (PCS) | 20              | 14.0                        | 12.80                 | -0.06            | 0                                               | 42158                | QPSK       | 50      | 0         | 0 mm    | back  | 1:1        | 0.854    | 1.318          | 1.126             |        |
| 1905.00                                                                                           | 26590 | High   | LTE Band 25 (PCS) | 20              | 14.0                        | 13.32                 | -0.08            | 0                                               | 42158                | QPSK       | 50      | 0         | 0 mm    | back  | 1:1        | 0.971    | 1.169          | 1.135             |        |
| 1905.00                                                                                           | 26590 | High   | LTE Band 25 (PCS) | 20              | 14.0                        | 13.25                 | -0.15            | 0                                               | 42158                | QPSK       | 100     | 0         | 0 mm    | back  | 1:1        | 0.961    | 1.189          | 1.143             |        |
| 1860.00                                                                                           | 26140 | Low    | LTE Band 25 (PCS) | 20              | 14.0                        | 13.11                 | -0.02            | 0                                               | 42158                | QPSK       | 1       | 0         | 0 mm    | top   | 1:1        | 0.590    | 1.227          | 0.724             |        |
| 1882.50                                                                                           | 26365 | Mid    | LTE Band 25 (PCS) | 20              | 14.0                        | 12.88                 | -0.04            | 0                                               | 42158                | QPSK       | 1       | 0         | 0 mm    | top   | 1:1        | 0.641    | 1.294          | 0.829             |        |
| 1905.00                                                                                           | 26590 | High   | LTE Band 25 (PCS) | 20              | 14.0                        | 13.35                 | -0.14            | 0                                               | 42158                | QPSK       | 1       | 0         | 0 mm    | top   | 1:1        | 0.765    | 1.161          | 0.888             |        |
| 1860.00                                                                                           | 26140 | Low    | LTE Band 25 (PCS) | 20              | 14.0                        | 13.06                 | -0.01            | 0                                               | 42158                | QPSK       | 50      | 0         | 0 mm    | top   | 1:1        | 0.598    | 1.242          | 0.743             |        |
| 1882.50                                                                                           | 26365 | Mid    | LTE Band 25 (PCS) | 20              | 14.0                        | 12.80                 | -0.04            | 0                                               | 42158                | QPSK       | 50      | 0         | 0 mm    | top   | 1:1        | 0.665    | 1.318          | 0.876             |        |
| 1905.00                                                                                           | 26590 | High   | LTE Band 25 (PCS) | 20              | 14.0                        | 13.32                 | -0.04            | 0                                               | 42158                | QPSK       | 50      | 0         | 0 mm    | top   | 1:1        | 0.798    | 1.169          | 0.933             |        |
| 1905.00                                                                                           | 26590 | High   | LTE Band 25 (PCS) | 20              | 14.0                        | 13.25                 | -0.06            | 0                                               | 42158                | QPSK       | 100     | 0         | 0 mm    | top   | 1:1        | 0.790    | 1.189          | 0.939             |        |
| 1905.00                                                                                           | 26590 | High   | LTE Band 25 (PCS) | 20              | 14.0                        | 13.32                 | 0.03             | 0                                               | 42158                | QPSK       | 50      | 0         | 0 mm    | back  | 1:1        | 1.010    | 1.169          | 1.181             | A9     |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population |       |        |                   |                 |                             |                       |                  | Body<br>1.6 W/kg (mW/g)<br>averaged over 1 gram |                      |            |         |           |         |       |            |          |                |                   |        |

Note: Blue entry indicates variability measurement.

**Table 10-8**  
**LTE Band 7 Body SAR**

| MEASUREMENT RESULTS                                                                               |       |      |                 |                             |                       |                  |          |                                                 |            |         |           |         |       |            |                 |                |                   |        |     |
|---------------------------------------------------------------------------------------------------|-------|------|-----------------|-----------------------------|-----------------------|------------------|----------|-------------------------------------------------|------------|---------|-----------|---------|-------|------------|-----------------|----------------|-------------------|--------|-----|
| FREQUENCY                                                                                         |       | Mode | Bandwidth [MHz] | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | MPR [dB] | Device Serial Number                            | Modulation | RB Size | RB Offset | Spacing | Side  | Duty Cycle | SAR (1g) (W/kg) | Scaling Factor | Reported SAR (1g) | Plot # |     |
| MHz                                                                                               | Ch.   |      |                 |                             |                       |                  |          |                                                 |            |         |           |         |       |            |                 |                | (W/kg)            |        |     |
| 2535.00                                                                                           | 21100 | Mid  | LTE Band 7      | 20                          | 25.0                  | 24.63            | -0.04    | 0                                               | 42133      | QPSK    | 1         | 0       | 16 mm | back       | 1:1             | 0.658          | 1.089             | 0.717  |     |
| 2535.00                                                                                           | 21100 | Mid  | LTE Band 7      | 20                          | 24.0                  | 23.58            | -0.02    | 1                                               | 42133      | QPSK    | 50        | 0       | 16 mm | back       | 1:1             | 0.521          | 1.102             | 0.574  |     |
| 2535.00                                                                                           | 21100 | Mid  | LTE Band 7      | 20                          | 25.0                  | 24.63            | 0.01     | 0                                               | 42133      | QPSK    | 1         | 0       | 16 mm | top        | 1:1             | 0.529          | 1.089             | 0.576  |     |
| 2535.00                                                                                           | 21100 | Mid  | LTE Band 7      | 20                          | 24.0                  | 23.58            | 0.00     | 1                                               | 42133      | QPSK    | 50        | 0       | 16 mm | top        | 1:1             | 0.416          | 1.102             | 0.458  |     |
| 2535.00                                                                                           | 21100 | Mid  | LTE Band 7      | 20                          | 25.0                  | 24.63            | -0.02    | 0                                               | 42133      | QPSK    | 1         | 0       | 0 mm  | right      | 1:1             | 0.424          | 1.089             | 0.462  |     |
| 2535.00                                                                                           | 21100 | Mid  | LTE Band 7      | 20                          | 24.0                  | 23.58            | -0.06    | 1                                               | 42133      | QPSK    | 50        | 0       | 0 mm  | right      | 1:1             | 0.365          | 1.102             | 0.402  |     |
| 2535.00                                                                                           | 21100 | Mid  | LTE Band 7      | 20                          | 25.0                  | 24.63            | 0.05     | 0                                               | 42133      | QPSK    | 1         | 0       | 0 mm  | left       | 1:1             | 0.225          | 1.089             | 0.245  |     |
| 2535.00                                                                                           | 21100 | Mid  | LTE Band 7      | 20                          | 24.0                  | 23.58            | 0.03     | 1                                               | 42133      | QPSK    | 50        | 0       | 0 mm  | left       | 1:1             | 0.165          | 1.102             | 0.182  |     |
| 2510.00                                                                                           | 20850 | Low  | LTE Band 7      | 20                          | 13.0                  | 12.40            | 0.13     | 0                                               | 42133      | QPSK    | 1         | 0       | 0 mm  | back       | 1:1             | 0.705          | 1.148             | 0.809  |     |
| 2535.00                                                                                           | 21100 | Mid  | LTE Band 7      | 20                          | 13.0                  | 12.48            | -0.17    | 0                                               | 42133      | QPSK    | 1         | 0       | 0 mm  | back       | 1:1             | 0.767          | 1.127             | 0.864  | A10 |
| 2560.00                                                                                           | 21350 | High | LTE Band 7      | 20                          | 13.0                  | 12.25            | 0.15     | 0                                               | 42133      | QPSK    | 1         | 0       | 0 mm  | back       | 1:1             | 0.745          | 1.189             | 0.886  |     |
| 2510.00                                                                                           | 20850 | Low  | LTE Band 7      | 20                          | 13.0                  | 12.30            | 0.21     | 0                                               | 42133      | QPSK    | 50        | 0       | 0 mm  | back       | 1:1             | 0.681          | 1.175             | 0.800  |     |
| 2535.00                                                                                           | 21100 | Mid  | LTE Band 7      | 20                          | 13.0                  | 12.39            | 0.19     | 0                                               | 42133      | QPSK    | 50        | 0       | 0 mm  | back       | 1:1             | 0.747          | 1.151             | 0.860  |     |
| 2560.00                                                                                           | 21350 | High | LTE Band 7      | 20                          | 13.0                  | 12.16            | 0.19     | 0                                               | 42133      | QPSK    | 50        | 0       | 0 mm  | back       | 1:1             | 0.749          | 1.213             | 0.909  |     |
| 2535.00                                                                                           | 21100 | Mid  | LTE Band 7      | 20                          | 13.0                  | 12.35            | 0.19     | 0                                               | 42133      | QPSK    | 100       | 0       | 0 mm  | back       | 1:1             | 0.739          | 1.161             | 0.858  |     |
| 2535.00                                                                                           | 21100 | Mid  | LTE Band 7      | 20                          | 13.0                  | 12.48            | -0.16    | 0                                               | 42133      | QPSK    | 1         | 0       | 0 mm  | top        | 1:1             | 0.484          | 1.127             | 0.545  |     |
| 2535.00                                                                                           | 21100 | Mid  | LTE Band 7      | 20                          | 13.0                  | 12.39            | -0.14    | 0                                               | 42133      | QPSK    | 50        | 0       | 0 mm  | top        | 1:1             | 0.491          | 1.151             | 0.565  |     |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population |       |      |                 |                             |                       |                  |          | Body<br>1.6 W/kg (mW/g)<br>averaged over 1 gram |            |         |           |         |       |            |                 |                |                   |        |     |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | <b>SAR EVALUATION REPORT</b> |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 73 of 100                  |

**Table 10-9**  
**LTE Band 41 Body SAR**

| MEASUREMENT RESULTS                      |                   |           |       |          |                 |                             |                       |                  |          |                      |            |         |           |         |       |            |          |                |                   |        |     |
|------------------------------------------|-------------------|-----------|-------|----------|-----------------|-----------------------------|-----------------------|------------------|----------|----------------------|------------|---------|-----------|---------|-------|------------|----------|----------------|-------------------|--------|-----|
| 1 CC Uplink   2 CC Uplink                | Component Carrier | FREQUENCY |       | Mode     | Bandwidth [MHz] | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | MPR [dB] | Device Serial Number | Modulation | RB Size | RB Offset | Spacing | Side  | Duty Cycle | SAR (1g) | Scaling Factor | Reported SAR (1g) | Plot # |     |
|                                          |                   | MHz       | Ch.   |          |                 |                             |                       |                  |          |                      |            |         |           |         |       |            | (W/kg)   |                | (W/kg)            |        |     |
| 1 CC Uplink - Power Class 3              | N/A               | 2593.00   | 40620 | Mid      | LTE Band 41     | 20                          | 25.0                  | 24.93            | 0.01     | 0                    | 42125      | QPSK    | 1         | 0       | 16 mm | back       | 1:1.58   | 0.499          | 1.016             | 0.507  |     |
| 1 CC Uplink - Power Class 3              | N/A               | 2593.00   | 40620 | Mid      | LTE Band 41     | 20                          | 24.0                  | 23.87            | -0.08    | 1                    | 42125      | QPSK    | 50        | 0       | 16 mm | back       | 1:1.58   | 0.354          | 1.030             | 0.365  |     |
| 1 CC Uplink - Power Class 3              | N/A               | 2593.00   | 40620 | Mid      | LTE Band 41     | 20                          | 25.0                  | 24.93            | 0.01     | 0                    | 42125      | QPSK    | 1         | 0       | 16 mm | top        | 1:1.58   | 0.348          | 1.016             | 0.354  |     |
| 1 CC Uplink - Power Class 3              | N/A               | 2593.00   | 40620 | Mid      | LTE Band 41     | 20                          | 24.0                  | 23.87            | 0.00     | 1                    | 42125      | QPSK    | 50        | 0       | 16 mm | top        | 1:1.58   | 0.278          | 1.030             | 0.286  |     |
| 1 CC Uplink - Power Class 3              | N/A               | 2593.00   | 40620 | Mid      | LTE Band 41     | 20                          | 25.0                  | 24.93            | -0.07    | 0                    | 42125      | QPSK    | 1         | 0       | 0 mm  | right      | 1:1.58   | 0.360          | 1.016             | 0.366  |     |
| 1 CC Uplink - Power Class 3              | N/A               | 2593.00   | 40620 | Mid      | LTE Band 41     | 20                          | 24.0                  | 23.87            | 0.20     | 1                    | 42125      | QPSK    | 50        | 0       | 0 mm  | right      | 1:1.58   | 0.307          | 1.030             | 0.316  |     |
| 1 CC Uplink - Power Class 3              | N/A               | 2593.00   | 40620 | Mid      | LTE Band 41     | 20                          | 25.0                  | 24.93            | -0.01    | 0                    | 42125      | QPSK    | 1         | 0       | 0 mm  | left       | 1:1.58   | 0.135          | 1.016             | 0.137  |     |
| 1 CC Uplink - Power Class 3              | N/A               | 2593.00   | 40620 | Mid      | LTE Band 41     | 20                          | 24.0                  | 23.87            | 0.06     | 1                    | 42125      | QPSK    | 50        | 0       | 0 mm  | left       | 1:1.58   | 0.101          | 1.030             | 0.104  |     |
| 1 CC Uplink - Power Class 3              | N/A               | 2506.00   | 39750 | Low      | LTE Band 41     | 20                          | 15.0                  | 14.02            | 0.20     | 0                    | 13589      | QPSK    | 1         | 0       | 0 mm  | back       | 1:1.58   | 0.802          | 1.253             | 1.005  |     |
| 1 CC Uplink - Power Class 3              | N/A               | 2549.50   | 40185 | Low-Mid  | LTE Band 41     | 20                          | 15.0                  | 14.27            | 0.15     | 0                    | 13589      | QPSK    | 1         | 50      | 0 mm  | back       | 1:1.58   | 0.830          | 1.183             | 0.982  |     |
| 1 CC Uplink - Power Class 3              | N/A               | 2593.00   | 40620 | Mid      | LTE Band 41     | 20                          | 15.0                  | 14.60            | 0.14     | 0                    | 13589      | QPSK    | 1         | 0       | 0 mm  | back       | 1:1.58   | 0.851          | 1.096             | 0.933  |     |
| 1 CC Uplink - Power Class 3              | N/A               | 2636.50   | 41055 | Mid-High | LTE Band 41     | 20                          | 15.0                  | 14.35            | 0.10     | 0                    | 13589      | QPSK    | 1         | 0       | 0 mm  | back       | 1:1.58   | 0.854          | 1.161             | 0.991  |     |
| 1 CC Uplink - Power Class 3              | N/A               | 2680.00   | 41490 | High     | LTE Band 41     | 20                          | 15.0                  | 13.95            | 0.12     | 0                    | 13589      | QPSK    | 1         | 0       | 0 mm  | back       | 1:1.58   | 0.840          | 1.274             | 1.070  |     |
| 1 CC Uplink - Power Class 3              | N/A               | 2506.00   | 39750 | Low      | LTE Band 41     | 20                          | 15.0                  | 14.01            | 0.14     | 0                    | 13589      | QPSK    | 50        | 0       | 0 mm  | back       | 1:1.58   | 0.823          | 1.256             | 1.034  |     |
| 1 CC Uplink - Power Class 3              | N/A               | 2549.50   | 40185 | Low-Mid  | LTE Band 41     | 20                          | 15.0                  | 14.25            | 0.13     | 0                    | 13589      | QPSK    | 50        | 0       | 0 mm  | back       | 1:1.58   | 0.822          | 1.189             | 0.977  |     |
| 1 CC Uplink - Power Class 3              | N/A               | 2593.00   | 40620 | Mid      | LTE Band 41     | 20                          | 15.0                  | 14.61            | 0.16     | 0                    | 13589      | QPSK    | 50        | 0       | 0 mm  | back       | 1:1.58   | 0.851          | 1.094             | 0.931  |     |
| 1 CC Uplink - Power Class 3              | N/A               | 2636.50   | 41055 | Mid-High | LTE Band 41     | 20                          | 15.0                  | 14.32            | 0.15     | 0                    | 13589      | QPSK    | 50        | 0       | 0 mm  | back       | 1:1.58   | 0.838          | 1.169             | 0.980  |     |
| 1 CC Uplink - Power Class 3              | N/A               | 2680.00   | 41490 | High     | LTE Band 41     | 20                          | 15.0                  | 13.85            | 0.16     | 0                    | 13589      | QPSK    | 50        | 0       | 0 mm  | back       | 1:1.58   | 0.823          | 1.303             | 1.072  |     |
| 1 CC Uplink - Power Class 3              | N/A               | 2593.00   | 40620 | Mid      | LTE Band 41     | 20                          | 15.0                  | 14.52            | 0.14     | 0                    | 13589      | QPSK    | 100       | 0       | 0 mm  | back       | 1:1.58   | 0.841          | 1.117             | 0.939  |     |
| 1 CC Uplink - Power Class 2              | N/A               | 2680.00   | 41490 | High     | LTE Band 41     | 20                          | 15.0                  | 13.87            | 0.06     | 0                    | 13589      | QPSK    | 50        | 0       | 0 mm  | back       | 1:2.31   | 0.566          | 1.297             | 0.734  |     |
| 2 CC Uplink - Power Class 3              | PCC               | 2680.00   | 41490 | High     | LTE Band 41     | 20                          | 15.0                  | 14.50            | 0.16     | 0                    | 13589      | QPSK    | 50        | 0       | 0 mm  | back       | 1:1.58   | 0.901          | 1.122             | 1.011  | A11 |
| 2 CC Uplink - Power Class 3              | SCC               | 2660.20   | 41292 | High     |                 |                             |                       |                  |          |                      |            | QPSK    | 50        | 50      |       |            |          |                |                   |        |     |
| 1 CC Uplink - Power Class 3              | N/A               | 2593.00   | 40620 | Mid      | LTE Band 41     | 20                          | 15.0                  | 14.60            | -0.17    | 0                    | 13589      | QPSK    | 1         | 0       | 0 mm  | top        | 1:1.58   | 0.465          | 1.096             | 0.510  |     |
| 1 CC Uplink - Power Class 3              | N/A               | 2593.00   | 40620 | Mid      | LTE Band 41     | 20                          | 15.0                  | 14.61            | 0.19     | 0                    | 13589      | QPSK    | 50        | 0       | 0 mm  | top        | 1:1.58   | 0.453          | 1.094             | 0.496  |     |
| 1 CC Uplink - Power Class 3              | N/A               | 2506.00   | 39750 | Low      | LTE Band 41     | 20                          | 15.0                  | 14.01            | -0.06    | 0                    | 13589      | QPSK    | 50        | 0       | 0 mm  | back       | 1:1.58   | 0.754          | 1.256             | 0.947  |     |
| 2 CC Uplink - Power Class 3              | PCC               | 2680.00   | 41490 | High     | LTE Band 41     | 20                          | 15.0                  | 14.50            | 0.16     | 0                    | 13589      | QPSK    | 50        | 0       | 0 mm  | back       | 1:1.58   | 0.844          | 1.122             | 0.947  |     |
| 2 CC Uplink - Power Class 3              | SCC               | 2660.20   | 41292 | High     |                 |                             |                       |                  |          |                      |            | QPSK    | 50        | 50      |       |            |          |                |                   |        |     |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT    |                   |           |       |          |                 |                             |                       |                  |          | Body                 |            |         |           |         |       |            |          |                |                   |        |     |
| Spatial Peak                             |                   |           |       |          |                 |                             |                       |                  |          | 1.6 W/kg (mW/g)      |            |         |           |         |       |            |          |                |                   |        |     |
| Uncontrolled Exposure/General Population |                   |           |       |          |                 |                             |                       |                  |          | averaged over 1 gram |            |         |           |         |       |            |          |                |                   |        |     |

Note: Blue entry indicates variability measurement.

**Table 10-10**  
**2.4 GHz WLAN Body SAR**

| MEASUREMENT RESULTS                      |     |         |         |                 |                             |                       |                  |                      |                 |                      |                  |        |                |                       |          |                        |                             |                   |        |
|------------------------------------------|-----|---------|---------|-----------------|-----------------------------|-----------------------|------------------|----------------------|-----------------|----------------------|------------------|--------|----------------|-----------------------|----------|------------------------|-----------------------------|-------------------|--------|
| FREQUENCY                                |     | Mode    | Service | Bandwidth [MHz] | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | Spacing              | Antenna Config. | Device Serial Number | Data Rate (Mbps) | Side   | Duty Cycle (%) | Peak SAR of Area Scan | SAR (1g) | Scaling Factor (Power) | Scaling Factor (Duty Cycle) | Reported SAR (1g) | Plot # |
| MHz                                      | Ch. |         |         |                 |                             |                       |                  |                      |                 |                      |                  |        |                | W/kg                  | (W/kg)   |                        |                             | (W/kg)            |        |
| 2412                                     | 1   | 802.11b | DSSS    | 22              | 14.0                        | 13.32                 | 0.12             | 5 mm                 | 1               | 19107                | 1                | back   | 98.9           | 0.258                 | 0.188    | 1.169                  | 1.011                       | 0.222             |        |
| 2412                                     | 1   | 802.11b | DSSS    | 22              | 14.0                        | 13.32                 | 0.13             | 0 mm                 | 1               | 19107                | 1                | top    | 98.9           | 0.001                 | 0.009    | 1.169                  | 1.011                       | 0.011             |        |
| 2412                                     | 1   | 802.11b | DSSS    | 22              | 14.0                        | 13.32                 | -0.12            | 0 mm                 | 1               | 19107                | 1                | bottom | 98.9           | 0.381                 | 0.273    | 1.169                  | 1.011                       | 0.323             |        |
| 2412                                     | 1   | 802.11b | DSSS    | 22              | 14.0                        | 13.32                 | 0.16             | 0 mm                 | 1               | 19107                | 1                | right  | 98.9           | 0.077                 | 0.065    | 1.169                  | 1.011                       | 0.077             |        |
| 2412                                     | 1   | 802.11b | DSSS    | 22              | 13.0                        | 12.45                 | -0.09            | 0 mm                 | 1               | 19107                | 1                | back   | 98.9           | 1.138                 | 0.485    | 1.135                  | 1.011                       | 0.557             |        |
| 2412                                     | 1   | 802.11b | DSSS    | 22              | 14.0                        | 13.32                 | -0.05            | 5 mm                 | 2               | 19107                | 1                | back   | 99.0           | 0.449                 | 0.214    | 1.169                  | 1.010                       | 0.253             |        |
| 2412                                     | 1   | 802.11b | DSSS    | 22              | 14.0                        | 13.32                 | 0.13             | 0 mm                 | 2               | 19107                | 1                | top    | 99.0           | 0.003                 | 0.002    | 1.169                  | 1.010                       | 0.002             |        |
| 2412                                     | 1   | 802.11b | DSSS    | 22              | 14.0                        | 13.32                 | 0.09             | 0 mm                 | 2               | 19107                | 1                | bottom | 99.0           | 0.169                 | 0.097    | 1.169                  | 1.010                       | 0.115             |        |
| 2412                                     | 1   | 802.11b | DSSS    | 22              | 14.0                        | 13.32                 | 0.17             | 0 mm                 | 2               | 19107                | 1                | right  | 99.0           | 0.012                 | 0.008    | 1.169                  | 1.010                       | 0.009             |        |
| 2412                                     | 1   | 802.11b | DSSS    | 22              | 14.0                        | 13.32                 | 0.19             | 0 mm                 | 2               | 19107                | 1                | left   | 99.0           | 0.011                 | 0.005    | 1.169                  | 1.010                       | 0.006             |        |
| 2437                                     | 6   | 802.11b | DSSS    | 22              | 13.0                        | 12.48                 | -0.10            | 0 mm                 | 2               | 19107                | 1                | back   | 99.0           | 0.893                 | 0.514    | 1.127                  | 1.010                       | 0.585             | A12    |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT    |     |         |         |                 |                             |                       |                  | Body                 |                 |                      |                  |        |                |                       |          |                        |                             |                   |        |
| Spatial Peak                             |     |         |         |                 |                             |                       |                  | 1.6 W/kg (mW/g)      |                 |                      |                  |        |                |                       |          |                        |                             |                   |        |
| Uncontrolled Exposure/General Population |     |         |         |                 |                             |                       |                  | averaged over 1 gram |                 |                      |                  |        |                |                       |          |                        |                             |                   |        |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | <b>SAR EVALUATION REPORT</b> |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 74 of 100                  |

**Table 10-11**  
**5 GHz WLAN Body SAR**

| MEASUREMENT RESULTS                      |     |          |         |                 |                             |                       |                  |                      |                 |                      |                  |        |                |                       |          |                        |                             |                   |        |
|------------------------------------------|-----|----------|---------|-----------------|-----------------------------|-----------------------|------------------|----------------------|-----------------|----------------------|------------------|--------|----------------|-----------------------|----------|------------------------|-----------------------------|-------------------|--------|
| FREQUENCY                                |     | Mode     | Service | Bandwidth [MHz] | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | Spacing              | Antenna Config. | Device Serial Number | Data Rate (Mbps) | Side   | Duty Cycle (%) | Peak SAR of Area Scan | SAR (1g) | Scaling Factor (Power) | Scaling Factor (Duty Cycle) | Reported SAR (1g) | Plot # |
| MHz                                      | Ch. |          |         |                 |                             |                       |                  |                      |                 |                      |                  |        |                | W/kg                  | (W/kg)   |                        |                             | (W/kg)            |        |
| 5310                                     | 62  | 802.11n  | OFDM    | 40              | 14.0                        | 13.19                 | 0.21             | 5 mm                 | 1               | 19107                | 13.5             | back   | 94.2           | 0.462                 | 0.287    | 1.205                  | 1.062                       | 0.367             |        |
| 5310                                     | 62  | 802.11n  | OFDM    | 40              | 14.0                        | 13.19                 | 0.14             | 0 mm                 | 1               | 19107                | 13.5             | top    | 94.2           | 0.019                 | 0.004    | 1.205                  | 1.062                       | 0.005             |        |
| 5310                                     | 62  | 802.11n  | OFDM    | 40              | 14.0                        | 13.19                 | -0.12            | 0 mm                 | 1               | 19107                | 13.5             | bottom | 94.2           | 0.953                 | 0.332    | 1.205                  | 1.062                       | 0.425             |        |
| 5310                                     | 62  | 802.11n  | OFDM    | 40              | 14.0                        | 13.19                 | 0.19             | 0 mm                 | 1               | 19107                | 13.5             | right  | 94.2           | 0.122                 | 0.044    | 1.205                  | 1.062                       | 0.056             |        |
| 5290                                     | 58  | 802.11ac | OFDM    | 80              | 10.0                        | 8.47                  | -0.10            | 0 mm                 | 1               | 19107                | 29.3             | back   | 87.3           | 1.434                 | 0.525    | 1.422                  | 1.145                       | 0.855             |        |
| 5310                                     | 62  | 802.11n  | OFDM    | 40              | 14.0                        | 13.12                 | 0.14             | 5 mm                 | 2               | 19107                | 13.5             | back   | 94.4           | 0.223                 | 0.120    | 1.225                  | 1.059                       | 0.156             |        |
| 5310                                     | 62  | 802.11n  | OFDM    | 40              | 14.0                        | 13.12                 | -0.16            | 0 mm                 | 2               | 19107                | 13.5             | top    | 94.4           | 0.002                 | 0.000    | 1.225                  | 1.059                       | 0.000             |        |
| 5310                                     | 62  | 802.11n  | OFDM    | 40              | 14.0                        | 13.12                 | 0.12             | 0 mm                 | 2               | 19107                | 13.5             | bottom | 94.4           | 0.353                 | 0.146    | 1.225                  | 1.059                       | 0.189             |        |
| 5310                                     | 62  | 802.11n  | OFDM    | 40              | 14.0                        | 13.12                 | 0.00             | 0 mm                 | 2               | 19107                | 13.5             | right  | 94.4           | 0.001                 | 0.000    | 1.225                  | 1.059                       | 0.000             |        |
| 5310                                     | 62  | 802.11n  | OFDM    | 40              | 14.0                        | 13.12                 | 0.17             | 0 mm                 | 2               | 19107                | 13.5             | left   | 94.4           | 0.216                 | 0.062    | 1.225                  | 1.059                       | 0.080             |        |
| 5290                                     | 58  | 802.11ac | OFDM    | 80              | 10.0                        | 9.47                  | -0.11            | 0 mm                 | 2               | 19107                | 29.3             | back   | 89.2           | 0.739                 | 0.343    | 1.130                  | 1.121                       | 0.434             |        |
| 5510                                     | 102 | 802.11n  | OFDM    | 40              | 14.0                        | 13.14                 | -0.16            | 5 mm                 | 1               | 19107                | 13.5             | back   | 94.2           | 0.488                 | 0.318    | 1.219                  | 1.062                       | 0.412             |        |
| 5510                                     | 102 | 802.11n  | OFDM    | 40              | 14.0                        | 13.14                 | -0.14            | 0 mm                 | 1               | 19107                | 13.5             | top    | 94.2           | 0.008                 | 0.002    | 1.219                  | 1.062                       | 0.003             |        |
| 5510                                     | 102 | 802.11n  | OFDM    | 40              | 14.0                        | 13.14                 | -0.03            | 0 mm                 | 1               | 19107                | 13.5             | bottom | 94.2           | 0.680                 | 0.233    | 1.219                  | 1.062                       | 0.302             |        |
| 5510                                     | 102 | 802.11n  | OFDM    | 40              | 14.0                        | 13.14                 | 0.18             | 0 mm                 | 1               | 19107                | 13.5             | right  | 94.2           | 0.139                 | 0.044    | 1.219                  | 1.062                       | 0.057             |        |
| 5530                                     | 106 | 802.11ac | OFDM    | 80              | 10.0                        | 9.04                  | -0.04            | 0 mm                 | 1               | 19107                | 29.3             | back   | 87.3           | 0.743                 | 0.534    | 1.247                  | 1.145                       | 0.762             |        |
| 5610                                     | 122 | 802.11ac | OFDM    | 80              | 10.0                        | 9.16                  | -0.19            | 0 mm                 | 1               | 19107                | 29.3             | back   | 87.3           | 2.115                 | 0.724    | 1.213                  | 1.145                       | 1.006             |        |
| 5590                                     | 118 | 802.11n  | OFDM    | 40              | 14.0                        | 13.48                 | 0.19             | 5 mm                 | 2               | 19107                | 13.5             | back   | 94.4           | 0.488                 | 0.261    | 1.127                  | 1.059                       | 0.312             |        |
| 5590                                     | 118 | 802.11n  | OFDM    | 40              | 14.0                        | 13.48                 | 0.00             | 0 mm                 | 2               | 19107                | 13.5             | top    | 94.4           | 0.003                 | 0.000    | 1.127                  | 1.059                       | 0.000             |        |
| 5590                                     | 118 | 802.11n  | OFDM    | 40              | 14.0                        | 13.48                 | 0.16             | 0 mm                 | 2               | 19107                | 13.5             | bottom | 94.4           | 0.708                 | 0.301    | 1.127                  | 1.059                       | 0.359             |        |
| 5590                                     | 118 | 802.11n  | OFDM    | 40              | 14.0                        | 13.48                 | 0.00             | 0 mm                 | 2               | 19107                | 13.5             | right  | 94.4           | 0.000                 | 0.000    | 1.127                  | 1.059                       | 0.000             |        |
| 5590                                     | 118 | 802.11n  | OFDM    | 40              | 14.0                        | 13.48                 | 0.11             | 0 mm                 | 2               | 19107                | 13.5             | left   | 94.4           | 0.179                 | 0.048    | 1.127                  | 1.059                       | 0.057             |        |
| 5530                                     | 106 | 802.11ac | OFDM    | 80              | 10.0                        | 9.17                  | 0.14             | 0 mm                 | 2               | 19107                | 29.3             | back   | 89.2           | 1.019                 | 0.421    | 1.211                  | 1.121                       | 0.572             |        |
| 5755                                     | 151 | 802.11n  | OFDM    | 40              | 14.0                        | 12.92                 | 0.04             | 5 mm                 | 1               | 19107                | 13.5             | back   | 94.2           | 0.447                 | 0.283    | 1.282                  | 1.062                       | 0.385             |        |
| 5755                                     | 151 | 802.11n  | OFDM    | 40              | 14.0                        | 12.92                 | 0.20             | 0 mm                 | 1               | 19107                | 13.5             | top    | 94.2           | 0.001                 | 0.000    | 1.282                  | 1.062                       | 0.000             |        |
| 5755                                     | 151 | 802.11n  | OFDM    | 40              | 14.0                        | 12.92                 | 0.14             | 0 mm                 | 1               | 19107                | 13.5             | bottom | 94.2           | 0.486                 | 0.155    | 1.282                  | 1.062                       | 0.211             |        |
| 5755                                     | 151 | 802.11n  | OFDM    | 40              | 14.0                        | 12.92                 | 0.19             | 0 mm                 | 1               | 19107                | 13.5             | right  | 94.2           | 0.091                 | 0.022    | 1.282                  | 1.062                       | 0.030             |        |
| 5775                                     | 155 | 802.11ac | OFDM    | 80              | 10.0                        | 9.26                  | -0.15            | 0 mm                 | 1               | 19107                | 29.3             | back   | 87.3           | 2.141                 | 0.861    | 1.186                  | 1.145                       | 1.169             |        |
| 5795                                     | 159 | 802.11n  | OFDM    | 40              | 14.0                        | 13.42                 | -0.06            | 5 mm                 | 2               | 19107                | 13.5             | back   | 94.4           | 0.380                 | 0.183    | 1.143                  | 1.059                       | 0.222             |        |
| 5795                                     | 159 | 802.11n  | OFDM    | 40              | 14.0                        | 13.42                 | 0.20             | 0 mm                 | 2               | 19107                | 13.5             | top    | 94.4           | 0.007                 | 0.000    | 1.143                  | 1.059                       | 0.000             |        |
| 5795                                     | 159 | 802.11n  | OFDM    | 40              | 14.0                        | 13.42                 | 0.13             | 0 mm                 | 2               | 19107                | 13.5             | bottom | 94.4           | 0.581                 | 0.210    | 1.143                  | 1.059                       | 0.254             |        |
| 5795                                     | 159 | 802.11n  | OFDM    | 40              | 14.0                        | 13.42                 | 0.00             | 0 mm                 | 2               | 19107                | 13.5             | right  | 94.4           | 0.002                 | 0.000    | 1.143                  | 1.059                       | 0.000             |        |
| 5795                                     | 159 | 802.11n  | OFDM    | 40              | 14.0                        | 13.42                 | -0.13            | 0 mm                 | 2               | 19107                | 13.5             | left   | 94.4           | 0.101                 | 0.027    | 1.143                  | 1.059                       | 0.033             |        |
| 5775                                     | 155 | 802.11ac | OFDM    | 80              | 10.0                        | 8.88                  | -0.15            | 0 mm                 | 2               | 19107                | 29.3             | back   | 89.2           | 1.490                 | 0.434    | 1.294                  | 1.121                       | 0.630             |        |
| 5775                                     | 155 | 802.11ac | OFDM    | 80              | 10.0                        | 9.26                  | -0.14            | 0 mm                 | 1               | 19107                | 29.3             | back   | 87.3           | 2.186                 | 0.866    | 1.186                  | 1.145                       | 1.176             | A13    |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT    |     |          |         |                 |                             |                       |                  | Body                 |                 |                      |                  |        |                |                       |          |                        |                             |                   |        |
| Spatial Peak                             |     |          |         |                 |                             |                       |                  | 1.6 W/kg (mW/g)      |                 |                      |                  |        |                |                       |          |                        |                             |                   |        |
| Uncontrolled Exposure/General Population |     |          |         |                 |                             |                       |                  | averaged over 1 gram |                 |                      |                  |        |                |                       |          |                        |                             |                   |        |

Note: Blue entry indicates variability measurement.

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | SAR EVALUATION REPORT        |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 75 of 100                  |

**Table 10-12  
DSS Body SAR**

| MEASUREMENT RESULTS                                                                               |     |           |         |                             |                       |                  |                                                 |                      |                  |        |                |          |                             |                             |                   |        |
|---------------------------------------------------------------------------------------------------|-----|-----------|---------|-----------------------------|-----------------------|------------------|-------------------------------------------------|----------------------|------------------|--------|----------------|----------|-----------------------------|-----------------------------|-------------------|--------|
| FREQUENCY                                                                                         |     | Mode      | Service | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | Spacing                                         | Device Serial Number | Data Rate (Mbps) | Side   | Duty Cycle (%) | SAR (1g) | Scaling Factor (Cond Power) | Scaling Factor (Duty Cycle) | Reported SAR (1g) | Plot # |
| MHz                                                                                               | Ch. |           |         |                             |                       |                  |                                                 |                      |                  |        |                | (W/kg)   |                             |                             | (W/kg)            |        |
| 2480                                                                                              | 78  | Bluetooth | FHSS    | 9.5                         | 8.32                  | -0.11            | 0 mm                                            | 19107                | 1                | back   | 77.3           | 0.295    | 1.312                       | 1.294                       | 0.501             | A14    |
| 2480                                                                                              | 78  | Bluetooth | FHSS    | 9.5                         | 8.32                  | 0.16             | 0 mm                                            | 19107                | 1                | top    | 77.3           | 0.000    | 1.312                       | 1.294                       | 0.000             |        |
| 2480                                                                                              | 78  | Bluetooth | FHSS    | 9.5                         | 8.32                  | 0.04             | 0 mm                                            | 19107                | 1                | bottom | 77.3           | 0.112    | 1.312                       | 1.294                       | 0.190             |        |
| 2480                                                                                              | 78  | Bluetooth | FHSS    | 9.5                         | 8.32                  | 0.18             | 0 mm                                            | 19107                | 1                | right  | 77.3           | 0.028    | 1.312                       | 1.294                       | 0.048             |        |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population |     |           |         |                             |                       |                  | Body<br>1.6 W/kg (mW/g)<br>averaged over 1 gram |                      |                  |        |                |          |                             |                             |                   |        |

## 10.2 SAR Test Notes

### General Notes:

- The test data reported are the worst-case SAR values according to test procedures specified in FCC KDB Publication 616217 D04v01r02 and FCC KDB Publication 447498 D01v06.
- Batteries are fully charged at the beginning of the SAR measurements.
- Liquid tissue depth was at least 15.0 cm for all frequencies.
- The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
- SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
- Per FCC KDB 865664 D01v01r04, variability SAR tests were performed when the measured SAR results for a frequency band were greater than or equal to 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 12 for variability analysis.
- FCC KDB Publication 616217 D04v01r02 Section 4.3, SAR tests are required for the back surface and edges of the tablet with the tablet touching the phantom. The SAR Exclusion Threshold in FCC KDB 447498 D01v06 was applied to determine SAR test exclusion for adjacent edge configurations.

### CDMA/EVDO Notes:

- CDMA Body SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0 according to KDB 941225 D01v03r01 procedures for data devices. Wireless Router SAR tests for Subtype 2 of Rev.A and 1x RTT configurations were not required per the 3G SAR Test Reduction Policy in KDB Publication 941225 D01v03r01.
- Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.

### LTE Notes:

- LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r04. The general test procedures used for testing can be found in Section 7.5.4.
- MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
- A-MPR was disabled for all SAR tests by setting NS=01 and MCC=001 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | <b>SAR EVALUATION REPORT</b> |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 76 of 100                  |

4. Per FCC KDB Publication 447498 D01v06, when the reported LTE Band 41 SAR measured at the highest output power channel in a given a test configuration was > 0.6 W/kg for 1g evaluations, testing at the other channels was required for such test configurations.
5. TDD LTE was tested per the guidance provided in FCC KDB Publication 941225 D05v02r04. Testing was performed using UL-DL configuration 0 with 6 UL subframes and 2 S subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4, the duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.
6. Per KDB Publication 941225 D05Av01r02, SAR for downlink only LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.
7. This device supports Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operations is 43.3 % using UL-DL configuration 1. Per FCC Guidance, all SAR tests were performed using Power Class 3. SAR with power class 2 at the available duty factor was additionally performed for the power class 3 configuration with the highest SAR configuration for each exposure conditions. Please see Section 13 for linearity results.
8. For LTE Band 41, per FCC guidance, SAR was first measured with only a single carrier active in the uplink (carrier aggregation not active). For each exposure condition, the uplink CA scenario with two component carriers was additionally tested for the configuration with the highest SAR when carrier aggregation was not active. The SCC was configured with the closest available contiguous channel. The two component carriers were configured so the resource blocks are physically allocated side by side to achieve the maximum output power.

#### WLAN Notes:

1. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 7.6.4 for more information.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg for 1g evaluations. See Section 7.6.5 for more information.
3. Per KDB Publication 248227 D01v02r02, SAR for MIMO was evaluated by following the simultaneous SAR provisions from KDB Publication 447498 D01v06 by either evaluating the sum of the 1g SAR values of each antenna transmitting independently or making a SAR measurement with both antennas transmitting simultaneously. Please see Section 11 for complete analysis.
4. When the maximum reported 1g averaged SAR is  $\leq 0.8$  W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was  $\leq 1.20$  W/kg for 1g evaluations or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.

#### Bluetooth Notes

1. Bluetooth SAR was measured with the device connected to a call box with hopping disabled with DH5 operation and Tx Tests test mode type. Per October 2016 TCB Workshop Notes, the reported SAR was scaled to the 100% transmission duty factor to determine compliance. See Section 8.4 for the time domain plot and calculation for the duty factor of the device.

|                                             |                                                                                     |                                     |                                                                                       |                                        |
|---------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> A3LSMT837P                   |  | <b>SAR EVALUATION REPORT</b>        |  | <b>Approved by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>1M1806060119-01.A3L | <b>Test Dates:</b><br>06/11/18 - 06/26/18                                           | <b>DUT Type:</b><br>Portable Tablet |                                                                                       | Page 77 of 100                         |

## 11 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

### 11.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

### 11.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB Publication 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is  $\leq 1.6$  W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1g SAR.

|                                      |                                                                                                                                   |                              |                                                                                       |                                        |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: A3LSMT837P                   |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>SAR EVALUATION REPORT</b> |  | <b>Approved by:</b><br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                                                                | DUT Type:<br>Portable Tablet |                                                                                       | Page 78 of 100                         |



## 11.3 Body SAR Simultaneous Transmission Analysis

**Table 11-1**  
**Simultaneous Transmission Scenario with 2.4 GHz WLAN**

| Simult Tx | Configuration | EVDO BC10 (\$90S) SAR (W/kg) | 2.4 GHz WLAN Ant 1 SAR (W/kg) | 2.4 GHz WLAN Ant 2 SAR (W/kg) | $\Sigma$ SAR (W/kg) |              |            | SPLSR |      |      |
|-----------|---------------|------------------------------|-------------------------------|-------------------------------|---------------------|--------------|------------|-------|------|------|
|           |               | 1                            | 2                             | 3                             | 1+2                 | 1+3          | 1+2+3      | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 0.883                        | 0.557                         | 0.585                         | 1.440               | <b>1.468</b> | See Note 1 | 0.01  | 0.01 | 0.01 |
|           | Top           | 1.247                        | 0.011                         | 0.002                         | 1.258               | 1.249        | 1.260      | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400                        | 0.323                         | 0.115                         | 0.723               | 0.515        | 0.838      | N/A   | N/A  | N/A  |
|           | Right         | 0.278                        | 0.077                         | 0.009                         | 0.355               | 0.287        | 0.364      | N/A   | N/A  | N/A  |
|           | Left          | 0.150                        | 0.400                         | 0.006                         | 0.550               | 0.156        | 0.556      | N/A   | N/A  | N/A  |

| Simult Tx | Configuration | EVDO BC0 (\$22H) SAR (W/kg) | 2.4 GHz WLAN Ant 1 SAR (W/kg) | 2.4 GHz WLAN Ant 2 SAR (W/kg) | $\Sigma$ SAR (W/kg) |              |            | SPLSR |      |      |
|-----------|---------------|-----------------------------|-------------------------------|-------------------------------|---------------------|--------------|------------|-------|------|------|
|           |               | 1                           | 2                             | 3                             | 1+2                 | 1+3          | 1+2+3      | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 0.995                       | 0.557                         | 0.585                         | 1.552               | <b>1.580</b> | See Note 1 | 0.01  | 0.01 | 0.01 |
|           | Top           | 1.371                       | 0.011                         | 0.002                         | 1.382               | 1.373        | 1.384      | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400                       | 0.323                         | 0.115                         | 0.723               | 0.515        | 0.838      | N/A   | N/A  | N/A  |
|           | Right         | 0.297                       | 0.077                         | 0.009                         | 0.374               | 0.306        | 0.383      | N/A   | N/A  | N/A  |
|           | Left          | 0.178                       | 0.400                         | 0.006                         | 0.578               | 0.184        | 0.584      | N/A   | N/A  | N/A  |

| Simult Tx | Configuration | PCS EVDO SAR (W/kg) | 2.4 GHz WLAN Ant 1 SAR (W/kg) | 2.4 GHz WLAN Ant 2 SAR (W/kg) | $\Sigma$ SAR (W/kg) |            |              | SPLSR |      |      |
|-----------|---------------|---------------------|-------------------------------|-------------------------------|---------------------|------------|--------------|-------|------|------|
|           |               | 1                   | 2                             | 3                             | 1+2                 | 1+3        | 1+2+3        | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 1.088               | 0.557                         | 0.585                         | See Note 1          | See Note 1 | See Note 1   | 0.01  | 0.01 | 0.01 |
|           | Top           | 1.029               | 0.011                         | 0.002                         | 1.040               | 1.031      | 1.042        | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400               | 0.323                         | 0.115                         | 0.723               | 0.515      | 0.838        | N/A   | N/A  | N/A  |
|           | Right         | 1.032               | 0.077                         | 0.009                         | 1.109               | 1.041      | <b>1.118</b> | N/A   | N/A  | N/A  |
|           | Left          | 0.374               | 0.400                         | 0.006                         | 0.774               | 0.380      | 0.780        | N/A   | N/A  | N/A  |

| Simult Tx | Configuration | LTE Band 12 SAR (W/kg) | 2.4 GHz WLAN Ant 1 SAR (W/kg) | 2.4 GHz WLAN Ant 2 SAR (W/kg) | $\Sigma$ SAR (W/kg) |              |            | SPLSR |      |      |
|-----------|---------------|------------------------|-------------------------------|-------------------------------|---------------------|--------------|------------|-------|------|------|
|           |               | 1                      | 2                             | 3                             | 1+2                 | 1+3          | 1+2+3      | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 0.671                  | 0.557                         | 0.585                         | 1.228               | <b>1.256</b> | See Note 1 | 0.01  | 0.01 | 0.01 |
|           | Top           | 0.732                  | 0.011                         | 0.002                         | 0.743               | 0.734        | 0.745      | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400                  | 0.323                         | 0.115                         | 0.723               | 0.515        | 0.838      | N/A   | N/A  | N/A  |
|           | Right         | 0.188                  | 0.077                         | 0.009                         | 0.265               | 0.197        | 0.274      | N/A   | N/A  | N/A  |
|           | Left          | 0.250                  | 0.400                         | 0.006                         | 0.650               | 0.256        | 0.656      | N/A   | N/A  | N/A  |

| Simult Tx | Configuration | LTE Band 13 SAR (W/kg) | 2.4 GHz WLAN Ant 1 SAR (W/kg) | 2.4 GHz WLAN Ant 2 SAR (W/kg) | $\Sigma$ SAR (W/kg) |              |            | SPLSR |      |      |
|-----------|---------------|------------------------|-------------------------------|-------------------------------|---------------------|--------------|------------|-------|------|------|
|           |               | 1                      | 2                             | 3                             | 1+2                 | 1+3          | 1+2+3      | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 0.856                  | 0.557                         | 0.585                         | 1.413               | <b>1.441</b> | See Note 1 | 0.01  | 0.01 | 0.01 |
|           | Top           | 1.068                  | 0.011                         | 0.002                         | 1.079               | 1.070        | 1.081      | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400                  | 0.323                         | 0.115                         | 0.723               | 0.515        | 0.838      | N/A   | N/A  | N/A  |
|           | Right         | 0.281                  | 0.077                         | 0.009                         | 0.358               | 0.290        | 0.367      | N/A   | N/A  | N/A  |
|           | Left          | 0.219                  | 0.400                         | 0.006                         | 0.619               | 0.225        | 0.625      | N/A   | N/A  | N/A  |

|                                      |                                                                                                                                   |                              |                                                                                       |                                        |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: A3LSMT837P                   |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>SAR EVALUATION REPORT</b> |  | <b>Approved by:</b><br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                                                                | DUT Type:<br>Portable Tablet |                                                                                       | Page 79 of 100                         |



| Simult Tx | Configuration | LTE Band 26<br>(Cell) SAR<br>(W/kg) | 2.4 GHz<br>WLAN Ant 1<br>SAR (W/kg) | 2.4 GHz<br>WLAN Ant 2<br>SAR (W/kg) | $\Sigma$ SAR (W/kg) |            |            | SPLSR |      |      |
|-----------|---------------|-------------------------------------|-------------------------------------|-------------------------------------|---------------------|------------|------------|-------|------|------|
|           |               | 1                                   | 2                                   | 3                                   | 1+2                 | 1+3        | 1+2+3      | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 1.034                               | 0.557                               | 0.585                               | 1.591               | See Note 1 | See Note 1 | 0.01  | 0.01 | 0.01 |
|           | Top           | 1.352                               | 0.011                               | 0.002                               | 1.363               | 1.354      | 1.365      | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400                               | 0.323                               | 0.115                               | 0.723               | 0.515      | 0.838      | N/A   | N/A  | N/A  |
|           | Right         | 0.253                               | 0.077                               | 0.009                               | 0.330               | 0.262      | 0.339      | N/A   | N/A  | N/A  |
|           | Left          | 0.147                               | 0.400                               | 0.006                               | 0.547               | 0.153      | 0.553      | N/A   | N/A  | N/A  |

| Simult Tx | Configuration | LTE Band 5<br>(Cell) SAR<br>(W/kg) | 2.4 GHz<br>WLAN Ant 1<br>SAR (W/kg) | 2.4 GHz<br>WLAN Ant 2<br>SAR (W/kg) | $\Sigma$ SAR (W/kg) |            |            | SPLSR |      |      |
|-----------|---------------|------------------------------------|-------------------------------------|-------------------------------------|---------------------|------------|------------|-------|------|------|
|           |               | 1                                  | 2                                   | 3                                   | 1+2                 | 1+3        | 1+2+3      | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 1.063                              | 0.557                               | 0.585                               | See Note 1          | See Note 1 | See Note 1 | 0.01  | 0.01 | 0.01 |
|           | Top           | 1.398                              | 0.011                               | 0.002                               | 1.409               | 1.400      | 1.411      | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400                              | 0.323                               | 0.115                               | 0.723               | 0.515      | 0.838      | N/A   | N/A  | N/A  |
|           | Right         | 0.289                              | 0.077                               | 0.009                               | 0.366               | 0.298      | 0.375      | N/A   | N/A  | N/A  |
|           | Left          | 0.188                              | 0.400                               | 0.006                               | 0.588               | 0.194      | 0.594      | N/A   | N/A  | N/A  |

| Simult Tx | Configuration | LTE Band 4<br>(AWS) SAR<br>(W/kg) | 2.4 GHz<br>WLAN Ant 1<br>SAR (W/kg) | 2.4 GHz<br>WLAN Ant 2<br>SAR (W/kg) | $\Sigma$ SAR (W/kg) |            |            | SPLSR |      |      |
|-----------|---------------|-----------------------------------|-------------------------------------|-------------------------------------|---------------------|------------|------------|-------|------|------|
|           |               | 1                                 | 2                                   | 3                                   | 1+2                 | 1+3        | 1+2+3      | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 1.117                             | 0.557                               | 0.585                               | See Note 1          | See Note 1 | See Note 1 | 0.01  | 0.01 | 0.01 |
|           | Top           | 1.070                             | 0.011                               | 0.002                               | 1.081               | 1.072      | 1.083      | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400                             | 0.323                               | 0.115                               | 0.723               | 0.515      | 0.838      | N/A   | N/A  | N/A  |
|           | Right         | 1.366                             | 0.077                               | 0.009                               | 1.443               | 1.375      | 1.452      | N/A   | N/A  | N/A  |
|           | Left          | 0.556                             | 0.400                               | 0.006                               | 0.956               | 0.562      | 0.962      | N/A   | N/A  | N/A  |

| Simult Tx | Configuration | LTE Band 25<br>(PCS) SAR<br>(W/kg) | 2.4 GHz<br>WLAN Ant 1<br>SAR (W/kg) | 2.4 GHz<br>WLAN Ant 2<br>SAR (W/kg) | $\Sigma$ SAR (W/kg) |            |            | SPLSR |      |      |
|-----------|---------------|------------------------------------|-------------------------------------|-------------------------------------|---------------------|------------|------------|-------|------|------|
|           |               | 1                                  | 2                                   | 3                                   | 1+2                 | 1+3        | 1+2+3      | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 1.181                              | 0.557                               | 0.585                               | See Note 1          | See Note 1 | See Note 1 | 0.01  | 0.01 | 0.01 |
|           | Top           | 0.939                              | 0.011                               | 0.002                               | 0.950               | 0.941      | 0.952      | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400                              | 0.323                               | 0.115                               | 0.723               | 0.515      | 0.838      | N/A   | N/A  | N/A  |
|           | Right         | 0.388                              | 0.077                               | 0.009                               | 0.465               | 0.397      | 0.474      | N/A   | N/A  | N/A  |
|           | Left          | 0.283                              | 0.400                               | 0.006                               | 0.683               | 0.289      | 0.689      | N/A   | N/A  | N/A  |

| Simult Tx | Configuration | LTE Band 7<br>SAR (W/kg) | 2.4 GHz<br>WLAN Ant 1<br>SAR (W/kg) | 2.4 GHz<br>WLAN Ant 2<br>SAR (W/kg) | $\Sigma$ SAR (W/kg) |       |            | SPLSR |      |      |
|-----------|---------------|--------------------------|-------------------------------------|-------------------------------------|---------------------|-------|------------|-------|------|------|
|           |               | 1                        | 2                                   | 3                                   | 1+2                 | 1+3   | 1+2+3      | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 0.909                    | 0.557                               | 0.585                               | 1.466               | 1.494 | See Note 1 | 0.01  | 0.01 | 0.01 |
|           | Top           | 0.576                    | 0.011                               | 0.002                               | 0.587               | 0.578 | 0.589      | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400                    | 0.323                               | 0.115                               | 0.723               | 0.515 | 0.838      | N/A   | N/A  | N/A  |
|           | Right         | 0.462                    | 0.077                               | 0.009                               | 0.539               | 0.471 | 0.548      | N/A   | N/A  | N/A  |
|           | Left          | 0.245                    | 0.400                               | 0.006                               | 0.645               | 0.251 | 0.651      | N/A   | N/A  | N/A  |

| Simult Tx | Configuration | LTE Band 41<br>SAR (W/kg) | 2.4 GHz<br>WLAN Ant 1<br>SAR (W/kg) | 2.4 GHz<br>WLAN Ant 2<br>SAR (W/kg) | $\Sigma$ SAR (W/kg) |            |            | SPLSR |      |      |
|-----------|---------------|---------------------------|-------------------------------------|-------------------------------------|---------------------|------------|------------|-------|------|------|
|           |               | 1                         | 2                                   | 3                                   | 1+2                 | 1+3        | 1+2+3      | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 1.072                     | 0.557                               | 0.585                               | See Note 1          | See Note 1 | See Note 1 | 0.01  | 0.01 | 0.01 |
|           | Top           | 0.510                     | 0.011                               | 0.002                               | 0.521               | 0.512      | 0.523      | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400                     | 0.323                               | 0.115                               | 0.723               | 0.515      | 0.838      | N/A   | N/A  | N/A  |
|           | Right         | 0.366                     | 0.077                               | 0.009                               | 0.443               | 0.375      | 0.452      | N/A   | N/A  | N/A  |
|           | Left          | 0.137                     | 0.400                               | 0.006                               | 0.537               | 0.143      | 0.543      | N/A   | N/A  | N/A  |

|                                      |                                                                                                                                                                                                        |                              |                                 |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  <b>SAR EVALUATION REPORT</b>  |                              | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                                                                                                                                     | DUT Type:<br>Portable Tablet | Page 80 of 100                  |

**Table 11-2**  
**Simultaneous Transmission Scenario with 5 GHz WLAN**

| Simult Tx | Configuration | EVDO BC10 (\$90S) SAR (W/kg) | 5 GHz WLAN Ant 1 SAR (W/kg) | 5 GHz WLAN Ant 2 SAR (W/kg) | $\Sigma$ SAR (W/kg) |              |            | SPLSR |      |      |
|-----------|---------------|------------------------------|-----------------------------|-----------------------------|---------------------|--------------|------------|-------|------|------|
|           |               | 1                            | 2                           | 3                           | 1+2                 | 1+3          | 1+2+3      | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 0.883                        | 1.176                       | 0.630                       | See Note 1          | <b>1.513</b> | See Note 1 | 0.01  | 0.01 | 0.02 |
|           | Top           | 1.247                        | 0.005                       | 0.000                       | 1.252               | 1.247        | 1.252      | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400                        | 0.425                       | 0.359                       | 0.825               | 0.759        | 1.184      | N/A   | N/A  | N/A  |
|           | Right         | 0.278                        | 0.057                       | 0.000                       | 0.335               | 0.278        | 0.335      | N/A   | N/A  | N/A  |
|           | Left          | 0.150                        | 0.400                       | 0.080                       | 0.550               | 0.230        | 0.630      | N/A   | N/A  | N/A  |

| Simult Tx | Configuration | EVDO BC0 (\$22H) SAR (W/kg) | 5 GHz WLAN Ant 1 SAR (W/kg) | 5 GHz WLAN Ant 2 SAR (W/kg) | $\Sigma$ SAR (W/kg) |            |              | SPLSR |      |      |
|-----------|---------------|-----------------------------|-----------------------------|-----------------------------|---------------------|------------|--------------|-------|------|------|
|           |               | 1                           | 2                           | 3                           | 1+2                 | 1+3        | 1+2+3        | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 0.995                       | 1.176                       | 0.630                       | See Note 1          | See Note 1 | See Note 1   | 0.01  | 0.01 | 0.02 |
|           | Top           | 1.371                       | 0.005                       | 0.000                       | <b>1.376</b>        | 1.371      | <b>1.376</b> | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400                       | 0.425                       | 0.359                       | 0.825               | 0.759      | 1.184        | N/A   | N/A  | N/A  |
|           | Right         | 0.297                       | 0.057                       | 0.000                       | 0.354               | 0.297      | 0.354        | N/A   | N/A  | N/A  |
|           | Left          | 0.178                       | 0.400                       | 0.080                       | 0.578               | 0.258      | 0.658        | N/A   | N/A  | N/A  |

| Simult Tx | Configuration | PCS EVDO SAR (W/kg) | 5 GHz WLAN Ant 1 SAR (W/kg) | 5 GHz WLAN Ant 2 SAR (W/kg) | $\Sigma$ SAR (W/kg) |            |              | SPLSR |      |      |
|-----------|---------------|---------------------|-----------------------------|-----------------------------|---------------------|------------|--------------|-------|------|------|
|           |               | 1                   | 2                           | 3                           | 1+2                 | 1+3        | 1+2+3        | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 1.088               | 1.176                       | 0.630                       | See Note 1          | See Note 1 | See Note 1   | 0.01  | 0.01 | 0.02 |
|           | Top           | 1.029               | 0.005                       | 0.000                       | 1.034               | 1.029      | 1.034        | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400               | 0.425                       | 0.359                       | 0.825               | 0.759      | <b>1.184</b> | N/A   | N/A  | N/A  |
|           | Right         | 1.032               | 0.057                       | 0.000                       | 1.089               | 1.032      | 1.089        | N/A   | N/A  | N/A  |
|           | Left          | 0.374               | 0.400                       | 0.080                       | 0.774               | 0.454      | 0.854        | N/A   | N/A  | N/A  |

| Simult Tx | Configuration | LTE Band 12 SAR (W/kg) | 5 GHz WLAN Ant 1 SAR (W/kg) | 5 GHz WLAN Ant 2 SAR (W/kg) | $\Sigma$ SAR (W/kg) |              |            | SPLSR |      |      |
|-----------|---------------|------------------------|-----------------------------|-----------------------------|---------------------|--------------|------------|-------|------|------|
|           |               | 1                      | 2                           | 3                           | 1+2                 | 1+3          | 1+2+3      | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 0.671                  | 1.176                       | 0.630                       | See Note 1          | <b>1.301</b> | See Note 1 | 0.01  | 0.01 | 0.02 |
|           | Top           | 0.732                  | 0.005                       | 0.000                       | 0.737               | 0.732        | 0.737      | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400                  | 0.425                       | 0.359                       | 0.825               | 0.759        | 1.184      | N/A   | N/A  | N/A  |
|           | Right         | 0.188                  | 0.057                       | 0.000                       | 0.245               | 0.188        | 0.245      | N/A   | N/A  | N/A  |
|           | Left          | 0.250                  | 0.400                       | 0.080                       | 0.650               | 0.330        | 0.730      | N/A   | N/A  | N/A  |

| Simult Tx | Configuration | LTE Band 13 SAR (W/kg) | 5 GHz WLAN Ant 1 SAR (W/kg) | 5 GHz WLAN Ant 2 SAR (W/kg) | $\Sigma$ SAR (W/kg) |              |            | SPLSR |      |      |
|-----------|---------------|------------------------|-----------------------------|-----------------------------|---------------------|--------------|------------|-------|------|------|
|           |               | 1                      | 2                           | 3                           | 1+2                 | 1+3          | 1+2+3      | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 0.856                  | 1.176                       | 0.630                       | See Note 1          | <b>1.486</b> | See Note 1 | 0.01  | 0.01 | 0.02 |
|           | Top           | 1.068                  | 0.005                       | 0.000                       | 1.073               | 1.068        | 1.073      | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400                  | 0.425                       | 0.359                       | 0.825               | 0.759        | 1.184      | N/A   | N/A  | N/A  |
|           | Right         | 0.281                  | 0.057                       | 0.000                       | 0.338               | 0.281        | 0.338      | N/A   | N/A  | N/A  |
|           | Left          | 0.219                  | 0.400                       | 0.080                       | 0.619               | 0.299        | 0.699      | N/A   | N/A  | N/A  |

| Simult Tx | Configuration | LTE Band 26 (Cell) SAR (W/kg) | 5 GHz WLAN Ant 1 SAR (W/kg) | 5 GHz WLAN Ant 2 SAR (W/kg) | $\Sigma$ SAR (W/kg) |            |              | SPLSR |      |      |
|-----------|---------------|-------------------------------|-----------------------------|-----------------------------|---------------------|------------|--------------|-------|------|------|
|           |               | 1                             | 2                           | 3                           | 1+2                 | 1+3        | 1+2+3        | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 1.034                         | 1.176                       | 0.630                       | See Note 1          | See Note 1 | See Note 1   | 0.01  | 0.01 | 0.02 |
|           | Top           | 1.352                         | 0.005                       | 0.000                       | <b>1.357</b>        | 1.352      | <b>1.357</b> | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400                         | 0.425                       | 0.359                       | 0.825               | 0.759      | 1.184        | N/A   | N/A  | N/A  |
|           | Right         | 0.253                         | 0.057                       | 0.000                       | 0.310               | 0.253      | 0.310        | N/A   | N/A  | N/A  |
|           | Left          | 0.147                         | 0.400                       | 0.080                       | 0.547               | 0.227      | 0.627        | N/A   | N/A  | N/A  |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | SAR EVALUATION REPORT        |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 81 of 100                  |

| Simult Tx | Configuration | LTE Band 5<br>(Cell) SAR<br>(W/kg) | 5 GHz WLAN<br>Ant 1 SAR<br>(W/kg) | 5 GHz WLAN<br>Ant 2 SAR<br>(W/kg) | $\Sigma$ SAR (W/kg) |            |              | SPLSR |      |      |
|-----------|---------------|------------------------------------|-----------------------------------|-----------------------------------|---------------------|------------|--------------|-------|------|------|
|           |               | 1                                  | 2                                 | 3                                 | 1+2                 | 1+3        | 1+2+3        | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 1.063                              | 1.176                             | 0.630                             | See Note 1          | See Note 1 | See Note 1   | 0.01  | 0.01 | 0.02 |
|           | Top           | 1.398                              | 0.005                             | 0.000                             | <b>1.403</b>        | 1.398      | <b>1.403</b> | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400                              | 0.425                             | 0.359                             | 0.825               | 0.759      | 1.184        | N/A   | N/A  | N/A  |
|           | Right         | 0.289                              | 0.057                             | 0.000                             | 0.346               | 0.289      | 0.346        | N/A   | N/A  | N/A  |
|           | Left          | 0.188                              | 0.400                             | 0.080                             | 0.588               | 0.268      | 0.668        | N/A   | N/A  | N/A  |

| Simult Tx | Configuration | LTE Band 4<br>(AWS) SAR<br>(W/kg) | 5 GHz WLAN<br>Ant 1 SAR<br>(W/kg) | 5 GHz WLAN<br>Ant 2 SAR<br>(W/kg) | $\Sigma$ SAR (W/kg) |            |              | SPLSR |      |      |
|-----------|---------------|-----------------------------------|-----------------------------------|-----------------------------------|---------------------|------------|--------------|-------|------|------|
|           |               | 1                                 | 2                                 | 3                                 | 1+2                 | 1+3        | 1+2+3        | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 1.117                             | 1.176                             | 0.630                             | See Note 1          | See Note 1 | See Note 1   | 0.01  | 0.01 | 0.02 |
|           | Top           | 1.070                             | 0.005                             | 0.000                             | 1.075               | 1.070      | 1.075        | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400                             | 0.425                             | 0.359                             | 0.825               | 0.759      | 1.184        | N/A   | N/A  | N/A  |
|           | Right         | 1.366                             | 0.057                             | 0.000                             | <b>1.423</b>        | 1.366      | <b>1.423</b> | N/A   | N/A  | N/A  |
|           | Left          | 0.556                             | 0.400                             | 0.080                             | 0.956               | 0.636      | 1.036        | N/A   | N/A  | N/A  |

| Simult Tx | Configuration | LTE Band 25<br>(PCS) SAR<br>(W/kg) | 5 GHz WLAN<br>Ant 1 SAR<br>(W/kg) | 5 GHz WLAN<br>Ant 2 SAR<br>(W/kg) | $\Sigma$ SAR (W/kg) |            |              | SPLSR |      |      |
|-----------|---------------|------------------------------------|-----------------------------------|-----------------------------------|---------------------|------------|--------------|-------|------|------|
|           |               | 1                                  | 2                                 | 3                                 | 1+2                 | 1+3        | 1+2+3        | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 1.181                              | 1.176                             | 0.630                             | See Note 1          | See Note 1 | See Note 1   | 0.01  | 0.01 | 0.02 |
|           | Top           | 0.939                              | 0.005                             | 0.000                             | 0.944               | 0.939      | 0.944        | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400                              | 0.425                             | 0.359                             | 0.825               | 0.759      | <b>1.184</b> | N/A   | N/A  | N/A  |
|           | Right         | 0.388                              | 0.057                             | 0.000                             | 0.445               | 0.388      | 0.445        | N/A   | N/A  | N/A  |
|           | Left          | 0.283                              | 0.400                             | 0.080                             | 0.683               | 0.363      | 0.763        | N/A   | N/A  | N/A  |

| Simult Tx | Configuration | LTE Band 7<br>SAR (W/kg) | 5 GHz WLAN<br>Ant 1 SAR<br>(W/kg) | 5 GHz WLAN<br>Ant 2 SAR<br>(W/kg) | $\Sigma$ SAR (W/kg) |              |            | SPLSR |      |      |
|-----------|---------------|--------------------------|-----------------------------------|-----------------------------------|---------------------|--------------|------------|-------|------|------|
|           |               | 1                        | 2                                 | 3                                 | 1+2                 | 1+3          | 1+2+3      | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 0.909                    | 1.176                             | 0.630                             | See Note 1          | <b>1.539</b> | See Note 1 | 0.01  | 0.01 | 0.02 |
|           | Top           | 0.576                    | 0.005                             | 0.000                             | 0.581               | 0.576        | 0.581      | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400                    | 0.425                             | 0.359                             | 0.825               | 0.759        | 1.184      | N/A   | N/A  | N/A  |
|           | Right         | 0.462                    | 0.057                             | 0.000                             | 0.519               | 0.462        | 0.519      | N/A   | N/A  | N/A  |
|           | Left          | 0.245                    | 0.400                             | 0.080                             | 0.645               | 0.325        | 0.725      | N/A   | N/A  | N/A  |

| Simult Tx | Configuration | LTE Band 41<br>SAR (W/kg) | 5 GHz WLAN<br>Ant 1 SAR<br>(W/kg) | 5 GHz WLAN<br>Ant 2 SAR<br>(W/kg) | $\Sigma$ SAR (W/kg) |            |              | SPLSR |      |      |
|-----------|---------------|---------------------------|-----------------------------------|-----------------------------------|---------------------|------------|--------------|-------|------|------|
|           |               | 1                         | 2                                 | 3                                 | 1+2                 | 1+3        | 1+2+3        | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 1.072                     | 1.176                             | 0.630                             | See Note 1          | See Note 1 | See Note 1   | 0.01  | 0.01 | 0.02 |
|           | Top           | 0.510                     | 0.005                             | 0.000                             | 0.515               | 0.510      | 0.515        | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400                     | 0.425                             | 0.359                             | 0.825               | 0.759      | <b>1.184</b> | N/A   | N/A  | N/A  |
|           | Right         | 0.366                     | 0.057                             | 0.000                             | 0.423               | 0.366      | 0.423        | N/A   | N/A  | N/A  |
|           | Left          | 0.137                     | 0.400                             | 0.080                             | 0.537               | 0.217      | 0.617        | N/A   | N/A  | N/A  |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | SAR EVALUATION REPORT        |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 82 of 100                  |

**Table 11-3**  
**Simultaneous Transmission Scenario with 2.4 GHz WLAN Ant 1 and 5 GHz WLAN Ant 2**

| Simult Tx | Configuration | EVDO BC10 (\$90S) SAR (W/kg) | 2.4 GHz WLAN Ant 1 SAR (W/kg) | 5 GHz WLAN Ant 2 SAR (W/kg) | $\Sigma$ SAR (W/kg) | SPLSR |      |      |
|-----------|---------------|------------------------------|-------------------------------|-----------------------------|---------------------|-------|------|------|
|           |               | 1                            | 2                             | 3                           | 1+2+3               | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 0.883                        | 0.557                         | 0.630                       | See Note 1          | 0.01  | 0.01 | 0.01 |
|           | Top           | 1.247                        | 0.011                         | 0.000                       | 1.258               | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400                        | 0.323                         | 0.359                       | 1.082               | N/A   | N/A  | N/A  |
|           | Right         | 0.278                        | 0.077                         | 0.000                       | 0.355               | N/A   | N/A  | N/A  |
|           | Left          | 0.150                        | 0.400                         | 0.080                       | 0.630               | N/A   | N/A  | N/A  |

| Simult Tx | Configuration | EVDO BC0 (\$22H) SAR (W/kg) | 2.4 GHz WLAN Ant 1 SAR (W/kg) | 5 GHz WLAN Ant 2 SAR (W/kg) | $\Sigma$ SAR (W/kg) | SPLSR |      |      |
|-----------|---------------|-----------------------------|-------------------------------|-----------------------------|---------------------|-------|------|------|
|           |               | 1                           | 2                             | 3                           | 1+2+3               | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 0.995                       | 0.557                         | 0.630                       | See Note 1          | 0.01  | 0.01 | 0.01 |
|           | Top           | 1.371                       | 0.011                         | 0.000                       | 1.382               | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400                       | 0.323                         | 0.359                       | 1.082               | N/A   | N/A  | N/A  |
|           | Right         | 0.297                       | 0.077                         | 0.000                       | 0.374               | N/A   | N/A  | N/A  |
|           | Left          | 0.178                       | 0.400                         | 0.080                       | 0.658               | N/A   | N/A  | N/A  |

| Simult Tx | Configuration | PCS EVDO SAR (W/kg) | 2.4 GHz WLAN Ant 1 SAR (W/kg) | 5 GHz WLAN Ant 2 SAR (W/kg) | $\Sigma$ SAR (W/kg) | SPLSR |      |      |
|-----------|---------------|---------------------|-------------------------------|-----------------------------|---------------------|-------|------|------|
|           |               | 1                   | 2                             | 3                           | 1+2+3               | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 1.088               | 0.557                         | 0.630                       | See Note 1          | 0.01  | 0.01 | 0.01 |
|           | Top           | 1.029               | 0.011                         | 0.000                       | 1.040               | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400               | 0.323                         | 0.359                       | 1.082               | N/A   | N/A  | N/A  |
|           | Right         | 1.032               | 0.077                         | 0.000                       | 1.109               | N/A   | N/A  | N/A  |
|           | Left          | 0.374               | 0.400                         | 0.080                       | 0.854               | N/A   | N/A  | N/A  |

| Simult Tx | Configuration | LTE Band 12 SAR (W/kg) | 2.4 GHz WLAN Ant 1 SAR (W/kg) | 5 GHz WLAN Ant 2 SAR (W/kg) | $\Sigma$ SAR (W/kg) | SPLSR |      |      |
|-----------|---------------|------------------------|-------------------------------|-----------------------------|---------------------|-------|------|------|
|           |               | 1                      | 2                             | 3                           | 1+2+3               | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 0.671                  | 0.557                         | 0.630                       | See Note 1          | 0.01  | 0.01 | 0.01 |
|           | Top           | 0.732                  | 0.011                         | 0.000                       | 0.743               | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400                  | 0.323                         | 0.359                       | 1.082               | N/A   | N/A  | N/A  |
|           | Right         | 0.188                  | 0.077                         | 0.000                       | 0.265               | N/A   | N/A  | N/A  |
|           | Left          | 0.250                  | 0.400                         | 0.080                       | 0.730               | N/A   | N/A  | N/A  |

| Simult Tx | Configuration | LTE Band 13 SAR (W/kg) | 2.4 GHz WLAN Ant 1 SAR (W/kg) | 5 GHz WLAN Ant 2 SAR (W/kg) | $\Sigma$ SAR (W/kg) | SPLSR |      |      |
|-----------|---------------|------------------------|-------------------------------|-----------------------------|---------------------|-------|------|------|
|           |               | 1                      | 2                             | 3                           | 1+2+3               | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 0.856                  | 0.557                         | 0.630                       | See Note 1          | 0.01  | 0.01 | 0.01 |
|           | Top           | 1.068                  | 0.011                         | 0.000                       | 1.079               | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400                  | 0.323                         | 0.359                       | 1.082               | N/A   | N/A  | N/A  |
|           | Right         | 0.281                  | 0.077                         | 0.000                       | 0.358               | N/A   | N/A  | N/A  |
|           | Left          | 0.219                  | 0.400                         | 0.080                       | 0.699               | N/A   | N/A  | N/A  |

| Simult Tx | Configuration | LTE Band 26 (Cell) SAR (W/kg) | 2.4 GHz WLAN Ant 1 SAR (W/kg) | 5 GHz WLAN Ant 2 SAR (W/kg) | $\Sigma$ SAR (W/kg) | SPLSR |      |      |
|-----------|---------------|-------------------------------|-------------------------------|-----------------------------|---------------------|-------|------|------|
|           |               | 1                             | 2                             | 3                           | 1+2+3               | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 1.034                         | 0.557                         | 0.630                       | See Note 1          | 0.01  | 0.01 | 0.01 |
|           | Top           | 1.352                         | 0.011                         | 0.000                       | 1.363               | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400                         | 0.323                         | 0.359                       | 1.082               | N/A   | N/A  | N/A  |
|           | Right         | 0.253                         | 0.077                         | 0.000                       | 0.330               | N/A   | N/A  | N/A  |
|           | Left          | 0.147                         | 0.400                         | 0.080                       | 0.627               | N/A   | N/A  | N/A  |

|                                      |                                                                                     |                                                                                                                    |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | <b>SAR EVALUATION REPORT</b>  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet                                                                                       | Page 83 of 100                  |

| Simult Tx | Configuration | LTE Band 5<br>(Cell) SAR<br>(W/kg) | 2.4 GHz<br>WLAN Ant 1<br>SAR (W/kg) | 5 GHz WLAN<br>Ant 2 SAR<br>(W/kg) | Σ SAR<br>(W/kg) | SPLSR |      |      |
|-----------|---------------|------------------------------------|-------------------------------------|-----------------------------------|-----------------|-------|------|------|
|           |               | 1                                  | 2                                   | 3                                 | 1+2+3           | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 1.063                              | 0.557                               | 0.630                             | See Note 1      | 0.01  | 0.01 | 0.01 |
|           | Top           | 1.398                              | 0.011                               | 0.000                             | 1.409           | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400                              | 0.323                               | 0.359                             | 1.082           | N/A   | N/A  | N/A  |
|           | Right         | 0.289                              | 0.077                               | 0.000                             | 0.366           | N/A   | N/A  | N/A  |
|           | Left          | 0.188                              | 0.400                               | 0.080                             | 0.668           | N/A   | N/A  | N/A  |

| Simult Tx | Configuration | LTE Band 4<br>(AWS) SAR<br>(W/kg) | 2.4 GHz<br>WLAN Ant 1<br>SAR (W/kg) | 5 GHz WLAN<br>Ant 2 SAR<br>(W/kg) | Σ SAR<br>(W/kg) | SPLSR |      |      |
|-----------|---------------|-----------------------------------|-------------------------------------|-----------------------------------|-----------------|-------|------|------|
|           |               | 1                                 | 2                                   | 3                                 | 1+2+3           | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 1.117                             | 0.557                               | 0.630                             | See Note 1      | 0.01  | 0.01 | 0.01 |
|           | Top           | 1.070                             | 0.011                               | 0.000                             | 1.081           | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400                             | 0.323                               | 0.359                             | 1.082           | N/A   | N/A  | N/A  |
|           | Right         | 1.366                             | 0.077                               | 0.000                             | 1.443           | N/A   | N/A  | N/A  |
|           | Left          | 0.556                             | 0.400                               | 0.080                             | 1.036           | N/A   | N/A  | N/A  |

| Simult Tx | Configuration | LTE Band 25<br>(PCS) SAR<br>(W/kg) | 2.4 GHz<br>WLAN Ant 1<br>SAR (W/kg) | 5 GHz WLAN<br>Ant 2 SAR<br>(W/kg) | Σ SAR<br>(W/kg) | SPLSR |      |      |
|-----------|---------------|------------------------------------|-------------------------------------|-----------------------------------|-----------------|-------|------|------|
|           |               | 1                                  | 2                                   | 3                                 | 1+2+3           | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 1.181                              | 0.557                               | 0.630                             | See Note 1      | 0.01  | 0.01 | 0.01 |
|           | Top           | 0.939                              | 0.011                               | 0.000                             | 0.950           | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400                              | 0.323                               | 0.359                             | 1.082           | N/A   | N/A  | N/A  |
|           | Right         | 0.388                              | 0.077                               | 0.000                             | 0.465           | N/A   | N/A  | N/A  |
|           | Left          | 0.283                              | 0.400                               | 0.080                             | 0.763           | N/A   | N/A  | N/A  |

| Simult Tx | Configuration | LTE Band 7<br>SAR (W/kg) | 2.4 GHz<br>WLAN Ant 1<br>SAR (W/kg) | 5 GHz WLAN<br>Ant 2 SAR<br>(W/kg) | Σ SAR<br>(W/kg) | SPLSR |      |      |
|-----------|---------------|--------------------------|-------------------------------------|-----------------------------------|-----------------|-------|------|------|
|           |               | 1                        | 2                                   | 3                                 | 1+2+3           | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 0.909                    | 0.557                               | 0.630                             | See Note 1      | 0.01  | 0.01 | 0.01 |
|           | Top           | 0.576                    | 0.011                               | 0.000                             | 0.587           | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400                    | 0.323                               | 0.359                             | 1.082           | N/A   | N/A  | N/A  |
|           | Right         | 0.462                    | 0.077                               | 0.000                             | 0.539           | N/A   | N/A  | N/A  |
|           | Left          | 0.245                    | 0.400                               | 0.080                             | 0.725           | N/A   | N/A  | N/A  |

| Simult Tx | Configuration | LTE Band 41<br>SAR (W/kg) | 2.4 GHz<br>WLAN Ant 1<br>SAR (W/kg) | 5 GHz WLAN<br>Ant 2 SAR<br>(W/kg) | Σ SAR<br>(W/kg) | SPLSR |      |      |
|-----------|---------------|---------------------------|-------------------------------------|-----------------------------------|-----------------|-------|------|------|
|           |               | 1                         | 2                                   | 3                                 | 1+2+3           | 1+2   | 1+3  | 2+3  |
| Body SAR  | Back          | 1.072                     | 0.557                               | 0.630                             | See Note 1      | 0.01  | 0.01 | 0.01 |
|           | Top           | 0.510                     | 0.011                               | 0.000                             | 0.521           | N/A   | N/A  | N/A  |
|           | Bottom        | 0.400                     | 0.323                               | 0.359                             | 1.082           | N/A   | N/A  | N/A  |
|           | Right         | 0.366                     | 0.077                               | 0.000                             | 0.443           | N/A   | N/A  | N/A  |
|           | Left          | 0.137                     | 0.400                               | 0.080                             | 0.617           | N/A   | N/A  | N/A  |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | SAR EVALUATION REPORT        |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 84 of 100                  |

**Table 11-4**  
**Simultaneous Transmission Scenario with Bluetooth**

| Simult Tx | Configuration | EVDO BC10 (\$90S) SAR (W/kg) | Bluetooth SAR (W/kg) | Σ SAR (W/kg) | Simult Tx | Configuration | EVDO BC0 (\$22H) SAR (W/kg) | Bluetooth SAR (W/kg) | Σ SAR (W/kg) |
|-----------|---------------|------------------------------|----------------------|--------------|-----------|---------------|-----------------------------|----------------------|--------------|
|           |               | 1                            | 2                    | 1+2          |           |               | 1                           | 2                    | 1+2          |
| Body SAR  | Back          | 0.883                        | 0.501                | <b>1.384</b> | Body SAR  | Back          | 0.995                       | 0.501                | <b>1.496</b> |
|           | Top           | 1.247                        | 0.000                | 1.247        |           | Top           | 1.371                       | 0.000                | 1.371        |
|           | Bottom        | 0.400                        | 0.190                | 0.590        |           | Bottom        | 0.400                       | 0.190                | 0.590        |
|           | Right         | 0.278                        | 0.048                | 0.326        |           | Right         | 0.297                       | 0.048                | 0.345        |
|           | Left          | 0.150                        | 0.400                | 0.550        |           | Left          | 0.178                       | 0.400                | 0.578        |

| Simult Tx | Configuration | PCS EVDO SAR (W/kg) | Bluetooth SAR (W/kg) | Σ SAR (W/kg) | Simult Tx | Configuration | LTE Band 12 SAR (W/kg) | Bluetooth SAR (W/kg) | Σ SAR (W/kg) |
|-----------|---------------|---------------------|----------------------|--------------|-----------|---------------|------------------------|----------------------|--------------|
|           |               | 1                   | 2                    | 1+2          |           |               | 1                      | 2                    | 1+2          |
| Body SAR  | Back          | 1.088               | 0.501                | <b>1.589</b> | Body SAR  | Back          | 0.671                  | 0.501                | <b>1.172</b> |
|           | Top           | 1.029               | 0.000                | 1.029        |           | Top           | 0.732                  | 0.000                | 0.732        |
|           | Bottom        | 0.400               | 0.190                | 0.590        |           | Bottom        | 0.400                  | 0.190                | 0.590        |
|           | Right         | 1.032               | 0.048                | 1.080        |           | Right         | 0.188                  | 0.048                | 0.236        |
|           | Left          | 0.374               | 0.400                | 0.774        |           | Left          | 0.250                  | 0.400                | 0.650        |

| Simult Tx | Configuration | LTE Band 13 SAR (W/kg) | Bluetooth SAR (W/kg) | Σ SAR (W/kg) | Simult Tx | Configuration | LTE Band 26 (Cell) SAR (W/kg) | Bluetooth SAR (W/kg) | Σ SAR (W/kg) |
|-----------|---------------|------------------------|----------------------|--------------|-----------|---------------|-------------------------------|----------------------|--------------|
|           |               | 1                      | 2                    | 1+2          |           |               | 1                             | 2                    | 1+2          |
| Body SAR  | Back          | 0.856                  | 0.501                | <b>1.357</b> | Body SAR  | Back          | 1.034                         | 0.501                | <b>1.535</b> |
|           | Top           | 1.068                  | 0.000                | 1.068        |           | Top           | 1.352                         | 0.000                | 1.352        |
|           | Bottom        | 0.400                  | 0.190                | 0.590        |           | Bottom        | 0.400                         | 0.190                | 0.590        |
|           | Right         | 0.281                  | 0.048                | 0.329        |           | Right         | 0.253                         | 0.048                | 0.301        |
|           | Left          | 0.219                  | 0.400                | 0.619        |           | Left          | 0.147                         | 0.400                | 0.547        |

| Simult Tx | Configuration | LTE Band 5 (Cell) SAR (W/kg) | Bluetooth SAR (W/kg) | Σ SAR (W/kg) |
|-----------|---------------|------------------------------|----------------------|--------------|
|           |               | 1                            | 2                    | 1+2          |
| Body SAR  | Back          | 1.063                        | 0.501                | <b>1.564</b> |
|           | Top           | 1.398                        | 0.000                | 1.398        |
|           | Bottom        | 0.400                        | 0.190                | 0.590        |
|           | Right         | 0.289                        | 0.048                | 0.337        |
|           | Left          | 0.188                        | 0.400                | 0.588        |

| Simult Tx | Configuration | LTE Band 4 (AWS) SAR (W/kg) | Bluetooth SAR (W/kg) | Σ SAR (W/kg) | SPLSR |
|-----------|---------------|-----------------------------|----------------------|--------------|-------|
|           |               | 1                           | 2                    | 1+2          | 1+2   |
| Body SAR  | Back          | 1.117                       | 0.501                | See Note 1   | 0.01  |
|           | Top           | 1.070                       | 0.000                | 1.070        | N/A   |
|           | Bottom        | 0.400                       | 0.190                | 0.590        | N/A   |
|           | Right         | 1.366                       | 0.048                | <b>1.414</b> | N/A   |
|           | Left          | 0.556                       | 0.400                | 0.956        | N/A   |

|                                      |                                                                                     |                              |                                                                                       |                                        |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: A3LSMT837P                   |  | <b>SAR EVALUATION REPORT</b> |  | <b>Approved by:</b><br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet | Page 85 of 100                                                                        |                                        |

| Simult Tx | Configuration | LTE Band 25<br>(PCS) SAR<br>(W/kg) | Bluetooth<br>SAR (W/kg) | Σ SAR<br>(W/kg) | SPLSR |
|-----------|---------------|------------------------------------|-------------------------|-----------------|-------|
|           |               | 1                                  | 2                       | 1+2             | 1+2   |
| Body SAR  | Back          | 1.181                              | 0.501                   | See Note 1      | 0.01  |
|           | Top           | 0.939                              | 0.000                   | <b>0.939</b>    | N/A   |
|           | Bottom        | 0.400                              | 0.190                   | 0.590           | N/A   |
|           | Right         | 0.388                              | 0.048                   | 0.436           | N/A   |
|           | Left          | 0.283                              | 0.400                   | 0.683           | N/A   |

| Simult Tx | Configuration | LTE Band 7<br>SAR (W/kg) | Bluetooth<br>SAR (W/kg) | Σ SAR<br>(W/kg) | Simult Tx | Configuration | LTE Band 41<br>SAR (W/kg) | Bluetooth<br>SAR (W/kg) | Σ SAR<br>(W/kg) |
|-----------|---------------|--------------------------|-------------------------|-----------------|-----------|---------------|---------------------------|-------------------------|-----------------|
|           |               | 1                        | 2                       | 1+2             |           |               | 1                         | 2                       | 1+2             |
| Body SAR  | Back          | 0.909                    | 0.501                   | <b>1.410</b>    | Body SAR  | Back          | 1.072                     | 0.501                   | <b>1.573</b>    |
|           | Top           | 0.576                    | 0.000                   | 0.576           |           | Top           | 0.510                     | 0.000                   | 0.510           |
|           | Bottom        | 0.400                    | 0.190                   | 0.590           |           | Bottom        | 0.400                     | 0.190                   | 0.590           |
|           | Right         | 0.462                    | 0.048                   | 0.510           |           | Right         | 0.366                     | 0.048                   | 0.414           |
|           | Left          | 0.245                    | 0.400                   | 0.645           |           | Left          | 0.137                     | 0.400                   | 0.537           |

Notes:

1. No evaluation was performed to determine the aggregate 1g SAR for these configurations as the SPLS ratio between the antenna pairs was not greater than 0.04 per FCC KDB 447498 D01v06. See Section 11.4 for detailed SPLS ratio analysis.
2. For SAR summation, the highest reported SAR across all test distances was used as the most conservative evaluation for simultaneous transmission analysis for each device edge.
3. When the antenna separation distance was > 50 mm, an estimated SAR of 0.4 W/kg was used to determine the simultaneous transmission SAR exclusion for test positions excluded per FCC KDB Publication 447498 D01v06.

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | SAR EVALUATION REPORT        |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 86 of 100                  |

## 11.4 SPLSR Evaluation and Analysis

Per FCC KDB Publication 447498 D01v06, when the sum of the standalone transmitters is more than 1.6 W/kg for 1g, the SAR sum to peak locations can be analyzed to determine SAR distribution overlaps. When the SAR peak to location ratio (shown below) for each pair of antennas is  $\leq 0.04$  for 1g, simultaneous SAR evaluation is not required. The distance between the transmitters was calculated using the following formula.

$$\text{Distance}_{\text{Tx1} - \text{Tx2}} = R_i = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2}$$

$$\text{SPLS Ratio} = \frac{(SAR_1 + SAR_2)^{1.5}}{R_i}$$

### 11.4.1 Back Side SPLSR Evaluation and Analysis

**Table 11-5**  
**Peak SAR Locations for Body Back Side**

| Mode/Band          | x (mm) | y (mm)  |
|--------------------|--------|---------|
| 2.4 GHz WLAN Ant 1 | -68.00 | -112.00 |
| 2.4 GHz WLAN Ant 2 | 29.20  | -122.80 |
| 5 GHz WLAN Ant 1   | -64.00 | -120.00 |
| 5 GHz WLAN Ant 2   | 36.00  | -119.00 |
| Bluetooth          | -63.00 | -114.80 |
| EVDO BC10 (\$90S)  | -26.00 | 125.50  |
| EVDO BC0 (\$22H)   | -21.50 | 127.00  |
| PCS EVDO           | -35.00 | 116.50  |
| LTE Band 12        | -20.00 | 130.00  |
| LTE Band 13        | -23.00 | 128.50  |
| LTE Band 26 (Cell) | -21.50 | 127.00  |
| LTE Band 5 (Cell)  | -20.00 | 127.00  |
| LTE Band 4 (AWS)   | -38.00 | 116.50  |
| LTE Band 25 (PCS)  | -41.50 | 124.50  |
| LTE Band 7         | -42.80 | 120.40  |
| LTE Band 41        | -47.80 | 121.60  |

|                                             |                                                                                                                                                                                                        |                                        |
|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> A3LSMT837P                   |  <b>SAR EVALUATION REPORT</b>  | <b>Approved by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>1M1806060119-01.A3L | <b>Test Dates:</b><br>06/11/18 - 06/26/18                                                                                                                                                              | <b>DUT Type:</b><br>Portable Tablet    |
|                                             |                                                                                                                                                                                                        | Page 87 of 100                         |

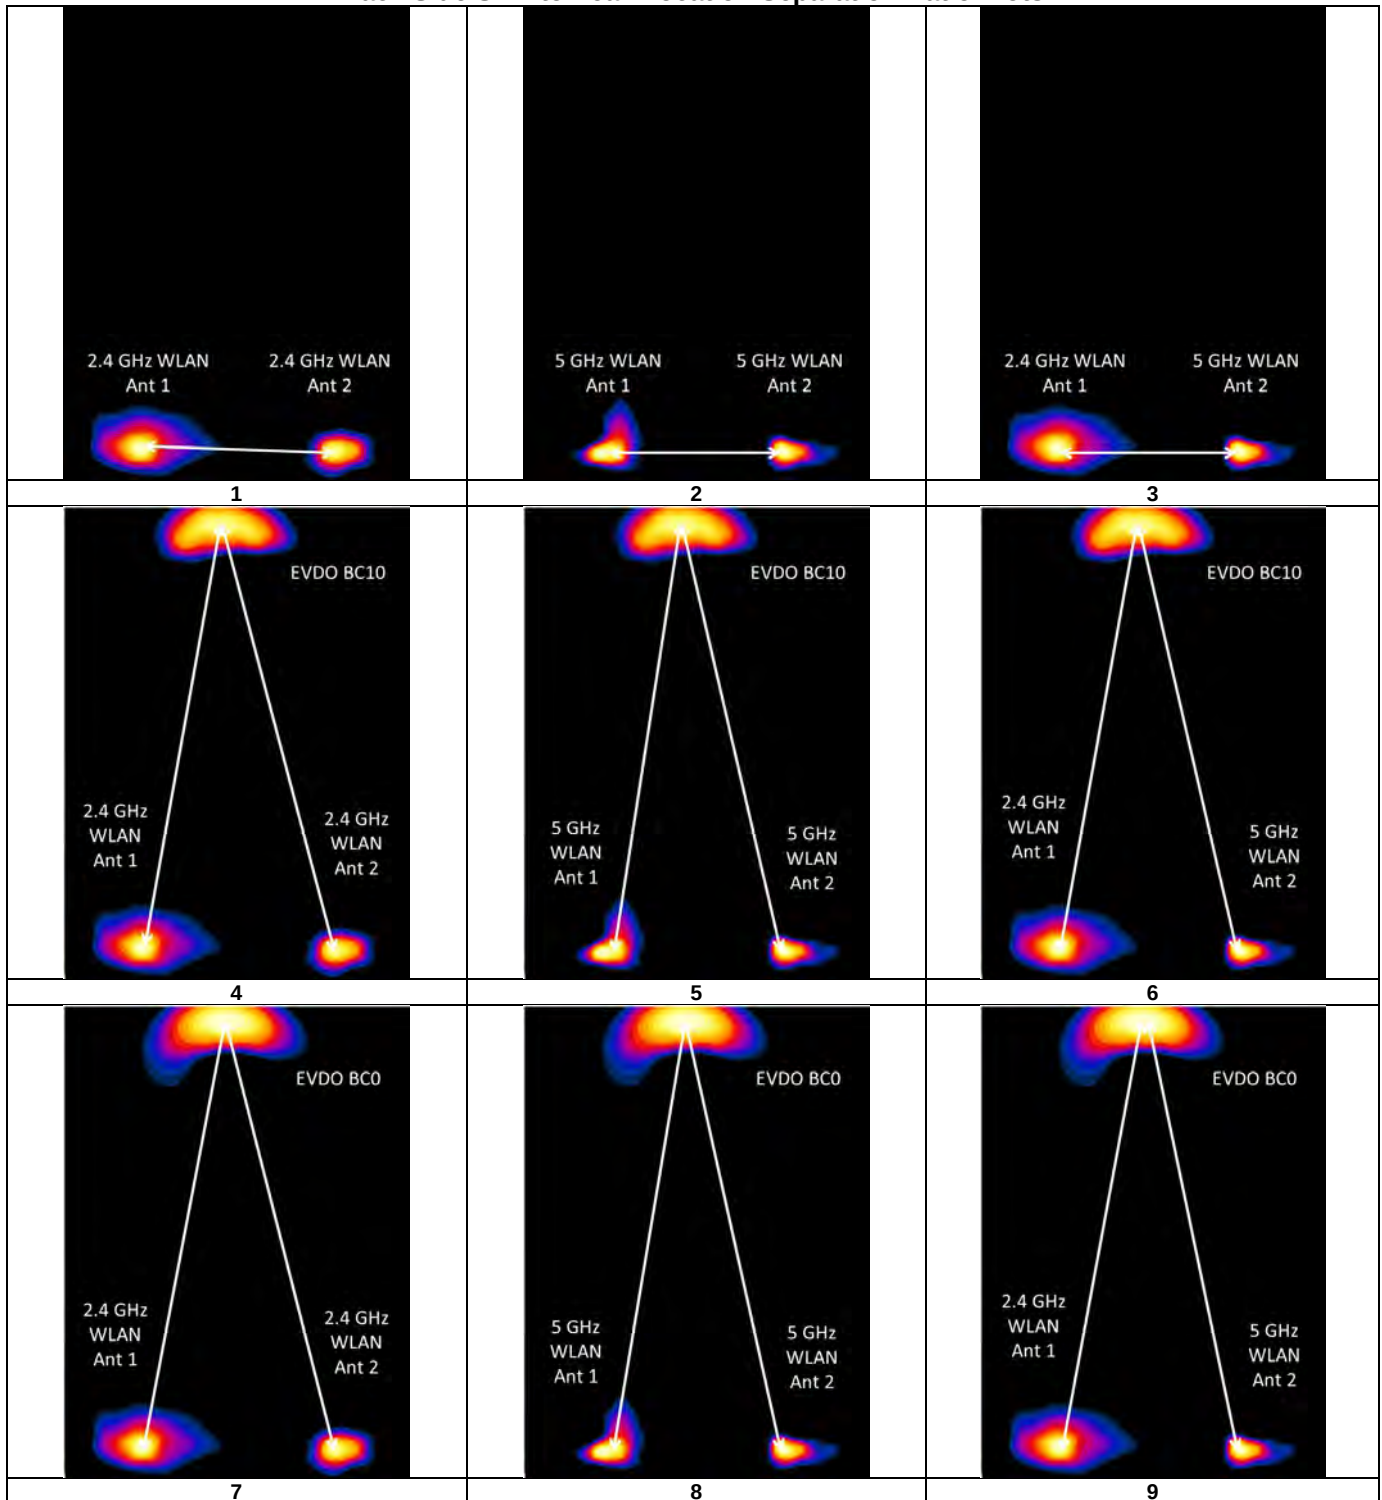


**Table 11-6**  
**Back Side SAR to Peak Location Separation Ratio Calculations**


| Antenna Pair       |                    | Standalone SAR (W/kg) |       | Standalone SAR Sum (W/kg) | Peak SAR Separation Distance (mm) | SPLS Ratio                             | Plot Number |
|--------------------|--------------------|-----------------------|-------|---------------------------|-----------------------------------|----------------------------------------|-------------|
| Ant "a"            | Ant "b"            | a                     | b     | a+b                       | D <sub>a-b</sub>                  | (a+b) <sup>1.5</sup> /D <sub>a-b</sub> |             |
| 2.4 GHz WLAN Ant 1 | 2.4 GHz WLAN Ant 2 | 0.557                 | 0.585 | 1.142                     | 97.80                             | 0.01                                   | 1           |
| 5 GHz WLAN Ant 1   | 5 GHz WLAN Ant 2   | 1.176                 | 0.63  | 1.806                     | 100.00                            | 0.02                                   | 2           |
| 2.4 GHz WLAN Ant 1 | 5 GHz WLAN Ant 2   | 0.557                 | 0.63  | 1.187                     | 104.24                            | 0.01                                   | 3           |
| 2.4 GHz WLAN Ant 1 | EVDO BC10 (\$90S)  | 0.557                 | 0.883 | 1.440                     | 241.19                            | 0.01                                   | 4, 6        |
| 2.4 GHz WLAN Ant 2 | EVDO BC10 (\$90S)  | 0.585                 | 0.883 | 1.468                     | 254.36                            | 0.01                                   | 4           |
| 5 GHz WLAN Ant 1   | EVDO BC10 (\$90S)  | 1.176                 | 0.883 | 2.059                     | 248.42                            | 0.01                                   | 5           |
| 5 GHz WLAN Ant 2   | EVDO BC10 (\$90S)  | 0.63                  | 0.883 | 1.513                     | 252.24                            | 0.01                                   | 5, 6        |
| 2.4 GHz WLAN Ant 1 | EVDO BC0 (\$22H)   | 0.557                 | 0.995 | 1.552                     | 243.48                            | 0.01                                   | 7, 9        |
| 2.4 GHz WLAN Ant 2 | EVDO BC0 (\$22H)   | 0.585                 | 0.995 | 1.580                     | 254.89                            | 0.01                                   | 7           |
| 5 GHz WLAN Ant 1   | EVDO BC0 (\$22H)   | 1.176                 | 0.995 | 2.171                     | 250.63                            | 0.01                                   | 8           |
| 5 GHz WLAN Ant 2   | EVDO BC0 (\$22H)   | 0.63                  | 0.995 | 1.625                     | 252.63                            | 0.01                                   | 8, 9        |
| 2.4 GHz WLAN Ant 1 | PCS EVDO           | 0.557                 | 1.088 | 1.645                     | 230.87                            | 0.01                                   | 10, 12      |
| 2.4 GHz WLAN Ant 2 | PCS EVDO           | 0.585                 | 1.088 | 1.673                     | 247.76                            | 0.01                                   | 10          |
| 5 GHz WLAN Ant 1   | PCS EVDO           | 1.176                 | 1.088 | 2.264                     | 238.27                            | 0.01                                   | 11          |
| 5 GHz WLAN Ant 2   | PCS EVDO           | 0.63                  | 1.088 | 1.718                     | 245.97                            | 0.01                                   | 11, 12      |
| 2.4 GHz WLAN Ant 1 | LTE Band 12        | 0.557                 | 0.671 | 1.228                     | 246.71                            | 0.01                                   | 13, 15      |
| 2.4 GHz WLAN Ant 2 | LTE Band 12        | 0.585                 | 0.671 | 1.256                     | 257.54                            | 0.01                                   | 13          |
| 5 GHz WLAN Ant 1   | LTE Band 12        | 1.176                 | 0.671 | 1.847                     | 253.84                            | 0.01                                   | 14          |
| 5 GHz WLAN Ant 2   | LTE Band 12        | 0.63                  | 0.671 | 1.301                     | 255.22                            | 0.01                                   | 14, 15      |
| 2.4 GHz WLAN Ant 1 | LTE Band 13        | 0.557                 | 0.856 | 1.413                     | 244.67                            | 0.01                                   | 16, 18      |
| 2.4 GHz WLAN Ant 2 | LTE Band 13        | 0.585                 | 0.856 | 1.441                     | 256.66                            | 0.01                                   | 16          |
| 5 GHz WLAN Ant 1   | LTE Band 13        | 1.176                 | 0.856 | 2.032                     | 251.86                            | 0.01                                   | 17          |
| 5 GHz WLAN Ant 2   | LTE Band 13        | 0.63                  | 0.856 | 1.486                     | 254.44                            | 0.01                                   | 17, 18      |
| 2.4 GHz WLAN Ant 1 | LTE Band 26 (Cell) | 0.557                 | 1.034 | 1.591                     | 243.48                            | 0.01                                   | 19, 21      |
| 2.4 GHz WLAN Ant 2 | LTE Band 26 (Cell) | 0.585                 | 1.034 | 1.619                     | 254.89                            | 0.01                                   | 19          |
| 5 GHz WLAN Ant 1   | LTE Band 26 (Cell) | 1.176                 | 1.034 | 2.210                     | 250.63                            | 0.01                                   | 20          |
| 5 GHz WLAN Ant 2   | LTE Band 26 (Cell) | 0.63                  | 1.034 | 1.664                     | 252.63                            | 0.01                                   | 20, 21      |
| 2.4 GHz WLAN Ant 1 | LTE Band 5 (Cell)  | 0.557                 | 1.063 | 1.620                     | 243.77                            | 0.01                                   | 22, 24      |
| 2.4 GHz WLAN Ant 2 | LTE Band 5 (Cell)  | 0.585                 | 1.063 | 1.648                     | 254.60                            | 0.01                                   | 22          |
| 5 GHz WLAN Ant 1   | LTE Band 5 (Cell)  | 1.176                 | 1.063 | 2.239                     | 250.89                            | 0.01                                   | 23          |
| 5 GHz WLAN Ant 2   | LTE Band 5 (Cell)  | 0.63                  | 1.063 | 1.693                     | 252.29                            | 0.01                                   | 23, 24      |
| 2.4 GHz WLAN Ant 1 | LTE Band 4 (AWS)   | 0.557                 | 1.117 | 1.674                     | 230.46                            | 0.01                                   | 25, 27      |
| 2.4 GHz WLAN Ant 2 | LTE Band 4 (AWS)   | 0.585                 | 1.117 | 1.702                     | 248.56                            | 0.01                                   | 25          |
| 5 GHz WLAN Ant 1   | LTE Band 4 (AWS)   | 1.176                 | 1.117 | 2.293                     | 237.92                            | 0.01                                   | 26          |
| 5 GHz WLAN Ant 2   | LTE Band 4 (AWS)   | 0.63                  | 1.117 | 1.747                     | 246.85                            | 0.01                                   | 26, 27      |
| 2.4 GHz WLAN Ant 1 | LTE Band 25 (PCS)  | 0.557                 | 1.181 | 1.738                     | 237.98                            | 0.01                                   | 28, 30      |
| 2.4 GHz WLAN Ant 2 | LTE Band 25 (PCS)  | 0.585                 | 1.181 | 1.766                     | 257.21                            | 0.01                                   | 28          |
| 5 GHz WLAN Ant 1   | LTE Band 25 (PCS)  | 1.176                 | 1.181 | 2.357                     | 245.53                            | 0.01                                   | 29          |
| 5 GHz WLAN Ant 2   | LTE Band 25 (PCS)  | 0.63                  | 1.181 | 1.811                     | 255.54                            | 0.01                                   | 29, 30      |
| 2.4 GHz WLAN Ant 1 | LTE Band 7         | 0.557                 | 0.909 | 1.466                     | 233.76                            | 0.01                                   | 31, 33      |
| 2.4 GHz WLAN Ant 2 | LTE Band 7         | 0.585                 | 0.909 | 1.494                     | 253.63                            | 0.01                                   | 31          |
| 5 GHz WLAN Ant 1   | LTE Band 7         | 1.176                 | 0.909 | 2.085                     | 241.33                            | 0.01                                   | 32          |
| 5 GHz WLAN Ant 2   | LTE Band 7         | 0.63                  | 0.909 | 1.539                     | 252.04                            | 0.01                                   | 32, 33      |
| 2.4 GHz WLAN Ant 1 | LTE Band 41        | 0.557                 | 1.072 | 1.629                     | 234.47                            | 0.01                                   | 34, 36      |
| 2.4 GHz WLAN Ant 2 | LTE Band 41        | 0.585                 | 1.072 | 1.657                     | 256.24                            | 0.01                                   | 34          |
| 5 GHz WLAN Ant 1   | LTE Band 41        | 1.176                 | 1.072 | 2.248                     | 242.14                            | 0.01                                   | 35          |
| 5 GHz WLAN Ant 2   | LTE Band 41        | 0.63                  | 1.072 | 1.702                     | 254.78                            | 0.01                                   | 35, 36      |
| Bluetooth          | LTE Band 4 (AWS)   | 0.501                 | 1.117 | 1.618                     | 232.65                            | 0.01                                   | 37          |
| Bluetooth          | LTE Band 25 (PCS)  | 0.501                 | 1.181 | 1.682                     | 240.26                            | 0.01                                   | 38          |

|                                      |                                                                                                                                                                                                        |                                 |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  <b>SAR EVALUATION REPORT</b>  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                                                                                                                                     | DUT Type:<br>Portable Tablet    |
| Page 88 of 100                       |                                                                                                                                                                                                        |                                 |


**Table 11-7**  
**Back Side SAR to Peak Location Separation Ratio Plots**



|                                      |                                                                                                                                                                                                        |                                 |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  <b>SAR EVALUATION REPORT</b>  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                                                                                                                                     | DUT Type:<br>Portable Tablet    |
| Page 89 of 100                       |                                                                                                                                                                                                        |                                 |

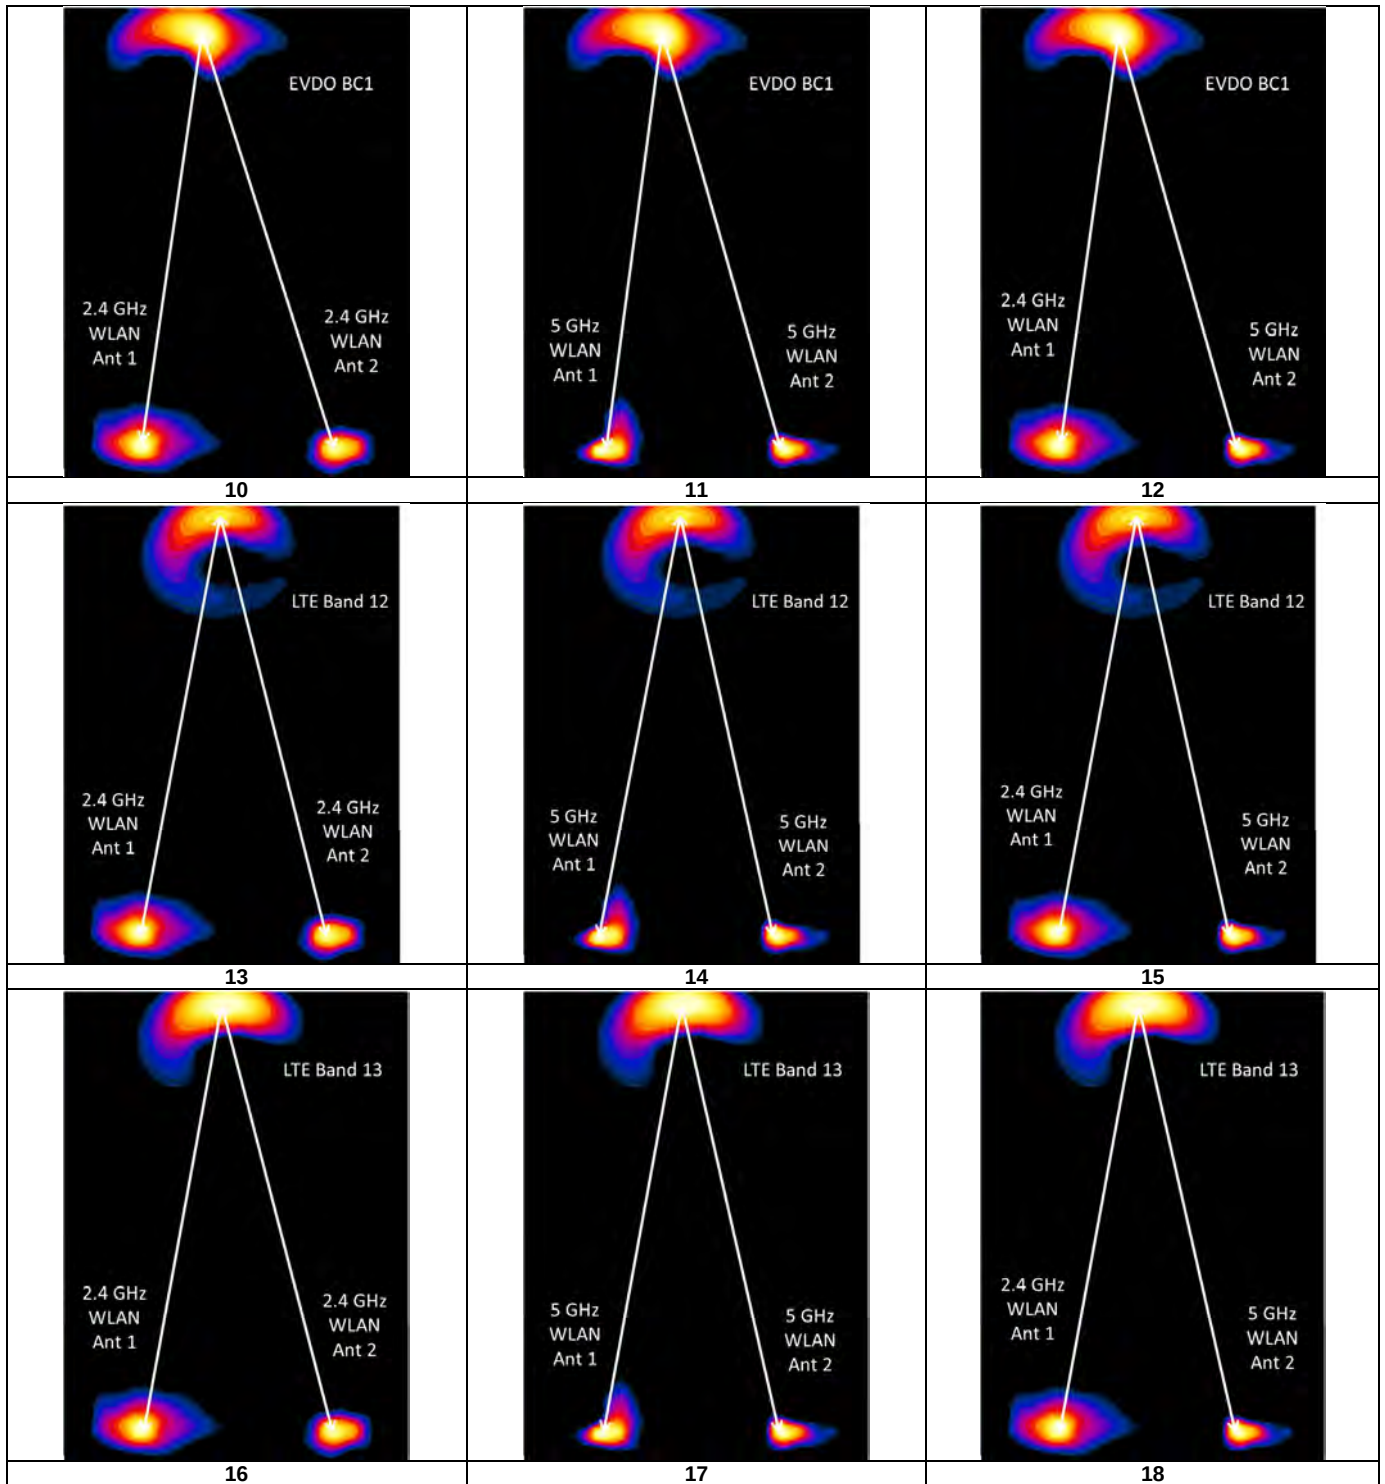


|                                      |                                                                                                                                                                                                        |                              |                                 |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  <b>SAR EVALUATION REPORT</b>  |                              | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                                                                                                                                     | DUT Type:<br>Portable Tablet | Page 90 of 100                  |

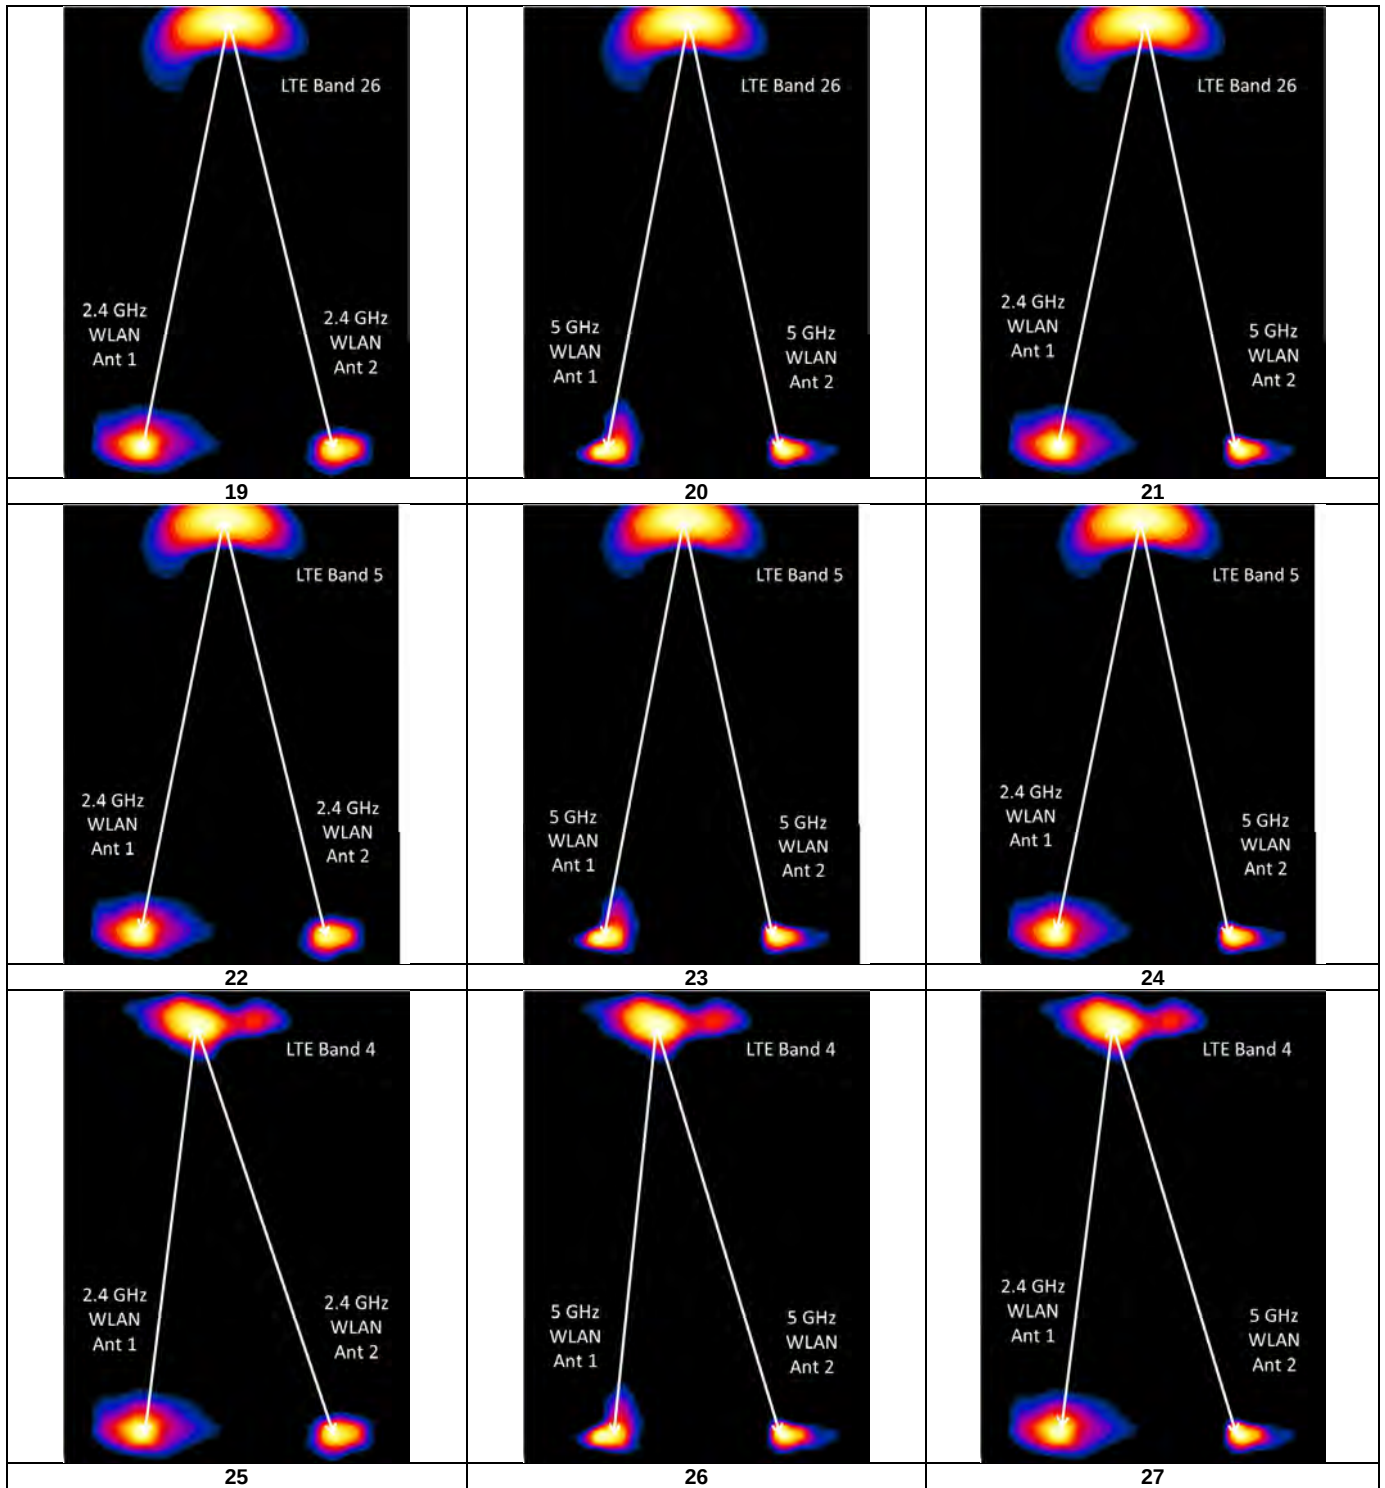


|                                      |                                                                                                                                   |                              |                                                                                       |                                 |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>SAR EVALUATION REPORT</b> |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                                                                | DUT Type:<br>Portable Tablet |                                                                                       | Page 91 of 100                  |



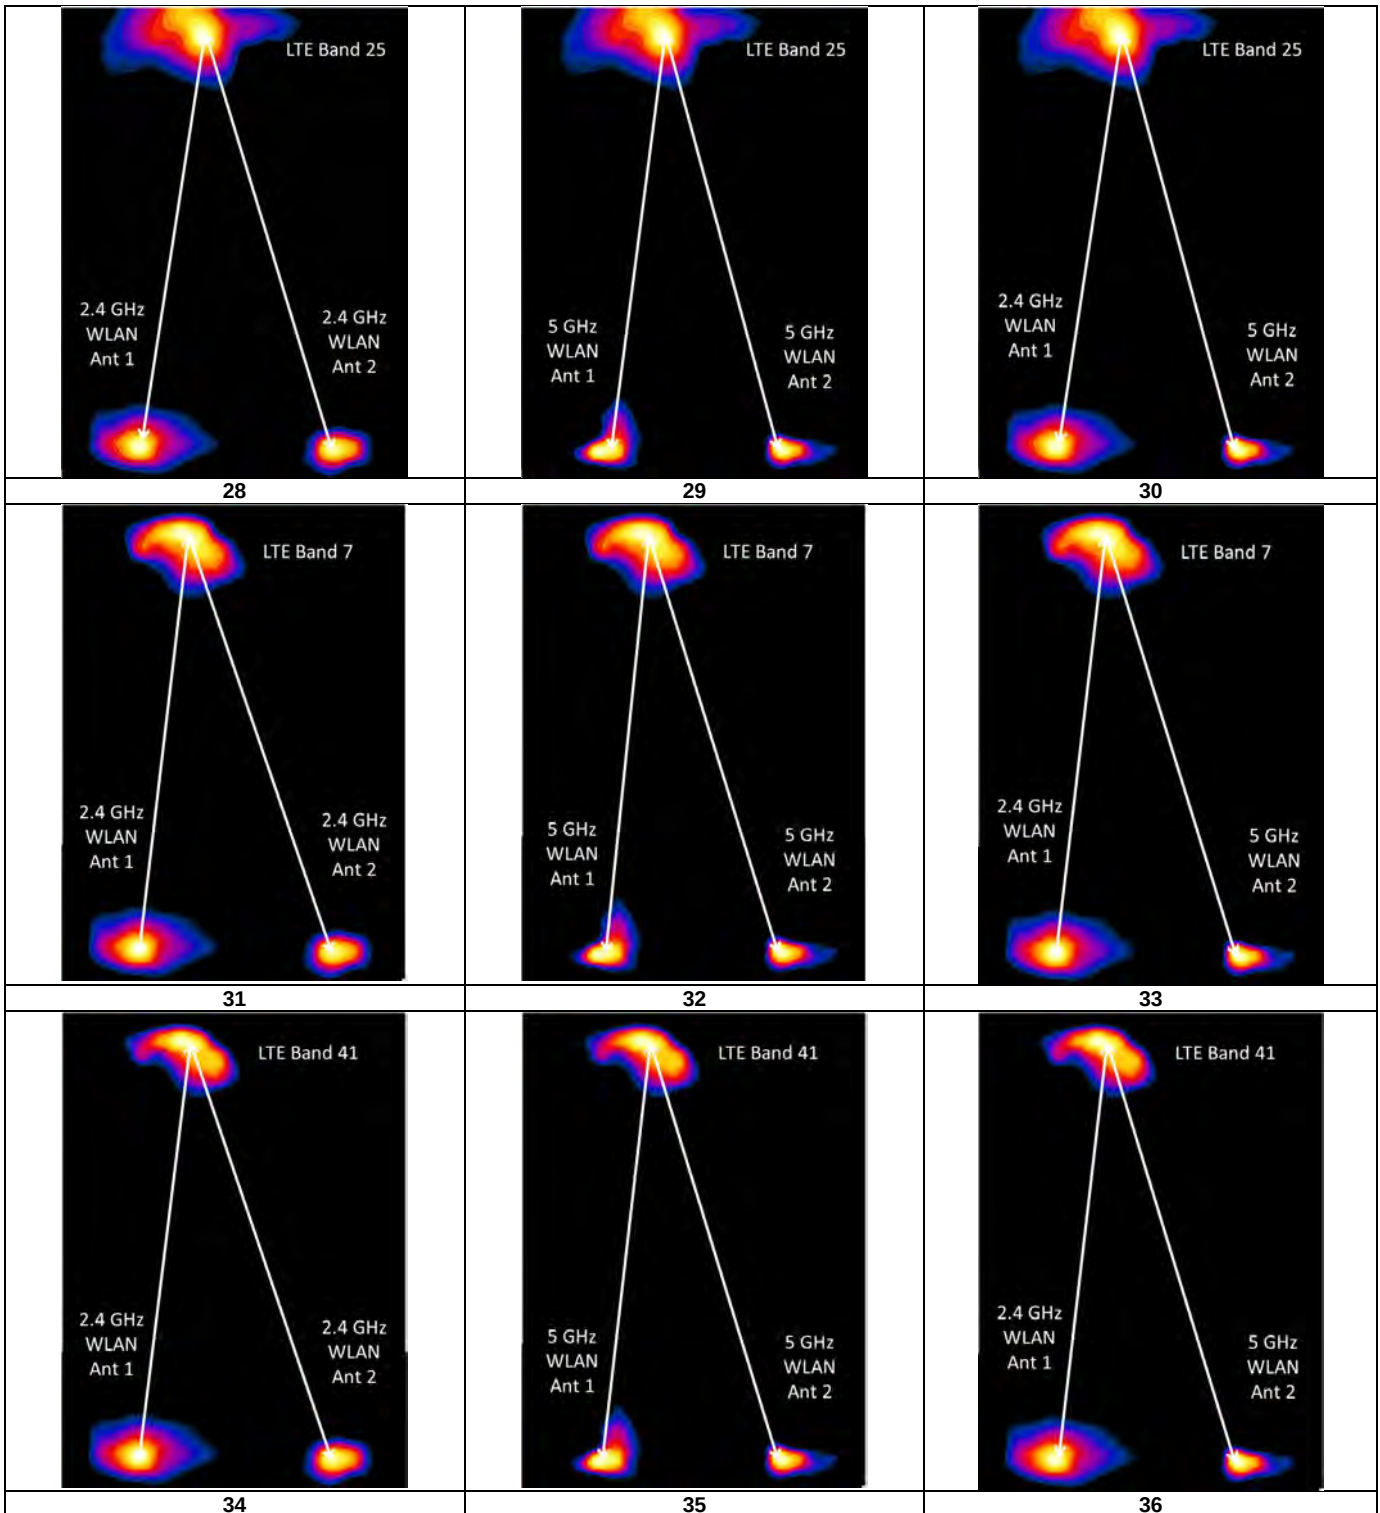

|                                      |                                                                                                                                                                                                        |                              |                                 |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  <b>SAR EVALUATION REPORT</b>  |                              | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                                                                                                                                     | DUT Type:<br>Portable Tablet | Page 92 of 100                  |

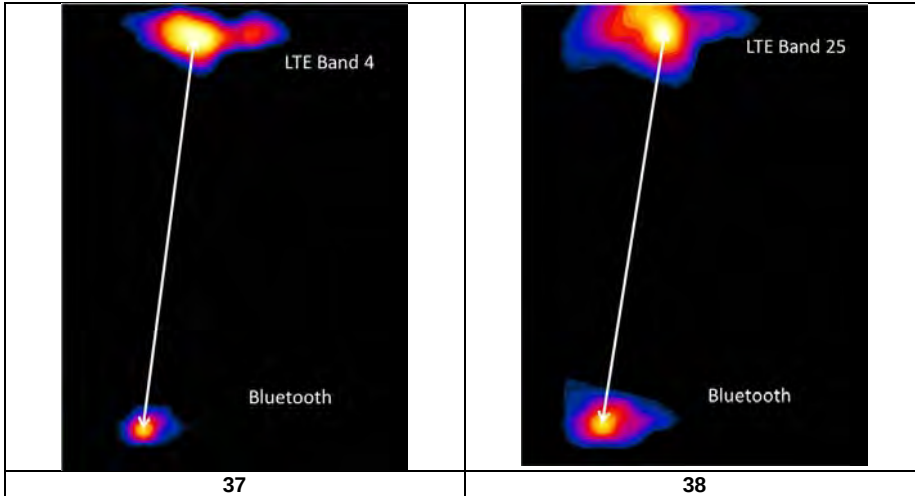

### 11.5 Simultaneous Transmission Conclusion

The above numerical summed SAR results and SPLSR analysis are sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528- 2013 Section 6.3.4.1.

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | SAR EVALUATION REPORT        |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet | Page 93 of 100                                                                        |                                 |

## 12 SAR MEASUREMENT VARIABILITY

### 12.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .
- 4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg

**Table 12-1**  
**Body SAR Measurement Variability Results**

| BODY VARIABILITY RESULTS                                                                          |                   |           |       |                                     |                           |                  |       |         |                                                 |                       |       |                       |       |                       |       |
|---------------------------------------------------------------------------------------------------|-------------------|-----------|-------|-------------------------------------|---------------------------|------------------|-------|---------|-------------------------------------------------|-----------------------|-------|-----------------------|-------|-----------------------|-------|
| Band                                                                                              | Component Carrier | FREQUENCY |       | Mode                                | Service                   | Data Rate (Mbps) | Side  | Spacing | Measured SAR (1g)                               | 1st Repeated SAR (1g) | Ratio | 2nd Repeated SAR (1g) | Ratio | 3rd Repeated SAR (1g) | Ratio |
|                                                                                                   |                   | MHz       | Ch.   |                                     |                           |                  |       |         | (W/kg)                                          | (W/kg)                |       | (W/kg)                |       |                       |       |
|                                                                                                   |                   |           |       |                                     |                           |                  |       |         |                                                 |                       |       |                       |       |                       |       |
| 750                                                                                               | N/A               | 782.00    | 23230 | LTE Band 13, 10 MHz Bandwidth       | QPSK, 1 RB, 0 RB Offset   | N/A              | top   | 16 mm   | 0.905                                           | 0.888                 | 1.02  | N/A                   | N/A   | N/A                   | N/A   |
| 835                                                                                               | N/A               | 824.70    | 1013  | CDMA BC0 (\$22H)                    | EVDO Rev. 0               | N/A              | top   | 16 mm   | 1.170                                           | 1.160                 | 1.01  | N/A                   | N/A   | N/A                   | N/A   |
| 1750                                                                                              | N/A               | 1732.50   | 20175 | LTE Band 4 (AWS), 20 MHz Bandwidth  | QPSK, 1 RB, 0 RB Offset   | N/A              | right | 0 mm    | 1.100                                           | 1.100                 | 1.00  | N/A                   | N/A   | N/A                   | N/A   |
| 1900                                                                                              | N/A               | 1905.00   | 26590 | LTE Band 25 (PCS), 20 MHz Bandwidth | QPSK, 50 RB, 0 RB Offset  | N/A              | back  | 0 mm    | 0.971                                           | 1.010                 | 1.04  | N/A                   | N/A   | N/A                   | N/A   |
| 2450                                                                                              | N/A               | 2506.00   | 39750 | LTE Band 41, 20 MHz Bandwidth       | QPSK, 50 RB, 0 RB Offset  | N/A              | back  | 0 mm    | 0.823                                           | 0.754                 | 1.09  | N/A                   | N/A   | N/A                   | N/A   |
| 2600                                                                                              | PCC               | 2680.00   | 41490 | LTE Band 41, 20 MHz Bandwidth       | QPSK, 50 RB, 0 RB Offset  | N/A              | back  | 0 mm    | 0.901                                           | 0.844                 | 1.07  | N/A                   | N/A   | N/A                   | N/A   |
|                                                                                                   | SCC               | 2660.20   | 41292 |                                     | QPSK, 50 RB, 50 RB Offset |                  |       |         |                                                 |                       |       |                       |       |                       |       |
| 5750                                                                                              | N/A               | 5775.00   | 155   | 802.11ac, 80 MHz Bandwidth          | OFDM, ANT 1               | 29.3             | back  | 0 mm    | 0.861                                           | 0.866                 | 1.01  | N/A                   | N/A   | N/A                   | N/A   |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population |                   |           |       |                                     |                           |                  |       |         | Body<br>1.6 W/kg (mW/g)<br>averaged over 1 gram |                       |       |                       |       |                       |       |

### 12.2 Measurement Uncertainty

The measured SAR was  $< 1.5$  W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | SAR EVALUATION REPORT        |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 94 of 100                  |

## 13 ADDITIONAL TESTING PER FCC GUIDANCE

### 13.1 LTE Band 41 Power Class 2 and Power Class 3 Linearity


This device supports Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operations is 43.3 % using UL-DL configuration 1. Per May 2017 TCB Workshop Notes based on the device behavior, all SAR tests were performed using Power Class 3. SAR with Power Class 2 at the highest power and available duty factor was additionally performed for the Power Class 3 configuration with the highest SAR for each exposure condition. The linearity between the Power Class 2 and Power Class 3 SAR results and the respective frame averaged powers was calculated to determine that the results were linear. Per May 2017 TCB Workshop, no additional SAR measurements were required since the linearity between power classes as < 10% and all reported SAR values were < 1.4 W/kg for 1g and < 3.5 W/kg for 10g.

LTE Band 41 SAR testing with power class 2 at the highest power and available duty factor was additionally performed for the power class 3 configuration with the highest SAR for each exposure condition.

**Table 13-1**  
**LTE Band 41 Body Linearity Data**

|                                     | LTE Band 41 PC3 | LTE Band 41 PC2 |
|-------------------------------------|-----------------|-----------------|
| Maximum Allowed Output Power (dBm)  | 15              | 15              |
| Measured Output Power (dBm)         | 13.85           | 13.87           |
| Measured SAR (W/kg)                 | 0.823           | 0.566           |
| Measured Power (mW)                 | 24.27           | 24.38           |
| Duty Cycle                          | 63.3%           | 43.3%           |
| Frame Averaged Output Power (mW)    | 15.36           | 10.56           |
| % deviation from expected linearity |                 | 0.08%           |

**Figure 13-1**  
**LTE Band 41 Body Linearity**

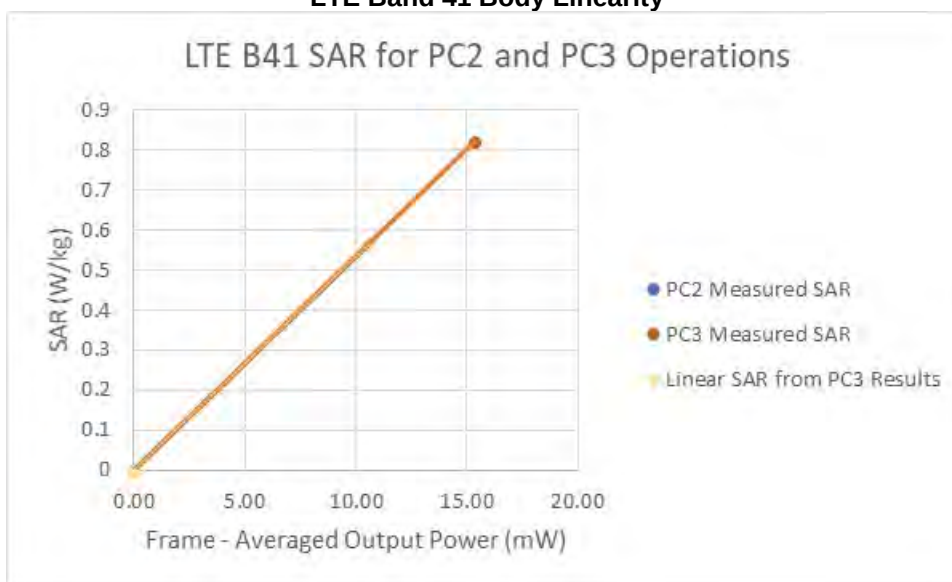

|                                      |                                                                                                                                   |                              |                                                                                       |                                        |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: A3LSMT837P                   |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>SAR EVALUATION REPORT</b> |  | <b>Approved by:</b><br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                                                                | DUT Type:<br>Portable Tablet |                                                                                       | Page 95 of 100                         |



# 14 EQUIPMENT LIST

| Manufacturer       | Model     | Description                                     | Cal Date   | Cal Interval | Cal Due    | Serial Number |
|--------------------|-----------|-------------------------------------------------|------------|--------------|------------|---------------|
| Agilent            | 8594A     | (9kHz-2.9GHz) Spectrum Analyzer                 | N/A        | N/A          | N/A        | 3051A00187    |
| Agilent            | 8753ES    | S-Parameter Vector Network Analyzer             | 8/17/2017  | Annual       | 8/17/2018  | MY40003841    |
| Agilent            | 8753ES    | S-Parameter Network Analyzer                    | 2/8/2018   | Annual       | 2/8/2019   | US39170122    |
| Agilent            | E4432B    | ESG-D Series Signal Generator                   | 4/19/2018  | Annual       | 4/19/2019  | US40053896    |
| Agilent            | E4438C    | ESG Vector Signal Generator                     | 3/24/2017  | Biennial     | 3/24/2019  | MY42082385    |
| Agilent            | E4438C    | ESG Vector Signal Generator                     | 3/23/2017  | Biennial     | 3/23/2019  | MY42082659    |
| Agilent            | E5515C    | 8960 Series 10 Wireless Communications Test Set | 11/15/2017 | Annual       | 11/15/2018 | GB42230325    |
| Agilent            | E5515C    | Wireless Communications Test Set                | 5/22/2018  | Biennial     | 5/22/2020  | GB43193563    |
| Agilent            | E5515C    | Wireless Communications Test Set                | 2/7/2018   | Triennial    | 2/7/2021   | GB43304447    |
| Agilent            | N4010A    | Wireless Connectivity Test Set                  | N/A        | N/A          | N/A        | GB44450273    |
| Agilent            | N5182A    | MXG Vector Signal Generator                     | 11/1/2017  | Annual       | 11/1/2018  | MY47420603    |
| Agilent            | N9202A    | MXA Signal Analyzer                             | 1/24/2018  | Annual       | 1/24/2019  | US46470561    |
| Amplifier Research | 1551G6    | Amplifier                                       | CBT        | N/A          | CBT        | 433971        |
| Amplifier Research | 1551G6    | Amplifier                                       | CBT        | N/A          | CBT        | 433972        |
| Anritsu            | MA24106A  | USB Power Sensor                                | 6/5/2018   | Annual       | 6/5/2019   | 1231535       |
| Anritsu            | MA24106A  | USB Power Sensor                                | 6/5/2018   | Annual       | 6/5/2019   | 1231538       |
| Anritsu            | MA2411B   | Pulse Power Sensor                              | 3/2/2018   | Annual       | 3/2/2019   | 1207364       |
| Anritsu            | MA2411B   | Pulse Power Sensor                              | 3/2/2018   | Annual       | 3/2/2019   | 1339018       |
| Anritsu            | ML2495A   | Power Meter                                     | 10/22/2017 | Annual       | 10/22/2018 | 941001        |
| Anritsu            | ML2495A   | Power Meter                                     | 11/28/2017 | Annual       | 11/28/2018 | 1039008       |
| Anritsu            | MT8820C   | Radio Communication Analyzer                    | 1/5/2018   | Annual       | 1/5/2019   | 6201144418    |
| Anritsu            | MT8820C   | Radio Communication Analyzer                    | 3/20/2018  | Annual       | 3/20/2019  | 6201144419    |
| COMTech            | AR85729-S | Solid State Amplifier                           | CBT        | N/A          | CBT        | MISSA00-009   |
| Control Company    | 4040      | Therm./ Clock/ Humidity Monitor                 | 1/8/2018   | Annual       | 1/8/2019   | 160473909     |
| Control Company    | 4352      | Ultra Long Stem Thermometer                     | 1/8/2018   | Annual       | 1/8/2019   | 160508097     |
| Intelligent Weigh  | PD-3000   | Electronic Balance                              | CBT        | N/A          | CBT        | 11081534      |
| Keysight           | 772D      | Dual Directional Coupler                        | CBT        | N/A          | CBT        | MY52180215    |
| MCL                | BW-N6W5+  | 6dB Attenuator                                  | CBT        | N/A          | CBT        | 1139          |
| Mini Circuits      | PWR-4GHS  | USB Power Sensor                                | 1/22/2018  | Annual       | 1/22/2019  | 11710030062   |
| Mini Circuits      | PWR-4GHS  | USB Power Sensor                                | 1/20/2018  | Annual       | 1/20/2019  | 11710030063   |
| MiniCircuits       | SLP-2400+ | Low Pass Filter                                 | CBT        | N/A          | CBT        | R8979500903   |
| MiniCircuits       | VLF-6000+ | Low Pass Filter                                 | CBT        | N/A          | CBT        | N/A           |
| Mini-Circuits      | BW-N20W5  | Power Attenuator                                | CBT        | N/A          | CBT        | 1226          |
| Mini-Circuits      | BW-N20W5+ | DC to 18 GHz Precision Fixed 20 dB Attenuator   | CBT        | N/A          | CBT        | N/A           |
| Mini-Circuits      | NLP-1200+ | Low Pass Filter DC to 1000 MHz                  | CBT        | N/A          | CBT        | N/A           |
| Mini-Circuits      | NLP-2950+ | Low Pass Filter DC to 2700 MHz                  | CBT        | N/A          | CBT        | N/A           |
| Mitutoyo           | CD-6°CSX  | Digital Caliper                                 | 4/18/2018  | Biennial     | 4/18/2020  | 13264165      |
| Narda              | 4014C-6   | 4 - 8 GHz SMA 6 dB Directional Coupler          | CBT        | N/A          | CBT        | N/A           |
| Narda              | 4772-3    | Attenuator (3dB)                                | CBT        | N/A          | CBT        | 9406          |
| Pasternack         | NC-100    | Torque Wrench                                   | 4/18/2018  | Annual       | 4/18/2019  | 1445          |
| Pasternack         | PE2208-6  | Bidirectional Coupler                           | CBT        | N/A          | CBT        | N/A           |
| Pasternack         | PE2209-10 | Bidirectional Coupler                           | CBT        | N/A          | CBT        | N/A           |
| Pasternack         | PE5011-1  | Torque Wrench                                   | 7/19/2017  | Biennial     | 7/19/2019  | N/A           |
| Rohde & Schwarz    | CMW500    | Radio Communication Tester                      | 11/3/2017  | Annual       | 11/3/2018  | 100976        |
| Rohde & Schwarz    | CMW500    | Radio Communication Tester                      | 5/21/2018  | Annual       | 5/21/2019  | 101699        |
| Rohde & Schwarz    | CMW500    | Radio Communication Tester                      | 10/13/2017 | Annual       | 10/13/2018 | 102060        |
| Rohde & Schwarz    | CMW500    | Wideband Radio Communication Tester             | 7/20/2017  | Annual       | 7/20/2018  | 132885        |
| Rohde & Schwarz    | CMW500    | Radio Communication tester                      | 7/14/2017  | Annual       | 7/14/2018  | 140144        |
| Rohde & Schwarz    | CMW500    | Wideband Radio Communication Tester             | 1/19/2018  | Annual       | 1/19/2019  | 164948        |
| Seekonk            | NC-100    | Torque Wrench (8" lb)                           | 5/10/2018  | Biennial     | 5/10/2020  | 21053         |
| SPEAG              | D750V3    | 750 MHz SAR Dipole                              | 1/15/2018  | Annual       | 1/15/2019  | 1003          |
| SPEAG              | D835V2    | 835 MHz SAR Dipole                              | 1/15/2018  | Annual       | 1/15/2019  | 4d132         |
| SPEAG              | D1750V2   | 1750 MHz SAR Dipole                             | 7/14/2016  | Biennial     | 7/14/2018  | 1150          |
| SPEAG              | D1900V2   | 1900 MHz SAR Dipole                             | 2/7/2018   | Annual       | 2/7/2019   | 5d148         |
| SPEAG              | D2450V2   | 2450 MHz SAR Dipole                             | 2/7/2018   | Annual       | 2/7/2019   | 882           |
| SPEAG              | D2450V2   | 2450 MHz SAR Dipole                             | 7/25/2016  | Biennial     | 7/25/2018  | 981           |
| SPEAG              | D2600V2   | 2600 MHz SAR Dipole                             | 4/11/2018  | Annual       | 4/11/2019  | 1004          |
| SPEAG              | D2600V2   | 2600 MHz SAR Dipole                             | 9/13/2016  | Biennial     | 9/13/2018  | 1071          |
| SPEAG              | D5GHzV2   | 5 GHz SAR Dipole                                | 8/15/2017  | Annual       | 8/15/2018  | 1237          |
| SPEAG              | DAE4      | Dasy Data Acquisition Electronics               | 2/15/2018  | Annual       | 2/15/2019  | 665           |
| SPEAG              | DAE4      | Dasy Data Acquisition Electronics               | 5/22/2018  | Annual       | 5/22/2019  | 859           |
| SPEAG              | DAE4      | Dasy Data Acquisition Electronics               | 7/13/2017  | Annual       | 7/13/2018  | 1322          |
| SPEAG              | DAE4      | Dasy Data Acquisition Electronics               | 8/9/2017   | Annual       | 8/9/2018   | 1323          |
| SPEAG              | DAE4      | Dasy Data Acquisition Electronics               | 6/21/2017  | Annual       | 6/21/2018  | 1333          |
| SPEAG              | DAE4      | Dasy Data Acquisition Electronics               | 3/7/2018   | Annual       | 3/7/2019   | 1368          |
| SPEAG              | DAE4      | Dasy Data Acquisition Electronics               | 4/11/2018  | Annual       | 4/11/2019  | 1407          |
| SPEAG              | DAE4      | Dasy Data Acquisition Electronics               | 11/9/2017  | Annual       | 11/9/2018  | 1450          |
| SPEAG              | DAK-3.5   | Dielectric Assessment Kit                       | 9/12/2017  | Annual       | 9/12/2018  | 1091          |
| SPEAG              | ES30V3    | SAR Probe                                       | 9/18/2017  | Annual       | 9/18/2018  | 3287          |
| SPEAG              | ES30V3    | SAR Probe                                       | 3/13/2018  | Annual       | 3/13/2019  | 3319          |
| SPEAG              | ES30V3    | SAR Probe                                       | 8/14/2017  | Annual       | 8/14/2018  | 3332          |
| SPEAG              | ES30V3    | SAR Probe                                       | 3/27/2018  | Annual       | 3/27/2019  | 3347          |
| SPEAG              | EX30V4    | SAR Probe                                       | 2/14/2018  | Annual       | 2/14/2019  | 3914          |
| SPEAG              | EX30V4    | SAR Probe                                       | 4/18/2018  | Annual       | 4/18/2019  | 7357          |
| SPEAG              | EX30V4    | SAR Probe                                       | 5/22/2018  | Annual       | 5/22/2019  | 7406          |
| SPEAG              | EX30V4    | SAR Probe                                       | 7/17/2017  | Annual       | 7/17/2018  | 7410          |

Note:

1. CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.
2. Each equipment was used solely within its calibration period.

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | SAR EVALUATION REPORT        |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 96 of 100                  |

# 15 MEASUREMENT UNCERTAINTIES

| a                                                                             | c             | d              | e=<br>f(d,k) | f                     | g                        | h =<br>c x f/e                 | i =<br>c x g/e                   | k              |
|-------------------------------------------------------------------------------|---------------|----------------|--------------|-----------------------|--------------------------|--------------------------------|----------------------------------|----------------|
| Uncertainty Component                                                         | Tol.<br>(± %) | Prob.<br>Dist. | Div.         | c <sub>i</sub><br>1gm | c <sub>i</sub><br>10 gms | 1gm<br>u <sub>i</sub><br>(± %) | 10gms<br>u <sub>i</sub><br>(± %) | v <sub>i</sub> |
| <b>Measurement System</b>                                                     |               |                |              |                       |                          |                                |                                  |                |
| Probe Calibration                                                             | 6.55          | N              | 1            | 1.0                   | 1.0                      | 6.6                            | 6.6                              | ∞              |
| Axial Isotropy                                                                | 0.25          | N              | 1            | 0.7                   | 0.7                      | 0.2                            | 0.2                              | ∞              |
| Hemishperical Isotropy                                                        | 1.3           | N              | 1            | 0.7                   | 0.7                      | 0.9                            | 0.9                              | ∞              |
| Boundary Effect                                                               | 2.0           | R              | 1.73         | 1.0                   | 1.0                      | 1.2                            | 1.2                              | ∞              |
| Linearity                                                                     | 0.3           | N              | 1            | 1.0                   | 1.0                      | 0.3                            | 0.3                              | ∞              |
| System Detection Limits                                                       | 0.25          | R              | 1.73         | 1.0                   | 1.0                      | 0.1                            | 0.1                              | ∞              |
| Readout Electronics                                                           | 0.3           | N              | 1            | 1.0                   | 1.0                      | 0.3                            | 0.3                              | ∞              |
| Response Time                                                                 | 0.8           | R              | 1.73         | 1.0                   | 1.0                      | 0.5                            | 0.5                              | ∞              |
| Integration Time                                                              | 2.6           | R              | 1.73         | 1.0                   | 1.0                      | 1.5                            | 1.5                              | ∞              |
| RF Ambient Conditions - Noise                                                 | 3.0           | R              | 1.73         | 1.0                   | 1.0                      | 1.7                            | 1.7                              | ∞              |
| RF Ambient Conditions - Reflections                                           | 3.0           | R              | 1.73         | 1.0                   | 1.0                      | 1.7                            | 1.7                              | ∞              |
| Probe Positioner Mechanical Tolerance                                         | 0.4           | R              | 1.73         | 1.0                   | 1.0                      | 0.2                            | 0.2                              | ∞              |
| Probe Positioning w/ respect to Phantom                                       | 6.7           | R              | 1.73         | 1.0                   | 1.0                      | 3.9                            | 3.9                              | ∞              |
| Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation | 4.0           | R              | 1.73         | 1.0                   | 1.0                      | 2.3                            | 2.3                              | ∞              |
| <b>Test Sample Related</b>                                                    |               |                |              |                       |                          |                                |                                  |                |
| Test Sample Positioning                                                       | 2.7           | N              | 1            | 1.0                   | 1.0                      | 2.7                            | 2.7                              | 35             |
| Device Holder Uncertainty                                                     | 1.67          | N              | 1            | 1.0                   | 1.0                      | 1.7                            | 1.7                              | 5              |
| Output Power Variation - SAR drift measurement                                | 5.0           | R              | 1.73         | 1.0                   | 1.0                      | 2.9                            | 2.9                              | ∞              |
| SAR Scaling                                                                   | 0.0           | R              | 1.73         | 1.0                   | 1.0                      | 0.0                            | 0.0                              | ∞              |
| <b>Phantom &amp; Tissue Parameters</b>                                        |               |                |              |                       |                          |                                |                                  |                |
| Phantom Uncertainty (Shape & Thickness tolerances)                            | 7.6           | R              | 1.73         | 1.0                   | 1.0                      | 4.4                            | 4.4                              | ∞              |
| Liquid Conductivity - measurement uncertainty                                 | 4.2           | N              | 1            | 0.78                  | 0.71                     | 3.3                            | 3.0                              | 10             |
| Liquid Permittivity - measurement uncertainty                                 | 4.1           | N              | 1            | 0.23                  | 0.26                     | 1.0                            | 1.1                              | 10             |
| Liquid Conductivity - Temperature Uncertainty                                 | 3.4           | R              | 1.73         | 0.78                  | 0.71                     | 1.5                            | 1.4                              | ∞              |
| Liquid Permittivity - Temperature Uncertainty                                 | 0.6           | R              | 1.73         | 0.23                  | 0.26                     | 0.1                            | 0.1                              | ∞              |
| Liquid Conductivity - deviation from target values                            | 5.0           | R              | 1.73         | 0.64                  | 0.43                     | 1.8                            | 1.2                              | ∞              |
| Liquid Permittivity - deviation from target values                            | 5.0           | R              | 1.73         | 0.60                  | 0.49                     | 1.7                            | 1.4                              | ∞              |
| <b>Combined Standard Uncertainty (k=1)</b>                                    |               |                |              |                       |                          | RSS                            | 11.5                             | 11.3           |
| <b>Expanded Uncertainty</b><br>(95% CONFIDENCE LEVEL)                         |               |                |              |                       |                          | k=2                            | 23.0                             | 22.6           |

|                                      |                                                                                     |                              |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT837P                   |  | SAR EVALUATION REPORT        |  | Approved by:<br>Quality Manager |
| Document S/N:<br>1M1806060119-01.A3L | Test Dates:<br>06/11/18 - 06/26/18                                                  | DUT Type:<br>Portable Tablet |                                                                                       | Page 97 of 100                  |

## 16 CONCLUSION

### 16.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

|                                             |                                                                                                                                                                                                        |                                        |
|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> A3LSMT837P                   |  <b>SAR EVALUATION REPORT</b>  | <b>Approved by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>1M1806060119-01.A3L | <b>Test Dates:</b><br>06/11/18 - 06/26/18                                                                                                                                                              | <b>DUT Type:</b><br>Portable Tablet    |
|                                             |                                                                                                                                                                                                        | Page 98 of 100                         |

## 17 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

|                                             |                                                                                     |                                     |                                                                                       |                                        |
|---------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> A3LSMT837P                   |  | <b>SAR EVALUATION REPORT</b>        |  | <b>Approved by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>1M1806060119-01.A3L | <b>Test Dates:</b><br>06/11/18 - 06/26/18                                           | <b>DUT Type:</b><br>Portable Tablet |                                                                                       | Page 99 of 100                         |

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz), July 2016.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Body and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

|                                             |                                                                                                                                                                                                        |                                     |                                        |
|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|----------------------------------------|
| <b>FCC ID:</b> A3LSMT837P                   |  <b>SAR EVALUATION REPORT</b>  |                                     | <b>Approved by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>1M1806060119-01.A3L | <b>Test Dates:</b><br>06/11/18 - 06/26/18                                                                                                                                                              | <b>DUT Type:</b><br>Portable Tablet | Page 100 of 100                        |

## APPENDIX A: SAR TEST DATA

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMT837P; Type: Portable Tablet; Serial: 42109**

Communication System: UID 0, CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 820.1 \text{ MHz}$ ;  $\sigma = 0.978 \text{ S/m}$ ;  $\epsilon_r = 54.328$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.6 cm

Test Date: 06-18-2018; Ambient Temp: 21.5°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3914; ConvF(9.57, 9.57, 9.57); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: Cell. BC10 EVDO, Rule Part 90S, Body SAR, Top Edge, Mid.ch**


**Area Scan (10x14x1):** Measurement grid:  $dx=5\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 35.47 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.71 W/kg

**SAR(1 g) = 1.15 W/kg**

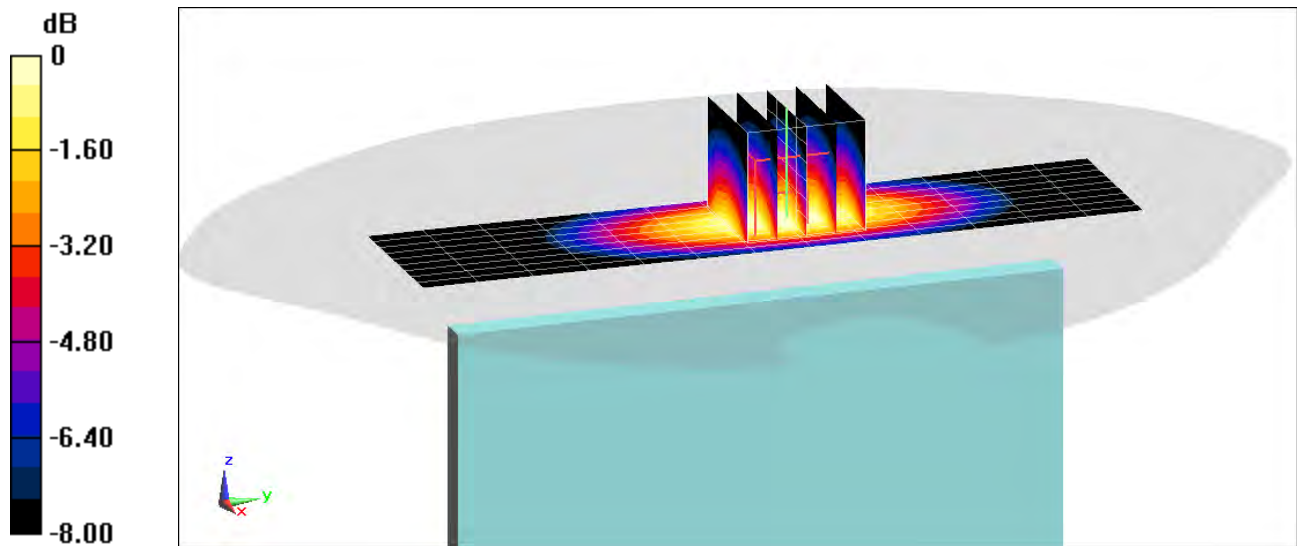

0 dB = 1.52 W/kg = 1.82 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMT837P; Type: Portable Tablet; Serial: 42109**

Communication System: UID 0, CDMA; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 824.7 \text{ MHz}$ ;  $\sigma = 0.98 \text{ S/m}$ ;  $\epsilon_r = 54.322$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.6 cm

Test Date: 06-18-2018; Ambient Temp: 21.5°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3914; ConvF(9.57, 9.57, 9.57); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: Cell. EVDO, Rule Part 22H, Body SAR, Top Edge, Low.ch**


**Area Scan (10x14x1):** Measurement grid:  $dx=5\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 35.64 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.73 W/kg

**SAR(1 g) = 1.17 W/kg**

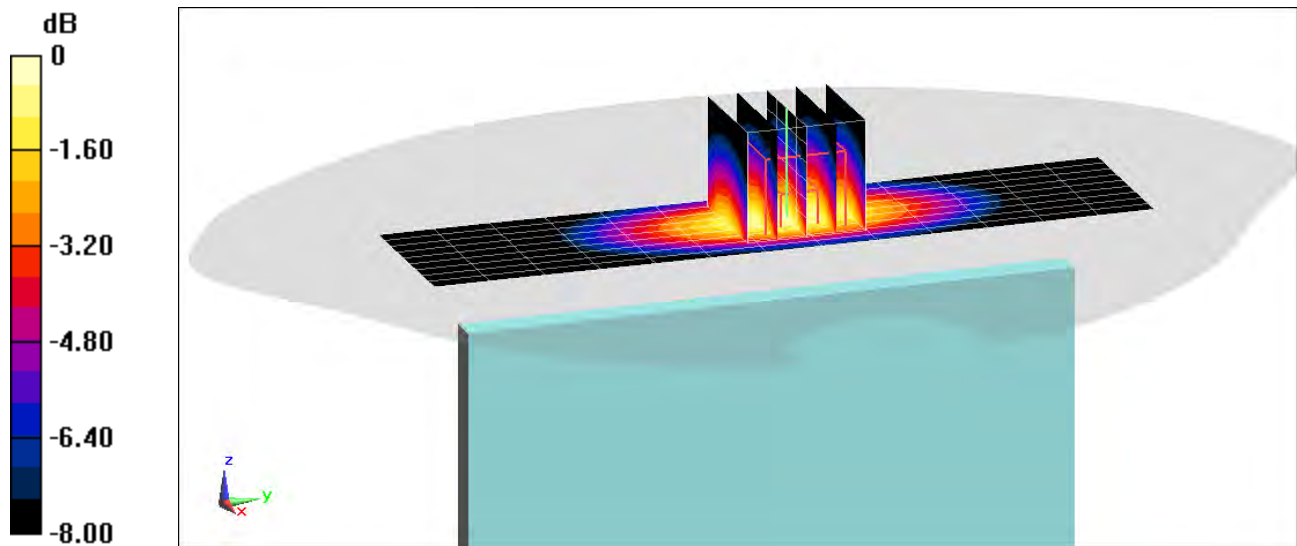

0 dB = 1.54 W/kg = 1.88 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMT837P; Type: Portable Tablet; Serial: 42125**

Communication System: UID 0, CDMA; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1908.75 \text{ MHz}$ ;  $\sigma = 1.571 \text{ S/m}$ ;  $\epsilon_r = 52.232$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-11-2018; Ambient Temp: 21.3°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3287; ConvF(5, 5, 5); Calibrated: 9/18/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 6/21/2017

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1167

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: PCS EVDO, Body SAR, Back Side, High.ch**


**Area Scan (15x11x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.31 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.09 W/kg

**SAR(1 g) = 0.918 W/kg**

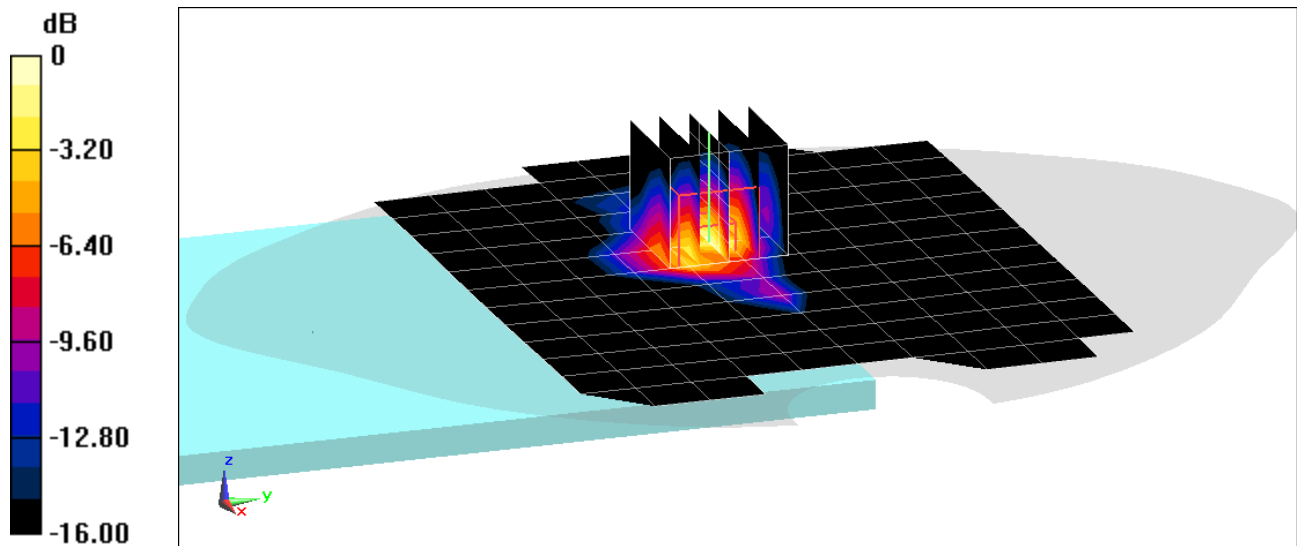

0 dB = 1.34 W/kg = 1.27 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMT837P; Type: Portable Tablet; Serial: 42299**

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$ ;  $\sigma = 0.942 \text{ S/m}$ ;  $\epsilon_r = 53.34$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.6 cm

Test Date: 06-13-2018; Ambient Temp: 21.0°C; Tissue Temp: 21.1°C

Probe: ES3DV3 - SN3347; ConvF(6.59, 6.59, 6.59); Calibrated: 3/27/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 11/9/2017

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 12, Body SAR, Top Edge, Mid.ch, 10 MHz Bandwidth,  
QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x15x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.95 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.756 W/kg

**SAR(1 g) = 0.522 W/kg**

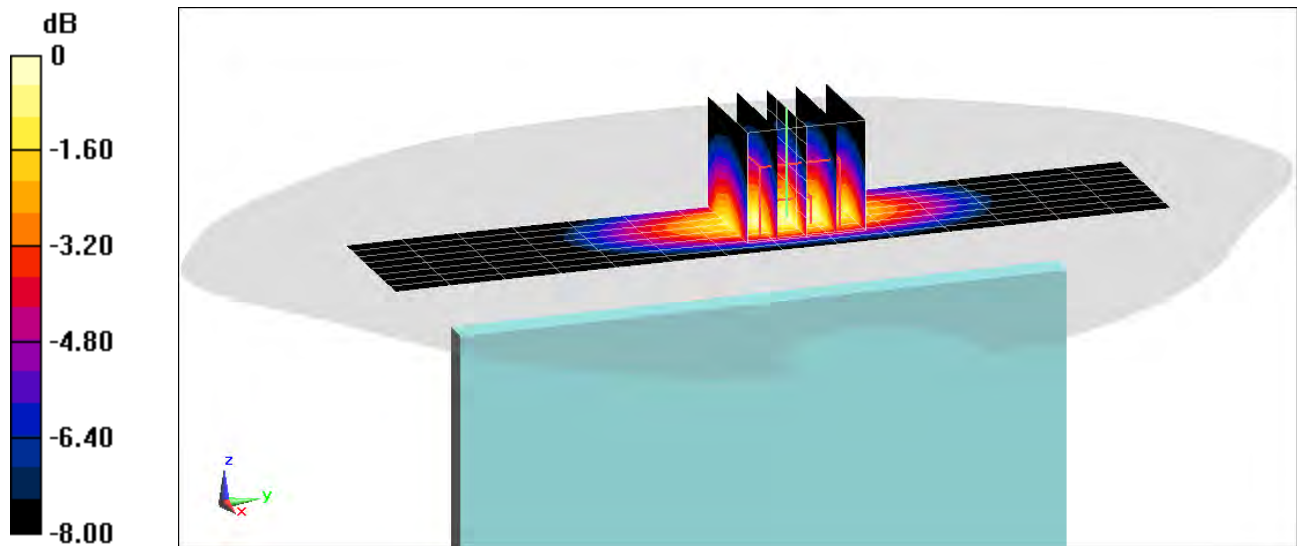

0 dB = 0.611 W/kg = -2.14 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMT837P; Type: Portable Tablet; Serial: 42299**

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 782 \text{ MHz}$ ;  $\sigma = 0.971 \text{ S/m}$ ;  $\epsilon_r = 53.146$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.6 cm

Test Date: 06-13-2018; Ambient Temp: 21.0°C; Tissue Temp: 21.1°C

Probe: ES3DV3 - SN3347; ConvF(6.59, 6.59, 6.59); Calibrated: 3/27/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 11/9/2017

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 13, Body SAR, Top Edge, Mid.ch, 10 MHz Bandwidth,  
QPSK, 1 RB, 0 RB Offset**


**Area Scan (10x15x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.92 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.28 W/kg

**SAR(1 g) = 0.905 W/kg**

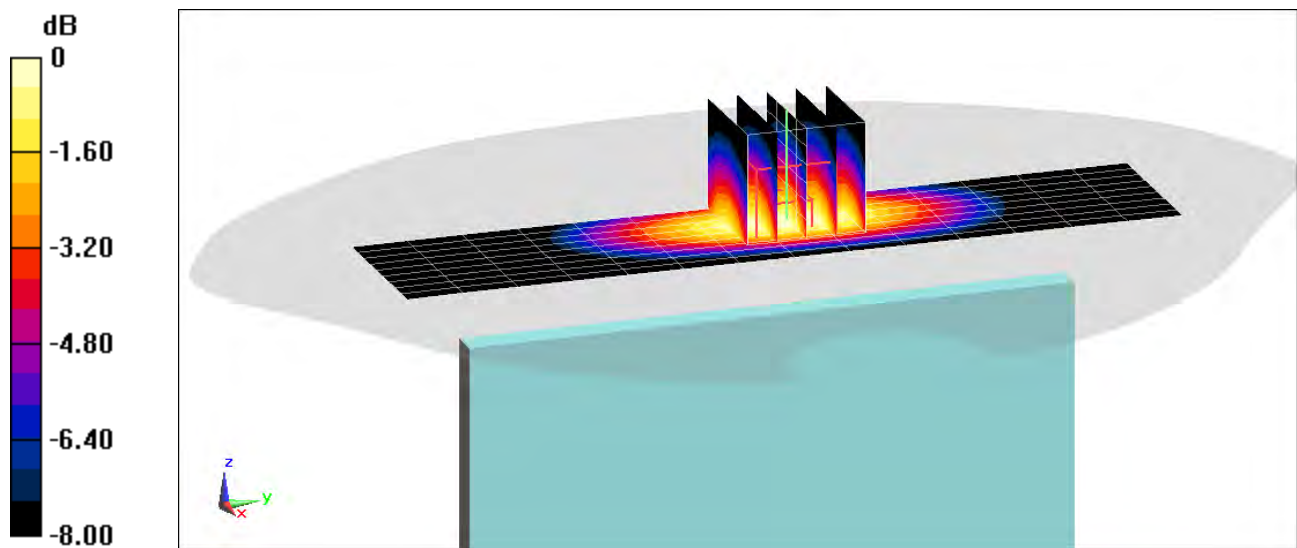

0 dB = 1.02 W/kg = 0.09 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMT837P; Type: Portable Tablet; Serial: 42299**

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 831.5 \text{ MHz}$ ;  $\sigma = 0.985 \text{ S/m}$ ;  $\epsilon_r = 53.122$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.6 cm

Test Date: 06-14-2018; Ambient Temp: 20.7°C; Tissue Temp: 20.2°C

Probe: ES3DV3 - SN3347; ConvF(6.37, 6.37, 6.37); Calibrated: 3/27/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 11/9/2017

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 26 (Cell.), Body SAR, Top Edge, Mid.ch, 15 MHz Bandwidth,  
QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x14x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.79 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.65 W/kg

**SAR(1 g) = 1.14 W/kg**

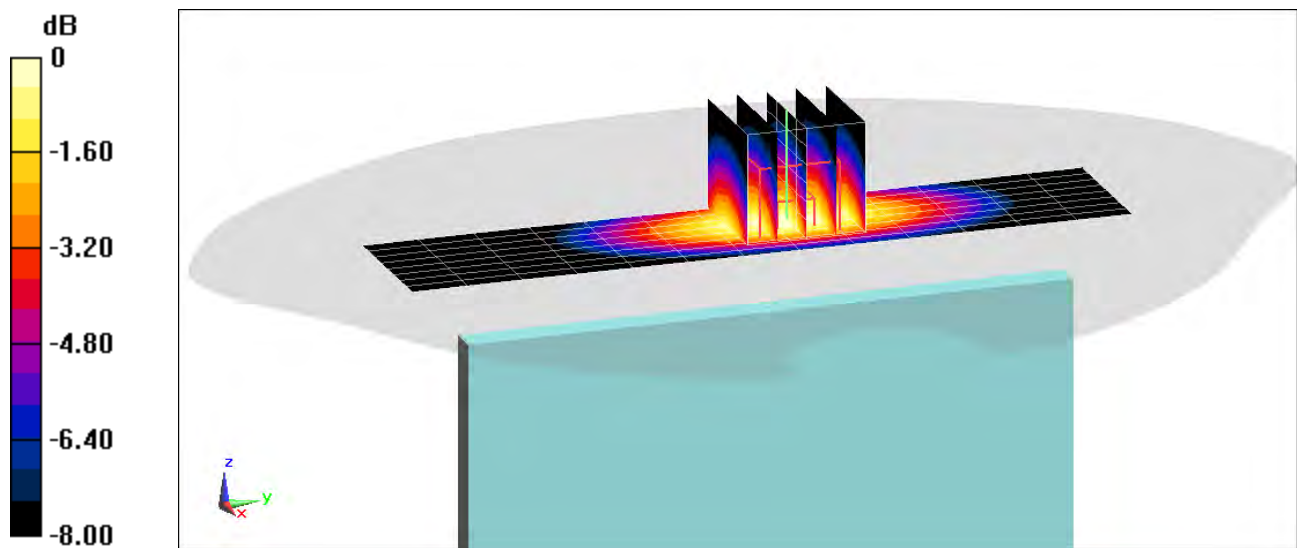

0 dB = 1.33 W/kg = 1.24 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMT837P; Type: Portable Tablet; Serial: 42299**

Communication System: UID 0, LTE Band 5 (Cell.); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.5 \text{ MHz}$ ;  $\sigma = 0.987 \text{ S/m}$ ;  $\epsilon_r = 53.111$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.6 cm

Test Date: 06-14-2018; Ambient Temp: 20.7°C; Tissue Temp: 20.2°C

Probe: ES3DV3 - SN3347; ConvF(6.37, 6.37, 6.37); Calibrated: 3/27/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 11/9/2017

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 5 (Cell.), Body SAR, Top Edge, Mid.ch, 10 MHz Bandwidth,  
QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x15x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.05 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.60 W/kg

**SAR(1 g) = 1.1 W/kg**

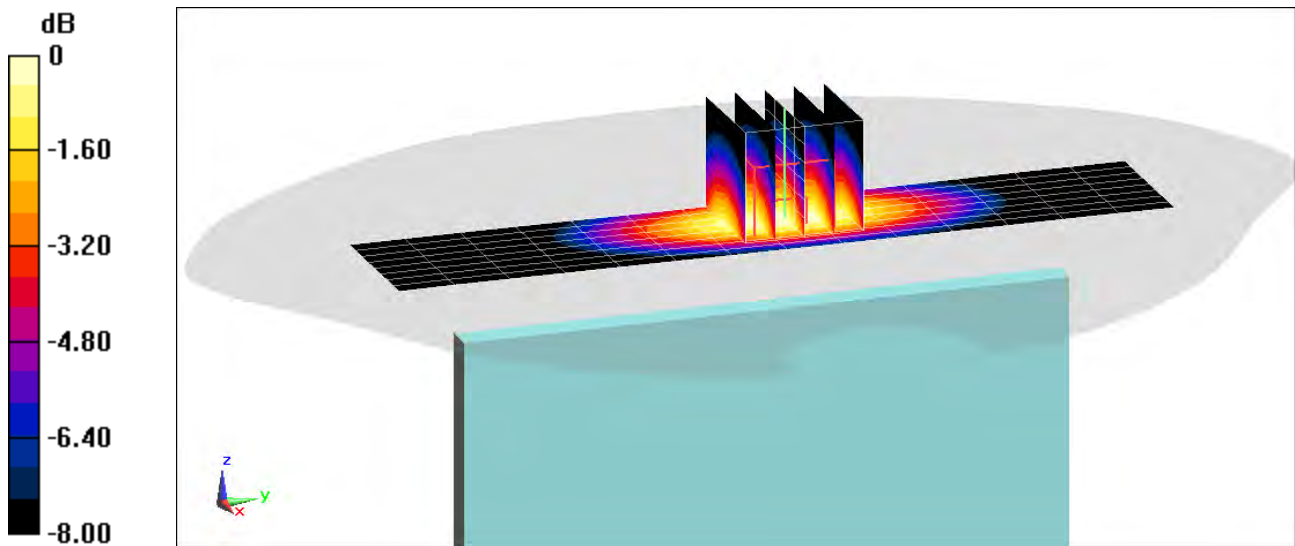

0 dB = 1.28 W/kg = 1.07 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMT837P; Type: Portable Tablet; Serial: 42299**

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used (interpolated):

$f = 1732.5 \text{ MHz}$ ;  $\sigma = 1.464 \text{ S/m}$ ;  $\epsilon_r = 53.098$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-19-2018; Ambient Temp: 22.6°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3332; ConvF(5.16, 5.16, 5.16); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 4 (AWS), Body SAR, Right Edge, Mid.ch, 20 MHz Bandwidth,  
QPSK, 1 RB, 0 RB Offset**


**Area Scan (10x19x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.33 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 2.35 W/kg

**SAR(1 g) = 1.1 W/kg**

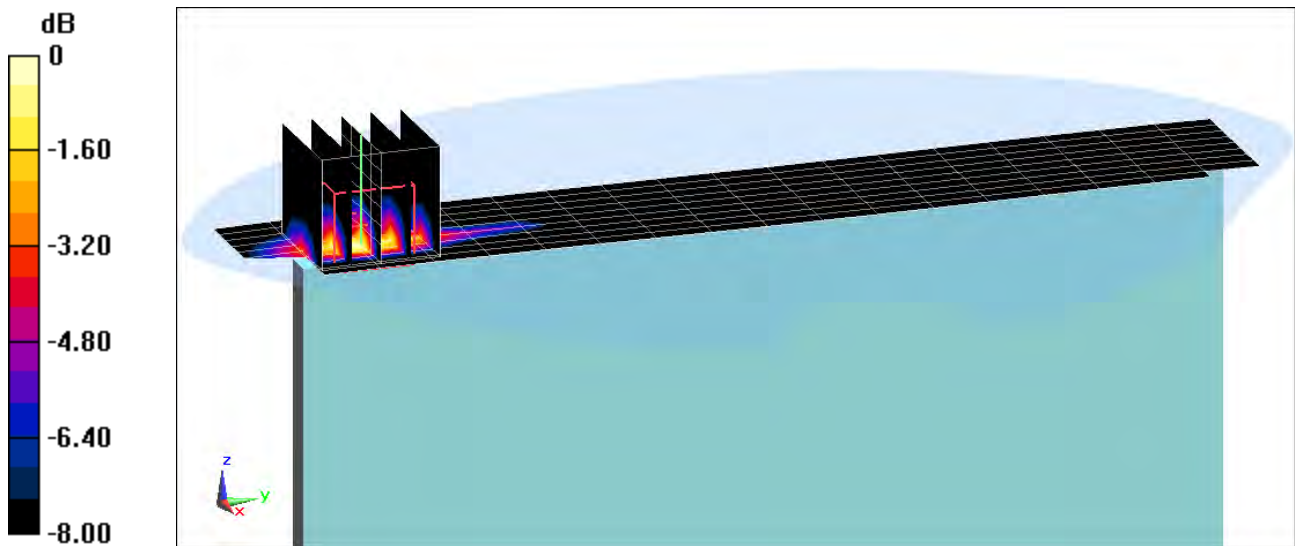

0 dB = 1.54 W/kg = 1.88 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMT837P; Type: Portable Tablet; Serial: 42158**

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1905 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1905 \text{ MHz}$ ;  $\sigma = 1.581 \text{ S/m}$ ;  $\epsilon_r = 51.564$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-18-2018; Ambient Temp: 21.6°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7406; ConvF(7.74, 7.74, 7.74); Calibrated: 5/22/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/22/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 25 (PCS), Body SAR, Back Side, High.ch, 20 MHz Bandwidth,  
QPSK, 50 RB, 0 RB Offset**


**Area Scan (15x10x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.37 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 2.28 W/kg

**SAR(1 g) = 1.01 W/kg**

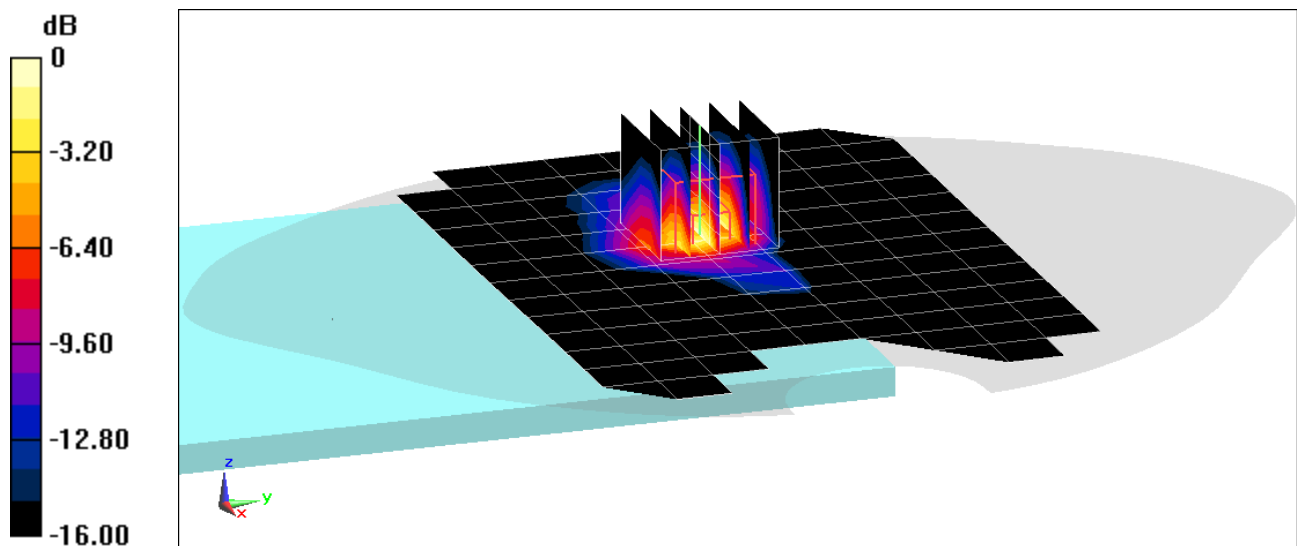

0 dB = 1.48 W/kg = 1.70 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMT837P; Type: Portable Tablet; Serial: 42133**

Communication System: UID 0, LTE Band 7; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used (interpolated):

$f = 2535 \text{ MHz}$ ;  $\sigma = 2.088 \text{ S/m}$ ;  $\epsilon_r = 50.807$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-18-2018; Ambient Temp: 21.5°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7410; ConvF(7.43, 7.43, 7.43); Calibrated: 7/17/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 7, Body SAR, Back Side, Mid.ch, 20 MHz Bandwidth,  
QPSK, 1 RB, 0 RB Offset**


**Area Scan (19x14x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 73.31 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 2.17 W/kg

**SAR(1 g) = 0.767 W/kg**

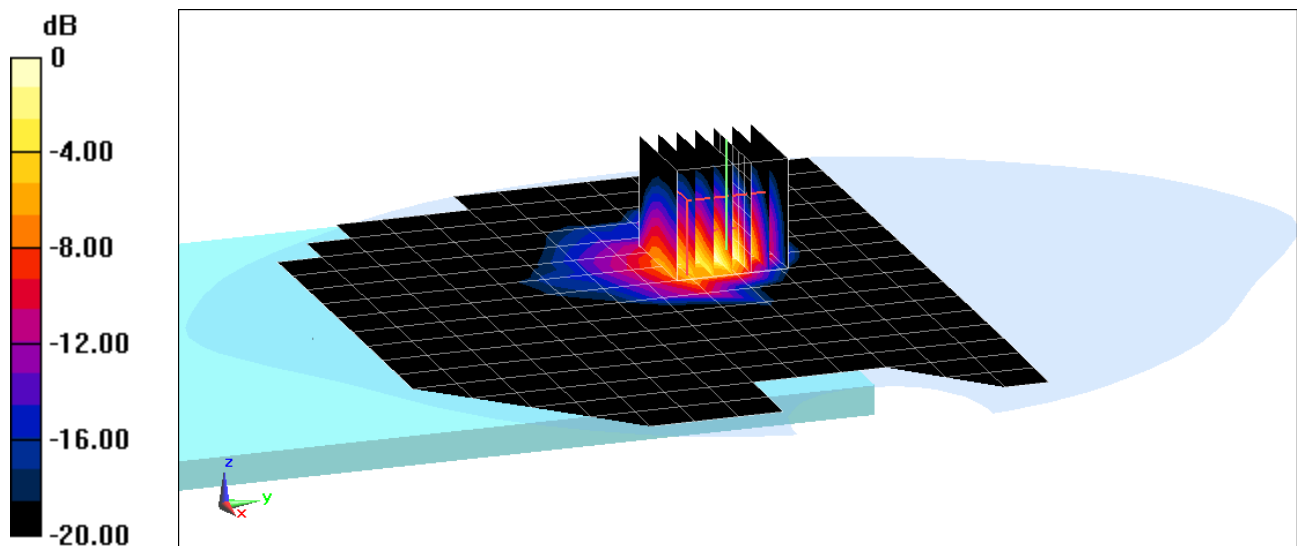

0 dB = 1.39 W/kg = 1.43 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMT837P; Type: Portable Tablet; Serial: 13589**

Communication System: UID 0, LTE Band 41 (Class 3); Frequency: 2680 MHz; Duty Cycle: 1:1.58

Medium: 2450 Body; Medium parameters used (interpolated):

$f = 2680 \text{ MHz}$ ;  $\sigma = 2.297 \text{ S/m}$ ;  $\epsilon_r = 50.292$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-26-2018; Ambient Temp: 22.8°C; Tissue Temp: 21.3°C

Probe: ES3DV3 - SN3319; ConvF(4.33, 4.33, 4.33); Calibrated: 3/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/7/2018

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1375

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 41 PC3 ULCA, Body SAR, Back Side,**

**PCC: 20 MHz Bandwidth, QPSK, Ch. 41490 50 RB, 0 RB Offset**

**SCC: 20 MHz Bandwidth, QPSK, Ch. 41292, 50 RB, 50 RB Offset**


**Area Scan (13x8x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (7x8x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 19.85 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 2.91 W/kg

**SAR(1 g) = 0.901 W/kg**

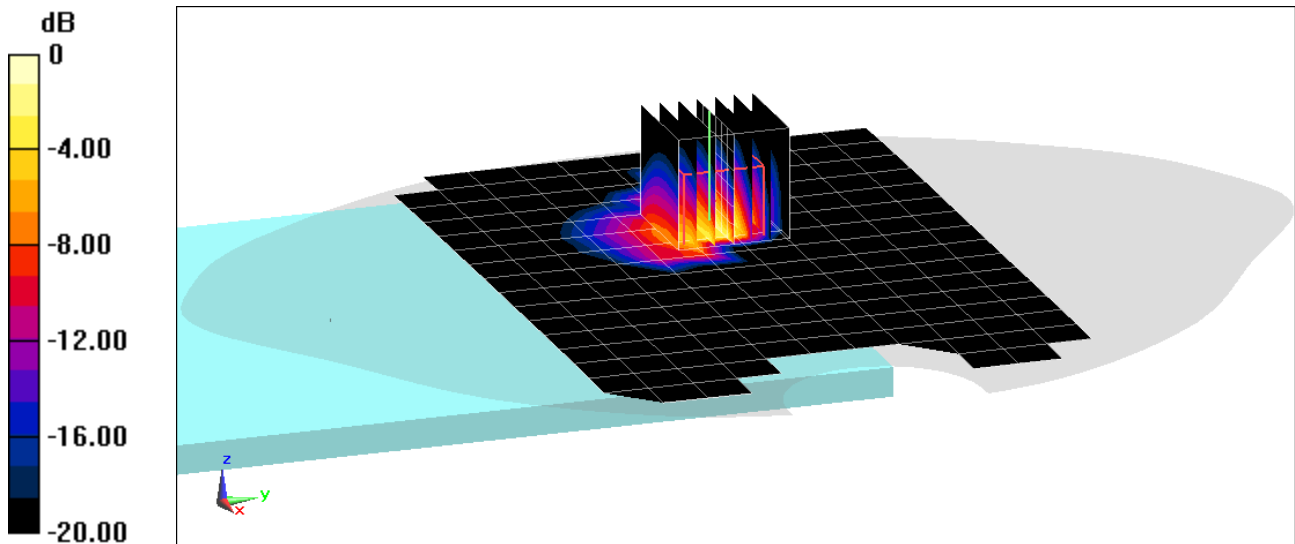

0 dB = 1.37 W/kg = 1.37 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMT837P; Type: Portable Tablet; Serial: 19107**

Communication System: UID 0, \_IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$ ;  $\sigma = 1.964 \text{ S/m}$ ;  $\epsilon_r = 52.464$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-21-2018; Ambient Temp: 21.2°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7410; ConvF(7.69, 7.69, 7.69); Calibrated: 7/17/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11b, Antenna 2, 22 MHz Bandwidth, Body SAR,  
Back Side, Ch 06, 1 Mbps**


**Area Scan (11x21x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.54 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.95 W/kg

**SAR(1 g) = 0.514 W/kg**

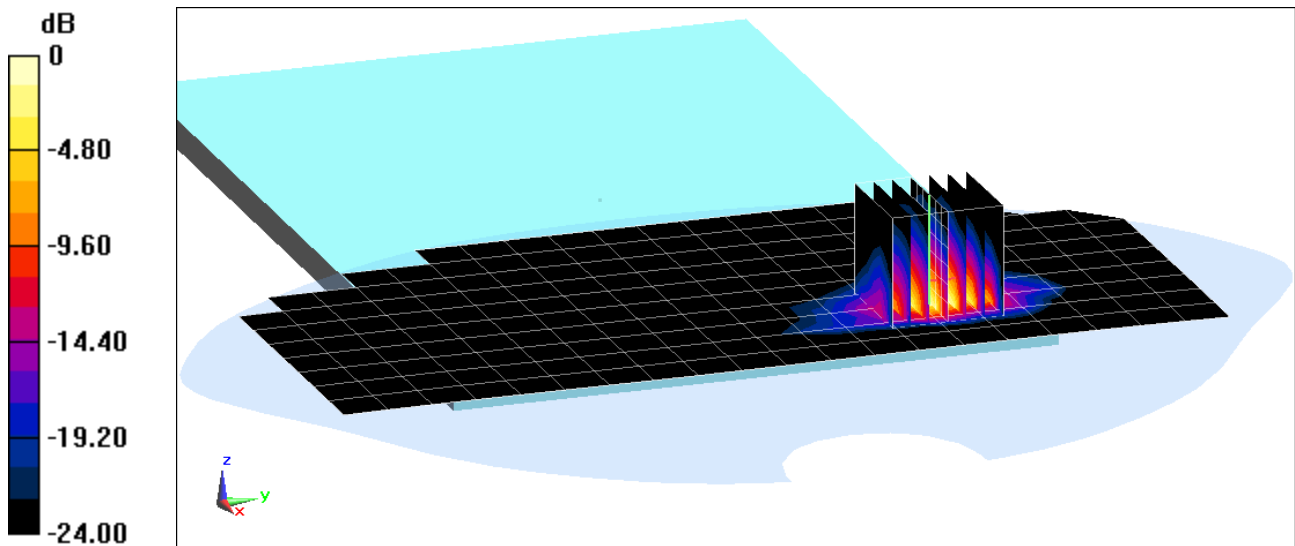

0 dB = 1.20 W/kg = 0.79 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMT837P; Type: Portable Tablet; Serial: 19107**

Communication System: UID 0, 802.11ac 5.2-5.8 GHz Band; Frequency: 5775 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used (interpolated):

$f = 5775 \text{ MHz}$ ;  $\sigma = 6.164 \text{ S/m}$ ;  $\epsilon_r = 46.657$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-18-2018; Ambient Temp: 23.5°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7357; ConvF(4.21, 4.21, 4.21); Calibrated: 4/18/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2018

Phantom: SAM with CRP v5.0 Left; Type: QD000P40CD; Serial: 1687

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11ac, U-NII-3, Antenna 1, 80 MHz Bandwidth, Body SAR,  
Back Side, Ch 155, 29.3 Mbps**


**Area Scan (15x21x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 11.69 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 8.29 W/kg

**SAR(1 g) = 0.866 W/kg**

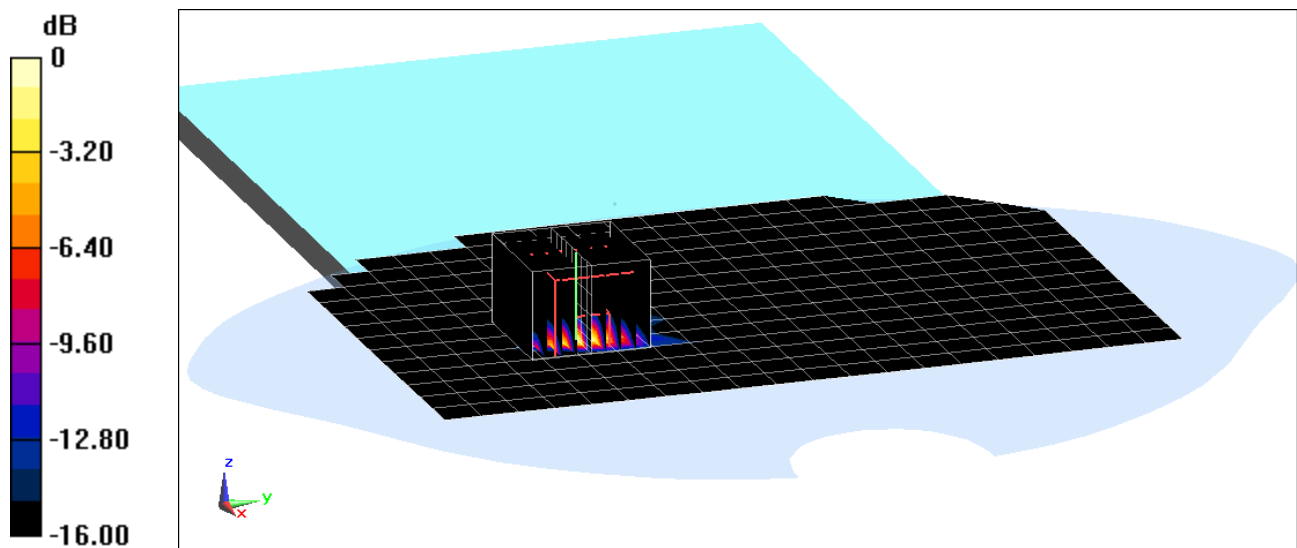

0 dB = 3.05 W/kg = 4.84 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMT837P; Type: Portable Tablet; Serial: 19107**

Communication System: UID 0, Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1.294

Medium: 2450 Body; Medium parameters used (interpolated):

$f = 2480 \text{ MHz}$ ;  $\sigma = 2.022 \text{ S/m}$ ;  $\epsilon_r = 52.305$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-21-2018; Ambient Temp: 21.2°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7410; ConvF(7.69, 7.69, 7.69); Calibrated: 7/17/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: Bluetooth, Body SAR, Ch 78, 1 Mbps, Back Side**


**Area Scan (14x20x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 12.76 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.05 W/kg

**SAR(1 g) = 0.295 W/kg**

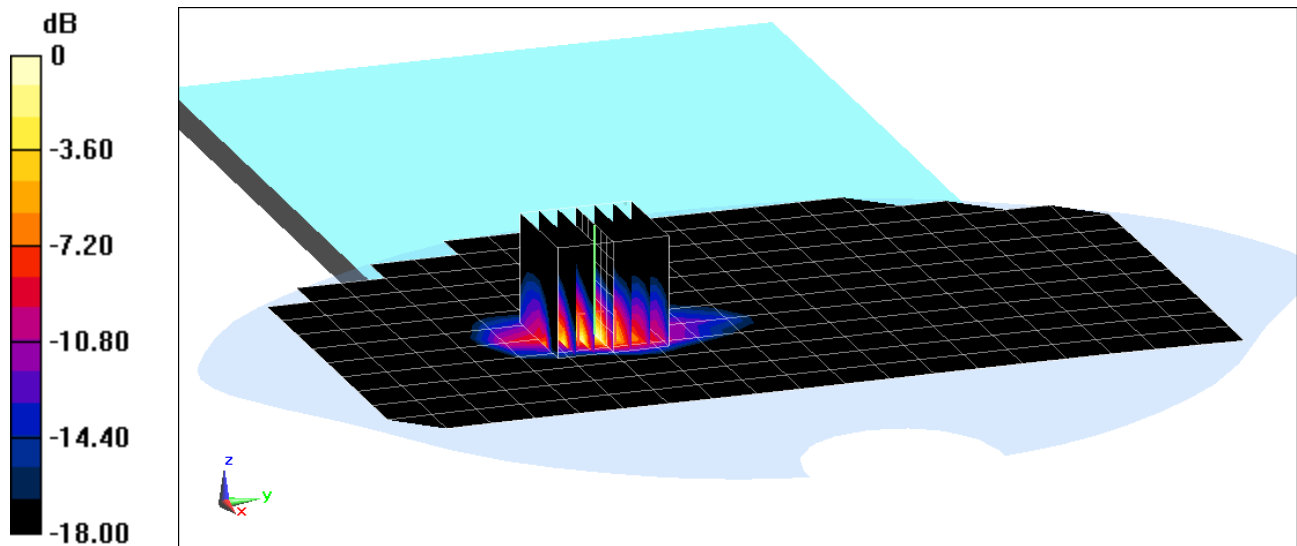

0 dB = 0.683 W/kg = -1.66 dBW/kg

## APPENDIX B: SYSTEM VERIFICATION

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 750 MHz; Type: D750V3; Serial: 1003**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 750 \text{ MHz}$ ;  $\sigma = 0.958 \text{ S/m}$ ;  $\epsilon_r = 53.248$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06-13-2018; Ambient Temp: 21.0°C; Tissue Temp: 21.1°C

Probe: ES3DV3 - SN3347; ConvF(6.59, 6.59, 6.59); Calibrated: 3/27/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 11/9/2017

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 750 MHz System Verification at 23.0 dBm (200 mW)


**Area Scan (7x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.46 W/kg

**SAR(1 g) = 1.68 W/kg**

Deviation(1 g) = -2.10%

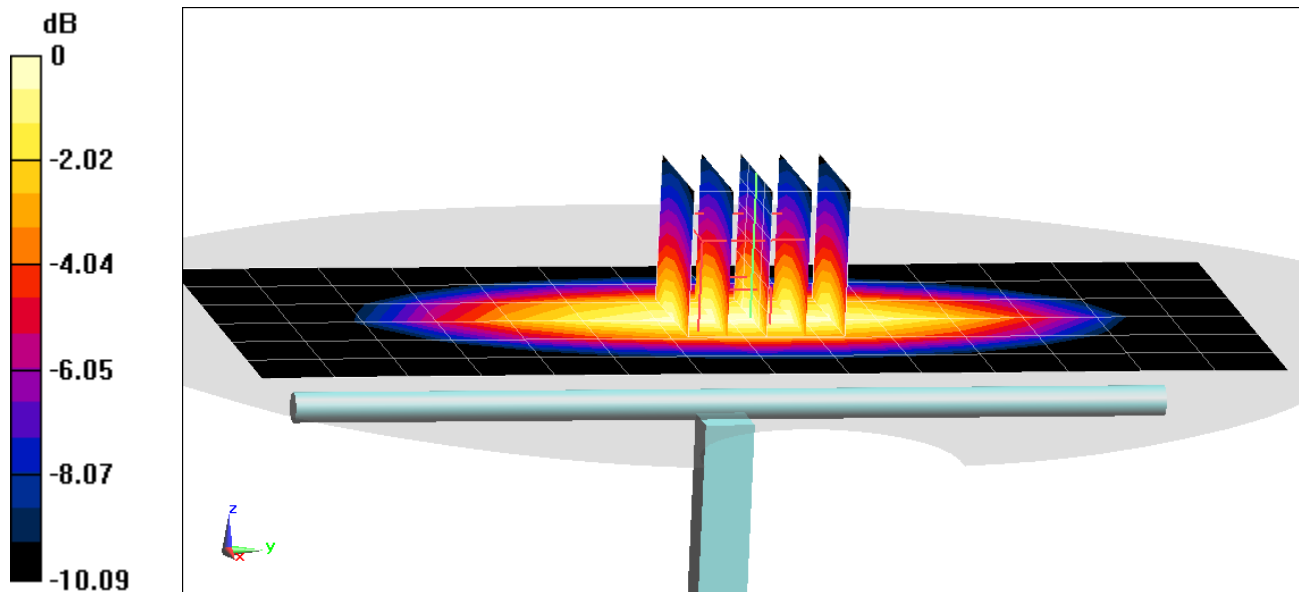

0 dB = 1.96 W/kg = 2.92 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.986 \text{ S/m}$ ;  $\epsilon_r = 53.116$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06-14-2018; Ambient Temp: 20.7°C; Tissue Temp: 20.2°C

Probe: ES3DV3 - SN3347; ConvF(6.37, 6.37, 6.37); Calibrated: 3/27/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1450; Calibrated: 11/9/2017

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## **835 MHz System Verification at 23.0 dBm (200 mW)**


**Area Scan (7x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Peak SAR (extrapolated) = 3.06 W/kg

**SAR(1 g) = 2.1 W/kg**

Deviation(1 g) = 8.14%

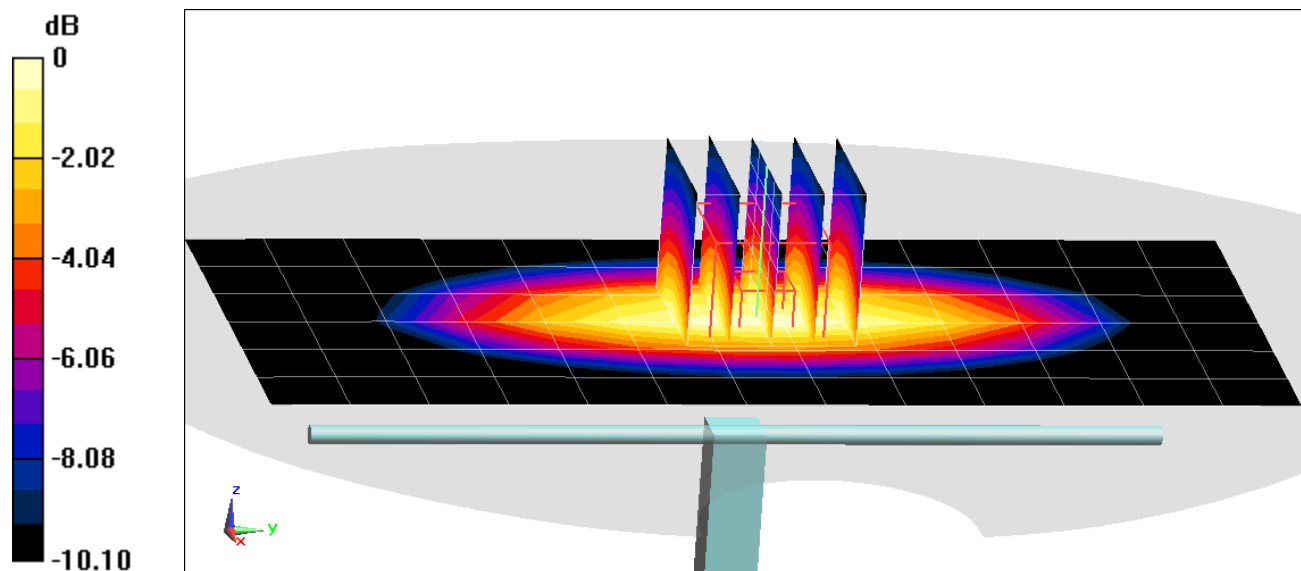

0 dB = 2.45 W/kg = 3.89 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.984 \text{ S/m}$ ;  $\epsilon_r = 54.308$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06-18-2018; Ambient Temp: 21.5°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3914; ConvF(9.57, 9.57, 9.57); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## **835 MHz System Verification at 23.0 dBm (200 mW)**


**Area Scan (7x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Peak SAR (extrapolated) = 3.03 W/kg

**SAR(1 g) = 2.04 W/kg**

Deviation(1 g) = 5.05%

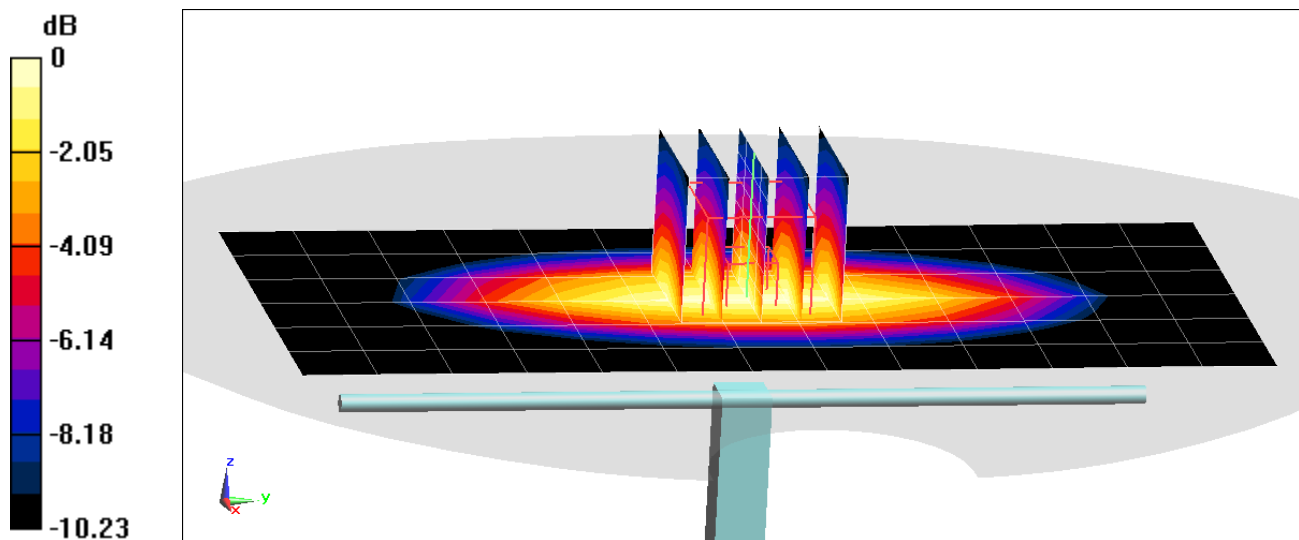

0 dB = 2.71 W/kg = 4.33 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1150**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used:

$f = 1750 \text{ MHz}$ ;  $\sigma = 1.478 \text{ S/m}$ ;  $\epsilon_r = 53.073$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-19-2018; Ambient Temp: 22.6°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3332; ConvF(5.16, 5.16, 5.16); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 1750 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (7x9x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Peak SAR (extrapolated) = 6.43 W/kg

**SAR(1 g) = 3.67 W/kg**

Deviation(1 g) = 0.55%

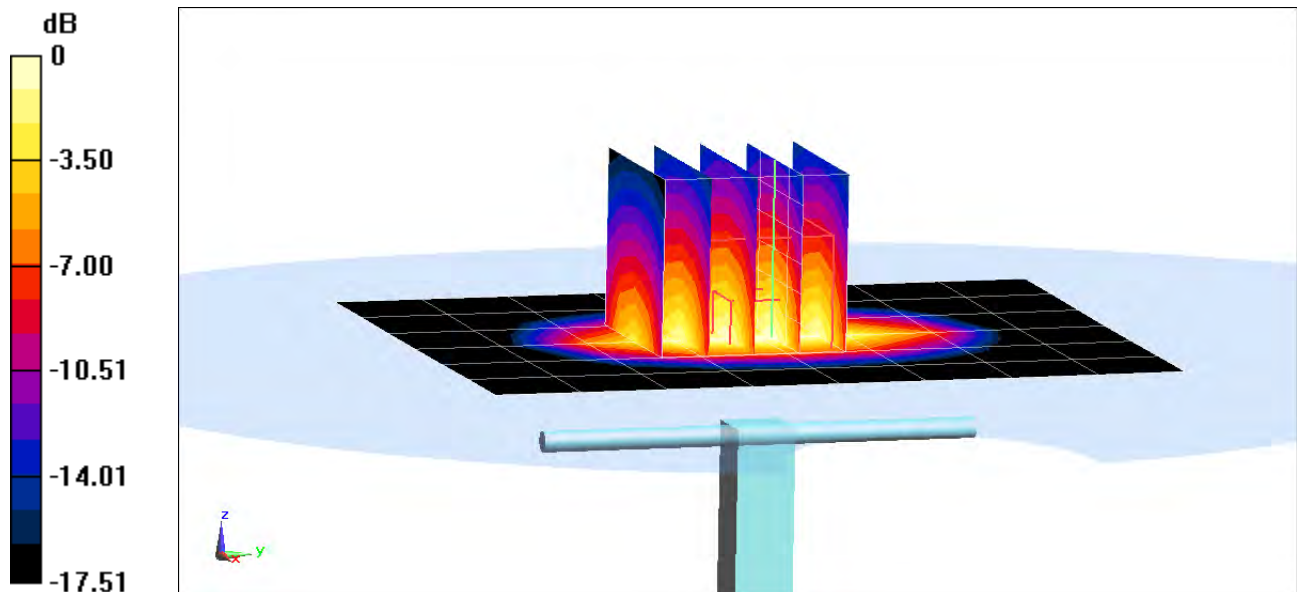

0 dB = 4.57 W/kg = 6.60 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$ ;  $\sigma = 1.562 \text{ S/m}$ ;  $\epsilon_r = 52.265$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-11-2018; Ambient Temp: 21.3°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3287; ConvF(5, 5, 5); Calibrated: 9/18/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 6/21/2017

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1167

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## **1900 MHz System Verification at 20.0 dBm (100 mW)**


**Area Scan (7x10x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.70 W/kg

**SAR(1 g) = 4.27 W/kg**

Deviation(1 g) = 7.83%

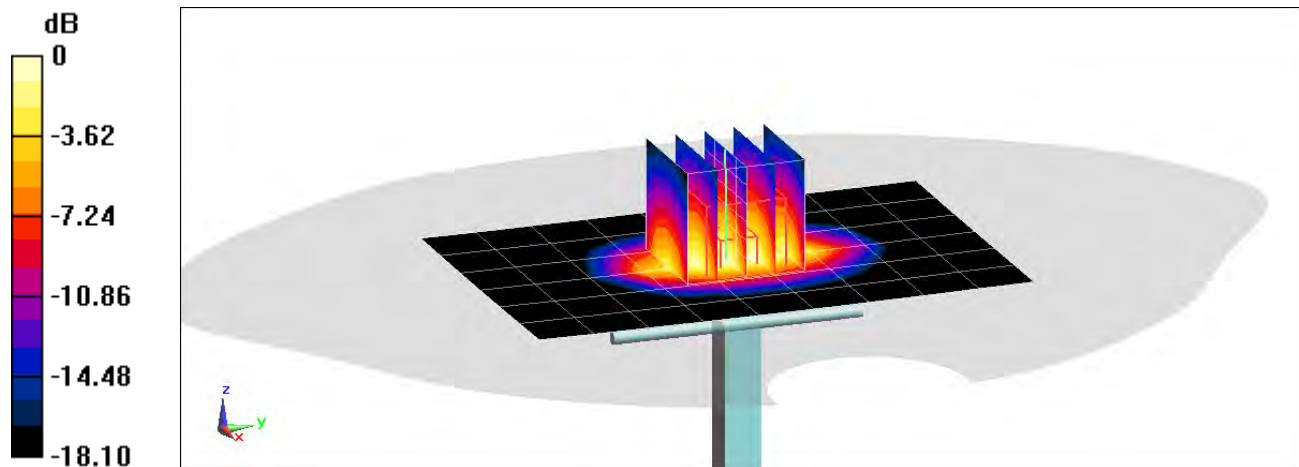

0 dB = 5.42 W/kg = 7.34 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$ ;  $\sigma = 1.575 \text{ S/m}$ ;  $\epsilon_r = 51.579$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-18-2018; Ambient Temp: 21.6°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7406; ConvF(7.74, 7.74, 7.74); Calibrated: 5/22/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/22/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## **1900 MHz System Verification at 20.0 dBm (100 mW)**


**Area Scan (7x11x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.83 W/kg

**SAR(1 g) = 4.2 W/kg**

Deviation(1 g) = 6.06%

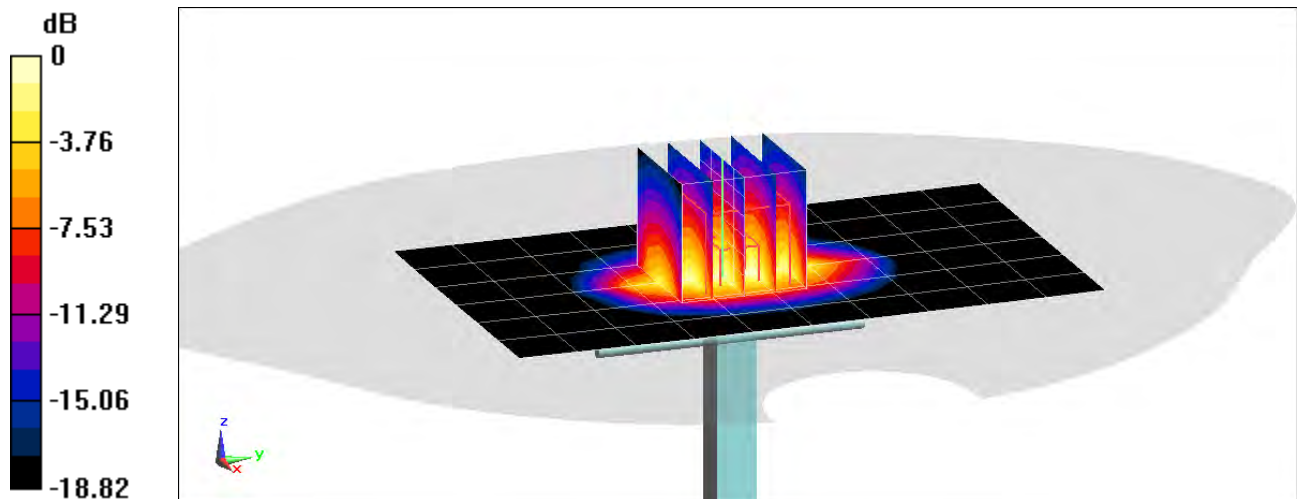

0 dB = 6.51 W/kg = 8.14 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 981**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used:

$f = 2450 \text{ MHz}$ ;  $\sigma = 1.974 \text{ S/m}$ ;  $\epsilon_r = 51.1$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-18-2018; Ambient Temp: 21.5°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7410; ConvF(7.69, 7.69, 7.69); Calibrated: 7/17/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 2450 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Peak SAR (extrapolated) =  $10.2 \text{ W/kg}$

**SAR(1 g) =  $4.85 \text{ W/kg}$**

Deviation(1 g) =  $-4.53\%$

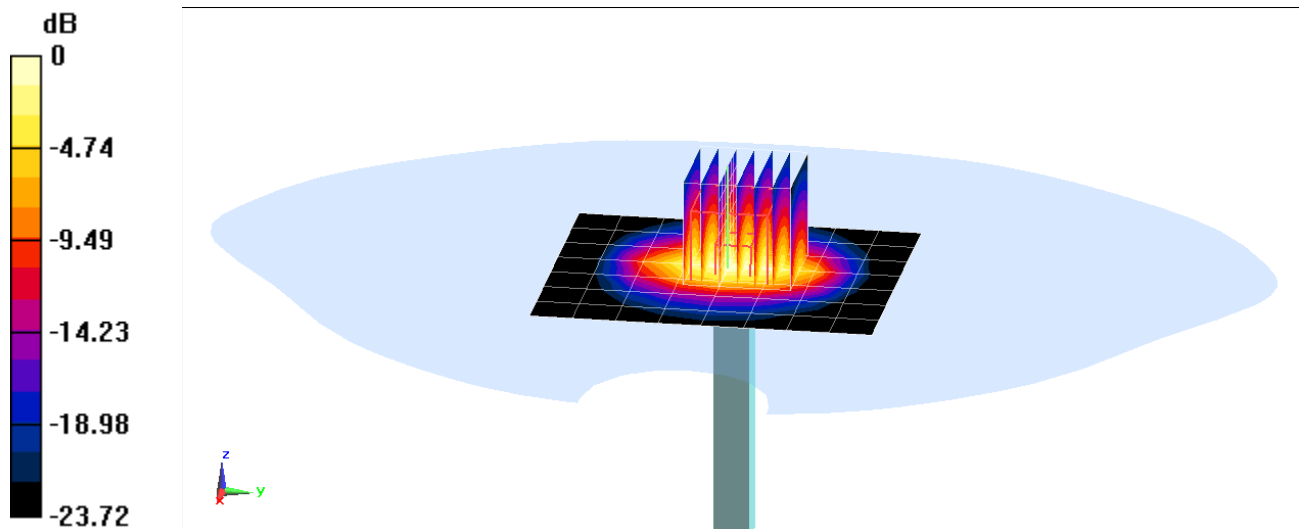

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 882**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used:

$f = 2450 \text{ MHz}$ ;  $\sigma = 2.025 \text{ S/m}$ ;  $\epsilon_r = 50.962$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-26-2018; Ambient Temp: 22.8°C; Tissue Temp: 21.3°C

Probe: ES3DV3 - SN3319; ConvF(4.51, 4.51, 4.51); Calibrated: 3/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/7/2018

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1375

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 2450 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Peak SAR (extrapolated) =  $10.5 \text{ W/kg}$

**SAR(1 g) =  $5.02 \text{ W/kg}$**

Deviation(1 g) = 0.00%

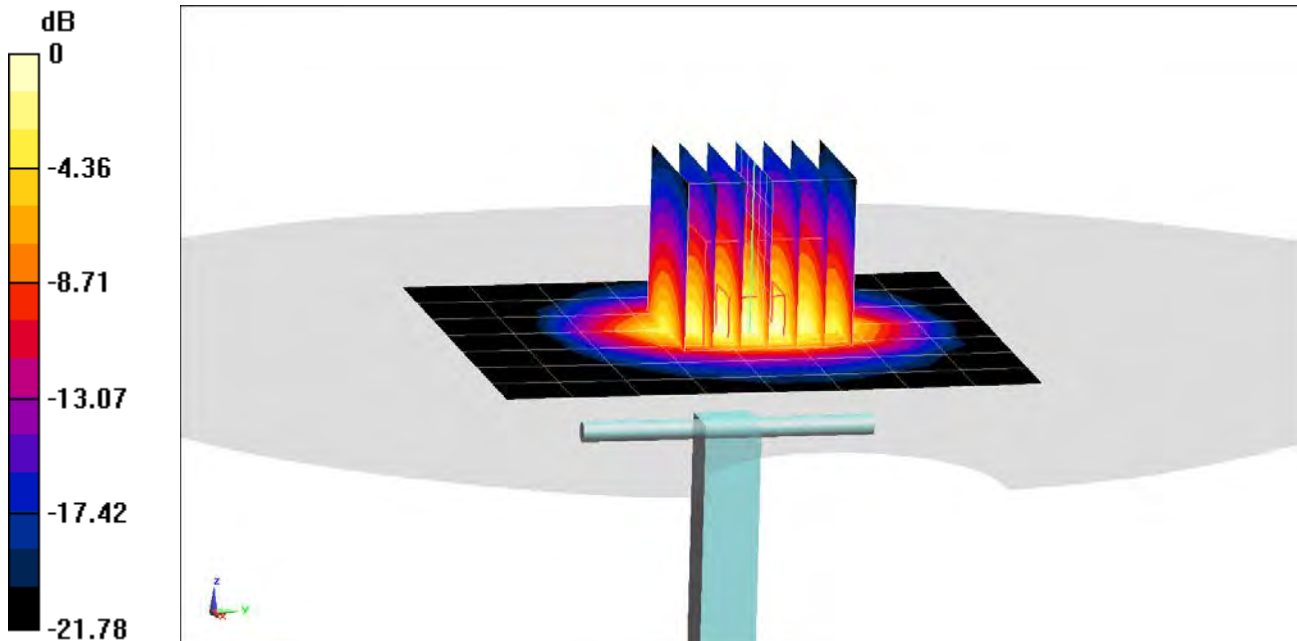

0 dB =  $6.69 \text{ W/kg} = 8.25 \text{ dBW/kg}$

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1071**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used:

$f = 2600$  MHz;  $\sigma = 2.178$  S/m;  $\epsilon_r = 50.574$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-18-2018; Ambient Temp: 21.5°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7410; ConvF(7.43, 7.43, 7.43); Calibrated: 7/17/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 2600 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.7 W/kg

**SAR(1 g) = 5.3 W/kg**

Deviation(1 g) = -2.21%

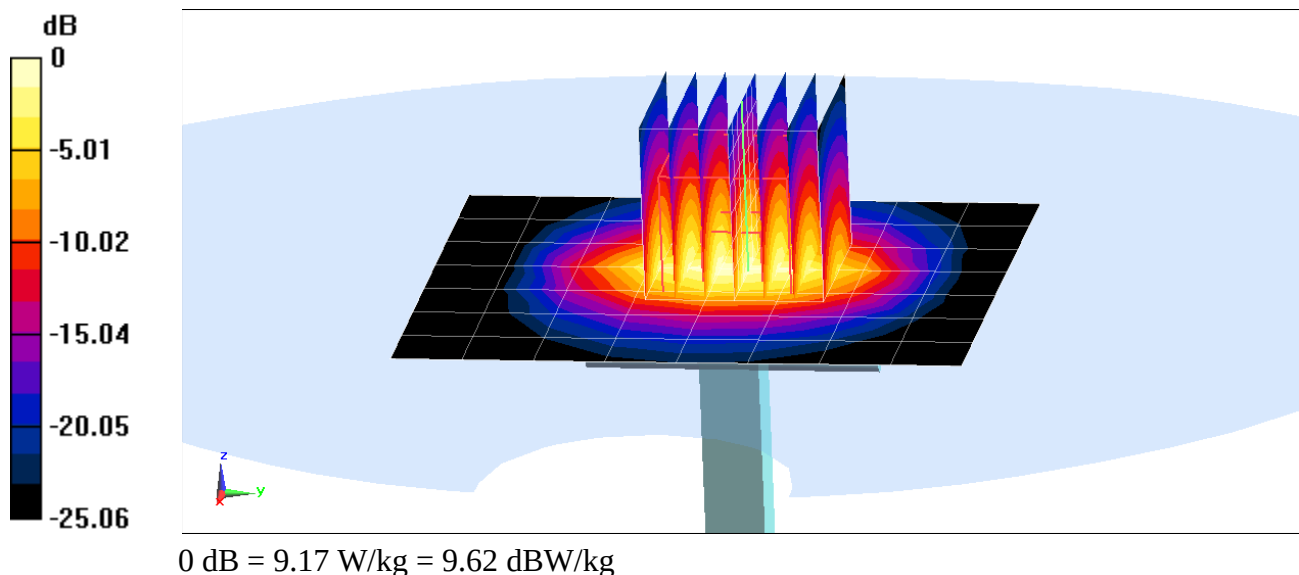

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1004**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used:

$f = 2600$  MHz;  $\sigma = 2.201$  S/m;  $\epsilon_r = 50.515$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-26-2018; Ambient Temp: 22.8°C; Tissue Temp: 21.3°C

Probe: ES3DV3 - SN3319; ConvF(4.33, 4.33, 4.33); Calibrated: 3/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/7/2018

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1375

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 2600 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 12.2 W/kg

**SAR(1 g) = 5.6 W/kg**

Deviation(1 g) = 2.19%

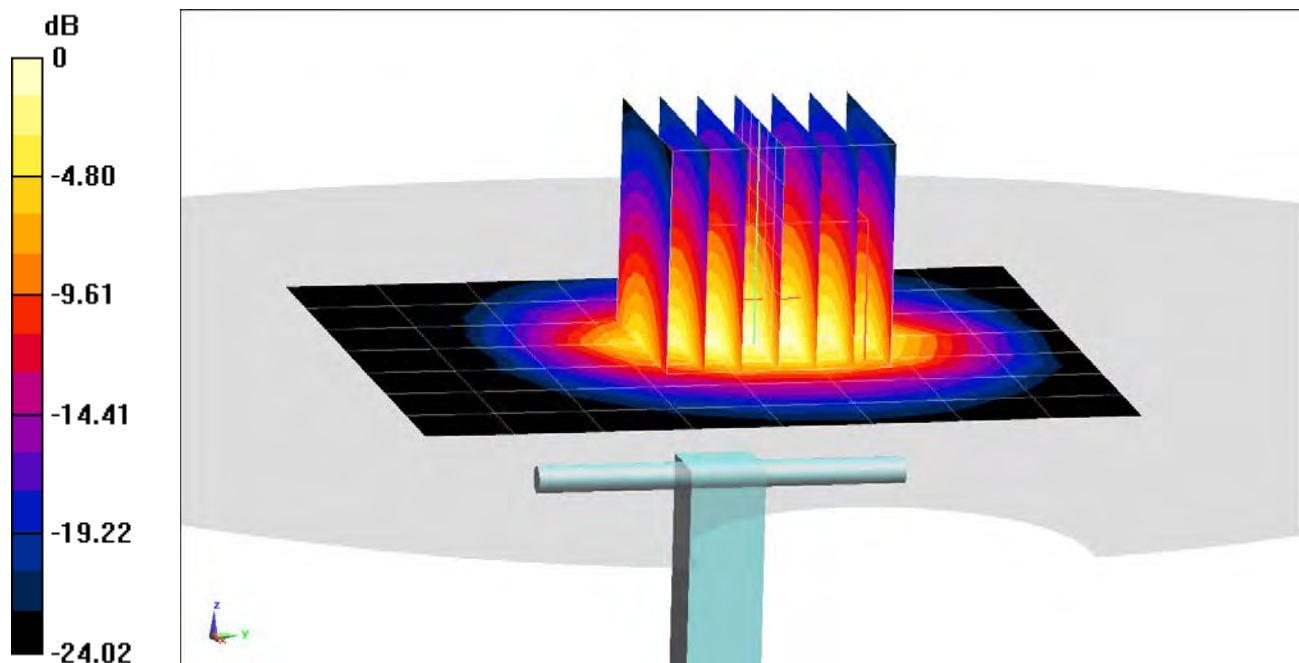

0 dB = 7.42 W/kg = 8.70 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237**

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used (interpolated):

$f = 5250 \text{ MHz}$ ;  $\sigma = 5.457 \text{ S/m}$ ;  $\epsilon_r = 47.505$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-18-2018; Ambient Temp: 23.5°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7357; ConvF(4.78, 4.78, 4.78); Calibrated: 4/18/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2018

Phantom: SAM with CRP v5.0 Left; Type: QD000P40CD; Serial: 1687

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 5250 MHz System Verification at 17.0 dBm (50 mW)


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 14.3 W/kg

**SAR(1 g) = 3.55 W/kg**

Deviation(1 g) = -7.67%

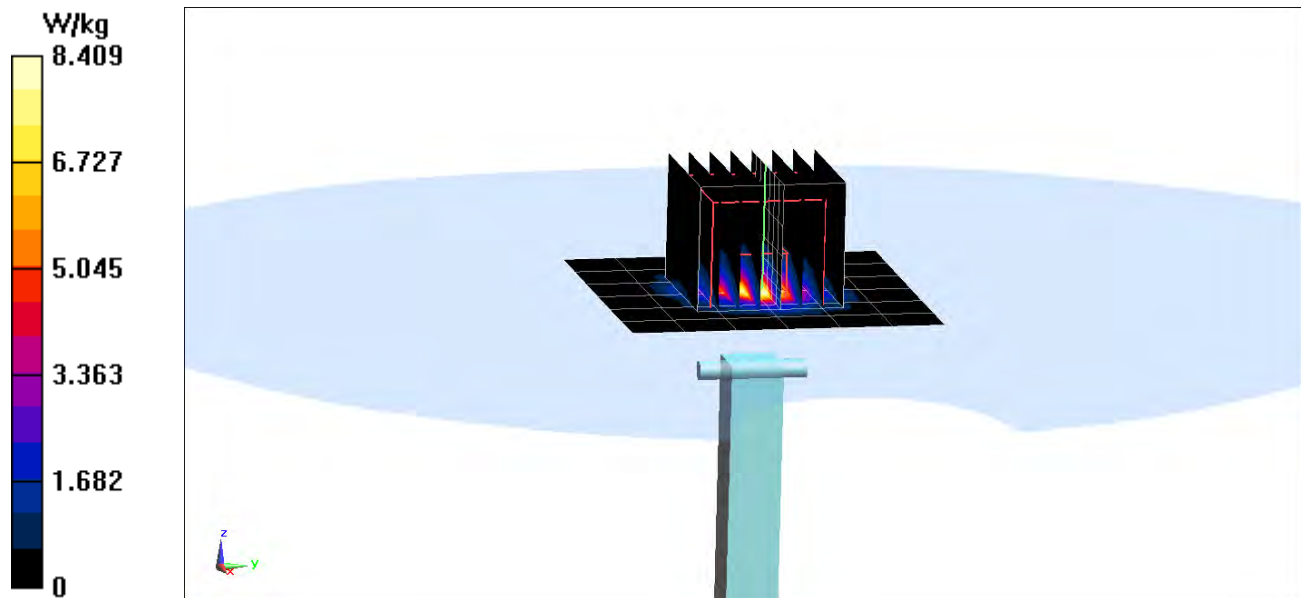



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237**

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used:

$f = 5600 \text{ MHz}$ ;  $\sigma = 5.918 \text{ S/m}$ ;  $\epsilon_r = 46.913$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-18-2018; Ambient Temp: 23.5°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7357; ConvF(4.2, 4.2, 4.2); Calibrated: 4/18/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2018

Phantom: SAM with CRP v5.0 Left; Type: QD000P40CD; Serial: 1687

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 5600 MHz System Verification at 17.0 dBm (50 mW)


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.5 W/kg

**SAR(1 g) = 3.95 W/kg**

Deviation(1 g) = 0.64%

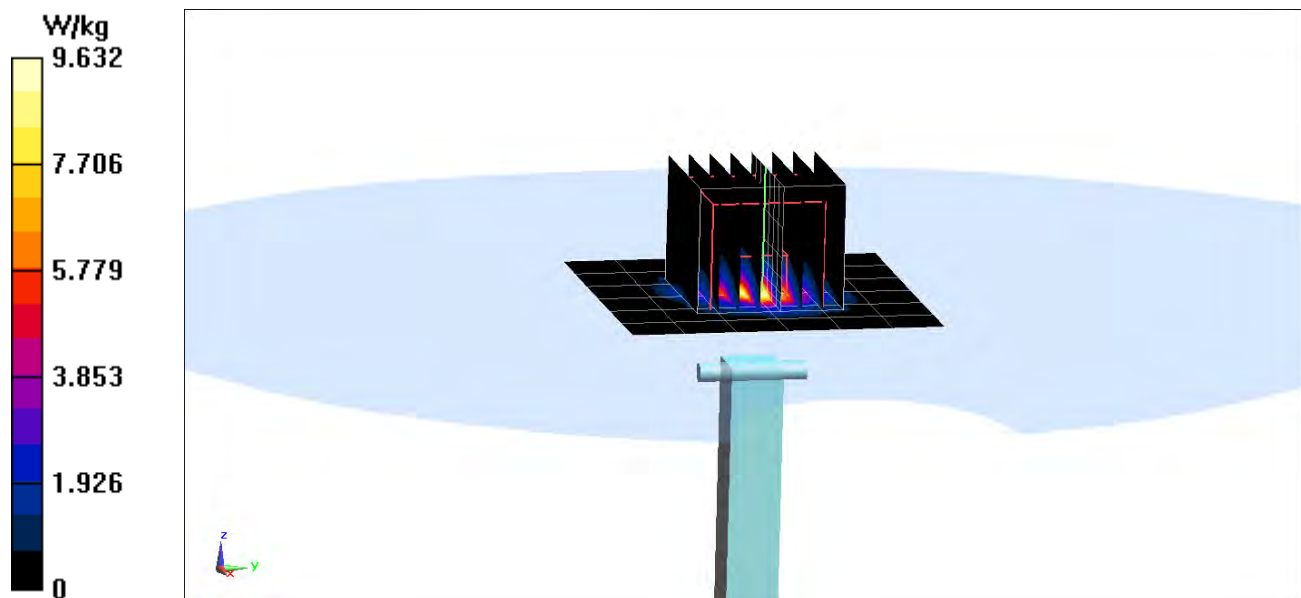

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237**

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used (interpolated):

$f = 5750 \text{ MHz}$ ;  $\sigma = 6.137 \text{ S/m}$ ;  $\epsilon_r = 46.661$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-18-2018; Ambient Temp: 23.5°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7357; ConvF(4.21, 4.21, 4.21); Calibrated: 4/18/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2018

Phantom: SAM with CRP v5.0 Left; Type: QD000P40CD; Serial: 1687

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 5750 MHz System Verification at 17.0 dBm (50 mW)


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.6 W/kg

**SAR(1 g) = 3.60 W/kg**

Deviation(1 g) = -6.61%

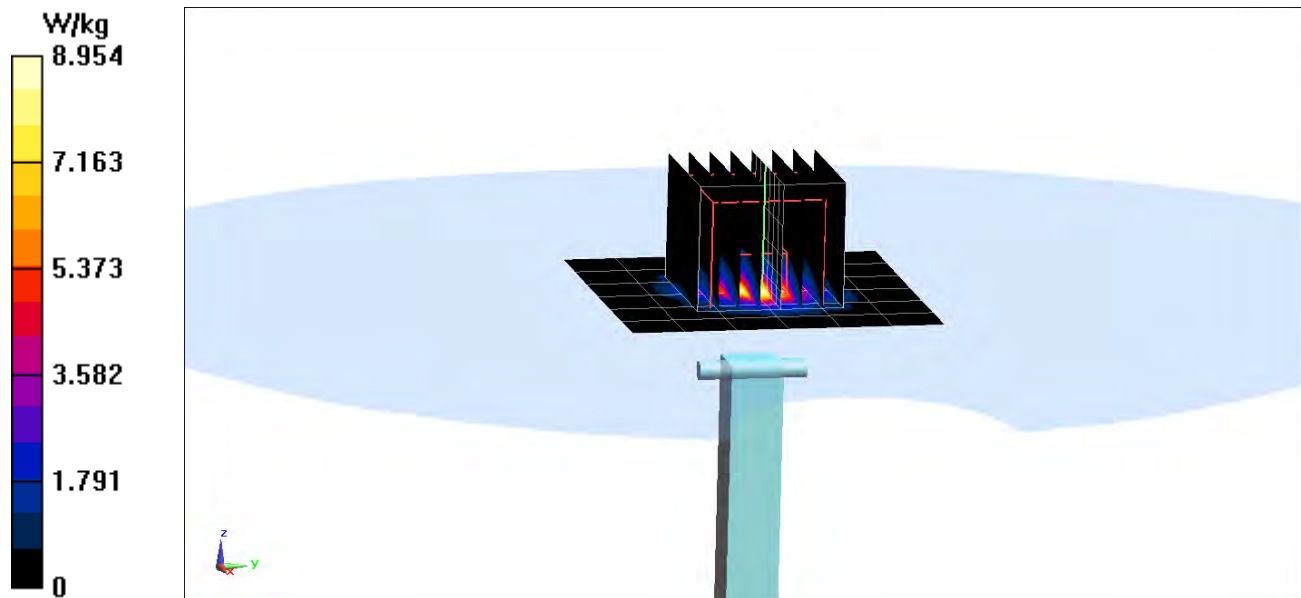

## APPENDIX C: PROBE CALIBRATION



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D750V3-1003\_Jan18**

## CALIBRATION CERTIFICATE

Object **D750V3 - SN:1003**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **January 15, 2018**

*BN*  
*01-25-2018*

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter NRP             | SN: 104778         | 04-Apr-17 (No. 217-02521/02522)   | Apr-18                 |
| Power sensor NRP-Z91        | SN: 103244         | 04-Apr-17 (No. 217-02521)         | Apr-18                 |
| Power sensor NRP-Z91        | SN: 103245         | 04-Apr-17 (No. 217-02522)         | Apr-18                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 07-Apr-17 (No. 217-02528)         | Apr-18                 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 07-Apr-17 (No. 217-02529)         | Apr-18                 |
| Reference Probe EX3DV4      | SN: 7349           | 30-Dec-17 (No. EX3-7349_Dec17)    | Dec-18                 |
| DAE4                        | SN: 601            | 26-Oct-17 (No. DAE4-601_Oct17)    | Oct-18                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| Power meter EPM-442A        | SN: GB37480704     | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A       | SN: US37292783     | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A       | SN: MY41092317     | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| RF generator R&S SMT-06     | SN: 100972         | 15-Jun-15 (in house check Oct-16) | In house check: Oct-18 |
| Network Analyzer HP 8753E   | SN: US37390585     | 18-Oct-01 (in house check Oct-17) | In house check: Oct-18 |

Calibrated by: **Leif Klysner** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Technical Manager

Signature

*Leif Klysner*

*Katja Pokovic*

Issued: January 15, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

## Calibration Laboratory of

Schmid & Partner

Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary:

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                        |             |
|------------------------------|------------------------|-------------|
| DASY Version                 | DASY5                  | V52.10.0    |
| Extrapolation                | Advanced Extrapolation |             |
| Phantom                      | Modular Flat Phantom   |             |
| Distance Dipole Center - TSL | 15 mm                  | with Spacer |
| Zoom Scan Resolution         | dx, dy, dz = 5.0 mm    |             |
| Frequency                    | 750 MHz $\pm$ 1 MHz    |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 41.9           | 0.89 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 40.9 $\pm$ 6 % | 0.90 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 2.10 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 8.28 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 1.37 W/kg                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 5.42 W/kg $\pm$ 16.5 % (k=2) |

## Body TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Body TSL parameters             | 22.0 °C             | 55.5           | 0.96 mho/m           |
| Measured Body TSL parameters            | (22.0 $\pm$ 0.2) °C | 55.0 $\pm$ 6 % | 0.96 mho/m $\pm$ 6 % |
| Body TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Body TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 2.15 W/kg                    |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 8.58 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 1.43 W/kg                    |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 5.71 W/kg $\pm$ 16.5 % (k=2) |

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 53.8 $\Omega$ - 2.1 j $\Omega$ |
| Return Loss                          | - 27.6 dB                      |

### Antenna Parameters with Body TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 49.2 $\Omega$ - 6.2 j $\Omega$ |
| Return Loss                          | - 24.0 dB                      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.043 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |                  |
|-----------------|------------------|
| Manufactured by | SPEAG            |
| Manufactured on | January 21, 2009 |

## Appendix (Additional assessments outside the scope of SCS 0108)

### Measurement Conditions

DASY system configuration, as far as not given on page 1 and 3.

|         |                  |                             |
|---------|------------------|-----------------------------|
| Phantom | SAM Head Phantom | For usage with cSAR3DV2-R/L |
|---------|------------------|-----------------------------|

### SAR result with SAM Head (Top)

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                          |
|-------------------------------------------------------|--------------------|--------------------------|
| SAR measured                                          | 250 mW input power | 1.98 W/kg                |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 7.94 W/kg ± 17.5 % (k=2) |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR measured                                            | 250 mW input power | 1.33 W/kg                |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 5.32 W/kg ± 16.9 % (k=2) |

### SAR result with SAM Head (Mouth)

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                          |
|-------------------------------------------------------|--------------------|--------------------------|
| SAR measured                                          | 250 mW input power | 2.05 W/kg                |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 8.22 W/kg ± 17.5 % (k=2) |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR measured                                            | 250 mW input power | 1.38 W/kg                |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 5.52 W/kg ± 16.9 % (k=2) |

### SAR result with SAM Head (Neck)

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                          |
|-------------------------------------------------------|--------------------|--------------------------|
| SAR measured                                          | 250 mW input power | 2.01 W/kg                |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 8.06 W/kg ± 17.5 % (k=2) |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR measured                                            | 250 mW input power | 1.38 W/kg                |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 5.52 W/kg ± 16.9 % (k=2) |

### SAR result with SAM Head (Ear)

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                          |
|-------------------------------------------------------|--------------------|--------------------------|
| SAR measured                                          | 250 mW input power | 1.67 W/kg                |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 6.70 W/kg ± 17.5 % (k=2) |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR measured                                            | 250 mW input power | 1.15 W/kg                |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 4.60 W/kg ± 16.9 % (k=2) |



## DASY5 Validation Report for Head TSL

Date: 12.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1003**

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.9$  S/m;  $\epsilon_r = 40.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.22, 10.22, 10.22); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.11 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.15 W/kg

**SAR(1 g) = 2.1 W/kg; SAR(10 g) = 1.37 W/kg**

Maximum value of SAR (measured) = 2.80 W/kg

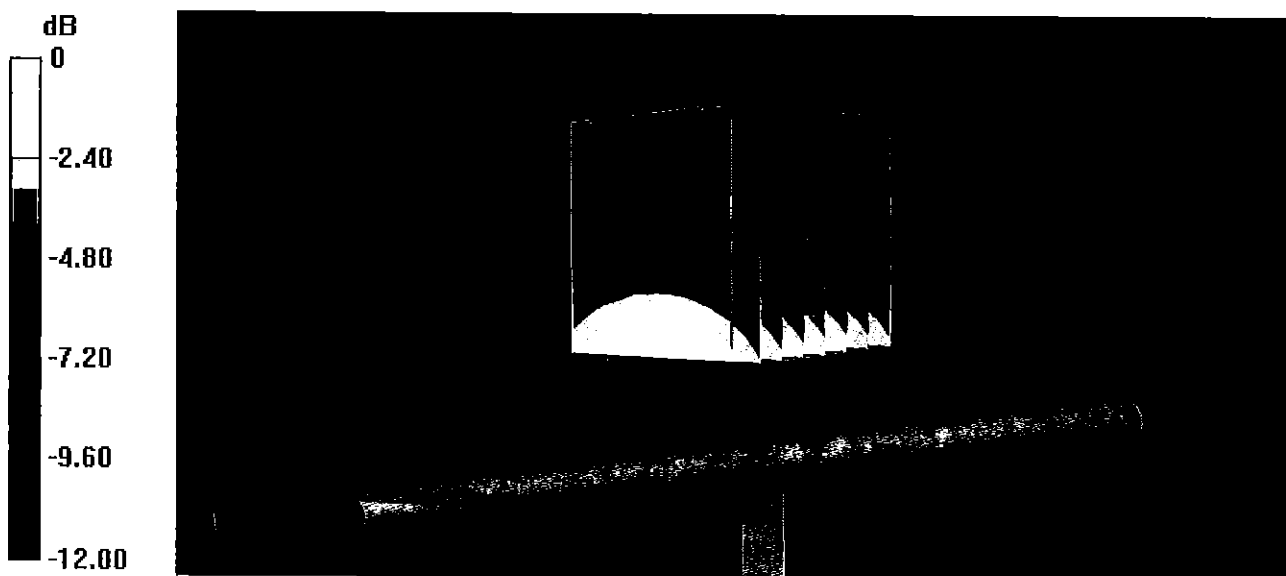


0 dB = 2.80 W/kg = 4.47 dBW/kg

Impedance Measurement Plot for Head TSL

12 Jan 2018 13:14:07  
CH1 S11 1 U FS 1: 53.754  $\Omega$  -2.0996  $\Omega$  101.07 pF 750.000 000 MHz

\*  
Del  
CA

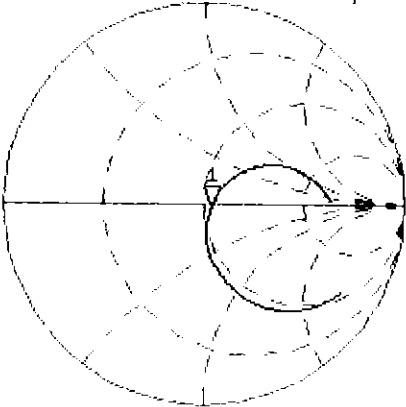


Avg  
16  
H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-27.643 dB 750.000 000 MHz

CA

Avg  
16  
H1d

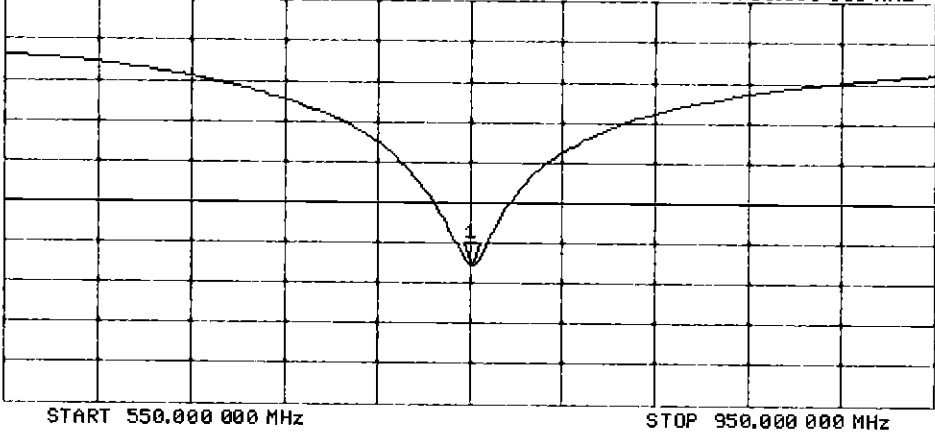

## DASY5 Validation Report for Body TSL

Date: 12.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1003**

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.96 \text{ S/m}$ ;  $\epsilon_r = 55$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.19, 10.19, 10.19); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x8x7)/Cube 0:**


Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 57.31 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.17 W/kg

**SAR(1 g) = 2.15 W/kg; SAR(10 g) = 1.43 W/kg**


Maximum value of SAR (measured) = 2.83 W/kg

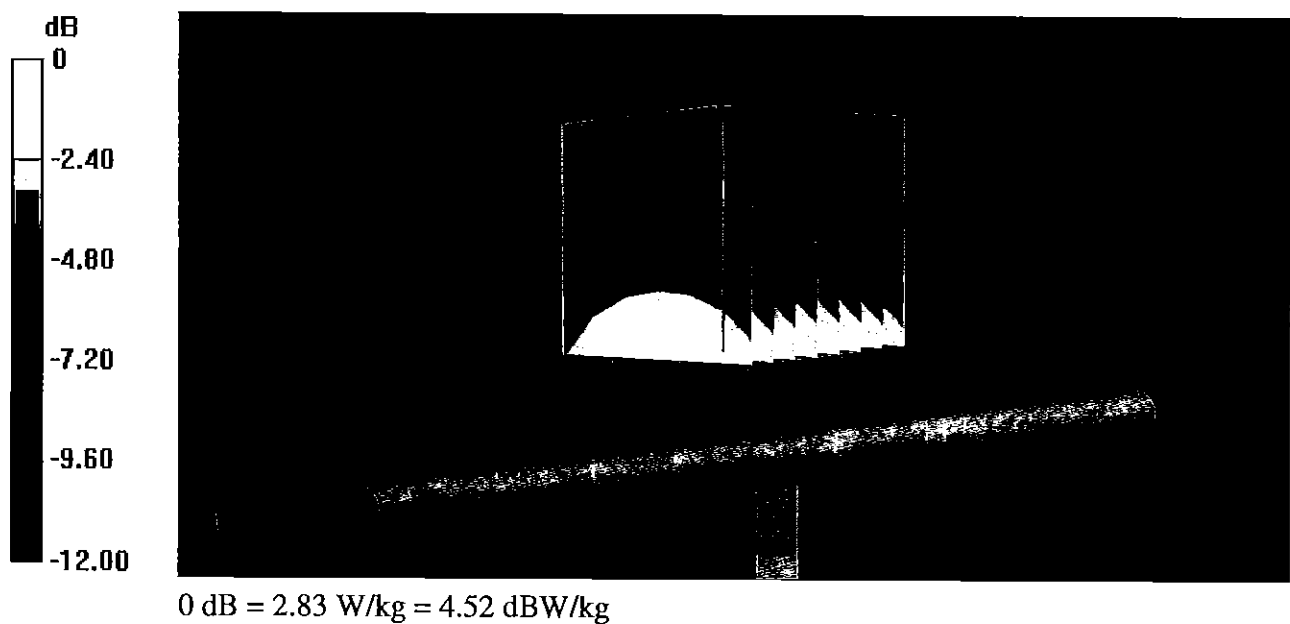

Impedance Measurement Plot for Body TSL

CH1 S11 1 U FS 12 Jan 2018 13:13:21  
1: 49.234  $\Omega$  -6.1934  $\Omega$  34.264 pF 750.000 000 MHz

\*  
De1  
CA

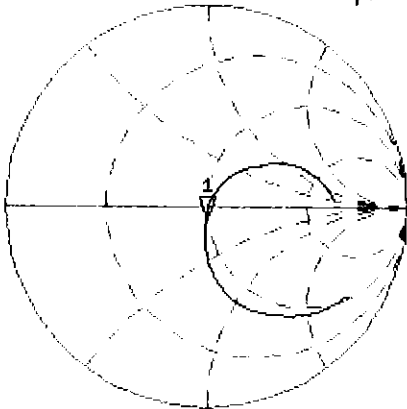


Avg  
16  
H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-24.047 dB 750.000 000 MHz

CA

Avg  
16

H1d

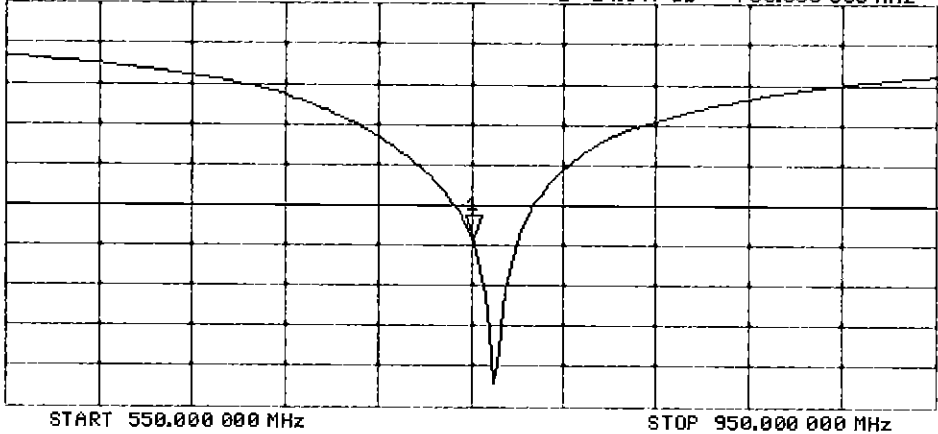

## DASY5 Validation Report for SAM Head

Date: 15.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1003**

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.9 \text{ S/m}$ ;  $\epsilon_r = 44.2$ ;  $\rho = 1000 \text{ kg/m}^3$

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.22, 10.22, 10.22); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: SAM Head
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**SAM Head/Top/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 56.79 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.89 W/kg

**SAR(1 g) = 1.98 W/kg; SAR(10 g) = 1.33 W/kg**

Maximum value of SAR (measured) = 2.58 W/kg

**SAM Head/Mouth/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 56.85 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 2.94 W/kg

**SAR(1 g) = 2.05 W/kg; SAR(10 g) = 1.38 W/kg**

Maximum value of SAR (measured) = 2.62 W/kg

**SAM Head/Neck/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 56.29 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.78 W/kg

**SAR(1 g) = 2.01 W/kg; SAR(10 g) = 1.38 W/kg**

Maximum value of SAR (measured) = 2.56 W/kg



**SAM Head/Ear/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 51.01 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.31 W/kg

**SAR(1 g) = 1.67 W/kg; SAR(10 g) = 1.15 W/kg**

Maximum value of SAR (measured) = 2.11 W/kg

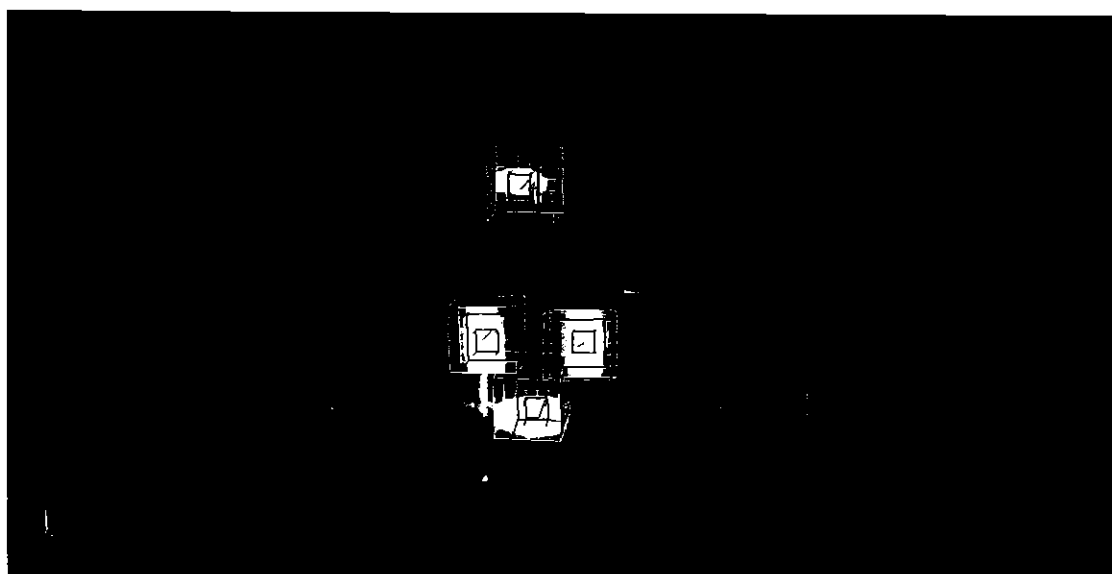

0 dB = 2.58 W/kg = 4.12 dBW/kg



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D835V2-4d132\_Jan18**

## CALIBRATION CERTIFICATE

Object **D835V2 - SN:4d132**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **January 15, 2018**

BNV  
01-25-2018

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter NRP             | SN: 104778         | 04-Apr-17 (No. 217-02521/02522)   | Apr-18                 |
| Power sensor NRP-Z91        | SN: 103244         | 04-Apr-17 (No. 217-02521)         | Apr-18                 |
| Power sensor NRP-Z91        | SN: 103245         | 04-Apr-17 (No. 217-02522)         | Apr-18                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 07-Apr-17 (No. 217-02528)         | Apr-18                 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 07-Apr-17 (No. 217-02529)         | Apr-18                 |
| Reference Probe EX3DV4      | SN: 7349           | 30-Dec-17 (No. EX3-7349_Dec17)    | Dec-18                 |
| DAE4                        | SN: 601            | 26-Oct-17 (No. DAE4-601_Oct17)    | Oct-18                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| Power meter EPM-442A        | SN: GB37480704     | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A       | SN: US37292783     | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A       | SN: MY41092317     | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| RF generator R&S SMT-06     | SN: 100972         | 15-Jun-15 (in house check Oct-16) | In house check: Oct-18 |
| Network Analyzer HP 8753E   | SN: US37390585     | 18-Oct-01 (in house check Oct-17) | In house check: Oct-18 |

Calibrated by: **Leif Klysner**      Name: **Leif Klysner**      Function: **Laboratory Technician**

Approved by: **Katja Pokovic**      Name: **Katja Pokovic**      Function: **Technical Manager**

Signature

Issued: January 15, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary:

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                        |             |
|------------------------------|------------------------|-------------|
| DASY Version                 | DASY5                  | V52.10.0    |
| Extrapolation                | Advanced Extrapolation |             |
| Phantom                      | Modular Flat Phantom   |             |
| Distance Dipole Center - TSL | 10 mm                  | with Spacer |
| Zoom Scan Resolution         | dx, dy, dz = 5.0 mm    |             |
| Frequency                    | 835 MHz $\pm$ 1 MHz    |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 41.5           | 0.90 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 40.7 $\pm$ 6 % | 0.92 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 2.39 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 9.36 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 1.55 W/kg                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 6.10 W/kg $\pm$ 16.5 % (k=2) |

## Body TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Body TSL parameters             | 22.0 °C             | 55.2           | 0.97 mho/m           |
| Measured Body TSL parameters            | (22.0 $\pm$ 0.2) °C | 54.8 $\pm$ 6 % | 0.99 mho/m $\pm$ 6 % |
| Body TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Body TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 2.47 W/kg                    |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 9.71 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 1.62 W/kg                    |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 6.39 W/kg $\pm$ 16.5 % (k=2) |

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 51.8 $\Omega$ - 2.9 j $\Omega$ |
| Return Loss                          | - 29.5 dB                      |

### Antenna Parameters with Body TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 47.4 $\Omega$ - 5.7 j $\Omega$ |
| Return Loss                          | - 23.9 dB                      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.386 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |               |
|-----------------|---------------|
| Manufactured by | SPEAG         |
| Manufactured on | July 22, 2011 |

## Appendix (Additional assessments outside the scope of SCS 0108)

### Measurement Conditions

DASY system configuration, as far as not given on page 1 and 3.

|         |                  |                             |
|---------|------------------|-----------------------------|
| Phantom | SAM Head Phantom | For usage with cSAR3DV2-R/L |
|---------|------------------|-----------------------------|

### SAR result with SAM Head (Top)

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR measured                                          | 250 mW input power | 2.40 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 9.41 W/kg $\pm$ 17.5 % (k=2) |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR measured                                            | 250 mW input power | 1.58 W/kg                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 6.21 W/kg $\pm$ 16.9 % (k=2) |

### SAR result with SAM Head (Mouth)

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR measured                                          | 250 mW input power | 2.47 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 9.69 W/kg $\pm$ 17.5 % (k=2) |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR measured                                            | 250 mW input power | 1.64 W/kg                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 6.45 W/kg $\pm$ 16.9 % (k=2) |

### SAR result with SAM Head (Neck)

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR measured                                          | 250 mW input power | 2.35 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 9.22 W/kg $\pm$ 17.5 % (k=2) |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR measured                                            | 250 mW input power | 1.59 W/kg                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 6.25 W/kg $\pm$ 16.9 % (k=2) |

### SAR result with SAM Head (Ear)

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR measured                                          | 250 mW input power | 2.03 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 7.96 W/kg $\pm$ 17.5 % (k=2) |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR measured                                            | 250 mW input power | 1.37 W/kg                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 5.39 W/kg $\pm$ 16.9 % (k=2) |

## DASY5 Validation Report for Head TSL

Date: 08.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d132**

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.92$  S/m;  $\epsilon_r = 40.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.9, 9.9, 9.9); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 63.23 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.64 W/kg

**SAR(1 g) = 2.39 W/kg; SAR(10 g) = 1.55 W/kg**

Maximum value of SAR (measured) = 3.22 W/kg




0 dB = 3.22 W/kg = 5.08 dBW/kg

# Impedance Measurement Plot for Head TSL

8 Jan 2018 16:29:07  
 CH1 S11 1 U FS 1: 51.768  $\Omega$  -2.8984  $\Omega$  65.761 pF 835.000 000 MHz

\*  
 Del  
 Cor

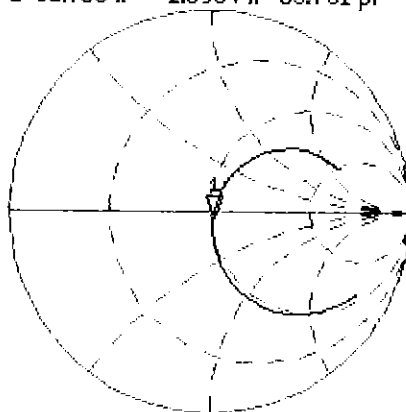

Avg  
 16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-29.535 dB 835.000 000 MHz

Cor

Avg  
 16

H1d

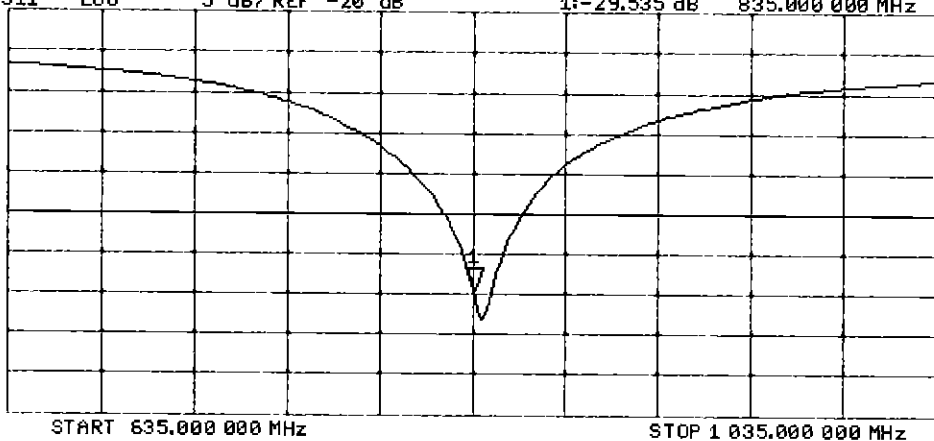

## DASY5 Validation Report for Body TSL

Date: 08.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d132**

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.99$  S/m;  $\epsilon_r = 54.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.05, 10.05, 10.05); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 60.55 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 3.66 W/kg

**SAR(1 g) = 2.47 W/kg; SAR(10 g) = 1.62 W/kg**

Maximum value of SAR (measured) = 3.24 W/kg

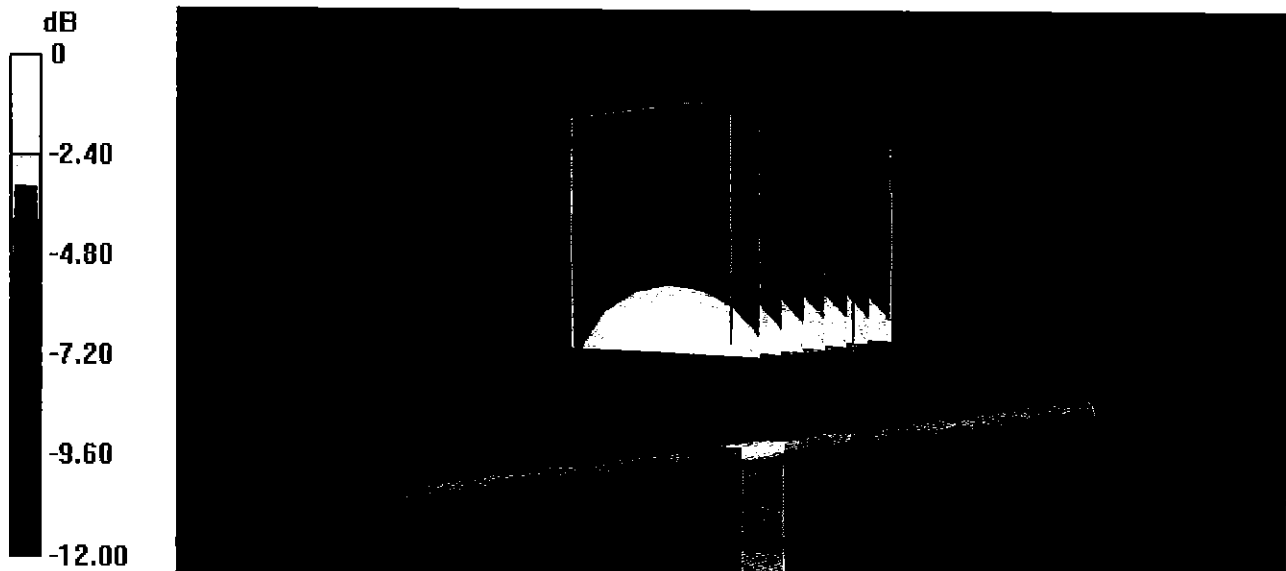


0 dB = 3.24 W/kg = 5.11 dBW/kg


Impedance Measurement Plot for Body TSL

8 Jan 2018 16:27:09  
CH1 S11 1 U FS 1: 47.447  $\Omega$  -5.6680  $\Omega$  33.628 pF 835.000 000 MHz

\*  
De1  
Cor

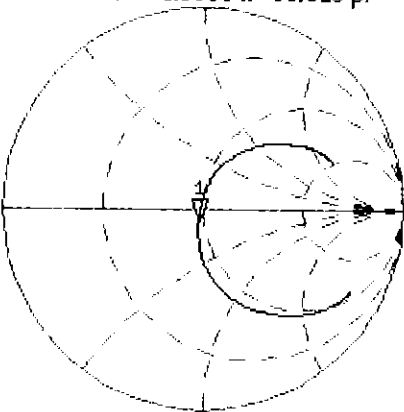

Avg  
16  
H1d

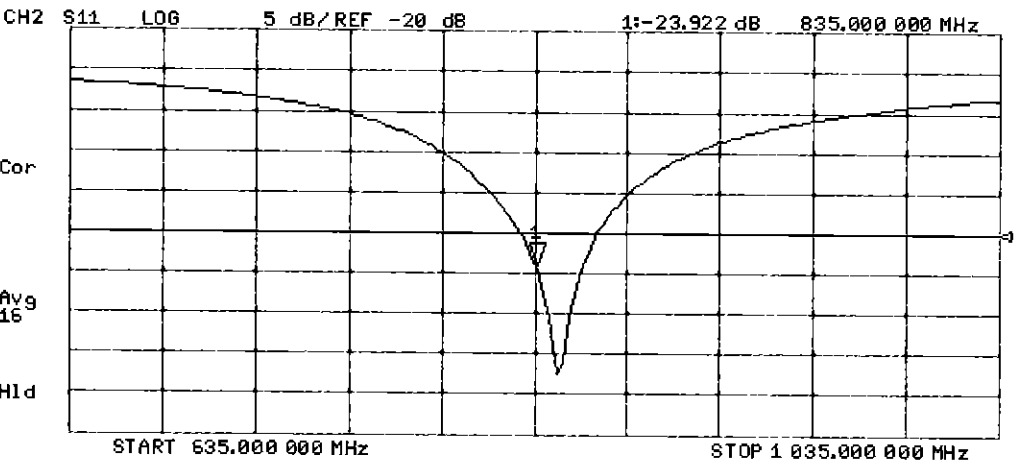

## DASY5 Validation Report for SAM Head

Date: 15.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d132**

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.94 \text{ S/m}$ ;  $\epsilon_r = 44.1$ ;  $\rho = 1000 \text{ kg/m}^3$

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.9, 9.9, 9.9); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: SAM Head
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**SAM Head/Top/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 61.00 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.56 W/kg

**SAR(1 g) = 2.4 W/kg; SAR(10 g) = 1.58 W/kg**

Maximum value of SAR (measured) = 3.16 W/kg

**SAM Head/Mouth/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 60.99 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.65 W/kg

**SAR(1 g) = 2.47 W/kg; SAR(10 g) = 1.64 W/kg**

Maximum value of SAR (measured) = 3.19 W/kg

**SAM Head/Neck/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 59.20 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 3.33 W/kg

**SAR(1 g) = 2.35 W/kg; SAR(10 g) = 1.59 W/kg**

Maximum value of SAR (measured) = 3.04 W/kg

**SAM Head/Ear/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$


Reference Value = 55.03 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.90 W/kg

**SAR(1 g) = 2.03 W/kg; SAR(10 g) = 1.37 W/kg**

Maximum value of SAR (measured) = 2.61 W/kg



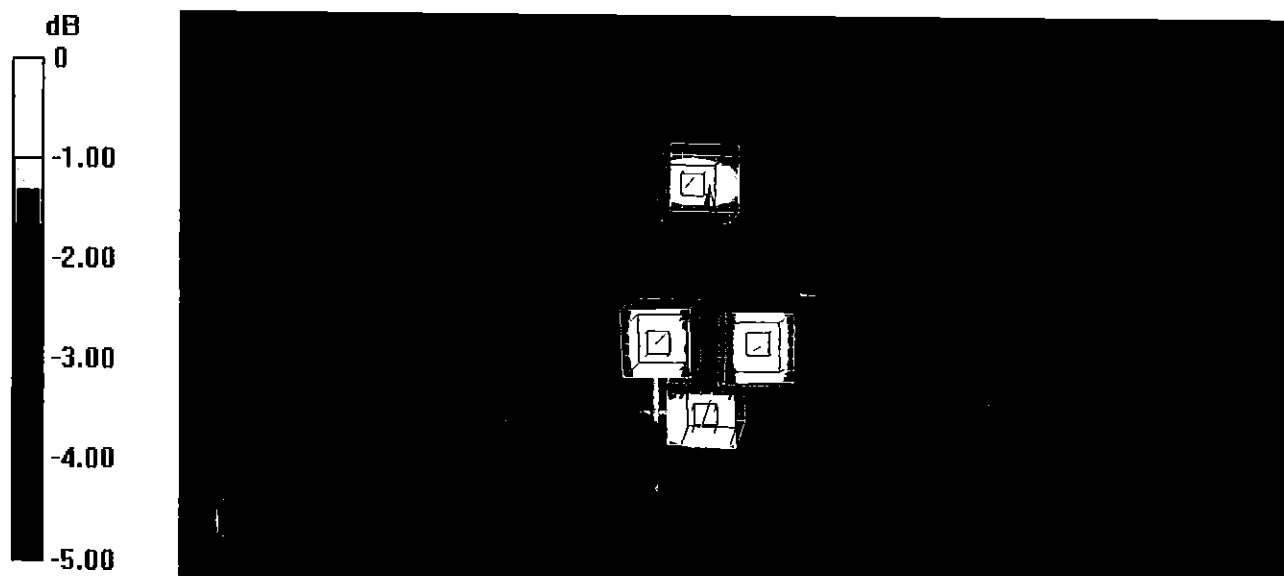

0 dB = 2.61 W/kg = 4.17 dBW/kg



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D1750V2-1150\_Jul16**

## CALIBRATION CERTIFICATE

Object **D1750V2 - SN:1150**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **July 14, 2016**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter NRP             | SN: 104778         | 06-Apr-16 (No. 217-02288/02289)   | Apr-17                 |
| Power sensor NRP-Z91        | SN: 103244         | 06-Apr-16 (No. 217-02288)         | Apr-17                 |
| Power sensor NRP-Z91        | SN: 103245         | 06-Apr-16 (No. 217-02289)         | Apr-17                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 05-Apr-16 (No. 217-02292)         | Apr-17                 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 05-Apr-16 (No. 217-02295)         | Apr-17                 |
| Reference Probe EX3DV4      | SN: 7349           | 15-Jun-16 (No. EX3-7349_Jun16)    | Jun-17                 |
| DAE4                        | SN: 601            | 30-Dec-15 (No. DAE4-601_Dec15)    | Dec-16                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| Power meter EPM-442A        | SN: GB37480704     | 07-Oct-15 (No. 217-02222)         | In house check: Oct-16 |
| Power sensor HP 8481A       | SN: US37292783     | 07-Oct-15 (No. 217-02222)         | In house check: Oct-16 |
| Power sensor HP 8481A       | SN: MY41092317     | 07-Oct-15 (No. 217-02223)         | In house check: Oct-16 |
| RF generator R&S SMT-06     | SN: 100972         | 15-Jun-15 (in house check Jun-15) | In house check: Oct-16 |
| Network Analyzer HP 8753E   | SN: US37390585     | 18-Oct-01 (in house check Oct-15) | In house check: Oct-16 |

Calibrated by: **Name** Jeton Kastrati **Function** Laboratory Technician

Approved by: **Name** Katja Pokovic **Technical Manager**

Signature

*[Handwritten signatures]*

Issued: July 14, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary:

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                        |             |
|------------------------------|------------------------|-------------|
| DASY Version                 | DASY5                  | V52.8.8     |
| Extrapolation                | Advanced Extrapolation |             |
| Phantom                      | Modular Flat Phantom   |             |
| Distance Dipole Center - TSL | 10 mm                  | with Spacer |
| Zoom Scan Resolution         | dx, dy, dz = 5 mm      |             |
| Frequency                    | 1750 MHz $\pm$ 1 MHz   |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 40.1           | 1.37 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 38.8 $\pm$ 6 % | 1.36 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 9.06 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 36.1 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 4.80 W/kg                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 19.2 W/kg $\pm$ 16.5 % (k=2) |

## Body TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Body TSL parameters             | 22.0 °C             | 53.4           | 1.49 mho/m           |
| Measured Body TSL parameters            | (22.0 $\pm$ 0.2) °C | 53.4 $\pm$ 6 % | 1.48 mho/m $\pm$ 6 % |
| Body TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Body TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 9.09 W/kg                    |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 36.5 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 4.85 W/kg                    |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 19.5 W/kg $\pm$ 16.5 % (k=2) |

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $50.9 \Omega + 0.4 j\Omega$ |
| Return Loss                          | - 40.2 dB                   |

### Antenna Parameters with Body TSL

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $46.4 \Omega - 0.5 j\Omega$ |
| Return Loss                          | - 28.5 dB                   |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.218 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |                |
|-----------------|----------------|
| Manufactured by | SPEAG          |
| Manufactured on | April 10, 2015 |

## DASY5 Validation Report for Head TSL

Date: 14.07.2016

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1750 MHz D1750V2; Type: D1750V2; Serial: D1750V2 - SN:1150**

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 38.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.46, 8.46, 8.46); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

**Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 104.4 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 16.6 W/kg

**SAR(1 g) = 9.06 W/kg; SAR(10 g) = 4.8 W/kg**

Maximum value of SAR (measured) = 13.9 W/kg

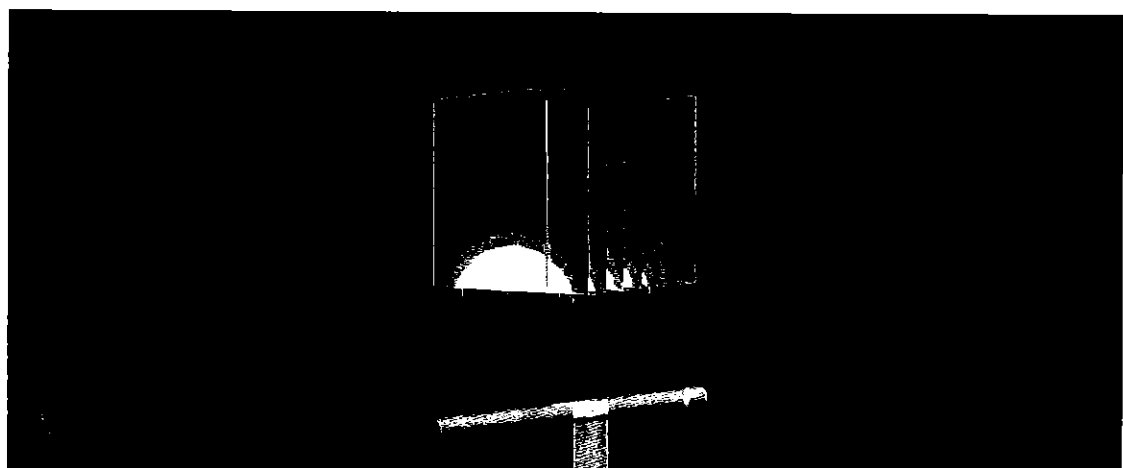


0 dB = 13.9 W/kg = 11.43 dBW/kg

Impedance Measurement Plot for Head TSL


14 Jul 2016 13:09:21  
[CH1] S11 1 U FS 2: 50.889  $\Omega$  0.4121  $\Omega$  37.479 pF 1 750.000 000 MHz

\*  
De1  
CA  
Avg  
16  
H1d

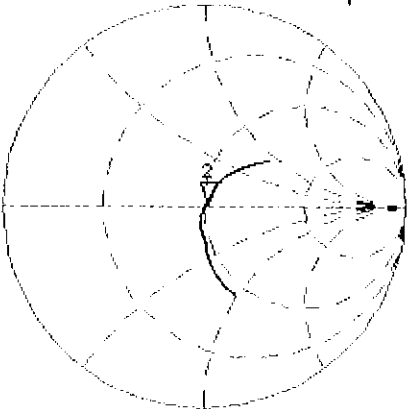

CH2 S11 LOG 5 dB/REF -20 dB 2:-40.230 dB 1 750.000 000 MHz

CA  
Avg  
16  
H1d

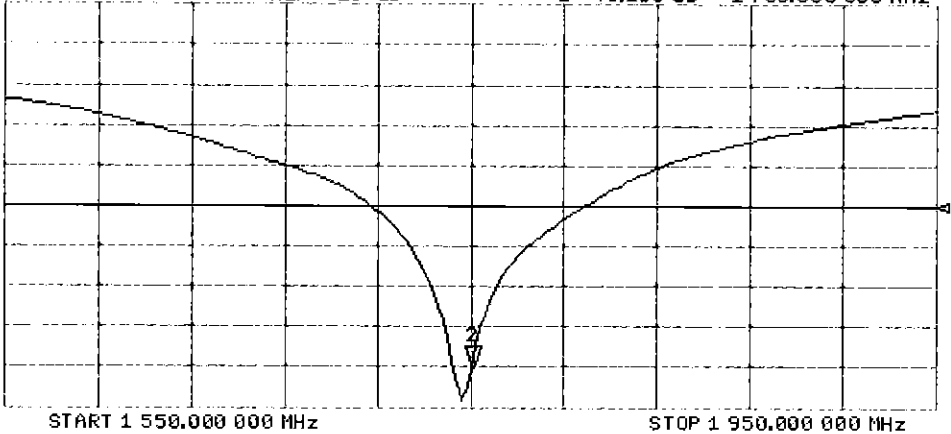

## DASY5 Validation Report for Body TSL

Date: 14.07.2016

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1750 MHz D1750V2; Type: D1750V2; Serial: D1750V2 - SN:1150**

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.48$  S/m;  $\epsilon_r = 53.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.25, 8.25, 8.25); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 100.4 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 16.0 W/kg

**SAR(1 g) = 9.09 W/kg; SAR(10 g) = 4.85 W/kg**

Maximum value of SAR (measured) = 13.7 W/kg

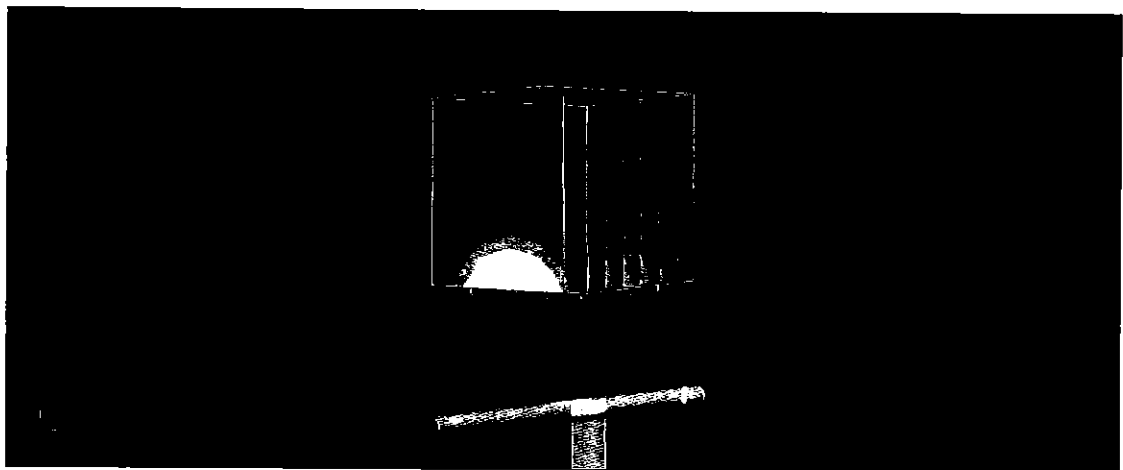


0 dB = 13.7 W/kg = 11.37 dBW/kg



# Impedance Measurement Plot for Body TSL

14 Jul 2016 13:08:43  
 CH1 S11 1 U FS 2: 46.404  $\Omega$  -466.80 m $\Omega$  194.83 pF 1 750.000 000 MHz


\*  
 Del  
 CA

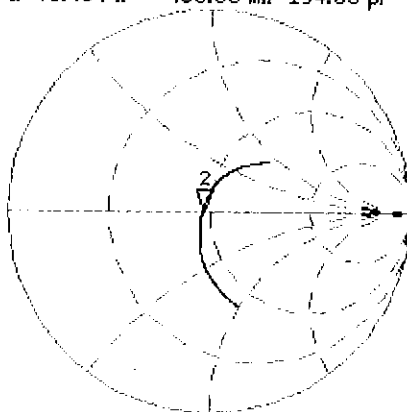

Avg  
 16  
 H1d

CH2 S11 LOG 5 dB/REF -20 dB 2:-28.487 dB 1 750.000 000 MHz

CA  
 Avg  
 16  
 H1d

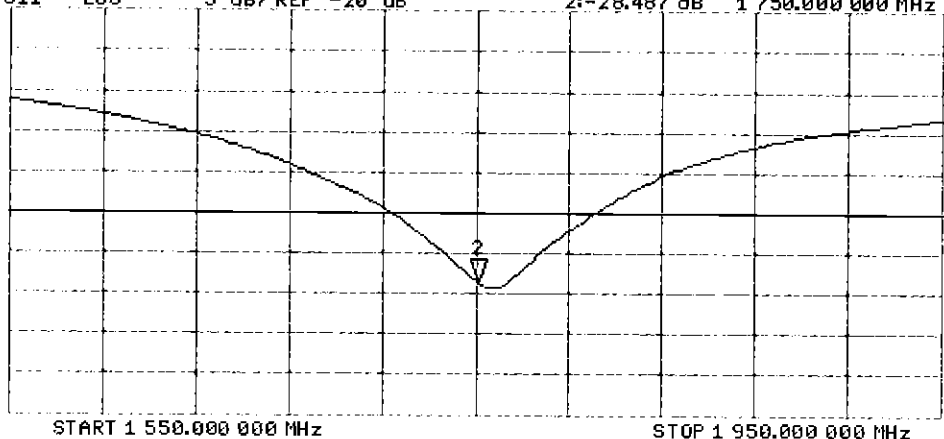

# Certification of Calibration

Object D1750V2 – SN: 1150

Calibration procedure(s) Procedure for Calibration Extension for SAR Dipoles.

Calibration date: July 07, 2017

Description: SAR Validation Dipole at 1750 MHz.

## Calibration Equipment used:

| Manufacturer          | Model     | Description                                             | Cal Date   | Cal Interval | Cal Due    | Serial Number |
|-----------------------|-----------|---------------------------------------------------------|------------|--------------|------------|---------------|
| Control Company       | 4040      | Therm./Clock/Humidity Monitor                           | 3/31/2017  | Biennial     | 3/31/2019  | 170232394     |
| Control Company       | 4352      | Ultra Long Stem Thermometer                             | 5/2/2017   | Biennial     | 5/2/2019   | 170330156     |
| Amplifier Research    | 1551G6    | Amplifier                                               | CBT        | N/A          | CBT        | 433971        |
| Narda                 | 4772-3    | Attenuator (3dB)                                        | CBT        | N/A          | CBT        | 9406          |
| Keysight Technologies | 85033E    | Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm) | 6/1/2017   | Annual       | 6/1/2018   | MY53401181    |
| Agilent               | 8753ES    | S-Parameter Network Analyzer                            | 10/26/2016 | Annual       | 10/26/2017 | US39170118    |
| Mini-Circuits         | BW-N20W5+ | DC to 18 GHz Precision Fixed 20 dB Attenuator           | CBT        | N/A          | CBT        | N/A           |
| SPEAG                 | DAE4      | Dasy Data Acquisition Electronics                       | 3/8/2017   | Annual       | 3/8/2018   | 1368          |
| SPEAG                 | DAE4      | Dasy Data Acquisition Electronics                       | 3/13/2017  | Annual       | 3/13/2018  | 1415          |
| SPEAG                 | DAK-3.5   | Dielectric Assessment Kit                               | 5/10/2017  | Annual       | 5/10/2018  | 1070          |
| SPEAG                 | ES3DV3    | SAR Probe                                               | 3/14/2017  | Annual       | 3/14/2018  | 3209          |
| SPEAG                 | ES3DV3    | SAR Probe                                               | 3/14/2017  | Annual       | 3/14/2018  | 3319          |
| Anritsu               | MA2411B   | Pulse Power Sensor                                      | 2/10/2017  | Annual       | 2/10/2018  | 1207364       |
| Anritsu               | MA2411B   | Pulse Power Sensor                                      | 2/10/2017  | Annual       | 2/10/2018  | 1339018       |
| Anritsu               | ML2495A   | Power Meter                                             | 10/16/2015 | Biennial     | 10/16/2017 | 941001        |
| Agilent               | N5182A    | MXG Vector Signal Generator                             | 2/28/2017  | Annual       | 2/28/2018  | MY47420800    |
| Seekonk               | NC-100    | Torque Wrench                                           | 11/6/2015  | Biennial     | 11/6/2017  | N/A           |
| Mini-Circuits         | NLP-2950+ | Low Pass Filter DC to 2700 MHz                          | CBT        | N/A          | CBT        | N/A           |
| Pasternack            | PE2209-10 | Bidirectional Coupler                                   | CBT        | N/A          | CBT        | N/A           |

Measurement Uncertainty =  $\pm 23\%$  (k=2)

|                | Name             | Function                 | Signature               |
|----------------|------------------|--------------------------|-------------------------|
| Calibrated By: | Brodie Halfoster | Test Engineer            | <i>BRODIE HALFOSTER</i> |
| Approved By:   | Kaitlin O'Keefe  | Senior Technical Manager | <i>KOK</i>              |

# DIPOLE CALIBRATION EXTENSION



Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:

1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.


The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:

| Calibration Date | Extension Date | Certificate Electrical Delay (ns) | Certificate SAR Target Head (1g) W/kg @ 20.0 dBm | Measured Head SAR (1g) W/kg @ 20.0 dBm | Deviation 1g (%) | Certificate SAR Target Head (10g) W/kg @ 20.0 dBm | Measured Head SAR (10g) W/kg @ 20.0 dBm | Deviation 10g (%) | Certificate Impedance Head (Ohm) Real | Measured Impedance Head (Ohm) Real | Difference (Ohm) Real | Certificate Impedance Head (Ohm) Imaginary | Measured Impedance Head (Ohm) Imaginary | Difference (Ohm) Imaginary | Certificate Return Loss Head (dB) | Measured Return Loss Head (dB) | Deviation (%) | PASS/FAIL |
|------------------|----------------|-----------------------------------|--------------------------------------------------|----------------------------------------|------------------|---------------------------------------------------|-----------------------------------------|-------------------|---------------------------------------|------------------------------------|-----------------------|--------------------------------------------|-----------------------------------------|----------------------------|-----------------------------------|--------------------------------|---------------|-----------|
| 7/14/2016        | 7/7/2017       | 1.218                             | 3.61                                             | 3.57                                   | -1.11%           | 1.92                                              | 1.88                                    | -2.08%            | 50.9                                  | 49.9                               | 1                     | 0.4                                        | -1.8                                    | 2.1                        | -40.2                             | -33.4                          | 16.90%        | PASS      |
| Calibration Date | Extension Date | Certificate Electrical Delay (ns) | Certificate SAR Target Body (1g) W/kg @ 20.0 dBm | Measured Body SAR (1g) W/kg @ 20.0 dBm | Deviation 1g (%) | Certificate SAR Target Body (10g) W/kg @ 20.0 dBm | Measured Body SAR (10g) W/kg @ 20.0 dBm | Deviation 10g (%) | Certificate Impedance Body (Ohm) Real | Measured Impedance Body (Ohm) Real | Difference (Ohm) Real | Certificate Impedance Body (Ohm) Imaginary | Measured Impedance Body (Ohm) Imaginary | Difference (Ohm) Imaginary | Certificate Return Loss Body (dB) | Measured Return Loss Body (dB) | Deviation (%) | PASS/FAIL |
| 7/14/2016        | 7/7/2017       | 1.218                             | 3.65                                             | 3.68                                   | 0.82%            | 1.95                                              | 1.97                                    | 1.03%             | 46.4                                  | 45.5                               | 0.9                   | -0.5                                       | 0.7                                     | 1.2                        | -28.5                             | -23.6                          | 17.20%        | PASS      |

Impedance & Return-Loss Measurement Plot for Head TSL

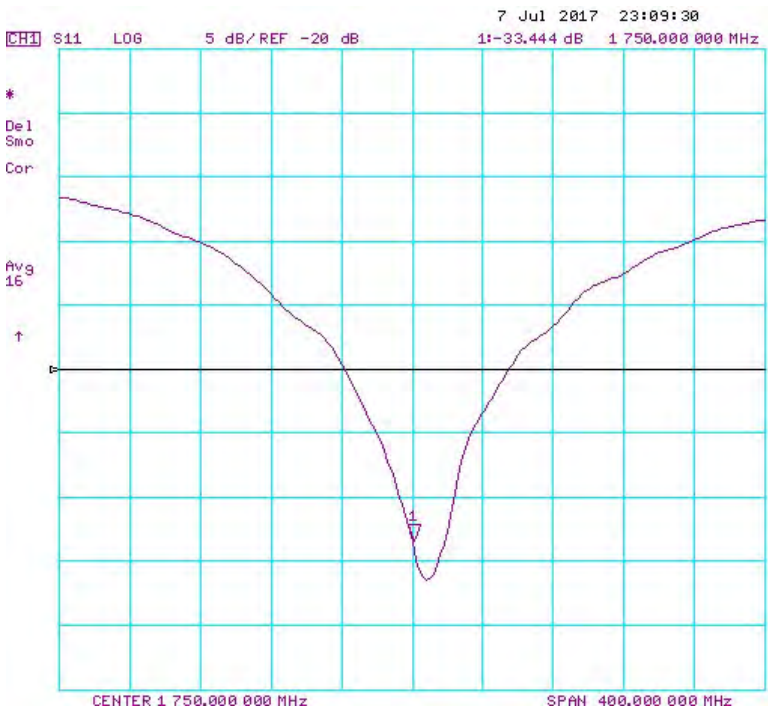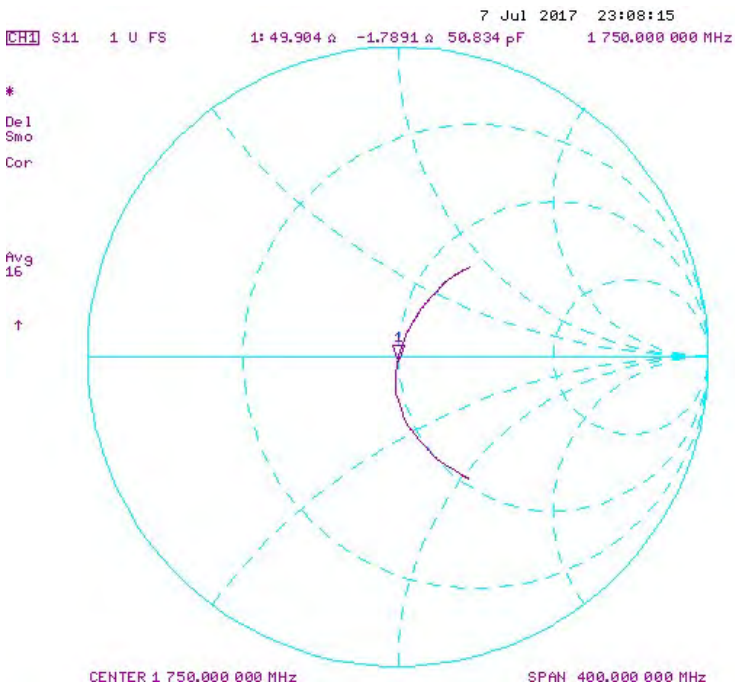

Impedance & Return-Loss Measurement Plot for Body TSL

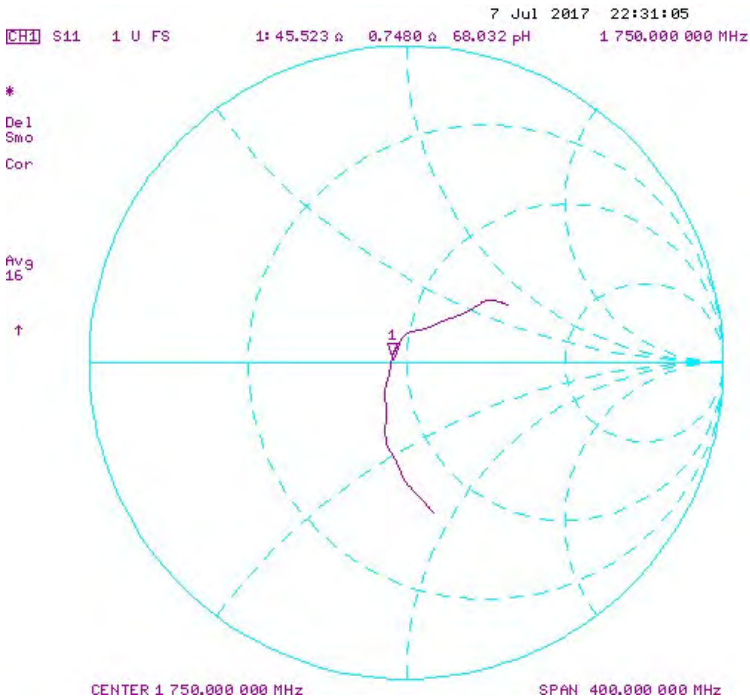



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D1900V2-5d148\_Feb18**

## CALIBRATION CERTIFICATE

Object **D1900V2 - SN:5d148**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

*BN ✓*  
*03-02-2018*

Calibration date: **February 07, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)      | Scheduled Calibration |
|-----------------------------|--------------------|---------------------------------|-----------------------|
| Power meter NRP             | SN: 104778         | 04-Apr-17 (No. 217-02521/02522) | Apr-18                |
| Power sensor NRP-Z91        | SN: 103244         | 04-Apr-17 (No. 217-02521)       | Apr-18                |
| Power sensor NRP-Z91        | SN: 103245         | 04-Apr-17 (No. 217-02522)       | Apr-18                |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 07-Apr-17 (No. 217-02528)       | Apr-18                |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 07-Apr-17 (No. 217-02529)       | Apr-18                |
| Reference Probe EX3DV4      | SN: 7349           | 30-Dec-17 (No. EX3-7349_Dec17)  | Dec-18                |
| DAE4                        | SN: 601            | 26-Oct-17 (No. DAE4-601_Oct17)  | Oct-18                |

| Secondary Standards       | ID #           | Check Date (in house)             | Scheduled Check        |
|---------------------------|----------------|-----------------------------------|------------------------|
| Power meter EPM-442A      | SN: GB37480704 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A     | SN: US37292783 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A     | SN: MY41092317 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| RF generator R&S SMT-06   | SN: 100972     | 15-Jun-15 (in house check Oct-16) | In house check: Oct-18 |
| Network Analyzer HP 8753E | SN: US37390585 | 18-Oct-01 (in house check Oct-17) | In house check: Oct-18 |

Calibrated by: **Claudio Leubler** **Laboratory Technician**

Signature

Approved by: **Katja Pokovic** **Technical Manager**

Issued: February 7, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary:

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                                     |                        |             |
|-------------------------------------|------------------------|-------------|
| <b>DASY Version</b>                 | DASY5                  | V52.10.0    |
| <b>Extrapolation</b>                | Advanced Extrapolation |             |
| <b>Phantom</b>                      | Modular Flat Phantom   |             |
| <b>Distance Dipole Center - TSL</b> | 10 mm                  | with Spacer |
| <b>Zoom Scan Resolution</b>         | dx, dy, dz = 5 mm      |             |
| <b>Frequency</b>                    | 1900 MHz $\pm$ 1 MHz   |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                                | Temperature         | Permittivity   | Conductivity         |
|------------------------------------------------|---------------------|----------------|----------------------|
| <b>Nominal Head TSL parameters</b>             | 22.0 °C             | 40.0           | 1.40 mho/m           |
| <b>Measured Head TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 40.7 $\pm$ 6 % | 1.39 mho/m $\pm$ 6 % |
| <b>Head TSL temperature change during test</b> | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL

|                                                             |                    |                                                |
|-------------------------------------------------------------|--------------------|------------------------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b> | Condition          |                                                |
| SAR measured                                                | 250 mW input power | 9.95 W/kg                                      |
| SAR for nominal Head TSL parameters                         | normalized to 1W   | <b>40.1 W/kg <math>\pm</math> 17.0 % (k=2)</b> |

|                                                               |                    |                                                |
|---------------------------------------------------------------|--------------------|------------------------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | condition          |                                                |
| SAR measured                                                  | 250 mW input power | 5.22 W/kg                                      |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>21.0 W/kg <math>\pm</math> 16.5 % (k=2)</b> |

## Body TSL parameters

The following parameters and calculations were applied.

|                                                | Temperature         | Permittivity   | Conductivity         |
|------------------------------------------------|---------------------|----------------|----------------------|
| <b>Nominal Body TSL parameters</b>             | 22.0 °C             | 53.3           | 1.52 mho/m           |
| <b>Measured Body TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 55.2 $\pm$ 6 % | 1.48 mho/m $\pm$ 6 % |
| <b>Body TSL temperature change during test</b> | < 0.5 °C            | ----           | ----                 |

## SAR result with Body TSL

|                                                             |                    |                                                |
|-------------------------------------------------------------|--------------------|------------------------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b> | Condition          |                                                |
| SAR measured                                                | 250 mW input power | 9.68 W/kg                                      |
| SAR for nominal Body TSL parameters                         | normalized to 1W   | <b>39.6 W/kg <math>\pm</math> 17.0 % (k=2)</b> |

|                                                               |                    |                                                |
|---------------------------------------------------------------|--------------------|------------------------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b> | condition          |                                                |
| SAR measured                                                  | 250 mW input power | 5.14 W/kg                                      |
| SAR for nominal Body TSL parameters                           | normalized to 1W   | <b>20.9 W/kg <math>\pm</math> 16.5 % (k=2)</b> |



## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 52.1 $\Omega$ + 5.8 j $\Omega$ |
| Return Loss                          | - 24.3 dB                      |

### Antenna Parameters with Body TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 47.8 $\Omega$ + 6.5 j $\Omega$ |
| Return Loss                          | - 23.1 dB                      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.199 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |                |
|-----------------|----------------|
| Manufactured by | SPEAG          |
| Manufactured on | March 11, 2011 |

## DASY5 Validation Report for Head TSL

Date: 07.02.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d148**

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.39$  S/m;  $\epsilon_r = 40.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.18, 8.18, 8.18); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

### **Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 109.6 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 18.5 W/kg

**SAR(1 g) = 9.95 W/kg; SAR(10 g) = 5.22 W/kg**


Maximum value of SAR (measured) = 15.3 W/kg

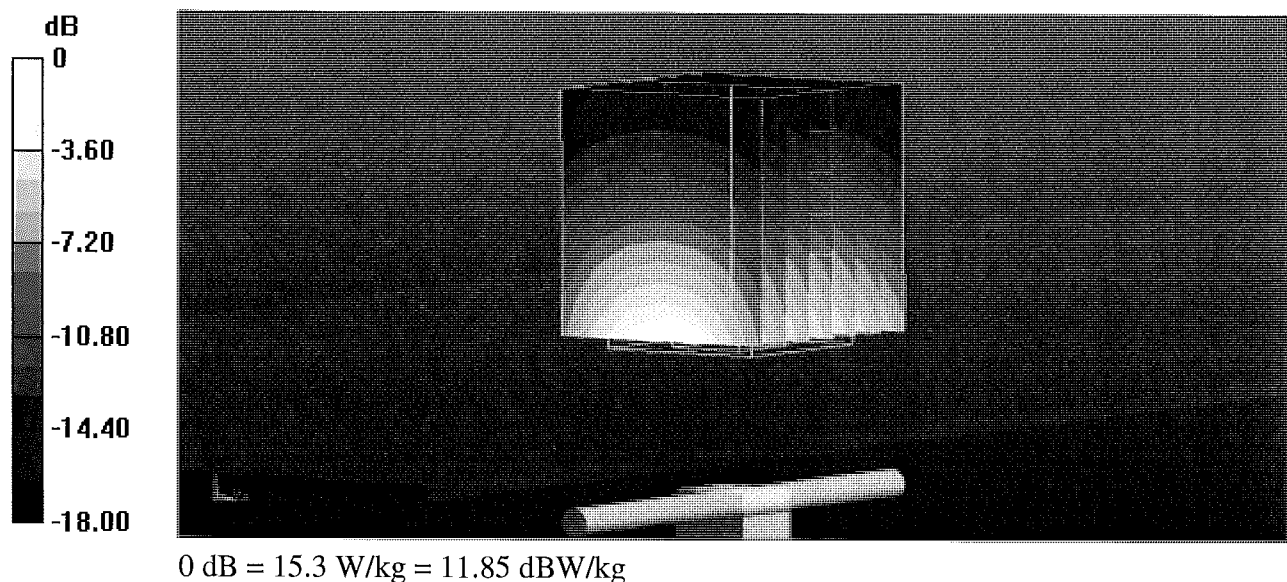

Impedance Measurement Plot for Head TSL

7 Feb 2018 15:15:06  
CH1 S11 1 U FS 1: 52.148  $\angle$  5.8281  $\angle$  488.20  $\mu$ H 1 900.000 000 MHz


\*  
Del  
CA

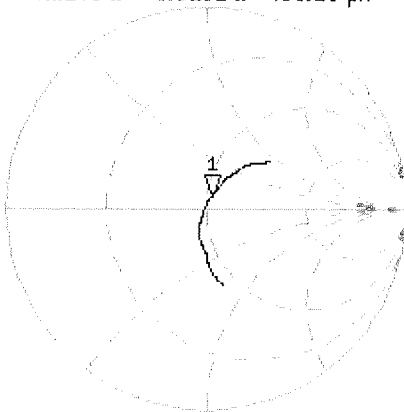

Avg  
16  
H1d

CH2 S11 LOG 5 dB/ REF -20 dB 1:-24.331 dB 1 900.000 000 MHz

CA  
Avg  
16  
H1d

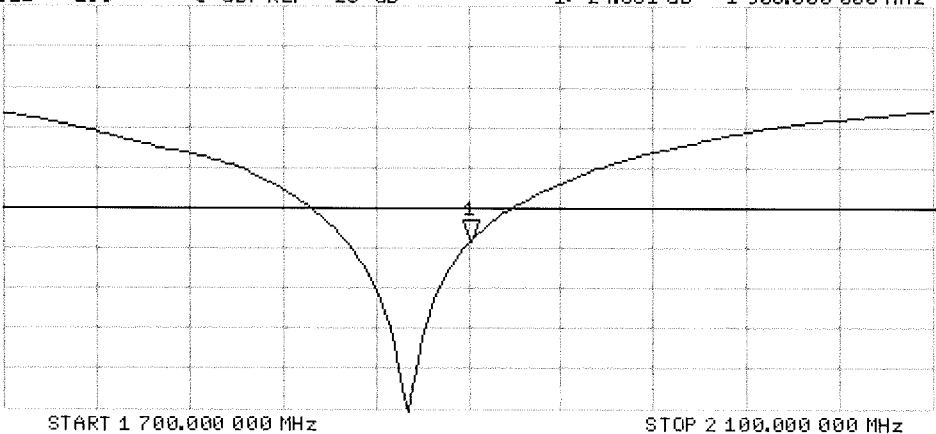

## DASY5 Validation Report for Body TSL

Date: 07.02.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d148**

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.48$  S/m;  $\epsilon_r = 55.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.15, 8.15, 8.15); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 103.0 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 17.2 W/kg

**SAR(1 g) = 9.68 W/kg; SAR(10 g) = 5.14 W/kg**

Maximum value of SAR (measured) = 14.4 W/kg

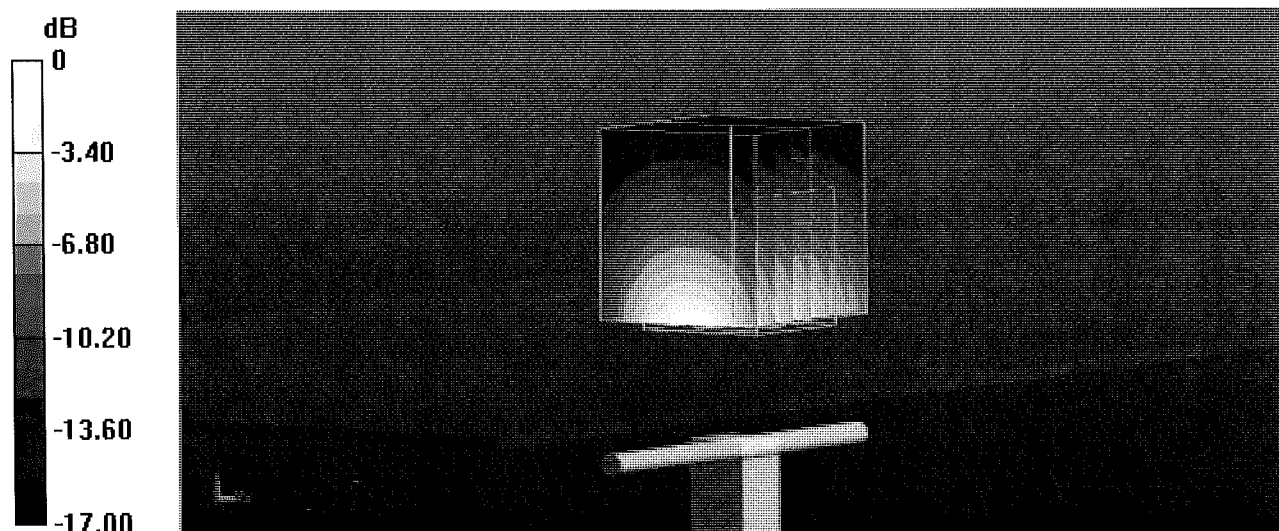


0 dB = 14.4 W/kg = 11.58 dBW/kg

Impedance Measurement Plot for Body TSL


7 Feb 2018 15:14:31  
[CH1] S11 1 U FS 1: 47.787  $\Omega$  6.4551  $\Omega$  540.71  $\mu$ H 1 900.000 000 MHz

\*  
Del  
CA  
Avg  
16  
H1d

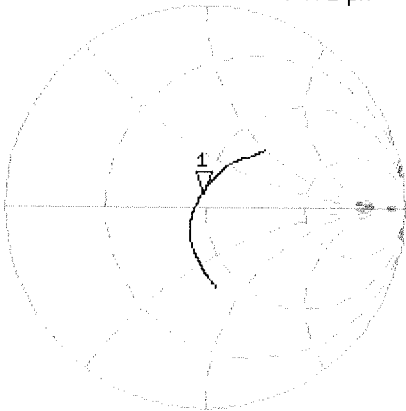

CH2 S11 LOG 5 dB/REF -20 dB 1:-23.146 dB 1 900.000 000 MHz

CA  
Avg  
16  
H1d

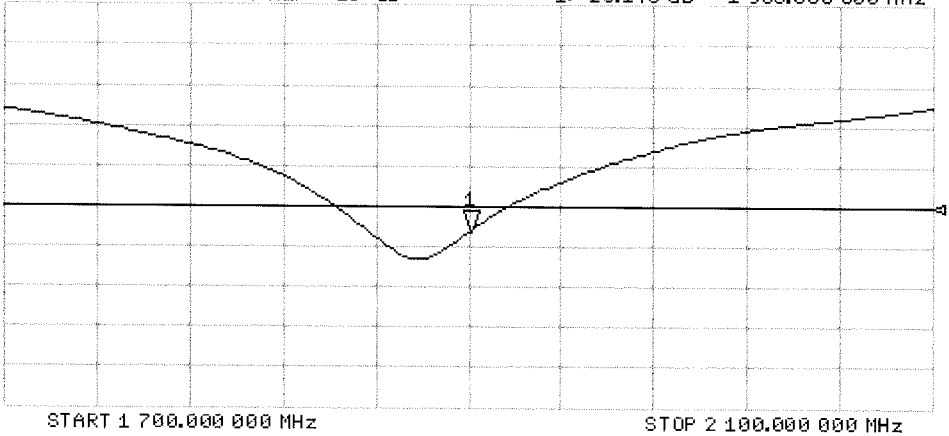



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D2450V2-981\_Jul16**

## CALIBRATION CERTIFICATE

Object **D2450V2 - SN:981**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **July 25, 2016**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)      | Scheduled Calibration |
|-----------------------------|--------------------|---------------------------------|-----------------------|
| Power meter NRP             | SN: 104778         | 06-Apr-16 (No. 217-02288/02289) | Apr-17                |
| Power sensor NRP-Z91        | SN: 103244         | 06-Apr-16 (No. 217-02288)       | Apr-17                |
| Power sensor NRP-Z91        | SN: 103245         | 06-Apr-16 (No. 217-02289)       | Apr-17                |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 05-Apr-16 (No. 217-02292)       | Apr-17                |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 05-Apr-16 (No. 217-02295)       | Apr-17                |
| Reference Probe EX3DV4      | SN: 7349           | 15-Jun-16 (No. EX3-7349_Jun16)  | Jun-17                |
| DAE4                        | SN: 601            | 30-Dec-15 (No. DAE4-601_Dec15)  | Dec-16                |

| Secondary Standards       | ID #           | Check Date (in house)             | Scheduled Check        |
|---------------------------|----------------|-----------------------------------|------------------------|
| Power meter EPM-442A      | SN: GB37480704 | 07-Oct-15 (No. 217-02222)         | In house check: Oct-16 |
| Power sensor HP 8481A     | SN: US37292783 | 07-Oct-15 (No. 217-02222)         | In house check: Oct-16 |
| Power sensor HP 8481A     | SN: MY41092317 | 07-Oct-15 (No. 217-02223)         | In house check: Oct-16 |
| RF generator R&S SMT-06   | SN: 100972     | 15-Jun-15 (in house check Jun-15) | In house check: Oct-16 |
| Network Analyzer HP 8753E | SN: US37390585 | 18-Oct-01 (in house check Oct-15) | In house check: Oct-16 |

Calibrated by: **Michael Weber** **Laboratory Technician**

Signature

*M. Weber*

Approved by: **Katja Pokovic** **Technical Manager**

*Katja Pokovic*

Issued: July 27, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

✓ PTH  
8/9/16  
Extended  
7/20/17  
SCV ✓



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

**Glossary:**

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- e) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                        |             |
|------------------------------|------------------------|-------------|
| DASY Version                 | DASY5                  | V52.8.8     |
| Extrapolation                | Advanced Extrapolation |             |
| Phantom                      | Modular Flat Phantom   |             |
| Distance Dipole Center - TSL | 10 mm                  | with Spacer |
| Zoom Scan Resolution         | dx, dy, dz = 5 mm      |             |
| Frequency                    | 2450 MHz $\pm$ 1 MHz   |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 39.2           | 1.80 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 38.0 $\pm$ 6 % | 1.86 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 13.5 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 52.8 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 6.26 W/kg                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 24.7 W/kg $\pm$ 16.5 % (k=2) |

## Body TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Body TSL parameters             | 22.0 °C             | 52.7           | 1.95 mho/m           |
| Measured Body TSL parameters            | (22.0 $\pm$ 0.2) °C | 51.8 $\pm$ 6 % | 2.03 mho/m $\pm$ 6 % |
| Body TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Body TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 13.0 W/kg                    |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 50.8 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 6.04 W/kg                    |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 23.8 W/kg $\pm$ 16.5 % (k=2) |



## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $53.2 \Omega + 3.4 j\Omega$ |
| Return Loss                          | - 26.9 dB                   |

### Antenna Parameters with Body TSL

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $50.2 \Omega + 4.5 j\Omega$ |
| Return Loss                          | - 27.0 dB                   |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.162 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |                   |
|-----------------|-------------------|
| Manufactured by | SPEAG             |
| Manufactured on | December 30, 2014 |

## DASY5 Validation Report for Head TSL

Date: 13.07.2016

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:981**

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.86$  S/m;  $\epsilon_r = 38$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.72, 7.72, 7.72); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

**Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 115.8 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 27.4 W/kg

**SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.26 W/kg**

Maximum value of SAR (measured) = 22.5 W/kg

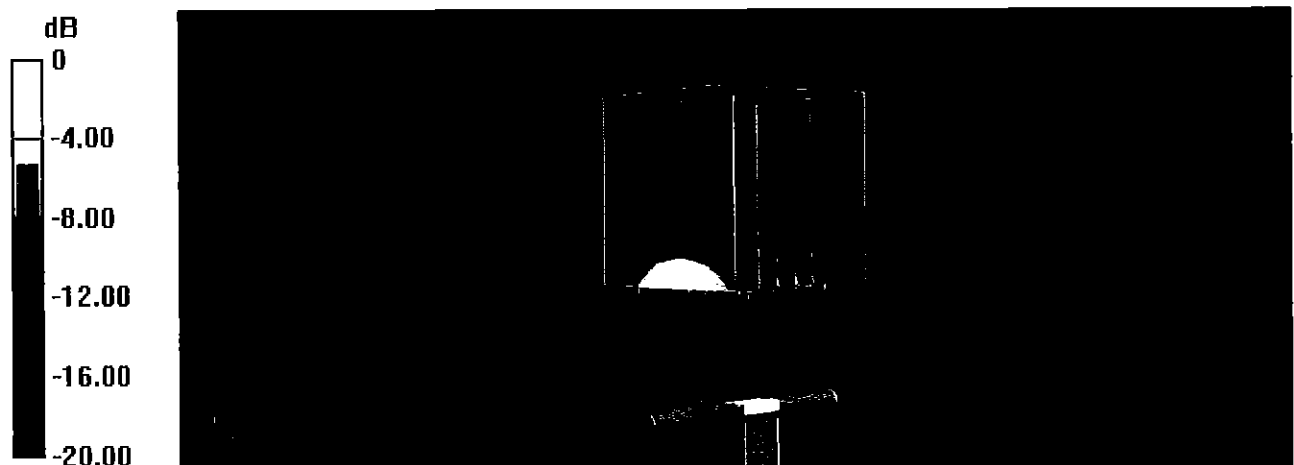


0 dB = 22.5 W/kg = 13.52 dBW/kg

# Impedance Measurement Plot for Head TSL

13 Jul 2016 12:53:29  
 CH1 S11 1 U FS 3: 53.234  $\Omega$  3.3633  $\Omega$  218.48  $\mu\text{H}$  2 450.000 000 MHz

\*  
 De l  
 CA

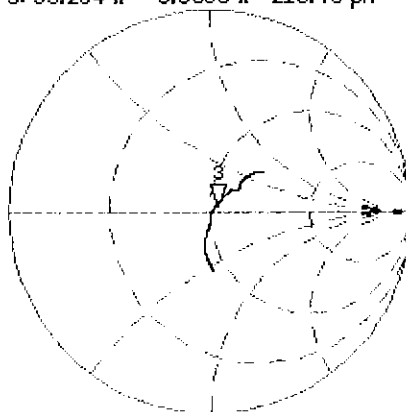

AVG  
 16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 3:-26.900 dB 2 450.000 000 MHz

CA

AVG  
 16

H1d

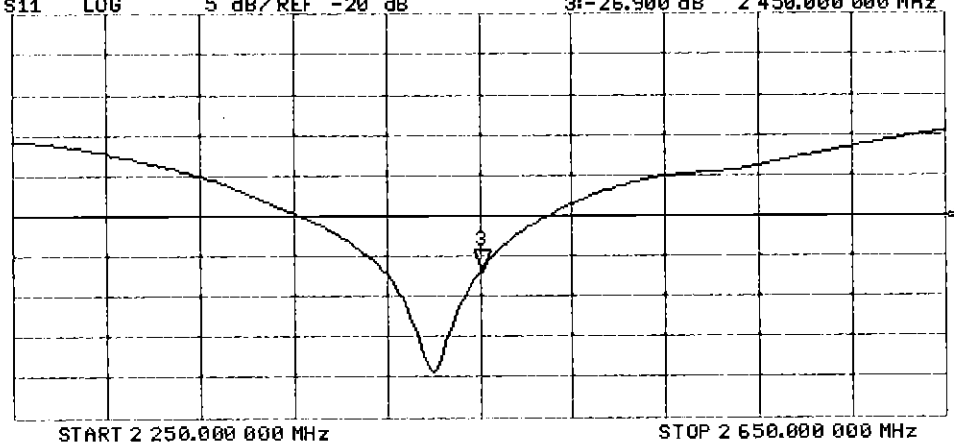

## DASY5 Validation Report for Body TSL

Date: 25.07.2016

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:981**

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2.03$  S/m;  $\epsilon_r = 51.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.79, 7.79, 7.79); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

### **Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 107.1 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 26.0 W/kg

**SAR(1 g) = 13 W/kg; SAR(10 g) = 6.04 W/kg**

Maximum value of SAR (measured) = 21.4 W/kg




0 dB = 21.4 W/kg = 13.30 dBW/kg

# Impedance Measurement Plot for Body TSL

25 Jul 2016 10:03:11  
 CH1 S11 1 U FS 1: 50.184  $\Omega$  4.4980  $\Omega$  292.20 pH 2 450.000 000 MHz

\*  
 De1  
 CA

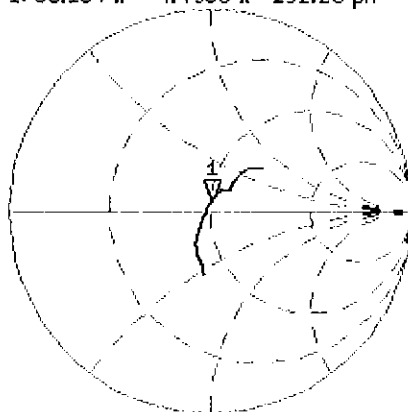


Avg  
 16  
 H1 d

CH2 S11 LOG 5 dB/ REF -20 dB 1: -26.957 dB 2 450.000 000 MHz

CA

H1 d

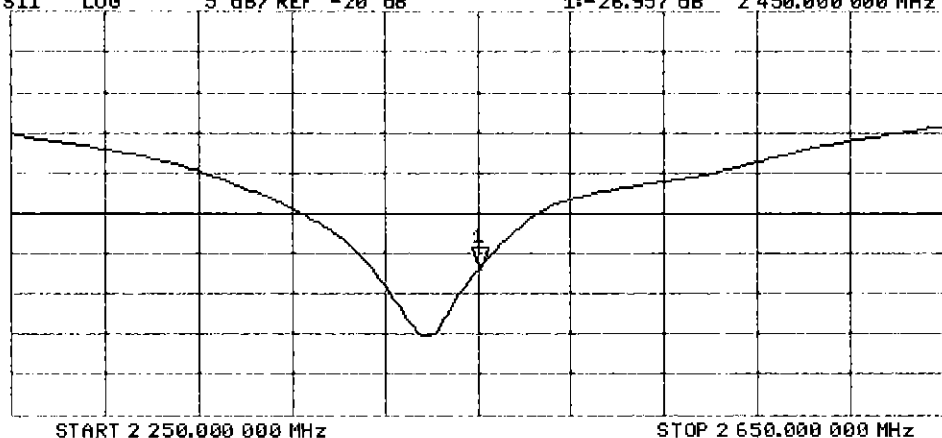

# Certification of Calibration

Object D2450V2 – SN: 981

Calibration procedure(s) Procedure for Calibration Extension for SAR Dipoles.

Calibration date: July 24, 2017

Description: SAR Validation Dipole at 2450 MHz.

## Calibration Equipment used:

| Manufacturer          | Model     | Description                                             | Cal Date   | Cal Interval | Cal Due    | Serial Number |
|-----------------------|-----------|---------------------------------------------------------|------------|--------------|------------|---------------|
| Control Company       | 4040      | Therm./Clock/Humidity Monitor                           | 3/31/2017  | Biennial     | 3/31/2019  | 170232394     |
| Control Company       | 4352      | Ultra Long Stem Thermometer                             | 5/2/2017   | Biennial     | 5/2/2019   | 170330156     |
| Amplifier Research    | 1551G6    | Amplifier                                               | CBT        | N/A          | CBT        | 433971        |
| Narda                 | 4772-3    | Attenuator (3dB)                                        | CBT        | N/A          | CBT        | 9406          |
| Keysight              | 772D      | Dual Directional Coupler                                | CBT        | N/A          | CBT        | MY52180215    |
| Keysight Technologies | 85033E    | Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm) | 6/1/2017   | Annual       | 6/1/2018   | MY53401181    |
| Agilent               | 8753ES    | S-Parameter Network Analyzer                            | 10/26/2016 | Annual       | 10/26/2017 | US39170118    |
| Mini-Circuits         | BW-N20W5+ | DC to 18 GHz Precision Fixed 20 dB Attenuator           | CBT        | N/A          | CBT        | N/A           |
| SPEAG                 | DAE4      | Dasy Data Acquisition Electronics                       | 9/14/2016  | Annual       | 9/14/2017  | 1408          |
| SPEAG                 | DAE4      | Dasy Data Acquisition Electronics                       | 2/9/2017   | Annual       | 2/9/2018   | 1272          |
| SPEAG                 | DAK-3.5   | Dielectric Assessment Kit                               | 5/10/2017  | Annual       | 5/10/2018  | 1070          |
| SPEAG                 | ES3DV3    | SAR Probe                                               | 9/19/2016  | Annual       | 9/19/2017  | 3287          |
| SPEAG                 | ES3DV3    | SAR Probe                                               | 2/10/2017  | Annual       | 2/10/2018  | 3213          |
| Anritsu               | MA2411B   | Pulse Power Sensor                                      | 2/10/2017  | Annual       | 2/10/2018  | 1207364       |
| Anritsu               | MA2411B   | Pulse Power Sensor                                      | 2/10/2017  | Annual       | 2/10/2018  | 1339018       |
| Anritsu               | ML2495A   | Power Meter                                             | 10/16/2015 | Biennial     | 10/16/2017 | 941001        |
| Agilent               | N5182A    | MXG Vector Signal Generator                             | 2/28/2017  | Annual       | 2/28/2018  | MY47420800    |
| Seekonk               | NC-100    | Torque Wrench                                           | 11/6/2015  | Biennial     | 11/6/2017  | N/A           |
| Mini-Circuits         | NLP-2950+ | Low Pass Filter DC to 2700 MHz                          | CBT        | N/A          | CBT        | N/A           |
| Pasternack            | PE2209-10 | Bidirectional Coupler                                   | CBT        | N/A          | CBT        | N/A           |

Measurement Uncertainty =  $\pm 23\%$  (k=2)

|                | Name             | Function                 | Signature               |
|----------------|------------------|--------------------------|-------------------------|
| Calibrated By: | Brodie Halfoster | Test Engineer            | <i>BRODIE HALFOSTER</i> |
| Approved By:   | Kaitlin O'Keefe  | Senior Technical Manager | <i>KOK</i>              |

# DIPOLE CALIBRATION EXTENSION



Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:

1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.

The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:


| Calibration Date | Extension Date | Certificate Electrical Delay (ns) | Certificate SAR Target Head (1g) W/kg @ 20.0 dBm | Measured Head SAR (1g) W/kg @ 20.0 dBm | Deviation 1g (%) | Certificate SAR Target Head (10g) W/kg @ 20.0 dBm | Measured Head SAR (10g) W/kg @ 20.0 dBm | Deviation 10g (%) | Certificate Impedance Head (Ohm) Real | Measured Impedance Head (Ohm) Real | Difference (Ohm) Real | Certificate Impedance Head (Ohm) Imaginary | Measured Impedance Head (Ohm) Imaginary | Difference (Ohm) Imaginary | Certificate Return Loss Head (dB) | Measured Return Loss Head (dB) | Deviation (%) | PASS/FAIL |
|------------------|----------------|-----------------------------------|--------------------------------------------------|----------------------------------------|------------------|---------------------------------------------------|-----------------------------------------|-------------------|---------------------------------------|------------------------------------|-----------------------|--------------------------------------------|-----------------------------------------|----------------------------|-----------------------------------|--------------------------------|---------------|-----------|
| 7/25/2016        | 7/24/2017      | 1.162                             | 5.28                                             | 5.57                                   | 5.49%            | 2.47                                              | 2.56                                    | 3.64%             | 53.2                                  | 53.5                               | 0.3                   | 3.4                                        | 1.1                                     | 2.3                        | -26.9                             | -27.6                          | -2.60%        | PASS      |
| Calibration Date | Extension Date | Certificate Electrical Delay (ns) | Certificate SAR Target Body (1g) W/kg @ 20.0 dBm | Measured Body SAR (1g) W/kg @ 20.0 dBm | Deviation 1g (%) | Certificate SAR Target Body (10g) W/kg @ 20.0 dBm | Measured Body SAR (10g) W/kg @ 20.0 dBm | Deviation 10g (%) | Certificate Impedance Body (Ohm) Real | Measured Impedance Body (Ohm) Real | Difference (Ohm) Real | Certificate Impedance Body (Ohm) Imaginary | Measured Impedance Body (Ohm) Imaginary | Difference (Ohm) Imaginary | Certificate Return Loss Body (dB) | Measured Return Loss Body (dB) | Deviation (%) | PASS/FAIL |
| 7/25/2016        | 7/24/2017      | 1.162                             | 5.08                                             | 5.34                                   | 5.12%            | 2.38                                              | 2.39                                    | 0.42%             | 50.2                                  | 47.7                               | 2.5                   | 4.5                                        | 3.4                                     | 1.1                        | -27.0                             | -27.6                          | -2.20%        | PASS      |

Impedance & Return-Loss Measurement Plot for Head TSL

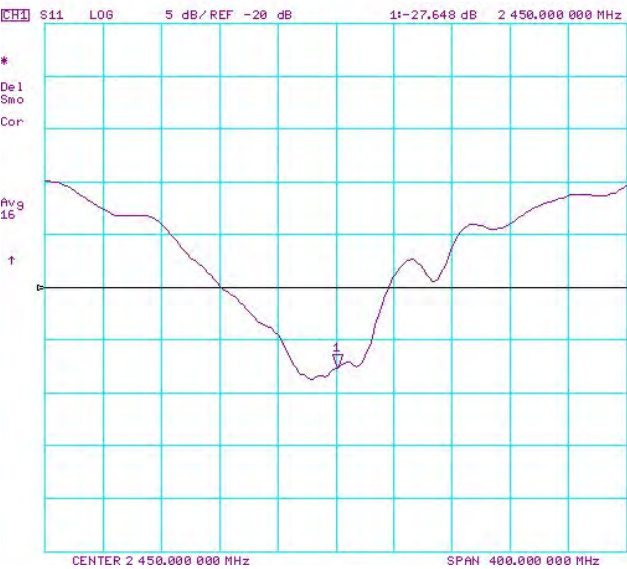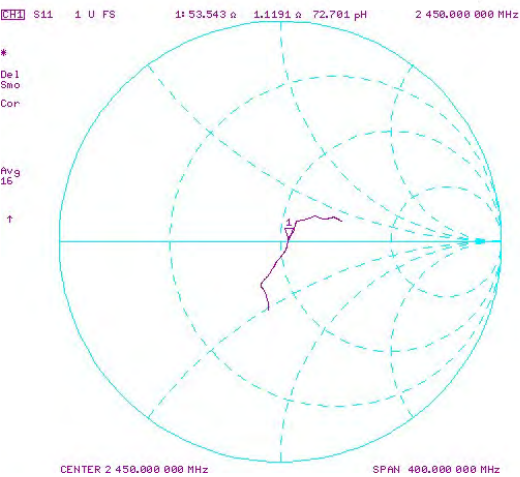



Impedance & Return-Loss Measurement Plot for Body TSL

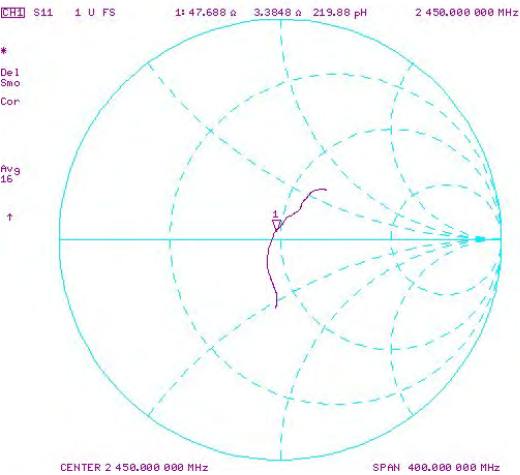



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D2450V2-882\_Feb18**

## CALIBRATION CERTIFICATE

Object **D2450V2 - SN:882**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

BN ✓  
 03-02-2018

Calibration date: **February 07, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter NRP             | SN: 104778         | 04-Apr-17 (No. 217-02521/02522)   | Apr-18                 |
| Power sensor NRP-Z91        | SN: 103244         | 04-Apr-17 (No. 217-02521)         | Apr-18                 |
| Power sensor NRP-Z91        | SN: 103245         | 04-Apr-17 (No. 217-02522)         | Apr-18                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 07-Apr-17 (No. 217-02528)         | Apr-18                 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 07-Apr-17 (No. 217-02529)         | Apr-18                 |
| Reference Probe EX3DV4      | SN: 7349           | 30-Dec-17 (No. EX3-7349_Dec17)    | Dec-18                 |
| DAE4                        | SN: 601            | 26-Oct-17 (No. DAE4-601_Oct17)    | Oct-18                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| Power meter EPM-442A        | SN: GB37480704     | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A       | SN: US37292783     | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A       | SN: MY41092317     | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| RF generator R&S SMT-06     | SN: 100972         | 15-Jun-15 (in house check Oct-16) | In house check: Oct-18 |
| Network Analyzer HP 8753E   | SN: US37390585     | 18-Oct-01 (in house check Oct-17) | In house check: Oct-18 |

Calibrated by: **Claudio Leubler** **Laboratory Technician**

Signature

Approved by: **Katja Pokovic** **Technical Manager**

Signature

Issued: February 7, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary:

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                                     |                        |             |
|-------------------------------------|------------------------|-------------|
| <b>DASY Version</b>                 | DASY5                  | V52.10.0    |
| <b>Extrapolation</b>                | Advanced Extrapolation |             |
| <b>Phantom</b>                      | Modular Flat Phantom   |             |
| <b>Distance Dipole Center - TSL</b> | 10 mm                  | with Spacer |
| <b>Zoom Scan Resolution</b>         | dx, dy, dz = 5 mm      |             |
| <b>Frequency</b>                    | 2450 MHz $\pm$ 1 MHz   |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                                | Temperature         | Permittivity   | Conductivity         |
|------------------------------------------------|---------------------|----------------|----------------------|
| <b>Nominal Head TSL parameters</b>             | 22.0 °C             | 39.2           | 1.80 mho/m           |
| <b>Measured Head TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 37.9 $\pm$ 6 % | 1.87 mho/m $\pm$ 6 % |
| <b>Head TSL temperature change during test</b> | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL

|                                                             |                    |                                                |
|-------------------------------------------------------------|--------------------|------------------------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b> | Condition          |                                                |
| SAR measured                                                | 250 mW input power | 13.4 W/kg                                      |
| SAR for nominal Head TSL parameters                         | normalized to 1W   | <b>52.2 W/kg <math>\pm</math> 17.0 % (k=2)</b> |

|                                                               |                    |                                                |
|---------------------------------------------------------------|--------------------|------------------------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | condition          |                                                |
| SAR measured                                                  | 250 mW input power | 6.22 W/kg                                      |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>24.5 W/kg <math>\pm</math> 16.5 % (k=2)</b> |

## Body TSL parameters

The following parameters and calculations were applied.

|                                                | Temperature         | Permittivity   | Conductivity         |
|------------------------------------------------|---------------------|----------------|----------------------|
| <b>Nominal Body TSL parameters</b>             | 22.0 °C             | 52.7           | 1.95 mho/m           |
| <b>Measured Body TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 51.4 $\pm$ 6 % | 2.04 mho/m $\pm$ 6 % |
| <b>Body TSL temperature change during test</b> | < 0.5 °C            | ----           | ----                 |

## SAR result with Body TSL

|                                                             |                    |                                                |
|-------------------------------------------------------------|--------------------|------------------------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b> | Condition          |                                                |
| SAR measured                                                | 250 mW input power | 12.9 W/kg                                      |
| SAR for nominal Body TSL parameters                         | normalized to 1W   | <b>50.2 W/kg <math>\pm</math> 17.0 % (k=2)</b> |

|                                                               |                    |                                                |
|---------------------------------------------------------------|--------------------|------------------------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b> | condition          |                                                |
| SAR measured                                                  | 250 mW input power | 5.98 W/kg                                      |
| SAR for nominal Body TSL parameters                           | normalized to 1W   | <b>23.6 W/kg <math>\pm</math> 16.5 % (k=2)</b> |

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

|                                      |                               |
|--------------------------------------|-------------------------------|
| Impedance, transformed to feed point | $52.0\ \Omega + 1.3\ j\Omega$ |
| Return Loss                          | - 32.6 dB                     |

### Antenna Parameters with Body TSL

|                                      |                               |
|--------------------------------------|-------------------------------|
| Impedance, transformed to feed point | $48.8\ \Omega + 3.7\ j\Omega$ |
| Return Loss                          | - 28.1 dB                     |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.156 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |                  |
|-----------------|------------------|
| Manufactured by | SPEAG            |
| Manufactured on | October 06, 2011 |

## DASY5 Validation Report for Head TSL

Date: 07.02.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:882**

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.87$  S/m;  $\epsilon_r = 37.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.88, 7.88, 7.88); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

### **Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 112.2 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 27.1 W/kg

**SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.22 W/kg**

Maximum value of SAR (measured) = 21.6 W/kg

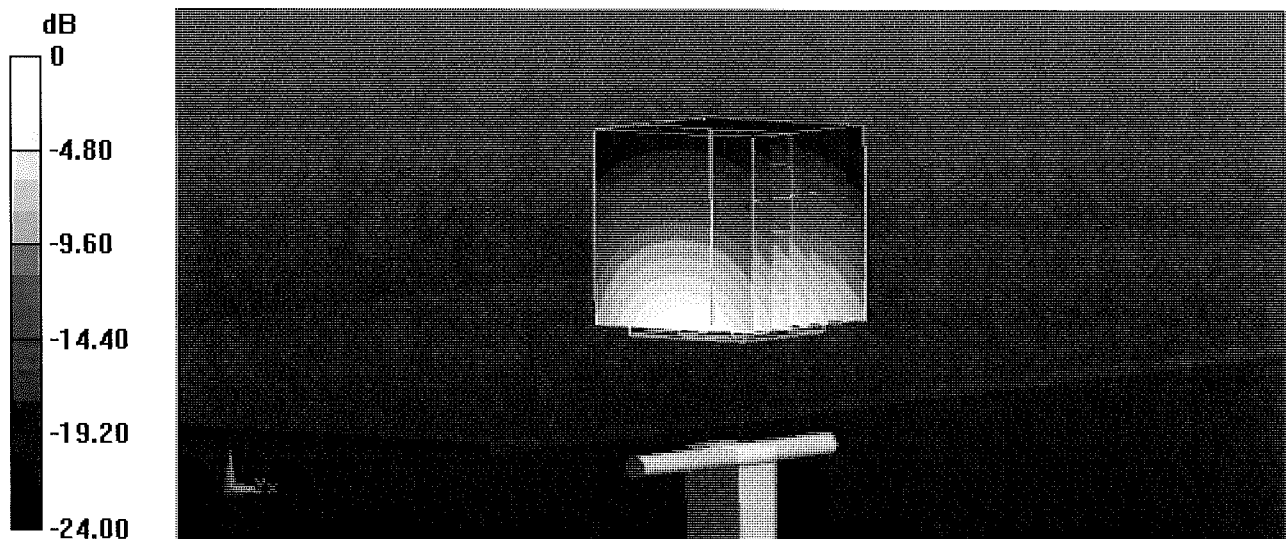


0 dB = 21.6 W/kg = 13.34 dBW/kg

## Impedance Measurement Plot for Head TSL

7 Feb 2018 15:38:37  
[CH1] S11 1 U FS 1: 52.023  $\Omega$  1.2734  $\Omega$  82.724  $\mu\text{H}$  2 450.000 000 MHz

\*  
Del  
CA

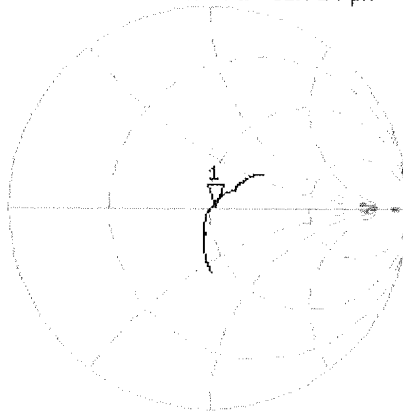

Avg  
16


H1d

CH2 S11 LOG 5 dB/ REF -20 dB 1: -32.606 dB 2 450.000 000 MHz

CA

Avg  
16

H1d

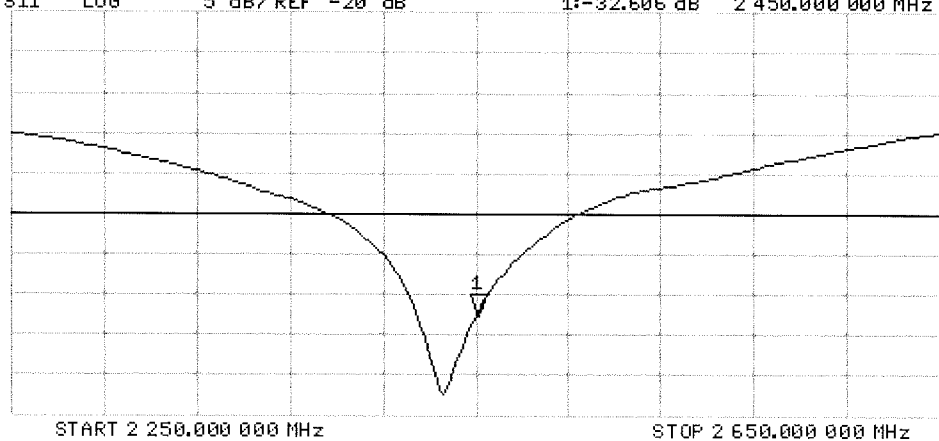

## DASY5 Validation Report for Body TSL

Date: 07.02.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:882**

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2.04$  S/m;  $\epsilon_r = 51.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.01, 8.01, 8.01); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

### **Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 107.8 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 25.9 W/kg

**SAR(1 g) = 12.9 W/kg; SAR(10 g) = 5.98 W/kg**


Maximum value of SAR (measured) = 21.2 W/kg

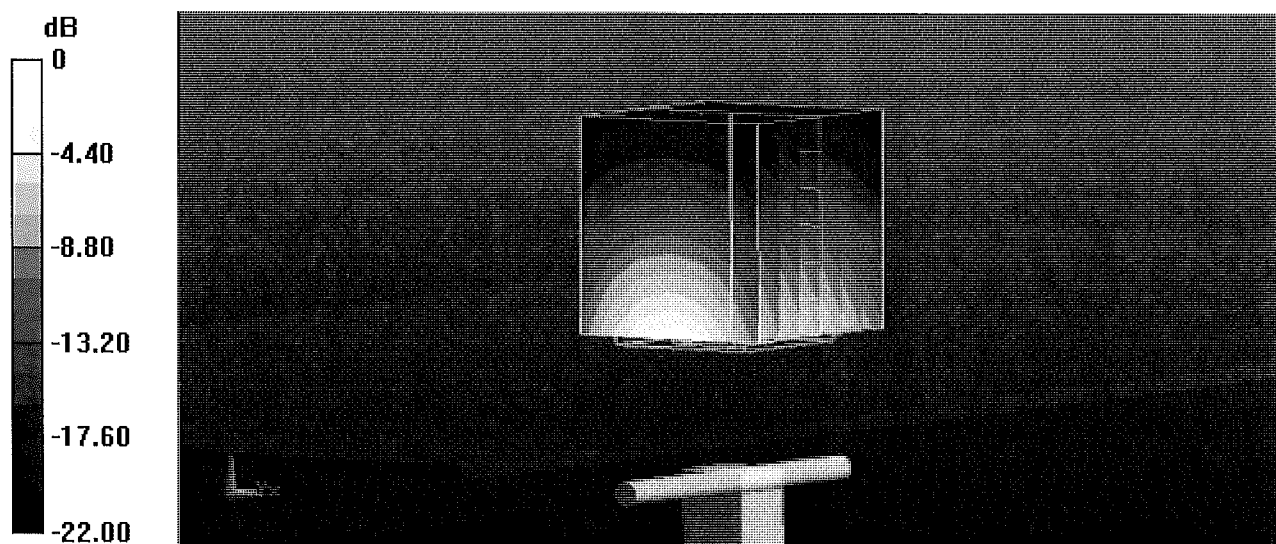

0 dB = 21.2 W/kg = 13.26 dBW/kg



Impedance Measurement Plot for Body TSL

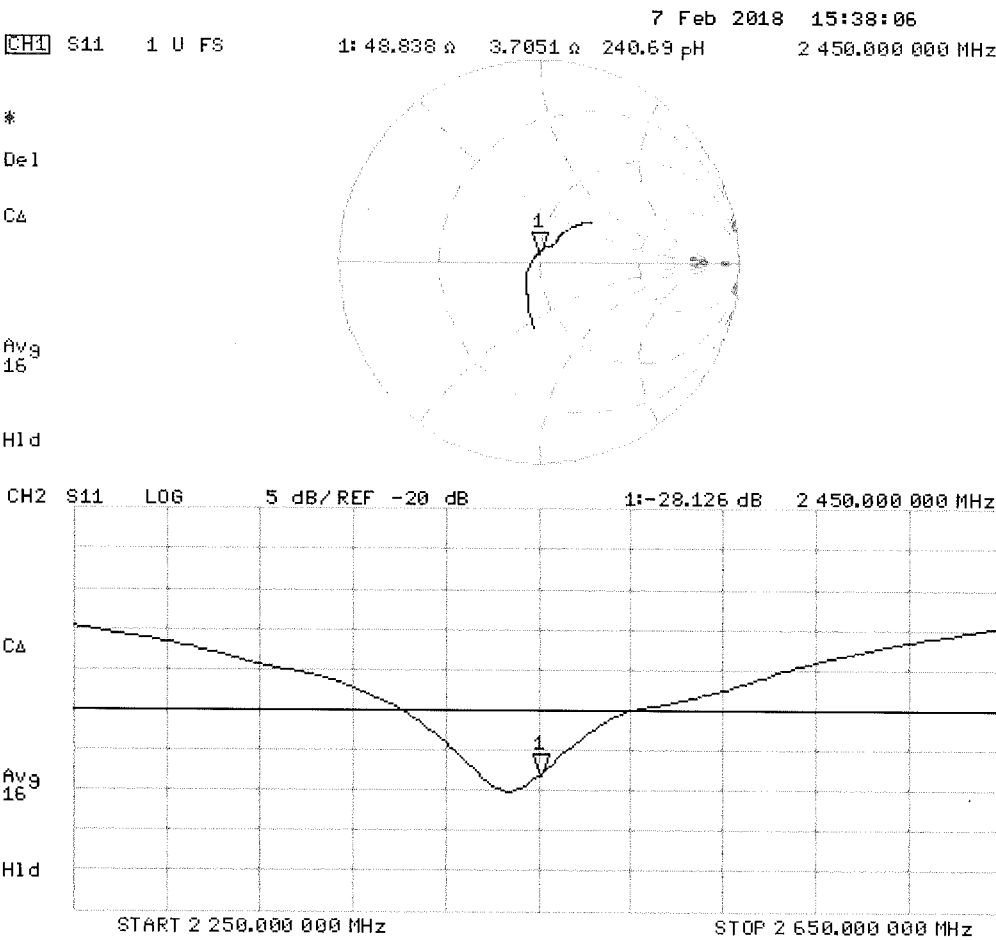



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D2600V2-1071\_Sep16**

## CALIBRATION CERTIFICATE

Object **D2600V2 - SN:1071**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

BN ✓  
 09-28-2016  
 Extended  
 9/2017  
 SC ✓

Calibration date: **September 13, 2016**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter NRP             | SN: 104778         | 06-Apr-16 (No. 217-02288/02289)   | Apr-17                 |
| Power sensor NRP-Z91        | SN: 103244         | 06-Apr-16 (No. 217-02288)         | Apr-17                 |
| Power sensor NRP-Z91        | SN: 103245         | 06-Apr-16 (No. 217-02289)         | Apr-17                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 05-Apr-16 (No. 217-02292)         | Apr-17                 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 05-Apr-16 (No. 217-02295)         | Apr-17                 |
| Reference Probe EX3DV4      | SN: 7349           | 15-Jun-16 (No. EX3-7349_Jun16)    | Jun-17                 |
| DAE4                        | SN: 601            | 30-Dec-15 (No. DAE4-601_Dec15)    | Dec-16                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| Power meter EPM-442A        | SN: GB37480704     | 07-Oct-15 (No. 217-02222)         | In house check: Oct-16 |
| Power sensor HP 8481A       | SN: US37292783     | 07-Oct-15 (No. 217-02222)         | In house check: Oct-16 |
| Power sensor HP 8481A       | SN: MY41092317     | 07-Oct-15 (No. 217-02223)         | In house check: Oct-16 |
| RF generator R&S SMT-06     | SN: 100972         | 15-Jun-15 (in house check Jun-15) | In house check: Oct-16 |
| Network Analyzer HP 8753E   | SN: US37390585     | 18-Oct-01 (in house check Oct-15) | In house check: Oct-16 |

Calibrated by: **Jeton Kastrati**      Name: **Jeton Kastrati**      Function: **Laboratory Technician**      Signature:

Approved by: **Katja Pokovic**      Name: **Katja Pokovic**      Technical Manager      Signature:

Issued: September 13, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

**Glossary:**

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                        |             |
|------------------------------|------------------------|-------------|
| DASY Version                 | DASY5                  | V52.8.8     |
| Extrapolation                | Advanced Extrapolation |             |
| Phantom                      | Modular Flat Phantom   |             |
| Distance Dipole Center - TSL | 10 mm                  | with Spacer |
| Zoom Scan Resolution         | dx, dy, dz = 5 mm      |             |
| Frequency                    | 2600 MHz $\pm$ 1 MHz   |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 39.0           | 1.96 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 37.3 $\pm$ 6 % | 2.05 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 14.5 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 56.3 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 6.45 W/kg                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 25.3 W/kg $\pm$ 16.5 % (k=2) |

## Body TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Body TSL parameters             | 22.0 °C             | 52.5           | 2.16 mho/m           |
| Measured Body TSL parameters            | (22.0 $\pm$ 0.2) °C | 51.1 $\pm$ 6 % | 2.22 mho/m $\pm$ 6 % |
| Body TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Body TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 13.8 W/kg                    |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 54.2 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 6.20 W/kg                    |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 24.5 W/kg $\pm$ 16.5 % (k=2) |

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 49.9 $\Omega$ - 6.7 j $\Omega$ |
| Return Loss                          | - 23.5 dB                      |

### Antenna Parameters with Body TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 46.1 $\Omega$ - 2.1 j $\Omega$ |
| Return Loss                          | - 26.7 dB                      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.153 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |               |
|-----------------|---------------|
| Manufactured by | SPEAG         |
| Manufactured on | July 17, 2013 |

## DASY5 Validation Report for Head TSL

Date: 13.09.2016

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN:1071**

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.05$  S/m;  $\epsilon_r = 37.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.56, 7.56, 7.56); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

### **Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 115.1 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 30.4 W/kg

**SAR(1 g) = 14.5 W/kg; SAR(10 g) = 6.45 W/kg**

Maximum value of SAR (measured) = 24.6 W/kg




0 dB = 24.6 W/kg = 13.91 dBW/kg

Impedance Measurement Plot for Head TSL

12 Sep 2016 13:13:44  
CH1 S11 1 U FS 4: 43.902  $\Omega$  -6.6523  $\Omega$  9.2018 pF 2 600.000 000 MHz


\*  
De l  
CA

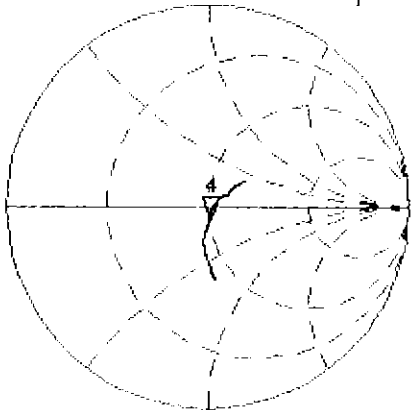

Avg  
16  
H1 d

CH2 S11 LOG 5 dB/ REF -20 dB 4:-23.548 dB 2 600.000 000 MHz

CA  
Avg  
16  
H1 d

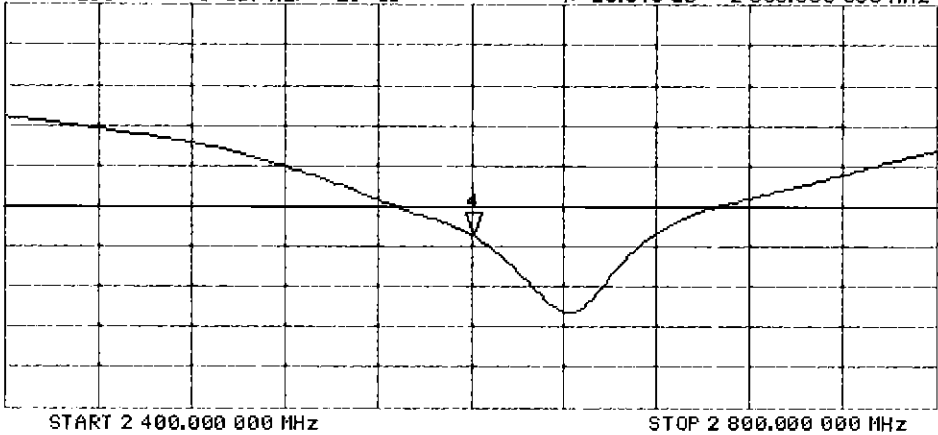

## DASY5 Validation Report for Body TSL

Date: 13.09.2016

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN:1071**

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.22$  S/m;  $\epsilon_r = 51.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.48, 7.48, 7.48); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

### **Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 107.7 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 28.3 W/kg

**SAR(1 g) = 13.8 W/kg; SAR(10 g) = 6.2 W/kg**

Maximum value of SAR (measured) = 23.3 W/kg




0 dB = 23.3 W/kg = 13.67 dBW/kg



## Impedance Measurement Plot for Body TSL

12 Sep 2016 13:13:09  
[CH1] S11 1 U FS 4: 46.078  $\Omega$  -2.0762  $\Omega$  29.484 pF 2 600.000 000 MHz

\*  
De I  
Ca

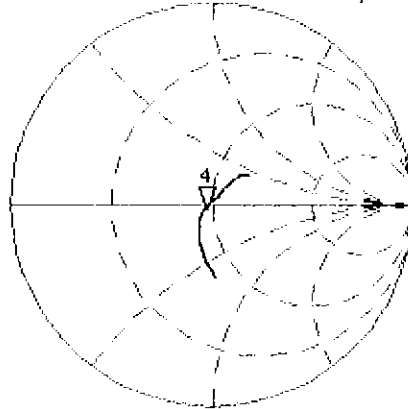

Avg  
16


H1 d

CH2 S11 LOG 5 dB/REF -20 dB 4:-26.721 dB 2 600.000 000 MHz

Ca

Avg  
16

H1 d

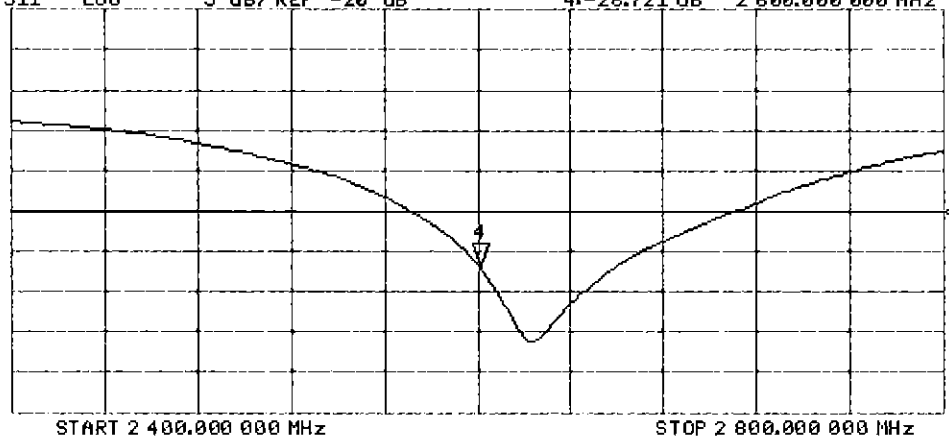

# Certification of Calibration

Object D2600V2 – SN: 1071

Calibration procedure(s) Procedure for Calibration Extension for SAR Dipoles.

Calibration date: 09/07/2017

Description: SAR Validation Dipole at 2600 MHz.

## Calibration Equipment used:

| Manufacturer          | Model     | Description                                             | Cal Date   | Cal Interval | Cal Due    | Serial Number |
|-----------------------|-----------|---------------------------------------------------------|------------|--------------|------------|---------------|
| Control Company       | 4040      | Therm./Clock/Humidity Monitor                           | 3/31/2017  | Biennial     | 3/31/2019  | 170232394     |
| Control Company       | 4352      | Ultra Long Stem Thermometer                             | 5/2/2017   | Biennial     | 5/2/2019   | 170330156     |
| Amplifier Research    | 1551G6    | Amplifier                                               | CBT        | N/A          | CBT        | 433971        |
| Narda                 | 4772-3    | Attenuator (3dB)                                        | CBT        | N/A          | CBT        | 9406          |
| Keysight              | 772D      | Dual Directional Coupler                                | CBT        | N/A          | CBT        | MY52180215    |
| Keysight Technologies | 85033E    | Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm) | 6/1/2017   | Annual       | 6/1/2018   | MY53401181    |
| Agilent               | 8753ES    | S-Parameter Network Analyzer                            | 10/26/2016 | Annual       | 10/26/2017 | US39170118    |
| Mini-Circuits         | BW-N20W5+ | DC to 18 GHz Precision Fixed 20 dB Attenuator           | CBT        | N/A          | CBT        | N/A           |
| SPEAG                 | DAE4      | Dasy Data Acquisition Electronics                       | 7/13/2017  | Annual       | 7/13/2018  | 1322          |
| SPEAG                 | DAK-3.5   | Dielectric Assessment Kit                               | 5/10/2017  | Annual       | 5/10/2018  | 1070          |
| SPEAG                 | EX3DV4    | SAR Probe                                               | 7/17/2017  | Annual       | 7/17/2018  | 7410          |
| Anritsu               | MA2411B   | Pulse Power Sensor                                      | 2/10/2017  | Annual       | 2/10/2018  | 1207364       |
| Anritsu               | MA2411B   | Pulse Power Sensor                                      | 2/10/2017  | Annual       | 2/10/2018  | 1339018       |
| Anritsu               | ML2495A   | Power Meter                                             | 10/16/2015 | Biennial     | 10/16/2017 | 941001        |
| Agilent               | N5182A    | MXG Vector Signal Generator                             | 2/28/2017  | Annual       | 2/28/2018  | MY47420800    |
| Seekonk               | NC-100    | Torque Wrench                                           | 11/6/2015  | Biennial     | 11/6/2017  | N/A           |
| Mini-Circuits         | NLP-2950+ | Low Pass Filter DC to 2700 MHz                          | CBT        | N/A          | CBT        | N/A           |

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path.

Measurement Uncertainty =  $\pm 23\%$  ( $k=2$ )

|                | Name             | Function                 | Signature               |
|----------------|------------------|--------------------------|-------------------------|
| Calibrated By: | Brodie Halfoster | Test Engineer            | <i>BRODIE HALFOSTER</i> |
| Approved By:   | Kaitlin O'Keefe  | Senior Technical Manager | <i>KOK</i>              |

# DIPOLE CALIBRATION EXTENSION


Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:

1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.


The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:

| Calibration Date | Extension Date | Certificate Electrical Delay (ns) | Certificate SAR Target Head (1g) W/kg @ 20.0 dBm | Measured Head SAR (1g) W/kg @ 20.0 dBm | Deviation 1g (%) | Certificate SAR Target Head (10g) W/kg @ 20.0 dBm | Measured Head SAR (10g) W/kg @ 20.0 dBm | Deviation 10g (%) | Certificate Impedance Head (Ohm) Real | Measured Impedance Head (Ohm) Real | Difference (Ohm) Real | Certificate Impedance Head (Ohm) Imaginary | Measured Impedance Head (Ohm) Imaginary | Difference (Ohm) Imaginary | Certificate Return Loss Head (dB) | Measured Return Loss Head (dB) | Deviation (%) | PASS/FAIL |
|------------------|----------------|-----------------------------------|--------------------------------------------------|----------------------------------------|------------------|---------------------------------------------------|-----------------------------------------|-------------------|---------------------------------------|------------------------------------|-----------------------|--------------------------------------------|-----------------------------------------|----------------------------|-----------------------------------|--------------------------------|---------------|-----------|
| 9/13/2016        | 9/7/2017       | 1.153                             | 5.63                                             | 5.73                                   | 1.78%            | 2.53                                              | 2.52                                    | -0.40%            | 49.9                                  | 50.3                               | 0.4                   | -6.7                                       | -5.7                                    | 1.0                        | -23.5                             | -24.0                          | -2.10%        | PASS      |
| Calibration Date | Extension Date | Certificate Electrical Delay (ns) | Certificate SAR Target Body (1g) W/kg @ 20.0 dBm | Measured Body SAR (1g) W/kg @ 20.0 dBm | Deviation 1g (%) | Certificate SAR Target Body (10g) W/kg @ 20.0 dBm | Measured Body SAR (10g) W/kg @ 20.0 dBm | Deviation 10g (%) | Certificate Impedance Body (Ohm) Real | Measured Impedance Body (Ohm) Real | Difference (Ohm) Real | Certificate Impedance Body (Ohm) Imaginary | Measured Impedance Body (Ohm) Imaginary | Difference (Ohm) Imaginary | Certificate Return Loss Body (dB) | Measured Return Loss Body (dB) | Deviation (%) | PASS/FAIL |
| 9/13/2016        | 9/7/2017       | 1.153                             | 5.42                                             | 5.34                                   | -1.48%           | 2.45                                              | 2.33                                    | -4.90%            | 46.1                                  | 47.9                               | 1.8                   | -2.1                                       | -5.3                                    | 3.2                        | -26.7                             | -25.0                          | 6.40%         | PASS      |

Impedance & Return-Loss Measurement Plot for Head TSL

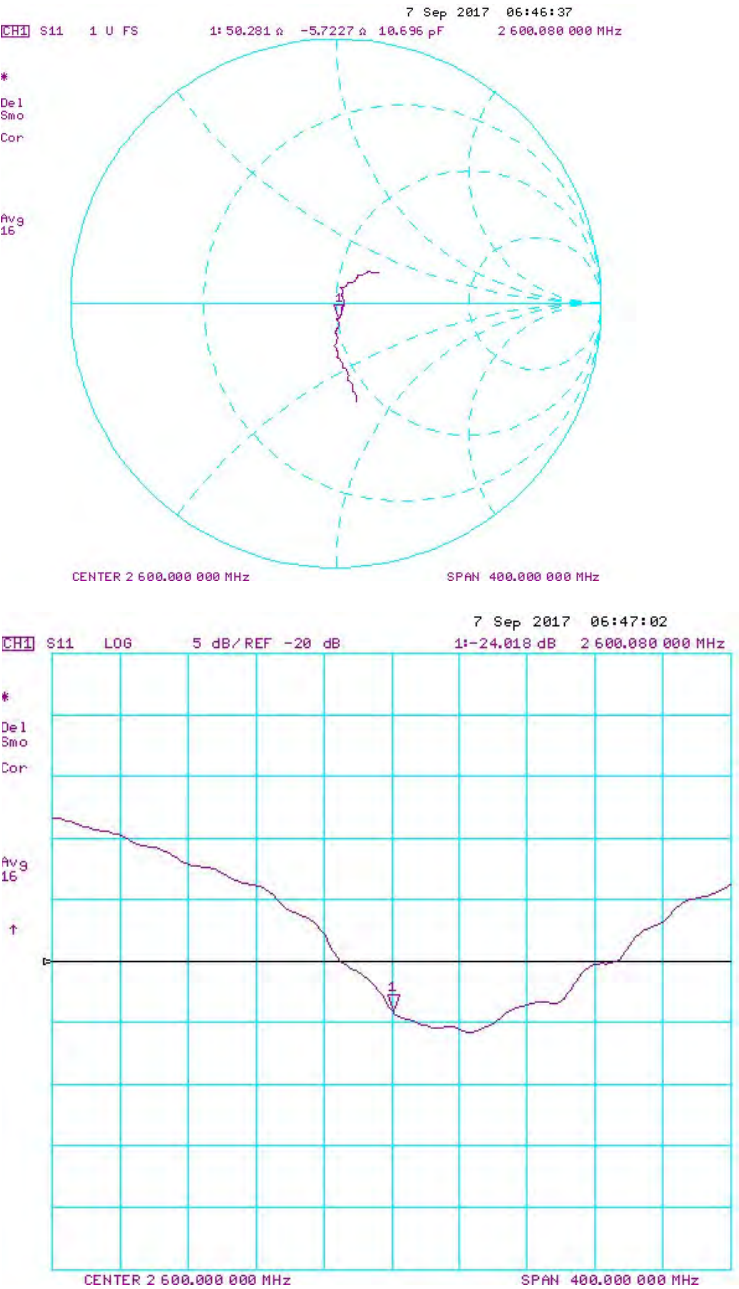

Impedance & Return-Loss Measurement Plot for Body TSL

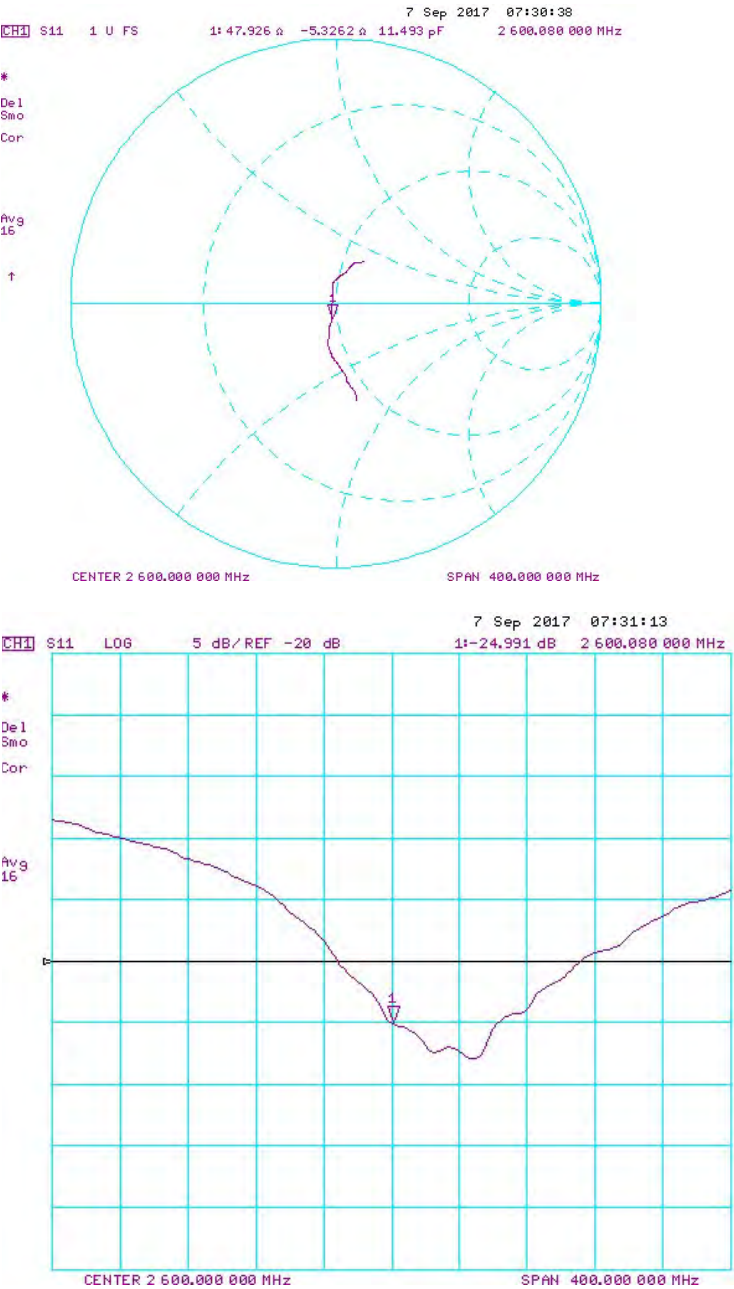



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D2600V2-1004\_Apr18**

## CALIBRATION CERTIFICATE

Object **D2600V2 - SN:1004**

Calibration procedure(s) **QA CAL-05.v10**  
**Calibration procedure for dipole validation kits above 700 MHz**

BN ✓  
 05-01-2018

Calibration date: **April 11, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^{\circ}\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)      | Scheduled Calibration |
|-----------------------------|--------------------|---------------------------------|-----------------------|
| Power meter NRP             | SN: 104778         | 04-Apr-18 (No. 217-02672/02673) | Apr-19                |
| Power sensor NRP-Z91        | SN: 103244         | 04-Apr-18 (No. 217-02672)       | Apr-19                |
| Power sensor NRP-Z91        | SN: 103245         | 04-Apr-18 (No. 217-02673)       | Apr-19                |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 04-Apr-18 (No. 217-02682)       | Apr-19                |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 04-Apr-18 (No. 217-02683)       | Apr-19                |
| Reference Probe EX3DV4      | SN: 7349           | 30-Dec-17 (No. EX3-7349_Dec17)  | Dec-18                |
| DAE4                        | SN: 601            | 26-Oct-17 (No. DAE4-601_Oct17)  | Oct-18                |

| Secondary Standards       | ID #           | Check Date (in house)             | Scheduled Check        |
|---------------------------|----------------|-----------------------------------|------------------------|
| Power meter EPM-442A      | SN: GB37480704 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A     | SN: US37292783 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A     | SN: MY41092317 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| RF generator R&S SMT-06   | SN: 100972     | 15-Jun-15 (in house check Oct-16) | In house check: Oct-18 |
| Network Analyzer HP 8753E | SN: US37390585 | 18-Oct-01 (in house check Oct-17) | In house check: Oct-18 |

Calibrated by: **Michael Weber** **Laboratory Technician**

Signature

*M. Weber*

Approved by: **Katja Pokovic** **Technical Manager**

*K. Pokovic*

Issued: April 12, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary:

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                                     |                        |             |
|-------------------------------------|------------------------|-------------|
| <b>DASY Version</b>                 | DASY5                  | V52.10.0    |
| <b>Extrapolation</b>                | Advanced Extrapolation |             |
| <b>Phantom</b>                      | Modular Flat Phantom   |             |
| <b>Distance Dipole Center - TSL</b> | 10 mm                  | with Spacer |
| <b>Zoom Scan Resolution</b>         | dx, dy, dz = 5 mm      |             |
| <b>Frequency</b>                    | 2600 MHz $\pm$ 1 MHz   |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                                | <b>Temperature</b>  | <b>Permittivity</b> | <b>Conductivity</b>  |
|------------------------------------------------|---------------------|---------------------|----------------------|
| <b>Nominal Head TSL parameters</b>             | 22.0 °C             | 39.0                | 1.96 mho/m           |
| <b>Measured Head TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 37.8 $\pm$ 6 %      | 2.03 mho/m $\pm$ 6 % |
| <b>Head TSL temperature change during test</b> | < 0.5 °C            | ----                | ----                 |

## SAR result with Head TSL

|                                                             |                    |                                                |
|-------------------------------------------------------------|--------------------|------------------------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b> | Condition          |                                                |
| SAR measured                                                | 250 mW input power | 14.3 W/kg                                      |
| SAR for nominal Head TSL parameters                         | normalized to 1W   | <b>55.9 W/kg <math>\pm</math> 17.0 % (k=2)</b> |

|                                                               |                    |                                                |
|---------------------------------------------------------------|--------------------|------------------------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | condition          |                                                |
| SAR measured                                                  | 250 mW input power | 6.35 W/kg                                      |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>25.1 W/kg <math>\pm</math> 16.5 % (k=2)</b> |

## Body TSL parameters

The following parameters and calculations were applied.

|                                                | <b>Temperature</b>  | <b>Permittivity</b> | <b>Conductivity</b>  |
|------------------------------------------------|---------------------|---------------------|----------------------|
| <b>Nominal Body TSL parameters</b>             | 22.0 °C             | 52.5                | 2.16 mho/m           |
| <b>Measured Body TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 52.1 $\pm$ 6 %      | 2.19 mho/m $\pm$ 6 % |
| <b>Body TSL temperature change during test</b> | < 0.5 °C            | ----                | ----                 |

## SAR result with Body TSL

|                                                             |                    |                                                |
|-------------------------------------------------------------|--------------------|------------------------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b> | Condition          |                                                |
| SAR measured                                                | 250 mW input power | 13.8 W/kg                                      |
| SAR for nominal Body TSL parameters                         | normalized to 1W   | <b>54.8 W/kg <math>\pm</math> 17.0 % (k=2)</b> |

|                                                               |                    |                                                |
|---------------------------------------------------------------|--------------------|------------------------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b> | condition          |                                                |
| SAR measured                                                  | 250 mW input power | 6.20 W/kg                                      |
| SAR for nominal Body TSL parameters                           | normalized to 1W   | <b>24.7 W/kg <math>\pm</math> 16.5 % (k=2)</b> |



## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 47.7 $\Omega$ - 5.7 j $\Omega$ |
| Return Loss                          | - 24.1 dB                      |

### Antenna Parameters with Body TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 46.0 $\Omega$ - 3.8 j $\Omega$ |
| Return Loss                          | - 24.9 dB                      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.149 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |                   |
|-----------------|-------------------|
| Manufactured by | SPEAG             |
| Manufactured on | December 23, 2006 |

## DASY5 Validation Report for Head TSL

Date: 11.04.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN: 1004**

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.03$  S/m;  $\epsilon_r = 37.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.7, 7.7, 7.7); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

### **Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 118.5 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 28.6 W/kg

**SAR(1 g) = 14.3 W/kg; SAR(10 g) = 6.35 W/kg**

Maximum value of SAR (measured) = 23.9 W/kg

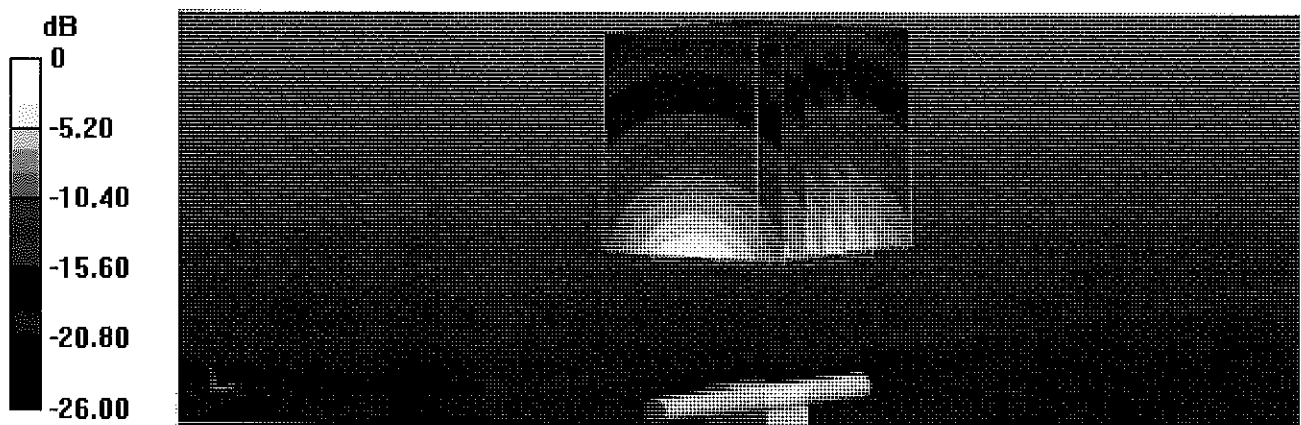

0 dB = 23.9 W/kg = 13.78 dBW/kg

# Impedance Measurement Plot for Head TSL

11 Apr 2018 11:25:16  
 [CH1] S11 1 U FS 1: 47.721  $\Omega$  -5.6836  $\Omega$  10.770 pF 2 500.000 000 MHz


\*

De1

CA

Avg  
16

H1d

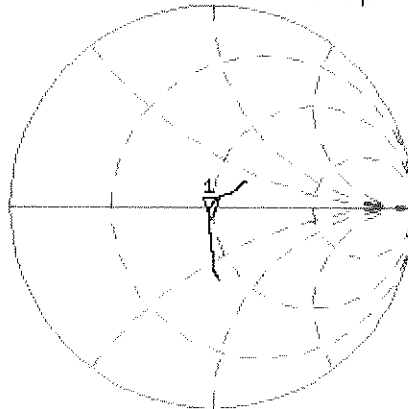


CH2 S11 LOG 5 dB/REF -20 dB 1:-24.073 dB 2 500.000 000 MHz

CA

Avg  
16

H1d

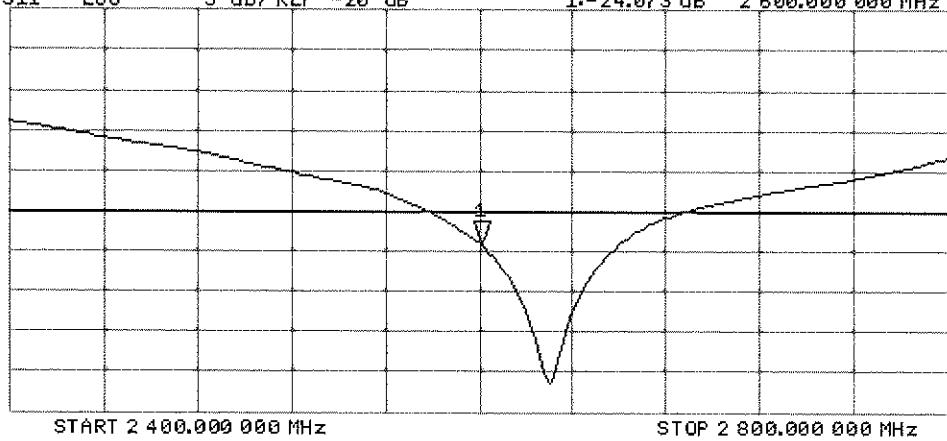

## DASY5 Validation Report for Body TSL

Date: 11.04.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN: 1004**

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.19$  S/m;  $\epsilon_r = 52.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.81, 7.81, 7.81); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 108.5 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 28.3 W/kg

**SAR(1 g) = 13.8 W/kg; SAR(10 g) = 6.2 W/kg**

Maximum value of SAR (measured) = 22.9 W/kg

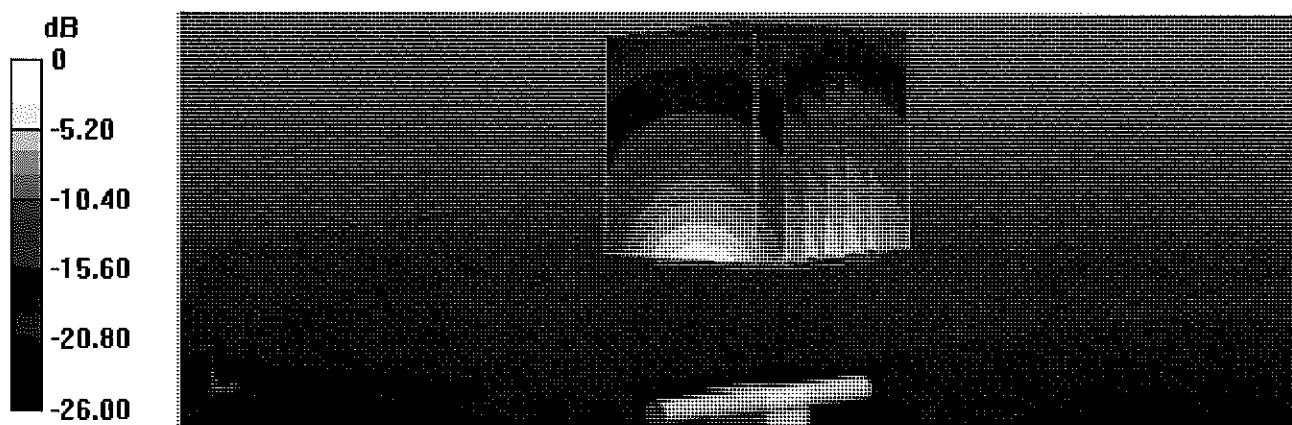


0 dB = 22.9 W/kg = 13.60 dBW/kg

# Impedance Measurement Plot for Body TSL

CH1 S11 1 U FS 11 Apr 2018 11:24:36  
 1: 46.039  $\Omega$  -3.7520  $\Omega$  16.315 pF 2 600.000 000 MHz

\*  
 Del  
 CA

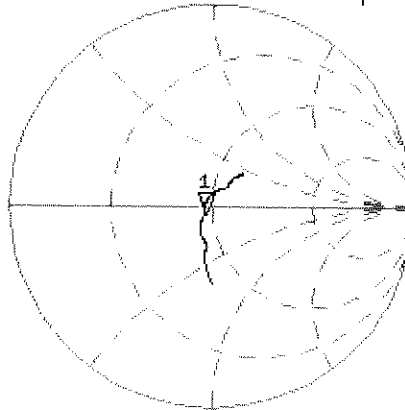

Avg  
 16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1: -24.921 dB 2 600.000 000 MHz

CA

Avg  
 16

H1d

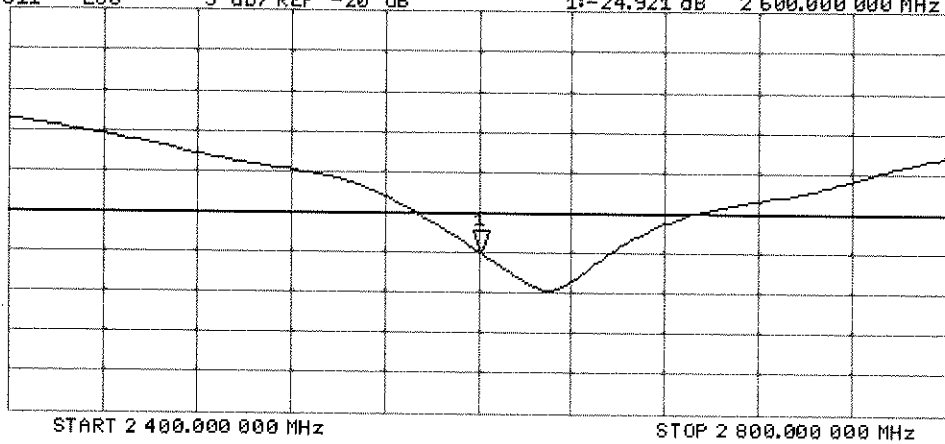



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D5GHzV2-1237\_Aug17**

## CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN:1237**

Calibration procedure(s) **QA CAL-22.v2**  
**Calibration procedure for dipole validation kits between 3-6 GHz**

PMV  
 8/27/17

Calibration date: **August 15, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^{\circ}\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter NRP             | SN: 104778         | 04-Apr-17 (No. 217-02521/02522)   | Apr-18                 |
| Power sensor NRP-Z91        | SN: 103244         | 04-Apr-17 (No. 217-02521)         | Apr-18                 |
| Power sensor NRP-Z91        | SN: 103245         | 04-Apr-17 (No. 217-02522)         | Apr-18                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 07-Apr-17 (No. 217-02528)         | Apr-18                 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 07-Apr-17 (No. 217-02529)         | Apr-18                 |
| Reference Probe EX3DV4      | SN: 3503           | 31-Dec-16 (No. EX3-3503_Dec16)    | Dec-17                 |
| DAE4                        | SN: 601            | 28-Mar-17 (No. DAE4-601_Mar17)    | Mar-18                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| Power meter EPM-442A        | SN: GB37480704     | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A       | SN: US37292783     | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A       | SN: MY41092317     | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| RF generator R&S SMT-06     | SN: 100972         | 15-Jun-15 (in house check Oct-16) | In house check: Oct-18 |
| Network Analyzer HP 8753E   | SN: US37390585     | 18-Oct-01 (in house check Oct-16) | In house check: Oct-17 |

Calibrated by: **Johannes Kurikka** Function: **Laboratory Technician**

Signature

Approved by: **Katja Pokovic** Technical Manager

*[Handwritten signatures]*

Issued: August 16, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

**Glossary:**

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                                                                      |                                  |
|------------------------------|----------------------------------------------------------------------|----------------------------------|
| DASY Version                 | DASY5                                                                | V52.10.0                         |
| Extrapolation                | Advanced Extrapolation                                               |                                  |
| Phantom                      | Modular Flat Phantom V5.0                                            |                                  |
| Distance Dipole Center - TSL | 10 mm                                                                | with Spacer                      |
| Zoom Scan Resolution         | dx, dy = 4.0 mm, dz = 1.4 mm                                         | Graded Ratio = 1.4 (Z direction) |
| Frequency                    | 5250 MHz $\pm$ 1 MHz<br>5600 MHz $\pm$ 1 MHz<br>5750 MHz $\pm$ 1 MHz |                                  |

## Head TSL parameters at 5250 MHz

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 35.9           | 4.71 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 34.7 $\pm$ 6 % | 4.49 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL at 5250 MHz

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
| SAR measured                                          | 100 mW input power | 8.14 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 80.7 W/kg $\pm$ 19.9 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
| SAR measured                                            | 100 mW input power | 2.33 W/kg                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 23.0 W/kg $\pm$ 19.5 % (k=2) |



### Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.5         | 5.07 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 34.2 ± 6 %   | 4.84 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Head TSL at 5600 MHz

|                                                       |                    |                            |
|-------------------------------------------------------|--------------------|----------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                            |
| SAR measured                                          | 100 mW input power | 8.33 W/kg                  |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 82.5 W / kg ± 19.9 % (k=2) |

|                                                         |                    |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                          |
| SAR measured                                            | 100 mW input power | 2.38 W/kg                |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 23.5 W/kg ± 19.5 % (k=2) |

### Head TSL parameters at 5750 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.4         | 5.22 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 34.0 ± 6 %   | 4.99 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Head TSL at 5750 MHz

|                                                       |                    |                          |
|-------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                          |
| SAR measured                                          | 100 mW input power | 8.10 W/kg                |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 80.2 W/kg ± 19.9 % (k=2) |

|                                                         |                    |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                          |
| SAR measured                                            | 100 mW input power | 2.31 W/kg                |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 22.8 W/kg ± 19.5 % (k=2) |

### Body TSL parameters at 5250 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.9         | 5.36 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 47.0 ± 6 %   | 5.46 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Body TSL at 5250 MHz

|                                                       |                    |                          |
|-------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                          |
| SAR measured                                          | 100 mW input power | 7.75 W/kg                |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 76.9 W/kg ± 19.9 % (k=2) |

|                                                         |                    |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                          |
| SAR measured                                            | 100 mW input power | 2.17 W/kg                |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 21.5 W/kg ± 19.5 % (k=2) |

### Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.5         | 5.77 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 46.4 ± 6 %   | 5.93 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Body TSL at 5600 MHz

|                                                       |                    |                          |
|-------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                          |
| SAR measured                                          | 100 mW input power | 7.91 W/kg                |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 78.5 W/kg ± 19.9 % (k=2) |

|                                                         |                    |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                          |
| SAR measured                                            | 100 mW input power | 2.23 W/kg                |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 22.1 W/kg ± 19.5 % (k=2) |

### Body TSL parameters at 5750 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.3         | 5.94 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 46.2 ± 6 %   | 6.13 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Body TSL at 5750 MHz

|                                                       |                    |                          |
|-------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                          |
| SAR measured                                          | 100 mW input power | 7.77 W/kg                |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 77.1 W/kg ± 19.9 % (k=2) |

|                                                         |                    |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                          |
| SAR measured                                            | 100 mW input power | 2.16 W/kg                |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 21.4 W/kg ± 19.5 % (k=2) |

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL at 5250 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 49.9 $\Omega$ - 5.3 j $\Omega$ |
| Return Loss                          | - 25.5 dB                      |

### Antenna Parameters with Head TSL at 5600 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 51.9 $\Omega$ + 2.3 j $\Omega$ |
| Return Loss                          | - 30.7 dB                      |

### Antenna Parameters with Head TSL at 5750 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 55.6 $\Omega$ - 0.5 j $\Omega$ |
| Return Loss                          | - 25.5 dB                      |

### Antenna Parameters with Body TSL at 5250 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 46.9 $\Omega$ - 4.2 j $\Omega$ |
| Return Loss                          | - 25.4 dB                      |

### Antenna Parameters with Body TSL at 5600 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 50.2 $\Omega$ + 3.0 j $\Omega$ |
| Return Loss                          | - 30.4 dB                      |

### Antenna Parameters with Body TSL at 5750 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 53.4 $\Omega$ + 0.2 j $\Omega$ |
| Return Loss                          | - 29.7 dB                      |

## General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.194 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |              |
|-----------------|--------------|
| Manufactured by | SPEAG        |
| Manufactured on | May 04, 2015 |

## DASY5 Validation Report for Head TSL

Date: 15.08.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1237**

Communication System: UID 0 - CW; Frequency: 5250 MHz, Frequency: 5600 MHz, Frequency: 5750 MHz  
Medium parameters used:  $f = 5250$  MHz;  $\sigma = 4.49$  S/m;  $\epsilon_r = 34.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>,  
Medium parameters used:  $f = 5600$  MHz;  $\sigma = 4.84$  S/m;  $\epsilon_r = 34.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>,  
Medium parameters used:  $f = 5750$  MHz;  $\sigma = 4.99$  S/m;  $\epsilon_r = 34$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.58, 5.58, 5.58); Calibrated: 31.12.2016, ConvF(5.09, 5.09, 5.09); Calibrated: 31.12.2016, ConvF(5.02, 5.02, 5.02); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5250 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 70.08 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 30.6 W/kg

**SAR(1 g) = 8.14 W/kg; SAR(10 g) = 2.33 W/kg**

Maximum value of SAR (measured) = 19.2 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 70.04 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 32.7 W/kg

**SAR(1 g) = 8.33 W/kg; SAR(10 g) = 2.38 W/kg**

Maximum value of SAR (measured) = 19.8 W/kg



**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5750 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 69.11 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 32.4 W/kg

**SAR(1 g) = 8.1 W/kg; SAR(10 g) = 2.31 W/kg**

Maximum value of SAR (measured) = 19.6 W/kg

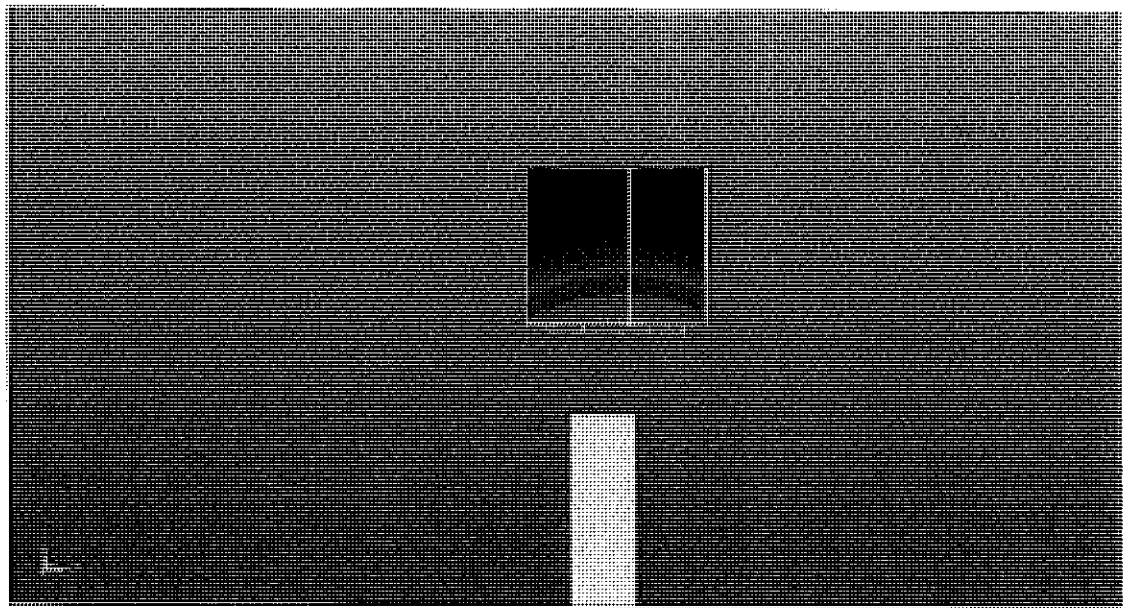


0 dB = 19.2 W/kg = 12.83 dBW/kg

# Impedance Measurement Plot for Head TSL

9 Aug 2017 12:04:29  
 CH1 S11 1 U FS 1: 49.920  $\Omega$  -5.3223  $\Omega$  5.6959 pF 5 250.000 000 MHz


\*  
 Del  
 Cor  
 Avg  
 16  
 H1d

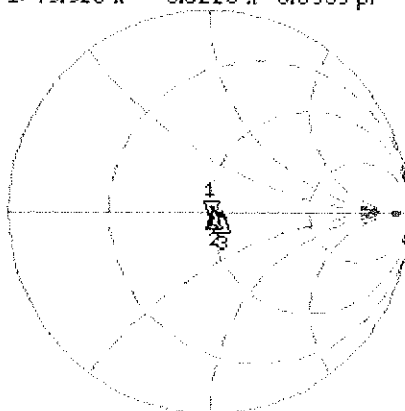

CH1 Markers  
 2: 51.904  $\Omega$   
 2.3008  $\Omega$   
 5.60000 GHz  
 3: 55.609  $\Omega$   
 -492.19 m $\Omega$   
 5.75000 GHz

CH2 S11 LOG 5 dB/ REF -20 dB 1: -25.482 dB 5 250.000 000 MHz

Cor  
 Avg  
 16  
 H1d

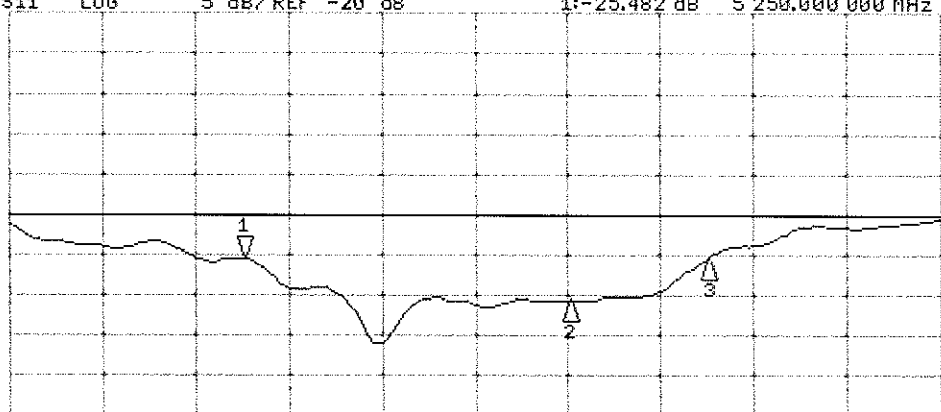

CH2 Markers  
 2: -30.654 dB  
 5.60000 GHz  
 3: -25.460 dB  
 5.75000 GHz

START 5 000.000 000 MHz

STOP 6 000.000 000 MHz

## DASY5 Validation Report for Body TSL

Date: 08.08.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1237**

Communication System: UID 0 - CW; Frequency: 5250 MHz, Frequency: 5600 MHz, Frequency: 5750 MHz  
Medium parameters used:  $f = 5250 \text{ MHz}$ ;  $\sigma = 5.46 \text{ S/m}$ ;  $\epsilon_r = 47$ ;  $\rho = 1000 \text{ kg/m}^3$ ,  
Medium parameters used:  $f = 5600 \text{ MHz}$ ;  $\sigma = 5.93 \text{ S/m}$ ;  $\epsilon_r = 46.4$ ;  $\rho = 1000 \text{ kg/m}^3$ ,  
Medium parameters used:  $f = 5750 \text{ MHz}$ ;  $\sigma = 6.13 \text{ S/m}$ ;  $\epsilon_r = 46.2$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.14, 5.14, 5.14); Calibrated: 31.12.2016, ConvF(4.57, 4.57, 4.57); Calibrated: 31.12.2016, ConvF(4.51, 4.51, 4.51); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5250MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.87 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 29.9 W/kg

**SAR(1 g) = 7.75 W/kg; SAR(10 g) = 2.17 W/kg**

Maximum value of SAR (measured) = 18.4 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.11 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 33.0 W/kg

**SAR(1 g) = 7.91 W/kg; SAR(10 g) = 2.23 W/kg**

Maximum value of SAR (measured) = 19.3 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5750 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm



Reference Value = 63.64 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 33.8 W/kg

**SAR(1 g) = 7.77 W/kg; SAR(10 g) = 2.16 W/kg**

Maximum value of SAR (measured) = 19.1 W/kg



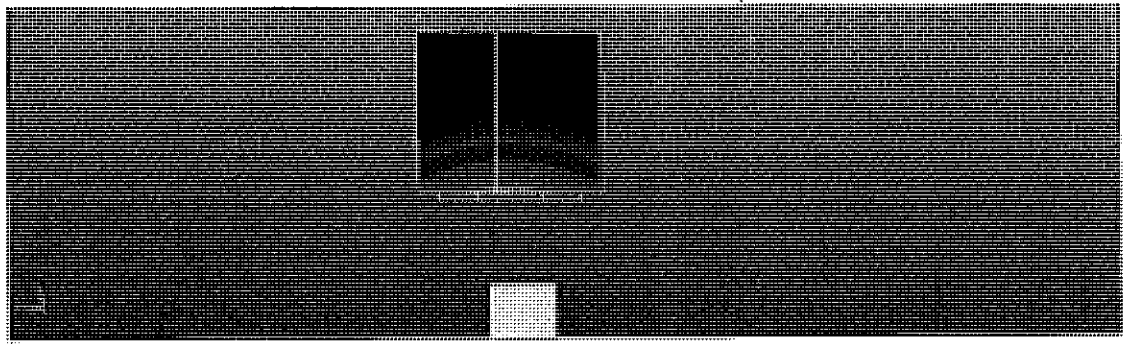


0 dB = 18.4 W/kg = 12.65 dBW/kg

# Impedance Measurement Plot for Body TSL

8 Aug 2017 15:23:50  
 CH1 S11 1 U FS 1: 46.885  $\Omega$  -4.1973  $\Omega$  7.2226 pF 5 250.000 000 MHz


\*  
 De1  
 Cor  
 Avg  
 16  
 H1d

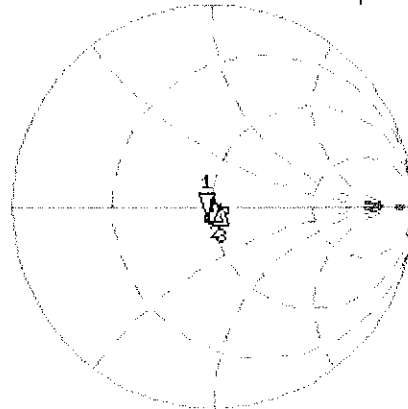

CH1 Markers  
 2: 50.184  $\Omega$   
 3: 0.215  $\Omega$   
 5.60000 GHz  
 3: 53.363  $\Omega$   
 0.1719  $\Omega$   
 5.75000 GHz

CH2 S11 LOG 5 dB/REF -20 dB 1: -25.364 dB 5 250.000 000 MHz

Cor  
 Avg  
 16  
 H1d

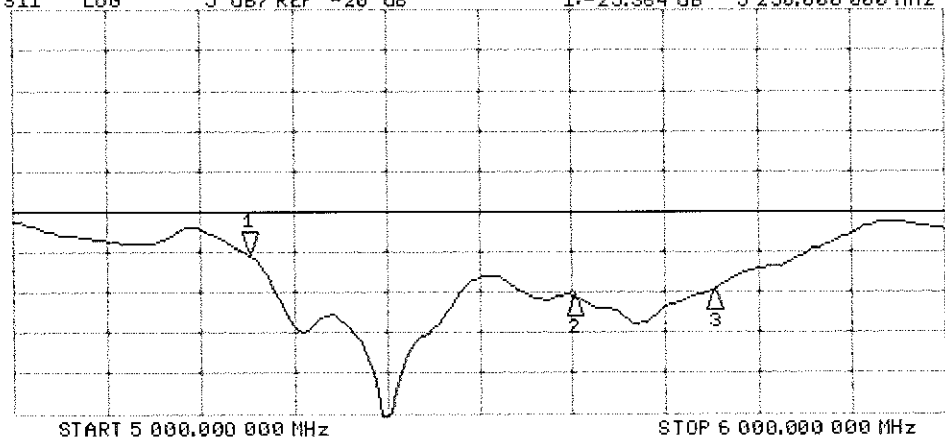

CH2 Markers  
 2: -30.389 dB  
 5.60000 GHz  
 3: -29.742 dB  
 5.75000 GHz



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **ES3-3347\_Mar18**

## CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3347**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6**  
**Calibration procedure for dosimetric E-field probes**

Calibration date: **March 27, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|------------------|-----------------------------------|------------------------|
| Power meter NRP            | SN: 104778       | 04-Apr-17 (No. 217-02521/02522)   | Apr-18                 |
| Power sensor NRP-Z91       | SN: 103244       | 04-Apr-17 (No. 217-02521)         | Apr-18                 |
| Power sensor NRP-Z91       | SN: 103245       | 04-Apr-17 (No. 217-02525)         | Apr-18                 |
| Reference 20 dB Attenuator | SN: S5277 (20x)  | 07-Apr-17 (No. 217-02528)         | Apr-18                 |
| Reference Probe ES3DV2     | SN: 3013         | 30-Dec-17 (No. ES3-3013_Dec17)    | Dec-18                 |
| DAE4                       | SN: 660          | 21-Dec-17 (No. DAE4-660_Dec17)    | Dec-18                 |
| Secondary Standards        | ID               | Check Date (in house)             | Scheduled Check        |
| Power meter E4419B         | SN: GB41293874   | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A        | SN: MY41498087   | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A        | SN: 000110210    | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| RF generator HP 8648C      | SN: US3642U01700 | 04-Aug-99 (in house check Jun-16) | In house check: Jun-18 |
| Network Analyzer HP 8753E  | SN: US37390585   | 18-Oct-01 (in house check Oct-17) | In house check: Oct-18 |

|                                                                                                                 |               |                       |                        |
|-----------------------------------------------------------------------------------------------------------------|---------------|-----------------------|------------------------|
| Calibrated by:                                                                                                  | Name          | Function              | Signature              |
|                                                                                                                 | Michael Weber | Laboratory Technician |                        |
| Approved by:                                                                                                    | Katja Pokovic | Technical Manager     |                        |
|                                                                                                                 |               |                       | Issued: March 27, 2018 |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. |               |                       |                        |



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

### Glossary:

|                          |                                                                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                      | tissue simulating liquid                                                                                                                                |
| NORM <sub>x,y,z</sub>    | sensitivity in free space                                                                                                                               |
| ConvF                    | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                              |
| DCP                      | diode compression point                                                                                                                                 |
| CF                       | crest factor (1/duty_cycle) of the RF signal                                                                                                            |
| A, B, C, D               | modulation dependent linearization parameters                                                                                                           |
| Polarization $\phi$      | $\phi$ rotation around probe axis                                                                                                                       |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle          | information used in DASY system to align probe sensor X to the robot coordinate system                                                                  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the  $E^2$ -field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

# Probe ES3DV3

## SN:3347

|               |                |
|---------------|----------------|
| Manufactured: | March 15, 2012 |
| Repaired:     | March 15, 2018 |
| Calibrated:   | March 27, 2018 |

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3347

### Basic Calibration Parameters

|                                                           | Sensor X | Sensor Y | Sensor Z | Unc (k=2)     |
|-----------------------------------------------------------|----------|----------|----------|---------------|
| Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 1.15     | 1.18     | 1.21     | $\pm 10.1 \%$ |
| DCP (mV) <sup>B</sup>                                     | 101.9    | 105.1    | 102.9    |               |

### Modulation Calibration Parameters

| UID | Communication System Name |   | A<br>dB | B<br>dB/ $\mu\text{V}$ | C   | D<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|-----|---------------------------|---|---------|------------------------|-----|---------|----------|---------------------------|
| 0   | CW                        | X | 0.0     | 0.0                    | 1.0 | 0.00    | 201.8    | $\pm 3.3 \%$              |
|     |                           | Y | 0.0     | 0.0                    | 1.0 |         | 203.9    |                           |
|     |                           | Z | 0.0     | 0.0                    | 1.0 |         | 204.8    |                           |

Note: For details on UID parameters see Appendix.

### Sensor Model Parameters

|   | C1<br>fF | C2<br>fF | $\alpha$<br>$\text{V}^{-1}$ | T1<br>$\text{ms} \cdot \text{V}^{-2}$ | T2<br>$\text{ms} \cdot \text{V}^{-1}$ | T3<br>ms | T4<br>$\text{V}^{-2}$ | T5<br>$\text{V}^{-1}$ | T6    |
|---|----------|----------|-----------------------------|---------------------------------------|---------------------------------------|----------|-----------------------|-----------------------|-------|
| X | 52.41    | 376.6    | 35.43                       | 28.01                                 | 1.852                                 | 5.10     | 0.578                 | 0.488                 | 1.008 |
| Y | 42.65    | 300.9    | 34.31                       | 25.12                                 | 1.310                                 | 5.10     | 1.279                 | 0.204                 | 1.011 |
| Z | 48.12    | 344.8    | 35.26                       | 27.10                                 | 1.587                                 | 5.10     | 0.868                 | 0.385                 | 1.009 |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3347

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 750                  | 41.9                               | 0.89                            | 6.77    | 6.77    | 6.77    | 0.65               | 1.32                    | ± 12.0 %  |
| 835                  | 41.5                               | 0.90                            | 6.41    | 6.41    | 6.41    | 0.40               | 1.64                    | ± 12.0 %  |
| 1750                 | 40.1                               | 1.37                            | 5.58    | 5.58    | 5.58    | 0.54               | 1.42                    | ± 12.0 %  |
| 1900                 | 40.0                               | 1.40                            | 5.36    | 5.36    | 5.36    | 0.80               | 1.16                    | ± 12.0 %  |
| 2300                 | 39.5                               | 1.67                            | 5.11    | 5.11    | 5.11    | 0.74               | 1.29                    | ± 12.0 %  |
| 2450                 | 39.2                               | 1.80                            | 4.81    | 4.81    | 4.81    | 0.80               | 1.24                    | ± 12.0 %  |
| 2600                 | 39.0                               | 1.96                            | 4.66    | 4.66    | 4.66    | 0.75               | 1.25                    | ± 12.0 %  |

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3347

### Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 750                  | 55.5                               | 0.96                            | 6.59    | 6.59    | 6.59    | 0.77               | 1.22                    | ± 12.0 %  |
| 835                  | 55.2                               | 0.97                            | 6.37    | 6.37    | 6.37    | 0.80               | 1.17                    | ± 12.0 %  |
| 1750                 | 53.4                               | 1.49                            | 5.17    | 5.17    | 5.17    | 0.49               | 1.59                    | ± 12.0 %  |
| 1900                 | 53.3                               | 1.52                            | 4.94    | 4.94    | 4.94    | 0.52               | 1.49                    | ± 12.0 %  |
| 2300                 | 52.9                               | 1.81                            | 4.74    | 4.74    | 4.74    | 0.80               | 1.25                    | ± 12.0 %  |
| 2450                 | 52.7                               | 1.95                            | 4.64    | 4.64    | 4.64    | 0.75               | 1.20                    | ± 12.0 %  |
| 2600                 | 52.5                               | 2.16                            | 4.49    | 4.49    | 4.49    | 0.80               | 1.20                    | ± 12.0 %  |


<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.




**Frequency Response of E-Field**  
(TEM-Cell:ifi110 EXX, Waveguide: R22)

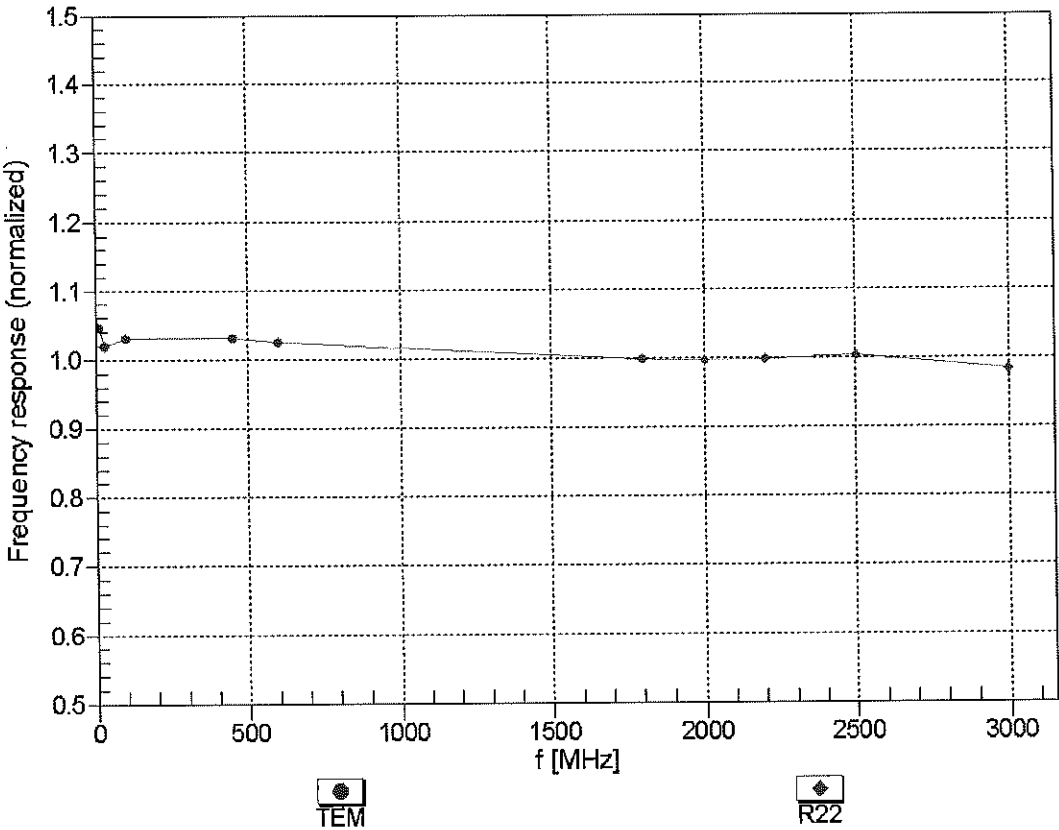



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)

Receiving Pattern ( $\phi$ ),  $\theta = 0^\circ$

f=600 MHz,TEM


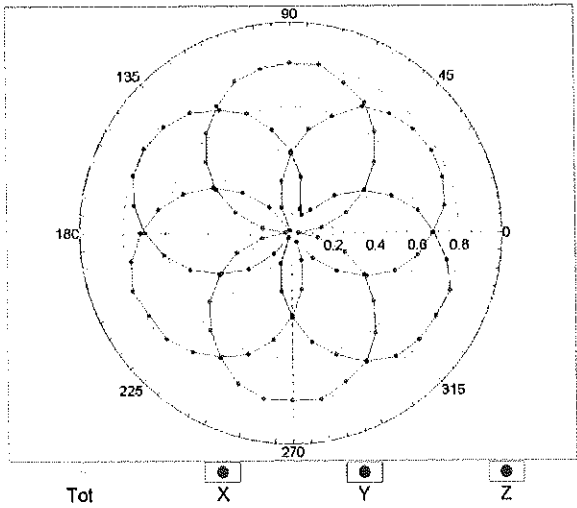


f=1800 MHz,R22

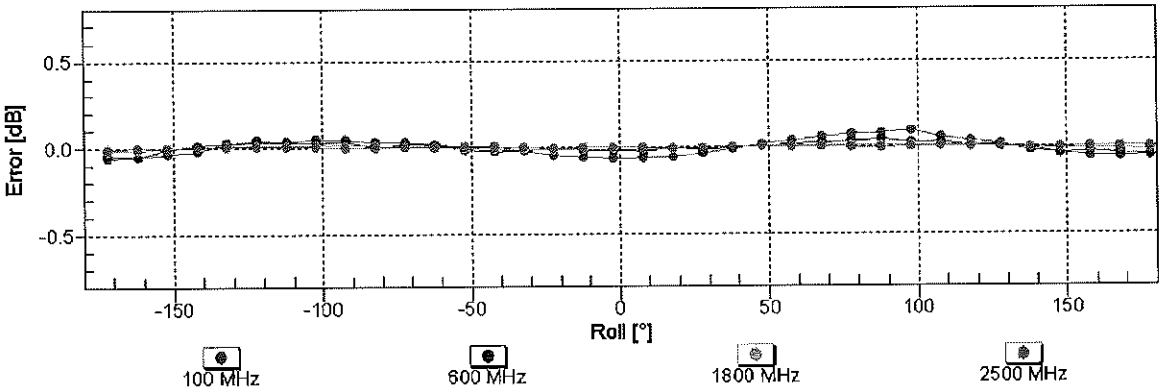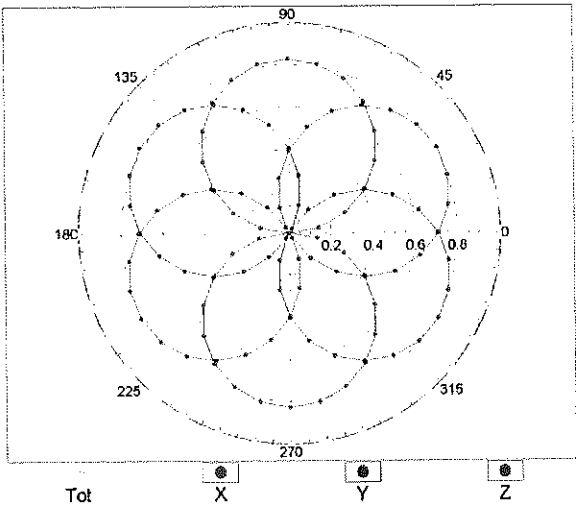


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)

Dynamic Range f(SAR<sub>head</sub>)  
(TEM cell , f<sub>eval</sub>= 1900 MHz)

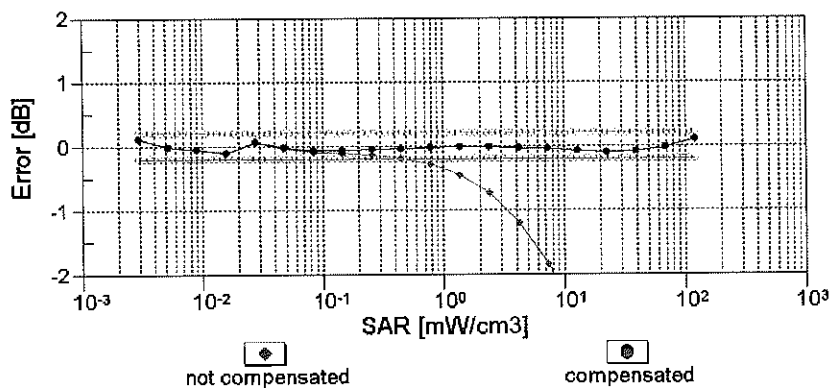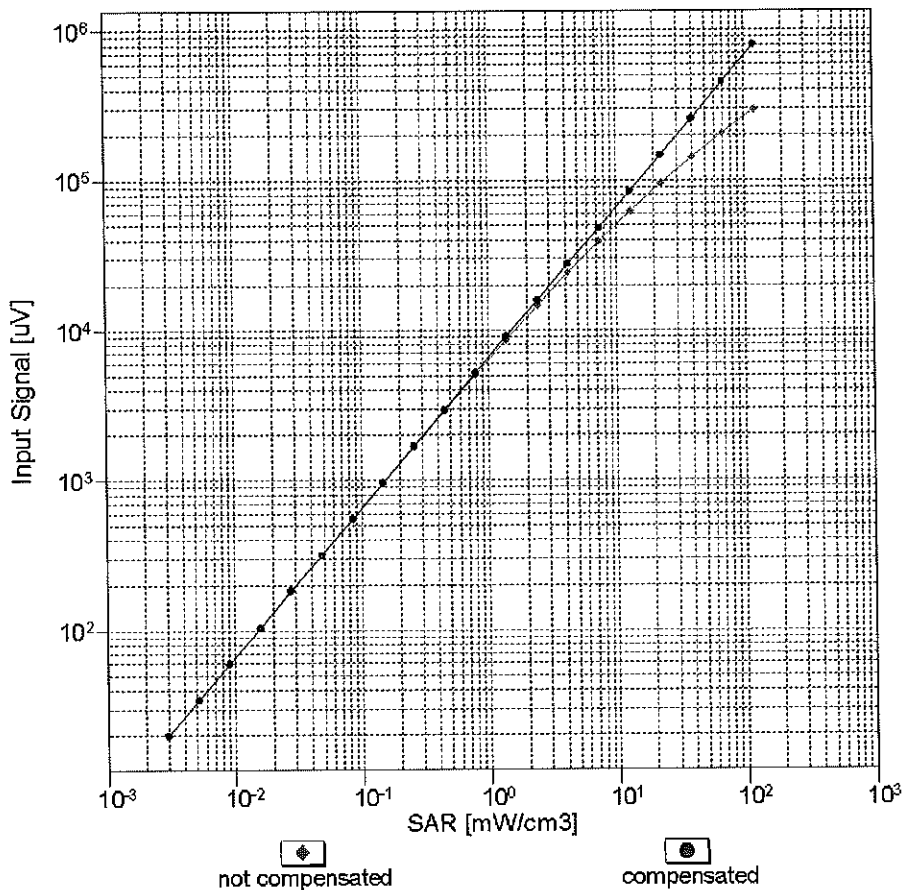



Uncertainty of Linearity Assessment: ± 0.6% (k=2)

## Conversion Factor Assessment

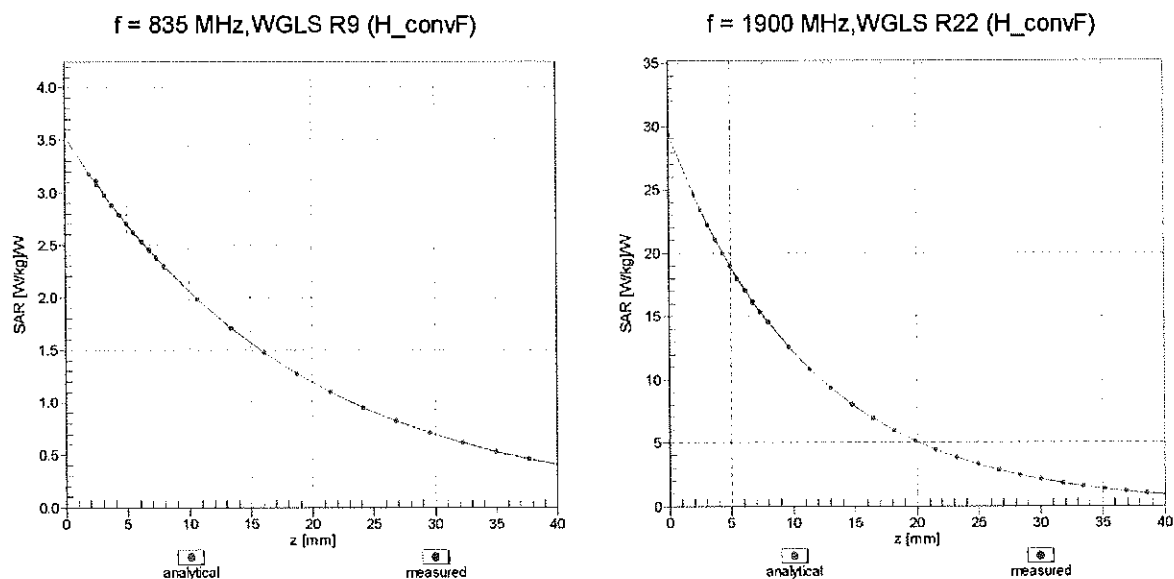

## Deviation from Isotropy in Liquid

Error ( $\phi, \theta$ ),  $f = 900 \text{ MHz}$

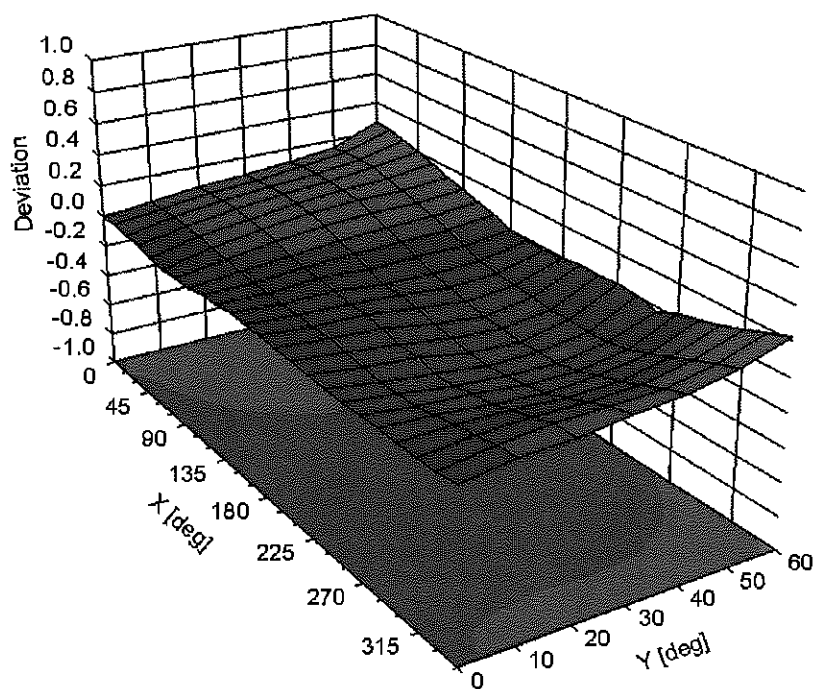

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3347

### Other Probe Parameters

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | -16.5      |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disabled   |
| Probe Overall Length                          | 337 mm     |
| Probe Body Diameter                           | 10 mm      |
| Tip Length                                    | 10 mm      |
| Tip Diameter                                  | 4 mm       |
| Probe Tip to Sensor X Calibration Point       | 2 mm       |
| Probe Tip to Sensor Y Calibration Point       | 2 mm       |
| Probe Tip to Sensor Z Calibration Point       | 2 mm       |
| Recommended Measurement Distance from Surface | 3 mm       |

**Appendix: Modulation Calibration Parameters**

| UID           | Communication System Name                     |   | A<br>dB | B<br>dB $\sqrt{\mu V}$ | C     | D<br>dB | VR<br>mV | Max<br>Unc <sup>E</sup><br>(k=2) |
|---------------|-----------------------------------------------|---|---------|------------------------|-------|---------|----------|----------------------------------|
| 0             | CW                                            | X | 0.00    | 0.00                   | 1.00  | 0.00    | 201.8    | $\pm 3.3 \%$                     |
|               |                                               | Y | 0.00    | 0.00                   | 1.00  |         | 203.9    |                                  |
|               |                                               | Z | 0.00    | 0.00                   | 1.00  |         | 204.8    |                                  |
| 10010-<br>CAA | SAR Validation (Square, 100ms, 10ms)          | X | 7.57    | 78.06                  | 17.49 | 10.00   | 25.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 9.85    | 82.39                  | 18.69 |         | 25.0     |                                  |
|               |                                               | Z | 7.35    | 77.81                  | 17.08 |         | 25.0     |                                  |
| 10011-<br>CAB | UMTS-FDD (WCDMA)                              | X | 0.93    | 66.02                  | 14.08 | 0.00    | 150.0    | $\pm 9.6 \%$                     |
|               |                                               | Y | 0.97    | 66.67                  | 14.52 |         | 150.0    |                                  |
|               |                                               | Z | 0.93    | 66.21                  | 14.17 |         | 150.0    |                                  |
| 10012-<br>CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)      | X | 1.22    | 64.40                  | 15.16 | 0.41    | 150.0    | $\pm 9.6 \%$                     |
|               |                                               | Y | 1.24    | 64.68                  | 15.35 |         | 150.0    |                                  |
|               |                                               | Z | 1.21    | 64.49                  | 15.23 |         | 150.0    |                                  |
| 10013-<br>CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | X | 5.02    | 67.09                  | 17.26 | 1.46    | 150.0    | $\pm 9.6 \%$                     |
|               |                                               | Y | 4.93    | 67.32                  | 17.31 |         | 150.0    |                                  |
|               |                                               | Z | 4.97    | 67.16                  | 17.27 |         | 150.0    |                                  |
| 10021-<br>DAC | GSM-FDD (TDMA, GMSK)                          | X | 91.36   | 118.07                 | 31.34 | 9.39    | 50.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 119.30                 | 31.14 |         | 50.0     |                                  |
|               |                                               | Z | 100.00  | 118.75                 | 31.10 |         | 50.0     |                                  |
| 10023-<br>DAC | GPRS-FDD (TDMA, GMSK, TN 0)                   | X | 58.54   | 111.16                 | 29.65 | 9.57    | 50.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 119.20                 | 31.14 |         | 50.0     |                                  |
|               |                                               | Z | 100.00  | 118.71                 | 31.13 |         | 50.0     |                                  |
| 10024-<br>DAC | GPRS-FDD (TDMA, GMSK, TN 0-1)                 | X | 100.00  | 115.85                 | 28.82 | 6.56    | 60.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 116.32                 | 28.70 |         | 60.0     |                                  |
|               |                                               | Z | 100.00  | 115.26                 | 28.36 |         | 60.0     |                                  |
| 10025-<br>DAC | EDGE-FDD (TDMA, 8PSK, TN 0)                   | X | 19.84   | 109.66                 | 41.73 | 12.57   | 50.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 49.03   | 143.08                 | 53.86 |         | 50.0     |                                  |
|               |                                               | Z | 21.37   | 113.26                 | 43.24 |         | 50.0     |                                  |
| 10026-<br>DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1)                 | X | 21.22   | 106.46                 | 36.65 | 9.56    | 60.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 31.58   | 119.85                 | 41.69 |         | 60.0     |                                  |
|               |                                               | Z | 22.56   | 108.96                 | 37.62 |         | 60.0     |                                  |
| 10027-<br>DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2)               | X | 100.00  | 114.36                 | 27.28 | 4.80    | 80.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 115.58                 | 27.56 |         | 80.0     |                                  |
|               |                                               | Z | 100.00  | 113.91                 | 26.92 |         | 80.0     |                                  |
| 10028-<br>DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)             | X | 100.00  | 113.86                 | 26.30 | 3.55    | 100.0    | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 115.98                 | 27.02 |         | 100.0    |                                  |
|               |                                               | Z | 100.00  | 113.53                 | 26.01 |         | 100.0    |                                  |
| 10029-<br>DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2)               | X | 12.94   | 95.02                  | 31.64 | 7.80    | 80.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 14.07   | 99.40                  | 33.81 |         | 80.0     |                                  |
|               |                                               | Z | 12.89   | 95.72                  | 32.02 |         | 80.0     |                                  |
| 10030-<br>CAA | IEEE 802.15.1 Bluetooth (GFSK, DH1)           | X | 100.00  | 113.99                 | 27.43 | 5.30    | 70.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 114.60                 | 27.41 |         | 70.0     |                                  |
|               |                                               | Z | 100.00  | 113.38                 | 26.98 |         | 70.0     |                                  |
| 10031-<br>CAA | IEEE 802.15.1 Bluetooth (GFSK, DH3)           | X | 100.00  | 111.77                 | 23.93 | 1.88    | 100.0    | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 115.39                 | 25.33 |         | 100.0    |                                  |
|               |                                               | Z | 100.00  | 111.26                 | 23.59 |         | 100.0    |                                  |

|           |                                                     |   |        |        |       |       |       |         |
|-----------|-----------------------------------------------------|---|--------|--------|-------|-------|-------|---------|
| 10032-CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5)                 | X | 100.00 | 111.85 | 22.94 | 1.17  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 100.00 | 118.40 | 25.59 |       | 100.0 |         |
|           |                                                     | Z | 100.00 | 111.34 | 22.62 |       | 100.0 |         |
| 10033-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)           | X | 23.91  | 101.19 | 27.41 | 5.30  | 70.0  | ± 9.6 % |
|           |                                                     | Y | 36.18  | 107.81 | 28.88 |       | 70.0  |         |
|           |                                                     | Z | 30.63  | 104.89 | 28.18 |       | 70.0  |         |
| 10034-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)           | X | 6.24   | 84.08  | 20.44 | 1.88  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 7.24   | 85.92  | 20.55 |       | 100.0 |         |
|           |                                                     | Z | 6.85   | 85.19  | 20.50 |       | 100.0 |         |
| 10035-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)           | X | 3.29   | 76.95  | 17.63 | 1.17  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 3.58   | 78.09  | 17.57 |       | 100.0 |         |
|           |                                                     | Z | 3.42   | 77.43  | 17.51 |       | 100.0 |         |
| 10036-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH1)               | X | 32.79  | 106.39 | 28.91 | 5.30  | 70.0  | ± 9.6 % |
|           |                                                     | Y | 55.24  | 114.58 | 30.68 |       | 70.0  |         |
|           |                                                     | Z | 45.73  | 111.34 | 29.95 |       | 70.0  |         |
| 10037-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH3)               | X | 5.86   | 83.28  | 20.13 | 1.88  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 6.54   | 84.66  | 20.12 |       | 100.0 |         |
|           |                                                     | Z | 6.31   | 84.13  | 20.12 |       | 100.0 |         |
| 10038-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH5)               | X | 3.39   | 77.59  | 17.96 | 1.17  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 3.66   | 78.64  | 17.87 |       | 100.0 |         |
|           |                                                     | Z | 3.53   | 78.11  | 17.85 |       | 100.0 |         |
| 10039-CAB | CDMA2000 (1xRTT, RC1)                               | X | 1.52   | 69.16  | 14.18 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                     | Y | 1.40   | 68.90  | 13.55 |       | 150.0 |         |
|           |                                                     | Z | 1.46   | 69.03  | 13.83 |       | 150.0 |         |
| 10042-CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate) | X | 100.00 | 114.62 | 28.47 | 7.78  | 50.0  | ± 9.6 % |
|           |                                                     | Y | 100.00 | 114.70 | 28.14 |       | 50.0  |         |
|           |                                                     | Z | 100.00 | 113.88 | 27.92 |       | 50.0  |         |
| 10044-CAA | IS-91/EIA/TIA-553 FDD (FDMA, FM)                    | X | 0.01   | 121.88 | 0.68  | 0.00  | 150.0 | ± 9.6 % |
|           |                                                     | Y | 0.00   | 97.83  | 1.91  |       | 150.0 |         |
|           |                                                     | Z | 0.01   | 122.55 | 0.35  |       | 150.0 |         |
| 10048-CAA | DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)           | X | 17.94  | 92.17  | 26.06 | 13.80 | 25.0  | ± 9.6 % |
|           |                                                     | Y | 42.19  | 107.21 | 29.95 |       | 25.0  |         |
|           |                                                     | Z | 24.74  | 97.63  | 27.36 |       | 25.0  |         |
| 10049-CAA | DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)         | X | 22.69  | 96.29  | 25.94 | 10.79 | 40.0  | ± 9.6 % |
|           |                                                     | Y | 68.20  | 113.74 | 30.23 |       | 40.0  |         |
|           |                                                     | Z | 32.65  | 101.85 | 27.19 |       | 40.0  |         |
| 10056-CAA | UMTS-TDD (TD-SCDMA, 1.28 Mcps)                      | X | 16.99  | 92.79  | 25.84 | 9.03  | 50.0  | ± 9.6 % |
|           |                                                     | Y | 27.63  | 101.84 | 28.34 |       | 50.0  |         |
|           |                                                     | Z | 20.13  | 95.81  | 26.57 |       | 50.0  |         |
| 10058-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)                   | X | 9.12   | 87.95  | 28.36 | 6.55  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 8.98   | 89.45  | 29.43 |       | 100.0 |         |
|           |                                                     | Z | 8.90   | 88.06  | 28.51 |       | 100.0 |         |
| 10059-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)            | X | 1.37   | 66.39  | 16.16 | 0.61  | 110.0 | ± 9.6 % |
|           |                                                     | Y | 1.38   | 66.59  | 16.33 |       | 110.0 |         |
|           |                                                     | Z | 1.36   | 66.49  | 16.23 |       | 110.0 |         |
| 10060-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)          | X | 100.00 | 128.08 | 31.98 | 1.30  | 110.0 | ± 9.6 % |
|           |                                                     | Y | 100.00 | 131.22 | 33.31 |       | 110.0 |         |
|           |                                                     | Z | 100.00 | 128.65 | 32.15 |       | 110.0 |         |

|           |                                                |   |       |       |       |      |       |         |
|-----------|------------------------------------------------|---|-------|-------|-------|------|-------|---------|
| 10061-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)      | X | 9.25  | 94.71 | 26.12 | 2.04 | 110.0 | ± 9.6 % |
|           |                                                | Y | 9.59  | 96.73 | 27.06 |      | 110.0 |         |
|           |                                                | Z | 10.28 | 96.95 | 26.85 |      | 110.0 |         |
| 10062-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)       | X | 4.74  | 66.85 | 16.53 | 0.49 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.66  | 67.04 | 16.57 |      | 100.0 |         |
|           |                                                | Z | 4.70  | 66.90 | 16.54 |      | 100.0 |         |
| 10063-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)       | X | 4.78  | 67.00 | 16.67 | 0.72 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.69  | 67.19 | 16.70 |      | 100.0 |         |
|           |                                                | Z | 4.73  | 67.05 | 16.68 |      | 100.0 |         |
| 10064-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)      | X | 5.09  | 67.32 | 16.93 | 0.86 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.97  | 67.46 | 16.94 |      | 100.0 |         |
|           |                                                | Z | 5.03  | 67.35 | 16.93 |      | 100.0 |         |
| 10065-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)      | X | 4.99  | 67.34 | 17.10 | 1.21 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.88  | 67.46 | 17.11 |      | 100.0 |         |
|           |                                                | Z | 4.93  | 67.36 | 17.10 |      | 100.0 |         |
| 10066-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)      | X | 5.05  | 67.46 | 17.33 | 1.46 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.92  | 67.57 | 17.33 |      | 100.0 |         |
|           |                                                | Z | 4.98  | 67.48 | 17.32 |      | 100.0 |         |
| 10067-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)      | X | 5.36  | 67.67 | 17.81 | 2.04 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.25  | 67.92 | 17.88 |      | 100.0 |         |
|           |                                                | Z | 5.30  | 67.73 | 17.82 |      | 100.0 |         |
| 10068-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)      | X | 5.48  | 67.95 | 18.15 | 2.55 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.33  | 68.04 | 18.16 |      | 100.0 |         |
|           |                                                | Z | 5.40  | 67.94 | 18.13 |      | 100.0 |         |
| 10069-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)      | X | 5.56  | 67.94 | 18.35 | 2.67 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.42  | 68.11 | 18.40 |      | 100.0 |         |
|           |                                                | Z | 5.49  | 67.96 | 18.34 |      | 100.0 |         |
| 10071-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)  | X | 5.16  | 67.32 | 17.64 | 1.99 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.07  | 67.53 | 17.70 |      | 100.0 |         |
|           |                                                | Z | 5.11  | 67.37 | 17.65 |      | 100.0 |         |
| 10072-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps) | X | 5.20  | 67.83 | 17.95 | 2.30 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.09  | 67.99 | 18.00 |      | 100.0 |         |
|           |                                                | Z | 5.14  | 67.86 | 17.96 |      | 100.0 |         |
| 10073-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps) | X | 5.32  | 68.17 | 18.37 | 2.83 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.22  | 68.36 | 18.44 |      | 100.0 |         |
|           |                                                | Z | 5.26  | 68.20 | 18.38 |      | 100.0 |         |
| 10074-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps) | X | 5.35  | 68.22 | 18.60 | 3.30 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.26  | 68.43 | 18.68 |      | 100.0 |         |
|           |                                                | Z | 5.29  | 68.25 | 18.61 |      | 100.0 |         |
| 10075-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps) | X | 5.48  | 68.62 | 19.07 | 3.82 | 90.0  | ± 9.6 % |
|           |                                                | Y | 5.35  | 68.73 | 19.11 |      | 90.0  |         |
|           |                                                | Z | 5.40  | 68.60 | 19.05 |      | 90.0  |         |
| 10076-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps) | X | 5.50  | 68.45 | 19.21 | 4.15 | 90.0  | ± 9.6 % |
|           |                                                | Y | 5.40  | 68.64 | 19.31 |      | 90.0  |         |
|           |                                                | Z | 5.44  | 68.46 | 19.21 |      | 90.0  |         |
| 10077-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps) | X | 5.54  | 68.54 | 19.31 | 4.30 | 90.0  | ± 9.6 % |
|           |                                                | Y | 5.44  | 68.76 | 19.43 |      | 90.0  |         |
|           |                                                | Z | 5.48  | 68.56 | 19.32 |      | 90.0  |         |



|           |                                                     |   |        |        |       |      |       |         |
|-----------|-----------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10081-CAB | CDMA2000 (1xRTT, RC3)                               | X | 0.74   | 64.32  | 11.31 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 0.70   | 64.20  | 10.81 |      | 150.0 |         |
|           |                                                     | Z | 0.71   | 64.15  | 10.92 |      | 150.0 |         |
| 10082-CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate) | X | 1.69   | 62.26  | 7.32  | 4.77 | 80.0  | ± 9.6 % |
|           |                                                     | Y | 1.49   | 62.02  | 6.99  |      | 80.0  |         |
|           |                                                     | Z | 1.55   | 61.83  | 6.90  |      | 80.0  |         |
| 10090-DAC | GPRS-FDD (TDMA, GMSK, TN 0-4)                       | X | 100.00 | 115.94 | 28.89 | 6.56 | 60.0  | ± 9.6 % |
|           |                                                     | Y | 100.00 | 116.39 | 28.75 |      | 60.0  |         |
|           |                                                     | Z | 100.00 | 115.35 | 28.42 |      | 60.0  |         |
| 10097-CAB | UMTS-FDD (HSDPA)                                    | X | 1.73   | 66.76  | 14.97 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 1.76   | 67.41  | 15.16 |      | 150.0 |         |
|           |                                                     | Z | 1.72   | 67.00  | 15.02 |      | 150.0 |         |
| 10098-CAB | UMTS-FDD (HSUPA, Subtest 2)                         | X | 1.69   | 66.71  | 14.93 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 1.72   | 67.36  | 15.13 |      | 150.0 |         |
|           |                                                     | Z | 1.69   | 66.94  | 14.98 |      | 150.0 |         |
| 10099-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-4)                       | X | 21.17  | 106.37 | 36.62 | 9.56 | 60.0  | ± 9.6 % |
|           |                                                     | Y | 31.53  | 119.75 | 41.66 |      | 60.0  |         |
|           |                                                     | Z | 22.53  | 108.88 | 37.59 |      | 60.0  |         |
| 10100-CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)            | X | 3.02   | 69.66  | 16.13 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.98   | 69.86  | 16.33 |      | 150.0 |         |
|           |                                                     | Z | 2.99   | 69.71  | 16.19 |      | 150.0 |         |
| 10101-CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)          | X | 3.20   | 67.30  | 15.63 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 3.15   | 67.42  | 15.72 |      | 150.0 |         |
|           |                                                     | Z | 3.17   | 67.31  | 15.65 |      | 150.0 |         |
| 10102-CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)          | X | 3.31   | 67.28  | 15.74 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 3.26   | 67.39  | 15.81 |      | 150.0 |         |
|           |                                                     | Z | 3.27   | 67.30  | 15.76 |      | 150.0 |         |
| 10103-CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)            | X | 8.39   | 78.42  | 21.27 | 3.98 | 65.0  | ± 9.6 % |
|           |                                                     | Y | 8.55   | 79.75  | 21.92 |      | 65.0  |         |
|           |                                                     | Z | 8.43   | 78.92  | 21.50 |      | 65.0  |         |
| 10104-CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)          | X | 8.28   | 76.92  | 21.52 | 3.98 | 65.0  | ± 9.6 % |
|           |                                                     | Y | 8.11   | 77.48  | 21.85 |      | 65.0  |         |
|           |                                                     | Z | 8.18   | 77.09  | 21.61 |      | 65.0  |         |
| 10105-CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)          | X | 7.63   | 75.31  | 21.13 | 3.98 | 65.0  | ± 9.6 % |
|           |                                                     | Y | 7.72   | 76.48  | 21.73 |      | 65.0  |         |
|           |                                                     | Z | 7.57   | 75.55  | 21.26 |      | 65.0  |         |
| 10108-CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)            | X | 2.65   | 68.92  | 15.95 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.59   | 69.14  | 16.15 |      | 150.0 |         |
|           |                                                     | Z | 2.61   | 68.99  | 16.01 |      | 150.0 |         |
| 10109-CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)          | X | 2.86   | 67.08  | 15.50 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.80   | 67.24  | 15.55 |      | 150.0 |         |
|           |                                                     | Z | 2.82   | 67.11  | 15.51 |      | 150.0 |         |
| 10110-CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)             | X | 2.15   | 67.97  | 15.52 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.09   | 68.27  | 15.68 |      | 150.0 |         |
|           |                                                     | Z | 2.11   | 68.06  | 15.56 |      | 150.0 |         |
| 10111-CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)           | X | 2.54   | 67.60  | 15.65 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.49   | 67.90  | 15.64 |      | 150.0 |         |
|           |                                                     | Z | 2.51   | 67.74  | 15.66 |      | 150.0 |         |

|           |                                                |   |      |       |       |      |       |         |
|-----------|------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10112-CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)     | X | 2.98 | 67.08 | 15.57 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.92 | 67.27 | 15.62 |      | 150.0 |         |
|           |                                                | Z | 2.94 | 67.13 | 15.58 |      | 150.0 |         |
| 10113-CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)      | X | 2.70 | 67.76 | 15.81 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.63 | 68.07 | 15.78 |      | 150.0 |         |
|           |                                                | Z | 2.66 | 67.92 | 15.82 |      | 150.0 |         |
| 10114-CAC | IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)  | X | 5.13 | 67.22 | 16.34 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.06 | 67.35 | 16.39 |      | 150.0 |         |
|           |                                                | Z | 5.10 | 67.28 | 16.37 |      | 150.0 |         |
| 10115-CAC | IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)  | X | 5.46 | 67.47 | 16.48 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.32 | 67.42 | 16.43 |      | 150.0 |         |
|           |                                                | Z | 5.39 | 67.43 | 16.46 |      | 150.0 |         |
| 10116-CAC | IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM) | X | 5.25 | 67.46 | 16.39 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.15 | 67.53 | 16.41 |      | 150.0 |         |
|           |                                                | Z | 5.20 | 67.47 | 16.40 |      | 150.0 |         |
| 10117-CAC | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)       | X | 5.10 | 67.11 | 16.30 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.03 | 67.22 | 16.34 |      | 150.0 |         |
|           |                                                | Z | 5.06 | 67.11 | 16.31 |      | 150.0 |         |
| 10118-CAC | IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)       | X | 5.56 | 67.71 | 16.61 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.40 | 67.63 | 16.55 |      | 150.0 |         |
|           |                                                | Z | 5.48 | 67.67 | 16.59 |      | 150.0 |         |
| 10119-CAC | IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)      | X | 5.22 | 67.39 | 16.37 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.13 | 67.49 | 16.40 |      | 150.0 |         |
|           |                                                | Z | 5.18 | 67.42 | 16.38 |      | 150.0 |         |
| 10140-CAD | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)     | X | 3.35 | 67.28 | 15.66 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 3.29 | 67.41 | 15.73 |      | 150.0 |         |
|           |                                                | Z | 3.31 | 67.30 | 15.68 |      | 150.0 |         |
| 10141-CAD | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)     | X | 3.47 | 67.38 | 15.84 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 3.41 | 67.52 | 15.90 |      | 150.0 |         |
|           |                                                | Z | 3.43 | 67.42 | 15.86 |      | 150.0 |         |
| 10142-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)        | X | 1.91 | 67.75 | 15.10 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 1.84 | 68.07 | 15.11 |      | 150.0 |         |
|           |                                                | Z | 1.87 | 67.86 | 15.08 |      | 150.0 |         |
| 10143-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)      | X | 2.37 | 68.04 | 15.25 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.29 | 68.28 | 15.02 |      | 150.0 |         |
|           |                                                | Z | 2.33 | 68.17 | 15.16 |      | 150.0 |         |
| 10144-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)      | X | 2.20 | 66.14 | 13.84 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.08 | 66.17 | 13.48 |      | 150.0 |         |
|           |                                                | Z | 2.13 | 66.11 | 13.65 |      | 150.0 |         |
| 10145-CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)      | X | 1.17 | 64.40 | 11.32 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 0.99 | 63.23 | 9.93  |      | 150.0 |         |
|           |                                                | Z | 1.08 | 63.80 | 10.61 |      | 150.0 |         |
| 10146-CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)    | X | 2.07 | 66.79 | 12.08 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 1.74 | 65.46 | 10.58 |      | 150.0 |         |
|           |                                                | Z | 1.93 | 66.25 | 11.43 |      | 150.0 |         |
| 10147-CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)    | X | 2.41 | 68.68 | 13.11 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.02 | 67.13 | 11.50 |      | 150.0 |         |
|           |                                                | Z | 2.26 | 68.13 | 12.45 |      | 150.0 |         |

|           |                                            |   |      |       |       |      |       |         |
|-----------|--------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10149-CAD | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)  | X | 2.87 | 67.13 | 15.54 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.81 | 67.29 | 15.59 |      | 150.0 |         |
|           |                                            | Z | 2.83 | 67.17 | 15.55 |      | 150.0 |         |
| 10150-CAD | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)  | X | 2.99 | 67.13 | 15.61 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.93 | 67.31 | 15.66 |      | 150.0 |         |
|           |                                            | Z | 2.95 | 67.18 | 15.62 |      | 150.0 |         |
| 10151-CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)    | X | 9.21 | 81.33 | 22.45 | 3.98 | 65.0  | ± 9.6 % |
|           |                                            | Y | 9.55 | 83.12 | 23.24 |      | 65.0  |         |
|           |                                            | Z | 9.38 | 82.15 | 22.79 |      | 65.0  |         |
| 10152-CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)  | X | 7.89 | 77.12 | 21.32 | 3.98 | 65.0  | ± 9.6 % |
|           |                                            | Y | 7.75 | 77.78 | 21.62 |      | 65.0  |         |
|           |                                            | Z | 7.80 | 77.32 | 21.39 |      | 65.0  |         |
| 10153-CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)  | X | 8.33 | 78.05 | 22.06 | 3.98 | 65.0  | ± 9.6 % |
|           |                                            | Y | 8.20 | 78.76 | 22.36 |      | 65.0  |         |
|           |                                            | Z | 8.27 | 78.34 | 22.17 |      | 65.0  |         |
| 10154-CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)    | X | 2.19 | 68.34 | 15.77 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.13 | 68.58 | 15.88 |      | 150.0 |         |
|           |                                            | Z | 2.15 | 68.43 | 15.80 |      | 150.0 |         |
| 10155-CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)  | X | 2.54 | 67.61 | 15.66 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.49 | 67.93 | 15.66 |      | 150.0 |         |
|           |                                            | Z | 2.51 | 67.76 | 15.67 |      | 150.0 |         |
| 10156-CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)     | X | 1.75 | 67.70 | 14.83 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 1.67 | 67.86 | 14.67 |      | 150.0 |         |
|           |                                            | Z | 1.70 | 67.75 | 14.73 |      | 150.0 |         |
| 10157-CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)   | X | 2.01 | 66.49 | 13.77 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 1.89 | 66.41 | 13.28 |      | 150.0 |         |
|           |                                            | Z | 1.95 | 66.44 | 13.53 |      | 150.0 |         |
| 10158-CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)  | X | 2.70 | 67.82 | 15.85 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.64 | 68.13 | 15.83 |      | 150.0 |         |
|           |                                            | Z | 2.67 | 67.98 | 15.86 |      | 150.0 |         |
| 10159-CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)   | X | 2.11 | 66.90 | 14.04 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 1.98 | 66.74 | 13.50 |      | 150.0 |         |
|           |                                            | Z | 2.04 | 66.83 | 13.79 |      | 150.0 |         |
| 10160-CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)    | X | 2.69 | 68.21 | 15.87 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.64 | 68.50 | 16.02 |      | 150.0 |         |
|           |                                            | Z | 2.66 | 68.34 | 15.93 |      | 150.0 |         |
| 10161-CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)  | X | 2.88 | 67.04 | 15.53 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.82 | 67.25 | 15.56 |      | 150.0 |         |
|           |                                            | Z | 2.84 | 67.11 | 15.53 |      | 150.0 |         |
| 10162-CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)  | X | 2.99 | 67.17 | 15.64 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.93 | 67.43 | 15.68 |      | 150.0 |         |
|           |                                            | Z | 2.96 | 67.27 | 15.66 |      | 150.0 |         |
| 10166-CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)   | X | 3.67 | 69.76 | 19.07 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.59 | 70.61 | 19.72 |      | 150.0 |         |
|           |                                            | Z | 3.64 | 70.17 | 19.36 |      | 150.0 |         |
| 10167-CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | X | 4.60 | 72.78 | 19.56 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.59 | 74.59 | 20.58 |      | 150.0 |         |
|           |                                            | Z | 4.60 | 73.54 | 19.97 |      | 150.0 |         |

|           |                                            |   |        |        |       |      |       |         |
|-----------|--------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10168-CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | X | 5.10   | 75.00  | 20.86 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 5.17   | 77.15  | 22.00 |      | 150.0 |         |
|           |                                            | Z | 5.18   | 76.08  | 21.41 |      | 150.0 |         |
| 10169-CAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)      | X | 3.14   | 69.82  | 19.09 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.99   | 70.11  | 19.57 |      | 150.0 |         |
|           |                                            | Z | 3.08   | 69.99  | 19.30 |      | 150.0 |         |
| 10170-CAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)    | X | 4.48   | 76.11  | 21.47 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.42   | 77.92  | 22.61 |      | 150.0 |         |
|           |                                            | Z | 4.51   | 77.09  | 22.03 |      | 150.0 |         |
| 10171-AAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)    | X | 3.64   | 71.74  | 18.65 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.56   | 73.31  | 19.70 |      | 150.0 |         |
|           |                                            | Z | 3.59   | 72.29  | 19.01 |      | 150.0 |         |
| 10172-CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)      | X | 21.10  | 104.74 | 32.18 | 6.02 | 65.0  | ± 9.6 % |
|           |                                            | Y | 44.31  | 124.23 | 38.59 |      | 65.0  |         |
|           |                                            | Z | 24.87  | 109.58 | 33.89 |      | 65.0  |         |
| 10173-CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)    | X | 37.36  | 109.91 | 31.76 | 6.02 | 65.0  | ± 9.6 % |
|           |                                            | Y | 100.00 | 131.53 | 37.83 |      | 65.0  |         |
|           |                                            | Z | 66.45  | 121.49 | 34.95 |      | 65.0  |         |
| 10174-CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)    | X | 28.71  | 103.81 | 29.50 | 6.02 | 65.0  | ± 9.6 % |
|           |                                            | Y | 93.12  | 128.22 | 36.43 |      | 65.0  |         |
|           |                                            | Z | 36.57  | 109.34 | 31.20 |      | 65.0  |         |
| 10175-CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)      | X | 3.10   | 69.50  | 18.83 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.96   | 69.84  | 19.35 |      | 150.0 |         |
|           |                                            | Z | 3.04   | 69.66  | 19.04 |      | 150.0 |         |
| 10176-CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)    | X | 4.49   | 76.13  | 21.48 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.43   | 77.95  | 22.63 |      | 150.0 |         |
|           |                                            | Z | 4.52   | 77.11  | 22.04 |      | 150.0 |         |
| 10177-CAG | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)       | X | 3.13   | 69.65  | 18.93 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.98   | 69.97  | 19.42 |      | 150.0 |         |
|           |                                            | Z | 3.07   | 69.81  | 19.14 |      | 150.0 |         |
| 10178-CAE | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)     | X | 4.43   | 75.88  | 21.35 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.39   | 77.75  | 22.52 |      | 150.0 |         |
|           |                                            | Z | 4.47   | 76.86  | 21.91 |      | 150.0 |         |
| 10179-CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)    | X | 4.01   | 73.75  | 19.90 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.96   | 75.54  | 21.04 |      | 150.0 |         |
|           |                                            | Z | 4.01   | 74.52  | 20.37 |      | 150.0 |         |
| 10180-CAE | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)     | X | 3.63   | 71.66  | 18.60 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.55   | 73.25  | 19.66 |      | 150.0 |         |
|           |                                            | Z | 3.59   | 72.21  | 18.96 |      | 150.0 |         |
| 10181-CAD | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)      | X | 3.13   | 69.64  | 18.92 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.98   | 69.95  | 19.42 |      | 150.0 |         |
|           |                                            | Z | 3.06   | 69.80  | 19.13 |      | 150.0 |         |
| 10182-CAD | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)    | X | 4.42   | 75.86  | 21.34 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.38   | 77.72  | 22.51 |      | 150.0 |         |
|           |                                            | Z | 4.46   | 76.83  | 21.90 |      | 150.0 |         |
| 10183-AAC | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)    | X | 3.62   | 71.63  | 18.59 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.55   | 73.22  | 19.65 |      | 150.0 |         |
|           |                                            | Z | 3.58   | 72.19  | 18.94 |      | 150.0 |         |

|           |                                               |   |      |       |       |      |       |         |
|-----------|-----------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10184-CAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)          | X | 3.14 | 69.68 | 18.95 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 2.99 | 69.99 | 19.44 |      | 150.0 |         |
|           |                                               | Z | 3.07 | 69.84 | 19.16 |      | 150.0 |         |
| 10185-CAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)        | X | 4.45 | 75.93 | 21.38 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.40 | 77.80 | 22.55 |      | 150.0 |         |
|           |                                               | Z | 4.48 | 76.92 | 21.94 |      | 150.0 |         |
| 10186-AAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)        | X | 3.64 | 71.70 | 18.62 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 3.56 | 73.30 | 19.69 |      | 150.0 |         |
|           |                                               | Z | 3.60 | 72.26 | 18.98 |      | 150.0 |         |
| 10187-CAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)        | X | 3.15 | 69.73 | 19.01 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 3.00 | 70.06 | 19.51 |      | 150.0 |         |
|           |                                               | Z | 3.08 | 69.90 | 19.22 |      | 150.0 |         |
| 10188-CAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)      | X | 4.60 | 76.65 | 21.77 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.55 | 78.49 | 22.93 |      | 150.0 |         |
|           |                                               | Z | 4.65 | 77.69 | 22.36 |      | 150.0 |         |
| 10189-AAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)      | X | 3.72 | 72.15 | 18.90 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 3.65 | 73.76 | 19.97 |      | 150.0 |         |
|           |                                               | Z | 3.69 | 72.74 | 19.28 |      | 150.0 |         |
| 10193-CAC | IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)  | X | 4.52 | 66.58 | 16.02 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.45 | 66.79 | 16.05 |      | 150.0 |         |
|           |                                               | Z | 4.48 | 66.63 | 16.03 |      | 150.0 |         |
| 10194-CAC | IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM) | X | 4.70 | 66.91 | 16.15 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.60 | 67.08 | 16.18 |      | 150.0 |         |
|           |                                               | Z | 4.65 | 66.95 | 16.16 |      | 150.0 |         |
| 10195-CAC | IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM) | X | 4.74 | 66.94 | 16.17 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.65 | 67.11 | 16.20 |      | 150.0 |         |
|           |                                               | Z | 4.69 | 66.98 | 16.18 |      | 150.0 |         |
| 10196-CAC | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)       | X | 4.53 | 66.65 | 16.05 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.44 | 66.83 | 16.06 |      | 150.0 |         |
|           |                                               | Z | 4.48 | 66.69 | 16.05 |      | 150.0 |         |
| 10197-CAC | IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)      | X | 4.72 | 66.93 | 16.16 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.62 | 67.10 | 16.19 |      | 150.0 |         |
|           |                                               | Z | 4.66 | 66.97 | 16.17 |      | 150.0 |         |
| 10198-CAC | IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)      | X | 4.75 | 66.96 | 16.18 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.64 | 67.13 | 16.21 |      | 150.0 |         |
|           |                                               | Z | 4.69 | 67.00 | 16.19 |      | 150.0 |         |
| 10219-CAC | IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)       | X | 4.48 | 66.66 | 16.00 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.39 | 66.84 | 16.01 |      | 150.0 |         |
|           |                                               | Z | 4.43 | 66.70 | 16.00 |      | 150.0 |         |
| 10220-CAC | IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)    | X | 4.71 | 66.91 | 16.16 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.61 | 67.06 | 16.18 |      | 150.0 |         |
|           |                                               | Z | 4.66 | 66.94 | 16.16 |      | 150.0 |         |
| 10221-CAC | IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)    | X | 4.76 | 66.89 | 16.17 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.65 | 67.06 | 16.20 |      | 150.0 |         |
|           |                                               | Z | 4.70 | 66.93 | 16.18 |      | 150.0 |         |
| 10222-CAC | IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)        | X | 5.08 | 67.11 | 16.29 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 5.00 | 67.21 | 16.33 |      | 150.0 |         |
|           |                                               | Z | 5.03 | 67.12 | 16.30 |      | 150.0 |         |

|           |                                           |   |        |        |       |      |       |         |
|-----------|-------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10223-CAC | IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)  | X | 5.40   | 67.34  | 16.44 | 0.00 | 150.0 | ± 9.6 % |
|           |                                           | Y | 5.30   | 67.47  | 16.48 |      | 150.0 |         |
|           |                                           | Z | 5.35   | 67.37  | 16.45 |      | 150.0 |         |
| 10224-CAC | IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM) | X | 5.12   | 67.22  | 16.27 | 0.00 | 150.0 | ± 9.6 % |
|           |                                           | Y | 5.04   | 67.32  | 16.31 |      | 150.0 |         |
|           |                                           | Z | 5.08   | 67.23  | 16.28 |      | 150.0 |         |
| 10225-CAB | UMTS-FDD (HSPA+)                          | X | 2.77   | 65.87  | 15.07 | 0.00 | 150.0 | ± 9.6 % |
|           |                                           | Y | 2.71   | 66.11  | 14.95 |      | 150.0 |         |
|           |                                           | Z | 2.73   | 65.95  | 15.01 |      | 150.0 |         |
| 10226-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)  | X | 40.90  | 111.69 | 32.33 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 100.00 | 131.74 | 37.97 |      | 65.0  |         |
|           |                                           | Z | 76.08  | 124.13 | 35.71 |      | 65.0  |         |
| 10227-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)  | X | 32.04  | 105.79 | 30.14 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 100.00 | 129.20 | 36.63 |      | 65.0  |         |
|           |                                           | Z | 56.03  | 116.66 | 33.17 |      | 65.0  |         |
| 10228-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)    | X | 32.49  | 113.40 | 34.73 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 63.93  | 131.79 | 40.55 |      | 65.0  |         |
|           |                                           | Z | 42.68  | 120.45 | 36.94 |      | 65.0  |         |
| 10229-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)    | X | 37.48  | 109.96 | 31.78 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 100.00 | 131.51 | 37.84 |      | 65.0  |         |
|           |                                           | Z | 66.68  | 121.54 | 34.97 |      | 65.0  |         |
| 10230-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)    | X | 29.78  | 104.42 | 29.68 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 100.00 | 129.07 | 36.54 |      | 65.0  |         |
|           |                                           | Z | 50.21  | 114.61 | 32.57 |      | 65.0  |         |
| 10231-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)      | X | 30.12  | 111.79 | 34.20 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 57.30  | 129.38 | 39.87 |      | 65.0  |         |
|           |                                           | Z | 38.78  | 118.39 | 36.30 |      | 65.0  |         |
| 10232-CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)    | X | 37.48  | 109.97 | 31.78 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 100.00 | 131.53 | 37.84 |      | 65.0  |         |
|           |                                           | Z | 66.72  | 121.56 | 34.98 |      | 65.0  |         |
| 10233-CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)    | X | 29.77  | 104.42 | 29.68 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 100.00 | 129.09 | 36.55 |      | 65.0  |         |
|           |                                           | Z | 50.19  | 114.62 | 32.57 |      | 65.0  |         |
| 10234-CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)      | X | 28.05  | 110.17 | 33.63 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 51.99  | 127.09 | 39.16 |      | 65.0  |         |
|           |                                           | Z | 35.54  | 116.41 | 35.65 |      | 65.0  |         |
| 10235-CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)   | X | 37.64  | 110.05 | 31.80 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 100.00 | 131.54 | 37.84 |      | 65.0  |         |
|           |                                           | Z | 67.18  | 121.70 | 35.01 |      | 65.0  |         |
| 10236-CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)   | X | 30.09  | 104.58 | 29.72 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 100.00 | 129.03 | 36.52 |      | 65.0  |         |
|           |                                           | Z | 50.96  | 114.84 | 32.62 |      | 65.0  |         |
| 10237-CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)     | X | 30.42  | 112.00 | 34.26 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 58.39  | 129.80 | 39.98 |      | 65.0  |         |
|           |                                           | Z | 39.25  | 118.66 | 36.38 |      | 65.0  |         |
| 10238-CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)   | X | 37.48  | 109.98 | 31.78 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 100.00 | 131.54 | 37.84 |      | 65.0  |         |
|           |                                           | Z | 66.77  | 121.59 | 34.98 |      | 65.0  |         |

|           |                                            |   |        |        |       |      |      |         |
|-----------|--------------------------------------------|---|--------|--------|-------|------|------|---------|
| 10239-CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)    | X | 29.75  | 104.43 | 29.68 | 6.02 | 65.0 | ± 9.6 % |
|           |                                            | Y | 100.00 | 129.11 | 36.55 |      | 65.0 |         |
|           |                                            | Z | 50.17  | 114.63 | 32.57 |      | 65.0 |         |
| 10240-CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)      | X | 30.30  | 111.94 | 34.24 | 6.02 | 65.0 | ± 9.6 % |
|           |                                            | Y | 58.14  | 129.72 | 39.96 |      | 65.0 |         |
|           |                                            | Z | 39.09  | 118.59 | 36.36 |      | 65.0 |         |
| 10241-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | X | 11.80  | 86.80  | 27.35 | 6.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 13.67  | 92.53  | 29.81 |      | 65.0 |         |
|           |                                            | Z | 12.27  | 88.56  | 28.08 |      | 65.0 |         |
| 10242-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | X | 10.15  | 83.59  | 26.03 | 6.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 12.26  | 90.20  | 28.90 |      | 65.0 |         |
|           |                                            | Z | 10.49  | 85.23  | 26.75 |      | 65.0 |         |
| 10243-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)   | X | 8.15   | 80.45  | 25.67 | 6.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 9.07   | 85.16  | 28.03 |      | 65.0 |         |
|           |                                            | Z | 8.20   | 81.43  | 26.18 |      | 65.0 |         |
| 10244-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)   | X | 8.77   | 79.58  | 20.12 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 8.68   | 79.98  | 19.73 |      | 65.0 |         |
|           |                                            | Z | 8.93   | 80.10  | 20.07 |      | 65.0 |         |
| 10245-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)   | X | 8.56   | 78.94  | 19.83 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 8.27   | 79.00  | 19.30 |      | 65.0 |         |
|           |                                            | Z | 8.60   | 79.28  | 19.71 |      | 65.0 |         |
| 10246-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)     | X | 9.05   | 82.96  | 21.42 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 8.67   | 82.79  | 20.89 |      | 65.0 |         |
|           |                                            | Z | 9.07   | 83.18  | 21.25 |      | 65.0 |         |
| 10247-CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)   | X | 7.31   | 77.47  | 20.01 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 6.88   | 77.10  | 19.42 |      | 65.0 |         |
|           |                                            | Z | 7.16   | 77.42  | 19.78 |      | 65.0 |         |
| 10248-CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)   | X | 7.23   | 76.85  | 19.75 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 6.75   | 76.40  | 19.13 |      | 65.0 |         |
|           |                                            | Z | 7.04   | 76.72  | 19.48 |      | 65.0 |         |
| 10249-CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)     | X | 10.55  | 85.88  | 23.24 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 11.23  | 87.71  | 23.62 |      | 65.0 |         |
|           |                                            | Z | 11.08  | 87.02  | 23.49 |      | 65.0 |         |
| 10250-CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)  | X | 8.37   | 79.97  | 22.44 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 8.25   | 80.64  | 22.58 |      | 65.0 |         |
|           |                                            | Z | 8.37   | 80.40  | 22.54 |      | 65.0 |         |
| 10251-CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)  | X | 7.79   | 77.55  | 21.17 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 7.62   | 78.12  | 21.26 |      | 65.0 |         |
|           |                                            | Z | 7.71   | 77.78  | 21.18 |      | 65.0 |         |
| 10252-CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)    | X | 10.26  | 85.03  | 23.77 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 11.07  | 87.53  | 24.67 |      | 65.0 |         |
|           |                                            | Z | 10.72  | 86.30  | 24.20 |      | 65.0 |         |
| 10253-CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)  | X | 7.69   | 76.53  | 21.09 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 7.57   | 77.22  | 21.35 |      | 65.0 |         |
|           |                                            | Z | 7.61   | 76.75  | 21.15 |      | 65.0 |         |
| 10254-CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)  | X | 8.11   | 77.42  | 21.76 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 7.99   | 78.11  | 22.01 |      | 65.0 |         |
|           |                                            | Z | 8.04   | 77.70  | 21.84 |      | 65.0 |         |

|           |                                             |   |       |       |       |      |      |         |
|-----------|---------------------------------------------|---|-------|-------|-------|------|------|---------|
| 10255-CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)     | X | 8.87  | 80.90 | 22.51 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 9.18  | 82.66 | 23.26 |      | 65.0 |         |
|           |                                             | Z | 9.01  | 81.69 | 22.82 |      | 65.0 |         |
| 10256-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM) | X | 7.19  | 76.04 | 17.83 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 6.37  | 74.72 | 16.60 |      | 65.0 |         |
|           |                                             | Z | 6.91  | 75.63 | 17.34 |      | 65.0 |         |
| 10257-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) | X | 6.95  | 75.20 | 17.41 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 6.01  | 73.59 | 16.03 |      | 65.0 |         |
|           |                                             | Z | 6.60  | 74.62 | 16.84 |      | 65.0 |         |
| 10258-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)   | X | 7.08  | 78.57 | 19.08 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 5.96  | 76.36 | 17.58 |      | 65.0 |         |
|           |                                             | Z | 6.63  | 77.70 | 18.41 |      | 65.0 |         |
| 10259-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)   | X | 7.72  | 78.37 | 20.87 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 7.43  | 78.48 | 20.58 |      | 65.0 |         |
|           |                                             | Z | 7.64  | 78.54 | 20.77 |      | 65.0 |         |
| 10260-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)   | X | 7.71  | 78.04 | 20.75 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 7.37  | 78.04 | 20.41 |      | 65.0 |         |
|           |                                             | Z | 7.60  | 78.14 | 20.63 |      | 65.0 |         |
| 10261-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)     | X | 9.91  | 84.71 | 23.20 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 10.51 | 86.66 | 23.72 |      | 65.0 |         |
|           |                                             | Z | 10.31 | 85.78 | 23.47 |      | 65.0 |         |
| 10262-CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)   | X | 8.35  | 79.91 | 22.40 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.23  | 80.57 | 22.53 |      | 65.0 |         |
|           |                                             | Z | 8.35  | 80.33 | 22.49 |      | 65.0 |         |
| 10263-CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)   | X | 7.78  | 77.53 | 21.17 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 7.61  | 78.09 | 21.25 |      | 65.0 |         |
|           |                                             | Z | 7.70  | 77.76 | 21.18 |      | 65.0 |         |
| 10264-CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)     | X | 10.16 | 84.83 | 23.68 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 10.94 | 87.30 | 24.57 |      | 65.0 |         |
|           |                                             | Z | 10.60 | 86.08 | 24.10 |      | 65.0 |         |
| 10265-CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)  | X | 7.89  | 77.12 | 21.33 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 7.75  | 77.78 | 21.62 |      | 65.0 |         |
|           |                                             | Z | 7.80  | 77.33 | 21.40 |      | 65.0 |         |
| 10266-CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)  | X | 8.32  | 78.04 | 22.05 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.20  | 78.75 | 22.36 |      | 65.0 |         |
|           |                                             | Z | 8.26  | 78.33 | 22.16 |      | 65.0 |         |
| 10267-CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)    | X | 9.19  | 81.29 | 22.44 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 9.53  | 83.07 | 23.22 |      | 65.0 |         |
|           |                                             | Z | 9.36  | 82.10 | 22.77 |      | 65.0 |         |
| 10268-CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)  | X | 8.37  | 76.65 | 21.54 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.20  | 77.22 | 21.85 |      | 65.0 |         |
|           |                                             | Z | 8.27  | 76.83 | 21.63 |      | 65.0 |         |
| 10269-CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)  | X | 8.29  | 76.22 | 21.43 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.13  | 76.76 | 21.72 |      | 65.0 |         |
|           |                                             | Z | 8.20  | 76.38 | 21.51 |      | 65.0 |         |
| 10270-CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)    | X | 8.55  | 78.25 | 21.44 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.58  | 79.32 | 21.98 |      | 65.0 |         |
|           |                                             | Z | 8.56  | 78.72 | 21.66 |      | 65.0 |         |



|           |                                                                    |   |       |       |       |      |       |         |
|-----------|--------------------------------------------------------------------|---|-------|-------|-------|------|-------|---------|
| 10274-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)                          | X | 2.53  | 66.08 | 14.88 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 2.52  | 66.54 | 14.91 |      | 150.0 |         |
|           |                                                                    | Z | 2.51  | 66.24 | 14.87 |      | 150.0 |         |
| 10275-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)                           | X | 1.51  | 66.90 | 14.72 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.52  | 67.44 | 14.98 |      | 150.0 |         |
|           |                                                                    | Z | 1.50  | 67.06 | 14.77 |      | 150.0 |         |
| 10277-CAA | PHS (QPSK)                                                         | X | 4.49  | 67.07 | 11.86 | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 3.76  | 65.67 | 10.51 |      | 50.0  |         |
|           |                                                                    | Z | 4.09  | 66.15 | 11.03 |      | 50.0  |         |
| 10278-CAA | PHS (QPSK, BW 884MHz, Rolloff 0.5)                                 | X | 8.37  | 78.55 | 19.37 | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 7.19  | 76.56 | 17.89 |      | 50.0  |         |
|           |                                                                    | Z | 7.75  | 77.39 | 18.52 |      | 50.0  |         |
| 10279-CAA | PHS (QPSK, BW 884MHz, Rolloff 0.38)                                | X | 8.51  | 78.75 | 19.47 | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 7.31  | 76.76 | 18.01 |      | 50.0  |         |
|           |                                                                    | Z | 7.88  | 77.58 | 18.63 |      | 50.0  |         |
| 10290-AAB | CDMA2000, RC1, SO55, Full Rate                                     | X | 1.28  | 66.85 | 12.83 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.15  | 66.36 | 12.07 |      | 150.0 |         |
|           |                                                                    | Z | 1.21  | 66.57 | 12.40 |      | 150.0 |         |
| 10291-AAB | CDMA2000, RC3, SO55, Full Rate                                     | X | 0.73  | 64.15 | 11.20 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 0.69  | 64.04 | 10.71 |      | 150.0 |         |
|           |                                                                    | Z | 0.69  | 63.98 | 10.82 |      | 150.0 |         |
| 10292-AAB | CDMA2000, RC3, SO32, Full Rate                                     | X | 0.85  | 66.79 | 12.92 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 0.83  | 67.15 | 12.67 |      | 150.0 |         |
|           |                                                                    | Z | 0.82  | 66.81 | 12.63 |      | 150.0 |         |
| 10293-AAB | CDMA2000, RC3, SO3, Full Rate                                      | X | 1.14  | 70.77 | 15.25 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.22  | 72.07 | 15.35 |      | 150.0 |         |
|           |                                                                    | Z | 1.16  | 71.38 | 15.20 |      | 150.0 |         |
| 10295-AAB | CDMA2000, RC1, SO3, 1/8th Rate 25 fr.                              | X | 11.92 | 86.64 | 24.71 | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 15.63 | 91.98 | 26.09 |      | 50.0  |         |
|           |                                                                    | Z | 13.21 | 88.61 | 25.13 |      | 50.0  |         |
| 10297-AAC | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)                            | X | 2.66  | 69.01 | 16.01 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 2.60  | 69.22 | 16.21 |      | 150.0 |         |
|           |                                                                    | Z | 2.62  | 69.08 | 16.08 |      | 150.0 |         |
| 10298-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)                             | X | 1.46  | 66.51 | 13.33 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.32  | 65.99 | 12.56 |      | 150.0 |         |
|           |                                                                    | Z | 1.39  | 66.26 | 12.94 |      | 150.0 |         |
| 10299-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)                           | X | 2.70  | 69.70 | 14.37 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 2.67  | 70.31 | 14.00 |      | 150.0 |         |
|           |                                                                    | Z | 2.72  | 70.11 | 14.27 |      | 150.0 |         |
| 10300-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)                           | X | 2.09  | 65.56 | 11.69 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.84  | 65.02 | 10.77 |      | 150.0 |         |
|           |                                                                    | Z | 1.98  | 65.35 | 11.29 |      | 150.0 |         |
| 10301-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC)                 | X | 5.46  | 67.87 | 18.50 | 4.17 | 80.0  | ± 9.6 % |
|           |                                                                    | Y | 5.32  | 68.03 | 18.43 |      | 80.0  |         |
|           |                                                                    | Z | 5.39  | 67.94 | 18.48 |      | 80.0  |         |
| 10302-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols) | X | 5.85  | 67.98 | 18.95 | 4.96 | 80.0  | ± 9.6 % |
|           |                                                                    | Y | 5.80  | 68.69 | 19.24 |      | 80.0  |         |
|           |                                                                    | Z | 5.75  | 67.96 | 18.88 |      | 80.0  |         |

|           |                                                                     |   |       |       |       |       |       |         |
|-----------|---------------------------------------------------------------------|---|-------|-------|-------|-------|-------|---------|
| 10303-AAA | IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)                 | X | 5.66  | 67.92 | 18.92 | 4.96  | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 5.61  | 68.61 | 19.19 |       | 80.0  |         |
|           |                                                                     | Z | 5.56  | 67.86 | 18.83 |       | 80.0  |         |
| 10304-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)                 | X | 5.35  | 67.35 | 18.18 | 4.17  | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 5.30  | 68.04 | 18.43 |       | 80.0  |         |
|           |                                                                     | Z | 5.26  | 67.36 | 18.12 |       | 80.0  |         |
| 10305-AAA | IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols)    | X | 7.05  | 76.99 | 23.82 | 6.02  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 7.19  | 78.32 | 24.16 |       | 50.0  |         |
|           |                                                                     | Z | 6.80  | 76.50 | 23.43 |       | 50.0  |         |
| 10306-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols)    | X | 5.82  | 69.84 | 20.44 | 6.02  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 5.84  | 70.99 | 20.86 |       | 50.0  |         |
|           |                                                                     | Z | 6.02  | 71.90 | 21.62 |       | 50.0  |         |
| 10307-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols)     | X | 6.31  | 73.07 | 22.13 | 6.02  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 5.83  | 71.38 | 20.88 |       | 50.0  |         |
|           |                                                                     | Z | 6.11  | 72.72 | 21.84 |       | 50.0  |         |
| 10308-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)                | X | 6.39  | 73.64 | 22.41 | 6.02  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 5.90  | 71.88 | 21.13 |       | 50.0  |         |
|           |                                                                     | Z | 6.20  | 73.31 | 22.13 |       | 50.0  |         |
| 10309-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols) | X | 5.91  | 70.12 | 20.60 | 6.02  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 5.91  | 71.23 | 21.02 |       | 50.0  |         |
|           |                                                                     | Z | 6.11  | 72.19 | 21.79 |       | 50.0  |         |
| 10310-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols)  | X | 6.22  | 72.50 | 21.95 | 6.02  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 5.84  | 71.19 | 20.88 |       | 50.0  |         |
|           |                                                                     | Z | 6.05  | 72.25 | 21.70 |       | 50.0  |         |
| 10311-AAC | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)                            | X | 3.00  | 68.33 | 15.71 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 2.96  | 68.52 | 15.89 |       | 150.0 |         |
|           |                                                                     | Z | 2.97  | 68.38 | 15.77 |       | 150.0 |         |
| 10313-AAA | iDEN 1:3                                                            | X | 6.99  | 77.76 | 18.02 | 6.99  | 70.0  | ± 9.6 % |
|           |                                                                     | Y | 8.29  | 81.34 | 19.42 |       | 70.0  |         |
|           |                                                                     | Z | 7.24  | 78.54 | 18.23 |       | 70.0  |         |
| 10314-AAA | iDEN 1:6                                                            | X | 10.49 | 86.54 | 23.63 | 10.00 | 30.0  | ± 9.6 % |
|           |                                                                     | Y | 12.83 | 91.81 | 25.63 |       | 30.0  |         |
|           |                                                                     | Z | 11.85 | 89.04 | 24.41 |       | 30.0  |         |
| 10315-AAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)           | X | 1.08  | 63.85 | 14.84 | 0.17  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 1.11  | 64.19 | 15.04 |       | 150.0 |         |
|           |                                                                     | Z | 1.08  | 63.97 | 14.91 |       | 150.0 |         |
| 10316-AAB | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)       | X | 4.62  | 66.77 | 16.25 | 0.17  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.54  | 66.97 | 16.29 |       | 150.0 |         |
|           |                                                                     | Z | 4.57  | 66.82 | 16.26 |       | 150.0 |         |
| 10317-AAC | IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)             | X | 4.62  | 66.77 | 16.25 | 0.17  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.54  | 66.97 | 16.29 |       | 150.0 |         |
|           |                                                                     | Z | 4.57  | 66.82 | 16.26 |       | 150.0 |         |
| 10400-AAD | IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)                 | X | 4.70  | 66.97 | 16.15 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.59  | 67.15 | 16.19 |       | 150.0 |         |
|           |                                                                     | Z | 4.64  | 67.01 | 16.16 |       | 150.0 |         |
| 10401-AAD | IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)                 | X | 5.41  | 67.24 | 16.37 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 5.32  | 67.38 | 16.42 |       | 150.0 |         |
|           |                                                                     | Z | 5.38  | 67.33 | 16.41 |       | 150.0 |         |

|           |                                                                                 |   |        |        |       |      |       |         |
|-----------|---------------------------------------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10402-AAD | IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)                             | X | 5.66   | 67.55  | 16.37 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 5.56   | 67.58  | 16.37 |      | 150.0 |         |
|           |                                                                                 | Z | 5.60   | 67.52  | 16.36 |      | 150.0 |         |
| 10403-AAB | CDMA2000 (1xEV-DO, Rev. 0)                                                      | X | 1.28   | 66.85  | 12.83 | 0.00 | 115.0 | ± 9.6 % |
|           |                                                                                 | Y | 1.15   | 66.36  | 12.07 |      | 115.0 |         |
|           |                                                                                 | Z | 1.21   | 66.57  | 12.40 |      | 115.0 |         |
| 10404-AAB | CDMA2000 (1xEV-DO, Rev. A)                                                      | X | 1.28   | 66.85  | 12.83 | 0.00 | 115.0 | ± 9.6 % |
|           |                                                                                 | Y | 1.15   | 66.36  | 12.07 |      | 115.0 |         |
|           |                                                                                 | Z | 1.21   | 66.57  | 12.40 |      | 115.0 |         |
| 10406-AAB | CDMA2000, RC3, SO32, SCH0, Full Rate                                            | X | 31.97  | 105.65 | 26.52 | 0.00 | 100.0 | ± 9.6 % |
|           |                                                                                 | Y | 100.00 | 119.11 | 28.78 |      | 100.0 |         |
|           |                                                                                 | Z | 100.00 | 120.25 | 29.60 |      | 100.0 |         |
| 10410-AAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9, Subframe Conf=4) | X | 100.00 | 119.16 | 29.68 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                                 | Y | 100.00 | 122.81 | 30.98 |      | 80.0  |         |
|           |                                                                                 | Z | 100.00 | 120.19 | 29.97 |      | 80.0  |         |
| 10415-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)                       | X | 0.96   | 62.46  | 13.98 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 0.99   | 62.90  | 14.23 |      | 150.0 |         |
|           |                                                                                 | Z | 0.95   | 62.59  | 14.06 |      | 150.0 |         |
| 10416-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)                   | X | 4.53   | 66.62  | 16.09 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 4.45   | 66.83  | 16.13 |      | 150.0 |         |
|           |                                                                                 | Z | 4.48   | 66.68  | 16.10 |      | 150.0 |         |
| 10417-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)                       | X | 4.53   | 66.62  | 16.09 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 4.45   | 66.83  | 16.13 |      | 150.0 |         |
|           |                                                                                 | Z | 4.48   | 66.68  | 16.10 |      | 150.0 |         |
| 10418-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)   | X | 4.51   | 66.76  | 16.09 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 4.44   | 67.00  | 16.16 |      | 150.0 |         |
|           |                                                                                 | Z | 4.47   | 66.83  | 16.12 |      | 150.0 |         |
| 10419-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble)  | X | 4.54   | 66.72  | 16.10 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 4.46   | 66.94  | 16.15 |      | 150.0 |         |
|           |                                                                                 | Z | 4.49   | 66.78  | 16.12 |      | 150.0 |         |
| 10422-AAB | IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)                                    | X | 4.66   | 66.73  | 16.13 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 4.57   | 66.94  | 16.17 |      | 150.0 |         |
|           |                                                                                 | Z | 4.61   | 66.79  | 16.14 |      | 150.0 |         |
| 10423-AAB | IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)                                 | X | 4.83   | 67.07  | 16.25 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 4.72   | 67.22  | 16.28 |      | 150.0 |         |
|           |                                                                                 | Z | 4.77   | 67.10  | 16.25 |      | 150.0 |         |
| 10424-AAB | IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)                                 | X | 4.75   | 67.01  | 16.22 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 4.64   | 67.18  | 16.25 |      | 150.0 |         |
|           |                                                                                 | Z | 4.69   | 67.05  | 16.23 |      | 150.0 |         |
| 10425-AAB | IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)                                     | X | 5.37   | 67.43  | 16.45 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 5.26   | 67.46  | 16.45 |      | 150.0 |         |
|           |                                                                                 | Z | 5.32   | 67.43  | 16.46 |      | 150.0 |         |
| 10426-AAB | IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)                                   | X | 5.37   | 67.44  | 16.46 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 5.28   | 67.55  | 16.49 |      | 150.0 |         |
|           |                                                                                 | Z | 5.33   | 67.49  | 16.49 |      | 150.0 |         |

|           |                                                                |   |        |        |       |      |       |         |
|-----------|----------------------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10427-AAB | IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)                 | X | 5.38   | 67.41  | 16.44 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 5.27   | 67.46  | 16.44 |      | 150.0 |         |
|           |                                                                | Z | 5.33   | 67.43  | 16.45 |      | 150.0 |         |
| 10430-AAB | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)                               | X | 4.17   | 70.27  | 17.81 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.03   | 70.48  | 17.58 |      | 150.0 |         |
|           |                                                                | Z | 4.14   | 70.57  | 17.85 |      | 150.0 |         |
| 10431-AAB | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)                              | X | 4.21   | 67.11  | 16.05 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.09   | 67.33  | 16.03 |      | 150.0 |         |
|           |                                                                | Z | 4.15   | 67.18  | 16.04 |      | 150.0 |         |
| 10432-AAB | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)                              | X | 4.51   | 67.03  | 16.15 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.40   | 67.23  | 16.17 |      | 150.0 |         |
|           |                                                                | Z | 4.46   | 67.08  | 16.15 |      | 150.0 |         |
| 10433-AAB | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)                              | X | 4.76   | 67.04  | 16.24 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.66   | 67.21  | 16.27 |      | 150.0 |         |
|           |                                                                | Z | 4.71   | 67.08  | 16.24 |      | 150.0 |         |
| 10434-AAA | W-CDMA (BS Test Model 1, 64 DPCH)                              | X | 4.23   | 70.97  | 17.72 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.07   | 71.14  | 17.40 |      | 150.0 |         |
|           |                                                                | Z | 4.21   | 71.31  | 17.74 |      | 150.0 |         |
| 10435-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 118.98 | 29.60 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                | Y | 100.00 | 122.59 | 30.87 |      | 80.0  |         |
|           |                                                                | Z | 100.00 | 119.99 | 29.88 |      | 80.0  |         |
| 10447-AAB | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)                 | X | 3.49   | 66.99  | 15.32 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 3.34   | 67.16  | 15.09 |      | 150.0 |         |
|           |                                                                | Z | 3.41   | 67.04  | 15.22 |      | 150.0 |         |
| 10448-AAB | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)                | X | 4.04   | 66.88  | 15.90 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 3.94   | 67.12  | 15.89 |      | 150.0 |         |
|           |                                                                | Z | 3.99   | 66.95  | 15.89 |      | 150.0 |         |
| 10449-AAB | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)                | X | 4.32   | 66.84  | 16.03 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.23   | 67.04  | 16.06 |      | 150.0 |         |
|           |                                                                | Z | 4.27   | 66.90  | 16.04 |      | 150.0 |         |
| 10450-AAB | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)                | X | 4.51   | 66.79  | 16.08 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.44   | 66.97  | 16.11 |      | 150.0 |         |
|           |                                                                | Z | 4.47   | 66.83  | 16.09 |      | 150.0 |         |
| 10451-AAA | W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)                | X | 3.37   | 67.12  | 14.92 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 3.19   | 67.13  | 14.54 |      | 150.0 |         |
|           |                                                                | Z | 3.28   | 67.11  | 14.76 |      | 150.0 |         |
| 10456-AAB | IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle)           | X | 6.23   | 67.99  | 16.62 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 6.17   | 68.10  | 16.67 |      | 150.0 |         |
|           |                                                                | Z | 6.19   | 67.99  | 16.63 |      | 150.0 |         |
| 10457-AAA | UMTS-FDD (DC-HSDPA)                                            | X | 3.77   | 65.25  | 15.79 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 3.75   | 65.50  | 15.83 |      | 150.0 |         |
|           |                                                                | Z | 3.75   | 65.32  | 15.80 |      | 150.0 |         |
| 10458-AAA | CDMA2000 (1xEV-DO, Rev. B, 2 carriers)                         | X | 3.87   | 70.16  | 17.10 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 3.71   | 70.34  | 16.66 |      | 150.0 |         |
|           |                                                                | Z | 3.84   | 70.49  | 17.05 |      | 150.0 |         |
| 10459-AAA | CDMA2000 (1xEV-DO, Rev. B, 3 carriers)                         | X | 5.00   | 67.94  | 17.87 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.81   | 68.13  | 17.56 |      | 150.0 |         |
|           |                                                                | Z | 4.96   | 68.23  | 17.89 |      | 150.0 |         |

|           |                                                                   |   |        |        |       |      |       |         |
|-----------|-------------------------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10460-AAA | UMTS-FDD (WCDMA, AMR)                                             | X | 0.79   | 66.34  | 14.61 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                   | Y | 0.84   | 67.16  | 15.15 |      | 150.0 |         |
|           |                                                                   | Z | 0.79   | 66.65  | 14.76 |      | 150.0 |         |
| 10461-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 100.00 | 122.59 | 31.33 | 3.29 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 128.70 | 33.71 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 124.88 | 32.17 |      | 80.0  |         |
| 10462-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 21.46  | 90.49  | 19.92 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 107.87 | 23.85 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 106.49 | 23.49 |      | 80.0  |         |
| 10463-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 5.25   | 74.65  | 14.70 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 19.71  | 88.51  | 18.38 |      | 80.0  |         |
|           |                                                                   | Z | 7.19   | 78.06  | 15.56 |      | 80.0  |         |
| 10464-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 100.00 | 120.34 | 30.14 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 126.35 | 32.46 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 122.50 | 30.92 |      | 80.0  |         |
| 10465-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 11.73  | 83.97  | 18.05 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 107.24 | 23.55 |      | 80.0  |         |
|           |                                                                   | Z | 41.80  | 97.17  | 21.26 |      | 80.0  |         |
| 10466-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 4.09   | 72.04  | 13.74 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 8.97   | 80.87  | 16.24 |      | 80.0  |         |
|           |                                                                   | Z | 4.77   | 73.97  | 14.19 |      | 80.0  |         |
| 10467-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 100.00 | 120.57 | 30.24 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 126.64 | 32.58 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 122.76 | 31.03 |      | 80.0  |         |
| 10468-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 13.52  | 85.52  | 18.51 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 107.47 | 23.65 |      | 80.0  |         |
|           |                                                                   | Z | 60.78  | 101.09 | 22.20 |      | 80.0  |         |
| 10469-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 4.11   | 72.11  | 13.77 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 9.29   | 81.22  | 16.33 |      | 80.0  |         |
|           |                                                                   | Z | 4.83   | 74.11  | 14.24 |      | 80.0  |         |
| 10470-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 100.00 | 120.59 | 30.24 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 126.67 | 32.59 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 122.78 | 31.03 |      | 80.0  |         |
| 10471-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 13.37  | 85.38  | 18.46 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 107.40 | 23.62 |      | 80.0  |         |
|           |                                                                   | Z | 59.33  | 100.79 | 22.11 |      | 80.0  |         |
| 10472-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)  | X | 4.08   | 72.03  | 13.72 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 9.15   | 81.05  | 16.27 |      | 80.0  |         |
|           |                                                                   | Z | 4.78   | 73.98  | 14.18 |      | 80.0  |         |
| 10473-AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 100.00 | 120.56 | 30.23 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 126.64 | 32.58 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 122.75 | 31.02 |      | 80.0  |         |
| 10474-AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 13.19  | 85.24  | 18.42 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 107.40 | 23.61 |      | 80.0  |         |
|           |                                                                   | Z | 57.55  | 100.49 | 22.04 |      | 80.0  |         |
| 10475-AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)  | X | 4.06   | 71.97  | 13.71 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 8.99   | 80.90  | 16.23 |      | 80.0  |         |
|           |                                                                   | Z | 4.73   | 73.90  | 14.15 |      | 80.0  |         |

|           |                                                                     |   |        |        |       |      |      |         |
|-----------|---------------------------------------------------------------------|---|--------|--------|-------|------|------|---------|
| 10477-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)    | X | 11.86  | 84.06  | 18.05 | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 100.00 | 107.19 | 23.51 |      | 80.0 |         |
|           |                                                                     | Z | 43.65  | 97.56  | 21.32 |      | 80.0 |         |
| 10478-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)    | X | 4.02   | 71.87  | 13.66 | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 8.76   | 80.61  | 16.13 |      | 80.0 |         |
|           |                                                                     | Z | 4.66   | 73.74  | 14.09 |      | 80.0 |         |
| 10479-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 14.17  | 93.60  | 25.28 | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 63.86  | 118.32 | 31.85 |      | 80.0 |         |
|           |                                                                     | Z | 30.71  | 105.97 | 28.68 |      | 80.0 |         |
| 10480-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 12.48  | 86.47  | 21.39 | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 53.06  | 106.13 | 26.31 |      | 80.0 |         |
|           |                                                                     | Z | 23.73  | 95.20  | 23.69 |      | 80.0 |         |
| 10481-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 9.79   | 82.49  | 19.78 | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 26.62  | 95.88  | 23.20 |      | 80.0 |         |
|           |                                                                     | Z | 15.46  | 88.60  | 21.40 |      | 80.0 |         |
| 10482-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 4.76   | 76.35  | 18.33 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 4.38   | 75.77  | 17.66 |      | 80.0 |         |
|           |                                                                     | Z | 4.74   | 76.54  | 18.16 |      | 80.0 |         |
| 10483-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 6.86   | 78.09  | 18.71 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 7.58   | 79.80  | 18.72 |      | 80.0 |         |
|           |                                                                     | Z | 7.91   | 80.19  | 19.17 |      | 80.0 |         |
| 10484-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 6.29   | 76.73  | 18.22 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 6.51   | 77.64  | 17.97 |      | 80.0 |         |
|           |                                                                     | Z | 6.95   | 78.27  | 18.51 |      | 80.0 |         |
| 10485-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 5.21   | 77.92  | 19.79 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 5.14   | 78.56  | 19.82 |      | 80.0 |         |
|           |                                                                     | Z | 5.34   | 78.68  | 19.95 |      | 80.0 |         |
| 10486-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 4.30   | 72.12  | 17.19 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 4.02   | 71.85  | 16.65 |      | 80.0 |         |
|           |                                                                     | Z | 4.23   | 72.22  | 17.03 |      | 80.0 |         |
| 10487-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 4.25   | 71.63  | 16.98 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 3.95   | 71.26  | 16.39 |      | 80.0 |         |
|           |                                                                     | Z | 4.16   | 71.66  | 16.79 |      | 80.0 |         |
| 10488-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 5.17   | 76.41  | 19.90 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 5.01   | 76.93  | 20.15 |      | 80.0 |         |
|           |                                                                     | Z | 5.17   | 76.91  | 20.10 |      | 80.0 |         |
| 10489-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 4.47   | 71.61  | 18.14 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 4.30   | 71.84  | 18.12 |      | 80.0 |         |
|           |                                                                     | Z | 4.42   | 71.84  | 18.19 |      | 80.0 |         |
| 10490-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)  | X | 4.53   | 71.33  | 18.05 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 4.36   | 71.56  | 18.01 |      | 80.0 |         |
|           |                                                                     | Z | 4.48   | 71.55  | 18.09 |      | 80.0 |         |
| 10491-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 5.06   | 74.04  | 19.16 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 4.88   | 74.37  | 19.37 |      | 80.0 |         |
|           |                                                                     | Z | 5.01   | 74.33  | 19.30 |      | 80.0 |         |
| 10492-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 4.71   | 70.55  | 18.02 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 4.54   | 70.71  | 18.05 |      | 80.0 |         |
|           |                                                                     | Z | 4.64   | 70.68  | 18.06 |      | 80.0 |         |

|           |                                                                      |   |      |       |       |      |      |         |
|-----------|----------------------------------------------------------------------|---|------|-------|-------|------|------|---------|
| 10493-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 4.76 | 70.36 | 17.96 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 4.58 | 70.52 | 17.98 |      | 80.0 |         |
|           |                                                                      | Z | 4.69 | 70.49 | 18.00 |      | 80.0 |         |
| 10494-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 5.60 | 75.75 | 19.64 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 5.37 | 76.02 | 19.87 |      | 80.0 |         |
|           |                                                                      | Z | 5.56 | 76.06 | 19.81 |      | 80.0 |         |
| 10495-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 4.78 | 71.03 | 18.23 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 4.59 | 71.11 | 18.27 |      | 80.0 |         |
|           |                                                                      | Z | 4.71 | 71.14 | 18.28 |      | 80.0 |         |
| 10496-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 4.83 | 70.65 | 18.12 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 4.64 | 70.74 | 18.15 |      | 80.0 |         |
|           |                                                                      | Z | 4.75 | 70.76 | 18.17 |      | 80.0 |         |
| 10497-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 3.37 | 71.45 | 15.57 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 2.72 | 69.17 | 13.95 |      | 80.0 |         |
|           |                                                                      | Z | 3.09 | 70.50 | 14.83 |      | 80.0 |         |
| 10498-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.40 | 64.81 | 11.76 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 1.75 | 62.03 | 9.60  |      | 80.0 |         |
|           |                                                                      | Z | 2.07 | 63.39 | 10.68 |      | 80.0 |         |
| 10499-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.32 | 64.18 | 11.33 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 1.68 | 61.41 | 9.14  |      | 80.0 |         |
|           |                                                                      | Z | 1.99 | 62.76 | 10.23 |      | 80.0 |         |
| 10500-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 5.05 | 76.85 | 19.69 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 4.98 | 77.59 | 19.85 |      | 80.0 |         |
|           |                                                                      | Z | 5.12 | 77.53 | 19.88 |      | 80.0 |         |
| 10501-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 4.38 | 71.91 | 17.55 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 4.19 | 72.01 | 17.27 |      | 80.0 |         |
|           |                                                                      | Z | 4.33 | 72.13 | 17.50 |      | 80.0 |         |
| 10502-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 4.41 | 71.66 | 17.40 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 4.21 | 71.71 | 17.09 |      | 80.0 |         |
|           |                                                                      | Z | 4.36 | 71.85 | 17.33 |      | 80.0 |         |
| 10503-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 5.10 | 76.19 | 19.80 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 4.94 | 76.71 | 20.05 |      | 80.0 |         |
|           |                                                                      | Z | 5.10 | 76.67 | 19.99 |      | 80.0 |         |
| 10504-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 4.44 | 71.51 | 18.08 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 4.28 | 71.74 | 18.06 |      | 80.0 |         |
|           |                                                                      | Z | 4.39 | 71.73 | 18.13 |      | 80.0 |         |
| 10505-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 4.51 | 71.23 | 18.00 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 4.34 | 71.46 | 17.96 |      | 80.0 |         |
|           |                                                                      | Z | 4.45 | 71.44 | 18.03 |      | 80.0 |         |
| 10506-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 5.55 | 75.59 | 19.57 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 5.33 | 75.87 | 19.80 |      | 80.0 |         |
|           |                                                                      | Z | 5.51 | 75.90 | 19.73 |      | 80.0 |         |
| 10507-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 4.76 | 70.96 | 18.19 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 4.57 | 71.05 | 18.23 |      | 80.0 |         |
|           |                                                                      | Z | 4.69 | 71.07 | 18.24 |      | 80.0 |         |

|           |                                                                     |   |      |       |       |      |       |         |
|-----------|---------------------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10508-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.81 | 70.58 | 18.08 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 4.62 | 70.68 | 18.11 |      | 80.0  |         |
|           |                                                                     | Z | 4.73 | 70.68 | 18.12 |      | 80.0  |         |
| 10509-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 5.59 | 73.58 | 18.84 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 5.39 | 73.76 | 19.02 |      | 80.0  |         |
|           |                                                                     | Z | 5.53 | 73.76 | 18.95 |      | 80.0  |         |
| 10510-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 5.20 | 70.42 | 18.08 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 4.99 | 70.43 | 18.12 |      | 80.0  |         |
|           |                                                                     | Z | 5.11 | 70.45 | 18.12 |      | 80.0  |         |
| 10511-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 5.22 | 70.10 | 18.00 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 5.03 | 70.13 | 18.04 |      | 80.0  |         |
|           |                                                                     | Z | 5.14 | 70.14 | 18.03 |      | 80.0  |         |
| 10512-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 6.02 | 75.44 | 19.39 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 5.78 | 75.56 | 19.57 |      | 80.0  |         |
|           |                                                                     | Z | 5.97 | 75.65 | 19.51 |      | 80.0  |         |
| 10513-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 5.12 | 70.82 | 18.23 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 4.91 | 70.75 | 18.25 |      | 80.0  |         |
|           |                                                                     | Z | 5.03 | 70.83 | 18.26 |      | 80.0  |         |
| 10514-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 5.09 | 70.31 | 18.08 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 4.90 | 70.27 | 18.11 |      | 80.0  |         |
|           |                                                                     | Z | 5.01 | 70.33 | 18.11 |      | 80.0  |         |
| 10515-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)           | X | 0.92 | 62.60 | 13.99 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 0.95 | 63.05 | 14.27 |      | 150.0 |         |
|           |                                                                     | Z | 0.91 | 62.72 | 14.07 |      | 150.0 |         |
| 10516-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)         | X | 0.48 | 67.26 | 14.71 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 0.54 | 68.48 | 15.75 |      | 150.0 |         |
|           |                                                                     | Z | 0.49 | 67.82 | 15.05 |      | 150.0 |         |
| 10517-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)          | X | 0.75 | 64.05 | 14.24 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 0.79 | 64.60 | 14.65 |      | 150.0 |         |
|           |                                                                     | Z | 0.75 | 64.23 | 14.37 |      | 150.0 |         |
| 10518-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)           | X | 4.52 | 66.69 | 16.06 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.44 | 66.90 | 16.10 |      | 150.0 |         |
|           |                                                                     | Z | 4.47 | 66.75 | 16.07 |      | 150.0 |         |
| 10519-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)          | X | 4.71 | 66.95 | 16.20 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.60 | 67.11 | 16.21 |      | 150.0 |         |
|           |                                                                     | Z | 4.65 | 66.98 | 16.20 |      | 150.0 |         |
| 10520-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)          | X | 4.56 | 66.90 | 16.11 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.46 | 67.05 | 16.12 |      | 150.0 |         |
|           |                                                                     | Z | 4.50 | 66.93 | 16.11 |      | 150.0 |         |
| 10521-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)          | X | 4.49 | 66.89 | 16.09 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.39 | 67.03 | 16.11 |      | 150.0 |         |
|           |                                                                     | Z | 4.44 | 66.91 | 16.09 |      | 150.0 |         |
| 10522-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)          | X | 4.55 | 66.96 | 16.17 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.45 | 67.16 | 16.21 |      | 150.0 |         |
|           |                                                                     | Z | 4.50 | 67.02 | 16.19 |      | 150.0 |         |



|           |                                                            |   |      |       |       |      |       |         |
|-----------|------------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10523-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle) | X | 4.43 | 66.81 | 16.00 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.35 | 67.05 | 16.07 |      | 150.0 |         |
|           |                                                            | Z | 4.38 | 66.88 | 16.02 |      | 150.0 |         |
| 10524-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle) | X | 4.50 | 66.89 | 16.14 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.39 | 67.08 | 16.18 |      | 150.0 |         |
|           |                                                            | Z | 4.44 | 66.94 | 16.15 |      | 150.0 |         |
| 10525-AAB | IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle)          | X | 4.47 | 65.92 | 15.72 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.40 | 66.15 | 15.78 |      | 150.0 |         |
|           |                                                            | Z | 4.43 | 65.98 | 15.74 |      | 150.0 |         |
| 10526-AAB | IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle)          | X | 4.65 | 66.29 | 15.87 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.55 | 66.47 | 15.91 |      | 150.0 |         |
|           |                                                            | Z | 4.59 | 66.34 | 15.88 |      | 150.0 |         |
| 10527-AAB | IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle)          | X | 4.57 | 66.25 | 15.81 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.47 | 66.43 | 15.85 |      | 150.0 |         |
|           |                                                            | Z | 4.52 | 66.29 | 15.82 |      | 150.0 |         |
| 10528-AAB | IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle)          | X | 4.58 | 66.27 | 15.84 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.49 | 66.45 | 15.88 |      | 150.0 |         |
|           |                                                            | Z | 4.53 | 66.31 | 15.85 |      | 150.0 |         |
| 10529-AAB | IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle)          | X | 4.58 | 66.27 | 15.84 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.49 | 66.45 | 15.88 |      | 150.0 |         |
|           |                                                            | Z | 4.53 | 66.31 | 15.85 |      | 150.0 |         |
| 10531-AAB | IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle)          | X | 4.58 | 66.38 | 15.85 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.46 | 66.51 | 15.87 |      | 150.0 |         |
|           |                                                            | Z | 4.52 | 66.40 | 15.86 |      | 150.0 |         |
| 10532-AAB | IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle)          | X | 4.44 | 66.22 | 15.78 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.33 | 66.36 | 15.80 |      | 150.0 |         |
|           |                                                            | Z | 4.38 | 66.25 | 15.78 |      | 150.0 |         |
| 10533-AAB | IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle)          | X | 4.59 | 66.30 | 15.83 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.49 | 66.51 | 15.88 |      | 150.0 |         |
|           |                                                            | Z | 4.54 | 66.36 | 15.84 |      | 150.0 |         |
| 10534-AAB | IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle)          | X | 5.13 | 66.43 | 15.94 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.04 | 66.54 | 15.97 |      | 150.0 |         |
|           |                                                            | Z | 5.08 | 66.45 | 15.95 |      | 150.0 |         |
| 10535-AAB | IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle)          | X | 5.20 | 66.61 | 16.01 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.10 | 66.71 | 16.05 |      | 150.0 |         |
|           |                                                            | Z | 5.15 | 66.64 | 16.04 |      | 150.0 |         |
| 10536-AAB | IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle)          | X | 5.06 | 66.54 | 15.96 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.98 | 66.67 | 16.01 |      | 150.0 |         |
|           |                                                            | Z | 5.01 | 66.57 | 15.98 |      | 150.0 |         |
| 10537-AAB | IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle)          | X | 5.12 | 66.52 | 15.95 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.03 | 66.63 | 15.99 |      | 150.0 |         |
|           |                                                            | Z | 5.07 | 66.54 | 15.97 |      | 150.0 |         |
| 10538-AAB | IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle)          | X | 5.22 | 66.56 | 16.02 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.11 | 66.64 | 16.04 |      | 150.0 |         |
|           |                                                            | Z | 5.16 | 66.56 | 16.02 |      | 150.0 |         |
| 10540-AAB | IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle)          | X | 5.14 | 66.57 | 16.03 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.04 | 66.62 | 16.05 |      | 150.0 |         |
|           |                                                            | Z | 5.10 | 66.60 | 16.05 |      | 150.0 |         |

|           |                                                    |   |      |       |       |      |       |         |
|-----------|----------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10541-AAB | IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle)  | X | 5.11 | 66.43 | 15.96 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.02 | 66.51 | 15.98 |      | 150.0 |         |
|           |                                                    | Z | 5.07 | 66.45 | 15.97 |      | 150.0 |         |
| 10542-AAB | IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle)  | X | 5.27 | 66.51 | 16.02 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.18 | 66.61 | 16.04 |      | 150.0 |         |
|           |                                                    | Z | 5.22 | 66.53 | 16.03 |      | 150.0 |         |
| 10543-AAB | IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle)  | X | 5.36 | 66.57 | 16.06 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.24 | 66.63 | 16.08 |      | 150.0 |         |
|           |                                                    | Z | 5.30 | 66.57 | 16.07 |      | 150.0 |         |
| 10544-AAB | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)  | X | 5.43 | 66.55 | 15.94 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.37 | 66.65 | 15.97 |      | 150.0 |         |
|           |                                                    | Z | 5.40 | 66.56 | 15.95 |      | 150.0 |         |
| 10545-AAB | IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle)  | X | 5.64 | 67.00 | 16.11 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.55 | 67.08 | 16.15 |      | 150.0 |         |
|           |                                                    | Z | 5.60 | 67.02 | 16.13 |      | 150.0 |         |
| 10546-AAB | IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle)  | X | 5.50 | 66.78 | 16.02 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.41 | 66.80 | 16.02 |      | 150.0 |         |
|           |                                                    | Z | 5.46 | 66.76 | 16.01 |      | 150.0 |         |
| 10547-AAB | IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle)  | X | 5.58 | 66.83 | 16.03 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.49 | 66.87 | 16.05 |      | 150.0 |         |
|           |                                                    | Z | 5.53 | 66.81 | 16.03 |      | 150.0 |         |
| 10548-AAB | IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle)  | X | 5.89 | 67.94 | 16.56 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.69 | 67.68 | 16.43 |      | 150.0 |         |
|           |                                                    | Z | 5.80 | 67.83 | 16.51 |      | 150.0 |         |
| 10550-AAB | IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle)  | X | 5.53 | 66.79 | 16.03 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.46 | 66.91 | 16.08 |      | 150.0 |         |
|           |                                                    | Z | 5.49 | 66.81 | 16.05 |      | 150.0 |         |
| 10551-AAB | IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle)  | X | 5.53 | 66.82 | 16.01 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.44 | 66.85 | 16.02 |      | 150.0 |         |
|           |                                                    | Z | 5.49 | 66.83 | 16.02 |      | 150.0 |         |
| 10552-AAB | IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle)  | X | 5.44 | 66.61 | 15.91 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.38 | 66.72 | 15.95 |      | 150.0 |         |
|           |                                                    | Z | 5.40 | 66.62 | 15.92 |      | 150.0 |         |
| 10553-AAB | IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle)  | X | 5.53 | 66.66 | 15.96 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.45 | 66.72 | 15.99 |      | 150.0 |         |
|           |                                                    | Z | 5.48 | 66.65 | 15.97 |      | 150.0 |         |
| 10554-AAC | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) | X | 5.84 | 66.93 | 16.04 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.78 | 67.01 | 16.06 |      | 150.0 |         |
|           |                                                    | Z | 5.81 | 66.94 | 16.05 |      | 150.0 |         |
| 10555-AAC | IEEE 802.11ac WiFi (160MHz, MCS1, 99pc duty cycle) | X | 5.98 | 67.25 | 16.17 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.90 | 67.29 | 16.19 |      | 150.0 |         |
|           |                                                    | Z | 5.94 | 67.25 | 16.18 |      | 150.0 |         |
| 10556-AAC | IEEE 802.11ac WiFi (160MHz, MCS2, 99pc duty cycle) | X | 6.00 | 67.29 | 16.19 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.93 | 67.35 | 16.21 |      | 150.0 |         |
|           |                                                    | Z | 5.96 | 67.30 | 16.20 |      | 150.0 |         |
| 10557-AAC | IEEE 802.11ac WiFi (160MHz, MCS3, 99pc duty cycle) | X | 5.96 | 67.20 | 16.16 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.88 | 67.23 | 16.17 |      | 150.0 |         |
|           |                                                    | Z | 5.92 | 67.18 | 16.16 |      | 150.0 |         |

|           |                                                                 |   |      |       |       |      |       |         |
|-----------|-----------------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10558-AAC | IEEE 802.11ac WiFi (160MHz, MCS4, 99pc duty cycle)              | X | 6.01 | 67.37 | 16.26 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 5.92 | 67.38 | 16.26 |      | 150.0 |         |
|           |                                                                 | Z | 5.97 | 67.35 | 16.26 |      | 150.0 |         |
| 10560-AAC | IEEE 802.11ac WiFi (160MHz, MCS6, 99pc duty cycle)              | X | 6.01 | 67.21 | 16.22 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 5.92 | 67.24 | 16.23 |      | 150.0 |         |
|           |                                                                 | Z | 5.96 | 67.19 | 16.22 |      | 150.0 |         |
| 10561-AAC | IEEE 802.11ac WiFi (160MHz, MCS7, 99pc duty cycle)              | X | 5.93 | 67.18 | 16.25 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 5.85 | 67.23 | 16.26 |      | 150.0 |         |
|           |                                                                 | Z | 5.89 | 67.18 | 16.25 |      | 150.0 |         |
| 10562-AAC | IEEE 802.11ac WiFi (160MHz, MCS8, 99pc duty cycle)              | X | 6.07 | 67.61 | 16.46 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 5.94 | 67.50 | 16.40 |      | 150.0 |         |
|           |                                                                 | Z | 6.01 | 67.54 | 16.43 |      | 150.0 |         |
| 10563-AAC | IEEE 802.11ac WiFi (160MHz, MCS9, 99pc duty cycle)              | X | 6.39 | 68.16 | 16.69 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 6.02 | 67.41 | 16.31 |      | 150.0 |         |
|           |                                                                 | Z | 6.19 | 67.71 | 16.48 |      | 150.0 |         |
| 10564-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle)  | X | 4.86 | 66.83 | 16.26 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.78 | 67.03 | 16.31 |      | 150.0 |         |
|           |                                                                 | Z | 4.81 | 66.87 | 16.27 |      | 150.0 |         |
| 10565-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle) | X | 5.09 | 67.28 | 16.58 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.98 | 67.43 | 16.60 |      | 150.0 |         |
|           |                                                                 | Z | 5.03 | 67.31 | 16.59 |      | 150.0 |         |
| 10566-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle) | X | 4.93 | 67.13 | 16.40 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.82 | 67.27 | 16.42 |      | 150.0 |         |
|           |                                                                 | Z | 4.87 | 67.15 | 16.40 |      | 150.0 |         |
| 10567-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle) | X | 4.95 | 67.50 | 16.74 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.84 | 67.61 | 16.74 |      | 150.0 |         |
|           |                                                                 | Z | 4.90 | 67.52 | 16.74 |      | 150.0 |         |
| 10568-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle) | X | 4.85 | 66.93 | 16.19 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.74 | 67.12 | 16.24 |      | 150.0 |         |
|           |                                                                 | Z | 4.79 | 66.97 | 16.19 |      | 150.0 |         |
| 10569-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle) | X | 4.91 | 67.57 | 16.79 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.82 | 67.76 | 16.84 |      | 150.0 |         |
|           |                                                                 | Z | 4.86 | 67.64 | 16.82 |      | 150.0 |         |
| 10570-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle) | X | 4.94 | 67.43 | 16.73 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.84 | 67.60 | 16.77 |      | 150.0 |         |
|           |                                                                 | Z | 4.89 | 67.48 | 16.75 |      | 150.0 |         |
| 10571-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)       | X | 1.25 | 65.19 | 15.53 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 1.27 | 65.45 | 15.71 |      | 130.0 |         |
|           |                                                                 | Z | 1.24 | 65.29 | 15.60 |      | 130.0 |         |
| 10572-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)       | X | 1.27 | 65.79 | 15.87 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 1.28 | 66.03 | 16.05 |      | 130.0 |         |
|           |                                                                 | Z | 1.26 | 65.90 | 15.96 |      | 130.0 |         |
| 10573-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)     | X | 2.61 | 85.52 | 21.81 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 2.97 | 88.51 | 23.34 |      | 130.0 |         |
|           |                                                                 | Z | 3.01 | 88.05 | 22.71 |      | 130.0 |         |
| 10574-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)      | X | 1.44 | 71.64 | 18.59 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 1.44 | 71.68 | 18.74 |      | 130.0 |         |
|           |                                                                 | Z | 1.45 | 72.00 | 18.80 |      | 130.0 |         |

|           |                                                                 |   |      |       |       |      |       |         |
|-----------|-----------------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10575-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle)  | X | 4.68 | 66.71 | 16.37 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.59 | 66.91 | 16.41 |      | 130.0 |         |
|           |                                                                 | Z | 4.63 | 66.76 | 16.38 |      | 130.0 |         |
| 10576-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle)  | X | 4.70 | 66.86 | 16.43 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.61 | 67.07 | 16.47 |      | 130.0 |         |
|           |                                                                 | Z | 4.65 | 66.92 | 16.44 |      | 130.0 |         |
| 10577-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle) | X | 4.91 | 67.16 | 16.60 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.79 | 67.31 | 16.62 |      | 130.0 |         |
|           |                                                                 | Z | 4.85 | 67.20 | 16.60 |      | 130.0 |         |
| 10578-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle) | X | 4.81 | 67.32 | 16.69 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.69 | 67.44 | 16.70 |      | 130.0 |         |
|           |                                                                 | Z | 4.75 | 67.35 | 16.70 |      | 130.0 |         |
| 10579-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle) | X | 4.58 | 66.65 | 16.03 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.47 | 66.80 | 16.06 |      | 130.0 |         |
|           |                                                                 | Z | 4.52 | 66.66 | 16.02 |      | 130.0 |         |
| 10580-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle) | X | 4.63 | 66.68 | 16.05 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.52 | 66.87 | 16.11 |      | 130.0 |         |
|           |                                                                 | Z | 4.57 | 66.71 | 16.05 |      | 130.0 |         |
| 10581-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle) | X | 4.71 | 67.36 | 16.64 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.60 | 67.52 | 16.66 |      | 130.0 |         |
|           |                                                                 | Z | 4.65 | 67.41 | 16.65 |      | 130.0 |         |
| 10582-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle) | X | 4.53 | 66.42 | 15.83 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.41 | 66.60 | 15.88 |      | 130.0 |         |
|           |                                                                 | Z | 4.46 | 66.43 | 15.82 |      | 130.0 |         |
| 10583-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)       | X | 4.68 | 66.71 | 16.37 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.59 | 66.91 | 16.41 |      | 130.0 |         |
|           |                                                                 | Z | 4.63 | 66.76 | 16.38 |      | 130.0 |         |
| 10584-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)       | X | 4.70 | 66.86 | 16.43 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.61 | 67.07 | 16.47 |      | 130.0 |         |
|           |                                                                 | Z | 4.65 | 66.92 | 16.44 |      | 130.0 |         |
| 10585-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)      | X | 4.91 | 67.16 | 16.60 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.79 | 67.31 | 16.62 |      | 130.0 |         |
|           |                                                                 | Z | 4.85 | 67.20 | 16.60 |      | 130.0 |         |
| 10586-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)      | X | 4.81 | 67.32 | 16.69 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.69 | 67.44 | 16.70 |      | 130.0 |         |
|           |                                                                 | Z | 4.75 | 67.35 | 16.70 |      | 130.0 |         |
| 10587-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)      | X | 4.58 | 66.65 | 16.03 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.47 | 66.80 | 16.06 |      | 130.0 |         |
|           |                                                                 | Z | 4.52 | 66.66 | 16.02 |      | 130.0 |         |
| 10588-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)      | X | 4.63 | 66.68 | 16.05 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.52 | 66.87 | 16.11 |      | 130.0 |         |
|           |                                                                 | Z | 4.57 | 66.71 | 16.05 |      | 130.0 |         |
| 10589-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)      | X | 4.71 | 67.36 | 16.64 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.60 | 67.52 | 16.66 |      | 130.0 |         |
|           |                                                                 | Z | 4.65 | 67.41 | 16.65 |      | 130.0 |         |
| 10590-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)      | X | 4.53 | 66.42 | 15.83 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.41 | 66.60 | 15.88 |      | 130.0 |         |
|           |                                                                 | Z | 4.46 | 66.43 | 15.82 |      | 130.0 |         |

|           |                                                       |   |      |       |       |      |       |         |
|-----------|-------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10591-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle) | X | 4.83 | 66.77 | 16.47 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.74 | 66.96 | 16.50 |      | 130.0 |         |
|           |                                                       | Z | 4.78 | 66.82 | 16.48 |      | 130.0 |         |
| 10592-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle) | X | 4.98 | 67.10 | 16.60 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.87 | 67.27 | 16.63 |      | 130.0 |         |
|           |                                                       | Z | 4.93 | 67.14 | 16.61 |      | 130.0 |         |
| 10593-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle) | X | 4.91 | 67.02 | 16.48 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.80 | 67.17 | 16.51 |      | 130.0 |         |
|           |                                                       | Z | 4.85 | 67.05 | 16.49 |      | 130.0 |         |
| 10594-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle) | X | 4.96 | 67.18 | 16.63 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.85 | 67.33 | 16.66 |      | 130.0 |         |
|           |                                                       | Z | 4.90 | 67.22 | 16.64 |      | 130.0 |         |
| 10595-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle) | X | 4.93 | 67.14 | 16.53 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.82 | 67.31 | 16.57 |      | 130.0 |         |
|           |                                                       | Z | 4.87 | 67.18 | 16.54 |      | 130.0 |         |
| 10596-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle) | X | 4.87 | 67.14 | 16.54 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.76 | 67.30 | 16.57 |      | 130.0 |         |
|           |                                                       | Z | 4.81 | 67.18 | 16.54 |      | 130.0 |         |
| 10597-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle) | X | 4.82 | 67.05 | 16.42 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.71 | 67.19 | 16.44 |      | 130.0 |         |
|           |                                                       | Z | 4.76 | 67.07 | 16.42 |      | 130.0 |         |
| 10598-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle) | X | 4.80 | 67.28 | 16.68 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.69 | 67.37 | 16.67 |      | 130.0 |         |
|           |                                                       | Z | 4.74 | 67.29 | 16.67 |      | 130.0 |         |
| 10599-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle) | X | 5.50 | 67.33 | 16.69 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.40 | 67.43 | 16.72 |      | 130.0 |         |
|           |                                                       | Z | 5.46 | 67.38 | 16.72 |      | 130.0 |         |
| 10600-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle) | X | 5.67 | 67.87 | 16.93 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.53 | 67.86 | 16.92 |      | 130.0 |         |
|           |                                                       | Z | 5.61 | 67.87 | 16.94 |      | 130.0 |         |
| 10601-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle) | X | 5.54 | 67.56 | 16.79 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.42 | 67.61 | 16.80 |      | 130.0 |         |
|           |                                                       | Z | 5.48 | 67.56 | 16.80 |      | 130.0 |         |
| 10602-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle) | X | 5.63 | 67.58 | 16.72 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.55 | 67.79 | 16.82 |      | 130.0 |         |
|           |                                                       | Z | 5.59 | 67.64 | 16.76 |      | 130.0 |         |
| 10603-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle) | X | 5.71 | 67.86 | 16.99 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.61 | 68.00 | 17.05 |      | 130.0 |         |
|           |                                                       | Z | 5.65 | 67.89 | 17.01 |      | 130.0 |         |
| 10604-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle) | X | 5.50 | 67.29 | 16.70 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.49 | 67.68 | 16.88 |      | 130.0 |         |
|           |                                                       | Z | 5.47 | 67.39 | 16.75 |      | 130.0 |         |
| 10605-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle) | X | 5.63 | 67.69 | 16.90 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.53 | 67.80 | 16.94 |      | 130.0 |         |
|           |                                                       | Z | 5.59 | 67.74 | 16.92 |      | 130.0 |         |
| 10606-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle) | X | 5.39 | 67.07 | 16.45 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.27 | 67.10 | 16.45 |      | 130.0 |         |
|           |                                                       | Z | 5.31 | 66.99 | 16.41 |      | 130.0 |         |

|           |                                                   |   |      |       |       |      |       |         |
|-----------|---------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10607-AAB | IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle) | X | 4.65 | 66.04 | 16.07 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.58 | 66.26 | 16.12 |      | 130.0 |         |
|           |                                                   | Z | 4.61 | 66.10 | 16.08 |      | 130.0 |         |
| 10608-AAB | IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle) | X | 4.85 | 66.45 | 16.23 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.74 | 66.63 | 16.28 |      | 130.0 |         |
|           |                                                   | Z | 4.79 | 66.50 | 16.25 |      | 130.0 |         |
| 10609-AAB | IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle) | X | 4.74 | 66.30 | 16.07 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.63 | 66.48 | 16.11 |      | 130.0 |         |
|           |                                                   | Z | 4.68 | 66.35 | 16.08 |      | 130.0 |         |
| 10610-AAB | IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle) | X | 4.79 | 66.46 | 16.23 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.68 | 66.63 | 16.27 |      | 130.0 |         |
|           |                                                   | Z | 4.73 | 66.50 | 16.25 |      | 130.0 |         |
| 10611-AAB | IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle) | X | 4.70 | 66.28 | 16.09 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.60 | 66.45 | 16.12 |      | 130.0 |         |
|           |                                                   | Z | 4.65 | 66.31 | 16.10 |      | 130.0 |         |
| 10612-AAB | IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle) | X | 4.72 | 66.43 | 16.13 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.60 | 66.61 | 16.18 |      | 130.0 |         |
|           |                                                   | Z | 4.66 | 66.47 | 16.14 |      | 130.0 |         |
| 10613-AAB | IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle) | X | 4.72 | 66.33 | 16.02 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.60 | 66.47 | 16.05 |      | 130.0 |         |
|           |                                                   | Z | 4.66 | 66.35 | 16.02 |      | 130.0 |         |
| 10614-AAB | IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle) | X | 4.66 | 66.50 | 16.24 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.55 | 66.62 | 16.25 |      | 130.0 |         |
|           |                                                   | Z | 4.60 | 66.53 | 16.25 |      | 130.0 |         |
| 10615-AAB | IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle) | X | 4.71 | 66.12 | 15.87 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.60 | 66.33 | 15.93 |      | 130.0 |         |
|           |                                                   | Z | 4.65 | 66.16 | 15.88 |      | 130.0 |         |
| 10616-AAB | IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle) | X | 5.31 | 66.56 | 16.28 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.21 | 66.65 | 16.31 |      | 130.0 |         |
|           |                                                   | Z | 5.26 | 66.57 | 16.29 |      | 130.0 |         |
| 10617-AAB | IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle) | X | 5.38 | 66.74 | 16.35 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.29 | 66.86 | 16.39 |      | 130.0 |         |
|           |                                                   | Z | 5.34 | 66.79 | 16.37 |      | 130.0 |         |
| 10618-AAB | IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle) | X | 5.26 | 66.74 | 16.36 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.18 | 66.87 | 16.40 |      | 130.0 |         |
|           |                                                   | Z | 5.22 | 66.77 | 16.38 |      | 130.0 |         |
| 10619-AAB | IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle) | X | 5.29 | 66.59 | 16.22 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.19 | 66.67 | 16.25 |      | 130.0 |         |
|           |                                                   | Z | 5.23 | 66.58 | 16.22 |      | 130.0 |         |
| 10620-AAB | IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle) | X | 5.38 | 66.62 | 16.29 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.27 | 66.70 | 16.31 |      | 130.0 |         |
|           |                                                   | Z | 5.32 | 66.62 | 16.29 |      | 130.0 |         |
| 10621-AAB | IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle) | X | 5.37 | 66.71 | 16.45 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.27 | 66.80 | 16.47 |      | 130.0 |         |
|           |                                                   | Z | 5.32 | 66.74 | 16.47 |      | 130.0 |         |
| 10622-AAB | IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle) | X | 5.39 | 66.89 | 16.53 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.29 | 66.97 | 16.55 |      | 130.0 |         |
|           |                                                   | Z | 5.34 | 66.92 | 16.55 |      | 130.0 |         |

|           |                                                    |   |      |       |       |      |       |         |
|-----------|----------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10623-AAB | IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle)  | X | 5.26 | 66.41 | 16.17 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.16 | 66.51 | 16.20 |      | 130.0 |         |
|           |                                                    | Z | 5.21 | 66.44 | 16.19 |      | 130.0 |         |
| 10624-AAB | IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle)  | X | 5.45 | 66.63 | 16.34 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.35 | 66.71 | 16.36 |      | 130.0 |         |
|           |                                                    | Z | 5.40 | 66.64 | 16.35 |      | 130.0 |         |
| 10625-AAB | IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle)  | X | 5.87 | 67.75 | 16.95 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.59 | 67.32 | 16.72 |      | 130.0 |         |
|           |                                                    | Z | 5.77 | 67.62 | 16.89 |      | 130.0 |         |
| 10626-AAB | IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle)  | X | 5.59 | 66.61 | 16.24 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.53 | 66.71 | 16.27 |      | 130.0 |         |
|           |                                                    | Z | 5.56 | 66.63 | 16.25 |      | 130.0 |         |
| 10627-AAB | IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle)  | X | 5.86 | 67.23 | 16.51 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.77 | 67.31 | 16.54 |      | 130.0 |         |
|           |                                                    | Z | 5.82 | 67.26 | 16.53 |      | 130.0 |         |
| 10628-AAB | IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle)  | X | 5.64 | 66.75 | 16.20 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.54 | 66.76 | 16.20 |      | 130.0 |         |
|           |                                                    | Z | 5.59 | 66.73 | 16.20 |      | 130.0 |         |
| 10629-AAB | IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle)  | X | 5.74 | 66.86 | 16.25 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.63 | 66.85 | 16.25 |      | 130.0 |         |
|           |                                                    | Z | 5.67 | 66.78 | 16.22 |      | 130.0 |         |
| 10630-AAB | IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle)  | X | 6.27 | 68.62 | 17.13 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.98 | 68.12 | 16.89 |      | 130.0 |         |
|           |                                                    | Z | 6.16 | 68.44 | 17.05 |      | 130.0 |         |
| 10631-AAB | IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle)  | X | 6.08 | 68.18 | 17.10 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.89 | 67.92 | 16.96 |      | 130.0 |         |
|           |                                                    | Z | 6.00 | 68.07 | 17.05 |      | 130.0 |         |
| 10632-AAB | IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle)  | X | 5.81 | 67.25 | 16.65 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.73 | 67.36 | 16.70 |      | 130.0 |         |
|           |                                                    | Z | 5.78 | 67.29 | 16.68 |      | 130.0 |         |
| 10633-AAB | IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle)  | X | 5.70 | 66.88 | 16.30 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.61 | 66.94 | 16.32 |      | 130.0 |         |
|           |                                                    | Z | 5.64 | 66.86 | 16.29 |      | 130.0 |         |
| 10634-AAB | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle)  | X | 5.68 | 66.90 | 16.36 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.59 | 66.94 | 16.37 |      | 130.0 |         |
|           |                                                    | Z | 5.63 | 66.89 | 16.36 |      | 130.0 |         |
| 10635-AAB | IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle)  | X | 5.57 | 66.28 | 15.80 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.47 | 66.33 | 15.83 |      | 130.0 |         |
|           |                                                    | Z | 5.52 | 66.25 | 15.79 |      | 130.0 |         |
| 10636-AAC | IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle) | X | 6.01 | 67.00 | 16.34 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.95 | 67.08 | 16.37 |      | 130.0 |         |
|           |                                                    | Z | 5.98 | 67.00 | 16.35 |      | 130.0 |         |
| 10637-AAC | IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle) | X | 6.18 | 67.41 | 16.53 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 6.10 | 67.45 | 16.54 |      | 130.0 |         |
|           |                                                    | Z | 6.14 | 67.41 | 16.54 |      | 130.0 |         |
| 10638-AAC | IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle) | X | 6.18 | 67.38 | 16.49 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 6.10 | 67.42 | 16.51 |      | 130.0 |         |
|           |                                                    | Z | 6.14 | 67.38 | 16.50 |      | 130.0 |         |

|           |                                                        |   |        |        |       |       |       |         |
|-----------|--------------------------------------------------------|---|--------|--------|-------|-------|-------|---------|
| 10639-AAC | IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle)     | X | 6.15   | 67.32  | 16.51 | 0.46  | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.07   | 67.34  | 16.50 |       | 130.0 |         |
|           |                                                        | Z | 6.11   | 67.30  | 16.50 |       | 130.0 |         |
| 10640-AAC | IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle)     | X | 6.17   | 67.36  | 16.47 | 0.46  | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.07   | 67.36  | 16.47 |       | 130.0 |         |
|           |                                                        | Z | 6.11   | 67.32  | 16.45 |       | 130.0 |         |
| 10641-AAC | IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle)     | X | 6.20   | 67.22  | 16.42 | 0.46  | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.14   | 67.34  | 16.48 |       | 130.0 |         |
|           |                                                        | Z | 6.17   | 67.26  | 16.44 |       | 130.0 |         |
| 10642-AAC | IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle)     | X | 6.24   | 67.47  | 16.71 | 0.46  | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.15   | 67.50  | 16.71 |       | 130.0 |         |
|           |                                                        | Z | 6.19   | 67.46  | 16.71 |       | 130.0 |         |
| 10643-AAC | IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle)     | X | 6.08   | 67.18  | 16.46 | 0.46  | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.01   | 67.25  | 16.50 |       | 130.0 |         |
|           |                                                        | Z | 6.04   | 67.18  | 16.47 |       | 130.0 |         |
| 10644-AAC | IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle)     | X | 6.27   | 67.76  | 16.77 | 0.46  | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.11   | 67.57  | 16.67 |       | 130.0 |         |
|           |                                                        | Z | 6.19   | 67.64  | 16.72 |       | 130.0 |         |
| 10645-AAC | IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle)     | X | 6.75   | 68.75  | 17.22 | 0.46  | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.24   | 67.62  | 16.66 |       | 130.0 |         |
|           |                                                        | Z | 6.47   | 68.11  | 16.92 |       | 130.0 |         |
| 10646-AAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7)  | X | 46.96  | 124.69 | 40.77 | 9.30  | 60.0  | ± 9.6 % |
|           |                                                        | Y | 100.00 | 148.37 | 48.20 |       | 60.0  |         |
|           |                                                        | Z | 67.01  | 134.85 | 43.85 |       | 60.0  |         |
| 10647-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7) | X | 46.42  | 125.36 | 41.11 | 9.30  | 60.0  | ± 9.6 % |
|           |                                                        | Y | 100.00 | 149.72 | 48.78 |       | 60.0  |         |
|           |                                                        | Z | 63.71  | 134.73 | 44.00 |       | 60.0  |         |
| 10648-AAA | CDMA2000 (1x Advanced)                                 | X | 0.63   | 62.54  | 9.79  | 0.00  | 150.0 | ± 9.6 % |
|           |                                                        | Y | 0.58   | 62.24  | 9.19  |       | 150.0 |         |
|           |                                                        | Z | 0.59   | 62.30  | 9.35  |       | 150.0 |         |
| 10652-AAB | LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)         | X | 4.19   | 68.34  | 17.06 | 2.23  | 80.0  | ± 9.6 % |
|           |                                                        | Y | 4.08   | 68.62  | 17.03 |       | 80.0  |         |
|           |                                                        | Z | 4.14   | 68.48  | 17.06 |       | 80.0  |         |
| 10653-AAB | LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)        | X | 4.68   | 67.61  | 17.18 | 2.23  | 80.0  | ± 9.6 % |
|           |                                                        | Y | 4.56   | 67.77  | 17.19 |       | 80.0  |         |
|           |                                                        | Z | 4.62   | 67.66  | 17.19 |       | 80.0  |         |
| 10654-AAB | LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)        | X | 4.63   | 67.27  | 17.19 | 2.23  | 80.0  | ± 9.6 % |
|           |                                                        | Y | 4.54   | 67.39  | 17.21 |       | 80.0  |         |
|           |                                                        | Z | 4.58   | 67.31  | 17.20 |       | 80.0  |         |
| 10655-AAB | LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)        | X | 4.69   | 67.27  | 17.23 | 2.23  | 80.0  | ± 9.6 % |
|           |                                                        | Y | 4.60   | 67.35  | 17.25 |       | 80.0  |         |
|           |                                                        | Z | 4.64   | 67.28  | 17.23 |       | 80.0  |         |
| 10658-AAA | Pulse Waveform (200Hz, 10%)                            | X | 19.17  | 92.59  | 24.24 | 10.00 | 50.0  | ± 9.6 % |
|           |                                                        | Y | 41.94  | 104.68 | 27.26 |       | 50.0  |         |
|           |                                                        | Z | 24.50  | 96.17  | 24.98 |       | 50.0  |         |
| 10659-AAA | Pulse Waveform (200Hz, 20%)                            | X | 100.00 | 114.36 | 28.32 | 6.99  | 60.0  | ± 9.6 % |
|           |                                                        | Y | 100.00 | 114.20 | 27.89 |       | 60.0  |         |
|           |                                                        | Z | 100.00 | 113.56 | 27.75 |       | 60.0  |         |



|           |                             |   |        |        |       |      |       |         |
|-----------|-----------------------------|---|--------|--------|-------|------|-------|---------|
| 10660-AAA | Pulse Waveform (200Hz, 40%) | X | 100.00 | 111.43 | 25.50 | 3.98 | 80.0  | ± 9.6 % |
|           |                             | Y | 100.00 | 112.46 | 25.73 |      | 80.0  |         |
|           |                             | Z | 100.00 | 110.79 | 25.07 |      | 80.0  |         |
| 10661-AAA | Pulse Waveform (200Hz, 60%) | X | 100.00 | 110.47 | 23.74 | 2.22 | 100.0 | ± 9.6 % |
|           |                             | Y | 100.00 | 113.22 | 24.78 |      | 100.0 |         |
|           |                             | Z | 100.00 | 109.90 | 23.38 |      | 100.0 |         |
| 10662-AAA | Pulse Waveform (200Hz, 80%) | X | 100.00 | 107.83 | 20.92 | 0.97 | 120.0 | ± 9.6 % |
|           |                             | Y | 100.00 | 115.39 | 23.98 |      | 120.0 |         |
|           |                             | Z | 100.00 | 107.00 | 20.48 |      | 120.0 |         |

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **EX3-3914\_Feb18**

## CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3914**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-12.v9, QA CAL-14.v4, QA CAL-23.v5,  
QA CAL-25.v6  
Calibration procedure for dosimetric E-field probes**

*BN*  
*02-23-2018*

Calibration date: **February 14, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|------------------|-----------------------------------|------------------------|
| Power meter NRP            | SN: 104778       | 04-Apr-17 (No. 217-02521/02522)   | Apr-18                 |
| Power sensor NRP-Z91       | SN: 103244       | 04-Apr-17 (No. 217-02521)         | Apr-18                 |
| Power sensor NRP-Z91       | SN: 103245       | 04-Apr-17 (No. 217-02525)         | Apr-18                 |
| Reference 20 dB Attenuator | SN: S5277 (20x)  | 07-Apr-17 (No. 217-02528)         | Apr-18                 |
| Reference Probe ES3DV2     | SN: 3013         | 30-Dec-17 (No. ES3-3013_Dec17)    | Dec-18                 |
| DAE4                       | SN: 660          | 21-Dec-17 (No. DAE4-660_Dec17)    | Dec-18                 |
| Secondary Standards        | ID               | Check Date (in house)             | Scheduled Check        |
| Power meter E4419B         | SN: GB41293874   | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A        | SN: MY41498087   | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A        | SN: 000110210    | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| RF generator HP 8648C      | SN: US3642U01700 | 04-Aug-99 (in house check Jun-16) | In house check: Jun-18 |
| Network Analyzer HP 8753E  | SN: US37390585   | 18-Oct-01 (in house check Oct-17) | In house check: Oct-18 |

|                |                               |                                   |               |
|----------------|-------------------------------|-----------------------------------|---------------|
| Calibrated by: | Name<br><b>Jeton Kastrati</b> | Function<br>Laboratory Technician | Signature<br> |
| Approved by:   | Name<br><b>Katja Pokovic</b>  | Technical Manager                 |               |

Issued: February 14, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

## Glossary:

|                          |                                                                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                      | tissue simulating liquid                                                                                                                                |
| NORM <sub>x,y,z</sub>    | sensitivity in free space                                                                                                                               |
| ConvF                    | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                              |
| DCP                      | diode compression point                                                                                                                                 |
| CF                       | crest factor (1/duty_cycle) of the RF signal                                                                                                            |
| A, B, C, D               | modulation dependent linearization parameters                                                                                                           |
| Polarization $\varphi$   | $\varphi$ rotation around probe axis                                                                                                                    |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle          | information used in DASY system to align probe sensor X to the robot coordinate system                                                                  |

## Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

## Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

# Probe EX3DV4

## SN:3914

Manufactured: December 18, 2012  
Calibrated: February 14, 2018

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3914

### Basic Calibration Parameters

|                                                           | Sensor X | Sensor Y | Sensor Z | Unc (k=2)     |
|-----------------------------------------------------------|----------|----------|----------|---------------|
| Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 0.47     | 0.41     | 0.44     | $\pm 10.1 \%$ |
| DCP (mV) <sup>B</sup>                                     | 98.1     | 103.5    | 99.1     |               |

### Modulation Calibration Parameters

| UID | Communication System Name |   | A<br>dB | B<br>dB $\sqrt{\mu\text{V}}$ | C   | D<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|-----|---------------------------|---|---------|------------------------------|-----|---------|----------|---------------------------|
| 0   | CW                        | X | 0.0     | 0.0                          | 1.0 | 0.00    | 157.3    | $\pm 3.5 \%$              |
|     |                           | Y | 0.0     | 0.0                          | 1.0 |         | 143.4    |                           |
|     |                           | Z | 0.0     | 0.0                          | 1.0 |         | 153.1    |                           |

Note: For details on UID parameters see Appendix.

### Sensor Model Parameters

|   | C1<br>fF | C2<br>fF | $\alpha$<br>$\text{V}^{-1}$ | T1<br>$\text{ms} \cdot \text{V}^{-2}$ | T2<br>$\text{ms} \cdot \text{V}^{-1}$ | T3<br>ms | T4<br>$\text{V}^{-2}$ | T5<br>$\text{V}^{-1}$ | T6    |
|---|----------|----------|-----------------------------|---------------------------------------|---------------------------------------|----------|-----------------------|-----------------------|-------|
| X | 44.52    | 338.7    | 36.78                       | 11.30                                 | 0.699                                 | 5.054    | 0.000                 | 0.544                 | 1.006 |
| Y | 43.63    | 317.9    | 34.18                       | 13.04                                 | 0.623                                 | 5.031    | 2.000                 | 0.164                 | 1.007 |
| Z | 41.48    | 314.2    | 36.51                       | 10.96                                 | 0.847                                 | 5.054    | 0.251                 | 0.494                 | 1.008 |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3914

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 6                    | 55.5                               | 0.75                            | 21.06   | 21.06   | 21.06   | 0.00               | 1.00                    | ± 13.3 %  |
| 13                   | 55.5                               | 0.75                            | 17.97   | 17.97   | 17.97   | 0.00               | 1.00                    | ± 13.3 %  |
| 750                  | 41.9                               | 0.89                            | 10.18   | 10.18   | 10.18   | 0.58               | 0.80                    | ± 12.0 %  |
| 835                  | 41.5                               | 0.90                            | 9.70    | 9.70    | 9.70    | 0.52               | 0.80                    | ± 12.0 %  |
| 1750                 | 40.1                               | 1.37                            | 8.34    | 8.34    | 8.34    | 0.40               | 0.80                    | ± 12.0 %  |
| 1900                 | 40.0                               | 1.40                            | 7.98    | 7.98    | 7.98    | 0.41               | 0.84                    | ± 12.0 %  |
| 2300                 | 39.5                               | 1.67                            | 7.58    | 7.58    | 7.58    | 0.37               | 0.87                    | ± 12.0 %  |
| 2450                 | 39.2                               | 1.80                            | 7.26    | 7.26    | 7.26    | 0.43               | 0.84                    | ± 12.0 %  |
| 2600                 | 39.0                               | 1.96                            | 7.04    | 7.04    | 7.04    | 0.29               | 0.86                    | ± 12.0 %  |
| 3500                 | 37.9                               | 2.91                            | 6.99    | 6.99    | 6.99    | 0.25               | 1.20                    | ± 13.1 %  |
| 3700                 | 37.7                               | 3.12                            | 6.72    | 6.72    | 6.72    | 0.23               | 1.20                    | ± 13.1 %  |
| 5250                 | 35.9                               | 4.71                            | 5.41    | 5.41    | 5.41    | 0.30               | 1.80                    | ± 13.1 %  |
| 5600                 | 35.5                               | 5.07                            | 4.79    | 4.79    | 4.79    | 0.40               | 1.80                    | ± 13.1 %  |
| 5750                 | 35.4                               | 5.22                            | 4.78    | 4.78    | 4.78    | 0.40               | 1.80                    | ± 13.1 %  |

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3914

### Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 750                  | 55.5                               | 0.96                            | 9.75    | 9.75    | 9.75    | 0.47               | 0.80                    | ± 12.0 %  |
| 835                  | 55.2                               | 0.97                            | 9.57    | 9.57    | 9.57    | 0.44               | 0.89                    | ± 12.0 %  |
| 1750                 | 53.4                               | 1.49                            | 7.91    | 7.91    | 7.91    | 0.37               | 0.80                    | ± 12.0 %  |
| 1900                 | 53.3                               | 1.52                            | 7.62    | 7.62    | 7.62    | 0.29               | 1.01                    | ± 12.0 %  |
| 2300                 | 52.9                               | 1.81                            | 7.46    | 7.46    | 7.46    | 0.40               | 0.88                    | ± 12.0 %  |
| 2450                 | 52.7                               | 1.95                            | 7.39    | 7.39    | 7.39    | 0.39               | 0.86                    | ± 12.0 %  |
| 2600                 | 52.5                               | 2.16                            | 7.05    | 7.05    | 7.05    | 0.28               | 1.05                    | ± 12.0 %  |
| 3500                 | 51.3                               | 3.31                            | 6.81    | 6.81    | 6.81    | 0.30               | 1.25                    | ± 13.1 %  |
| 3700                 | 51.0                               | 3.55                            | 6.64    | 6.64    | 6.64    | 0.30               | 1.25                    | ± 13.1 %  |
| 5250                 | 48.9                               | 5.36                            | 4.81    | 4.81    | 4.81    | 0.35               | 1.90                    | ± 13.1 %  |
| 5600                 | 48.5                               | 5.77                            | 4.09    | 4.09    | 4.09    | 0.40               | 1.90                    | ± 13.1 %  |
| 5750                 | 48.3                               | 5.94                            | 4.22    | 4.22    | 4.22    | 0.40               | 1.90                    | ± 13.1 %  |


<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

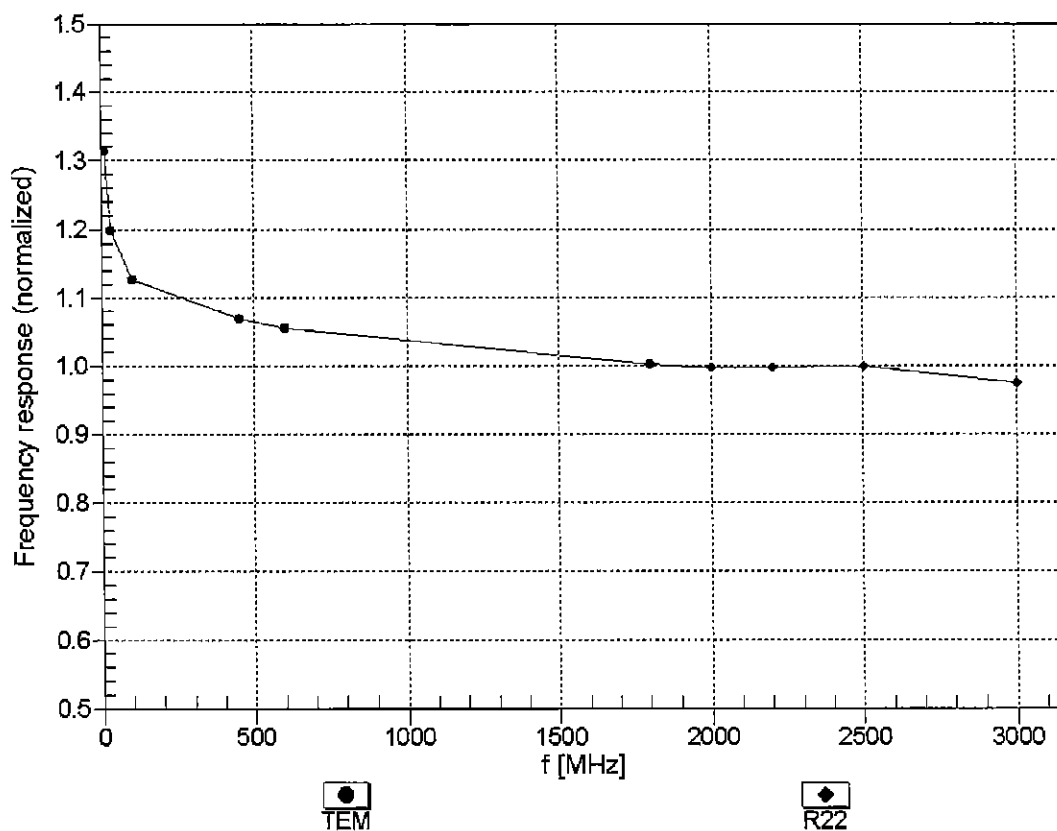


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )





## Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

f=600 MHz,TEM


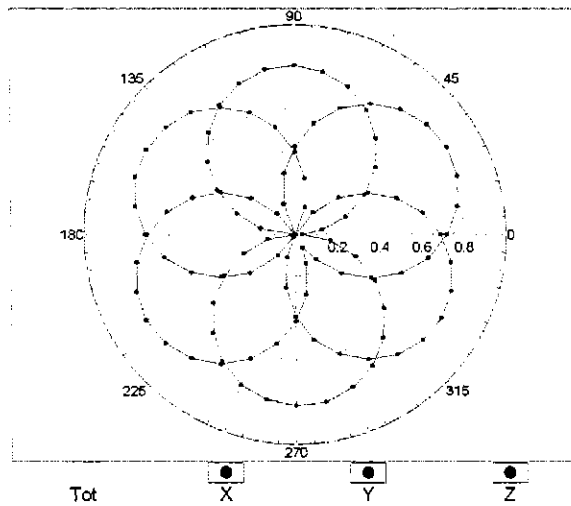


f=1800 MHz,R22

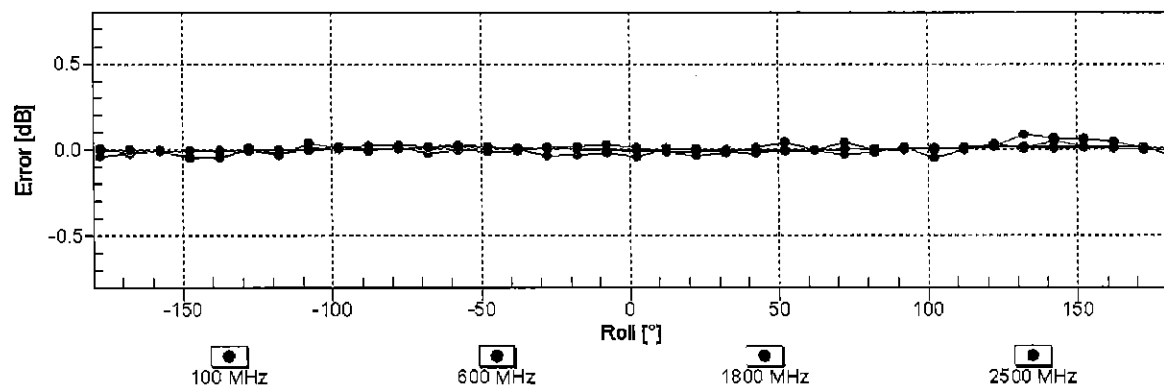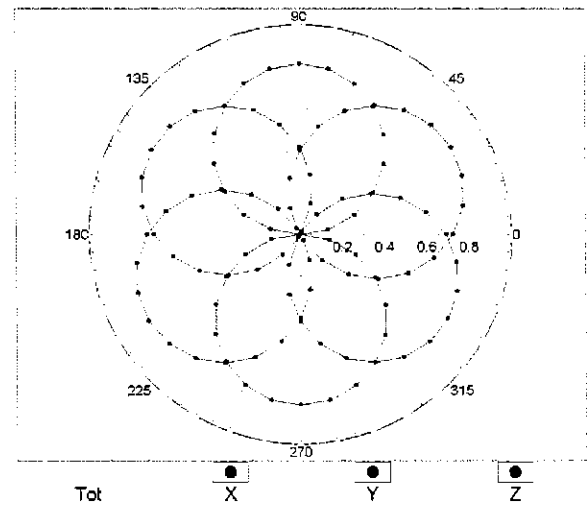


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)

# Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f_{\text{eval}} = 1900 \text{ MHz}$ )

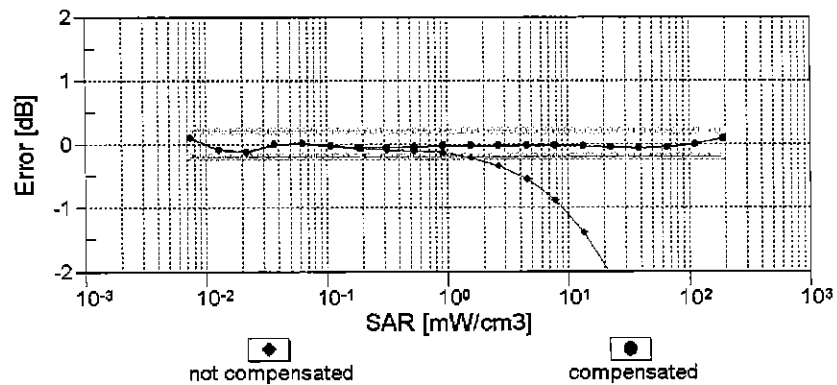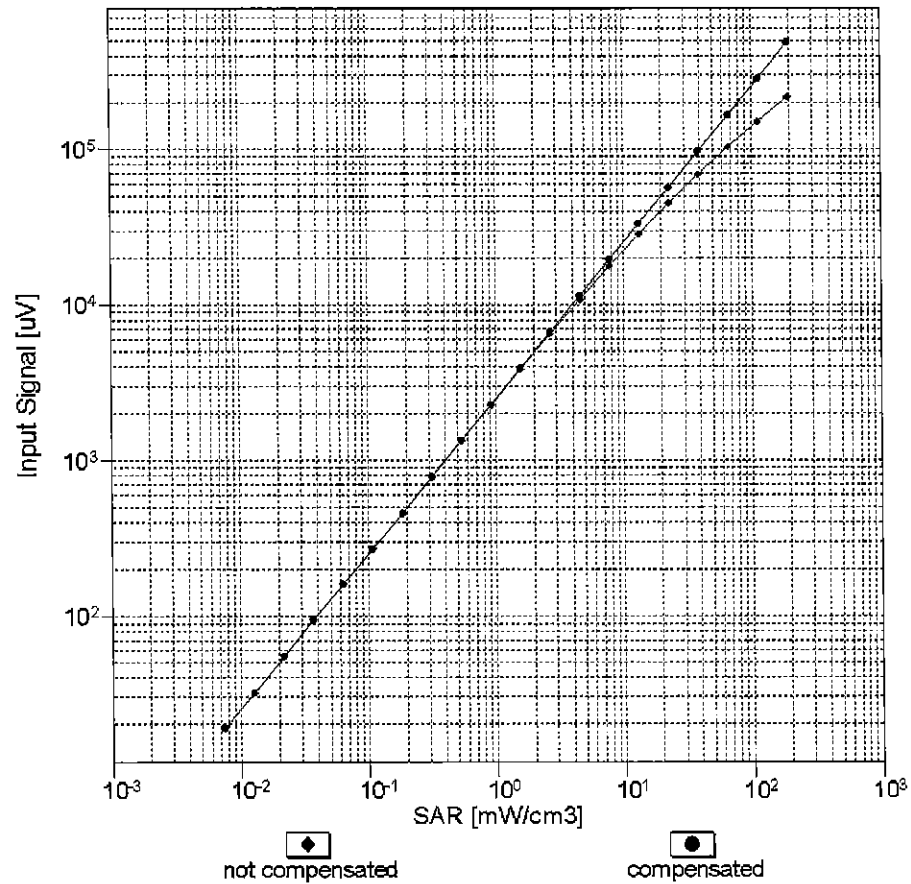



Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

## Conversion Factor Assessment

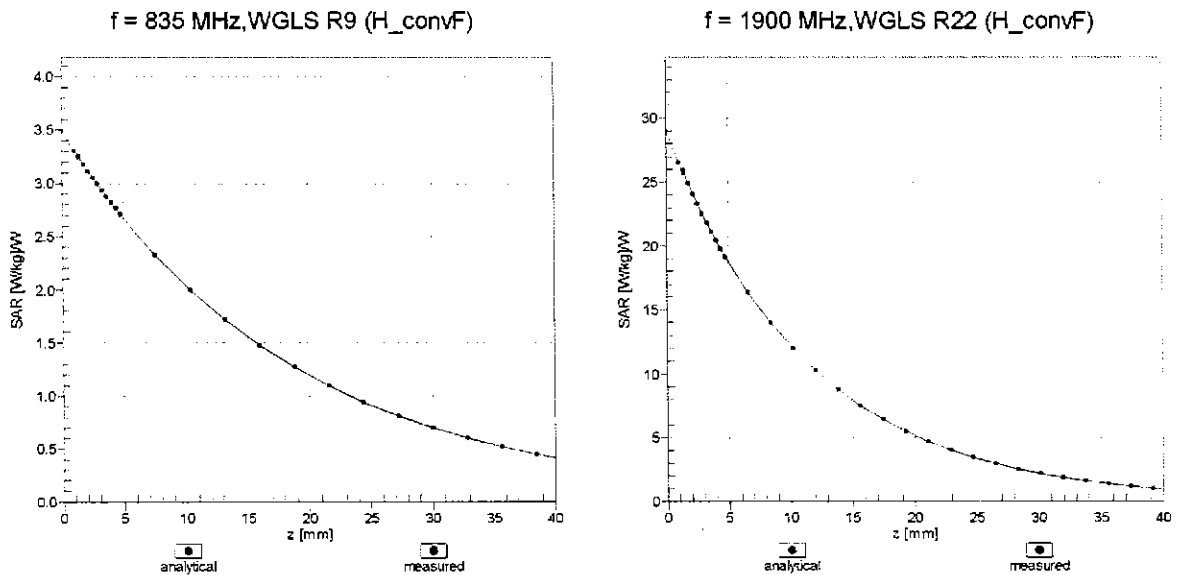

## Deviation from Isotropy in Liquid

Error ( $\phi$ ,  $\theta$ ),  $f = 900 \text{ MHz}$

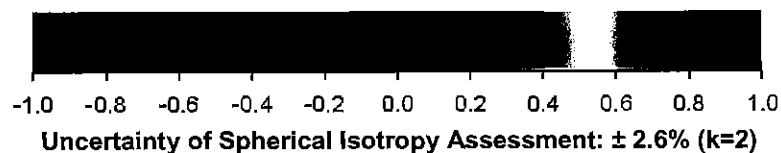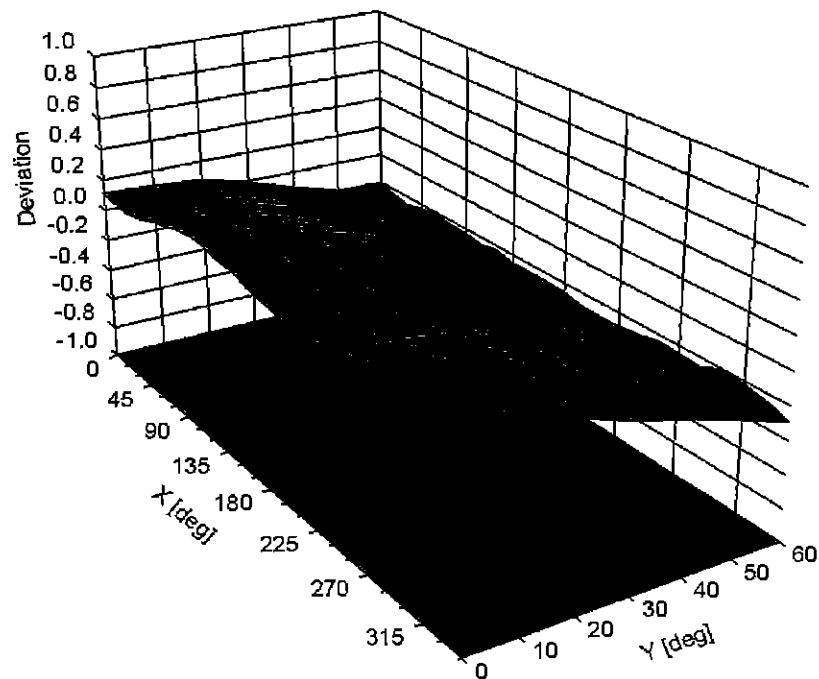

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3914

### Other Probe Parameters

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | 132.3      |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disabled   |
| Probe Overall Length                          | 337 mm     |
| Probe Body Diameter                           | 10 mm      |
| Tip Length                                    | 9 mm       |
| Tip Diameter                                  | 2.5 mm     |
| Probe Tip to Sensor X Calibration Point       | 1 mm       |
| Probe Tip to Sensor Y Calibration Point       | 1 mm       |
| Probe Tip to Sensor Z Calibration Point       | 1 mm       |
| Recommended Measurement Distance from Surface | 1.4 mm     |

**Appendix: Modulation Calibration Parameters**

| UID           | Communication System Name                     |   | A<br>dB | B<br>dB $\mu$ V | C     | D<br>dB | VR<br>mV | Max<br>Unc <sup>E</sup><br>(k=2) |
|---------------|-----------------------------------------------|---|---------|-----------------|-------|---------|----------|----------------------------------|
| 0             | CW                                            | X | 0.00    | 0.00            | 1.00  | 0.00    | 157.3    | $\pm 3.5 \%$                     |
|               |                                               | Y | 0.00    | 0.00            | 1.00  |         | 143.4    |                                  |
|               |                                               | Z | 0.00    | 0.00            | 1.00  |         | 153.1    |                                  |
| 10010-<br>CAA | SAR Validation (Square, 100ms, 10ms)          | X | 2.02    | 63.97           | 9.10  | 10.00   | 20.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 2.59    | 66.85           | 10.84 |         | 20.0     |                                  |
|               |                                               | Z | 2.31    | 65.14           | 9.98  |         | 20.0     |                                  |
| 10011-<br>CAB | UMTS-FDD (WCDMA)                              | X | 0.89    | 66.39           | 14.20 | 0.00    | 150.0    | $\pm 9.6 \%$                     |
|               |                                               | Y | 1.06    | 68.74           | 16.01 |         | 150.0    |                                  |
|               |                                               | Z | 0.90    | 66.80           | 14.44 |         | 150.0    |                                  |
| 10012-<br>CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)      | X | 1.06    | 63.38           | 14.79 | 0.41    | 150.0    | $\pm 9.6 \%$                     |
|               |                                               | Y | 1.17    | 64.37           | 15.54 |         | 150.0    |                                  |
|               |                                               | Z | 1.07    | 63.61           | 14.94 |         | 150.0    |                                  |
| 10013-<br>CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | X | 4.75    | 66.53           | 16.97 | 1.46    | 150.0    | $\pm 9.6 \%$                     |
|               |                                               | Y | 4.80    | 66.78           | 17.02 |         | 150.0    |                                  |
|               |                                               | Z | 4.73    | 66.65           | 17.01 |         | 150.0    |                                  |
| 10021-<br>DAC | GSM-FDD (TDMA, GMSK)                          | X | 100.00  | 110.09          | 25.45 | 9.39    | 50.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 112.00          | 26.43 |         | 50.0     |                                  |
|               |                                               | Z | 100.00  | 111.93          | 26.50 |         | 50.0     |                                  |
| 10023-<br>DAC | GPRS-FDD (TDMA, GMSK, TN 0)                   | X | 100.00  | 109.83          | 25.39 | 9.57    | 50.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 111.69          | 26.33 |         | 50.0     |                                  |
|               |                                               | Z | 100.00  | 111.63          | 26.42 |         | 50.0     |                                  |
| 10024-<br>DAC | GPRS-FDD (TDMA, GMSK, TN 0-1)                 | X | 100.00  | 107.43          | 23.14 | 6.56    | 60.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 110.61          | 24.77 |         | 60.0     |                                  |
|               |                                               | Z | 100.00  | 109.57          | 24.26 |         | 60.0     |                                  |
| 10025-<br>DAC | EDGE-FDD (TDMA, 8PSK, TN 0)                   | X | 4.03    | 68.96           | 25.05 | 12.57   | 50.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 5.30    | 77.15           | 29.41 |         | 50.0     |                                  |
|               |                                               | Z | 4.06    | 68.52           | 24.65 |         | 50.0     |                                  |
| 10026-<br>DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1)                 | X | 8.87    | 91.28           | 32.17 | 9.56    | 60.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 10.08   | 94.25           | 33.27 |         | 60.0     |                                  |
|               |                                               | Z | 8.65    | 90.32           | 31.77 |         | 60.0     |                                  |
| 10027-<br>DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2)               | X | 100.00  | 105.82          | 21.66 | 4.80    | 80.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 111.09          | 24.24 |         | 80.0     |                                  |
|               |                                               | Z | 100.00  | 108.42          | 22.93 |         | 80.0     |                                  |
| 10028-<br>DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)             | X | 100.00  | 104.11          | 20.26 | 3.55    | 100.0    | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 112.84          | 24.34 |         | 100.0    |                                  |
|               |                                               | Z | 100.00  | 107.37          | 21.76 |         | 100.0    |                                  |
| 10029-<br>DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2)               | X | 5.57    | 80.93           | 27.02 | 7.80    | 80.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 6.11    | 82.68           | 27.69 |         | 80.0     |                                  |
|               |                                               | Z | 5.53    | 80.55           | 26.85 |         | 80.0     |                                  |
| 10030-<br>CAA | IEEE 802.15.1 Bluetooth (GFSK, DH1)           | X | 100.00  | 104.99          | 21.59 | 5.30    | 70.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 109.04          | 23.62 |         | 70.0     |                                  |
|               |                                               | Z | 100.00  | 107.17          | 22.68 |         | 70.0     |                                  |
| 10031-<br>CAA | IEEE 802.15.1 Bluetooth (GFSK, DH3)           | X | 0.46    | 62.47           | 6.17  | 1.88    | 100.0    | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 111.97          | 22.67 |         | 100.0    |                                  |
|               |                                               | Z | 100.00  | 95.35           | 15.52 |         | 100.0    |                                  |

|           |                                                     |   |        |        |       |       |       |         |
|-----------|-----------------------------------------------------|---|--------|--------|-------|-------|-------|---------|
| 10032-CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5)                 | X | 0.19   | 60.00  | 3.78  | 1.17  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 100.00 | 120.03 | 24.95 |       | 100.0 |         |
|           |                                                     | Z | 0.19   | 60.00  | 4.15  |       | 100.0 |         |
| 10033-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)           | X | 13.55  | 95.45  | 24.90 | 5.30  | 70.0  | ± 9.6 % |
|           |                                                     | Y | 18.76  | 100.49 | 26.60 |       | 70.0  |         |
|           |                                                     | Z | 13.36  | 94.67  | 24.55 |       | 70.0  |         |
| 10034-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)           | X | 2.70   | 75.51  | 16.71 | 1.88  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 4.49   | 82.47  | 19.70 |       | 100.0 |         |
|           |                                                     | Z | 2.90   | 76.09  | 16.70 |       | 100.0 |         |
| 10035-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)           | X | 1.71   | 70.85  | 14.56 | 1.17  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 2.70   | 76.95  | 17.56 |       | 100.0 |         |
|           |                                                     | Z | 1.78   | 71.24  | 14.48 |       | 100.0 |         |
| 10036-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH1)               | X | 22.62  | 103.29 | 27.18 | 5.30  | 70.0  | ± 9.6 % |
|           |                                                     | Y | 32.35  | 108.98 | 28.96 |       | 70.0  |         |
|           |                                                     | Z | 21.86  | 102.15 | 26.73 |       | 70.0  |         |
| 10037-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH3)               | X | 2.48   | 74.51  | 16.30 | 1.88  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 3.96   | 80.90  | 19.14 |       | 100.0 |         |
|           |                                                     | Z | 2.61   | 74.90  | 16.23 |       | 100.0 |         |
| 10038-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH5)               | X | 1.74   | 71.34  | 14.88 | 1.17  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 2.75   | 77.52  | 17.90 |       | 100.0 |         |
|           |                                                     | Z | 1.82   | 71.77  | 14.82 |       | 100.0 |         |
| 10039-CAB | CDMA2000 (1xRTT, RC1)                               | X | 1.34   | 68.49  | 13.13 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.27   | 75.66  | 16.89 |       | 150.0 |         |
|           |                                                     | Z | 1.29   | 68.35  | 12.80 |       | 150.0 |         |
| 10042-CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate) | X | 34.99  | 94.66  | 19.93 | 7.78  | 50.0  | ± 9.6 % |
|           |                                                     | Y | 100.00 | 108.11 | 23.89 |       | 50.0  |         |
|           |                                                     | Z | 100.00 | 107.01 | 23.40 |       | 50.0  |         |
| 10044-CAA | IS-91/EIA/TIA-553 FDD (FDMA, FM)                    | X | 0.17   | 126.30 | 3.13  | 0.00  | 150.0 | ± 9.6 % |
|           |                                                     | Y | 0.00   | 107.81 | 5.46  |       | 150.0 |         |
|           |                                                     | Z | 0.15   | 126.17 | 2.27  |       | 150.0 |         |
| 10048-CAA | DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)           | X | 10.11  | 79.88  | 18.52 | 13.80 | 25.0  | ± 9.6 % |
|           |                                                     | Y | 23.48  | 91.75  | 22.45 |       | 25.0  |         |
|           |                                                     | Z | 12.25  | 82.71  | 19.92 |       | 25.0  |         |
| 10049-CAA | DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)         | X | 11.72  | 83.69  | 18.67 | 10.79 | 40.0  | ± 9.6 % |
|           |                                                     | Y | 40.84  | 100.05 | 23.71 |       | 40.0  |         |
|           |                                                     | Z | 15.78  | 87.97  | 20.48 |       | 40.0  |         |
| 10056-CAA | UMTS-TDD (TD-SCDMA, 1.28 Mcps)                      | X | 18.86  | 95.31  | 25.05 | 9.03  | 50.0  | ± 9.6 % |
|           |                                                     | Y | 26.98  | 101.35 | 27.04 |       | 50.0  |         |
|           |                                                     | Z | 17.19  | 93.67  | 24.60 |       | 50.0  |         |
| 10058-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)                   | X | 4.30   | 76.01  | 24.21 | 6.55  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 4.66   | 77.31  | 24.71 |       | 100.0 |         |
|           |                                                     | Z | 4.30   | 75.85  | 24.15 |       | 100.0 |         |
| 10059-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)            | X | 1.10   | 64.51  | 15.41 | 0.61  | 110.0 | ± 9.6 % |
|           |                                                     | Y | 1.22   | 65.59  | 16.19 |       | 110.0 |         |
|           |                                                     | Z | 1.11   | 64.78  | 15.58 |       | 110.0 |         |
| 10060-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)          | X | 40.70  | 121.16 | 30.62 | 1.30  | 110.0 | ± 9.6 % |
|           |                                                     | Y | 100.00 | 138.01 | 35.59 |       | 110.0 |         |
|           |                                                     | Z | 76.47  | 130.66 | 32.92 |       | 110.0 |         |

|           |                                                |   |      |       |       |      |       |         |
|-----------|------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10061-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)      | X | 2.97 | 81.68 | 22.34 | 2.04 | 110.0 | ± 9.6 % |
|           |                                                | Y | 3.52 | 84.01 | 23.42 |      | 110.0 |         |
|           |                                                | Z | 3.16 | 82.63 | 22.73 |      | 110.0 |         |
| 10062-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)       | X | 4.54 | 66.50 | 16.38 | 0.49 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.60 | 66.81 | 16.49 |      | 100.0 |         |
|           |                                                | Z | 4.51 | 66.59 | 16.41 |      | 100.0 |         |
| 10063-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)       | X | 4.56 | 66.59 | 16.48 | 0.72 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.62 | 66.89 | 16.58 |      | 100.0 |         |
|           |                                                | Z | 4.53 | 66.70 | 16.52 |      | 100.0 |         |
| 10064-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)      | X | 4.84 | 66.85 | 16.71 | 0.86 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.89 | 67.12 | 16.79 |      | 100.0 |         |
|           |                                                | Z | 4.80 | 66.93 | 16.74 |      | 100.0 |         |
| 10065-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)      | X | 4.71 | 66.74 | 16.80 | 1.21 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.76 | 67.01 | 16.87 |      | 100.0 |         |
|           |                                                | Z | 4.67 | 66.83 | 16.83 |      | 100.0 |         |
| 10066-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)      | X | 4.72 | 66.77 | 16.97 | 1.46 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.77 | 67.02 | 17.03 |      | 100.0 |         |
|           |                                                | Z | 4.69 | 66.86 | 17.00 |      | 100.0 |         |
| 10067-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)      | X | 5.02 | 66.97 | 17.43 | 2.04 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.06 | 67.18 | 17.45 |      | 100.0 |         |
|           |                                                | Z | 4.99 | 67.10 | 17.47 |      | 100.0 |         |
| 10068-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)      | X | 5.06 | 66.99 | 17.64 | 2.55 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.10 | 67.19 | 17.65 |      | 100.0 |         |
|           |                                                | Z | 5.03 | 67.09 | 17.67 |      | 100.0 |         |
| 10069-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)      | X | 5.14 | 67.01 | 17.83 | 2.67 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.18 | 67.19 | 17.83 |      | 100.0 |         |
|           |                                                | Z | 5.11 | 67.11 | 17.86 |      | 100.0 |         |
| 10071-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)  | X | 4.84 | 66.62 | 17.27 | 1.99 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.89 | 66.85 | 17.31 |      | 100.0 |         |
|           |                                                | Z | 4.83 | 66.75 | 17.32 |      | 100.0 |         |
| 10072-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps) | X | 4.82 | 66.93 | 17.48 | 2.30 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.86 | 67.16 | 17.51 |      | 100.0 |         |
|           |                                                | Z | 4.80 | 67.06 | 17.53 |      | 100.0 |         |
| 10073-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps) | X | 4.88 | 67.11 | 17.81 | 2.83 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.92 | 67.32 | 17.83 |      | 100.0 |         |
|           |                                                | Z | 4.87 | 67.25 | 17.87 |      | 100.0 |         |
| 10074-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps) | X | 4.87 | 67.01 | 17.95 | 3.30 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.91 | 67.22 | 17.97 |      | 100.0 |         |
|           |                                                | Z | 4.87 | 67.19 | 18.02 |      | 100.0 |         |
| 10075-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps) | X | 4.90 | 67.11 | 18.25 | 3.82 | 90.0  | ± 9.6 % |
|           |                                                | Y | 4.95 | 67.32 | 18.26 |      | 90.0  |         |
|           |                                                | Z | 4.91 | 67.27 | 18.31 |      | 90.0  |         |
| 10076-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps) | X | 4.92 | 66.92 | 18.38 | 4.15 | 90.0  | ± 9.6 % |
|           |                                                | Y | 4.97 | 67.13 | 18.38 |      | 90.0  |         |
|           |                                                | Z | 4.94 | 67.11 | 18.46 |      | 90.0  |         |
| 10077-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps) | X | 4.95 | 66.99 | 18.48 | 4.30 | 90.0  | ± 9.6 % |
|           |                                                | Y | 5.00 | 67.21 | 18.49 |      | 90.0  |         |
|           |                                                | Z | 4.97 | 67.20 | 18.56 |      | 90.0  |         |

|           |                                                     |   |        |        |       |      |       |         |
|-----------|-----------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10081-CAB | CDMA2000 (1xRTT, RC3)                               | X | 0.61   | 63.26  | 9.90  | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 0.87   | 67.43  | 13.01 |      | 150.0 |         |
|           |                                                     | Z | 0.58   | 63.10  | 9.56  |      | 150.0 |         |
| 10082-CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate) | X | 2.50   | 65.17  | 5.97  | 4.77 | 80.0  | ± 9.6 % |
|           |                                                     | Y | 0.75   | 60.00  | 4.55  |      | 80.0  |         |
|           |                                                     | Z | 0.72   | 60.00  | 4.31  |      | 80.0  |         |
| 10090-DAC | GPRS-FDD (TDMA, GMSK, TN 0-4)                       | X | 100.00 | 107.54 | 23.21 | 6.56 | 60.0  | ± 9.6 % |
|           |                                                     | Y | 100.00 | 110.64 | 24.80 |      | 60.0  |         |
|           |                                                     | Z | 100.00 | 109.67 | 24.33 |      | 60.0  |         |
| 10097-CAB | UMTS-FDD (HSDPA)                                    | X | 1.69   | 67.19  | 15.08 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 1.88   | 68.79  | 16.18 |      | 150.0 |         |
|           |                                                     | Z | 1.71   | 67.59  | 15.23 |      | 150.0 |         |
| 10098-CAB | UMTS-FDD (HSUPA, Subtest 2)                         | X | 1.65   | 67.13  | 15.04 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 1.84   | 68.75  | 16.15 |      | 150.0 |         |
|           |                                                     | Z | 1.67   | 67.53  | 15.19 |      | 150.0 |         |
| 10099-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-4)                       | X | 8.93   | 91.41  | 32.21 | 9.56 | 60.0  | ± 9.6 % |
|           |                                                     | Y | 10.16  | 94.39  | 33.31 |      | 60.0  |         |
|           |                                                     | Z | 8.70   | 90.44  | 31.80 |      | 60.0  |         |
| 10100-CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)            | X | 2.94   | 69.72  | 16.26 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 3.18   | 71.08  | 17.07 |      | 150.0 |         |
|           |                                                     | Z | 2.94   | 69.89  | 16.39 |      | 150.0 |         |
| 10101-CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)          | X | 3.09   | 67.13  | 15.64 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 3.21   | 67.85  | 16.08 |      | 150.0 |         |
|           |                                                     | Z | 3.07   | 67.21  | 15.70 |      | 150.0 |         |
| 10102-CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)          | X | 3.20   | 67.14  | 15.76 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 3.32   | 67.82  | 16.17 |      | 150.0 |         |
|           |                                                     | Z | 3.18   | 67.23  | 15.82 |      | 150.0 |         |
| 10103-CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)            | X | 5.93   | 75.11  | 20.17 | 3.98 | 65.0  | ± 9.6 % |
|           |                                                     | Y | 6.63   | 76.82  | 20.78 |      | 65.0  |         |
|           |                                                     | Z | 5.91   | 75.14  | 20.21 |      | 65.0  |         |
| 10104-CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)          | X | 5.89   | 73.03  | 20.08 | 3.98 | 65.0  | ± 9.6 % |
|           |                                                     | Y | 6.25   | 73.91  | 20.36 |      | 65.0  |         |
|           |                                                     | Z | 5.90   | 73.09  | 20.11 |      | 65.0  |         |
| 10105-CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)          | X | 5.51   | 71.58  | 19.75 | 3.98 | 65.0  | ± 9.6 % |
|           |                                                     | Y | 6.10   | 73.31  | 20.41 |      | 65.0  |         |
|           |                                                     | Z | 5.86   | 72.81  | 20.30 |      | 65.0  |         |
| 10108-CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)            | X | 2.55   | 69.01  | 16.09 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.75   | 70.30  | 16.89 |      | 150.0 |         |
|           |                                                     | Z | 2.54   | 69.20  | 16.22 |      | 150.0 |         |
| 10109-CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)          | X | 2.74   | 66.99  | 15.50 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.87   | 67.79  | 16.01 |      | 150.0 |         |
|           |                                                     | Z | 2.72   | 67.11  | 15.56 |      | 150.0 |         |
| 10110-CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)             | X | 2.04   | 68.09  | 15.59 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.23   | 69.47  | 16.51 |      | 150.0 |         |
|           |                                                     | Z | 2.03   | 68.32  | 15.72 |      | 150.0 |         |
| 10111-CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)           | X | 2.46   | 67.87  | 15.72 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.64   | 69.03  | 16.47 |      | 150.0 |         |
|           |                                                     | Z | 2.45   | 68.15  | 15.81 |      | 150.0 |         |



|           |                                                |   |      |       |       |      |       |         |
|-----------|------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10112-CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)     | X | 2.87 | 67.02 | 15.59 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 3.00 | 67.79 | 16.07 |      | 150.0 |         |
|           |                                                | Z | 2.85 | 67.16 | 15.65 |      | 150.0 |         |
| 10113-CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)      | X | 2.61 | 68.07 | 15.89 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.79 | 69.17 | 16.59 |      | 150.0 |         |
|           |                                                | Z | 2.61 | 68.36 | 15.98 |      | 150.0 |         |
| 10114-CAC | IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)  | X | 5.01 | 67.03 | 16.34 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.06 | 67.33 | 16.45 |      | 150.0 |         |
|           |                                                | Z | 4.97 | 67.05 | 16.35 |      | 150.0 |         |
| 10115-CAC | IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)  | X | 5.27 | 67.10 | 16.38 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.32 | 67.38 | 16.48 |      | 150.0 |         |
|           |                                                | Z | 5.22 | 67.11 | 16.39 |      | 150.0 |         |
| 10116-CAC | IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM) | X | 5.09 | 67.20 | 16.35 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.14 | 67.50 | 16.46 |      | 150.0 |         |
|           |                                                | Z | 5.06 | 67.23 | 16.37 |      | 150.0 |         |
| 10117-CAC | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)       | X | 4.97 | 66.87 | 16.27 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.03 | 67.20 | 16.40 |      | 150.0 |         |
|           |                                                | Z | 4.94 | 66.93 | 16.31 |      | 150.0 |         |
| 10118-CAC | IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)       | X | 5.35 | 67.31 | 16.50 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.39 | 67.55 | 16.57 |      | 150.0 |         |
|           |                                                | Z | 5.30 | 67.32 | 16.50 |      | 150.0 |         |
| 10119-CAC | IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)      | X | 5.08 | 67.16 | 16.34 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.12 | 67.45 | 16.45 |      | 150.0 |         |
|           |                                                | Z | 5.04 | 67.20 | 16.36 |      | 150.0 |         |
| 10140-CAD | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)     | X | 3.23 | 67.13 | 15.67 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 3.35 | 67.82 | 16.08 |      | 150.0 |         |
|           |                                                | Z | 3.21 | 67.22 | 15.73 |      | 150.0 |         |
| 10141-CAD | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)     | X | 3.36 | 67.28 | 15.87 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 3.48 | 67.94 | 16.26 |      | 150.0 |         |
|           |                                                | Z | 3.34 | 67.38 | 15.93 |      | 150.0 |         |
| 10142-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)        | X | 1.80 | 67.92 | 15.04 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.02 | 69.71 | 16.23 |      | 150.0 |         |
|           |                                                | Z | 1.78 | 68.19 | 15.11 |      | 150.0 |         |
| 10143-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)      | X | 2.28 | 68.33 | 15.13 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.56 | 70.16 | 16.27 |      | 150.0 |         |
|           |                                                | Z | 2.27 | 68.61 | 15.13 |      | 150.0 |         |
| 10144-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)      | X | 2.03 | 65.81 | 13.36 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.22 | 67.14 | 14.29 |      | 150.0 |         |
|           |                                                | Z | 1.98 | 65.83 | 13.22 |      | 150.0 |         |
| 10145-CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)      | X | 0.92 | 62.55 | 9.46  | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 1.17 | 65.32 | 11.54 |      | 150.0 |         |
|           |                                                | Z | 0.84 | 61.98 | 8.80  |      | 150.0 |         |
| 10146-CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)    | X | 1.39 | 62.93 | 9.23  | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 1.99 | 66.57 | 11.19 |      | 150.0 |         |
|           |                                                | Z | 1.31 | 62.53 | 8.72  |      | 150.0 |         |
| 10147-CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)    | X | 1.52 | 63.83 | 9.83  | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.52 | 69.22 | 12.51 |      | 150.0 |         |
|           |                                                | Z | 1.42 | 63.36 | 9.28  |      | 150.0 |         |

|           |                                            |   |      |       |       |      |       |         |
|-----------|--------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10149-CAD | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)  | X | 2.75 | 67.05 | 15.55 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.88 | 67.86 | 16.07 |      | 150.0 |         |
|           |                                            | Z | 2.73 | 67.18 | 15.62 |      | 150.0 |         |
| 10150-CAD | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)  | X | 2.88 | 67.08 | 15.63 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.01 | 67.85 | 16.12 |      | 150.0 |         |
|           |                                            | Z | 2.86 | 67.22 | 15.70 |      | 150.0 |         |
| 10151-CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)    | X | 6.32 | 77.90 | 21.36 | 3.98 | 65.0  | ± 9.6 % |
|           |                                            | Y | 6.91 | 79.14 | 21.77 |      | 65.0  |         |
|           |                                            | Z | 6.41 | 78.22 | 21.50 |      | 65.0  |         |
| 10152-CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)  | X | 5.42 | 72.95 | 19.71 | 3.98 | 65.0  | ± 9.6 % |
|           |                                            | Y | 5.78 | 73.88 | 20.03 |      | 65.0  |         |
|           |                                            | Z | 5.43 | 73.04 | 19.72 |      | 65.0  |         |
| 10153-CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)  | X | 5.81 | 74.06 | 20.59 | 3.98 | 65.0  | ± 9.6 % |
|           |                                            | Y | 6.20 | 74.97 | 20.87 |      | 65.0  |         |
|           |                                            | Z | 5.84 | 74.21 | 20.62 |      | 65.0  |         |
| 10154-CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)    | X | 2.09 | 68.53 | 15.87 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.29 | 69.96 | 16.81 |      | 150.0 |         |
|           |                                            | Z | 2.08 | 68.78 | 15.99 |      | 150.0 |         |
| 10155-CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)  | X | 2.46 | 67.89 | 15.74 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.64 | 69.05 | 16.49 |      | 150.0 |         |
|           |                                            | Z | 2.46 | 68.18 | 15.84 |      | 150.0 |         |
| 10156-CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)     | X | 1.63 | 67.76 | 14.61 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 1.89 | 69.98 | 16.07 |      | 150.0 |         |
|           |                                            | Z | 1.61 | 67.98 | 14.81 |      | 150.0 |         |
| 10157-CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)   | X | 1.84 | 66.10 | 13.16 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.08 | 67.93 | 14.40 |      | 150.0 |         |
|           |                                            | Z | 1.79 | 66.07 | 12.96 |      | 150.0 |         |
| 10158-CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)  | X | 2.62 | 68.14 | 15.95 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.80 | 69.25 | 16.65 |      | 150.0 |         |
|           |                                            | Z | 2.62 | 68.44 | 16.04 |      | 150.0 |         |
| 10159-CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)   | X | 1.94 | 66.53 | 13.44 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.21 | 68.50 | 14.73 |      | 150.0 |         |
|           |                                            | Z | 1.88 | 66.49 | 13.23 |      | 150.0 |         |
| 10160-CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)    | X | 2.59 | 68.31 | 15.97 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.73 | 69.19 | 16.57 |      | 150.0 |         |
|           |                                            | Z | 2.58 | 68.51 | 16.08 |      | 150.0 |         |
| 10161-CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)  | X | 2.77 | 67.03 | 15.54 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.91 | 67.84 | 16.05 |      | 150.0 |         |
|           |                                            | Z | 2.75 | 67.18 | 15.60 |      | 150.0 |         |
| 10162-CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)  | X | 2.88 | 67.21 | 15.67 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.02 | 68.01 | 16.17 |      | 150.0 |         |
|           |                                            | Z | 2.86 | 67.38 | 15.74 |      | 150.0 |         |
| 10166-CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)   | X | 3.37 | 69.04 | 18.77 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.72 | 71.09 | 19.82 |      | 150.0 |         |
|           |                                            | Z | 3.38 | 69.53 | 19.11 |      | 150.0 |         |
| 10167-CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | X | 4.04 | 71.49 | 19.00 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 5.05 | 75.77 | 20.88 |      | 150.0 |         |
|           |                                            | Z | 4.12 | 72.30 | 19.44 |      | 150.0 |         |

|           |                                            |   |       |        |       |      |       |         |
|-----------|--------------------------------------------|---|-------|--------|-------|------|-------|---------|
| 10168-CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | X | 4.56  | 74.09  | 20.53 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 5.99  | 79.40  | 22.74 |      | 150.0 |         |
|           |                                            | Z | 4.72  | 75.27  | 21.13 |      | 150.0 |         |
| 10169-CAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)      | X | 2.74  | 67.94  | 18.26 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.25  | 71.55  | 20.05 |      | 150.0 |         |
|           |                                            | Z | 2.77  | 68.38  | 18.59 |      | 150.0 |         |
| 10170-CAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)    | X | 3.65  | 73.29  | 20.42 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 6.00  | 83.03  | 24.31 |      | 150.0 |         |
|           |                                            | Z | 3.81  | 74.44  | 21.04 |      | 150.0 |         |
| 10171-AAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)    | X | 2.98  | 69.09  | 17.51 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.17  | 75.40  | 20.24 |      | 150.0 |         |
|           |                                            | Z | 3.05  | 69.77  | 17.92 |      | 150.0 |         |
| 10172-CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)      | X | 6.26  | 85.95  | 26.48 | 6.02 | 65.0  | ± 9.6 % |
|           |                                            | Y | 13.49 | 101.43 | 31.66 |      | 65.0  |         |
|           |                                            | Z | 6.07  | 85.72  | 26.58 |      | 65.0  |         |
| 10173-CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)    | X | 11.36 | 93.09  | 26.93 | 6.02 | 65.0  | ± 9.6 % |
|           |                                            | Y | 61.90 | 122.46 | 34.86 |      | 65.0  |         |
|           |                                            | Z | 13.00 | 96.00  | 28.02 |      | 65.0  |         |
| 10174-CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)    | X | 8.36  | 86.77  | 24.30 | 6.02 | 65.0  | ± 9.6 % |
|           |                                            | Y | 35.10 | 110.72 | 31.17 |      | 65.0  |         |
|           |                                            | Z | 8.86  | 88.32  | 24.99 |      | 65.0  |         |
| 10175-CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)      | X | 2.71  | 67.63  | 18.00 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.19  | 71.11  | 19.75 |      | 150.0 |         |
|           |                                            | Z | 2.74  | 68.04  | 18.32 |      | 150.0 |         |
| 10176-CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)    | X | 3.66  | 73.32  | 20.43 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 6.01  | 83.07  | 24.33 |      | 150.0 |         |
|           |                                            | Z | 3.81  | 74.46  | 21.05 |      | 150.0 |         |
| 10177-CAG | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)       | X | 2.73  | 67.78  | 18.10 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.23  | 71.31  | 19.86 |      | 150.0 |         |
|           |                                            | Z | 2.76  | 68.20  | 18.41 |      | 150.0 |         |
| 10178-CAE | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)     | X | 3.63  | 73.10  | 20.31 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 5.90  | 82.67  | 24.15 |      | 150.0 |         |
|           |                                            | Z | 3.78  | 74.24  | 20.93 |      | 150.0 |         |
| 10179-CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)    | X | 3.28  | 71.01  | 18.80 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.94  | 78.87  | 22.07 |      | 150.0 |         |
|           |                                            | Z | 3.38  | 71.91  | 19.31 |      | 150.0 |         |
| 10180-CAE | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)     | X | 2.98  | 69.03  | 17.47 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.15  | 75.28  | 20.17 |      | 150.0 |         |
|           |                                            | Z | 3.04  | 69.71  | 17.88 |      | 150.0 |         |
| 10181-CAD | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)      | X | 2.73  | 67.76  | 18.09 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.22  | 71.29  | 19.85 |      | 150.0 |         |
|           |                                            | Z | 2.75  | 68.18  | 18.41 |      | 150.0 |         |
| 10182-CAD | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)    | X | 3.62  | 73.08  | 20.30 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 5.88  | 82.63  | 24.13 |      | 150.0 |         |
|           |                                            | Z | 3.77  | 74.21  | 20.92 |      | 150.0 |         |
| 10183-AAC | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)    | X | 2.97  | 69.01  | 17.46 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.14  | 75.24  | 20.16 |      | 150.0 |         |
|           |                                            | Z | 3.04  | 69.68  | 17.87 |      | 150.0 |         |

|           |                                               |   |      |       |       |      |       |         |
|-----------|-----------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10184-CAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)          | X | 2.74 | 67.80 | 18.11 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 3.24 | 71.35 | 19.88 |      | 150.0 |         |
|           |                                               | Z | 2.77 | 68.22 | 18.43 |      | 150.0 |         |
| 10185-CAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)        | X | 3.64 | 73.15 | 20.34 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 5.93 | 82.75 | 24.19 |      | 150.0 |         |
|           |                                               | Z | 3.79 | 74.29 | 20.96 |      | 150.0 |         |
| 10186-AAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)        | X | 2.99 | 69.07 | 17.49 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.16 | 75.34 | 20.20 |      | 150.0 |         |
|           |                                               | Z | 3.05 | 69.75 | 17.90 |      | 150.0 |         |
| 10187-CAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)        | X | 2.75 | 67.86 | 18.18 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 3.25 | 71.43 | 19.96 |      | 150.0 |         |
|           |                                               | Z | 2.78 | 68.29 | 18.51 |      | 150.0 |         |
| 10188-CAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)      | X | 3.76 | 73.83 | 20.74 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 6.30 | 84.02 | 24.77 |      | 150.0 |         |
|           |                                               | Z | 3.92 | 75.04 | 21.38 |      | 150.0 |         |
| 10189-AAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)      | X | 3.05 | 69.47 | 17.77 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.32 | 76.05 | 20.59 |      | 150.0 |         |
|           |                                               | Z | 3.12 | 70.18 | 18.19 |      | 150.0 |         |
| 10193-CAC | IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)  | X | 4.39 | 66.44 | 16.00 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.46 | 66.83 | 16.18 |      | 150.0 |         |
|           |                                               | Z | 4.36 | 66.53 | 16.02 |      | 150.0 |         |
| 10194-CAC | IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM) | X | 4.55 | 66.74 | 16.13 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.63 | 67.12 | 16.30 |      | 150.0 |         |
|           |                                               | Z | 4.51 | 66.81 | 16.16 |      | 150.0 |         |
| 10195-CAC | IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM) | X | 4.59 | 66.77 | 16.15 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.67 | 67.15 | 16.32 |      | 150.0 |         |
|           |                                               | Z | 4.55 | 66.84 | 16.18 |      | 150.0 |         |
| 10196-CAC | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)       | X | 4.39 | 66.48 | 16.01 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.46 | 66.87 | 16.19 |      | 150.0 |         |
|           |                                               | Z | 4.35 | 66.57 | 16.03 |      | 150.0 |         |
| 10197-CAC | IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)      | X | 4.56 | 66.75 | 16.14 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.64 | 67.14 | 16.31 |      | 150.0 |         |
|           |                                               | Z | 4.53 | 66.83 | 16.17 |      | 150.0 |         |
| 10198-CAC | IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)      | X | 4.59 | 66.78 | 16.16 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.67 | 67.16 | 16.33 |      | 150.0 |         |
|           |                                               | Z | 4.55 | 66.85 | 16.19 |      | 150.0 |         |
| 10219-CAC | IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)       | X | 4.34 | 66.50 | 15.97 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.41 | 66.90 | 16.15 |      | 150.0 |         |
|           |                                               | Z | 4.30 | 66.59 | 15.99 |      | 150.0 |         |
| 10220-CAC | IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)    | X | 4.56 | 66.72 | 16.13 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.63 | 67.10 | 16.30 |      | 150.0 |         |
|           |                                               | Z | 4.52 | 66.79 | 16.15 |      | 150.0 |         |
| 10221-CAC | IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)    | X | 4.60 | 66.71 | 16.14 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.67 | 67.09 | 16.31 |      | 150.0 |         |
|           |                                               | Z | 4.56 | 66.79 | 16.17 |      | 150.0 |         |
| 10222-CAC | IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)        | X | 4.94 | 66.87 | 16.27 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 5.00 | 67.20 | 16.40 |      | 150.0 |         |
|           |                                               | Z | 4.91 | 66.93 | 16.30 |      | 150.0 |         |

|           |                                           |   |       |        |       |      |       |         |
|-----------|-------------------------------------------|---|-------|--------|-------|------|-------|---------|
| 10223-CAC | IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)  | X | 5.26  | 67.15  | 16.43 | 0.00 | 150.0 | ± 9.6 % |
|           |                                           | Y | 5.29  | 67.39  | 16.51 |      | 150.0 |         |
|           |                                           | Z | 5.21  | 67.16  | 16.44 |      | 150.0 |         |
| 10224-CAC | IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM) | X | 4.98  | 66.98  | 16.25 | 0.00 | 150.0 | ± 9.6 % |
|           |                                           | Y | 5.05  | 67.32  | 16.38 |      | 150.0 |         |
|           |                                           | Z | 4.95  | 67.03  | 16.28 |      | 150.0 |         |
| 10225-CAB | UMTS-FDD (HSPA+)                          | X | 2.65  | 65.82  | 14.94 | 0.00 | 150.0 | ± 9.6 % |
|           |                                           | Y | 2.77  | 66.54  | 15.42 |      | 150.0 |         |
|           |                                           | Z | 2.63  | 65.96  | 14.93 |      | 150.0 |         |
| 10226-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)  | X | 12.29 | 94.61  | 27.52 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 76.74 | 126.49 | 35.96 |      | 65.0  |         |
|           |                                           | Z | 14.23 | 97.75  | 28.67 |      | 65.0  |         |
| 10227-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)  | X | 11.60 | 92.16  | 26.09 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 58.51 | 119.10 | 33.33 |      | 65.0  |         |
|           |                                           | Z | 13.58 | 95.42  | 27.28 |      | 65.0  |         |
| 10228-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)    | X | 8.07  | 91.29  | 28.44 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 14.98 | 103.75 | 32.45 |      | 65.0  |         |
|           |                                           | Z | 8.37  | 92.43  | 29.01 |      | 65.0  |         |
| 10229-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)    | X | 11.46 | 93.21  | 26.98 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 62.74 | 122.68 | 34.92 |      | 65.0  |         |
|           |                                           | Z | 13.11 | 96.13  | 28.07 |      | 65.0  |         |
| 10230-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)    | X | 10.78 | 90.84  | 25.59 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 48.68 | 115.84 | 32.42 |      | 65.0  |         |
|           |                                           | Z | 12.46 | 93.85  | 26.71 |      | 65.0  |         |
| 10231-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)      | X | 7.66  | 90.18  | 27.97 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 13.86 | 102.08 | 31.86 |      | 65.0  |         |
|           |                                           | Z | 7.92  | 91.24  | 28.52 |      | 65.0  |         |
| 10232-CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)    | X | 11.44 | 93.19  | 26.97 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 62.67 | 122.68 | 34.92 |      | 65.0  |         |
|           |                                           | Z | 13.08 | 96.11  | 28.07 |      | 65.0  |         |
| 10233-CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)    | X | 10.75 | 90.81  | 25.58 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 48.50 | 115.79 | 32.41 |      | 65.0  |         |
|           |                                           | Z | 12.42 | 93.82  | 26.70 |      | 65.0  |         |
| 10234-CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)      | X | 7.34  | 89.19  | 27.51 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 12.98 | 100.59 | 31.27 |      | 65.0  |         |
|           |                                           | Z | 7.57  | 90.21  | 28.04 |      | 65.0  |         |
| 10235-CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)   | X | 11.45 | 93.23  | 26.99 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 63.03 | 122.79 | 34.95 |      | 65.0  |         |
|           |                                           | Z | 13.11 | 96.15  | 28.08 |      | 65.0  |         |
| 10236-CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)   | X | 10.87 | 90.96  | 25.62 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 49.65 | 116.13 | 32.49 |      | 65.0  |         |
|           |                                           | Z | 12.57 | 93.99  | 26.75 |      | 65.0  |         |
| 10237-CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)     | X | 7.67  | 90.24  | 28.00 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 13.91 | 102.19 | 31.90 |      | 65.0  |         |
|           |                                           | Z | 7.93  | 91.30  | 28.54 |      | 65.0  |         |
| 10238-CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)   | X | 11.41 | 93.16  | 26.96 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 62.56 | 122.66 | 34.91 |      | 65.0  |         |
|           |                                           | Z | 13.06 | 96.08  | 28.06 |      | 65.0  |         |

|           |                                            |   |       |        |       |      |      |         |
|-----------|--------------------------------------------|---|-------|--------|-------|------|------|---------|
| 10239-CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)    | X | 10.72 | 90.78  | 25.57 | 6.02 | 65.0 | ± 9.6 % |
|           |                                            | Y | 48.29 | 115.74 | 32.40 |      | 65.0 |         |
|           |                                            | Z | 12.38 | 93.78  | 26.69 |      | 65.0 |         |
| 10240-CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)      | X | 7.65  | 90.20  | 27.98 | 6.02 | 65.0 | ± 9.6 % |
|           |                                            | Y | 13.86 | 102.14 | 31.88 |      | 65.0 |         |
|           |                                            | Z | 7.91  | 91.26  | 28.53 |      | 65.0 |         |
| 10241-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | X | 7.49  | 79.94  | 24.73 | 6.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 9.15  | 84.52  | 26.53 |      | 65.0 |         |
|           |                                            | Z | 7.78  | 81.10  | 25.24 |      | 65.0 |         |
| 10242-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | X | 6.76  | 77.82  | 23.76 | 6.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 8.56  | 83.16  | 25.93 |      | 65.0 |         |
|           |                                            | Z | 7.57  | 80.56  | 24.94 |      | 65.0 |         |
| 10243-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)   | X | 5.55  | 74.73  | 23.33 | 6.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 6.44  | 78.27  | 24.91 |      | 65.0 |         |
|           |                                            | Z | 5.56  | 75.03  | 23.50 |      | 65.0 |         |
| 10244-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)   | X | 4.91  | 73.06  | 16.84 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 6.23  | 76.34  | 18.14 |      | 65.0 |         |
|           |                                            | Z | 4.96  | 73.17  | 16.71 |      | 65.0 |         |
| 10245-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)   | X | 4.78  | 72.39  | 16.50 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 5.96  | 75.43  | 17.72 |      | 65.0 |         |
|           |                                            | Z | 4.79  | 72.41  | 16.32 |      | 65.0 |         |
| 10246-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)     | X | 4.86  | 76.58  | 18.54 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 5.74  | 78.81  | 19.49 |      | 65.0 |         |
|           |                                            | Z | 4.75  | 76.10  | 18.16 |      | 65.0 |         |
| 10247-CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)   | X | 4.54  | 72.63  | 17.68 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 5.00  | 73.89  | 18.23 |      | 65.0 |         |
|           |                                            | Z | 4.50  | 72.44  | 17.41 |      | 65.0 |         |
| 10248-CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)   | X | 4.51  | 72.01  | 17.39 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 4.93  | 73.18  | 17.90 |      | 65.0 |         |
|           |                                            | Z | 4.45  | 71.77  | 17.09 |      | 65.0 |         |
| 10249-CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)     | X | 6.38  | 81.20  | 21.41 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 7.34  | 83.11  | 22.13 |      | 65.0 |         |
|           |                                            | Z | 6.46  | 81.34  | 21.34 |      | 65.0 |         |
| 10250-CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)  | X | 5.54  | 75.67  | 20.83 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 5.99  | 76.71  | 21.17 |      | 65.0 |         |
|           |                                            | Z | 5.60  | 75.87  | 20.83 |      | 65.0 |         |
| 10251-CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)  | X | 5.22  | 73.28  | 19.41 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 5.60  | 74.26  | 19.76 |      | 65.0 |         |
|           |                                            | Z | 5.22  | 73.35  | 19.34 |      | 65.0 |         |
| 10252-CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)    | X | 6.60  | 81.03  | 22.49 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 7.35  | 82.49  | 22.99 |      | 65.0 |         |
|           |                                            | Z | 6.74  | 81.46  | 22.63 |      | 65.0 |         |
| 10253-CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)  | X | 5.32  | 72.45  | 19.46 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 5.67  | 73.38  | 19.78 |      | 65.0 |         |
|           |                                            | Z | 5.34  | 72.58  | 19.46 |      | 65.0 |         |
| 10254-CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)  | X | 5.67  | 73.46  | 20.23 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 6.04  | 74.36  | 20.52 |      | 65.0 |         |
|           |                                            | Z | 5.70  | 73.62  | 20.25 |      | 65.0 |         |

|           |                                             |   |      |       |       |      |      |         |
|-----------|---------------------------------------------|---|------|-------|-------|------|------|---------|
| 10255-CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)     | X | 6.00 | 77.17 | 21.28 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 6.54 | 78.36 | 21.67 |      | 65.0 |         |
|           |                                             | Z | 6.09 | 77.51 | 21.41 |      | 65.0 |         |
| 10256-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM) | X | 3.55 | 68.31 | 13.56 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 4.31 | 70.70 | 14.63 |      | 65.0 |         |
|           |                                             | Z | 3.47 | 67.95 | 13.18 |      | 65.0 |         |
| 10257-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) | X | 3.46 | 67.65 | 13.15 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 4.12 | 69.78 | 14.12 |      | 65.0 |         |
|           |                                             | Z | 3.37 | 67.24 | 12.73 |      | 65.0 |         |
| 10258-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)   | X | 3.31 | 70.56 | 15.03 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 3.93 | 72.68 | 16.08 |      | 65.0 |         |
|           |                                             | Z | 3.14 | 69.68 | 14.40 |      | 65.0 |         |
| 10259-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)   | X | 4.95 | 73.85 | 18.86 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 5.40 | 75.01 | 19.32 |      | 65.0 |         |
|           |                                             | Z | 4.95 | 73.84 | 18.70 |      | 65.0 |         |
| 10260-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)   | X | 4.97 | 73.54 | 18.73 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 5.40 | 74.66 | 19.18 |      | 65.0 |         |
|           |                                             | Z | 4.96 | 73.50 | 18.55 |      | 65.0 |         |
| 10261-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)     | X | 6.09 | 80.15 | 21.50 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 6.88 | 81.79 | 22.11 |      | 65.0 |         |
|           |                                             | Z | 6.20 | 80.42 | 21.51 |      | 65.0 |         |
| 10262-CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)   | X | 5.53 | 75.60 | 20.77 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 5.97 | 76.64 | 21.12 |      | 65.0 |         |
|           |                                             | Z | 5.58 | 75.79 | 20.77 |      | 65.0 |         |
| 10263-CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)   | X | 5.21 | 73.26 | 19.40 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 5.59 | 74.24 | 19.76 |      | 65.0 |         |
|           |                                             | Z | 5.21 | 73.32 | 19.33 |      | 65.0 |         |
| 10264-CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)     | X | 6.52 | 80.79 | 22.38 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 7.26 | 82.25 | 22.87 |      | 65.0 |         |
|           |                                             | Z | 6.65 | 81.20 | 22.51 |      | 65.0 |         |
| 10265-CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)  | X | 5.42 | 72.95 | 19.72 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 5.78 | 73.89 | 20.03 |      | 65.0 |         |
|           |                                             | Z | 5.43 | 73.04 | 19.72 |      | 65.0 |         |
| 10266-CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)  | X | 5.81 | 74.04 | 20.57 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 6.19 | 74.96 | 20.86 |      | 65.0 |         |
|           |                                             | Z | 5.84 | 74.19 | 20.60 |      | 65.0 |         |
| 10267-CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)    | X | 6.31 | 77.85 | 21.33 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 6.90 | 79.09 | 21.75 |      | 65.0 |         |
|           |                                             | Z | 6.39 | 78.16 | 21.48 |      | 65.0 |         |
| 10268-CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)  | X | 6.05 | 72.91 | 20.14 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 6.40 | 73.76 | 20.40 |      | 65.0 |         |
|           |                                             | Z | 6.06 | 73.00 | 20.17 |      | 65.0 |         |
| 10269-CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)  | X | 6.03 | 72.50 | 20.01 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 6.37 | 73.34 | 20.27 |      | 65.0 |         |
|           |                                             | Z | 6.05 | 72.60 | 20.04 |      | 65.0 |         |
| 10270-CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)    | X | 6.14 | 75.03 | 20.36 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 6.59 | 76.06 | 20.69 |      | 65.0 |         |
|           |                                             | Z | 6.19 | 75.26 | 20.47 |      | 65.0 |         |

|           |                                                                    |   |       |       |       |      |       |         |
|-----------|--------------------------------------------------------------------|---|-------|-------|-------|------|-------|---------|
| 10274-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)                          | X | 2.45  | 66.18 | 14.83 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 2.58  | 67.05 | 15.42 |      | 150.0 |         |
|           |                                                                    | Z | 2.44  | 66.39 | 14.86 |      | 150.0 |         |
| 10275-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)                           | X | 1.45  | 67.15 | 14.79 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.65  | 68.98 | 16.07 |      | 150.0 |         |
|           |                                                                    | Z | 1.46  | 67.49 | 14.94 |      | 150.0 |         |
| 10277-CAA | PHS (QPSK)                                                         | X | 2.05  | 60.99 | 6.61  | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 2.14  | 61.42 | 6.98  |      | 50.0  |         |
|           |                                                                    | Z | 2.15  | 61.21 | 6.84  |      | 50.0  |         |
| 10278-CAA | PHS (QPSK, BW 884MHz, Rolloff 0.5)                                 | X | 3.88  | 69.24 | 13.58 | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 4.38  | 71.00 | 14.54 |      | 50.0  |         |
|           |                                                                    | Z | 3.84  | 68.69 | 13.30 |      | 50.0  |         |
| 10279-CAA | PHS (QPSK, BW 884MHz, Rolloff 0.38)                                | X | 4.00  | 69.55 | 13.78 | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 4.51  | 71.31 | 14.73 |      | 50.0  |         |
|           |                                                                    | Z | 3.94  | 68.96 | 13.47 |      | 50.0  |         |
| 10290-AAB | CDMA2000, RC1, SO55, Full Rate                                     | X | 1.07  | 65.69 | 11.52 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.53  | 70.26 | 14.37 |      | 150.0 |         |
|           |                                                                    | Z | 1.01  | 65.37 | 11.10 |      | 150.0 |         |
| 10291-AAB | CDMA2000, RC3, SO55, Full Rate                                     | X | 0.60  | 63.10 | 9.79  | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 0.85  | 67.12 | 12.84 |      | 150.0 |         |
|           |                                                                    | Z | 0.57  | 62.93 | 9.45  |      | 150.0 |         |
| 10292-AAB | CDMA2000, RC3, SO32, Full Rate                                     | X | 0.74  | 66.24 | 11.75 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.46  | 75.17 | 16.76 |      | 150.0 |         |
|           |                                                                    | Z | 0.73  | 66.36 | 11.54 |      | 150.0 |         |
| 10293-AAB | CDMA2000, RC3, SO3, Full Rate                                      | X | 1.24  | 72.67 | 15.10 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 5.17  | 93.05 | 23.35 |      | 150.0 |         |
|           |                                                                    | Z | 1.42  | 74.33 | 15.45 |      | 150.0 |         |
| 10295-AAB | CDMA2000, RC1, SO3, 1/8th Rate 25 fr.                              | X | 9.92  | 85.20 | 23.12 | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 9.50  | 84.91 | 23.23 |      | 50.0  |         |
|           |                                                                    | Z | 10.83 | 86.02 | 23.20 |      | 50.0  |         |
| 10297-AAC | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)                            | X | 2.57  | 69.12 | 16.16 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 2.77  | 70.42 | 16.97 |      | 150.0 |         |
|           |                                                                    | Z | 2.55  | 69.32 | 16.30 |      | 150.0 |         |
| 10298-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)                             | X | 1.27  | 65.66 | 12.33 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.58  | 68.64 | 14.32 |      | 150.0 |         |
|           |                                                                    | Z | 1.21  | 65.43 | 11.98 |      | 150.0 |         |
| 10299-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)                           | X | 2.00  | 66.49 | 12.18 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 3.31  | 72.57 | 14.96 |      | 150.0 |         |
|           |                                                                    | Z | 1.99  | 66.70 | 12.06 |      | 150.0 |         |
| 10300-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)                           | X | 1.58  | 63.09 | 9.74  | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.99  | 65.54 | 11.08 |      | 150.0 |         |
|           |                                                                    | Z | 1.51  | 62.92 | 9.42  |      | 150.0 |         |
| 10301-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC)                 | X | 4.69  | 65.76 | 17.48 | 4.17 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 4.64  | 65.55 | 17.37 |      | 50.0  |         |
|           |                                                                    | Z | 4.67  | 65.93 | 17.49 |      | 50.0  |         |
| 10302-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols) | X | 5.09  | 65.93 | 17.93 | 4.96 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 5.12  | 66.18 | 18.09 |      | 50.0  |         |
|           |                                                                    | Z | 5.09  | 66.17 | 17.98 |      | 50.0  |         |



|           |                                                                     |   |      |       |       |       |       |         |
|-----------|---------------------------------------------------------------------|---|------|-------|-------|-------|-------|---------|
| 10303-AAA | IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)                 | X | 4.84 | 65.58 | 17.76 | 4.96  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 4.88 | 65.83 | 17.92 |       | 50.0  |         |
|           |                                                                     | Z | 4.85 | 65.84 | 17.81 |       | 50.0  |         |
| 10304-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)                 | X | 4.65 | 65.44 | 17.26 | 4.17  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 4.69 | 65.73 | 17.44 |       | 50.0  |         |
|           |                                                                     | Z | 4.65 | 65.69 | 17.31 |       | 50.0  |         |
| 10305-AAA | IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols)    | X | 4.44 | 68.14 | 19.56 | 6.02  | 35.0  | ± 9.6 % |
|           |                                                                     | Y | 4.41 | 68.01 | 19.60 |       | 35.0  |         |
|           |                                                                     | Z | 4.62 | 69.17 | 19.86 |       | 35.0  |         |
| 10306-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols)    | X | 4.68 | 66.85 | 19.08 | 6.02  | 35.0  | ± 9.6 % |
|           |                                                                     | Y | 4.67 | 66.81 | 19.12 |       | 35.0  |         |
|           |                                                                     | Z | 4.77 | 67.53 | 19.30 |       | 35.0  |         |
| 10307-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols)     | X | 4.59 | 67.04 | 19.05 | 6.02  | 35.0  | ± 9.6 % |
|           |                                                                     | Y | 4.58 | 66.99 | 19.09 |       | 35.0  |         |
|           |                                                                     | Z | 4.69 | 67.75 | 19.27 |       | 35.0  |         |
| 10308-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)                | X | 4.57 | 67.28 | 19.21 | 6.02  | 35.0  | ± 9.6 % |
|           |                                                                     | Y | 4.56 | 67.23 | 19.25 |       | 35.0  |         |
|           |                                                                     | Z | 4.69 | 68.04 | 19.45 |       | 35.0  |         |
| 10309-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols) | X | 4.73 | 67.04 | 19.22 | 6.02  | 35.0  | ± 9.6 % |
|           |                                                                     | Y | 4.72 | 66.99 | 19.24 |       | 35.0  |         |
|           |                                                                     | Z | 4.82 | 67.69 | 19.42 |       | 35.0  |         |
| 10310-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols)  | X | 4.63 | 66.94 | 19.07 | 6.02  | 35.0  | ± 9.6 % |
|           |                                                                     | Y | 4.63 | 66.90 | 19.11 |       | 35.0  |         |
|           |                                                                     | Z | 4.74 | 67.65 | 19.30 |       | 35.0  |         |
| 10311-AAC | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)                            | X | 2.92 | 68.38 | 15.85 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 3.14 | 69.67 | 16.60 |       | 150.0 |         |
|           |                                                                     | Z | 2.91 | 68.56 | 15.97 |       | 150.0 |         |
| 10313-AAA | IDEN 1:3                                                            | X | 2.95 | 70.69 | 14.66 | 6.99  | 70.0  | ± 9.6 % |
|           |                                                                     | Y | 3.98 | 74.43 | 16.48 |       | 70.0  |         |
|           |                                                                     | Z | 3.15 | 71.48 | 15.14 |       | 70.0  |         |
| 10314-AAA | IDEN 1:6                                                            | X | 5.04 | 79.92 | 21.00 | 10.00 | 30.0  | ± 9.6 % |
|           |                                                                     | Y | 6.78 | 84.92 | 23.16 |       | 30.0  |         |
|           |                                                                     | Z | 5.73 | 81.64 | 21.73 |       | 30.0  |         |
| 10315-AAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)           | X | 0.97 | 63.25 | 14.68 | 0.17  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 1.08 | 64.33 | 15.52 |       | 150.0 |         |
|           |                                                                     | Z | 0.98 | 63.49 | 14.85 |       | 150.0 |         |
| 10316-AAB | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)       | X | 4.44 | 66.48 | 16.13 | 0.17  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.51 | 66.82 | 16.27 |       | 150.0 |         |
|           |                                                                     | Z | 4.41 | 66.56 | 16.16 |       | 150.0 |         |
| 10317-AAC | IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)             | X | 4.44 | 66.48 | 16.13 | 0.17  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.51 | 66.82 | 16.27 |       | 150.0 |         |
|           |                                                                     | Z | 4.41 | 66.56 | 16.16 |       | 150.0 |         |
| 10400-AAD | IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)                 | X | 4.53 | 66.78 | 16.11 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.61 | 67.15 | 16.28 |       | 150.0 |         |
|           |                                                                     | Z | 4.49 | 66.84 | 16.14 |       | 150.0 |         |
| 10401-AAD | IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)                 | X | 5.27 | 67.03 | 16.34 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 5.28 | 67.17 | 16.36 |       | 150.0 |         |
|           |                                                                     | Z | 5.22 | 67.01 | 16.33 |       | 150.0 |         |

|           |                                                                                 |   |        |        |       |      |       |         |
|-----------|---------------------------------------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10402-AAD | IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)                             | X | 5.50   | 67.24  | 16.31 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 5.56   | 67.57  | 16.43 |      | 150.0 |         |
|           |                                                                                 | Z | 5.47   | 67.27  | 16.33 |      | 150.0 |         |
| 10403-AAB | CDMA2000 (1xEV-DO, Rev. 0)                                                      | X | 1.07   | 65.69  | 11.52 | 0.00 | 115.0 | ± 9.6 % |
|           |                                                                                 | Y | 1.53   | 70.26  | 14.37 |      | 115.0 |         |
|           |                                                                                 | Z | 1.01   | 65.37  | 11.10 |      | 115.0 |         |
| 10404-AAB | CDMA2000 (1xEV-DO, Rev. A)                                                      | X | 1.07   | 65.69  | 11.52 | 0.00 | 115.0 | ± 9.6 % |
|           |                                                                                 | Y | 1.53   | 70.26  | 14.37 |      | 115.0 |         |
|           |                                                                                 | Z | 1.01   | 65.37  | 11.10 |      | 115.0 |         |
| 10406-AAB | CDMA2000, RC3, SO32, SCH0, Full Rate                                            | X | 23.46  | 102.23 | 25.39 | 0.00 | 100.0 | ± 9.6 % |
|           |                                                                                 | Y | 100.00 | 115.29 | 27.21 |      | 100.0 |         |
|           |                                                                                 | Z | 100.00 | 120.73 | 29.57 |      | 100.0 |         |
| 10410-AAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9, Subframe Conf=4) | X | 55.06  | 113.36 | 27.76 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                                 | Y | 100.00 | 120.25 | 29.20 |      | 80.0  |         |
|           |                                                                                 | Z | 100.00 | 122.59 | 30.17 |      | 80.0  |         |
| 10415-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)                       | X | 0.91   | 62.47  | 14.11 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 1.00   | 63.52  | 14.99 |      | 150.0 |         |
|           |                                                                                 | Z | 0.91   | 62.68  | 14.27 |      | 150.0 |         |
| 10416-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)                   | X | 4.39   | 66.47  | 16.07 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 4.46   | 66.85  | 16.24 |      | 150.0 |         |
|           |                                                                                 | Z | 4.36   | 66.56  | 16.10 |      | 150.0 |         |
| 10417-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)                       | X | 4.39   | 66.47  | 16.07 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 4.46   | 66.85  | 16.24 |      | 150.0 |         |
|           |                                                                                 | Z | 4.36   | 66.56  | 16.10 |      | 150.0 |         |
| 10418-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)   | X | 4.38   | 66.64  | 16.10 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 4.46   | 67.04  | 16.28 |      | 150.0 |         |
|           |                                                                                 | Z | 4.35   | 66.74  | 16.14 |      | 150.0 |         |
| 10419-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble)  | X | 4.40   | 66.59  | 16.10 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 4.48   | 66.98  | 16.27 |      | 150.0 |         |
|           |                                                                                 | Z | 4.37   | 66.68  | 16.13 |      | 150.0 |         |
| 10422-AAB | IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)                                    | X | 4.51   | 66.58  | 16.11 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 4.59   | 66.96  | 16.28 |      | 150.0 |         |
|           |                                                                                 | Z | 4.48   | 66.67  | 16.14 |      | 150.0 |         |
| 10423-AAB | IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)                                 | X | 4.67   | 66.88  | 16.22 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 4.74   | 67.25  | 16.38 |      | 150.0 |         |
|           |                                                                                 | Z | 4.62   | 66.95  | 16.24 |      | 150.0 |         |
| 10424-AAB | IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)                                 | X | 4.59   | 66.83  | 16.19 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 4.67   | 67.21  | 16.36 |      | 150.0 |         |
|           |                                                                                 | Z | 4.55   | 66.90  | 16.22 |      | 150.0 |         |
| 10425-AAB | IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)                                     | X | 5.20   | 67.12  | 16.39 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 5.25   | 67.39  | 16.48 |      | 150.0 |         |
|           |                                                                                 | Z | 5.17   | 67.16  | 16.41 |      | 150.0 |         |
| 10426-AAB | IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)                                   | X | 5.23   | 67.21  | 16.43 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 5.26   | 67.44  | 16.50 |      | 150.0 |         |
|           |                                                                                 | Z | 5.19   | 67.25  | 16.45 |      | 150.0 |         |

|           |                                                                |   |        |        |       |      |       |         |
|-----------|----------------------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10427-AAB | IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)                 | X | 5.23   | 67.14  | 16.39 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 5.27   | 67.40  | 16.48 |      | 150.0 |         |
|           |                                                                | Z | 5.18   | 67.14  | 16.40 |      | 150.0 |         |
| 10430-AAB | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)                               | X | 4.20   | 71.33  | 18.23 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.38   | 72.12  | 18.67 |      | 150.0 |         |
|           |                                                                | Z | 4.24   | 71.88  | 18.40 |      | 150.0 |         |
| 10431-AAB | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)                              | X | 4.04   | 67.01  | 16.00 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.14   | 67.47  | 16.25 |      | 150.0 |         |
|           |                                                                | Z | 4.00   | 67.12  | 16.01 |      | 150.0 |         |
| 10432-AAB | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)                              | X | 4.35   | 66.89  | 16.12 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.44   | 67.29  | 16.32 |      | 150.0 |         |
|           |                                                                | Z | 4.31   | 66.97  | 16.15 |      | 150.0 |         |
| 10433-AAB | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)                              | X | 4.61   | 66.86  | 16.21 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.68   | 67.24  | 16.38 |      | 150.0 |         |
|           |                                                                | Z | 4.57   | 66.94  | 16.24 |      | 150.0 |         |
| 10434-AAA | W-CDMA (BS Test Model 1, 64 DPCH)                              | X | 4.31   | 72.22  | 18.13 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.57   | 73.29  | 18.72 |      | 150.0 |         |
|           |                                                                | Z | 4.37   | 72.83  | 18.28 |      | 150.0 |         |
| 10435-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 46.38  | 110.94 | 27.14 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                | Y | 100.00 | 119.98 | 29.08 |      | 80.0  |         |
|           |                                                                | Z | 100.00 | 122.32 | 30.05 |      | 80.0  |         |
| 10447-AAB | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)                 | X | 3.31   | 66.87  | 15.09 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 3.44   | 67.57  | 15.54 |      | 150.0 |         |
|           |                                                                | Z | 3.26   | 66.97  | 15.03 |      | 150.0 |         |
| 10448-AAB | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)                | X | 3.89   | 66.79  | 15.86 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 3.98   | 67.27  | 16.12 |      | 150.0 |         |
|           |                                                                | Z | 3.85   | 66.90  | 15.88 |      | 150.0 |         |
| 10449-AAB | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)                | X | 4.17   | 66.71  | 16.01 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.26   | 67.14  | 16.23 |      | 150.0 |         |
|           |                                                                | Z | 4.14   | 66.80  | 16.04 |      | 150.0 |         |
| 10450-AAB | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)                | X | 4.38   | 66.63  | 16.06 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.46   | 67.03  | 16.25 |      | 150.0 |         |
|           |                                                                | Z | 4.35   | 66.71  | 16.09 |      | 150.0 |         |
| 10451-AAA | W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)                | X | 3.16   | 66.87  | 14.55 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 3.31   | 67.71  | 15.09 |      | 150.0 |         |
|           |                                                                | Z | 3.09   | 66.88  | 14.41 |      | 150.0 |         |
| 10456-AAB | IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle)           | X | 6.10   | 67.71  | 16.58 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 6.13   | 67.95  | 16.63 |      | 150.0 |         |
|           |                                                                | Z | 6.10   | 67.81  | 16.63 |      | 150.0 |         |
| 10457-AAA | UMTS-FDD (DC-HSDPA)                                            | X | 3.68   | 65.12  | 15.78 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 3.75   | 65.52  | 15.96 |      | 150.0 |         |
|           |                                                                | Z | 3.67   | 65.23  | 15.81 |      | 150.0 |         |
| 10458-AAA | CDMA2000 (1xEV-DO, Rev. B, 2 carriers)                         | X | 3.88   | 71.11  | 17.24 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.15   | 72.36  | 17.96 |      | 150.0 |         |
|           |                                                                | Z | 3.88   | 71.47  | 17.22 |      | 150.0 |         |
| 10459-AAA | CDMA2000 (1xEV-DO, Rev. B, 3 carriers)                         | X | 5.03   | 68.93  | 18.26 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 5.12   | 69.27  | 18.40 |      | 150.0 |         |
|           |                                                                | Z | 5.02   | 69.28  | 18.31 |      | 150.0 |         |

|           |                                                                   |   |        |        |       |      |       |         |
|-----------|-------------------------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10460-AAA | UMTS-FDD (WCDMA, AMR)                                             | X | 0.76   | 67.21  | 14.98 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                   | Y | 0.95   | 70.10  | 17.17 |      | 150.0 |         |
|           |                                                                   | Z | 0.78   | 67.84  | 15.35 |      | 150.0 |         |
| 10461-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 100.00 | 124.22 | 31.05 | 3.29 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 126.59 | 32.12 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 126.67 | 32.13 |      | 80.0  |         |
| 10462-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.13   | 62.20  | 9.29  | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 1.76   | 66.14  | 10.65 |      | 80.0  |         |
|           |                                                                   | Z | 1.32   | 63.88  | 10.13 |      | 80.0  |         |
| 10463-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 0.91   | 60.00  | 7.67  | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 0.95   | 60.52  | 7.63  |      | 80.0  |         |
|           |                                                                   | Z | 0.89   | 60.00  | 7.73  |      | 80.0  |         |
| 10464-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 47.59  | 111.65 | 27.34 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 123.29 | 30.45 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 123.26 | 30.40 |      | 80.0  |         |
| 10465-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 1.05   | 61.52  | 8.89  | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 1.46   | 64.47  | 9.90  |      | 80.0  |         |
|           |                                                                   | Z | 1.18   | 62.83  | 9.59  |      | 80.0  |         |
| 10466-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 0.91   | 60.00  | 7.62  | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 0.90   | 60.08  | 7.36  |      | 80.0  |         |
|           |                                                                   | Z | 0.89   | 60.00  | 7.68  |      | 80.0  |         |
| 10467-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 72.09  | 117.06 | 28.59 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 123.66 | 30.60 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 123.63 | 30.56 |      | 80.0  |         |
| 10468-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 1.07   | 61.70  | 9.00  | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 1.53   | 64.89  | 10.09 |      | 80.0  |         |
|           |                                                                   | Z | 1.22   | 63.12  | 9.74  |      | 80.0  |         |
| 10469-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 0.91   | 60.00  | 7.62  | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 0.90   | 60.09  | 7.36  |      | 80.0  |         |
|           |                                                                   | Z | 0.89   | 60.00  | 7.68  |      | 80.0  |         |
| 10470-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 74.02  | 117.39 | 28.66 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 123.68 | 30.61 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 123.65 | 30.56 |      | 80.0  |         |
| 10471-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 1.07   | 61.65  | 8.96  | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 1.51   | 64.78  | 10.03 |      | 80.0  |         |
|           |                                                                   | Z | 1.21   | 63.05  | 9.70  |      | 80.0  |         |
| 10472-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)  | X | 0.91   | 60.00  | 7.61  | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 0.89   | 60.04  | 7.32  |      | 80.0  |         |
|           |                                                                   | Z | 0.89   | 60.00  | 7.66  |      | 80.0  |         |
| 10473-AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 72.58  | 117.11 | 28.59 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 123.64 | 30.59 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 123.61 | 30.54 |      | 80.0  |         |
| 10474-AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 1.06   | 61.62  | 8.95  | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 1.50   | 64.73  | 10.01 |      | 80.0  |         |
|           |                                                                   | Z | 1.20   | 63.02  | 9.68  |      | 80.0  |         |
| 10475-AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)  | X | 0.91   | 60.00  | 7.61  | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 0.89   | 60.02  | 7.32  |      | 80.0  |         |
|           |                                                                   | Z | 0.89   | 60.00  | 7.66  |      | 80.0  |         |

|           |                                                                     |   |       |        |       |      |      |         |
|-----------|---------------------------------------------------------------------|---|-------|--------|-------|------|------|---------|
| 10477-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)    | X | 1.04  | 61.46  | 8.85  | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 1.44  | 64.36  | 9.83  |      | 80.0 |         |
|           |                                                                     | Z | 1.17  | 62.77  | 9.54  |      | 80.0 |         |
| 10478-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)    | X | 0.91  | 60.00  | 7.60  | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 0.89  | 60.00  | 7.29  |      | 80.0 |         |
|           |                                                                     | Z | 0.89  | 60.00  | 7.65  |      | 80.0 |         |
| 10479-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 8.21  | 87.49  | 22.94 | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 20.18 | 101.14 | 27.13 |      | 80.0 |         |
|           |                                                                     | Z | 18.46 | 99.74  | 26.54 |      | 80.0 |         |
| 10480-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 5.14  | 76.02  | 17.14 | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 17.56 | 91.22  | 21.83 |      | 80.0 |         |
|           |                                                                     | Z | 8.18  | 81.93  | 19.01 |      | 80.0 |         |
| 10481-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.78  | 71.70  | 15.15 | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 9.36  | 82.53  | 18.82 |      | 80.0 |         |
|           |                                                                     | Z | 4.98  | 75.18  | 16.32 |      | 80.0 |         |
| 10482-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 2.35  | 69.25  | 15.02 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 3.01  | 72.46  | 16.59 |      | 80.0 |         |
|           |                                                                     | Z | 2.33  | 69.25  | 14.80 |      | 80.0 |         |
| 10483-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 3.09  | 69.06  | 14.42 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 4.90  | 74.92  | 16.84 |      | 80.0 |         |
|           |                                                                     | Z | 3.31  | 69.99  | 14.61 |      | 80.0 |         |
| 10484-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 2.93  | 68.12  | 14.03 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 4.36  | 73.23  | 16.22 |      | 80.0 |         |
|           |                                                                     | Z | 3.05  | 68.75  | 14.10 |      | 80.0 |         |
| 10485-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 2.95  | 72.33  | 17.49 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 3.47  | 74.53  | 18.53 |      | 80.0 |         |
|           |                                                                     | Z | 3.08  | 73.09  | 17.68 |      | 80.0 |         |
| 10486-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 2.76  | 67.89  | 15.02 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 3.16  | 69.70  | 15.94 |      | 80.0 |         |
|           |                                                                     | Z | 2.75  | 68.00  | 14.88 |      | 80.0 |         |
| 10487-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 2.75  | 67.50  | 14.83 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 3.13  | 69.21  | 15.71 |      | 80.0 |         |
|           |                                                                     | Z | 2.74  | 67.55  | 14.66 |      | 80.0 |         |
| 10488-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 3.27  | 71.87  | 18.23 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 3.61  | 73.22  | 18.84 |      | 80.0 |         |
|           |                                                                     | Z | 3.35  | 72.44  | 18.47 |      | 80.0 |         |
| 10489-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 3.21  | 68.44  | 16.77 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 3.45  | 69.44  | 17.24 |      | 80.0 |         |
|           |                                                                     | Z | 3.25  | 68.82  | 16.89 |      | 80.0 |         |
| 10490-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)  | X | 3.29  | 68.29  | 16.72 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 3.53  | 69.24  | 17.16 |      | 80.0 |         |
|           |                                                                     | Z | 3.33  | 68.65  | 16.82 |      | 80.0 |         |
| 10491-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 3.51  | 70.39  | 17.81 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 3.78  | 71.45  | 18.28 |      | 80.0 |         |
|           |                                                                     | Z | 3.55  | 70.76  | 17.99 |      | 80.0 |         |
| 10492-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 3.56  | 67.76  | 16.86 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 3.76  | 68.54  | 17.20 |      | 80.0 |         |
|           |                                                                     | Z | 3.58  | 68.03  | 16.97 |      | 80.0 |         |

|           |                                                                      |   |      |       |       |      |      |         |
|-----------|----------------------------------------------------------------------|---|------|-------|-------|------|------|---------|
| 10493-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 3.62 | 67.64 | 16.82 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 3.82 | 68.40 | 17.14 |      | 80.0 |         |
|           |                                                                      | Z | 3.64 | 67.90 | 16.91 |      | 80.0 |         |
| 10494-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 3.79 | 71.83 | 18.26 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 4.13 | 73.06 | 18.79 |      | 80.0 |         |
|           |                                                                      | Z | 3.85 | 72.23 | 18.46 |      | 80.0 |         |
| 10495-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 3.59 | 68.11 | 17.06 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 3.79 | 68.91 | 17.40 |      | 80.0 |         |
|           |                                                                      | Z | 3.61 | 68.36 | 17.17 |      | 80.0 |         |
| 10496-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 3.67 | 67.87 | 17.00 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 3.86 | 68.62 | 17.31 |      | 80.0 |         |
|           |                                                                      | Z | 3.69 | 68.11 | 17.10 |      | 80.0 |         |
| 10497-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 1.45 | 63.41 | 11.17 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 1.92 | 66.56 | 12.95 |      | 80.0 |         |
|           |                                                                      | Z | 1.35 | 62.71 | 10.54 |      | 80.0 |         |
| 10498-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.28 | 60.00 | 8.33  | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 1.38 | 60.59 | 8.91  |      | 80.0 |         |
|           |                                                                      | Z | 1.25 | 60.00 | 8.01  |      | 80.0 |         |
| 10499-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.30 | 60.00 | 8.19  | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 1.33 | 60.08 | 8.49  |      | 80.0 |         |
|           |                                                                      | Z | 1.27 | 60.00 | 7.87  |      | 80.0 |         |
| 10500-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 3.04 | 71.93 | 17.72 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 3.46 | 73.67 | 18.54 |      | 80.0 |         |
|           |                                                                      | Z | 3.15 | 72.64 | 17.94 |      | 80.0 |         |
| 10501-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 2.98 | 68.33 | 15.79 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 3.31 | 69.74 | 16.50 |      | 80.0 |         |
|           |                                                                      | Z | 3.01 | 68.63 | 15.79 |      | 80.0 |         |
| 10502-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 3.03 | 68.16 | 15.65 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 3.36 | 69.55 | 16.35 |      | 80.0 |         |
|           |                                                                      | Z | 3.05 | 68.42 | 15.63 |      | 80.0 |         |
| 10503-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 3.23 | 71.65 | 18.12 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 3.56 | 73.00 | 18.74 |      | 80.0 |         |
|           |                                                                      | Z | 3.30 | 72.21 | 18.35 |      | 80.0 |         |
| 10504-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 3.19 | 68.33 | 16.71 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 3.43 | 69.33 | 17.17 |      | 80.0 |         |
|           |                                                                      | Z | 3.23 | 68.71 | 16.82 |      | 80.0 |         |
| 10505-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 3.27 | 68.19 | 16.66 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 3.51 | 69.14 | 17.10 |      | 80.0 |         |
|           |                                                                      | Z | 3.31 | 68.54 | 16.75 |      | 80.0 |         |
| 10506-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 3.76 | 71.67 | 18.18 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 4.10 | 72.90 | 18.71 |      | 80.0 |         |
|           |                                                                      | Z | 3.81 | 72.07 | 18.38 |      | 80.0 |         |
| 10507-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 3.57 | 68.04 | 17.02 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 3.78 | 68.84 | 17.36 |      | 80.0 |         |
|           |                                                                      | Z | 3.59 | 68.29 | 17.13 |      | 80.0 |         |

|           |                                                                     |   |      |       |       |      |       |         |
|-----------|---------------------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10508-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.65 | 67.79 | 16.95 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 3.85 | 68.55 | 17.26 |      | 80.0  |         |
|           |                                                                     | Z | 3.67 | 68.04 | 17.05 |      | 80.0  |         |
| 10509-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 4.11 | 70.47 | 17.71 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 4.41 | 71.52 | 18.16 |      | 80.0  |         |
|           |                                                                     | Z | 4.14 | 70.76 | 17.87 |      | 80.0  |         |
| 10510-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.05 | 67.79 | 17.05 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 4.24 | 68.50 | 17.33 |      | 80.0  |         |
|           |                                                                     | Z | 4.06 | 67.96 | 17.14 |      | 80.0  |         |
| 10511-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.11 | 67.57 | 17.00 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 4.30 | 68.25 | 17.26 |      | 80.0  |         |
|           |                                                                     | Z | 4.12 | 67.74 | 17.08 |      | 80.0  |         |
| 10512-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 4.27 | 71.92 | 18.15 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 4.64 | 73.17 | 18.68 |      | 80.0  |         |
|           |                                                                     | Z | 4.32 | 72.22 | 18.32 |      | 80.0  |         |
| 10513-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.94 | 68.01 | 17.14 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 4.13 | 68.75 | 17.43 |      | 80.0  |         |
|           |                                                                     | Z | 3.95 | 68.18 | 17.23 |      | 80.0  |         |
| 10514-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.97 | 67.63 | 17.03 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 4.15 | 68.33 | 17.30 |      | 80.0  |         |
|           |                                                                     | Z | 3.98 | 67.79 | 17.12 |      | 80.0  |         |
| 10515-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)           | X | 0.87 | 62.63 | 14.14 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 0.97 | 63.74 | 15.08 |      | 150.0 |         |
|           |                                                                     | Z | 0.87 | 62.85 | 14.30 |      | 150.0 |         |
| 10516-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)         | X | 0.49 | 69.66 | 15.70 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 0.68 | 73.95 | 19.23 |      | 150.0 |         |
|           |                                                                     | Z | 0.52 | 70.86 | 16.45 |      | 150.0 |         |
| 10517-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)          | X | 0.71 | 64.33 | 14.51 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 0.83 | 66.01 | 15.95 |      | 150.0 |         |
|           |                                                                     | Z | 0.72 | 64.67 | 14.76 |      | 150.0 |         |
| 10518-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)           | X | 4.38 | 66.55 | 16.05 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.46 | 66.94 | 16.23 |      | 150.0 |         |
|           |                                                                     | Z | 4.35 | 66.64 | 16.08 |      | 150.0 |         |
| 10519-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)          | X | 4.55 | 66.77 | 16.16 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.62 | 67.14 | 16.33 |      | 150.0 |         |
|           |                                                                     | Z | 4.51 | 66.84 | 16.19 |      | 150.0 |         |
| 10520-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)          | X | 4.40 | 66.71 | 16.07 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.48 | 67.10 | 16.26 |      | 150.0 |         |
|           |                                                                     | Z | 4.37 | 66.78 | 16.10 |      | 150.0 |         |
| 10521-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)          | X | 4.34 | 66.70 | 16.06 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.42 | 67.10 | 16.25 |      | 150.0 |         |
|           |                                                                     | Z | 4.30 | 66.76 | 16.08 |      | 150.0 |         |
| 10522-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)          | X | 4.40 | 66.82 | 16.16 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.48 | 67.21 | 16.34 |      | 150.0 |         |
|           |                                                                     | Z | 4.36 | 66.90 | 16.19 |      | 150.0 |         |

|           |                                                            |   |      |       |       |      |       |         |
|-----------|------------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10523-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle) | X | 4.29 | 66.70 | 16.01 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.37 | 67.12 | 16.22 |      | 150.0 |         |
|           |                                                            | Z | 4.26 | 66.81 | 16.06 |      | 150.0 |         |
| 10524-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle) | X | 4.34 | 66.74 | 16.12 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.42 | 67.13 | 16.31 |      | 150.0 |         |
|           |                                                            | Z | 4.30 | 66.82 | 16.16 |      | 150.0 |         |
| 10525-AAB | IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle)          | X | 4.34 | 65.80 | 15.73 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.43 | 66.22 | 15.92 |      | 150.0 |         |
|           |                                                            | Z | 4.32 | 65.90 | 15.77 |      | 150.0 |         |
| 10526-AAB | IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle)          | X | 4.50 | 66.14 | 15.86 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.58 | 66.55 | 16.05 |      | 150.0 |         |
|           |                                                            | Z | 4.46 | 66.22 | 15.90 |      | 150.0 |         |
| 10527-AAB | IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle)          | X | 4.42 | 66.09 | 15.80 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.50 | 66.52 | 16.00 |      | 150.0 |         |
|           |                                                            | Z | 4.38 | 66.18 | 15.84 |      | 150.0 |         |
| 10528-AAB | IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle)          | X | 4.44 | 66.11 | 15.83 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.52 | 66.53 | 16.03 |      | 150.0 |         |
|           |                                                            | Z | 4.40 | 66.19 | 15.87 |      | 150.0 |         |
| 10529-AAB | IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle)          | X | 4.44 | 66.11 | 15.83 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.52 | 66.53 | 16.03 |      | 150.0 |         |
|           |                                                            | Z | 4.40 | 66.19 | 15.87 |      | 150.0 |         |
| 10531-AAB | IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle)          | X | 4.42 | 66.18 | 15.83 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.50 | 66.61 | 16.03 |      | 150.0 |         |
|           |                                                            | Z | 4.37 | 66.25 | 15.86 |      | 150.0 |         |
| 10532-AAB | IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle)          | X | 4.29 | 66.04 | 15.76 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.37 | 66.48 | 15.97 |      | 150.0 |         |
|           |                                                            | Z | 4.25 | 66.11 | 15.79 |      | 150.0 |         |
| 10533-AAB | IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle)          | X | 4.44 | 66.17 | 15.83 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.53 | 66.60 | 16.03 |      | 150.0 |         |
|           |                                                            | Z | 4.41 | 66.26 | 15.87 |      | 150.0 |         |
| 10534-AAB | IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle)          | X | 4.98 | 66.20 | 15.91 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.05 | 66.57 | 16.06 |      | 150.0 |         |
|           |                                                            | Z | 4.95 | 66.26 | 15.95 |      | 150.0 |         |
| 10535-AAB | IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle)          | X | 5.05 | 66.39 | 16.00 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.11 | 66.72 | 16.13 |      | 150.0 |         |
|           |                                                            | Z | 5.01 | 66.43 | 16.03 |      | 150.0 |         |
| 10536-AAB | IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle)          | X | 4.92 | 66.34 | 15.95 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.99 | 66.70 | 16.10 |      | 150.0 |         |
|           |                                                            | Z | 4.89 | 66.40 | 15.99 |      | 150.0 |         |
| 10537-AAB | IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle)          | X | 4.98 | 66.30 | 15.94 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.04 | 66.66 | 16.08 |      | 150.0 |         |
|           |                                                            | Z | 4.95 | 66.35 | 15.97 |      | 150.0 |         |
| 10538-AAB | IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle)          | X | 5.06 | 66.31 | 15.98 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.12 | 66.65 | 16.12 |      | 150.0 |         |
|           |                                                            | Z | 5.02 | 66.35 | 16.01 |      | 150.0 |         |
| 10540-AAB | IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle)          | X | 4.99 | 66.30 | 16.00 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.05 | 66.64 | 16.13 |      | 150.0 |         |
|           |                                                            | Z | 4.95 | 66.33 | 16.02 |      | 150.0 |         |



|           |                                                    |   |      |       |       |      |       |         |
|-----------|----------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10541-AAB | IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle)  | X | 4.97 | 66.19 | 15.93 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.03 | 66.55 | 16.07 |      | 150.0 |         |
|           |                                                    | Z | 4.93 | 66.22 | 15.95 |      | 150.0 |         |
| 10542-AAB | IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle)  | X | 5.12 | 66.28 | 15.99 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.19 | 66.62 | 16.12 |      | 150.0 |         |
|           |                                                    | Z | 5.09 | 66.32 | 16.02 |      | 150.0 |         |
| 10543-AAB | IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle)  | X | 5.19 | 66.29 | 16.02 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.25 | 66.63 | 16.15 |      | 150.0 |         |
|           |                                                    | Z | 5.15 | 66.34 | 16.05 |      | 150.0 |         |
| 10544-AAB | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)  | X | 5.31 | 66.31 | 15.91 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.37 | 66.66 | 16.05 |      | 150.0 |         |
|           |                                                    | Z | 5.28 | 66.35 | 15.94 |      | 150.0 |         |
| 10545-AAB | IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle)  | X | 5.50 | 66.75 | 16.09 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.54 | 67.02 | 16.18 |      | 150.0 |         |
|           |                                                    | Z | 5.47 | 66.79 | 16.11 |      | 150.0 |         |
| 10546-AAB | IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle)  | X | 5.36 | 66.48 | 15.97 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.42 | 66.83 | 16.10 |      | 150.0 |         |
|           |                                                    | Z | 5.33 | 66.50 | 15.98 |      | 150.0 |         |
| 10547-AAB | IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle)  | X | 5.43 | 66.54 | 15.99 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.49 | 66.87 | 16.11 |      | 150.0 |         |
|           |                                                    | Z | 5.40 | 66.57 | 16.01 |      | 150.0 |         |
| 10548-AAB | IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle)  | X | 5.66 | 67.42 | 16.40 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.65 | 67.55 | 16.42 |      | 150.0 |         |
|           |                                                    | Z | 5.60 | 67.37 | 16.38 |      | 150.0 |         |
| 10550-AAB | IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle)  | X | 5.40 | 66.56 | 16.02 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.45 | 66.87 | 16.13 |      | 150.0 |         |
|           |                                                    | Z | 5.37 | 66.62 | 16.05 |      | 150.0 |         |
| 10551-AAB | IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle)  | X | 5.39 | 66.55 | 15.97 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.45 | 66.88 | 16.09 |      | 150.0 |         |
|           |                                                    | Z | 5.35 | 66.53 | 15.97 |      | 150.0 |         |
| 10552-AAB | IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle)  | X | 5.32 | 66.38 | 15.89 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.38 | 66.76 | 16.04 |      | 150.0 |         |
|           |                                                    | Z | 5.29 | 66.43 | 15.92 |      | 150.0 |         |
| 10553-AAB | IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle)  | X | 5.39 | 66.39 | 15.93 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.45 | 66.75 | 16.07 |      | 150.0 |         |
|           |                                                    | Z | 5.36 | 66.42 | 15.95 |      | 150.0 |         |
| 10554-AAC | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) | X | 5.72 | 66.67 | 16.01 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.77 | 67.00 | 16.12 |      | 150.0 |         |
|           |                                                    | Z | 5.70 | 66.69 | 16.02 |      | 150.0 |         |
| 10555-AAC | IEEE 802.11ac WiFi (160MHz, MCS1, 99pc duty cycle) | X | 5.84 | 66.96 | 16.13 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.88 | 67.25 | 16.23 |      | 150.0 |         |
|           |                                                    | Z | 5.81 | 66.97 | 16.14 |      | 150.0 |         |
| 10556-AAC | IEEE 802.11ac WiFi (160MHz, MCS2, 99pc duty cycle) | X | 5.87 | 67.02 | 16.15 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.91 | 67.31 | 16.25 |      | 150.0 |         |
|           |                                                    | Z | 5.84 | 67.04 | 16.17 |      | 150.0 |         |
| 10557-AAC | IEEE 802.11ac WiFi (160MHz, MCS3, 99pc duty cycle) | X | 5.83 | 66.90 | 16.11 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.87 | 67.22 | 16.22 |      | 150.0 |         |
|           |                                                    | Z | 5.80 | 66.91 | 16.13 |      | 150.0 |         |

|           |                                                                 |   |      |       |       |      |       |         |
|-----------|-----------------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10558-AAC | IEEE 802.11ac WiFi (160MHz, MCS4, 99pc duty cycle)              | X | 5.87 | 67.06 | 16.20 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 5.91 | 67.36 | 16.31 |      | 150.0 |         |
|           |                                                                 | Z | 5.83 | 67.06 | 16.21 |      | 150.0 |         |
| 10560-AAC | IEEE 802.11ac WiFi (160MHz, MCS6, 99pc duty cycle)              | X | 5.86 | 66.91 | 16.17 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 5.92 | 67.23 | 16.28 |      | 150.0 |         |
|           |                                                                 | Z | 5.83 | 66.92 | 16.18 |      | 150.0 |         |
| 10561-AAC | IEEE 802.11ac WiFi (160MHz, MCS7, 99pc duty cycle)              | X | 5.80 | 66.89 | 16.20 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 5.84 | 67.19 | 16.30 |      | 150.0 |         |
|           |                                                                 | Z | 5.77 | 66.91 | 16.21 |      | 150.0 |         |
| 10562-AAC | IEEE 802.11ac WiFi (160MHz, MCS8, 99pc duty cycle)              | X | 5.89 | 67.20 | 16.35 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 5.93 | 67.48 | 16.44 |      | 150.0 |         |
|           |                                                                 | Z | 5.84 | 67.16 | 16.34 |      | 150.0 |         |
| 10563-AAC | IEEE 802.11ac WiFi (160MHz, MCS9, 99pc duty cycle)              | X | 6.00 | 67.15 | 16.29 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 6.02 | 67.38 | 16.35 |      | 150.0 |         |
|           |                                                                 | Z | 5.93 | 67.06 | 16.25 |      | 150.0 |         |
| 10564-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle)  | X | 4.70 | 66.60 | 16.19 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.77 | 66.96 | 16.34 |      | 150.0 |         |
|           |                                                                 | Z | 4.67 | 66.68 | 16.22 |      | 150.0 |         |
| 10565-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle) | X | 4.92 | 67.06 | 16.53 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.99 | 67.39 | 16.67 |      | 150.0 |         |
|           |                                                                 | Z | 4.88 | 67.12 | 16.55 |      | 150.0 |         |
| 10566-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle) | X | 4.75 | 66.88 | 16.33 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.82 | 67.22 | 16.47 |      | 150.0 |         |
|           |                                                                 | Z | 4.71 | 66.94 | 16.35 |      | 150.0 |         |
| 10567-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle) | X | 4.79 | 67.31 | 16.72 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.86 | 67.67 | 16.87 |      | 150.0 |         |
|           |                                                                 | Z | 4.75 | 67.38 | 16.75 |      | 150.0 |         |
| 10568-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle) | X | 4.66 | 66.64 | 16.08 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.73 | 66.98 | 16.23 |      | 150.0 |         |
|           |                                                                 | Z | 4.62 | 66.69 | 16.09 |      | 150.0 |         |
| 10569-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle) | X | 4.76 | 67.45 | 16.81 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.83 | 67.82 | 16.96 |      | 150.0 |         |
|           |                                                                 | Z | 4.73 | 67.57 | 16.86 |      | 150.0 |         |
| 10570-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle) | X | 4.78 | 67.26 | 16.71 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.85 | 67.62 | 16.86 |      | 150.0 |         |
|           |                                                                 | Z | 4.74 | 67.35 | 16.75 |      | 150.0 |         |
| 10571-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)       | X | 1.05 | 63.78 | 14.98 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 1.16 | 64.84 | 15.77 |      | 130.0 |         |
|           |                                                                 | Z | 1.06 | 64.03 | 15.14 |      | 130.0 |         |
| 10572-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)       | X | 1.06 | 64.35 | 15.34 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 1.17 | 65.47 | 16.16 |      | 130.0 |         |
|           |                                                                 | Z | 1.07 | 64.63 | 15.52 |      | 130.0 |         |
| 10573-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)     | X | 1.81 | 84.33 | 21.65 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 2.93 | 92.85 | 25.80 |      | 130.0 |         |
|           |                                                                 | Z | 2.19 | 87.52 | 22.91 |      | 130.0 |         |
| 10574-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)      | X | 1.15 | 70.21 | 18.29 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 1.33 | 72.12 | 19.55 |      | 130.0 |         |
|           |                                                                 | Z | 1.19 | 70.90 | 18.68 |      | 130.0 |         |

|           |                                                                 |   |      |       |       |      |       |         |
|-----------|-----------------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10575-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle)  | X | 4.49 | 66.39 | 16.24 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.55 | 66.72 | 16.36 |      | 130.0 |         |
|           |                                                                 | Z | 4.46 | 66.48 | 16.26 |      | 130.0 |         |
| 10576-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle)  | X | 4.51 | 66.57 | 16.31 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.58 | 66.91 | 16.44 |      | 130.0 |         |
|           |                                                                 | Z | 4.48 | 66.67 | 16.34 |      | 130.0 |         |
| 10577-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle) | X | 4.70 | 66.85 | 16.48 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.77 | 67.17 | 16.60 |      | 130.0 |         |
|           |                                                                 | Z | 4.67 | 66.93 | 16.51 |      | 130.0 |         |
| 10578-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle) | X | 4.60 | 67.01 | 16.59 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.67 | 67.35 | 16.72 |      | 130.0 |         |
|           |                                                                 | Z | 4.57 | 67.10 | 16.62 |      | 130.0 |         |
| 10579-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle) | X | 4.36 | 66.21 | 15.83 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.42 | 66.54 | 15.97 |      | 130.0 |         |
|           |                                                                 | Z | 4.32 | 66.26 | 15.84 |      | 130.0 |         |
| 10580-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle) | X | 4.40 | 66.27 | 15.86 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.46 | 66.59 | 16.00 |      | 130.0 |         |
|           |                                                                 | Z | 4.36 | 66.33 | 15.88 |      | 130.0 |         |
| 10581-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle) | X | 4.50 | 67.05 | 16.53 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.57 | 67.39 | 16.67 |      | 130.0 |         |
|           |                                                                 | Z | 4.47 | 67.15 | 16.57 |      | 130.0 |         |
| 10582-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle) | X | 4.29 | 65.96 | 15.60 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.35 | 66.28 | 15.74 |      | 130.0 |         |
|           |                                                                 | Z | 4.25 | 66.00 | 15.61 |      | 130.0 |         |
| 10583-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)       | X | 4.49 | 66.39 | 16.24 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.55 | 66.72 | 16.36 |      | 130.0 |         |
|           |                                                                 | Z | 4.46 | 66.48 | 16.26 |      | 130.0 |         |
| 10584-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)       | X | 4.51 | 66.57 | 16.31 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.58 | 66.91 | 16.44 |      | 130.0 |         |
|           |                                                                 | Z | 4.48 | 66.67 | 16.34 |      | 130.0 |         |
| 10585-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)      | X | 4.70 | 66.85 | 16.48 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.77 | 67.17 | 16.60 |      | 130.0 |         |
|           |                                                                 | Z | 4.67 | 66.93 | 16.51 |      | 130.0 |         |
| 10586-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)      | X | 4.60 | 67.01 | 16.59 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.67 | 67.35 | 16.72 |      | 130.0 |         |
|           |                                                                 | Z | 4.57 | 67.10 | 16.62 |      | 130.0 |         |
| 10587-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)      | X | 4.36 | 66.21 | 15.83 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.42 | 66.54 | 15.97 |      | 130.0 |         |
|           |                                                                 | Z | 4.32 | 66.26 | 15.84 |      | 130.0 |         |
| 10588-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)      | X | 4.40 | 66.27 | 15.86 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.46 | 66.59 | 16.00 |      | 130.0 |         |
|           |                                                                 | Z | 4.36 | 66.33 | 15.88 |      | 130.0 |         |
| 10589-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)      | X | 4.50 | 67.05 | 16.53 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.57 | 67.39 | 16.67 |      | 130.0 |         |
|           |                                                                 | Z | 4.47 | 67.15 | 16.57 |      | 130.0 |         |
| 10590-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)      | X | 4.29 | 65.96 | 15.60 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.35 | 66.28 | 15.74 |      | 130.0 |         |
|           |                                                                 | Z | 4.25 | 66.00 | 15.61 |      | 130.0 |         |

|           |                                                       |   |      |       |       |      |       |         |
|-----------|-------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10591-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle) | X | 4.64 | 66.47 | 16.35 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.70 | 66.79 | 16.47 |      | 130.0 |         |
|           |                                                       | Z | 4.61 | 66.56 | 16.38 |      | 130.0 |         |
| 10592-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle) | X | 4.78 | 66.80 | 16.49 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.84 | 67.11 | 16.60 |      | 130.0 |         |
|           |                                                       | Z | 4.75 | 66.87 | 16.51 |      | 130.0 |         |
| 10593-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle) | X | 4.70 | 66.68 | 16.35 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.76 | 67.00 | 16.47 |      | 130.0 |         |
|           |                                                       | Z | 4.66 | 66.75 | 16.37 |      | 130.0 |         |
| 10594-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle) | X | 4.76 | 66.86 | 16.52 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.82 | 67.18 | 16.63 |      | 130.0 |         |
|           |                                                       | Z | 4.72 | 66.94 | 16.54 |      | 130.0 |         |
| 10595-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle) | X | 4.72 | 66.81 | 16.41 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.78 | 67.13 | 16.53 |      | 130.0 |         |
|           |                                                       | Z | 4.68 | 66.89 | 16.44 |      | 130.0 |         |
| 10596-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle) | X | 4.66 | 66.80 | 16.40 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.72 | 67.12 | 16.53 |      | 130.0 |         |
|           |                                                       | Z | 4.62 | 66.87 | 16.43 |      | 130.0 |         |
| 10597-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle) | X | 4.60 | 66.68 | 16.27 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.67 | 67.01 | 16.40 |      | 130.0 |         |
|           |                                                       | Z | 4.57 | 66.74 | 16.29 |      | 130.0 |         |
| 10598-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle) | X | 4.59 | 66.93 | 16.55 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.66 | 67.26 | 16.68 |      | 130.0 |         |
|           |                                                       | Z | 4.56 | 67.00 | 16.58 |      | 130.0 |         |
| 10599-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle) | X | 5.32 | 67.00 | 16.59 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.34 | 67.19 | 16.62 |      | 130.0 |         |
|           |                                                       | Z | 5.28 | 67.04 | 16.61 |      | 130.0 |         |
| 10600-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle) | X | 5.45 | 67.42 | 16.77 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.44 | 67.51 | 16.75 |      | 130.0 |         |
|           |                                                       | Z | 5.41 | 67.45 | 16.79 |      | 130.0 |         |
| 10601-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle) | X | 5.34 | 67.16 | 16.66 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.36 | 67.35 | 16.69 |      | 130.0 |         |
|           |                                                       | Z | 5.30 | 67.21 | 16.68 |      | 130.0 |         |
| 10602-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle) | X | 5.45 | 67.27 | 16.63 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.48 | 67.47 | 16.67 |      | 130.0 |         |
|           |                                                       | Z | 5.43 | 67.37 | 16.68 |      | 130.0 |         |
| 10603-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle) | X | 5.52 | 67.55 | 16.90 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.54 | 67.72 | 16.93 |      | 130.0 |         |
|           |                                                       | Z | 5.50 | 67.66 | 16.96 |      | 130.0 |         |
| 10604-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle) | X | 5.38 | 67.16 | 16.70 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.41 | 67.36 | 16.73 |      | 130.0 |         |
|           |                                                       | Z | 5.38 | 67.32 | 16.78 |      | 130.0 |         |
| 10605-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle) | X | 5.44 | 67.34 | 16.78 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.45 | 67.47 | 16.78 |      | 130.0 |         |
|           |                                                       | Z | 5.41 | 67.37 | 16.80 |      | 130.0 |         |
| 10606-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle) | X | 5.17 | 66.57 | 16.25 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.21 | 66.82 | 16.32 |      | 130.0 |         |
|           |                                                       | Z | 5.14 | 66.65 | 16.29 |      | 130.0 |         |

|           |                                                   |   |      |       |       |      |       |         |
|-----------|---------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10607-AAB | IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle) | X | 4.48 | 65.79 | 15.98 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.55 | 66.14 | 16.12 |      | 130.0 |         |
|           |                                                   | Z | 4.46 | 65.89 | 16.02 |      | 130.0 |         |
| 10608-AAB | IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle) | X | 4.65 | 66.17 | 16.14 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.72 | 66.52 | 16.28 |      | 130.0 |         |
|           |                                                   | Z | 4.61 | 66.26 | 16.18 |      | 130.0 |         |
| 10609-AAB | IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle) | X | 4.54 | 66.00 | 15.96 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.61 | 66.36 | 16.11 |      | 130.0 |         |
|           |                                                   | Z | 4.51 | 66.08 | 15.99 |      | 130.0 |         |
| 10610-AAB | IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle) | X | 4.59 | 66.17 | 16.14 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.66 | 66.53 | 16.28 |      | 130.0 |         |
|           |                                                   | Z | 4.56 | 66.26 | 16.17 |      | 130.0 |         |
| 10611-AAB | IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle) | X | 4.51 | 65.97 | 15.97 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.57 | 66.32 | 16.12 |      | 130.0 |         |
|           |                                                   | Z | 4.47 | 66.05 | 16.01 |      | 130.0 |         |
| 10612-AAB | IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle) | X | 4.51 | 66.11 | 16.01 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.58 | 66.46 | 16.16 |      | 130.0 |         |
|           |                                                   | Z | 4.47 | 66.19 | 16.05 |      | 130.0 |         |
| 10613-AAB | IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle) | X | 4.51 | 65.96 | 15.88 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.57 | 66.31 | 16.02 |      | 130.0 |         |
|           |                                                   | Z | 4.46 | 66.02 | 15.90 |      | 130.0 |         |
| 10614-AAB | IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle) | X | 4.46 | 66.18 | 16.13 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.53 | 66.55 | 16.29 |      | 130.0 |         |
|           |                                                   | Z | 4.43 | 66.26 | 16.17 |      | 130.0 |         |
| 10615-AAB | IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle) | X | 4.50 | 65.78 | 15.73 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.57 | 66.13 | 15.88 |      | 130.0 |         |
|           |                                                   | Z | 4.46 | 65.86 | 15.76 |      | 130.0 |         |
| 10616-AAB | IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle) | X | 5.13 | 66.23 | 16.19 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.18 | 66.52 | 16.28 |      | 130.0 |         |
|           |                                                   | Z | 5.10 | 66.28 | 16.22 |      | 130.0 |         |
| 10617-AAB | IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle) | X | 5.21 | 66.44 | 16.26 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.24 | 66.68 | 16.33 |      | 130.0 |         |
|           |                                                   | Z | 5.17 | 66.48 | 16.29 |      | 130.0 |         |
| 10618-AAB | IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle) | X | 5.09 | 66.44 | 16.28 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.14 | 66.73 | 16.37 |      | 130.0 |         |
|           |                                                   | Z | 5.07 | 66.51 | 16.32 |      | 130.0 |         |
| 10619-AAB | IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle) | X | 5.10 | 66.22 | 16.10 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.14 | 66.49 | 16.19 |      | 130.0 |         |
|           |                                                   | Z | 5.07 | 66.27 | 16.13 |      | 130.0 |         |
| 10620-AAB | IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle) | X | 5.19 | 66.25 | 16.17 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.23 | 66.52 | 16.25 |      | 130.0 |         |
|           |                                                   | Z | 5.15 | 66.30 | 16.20 |      | 130.0 |         |
| 10621-AAB | IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle) | X | 5.20 | 66.42 | 16.38 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.25 | 66.70 | 16.46 |      | 130.0 |         |
|           |                                                   | Z | 5.17 | 66.46 | 16.41 |      | 130.0 |         |
| 10622-AAB | IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle) | X | 5.21 | 66.59 | 16.46 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.25 | 66.84 | 16.53 |      | 130.0 |         |
|           |                                                   | Z | 5.16 | 66.58 | 16.46 |      | 130.0 |         |

|           |                                                    |   |      |       |       |      |       |         |
|-----------|----------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10623-AAB | IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle)  | X | 5.08 | 66.07 | 16.06 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.13 | 66.35 | 16.15 |      | 130.0 |         |
|           |                                                    | Z | 5.04 | 66.08 | 16.07 |      | 130.0 |         |
| 10624-AAB | IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle)  | X | 5.27 | 66.29 | 16.24 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.32 | 66.55 | 16.31 |      | 130.0 |         |
|           |                                                    | Z | 5.24 | 66.33 | 16.26 |      | 130.0 |         |
| 10625-AAB | IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle)  | X | 5.56 | 67.05 | 16.67 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.57 | 67.20 | 16.69 |      | 130.0 |         |
|           |                                                    | Z | 5.45 | 66.85 | 16.58 |      | 130.0 |         |
| 10626-AAB | IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle)  | X | 5.45 | 66.29 | 16.15 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.49 | 66.58 | 16.24 |      | 130.0 |         |
|           |                                                    | Z | 5.42 | 66.33 | 16.18 |      | 130.0 |         |
| 10627-AAB | IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle)  | X | 5.69 | 66.90 | 16.42 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.70 | 67.08 | 16.45 |      | 130.0 |         |
|           |                                                    | Z | 5.66 | 66.94 | 16.45 |      | 130.0 |         |
| 10628-AAB | IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle)  | X | 5.46 | 66.33 | 16.07 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.50 | 66.60 | 16.14 |      | 130.0 |         |
|           |                                                    | Z | 5.42 | 66.33 | 16.07 |      | 130.0 |         |
| 10629-AAB | IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle)  | X | 5.54 | 66.41 | 16.10 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.57 | 66.66 | 16.17 |      | 130.0 |         |
|           |                                                    | Z | 5.51 | 66.44 | 16.12 |      | 130.0 |         |
| 10630-AAB | IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle)  | X | 5.93 | 67.80 | 16.79 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.86 | 67.72 | 16.70 |      | 130.0 |         |
|           |                                                    | Z | 5.85 | 67.67 | 16.74 |      | 130.0 |         |
| 10631-AAB | IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle)  | X | 5.84 | 67.65 | 16.92 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.86 | 67.82 | 16.94 |      | 130.0 |         |
|           |                                                    | Z | 5.79 | 67.61 | 16.91 |      | 130.0 |         |
| 10632-AAB | IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle)  | X | 5.66 | 66.99 | 16.61 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.68 | 67.19 | 16.65 |      | 130.0 |         |
|           |                                                    | Z | 5.64 | 67.07 | 16.66 |      | 130.0 |         |
| 10633-AAB | IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle)  | X | 5.53 | 66.52 | 16.20 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.57 | 66.82 | 16.28 |      | 130.0 |         |
|           |                                                    | Z | 5.50 | 66.56 | 16.22 |      | 130.0 |         |
| 10634-AAB | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle)  | X | 5.51 | 66.55 | 16.27 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.56 | 66.86 | 16.37 |      | 130.0 |         |
|           |                                                    | Z | 5.48 | 66.58 | 16.29 |      | 130.0 |         |
| 10635-AAB | IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle)  | X | 5.38 | 65.83 | 15.63 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.42 | 66.12 | 15.72 |      | 130.0 |         |
|           |                                                    | Z | 5.34 | 65.82 | 15.63 |      | 130.0 |         |
| 10636-AAC | IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle) | X | 5.87 | 66.66 | 16.24 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.90 | 66.93 | 16.31 |      | 130.0 |         |
|           |                                                    | Z | 5.85 | 66.69 | 16.27 |      | 130.0 |         |
| 10637-AAC | IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle) | X | 6.02 | 67.05 | 16.42 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 6.04 | 67.25 | 16.46 |      | 130.0 |         |
|           |                                                    | Z | 5.99 | 67.06 | 16.43 |      | 130.0 |         |
| 10638-AAC | IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle) | X | 6.02 | 67.01 | 16.38 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 6.04 | 67.26 | 16.44 |      | 130.0 |         |
|           |                                                    | Z | 5.99 | 67.04 | 16.40 |      | 130.0 |         |