

**MEASUREMENT REPORT**  
**FCC PART 15.247 WLAN 802.11b/g/n****Applicant Name:**

Samsung Electronics Co., Ltd.  
129, Samsung-ro,  
Yeongtong-gu, Suwon-si  
Gyeonggi-do, 16677, Korea

**Date of Testing:**

6/7 - 7/22/2019

**Test Site/Location:**

PCTEST Lab. Columbia, MD, USA

**Test Report Serial No.:**

1M1907090121-04.A3L

**FCC ID:**

**A3LSMT867V**

**APPLICANT:**

**Samsung Electronics Co., Ltd.**

**Application Type:**

Certification

**Model:**

SM-T867V

**EUT Type:**

Portable Tablet

**Frequency Range:**

2412 – 2472MHz

**FCC Classification:**

Digital Transmission System (DTS)

**FCC Rule Part(s):**

Part 15 Subpart C (15.247)

**Test Procedure(s):**

ANSI C63.10-2013, KDB 558074 D01 v05r02,  
KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 558074 D01 v05r02. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


  
Randy Ortanez  
President

|                                                |                                                                                                                                  |                                                                                       |                                        |
|------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> A3LSMT867V                      |  <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |  | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1M1907090121-04.A3L | <b>Test Dates:</b><br>6/7 - 7/22/2019                                                                                            | <b>EUT Type:</b><br>Portable Tablet                                                   | Page 1 of 108                          |


# TABLE OF CONTENTS

|       |                                                                 |     |
|-------|-----------------------------------------------------------------|-----|
| 1.0   | INTRODUCTION.....                                               | 4   |
| 1.1   | Scope .....                                                     | 4   |
| 1.2   | PCTEST Test Location .....                                      | 4   |
| 1.3   | Test Facility / Accreditations .....                            | 4   |
| 2.0   | PRODUCT INFORMATION .....                                       | 5   |
| 2.1   | Equipment Description .....                                     | 5   |
| 2.2   | Device Capabilities .....                                       | 5   |
| 2.3   | Test Configuration .....                                        | 6   |
| 2.4   | EMI Suppression Device(s)/Modifications .....                   | 6   |
| 3.0   | DESCRIPTION OF TESTS .....                                      | 7   |
| 3.1   | Evaluation Procedure .....                                      | 7   |
| 3.2   | AC Line Conducted Emissions .....                               | 7   |
| 3.3   | Radiated Emissions.....                                         | 8   |
| 3.4   | Environmental Conditions.....                                   | 8   |
| 4.0   | ANTENNA REQUIREMENTS .....                                      | 9   |
| 5.0   | MEASUREMENT UNCERTAINTY.....                                    | 10  |
| 6.0   | TEST EQUIPMENT CALIBRATION DATA.....                            | 11  |
| 7.0   | TEST RESULTS.....                                               | 12  |
| 7.1   | Summary .....                                                   | 12  |
| 7.2   | 6dB Bandwidth Measurement .....                                 | 13  |
| 7.3   | Output Power Measurement.....                                   | 24  |
| 7.4   | Power Spectral Density .....                                    | 28  |
| 7.5   | Conducted Emissions at the Band Edge .....                      | 40  |
| 7.6   | Conducted Spurious Emissions.....                               | 63  |
| 7.7   | Radiated Spurious Emission Measurements – Above 1 GHz.....      | 71  |
| 7.7.1 | SISO Antenna-1 Radiated Spurious Emission Measurements .....    | 74  |
| 7.7.2 | SISO Antenna-2 Radiated Spurious Emission Measurements .....    | 79  |
| 7.7.3 | MIMO/CDD Radiated Spurious Emission Measurements.....           | 84  |
| 7.7.4 | SISO Antenna-1 Radiated Restricted Band Edge Measurements ..... | 88  |
| 7.7.5 | SISO Antenna-2 Radiated Restricted Band Edge Measurements ..... | 93  |
| 7.7.6 | MIMO Radiated Restricted Band Edge Measurements .....           | 93  |
| 7.8   | Radiated Spurious Emissions Measurements – Below 1GHz .....     | 100 |
| 7.9   | Line-Conducted Test Data.....                                   | 105 |
| 8.0   | CONCLUSION .....                                                | 108 |

|                                         |                                                                                     |                                       |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  | MEASUREMENT REPORT<br>(CERTIFICATION) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                      | EUT Type:<br>Portable Tablet          | Page 2 of 108                                                                         |                                 |



# MEASUREMENT REPORT



| Mode    | Tx Frequency (MHz) | ANT1            |                  |                 |                  | ANT2            |                  |                 |                  | MIMO            |                  |                 |                  |
|---------|--------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|
|         |                    | Avg Conducted   |                  | Peak Conducted  |                  | Avg Conducted   |                  | Peak Conducted  |                  | Avg Conducted   |                  | Peak Conducted  |                  |
|         |                    | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) |
| 802.11b | 2412 - 2472        | 92.683          | 19.67            | 144.544         | 21.60            | 96.828          | 19.86            | 151.356         | 21.80            | N/A             |                  |                 |                  |
| 802.11g | 2412 - 2472        | 58.345          | 17.66            | 174.582         | 22.42            | 57.810          | 17.62            | 185.780         | 22.69            | 116.145         | 20.65            | 358.922         | 25.55            |
| 802.11n | 2412 - 2472        | 77.625          | 18.90            | 252.348         | 24.02            | 78.524          | 18.95            | 250.611         | 23.99            | 156.315         | 21.94            | 503.501         | 27.02            |

## EUT Overview

|                                         |                                                                                                                                                                                                                         |                              |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b>  |                              | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                                                                                                                                                          | EUT Type:<br>Portable Tablet | Page 3 of 108                   |

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

### 1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

|                                         |                                                                                     |                                       |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  | MEASUREMENT REPORT<br>(CERTIFICATION) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                      | EUT Type:<br>Portable Tablet          | Page 4 of 108                                                                         |                                 |

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Tablet FCC ID: A3LSMT867V**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN (DTS) transmitter.

**Test Device Serial No.:** 29333, 1022S, 29200, 29150, 29341

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), ANT+, Wireless Power Transfer

| Ch. | Frequency (MHz) | Ch. | Frequency (MHz) |
|-----|-----------------|-----|-----------------|
| 1   | 2412            | 8   | 2447            |
| 2   | 2417            | 9   | 2452            |
| 3   | 2422            | 10  | 2457            |
| 4   | 2427            | 11  | 2462            |
| 5   | 2432            | 12  | 2467            |
| 6   | 2437            | 13  | 2472            |
| 7   | 2442            |     |                 |

**Table 2-1. Frequency/ Channel Operations**

**Note:** The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of ANSI C63.10-2013 and KDB 558074 D01 v05r02. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

| Maximum Achievable Duty Cycles |   |                |      |          |
|--------------------------------|---|----------------|------|----------|
| 802.11 Mode/Band               |   | Duty Cycle [%] |      |          |
|                                |   | ANT1           | ANT2 | MIMO/CDD |
| 2.4GHz                         | b | 99.1           | 99.0 | N/A      |
|                                | g | 98.8           | 98.7 | 97.5     |
|                                | n | 98.7           | 98.6 | 97.4     |

**Table 2-2. Measured Duty Cycles**

|                                         |                                                                                     |                                       |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  | MEASUREMENT REPORT<br>(CERTIFICATION) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                      | EUT Type:<br>Portable Tablet          | Page 5 of 108                                                                         |                                 |

The device employs MIMO technology. Below are the possible configurations.

| WiFi Configurations |     | SISO |      | SDM  |      | CDD/MIMO |      |
|---------------------|-----|------|------|------|------|----------|------|
|                     |     | ANT1 | ANT2 | ANT1 | ANT2 | ANT1     | ANT2 |
| 5GHz                | 11b | ✓    | ✓    | ✗    | ✗    | ✗        | ✗    |
|                     | 11g | ✓    | ✓    | ✗    | ✗    | ✓        | ✓    |
|                     | 11n | ✓    | ✓    | ✓    | ✓    | ✓        | ✓    |

**Table 2-3. Frequency / Channel Operations**

✓ = Support ; ✗ = NOT Support

**SISO** = Single Input Single Output

**SDM** = Spatial Diversity Multiplexing – MIMO function

**CDD** = Cyclic Delay Diversity - 2Tx Function

Data Rates Supported: 1Mbps, 2Mbps, 5.5Mbps, 11Mbps (b)  
 6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps (g)  
 6.5/7.2Mbps, 13/14.4Mbps, 19.5/21.7Mbps, 26/28.9Mbps, 39/43.3Mbps,  
 52/57.8Mbps, 58.5/65Mbps, 65/72.2Mbps (n)  
 13/14.4Mbps, 26/28.9Mbps, 39/43.3Mbps, 52/57.8Mbps, 78/86.7Mbps,  
 104/115.6Mbps, 117/130Mbps, 130/144.4Mbps (MIMO n)

## 2.3 Test Configuration

The EUT was tested per the guidance of KDB 558074 D01 v05r02. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5, and 7.6 for antenna port conducted emissions test setups.

## 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

|                                         |                                                                                     |                                       |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  | MEASUREMENT REPORT<br>(CERTIFICATION) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                      | EUT Type:<br>Portable Tablet          | Page 6 of 108                                                                         |                                 |

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 558074 D01 v05r02 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

### 3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.9. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

|                                         |                                                                                     |                                       |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  | MEASUREMENT REPORT<br>(CERTIFICATION) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                      | EUT Type:<br>Portable Tablet          | Page 7 of 108                                                                         |                                 |

### 3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

### 3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

|                                         |                                                                                     |                                       |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  | MEASUREMENT REPORT<br>(CERTIFICATION) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                      | EUT Type:<br>Portable Tablet          | Page 8 of 108                                                                         |                                 |

## 4.0 ANTENNA REQUIREMENTS

### Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connections to an external antenna.

### Conclusion:

The EUT unit complies with the requirement of §15.203.

|                                         |                                                                                     |                                       |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  | MEASUREMENT REPORT<br>(CERTIFICATION) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                      | EUT Type:<br>Portable Tablet          | Page 9 of 108                                                                         |                                 |

## 5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Contribution                     | Expanded Uncertainty ( $\pm$ dB) |
|----------------------------------|----------------------------------|
| Conducted Bench Top Measurements | 1.13                             |
| Line Conducted Disturbance       | 3.09                             |
| Radiated Disturbance (<1GHz)     | 4.98                             |
| Radiated Disturbance (>1GHz)     | 5.07                             |
| Radiated Disturbance (>18GHz)    | 5.09                             |

|                                         |                                                                                     |                                       |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  | MEASUREMENT REPORT<br>(CERTIFICATION) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                      | EUT Type:<br>Portable Tablet          |                                                                                       | Page 10 of 108                  |

## 6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

| Manufacturer      | Model            | Description                          | Cal Date   | Cal Interval | Cal Due    | Serial Number |
|-------------------|------------------|--------------------------------------|------------|--------------|------------|---------------|
| -                 | WL25-1           | Conducted Cable Set (25GHz)          | 6/5/2019   | Annual       | 6/5/2020   | WL25-1        |
| Agilent           | N9020A           | MXA Signal Analyzer                  | 4/20/2019  | Annual       | 4/20/2020  | US46470561    |
| Anritsu           | MA2411B          | Pulse Power Sensor                   | 8/22/2018  | Annual       | 8/22/2019  | 1315051       |
| Anritsu           | ML2495A          | Power Meter                          | 10/5/2018  | Annual       | 10/5/2019  | 1328004       |
| Com-Power         | PAM-103          | Pre-Amplifier (1-1000MHz)            | 8/8/2018   | Annual       | 8/8/2019   | 441128        |
| Com-Power         | AL-130           | 9kHz - 30MHz Loop Antenna            | 10/10/2017 | Biennial     | 10/10/2019 | 121034        |
| Emco              | 3116             | Horn Antenna (18 - 40GHz)            | 6/7/2018   | Biennial     | 6/7/2020   | 9203-2178     |
| Huber + Suhner    | Sucoflex 102A    | 40GHz Radiated Cable Set             | 8/23/2018  | Annual       | 8/23/2019  | 251425001     |
| Pasternack        | NMLC-2           | Line Conducted Emissions Cable (NM)  | 8/23/2018  | Annual       | 8/23/2019  | NMLC-2        |
| Rohde & Schwarz   | TS-PR26          | 18-26.5 GHz Pre-Amplifier            | 9/19/2018  | Annual       | 9/19/2019  | 100040        |
| Rohde & Schwarz   | ESU26            | EMI Test Receiver (26.5GHz)          | 6/5/2019   | Annual       | 6/5/2020   | 100342        |
| Rohde & Schwarz   | ESU40            | EMI Test Receiver (40GHz)            | 8/9/2018   | Annual       | 8/9/2019   | 100348        |
| Rohde & Schwarz   | SFUNIT-Rx        | Shielded Filter Unit                 | 7/18/2018  | Annual       | 7/18/2019  | 102134        |
| Solar Electronics | 8012-50-R-24-BNC | Line Impedance Stabilization Network | 8/14/2017  | Biennial     | 8/14/2019  | 310233        |
| Sunol             | DRH-118          | Horn Antenna (1-18GHz)               | 8/11/2017  | Biennial     | 8/11/2019  | A050307       |
| Sunol             | JB5              | Bi-Log Antenna (30M - 5GHz)          | 4/19/2018  | Biennial     | 4/19/2020  | A051107       |

**Table 6-1. Annual Test Equipment Calibration Schedule**

### Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

|                                         |                                                                                     |                                       |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  | MEASUREMENT REPORT<br>(CERTIFICATION) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                      | EUT Type:<br>Portable Tablet          | Page 11 of 108                                                                        |                                 |

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: Samsung Electronics Co., Ltd.

FCC ID: A3LSMT867V

FCC Classification: Digital Transmission System (DTS)

| FCC Part Section(s) | RSS Section(s) | Test Description                                                              | Test Limit                                                                                     | Test Condition | Test Result | Reference         |
|---------------------|----------------|-------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|----------------|-------------|-------------------|
| 15.247(a)(2)        | RSS-247 [5.2]  | 6dB Bandwidth                                                                 | > 500kHz                                                                                       | CONDUCTED      | PASS        | Section 7.2       |
| 15.247(b)(3)        | RSS-247 [5.4]  | Transmitter Output Power                                                      | < 1 Watt                                                                                       |                | PASS        | Sections 7.3      |
| 15.247(e)           | RSS-247 [5.2]  | Transmitter Power Spectral Density                                            | < 8dBm / 3kHz Band                                                                             |                | PASS        | Section 7.4       |
| 15.247(d)           | RSS-247 [5.5]  | Band Edge / Out-of-Band Emissions                                             | ≥ 20dBc                                                                                        |                | PASS        | Sections 7.5, 7.6 |
| 15.205<br>15.209    | RSS-Gen [8.9]  | General Field Strength Limits (Restricted Bands and Radiated Emission Limits) | Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9]) | RADIATED       | PASS        | Sections 7.7, 7.8 |
| 15.207              | RSS-Gen [8.8]  | AC Conducted Emissions 150kHz – 30MHz                                         | < FCC 15.207 limits (RSS-Gen[8.8])                                                             | LINE CONDUCTED | PASS        | Section 7.9       |

**Table 7-1. Summary of Test Results**

#### Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "WLAN Automation," Version 3.5.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Automation," Version 0.2.16.

|                                         |                                                                                     |                                       |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  | MEASUREMENT REPORT<br>(CERTIFICATION) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04-A3L | Test Dates:<br>6/7 - 7/22/2019                                                      | EUT Type:<br>Portable Tablet          | Page 12 of 108                                                                        |                                 |

## 7.2 6dB Bandwidth Measurement

§15.247(a.2); RSS-247 [5.2]

### Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

***The minimum permissible 6dB bandwidth is 500 kHz.***

### Test Procedure Used

ANSI C63.10-2013 – Section 11.8.2 Option 2

KDB 558074 D01 v05r02 – Section 8.2

### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 6$ . The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100kHz
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-1. Test Instrument & Measurement Setup**

### Test Notes


None

|                                         |                                                                                                                                                                                                                         |                              |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b>  |                              | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                                                                                                                                                          | EUT Type:<br>Portable Tablet | Page 13 of 108                  |

## SISO Antenna-1 6 dB Bandwidth Measurements


| Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured Bandwidth [MHz] | Minimum Bandwidth [MHz] |
|-----------------|-------------|-------------|------------------|--------------------------|-------------------------|
| 2412            | 1           | b           | 1                | 9.089                    | 0.500                   |
| 2437            | 6           | b           | 1                | 9.555                    | 0.500                   |
| 2462            | 11          | b           | 1                | 9.604                    | 0.500                   |
| 2412            | 1           | g           | 6                | 13.85                    | 0.500                   |
| 2437            | 6           | g           | 6                | 13.86                    | 0.500                   |
| 2462            | 11          | g           | 6                | 13.76                    | 0.500                   |
| 2412            | 1           | n           | 6.5/7.2 (MCS0)   | 13.86                    | 0.500                   |
| 2437            | 6           | n           | 6.5/7.2 (MCS0)   | 13.85                    | 0.500                   |
| 2462            | 11          | n           | 6.5/7.2 (MCS0)   | 15.07                    | 0.500                   |

Table 7-2. Conducted Bandwidth Measurements SISO ANT1

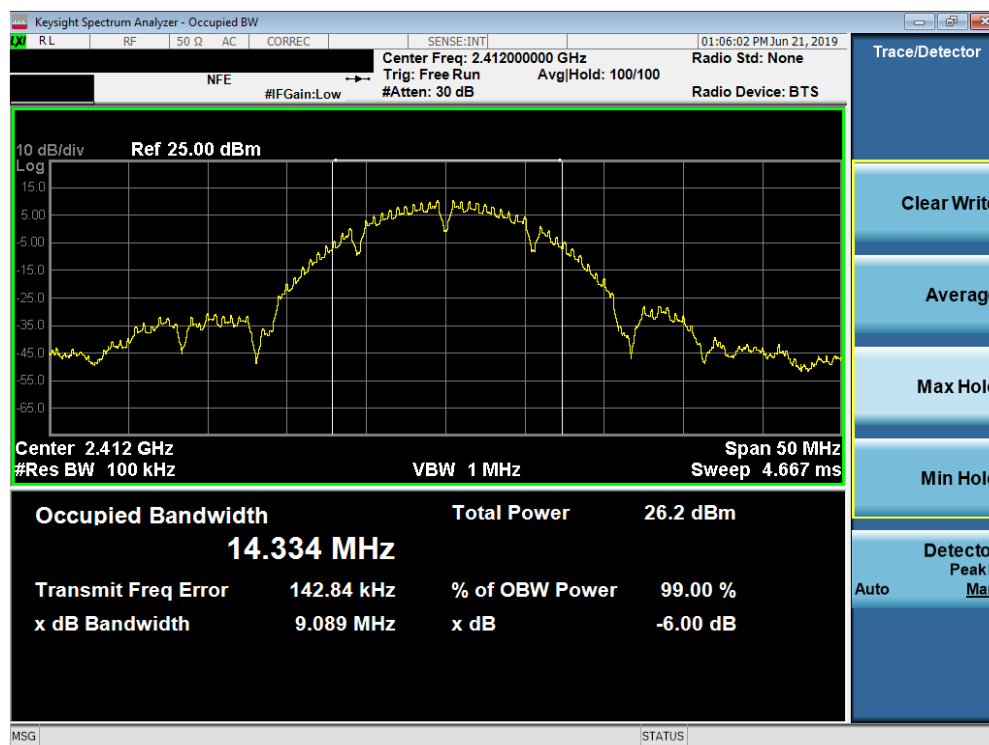


Plot 7-1. 6dB Bandwidth Plot SISO ANT1 (802.11b – Ch. 1)

|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04-A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 14 of 108                  |

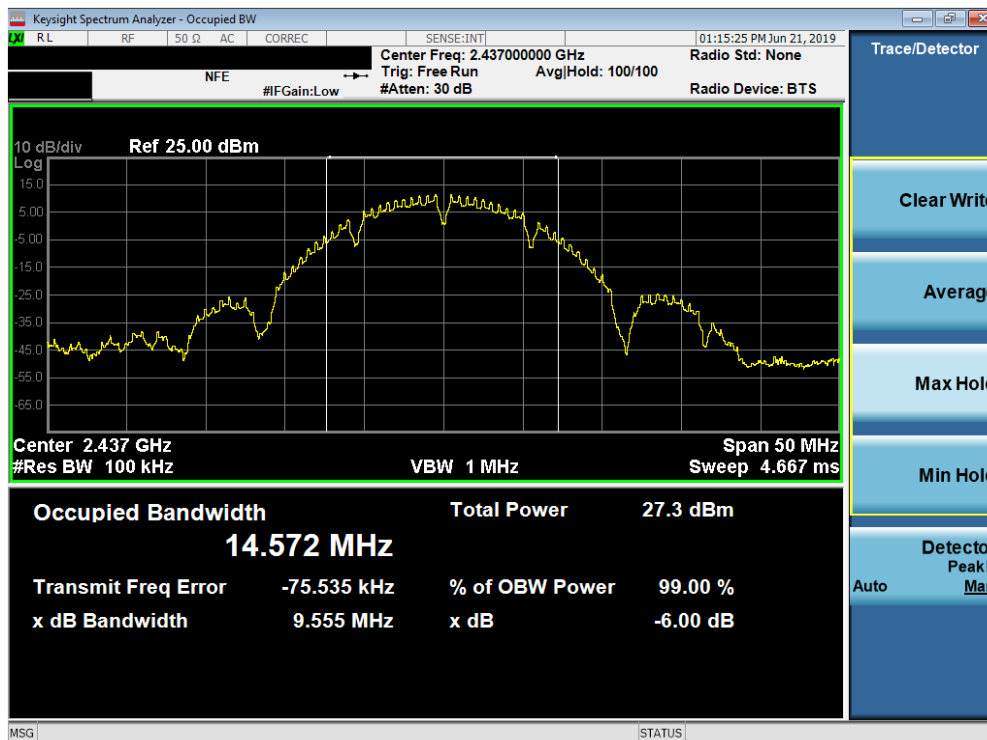


Plot 7-2. 6dB Bandwidth Plot SISO ANT1 (802.11b – Ch. 6)

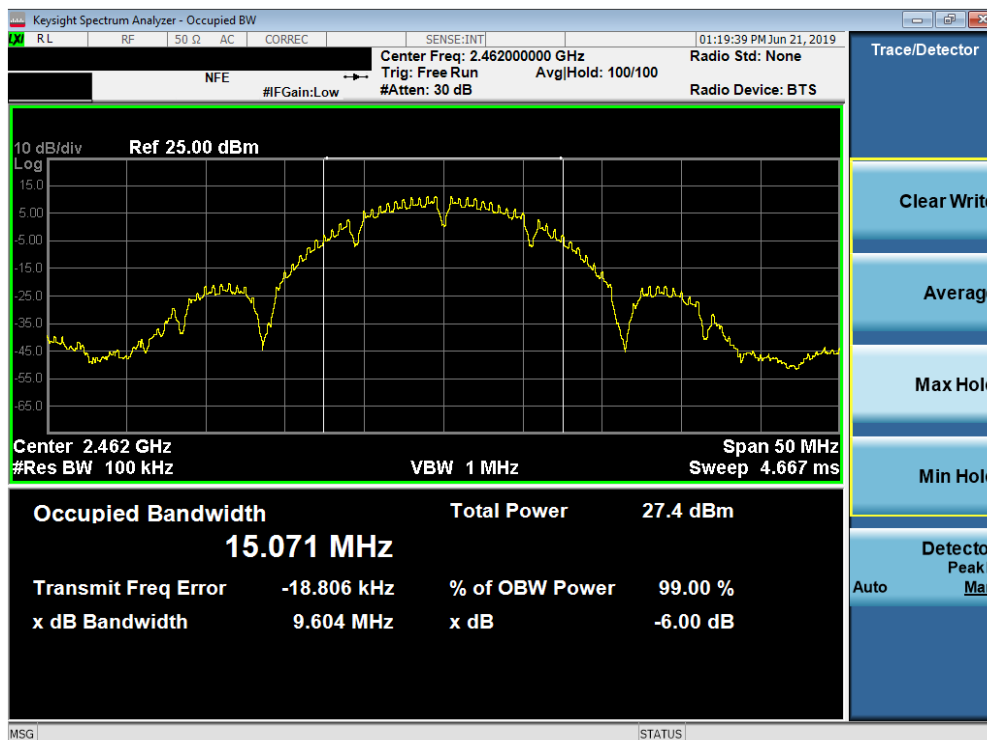


Plot 7-3. 6dB Bandwidth Plot SISO ANT1 (802.11b – Ch. 11)

|                                         |                                                                                                                                                                                                                        |                              |                                 |
|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  <b>MEASUREMENT REPORT</b><br>(CERTIFICATION)  |                              | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                                                                                                                                                         | EUT Type:<br>Portable Tablet | Page 15 of 108                  |

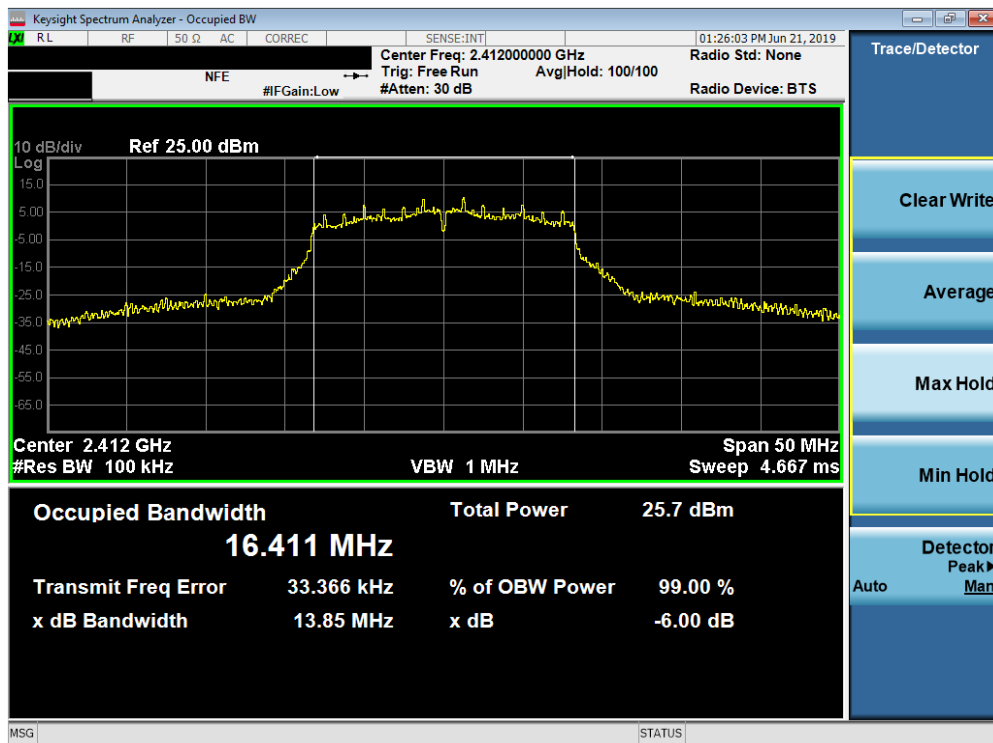


Plot 7-4. 6dB Bandwidth Plot SISO ANT1 (802.11g - Ch. 1)

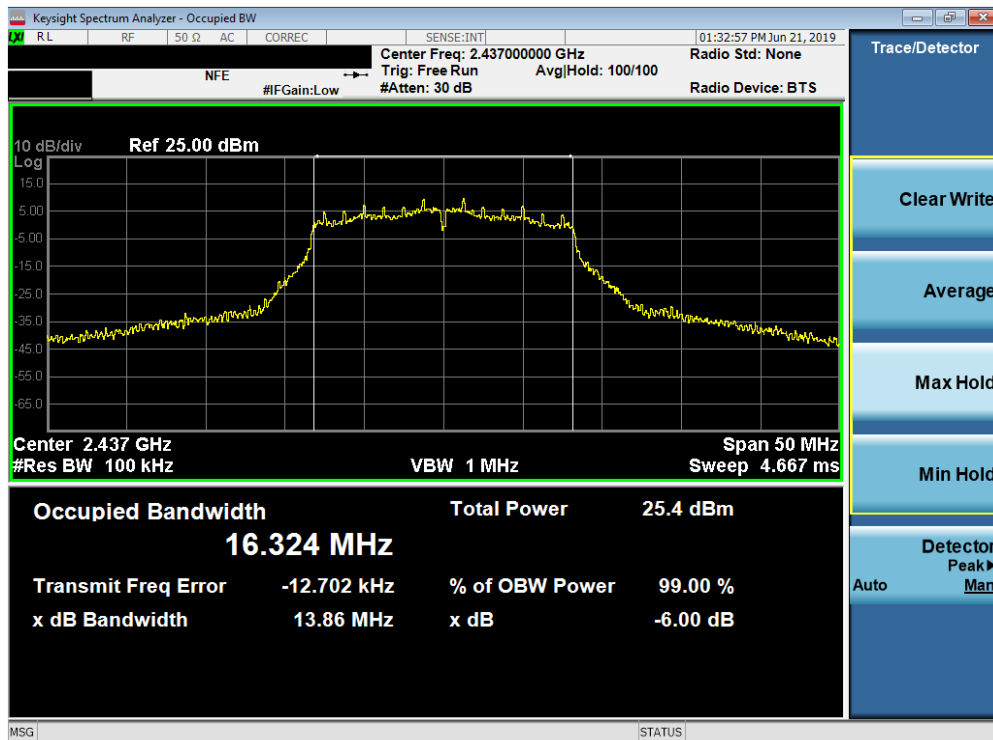


Plot 7-5. 6dB Bandwidth Plot SISO ANT1 (802.11g - Ch. 6)

|                                         |                                              |                              |  |                                 |
|-----------------------------------------|----------------------------------------------|------------------------------|--|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                              |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019               | EUT Type:<br>Portable Tablet |  | Page 16 of 108                  |

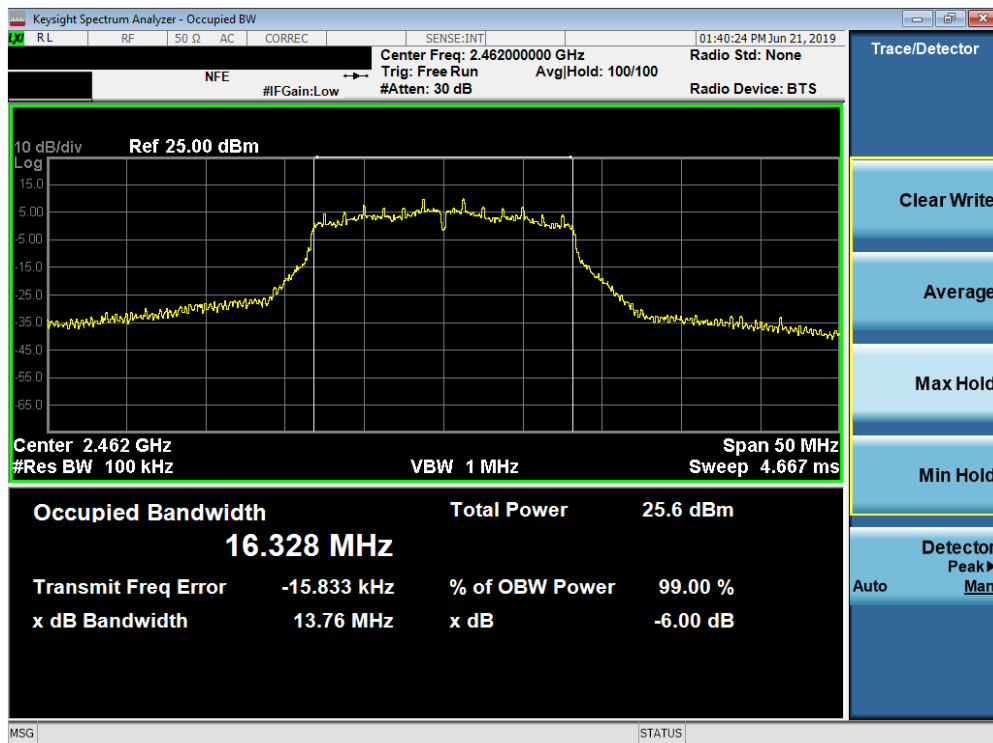


Plot 7-6. 6dB Bandwidth Plot SISO ANT1 (802.11g - Ch. 11)

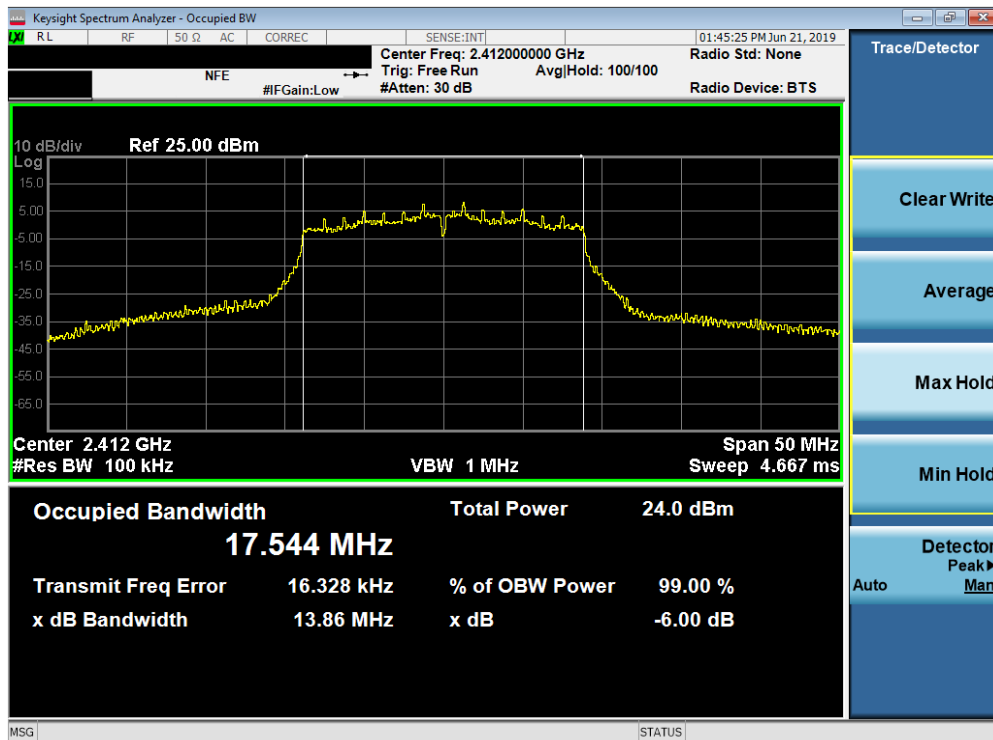


Plot 7-7. 6dB Bandwidth Plot SISO ANT1 (802.11n (2.4GHz) - Ch. 1)

|                                         |                                              |                              |  |                                 |
|-----------------------------------------|----------------------------------------------|------------------------------|--|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                              |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019               | EUT Type:<br>Portable Tablet |  | Page 17 of 108                  |

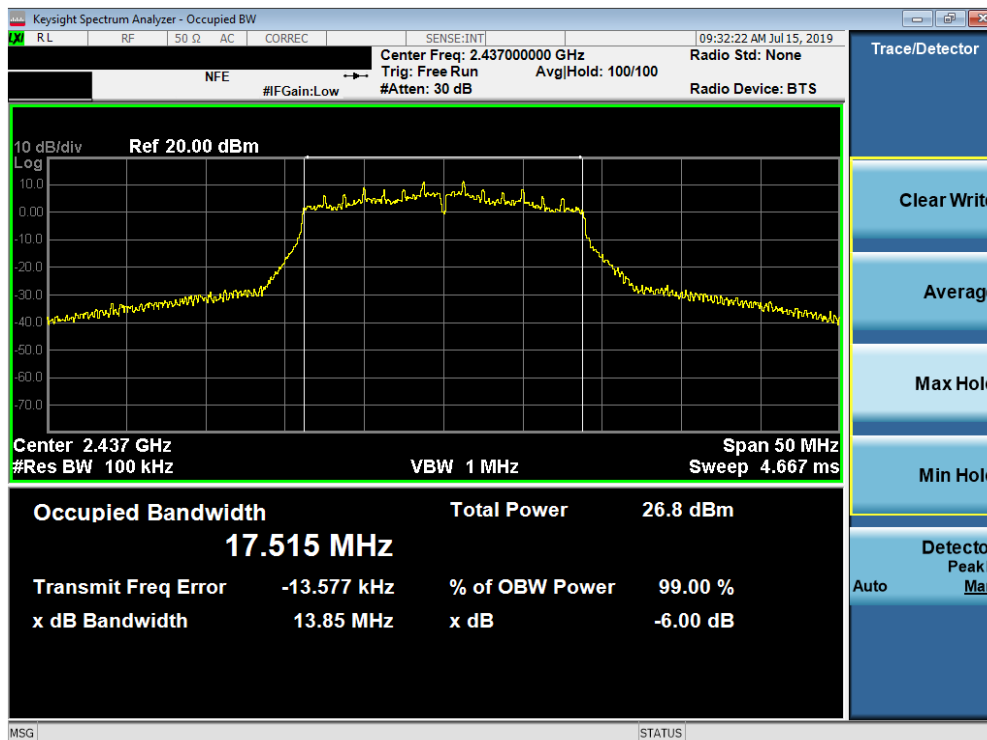

Plot 7-8. 6dB Bandwidth Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 6)

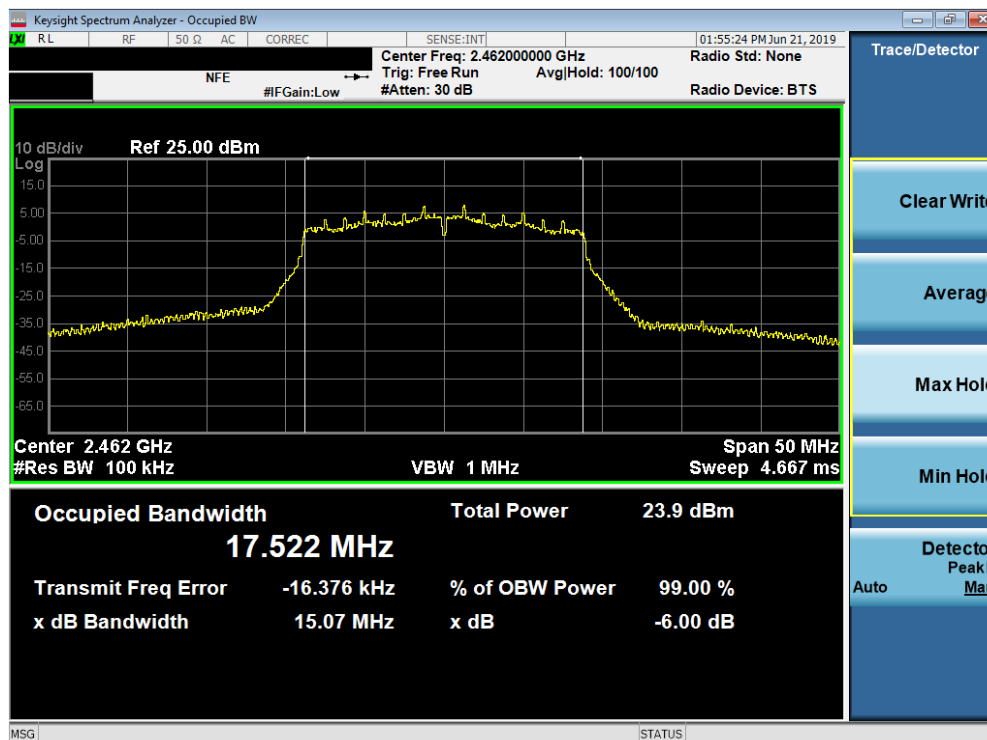


Plot 7-9. 6dB Bandwidth Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 11)

|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 18 of 108                  |

## SISO Antenna-2 6 dB Bandwidth Measurements


| Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured Bandwidth [MHz] | Minimum Bandwidth [MHz] |
|-----------------|-------------|-------------|------------------|--------------------------|-------------------------|
| 2412            | 1           | b           | 1                | 10.083                   | 0.500                   |
| 2437            | 6           | b           | 1                | 9.099                    | 0.500                   |
| 2462            | 11          | b           | 1                | 9.585                    | 0.500                   |
| 2412            | 1           | g           | 6                | 15.05                    | 0.500                   |
| 2437            | 6           | g           | 6                | 15.09                    | 0.500                   |
| 2462            | 11          | g           | 6                | 15.07                    | 0.500                   |
| 2412            | 1           | n           | 6.5/7.2 (MCS0)   | 13.83                    | 0.500                   |
| 2437            | 6           | n           | 6.5/7.2 (MCS0)   | 15.03                    | 0.500                   |
| 2462            | 11          | n           | 6.5/7.2 (MCS0)   | 15.03                    | 0.500                   |

Table 7-3. Conducted Bandwidth Measurements SISO ANT2

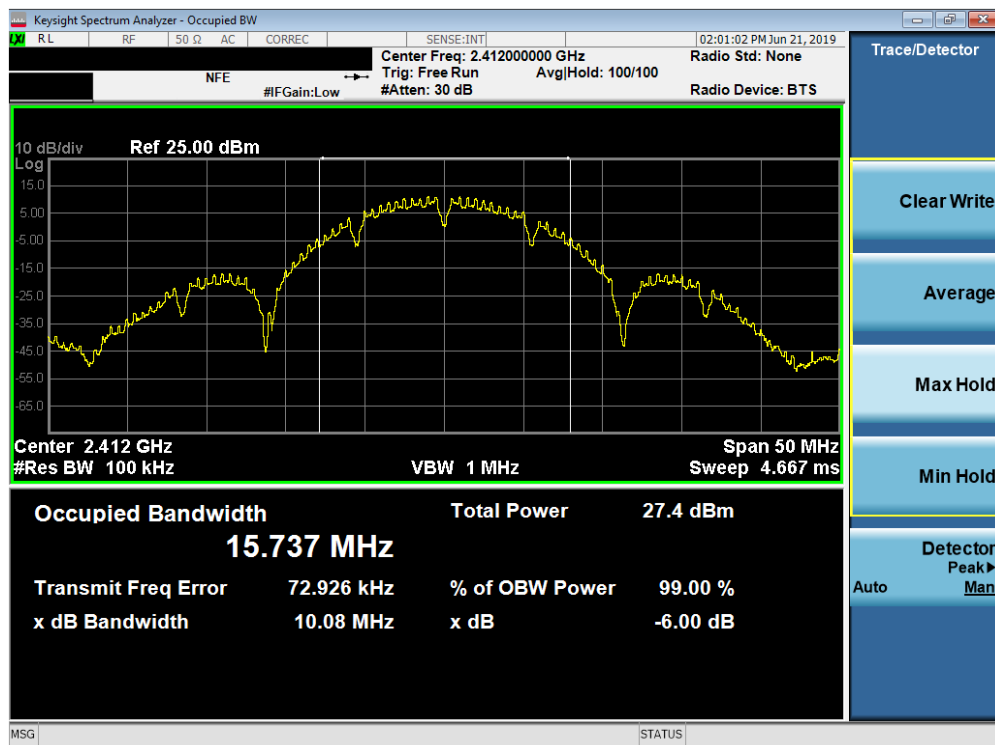


Plot 7-10. 6dB Bandwidth Plot SISO ANT2 (802.11b – Ch. 1)

|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 19 of 108                  |

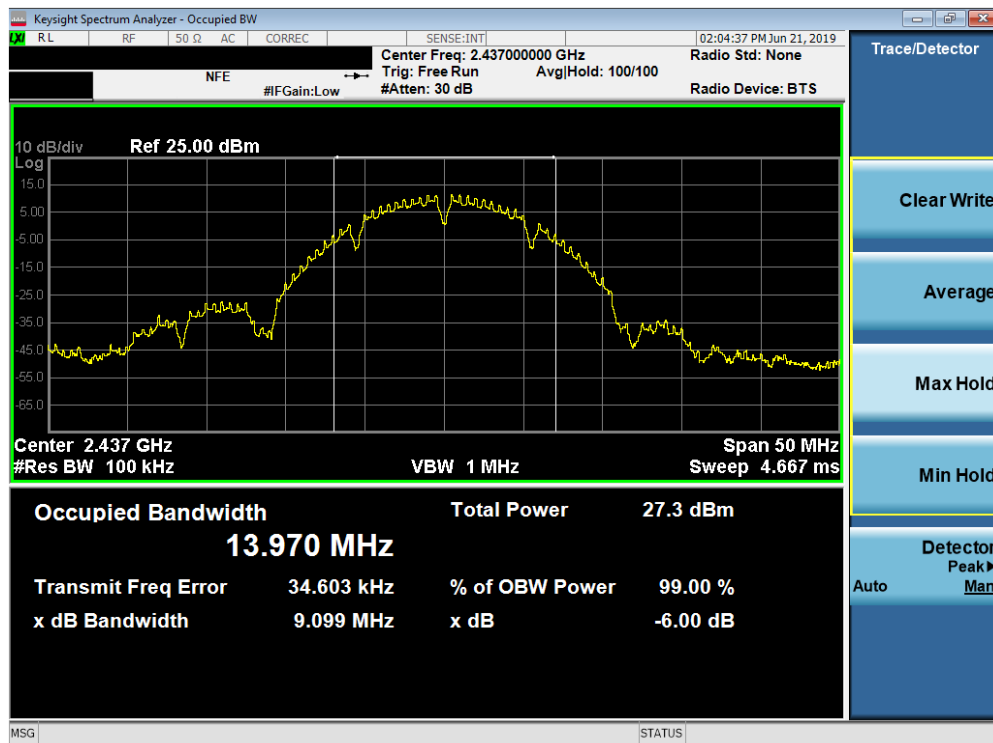


Plot 7-11. 6dB Bandwidth Plot SISO ANT2 (802.11b – Ch. 6)

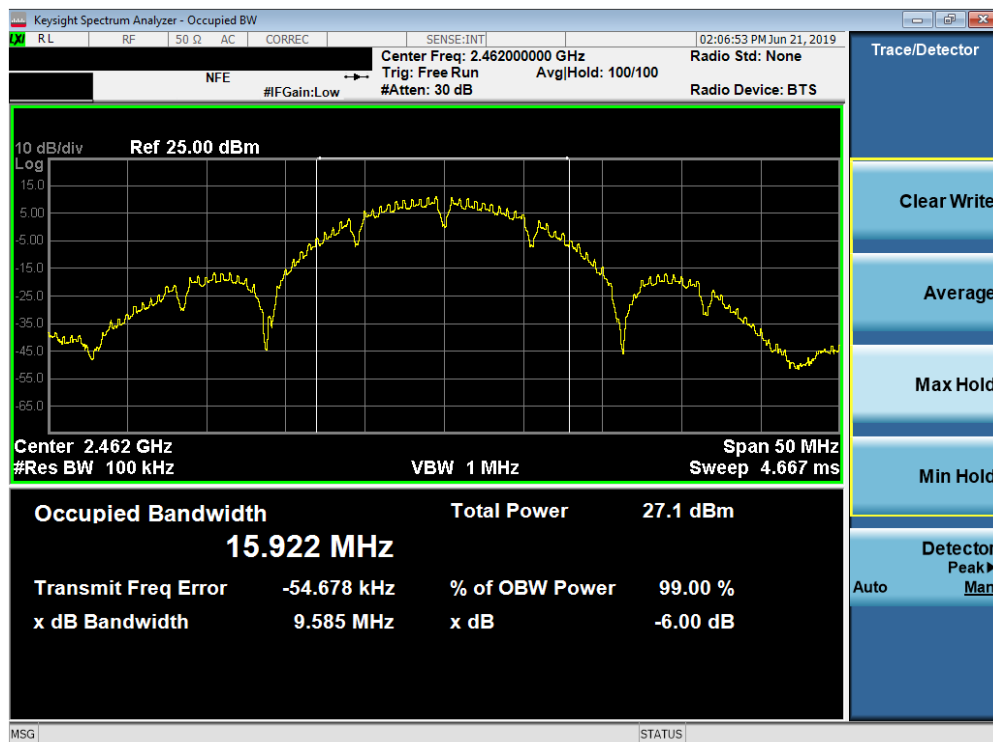


Plot 7-12. 6dB Bandwidth Plot SISO ANT2 (802.11b – Ch. 11)

|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 20 of 108                  |

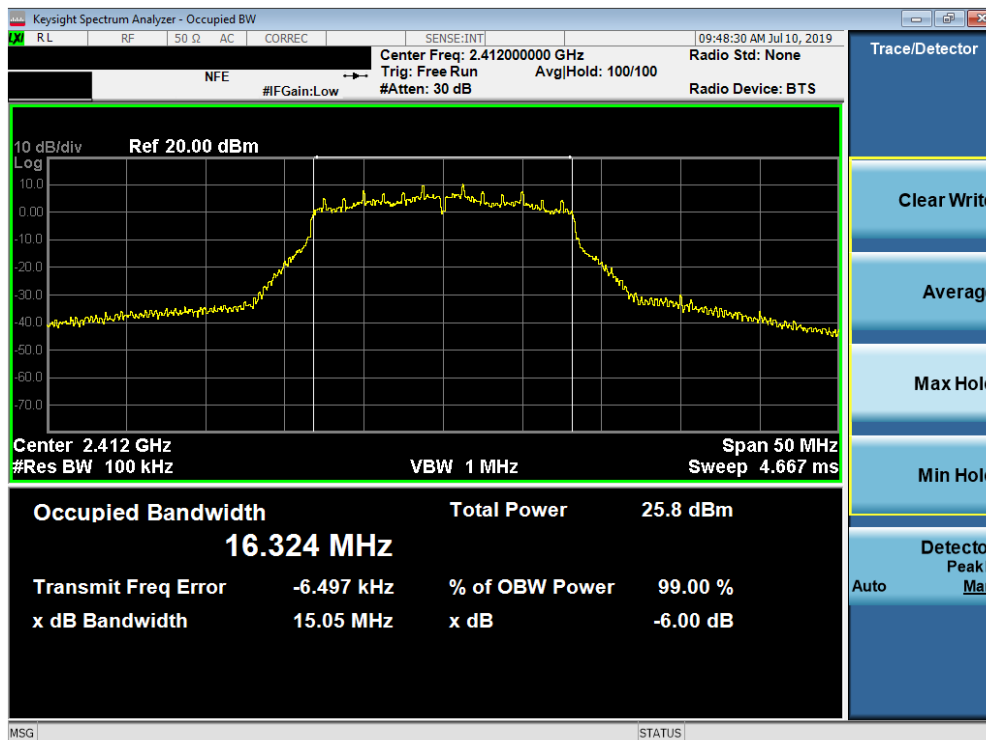


Plot 7-13. 6dB Bandwidth Plot SISO ANT2 (802.11g - Ch. 1)

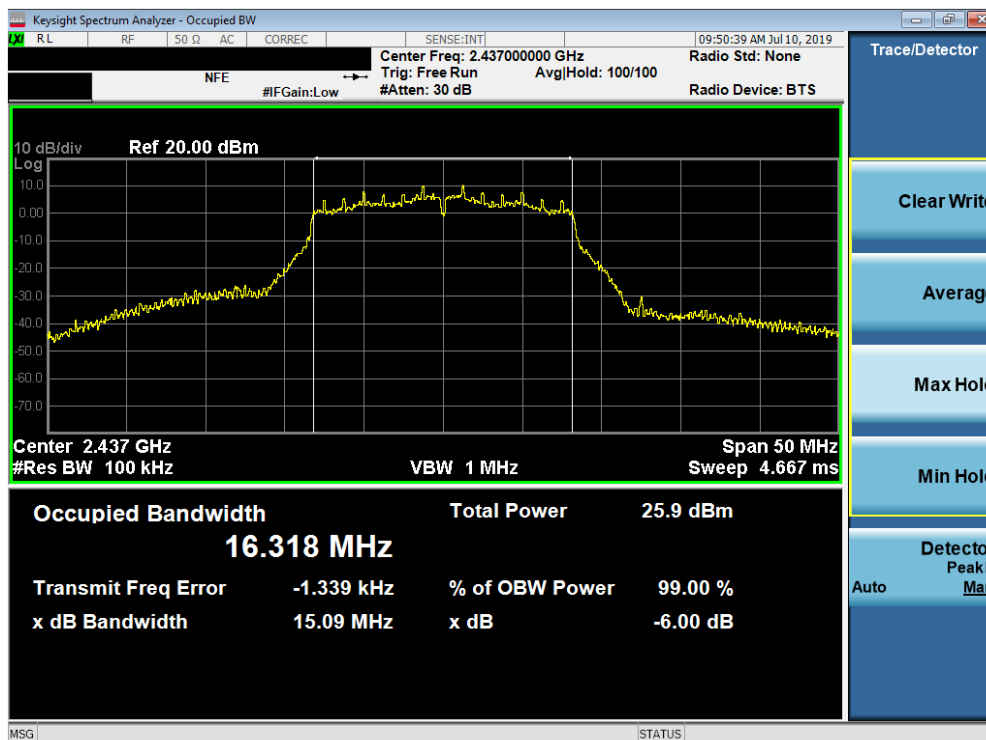


Plot 7-14. 6dB Bandwidth Plot SISO ANT2 (802.11g - Ch. 6)

|                                         |                                              |                              |                |                                 |
|-----------------------------------------|----------------------------------------------|------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                              |                | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019               | EUT Type:<br>Portable Tablet | Page 21 of 108 |                                 |

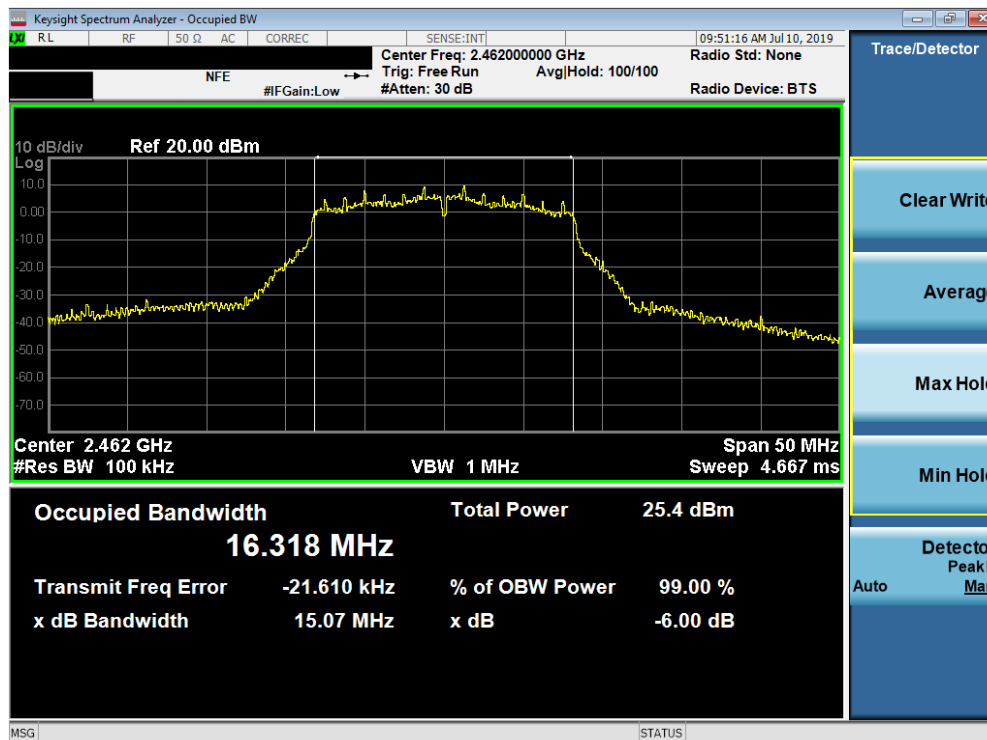


Plot 7-15. 6dB Bandwidth Plot SISO ANT2 (802.11g – Ch. 11)

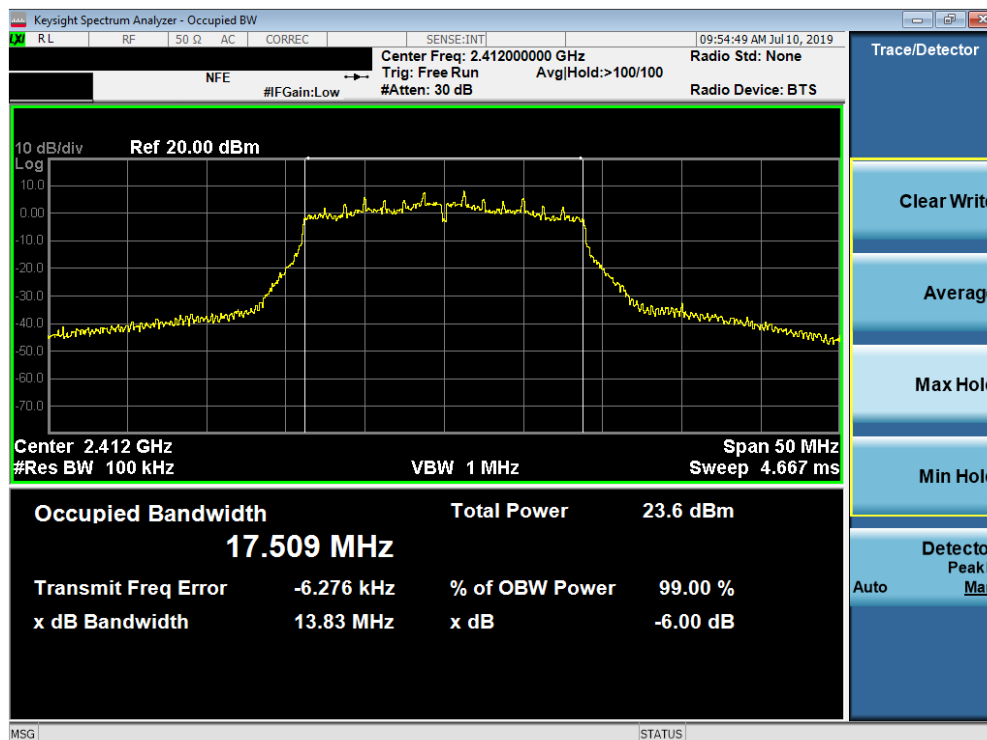


Plot 7-16. 6dB Bandwidth Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 1)

|                                         |                                               |                              |  |                                 |
|-----------------------------------------|-----------------------------------------------|------------------------------|--|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                              |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet |  | Page 22 of 108                  |

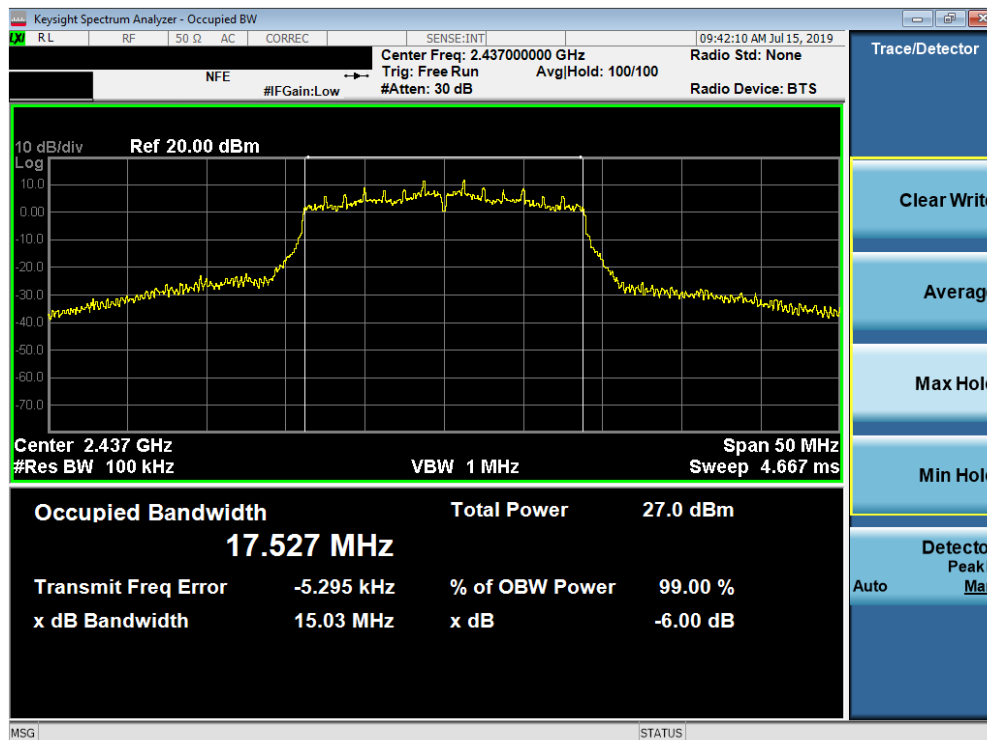

Plot 7-17. 6dB Bandwidth Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 6)

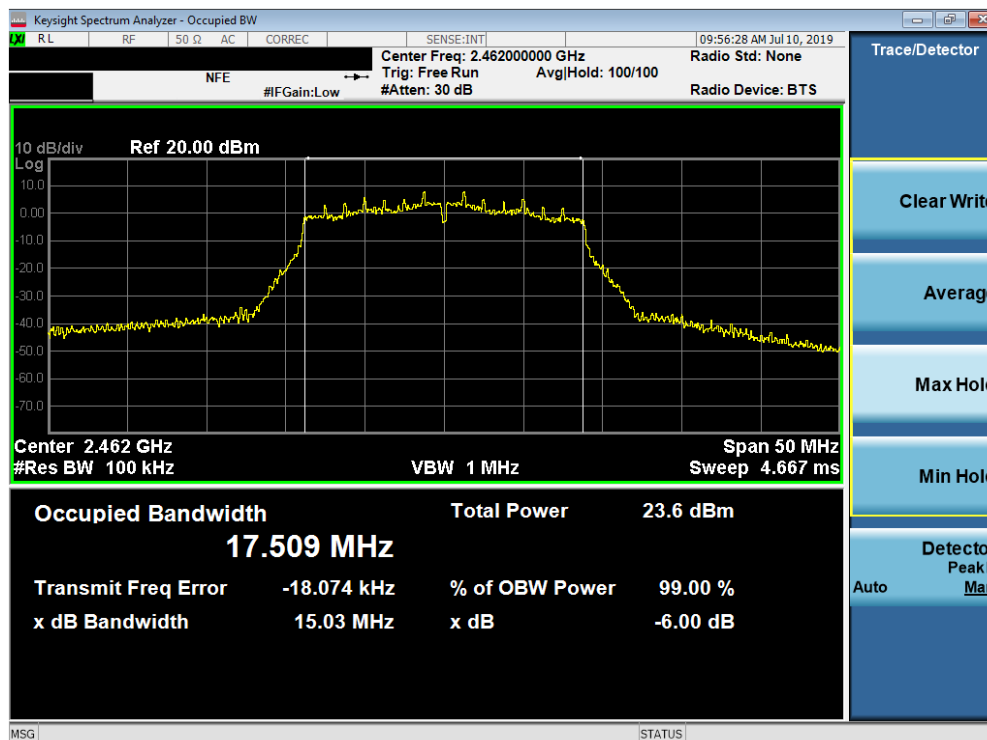

Plot 7-18. 6dB Bandwidth Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 11)

|                                         |                                              |                              |  |                                 |
|-----------------------------------------|----------------------------------------------|------------------------------|--|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                              |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019               | EUT Type:<br>Portable Tablet |  | Page 23 of 108                  |

## 7.3 Output Power Measurement

§15.247(b.3); RSS-247 [5.4]

### Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

***The maximum permissible conducted output power is 1 Watt.***

### Test Procedure Used

ANSI C63.10-2013 – Section 11.9.1.3 PKPM1 Peak Power Method  
KDB 558074 D01 v05r02 – Section 8.3.1.3 PKPM1 Peak-reading Power Meter Method  
ANSI C63.10-2013 – Section 11.9.2.3.2 Method AVGPM-G  
KDB 558074 D01 v05r02 – Section 8.3.2.3 Measurement using a Power Meter (PM)  
ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique  
KDB 662911 D01 v02r01 – Section E)1) Measure-and-Sum Technique

### Test Settings

#### Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

#### Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.



**Figure 7-2. Test Instrument & Measurement Setup for Power Meter Measurements**

### Test Notes

None

|                                         |                                                                                                                                                                                                                         |                              |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b>  |                              | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                                                                                                                                                          | EUT Type:<br>Portable Tablet | Page 24 of 108                  |

| 2.4GHz | Freq [MHz] | Channel | Detector | IEEE Transmission Mode |         |         |
|--------|------------|---------|----------|------------------------|---------|---------|
|        |            |         |          | 802.11b                | 802.11g | 802.11n |
|        | 2412       | 1       | AVG      | 17.84                  | 14.75   | 12.35   |
|        |            |         | PEAK     | 20.08                  | 19.84   | 17.35   |
|        | 2417       | 2       | AVG      | 19.22                  | 16.27   | 17.42   |
|        |            |         | PEAK     | 21.25                  | 20.73   | 20.98   |
|        | 2422       | 3       | AVG      |                        | 17.34   | 18.84   |
|        |            |         | PEAK     |                        | 22.12   | 23.78   |
|        | 2437       | 6       | AVG      | 19.67                  | 17.66   | 18.90   |
|        |            |         | PEAK     | 21.60                  | 22.42   | 24.02   |
|        | 2452       | 9       | AVG      |                        | 17.43   | 16.57   |
|        |            |         | PEAK     |                        | 22.21   | 20.54   |
|        | 2457       | 10      | AVG      | 19.53                  | 15.58   | 16.28   |
|        |            |         | PEAK     | 21.54                  | 20.84   | 20.08   |
|        | 2462       | 11      | AVG      | 18.12                  | 14.12   | 13.25   |
|        |            |         | PEAK     | 20.35                  | 18.94   | 18.18   |
|        | 2467       | 12      | AVG      | 5.90                   | 5.62    | 5.41    |
|        |            |         | PEAK     | 8.11                   | 10.51   | 10.42   |
|        | 2472       | 13      | AVG      | 5.90                   | 3.37    | 1.88    |
|        |            |         | PEAK     | 8.31                   | 8.48    | 6.54    |

Table 7-4. Conducted Output Power Measurements SISO ANT1

| 2.4GHz | Freq [MHz] | Channel | Detector | IEEE Transmission Mode |         |         |
|--------|------------|---------|----------|------------------------|---------|---------|
|        |            |         |          | 802.11b                | 802.11g | 802.11n |
|        | 2412       | 1       | AVG      | 18.49                  | 14.96   | 12.82   |
|        |            |         | PEAK     | 20.51                  | 19.98   | 20.93   |
|        | 2417       | 2       | AVG      | 19.73                  | 16.37   | 17.32   |
|        |            |         | PEAK     | 21.64                  | 21.30   | 21.10   |
|        | 2422       | 3       | AVG      |                        | 17.51   | 18.81   |
|        |            |         | PEAK     |                        | 22.45   | 23.37   |
|        | 2437       | 6       | AVG      | 19.65                  | 17.62   | 18.95   |
|        |            |         | PEAK     | 21.80                  | 22.65   | 23.99   |
|        | 2452       | 9       | AVG      |                        | 17.54   | 16.64   |
|        |            |         | PEAK     |                        | 22.69   | 20.61   |
|        | 2457       | 10      | AVG      | 19.86                  | 15.79   | 16.44   |
|        |            |         | PEAK     | 21.76                  | 20.63   | 20.48   |
|        | 2462       | 11      | AVG      | 18.25                  | 13.75   | 13.28   |
|        |            |         | PEAK     | 20.24                  | 18.54   | 18.25   |
|        | 2467       | 12      | AVG      | 5.70                   | 5.43    | 5.53    |
|        |            |         | PEAK     | 7.90                   | 10.26   | 10.39   |
|        | 2472       | 13      | AVG      | 5.66                   | 3.04    | 1.42    |
|        |            |         | PEAK     | 7.81                   | 7.88    | 6.41    |

Table 7-5. Conducted Output Power Measurements SISO ANT2

|                                         |                                                                                     |                              |                                       |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  |                              | MEASUREMENT REPORT<br>(CERTIFICATION) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                      | EUT Type:<br>Portable Tablet |                                       |                                                                                       | Page 25 of 108                  |

| 2.4GHz | Freq [MHz] | Channel | Detector | Conducted Power [dBm] |       |       |
|--------|------------|---------|----------|-----------------------|-------|-------|
|        |            |         |          | ANT1                  | ANT2  | MIMO  |
|        | 2412       | 1       | AVG      | 14.75                 | 14.96 | 17.87 |
|        |            |         | PEAK     | 19.84                 | 19.98 | 22.92 |
|        | 2417       | 2       | AVG      | 16.27                 | 16.37 | 19.33 |
|        |            |         | PEAK     | 20.73                 | 21.30 | 24.03 |
|        | 2422       | 3       | AVG      | 17.34                 | 17.51 | 20.44 |
|        |            |         | PEAK     | 22.12                 | 22.45 | 25.30 |
|        | 2437       | 6       | AVG      | 17.66                 | 17.62 | 20.65 |
|        |            |         | PEAK     | 22.42                 | 22.65 | 25.55 |
|        | 2452       | 9       | AVG      | 17.43                 | 17.54 | 20.50 |
|        |            |         | PEAK     | 22.21                 | 22.69 | 25.47 |
|        | 2457       | 10      | AVG      | 15.58                 | 15.79 | 18.70 |
|        |            |         | PEAK     | 20.84                 | 20.63 | 23.75 |
|        | 2462       | 11      | AVG      | 14.12                 | 13.75 | 16.95 |
|        |            |         | PEAK     | 18.94                 | 18.54 | 21.75 |
|        | 2467       | 12      | AVG      | 5.62                  | 5.43  | 8.54  |
|        |            |         | PEAK     | 10.51                 | 10.26 | 13.40 |
|        | 2472       | 13      | AVG      | 3.37                  | 3.04  | 6.22  |
|        |            |         | PEAK     | 8.48                  | 7.88  | 11.20 |

Table 7-6. Conducted Output Power Measurements MIMO (802.11g)

| 2.4GHz | Freq [MHz] | Channel | Detector | Conducted Power [dBm] |       |       |
|--------|------------|---------|----------|-----------------------|-------|-------|
|        |            |         |          | ANT1                  | ANT2  | MIMO  |
|        | 2412       | 1       | AVG      | 12.35                 | 12.82 | 15.60 |
|        |            |         | PEAK     | 17.35                 | 20.93 | 22.51 |
|        | 2417       | 2       | AVG      | 17.42                 | 17.32 | 20.38 |
|        |            |         | PEAK     | 20.98                 | 21.10 | 24.05 |
|        | 2422       | 3       | AVG      | 18.84                 | 18.81 | 21.84 |
|        |            |         | PEAK     | 23.78                 | 23.37 | 26.59 |
|        | 2437       | 6       | AVG      | 18.90                 | 18.95 | 21.94 |
|        |            |         | PEAK     | 24.02                 | 23.99 | 27.02 |
|        | 2452       | 9       | AVG      | 16.57                 | 16.64 | 19.62 |
|        |            |         | PEAK     | 20.54                 | 20.61 | 23.59 |
|        | 2457       | 10      | AVG      | 16.28                 | 16.44 | 19.37 |
|        |            |         | PEAK     | 20.08                 | 20.48 | 23.29 |
|        | 2462       | 11      | AVG      | 13.25                 | 13.28 | 16.28 |
|        |            |         | PEAK     | 18.18                 | 18.25 | 21.23 |
|        | 2467       | 12      | AVG      | 5.41                  | 5.53  | 8.48  |
|        |            |         | PEAK     | 10.42                 | 10.39 | 13.42 |
|        | 2472       | 13      | AVG      | 1.88                  | 1.42  | 4.67  |
|        |            |         | PEAK     | 6.54                  | 6.41  | 9.49  |

Table 7-7. Conducted Output Power Measurements MIMO (802.11n)

|                                         |                                                                                     |                              |                                       |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  |                              | MEASUREMENT REPORT<br>(CERTIFICATION) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                      | EUT Type:<br>Portable Tablet |                                       |                                                                                       | Page 26 of 108                  |

**Note:**

Per ANSI C63.10-2013 and KDB 662911 D01 v02r01 Section E)1), the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

**Sample MIMO Calculation:**

At 2437MHz the average conducted output power was measured to be 18.90 dBm for Antenna-1 and 18.95 dBm for Antenna-2.

Antenna 1 + Antenna 2 = MIMO

$$(18.90 \text{ dBm} + 18.95 \text{ dBm}) = (77.62 \text{ mW} + 78.52 \text{ mW}) = 156.14 \text{ mW} = 21.94 \text{ dBm}$$

|                                         |                                                                                                                                                                                                                         |                              |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b>  |                              | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                                                                                                                                                          | EUT Type:<br>Portable Tablet | Page 27 of 108                  |

## 7.4 Power Spectral Density

§15.247(e); RSS-247 [5.2]

### Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

***The maximum permissible power spectral density is 8 dBm in any 3 kHz band.***

### Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD

KDB 558074 D01 v05r02 – Section 8.4 DTS Maximum Power Spectral Density level in the fundamental emission

ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique

KDB 662911 D01 v02r01 – Section E)2) Measure-and-Sum Technique

### Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 10kHz
4. VBW = 1MHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-3. Test Instrument & Measurement Setup**

### Test Notes


None

|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 28 of 108                  |

## SISO Antenna-1 Power Spectral Density Measurements


| Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured Power Spectral Density [dBm] | Maximum Permissible Power Density [dBm / 3kHz] | Margin [dB] | Pass / Fail |
|-----------------|-------------|-------------|------------------|---------------------------------------|------------------------------------------------|-------------|-------------|
| 2412            | 1           | b           | 1                | 0.93                                  | 8.00                                           | -7.07       | Pass        |
| 2437            | 6           | b           | 1                | 2.65                                  | 8.00                                           | -5.35       | Pass        |
| 2462            | 11          | b           | 1                | 2.79                                  | 8.00                                           | -5.21       | Pass        |
| 2412            | 1           | g           | 6                | 1.66                                  | 8.00                                           | -6.34       | Pass        |
| 2437            | 6           | g           | 6                | 1.25                                  | 8.00                                           | -6.75       | Pass        |
| 2462            | 11          | g           | 6                | 1.28                                  | 8.00                                           | -6.72       | Pass        |
| 2412            | 1           | n           | 6.5/7.2 (MCS0)   | -0.47                                 | 8.00                                           | -8.47       | Pass        |
| 2437            | 6           | n           | 6.5/7.2 (MCS0)   | 1.64                                  | 8.00                                           | -6.36       | Pass        |
| 2462            | 11          | n           | 6.5/7.2 (MCS0)   | -2.10                                 | 8.00                                           | -10.10      | Pass        |

**Table 7-8. Conducted Power Density Measurements SISO ANT1**

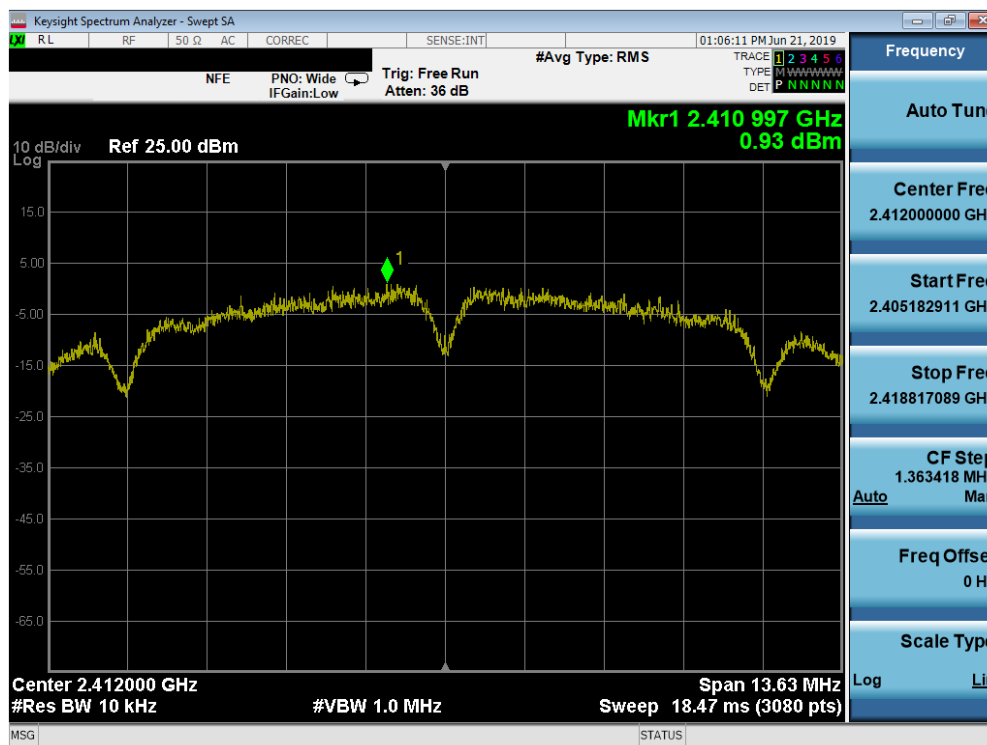


**Plot 7-19. Power Spectral Density Plot SISO ANT1 (802.11b – Ch. 1)**

|                                                |                                                                                                                                                                                                                         |                                     |                                        |
|------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|----------------------------------------|
| FCC ID: A3LSMT867V                             |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b>  |                                     | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1M1907090121-04.A3L | <b>Test Dates:</b><br>6/7 - 7/22/2019                                                                                                                                                                                   | <b>EUT Type:</b><br>Portable Tablet | Page 29 of 108                         |

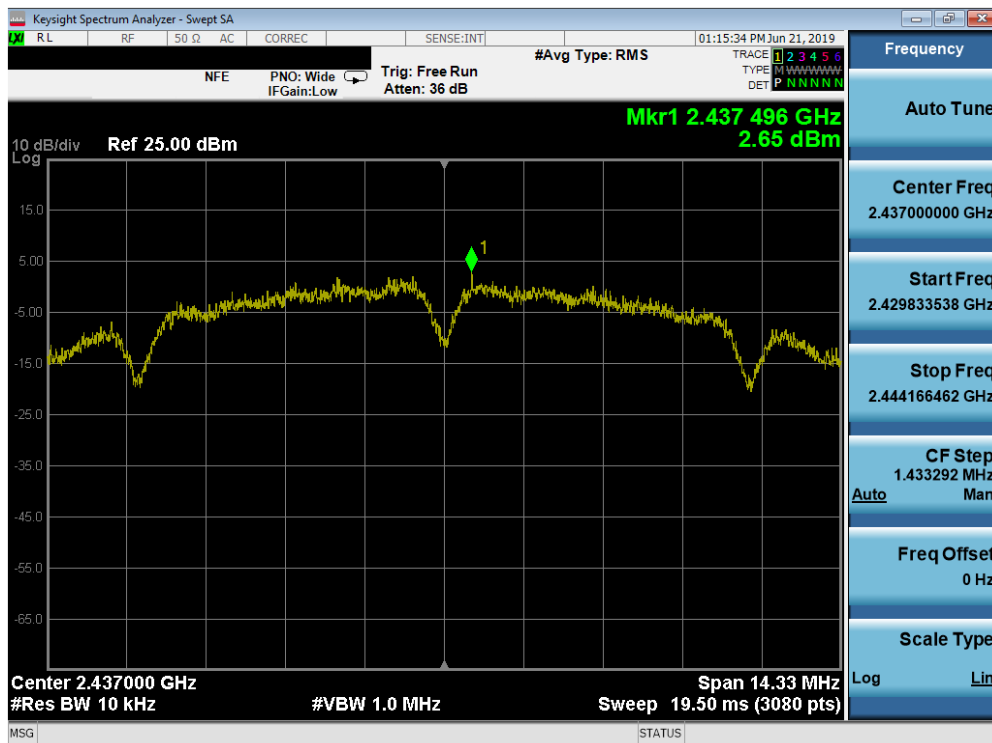


Plot 7-20. Power Spectral Density Plot SISO ANT1 (802.11b – Ch. 6)

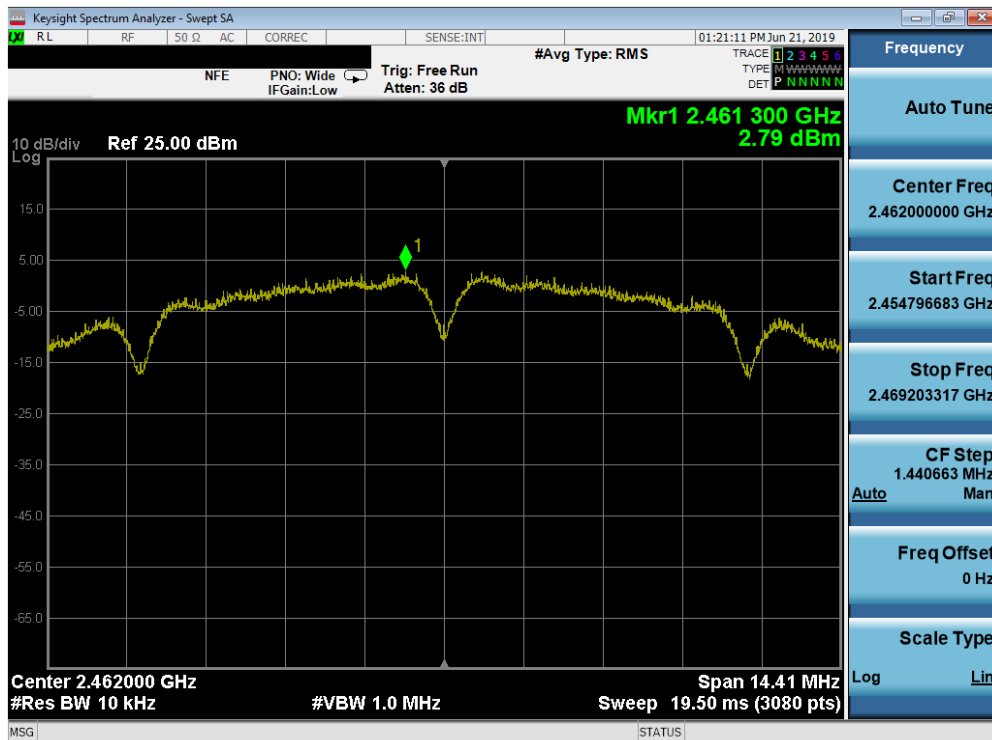


Plot 7-21. Power Spectral Density Plot SISO ANT1 (802.11b – Ch. 11)

|                                         |                                                                                                                                                                                                                         |                              |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b>  |                              | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                                                                                                                                                          | EUT Type:<br>Portable Tablet | Page 30 of 108                  |

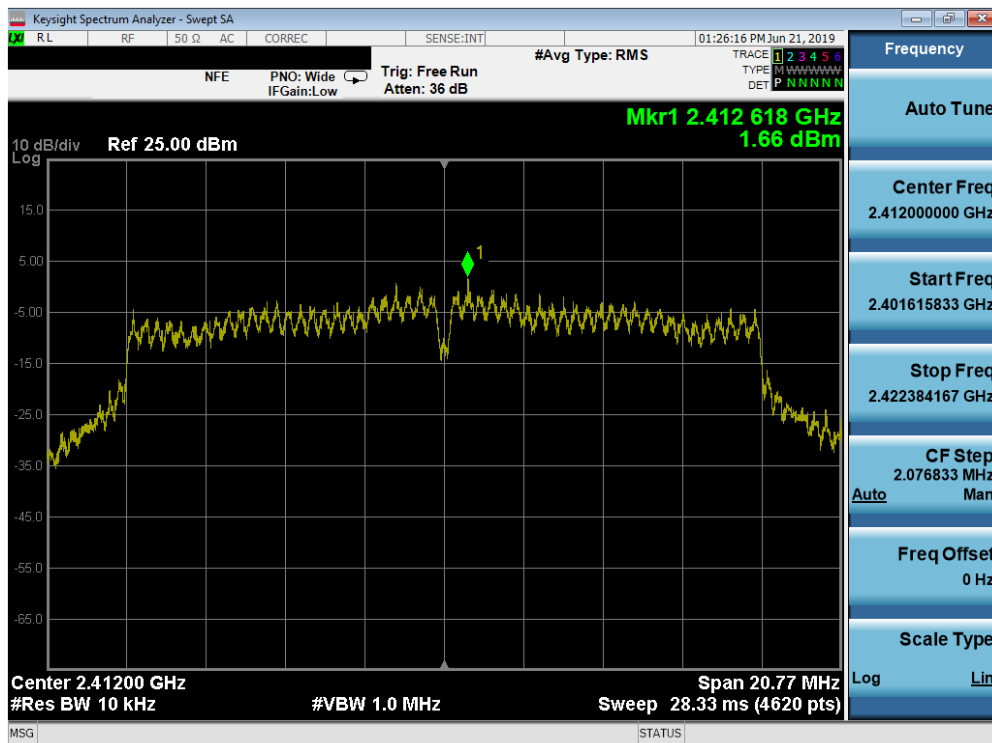


Plot 7-22. Power Spectral Density Plot SISO ANT1 (802.11g – Ch. 1)

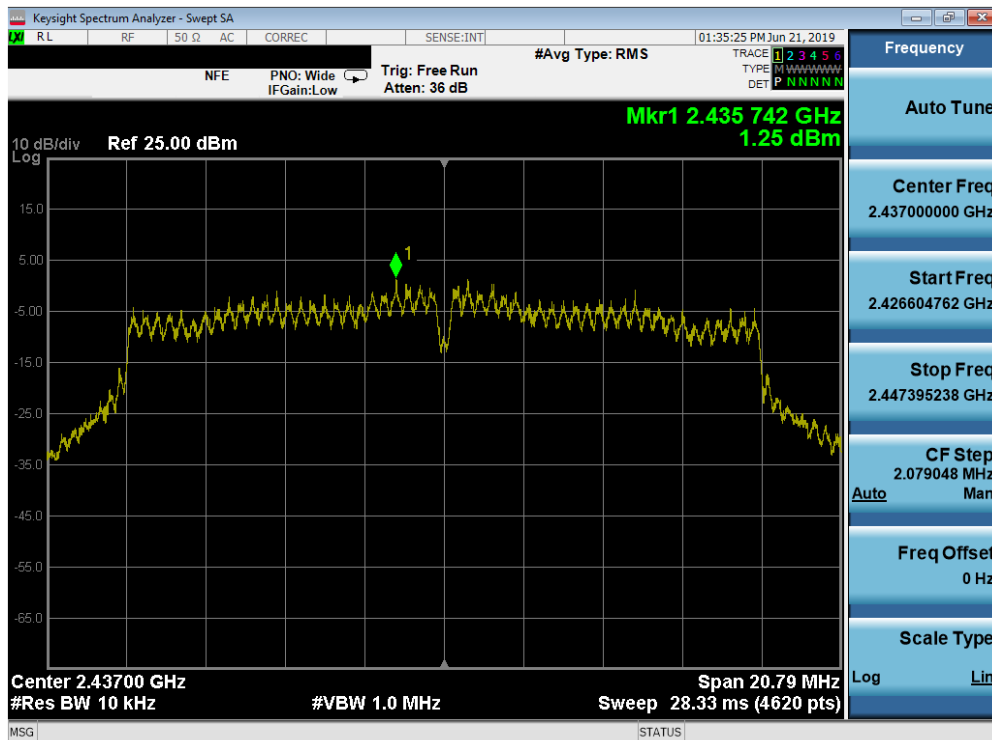


Plot 7-23. Power Spectral Density Plot SISO ANT1 (802.11g – Ch. 6)

|                                         |                                                                                                                                                                                                                         |                              |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b>  |                              | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                                                                                                                                                          | EUT Type:<br>Portable Tablet | Page 31 of 108                  |

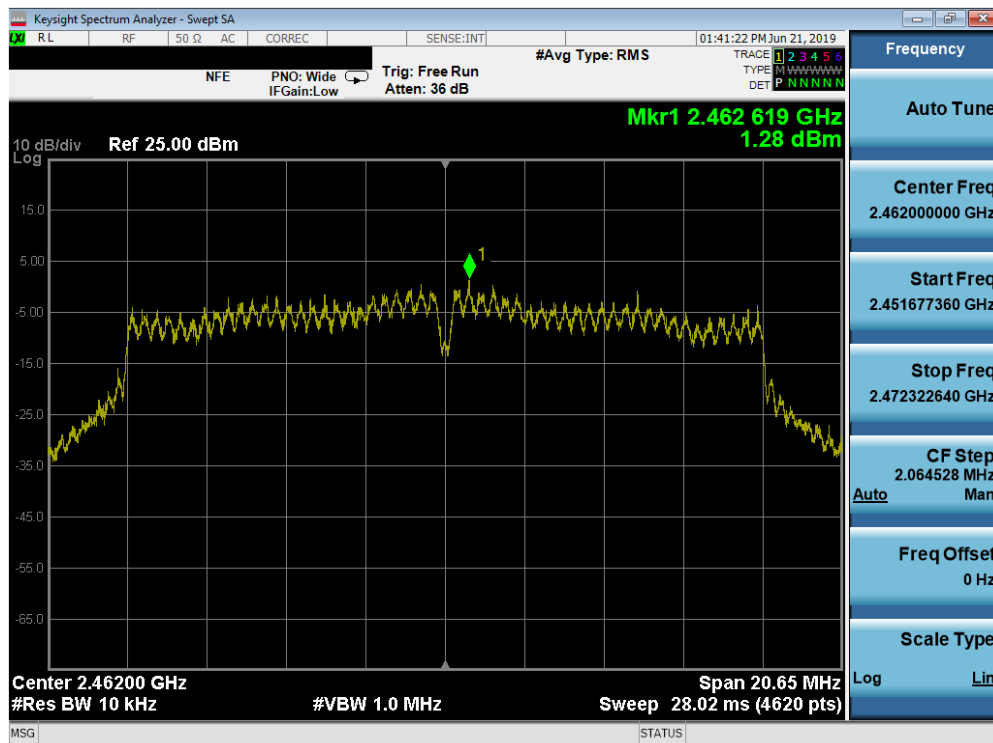


Plot 7-24. Power Spectral Density Plot SISO ANT1 (802.11g – Ch. 11)

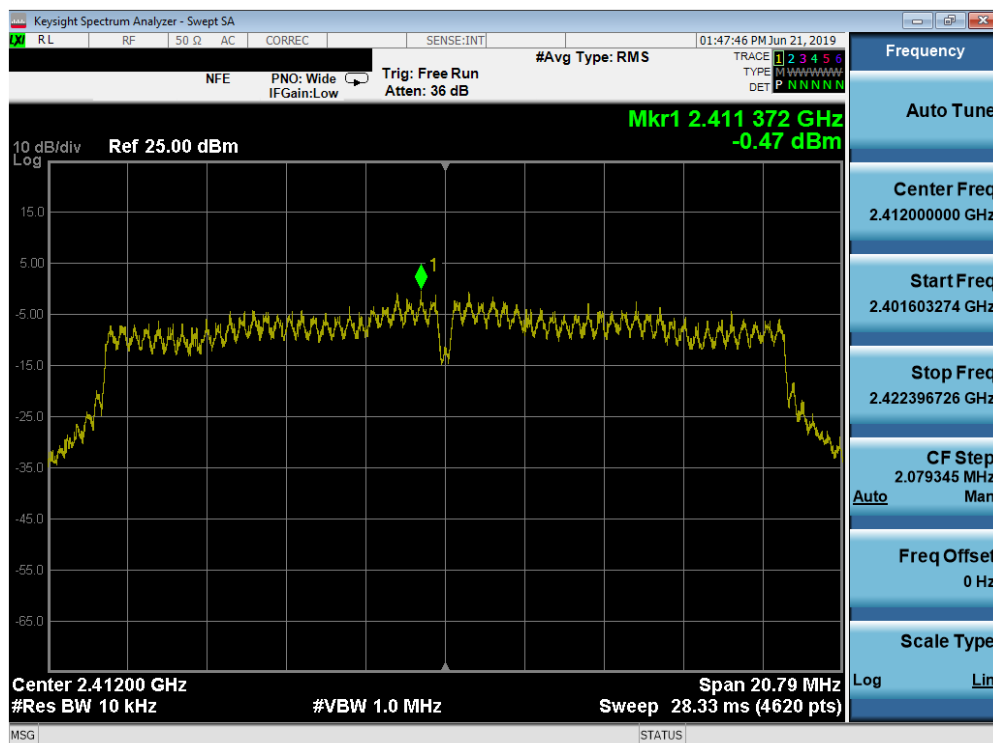


Plot 7-25. Power Spectral Density Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 1)

|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 32 of 108                  |

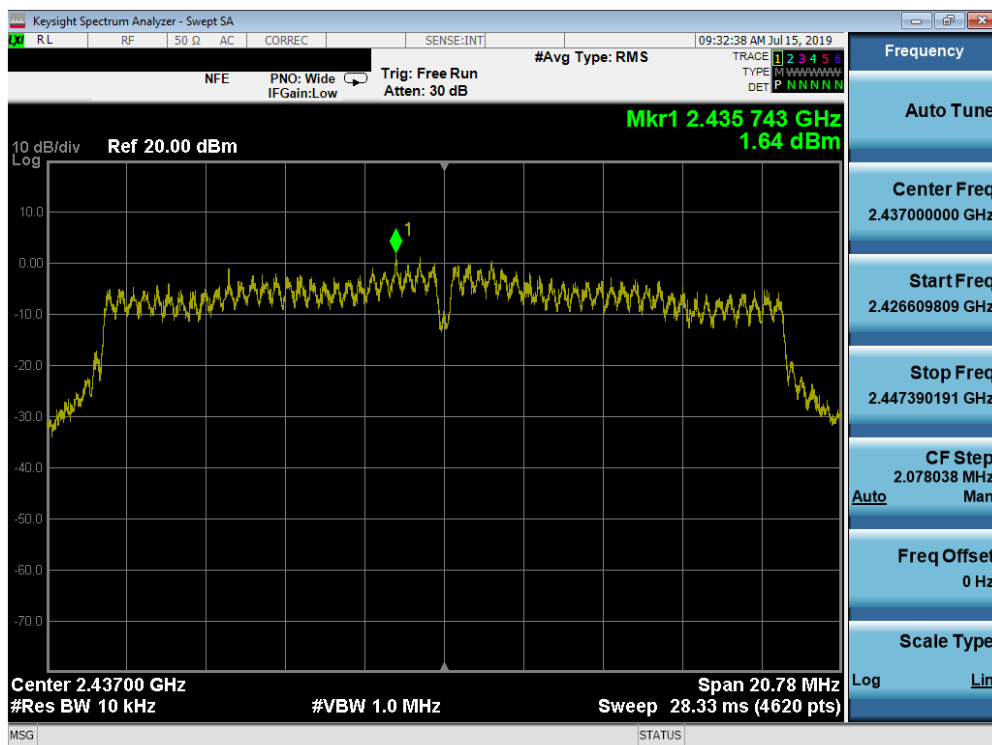

Plot 7-26. Power Spectral Density Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 6)

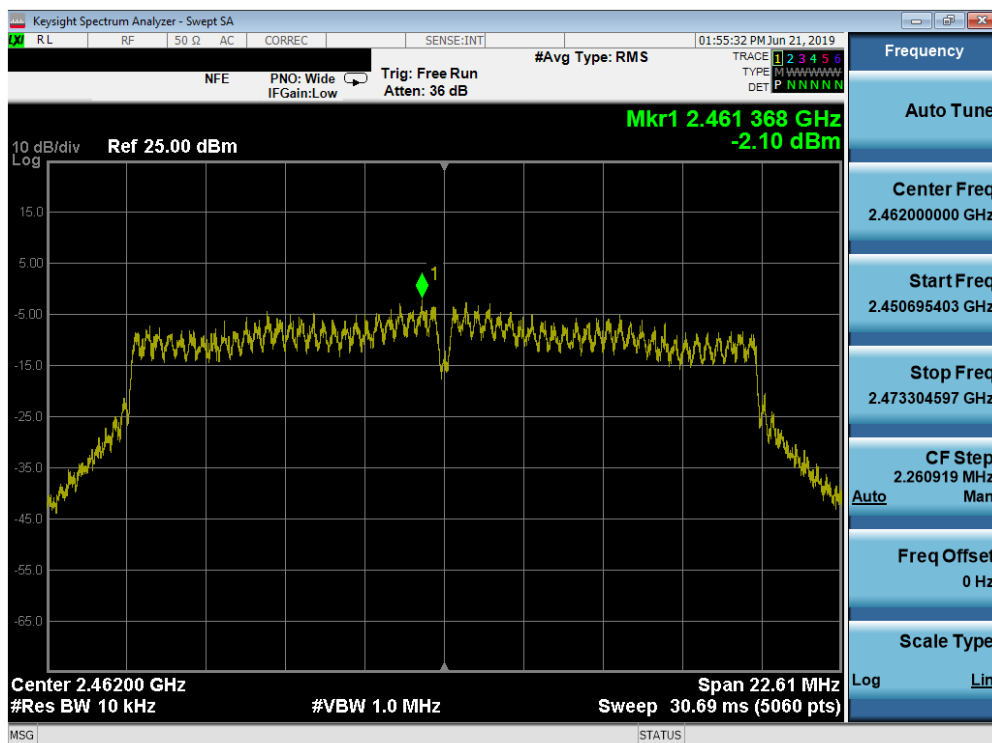


Plot 7-27. Power Spectral Density Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 11)

|                                         |                                              |                              |                |                                 |
|-----------------------------------------|----------------------------------------------|------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                              |                | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019               | EUT Type:<br>Portable Tablet | Page 33 of 108 |                                 |

## SISO Antenna-2 Power Spectral Density Measurements


| Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured Power Spectral Density [dBm] | Maximum Permissible Power Density [dBm / 3kHz] | Margin [dB] | Pass / Fail |
|-----------------|-------------|-------------|------------------|---------------------------------------|------------------------------------------------|-------------|-------------|
| 2412            | 1           | b           | 1                | 2.63                                  | 8.00                                           | -5.37       | Pass        |
| 2437            | 6           | b           | 1                | 3.13                                  | 8.00                                           | -4.87       | Pass        |
| 2462            | 11          | b           | 1                | 2.63                                  | 8.00                                           | -5.37       | Pass        |
| 2412            | 1           | g           | 6                | -0.42                                 | 8.00                                           | -8.42       | Pass        |
| 2437            | 6           | g           | 6                | 0.75                                  | 8.00                                           | -7.25       | Pass        |
| 2462            | 11          | g           | 6                | -0.44                                 | 8.00                                           | -8.44       | Pass        |
| 2412            | 1           | n           | 6.5/7.2 (MCS0)   | -1.84                                 | 8.00                                           | -9.84       | Pass        |
| 2437            | 6           | n           | 6.5/7.2 (MCS0)   | -3.23                                 | 8.00                                           | -11.23      | Pass        |
| 2462            | 11          | n           | 6.5/7.2 (MCS0)   | -1.63                                 | 8.00                                           | -9.63       | Pass        |

Table 7-9. Conducted Power Density Measurements SISO ANT2

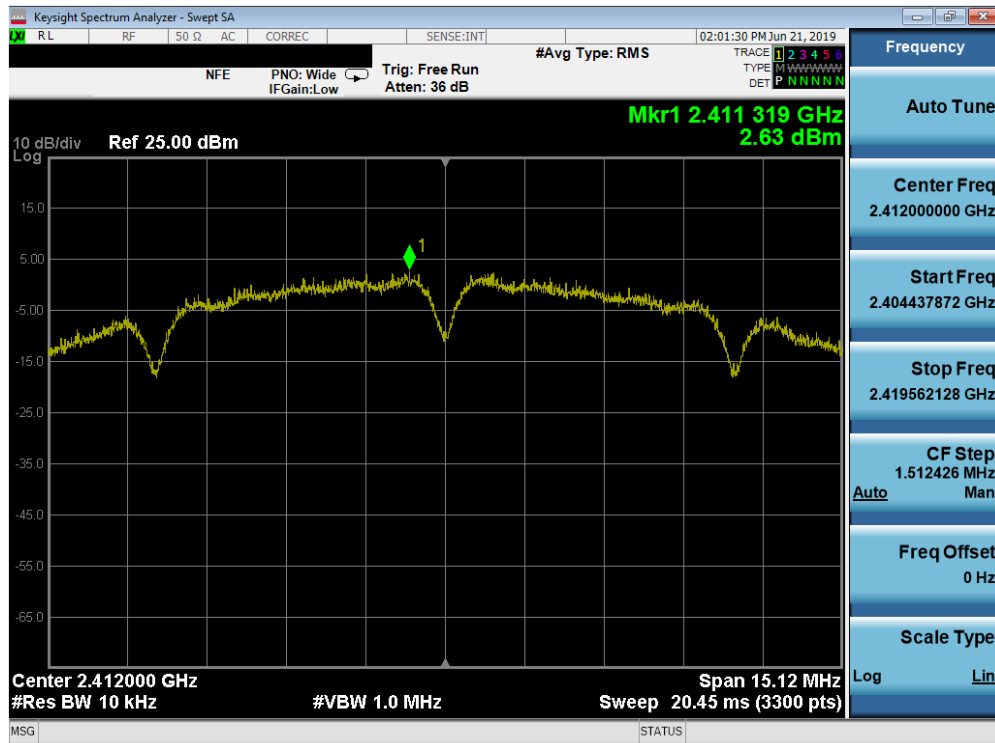


Plot 7-28. Power Spectral Density Plot SISO ANT2 (802.11b - Ch. 1)

|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04-A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 34 of 108                  |

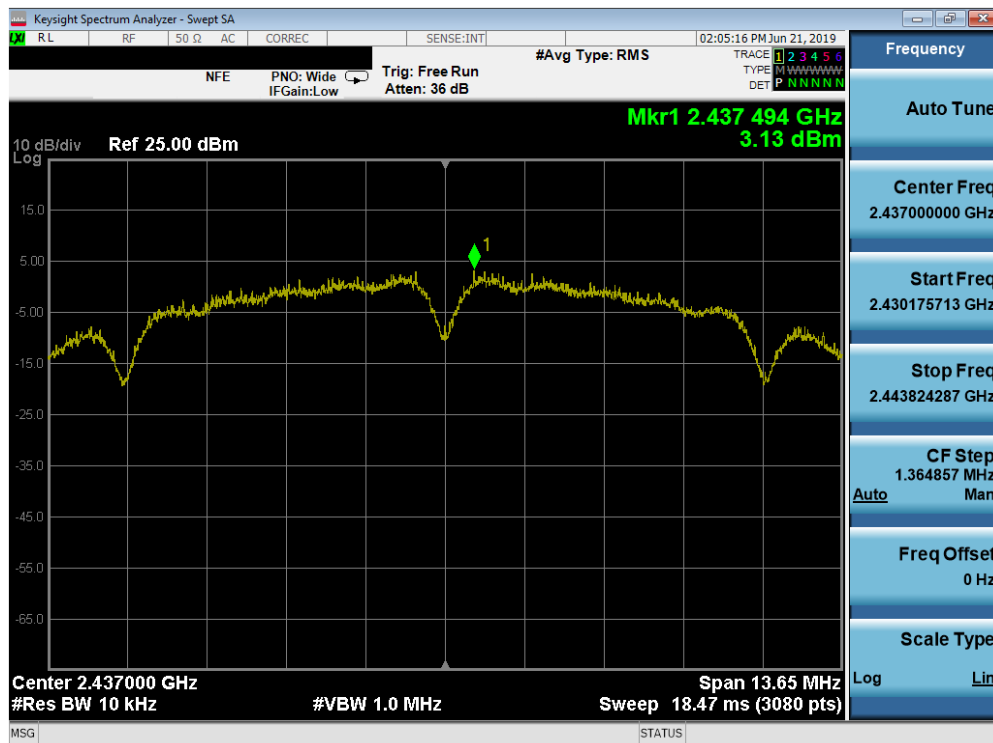


Plot 7-29. Power Spectral Density Plot SISO ANT2 (802.11b – Ch. 6)

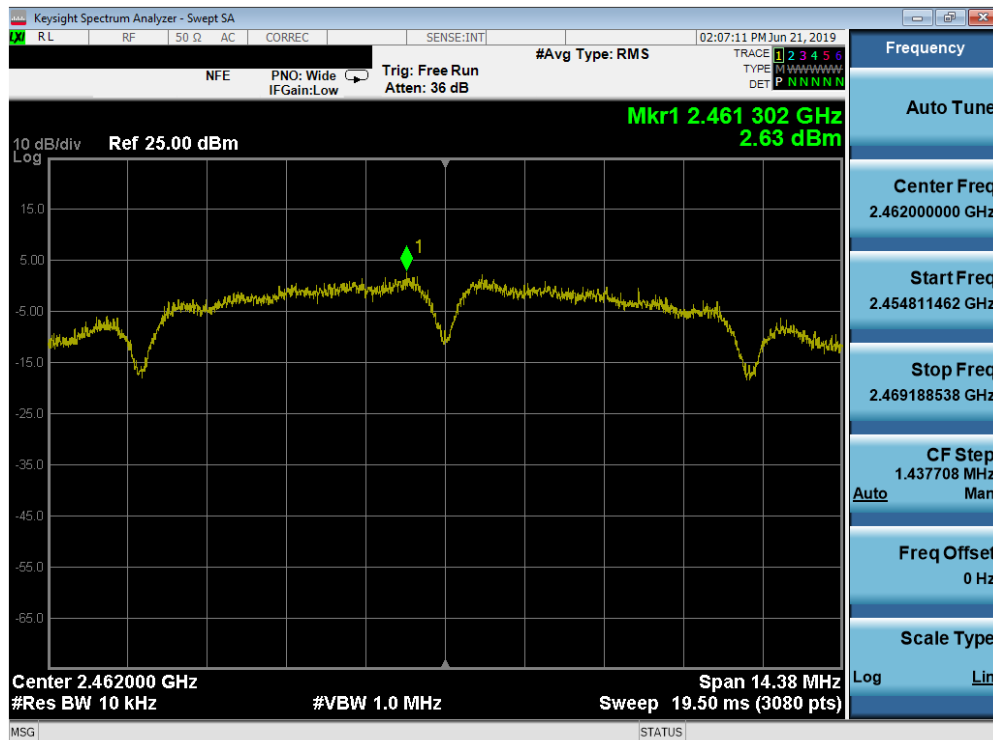


Plot 7-30. Power Spectral Density Plot SISO ANT2 (802.11b – Ch. 11)

|                                         |                                                                                                                                                                                                                         |                              |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b>  |                              | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                                                                                                                                                          | EUT Type:<br>Portable Tablet | Page 35 of 108                  |

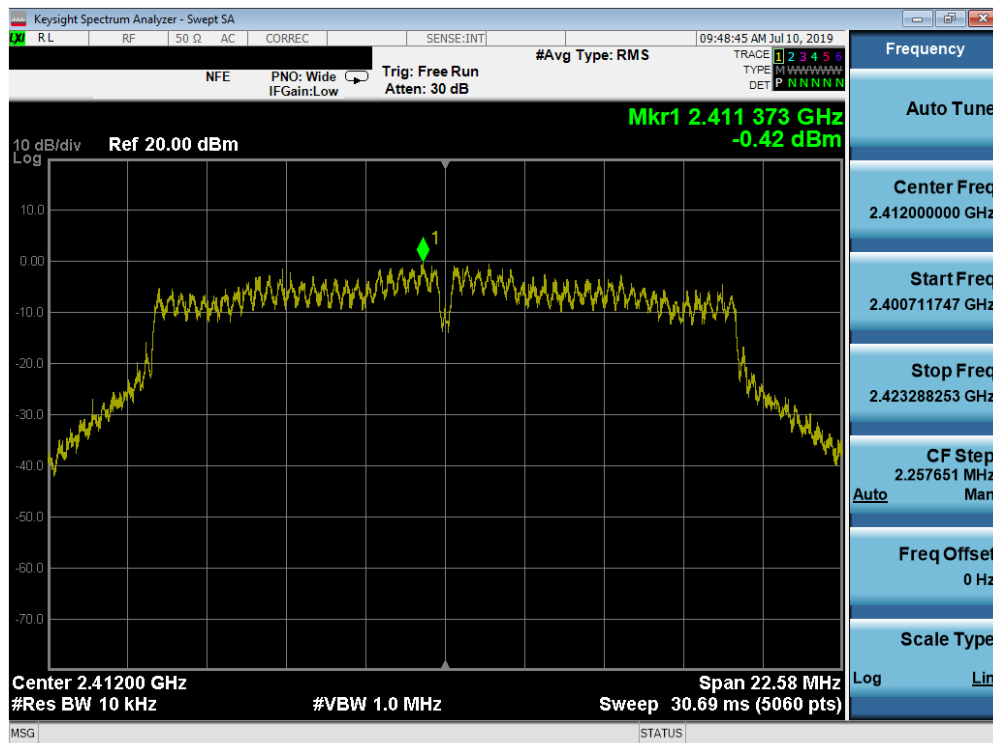


Plot 7-31. Power Spectral Density Plot SISO ANT2 (802.11g – Ch. 1)

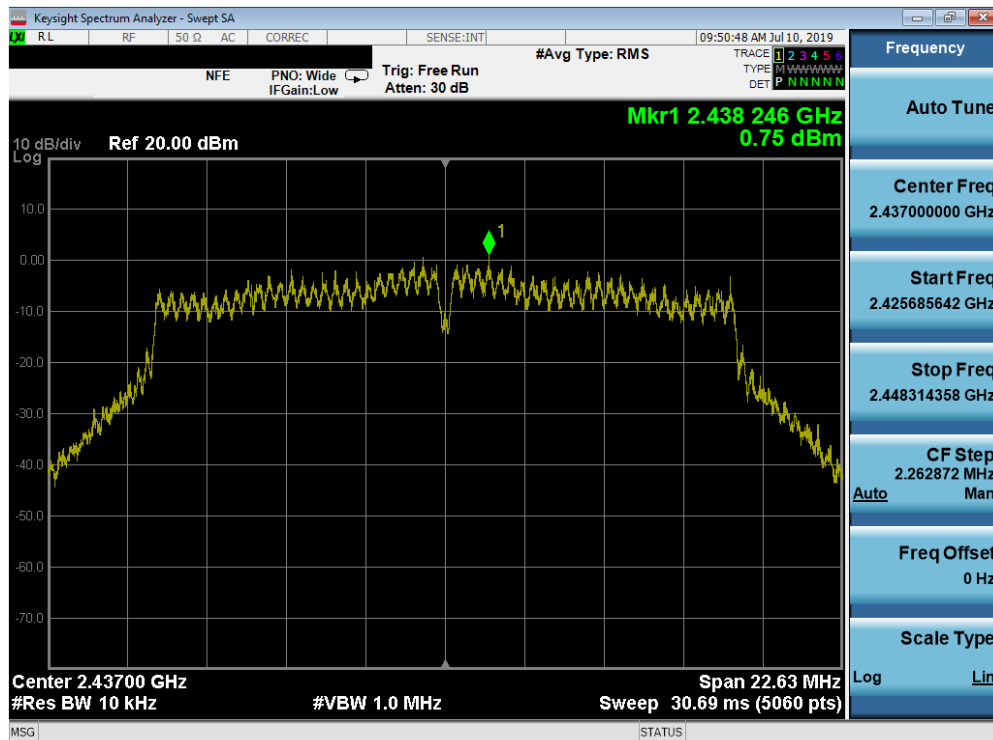


Plot 7-32. Power Spectral Density Plot SISO ANT2 (802.11g – Ch. 6)

|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 36 of 108                  |

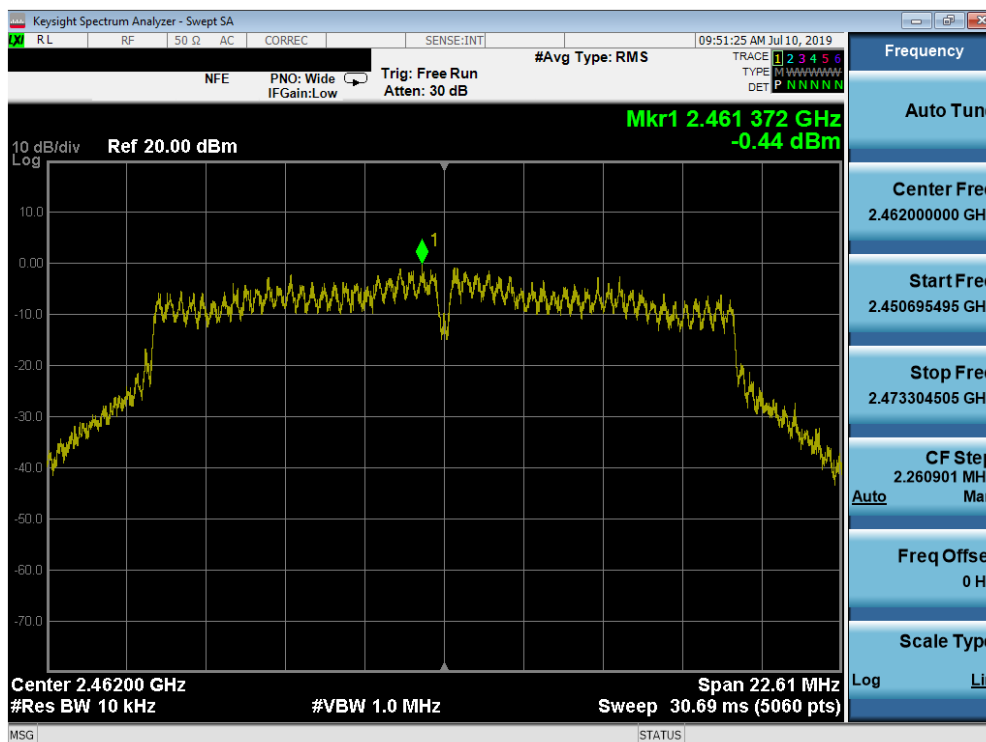


Plot 7-33. Power Spectral Density Plot SISO ANT2 (802.11g – Ch. 11)

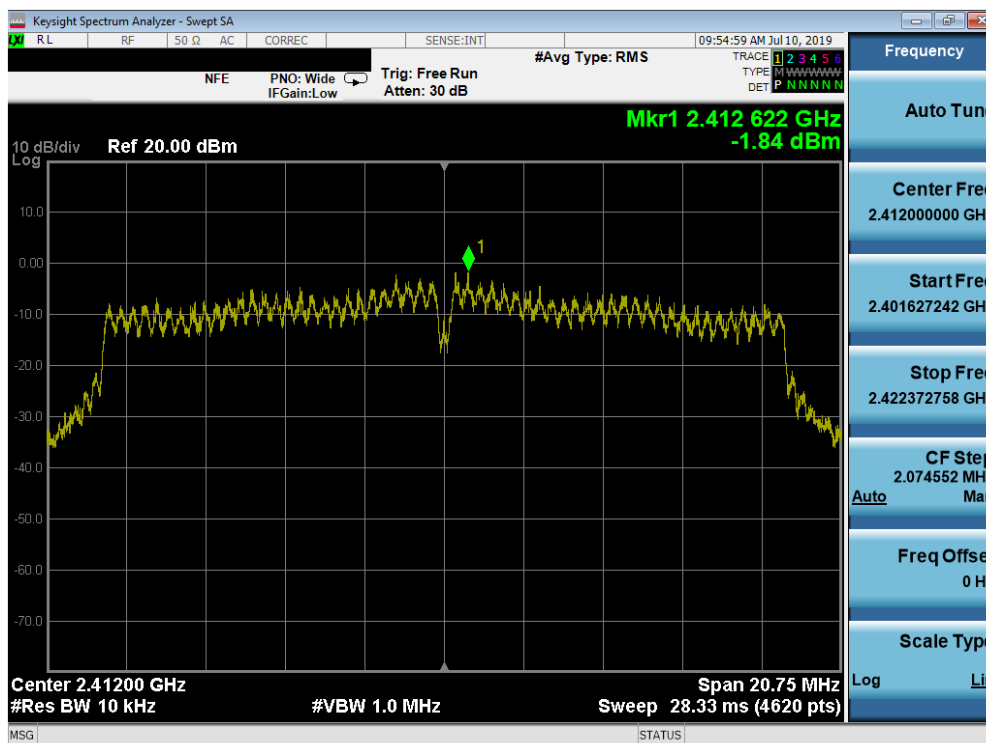


Plot 7-34. Power Spectral Density Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 1)

|                                         |                                              |                              |  |                                 |
|-----------------------------------------|----------------------------------------------|------------------------------|--|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                              |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019               | EUT Type:<br>Portable Tablet |  | Page 37 of 108                  |

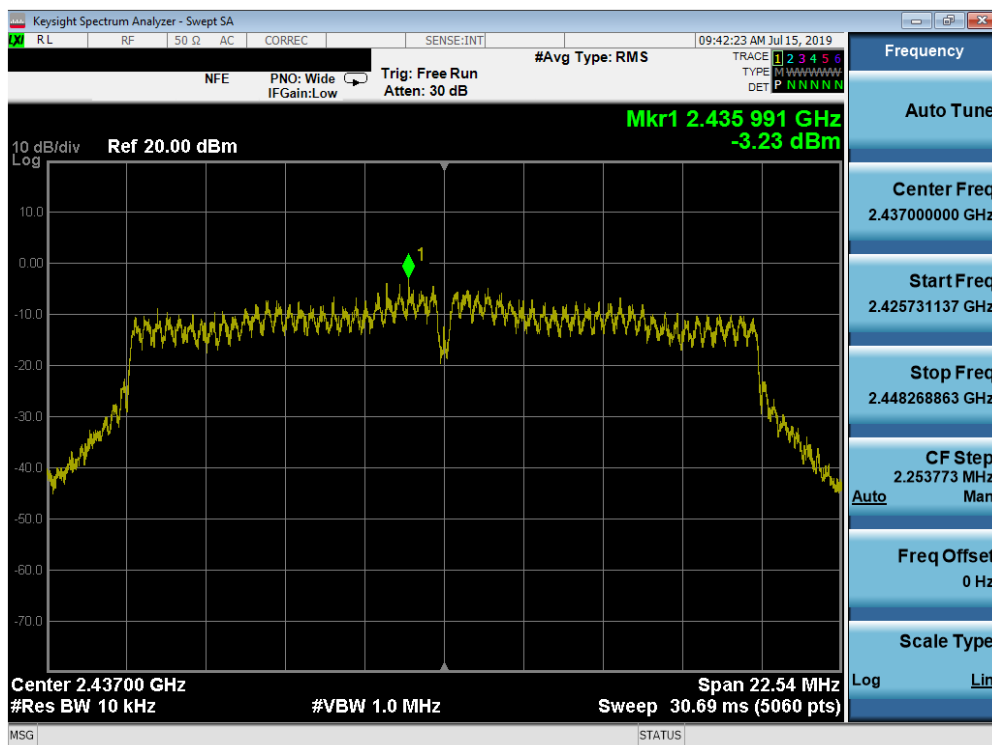

Plot 7-35. Power Spectral Density Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 6)

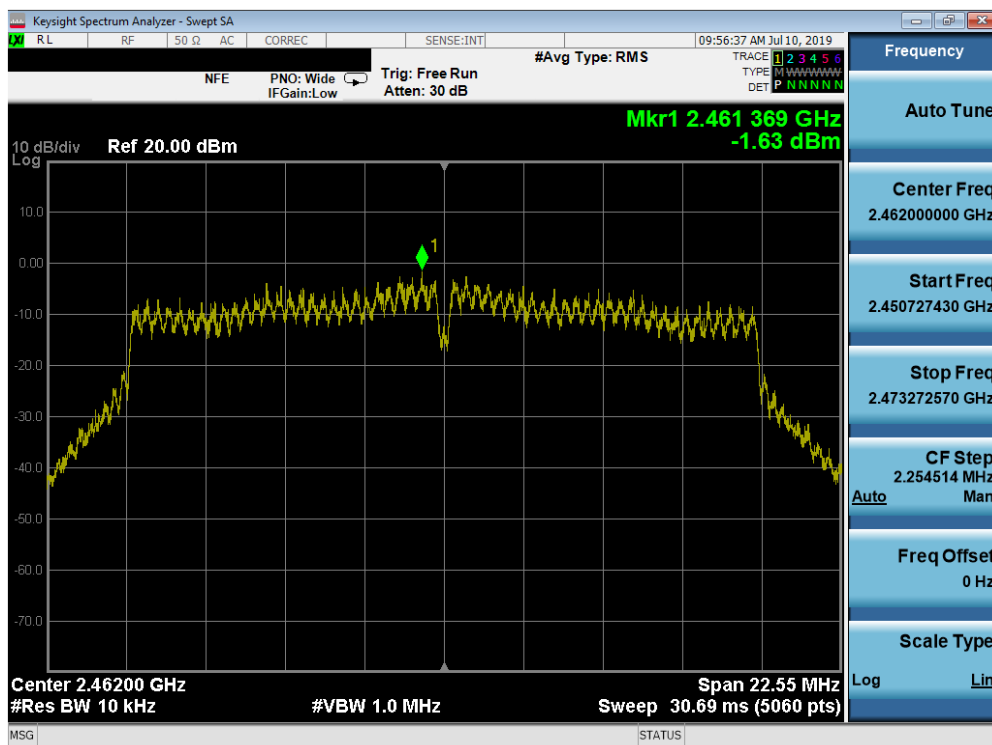

Plot 7-36. Power Spectral Density Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 11)

|                                         |                                              |                              |  |                                 |
|-----------------------------------------|----------------------------------------------|------------------------------|--|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                              |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019               | EUT Type:<br>Portable Tablet |  | Page 38 of 108                  |

## MIMO Power Spectral Density Measurements

| Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | ANT 1 Power Spectral Density [dBm] | ANT 2 Power Spectral Density [dBm] | Summed MIMO Power Spectral Density [dBm] | Maximum Permissible Power Density [dBm / 3kHz] | Margin [dB] | Pass / Fail |
|-----------------|-------------|-------------|------------------|------------------------------------|------------------------------------|------------------------------------------|------------------------------------------------|-------------|-------------|
| 2412            | 1           | g           | 6                | 1.66                               | -0.42                              | 3.75                                     | 8.00                                           | -4.25       | Pass        |
| 2437            | 6           | g           | 6                | 1.25                               | 0.75                               | 4.01                                     | 8.00                                           | -3.99       | Pass        |
| 2462            | 11          | g           | 6                | 1.28                               | -0.44                              | 3.52                                     | 8.00                                           | -4.48       | Pass        |
| 2412            | 1           | n           | 6.5/7.2 (MCS0)   | -0.47                              | -1.84                              | 1.91                                     | 8.00                                           | -6.09       | Pass        |
| 2437            | 6           | n           | 6.5/7.2 (MCS0)   | 1.64                               | -3.23                              | 2.87                                     | 8.00                                           | -5.13       | Pass        |
| 2462            | 11          | n           | 6.5/7.2 (MCS0)   | -2.10                              | -1.63                              | 1.15                                     | 8.00                                           | -6.85       | Pass        |

**Table 7-10.MIMO Conducted Power Density Measurements**

### Note:

Per ANSI C63.10-2013 Section 14.3.2.2 and KDB 662911 D01 v02r01 Section E2), the power spectral density at Antenna 1 and Antenna 2 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

### Sample MIMO Calculation:

At 2412MHz the average conducted power spectral density was measured to be -0.47 dBm for Antenna-1 and -1.84 dBm for Antenna-2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(-0.47 \text{ dBm} + -1.84 \text{ dBm}) = (0.90 \text{ mW} + 0.65 \text{ mW}) = 1.55 \text{ mW} = 1.91 \text{ dBm}$$

|                                         |                                                                                     |                                       |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  | MEASUREMENT REPORT<br>(CERTIFICATION) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                      | EUT Type:<br>Portable Tablet          |                                                                                       | Page 39 of 108                  |

## 7.5 Conducted Emissions at the Band Edge

§15.247(d); RSS-247 [5.5]

### Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. For the following out of band conducted spurious emissions plots at the band edge, the EUT was set at a data rate of 1Mbps for “b” mode, 6 Mbps for “g” mode, 6.5/7.2Mbps for “n” mode, and 8.6Mbps for “ax” mode as these settings produced the worst-case emissions.

***The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 7.4).***

### Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3  
KDB 558074 D01 v05r02 – Section 8.7.2

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 1MHz
5. Detector = Peak
6. Number of sweep points  $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 7-4. Test Instrument & Measurement Setup**

### Test Notes


None

|                                         |                                                                                                                                                                                                                         |                              |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b>  |                              | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                                                                                                                                                          | EUT Type:<br>Portable Tablet | Page 40 of 108                  |

## SISO Antenna-1 Conducted Emissions at the Band Edge

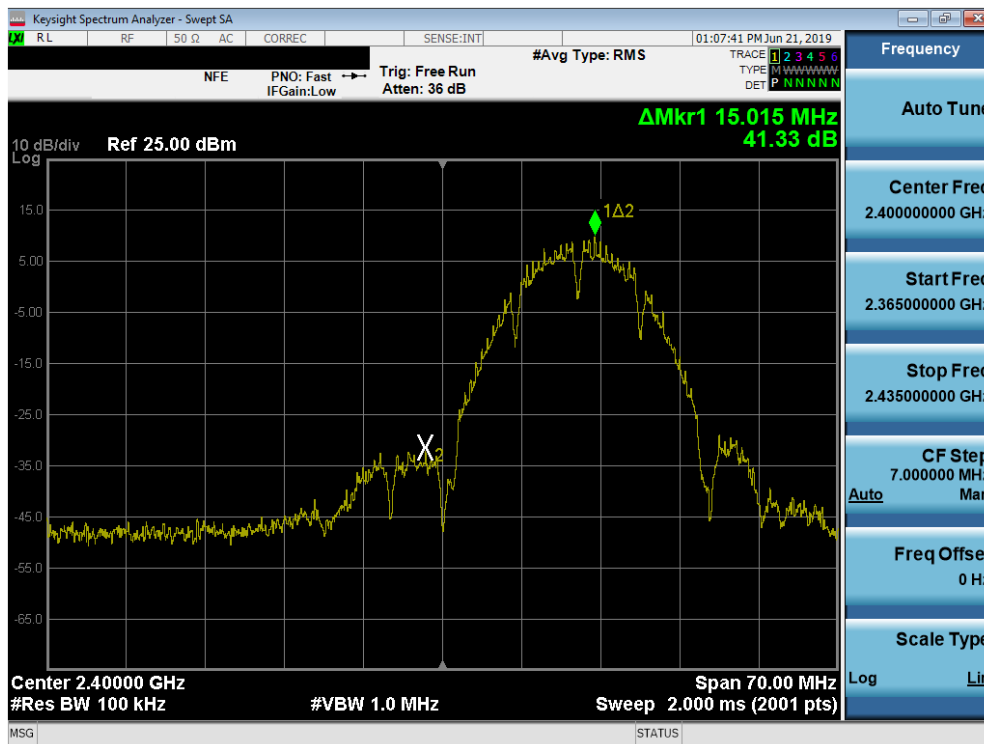


Plot 7-37. Band Edge Plot SISO ANT1 (802.11b – Ch. 1)

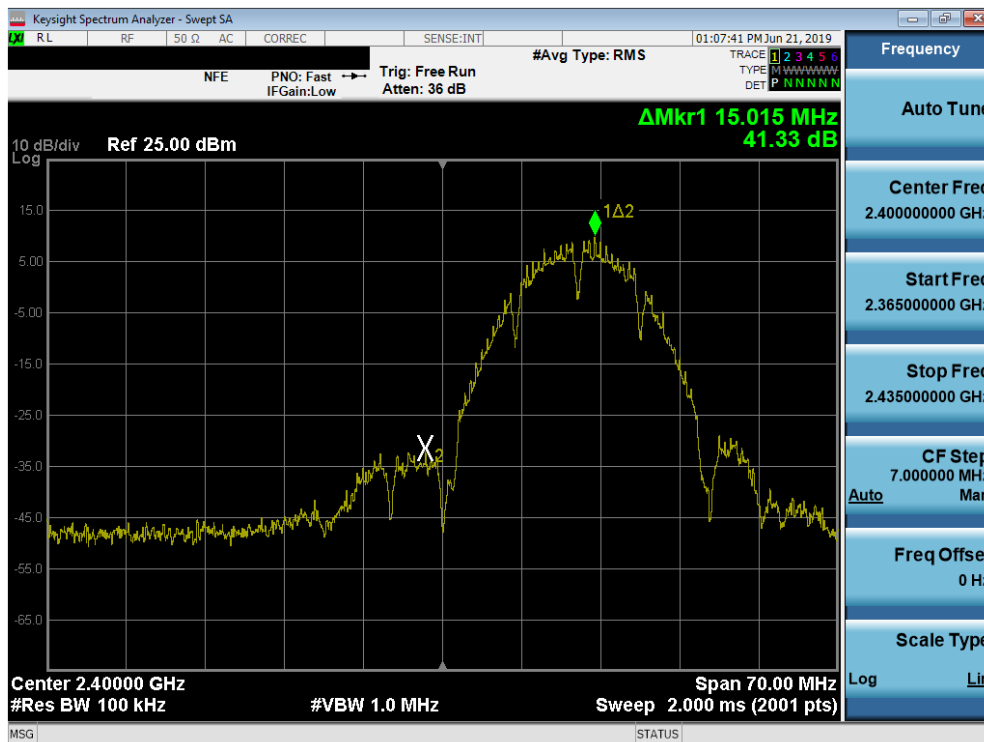


Plot 7-38. Band Edge Plot SISO ANT1 (802.11b – Ch. 2)

|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 41 of 108                  |

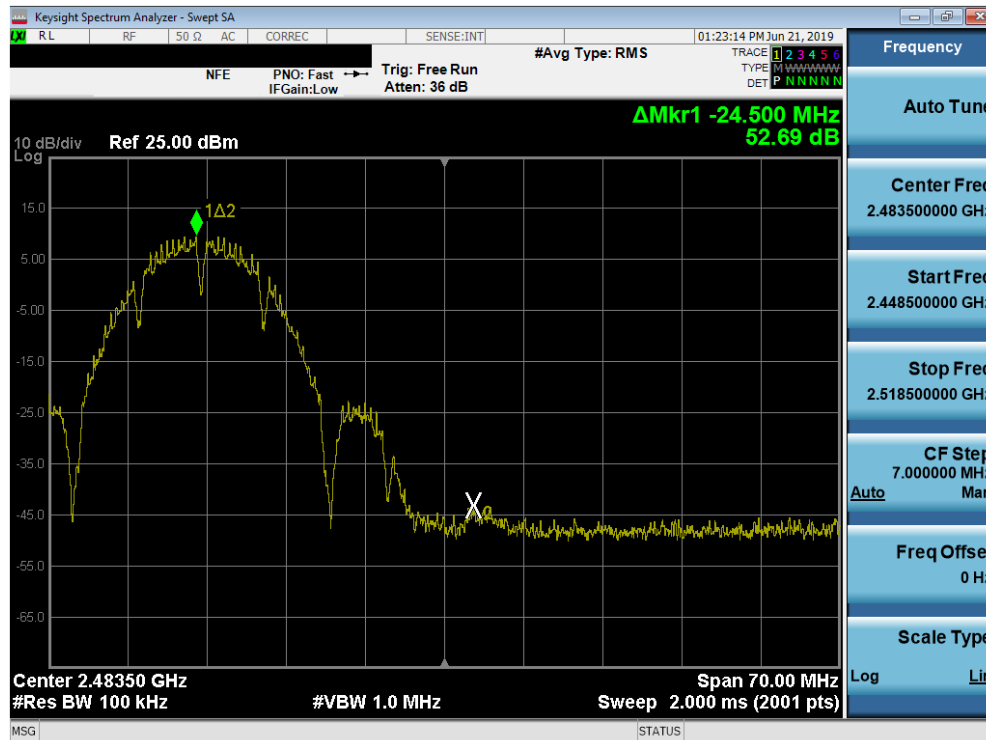


Plot 7-39. Band Edge Plot SISO ANT1 (802.11b - Ch. 11)

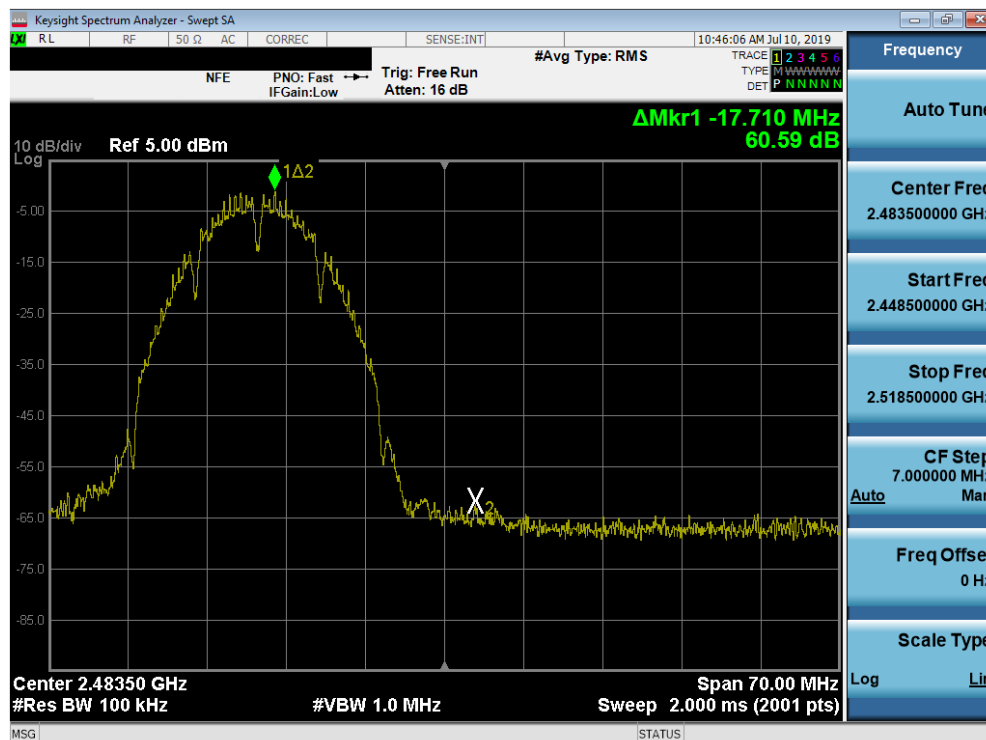


Plot 7-40. Band Edge Plot SISO ANT1 (802.11b - Ch. 12)

|                                         |                                              |                              |  |                                 |
|-----------------------------------------|----------------------------------------------|------------------------------|--|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                              |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019               | EUT Type:<br>Portable Tablet |  | Page 42 of 108                  |

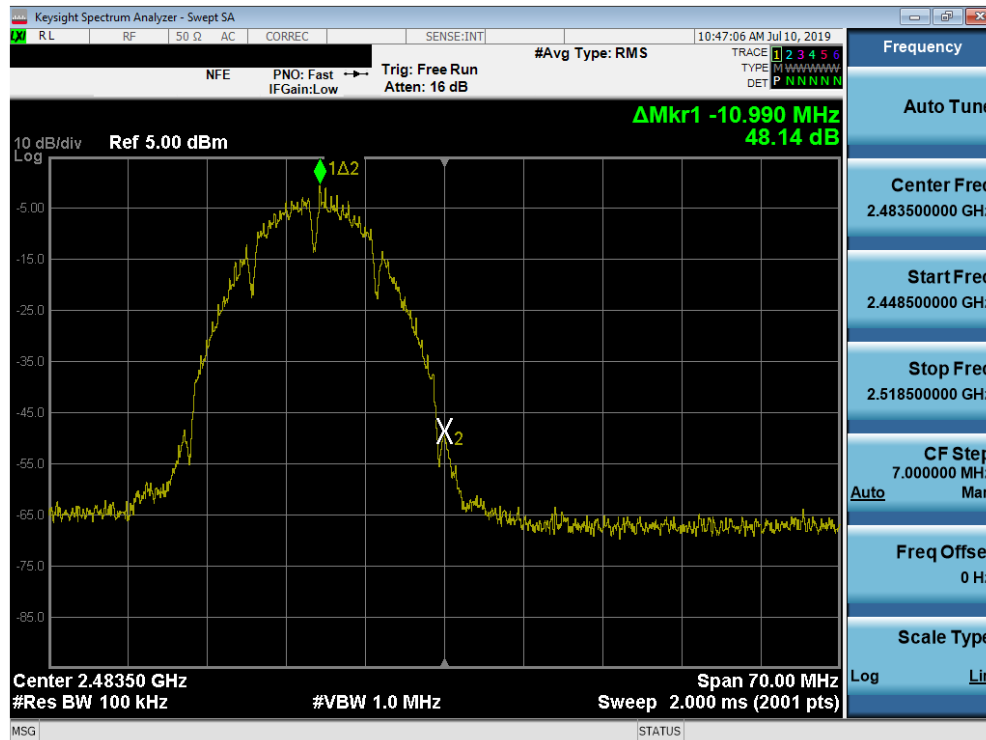


Plot 7-41. Band Edge Plot SISO ANT1 (802.11b – Ch. 13)

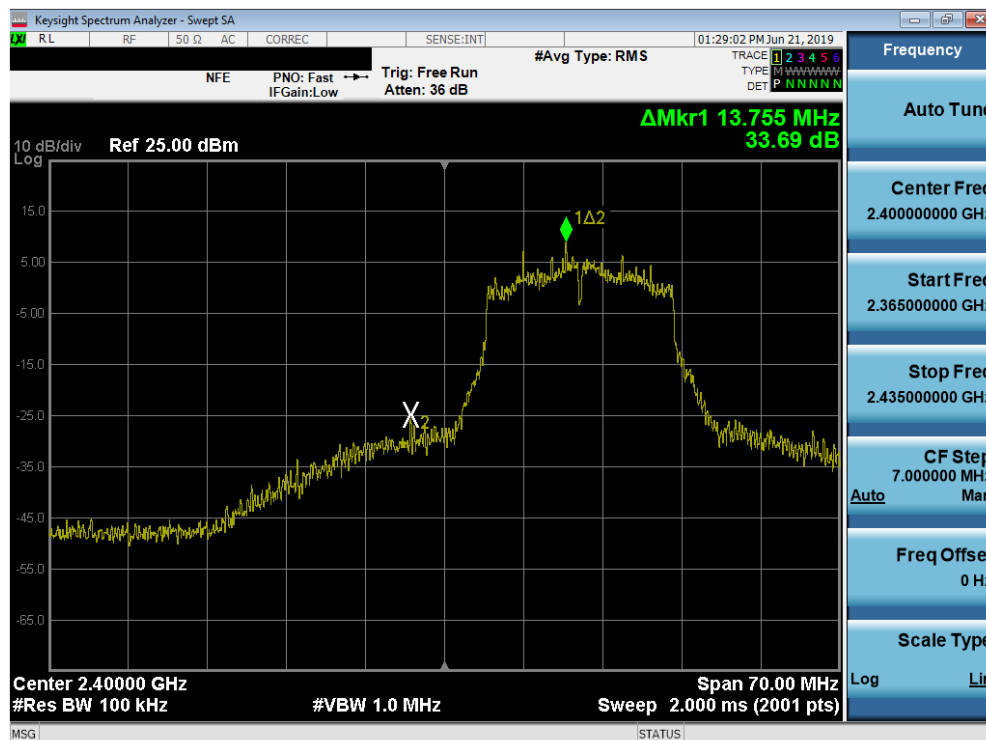


Plot 7-42. Band Edge Plot SISO ANT1 (802.11g- Ch. 1)

|                                         |                                              |                              |  |                                 |
|-----------------------------------------|----------------------------------------------|------------------------------|--|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                              |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019               | EUT Type:<br>Portable Tablet |  | Page 43 of 108                  |

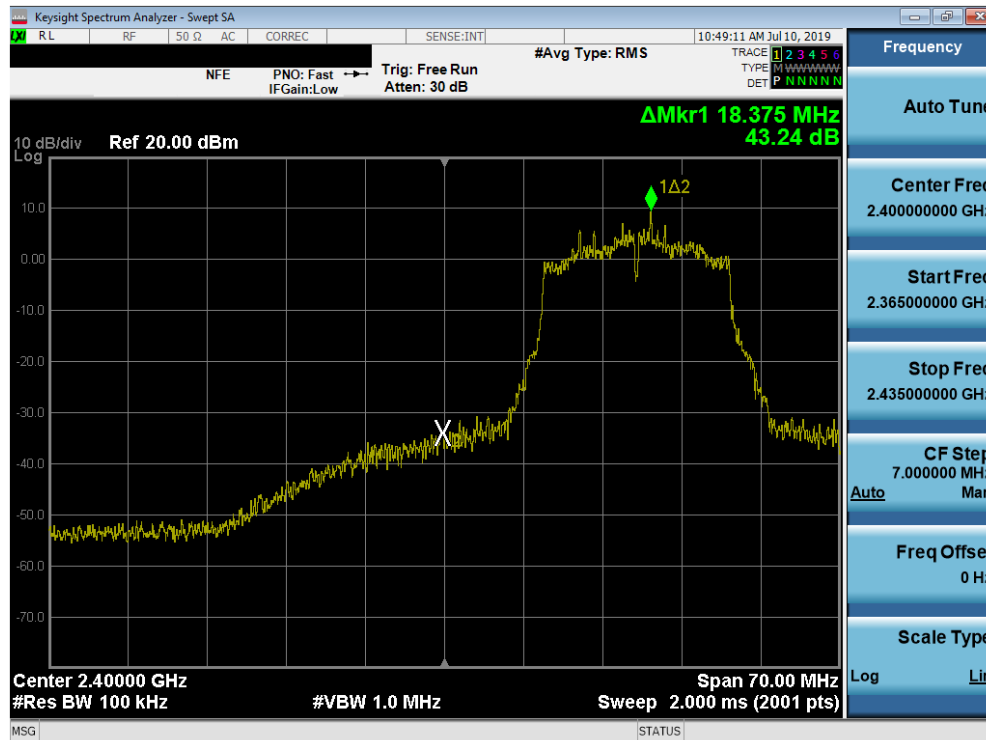


Plot 7-43. Band Edge Plot SISO ANT1 (802.11g- Ch. 2)

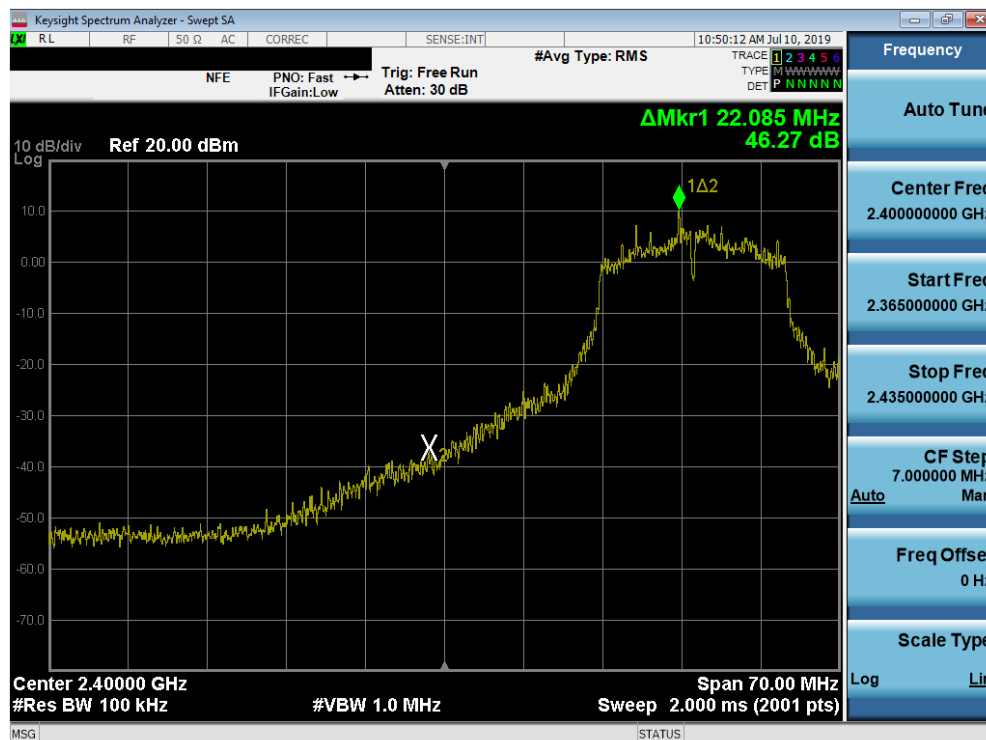


Plot 7-44. Band Edge Plot SISO ANT1 (802.11g- Ch. 3)

|                                         |                                              |                              |  |                                 |
|-----------------------------------------|----------------------------------------------|------------------------------|--|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                              |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019               | EUT Type:<br>Portable Tablet |  | Page 44 of 108                  |

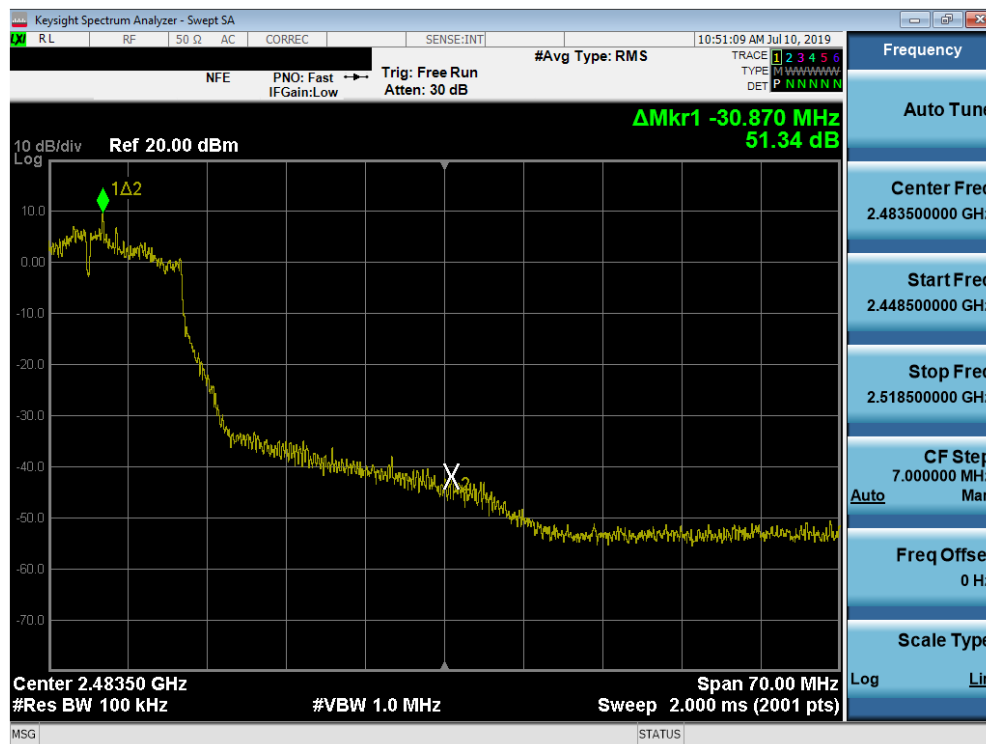


#### Plot 7-45. Band Edge Plot SISO ANT1 (802.11g – Ch. 9)

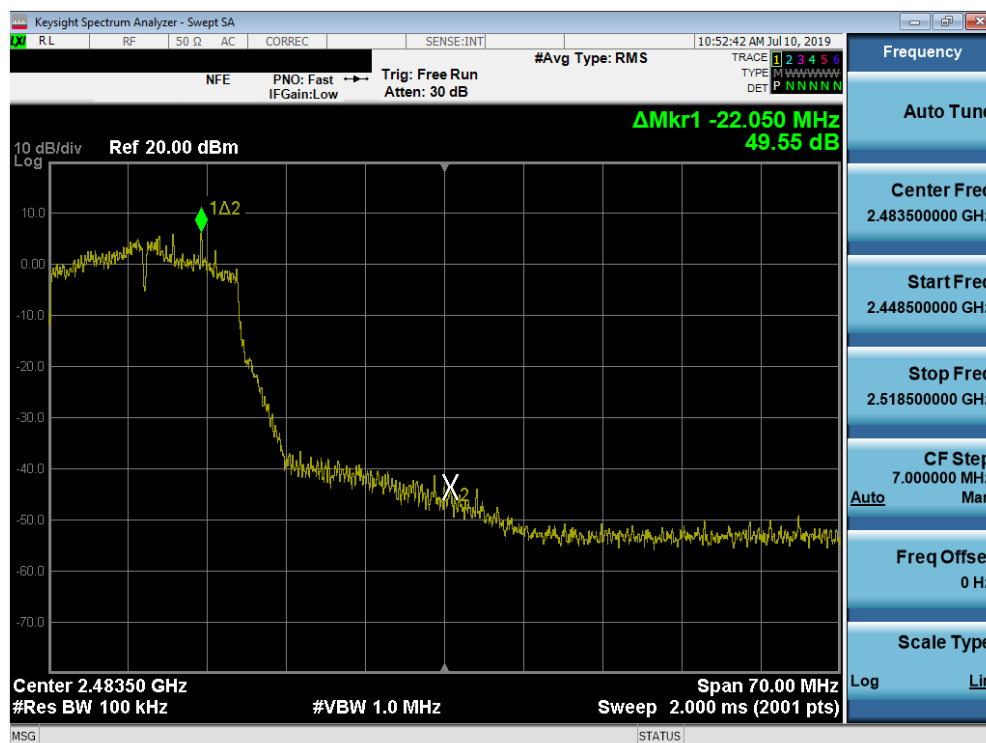


### Plot 7-46. Band Edge Plot SISO ANT1 (802.11g – Ch. 10)

|                                                |                                                                                                                                                                                                                         |                                     |                                        |
|------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|----------------------------------------|
| FCC ID: A3LSMT867V                             |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b>  |                                     | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1M1907090121-04.A3L | <b>Test Dates:</b><br>6/7 - 7/22/2019                                                                                                                                                                                   | <b>EUT Type:</b><br>Portable Tablet | Page 45 of 108                         |

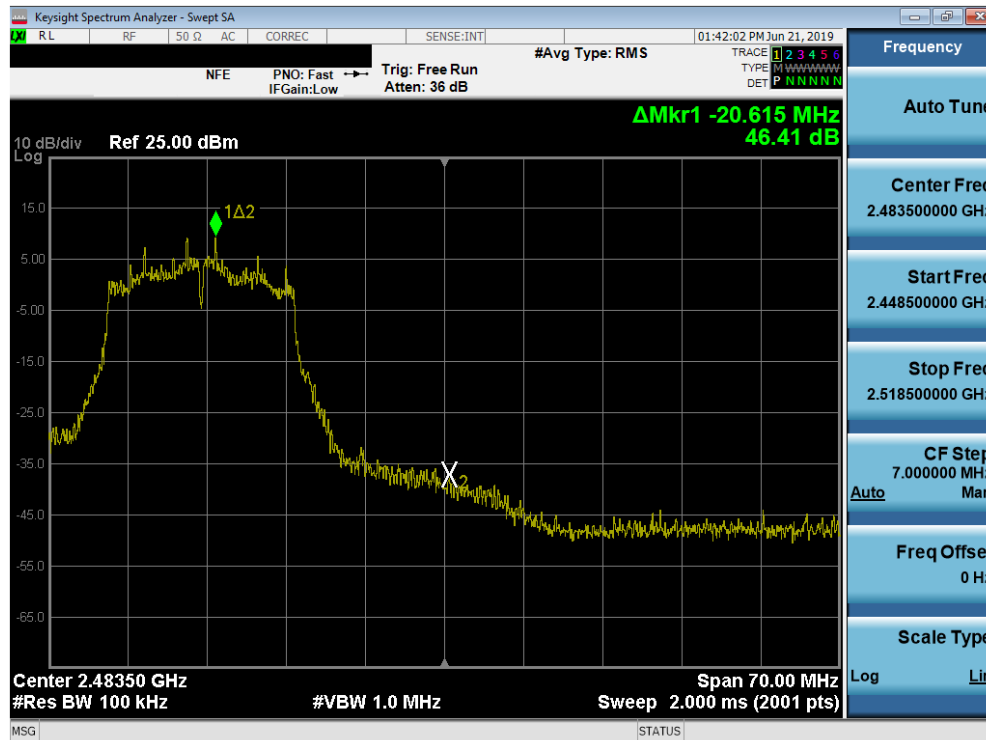

Plot 7-47. Band Edge Plot SISO ANT1 (802.11g – Ch. 11)

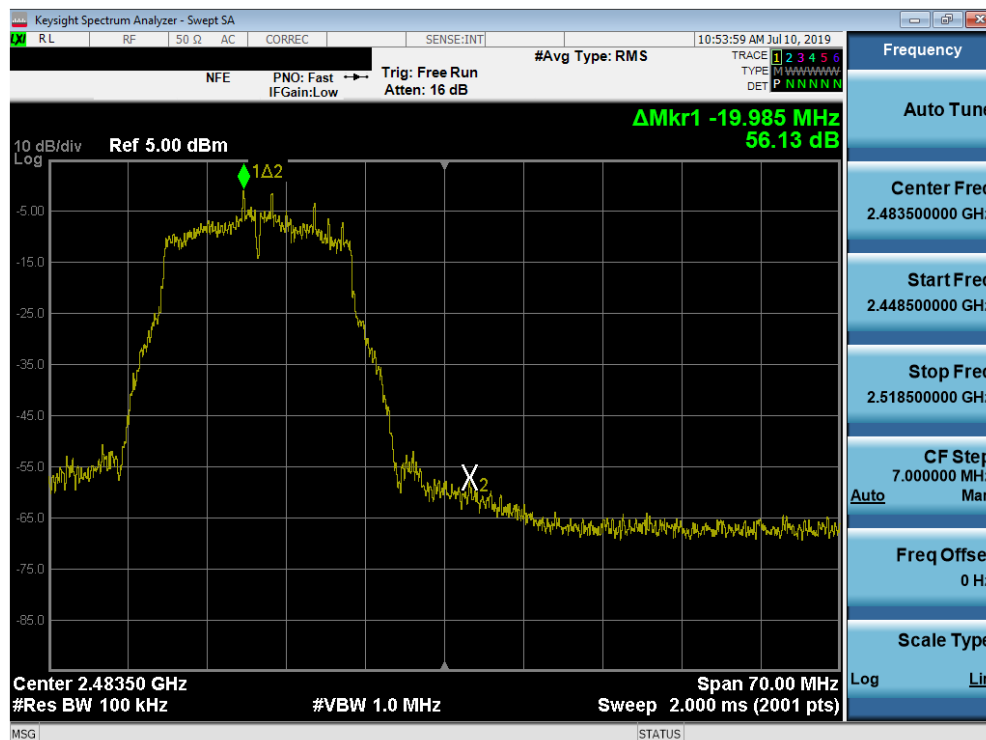


Plot 7-48. Band Edge Plot SISO ANT1 (802.11g – Ch. 12)

|                                         |                                              |                              |                |                                 |
|-----------------------------------------|----------------------------------------------|------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                              |                | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019               | EUT Type:<br>Portable Tablet | Page 46 of 108 |                                 |




Plot 7-49. Band Edge Plot SISO ANT1 (802.11g – Ch. 13)

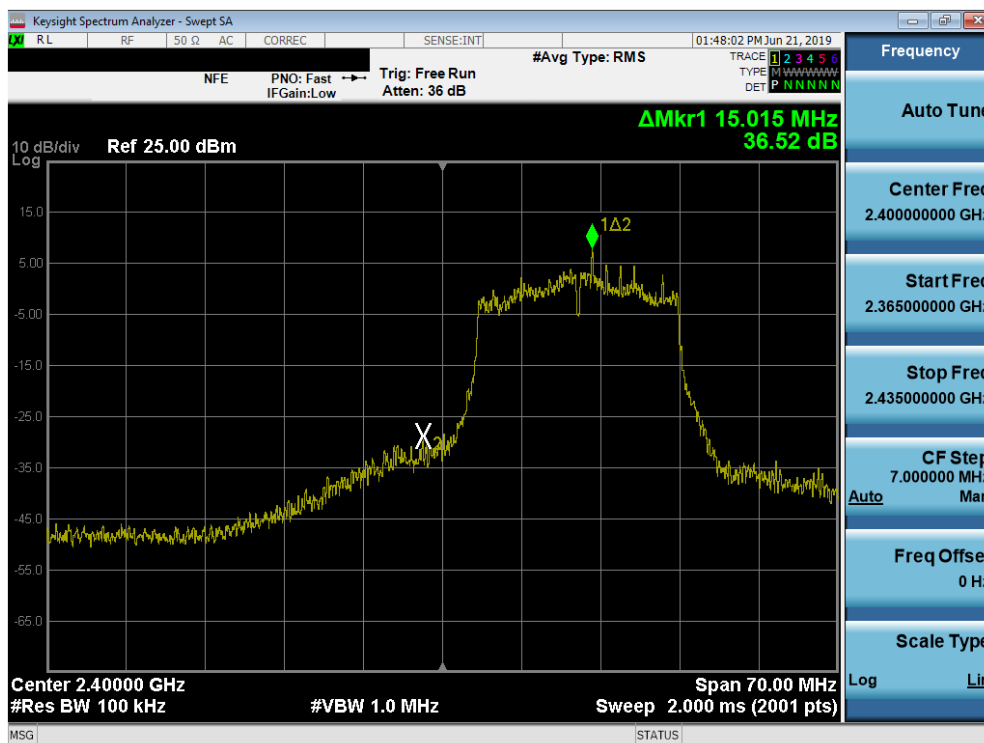


Plot 7-50. Band Edge Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 1)

|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 47 of 108                  |

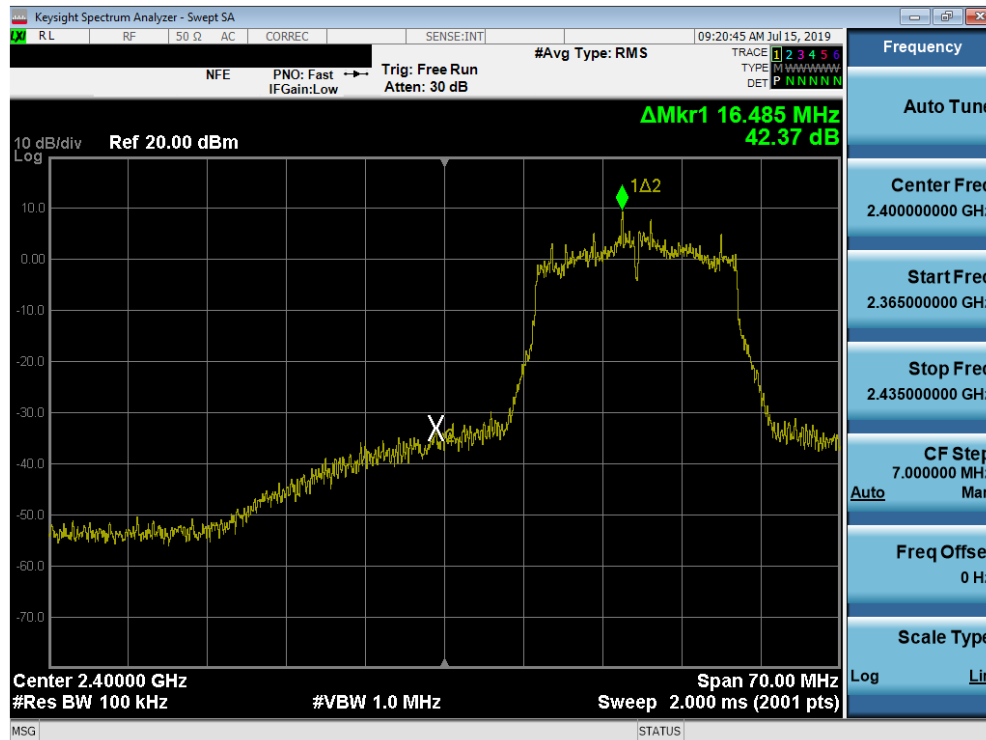


Plot 7-51. Band Edge Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 2)

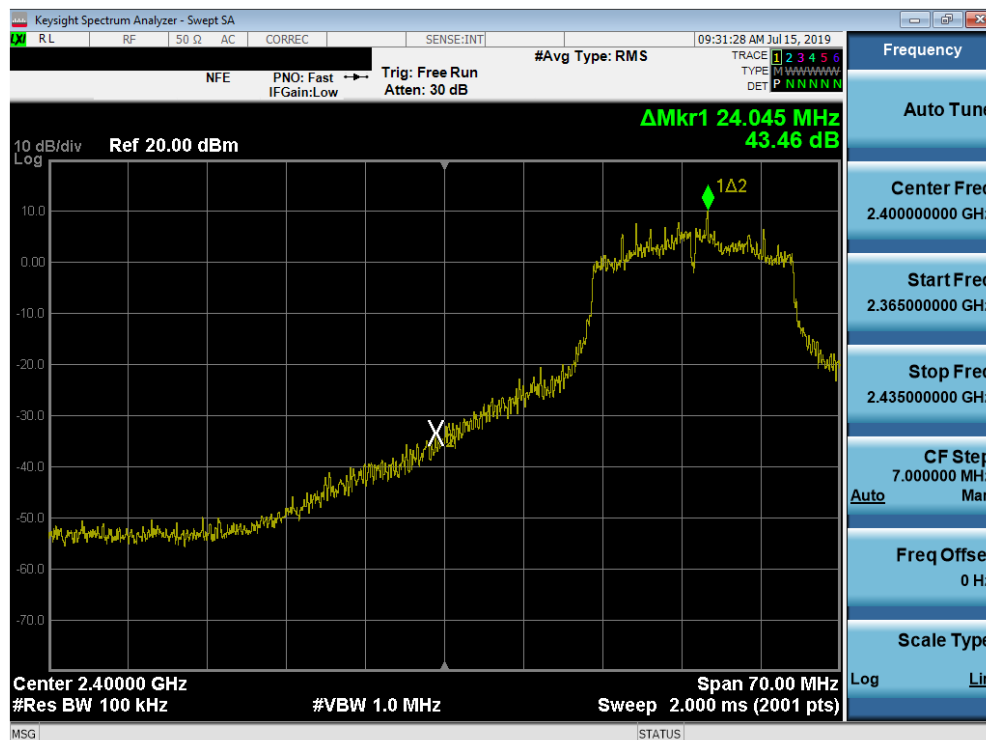


Plot 7-52. Band Edge Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 3)

|                                         |                                              |                              |  |                                 |
|-----------------------------------------|----------------------------------------------|------------------------------|--|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                              |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019               | EUT Type:<br>Portable Tablet |  | Page 48 of 108                  |

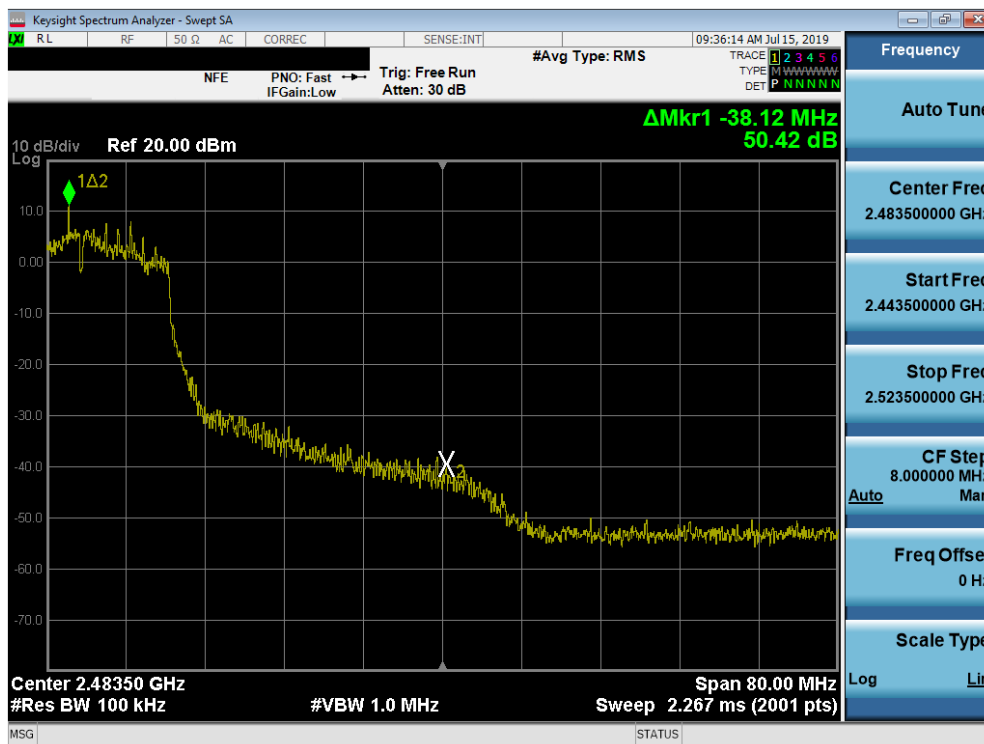


Plot 7-53. Band Edge Plot SISO ANT1 (802.11n (2.4GHz) - Ch. 8)

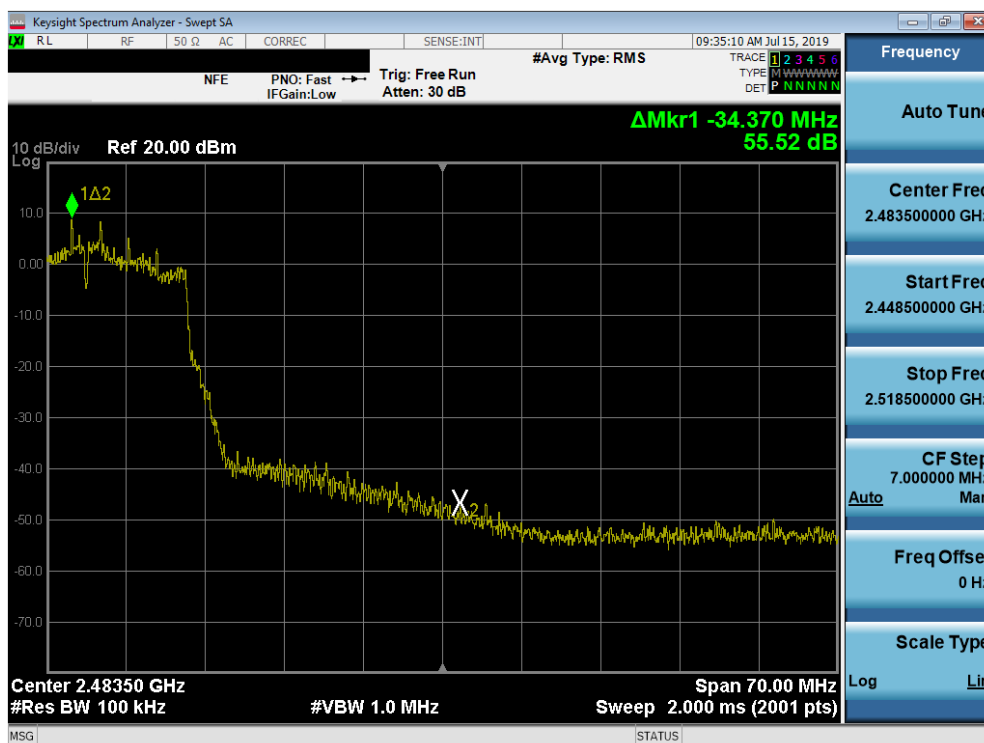


Plot 7-54. Band Edge Plot SISO ANT1 (802.11n (2.4GHz) - Ch. 9)

|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 49 of 108                  |

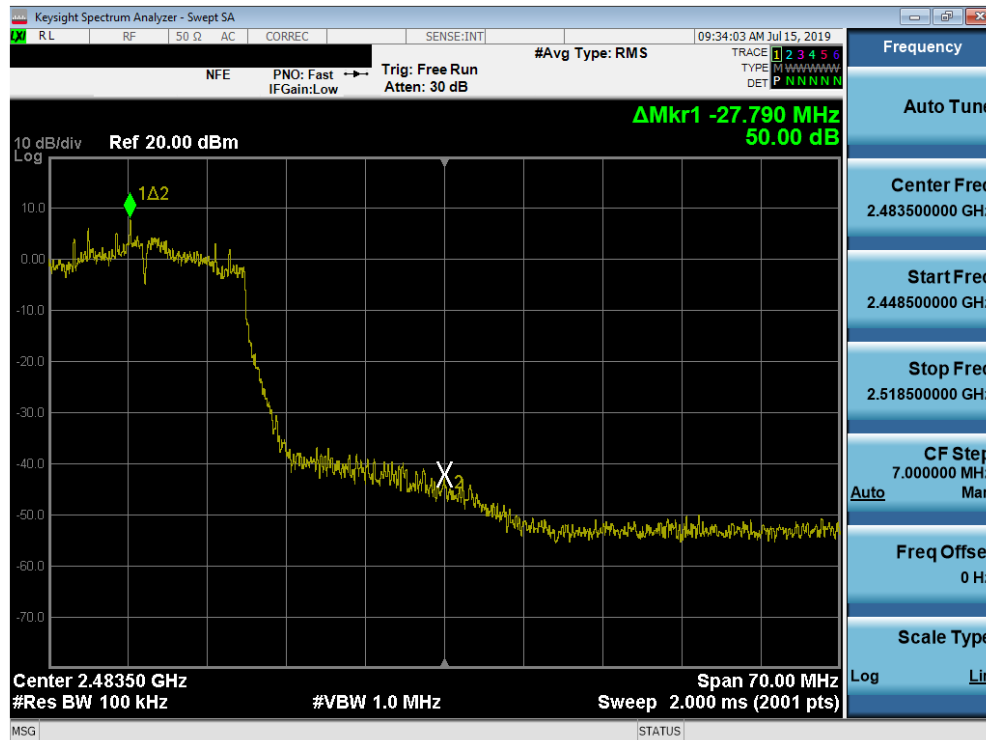


Plot 7-55. Band Edge Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 10)

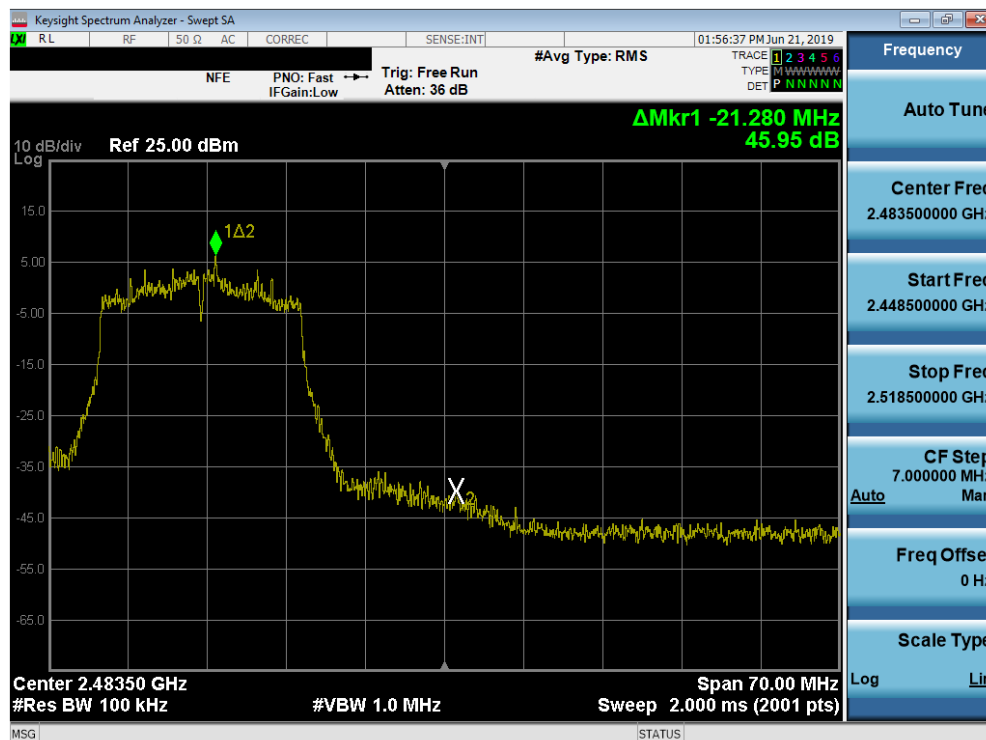


Plot 7-56. Band Edge Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 11)

|                                         |                                              |                              |                |                                 |
|-----------------------------------------|----------------------------------------------|------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                              |                | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019               | EUT Type:<br>Portable Tablet | Page 50 of 108 |                                 |

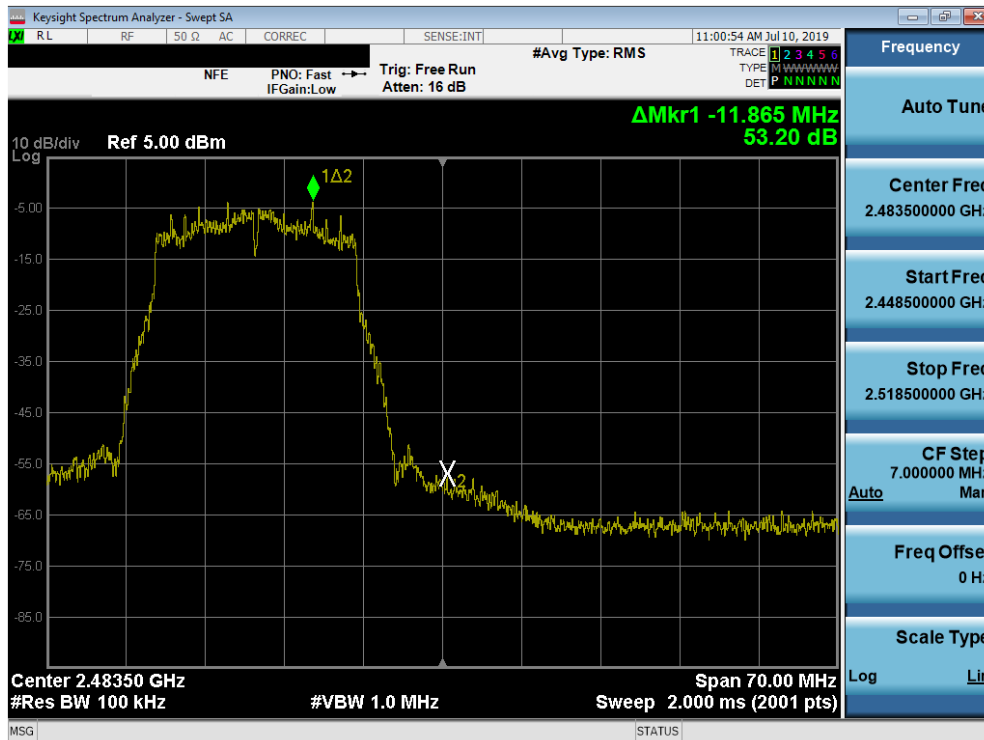


Plot 7-57. Band Edge Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 12)

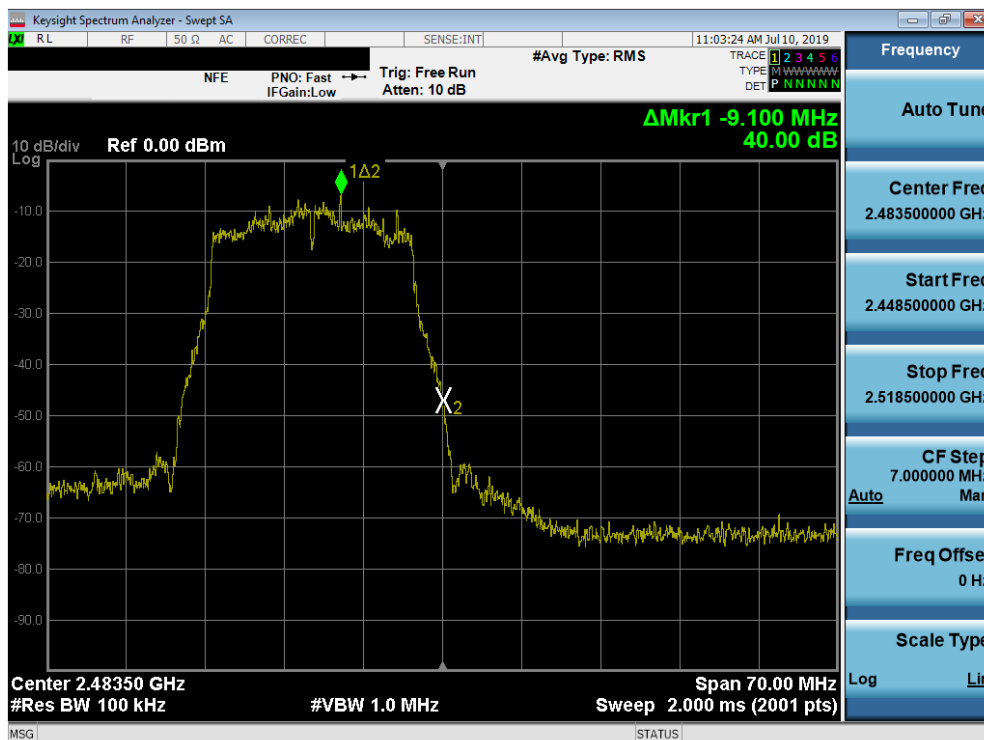


Plot 7-58. Band Edge Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 13)

|                                         |                                              |                              |  |                                 |
|-----------------------------------------|----------------------------------------------|------------------------------|--|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                              |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019               | EUT Type:<br>Portable Tablet |  | Page 51 of 108                  |

## SISO Antenna-2 Conducted Emissions at the Band Edge

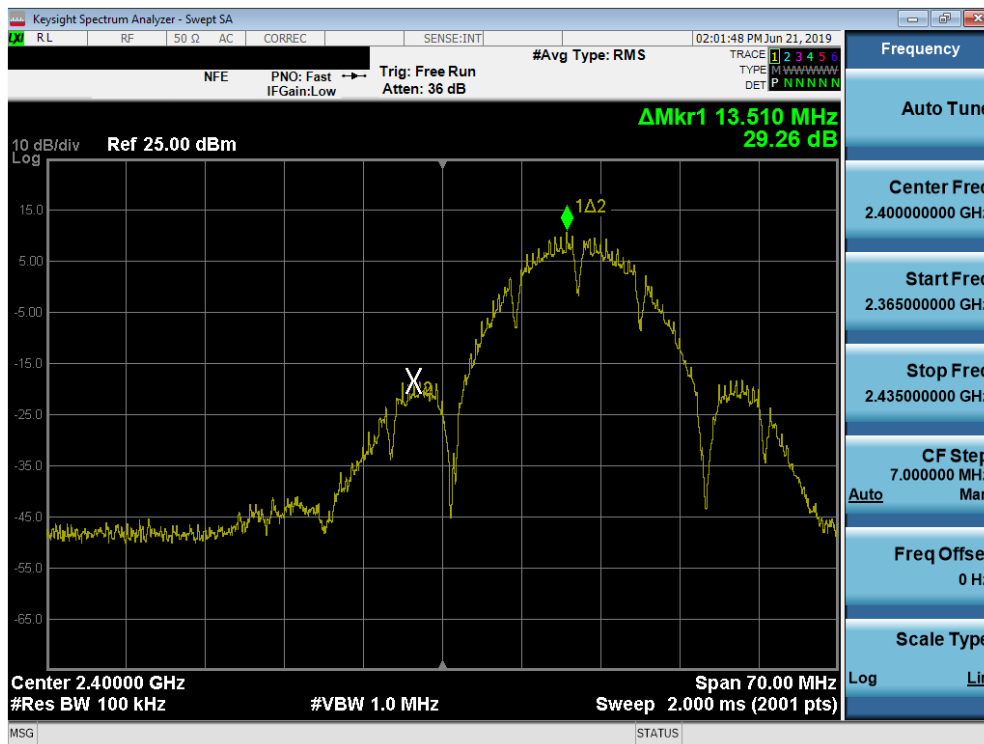


Plot 7-59. Band Edge Plot SISO ANT2 (802.11b - Ch. 1)

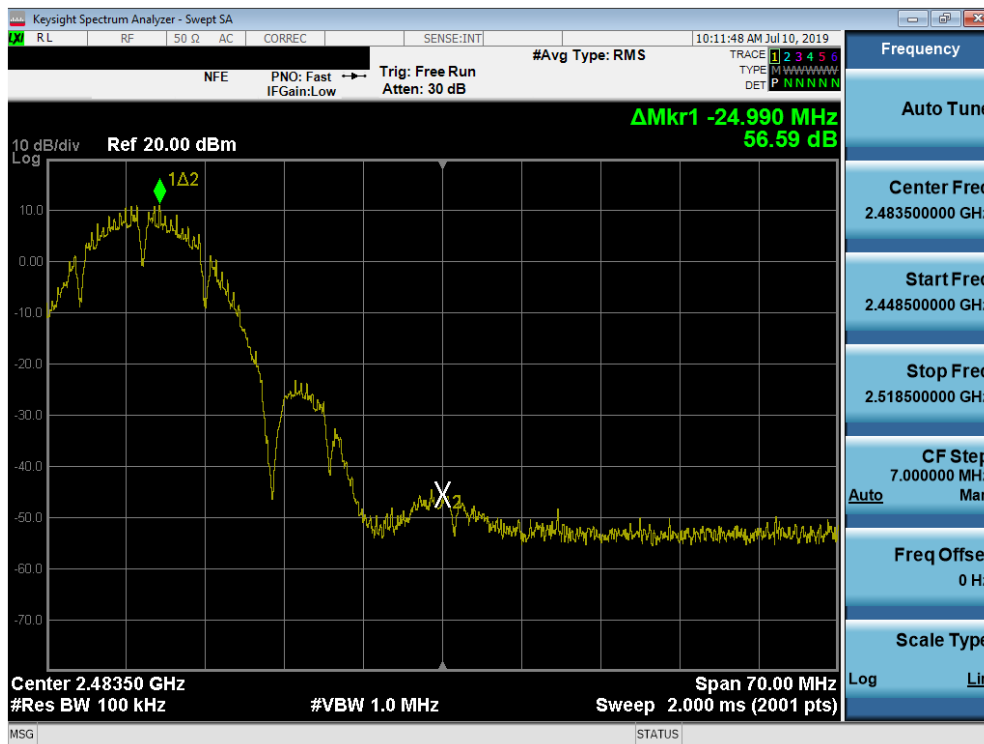


Plot 7-60. Band Edge Plot SISO ANT2 (802.11b - Ch. 10)

|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 52 of 108                  |

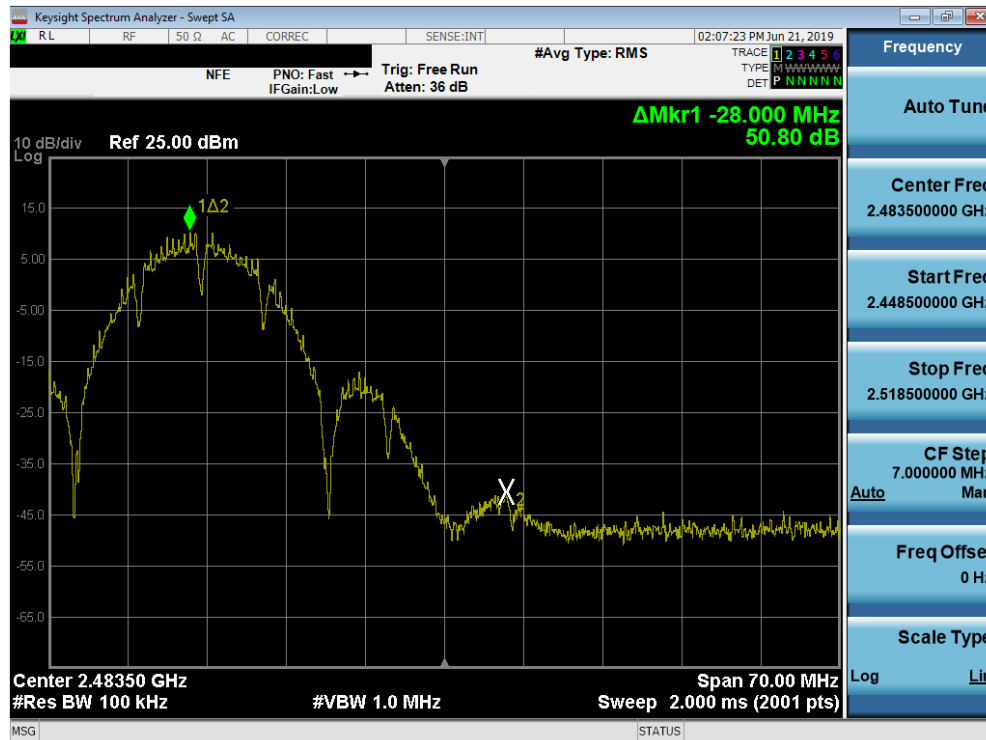


Plot 7-61. Band Edge Plot SISO ANT2 (802.11b - Ch. 11)

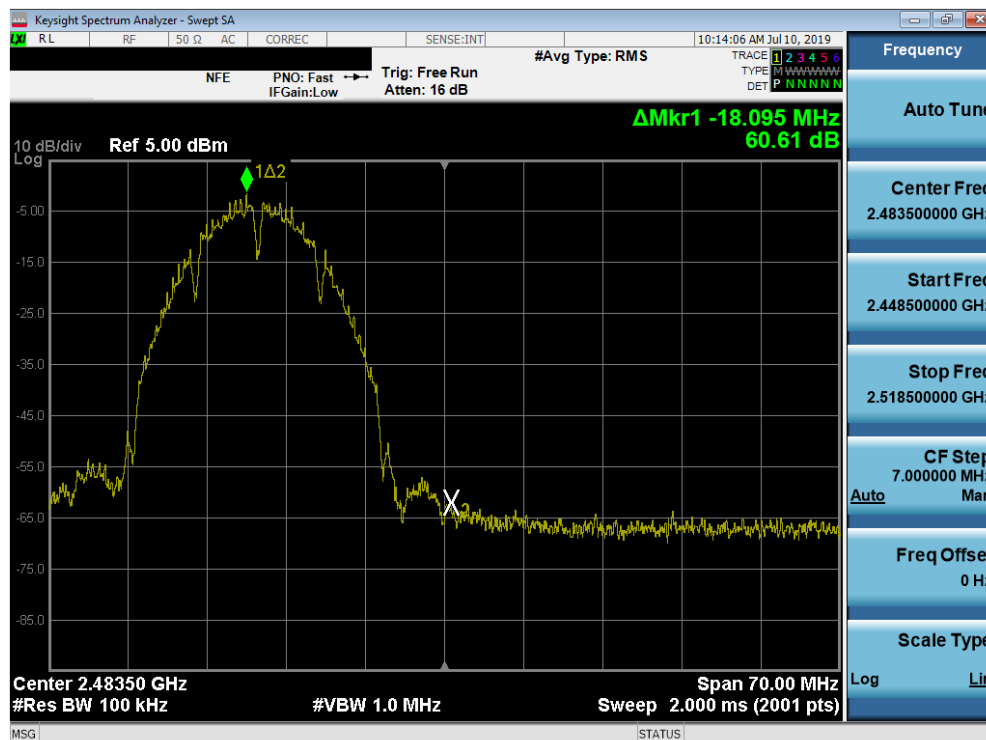


Plot 7-62. Band Edge Plot SISO ANT2 (802.11b - Ch. 12)

|                                         |                                              |                              |                |                                 |
|-----------------------------------------|----------------------------------------------|------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                              |                | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019               | EUT Type:<br>Portable Tablet | Page 53 of 108 |                                 |

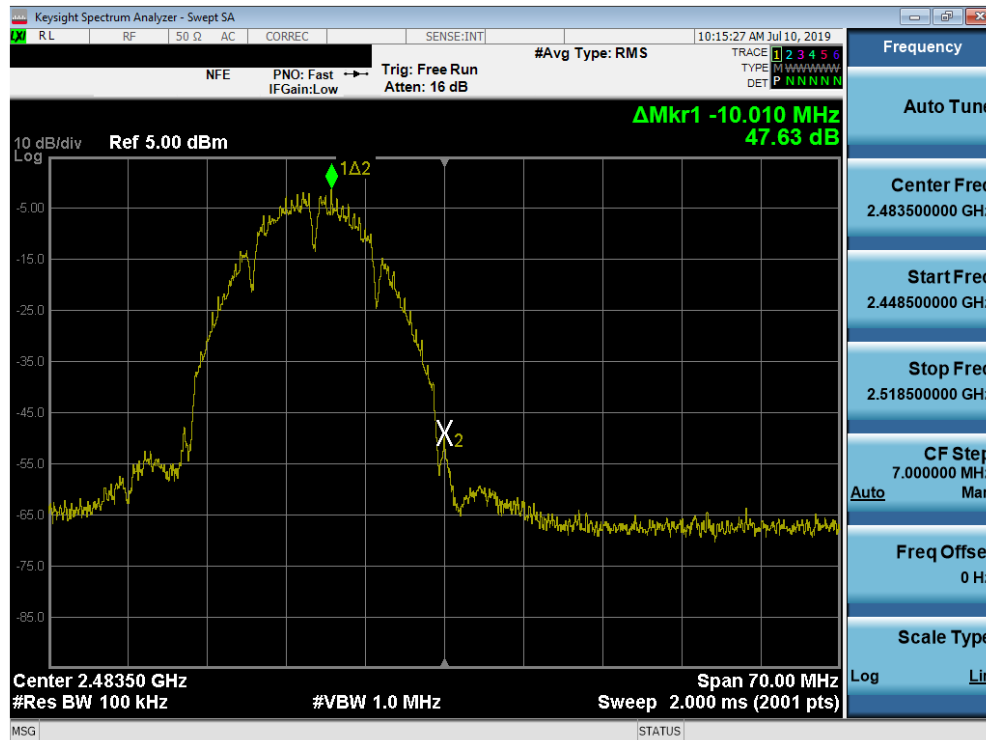


Plot 7-63. Band Edge Plot SISO ANT2 (802.11b – Ch. 13)

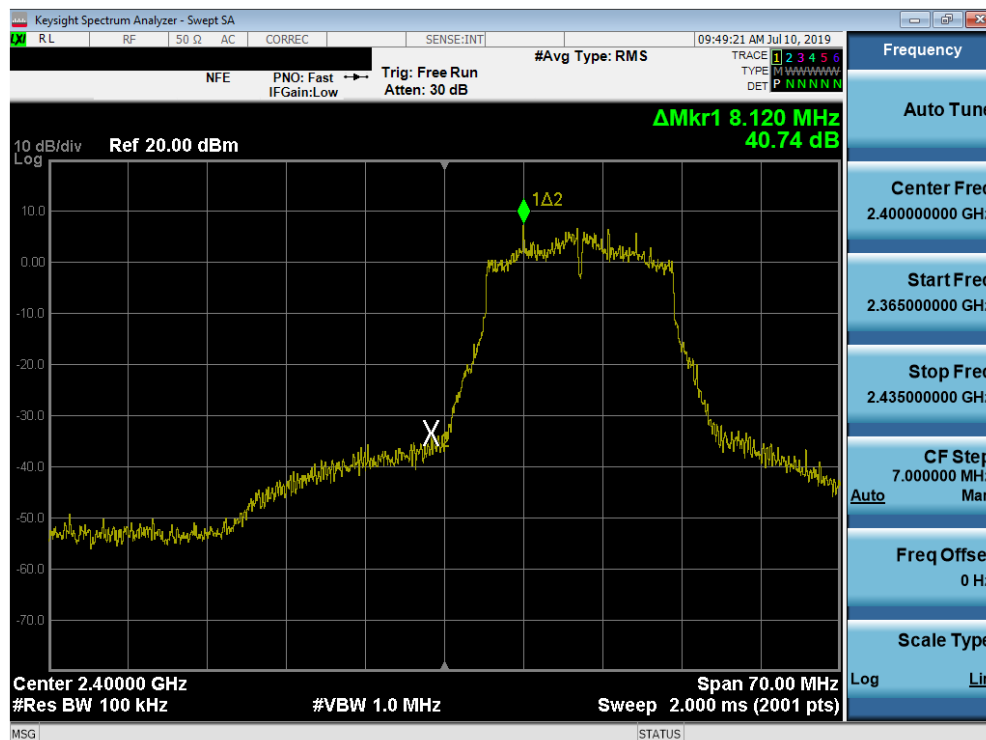


Plot 7-64. Band Edge Plot SISO ANT2 (802.11g- Ch. 1)

|                                         |                                              |                              |  |                                 |
|-----------------------------------------|----------------------------------------------|------------------------------|--|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                              |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019               | EUT Type:<br>Portable Tablet |  | Page 54 of 108                  |

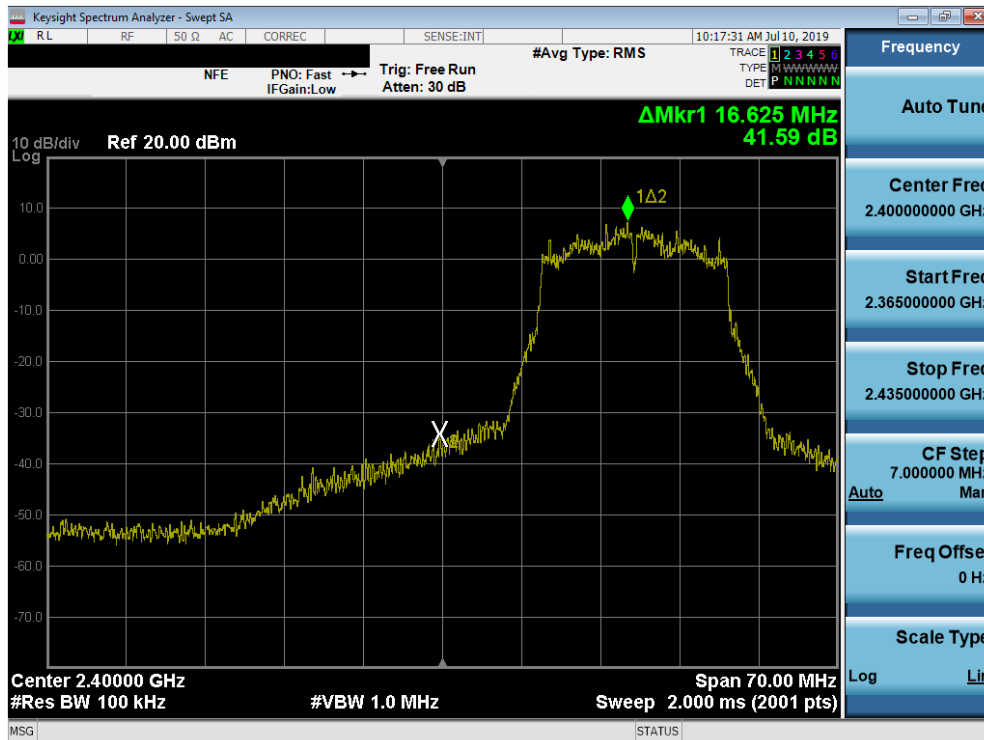


Plot 7-65. Band Edge Plot SISO ANT2 (802.11g- Ch. 2)

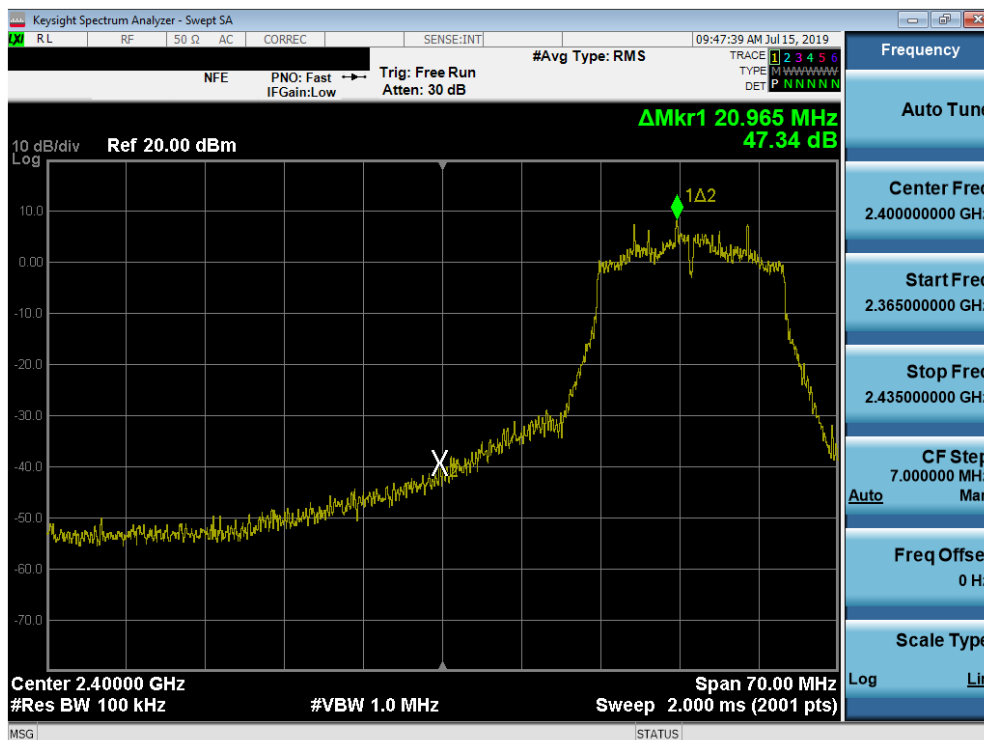


Plot 7-66. Band Edge Plot SISO ANT2 (802.11g- Ch. 3)

|                                         |                                              |                              |                |                                 |
|-----------------------------------------|----------------------------------------------|------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                              |                | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019               | EUT Type:<br>Portable Tablet | Page 55 of 108 |                                 |

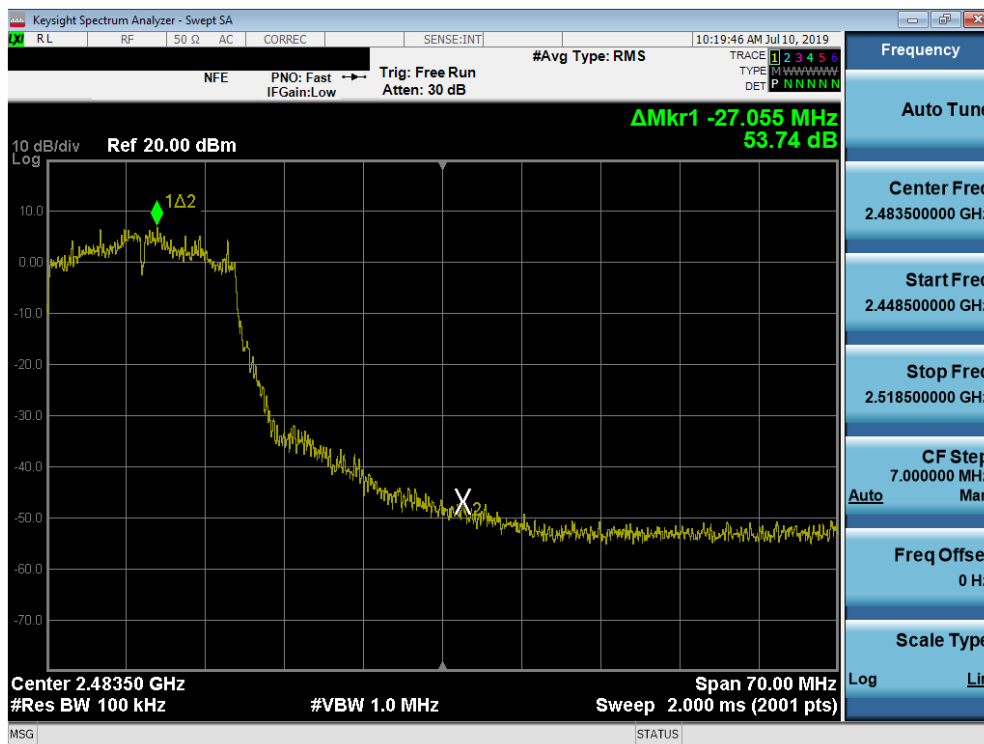


Plot 7-67. Band Edge Plot SISO ANT2 (802.11g – Ch. 10)

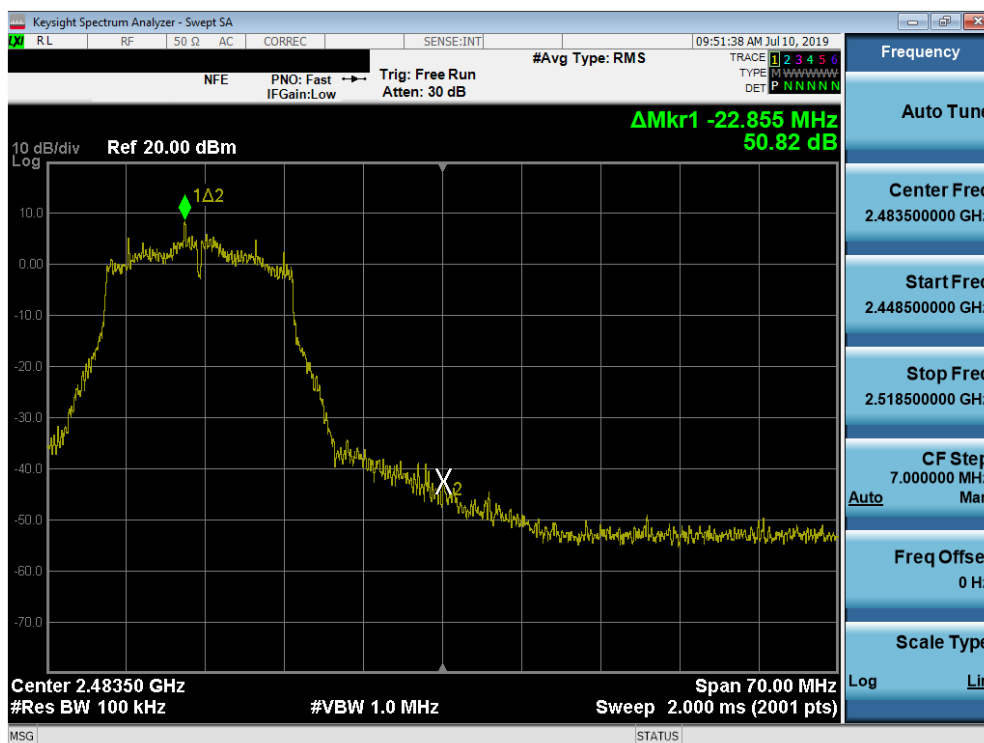

Plot 7-68. Band Edge Plot SISO ANT2 (802.11g – Ch. 11)

|                                         |                                              |                              |  |                                 |
|-----------------------------------------|----------------------------------------------|------------------------------|--|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                              |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019               | EUT Type:<br>Portable Tablet |  | Page 56 of 108                  |

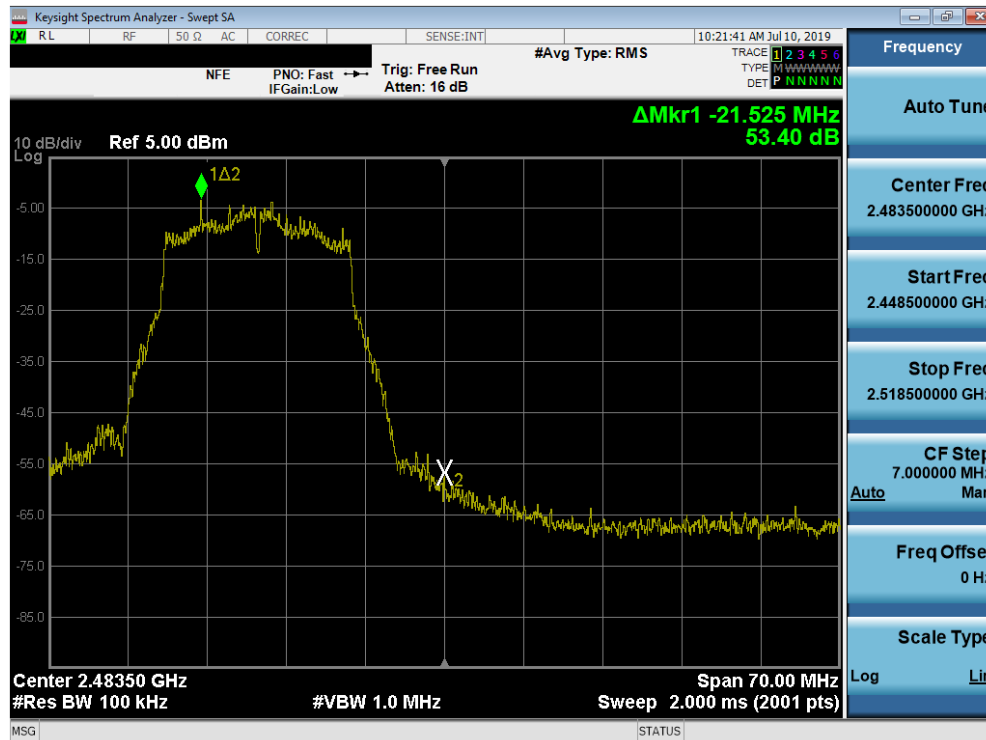


Plot 7-69. Band Edge Plot SISO ANT2 (802.11g – Ch. 12)




Plot 7-70. Band Edge Plot SISO ANT2 (802.11g – Ch. 13)

|                                         |                                              |                              |  |                                 |
|-----------------------------------------|----------------------------------------------|------------------------------|--|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                              |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019               | EUT Type:<br>Portable Tablet |  | Page 57 of 108                  |

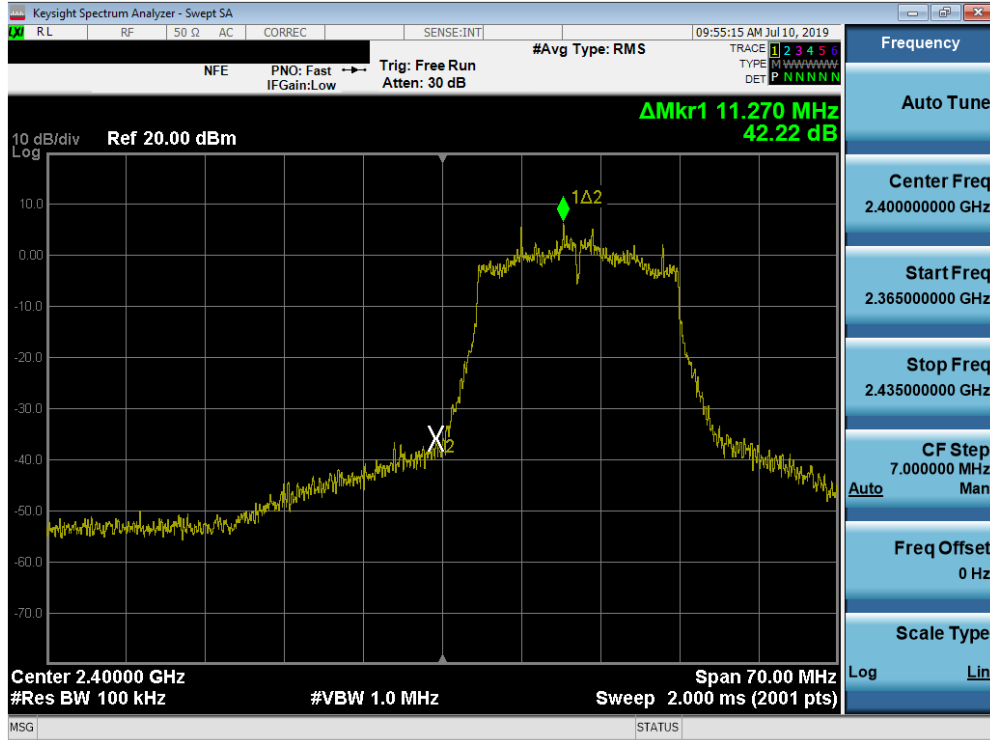


Plot 7-71. Band Edge Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 1)

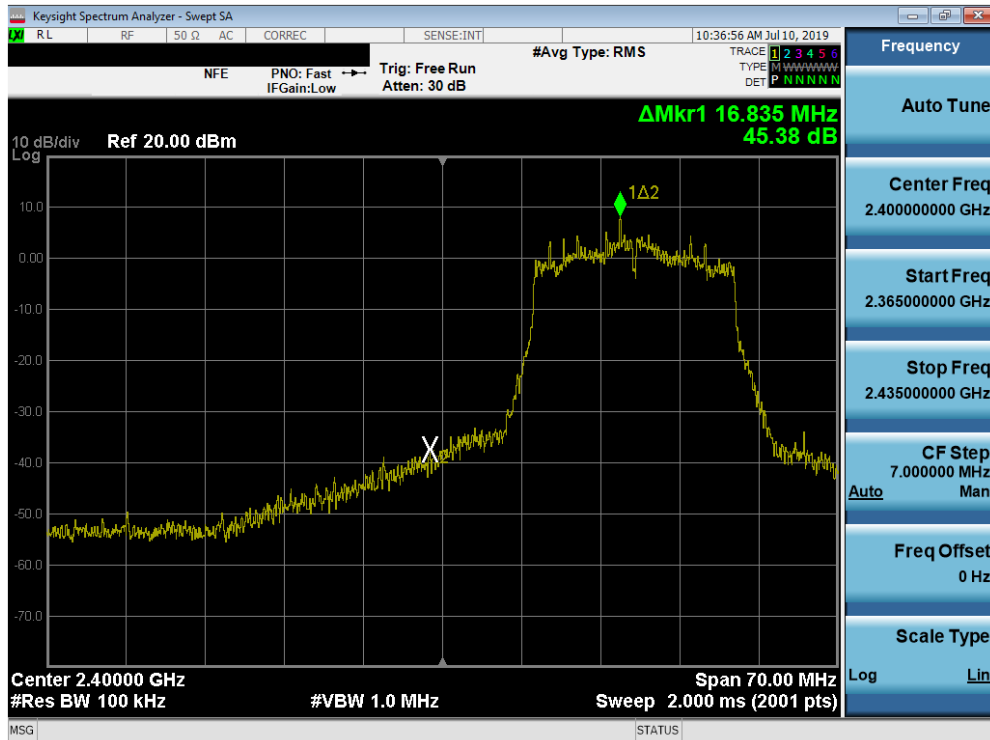


Plot 7-72. Band Edge Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 2)

|                                         |                                              |                              |  |                                 |
|-----------------------------------------|----------------------------------------------|------------------------------|--|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                              |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019               | EUT Type:<br>Portable Tablet |  | Page 58 of 108                  |

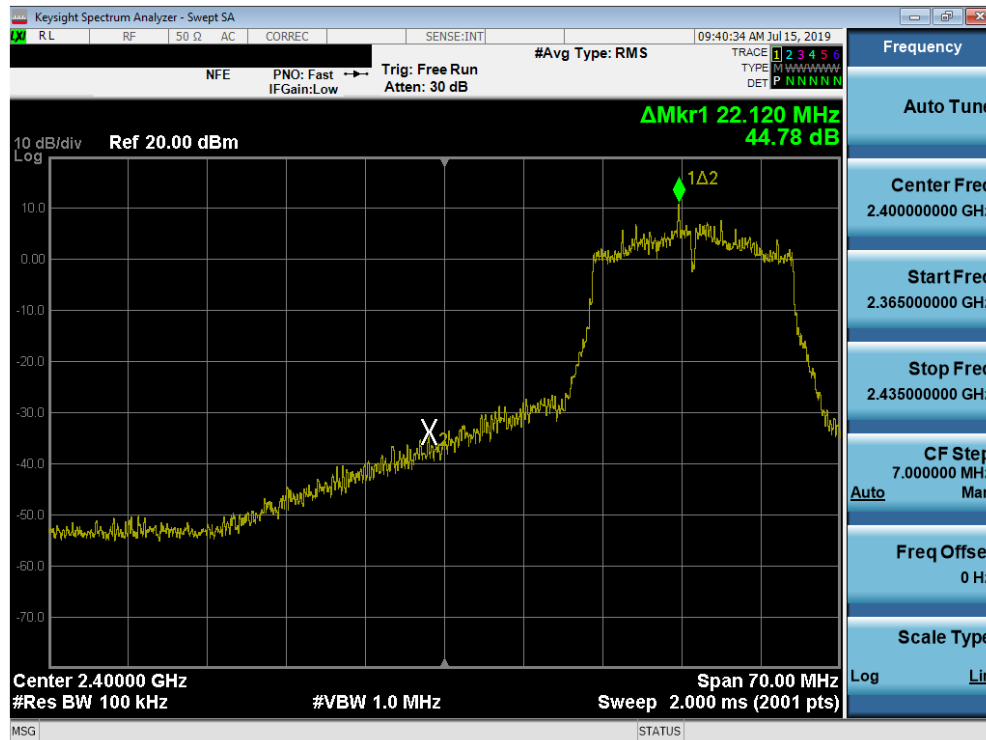


Plot 7-73. Band Edge Plot SISO ANT2 (802.11n) (2.4GHz) – Ch. 3)

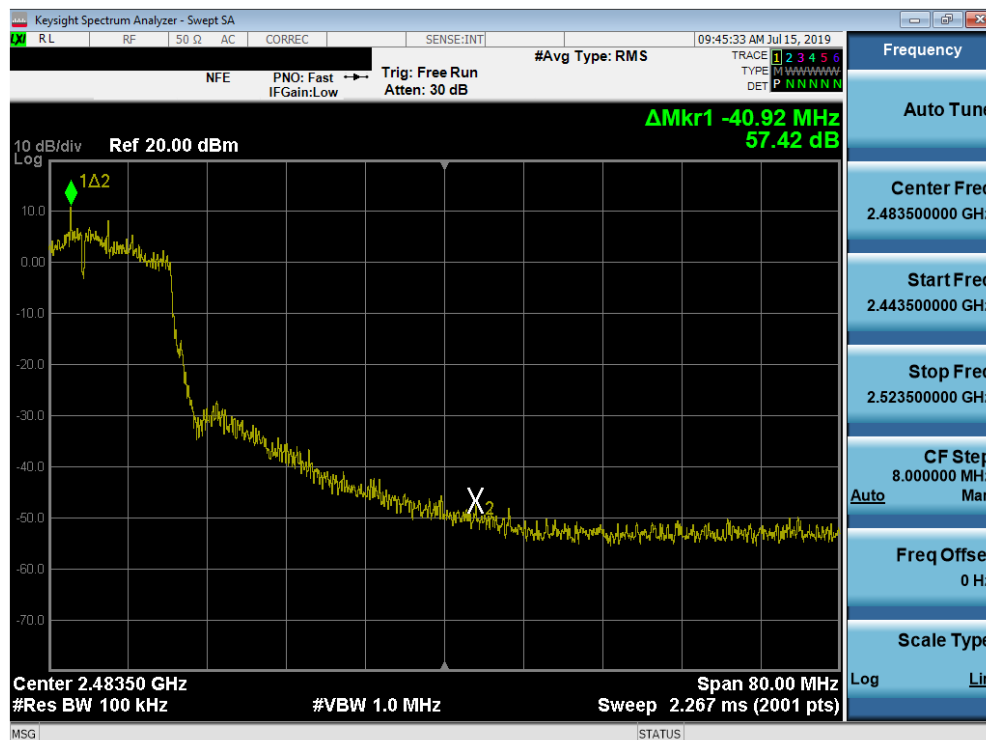


Plot 7-74. Band Edge Plot SISO ANT2 (802.11n) (2.4GHz) – Ch. 8)

|                                         |                                              |                              |                |                                 |
|-----------------------------------------|----------------------------------------------|------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                              |                | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019               | EUT Type:<br>Portable Tablet | Page 59 of 108 |                                 |

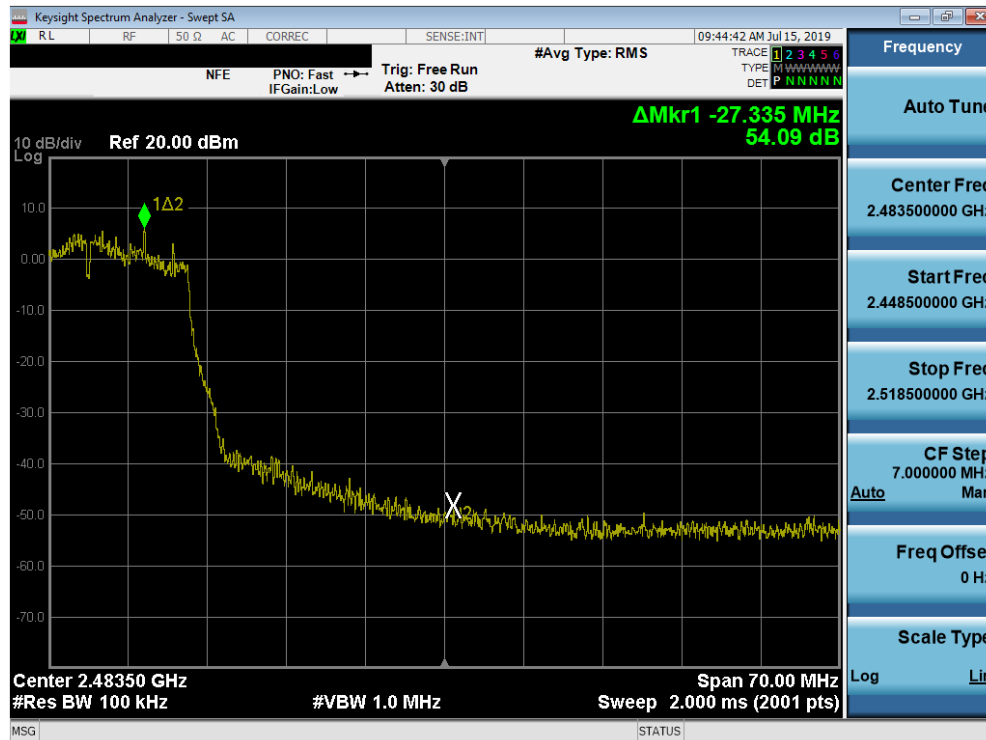


Plot 7-75. Band Edge Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 9)

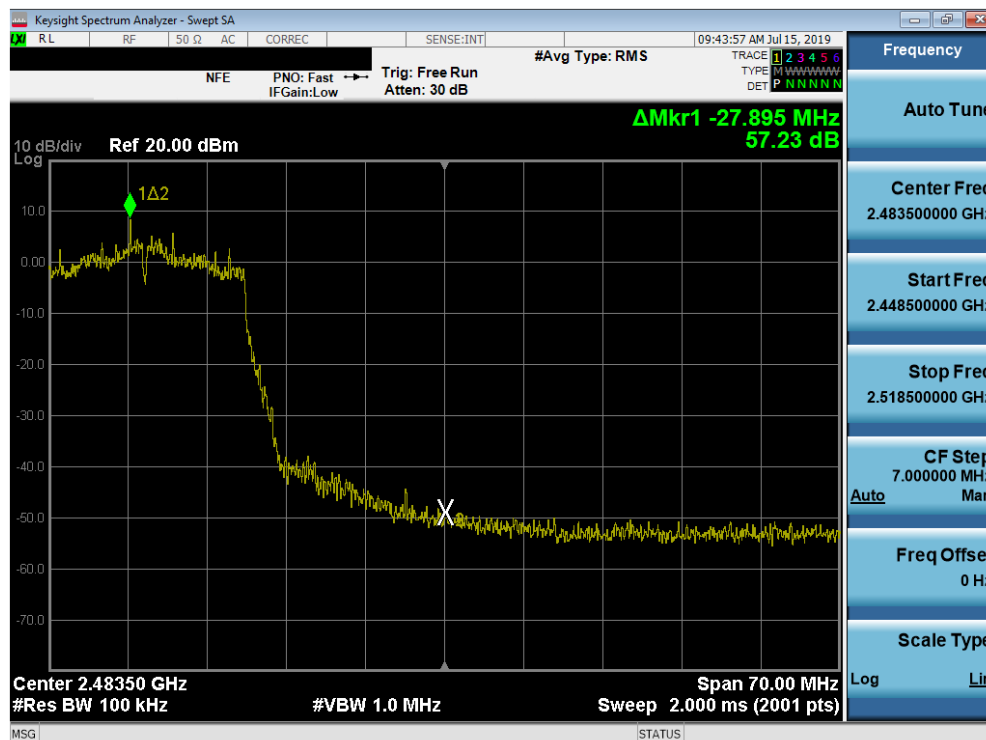


Plot 7-76. Band Edge Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 10)

|                                         |                                              |                              |  |                                 |
|-----------------------------------------|----------------------------------------------|------------------------------|--|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                              |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019               | EUT Type:<br>Portable Tablet |  | Page 60 of 108                  |

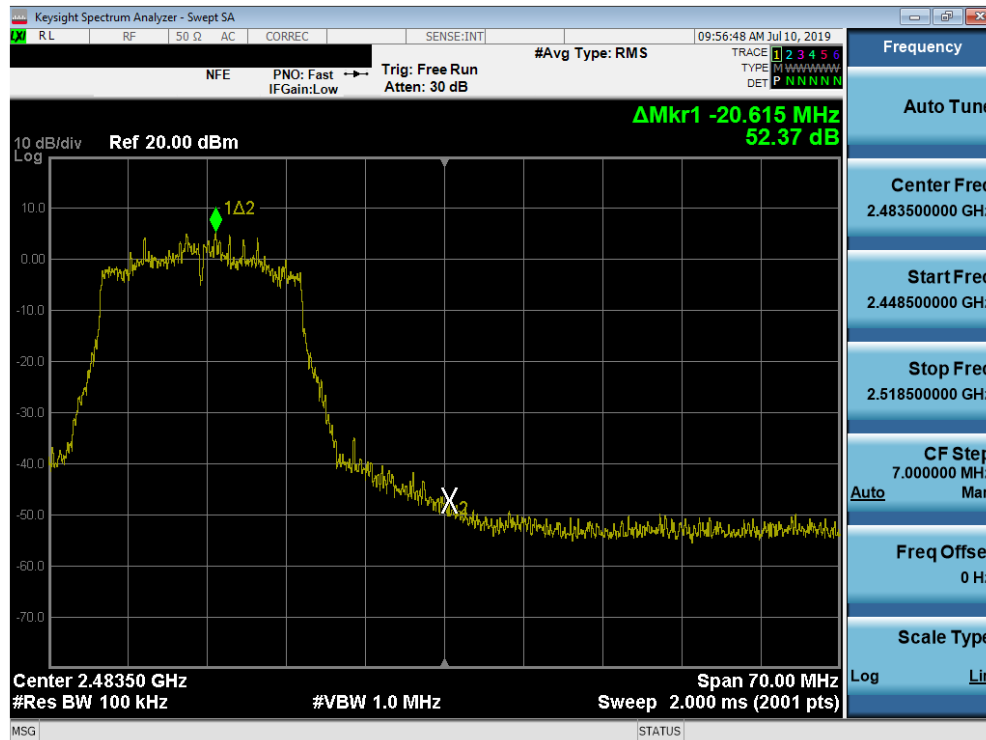


Plot 7-77. Band Edge Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 11)

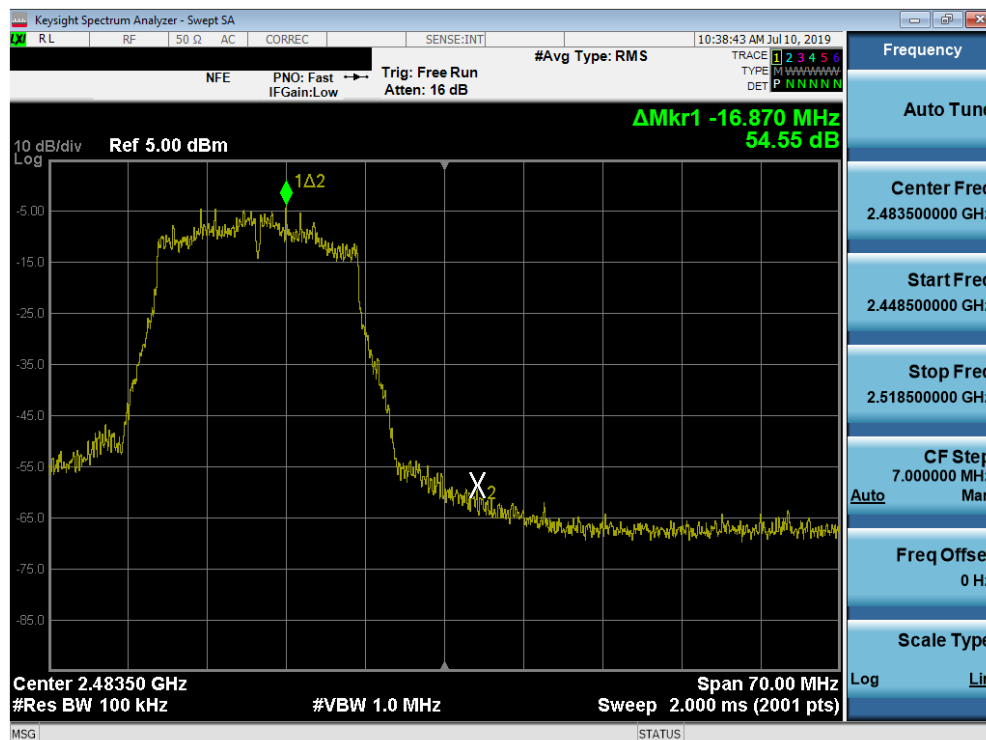

Plot 7-78. Band Edge Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 12)

|                                         |                                              |                              |                |                                 |
|-----------------------------------------|----------------------------------------------|------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                              |                | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019               | EUT Type:<br>Portable Tablet | Page 61 of 108 |                                 |

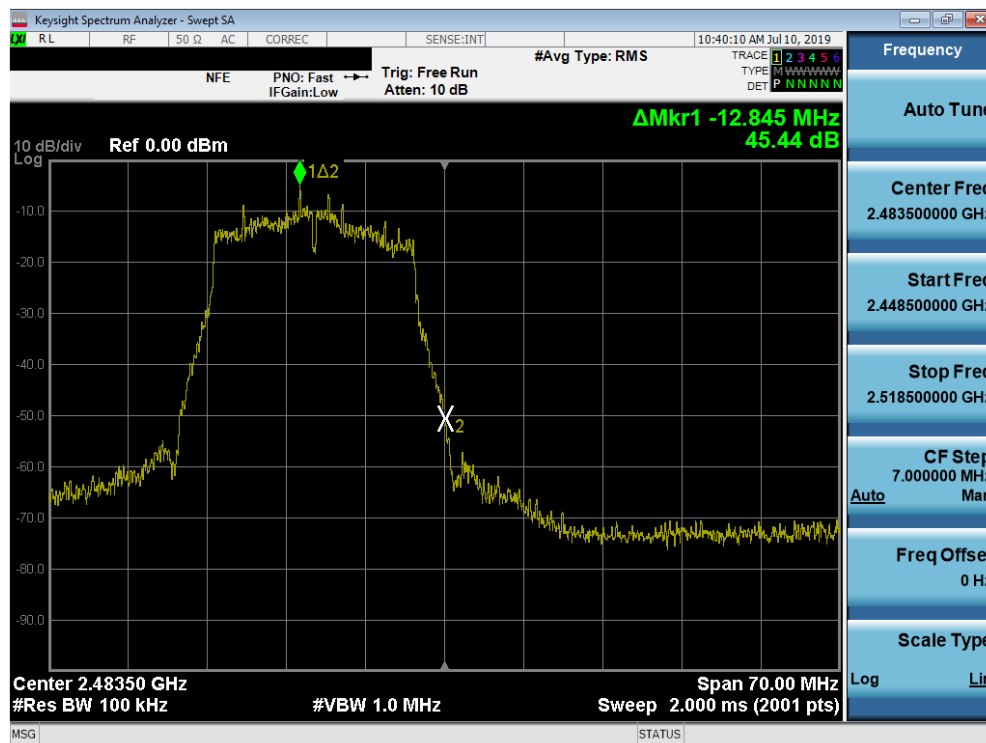

Plot 7-79. Band Edge Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 13)

|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 62 of 108                  |

## 7.6 Conducted Spurious Emissions

§15.247(d); RSS-247 [5.5]

### Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. For the following out of band conducted spurious emissions plots, the EUT was investigated in all available data rates for “b”, “g”, “n”, “ax” modes. The worst case spurious emissions for the 2.4GHz band were found while transmitting in “b” mode at 1 Mbps and are shown in the plots below.

***The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the procedure in Section 11.1 of ANSI C63.10-2013 and KDB 558074 D01 v05r02.***

### Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3  
KDB 558074 D01 v05r02 – Section 8.5  
ANSI C63.10-2013 – Section 14.3.3  
KDB 662911 D01 v02r01 – Section E)3)b)

### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-5. Test Instrument & Measurement Setup**


|                                         |                                                                                     |                                       |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  | MEASUREMENT REPORT<br>(CERTIFICATION) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                      | EUT Type:<br>Portable Tablet          |                                                                                       | Page 63 of 108                  |

## Test Notes


1. RBW was set to 1MHz rather than 100kHz in order to increase the measurement speed.
2. The display line shown in the following plots denotes the limit at 30dB below the fundamental emission level measured in a 100kHz bandwidth. However, since the traces in the following plots are measured with a 1MHz RBW, the display line may not necessarily appear to be 30dB below the level of the fundamental in a 1MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.
4. The conducted spurious emissions were measured to relative limits. Therefore, in accordance with ANSI C63.10-2013 and KDB 662911 D01 v02r01 Section E)3)b), it was unnecessary to show compliance through the summation of test results of the individual outputs.

|                                         |                                                                                     |                                       |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  | MEASUREMENT REPORT<br>(CERTIFICATION) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                      | EUT Type:<br>Portable Tablet          |                                                                                       | Page 64 of 108                  |

## SISO Antenna-1 Conducted Spurious Emission

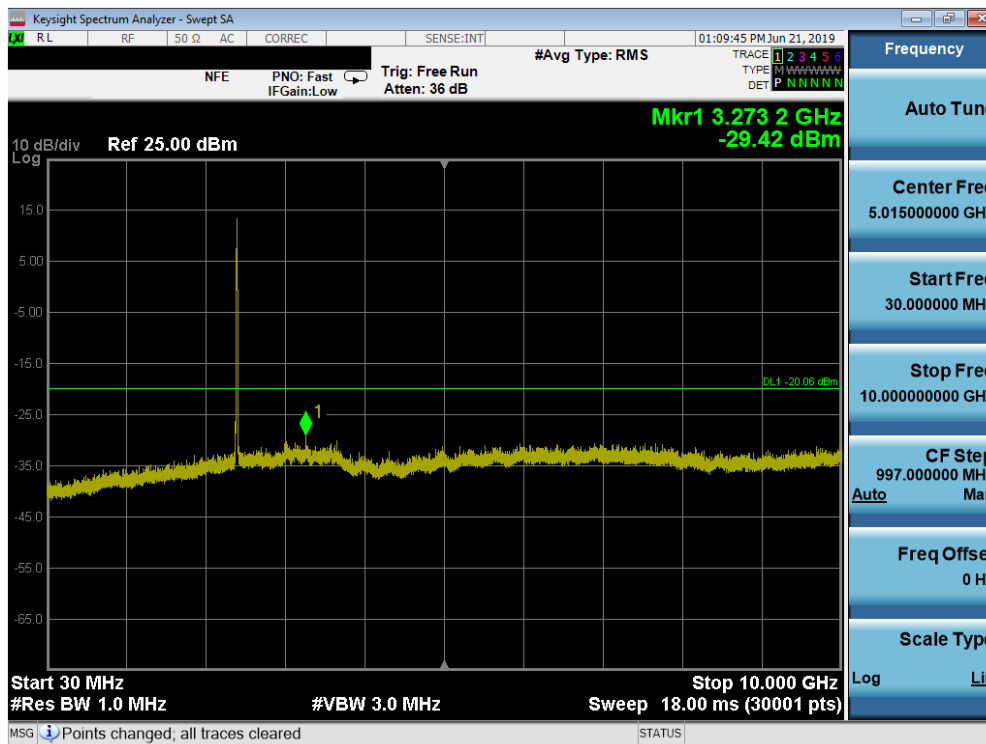


Plot 7-80. Conducted Spurious Plot SISO ANT1 (802.11b – Ch. 1)

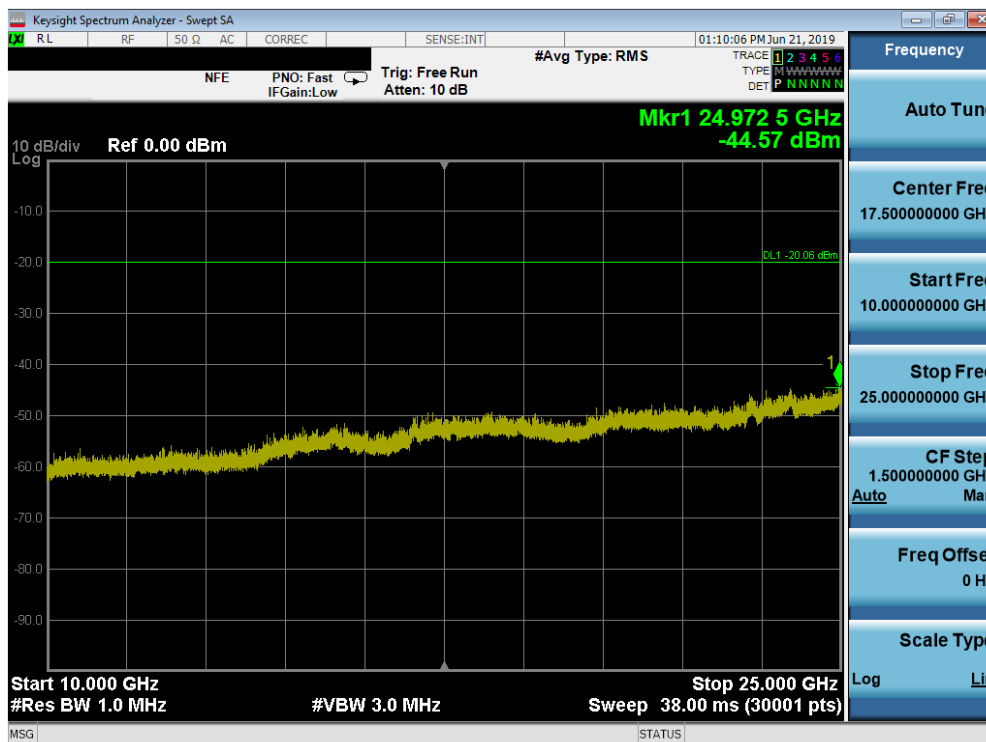


Plot 7-81. Conducted Spurious Plot SISO ANT1 (802.11b – Ch. 1)


|                                         |                                              |                              |                |                                 |
|-----------------------------------------|----------------------------------------------|------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                              |                | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019               | EUT Type:<br>Portable Tablet | Page 65 of 108 |                                 |

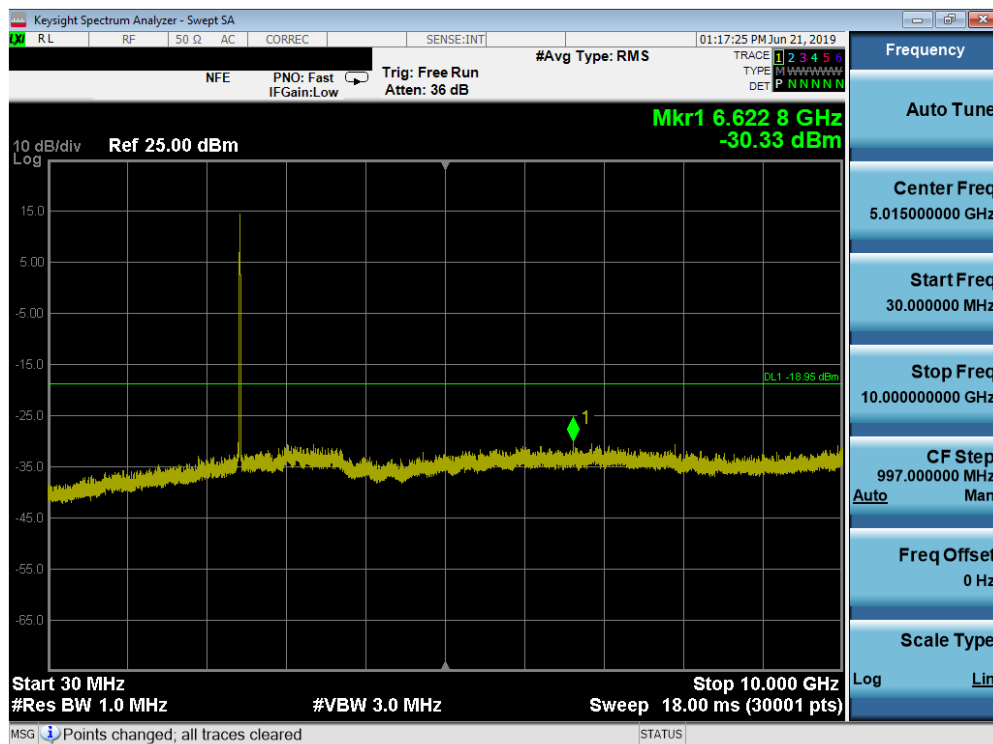


### Plot 7-82. Conducted Spurious Plot SISO ANT1 (802.11b – Ch. 6)

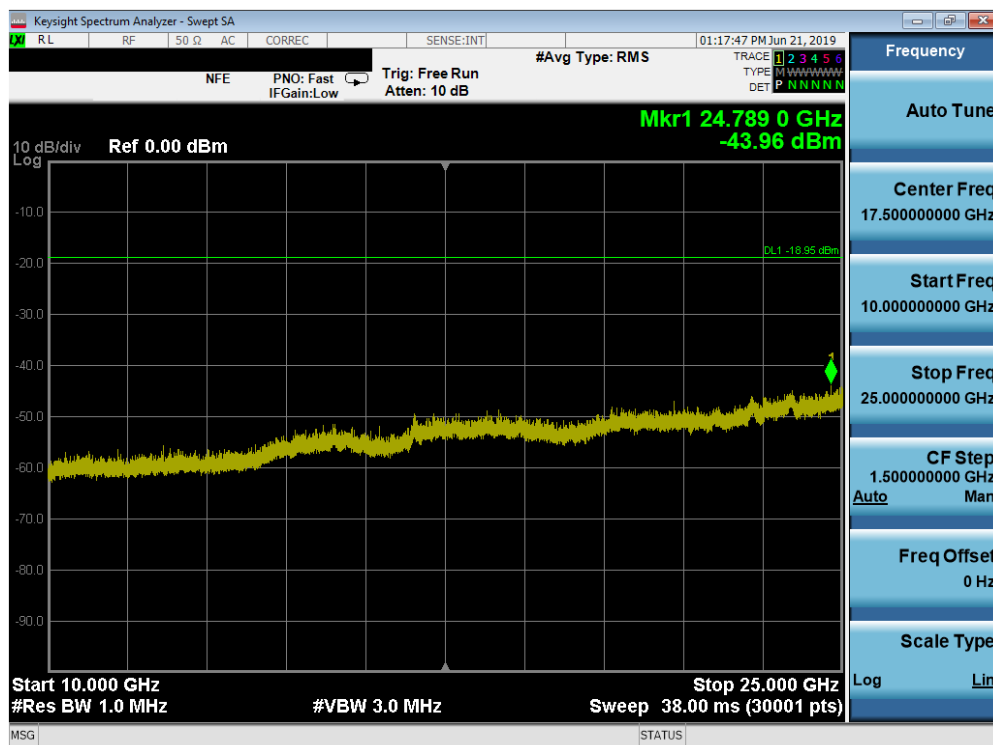

### Plot 7-83. Conducted Spurious Plot SISO ANT1 (802.11b – Ch. 6)

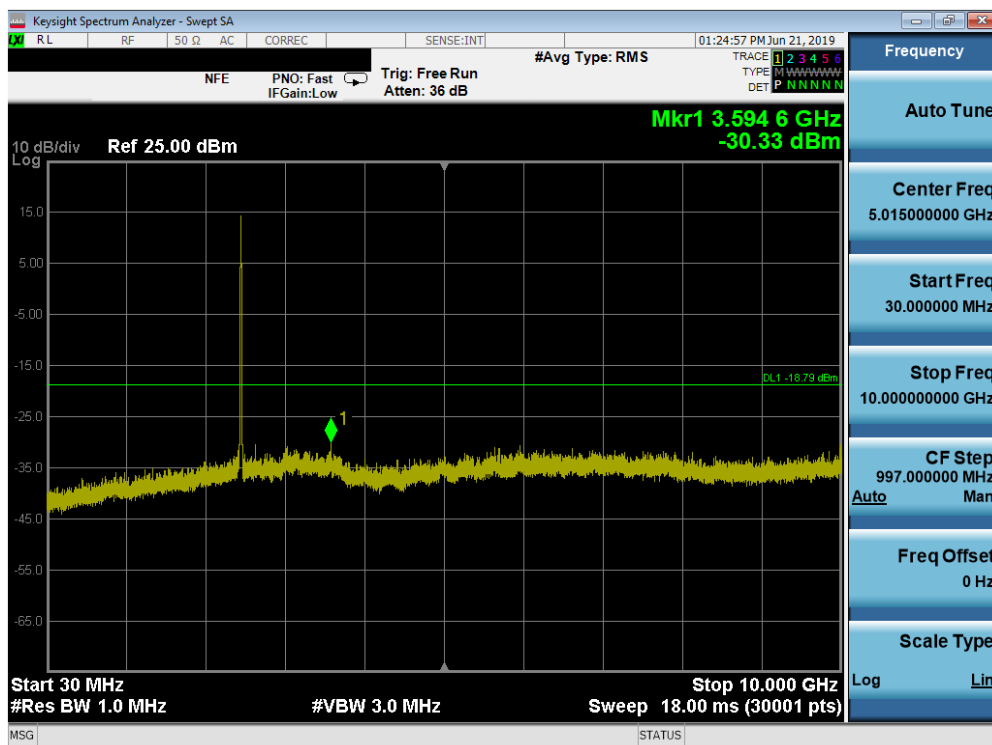


Plot 7-84. Conducted Spurious Plot SISO ANT1 (802.11b – Ch. 11)

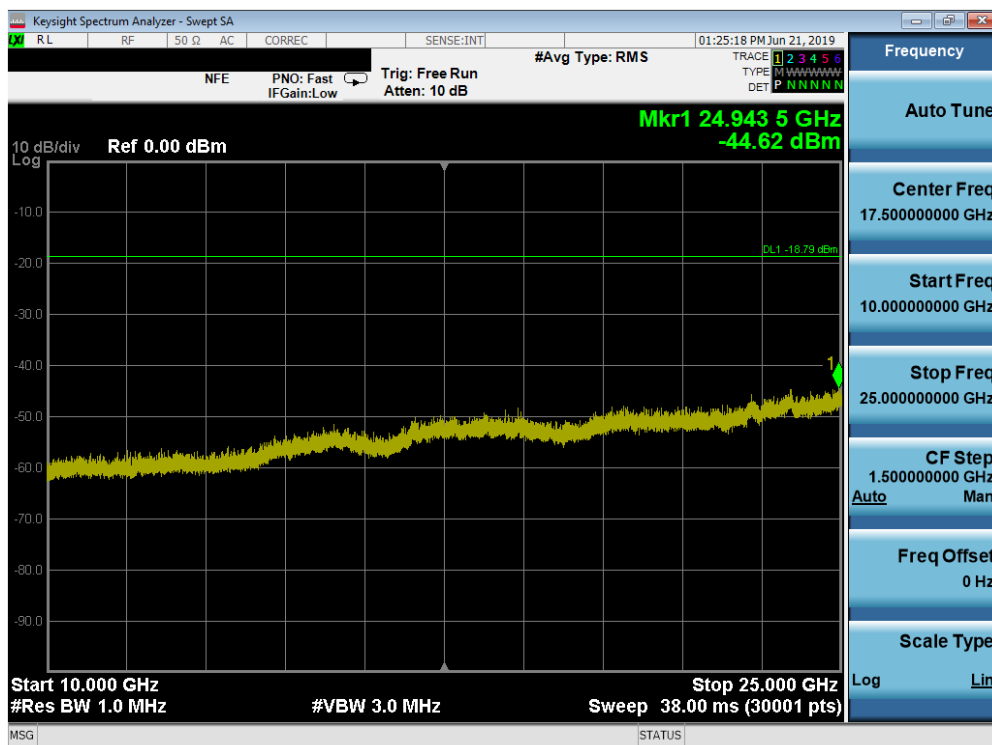


Plot 7-85. Conducted Spurious Plot SISO ANT1 (802.11b – Ch. 11)

|                                         |                                              |                              |  |                                 |
|-----------------------------------------|----------------------------------------------|------------------------------|--|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                              |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019               | EUT Type:<br>Portable Tablet |  | Page 67 of 108                  |

## SISO Antenna-2 Conducted Spurious Emissions

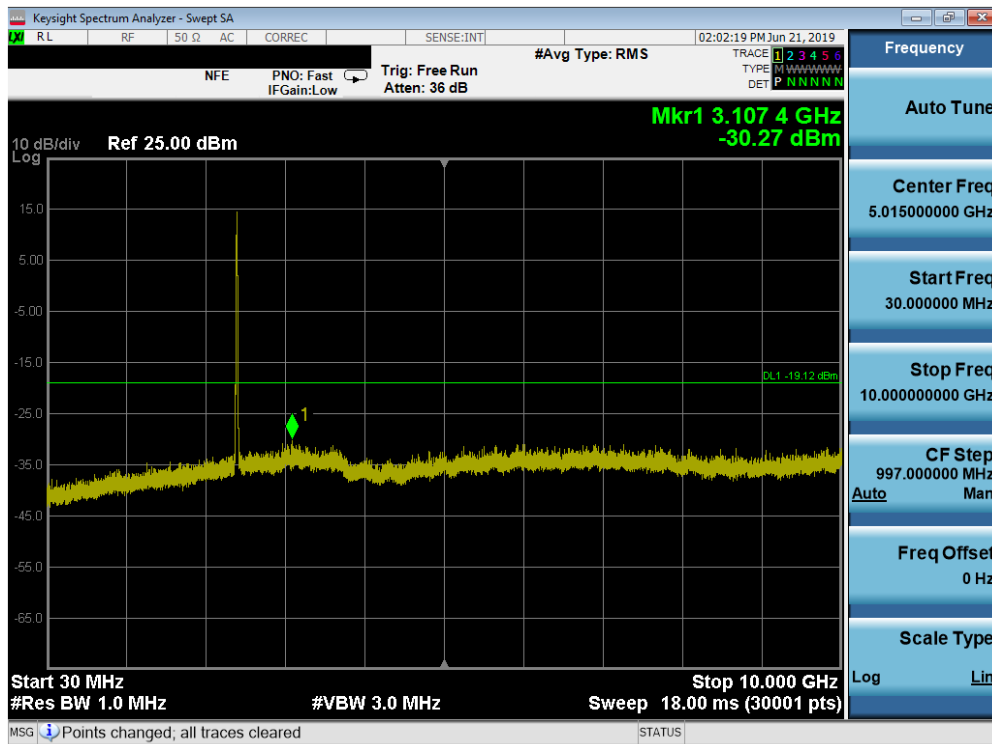


Plot 7-86. Conducted Spurious Plot SISO ANT2 (802.11b – Ch. 1)

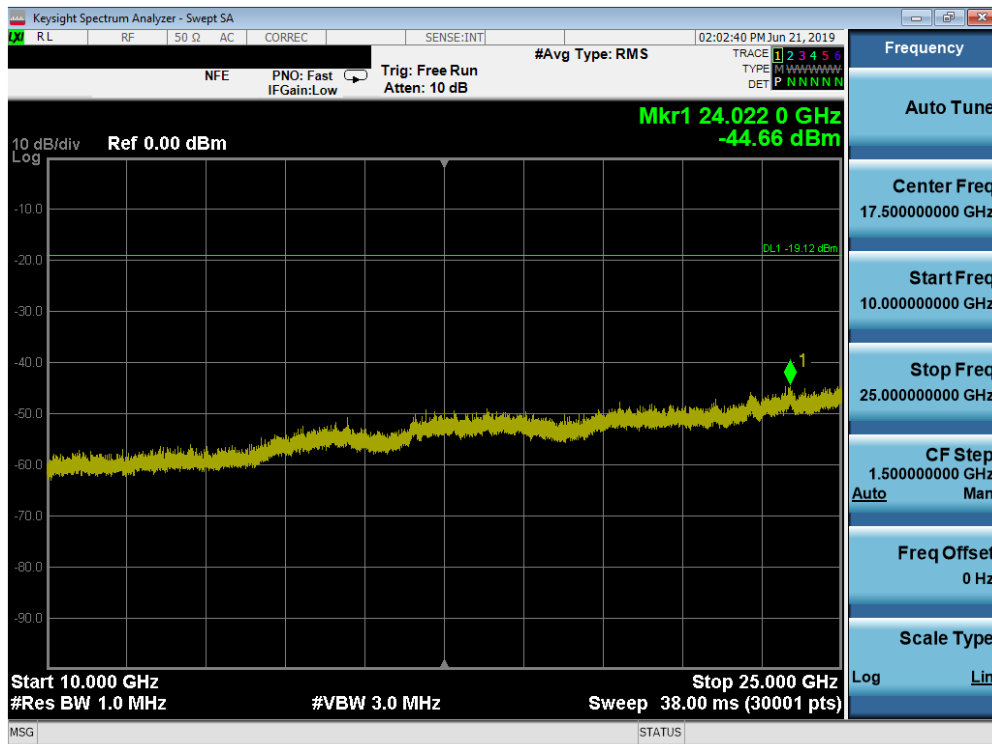


Plot 7-87. Conducted Spurious Plot SISO ANT2 (802.11b – Ch. 1)

|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 68 of 108                  |

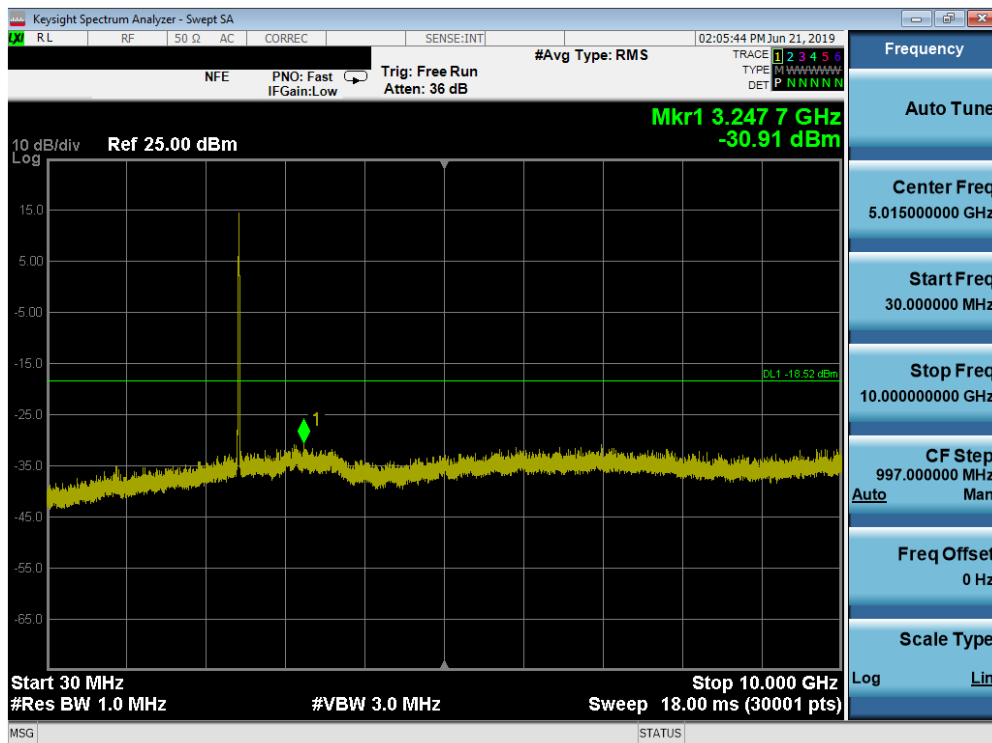


Plot 7-88. Conducted Spurious Plot SISO ANT2 (802.11b – Ch. 6)

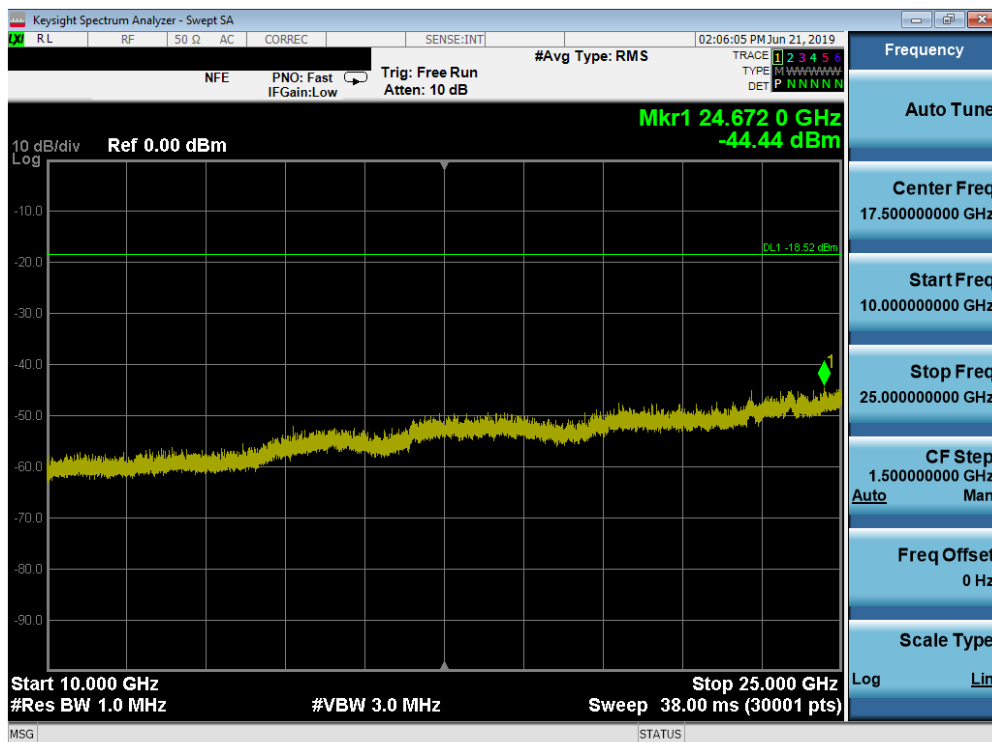


Plot 7-89. Conducted Spurious Plot SISO ANT2 (802.11b – Ch. 6)

|                                         |                                              |                              |  |                                 |
|-----------------------------------------|----------------------------------------------|------------------------------|--|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                              |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019               | EUT Type:<br>Portable Tablet |  | Page 69 of 108                  |

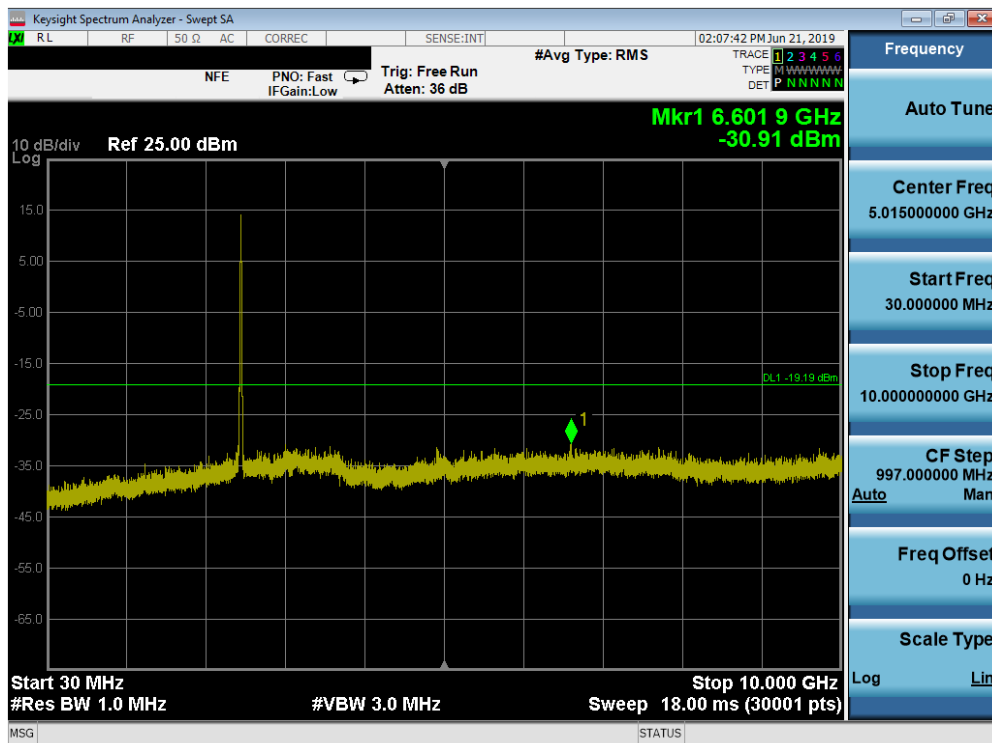

Plot 7-90. Conducted Spurious Plot SISO ANT2 (802.11b – Ch. 11)

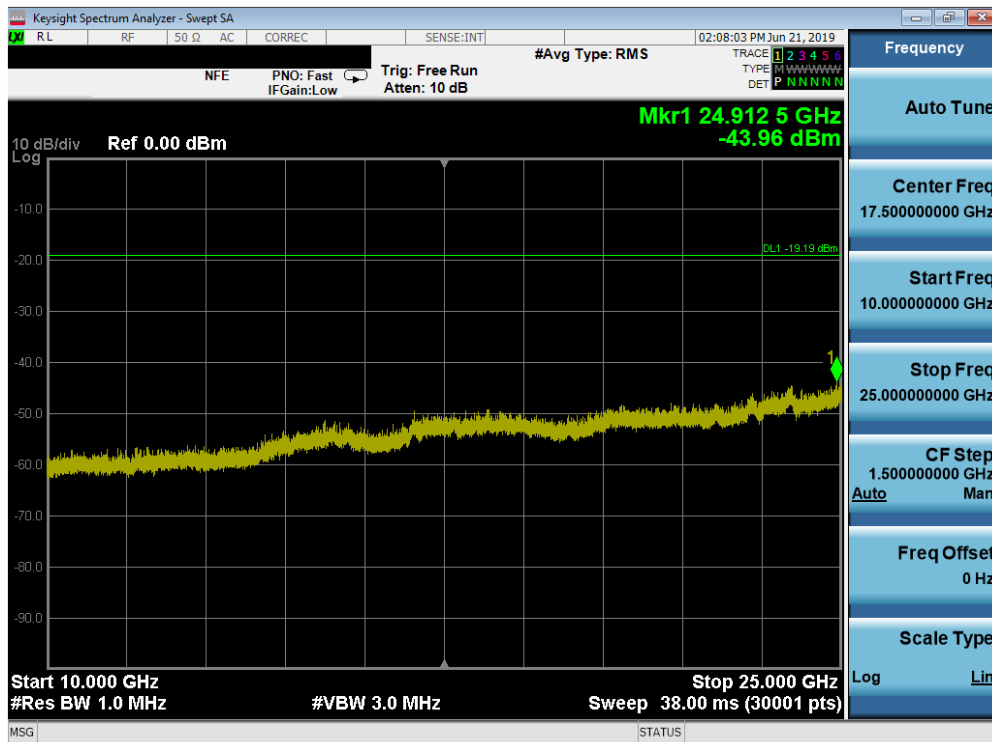

Plot 7-91. Conducted Spurious Plot SISO ANT2 (802.11b – Ch. 11)

|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 70 of 108                  |

## 7.7 Radiated Spurious Emission Measurements – Above 1 GHz

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-11 per Section 15.209 and RSS-Gen (8.9).***

| Frequency       | Field Strength<br>[ $\mu\text{V/m}$ ] | Measured Distance<br>[Meters] |
|-----------------|---------------------------------------|-------------------------------|
| Above 960.0 MHz | 500                                   | 3                             |

**Table 7-11. Radiated Limits**

### Test Procedures Used

ANSI C63.10-2013 – Section 6.6.4.3

KDB 558074 D01 v05r02 – Sections 8.6, 8.7

### Test Settings

#### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be  $\geq 2 \times \text{span/RBW}$ )
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces


#### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

|                                         |                                                                                     |                                       |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  | MEASUREMENT REPORT<br>(CERTIFICATION) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                      | EUT Type:<br>Portable Tablet          |                                                                                       | Page 71 of 108                  |

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

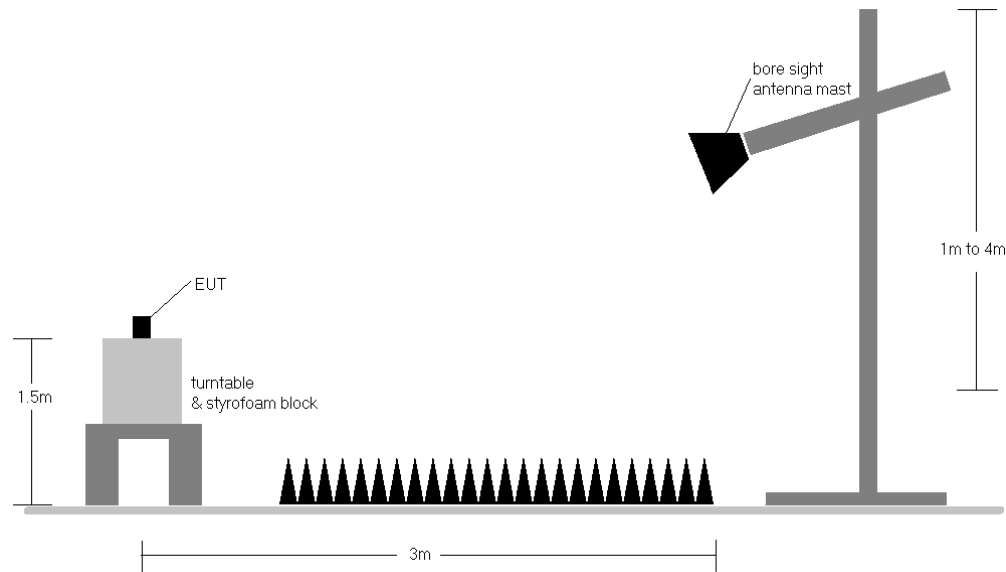

**Figure 7-6. Test Instrument & Measurement Setup**

## Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 558074 D01 v05r02 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in Section 15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-11.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. Radiated spurious emissions were investigated while operating in MIMO mode, however, it was determined that single antenna operation produced the worst case emissions. Since the emissions

|                                         |                                                                                     |                                       |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  | MEASUREMENT REPORT<br>(CERTIFICATION) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                      | EUT Type:<br>Portable Tablet          |                                                                                       | Page 72 of 108                  |

produced from MIMO operation were found to be more than 20dB below the limit, the MIMO emissions are not reported.

8. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
9. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

## **Sample Calculations**

### **Determining Spurious Emissions Levels**

- o Field Strength Level  $[\text{dB}\mu\text{V/m}] = \text{Analyzer Level} [\text{dBm}] + 107 + \text{AFCL} [\text{dB/m}]$
- o  $\text{AFCL} [\text{dB/m}] = \text{Antenna Factor} [\text{dB/m}] + \text{Cable Loss} [\text{dB}]$
- o  $\text{Margin} [\text{dB}] = \text{Field Strength Level} [\text{dB}\mu\text{V/m}] - \text{Limit} [\text{dB}\mu\text{V/m}]$


### **Radiated Band Edge Measurement Offset**

- o The amplitude offset shown in the radiated restricted band edge plots in Section 7.7 was calculated using the formula:  
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain


|                                         |                                                                                     |                                       |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  | MEASUREMENT REPORT<br>(CERTIFICATION) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                      | EUT Type:<br>Portable Tablet          | Page 73 of 108                                                                        |                                 |

## 7.7.1 SISO Antenna-1 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

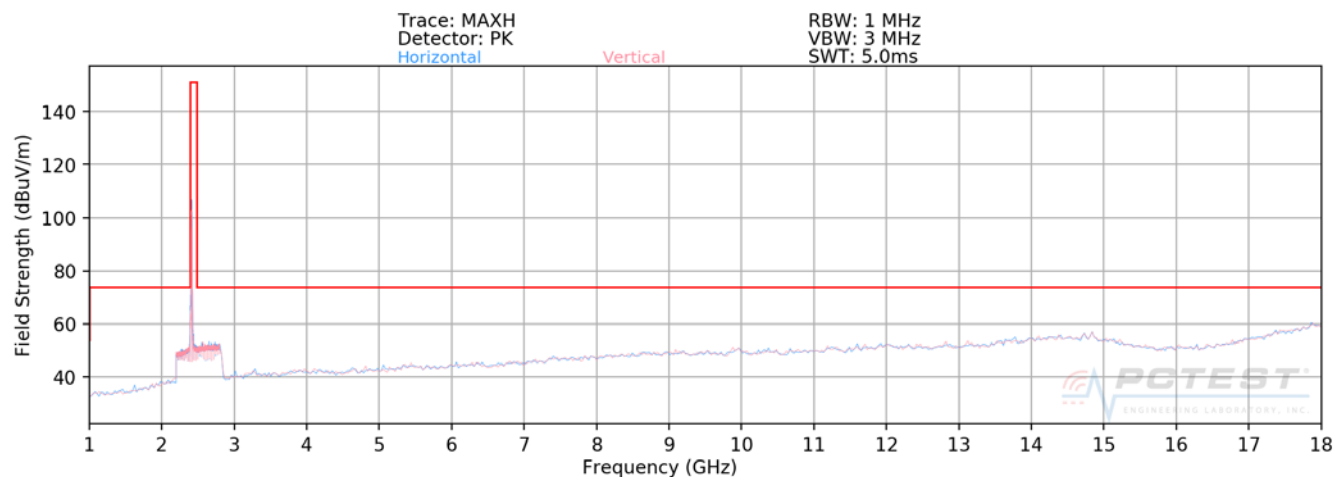


Plot 7-92. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11b – Ch. 1)

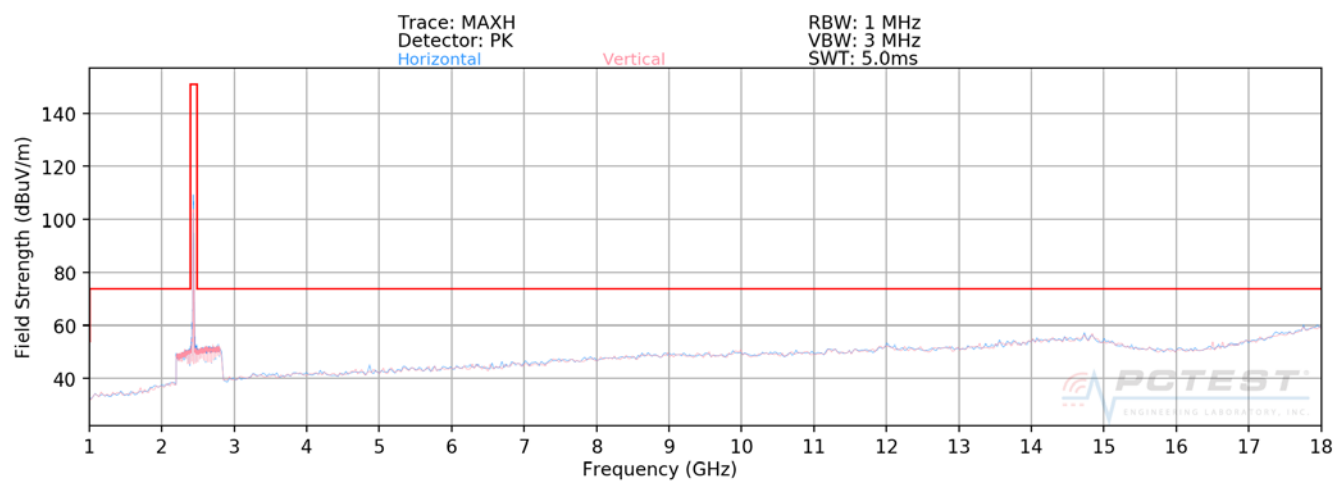

Plot 7-93. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11b – Ch. 6)


|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 74 of 108                  |

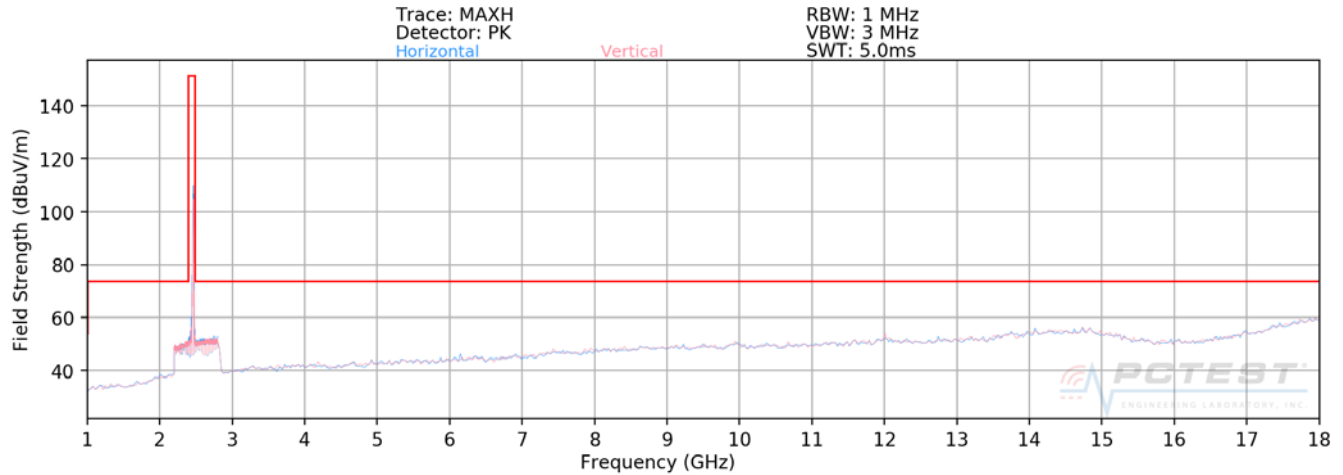

**Plot 7-94. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11b – Ch. 11)**

|                                         |                                              |                              |  |                                 |
|-----------------------------------------|----------------------------------------------|------------------------------|--|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                              |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019               | EUT Type:<br>Portable Tablet |  | Page 75 of 108                  |

# **SISO Antenna-1 Radiated Spurious Emissions Measurements (Above 18GHz)** **§15.209; RSS-Gen [8.9]**

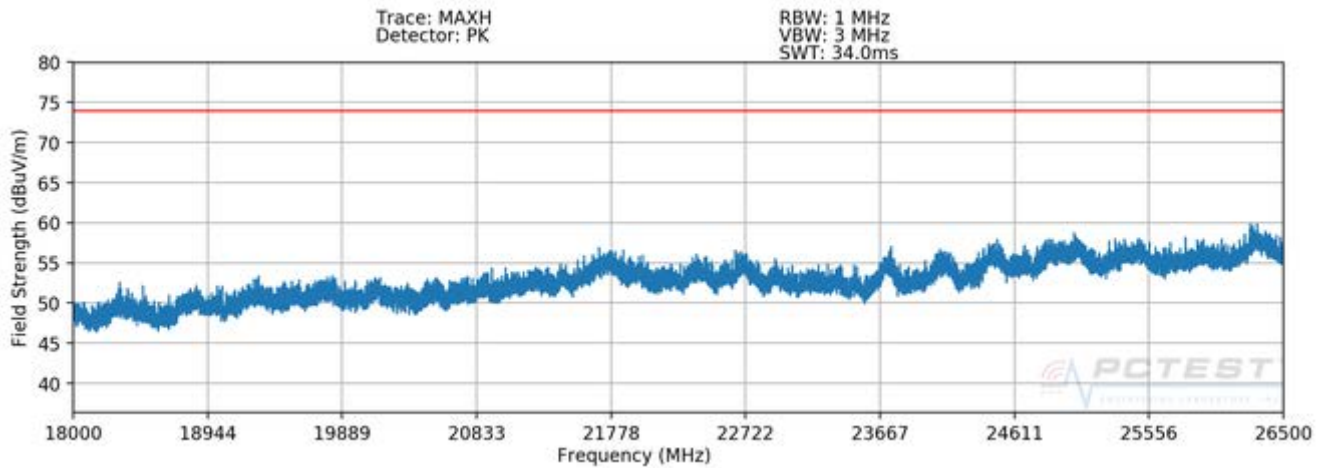

**Plot 7-95. Radiated Spurious Plot above 18GHz SISO ANT1**

|                                         |                                                                                     |                                       |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  | MEASUREMENT REPORT<br>(CERTIFICATION) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                      | EUT Type:<br>Portable Tablet          |                                                                                       | Page 76 of 108                  |

## SISO Antenna-1 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11b  
Worst Case Transfer Rate: 1 Mbps  
Distance of Measurements: 3 Meters  
Operating Frequency: 2412MHz  
Channel: 01

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 4824.00         | Avg      | H               | 114                 | 288                        | -71.21               | 7.06        | 42.85                   | 53.98          | -11.13      |
| 4824.00         | Peak     | H               | 114                 | 288                        | -64.77               | 7.06        | 49.29                   | 73.98          | -24.69      |
| 12060.00        | Avg      | H               | -                   | -                          | -81.23               | 17.99       | 43.76                   | 53.98          | -10.22      |
| 12060.00        | Peak     | H               | -                   | -                          | -69.88               | 17.99       | 55.11                   | 73.98          | -18.87      |

Table 7-12. Radiated Measurements SISO ANT1

Worst Case Mode: 802.11b  
Worst Case Transfer Rate: 1 Mbps  
Distance of Measurements: 3 Meters  
Operating Frequency: 2437MHz  
Channel: 06

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 4874.00         | Avg      | H               | 111                 | 287                        | -72.50               | 7.46        | 41.96                   | 53.98          | -12.02      |
| 4874.00         | Peak     | H               | 111                 | 287                        | -64.52               | 7.46        | 49.94                   | 73.98          | -24.04      |
| 7311.00         | Avg      | H               | -                   | -                          | -80.10               | 12.07       | 38.97                   | 53.98          | -15.01      |
| 7311.00         | Peak     | H               | -                   | -                          | -68.41               | 12.07       | 50.66                   | 73.98          | -23.32      |
| 12185.00        | Avg      | H               | -                   | -                          | -81.35               | 18.70       | 44.35                   | 53.98          | -9.63       |
| 12185.00        | Peak     | H               | -                   | -                          | -69.82               | 18.70       | 55.88                   | 73.98          | -18.10      |

Table 7-13. Radiated Measurements SISO ANT1

|                                         |                                                                                     |                                       |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  | MEASUREMENT REPORT<br>(CERTIFICATION) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                      | EUT Type:<br>Portable Tablet          |                                                                                       | Page 77 of 108                  |

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11


| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 4924.00         | Avg      | H               | 114                 | 298                        | -70.49               | 7.08        | 43.59                   | 53.98          | -10.39      |
| 4924.00         | Peak     | H               | 114                 | 298                        | -62.54               | 7.08        | 51.54                   | 73.98          | -22.44      |
| 7386.00         | Avg      | H               | -                   | -                          | -78.03               | 11.90       | 40.87                   | 53.98          | -13.11      |
| 7386.00         | Peak     | H               | -                   | -                          | -67.80               | 11.90       | 51.10                   | 73.98          | -22.88      |
| 12310.00        | Avg      | H               | -                   | -                          | -81.17               | 18.75       | 44.58                   | 53.98          | -9.40       |
| 12310.00        | Peak     | H               | -                   | -                          | -70.13               | 18.75       | 55.62                   | 73.98          | -18.36      |

**Table 7-14. Radiated Measurements SISO ANT1**


|                                         |                                                                                     |                                       |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  | MEASUREMENT REPORT<br>(CERTIFICATION) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                      | EUT Type:<br>Portable Tablet          |                                                                                       | Page 78 of 108                  |

## 7.7.2 SISO Antenna-2 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

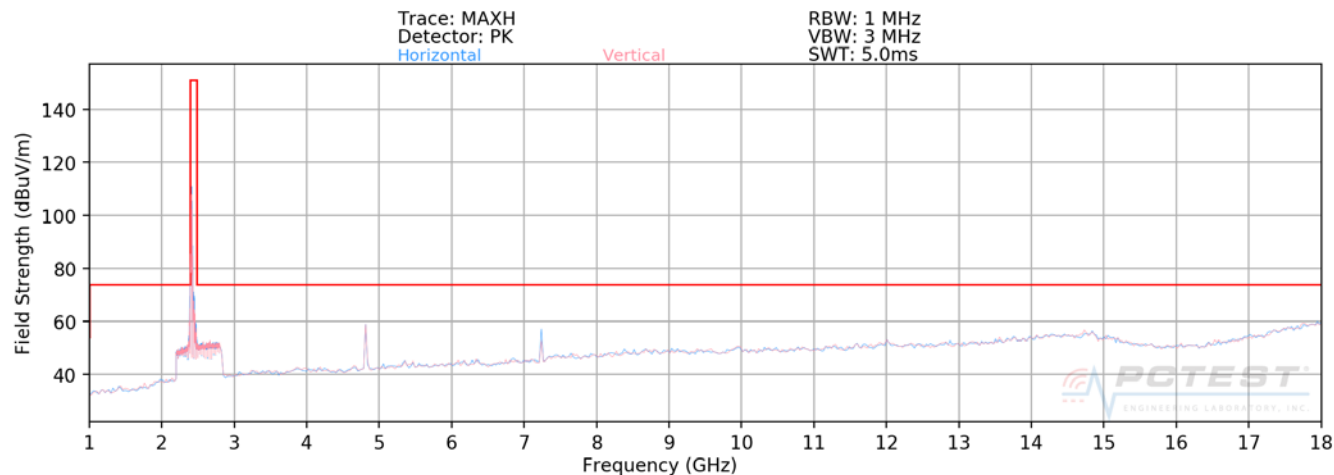


Plot 7-96. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11b – Ch. 1)

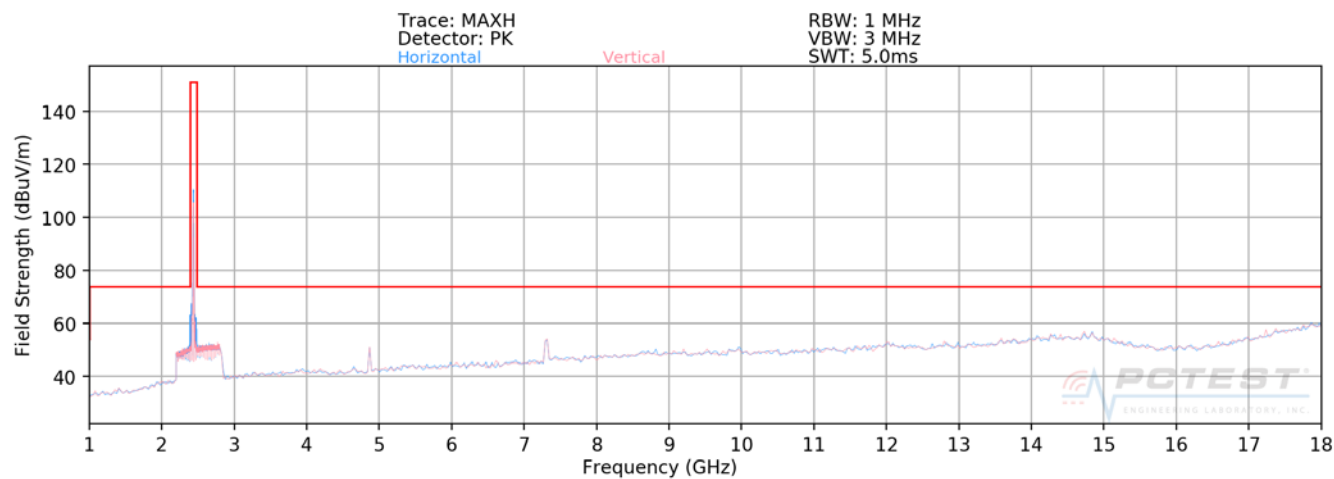

Plot 7-97. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11b – Ch. 6)

|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 79 of 108                  |

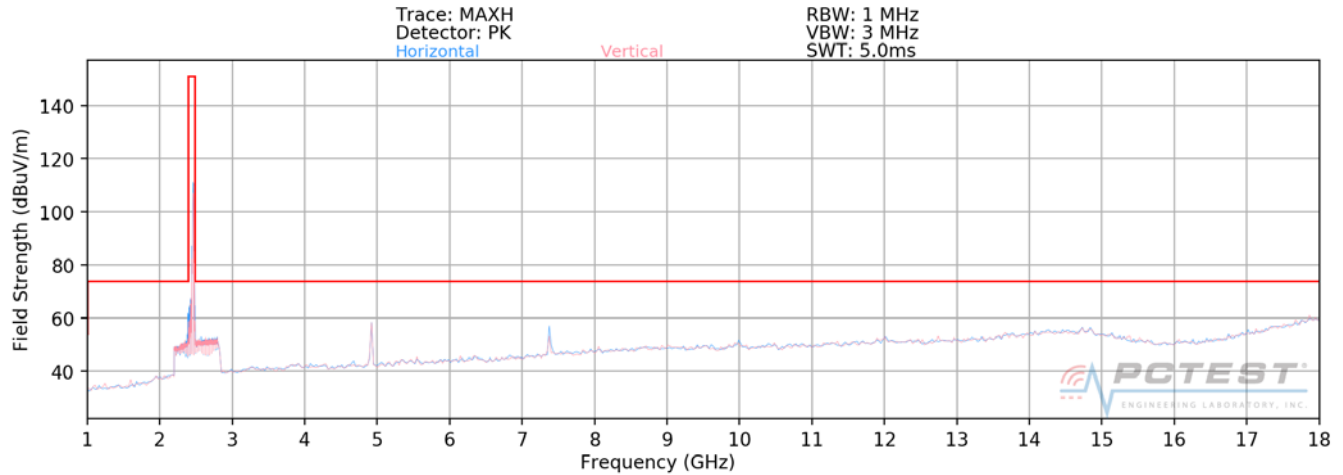


**Plot 7-98. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11b – Ch. 11)**

|                                         |                                               |                              |  |                                 |
|-----------------------------------------|-----------------------------------------------|------------------------------|--|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                              |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet |  | Page 80 of 108                  |

## SISO Antenna-2 Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209; RSS-Gen [8.9]

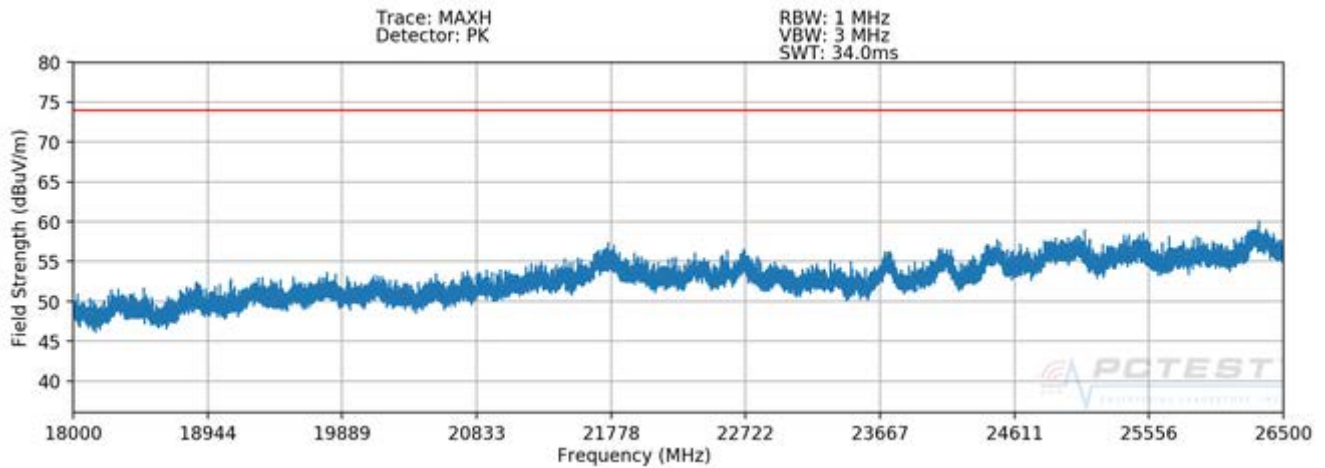

Plot 7-99. Radiated Spurious Plot above 18GHz SISO ANT2

|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 81 of 108                  |

## SISO Antenna-2 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11b  
Worst Case Transfer Rate: 1 Mbps  
Distance of Measurements: 3 Meters  
Operating Frequency: 2412MHz  
Channel: 01

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 4824.00         | Avg      | H               | 182                 | 251                        | -68.41               | 7.06        | 45.65                   | 53.98          | -8.33       |
| 4824.00         | Peak     | H               | 182                 | 251                        | -61.66               | 7.06        | 52.40                   | 73.98          | -21.58      |
| 12060.00        | Avg      | H               | -                   | -                          | -81.13               | 17.99       | 43.86                   | 53.98          | -10.12      |
| 12060.00        | Peak     | H               | -                   | -                          | -70.20               | 17.99       | 54.79                   | 73.98          | -19.19      |

Table 7-15. Radiated Measurements SISO ANT2

Worst Case Mode: 802.11b  
Worst Case Transfer Rate: 1 Mbps  
Distance of Measurements: 3 Meters  
Operating Frequency: 2437MHz  
Channel: 06

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 4874.00         | Avg      | H               | 184                 | 244                        | -68.53               | 7.46        | 45.93                   | 53.98          | -8.05       |
| 4874.00         | Peak     | H               | 184                 | 244                        | -65.25               | 7.46        | 49.21                   | 73.98          | -24.77      |
| 7311.00         | Avg      | H               | 117                 | 283                        | -71.82               | 12.07       | 47.25                   | 53.98          | -6.73       |
| 7311.00         | Peak     | H               | 117                 | 283                        | -65.96               | 12.07       | 53.11                   | 73.98          | -20.87      |
| 12185.00        | Avg      | H               | -                   | -                          | -81.42               | 18.70       | 44.28                   | 53.98          | -9.70       |
| 12185.00        | Peak     | H               | -                   | -                          | -70.51               | 18.70       | 55.19                   | 73.98          | -18.79      |

Table 7-16. Radiated Measurements SISO ANT2

|                                         |                                                                                     |                                       |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  | MEASUREMENT REPORT<br>(CERTIFICATION) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04-A3L | Test Dates:<br>6/7 - 7/22/2019                                                      | EUT Type:<br>Portable Tablet          |                                                                                       | Page 82 of 108                  |

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11


| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 4924.00         | Avg      | H               | 214                 | 243                        | -69.25               | 7.08        | 44.83                   | 53.98          | -9.15       |
| 4924.00         | Peak     | H               | 214                 | 243                        | -67.27               | 7.08        | 46.81                   | 73.98          | -27.17      |
| 7386.00         | Avg      | H               | 112                 | 284                        | -71.28               | 11.90       | 47.62                   | 53.98          | -6.36       |
| 7386.00         | Peak     | H               | 112                 | 284                        | -65.35               | 11.90       | 53.55                   | 73.98          | -20.43      |
| 12310.00        | Avg      | H               | -                   | -                          | -81.34               | 18.75       | 44.41                   | 53.98          | -9.57       |
| 12310.00        | Peak     | H               | -                   | -                          | -70.75               | 18.75       | 55.00                   | 73.98          | -18.98      |

**Table 7-17. Radiated Measurements SISO ANT2**


|                                         |                                                                                     |                                       |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  | MEASUREMENT REPORT<br>(CERTIFICATION) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                      | EUT Type:<br>Portable Tablet          |                                                                                       | Page 83 of 108                  |

### 7.7.3 MIMO/CDD Radiated Spurious Emission Measurements


§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

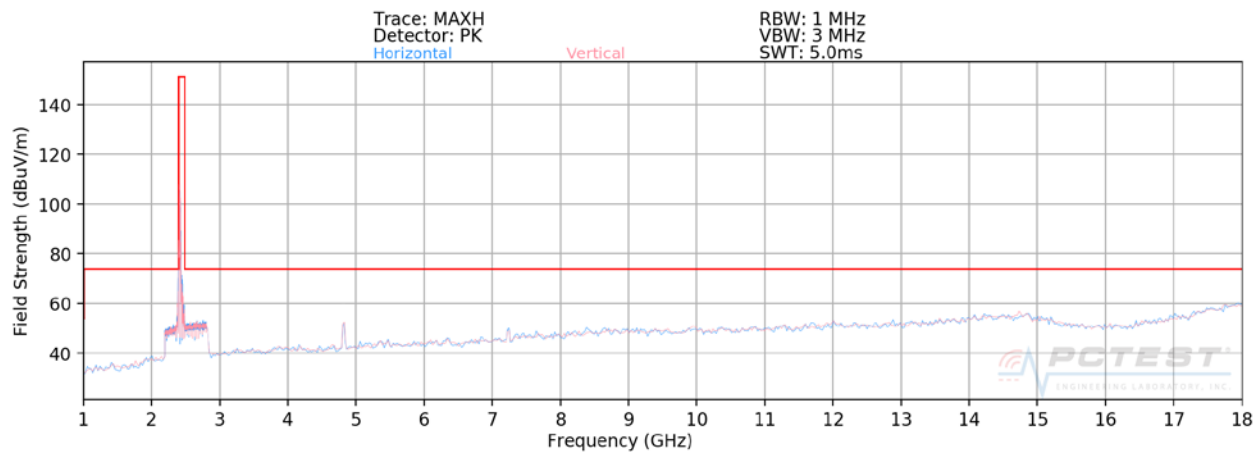

Plot 7-100. Radiated Spurious Plot above 1GHz MIMO/CDD (802.11g – Ch. 1)

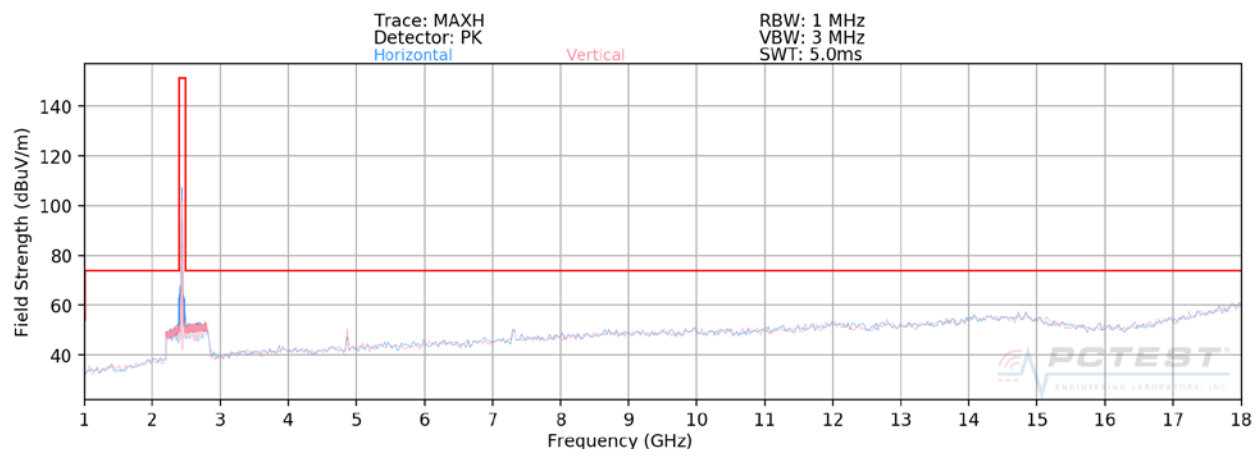


Plot 7-101. Radiated Spurious Plot above 1GHz MIMO/CDD (802.11g – Ch. 6)

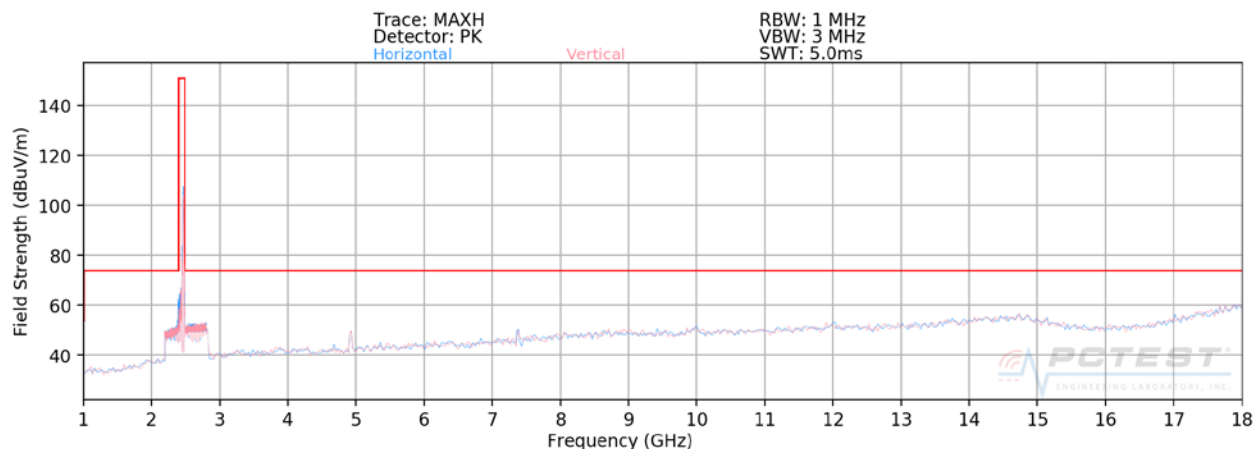

Plot 7-102. Radiated Spurious Plot above 1GHz MIMO/CDD (802.11g – Ch. 11)

|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 84 of 108                  |

# **MIMO/CDD Radiated Spurious Emissions Measurements (Above 18GHz)** **§15.209; RSS-Gen [8.9]**

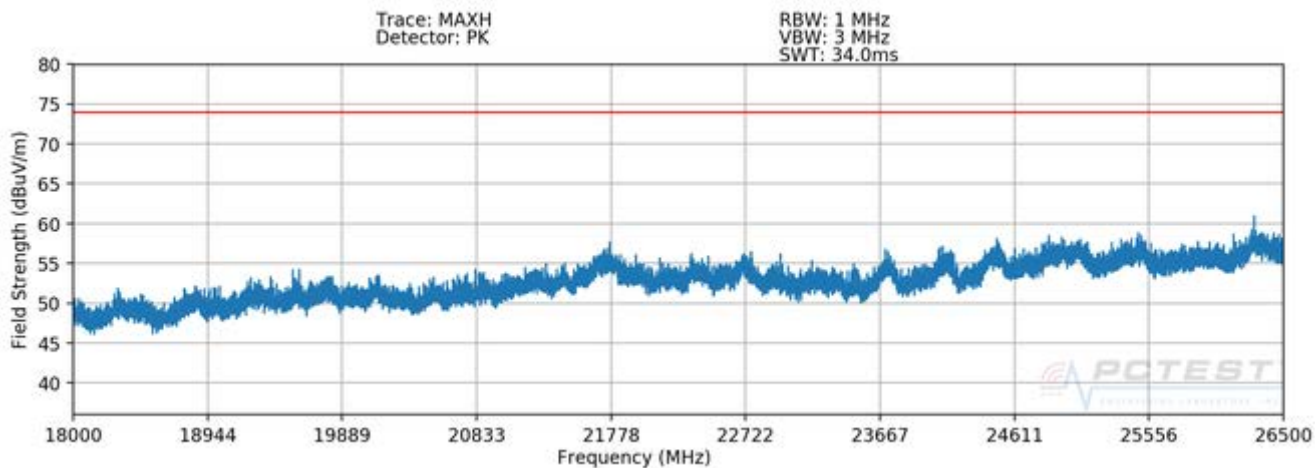

**Plot 7-103. Radiated Spurious Plot above 18GHz MIMO/CDD**

|                                         |                                                                                                                                                                                                                         |                              |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b>  |                              | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                                                                                                                                                          | EUT Type:<br>Portable Tablet | Page 85 of 108                  |

## MIMO/CDD Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11g  
Worst Case Transfer Rate: 6 Mbps  
Distance of Measurements: 3 Meters  
Operating Frequency: 2412MHz  
Channel: 01

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 4824.00         | Avg      | H               | 201                 | 245                        | -66.38               | 7.06        | 47.68                   | 53.98          | -6.30       |
| 4824.00         | Peak     | H               | 201                 | 245                        | -52.02               | 7.06        | 62.04                   | 73.98          | -11.94      |
| 12060.00        | Avg      | H               | -                   | -                          | -85.22               | 17.99       | 39.77                   | 53.98          | -14.21      |
| 12060.00        | Peak     | H               | -                   | -                          | -72.53               | 17.99       | 52.46                   | 73.98          | -21.52      |

Table 7-18. Radiated Measurements MIMO/CDD

Worst Case Mode: 802.11g  
Worst Case Transfer Rate: 6 Mbps  
Distance of Measurements: 3 Meters  
Operating Frequency: 2437MHz  
Channel: 06

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 4874.00         | Avg      | H               | 179                 | 243                        | -72.17               | 7.46        | 42.29                   | 53.98          | -11.69      |
| 4874.00         | Peak     | H               | 179                 | 243                        | -57.13               | 7.46        | 57.33                   | 73.98          | -16.65      |
| 7311.00         | Avg      | H               | 113                 | 285                        | -72.61               | 12.07       | 46.46                   | 53.98          | -7.52       |
| 7311.00         | Peak     | H               | 113                 | 285                        | -57.06               | 12.07       | 62.01                   | 73.98          | -11.97      |
| 12185.00        | Avg      | H               | -                   | -                          | -85.42               | 18.70       | 40.28                   | 53.98          | -13.70      |
| 12185.00        | Peak     | H               | -                   | -                          | -71.90               | 18.70       | 53.80                   | 73.98          | -20.18      |

Table 7-19. Radiated Measurements MIMO/CDD

|                                         |                                                                                                                                                                                                                     |                              |                                 |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  <b>MEASUREMENT REPORT (CERTIFICATION)</b>  |                              | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04-A3L | Test Dates:<br>6/7 - 7/22/2019                                                                                                                                                                                      | EUT Type:<br>Portable Tablet | Page 86 of 108                  |

Worst Case Mode: 802.11g  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 4924.00         | Avg      | H               | 193                 | 243                        | -67.76               | 7.08        | 46.32                   | 53.98          | -7.66       |
| 4924.00         | Peak     | H               | 193                 | 243                        | -53.01               | 7.08        | 61.07                   | 73.98          | -12.91      |
| 7386.00         | Avg      | H               | 115                 | 285                        | -71.46               | 11.90       | 47.44                   | 53.98          | -6.54       |
| 7386.00         | Peak     | H               | 115                 | 285                        | -55.29               | 11.90       | 63.61                   | 73.98          | -10.37      |
| 12310.00        | Avg      | H               | -                   | -                          | -85.52               | 18.75       | 40.23                   | 53.98          | -13.75      |
| 12310.00        | Peak     | H               | -                   | -                          | -72.57               | 18.75       | 53.18                   | 73.98          | -20.80      |

**Table 7-20. Radiated Measurements MIMO/CDD**


|                                         |                                                                                     |                                       |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  | MEASUREMENT REPORT<br>(CERTIFICATION) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                      | EUT Type:<br>Portable Tablet          |                                                                                       | Page 87 of 108                  |

## 7.7.4 SISO Antenna-1 Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11n  |
| Worst Case Transfer Rate: | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 2412MHz  |
| Channel:                  | 1        |

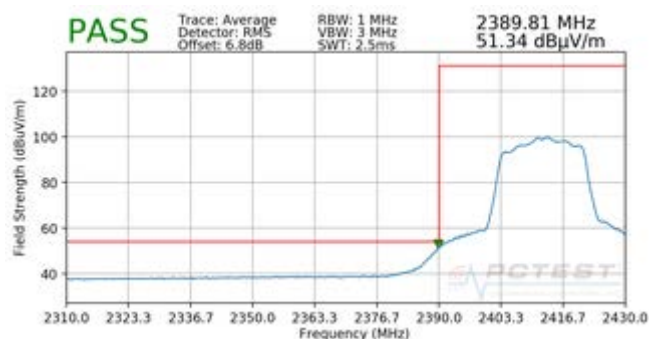


**Plot 7-104. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Average)**




**Plot 7-105. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Peak)**

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11n  |
| Worst Case Transfer Rate: | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 2417MHz  |
| Channel:                  | 2        |

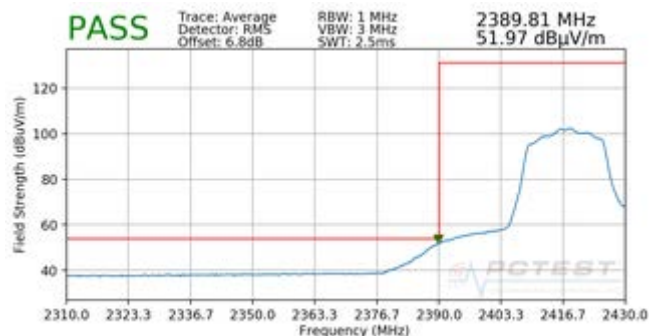


**Plot 7-106. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Average)**

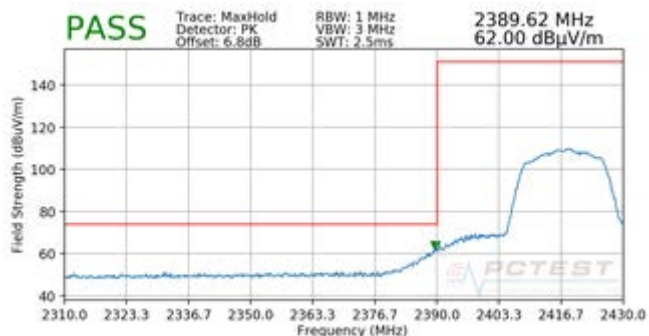


**Plot 7-107. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Peak)**

|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04-A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 88 of 108                  |

Worst Case Mode: 802.11n  
Worst Case Transfer Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 2422MHz  
Channel: 3

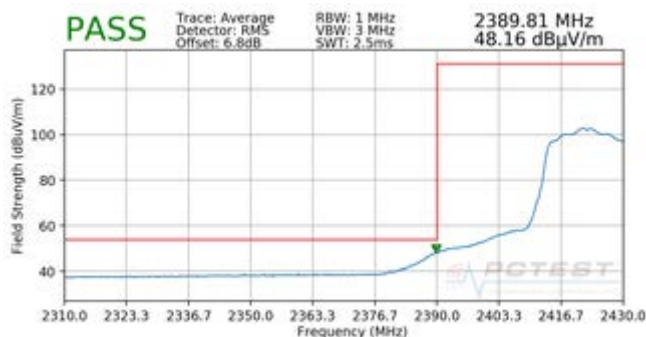

**Plot 7-108. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Average)**

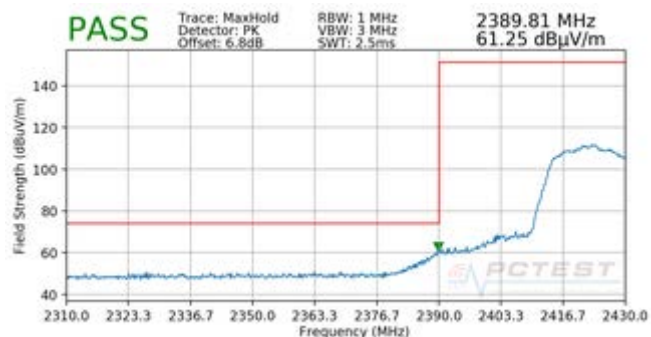


**Plot 7-109. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Peak)**

Worst Case Mode: 802.11n  
Worst Case Transfer Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 2447MHz  
Channel: 8



**Plot 7-110. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average)**

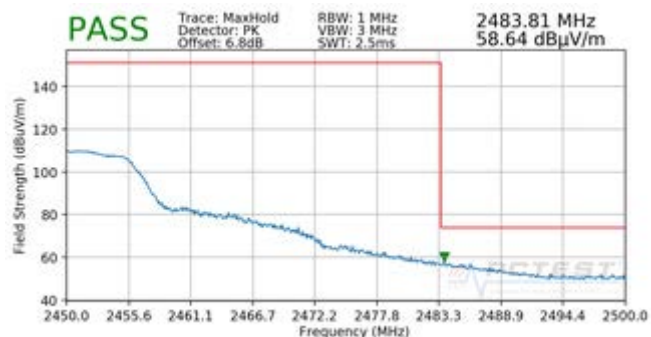


**Plot 7-111. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak)**

|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 89 of 108                  |

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11n  |
| Worst Case Transfer Rate: | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 2452MHz  |
| Channel:                  | 9        |



**Plot 7-112. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average)**

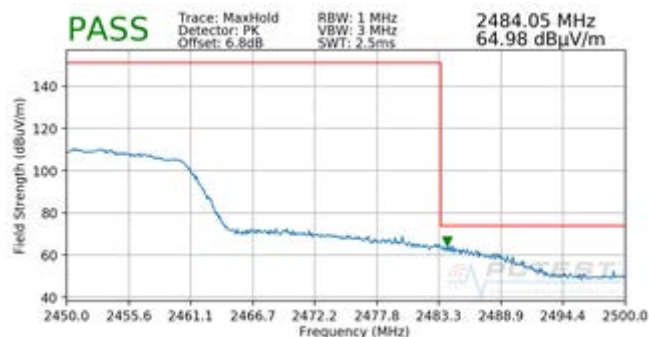


**Plot 7-113. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak)**

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11n  |
| Worst Case Transfer Rate: | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 2457MHz  |
| Channel:                  | 10       |



**Plot 7-114. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average)**

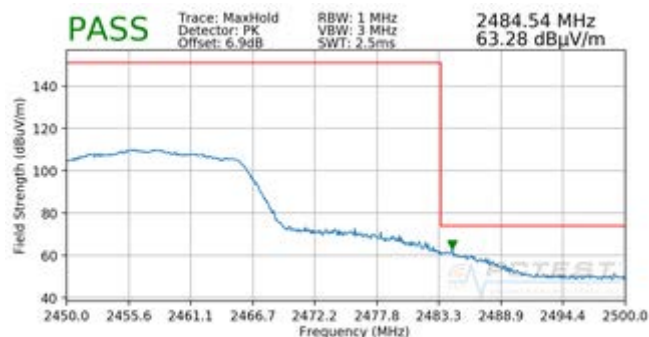


**Plot 7-115. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak)**

|                                         |                                              |                              |                |                                 |
|-----------------------------------------|----------------------------------------------|------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                              |                | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019               | EUT Type:<br>Portable Tablet | Page 90 of 108 |                                 |

Worst Case Mode: 802.11g  
Worst Case Transfer Rate: 6Mbps  
Distance of Measurements: 3 Meters  
Operating Frequency: 2462MHz  
Channel: 11



**Plot 7-116. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average)**

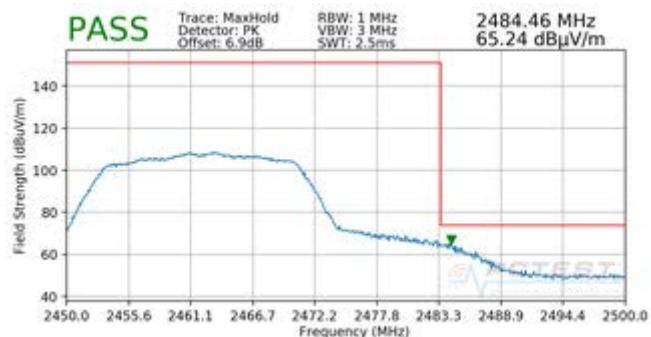


**Plot 7-117. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak)**

Worst Case Mode: 802.11g  
Worst Case Transfer Rate: 6Mbps  
Distance of Measurements: 3 Meters  
Operating Frequency: 2467MHz  
Channel: 12




**Plot 7-118. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average)**

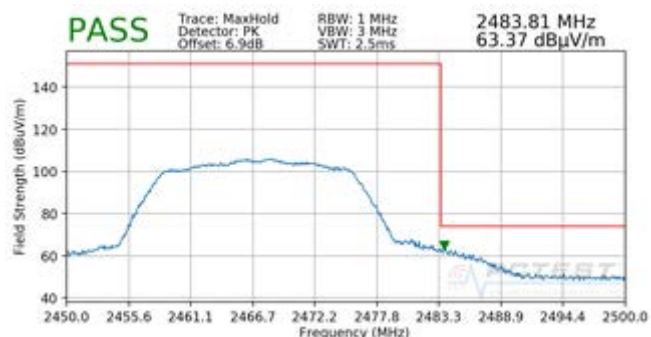


**Plot 7-119. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak)**

|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 91 of 108                  |

Worst Case Mode: 802.11n  
Worst Case Transfer Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 2472MHz  
Channel: 13

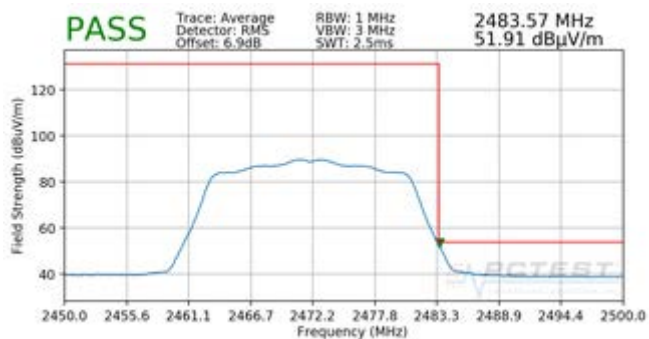

**Plot 7-120. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average)**

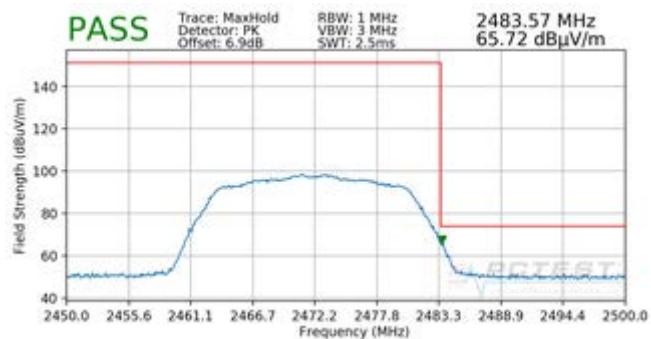

**Plot 7-121. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak)**


|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 92 of 108                  |

## 7.7.5 SISO Antenna-2 Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11g  |
| Worst Case Transfer Rate: | 6Mbps    |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 2412MHz  |
| Channel:                  | 1        |

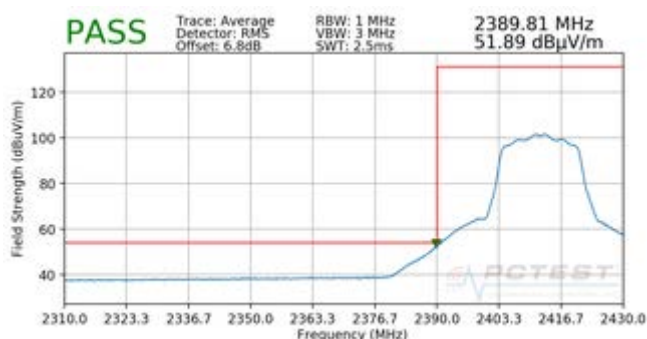


Plot 7-122. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Average)




Plot 7-123. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Peak)

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11g  |
| Worst Case Transfer Rate: | 6Mbps    |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 2417MHz  |
| Channel:                  | 2        |

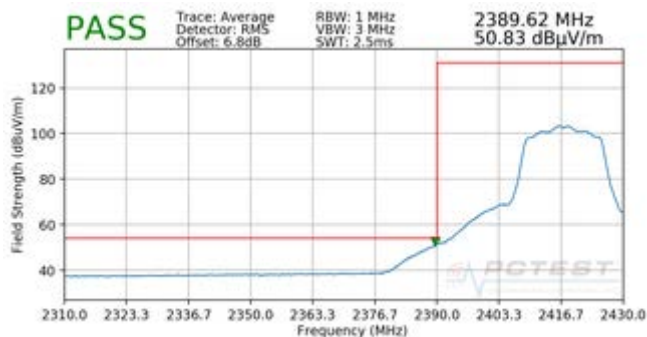

Plot 7-124. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Average)

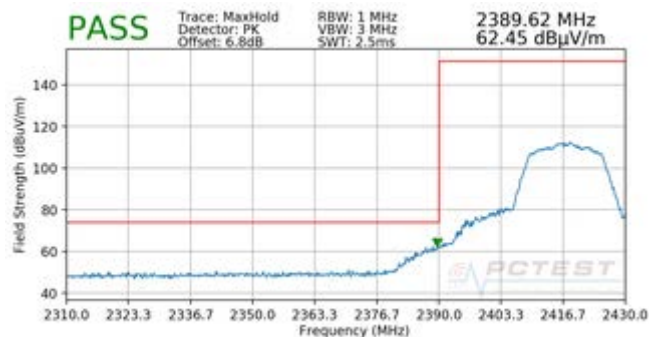


Plot 7-125. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Peak)

|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 93 of 108                  |

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11g  |
| Worst Case Transfer Rate: | 6Mbps    |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 2457MHz  |
| Channel:                  | 10       |



**Plot 7-126. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average)**

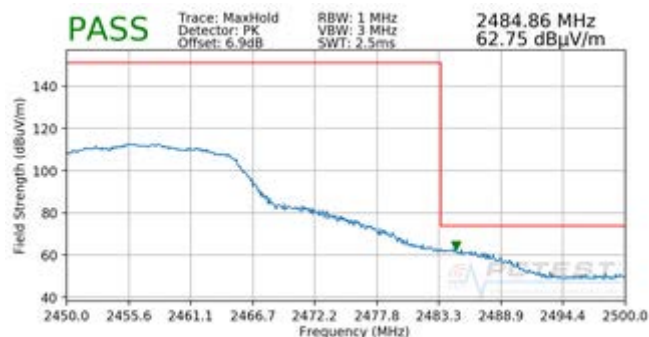


**Plot 7-127. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak)**

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11g  |
| Worst Case Transfer Rate: | 6Mbps    |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 2462MHz  |
| Channel:                  | 11       |



**Plot 7-128. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average)**

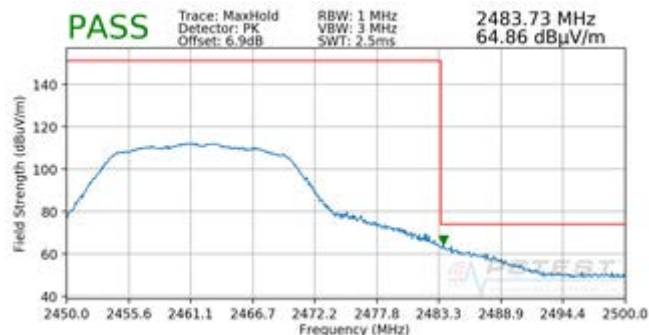


**Plot 7-129. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak)**

|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 94 of 108                  |

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11n  |
| Worst Case Transfer Rate: | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 2467MHz  |
| Channel:                  | 12       |




**Plot 7-130. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average)**

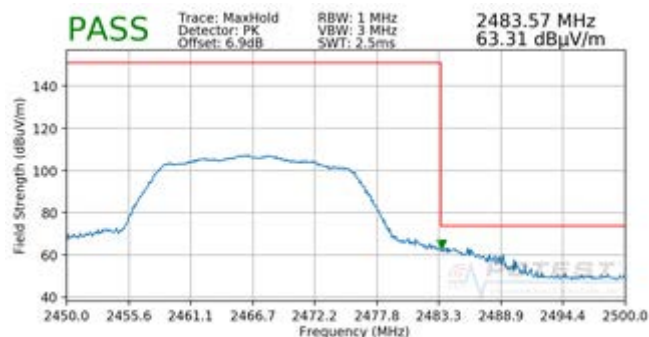


**Plot 7-131. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak)**

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11g  |
| Worst Case Transfer Rate: | 6Mbps    |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 2472MHz  |
| Channel:                  | 13       |

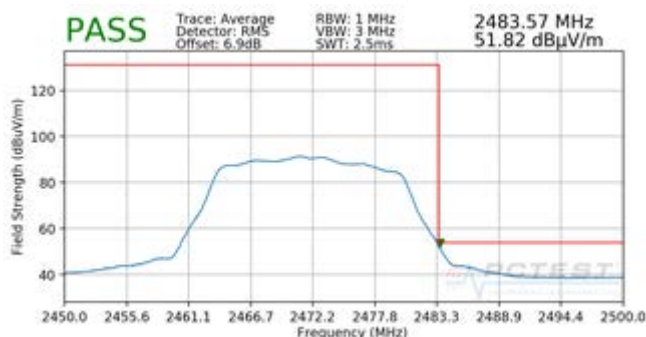

**Plot 7-132. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average)**

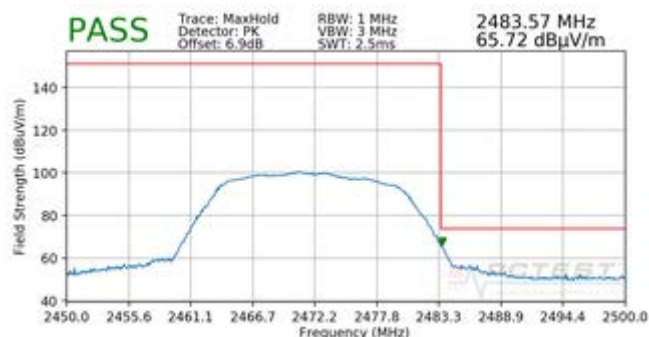

**Plot 7-133. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak)**


|                                         |                                                                                                                                   |                              |                                                                                       |                                 |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                              |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                                                                    | EUT Type:<br>Portable Tablet | Page 95 of 108                                                                        |                                 |

## 7.7.6 MIMO Radiated Restricted Band Edge Measurements


§15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11n  |
| Worst Case Transfer Rate: | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 2412MHz  |
| Channel:                  | 1        |

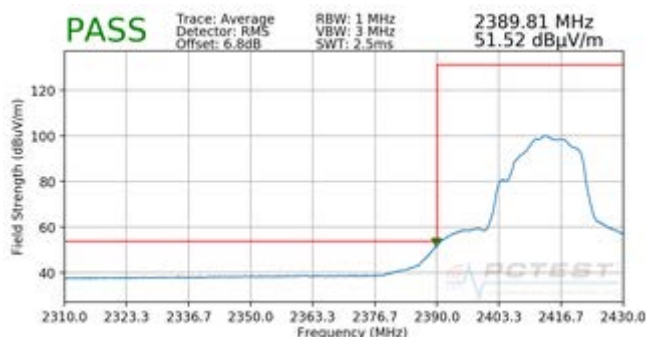


**Plot 7-134. Radiated Restricted Lower Band Edge Measurement MIMO (Average)**

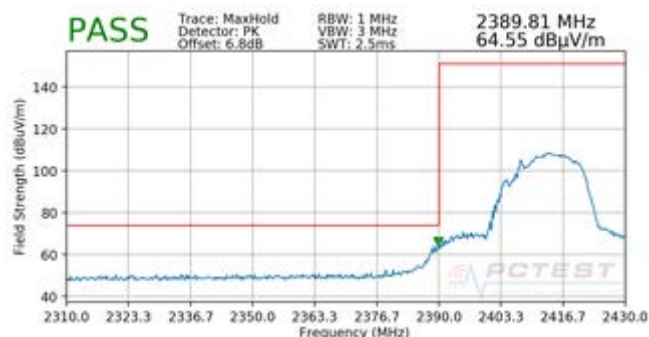


**Plot 7-135. Radiated Restricted Lower Band Edge Measurement MIMO (Peak)**

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11n  |
| Worst Case Transfer Rate: | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 2417MHz  |
| Channel:                  | 2        |

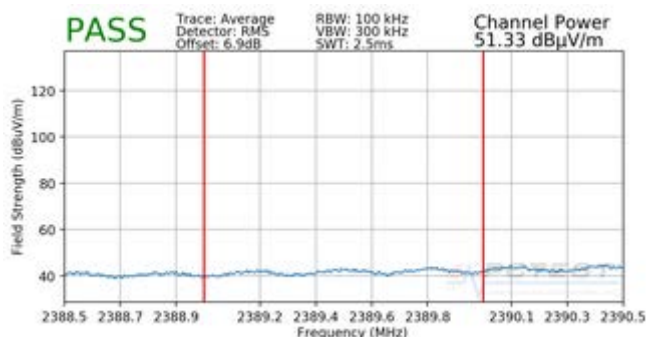


**Plot 7-136. Radiated Restricted Lower Band Edge Measurement MIMO (Average)**

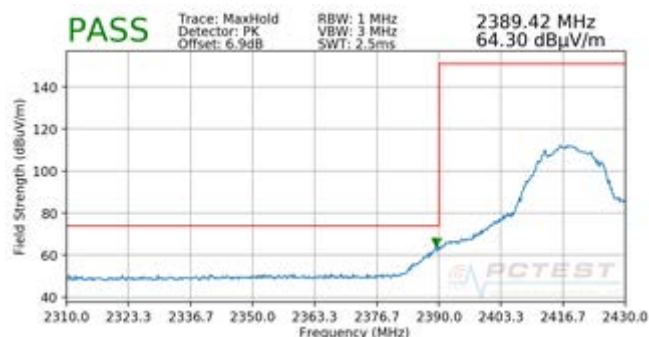


**Plot 7-137. Radiated Restricted Lower Band Edge Measurement MIMO (Peak)**

|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 96 of 108                  |

Worst Case Mode: 802.11n  
Worst Case Transfer Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 2452MHz  
Channel: 9

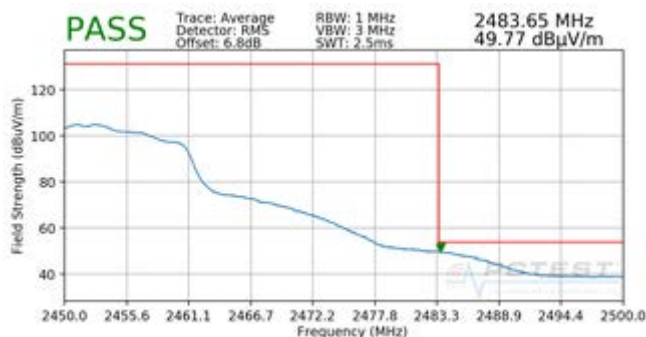


**Plot 7-138. Radiated Restricted Upper Band Edge Measurement MIMO (Average)**

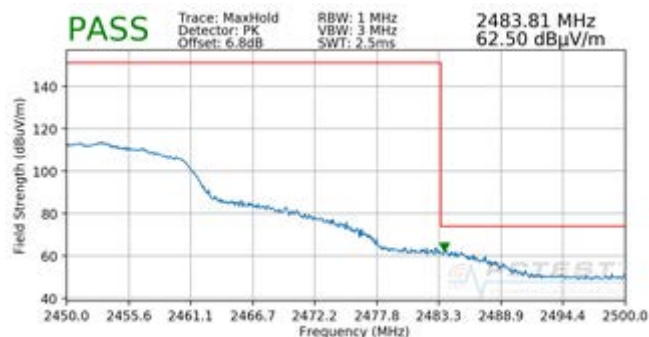


**Plot 7-139. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)**

Worst Case Mode: 802.11g  
Worst Case Transfer Rate: 6Mbps  
Distance of Measurements: 3 Meters  
Operating Frequency: 2457MHz  
Channel: 10

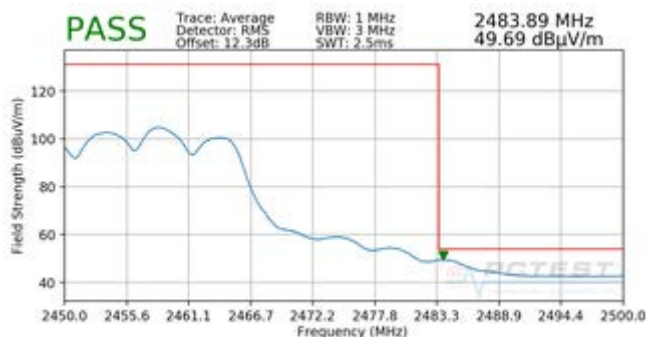


**Plot 7-140. Radiated Restricted Upper Band Edge Measurement MIMO (Average)**

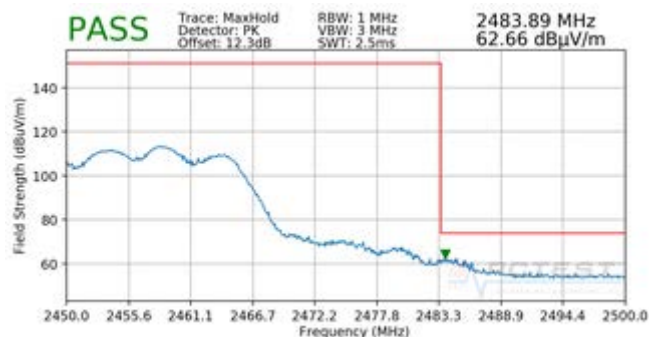


**Plot 7-141. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)**

|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 97 of 108                  |

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11g  |
| Worst Case Transfer Rate: | 6Mbps    |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 2462MHz  |
| Channel:                  | 11       |

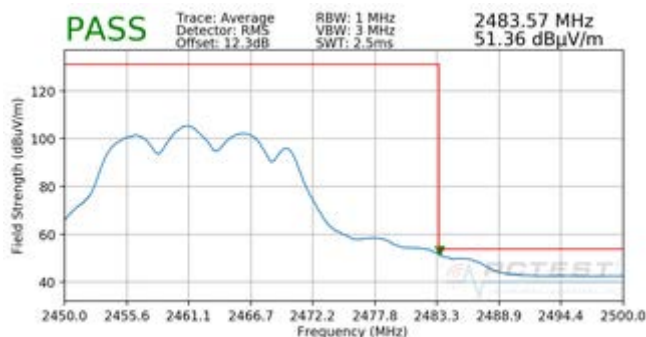

**Plot 7-142. Radiated Restricted Upper Band Edge Measurement MIMO (Average)**

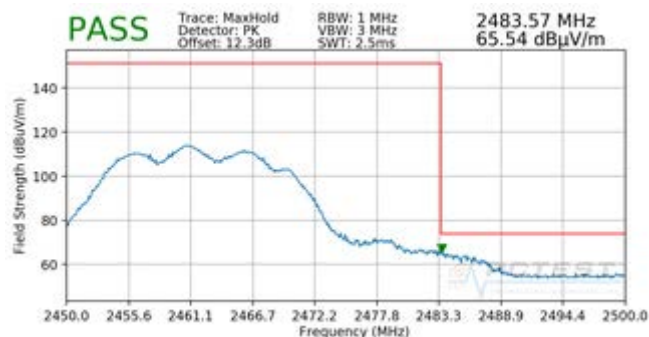


**Plot 7-143. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)**

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11g  |
| Worst Case Transfer Rate: | 6Mbps    |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 2467MHz  |
| Channel:                  | 12       |




**Plot 7-144. Radiated Restricted Upper Band Edge Measurement MIMO (Average)**

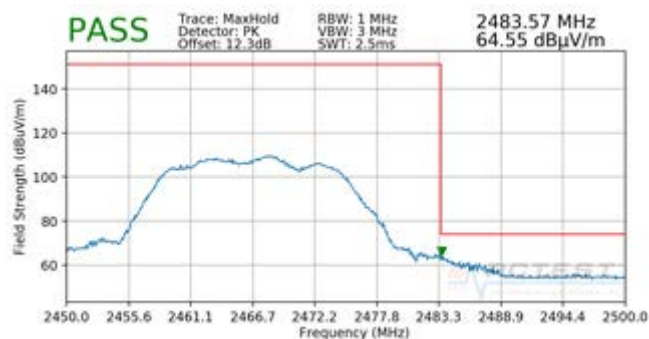


**Plot 7-145. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)**

|                                         |                                                                                                                                  |                              |                                                                                       |                                 |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                              |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                                                                   | EUT Type:<br>Portable Tablet | Page 98 of 108                                                                        |                                 |

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11g  |
| Worst Case Transfer Rate: | 6Mbps    |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 2472MHz  |
| Channel:                  | 13       |

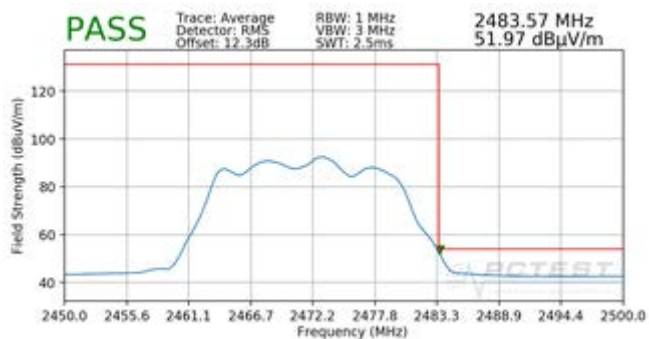

**Plot 7-146. Radiated Restricted Upper Band Edge Measurement MIMO (Average)**

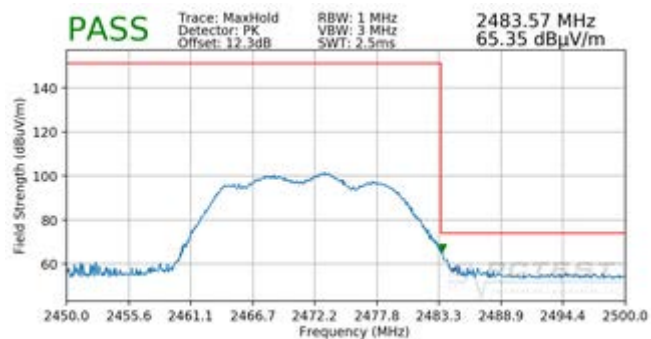

**Plot 7-147. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)**

|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04-A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 99 of 108                  |

## 7.8 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209; RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-21 per Section 15.209 and RSS-Gen (8.9).***

| Frequency         | Field Strength<br>[ $\mu\text{V/m}$ ] | Measured Distance<br>[Meters] |
|-------------------|---------------------------------------|-------------------------------|
| 0.009 – 0.490 MHz | 2400/F (kHz)                          | 300                           |
| 0.490 – 1.705 MHz | 24000/F (kHz)                         | 30                            |
| 1.705 – 30.00 MHz | 30                                    | 30                            |
| 30.00 – 88.00 MHz | 100                                   | 3                             |
| 88.00 – 216.0 MHz | 150                                   | 3                             |
| 216.0 – 960.0 MHz | 200                                   | 3                             |
| Above 960.0 MHz   | 500                                   | 3                             |

**Table 7-21. Radiated Limits**

### Test Procedures Used

ANSI C63.10-2013

### Test Settings

#### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

|                                         |                                                                                     |                                       |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  | MEASUREMENT REPORT<br>(CERTIFICATION) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                      | EUT Type:<br>Portable Tablet          | Page 100 of 108                                                                       |                                 |

## Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

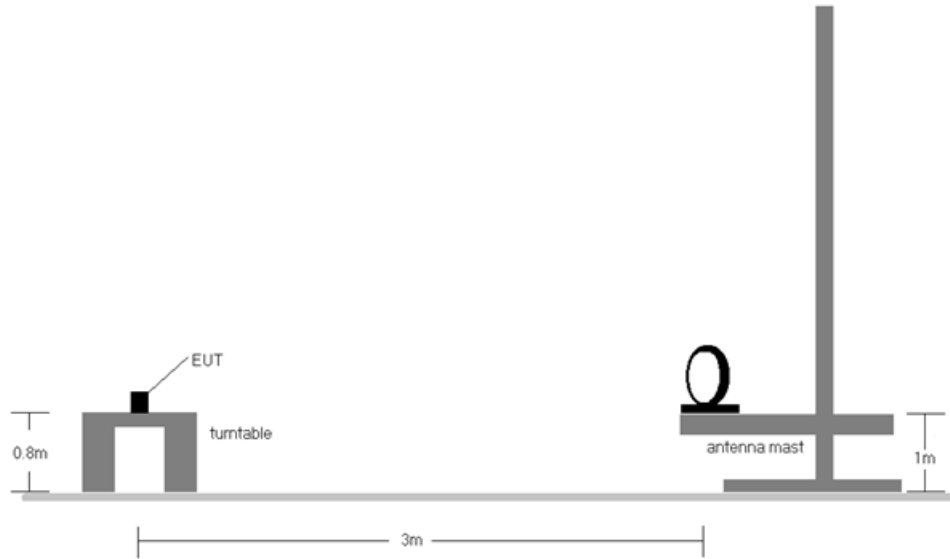


Figure 7-7. Radiated Test Setup < 30Mhz

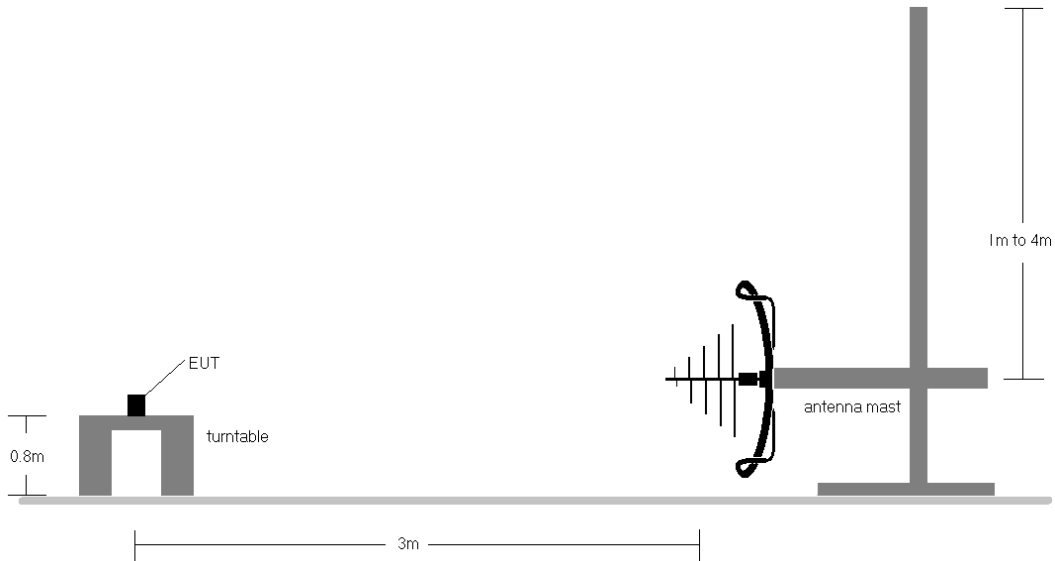


Figure 7-8. Radiated Test Setup < 1GHz

|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 101 of 108                 |


## Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen(8.10) are below the limit shown in Table 7-21.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

|                                         |                                                                                     |                                       |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  | MEASUREMENT REPORT<br>(CERTIFICATION) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                      | EUT Type:<br>Portable Tablet          | Page 102 of 108                                                                       |                                 |

# SISO Antenna-1 Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

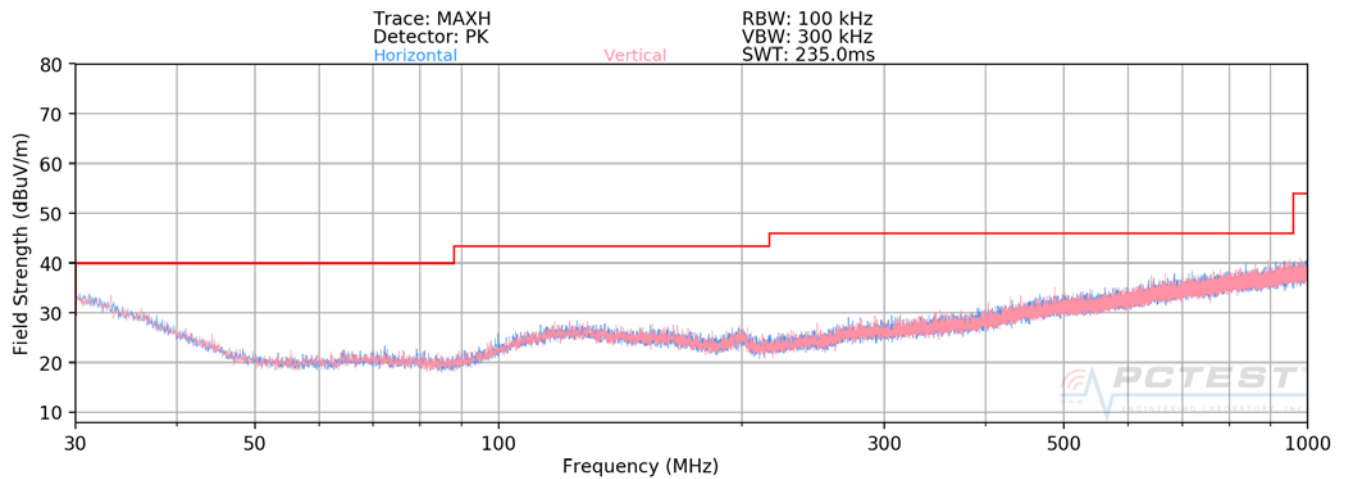


Plot 7-148. Radiated Spurious Plot below 1GHz SISO ANT1

|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 103 of 108                 |

## SISO Antenna-2 Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

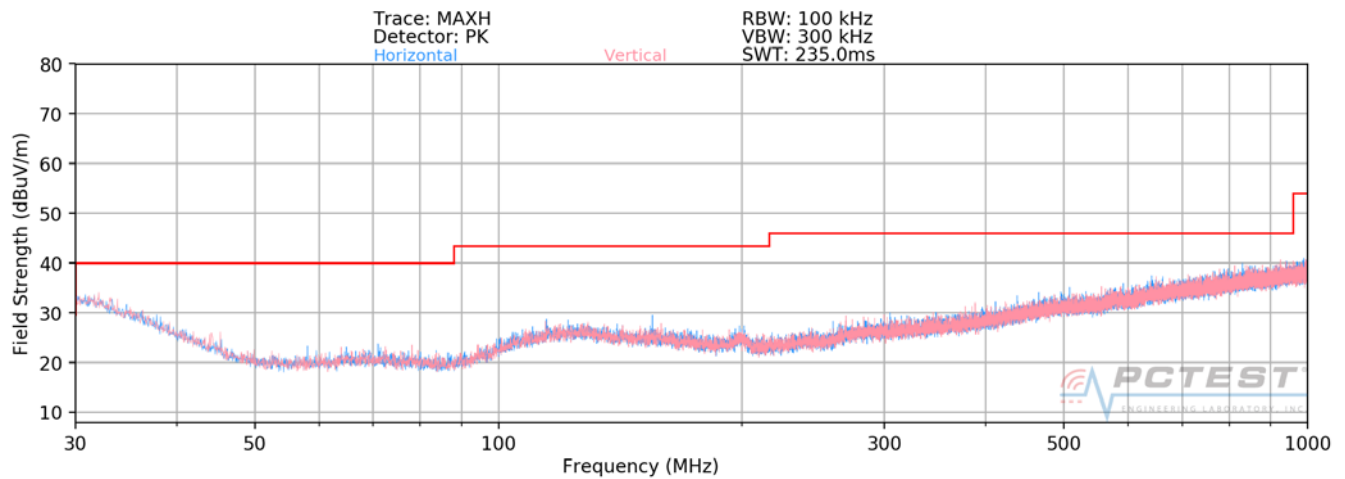

Plot 7-149. Radiated Spurious Plot below 1GHz SISO ANT2

|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 104 of 108                 |

## 7.9 Line-Conducted Test Data

§15.207; RSS-Gen [8.8]

### Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

**All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).**

| Frequency of emission (MHz) | Conducted Limit (dBμV) |           |
|-----------------------------|------------------------|-----------|
|                             | Quasi-peak             | Average   |
| 0.15 – 0.5                  | 66 to 56*              | 56 to 46* |
| 0.5 – 5                     | 56                     | 46        |
| 5 – 30                      | 60                     | 50        |

Table 7-22. Conducted Limits

\*Decreases with the logarithm of the frequency.

### Test Procedures Used

ANSI C63.10-2013, Section 6.2

### Test Settings

#### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


#### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

|                                         |                                                                                     |                                       |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  | MEASUREMENT REPORT<br>(CERTIFICATION) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                      | EUT Type:<br>Portable Tablet          | Page 105 of 108                                                                       |                                 |

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

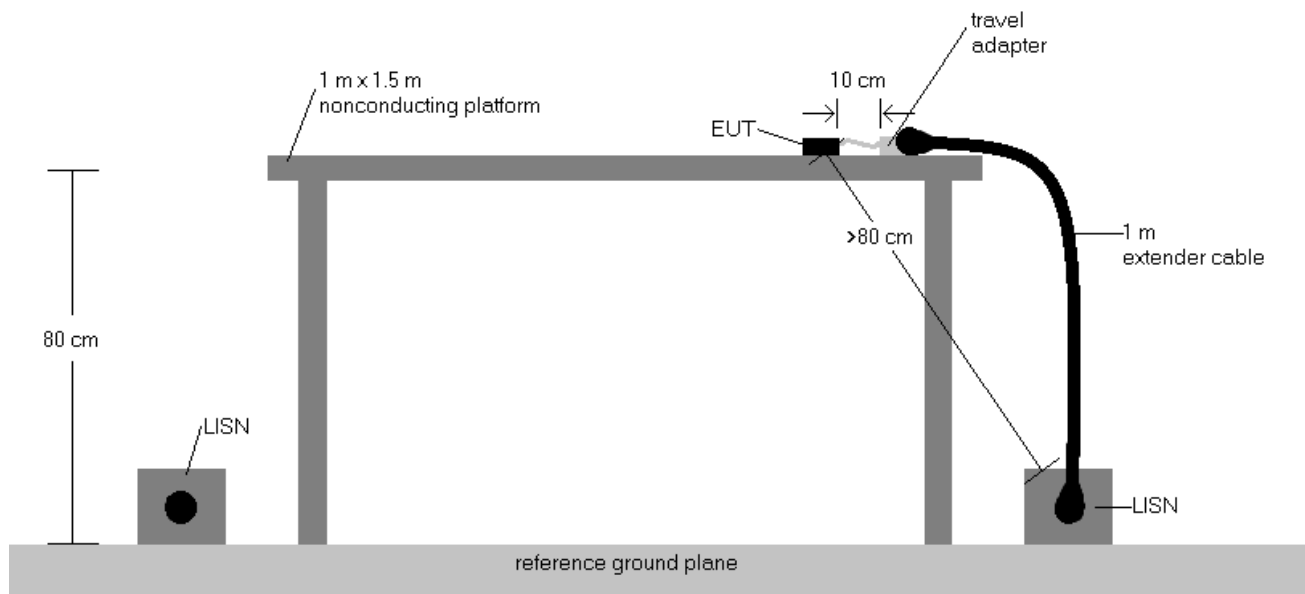


**Figure 7-9. Test Instrument & Measurement Setup**


## Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
3.  $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4.  $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5.  $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 106 of 108                 |

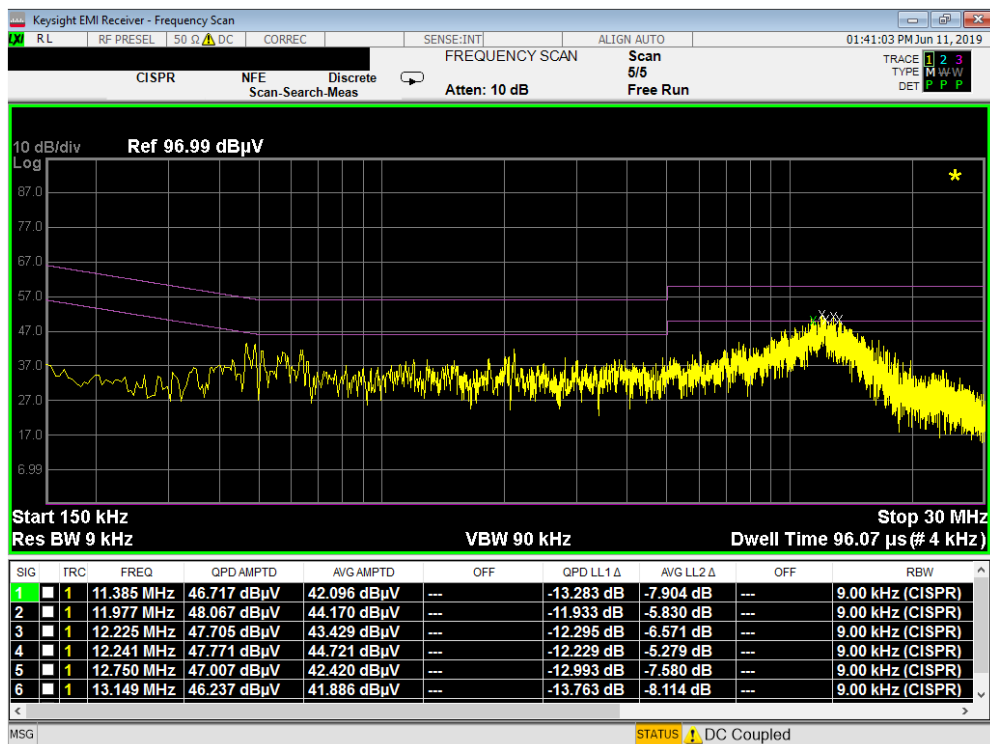

Plot 7-150. Line Conducted Plot with 802.11b (L1)

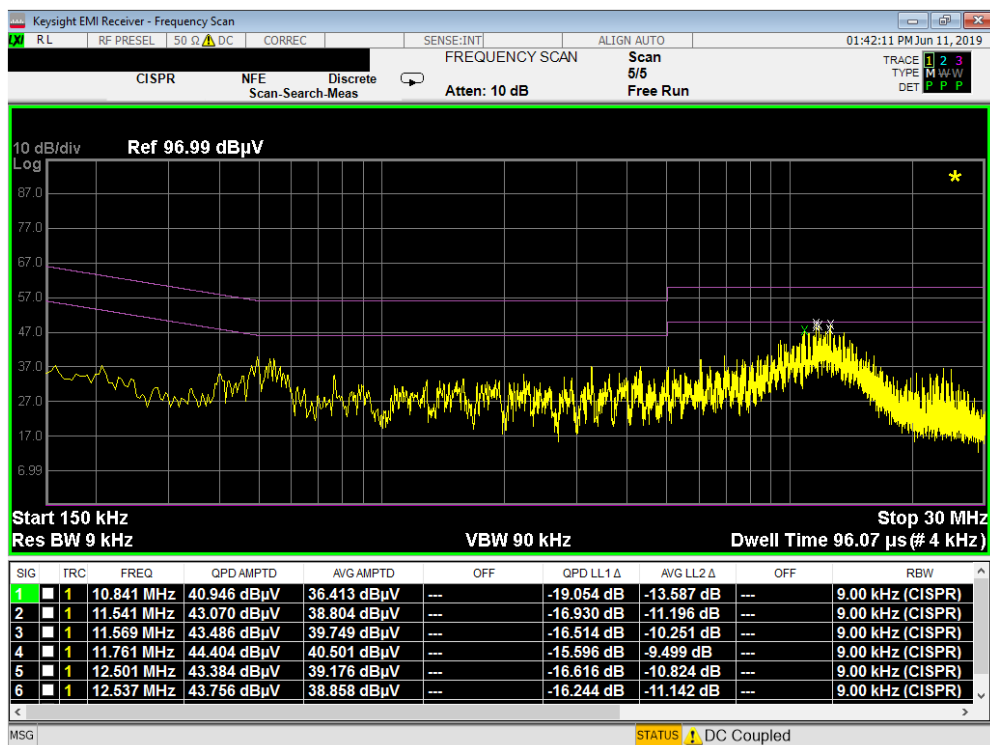

Plot 7-151. Line Conducted Plot with 802.11b (N)

|                                         |                                               |                                       |                |                                 |
|-----------------------------------------|-----------------------------------------------|---------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSMT867V                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04-A3L | Test Dates:<br>6/7 - 7/22/2019                | EUT Type:<br>Portable Tablet          |                | Page 107 of 108                 |

## 8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Tablet FCC ID: A3LSMT867V** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules.

|                                         |                                                                                     |                                       |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMT867V                      |  | MEASUREMENT REPORT<br>(CERTIFICATION) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1907090121-04.A3L | Test Dates:<br>6/7 - 7/22/2019                                                      | EUT Type:<br>Portable Tablet          |                                                                                       | Page 108 of 108                 |