

FCC UNII REPORT

FCC Certification

Applicant Name:

SAMSUNG Electronics Co.,Ltd.

Date of Issue:

June 27, 2016

Test Site/Location:

HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Address:

129, Samsung-ro, Yeongtong-gu, Suwon-si,

Gyeonggi-do, 16677, Rep. of Korea

Report No.: HCT-R-1606-F047-1**HCT FRN:** 0005866421**IC Recognition No.:** 5944A-5**FCC ID : A3LSMV201****APPLICANT : SAMSUNG Electronics Co.,Ltd.****Model(s):**

SM-V201

EUT Type:

On-Board Diagnostics(OBD-II)

Modulation type

OFDM

FCC Classification:

Unlicensed National Information Infrastructure(UNII)

FCC Rule Part(s):

Part 15.407

Band	Mode	Frequency Range (MHz)	Power (dBm)	Power (W)
UNII1	802.11a	5180 – 5240	14.63	0.0290
	802.11n HT20	5180 – 5240	14.68	0.0294
	802.11n HT40	5190 - 5230	14.93	0.0311
UNII3	802.11a	5765 – 5825	13.13	0.0206
	802.11n HT20	5765 – 5825	13.16	0.0207
	802.11n HT40	5795	12.22	0.0167

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

**Report prepared by**
: Kyung Soo Kang**Test Engineer of RF Team****Approved by**
: Jong Seok Lee**Manager of RF Team**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1606-F047	June 21, 2016	- First Approval Report
HCT-R-1606-F047-1	June 27, 2016	- Revise the frequency range of UNII3. - Revise the maximum output power of UNII3 on page 1. - Delete note about DFS.

Table of Contents

1. GENERAL INFORMATION	4
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 DESCRIPTION OF TEST MODES	5
4. INSTRUMENT CALIBRATION.....	6
5. FACILITIES AND ACCREDITATIONS	6
5.1 FACILITIES	6
5.2 EQUIPMENT	6
6. ANTENNA REQUIREMENTS	6
7. MEASUREMENT UNCERTAINTY	7
8. SUMMARY OF TEST RESULTS	8
9. TEST RESULT	9
9.1 DUTY CYCLE.....	9
9.2 EMISSION BANDWIDTH AND MINIMUM EMISSION BANDWIDTH MEASUREMENT	11
9.3 OUTPUT POWER MEASUREMENT	18
9.4 POWER SPECTRAL DENSITY	26
9.5 FREQUENCY STABILITY	31
9.6 RADIATED MEASUREMENT.....	35
9.6.1 RADIATED SPURIOUS EMISSIONS.....	35
9.6.2 RADIATED RESTRICTED BAND EDGE MEASUREMENTS	58
9.7 POWERLINE CONDUCTED EMISSIONS	67
10. LIST OF TEST EQUIPMENT	68
10.1 LIST OF TEST EQUIPMENT(Conducted Test)	68
10.2 LIST OF TEST EQUIPMENT(Radiated Test).....	69

1. GENERAL INFORMATION

Applicant: SAMSUNG Electronics Co.,Ltd.
Address: 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID: A3LSMV201
EUT Type: On-Board Diagnostics(OBD-II)
Model (s): SM-V201
Date(s) of Tests: May 16, 2016 ~ June 21, 2016
Place of Tests: HCT Co., Ltd.
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea

2. EUT DESCRIPTION

Model	SM-V201	
EUT Type	On-Board Diagnostics(OBD-II)	
Power Supply	DC 12 V	
Frequency Range	TX_20 MHz BW:	5180 MHz - 5240 MHz (UNII 1)/ 5765 MHz - 5825 MHz (UNII 3)
	40 MHz BW:	5190 MHz - 5230 MHz (UNII 1)/ 5795 MHz (UNII 3)
	RX_20 MHz BW:	5180 MHz - 5240 MHz (UNII 1)/ 5765 MHz - 5825 MHz (UNII 3)
	40 MHz BW:	5190 MHz - 5230 MHz (UNII 1)/ 5795 MHz (UNII 3)
Modulation Type	OFDM(802.11a, 802.11n)	
Antenna Specification	Manufacturer: PARTRON	
	Antenna type: INTERNAL ANTENNA	
	Peak Gain : -0.27 dBi (5180~5240 UNII1 BAND) / -2.19 dBi (5745~5825 UNII3 BAND)	

3. TEST METHODOLOGY

The measurement procedure described in FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02 dated April 08, 2016 entitled “Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part15, Subpart E” and ANSI C63.10 (Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’ were used in the measurement. For 802.11ac, KDB644545 D03 v01 dated August 14, 2014.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 8 of ANSI C63.10. (Version: 2013)

Conducted Antenna Terminal

See Section from 8.1 to 8.4.(KDB 789033 D02 v01r02)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2006).

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 07, 2015 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203, §15.407

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

* The E.U.T Complies with the requirement of §15.203, §15.407

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	6.07

8. SUMMARY OF TEST RESULTS


Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
26dB Bandwidth	§15.407 (for Power Measurement)	N/A	CONDUCTED	PASS
6 dB Bandwidth	§15.407(e)	>500 kHz (5725-5850 MHz)		PASS
Maximum Conducted Output Power	§15.407(a)(1)	< 250 mW (5150-5250 MHz) < 250 mW or 11+10 log log ₁₀ (BW) dBm (5250-5350 MHz) < 250 mW or 11+10 log log ₁₀ (BW) dBm (5470-5725 MHz) <1 W (5725-5850 MHz)		PASS
Peak Power Spectral Density	§15.407(a)(1),(5)	<11 dBm/ MHz (5150-5250 MHz) <11 dBm/ MHz (5250-5350 MHz) <11 dBm/ MHz (5470-5725 MHz) <30 dBm/500 kHz(5725-5850 MHz)		PASS
Frequency Stability	§15.407(g)	NA		PASS
AC Conducted Emissions 150 kHz-30 MHz	15.207	<FCC 15.207 limits		PASS
Undesirable Emissions	§15.407(b)	<-27 dBm/MHz EIRP (UNII1, 2A, 2C) <-17 dBm/MHz EIRP within 5715-5725 MHz and 5850-5860 MHz (UNII3) <-27 dBm/MHz EIRP outside 5715-5860 MHz (UNII 3)	RADIATED	PASS
General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	15.205, 15.407(b)(5), (6)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS

9. TEST RESULT

9.1 DUTY CYCLE

The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq EBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in section B)1)a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

■ TEST CONFIGURATION

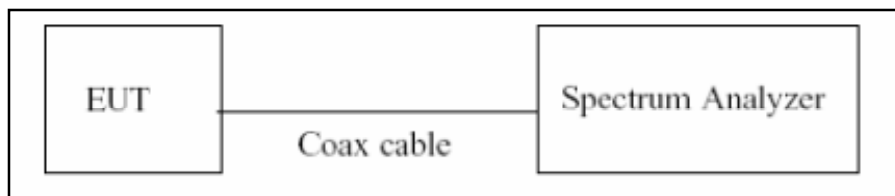

■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We tested according to the zero-span measurement method, (B.2 in KDB 789033 D02 v01r02)

The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.

1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ($\geq$ RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10 \cdot \log(1/\text{Duty Cycle})$

Duty Cycle Factor


Mode	Data Rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11a	6	1.395	1.493	0.93428726	0.295
	9	0.941	1.040	0.90500000	0.434
	12	0.709	0.806	0.87956948	0.557
	18	0.480	0.578	0.82987552	0.810
	24	0.365	0.463	0.78756477	1.037
	36	0.252	0.351	0.71880813	1.434
	48	0.192	0.291	0.66067383	1.800
	54	0.176	0.275	0.64047567	1.935
Mode	MCS INDEX	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11n_HT20	0	1.296	1.394	0.92941176	0.318
	1	0.659	0.757	0.87060998	0.602
	2	0.448	0.546	0.82051282	0.859
	3	0.343	0.441	0.77801285	1.090
	4	0.237	0.334	0.70780258	1.501
	5	0.184	0.282	0.65161290	1.860
	6	0.168	0.266	0.63097996	2.000
	7	0.152	0.251	0.60774524	2.163
802.11n_HT40	0	0.635	0.735	0.86427191	0.633
	1	0.332	0.432	0.76907553	1.140
	2	0.228	0.328	0.69557771	1.577
	3	0.180	0.280	0.64471016	1.906
	4	0.128	0.228	0.56372428	2.489
	5	0.104	0.204	0.51188195	2.908
	6	0.092	0.192	0.47961137	3.191
	7	0.088	0.188	0.47023706	3.277

9.2 EMISSION BANDWIDTH AND MINIMUM EMISSION BANDWIDTH MEASUREMENT

The bandwidth at 26 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum power control level, as defined in KDB 789033 D02 v01r02, at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26 dB bandwidth.

The 26 dB bandwidth is used to determine the conducted power limits.

■ TEST CONFIGURATION

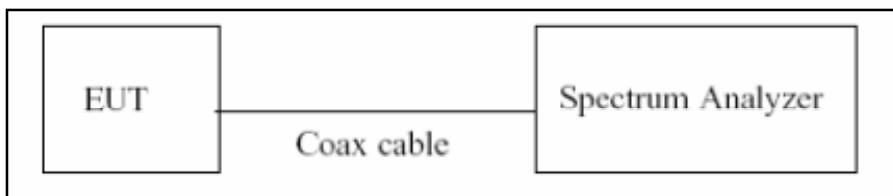

■ TEST PROCEDURE (26dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (C.1 in KDB 789033 D02 v01r02)

1. RBW = approximately 1 % of the emission bandwidth
2. VBW > RBW
3. Detector = Peak
4. Trace mode = max hold
5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

Note : We tested 26 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 26 dB.

In order to simplify the report, attached plots were only the most wide channel.

■ TEST PROCEDURE (for the band 5.725-5.85 GHz, 6 dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to(C.2 in KDB 789033 D02 v01r02)

1. RBW = 100 kHz
2. VBW $\geq$ 3*RBW
3. Detector = Peak
4. Trace mode = max hold
5. Allow the trace to stabilize
6. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points(upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note : We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

TEST RESULTS for 802.11a

Conducted 26 dB Bandwidth Measurements for 802.11a


802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5180	36	23.36	N/A	Pass
5200	40	24.40	N/A	Pass
5240	48	25.01	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11a


802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5765	153	23.79	N/A	Pass
5785	157	22.59	N/A	Pass
5825	165	24.91	N/A	Pass

TEST Plot for 802.11a

802.11a UNII 1 BAND 26dB Bandwidth (CH48)

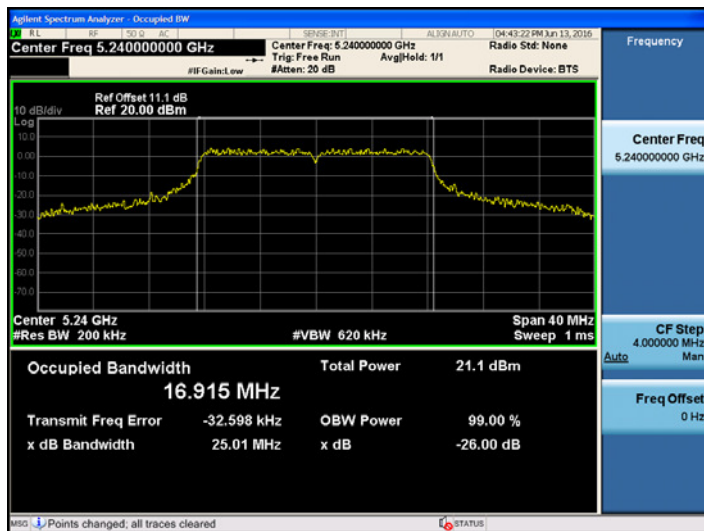

802.11a UNII 3 BAND 26dB Bandwidth (CH 165)

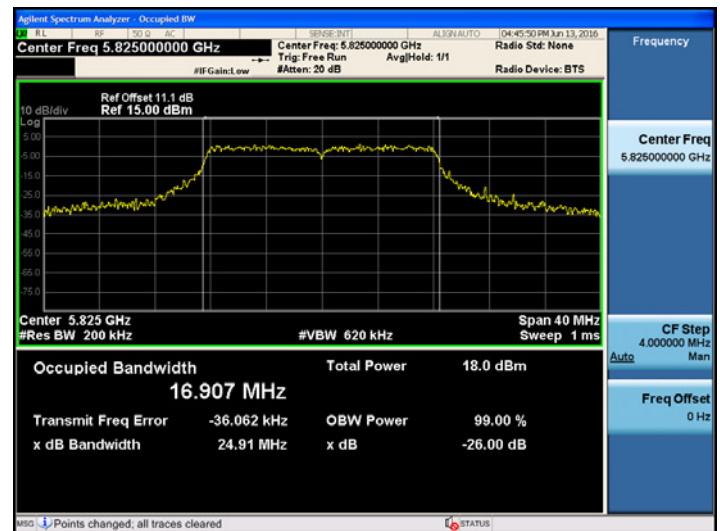

Note : In order to simplify the report, attached plots were only the most wide channel.

TEST RESULTS for 802.11n_HT20

Conducted 26 dB Bandwidth Measurements for 802.11n_HT20


802.11n_HT20 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5180	36	26.97	N/A	Pass
5200	40	25.74	N/A	Pass
5240	48	26.91	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11n_HT20


802.11n_HT20 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5765	153	23.82	N/A	Pass
5785	157	23.29	N/A	Pass
5825	165	23.19	N/A	Pass

TEST Plot for 802.11n_HT20

802.11n_HT20 UNII 1 BAND 26dB Bandwidth(CH 36)

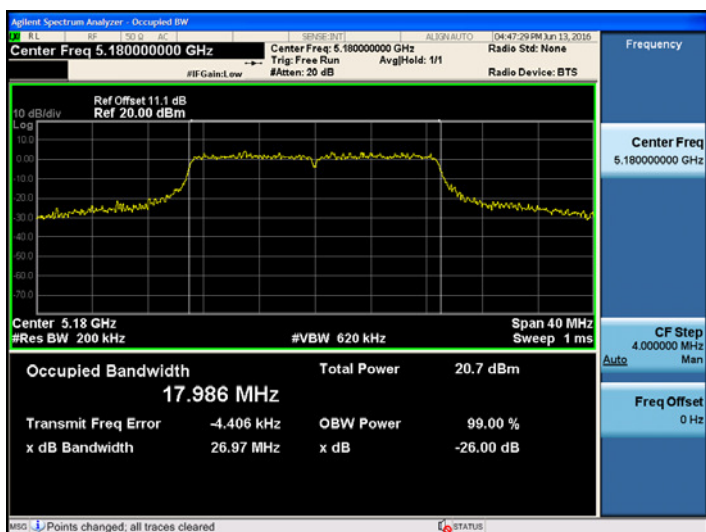

802.11n_HT20 UNII 3 BAND 26dB Bandwidth(CH 153)

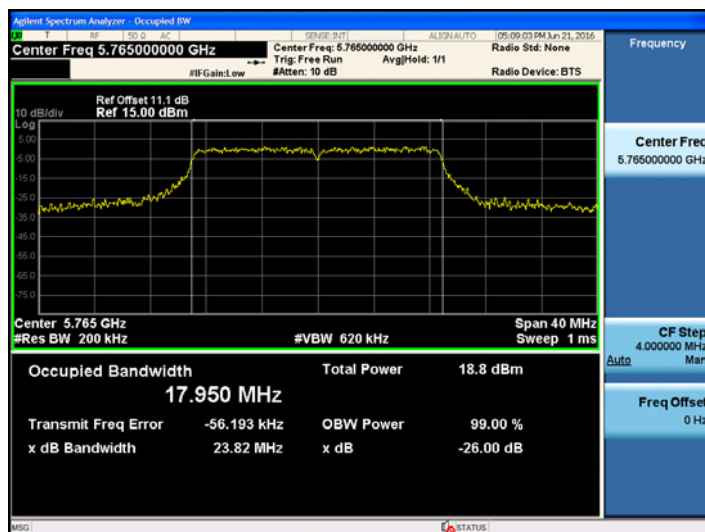

Note : In order to simplify the report, attached plots were only the most wide channel.

TEST RESULTS for 802.11n_HT40

Conducted 26 dB Bandwidth Measurements for 802.11n_HT40


802.11n_HT40 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5190	38	42.97	N/A	Pass
5230	46	53.17	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11n_HT40


802.11n_HT40 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5795	159	52.10	N/A	Pass

TEST Plot for 802.11n_HT40

802.11n_HT40 UNII 1 BAND 26dB Bandwidth(CH 46)

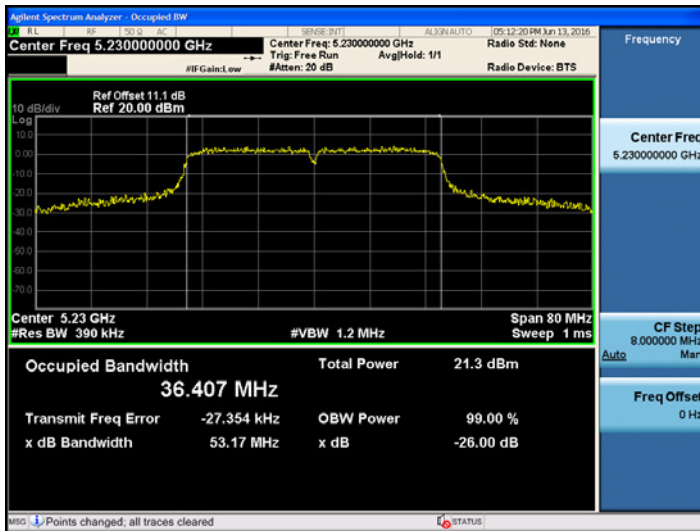

802.11n_HT40 UNII 3 BAND 26dB Bandwidth (CH 159)

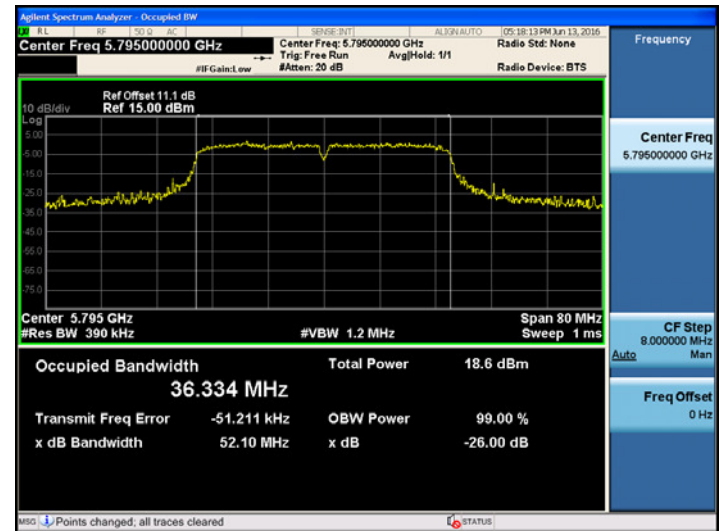

Note : In order to simplify the report, attached plots were only the most wide channel.

TEST RESULTS for 802.11a/n_HT20, HT40

Conducted 6 dB Bandwidth Measurements for 802.11a

802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5765	153	16.44	0.5	Pass
5785	157	16.43	0.5	Pass
5825	165	16.46	0.5	Pass

Conducted 6 dB Bandwidth Measurements for 802.11n_HT20


802.11n_HT20 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5765	153	17.65	0.5	Pass
5785	157	17.64	0.5	Pass
5825	165	17.65	0.5	Pass

Conducted 6 dB Bandwidth Measurements for 802.11n_HT40


802.11n_HT40 Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5795	159	35.25	0.5	Pass

■ TEST Plot for 802.11a/n_HT20, HT40


802.11a UNII 3 BAND 6dB Bandwidth (CH.165)

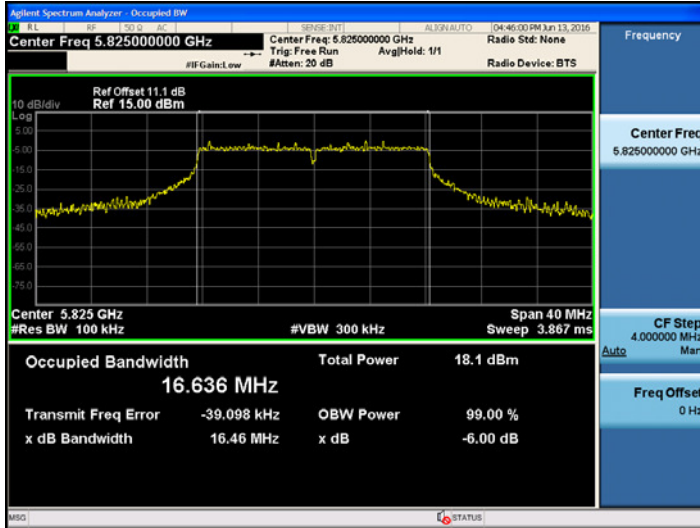

802.11n_HT20 UNII 3 BAND 6dB Bandwidth(CH.165)

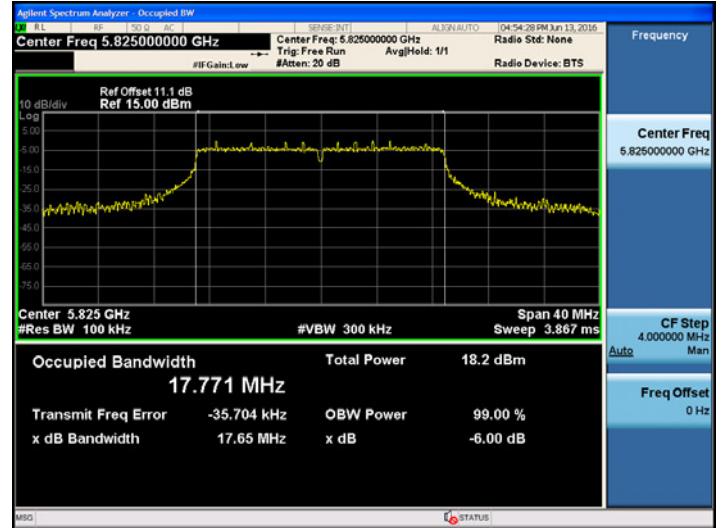

802.11n_HT40 UNII 3 BAND 6dB Bandwidth(CH.159)

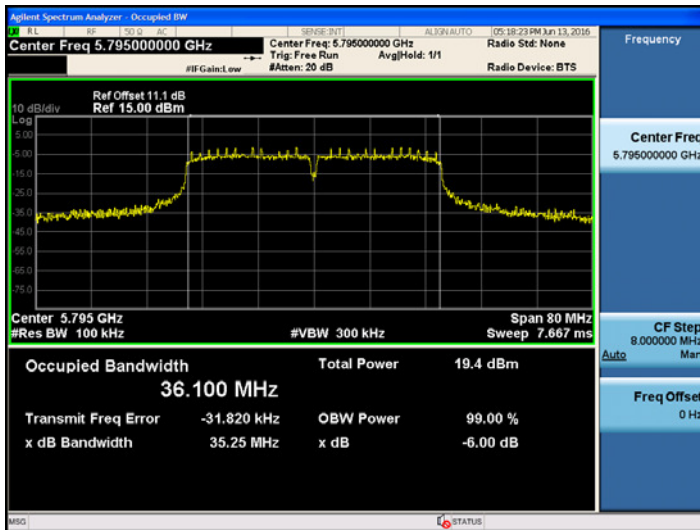

Note : In order to simplify the report, attached plots were only the most wide channel.

9.3 OUTPUT POWER MEASUREMENT

Test Requirements and limit, §15.407(a)(1)


A transmitter antenna terminal of EUT is connected to the input of a Power meter or Spectrum Analyzer .Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies.

■ Limit

Band	Mode	Limit (dBm)
UNII 1	802.11a,n	23.98
UNII 3	802.11a,n	30.00

Note : According to KDB644545 D03 v01, the limit on maximum conducted output power in each U-NII band for straddle channel is computed based on the portion of the emission bandwidth contained within that band.

■ TEST CONFIGURATION(20 MHz BW)

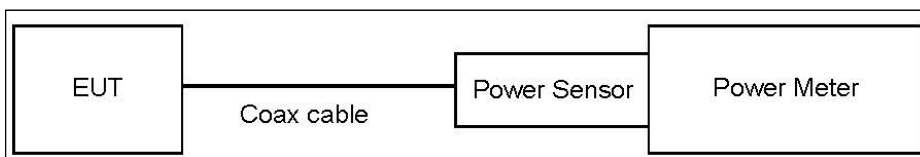

■ TEST PROCEDURE(20 MHz BW)

- Average Power (Procedure E.3.a in KDB 789033 D02 v01r02).
 1. Measure the duty cycle.
 2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 3. Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.


Note :

1. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1, 3	11.1

(Actual value of loss for the attenuator and cable combination)

■ TEST CONFIGURATION(40 MHz BW)

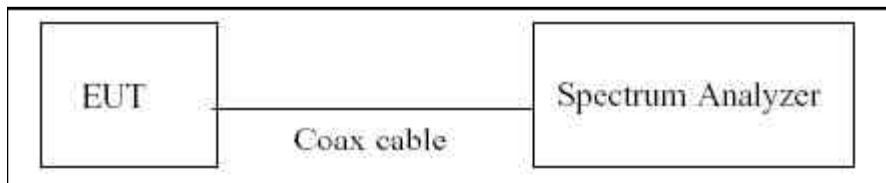

■ TEST PROCEDURE(40 MHz BW)

▪ Average Power

The transmitter output is connected to the Spectrum Analyzer. We use the spectrum analyzer's integrated band power measurement function. We tested according to Method SA-2 in KDB 789033 D02 v01r02.

The Spectrum Analyzer is set to

1. Measure the duty cycle.
2. Set span to encompass the 26 dB EBW of the signal.
3. RBW = 1 MHz.
4. VBW $\geq$ 3 MHz.
5. Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$.
6. Sweep time = auto.
7. Detector = RMS.
8. Do not use sweep triggering. Allow the sweep to "free run".
9. Trace average at least 100 traces in power averaging(RMS) mode
10. Integrated bandwidth = OBW
11. Add $10\log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

■ Sample Calculation (Conducted)

Output Power = Reading Value + ATT loss + Cable loss(1 ea) + Duty Cycle Factor

Note: 1. Spectrum reading values are not plot data. The power results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss + Cable loss

3. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1, 3	11.1

(Actual value of loss for the attenuator and cable combination)

802.11a (UNII 1)

■ TEST RESULTS

Conducted Output Power Measurements (802.11a Mode: 5180~5240)

802.11a Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	6	13.94	0.30	14.23	23.98
		9	13.78	0.43	14.22	23.98
		12	13.70	0.56	14.25	23.98
		18	13.49	0.81	14.30	23.98
		24	13.24	1.04	14.28	23.98
		36	12.90	1.43	14.33	23.98
		48	12.56	1.80	14.36	23.98
		54	12.45	1.93	14.39	23.98
5200	40	6	13.95	0.30	14.25	23.98
		9	13.91	0.43	14.35	23.98
		12	13.80	0.56	14.36	23.98
		18	13.61	0.81	14.42	23.98
		24	13.59	1.04	14.63	23.98
		36	13.15	1.43	14.58	23.98
		48	12.72	1.80	14.52	23.98
		54	12.60	1.93	14.54	23.98
5240	48	6	14.15	0.30	14.45	23.98
		9	14.02	0.43	14.46	23.98
		12	13.91	0.56	14.47	23.98
		18	13.69	0.81	14.50	23.98
		24	13.47	1.04	14.50	23.98
		36	13.12	1.43	14.56	23.98
		48	12.78	1.80	14.58	23.98
		54	12.66	1.93	14.60	23.98

802.11a (UNII 3)

■ TEST RESULTS

Conducted Output Power Measurements (802.11a Mode: 5765~5825)

802.11a Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5765	153	6	12.56	0.30	12.86	30
		9	12.62	0.43	13.05	30
		12	12.41	0.56	12.97	30
		18	12.28	0.81	13.09	30
		24	12.05	1.04	13.09	30
		36	11.67	1.43	13.10	30
		48	11.33	1.80	13.13	30
		54	11.20	1.93	13.13	30
5785	157	6	11.38	0.30	11.67	30
		9	11.27	0.43	11.70	30
		12	11.15	0.56	11.71	30
		18	10.93	0.81	11.74	30
		24	10.69	1.04	11.73	30
		36	10.31	1.43	11.75	30
		48	9.96	1.80	11.76	30
		54	9.87	1.93	11.80	30
5825	165	6	11.38	0.30	11.67	30
		9	11.25	0.43	11.68	30
		12	11.13	0.56	11.69	30
		18	10.95	0.81	11.76	30
		24	10.68	1.04	11.72	30
		36	10.32	1.43	11.75	30
		48	9.97	1.80	11.77	30
		54	9.85	1.93	11.78	30

802.11n_HT20 (UNII 1)

■ TEST RESULTS

Conducted Output Power Measurements (802.11n_HT20 Mode: 5180~5240)

802.11n_HT20 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	0	14.05	0.32	14.37	23.98
		1	13.81	0.60	14.41	23.98
		2	13.58	0.86	14.44	23.98
		3	13.35	1.09	14.44	23.98
		4	12.99	1.50	14.49	23.98
		5	12.67	1.86	14.53	23.98
		6	12.55	2.00	14.55	23.98
		7	12.39	2.16	14.56	23.98
5200	40	0	14.16	0.32	14.48	23.98
		1	13.92	0.60	14.53	23.98
		2	13.69	0.86	14.55	23.98
		3	13.46	1.09	14.55	23.98
		4	13.07	1.50	14.58	23.98
		5	12.75	1.86	14.61	23.98
		6	12.63	2.00	14.63	23.98
		7	12.49	2.16	14.65	23.98
5240	48	0	14.21	0.32	14.53	23.98
		1	13.97	0.60	14.57	23.98
		2	13.74	0.86	14.59	23.98
		3	13.50	1.09	14.59	23.98
		4	13.11	1.50	14.61	23.98
		5	12.80	1.86	14.66	23.98
		6	12.67	2.00	14.67	23.98
		7	12.52	2.16	14.68	23.98

802.11n_HT20 (UNII 3)

■ TEST RESULTS

Conducted Output Power Measurements (802.11n_HT20 Mode: 5765~5825)

802.11n_HT20 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5765	153	0	12.74	0.32	13.06	30
		1	12.50	0.60	13.10	30
		2	12.20	0.86	13.06	30
		3	11.99	1.09	13.08	30
		4	11.61	1.50	13.11	30
		5	11.27	1.86	13.13	30
		6	11.16	2.00	13.16	30
		7	11.00	2.16	13.16	30
5785	157	0	11.46	0.32	11.78	30
		1	11.22	0.60	11.82	30
		2	10.98	0.86	11.83	30
		3	10.72	1.09	11.81	30
		4	10.32	1.50	11.82	30
		5	10.00	1.86	11.86	30
		6	9.87	2.00	11.87	30
		7	9.72	2.16	11.88	30
5825	165	0	11.45	0.32	11.76	30
		1	11.19	0.60	11.79	30
		2	10.93	0.86	11.79	30
		3	10.67	1.09	11.76	30
		4	10.31	1.50	11.81	30
		5	9.96	1.86	11.82	30
		6	9.84	2.00	11.84	30
		7	9.69	2.16	11.85	30

802.11n_HT40 (UNII 1)

■ TEST RESULTS

Conducted Output Power Measurements (802.11n_HT40 Mode: 5190~5230)

802.11n_HT40 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5190	38	0	12.16	0.63	12.79	23.98
		1	11.73	1.14	12.87	23.98
		2	11.33	1.58	12.90	23.98
		3	10.94	1.91	12.84	23.98
		4	10.36	2.49	12.85	23.98
		5	9.98	2.91	12.89	23.98
		6	9.78	3.19	12.97	23.98
		7	9.57	3.28	12.85	23.98
5230	46	0	14.17	0.63	14.81	23.98
		1	13.70	1.14	14.84	23.98
		2	13.29	1.58	14.87	23.98
		3	12.92	1.91	14.83	23.98
		4	12.37	2.49	14.86	23.98
		5	11.96	2.91	14.87	23.98
		6	11.71	3.19	14.90	23.98
		7	11.65	3.28	14.93	23.98

802.11n_HT40 (UNII 3)


■ TEST RESULTS

Conducted Output Power Measurements (802.11n_HT40 Mode: 5795)


802.11n_HT40 Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5795	159	0	11.33	0.63	11.96	30
		1	10.94	1.14	12.08	30
		2	10.52	1.58	12.10	30
		3	10.20	1.91	12.11	30
		4	9.65	2.49	12.14	30
		5	9.24	2.91	12.15	30
		6	9.03	3.19	12.22	30
		7	8.93	3.28	12.21	30

■ TEST Plot _802.11n_HT40

802.11n_HT40 UNII 1 BAND Average Power (5190 MHz ~5230 MHz) CH 46 MCS7

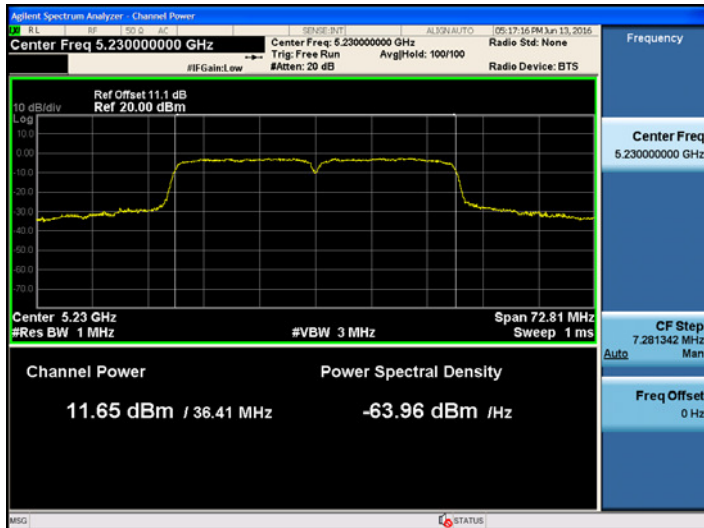

802.11n_HT40 UNII 3 BAND Average Power (5795 MHz) CH 159 MCS6

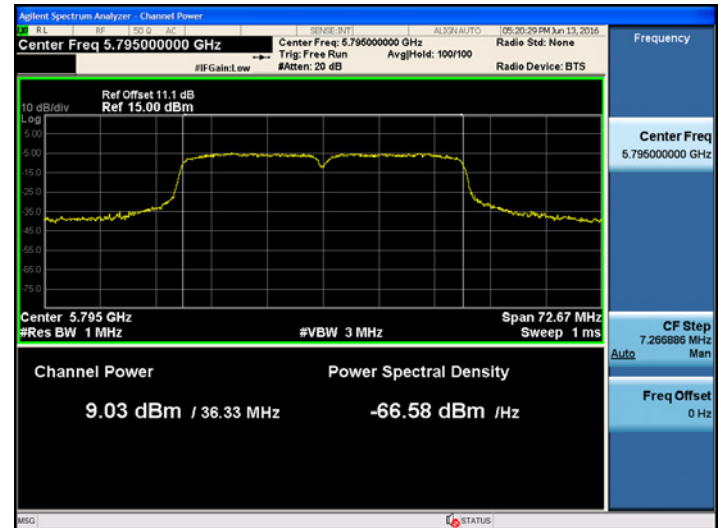

9.4 POWER SPECTRAL DENSITY

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies. The maximum permissible peak power spectral density is 11 dBm/ MHz for UNII 1,2A, 2C and 30 dBm/500 kHz for UNII 3.


■ Limit

Power Spectral Density

Band	Mode	Limit
UNII 1	802.11 a,n	11 dBm/MHz
UNII 3	802.11a,n	30 dBm/500 kHz

Note : Note : According to KDB644545 D03 v01, emission for straddle channels in each band shall comply with the PSD limits applicable to that band under the appropriate rule section.

■ TEST CONFIGURATION

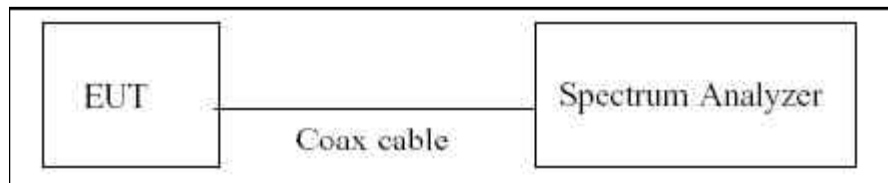

■ TEST PROCEDURE

We tested according to Method in KDB 789033 D02 v01r02.

The spectrum analyzer is set to :

1. Set span to encompass the entire emission bandwidth(EBW) of the signal.
2. RBW = 1 MHz(510 kHz for UNII 3)
3. VBW $\geq$ 3 MHz
4. Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$.
5. Sweep time = auto.
6. Detector = RMS(i.e., power averaging), if available. Otherwise, use sample detector mode.
7. Do not use sweep triggering. Allow the sweep to “free run”.
8. Trace average at least 100 traces in power averaging(RMS) mode
9. Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
10. If Method SA-2 was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.

■ Sample Calculation

PSD = Reading Value + ATT loss + Cable loss(1 ea) + Duty Cycle Factor

Output Power = 5 dBm + 10 dB + 0.8 dB + 0.21 dB = 16.01 dBm

Note :

1. Spectrum reading values are not plot data. The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 5.2 GHz, 5.3 GHz and 5.6 GHz range that was rounded off to the closest tenth dB. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1, 3	11.1

(Actual value of loss for the attenuator and cable combination)

802.11a

TEST RESULTS

Conducted Power Density Measurements


Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5180	36	802.11a	1.109	1.935	3.044	11	Pass
5200	40		2.276	1.037	3.313		Pass
5240	48		1.630	1.935	3.565		Pass
5765	153		-3.212	1.935	-1.277		Pass
5785	157		-3.799	1.935	-1.864		Pass
5825	165		-4.074	1.935	-2.139		Pass

TEST Plot for 802.11a

802.11a UNII 1 BAND PSD CH 48



802.11a UNII 3 BAND PSD CH 153

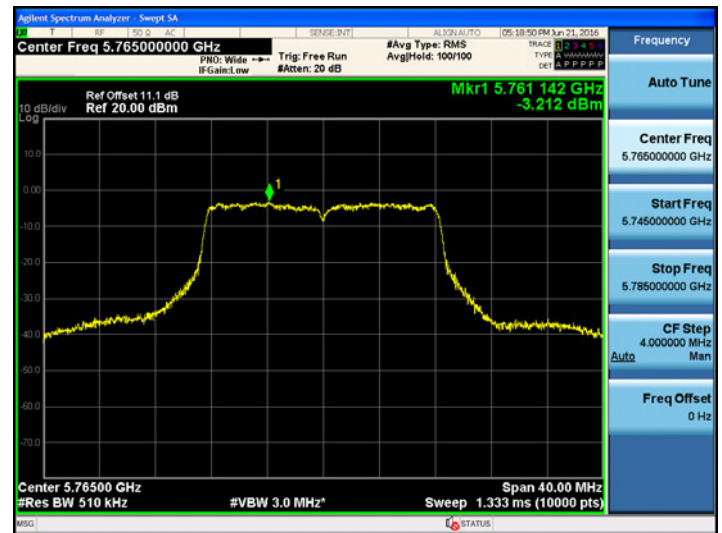

■ 802.11n_HT20


■ TEST RESULTS

Conducted Power Density Measurements


Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5180	36	802.11n_HT20	1.070	2.163	3.233	11	Pass
5200	40		1.124	2.163	3.287		Pass
5240	48		1.722	2.163	3.885		Pass
5765	153		-3.447	2.163	-1.284		
5785	157		-4.337	2.163	-2.174		Pass
5825	165		-4.313	2.163	-2.150		Pass

■ TEST Plot for 802.11n_HT20

802.11n_HT20 UNII 1 BAND PSD CH 48

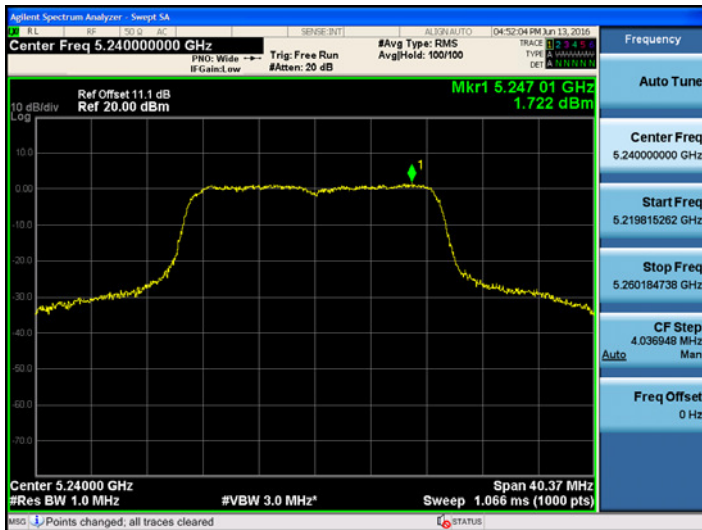

802.11n_HT20 UNII 3 BAND PSD CH 153

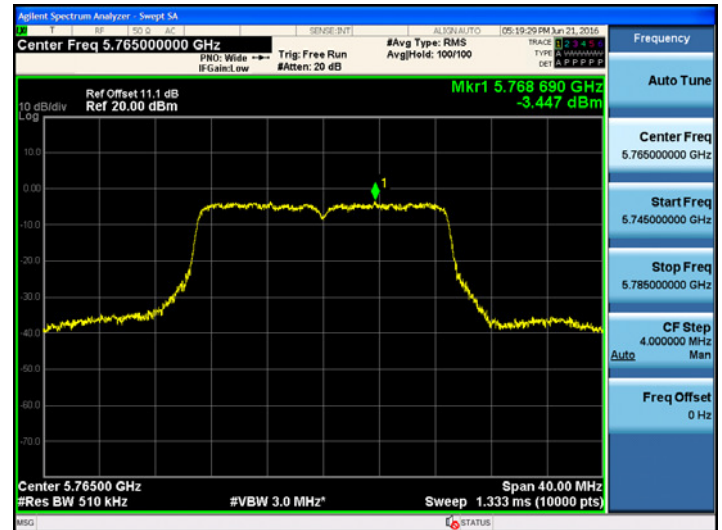

802.11n_HT40


TEST RESULTS

Conducted Power Density Measurements


Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5190	38	802.11n_HT40	-4.086	3.191	-0.895	11	Pass
5230	46		-1.876	3.277	1.401		Pass
5795	159		-7.382	3.191	-4.191		Pass

TEST Plot for 802.11n_HT40

802.11n_HT40 UNII 1 BAND PSD CH 46

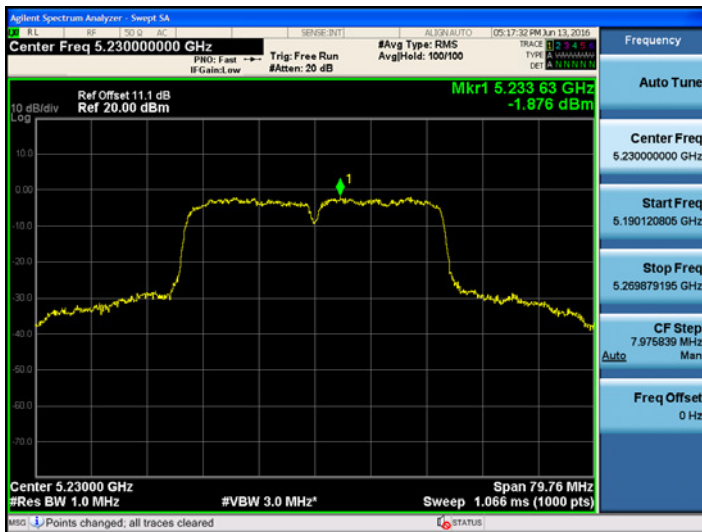

802.11n_HT40 UNII 3 BAND PSD CH 159

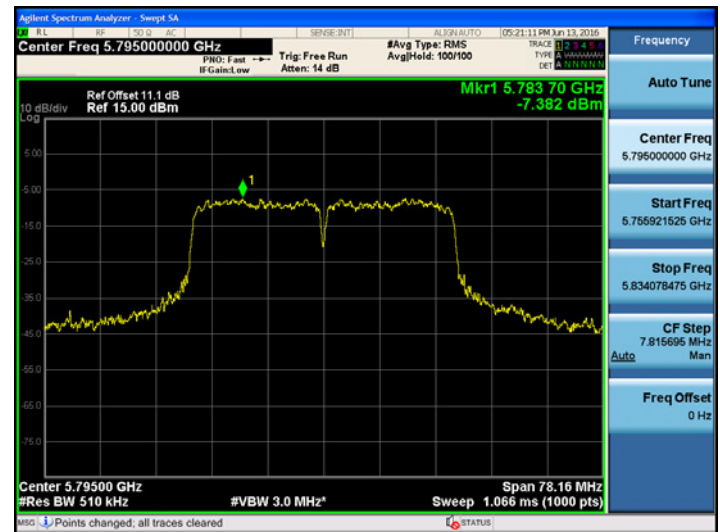

9.5 FREQUENCY STABILITY.

The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -30 °C and 50 °C. The temperature was incremented by 10 °C intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.

20 MHz BW

OPERATING BAND:	UNII Band 1
OPERATING FREQUENCY:	5,180,000,000 Hz
CHANNEL:	36
REFERENCE VOLTAGE:	12 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	12.00	+20(Ref)	5179964.60	-35.40
100%		-30	5179957.90	-42.10
100%		-20	5179959.50	-40.50
100%		-10	5179960.30	-39.70
100%		0	5179961.70	-38.30
100%		+10	5179963.10	-36.90
100%		+30	5179965.90	-34.10
100%		+40	5179967.50	-32.50
100%		+50	5179968.80	-31.20
115%	13.80	+20	5179964.10	-35.90
Batt. Endpoint	10.20	+20	5179965.40	-34.60

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3
 OPERATING FREQUENCY: 5,745,000,000 Hz
 CHANNEL: 157
 REFERENCE VOLTAGE: 12 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	12.00	+20(Ref)	5784958.20	-41.80
100%		-30	5784950.90	-49.10
100%		-20	5784952.30	-47.7
100%		-10	5784953.80	-46.2
100%		0	5784955.00	-45
100%		+10	5784956.60	-43.4
100%		+30	5784959.40	-40.6
100%		+40	5784960.70	-39.3
100%		+50	5784962.20	-37.80
115%	13.80	+20	5784957.70	-42.30
Batt. Endpoint	10.20	+20	5784958.90	-41.1

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

40 MHz BW

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,190,000,000 Hz
 CHANNEL: 38
 REFERENCE VOLTAGE: 12 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	12	+20(Ref)	5189962.50	-37.50
100%		-30	5189957.20	-42.80
100%		-20	5189958.40	-41.60
100%		-10	5189959.50	-40.50
100%		0	5189960.90	-39.10
100%		+10	5189961.30	-38.70
100%		+30	5189963.70	-36.30
100%		+40	5189965.00	-35.00
100%		+50	5189966.30	-33.70
115%	13.8	+20	5189962.10	-37.90
Batt. Endpoint	10.2	+20	5189963.20	-36.80

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 3
OPERATING FREQUENCY:	5,755,000,000 Hz
CHANNEL:	159
REFERENCE VOLTAGE:	12 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	12	+20(Ref)	5794958.20	-41.80
100%		-30	5794952.20	-47.80
100%		-20	5794953.30	-46.7
100%		-10	5794954.70	-45.3
100%		0	5794955.90	-44.1
100%		+10	5794957.00	-43
100%		+30	5794959.40	-40.6
100%		+40	5794960.60	-39.4
100%		+50	5794961.90	-38.10
115%	13.8	+20	5794957.60	-42.40
Batt. Endpoint	10.2	+20	5794958.70	-41.3

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

9.6 RADIATED MEASUREMENT

9.6.1 RADIATED SPURIOUS EMISSIONS.

Test Requirements and limit, §15.205, §15.209, §15.407

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


■ §15.407, KDB 789033 D02

All harmonics that do not lie in a restricted band are subject to a peak limit of -27 dBm/MHz. At a distance of 3 meters the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions of 68.2 dBμV/m.


Especially, for transmitter operating in the 5725 Mhz – 5850 MHz : all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequency 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.


Test Configuration

Below 30 MHz

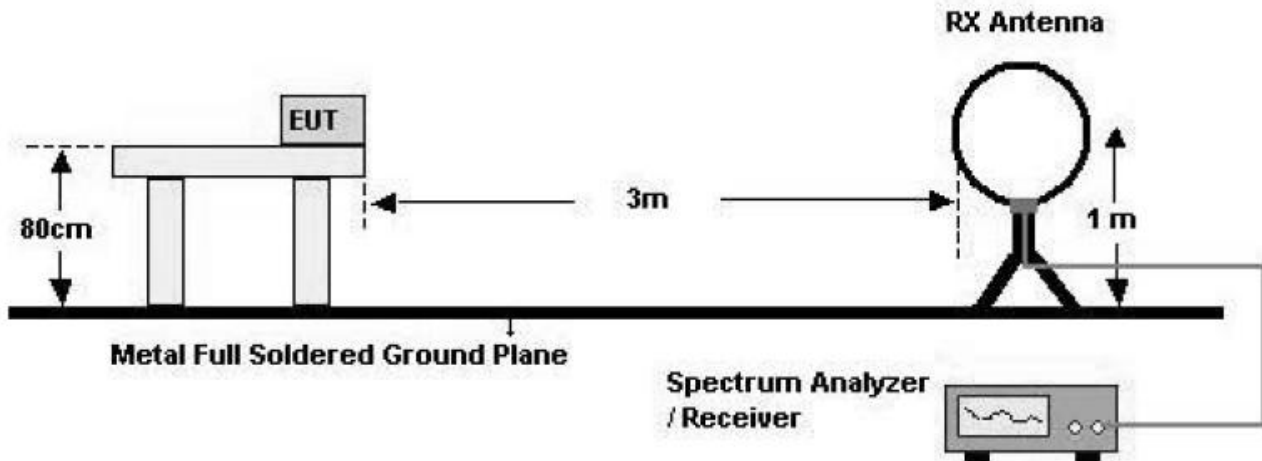

30 MHz - 1 GHz

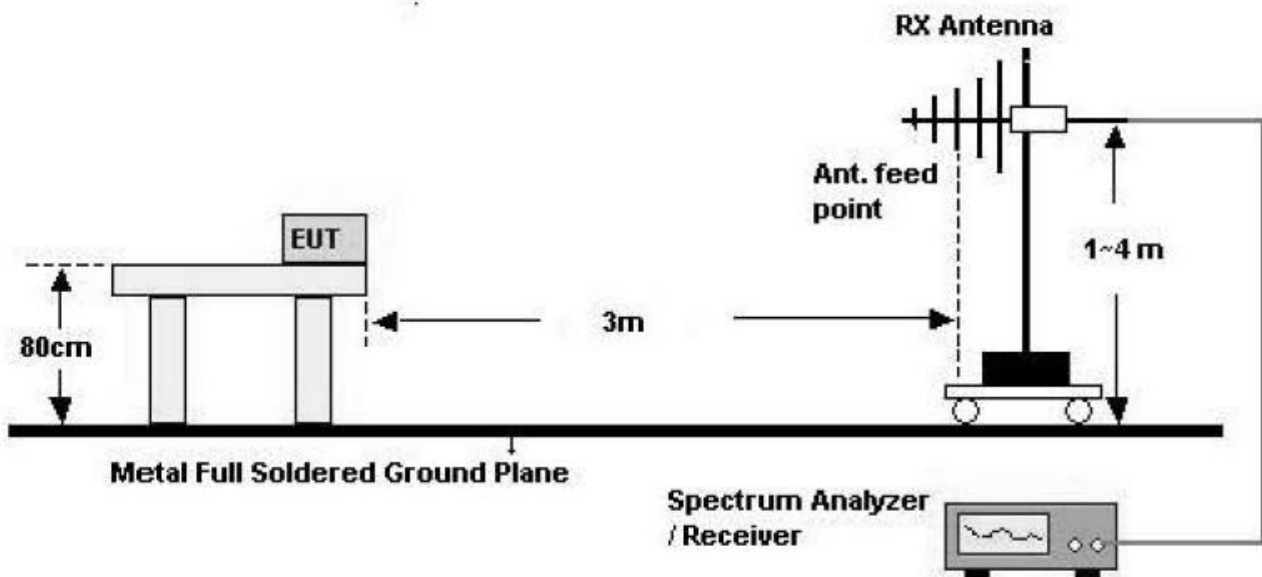

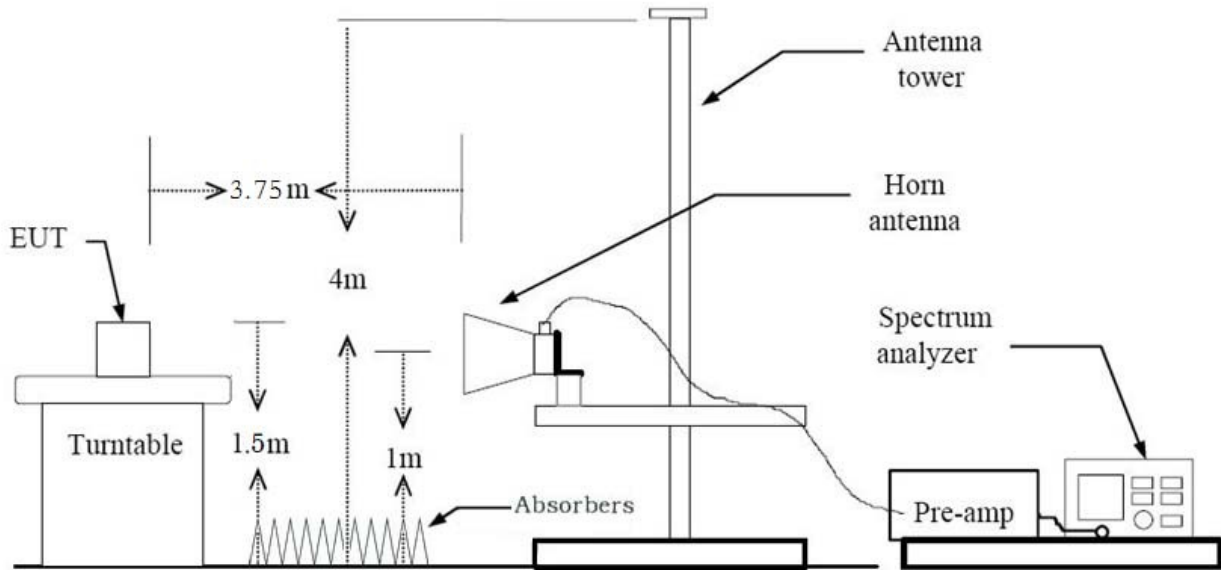Above 1 GHz**TEST PROCEDURE USED**

ANSI C63.10:2013

Method G)5) in KDB 789033 D02 v01r02 (Peak)

Method G)6)d) in KDB 789033 D02 v01r02 (Average)

. Spectrum setting:**- Peak.**

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = Peak
4. Sweep Time = auto
5. Trace mode = max hold
6. Allow sweeps to continue until the trace stabilizes.
7. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.

- Average (Method VB :Averaging using reduced video bandwidth)

1. RBW = 1 MHz
2. VBW
 - 2.1. If the EUT is configured to transmit with duty cycle $\geq$ 98 percent, set $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz.
 - 2.2. If the EUT duty cycle is $<$ 98 percent, set $VBW \geq 1/T$, where T is the minimum transmission duration.

3. The analyzer is set to linear detector mode.
4. Detector = Peak.
5. Sweep time = auto.
6. Trace mode = max hold.
7. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

Note :

1. We used the Method VB for 802.11a/n_HT20, n_HT40 mode to perform the average field strength measurements.
2. The actual setting value of VBW for 802.11a/n_HT20, n_HT40
3. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
4. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Mode	Worst Data rate (Mbps)	T_{on} (ms)	T_{total} (ms)	Duty Cycle (%)	VBW(1/T) (Hz)	The actual setting value of VBW (Hz)
a	6	1.395	1.493	93.43	717	1000
n_HT20	MCS 0	1.296	1.394	92.94	772	1000
n_HT40	MCS 0	0.635	0.735	86.43	1575	3000

TEST RESULTS

9 kHz – 30MHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)
4. Limit line = specific Limits (dB μ V) + Distance extrapolation factor
5. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

TEST RESULTS

Below 1 GHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	$\text{dB}_{\mu\text{V}}$	dB /m	dB	(H/V)	$\text{dB}_{\mu\text{V/m}}$	$\text{dB}_{\mu\text{V/m}}$	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Above 1 GHz

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10360	59.87	-0.27	V	59.60	68.20	8.60	PK
15540	59.37	-0.01	V	59.36	73.98	14.62	PK
15540	45.51	-0.01	V	45.50	53.98	8.48	AV
10360	60.53	-0.27	H	60.26	68.20	7.94	PK
15540	59.23	-0.01	H	59.22	73.98	14.76	PK
15540	45.46	-0.01	H	45.45	53.98	8.53	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5200 MHz
Channel No.	40 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10400	59.88	-0.22	V	59.66	68.20	8.54	PK
15600	60.40	-0.57	V	59.83	73.98	14.15	PK
15600	45.94	-0.57	V	45.37	53.98	8.61	AV
10400	60.27	-0.22	H	60.05	68.20	8.15	PK
15600	60.03	-0.57	H	59.46	73.98	14.52	PK
15600	45.77	-0.57	H	45.20	53.98	8.78	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5240 MHz
Channel No.	48 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10480	59.35	-0.65	V	58.70	68.20	9.50	PK
15720	61.35	0.32	V	61.67	73.98	12.31	PK
15720	46.36	0.32	V	46.68	53.98	7.30	AV
10480	59.73	-0.65	H	59.08	68.20	9.12	PK
15720	59.90	0.32	H	60.22	73.98	13.76	PK
15720	46.27	0.32	H	46.59	53.98	7.39	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11 n_20 MHz BW
Transfer MCS Index:	0
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10360	59.83	-0.27	V	59.56	68.20	8.64	PK
15540	59.13	-0.01	V	59.12	73.98	14.86	PK
15540	45.06	-0.01	V	45.05	53.98	8.93	AV
10360	59.62	-0.27	H	59.35	68.20	8.85	PK
15540	58.59	-0.01	H	58.58	73.98	15.40	PK
15540	45.10	-0.01	H	45.09	53.98	8.89	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
5. We have done all data rate in 802.11n_20 MHz BW. Worst case is MCS0 in 802.11n_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11 n_20 MHz BW
Transfer MCS Index:	0
Operating Frequency	5200 MHz
Channel No.	40 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10400	60.49	-0.22	V	60.27	68.20	7.93	PK
15600	59.38	-0.57	V	58.81	73.98	15.17	PK
15600	45.38	-0.57	V	44.81	53.98	9.17	AV
10400	59.07	-0.22	H	58.85	68.20	9.35	PK
15600	59.79	-0.57	H	59.22	73.98	14.76	PK
15600	45.51	-0.57	H	44.94	53.98	9.04	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
5. We have done all data rate in 802.11n_20 MHz BW. Worst case is MCS0 in 802.11n_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11 n_20 MHz BW
Transfer MCS Index:	0
Operating Frequency	5240 MHz
Channel No.	48 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10480	59.08	-0.65	V	58.43	68.20	9.77	PK
15720	60.08	0.32	V	60.40	73.98	13.58	PK
15720	45.90	0.32	V	46.22	53.98	7.76	AV
10480	59.18	-0.65	H	58.53	68.20	9.67	PK
15720	59.41	0.32	H	59.73	73.98	14.25	PK
15720	45.97	0.32	H	46.29	53.98	7.69	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
5. We have done all data rate in 802.11n_20 MHz BW. Worst case is MCS0 in 802.11n_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11n_40 MHz BW
Transfer MCS Index:	0
Operating Frequency	5190 MHz
Channel No.	38 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10380	60.22	-0.57	V	59.65	68.20	8.55	PK
15570	59.42	-0.20	V	59.22	73.98	14.76	PK
15570	46.57	-0.20	V	46.37	53.98	7.61	AV
10380	59.34	-0.57	H	58.77	68.20	9.43	PK
15570	59.46	-0.20	H	59.26	73.98	14.72	PK
15570	46.43	-0.20	H	46.23	53.98	7.75	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
5. We have done all data rate in 802.11n_40 MHz BW. Worst case is MCS0 in 802.11n_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 1
Operation Mode:	802.11n_40 MHz BW
Transfer MCS Index:	0
Operating Frequency	5230 MHz
Channel No.	46 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10460	59.79	-0.34	V	59.45	68.20	8.75	PK
15690	60.19	0.02	V	60.21	73.98	13.77	PK
15690	47.48	0.02	V	47.50	53.98	6.48	AV
10460	59.09	-0.34	H	58.75	68.20	9.45	PK
15690	60.05	0.02	H	60.07	73.98	13.91	PK
15690	47.11	0.02	H	47.13	53.98	6.85	AV

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
5. We have done all data rate in 802.11n_40 MHz BW. Worst case is MCS0 in 802.11n_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5765MHz
Channel No.	153 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11530	60.30	0.24	V	60.54	73.98	13.44	PK
11530	47.95	0.24	V	48.19	53.98	5.79	AV
17235	59.18	4.46	V	63.64	68.20	4.56	PK
11530	59.12	0.24	H	59.36	73.98	14.62	PK
11530	46.67	0.24	H	46.91	53.98	7.07	AV
17235	59.30	4.46	H	63.76	68.20	4.44	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5785 MHz
Channel No.	157 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11570	58.89	-0.14	V	58.75	73.98	15.23	PK
11570	47.29	-0.14	V	47.15	53.98	6.83	AV
17355	59.63	4.61	V	64.24	68.20	3.96	PK
11570	58.52	-0.14	H	58.38	73.98	15.60	PK
11570	46.50	-0.14	H	46.36	53.98	7.62	AV
17355	59.00	4.61	H	63.61	68.20	4.59	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5825 MHz
Channel No.	165 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11650	60.70	-0.42	V	60.28	73.98	13.70	PK
11650	48.30	-0.42	V	47.88	53.98	6.10	AV
17475	50.42	5.75	V	56.17	68.20	12.03	PK
11650	60.60	-0.42	H	60.18	73.98	13.80	PK
11650	47.59	-0.42	H	47.17	53.98	6.81	AV
17475	50.34	5.75	H	56.09	68.20	12.11	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11 n_20 MHz BW
Transfer MCS Index:	0
Operating Frequency	5765 MHz
Channel No.	153 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11530	60.20	0.24	V	60.44	73.98	13.54	PK
11530	48.06	0.24	V	48.30	53.98	5.68	AV
17235	58.80	4.46	V	63.26	68.20	4.94	PK
11530	59.13	0.24	H	59.37	73.98	14.61	PK
11530	46.38	0.24	H	46.62	53.98	7.36	AV
17235	58.84	4.46	H	63.30	68.20	4.90	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
5. We have done all data rate in 802.11n_20 MHz BW. Worst case is MCS0 in 802.11n_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11 n_20 MHz BW
Transfer MCS Index:	0
Operating Frequency	5785 MHz
Channel No.	157 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11570	59.06	-0.14	V	58.92	73.98	15.06	PK
11570	47.22	-0.14	V	47.08	53.98	6.90	AV
17355	59.21	4.61	V	63.82	68.20	4.38	PK
11570	58.51	-0.14	H	58.37	73.98	15.61	PK
11570	45.53	-0.14	H	45.39	53.98	8.59	AV
17355	58.86	4.61	H	63.47	68.20	4.73	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
5. We have done all data rate in 802.11n_20 MHz BW. Worst case is MCS0 in 802.11n_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11 n_20 MHz BW
Transfer MCS Index:	0
Operating Frequency	5825 MHz
Channel No.	165 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11650	60.11	-0.42	V	59.69	73.98	14.29	PK
11650	47.76	-0.42	V	47.34	53.98	6.64	AV
17475	49.58	5.75	V	55.33	73.98	18.65	PK
11650	59.69	-0.42	H	59.27	73.98	14.71	PK
11650	47.39	-0.42	H	46.97	53.98	7.01	AV
17475	49.54	5.75	H	55.29	73.98	18.69	PK

*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
5. We have done all data rate in 802.11n_20 MHz BW. Worst case is MCS0 in 802.11n_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

Band :	UNII 3
Operation Mode:	802.11n_40 MHz BW
Transfer MCS Index:	0
Operating Frequency	5795 MHz
Channel No.	159 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11590	60.17	-0.26	V	59.91	73.98	14.07	PK
11590	49.39	-0.26	V	49.13	53.98	4.85	AV
17385	48.42	5.20	V	53.62	68.20	14.58	PK
11590	59.72	-0.26	H	59.46	73.98	14.52	PK
11590	48.33	-0.26	H	48.07	53.98	5.91	AV
17385	48.10	5.20	H	53.30	68.20	14.90	PK


*AN. : Antenna Factor / CL : Cable Loss / Amp.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
5. We have done all data rate in 802.11n_40 MHz BW. Worst case is MCS0 in 802.11n_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)


■ **RESULT PLOTS**

Radiated Spurious Emissions plot –Peak Reading (802.11a, Ch.157 3rd Harmonic, X-V)

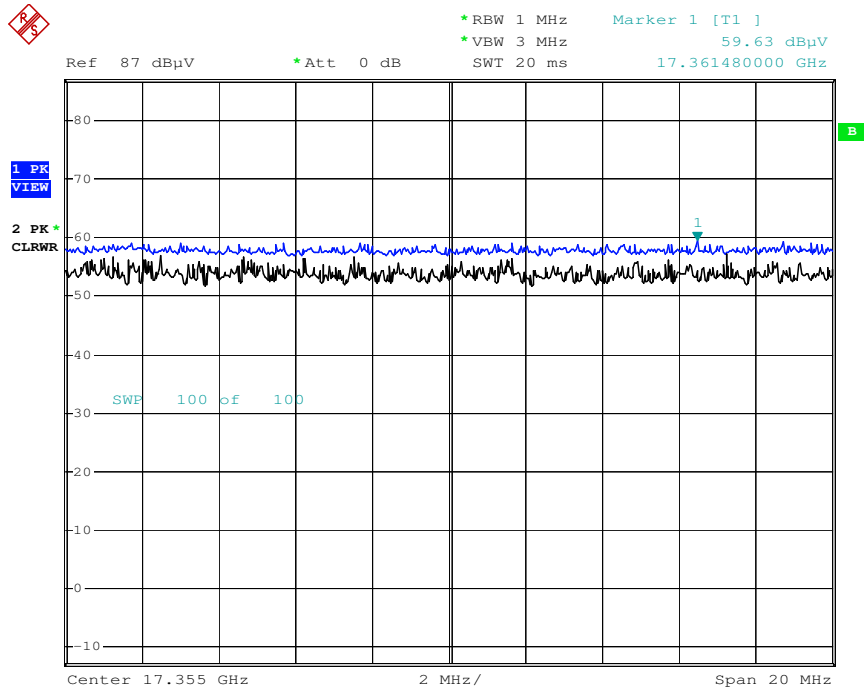


Date: 14.JUN.2016 06:44:59

Radiated Spurious Emissions plot – Peak Reading(802.11n_20M, Ch.157 3rd Harmonic, X-V)

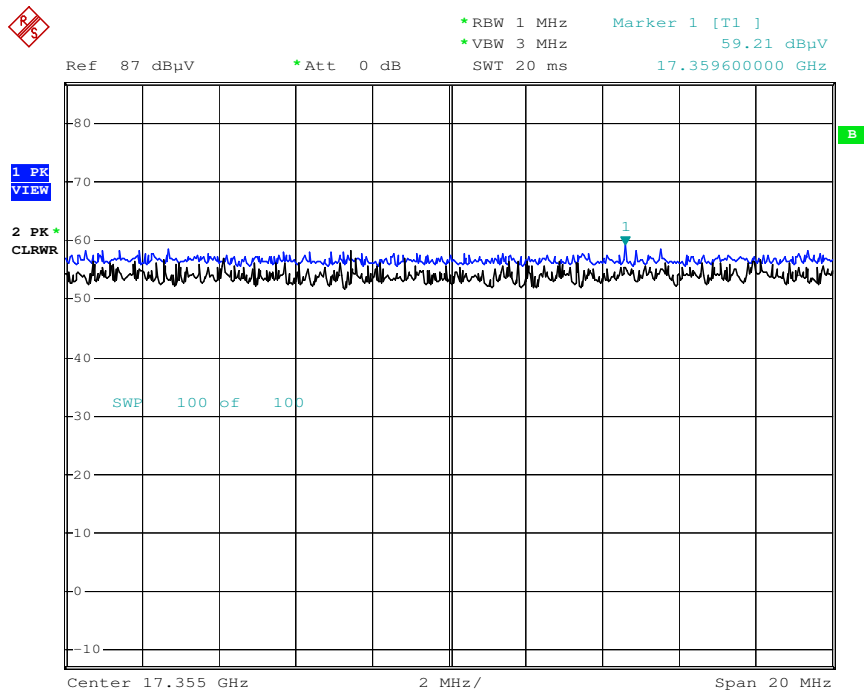


Date: 14.JUN.2016 06:46:09

Radiated Spurious Emissions plot – Average Reading (802.11n_40M, Ch.159 2nd Harmonic, X-V)

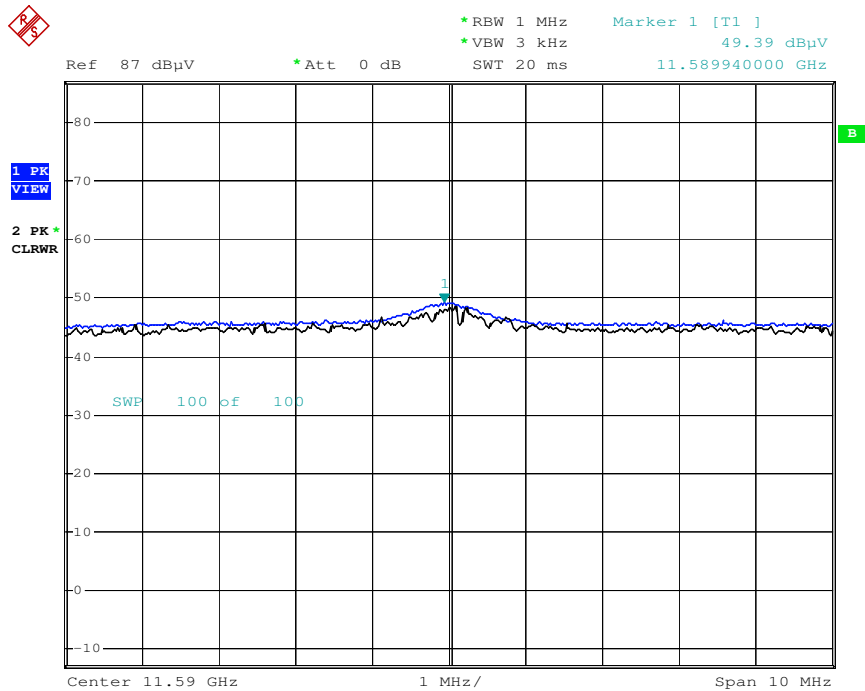

Date: 14.JUN.2016 06:49:17

Radiated Spurious Emissions plot –Peak Reading (802.11n_40M, Ch.159 2nd Harmonic, X-V)

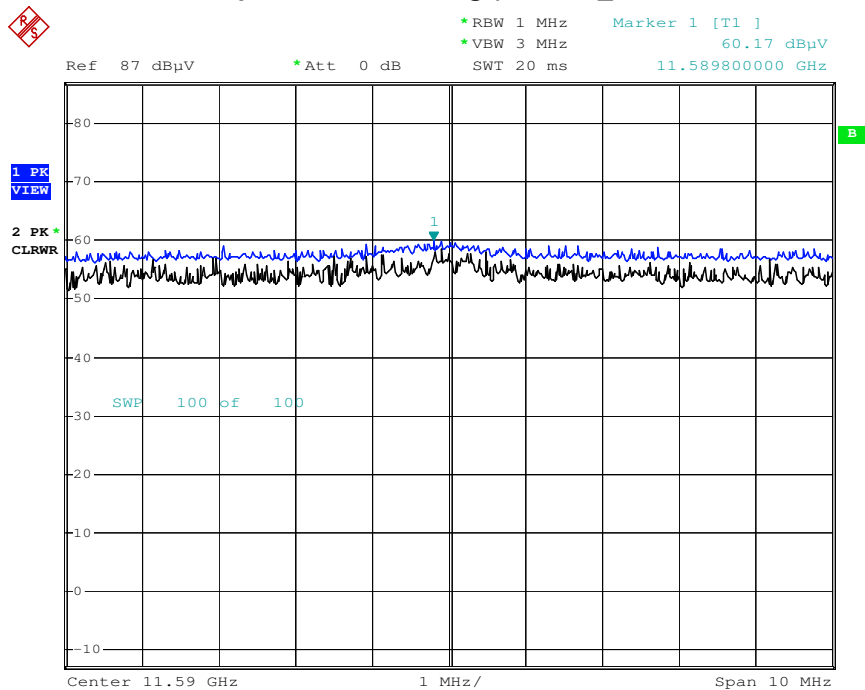

Date: 14.JUN.2016 06:50:13

Note : Only the worst case plots for Radiated Spurious Emissions.

9.6.2 RADIATED RESTRICTED BAND EDGE MEASUREMENTS

Test Requirements and limit, §15.247(d) §15.205, §15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	63.45	5.07	H	68.52	73.98	5.46	PK
5150	41.45	5.07	H	46.52	53.98	7.46	AV
5150	54.69	5.07	V	59.76	73.98	14.22	PK
5150	41.29	5.07	V	46.36	53.98	7.62	AV

Band :	UNII 1
Operation Mode:	802.11 n_20 MHz BW
Transfer MCS Index:	0
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	56.34	5.07	H	61.41	73.98	12.57	PK
5150	42.12	5.07	H	47.19	53.98	6.79	AV
5150	54.48	5.07	V	59.55	73.98	14.43	PK
5150	41.59	5.07	V	46.66	53.98	7.32	AV

Band :	UNII 1
Operation Mode:	802.11 n_40 MHz BW
Transfer MCS Index:	0
Operating Frequency	5190 MHz
Channel No.	38 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	61.91	5.07	H	66.98	73.98	7.00	PK
5150	46.05	5.07	H	51.12	53.98	2.86	AV
5150	58.27	5.07	V	63.34	73.98	10.64	PK
5150	44.05	5.07	V	49.12	53.98	4.86	AV

Band : UNII 3
 Operation Mode: 802.11 a
 Transfer Rate: 6 Mbps
 Operating Frequency 5765 MHz
 Channel No. 153 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5725	64.00	6.02	H	70.02	78.20	8.18	PK
5725	63.75	6.02	V	69.77	78.20	8.43	PK
5715	62.01	5.93	H	67.94	73.98	6.05	PK
5715	62.24	5.93	V	68.17	73.98	5.82	PK
5715	41.21	5.93	H	47.14	53.98	6.85	AV
5715	41.46	5.93	V	47.39	53.98	6.60	AV

Band : UNII 3
 Operation Mode: 802.11 a
 Transfer Rate: 6 Mbps
 Operating Frequency 5825 MHz
 Channel No. 165 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5850	65.11	6.34	H	71.45	78.20	6.75	PK
5850	67.33	6.34	V	73.67	78.20	4.53	PK
5860	56.66	6.36	H	63.02	68.20	5.18	PK
5860	60.10	6.36	V	66.46	73.98	7.52	PK
5860	41.02	6.36	V	47.38	53.98	6.60	AV

Band : UNII 3
 Operation Mode: 802.11 n_20MHz BW
 Transfer MCS Index: 0
 Operating Frequency 5765 MHz
 Channel No. 153 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5725	61.49	6.02	H	67.51	78.20	10.69	PK
5725	65.12	6.02	V	71.14	78.20	7.06	PK
5715	62.65	5.93	H	68.58	73.98	5.41	PK
5715	63.44	5.93	V	69.37	73.98	4.62	PK
5715	41.55	5.93	H	47.48	53.98	6.51	AV
5715	41.76	5.93	V	47.69	53.98	6.30	AV

Band : UNII 3
 Operation Mode: 802.11 n_20MHz BW
 Transfer MCS Index: 0
 Operating Frequency 5825 MHz
 Channel No. 165 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5850	65.08	6.34	H	71.42	78.20	6.78	PK
5850	68.35	6.34	V	74.69	78.20	3.51	PK
5860	60.65	6.36	H	67.01	73.98	6.97	PK
5860	57.83	6.36	V	64.19	68.20	4.01	PK

Band : UNII 3
 Operation Mode: 802.11 n_40 MHz BW
 Transfer MCS Index: 0
 Operating Frequency 5795 MHz
 Channel No. 159 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5725	58.60	6.02	H	64.62	78.20	13.58	PK
5725	58.51	6.02	V	64.53	78.20	13.67	PK
5715	54.50	5.93	H	60.43	68.20	7.78	PK
5715	55.32	5.93	V	61.25	68.20	6.96	PK

Band : UNII 3
 Operation Mode: 802.11 n_40 MHz BW
 Transfer MCS Index: 0
 Operating Frequency 5795 MHz
 Channel No. 159 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. +D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5850	61.33	6.34	H	67.67	78.20	10.53	PK
5850	62.12	6.34	V	68.46	78.20	9.74	PK
5860	58.37	6.36	H	64.73	68.20	3.47	PK
5860	58.34	6.36	V	64.70	68.20	3.50	PK

II. MEASUREMENT PROCEDURES

G. Unwanted Emission Measurement


2. Unwanted Emissions that fall Outside of the Restricted Bands

c) At frequencies above 1000 MHz, use the procedure for maximum emissions described in section II.G.5., "Procedure for Unwanted Maximum Unwanted Emissions Measurements Above 1000 MHz".

As specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.


RESULT PLOTS

Radiated Restricted Band Edges plot – Average Reading (802.11a, Ch.165, z-V)

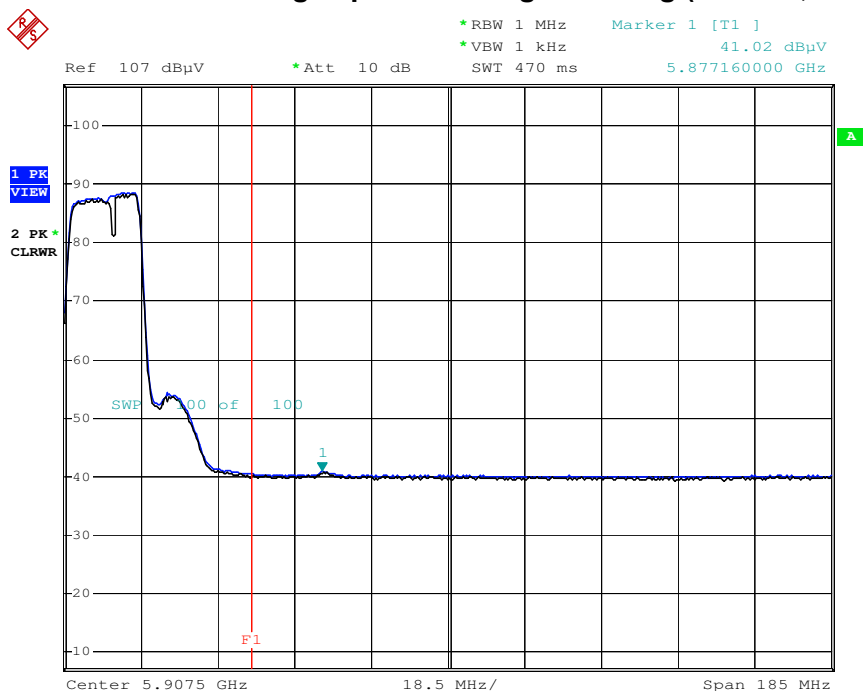


Date: 14.JUN.2016 03:30:45

Radiated Restricted Band Edges plot – Peak Reading (802.11a, Ch.165, z-V)

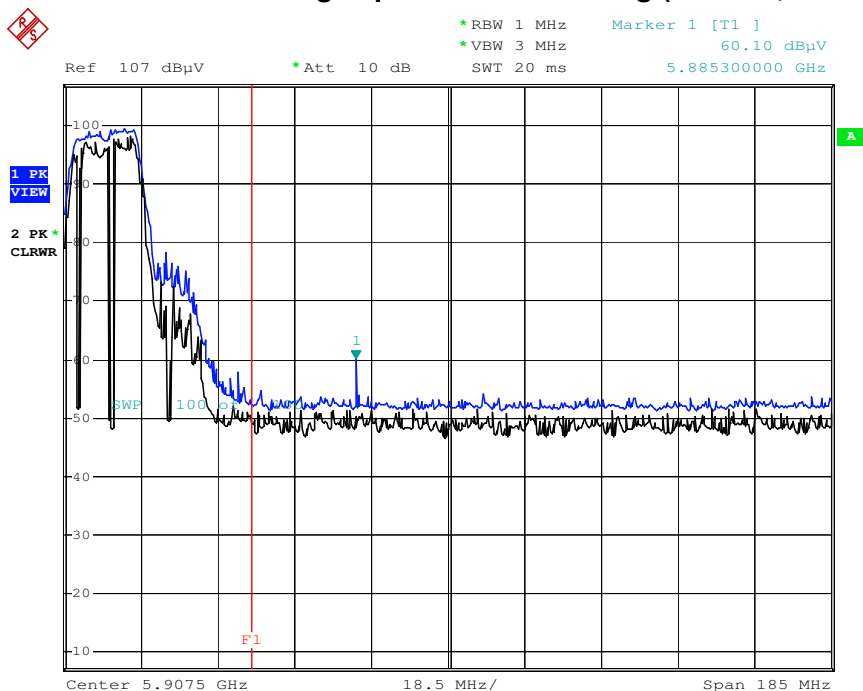


Date: 14.JUN.2016 03:27:31

Radiated Restricted Band Edges plot – Peak Reading (802.11n_20M, Ch.165, z-V)

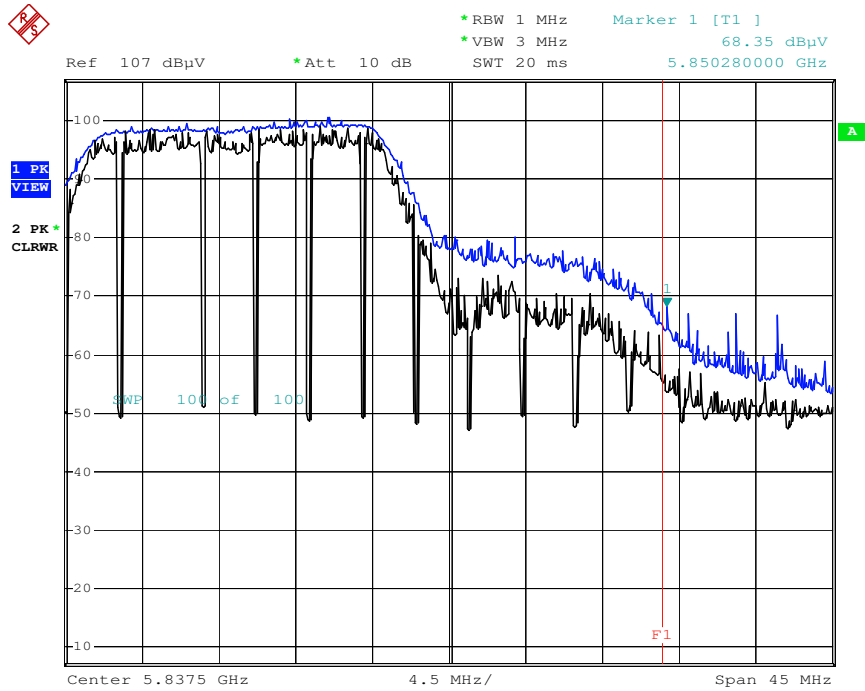


Date: 14.JUN.2016 03:33:34

Radiated Restricted Band Edges plot – Average Reading (802.11n_40M, Ch.38, x-H)

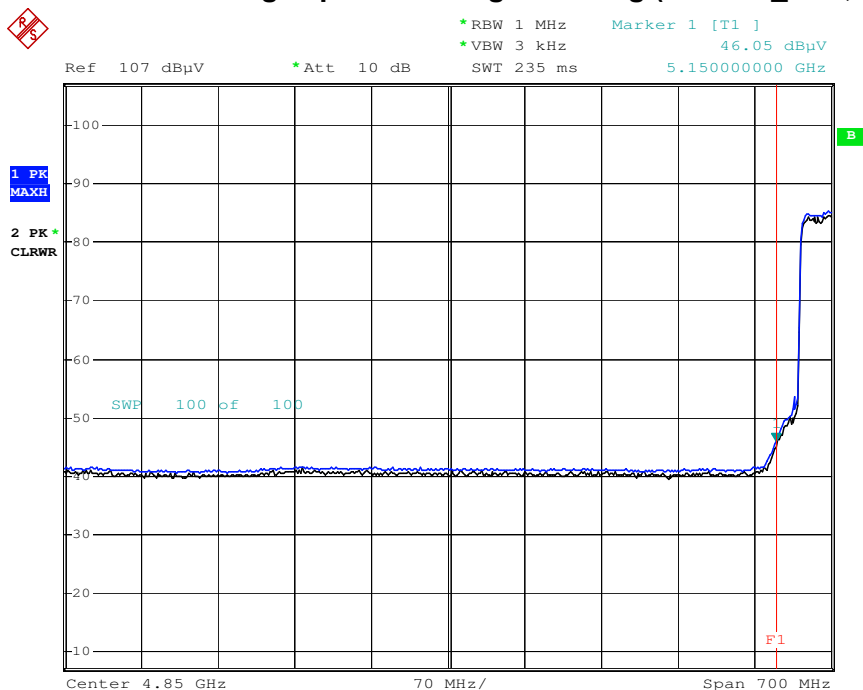

Radiated Restricted Band Edges plot – Peak Reading (802.11n_40M, Ch.38, x-H)

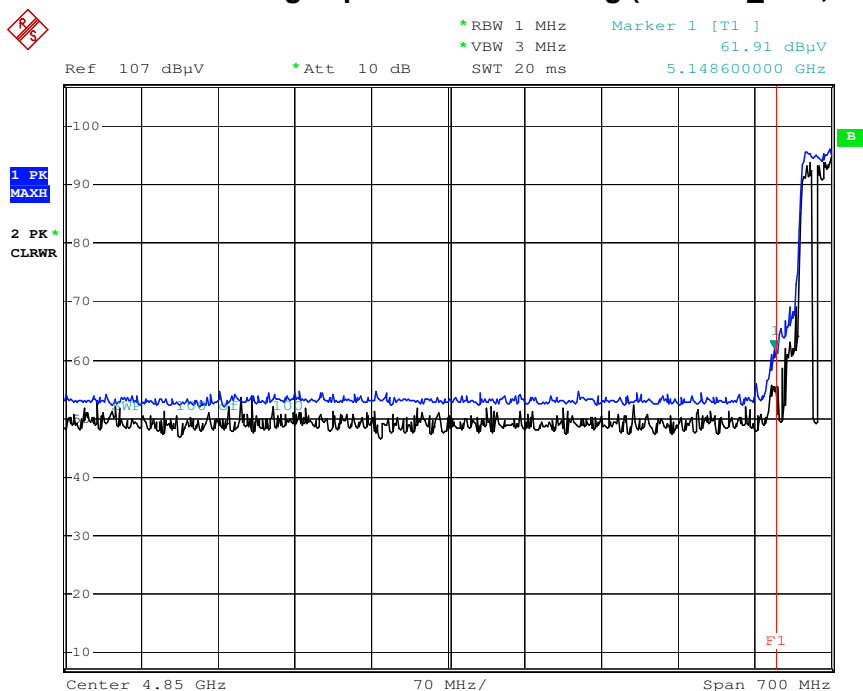

9.7 POWERLINE CONDUCTED EMISSIONS

Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference groundplane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

10. LIST OF TEST EQUIPMENT

10.1 LIST OF TEST EQUIPMENT(Conducted Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	12/28/2015	Annual	100073
Rohde & Schwarz	ESCI / Test Receiver	12/28/2015	Annual	100584
Agilent	N9020A / Signal Analyzer	06/30/2015	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	11/24/2015	Annual	MY49431210
Agilent	N1911A / Power Meter	03/11/2016	Annual	MY45100523
Agilent	N1921A / Power Sensor	03/11/2016	Annual	MY52260025
Agilent	87300B / Directional Coupler	11/30/2015	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	06/14/2016	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	03/09/2016	Annual	KR75303962
Agilent	8493C / Attenuator(10 dB)	07/21/2015	Annual	07560

10.2 LIST OF TEST EQUIPMENT(Radiated Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	MA4000-EP / Antenna Position Tower	N/A	N/A	N/A
Innco system	CT0800 / Turn Table	N/A	N/A	N/A
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
ETS	2090 / Controller(Turn table)	N/A	N/A	1646
Rohde & Schwarz	Loop Antenna	02/23/2016	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	04/15/2015	Biennial	255
Schwarzbeck	BBHA 9120D / Horn Antenna	08/26/2014	Biennial	9120D-1300
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	09/03/2015	Biennial	BBHA9170541
Rohde & Schwarz	FSP / Spectrum Analyzer	10/05/2015	Annual	836650/016
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/23/2015	Annual	101068-SZ
Wainwright Instruments	WHKX10-2700-3000-18000-40SS / High Pass Filter	08/20/2015	Annual	4
Wainwright Instruments	WHKX8-6090-7000-18000-40SS / High Pass Filter	08/03/2015	Annual	5
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	07/06/2015	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	01/26/2016	Annual	2
H.P.	8491A / Attenuator(10 dB)	08/11/2015	Annual	18593
CERNEX	CBLU1183540 / Power Amplifier	02/01/2016	Annual	24614
CERNEX	CBL06185030 / Power Amplifier	02/01/2016	Annual	24615
CERNEX	CBL18265035 / Power Amplifier	07/27/2015	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	07/09/2015	Annual	25956