



12 CHANNEL HORIZONTAL

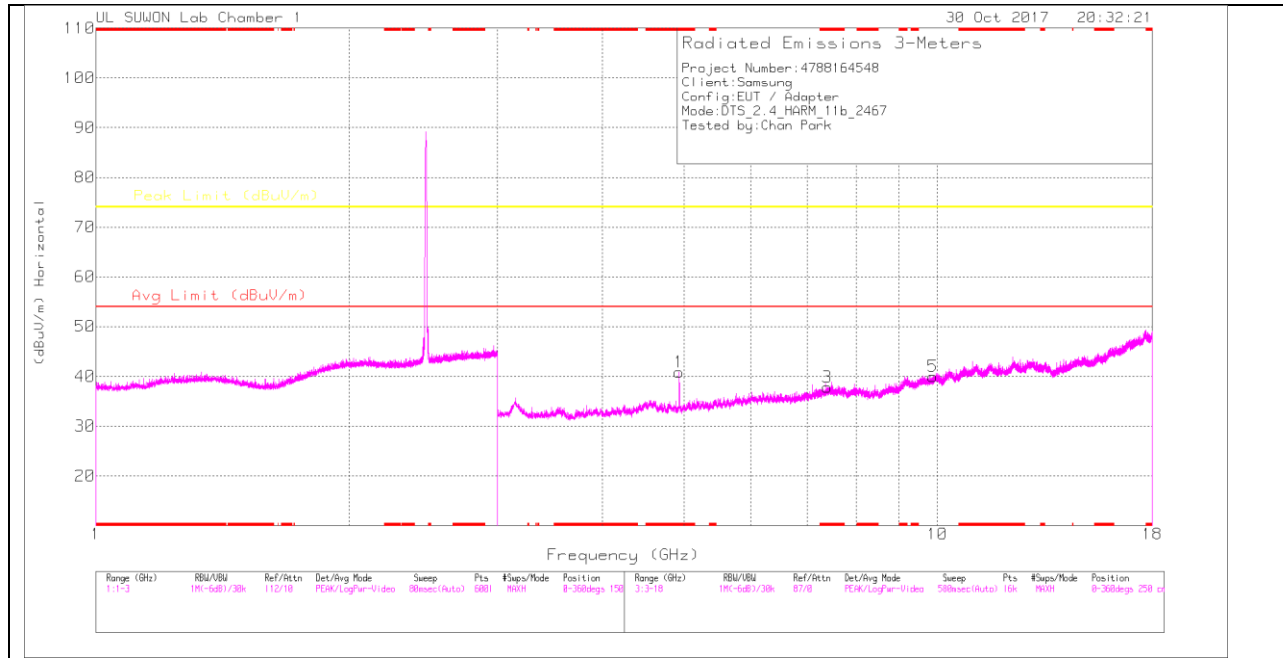

12 CHANNEL VERTICAL

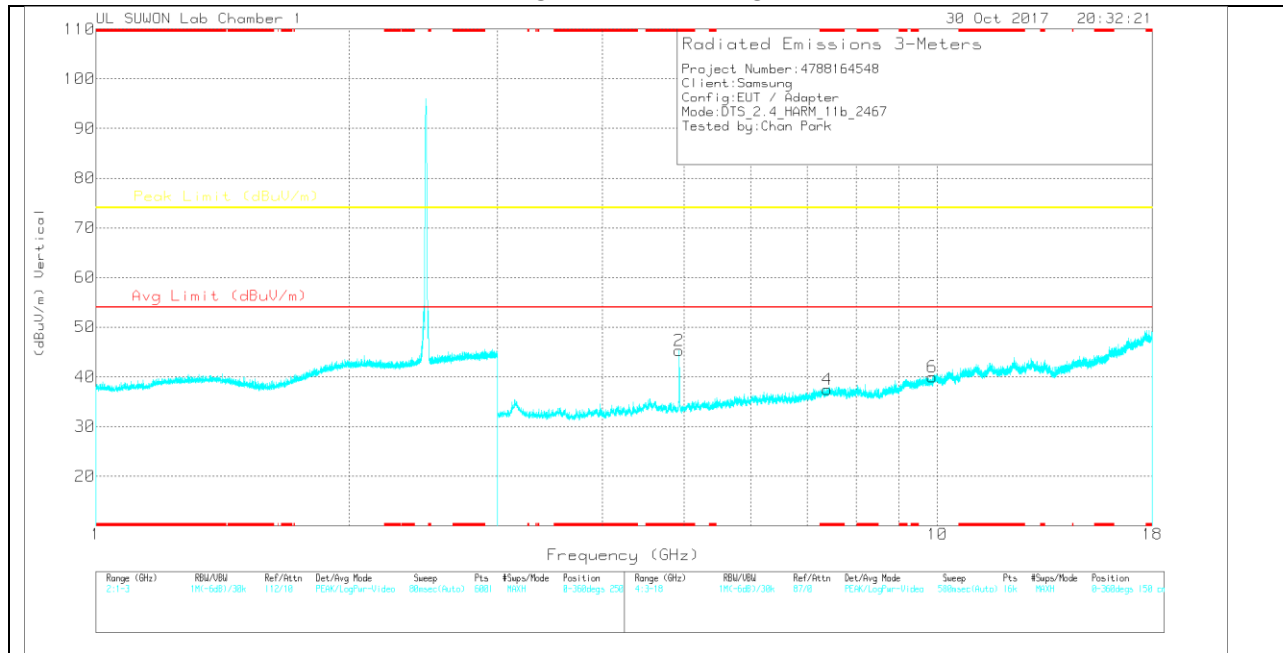

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

12 CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_001687_17	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.934	38.91	PK	33.8	-31.8	0	40.91	-	-	74	-33.09	0-360	150	H
3	* 7.403	29.04	PK	35.9	-27.1	0	37.84	-	-	74	-36.16	0-360	150	H
5	9.871	26.07	PK	37	-23.1	0	39.97	-	-	74	-34.03	0-360	150	H
2	* 4.934	43.34	PK	33.8	-31.8	0	45.34	-	-	74	-28.66	0-360	250	V
4	* 7.403	28.62	PK	35.9	-27.1	0	37.42	-	-	74	-36.58	0-360	150	V
6	9.865	26.2	PK	37	-23.2	0	40	-	-	74	-34	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.934	45.84	PK2	33.8	-31.8	0	47.84	-	-	74	-26.16	177	141	H
* 4.934	40.45	MAv1	33.8	-31.8	0	42.45	54	-11.55	-	-	177	141	H
* 4.934	49.45	PK2	33.8	-31.8	0	51.45	-	-	74	-22.55	197	200	V
* 4.934	42.36	MAv1	33.8	-31.8	0	44.36	54	-9.64	-	-	197	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

13 CHANNEL HORIZONTAL

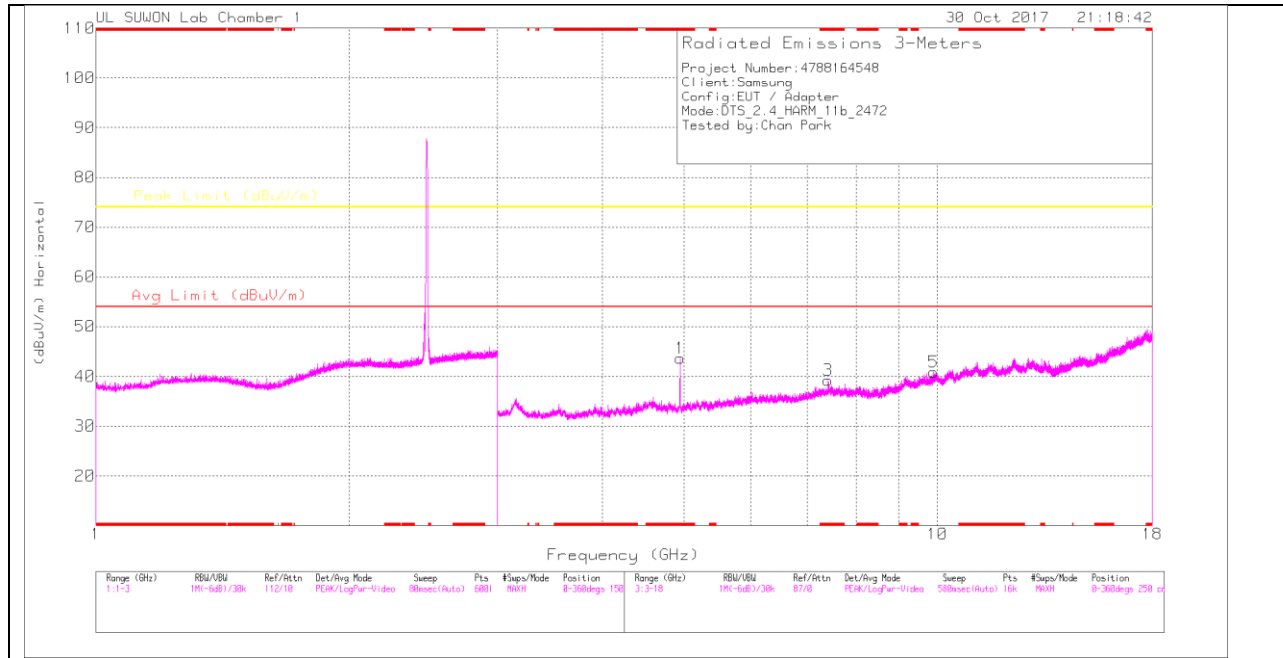

13 CHANNEL VERTICAL

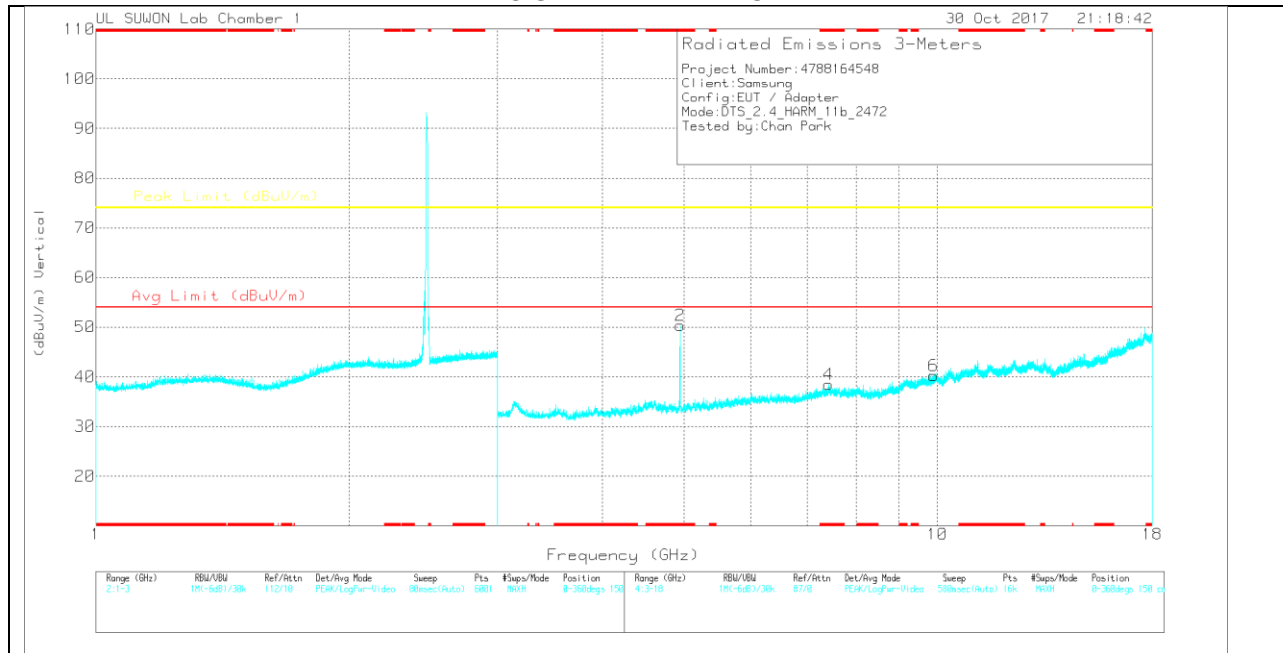

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

13 CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_001687_17	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.943	41.53	PK	33.8	-31.7	0	43.63	-	-	74	-30.37	0-360	150	H
3	* 7.415	30.43	PK	35.9	-27.1	0	39.23	-	-	74	-34.77	0-360	150	H
5	9.888	26.59	PK	37.1	-22.8	0	40.89	-	-	74	-33.11	0-360	250	H
2	* 4.943	48.29	PK	33.8	-31.7	0	50.39	-	-	74	-23.61	0-360	250	V
4	* 7.417	29.58	PK	35.9	-27	0	38.48	-	-	74	-35.52	0-360	150	V
6	9.888	25.94	PK	37.1	-22.8	0	40.24	-	-	74	-33.76	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.944	45.88	PK2	33.8	-31.8	0	47.88	-	-	74	-26.12	55	264	H
* 4.944	40.1	MAv1	33.8	-31.8	0	42.1	54	-11.9	-	-	55	264	H
* 4.944	51.29	PK2	33.8	-31.8	0	53.29	-	-	74	-20.71	183	210	V
* 4.944	46.78	MAv1	33.8	-31.8	0	48.78	54	-5.22	-	-	183	210	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

10.2.3. TX ABOVE 1 GHz 802.11g 2TX CDD MODE IN THE 2.4 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

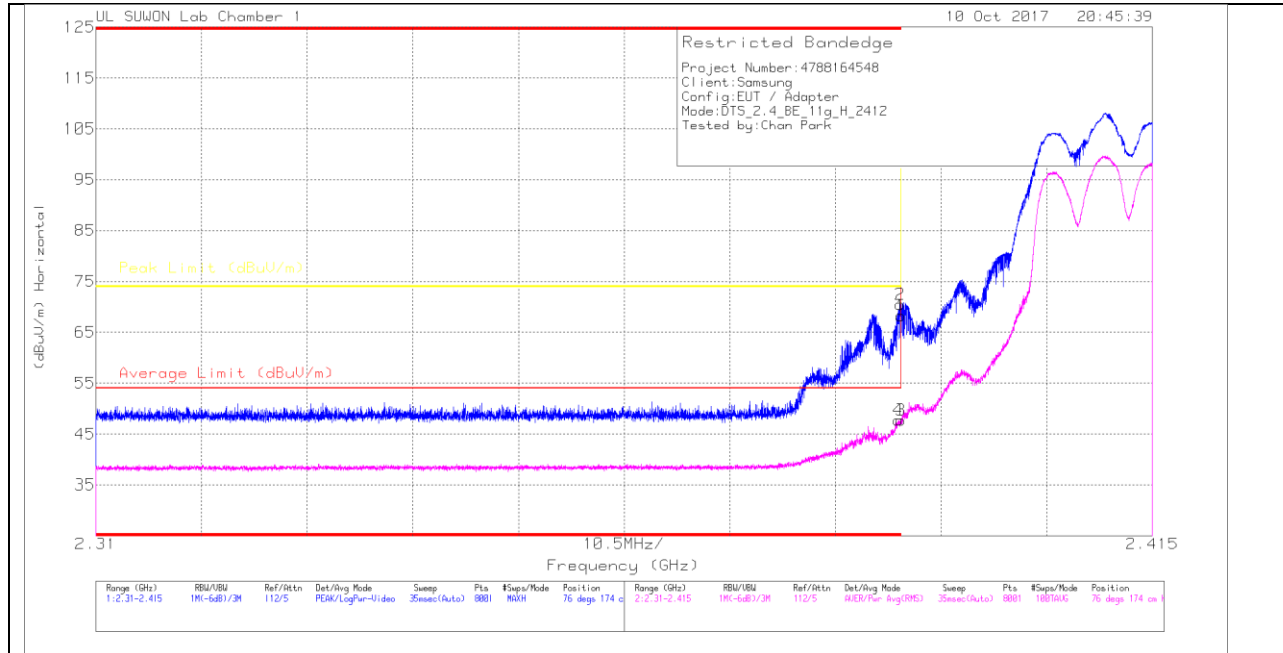

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168 717	10dB_ATT(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.39	62.71	Pk	31.3	-25.7	0	68.31	-	-	74	-5.69	76	174	H
2	* 2.39	64.84	Pk	31.3	-25.7	0	70.44	-	-	74	-3.56	76	174	H
3	* 2.39	41.9	RMS	31.3	-25.7	.3	47.80	54	-6.20	-	-	76	174	H
4	* 2.39	41.9	RMS	31.3	-25.7	.3	47.80	54	-6.20	-	-	76	174	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

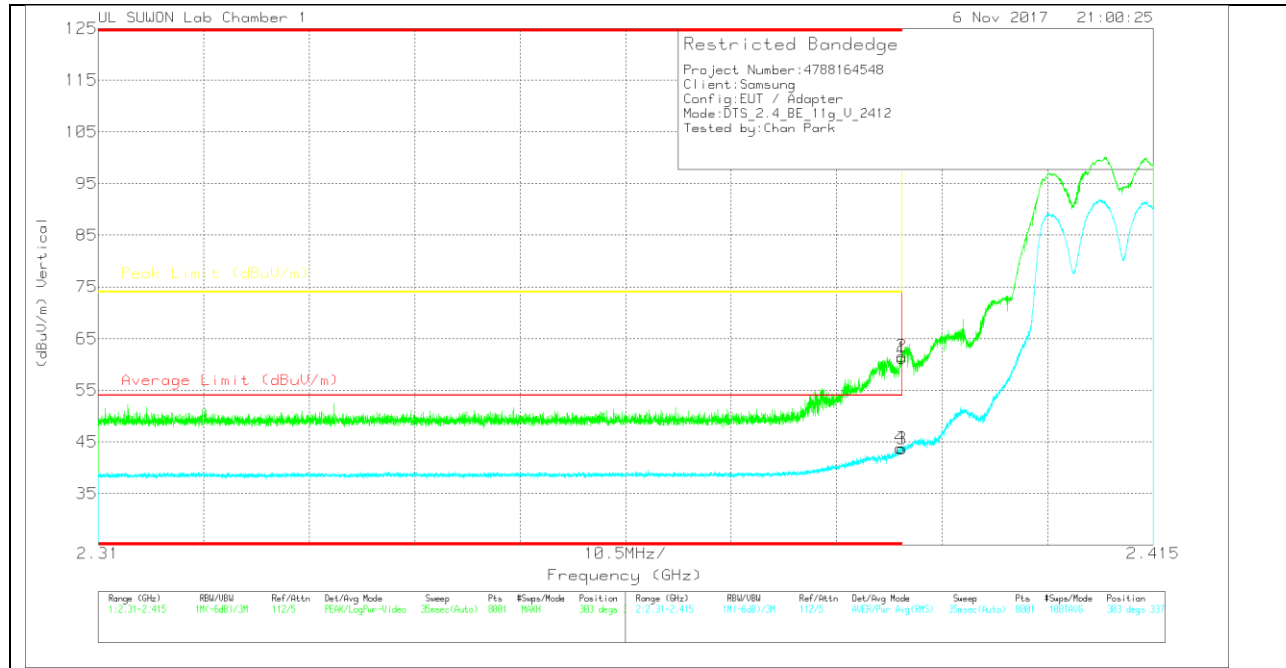

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168 717	10dB_ATT(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	55.61	Pk	31.3	-25.7	0	61.21	-	-	74	-12.79	303	337	V
2	* 2.39	56.01	Pk	31.3	-25.7	0	61.61	-	-	74	-12.39	303	337	V
3	* 2.39	37.8	RMS	31.3	-25.7	.3	43.7	54	-10.3	-	-	303	337	V
4	* 2.39	37.95	RMS	31.3	-25.7	.3	43.85	54	-10.15	-	-	303	337	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

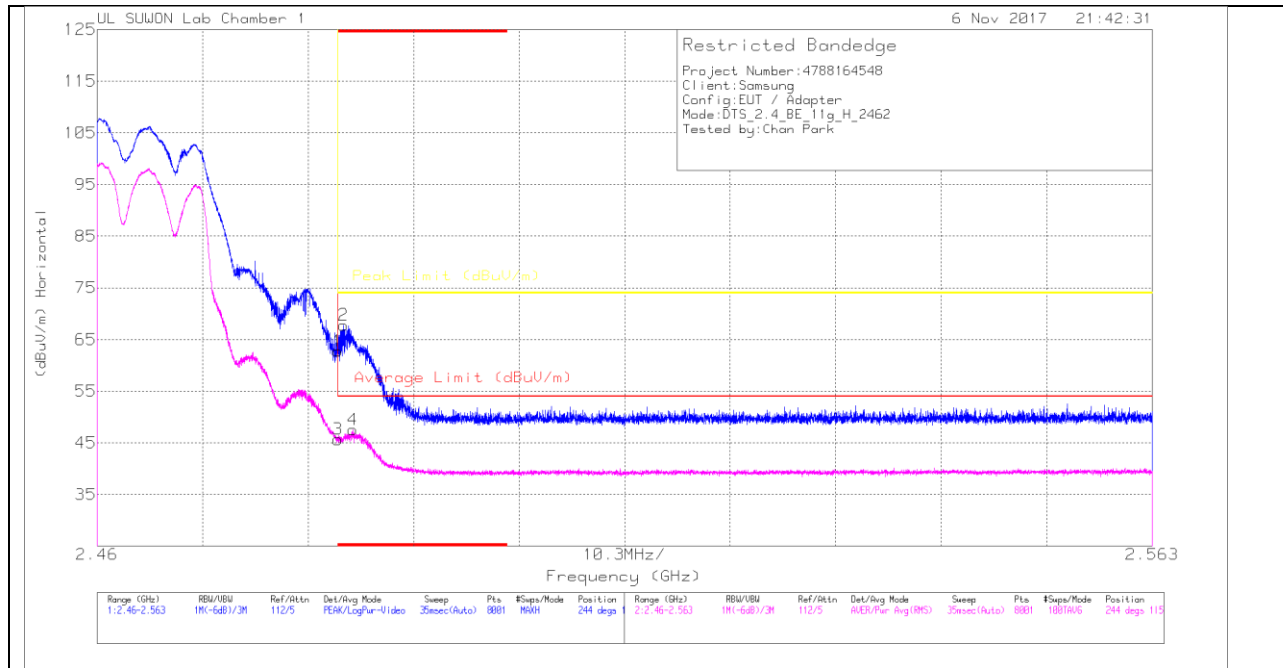

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168 717	10dB_ATT(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.484	56.66	Pk	31.6	-25.5	0	62.76	-	-	74	-11.24	244	115	H
2	* 2.484	61.68	Pk	31.6	-25.5	0	67.78	-	-	74	-6.22	244	115	H
3	* 2.484	39.29	RMS	31.6	-25.5	.3	45.69	54	-8.31	-	-	244	115	H
4	* 2.485	41.14	RMS	31.6	-25.5	.3	47.54	54	-6.46	-	-	244	115	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

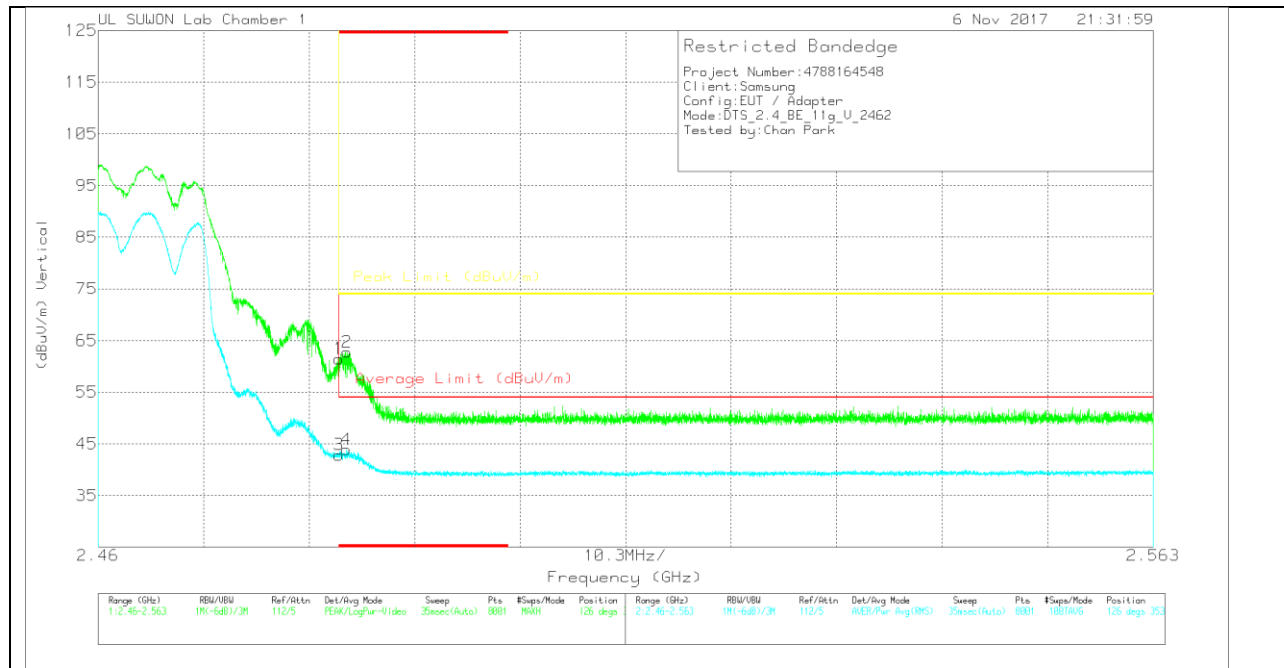

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168 717	10dB_ATT(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Pk Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.484	55.38	Pk	31.6	-25.5	0	61.48	-	-	74	-12.52	126	353	V
2	* 2.484	56.68	Pk	31.6	-25.5	0	62.78	-	-	74	-11.22	126	353	V
3	* 2.484	36.48	RMS	31.6	-25.5	.3	42.88	54	-11.12	-	-	126	353	V
4	* 2.484	37.51	RMS	31.6	-25.5	.3	43.91	54	-10.09	-	-	126	353	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (12 CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

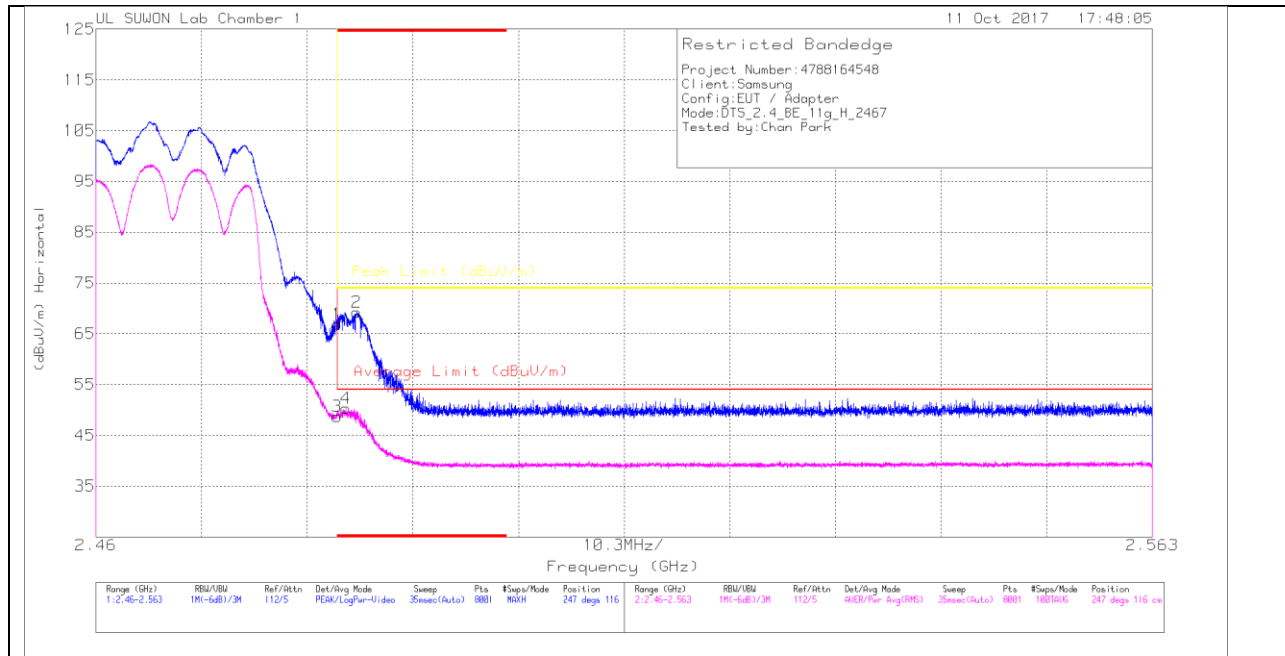

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168 717	10dB_ATT(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.484	60.77	Pk	31.6	-25.5	0	66.87	-	-	74	-7.13	247	116	H
2	* 2.485	63.11	Pk	31.6	-25.5	0	69.21	-	-	74	-4.79	247	116	H
3	* 2.484	42.34	RMS	31.6	-25.5	.3	48.74	54	-5.26	-	-	247	116	H
4	* 2.484	43.95	RMS	31.6	-25.5	.3	50.35	54	-3.65	-	-	247	116	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

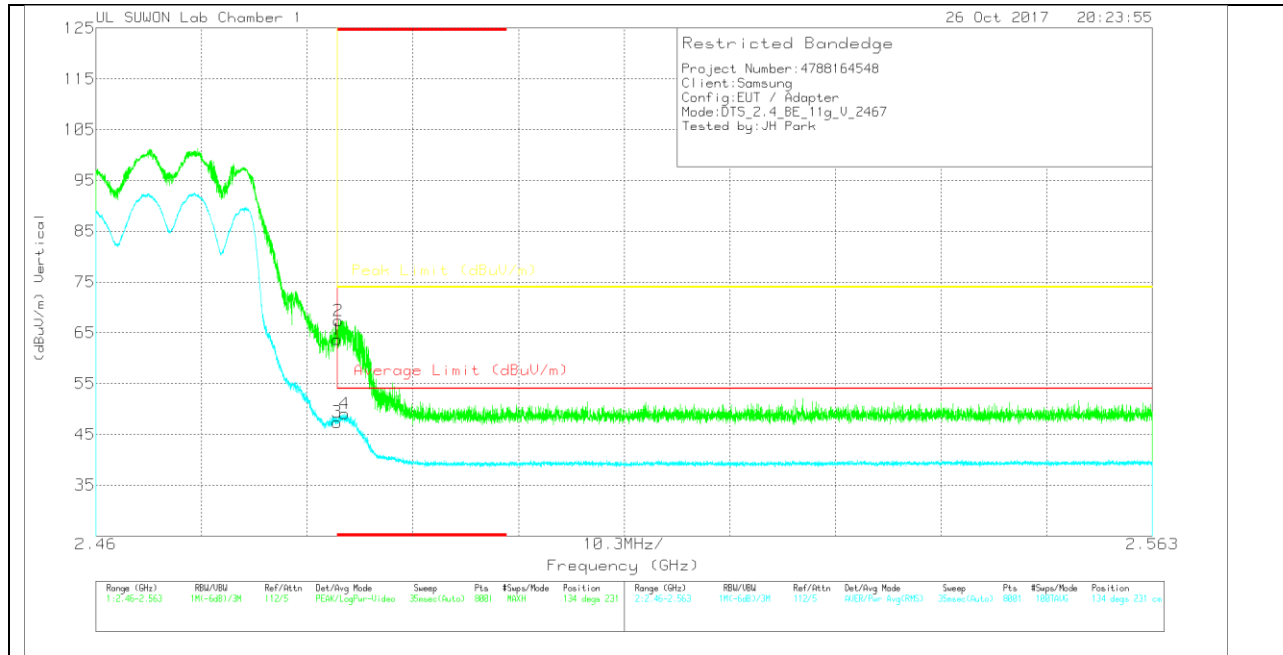

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00108 717	10dB_ATT(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.484	57.62	Pk	31.6	-25.5	0	63.72	-	-	74	-10.28	134	231	V
2	* 2.484	61.35	Pk	31.6	-25.5	0	67.45	-	-	74	-6.55	134	231	V
3	* 2.484	41.02	RMS	31.6	-25.5	.3	47.42	54	-6.58	-	-	134	231	V
4	* 2.484	42.68	RMS	31.6	-25.5	.3	49.08	54	-4.92	-	-	134	231	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (13 CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

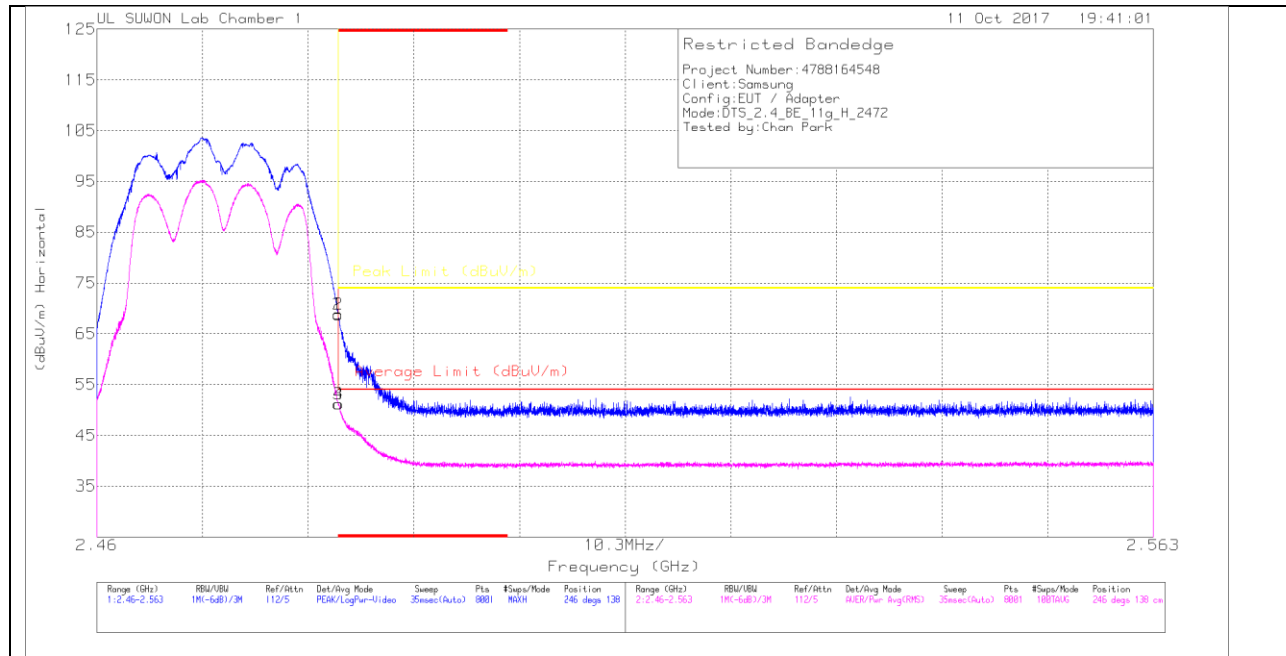

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00108 717	10dB_ATT(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.484	62.72	Pk	31.6	-25.5	0	68.82	-	-	74	-5.18	246	138	H
2	* 2.484	62.76	Pk	31.6	-25.5	0	68.86	-	-	74	-5.14	246	138	H
3	* 2.484	44.88	RMS	31.6	-25.5	.3	51.28	54	-2.72	-	-	246	138	H
4	* 2.484	44.87	RMS	31.6	-25.5	.3	51.27	54	-2.73	-	-	246	138	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

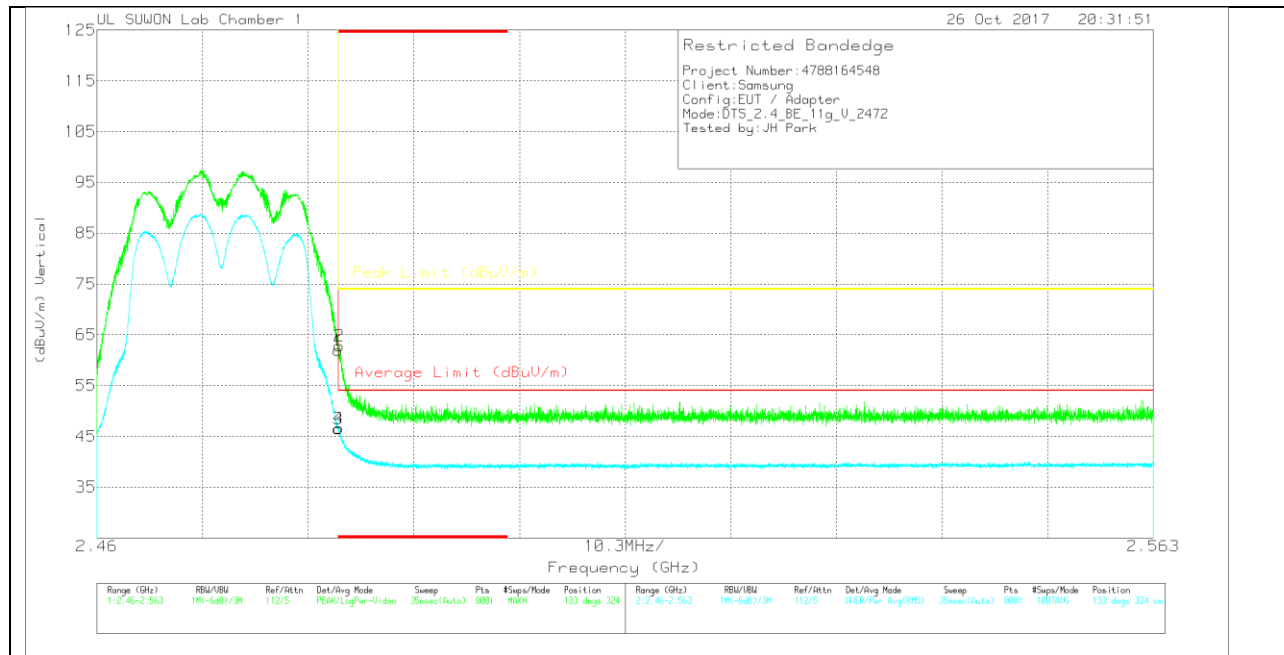

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00108 717	10dB_ATT(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.484	55.91	Pk	31.6	-25.5	0	62.01	-	-	74	-11.99	133	324	V
2	* 2.484	56.69	Pk	31.6	-25.5	0	62.79	-	-	74	-11.21	133	324	V
3	* 2.484	40.13	RMS	31.6	-25.5	.3	46.53	54	-7.47	-	-	133	324	V
4	* 2.484	40.23	RMS	31.6	-25.5	.3	46.63	54	-7.37	-	-	133	324	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS ANTENNA1

LOW CHANNEL HORIZONTAL

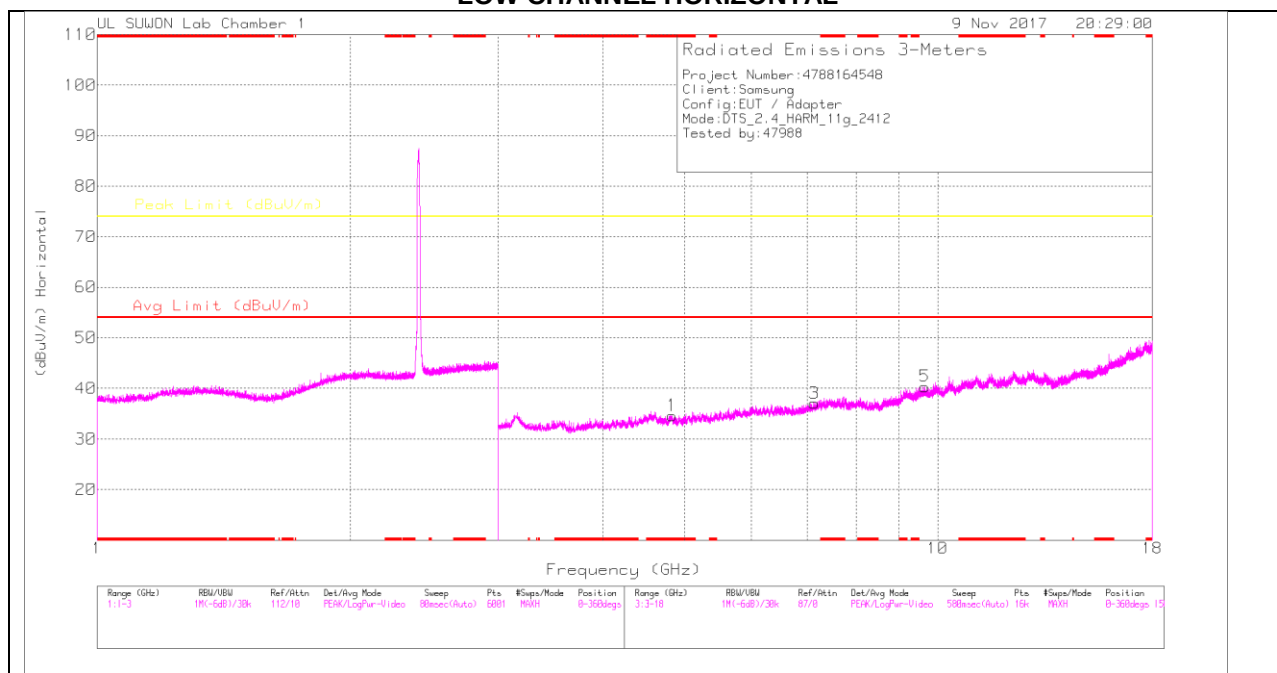

LOW CHANNEL VERTICAL

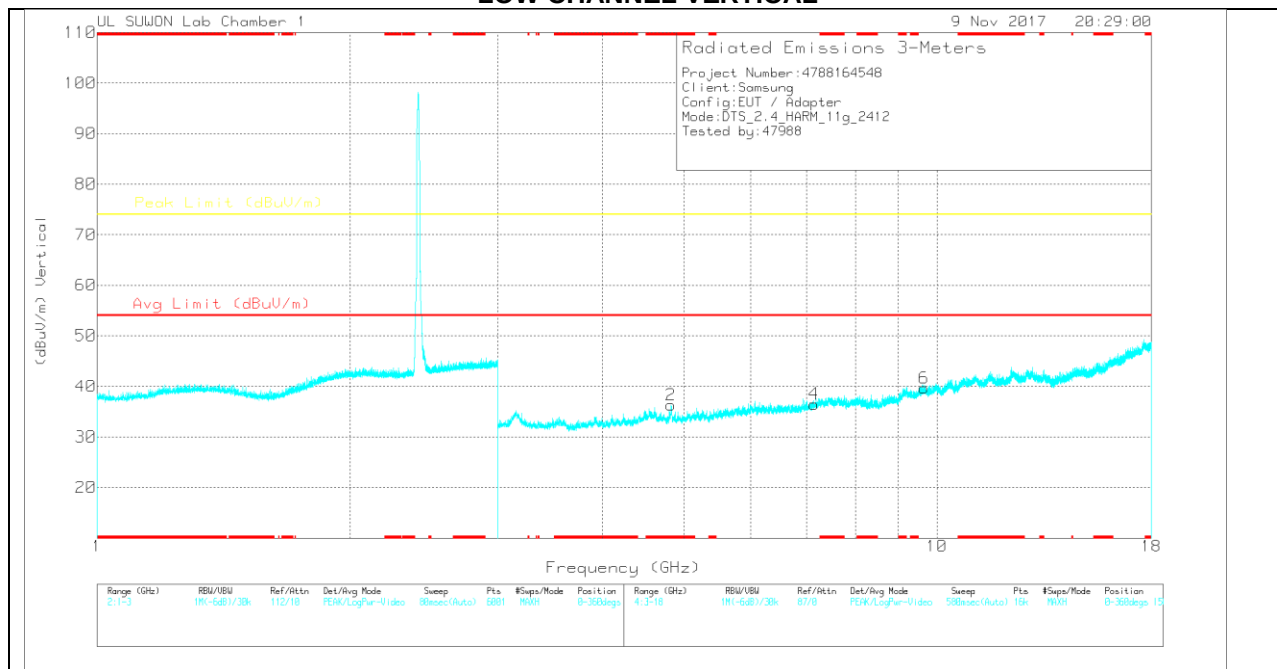

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_001687_17	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.831	32.4	PK	33.8	-31.6	0	34.6	-	-	74	-39.4	0-360	150	H
3	7.134	29.36	PK	35.8	-28.1	0	37.06	-	-	74	-36.94	0-360	150	H
5	9.647	27.26	PK	36.8	-23.7	0	40.36	-	-	74	-33.64	0-360	250	H
2	* 4.824	34.12	PK	33.8	-31.6	0	36.32	-	-	74	-37.68	0-360	250	V
4	7.141	28.78	PK	35.8	-28.1	0	36.48	-	-	74	-37.52	0-360	250	V
6	9.655	26.57	PK	36.8	-23.7	0	39.67	-	-	74	-34.33	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.829	42.76	PK2	33.8	-31.6	0	44.96	-	-	74	-29.04	73	153	H
* 4.83	30.48	MAv1	33.8	-31.6	.3	32.98	54	-21.02	-	-	73	153	H
* 4.831	44.34	PK2	33.8	-31.6	0	46.54	-	-	74	-27.46	192	207	V
* 4.827	32.23	MAv1	33.8	-31.6	.3	34.73	54	-19.27	-	-	192	207	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL HORIZONTAL

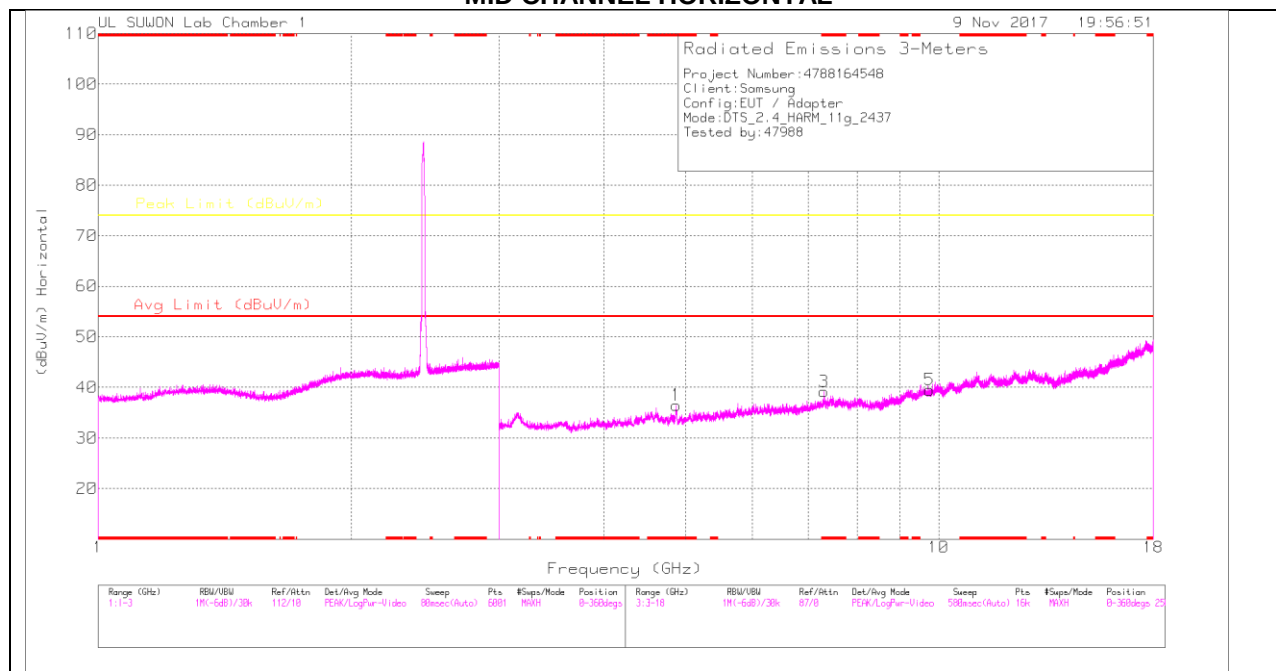

MID CHANNEL VERTICAL

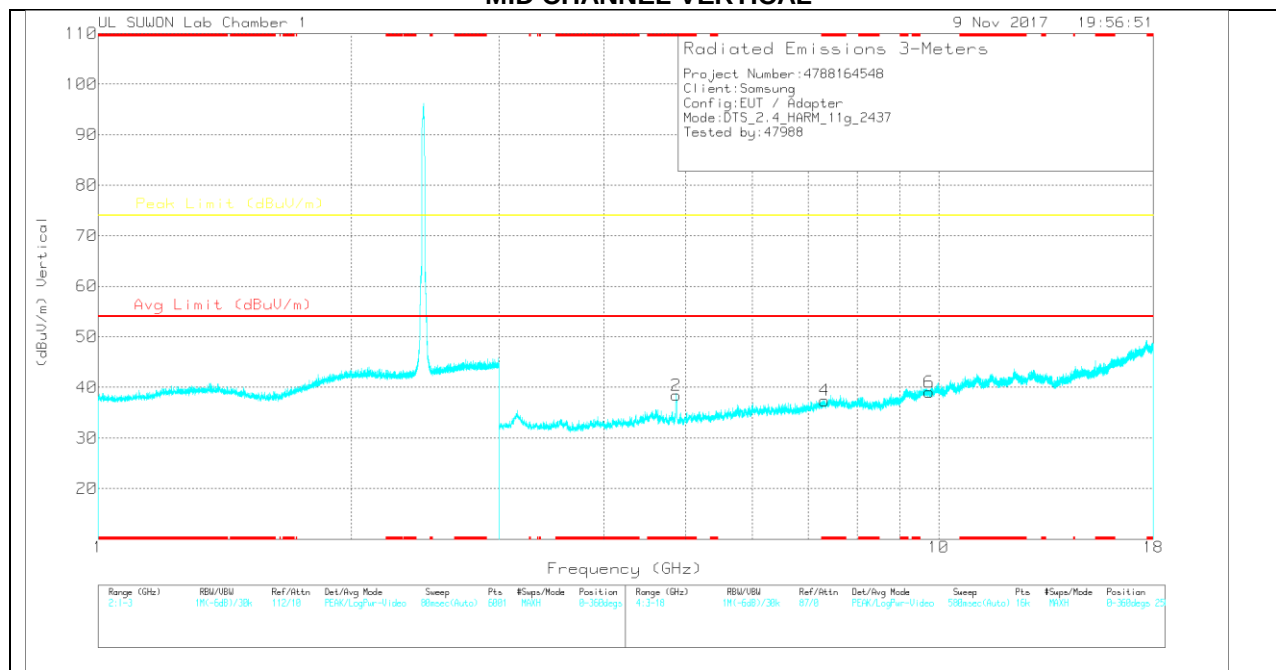

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_001687_17	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.873	34.36	PK	33.8	-31.7	0	36.46	-	-	74	-37.54	0-360	150	H
3	* 7.305	30.94	PK	35.9	-27.7	0	39.14	-	-	74	-34.86	0-360	250	H
5	9.753	26.79	PK	36.9	-24.2	0	39.49	-	-	74	-34.51	0-360	250	H
2	* 4.876	36.32	PK	33.8	-31.7	0	38.42	-	-	74	-35.58	0-360	250	V
4	* 7.312	29.08	PK	35.9	-27.6	0	37.38	-	-	74	-36.62	0-360	250	V
6	9.743	26.35	PK	36.9	-24.2	0	39.05	-	-	74	-34.95	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.874	44.2	PK2	33.8	-31.7	0	46.3	-	-	74	-27.7	78	165	H
* 4.876	31.66	MAv1	33.8	-31.7	.3	34.06	54	-19.94	-	-	78	165	H
* 4.873	45.15	PK2	33.8	-31.7	0	47.25	-	-	74	-26.75	147	188	V
* 4.875	32.5	MAv1	33.8	-31.7	.3	34.9	54	-19.1	-	-	147	188	V
* 7.316	40.23	PK2	35.9	-27.6	0	48.53	-	-	74	-25.47	47	150	H
* 7.313	27.75	MAv1	35.9	-27.6	.3	36.35	54	-17.65	-	-	47	150	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL HORIZONTAL

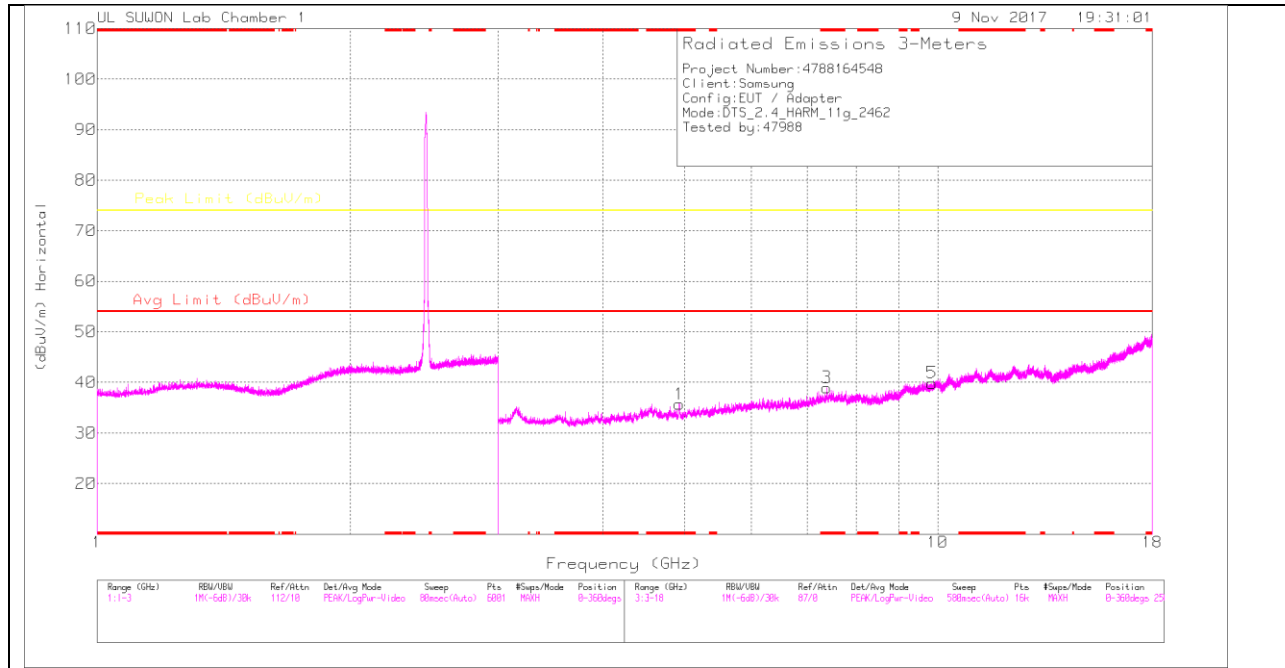

HIGH CHANNEL VERTICAL

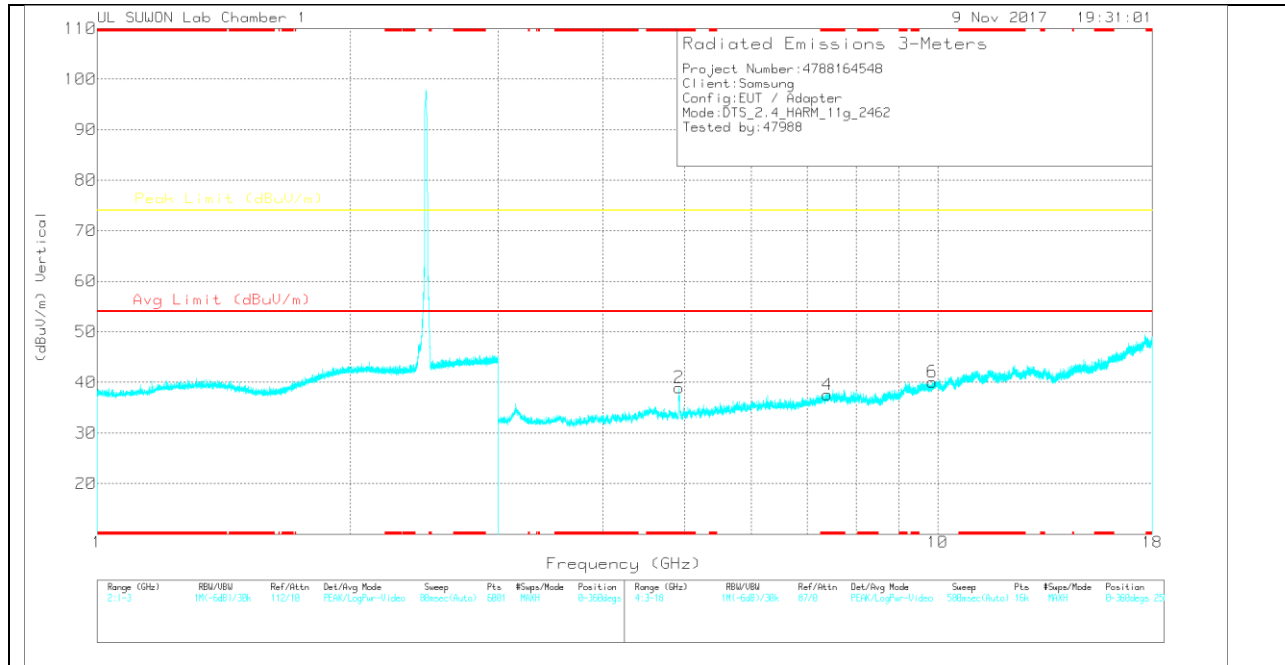

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_001687_17	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.928	33.69	PK	33.8	-31.8	0	35.69	-	-	74	-38.31	0-360	250	H
3	* 7.383	30.26	PK	35.9	-27.2	0	38.96	-	-	74	-35.04	0-360	150	H
5	9.843	26.36	PK	37	-23.5	0	39.86	-	-	74	-34.14	0-360	150	H
2	* 4.926	36.96	PK	33.8	-31.8	0	38.96	-	-	74	-35.04	0-360	250	V
4	* 7.387	28.84	PK	35.9	-27.2	0	37.54	-	-	74	-36.46	0-360	250	V
6	9.847	26.48	PK	37	-23.4	0	40.08	-	-	74	-33.92	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.927	44.03	PK2	33.8	-31.8	0	46.03	-	-	74	-27.97	78	189	H
* 4.927	31.97	MAv1	33.8	-31.8	.3	34.27	54	-19.73	-	-	78	189	H
* 4.929	46.42	PK2	33.8	-31.8	0	48.42	-	-	74	-25.58	185	286	V
* 4.926	34.66	MAv1	33.8	-31.8	.3	36.96	54	-17.04	-	-	185	286	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

12 CHANNEL HORIZONTAL

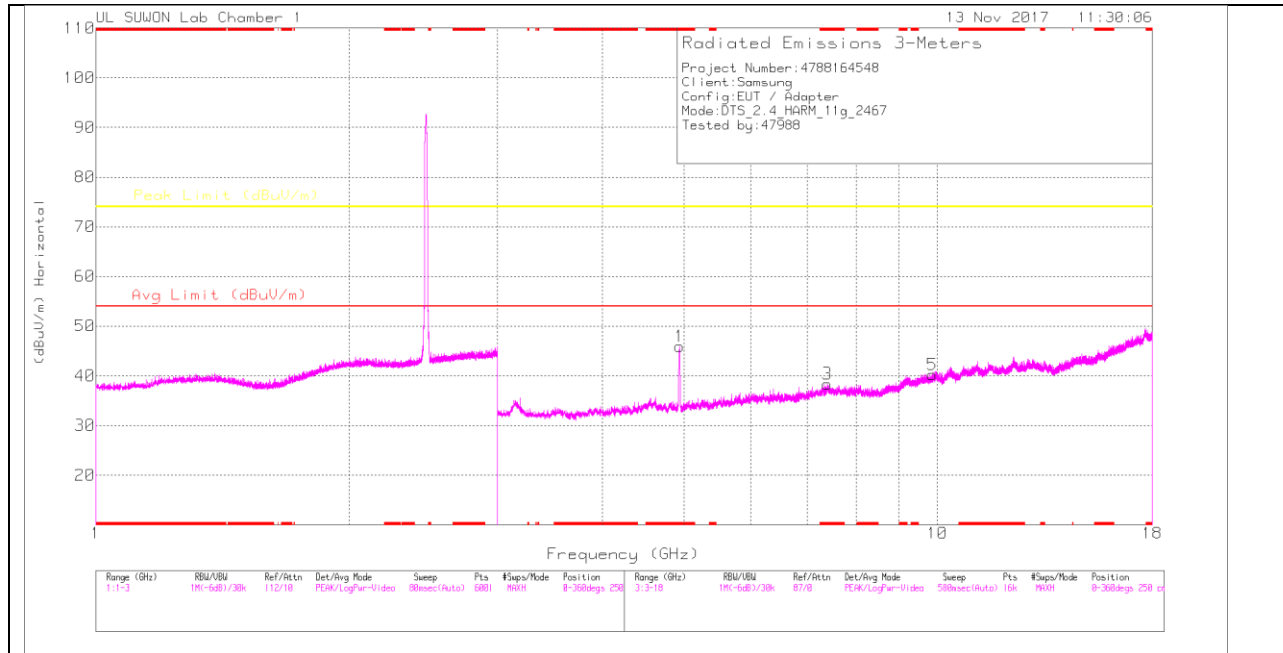

12 CHANNEL VERTICAL

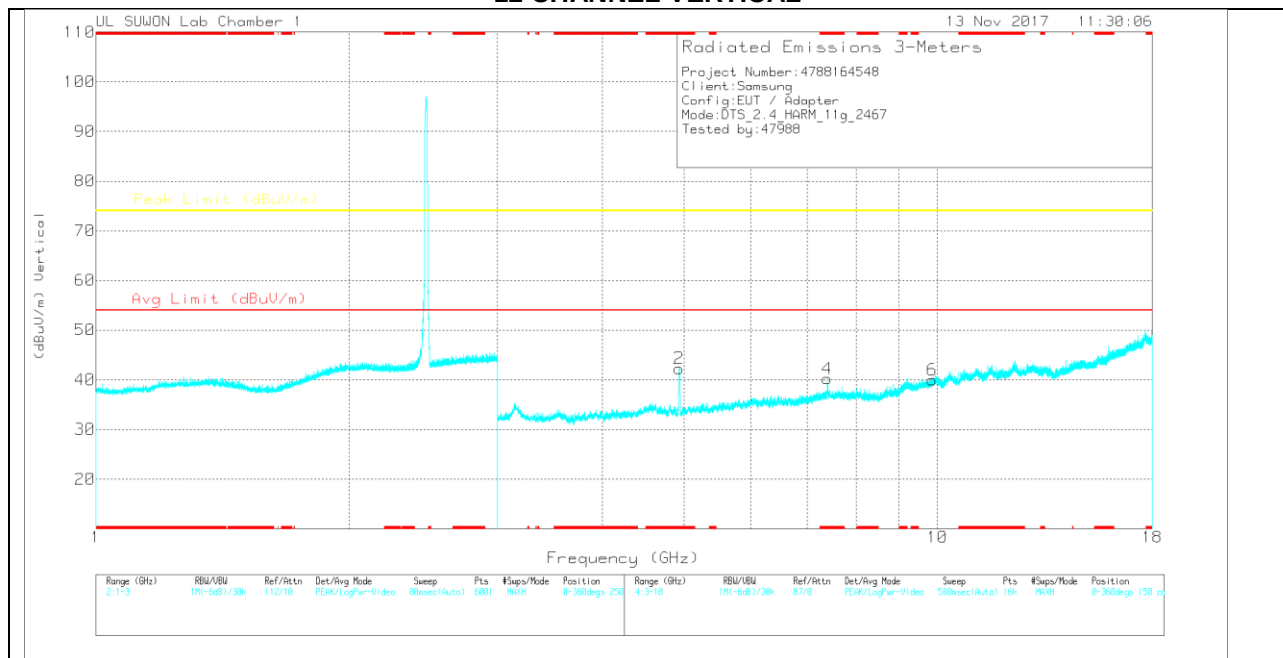

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

12 CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_001687_17	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.935	43.92	PK	33.8	-31.8	0	45.92	-	-	74	-28.08	0-360	250	H
3	* 7.399	29.6	PK	35.9	-27.1	0	38.4	-	-	74	-35.6	0-360	150	H
5	9.86	26.5	PK	37	-23.3	0	40.2	-	-	74	-33.8	0-360	150	H
2	* 4.931	40.32	PK	33.8	-31.8	0	42.32	-	-	74	-31.68	0-360	150	V
4	* 7.398	31.53	PK	35.9	-27.2	0	40.23	-	-	74	-33.77	0-360	250	V
6	9.86	26.32	PK	37	-23.3	0	40.02	-	-	74	-33.98	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.937	47.63	PK2	33.8	-31.7	0	49.73	-	-	74	-24.27	252	101	H
* 4.934	40.55	MAv1	33.8	-31.8	.3	42.85	54	-11.15	-	-	252	101	H
* 7.405	40.95	PK2	35.9	-27.1	0	49.75	-	-	74	-24.25	201	322	H
* 7.398	27.2	MAv1	35.9	-27.1	.3	36.3	54	-17.7	-	-	201	322	H
* 4.937	54.29	PK2	33.8	-31.7	0	56.39	-	-	74	-17.61	97	162	V
* 4.934	39.8	MAv1	33.8	-31.8	.3	42.1	54	-11.9	-	-	97	162	V
* 7.402	42.74	PK2	35.9	-27.1	0	51.54	-	-	74	-22.46	162	227	V
* 7.401	28.94	MAv1	35.9	-27.1	.3	38.04	54	-15.96	-	-	162	227	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak


MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS ANTENNA2

LOW CHANNEL HORIZONTAL

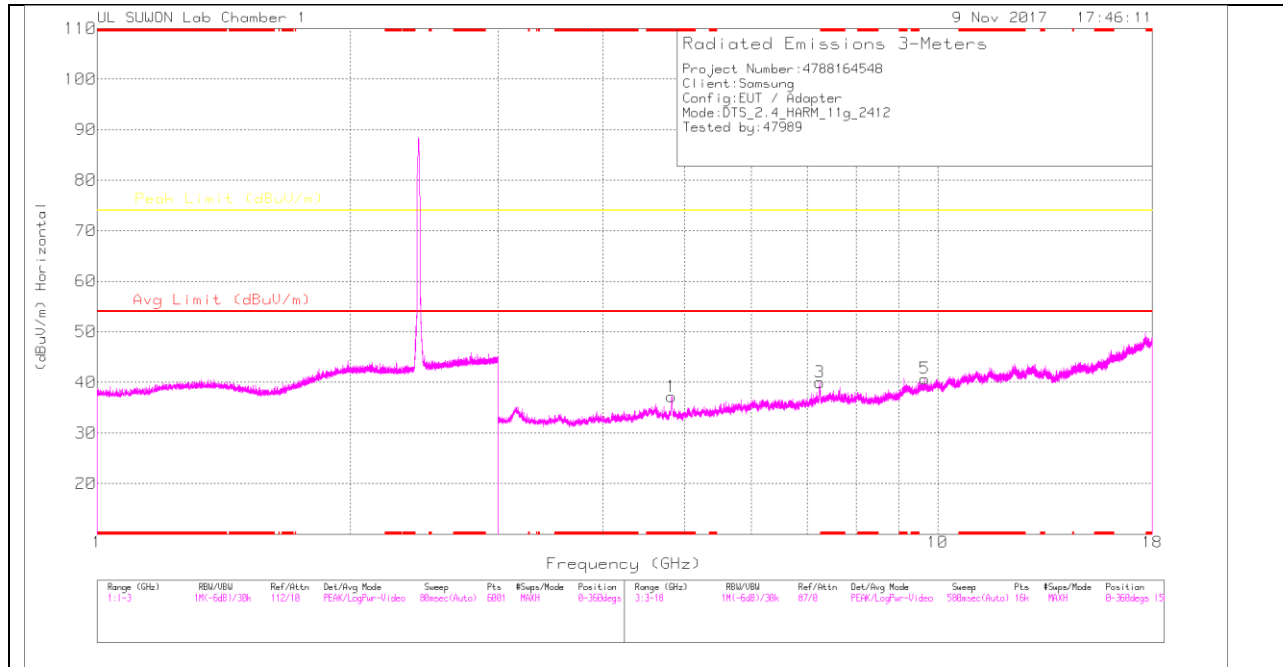

LOW CHANNEL VERTICAL

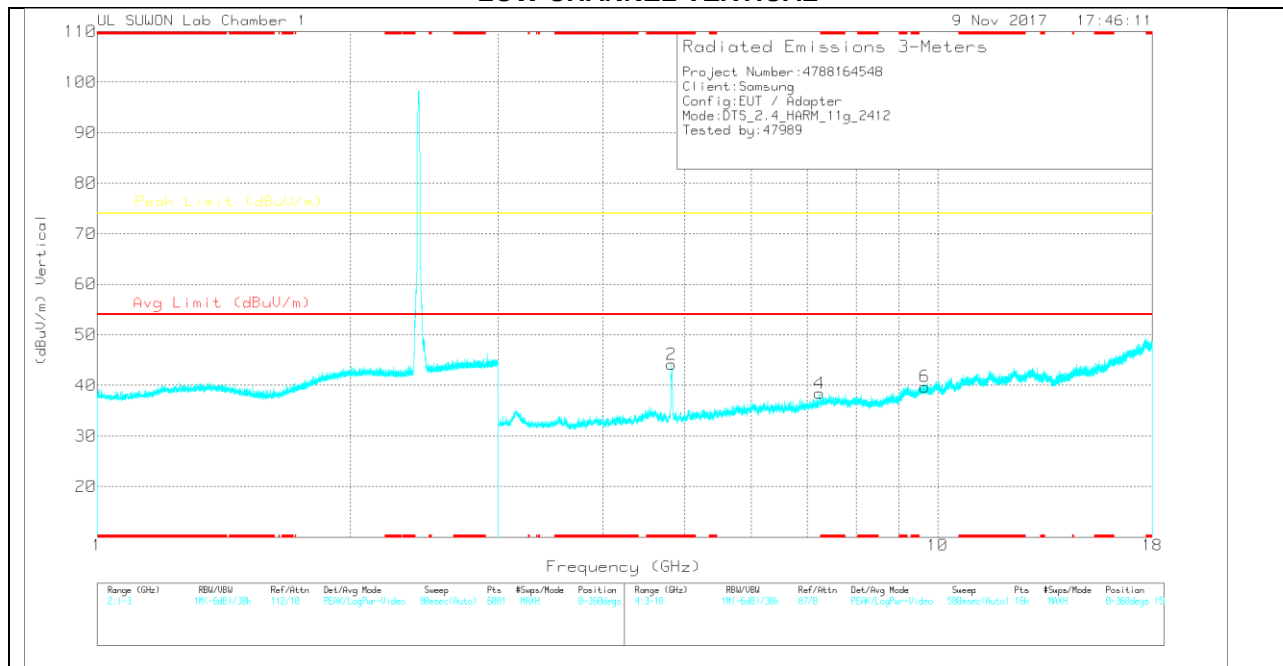

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_001687 17	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.826	34.98	PK	33.8	-31.6	0	37.18	-	-	74	-36.82	0-360	150	H
3	7.239	32.1	PK	35.9	-28	0	40	-	-	74	-34	0-360	150	H
5	9.654	27.63	PK	36.8	-23.7	0	40.73	-	-	74	-33.27	0-360	250	H
2	* 4.826	41.94	PK	33.8	-31.6	0	44.14	-	-	74	-29.86	0-360	150	V
4	7.234	30.52	PK	35.9	-28	0	38.42	-	-	74	-35.58	0-360	150	V
6	9.646	26.63	PK	36.8	-23.7	0	39.73	-	-	74	-34.27	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.823	46.08	PK2	33.8	-31.6	0	48.28	-	-	74	-25.72	126	377	H
* 4.829	51.72	PK2	33.8	-31.6	0	53.92	-	-	74	-20.08	180	159	V
* 4.826	40.29	MAv1	33.8	-31.6	.3	42.79	54	-11.21	-	-	180	159	V
* 4.826	33.53	MAv1	33.8	-31.6	.3	36.03	54	-17.97	-	-	126	377	H
7.239	41.76	PK2	35.9	-28	0	49.66	-	-	74	-24.34	183	172	H
7.239	41.57	PK2	35.9	-28	0	49.47	-	-	74	-24.53	217	280	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak


MAv1 - KDB558074 Option 1 Maximum RMS Average

Note: Frequency range 7239MHz is non-restricted band so only peak measurement was performed .

MID CHANNEL HORIZONTAL

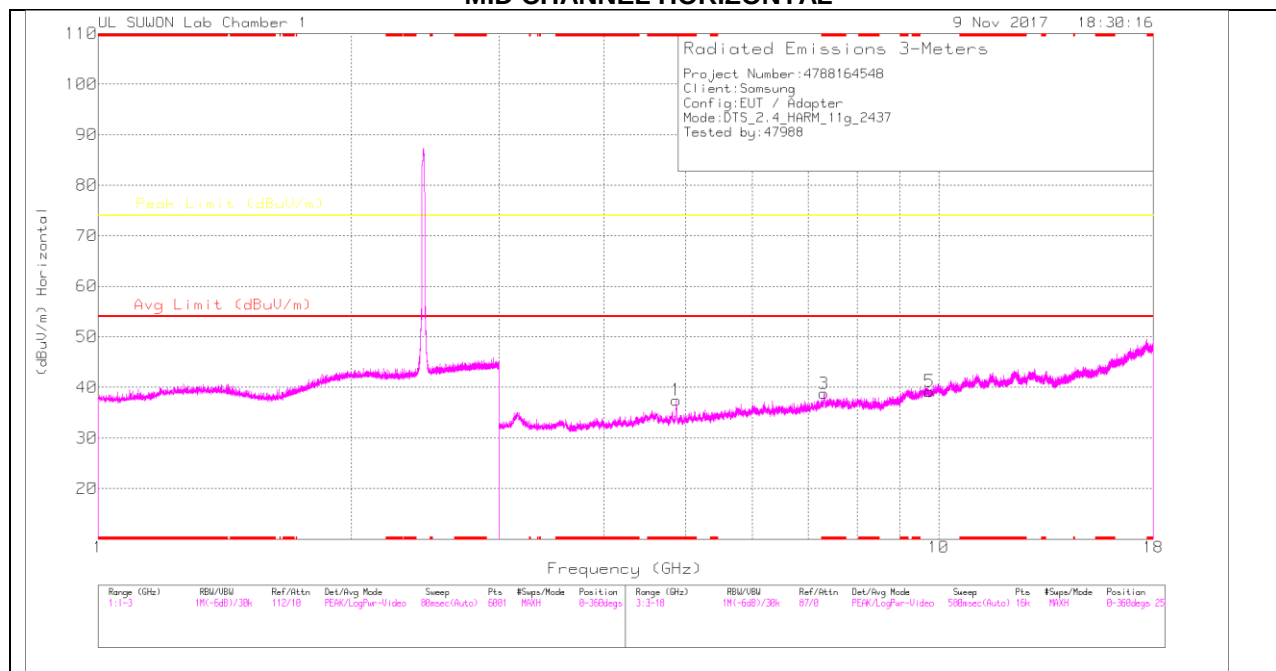

MID CHANNEL VERTICAL

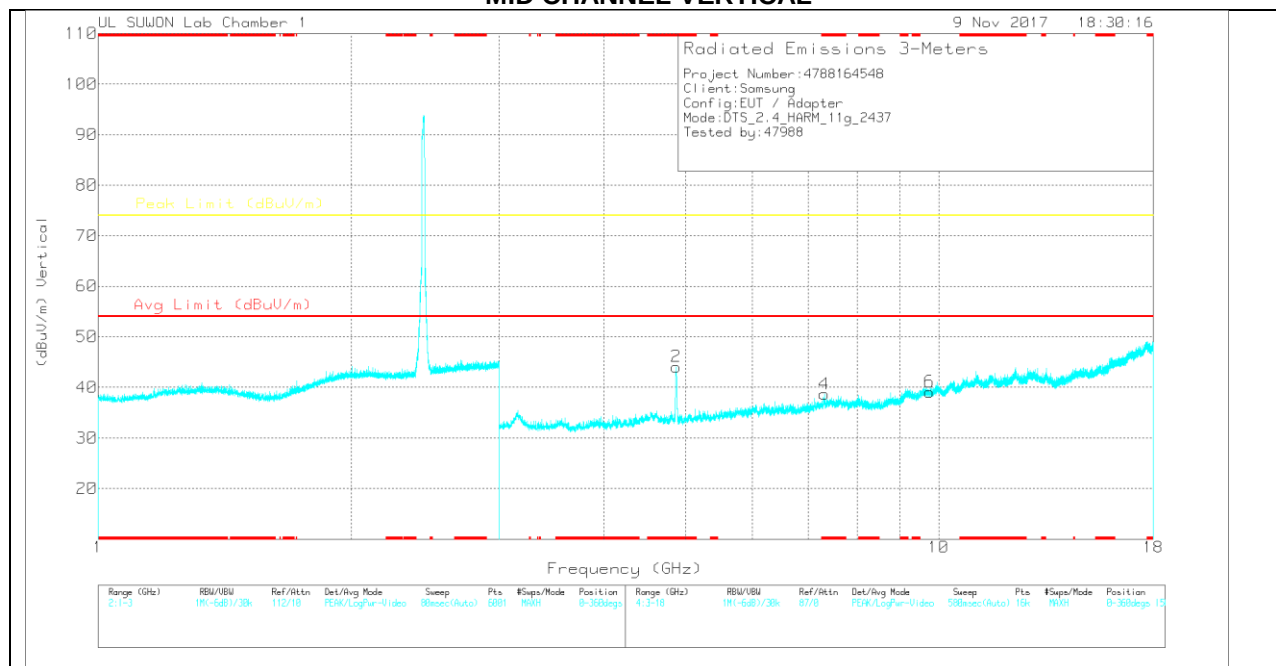

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_001687_17	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.876	35.38	PK	33.8	-31.7	0	37.48	-	-	74	-36.52	0-360	150	H
3	* 7.308	30.57	PK	35.9	-27.7	0	38.77	-	-	74	-35.23	0-360	150	H
5	9.748	26.5	PK	36.9	-24.2	0	39.2	-	-	74	-34.8	0-360	250	H
2	* 4.873	41.99	PK	33.8	-31.7	0	44.09	-	-	74	-29.91	0-360	150	V
4	* 7.31	30.37	PK	35.9	-27.6	0	38.67	-	-	74	-35.33	0-360	150	V
6	9.751	26.4	PK	36.9	-24.2	0	39.1	-	-	74	-34.9	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.873	45.32	PK2	33.8	-31.7	0	47.42	-	-	74	-26.58	248	147	H
* 4.875	32.66	MAv1	33.8	-31.7	.3	35.06	54	-18.94	-	-	248	147	H
* 4.873	53.14	PK2	33.8	-31.7	0	55.24	-	-	74	-18.76	182	207	V
* 4.874	41.57	MAv1	33.8	-31.7	.3	43.97	54	-10.03	-	-	182	207	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL HORIZONTAL

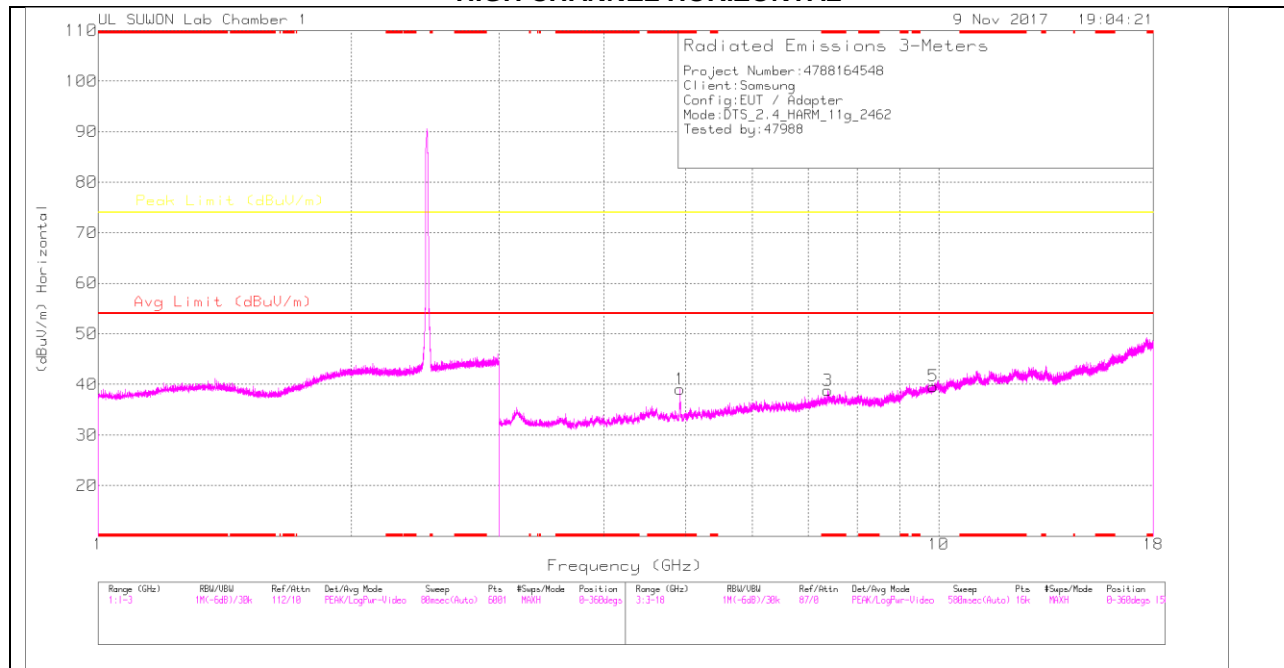

HIGH CHANNEL VERTICAL

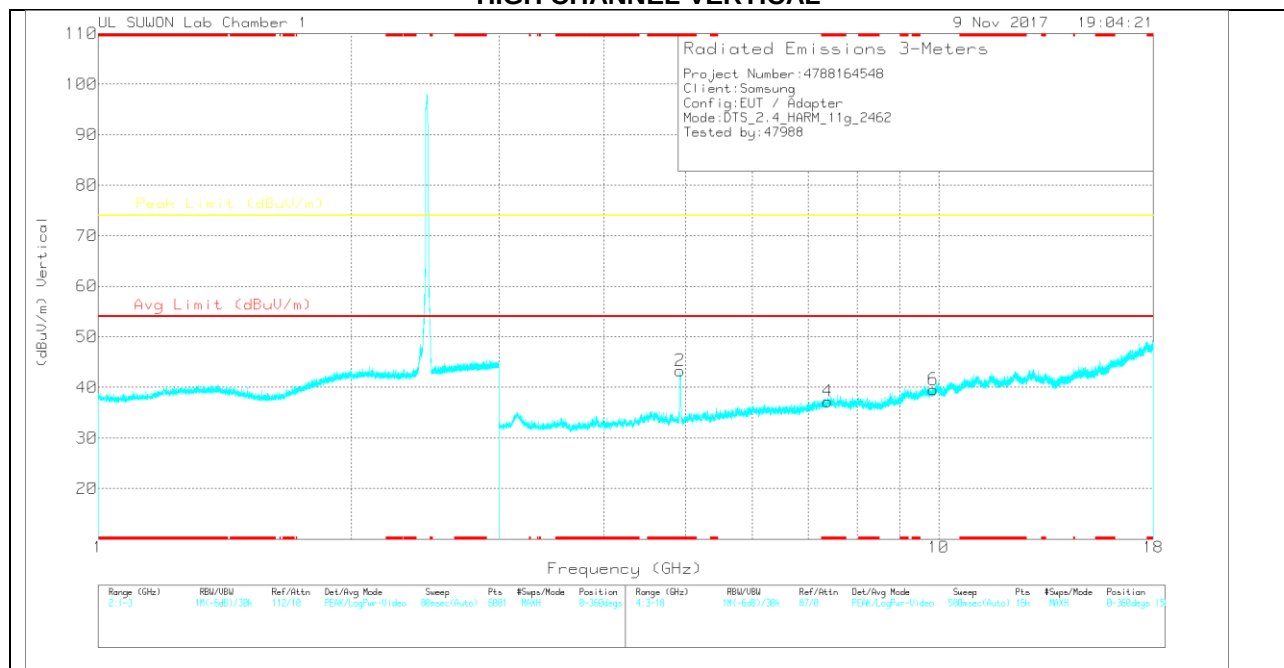

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_001687_17	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.923	37.06	PK	33.8	-31.8	0	39.06	-	-	74	-34.94	0-360	150	H
3	* 7.383	30.07	PK	35.9	-27.2	0	38.77	-	-	74	-35.23	0-360	150	H
5	9.853	26.01	PK	37	-23.4	0	39.61	-	-	74	-34.39	0-360	150	H
2	* 4.922	41.31	PK	33.8	-31.8	0	43.31	-	-	74	-30.69	0-360	250	V
4	* 7.382	28.64	PK	35.9	-27.3	0	37.24	-	-	74	-36.76	0-360	250	V
6	9.848	25.98	PK	37	-23.4	0	39.58	-	-	74	-34.42	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.927	46.15	PK2	33.8	-31.8	0	48.15	-	-	74	-25.85	94	151	H
* 4.926	33.82	MAv1	33.8	-31.8	.3	36.12	54	-17.88	-	-	94	151	H
* 4.923	52.17	PK2	33.8	-31.8	0	54.17	-	-	74	-19.83	186	189	V
* 4.926	38.79	MAv1	33.8	-31.8	.3	41.09	54	-12.91	-	-	186	189	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

12 CHANNEL HORIZONTAL

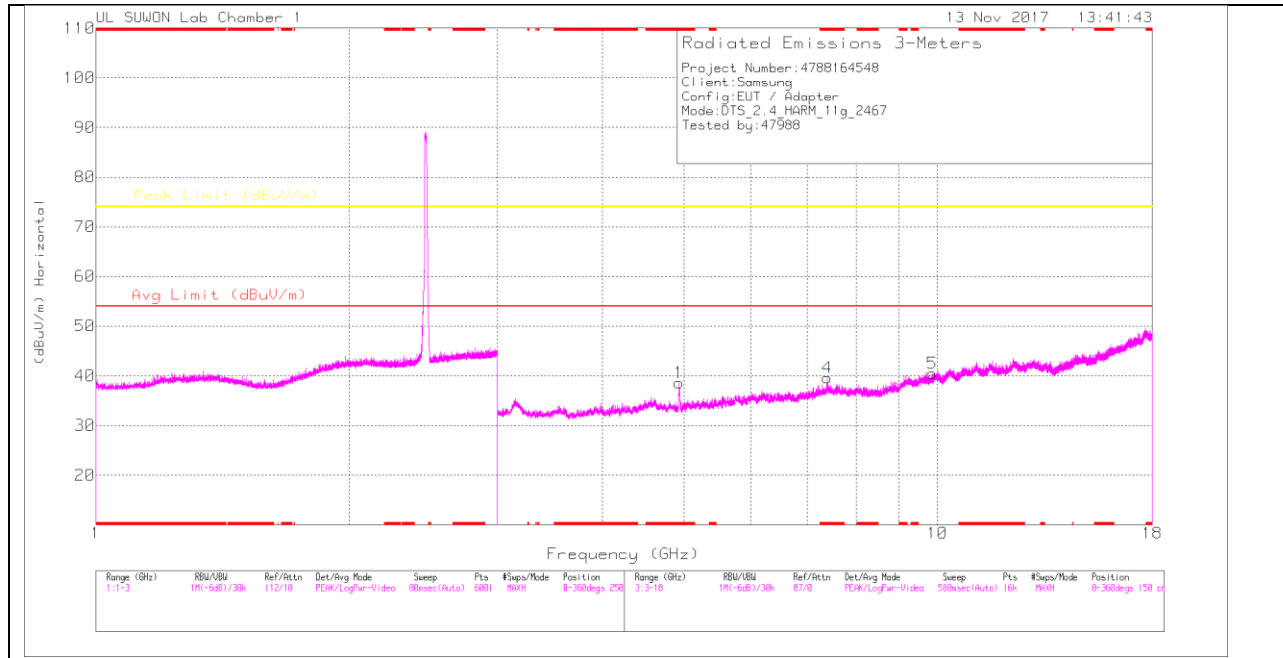

12 CHANNEL VERTICAL

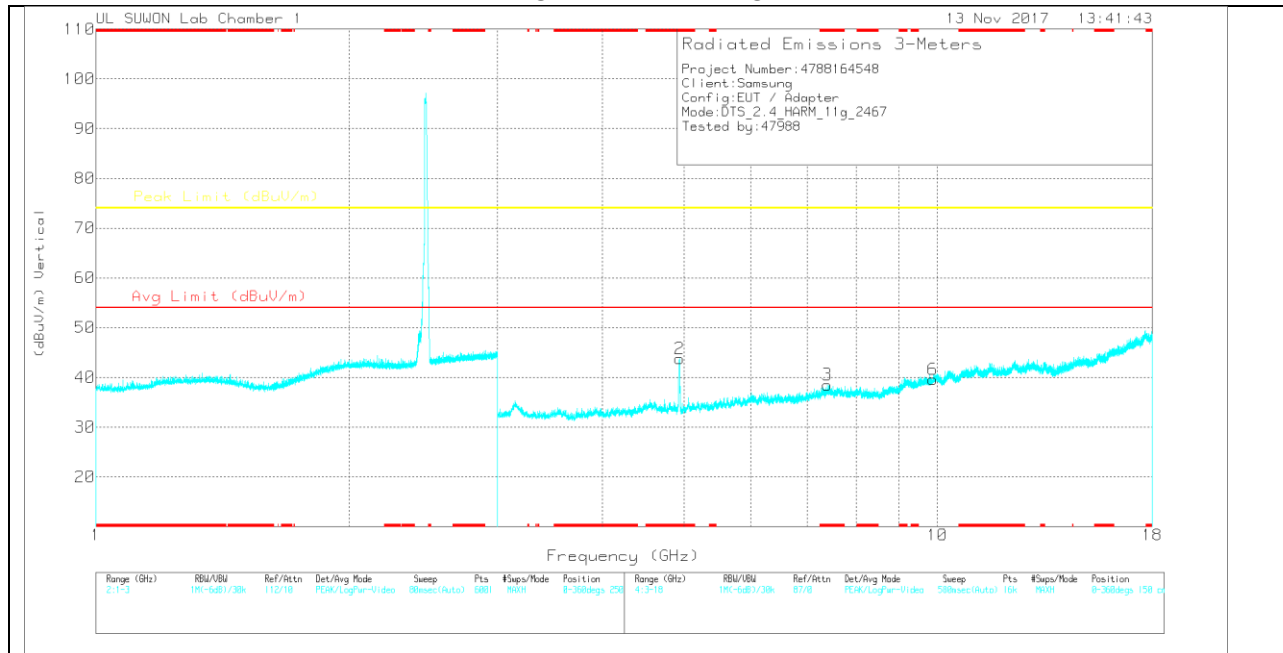

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

12 CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_001687_17	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.931	36.63	PK	33.8	-31.8	0	38.63	-	-	74	-35.37	0-360	150	H
4	* 7.398	30.79	PK	35.9	-27.1	0	39.59	-	-	74	-34.41	0-360	150	H
5	9.865	26.66	PK	37	-23.2	0	40.46	-	-	74	-33.54	0-360	150	H
2	* 4.935	41.73	PK	33.8	-31.8	0	43.73	-	-	74	-30.27	0-360	250	V
3	* 7.395	29.73	PK	35.9	-27.1	0	38.53	-	-	74	-35.47	0-360	150	V
6	9.869	25.66	PK	37	-23.1	0	39.56	-	-	74	-34.44	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.936	46.11	PK2	33.8	-31.8	0	48.11	-	-	74	-25.89	92	341	H
* 4.935	33.75	MAv1	33.8	-31.8	.3	36.05	54	-17.95	-	-	92	341	H
* 4.934	51.86	PK2	33.8	-31.8	0	53.86	-	-	74	-20.14	196	168	V
* 4.935	39.32	MAv1	33.8	-31.8	.3	41.62	54	-12.38	-	-	196	168	V
* 7.4	39.17	PK2	35.9	-27.1	0	47.97	-	-	74	-26.03	208	188	V
* 7.4	26.43	MAv1	35.9	-27.1	.3	35.53	54	-18.47	-	-	208	188	V
* 7.404	40.39	PK2	35.9	-27.1	0	49.19	-	-	74	-24.81	180	215	H
* 7.401	27.93	MAv1	35.9	-27.1	.3	37.03	54	-16.97	-	-	180	215	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak


MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS 2TX CDD

LOW CHANNEL HORIZONTAL

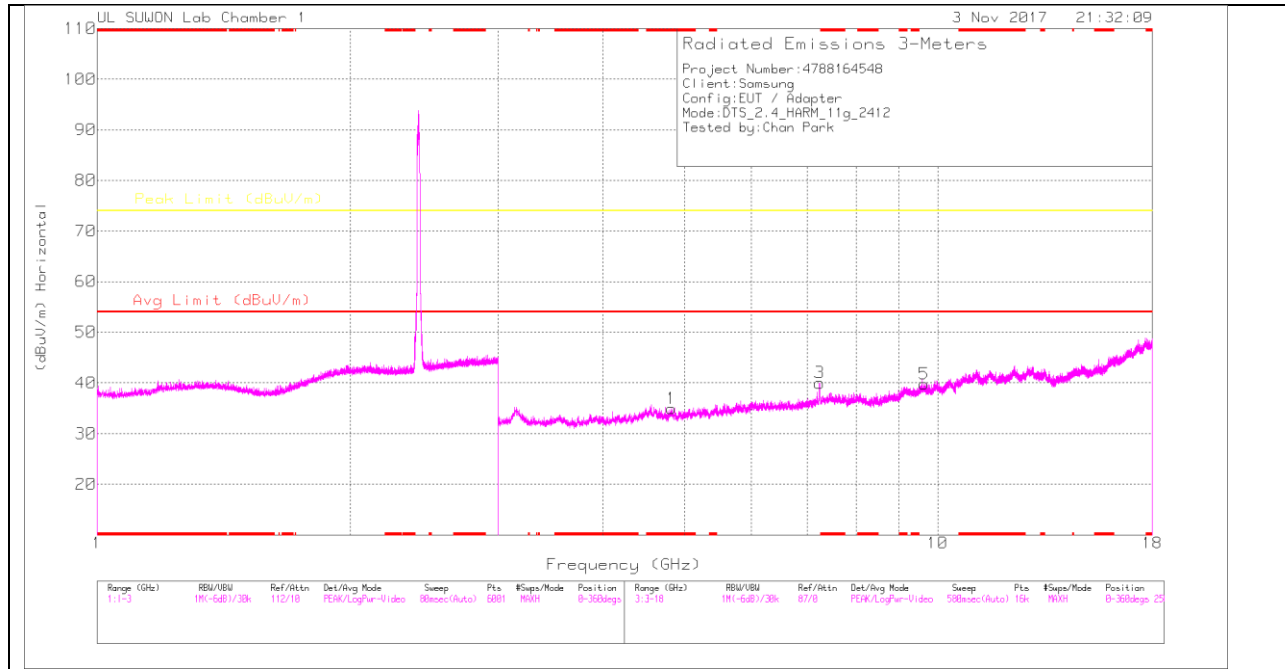

LOW CHANNEL VERTICAL

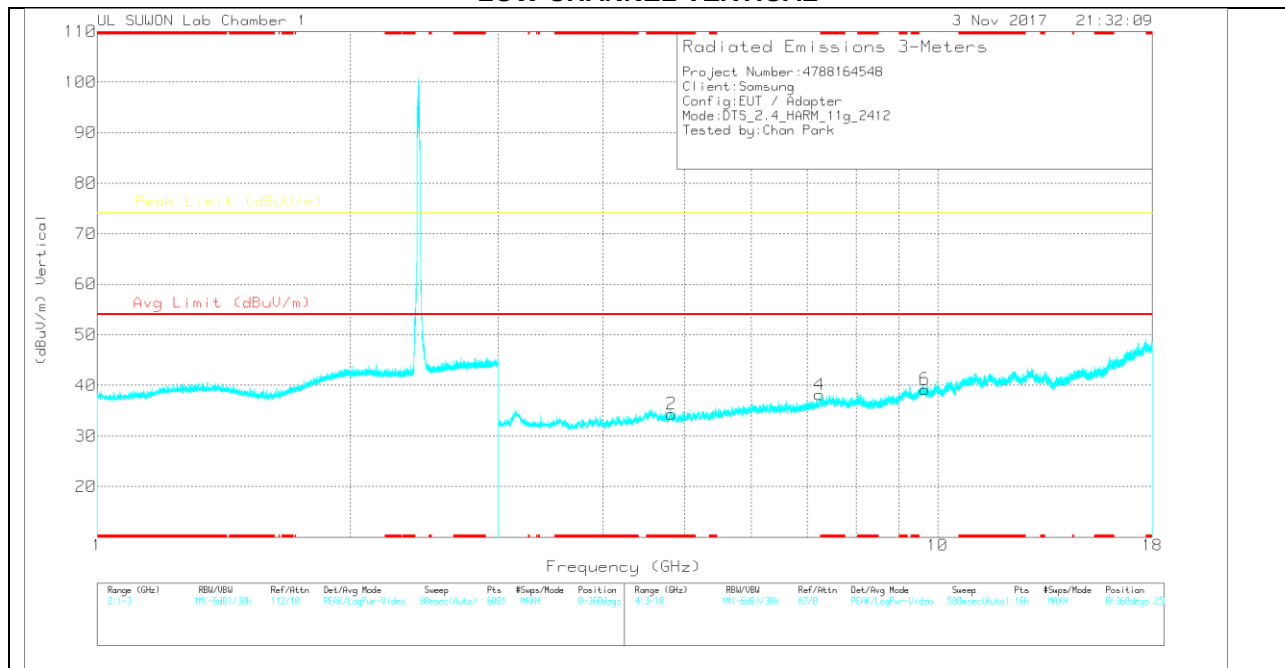

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_001687_17	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.821	32.71	PK	33.8	-31.6	0	34.91	-	-	74	-39.09	0-360	150	H
3	7.235	32.19	PK	35.9	-28.1	0	39.99	-	-	74	-34.01	0-360	250	H
5	9.639	26.6	PK	36.8	-23.6	0	39.8	-	-	74	-34.2	0-360	150	H
2	* 4.821	32.14	PK	33.8	-31.6	0	34.34	-	-	74	-39.66	0-360	150	V
4	7.235	30.39	PK	35.9	-28.1	0	38.19	-	-	74	-35.81	0-360	250	V
6	9.651	26.12	PK	36.8	-23.7	0	39.22	-	-	74	-34.78	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
7.239	42.46	PK2	35.9	-28	0	50.36	-	-	74	-23.64	147	132	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

Note: Frequency range 7239MHz is non-restricted band so only peak measurement was performed .

MID CHANNEL HORIZONTAL

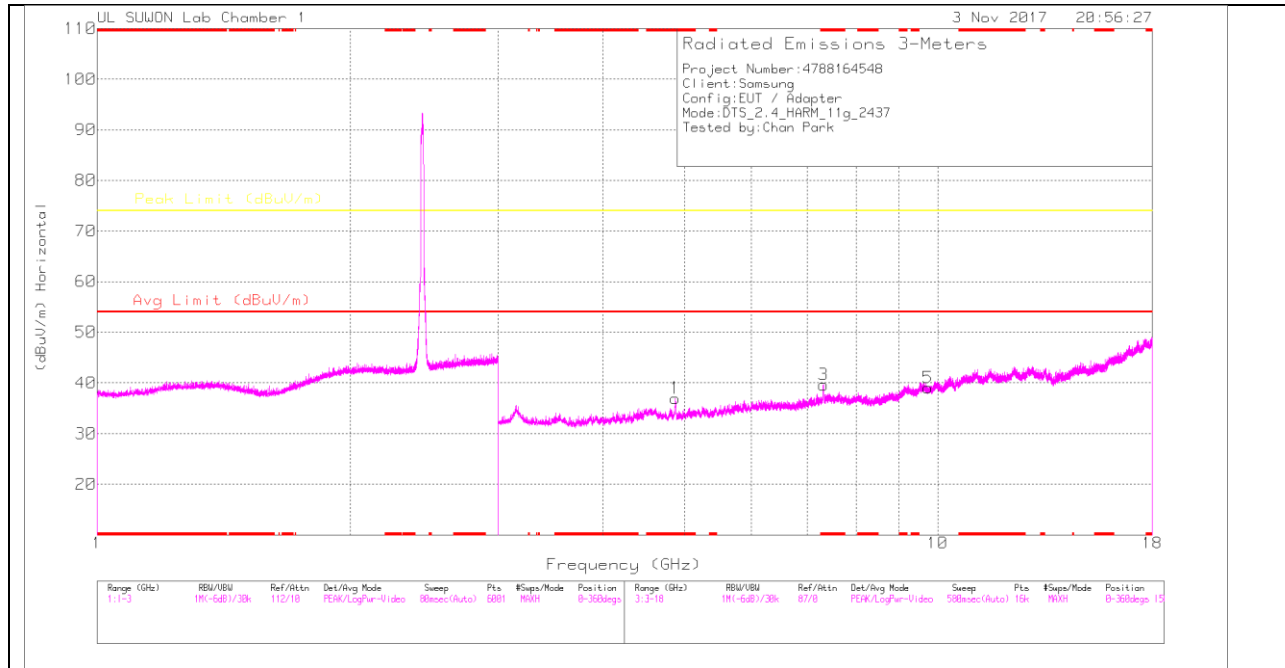

MID CHANNEL VERTICAL

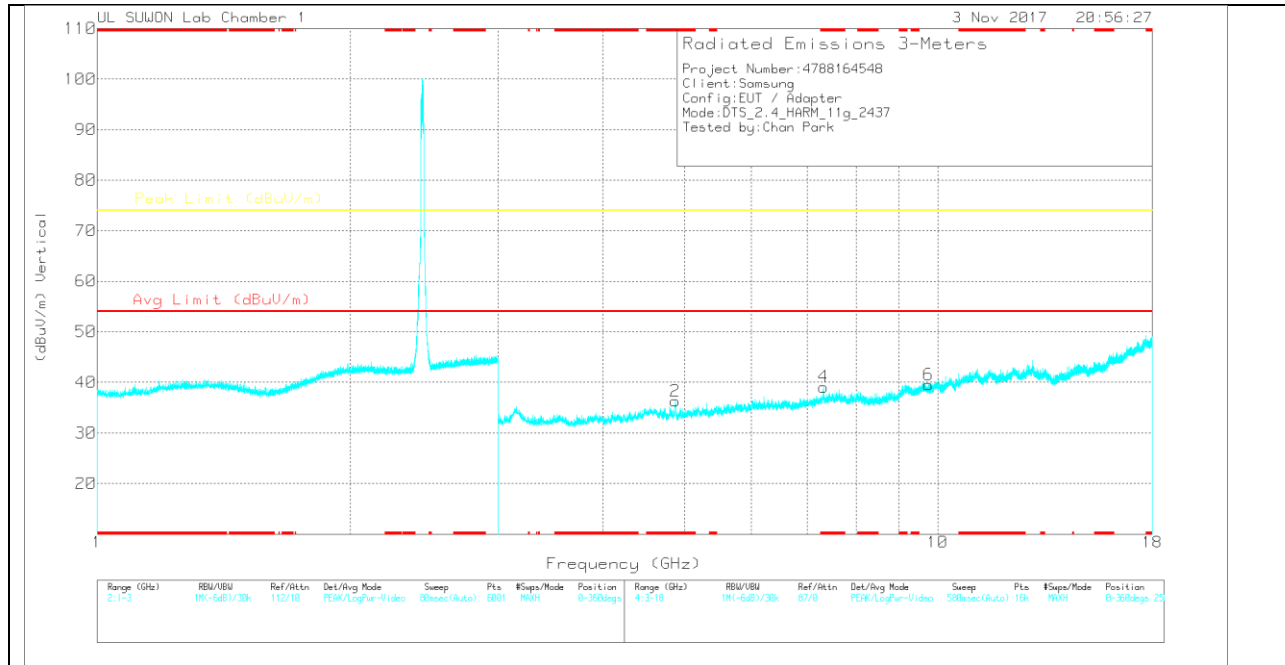

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_001687_17	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.875	34.86	PK	33.8	-31.7	0	36.96	-	-	74	-37.04	0-360	250	H
3	* 7.316	31.33	PK	35.9	-27.6	0	39.63	-	-	74	-34.37	0-360	150	H
5	9.74	26.34	PK	36.9	-24.2	0	39.04	-	-	74	-34.96	0-360	250	H
2	* 4.875	34.18	PK	33.8	-31.7	0	36.28	-	-	74	-37.72	0-360	150	V
4	* 7.312	30.8	PK	35.9	-27.6	0	39.1	-	-	74	-34.9	0-360	150	V
6	9.753	26.84	PK	36.9	-24.2	0	39.54	-	-	74	-34.46	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.876	45.21	PK2	33.8	-31.7	0	47.31	-	-	74	-26.69	183	173	H
* 4.875	32.51	MAv1	33.8	-31.7	.3	34.91	54	-19.09	-	-	183	173	H
* 7.311	43.3	PK2	35.9	-27.6	0	51.6	-	-	74	-22.4	182	135	H
* 7.311	30.81	MAv1	35.9	-27.6	.3	39.41	54	-14.59	-	-	182	135	H
* 4.87	44.89	PK2	33.8	-31.7	0	46.99	-	-	74	-27.01	138	237	V
* 4.875	32.79	MAv1	33.8	-31.7	.3	35.19	54	-18.81	-	-	138	237	V
* 7.309	40.9	PK2	35.9	-27.7	0	49.1	-	-	74	-24.9	206	347	V
* 7.31	28.5	MAv1	35.9	-27.7	.3	37	54	-17	-	-	206	347	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL HORIZONTAL

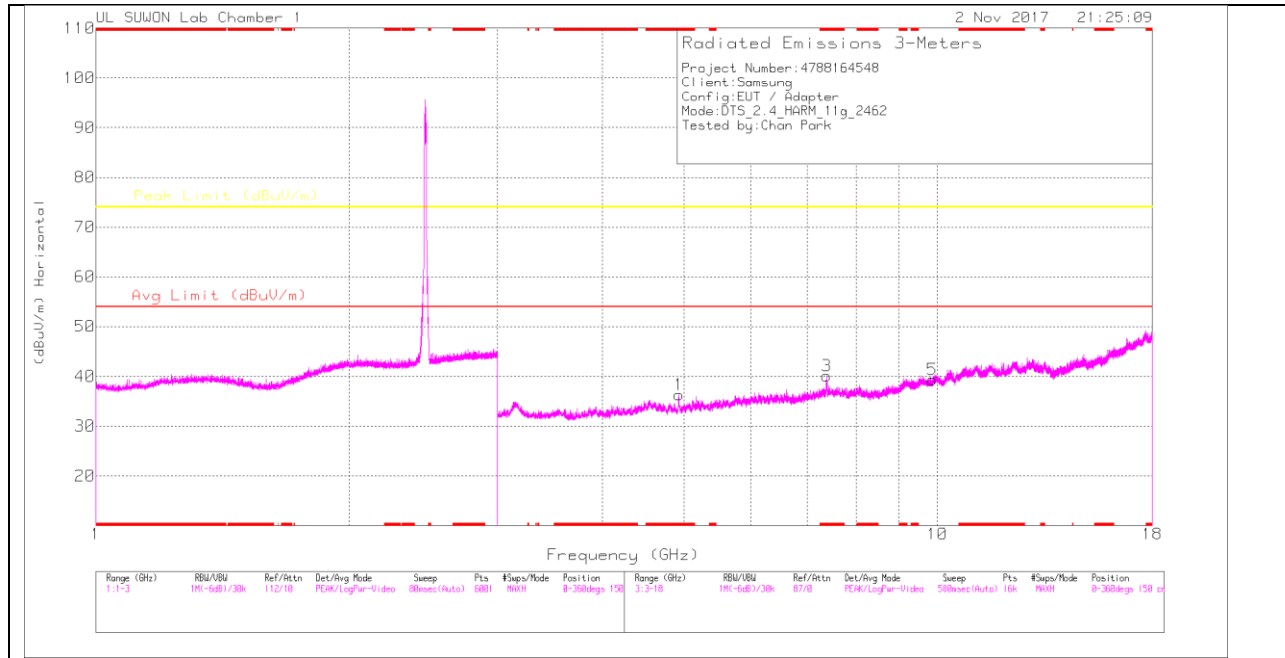

HIGH CHANNEL VERTICAL

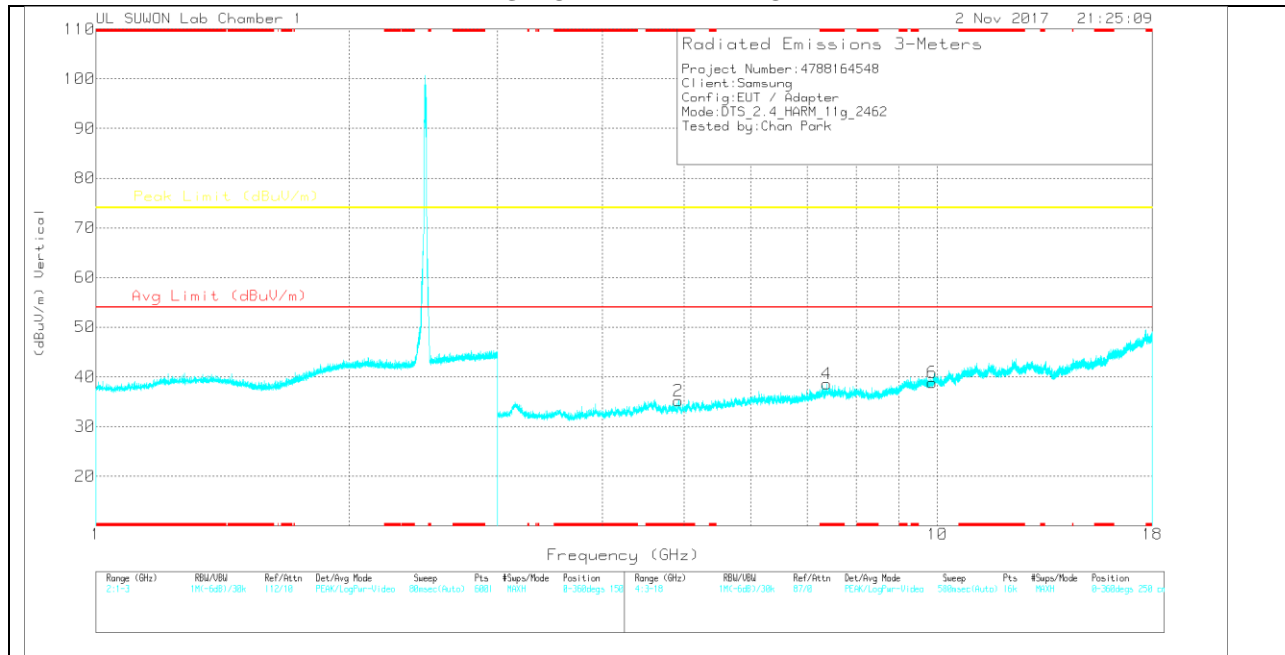

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_001687_17	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.928	34.34	PK	33.8	-31.8	0	36.34	-	-	74	-37.66	0-360	250	H
3	* 7.383	31.45	PK	35.9	-27.2	0	40.15	-	-	74	-33.85	0-360	150	H
5	9.855	25.64	PK	37	-23.3	0	39.34	-	-	74	-34.66	0-360	250	H
2	* 4.924	33.22	PK	33.8	-31.8	0	35.22	-	-	74	-38.78	0-360	150	V
4	* 7.387	29.88	PK	35.9	-27.2	0	38.58	-	-	74	-35.42	0-360	250	V
6	9.852	25.26	PK	37	-23.4	0	38.86	-	-	74	-35.14	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.923	44.05	PK2	33.8	-31.8	0	46.05	-	-	74	-27.95	248	182	H
* 4.928	31.93	MAv1	33.8	-31.8	.3	34.23	54	-19.77	-	-	248	182	H
* 7.383	42	PK2	35.9	-27.2	0	50.7	-	-	74	-23.3	180	180	H
* 7.384	29.17	MAv1	35.9	-27.2	.3	38.17	54	-15.83	-	-	180	180	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

12 CHANNEL HORIZONTAL

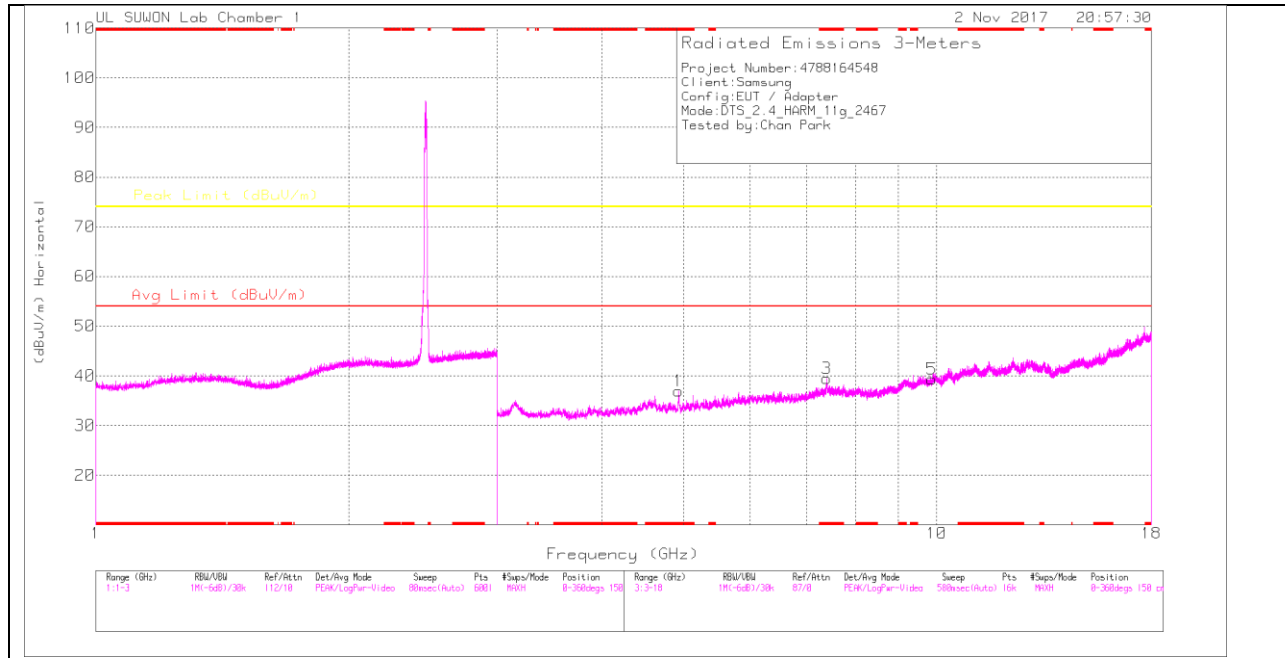

12 CHANNEL VERTICAL

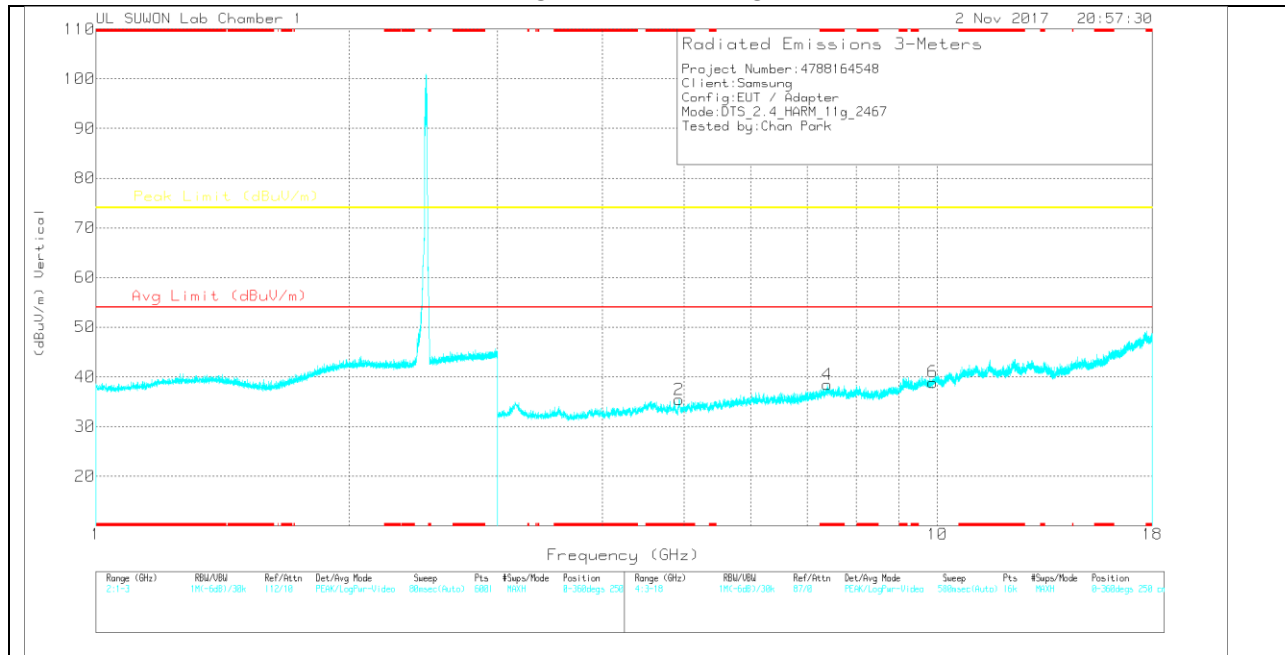

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

12 CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_001687_17	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.933	34.95	PK	33.8	-31.8	0	36.95	-	-	74	-37.05	0-360	150	H
3	* 7.399	30.7	PK	35.9	-27.1	0	39.5	-	-	74	-34.5	0-360	250	H
5	9.867	25.4	PK	37	-23.1	0	39.3	-	-	74	-34.7	0-360	250	H
2	* 4.934	33.38	PK	33.8	-31.8	0	35.38	-	-	74	-38.62	0-360	150	V
4	* 7.394	29.68	PK	35.9	-27.1	0	38.48	-	-	74	-35.52	0-360	150	V
6	9.869	25.01	PK	37	-23.1	0	38.91	-	-	74	-35.09	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.933	45.13	PK2	33.8	-31.8	0	47.13	-	-	74	-26.87	246	182	H
* 4.933	32.5	MAv1	33.8	-31.8	.3	34.8	54	-19.2	-	-	246	182	H
* 7.402	38.62	PK2	35.9	-27.1	0	47.42	-	-	74	-26.58	248	158	H
* 7.401	26.81	MAv1	35.9	-27.1	.3	35.91	54	-18.09	-	-	248	158	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

10.2.4. TX ABOVE 1 GHz 802.11n HT20 2TX CDD MODE IN THE 2.4 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

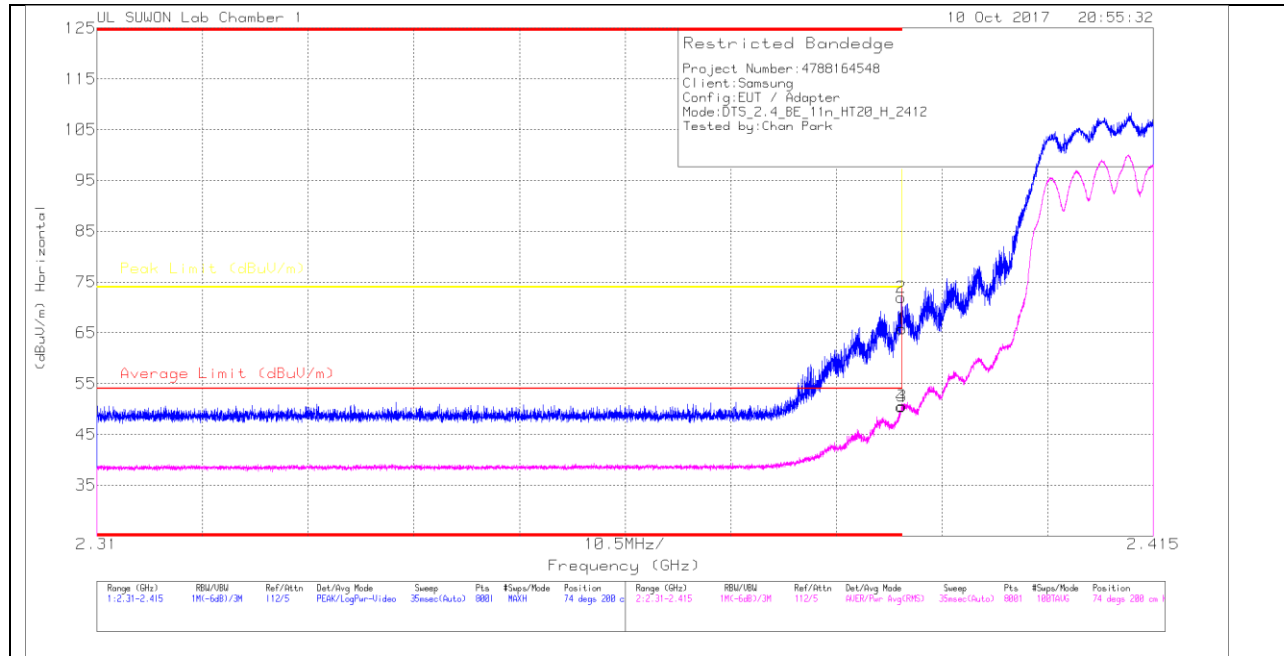

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168 717	10dB_ATT(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Pk Margin (dB)	Asimuth (Degs)	Height (cm)	Polarity
1	* 2.39	60.22	Pk	31.3	-25.7	0	65.82	-	-	74	-8.18	74	200	H
2	* 2.39	66.39	Pk	31.3	-25.7	0	71.99	-	-	74	-2.01	74	200	H
3	* 2.39	44.6	RMS	31.3	-25.7	.32	50.52	54	-3.48	-	-	74	200	H
4	* 2.39	44.5	RMS	31.3	-25.7	.32	50.42	54	-3.58	-	-	74	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

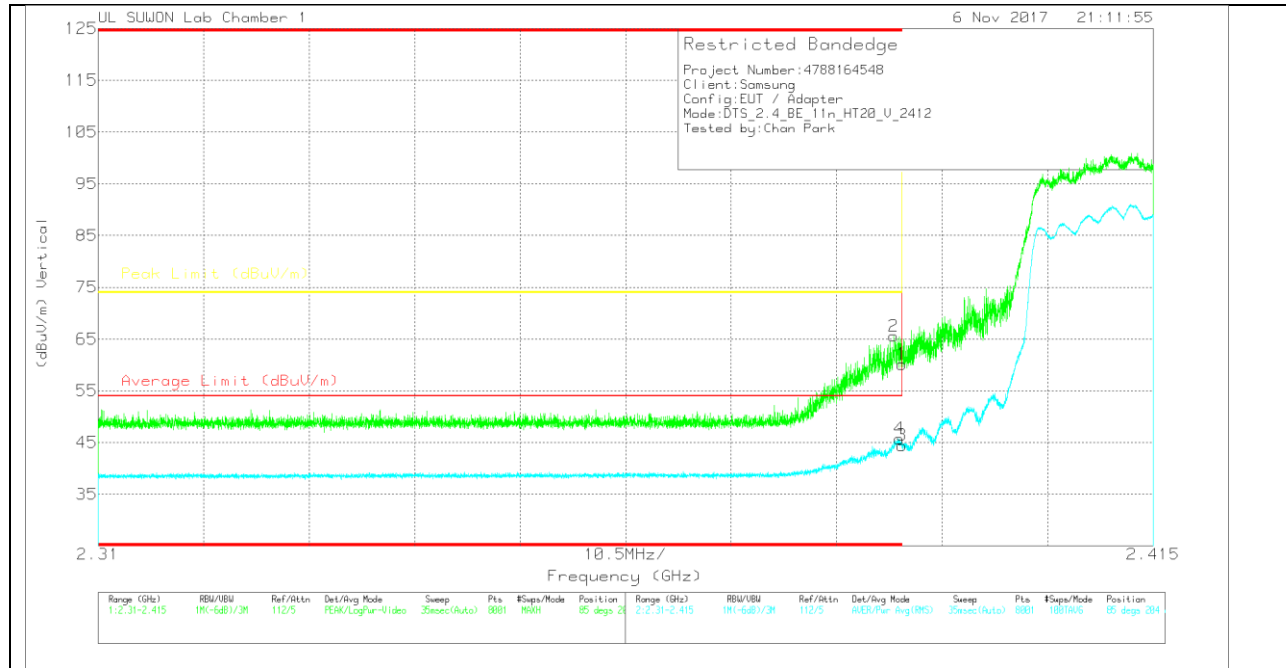

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168 717	10dB_ATT(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.39	54.54	Pk	31.3	-25.7	0	60.14	-	-	74	-13.86	85	204	V
2	* 2.389	59.97	Pk	31.3	-25.7	0	65.57	-	-	74	-8.43	85	204	V
3	* 2.39	38.54	RMS	31.3	-25.7	-32	44.46	54	-9.54	-	-	85	204	V
4	* 2.39	39.83	RMS	31.3	-25.7	-32	45.75	54	-8.25	-	-	85	204	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

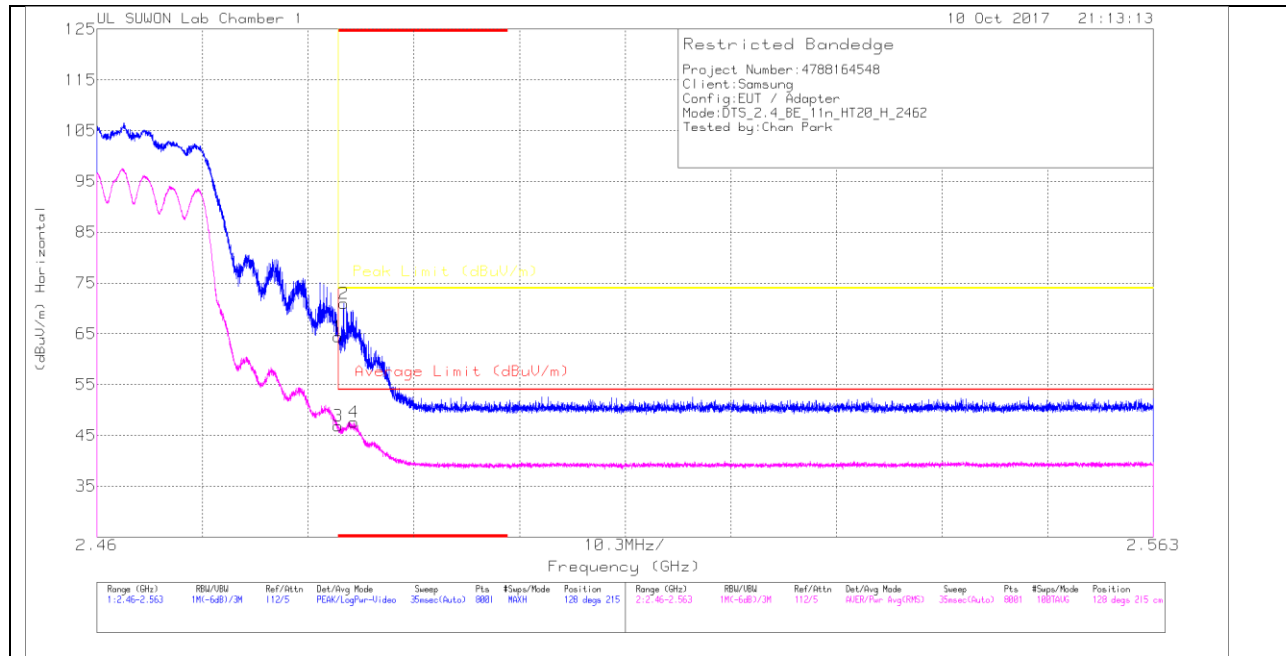

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168 717	10dB_ATT(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.484	58.31	Pk		-25.5	0	64.41	-	-	74	-9.59	128	215	H
2	* 2.484	64.87	Pk		-25.5	0	70.97	-	-	74	-3.03	128	215	H
3	* 2.484	40.58	RMS		-25.5	.32	47.00	54	-7.00	-	-	128	215	H
4	* 2.485	41.27	RMS		-25.5	.32	47.69	54	-6.31	-	-	128	215	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

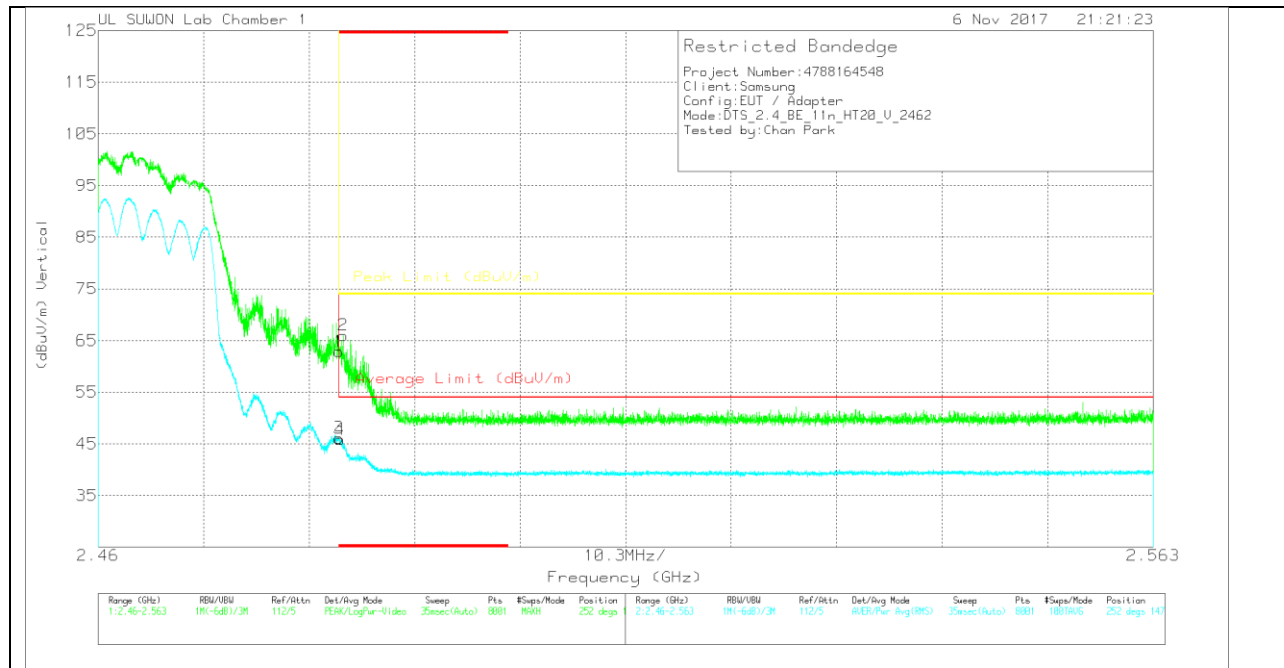

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168 717	10dB_ATT(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	56.81	Pk		-25.5	0	62.91	-	-	74	-11.09	252	147	V
2	* 2.484	59.9	Pk		-25.5	0	66	-	-	74	-8	252	147	V
3	* 2.484	39.72	RMS		-25.5	.32	46.14	54	-7.86	-	-	252	147	V
4	* 2.484	39.46	RMS		-25.5	.32	45.88	54	-8.12	-	-	252	147	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (12 CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

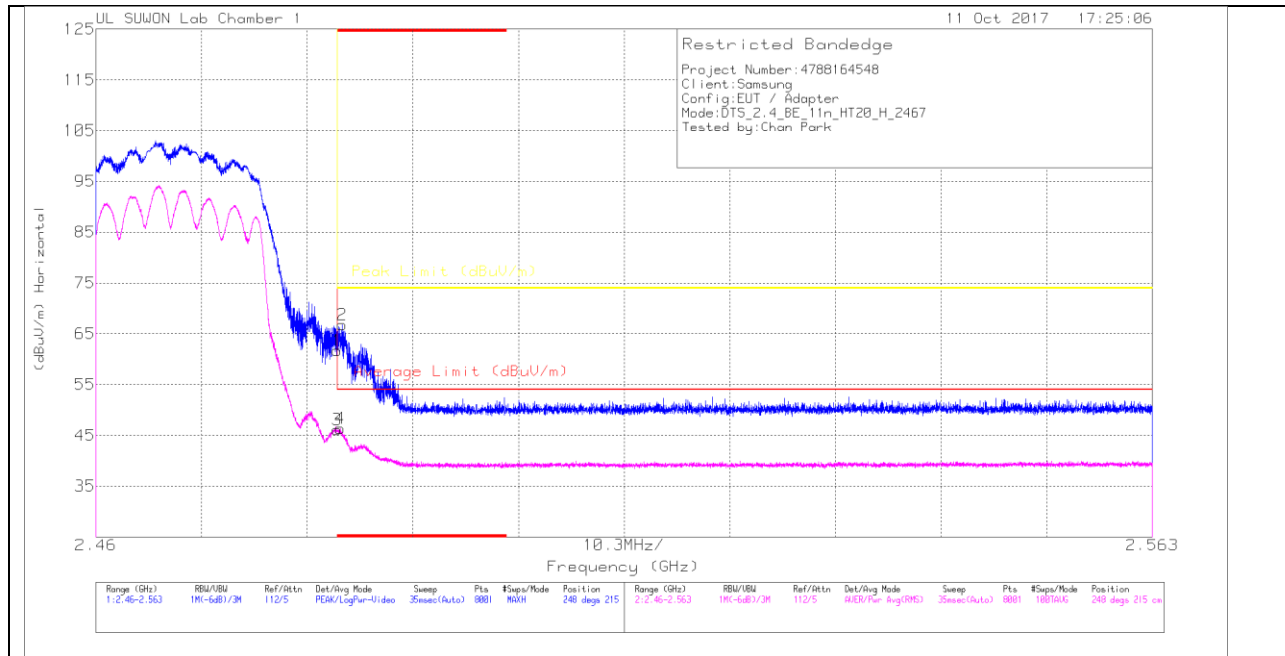

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00108 717	10dB_ATT(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.484	55.63	Pk	31.6	-25.5	0	61.73	-	-	74	-12.27	248	215	H
2	* 2.484	60.72	Pk	31.6	-25.5	0	66.82	-	-	74	-7.18	248	215	H
3	* 2.484	39.79	RMS	31.6	-25.5	.32	46.21	54	-7.79	-	-	248	215	H
4	* 2.484	40.11	RMS	31.6	-25.5	.32	46.53	54	-7.47	-	-	248	215	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

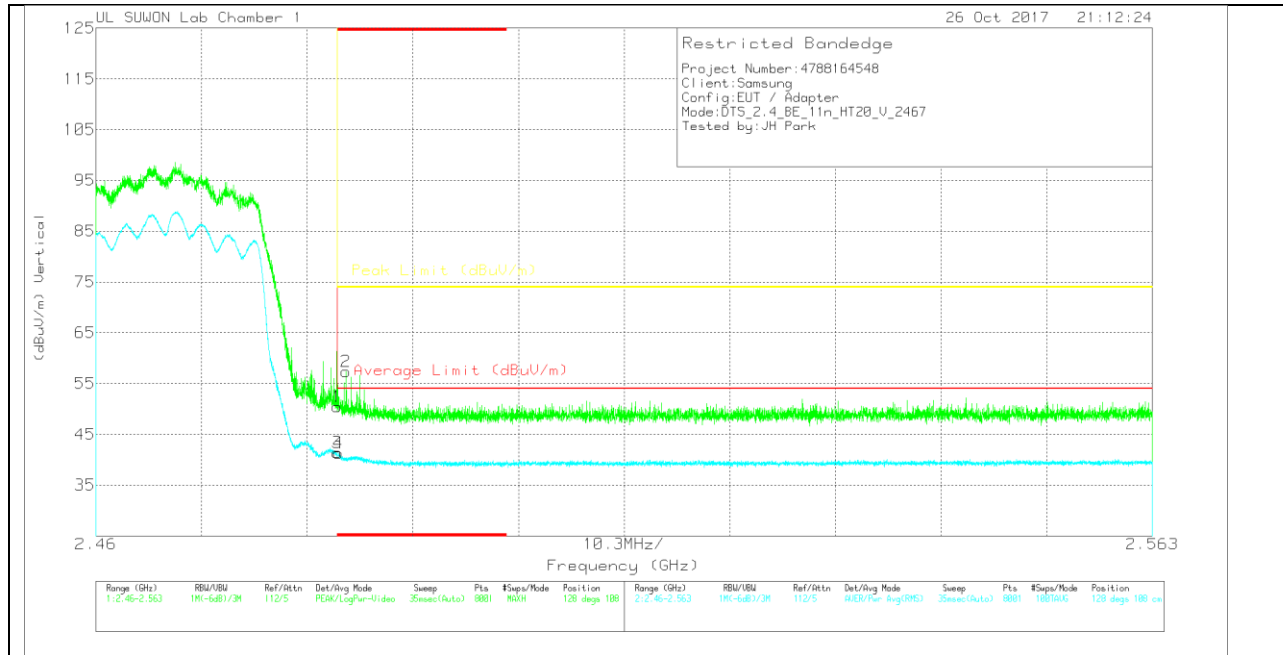

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168 717	10dB_ATT(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Pk Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.484	44.32	Pk	31.6	-25.5	0	50.42	-	-	74	-23.58	128	108	V
2	* 2.484	51.27	Pk	31.6	-25.5	0	57.37	-	-	74	-16.63	128	108	V
3	* 2.484	34.99	RMS	31.6	-25.5	.32	41.41	54	-12.59	-	-	128	108	V
4	* 2.484	34.86	RMS	31.6	-25.5	.32	41.28	54	-12.72	-	-	128	108	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (13 CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

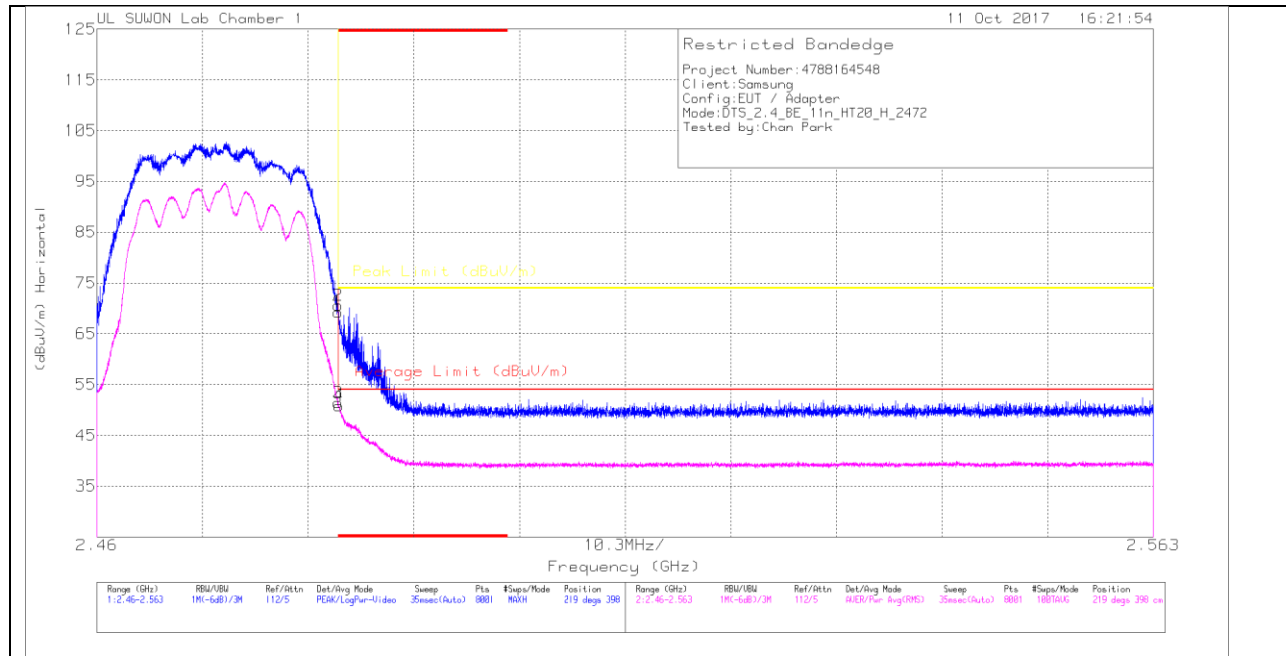

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168 717	10dB_ATT(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.484	63.14	Pk	31.6	-25.5	0	69.24	-	-	74	-4.76	219	398	H
2	* 2.484	64.51	Pk	31.6	-25.5	0	70.61	-	-	74	-3.39	219	398	H
3	* 2.484	45.11	RMS	31.6	-25.5	.32	51.53	54	-2.47	-	-	219	398	H
4	* 2.484	44.57	RMS	31.6	-25.5	.32	50.99	54	-3.01	-	-	219	398	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

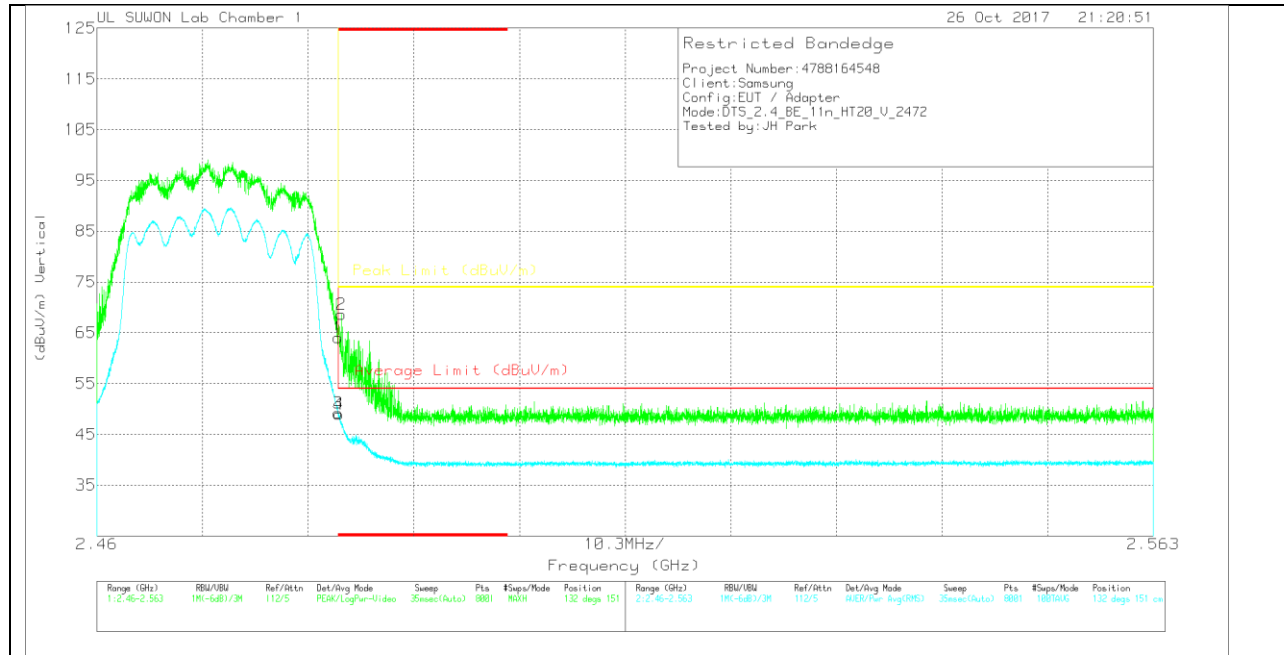

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00108 717	10dB_ATT(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.484	57.93	Pk	31.6	-25.5	0	64.03	-	-	74	-9.97	132	151	V
2	* 2.484	62.55	Pk	31.6	-25.5	0	68.65	-	-	74	-5.35	132	151	V
3	* 2.484	42.84	RMS	31.6	-25.5	.32	49.26	54	-4.74	-	-	132	151	V
4	* 2.484	42.6	RMS	31.6	-25.5	.32	49.02	54	-4.98	-	-	132	151	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS ANTENNA1

LOW CHANNEL HORIZONTAL

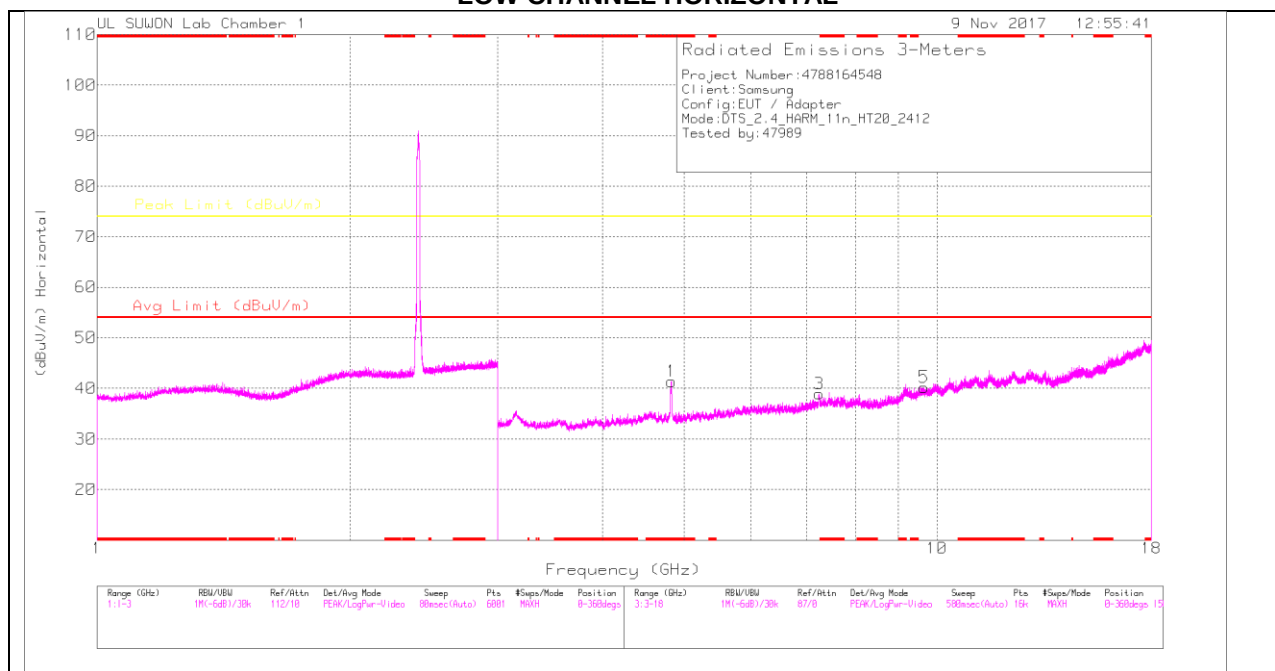

LOW CHANNEL VERTICAL

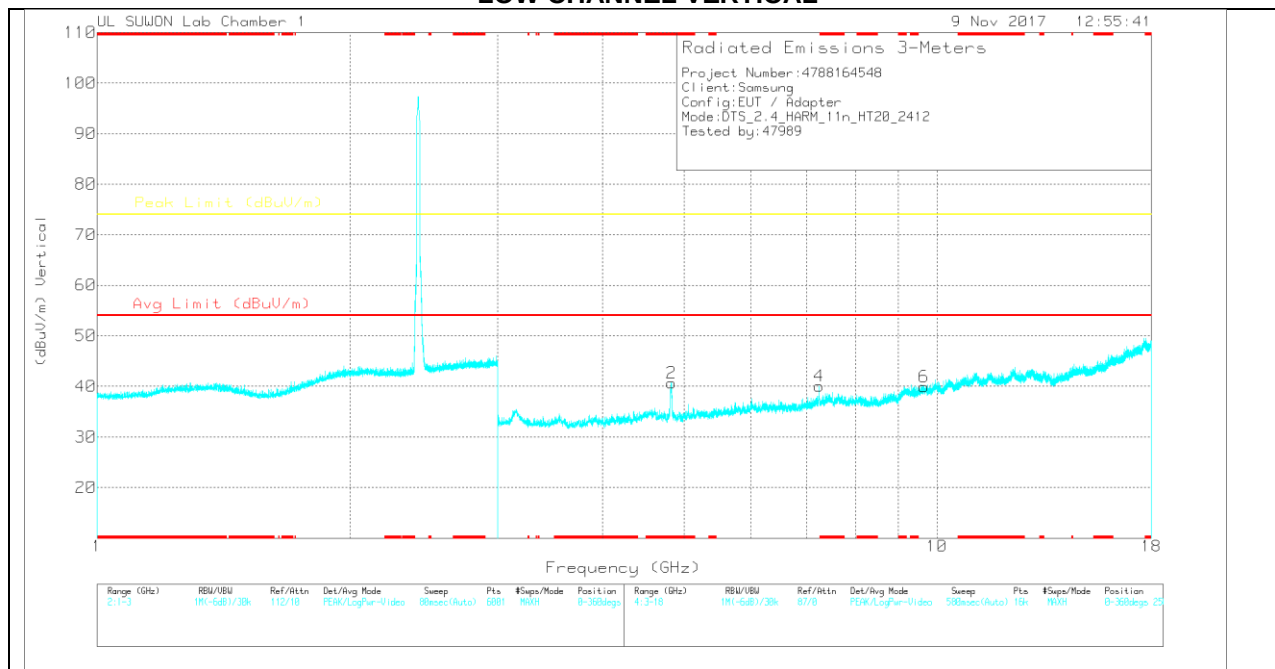

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_001687 17	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.829	39.17	PK	33.8	-31.6	0	41.37	-	-	74	-32.63	0-360	150	H
3	7.243	31.01	PK	35.9	-28	0	38.91	-	-	74	-35.09	0-360	250	H
5	9.652	27.1	PK	36.8	-23.7	0	40.2	-	-	74	-33.8	0-360	150	H
2	* 4.83	38.44	PK	33.8	-31.6	0	40.64	-	-	74	-33.36	0-360	250	V
4	7.238	32.11	PK	35.9	-28	0	40.01	-	-	74	-33.99	0-360	250	V
6	9.649	26.83	PK	36.8	-23.7	0	39.93	-	-	74	-34.07	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK – Peak detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.823	52.08	PK2	33.8	-31.6	0	54.28	-	-	74	-19.72	226	107	H
* 4.826	36.13	MAv1	33.8	-31.6	.32	38.65	54	-15.35	-	-	226	107	H
* 4.827	51.99	PK2	33.8	-31.6	0	54.19	-	-	74	-19.81	160	145	V
* 4.827	36.6	MAv1	33.8	-31.6	.32	39.12	54	-14.88	-	-	160	145	V
7.242	43.27	PK2	35.9	-28	0	51.17	-	-	74	-22.83	201	150	H
7.244	41.17	PK2	35.9	-28	0	49.07	-	-	74	-24.93	171	286	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK2 - KDB558074 Method: Maximum Peak
MAv1 - KDB558074 Option 1 Maximum RMS Average

Note: Frequency range 7242MHz to 7244MHz is non-restricted band so only peak measurement was performed .

MID CHANNEL HORIZONTAL

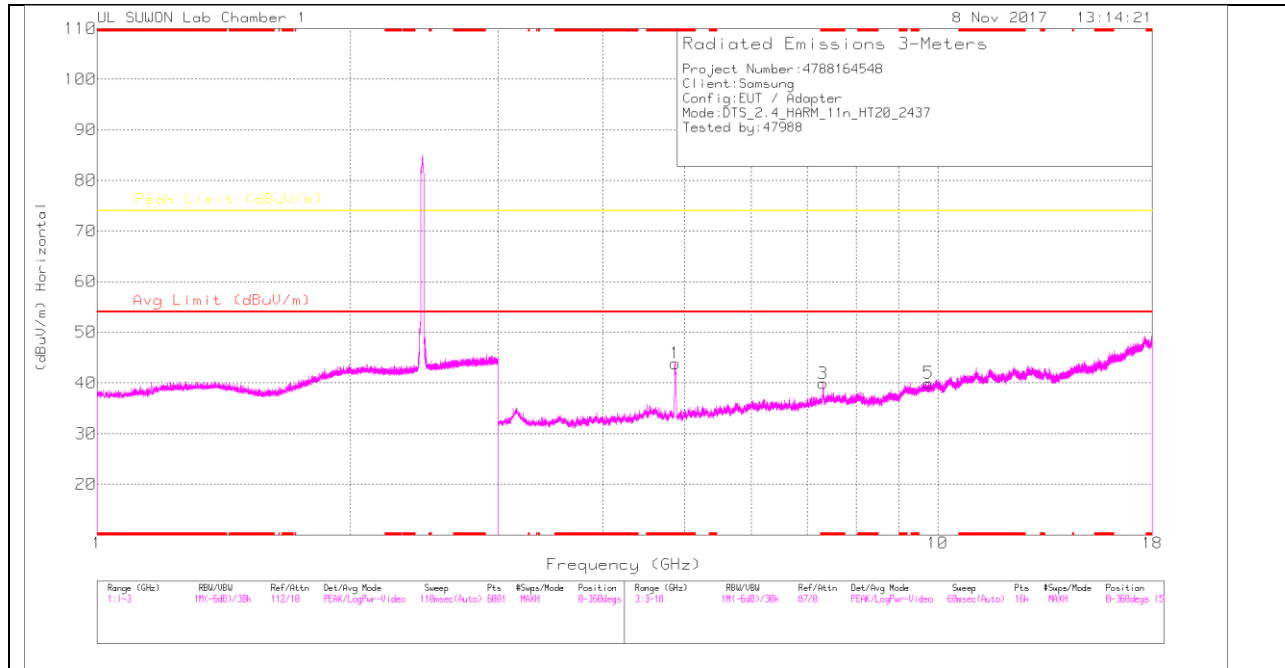

MID CHANNEL VERTICAL

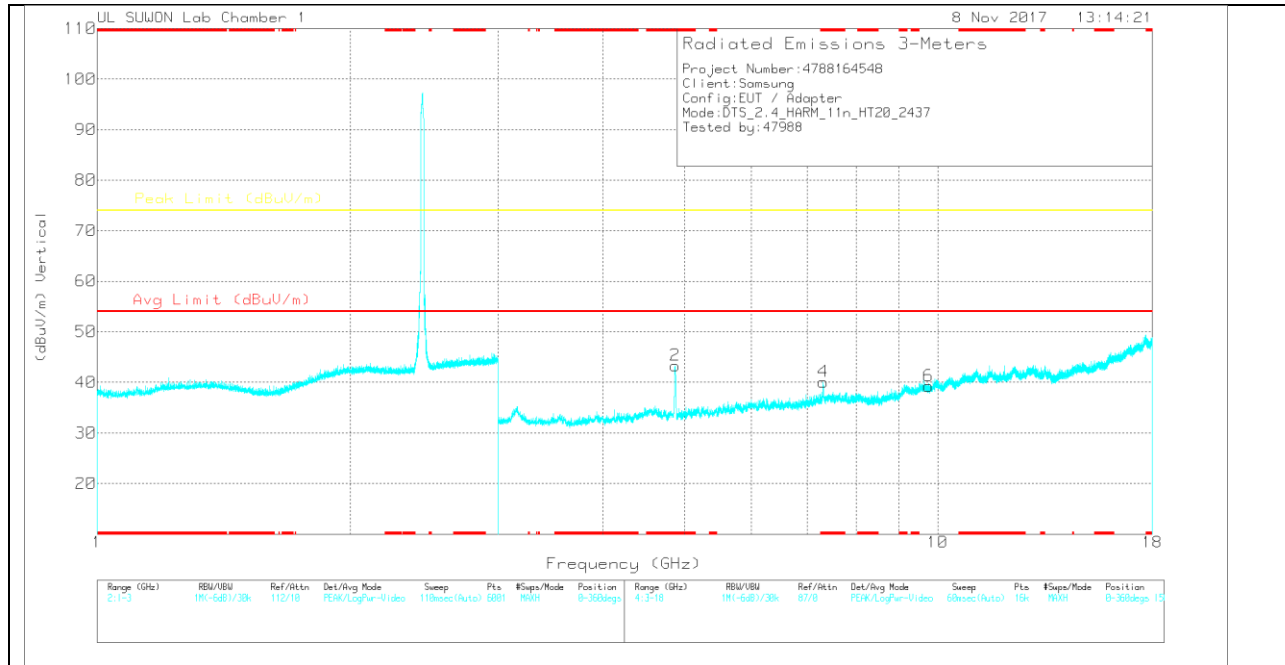

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_001687_17	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.874	41.75	PK	33.8	-31.7	0	43.85	-	-	74	-30.15	0-360	150	H
3	* 7.302	31.71	PK	35.9	-27.7	0	39.91	-	-	74	-34.09	0-360	150	H
5	9.748	27.26	PK	36.9	-24.2	0	39.96	-	-	74	-34.04	0-360	250	H
2	* 4.872	41.24	PK	33.8	-31.7	0	43.34	-	-	74	-30.66	0-360	150	V
4	* 7.308	31.91	PK	35.9	-27.7	0	40.11	-	-	74	-33.89	0-360	250	V
6	9.748	26.55	PK	36.9	-24.2	0	39.25	-	-	74	-34.75	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.873	55.78	PK2	33.8	-31.7	0	57.88	-	-	74	-16.12	245	125	H
* 4.873	39.54	MAv1	33.8	-31.7	.32	41.96	54	-12.04	-	-	245	125	H
* 4.873	55.5	PK2	33.8	-31.7	0	57.6	-	-	74	-16.4	126	150	V
* 4.872	38.62	MAv1	33.8	-31.7	.32	41.04	54	-12.96	-	-	126	150	V
* 7.315	40.86	PK2	35.9	-27.6	0	49.16	-	-	74	-24.84	55	140	H
* 7.313	27.75	MAv1	35.9	-27.6	.32	36.37	54	-17.63	-	-	55	140	H
* 7.308	39.26	PK2	35.9	-27.7	0	47.46	-	-	74	-26.54	147	171	V
* 7.312	27.07	MAv1	35.9	-27.6	.32	35.69	54	-18.31	-	-	147	171	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL HORIZONTAL

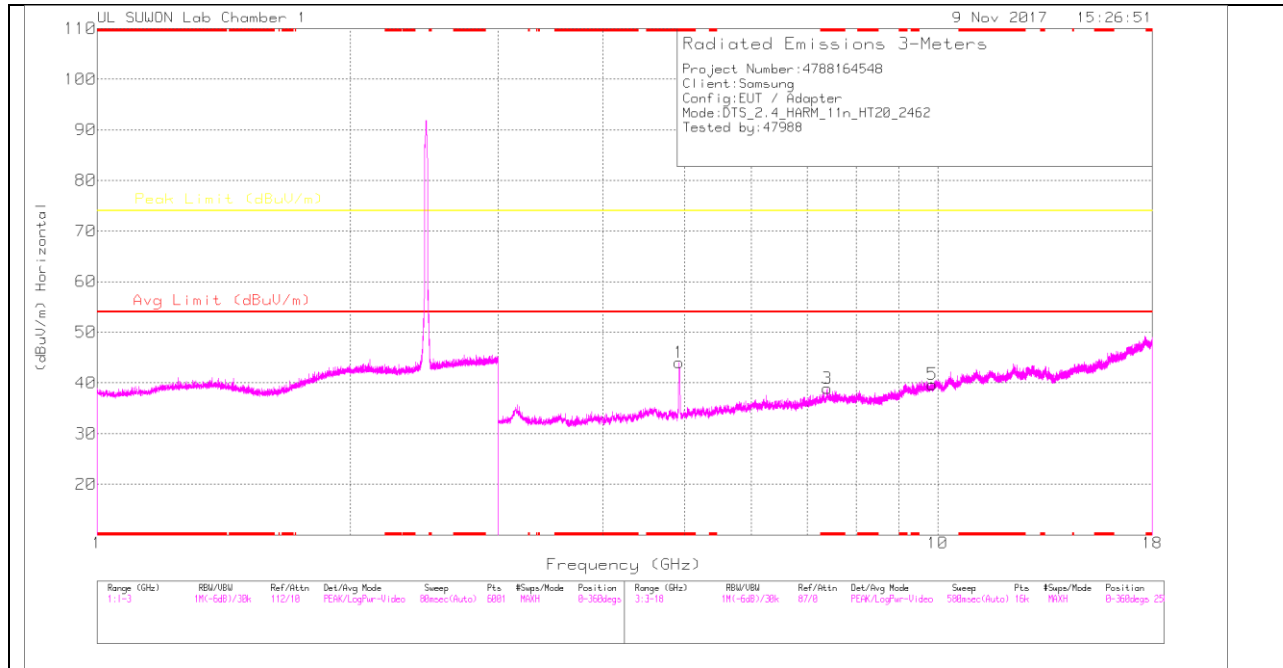

HIGH CHANNEL VERTICAL

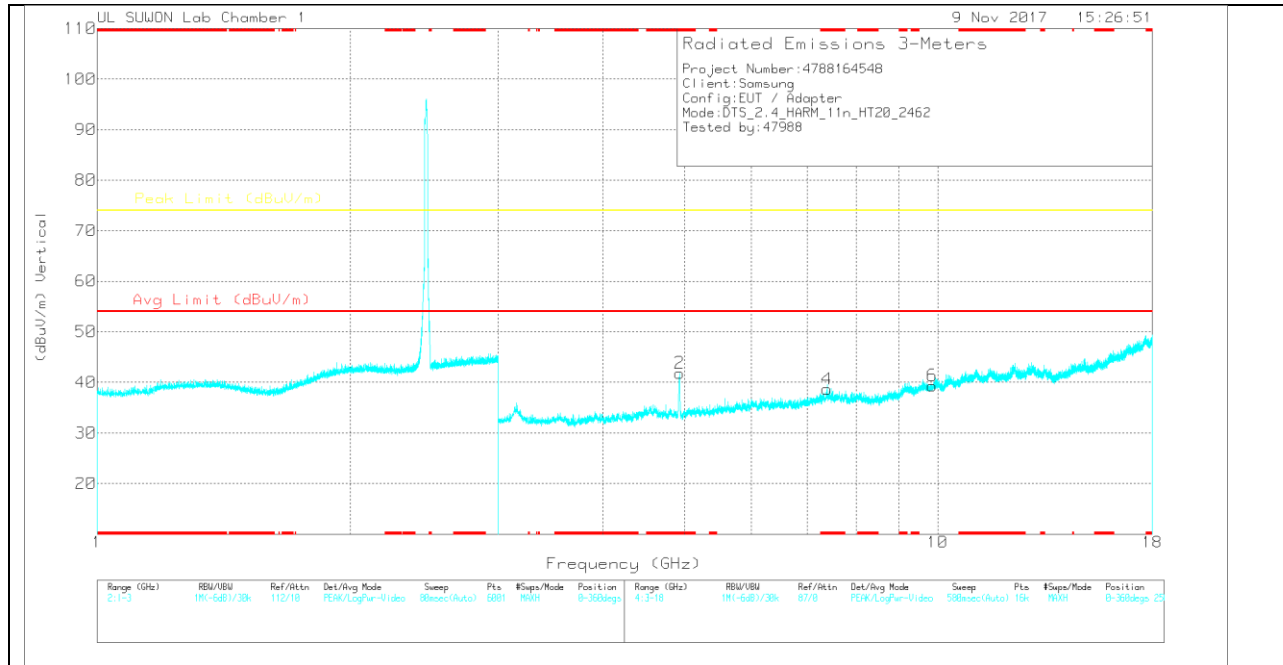

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_001687_17	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.925	42.02	PK	33.8	-31.8	0	44.02	-	-	74	-29.98	0-360	250	H
3	* 7.387	30.19	PK	35.9	-27.2	0	38.89	-	-	74	-35.11	0-360	150	H
5	9.853	26.11	PK	37	-23.4	0	39.71	-	-	74	-34.29	0-360	150	H
2	* 4.929	39.82	PK	33.8	-31.8	0	41.82	-	-	74	-32.18	0-360	150	V
4	* 7.385	29.97	PK	35.9	-27.2	0	38.67	-	-	74	-35.33	0-360	250	V
6	9.855	25.65	PK	37	-23.3	0	39.35	-	-	74	-34.65	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.928	54.29	PK2	33.8	-31.8	0	56.29	-	-	74	-17.71	246	133	H
* 4.926	38.33	MAv1	33.8	-31.8	.32	40.65	54	-13.35	-	-	246	133	H
* 4.929	53.76	PK2	33.8	-31.8	0	55.76	-	-	74	-18.24	132	171	V
* 4.927	37.69	MAv1	33.8	-31.8	.32	40.01	54	-13.99	-	-	132	171	V
* 7.385	41.34	PK2	35.9	-27.2	0	50.04	-	-	74	-23.96	240	151	H
* 7.384	27.63	MAv1	35.9	-27.2	.32	36.65	54	-17.35	-	-	240	151	H
* 7.389	38.87	PK2	35.9	-27.2	0	47.57	-	-	74	-26.43	251	130	V
* 7.384	26.43	MAv1	35.9	-27.2	.32	35.45	54	-18.55	-	-	251	130	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak


MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS ANTENNA2

LOW CHANNEL HORIZONTAL

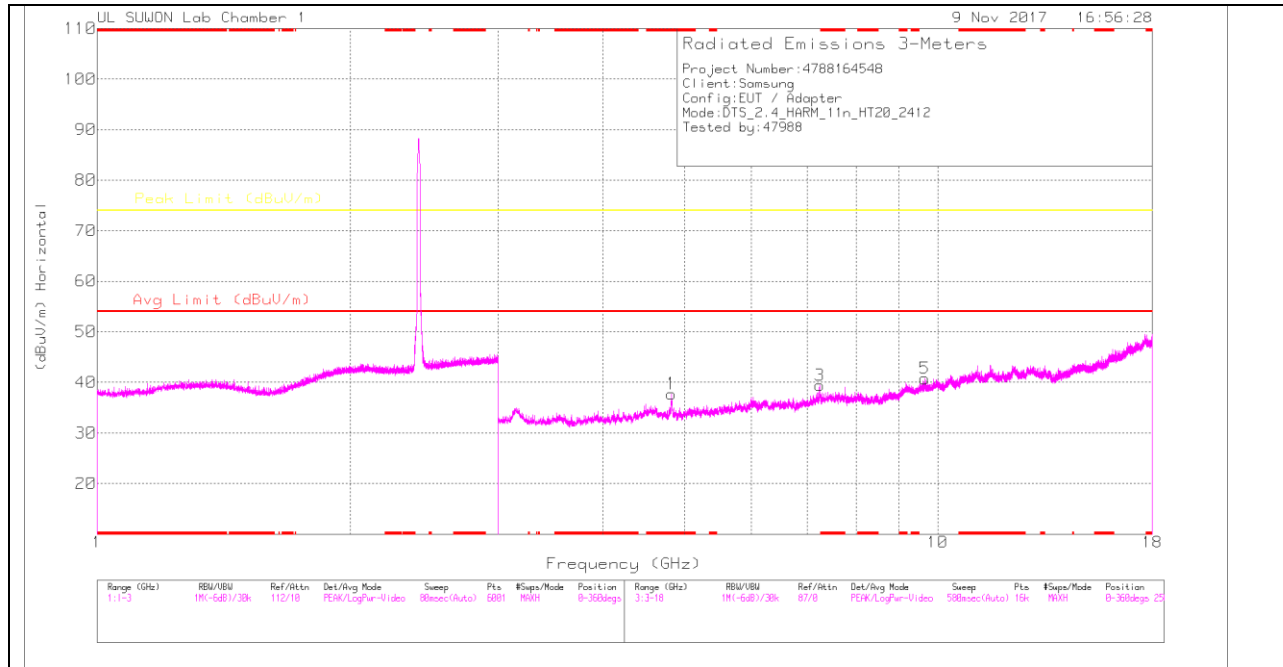

LOW CHANNEL VERTICAL

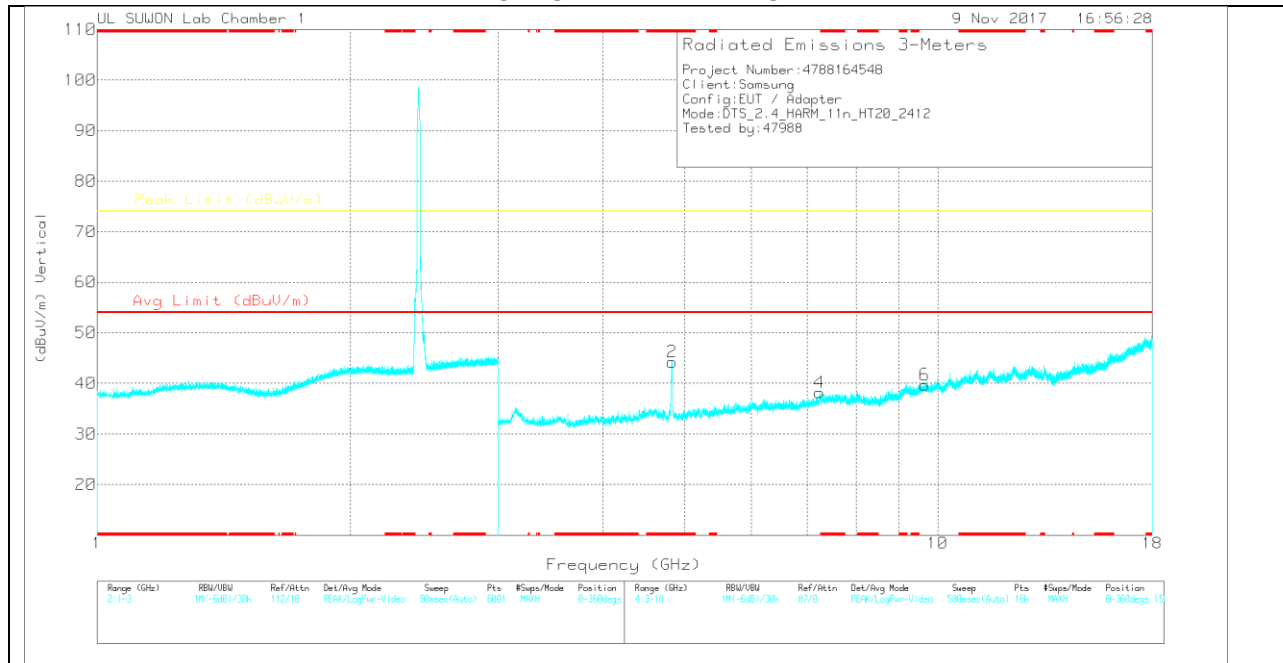

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_001687 17	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.825	35.52	PK	33.8	-31.6	0	37.72	-	-	74	-36.28	0-360	250	H
3	7.241	31.52	PK	35.9	-28	0	39.42	-	-	74	-34.58	0-360	250	H
5	9.648	27.65	PK	36.8	-23.7	0	40.75	-	-	74	-33.25	0-360	250	H
2	* 4.831	42.03	PK	33.8	-31.6	0	44.23	-	-	74	-29.77	0-360	150	V
4	7.234	30.27	PK	35.9	-28	0	38.17	-	-	74	-35.83	0-360	150	V
6	9.651	26.6	PK	36.8	-23.7	0	39.7	-	-	74	-34.3	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.823	46.51	PK2	33.8	-31.6	0	48.71	-	-	74	-25.29	122	379	H
* 4.823	34.02	MAv1	33.8	-31.6	.32	36.54	54	-17.46	-	-	122	379	H
* 4.828	52.19	PK2	33.8	-31.6	0	54.39	-	-	74	-19.61	177	160	V
* 4.827	39.68	MAv1	33.8	-31.6	.32	42.2	54	-11.8	-	-	177	160	V
7.239	42.09	PK2	35.9	-28	0	49.99	-	-	74	-24.01	183	168	H
7.242	40.57	PK2	35.9	-28	0	48.47	-	-	74	-25.53	215	280	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak


MAv1 - KDB558074 Option 1 Maximum RMS Average

Note: Frequency range 7239MHz to 7242MHz is non-restricted band so only peak measurement was performed .

MID CHANNEL HORIZONTAL

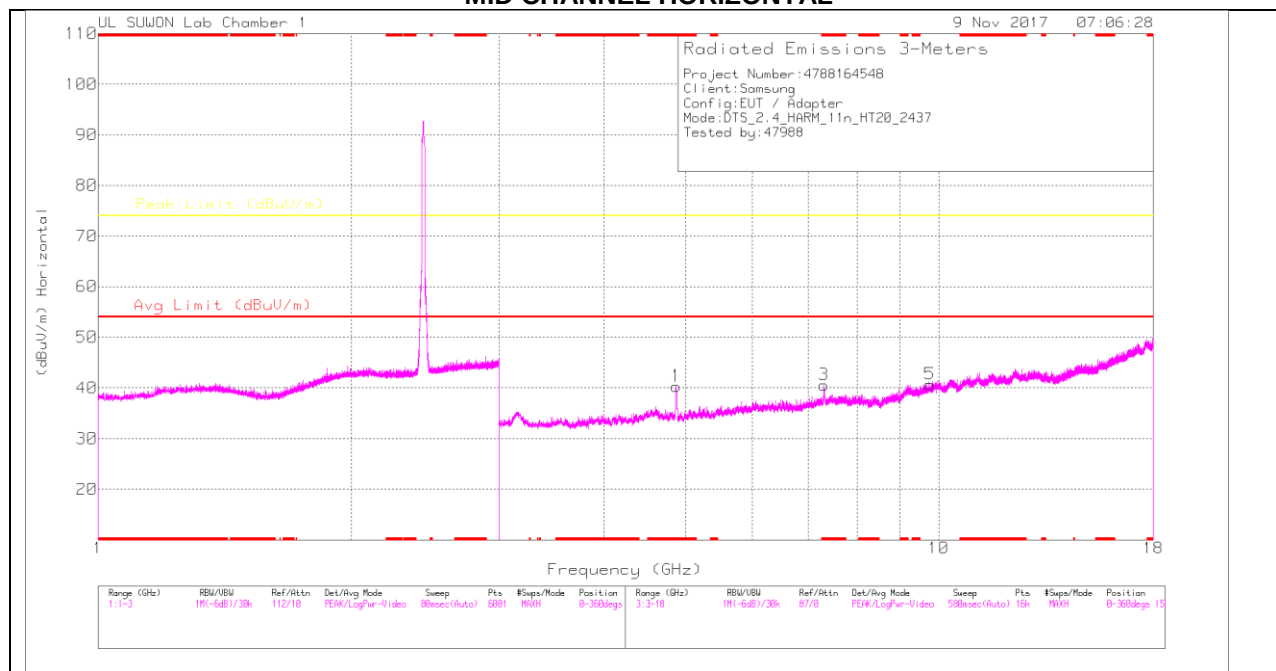

MID CHANNEL VERTICAL

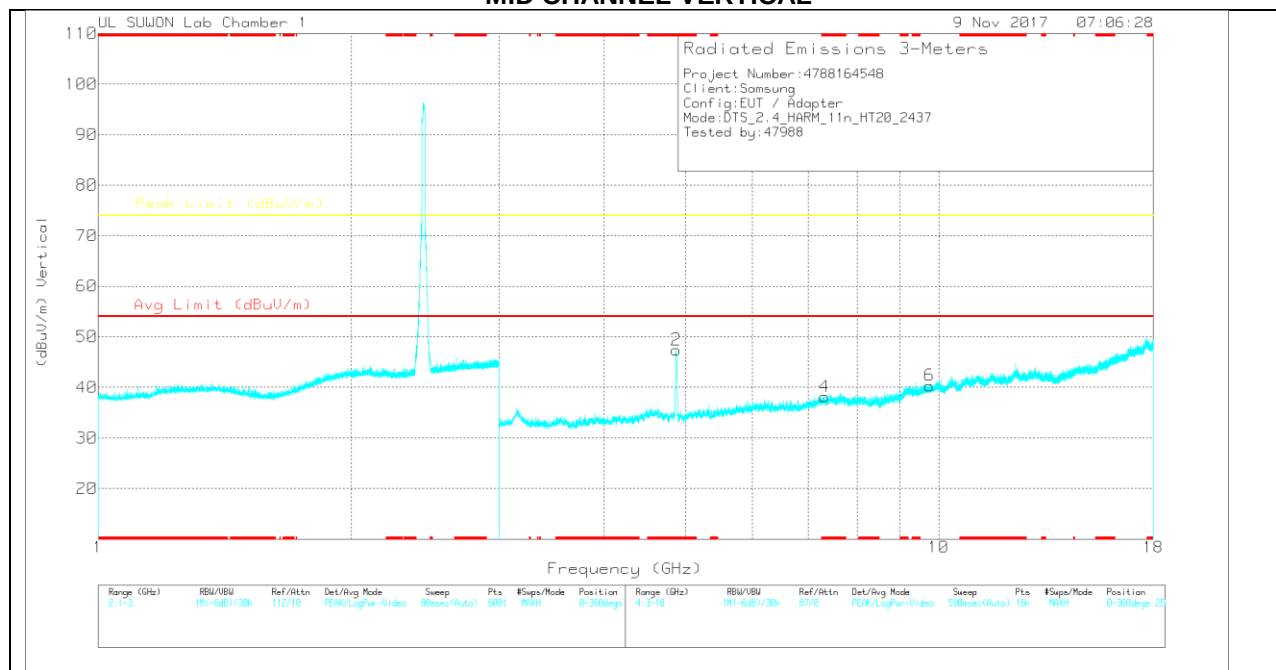

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_001687_17	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.876	38.23	PK	33.8	-31.7	0	40.33	-	-	74	-33.67	0-360	150	H
3	* 7.307	32.4	PK	35.9	-27.7	0	40.6	-	-	74	-33.4	0-360	150	H
5	9.75	28.03	PK	36.9	-24.2	0	40.73	-	-	74	-33.27	0-360	150	H
2	* 4.874	45.31	PK	33.8	-31.7	0	47.41	-	-	74	-26.59	0-360	150	V
4	* 7.312	29.85	PK	35.9	-27.6	0	38.15	-	-	74	-35.85	0-360	250	V
6	9.751	27.66	PK	36.9	-24.2	0	40.36	-	-	74	-33.64	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.875	48.42	PK2	33.8	-31.7	0	50.52	-	-	74	-23.48	227	148	H
* 4.874	35.97	MAv1	33.8	-31.7	.32	38.39	54	-15.61	-	-	227	148	H
* 4.873	55.19	PK2	33.8	-31.7	0	57.29	-	-	74	-16.71	172	156	V
* 4.873	42.81	MAv1	33.8	-31.7	.32	45.23	54	-8.77	-	-	172	156	V
* 7.316	41.95	PK2	35.9	-27.6	0	50.25	-	-	74	-23.75	183	136	H
* 7.312	29.31	MAv1	35.9	-27.6	.32	37.93	54	-16.07	-	-	183	136	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL HORIZONTAL

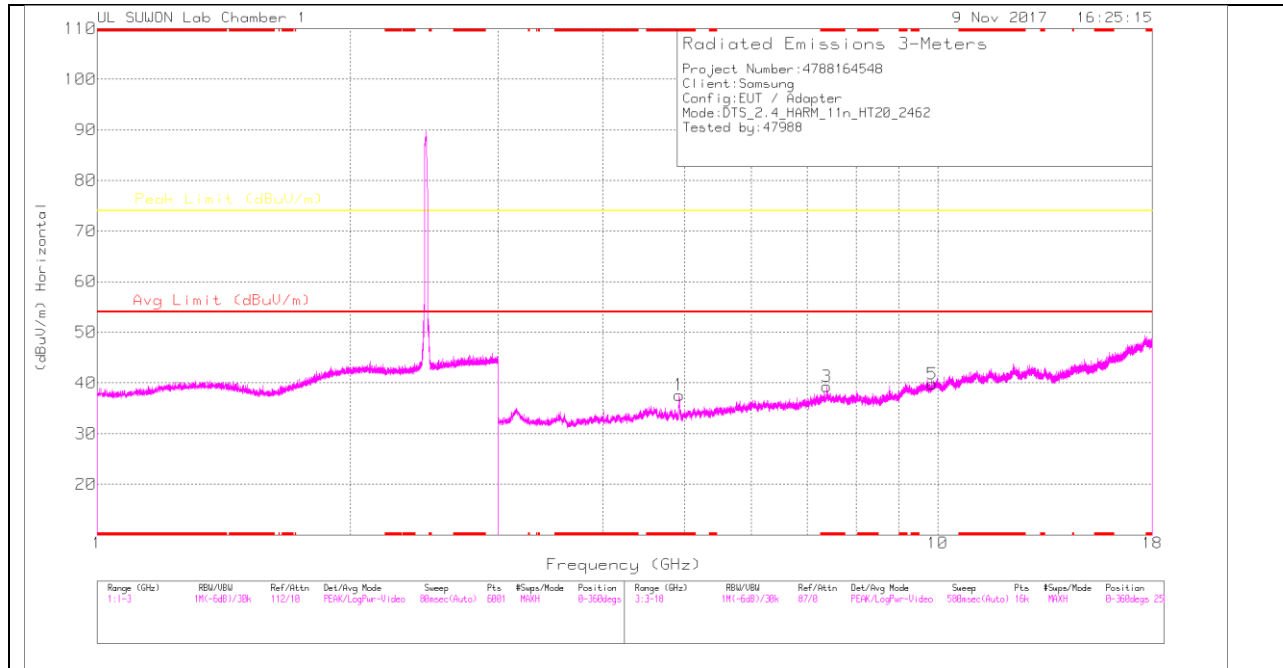

HIGH CHANNEL VERTICAL

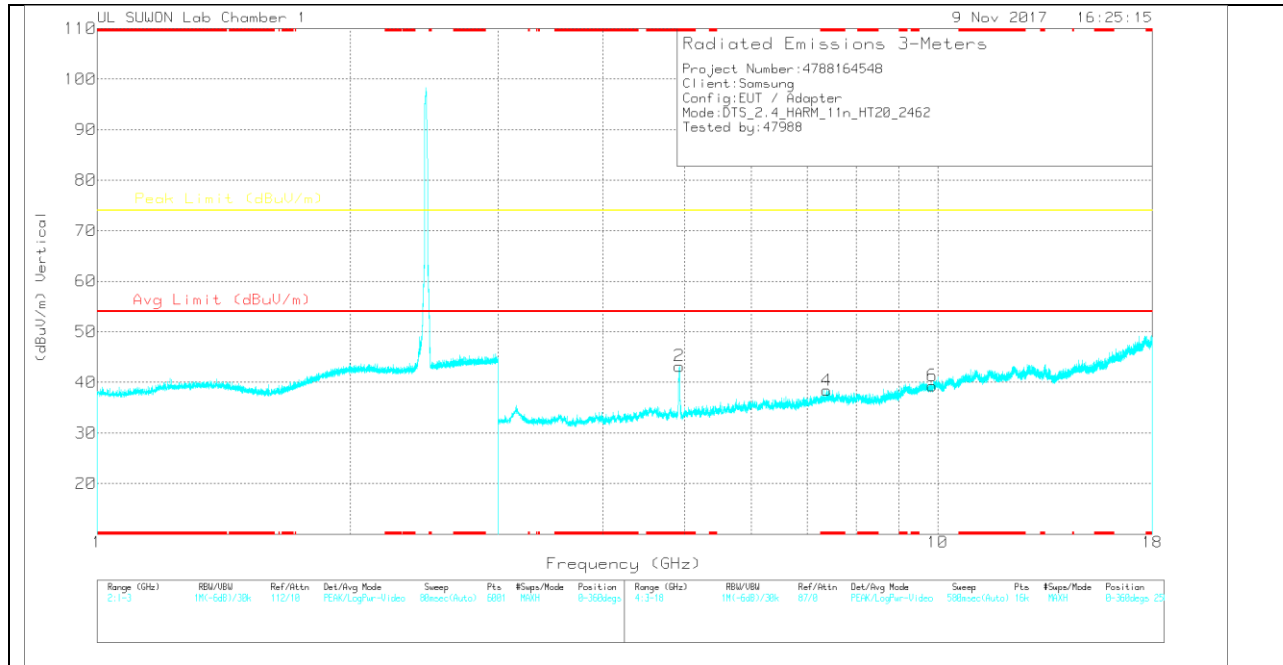

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_001687_17	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.927	35.58	PK	33.8	-31.8	0	37.58	-	-	74	-36.42	0-360	150	H
3	* 7.383	30.61	PK	35.9	-27.2	0	39.31	-	-	74	-34.69	0-360	150	H
5	9.852	26.19	PK	37	-23.4	0	39.79	-	-	74	-34.21	0-360	150	H
2	* 4.928	41.21	PK	33.8	-31.8	0	43.21	-	-	74	-30.79	0-360	250	V
4	* 7.383	29.83	PK	35.9	-27.3	0	38.43	-	-	74	-35.57	0-360	150	V
6	9.855	25.63	PK	37	-23.3	0	39.33	-	-	74	-34.67	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.927	45.09	PK2	33.8	-31.8	0	47.09	-	-	74	-26.91	88	151	H
* 4.926	33.31	MAv1	33.8	-31.8	.32	35.63	54	-18.37	-	-	88	151	H
* 4.923	50.86	PK2	33.8	-31.8	0	52.86	-	-	74	-21.14	176	215	V
* 4.926	37.92	MAv1	33.8	-31.8	.32	40.24	54	-13.76	-	-	176	215	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak


MAv1 - KDB558074 Option 1 Maximum RMS Average

HARMONICS AND SPURIOUS EMISSIONS 2TX CDD

LOW CHANNEL HORIZONTAL

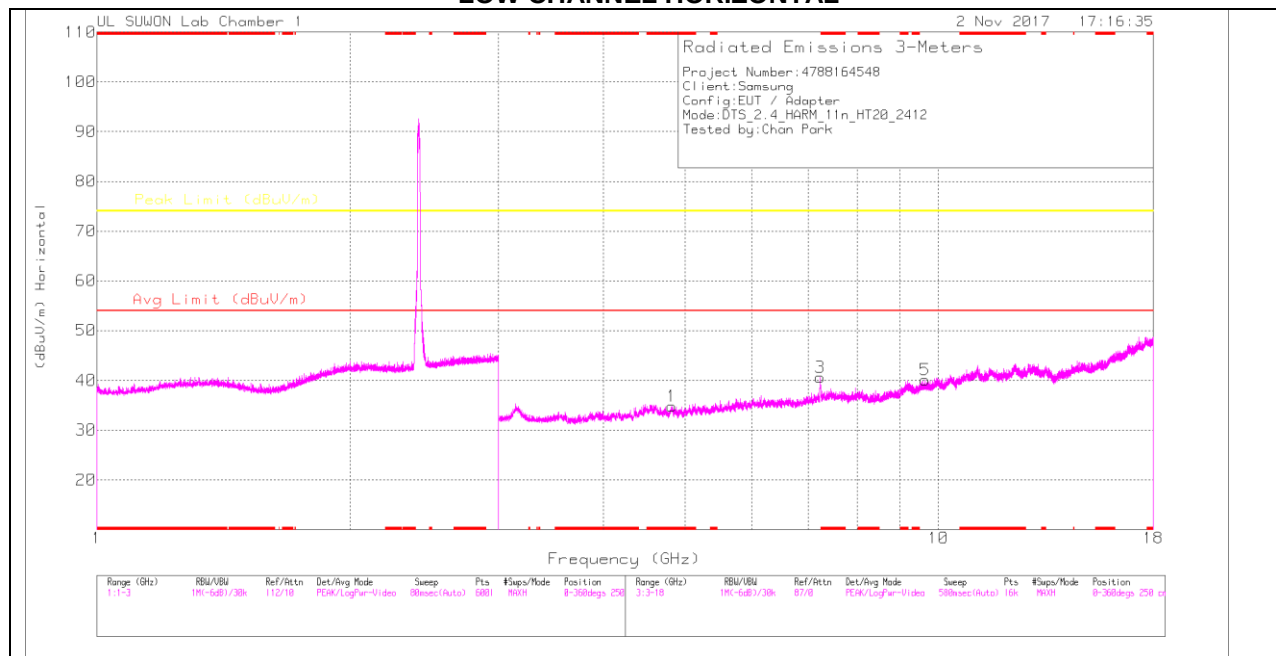

LOW CHANNEL VERTICAL

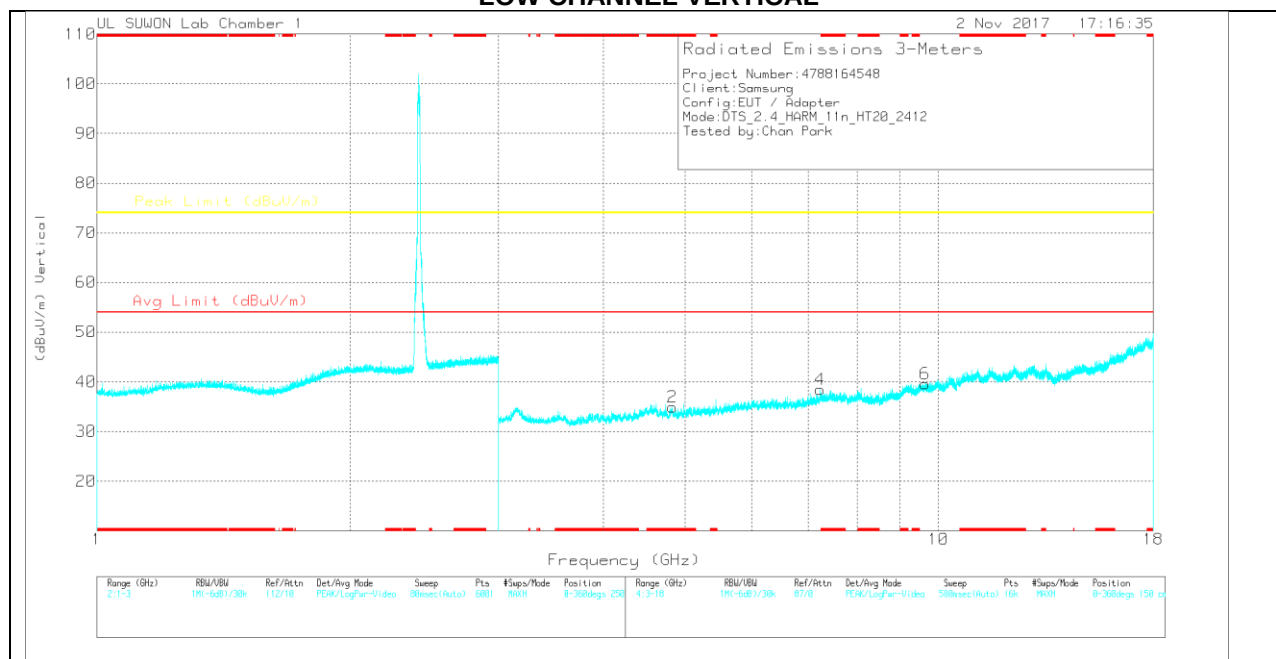

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_001687_17	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.819	32.62	PK	33.8	-31.6	0	34.82	-	-	74	-39.18	0-360	250	H
3	7.234	32.66	PK	35.9	-28	0	40.56	-	-	74	-33.44	0-360	150	H
5	9.641	26.87	PK	36.8	-23.6	0	40.07	-	-	74	-33.93	0-360	250	H
2	* 4.831	32.67	PK	33.8	-31.6	0	34.87	-	-	74	-39.13	0-360	150	V
4	7.236	30.51	PK	35.9	-28	0	38.41	-	-	74	-35.59	0-360	250	V
6	9.644	26.41	PK	36.8	-23.6	0	39.61	-	-	74	-34.39	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	3GHz_HP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
7.235	42.92	PK2	35.9	-28.1	0	50.72	-	-	74	-23.28	182	135	H
7.23	40.45	PK2	35.9	-28	0	48.35	-	-	74	-25.65	218	148	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

Note: Frequency range 7230MHz to 7235MHz is non-restricted band so only peak measurement was performed .