





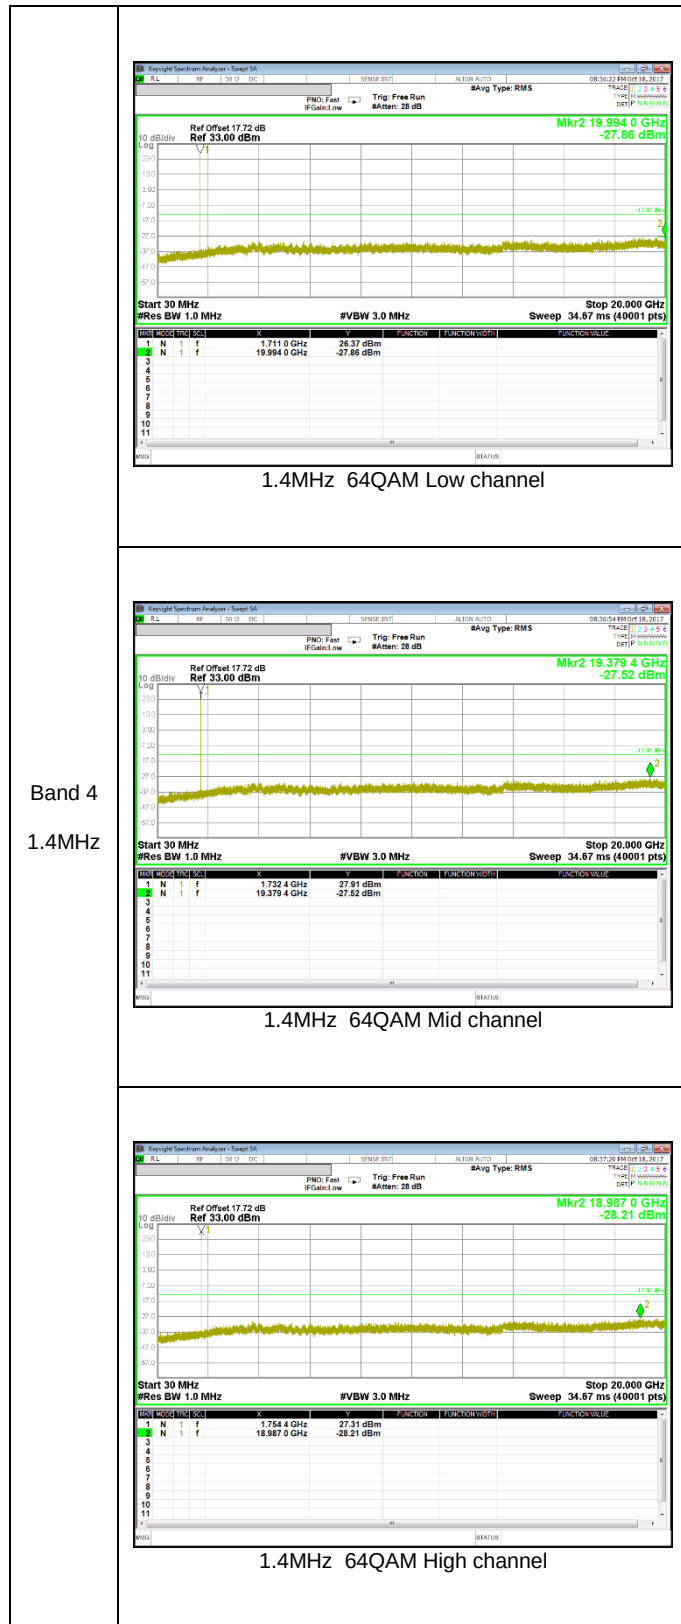



LTE Band 41

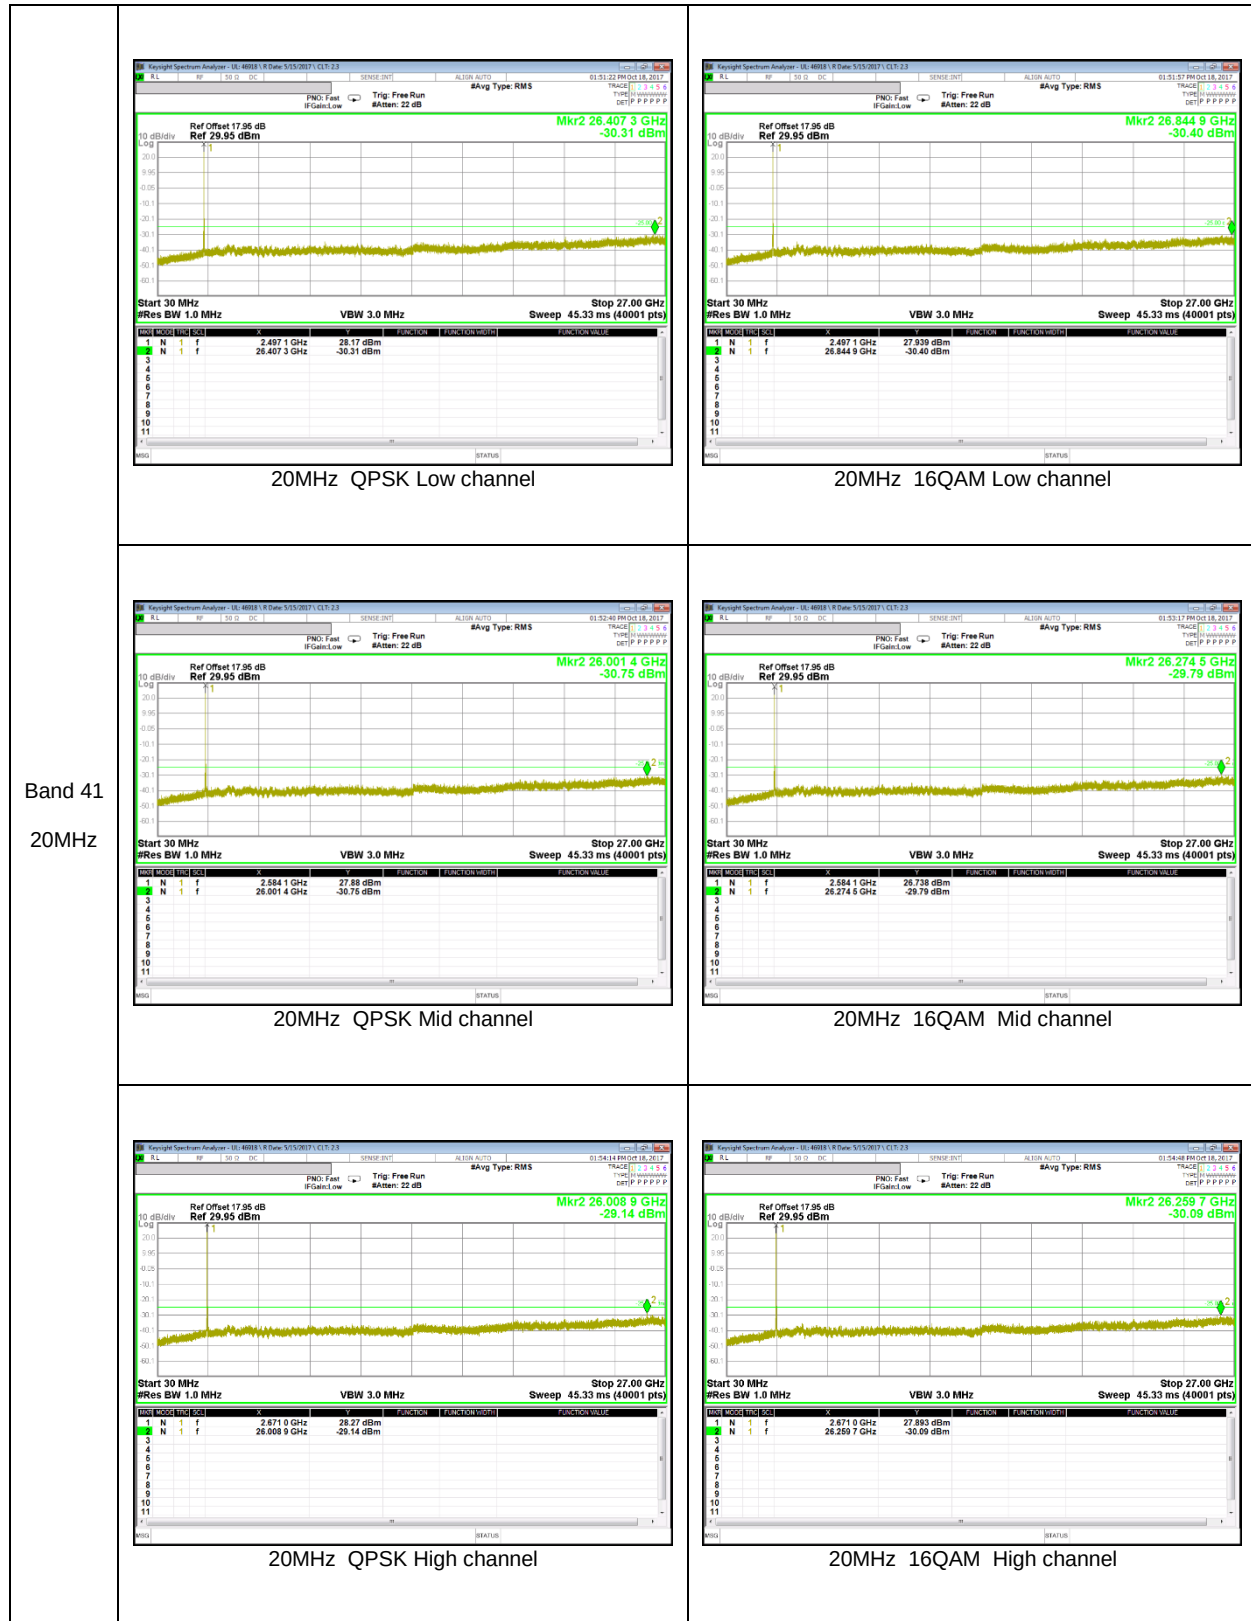


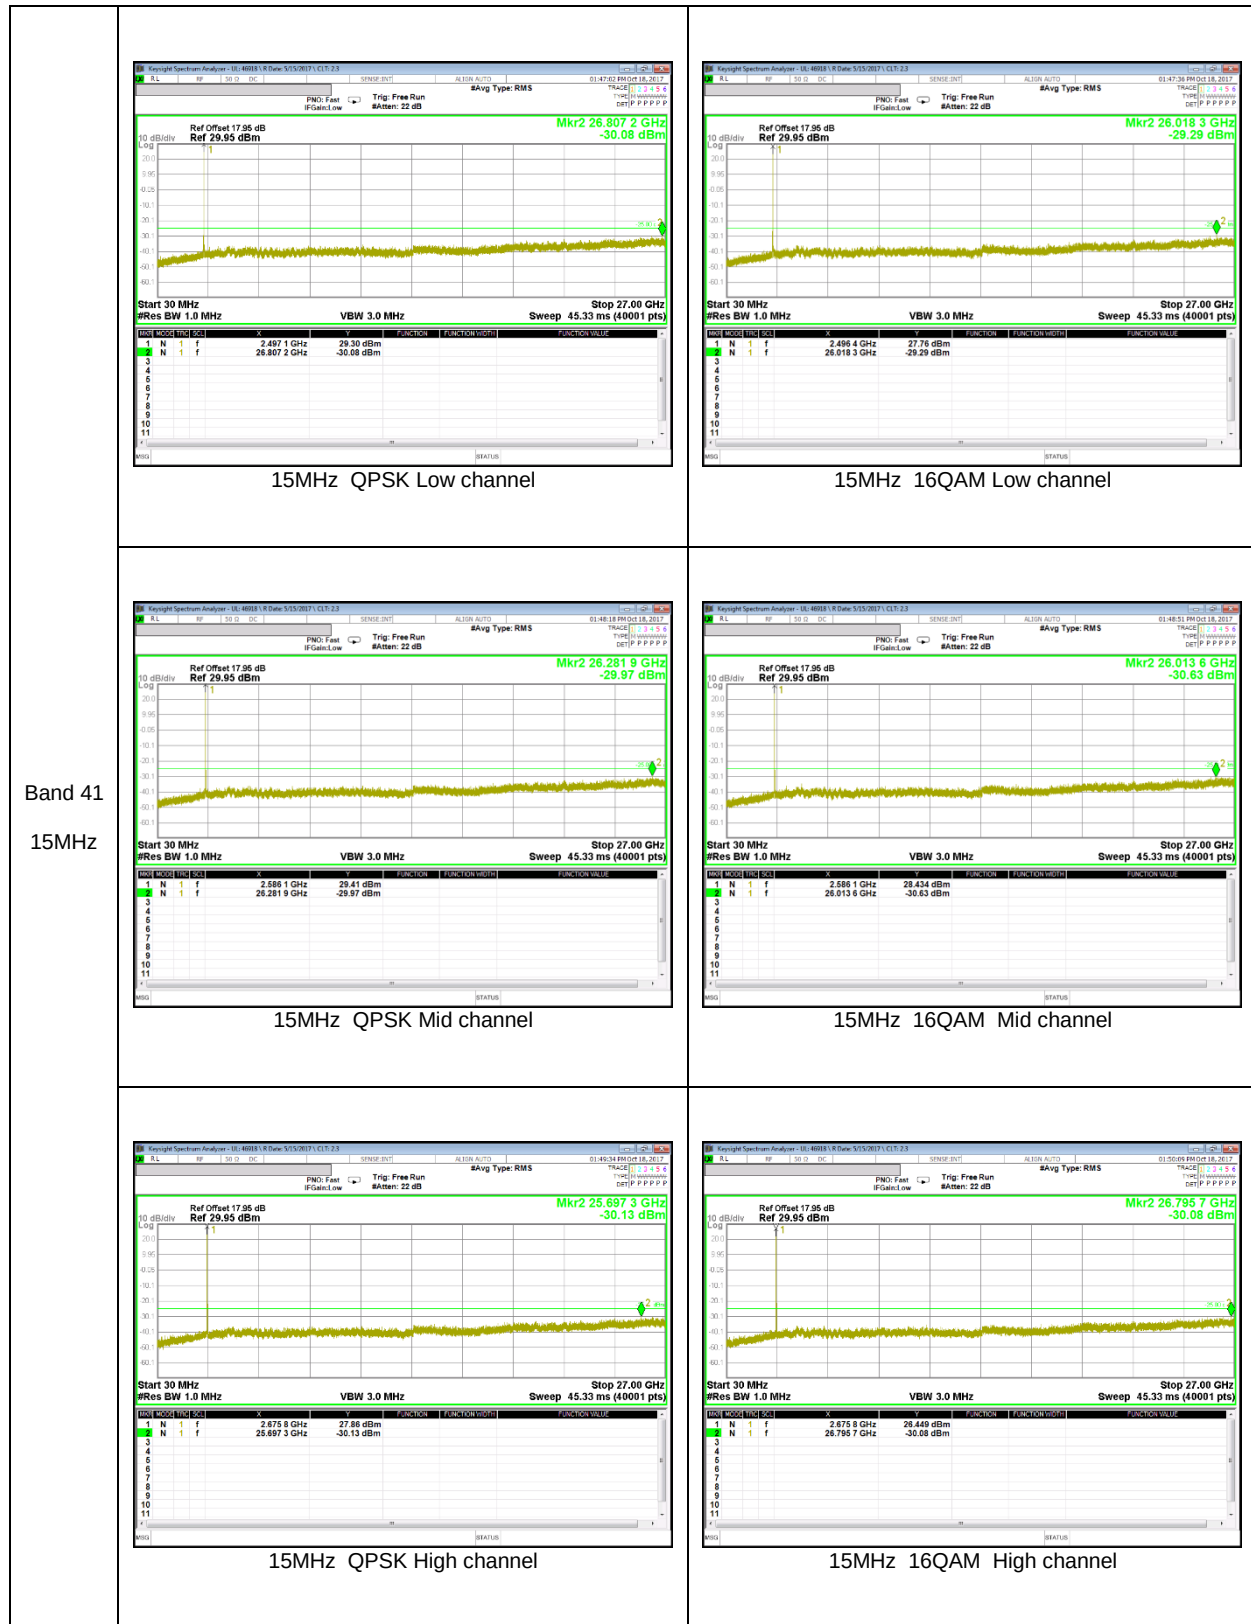


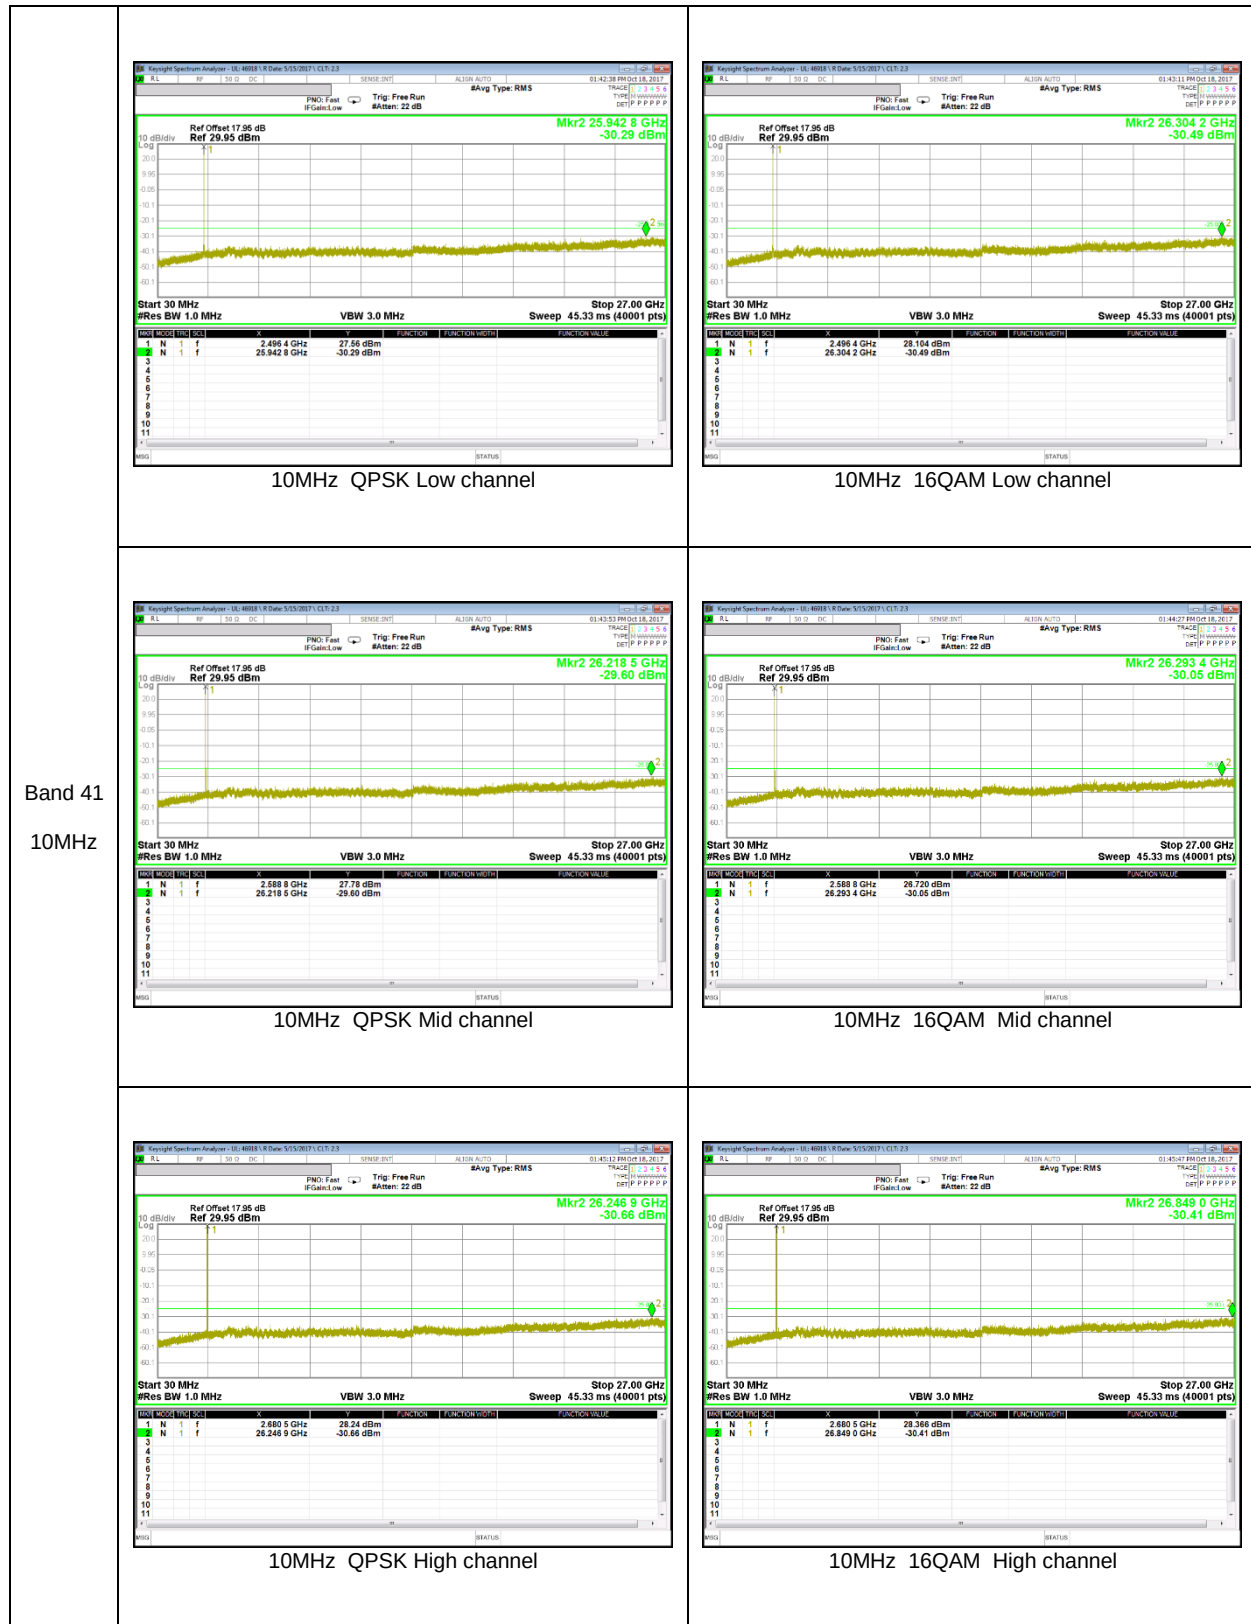


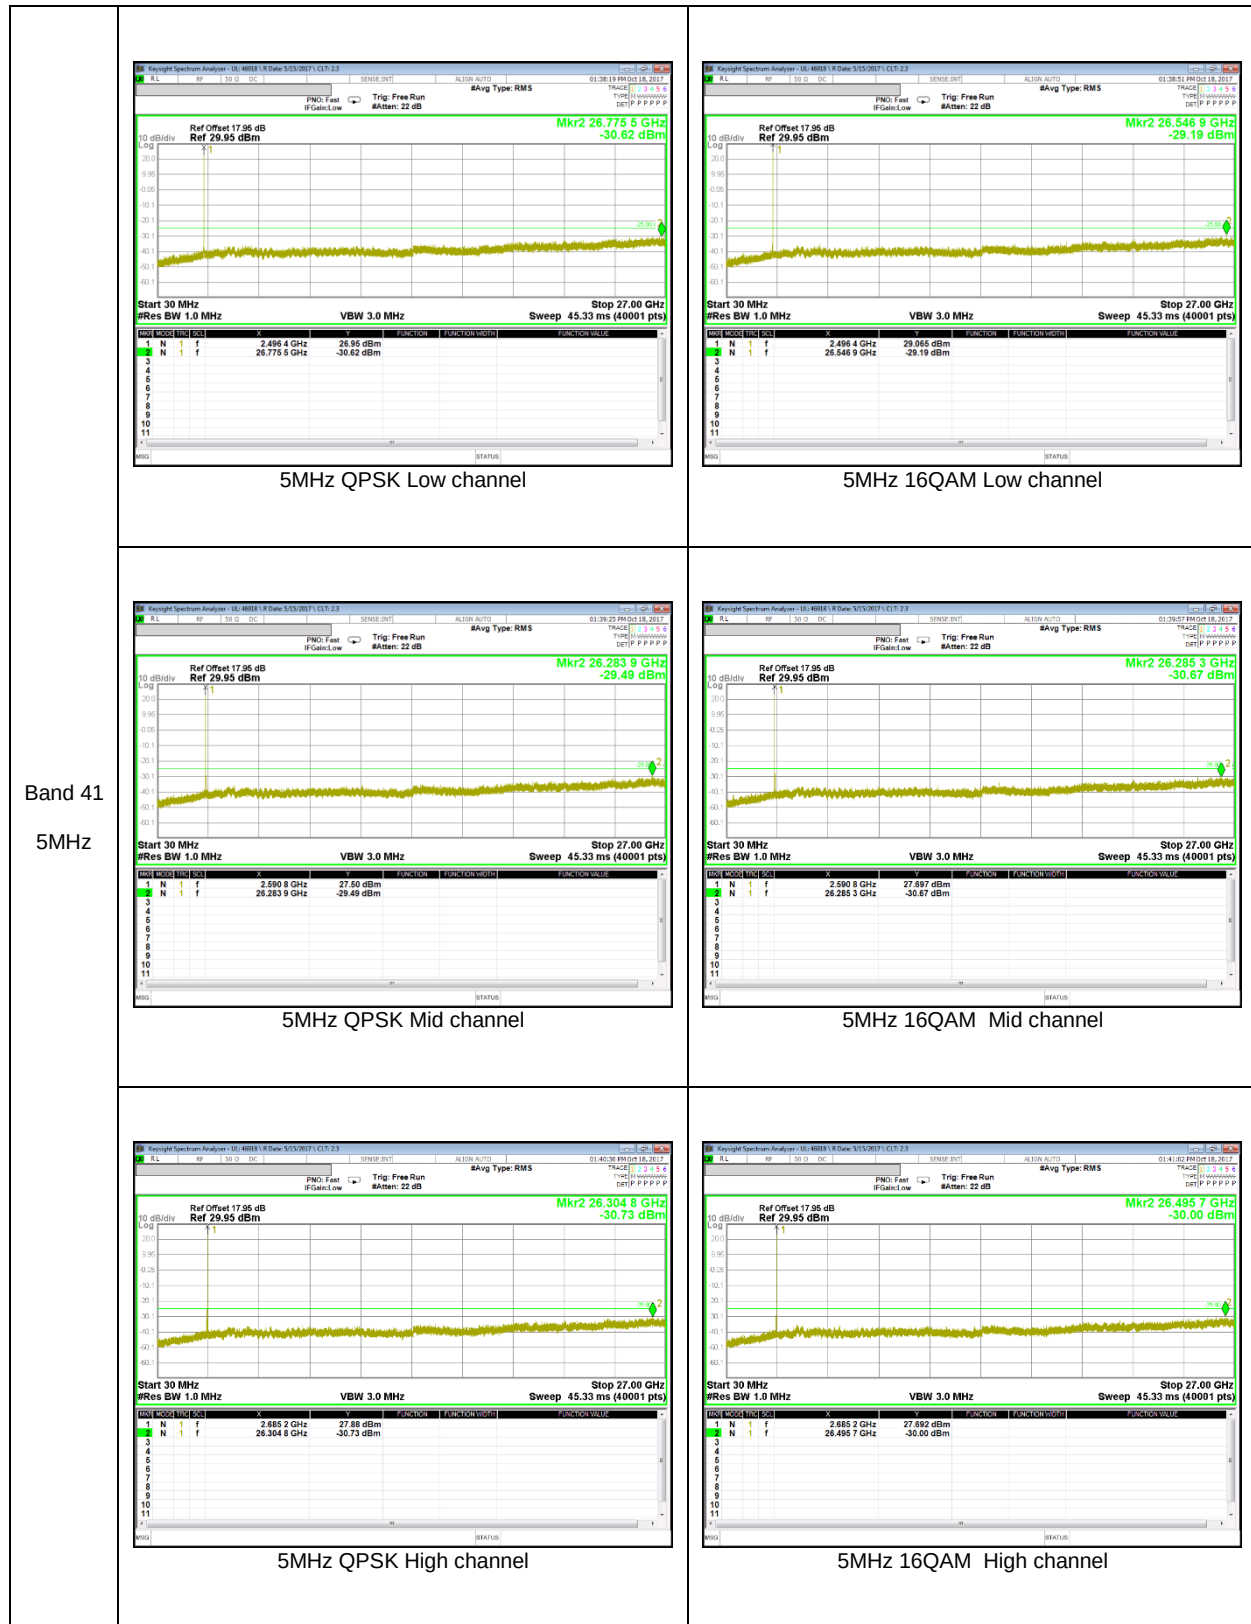

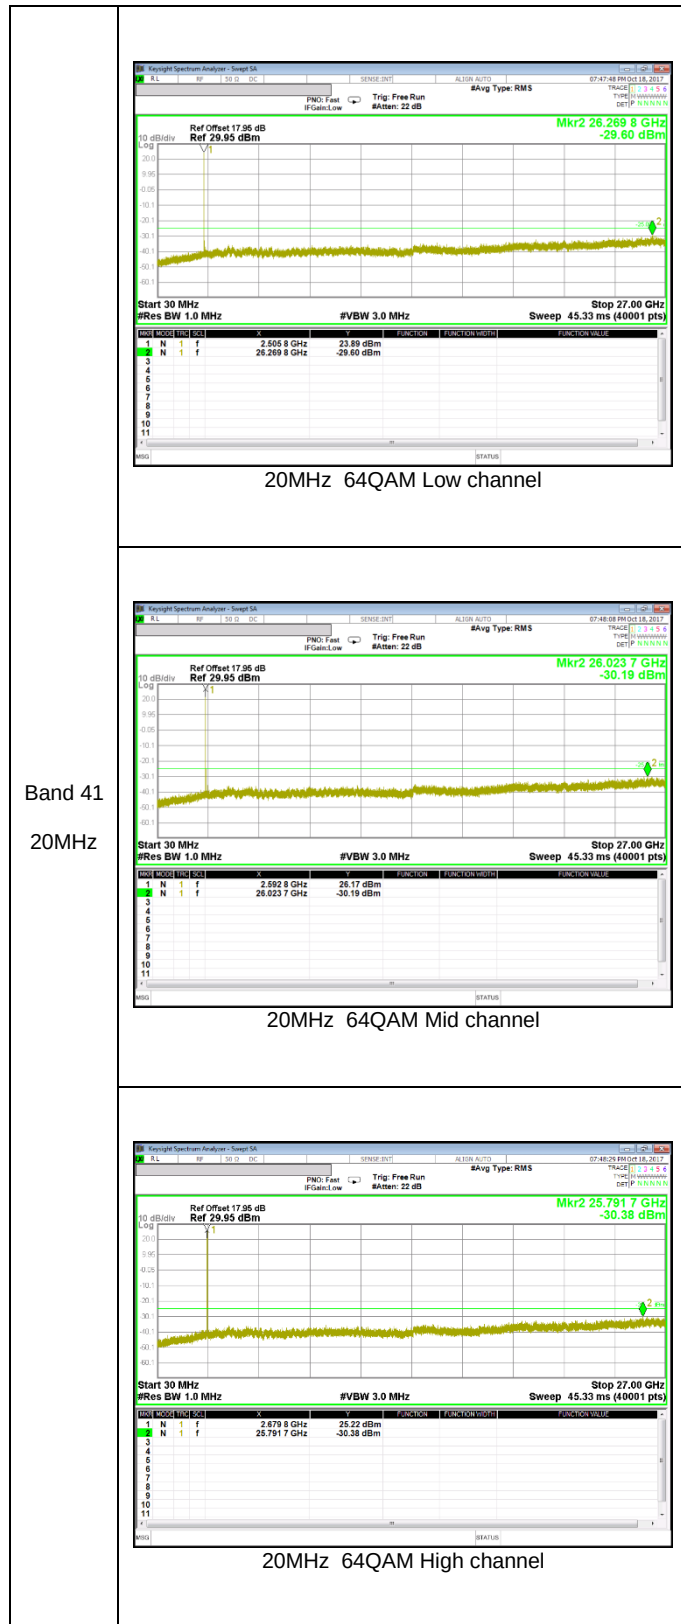

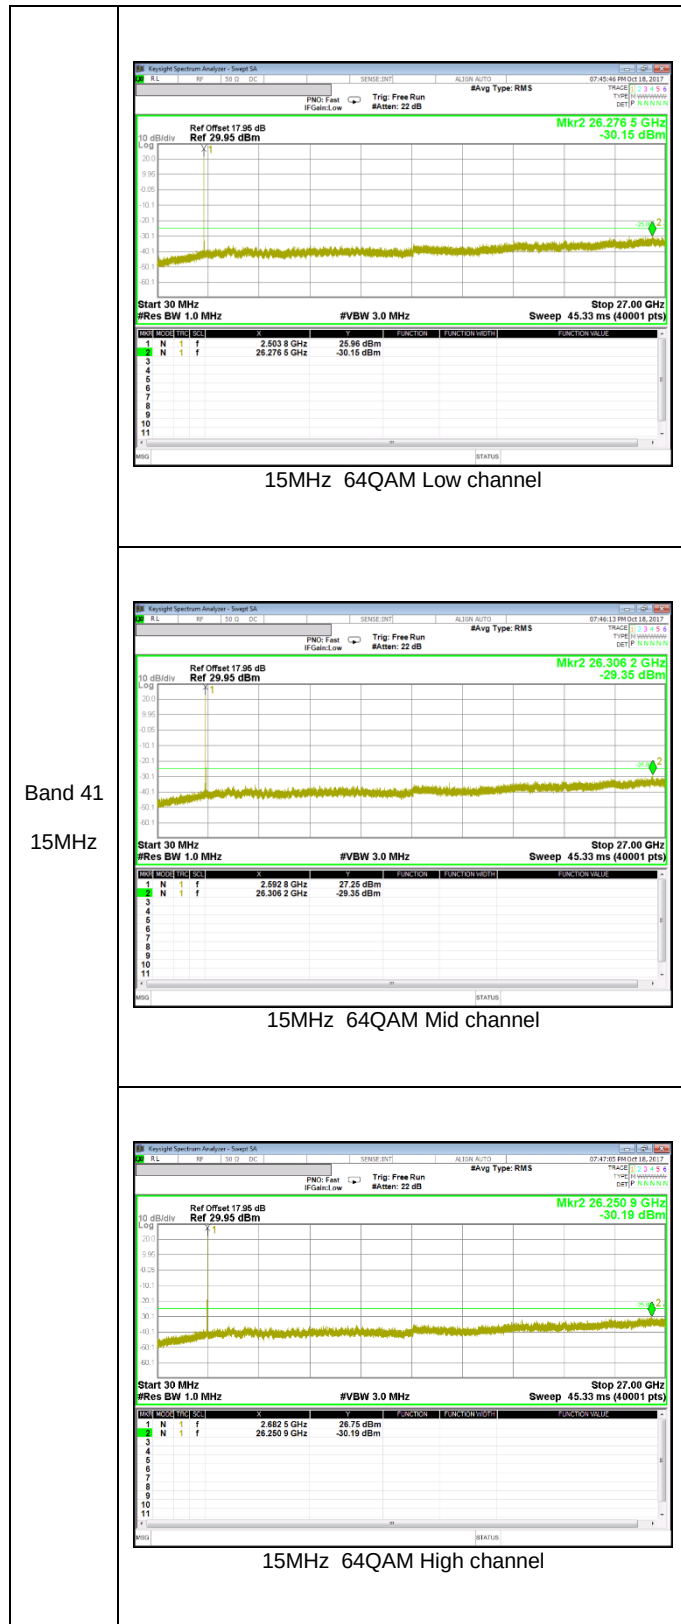

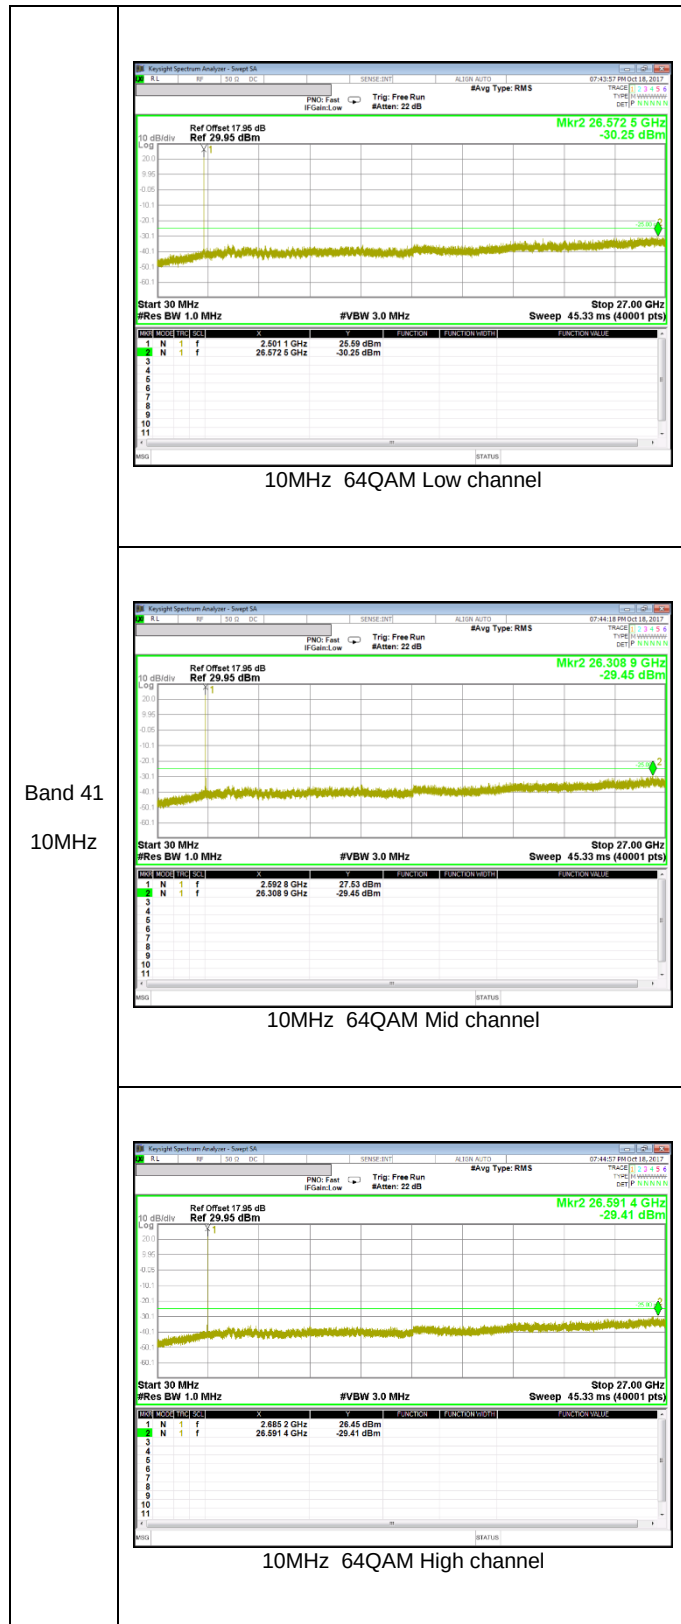

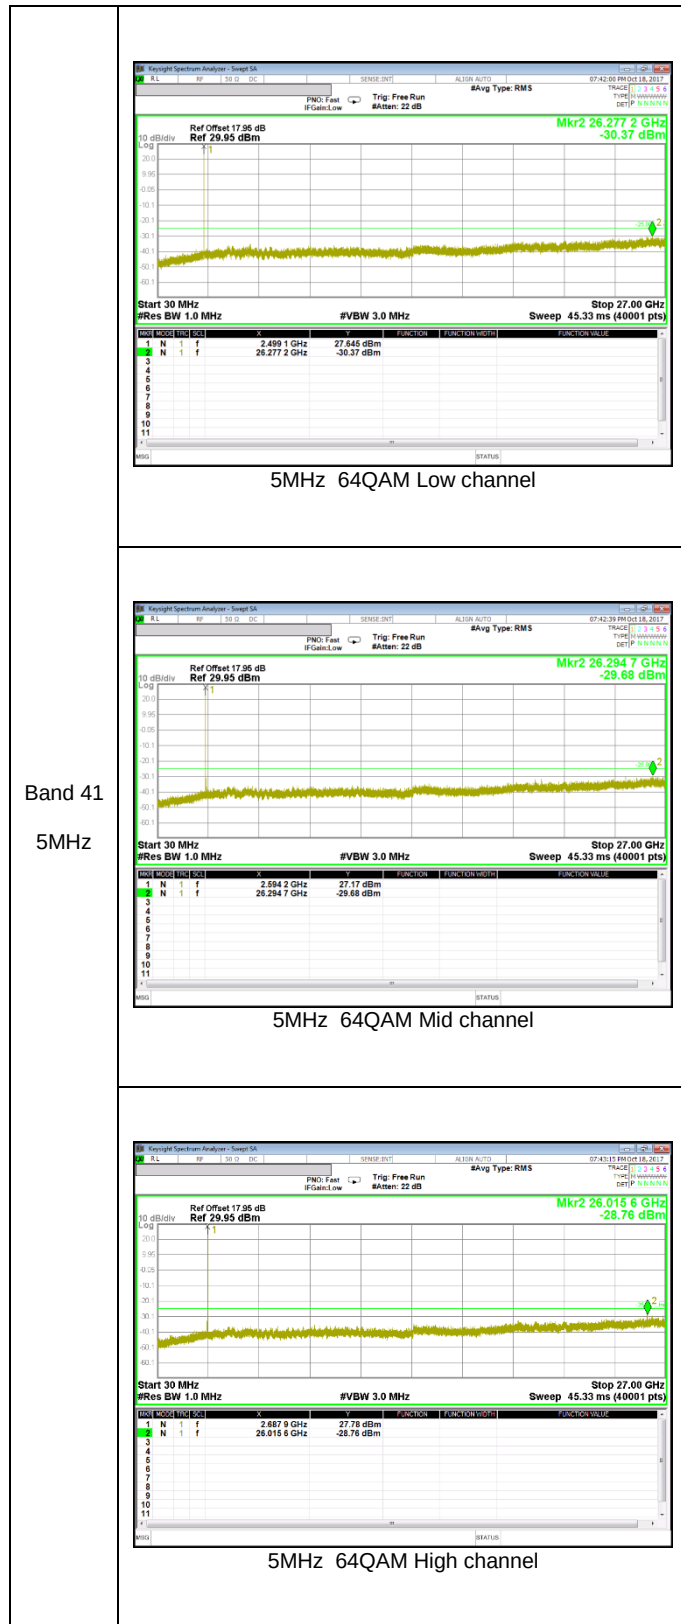

9.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235 and §27.54

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

§27.54 - The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v03

RESULTS

See the following pages.

9.4.1. FREQUENCY STABILITY RESULTS

BC0 1xRTT , Channel 384, Frequency 836.52 MHz

Reference Frequency: CDMA Mid Channel 836.52 MHz @ 20°C Limit: +- 2.5 ppm = 2091.300 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.85	50	836.52001611	-0.001	2.5
3.85	40	836.52001674	-0.002	2.5
3.85	30	836.52001388	0.001	2.5
3.85	20	836.52001505	0	2.5
3.85	10	836.52001310	0.002	2.5
3.85	0	836.52001667	-0.002	2.5
3.85	-10	836.52001461	0.001	2.5
3.85	-20	836.52001359	0.002	2.5
3.85	-30	836.52001579	-0.001	2.5

Reference Frequency: CDMA Mid Channel 836.52 MHz @ 20°C Limit: +- 2.5 ppm = 2091.300 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.85	20	836.52001505	0	2.5
4.35	20	836.52001491	0.000	2.5
3.50	20	836.52001637	-0.002	2.5

GSM 1900, Channel 661, Frequency 1880.0 MHz

Reference Frequency: GSM1900 Mid Channel 1880.0 MHz @ 20°C				
Limit: +- 2.5 ppm = 4700.000 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.85	50	1880.00002602	-0.001	2.5
3.85	40	1880.00002618	-0.002	2.5
3.85	30	1880.00002244	0.000	2.5
3.85	20	1880.00002330	0	2.5
3.85	10	1880.00002590	-0.001	2.5
3.85	0	1880.00002007	0.002	2.5
3.85	-10	1880.00002173	0.001	2.5
3.85	-20	1880.00002831	-0.003	2.5
3.85	-30	1880.00002132	0.001	2.5

Reference Frequency: GSM1900 Mid Channel 1880.0 MHz @ 20°C				
Limit: +- 2.5 ppm = 4700.000 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.85	20	1880.00002330	0	2.5
4.35	20	1880.00002262	0.000	2.5
3.50	20	1880.00002170	0.001	2.5

WCDMA Band 5 , Channel 4183, Frequency 836.6 MHz

Reference Frequency: WCDMA Band 5 Mid Channel 836.6 MHz @ 20°C				
Limit: +- 2.5 ppm = 2091.500 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.85	50	836.59999165	0.002	2.5
3.85	40	836.59999242	0.001	2.5
3.85	30	836.59999334	0.000	2.5
3.85	20	836.59999313	0	2.5
3.85	10	836.59999276	0.000	2.5
3.85	0	836.59999304	0.000	2.5
3.85	-10	836.59999445	-0.002	2.5
3.85	-20	836.59999272	0.000	2.5
3.85	-30	836.59999338	0.000	2.5

Reference Frequency: WCDMA Band 5 Mid Channel 836.6 MHz @ 20°C				
Limit: +- 2.5 ppm = 2091.500 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.85	20	836.59999313	0	2.5
4.35	20	836.59999310	0.000	2.5
3.50	20	836.59999318	0.000	2.5

WCDMA Band 2 , Channel 9400, Frequency 1880.0 MHz

Reference Frequency: WCDMA Band 2 Mid Channel 1880.0 MHz @ 20°C				
Limit: +- 2.5 ppm = 4700.000 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.85	50	1880.00001579	-0.001	2.5
3.85	40	1880.00001511	-0.001	2.5
3.85	30	1880.00001518	-0.001	2.5
3.85	20	1880.00001388	0	2.5
3.85	10	1880.00001284	0.001	2.5
3.85	0	1880.00001474	0.000	2.5
3.85	-10	1880.00001730	-0.002	2.5
3.85	-20	1880.00001738	-0.002	2.5
3.85	-30	1880.00001430	0.000	2.5

Reference Frequency: WCDMA Band 2 Mid Channel 1880.0 MHz @ 20°C				
Limit: +- 2.5 ppm = 4700.000 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.85	20	1880.00001388	0	2.5
4.35	20	1880.00001477	0.000	2.5
3.50	20	1880.00001503	-0.001	2.5

LTE Band 5 , Channel 20524, Frequency 836.5 MHz

Reference Frequency: LTE Band 5 Mid Channel 836.5 MHz @ 20°C				
Limit: +- 2.5 ppm = 2091.250 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.85	50	836.49999255	0.001	2.5
3.85	40	836.49999346	0.000	2.5
3.85	30	836.49999272	0.001	2.5
3.85	20	836.49999329	0	2.5
3.85	10	836.49999197	0.002	2.5
3.85	0	836.49999151	0.002	2.5
3.85	-10	836.49999239	0.001	2.5
3.85	-20	836.49999144	0.002	2.5
3.85	-30	836.49999103	0.003	2.5

Reference Frequency: LTE Band 5 Mid Channel 836.5 MHz @ 20°C				
Limit: +- 2.5 ppm = 2091.250 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.85	20	836.49999329	0	2.5
4.35	20	836.49999215	0.001	2.5
3.50	20	836.49999338	0.000	2.5

LTE Band 4, Channel 20174, Frequency 1732.5 MHz

Reference Frequency: LTE Band 4 Mid Channel 1732.5 MHz @ 20°C				
Limit: +- 2.5 ppm = 4331.250 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.85	50	1732.50001792	0.000	2.5
3.85	40	1732.50001667	0.001	2.5
3.85	30	1732.50001851	0.000	2.5
3.85	20	1732.50001771	0	2.5
3.85	10	1732.50001847	0.000	2.5
3.85	0	1732.50001645	0.001	2.5
3.85	-10	1732.50001891	-0.001	2.5
3.85	-20	1732.50001730	0.000	2.5
3.85	-30	1732.50001853	0.000	2.5

Reference Frequency: LTE Band 4 Mid Channel 1732.5 MHz @ 20°C				
Limit: +- 2.5 ppm = 4331.250 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.85	20	1732.50001771	0	2.5
4.35	20	1732.50001433	0.002	2.5
3.50	20	1732.50001810	0.000	2.5

LTE Band 41, Channel 40620, Frequency 2593.0 MHz

Reference Frequency: LTE Band 41 Mid Channel 2593 MHz @ 20°C				
Limit: +- 2.5 ppm = 6482.500 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.85	50	2593.00002824	0.000	2.5
3.85	40	2593.00002564	0.001	2.5
3.85	30	2593.00002648	0.001	2.5
3.85	20	2593.00002918	0	2.5
3.85	10	2593.00002768	0.001	2.5
3.85	0	2593.00002782	0.001	2.5
3.85	-10	2593.00002817	0.000	2.5
3.85	-20	2593.00002606	0.001	2.5
3.85	-30	2593.00002505	0.002	2.5

Reference Frequency: LTE Band 41 Mid Channel 2593 MHz @ 20°C				
Limit: +- 2.5 ppm = 6482.500 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.85	20	2593.00002918	0	2.5
4.35	20	2593.00002616	0.001	2.5
3.50	20	2593.00002820	0.000	2.5

10. RADIATED TEST RESULTS

10.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232 and §27.50

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

27.50(h) - (2) Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

27.50(d) - (4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

TEST PROCEDURE

ANSI / TIA / EIA 603 E Clause 2.2.17; ESU40 setting reference to 971168 D01 v03

For peak power measurement with a ESU40:

a) Set the RBW $\geq$ OBW; b) Set VBW $\geq 3 \times$ RBW; c) Set span $\geq 2 \times$ RBW; d) Sweep time = auto couple; e) Detector = peak; f) Ensure that the number of measurement points $\geq$ span/RBW; g) Trace mode = max hold;

For average power measurement with a ESU40:

a) Set span to at least 1.5 times the OBW; b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz; c) Set VBW $\geq 3 \times$ RBW; d) Set number of points in sweep $\geq 2 \times$ span / RBW; e) Sweep time = auto-couple; f) Detector = RMS (power averaging); g) Use free run trigger If burst duty cycle ≥ 98 ; h) Use trigger to capture bursts If burst duty cycle < 98 ; i) Trace average at least 100 traces in power averaging (i.e., RMS) mode. j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function. (RBW/VBW are automatically set for LTE B41)

TEST RESULTS

10.1.1. ERP/EIRP Results

CDMA

Band	Mode	Channel	f [MHz]	ERP / EIRP	
				[dBm]	[mW]
BC0	1xRTT	1013	824.70	20.30	107.15
		384	836.52	21.19	131.52
		777	848.31	18.98	79.07
	EVDO Rel.0	1013	824.70	18.64	73.11
		384	836.52	21.15	130.32
		777	848.31	17.16	52.00

GSM

Band	Mode	Channel	f [MHz]	ERP / EIRP	
				[dBm]	[mW]
GSM1900	GPRS	512	1850.2	30.06	1013.91
		661	1880.0	31.30	1348.96
		810	1909.8	30.90	1230.27
	EGPRS	512	1850.2	26.76	474.24
		661	1880.0	28.14	651.63
		810	1909.8	28.48	704.69

WCDMA

Band	Mode	Channel	f [MHz]	ERP / EIRP	
				[dBm]	[mW]
Band 5	REL99	4132	826.4	18.17	65.61
		4183	836.6	19.32	85.51
		4233	846.6	19.13	81.85
	HSDPA	4132	826.4	17.24	52.97
		4183	836.6	17.93	62.09
		4233	846.6	18.02	63.39
Band 2	REL99	9262	1852.4	22.42	174.58
		9400	1880.0	24.10	257.04
		9538	1907.6	24.21	263.63
	HSDPA	9262	1852.4	22.03	159.59
		9400	1880.0	23.23	210.38
		9538	1907.6	22.93	196.34

LTE Band 5

Band	BW [MHz]	Mode	RB/RB Size	f [MHz]	ERP / EIRP	
			Full RB		[dBm]	[mW]
Band 5	10	QPSK	50/0	829.0	18.00	63.10
			50/0	836.5	18.13	65.01
			50/0	844.0	17.78	59.98
		16QAM	50/0	829.0	16.95	49.55
			50/0	836.5	17.10	51.29
			50/0	844.0	16.72	46.99
		64QAM	50/0	829.0	16.30	42.66
			50/0	836.5	16.50	44.67
			50/0	844.0	15.71	37.24
	5	QPSK	25/0	826.5	17.11	51.40
			25/0	836.5	17.59	57.41
			25/0	846.5	16.55	45.19
		16QAM	25/0	826.5	15.84	38.37
			25/0	836.5	16.59	45.60
			25/0	846.5	16.07	40.46
		64QAM	25/0	826.5	14.69	29.44
			25/0	836.5	15.32	34.04
			25/0	846.5	13.89	24.49
	3	QPSK	15/0	825.5	18.53	71.29
			15/0	836.5	18.76	75.16
			15/0	847.5	17.63	57.94
		16QAM	15/0	825.5	17.50	56.23
			15/0	836.5	17.83	60.67
			15/0	847.5	17.11	51.40
		64QAM	15/0	825.5	15.97	39.54
			15/0	836.5	16.07	40.46
			15/0	847.5	14.38	27.42
	1.4	QPSK	6/0	824.7	16.18	41.50
			6/0	836.5	16.10	40.74
			6/0	848.3	14.97	31.41
		16QAM	6/0	824.7	15.28	33.73
			6/0	836.5	15.08	32.21
			6/0	848.3	14.52	28.31
		64QAM	6/0	824.7	12.72	18.71
			6/0	836.5	12.62	18.28
			6/0	848.3	12.82	19.14

LTE Band 4

Band	BW [MHz]	Mode	RB/RB Size	f [MHz]	ERP / EIRP	
			Full RB		[dBm]	[mW]
Band 4	20	QPSK	100/0	1720.0	21.81	151.71
			100/0	1732.5	21.76	149.97
			100/0	1745.0	21.98	157.76
		16QAM	100/0	1720.0	20.82	120.78
			100/0	1732.5	20.75	118.85
			100/0	1745.0	21.03	126.77
		64QAM	100/0	1720.0	19.30	85.11
			100/0	1732.5	19.70	93.33
			100/0	1745.0	19.81	95.72
	15	QPSK	75/0	1717.5	21.91	155.24
			75/0	1732.5	21.26	133.66
			75/0	1747.5	17.44	55.46
		16QAM	75/0	1717.5	20.92	123.59
			75/0	1732.5	20.55	113.50
			75/0	1747.5	22.10	162.18
		64QAM	75/0	1717.5	20.37	108.89
			75/0	1732.5	19.83	96.16
			75/0	1747.5	20.65	116.14
	10	QPSK	50/0	1715.0	21.68	147.23
			50/0	1732.5	21.61	144.88
			50/0	1750.0	22.10	162.18
		16QAM	50/0	1715.0	20.67	116.68
			50/0	1732.5	20.63	115.61
			50/0	1750.0	21.11	129.12
		64QAM	50/0	1715.0	19.87	97.05
			50/0	1732.5	19.26	84.33
			50/0	1750.0	20.58	114.29

LTE Band 4

Band	BW [MHz]	Mode	RB/RB Size	f [MHz]	ERP / EIRP	
			Full RB		[dBm]	[mW]
Band 4	5	QPSK	25/0	1712.5	21.52	141.91
			25/0	1732.5	21.37	137.09
			25/0	1752.5	22.39	173.38
		16QAM	25/0	1712.5	20.58	114.29
			25/0	1732.5	20.43	110.41
			25/0	1752.5	21.45	139.64
		64QAM	25/0	1712.5	19.45	88.10
			25/0	1732.5	19.08	80.91
			25/0	1752.5	20.69	117.22
	3	QPSK	15/0	1711.5	21.51	141.58
			15/0	1732.5	21.72	148.59
			15/0	1753.5	22.48	177.01
		16QAM	15/0	1711.5	20.56	113.76
			15/0	1732.5	20.76	119.12
			15/0	1753.5	21.45	139.64
		64QAM	15/0	1711.5	19.55	90.16
			15/0	1732.5	19.34	85.90
			15/0	1753.5	20.50	112.20
	1.4	QPSK	6/0	1710.7	19.20	83.18
			6/0	1732.5	18.92	77.98
			6/0	1754.3	20.21	104.95
		16QAM	6/0	1710.7	18.28	67.30
			6/0	1732.5	17.92	61.94
			6/0	1754.3	19.20	83.18
		64QAM	6/0	1710.7	16.61	45.81
			6/0	1732.5	17.28	53.46
			6/0	1754.3	18.00	63.10

LTE Band 41

Band	BW [MHz]	Mode	RB/RB Size	f [MHz]	ERP / EIRP	
			Full RB		[dBm]	[mW]
Band 41	20	QPSK	100/0	2506.0	19.71	93.54
			100/0	2593.0	22.46	176.20
			100/0	2680.0	20.84	121.34
		16QAM	100/0	2506.0	18.73	74.64
			100/0	2593.0	21.56	143.22
			100/0	2680.0	21.87	153.82
		64QAM	100/0	2506.0	19.34	85.90
			100/0	2593.0	20.42	110.15
			100/0	2680.0	20.48	111.69
	15	QPSK	75/0	2503.5	22.14	163.68
			75/0	2593.0	22.64	183.65
			75/0	2682.5	21.89	154.53
		16QAM	75/0	2503.5	21.17	130.92
			75/0	2593.0	21.80	151.36
			75/0	2682.5	20.91	123.31
		64QAM	75/0	2503.5	19.19	82.99
			75/0	2593.0	22.00	158.49
			75/0	2682.5	20.49	111.94
	10	QPSK	50/0	2501.0	20.53	112.98
			50/0	2593.0	22.23	167.11
			50/0	2685.0	22.75	188.36
		16QAM	50/0	2501.0	19.66	92.47
			50/0	2593.0	21.37	137.09
			50/0	2685.0	21.92	155.60
		64QAM	50/0	2501.0	19.96	99.08
			50/0	2593.0	21.20	131.83
			50/0	2685.0	20.38	109.14
	5	QPSK	25/0	2498.5	21.42	138.68
			25/0	2593.0	23.17	207.49
			25/0	2687.5	22.99	199.07
		16QAM	25/0	2498.5	20.44	110.66
			25/0	2593.0	21.63	145.55
			25/0	2687.5	21.58	143.88
		64QAM	25/0	2498.5	19.58	90.78
			25/0	2593.0	21.30	134.90
			25/0	2687.5	20.79	119.95

10.1.2. ERP/EIRP DATA

GSM 1900

GSM GSM1900 GPRS	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 10-11-17 Test Engineer: JH Park Configuration: EUT ONLY, XPosition Mode: GPRS 1900MHz Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	1850.20	18.7	V	1.60	8.80	25.93	33.0	-7.1	
	1850.20	22.9	H	1.60	8.80	30.06	33.0	-2.9	
	Mid Ch								
	1880.00	20.8	V	1.62	8.62	27.82	33.0	-5.2	
	1880.00	24.3	H	1.62	8.62	31.30	33.0	-1.7	
	High Ch								
	1909.80	20.4	V	1.63	8.44	27.21	33.0	-5.8	
	1909.80	24.1	H	1.63	8.44	30.90	33.0	-2.1	
	Rev. 3.17.11								

GSM GSM1900 EGPRS	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 10-13-17 Test Engineer: YH Lim Configuration: EUT ONLY, XPosition Mode: EGPRS 1900MHz Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	1850.20	15.8	V	1.60	8.80	23.00	33.0	-10.0	
	1850.20	19.6	H	1.60	8.80	26.76	33.0	-6.2	
	Mid Ch								
	1880.00	18.3	V	1.62	8.62	25.26	33.0	-7.7	
	1880.00	21.1	H	1.62	8.62	28.14	33.0	-4.9	
	High Ch								
	1909.80	20.1	V	1.63	8.44	26.91	33.0	-6.1	
	1909.80	21.7	H	1.63	8.44	28.48	33.0	-4.5	
	Rev. 3.17.11								

BC0

BC0 1xRTT	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 10-24-17 Test Engineer: YH Lim Configuration: EUT ONLY, Y Position Mode: CDMA RTT BC0								
	Test Equipment: Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)	
	Low Ch								
	824.70	22.92	V	1.1	-1.6	20.30	38.5	-18.2	
	824.70	15.04	H	1.1	-1.6	12.42	38.5	-26.0	
	Mid Ch								
	836.52	23.68	V	1.1	-1.4	21.19	38.5	-17.3	
	836.52	12.92	H	1.1	-1.4	10.43	38.5	-28.0	
	High Ch								
	848.31	21.34	V	1.1	-1.3	18.98	38.5	-19.5	
	848.31	11.29	H	1.1	-1.3	8.93	38.5	-29.5	
	Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm								
BC0 EVDO Rel.0	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 10-24-17 Test Engineer: YH Lim Configuration: EUT ONLY, Y Position Mode: CDMA EVDO BC0								
	Test Equipment: Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)	
	Low Ch								
	824.70	21.26	V	1.1	-1.6	18.64	38.5	-19.8	
	824.70	11.79	H	1.1	-1.6	9.17	38.5	-29.3	
	Mid Ch								
	836.52	23.64	V	1.1	-1.4	21.15	38.5	-17.3	
	836.52	13.87	H	1.1	-1.4	11.38	38.5	-27.1	
	High Ch								
	848.31	19.52	V	1.1	-1.3	17.16	38.5	-21.3	
	848.31	10.89	H	1.1	-1.3	8.53	38.5	-29.9	
	Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm								

WCDMA Band 5

WCDMA Band 5 REL99		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2							
		Company: Samsung Project #: 4788164548 Date: 09-27-17 Test Engineer: YH Lim Configuration: EUT ONLY, Y Position Mode: Rel 99_850 MHz							
		Test Equipment: Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.							
		f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Notes
		MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)
		Low Ch							
		826.40	20.78	V	1.1	-1.5	18.17	38.5	-20.3
		826.40	11.56	H	1.1	-1.5	8.95	38.5	-29.5
		Mid Ch							
		836.60	21.81	V	1.1	-1.4	19.32	38.5	-19.1
		836.60	11.05	H	1.1	-1.4	8.56	38.5	-29.9
		High Ch							
		846.60	21.51	V	1.1	-1.3	19.13	38.5	-19.3
		846.60	12.49	H	1.1	-1.3	10.11	38.5	-28.3
		Rev. 3.17.11							
WCDMA Band 5 HSDPA		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2							
		Company: Samsung Project #: 4788164548 Date: 09-27-17 Test Engineer: YH Lim Configuration: EUT ONLY, Y Position Mode: HSDPA_850 MHz							
		Test Equipment: Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.							
		f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Notes
		MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)
		Low Ch							
		826.40	19.85	V	1.1	-1.5	17.24	38.5	-21.2
		826.40	11.93	H	1.1	-1.5	9.32	38.5	-29.1
		Mid Ch							
		836.60	20.42	V	1.1	-1.4	17.93	38.5	-20.5
		836.60	11.39	H	1.1	-1.4	8.90	38.5	-29.6
		High Ch							
		846.60	20.40	V	1.1	-1.3	18.02	38.5	-20.4
		846.60	11.44	H	1.1	-1.3	9.06	38.5	-29.4
		Rev. 3.17.11							

WCDMA Band 2

WCDMA Band 2 REL99	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 10-13-17 Test Engineer: YH Lim Configuration: EUT ONLY, X Position Mode: REL99_1900 MHz								
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Ware house								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	1852.40	12.93	V	1.60	8.79	20.12	33.0	-12.9	
	1852.40	15.23	H	1.60	8.79	22.42	33.0	-10.6	
	Mid Ch								
	1880.00	14.20	V	1.62	8.62	21.20	33.0	-11.8	
	1880.00	17.10	H	1.62	8.62	24.10	33.0	-8.9	
	High Ch								
	1907.60	13.81	V	1.63	8.45	20.63	33.0	-12.4	
	1907.60	17.39	H	1.63	8.45	24.21	33.0	-8.8	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								
WCDMA Band 2 HSDPA	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 10-13-17 Test Engineer: YH Lim Configuration: EUT ONLY, X Position Mode: HSDPA_1900 MHz								
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	1852.40	11.97	V	1.60	8.79	19.16	33.0	-13.8	
	1852.40	14.84	H	1.60	8.79	22.03	33.0	-11.0	
	Mid Ch								
	1880.00	13.39	V	1.62	8.62	20.39	33.0	-12.6	
	1880.00	16.23	H	1.62	8.62	23.23	33.0	-9.8	
	High Ch								
	1907.60	12.86	V	1.63	8.45	19.68	33.0	-13.3	
	1907.60	16.11	H	1.63	8.45	22.93	33.0	-10.1	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

LTE Band 5

LTE Band 5 10MHz QPSK	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 10-12-17 Test Engineer: YH Lim Configuration: EUT ONLY, Y Position Mode: TX, LTE BAND 5, 10MHz BW,QPSK								
	Test Equipment: Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)	
	Low Ch								
	829.00	20.58	V	1.1	-1.5	18.00	38.5	-20.5	
	829.00	9.10	H	1.1	-1.5	6.52	38.5	-31.9	
	Mid Ch								
	836.50	20.62	V	1.1	-1.4	18.13	38.5	-20.3	
	836.50	11.92	H	1.1	-1.4	9.43	38.5	-29.0	
	High Ch								
	844.00	20.17	V	1.1	-1.3	17.78	38.5	-20.7	
	844.00	11.75	H	1.1	-1.3	9.33	38.5	-29.1	
	Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm								
LTE Band 5 10MHz 16QAM	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 10-12-17 Test Engineer: YH Lim Configuration: EUT ONLY, Y Position Mode: LTE5 10MHz FUND 16QAM								
	Test Equipment: Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)	
	Low Ch								
	829.00	19.53	V	1.1	-1.5	16.95	38.5	-21.5	
	829.00	10.13	H	1.1	-1.5	7.55	38.5	-30.9	
	Mid Ch								
	836.50	19.61	V	1.1	-1.4	17.10	38.5	-21.3	
	836.50	10.93	H	1.1	-1.4	8.42	38.5	-30.0	
	High Ch								
	844.00	19.14	V	1.1	-1.3	16.72	38.5	-21.7	
	844.00	10.72	H	1.1	-1.3	8.30	38.5	-30.1	
	Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm								

LTE Band 5 5MHz QPSK	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 10-12-17 Test Engineer: YH Lim Configuration: EUT ONLY, Y Position Mode: LTE5 5MHz FUND QPSK								
	Test Equipment: Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)	
	Low Ch								
	826.50	19.71	V	1.1	-1.5	17.11	38.5	-21.3	
	826.50	10.03	H	1.1	-1.5	7.43	38.5	-31.0	
	Mid Ch								
	836.50	20.08	V	1.1	-1.4	17.59	38.5	-20.9	
LTE Band 5 5MHz 16QAM	836.50	10.95	H	1.1	-1.4	8.46	38.5	-30.0	
	High Ch								
	846.50	19.43	V	1.6	-1.3	16.55	38.5	-21.9	
	846.50	11.33	H	1.6	-1.3	8.45	38.5	-30.0	
	Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm								
	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 10-12-17 Test Engineer: YH Lim Configuration: EUT ONLY, Y Position Mode: LTE5 5MHz FUND 16QAM								
	Test Equipment: Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)	
	Low Ch								
	826.50	18.44	V	1.1	-1.5	15.84	38.5	-22.6	
	826.50	8.73	H	1.1	-1.5	6.13	38.5	-32.3	
	Mid Ch								
	836.50	19.08	V	1.1	-1.4	16.59	38.5	-21.9	
	836.50	9.87	H	1.1	-1.4	7.38	38.5	-31.1	
	High Ch								
	846.50	18.45	V	1.1	-1.3	16.07	38.5	-22.4	
	846.50	10.32	H	1.1	-1.3	7.94	38.5	-30.5	
	Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm								

LTE Band 5 3MHz QPSK	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 09-27-17 Test Engineer: YH Lim Configuration: EUT ONLY, Y Position Mode: LTE5 3MHz FUND QPSK								
	Test Equipment: Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)	
	Low Ch								
	825.50	21.13	V	1.1	-1.5	18.53	38.5	-19.9	
	825.50	11.54	H	1.1	-1.5	8.94	38.5	-29.5	
	Mid Ch								
	836.50	21.25	V	1.1	-1.4	18.76	38.5	-19.7	
	836.50	11.78	H	1.1	-1.4	9.29	38.5	-29.2	
	High Ch								
	847.50	20.51	V	1.6	-1.3	17.63	38.5	-20.8	
	847.50	11.64	H	1.6	-1.3	8.76	38.5	-29.7	
	Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm								
LTE Band 5 3MHz 16QAM	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 09-27-17 Test Engineer: YH Lim Configuration: EUT ONLY, Y Position Mode: LTE5 3MHz FUND 16QAM								
	Test Equipment: Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)	
	Low Ch								
	825.50	20.10	V	1.1	-1.5	17.50	38.5	-21.0	
	825.50	10.59	H	1.1	-1.5	7.99	38.5	-30.5	
	Mid Ch								
	836.50	20.32	V	1.1	-1.4	17.83	38.5	-20.6	
	836.50	10.74	H	1.1	-1.4	8.25	38.5	-30.2	
	High Ch								
	847.50	19.49	V	1.1	-1.3	17.11	38.5	-21.3	
	847.50	11.64	H	1.1	-1.3	9.26	38.5	-29.2	
	Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm								

LTE Band 5 1.4MHz QPSK	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 09-27-17 Test Engineer: YH Lim Configuration: EUT ONLY, Y Position Mode: LTE5 1.4MHz FUND QPSK								
	Test Equipment: Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)	
	Low Ch								
	824.70	18.78	V	1.1	-1.5	16.18	38.5	-22.3	
	824.70	8.32	H	1.1	-1.5	5.72	38.5	-32.7	
	Mid Ch								
	836.50	18.59	V	1.1	-1.4	16.10	38.5	-22.4	
LTE Band 5 1.4MHz 16QAM	836.50	8.56	H	1.1	-1.4	6.07	38.5	-32.4	
	High Ch								
	848.30	17.85	V	1.6	-1.3	14.97	38.5	-23.5	
	848.30	8.55	H	1.6	-1.3	5.67	38.5	-32.8	
	Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm								
	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 09-27-17 Test Engineer: YH Lim Configuration: EUT ONLY, Y Position Mode: LTE5 1.4MHz FUND 16QAM								
	Test Equipment: Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)	
	Low Ch								
	824.70	17.88	V	1.1	-1.5	15.28	38.5	-23.2	
	824.70	7.40	H	1.1	-1.5	4.80	38.5	-33.7	
	Mid Ch								
	836.50	17.57	V	1.1	-1.4	15.08	38.5	-23.4	
	836.50	7.56	H	1.1	-1.4	5.07	38.5	-33.4	
	High Ch								
	848.30	16.90	V	1.1	-1.3	14.52	38.5	-23.9	
	848.30	7.54	H	1.1	-1.3	5.16	38.5	-33.3	
	Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm								

LTE Band 5 10MHz 64QAM	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 10-19-17 Test Engineer: YH Lim Configuration: EUT ONLY, Y Position Mode: LTE5 10MHz FUND 64QAM								
	Test Equipment: Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)	
	Low Ch								
	829.00	18.88	V	1.1	-1.5	16.30	38.5	-22.2	
	829.00	9.74	H	1.1	-1.5	7.16	38.5	-31.3	
	Mid Ch								
	836.50	19.01	V	1.1	-1.4	16.50	38.5	-21.9	
	836.50	10.36	H	1.1	-1.4	7.85	38.5	-30.6	
	High Ch								
	844.00	18.13	V	1.1	-1.3	15.71	38.5	-22.7	
	844.00	10.33	H	1.1	-1.3	7.91	38.5	-30.5	
	Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm								
LTE Band 5 5MHz 64QAM	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 10-19-17 Test Engineer: YH Lim Configuration: EUT ONLY, Y Position Mode: LTE5 5MHz FUND 64QAM								
	Test Equipment: Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)	
	Low Ch								
	826.50	17.29	V	1.1	-1.5	14.69	38.5	-23.8	
	826.50	8.37	H	1.1	-1.5	5.77	38.5	-32.7	
	Mid Ch								
	836.50	17.81	V	1.1	-1.4	15.32	38.5	-23.1	
	836.50	8.55	H	1.1	-1.4	6.06	38.5	-32.4	
	High Ch								
	846.50	16.27	V	1.1	-1.3	13.89	38.5	-24.6	
	846.50	8.68	H	1.1	-1.3	6.30	38.5	-32.2	
	Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm								

LTE Band 5 3 MHz 64QAM	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company:		Samsung						
	Project #:		4788164548						
	Date:		10-19-17						
	Test Engineer:		YH Lim						
	Configuration:		EUT ONLY, Y Position						
	Mode:		LTE5 3MHz FUND 64QAM						
	Test Equipment:								
	Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT)								
	Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	825.50	18.57	V	1.1	-1.5	15.97	38.5	-22.5	
	825.50	8.44	H	1.1	-1.5	5.84	38.5	-32.6	
	Mid Ch								
836.50	18.56	V	1.1	-1.4	16.07	38.5	-22.4		
836.50	9.20	H	1.1	-1.4	6.71	38.5	-31.7		
High Ch									
847.50	16.76	V	1.1	-1.3	14.38	38.5	-24.1		
847.50	6.66	H	1.1	-1.3	4.28	38.5	-34.2		
Rev. 3.17.11									
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm									

LTE Band 5 1.4MHz 64QAM	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company:		Samsung						
	Project #:		4788164548						
	Date:		10-19-17						
	Test Engineer:		YH Lim						
	Configuration:		EUT ONLY, Y Position						
	Mode:		LTE5 1.4MHz FUND 64QAM						
	Test Equipment:								
	Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT)								
	Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	824.70	15.32	V	1.1	-1.5	12.72	38.5	-25.7	
	824.70	7.60	H	1.1	-1.5	5.00	38.5	-33.5	
	Mid Ch								
836.50	15.11	V	1.1	-1.4	12.62	38.5	-25.8		
836.50	8.02	H	1.1	-1.4	5.53	38.5	-32.9		
High Ch									
848.30	15.20	V	1.1	-1.3	12.82	38.5	-25.6		
848.30	7.54	H	1.1	-1.3	5.16	38.5	-33.3		
Rev. 3.17.11									
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm									

LTE Band 4

LTE Band 4 20MHz QPSK	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 11-02-17 Test Engineer: YH Lim Configuration: EUT / X-Position Mode: LTE Band 4, QPSK, 20MHz								
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	1720.00	9.18	V	1.54	9.12	16.76	30.0	-13.2	
	1720.00	14.23	H	1.54	9.12	21.81	30.0	-8.2	
	Mid Ch								
	1732.50	9.00	V	1.55	9.31	16.76	30.0	-13.2	
	1732.50	14.00	H	1.55	9.31	21.76	30.0	-8.2	
	High Ch								
	1745.00	9.59	V	1.56	9.37	17.40	30.0	-12.6	
	1745.00	14.17	H	1.56	9.37	21.98	30.0	-8.0	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								
LTE Band 4 20MHz 16QAM	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 11-02-17 Test Engineer: YH Lim Configuration: EUT / X-Position Mode: LTE Band 4, 16QAM, 20MHz								
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	1720.00	8.17	V	1.54	9.12	15.75	30.0	-14.3	
	1720.00	13.24	H	1.54	9.12	20.82	30.0	-9.2	
	Mid Ch								
	1732.50	8.00	V	1.55	9.31	15.76	30.0	-14.2	
	1732.50	12.99	H	1.55	9.31	20.75	30.0	-9.3	
	High Ch								
	1745.00	8.59	V	1.56	9.37	16.40	30.0	-13.6	
	1745.00	13.22	H	1.56	9.37	21.03	30.0	-9.0	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

LTE Band 4 15MHz QPSK	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2 Company: Samsung Project #: 4788164548 Date: 11-02-17 Test Engineer: YH Lim Configuration: EUT / X-Position Mode: LTE Band 4, QPSK, 15MHz Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	1717.50	7.92	V	1.54	9.12	15.50	30.0	-14.5	
	1717.50	14.33	H	1.54	9.12	21.91	30.0	-8.1	
	Mid Ch								
	1732.50	8.17	V	1.55	9.31	15.93	30.0	-14.1	
	1732.50	13.50	H	1.55	9.31	21.26	30.0	-8.7	
	High Ch								
	1747.50	9.05	V	1.56	9.39	16.88	30.0	-13.1	
	1747.50	9.61	H	1.56	9.39	17.44	30.0	-12.6	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								
LTE Band 4 15MHz 16QAM	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2 Company: Samsung Project #: 4788164548 Date: 11-02-17 Test Engineer: YH Lim Configuration: EUT / X-Position Mode: LTE Band 4, 16QAM, 15MHz Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	1717.50	6.65	V	1.54	9.12	14.23	30.0	-15.8	
	1717.50	13.34	H	1.54	9.12	20.92	30.0	-9.1	
	Mid Ch								
	1732.50	7.46	V	1.55	9.31	15.22	30.0	-14.8	
	1732.50	12.79	H	1.55	9.31	20.55	30.0	-9.5	
	High Ch								
	1747.50	8.20	V	1.56	9.39	16.03	30.0	-14.0	
	1747.50	14.27	H	1.56	9.39	22.10	30.0	-7.9	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

LTE Band 4 10MHz QPSK	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 11-02-17 Test Engineer: YH Lim Configuration: EUT / X-Position Mode: LTE Band 4, QPSK, 10MHz								
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	1715.00	7.61	V	1.54	9.12	15.19	30.0	-14.8	
	1715.00	14.10	H	1.54	9.12	21.68	30.0	-8.3	
	Mid Ch								
	1732.50	8.42	V	1.55	9.31	16.18	30.0	-13.8	
	1732.50	13.85	H	1.55	9.31	21.61	30.0	-8.4	
	High Ch								
	1750.00	10.17	V	1.56	9.40	18.01	30.0	-12.0	
	1750.00	14.26	H	1.56	9.40	22.10	30.0	-7.9	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								
LTE Band 4 10MHz 16QAM	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 11-02-17 Test Engineer: YH Lim Configuration: EUT / X-Position Mode: LTE Band 4 16QAM, 10MHz								
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	1715.00	6.61	V	1.54	9.12	14.19	30.0	-15.8	
	1715.00	13.09	H	1.54	9.12	20.67	30.0	-9.3	
	Mid Ch								
	1732.50	7.56	V	1.55	9.31	15.32	30.0	-14.7	
	1732.50	12.87	H	1.55	9.31	20.63	30.0	-9.4	
	High Ch								
	1750.00	9.15	V	1.56	9.40	16.99	30.0	-13.0	
	1750.00	13.27	H	1.56	9.40	21.11	30.0	-8.9	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

LTE Band 4 5MHz QPSK	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 11-02-17 Test Engineer: YH Lim Configuration: EUT / X-Position Mode: LTE Band 4, QPSK , 5MHz								
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	1712.50	7.71	V	1.54	9.12	15.29	30.0	-14.7	
	1712.50	13.94	H	1.54	9.12	21.52	30.0	-8.5	
	Mid Ch								
	1732.50	8.06	V	1.55	9.31	15.82	30.0	-14.2	
	1732.50	13.61	H	1.55	9.31	21.37	30.0	-8.6	
	High Ch								
	1752.50	10.27	V	1.56	9.39	18.10	30.0	-11.9	
	1752.50	14.56	H	1.56	9.39	22.39	30.0	-7.6	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								
LTE Band 4 5MHz 16QAM	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 11-02-17 Test Engineer: YH Lim Configuration: EUT / X-Position Mode: LTE Band 4 16QAM, 5MHz								
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	1712.50	6.80	V	1.54	9.12	14.38	30.0	-15.6	
	1712.50	13.00	H	1.54	9.12	20.58	30.0	-9.4	
	Mid Ch								
	1732.50	7.08	V	1.55	9.31	14.84	30.0	-15.2	
	1732.50	12.67	H	1.55	9.31	20.43	30.0	-9.6	
	High Ch								
	1752.50	9.30	V	1.56	9.39	17.13	30.0	-12.9	
	1752.50	13.62	H	1.56	9.39	21.45	30.0	-8.6	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

LTE Band 4 3MHz QPSK	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 11-02-17 Test Engineer: YH Lim Configuration: EUT / X-Position Mode: LTE Band 4, QPSK , 3MHz								
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	1711.50	6.24	V	1.54	9.12	13.82	30.0	-16.2	
	1711.50	13.93	H	1.54	9.12	21.51	30.0	-8.5	
	Mid Ch								
	1732.50	7.14	V	1.55	9.31	14.90	30.0	-15.1	
	1732.50	13.96	H	1.55	9.31	21.72	30.0	-8.3	
	High Ch								
	1753.50	8.48	V	1.56	9.38	16.30	30.0	-13.7	
	1753.50	14.66	H	1.56	9.38	22.48	30.0	-7.5	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								
LTE Band 4 3MHz 16QAM	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 11-02-17 Test Engineer: YH Lim Configuration: EUT / X-Position Mode: LTE Band 4 16QAM, 3MHz								
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	1711.50	5.20	V	1.54	9.12	12.78	30.0	-17.2	
	1711.50	12.98	H	1.54	9.12	20.56	30.0	-9.4	
	Mid Ch								
	1732.50	6.19	V	1.55	9.31	13.95	30.0	-16.1	
	1732.50	13.00	H	1.55	9.31	20.76	30.0	-9.2	
	High Ch								
	1753.50	7.54	V	1.56	9.38	15.36	30.0	-14.6	
	1753.50	13.63	H	1.56	9.38	21.45	30.0	-8.6	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

LTE Band 4 1.4MHz QPSK	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 11-02-17 Test Engineer: YH Lim Configuration: EUT / X-Position Mode: LTE Band 4 QPSK, 1.4MHz								
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	1710.70	5.54	V	1.54	9.12	13.12	30.0	-16.9	
	1710.70	11.62	H	1.54	9.12	19.20	30.0	-10.8	
	Mid Ch								
	1732.50	5.56	V	1.55	9.31	13.32	30.0	-16.7	
	1732.50	11.16	H	1.55	9.31	18.92	30.0	-11.1	
	High Ch								
	1754.30	8.06	V	1.56	9.37	15.87	30.0	-14.1	
	1754.30	12.40	H	1.56	9.37	20.21	30.0	-9.8	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								
LTE Band 4 1.4MHz 16QAM	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 11-02-17 Test Engineer: YH Lim Configuration: EUT / X-Position Mode: LTE Band 4 16QAM, 1.4MHz								
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	1710.70	4.53	V	1.54	9.12	12.11	30.0	-17.9	
	1710.70	10.70	H	1.54	9.12	18.28	30.0	-11.7	
	Mid Ch								
	1732.50	4.63	V	1.55	9.31	12.39	30.0	-17.6	
	1732.50	10.16	H	1.55	9.31	17.92	30.0	-12.1	
	High Ch								
	1754.30	7.00	V	1.56	9.37	14.81	30.0	-15.2	
	1754.30	11.39	H	1.56	9.37	19.20	30.0	-10.8	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

LTE Band 4 20MHz 64QAM	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 10-19-17 Test Engineer: YH Lim Configuration: EUT / X-Position Mode: LTE Band 4, 64QAM, 20MHz								
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	1720.00	6.49	V	1.54	9.12	14.07	30.0	-15.9	
	1720.00	11.72	H	1.54	9.12	19.30	30.0	-10.7	
	Mid Ch								
	1732.50	6.62	V	1.55	9.31	14.38	30.0	-15.6	
	1732.50	11.94	H	1.55	9.31	19.70	30.0	-10.3	
	High Ch								
	1745.00	7.44	V	1.56	9.37	15.25	30.0	-14.8	
	1745.00	12.00	H	1.56	9.37	19.81	30.0	-10.2	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								
LTE Band 4 15MHz 64QAM	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 10-18-17 Test Engineer: JH Park Configuration: EUT / X-Position Mode: LTE Band 4, 64QAM, 15MHz								
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	1717.50	5.57	V	1.54	9.12	13.15	30.0	-16.9	
	1717.50	12.79	H	1.54	9.12	20.37	30.0	-9.6	
	Mid Ch								
	1732.50	5.72	V	1.55	9.31	13.48	30.0	-16.5	
	1732.50	12.07	H	1.55	9.31	19.83	30.0	-10.2	
	High Ch								
	1747.50	7.35	V	1.56	9.39	15.18	30.0	-14.8	
	1747.50	12.82	H	1.56	9.39	20.65	30.0	-9.3	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

LTE Band 4 10MHz 64QAM	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 10-18-17 Test Engineer: JH Park Configuration: EUT / X-Position Mode: LTE Band 4 64QAM, 10MHz								
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	1715.00	5.71	V	1.54	9.12	13.29	30.0	-16.7	
	1715.00	12.29	H	1.54	9.12	19.87	30.0	-10.1	
	Mid Ch								
	1732.50	6.89	V	1.55	9.31	14.65	30.0	-15.4	
	1732.50	11.50	H	1.55	9.31	19.26	30.0	-10.7	
	High Ch								
	1750.00	8.08	V	1.56	9.40	15.92	30.0	-14.1	
	1750.00	12.74	H	1.56	9.40	20.58	30.0	-9.4	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								
LTE Band 4 5MHz 64QAM	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 10-18-17 Test Engineer: JH Park Configuration: EUT / X-Position Mode: LTE Band 4 64QAM, 5MHz								
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	1712.50	6.25	V	1.54	9.12	13.83	30.0	-16.2	
	1712.50	11.87	H	1.54	9.12	19.45	30.0	-10.6	
	Mid Ch								
	1732.50	6.19	V	1.55	9.31	13.95	30.0	-16.1	
	1732.50	11.32	H	1.55	9.31	19.08	30.0	-10.9	
	High Ch								
	1752.50	8.77	V	1.56	9.39	16.60	30.0	-13.4	
	1752.50	12.86	H	1.56	9.39	20.69	30.0	-9.3	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

LTE Band 4 3MHz 64QAM	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 10-18-17 Test Engineer: JH Park Configuration: EUT / X-Position Mode: LTE Band 4 64QAM, 3MHz								
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	1711.50	3.93	V	1.54	9.12	11.51	30.0	-18.5	
	1711.50	11.97	H	1.54	9.12	19.55	30.0	-10.5	
	Mid Ch								
	1732.50	4.96	V	1.55	9.31	12.72	30.0	-17.3	
	1732.50	11.58	H	1.55	9.31	19.34	30.0	-10.7	
	High Ch								
	1753.50	4.63	V	1.56	9.38	12.45	30.0	-17.6	
	1753.50	12.68	H	1.56	9.38	20.50	30.0	-9.5	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								
LTE Band 4 1.4MHz 64QAM	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 10-18-17 Test Engineer: JH Park Configuration: EUT / X-Position Mode: LTE Band 4 64QAM, 1.4MHz								
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	1710.70	3.12	V	1.54	9.12	10.70	30.0	-19.3	
	1710.70	9.03	H	1.54	9.12	16.61	30.0	-13.4	
	Mid Ch								
	1732.50	3.31	V	1.55	9.31	11.07	30.0	-18.9	
	1732.50	9.52	H	1.55	9.31	17.28	30.0	-12.7	
	High Ch								
	1754.30	4.54	V	1.56	9.37	12.35	30.0	-17.7	
	1754.30	10.19	H	1.56	9.37	18.00	30.0	-12.0	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

LTE Band 41

LTE Band 41 20MHz QPSK	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 09-28-17 Test Engineer: YH Lim Configuration: EUT / X-Position Mode: LTE Band 41, QPSK, 20MHz								
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	2506.00	9.14	V	1.9	9.1	16.40	33.0	-16.6	
	2506.00	12.45	H	1.9	9.1	19.71	33.0	-13.3	
	Mid Ch								
	2593.00	8.72	V	1.9	10.4	17.21	33.0	-15.8	
	2593.00	13.97	H	1.9	10.4	22.46	33.0	-10.5	
	High Ch								
	2680.00	8.99	V	1.9	10.3	17.43	33.0	-15.6	
	2680.00	12.40	H	1.9	10.3	20.84	33.0	-12.2	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								
LTE Band 41 20MHz 16QAM	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 09-28-17 Test Engineer: YH Lim Configuration: EUT / X-Position Mode: LTE Band 41, 16QAM, 20MHz								
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	2506.00	8.50	V	1.9	9.1	15.76	33.0	-17.2	
	2506.00	11.47	H	1.9	9.1	18.73	33.0	-14.3	
	Mid Ch								
	2593.00	7.79	V	1.9	10.4	16.28	33.0	-16.7	
	2593.00	13.07	H	1.9	10.4	21.56	33.0	-11.4	
	High Ch								
	2680.00	8.01	V	1.9	10.3	16.45	33.0	-16.5	
	2680.00	13.43	H	1.9	10.3	21.87	33.0	-11.1	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

LTE Band 41 15MHz QPSK	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 09-28-17 Test Engineer: YH Lim Configuration: EUT / X-Position Mode: LTE Band 41, QPSK, 15MHz								
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	2503.50	9.32	V	1.9	9.1	16.58	33.0	-16.4	
	2503.50	14.88	H	1.9	9.1	22.14	33.0	-10.9	
	Mid Ch								
	2593.00	12.73	V	1.9	10.4	21.22	33.0	-11.8	
	2593.00	14.15	H	1.9	10.4	22.64	33.0	-10.4	
	High Ch								
	2682.50	12.90	V	1.9	10.3	21.34	33.0	-11.7	
	2682.50	13.45	H	1.9	10.3	21.89	33.0	-11.1	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								
LTE Band 41 15MHz 16QAM	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 09-28-17 Test Engineer: YH Lim Configuration: EUT / X-Position Mode: LTE Band 41, 16QAM, 15MHz								
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	2503.50	8.31	V	1.9	9.1	15.57	33.0	-17.4	
	2503.50	13.91	H	1.9	9.1	21.17	33.0	-11.8	
	Mid Ch								
	2593.00	11.77	V	1.9	10.4	20.26	33.0	-12.7	
	2593.00	13.31	H	1.9	10.4	21.80	33.0	-11.2	
	High Ch								
	2682.50	11.82	V	1.9	10.3	20.26	33.0	-12.7	
	2682.50	12.47	H	1.9	10.3	20.91	33.0	-12.1	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

LTE Band 41 10MHz QPSK	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 09-28-17 Test Engineer: YH Lim Configuration: EUT / X-Position Mode: LTE Band 41, QPSK, 10MHz								
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	2501.00	11.24	V	1.9	9.1	18.50	33.0	-14.5	
	2501.00	13.27	H	1.9	9.1	20.53	33.0	-12.5	
	Mid Ch								
	2593.00	12.37	V	1.9	10.4	20.86	33.0	-12.1	
	2593.00	13.74	H	1.9	10.4	22.23	33.0	-10.8	
	High Ch								
	2685.00	14.31	V	1.9	10.3	22.75	33.0	-10.2	
	2685.00	13.65	H	1.9	10.3	22.09	33.0	-10.9	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								
LTE Band 41 10MHz 16QAM	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 09-28-17 Test Engineer: YH Lim Configuration: EUT / X-Position Mode: LTE Band 41 16QAM, 10MHz								
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	2501.00	10.25	V	1.9	9.1	17.51	33.0	-15.5	
	2501.00	12.40	H	1.9	9.1	19.66	33.0	-13.3	
	Mid Ch								
	2593.00	11.48	V	1.9	10.4	19.97	33.0	-13.0	
	2593.00	12.88	H	1.9	10.4	21.37	33.0	-11.6	
	High Ch								
	2685.00	13.48	V	1.9	10.3	21.92	33.0	-11.1	
	2685.00	12.54	H	1.9	10.3	20.98	33.0	-12.0	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

LTE Band 41 5MHz QPSK	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 09-28-17 Test Engineer: YH Lim Configuration: EUT / X-Position Mode: LTE Band 41, QPSK, 5MHz								
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	2498.50	10.47	V	1.9	9.1	17.73	33.0	-15.3	
	2498.50	14.16	H	1.9	9.1	21.42	33.0	-11.6	
	Mid Ch								
	2593.00	10.53	V	1.9	10.4	19.02	33.0	-14.0	
	2593.00	14.68	H	1.9	10.4	23.17	33.0	-9.8	
	High Ch								
	2687.50	13.24	V	1.9	10.3	21.68	33.0	-11.3	
	2687.50	14.55	H	1.9	10.3	22.99	33.0	-10.0	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								
LTE Band 41 5MHz 16QAM	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 09-28-17 Test Engineer: YH Lim Configuration: EUT / X-Position Mode: LTE Band 41 16QAM, 5MHz								
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	2498.50	11.63	V	1.9	9.1	18.89	33.0	-14.1	
	2498.50	13.18	H	1.9	9.1	20.44	33.0	-12.6	
	Mid Ch								
	2593.00	8.99	V	1.9	10.4	17.48	33.0	-15.5	
	2593.00	13.14	H	1.9	10.4	21.63	33.0	-11.4	
	High Ch								
	2687.50	12.42	V	1.9	10.3	20.86	33.0	-12.1	
	2687.50	13.14	H	1.9	10.3	21.58	33.0	-11.4	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

LTE Band 41 20MHz 64QAM	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 10-18-17 Test Engineer: YH Lim Configuration: EUT / X-Position Mode: LTE Band 41, 64QAM, 20MHz								
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	2506.00	10.61	V	1.9	9.1	17.87	33.0	-15.1	
	2506.00	12.08	H	1.9	9.1	19.34	33.0	-13.7	
	Mid Ch								
	2593.00	13.32	V	1.9	10.4	21.81	33.0	-11.2	
	2593.00	11.93	H	1.9	10.4	20.42	33.0	-12.6	
	High Ch								
	2680.00	10.16	V	1.9	10.3	18.60	33.0	-14.4	
	2680.00	12.04	H	1.9	10.3	20.48	33.0	-12.5	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								
LTE Band 41 15MHz 64QAM	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 10-18-17 Test Engineer: YH Lim Configuration: EUT / X-Position Mode: LTE Band 41, 64QAM, 15MHz								
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	2503.50	10.08	V	1.9	9.1	17.34	33.0	-15.7	
	2503.50	11.93	H	1.9	9.1	19.19	33.0	-13.8	
	Mid Ch								
	2593.00	13.51	V	1.9	10.4	22.00	33.0	-11.0	
	2593.00	12.39	H	1.9	10.4	20.88	33.0	-12.1	
	High Ch								
	2682.50	10.04	V	1.9	10.3	18.48	33.0	-14.5	
	2682.50	12.05	H	1.9	10.3	20.49	33.0	-12.5	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

LTE Band 41 10MHz 64QAM	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 10-18-17 Test Engineer: YH Lim Configuration: EUT / X-Position Mode: LTE Band 41 64QAM, 10MHz								
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	2501.00	10.65	V	1.9	9.1	17.91	33.0	-15.1	
	2501.00	12.70	H	1.9	9.1	19.96	33.0	-13.0	
	Mid Ch								
	2593.00	12.53	V	1.9	10.4	21.02	33.0	-12.0	
	2593.00	12.71	H	1.9	10.4	21.20	33.0	-11.8	
	High Ch								
	2685.00	11.57	V	1.9	10.3	20.01	33.0	-13.0	
	2685.00	11.94	H	1.9	10.3	20.38	33.0	-12.6	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								
LTE Band 41 5MHz 64QAM	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
	Company: Samsung Project #: 4788164548 Date: 10-18-17 Test Engineer: YH Lim Configuration: EUT / X-Position Mode: LTE Band 41 64QAM, 5MHz								
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	2498.50	10.23	V	1.9	9.1	17.49	33.0	-15.5	
	2498.50	12.32	H	1.9	9.1	19.58	33.0	-13.4	
	Mid Ch								
	2593.00	8.58	V	1.9	10.4	17.07	33.0	-15.9	
	2593.00	12.81	H	1.9	10.4	21.30	33.0	-11.7	
	High Ch								
	2687.50	12.18	V	1.9	10.3	20.62	33.0	-12.4	
	2687.50	12.35	H	1.9	10.3	20.79	33.0	-12.2	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

10.2. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238 and §27. 53

LIMIT

Part 22.917(a) & Part 24.238(a) & Part 27.53(h) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

Part 27: (m)(4) For mobile station, the attenuation factor shall be not less than $43 + 10 \log (P)$ dB at the channel edge and $(55 + 10 \log (P))$ dB at the 5.5 MHz from the channel edges.

Part 27.53(c) (2) - On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

ANSI / TIA / EIA 603 E Clause 2.2.12; ESU40 setting reference to 971168 D01 v03

For peak power measurement with a ESU40:

- a) Set the RBW = 100 KHz for emission below 1GHz and 1MHz for emissions above 1GHz
- b) Set VBW $\geq 3 \times$ RBW;
- c) Set span ≥ 1.5 times the OBW;
- d) Sweep time = auto couple;
- e) Detector = peak;
- f) Ensure that the number of measurement points $\geq$ span/RBW;
- g) Trace mode = max hold;

RESULTS

10.2.1. SPURIOUS RADIATION PLOTS

GSM 1900

GSM GSM1900 GPRS	UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement																																																																																																																																																																																																																																				
	Company: Samsung																																																																																																																																																																																																																																				
	Project #: 4788164548																																																																																																																																																																																																																																				
	Date: 10-13-17																																																																																																																																																																																																																																				
	Test Engineer: YH Lim																																																																																																																																																																																																																																				
	Configuration: EUT / AC Adapter, X Position																																																																																																																																																																																																																																				
	Mode: GPRS 1900 MHz																																																																																																																																																																																																																																				
	Chamber Chamber 2		Pre-amplifier AFS42		Filter Filter 1		Limit Part 24																																																																																																																																																																																																																														
	<table><tr><th>f GHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Distance (m)</th><th>Preamp (dB)</th><th>Filter (dB)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="10">Low Ch, 1850.2MHz</td></tr><tr><td>3.7004</td><td>-10.9</td><td>V</td><td>3.0</td><td>39.7</td><td>1.0</td><td>-49.6</td><td>-13.0</td><td>-36.6</td><td></td></tr><tr><td>5.5506</td><td>-3.7</td><td>V</td><td>3.0</td><td>39.9</td><td>1.0</td><td>-42.7</td><td>-13.0</td><td>-29.7</td><td></td></tr><tr><td>7.4008</td><td>-10.5</td><td>V</td><td>3.0</td><td>39.4</td><td>1.0</td><td>-48.9</td><td>-13.0</td><td>-35.9</td><td></td></tr><tr><td>3.7004</td><td>-9.0</td><td>H</td><td>3.0</td><td>39.7</td><td>1.0</td><td>-47.7</td><td>-13.0</td><td>-34.7</td><td></td></tr><tr><td>5.5506</td><td>-6.7</td><td>H</td><td>3.0</td><td>39.9</td><td>1.0</td><td>-45.7</td><td>-13.0</td><td>-32.7</td><td></td></tr><tr><td>7.4008</td><td>-10.7</td><td>H</td><td>3.0</td><td>39.4</td><td>1.0</td><td>-49.1</td><td>-13.0</td><td>-36.1</td><td></td></tr><tr><td colspan="10">Mid Ch, 1880.0MHz</td></tr><tr><td>3.7600</td><td>-10.4</td><td>V</td><td>3.0</td><td>39.7</td><td>1.0</td><td>-49.1</td><td>-13.0</td><td>-36.1</td><td></td></tr><tr><td>5.6400</td><td>-6.4</td><td>V</td><td>3.0</td><td>40.0</td><td>1.0</td><td>-45.3</td><td>-13.0</td><td>-32.3</td><td></td></tr><tr><td>7.5200</td><td>-10.5</td><td>V</td><td>3.0</td><td>39.4</td><td>1.0</td><td>-48.9</td><td>-13.0</td><td>-35.9</td><td></td></tr><tr><td>3.7600</td><td>-10.6</td><td>H</td><td>3.0</td><td>39.7</td><td>1.0</td><td>-49.3</td><td>-13.0</td><td>-36.3</td><td></td></tr><tr><td>5.6400</td><td>-9.2</td><td>H</td><td>3.0</td><td>40.0</td><td>1.0</td><td>-48.2</td><td>-13.0</td><td>-35.2</td><td></td></tr><tr><td>7.5200</td><td>-10.6</td><td>H</td><td>3.0</td><td>39.4</td><td>1.0</td><td>-49.0</td><td>-13.0</td><td>-36.0</td><td></td></tr><tr><td colspan="10">High Ch, 1909.8 MHz</td></tr><tr><td>3.8196</td><td>-8.5</td><td>V</td><td>3.0</td><td>39.7</td><td>1.0</td><td>-47.3</td><td>-13.0</td><td>-34.3</td><td></td></tr><tr><td>5.7294</td><td>-8.2</td><td>V</td><td>3.0</td><td>40.0</td><td>1.0</td><td>-47.2</td><td>-13.0</td><td>-34.2</td><td></td></tr><tr><td>7.6392</td><td>-10.7</td><td>V</td><td>3.0</td><td>39.3</td><td>1.0</td><td>-49.0</td><td>-13.0</td><td>-36.0</td><td></td></tr><tr><td>3.8196</td><td>-7.8</td><td>H</td><td>3.0</td><td>39.7</td><td>1.0</td><td>-46.5</td><td>-13.0</td><td>-33.5</td><td></td></tr><tr><td>5.7294</td><td>-11.3</td><td>H</td><td>3.0</td><td>40.0</td><td>1.0</td><td>-50.3</td><td>-13.0</td><td>-37.3</td><td></td></tr><tr><td>7.6392</td><td>-10.6</td><td>H</td><td>3.0</td><td>39.3</td><td>1.0</td><td>-48.9</td><td>-13.0</td><td>-35.9</td><td></td></tr></table>										f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch, 1850.2MHz										3.7004	-10.9	V	3.0	39.7	1.0	-49.6	-13.0	-36.6		5.5506	-3.7	V	3.0	39.9	1.0	-42.7	-13.0	-29.7		7.4008	-10.5	V	3.0	39.4	1.0	-48.9	-13.0	-35.9		3.7004	-9.0	H	3.0	39.7	1.0	-47.7	-13.0	-34.7		5.5506	-6.7	H	3.0	39.9	1.0	-45.7	-13.0	-32.7		7.4008	-10.7	H	3.0	39.4	1.0	-49.1	-13.0	-36.1		Mid Ch, 1880.0MHz										3.7600	-10.4	V	3.0	39.7	1.0	-49.1	-13.0	-36.1		5.6400	-6.4	V	3.0	40.0	1.0	-45.3	-13.0	-32.3		7.5200	-10.5	V	3.0	39.4	1.0	-48.9	-13.0	-35.9		3.7600	-10.6	H	3.0	39.7	1.0	-49.3	-13.0	-36.3		5.6400	-9.2	H	3.0	40.0	1.0	-48.2	-13.0	-35.2		7.5200	-10.6	H	3.0	39.4	1.0	-49.0	-13.0	-36.0		High Ch, 1909.8 MHz										3.8196	-8.5	V	3.0	39.7	1.0	-47.3	-13.0	-34.3		5.7294	-8.2	V	3.0	40.0	1.0	-47.2	-13.0	-34.2		7.6392	-10.7	V	3.0	39.3	1.0	-49.0	-13.0	-36.0		3.8196	-7.8	H	3.0	39.7	1.0	-46.5	-13.0	-33.5		5.7294	-11.3	H	3.0	40.0	1.0	-50.3	-13.0	-37.3		7.6392	-10.6	H	3.0	39.3	1.0	-48.9	-13.0	-35.9
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																																																																																																																																																												
Low Ch, 1850.2MHz																																																																																																																																																																																																																																					
3.7004	-10.9	V	3.0	39.7	1.0	-49.6	-13.0	-36.6																																																																																																																																																																																																																													
5.5506	-3.7	V	3.0	39.9	1.0	-42.7	-13.0	-29.7																																																																																																																																																																																																																													
7.4008	-10.5	V	3.0	39.4	1.0	-48.9	-13.0	-35.9																																																																																																																																																																																																																													
3.7004	-9.0	H	3.0	39.7	1.0	-47.7	-13.0	-34.7																																																																																																																																																																																																																													
5.5506	-6.7	H	3.0	39.9	1.0	-45.7	-13.0	-32.7																																																																																																																																																																																																																													
7.4008	-10.7	H	3.0	39.4	1.0	-49.1	-13.0	-36.1																																																																																																																																																																																																																													
Mid Ch, 1880.0MHz																																																																																																																																																																																																																																					
3.7600	-10.4	V	3.0	39.7	1.0	-49.1	-13.0	-36.1																																																																																																																																																																																																																													
5.6400	-6.4	V	3.0	40.0	1.0	-45.3	-13.0	-32.3																																																																																																																																																																																																																													
7.5200	-10.5	V	3.0	39.4	1.0	-48.9	-13.0	-35.9																																																																																																																																																																																																																													
3.7600	-10.6	H	3.0	39.7	1.0	-49.3	-13.0	-36.3																																																																																																																																																																																																																													
5.6400	-9.2	H	3.0	40.0	1.0	-48.2	-13.0	-35.2																																																																																																																																																																																																																													
7.5200	-10.6	H	3.0	39.4	1.0	-49.0	-13.0	-36.0																																																																																																																																																																																																																													
High Ch, 1909.8 MHz																																																																																																																																																																																																																																					
3.8196	-8.5	V	3.0	39.7	1.0	-47.3	-13.0	-34.3																																																																																																																																																																																																																													
5.7294	-8.2	V	3.0	40.0	1.0	-47.2	-13.0	-34.2																																																																																																																																																																																																																													
7.6392	-10.7	V	3.0	39.3	1.0	-49.0	-13.0	-36.0																																																																																																																																																																																																																													
3.8196	-7.8	H	3.0	39.7	1.0	-46.5	-13.0	-33.5																																																																																																																																																																																																																													
5.7294	-11.3	H	3.0	40.0	1.0	-50.3	-13.0	-37.3																																																																																																																																																																																																																													
7.6392	-10.6	H	3.0	39.3	1.0	-48.9	-13.0	-35.9																																																																																																																																																																																																																													
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.																																																																																																																																																																																																																																					
GSM GSM1900 EGPRS	UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement																																																																																																																																																																																																																																				
	Company: Samsung																																																																																																																																																																																																																																				
	Project #: 4788164548																																																																																																																																																																																																																																				
	Date: 10-13-17																																																																																																																																																																																																																																				
	Test Engineer: YH Lim																																																																																																																																																																																																																																				
	Configuration: EUT / AC Adapter, X Position																																																																																																																																																																																																																																				
	Mode: EGPRS 1900 MHz																																																																																																																																																																																																																																				
	Chamber Chamber 2		Pre-amplifier AFS42		Filter Filter 1		Limit Part 24																																																																																																																																																																																																																														
	<table><tr><th>f GHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Distance (m)</th><th>Preamp (dB)</th><th>Filter (dB)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="10">Low Ch, 1850.2MHz</td></tr><tr><td>3.7004</td><td>-13.9</td><td>V</td><td>3.0</td><td>39.7</td><td>1.0</td><td>-52.5</td><td>-13.0</td><td>-39.5</td><td></td></tr><tr><td>5.5506</td><td>-9.1</td><td>V</td><td>3.0</td><td>39.9</td><td>1.0</td><td>-48.1</td><td>-13.0</td><td>-35.1</td><td></td></tr><tr><td>7.4008</td><td>-11.0</td><td>V</td><td>3.0</td><td>39.4</td><td>1.0</td><td>-49.4</td><td>-13.0</td><td>-36.4</td><td></td></tr><tr><td>3.7004</td><td>-12.1</td><td>H</td><td>3.0</td><td>39.7</td><td>1.0</td><td>-50.8</td><td>-13.0</td><td>-37.8</td><td></td></tr><tr><td>5.5506</td><td>-10.0</td><td>H</td><td>3.0</td><td>39.9</td><td>1.0</td><td>-49.0</td><td>-13.0</td><td>-36.0</td><td></td></tr><tr><td>7.4008</td><td>-11.0</td><td>H</td><td>3.0</td><td>39.4</td><td>1.0</td><td>-49.4</td><td>-13.0</td><td>-36.4</td><td></td></tr><tr><td colspan="10">Mid Ch, 1880.0MHz</td></tr><tr><td>3.7600</td><td>-11.5</td><td>V</td><td>3.0</td><td>39.7</td><td>1.0</td><td>-50.1</td><td>-13.0</td><td>-37.1</td><td></td></tr><tr><td>5.6400</td><td>-8.9</td><td>V</td><td>3.0</td><td>40.0</td><td>1.0</td><td>-47.8</td><td>-13.0</td><td>-34.8</td><td></td></tr><tr><td>7.5200</td><td>-10.7</td><td>V</td><td>3.0</td><td>39.4</td><td>1.0</td><td>-49.1</td><td>-13.0</td><td>-36.1</td><td></td></tr><tr><td>3.7600</td><td>-13.1</td><td>H</td><td>3.0</td><td>39.7</td><td>1.0</td><td>-51.8</td><td>-13.0</td><td>-38.8</td><td></td></tr><tr><td>5.6400</td><td>-12.2</td><td>H</td><td>3.0</td><td>40.0</td><td>1.0</td><td>-51.2</td><td>-13.0</td><td>-38.2</td><td></td></tr><tr><td>7.5200</td><td>-10.7</td><td>H</td><td>3.0</td><td>39.4</td><td>1.0</td><td>-49.1</td><td>-13.0</td><td>-36.1</td><td></td></tr><tr><td colspan="10">High Ch, 1909.8 MHz</td></tr><tr><td>3.8196</td><td>-10.5</td><td>V</td><td>3.0</td><td>39.7</td><td>1.0</td><td>-49.2</td><td>-13.0</td><td>-36.2</td><td></td></tr><tr><td>5.7294</td><td>-10.2</td><td>V</td><td>3.0</td><td>40.0</td><td>1.0</td><td>-49.2</td><td>-13.0</td><td>-36.2</td><td></td></tr><tr><td>7.6392</td><td>-10.2</td><td>V</td><td>3.0</td><td>39.3</td><td>1.0</td><td>-48.5</td><td>-13.0</td><td>-35.5</td><td></td></tr><tr><td>3.8196</td><td>-10.9</td><td>H</td><td>3.0</td><td>39.7</td><td>1.0</td><td>-49.6</td><td>-13.0</td><td>-36.6</td><td></td></tr><tr><td>5.7294</td><td>-11.5</td><td>H</td><td>3.0</td><td>40.0</td><td>1.0</td><td>-50.5</td><td>-13.0</td><td>-37.5</td><td></td></tr><tr><td>7.6392</td><td>-10.9</td><td>H</td><td>3.0</td><td>39.3</td><td>1.0</td><td>-49.2</td><td>-13.0</td><td>-36.2</td><td></td></tr></table>										f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch, 1850.2MHz										3.7004	-13.9	V	3.0	39.7	1.0	-52.5	-13.0	-39.5		5.5506	-9.1	V	3.0	39.9	1.0	-48.1	-13.0	-35.1		7.4008	-11.0	V	3.0	39.4	1.0	-49.4	-13.0	-36.4		3.7004	-12.1	H	3.0	39.7	1.0	-50.8	-13.0	-37.8		5.5506	-10.0	H	3.0	39.9	1.0	-49.0	-13.0	-36.0		7.4008	-11.0	H	3.0	39.4	1.0	-49.4	-13.0	-36.4		Mid Ch, 1880.0MHz										3.7600	-11.5	V	3.0	39.7	1.0	-50.1	-13.0	-37.1		5.6400	-8.9	V	3.0	40.0	1.0	-47.8	-13.0	-34.8		7.5200	-10.7	V	3.0	39.4	1.0	-49.1	-13.0	-36.1		3.7600	-13.1	H	3.0	39.7	1.0	-51.8	-13.0	-38.8		5.6400	-12.2	H	3.0	40.0	1.0	-51.2	-13.0	-38.2		7.5200	-10.7	H	3.0	39.4	1.0	-49.1	-13.0	-36.1		High Ch, 1909.8 MHz										3.8196	-10.5	V	3.0	39.7	1.0	-49.2	-13.0	-36.2		5.7294	-10.2	V	3.0	40.0	1.0	-49.2	-13.0	-36.2		7.6392	-10.2	V	3.0	39.3	1.0	-48.5	-13.0	-35.5		3.8196	-10.9	H	3.0	39.7	1.0	-49.6	-13.0	-36.6		5.7294	-11.5	H	3.0	40.0	1.0	-50.5	-13.0	-37.5		7.6392	-10.9	H	3.0	39.3	1.0	-49.2	-13.0	-36.2
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																																																																																																																																																												
Low Ch, 1850.2MHz																																																																																																																																																																																																																																					
3.7004	-13.9	V	3.0	39.7	1.0	-52.5	-13.0	-39.5																																																																																																																																																																																																																													
5.5506	-9.1	V	3.0	39.9	1.0	-48.1	-13.0	-35.1																																																																																																																																																																																																																													
7.4008	-11.0	V	3.0	39.4	1.0	-49.4	-13.0	-36.4																																																																																																																																																																																																																													
3.7004	-12.1	H	3.0	39.7	1.0	-50.8	-13.0	-37.8																																																																																																																																																																																																																													
5.5506	-10.0	H	3.0	39.9	1.0	-49.0	-13.0	-36.0																																																																																																																																																																																																																													
7.4008	-11.0	H	3.0	39.4	1.0	-49.4	-13.0	-36.4																																																																																																																																																																																																																													
Mid Ch, 1880.0MHz																																																																																																																																																																																																																																					
3.7600	-11.5	V	3.0	39.7	1.0	-50.1	-13.0	-37.1																																																																																																																																																																																																																													
5.6400	-8.9	V	3.0	40.0	1.0	-47.8	-13.0	-34.8																																																																																																																																																																																																																													
7.5200	-10.7	V	3.0	39.4	1.0	-49.1	-13.0	-36.1																																																																																																																																																																																																																													
3.7600	-13.1	H	3.0	39.7	1.0	-51.8	-13.0	-38.8																																																																																																																																																																																																																													
5.6400	-12.2	H	3.0	40.0	1.0	-51.2	-13.0	-38.2																																																																																																																																																																																																																													
7.5200	-10.7	H	3.0	39.4	1.0	-49.1	-13.0	-36.1																																																																																																																																																																																																																													
High Ch, 1909.8 MHz																																																																																																																																																																																																																																					
3.8196	-10.5	V	3.0	39.7	1.0	-49.2	-13.0	-36.2																																																																																																																																																																																																																													
5.7294	-10.2	V	3.0	40.0	1.0	-49.2	-13.0	-36.2																																																																																																																																																																																																																													
7.6392	-10.2	V	3.0	39.3	1.0	-48.5	-13.0	-35.5																																																																																																																																																																																																																													
3.8196	-10.9	H	3.0	39.7	1.0	-49.6	-13.0	-36.6																																																																																																																																																																																																																													
5.7294	-11.5	H	3.0	40.0	1.0	-50.5	-13.0	-37.5																																																																																																																																																																																																																													
7.6392	-10.9	H	3.0	39.3	1.0	-49.2	-13.0	-36.2																																																																																																																																																																																																																													
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.																																																																																																																																																																																																																																					