



3M BW QPSK

Low channel (30 MHz ~ 10 GHz)

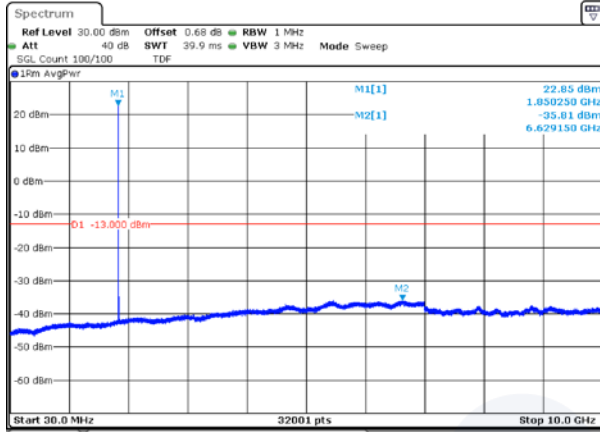


Date: 18.AUG.2025 13:51:23

Low channel (10 GHz ~ 20 GHz)

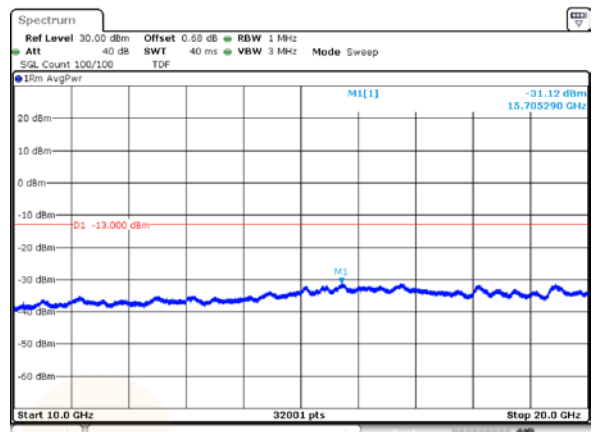


Date: 18.AUG.2025 13:51:54

Middle channel (30 MHz ~ 10 GHz)

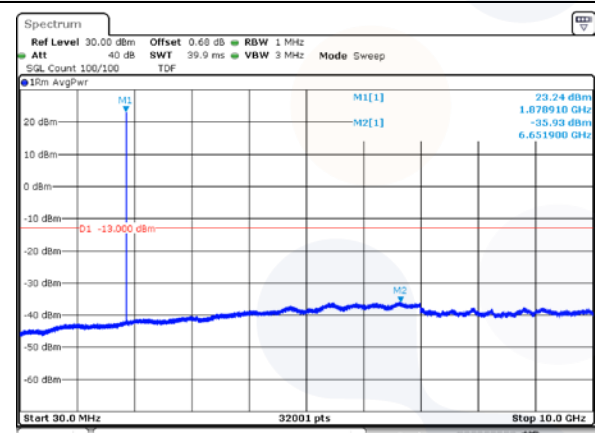


Date: 18.AUG.2025 13:55:10

Middle channel (10 GHz ~ 20 GHz)

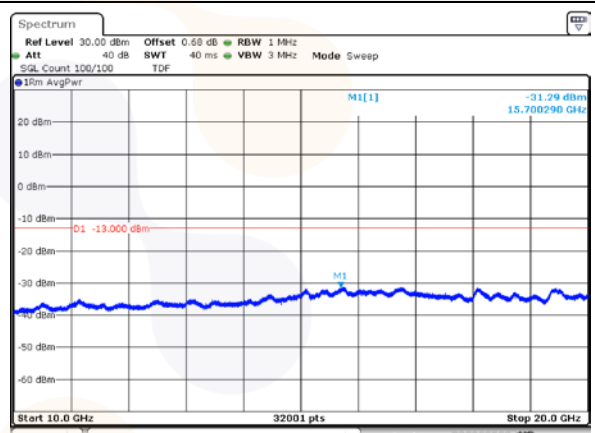


Date: 18.AUG.2025 13:55:42

High channel (30 MHz ~ 10 GHz)

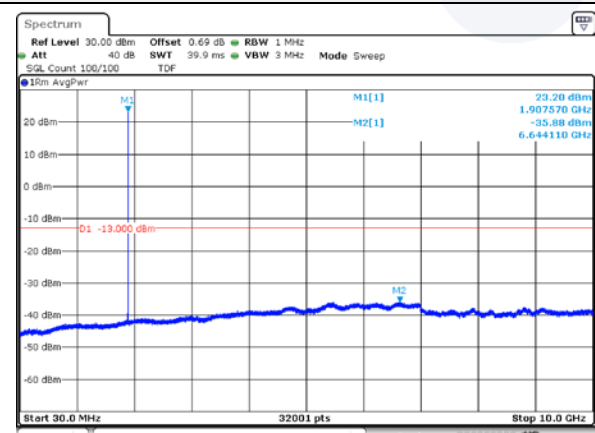

Date: 18.AUG.2025 13:58:34


High channel (10 GHz ~ 20 GHz)

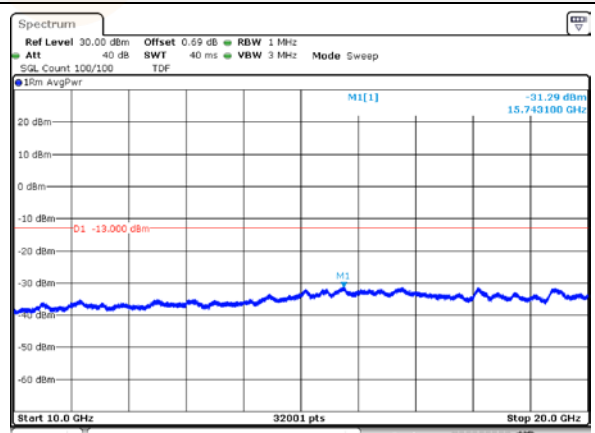


Date: 18.AUG.2025 13:59:05

5M BW QPSK


Low channel (30 MHz ~ 10 GHz)

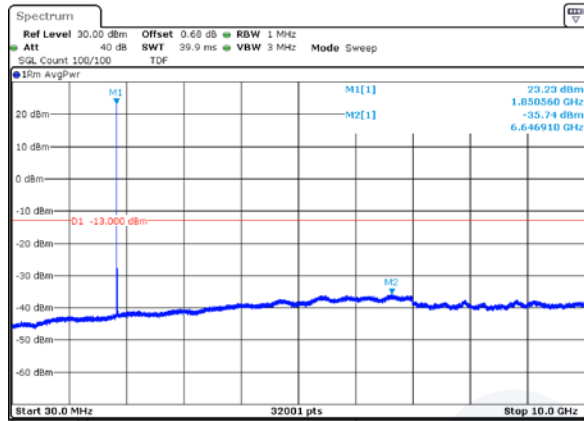


Low channel (10 GHz ~ 20 GHz)

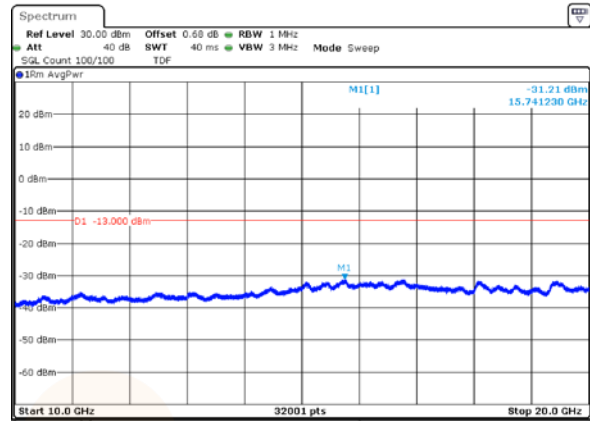


Middle channel (30 MHz ~ 10 GHz)

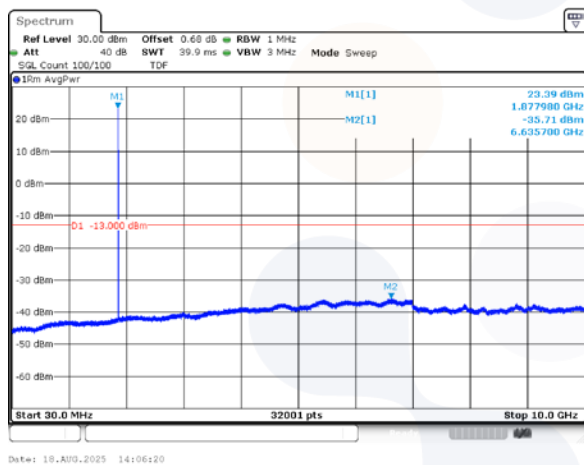


Middle channel (10 GHz ~ 20 GHz)

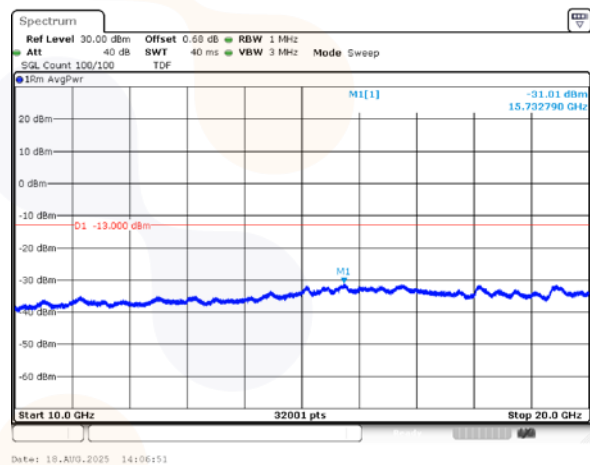

High channel (30 MHz ~ 10 GHz)

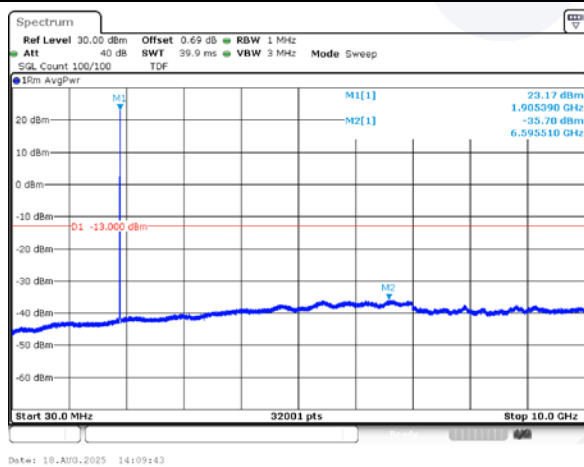


High channel (10 GHz ~ 20 GHz)

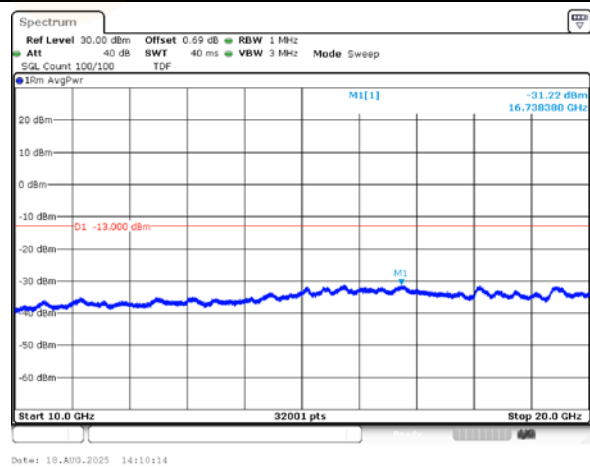


10M BW QPSK


Low channel (30 MHz ~ 10 GHz)

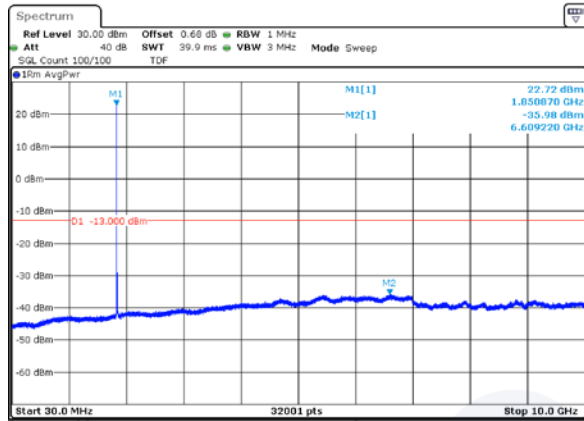


Low channel (10 GHz ~ 20 GHz)

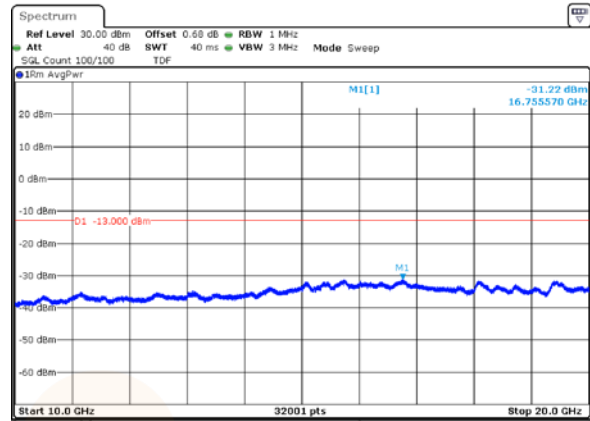


Middle channel (30 MHz ~ 10 GHz)

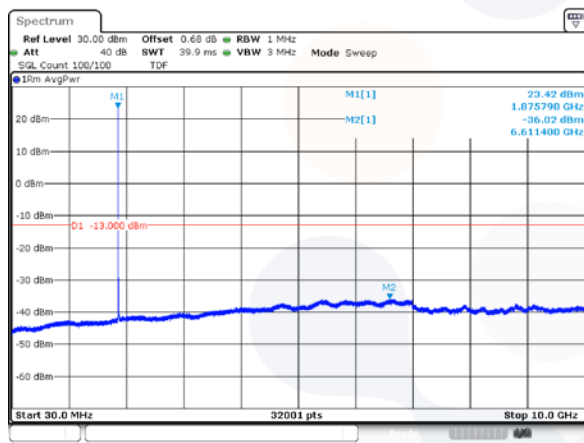


Middle channel (10 GHz ~ 20 GHz)

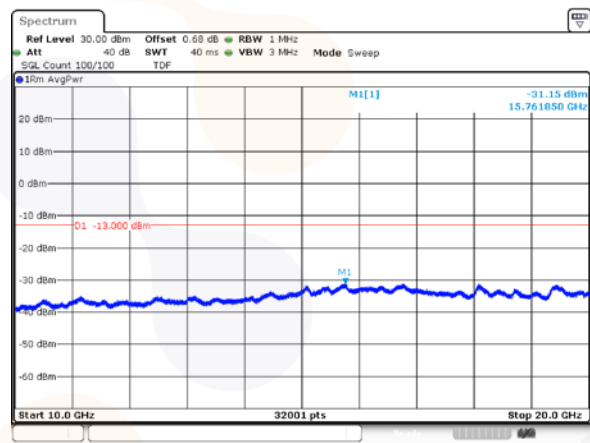

High channel (30 MHz ~ 10 GHz)

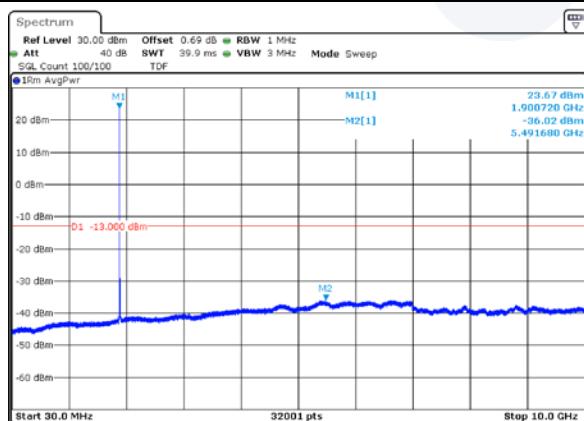


High channel (10 GHz ~ 20 GHz)

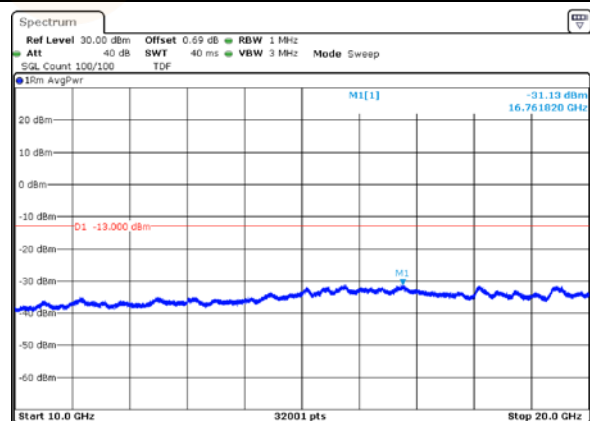


15M BW QPSK

Low channel (30 MHz ~ 10 GHz)

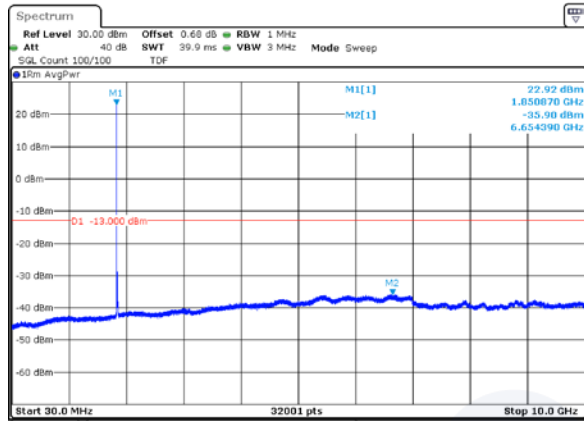


Date: 19.AUG.2025 14:24:47

Low channel (10 GHz ~ 20 GHz)

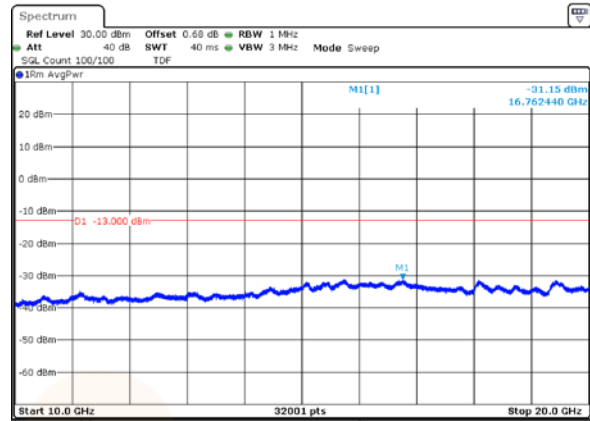


Date: 19.AUG.2025 14:25:19

Middle channel (30 MHz ~ 10 GHz)

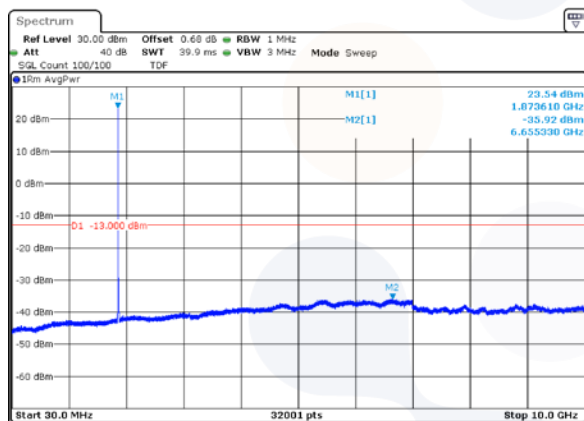


Date: 19.AUG.2025 14:28:39

Middle channel (10 GHz ~ 20 GHz)

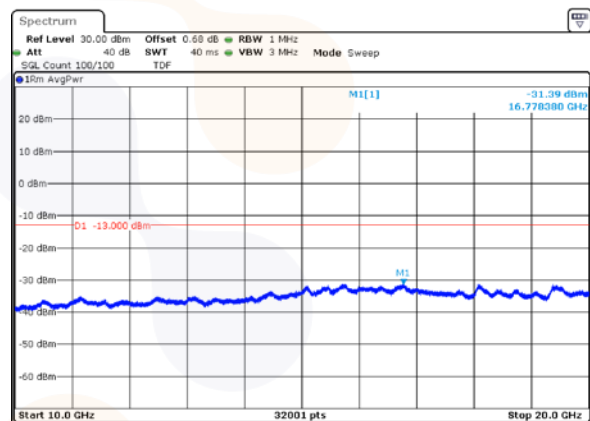


Date: 19.AUG.2025 14:29:10

High channel (30 MHz ~ 10 GHz)

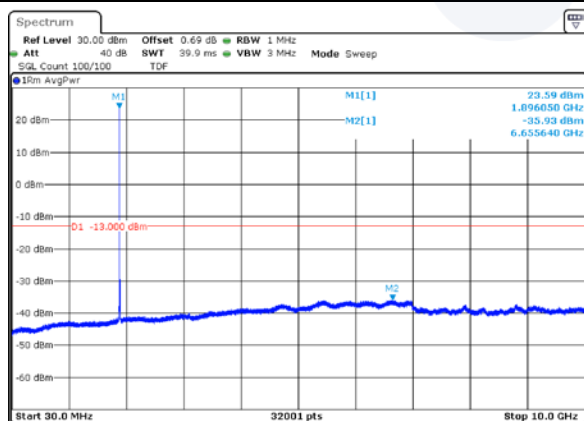

Date: 19.AUG.2025 14:31:59


High channel (10 GHz ~ 20 GHz)

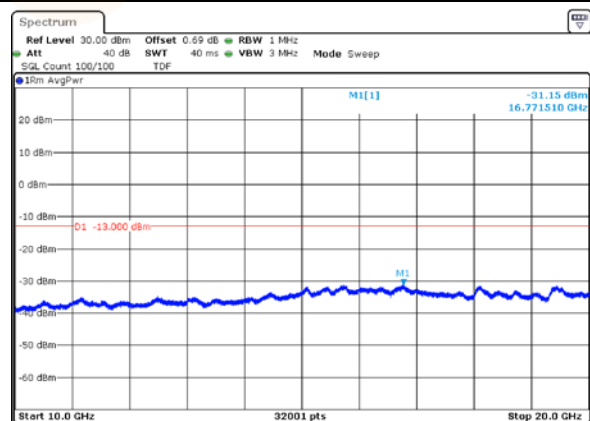

Date: 19.AUG.2025 14:32:33


20M BW QPSK

Low channel (30 MHz ~ 10 GHz)

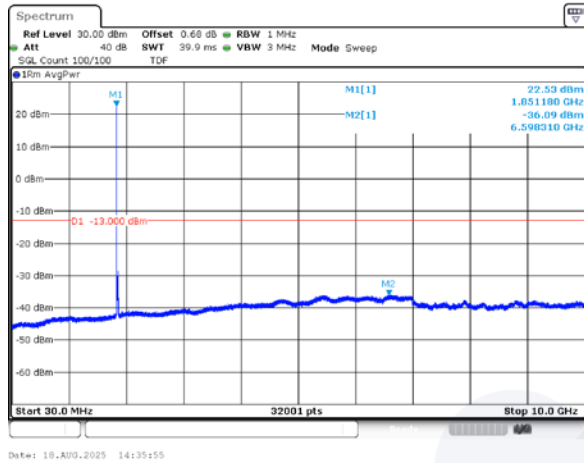


Date: 19.AUG.2025 14:35:55

Low channel (10 GHz ~ 20 GHz)

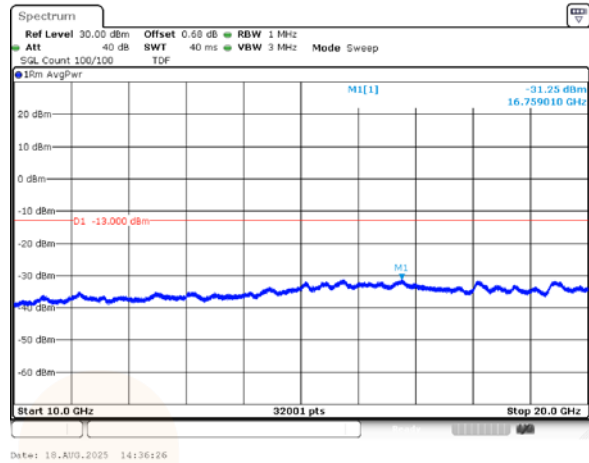


Date: 19.AUG.2025 14:36:26

Middle channel (30 MHz ~ 10 GHz)

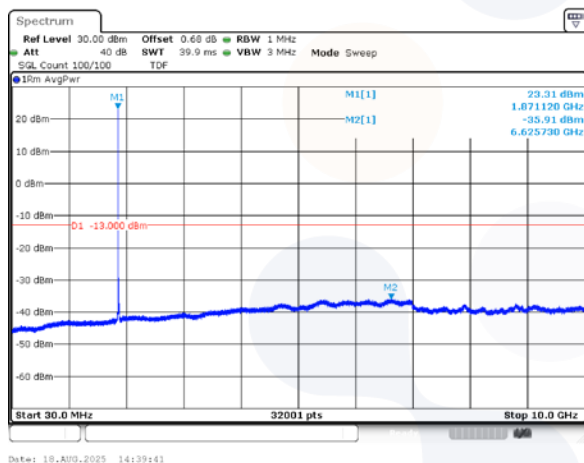


Date: 19.AUG.2025 14:39:43

Middle channel (10 GHz ~ 20 GHz)

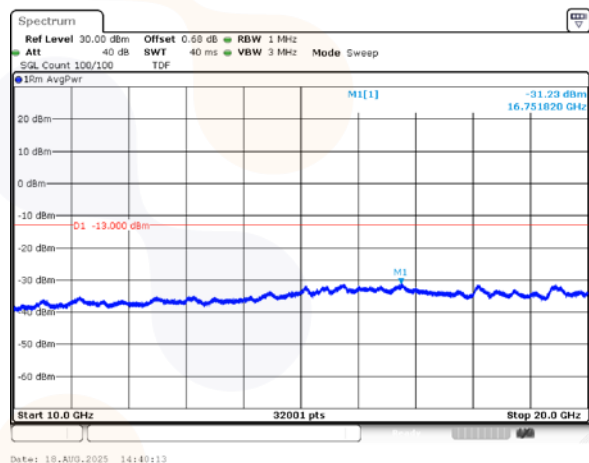


Date: 19.AUG.2025 14:40:13

High channel (30 MHz ~ 10 GHz)

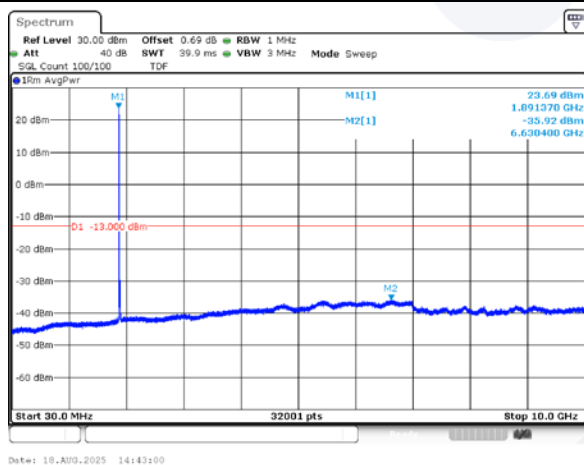

Date: 19.AUG.2025 14:43:00


High channel (10 GHz ~ 20 GHz)

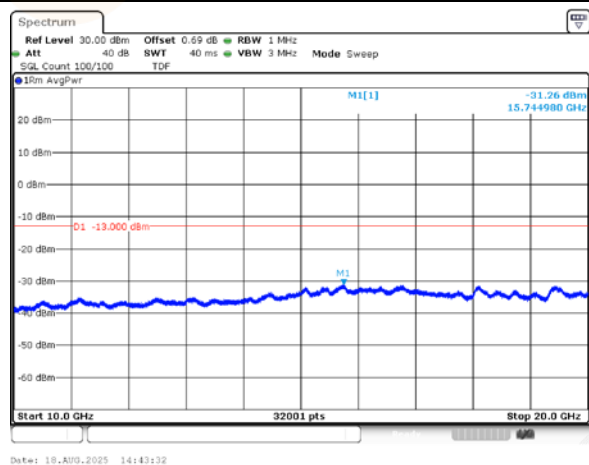

Date: 19.AUG.2025 14:43:32

7.5. Peak to Average Power Ratio (PAPR)

Test setup

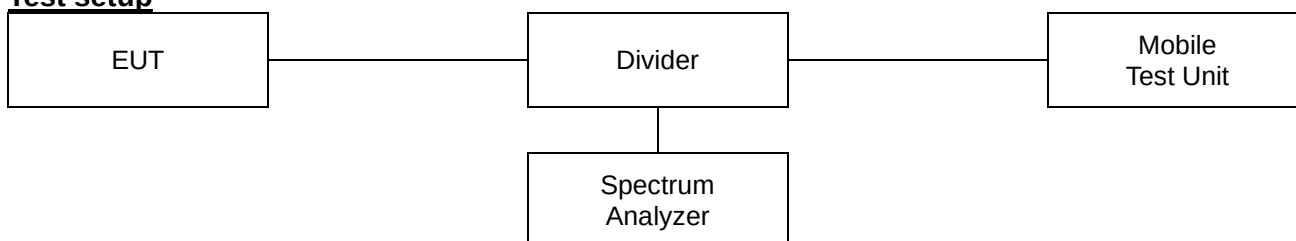

Limit

According to §24.232(d),

The peak-to-average ratio(PAR) of the transmission must not exceed 13 dB.

Test procedure

971168 D01 v03r01 - Section 5.7.2 or 5.7.3

ANSI 63.26-2015 – Section 5.2.3.4 or 5.2.6

Test settings

5.2.3.4 Measurement of peak power in a broadband noise-like signal using CCDF

- 1) Set resolution/measurement bandwidth $\geq$ OBW or specified reference bandwidth
- 2) Set the number of counts to a value that stabilizes the measured CCDF curve.
- 3) Set the measurement interval as follows:
 - a) For continuous transmissions, set to the greater of $[10 \times (\text{number of points in sweep}) \times (\text{transmission symbol period})]$ or 1 ms.
 - b) For burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize. Set the measurement interval to a time that is less than or equal to the burst duration.
 - c) If there are several carriers in a single antenna port, the peak power shall be determined for each individual carrier (by disabling the other carriers while measuring the required carrier) and the total peak power calculated from the sum of the individual carrier peak powers.
- 4) Record the maximum PAPR level associated with a probability of 0.1%

5.2.6 Peak-to-average power ratio


Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{PK} .

Use one of the applicable procedure presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{AG} . Determine the P.A.P.R from:


$$PAPR(dB) = P_{PK}(dBm \text{ or } dBW) - P_{AG}(dBm \text{ or } dBW)$$

Test results

Test mode: GSM 1900

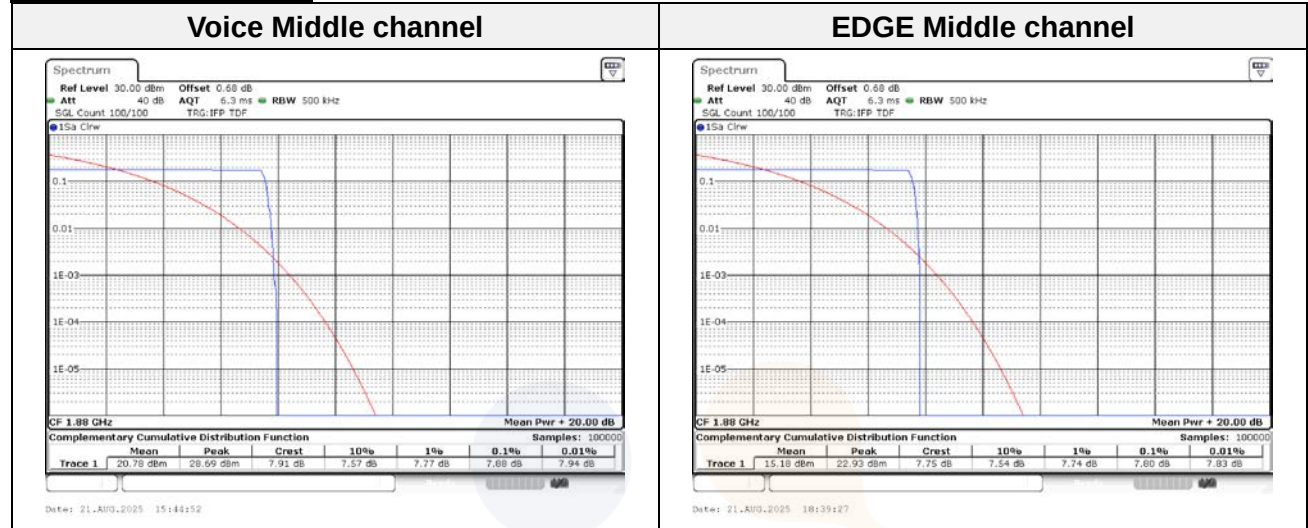


WCDMA 1900

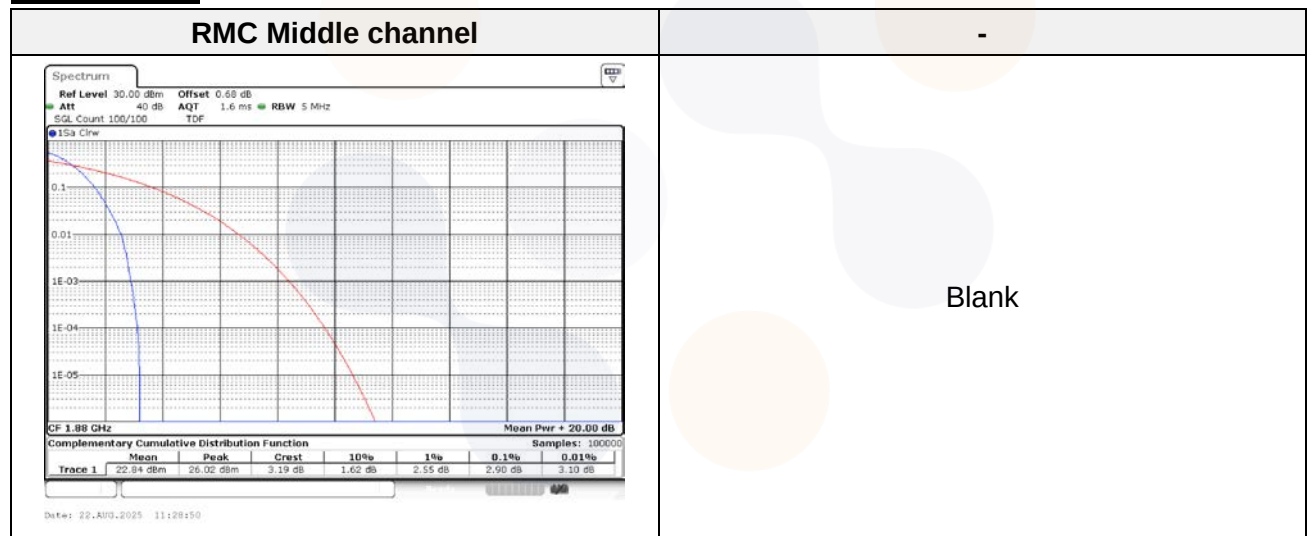


Test mode: LTE B2


1.4M BW QPSK Middle channel

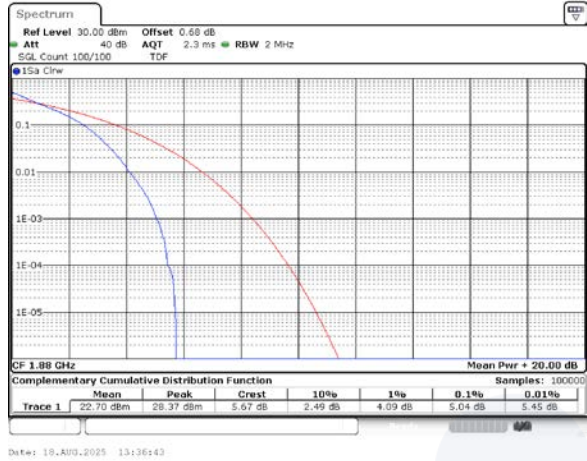


1.4M BW 16QAM Middle channel

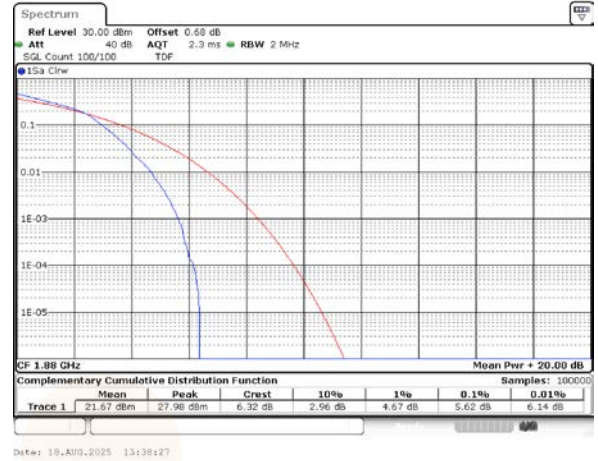


3M BW QPSK Middle channel

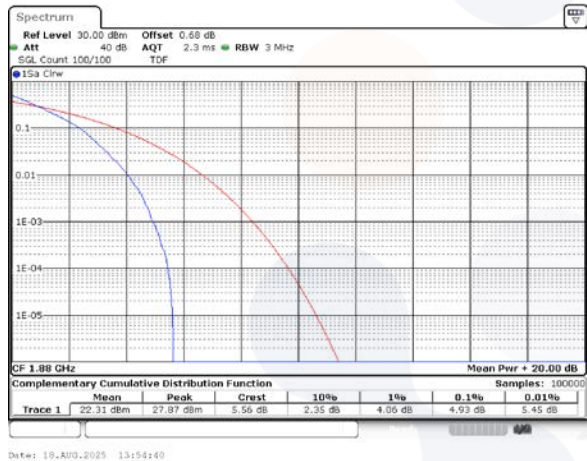


3M BW 16QAM Middle channel

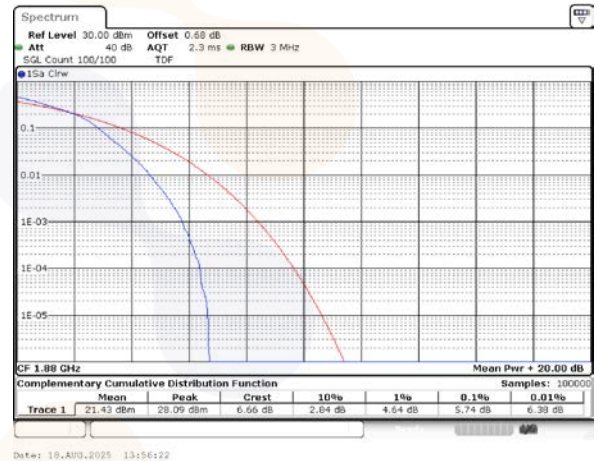


5M BW QPSK Middle channel

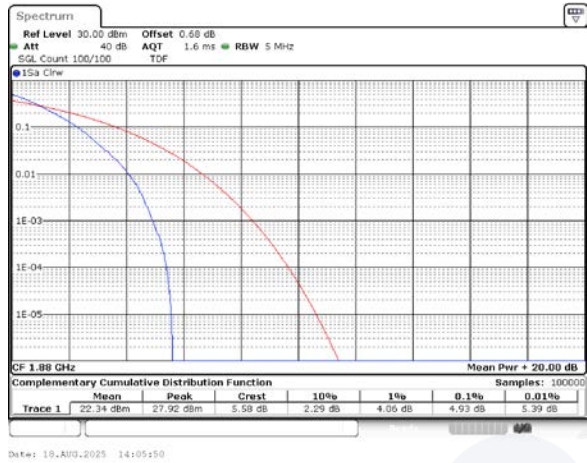


5M BW 16QAM Middle channel

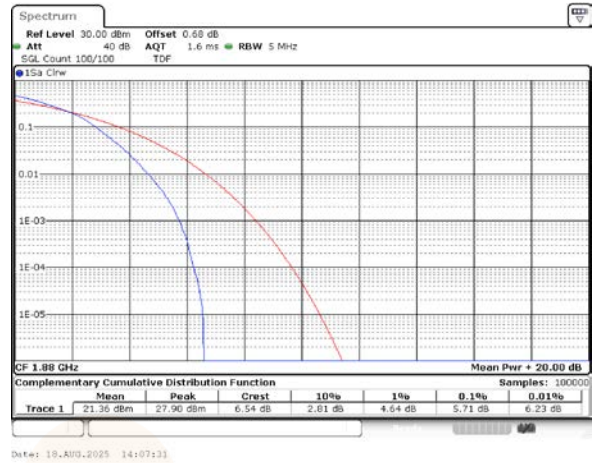


10M BW QPSK Middle channel

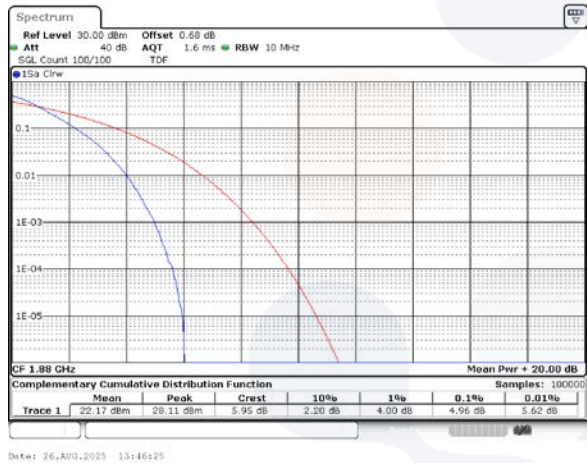


10M BW 16QAM Middle channel

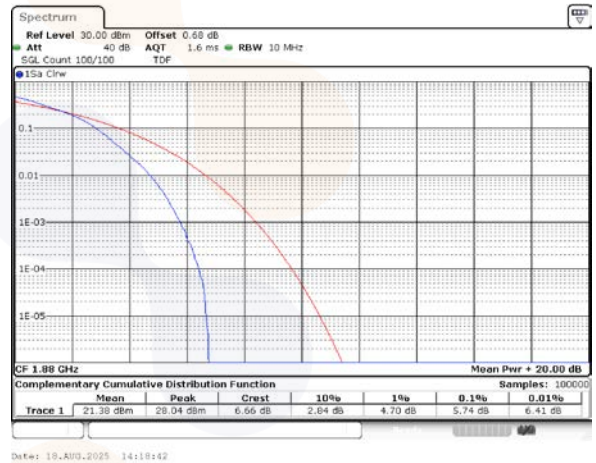


15M BW QPSK Middle channel

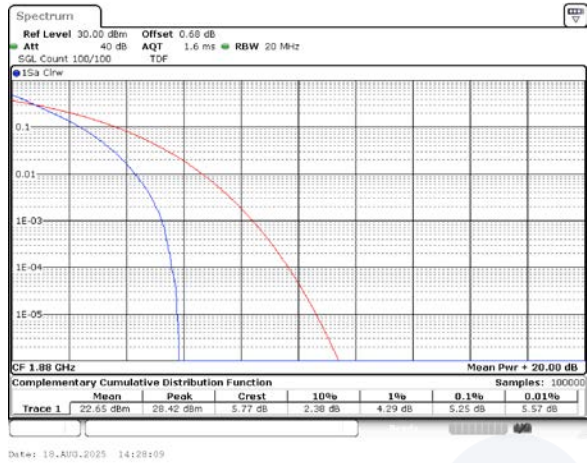


15M BW 16QAM Middle channel

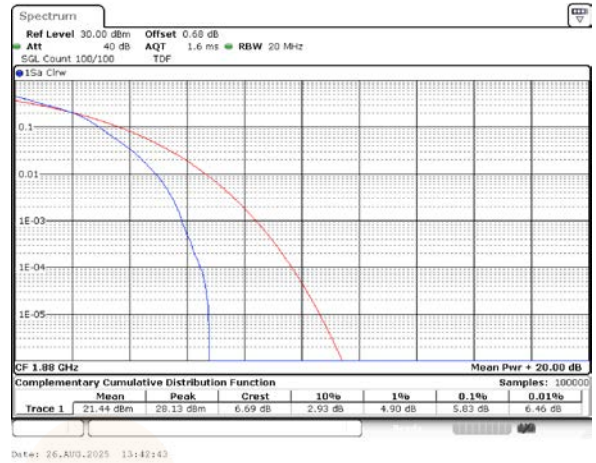

20M BW QPSK Middle channel

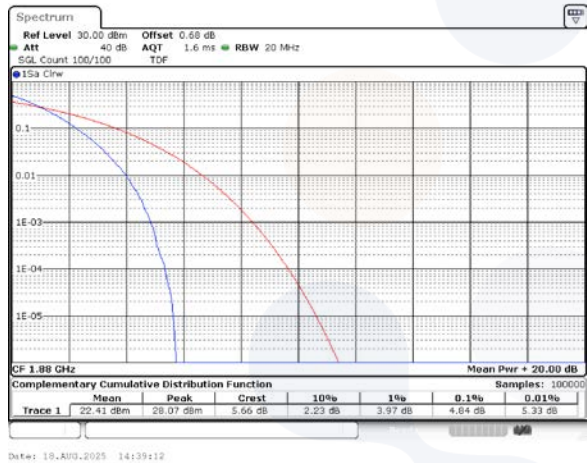


20M BW 16QAM Middle channel

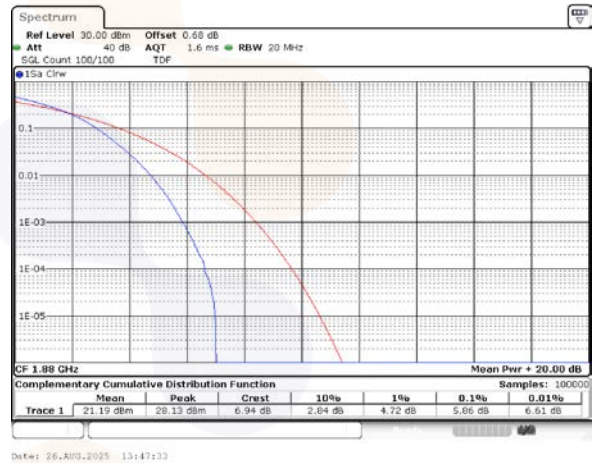

7.6. Frequency stability

Test setup

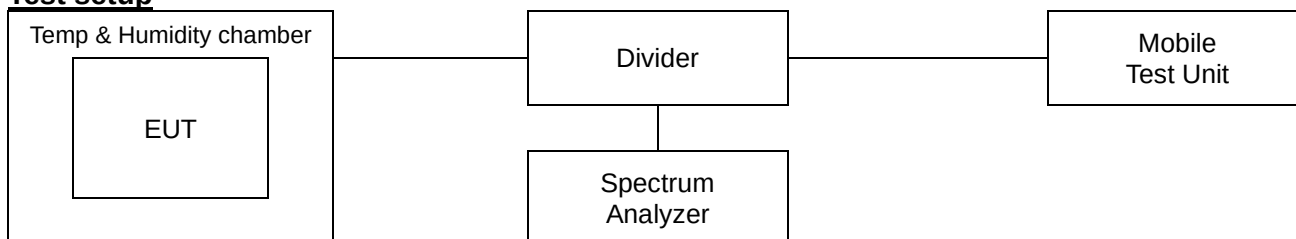

Limit

According to §2.1055(a),

The frequency stability shall be measured with variation of ambient temperature as follows:

- 1) From -30° to + 50° centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.
- 2) From -20° to + 50° centigrade for equipment to be licensed for use in the maritime services under part 80 of this chapter, except for class A, B, and S emergency position indicating radiobeacons (EPIRBS), and equipment to be licensed for use above 952 MHz at operational fixed stations in all services, stations in the local television transmission service and point-to-point microwave radio service under part 21 of this chapter, equipment licensed for use aboard aircraft in the aviation services under part 87 of this chapter, and equipment authorized for use in the family radio service under part 95 of this chapter.
- 3) From 0° to + 50° centigrade for equipment to be licensed for use in the radio broadcast Services under part 73 of this chapter.

According to §2.1055(d),

The frequency stability shall be measured with variation of primary supply Voltage as follows:

- 1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
- 2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating and point which shall be specified by the manufacturer.
- 3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

According to §24.235,

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-4904-0113 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR25-SRF0175 Page (54) of (68)	 
---	--	---

Test procedure

ANSI 63.26-2015 – Section 5.6

Test settings


- 1) The carrier frequency of the transmitter is measured at room temperature. (20°C to provide a reference)
- 2) The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3) Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each Temperature level.



Test results


Test mode : GSM 1900
 Frequency (Hz) : 1 880 000 000
 Channel : 661
 Deviation limit : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Voltage (%)	Power (V)	Temp. (°C)	Frequency (Hz)	Frequency error (Hz)	Deviation	
					(ppm)	(%)
100%	3.85	+23(Ref)	1,879,999,997	-2.71	0.0	0.000 000
		-30	1,880,000,004	3.97	0.0	0.000 000
		-20	1,880,000,003	3.49	0.0	0.000 000
		-10	1,880,000,005	5.00	0.0	0.000 000
		0	1,880,000,002	1.52	0.0	0.000 000
		+10	1,879,999,999	-0.59	0.0	0.000 000
		+20	1,879,999,999	-1.18	0.0	0.000 000
		+30	1,880,000,000	-0.16	0.0	0.000 000
		+40	1,879,999,995	-5.13	0.0	0.000 000
		+50	1,879,999,991	-9.14	0.0	0.000 000
115%	4.40	+23(Ref)	1,879,999,996	-4.23	0.0	0.000 000
End point	3.65	+23(Ref)	1,880,000,000	-0.48	0.0	0.000 000

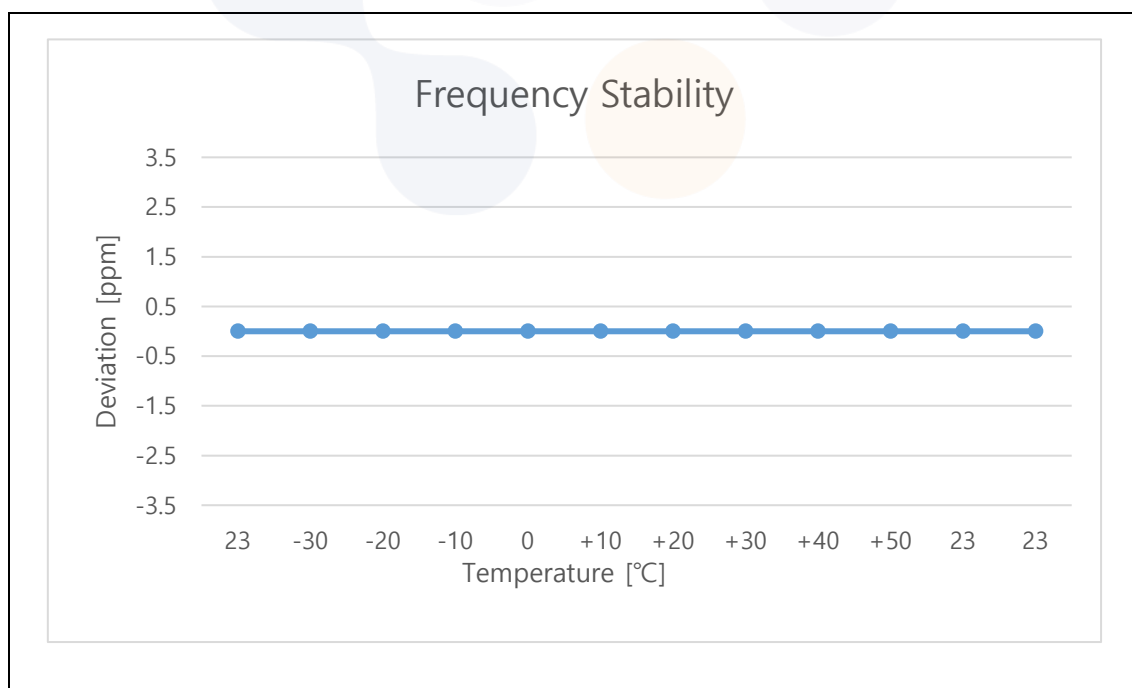


Test mode : WCDMA 1900
 Frequency (Hz) : 1 880 000 000
 Channel : 9400
 Deviation limit : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Voltage (%)	Power (V)	Temp. (°C)	Frequency (Hz)	Frequency error (Hz)	Deviation	
					(ppm)	(%)
100%	3.85	+23(Ref)	1,880,000,001	1.13	0.0	0.000 000
		-30	1,879,999,999	-0.61	0.0	0.000 000
		-20	1,879,999,999	-1.24	0.0	0.000 000
		-10	1,880,000,000	-0.44	0.0	0.000 000
		0	1,879,999,999	-0.84	0.0	0.000 000
		+10	1,880,000,002	2.27	0.0	0.000 000
		+20	1,880,000,002	1.52	0.0	0.000 000
		+30	1,880,000,004	3.88	0.0	0.000 000
		+40	1,880,000,004	3.96	0.0	0.000 000
		+50	1,880,000,004	4.21	0.0	0.000 000
115%	4.40	+23(Ref)	1,880,000,004	4.00	0.0	0.000 000
End point	3.65	+23(Ref)	1,880,000,002	2.28	0.0	0.000 000

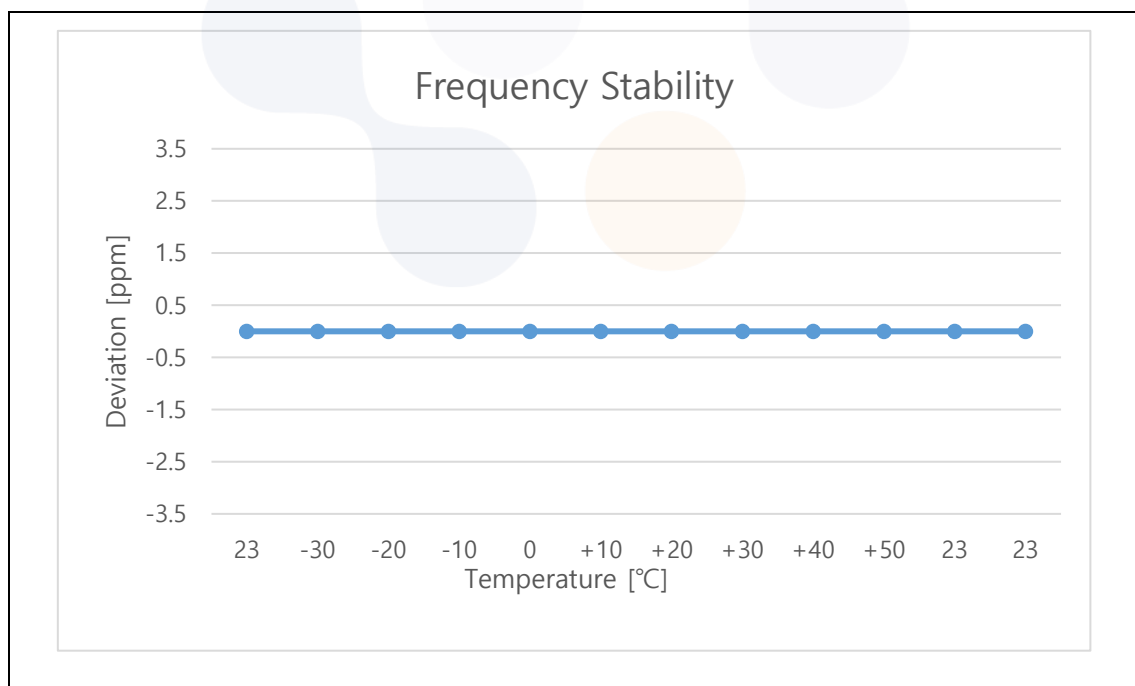

Test mode : LTE B2
 Frequency (Hz) : 1 880 000 000
 Channel : 18900
 Deviation limit : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.


Voltage (%)	Power (V)	Temp. (°C)	Frequency (Hz)	Frequency error (Hz)	Deviation	
					(ppm)	(%)
100%	3.85	+23(Ref)	1,879,999,996	-4.15	0.0	0.000 000
		-30	1,879,999,998	-2.05	0.0	0.000 000
		-20	1,880,000,001	1.00	0.0	0.000 000
		-10	1,879,999,999	-1.39	0.0	0.000 000
		0	1,879,999,999	-1.03	0.0	0.000 000
		+10	1,880,000,002	1.75	0.0	0.000 000
		+20	1,880,000,002	2.25	0.0	0.000 000
		+30	1,880,000,004	4.16	0.0	0.000 000
		+40	1,880,000,006	5.82	0.0	0.000 000
		+50	1,880,000,007	7.37	0.0	0.000 000
115%	4.40	+23(Ref)	1,880,000,000	0.10	0.0	0.000 000
End point	3.65	+23(Ref)	1,880,000,002	1.77	0.0	0.000 000

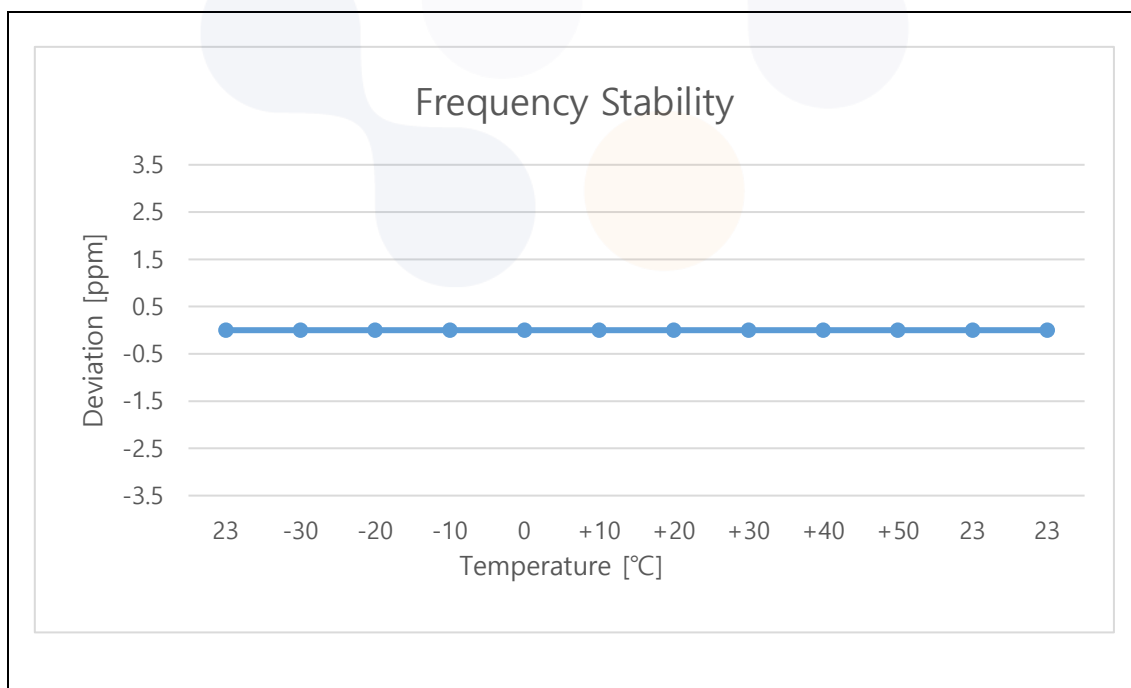


7.7. Radiated Power (EIRP)

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

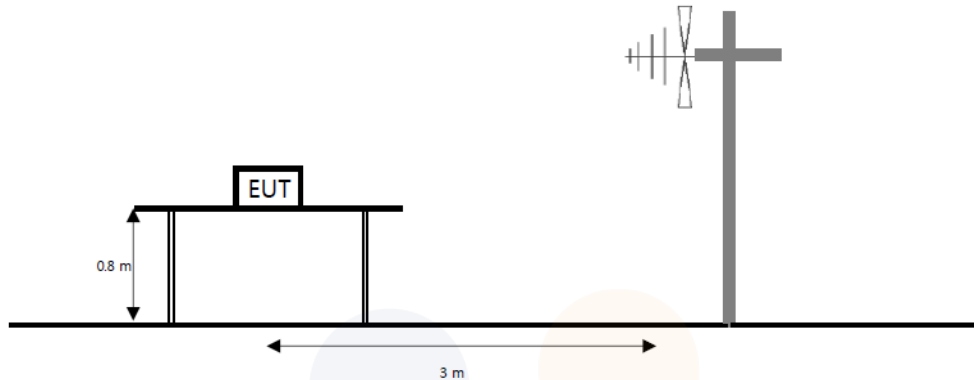

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

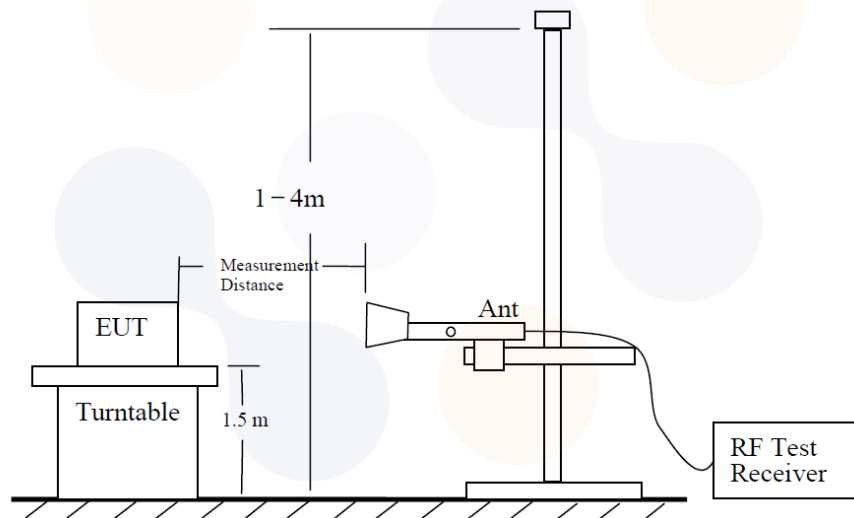

The diagram below shows the test setup for substituted method.

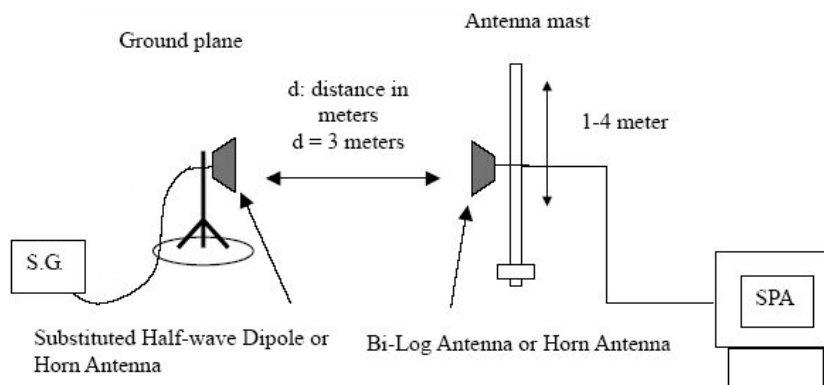

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-4904-0113 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR25-SRF0175 Page (59) of (68)	
--	---	---

Limit

According to §24.232(c),

Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

Test procedure

412172 D01 v01r01

971168 D01 v03r01 - Section 5.2 and 5.8

ANSI 63.26-2015 – Section 5.2

ANSI/TIA-603-E-2016 - Section 2.2.17

Test settings

- 1) RBW = 1 % to 5 % of the OBW.
- 2) VBW $\geq 3 \times$ RBW.
- 3) SPAN = 2 $\times$ to 3 $\times$ the OBW.
- 4) Number of measurement points in sweep $\geq 2 \times$ span / RBW.
- 5) Sweep time :
 - 1) Auto couple, or
 - 2) $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. Transmission period is the on and off time of the transmitter.
- 6) Detector = RMS
- 7) If the EUT can be configured to transmit continuously, then set the trigger to free run.
- 8) If the EUT cannot be configured to transmit continuously, then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Verify that the sweep time is less than or equal to the transmission burst duration. Time gating can also be used under similar constraints (i.e., configured such that measurement data is collected only during active full-power transmissions).
- 9) Trace mode = trace averaging (RMS) over 100 sweeps.
- 10) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band or channel power measurement function, with the band/channel limits set equal to the OBW band edges. If the instrument does not have a band or channel power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- 11) Allow trace to fully stabilize.

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-4904-0113 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR25-SRF0175 Page (60) of (68)	
---	--	---

Notes:

1. On a test site, the EUT shall be placed at 80 cm or 1.5 m height on a turn table, and in the position close to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3 m from EUT to correspond to the fundamental frequency of the transmitter.
3. The turntable is rotated through 360°, and the receiving antenna scans in order to determine the Level of the maximized emission.
4. The test antenna shall be raised and lowered again through the specified range of height until the maximum signal level is detected by the measuring receiver.
5. The maximum signal level detected by the measuring receiver shall be noted.
6. The EUT was replaced by half-wave dipole (1 GHz below) or horn antenna (1 GHz above) connected to a signal generator.
 The power is calculated by the following formula;

$$Pd(\text{dBm}) = Pg(\text{dBm}) - \text{Cable loss (dB)} + \text{Antenna gain (dB)}$$
 Note. Pd is the dipole equivalent power and Pg is the generator output power into the substitution antenna.
 The test antenna shall be raised and lowered through the specified range of height to ensure that
7. The maximum signal is received.
 The input signal to the substitution antenna shall be adjusted to the level that produces a level
8. Detected by the measuring corrected for the change of input attenuator setting of the measuring Receiver.
9. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for Any change of input attenuator setting of the measuring receiver.
10. The measurement shall be repeated with the test antenna and the substitution antenna Orientated for horizontal polarization.

Test results

Test mode: GSM 1900

Mode	Channel	Pol.	Antenna Gain	C.L	Substitute Level	EIRP	
		[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[W]
Voice	Low	H	4.93	9.13	32.11	27.91	0.618
	Middle	H	4.86	9.25	32.22	27.83	0.607
	High	H	4.80	9.27	32.94	28.47	0.703
EDGE	Low	H	4.93	9.13	28.10	23.90	0.245
	Middle	H	4.86	9.25	28.21	23.82	0.241
	High	H	4.80	9.27	28.72	24.25	0.266

Test mode: WCDMA 1900

Mode	Channel	Pol.	Antenna Gain	C.L	Substitute Level	EIRP	
		[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[W]
RMC	Low	H	4.92	9.14	26.48	22.26	0.168
	Middle	H	4.86	9.25	27.23	22.84	0.192
	High	H	4.80	9.27	26.86	22.39	0.173

Note.

1. $E.I.R.P(dBm) = \text{Substitute Level}(dB) + \text{Antenna gain}(dBi) - C.L(\text{Cable loss})(dB)$

Test mode: LTE B2

Bandwidth [MHz]	Modulation	Channel	Pol.	Antenna Gain	C.L	Substitute Level	EIRP	
			[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[W]
1.4	QPSK	Low	H	4.93	9.14	25.93	21.72	0.149
		Middle	H	4.86	9.25	26.73	22.34	0.171
		High	H	4.80	9.28	27.25	22.77	0.189
	16QAM	Low	H	4.93	9.14	24.92	20.70	0.118
		Middle	H	4.86	9.25	25.85	21.46	0.140
		High	H	4.80	9.28	26.26	21.78	0.150
3	QPSK	Low	H	4.93	9.15	25.87	21.64	0.146
		Middle	H	4.86	9.25	26.95	22.56	0.180
		High	H	4.80	9.26	26.64	22.18	0.165
	16QAM	Low	H	4.93	9.15	25.00	20.78	0.120
		Middle	H	4.86	9.25	25.97	21.59	0.144
		High	H	4.80	9.26	25.60	21.14	0.130
5	QPSK	Low	H	4.92	9.15	25.45	21.23	0.133
		Middle	H	4.86	9.25	26.61	22.23	0.167
		High	H	4.80	9.25	26.68	22.24	0.167
	16QAM	Low	H	4.92	9.15	24.48	20.25	0.106
		Middle	H	4.86	9.25	25.51	21.13	0.130
		High	H	4.80	9.25	25.64	21.19	0.132
10	QPSK	Low	H	4.92	9.15	25.56	21.33	0.136
		Middle	H	4.86	9.25	26.41	22.03	0.159
		High	H	4.81	9.26	26.56	22.11	0.162
	16QAM	Low	H	4.92	9.15	24.66	20.43	0.110
		Middle	H	4.86	9.25	25.41	21.02	0.127
		High	H	4.81	9.26	25.66	21.21	0.132
15	QPSK	Low	H	4.91	9.18	25.92	21.65	0.146
		Middle	H	4.86	9.25	26.58	22.20	0.166
		High	H	4.81	9.24	26.59	22.16	0.164
	16QAM	Low	H	4.91	9.18	25.01	20.75	0.119
		Middle	H	4.86	9.25	25.56	21.17	0.131
		High	H	4.81	9.24	25.61	21.19	0.131
20	QPSK	Low	H	4.91	9.18	26.31	22.04	0.160
		Middle	H	4.86	9.25	26.45	22.06	0.161
		High	H	4.82	9.24	26.06	21.64	0.146
	16QAM	Low	H	4.91	9.18	25.42	21.15	0.130
		Middle	H	4.86	9.25	25.66	21.27	0.134
		High	H	4.82	9.24	25.08	20.66	0.116


Note.

1. E.I.R.P(dBm) = Substitute Level(dB) + Antenna gain(dBi) - C.L(Cable loss) (dB)


7.8. Radiated Spurious Emissions

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

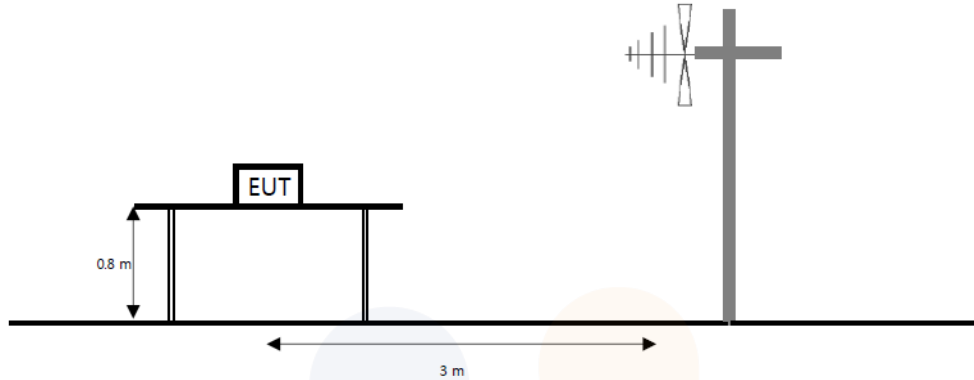

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

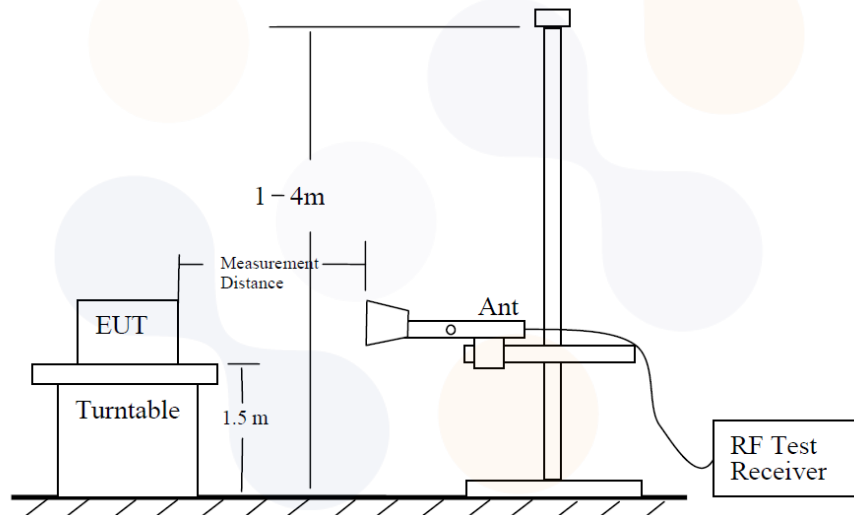

The diagram below shows the test setup for substituted method.

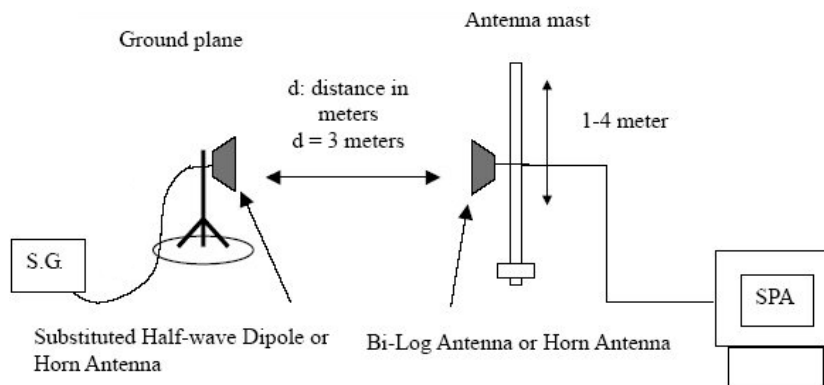

Limit

According to §24.238(a),

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

Test procedure

971168 D01 v03r01 - Section 6.2

ANSI 63.26-2015 – Section 5.5

ANSI/TIA-603-E-2016 - Section 2.2.12

Test settings

- 1) RBW = 100 kHz for below 1 GHz and 1 MHz for above 1 GHz.
- 2) VBW $\geq 3 \times$ RBW.
- 3) Detector = RMS
- 4) Trace mode = Max hold
- 5) Sweep time = Auto couple
- 6) Number of sweep points $\geq 2 \times \text{span} / \text{RBW}$
- 7) Allow trace to fully stabilize.

Notes:

1. On a test site, the EUT shall be placed at 80 cm or 1.5 m height on a turn table, and in the position close to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3 m from EUT to correspond to the fundamental frequency of the transmitter.
3. The turntable is rotated through 360°, and the receiving antenna scans in order to determine the Level of the maximized emission.
4. The test antenna shall be raised and lowered again through the specified range of height until the maximum signal level is detected by the measuring receiver.
5. The maximum signal level detected by the measuring receiver shall be noted.
6. The EUT was replaced by half-wave dipole (1 GHz below) or horn antenna (1 GHz above) connected to a signal generator.
7. The test antenna shall be raised and lowered through the specified range of height to ensure that The maximum signal is received.
8. The input signal to the substitution antenna shall be adjusted to the level that produces a level Detected by the measuring corrected for the change of input attenuator setting of the measuring Receiver.
9. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for Any change of input attenuator setting of the measuring receiver.
10. The measurement shall be repeated with the test antenna and the substitution antenna Orientated for horizontal polarization.

Test results (Above 1 000 MHz)

Main Antenna

Test mode : GSM 1900

Frequency(MHz) : 1 850.2

Channel : 512

Mode	Frequency [MHz]	Pol. [V/H]	Antenna Gain [dBi]	Cable loss [dB]	Substitute Level [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]
Voice	3 703.43	H	8.54	13.12	-49.22	-53.80	-13.00	40.80
	5 551.39	H	10.52	16.44	-45.68	-51.60	-13.00	38.60
	7 401.25	H	12.00	19.30	-41.40	-48.70	-13.00	35.70
	9 252.39	H	13.45	21.16	-37.89	-45.60	-13.00	32.60

Test mode : GSM 1900

Frequency(MHz) : 1 880.0

Channel : 661

Mode	Frequency [MHz]	Pol. [V/H]	Antenna Gain [dBi]	Cable loss [dB]	Substitute Level [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]
Voice	3 760.25	V	8.61	13.34	-47.77	-52.50	-13.00	39.50
	5 640.75	V	10.56	16.30	-46.46	-52.20	-13.00	39.20
	7 521.89	H	12.12	19.04	-41.48	-48.40	-13.00	35.40
	9 399.85	V	13.48	21.55	-39.33	-47.40	-13.00	34.40

Test mode : GSM 1900

Frequency(MHz) : 1 909.8

Channel : 810

Mode	Frequency [MHz]	Pol. [V/H]	Antenna Gain [dBi]	Cable loss [dB]	Substitute Level [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]
Voice	3 819.61	H	8.68	13.26	-51.72	-56.30	-13.00	43.30
	5 728.84	V	10.59	16.62	-45.17	-51.20	-13.00	38.20
	7 639.98	H	12.24	19.45	-39.19	-46.40	-13.00	33.40
	9 547.30	V	13.47	21.55	-37.82	-45.90	-13.00	32.90

Note.

1. $E.I.R.P(dBm) = \text{Substitute Level}(dB) + \text{Antenna gain}(dBi) - C.L(\text{Cable loss})(dB)$

Test mode : WCDMA 1900

Frequency(MHz) : 1 852.4

Channel : 9262

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
RMC	3 704.07	H	8.54	13.12	-48.62	-53.20	-13.00	40.20
	5 557.13	V	10.52	16.44	-47.38	-53.30	-13.00	40.30
	7 409.55	V	12.01	19.31	-41.70	-49.00	-13.00	36.00
	9 262.61	H	13.45	21.17	-37.78	-45.50	-13.00	32.50

Test mode : WCDMA 1900

Frequency(MHz) : 1 880.0

Channel : 9400

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
RMC	3 760.88	V	8.61	13.34	-48.97	-53.70	-13.00	40.70
	5 640.11	H	10.56	16.30	-46.56	-52.30	-13.00	39.30
	7 521.89	V	12.12	19.04	-43.48	-50.40	-13.00	37.40
	9 398.57	H	13.48	21.55	-38.83	-46.90	-13.00	33.90

Test mode : WCDMA 1900

Frequency(MHz) : 1 907.6

Channel : 9538

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
RMC	3 814.50	H	8.68	13.25	-51.63	-56.20	-13.00	43.20
	5 722.46	V	10.59	16.61	-45.28	-51.30	-13.00	38.30
	7 630.41	V	12.23	19.44	-42.49	-49.70	-13.00	36.70
	9 538.36	H	13.48	21.54	-38.24	-46.30	-13.00	33.30

Note.

1. E.I.R.P(dBm) = Substitute Level(dB) + Antenna gain(dBi) - C.L(Cable loss) (dB)

Test mode : LTE B2

Frequency(MHz) : 1 850.7

Channel : 18607

Bandwidth(MHz) : 1.4

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	3 701.25	V	8.54	13.11	-49.23	-53.80	-13.00	40.80
	5 550.00	H	10.52	16.43	-48.29	-54.20	-13.00	41.20
	7 400.25	V	12.00	19.30	-43.40	-50.70	-13.00	37.70
	9 249.00	H	13.45	21.15	-38.10	-45.80	-13.00	32.80

Test mode : LTE B2

Frequency(MHz) : 1 880

Channel : 18900

Bandwidth(MHz) : 1.4

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	3 760.50	V	8.61	13.34	-50.57	-55.30	-13.00	42.30
	5 643.00	V	10.56	16.31	-45.45	-51.20	-13.00	38.20
	7 518.75	H	12.12	19.03	-43.29	-50.20	-13.00	37.20
	9 398.25	V	13.48	21.55	-40.03	-48.10	-13.00	35.10

Test mode : LTE B2

Frequency(MHz) : 1 909.3

Channel : 19193

Bandwidth(MHz) : 1.4

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	3817.5	H	8.68	13.26	-52.82	-57.40	-13.00	44.40
	5 724.75	V	10.59	16.62	-45.07	-51.10	-13.00	38.10
	7 635.75	H	12.24	19.45	-40.99	-48.20	-13.00	35.20
	9 543.00	V	13.47	21.54	-38.23	-46.30	-13.00	33.30

Note.

E.I.R.P(dBm) = Substitute Level(dB) + Antenna gain(dBi) - C.L(Cable loss) (dB)

8. Measurement equipment

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
Spectrum Analyzer	R&S	FSV30	100914	26.06.30
Spectrum Analyzer	R&S	FSV40-N	101462	25.10.10
PXA Signal Analyzer	KEYSIGHT	N9040B	US56050101	25.12.03
PXA Signal Analyzer	KEYSIGHT	N9040B	US55230151	26.07.01
Signal Generator	R&S	SMB100A	176206	26.01.17
Vector Signal Generator	R&S	SMBV100A	257566	26.07.01
Wideband Radio Communication Tester	R&S	CMW500	106840	26.01.17
Wideband Radio Communication Tester	R&S	CMW500	141780	26.01.16
Broadband Resistive Power Divider	WEINSCHEL	WA1575	3750	25.10.10
DC Power Supply	TOYOTECH	TL305TP	20100121	26.06.30
DC Power Supply	AGILENT	E3632A	MY51220373	26.06.30
Temp & Humid Chamber	ESPEC CORP.	SH-661	92004048	25.10.10
Temp & Humid Chamber	Myeongseong R&P	CTHC-50P-DT	20150824-1	25.10.10
Bi-log Antenna	Teseq GmbH	CBL 6112D	62027	26.10.17
Bi-log Antenna	ETS-LINDGREN	3143B	00228420	27.07.03
Horn Antenna	ETS-LINDGREN	3117	00251528	26.01.21
Horn Antenna	ETS-LINDGREN	3117	00246058	26.01.21
Horn Antenna	ETS-LINDGREN	3116C	00251516	26.01.20
Horn Antenna	ETS-LINDGREN	3116	00086635	26.01.21
Amplifier	SONOMA INSTRUMENT	310N	421822	25.10.10
Amplifier	B&Z Technologies	BZR-0050400-551028-252525	27736	26.04.30
High pass Filter	Wainwright Instruments GmbH	WHKX3.0/18G-12SS	44	26.01.16

End of test report