TEST REPORT

FCC DTS Test for SM-X400
Certification

APPLICANT
SAMSUNG Electronics Co., Ltd.

REPORT NO.
HCT-RF-2506-FC097

DATE OF ISSUE
June 25, 2025

Tested by
Sang Hoon Lee

Technical Manager
Jong Seok Lee

HCT CO., LTD.
BongJai Huh / CEO

The report shall not be (partly) reproduced except in full without approval of the laboratory.
HCT CO., LTD. 2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea Tel. +82 31 645 6300 Fax. +82 31 645 6401

HCT CO.,LTD.
2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Tel. +82 31 645 6300 Fax. +82 31 645 6401

TEST REPORT

REPORT NO.
HCT-RF-2506-FC097

DATE OF ISSUE
June 25, 2025

Applicant	SAMSUNG Electronics Co., Ltd. 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
Product Name Model Name	Tablet SM-X400
FCC ID	A3LSMX400
Date of Test	May 7, 2025 ~ June 19, 2025
FCC Classification	Digital Transmission System(DTS)
Test Standard Used	FCC Rule Part(s): Part 15.247
Test Results	PASS
Location of Test	■ Permanent Testing Lab ☐ On Site Testing Lab (Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

The report shall not be (partly) reproduced except in full without approval of the laboratory.

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	June 25, 2025	Initial Release

Notice

Content
Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance. The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated. The test results have only been applied with the test methods required by the standard(s). When confirmation of authenticity of this test report is required, please contact www.hct.co.kr The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA). Data referencing: DTS Report (FCC ID: A3LSMX406B, Report No. HCT-RF-2506-FC089)

The report shall not be (partly) reproduced except in full without approval of the laboratory.

CONTENTS

1. EUT DESCRIPTION 5
ANTENNA CONFIGURATIONS 6
2. TEST METHODOLOGY 8
EUT CONFIGURATION 8
EUT EXERCISE 8
GENERAL TEST PROCEDURES 8
DESCRIPTION OF TEST MODES 9
3. INSTRUMENT CALIBRATION 9
4. FACILITIES AND ACCREDITATIONS 9
FACILITIES 9
EQUIPMENT 9
5. ANTENNA REQUIREMENTS 10
6. MEASUREMENT UNCERTAINTY 10
7. DESCRIPTION OF TESTS 11
8. SUMMARY TEST OF RESULTS & DATA REFERENCING 27
9. TEST RESULT 29
9.1 DUTY CYCLE 29
9.2 6 dB BANDWIDTH 32
9.3 OUTPUT POWER 36
9.4 POWER SPECTRAL DENSITY 40
9.5 BAND EDGE / CONDUCTED SPURIOUS EMISSIONS 44
9.6 RADIATED SPURIOUS EMISSIONS 50
9.7 RADIATED RESTRICTED BAND EDGES 53
9.8 POWERLINE CONDUCTED EMISSIONS 58
10. LIST OF TEST EQUIPMENT 59
11. ANNEX A_ TEST SETUP PHOTO 61

The report shall not be (partly) reproduced except in full without approval of the laboratory.

1. EUT DESCRIPTION

Model	SM-X400		
Additional Model	-		
EUT Type	Tablet		
Power Supply	DC 3.86 V		
Frequency Range	2 412 MHz ~ 2 472 MHz		
Max. RF Output Power	Average Power	SISO (Ant.1) : MIMO (Ant.1+ Ant.2) :	18.49 dBm 21.23 dBm
	Peak Power	SISO (Ant.1) : MIMO (Ant.1+ Ant.2) :	23.06 dBm 25.79 dBm
Modulation Type	DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n, 802.11ac		
Number of Channels	13 Channels		
Antenna Specification	Type: Metal		
Serial number	Conducted : R32Y40015BR Radiated : R32Y40010ZK		

The report shall not be (partly) reproduced except in full without approval of the laboratory.

ANTENNA CONFIGURATIONS

1. Antenna configuration

Configurations	SISO		MIMO	
	Ant.1	Ant.2	CDD	SDM
802.11b	O	X	O	X
802.11g	O	X	O	X
802.11n(HT20)	O	X	X	O
802.11ac(VHT20)	O	X	X	O

Note:

(1) O = Support, X = Not Support

(2) SISO = Single Input Single Output

(3) SDM = Spatial Diversity Multiplexing

(4) CDD = Cyclic Delay Diversity

2.This device supports simultaneous transmission operation, which allows for two channels to operate independent of one another in the 2.4 GHz and 5 GHz bands simultaneously on each antenna.

Simultaneous transmission Scenario	5 GHz WiFi Ant.1	5 GHz WiFi Ant.2	BT	Test Case
Bluetooth + 5 GHz WiFi MIMO	on	on	on	Scenario1

The report shall not be (partly) reproduced except in full without approval of the laboratory.

3. Directional Gain Calculation

According to KDB 662911 D01 Multiple Transmitter Output v02r01 F) 2) e) (iii), f) ii)

$$\text{Directional Gain(CDD)} = 10 \cdot \log\left[\frac{\sum_{j=1}^{N_{SS}}\{\sum_{k=1}^{N_{ANT}} g_{j,k}\}^2}{N_{ANT}}\right]$$

Directional gain(SDM) = Gmax + 10·LOG(N_{ANT}/ N_{ss})

Ant Gain (dBi)		N_{ANT}/ N_{ss}	Directional Gain (dBi)	
			CDD	SDM
ANT.1	-4.10	2/2	-1.19	-4.10
ANT.2	-4.30			

Note

According to ANSI C63.10-2013 section 14.4.3, the directional gain is calculated using the formula, where G_N is the gain of the nth antenna and N_{ANT} is the total number of antennas used.

Directional gain(CDD) = 10·log(((10$^{(ANT.0\ Gain/20)}$+10$^{(ANT.1\ Gain/20)}$)^2)/2) dBi

Directional gain(SDM) = Gmax + 10·log(N_{ANT}/ N_{ss})

Sample MIMO Calculation:

Ex) ANT.1 : 11.58 dBm ANT.2 : 12.08 dBm

MIMO = ANT.1 + ANT.2

(11.58 dBm + 12.08 dBm) = (14.387 mW + 16.143 mW) = 30.53 mW = 14.88 dBm

The report shall not be (partly) reproduced except in full without approval of the laboratory.

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled "guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) 'the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices'.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

The report shall not be (partly) reproduced except in full without approval of the laboratory.

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.
Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.
Detailed description of test facility was submitted to the Commission and accepted dated March 11, 2024 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.
All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

The report shall not be (partly) reproduced except in full without approval of the laboratory.

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

(1) The antennas of this E.U.T are permanently attached.

(2) The E.U.T Complies with the requirement of § 15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (±kHz)
X dB, 99% Bandwidth	95 (Confidence level about 95 %, *k=2*)
Frequency stability	28 (Confidence level about 95 %, *k=2*)


Parameter	Expanded Uncertainty (±dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.54 (Confidence level about 95 %, *k=2*)
Conducted Output Power(Power Meter)	0.54 (Confidence level about 95 %, k=2)
Conducted Output Power(Signal Analyzer)	0.68 (Confidence level about 95 %, k=2)
Power Spectral Density	1.03 (Confidence level about 95 %, k=2)
Band Edge (Out of Band Emissions)	0.70 (Confidence level about 95 %, k=2)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, *k*=2)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.68 (Confidence level about 95 %, *k*=2)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.75 (Confidence level about 95 %, *k*=2)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.82 (Confidence level about 95 %, *k*=2)
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, *k=2*)

The report shall not be (partly) reproduced except in full without approval of the laboratory.

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

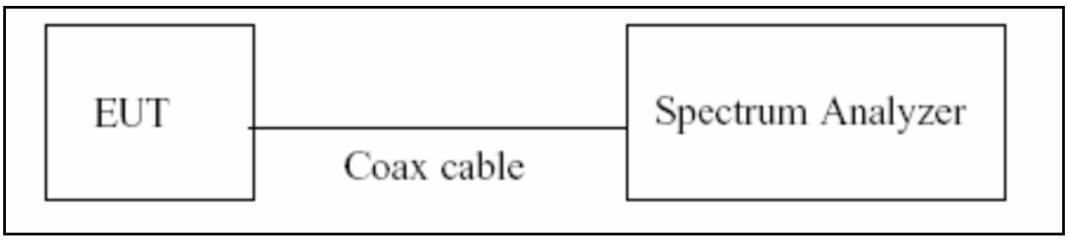

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if T ≤ 6.25 microseconds. (50/6.25 = 8)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are > 50/*T*.

1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz or 50 MHz (≥ RBW)
3. SPAN = 0 Hz
4. Detector = Average
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = 10log(1/Duty Cycle)


The report shall not be (partly) reproduced except in full without approval of the laboratory.

7.2. 6 dB Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration

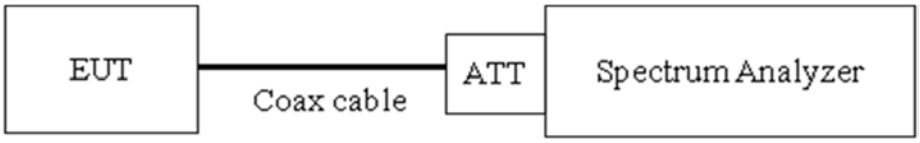

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

1) RBW = 100 kHz
2) VBW ≥ 3 x RBW
3) Detector = Peak
4) Trace mode = max hold
5) Sweep = auto couple
6) Allow the trace to stabilize
7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.


The report shall not be (partly) reproduced except in full without approval of the laboratory.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration

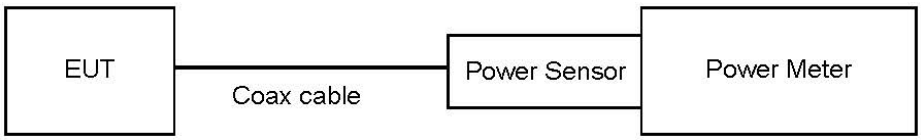

Test Procedure

The transmitter output is connected to the Power Meter.

▪ Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
: Measure the peak power of the transmitter.

▪ Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)

1) Measure the duty cycle.
2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3) Add 10 log (1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation

▪ Conducted Output Power(Peak) = Measured Value + ATT loss + Cable loss
▪ Conducted Output Power(Average) = Measured Value + ATT loss + Cable loss + Duty Cycle Factor


The report shall not be (partly) reproduced except in full without approval of the laboratory.

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8 dBm in any 3 kHz BW.

Test Configuration

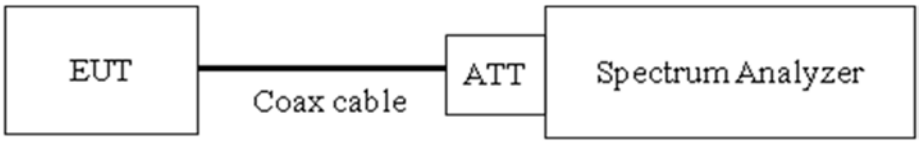

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

1) Set analyzer center frequency to DTS channel center frequency.
2) Set span to at least 1.5 times the OBW.
3) RBW = 3 kHz ≤ RBW ≤ 100 kHz.
4) VBW ≥ 3 x RBW.
5) Sweep = auto couple
6) Detector = power averaging (rms) or sample detector (when rms not available).
7) Ensure that the number of measurement points in the sweep ≥ [2 × span / RBW].
8) Employ trace averaging (rms) mode over a minimum of 100 traces
9) Use the peak marker function to determine the maximum amplitude level.
10) Use the peak marker function to determine the maximum amplitude level within the RBW.
    If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11) if then duty factor shall be added to adjust the result if the duty cycle is less than 98 %

Sample Calculation

▪ Power Spectral Density = Measured Value + ATT loss + Cable loss + Duty Cycle Factor

The report shall not be (partly) reproduced except in full without approval of the laboratory.


7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (Average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 30 dBc]

Test Configuration

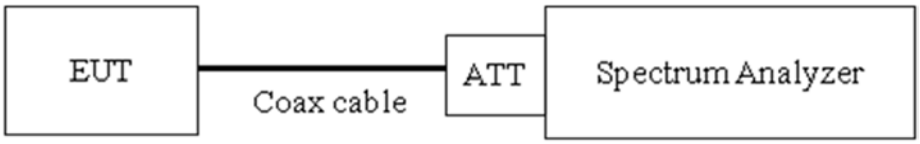

Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

1) RBW = 100 kHz
2) VBW ≥ 3 x RBW
3) Set span to encompass the spectrum to be examined
4) Detector = Peak
5) Trace Mode = max hold
6) Sweep time = auto couple
7) Allow trace to fully stabilize.
8) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

The report shall not be (partly) reproduced except in full without approval of the laboratory.

Factors for frequency

Freq(MHz)	Factor(dB)
30	20.06
100	20.14
200	20.17
300	20.21
400	20.28
500	20.28
600	20.28
700	20.28
800	20.30
900	20.31
1000	20.35
2000	20.55
2400	20.62
3000	20.67
4000	20.74
5000	20.86
5850	20.84
6000	20.83
7000	20.93
8000	20.97
9000	21.09
10000	21.18
11000	21.27
12000	21.33
13000	21.33
14000	21.40
15000	21.49
16000	21.52
17000	21.55
18000	21.63
19000	21.65
20000	21.66
21000	21.76
22000	21.82
23000	21.86
24000	21.90
25000	21.92

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss

3. EUT cable loss = 0.68 dB

4. Total Port offset = 21.30 dB

The report shall not be (partly) reproduced except in full without approval of the laboratory.


7.6. Radiated Test

Limit

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Test Configuration

Below 30 MHz

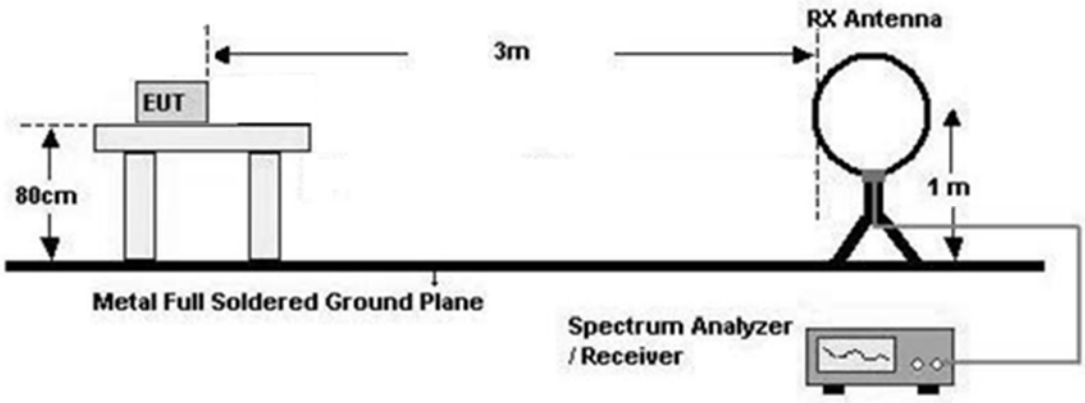


The report shall not be (partly) reproduced except in full without approval of the laboratory.

30 MHz - 1 GHz

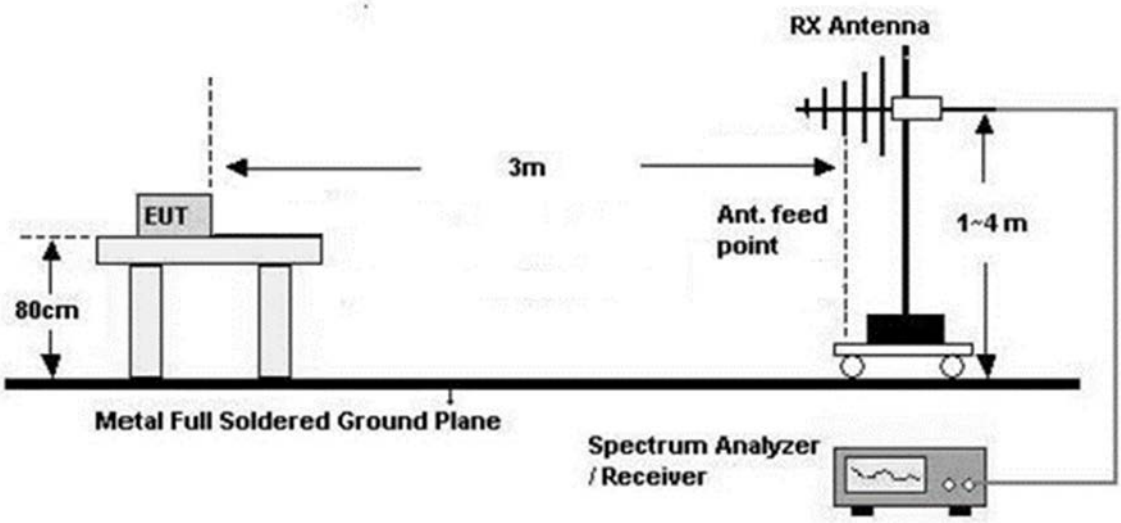

Above 1 GHz

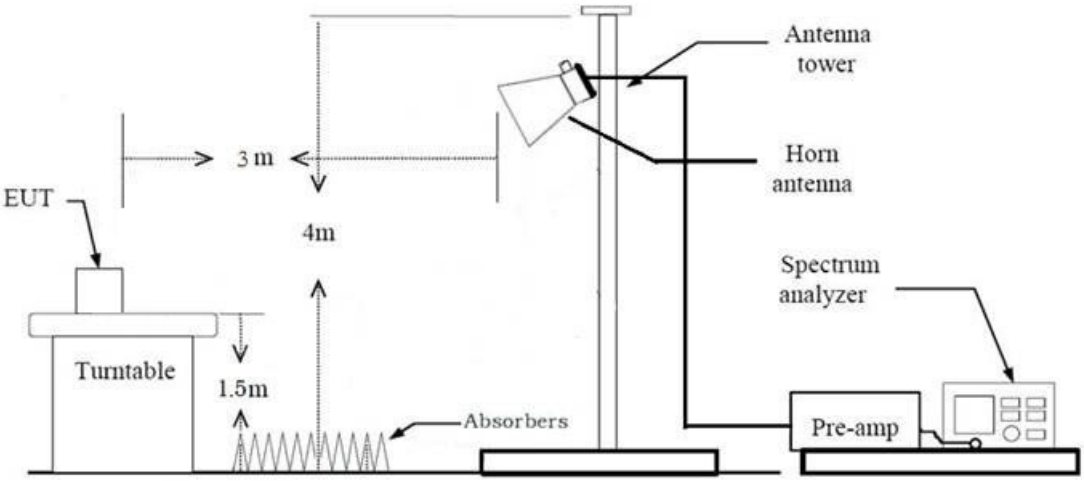

The report shall not be (partly) reproduced except in full without approval of the laboratory.

Test Procedure of Radiated spurious emissions (Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = 40log(3 m/300 m) = - 80 dB
   Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = 40log(3 m/30 m) = - 40 dB
   Measurement Distance : 3 m
8. Spectrum Setting
   - Frequency Range = 9 kHz ~ 30 MHz
   - Detector = Peak
   - Trace = Max hold
   - RBW = 9 kHz
   - VBW ≥ 3 x RBW
9. Total = Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

The report shall not be (partly) reproduced except in full without approval of the laboratory.

Test Procedure of Radiated spurious emissions (Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
   (1) Measurement Type(Peak):
      - Measured Frequency Range : 30 MHz – 1 GHz
      - Detector = Peak
      - Trace = Max hold
      - RBW = 100 kHz
      - VBW ≥ 3 x RBW
   (2) Measurement Type(Quasi-peak):
      - Measured Frequency Range : 30 MHz – 1 GHz
      - Detector = Quasi-Peak
      - RBW = 120 kHz

   In general, (1) is used mainly
7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)
   (1) Measurement Type(Peak):
      - Measured Frequency Range : 1 GHz – 25 GHz

The report shall not be (partly) reproduced except in full without approval of the laboratory.

- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW ≥ 3 x RBW

(2) Measurement Type(Average): Duty cycle ≥ 98 %

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW ≥ 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle < 98 %, duty cycle variations are less than ±2 %

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW ≥ 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Distance extrapolation factor = 20log (test distance / specific distance) (dB)
11. Total(Measurement Type : Peak)
= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle ≥ 98 %)
= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98 %)
= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F) + Duty Cycle Factor

The report shall not be (partly) reproduced except in full without approval of the laboratory.

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
   (1) Measurement Type(Peak):
      - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
      - Detector = Peak
      - Trace = Maxhold
      - RBW = 1 MHz
      - VBW ≥ 3 x RBW
   (2) Measurement Type(Average): Duty cycle ≥ 98 %,
      - Measured Frequency Range : 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
      - Detector = RMS
      - Averaging type = power (*i.e.*, RMS)
      - RBW = 1 MHz
      - VBW ≥ 3 x RBW
      - Sweep time = auto.
      - Trace mode = average (at least 100 traces).
   (3) Measurement Type(Average): Duty cycle < 98 %, duty cycle variations are less than ±2 %
      - Measured Frequency Range : 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
      - Detector = RMS
      - Averaging type = power (*i.e.*, RMS)
      - RBW = 1 MHz
      - VBW ≥ 3 x RBW
      - Sweep time = auto.
      - Trace mode = average (at least 100 traces).
      - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.

The report shall not be (partly) reproduced except in full without approval of the laboratory.

- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Distance extrapolation factor = 20log (test distance / specific distance) (dB)
11. Total (Measurement Type : Peak)
    = Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
    Total(Measurement Type : Average, Duty cycle ≥ 98 %)
    = Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
    Total(Measurement Type : Average, Duty cycle < 98 %)
    = Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) + Duty Cycle Factor

The report shall not be (partly) reproduced except in full without approval of the laboratory.

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56[a]	56 to 46[a]
0.50 to 5	56	46
5 to 30	60	50

[a]Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

The report shall not be (partly) reproduced except in full without approval of the laboratory.

7.8. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
   - Mode : Stand alone, Stand alone + External accessories
   - Worstcase : Stand alone
2. All Antenna of operation were investigated and the worst case results are reported
   - Mode : SISO(Ant.1), MIMO_CDD(Ant.1+Ant.2), MIMO_SDM(Ant.1+Ant.2)
   - Worst case : MIMO_CDD(Ant.1+Ant.2), MIMO_SDM(Ant.1+Ant.2)
3. EUT Axis
   - Radiated Spurious Emissions : Z
   - Radiated Restricted Band Edge : Z
4. Duty cycle factor applies only 802.11g/n/ac (Duty cycle < 98 %).
5. All data rate of operation were investigated and the test results are worst case in lowest Data Rate of each mode.
   - 802.11b : 1 Mbps [SISO(Ant.1), MIMO_CDD(Ant.1+Ant.2)]
   - 802.11g : 6 Mbps [SISO(Ant.1), MIMO_CDD(Ant.1+Ant.2)]
   - 802.11n(HT20): MCS 0 [SISO(Ant.1)], MCS 8 [MIMO_SDM(Ant.1+Ant.2)]
   - 802.11ac(VHT20): MCS 0 [SISO(Ant.1), MIMO_SDM(Ant.1+Ant.2)]
   - Worst case : MIMO (Ant.1+Ant.2)
6. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
   - Position : Horizontal, Vertical, Parallel to the ground plane
7. Radiated Spurious Emission
   - All mode of operation were investigated and the worst case results are reported.
   - 802.11b : 1 Mbps [SISO(Ant.1), MIMO_CDD(Ant.1+Ant.2)]
   - 802.11g : 6 Mbps [SISO(Ant.1), MIMO_CDD(Ant.1+Ant.2)]
   - 802.11n(HT20): MCS 0 [SISO(Ant.1)], MCS 8 [MIMO_SDM(Ant.1+Ant.2)]
   - 802.11ac(VHT20): MCS 0 [SISO(Ant.1), MIMO_SDM(Ant.1+Ant.2)]
   - Worst case : 802.11b_1 Mbps [MIMO_CDD(Ant.1+Ant.2)]

The report shall not be (partly) reproduced except in full without approval of the laboratory.

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
   - Mode : Stand alone+ External accessories + Travel Adapter
     Stand alone + Travel Adapter
   - Worstcase : Stand alone + Travel Adapter

Radiated test(Simultaneous transmission Scenario)

1. Please refer to the [BT], [UNII ax] Test Report.

Conducted test

1. The EUT was configured with data rate of highest power.

The report shall not be (partly) reproduced except in full without approval of the laboratory.

8. SUMMARY TEST OF RESULTS & DATA REFERENCING

8.1. Test result

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§ 15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§ 15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§ 15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	§ 15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

Note. The decision rule applies 'simple acceptance'

The report shall not be (partly) reproduced except in full without approval of the laboratory.

8.2. Data Referencing

Equipment Class	Rule Part	Test item	Data Referencing	Comments
DTS (WLAN 2.4GHz)	15.247(a)(2)	6 dB Bandwidth	Y	-
	15.247(b)(3)	Conducted Maximum output power	Y	Spot-check
	15.247(e).	Power Spectral Density	Y	-
	15.247(d)	Band Edge (Out of Band Emissions)	Y	-
	15.207	AC Power line conducted Emissions	Y	-
	15.247(d) 15.205 15.209	Radiated Spurious Emissions	Y	Spot-check
	15.247(d) 15.205 15.209	Radiated Restricted Band Edge	Y	Spot-check

Spot-Check Result

1. Data was leveraged from model SM-X406B for the certification of SM-X400.
2. Please refer to the [FCC Evaluation] Report.

The report shall not be (partly) reproduced except in full without approval of the laboratory.

9. TEST RESULT

9.1 DUTY CYCLE

[SISO]

Mode	Data Rate	T_{on} (ms)	T_{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11b	1 Mbps	8.608	8.705	0.989	0.048
802.11g	6 Mbps	1.428	1.527	0.935	0.291
802.11n (HT20)	MCS0	1.337	1.435	0.931	0.310
802.11ac (VHT20)	MCS0	1.343	1.442	0.931	0.308

[MIMO (Ant.1+ Ant.2)]

Mode	Data Rate	T_{on} (ms)	T_{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11b	1 Mbps	8.608	8.705	0.989	0.048
802.11g	6 Mbps	1.428	1.527	0.935	0.291
802.11n (HT20)	MCS8	0.692	0.788	0.878	0.564
802.11ac (VHT20)	MCS0	0.696	0.792	0.879	0.561

Note:

In order to simplify the report, attached plots were only the lowest data rate.





The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ Test Plots

Note:

In order to simplify the report, attached plots were only the lowest data rate.


[SISO]

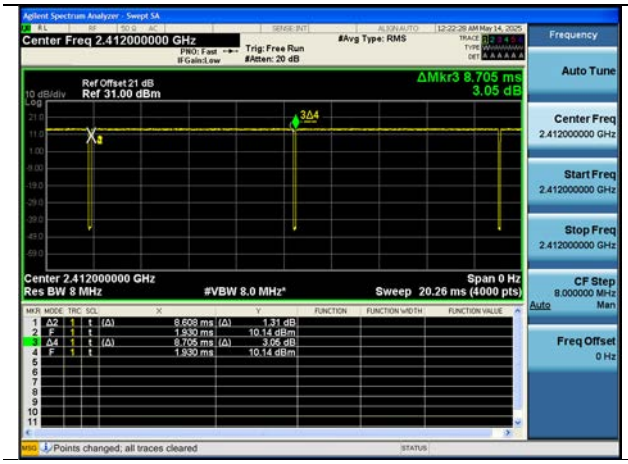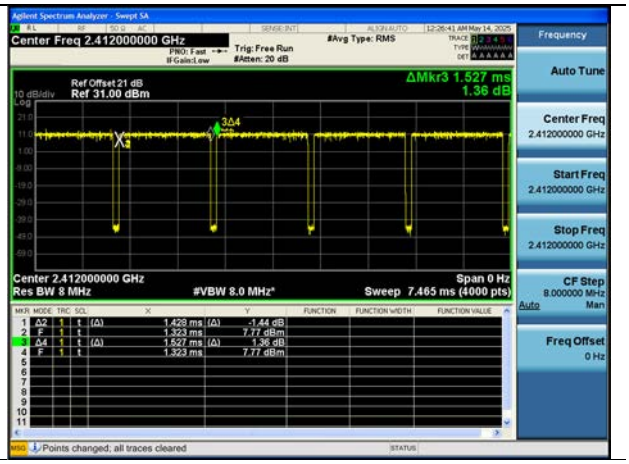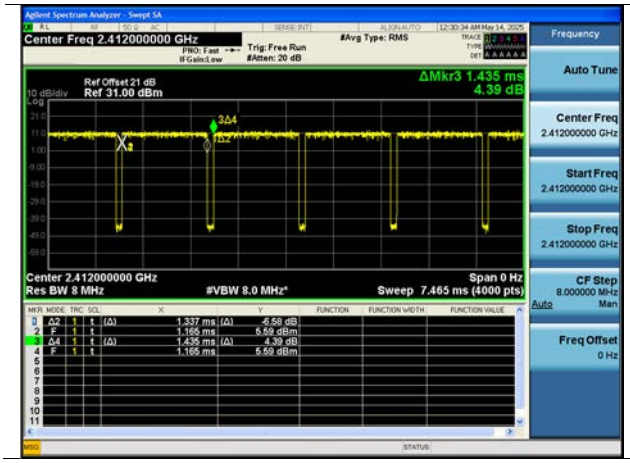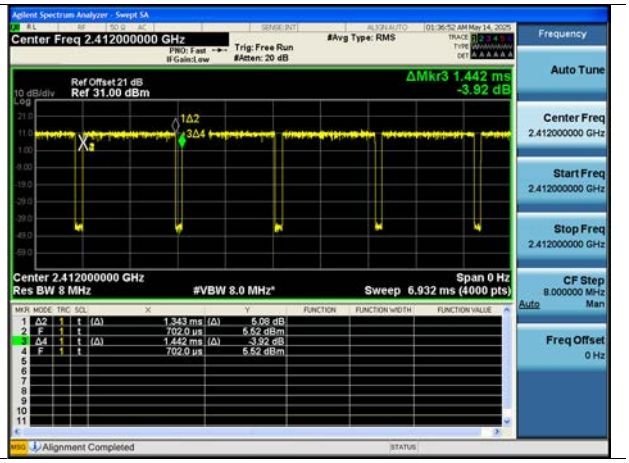802.11b (1 Mbps)	802.11g (6 Mbps)
	
802.11n (MCS0)	802.11ac (MCS0)
	


The report shall not be (partly) reproduced except in full without approval of the laboratory.

[MIMO (Ant.1+ Ant.2)]


802.11b (1 Mbps)

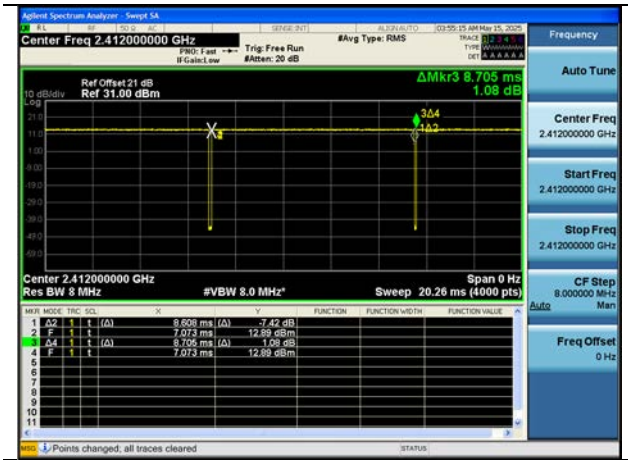


802.11g (6 Mbps)

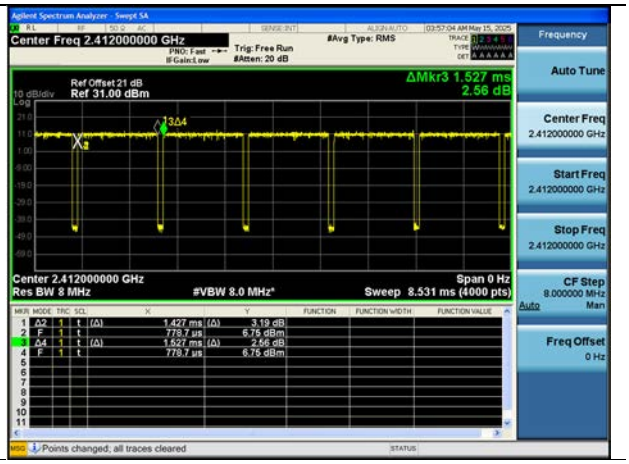

802.11n (MCS8)

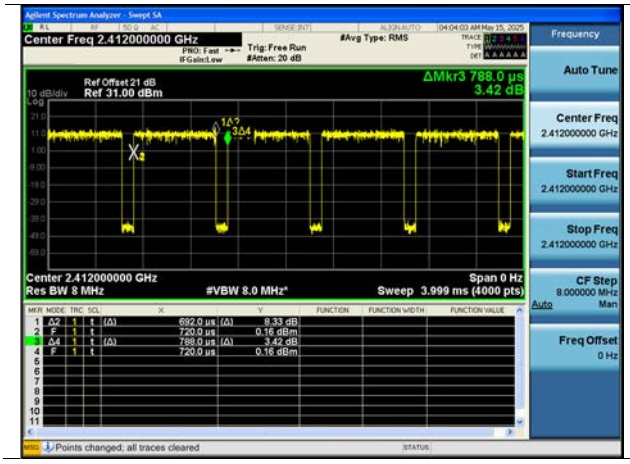

802.11ac (MCS0)

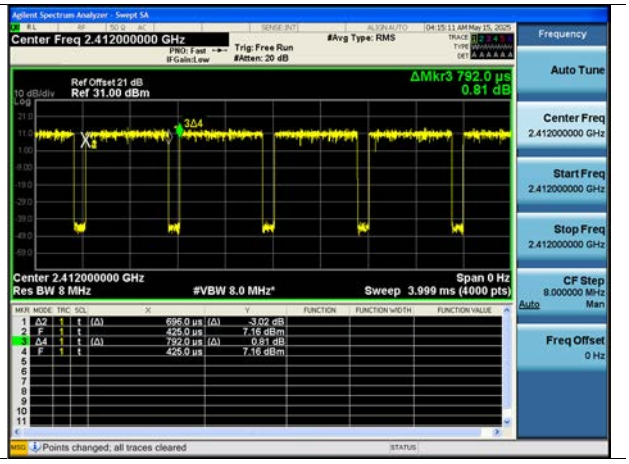

The report shall not be (partly) reproduced except in full without approval of the laboratory.

9.2 6 dB BANDWIDTH

[ANT. 1]

Mode	Frequency [MHz]	Channel No.	6dB Bandwidth [MHz]	Limit [MHz]
802.11b	2412	1	8.080	0.50
	2437	6	8.113	0.50
	2462	11	8.103	0.50
	2467	12	8.076	0.50
	2472	13	8.120	0.50
802.11g	2412	1	15.17	0.50
	2437	6	15.95	0.50
	2462	11	15.35	0.50
	2467	12	15.75	0.50
	2472	13	16.10	0.50
802.11n (HT20)	2412	1	15.17	0.50
	2437	6	16.94	0.50
	2462	11	15.74	0.50
	2467	12	16.15	0.50
	2472	13	17.35	0.50
802.11ac (VHT20)	2412	1	15.75	0.50
	2437	6	16.95	0.50
	2462	11	15.75	0.50
	2467	12	16.36	0.50
	2472	13	17.35	0.50

The report shall not be (partly) reproduced except in full without approval of the laboratory.

[ANT. 2]

Mode	Frequency [MHz]	Channel No.	6dB Bandwidth [MHz]	Limit [MHz]
802.11b	2412	1	8.104	0.50
	2437	6	8.109	0.50
	2462	11	8.102	0.50
	2467	12	8.100	0.50
	2472	13	8.097	0.50
802.11g	2412	1	15.73	0.50
	2437	6	16.08	0.50
	2462	11	15.52	0.50
	2467	12	15.49	0.50
	2472	13	15.38	0.50
802.11n (HT20)	2412	1	16.00	0.50
	2437	6	17.15	0.50
	2462	11	16.18	0.50
	2467	12	16.35	0.50
	2472	13	16.57	0.50
802.11ac (VHT20)	2412	1	16.07	0.50
	2437	6	17.18	0.50
	2462	11	16.56	0.50
	2467	12	16.35	0.50
	2472	13	16.56	0.50


The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ Test Plots


[ANT. 1]

Note: In order to simplify the report, attached plots were only the narrowest 6 dB BW channel


802.11b-CH 12

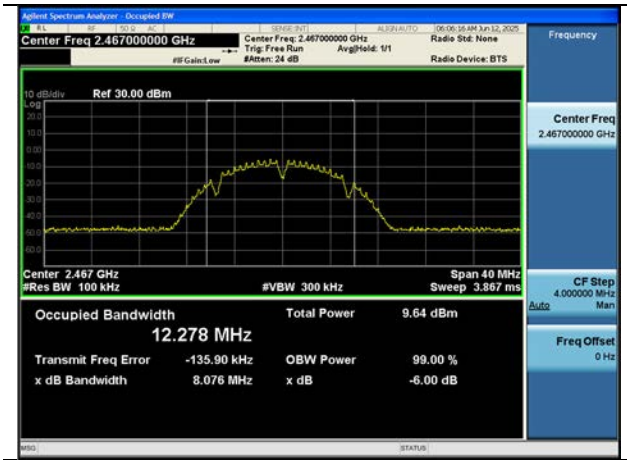


802.11g-CH 1

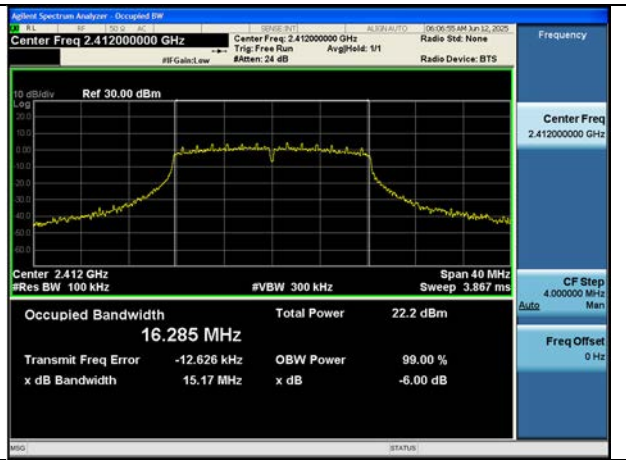

802.11n_HT20-CH 1

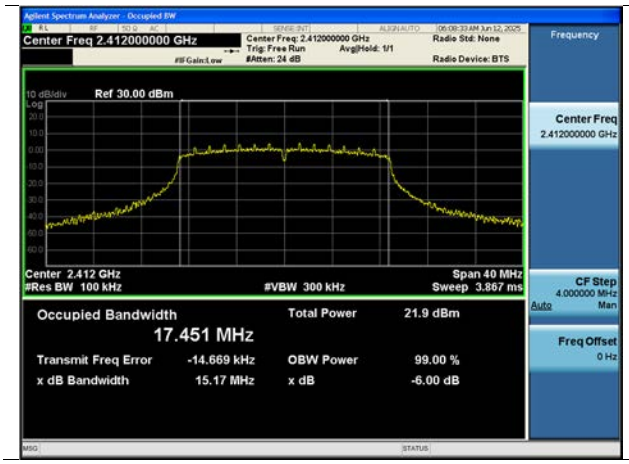

802.11ac_VHT20-CH 11

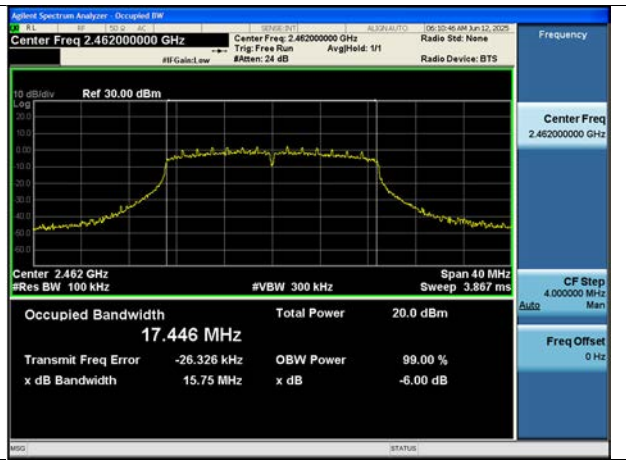


The report shall not be (partly) reproduced except in full without approval of the laboratory.


[ANT. 2]

Note: In order to simplify the report, attached plots were only the narrowest 6 dB BW channel

802.11b-CH 13

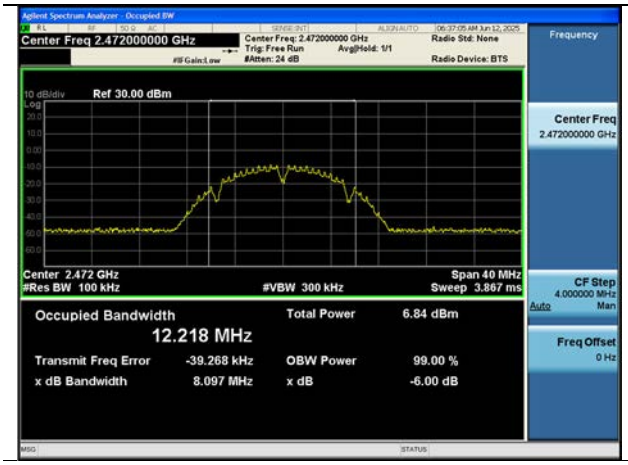


802.11g-CH 13

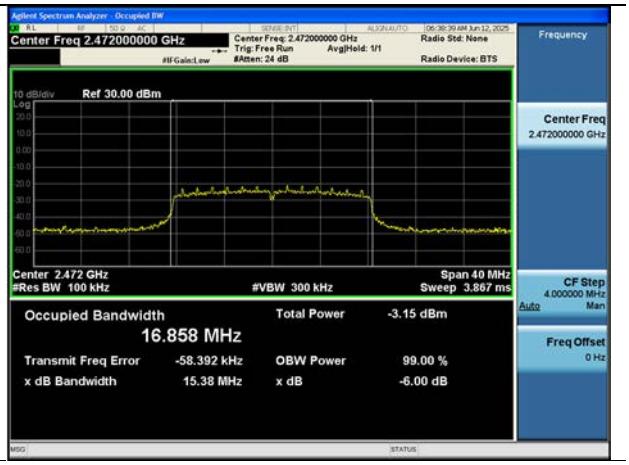

802.11n_HT20-CH 1



802.11ac_VHT20-CH 1

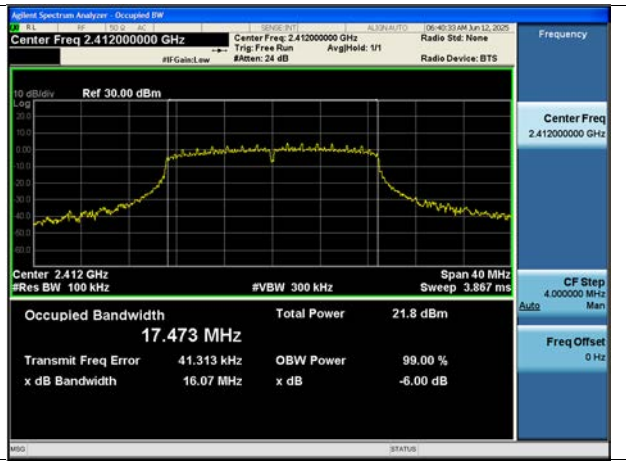

The report shall not be (partly) reproduced except in full without approval of the laboratory.

9.3 OUTPUT POWER

Note :

1. MIMO Power = 10•log((10^(Ant.1 power /10))+(10^(Ant.2 power /10)))

Peak Power

[SISO Ant.1]

Mode	Frequency [MHz]	Channel No.	Data Rate	Total Peak Power [dBm]	Limit [dBm]
802.11b	2412	1	1M	21.06	30
	2437	6	1M	21.29	30
	2462	11	1M	21.35	30
	2467	12	1M	5.07	30
	2472	13	1M	3.34	30
802.11g	2412	1	6M	23.06	30
	2437	6	6M	22.96	30
	2462	11	6M	20.83	30
	2467	12	6M	9.92	30
	2472	13	6M	-1.45	30
802.11n	2412	1	MCS0	22.89	30
	2437	6	MCS0	22.81	30
	2462	11	MCS0	20.68	30
	2467	12	MCS0	9.78	30
	2472	13	MCS0	-1.54	30
802.11ac	2412	1	MCS0	22.77	30
	2437	6	MCS0	22.72	30
	2462	11	MCS0	20.66	30
	2467	12	MCS0	9.78	30
	2472	13	MCS0	-1.54	30

The report shall not be (partly) reproduced except in full without approval of the laboratory.

[MIMO(Ant.1+Ant.2)]

Mode	Frequency [MHz]	Channel No.	Data Rate	Conducted Peak Power [dBm]			Limit [dBm]
				ANT1	ANT2	MIMO	
802.11b	2412	1	1M	21.21	20.57	23.91	30
	2437	6	1M	21.13	20.17	23.69	30
	2462	11	1M	21.24	21.02	24.14	30
	2467	12	1M	4.93	4.57	7.76	30
	2472	13	1M	3.26	2.66	5.98	30
802.11g	2412	1	6M	22.96	22.31	25.66	30
	2437	6	6M	22.92	22.08	25.53	30
	2462	11	6M	20.80	20.26	23.55	30
	2467	12	6M	9.87	9.36	12.63	30
	2472	13	6M	-1.42	-2.37	1.14	30
802.11n	2412	1	MCS8	22.45	22.63	25.55	30
	2437	6	MCS8	22.42	22.79	25.62	30
	2462	11	MCS8	20.22	20.44	23.34	30
	2467	12	MCS8	9.32	9.79	12.57	30
	2472	13	MCS8	-1.32	-2.51	1.14	30
802.11ac	2412	1	MCS0	22.91	22.64	25.79	30
	2437	6	MCS0	22.69	22.81	25.76	30
	2462	11	MCS0	20.66	20.70	23.69	30
	2467	12	MCS0	9.95	9.66	12.81	30
	2472	13	MCS0	-1.32	-1.84	1.44	30

The report shall not be (partly) reproduced except in full without approval of the laboratory.

Average Power

Note :

1. Total Power [dBm] = Measured Power [dBm] + Duty Cycle Factor [dB]

[SISO Ant.1]

Mode	Frequency [MHz]	Channel No.	Data Rate	Total Average Power [dBm]			Limit [dBm]
				Measured Value	D.C.F	Summed	
802.11b	2412	1	1M	18.14	0.05	18.19	30
	2437	6	1M	18.39	0.05	18.44	30
	2462	11	1M	18.44	0.05	18.49	30
	2467	12	1M	2.03	0.05	2.08	30
	2472	13	1M	0.31	0.05	0.36	30
802.11g	2412	1	6M	14.85	0.29	15.14	30
	2437	6	6M	14.80	0.29	15.09	30
	2462	11	6M	12.59	0.29	12.89	30
	2467	12	6M	1.68	0.29	1.98	30
	2472	13	6M	-9.74	0.29	-9.45	30
802.11n	2412	1	MCS0	14.66	0.31	14.97	30
	2437	6	MCS0	14.63	0.31	14.94	30
	2462	11	MCS0	12.43	0.31	12.74	30
	2467	12	MCS0	1.53	0.31	1.84	30
	2472	13	MCS0	-9.83	0.31	-9.52	30
802.11ac	2412	1	MCS0	14.58	0.31	14.89	30
	2437	6	MCS0	14.50	0.31	14.81	30
	2462	11	MCS0	12.43	0.31	12.74	30
	2467	12	MCS0	1.51	0.31	1.82	30
	2472	13	MCS0	-9.88	0.31	-9.57	30

The report shall not be (partly) reproduced except in full without approval of the laboratory.

[MIMO(Ant.1+Ant.2)]

Mode	Frequency [MHz]	Channel No.	Data Rate	Conducted Average Power [dBm]			Limit [dBm]
				ANT1	ANT2	MIMO	
802.11b	2412	1	1M	18.34	17.67	21.03	30
	2437	6	1M	18.26	17.30	20.81	30
	2462	11	1M	18.35	18.09	21.23	30
	2467	12	1M	1.91	1.54	4.74	30
	2472	13	1M	0.24	-0.41	2.94	30
802.11g	2412	1	6M	15.05	14.36	17.73	30
	2437	6	6M	15.04	14.15	17.63	30
	2462	11	6M	12.85	12.29	15.59	30
	2467	12	6M	1.94	1.36	4.67	30
	2472	13	6M	-9.42	-10.33	-6.84	30
802.11n	2412	1	MCS8	14.62	14.29	17.47	30
	2437	6	MCS8	14.54	14.54	17.55	30
	2462	11	MCS8	12.32	12.10	15.22	30
	2467	12	MCS8	1.38	1.38	4.39	30
	2472	13	MCS8	-9.32	-10.92	-7.04	30
802.11ac	2412	1	MCS0	15.04	14.30	17.69	30
	2437	6	MCS0	14.79	14.52	17.67	30
	2462	11	MCS0	12.75	12.30	15.54	30
	2467	12	MCS0	2.03	1.34	4.71	30
	2472	13	MCS0	-9.34	-10.21	-6.74	30

The report shall not be (partly) reproduced except in full without approval of the laboratory.

9.4 POWER SPECTRAL DENSITY

Note :

1. MIMO PSD = 10•log((10^(Ant.1 PSD /10))+(10^(Ant.2 PSD /10)))
2. Total PSD = Measured Value + Duty Cycle Factor

[SISO_Ant.1]

Mode	Frequency [MHz]	Channel No.	Data Rate	Total Power Spectral Density [dBm]			Limit
				Measured Value	D.C.F	Summed	
802.11b	2412	1	1M	-3.065	0.05	-3.017	8 dBm / 3 kHz
	2437	6	1M	-3.160	0.05	-3.112	
	2462	11	1M	-3.205	0.05	-3.157	
	2467	12	1M	-19.574	0.05	-19.526	
	2472	13	1M	-21.423	0.05	-21.375	
802.11g	2412	1	6M	-8.996	0.29	-8.705	
	2437	6	6M	-9.211	0.29	-8.920	
	2462	11	6M	-11.610	0.29	-11.319	
	2467	12	6M	-22.095	0.29	-21.804	
	2472	13	6M	-34.149	0.29	-33.858	
802.11n	2412	1	MCS0	-9.430	0.31	-9.120	
	2437	6	MCS0	-9.325	0.31	-9.015	
	2462	11	MCS0	-11.564	0.31	-11.254	
	2467	12	MCS0	-22.347	0.31	-22.037	
	2472	13	MCS0	-34.244	0.31	-33.934	
802.11ac	2412	1	MCS0	-9.467	0.31	-9.159	
	2437	6	MCS0	-9.932	0.31	-9.624	
	2462	11	MCS0	-11.119	0.31	-10.811	
	2467	12	MCS0	-22.363	0.31	-22.055	
	2472	13	MCS0	-34.205	0.31	-33.897	

The report shall not be (partly) reproduced except in full without approval of the laboratory.

[MIMO(Ant.1+Ant.2)]

BW	Frequency [MHz]	Channel No.	Data Rate	Power Spectral Density [dBm]			Limit
				ANT1	ANT2	MIMO	
802.11b	2412	1	1M	-3.141	-4.015	-0.545	8 dBm / 3 kHz
	2437	6	1M	-3.338	-4.216	-0.744	
	2462	11	1M	-2.592	-3.280	0.088	
	2467	12	1M	-19.002	-19.748	-16.348	
	2472	13	1M	-20.701	-21.750	-18.183	
802.11g	2412	1	6M	-8.781	-9.361	-6.051	
	2437	6	6M	-9.415	-10.351	-6.848	
	2462	11	6M	-10.814	-11.833	-8.283	
	2467	12	6M	-21.262	-22.624	-18.880	
	2472	13	6M	-32.727	-34.327	-30.444	
802.11n	2412	1	MCS0	-8.749	-8.619	-5.673	
	2437	6	MCS0	-9.704	-8.977	-6.315	
	2462	11	MCS0	-10.879	-11.522	-8.178	
	2467	12	MCS0	-21.917	-22.601	-19.235	
	2472	13	MCS0	-33.451	-32.651	-30.022	
802.11ac	2412	1	MCS0	-8.967	-8.604	-5.771	
	2437	6	MCS0	-9.572	-9.790	-6.669	
	2462	11	MCS0	-10.960	-11.676	-8.293	
	2467	12	MCS0	-22.219	-22.111	-19.154	
	2472	13	MCS0	-34.003	-34.888	-31.413	

The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ Test Plots



Note : In order to simplify the report, attached plots were only the worst case PSD channel.



[MIMO(Ant.1+Ant.2)]

Power Spectral Density (802.11b-CH 11)	
ANT. 1	ANT. 2
	

Power Spectral Density (802.11g-CH 1)	
ANT. 1	ANT. 2
	

The report shall not be (partly) reproduced except in full without approval of the laboratory.

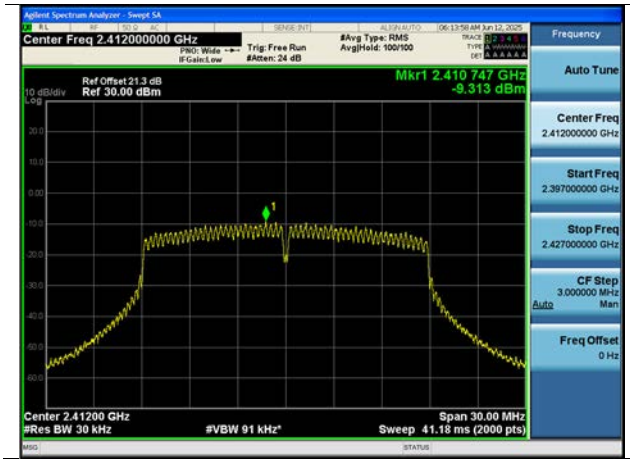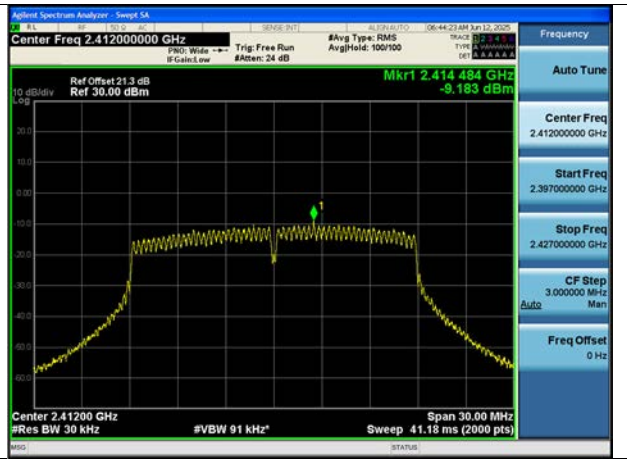Power Spectral Density (802.11n-CH 1)	
ANT. 1	ANT. 2
	

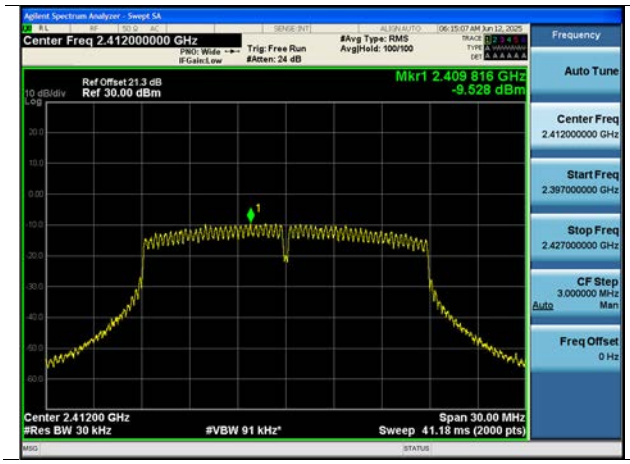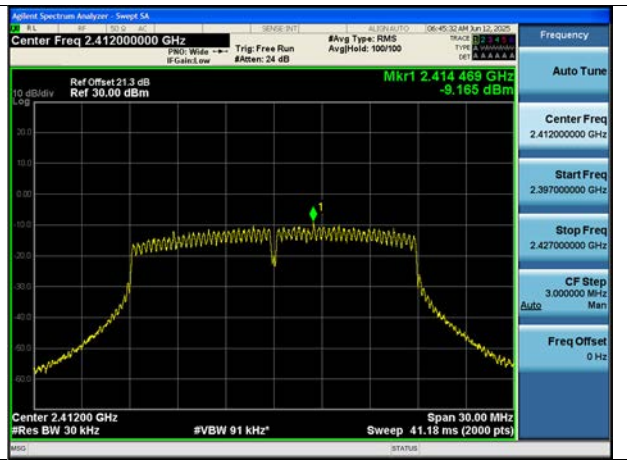Power Spectral Density (802.11ac-CH 1)	
ANT. 1	ANT. 2
	

The report shall not be (partly) reproduced except in full without approval of the laboratory.

9.5 BAND EDGE / CONDUCTED SPURIOUS EMISSIONS

Limit : 30 dBc

Band Edge

[ANT. 1]

Mode	Freq. [MHz]	CH.	Measured Position	Band edge[dB]
802.11b	2 412	1	Lowest Bandedge	55.702
	2 462	11	Highest Bandedge	59.064
	2 467	12	Highest Bandedge	50.493
	2 472	13	Highest Bandedge	49.673
802.11g	2 412	1	Lowest Bandedge	36.240
	2 462	11	Highest Bandedge	52.046
	2 467	12	Highest Bandedge	47.876
	2 472	13	Highest Bandedge	32.640
802.11n	2 412	1	Lowest Bandedge	35.054
	2 462	11	Highest Bandedge	53.958
	2 467	12	Highest Bandedge	47.173
	2 472	13	Highest Bandedge	32.752
802.11ac	2 412	1	Lowest Bandedge	34.318
	2 462	11	Highest Bandedge	52.973
	2 467	12	Highest Bandedge	47.418
	2 472	13	Highest Bandedge	30.904

The report shall not be (partly) reproduced except in full without approval of the laboratory.

[ANT. 2]

Mode	Freq. [MHz]	CH.	Measured Position	Band edge[dB]
802.11b	2 412	1	Lowest Bandedge	57.367
	2 462	11	Highest Bandedge	60.134
	2 467	12	Highest Bandedge	52.493
	2 472	13	Highest Bandedge	47.599
802.11g	2 412	1	Lowest Bandedge	38.241
	2 462	11	Highest Bandedge	55.381
	2 467	12	Highest Bandedge	49.888
	2 472	13	Highest Bandedge	34.486
802.11n	2 412	1	Lowest Bandedge	38.105
	2 462	11	Highest Bandedge	54.439
	2 467	12	Highest Bandedge	49.318
	2 472	13	Highest Bandedge	34.730
802.11ac	2 412	1	Lowest Bandedge	36.559
	2 462	11	Highest Bandedge	53.497
	2 467	12	Highest Bandedge	49.869
	2 472	13	Highest Bandedge	33.294

The report shall not be (partly) reproduced except in full without approval of the laboratory.

Conducted Spurious Emission

[ANT. 1]

Mode	Frequency [MHz]	Channel No.	Data Rate	Conducted Spurious Emission [dBc]
802.11b	2412	1	1M	58.501
	2437	6	1M	59.376
	2462	11	1M	58.556
	2467	12	1M	48.906
	2472	13	1M	47.002
802.11g	2412	1	6M	53.525
	2437	6	6M	50.219
	2462	11	6M	48.997
	2467	12	6M	44.994
	2472	13	6M	34.663
802.11n HT20	2412	1	MCS8	50.304
	2437	6	MCS8	51.411
	2462	11	MCS8	49.692
	2467	12	MCS8	46.355
	2472	13	MCS8	32.808
802.11ac VHT20	2412	1	MCS0	52.029
	2437	6	MCS0	52.807
	2462	11	MCS0	51.301
	2467	12	MCS0	45.947
	2472	13	MCS0	34.712

The report shall not be (partly) reproduced except in full without approval of the laboratory.

[ANT. 2]


Mode	Frequency [MHz]	Channel No.	Data Rate	Conducted Spurious Emission [dBc]
802.11b	2412	1	1M	58.711
	2437	6	1M	58.478
	2462	11	1M	57.337
	2467	12	1M	48.442
	2472	13	1M	46.149
802.11g	2412	1	6M	49.881
	2437	6	6M	52.131
	2462	11	6M	49.088
	2467	12	6M	45.608
	2472	13	6M	31.464
802.11n HT20	2412	1	MCS8	50.954
	2437	6	MCS8	50.504
	2462	11	MCS8	51.476
	2467	12	MCS8	44.199
	2472	13	MCS8	34.316
802.11ac VHT20	2412	1	MCS0	52.951
	2437	6	MCS0	52.549
	2462	11	MCS0	48.916
	2467	12	MCS0	45.208
	2472	13	MCS0	34.500

The report shall not be (partly) reproduced except in full without approval of the laboratory.


▣ Test Plots (Band Edge)

Note: In order to simplify the report, attached plots were only the worst case.

[ANT. 1] 802.11ac - CH 13

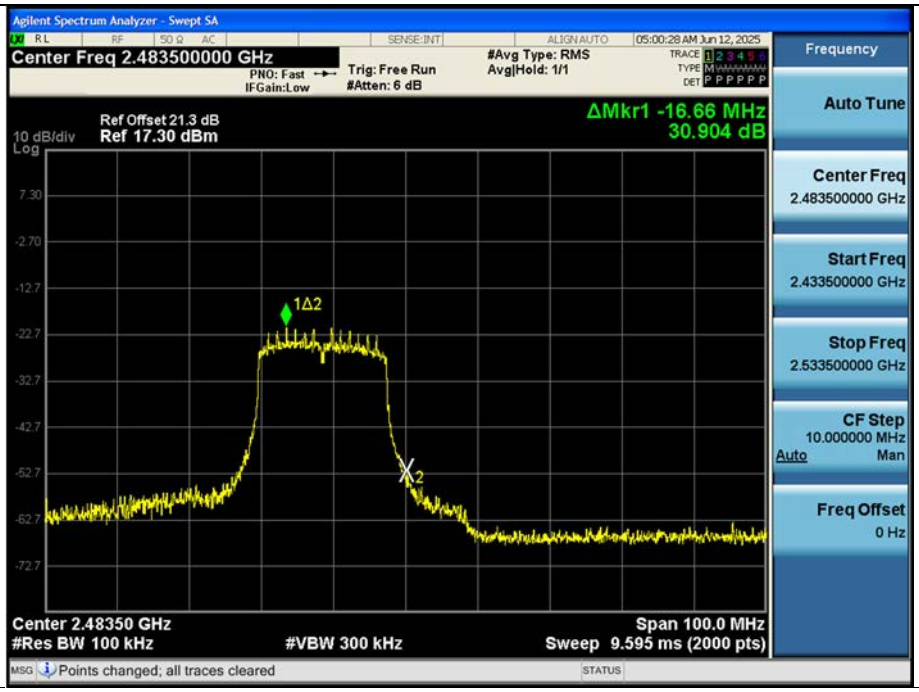

[ANT. 2] 802.11ac - CH 13

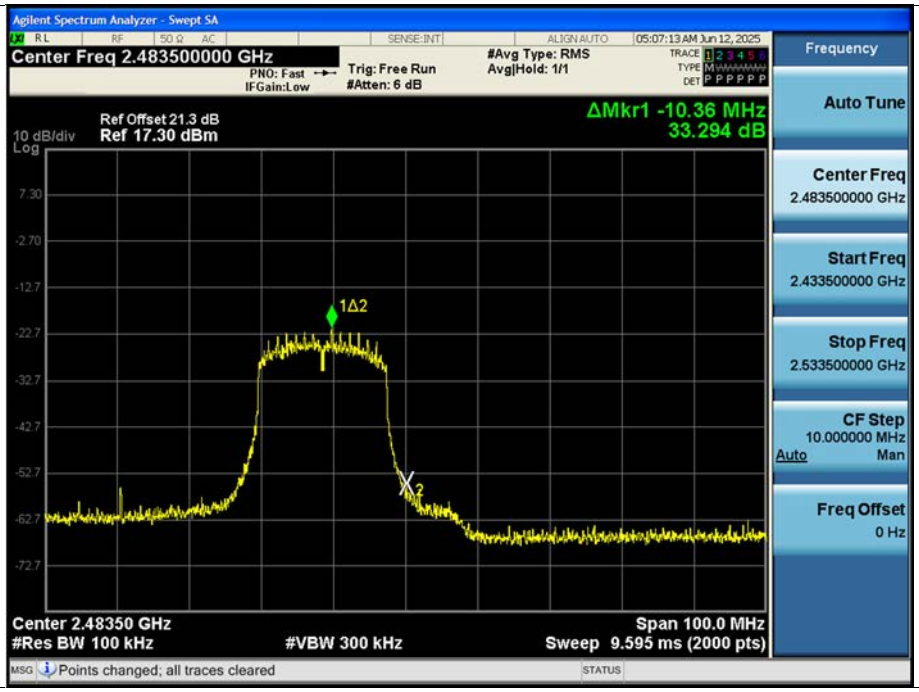


The report shall not be (partly) reproduced except in full without approval of the laboratory.


▣ Test Plots(Conducted Spurious Emission)

Note: In order to simplify the report, attached plots were only the worst case.

[ANT. 1] 802.11n _Ch.13

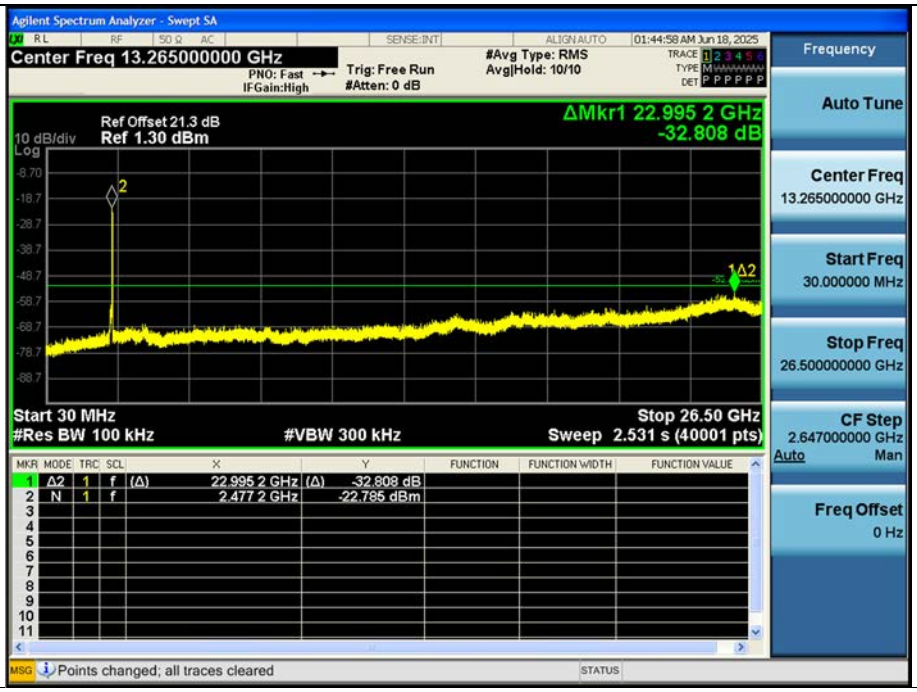

[ANT. 2] 802.11g_Ch.13

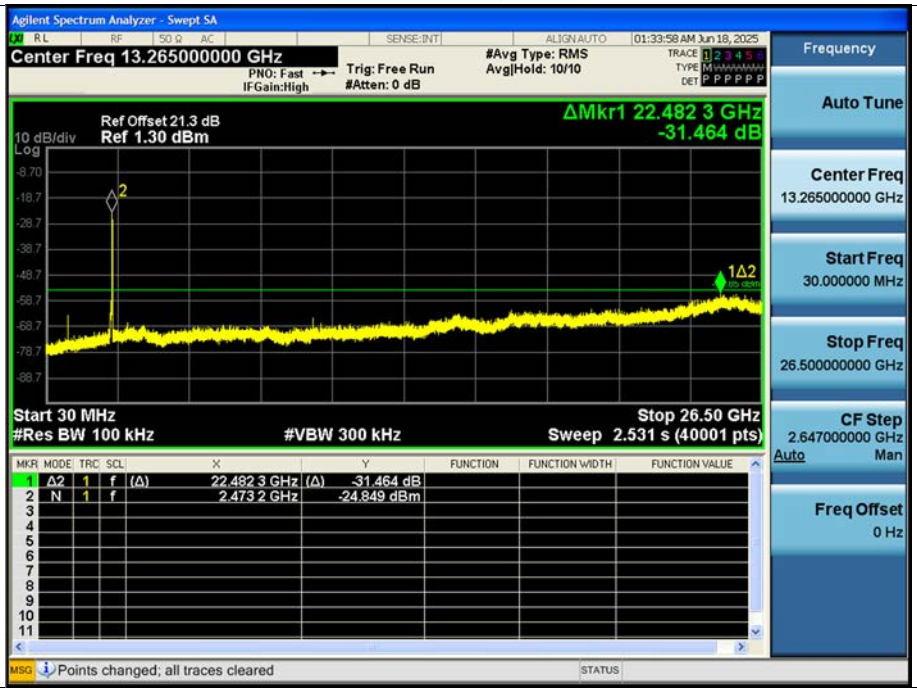

Limit

ANT.1 : -52.785 dBm, ANT.2 : -54.849 dBm

The report shall not be (partly) reproduced except in full without approval of the laboratory.

9.6 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30 MHz

Frequency	Measured Value	A.F+C.L+D.F	Ant. POL	Total	Limit	Margin
[MHz]	[dBμV/m]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]
No Critical peaks found						

Note:

1. The Measured value of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = 40log (specific distance / test distance) (dB)
3. Limit line = specific Limits (dBμV) + Distance extrapolation factor

Frequency Range : Below 1 GHz

Frequency	Measured Value	A.F+C.L	Ant. POL	Total	Limit	Margin
[MHz]	[dBμV/m]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]
No Critical peaks found						

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

The report shall not be (partly) reproduced except in full without approval of the laboratory.

Frequency Range : Above 1 GHz

[MIMO(Ant.1+Ant.2)]

Band :	DTS	Operation Mode :		802.11b			
CH.1	2412 MHz	Transfer Rate :		1Mbps			
Frequency [MHz]	Measured value [dBµV]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Measurement Type
4824	44.48	4.99	V	49.47	73.98	24.51	PK
4824	36.98	4.99	V	41.97	53.98	12.01	AV
7236	39.10	12.93	V	52.03	73.98	21.95	PK
7236	26.70	12.93	V	39.63	53.98	14.35	AV
4824	44.11	4.99	H	49.10	73.98	24.88	PK
4824	37.71	4.99	H	42.70	53.98	11.28	AV
7236	39.05	12.93	H	51.98	73.98	22.00	PK
7236	26.69	12.93	H	39.62	53.98	14.36	AV

Band :	DTS	Operation Mode :		802.11b			
CH.6	2437 MHz	Transfer Rate :		1Mbps			
Frequency [MHz]	Measured value [dBµV]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Measurement Type
4874	45.13	5.25	V	50.38	73.98	23.60	PK
4874	38.72	5.25	V	43.97	53.98	10.01	AV
7311	39.68	12.82	V	52.50	73.98	21.48	PK
7311	29.49	12.82	V	42.31	53.98	11.67	AV
4874	45.36	5.25	H	50.61	73.98	23.37	PK
4874	39.65	5.25	H	44.90	53.98	9.08	AV
7311	40.10	12.82	H	52.92	73.98	21.06	PK
7311	28.57	12.82	H	41.39	53.98	12.59	AV

Band :	DTS	Operation Mode :		802.11b			
CH.11	2462 MHz	Transfer Rate :		1Mbps			
Frequency [MHz]	Measured value [dBµV]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Measurement Type
4924	45.52	5.45	V	50.97	73.98	23.01	PK
4924	38.63	5.45	V	44.08	53.98	9.90	AV
7386	39.69	12.63	V	52.32	73.98	21.66	PK
7386	28.22	12.63	V	40.85	53.98	13.13	AV
4924	46.33	5.45	H	51.78	73.98	22.20	PK
4924	40.79	5.45	H	46.24	53.98	7.74	AV
7386	39.30	12.63	H	51.93	73.98	22.05	PK
7386	27.18	12.63	H	39.81	53.98	14.17	AV

Note:
Channel 12 and 13 are less powerful than channel 11 so the test for high channel was performed at channel 11.


The report shall not be (partly) reproduced except in full without approval of the laboratory.

▣ Test Plots


Note: In order to simplify the report, Plot of worst case are only reported.

[MIMO(Ant.1+Ant.2)]

Radiated Spurious Emissions plot – Average Result (802.11b_1 Mbps, Ch.11 2nd Harmonic, Z-H)

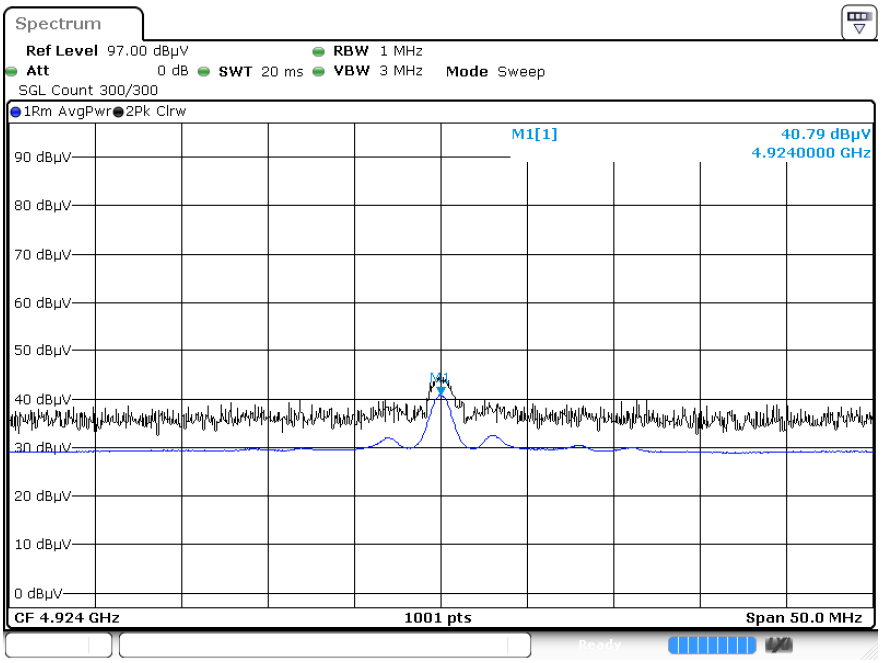

Radiated Spurious Emissions plot – Peak Result (802.11b_1 Mbps, Ch.11 2nd Harmonic, Z-H)

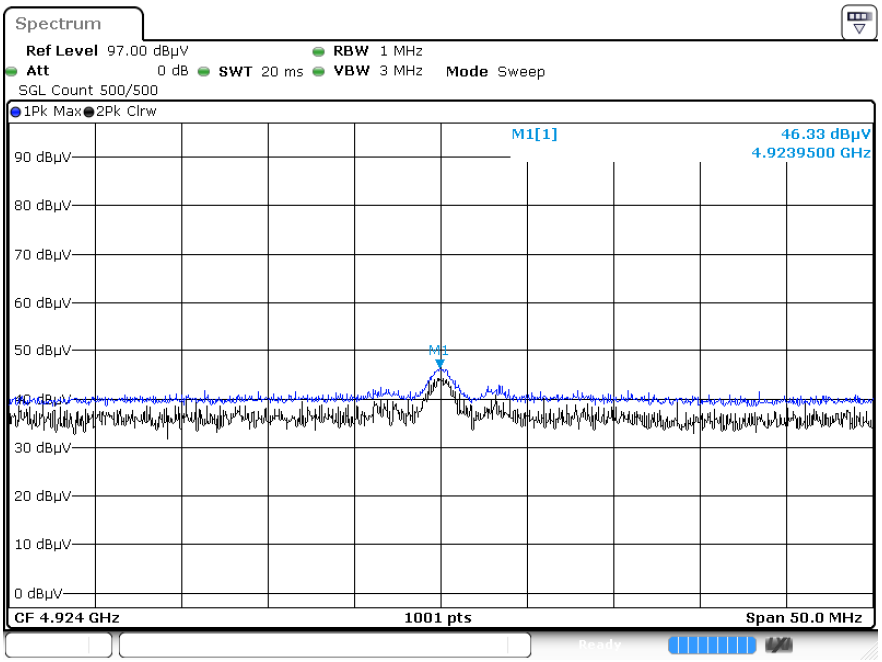

The report shall not be (partly) reproduced except in full without approval of the laboratory.

9.7 RADIATED RESTRICTED BAND EDGES

Note : integration method Used (ANSI C63.10 Section11.13.3)

[MIMO(Ant.1+Ant.2)]

802.11b	Channel	01 Ch	Freq	2412 MHz		Transfer Rate	1 Mbps
Frequency [MHz]	Measured Value [dBµV]	A.F.+C.L+D.F [dB/m]	ANT. POL [H/V]	Total [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Measurement Type
2390.0	31.27	36.66	H	67.93	73.98	6.05	PK
2390.0	12.62	36.66	H	49.28	53.98	4.70	AV

802.11b	Channel	11 Ch	Freq	2462 MHz		Transfer Rate	1 Mbps
Frequency [MHz]	Measured Value [dBµV]	A.F.+C.L+D.F [dB/m]	ANT. POL [H/V]	Total [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Measurement Type
# 2483.5	23.77	37.22	H	60.99	73.98	12.99	PK
# 2483.5	13.25	37.22	H	50.47	53.98	3.51	AV

802.11b	Channel	12 Ch	Freq	2467 MHz		Transfer Rate	1 Mbps
Frequency [MHz]	Measured Value [dBµV]	A.F.+C.L+D.F [dB/m]	ANT. POL [H/V]	Total [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Measurement Type
2483.5	21.09	37.22	H	58.31	73.98	15.67	PK
2483.5	7.45	37.22	H	44.67	53.98	9.31	AV

802.11b	Channel	13 Ch	Freq	2472 MHz		Transfer Rate	1 Mbps
Frequency [MHz]	Measured Value [dBµV]	A.F.+C.L+D.F [dB/m]	ANT. POL [H/V]	Total [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Measurement Type
2483.5	21.36	37.22	H	58.58	73.98	15.40	PK
2483.5	7.28	37.22	H	44.50	53.98	9.48	AV

The report shall not be (partly) reproduced except in full without approval of the laboratory.

802.11g		Channel	01 Ch	Freq	2412 MHz		Transfer Rate	6 Mbps
Frequency	Measured Value	Duty Cycle Factor	A.F.+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBµV]	[dB]	[dB/m]	[H/V]	[dBµV/m]	[dBµV/m]	[dB]	
# 2390	23.69	0.00	36.66	H	60.35	73.98	13.63	PK
# 2390	12.31	0.29	36.66	H	49.26	53.98	4.72	AV

802.11g		Channel	11Ch	Freq	2462MHz		Transfer Rate	6 Mbps
Frequency	Measured Value	Duty Cycle Factor	A.F.+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBµV]	[dB]	[dB/m]	[H/V]	[dBµV/m]	[dBµV/m]	[dB]	
# 2483.5	24.01	0.00	37.22	H	61.23	73.98	12.75	PK
# 2483.5	12.92	0.29	37.22	H	50.43	53.98	3.55	AV

802.11g		Channel	12 Ch	Freq	2467 MHz		Transfer Rate	6 Mbps
Frequency	Measured Value	Duty Cycle Factor	A.F.+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBµV]	[dB]	[dB/m]	[H/V]	[dBµV/m]	[dBµV/m]	[dB]	
2483.5	21.73	0.00	37.22	H	58.95	73.98	15.03	PK
2483.5	6.88	0.29	37.22	H	44.39	53.98	9.59	AV

802.11g		Channel	13 Ch	Freq	2472 MHz		Transfer Rate	6 Mbps
Frequency	Measured Value	Duty Cycle Factor	A.F.+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBµV]	[dB]	[dB/m]	[H/V]	[dBµV/m]	[dBµV/m]	[dB]	
# 2483.5	20.59	0.00	37.22	H	57.81	73.98	16.17	PK
# 2483.5	10.72	0.29	37.22	H	48.23	53.98	5.75	AV

The report shall not be (partly) reproduced except in full without approval of the laboratory.

802.11n (HT20)		Channel	01 Ch	Freq	2412 MHz		Transfer MCS Index	MCS8
Frequency	Measured Value	Duty Cycle Factor	A.F.+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBµV]	[dB]	[dB/m]	[H/V]	[dBµV/m]	[dBµV/m]	[dB]	
# 2390	25.02	0.00	36.66	H	61.68	73.98	12.30	PK
# 2390	13.70	0.56	36.66	H	50.92	53.98	3.06	AV

802.11n (HT20)		Channel	11 Ch	Freq	2462 MHz		Transfer MCS Index	MCS8
Frequency	Measured Value	Duty Cycle Factor	A.F.+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBµV]	[dB]	[dB/m]	[H/V]	[dBµV/m]	[dBµV/m]	[dB]	
# 2483.5	25.08	0.00	37.22	H	62.30	73.98	11.68	PK
# 2483.5	13.00	0.56	37.22	H	50.78	53.98	3.20	AV

802.11n (HT20)		Channel	12 Ch	Freq	2467 MHz		Transfer MCS Index	MCS8
Frequency	Measured Value	Duty Cycle Factor	A.F.+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBµV]	[dB]	[dB/m]	[H/V]	[dBµV/m]	[dBµV/m]	[dB]	
2483.5	21.65	0.00	37.22	H	58.87	73.98	15.11	PK
2483.5	6.86	0.56	37.22	H	44.64	53.98	9.34	AV

802.11n (HT20)		Channel	13 Ch	Freq	2472 MHz		Transfer MCS Index	MCS8
Frequency	Measured Value	Duty Cycle Factor	A.F.+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBµV]	[dB]	[dB/m]	[H/V]	[dBµV/m]	[dBµV/m]	[dB]	
# 2483.5	21.02	0.00	37.22	H	58.24	73.98	15.74	PK
# 2483.5	11.27	0.56	37.22	H	49.05	53.98	4.93	AV

The report shall not be (partly) reproduced except in full without approval of the laboratory.

802.11ac (VHT20)		Channel	01 Ch	Freq	2412 MHz		Transfer MCS Index	MCS0
Frequency	Measured Value	Duty Cycle Factor	A.F.+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBµV]	[dB]	[dB/m]	[H/V]	[dBµV/m]	[dBµV/m]	[dB]	
# 2390	25.38	0.00	36.66	H	62.04	73.98	11.94	PK
# 2390	13.86	0.56	36.66	H	51.08	53.98	2.90	AV

802.11ac (VHT20)		Channel	11 Ch	Freq	2462 MHz		Transfer MCS Index	MCS0
Frequency	Measured Value	Duty Cycle Factor	A.F.+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBµV]	[dB]	[dB/m]	[H/V]	[dBµV/m]	[dBµV/m]	[dB]	
# 2483.5	25.49	0.00	37.22	H	62.71	73.98	11.27	PK
# 2483.5	13.01	0.56	37.22	H	50.79	53.98	3.19	AV

802.11ac (VHT20)		Channel	12 Ch	Freq	2467 MHz		Transfer MCS Index	MCS0
Frequency	Measured Value	Duty Cycle Factor	A.F.+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBµV]	[dB]	[dB/m]	[H/V]	[dBµV/m]	[dBµV/m]	[dB]	
2483.5	21.58	0.00	37.22	H	58.80	73.98	15.18	PK
2483.5	6.88	0.56	37.22	H	44.66	53.98	9.32	AV

802.11ac (VHT20)		Channel	13 Ch	Freq	2472 MHz		Transfer MCS Index	MCS0
Frequency	Measured Value	Duty Cycle Factor	A.F.+C.L+D.F	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBµV]	[dB]	[dB/m]	[H/V]	[dBµV/m]	[dBµV/m]	[dB]	
# 2483.5	21.13	0.00	37.22	H	58.35	73.98	15.63	PK
# 2483.5	11.24	0.56	37.22	H	49.02	53.98	4.96	AV

The report shall not be (partly) reproduced except in full without approval of the laboratory.


▣ Test Plots

Note: In order to simplify the report, Plots of worst case are only reported.

[MIMO(Ant.1+Ant.2)]

Radiated Restricted Band Edges plot – Average Result (802.11ac (VHT20)_MCS0, Ch.11, Z-H)


(Integration method Used)

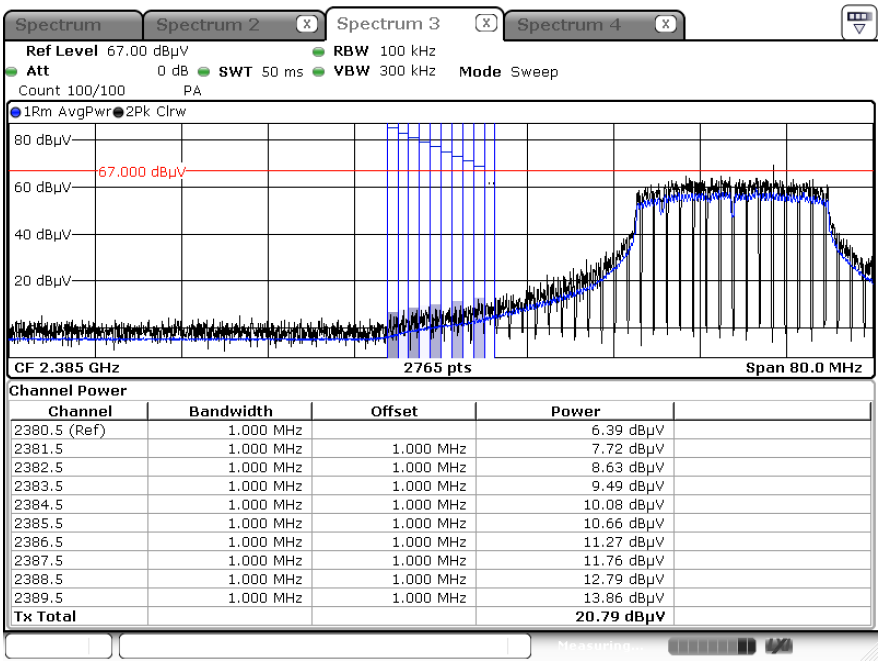

Channel	Bandwidth	Offset	Power
2380.5 (Ref)	1.000 MHz		6.39 dBµV
2381.5	1.000 MHz	1.000 MHz	7.72 dBµV
2382.5	1.000 MHz	1.000 MHz	8.63 dBµV
2383.5	1.000 MHz	1.000 MHz	9.49 dBµV
2384.5	1.000 MHz	1.000 MHz	10.08 dBµV
2385.5	1.000 MHz	1.000 MHz	10.66 dBµV
2386.5	1.000 MHz	1.000 MHz	11.27 dBµV
2387.5	1.000 MHz	1.000 MHz	11.76 dBµV
2388.5	1.000 MHz	1.000 MHz	12.79 dBµV
2389.5	1.000 MHz	1.000 MHz	13.86 dBµV
Tx Total			**20.79 dBµV**

Radiated Restricted Band Edges plot – Peak Result (802.11ac (VHT20)_MCS0, Ch.11, Z-H)

(Integration method Used)

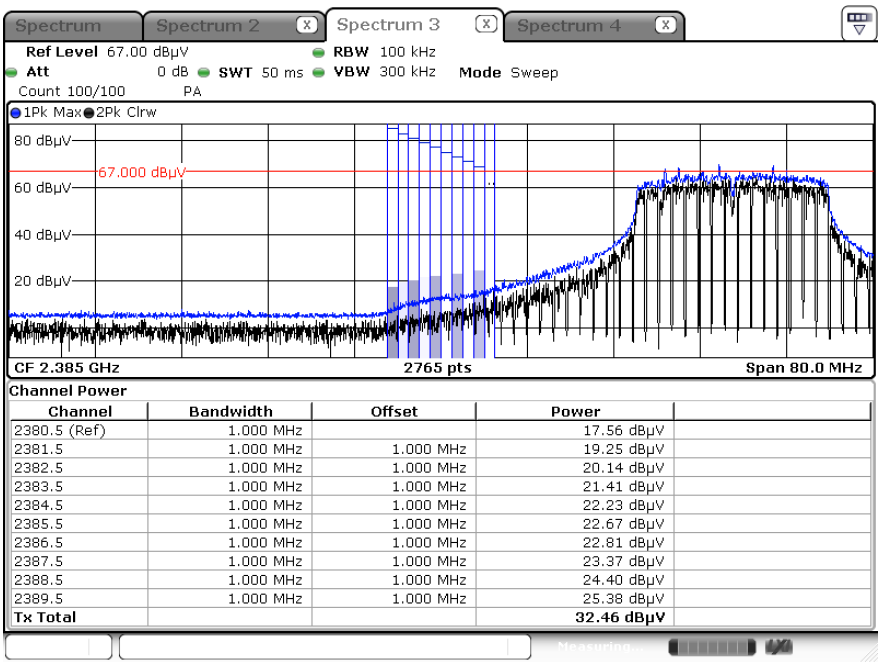

Channel	Bandwidth	Offset	Power
2380.5 (Ref)	1.000 MHz		17.56 dBµV
2381.5	1.000 MHz	1.000 MHz	19.25 dBµV
2382.5	1.000 MHz	1.000 MHz	20.14 dBµV
2383.5	1.000 MHz	1.000 MHz	21.41 dBµV
2384.5	1.000 MHz	1.000 MHz	22.23 dBµV
2385.5	1.000 MHz	1.000 MHz	22.67 dBµV
2386.5	1.000 MHz	1.000 MHz	22.81 dBµV
2387.5	1.000 MHz	1.000 MHz	23.37 dBµV
2388.5	1.000 MHz	1.000 MHz	24.40 dBµV
2389.5	1.000 MHz	1.000 MHz	25.38 dBµV
Tx Total			**32.46 dBµV**

The report shall not be (partly) reproduced except in full without approval of the laboratory.

9.8 POWERLINE CONDUCTED EMISSIONS


Conducted Emissions

Test 1 / 1

Test Report

Common Information

EUT : SM-X406B
Operating Conditions : 2.4G WLAN Mode
Comment :

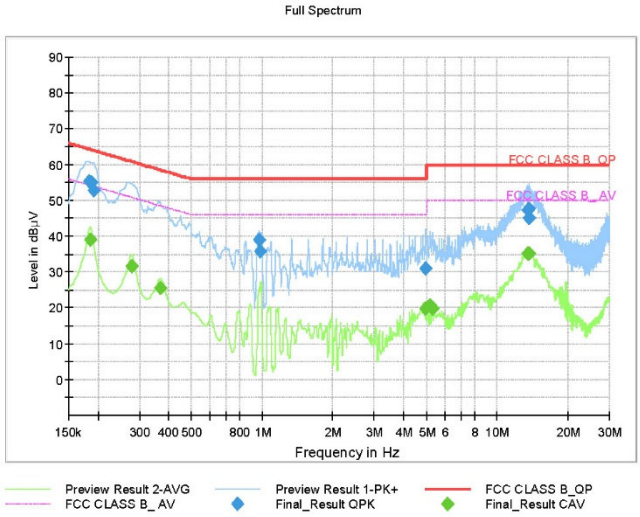

Final_Result_QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.1838	55.30	64.31	9.02	9.000	N	9.6
0.1883	54.96	64.11	9.15	9.000	N	9.6
0.1928	52.88	63.92	11.04	9.000	N	9.6
0.9680	38.98	56.00	17.02	9.000	L1	9.7
0.9838	35.68	56.00	20.32	9.000	N	9.7
4.9708	30.87	56.00	25.13	9.000	L1	9.8
13.5005	47.31	60.00	12.69	9.000	L1	10.2
13.5950	47.53	60.00	12.47	9.000	L1	10.2
13.6580	45.20	60.00	14.80	9.000	L1	10.2

Final_Result_CAV

Frequency (MHz)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.1860	39.14	54.21	15.08	9.000	N	9.6
0.2783	31.53	50.87	19.34	9.000	N	9.6
0.3705	25.61	48.49	22.88	9.000	N	9.6
4.9618	19.67	46.00	26.33	9.000	L1	9.8
5.2093	20.84	50.00	29.16	9.000	L1	9.9
5.3308	19.93	50.00	30.07	9.000	L1	9.9
13.5680	35.07	50.00	14.93	9.000	L1	10.2
13.5950	35.19	50.00	14.81	9.000	L1	10.2
13.6625	35.11	50.00	14.89	9.000	L1	10.2

2025-06-12 오후 8:09:20

The report shall not be (partly) reproduced except in full without approval of the laboratory.

10. LIST OF TEST EQUIPMENT

Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	07/17/2025	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	08/27/2025	Annual
Temperature Chamber	SU-642	ESPEC	0093008124	02/11/2026	Annual
Signal Analyzer	N9030A	Agilent	MY49432108	02/18/2026	Annual
Power Measurement Set	OSP 120	Rohde & Schwarz	100935	08/01/2025	Annual
Power Meter	N1911A	Agilent	MY45100523	02/21/2026	Annual
Power Sensor	N1921A	Agilent	MY57820067	02/04/2026	Annual
Directional Coupler	87300B	Agilent	3116A03621	10/21/2025	Annual
Power Splitter	11667B	Hewlett Packard	10545	01/23/2026	Annual
DC Power Supply	E3632A	Agilent	KR75303243	04/16/2026	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C	HP	07560	05/27/2026	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C	HP	08285	05/19/2026	Annual
Attenuator(20 dB)	18N-20dB	Rohde & Schwarz	8	02/18/2026	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
Bluetooth Tester	CBT	Rohde & Schwarz	100752	12/27/2025	Annual
Automation Software	FCC WLAN Conducted	HCT CO., LTD	-	-	-

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

The report shall not be (partly) reproduced except in full without approval of the laboratory.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	S1AM	07/30/2025	Annual
Turn Table	DS2000-S-1t	Innco system	DS2000/572/54610422/P	N/A	N/A
Amp & Filter Bank Switch Controller	FBSM-01B	T&M system	TM19050002	N/A	N/A
Loop Antenna	1513	Schwarzbeck	1513-175	01/06/2027	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-0895	08/28/2026	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1300	01/03/2026	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-2296	05/16/2026	Biennial
Horn Antenna(15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170342	09/20/2026	Biennial
Spectrum Analyzer	FSV(10 Hz ~ 40 GHz)	Rohde & Schwarz	101055	05/07/2026	Annual
Band Reject Filter	WRCJV2400/2483.5-2370/2520-60/12SS	Wainwright Instruments	2	12/26/2025	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	5	05/27/2026	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	6	05/27/2026	Annual
High Pass Filter(7 GHz ~ 18 GHz)	WHKX10-7150-8000-18000-50SS	Wainwright Instruments	1	02/21/2026	Annual
Power Amplifier	CBL18265035	CERNEX	22966	11/07/2025	Annual
Power Amplifier	CBL26405040	CERNEX	25956	02/19/2026	Annual
Bluetooth Tester	TC-3000C	TESCOM	3000C000175	03/12/2026	Annual
RF Switching System	FMSR-05B (HPF(3~18GHz) + LNA1(1~18GHz))	T&M system	S1L1	12/23/2025	Annual
RF Switching System	FMSR -05B (ATT(10dB) + LNA1(1~18GHz))	T&M system	S1L2	12/23/2025	Annual
RF Switching System	FMSR -05B (ATT(3dB) + LNA1(1~18GHz))	T&M system	S1L3	12/23/2025	Annual
RF Switching System	FMSR -05B (LNA1(1~18GHz))	T&M system	S1L4	12/23/2025	Annual
RF Switching System	FMSR -05B (HPF(7~18GHz) + LNA2(6~18GHz))	T&M system	S1L5	12/23/2025	Annual
RF Switching System	FMSR -05B (Thru(30MHz ~ 18GHz))	T&M system	S1L6	12/23/2025	Annual
Automation Software	FCC WLAN Radiated	HCT CO., LTD	-	-	-

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

The report shall not be (partly) reproduced except in full without approval of the laboratory.

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2506-FC097-P

The report shall not be (partly) reproduced except in full without approval of the laboratory.