

TEST REPORT

EMC Test for SM-X526B

APPLICANT
SAMSUNG Electronics Co., Ltd.

REPORT NO.
HCT-EM-2502-FC005

DATE OF ISSUE
February 17, 2025

Tested by
Wook Yi



Technical Manager
Jeong-Hyun Choi



HCT CO., LTD.
Bongjai Huh
BongJai Huh / CEO

**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Tel. +82 31 645 6300 Fax. +82 31 645 6401

TEST REPORT

FCC Certification

REPORT NO.

HCT-EM-2502-FC005

DATE OF ISSUE

February 17, 2025

FCC ID.

A3LSMX526B

Applicant

SAMSUNG Electronics Co., Ltd.

129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do,
16677, Korea

Product Name

Tablet

Model Name

SM-X526B

Date of Test

01.24.2025 ~ 02.05.2025

Location of Test

☒ Permanent Testing Lab ☐ On Site Testing Lab
(Address: See clause 1.2)

Test Standard Used

FCC CFR 47 PART 15 Subpart B Class B
ANSI C63.4-2014

Test Results

Refer to the present document

Manufacturer

SAMSUNG Electronics Co., Ltd.

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	February 17, 2025	Initial Release

Notice

Content

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked *.

Information provided by the applicant is marked **.

Test results provided by external providers are marked ***.

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

CONTENTS

1. TESTING LABORATORY	5
1.1 General Information	5
1.2 Location of the Test Site	5
2. GENERAL INFORMATION	6
2.1 Description of EUT	6
2.2 Power Source	6
2.3 Tested System Details	7
2.4 Cable Description	7
2.5 Noise Suppression Parts on Cable (I/O Cable)	8
2.6 Test Facility	8
2.7 Calibration of Measuring Instrument	8
2.8 Measurement Uncertainty	9
3. DESCRIPTION OF TESTING	10
3.1 Measurement of Conducted Emission	10
3.2 Measurement of Radiated Emission	11
3.3 Configuration of Tested System	13
4. OPERATION OF THE EUT	14
5. MEASURING INSTRUMENT	16
6. EMISSION TEST SUMMARY	18
6.1 Conducted Emission	18
6.2 Radiated Emission Below 1 GHz	20
6.3 Radiated Emission Above 1 GHz	25
APPENDIX A. TEST SETUP PHOTO	30

1. TESTING LABORATORY

1.1 General Information

Organization Name	HCT CO., LTD.
Address	74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Telephone	+82 31 645 6300
FAX	+82 31 645 6401

1.2 Location of the Test Site

The test site is located at the following address.;

Address	74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Telephone	+82 31 645 6300
FAX	+82 31 645 6401

2. GENERAL INFORMATION

2.1 Description of EUT

FCC ID	A3LSMX526B
Product Name	Tablet
Model Name	SM-X526B
Operating Frequency Band	GSM 850/900/1800/1900, WCDMA FDD 1/2/4/5/8, LTE FDD 1/2/3/4/5/7/8/12/13/17/20/25/26/28/32/66 TDD 38/40/41, 5G FR1 n1/3/5/7/8/20/26/28/38/40/41/66/71/77/78 BT BDR/EDR/LE, WLAN a/b/g/n/ac/ax, GNSS
Testing Frequency Band	GSM 850/1900, WCDMA B2/B4/B5, LTE B2/B4/B5/B12/B13/B17/B25/B26/B41/B66, 5G NR n5/n41/n66/n77/n78, BT BDR/EDR/LE, GNSS, WLAN a/b/g/n/ac/ax
Manufacturer	SAMSUNG Electronics Co., Ltd.

2.2 Power Source

During the test, the following power supply levels are utilized/provided.;

Power supply: AC 120 V, 60 Hz

2.3 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Model Name	Serial Number	Manufacturer
Tablet	SM-X526B	-	SAMSUNG Electronics Co., Ltd.
TA ^{a)}	EP-T2510	-	RFTECH
Data Cable	EP-DN980	-	RFTECH
Earphone	EO-IC100	-	CRESYN
Book Cover Keyboard	EF-DX720	-	SAMSUNG
SPEN	EJ-PX510	-	WACOM

a) Input: 100~240 V, 50~60 Hz, 0.7 A / Output: (PDO)5.0 V, 3.0 A or 9.0 V, 2.77 A (PPS)3.3~11.0 V, 2.25 A

2.4 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
EUT	USB Type C (Data Cable)	Y	N/A	(P) 1.0
	USB Type C (Earphone)	N/A	N	(D) 1.3
	Pogo Pin (Book Cover Keyboard)	N/A	N/A	N/A

“(D)” data cable and “(P)” power cable

2.5 Noise Suppression Parts on Cable (I/O Cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
EUT	Data Cable (USB Type C)	N	N/A	Y	Both End
	Earphone (USB Type C)	N	N/A	Y	EUT End
	Pogo Pin (Book Cover Keyboard)	N/A	N/A	N/A	N/A

2.6 Test Facility

The measurement facilities are constructed in conformance with the requirements of ANSI C63.4-2014.

The Normalized site attenuations (30 MHz to 1 GHz) and Site validation (1 GHz to 18 GHz) were performed in accordance with the standard in ANSI C63.4-2014 and ANSI C63.4a-2017

Our laboratories are accredited and designated in accordance with the provisions of Radio Waves ACT and International Standard ISO/IEC 17025:2017. (National Radio Research Agency, CABID No. KR0032)

2.7 Calibration of Measuring Instrument

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturers recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5:2017.

2.8 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Test Site	Expanded Uncertainty
Conducted Emission	EMI Shield Room	1.5 dB
Radiated Emission	3 m Semi Anechoic Chamber #1	30 MHz to 1 GHz: 5.8 dB
		1 GHz to 18 GHz: 4.9 dB
		18 GHz to 40 GHz: 5.9 dB

3. DESCRIPTION OF TESTING

3.1 Measurement of Conducted Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 7.3

a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN).

If the EUT is connected to the PC through USB, the AC power-line adapter of the PC is directly connected to a line impedance stabilization network (LISN).

Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

b. Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration.

c. The frequency range from 150 kHz to 30 MHz was searched.

Conducted Emission Limits

Frequency (MHz)	Resolution Bandwidth (kHz)	Class A		Class B	
		Quasi-Peak (dBμV)	Average (dBμV)	Quasi-Peak (dBμV)	Average (dBμV)
0.15 to 0.5	9	79	66	66 to 56*	56 to 46*
0.5 to 5	9	73	60	56	46
5 to 30	9	73	60	60	50

NOTE. Decreases with the logarithm of the frequency.

3.2 Measurement of Radiated Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 8.3

- a. The EUT was placed on the top of a turn table 0.8 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 m away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from 1 m to 4 m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 m to 4 m and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to Peak and Average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- g. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.
(1 GHz to 40 GHz)

Radiated Emission Limits

Frequency (MHz)	Class A			Class B		
	Antenna Distance (m)	Field Strength (μV/m)	Quasi-Peak (dBμV/m)	Antenna Distance (m)	Field Strength (μV/m)	Quasi-Peak (dBμV/m)
30 to 88	10	90	39.0	3	100	40.0
88 to 216	10	150	43.5	3	150	43.5
216 to 960	10	210	46.4	3	200	46.0
Above 960	10	300	49.5	3	500	54.0
Frequency (MHz)	Antenna Distance (m)	Class A		Class B		
		Peak (dBμV/m)	Average (dBμV/m)	Peak (dBμV/m)	Average (dBμV/m)	
Above 1 000	3	80	60	74	54	

Frequency Range of Radiated Measurements


An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5th harmonic of the highest frequency or 40 GHz, whichever is lower

3.3 Configuration of Tested System

The EUT was configured in the following manner.

At the request of the manufacturer, the configuration of the tests was arranged.

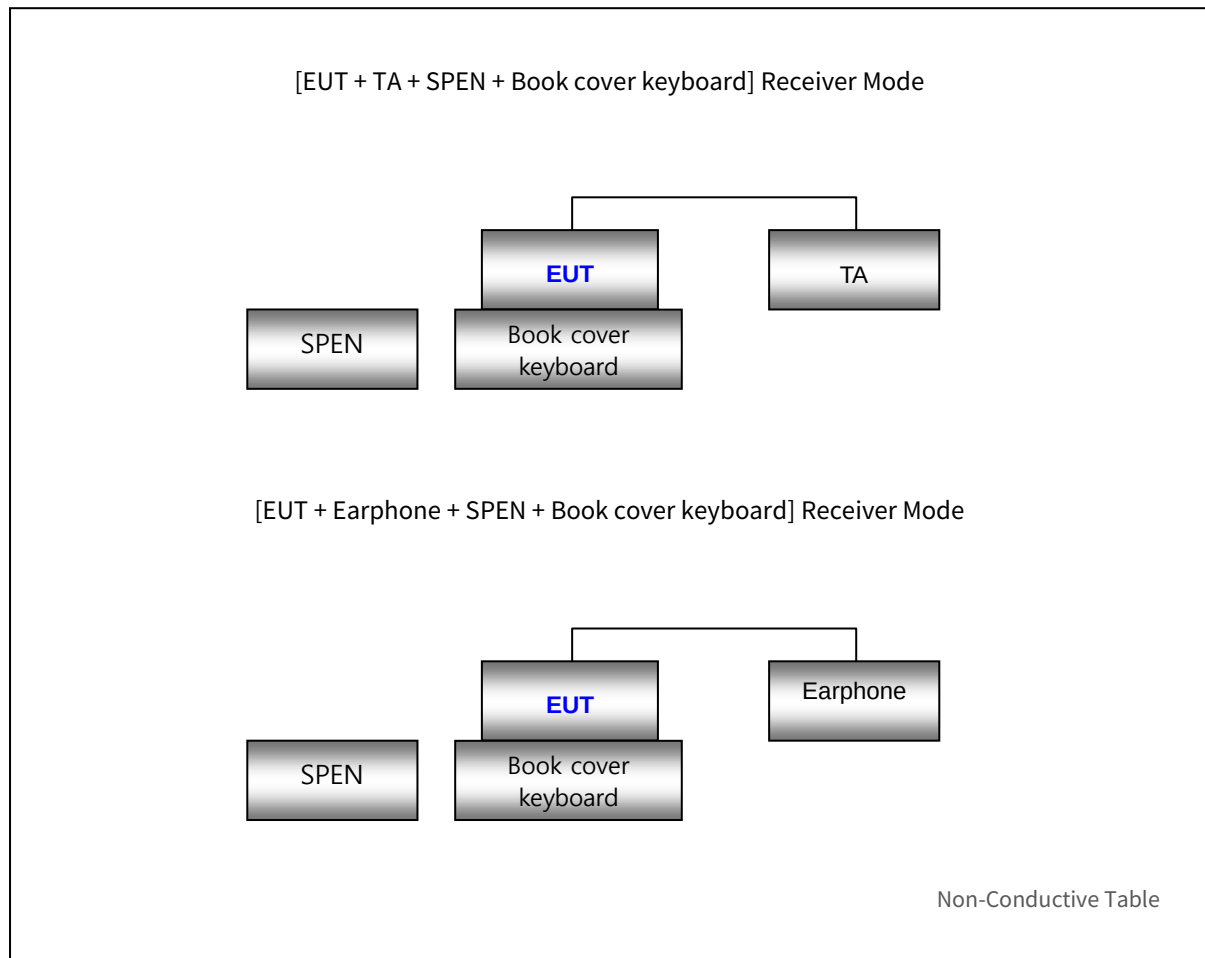

4. OPERATION OF THE EUT

During preliminary tests, the following operating mode was investigated.

Receiver mode(GSM 850 Low/Middle/High ch Idle)
Receiver mode(WCDMA B5 Low/Middle/High ch Idle)
Receiver mode(LTE B5_Low/Middle/High ch)
Receiver mode(LTE B12_Low/Middle/High ch)
Receiver mode(LTE B13_Low/Middle/High ch)
Receiver mode(LTE B17_Low/Middle/High ch)
Receiver mode(LTE B26_Low/Middle/High ch)
Receiver mode(5G NR n5_Low/Middle/High ch)

NOTE. The worst case is tested.

4.1 Conducted Emission

Operating Mode: LTE B5+5G NR n5 High ch Idle mode

NOTE. The worst case of operating mode is reported.

4.2 Radiated Emission

It was final tested the following operating mode, after connecting all peripheral devices.

Operating Mode:

Radiated Emission below 1 GHz

[EUT + TA + SPEN + Book cover keyboard]

LTE B5+5G NR n5 Low ch Idle

LTE B5+5G NR n5 Middle ch Idle

LTE B5+5G NR n5 High ch Idle *

LTE B12(B17)+B13 Low ch Idle

LTE B12(B17)+B13 Middle ch Idle *

LTE B12(B17)+B13 High ch Idle

LTE B26 Low ch Idle

LTE B26 Middle ch Idle *

LTE B26 High ch Idle

[EUT + Earphone + SPEN + Book cover keyboard]

LTE B5+5G NR n5 High ch Idle *

Radiated Emission above 1 GHz

[EUT + TA + SPEN + Book cover keyboard]

LTE B5+5G NR n5 High ch Idle *

LTE B12(B17)+B13 Middle ch Idle

LTE B26 Middle ch Idle

[EUT + Earphone + SPEN + Book cover keyboard]

LTE B5+5G NR n5 High ch Idle *

NOTE.

1. Three orientations have been investigated and the worst-case orientation (x-axis: The display of EUT placed on the table is facing upwards) is reported.
2. Frequency bands adjacent to each other are tested as one mode.
3. The worst case of operating mode is reported. [*].

5. MEASURING INSTRUMENT

Type	Model Name	Manufacturer	Serial Number	Cal. Cycle	Next Cal. Date (yy.mm.dd)
Conducted emission					
☒ EMI Test Receiver	ESR7	Rohde&Schwarz	101910	1 year	2025.08.27
☒ LISN	ENV216	Rohde&Schwarz	102245	1 year	2025.07.17
☒ Radio communication analyzer	MT8821C	ANRITSU	6262192376	1 year	2025.10.15
☒ Radio communication analyzer	MT8000A	ANRITSU	6262208294	1 year	2025.10.14
☒ Antenna (for Communication)	HyperLOG7060	Aaronia	-	-	-
☒ Antenna (for Communication)	HyperLOG7060	Aaronia	-	-	-
☒ Software	EMC32	Rohde & Schwarz	-	-	-
Radiated emission below 1 GHz					
☒ EMI Test Receiver	ESU40	Rohde&Schwarz	100524	1 year	2025.05.07
☒ Bilog Antenna	VULB9168	Schwarzbeck	255	2 year	2025.03.10
☒ Antenna master	MA4640-XP-ET	INNCO SYSTEM	-	N/A	-
☒ Antenna master controller	CO3000	INNCO SYSTEM	CO3000/870 /35990515/L	N/A	-
☒ Turn Table	1060	INNCO systems	-	N/A	-
☒ Turn Table controller	CO2000	INNCO SYSTEM	CO2000/095 /7590304/L	N/A	-
☒ Universal radio communication tester	CMU200	Rohde & Schwarz	107488	1 year	2025.09.24
☒ Wideband Radio Communication Tester	CMW500	Rohde & Schwarz	103246	1 year	2025.09.02
☒ Radio Communication Analyzer	MT8820C	Anritsu	6201181706	1 year	2025.03.29
☒ Radio communication analyzer	MT8821C	ANRITSU	6262192376	1 year	2025.10.15
☒ Radio communication analyzer	MT8000A	ANRITSU	6262208294	1 year	2025.10.14
☒ Antenna (for Communication)	HyperLOG7060	Aaronia	-	-	-
☒ Antenna (for Communication)	HyperLOG7060	Aaronia	-	-	-
☒ Software	EMC32	Rohde & Schwarz	-	-	-

Type	Model Name	Manufacturer	Serial Number	Calibration Cycle	Next Calibration Date
Radiated emission above 1 GHz					
☒ EMI test receiver	ESU40	Rohde & Schwarz	100524	1 year	2025.05.07
☒ Antenna master	MA4640-XP-ET	INNCO SYSTEM	-	N/A	-
☒ Antenna master controller	CO3000	INNCO SYSTEM	CO3000/870/35990515/L	N/A	-
☒ Turn Table	1060	INNCO SYSTEM	-	N/A	-
☒ Turn Table controller	CO2000	INNCO SYSTEM	CO2000/095/7590304/L	N/A	-
☒ Low Noise Amplifier	TK-PA18H	TESTEK	170034-L	1 year	2025.10.14
☒ Low Noise Amplifier	TK-PA1840H	TESTEK	170030-L	1 year	2025.02.20
☒ Horn Antenna	HF907	Rohde & Schwarz	103160	1 year	2025.10.15
☒ Horn Antenna	BBHA 9170	Schwarzbeck	BBHA9170 #786	1 year	2025.10.30
☒ Universal radio communication tester	CMU200	Rohde & Schwarz	107488	1 year	2025.09.24
☒ Wideband Radio Communication Tester	CMW500	Rohde & Schwarz	103246	1 year	2025.09.02
☒ Radio Communication Analyzer	MT8820C	Anritsu	6201181706	1 year	2025.03.29
☒ Radio communication analyzer	MT8821C	ANRITSU	6262192376	1 year	2025.10.15
☒ Radio communication analyzer	MT8000A	ANRITSU	6262208294	1 year	2025.10.14
☒ Antenna (for Communication)	HyperLOG7060	Aaronia	-	-	-
☒ Antenna (for Communication)	HyperLOG7060	Aaronia	-	-	-
☒ Software	EMC32	Rohde & Schwarz	-	-	-

6. EMISSION TEST SUMMARY

6.1 Conducted Emission

6.1.1 Operating Condition

The test results of conducted emission at mains ports provide the following information.;

Date of Test (yy.mm.dd)	2025.02.04		
Temperature	min. 18.4 °C	Relative Humidity	min. 21.9 %
	max. 21.8 °C		max. 25.0 %
Test Site	EMI Shield Room		
Test Standard Used	FCC CFR 47 PART 15 Subpart B Class B ANSI C63.4-2014		
Frequency Range	0.15 MHz to 30 MHz		
Detector	Quasi-Peak, CISPR-Average		
Bandwidth	9 kHz (6 dB)		
Operating Mode	LTE B5+5G NR n5 High ch Idle		

A conducted emission is calculated by the following equation.;


Calculation Formula: $A = B + C$ Where
A: QuasiPeak or CAverage in dB μ V
B: Receiver reading in dB μ V
C: Corr. in dB (LISN Factor + Cable Loss)
Margin in dB = Limit - QuasiPeak or CAverage
L1 = Live, N = Neutral

The measurements from both Live (L1) and Neutral (N) of the LISN are combined into a single graph.

6.1.2 Measurement Data

LTE B5+5G NR n5 High ch Idle Mode

Full Spectrum

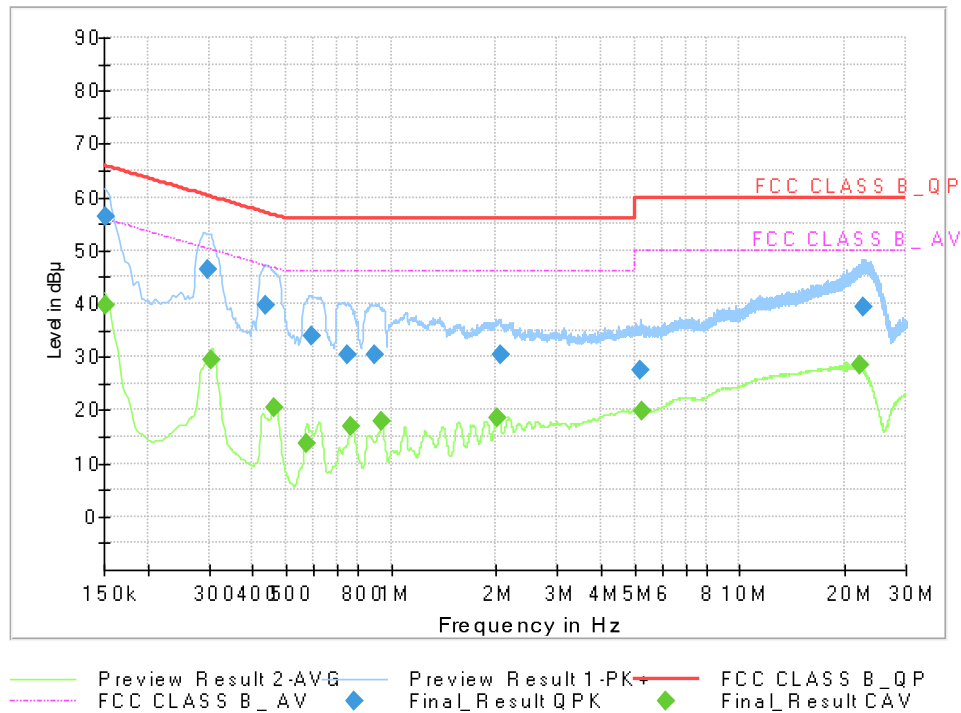

Frequency (MHz)	QuasiPeak (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.1523	56.50	65.88	9.38	9.000	N	9.6
0.2985	46.47	60.28	13.81	9.000	N	9.6
0.4380	39.76	57.10	17.34	9.000	L1	9.7
0.5900	33.83	56.00	22.17	9.000	L1	9.7
0.7453	30.32	56.00	25.68	9.000	N	9.7
0.8983	30.35	56.00	25.65	9.000	L1	9.7
2.0548	30.29	56.00	25.71	9.000	L1	9.7
5.1935	27.47	60.00	32.53	9.000	L1	9.9
22.7098	39.39	60.00	20.61	9.000	N	10.6

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.1523	39.76	55.88	16.12	9.000	N	9.6
0.3053	29.30	50.10	20.80	9.000	N	9.6
0.4628	20.59	46.64	26.05	9.000	N	9.6
0.5720	13.86	46.00	32.14	9.000	L1	9.7
0.7678	16.92	46.00	29.08	9.000	N	9.7
0.9410	18.04	46.00	27.96	9.000	L1	9.7
2.0075	18.39	46.00	27.61	9.000	L1	9.7
5.2385	19.94	50.00	30.06	9.000	L1	9.9
22.1225	28.35	50.00	21.65	9.000	N	10.6

6.2 Radiated Emission Below 1 GHz

6.2.1 Operating Condition

The test results of radiated emission provide the following information:

Date of Test (yy.mm.dd)	2025.01.24 ~ 2025.02.05						
Temperature	min.	17.4	°C	Relative Humidity	min.	21.5	%
	max.	23.2	°C		max.	25.3	%
Test Site	3 m Semi Anechoic Chamber #1						
Used Test Standard	FCC CFR 47 PART 15 Subpart B Class B ANSI C63.4-2014						
Frequency Range	30 MHz to 1 000 MHz						
Detector	Quasi-Peak						
Bandwidth	120 kHz (6 dB)						
Measurement distance	3 m						
Antenna Height	1 m to 4 m						
Operating Mode	[EUT+TA]	LTE B5+5G NR n5 High ch Idle LTE B12(B17)+B13 Middle ch Idle LTE B26 Middle ch Idle					
	[EUT+Earphone]	LTE B5+5G NR n5 High ch Idle					

A field strength is calculated by the following equation.;


Calculation Formula: $A = B + C$ Where
A: Quasi Peak in dBμV/m (Field strength)
B: Receiver reading in dBμV
C: Corr. in dB (Cable loss + Antenna factor)
Margin in dB = Limit - QuasiPeak

The measurements' polarities are H and V, where H stands for horizontal and V stands for vertical.

6.2.2 Measurement Data

[EUT+TA] LTE B5+5G NR n5 High ch Idle mode

Full Spectrum

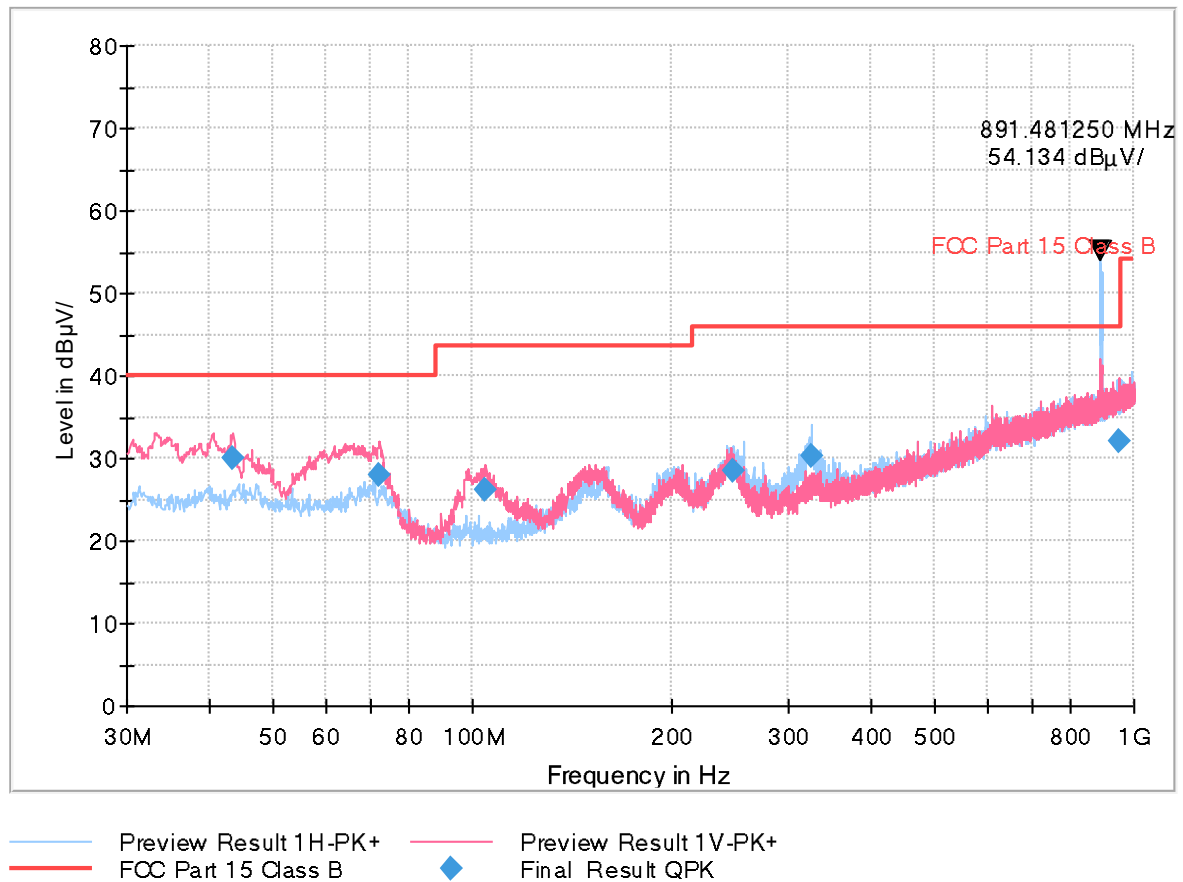


Carrier Frequency: Rx 891.4812 MHz. These are signals for fundamental frequency from the base station

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
43.3000	30.03	40.00	9.97	107.4	V	84.0	19.8
72.4033	27.97	40.00	12.03	125.2	V	299.0	17.7
104.8201	26.24	43.50	17.26	125.2	V	133.0	15.9
248.6217	28.35	46.00	17.65	125.2	H	35.0	19.0
325.9852	30.28	46.00	15.72	100.0	H	51.0	21.2
952.8699	32.06	46.00	13.94	325.1	V	2.0	32.1

[EUT+TA] LTE B12(B17)+B13 Middle ch Idle mode

Full Spectrum

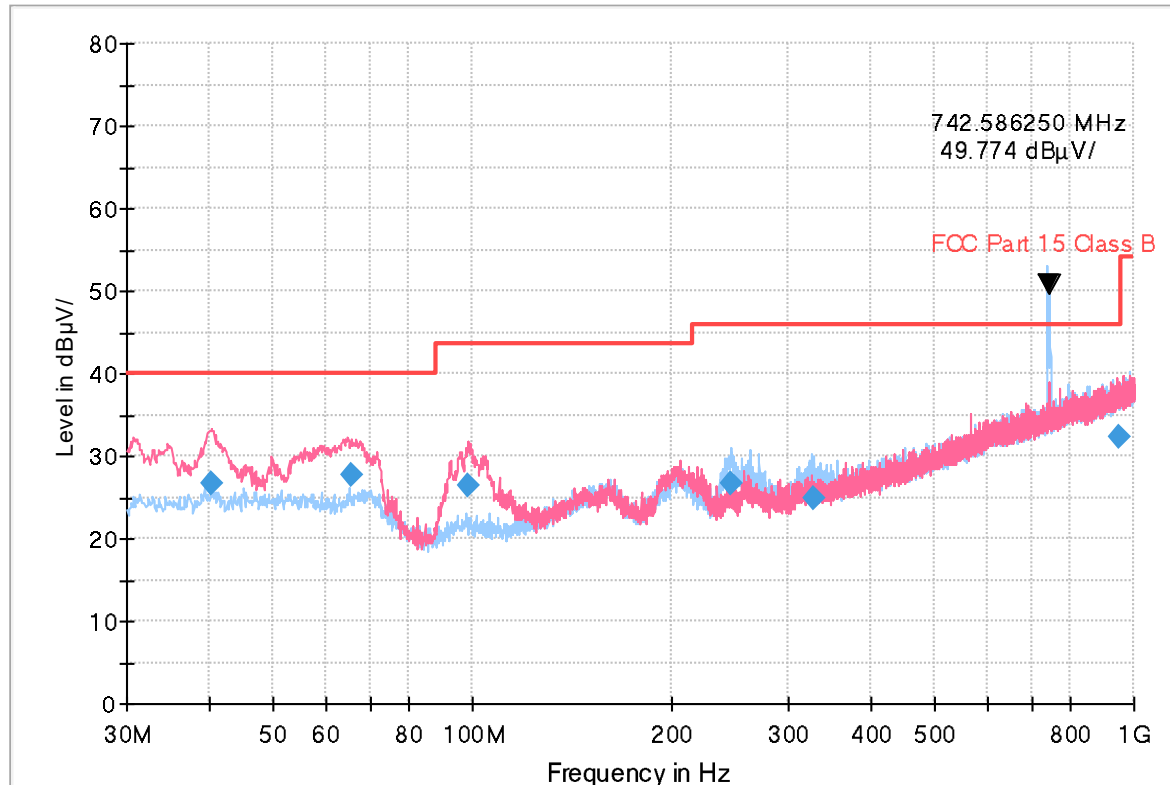


Preview Result 1H-PK+ Preview Result 1V-PK+
FCC Part 15 Class B Final Result QPK

Carrier Frequency: Rx 742.5862 MHz. These are signals for fundamental frequency from the base station

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
40.2905	26.67	40.00	13.33	100.0	V	285.0	19.6
65.5073	27.65	40.00	12.35	125.2	V	1.0	19.0
98.3538	26.35	43.50	17.15	100.0	V	184.0	15.3
246.5032	26.57	46.00	19.43	106.2	H	215.0	19.0
328.0552	24.85	46.00	21.15	100.0	H	41.0	21.2
952.6783	32.23	46.00	13.77	281.3	H	15.0	32.1

[EUT+TA] LTE B26 Middle ch Idle mode

Full Spectrum

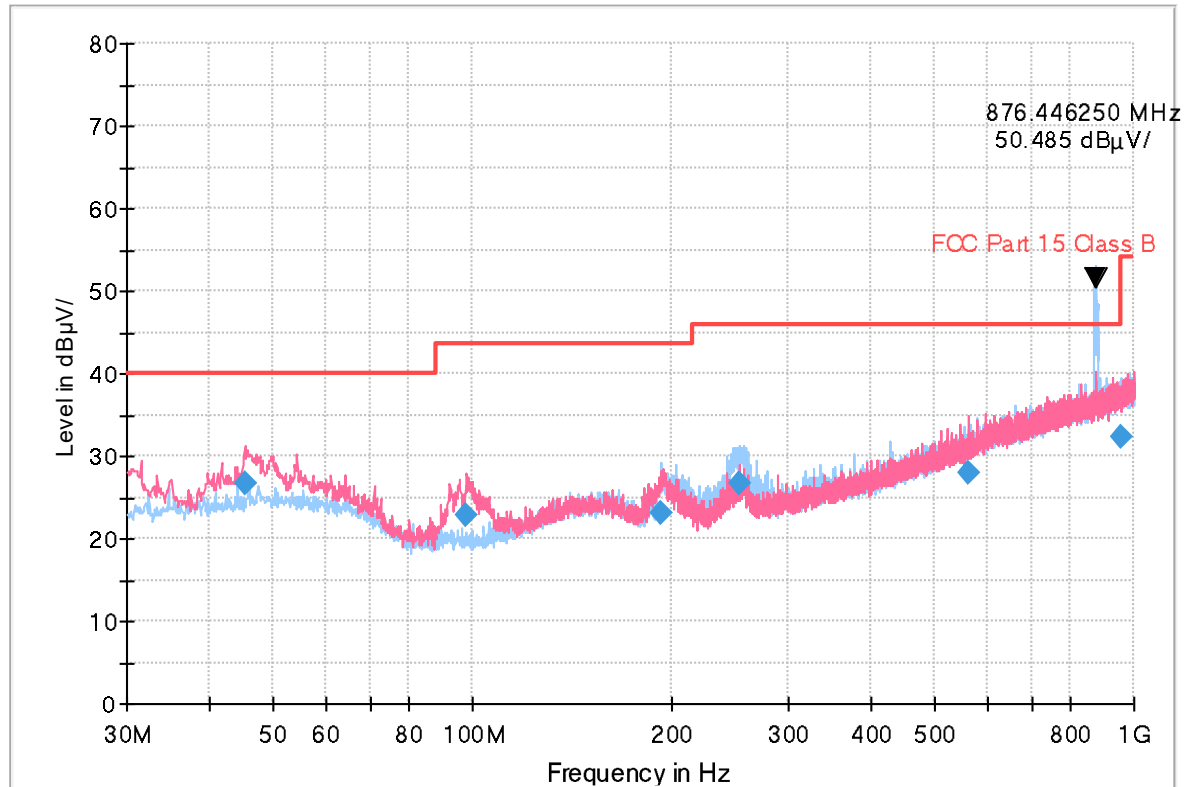


Preview Result 1H-PK+ Preview Result 1V-PK+
FCC Part 15 Class B Final Result QPK

Carrier Frequency: Rx 876.4462 MHz. These are signals for fundamental frequency from the base station

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
45.2724	26.65	40.00	13.35	100.0	V	64.0	20.0
98.0073	22.90	43.50	20.60	100.0	V	177.0	15.2
192.8039	23.01	43.50	20.49	212.3	H	220.0	17.6
254.0212	26.56	46.00	19.44	125.0	H	233.0	19.2
562.1935	27.84	46.00	18.16	100.0	V	86.0	26.7
956.8108	32.29	46.00	13.71	196.1	H	311.0	32.2

[EUT+Earphone] LTE B5+5G NR n5 High ch Idle

Full Spectrum

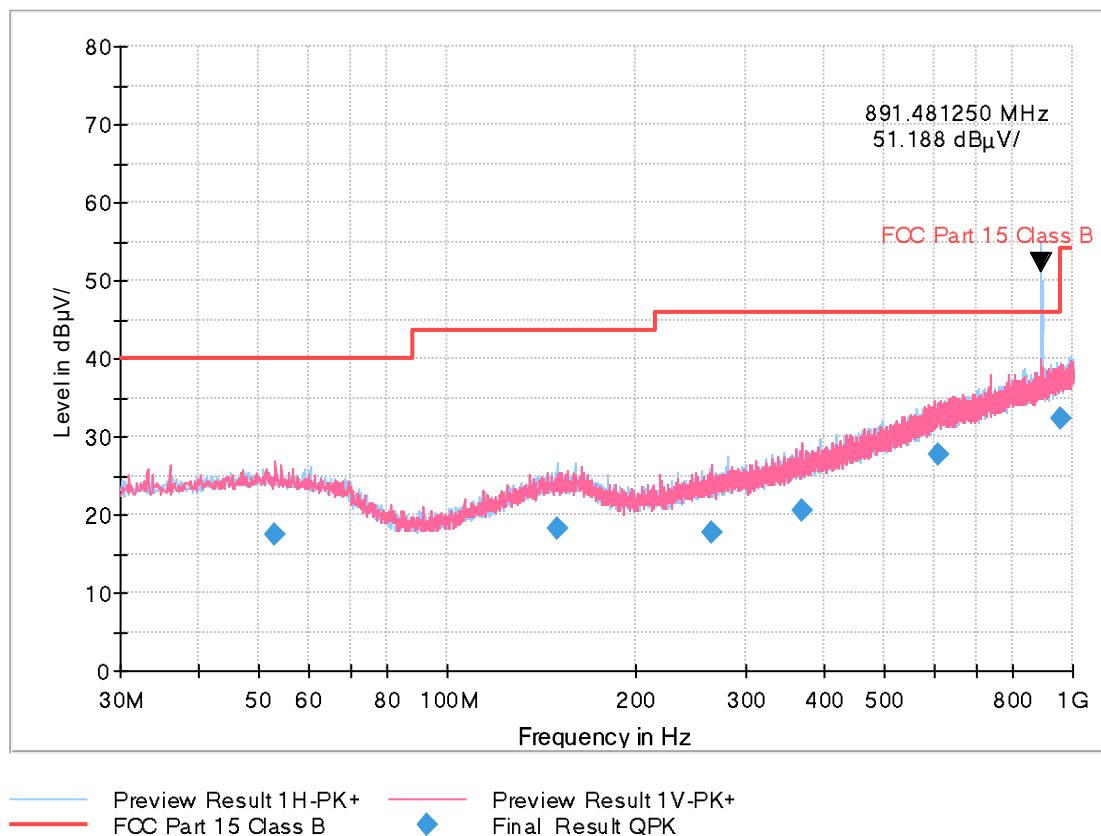

Carrier Frequency: Rx 891.4812 MHz. These are signals for fundamental frequency from the base station

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
53.1223	17.48	40.00	22.52	314.8	V	153.0	20.2
150.0749	18.12	43.50	25.38	106.1	H	39.0	19.7
264.8489	17.77	46.00	28.23	325.1	V	223.0	19.5
368.5583	20.59	46.00	25.41	298.7	V	110.0	22.3
610.1000	27.68	46.00	18.32	325.2	V	153.0	27.6
956.3997	32.29	46.00	13.71	212.7	V	7.0	32.2

6.3 Radiated Emission Above 1 GHz

6.3.1 Operating Condition

The test results of radiated emission provide the following information:

Date of Test (yy.mm.dd)	2025.02.05		
Temperature	min. 20.8 °C	Relative Humidity	min. 23.4 %
	max. 23.1 °C		max. 25.2 %
Test Site	3 m Semi Anechoic Chamber #1		
Used Test Standard	FCC CFR 47 PART 15 Subpart B Class B ANSI C63.4-2014		
Detector	Peak, CISPR-Average		
Bandwidth	1 MHz		
Highest Frequency	5 885 MHz		
Tested Frequency Range	1 GHz to 40 GHz		
Measurement distance	3 m		
Antenna Height	1 m to 4 m		
Operating Mode	[EUT+TA] LTE B5+5G NR n5 High ch Idle [EUT+Earphone] LTE B5+5G NR n5 High ch Idle		

A field strength is calculated by the following equation.;


Calculation Formula: $A = B + C$ Where
A: Peak or CAverage in dBμV/m (Field strength)
B: Receiver reading in dBμV
C: Corr. in dB (Cable loss + Antenna factor – Amplifier Gain)
Margin in dB = Limit - Peak or CAverage

The measurements' polarities are H and V, where H stands for horizontal and V stands for vertical.

6.3.2 Measurement Data

1 GHz - 18 GHz [EUT+TA] LTE B5+5G NR n5 High ch Idle mode

Full Spectrum

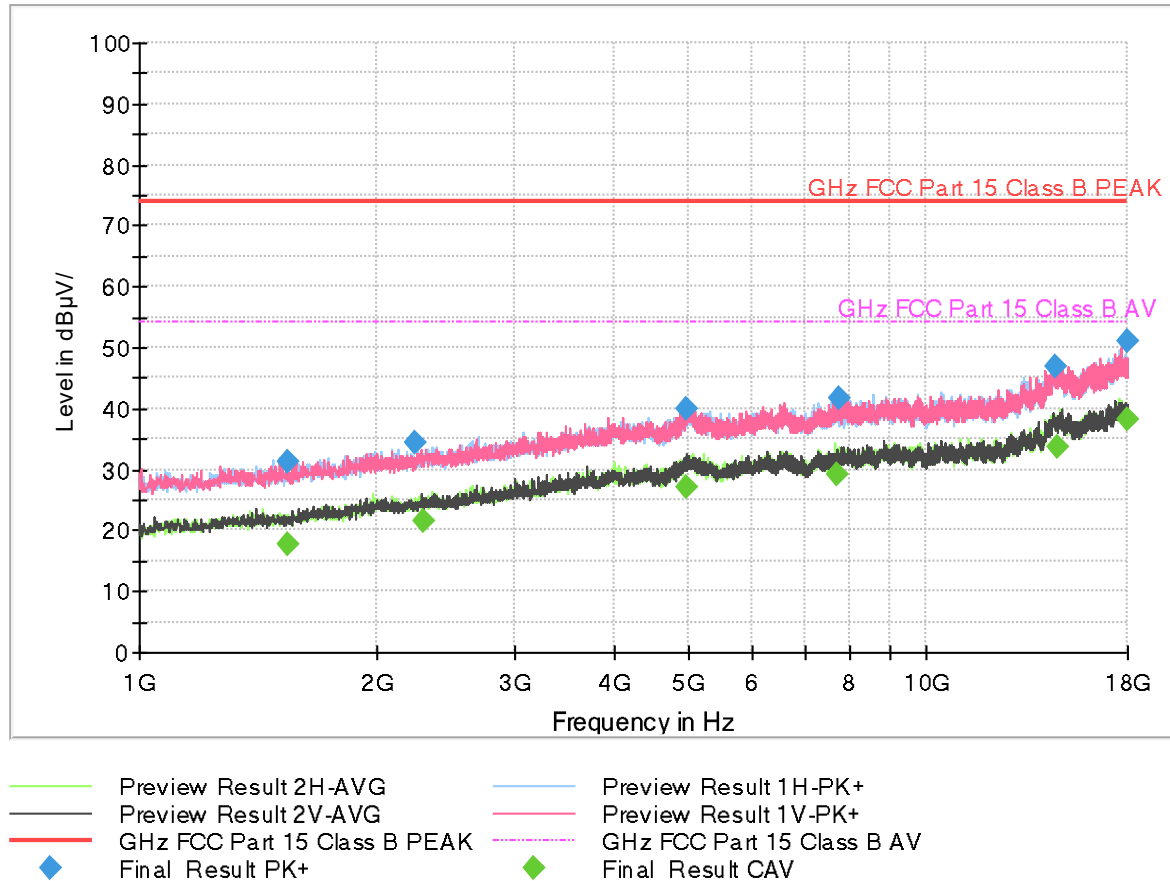


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1541.4850	31.19	74.00	42.81	224.9	H	11.0	-28.4
2246.5500	34.42	74.00	39.58	125.0	H	301.0	-24.7
4961.7100	39.83	74.00	34.17	103.4	H	211.0	-14.7
7739.9700	41.81	74.00	32.19	102.4	H	143.0	-10.3
14560.6850	46.71	74.00	27.29	219.8	H	22.0	0.0
17951.0600	51.09	74.00	22.91	125.2	H	346.0	6.3

Frequency (MHz)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1541.1250	17.71	54.00	36.29	193.8	V	357.0	-28.4
2290.9600	21.60	54.00	32.40	174.2	V	25.0	-24.5
4967.1250	27.25	54.00	26.75	107.4	V	25.0	-14.7
7699.7600	29.03	54.00	24.97	174.3	H	26.0	-10.3
14671.1800	33.78	54.00	20.22	100.0	H	216.0	0.1
17986.2347	38.26	54.00	15.74	108.8	H	1.0	6.5

1 GHz - 18 GHz [EUT+Earphone] LTE B5+5G NR n5 High ch Idle mode

Full Spectrum

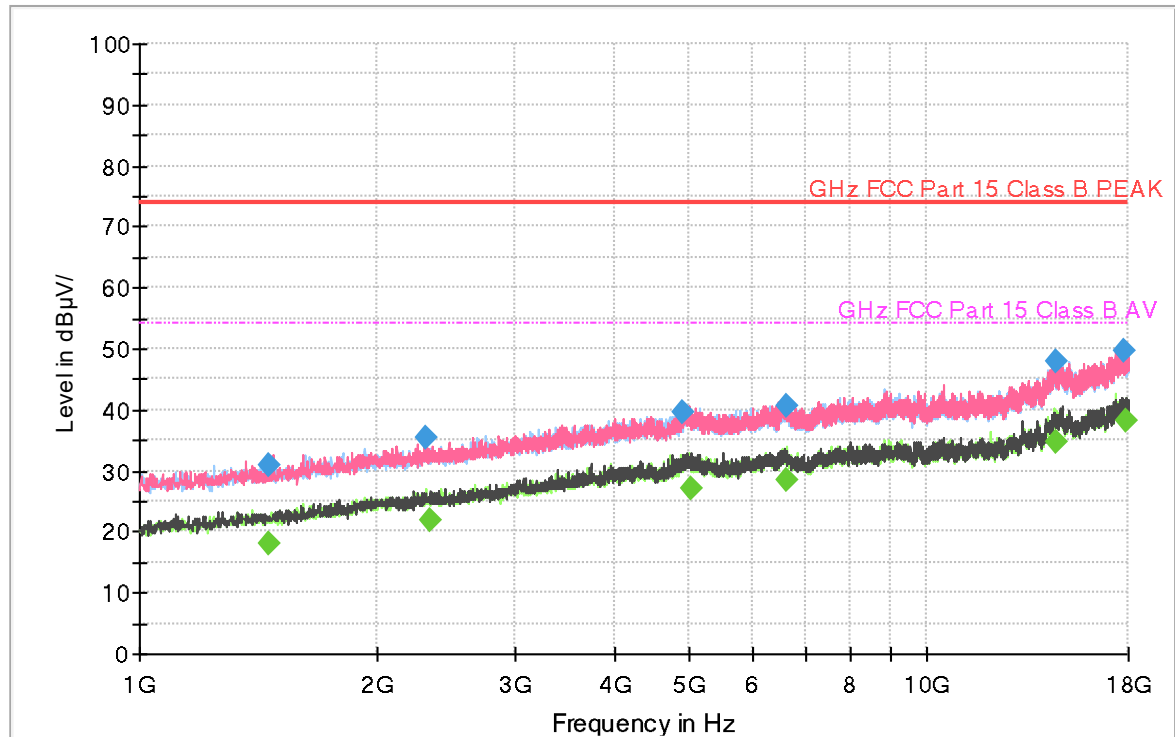


— Preview Result 2H-AVG — Preview Result 1H-PK+
— Preview Result 2V-AVG — Preview Result 1V-PK+
— GHz FCC Part 15 Class B PEAK — GHz FCC Part 15 Class B AV
◆ Final Result PK+ ◆ Final Result CAV

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1462.8000	30.83	74.00	43.17	181.7	V	348.0	-28.9
2313.8350	35.31	74.00	38.69	102.4	V	258.0	-24.4
4887.2900	39.75	74.00	34.25	224.9	H	348.0	-14.9
6616.5750	40.53	74.00	33.47	106.7	V	246.0	-11.6
14554.1700	47.93	74.00	26.07	224.9	H	132.0	0.0
17792.6350	49.72	74.00	24.28	125.2	V	68.0	5.5

Frequency (MHz)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1458.7900	18.01	54.00	35.99	121.3	V	300.0	-28.9
2339.2400	21.95	54.00	32.05	174.1	V	23.0	-24.3
5000.7250	27.21	54.00	26.79	195.2	H	25.0	-14.6
6627.1000	28.39	54.00	25.61	174.1	H	25.0	-11.6
14568.1150	34.65	54.00	19.35	100.0	H	1.0	0.1
17915.6700	38.10	54.00	15.90	100.0	H	126.0	6.1


18 GHz - 40 GHz [EUT+TA] LTE B5+5G NR n5 High ch Idle mode

Full Spectrum

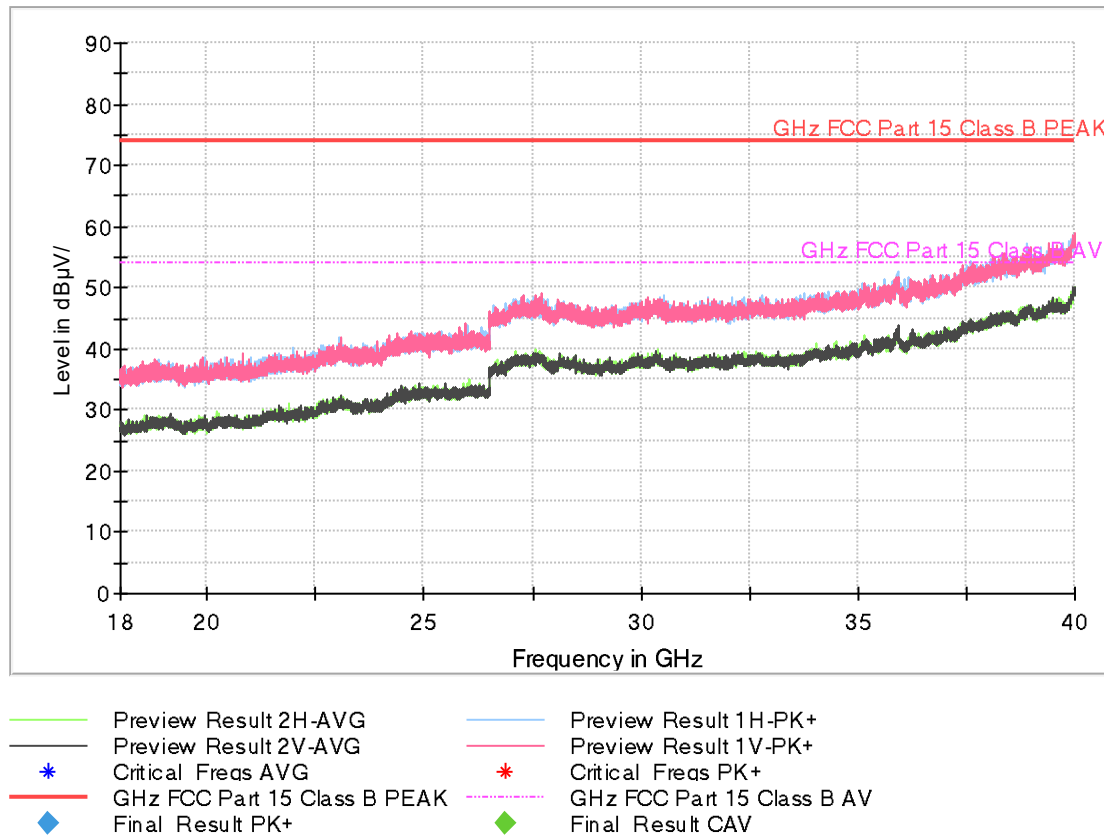

18 GHz - 40 GHz [EUT+Earphone] LTE B5+5G NR n5 High ch Idle mode

Full Spectrum

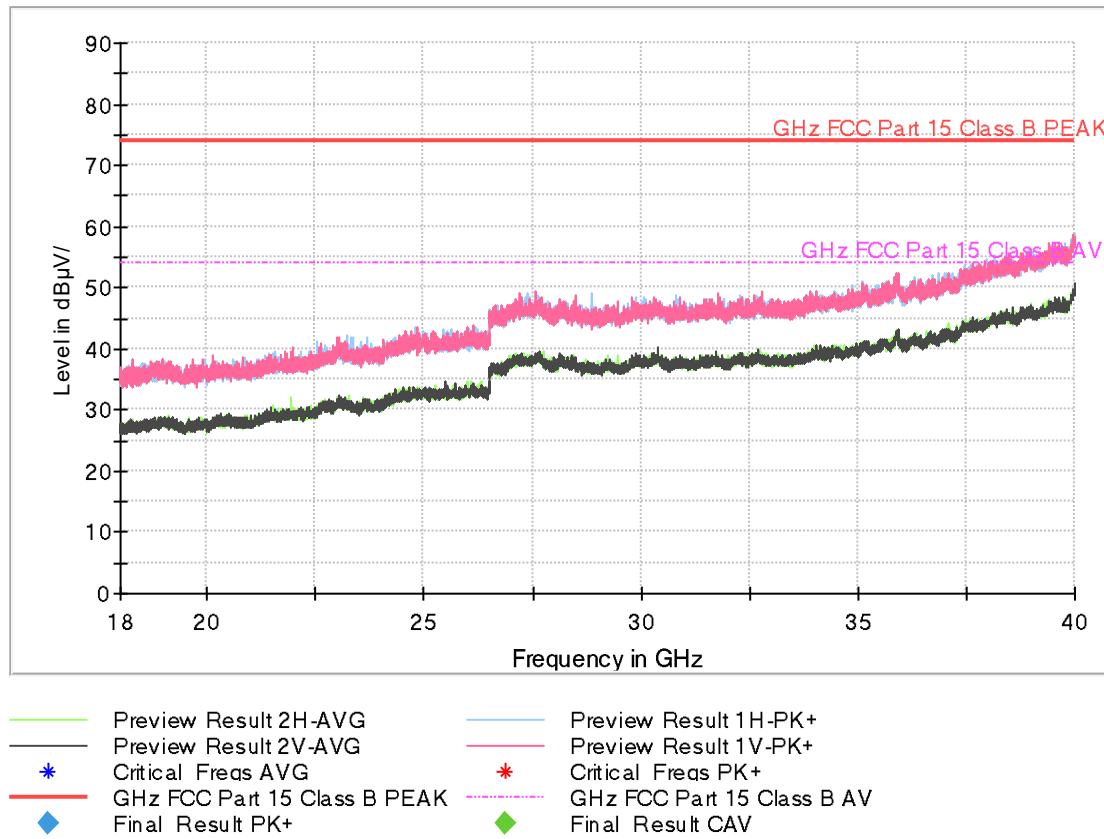

APPENDIX A. TEST SETUP PHOTO

Please refer to Appendix. A and test setup photo file no. as follows;

File No.	Date of Issue	Description
HCT-EM-2502-FC005-P	February 17, 2025	Initial Release

End of report