




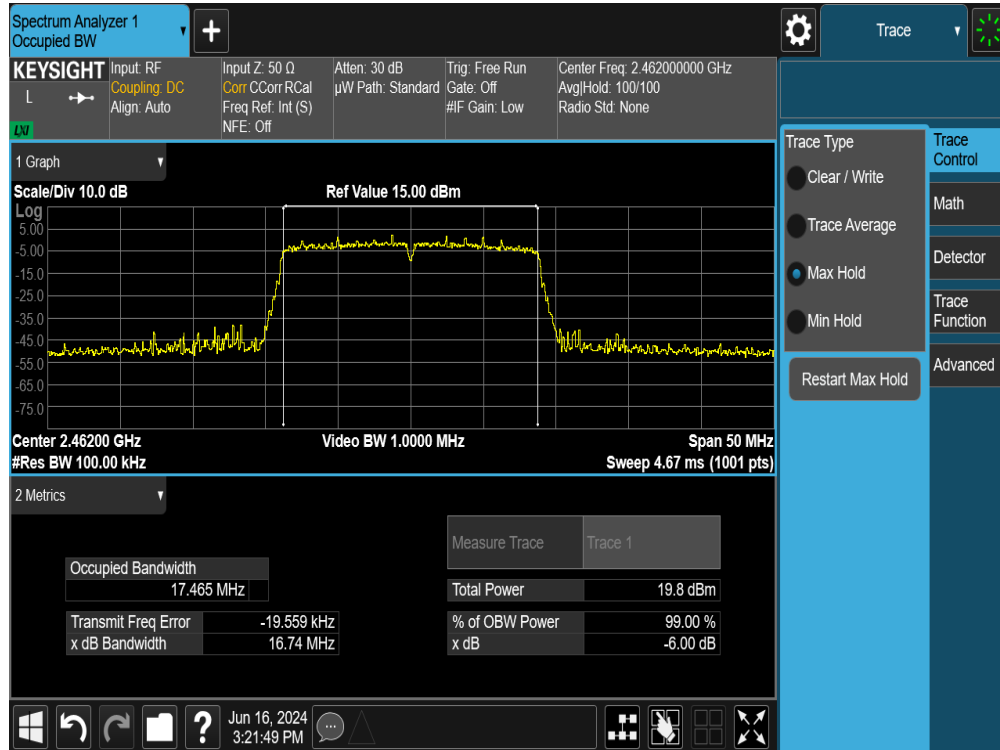


Plot 7-46. 6dB Bandwidth Plot MIMO ANT2 (802.11n (2.4GHz) – Ch. 11)

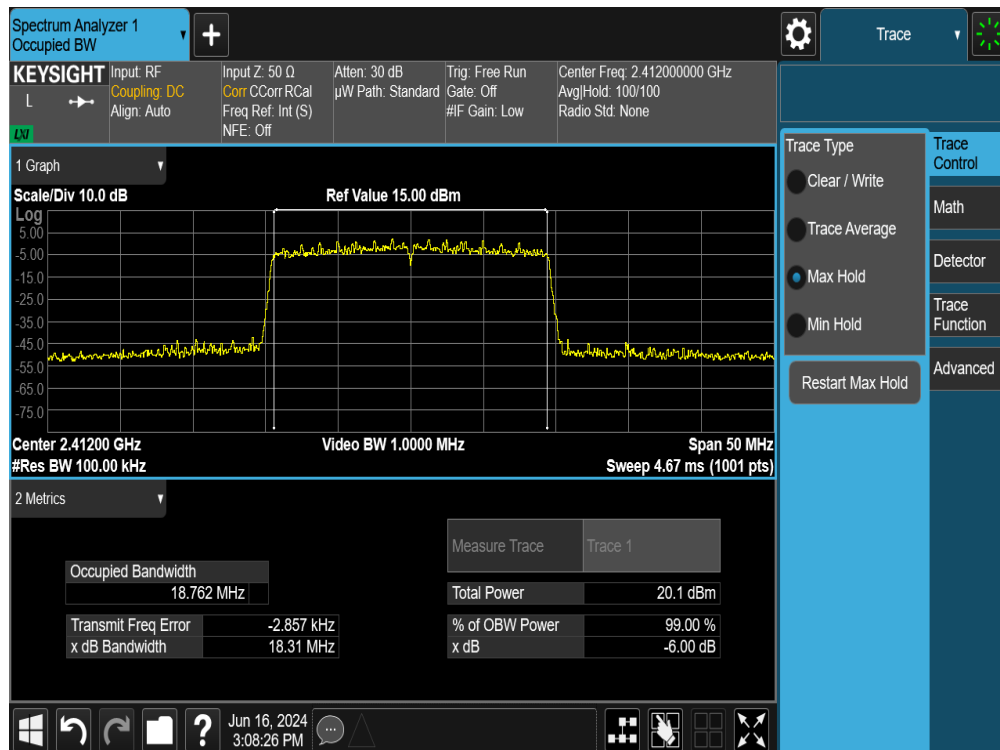

Plot 7-47. 6dB Bandwidth Plot MIMO ANT2 (802.11ax (2.4GHz) – Ch. 1)

FCC ID: A3LSMX820	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-03-R1.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 43 of 154

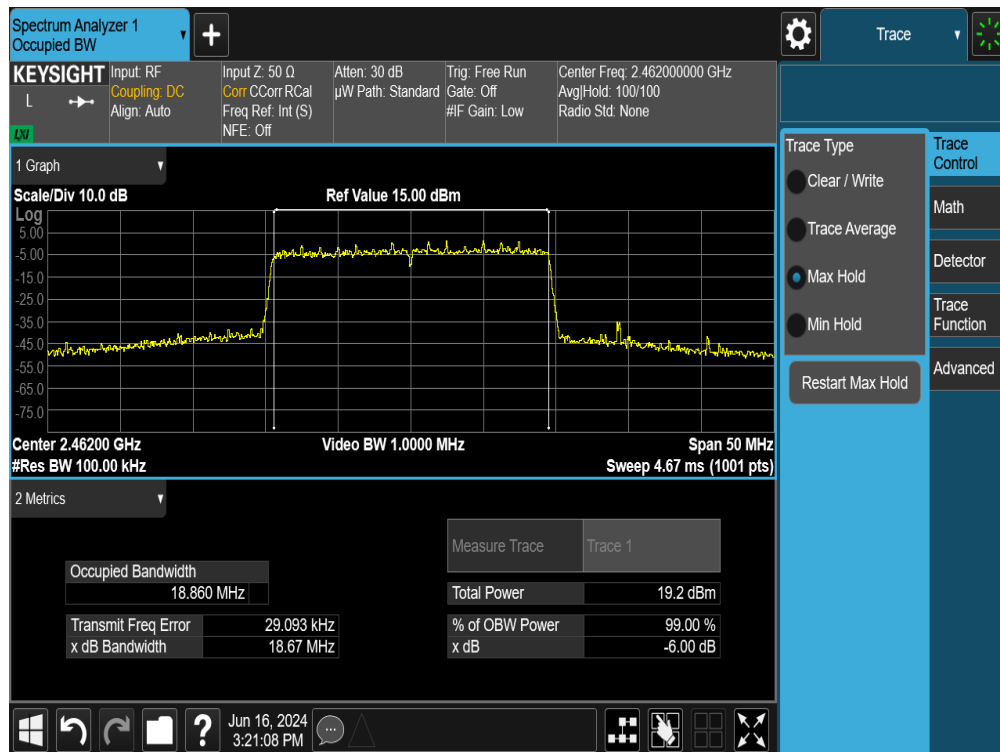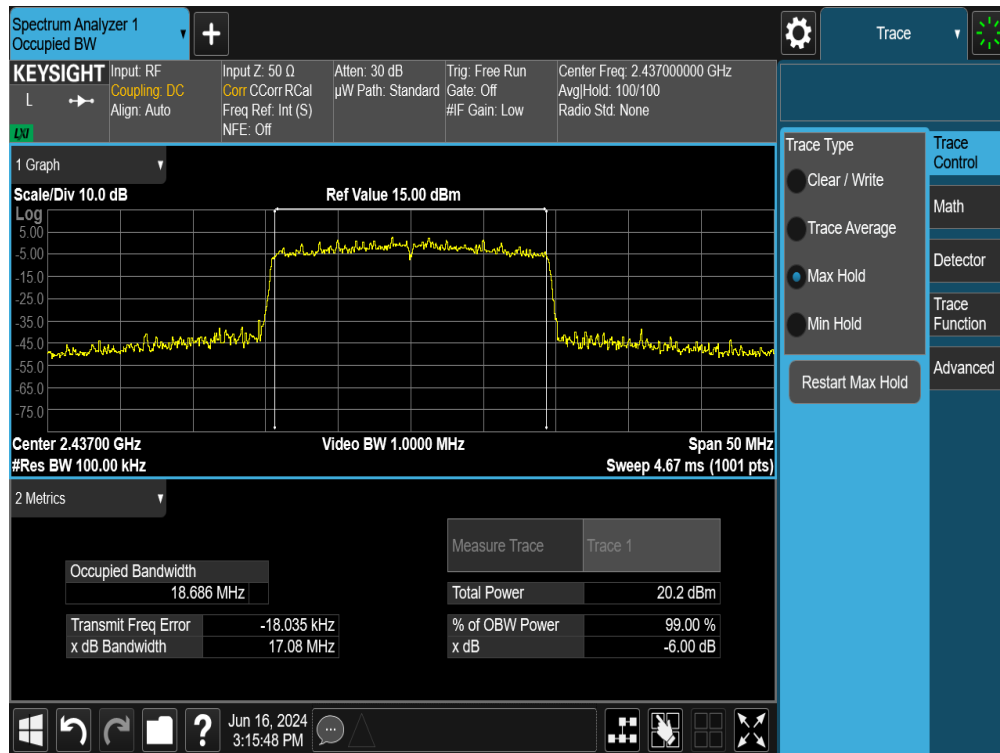

FCC ID: A3LSMX820	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-03-R1.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 44 of 154

7.3 Output Power Measurement

Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt per 15.247.

Test Procedure Used

ANSI C63.10-2013 – Section 11.9.1.3 PKPM1 Peak Power Method

ANSI C63.10-2013 – Section 11.9.2.3.2 Method AVGPM-G

ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique

Test Settings

Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.



Figure 7-2. Test Instrument & Measurement Setup for Power Meter Measurements

Test Notes

None.

FCC ID: A3LSMX820	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-03-R1.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 45 of 154

IEEE 802.11b	2.4GHz WIFI (20MHz 802.11b SISO ANT WIFI 0)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	Freq. [MHz]	Channel	Detector	Conducted Power [dBm]		
	2412	1	Average	14.49	30.00	-15.51
	2437	6		14.78	30.00	-15.22
	2462	11		14.66	30.00	-15.34
	2467	12		2.46	30.00	-27.54
	2472	13		-0.21	30.00	-30.21
	2412	1	Peak	17.21	30.00	-12.79
	2437	6		17.42	30.00	-12.58
	2462	11		17.66	30.00	-12.34
2467	12	4.52		30.00	-25.48	
2472	13	1.99		30.00	-28.01	
IEEE 802.11g	2.4GHz WIFI (20MHz 802.11g SISO Ant WIFI 0)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	Freq. [MHz]	Channel	Detector	Conducted Power [dBm]		
	2412	1	Average	17.69	30.00	-12.31
	2417	2		17.48	30.00	-12.52
	2437	6		17.43	30.00	-12.57
	2457	10		17.67	30.00	-12.33
	2462	11		17.64	30.00	-12.36
	2467	12		2.46	30.00	-27.54
	2472	13		-0.34	30.00	-30.34
	2412	1	Peak	25.68	30.00	-4.32
	2417	2		25.75	30.00	-4.25
	2437	6		23.45	30.00	-6.55
	2457	10		25.72	30.00	-4.28
	2462	11		25.58	30.00	-4.42
	2467	12		10.52	30.00	-19.48
	2472	13		7.42	30.00	-22.58
IEEE 802.11n	2.4GHz WIFI (20MHz 802.11n SISO Ant WIFI 0)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	Freq. [MHz]	Channel	Detector	Conducted Power [dBm]		
	2412	1	Average	15.91	30.00	-14.09
	2417	2		17.39	30.00	-12.61
	2437	6		17.39	30.00	-12.61
	2457	10		17.59	30.00	-12.41
	2462	11		16.61	30.00	-13.39
	2467	12		2.74	30.00	-27.26
	2472	13		0.21	30.00	-29.79
	2412	1	Peak	24.89	30.00	-5.11
	2417	2		25.74	30.00	-4.26
	2437	6		23.39	30.00	-6.61
	2457	10		25.56	30.00	-4.44
	2462	11		25.61	30.00	-4.39
	2467	12		11.24	30.00	-18.76
	2472	13		8.53	30.00	-21.47
IEEE 802.11ax SU	2.4GHz WIFI (20MHz 802.11ax SISO Ant WIFI 0)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	Freq. [MHz]	Channel	Detector	Conducted Power [dBm]		
	2412	1	Average	14.42	30.00	-15.58
	2417	2		14.26	30.00	-15.74
	2437	6		14.39	30.00	-15.61
	2457	10		14.43	30.00	-15.57
	2462	11		14.46	30.00	-15.54
	2467	12		2.36	30.00	-27.64
	2472	13		-0.21	30.00	-30.21
	2412	1	Peak	24.67	30.00	-5.33
	2417	2		24.14	30.00	-5.86
	2437	6		23.15	30.00	-6.85
	2457	10		24.37	30.00	-5.63
	2462	11		24.62	30.00	-5.38
	2467	12		12.41	30.00	-17.59
	2472	13		9.74	30.00	-20.26

Table 7-8. Conducted Output Power Measurements SISO ANT1

FCC ID: A3LSMX820	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-03-R1.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 46 of 154

IEEE 802.11b	2.4GHz WIFI (20MHz 802.11b SISO Ant WIFI 1)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	Freq. [MHz]	Channel	Detector	Conducted Power [dBm]		
	2412	1	Average	14.69	30.00	-15.31
	2437	6		14.81	30.00	-15.19
	2462	11		14.69	30.00	-15.31
	2467	12		2.91	30.00	-27.09
	2472	13		-0.02	30.00	-30.02
	2412	1	Peak	17.89	30.00	-12.11
	2437	6		18.01	30.00	-11.99
	2462	11		17.22	30.00	-12.78
	2467	12		6.21	30.00	-23.79
2472	13	2.88		30.00	-27.12	
IEEE 802.11g	2.4GHz WIFI (20MHz 802.11g SISO Ant WIFI 1)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	Freq. [MHz]	Channel	Detector	Conducted Power [dBm]		
	2412	1	Average	17.77	30.00	-12.23
	2417	2		17.48	30.00	-12.52
	2437	6		17.52	30.00	-12.48
	2457	10		17.63	30.00	-12.37
	2462	11		17.57	30.00	-12.43
	2467	12		2.58	30.00	-27.42
	2472	13		-0.85	30.00	-30.85
	2412	1	Peak	24.87	30.00	-5.13
	2417	2		24.39	30.00	-5.61
	2437	6		23.96	30.00	-6.04
	2457	10		24.78	30.00	-5.22
	2462	11		24.51	30.00	-5.49
	2467	12		12.68	30.00	-17.32
	2472	13	9.77	30.00	-20.23	
IEEE 802.11n	2.4GHz WIFI (20MHz 802.11n SISO Ant WIFI 1)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	Freq. [MHz]	Channel	Detector	Conducted Power [dBm]		
	2412	1	Average	15.69	30.00	-14.31
	2417	2		17.42	30.00	-12.58
	2437	6		17.32	30.00	-12.68
	2457	10		17.63	30.00	-12.37
	2462	11		16.49	30.00	-13.51
	2467	12		2.26	30.00	-27.74
	2472	13		-0.21	30.00	-30.21
	2412	1	Peak	23.33	30.00	-6.67
	2417	2		24.59	30.00	-5.41
	2437	6		23.94	30.00	-6.06
	2457	10		24.74	30.00	-5.26
	2462	11		23.58	30.00	-6.42
	2467	12		11.04	30.00	-18.96
	2472	13		8.88	30.00	-21.12
IEEE 802.11ax SU	2.4GHz WIFI (20MHz 802.11ax SISO Ant WIFI 1)				Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	Freq. [MHz]	Channel	Detector	Conducted Power [dBm]		
	2412	1	Average	14.72	30.00	-15.28
	2417	2		14.41	30.00	-15.59
	2437	6		14.42	30.00	-15.58
	2457	10		14.55	30.00	-15.45
	2462	11		14.53	30.00	-15.47
	2467	12		2.78	30.00	-27.22
	2472	13		-0.02	30.00	-30.02
	2412	1	Peak	24.27	30.00	-5.73
	2417	2		24.23	30.00	-5.77
	2437	6		23.61	30.00	-6.39
	2457	10		24.38	30.00	-5.62
	2462	11		24.05	30.00	-5.95
	2467	12		11.99	30.00	-18.01
	2472	13		10.14	30.00	-19.86

Table 7-9. Conducted Output Power Measurements SISO ANT2

FCC ID: A3LSMX820	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-03-R1.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 47 of 154

IEEE 802.11b	2.4GHz WIFI (20MHz 802.11b MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	Freq [MHz]	Channel	Detector	Conducted Power [dBm]				
				ANT1	ANT2	MIMO		
2412	1	Average	14.24	13.95	17.11	30.00	-12.89	
2437	6		14.92	14.32	17.64	30.00	-12.36	
2462	11		14.93	14.22	17.60	30.00	-12.40	
2467	12		2.26	2.71	5.50	30.00	-24.50	
2472	13		-1.92	-1.02	1.56	30.00	-28.44	
2412	1	Peak	17.62	17.01	20.34	30.00	-9.66	
2437	6		17.45	17.58	20.53	30.00	-9.47	
2462	11		17.55	17.82	20.70	30.00	-9.30	
2467	12		4.81	5.34	8.09	30.00	-21.91	
2472	13		0.64	1.65	4.18	30.00	-25.82	
IEEE 802.11g	2.4GHz WIFI (20MHz 802.11g MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	Freq [MHz]	Channel	Detector	Conducted Power [dBm]				
				ANT1	ANT2	MIMO		
	2412	1	Average	17.32	17.78	20.57	30.00	-9.43
	2417	2		17.38	17.45	20.43	30.00	-9.57
	2437	6		17.47	17.42	20.46	30.00	-9.54
	2457	10		17.58	17.63	20.62	30.00	-9.38
	2462	11		17.58	17.48	20.54	30.00	-9.46
	2467	12		2.39	2.84	5.63	30.00	-24.37
	2472	13	Peak	-1.92	-1.01	1.57	30.00	-28.43
	2412	1		23.65	24.63	27.18	30.00	-2.82
	2417	2		23.41	24.14	26.80	30.00	-3.20
	2437	6		23.04	23.53	26.30	30.00	-3.70
	2457	10		23.39	24.32	26.89	30.00	-3.11
	2462	11		23.31	24.12	26.74	30.00	-3.26
2467	12	12.78		13.52	16.18	30.00	-13.82	
2472	13	8.29		9.11	11.73	30.00	-18.27	
IEEE 802.11n	2.4GHz WIFI (20MHz 802.11n MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	Freq [MHz]	Channel	Detector	Conducted Power [dBm]				
				ANT1	ANT2	MIMO		
	2412	1	Average	15.45	16.14	18.82	30.00	-11.18
	2417	2		17.34	17.43	20.40	30.00	-9.60
	2437	6		17.39	17.34	20.38	30.00	-9.62
	2457	10		17.53	17.61	20.58	30.00	-9.42
	2462	11		16.53	16.71	19.63	30.00	-10.37
	2467	12		2.54	2.83	5.70	30.00	-24.30
	2472	13	Peak	-1.77	-1.02	1.63	30.00	-28.37
	2412	1		23.61	24.49	27.08	30.00	-2.92
	2417	2		23.41	24.15	26.81	30.00	-3.19
	2437	6		23.01	23.51	26.28	30.00	-3.72
	2457	10		23.32	24.28	26.84	30.00	-3.16
	2462	11		23.31	24.07	26.72	30.00	-3.28
2467	12	12.72		13.09	15.92	30.00	-14.08	
2472	13	8.63		9.17	11.92	30.00	-18.08	
IEEE 802.11ax SU	2.4GHz WIFI (20MHz 802.11ax MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]
	Freq [MHz]	Channel	Detector	Conducted Power [dBm]				
				ANT1	ANT2	MIMO		
	2412	1	Average	14.32	14.83	17.59	30.00	-12.41
	2437	6		14.22	14.43	17.34	30.00	-12.66
	2462	11		14.68	14.51	17.61	30.00	-12.39
	2467	12		2.53	2.97	5.77	30.00	-24.23
	2472	13		-1.74	-0.82	1.75	30.00	-28.25
	2412	1	Peak	23.27	23.84	26.57	30.00	-3.43
	2437	6		22.84	23.32	26.10	30.00	-3.90
	2462	11		23.14	23.48	26.32	30.00	-3.68
	2467	12		13.22	13.41	16.33	30.00	-13.67
	2472	13		8.67	9.13	11.92	30.00	-18.08

Table 7-10. Conducted Output Power Measurements MIMO

FCC ID: A3LSMX820	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-03-R1.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 48 of 154



Note:

Per ANSI C63.10-2013 Section 14.2, the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

At 2412MHz the average conducted output power was measured to be 18.42 dBm for Antenna 1 and 18.87 dBm for Antenna 2.

Antenna 1 + Antenna 2 = MIMO

$$(18.42\text{dBm} + 18.87\text{ dBm}) = (69.50\text{ mW} + 77.09\text{ mW}) = 146.59\text{ mW} = 21.66\text{ dBm}$$

FCC ID: A3LSMX820	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-03-R1.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 49 of 154

7.4 Power Spectral Density

Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates are investigated and the worst-case configuration results are reported in this section.

The maximum permissible power spectral density shall not be greater than 8 dBm in any 3 kHz band.

Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD

ANSI C63.10-2013 – Section 14.3.1 Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 10kHz
4. VBW = 1MHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: A3LSMX820	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-03-R1.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 50 of 154

Power Spectral Density Measurements

Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	b	1	-0.90	8.00	-8.90	Pass
2437	6	b	1	-1.11	8.00	-9.11	Pass
2462	11	b	1	-1.38	8.00	-9.38	Pass
2412	1	g	6	-4.45	8.00	-12.45	Pass
2437	6	g	6	-4.34	8.00	-12.34	Pass
2462	11	g	6	-4.34	8.00	-12.34	Pass
2412	1	n	6.5/7.2 (MCS0)	-5.39	8.00	-13.39	Pass
2437	6	n	6.5/7.2 (MCS0)	-4.36	8.00	-12.36	Pass
2462	11	n	6.5/7.2 (MCS0)	-4.38	8.00	-12.38	Pass
2412	1	ax	6.5/7.2 (MCS0)	-7.24	8.00	-15.24	Pass
2437	6	ax	6.5/7.2 (MCS0)	-6.77	8.00	-14.77	Pass
2462	11	ax	6.5/7.2 (MCS0)	-6.73	8.00	-14.73	Pass

Table 7-11. Conducted Power Spectral Density Measurements SISO ANT1

FCC ID: A3LSMX820	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-03-R1.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 51 of 154

Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	b	1	-0.82	8.00	-8.82	Pass
2437	6	b	1	-1.78	8.00	-9.78	Pass
2462	11	b	1	-2.34	8.00	-10.34	Pass
2412	1	g	6	-5.19	8.00	-13.19	Pass
2437	6	g	6	-4.75	8.00	-12.75	Pass
2462	11	g	6	-4.45	8.00	-12.45	Pass
2412	1	n	6.5/7.2 (MCS0)	-6.04	8.00	-14.04	Pass
2437	6	n	6.5/7.2 (MCS0)	-3.26	8.00	-11.26	Pass
2462	11	n	6.5/7.2 (MCS0)	-6.30	8.00	-14.30	Pass
2412	1	ax	6.5/7.2 (MCS0)	-8.29	8.00	-16.29	Pass
2437	6	ax	6.5/7.2 (MCS0)	-6.03	8.00	-14.03	Pass
2462	11	ax	6.5/7.2 (MCS0)	-8.31	8.00	-16.31	Pass

Table 7-12. Conducted Power Spectral Density Measurements SISO ANT2


FCC ID: A3LSMX820	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-03-R1.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 52 of 154

Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	ANT 1 Power Spectral Density [dBm]	ANT 2 Power Spectral Density [dBm]	Summed MIMO Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	b	1	-2.88	-1.73	0.74	8.00	-7.26	Pass
2437	6	b	1	-2.23	-2.07	0.86	8.00	-7.14	Pass
2462	11	b	1	-1.74	-0.97	1.67	8.00	-6.33	Pass
2412	1	g	6	-8.65	-7.53	-5.04	8.00	-13.04	Pass
2437	6	g	6	-4.93	-3.47	-1.13	8.00	-9.13	Pass
2462	11	g	6	-7.64	-6.83	-4.21	8.00	-12.21	Pass
2412	1	n	6.5/7.2 (MCS0)	-6.93	-6.61	-3.76	8.00	-11.76	Pass
2437	6	n	6.5/7.2 (MCS0)	-3.01	-2.76	0.13	8.00	-7.87	Pass
2462	11	n	6.5/7.2 (MCS0)	-6.12	-6.31	-3.20	8.00	-11.20	Pass
2412	1	ax	6.5/7.2 (MCS0)	-8.26	-6.06	-4.01	8.00	-12.01	Pass
2437	6	ax	6.5/7.2 (MCS0)	-7.38	-5.96	-3.60	8.00	-11.60	Pass
2462	11	ax	6.5/7.2 (MCS0)	-8.19	-7.81	-4.99	8.00	-12.99	Pass


Table 7-13. Conducted Power Spectral Density Measurements MIMO

FCC ID: A3LSMX820	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-03-R1.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 53 of 154

7.4.1 SISO Antenna-1 Power Spectral Density Measurements

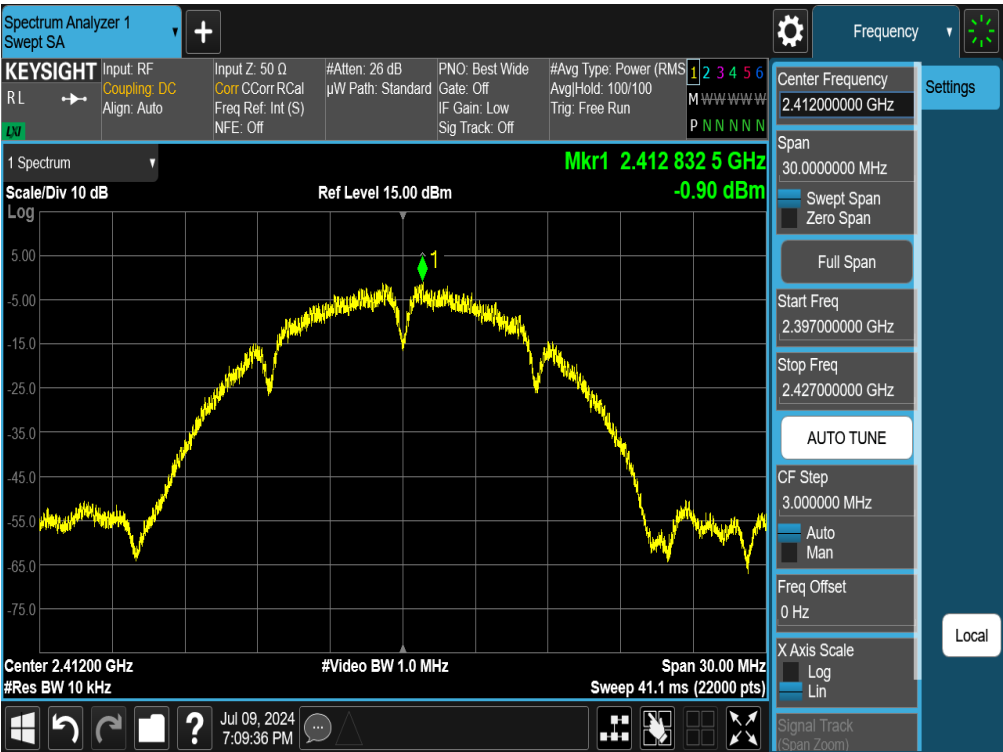


Plot 7-50. Power Spectral Density Plot SISO ANT1 (802.11b – Ch. 1)

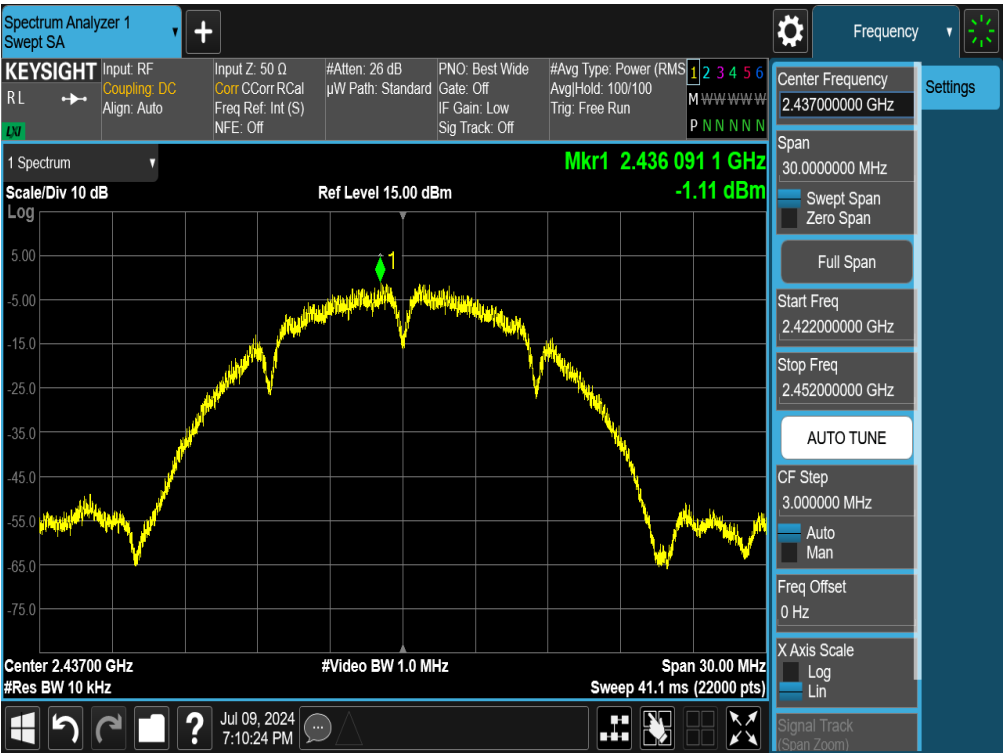


Plot 7-51. Power Spectral Density Plot SISO ANT1 (802.11b – Ch. 6)

FCC ID: A3LSMX820		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-03-R1.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 54 of 154	

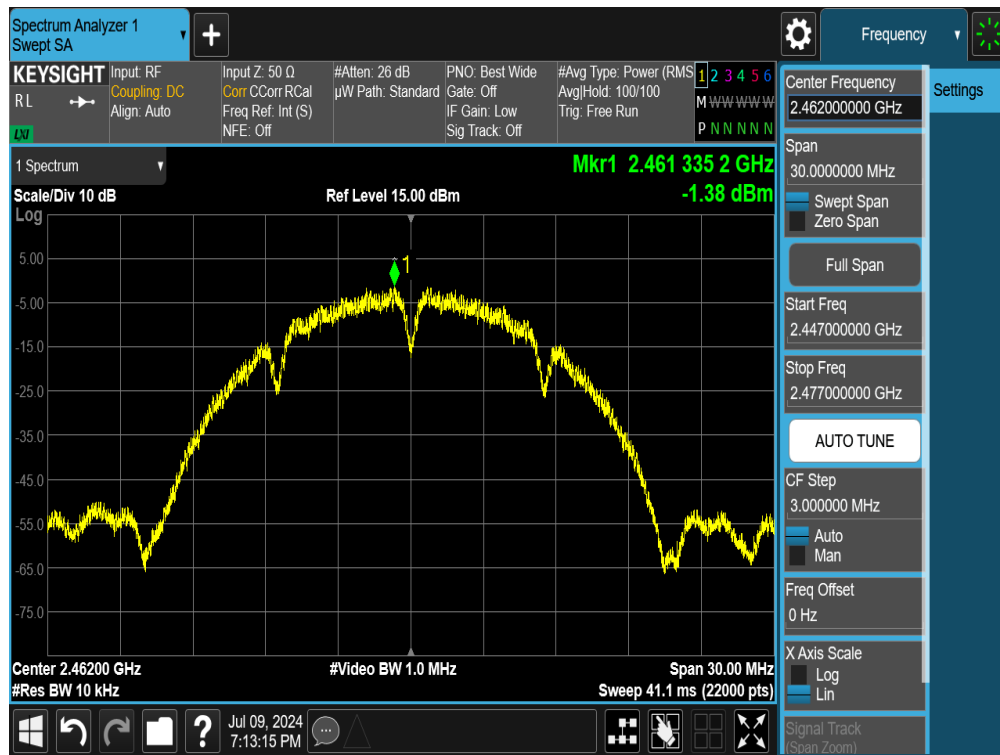


Plot 7-52. Power Spectral Density Plot SISO ANT1 (802.11b – Ch. 11)

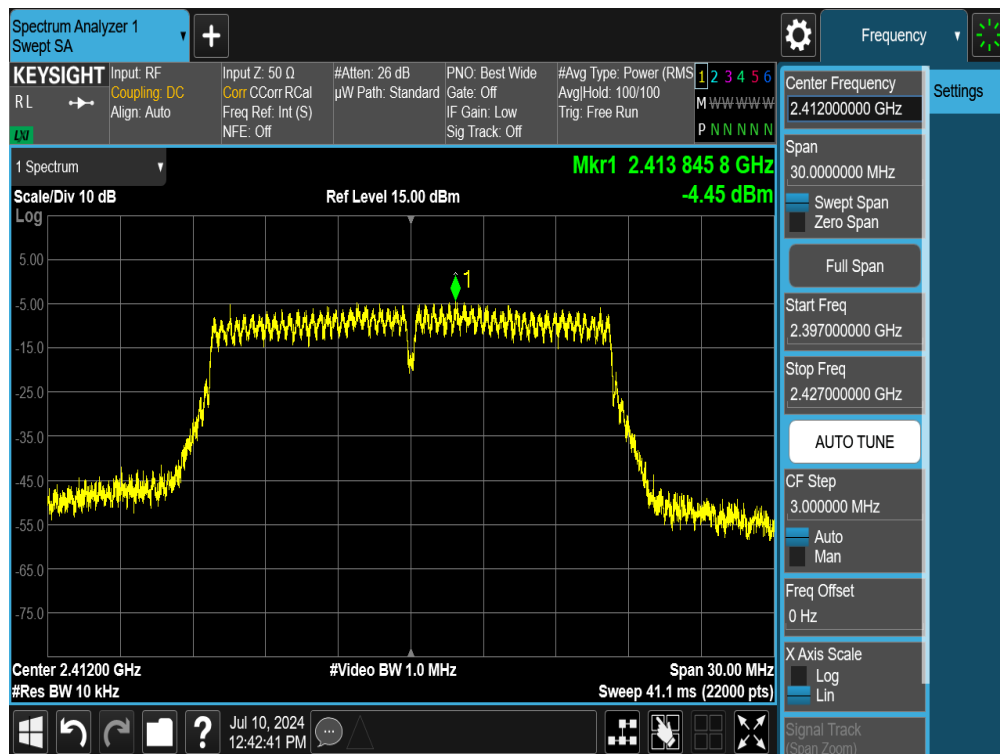


Plot 7-53. Power Spectral Density Plot SISO ANT1 (802.11g – Ch. 1)

FCC ID: A3LSMX820	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-03-R1.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 55 of 154

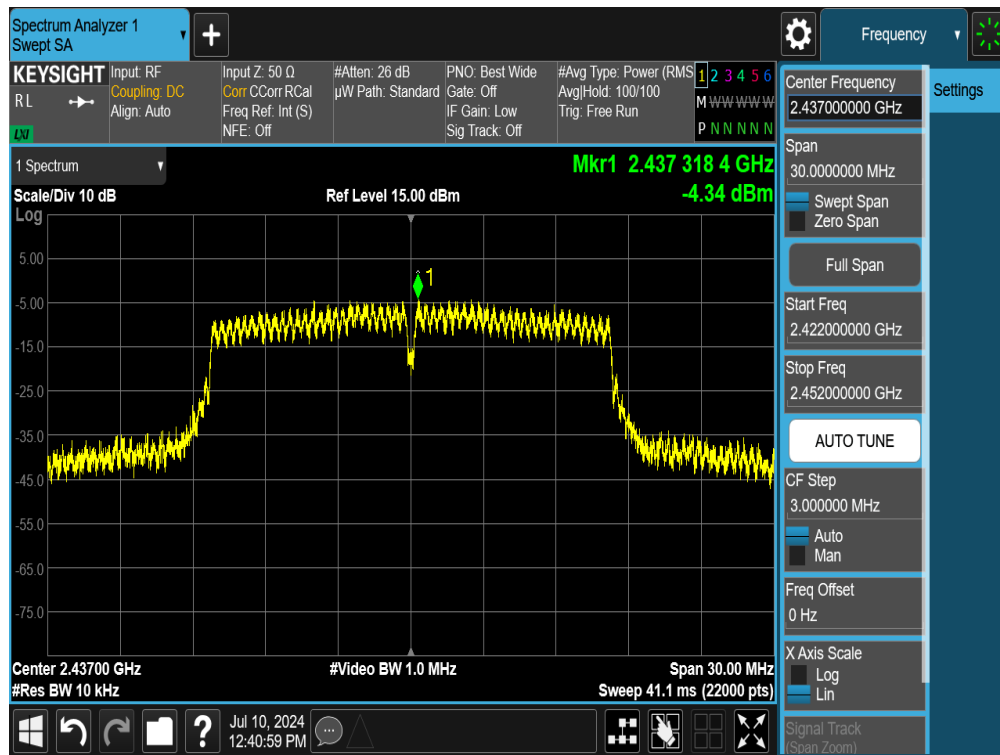


Plot 7-54. Power Spectral Density Plot SISO ANT1 (802.11g – Ch. 6)

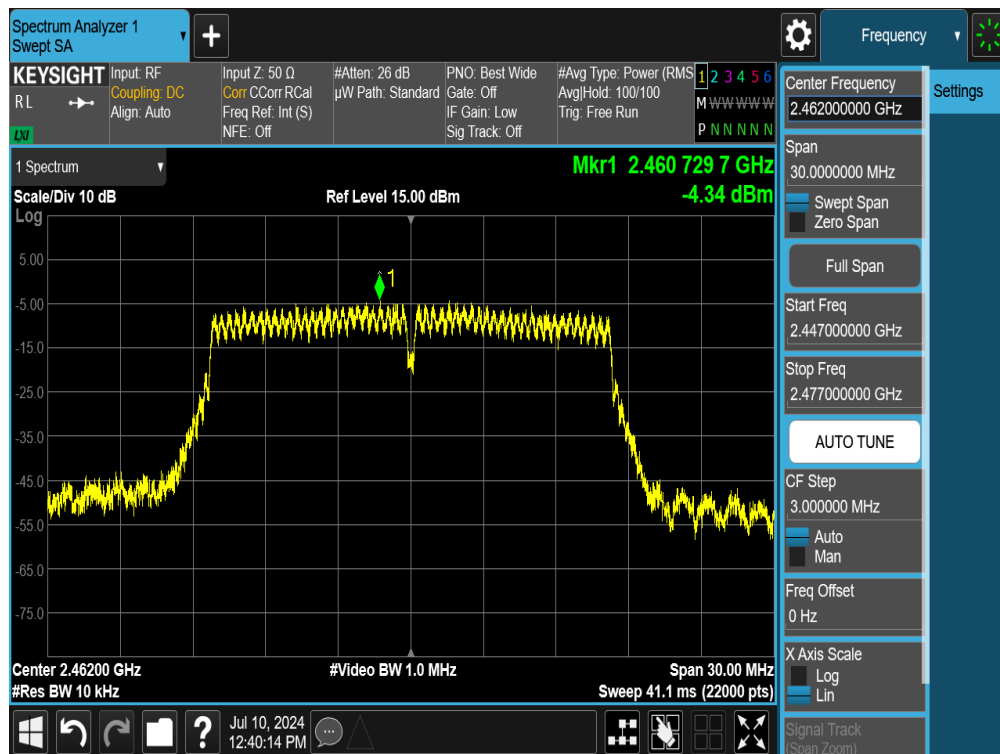


Plot 7-55. Power Spectral Density Plot SISO ANT1 (802.11g – Ch. 11)

FCC ID: A3LSMX820	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-03-R1.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 56 of 154

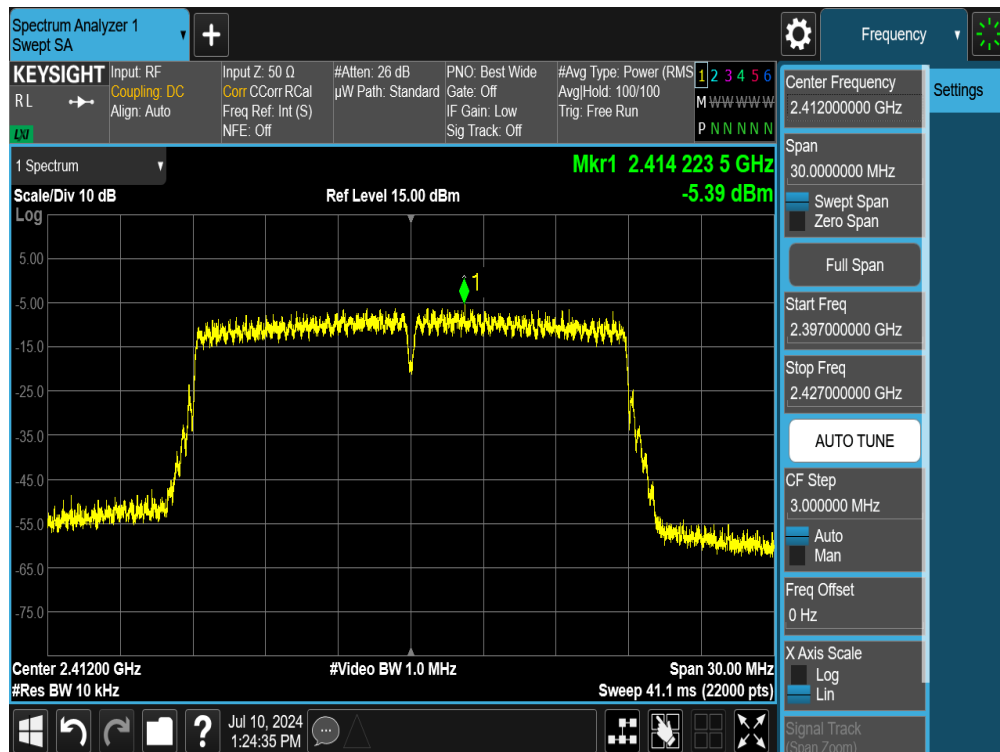


Plot 7-56. Power Spectral Density Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 1)

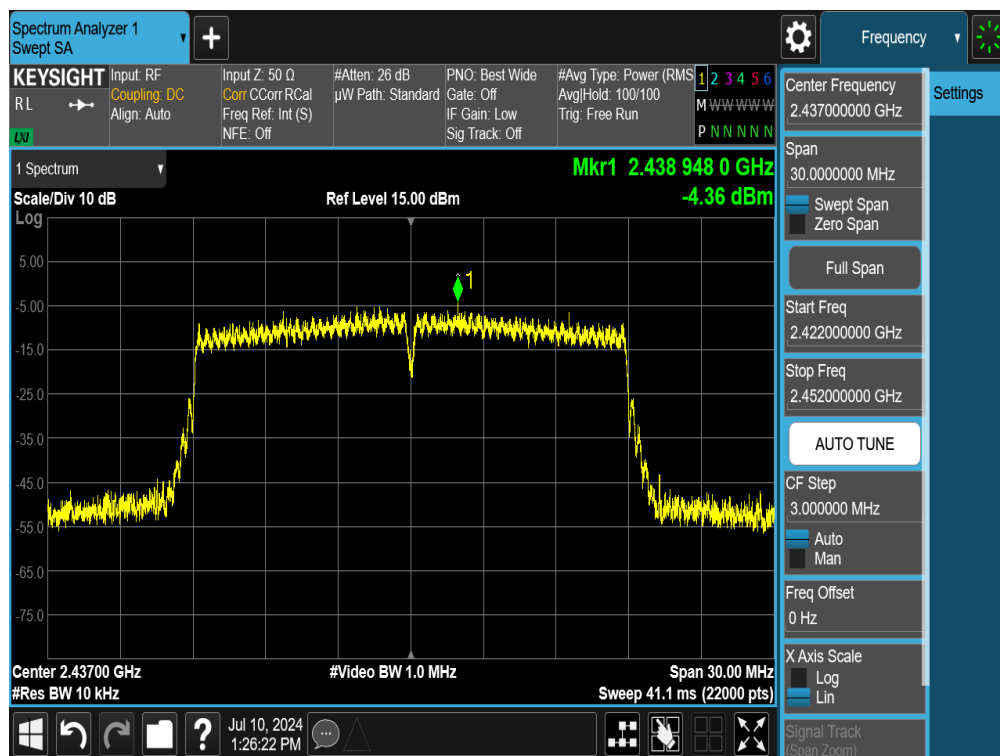


Plot 7-57. Power Spectral Density Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 6)

FCC ID: A3LSMX820	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-03-R1.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 57 of 154


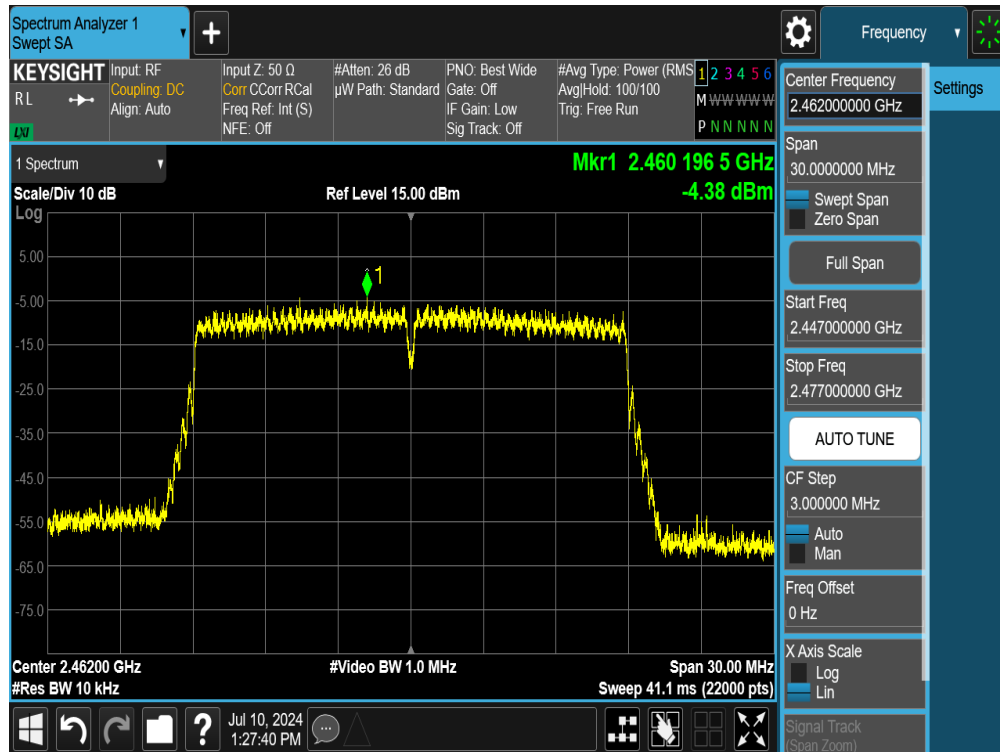


Plot 7-58. Power Spectral Density Plot SISO ANT1 (802.11n (2.4GHz) – Ch. 11)

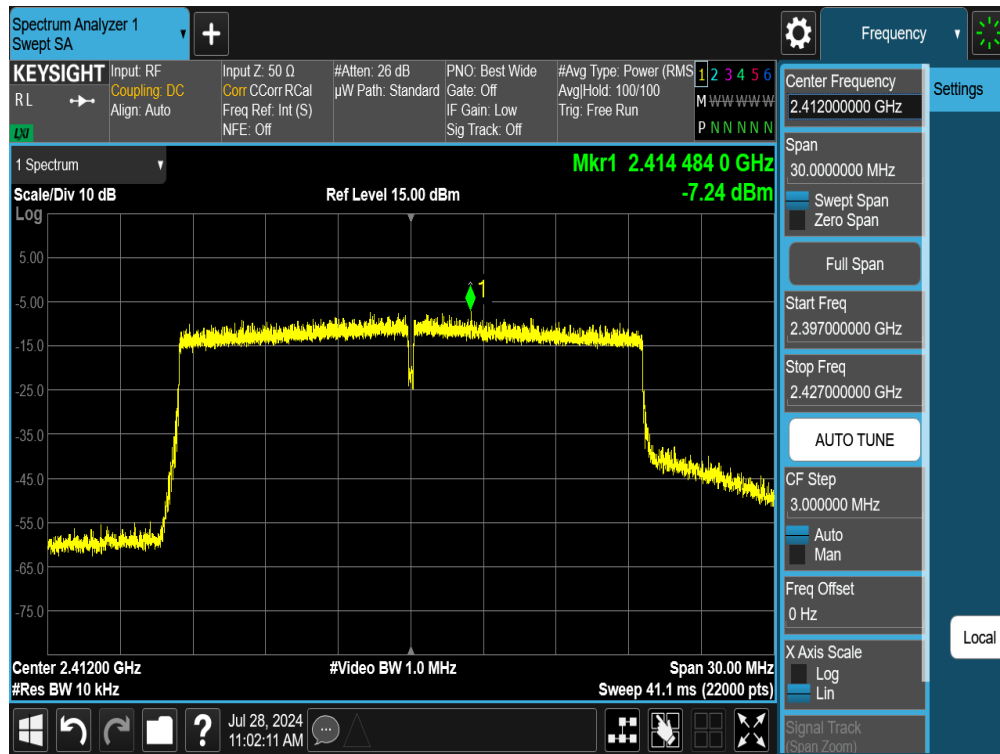


Plot 7-59. Power Spectral Density Plot SISO ANT1 (802.11ax (2.4GHz) – Ch. 1)

FCC ID: A3LSMX820	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-03-R1.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 58 of 154

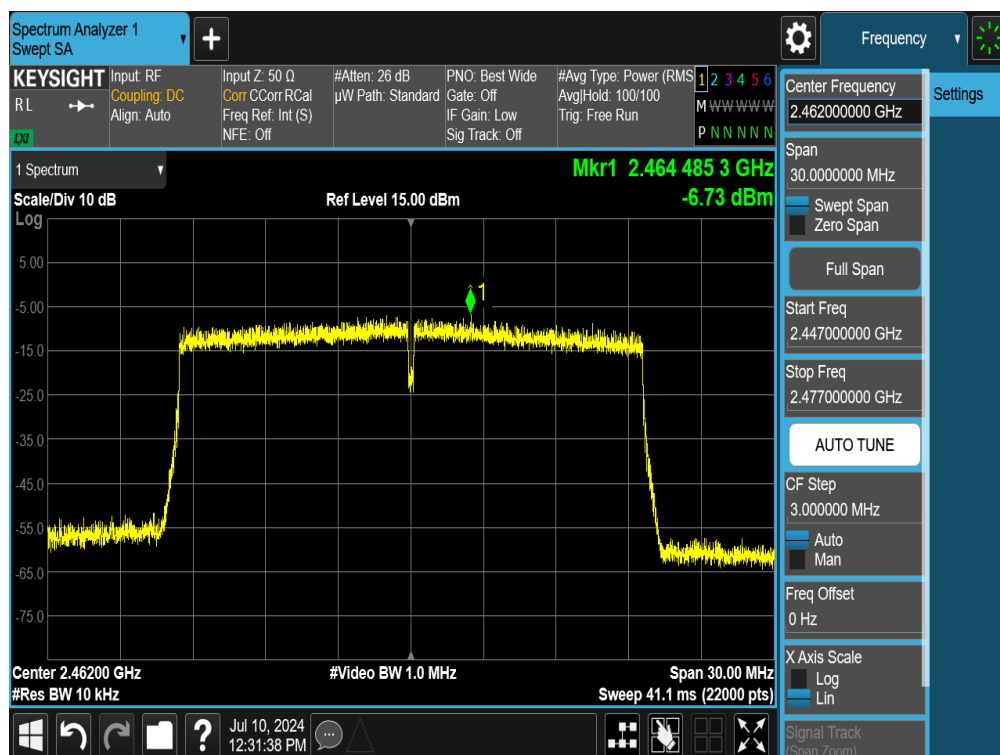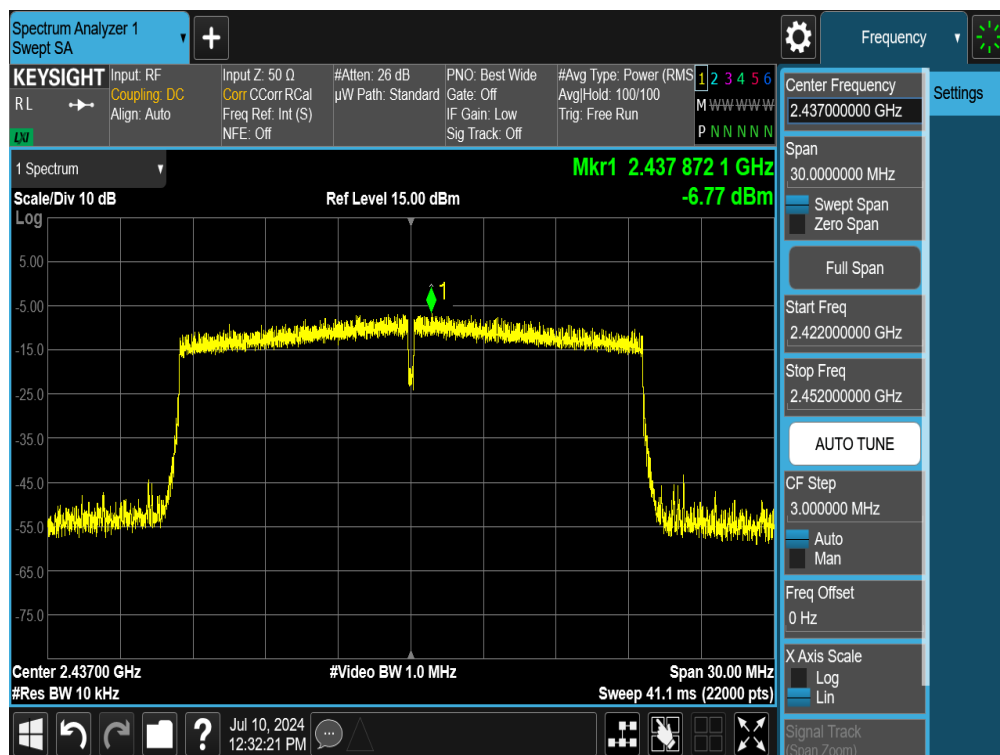


FCC ID: A3LSMX820	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-03-R1.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 59 of 154

7.4.2 SISO Antenna-2 Power Spectral Density Measurements

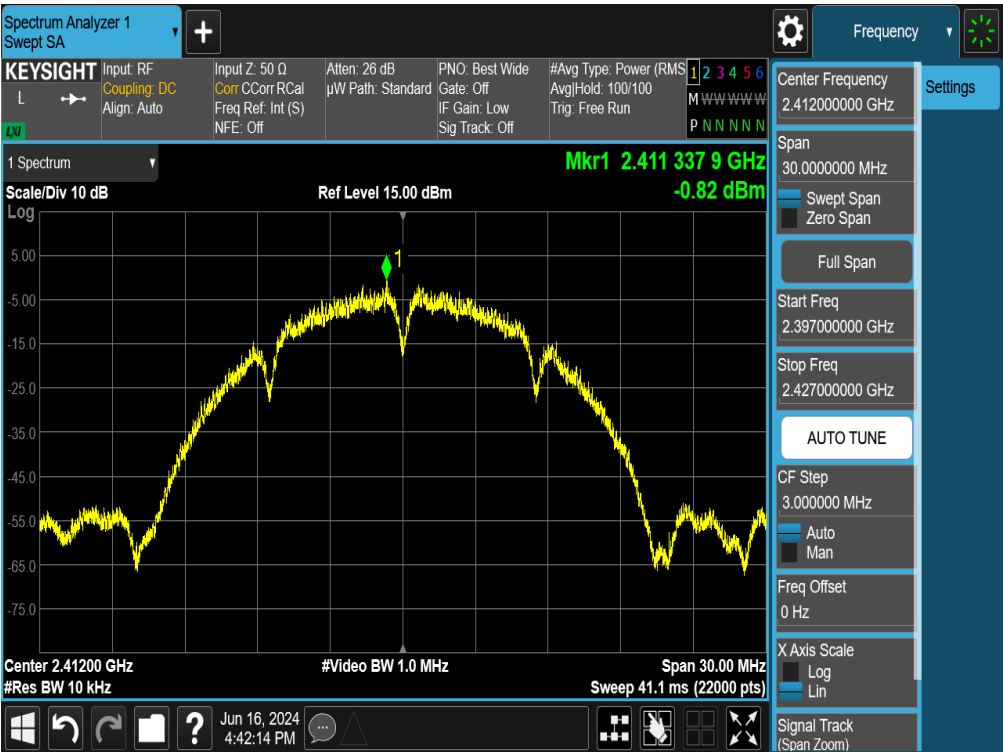


Plot 7-62. Power Spectral Density Plot SISO ANT2 (802.11b – Ch. 1)

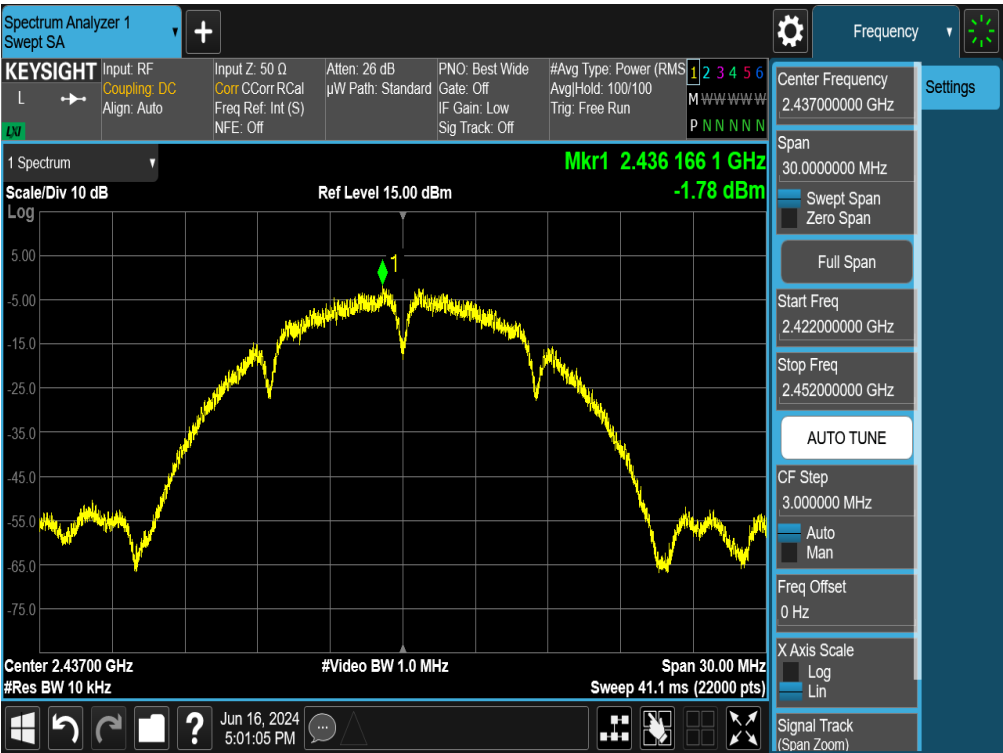


Plot 7-63. Power Spectral Density Plot SISO ANT2 (802.11b – Ch. 6)

FCC ID: A3LSMX820		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-03-R1.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 60 of 154	


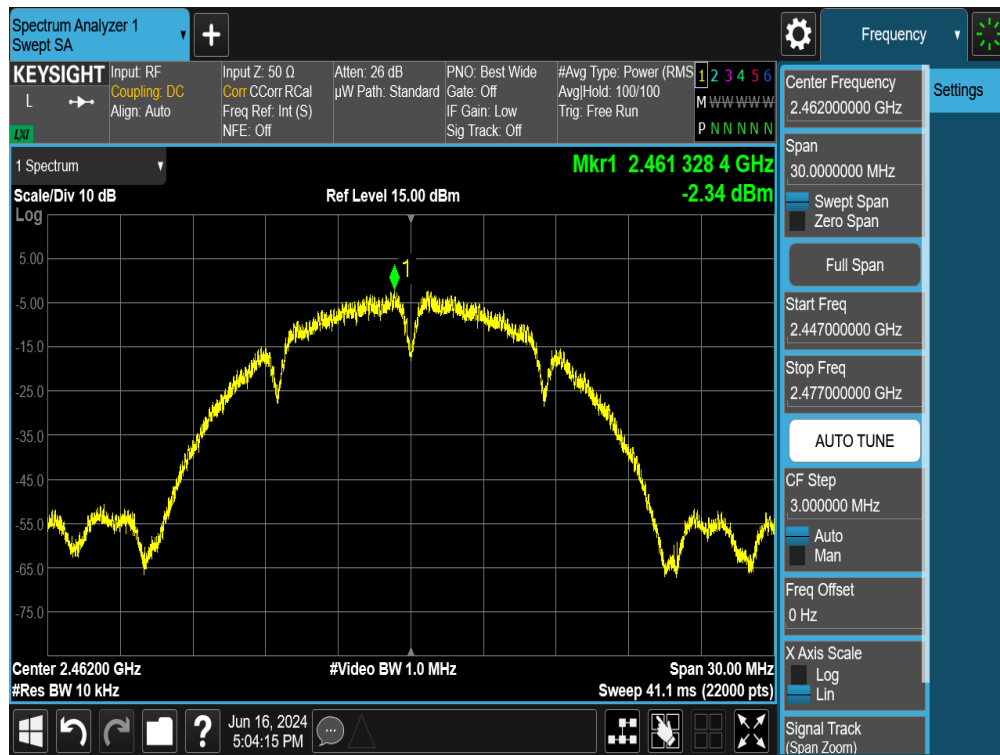


Plot 7-64. Power Spectral Density Plot SISO ANT2 (802.11b – Ch. 11)

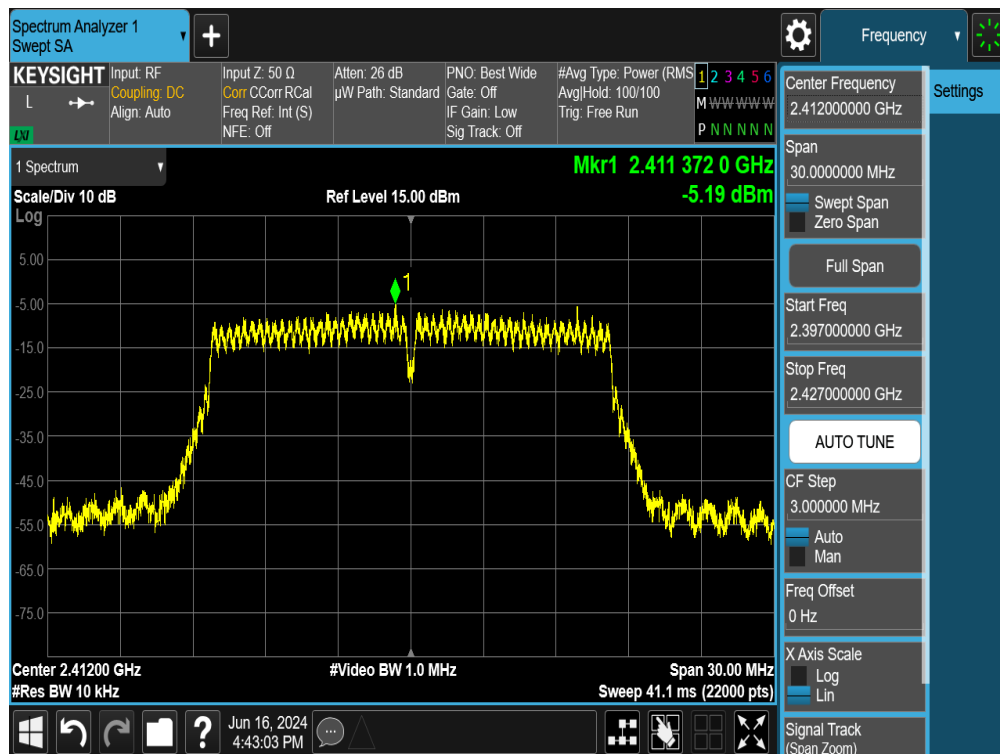


Plot 7-65. Power Spectral Density Plot SISO ANT2 (802.11g – Ch. 1)


FCC ID: A3LSMX820	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-03-R1.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 61 of 154

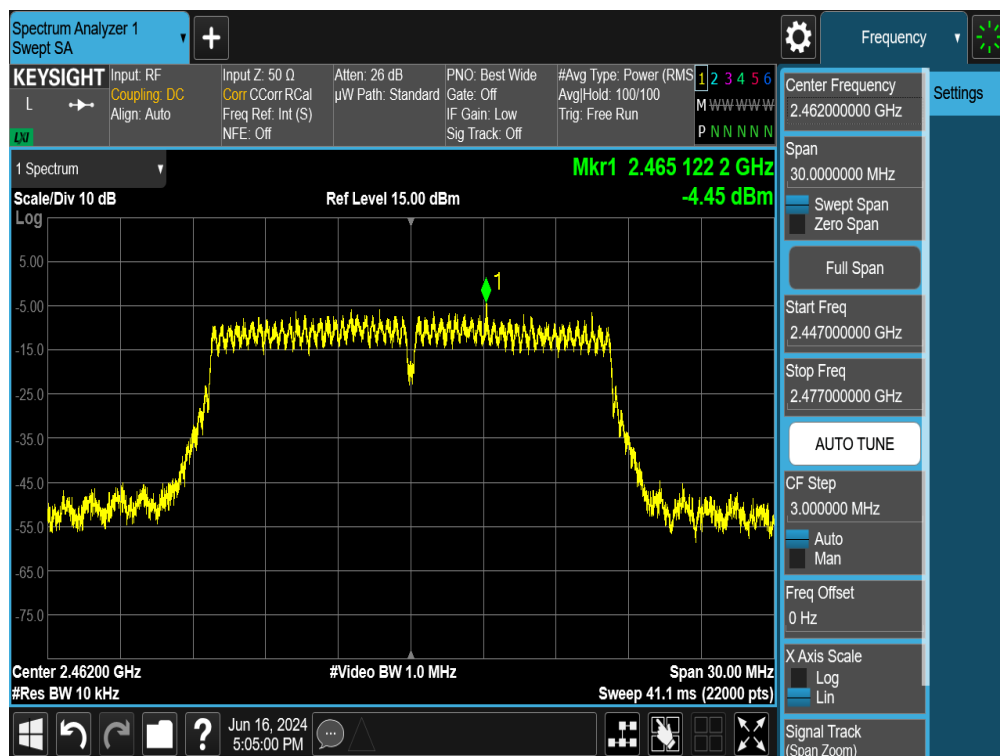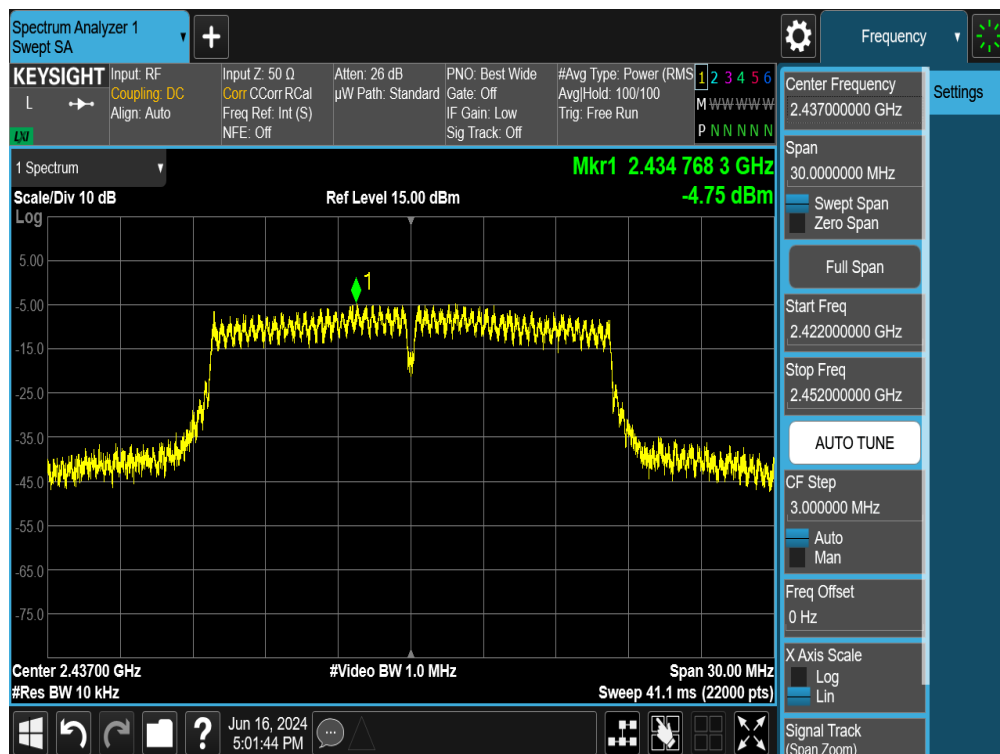

FCC ID: A3LSMX820	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-03-R1.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 62 of 154


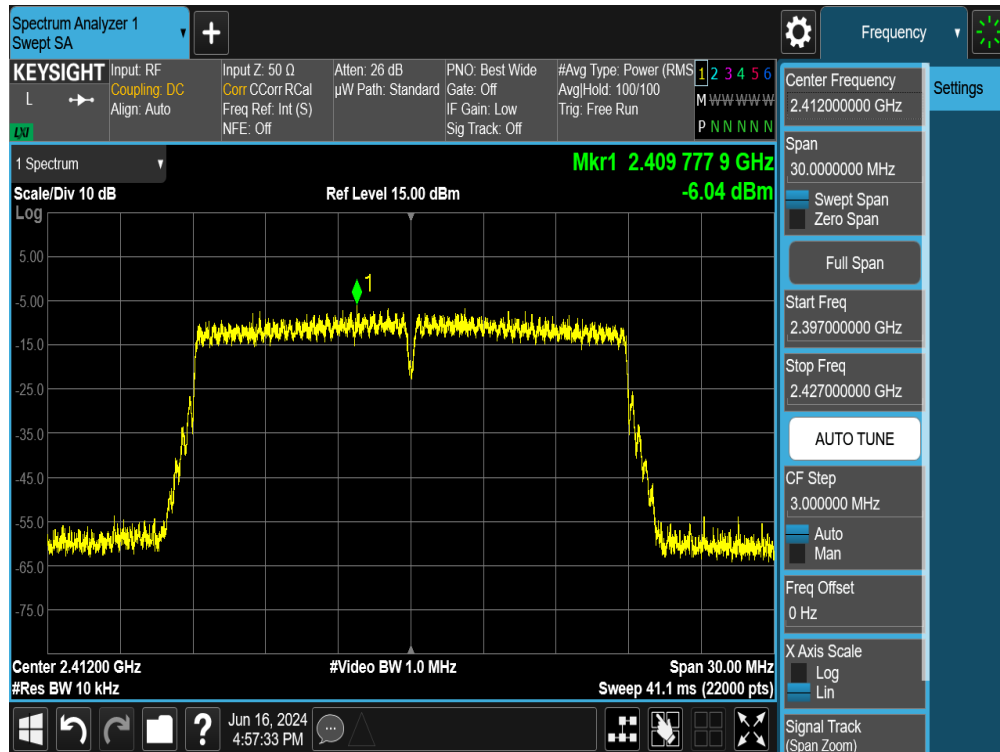


Plot 7-68. Power Spectral Density Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 1)

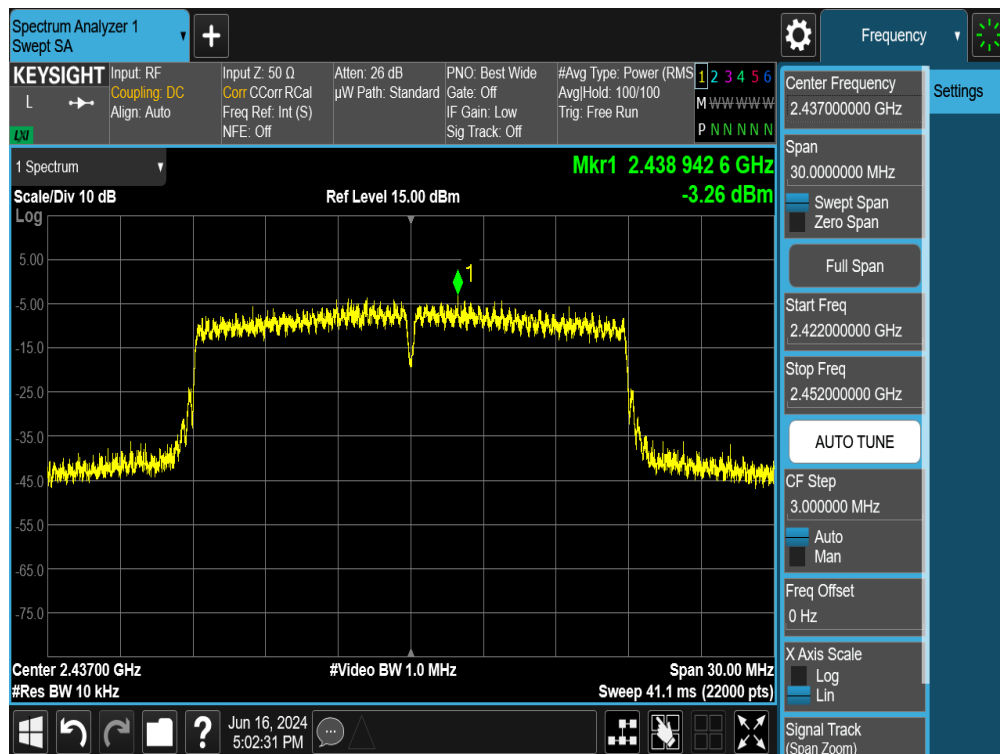


Plot 7-69. Power Spectral Density Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 6)


FCC ID: A3LSMX820	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-03-R1.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 63 of 154

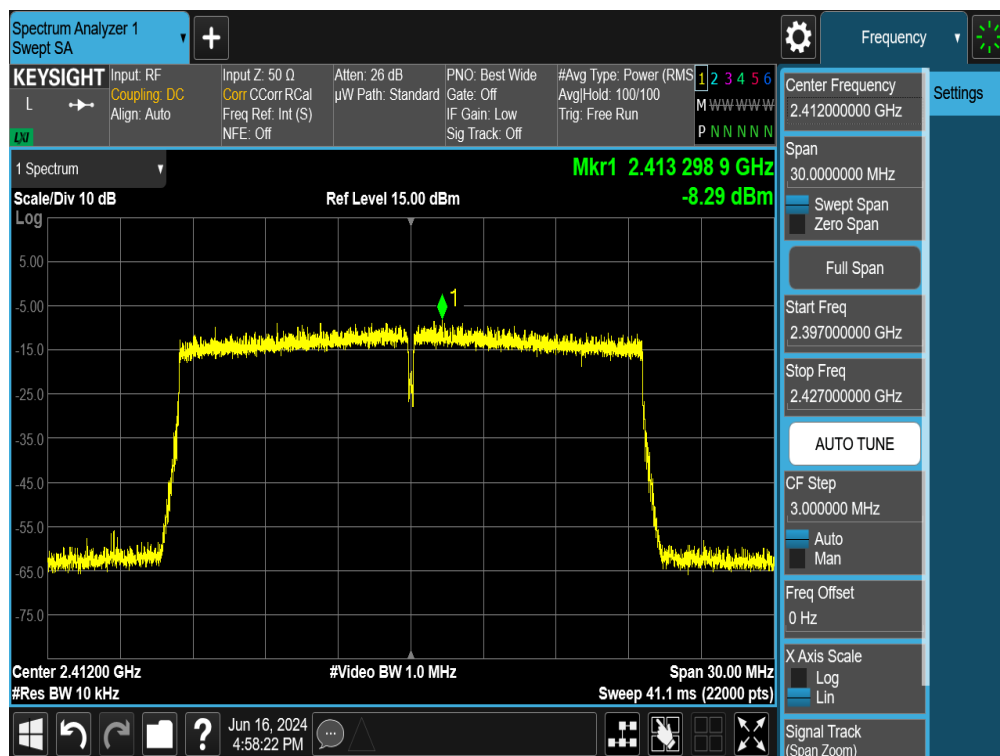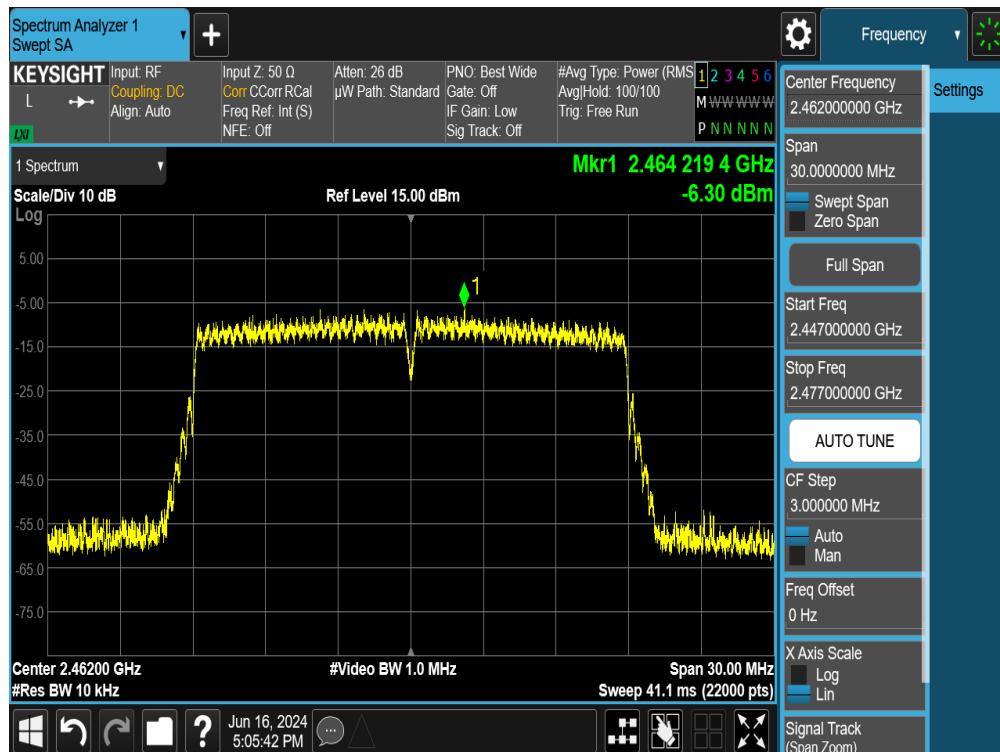

FCC ID: A3LSMX820	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-03-R1.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 64 of 154

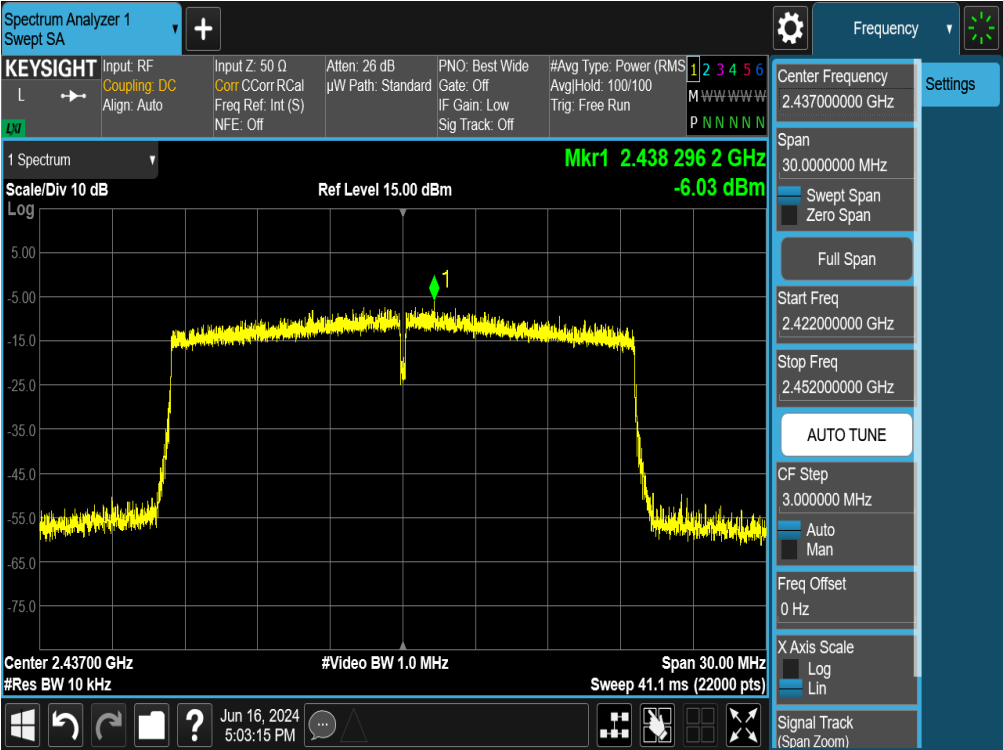


Plot 7-72. Power Spectral Density Plot SISO ANT2 (802.11ax (2.4GHz) – Ch. 6)

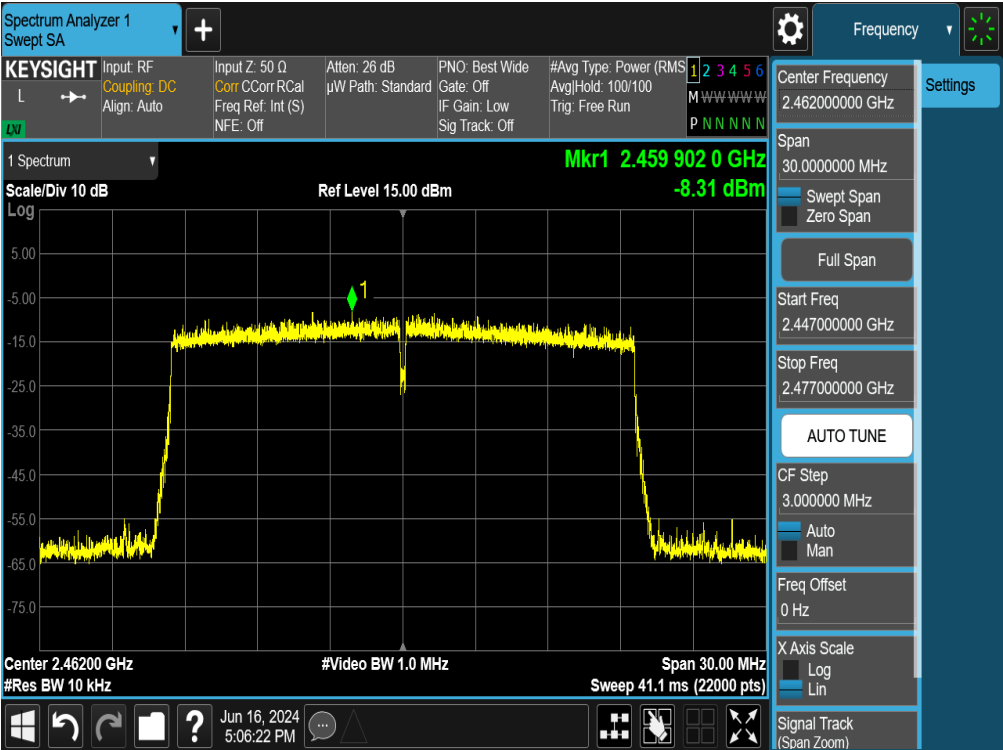


Plot 7-73. Power Spectral Density Plot SISO ANT2 (802.11ax (2.4GHz) – Ch. 11)

FCC ID: A3LSMX820	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-03-R1.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 65 of 154

7.4.3 MIMO Power Spectral Density Measurements

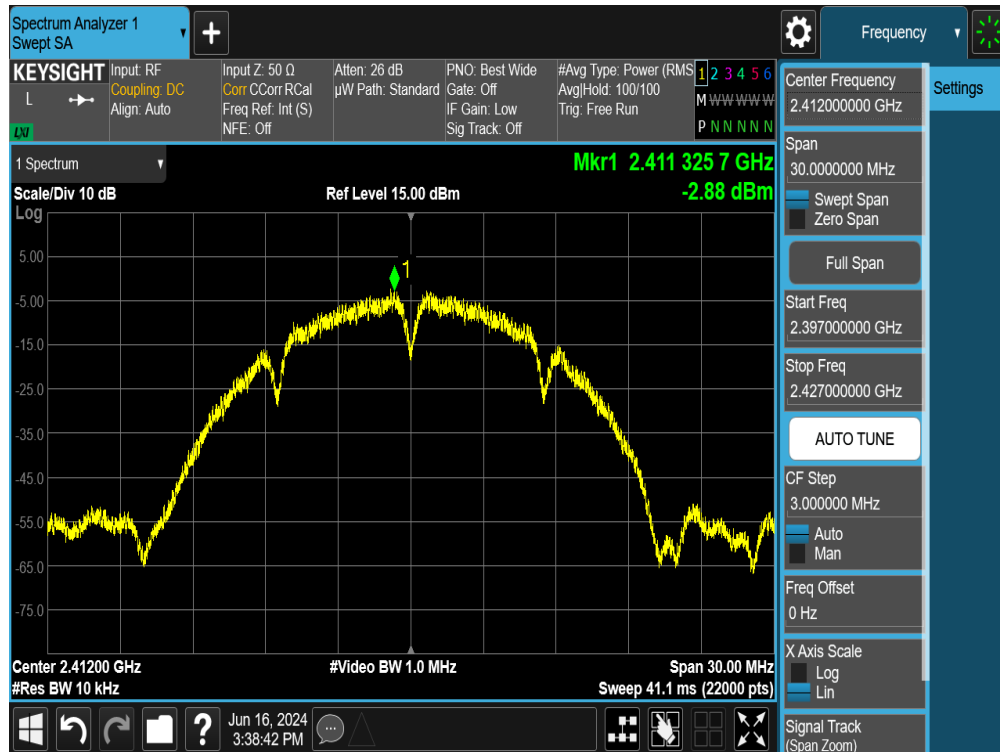


Plot 7-74. Power Spectral Density Plot MIMO ANT1 (802.11b – Ch. 1)

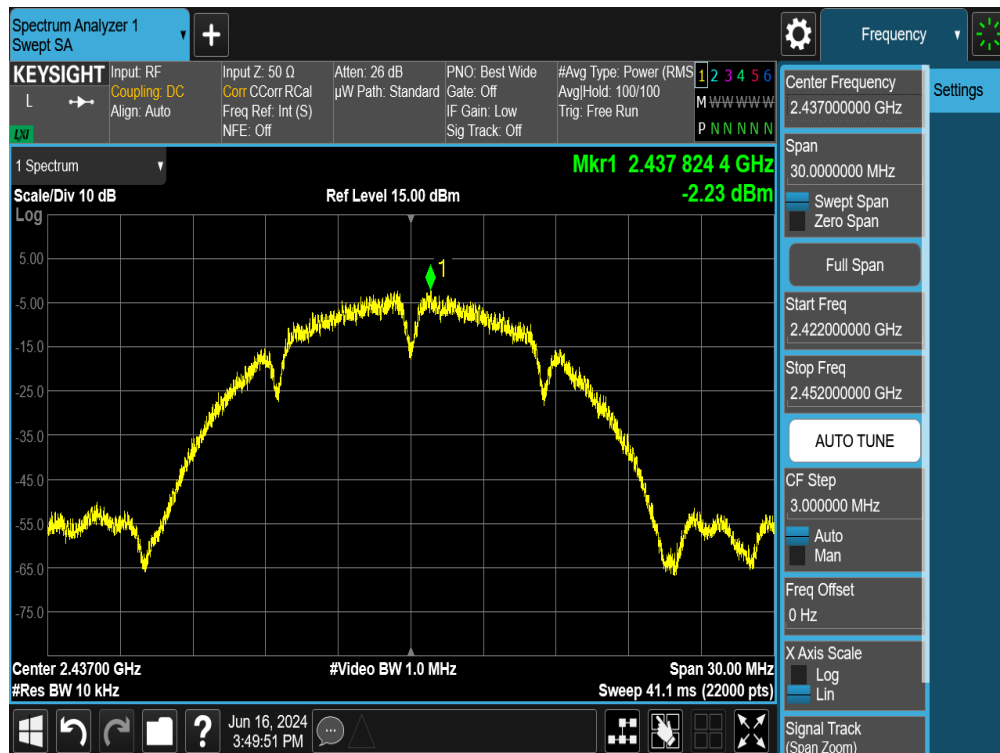


Plot 7-75. Power Spectral Density Plot MIMO ANT1 (802.11b – Ch. 6)

FCC ID: A3LSMX820	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-03-R1.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 66 of 154

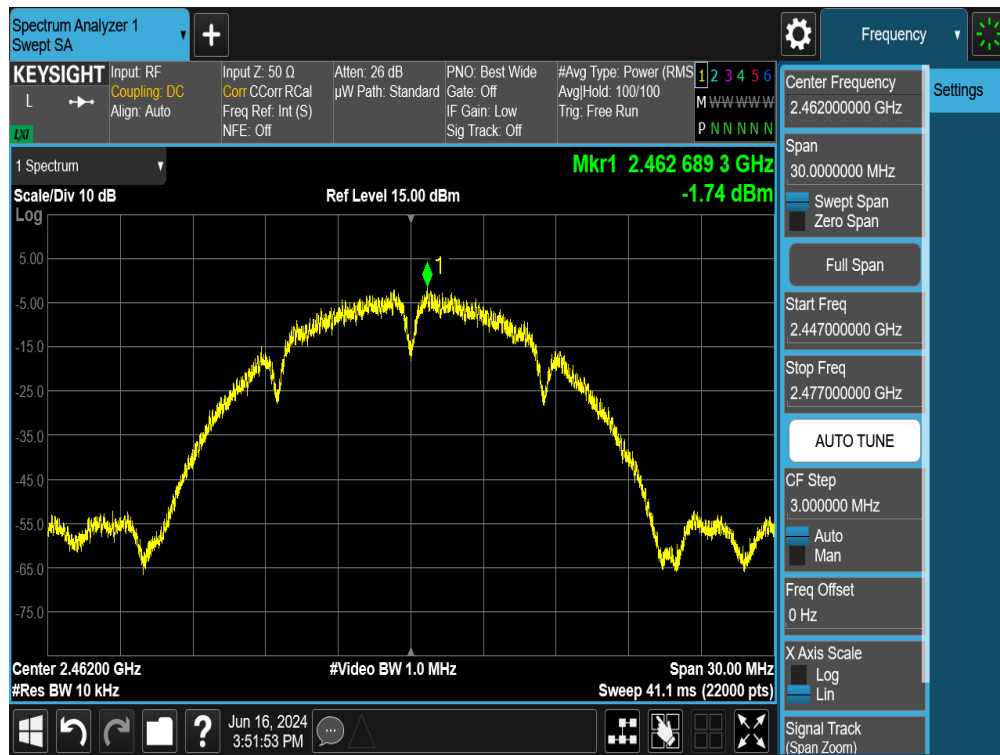


Plot 7-76. Power Spectral Density Plot MIMO ANT1 (802.11b – Ch. 11)

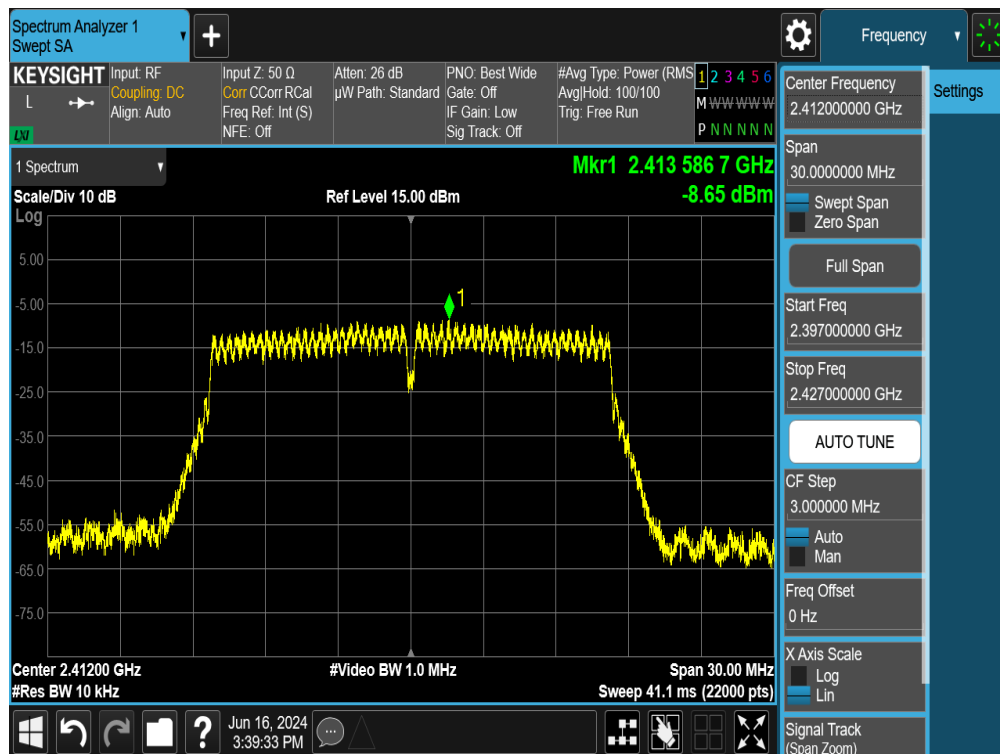


Plot 7-77. Power Spectral Density Plot MIMO ANT1 (802.11g – Ch. 1)

FCC ID: A3LSMX820	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-03-R1.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 67 of 154

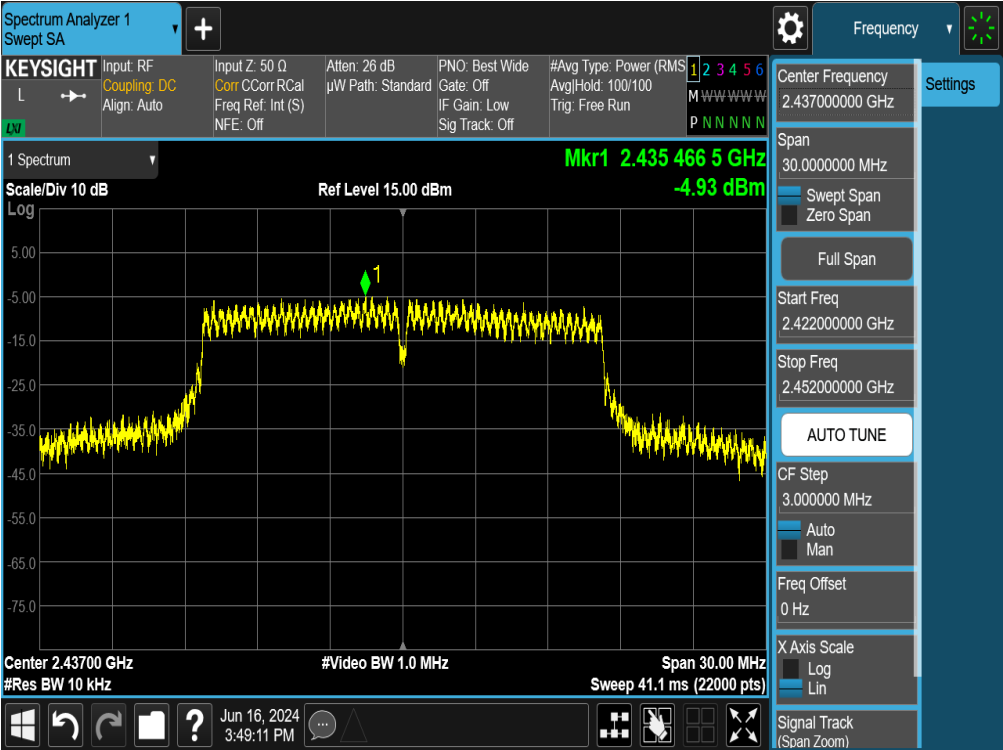


Plot 7-78. Power Spectral Density Plot MIMO ANT1 (802.11g – Ch. 6)

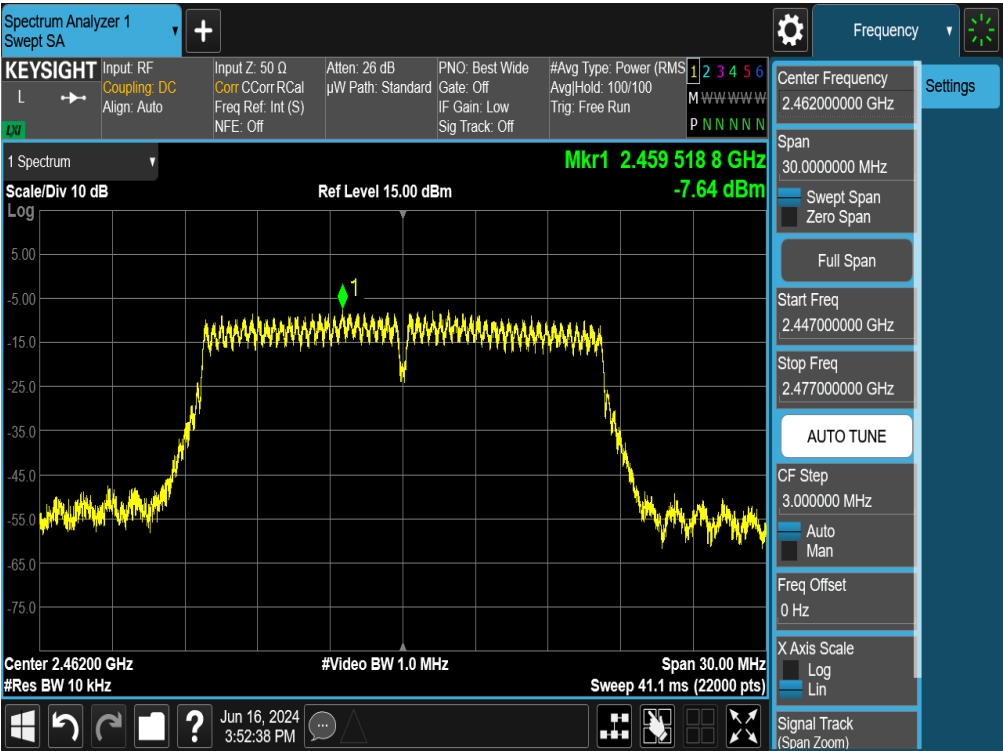


Plot 7-79. Power Spectral Density Plot MIMO ANT1 (802.11g – Ch. 11)

FCC ID: A3LSMX820	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-03-R1.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 68 of 154

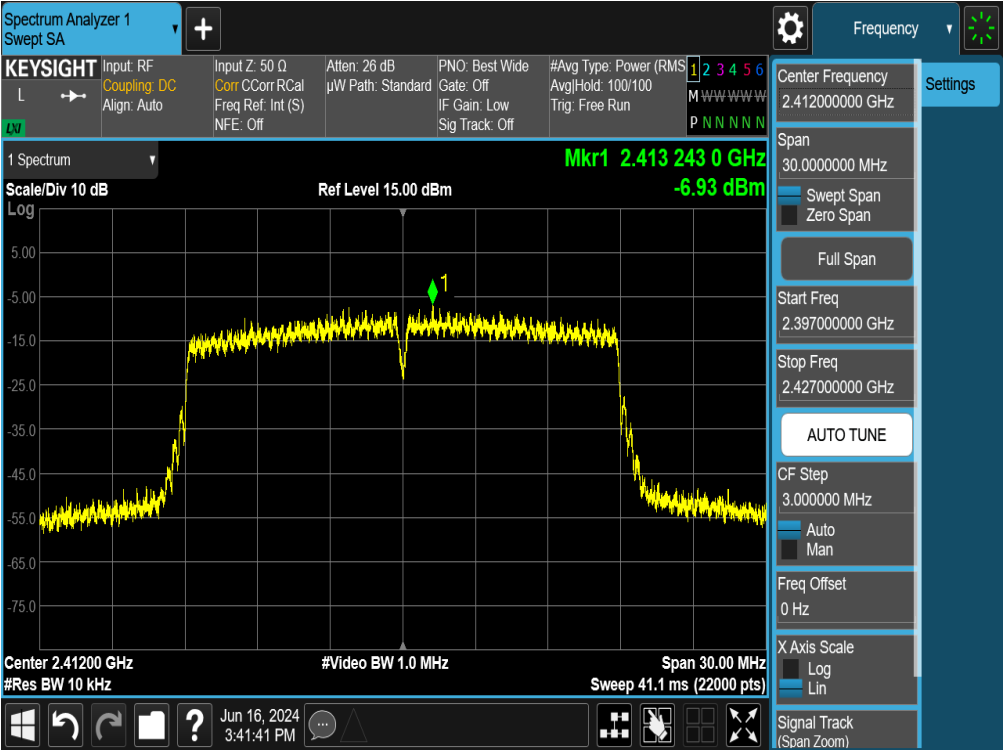


Plot 7-80. Power Spectral Density Plot MIMO ANT1 (802.11n (2.4GHz) – Ch. 1)

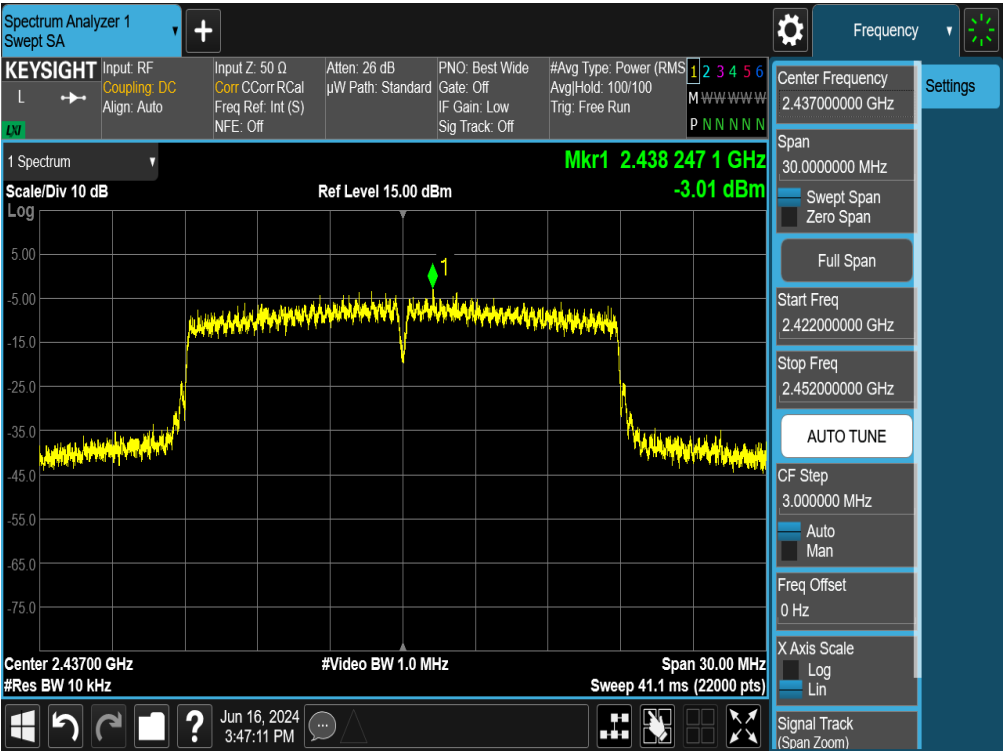


Plot 7-81. Power Spectral Density Plot MIMO ANT1 (802.11n (2.4GHz) – Ch. 6)

FCC ID: A3LSMX820	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-03-R1.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 69 of 154

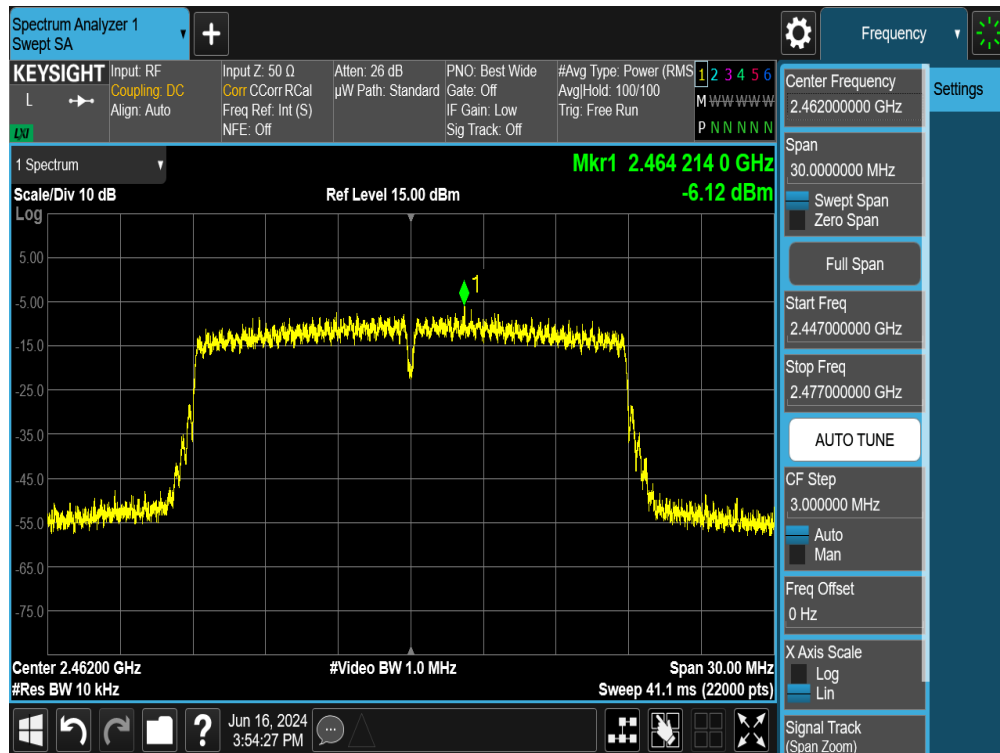


Plot 7-82. Power Spectral Density Plot MIMO ANT1 (802.11n (2.4GHz) – Ch. 11)

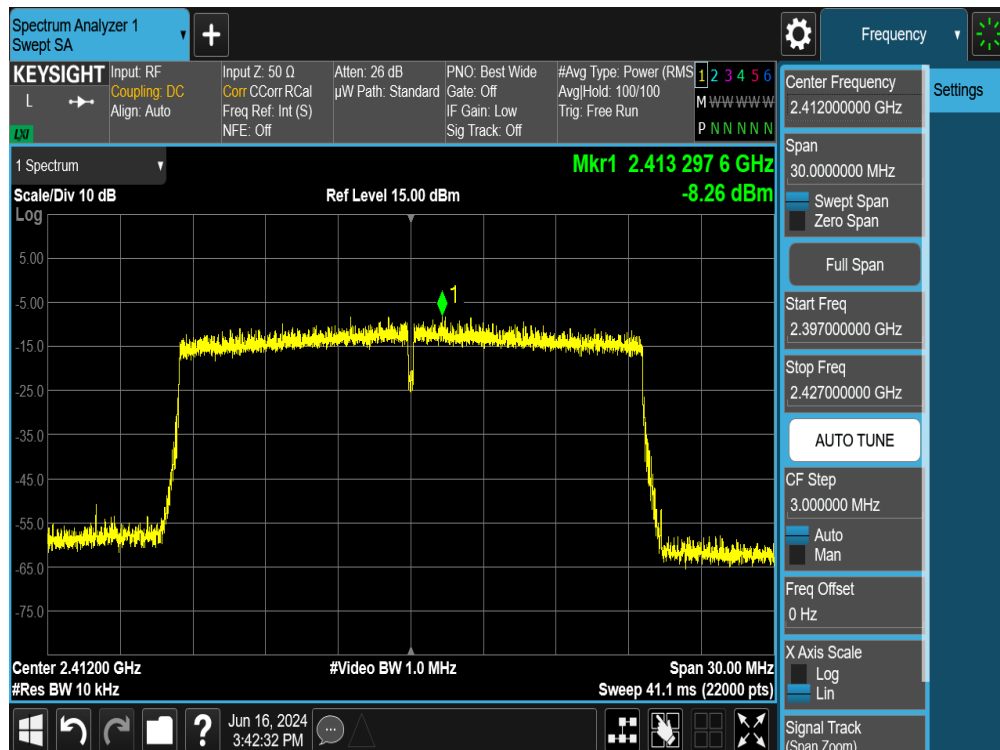


Plot 7-83. Power Spectral Density Plot MIMO ANT1 (802.11ax (2.4GHz) – Ch. 1)

FCC ID: A3LSMX820	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-03-R1.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 70 of 154

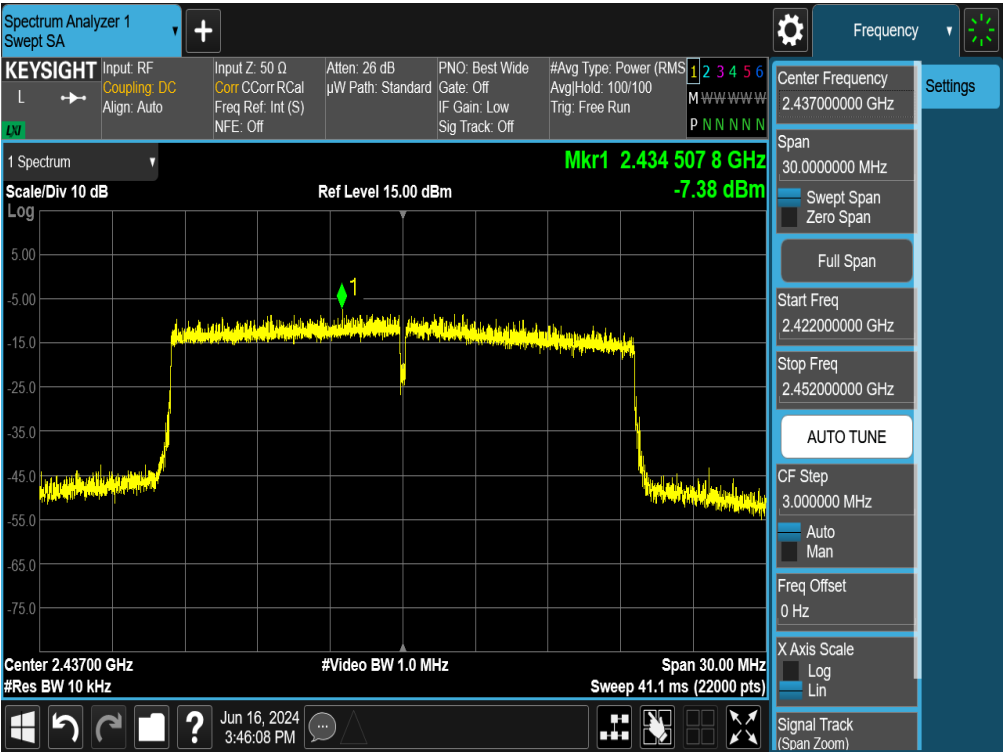


Plot 7-84. Power Spectral Density Plot MIMO ANT1 (802.11ax (2.4GHz) – Ch. 6)

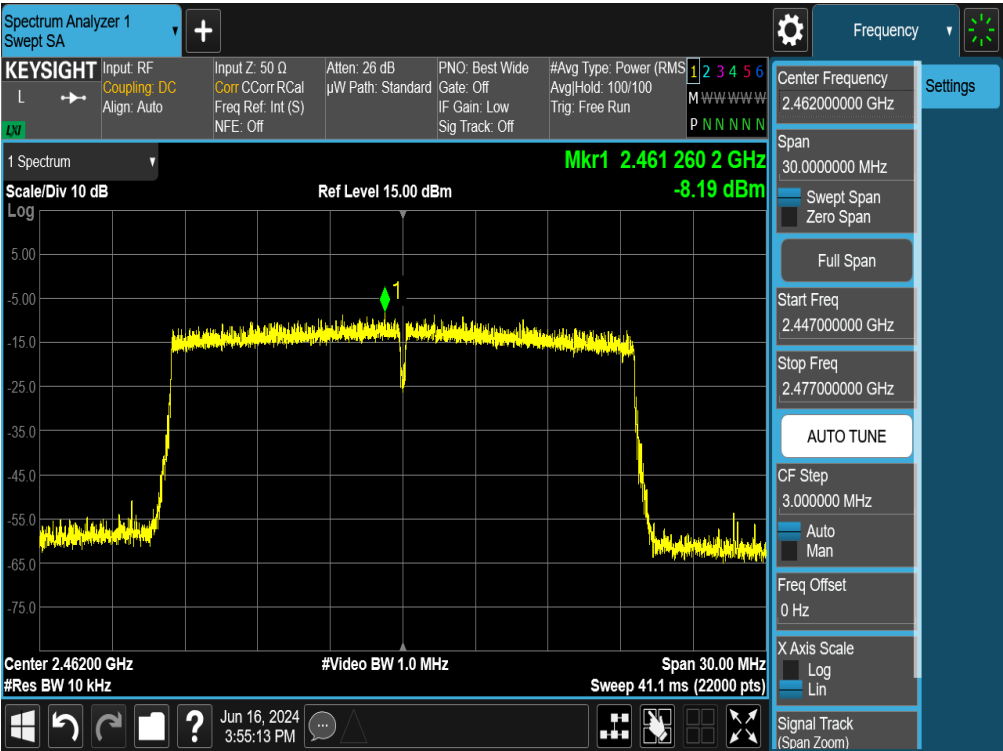

Plot 7-85. Power Spectral Density Plot MIMO ANT1 (802.11ax (2.4GHz) – Ch. 11)

FCC ID: A3LSMX820	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-03-R1.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 71 of 154

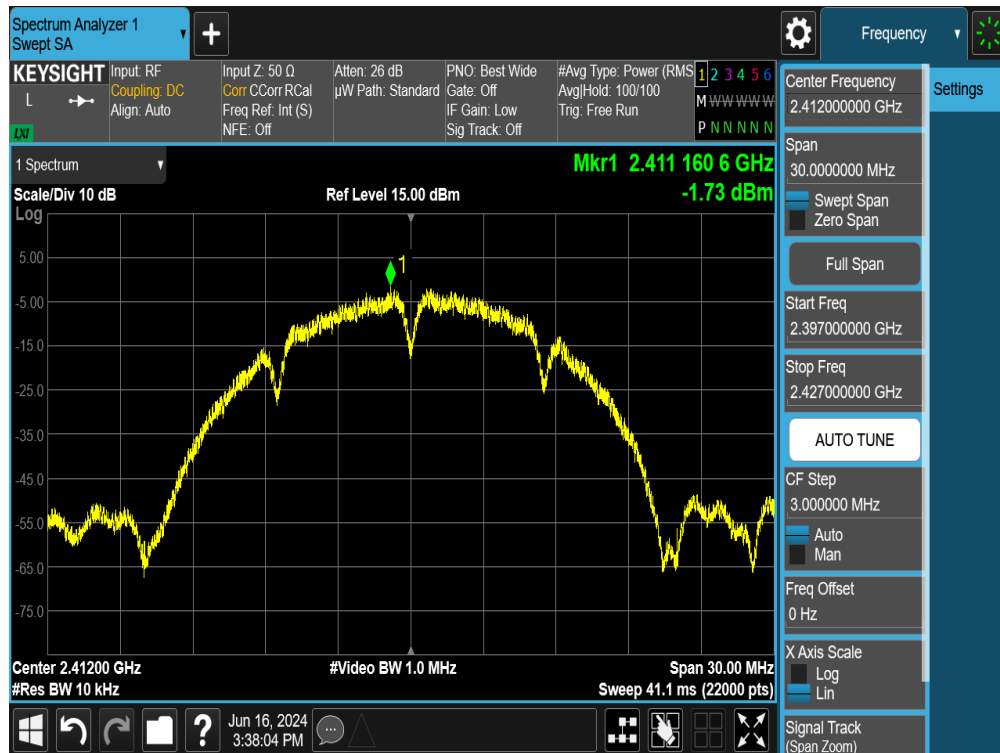

Plot 7-86. Power Spectral Density Plot MIMO ANT2 (802.11b – Ch. 1)



Plot 7-87. Power Spectral Density Plot MIMO ANT2 (802.11b – Ch. 6)

FCC ID: A3LSMX820	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140040-03-R1.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 72 of 154