



LTE Band 66

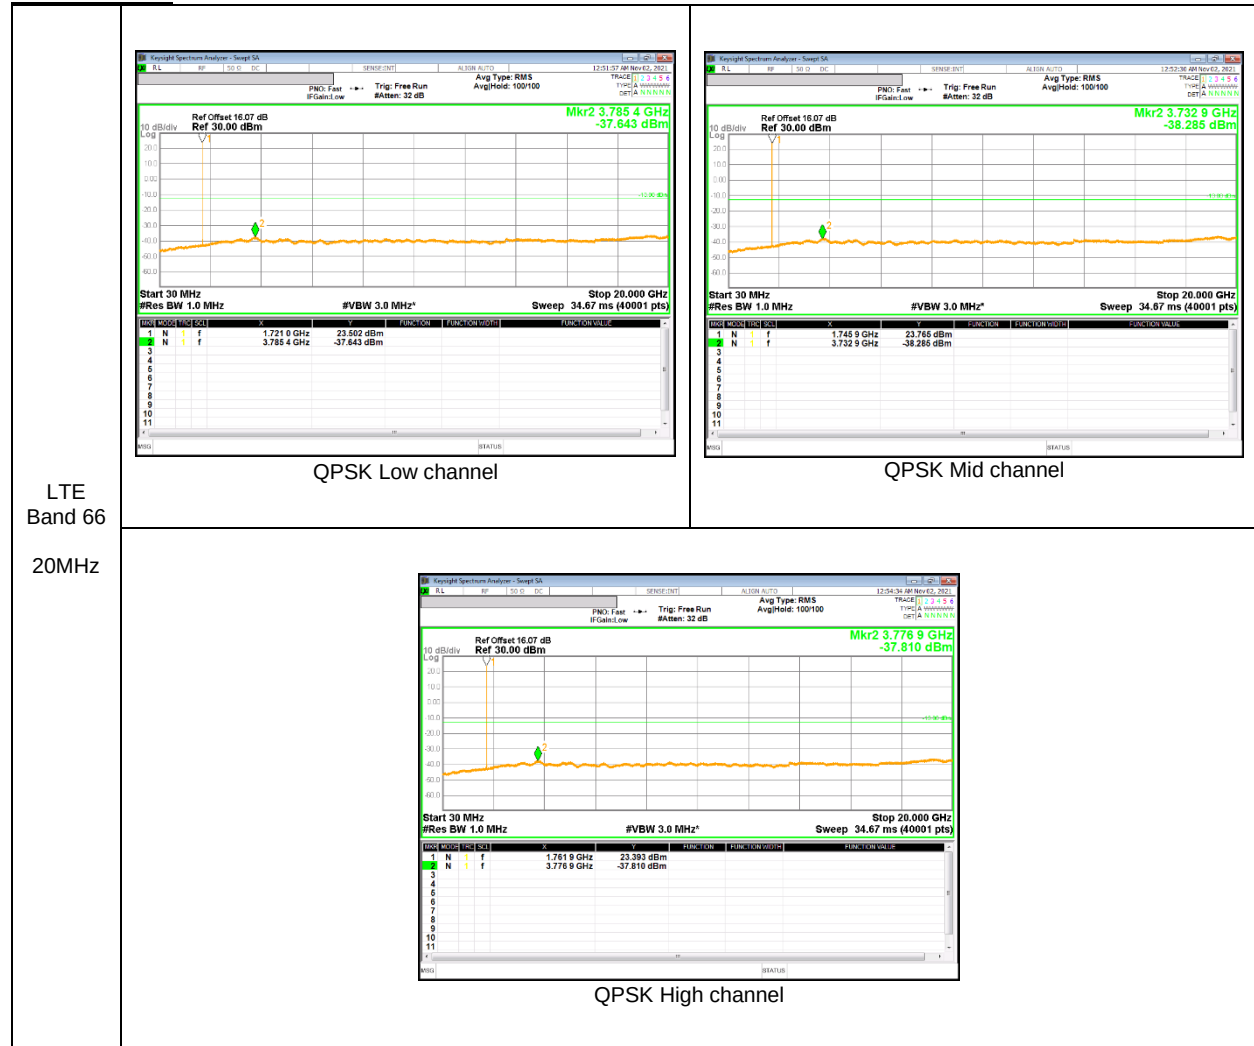

LTE
Band 66

20MHz


NR Band 5

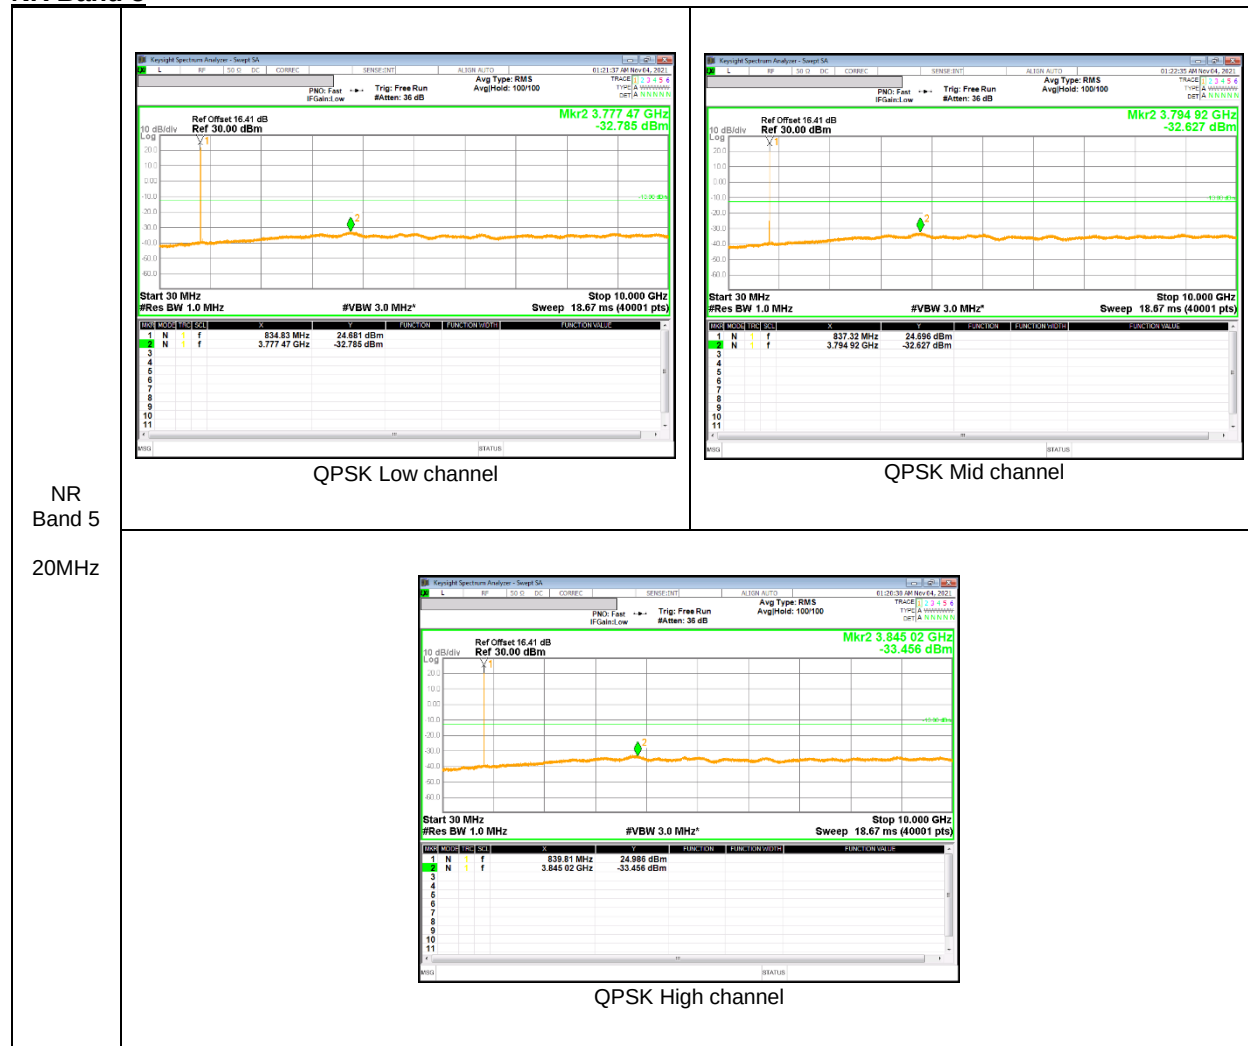

NR
Band 5

20MHz

NR Band 66

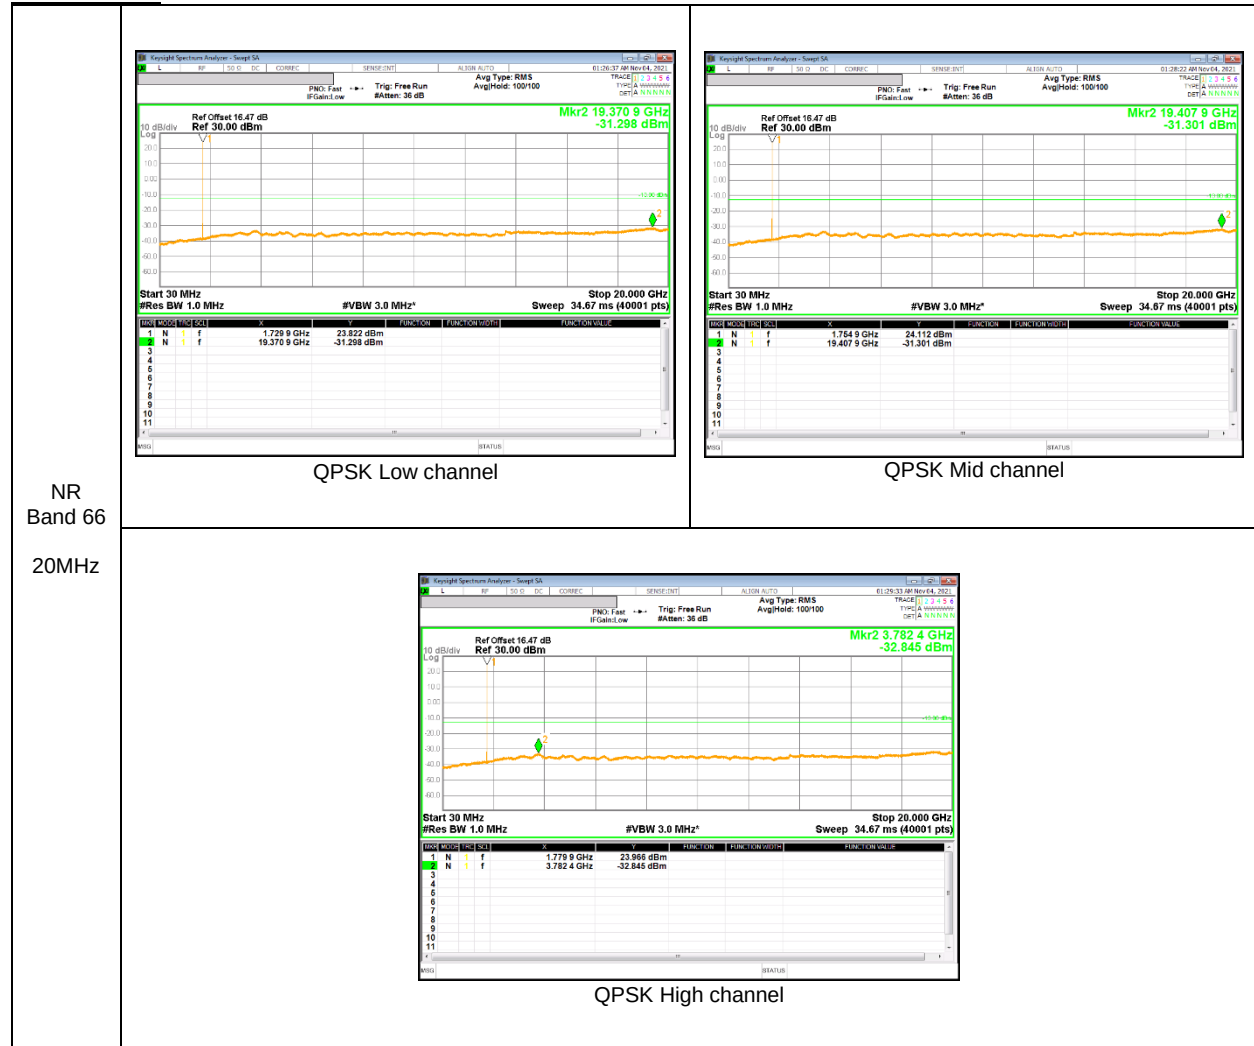

9.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54 and §90.213

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

§27.54 - The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

§90.213 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v03r01

RESULTS

See the following pages.

NOTE : Test were performed each lowest or highest frequency on the modulation condition of more wide bandwidth. (Please refer to section 9.1.1 OBW results)

9.4.1. FREQUENCY STABILITY RESULTS

GSM 850, Channel 128/251, Frequency 824.2/848.8 MHz

Reference Frequency : GSM850 Low Channel 824.2 MHz / High Channel 848.8 MHz @ 20°C						
Limit: +/- 2.5 ppm =		Low Channel	2060.500	Hz	High Channel	2122.000
		Frequency Deviation Measured with Time Elapse				
Power Supply [Vdc]	Environment Temperature [°C]	Low Channel		High Channel		Limit [ppm]
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]	
3.88	50	824.20003358	-0.002	848.80003391	-0.004	2.5
3.88	40	824.20003420	-0.003	848.80003580	-0.006	2.5
3.88	30	824.20003096	0.001	848.80003150	-0.001	2.5
3.88	20	824.20003180	0.000	848.80003050	0.000	2.5
3.88	10	824.20003435	-0.003	848.80003503	-0.005	2.5
3.88	0	824.20003737	-0.007	848.80003933	-0.010	2.5
3.88	-10	824.20003807	-0.008	848.80003897	-0.010	2.5
3.88	-20	824.20003844	-0.008	848.80003820	-0.009	2.5
3.88	-30	824.20003428	-0.003	848.80003705	-0.008	2.5

Reference Frequency : GSM850 Low Channel 824.2 MHz / High Channel 848.8 MHz @ 20°C						
Limit: +/- 2.5 ppm =		Low Channel	2060.500	Hz	High Channel	2122.000
		Frequency Deviation Measured with Time Elapse				
Power Supply [Vdc]	Environment Temperature [°C]	Low Channel		High Channel		Limit [ppm]
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]	
3.88	20	824.20003180	0	848.80003050	0	2.5
4.40	20	824.20003873	-0.008	848.80003976	-0.011	2.5
3.70	20	824.20003692	-0.006	848.80004022	-0.011	2.5

GSM 1900, Channel 512/810, Frequency 1850.0/1910.0 MHz

(Lowest Frequency:GPRS / Highest Frequency: GPRS)

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	1850.0790	1909.9235		
Extreme (50C)		1850.0790	1909.9236	44.6	0.024
Extreme (40C)		1850.0790	1909.9236	43.9	0.023
Extreme (30C)		1850.0790	1909.9236	44.6	0.024
Extreme (10C)		1850.0790	1909.9236	42.9	0.023
Extreme (0C)		1850.0790	1909.9236	45.2	0.024
Extreme (-10C)		1850.0790	1909.9236	44.9	0.024
Extreme (-20C)		1850.0790	1909.9236	62.8	0.033
Extreme (-30C)		1850.0790	1909.9236	36.3	0.019
20C	15%	1850.0790	1909.9236	52.3	0.028
	-15%	1850.0790	1909.9236	53.8	0.029
	End Point	1850.0790	1909.9236	48.1	0.026

WCDMA Band 5

Reference Frequency : WCDMA Band 5 Low Channel 826.4 MHz / High Channel 846.6 MHz @ 20°C						
Limit: +/- 2.5 ppm =		Low Channel	2066.000	Hz	High Channel	2116.500
		Frequency Deviation Measured with Time Elapse				
Power Supply [Vdc]	Environment Temperature [°C]	Low Channel		High Channel		Limit [ppm]
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]	
3.88	50	826.40001358	0.000	846.60001190	0.003	2.5
3.88	40	826.40001406	-0.001	846.60001268	0.002	2.5
3.88	30	826.40001268	0.001	846.60001308	0.002	2.5
3.88	20	826.40001350	0.000	846.60001450	0.000	2.5
3.88	10	826.40001240	0.001	846.60001367	0.001	2.5
3.88	0	826.40001191	0.002	846.60001293	0.002	2.5
3.88	-10	826.40001310	0.000	846.60001219	0.003	2.5
3.88	-20	826.40001373	0.000	846.60001094	0.004	2.5
3.88	-30	826.40001106	0.003	846.60001135	0.004	2.5

Reference Frequency : WCDMA Band 5 Low Channel 826.4 MHz / High Channel 846.6 MHz @ 20°C						
Limit: +/- 2.5 ppm =		Low Channel	2066.000	Hz	High Channel	2116.500
		Frequency Deviation Measured with Time Elapse				
Power Supply [Vdc]	Environment Temperature [°C]	Low Channel		High Channel		Limit [ppm]
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]	
3.88	20	826.40001350	0	846.60001450	0	2.5
4.40	20	826.40002827	-0.018	846.60001327	0.001	2.5
3.70	20	826.40001246	0.001	846.60001377	0.001	2.5

WCDMA Band 4 (Lowest Frequency:HSDPA / Highest Frequency: HSDPA)

Limit		1710	1755	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	1710.3192	1754.6746		
Extreme (50C)		1710.3192	1754.6746	40.7	0.023
Extreme (40C)		1710.3192	1754.6746	41.7	0.024
Extreme (30C)		1710.3192	1754.6746	42.3	0.024
Extreme (10C)		1710.3192	1754.6746	41.3	0.024
Extreme (0C)		1710.3192	1754.6746	30.3	0.017
Extreme (-10C)		1710.3192	1754.6746	40.5	0.023
Extreme (-20C)		1710.3192	1754.6746	40.8	0.024
Extreme (-30C)		1710.3192	1754.6746	29.3	0.017
20C	15%	1710.3192	1754.6746	25.8	0.015
	-15%	1710.3192	1754.6746	26.2	0.015
	End Point	1710.3192	1754.6746	26.8	0.015

WCDMA Band 2 (Lowest Frequency: Rel99 / Highest Frequency: HSDPA)

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	1850.3219	1909.6802		
Extreme (50C)		1850.3219	1909.6802	66.8	0.036
Extreme (40C)		1850.3219	1909.6802	25.6	0.014
Extreme (30C)		1850.3219	1909.6802	25.9	0.014
Extreme (10C)		1850.3219	1909.6802	66.1	0.035
Extreme (0C)		1850.3219	1909.6802	68.1	0.036
Extreme (-10C)		1850.3219	1909.6802	68.0	0.036
Extreme (-20C)		1850.3219	1909.6802	25.6	0.014
Extreme (-30C)		1850.3219	1909.6802	24.6	0.013
20C	15%	1850.3219	1909.6802	22.8	0.012
	-15%	1850.3219	1909.6802	24.2	0.013
	End Point	1850.3219	1909.6802	21.7	0.012

LTE Band 12 (Lowest Frequency: 16QAM / Highest Frequency: QPSK)

Limit		699	716	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	699.1536	715.8457		
Extreme (50C)		699.1536	715.8457	33.3	0.047
Extreme (40C)		699.1536	715.8457	32.8	0.046
Extreme (30C)		699.1536	715.8457	32.0	0.045
Extreme (10C)		699.1536	715.8457	34.6	0.049
Extreme (0C)		699.1536	715.8457	32.5	0.046
Extreme (-10C)		699.1536	715.8457	33.2	0.047
Extreme (-20C)		699.1536	715.8457	31.7	0.045
Extreme (-30C)		699.1536	715.8457	33.3	0.047
20C	15%	699.1536	715.8457	37.4	0.053
	-15%	699.1536	715.8457	25.3	0.036
	End Point	699.1536	715.8457	25.2	0.036

LTE Band 13 (Lowest Frequency:QPSK / Highest Frequency: QPSK)

Limit		777	787	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	777.2546	786.7556		
Extreme (50C)		777.2546	786.7556	38.9	0.050
Extreme (40C)		777.2546	786.7556	40.6	0.052
Extreme (30C)		777.2546	786.7556	39.7	0.051
Extreme (10C)		777.2546	786.7556	41.4	0.053
Extreme (0C)		777.2546	786.7556	37.7	0.048
Extreme (-10C)		777.2546	786.7556	45.0	0.058
Extreme (-20C)		777.2546	786.7556	42.6	0.055
Extreme (-30C)		777.2546	786.7556	34.2	0.044
20C	15%	777.2546	786.7556	32.9	0.042
	-15%	777.2546	786.7556	29.4	0.038
	End Point	777.2546	786.7556	30.2	0.039

LTE Band 25 (Lowest Frequency:16QAM / Highest Frequency: QPSK)

Limit		1850	1915	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	1850.1533	1914.8448		
Extreme (50C)		1850.1533	1914.8448	20.7	0.011
Extreme (40C)		1850.1533	1914.8448	22.0	0.012
Extreme (30C)		1850.1533	1914.8448	22.6	0.012
Extreme (10C)		1850.1533	1914.8448	24.6	0.013
Extreme (0C)		1850.1533	1914.8448	20.7	0.011
Extreme (-10C)		1850.1533	1914.8448	22.4	0.012
Extreme (-20C)		1850.1533	1914.8448	27.7	0.015
Extreme (-30C)		1850.1533	1914.8448	20.7	0.011
20C	15%	1850.1533	1914.8449	66.8	0.035
	-15%	1850.1533	1914.8449	58.8	0.031
	End Point	1850.1533	1914.8449	60.3	0.032

LTE Band 26

Reference Frequency : LTE Band 26 Low Channel 814.7 MHz / High Channel 848.3 MHz @ 20°C						
Limit: +/- 2.5 ppm =		Low Channel	2036.750	Hz	High Channel	2120.750
		Frequency Deviation Measured with Time Elapse				
Power Supply [Vdc]	Environment Temperature [°C]	Low Channel		High Channel		Limit [ppm]
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]	
3.85	50	814.70002405	0.012	848.30003280	0.000	2.5
3.85	40	814.70002268	0.013	848.30002090	0.014	2.5
3.85	30	814.70002584	0.010	848.30002670	0.008	2.5
3.85	20	814.70003360	0.000	848.30003315	0.000	2.5
3.85	10	814.70004007	-0.008	848.30004144	-0.010	2.5
3.85	0	814.70003780	-0.005	848.30003129	0.002	2.5
3.85	-10	814.70003871	-0.006	848.30003757	-0.005	2.5
3.85	-20	814.70003307	0.001	848.30003603	-0.003	2.5
3.85	-30	814.70001250	0.026	848.30002208	0.013	2.5

Reference Frequency : LTE Band 26 Low Channel 814.7 MHz / High Channel 848.3 MHz @ 20°C						
Limit: +/- 2.5 ppm =		Low Channel	2036.750	Hz	High Channel	2120.750
		Frequency Deviation Measured with Time Elapse				
Power Supply [Vdc]	Environment Temperature [°C]	Low Channel		High Channel		Limit [ppm]
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]	
3.88	20	814.70003360	0	848.30003315	0	2.5
4.40	20	814.70003141	0.003	848.30003211	0.001	2.5
3.70	20	814.70003117	0.003	848.30003017	0.004	2.5

LTE Band 41 PC2 (Lowest Frequency:16QAM / Highest Frequency: QPSK)

Limit		2496	2690	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	2496.2475	2689.7507	40.3	0.016
Extreme (50C)		2496.2475	2689.7507		
Extreme (40C)		2496.2475	2689.7507		
Extreme (30C)		2496.2475	2689.7507		
Extreme (10C)		2496.2475	2689.7507		
Extreme (0C)		2496.2475	2689.7507		
Extreme (-10C)		2496.2475	2689.7507		
Extreme (-20C)		2496.2475	2689.7507		
Extreme (-30C)		2496.2475	2689.7507		
20C	15%	2496.2475	2689.7507	40.6	0.016
	-15%	2496.2475	2689.7507	32.5	0.013
	End Point	2496.2475	2689.7507	36.3	0.014

LTE Band 66 (Lowest Frequency: 16QAM / Highest Frequency: 16QAM)

Limit		1710	1780	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	1710.6995	1779.3005		
Extreme (50C)		1710.6995	1779.3006	31.2	0.018
Extreme (40C)		1710.6995	1779.3006	32.4	0.019
Extreme (30C)		1710.6995	1779.3006	33.1	0.019
Extreme (10C)		1710.6995	1779.3006	17.3	0.010
Extreme (0C)		1710.6995	1779.3006	30.8	0.018
Extreme (-10C)		1710.6995	1779.3006	24.5	0.014
Extreme (-20C)		1710.6995	1779.3006	18.3	0.010
Extreme (-30C)		1710.6995	1779.3006	25.9	0.015
20C	15%	1710.6995	1779.3006	61.6	0.035
	-15%	1710.6995	1779.3006	55.9	0.032
	End Point	1710.6995	1779.3006	60.9	0.035

NR Band 5

Reference Frequency : NR Band 5 Low Channel 824.7 MHz / High Channel 848.3 MHz @ 20°C							
Limit: +- 2.5 ppm =		Low Channel	2061.750	Hz	High Channel	2120.750	Hz
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse					Limit [ppm]
		Low Channel		High Channel			
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]		
3.88	50	824.70002615	0.004	848.30003008	0.005	2.5	
3.88	40	824.70003420	-0.006	848.30002297	0.013	2.5	
3.88	30	824.70002418	0.007	848.30003335	0.001	2.5	
3.88	20	824.70002955	0.000	848.30003428	0.000	2.5	
3.88	10	824.70002613	0.004	848.30003070	0.004	2.5	
3.88	0	824.70002838	0.001	848.30002934	0.006	2.5	
3.88	-10	824.70003128	-0.002	848.30003050	0.004	2.5	
3.88	-20	824.70002927	0.000	848.30002385	0.012	2.5	
3.88	-30	824.70002580	0.005	848.30002614	0.010	2.5	

Reference Frequency : NR Band 5 Low Channel 824.7 MHz / High Channel 848.3 MHz @ 20°C						
Limit: +- 2.5 ppm =	Low Channel	2061.750	Hz	High Channel	2120.750	Hz
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse				Limit [ppm]
		Low Channel		High Channel		
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]	
3.88	20	824.70002955	0	848.30003428	0	2.5
4.40	20	824.70001928	0.012	848.30002153	0.015	2.5
3.70	20	824.70002438	0.006	848.30002526	0.011	2.5

NR Band 66 (Lowest Frequency: QPSK / Highest Frequency: QPSK)

Limit		1710	1780	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	1710.6995	1779.3005		
Extreme (50C)		1710.6995	1779.3006	52.8	0.030
Extreme (40C)		1710.6995	1779.3006	53.6	0.031
Extreme (30C)		1710.6995	1779.3006	60.7	0.035
Extreme (10C)		1710.6995	1779.3006	61.3	0.035
Extreme (0C)		1710.6995	1779.3006	54.8	0.031
Extreme (-10C)		1710.6995	1779.3006	50.6	0.029
Extreme (-20C)		1710.6995	1779.3006	51.3	0.029
Extreme (-30C)		1710.6995	1779.3006	55.2	0.032
20C	15%	1710.6995	1779.3006	39.5	0.023
	-15%	1710.6995	1779.3006	37.2	0.021
	End Point	1710.6995	1779.3006	35.8	0.021

9.5. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232, §27.50, §27.53 and §90.635

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

27.50:

(b)(10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

(c) (10) - Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

(d) (4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

(h) The following power limits shall apply in the BRS and EBS:

(2) Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

90.635(b) – The maximum output power of the transmitter for mobile stations is 100 watts (20dBw).

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

TEST PROCEDURE

ANSI / TIA / EIA 603 E Clause 2.2.17; ESU40 setting reference to 971168 D01 v03r01

For radiated output power measurement with a ESU40:

- a) Set the RBW $\geq$ OBW;
- b) Set VBW $\geq 3 \times$ RBW;
- c) Set span $\geq 2 \times$ RBW;
- d) Sweep time = auto couple;
- e) Detector = rms;
- f) Ensure that the number of measurement points $\geq$ span/RBW;
- g) Trace mode = max hold(GSM, WCDMA), average(LTE,NR);

TEST RESULTS

9.5.1. ERP/EIRP Results

GSM

Band	Mode	Channel	f [MHz]	ERP / EIRP	
				[dBm]	[mW]
GSM850	GPRS	128	824.2	31.90	1548.82
		190	836.6	33.56	2269.86
		251	848.8	32.60	1819.70
	EGPRS	128	824.2	26.95	495.45
		190	836.6	27.80	602.56
		251	848.8	27.42	552.08
GSM1900	GPRS	512	1850.2	29.09	810.96
		661	1880	29.25	841.40
		810	1909.8	29.81	957.19
	EGPRS	512	1850.2	26.46	442.59
		661	1880	26.68	465.59
		810	1909.8	27.02	503.50

WCDMA

Band	Mode	Channel	f [MHz]	ERP / EIRP	
				[dBm]	[mW]
Band 5	REL99	4132	826.4	23.59	228.56
		4183	836.6	24.47	279.90
		4233	846.6	23.76	237.68
	HSDPA	4132	826.4	22.55	179.89
		4183	836.6	23.54	225.94
		4233	846.6	22.88	194.09
Band 4	REL99	1312	1712.4	23.62	230.14
		1413	1732.6	23.55	226.46
		1513	1752.6	23.97	249.46
	HSDPA	1312	1712.4	23.21	209.41
		1413	1732.6	23.00	199.53
		1513	1752.6	22.92	195.88
Band 2	REL99	9262	1852.4	23.84	242.10
		9400	1880.0	23.85	242.66
		9538	1907.6	24.06	254.68
	HSDPA	9262	1852.4	22.67	184.93
		9400	1880.0	22.21	166.34
		9538	1907.6	23.02	200.45

LTE Band 2 (Sub Antenna)

Band	BW [MHz]	Mode	RB Size/ RB Offset	f [MHz]	ERP / EIRP	
					[dBm]	[mW]
Band 2	20	QPSK	1/49	1860.0	21.34	136.14
			1/49	1880.0	21.25	133.35
			1/49	1900.0	21.22	132.43
		16QAM	1/49	1860.0	21.21	132.13
			1/49	1880.0	21.10	128.82
			1/99	1900.0	21.10	128.82
	15	QPSK	1/74	1857.5	21.40	138.04
			1/37	1880.0	21.62	145.21
			1/37	1902.5	21.45	139.64
		16QAM	1/74	1857.5	21.62	145.21
			1/74	1880.0	21.39	137.72
			1/37	1902.5	21.34	136.14
	10	QPSK	1/25	1855.0	21.85	153.11
			1/0	1880.0	21.70	147.91
			1/49	1905.0	21.18	131.22
		16QAM	1/25	1855.0	21.64	145.88
			1/49	1880.0	21.80	151.36
			1/25	1905.0	21.02	126.47
	5	QPSK	1/12	1852.5	20.36	108.64
			1/24	1880.0	21.18	131.22
			1/12	1907.5	21.33	135.83
		16QAM	1/0	1852.5	22.21	166.34
			1/24	1880.0	22.39	173.38
			1/12	1907.5	21.55	142.89
	3	QPSK	1/0	1851.5	20.20	104.71
			1/8	1880.0	22.18	165.20
			1/0	1908.5	19.55	90.16
		16QAM	1/0	1851.5	19.95	98.86
			1/14	1880.0	20.99	125.60
			1/14	1908.5	20.23	105.44
	1.4	QPSK	1/5	1850.7	19.94	98.63
			1/5	1880.0	19.45	88.10
			1/5	1909.3	20.61	115.08
		16QAM	1/5	1850.7	19.82	95.94
			1/5	1880.0	19.56	90.36
			1/5	1909.3	20.56	113.76

LTE Band 12

Band	BW [MHz]	Mode	RB Size/ RB Offset	f [MHz]	ERP / EIRP	
					[dBm]	[mW]
Band 12	10	QPSK	1/0	704.0	21.34	136.14
			1/0	707.5	21.55	142.89
			1/0	711.0	21.78	150.66
		16QAM	1/0	704.0	20.07	101.62
			1/0	707.5	20.42	110.15
			1/0	711.0	20.69	117.22
	5	QPSK	1/12	701.5	21.34	136.14
			1/12	707.5	21.60	144.54
			1/12	713.5	22.08	161.44
		16QAM	1/0	701.5	19.91	97.95
			1/12	707.5	20.61	115.08
			1/0	713.5	20.93	123.88
	3	QPSK	1/8	700.5	20.75	118.85
			1/0	707.5	21.82	152.05
			1/8	714.5	21.78	150.66
		16QAM	1/8	700.5	19.55	90.16
			1/8	707.5	20.67	116.68
			1/0	714.5	20.54	113.24
	1.4	QPSK	1/5	699.7	20.96	124.74
			1/3	707.5	21.61	144.88
			1/3	715.3	21.74	149.28
		16QAM	1/0	699.7	19.77	94.84
			1/3	707.5	20.50	112.20
			1/3	715.3	20.27	106.41

LTE Band 13

Band	BW [MHz]	Mode	RB size / RB Offset	f [MHz]	ERP / EIRP	
					[dBm]	[mW]
Band 13	10	QPSK	1/25	782.0	22.71	186.64
		16QAM	1/25	782.0	21.65	146.22
	5	QPSK	1/12	779.5	22.53	179.06
			1/12	782.0	22.03	159.59
			1/12	784.5	22.00	158.49
		16QAM	1/12	779.5	21.27	133.97
			1/12	782.0	20.87	122.18
			1/0	784.5	21.39	137.72

LTE Band 25

Band	BW [MHz]	Mode	RB Size/ RB Offset	f [MHz]	ERP / EIRP	
					[dBm]	[mW]
Band 25	20	QPSK	1/49	1860.0	24.48	280.54
			1/49	1882.5	24.74	297.85
			1/49	1905.0	24.63	290.40
		16QAM	1/49	1860.0	23.67	232.81
			1/49	1882.5	23.83	241.55
			1/49	1905.0	23.63	230.67
	15	QPSK	1/37	1857.5	25.44	349.95
			1/37	1882.5	25.06	320.63
			1/37	1907.5	23.49	223.36
		16QAM	1/37	1857.5	24.35	272.27
			1/74	1882.5	23.92	246.60
			1/37	1907.5	22.41	174.18
	10	QPSK	1/25	1855.0	25.09	322.85
			1/25	1882.5	24.89	308.32
			1/25	1910.0	24.81	302.69
		16QAM	1/25	1855.0	23.91	246.04
			1/25	1882.5	24.34	271.64
			1/25	1910.0	23.84	242.10
	5	QPSK	1/12	1852.5	24.99	315.50
			1/12	1882.5	23.81	240.44
			1/12	1912.5	25.23	333.43
		16QAM	1/24	1852.5	24.13	258.82
			1/12	1882.5	22.69	185.78
			1/12	1912.5	23.67	232.81
	3	QPSK	1/8	1851.5	25.41	347.54
			1/8	1882.5	25.47	352.37
			1/8	1913.5	24.91	309.74
		16QAM	1/8	1851.5	24.04	253.51
			1/8	1882.5	24.42	276.69
			1/8	1913.5	23.95	248.31
	1.4	QPSK	1/3	1850.7	25.08	322.11
			1/5	1882.5	25.36	343.56
			1/3	1914.3	24.73	297.17
		16QAM	1/5	1850.7	24.33	271.02
			1/3	1882.5	24.15	260.02
			1/3	1914.3	23.77	238.23

LTE Band 26

Band	BW [MHz]	Mode	RB Size/ RB Offset	f [MHz]	ERP/EIRP	
					[dBm]	[mW]
Band 26	15	QPSK	1/37	821.5	24.97	314.05
			1/37	831.5	25.88	387.26
			1/37	841.5	25.05	319.89
		16QAM	1/37	821.5	23.66	232.27
			1/37	831.5	25.11	324.34
			1/37	841.5	23.97	249.46
	10	QPSK	1/25	819.0	25.35	342.77
			1/25	829.0	24.33	271.02
			1/25	831.5	25.06	320.63
			1/25	844.0	24.91	309.74
		16QAM	1/0	819.0	23.90	245.47
			1/25	829.0	23.19	208.45
			1/0	831.5	25.14	326.59
			1/25	844.0	23.88	244.34
	5	QPSK	1/12	816.5	25.02	317.69
			1/12	821.5	24.91	309.74
			1/12	826.5	25.10	323.59
			1/12	831.5	25.22	332.66
			1/12	846.5	23.97	249.46
		16QAM	1/12	816.5	23.99	250.61
			1/12	821.5	23.77	238.23
			1/12	826.5	23.82	240.99
	3	QPSK	1/12	831.5	23.70	234.42
			1/12	846.5	22.80	190.55
		16QAM	1/8	815.5	25.17	328.85
			1/8	822.5	24.88	307.61
			1/8	825.5	24.92	310.46
		16QAM	1/8	831.5	25.01	316.96
			1/8	847.5	23.71	234.96
			1/8	815.5	23.86	243.22
	1.4	QPSK	1/8	822.5	23.97	249.46
			1/8	825.5	23.65	231.74
			1/8	831.5	24.05	254.10
			1/8	847.5	22.53	179.06
		16QAM	1/3	814.7	25.08	322.11
			1/3	823.3	25.32	340.41
			1/3	824.7	24.66	292.42
			1/3	831.5	24.84	304.79
			1/3	848.3	23.35	216.27
		16QAM	1/3	814.7	24.05	254.10
			1/3	823.3	24.04	253.51
			1/0	824.7	23.56	226.99
			1/3	831.5	23.77	238.23
			1/5	848.3	21.97	157.40

LTE Band 26(Straddle)

Band	BW	Mode	RB Size/	f [MHz]	ERP/EIRP	
	[MHz]		RB Offset		[dBm]	[mW]
Band 26	15	QPSK	1/37	824	24.51	282.49
		16QAM	1/37		23.47	222.33
	10	QPSK	1/25	824	24.79	301.30
		16QAM	1/25		23.58	228.03
	5	QPSK	1/12	824	24.75	298.54
		16QAM	1/12		23.50	223.87
	3	QPSK	1/8	824	24.61	289.07
		16QAM	1/8		23.28	212.81
	1.4	QPSK	1/3	824	24.52	283.14
		16QAM	1/3		23.45	221.31

LTE Band 41 (PC2)

Band	BW [MHz]	Mode	RB Size/	f [MHz]	ERP / EIRP	
			RB Offset		[dBm]	[mW]
Band 41	20	QPSK	1/0	2506.0	26.03	400.87
			1/49	2593.0	25.68	369.83
			1/49	2680.0	25.13	325.84
		16QAM	1/49	2506.0	23.82	240.99
			1/49	2593.0	25.04	319.15
			1/49	2680.0	24.45	278.61
	15	QPSK	1/37	2503.5	24.18	261.82
			1/37	2593.0	26.02	399.94
			1/37	2682.5	25.63	365.59
		16QAM	1/0	2503.5	23.64	231.21
			1/37	2593.0	25.57	360.58
			1/37	2682.5	25.15	327.34
	10	QPSK	1/25	2501.0	24.63	290.40
			1/25	2593.0	25.95	393.55
			1/25	2685.0	25.36	343.56
		16QAM	1/25	2501.0	24.01	251.77
			1/25	2593.0	25.74	374.97
			1/25	2685.0	24.98	314.77
	5	QPSK	1/12	2498.5	26.33	429.54
			1/12	2593.0	27.44	554.63
			1/12	2687.5	27.08	510.50
		16QAM	1/12	2498.5	25.51	355.63
			1/12	2593.0	27.01	502.34
			1/12	2687.5	26.50	446.68

LTE Band 66

Band	BW [MHz]	Mode	RB Size/ RB Offset	f [MHz]	ERP / EIRP	
					[dBm]	[mW]
Band 66	20	QPSK	1/49	1720.0	24.28	267.92
			1/49	1745.0	24.28	267.92
			1/0	1770.0	24.81	302.69
		16QAM	1/49	1720.0	23.22	209.89
			1/49	1745.0	23.19	208.45
			1/0	1770.0	23.47	222.33
	15	QPSK	1/37	1717.5	24.08	255.86
			1/37	1747.5	24.52	283.14
			1/37	1772.5	24.42	276.69
		16QAM	1/37	1717.5	23.14	206.06
			1/37	1747.5	23.52	224.91
			1/0	1772.5	23.32	214.78
	10	QPSK	1/25	1715.0	24.04	253.51
			1/25	1745.0	24.90	309.03
			1/25	1775.0	23.96	248.89
		16QAM	1/25	1715.0	22.94	196.79
			1/25	1745.0	23.85	242.66
			1/25	1775.0	22.70	186.21
	5	QPSK	1/12	1712.5	24.22	264.24
			1/12	1745.0	24.13	258.82
			1/12	1777.5	23.83	241.55
		16QAM	1/12	1712.5	23.09	203.70
			1/12	1745.0	22.96	197.70
			1/12	1777.5	22.97	198.15
	3	QPSK	1/8	1711.5	24.14	259.42
			1/8	1745.0	24.63	290.40
			1/8	1778.5	23.86	243.22
		16QAM	1/8	1711.5	22.86	193.20
			1/8	1745.0	23.73	236.05
			1/0	1778.5	23.30	213.80
	1.4	QPSK	1/3	1710.7	24.16	260.62
			1/3	1745.0	24.82	303.39
			1/0	1779.3	23.92	246.60
		16QAM	1/3	1710.7	23.09	203.70
			1/0	1745.0	23.50	223.87
			1/5	1779.3	22.80	190.55

NR Band 5

Band	BW [MHz]	Modulation	Mode	RB Size/ RB Offset	f [MHz]	ERP / EIRP	
						[dBm]	[mW]
n5	20	DFT-s OFDM	QPSK	1/53	834.0	22.46	176.20
				1/53	836.5	22.00	158.49
				1/53	839.0	21.70	147.91
			16QAM	1/53	834.0	21.14	130.02
				1/53	836.5	20.42	110.15
				1/53	839.0	20.43	110.41
	15	DFT-s OFDM	QPSK	1/40	831.5	22.44	175.39
				1/40	836.5	21.92	155.60
				1/40	841.5	21.22	132.43
			16QAM	1/40	831.5	21.32	135.52
				1/40	836.5	20.72	118.03
				1/40	841.5	20.42	110.15
	10	DFT-s OFDM	QPSK	1/26	829.0	22.50	177.83
				1/26	836.5	21.61	144.88
				1/26	844.0	21.20	131.83
			16QAM	1/26	829.0	21.45	139.64
				1/26	836.5	20.78	119.67
				1/26	844.0	20.03	100.69
	5	DFT-s OFDM	QPSK	1/1	826.5	22.03	159.59
				1/23	836.5	21.86	153.46
				1/1	846.5	21.66	146.55
			16QAM	1/1	826.5	21.88	154.17
				1/23	836.5	20.47	111.43
				1/1	846.5	20.56	113.76

NR Band 66

Band	BW [MHz]	Modulation	Mode	RB Size/ RB Offset	f [MHz]	ERP / EIRP	
						[dBm]	[mW]
n66	20	DFT-s OFDM	QPSK	1/104	1720.0	20.88	122.46
				1/104	1745.0	20.70	117.49
				1/104	1770.0	19.29	84.92
			16QAM	1/104	1720.0	20.75	118.85
				1/104	1745.0	20.48	111.69
				1/104	1770.0	19.06	80.54
	15	DFT-s OFDM	QPSK	1/77	1717.5	20.51	112.46
				1/1	1745.0	20.18	104.23
				1/1	1772.5	20.17	103.99
			16QAM	1/77	1717.5	20.49	111.94
				1/1	1745.0	20.25	105.93
				1/1	1772.5	20.07	101.62
	10	DFT-s OFDM	QPSK	1/50	1715.0	19.80	95.50
				1/1	1745.0	20.52	112.72
				1/26	1775.0	19.91	97.95
			16QAM	1/50	1715.0	19.61	91.41
				1/1	1745.0	20.41	109.90
				1/26	1775.0	19.75	94.41
	5	DFT-s OFDM	QPSK	1/13	1712.5	20.52	112.72
				1/13	1745.0	20.84	121.34
				1/13	1777.5	20.50	112.20
			16QAM	1/13	1712.5	19.83	96.16
				1/13	1745.0	20.61	115.08
				1/13	1777.5	20.14	103.28

9.5.2. ERP/EIRP DATA

GSM850

GSM850 GPRS	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/9/2021 Test Engineer: 22943 Configuration: EUT, Y-Position Location: Chamber 2 Mode: GPRS 850 MHz Fundamentals Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>824.20</td><td>36.25</td><td>V</td><td>3.0</td><td>-1.3</td><td>31.90</td><td>38.5</td><td>-6.6</td></tr><tr><td>824.20</td><td>26.02</td><td>H</td><td>3.0</td><td>-1.3</td><td>21.67</td><td>38.5</td><td>-16.8</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>836.60</td><td>37.81</td><td>V</td><td>3.0</td><td>-1.2</td><td>33.56</td><td>38.5</td><td>-4.9</td></tr><tr><td>836.60</td><td>26.99</td><td>H</td><td>3.0</td><td>-1.2</td><td>22.74</td><td>38.5</td><td>-15.8</td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>848.80</td><td>36.76</td><td>V</td><td>3.1</td><td>-1.1</td><td>32.60</td><td>38.5</td><td>-5.9</td></tr><tr><td>848.80</td><td>28.13</td><td>H</td><td>3.1</td><td>-1.1</td><td>23.96</td><td>38.5</td><td>-14.5</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								824.20	36.25	V	3.0	-1.3	31.90	38.5	-6.6	824.20	26.02	H	3.0	-1.3	21.67	38.5	-16.8	Mid Ch								836.60	37.81	V	3.0	-1.2	33.56	38.5	-4.9	836.60	26.99	H	3.0	-1.2	22.74	38.5	-15.8	High Ch								848.80	36.76	V	3.1	-1.1	32.60	38.5	-5.9	848.80	28.13	H	3.1	-1.1	23.96	38.5	-14.5
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																	
	Low Ch																																																																																									
	824.20	36.25	V	3.0	-1.3	31.90	38.5	-6.6																																																																																		
	824.20	26.02	H	3.0	-1.3	21.67	38.5	-16.8																																																																																		
	Mid Ch																																																																																									
	836.60	37.81	V	3.0	-1.2	33.56	38.5	-4.9																																																																																		
	836.60	26.99	H	3.0	-1.2	22.74	38.5	-15.8																																																																																		
	High Ch																																																																																									
	848.80	36.76	V	3.1	-1.1	32.60	38.5	-5.9																																																																																		
848.80	28.13	H	3.1	-1.1	23.96	38.5	-14.5																																																																																			
GSM850 EGPRS	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/9/2021 Test Engineer: 22943 Configuration: EUT, Y-Position Location: Chamber 2 Mode: EGPRS 850 MHz Fundamentals Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>824.20</td><td>31.30</td><td>V</td><td>3.0</td><td>-1.3</td><td>26.95</td><td>38.5</td><td>-11.5</td></tr><tr><td>824.20</td><td>20.26</td><td>H</td><td>3.0</td><td>-1.3</td><td>15.91</td><td>38.5</td><td>-22.6</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>836.60</td><td>32.05</td><td>V</td><td>3.0</td><td>-1.2</td><td>27.80</td><td>38.5</td><td>-10.7</td></tr><tr><td>836.60</td><td>21.89</td><td>H</td><td>3.0</td><td>-1.2</td><td>17.64</td><td>38.5</td><td>-20.9</td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>848.80</td><td>31.58</td><td>V</td><td>3.1</td><td>-1.1</td><td>27.42</td><td>38.5</td><td>-11.1</td></tr><tr><td>848.80</td><td>22.26</td><td>H</td><td>3.1</td><td>-1.1</td><td>18.09</td><td>38.5</td><td>-20.4</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								824.20	31.30	V	3.0	-1.3	26.95	38.5	-11.5	824.20	20.26	H	3.0	-1.3	15.91	38.5	-22.6	Mid Ch								836.60	32.05	V	3.0	-1.2	27.80	38.5	-10.7	836.60	21.89	H	3.0	-1.2	17.64	38.5	-20.9	High Ch								848.80	31.58	V	3.1	-1.1	27.42	38.5	-11.1	848.80	22.26	H	3.1	-1.1	18.09	38.5	-20.4
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																	
	Low Ch																																																																																									
	824.20	31.30	V	3.0	-1.3	26.95	38.5	-11.5																																																																																		
	824.20	20.26	H	3.0	-1.3	15.91	38.5	-22.6																																																																																		
	Mid Ch																																																																																									
	836.60	32.05	V	3.0	-1.2	27.80	38.5	-10.7																																																																																		
	836.60	21.89	H	3.0	-1.2	17.64	38.5	-20.9																																																																																		
	High Ch																																																																																									
	848.80	31.58	V	3.1	-1.1	27.42	38.5	-11.1																																																																																		
848.80	22.26	H	3.1	-1.1	18.09	38.5	-20.4																																																																																			

GSM1900

GSM1900 GPRS	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/10/2021 Test Engineer: 22943 Configuration: EUT, Z-Position Location: Chamber 2 Mode: GPRS 1900 MHz Fundamentals Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>1850.20</td><td>21.60</td><td>V</td><td>4.5</td><td>9.6</td><td>26.78</td><td>33.0</td><td>-6.2</td><td></td></tr><tr><td>1850.20</td><td>23.91</td><td>H</td><td>4.5</td><td>9.6</td><td>29.09</td><td>33.0</td><td>-3.9</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>1880.00</td><td>22.39</td><td>V</td><td>4.5</td><td>9.4</td><td>27.26</td><td>33.0</td><td>-5.7</td><td></td></tr><tr><td>1880.00</td><td>24.38</td><td>H</td><td>4.5</td><td>9.4</td><td>29.25</td><td>33.0</td><td>-3.8</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>1909.80</td><td>22.73</td><td>V</td><td>4.5</td><td>9.1</td><td>27.25</td><td>33.0</td><td>-5.7</td><td></td></tr><tr><td>1909.80</td><td>25.28</td><td>H</td><td>4.5</td><td>9.1</td><td>29.81</td><td>33.0</td><td>-3.2</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1850.20	21.60	V	4.5	9.6	26.78	33.0	-6.2		1850.20	23.91	H	4.5	9.6	29.09	33.0	-3.9		Mid Ch									1880.00	22.39	V	4.5	9.4	27.26	33.0	-5.7		1880.00	24.38	H	4.5	9.4	29.25	33.0	-3.8		High Ch									1909.80	22.73	V	4.5	9.1	27.25	33.0	-5.7		1909.80	25.28	H	4.5	9.1	29.81	33.0	-3.2	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	1850.20	21.60	V	4.5	9.6	26.78	33.0	-6.2																																																																																											
	1850.20	23.91	H	4.5	9.6	29.09	33.0	-3.9																																																																																											
	Mid Ch																																																																																																		
	1880.00	22.39	V	4.5	9.4	27.26	33.0	-5.7																																																																																											
	1880.00	24.38	H	4.5	9.4	29.25	33.0	-3.8																																																																																											
	High Ch																																																																																																		
	1909.80	22.73	V	4.5	9.1	27.25	33.0	-5.7																																																																																											
1909.80	25.28	H	4.5	9.1	29.81	33.0	-3.2																																																																																												
GSM1900 EGPRS	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/10/2021 Test Engineer: 22943 Configuration: EUT, Z-Position Location: Chamber 2 Mode: EGPRS 1900 MHz Fundamentals Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>1850.20</td><td>18.63</td><td>V</td><td>4.5</td><td>9.6</td><td>23.81</td><td>33.0</td><td>-9.2</td><td></td></tr><tr><td>1850.20</td><td>21.28</td><td>H</td><td>4.5</td><td>9.6</td><td>26.46</td><td>33.0</td><td>-6.5</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>1880.00</td><td>18.90</td><td>V</td><td>4.5</td><td>9.4</td><td>23.77</td><td>33.0</td><td>-9.2</td><td></td></tr><tr><td>1880.00</td><td>21.81</td><td>H</td><td>4.5</td><td>9.4</td><td>26.68</td><td>33.0</td><td>-6.3</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>1909.80</td><td>18.53</td><td>V</td><td>4.5</td><td>9.1</td><td>23.05</td><td>33.0</td><td>-9.9</td><td></td></tr><tr><td>1909.80</td><td>22.49</td><td>H</td><td>4.5</td><td>9.1</td><td>27.02</td><td>33.0</td><td>-6.0</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1850.20	18.63	V	4.5	9.6	23.81	33.0	-9.2		1850.20	21.28	H	4.5	9.6	26.46	33.0	-6.5		Mid Ch									1880.00	18.90	V	4.5	9.4	23.77	33.0	-9.2		1880.00	21.81	H	4.5	9.4	26.68	33.0	-6.3		High Ch									1909.80	18.53	V	4.5	9.1	23.05	33.0	-9.9		1909.80	22.49	H	4.5	9.1	27.02	33.0	-6.0	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	1850.20	18.63	V	4.5	9.6	23.81	33.0	-9.2																																																																																											
	1850.20	21.28	H	4.5	9.6	26.46	33.0	-6.5																																																																																											
	Mid Ch																																																																																																		
	1880.00	18.90	V	4.5	9.4	23.77	33.0	-9.2																																																																																											
	1880.00	21.81	H	4.5	9.4	26.68	33.0	-6.3																																																																																											
	High Ch																																																																																																		
	1909.80	18.53	V	4.5	9.1	23.05	33.0	-9.9																																																																																											
1909.80	22.49	H	4.5	9.1	27.02	33.0	-6.0																																																																																												

WCDMA Band 5

Band 5 REL99	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/10/2021 Test Engineer: 22943 Configuration: EUT, Y-Position Location: Chamber 2 Mode: Rel99 Band 5 Fundamentals Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>826.40</td><td>27.92</td><td>V</td><td>3.0</td><td>-1.3</td><td>23.59</td><td>38.5</td><td>-14.9</td></tr><tr><td>826.40</td><td>17.38</td><td>H</td><td>3.0</td><td>-1.3</td><td>13.05</td><td>38.5</td><td>-25.4</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>836.60</td><td>28.72</td><td>V</td><td>3.0</td><td>-1.2</td><td>24.47</td><td>38.5</td><td>-14.0</td></tr><tr><td>836.60</td><td>18.45</td><td>H</td><td>3.0</td><td>-1.2</td><td>14.20</td><td>38.5</td><td>-24.3</td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>846.60</td><td>27.94</td><td>V</td><td>3.0</td><td>-1.1</td><td>23.76</td><td>38.5</td><td>-14.7</td></tr><tr><td>846.60</td><td>18.46</td><td>H</td><td>3.0</td><td>-1.1</td><td>14.28</td><td>38.5</td><td>-24.2</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								826.40	27.92	V	3.0	-1.3	23.59	38.5	-14.9	826.40	17.38	H	3.0	-1.3	13.05	38.5	-25.4	Mid Ch								836.60	28.72	V	3.0	-1.2	24.47	38.5	-14.0	836.60	18.45	H	3.0	-1.2	14.20	38.5	-24.3	High Ch								846.60	27.94	V	3.0	-1.1	23.76	38.5	-14.7	846.60	18.46	H	3.0	-1.1	14.28	38.5	-24.2	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																		
	Low Ch																																																																																										
	826.40	27.92	V	3.0	-1.3	23.59	38.5	-14.9																																																																																			
	826.40	17.38	H	3.0	-1.3	13.05	38.5	-25.4																																																																																			
	Mid Ch																																																																																										
	836.60	28.72	V	3.0	-1.2	24.47	38.5	-14.0																																																																																			
	836.60	18.45	H	3.0	-1.2	14.20	38.5	-24.3																																																																																			
	High Ch																																																																																										
	846.60	27.94	V	3.0	-1.1	23.76	38.5	-14.7																																																																																			
	846.60	18.46	H	3.0	-1.1	14.28	38.5	-24.2																																																																																			
	Band 5 HSDPA	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/10/2021 Test Engineer: 22943 Configuration: EUT, Y-Position Location: Chamber 2 Mode: HSDPA Band 5 Fundamentals Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>826.40</td><td>26.88</td><td>V</td><td>3.0</td><td>-1.3</td><td>22.55</td><td>38.5</td><td>-15.9</td></tr><tr><td>826.40</td><td>15.89</td><td>H</td><td>3.0</td><td>-1.3</td><td>11.56</td><td>38.5</td><td>-26.9</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>836.60</td><td>27.79</td><td>V</td><td>3.0</td><td>-1.2</td><td>23.54</td><td>38.5</td><td>-15.0</td></tr><tr><td>836.60</td><td>17.10</td><td>H</td><td>3.0</td><td>-1.2</td><td>12.85</td><td>38.5</td><td>-25.6</td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>846.60</td><td>27.06</td><td>V</td><td>3.0</td><td>-1.1</td><td>22.88</td><td>38.5</td><td>-15.6</td></tr><tr><td>846.60</td><td>17.33</td><td>H</td><td>3.0</td><td>-1.1</td><td>13.15</td><td>38.5</td><td>-25.3</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								826.40	26.88	V	3.0	-1.3	22.55	38.5	-15.9	826.40	15.89	H	3.0	-1.3	11.56	38.5	-26.9	Mid Ch								836.60	27.79	V	3.0	-1.2	23.54	38.5	-15.0	836.60	17.10	H	3.0	-1.2	12.85	38.5	-25.6	High Ch								846.60	27.06	V	3.0	-1.1	22.88	38.5	-15.6	846.60	17.33	H	3.0	-1.1	13.15	38.5	-25.3
		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																	
		Low Ch																																																																																									
		826.40	26.88	V	3.0	-1.3	22.55	38.5	-15.9																																																																																		
826.40		15.89	H	3.0	-1.3	11.56	38.5	-26.9																																																																																			
Mid Ch																																																																																											
836.60		27.79	V	3.0	-1.2	23.54	38.5	-15.0																																																																																			
836.60		17.10	H	3.0	-1.2	12.85	38.5	-25.6																																																																																			
High Ch																																																																																											
846.60		27.06	V	3.0	-1.1	22.88	38.5	-15.6																																																																																			
846.60		17.33	H	3.0	-1.1	13.15	38.5	-25.3																																																																																			

WCDMA Band 4

Band 4 REL99	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/10/2021 Test Engineer: 22943 Configuration: EUT, Z-Position Location: Chamber 2 Mode: Rel99 Band 4 Fundamentals Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1712.40</td><td>15.26</td><td>V</td><td>4.3</td><td>9.6</td><td>20.55</td><td>30.0</td><td>-9.5</td></tr><tr><td>1712.40</td><td>18.34</td><td>H</td><td>4.3</td><td>9.6</td><td>23.62</td><td>30.0</td><td>-6.4</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1732.60</td><td>14.42</td><td>V</td><td>4.3</td><td>9.6</td><td>19.75</td><td>30.0</td><td>-10.3</td></tr><tr><td>1732.60</td><td>18.23</td><td>H</td><td>4.3</td><td>9.6</td><td>23.55</td><td>30.0</td><td>-6.4</td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1752.60</td><td>15.18</td><td>V</td><td>4.3</td><td>9.7</td><td>20.54</td><td>30.0</td><td>-9.5</td></tr><tr><td>1752.60</td><td>18.62</td><td>H</td><td>4.3</td><td>9.7</td><td>23.97</td><td>30.0</td><td>-6.0</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								1712.40	15.26	V	4.3	9.6	20.55	30.0	-9.5	1712.40	18.34	H	4.3	9.6	23.62	30.0	-6.4	Mid Ch								1732.60	14.42	V	4.3	9.6	19.75	30.0	-10.3	1732.60	18.23	H	4.3	9.6	23.55	30.0	-6.4	High Ch								1752.60	15.18	V	4.3	9.7	20.54	30.0	-9.5	1752.60	18.62	H	4.3	9.7	23.97	30.0	-6.0
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																	
	Low Ch																																																																																									
	1712.40	15.26	V	4.3	9.6	20.55	30.0	-9.5																																																																																		
	1712.40	18.34	H	4.3	9.6	23.62	30.0	-6.4																																																																																		
	Mid Ch																																																																																									
	1732.60	14.42	V	4.3	9.6	19.75	30.0	-10.3																																																																																		
	1732.60	18.23	H	4.3	9.6	23.55	30.0	-6.4																																																																																		
	High Ch																																																																																									
	1752.60	15.18	V	4.3	9.7	20.54	30.0	-9.5																																																																																		
1752.60	18.62	H	4.3	9.7	23.97	30.0	-6.0																																																																																			
Band 4 HSDPA	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/10/2021 Test Engineer: 22943 Configuration: EUT, Z-Position Location: Chamber 2 Mode: HSDPA Band 4 Fundamentals Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1712.40</td><td>14.62</td><td>V</td><td>4.3</td><td>9.6</td><td>19.91</td><td>30.0</td><td>-10.1</td></tr><tr><td>1712.40</td><td>17.93</td><td>H</td><td>4.3</td><td>9.6</td><td>23.21</td><td>30.0</td><td>-6.8</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1732.60</td><td>13.35</td><td>V</td><td>4.3</td><td>9.6</td><td>18.68</td><td>30.0</td><td>-11.3</td></tr><tr><td>1732.60</td><td>17.68</td><td>H</td><td>4.3</td><td>9.6</td><td>23.00</td><td>30.0</td><td>-7.0</td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1752.60</td><td>14.05</td><td>V</td><td>4.3</td><td>9.7</td><td>19.41</td><td>30.0</td><td>-10.6</td></tr><tr><td>1752.60</td><td>17.57</td><td>H</td><td>4.3</td><td>9.7</td><td>22.92</td><td>30.0</td><td>-7.1</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								1712.40	14.62	V	4.3	9.6	19.91	30.0	-10.1	1712.40	17.93	H	4.3	9.6	23.21	30.0	-6.8	Mid Ch								1732.60	13.35	V	4.3	9.6	18.68	30.0	-11.3	1732.60	17.68	H	4.3	9.6	23.00	30.0	-7.0	High Ch								1752.60	14.05	V	4.3	9.7	19.41	30.0	-10.6	1752.60	17.57	H	4.3	9.7	22.92	30.0	-7.1
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																	
	Low Ch																																																																																									
	1712.40	14.62	V	4.3	9.6	19.91	30.0	-10.1																																																																																		
	1712.40	17.93	H	4.3	9.6	23.21	30.0	-6.8																																																																																		
	Mid Ch																																																																																									
	1732.60	13.35	V	4.3	9.6	18.68	30.0	-11.3																																																																																		
	1732.60	17.68	H	4.3	9.6	23.00	30.0	-7.0																																																																																		
	High Ch																																																																																									
	1752.60	14.05	V	4.3	9.7	19.41	30.0	-10.6																																																																																		
1752.60	17.57	H	4.3	9.7	22.92	30.0	-7.1																																																																																			

WCDMA Band 2

Band 2 REL99	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/10/2021 Test Engineer: 22943 Configuration: EUT, X-Position Location: Chamber 2 Mode: Rel99 Band 2 Fundamentals Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>1852.40</td><td>18.13</td><td>V</td><td>4.5</td><td>9.6</td><td>23.28</td><td>33.0</td><td>-9.7</td><td></td></tr><tr><td>1852.40</td><td>18.68</td><td>H</td><td>4.5</td><td>9.6</td><td>23.84</td><td>33.0</td><td>-9.2</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>1880.00</td><td>18.18</td><td>V</td><td>4.5</td><td>9.4</td><td>23.05</td><td>33.0</td><td>-9.9</td><td></td></tr><tr><td>1880.00</td><td>18.98</td><td>H</td><td>4.5</td><td>9.4</td><td>23.85</td><td>33.0</td><td>-9.2</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>1907.60</td><td>19.50</td><td>V</td><td>4.5</td><td>9.1</td><td>24.06</td><td>33.0</td><td>-8.9</td><td></td></tr><tr><td>1907.60</td><td>18.81</td><td>H</td><td>4.5</td><td>9.1</td><td>23.37</td><td>33.0</td><td>-9.6</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1852.40	18.13	V	4.5	9.6	23.28	33.0	-9.7		1852.40	18.68	H	4.5	9.6	23.84	33.0	-9.2		Mid Ch									1880.00	18.18	V	4.5	9.4	23.05	33.0	-9.9		1880.00	18.98	H	4.5	9.4	23.85	33.0	-9.2		High Ch									1907.60	19.50	V	4.5	9.1	24.06	33.0	-8.9		1907.60	18.81	H	4.5	9.1	23.37	33.0	-9.6	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	1852.40	18.13	V	4.5	9.6	23.28	33.0	-9.7																																																																																											
	1852.40	18.68	H	4.5	9.6	23.84	33.0	-9.2																																																																																											
	Mid Ch																																																																																																		
	1880.00	18.18	V	4.5	9.4	23.05	33.0	-9.9																																																																																											
	1880.00	18.98	H	4.5	9.4	23.85	33.0	-9.2																																																																																											
	High Ch																																																																																																		
	1907.60	19.50	V	4.5	9.1	24.06	33.0	-8.9																																																																																											
1907.60	18.81	H	4.5	9.1	23.37	33.0	-9.6																																																																																												
Band 2 HSDPA	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/10/2021 Test Engineer: 22943 Configuration: EUT, X-Position Location: Chamber 2 Mode: HSDPA Band 2 Fundamentals Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>1852.40</td><td>17.12</td><td>V</td><td>4.5</td><td>9.6</td><td>22.27</td><td>33.0</td><td>-10.7</td><td></td></tr><tr><td>1852.40</td><td>17.51</td><td>H</td><td>4.5</td><td>9.6</td><td>22.67</td><td>33.0</td><td>-10.3</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>1880.00</td><td>17.08</td><td>V</td><td>4.5</td><td>9.4</td><td>21.95</td><td>33.0</td><td>-11.0</td><td></td></tr><tr><td>1880.00</td><td>17.34</td><td>H</td><td>4.5</td><td>9.4</td><td>22.21</td><td>33.0</td><td>-10.8</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>1907.60</td><td>18.46</td><td>V</td><td>4.5</td><td>9.1</td><td>23.02</td><td>33.0</td><td>-10.0</td><td></td></tr><tr><td>1907.60</td><td>17.55</td><td>H</td><td>4.5</td><td>9.1</td><td>22.11</td><td>33.0</td><td>-10.9</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1852.40	17.12	V	4.5	9.6	22.27	33.0	-10.7		1852.40	17.51	H	4.5	9.6	22.67	33.0	-10.3		Mid Ch									1880.00	17.08	V	4.5	9.4	21.95	33.0	-11.0		1880.00	17.34	H	4.5	9.4	22.21	33.0	-10.8		High Ch									1907.60	18.46	V	4.5	9.1	23.02	33.0	-10.0		1907.60	17.55	H	4.5	9.1	22.11	33.0	-10.9	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	1852.40	17.12	V	4.5	9.6	22.27	33.0	-10.7																																																																																											
	1852.40	17.51	H	4.5	9.6	22.67	33.0	-10.3																																																																																											
	Mid Ch																																																																																																		
	1880.00	17.08	V	4.5	9.4	21.95	33.0	-11.0																																																																																											
	1880.00	17.34	H	4.5	9.4	22.21	33.0	-10.8																																																																																											
	High Ch																																																																																																		
	1907.60	18.46	V	4.5	9.1	23.02	33.0	-10.0																																																																																											
1907.60	17.55	H	4.5	9.1	22.11	33.0	-10.9																																																																																												

LTE Band 2(Sub Antenna)

LTE Band 2 20MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 12/9/2021 Test Engineer: 19568 Configuration: EUT / AC Adpater, X-Position Location: Chamber 1 Mode: LTE_QPSK Band 2 Fundamentals, 20MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1860.00</td><td>8.66</td><td>V</td><td>4.5</td><td>9.5</td><td>13.70</td><td>33.0</td><td>-19.3</td></tr><tr><td>1860.00</td><td>16.29</td><td>H</td><td>4.5</td><td>9.5</td><td>21.34</td><td>33.0</td><td>-11.7</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1880.00</td><td>9.33</td><td>V</td><td>4.5</td><td>9.4</td><td>14.21</td><td>33.0</td><td>-18.8</td></tr><tr><td>1880.00</td><td>16.37</td><td>H</td><td>4.5</td><td>9.4</td><td>21.25</td><td>33.0</td><td>-11.8</td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1900.00</td><td>9.84</td><td>V</td><td>4.5</td><td>9.2</td><td>14.55</td><td>33.0</td><td>-18.4</td></tr><tr><td>1900.00</td><td>16.51</td><td>H</td><td>4.5</td><td>9.2</td><td>21.22</td><td>33.0</td><td>-11.8</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								1860.00	8.66	V	4.5	9.5	13.70	33.0	-19.3	1860.00	16.29	H	4.5	9.5	21.34	33.0	-11.7	Mid Ch								1880.00	9.33	V	4.5	9.4	14.21	33.0	-18.8	1880.00	16.37	H	4.5	9.4	21.25	33.0	-11.8	High Ch								1900.00	9.84	V	4.5	9.2	14.55	33.0	-18.4	1900.00	16.51	H	4.5	9.2	21.22	33.0	-11.8
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																	
	Low Ch																																																																																									
	1860.00	8.66	V	4.5	9.5	13.70	33.0	-19.3																																																																																		
	1860.00	16.29	H	4.5	9.5	21.34	33.0	-11.7																																																																																		
	Mid Ch																																																																																									
	1880.00	9.33	V	4.5	9.4	14.21	33.0	-18.8																																																																																		
	1880.00	16.37	H	4.5	9.4	21.25	33.0	-11.8																																																																																		
	High Ch																																																																																									
	1900.00	9.84	V	4.5	9.2	14.55	33.0	-18.4																																																																																		
1900.00	16.51	H	4.5	9.2	21.22	33.0	-11.8																																																																																			
LTE Band 2 20MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 12/9/2021 Test Engineer: 19568 Configuration: EUT / AC Adapter, X-Position Location: Chamber 1 Mode: LTE_16QAM Band 2 Fundamentals, 20MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1860.00</td><td>8.51</td><td>V</td><td>4.5</td><td>9.5</td><td>13.55</td><td>33.0</td><td>-19.4</td></tr><tr><td>1860.00</td><td>16.16</td><td>H</td><td>4.5</td><td>9.5</td><td>21.21</td><td>33.0</td><td>-11.8</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1880.00</td><td>9.21</td><td>V</td><td>4.5</td><td>9.4</td><td>14.09</td><td>33.0</td><td>-18.9</td></tr><tr><td>1880.00</td><td>16.22</td><td>H</td><td>4.5</td><td>9.4</td><td>21.10</td><td>33.0</td><td>-11.9</td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1900.00</td><td>9.77</td><td>V</td><td>4.5</td><td>9.2</td><td>14.48</td><td>33.0</td><td>-18.5</td></tr><tr><td>1900.00</td><td>16.39</td><td>H</td><td>4.5</td><td>9.2</td><td>21.10</td><td>33.0</td><td>-11.9</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								1860.00	8.51	V	4.5	9.5	13.55	33.0	-19.4	1860.00	16.16	H	4.5	9.5	21.21	33.0	-11.8	Mid Ch								1880.00	9.21	V	4.5	9.4	14.09	33.0	-18.9	1880.00	16.22	H	4.5	9.4	21.10	33.0	-11.9	High Ch								1900.00	9.77	V	4.5	9.2	14.48	33.0	-18.5	1900.00	16.39	H	4.5	9.2	21.10	33.0	-11.9
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																	
	Low Ch																																																																																									
	1860.00	8.51	V	4.5	9.5	13.55	33.0	-19.4																																																																																		
	1860.00	16.16	H	4.5	9.5	21.21	33.0	-11.8																																																																																		
	Mid Ch																																																																																									
	1880.00	9.21	V	4.5	9.4	14.09	33.0	-18.9																																																																																		
	1880.00	16.22	H	4.5	9.4	21.10	33.0	-11.9																																																																																		
	High Ch																																																																																									
	1900.00	9.77	V	4.5	9.2	14.48	33.0	-18.5																																																																																		
1900.00	16.39	H	4.5	9.2	21.10	33.0	-11.9																																																																																			

LTE Band 2 15MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 12/9/2021 Test Engineer: 19568 Configuration: EUT / AC Adapter, X-Position Location: Chamber 1 Mode: LTE_QPSK Band 2 Fundamentals, 15MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>1857.50</td><td>9.48</td><td>V</td><td>4.5</td><td>9.5</td><td>14.55</td><td>33.0</td><td>-18.4</td><td></td></tr><tr><td>1857.50</td><td>16.33</td><td>H</td><td>4.5</td><td>9.5</td><td>21.40</td><td>33.0</td><td>-11.6</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>1880.00</td><td>10.70</td><td>V</td><td>4.5</td><td>9.4</td><td>15.58</td><td>33.0</td><td>-17.4</td><td></td></tr><tr><td>1880.00</td><td>16.74</td><td>H</td><td>4.5</td><td>9.4</td><td>21.62</td><td>33.0</td><td>-11.4</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>1902.50</td><td>11.13</td><td>V</td><td>4.5</td><td>9.2</td><td>15.81</td><td>33.0</td><td>-17.2</td><td></td></tr><tr><td>1902.50</td><td>16.77</td><td>H</td><td>4.5</td><td>9.2</td><td>21.45</td><td>33.0</td><td>-11.6</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1857.50	9.48	V	4.5	9.5	14.55	33.0	-18.4		1857.50	16.33	H	4.5	9.5	21.40	33.0	-11.6		Mid Ch									1880.00	10.70	V	4.5	9.4	15.58	33.0	-17.4		1880.00	16.74	H	4.5	9.4	21.62	33.0	-11.4		High Ch									1902.50	11.13	V	4.5	9.2	15.81	33.0	-17.2		1902.50	16.77	H	4.5	9.2	21.45	33.0	-11.6	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	1857.50	9.48	V	4.5	9.5	14.55	33.0	-18.4																																																																																											
	1857.50	16.33	H	4.5	9.5	21.40	33.0	-11.6																																																																																											
	Mid Ch																																																																																																		
	1880.00	10.70	V	4.5	9.4	15.58	33.0	-17.4																																																																																											
	1880.00	16.74	H	4.5	9.4	21.62	33.0	-11.4																																																																																											
	High Ch																																																																																																		
	1902.50	11.13	V	4.5	9.2	15.81	33.0	-17.2																																																																																											
1902.50	16.77	H	4.5	9.2	21.45	33.0	-11.6																																																																																												
LTE Band 2 15MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 12/9/2021 Test Engineer: 19568 Configuration: EUT / AC Adapter, X-Position Location: Chamber 1 Mode: LTE_16QAM Band 2 Fundamentals, 15MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>1857.50</td><td>9.58</td><td>V</td><td>4.5</td><td>9.5</td><td>14.65</td><td>33.0</td><td>-18.3</td><td></td></tr><tr><td>1857.50</td><td>16.55</td><td>H</td><td>4.5</td><td>9.5</td><td>21.62</td><td>33.0</td><td>-11.4</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>1880.00</td><td>10.76</td><td>V</td><td>4.5</td><td>9.4</td><td>15.64</td><td>33.0</td><td>-17.4</td><td></td></tr><tr><td>1880.00</td><td>16.51</td><td>H</td><td>4.5</td><td>9.4</td><td>21.39</td><td>33.0</td><td>-11.6</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>1902.50</td><td>11.06</td><td>V</td><td>4.5</td><td>9.2</td><td>15.74</td><td>33.0</td><td>-17.3</td><td></td></tr><tr><td>1902.50</td><td>16.66</td><td>H</td><td>4.5</td><td>9.2</td><td>21.34</td><td>33.0</td><td>-11.7</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1857.50	9.58	V	4.5	9.5	14.65	33.0	-18.3		1857.50	16.55	H	4.5	9.5	21.62	33.0	-11.4		Mid Ch									1880.00	10.76	V	4.5	9.4	15.64	33.0	-17.4		1880.00	16.51	H	4.5	9.4	21.39	33.0	-11.6		High Ch									1902.50	11.06	V	4.5	9.2	15.74	33.0	-17.3		1902.50	16.66	H	4.5	9.2	21.34	33.0	-11.7	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	1857.50	9.58	V	4.5	9.5	14.65	33.0	-18.3																																																																																											
	1857.50	16.55	H	4.5	9.5	21.62	33.0	-11.4																																																																																											
	Mid Ch																																																																																																		
	1880.00	10.76	V	4.5	9.4	15.64	33.0	-17.4																																																																																											
	1880.00	16.51	H	4.5	9.4	21.39	33.0	-11.6																																																																																											
	High Ch																																																																																																		
	1902.50	11.06	V	4.5	9.2	15.74	33.0	-17.3																																																																																											
1902.50	16.66	H	4.5	9.2	21.34	33.0	-11.7																																																																																												

LTE
Band 2

10MHz

QPSK

UL Verification Services, Inc.
High Frequency Substitution Measurement

Company: Samsung
Project #: 4790101660
Date: 12/9/2021
Test Engineer: 19568
Configuration: EUT/ AC Adapter, X-Position
Location: Chamber 1
Mode: LTE_QPSK Band 2 Fundamentals, 10MHz Bandwidth

Test Equipment:

Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables
Substitution: Horn 3115[00167211], 8.5m SMA-type Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch								
1855.00	9.33	V	4.5	9.6	14.42	33.0	-18.6	
1855.00	16.76	H	4.5	9.6	21.85	33.0	-11.1	
Mid Ch								
1880.00	10.10	V	4.5	9.4	14.98	33.0	-18.0	
1880.00	16.82	H	4.5	9.4	21.70	33.0	-11.3	
High Ch								
1905.00	9.70	V	4.5	9.2	14.35	33.0	-18.7	
1905.00	16.53	H	4.5	9.2	21.18	33.0	-11.8	

LTE
Band 2

10MHz

16QAM

UL Verification Services, Inc.
High Frequency Substitution Measurement

Company: Samsung
Project #: 4790101660
Date: 12/9/2021
Test Engineer: 19568
Configuration: EUT/ AC Adapter, X-Position
Location: Chamber 1
Mode: LTE_16QAM Band 2 Fundamentals, 10MHz Bandwidth

Test Equipment:

Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables
Substitution: Horn 3115[00167211], 8.5m SMA-type Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch								
1855.00	9.68	V	4.5	9.6	14.77	33.0	-18.2	
1855.00	16.55	H	4.5	9.6	21.64	33.0	-11.4	
Mid Ch								
1880.00	10.03	V	4.5	9.4	14.91	33.0	-18.1	
1880.00	16.92	H	4.5	9.4	21.80	33.0	-11.2	
High Ch								
1905.00	9.43	V	4.5	9.2	14.08	33.0	-18.9	
1905.00	16.37	H	4.5	9.2	21.02	33.0	-12.0	

LTE Band 2 5MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 12/9/2021 Test Engineer: 19568 Configuration: EUT / AC Adapter, X-Position Location: Chamber 1 Mode: LTE_QPSK Band 2 Fundamentals, 5MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1852.50</td><td>9.43</td><td>V</td><td>4.5</td><td>9.6</td><td>14.54</td><td>33.0</td><td>-18.5</td></tr><tr><td>1852.50</td><td>15.25</td><td>H</td><td>4.5</td><td>9.6</td><td>20.36</td><td>33.0</td><td>-12.6</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1880.00</td><td>9.96</td><td>V</td><td>4.5</td><td>9.4</td><td>14.84</td><td>33.0</td><td>-18.2</td></tr><tr><td>1880.00</td><td>16.30</td><td>H</td><td>4.5</td><td>9.4</td><td>21.18</td><td>33.0</td><td>-11.8</td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1907.50</td><td>10.18</td><td>V</td><td>4.5</td><td>9.2</td><td>14.80</td><td>33.0</td><td>-18.2</td></tr><tr><td>1907.50</td><td>16.72</td><td>H</td><td>4.5</td><td>9.2</td><td>21.33</td><td>33.0</td><td>-11.7</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								1852.50	9.43	V	4.5	9.6	14.54	33.0	-18.5	1852.50	15.25	H	4.5	9.6	20.36	33.0	-12.6	Mid Ch								1880.00	9.96	V	4.5	9.4	14.84	33.0	-18.2	1880.00	16.30	H	4.5	9.4	21.18	33.0	-11.8	High Ch								1907.50	10.18	V	4.5	9.2	14.80	33.0	-18.2	1907.50	16.72	H	4.5	9.2	21.33	33.0	-11.7
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																	
	Low Ch																																																																																									
	1852.50	9.43	V	4.5	9.6	14.54	33.0	-18.5																																																																																		
	1852.50	15.25	H	4.5	9.6	20.36	33.0	-12.6																																																																																		
	Mid Ch																																																																																									
	1880.00	9.96	V	4.5	9.4	14.84	33.0	-18.2																																																																																		
	1880.00	16.30	H	4.5	9.4	21.18	33.0	-11.8																																																																																		
	High Ch																																																																																									
	1907.50	10.18	V	4.5	9.2	14.80	33.0	-18.2																																																																																		
1907.50	16.72	H	4.5	9.2	21.33	33.0	-11.7																																																																																			
LTE Band 2 5MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 12/9/2021 Test Engineer: 19568 Configuration: EUT / AC Adapter, X-Position Location: Chamber 1 Mode: LTE_16QAM Band 2 Fundamentals, 5MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1852.50</td><td>9.71</td><td>V</td><td>4.5</td><td>9.6</td><td>14.82</td><td>33.0</td><td>-18.2</td></tr><tr><td>1852.50</td><td>17.10</td><td>H</td><td>4.5</td><td>9.6</td><td>22.21</td><td>33.0</td><td>-10.8</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1880.00</td><td>10.38</td><td>V</td><td>4.5</td><td>9.4</td><td>15.26</td><td>33.0</td><td>-17.7</td></tr><tr><td>1880.00</td><td>17.51</td><td>H</td><td>4.5</td><td>9.4</td><td>22.39</td><td>33.0</td><td>-10.6</td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1907.50</td><td>10.16</td><td>V</td><td>4.5</td><td>9.2</td><td>14.78</td><td>33.0</td><td>-18.2</td></tr><tr><td>1907.50</td><td>16.94</td><td>H</td><td>4.5</td><td>9.2</td><td>21.55</td><td>33.0</td><td>-11.4</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								1852.50	9.71	V	4.5	9.6	14.82	33.0	-18.2	1852.50	17.10	H	4.5	9.6	22.21	33.0	-10.8	Mid Ch								1880.00	10.38	V	4.5	9.4	15.26	33.0	-17.7	1880.00	17.51	H	4.5	9.4	22.39	33.0	-10.6	High Ch								1907.50	10.16	V	4.5	9.2	14.78	33.0	-18.2	1907.50	16.94	H	4.5	9.2	21.55	33.0	-11.4
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																	
	Low Ch																																																																																									
	1852.50	9.71	V	4.5	9.6	14.82	33.0	-18.2																																																																																		
	1852.50	17.10	H	4.5	9.6	22.21	33.0	-10.8																																																																																		
	Mid Ch																																																																																									
	1880.00	10.38	V	4.5	9.4	15.26	33.0	-17.7																																																																																		
	1880.00	17.51	H	4.5	9.4	22.39	33.0	-10.6																																																																																		
	High Ch																																																																																									
	1907.50	10.16	V	4.5	9.2	14.78	33.0	-18.2																																																																																		
1907.50	16.94	H	4.5	9.2	21.55	33.0	-11.4																																																																																			

LTE Band 2 3MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 12/8/2021 Test Engineer: 19568 Configuration: EUT / AC Adapter, X-Position Location: Chamber 1 Mode: LTE_QPSK Band 2 Fundamentals, 3MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>1851.50</td><td>11.32</td><td>V</td><td>4.5</td><td>9.6</td><td>16.44</td><td>33.0</td><td>-16.6</td><td></td></tr><tr><td>1851.50</td><td>15.07</td><td>H</td><td>4.5</td><td>9.6</td><td>20.20</td><td>33.0</td><td>-12.8</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>1880.00</td><td>12.23</td><td>V</td><td>4.5</td><td>9.4</td><td>17.11</td><td>33.0</td><td>-15.9</td><td></td></tr><tr><td>1880.00</td><td>17.30</td><td>H</td><td>4.5</td><td>9.4</td><td>22.18</td><td>33.0</td><td>-10.8</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>1908.50</td><td>11.38</td><td>V</td><td>4.5</td><td>9.1</td><td>15.98</td><td>33.0</td><td>-17.0</td><td></td></tr><tr><td>1908.50</td><td>14.95</td><td>H</td><td>4.5</td><td>9.1</td><td>19.55</td><td>33.0</td><td>-13.5</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1851.50	11.32	V	4.5	9.6	16.44	33.0	-16.6		1851.50	15.07	H	4.5	9.6	20.20	33.0	-12.8		Mid Ch									1880.00	12.23	V	4.5	9.4	17.11	33.0	-15.9		1880.00	17.30	H	4.5	9.4	22.18	33.0	-10.8		High Ch									1908.50	11.38	V	4.5	9.1	15.98	33.0	-17.0		1908.50	14.95	H	4.5	9.1	19.55	33.0	-13.5	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	1851.50	11.32	V	4.5	9.6	16.44	33.0	-16.6																																																																																											
	1851.50	15.07	H	4.5	9.6	20.20	33.0	-12.8																																																																																											
	Mid Ch																																																																																																		
	1880.00	12.23	V	4.5	9.4	17.11	33.0	-15.9																																																																																											
	1880.00	17.30	H	4.5	9.4	22.18	33.0	-10.8																																																																																											
	High Ch																																																																																																		
	1908.50	11.38	V	4.5	9.1	15.98	33.0	-17.0																																																																																											
1908.50	14.95	H	4.5	9.1	19.55	33.0	-13.5																																																																																												
LTE Band 2 3MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 12/8/2021 Test Engineer: 19568 Configuration: EUT / AC Adapter, X-Position Location: Chamber 1 Mode: LTE_16QAM Band 2 Fundamentals, 3MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>1851.50</td><td>11.25</td><td>V</td><td>4.5</td><td>9.6</td><td>16.37</td><td>33.0</td><td>-16.6</td><td></td></tr><tr><td>1851.50</td><td>14.82</td><td>H</td><td>4.5</td><td>9.6</td><td>19.95</td><td>33.0</td><td>-13.1</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>1880.00</td><td>8.27</td><td>V</td><td>4.5</td><td>9.4</td><td>13.15</td><td>33.0</td><td>-19.9</td><td></td></tr><tr><td>1880.00</td><td>16.11</td><td>H</td><td>4.5</td><td>9.4</td><td>20.99</td><td>33.0</td><td>-12.0</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>1908.50</td><td>12.47</td><td>V</td><td>4.5</td><td>9.1</td><td>17.07</td><td>33.0</td><td>-15.9</td><td></td></tr><tr><td>1908.50</td><td>15.63</td><td>H</td><td>4.5</td><td>9.1</td><td>20.23</td><td>33.0</td><td>-12.8</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1851.50	11.25	V	4.5	9.6	16.37	33.0	-16.6		1851.50	14.82	H	4.5	9.6	19.95	33.0	-13.1		Mid Ch									1880.00	8.27	V	4.5	9.4	13.15	33.0	-19.9		1880.00	16.11	H	4.5	9.4	20.99	33.0	-12.0		High Ch									1908.50	12.47	V	4.5	9.1	17.07	33.0	-15.9		1908.50	15.63	H	4.5	9.1	20.23	33.0	-12.8	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	1851.50	11.25	V	4.5	9.6	16.37	33.0	-16.6																																																																																											
	1851.50	14.82	H	4.5	9.6	19.95	33.0	-13.1																																																																																											
	Mid Ch																																																																																																		
	1880.00	8.27	V	4.5	9.4	13.15	33.0	-19.9																																																																																											
	1880.00	16.11	H	4.5	9.4	20.99	33.0	-12.0																																																																																											
	High Ch																																																																																																		
	1908.50	12.47	V	4.5	9.1	17.07	33.0	-15.9																																																																																											
1908.50	15.63	H	4.5	9.1	20.23	33.0	-12.8																																																																																												

LTE
Band 2

1.4MHz

QPSK

UL Verification Services, Inc.
High Frequency Substitution Measurement

Company: Samsung
Project #: 4790101660
Date: 12/8/2021
Test Engineer: 19568
Configuration: EUT / AC Adapter, X-Position
Location: Chamber 1
Mode: LTE_QPSK Band 2 Fundamentals, 1.4MHz Bandwidth

Test Equipment:

Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables
Substitution: Horn 3115[00167211], 8.5m SMA-type Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch								
1850.70	11.52	V	4.5	9.6	16.65	33.0	-16.4	
1850.70	14.81	H	4.5	9.6	19.94	33.0	-13.1	
Mid Ch								
1880.00	10.94	V	4.5	9.4	15.82	33.0	-17.2	
1880.00	14.57	H	4.5	9.4	19.45	33.0	-13.6	
High Ch								
1909.30	10.56	V	4.5	9.1	15.15	33.0	-17.8	
1909.30	16.02	H	4.5	9.1	20.61	33.0	-12.4	

LTE
Band 2

1.4MHz

16QAM

UL Verification Services, Inc.
High Frequency Substitution Measurement

Company: Samsung
Project #: 4790101660
Date: 12/8/2021
Test Engineer: 19568
Configuration: EUT / AC Adapter, X-Position
Location: Chamber 1
Mode: LTE_16QAM Band 2 Fundamentals, 1.4MHz Bandwidth

Test Equipment:

Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables
Substitution: Horn 3115[00167211], 8.5m SMA-type Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch								
1850.70	11.47	V	4.5	9.6	16.60	33.0	-16.4	
1850.70	14.69	H	4.5	9.6	19.82	33.0	-13.2	
Mid Ch								
1880.00	10.76	V	4.5	9.4	15.64	33.0	-17.4	
1880.00	14.68	H	4.5	9.4	19.56	33.0	-13.4	
High Ch								
1909.30	10.44	V	4.5	9.1	15.03	33.0	-18.0	
1909.30	15.97	H	4.5	9.1	20.56	33.0	-12.4	

LTE Band 12

LTE Band 12 10MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/5/2021 Test Engineer: 22943 Configuration: EUT, X-Position Location: Chamber 2 Mode: LTE_QPSK Band 12 Fundamentals, 10MHz Bandwidth Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>704.00</td><td>16.21</td><td>V</td><td>2.8</td><td>-1.4</td><td>12.06</td><td>34.8</td><td>-22.7</td><td></td></tr><tr><td>704.00</td><td>25.49</td><td>H</td><td>2.8</td><td>-1.4</td><td>21.34</td><td>34.8</td><td>-13.4</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>707.50</td><td>16.12</td><td>V</td><td>2.8</td><td>-1.4</td><td>11.95</td><td>34.8</td><td>-22.8</td><td></td></tr><tr><td>707.50</td><td>25.71</td><td>H</td><td>2.8</td><td>-1.4</td><td>21.55</td><td>34.8</td><td>-13.2</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>711.00</td><td>16.84</td><td>V</td><td>2.8</td><td>-1.4</td><td>12.67</td><td>34.8</td><td>-22.1</td><td></td></tr><tr><td>711.00</td><td>25.95</td><td>H</td><td>2.8</td><td>-1.4</td><td>21.78</td><td>34.8</td><td>-13.0</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									704.00	16.21	V	2.8	-1.4	12.06	34.8	-22.7		704.00	25.49	H	2.8	-1.4	21.34	34.8	-13.4		Mid Ch									707.50	16.12	V	2.8	-1.4	11.95	34.8	-22.8		707.50	25.71	H	2.8	-1.4	21.55	34.8	-13.2		High Ch									711.00	16.84	V	2.8	-1.4	12.67	34.8	-22.1		711.00	25.95	H	2.8	-1.4	21.78	34.8	-13.0	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	704.00	16.21	V	2.8	-1.4	12.06	34.8	-22.7																																																																																											
	704.00	25.49	H	2.8	-1.4	21.34	34.8	-13.4																																																																																											
	Mid Ch																																																																																																		
	707.50	16.12	V	2.8	-1.4	11.95	34.8	-22.8																																																																																											
	707.50	25.71	H	2.8	-1.4	21.55	34.8	-13.2																																																																																											
	High Ch																																																																																																		
	711.00	16.84	V	2.8	-1.4	12.67	34.8	-22.1																																																																																											
711.00	25.95	H	2.8	-1.4	21.78	34.8	-13.0																																																																																												
LTE Band 12 10MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/5/2021 Test Engineer: 22943 Configuration: EUT, X-Position Location: Chamber 2 Mode: LTE_16QAM Band 12 Fundamentals, 10MHz Bandwidth Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>704.00</td><td>15.04</td><td>V</td><td>2.8</td><td>-1.4</td><td>10.89</td><td>34.8</td><td>-23.9</td><td></td></tr><tr><td>704.00</td><td>24.22</td><td>H</td><td>2.8</td><td>-1.4</td><td>20.07</td><td>34.8</td><td>-14.7</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>707.50</td><td>14.74</td><td>V</td><td>2.8</td><td>-1.4</td><td>10.57</td><td>34.8</td><td>-24.2</td><td></td></tr><tr><td>707.50</td><td>24.58</td><td>H</td><td>2.8</td><td>-1.4</td><td>20.42</td><td>34.8</td><td>-14.4</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>711.00</td><td>15.54</td><td>V</td><td>2.8</td><td>-1.4</td><td>11.37</td><td>34.8</td><td>-23.4</td><td></td></tr><tr><td>711.00</td><td>24.86</td><td>H</td><td>2.8</td><td>-1.4</td><td>20.69</td><td>34.8</td><td>-14.1</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									704.00	15.04	V	2.8	-1.4	10.89	34.8	-23.9		704.00	24.22	H	2.8	-1.4	20.07	34.8	-14.7		Mid Ch									707.50	14.74	V	2.8	-1.4	10.57	34.8	-24.2		707.50	24.58	H	2.8	-1.4	20.42	34.8	-14.4		High Ch									711.00	15.54	V	2.8	-1.4	11.37	34.8	-23.4		711.00	24.86	H	2.8	-1.4	20.69	34.8	-14.1	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	704.00	15.04	V	2.8	-1.4	10.89	34.8	-23.9																																																																																											
	704.00	24.22	H	2.8	-1.4	20.07	34.8	-14.7																																																																																											
	Mid Ch																																																																																																		
	707.50	14.74	V	2.8	-1.4	10.57	34.8	-24.2																																																																																											
	707.50	24.58	H	2.8	-1.4	20.42	34.8	-14.4																																																																																											
	High Ch																																																																																																		
	711.00	15.54	V	2.8	-1.4	11.37	34.8	-23.4																																																																																											
711.00	24.86	H	2.8	-1.4	20.69	34.8	-14.1																																																																																												

LTE Band 12 5MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/5/2021 Test Engineer: 22943 Configuration: EUT, X-Position Location: Chamber 2 Mode: LTE_QPSK Band 12 Fundamentals, 5MHz Bandwidth Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>701.50</td><td>16.32</td><td>V</td><td>2.8</td><td>-1.4</td><td>12.19</td><td>34.8</td><td>-22.6</td></tr><tr><td>701.50</td><td>25.47</td><td>H</td><td>2.8</td><td>-1.4</td><td>21.34</td><td>34.8</td><td>-13.4</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>707.50</td><td>17.06</td><td>V</td><td>2.8</td><td>-1.4</td><td>12.89</td><td>34.8</td><td>-21.9</td></tr><tr><td>707.50</td><td>25.76</td><td>H</td><td>2.8</td><td>-1.4</td><td>21.60</td><td>34.8</td><td>-13.2</td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>713.50</td><td>17.47</td><td>V</td><td>2.8</td><td>-1.4</td><td>13.29</td><td>34.8</td><td>-21.5</td></tr><tr><td>713.50</td><td>26.26</td><td>H</td><td>2.8</td><td>-1.4</td><td>22.08</td><td>34.8</td><td>-12.7</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								701.50	16.32	V	2.8	-1.4	12.19	34.8	-22.6	701.50	25.47	H	2.8	-1.4	21.34	34.8	-13.4	Mid Ch								707.50	17.06	V	2.8	-1.4	12.89	34.8	-21.9	707.50	25.76	H	2.8	-1.4	21.60	34.8	-13.2	High Ch								713.50	17.47	V	2.8	-1.4	13.29	34.8	-21.5	713.50	26.26	H	2.8	-1.4	22.08	34.8	-12.7
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																	
	Low Ch																																																																																									
	701.50	16.32	V	2.8	-1.4	12.19	34.8	-22.6																																																																																		
	701.50	25.47	H	2.8	-1.4	21.34	34.8	-13.4																																																																																		
	Mid Ch																																																																																									
	707.50	17.06	V	2.8	-1.4	12.89	34.8	-21.9																																																																																		
	707.50	25.76	H	2.8	-1.4	21.60	34.8	-13.2																																																																																		
	High Ch																																																																																									
	713.50	17.47	V	2.8	-1.4	13.29	34.8	-21.5																																																																																		
713.50	26.26	H	2.8	-1.4	22.08	34.8	-12.7																																																																																			
LTE Band 12 5MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/5/2021 Test Engineer: 22943 Configuration: EUT, X-Position Location: Chamber 2 Mode: LTE_16QAM Band 12 Fundamentals, 5MHz Bandwidth Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>701.50</td><td>15.16</td><td>V</td><td>2.8</td><td>-1.4</td><td>11.03</td><td>34.8</td><td>-23.7</td></tr><tr><td>701.50</td><td>24.04</td><td>H</td><td>2.8</td><td>-1.4</td><td>19.91</td><td>34.8</td><td>-14.9</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>707.50</td><td>15.82</td><td>V</td><td>2.8</td><td>-1.4</td><td>11.65</td><td>34.8</td><td>-23.1</td></tr><tr><td>707.50</td><td>24.77</td><td>H</td><td>2.8</td><td>-1.4</td><td>20.61</td><td>34.8</td><td>-14.2</td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>713.50</td><td>16.40</td><td>V</td><td>2.8</td><td>-1.4</td><td>12.22</td><td>34.8</td><td>-22.5</td></tr><tr><td>713.50</td><td>25.11</td><td>H</td><td>2.8</td><td>-1.4</td><td>20.93</td><td>34.8</td><td>-13.8</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								701.50	15.16	V	2.8	-1.4	11.03	34.8	-23.7	701.50	24.04	H	2.8	-1.4	19.91	34.8	-14.9	Mid Ch								707.50	15.82	V	2.8	-1.4	11.65	34.8	-23.1	707.50	24.77	H	2.8	-1.4	20.61	34.8	-14.2	High Ch								713.50	16.40	V	2.8	-1.4	12.22	34.8	-22.5	713.50	25.11	H	2.8	-1.4	20.93	34.8	-13.8
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																	
	Low Ch																																																																																									
	701.50	15.16	V	2.8	-1.4	11.03	34.8	-23.7																																																																																		
	701.50	24.04	H	2.8	-1.4	19.91	34.8	-14.9																																																																																		
	Mid Ch																																																																																									
	707.50	15.82	V	2.8	-1.4	11.65	34.8	-23.1																																																																																		
	707.50	24.77	H	2.8	-1.4	20.61	34.8	-14.2																																																																																		
	High Ch																																																																																									
	713.50	16.40	V	2.8	-1.4	12.22	34.8	-22.5																																																																																		
713.50	25.11	H	2.8	-1.4	20.93	34.8	-13.8																																																																																			

LTE Band 12 3MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/5/2021 Test Engineer: 22943 Configuration: EUT, X-Position Location: Chamber 2 Mode: LTE_QPSK Band 12 Fundamentals, 3MHz Bandwidth Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>700.50</td><td>16.21</td><td>V</td><td>2.8</td><td>-1.4</td><td>12.08</td><td>34.8</td><td>-22.7</td><td></td></tr><tr><td>700.50</td><td>24.89</td><td>H</td><td>2.8</td><td>-1.4</td><td>20.75</td><td>34.8</td><td>-14.0</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>707.50</td><td>16.68</td><td>V</td><td>2.8</td><td>-1.4</td><td>12.51</td><td>34.8</td><td>-22.3</td><td></td></tr><tr><td>707.50</td><td>25.98</td><td>H</td><td>2.8</td><td>-1.4</td><td>21.82</td><td>34.8</td><td>-13.0</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>714.50</td><td>17.65</td><td>V</td><td>2.8</td><td>-1.4</td><td>13.46</td><td>34.8</td><td>-21.3</td><td></td></tr><tr><td>714.50</td><td>25.97</td><td>H</td><td>2.8</td><td>-1.4</td><td>21.78</td><td>34.8</td><td>-13.0</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									700.50	16.21	V	2.8	-1.4	12.08	34.8	-22.7		700.50	24.89	H	2.8	-1.4	20.75	34.8	-14.0		Mid Ch									707.50	16.68	V	2.8	-1.4	12.51	34.8	-22.3		707.50	25.98	H	2.8	-1.4	21.82	34.8	-13.0		High Ch									714.50	17.65	V	2.8	-1.4	13.46	34.8	-21.3		714.50	25.97	H	2.8	-1.4	21.78	34.8	-13.0	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	700.50	16.21	V	2.8	-1.4	12.08	34.8	-22.7																																																																																											
	700.50	24.89	H	2.8	-1.4	20.75	34.8	-14.0																																																																																											
	Mid Ch																																																																																																		
	707.50	16.68	V	2.8	-1.4	12.51	34.8	-22.3																																																																																											
	707.50	25.98	H	2.8	-1.4	21.82	34.8	-13.0																																																																																											
	High Ch																																																																																																		
	714.50	17.65	V	2.8	-1.4	13.46	34.8	-21.3																																																																																											
714.50	25.97	H	2.8	-1.4	21.78	34.8	-13.0																																																																																												
LTE Band 12 3MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/5/2021 Test Engineer: 22943 Configuration: EUT, X-Position Location: Chamber 2 Mode: LTE_16QAM Band 12 Fundamentals, 3MHz Bandwidth Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>700.50</td><td>15.07</td><td>V</td><td>2.8</td><td>-1.4</td><td>10.94</td><td>34.8</td><td>-23.8</td><td></td></tr><tr><td>700.50</td><td>23.69</td><td>H</td><td>2.8</td><td>-1.4</td><td>19.55</td><td>34.8</td><td>-15.2</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>707.50</td><td>15.86</td><td>V</td><td>2.8</td><td>-1.4</td><td>11.69</td><td>34.8</td><td>-23.1</td><td></td></tr><tr><td>707.50</td><td>24.83</td><td>H</td><td>2.8</td><td>-1.4</td><td>20.67</td><td>34.8</td><td>-14.1</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>714.50</td><td>16.19</td><td>V</td><td>2.8</td><td>-1.4</td><td>12.00</td><td>34.8</td><td>-22.8</td><td></td></tr><tr><td>714.50</td><td>24.73</td><td>H</td><td>2.8</td><td>-1.4</td><td>20.54</td><td>34.8</td><td>-14.2</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									700.50	15.07	V	2.8	-1.4	10.94	34.8	-23.8		700.50	23.69	H	2.8	-1.4	19.55	34.8	-15.2		Mid Ch									707.50	15.86	V	2.8	-1.4	11.69	34.8	-23.1		707.50	24.83	H	2.8	-1.4	20.67	34.8	-14.1		High Ch									714.50	16.19	V	2.8	-1.4	12.00	34.8	-22.8		714.50	24.73	H	2.8	-1.4	20.54	34.8	-14.2	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	700.50	15.07	V	2.8	-1.4	10.94	34.8	-23.8																																																																																											
	700.50	23.69	H	2.8	-1.4	19.55	34.8	-15.2																																																																																											
	Mid Ch																																																																																																		
	707.50	15.86	V	2.8	-1.4	11.69	34.8	-23.1																																																																																											
	707.50	24.83	H	2.8	-1.4	20.67	34.8	-14.1																																																																																											
	High Ch																																																																																																		
	714.50	16.19	V	2.8	-1.4	12.00	34.8	-22.8																																																																																											
714.50	24.73	H	2.8	-1.4	20.54	34.8	-14.2																																																																																												

LTE Band 12 1.4MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/5/2021 Test Engineer: 22943 Configuration: EUT, X-Position Location: Chamber 2 Mode: LTE_QPSK Band 12 Fundamentals, 1.4MHz Bandwidth Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>699.70</td><td>16.28</td><td>V</td><td>2.8</td><td>-1.4</td><td>12.15</td><td>34.8</td><td>-22.6</td><td></td></tr><tr><td>699.70</td><td>25.09</td><td>H</td><td>2.8</td><td>-1.4</td><td>20.96</td><td>34.8</td><td>-13.8</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>707.50</td><td>16.92</td><td>V</td><td>2.8</td><td>-1.4</td><td>12.75</td><td>34.8</td><td>-22.0</td><td></td></tr><tr><td>707.50</td><td>25.77</td><td>H</td><td>2.8</td><td>-1.4</td><td>21.61</td><td>34.8</td><td>-13.2</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>715.30</td><td>17.21</td><td>V</td><td>2.8</td><td>-1.4</td><td>13.02</td><td>34.8</td><td>-21.7</td><td></td></tr><tr><td>715.30</td><td>25.93</td><td>H</td><td>2.8</td><td>-1.4</td><td>21.74</td><td>34.8</td><td>-13.0</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									699.70	16.28	V	2.8	-1.4	12.15	34.8	-22.6		699.70	25.09	H	2.8	-1.4	20.96	34.8	-13.8		Mid Ch									707.50	16.92	V	2.8	-1.4	12.75	34.8	-22.0		707.50	25.77	H	2.8	-1.4	21.61	34.8	-13.2		High Ch									715.30	17.21	V	2.8	-1.4	13.02	34.8	-21.7		715.30	25.93	H	2.8	-1.4	21.74	34.8	-13.0	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	699.70	16.28	V	2.8	-1.4	12.15	34.8	-22.6																																																																																											
	699.70	25.09	H	2.8	-1.4	20.96	34.8	-13.8																																																																																											
	Mid Ch																																																																																																		
	707.50	16.92	V	2.8	-1.4	12.75	34.8	-22.0																																																																																											
	707.50	25.77	H	2.8	-1.4	21.61	34.8	-13.2																																																																																											
	High Ch																																																																																																		
	715.30	17.21	V	2.8	-1.4	13.02	34.8	-21.7																																																																																											
715.30	25.93	H	2.8	-1.4	21.74	34.8	-13.0																																																																																												
LTE Band 12 1.4MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/5/2021 Test Engineer: 22943 Configuration: EUT, X-Position Location: Chamber 2 Mode: LTE_16QAM Band 12 Fundamentals, 1.4MHz Bandwidth Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>699.70</td><td>15.01</td><td>V</td><td>2.8</td><td>-1.4</td><td>10.88</td><td>34.8</td><td>-23.9</td><td></td></tr><tr><td>699.70</td><td>23.90</td><td>H</td><td>2.8</td><td>-1.4</td><td>19.77</td><td>34.8</td><td>-15.0</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>707.50</td><td>15.55</td><td>V</td><td>2.8</td><td>-1.4</td><td>11.38</td><td>34.8</td><td>-23.4</td><td></td></tr><tr><td>707.50</td><td>24.66</td><td>H</td><td>2.8</td><td>-1.4</td><td>20.50</td><td>34.8</td><td>-14.3</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>715.30</td><td>16.17</td><td>V</td><td>2.8</td><td>-1.4</td><td>11.98</td><td>34.8</td><td>-22.8</td><td></td></tr><tr><td>715.30</td><td>24.46</td><td>H</td><td>2.8</td><td>-1.4</td><td>20.27</td><td>34.8</td><td>-14.5</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									699.70	15.01	V	2.8	-1.4	10.88	34.8	-23.9		699.70	23.90	H	2.8	-1.4	19.77	34.8	-15.0		Mid Ch									707.50	15.55	V	2.8	-1.4	11.38	34.8	-23.4		707.50	24.66	H	2.8	-1.4	20.50	34.8	-14.3		High Ch									715.30	16.17	V	2.8	-1.4	11.98	34.8	-22.8		715.30	24.46	H	2.8	-1.4	20.27	34.8	-14.5	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	699.70	15.01	V	2.8	-1.4	10.88	34.8	-23.9																																																																																											
	699.70	23.90	H	2.8	-1.4	19.77	34.8	-15.0																																																																																											
	Mid Ch																																																																																																		
	707.50	15.55	V	2.8	-1.4	11.38	34.8	-23.4																																																																																											
	707.50	24.66	H	2.8	-1.4	20.50	34.8	-14.3																																																																																											
	High Ch																																																																																																		
	715.30	16.17	V	2.8	-1.4	11.98	34.8	-22.8																																																																																											
715.30	24.46	H	2.8	-1.4	20.27	34.8	-14.5																																																																																												

LTE Band 13

LTE
Band 13

10MHz

QPSK

UL Verification Services, Inc.

High Frequency Substitution Measurement

Company: Samsung

Project #: 4790101660

Date: 11/5/2021

Test Engineer: 22943

Configuration: EUT, Y-Position

Location: Chamber 2

Mode: LTE_QPSK Band 13 Fundamentals, 10MHz Bandwidth

Test Equipment:

Receiving: VULB9163-749, and Chamber 2 SMA Cables

Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Mid Ch								
782.00	27.16	V	2.9	-1.5	22.71	34.8	-12.1	
782.00	18.00	H	2.9	-1.5	13.55	34.8	-21.2	

LTE
Band 13

10MHz

16QAM

UL Verification Services, Inc.

High Frequency Substitution Measurement

Company: Samsung

Project #: 4790101660

Date: 11/5/2021

Test Engineer: 22943

Configuration: EUT, Y-Position

Location: Chamber 2

Mode: LTE_16QAM Band 13 Fundamentals, 10MHz Bandwidth

Test Equipment:

Receiving: VULB9163-749, and Chamber 2 SMA Cables

Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Mid Ch								
782.00	26.10	V	2.9	-1.5	21.65	34.8	-13.1	
782.00	16.88	H	2.9	-1.5	12.43	34.8	-22.3	

LTE Band 13 5MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/8/2021 Test Engineer: 22943 Configuration: EUT, Y-Position Location: Chamber 2 Mode: LTE_QPSK Band 13 Fundamentals, 5MHz Bandwidth Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>779.50</td><td>26.97</td><td>V</td><td>2.9</td><td>-1.5</td><td>22.53</td><td>34.8</td><td>-12.2</td></tr><tr><td>779.50</td><td>18.19</td><td>H</td><td>2.9</td><td>-1.5</td><td>13.75</td><td>34.8</td><td>-21.0</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>782.00</td><td>26.48</td><td>V</td><td>2.9</td><td>-1.5</td><td>22.03</td><td>34.8</td><td>-12.7</td></tr><tr><td>782.00</td><td>17.52</td><td>H</td><td>2.9</td><td>-1.5</td><td>13.07</td><td>34.8</td><td>-21.7</td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>784.50</td><td>26.46</td><td>V</td><td>2.9</td><td>-1.5</td><td>22.00</td><td>34.8</td><td>-12.8</td></tr><tr><td>784.50</td><td>16.92</td><td>H</td><td>2.9</td><td>-1.5</td><td>12.46</td><td>34.8</td><td>-22.3</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								779.50	26.97	V	2.9	-1.5	22.53	34.8	-12.2	779.50	18.19	H	2.9	-1.5	13.75	34.8	-21.0	Mid Ch								782.00	26.48	V	2.9	-1.5	22.03	34.8	-12.7	782.00	17.52	H	2.9	-1.5	13.07	34.8	-21.7	High Ch								784.50	26.46	V	2.9	-1.5	22.00	34.8	-12.8	784.50	16.92	H	2.9	-1.5	12.46	34.8	-22.3
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																	
	Low Ch																																																																																									
	779.50	26.97	V	2.9	-1.5	22.53	34.8	-12.2																																																																																		
	779.50	18.19	H	2.9	-1.5	13.75	34.8	-21.0																																																																																		
	Mid Ch																																																																																									
	782.00	26.48	V	2.9	-1.5	22.03	34.8	-12.7																																																																																		
	782.00	17.52	H	2.9	-1.5	13.07	34.8	-21.7																																																																																		
	High Ch																																																																																									
	784.50	26.46	V	2.9	-1.5	22.00	34.8	-12.8																																																																																		
784.50	16.92	H	2.9	-1.5	12.46	34.8	-22.3																																																																																			
LTE Band 13 5MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/8/2021 Test Engineer: 22943 Configuration: EUT, Y-Position Location: Chamber 2 Mode: LTE_16QAM Band 13 Fundamentals, 5MHz Bandwidth Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>779.50</td><td>25.71</td><td>V</td><td>2.9</td><td>-1.5</td><td>21.27</td><td>34.8</td><td>-13.5</td></tr><tr><td>779.50</td><td>17.10</td><td>H</td><td>2.9</td><td>-1.5</td><td>12.66</td><td>34.8</td><td>-22.1</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>782.00</td><td>25.32</td><td>V</td><td>2.9</td><td>-1.5</td><td>20.87</td><td>34.8</td><td>-13.9</td></tr><tr><td>782.00</td><td>16.21</td><td>H</td><td>2.9</td><td>-1.5</td><td>11.76</td><td>34.8</td><td>-23.0</td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>784.50</td><td>25.85</td><td>V</td><td>2.9</td><td>-1.5</td><td>21.39</td><td>34.8</td><td>-13.4</td></tr><tr><td>784.50</td><td>16.07</td><td>H</td><td>2.9</td><td>-1.5</td><td>11.61</td><td>34.8</td><td>-23.2</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								779.50	25.71	V	2.9	-1.5	21.27	34.8	-13.5	779.50	17.10	H	2.9	-1.5	12.66	34.8	-22.1	Mid Ch								782.00	25.32	V	2.9	-1.5	20.87	34.8	-13.9	782.00	16.21	H	2.9	-1.5	11.76	34.8	-23.0	High Ch								784.50	25.85	V	2.9	-1.5	21.39	34.8	-13.4	784.50	16.07	H	2.9	-1.5	11.61	34.8	-23.2
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																	
	Low Ch																																																																																									
	779.50	25.71	V	2.9	-1.5	21.27	34.8	-13.5																																																																																		
	779.50	17.10	H	2.9	-1.5	12.66	34.8	-22.1																																																																																		
	Mid Ch																																																																																									
	782.00	25.32	V	2.9	-1.5	20.87	34.8	-13.9																																																																																		
	782.00	16.21	H	2.9	-1.5	11.76	34.8	-23.0																																																																																		
	High Ch																																																																																									
	784.50	25.85	V	2.9	-1.5	21.39	34.8	-13.4																																																																																		
784.50	16.07	H	2.9	-1.5	11.61	34.8	-23.2																																																																																			

LTE Band 25

LTE Band 25 20MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/8/2021 Test Engineer: 19568 Configuration: EUT, Z-Position Location: Chamber 2 Mode: LTE_QPSK Band 25 Fundamentals, 20MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1860.00</td><td>15.62</td><td>V</td><td>4.5</td><td>9.6</td><td>20.70</td><td>33.0</td><td>-12.3</td></tr><tr><td>1860.00</td><td>19.41</td><td>H</td><td>4.5</td><td>9.6</td><td>24.48</td><td>33.0</td><td>-8.5</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1882.50</td><td>16.10</td><td>V</td><td>4.5</td><td>9.3</td><td>20.94</td><td>33.0</td><td>-12.1</td></tr><tr><td>1882.50</td><td>19.89</td><td>H</td><td>4.5</td><td>9.3</td><td>24.74</td><td>33.0</td><td>-8.3</td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1905.00</td><td>16.27</td><td>V</td><td>4.5</td><td>9.1</td><td>20.87</td><td>33.0</td><td>-12.1</td></tr><tr><td>1905.00</td><td>20.04</td><td>H</td><td>4.5</td><td>9.1</td><td>24.63</td><td>33.0</td><td>-8.4</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								1860.00	15.62	V	4.5	9.6	20.70	33.0	-12.3	1860.00	19.41	H	4.5	9.6	24.48	33.0	-8.5	Mid Ch								1882.50	16.10	V	4.5	9.3	20.94	33.0	-12.1	1882.50	19.89	H	4.5	9.3	24.74	33.0	-8.3	High Ch								1905.00	16.27	V	4.5	9.1	20.87	33.0	-12.1	1905.00	20.04	H	4.5	9.1	24.63	33.0	-8.4
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																	
	Low Ch																																																																																									
	1860.00	15.62	V	4.5	9.6	20.70	33.0	-12.3																																																																																		
	1860.00	19.41	H	4.5	9.6	24.48	33.0	-8.5																																																																																		
	Mid Ch																																																																																									
	1882.50	16.10	V	4.5	9.3	20.94	33.0	-12.1																																																																																		
	1882.50	19.89	H	4.5	9.3	24.74	33.0	-8.3																																																																																		
	High Ch																																																																																									
	1905.00	16.27	V	4.5	9.1	20.87	33.0	-12.1																																																																																		
1905.00	20.04	H	4.5	9.1	24.63	33.0	-8.4																																																																																			
LTE Band 25 20MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/8/2021 Test Engineer: 19568 Configuration: EUT, Z-Position Location: Chamber 2 Mode: LTE_16QAM Band 25 Fundamentals, 20MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1860.00</td><td>14.89</td><td>V</td><td>4.5</td><td>9.6</td><td>19.97</td><td>33.0</td><td>-13.0</td></tr><tr><td>1860.00</td><td>18.60</td><td>H</td><td>4.5</td><td>9.6</td><td>23.67</td><td>33.0</td><td>-9.3</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1882.50</td><td>14.86</td><td>V</td><td>4.5</td><td>9.3</td><td>19.70</td><td>33.0</td><td>-13.3</td></tr><tr><td>1882.50</td><td>18.98</td><td>H</td><td>4.5</td><td>9.3</td><td>23.83</td><td>33.0</td><td>-9.2</td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1905.00</td><td>15.28</td><td>V</td><td>4.5</td><td>9.1</td><td>19.88</td><td>33.0</td><td>-13.1</td></tr><tr><td>1905.00</td><td>19.04</td><td>H</td><td>4.5</td><td>9.1</td><td>23.63</td><td>33.0</td><td>-9.4</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								1860.00	14.89	V	4.5	9.6	19.97	33.0	-13.0	1860.00	18.60	H	4.5	9.6	23.67	33.0	-9.3	Mid Ch								1882.50	14.86	V	4.5	9.3	19.70	33.0	-13.3	1882.50	18.98	H	4.5	9.3	23.83	33.0	-9.2	High Ch								1905.00	15.28	V	4.5	9.1	19.88	33.0	-13.1	1905.00	19.04	H	4.5	9.1	23.63	33.0	-9.4
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																	
	Low Ch																																																																																									
	1860.00	14.89	V	4.5	9.6	19.97	33.0	-13.0																																																																																		
	1860.00	18.60	H	4.5	9.6	23.67	33.0	-9.3																																																																																		
	Mid Ch																																																																																									
	1882.50	14.86	V	4.5	9.3	19.70	33.0	-13.3																																																																																		
	1882.50	18.98	H	4.5	9.3	23.83	33.0	-9.2																																																																																		
	High Ch																																																																																									
	1905.00	15.28	V	4.5	9.1	19.88	33.0	-13.1																																																																																		
1905.00	19.04	H	4.5	9.1	23.63	33.0	-9.4																																																																																			

LTE Band 25 15MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/5/2021 Test Engineer: 20882 Configuration: EUT, Z-Position Location: Chamber 1 Mode: LTE_QPSK Band 25 Fundamentals, 15MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>1857.50</td><td>15.90</td><td>V</td><td>4.5</td><td>9.5</td><td>20.97</td><td>33.0</td><td>-12.0</td><td></td></tr><tr><td>1857.50</td><td>20.37</td><td>H</td><td>4.5</td><td>9.5</td><td>25.44</td><td>33.0</td><td>-7.6</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>1882.50</td><td>16.77</td><td>V</td><td>4.5</td><td>9.4</td><td>21.63</td><td>33.0</td><td>-11.4</td><td></td></tr><tr><td>1882.50</td><td>20.20</td><td>H</td><td>4.5</td><td>9.4</td><td>25.06</td><td>33.0</td><td>-7.9</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>1907.50</td><td>15.84</td><td>V</td><td>4.5</td><td>9.2</td><td>20.46</td><td>33.0</td><td>-12.5</td><td></td></tr><tr><td>1907.50</td><td>18.88</td><td>H</td><td>4.5</td><td>9.2</td><td>23.49</td><td>33.0</td><td>-9.5</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1857.50	15.90	V	4.5	9.5	20.97	33.0	-12.0		1857.50	20.37	H	4.5	9.5	25.44	33.0	-7.6		Mid Ch									1882.50	16.77	V	4.5	9.4	21.63	33.0	-11.4		1882.50	20.20	H	4.5	9.4	25.06	33.0	-7.9		High Ch									1907.50	15.84	V	4.5	9.2	20.46	33.0	-12.5		1907.50	18.88	H	4.5	9.2	23.49	33.0	-9.5	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	1857.50	15.90	V	4.5	9.5	20.97	33.0	-12.0																																																																																											
	1857.50	20.37	H	4.5	9.5	25.44	33.0	-7.6																																																																																											
	Mid Ch																																																																																																		
	1882.50	16.77	V	4.5	9.4	21.63	33.0	-11.4																																																																																											
	1882.50	20.20	H	4.5	9.4	25.06	33.0	-7.9																																																																																											
	High Ch																																																																																																		
	1907.50	15.84	V	4.5	9.2	20.46	33.0	-12.5																																																																																											
1907.50	18.88	H	4.5	9.2	23.49	33.0	-9.5																																																																																												
LTE Band 25 15MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/5/2021 Test Engineer: 20882 Configuration: EUT, Z-Position Location: Chamber 1 Mode: LTE_16QAM Band 25 Fundamentals, 15MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>1857.50</td><td>14.80</td><td>V</td><td>4.5</td><td>9.5</td><td>19.87</td><td>33.0</td><td>-13.1</td><td></td></tr><tr><td>1857.50</td><td>19.28</td><td>H</td><td>4.5</td><td>9.5</td><td>24.35</td><td>33.0</td><td>-8.6</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>1882.50</td><td>15.37</td><td>V</td><td>4.5</td><td>9.4</td><td>20.23</td><td>33.0</td><td>-12.8</td><td></td></tr><tr><td>1882.50</td><td>19.06</td><td>H</td><td>4.5</td><td>9.4</td><td>23.92</td><td>33.0</td><td>-9.1</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>1907.50</td><td>14.52</td><td>V</td><td>4.5</td><td>9.2</td><td>19.14</td><td>33.0</td><td>-13.9</td><td></td></tr><tr><td>1907.50</td><td>17.80</td><td>H</td><td>4.5</td><td>9.2</td><td>22.41</td><td>33.0</td><td>-10.6</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1857.50	14.80	V	4.5	9.5	19.87	33.0	-13.1		1857.50	19.28	H	4.5	9.5	24.35	33.0	-8.6		Mid Ch									1882.50	15.37	V	4.5	9.4	20.23	33.0	-12.8		1882.50	19.06	H	4.5	9.4	23.92	33.0	-9.1		High Ch									1907.50	14.52	V	4.5	9.2	19.14	33.0	-13.9		1907.50	17.80	H	4.5	9.2	22.41	33.0	-10.6	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	1857.50	14.80	V	4.5	9.5	19.87	33.0	-13.1																																																																																											
	1857.50	19.28	H	4.5	9.5	24.35	33.0	-8.6																																																																																											
	Mid Ch																																																																																																		
	1882.50	15.37	V	4.5	9.4	20.23	33.0	-12.8																																																																																											
	1882.50	19.06	H	4.5	9.4	23.92	33.0	-9.1																																																																																											
	High Ch																																																																																																		
	1907.50	14.52	V	4.5	9.2	19.14	33.0	-13.9																																																																																											
1907.50	17.80	H	4.5	9.2	22.41	33.0	-10.6																																																																																												

LTE Band 25 10MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company:		Samsung																																																																																															
	Project #:		4790101660																																																																																															
	Date:		11/5/2021																																																																																															
	Test Engineer:		20882																																																																																															
	Configuration:		EUT, Z-Position																																																																																															
	Location:		Chamber 1																																																																																															
	Mode:		LTE_QPSK Band 25 Fundamentals, 10MHz Bandwidth																																																																																															
	Test Equipment:																																																																																																	
	Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable																																																																																																	
	<table><thead><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr></thead><tbody><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1855.00</td><td>15.62</td><td>V</td><td>4.5</td><td>9.6</td><td>20.71</td><td>33.0</td><td>-12.3</td><td></td></tr><tr><td>1855.00</td><td>20.00</td><td>H</td><td>4.5</td><td>9.6</td><td>25.09</td><td>33.0</td><td>-7.9</td><td></td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1882.50</td><td>16.85</td><td>V</td><td>4.5</td><td>9.4</td><td>21.71</td><td>33.0</td><td>-11.3</td><td></td></tr><tr><td>1882.50</td><td>20.03</td><td>H</td><td>4.5</td><td>9.4</td><td>24.89</td><td>33.0</td><td>-8.1</td><td></td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1910.00</td><td>16.05</td><td>V</td><td>4.5</td><td>9.1</td><td>20.63</td><td>33.0</td><td>-12.4</td><td></td></tr><tr><td>1910.00</td><td>20.23</td><td>H</td><td>4.5</td><td>9.1</td><td>24.81</td><td>33.0</td><td>-8.2</td><td></td></tr></tbody></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1855.00	15.62	V	4.5	9.6	20.71	33.0	-12.3		1855.00	20.00	H	4.5	9.6	25.09	33.0	-7.9		Mid Ch									1882.50	16.85	V	4.5	9.4	21.71	33.0	-11.3		1882.50	20.03	H	4.5	9.4	24.89	33.0	-8.1		High Ch									1910.00	16.05	V	4.5	9.1	20.63	33.0	-12.4		1910.00	20.23	H	4.5	9.1	24.81	33.0	-8.2
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1855.00	15.62	V	4.5	9.6	20.71	33.0	-12.3																																																																																											
1855.00	20.00	H	4.5	9.6	25.09	33.0	-7.9																																																																																											
Mid Ch																																																																																																		
1882.50	16.85	V	4.5	9.4	21.71	33.0	-11.3																																																																																											
1882.50	20.03	H	4.5	9.4	24.89	33.0	-8.1																																																																																											
High Ch																																																																																																		
1910.00	16.05	V	4.5	9.1	20.63	33.0	-12.4																																																																																											
1910.00	20.23	H	4.5	9.1	24.81	33.0	-8.2																																																																																											

LTE Band 25 10MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company:		Samsung																																																																																															
	Project #:		4790101660																																																																																															
	Date:		11/5/2021																																																																																															
	Test Engineer:		20882																																																																																															
	Configuration:		EUT, Z-Position																																																																																															
	Location:		Chamber 1																																																																																															
	Mode:		LTE_16QAM Band 25 Fundamentals, 10MHz Bandwidth																																																																																															
	Test Equipment:																																																																																																	
	Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable																																																																																																	
	<table><thead><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr></thead><tbody><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1855.00</td><td>14.52</td><td>V</td><td>4.5</td><td>9.6</td><td>19.61</td><td>33.0</td><td>-13.4</td><td></td></tr><tr><td>1855.00</td><td>18.82</td><td>H</td><td>4.5</td><td>9.6</td><td>23.91</td><td>33.0</td><td>-9.1</td><td></td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1882.50</td><td>15.64</td><td>V</td><td>4.5</td><td>9.4</td><td>20.50</td><td>33.0</td><td>-12.5</td><td></td></tr><tr><td>1882.50</td><td>19.48</td><td>H</td><td>4.5</td><td>9.4</td><td>24.34</td><td>33.0</td><td>-8.7</td><td></td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1910.00</td><td>15.06</td><td>V</td><td>4.5</td><td>9.1</td><td>19.64</td><td>33.0</td><td>-13.4</td><td></td></tr><tr><td>1910.00</td><td>19.26</td><td>H</td><td>4.5</td><td>9.1</td><td>23.84</td><td>33.0</td><td>-9.2</td><td></td></tr></tbody></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1855.00	14.52	V	4.5	9.6	19.61	33.0	-13.4		1855.00	18.82	H	4.5	9.6	23.91	33.0	-9.1		Mid Ch									1882.50	15.64	V	4.5	9.4	20.50	33.0	-12.5		1882.50	19.48	H	4.5	9.4	24.34	33.0	-8.7		High Ch									1910.00	15.06	V	4.5	9.1	19.64	33.0	-13.4		1910.00	19.26	H	4.5	9.1	23.84	33.0	-9.2
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1855.00	14.52	V	4.5	9.6	19.61	33.0	-13.4																																																																																											
1855.00	18.82	H	4.5	9.6	23.91	33.0	-9.1																																																																																											
Mid Ch																																																																																																		
1882.50	15.64	V	4.5	9.4	20.50	33.0	-12.5																																																																																											
1882.50	19.48	H	4.5	9.4	24.34	33.0	-8.7																																																																																											
High Ch																																																																																																		
1910.00	15.06	V	4.5	9.1	19.64	33.0	-13.4																																																																																											
1910.00	19.26	H	4.5	9.1	23.84	33.0	-9.2																																																																																											

LTE Band 25 5MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/5/2021 Test Engineer: 20882 Configuration: EUT, Z-Position Location: Chamber 1 Mode: LTE_QPSK Band 25 Fundamentals, 5MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>1852.50</td><td>15.64</td><td>V</td><td>4.5</td><td>9.6</td><td>20.75</td><td>33.0</td><td>-12.2</td><td></td></tr><tr><td>1852.50</td><td>19.88</td><td>H</td><td>4.5</td><td>9.6</td><td>24.99</td><td>33.0</td><td>-8.0</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>1882.50</td><td>16.89</td><td>V</td><td>4.5</td><td>9.4</td><td>21.75</td><td>33.0</td><td>-11.2</td><td></td></tr><tr><td>1882.50</td><td>18.95</td><td>H</td><td>4.5</td><td>9.4</td><td>23.81</td><td>33.0</td><td>-9.2</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>1912.50</td><td>16.33</td><td>V</td><td>4.5</td><td>9.1</td><td>20.88</td><td>33.0</td><td>-12.1</td><td></td></tr><tr><td>1912.50</td><td>20.68</td><td>H</td><td>4.5</td><td>9.1</td><td>25.23</td><td>33.0</td><td>-7.8</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1852.50	15.64	V	4.5	9.6	20.75	33.0	-12.2		1852.50	19.88	H	4.5	9.6	24.99	33.0	-8.0		Mid Ch									1882.50	16.89	V	4.5	9.4	21.75	33.0	-11.2		1882.50	18.95	H	4.5	9.4	23.81	33.0	-9.2		High Ch									1912.50	16.33	V	4.5	9.1	20.88	33.0	-12.1		1912.50	20.68	H	4.5	9.1	25.23	33.0	-7.8	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	1852.50	15.64	V	4.5	9.6	20.75	33.0	-12.2																																																																																											
	1852.50	19.88	H	4.5	9.6	24.99	33.0	-8.0																																																																																											
	Mid Ch																																																																																																		
	1882.50	16.89	V	4.5	9.4	21.75	33.0	-11.2																																																																																											
	1882.50	18.95	H	4.5	9.4	23.81	33.0	-9.2																																																																																											
	High Ch																																																																																																		
	1912.50	16.33	V	4.5	9.1	20.88	33.0	-12.1																																																																																											
1912.50	20.68	H	4.5	9.1	25.23	33.0	-7.8																																																																																												
LTE Band 25 5MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/5/2021 Test Engineer: 20882 Configuration: EUT, Z-Position Location: Chamber 1 Mode: LTE_16QAM Band 25 Fundamentals, 5MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>1852.50</td><td>14.41</td><td>V</td><td>4.5</td><td>9.6</td><td>19.52</td><td>33.0</td><td>-13.5</td><td></td></tr><tr><td>1852.50</td><td>19.02</td><td>H</td><td>4.5</td><td>9.6</td><td>24.13</td><td>33.0</td><td>-8.9</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>1882.50</td><td>15.61</td><td>V</td><td>4.5</td><td>9.4</td><td>20.47</td><td>33.0</td><td>-12.5</td><td></td></tr><tr><td>1882.50</td><td>17.83</td><td>H</td><td>4.5</td><td>9.4</td><td>22.69</td><td>33.0</td><td>-10.3</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>1912.50</td><td>15.39</td><td>V</td><td>4.5</td><td>9.1</td><td>19.94</td><td>33.0</td><td>-13.1</td><td></td></tr><tr><td>1912.50</td><td>19.12</td><td>H</td><td>4.5</td><td>9.1</td><td>23.67</td><td>33.0</td><td>-9.3</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1852.50	14.41	V	4.5	9.6	19.52	33.0	-13.5		1852.50	19.02	H	4.5	9.6	24.13	33.0	-8.9		Mid Ch									1882.50	15.61	V	4.5	9.4	20.47	33.0	-12.5		1882.50	17.83	H	4.5	9.4	22.69	33.0	-10.3		High Ch									1912.50	15.39	V	4.5	9.1	19.94	33.0	-13.1		1912.50	19.12	H	4.5	9.1	23.67	33.0	-9.3	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	1852.50	14.41	V	4.5	9.6	19.52	33.0	-13.5																																																																																											
	1852.50	19.02	H	4.5	9.6	24.13	33.0	-8.9																																																																																											
	Mid Ch																																																																																																		
	1882.50	15.61	V	4.5	9.4	20.47	33.0	-12.5																																																																																											
	1882.50	17.83	H	4.5	9.4	22.69	33.0	-10.3																																																																																											
	High Ch																																																																																																		
	1912.50	15.39	V	4.5	9.1	19.94	33.0	-13.1																																																																																											
1912.50	19.12	H	4.5	9.1	23.67	33.0	-9.3																																																																																												

LTE
Band 25

3MHz

QPSK

UL Verification Services, Inc.
High Frequency Substitution Measurement

Company: Samsung
Project #: 4790101660
Date: 11/5/2021
Test Engineer: 20882
Configuration: EUT, Z-Position
Location: Chamber 1
Mode: LTE_QPSK Band 25 Fundamentals, 3MHz Bandwidth

Test Equipment:

Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables
Substitution: Horn 3115[00167211], 8.5m SMA-type Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch								
1851.50	16.79	V	4.5	9.6	21.91	33.0	-11.1	
1851.50	20.28	H	4.5	9.6	25.41	33.0	-7.6	
Mid Ch								
1882.50	16.53	V	4.5	9.4	21.39	33.0	-11.6	
1882.50	20.61	H	4.5	9.4	25.47	33.0	-7.5	
High Ch								
1913.50	16.38	V	4.5	9.1	20.92	33.0	-12.1	
1913.50	20.37	H	4.5	9.1	24.91	33.0	-8.1	

LTE
Band 25

3MHz

16QAM

UL Verification Services, Inc.
High Frequency Substitution Measurement

Company: Samsung
Project #: 4790101660
Date: 11/5/2021
Test Engineer: 20882
Configuration: EUT, Z-Position
Location: Chamber 1
Mode: LTE_16QAM Band 25 Fundamentals, 3MHz Bandwidth

Test Equipment:

Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables
Substitution: Horn 3115[00167211], 8.5m SMA-type Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch								
1851.50	15.79	V	4.5	9.6	20.91	33.0	-12.1	
1851.50	18.91	H	4.5	9.6	24.04	33.0	-9.0	
Mid Ch								
1882.50	15.49	V	4.5	9.4	20.35	33.0	-12.6	
1882.50	19.56	H	4.5	9.4	24.42	33.0	-8.6	
High Ch								
1913.50	15.05	V	4.5	9.1	19.59	33.0	-13.4	
1913.50	19.41	H	4.5	9.1	23.95	33.0	-9.1	

LTE Band 25 1.4MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/5/2021 Test Engineer: 20882 Configuration: EUT, Z-Position Location: Chamber 1 Mode: LTE_QPSK Band 25 Fundamentals, 1.4MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>1850.70</td><td>15.36</td><td>V</td><td>4.5</td><td>9.6</td><td>20.49</td><td>33.0</td><td>-12.5</td><td></td></tr><tr><td>1850.70</td><td>19.95</td><td>H</td><td>4.5</td><td>9.6</td><td>25.08</td><td>33.0</td><td>-7.9</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>1882.50</td><td>16.48</td><td>V</td><td>4.5</td><td>9.4</td><td>21.34</td><td>33.0</td><td>-11.7</td><td></td></tr><tr><td>1882.50</td><td>20.50</td><td>H</td><td>4.5</td><td>9.4</td><td>25.36</td><td>33.0</td><td>-7.6</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>1914.30</td><td>16.29</td><td>V</td><td>4.5</td><td>9.1</td><td>20.81</td><td>33.0</td><td>-12.2</td><td></td></tr><tr><td>1914.30</td><td>20.20</td><td>H</td><td>4.5</td><td>9.1</td><td>24.73</td><td>33.0</td><td>-8.3</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1850.70	15.36	V	4.5	9.6	20.49	33.0	-12.5		1850.70	19.95	H	4.5	9.6	25.08	33.0	-7.9		Mid Ch									1882.50	16.48	V	4.5	9.4	21.34	33.0	-11.7		1882.50	20.50	H	4.5	9.4	25.36	33.0	-7.6		High Ch									1914.30	16.29	V	4.5	9.1	20.81	33.0	-12.2		1914.30	20.20	H	4.5	9.1	24.73	33.0	-8.3	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	1850.70	15.36	V	4.5	9.6	20.49	33.0	-12.5																																																																																											
	1850.70	19.95	H	4.5	9.6	25.08	33.0	-7.9																																																																																											
	Mid Ch																																																																																																		
	1882.50	16.48	V	4.5	9.4	21.34	33.0	-11.7																																																																																											
	1882.50	20.50	H	4.5	9.4	25.36	33.0	-7.6																																																																																											
	High Ch																																																																																																		
	1914.30	16.29	V	4.5	9.1	20.81	33.0	-12.2																																																																																											
1914.30	20.20	H	4.5	9.1	24.73	33.0	-8.3																																																																																												
LTE Band 25 1.4MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/5/2021 Test Engineer: 20882 Configuration: EUT, Z-Position Location: Chamber 1 Mode: LTE_16QAM Band 25 Fundamentals, 1.4MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>1850.70</td><td>15.34</td><td>V</td><td>4.5</td><td>9.6</td><td>20.47</td><td>33.0</td><td>-12.5</td><td></td></tr><tr><td>1850.70</td><td>19.20</td><td>H</td><td>4.5</td><td>9.6</td><td>24.33</td><td>33.0</td><td>-8.7</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>1882.50</td><td>15.46</td><td>V</td><td>4.5</td><td>9.4</td><td>20.32</td><td>33.0</td><td>-12.7</td><td></td></tr><tr><td>1882.50</td><td>19.29</td><td>H</td><td>4.5</td><td>9.4</td><td>24.15</td><td>33.0</td><td>-8.8</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>1914.30</td><td>15.15</td><td>V</td><td>4.5</td><td>9.1</td><td>19.67</td><td>33.0</td><td>-13.3</td><td></td></tr><tr><td>1914.30</td><td>19.24</td><td>H</td><td>4.5</td><td>9.1</td><td>23.77</td><td>33.0</td><td>-9.2</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1850.70	15.34	V	4.5	9.6	20.47	33.0	-12.5		1850.70	19.20	H	4.5	9.6	24.33	33.0	-8.7		Mid Ch									1882.50	15.46	V	4.5	9.4	20.32	33.0	-12.7		1882.50	19.29	H	4.5	9.4	24.15	33.0	-8.8		High Ch									1914.30	15.15	V	4.5	9.1	19.67	33.0	-13.3		1914.30	19.24	H	4.5	9.1	23.77	33.0	-9.2	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	1850.70	15.34	V	4.5	9.6	20.47	33.0	-12.5																																																																																											
	1850.70	19.20	H	4.5	9.6	24.33	33.0	-8.7																																																																																											
	Mid Ch																																																																																																		
	1882.50	15.46	V	4.5	9.4	20.32	33.0	-12.7																																																																																											
	1882.50	19.29	H	4.5	9.4	24.15	33.0	-8.8																																																																																											
	High Ch																																																																																																		
	1914.30	15.15	V	4.5	9.1	19.67	33.0	-13.3																																																																																											
1914.30	19.24	H	4.5	9.1	23.77	33.0	-9.2																																																																																												

LTE Band 26 (Part 90)

LTE Band 26 15MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/9/2021 Test Engineer: 20882 Configuration: EUT, Y-Position Location: Chamber 2 Mode: LTE_QPSK Band 26 Fundamentals, 15MHz Bandwidth Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>821.50</td><td>29.34</td><td>V</td><td>3.0</td><td>-1.4</td><td>24.97</td><td>50.0</td><td>-25.0</td><td>Part 90</td></tr><tr><td>821.50</td><td>18.05</td><td>H</td><td>3.0</td><td>-1.4</td><td>13.69</td><td>50.0</td><td>-36.3</td><td>Part 90</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								821.50	29.34	V	3.0	-1.4	24.97	50.0	-25.0	Part 90	821.50	18.05	H	3.0	-1.4	13.69	50.0	-36.3	Part 90	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																				
	Low Ch																																												
	821.50	29.34	V	3.0	-1.4	24.97	50.0	-25.0	Part 90																																				
	821.50	18.05	H	3.0	-1.4	13.69	50.0	-36.3	Part 90																																				
	LTE Band 26 15MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/9/2021 Test Engineer: 20882 Configuration: EUT, Y-Position Location: Chamber 2 Mode: LTE_16QAM Band 26 Fundamentals, 15MHz Bandwidth Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>821.50</td><td>28.03</td><td>V</td><td>3.0</td><td>-1.4</td><td>23.66</td><td>50.0</td><td>-26.3</td><td>Part 90</td></tr><tr><td>821.50</td><td>16.92</td><td>H</td><td>3.0</td><td>-1.4</td><td>12.56</td><td>50.0</td><td>-37.4</td><td>Part 90</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								821.50	28.03	V	3.0	-1.4	23.66	50.0	-26.3	Part 90	821.50	16.92	H	3.0	-1.4	12.56	50.0	-37.4	Part 90
		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																			
		Low Ch																																											
		821.50	28.03	V	3.0	-1.4	23.66	50.0	-26.3	Part 90																																			
		821.50	16.92	H	3.0	-1.4	12.56	50.0	-37.4	Part 90																																			

LTE Band 26 10MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/9/2021 Test Engineer: 20882 Configuration: EUT, Y-Position Location: Chamber 2 Mode: LTE_QPSK Band 26 Fundamentals, 10MHz Bandwidth Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>819.00</td><td>29.73</td><td>V</td><td>3.0</td><td>-1.4</td><td>25.35</td><td>50.0</td><td>-24.7</td><td>Part 90</td></tr><tr><td>819.00</td><td>18.46</td><td>H</td><td>3.0</td><td>-1.4</td><td>14.08</td><td>50.0</td><td>-35.9</td><td>Part 90</td></tr></table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									819.00	29.73	V	3.0	-1.4	25.35	50.0	-24.7	Part 90	819.00	18.46	H	3.0	-1.4	14.08	50.0	-35.9	Part 90
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																													
Low Ch																																					
819.00	29.73	V	3.0	-1.4	25.35	50.0	-24.7	Part 90																													
819.00	18.46	H	3.0	-1.4	14.08	50.0	-35.9	Part 90																													
LTE Band 26 10MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/9/2021 Test Engineer: 20882 Configuration: EUT, Y-Position Location: Chamber 2 Mode: LTE_16QAM Band 26 Fundamentals, 10MHz Bandwidth Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>819.00</td><td>28.28</td><td>V</td><td>3.0</td><td>-1.4</td><td>23.90</td><td>50.0</td><td>-26.1</td><td>Part 90</td></tr><tr><td>819.00</td><td>17.27</td><td>H</td><td>3.0</td><td>-1.4</td><td>12.89</td><td>50.0</td><td>-37.1</td><td>Part 90</td></tr></table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									819.00	28.28	V	3.0	-1.4	23.90	50.0	-26.1	Part 90	819.00	17.27	H	3.0	-1.4	12.89	50.0	-37.1	Part 90
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																													
Low Ch																																					
819.00	28.28	V	3.0	-1.4	23.90	50.0	-26.1	Part 90																													
819.00	17.27	H	3.0	-1.4	12.89	50.0	-37.1	Part 90																													

LTE Band 26 5MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/9/2021 Test Engineer: 20882 Configuration: EUT, Y-Position Location: Chamber 2 Mode: LTE_QPSK Band 26 Fundamentals, 5MHz Bandwidth Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>816.50</td><td>29.41</td><td>V</td><td>3.0</td><td>-1.4</td><td>25.02</td><td>50.0</td><td>-25.0</td><td>Part 90</td></tr><tr><td>816.50</td><td>18.48</td><td>H</td><td>3.0</td><td>-1.4</td><td>14.08</td><td>50.0</td><td>-35.9</td><td>Part 90</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>821.50</td><td>29.28</td><td>V</td><td>3.0</td><td>-1.4</td><td>24.91</td><td>50.0</td><td>-25.1</td><td>Part 90</td></tr><tr><td>821.50</td><td>18.27</td><td>H</td><td>3.0</td><td>-1.4</td><td>13.91</td><td>50.0</td><td>-36.1</td><td>Part 90</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								816.50	29.41	V	3.0	-1.4	25.02	50.0	-25.0	Part 90	816.50	18.48	H	3.0	-1.4	14.08	50.0	-35.9	Part 90	Mid Ch								821.50	29.28	V	3.0	-1.4	24.91	50.0	-25.1	Part 90	821.50	18.27	H	3.0	-1.4	13.91	50.0	-36.1	Part 90	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																														
	Low Ch																																																																						
	816.50	29.41	V	3.0	-1.4	25.02	50.0	-25.0	Part 90																																																														
	816.50	18.48	H	3.0	-1.4	14.08	50.0	-35.9	Part 90																																																														
	Mid Ch																																																																						
	821.50	29.28	V	3.0	-1.4	24.91	50.0	-25.1	Part 90																																																														
	821.50	18.27	H	3.0	-1.4	13.91	50.0	-36.1	Part 90																																																														
	LTE Band 26 5MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/9/2021 Test Engineer: 20882 Configuration: EUT, Y-Position Location: Chamber 2 Mode: LTE_16QAM Band 26 Fundamentals, 5MHz Bandwidth Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>816.50</td><td>28.38</td><td>V</td><td>3.0</td><td>-1.4</td><td>23.99</td><td>50.0</td><td>-26.0</td><td>Part 90</td></tr><tr><td>816.50</td><td>17.40</td><td>H</td><td>3.0</td><td>-1.4</td><td>13.00</td><td>50.0</td><td>-37.0</td><td>Part 90</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>821.50</td><td>28.14</td><td>V</td><td>3.0</td><td>-1.4</td><td>23.77</td><td>50.0</td><td>-26.2</td><td>Part 90</td></tr><tr><td>821.50</td><td>17.16</td><td>H</td><td>3.0</td><td>-1.4</td><td>12.80</td><td>50.0</td><td>-37.2</td><td>Part 90</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								816.50	28.38	V	3.0	-1.4	23.99	50.0	-26.0	Part 90	816.50	17.40	H	3.0	-1.4	13.00	50.0	-37.0	Part 90	Mid Ch								821.50	28.14	V	3.0	-1.4	23.77	50.0	-26.2	Part 90	821.50	17.16	H	3.0	-1.4	12.80	50.0	-37.2	Part 90
		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																													
Low Ch																																																																							
816.50		28.38	V	3.0	-1.4	23.99	50.0	-26.0	Part 90																																																														
816.50		17.40	H	3.0	-1.4	13.00	50.0	-37.0	Part 90																																																														
Mid Ch																																																																							
821.50		28.14	V	3.0	-1.4	23.77	50.0	-26.2	Part 90																																																														
821.50		17.16	H	3.0	-1.4	12.80	50.0	-37.2	Part 90																																																														

LTE Band 26 3MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/9/2021 Test Engineer: 20882 Configuration: EUT, Y-Position Location: Chamber 2 Mode: LTE_QPSK Band 26 Fundamentals, 3MHz Bandwidth Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>815.50</td><td>29.58</td><td>V</td><td>3.0</td><td>-1.4</td><td>25.17</td><td>50.0</td><td>-24.8</td><td>Part 90</td></tr><tr><td>815.50</td><td>18.14</td><td>H</td><td>3.0</td><td>-1.4</td><td>13.74</td><td>50.0</td><td>-36.3</td><td>Part 90</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>822.50</td><td>29.23</td><td>V</td><td>3.0</td><td>-1.3</td><td>24.88</td><td>50.0</td><td>-25.1</td><td>Part 90</td></tr><tr><td>822.50</td><td>18.63</td><td>H</td><td>3.0</td><td>-1.3</td><td>14.28</td><td>50.0</td><td>-35.7</td><td>Part 90</td></tr></table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									815.50	29.58	V	3.0	-1.4	25.17	50.0	-24.8	Part 90	815.50	18.14	H	3.0	-1.4	13.74	50.0	-36.3	Part 90	Mid Ch									822.50	29.23	V	3.0	-1.3	24.88	50.0	-25.1	Part 90	822.50	18.63	H	3.0	-1.3	14.28	50.0	-35.7	Part 90
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																								
Low Ch																																																																
815.50	29.58	V	3.0	-1.4	25.17	50.0	-24.8	Part 90																																																								
815.50	18.14	H	3.0	-1.4	13.74	50.0	-36.3	Part 90																																																								
Mid Ch																																																																
822.50	29.23	V	3.0	-1.3	24.88	50.0	-25.1	Part 90																																																								
822.50	18.63	H	3.0	-1.3	14.28	50.0	-35.7	Part 90																																																								
LTE Band 26 3MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/9/2021 Test Engineer: 20882 Configuration: EUT, Y-Position Location: Chamber 2 Mode: LTE_16QAM Band 26 Fundamentals, 3MHz Bandwidth Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>815.50</td><td>28.27</td><td>V</td><td>3.0</td><td>-1.4</td><td>23.86</td><td>50.0</td><td>-26.1</td><td>Part 90</td></tr><tr><td>815.50</td><td>17.00</td><td>H</td><td>3.0</td><td>-1.4</td><td>12.60</td><td>50.0</td><td>-37.4</td><td>Part 90</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>822.50</td><td>28.32</td><td>V</td><td>3.0</td><td>-1.3</td><td>23.97</td><td>50.0</td><td>-26.0</td><td>Part 90</td></tr><tr><td>822.50</td><td>17.22</td><td>H</td><td>3.0</td><td>-1.3</td><td>12.87</td><td>50.0</td><td>-37.1</td><td>Part 90</td></tr></table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									815.50	28.27	V	3.0	-1.4	23.86	50.0	-26.1	Part 90	815.50	17.00	H	3.0	-1.4	12.60	50.0	-37.4	Part 90	Mid Ch									822.50	28.32	V	3.0	-1.3	23.97	50.0	-26.0	Part 90	822.50	17.22	H	3.0	-1.3	12.87	50.0	-37.1	Part 90
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																								
Low Ch																																																																
815.50	28.27	V	3.0	-1.4	23.86	50.0	-26.1	Part 90																																																								
815.50	17.00	H	3.0	-1.4	12.60	50.0	-37.4	Part 90																																																								
Mid Ch																																																																
822.50	28.32	V	3.0	-1.3	23.97	50.0	-26.0	Part 90																																																								
822.50	17.22	H	3.0	-1.3	12.87	50.0	-37.1	Part 90																																																								

LTE Band 26 1.4MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/9/2021 Test Engineer: 20882 Configuration: EUT, Y-Position Location: Chamber 2 Mode: LTE_QPSK Band 26 Fundamentals, 1.4MHz Bandwidth Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>814.70</td><td>29.49</td><td>V</td><td>3.0</td><td>-1.4</td><td>25.08</td><td>50.0</td><td>-24.9</td><td>Part 90</td></tr><tr><td>814.70</td><td>18.17</td><td>H</td><td>3.0</td><td>-1.4</td><td>13.76</td><td>50.0</td><td>-36.2</td><td>Part 90</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>823.30</td><td>29.66</td><td>V</td><td>3.0</td><td>-1.3</td><td>25.32</td><td>50.0</td><td>-24.7</td><td>Part 90</td></tr><tr><td>823.30</td><td>18.66</td><td>H</td><td>3.0</td><td>-1.3</td><td>14.32</td><td>50.0</td><td>-35.7</td><td>Part 90</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								814.70	29.49	V	3.0	-1.4	25.08	50.0	-24.9	Part 90	814.70	18.17	H	3.0	-1.4	13.76	50.0	-36.2	Part 90	Mid Ch								823.30	29.66	V	3.0	-1.3	25.32	50.0	-24.7	Part 90	823.30	18.66	H	3.0	-1.3	14.32	50.0	-35.7	Part 90	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																														
	Low Ch																																																																						
	814.70	29.49	V	3.0	-1.4	25.08	50.0	-24.9	Part 90																																																														
	814.70	18.17	H	3.0	-1.4	13.76	50.0	-36.2	Part 90																																																														
	Mid Ch																																																																						
	823.30	29.66	V	3.0	-1.3	25.32	50.0	-24.7	Part 90																																																														
	823.30	18.66	H	3.0	-1.3	14.32	50.0	-35.7	Part 90																																																														
	LTE Band 26 1.4MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/9/2021 Test Engineer: 20882 Configuration: EUT, Y-Position Location: Chamber 2 Mode: LTE_16QAM Band 26 Fundamentals, 1.4MHz Bandwidth Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>814.70</td><td>28.46</td><td>V</td><td>3.0</td><td>-1.4</td><td>24.05</td><td>50.0</td><td>-26.0</td><td>Part 90</td></tr><tr><td>814.70</td><td>17.07</td><td>H</td><td>3.0</td><td>-1.4</td><td>12.66</td><td>50.0</td><td>-37.3</td><td>Part 90</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>823.30</td><td>28.38</td><td>V</td><td>3.0</td><td>-1.3</td><td>24.04</td><td>50.0</td><td>-26.0</td><td>Part 90</td></tr><tr><td>823.30</td><td>17.66</td><td>H</td><td>3.0</td><td>-1.3</td><td>13.32</td><td>50.0</td><td>-36.7</td><td>Part 90</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								814.70	28.46	V	3.0	-1.4	24.05	50.0	-26.0	Part 90	814.70	17.07	H	3.0	-1.4	12.66	50.0	-37.3	Part 90	Mid Ch								823.30	28.38	V	3.0	-1.3	24.04	50.0	-26.0	Part 90	823.30	17.66	H	3.0	-1.3	13.32	50.0	-36.7	Part 90
		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																													
Low Ch																																																																							
814.70		28.46	V	3.0	-1.4	24.05	50.0	-26.0	Part 90																																																														
814.70		17.07	H	3.0	-1.4	12.66	50.0	-37.3	Part 90																																																														
Mid Ch																																																																							
823.30		28.38	V	3.0	-1.3	24.04	50.0	-26.0	Part 90																																																														
823.30		17.66	H	3.0	-1.3	13.32	50.0	-36.7	Part 90																																																														

LTE Band 26 (Part 22)

LTE
Band 26

15MHz

QPSK

UL Verification Services, Inc.

High Frequency Substitution Measurement

Company:

Project #:

Date:

Test Engineer:

Configuration:

Location:

Mode:

Samsung

4790101660

11/9/2021

22943

EUT, Y-Position

Chamber 2

LTE_QPSK Band 26 Fundamentals, 15MHz Bandwidth

Test Equipment:

Receiving: VULB9163-749, and Chamber 2 SMA Cables

Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Straddle Ch								
824.00	28.85	V	3.0	-1.3	24.51	38.5	-14.0	
824.00	18.76	H	3.0	-1.3	14.42	38.5	-24.1	
Mid Ch								
831.50	30.17	V	3.0	-1.3	25.88	38.5	-12.6	
831.50	18.78	H	3.0	-1.3	14.49	38.5	-24.0	
High Ch								
841.50	29.27	V	3.0	-1.2	25.05	38.5	-13.4	
841.50	18.57	H	3.0	-1.2	14.36	38.5	-24.1	

LTE
Band 26

15MHz

16QAM

UL Verification Services, Inc.

High Frequency Substitution Measurement

Company:

Project #:

Date:

Test Engineer:

Configuration:

Location:

Mode:

Samsung

4790101660

11/9/2021

22943

EUT, Y-Position

Chamber 2

LTE_16QAM Band 26 Fundamentals, 15MHz Bandwidth

Test Equipment:

Receiving: VULB9163-749, and Chamber 2 SMA Cables

Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Straddle Ch								
824.00	27.81	V	3.0	-1.3	23.47	38.5	-15.0	
824.00	17.86	H	3.0	-1.3	13.52	38.5	-25.0	
Mid Ch								
831.50	29.40	V	3.0	-1.3	25.11	38.5	-13.4	
831.50	17.63	H	3.0	-1.3	13.34	38.5	-25.2	
High Ch								
841.50	28.19	V	3.0	-1.2	23.97	38.5	-14.5	
841.50	17.27	H	3.0	-1.2	13.06	38.5	-25.4	

LTE Band 26 10MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/9/2021 Test Engineer: 22943 Configuration: EUT, Y-Position Location: Chamber 2 Mode: LTE_QPSK Band 26 Fundamentals, 10MHz Bandwidth Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Straddle Ch</td></tr><tr><td>824.00</td><td>29.13</td><td>V</td><td>3.0</td><td>-1.3</td><td>24.79</td><td>38.5</td><td>-13.7</td><td></td></tr><tr><td>824.00</td><td>18.71</td><td>H</td><td>3.0</td><td>-1.3</td><td>14.37</td><td>38.5</td><td>-24.1</td><td></td></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>829.00</td><td>28.64</td><td>V</td><td>3.0</td><td>-1.3</td><td>24.33</td><td>38.5</td><td>-14.2</td><td></td></tr><tr><td>829.00</td><td>19.31</td><td>H</td><td>3.0</td><td>-1.3</td><td>15.01</td><td>38.5</td><td>-23.5</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>831.50</td><td>29.35</td><td>V</td><td>3.0</td><td>-1.3</td><td>25.06</td><td>38.5</td><td>-13.4</td><td></td></tr><tr><td>831.50</td><td>19.14</td><td>H</td><td>3.0</td><td>-1.3</td><td>14.85</td><td>38.5</td><td>-23.6</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>844.00</td><td>29.11</td><td>V</td><td>3.0</td><td>-1.2</td><td>24.91</td><td>38.5</td><td>-13.6</td><td></td></tr><tr><td>844.00</td><td>18.65</td><td>H</td><td>3.0</td><td>-1.2</td><td>14.46</td><td>38.5</td><td>-24.0</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Straddle Ch									824.00	29.13	V	3.0	-1.3	24.79	38.5	-13.7		824.00	18.71	H	3.0	-1.3	14.37	38.5	-24.1		Low Ch									829.00	28.64	V	3.0	-1.3	24.33	38.5	-14.2		829.00	19.31	H	3.0	-1.3	15.01	38.5	-23.5		Mid Ch									831.50	29.35	V	3.0	-1.3	25.06	38.5	-13.4		831.50	19.14	H	3.0	-1.3	14.85	38.5	-23.6		High Ch									844.00	29.11	V	3.0	-1.2	24.91	38.5	-13.6		844.00	18.65	H	3.0	-1.2	14.46	38.5	-24.0	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																																																					
	Straddle Ch																																																																																																																													
	824.00	29.13	V	3.0	-1.3	24.79	38.5	-13.7																																																																																																																						
	824.00	18.71	H	3.0	-1.3	14.37	38.5	-24.1																																																																																																																						
	Low Ch																																																																																																																													
	829.00	28.64	V	3.0	-1.3	24.33	38.5	-14.2																																																																																																																						
	829.00	19.31	H	3.0	-1.3	15.01	38.5	-23.5																																																																																																																						
	Mid Ch																																																																																																																													
	831.50	29.35	V	3.0	-1.3	25.06	38.5	-13.4																																																																																																																						
	831.50	19.14	H	3.0	-1.3	14.85	38.5	-23.6																																																																																																																						
	High Ch																																																																																																																													
	844.00	29.11	V	3.0	-1.2	24.91	38.5	-13.6																																																																																																																						
	844.00	18.65	H	3.0	-1.2	14.46	38.5	-24.0																																																																																																																						
	LTE Band 26 10MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/9/2021 Test Engineer: 22943 Configuration: EUT, Y-Position Location: Chamber 2 Mode: LTE_16QAM Band 26 Fundamentals, 10MHz Bandwidth Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Straddle Ch</td></tr><tr><td>824.00</td><td>27.92</td><td>V</td><td>3.0</td><td>-1.3</td><td>23.58</td><td>38.5</td><td>-14.9</td><td></td></tr><tr><td>824.00</td><td>17.77</td><td>H</td><td>3.0</td><td>-1.3</td><td>13.43</td><td>38.5</td><td>-25.1</td><td></td></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>829.00</td><td>27.50</td><td>V</td><td>3.0</td><td>-1.3</td><td>23.19</td><td>38.5</td><td>-15.3</td><td></td></tr><tr><td>829.00</td><td>18.04</td><td>H</td><td>3.0</td><td>-1.3</td><td>13.74</td><td>38.5</td><td>-24.8</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>831.50</td><td>29.43</td><td>V</td><td>3.0</td><td>-1.3</td><td>25.14</td><td>38.5</td><td>-13.4</td><td></td></tr><tr><td>831.50</td><td>18.07</td><td>H</td><td>3.0</td><td>-1.3</td><td>13.78</td><td>38.5</td><td>-24.7</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>844.00</td><td>28.08</td><td>V</td><td>3.0</td><td>-1.2</td><td>23.88</td><td>38.5</td><td>-14.6</td><td></td></tr><tr><td>844.00</td><td>17.65</td><td>H</td><td>3.0</td><td>-1.2</td><td>13.46</td><td>38.5</td><td>-25.0</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Straddle Ch									824.00	27.92	V	3.0	-1.3	23.58	38.5	-14.9		824.00	17.77	H	3.0	-1.3	13.43	38.5	-25.1		Low Ch									829.00	27.50	V	3.0	-1.3	23.19	38.5	-15.3		829.00	18.04	H	3.0	-1.3	13.74	38.5	-24.8		Mid Ch									831.50	29.43	V	3.0	-1.3	25.14	38.5	-13.4		831.50	18.07	H	3.0	-1.3	13.78	38.5	-24.7		High Ch									844.00	28.08	V	3.0	-1.2	23.88	38.5	-14.6		844.00	17.65	H	3.0	-1.2	13.46	38.5	-25.0
f MHz		SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																																																					
Straddle Ch																																																																																																																														
824.00		27.92	V	3.0	-1.3	23.58	38.5	-14.9																																																																																																																						
824.00		17.77	H	3.0	-1.3	13.43	38.5	-25.1																																																																																																																						
Low Ch																																																																																																																														
829.00		27.50	V	3.0	-1.3	23.19	38.5	-15.3																																																																																																																						
829.00		18.04	H	3.0	-1.3	13.74	38.5	-24.8																																																																																																																						
Mid Ch																																																																																																																														
831.50		29.43	V	3.0	-1.3	25.14	38.5	-13.4																																																																																																																						
831.50		18.07	H	3.0	-1.3	13.78	38.5	-24.7																																																																																																																						
High Ch																																																																																																																														
844.00		28.08	V	3.0	-1.2	23.88	38.5	-14.6																																																																																																																						
844.00		17.65	H	3.0	-1.2	13.46	38.5	-25.0																																																																																																																						

LTE Band 26 5MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement									
	Company:		Samsung							
	Project #:		4790101660							
	Date:		11/9/2021							
	Test Engineer:		22943							
	Configuration:		EUT, Y-Position							
	Location:		Chamber 2							
	Mode:		LTE_QPSK Band 26 Fundamentals, 5MHz Bandwidth							
	Test Equipment:									
	Receiving:		VULB9163-749, and Chamber 2 SMA Cables							
	Substitution:		Dipole 3121_DB4, 8.5m SMA-type Cable							
	f MHz		SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Straddle Ch									
	824.00		29.09	V	3.0	-1.3	24.75	38.5	-13.8	
824.00		18.77	H	3.0	-1.3	14.43	38.5	-24.1		
Low Ch										
826.50		29.43	V	3.0	-1.3	25.10	38.5	-13.4		
826.50		19.48	H	3.0	-1.3	15.15	38.5	-23.3		
Mid Ch										
831.50		29.51	V	3.0	-1.3	25.22	38.5	-13.3		
831.50		19.56	H	3.0	-1.3	15.27	38.5	-23.2		
High Ch										
846.50		28.15	V	3.0	-1.1	23.97	38.5	-14.5		
846.50		19.19	H	3.0	-1.1	15.01	38.5	-23.5		

LTE Band 26 5MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement									
	Company:		Samsung							
	Project #:		4790101660							
	Date:		11/9/2021							
	Test Engineer:		22943							
	Configuration:		EUT, Y-Position							
	Location:		Chamber 2							
	Mode:		LTE_16QAM Band 26 Fundamentals, 5MHz Bandwidth							
	Test Equipment:									
	Receiving:		VULB9163-749, and Chamber 2 SMA Cables							
	Substitution:		Dipole 3121_DB4, 8.5m SMA-type Cable							
	f MHz		SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Straddle Ch									
	824.00		27.84	V	3.0	-1.3	23.50	38.5	-15.0	
824.00		17.38	H	3.0	-1.3	13.04	38.5	-25.5		
Low Ch										
826.50		28.15	V	3.0	-1.3	23.82	38.5	-14.7		
826.50		18.39	H	3.0	-1.3	14.06	38.5	-24.4		
Mid Ch										
831.50		27.99	V	3.0	-1.3	23.70	38.5	-14.8		
831.50		18.28	H	3.0	-1.3	13.99	38.5	-24.5		
High Ch										
846.50		26.98	V	3.0	-1.1	22.80	38.5	-15.7		
846.50		18.02	H	3.0	-1.1	13.84	38.5	-24.7		

LTE Band 26 3MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement									
	Company:		Samsung							
	Project #:		4790101660							
	Date:		11/9/2021							
	Test Engineer:		22943							
	Configuration:		EUT, Y-Position							
	Location:		Chamber 2							
	Mode:		LTE_QPSK Band 26 Fundamentals, 3MHz Bandwidth							
	Test Equipment:									
	Receiving:		VULB9163-749, and Chamber 2 SMA Cables							
	Substitution:		Dipole 3121_DB4, 8.5m SMA-type Cable							
	f MHz		SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Straddle Ch									
	824.00		28.95	V	3.0	-1.3	24.61	38.5	-13.9	
824.00		19.07	H	3.0	-1.3	14.73	38.5	-23.8		
Low Ch										
825.50		29.25	V	3.0	-1.3	24.92	38.5	-13.6		
825.50		18.74	H	3.0	-1.3	14.41	38.5	-24.1		
Mid Ch										
831.50		29.30	V	3.0	-1.3	25.01	38.5	-13.5		
831.50		19.51	H	3.0	-1.3	15.22	38.5	-23.3		
High Ch										
847.50		27.88	V	3.0	-1.1	23.71	38.5	-14.8		
847.50		19.15	H	3.0	-1.1	14.98	38.5	-23.5		

LTE Band 26 3MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement									
	Company:		Samsung							
	Project #:		4790101660							
	Date:		11/9/2021							
	Test Engineer:		22943							
	Configuration:		EUT, Y-Position							
	Location:		Chamber 2							
	Mode:		LTE_16QAM Band 26 Fundamentals, 3MHz Bandwidth							
	Test Equipment:									
	Receiving:		VULB9163-749, and Chamber 2 SMA Cables							
	Substitution:		Dipole 3121_DB4, 8.5m SMA-type Cable							
	f MHz		SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Straddle Ch									
	824.00		27.62	V	3.0	-1.3	23.28	38.5	-15.2	
824.00		17.93	H	3.0	-1.3	13.59	38.5	-24.9		
Low Ch										
825.50		27.98	V	3.0	-1.3	23.65	38.5	-14.8		
825.50		17.65	H	3.0	-1.3	13.32	38.5	-25.2		
Mid Ch										
831.50		28.34	V	3.0	-1.3	24.05	38.5	-14.5		
831.50		18.23	H	3.0	-1.3	13.94	38.5	-24.6		
High Ch										
847.50		26.70	V	3.0	-1.1	22.53	38.5	-16.0		
847.50		18.29	H	3.0	-1.1	14.12	38.5	-24.4		

LTE Band 26 1.4MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company:		Samsung						
	Project #:		4790101660						
	Date:		11/9/2021						
	Test Engineer:		22943						
	Configuration:		EUT, Y-Position						
	Location:		Chamber 2						
	Mode:		LTE_QPSK Band 26 Fundamentals, 1.4MHz Bandwidth						
	Test Equipment:								
	Receiving: VULB9163-749, and Chamber 2 SMA Cables								
	Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Straddle Ch								
	824.00	28.86	V	3.0	-1.3	24.52	38.5	-14.0	
	824.00	18.66	H	3.0	-1.3	14.32	38.5	-24.2	
Low Ch									
824.70	29.00	V	3.0	-1.3	24.66	38.5	-13.8		
824.70	18.61	H	3.0	-1.3	14.27	38.5	-24.2		
Mid Ch									
831.50	29.13	V	3.0	-1.3	24.84	38.5	-13.7		
831.50	19.51	H	3.0	-1.3	15.22	38.5	-23.3		
High Ch									
848.30	27.52	V	3.1	-1.1	23.35	38.5	-15.1		
848.30	19.35	H	3.1	-1.1	15.18	38.5	-23.3		
LTE Band 26 1.4MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company:		Samsung						
	Project #:		4790101660						
	Date:		11/9/2021						
	Test Engineer:		22943						
	Configuration:		EUT, Y-Position						
	Location:		Chamber 2						
	Mode:		LTE_16QAM Band 26 Fundamentals, 1.4MHz Bandwidth						
	Test Equipment:								
	Receiving: VULB9163-749, and Chamber 2 SMA Cables								
	Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Straddle Ch								
	824.00	27.79	V	3.0	-1.3	23.45	38.5	-15.1	
	824.00	17.36	H	3.0	-1.3	13.02	38.5	-25.5	
Low Ch									
824.70	27.90	V	3.0	-1.3	23.56	38.5	-14.9		
824.70	17.32	H	3.0	-1.3	12.98	38.5	-25.5		
Mid Ch									
831.50	28.06	V	3.0	-1.3	23.77	38.5	-14.7		
831.50	18.41	H	3.0	-1.3	14.12	38.5	-24.4		
High Ch									
848.30	26.14	V	3.1	-1.1	21.97	38.5	-16.5		
848.30	18.05	H	3.1	-1.1	13.88	38.5	-24.6		

LTE Band 41 (PC2)

LTE Band 41 20MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/11/2021 Test Engineer: 20882 Configuration: EUT, X-Position Location: Chamber 2 Mode: LTE_QPSK Band 41 Fundamentals, 20MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>2506.00</td><td>16.95</td><td>V</td><td>5.2</td><td>10.2</td><td>21.90</td><td>33.0</td><td>-11.1</td></tr><tr><td>2506.00</td><td>21.07</td><td>H</td><td>5.2</td><td>10.2</td><td>26.03</td><td>33.0</td><td>-7.0</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>2593.00</td><td>16.81</td><td>V</td><td>5.3</td><td>10.1</td><td>21.59</td><td>33.0</td><td>-11.4</td></tr><tr><td>2593.00</td><td>20.90</td><td>H</td><td>5.3</td><td>10.1</td><td>25.68</td><td>33.0</td><td>-7.3</td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>2680.00</td><td>19.54</td><td>V</td><td>5.4</td><td>10.2</td><td>24.30</td><td>33.0</td><td>-8.7</td></tr><tr><td>2680.00</td><td>20.37</td><td>H</td><td>5.4</td><td>10.2</td><td>25.13</td><td>33.0</td><td>-7.9</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								2506.00	16.95	V	5.2	10.2	21.90	33.0	-11.1	2506.00	21.07	H	5.2	10.2	26.03	33.0	-7.0	Mid Ch								2593.00	16.81	V	5.3	10.1	21.59	33.0	-11.4	2593.00	20.90	H	5.3	10.1	25.68	33.0	-7.3	High Ch								2680.00	19.54	V	5.4	10.2	24.30	33.0	-8.7	2680.00	20.37	H	5.4	10.2	25.13	33.0	-7.9
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																	
	Low Ch																																																																																									
	2506.00	16.95	V	5.2	10.2	21.90	33.0	-11.1																																																																																		
	2506.00	21.07	H	5.2	10.2	26.03	33.0	-7.0																																																																																		
	Mid Ch																																																																																									
	2593.00	16.81	V	5.3	10.1	21.59	33.0	-11.4																																																																																		
	2593.00	20.90	H	5.3	10.1	25.68	33.0	-7.3																																																																																		
	High Ch																																																																																									
	2680.00	19.54	V	5.4	10.2	24.30	33.0	-8.7																																																																																		
2680.00	20.37	H	5.4	10.2	25.13	33.0	-7.9																																																																																			
LTE Band 41 20MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/11/2021 Test Engineer: 20882 Configuration: EUT, X-Position Location: Chamber 2 Mode: LTE_16QAM Band 41 Fundamentals, 20MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>2506.00</td><td>14.91</td><td>V</td><td>5.2</td><td>10.2</td><td>19.86</td><td>33.0</td><td>-13.1</td></tr><tr><td>2506.00</td><td>18.86</td><td>H</td><td>5.2</td><td>10.2</td><td>23.82</td><td>33.0</td><td>-9.2</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>2593.00</td><td>16.25</td><td>V</td><td>5.3</td><td>10.1</td><td>21.03</td><td>33.0</td><td>-12.0</td></tr><tr><td>2593.00</td><td>20.26</td><td>H</td><td>5.3</td><td>10.1</td><td>25.04</td><td>33.0</td><td>-8.0</td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>2680.00</td><td>18.81</td><td>V</td><td>5.4</td><td>10.2</td><td>23.57</td><td>33.0</td><td>-9.4</td></tr><tr><td>2680.00</td><td>19.69</td><td>H</td><td>5.4</td><td>10.2</td><td>24.45</td><td>33.0</td><td>-8.6</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								2506.00	14.91	V	5.2	10.2	19.86	33.0	-13.1	2506.00	18.86	H	5.2	10.2	23.82	33.0	-9.2	Mid Ch								2593.00	16.25	V	5.3	10.1	21.03	33.0	-12.0	2593.00	20.26	H	5.3	10.1	25.04	33.0	-8.0	High Ch								2680.00	18.81	V	5.4	10.2	23.57	33.0	-9.4	2680.00	19.69	H	5.4	10.2	24.45	33.0	-8.6
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																	
	Low Ch																																																																																									
	2506.00	14.91	V	5.2	10.2	19.86	33.0	-13.1																																																																																		
	2506.00	18.86	H	5.2	10.2	23.82	33.0	-9.2																																																																																		
	Mid Ch																																																																																									
	2593.00	16.25	V	5.3	10.1	21.03	33.0	-12.0																																																																																		
	2593.00	20.26	H	5.3	10.1	25.04	33.0	-8.0																																																																																		
	High Ch																																																																																									
	2680.00	18.81	V	5.4	10.2	23.57	33.0	-9.4																																																																																		
2680.00	19.69	H	5.4	10.2	24.45	33.0	-8.6																																																																																			

LTE
Band 41

15MHz

QPSK

UL Verification Services, Inc.
High Frequency Substitution Measurement

Company: Samsung
Project #: 4790101660
Date: 11/11/2021
Test Engineer: 20882
Configuration: EUT, X-Position
Location: Chamber 2
Mode: LTE_QPSK Band 41 Fundamentals, 15MHz Bandwidth

Test Equipment:

Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables
Substitution: Horn 3115[00161451], 8.5m SMA-type Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch								
2503.50	16.17	V	5.2	10.2	21.13	33.0	-11.9	
2503.50	19.22	H	5.2	10.2	24.18	33.0	-8.8	
Mid Ch								
2593.00	17.15	V	5.3	10.1	21.93	33.0	-11.1	
2593.00	21.24	H	5.3	10.1	26.02	33.0	-7.0	
High Ch								
2682.50	19.60	V	5.4	10.2	24.36	33.0	-8.6	
2682.50	20.87	H	5.4	10.2	25.63	33.0	-7.4	

LTE
Band 41

15MHz

16QAM

UL Verification Services, Inc.
High Frequency Substitution Measurement

Company: Samsung
Project #: 4790101660
Date: 11/11/2021
Test Engineer: 20882
Configuration: EUT, X-Position
Location: Chamber 2
Mode: LTE_16QAM Band 41 Fundamentals, 15MHz Bandwidth

Test Equipment:

Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables
Substitution: Horn 3115[00161451], 8.5m SMA-type Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch								
2503.50	16.35	V	5.2	10.2	21.31	33.0	-11.7	
2503.50	18.68	H	5.2	10.2	23.64	33.0	-9.4	
Mid Ch								
2593.00	16.62	V	5.3	10.1	21.40	33.0	-11.6	
2593.00	20.79	H	5.3	10.1	25.57	33.0	-7.4	
High Ch								
2682.50	19.23	V	5.4	10.2	23.99	33.0	-9.0	
2682.50	20.39	H	5.4	10.2	25.15	33.0	-7.8	

LTE Band 41 10MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/11/2021 Test Engineer: 20882 Configuration: EUT, X-Position Location: Chamber 2 Mode: LTE_QPSK Band 41 Fundamentals, 10MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>2501.00</td><td>16.88</td><td>V</td><td>5.2</td><td>10.2</td><td>21.85</td><td>33.0</td><td>-11.2</td><td></td></tr><tr><td>2501.00</td><td>19.66</td><td>H</td><td>5.2</td><td>10.2</td><td>24.63</td><td>33.0</td><td>-8.4</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>2593.00</td><td>17.73</td><td>V</td><td>5.3</td><td>10.1</td><td>22.51</td><td>33.0</td><td>-10.5</td><td></td></tr><tr><td>2593.00</td><td>21.17</td><td>H</td><td>5.3</td><td>10.1</td><td>25.95</td><td>33.0</td><td>-7.0</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>2685.00</td><td>19.63</td><td>V</td><td>5.4</td><td>10.2</td><td>24.39</td><td>33.0</td><td>-8.6</td><td></td></tr><tr><td>2685.00</td><td>20.60</td><td>H</td><td>5.4</td><td>10.2</td><td>25.36</td><td>33.0</td><td>-7.6</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									2501.00	16.88	V	5.2	10.2	21.85	33.0	-11.2		2501.00	19.66	H	5.2	10.2	24.63	33.0	-8.4		Mid Ch									2593.00	17.73	V	5.3	10.1	22.51	33.0	-10.5		2593.00	21.17	H	5.3	10.1	25.95	33.0	-7.0		High Ch									2685.00	19.63	V	5.4	10.2	24.39	33.0	-8.6		2685.00	20.60	H	5.4	10.2	25.36	33.0	-7.6	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	2501.00	16.88	V	5.2	10.2	21.85	33.0	-11.2																																																																																											
	2501.00	19.66	H	5.2	10.2	24.63	33.0	-8.4																																																																																											
	Mid Ch																																																																																																		
	2593.00	17.73	V	5.3	10.1	22.51	33.0	-10.5																																																																																											
	2593.00	21.17	H	5.3	10.1	25.95	33.0	-7.0																																																																																											
	High Ch																																																																																																		
	2685.00	19.63	V	5.4	10.2	24.39	33.0	-8.6																																																																																											
2685.00	20.60	H	5.4	10.2	25.36	33.0	-7.6																																																																																												
LTE Band 41 10MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/11/2021 Test Engineer: 20882 Configuration: EUT, X-Position Location: Chamber 2 Mode: LTE_16QAM Band 41 Fundamentals, 10MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>2501.00</td><td>16.60</td><td>V</td><td>5.2</td><td>10.2</td><td>21.57</td><td>33.0</td><td>-11.4</td><td></td></tr><tr><td>2501.00</td><td>19.04</td><td>H</td><td>5.2</td><td>10.2</td><td>24.01</td><td>33.0</td><td>-9.0</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>2593.00</td><td>17.23</td><td>V</td><td>5.3</td><td>10.1</td><td>22.01</td><td>33.0</td><td>-11.0</td><td></td></tr><tr><td>2593.00</td><td>20.96</td><td>H</td><td>5.3</td><td>10.1</td><td>25.74</td><td>33.0</td><td>-7.3</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>2685.00</td><td>19.05</td><td>V</td><td>5.4</td><td>10.2</td><td>23.81</td><td>33.0</td><td>-9.2</td><td></td></tr><tr><td>2685.00</td><td>20.22</td><td>H</td><td>5.4</td><td>10.2</td><td>24.98</td><td>33.0</td><td>-8.0</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									2501.00	16.60	V	5.2	10.2	21.57	33.0	-11.4		2501.00	19.04	H	5.2	10.2	24.01	33.0	-9.0		Mid Ch									2593.00	17.23	V	5.3	10.1	22.01	33.0	-11.0		2593.00	20.96	H	5.3	10.1	25.74	33.0	-7.3		High Ch									2685.00	19.05	V	5.4	10.2	23.81	33.0	-9.2		2685.00	20.22	H	5.4	10.2	24.98	33.0	-8.0	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	2501.00	16.60	V	5.2	10.2	21.57	33.0	-11.4																																																																																											
	2501.00	19.04	H	5.2	10.2	24.01	33.0	-9.0																																																																																											
	Mid Ch																																																																																																		
	2593.00	17.23	V	5.3	10.1	22.01	33.0	-11.0																																																																																											
	2593.00	20.96	H	5.3	10.1	25.74	33.0	-7.3																																																																																											
	High Ch																																																																																																		
	2685.00	19.05	V	5.4	10.2	23.81	33.0	-9.2																																																																																											
2685.00	20.22	H	5.4	10.2	24.98	33.0	-8.0																																																																																												

LTE Band 41 5MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/11/2021 Test Engineer: 20882 Configuration: EUT, X-Position Location: Chamber 2 Mode: LTE_QPSK Band 41 Fundamentals, 5MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>2498.50</td><td>19.18</td><td>V</td><td>5.2</td><td>10.2</td><td>24.15</td><td>33.0</td><td>-8.9</td><td></td></tr><tr><td>2498.50</td><td>21.36</td><td>H</td><td>5.2</td><td>10.2</td><td>26.33</td><td>33.0</td><td>-6.7</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>2593.00</td><td>19.45</td><td>V</td><td>5.3</td><td>10.1</td><td>24.23</td><td>33.0</td><td>-8.8</td><td></td></tr><tr><td>2593.00</td><td>22.66</td><td>H</td><td>5.3</td><td>10.1</td><td>27.44</td><td>33.0</td><td>-5.6</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>2687.50</td><td>20.92</td><td>V</td><td>5.4</td><td>10.2</td><td>25.69</td><td>33.0</td><td>-7.3</td><td></td></tr><tr><td>2687.50</td><td>22.32</td><td>H</td><td>5.4</td><td>10.2</td><td>27.08</td><td>33.0</td><td>-5.9</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									2498.50	19.18	V	5.2	10.2	24.15	33.0	-8.9		2498.50	21.36	H	5.2	10.2	26.33	33.0	-6.7		Mid Ch									2593.00	19.45	V	5.3	10.1	24.23	33.0	-8.8		2593.00	22.66	H	5.3	10.1	27.44	33.0	-5.6		High Ch									2687.50	20.92	V	5.4	10.2	25.69	33.0	-7.3		2687.50	22.32	H	5.4	10.2	27.08	33.0	-5.9	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	2498.50	19.18	V	5.2	10.2	24.15	33.0	-8.9																																																																																											
	2498.50	21.36	H	5.2	10.2	26.33	33.0	-6.7																																																																																											
	Mid Ch																																																																																																		
	2593.00	19.45	V	5.3	10.1	24.23	33.0	-8.8																																																																																											
	2593.00	22.66	H	5.3	10.1	27.44	33.0	-5.6																																																																																											
	High Ch																																																																																																		
	2687.50	20.92	V	5.4	10.2	25.69	33.0	-7.3																																																																																											
2687.50	22.32	H	5.4	10.2	27.08	33.0	-5.9																																																																																												
LTE Band 41 5MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/11/2021 Test Engineer: 20882 Configuration: EUT, X-Position Location: Chamber 2 Mode: LTE_16QAM Band 41 Fundamentals, 5MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>2498.50</td><td>18.12</td><td>V</td><td>5.2</td><td>10.2</td><td>23.09</td><td>33.0</td><td>-9.9</td><td></td></tr><tr><td>2498.50</td><td>20.54</td><td>H</td><td>5.2</td><td>10.2</td><td>25.51</td><td>33.0</td><td>-7.5</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>2593.00</td><td>18.92</td><td>V</td><td>5.3</td><td>10.1</td><td>23.70</td><td>33.0</td><td>-9.3</td><td></td></tr><tr><td>2593.00</td><td>22.23</td><td>H</td><td>5.3</td><td>10.1</td><td>27.01</td><td>33.0</td><td>-6.0</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>2687.50</td><td>19.72</td><td>V</td><td>5.4</td><td>10.2</td><td>24.49</td><td>33.0</td><td>-8.5</td><td></td></tr><tr><td>2687.50</td><td>21.74</td><td>H</td><td>5.4</td><td>10.2</td><td>26.50</td><td>33.0</td><td>-6.5</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									2498.50	18.12	V	5.2	10.2	23.09	33.0	-9.9		2498.50	20.54	H	5.2	10.2	25.51	33.0	-7.5		Mid Ch									2593.00	18.92	V	5.3	10.1	23.70	33.0	-9.3		2593.00	22.23	H	5.3	10.1	27.01	33.0	-6.0		High Ch									2687.50	19.72	V	5.4	10.2	24.49	33.0	-8.5		2687.50	21.74	H	5.4	10.2	26.50	33.0	-6.5	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	2498.50	18.12	V	5.2	10.2	23.09	33.0	-9.9																																																																																											
	2498.50	20.54	H	5.2	10.2	25.51	33.0	-7.5																																																																																											
	Mid Ch																																																																																																		
	2593.00	18.92	V	5.3	10.1	23.70	33.0	-9.3																																																																																											
	2593.00	22.23	H	5.3	10.1	27.01	33.0	-6.0																																																																																											
	High Ch																																																																																																		
	2687.50	19.72	V	5.4	10.2	24.49	33.0	-8.5																																																																																											
2687.50	21.74	H	5.4	10.2	26.50	33.0	-6.5																																																																																												

LTE Band 66

LTE Band 66 20MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/8/2021 Test Engineer: 19568 Configuration: EUT, Z-Position Location: Chamber 2 Mode: LTE_QPSK Band 66 Fundamentals, 20MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>1720.00</td><td>16.50</td><td>V</td><td>4.3</td><td>9.6</td><td>21.80</td><td>30.0</td><td>-8.2</td><td></td></tr><tr><td>1720.00</td><td>18.98</td><td>H</td><td>4.3</td><td>9.6</td><td>24.28</td><td>30.0</td><td>-5.7</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>1745.00</td><td>15.46</td><td>V</td><td>4.3</td><td>9.7</td><td>20.81</td><td>30.0</td><td>-9.2</td><td></td></tr><tr><td>1745.00</td><td>18.93</td><td>H</td><td>4.3</td><td>9.7</td><td>24.28</td><td>30.0</td><td>-5.7</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>1770.00</td><td>15.06</td><td>V</td><td>4.4</td><td>9.7</td><td>20.40</td><td>30.0</td><td>-9.6</td><td></td></tr><tr><td>1770.00</td><td>19.47</td><td>H</td><td>4.4</td><td>9.7</td><td>24.81</td><td>30.0</td><td>-5.2</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1720.00	16.50	V	4.3	9.6	21.80	30.0	-8.2		1720.00	18.98	H	4.3	9.6	24.28	30.0	-5.7		Mid Ch									1745.00	15.46	V	4.3	9.7	20.81	30.0	-9.2		1745.00	18.93	H	4.3	9.7	24.28	30.0	-5.7		High Ch									1770.00	15.06	V	4.4	9.7	20.40	30.0	-9.6		1770.00	19.47	H	4.4	9.7	24.81	30.0	-5.2	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	1720.00	16.50	V	4.3	9.6	21.80	30.0	-8.2																																																																																											
	1720.00	18.98	H	4.3	9.6	24.28	30.0	-5.7																																																																																											
	Mid Ch																																																																																																		
	1745.00	15.46	V	4.3	9.7	20.81	30.0	-9.2																																																																																											
	1745.00	18.93	H	4.3	9.7	24.28	30.0	-5.7																																																																																											
	High Ch																																																																																																		
	1770.00	15.06	V	4.4	9.7	20.40	30.0	-9.6																																																																																											
1770.00	19.47	H	4.4	9.7	24.81	30.0	-5.2																																																																																												
LTE Band 66 20MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/8/2021 Test Engineer: 19568 Configuration: EUT, Z-Position Location: Chamber 2 Mode: LTE_16QAM Band 66 Fundamentals, 20MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>1720.00</td><td>15.64</td><td>V</td><td>4.3</td><td>9.6</td><td>20.94</td><td>30.0</td><td>-9.1</td><td></td></tr><tr><td>1720.00</td><td>17.92</td><td>H</td><td>4.3</td><td>9.6</td><td>23.22</td><td>30.0</td><td>-6.8</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>1745.00</td><td>14.52</td><td>V</td><td>4.3</td><td>9.7</td><td>19.87</td><td>30.0</td><td>-10.1</td><td></td></tr><tr><td>1745.00</td><td>17.84</td><td>H</td><td>4.3</td><td>9.7</td><td>23.19</td><td>30.0</td><td>-6.8</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>1770.00</td><td>13.62</td><td>V</td><td>4.4</td><td>9.7</td><td>18.96</td><td>30.0</td><td>-11.0</td><td></td></tr><tr><td>1770.00</td><td>18.13</td><td>H</td><td>4.4</td><td>9.7</td><td>23.47</td><td>30.0</td><td>-6.5</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1720.00	15.64	V	4.3	9.6	20.94	30.0	-9.1		1720.00	17.92	H	4.3	9.6	23.22	30.0	-6.8		Mid Ch									1745.00	14.52	V	4.3	9.7	19.87	30.0	-10.1		1745.00	17.84	H	4.3	9.7	23.19	30.0	-6.8		High Ch									1770.00	13.62	V	4.4	9.7	18.96	30.0	-11.0		1770.00	18.13	H	4.4	9.7	23.47	30.0	-6.5	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	1720.00	15.64	V	4.3	9.6	20.94	30.0	-9.1																																																																																											
	1720.00	17.92	H	4.3	9.6	23.22	30.0	-6.8																																																																																											
	Mid Ch																																																																																																		
	1745.00	14.52	V	4.3	9.7	19.87	30.0	-10.1																																																																																											
	1745.00	17.84	H	4.3	9.7	23.19	30.0	-6.8																																																																																											
	High Ch																																																																																																		
	1770.00	13.62	V	4.4	9.7	18.96	30.0	-11.0																																																																																											
1770.00	18.13	H	4.4	9.7	23.47	30.0	-6.5																																																																																												

LTE Band 66 15MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement							
	Company: Samsung Project #: 4790101660 Date: 11/8/2021 Test Engineer: 19568 Configuration: EUT, Z-Position Location: Chamber 2 Mode: LTE_QPSK Band 66 Fundamentals, 15MHz Bandwidth							
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable							
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)
	Low Ch							
	1717.50	16.64	V	4.3	9.6	21.94	30.0	-8.1
	1717.50	18.79	H	4.3	9.6	24.08	30.0	-5.9
	Mid Ch							
	1745.00	16.57	V	4.3	9.7	21.92	30.0	-8.1
	1745.00	19.17	H	4.3	9.7	24.52	30.0	-5.5
LTE Band 66 15MHz 16QAM	High Ch							
	1772.50	14.80	V	4.4	9.7	20.14	30.0	-9.9
	1772.50	19.08	H	4.4	9.7	24.42	30.0	-5.6
LTE Band 66 15MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement							
	Company: Samsung Project #: 4790101660 Date: 11/8/2021 Test Engineer: 19568 Configuration: EUT, Z-Position Location: Chamber 2 Mode: LTE_16QAM Band 66 Fundamentals, 15MHz Bandwidth							
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable							
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)
	Low Ch							
	1717.50	15.47	V	4.3	9.6	20.77	30.0	-9.2
	1717.50	17.85	H	4.3	9.6	23.14	30.0	-6.9
	Mid Ch							
	1745.00	15.52	V	4.3	9.7	20.87	30.0	-9.1
	1745.00	18.17	H	4.3	9.7	23.52	30.0	-6.5
LTE Band 66 15MHz 16QAM	High Ch							
	1772.50	14.41	V	4.4	9.7	19.75	30.0	-10.3
	1772.50	17.98	H	4.4	9.7	23.32	30.0	-6.7

LTE Band 66 10MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/8/2021 Test Engineer: 19568 Configuration: EUT, Z-Position Location: Chamber 2 Mode: LTE_QPSK Band 66 Fundamentals, 10MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>1715.00</td><td>16.95</td><td>V</td><td>4.3</td><td>9.6</td><td>22.24</td><td>30.0</td><td>-7.8</td><td></td></tr><tr><td>1715.00</td><td>18.75</td><td>H</td><td>4.3</td><td>9.6</td><td>24.04</td><td>30.0</td><td>-6.0</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>1745.00</td><td>15.42</td><td>V</td><td>4.3</td><td>9.7</td><td>20.77</td><td>30.0</td><td>-9.2</td><td></td></tr><tr><td>1745.00</td><td>19.55</td><td>H</td><td>4.3</td><td>9.7</td><td>24.90</td><td>30.0</td><td>-5.1</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>1775.00</td><td>15.13</td><td>V</td><td>4.4</td><td>9.7</td><td>20.46</td><td>30.0</td><td>-9.5</td><td></td></tr><tr><td>1775.00</td><td>18.62</td><td>H</td><td>4.4</td><td>9.7</td><td>23.96</td><td>30.0</td><td>-6.0</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1715.00	16.95	V	4.3	9.6	22.24	30.0	-7.8		1715.00	18.75	H	4.3	9.6	24.04	30.0	-6.0		Mid Ch									1745.00	15.42	V	4.3	9.7	20.77	30.0	-9.2		1745.00	19.55	H	4.3	9.7	24.90	30.0	-5.1		High Ch									1775.00	15.13	V	4.4	9.7	20.46	30.0	-9.5		1775.00	18.62	H	4.4	9.7	23.96	30.0	-6.0	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	1715.00	16.95	V	4.3	9.6	22.24	30.0	-7.8																																																																																											
	1715.00	18.75	H	4.3	9.6	24.04	30.0	-6.0																																																																																											
	Mid Ch																																																																																																		
	1745.00	15.42	V	4.3	9.7	20.77	30.0	-9.2																																																																																											
	1745.00	19.55	H	4.3	9.7	24.90	30.0	-5.1																																																																																											
	High Ch																																																																																																		
	1775.00	15.13	V	4.4	9.7	20.46	30.0	-9.5																																																																																											
1775.00	18.62	H	4.4	9.7	23.96	30.0	-6.0																																																																																												
LTE Band 66 10MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/8/2021 Test Engineer: 19568 Configuration: EUT, Z-Position Location: Chamber 2 Mode: LTE_16QAM Band 66 Fundamentals, 10MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>1715.00</td><td>15.89</td><td>V</td><td>4.3</td><td>9.6</td><td>21.18</td><td>30.0</td><td>-8.8</td><td></td></tr><tr><td>1715.00</td><td>17.65</td><td>H</td><td>4.3</td><td>9.6</td><td>22.94</td><td>30.0</td><td>-7.1</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>1745.00</td><td>14.25</td><td>V</td><td>4.3</td><td>9.7</td><td>19.60</td><td>30.0</td><td>-10.4</td><td></td></tr><tr><td>1745.00</td><td>18.50</td><td>H</td><td>4.3</td><td>9.7</td><td>23.85</td><td>30.0</td><td>-6.2</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>1775.00</td><td>14.01</td><td>V</td><td>4.4</td><td>9.7</td><td>19.34</td><td>30.0</td><td>-10.7</td><td></td></tr><tr><td>1775.00</td><td>17.36</td><td>H</td><td>4.4</td><td>9.7</td><td>22.70</td><td>30.0</td><td>-7.3</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1715.00	15.89	V	4.3	9.6	21.18	30.0	-8.8		1715.00	17.65	H	4.3	9.6	22.94	30.0	-7.1		Mid Ch									1745.00	14.25	V	4.3	9.7	19.60	30.0	-10.4		1745.00	18.50	H	4.3	9.7	23.85	30.0	-6.2		High Ch									1775.00	14.01	V	4.4	9.7	19.34	30.0	-10.7		1775.00	17.36	H	4.4	9.7	22.70	30.0	-7.3	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	1715.00	15.89	V	4.3	9.6	21.18	30.0	-8.8																																																																																											
	1715.00	17.65	H	4.3	9.6	22.94	30.0	-7.1																																																																																											
	Mid Ch																																																																																																		
	1745.00	14.25	V	4.3	9.7	19.60	30.0	-10.4																																																																																											
	1745.00	18.50	H	4.3	9.7	23.85	30.0	-6.2																																																																																											
	High Ch																																																																																																		
	1775.00	14.01	V	4.4	9.7	19.34	30.0	-10.7																																																																																											
1775.00	17.36	H	4.4	9.7	22.70	30.0	-7.3																																																																																												

LTE Band 66 5MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/8/2021 Test Engineer: 19568 Configuration: EUT, Z-Position Location: Chamber 2 Mode: LTE_QPSK Band 66 Fundamentals, 5MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>1712.50</td><td>17.00</td><td>V</td><td>4.3</td><td>9.6</td><td>22.29</td><td>30.0</td><td>-7.7</td><td></td></tr><tr><td>1712.50</td><td>18.93</td><td>H</td><td>4.3</td><td>9.6</td><td>24.22</td><td>30.0</td><td>-5.8</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>1745.00</td><td>15.62</td><td>V</td><td>4.3</td><td>9.7</td><td>20.97</td><td>30.0</td><td>-9.0</td><td></td></tr><tr><td>1745.00</td><td>18.78</td><td>H</td><td>4.3</td><td>9.7</td><td>24.13</td><td>30.0</td><td>-5.9</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>1777.50</td><td>17.87</td><td>V</td><td>4.4</td><td>9.7</td><td>23.21</td><td>30.0</td><td>-6.8</td><td></td></tr><tr><td>1777.50</td><td>18.49</td><td>H</td><td>4.4</td><td>9.7</td><td>23.83</td><td>30.0</td><td>-6.2</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1712.50	17.00	V	4.3	9.6	22.29	30.0	-7.7		1712.50	18.93	H	4.3	9.6	24.22	30.0	-5.8		Mid Ch									1745.00	15.62	V	4.3	9.7	20.97	30.0	-9.0		1745.00	18.78	H	4.3	9.7	24.13	30.0	-5.9		High Ch									1777.50	17.87	V	4.4	9.7	23.21	30.0	-6.8		1777.50	18.49	H	4.4	9.7	23.83	30.0	-6.2	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	1712.50	17.00	V	4.3	9.6	22.29	30.0	-7.7																																																																																											
	1712.50	18.93	H	4.3	9.6	24.22	30.0	-5.8																																																																																											
	Mid Ch																																																																																																		
	1745.00	15.62	V	4.3	9.7	20.97	30.0	-9.0																																																																																											
	1745.00	18.78	H	4.3	9.7	24.13	30.0	-5.9																																																																																											
	High Ch																																																																																																		
	1777.50	17.87	V	4.4	9.7	23.21	30.0	-6.8																																																																																											
1777.50	18.49	H	4.4	9.7	23.83	30.0	-6.2																																																																																												
LTE Band 66 5MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/8/2021 Test Engineer: 19568 Configuration: EUT, Z-Position Location: Chamber 2 Mode: LTE_16QAM Band 66 Fundamentals, 5MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>1712.50</td><td>15.85</td><td>V</td><td>4.3</td><td>9.6</td><td>21.14</td><td>30.0</td><td>-8.9</td><td></td></tr><tr><td>1712.50</td><td>17.80</td><td>H</td><td>4.3</td><td>9.6</td><td>23.09</td><td>30.0</td><td>-6.9</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>1745.00</td><td>14.41</td><td>V</td><td>4.3</td><td>9.7</td><td>19.76</td><td>30.0</td><td>-10.2</td><td></td></tr><tr><td>1745.00</td><td>17.61</td><td>H</td><td>4.3</td><td>9.7</td><td>22.96</td><td>30.0</td><td>-7.0</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>1777.50</td><td>14.23</td><td>V</td><td>4.4</td><td>9.7</td><td>19.57</td><td>30.0</td><td>-10.4</td><td></td></tr><tr><td>1777.50</td><td>17.63</td><td>H</td><td>4.4</td><td>9.7</td><td>22.97</td><td>30.0</td><td>-7.0</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1712.50	15.85	V	4.3	9.6	21.14	30.0	-8.9		1712.50	17.80	H	4.3	9.6	23.09	30.0	-6.9		Mid Ch									1745.00	14.41	V	4.3	9.7	19.76	30.0	-10.2		1745.00	17.61	H	4.3	9.7	22.96	30.0	-7.0		High Ch									1777.50	14.23	V	4.4	9.7	19.57	30.0	-10.4		1777.50	17.63	H	4.4	9.7	22.97	30.0	-7.0	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	1712.50	15.85	V	4.3	9.6	21.14	30.0	-8.9																																																																																											
	1712.50	17.80	H	4.3	9.6	23.09	30.0	-6.9																																																																																											
	Mid Ch																																																																																																		
	1745.00	14.41	V	4.3	9.7	19.76	30.0	-10.2																																																																																											
	1745.00	17.61	H	4.3	9.7	22.96	30.0	-7.0																																																																																											
	High Ch																																																																																																		
	1777.50	14.23	V	4.4	9.7	19.57	30.0	-10.4																																																																																											
1777.50	17.63	H	4.4	9.7	22.97	30.0	-7.0																																																																																												

LTE Band 66 3MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/8/2021 Test Engineer: 19568 Configuration: EUT, Z-Position Location: Chamber 2 Mode: LTE_QPSK Band 66 Fundamentals, 3MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>1711.50</td><td>17.16</td><td>V</td><td>4.3</td><td>9.6</td><td>22.45</td><td>30.0</td><td>-7.6</td><td></td></tr><tr><td>1711.50</td><td>18.86</td><td>H</td><td>4.3</td><td>9.6</td><td>24.14</td><td>30.0</td><td>-5.9</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>1745.00</td><td>15.58</td><td>V</td><td>4.3</td><td>9.7</td><td>20.93</td><td>30.0</td><td>-9.1</td><td></td></tr><tr><td>1745.00</td><td>19.28</td><td>H</td><td>4.3</td><td>9.7</td><td>24.63</td><td>30.0</td><td>-5.4</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>1778.50</td><td>15.11</td><td>V</td><td>4.4</td><td>9.7</td><td>20.45</td><td>30.0</td><td>-9.6</td><td></td></tr><tr><td>1778.50</td><td>18.53</td><td>H</td><td>4.4</td><td>9.7</td><td>23.86</td><td>30.0</td><td>-6.1</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1711.50	17.16	V	4.3	9.6	22.45	30.0	-7.6		1711.50	18.86	H	4.3	9.6	24.14	30.0	-5.9		Mid Ch									1745.00	15.58	V	4.3	9.7	20.93	30.0	-9.1		1745.00	19.28	H	4.3	9.7	24.63	30.0	-5.4		High Ch									1778.50	15.11	V	4.4	9.7	20.45	30.0	-9.6		1778.50	18.53	H	4.4	9.7	23.86	30.0	-6.1	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	1711.50	17.16	V	4.3	9.6	22.45	30.0	-7.6																																																																																											
	1711.50	18.86	H	4.3	9.6	24.14	30.0	-5.9																																																																																											
	Mid Ch																																																																																																		
	1745.00	15.58	V	4.3	9.7	20.93	30.0	-9.1																																																																																											
	1745.00	19.28	H	4.3	9.7	24.63	30.0	-5.4																																																																																											
	High Ch																																																																																																		
	1778.50	15.11	V	4.4	9.7	20.45	30.0	-9.6																																																																																											
1778.50	18.53	H	4.4	9.7	23.86	30.0	-6.1																																																																																												
LTE Band 66 3MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/8/2021 Test Engineer: 19568 Configuration: EUT, Z-Position Location: Chamber 2 Mode: LTE_16QAM Band 66 Fundamentals, 3MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>1711.50</td><td>16.03</td><td>V</td><td>4.3</td><td>9.6</td><td>21.32</td><td>30.0</td><td>-8.7</td><td></td></tr><tr><td>1711.50</td><td>17.58</td><td>H</td><td>4.3</td><td>9.6</td><td>22.86</td><td>30.0</td><td>-7.1</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>1745.00</td><td>14.57</td><td>V</td><td>4.3</td><td>9.7</td><td>19.92</td><td>30.0</td><td>-10.1</td><td></td></tr><tr><td>1745.00</td><td>18.38</td><td>H</td><td>4.3</td><td>9.7</td><td>23.73</td><td>30.0</td><td>-6.3</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>1778.50</td><td>14.26</td><td>V</td><td>4.4</td><td>9.7</td><td>19.60</td><td>30.0</td><td>-10.4</td><td></td></tr><tr><td>1778.50</td><td>17.97</td><td>H</td><td>4.4</td><td>9.7</td><td>23.30</td><td>30.0</td><td>-6.7</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1711.50	16.03	V	4.3	9.6	21.32	30.0	-8.7		1711.50	17.58	H	4.3	9.6	22.86	30.0	-7.1		Mid Ch									1745.00	14.57	V	4.3	9.7	19.92	30.0	-10.1		1745.00	18.38	H	4.3	9.7	23.73	30.0	-6.3		High Ch									1778.50	14.26	V	4.4	9.7	19.60	30.0	-10.4		1778.50	17.97	H	4.4	9.7	23.30	30.0	-6.7	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	1711.50	16.03	V	4.3	9.6	21.32	30.0	-8.7																																																																																											
	1711.50	17.58	H	4.3	9.6	22.86	30.0	-7.1																																																																																											
	Mid Ch																																																																																																		
	1745.00	14.57	V	4.3	9.7	19.92	30.0	-10.1																																																																																											
	1745.00	18.38	H	4.3	9.7	23.73	30.0	-6.3																																																																																											
	High Ch																																																																																																		
	1778.50	14.26	V	4.4	9.7	19.60	30.0	-10.4																																																																																											
1778.50	17.97	H	4.4	9.7	23.30	30.0	-6.7																																																																																												

LTE Band 66 1.4MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/8/2021 Test Engineer: 19568 Configuration: EUT, Z-Position Location: Chamber 2 Mode: LTE_QPSK Band 66 Fundamentals, 1.4MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>1710.70</td><td>17.00</td><td>V</td><td>4.3</td><td>9.6</td><td>22.28</td><td>30.0</td><td>-7.7</td><td></td></tr><tr><td>1710.70</td><td>18.88</td><td>H</td><td>4.3</td><td>9.6</td><td>24.16</td><td>30.0</td><td>-5.8</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>1745.00</td><td>16.17</td><td>V</td><td>4.3</td><td>9.7</td><td>21.52</td><td>30.0</td><td>-8.5</td><td></td></tr><tr><td>1745.00</td><td>19.47</td><td>H</td><td>4.3</td><td>9.7</td><td>24.82</td><td>30.0</td><td>-5.2</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>1779.30</td><td>15.09</td><td>V</td><td>4.4</td><td>9.7</td><td>20.43</td><td>30.0</td><td>-9.6</td><td></td></tr><tr><td>1779.30</td><td>18.58</td><td>H</td><td>4.4</td><td>9.7</td><td>23.92</td><td>30.0</td><td>-6.1</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1710.70	17.00	V	4.3	9.6	22.28	30.0	-7.7		1710.70	18.88	H	4.3	9.6	24.16	30.0	-5.8		Mid Ch									1745.00	16.17	V	4.3	9.7	21.52	30.0	-8.5		1745.00	19.47	H	4.3	9.7	24.82	30.0	-5.2		High Ch									1779.30	15.09	V	4.4	9.7	20.43	30.0	-9.6		1779.30	18.58	H	4.4	9.7	23.92	30.0	-6.1	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	1710.70	17.00	V	4.3	9.6	22.28	30.0	-7.7																																																																																											
	1710.70	18.88	H	4.3	9.6	24.16	30.0	-5.8																																																																																											
	Mid Ch																																																																																																		
	1745.00	16.17	V	4.3	9.7	21.52	30.0	-8.5																																																																																											
	1745.00	19.47	H	4.3	9.7	24.82	30.0	-5.2																																																																																											
	High Ch																																																																																																		
	1779.30	15.09	V	4.4	9.7	20.43	30.0	-9.6																																																																																											
1779.30	18.58	H	4.4	9.7	23.92	30.0	-6.1																																																																																												
LTE Band 66 1.4MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/9/2021 Test Engineer: 22943 Configuration: EUT, Z-Position Location: Chamber 2 Mode: LTE_16QAM Band 66 Fundamentals, 1.4MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>1710.70</td><td>15.73</td><td>V</td><td>4.3</td><td>9.6</td><td>21.01</td><td>30.0</td><td>-9.0</td><td></td></tr><tr><td>1710.70</td><td>17.81</td><td>H</td><td>4.3</td><td>9.6</td><td>23.09</td><td>30.0</td><td>-6.9</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>1745.00</td><td>15.39</td><td>V</td><td>4.3</td><td>9.7</td><td>20.74</td><td>30.0</td><td>-9.3</td><td></td></tr><tr><td>1745.00</td><td>18.15</td><td>H</td><td>4.3</td><td>9.7</td><td>23.50</td><td>30.0</td><td>-6.5</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>1779.30</td><td>13.56</td><td>V</td><td>4.4</td><td>9.7</td><td>18.90</td><td>30.0</td><td>-11.1</td><td></td></tr><tr><td>1779.30</td><td>17.46</td><td>H</td><td>4.4</td><td>9.7</td><td>22.80</td><td>30.0</td><td>-7.2</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1710.70	15.73	V	4.3	9.6	21.01	30.0	-9.0		1710.70	17.81	H	4.3	9.6	23.09	30.0	-6.9		Mid Ch									1745.00	15.39	V	4.3	9.7	20.74	30.0	-9.3		1745.00	18.15	H	4.3	9.7	23.50	30.0	-6.5		High Ch									1779.30	13.56	V	4.4	9.7	18.90	30.0	-11.1		1779.30	17.46	H	4.4	9.7	22.80	30.0	-7.2	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	1710.70	15.73	V	4.3	9.6	21.01	30.0	-9.0																																																																																											
	1710.70	17.81	H	4.3	9.6	23.09	30.0	-6.9																																																																																											
	Mid Ch																																																																																																		
	1745.00	15.39	V	4.3	9.7	20.74	30.0	-9.3																																																																																											
	1745.00	18.15	H	4.3	9.7	23.50	30.0	-6.5																																																																																											
	High Ch																																																																																																		
	1779.30	13.56	V	4.4	9.7	18.90	30.0	-11.1																																																																																											
1779.30	17.46	H	4.4	9.7	22.80	30.0	-7.2																																																																																												

NR Band 5

NR Band 5 20MHz DFT-s QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/11/2021 Test Engineer: 25546 Configuration: EUT, Y-Position Location: Chamber 1 Mode: LTE_QPSK NR n5 Fundamentals, 20MHz Bandwidth Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>834.00</td><td>26.73</td><td>V</td><td>3.0</td><td>-1.2</td><td>22.46</td><td>38.5</td><td>-16.0</td><td></td></tr><tr><td>834.00</td><td>16.08</td><td>H</td><td>3.0</td><td>-1.2</td><td>11.81</td><td>38.5</td><td>-26.7</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>836.50</td><td>26.25</td><td>V</td><td>3.0</td><td>-1.2</td><td>22.00</td><td>38.5</td><td>-16.5</td><td></td></tr><tr><td>836.50</td><td>15.96</td><td>H</td><td>3.0</td><td>-1.2</td><td>11.71</td><td>38.5</td><td>-26.8</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>839.00</td><td>25.93</td><td>V</td><td>3.0</td><td>-1.2</td><td>21.70</td><td>38.5</td><td>-16.8</td><td></td></tr><tr><td>839.00</td><td>16.07</td><td>H</td><td>3.0</td><td>-1.2</td><td>11.84</td><td>38.5</td><td>-26.7</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									834.00	26.73	V	3.0	-1.2	22.46	38.5	-16.0		834.00	16.08	H	3.0	-1.2	11.81	38.5	-26.7		Mid Ch									836.50	26.25	V	3.0	-1.2	22.00	38.5	-16.5		836.50	15.96	H	3.0	-1.2	11.71	38.5	-26.8		High Ch									839.00	25.93	V	3.0	-1.2	21.70	38.5	-16.8		839.00	16.07	H	3.0	-1.2	11.84	38.5	-26.7	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	834.00	26.73	V	3.0	-1.2	22.46	38.5	-16.0																																																																																											
	834.00	16.08	H	3.0	-1.2	11.81	38.5	-26.7																																																																																											
	Mid Ch																																																																																																		
	836.50	26.25	V	3.0	-1.2	22.00	38.5	-16.5																																																																																											
	836.50	15.96	H	3.0	-1.2	11.71	38.5	-26.8																																																																																											
	High Ch																																																																																																		
	839.00	25.93	V	3.0	-1.2	21.70	38.5	-16.8																																																																																											
839.00	16.07	H	3.0	-1.2	11.84	38.5	-26.7																																																																																												
NR Band 5 20MHz DFT-s 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/11/2021 Test Engineer: 25546 Configuration: EUT, Y-Position Location: Chamber 1 Mode: LTE_16QAM NR n5 Fundamentals, 20MHz Bandwidth Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>834.00</td><td>25.41</td><td>V</td><td>3.0</td><td>-1.2</td><td>21.14</td><td>38.5</td><td>-17.4</td><td></td></tr><tr><td>834.00</td><td>15.14</td><td>H</td><td>3.0</td><td>-1.2</td><td>10.87</td><td>38.5</td><td>-27.6</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>836.50</td><td>24.67</td><td>V</td><td>3.0</td><td>-1.2</td><td>20.42</td><td>38.5</td><td>-18.1</td><td></td></tr><tr><td>836.50</td><td>14.70</td><td>H</td><td>3.0</td><td>-1.2</td><td>10.45</td><td>38.5</td><td>-28.1</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>839.00</td><td>24.66</td><td>V</td><td>3.0</td><td>-1.2</td><td>20.43</td><td>38.5</td><td>-18.1</td><td></td></tr><tr><td>839.00</td><td>14.97</td><td>H</td><td>3.0</td><td>-1.2</td><td>10.74</td><td>38.5</td><td>-27.8</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									834.00	25.41	V	3.0	-1.2	21.14	38.5	-17.4		834.00	15.14	H	3.0	-1.2	10.87	38.5	-27.6		Mid Ch									836.50	24.67	V	3.0	-1.2	20.42	38.5	-18.1		836.50	14.70	H	3.0	-1.2	10.45	38.5	-28.1		High Ch									839.00	24.66	V	3.0	-1.2	20.43	38.5	-18.1		839.00	14.97	H	3.0	-1.2	10.74	38.5	-27.8	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	834.00	25.41	V	3.0	-1.2	21.14	38.5	-17.4																																																																																											
	834.00	15.14	H	3.0	-1.2	10.87	38.5	-27.6																																																																																											
	Mid Ch																																																																																																		
	836.50	24.67	V	3.0	-1.2	20.42	38.5	-18.1																																																																																											
	836.50	14.70	H	3.0	-1.2	10.45	38.5	-28.1																																																																																											
	High Ch																																																																																																		
	839.00	24.66	V	3.0	-1.2	20.43	38.5	-18.1																																																																																											
839.00	14.97	H	3.0	-1.2	10.74	38.5	-27.8																																																																																												

NR Band 5 15MHz DFT-s QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/11/2021 Test Engineer: 25546 Configuration: EUT, Y-Position Location: Chamber 1 Mode: LTE_QPSK NR n5 Fundamentals, 15MHz Bandwidth Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>831.50</td><td>26.73</td><td>V</td><td>3.0</td><td>-1.3</td><td>22.44</td><td>38.5</td><td>-16.1</td><td></td></tr><tr><td>831.50</td><td>15.46</td><td>H</td><td>3.0</td><td>-1.3</td><td>11.17</td><td>38.5</td><td>-27.3</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>836.50</td><td>26.17</td><td>V</td><td>3.0</td><td>-1.2</td><td>21.92</td><td>38.5</td><td>-16.6</td><td></td></tr><tr><td>836.50</td><td>16.03</td><td>H</td><td>3.0</td><td>-1.2</td><td>11.78</td><td>38.5</td><td>-26.7</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>841.50</td><td>25.43</td><td>V</td><td>3.0</td><td>-1.2</td><td>21.22</td><td>38.5</td><td>-17.3</td><td></td></tr><tr><td>841.50</td><td>16.17</td><td>H</td><td>3.0</td><td>-1.2</td><td>11.96</td><td>38.5</td><td>-26.5</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									831.50	26.73	V	3.0	-1.3	22.44	38.5	-16.1		831.50	15.46	H	3.0	-1.3	11.17	38.5	-27.3		Mid Ch									836.50	26.17	V	3.0	-1.2	21.92	38.5	-16.6		836.50	16.03	H	3.0	-1.2	11.78	38.5	-26.7		High Ch									841.50	25.43	V	3.0	-1.2	21.22	38.5	-17.3		841.50	16.17	H	3.0	-1.2	11.96	38.5	-26.5	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	831.50	26.73	V	3.0	-1.3	22.44	38.5	-16.1																																																																																											
	831.50	15.46	H	3.0	-1.3	11.17	38.5	-27.3																																																																																											
	Mid Ch																																																																																																		
	836.50	26.17	V	3.0	-1.2	21.92	38.5	-16.6																																																																																											
	836.50	16.03	H	3.0	-1.2	11.78	38.5	-26.7																																																																																											
	High Ch																																																																																																		
	841.50	25.43	V	3.0	-1.2	21.22	38.5	-17.3																																																																																											
841.50	16.17	H	3.0	-1.2	11.96	38.5	-26.5																																																																																												
NR Band 5 15MHz DFT-s 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/11/2021 Test Engineer: 25546 Configuration: EUT, Y-Position Location: Chamber 1 Mode: LTE_16QAM NR n5 Fundamentals, 15MHz Bandwidth Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>831.50</td><td>25.61</td><td>V</td><td>3.0</td><td>-1.3</td><td>21.32</td><td>38.5</td><td>-17.2</td><td></td></tr><tr><td>831.50</td><td>14.55</td><td>H</td><td>3.0</td><td>-1.3</td><td>10.26</td><td>38.5</td><td>-28.2</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>836.50</td><td>24.97</td><td>V</td><td>3.0</td><td>-1.2</td><td>20.72</td><td>38.5</td><td>-17.8</td><td></td></tr><tr><td>836.50</td><td>14.77</td><td>H</td><td>3.0</td><td>-1.2</td><td>10.52</td><td>38.5</td><td>-28.0</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>841.50</td><td>24.63</td><td>V</td><td>3.0</td><td>-1.2</td><td>20.42</td><td>38.5</td><td>-18.1</td><td></td></tr><tr><td>841.50</td><td>15.19</td><td>H</td><td>3.0</td><td>-1.2</td><td>10.98</td><td>38.5</td><td>-27.5</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									831.50	25.61	V	3.0	-1.3	21.32	38.5	-17.2		831.50	14.55	H	3.0	-1.3	10.26	38.5	-28.2		Mid Ch									836.50	24.97	V	3.0	-1.2	20.72	38.5	-17.8		836.50	14.77	H	3.0	-1.2	10.52	38.5	-28.0		High Ch									841.50	24.63	V	3.0	-1.2	20.42	38.5	-18.1		841.50	15.19	H	3.0	-1.2	10.98	38.5	-27.5	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	831.50	25.61	V	3.0	-1.3	21.32	38.5	-17.2																																																																																											
	831.50	14.55	H	3.0	-1.3	10.26	38.5	-28.2																																																																																											
	Mid Ch																																																																																																		
	836.50	24.97	V	3.0	-1.2	20.72	38.5	-17.8																																																																																											
	836.50	14.77	H	3.0	-1.2	10.52	38.5	-28.0																																																																																											
	High Ch																																																																																																		
	841.50	24.63	V	3.0	-1.2	20.42	38.5	-18.1																																																																																											
841.50	15.19	H	3.0	-1.2	10.98	38.5	-27.5																																																																																												

NR Band 5 10MHz DFT-s QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/11/2021 Test Engineer: 25546 Configuration: EUT, Y-Position Location: Chamber 1 Mode: LTE_QPSK NR n5 Fundamentals, 10MHz Bandwidth Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>829.00</td><td>26.81</td><td>V</td><td>3.0</td><td>-1.3</td><td>22.50</td><td>38.5</td><td>-16.0</td><td></td></tr><tr><td>829.00</td><td>15.66</td><td>H</td><td>3.0</td><td>-1.3</td><td>11.35</td><td>38.5</td><td>-27.2</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>836.50</td><td>25.86</td><td>V</td><td>3.0</td><td>-1.2</td><td>21.61</td><td>38.5</td><td>-16.9</td><td></td></tr><tr><td>836.50</td><td>15.63</td><td>H</td><td>3.0</td><td>-1.2</td><td>11.38</td><td>38.5</td><td>-27.1</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>844.00</td><td>25.40</td><td>V</td><td>3.0</td><td>-1.2</td><td>21.20</td><td>38.5</td><td>-17.3</td><td></td></tr><tr><td>844.00</td><td>16.01</td><td>H</td><td>3.0</td><td>-1.2</td><td>11.81</td><td>38.5</td><td>-26.7</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									829.00	26.81	V	3.0	-1.3	22.50	38.5	-16.0		829.00	15.66	H	3.0	-1.3	11.35	38.5	-27.2		Mid Ch									836.50	25.86	V	3.0	-1.2	21.61	38.5	-16.9		836.50	15.63	H	3.0	-1.2	11.38	38.5	-27.1		High Ch									844.00	25.40	V	3.0	-1.2	21.20	38.5	-17.3		844.00	16.01	H	3.0	-1.2	11.81	38.5	-26.7	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	829.00	26.81	V	3.0	-1.3	22.50	38.5	-16.0																																																																																											
	829.00	15.66	H	3.0	-1.3	11.35	38.5	-27.2																																																																																											
	Mid Ch																																																																																																		
	836.50	25.86	V	3.0	-1.2	21.61	38.5	-16.9																																																																																											
	836.50	15.63	H	3.0	-1.2	11.38	38.5	-27.1																																																																																											
	High Ch																																																																																																		
	844.00	25.40	V	3.0	-1.2	21.20	38.5	-17.3																																																																																											
844.00	16.01	H	3.0	-1.2	11.81	38.5	-26.7																																																																																												
NR Band 5 10MHz DFT-s 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/11/2021 Test Engineer: 25546 Configuration: EUT, Y-Position Location: Chamber 1 Mode: LTE_16QAM NR n5 Fundamentals, 10MHz Bandwidth Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>829.00</td><td>25.76</td><td>V</td><td>3.0</td><td>-1.3</td><td>21.45</td><td>38.5</td><td>-17.0</td><td></td></tr><tr><td>829.00</td><td>14.56</td><td>H</td><td>3.0</td><td>-1.3</td><td>10.25</td><td>38.5</td><td>-28.3</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>836.50</td><td>25.03</td><td>V</td><td>3.0</td><td>-1.2</td><td>20.78</td><td>38.5</td><td>-17.7</td><td></td></tr><tr><td>836.50</td><td>14.34</td><td>H</td><td>3.0</td><td>-1.2</td><td>10.09</td><td>38.5</td><td>-28.4</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>844.00</td><td>24.23</td><td>V</td><td>3.0</td><td>-1.2</td><td>20.03</td><td>38.5</td><td>-18.5</td><td></td></tr><tr><td>844.00</td><td>15.34</td><td>H</td><td>3.0</td><td>-1.2</td><td>11.14</td><td>38.5</td><td>-27.4</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									829.00	25.76	V	3.0	-1.3	21.45	38.5	-17.0		829.00	14.56	H	3.0	-1.3	10.25	38.5	-28.3		Mid Ch									836.50	25.03	V	3.0	-1.2	20.78	38.5	-17.7		836.50	14.34	H	3.0	-1.2	10.09	38.5	-28.4		High Ch									844.00	24.23	V	3.0	-1.2	20.03	38.5	-18.5		844.00	15.34	H	3.0	-1.2	11.14	38.5	-27.4	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	829.00	25.76	V	3.0	-1.3	21.45	38.5	-17.0																																																																																											
	829.00	14.56	H	3.0	-1.3	10.25	38.5	-28.3																																																																																											
	Mid Ch																																																																																																		
	836.50	25.03	V	3.0	-1.2	20.78	38.5	-17.7																																																																																											
	836.50	14.34	H	3.0	-1.2	10.09	38.5	-28.4																																																																																											
	High Ch																																																																																																		
	844.00	24.23	V	3.0	-1.2	20.03	38.5	-18.5																																																																																											
844.00	15.34	H	3.0	-1.2	11.14	38.5	-27.4																																																																																												

NR Band 5 5MHz DFT-s QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/11/2021 Test Engineer: 25546 Configuration: EUT, Y-Position Location: Chamber 1 Mode: LTE_QPSK NR n5 Fundamentals, 5MHz Bandwidth Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>826.50</td><td>26.35</td><td>V</td><td>3.0</td><td>-1.3</td><td>22.03</td><td>38.5</td><td>-16.5</td><td></td></tr><tr><td>826.50</td><td>15.12</td><td>H</td><td>3.0</td><td>-1.3</td><td>10.79</td><td>38.5</td><td>-27.7</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>836.50</td><td>26.11</td><td>V</td><td>3.0</td><td>-1.2</td><td>21.86</td><td>38.5</td><td>-16.6</td><td></td></tr><tr><td>836.50</td><td>15.76</td><td>H</td><td>3.0</td><td>-1.2</td><td>11.51</td><td>38.5</td><td>-27.0</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>846.50</td><td>25.84</td><td>V</td><td>3.0</td><td>-1.1</td><td>21.66</td><td>38.5</td><td>-16.8</td><td></td></tr><tr><td>846.50</td><td>16.24</td><td>H</td><td>3.0</td><td>-1.1</td><td>12.06</td><td>38.5</td><td>-26.4</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									826.50	26.35	V	3.0	-1.3	22.03	38.5	-16.5		826.50	15.12	H	3.0	-1.3	10.79	38.5	-27.7		Mid Ch									836.50	26.11	V	3.0	-1.2	21.86	38.5	-16.6		836.50	15.76	H	3.0	-1.2	11.51	38.5	-27.0		High Ch									846.50	25.84	V	3.0	-1.1	21.66	38.5	-16.8		846.50	16.24	H	3.0	-1.1	12.06	38.5	-26.4	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	826.50	26.35	V	3.0	-1.3	22.03	38.5	-16.5																																																																																											
	826.50	15.12	H	3.0	-1.3	10.79	38.5	-27.7																																																																																											
	Mid Ch																																																																																																		
	836.50	26.11	V	3.0	-1.2	21.86	38.5	-16.6																																																																																											
	836.50	15.76	H	3.0	-1.2	11.51	38.5	-27.0																																																																																											
	High Ch																																																																																																		
	846.50	25.84	V	3.0	-1.1	21.66	38.5	-16.8																																																																																											
846.50	16.24	H	3.0	-1.1	12.06	38.5	-26.4																																																																																												
NR Band 5 5MHz DFT-s 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/11/2021 Test Engineer: 25546 Configuration: EUT, Y-Position Location: Chamber 1 Mode: LTE_16QAM NR n5 Fundamentals, 5MHz Bandwidth Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBd)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>826.50</td><td>26.20</td><td>V</td><td>3.0</td><td>-1.3</td><td>21.88</td><td>38.5</td><td>-16.6</td><td></td></tr><tr><td>826.50</td><td>14.63</td><td>H</td><td>3.0</td><td>-1.3</td><td>10.30</td><td>38.5</td><td>-28.2</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>836.50</td><td>24.72</td><td>V</td><td>3.0</td><td>-1.2</td><td>20.47</td><td>38.5</td><td>-18.0</td><td></td></tr><tr><td>836.50</td><td>14.78</td><td>H</td><td>3.0</td><td>-1.2</td><td>10.53</td><td>38.5</td><td>-28.0</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>846.50</td><td>24.74</td><td>V</td><td>3.0</td><td>-1.1</td><td>20.56</td><td>38.5</td><td>-17.9</td><td></td></tr><tr><td>846.50</td><td>15.35</td><td>H</td><td>3.0</td><td>-1.1</td><td>11.17</td><td>38.5</td><td>-27.3</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									826.50	26.20	V	3.0	-1.3	21.88	38.5	-16.6		826.50	14.63	H	3.0	-1.3	10.30	38.5	-28.2		Mid Ch									836.50	24.72	V	3.0	-1.2	20.47	38.5	-18.0		836.50	14.78	H	3.0	-1.2	10.53	38.5	-28.0		High Ch									846.50	24.74	V	3.0	-1.1	20.56	38.5	-17.9		846.50	15.35	H	3.0	-1.1	11.17	38.5	-27.3	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	826.50	26.20	V	3.0	-1.3	21.88	38.5	-16.6																																																																																											
	826.50	14.63	H	3.0	-1.3	10.30	38.5	-28.2																																																																																											
	Mid Ch																																																																																																		
	836.50	24.72	V	3.0	-1.2	20.47	38.5	-18.0																																																																																											
	836.50	14.78	H	3.0	-1.2	10.53	38.5	-28.0																																																																																											
	High Ch																																																																																																		
	846.50	24.74	V	3.0	-1.1	20.56	38.5	-17.9																																																																																											
846.50	15.35	H	3.0	-1.1	11.17	38.5	-27.3																																																																																												

NR Band 66

NR Band 66 20MHz DFT-s QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/9/2021 Test Engineer: 19568 Configuration: EUT, X-Position Location: Chamber 1 Mode: LTE_QPSK NR n66 Fundamentals, 20MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1720.00</td><td>13.90</td><td>V</td><td>4.3</td><td>9.6</td><td>19.19</td><td>30.0</td><td>-10.8</td><td></td></tr><tr><td>1720.00</td><td>15.59</td><td>H</td><td>4.3</td><td>9.6</td><td>20.88</td><td>30.0</td><td>-9.1</td><td></td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1745.00</td><td>15.35</td><td>V</td><td>4.3</td><td>9.7</td><td>20.70</td><td>30.0</td><td>-9.3</td><td></td></tr><tr><td>1745.00</td><td>14.37</td><td>H</td><td>4.3</td><td>9.7</td><td>19.72</td><td>30.0</td><td>-10.3</td><td></td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1770.00</td><td>13.12</td><td>V</td><td>4.4</td><td>9.7</td><td>18.45</td><td>30.0</td><td>-11.5</td><td></td></tr><tr><td>1770.00</td><td>13.95</td><td>H</td><td>4.4</td><td>9.7</td><td>19.29</td><td>30.0</td><td>-10.7</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1720.00	13.90	V	4.3	9.6	19.19	30.0	-10.8		1720.00	15.59	H	4.3	9.6	20.88	30.0	-9.1		Mid Ch									1745.00	15.35	V	4.3	9.7	20.70	30.0	-9.3		1745.00	14.37	H	4.3	9.7	19.72	30.0	-10.3		High Ch									1770.00	13.12	V	4.4	9.7	18.45	30.0	-11.5		1770.00	13.95	H	4.4	9.7	19.29	30.0	-10.7	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	1720.00	13.90	V	4.3	9.6	19.19	30.0	-10.8																																																																																											
	1720.00	15.59	H	4.3	9.6	20.88	30.0	-9.1																																																																																											
	Mid Ch																																																																																																		
	1745.00	15.35	V	4.3	9.7	20.70	30.0	-9.3																																																																																											
	1745.00	14.37	H	4.3	9.7	19.72	30.0	-10.3																																																																																											
	High Ch																																																																																																		
	1770.00	13.12	V	4.4	9.7	18.45	30.0	-11.5																																																																																											
1770.00	13.95	H	4.4	9.7	19.29	30.0	-10.7																																																																																												
NR Band 66 20MHz DFT-s 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/9/2021 Test Engineer: 19568 Configuration: EUT, X-Position Location: Chamber 1 Mode: LTE_16QAM NR n66 Fundamentals, 20MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1720.00</td><td>13.83</td><td>V</td><td>4.3</td><td>9.6</td><td>19.12</td><td>30.0</td><td>-10.9</td><td></td></tr><tr><td>1720.00</td><td>15.46</td><td>H</td><td>4.3</td><td>9.6</td><td>20.75</td><td>30.0</td><td>-9.2</td><td></td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1745.00</td><td>15.13</td><td>V</td><td>4.3</td><td>9.7</td><td>20.48</td><td>30.0</td><td>-9.5</td><td></td></tr><tr><td>1745.00</td><td>14.31</td><td>H</td><td>4.3</td><td>9.7</td><td>19.66</td><td>30.0</td><td>-10.3</td><td></td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1770.00</td><td>12.53</td><td>V</td><td>4.4</td><td>9.7</td><td>17.86</td><td>30.0</td><td>-12.1</td><td></td></tr><tr><td>1770.00</td><td>13.72</td><td>H</td><td>4.4</td><td>9.7</td><td>19.06</td><td>30.0</td><td>-10.9</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1720.00	13.83	V	4.3	9.6	19.12	30.0	-10.9		1720.00	15.46	H	4.3	9.6	20.75	30.0	-9.2		Mid Ch									1745.00	15.13	V	4.3	9.7	20.48	30.0	-9.5		1745.00	14.31	H	4.3	9.7	19.66	30.0	-10.3		High Ch									1770.00	12.53	V	4.4	9.7	17.86	30.0	-12.1		1770.00	13.72	H	4.4	9.7	19.06	30.0	-10.9	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	1720.00	13.83	V	4.3	9.6	19.12	30.0	-10.9																																																																																											
	1720.00	15.46	H	4.3	9.6	20.75	30.0	-9.2																																																																																											
	Mid Ch																																																																																																		
	1745.00	15.13	V	4.3	9.7	20.48	30.0	-9.5																																																																																											
	1745.00	14.31	H	4.3	9.7	19.66	30.0	-10.3																																																																																											
	High Ch																																																																																																		
	1770.00	12.53	V	4.4	9.7	17.86	30.0	-12.1																																																																																											
1770.00	13.72	H	4.4	9.7	19.06	30.0	-10.9																																																																																												

NR Band 66 15MHz DFT-s QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/9/2021 Test Engineer: 19568 Configuration: EUT, X-Position Location: Chamber 1 Mode: LTE_QPSK NR n66 Fundamentals, 15MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>1717.50</td><td>12.71</td><td>V</td><td>4.3</td><td>9.6</td><td>18.00</td><td>30.0</td><td>-12.0</td><td></td></tr><tr><td>1717.50</td><td>15.22</td><td>H</td><td>4.3</td><td>9.6</td><td>20.51</td><td>30.0</td><td>-9.5</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>1745.00</td><td>14.65</td><td>V</td><td>4.3</td><td>9.7</td><td>20.00</td><td>30.0</td><td>-10.0</td><td></td></tr><tr><td>1745.00</td><td>14.83</td><td>H</td><td>4.3</td><td>9.7</td><td>20.18</td><td>30.0</td><td>-9.8</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>1772.50</td><td>12.17</td><td>V</td><td>4.4</td><td>9.7</td><td>17.50</td><td>30.0</td><td>-12.5</td><td></td></tr><tr><td>1772.50</td><td>14.84</td><td>H</td><td>4.4</td><td>9.7</td><td>20.17</td><td>30.0</td><td>-9.8</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1717.50	12.71	V	4.3	9.6	18.00	30.0	-12.0		1717.50	15.22	H	4.3	9.6	20.51	30.0	-9.5		Mid Ch									1745.00	14.65	V	4.3	9.7	20.00	30.0	-10.0		1745.00	14.83	H	4.3	9.7	20.18	30.0	-9.8		High Ch									1772.50	12.17	V	4.4	9.7	17.50	30.0	-12.5		1772.50	14.84	H	4.4	9.7	20.17	30.0	-9.8	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	1717.50	12.71	V	4.3	9.6	18.00	30.0	-12.0																																																																																											
	1717.50	15.22	H	4.3	9.6	20.51	30.0	-9.5																																																																																											
	Mid Ch																																																																																																		
	1745.00	14.65	V	4.3	9.7	20.00	30.0	-10.0																																																																																											
	1745.00	14.83	H	4.3	9.7	20.18	30.0	-9.8																																																																																											
	High Ch																																																																																																		
	1772.50	12.17	V	4.4	9.7	17.50	30.0	-12.5																																																																																											
1772.50	14.84	H	4.4	9.7	20.17	30.0	-9.8																																																																																												
NR Band 66 15MHz DFT-s 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/9/2021 Test Engineer: 19568 Configuration: EUT, X-Position Location: Chamber 1 Mode: LTE_16QAM NR n66 Fundamentals, 15MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>1717.50</td><td>12.59</td><td>V</td><td>4.3</td><td>9.6</td><td>17.88</td><td>30.0</td><td>-12.1</td><td></td></tr><tr><td>1717.50</td><td>15.20</td><td>H</td><td>4.3</td><td>9.6</td><td>20.49</td><td>30.0</td><td>-9.5</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>1745.00</td><td>14.90</td><td>V</td><td>4.3</td><td>9.7</td><td>20.25</td><td>30.0</td><td>-9.8</td><td></td></tr><tr><td>1745.00</td><td>14.66</td><td>H</td><td>4.3</td><td>9.7</td><td>20.01</td><td>30.0</td><td>-10.0</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>1772.50</td><td>11.74</td><td>V</td><td>4.4</td><td>9.7</td><td>17.07</td><td>30.0</td><td>-12.9</td><td></td></tr><tr><td>1772.50</td><td>14.74</td><td>H</td><td>4.4</td><td>9.7</td><td>20.07</td><td>30.0</td><td>-9.9</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1717.50	12.59	V	4.3	9.6	17.88	30.0	-12.1		1717.50	15.20	H	4.3	9.6	20.49	30.0	-9.5		Mid Ch									1745.00	14.90	V	4.3	9.7	20.25	30.0	-9.8		1745.00	14.66	H	4.3	9.7	20.01	30.0	-10.0		High Ch									1772.50	11.74	V	4.4	9.7	17.07	30.0	-12.9		1772.50	14.74	H	4.4	9.7	20.07	30.0	-9.9	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	1717.50	12.59	V	4.3	9.6	17.88	30.0	-12.1																																																																																											
	1717.50	15.20	H	4.3	9.6	20.49	30.0	-9.5																																																																																											
	Mid Ch																																																																																																		
	1745.00	14.90	V	4.3	9.7	20.25	30.0	-9.8																																																																																											
	1745.00	14.66	H	4.3	9.7	20.01	30.0	-10.0																																																																																											
	High Ch																																																																																																		
	1772.50	11.74	V	4.4	9.7	17.07	30.0	-12.9																																																																																											
1772.50	14.74	H	4.4	9.7	20.07	30.0	-9.9																																																																																												

NR Band 66 10MHz DFT-s QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/9/2021 Test Engineer: 19568 Configuration: EUT, X-Position Location: Chamber 1 Mode: LTE_QPSK NR n66 Fundamentals, 10MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1715.00</td><td>13.10</td><td>V</td><td>4.3</td><td>9.6</td><td>18.38</td><td>30.0</td><td>-11.6</td></tr><tr><td>1715.00</td><td>14.52</td><td>H</td><td>4.3</td><td>9.6</td><td>19.80</td><td>30.0</td><td>-10.2</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1745.00</td><td>15.17</td><td>V</td><td>4.3</td><td>9.7</td><td>20.52</td><td>30.0</td><td>-9.5</td></tr><tr><td>1745.00</td><td>15.14</td><td>H</td><td>4.3</td><td>9.7</td><td>20.49</td><td>30.0</td><td>-9.5</td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1775.00</td><td>13.65</td><td>V</td><td>4.4</td><td>9.7</td><td>18.98</td><td>30.0</td><td>-11.0</td></tr><tr><td>1775.00</td><td>14.58</td><td>H</td><td>4.4</td><td>9.7</td><td>19.91</td><td>30.0</td><td>-10.1</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								1715.00	13.10	V	4.3	9.6	18.38	30.0	-11.6	1715.00	14.52	H	4.3	9.6	19.80	30.0	-10.2	Mid Ch								1745.00	15.17	V	4.3	9.7	20.52	30.0	-9.5	1745.00	15.14	H	4.3	9.7	20.49	30.0	-9.5	High Ch								1775.00	13.65	V	4.4	9.7	18.98	30.0	-11.0	1775.00	14.58	H	4.4	9.7	19.91	30.0	-10.1
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																	
	Low Ch																																																																																									
	1715.00	13.10	V	4.3	9.6	18.38	30.0	-11.6																																																																																		
	1715.00	14.52	H	4.3	9.6	19.80	30.0	-10.2																																																																																		
	Mid Ch																																																																																									
	1745.00	15.17	V	4.3	9.7	20.52	30.0	-9.5																																																																																		
	1745.00	15.14	H	4.3	9.7	20.49	30.0	-9.5																																																																																		
	High Ch																																																																																									
	1775.00	13.65	V	4.4	9.7	18.98	30.0	-11.0																																																																																		
1775.00	14.58	H	4.4	9.7	19.91	30.0	-10.1																																																																																			
NR Band 66 10MHz DFT-s 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/9/2021 Test Engineer: 19568 Configuration: EUT / X-Position Location: Chamber 1 Mode: LTE_16QAM NR n66 Fundamentals, 10MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1715.00</td><td>12.90</td><td>V</td><td>4.3</td><td>9.6</td><td>18.18</td><td>30.0</td><td>-11.8</td></tr><tr><td>1715.00</td><td>14.33</td><td>H</td><td>4.3</td><td>9.6</td><td>19.61</td><td>30.0</td><td>-10.4</td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1745.00</td><td>15.06</td><td>V</td><td>4.3</td><td>9.7</td><td>20.41</td><td>30.0</td><td>-9.6</td></tr><tr><td>1745.00</td><td>14.93</td><td>H</td><td>4.3</td><td>9.7</td><td>20.28</td><td>30.0</td><td>-9.7</td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1775.00</td><td>13.47</td><td>V</td><td>4.4</td><td>9.7</td><td>18.80</td><td>30.0</td><td>-11.2</td></tr><tr><td>1775.00</td><td>14.42</td><td>H</td><td>4.4</td><td>9.7</td><td>19.75</td><td>30.0</td><td>-10.3</td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch								1715.00	12.90	V	4.3	9.6	18.18	30.0	-11.8	1715.00	14.33	H	4.3	9.6	19.61	30.0	-10.4	Mid Ch								1745.00	15.06	V	4.3	9.7	20.41	30.0	-9.6	1745.00	14.93	H	4.3	9.7	20.28	30.0	-9.7	High Ch								1775.00	13.47	V	4.4	9.7	18.80	30.0	-11.2	1775.00	14.42	H	4.4	9.7	19.75	30.0	-10.3
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																	
	Low Ch																																																																																									
	1715.00	12.90	V	4.3	9.6	18.18	30.0	-11.8																																																																																		
	1715.00	14.33	H	4.3	9.6	19.61	30.0	-10.4																																																																																		
	Mid Ch																																																																																									
	1745.00	15.06	V	4.3	9.7	20.41	30.0	-9.6																																																																																		
	1745.00	14.93	H	4.3	9.7	20.28	30.0	-9.7																																																																																		
	High Ch																																																																																									
	1775.00	13.47	V	4.4	9.7	18.80	30.0	-11.2																																																																																		
1775.00	14.42	H	4.4	9.7	19.75	30.0	-10.3																																																																																			

NR Band 66 5MHz DFT-s QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/9/2021 Test Engineer: 19568 Configuration: EUT, X-Position Location: Chamber 1 Mode: LTE_QPSK NR n66 Fundamentals, 5MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>1712.50</td><td>13.72</td><td>V</td><td>4.3</td><td>9.6</td><td>19.00</td><td>30.0</td><td>-11.0</td><td></td></tr><tr><td>1712.50</td><td>15.24</td><td>H</td><td>4.3</td><td>9.6</td><td>20.52</td><td>30.0</td><td>-9.5</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>1745.00</td><td>15.49</td><td>V</td><td>4.3</td><td>9.7</td><td>20.84</td><td>30.0</td><td>-9.2</td><td></td></tr><tr><td>1745.00</td><td>15.25</td><td>H</td><td>4.3</td><td>9.7</td><td>20.60</td><td>30.0</td><td>-9.4</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>1777.50</td><td>14.11</td><td>V</td><td>4.4</td><td>9.7</td><td>19.44</td><td>30.0</td><td>-10.6</td><td></td></tr><tr><td>1777.50</td><td>15.17</td><td>H</td><td>4.4</td><td>9.7</td><td>20.50</td><td>30.0</td><td>-9.5</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1712.50	13.72	V	4.3	9.6	19.00	30.0	-11.0		1712.50	15.24	H	4.3	9.6	20.52	30.0	-9.5		Mid Ch									1745.00	15.49	V	4.3	9.7	20.84	30.0	-9.2		1745.00	15.25	H	4.3	9.7	20.60	30.0	-9.4		High Ch									1777.50	14.11	V	4.4	9.7	19.44	30.0	-10.6		1777.50	15.17	H	4.4	9.7	20.50	30.0	-9.5	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	1712.50	13.72	V	4.3	9.6	19.00	30.0	-11.0																																																																																											
	1712.50	15.24	H	4.3	9.6	20.52	30.0	-9.5																																																																																											
	Mid Ch																																																																																																		
	1745.00	15.49	V	4.3	9.7	20.84	30.0	-9.2																																																																																											
	1745.00	15.25	H	4.3	9.7	20.60	30.0	-9.4																																																																																											
	High Ch																																																																																																		
	1777.50	14.11	V	4.4	9.7	19.44	30.0	-10.6																																																																																											
1777.50	15.17	H	4.4	9.7	20.50	30.0	-9.5																																																																																												
NR Band 66 5MHz DFT-s 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/9/2021 Test Engineer: 19568 Configuration: EUT, X-Position Location: Chamber 1 Mode: LTE_16QAM NR n66 Fundamentals, 5MHz Bandwidth Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable <table><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr><tr><td colspan="9">Low Ch</td></tr><tr><td>1712.50</td><td>13.35</td><td>V</td><td>4.3</td><td>9.6</td><td>18.63</td><td>30.0</td><td>-11.4</td><td></td></tr><tr><td>1712.50</td><td>14.55</td><td>H</td><td>4.3</td><td>9.6</td><td>19.83</td><td>30.0</td><td>-10.2</td><td></td></tr><tr><td colspan="9">Mid Ch</td></tr><tr><td>1745.00</td><td>15.26</td><td>V</td><td>4.3</td><td>9.7</td><td>20.61</td><td>30.0</td><td>-9.4</td><td></td></tr><tr><td>1745.00</td><td>15.08</td><td>H</td><td>4.3</td><td>9.7</td><td>20.43</td><td>30.0</td><td>-9.6</td><td></td></tr><tr><td colspan="9">High Ch</td></tr><tr><td>1777.50</td><td>13.62</td><td>V</td><td>4.4</td><td>9.7</td><td>18.95</td><td>30.0</td><td>-11.0</td><td></td></tr><tr><td>1777.50</td><td>14.81</td><td>H</td><td>4.4</td><td>9.7</td><td>20.14</td><td>30.0</td><td>-9.9</td><td></td></tr></table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1712.50	13.35	V	4.3	9.6	18.63	30.0	-11.4		1712.50	14.55	H	4.3	9.6	19.83	30.0	-10.2		Mid Ch									1745.00	15.26	V	4.3	9.7	20.61	30.0	-9.4		1745.00	15.08	H	4.3	9.7	20.43	30.0	-9.6		High Ch									1777.50	13.62	V	4.4	9.7	18.95	30.0	-11.0		1777.50	14.81	H	4.4	9.7	20.14	30.0	-9.9	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
	Low Ch																																																																																																		
	1712.50	13.35	V	4.3	9.6	18.63	30.0	-11.4																																																																																											
	1712.50	14.55	H	4.3	9.6	19.83	30.0	-10.2																																																																																											
	Mid Ch																																																																																																		
	1745.00	15.26	V	4.3	9.7	20.61	30.0	-9.4																																																																																											
	1745.00	15.08	H	4.3	9.7	20.43	30.0	-9.6																																																																																											
	High Ch																																																																																																		
	1777.50	13.62	V	4.4	9.7	18.95	30.0	-11.0																																																																																											
1777.50	14.81	H	4.4	9.7	20.14	30.0	-9.9																																																																																												

9.6. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238, §27.53 and §90.691

LIMIT

Part 22.917(a) & Part 24.238(a) & Part 27.53(h) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

Part 27.53:

(c)(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB.

(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB.

(h) The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

(m) (4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Part 90.691(a):

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz. (NOTE : Use 100kHz reference bandwidth)

(b) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

TEST PROCEDURE

ANSI / TIA / EIA 603 E Clause 2.2.12; ESU40 setting reference to 971168 D01 v03r01

For peak power measurement with a ESU40:

- a) Set the RBW = 100 KHz for emission below 1GHz and 1MHz for emissions above 1GHz
- b) Set VBW $\geq 3 \times$ RBW;
- c) Set span ≥ 1.5 times the OBW;
- d) Sweep time = auto couple;
- e) Detector = rms;
- f) Ensure that the number of measurement points $\geq$ span/RBW;
- g) Trace mode = average(WCDMA, LTE FDD, NR), Maxhold(GSM, LTE TDD);

NOTE

5G NR: All Waveforms (CP-OFDM vs DFT-s OFDM) and modulations ($\pi/2$ BPSK, QPSK QPSK, 16QAM, 64QAM, 256QAM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

RESULTS

See the following pages.

NOTE : Please refer to section 5.4 for bandwidth and RB setting about LTE,NR bands.

9.6.1. SPURIOUS RADIATION PLOTS

GSM850

		UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement							
		Company: Samsung Project #: 4790101660 Date: 11/10/2021 Test Engineer: 20882 Configuration: EUT / AC Adapter, Y-Position Location: Chamber 2 Mode: GPRS 850 MHz Harmonics Test Voltage: AC 120 V, 60 Hz							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 824.2MHz									
1648.40	-7.1	V	3.0	40.9	1.0	-47.0	-13.0	-34.0	
2472.60	-7.1	V	3.0	41.5	1.0	-47.7	-13.0	-34.7	
3296.80	-9.0	V	3.0	42.3	1.0	-50.3	-13.0	-37.3	
1648.40	-4.8	H	3.0	40.9	1.0	-44.8	-13.0	-31.8	
2472.60	-6.8	H	3.0	41.5	1.0	-47.3	-13.0	-34.3	
3296.80	-8.7	H	3.0	42.3	1.0	-50.0	-13.0	-37.0	
Mid Ch, 836.6MHz									
1673.20	-11.8	V	3.0	40.9	1.0	-51.7	-13.0	-38.7	
2509.80	-6.2	V	3.0	41.6	1.0	-46.8	-13.0	-33.8	
3346.40	-8.7	V	3.0	42.3	1.0	-50.0	-13.0	-37.0	
1673.20	-8.5	H	3.0	40.9	1.0	-48.4	-13.0	-35.4	
2509.80	-7.6	H	3.0	41.6	1.0	-48.2	-13.0	-35.2	
3346.40	-8.9	H	3.0	42.3	1.0	-50.2	-13.0	-37.2	
High Ch, 848.8MHz									
1697.60	-11.7	V	3.0	40.9	1.0	-51.6	-13.0	-38.6	
2546.40	-8.0	V	3.0	41.6	1.0	-48.7	-13.0	-35.7	
3395.20	-8.7	V	3.0	42.3	1.0	-50.0	-13.0	-37.0	
1697.60	-13.9	H	3.0	40.9	1.0	-53.8	-13.0	-40.8	
2546.40	-1.8	H	3.0	41.6	1.0	-42.5	-13.0	-29.5	
3395.20	-8.8	H	3.0	42.3	1.0	-50.1	-13.0	-37.1	

		UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement							
		Company: Samsung Project #: 4790101660 Date: 11/10/2021 Test Engineer: 20882 Configuration: EUT / AC Adapter, Y-Position Location: Chamber 2 Mode: EGPRS 850 MHz Harmonics Test Voltage: AC 120 V, 60 Hz							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 824.2MHz									
1648.40	-14.8	V	3.0	40.9	1.0	-54.7	-13.0	-41.7	
2472.60	-12.1	V	3.0	41.5	1.0	-52.7	-13.0	-39.7	
3296.80	-9.4	V	3.0	42.3	1.0	-50.7	-13.0	-37.7	
1648.40	-15.8	H	3.0	40.9	1.0	-55.7	-13.0	-42.7	
2472.60	-12.2	H	3.0	41.5	1.0	-52.7	-13.0	-39.7	
3296.80	-9.5	H	3.0	42.3	1.0	-50.8	-13.0	-37.8	
Mid Ch, 836.6MHz									
1673.20	-14.9	V	3.0	40.9	1.0	-54.8	-13.0	-41.8	
2509.80	-12.0	V	3.0	41.6	1.0	-52.6	-13.0	-39.6	
3346.40	-8.8	V	3.0	42.3	1.0	-50.1	-13.0	-37.1	
1673.20	-14.6	H	3.0	40.9	1.0	-54.6	-13.0	-41.6	
2509.80	-11.8	H	3.0	41.6	1.0	-52.4	-13.0	-39.4	
3346.40	-9.1	H	3.0	42.3	1.0	-50.4	-13.0	-37.4	
High Ch, 848.8MHz									
1697.60	-14.8	V	3.0	40.9	1.0	-54.7	-13.0	-41.7	
2546.40	-12.0	V	3.0	41.6	1.0	-52.7	-13.0	-39.7	
3395.20	-8.7	V	3.0	42.3	1.0	-50.0	-13.0	-37.0	
1697.60	-15.8	H	3.0	40.9	1.0	-55.7	-13.0	-42.7	
2546.40	-11.3	H	3.0	41.6	1.0	-52.0	-13.0	-39.0	
3395.20	-8.9	H	3.0	42.3	1.0	-50.2	-13.0	-37.2	

GSM1900

	UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
GSM1900 GPRS	Company: Samsung									
	Project #: 4790101660									
	Date: 11/11/2021									
	Test Engineer: 22943									
	Configuration: EUT / AC Adapter, Y-Position									
	Location: Chamber 2									
	Mode: GPRS 1900 MHz Harmonics									
	Test Votage: AC 120 V, 60 Hz									
	Low Ch, 1850.2MHz									
	3700.40	-10.4	V	3.0	42.3	1.0	-51.8	-13.0	-38.8	
	5550.60	-7.2	V	3.0	43.1	1.0	-49.4	-13.0	-36.4	
	7400.80	-4.2	V	3.0	42.7	1.0	-46.0	-13.0	-33.0	
	3700.40	-10.3	H	3.0	42.3	1.0	-51.6	-13.0	-38.6	
	5550.60	-7.1	H	3.0	43.1	1.0	-49.3	-13.0	-36.3	
	7400.80	-3.5	H	3.0	42.7	1.0	-45.3	-13.0	-32.3	
	Mid Ch, 1880MHz									
	3760.00	-10.2	V	3.0	42.3	1.0	-51.6	-13.0	-38.6	
	5640.00	-6.8	V	3.0	43.2	1.0	-49.0	-13.0	-36.0	
	7520.00	-2.9	V	3.0	42.7	1.0	-44.6	-13.0	-31.6	
	3760.00	-10.1	H	3.0	42.3	1.0	-51.4	-13.0	-38.4	
	5640.00	-6.1	H	3.0	43.2	1.0	-48.2	-13.0	-35.2	
	7520.00	-2.4	H	3.0	42.7	1.0	-44.1	-13.0	-31.1	
	High Ch, 1909.8MHz									
	3819.60	-10.2	V	3.0	42.3	1.0	-51.6	-13.0	-38.6	
	5729.40	-7.1	V	3.0	43.2	1.0	-49.3	-13.0	-36.3	
	7639.20	-3.0	V	3.0	42.6	1.0	-44.6	-13.0	-31.6	
	3819.60	-10.1	H	3.0	42.3	1.0	-51.5	-13.0	-38.5	
	5729.40	-7.4	H	3.0	43.2	1.0	-49.6	-13.0	-36.6	
	7639.20	-2.3	H	3.0	42.6	1.0	-43.9	-13.0	-30.9	
GSM1900 EGPRS	Company: Samsung									
	Project #: 4790101660									
	Date: 11/11/2021									
	Test Engineer: 22943									
	Configuration: EUT / AC Adapter, Y-Position									
	Location: Chamber 2									
	Mode: EGPRS 1900 MHz Harmonics									
	Test Votage: AC 120 V, 60 Hz									
	Low Ch, 1850.2MHz									
	3700.40	-10.6	V	3.0	42.3	1.0	-51.9	-13.0	-38.9	
	5550.60	-7.2	V	3.0	43.1	1.0	-49.4	-13.0	-36.4	
	7400.80	-4.9	V	3.0	42.7	1.0	-46.6	-13.0	-33.6	
	3700.40	-10.4	H	3.0	42.3	1.0	-51.7	-13.0	-38.7	
	5550.60	-7.1	H	3.0	43.1	1.0	-49.2	-13.0	-36.2	
	7400.80	-4.6	H	3.0	42.7	1.0	-46.4	-13.0	-33.4	
	Mid Ch, 1880MHz									
	3760.00	-10.3	V	3.0	42.3	1.0	-51.6	-13.0	-38.6	
	5640.00	-6.9	V	3.0	43.2	1.0	-49.1	-13.0	-36.1	
	7520.00	-3.9	V	3.0	42.7	1.0	-45.6	-13.0	-32.6	
	3760.00	-9.9	H	3.0	42.3	1.0	-51.3	-13.0	-38.3	
	5640.00	-6.8	H	3.0	43.2	1.0	-49.0	-13.0	-36.0	
	7520.00	-3.9	H	3.0	42.7	1.0	-45.6	-13.0	-32.6	
	High Ch, 1909.8MHz									
	3819.60	-10.1	V	3.0	42.3	1.0	-51.4	-13.0	-38.4	
	5729.40	-7.2	V	3.0	43.2	1.0	-49.4	-13.0	-36.4	
	7639.20	-3.5	V	3.0	42.6	1.0	-45.1	-13.0	-32.1	
	3819.60	-10.1	H	3.0	42.3	1.0	-51.4	-13.0	-38.4	
	5729.40	-7.2	H	3.0	43.2	1.0	-49.4	-13.0	-36.4	
	7639.20	-2.8	H	3.0	42.6	1.0	-44.4	-13.0	-31.4	

WCDMA Band 5

	UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band 5 REL99	Company: Samsung									
	Project #: 4790101660									
	Date: 11/10/2021									
	Test Engineer: 20882									
	Configuration: EUT / AC Adapter, Y-Position									
	Location: Chamber 2									
	Mode: Rel99 Band 5 Harmonics									
	Test Votage: AC 120 V, 60 Hz									
	Low Ch, 826.4MHz									
	1652.80	-15.8	V	3.0	40.9	1.0	-55.8	-13.0	-42.8	
	2479.20	-12.8	V	3.0	41.6	1.0	-53.4	-13.0	-40.4	
	3305.60	-10.1	V	3.0	42.3	1.0	-51.4	-13.0	-38.4	
	1652.80	-16.6	H	3.0	40.9	1.0	-56.5	-13.0	-43.5	
	2479.20	-13.3	H	3.0	41.6	1.0	-53.9	-13.0	-40.9	
	3305.60	-10.1	H	3.0	42.3	1.0	-51.4	-13.0	-38.4	
	Mid Ch, 836.6MHz									
	1673.20	-15.9	V	3.0	40.9	1.0	-55.9	-13.0	-42.9	
	2509.80	-12.9	V	3.0	41.6	1.0	-53.5	-13.0	-40.5	
	3346.40	-9.7	V	3.0	42.3	1.0	-51.0	-13.0	-38.0	
	1673.20	-16.3	H	3.0	40.9	1.0	-56.2	-13.0	-43.2	
	2509.80	-13.2	H	3.0	41.6	1.0	-53.8	-13.0	-40.8	
	3346.40	-9.7	H	3.0	42.3	1.0	-51.0	-13.0	-38.0	
	High Ch, 846.6MHz									
	1693.20	-15.5	V	3.0	40.9	1.0	-55.4	-13.0	-42.4	
	2539.80	-12.3	V	3.0	41.6	1.0	-53.0	-13.0	-40.0	
	3386.40	-9.8	V	3.0	42.3	1.0	-51.1	-13.0	-38.1	
	1693.20	-16.3	H	3.0	40.9	1.0	-56.2	-13.0	-43.2	
	2539.80	-12.9	H	3.0	41.6	1.0	-53.5	-13.0	-40.5	
	3386.40	-9.6	H	3.0	42.3	1.0	-50.9	-13.0	-37.9	
Band 5 HSDPA	Company: Samsung									
	Project #: 4790101660									
	Date: 11/10/2021									
	Test Engineer: 20882									
	Configuration: EUT / AC Adapter, Y-Position									
	Location: Chamber 2									
	Mode: HSDPA Band 5 Harmonics									
	Test Votage: AC 120 V, 60 Hz									
	Low Ch, 826.4MHz									
	1652.80	-16.0	V	3.0	40.9	1.0	-55.9	-13.0	-42.9	
	2479.20	-12.8	V	3.0	41.6	1.0	-53.4	-13.0	-40.4	
	3305.60	-9.9	V	3.0	42.3	1.0	-51.2	-13.0	-38.2	
	1652.80	-16.5	H	3.0	40.9	1.0	-56.4	-13.0	-43.4	
	2479.20	-12.3	H	3.0	41.6	1.0	-52.8	-13.0	-39.8	
	3305.60	-9.9	H	3.0	42.3	1.0	-51.2	-13.0	-38.2	
	Mid Ch, 836.6MHz									
	1673.20	-15.7	V	3.0	40.9	1.0	-55.6	-13.0	-42.6	
	2509.80	-12.8	V	3.0	41.6	1.0	-53.4	-13.0	-40.4	
	3346.40	-9.5	V	3.0	42.3	1.0	-50.8	-13.0	-37.8	
	1673.20	-16.5	H	3.0	40.9	1.0	-56.4	-13.0	-43.4	
	2509.80	-13.3	H	3.0	41.6	1.0	-53.9	-13.0	-40.9	
	3346.40	-9.6	H	3.0	42.3	1.0	-50.9	-13.0	-37.9	
	High Ch, 846.6MHz									
	1693.20	-15.7	V	3.0	40.9	1.0	-55.6	-13.0	-42.6	
	2539.80	-12.5	V	3.0	41.6	1.0	-53.2	-13.0	-40.2	
	3386.40	-9.7	V	3.0	42.3	1.0	-51.0	-13.0	-38.0	
	1693.20	-16.2	H	3.0	40.9	1.0	-56.1	-13.0	-43.1	
	2539.80	-13.2	H	3.0	41.6	1.0	-53.8	-13.0	-40.8	
	3386.40	-9.5	H	3.0	42.3	1.0	-50.8	-13.0	-37.8	

WCDMA Band 4

Band 4 REL99	UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/12/2021 Test Engineer: 22943 Configuration: EUT / AC Adapter, Z-Position Location: Chamber 2 Mode: Rel99 Band 4 Harmonics Test Votage: AC 120 V, 60 Hz									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 1712.4MHz									
	3424.80	-9.2	V	3.0	42.3	1.0	-50.5	-13.0	-37.5	
	5137.20	-9.2	V	3.0	43.1	1.0	-51.2	-13.0	-38.2	
	6849.60	-6.3	V	3.0	43.0	1.0	-48.2	-13.0	-35.2	
	3424.80	-9.2	H	3.0	42.3	1.0	-50.5	-13.0	-37.5	
	5137.20	-8.9	H	3.0	43.1	1.0	-51.0	-13.0	-38.0	
	6849.60	-6.2	H	3.0	43.0	1.0	-48.2	-13.0	-35.2	
	Mid Ch, 1732.6MHz									
	3465.20	-8.8	V	3.0	42.3	1.0	-50.1	-13.0	-37.1	
	5197.80	-9.1	V	3.0	43.1	1.0	-51.1	-13.0	-38.1	
	6930.40	-6.6	V	3.0	43.0	1.0	-48.5	-13.0	-35.5	
	3465.20	-8.7	H	3.0	42.3	1.0	-50.0	-13.0	-37.0	
	5197.80	-8.8	H	3.0	43.1	1.0	-50.8	-13.0	-37.8	
	6930.40	-6.3	H	3.0	43.0	1.0	-48.2	-13.0	-35.2	
	High Ch, 1752.6MHz									
	3505.20	-8.7	V	3.0	42.3	1.0	-50.0	-13.0	-37.0	
	5257.80	-9.1	V	3.0	43.1	1.0	-51.1	-13.0	-38.1	
	7010.40	-6.3	V	3.0	42.9	1.0	-48.2	-13.0	-35.2	
	3505.20	-8.7	H	3.0	42.3	1.0	-50.0	-13.0	-37.0	
	5257.80	-8.9	H	3.0	43.1	1.0	-51.0	-13.0	-38.0	
	7010.40	-6.1	H	3.0	42.9	1.0	-48.0	-13.0	-35.0	
Band 4 HSDPA	UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/12/2021 Test Engineer: 22943 Configuration: EUT / AC Adapter, Z-Position Location: Chamber 2 Mode: HSDPA Band 4 Harmonics Test Votage: AC 120 V, 60 Hz									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 1712.4MHz									
	3424.80	-9.3	V	3.0	42.3	1.0	-50.6	-13.0	-37.6	
	5137.20	-9.0	V	3.0	43.1	1.0	-51.1	-13.0	-38.1	
	6849.60	-6.2	V	3.0	43.0	1.0	-48.2	-13.0	-35.2	
	3424.80	-9.2	H	3.0	42.3	1.0	-50.6	-13.0	-37.6	
	5137.20	-8.9	H	3.0	43.1	1.0	-50.9	-13.0	-37.9	
	6849.60	-6.3	H	3.0	43.0	1.0	-48.3	-13.0	-35.3	
	Mid Ch, 1732.6MHz									
	3465.20	-8.7	V	3.0	42.3	1.0	-50.0	-13.0	-37.0	
	5197.80	-8.6	V	3.0	43.1	1.0	-50.7	-13.0	-37.7	
	6930.40	-6.3	V	3.0	43.0	1.0	-48.3	-13.0	-35.3	
	3465.20	-8.8	H	3.0	42.3	1.0	-50.1	-13.0	-37.1	
	5197.80	-8.8	H	3.0	43.1	1.0	-50.9	-13.0	-37.9	
	6930.40	-6.1	H	3.0	43.0	1.0	-48.1	-13.0	-35.1	
	High Ch, 1752.6MHz									
	3505.20	-8.7	V	3.0	42.3	1.0	-50.0	-13.0	-37.0	
	5257.80	-8.9	V	3.0	43.1	1.0	-51.0	-13.0	-38.0	
	7010.40	-6.3	V	3.0	42.9	1.0	-48.2	-13.0	-35.2	
	3505.20	-8.6	H	3.0	42.3	1.0	-49.9	-13.0	-36.9	
	5257.80	-8.8	H	3.0	43.1	1.0	-50.9	-13.0	-37.9	
	7010.40	-6.2	H	3.0	42.9	1.0	-48.1	-13.0	-35.1	

WCDMA Band 2

Band 2 REL99	UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/12/2021 Test Engineer: 22943 Configuration: EUT / AC Adapter, X-Position Location: Chamber 2 Mode: Rel99 Band 2 Harmonics Test Votage: AC 120 V, 60 Hz									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 1852.4MHz									
	3704.80	-11.0	V	3.0	42.3	1.0	-52.4	-13.0	-39.4	
	5557.20	-8.3	V	3.0	43.1	1.0	-50.5	-13.0	-37.5	
	7409.60	-6.3	V	3.0	42.7	1.0	-48.0	-13.0	-35.0	
	3704.80	-11.1	H	3.0	42.3	1.0	-52.4	-13.0	-39.4	
	5557.20	-8.2	H	3.0	43.1	1.0	-50.4	-13.0	-37.4	
	7409.60	-6.3	H	3.0	42.7	1.0	-48.0	-13.0	-35.0	
	Mid Ch, 1880MHz									
	3760.00	-11.1	V	3.0	42.3	1.0	-52.4	-13.0	-39.4	
	5640.00	-7.9	V	3.0	43.2	1.0	-50.0	-13.0	-37.0	
	7520.00	-6.4	V	3.0	42.7	1.0	-48.1	-13.0	-35.1	
	3760.00	-11.0	H	3.0	42.3	1.0	-52.3	-13.0	-39.3	
	5640.00	-8.1	H	3.0	43.2	1.0	-50.2	-13.0	-37.2	
	7520.00	-6.4	H	3.0	42.7	1.0	-48.1	-13.0	-35.1	
	High Ch, 1907.6MHz									
	3815.20	-11.2	V	3.0	42.3	1.0	-52.5	-13.0	-39.5	
	5722.80	-7.9	V	3.0	43.2	1.0	-50.1	-13.0	-37.1	
	7630.40	-6.1	V	3.0	42.6	1.0	-47.7	-13.0	-34.7	
	3815.20	-11.2	H	3.0	42.3	1.0	-52.5	-13.0	-39.5	
	5722.80	-8.0	H	3.0	43.2	1.0	-50.2	-13.0	-37.2	
	7630.40	-6.0	H	3.0	42.6	1.0	-47.6	-13.0	-34.6	
Band 2 HSDPA	UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 11/12/2021 Test Engineer: 22943 Configuration: EUT / AC Adapter, X-Position Location: Chamber 2 Mode: HSDPA Band 2 Harmonics Test Votage: AC 120 V, 60 Hz									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 1852.4MHz									
	3704.80	-11.2	V	3.0	42.3	1.0	-52.6	-13.0	-39.6	
	5557.20	-8.2	V	3.0	43.1	1.0	-50.4	-13.0	-37.4	
	7409.60	-6.3	V	3.0	42.7	1.0	-48.0	-13.0	-35.0	
	3704.80	-11.2	H	3.0	42.3	1.0	-52.5	-13.0	-39.5	
	5557.20	-8.3	H	3.0	43.1	1.0	-50.5	-13.0	-37.5	
	7409.60	-6.4	H	3.0	42.7	1.0	-48.1	-13.0	-35.1	
	Mid Ch, 1880MHz									
	3760.00	-11.2	V	3.0	42.3	1.0	-52.5	-13.0	-39.5	
	5640.00	-7.9	V	3.0	43.2	1.0	-50.1	-13.0	-37.1	
	7520.00	-6.3	V	3.0	42.7	1.0	-48.0	-13.0	-35.0	
	3760.00	-10.9	H	3.0	42.3	1.0	-52.2	-13.0	-39.2	
	5640.00	-7.8	H	3.0	43.2	1.0	-50.0	-13.0	-37.0	
	7520.00	-6.4	H	3.0	42.7	1.0	-48.1	-13.0	-35.1	
	High Ch, 1907.6MHz									
	3815.20	-11.2	V	3.0	42.3	1.0	-52.5	-13.0	-39.5	
	5722.80	-8.1	V	3.0	43.2	1.0	-50.2	-13.0	-37.2	
	7630.40	-6.2	V	3.0	42.6	1.0	-47.9	-13.0	-34.9	
	3815.20	-11.2	H	3.0	42.3	1.0	-52.5	-13.0	-39.5	
	5722.80	-8.0	H	3.0	43.2	1.0	-50.1	-13.0	-37.1	
	7630.40	-6.2	H	3.0	42.6	1.0	-47.8	-13.0	-34.8	

LTE Band 2 (Sub Antenna)

LTE Band 2 5MHz QPSK	UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement Company: Samsung Project #: 4790101660 Date: 12/9/2021 Test Engineer: 19568 Configuration: EUT / AC Adapter, X-Position Location: Chamber 1 Mode: LTE_QPSK Band 2 Harmonics, 5MHz Bandwidth Test Voltage: AC 120 V, 60 Hz									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1852.5MHz										
	3705.00	-10.7	V	3.0	45.8	1.0	-55.5	-13.0	-42.5	
	5557.50	-8.3	V	3.0	45.7	1.0	-53.1	-13.0	-40.1	
	7410.00	-5.4	V	3.0	44.6	1.0	-48.9	-13.0	-35.9	
	3705.00	-10.7	H	3.0	45.8	1.0	-55.5	-13.0	-42.5	
	5557.50	-8.4	H	3.0	45.7	1.0	-53.1	-13.0	-40.1	
	7410.00	-5.6	H	3.0	44.6	1.0	-49.1	-13.0	-36.1	
Mid Ch, 1880MHz										
	3760.00	-10.5	V	3.0	45.8	1.0	-55.3	-13.0	-42.3	
	5640.00	-8.2	V	3.0	45.7	1.0	-53.0	-13.0	-40.0	
	7520.00	-5.5	V	3.0	44.5	1.0	-49.0	-13.0	-36.0	
	3760.00	-11.3	H	3.0	45.8	1.0	-56.1	-13.0	-43.1	
	5640.00	-8.2	H	3.0	45.7	1.0	-52.9	-13.0	-39.9	
	7520.00	-5.0	H	3.0	44.5	1.0	-48.5	-13.0	-35.5	
High Ch, 1907.5MHz										
	3815.00	-10.1	V	3.0	45.8	1.0	-54.9	-13.0	-41.9	
	5722.50	-7.9	V	3.0	45.7	1.0	-52.7	-13.0	-39.7	
	7630.00	-5.5	V	3.0	44.4	1.0	-48.9	-13.0	-35.9	
	3815.00	-10.3	H	3.0	45.8	1.0	-55.2	-13.0	-42.2	
	5722.50	-8.1	H	3.0	45.7	1.0	-52.9	-13.0	-39.9	
	7630.00	-5.5	H	3.0	44.4	1.0	-48.9	-13.0	-35.9	

LTE Band 13

LTE
Band 13

10MHz

QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: Samsung

Project #: 4790101660

Date: 11/10/2021

Test Engineer: 20882

Configuration: EUT / AC Adapter, Y-Position

Location: Chamber 2

Mode: LTE_QPSK Band 13 Harmonics, 10MHz Bandwidth

Test Votage: AC 120 V, 60 Hz

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Mid Ch, 782MHz									
1564.00	-30.2	V	3.0	40.9	1.0	-70.1	-40.0	-30.1	
2346.00	-13.3	V	3.0	41.4	1.0	-53.6	-13.0	-40.6	
3128.00	-9.8	V	3.0	42.3	1.0	-51.1	-13.0	-38.1	
1564.00	-30.4	H	3.0	40.9	1.0	-70.4	-40.0	-30.4	
2346.00	-13.2	H	3.0	41.4	1.0	-53.6	-13.0	-40.6	
3128.00	-10.3	H	3.0	42.3	1.0	-51.6	-13.0	-38.6	

Note : No narrowband emissions so only applied the -70dBW/MHz (-40dBm/MHz) wideband emission limit for the 1559-1610 MHz band

LTE Band 25

LTE Band 25 3MHz QPSK	UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
	Company: Samsung Project #: 4790101660 Date: 11/8/2021 Test Engineer: 19568 Configuration: EUT / AC Adpater, Z-Position Location: Chamber 2 Mode: LTE_QPSK Band 25 Harmonics, 3MHz Bandwidth Test Votage: AC 120 V, 60 Hz									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamplifier (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 1851.5MHz									
	3703.00	-7.9	V	3.0	42.3	1.0	-49.2	-13.0	-36.2	
	5554.50	-8.4	V	3.0	43.1	1.0	-50.5	-13.0	-37.5	
	7406.00	-6.3	V	3.0	42.7	1.0	-48.0	-13.0	-35.0	
	3703.00	-8.2	H	3.0	42.3	1.0	-49.5	-13.0	-36.5	
	5554.50	-8.3	H	3.0	43.1	1.0	-50.4	-13.0	-37.4	
	7406.00	-6.3	H	3.0	42.7	1.0	-48.0	-13.0	-35.0	
	Mid Ch, 1882.5MHz									
	3765.00	-8.9	V	3.0	42.3	1.0	-50.2	-13.0	-37.2	
	5647.50	-7.9	V	3.0	43.2	1.0	-50.1	-13.0	-37.1	
	7530.00	-6.4	V	3.0	42.7	1.0	-48.1	-13.0	-35.1	
	3765.00	-9.1	H	3.0	42.3	1.0	-50.4	-13.0	-37.4	
	5647.50	-8.0	H	3.0	43.2	1.0	-50.2	-13.0	-37.2	
	7530.00	-6.3	H	3.0	42.7	1.0	-48.0	-13.0	-35.0	
	High Ch, 1913.5MHz									
	3827.00	-10.7	V	3.0	42.3	1.0	-52.0	-13.0	-39.0	
	5740.50	-8.2	V	3.0	43.2	1.0	-50.4	-13.0	-37.4	
	7654.00	-6.4	V	3.0	42.6	1.0	-48.0	-13.0	-35.0	
	3827.00	-9.7	H	3.0	42.3	1.0	-51.1	-13.0	-38.1	
	5740.50	-8.2	H	3.0	43.2	1.0	-50.4	-13.0	-37.4	
	7654.00	-6.5	H	3.0	42.6	1.0	-48.1	-13.0	-35.1	

LTE Band 26 (Part 90)

LTE Band 26 5MHz QPSK	UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
	Company: Samsung Project #: 4790101660 Date: 11/10/2021 Test Engineer: 20882 Configuration: EUT / AC Adapter, Y-Position Location: Chamber 2 Mode: LTE_QPSK Band 26 Harmonics, 5MHz Bandwidth Test Votage: AC 120 V, 60 Hz									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 826.5MHz									
	1653.00	-15.8	V	3.0	40.9	1.0	-55.7	-13.0	-42.7	
	2479.50	-12.3	V	3.0	41.6	1.0	-52.8	-13.0	-39.8	
	3306.00	-9.5	V	3.0	42.3	1.0	-50.8	-13.0	-37.8	
	1653.00	-16.1	H	3.0	40.9	1.0	-56.0	-13.0	-43.0	
	2479.50	-12.9	H	3.0	41.6	1.0	-53.4	-13.0	-40.4	
	3306.00	-9.7	H	3.0	42.3	1.0	-51.0	-13.0	-38.0	
	Mid Ch, 831.5MHz									
	1663.00	-15.6	V	3.0	40.9	1.0	-55.5	-13.0	-42.5	
	2494.50	-12.5	V	3.0	41.6	1.0	-53.1	-13.0	-40.1	
	3326.00	-9.6	V	3.0	42.3	1.0	-50.9	-13.0	-37.9	
	1663.00	-16.1	H	3.0	40.9	1.0	-56.1	-13.0	-43.1	
	2494.50	-12.8	H	3.0	41.6	1.0	-53.4	-13.0	-40.4	
	3326.00	-9.8	H	3.0	42.3	1.0	-51.1	-13.0	-38.1	
	High Ch, 846.5MHz									
	1693.00	-15.3	V	3.0	40.9	1.0	-55.2	-13.0	-42.2	
	2539.50	-12.4	V	3.0	41.6	1.0	-53.0	-13.0	-40.0	
	3386.00	-8.9	V	3.0	42.3	1.0	-50.2	-13.0	-37.2	
	1693.00	-16.0	H	3.0	40.9	1.0	-55.9	-13.0	-42.9	
	2539.50	-12.6	H	3.0	41.6	1.0	-53.3	-13.0	-40.3	
	3386.00	-8.8	H	3.0	42.3	1.0	-50.1	-13.0	-37.1	

LTE Band 26 (Straddle)

LTE Band 26 5MHz QPSK	UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
	Company: Samsung Project #: 4790101660 Date: 11/10/2021 Test Engineer: 20882 Configuration: EUT / AC Adapter, Y-Position Location: Chamber 2 Mode: LTE_QPSK Band 26 Harmonics, 5MHz Bandwidth Test Votage: AC 120 V, 60 Hz									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Straddle Ch, 824MHz									
	1648.00	-15.6	V	3.0	40.9	1.0	-55.5	-13.0	-42.5	
	2472.00	-12.5	V	3.0	41.5	1.0	-53.0	-13.0	-40.0	
	3296.00	-9.6	V	3.0	42.3	1.0	-50.9	-13.0	-37.9	
	1648.00	-16.1	H	3.0	40.9	1.0	-56.1	-13.0	-43.1	
	2472.00	-13.1	H	3.0	41.5	1.0	-53.6	-13.0	-40.6	
	3296.00	-9.4	H	3.0	42.3	1.0	-50.7	-13.0	-37.7	

LTE Band 26 (Part 22)

LTE Band 26 5MHz QPSK	UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
	Company: Samsung Project #: 4790101660 Date: 11/10/2021 Test Engineer: 20882 Configuration: EUT / AC Adapter, Y-Position Location: Chamber 2 Mode: LTE_QPSK Band 26 Harmonics, 5MHz Bandwidth Test Votage: AC 120 V, 60 Hz									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 816.5MHz									
	1653.00	-15.6	V	3.0	40.9	1.0	-55.5	-13.0	-42.5	
	2479.50	-12.6	V	3.0	41.6	1.0	-53.2	-13.0	-40.2	
	3306.00	-9.7	V	3.0	42.3	1.0	-51.0	-13.0	-38.0	
	1653.00	-16.2	H	3.0	40.9	1.0	-56.1	-13.0	-43.1	
	2479.50	-12.9	H	3.0	41.6	1.0	-53.5	-13.0	-40.5	
	3306.00	-9.7	H	3.0	42.3	1.0	-51.0	-13.0	-38.0	
	Mid Ch, 821.5MHz									
	1643.00	-15.2	V	3.0	40.9	1.0	-55.1	-13.0	-42.1	
	2464.50	-12.8	V	3.0	41.5	1.0	-53.3	-13.0	-40.3	
	3286.00	-9.8	V	3.0	42.3	1.0	-51.1	-13.0	-38.1	
	1643.00	-16.0	H	3.0	40.9	1.0	-55.9	-13.0	-42.9	
	2464.50	-13.0	H	3.0	41.5	1.0	-53.5	-13.0	-40.5	
	3286.00	-9.8	H	3.0	42.3	1.0	-51.1	-13.0	-38.1	

LTE Band 41 (PC2)

LTE

Band 41

(PC2)

10MHz

QPSK

UL Verification Services, Inc.

Above 1GHz High Frequency Substitution Measurement

Company:

Project #:

Date:

Test Engineer:

Configuration:

Location:

Mode:

Test Votage:

Samsung

4790101660

11/11/2021

22943

EUT, X-Position

Chamber 2

LTE_QPSK Band 41 Harmonics, 10MHz Bandwidth

AC 120 V, 60 Hz

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2501MHz									
5002.00	-15.2	V	3.0	43.0	1.0	-57.2	-25.0	-32.2	
7503.00	-10.6	V	3.0	42.7	1.0	-52.2	-25.0	-27.2	
10004.00	-13.4	V	3.0	41.1	1.0	-53.5	-25.0	-28.5	
5002.00	-17.8	H	3.0	43.0	1.0	-59.8	-25.0	-34.8	
7503.00	-13.8	H	3.0	42.7	1.0	-55.5	-25.0	-30.5	
10004.00	-13.5	H	3.0	41.1	1.0	-53.6	-25.0	-28.6	
Mid Ch, 2593MHz									
5186.00	-13.7	V	3.0	43.1	1.0	-55.8	-25.0	-30.8	
7779.00	-14.7	V	3.0	42.5	1.0	-56.2	-25.0	-31.2	
10372.00	-13.1	V	3.0	41.3	1.0	-53.3	-25.0	-28.3	
5186.00	-17.0	H	3.0	43.1	1.0	-59.0	-25.0	-34.0	
7779.00	-16.6	H	3.0	42.5	1.0	-58.2	-25.0	-33.2	
10372.00	-13.2	H	3.0	41.3	1.0	-53.5	-25.0	-28.5	
High Ch, 2685MHz									
5370.00	-10.5	V	3.0	43.1	1.0	-52.6	-25.0	-27.6	
8055.00	-14.7	V	3.0	42.4	1.0	-56.1	-25.0	-31.1	
10740.00	-12.3	V	3.0	41.4	1.0	-52.8	-25.0	-27.8	
5370.00	-14.7	H	3.0	43.1	1.0	-56.8	-25.0	-31.8	
8055.00	-16.8	H	3.0	42.4	1.0	-58.2	-25.0	-33.2	
10740.00	-12.5	H	3.0	41.4	1.0	-52.9	-25.0	-27.9	

LTE Band 66

	UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)
LTE Band 66 20MHz QPSK	Company: Samsung								
	Project #: 4790101660								
	Date: 11/12/2021								
	Test Engineer: 20882								
	Configuration: EUT/ AC Adapter, Z-Position								
	Location: Chamber 2								
	Mode: LTE_QPSK Band 66 Harmonics, 20MHz Bandwidth								
	Test Voltage: AC 120 V, 60 Hz								
	Notes								
	Low Ch, 1720MHz								
	3440.00	-9.5	V	3.0	42.3	1.0	-50.8	-13.0	-37.8
	5160.00	-9.2	V	3.0	43.1	1.0	-51.3	-13.0	-38.3
	6880.00	-6.4	V	3.0	43.0	1.0	-48.3	-13.0	-35.3
	3440.00	-9.3	H	3.0	42.3	1.0	-50.6	-13.0	-37.6
	5160.00	-8.9	H	3.0	43.1	1.0	-51.0	-13.0	-38.0
	6880.00	-6.3	H	3.0	43.0	1.0	-48.3	-13.0	-35.3
	Mid Ch, 1745MHz								
	3490.00	-9.0	V	3.0	42.3	1.0	-50.3	-13.0	-37.3
	5235.00	-9.0	V	3.0	43.1	1.0	-51.1	-13.0	-38.1
	6980.00	-6.4	V	3.0	42.9	1.0	-48.4	-13.0	-35.4
	3490.00	-8.9	H	3.0	42.3	1.0	-50.2	-13.0	-37.2
	5235.00	-8.9	H	3.0	43.1	1.0	-51.0	-13.0	-38.0
	6980.00	-6.3	H	3.0	42.9	1.0	-48.2	-13.0	-35.2
	High Ch, 1770MHz								
	3540.00	-8.3	V	3.0	42.3	1.0	-49.6	-13.0	-36.6
	5310.00	-8.2	V	3.0	43.1	1.0	-50.3	-13.0	-37.3
	7080.00	-6.3	V	3.0	42.9	1.0	-48.2	-13.0	-35.2
	3540.00	-8.1	H	3.0	42.3	1.0	-49.4	-13.0	-36.4
	5310.00	-8.6	H	3.0	43.1	1.0	-50.7	-13.0	-37.7
	7080.00	-6.1	H	3.0	42.9	1.0	-47.9	-13.0	-34.9

NR Band 5

NR

Band 5

20MHz

QPSK

UL Verification Services, Inc.

Above 1GHz High Frequency Substitution Measurement

Company:

Project #:

Date:

Test Engineer:

Configuration:

Location:

Mode:

Test Votage:

Samsung

4790101660

11/11/2021

25546

EUT / AC Adapter, Y-Position

Chamber 1

LTE_QPSK NR n5 Harmonics, 20MHz Bandwidth

AC 120 V, 60 Hz

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 834MHz									
1668.00	-15.2	V	3.0	45.6	1.0	-59.8	-13.0	-46.8	
2502.00	-11.8	V	3.0	45.5	1.0	-56.3	-13.0	-43.3	
3336.00	-9.7	V	3.0	45.7	1.0	-54.4	-13.0	-41.4	
1668.00	-16.1	H	3.0	45.6	1.0	-60.7	-13.0	-47.7	
2502.00	-12.3	H	3.0	45.5	1.0	-56.7	-13.0	-43.7	
3336.00	-9.4	H	3.0	45.7	1.0	-54.1	-13.0	-41.1	
Mid Ch, 836.5MHz									
1673.00	-14.3	V	3.0	45.6	1.0	-58.9	-13.0	-45.9	
2509.50	-11.8	V	3.0	45.5	1.0	-56.3	-13.0	-43.3	
3346.00	-9.3	V	3.0	45.7	1.0	-54.0	-13.0	-41.0	
1673.00	-16.1	H	3.0	45.6	1.0	-60.7	-13.0	-47.7	
2509.50	-12.4	H	3.0	45.5	1.0	-56.8	-13.0	-43.8	
3346.00	-9.3	H	3.0	45.7	1.0	-54.0	-13.0	-41.0	
High Ch, 839MHz									
1678.00	-15.1	V	3.0	45.6	1.0	-59.7	-13.0	-46.7	
2517.00	-11.7	V	3.0	45.5	1.0	-56.2	-13.0	-43.2	
3356.00	-9.2	V	3.0	45.7	1.0	-53.9	-13.0	-40.9	
1678.00	-16.1	H	3.0	45.6	1.0	-60.7	-13.0	-47.7	
2517.00	-12.3	H	3.0	45.5	1.0	-56.7	-13.0	-43.7	
3356.00	-9.2	H	3.0	45.7	1.0	-53.9	-13.0	-40.9	

NR Band 66

NR

Band 66

20MHz

QPSK

UL Verification Services, Inc.

Above 1GHz High Frequency Substitution Measurement

Company:

Project #:

Date:

Test Engineer:

Configuration:

Location:

Mode:

Test Votage:

Samsung

4790101660

11/9/2021

19568

EUT / AC Adapter, Y-Position

Chamber 1

LTE_QPSK NR n66 Harmonics, 20MHz Bandwidth

AC 120 V, 60 Hz

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1720MHz									
3440.00	-6.4	V	3.0	45.7	1.0	-51.1	-13.0	-38.1	
5160.00	-9.5	V	3.0	45.8	1.0	-54.3	-13.0	-41.3	
6880.00	-6.2	V	3.0	44.9	1.0	-50.1	-13.0	-37.1	
3440.00	-8.5	H	3.0	45.7	1.0	-53.2	-13.0	-40.2	
5160.00	-9.4	H	3.0	45.8	1.0	-54.2	-13.0	-41.2	
6880.00	-6.4	H	3.0	44.9	1.0	-50.2	-13.0	-37.2	
Mid Ch, 1745MHz									
3490.00	-6.6	V	3.0	45.7	1.0	-51.3	-13.0	-38.3	
5235.00	-9.2	V	3.0	45.8	1.0	-54.0	-13.0	-41.0	
6980.00	-5.9	V	3.0	44.8	1.0	-49.7	-13.0	-36.7	
3490.00	-7.8	H	3.0	45.7	1.0	-52.5	-13.0	-39.5	
5235.00	-9.0	H	3.0	45.8	1.0	-53.8	-13.0	-40.8	
6980.00	-6.0	H	3.0	44.8	1.0	-49.8	-13.0	-36.8	
High Ch, 1770MHz									
3540.00	-6.2	V	3.0	45.8	1.0	-51.0	-13.0	-38.0	
5310.00	-9.0	V	3.0	45.8	1.0	-53.8	-13.0	-40.8	
7080.00	-5.8	V	3.0	44.7	1.0	-49.5	-13.0	-36.5	
3540.00	-8.0	H	3.0	45.8	1.0	-52.8	-13.0	-39.8	
5310.00	-9.0	H	3.0	45.8	1.0	-53.8	-13.0	-40.8	
7080.00	-6.0	H	3.0	44.7	1.0	-49.7	-13.0	-36.7	

END OF REPORT