

MEASUREMENT REPORT
FCC PART 15.247 WLAN 802.11b/g/n/ax

Applicant Name:

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

04/03/2023 - 05/18/2023

Test Report Issue Date:

05/19/2023

Test Site/Location:

Element Lab. Yongin-Si, Gyeonggi-do, South Korea

Test Report Serial No.:

1M2303200036-04.A3L

FCC ID:

A3LSMX910

IC

649E-SMX910

APPLICANT:

Samsung Electronics Co., Ltd.

Application Type:

Certification

Model/HVIN:

SM-X910

EUT Type:

Portable Tablet

Frequency Range:

2412 – 2472MHz

Modulation Type:

CCK, DSSS, OFDM

FCC Classification:

Digital Transmission System (DTS)

FCC Rule Part(s):

Part 15 Subpart C (15.247)

ISED Specification:

RSS-247 Issue 2

Test Procedure(s):

ANSI C63.10-2013

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Prepared by



Reviewed by

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 1 of 135

TABLE OF CONTENTS

1.0	INTRODUCTION.....	5
1.1	Scope	5
1.2	Element Test Location.....	5
1.3	Test Facility / Accreditations.....	5
2.0	PRODUCT INFORMATION	6
2.1	Equipment Description	6
2.2	Device Capabilities	6
2.3	Test Configuration	8
2.4	Antenna Description	8
2.5	Software and Firmware	8
2.6	EMI Suppression Device(s) / Modifications	8
3.0	DESCRIPTION OF TESTS	9
3.1	Evaluation Procedure	9
3.2	AC Line Conducted Emissions	9
3.3	Radiated Emissions.....	10
3.4	Environmental Conditions.....	10
4.0	ANTENNA REQUIREMENTS	11
5.0	MEASUREMENT UNCERTAINTY.....	12
6.0	TEST EQUIPMENT CALIBRATION DATA.....	13
7.0	TEST RESULTS.....	14
7.1	Summary	14
7.2	6dB Bandwidth Measurement	16
7.2.1	SISO Antenna-2 6dB Bandwidth Measurements.....	17
7.2.2	MIMO Antenna-1 6dB Bandwidth Measurements	24
7.2.3	MIMO Antenna-2 6dB Bandwidth Measurements	31
7.3	Output Power Measurement.....	38
7.4	Power Spectral Density	42
7.4.1	SISO Antenna-2 Power Spectral Density Measurements.....	43
7.4.2	MIMO Power Spectral Density Measurements.....	50
7.5	Conducted Band Edge Emissions	64
7.5.1	SISO Antenna-2 Conducted Band Edge Emissions	65
7.5.2	MIMO Antenna-1 Conducted Band Edge Emissions	76
7.5.3	MIMO Antenna-2 Conducted Band Edge Emissions	87
7.6	Conducted Spurious Emissions.....	98
7.6.1	SISO Antenna-2 Conducted Spurious Emissions.....	100
7.6.2	MIMO Antenna-1 Conducted Spurious Emissions	103
7.6.3	MIMO Antenna-1 Conducted Spurious Emissions	106

FCC ID: A3LSMX910 IC: 649E-SMX910		MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet		Page 2 of 135

7.7	Radiated Emission Measurements	109
7.7.1	SISO Antenna-2 Radiated Spurious Emission Measurements	113
7.7.2	MIMO Radiated Spurious Emission Measurements	117
7.7.3	SISO Antenna-2 Radiated Restricted Band Edge Measurements	121
7.7.4	MIMO Radiated Restricted Band Edge Measurements	124
7.8	Radiated Spurious Emissions Measurements – Below 1GHz	127
7.9	Line-Conducted Test Data.....	131
8.0	CONCLUSION	135

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 3 of 135

MEASUREMENT REPORT

Mode	Tx Frequency (MHz)	ANT2				MIMO			
		Avg Conducted		Peak Conducted		Avg Conducted		Peak Conducted	
		Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
802.11b	2412 - 2472	78.524	18.95	171.791	22.35	154.882	21.90	335.738	25.26
802.11g	2412 - 2472	58.210	17.65	189.671	22.78	124.165	20.94	447.713	26.51
802.11n	2412 - 2472	60.534	17.82	213.304	23.29	124.738	20.96	440.555	26.44
802.11ax	2412 - 2472	56.105	17.49	231.739	23.65	120.781	20.82	458.142	26.61

EUT Overview

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 4 of 135

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

These measurement tests were conducted at the Element Suwon Laboratory located at 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do, 16954, South Korea. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology Suwon, Ltd. located in Yongin-si, Gyeonggi-do, 16954, South Korea.

- Element Materials Technology Suwon, Ltd. is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.04 for Specific Absorption Rate (SAR), and Electromagnetic Compatibility (EMC) & Telecommunications testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Materials Technology Suwon, Ltd. facility is accredited, designated, and recognized in accordance with the provision of Radio Wave Act and International Standard ISO/IEC 17025:2017 under the National Radio Research Agency.
 - Designation Number / CABID: KR0169
 - Test Firm Registration Number of FCC: 417945
 - Test Firm Registration Number of ISED: 26168

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 5 of 135

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Tablet FCC ID: A3LSMX910, IC: 649E-SMX910**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN (DTS) transmitter.

Test Device Serial No.: 0150M, 4628G, 3657M

2.2 Device Capabilities

This device contains the following capabilities:

802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5 and 6 GHz), Bluetooth (1x, EDR, LE), Wireless Power Transfer

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442		

Table 2-1. Frequency \ Channel Operations

Notes:

1. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of ANSI C63.10-2013 and KDB 558074 D01 v05r02. The RBW and VBW were both greater than 50\T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Maximum Achievable Duty Cycles			
802.11 Mode/Band		Duty Cycle [%]	
		ANT2	MIMO
2.4GHz	b	98.9	98.8
	g	96.4	96.4
	n	97.9	98.0
	ax	99.7	99.5

Table 2-2. Measured Duty Cycles

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 6 of 135

2. The device employs MIMO technology. Below are the possible configurations.

Antenna / Technology Configurations		SISO		SDM		CDD	
		ANT1	ANT2	ANT1	ANT2	ANT1	ANT2
2.4GHz	11b	✗	✓	✗	✗	✓	✓
	11g	✗	✓	✗	✗	✓	✓
	11n	✗	✓	✓	✓	✓	✓
	11ax	✗	✓	✓	✓	✓	✓

Table 2-3. Antenna / Technology Configuration

✓ = Support; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

CDD = Cyclic Delay Diversity - 2Tx Function

3. The device supports the following data rates (shown in Mbps):

802.11b	802.11a/g	MCS Index		Spatial Stream	OFDM (802.11n)		OFDM (802.11ax)		
20MHz	20MHz				20MHz		20MHz		
		HT	HE		0.8μs GI	0.4μs GI	0.8μs GI	1.6μs GI	3.2μs GI
1	6	0	0	1	6.5	7.2	8.6	8.1	7.3
2	9	1	1	1	13	14.4	17.2	16.3	14.6
5.5	12	2	2	1	19.5	21.7	25.8	24.4	21.9
11	18	3	3	1	26	28.9	34.4	32.5	29.3
	24	4	4	1	39	43.3	51.6	48.8	43.9
	36	5	5	1	52	57.8	68.8	65	58.5
	48	6	6	1	58.5	65	77.4	73.1	65.8
	54	7	7	1	65	72.2	86	81.3	73.1
			8	1			103.2	97.5	87.8
			9	1			114.7	108.3	97.5
			10	1			129	121.9	109.7
			11	1			143.4	135.4	121.9
1	6	8	0	2	13	14.4	17.2	16.3	14.6
2	9	9	1	2	26	28.9	34.4	32.5	29.3
5.5	12	10	2	2	39	43.3	51.6	48.8	43.9
11	18	11	3	2	52	57.8	68.8	65	58.5
	24	12	4	2	78	86.7	103.2	97.5	87.8
	36	13	5	2	104	115.6	137.6	130	117
	48	14	6	2	117	130	154.9	146.3	131.6
	54	15	7	2	130	144.4	172.1	162.5	146.3
			8	2	156	173.3	206.5	195	175.5
			9	2	N/A	N/A	229.4	216.7	195
			10	2			258.1	243.8	219.4
			11	2			286.8	270.8	243.8

Table 2-4. Supported Data Rates

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 7 of 135

2.3 Test Configuration

ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 7.9 for AC line conducted emissions test setups, 7.7 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5, and 7.6 for antenna port conducted emissions test setups.

2.4 Antenna Description

The following antenna gains were used for the testing.

Frequency [GHz]	Antenna-1 Gain [dBi]	Antenna-2 Gain [dBi]
2.4	-5.01	-5.83

Table 2-5. Antenna Peak Gain

2.5 Software and Firmware

The test was conducted with software/firmware version X910XXU0AWD5 installed on the EUT.

2.6 EMI Suppression Device(s) / Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 8 of 135

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) was used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω\\50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI\\RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration\\arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.9. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 9 of 135

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 10 of 135

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules\Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connections to an external antenna.

Conclusion:

The EUT unit complies with the requirement of §15.203.

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 11 of 135

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.37
Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	3.94
Radiated Disturbance (>1GHz)	4.75
Radiated Disturbance (>18GHz)	4.84

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 12 of 135

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Dual Directional Coupler	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	N9030A	PXA Signal Analyzer(3Hz-26.5GHz)	7/4/2022	Annual	7/3/2023	MY49432391
Anritsu	S820E	Cable and Antenna Analyzer	7/6/2022	Annual	7/5/2023	1839097
Anritsu	TOSLK50A-40	Calibration Kit	N/A	-	N/A	1825024
COM-Power Corporation	AL-130R	Active Loop Antenna	10/21/2022	Biennial	10/20/2024	10160045
MINI-CIRCUITS	BW-N10W5+	ATTENUATOR(DC-18GHz)	4/6/2023	Annual	4/5/2024	2106
NARDA	180-442A-KF	Horn Antenna(18GHz-40GHz)	11/23/2022	Biennial	11/22/2024	T058701-03
PASTER NACK	PE2209-6	Dual Directional Coupler	7/5/2022	Annual	7/4/2023	N/A
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	8/26/2022	Annual	8/25/2023	166818
Rohde & Schwarz	ENV216	Two-Line V-Network	4/7/2023	Annual	4/6/2024	101319
Rohde & Schwarz	ESW	EMI Test Receiver(2Hz-44GHz)	7/4/2022	Annual	7/3/2023	101761
Rohde & Schwarz	FSW43	Signal and Spectrum Analyzer(2Hz-43.5GHz)	1/13/2023	Annual	1/12/2024	101955
Rohde & Schwarz	TS-PR1840	Preamplifier(18GHz-40GHz)	7/6/2022	Annual	7/5/2023	100049
Rohde & Schwarz	TS-SFUNIT-Rx	Shielded Filter Unit	1/13/2023	Annual	1/12/2024	102131
Schwarzbeck	VULB9162	Broadband TRILOG Antenna(30MHz-1GHz)	7/13/2021	Biennial	7/12/2023	9162-217
Sunol Sciences	DRH-118	Horn Antenna(1GHz-18GHz)	1/26/2023	Biennial	1/25/2025	A102416-1
TESTEK	-	LISN Extension Cord	4/7/2023	Annual	4/6/2024	N/A

Table 6-1. Annual Test Equipment Calibration Schedule

Note:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 13 of 135

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.

FCC ID: A3LSMX910

IC: 649E-SMX910

FCC Classification: Digital Transmission System (DTS)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	RSS-247 [5.2(a)]	6dB Bandwidth	The minimum 6 dB bandwidth shall be at least 500 kHz.	CONDUCTED	PASS	Section 7.2
15.247(b)(3)	RSS-247 [5.4(b)]	Transmitter Output Power	shall not exceed 1 W		PASS	Section 7.3
N/A	RSS-247 [5.4(b)]	e.i.r.p.	shall not exceed 4 W		PASS	Section 7.3
15.247(e)	RSS-247 [5.2(b)]	Transmitter Power Spectral Density	shall not be greater than 8 dBm in any 3 kHz band		PASS	Section 7.4
15.247(d)	RSS-247 [5.5]	Band Edge \ Out-of-Band Emissions	≥ 20dBc		PASS	Sections 7.5, 7.6
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])	RADIATED	PASS	Section 7.7
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits (RSS-Gen [8.8])	LINE CONDUCTED	PASS	Section 7.9

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst-case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “WLAN Automation,” Version 3.5.

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 14 of 135



- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “Chamber Automation,” Version 1.3.1.

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 15 of 135

7.2 6dB Bandwidth Measurement

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 11.8.2 Option 2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

None.


FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 16 of 135

7.2.1 SISO Antenna-2 6dB Bandwidth Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
2412	1	b	1	9.140	0.500
2437	6	b	1	9.143	0.500
2462	11	b	1	9.154	0.500
2412	1	g	6	16.37	0.500
2437	6	g	6	16.35	0.500
2462	11	g	6	16.37	0.500
2412	1	n	6.5/7.2 (MCS0)	17.59	0.500
2437	6	n	6.5/7.2 (MCS0)	17.61	0.500
2462	11	n	6.5/7.2 (MCS0)	17.61	0.500
2412	1	ax	6.5/7.2 (MCS0)	18.98	0.500
2437	6	ax	6.5/7.2 (MCS0)	17.63	0.500
2462	11	ax	6.5/7.2 (MCS0)	17.62	0.500

Table 7-2. Conducted 6dB Bandwidth Measurements SISO ANT2

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 17 of 135

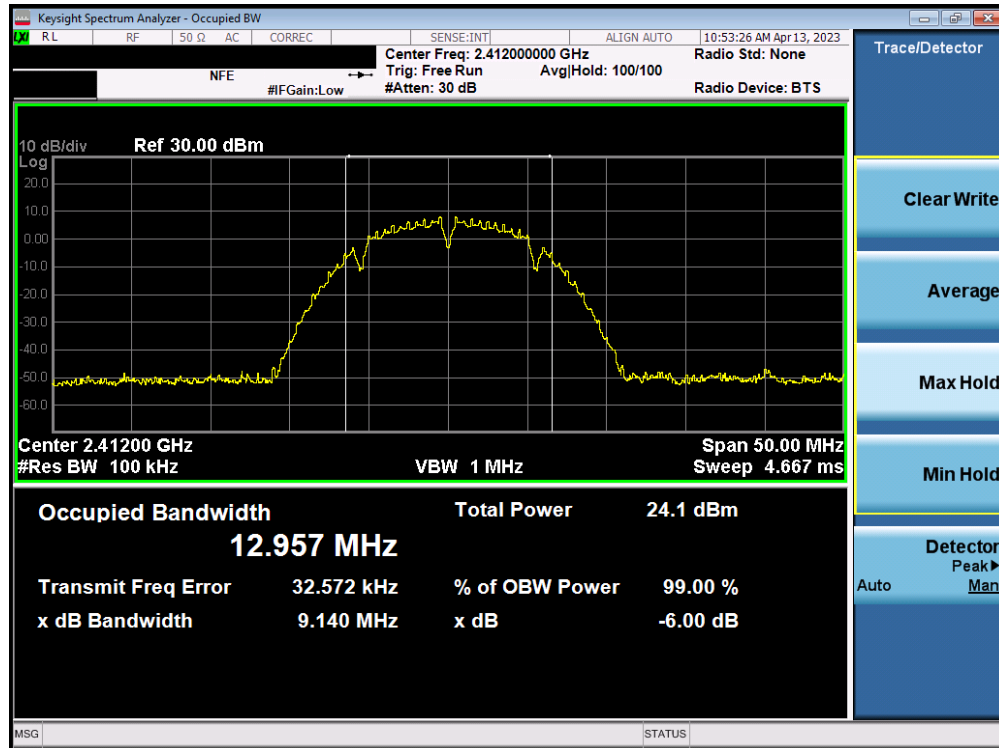


Plot 7-1. 6dB Bandwidth Plot SISO ANT2 (802.11b – Ch. 1)

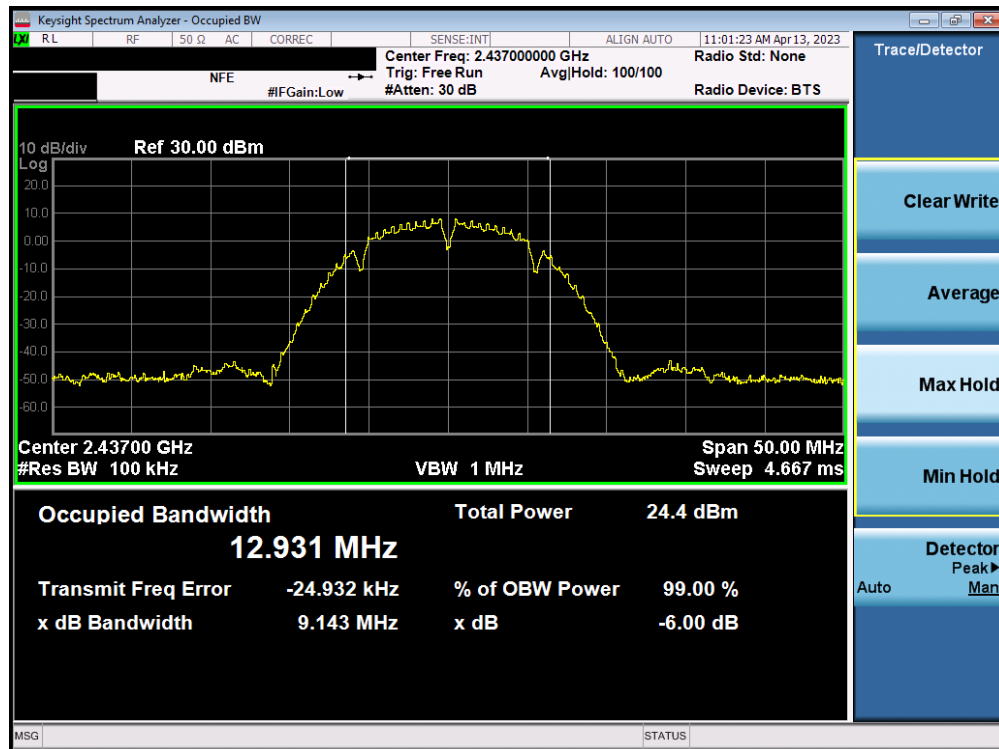


Plot 7-2. 6dB Bandwidth Plot SISO ANT2 (802.11b – Ch. 6)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 18 of 135

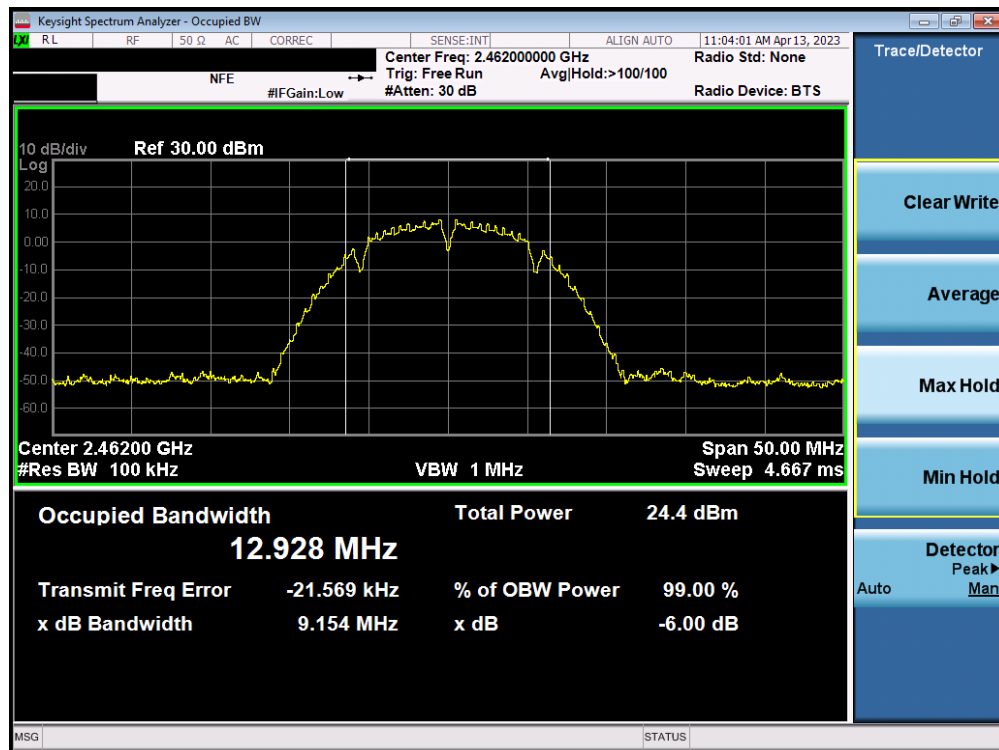


Plot 7-3. 6dB Bandwidth Plot SISO ANT2 (802.11b – Ch. 11)

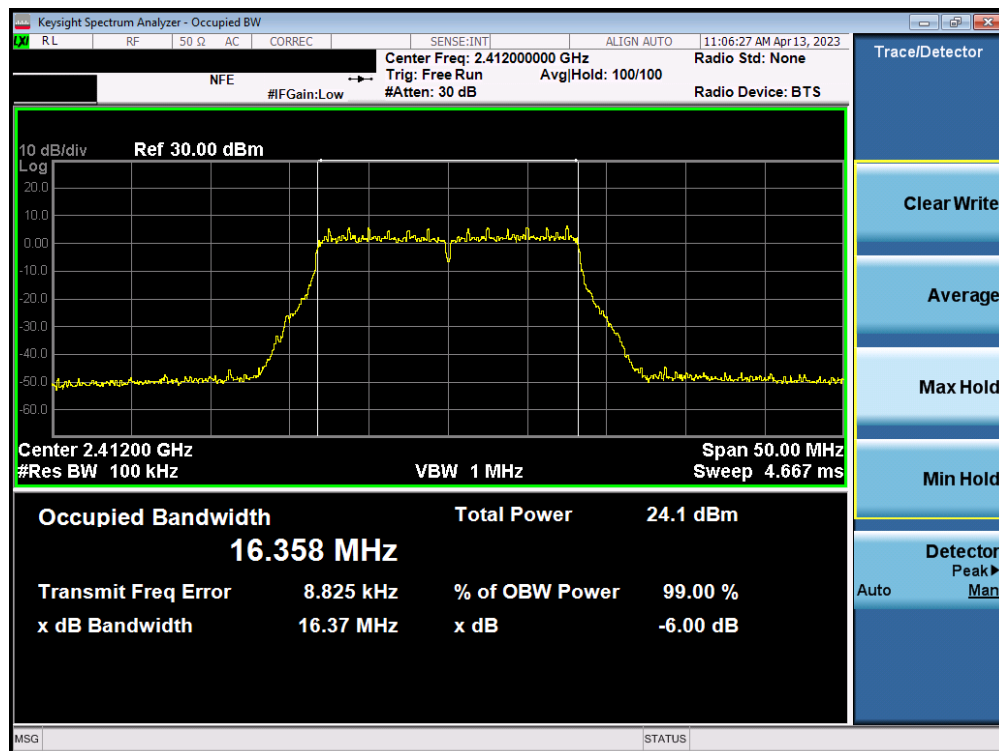


Plot 7-4. 6dB Bandwidth Plot SISO ANT2 (802.11g – Ch. 1)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 19 of 135

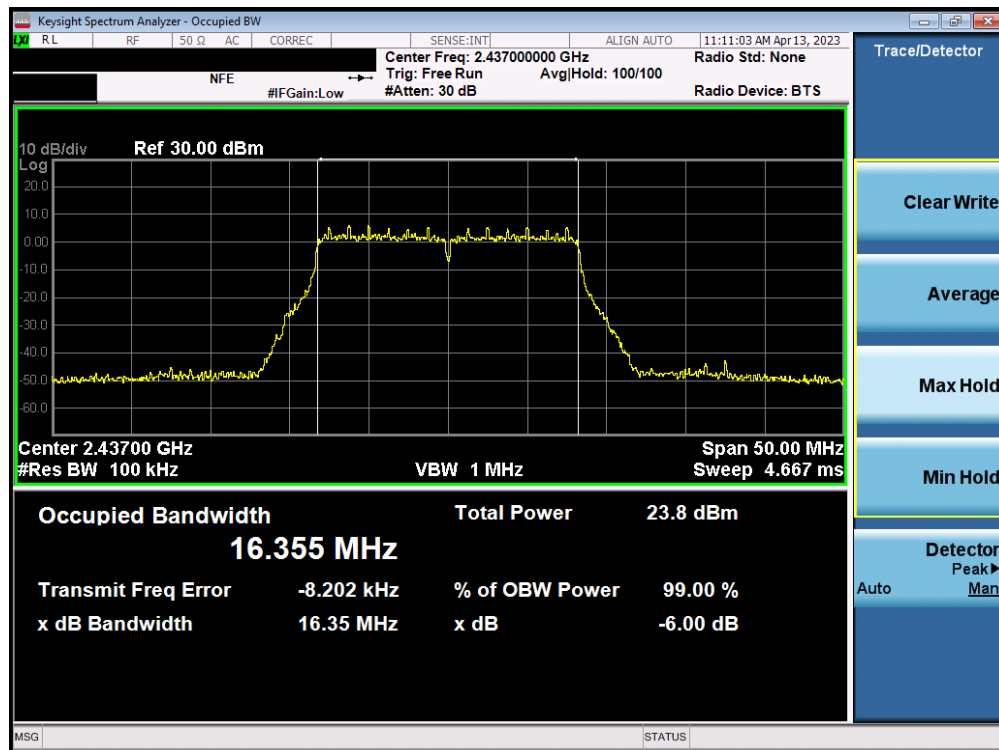


Plot 7-5. 6dB Bandwidth Plot SISO ANT2 (802.11g – Ch. 6)

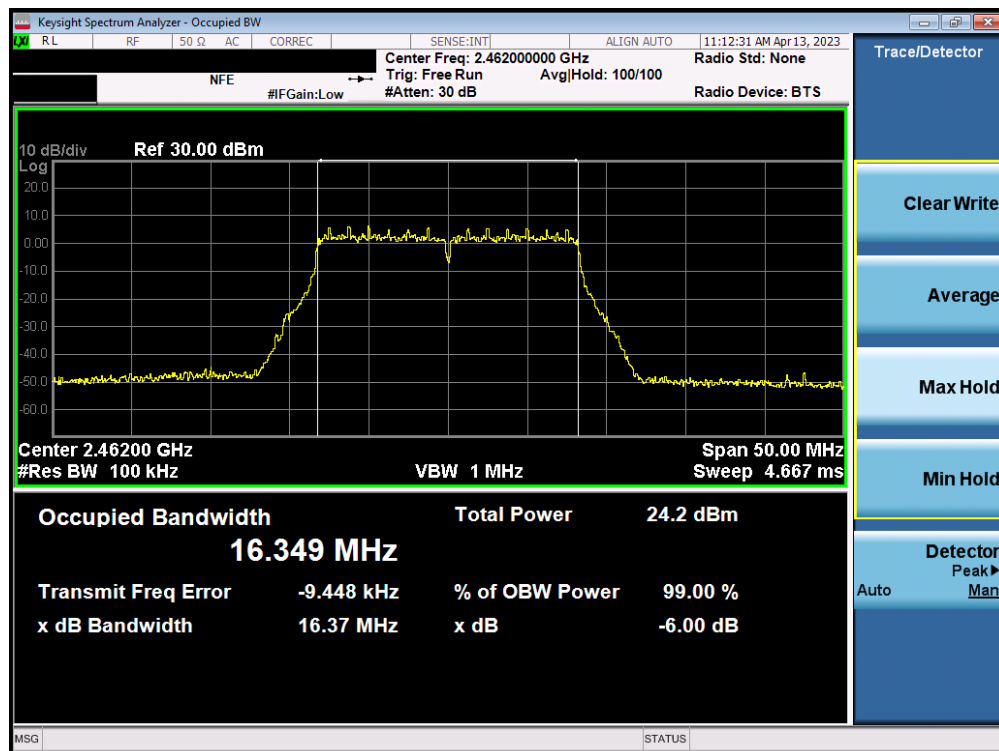


Plot 7-6. 6dB Bandwidth Plot SISO ANT2 (802.11g – Ch. 11)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 20 of 135

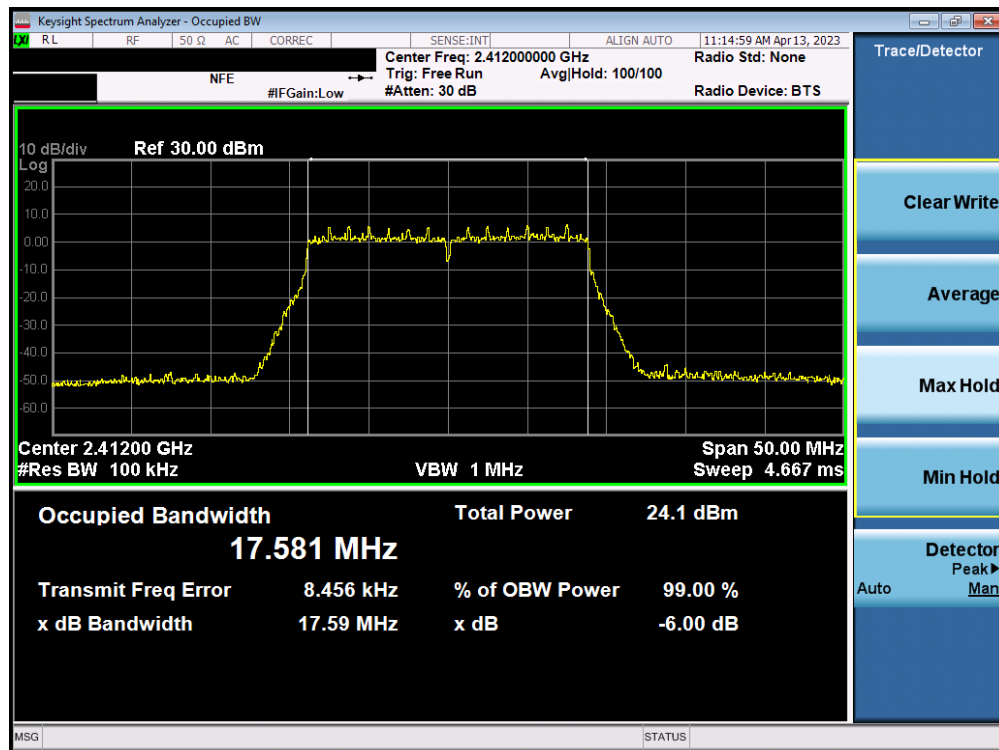


Plot 7-7. 6dB Bandwidth Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 1)

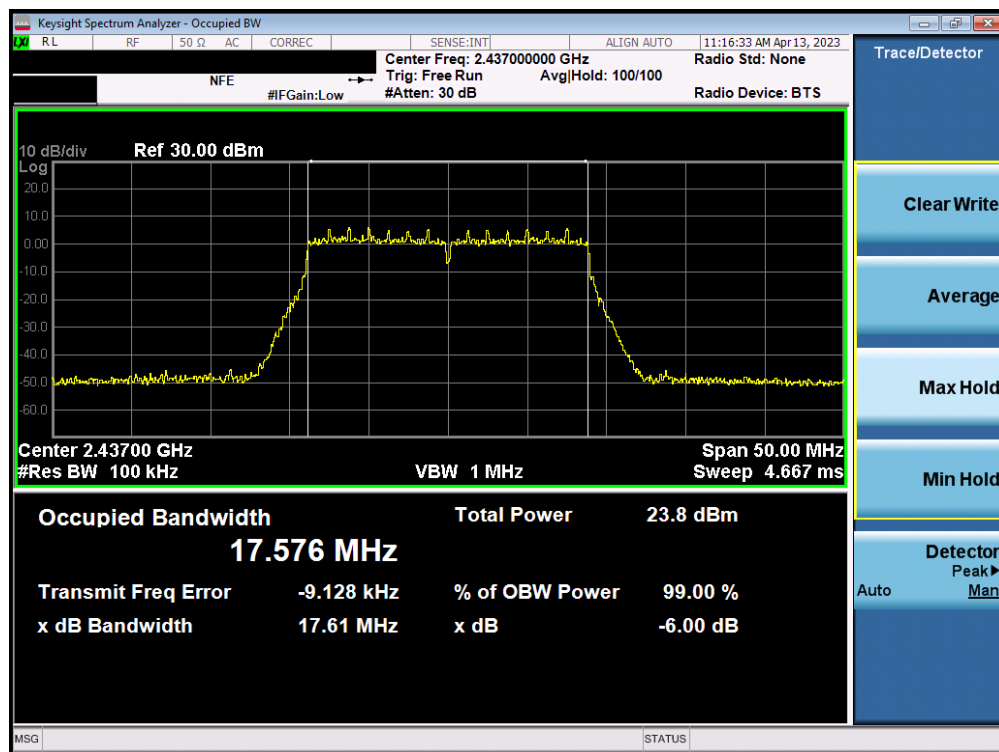


Plot 7-8. 6dB Bandwidth Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 6)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 21 of 135

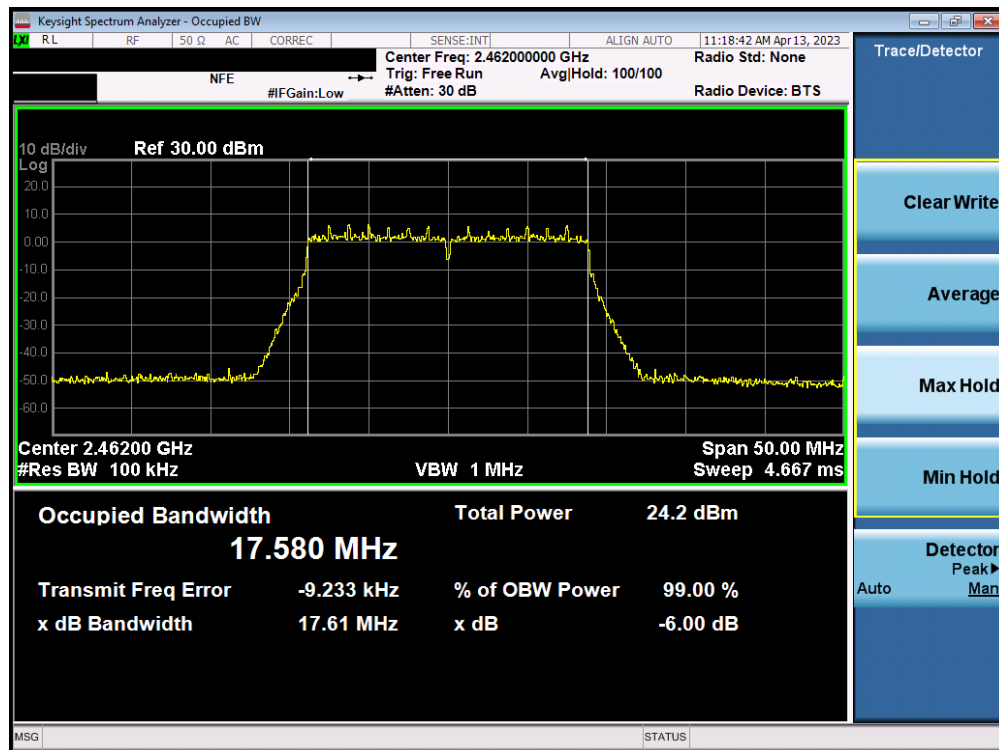


Plot 7-9. 6dB Bandwidth Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 11)

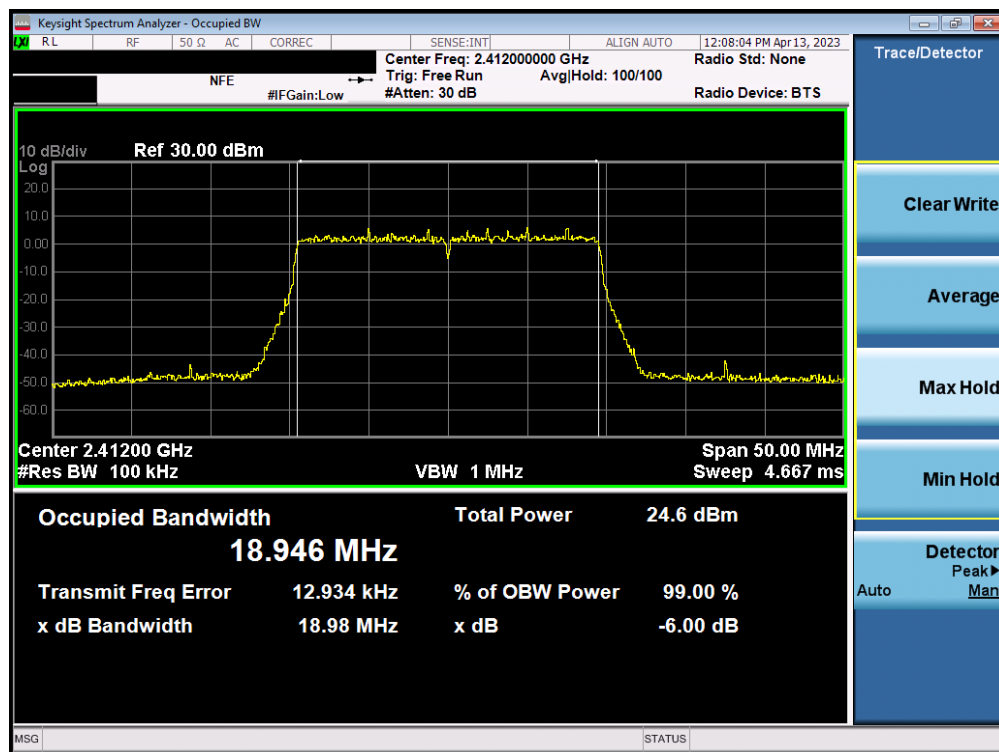


Plot 7-10. 6dB Bandwidth Plot SISO ANT2 (802.11ax (2.4GHz) – Ch. 1)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 22 of 135

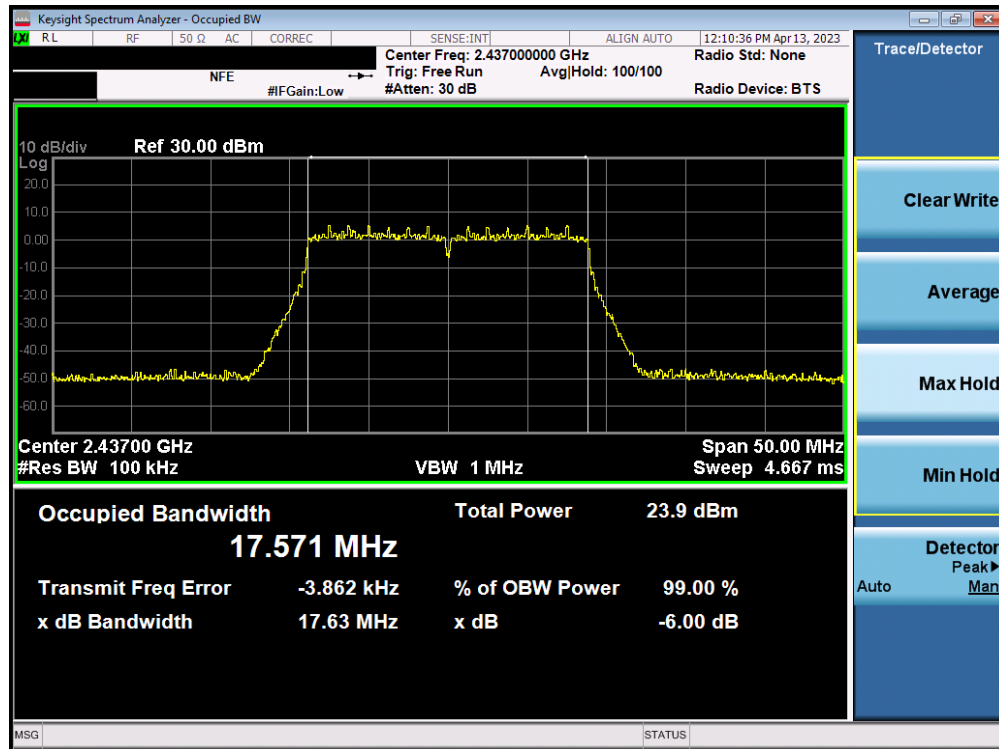

Plot 7-11. 6dB Bandwidth Plot SISO ANT2 (802.11ax (2.4GHz) – Ch. 6)

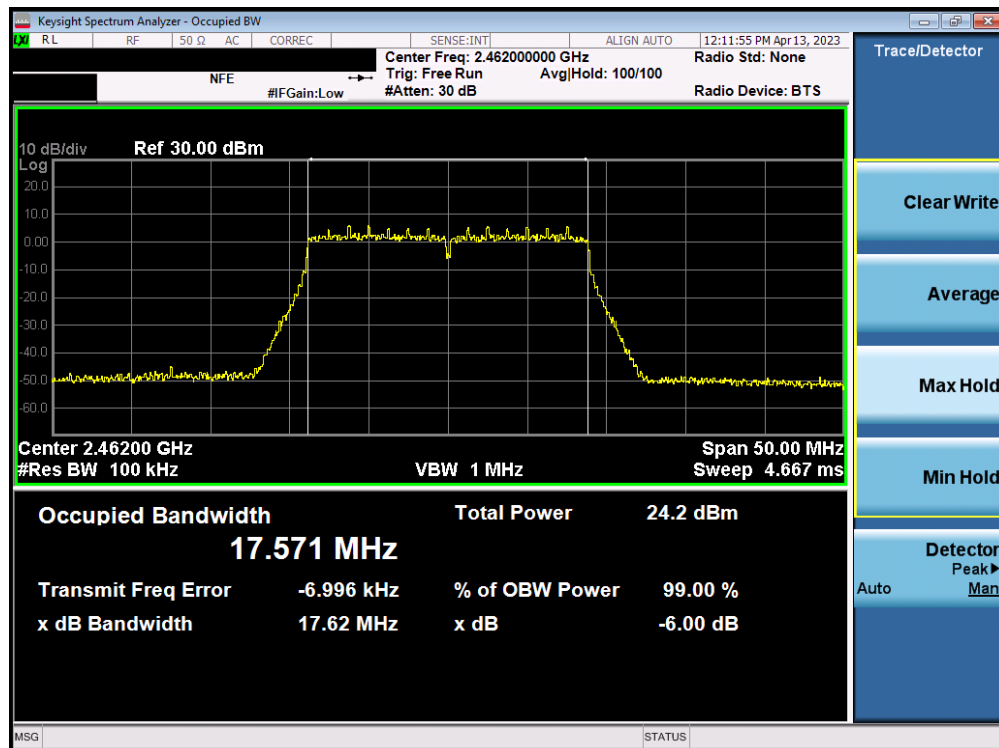

Plot 7-12. 6dB Bandwidth Plot SISO ANT2 (802.11ax (2.4GHz) – Ch. 11)


FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04-A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 23 of 135

7.2.2 MIMO Antenna-1 6dB Bandwidth Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
2412	1	b	1	9.087	0.500
2437	6	b	1	9.139	0.500
2462	11	b	1	9.133	0.500
2412	1	g	6	16.36	0.500
2437	6	g	6	16.37	0.500
2462	11	g	6	16.34	0.500
2412	1	n	6.5/7.2 (MCS0)	17.61	0.500
2437	6	n	6.5/7.2 (MCS0)	17.62	0.500
2462	11	n	6.5/7.2 (MCS0)	17.22	0.500
2412	1	ax	6.5/7.2 (MCS0)	18.87	0.500
2437	6	ax	6.5/7.2 (MCS0)	19.02	0.500
2462	11	ax	6.5/7.2 (MCS0)	18.83	0.500

Table 7-3. Conducted 6dB Bandwidth Measurements MIMO ANT1

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 24 of 135

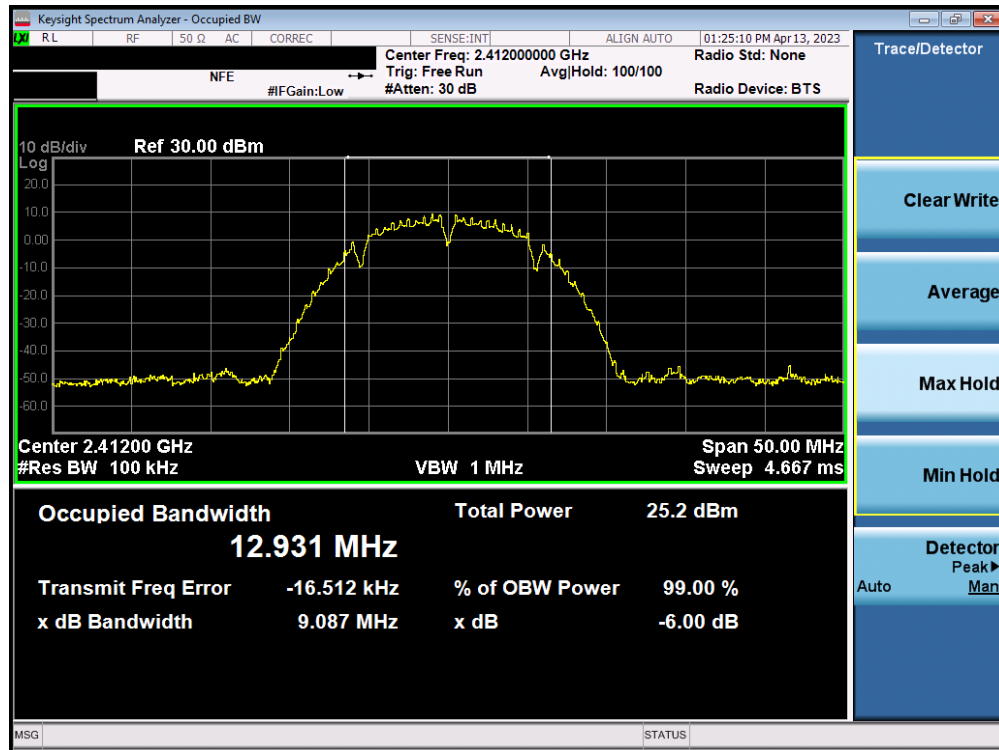


Plot 7-13. 6dB Bandwidth Plot MIMO ANT1 (802.11b – Ch. 1)

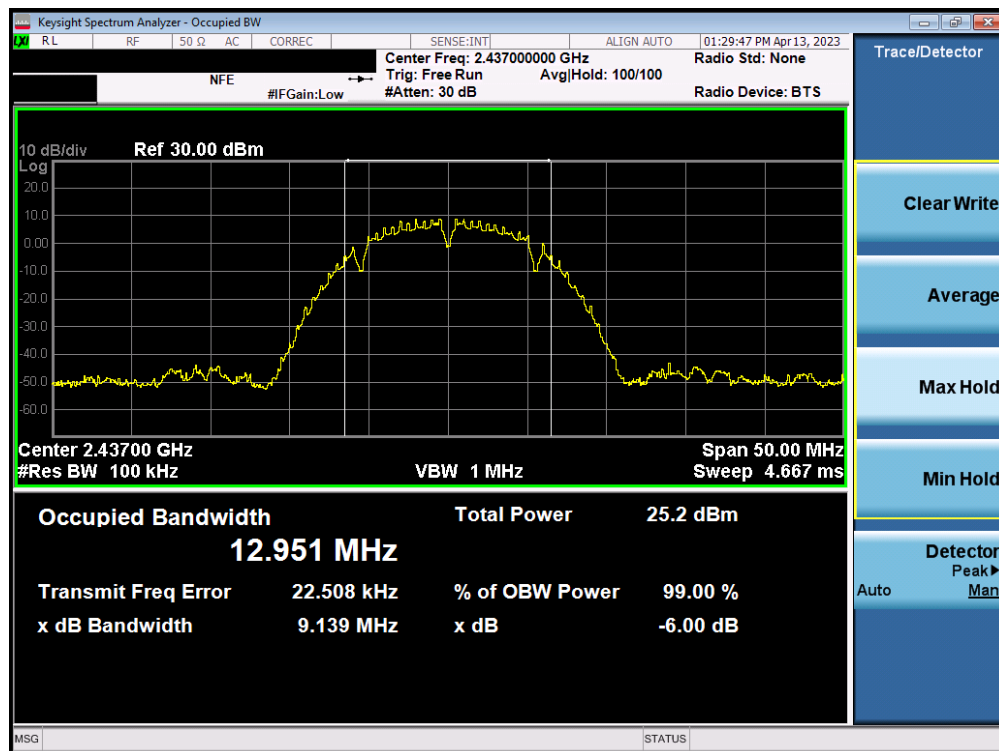


Plot 7-14. 6dB Bandwidth Plot MIMO ANT1 (802.11b – Ch. 6)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 25 of 135

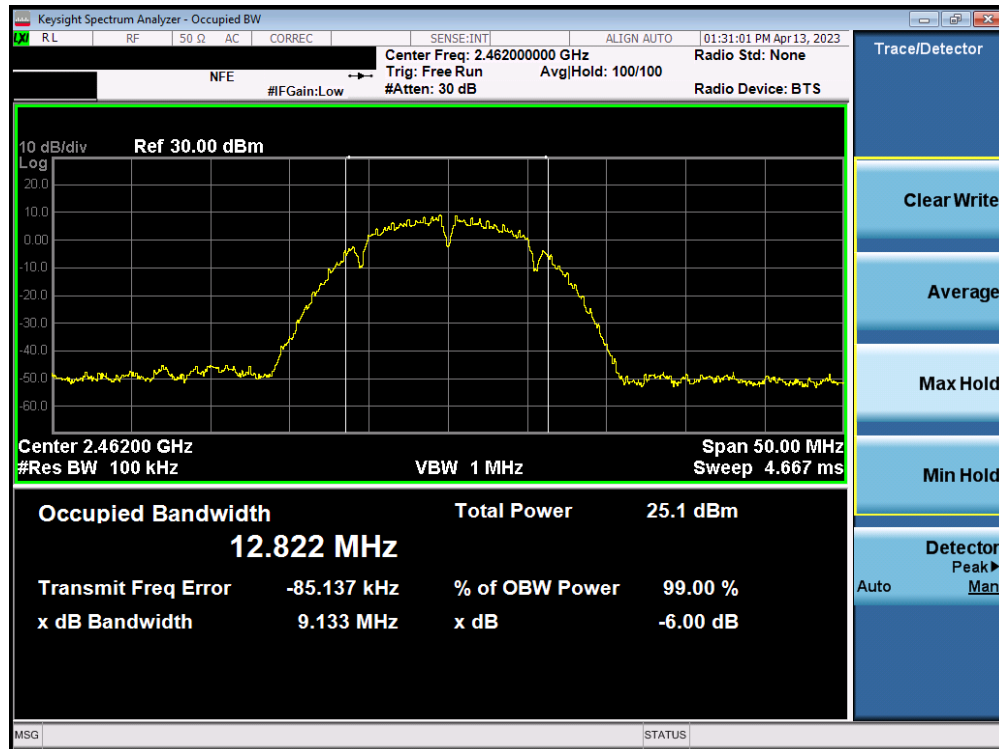


Plot 7-15. 6dB Bandwidth Plot MIMO ANT1 (802.11b – Ch. 11)

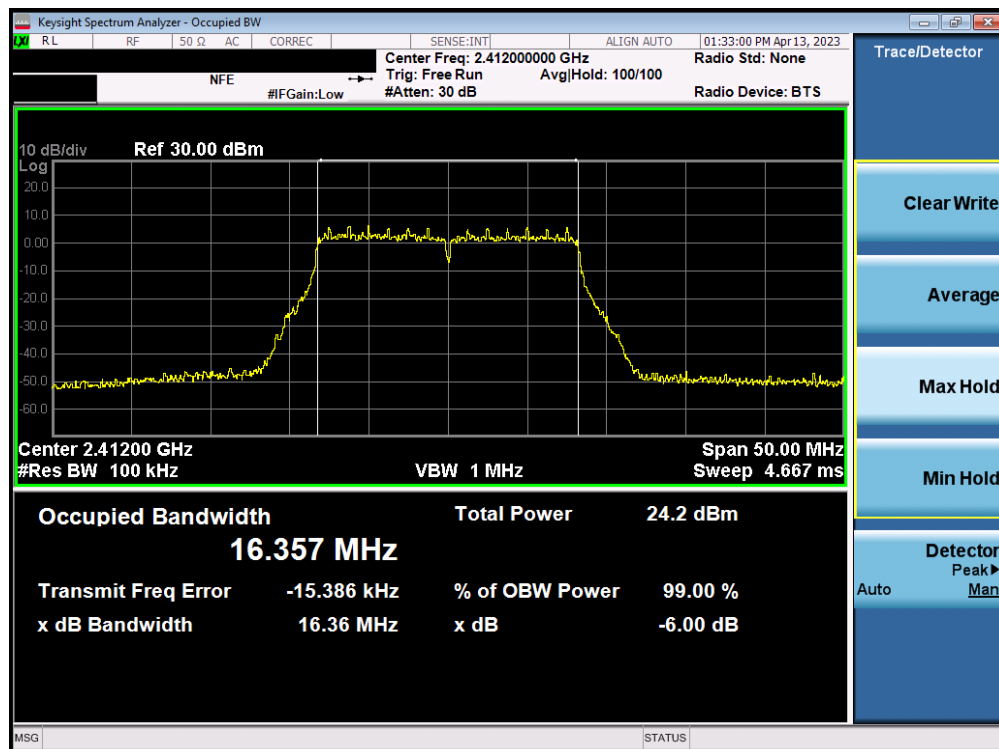


Plot 7-16. 6dB Bandwidth Plot MIMO ANT1 (802.11g – Ch. 1)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 26 of 135

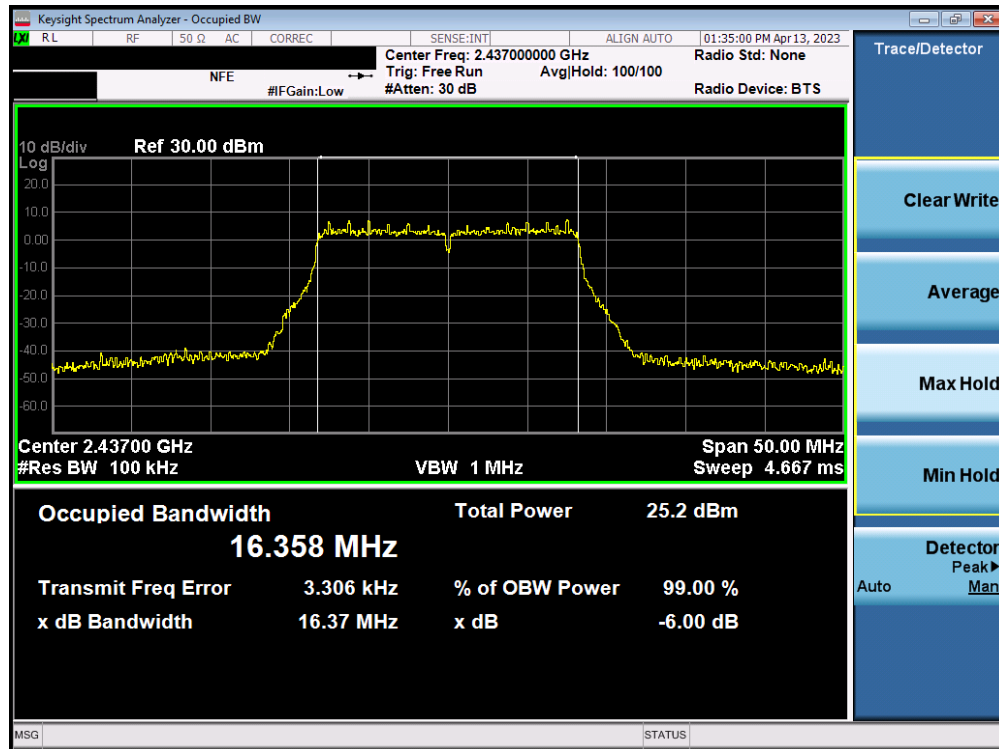


Plot 7-17. 6dB Bandwidth Plot MIMO ANT1 (802.11g – Ch. 6)

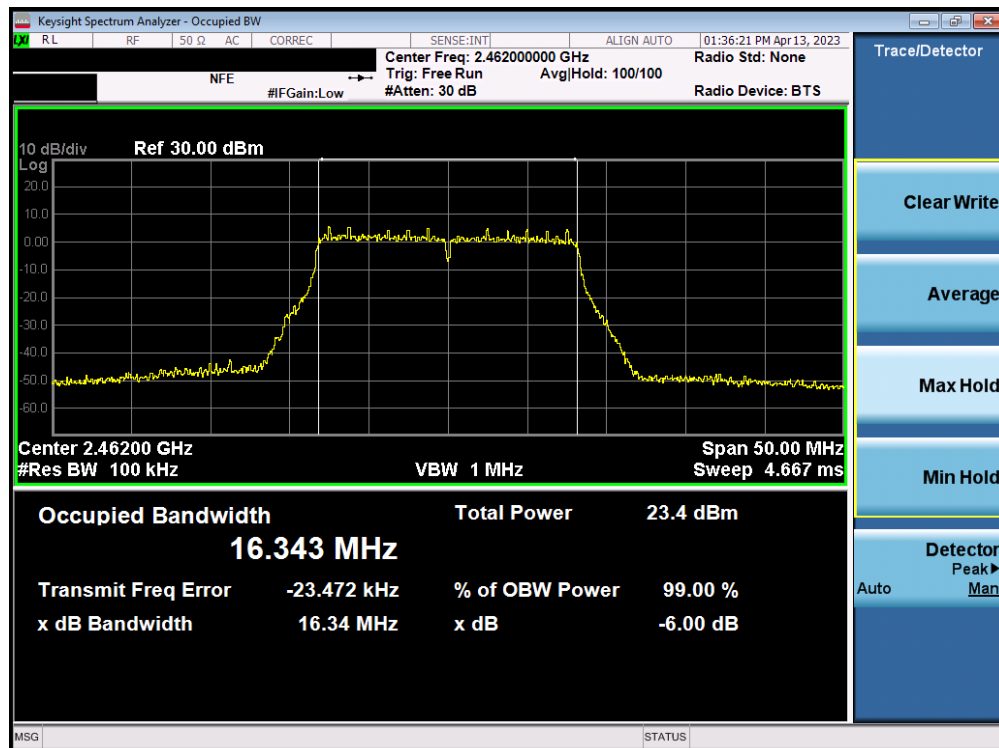


Plot 7-18. 6dB Bandwidth Plot MIMO ANT1 (802.11g – Ch. 11)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04-A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 27 of 135

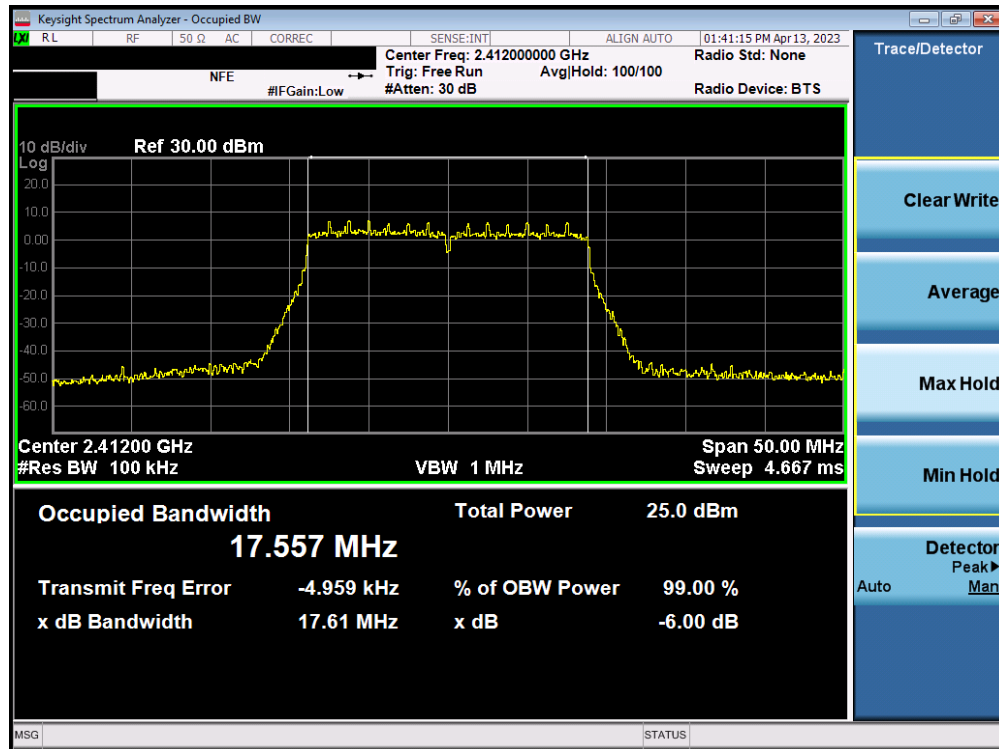


Plot 7-19. 6dB Bandwidth Plot MIMO ANT1 (802.11n (2.4GHz) – Ch. 1)

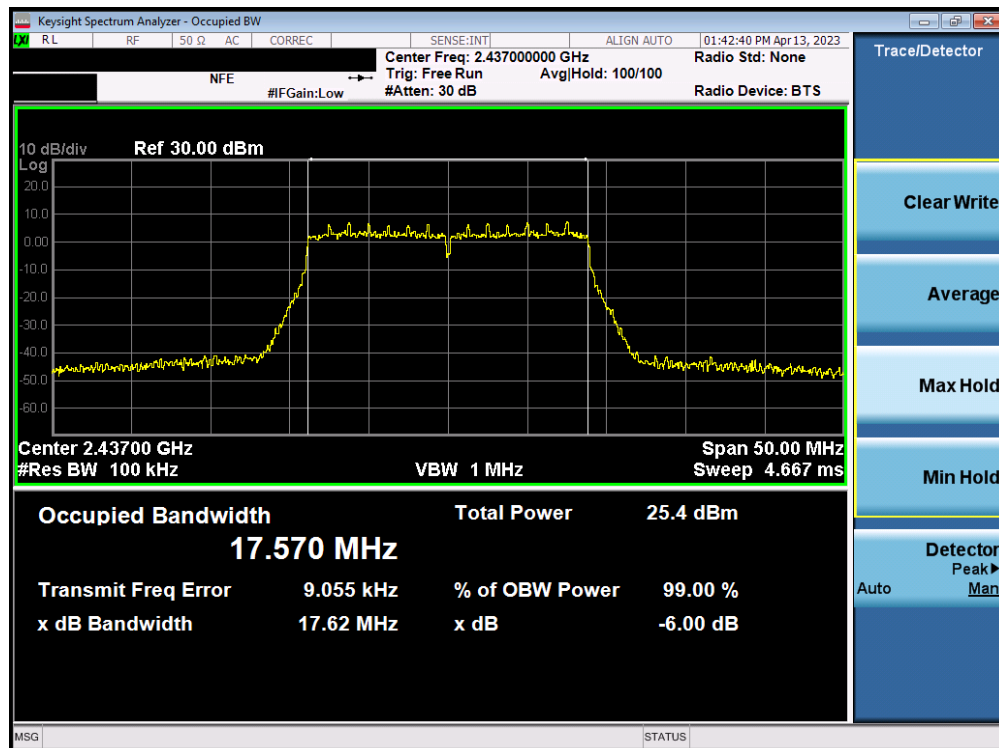


Plot 7-20. 6dB Bandwidth Plot MIMO ANT1 (802.11n (2.4GHz) – Ch. 6)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04-A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 28 of 135

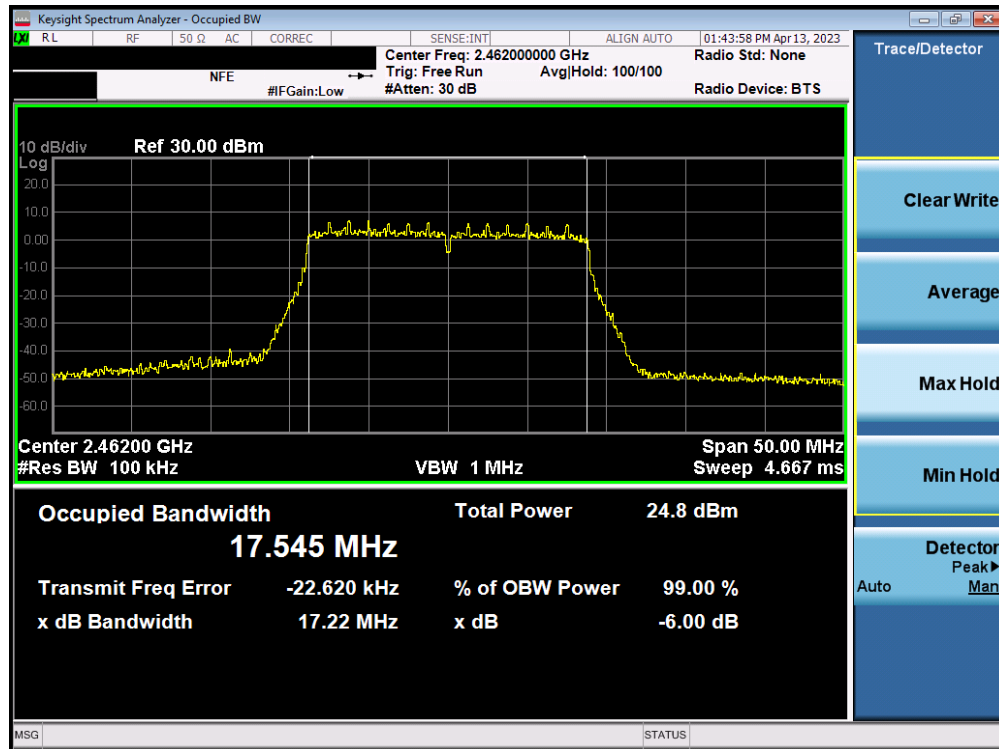


Plot 7-21. 6dB Bandwidth Plot MIMO ANT1 (802.11n (2.4GHz) – Ch. 11)

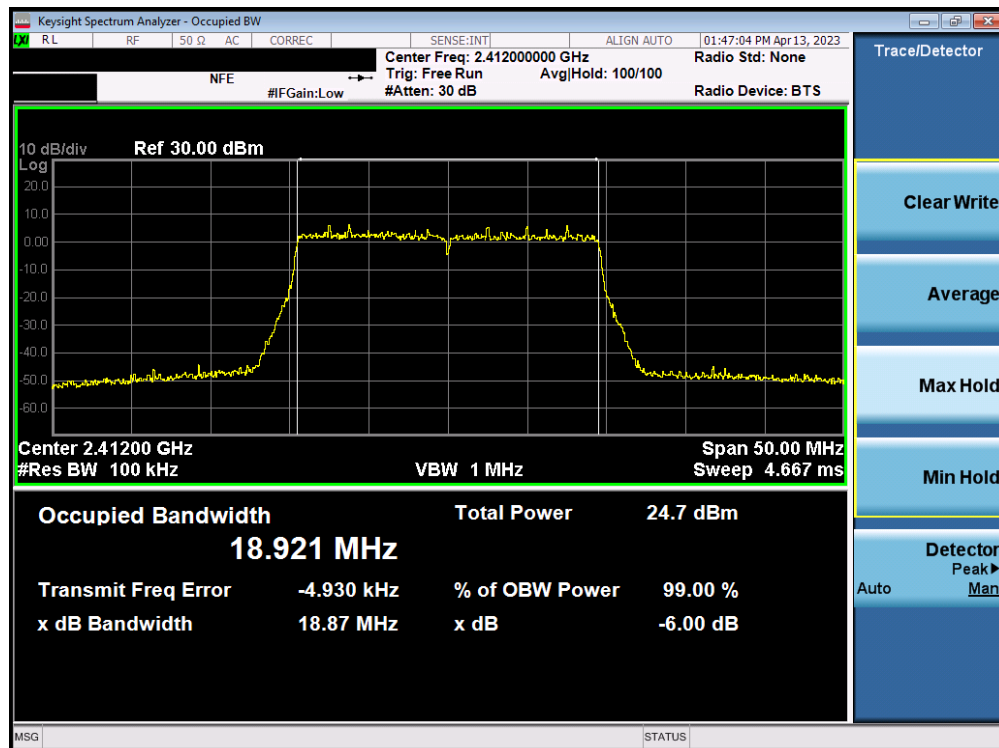


Plot 7-22. 6dB Bandwidth Plot MIMO ANT1 (802.11ax (2.4GHz) – Ch. 1)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04-A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 29 of 135

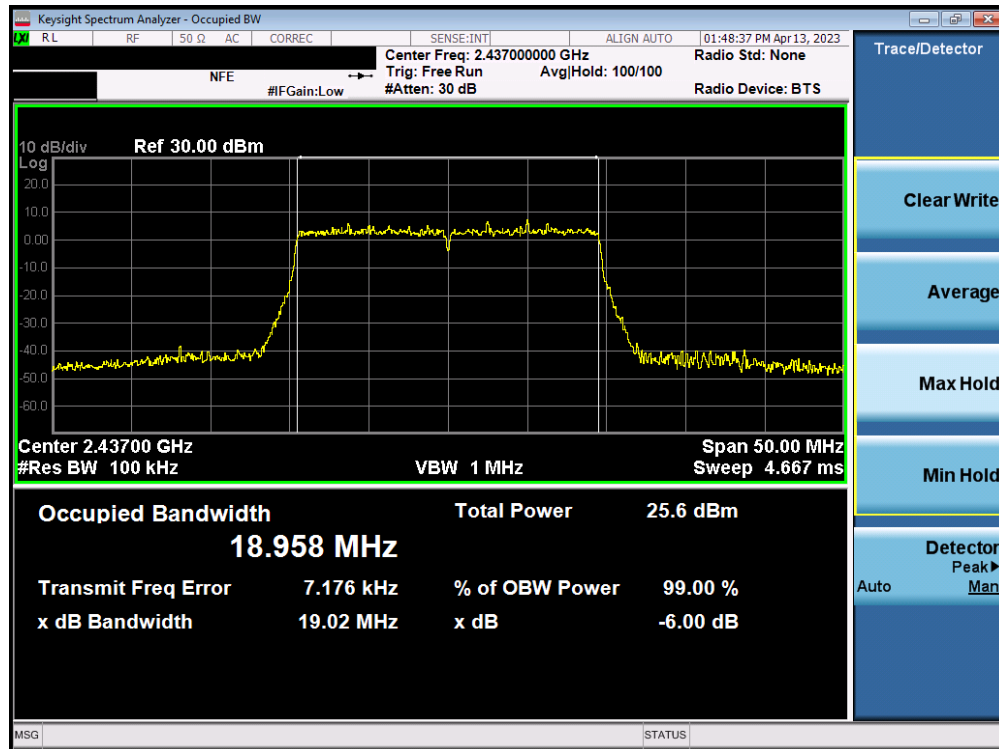

Plot 7-23. 6dB Bandwidth Plot MIMO ANT1 (802.11ax (2.4GHz) – Ch. 6)

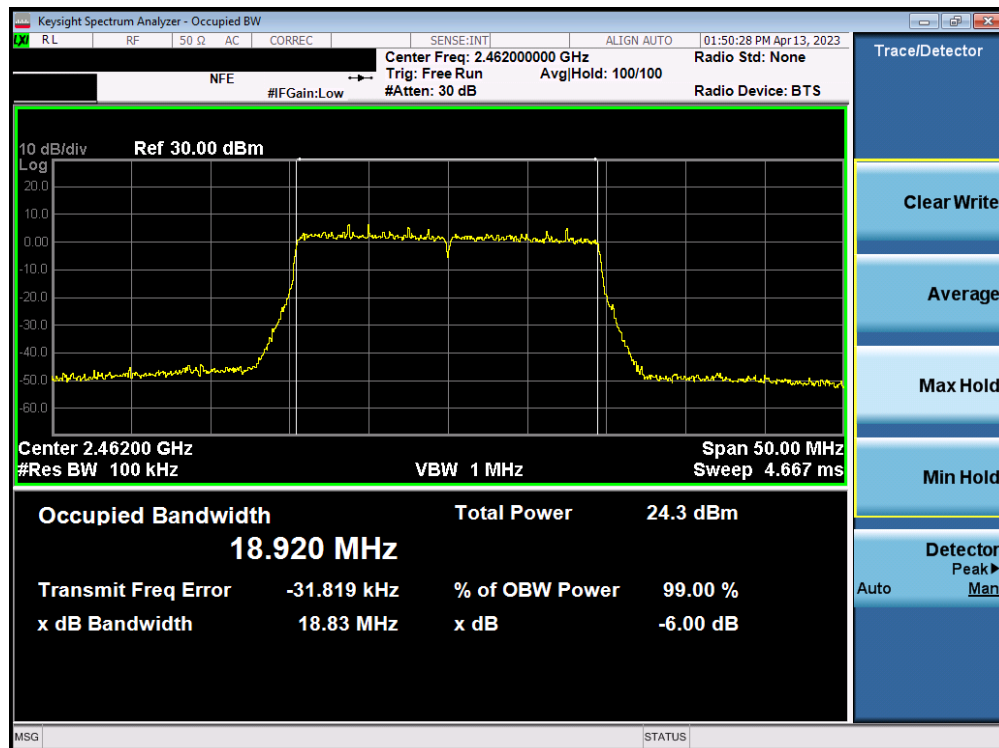

Plot 7-24. 6dB Bandwidth Plot MIMO ANT1 (802.11ax (2.4GHz) – Ch. 11)


FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04-A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 30 of 135

7.2.3 MIMO Antenna-2 6dB Bandwidth Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
2412	1	b	1	9.141	0.500
2437	6	b	1	9.147	0.500
2462	11	b	1	9.588	0.500
2412	1	g	6	16.36	0.500
2437	6	g	6	16.37	0.500
2462	11	g	6	16.36	0.500
2412	1	n	6.5/7.2 (MCS0)	17.62	0.500
2437	6	n	6.5/7.2 (MCS0)	17.62	0.500
2462	11	n	6.5/7.2 (MCS0)	17.61	0.500
2412	1	ax	6.5/7.2 (MCS0)	18.90	0.500
2437	6	ax	6.5/7.2 (MCS0)	18.85	0.500
2462	11	ax	6.5/7.2 (MCS0)	18.96	0.500

Table 7-4. Conducted 6dB Bandwidth Measurements MIMO ANT2

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 31 of 135

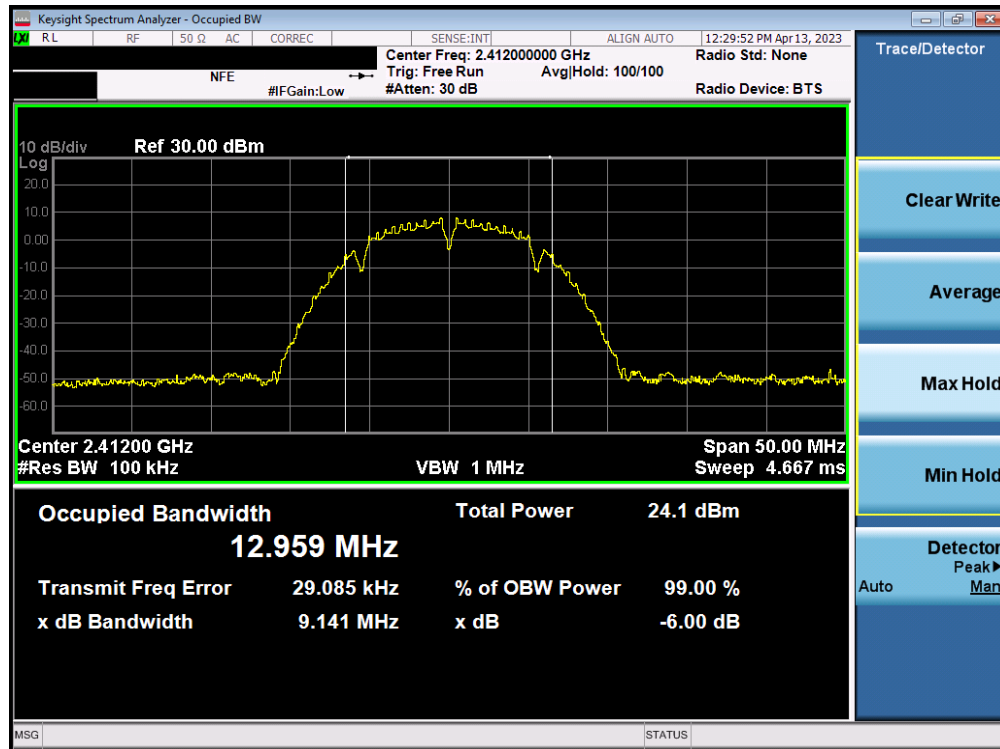


Plot 7-25. 6dB Bandwidth Plot MIMO ANT2 (802.11b – Ch. 1)

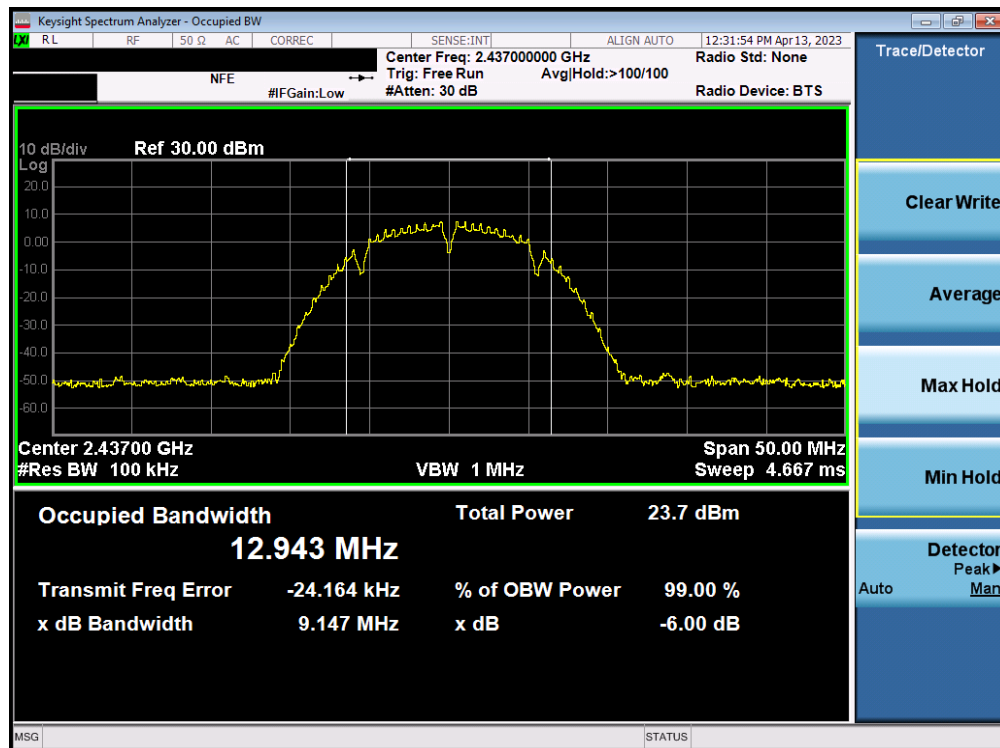


Plot 7-26. 6dB Bandwidth Plot MIMO ANT2 (802.11b – Ch. 6)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 32 of 135

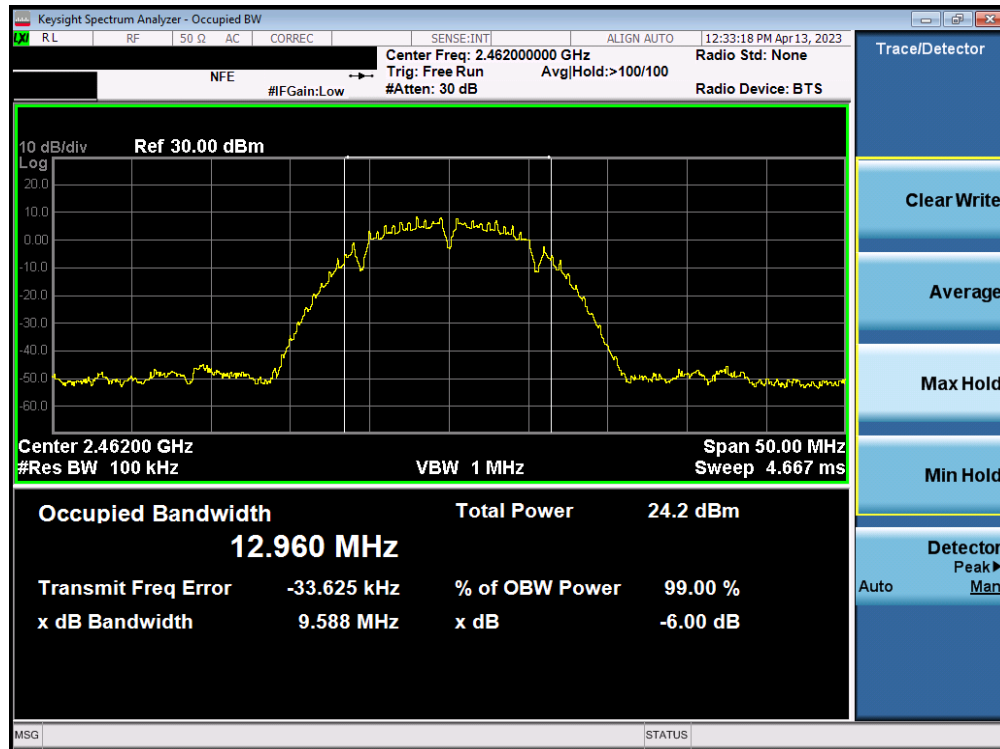


Plot 7-27. 6dB Bandwidth Plot MIMO ANT2 (802.11b – Ch. 11)

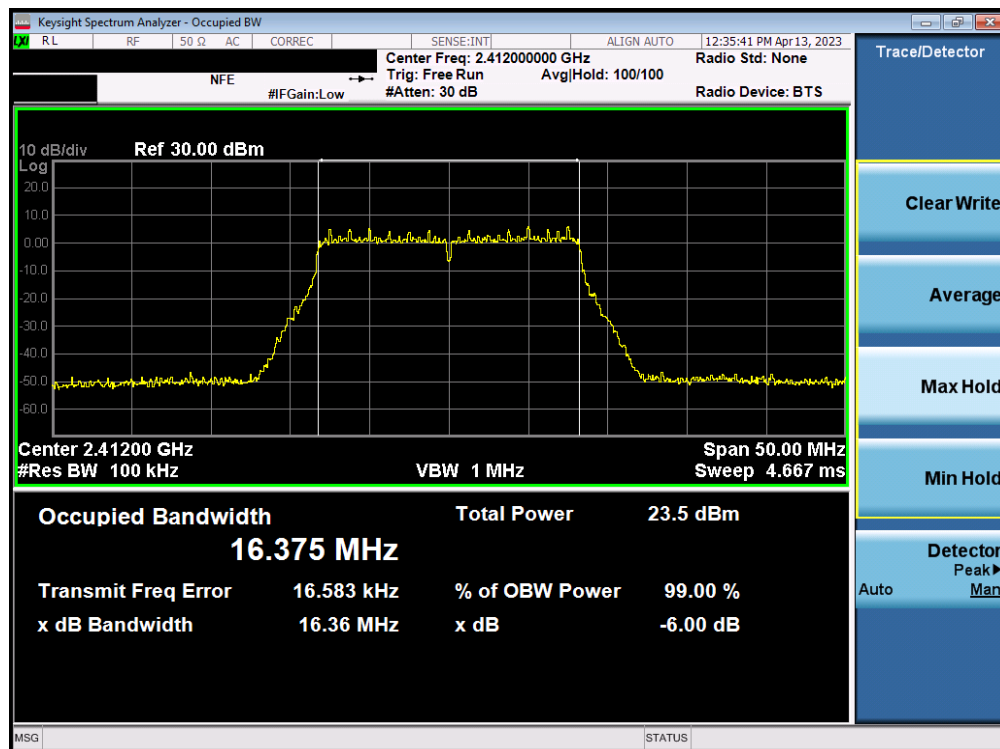


Plot 7-28. 6dB Bandwidth Plot MIMO ANT2 (802.11g – Ch. 1)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 33 of 135

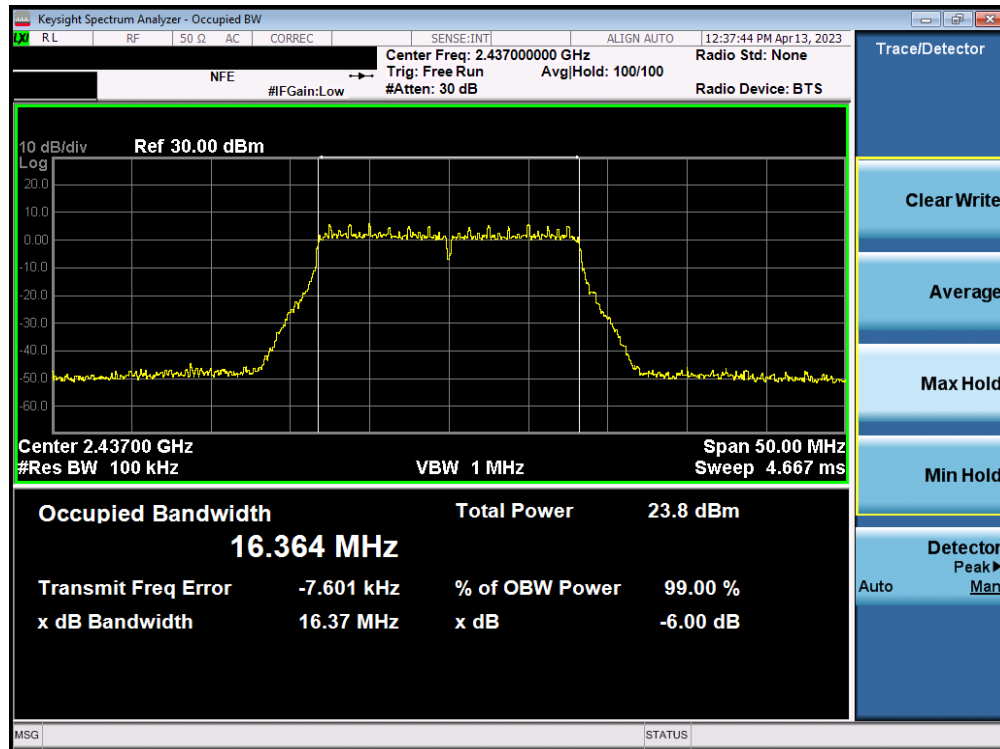


Plot 7-29. 6dB Bandwidth Plot MIMO ANT2 (802.11g – Ch. 6)

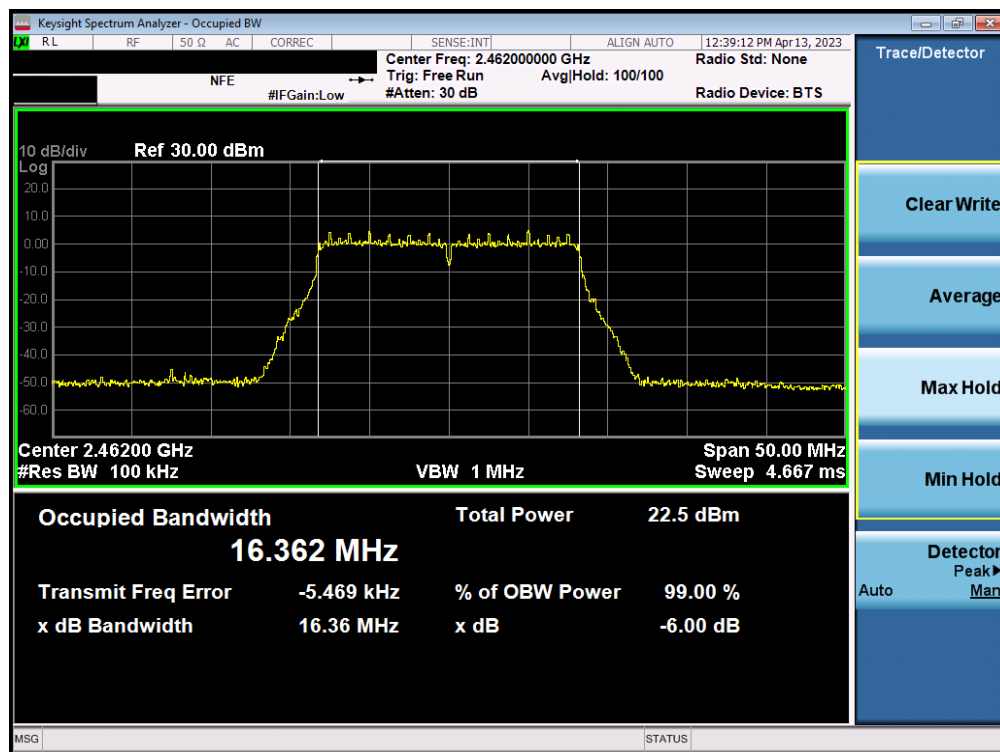


Plot 7-30. 6dB Bandwidth Plot MIMO ANT2 (802.11g – Ch. 11)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 34 of 135

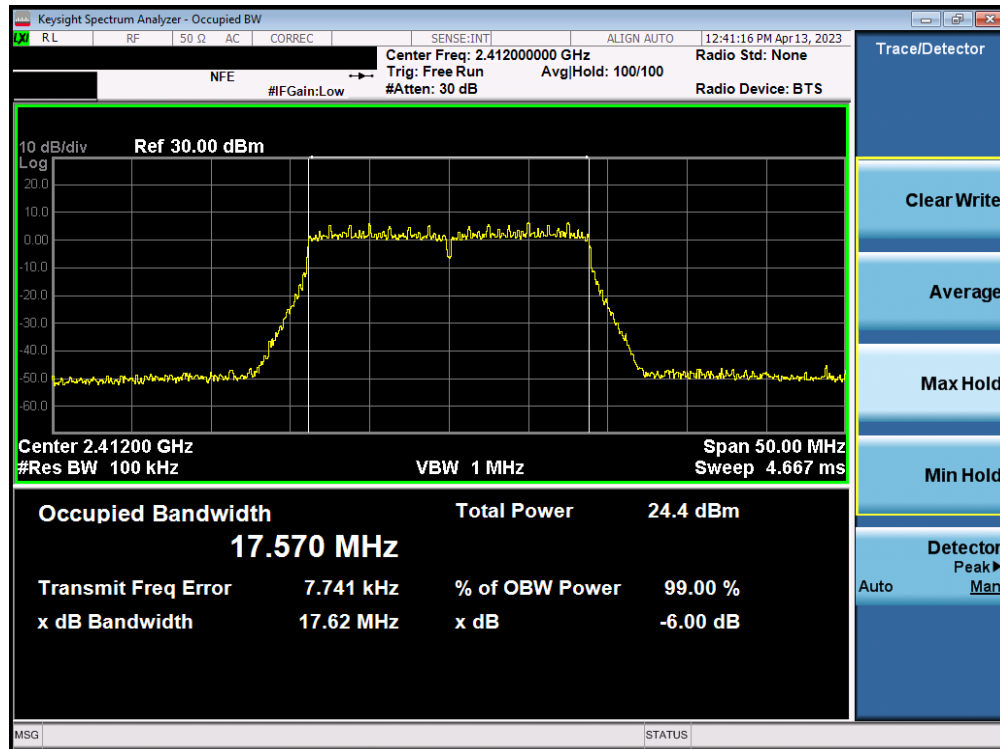


Plot 7-31. 6dB Bandwidth Plot MIMO ANT2 (802.11n (2.4GHz) – Ch. 1)

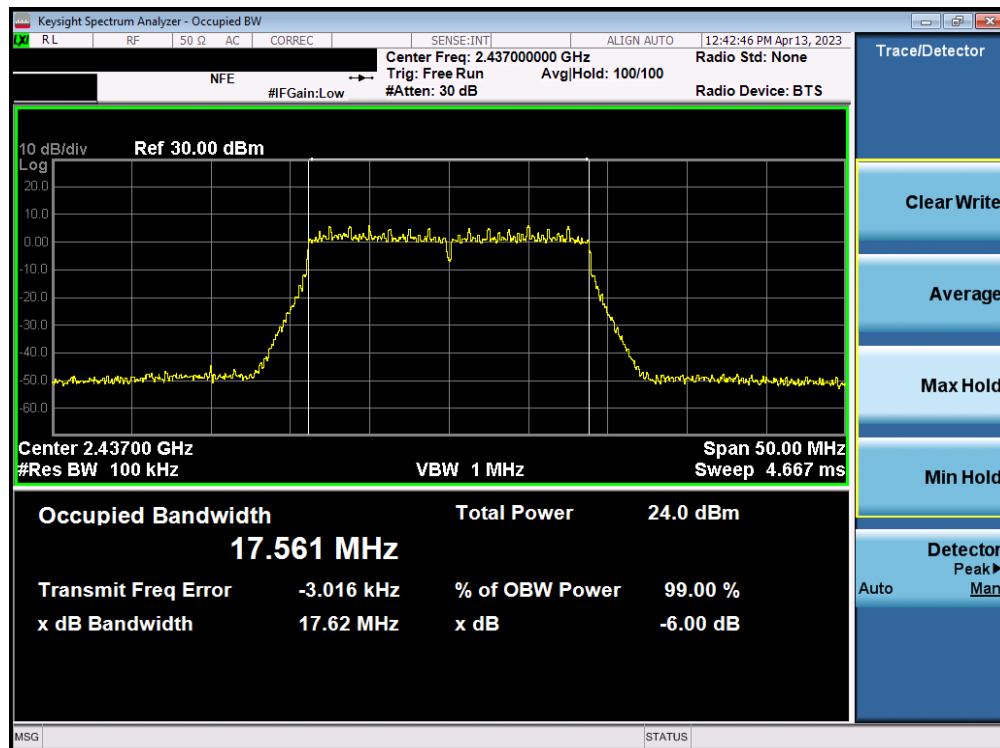


Plot 7-32. 6dB Bandwidth Plot MIMO ANT2 (802.11n (2.4GHz) – Ch. 6)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 35 of 135

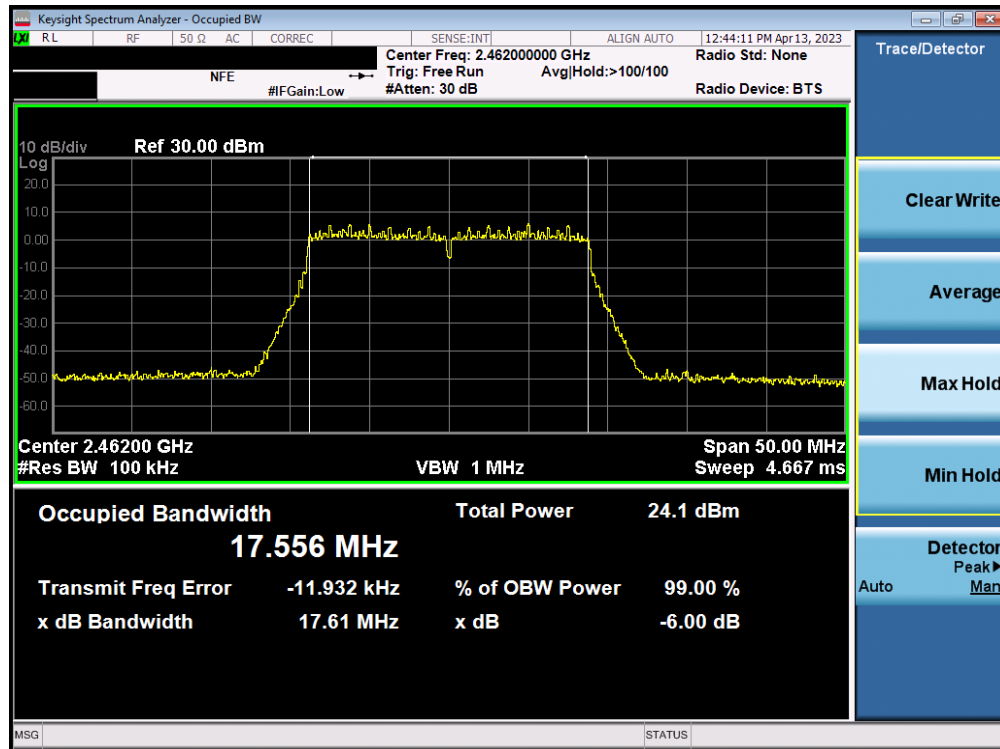


Plot 7-33. 6dB Bandwidth Plot MIMO ANT2 (802.11n (2.4GHz) – Ch. 11)

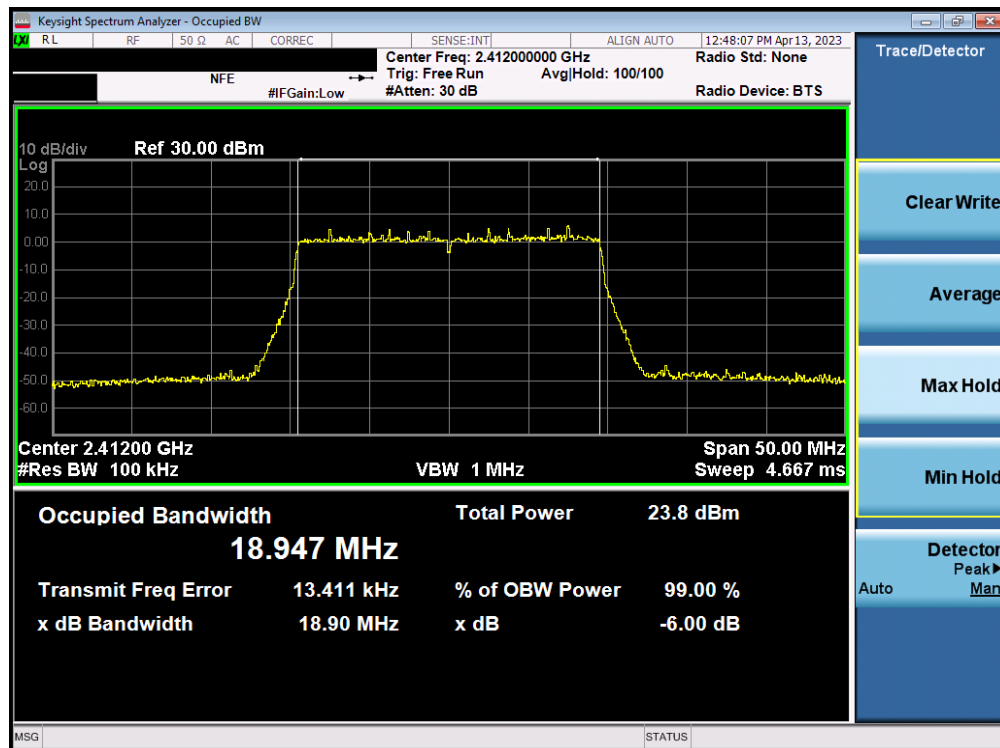


Plot 7-34. 6dB Bandwidth Plot MIMO ANT2 (802.11ax (2.4GHz) – Ch. 1)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 36 of 135

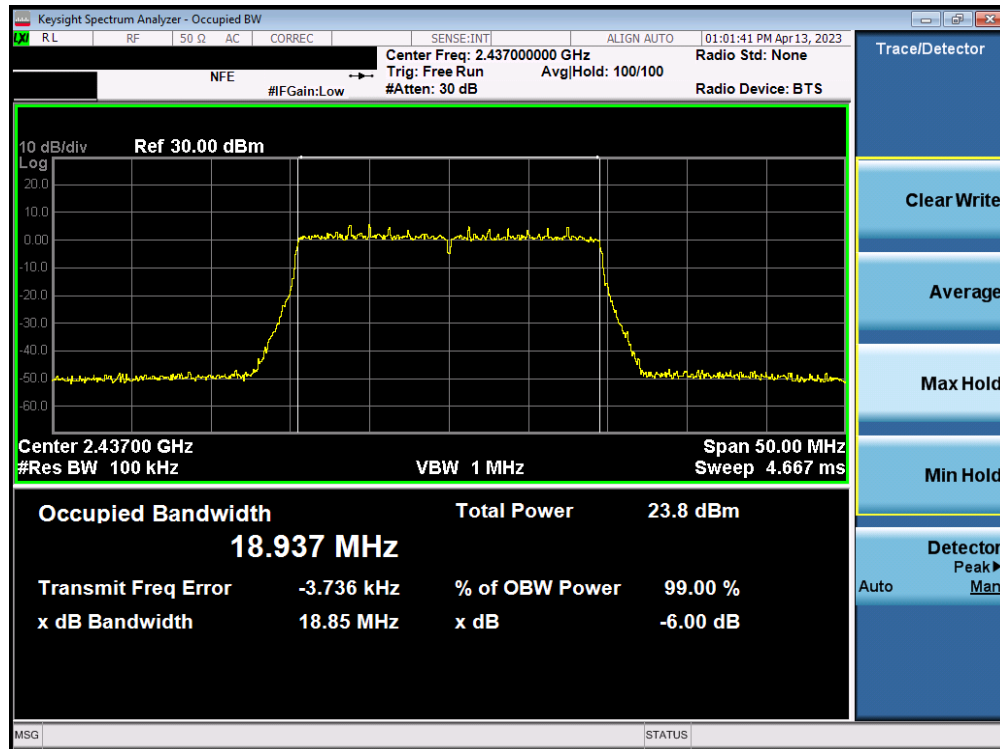

Plot 7-35. 6dB Bandwidth Plot MIMO ANT2 (802.11ax (2.4GHz) – Ch. 6)

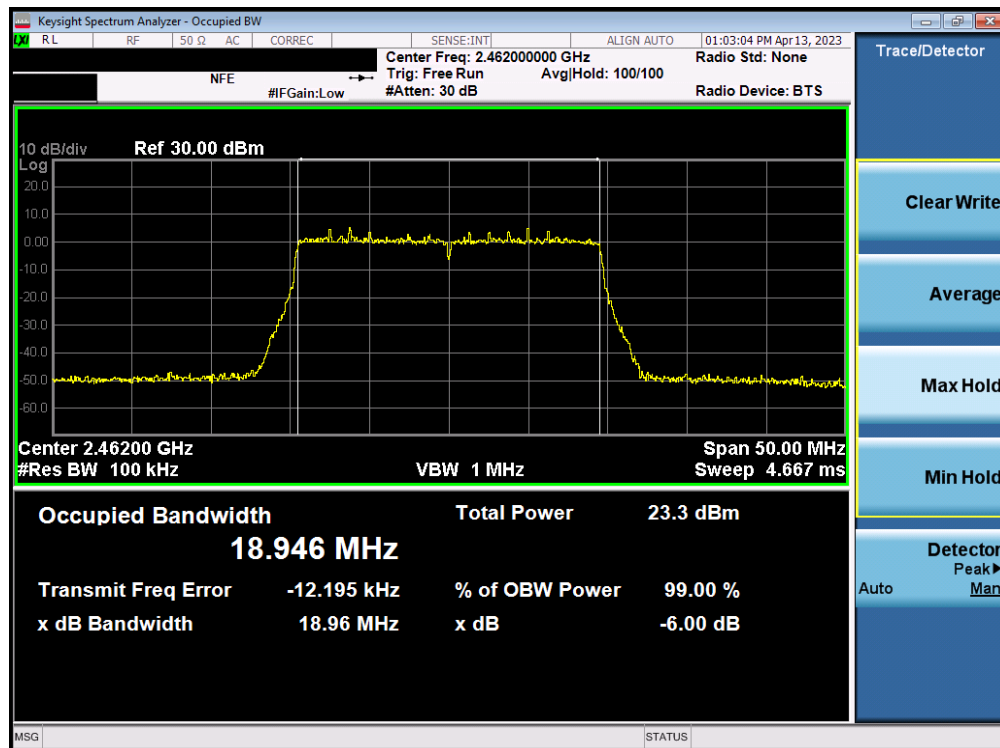

Plot 7-36. 6dB Bandwidth Plot MIMO ANT2 (802.11ax (2.4GHz) – Ch. 11)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 37 of 135

7.3 Output Power Measurement

Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

The maximum e.i.r.p. shall not exceed 4 Watts.

Test Procedure Used

ANSI C63.10-2013 – Section 11.9.1.3 PKPM1 Peak Power Method
 KDB 558074 D01 v05r02 – Section 8.3.1.3 PKPM1 Peak-reading Power Meter Method
 ANSI C63.10-2013 – Section 11.9.2.3.2 Method AVGPM-G
 KDB 558074 D01 v05r02 – Section 8.3.2.3 Measurement using a Power Meter (PM)
 ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique
 KDB 662911 D01 v02r01 – Section E1) Measure-and-Sum Technique

Test Settings

Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.



Figure 7-2. Test Instrument & Measurement Setup for Power Meter Measurements

Test Notes

None.

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04-A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 38 of 135

2.4GHz	Freq [MHz]	Channel	Detector	IEEE Transmission Mode				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11b	802.11g	802.11n	802.11ax						
	2412	1	AVG	18.66	16.78	17.82	16.63	30.00	-11.34	-5.83	12.83	36.02	-23.19
			PEAK	22.21	22.65	23.29	22.95	30.00	-6.71	-5.83	17.46	36.02	-18.56
	2417	2	AVG		17.35		17.33	30.00	-12.65	-5.83	11.52	36.02	-24.50
			PEAK		22.58		23.51	30.00	-7.42	-5.83	16.75	36.02	-19.27
	2437	6	AVG	18.60	17.65	17.61	17.49	30.00	-11.40	-5.83	12.77	36.02	-23.25
			PEAK	22.15	22.78	23.08	23.65	30.00	-6.92	-5.83	17.25	36.02	-18.77
	2457	10	AVG		17.51	17.48	17.40	30.00	-12.49	-5.83	11.68	36.02	-24.34
			PEAK		22.58	22.99	23.28	30.00	-7.01	-5.83	17.16	36.02	-18.86
2.4GHz	2462	11	AVG	18.95	15.73	16.95	16.27	30.00	-11.05	-5.83	13.12	36.02	-22.90
			PEAK	22.35	21.19	22.39	22.41	30.00	-7.61	-5.83	16.56	36.02	-19.46
	2467	12	AVG	8.81	8.56	8.63	8.59	30.00	-21.19	-5.83	2.98	36.02	-33.04
			PEAK	13.13	14.18	14.14	14.77	30.00	-15.82	-5.83	8.35	36.02	-27.67
	2472	13	AVG	2.84	2.71	2.64	2.53	30.00	-27.16	-5.83	-2.99	36.02	-39.01
			PEAK	6.65	8.18	8.16	8.66	30.00	-21.82	-5.83	2.35	36.02	-33.67

Table 7-5. Conducted Output Power Measurements SISO ANT2

2.4GHz	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
	2412	1	AVG	18.64	18.97	21.82	30.00	-8.18	-2.86	18.96	36.02	-17.06
			PEAK	21.94	22.35	25.16	30.00	-4.84	-2.86	22.30	36.02	-13.72
	2437	6	AVG	18.89	18.24	21.59	30.00	-8.41	-2.86	18.73	36.02	-17.29
			PEAK	22.47	22.02	25.26	30.00	-4.74	-2.86	22.40	36.02	-13.62
	2462	11	AVG	18.98	18.80	21.90	30.00	-8.10	-2.86	19.04	36.02	-16.98
			PEAK	22.24	22.15	25.21	30.00	-4.79	-2.86	22.35	36.02	-13.67
	2467	12	AVG	5.61	5.55	8.59	30.00	-21.41	-2.86	5.73	36.02	-30.29
			PEAK	9.49	9.54	12.53	30.00	-17.47	-2.86	9.67	36.02	-26.35
2.4GHz	2472	13	AVG	-0.50	-0.24	2.64	30.00	-27.36	-2.86	-0.22	36.02	-36.24
			PEAK	3.14	3.77	6.48	30.00	-23.52	-2.86	3.62	36.02	-32.40

Table 7-6. Conducted Output Power Measurements MIMO (802.11b)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 39 of 135

2.4GHZ	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
	2412	1	AVG	16.84	16.64	19.75	30.00	-10.25	-2.86	16.89	36.02	-19.13
			PEAK	22.46	22.35	25.42	30.00	-4.58	-2.86	22.56	36.02	-13.46
	2417	2	AVG	17.80	17.80	20.81	30.00	-9.19	-2.86	17.95	36.02	-18.07
			PEAK	23.42	23.38	26.41	30.00	-3.59	-2.86	23.55	36.02	-12.47
	2437	6	AVG	18.17	17.49	20.85	30.00	-9.15	-2.86	17.99	36.02	-18.03
			PEAK	23.61	22.95	26.30	30.00	-3.70	-2.86	23.44	36.02	-12.58
	2457	10	AVG	18.02	17.83	20.94	30.00	-9.06	-2.86	18.08	36.02	-17.94
			PEAK	23.56	23.44	26.51	30.00	-3.49	-2.86	23.65	36.02	-12.37
	2462	11	AVG	16.23	15.72	18.99	30.00	-11.01	-2.86	16.13	36.02	-19.89
			PEAK	21.83	21.39	24.63	30.00	-5.37	-2.86	21.77	36.02	-14.25
	2467	12	AVG	5.73	5.25	8.51	30.00	-21.49	-2.86	5.65	36.02	-30.37
			PEAK	10.51	10.36	13.45	30.00	-16.55	-2.86	10.59	36.02	-25.43
	2472	13	AVG	-0.12	-0.39	2.76	30.00	-27.24	-2.86	-0.10	36.02	-36.12
			PEAK	5.44	5.34	8.40	30.00	-21.60	-2.86	5.54	36.02	-30.48

Table 7-7. Conducted Output Power Measurements MIMO (802.11g)

2.4GHZ	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
	2412	1	AVG	17.83	17.92	20.89	30.00	-9.11	-2.86	18.03	36.02	-17.99
			PEAK	23.42	23.44	26.44	30.00	-3.56	-2.86	23.58	36.02	-12.44
	2437	6	AVG	18.23	17.52	20.90	30.00	-9.10	-2.86	18.04	36.02	-17.98
			PEAK	23.05	23.18	26.13	30.00	-3.87	-2.86	23.27	36.02	-12.75
	2457	10	AVG	18.05	17.84	20.96	30.00	-9.04	-2.86	18.10	36.02	-17.92
			PEAK	23.46	23.31	26.40	30.00	-3.60	-2.86	23.54	36.02	-12.48
	2462	11	AVG	17.24	16.79	20.03	30.00	-9.97	-2.86	17.17	36.02	-18.85
			PEAK	22.57	22.34	25.47	30.00	-4.53	-2.86	22.61	36.02	-13.41
	2467	12	AVG	5.72	5.40	8.57	30.00	-21.43	-2.86	5.71	36.02	-30.31
			PEAK	10.94	10.37	13.67	30.00	-16.33	-2.86	10.81	36.02	-25.21
	2472	13	AVG	-0.20	-0.34	2.74	30.00	-27.26	-2.86	-0.12	36.02	-36.14
			PEAK	5.26	5.12	8.20	30.00	-21.80	-2.86	5.34	36.02	-30.68

Table 7-8. Conducted Output Power Measurements MIMO (802.11n)

2.4GHZ	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO						
	2412	1	AVG	16.62	16.65	19.65	30.00	-10.35	-2.86	16.79	36.02	-19.23
			PEAK	22.84	22.71	25.79	30.00	-4.21	-2.86	22.93	36.02	-13.09
	2417	2	AVG	17.80	17.71	20.77	30.00	-9.23	-2.86	17.91	36.02	-18.11
			PEAK	23.38	23.80	26.61	30.00	-3.39	-2.86	23.75	36.02	-12.27
	2437	6	AVG	18.10	17.49	20.82	30.00	-9.18	-2.86	17.96	36.02	-18.06
			PEAK	23.71	23.47	26.60	30.00	-3.40	-2.86	23.74	36.02	-12.28
	2457	10	AVG	17.87	17.57	20.73	30.00	-9.27	-2.86	17.87	36.02	-18.15
			PEAK	23.49	23.56	26.54	30.00	-3.46	-2.86	23.68	36.02	-12.34
	2462	11	AVG	16.39	16.25	19.33	30.00	-10.67	-2.86	16.47	36.02	-19.55
			PEAK	22.55	22.36	25.47	30.00	-4.53	-2.86	22.61	36.02	-13.41
	2467	12	AVG	5.67	5.34	8.52	30.00	-21.48	-2.86	5.66	36.02	-30.36
			PEAK	11.83	11.31	14.59	30.00	-15.41	-2.86	11.73	36.02	-24.29
	2472	13	AVG	-0.21	-0.62	2.60	30.00	-27.40	-2.86	-0.26	36.02	-36.28
			PEAK	6.27	5.88	9.09	30.00	-20.91	-2.86	6.23	36.02	-29.79

Table 7-9. Conducted Output Power Measurements MIMO (802.11ax)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 40 of 135



Note:

Per ANSI C63.10-2013 Section 14.2, the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

At 2412MHz the average conducted output power was measured to be 18.64 dBm for Antenna 1 and 18.97 dBm for Antenna 2.

Antenna 1 + Antenna 2 = MIMO

$$(18.64 \text{ dBm} + 18.97 \text{ dBm}) = (73.11 \text{ mW} + 78.89 \text{ mW}) = 152.00 \text{ mW} = 21.82 \text{ dBm}$$

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 41 of 135

7.4 Power Spectral Density

Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates are investigated and the worst-case configuration results are reported in this section.

The maximum permissible power spectral density shall not be greater than 8 dBm in any 3 kHz band.

Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD

ANSI C63.10-2013 – Section 14.3.1 Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 10kHz
4. VBW = 1MHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

None.


FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 42 of 135

7.4.1 SISO Antenna-2 Power Spectral Density Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	b	1	-1.28	8.00	-9.28	Pass
2437	6	b	1	-1.19	8.00	-9.19	Pass
2462	11	b	1	-0.35	8.00	-8.35	Pass
2412	1	g	6	-4.59	8.00	-12.59	Pass
2437	6	g	6	-5.09	8.00	-13.09	Pass
2462	11	g	6	-3.12	8.00	-11.12	Pass
2412	1	n	6.5/7.2 (MCS0)	-4.07	8.00	-12.07	Pass
2437	6	n	6.5/7.2 (MCS0)	-3.23	8.00	-11.23	Pass
2462	11	n	6.5/7.2 (MCS0)	-3.03	8.00	-11.03	Pass
2412	1	ax	6.5/7.2 (MCS0)	-4.64	8.00	-12.64	Pass
2437	6	ax	6.5/7.2 (MCS0)	-3.78	8.00	-11.78	Pass
2462	11	ax	6.5/7.2 (MCS0)	-3.56	8.00	-11.56	Pass

Table 7-10. Conducted Power Spectral Density Measurements SISO ANT2

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 43 of 135

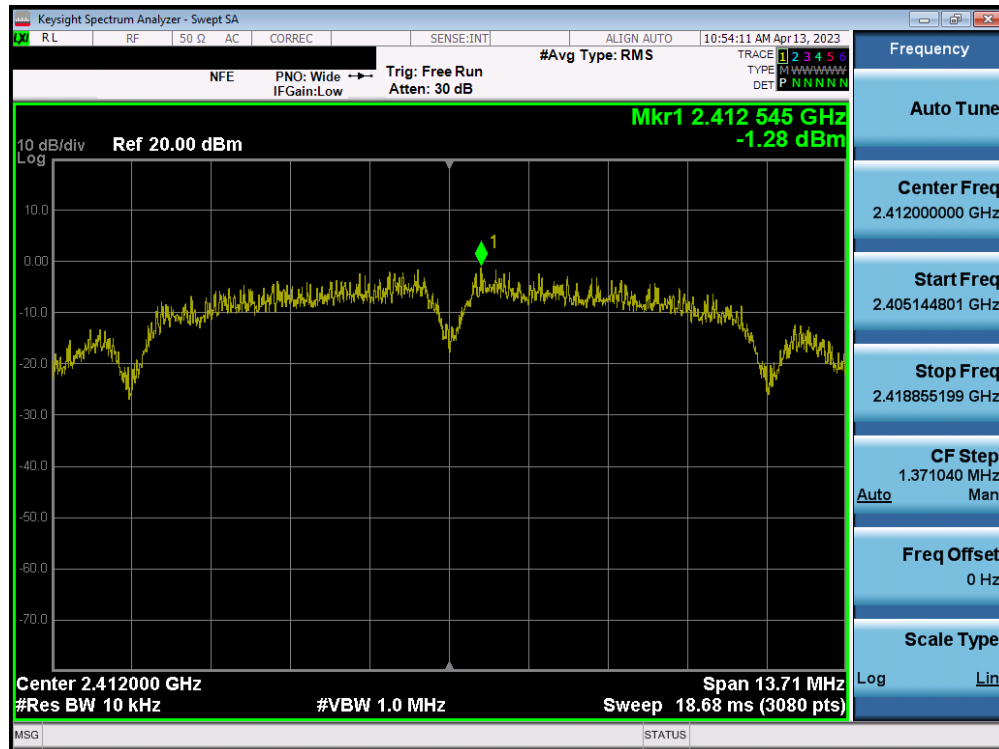


Plot 7-37. Power Spectral Density Plot SISO ANT2 (802.11b – Ch. 1)

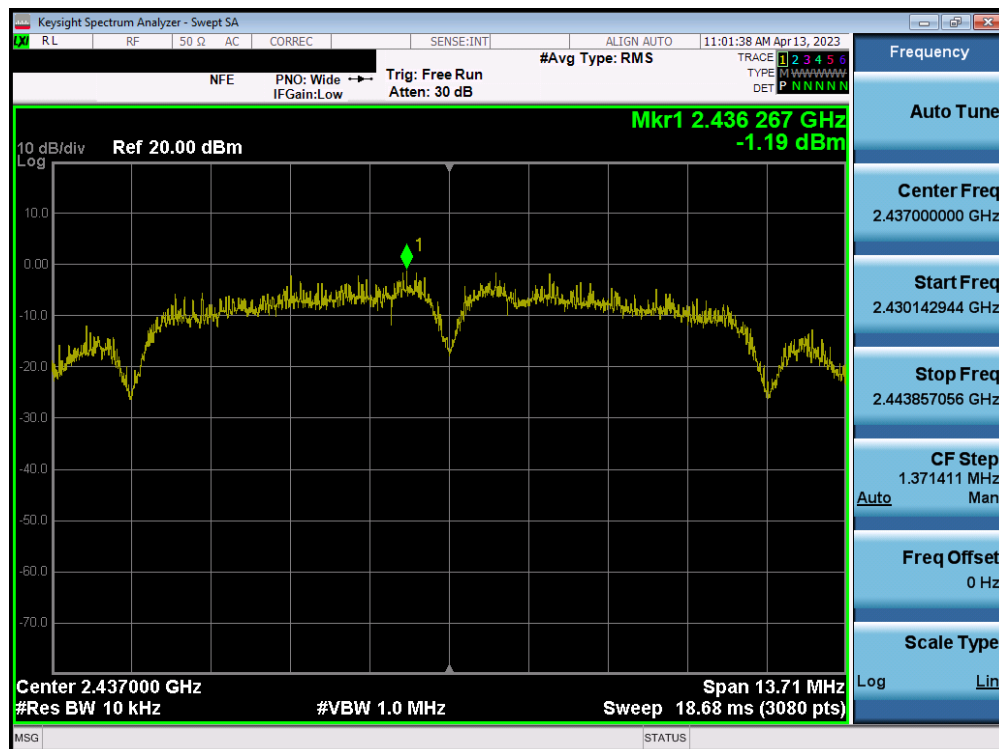


Plot 7-38. Power Spectral Density Plot SISO ANT2 (802.11b – Ch. 6)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 44 of 135

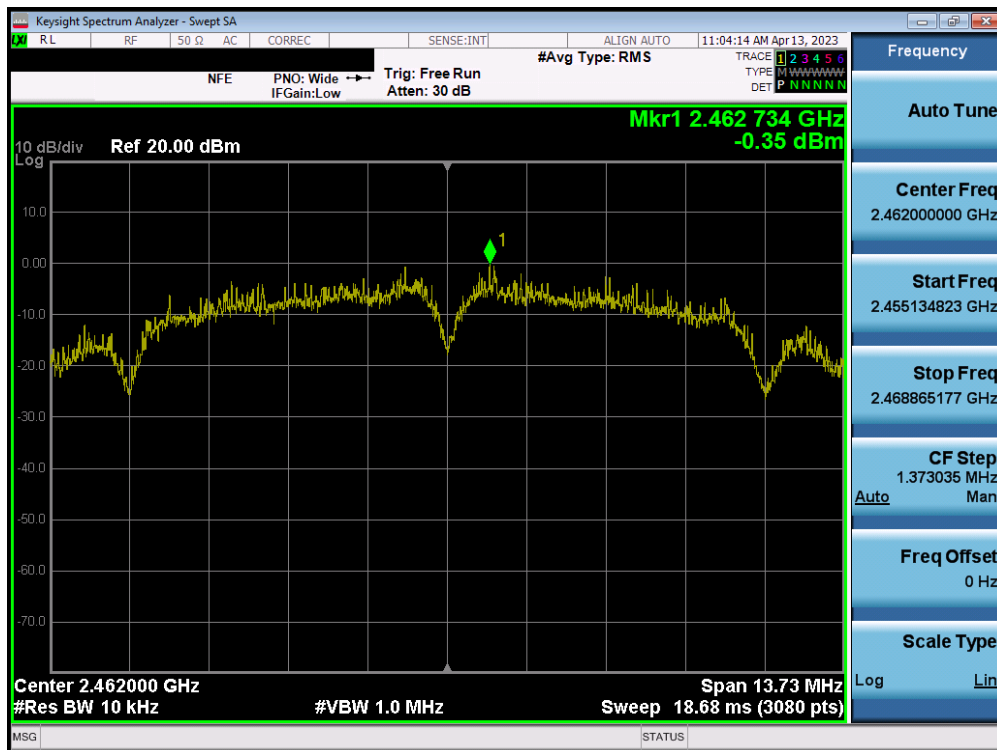


Plot 7-39. Power Spectral Density Plot SISO ANT2 (802.11b – Ch. 11)

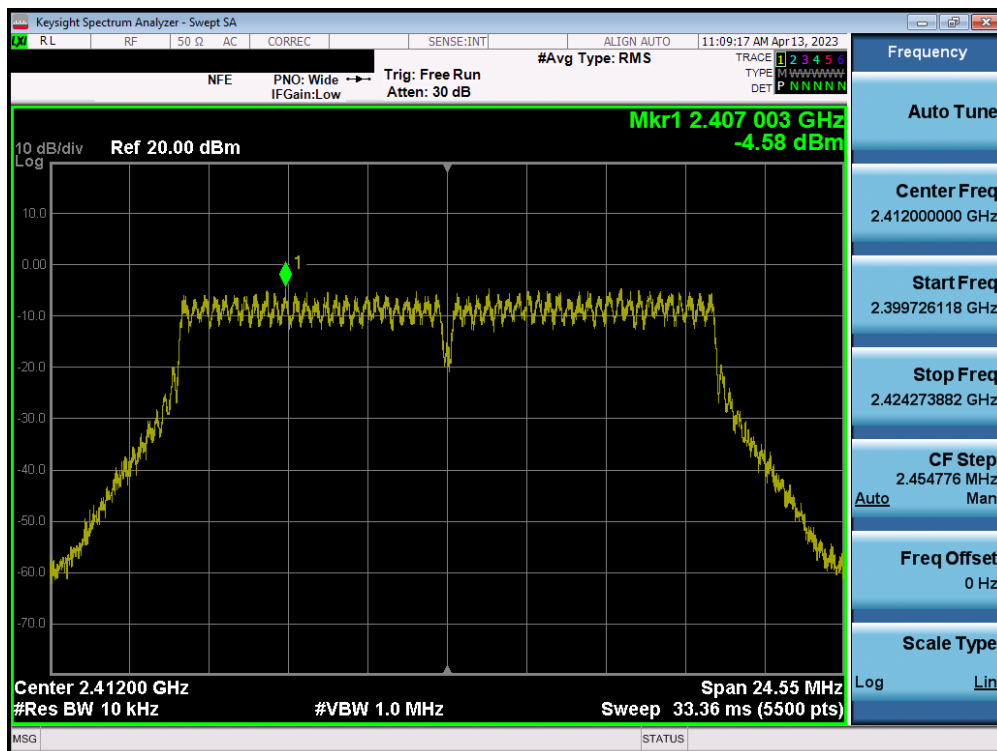


Plot 7-40. Power Spectral Density Plot SISO ANT2 (802.11g – Ch. 1)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 45 of 135

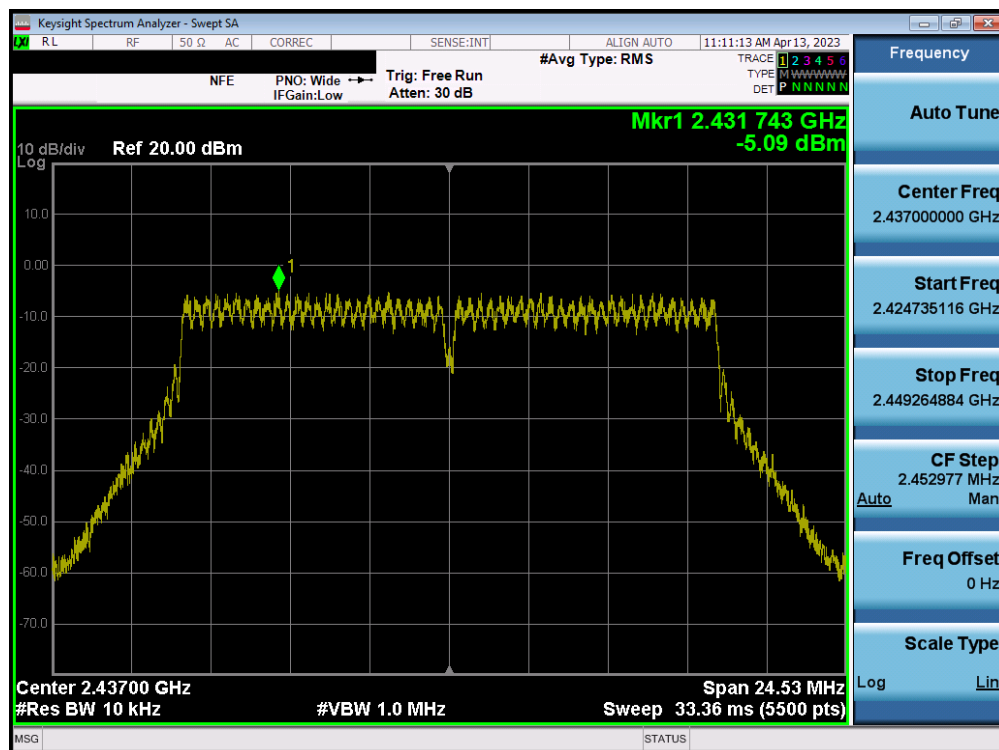


Plot 7-41. Power Spectral Density Plot SISO ANT2 (802.11g – Ch. 6)

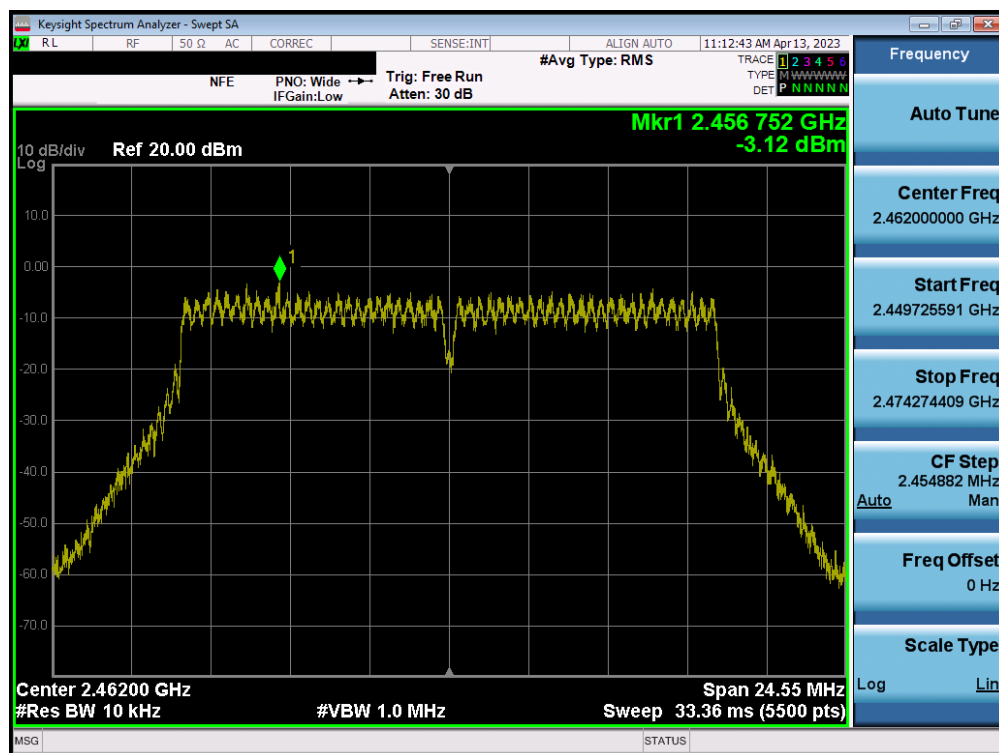


Plot 7-42. Power Spectral Density Plot SISO ANT2 (802.11g – Ch. 11)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 46 of 135

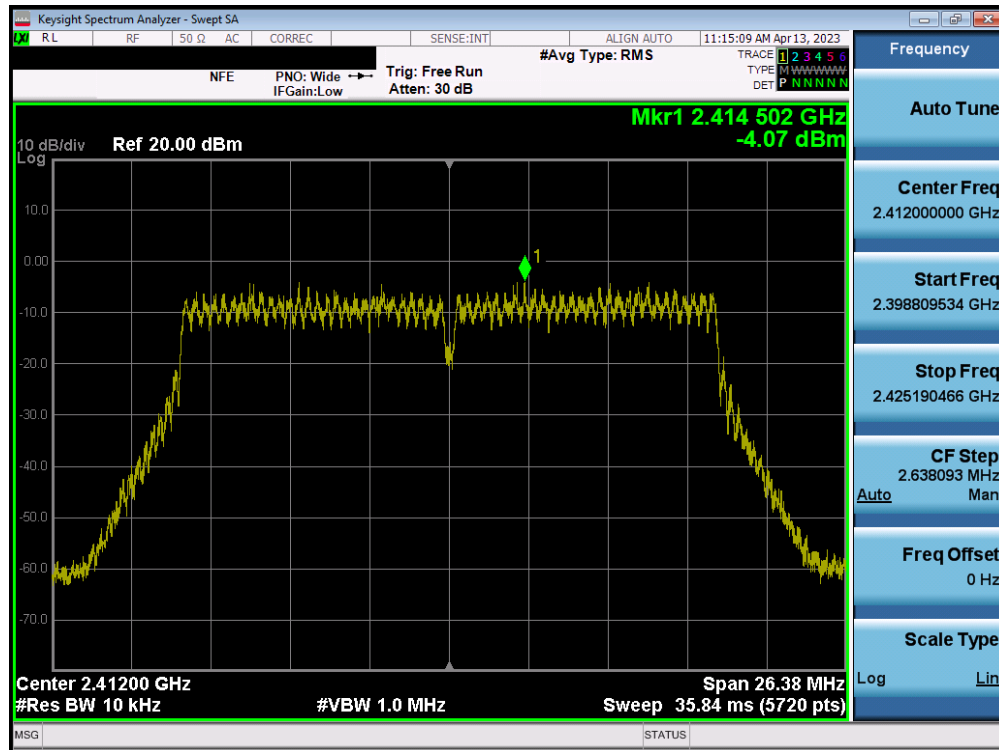


Plot 7-43. Power Spectral Density Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 1)

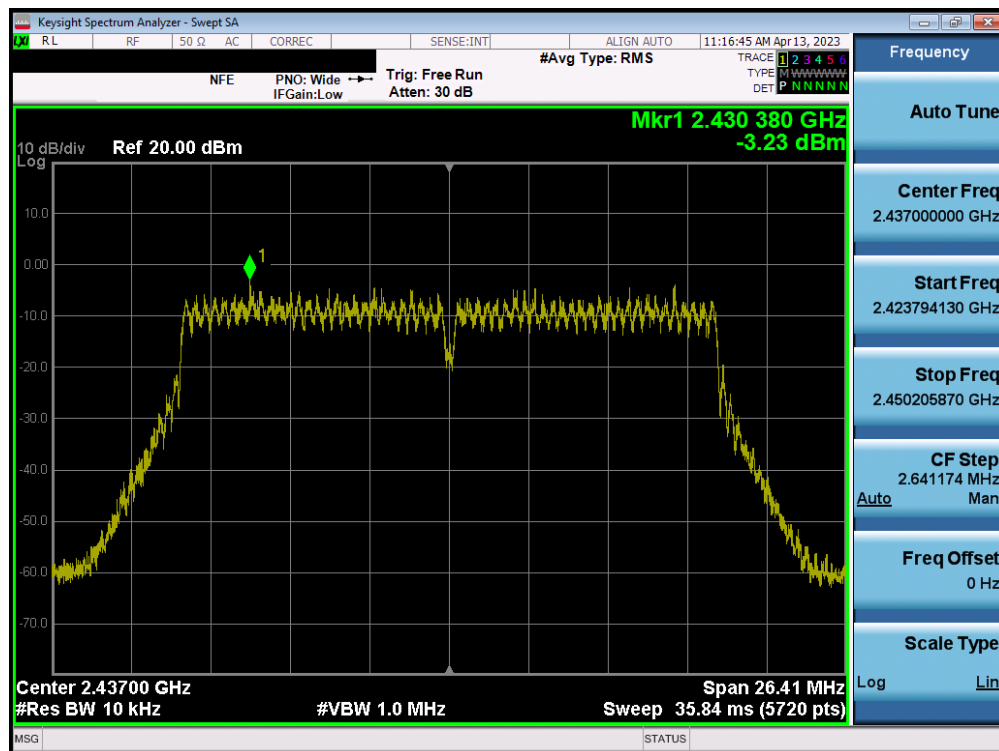


Plot 7-44. Power Spectral Density Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 6)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 47 of 135

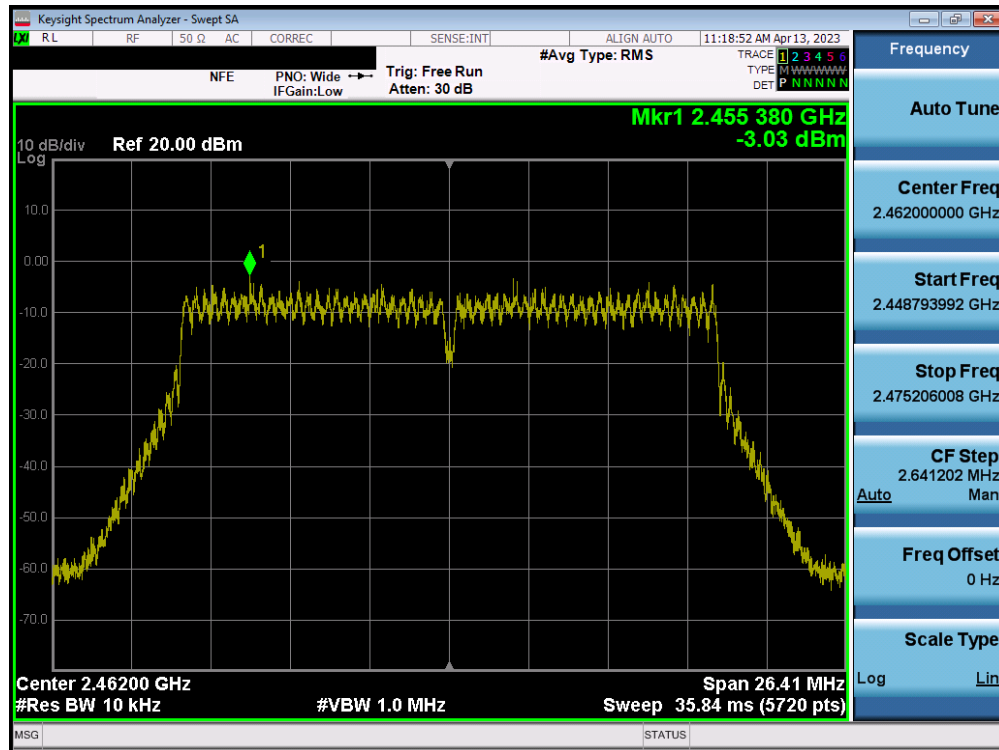


Plot 7-45. Power Spectral Density Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 11)

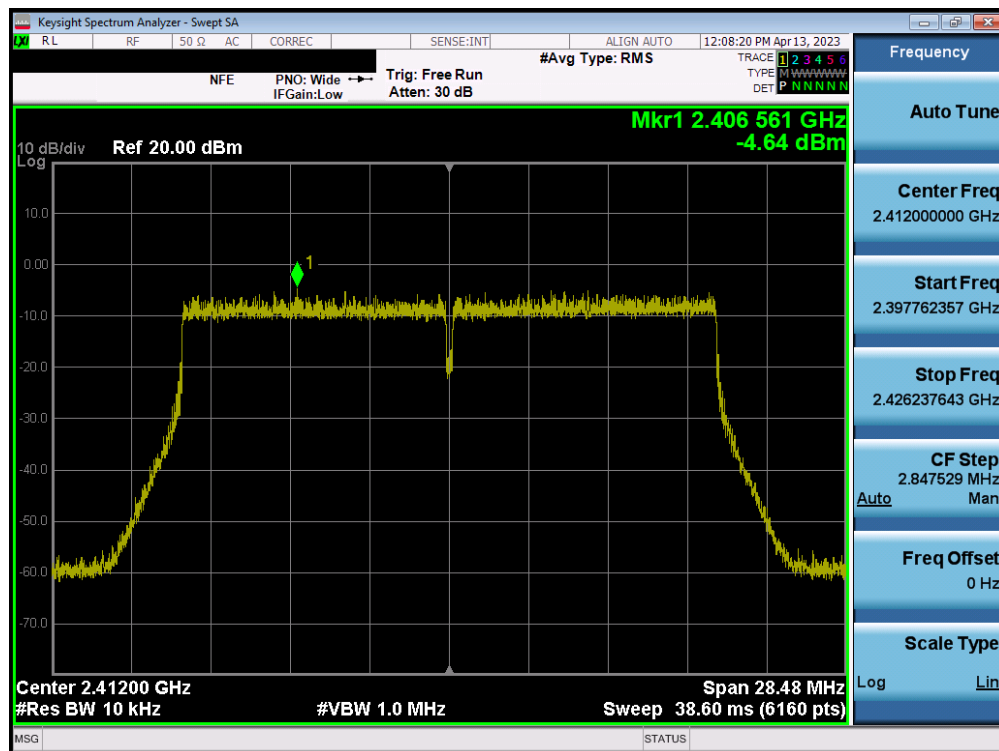


Plot 7-46. Power Spectral Density Plot SISO ANT2 (802.11ax (2.4GHz) – Ch. 1)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 48 of 135

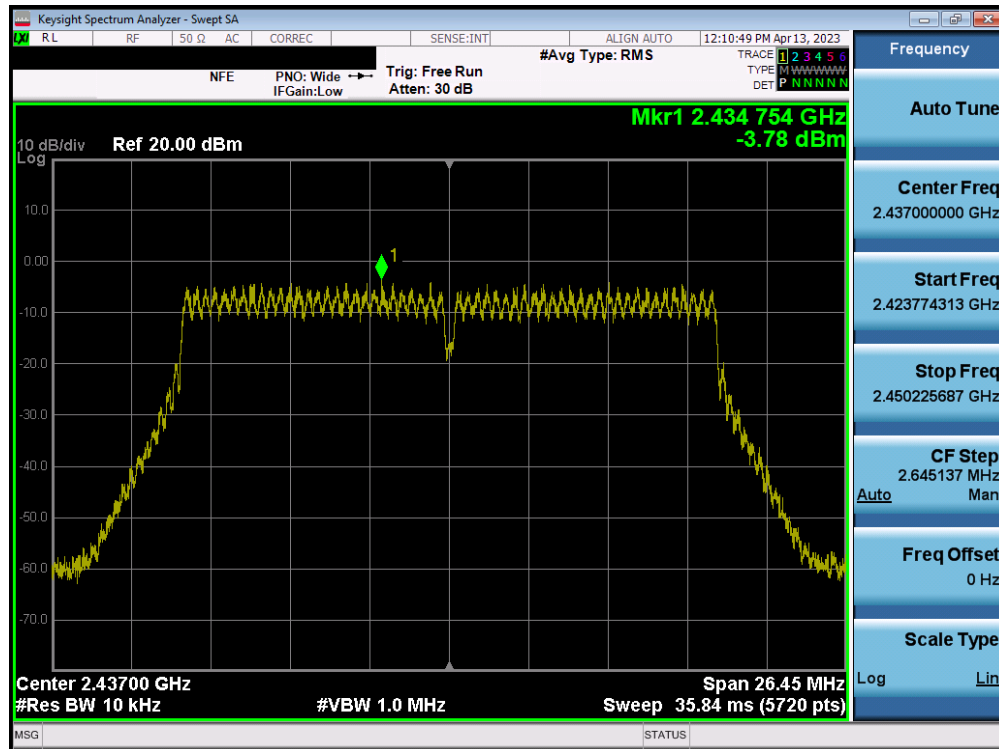

Plot 7-47. Power Spectral Density Plot SISO ANT2 (802.11ax (2.4GHz) – Ch. 6)

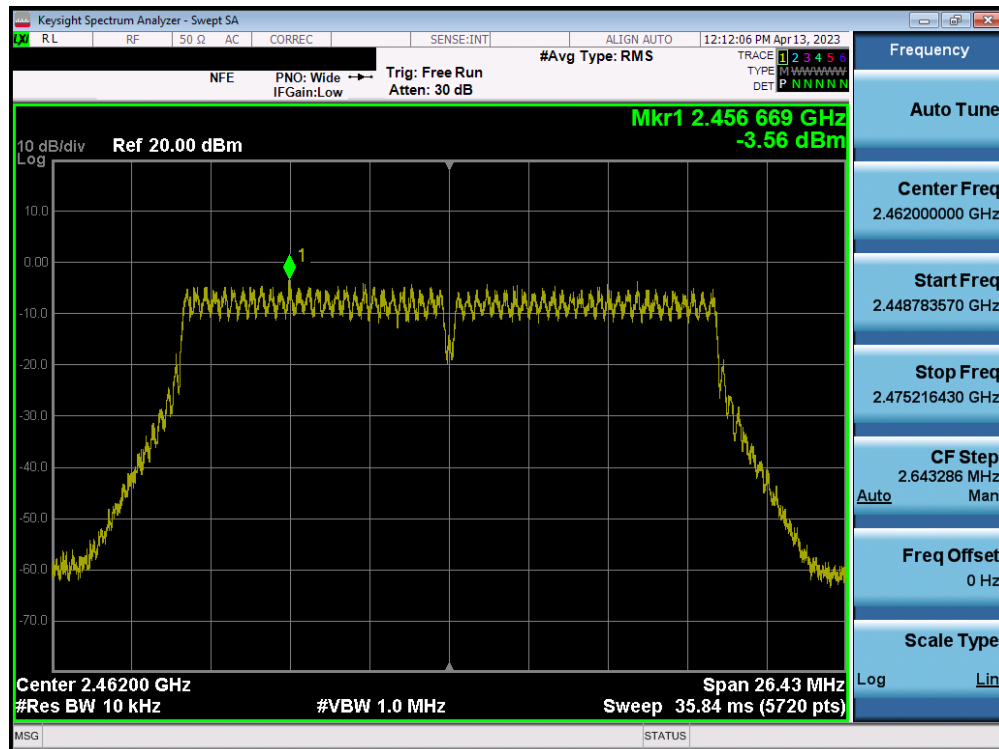

Plot 7-48. Power Spectral Density Plot SISO ANT2 (802.11ax (2.4GHz) – Ch. 11)


FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 49 of 135


7.4.2 MIMO Power Spectral Density Measurements

Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	ANT 1 Power Spectral Density [dBm]	ANT 2 Power Spectral Density [dBm]	Summed MIMO Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	b	1	-0.87	-0.62	2.27	8.00	-5.73	Pass
2437	6	b	1	-1.10	-2.44	1.29	8.00	-6.71	Pass
2462	11	b	1	-1.10	-2.00	1.48	8.00	-6.52	Pass
2412	1	g	6	-3.54	-4.91	-1.16	8.00	-9.16	Pass
2437	6	g	6	-2.07	-4.52	-0.11	8.00	-8.11	Pass
2462	11	g	6	-3.75	-5.09	-1.36	8.00	-9.36	Pass
2412	1	n	6.5/7.2 (MCS0)	-1.91	-3.15	0.53	8.00	-7.47	Pass
2437	6	n	6.5/7.2 (MCS0)	-3.05	-2.99	-0.01	8.00	-8.01	Pass
2462	11	n	6.5/7.2 (MCS0)	-2.64	-2.85	0.27	8.00	-7.73	Pass
2412	1	ax	6.5/7.2 (MCS0)	-3.89	-3.72	-0.79	8.00	-8.79	Pass
2437	6	ax	6.5/7.2 (MCS0)	-2.90	-4.31	-0.54	8.00	-8.54	Pass
2462	11	ax	6.5/7.2 (MCS0)	-4.47	-5.16	-1.79	8.00	-9.79	Pass


Table 7-11. Conducted Power Spectral Density Measurements MIMO

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 50 of 135

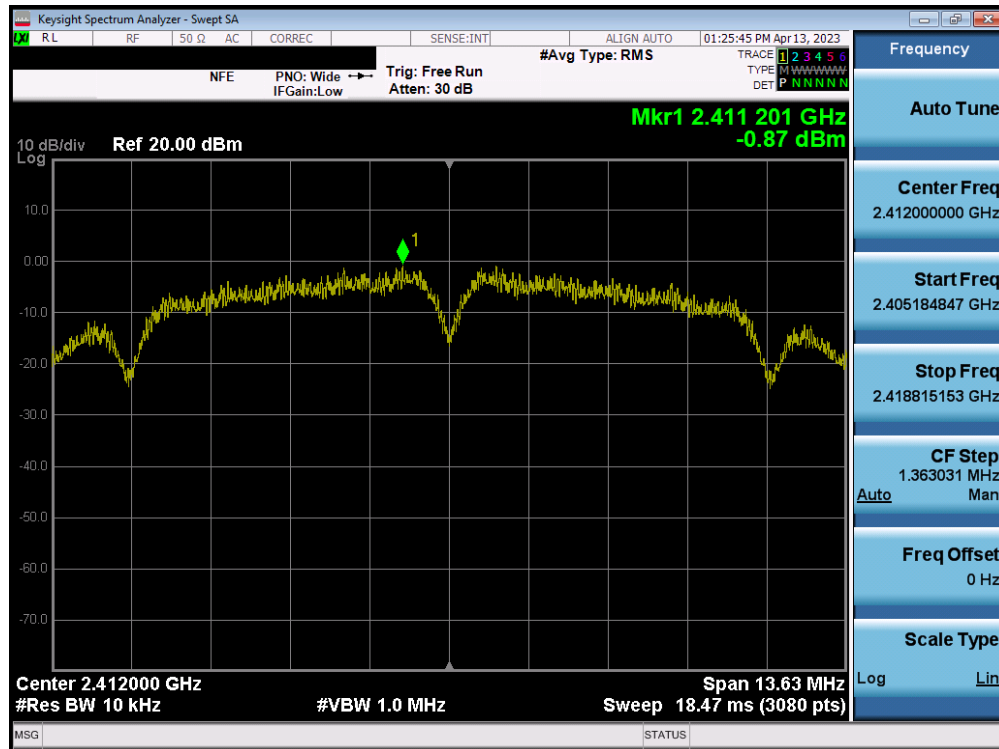

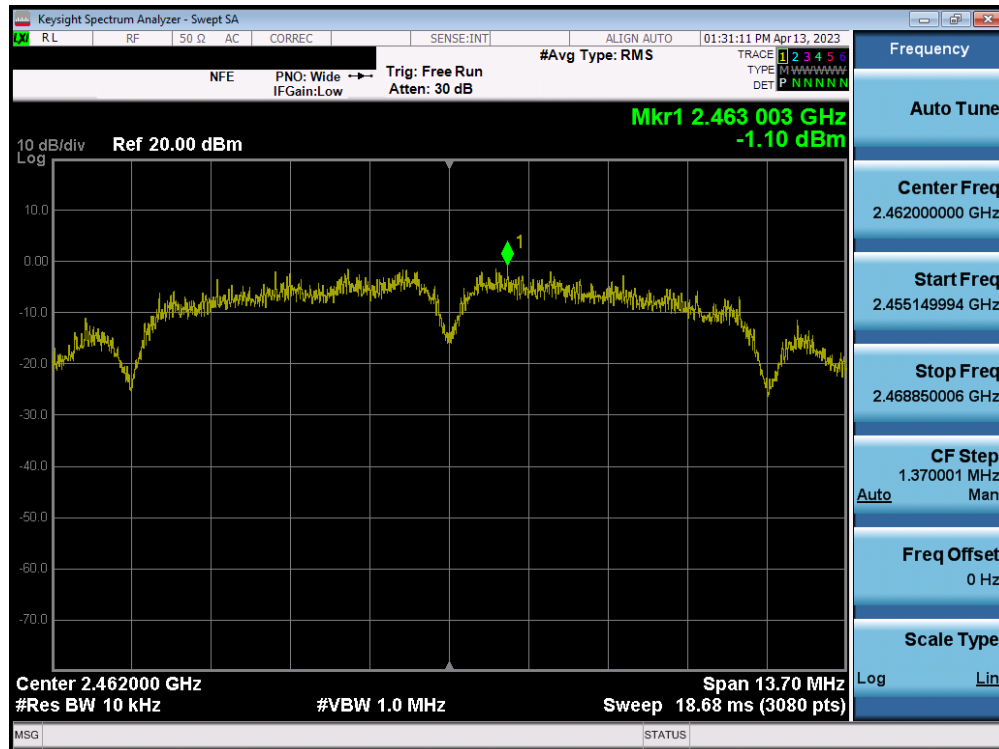


Plot 7-51. Power Spectral Density Plot MIMO ANT1 (802.11b – Ch. 11)

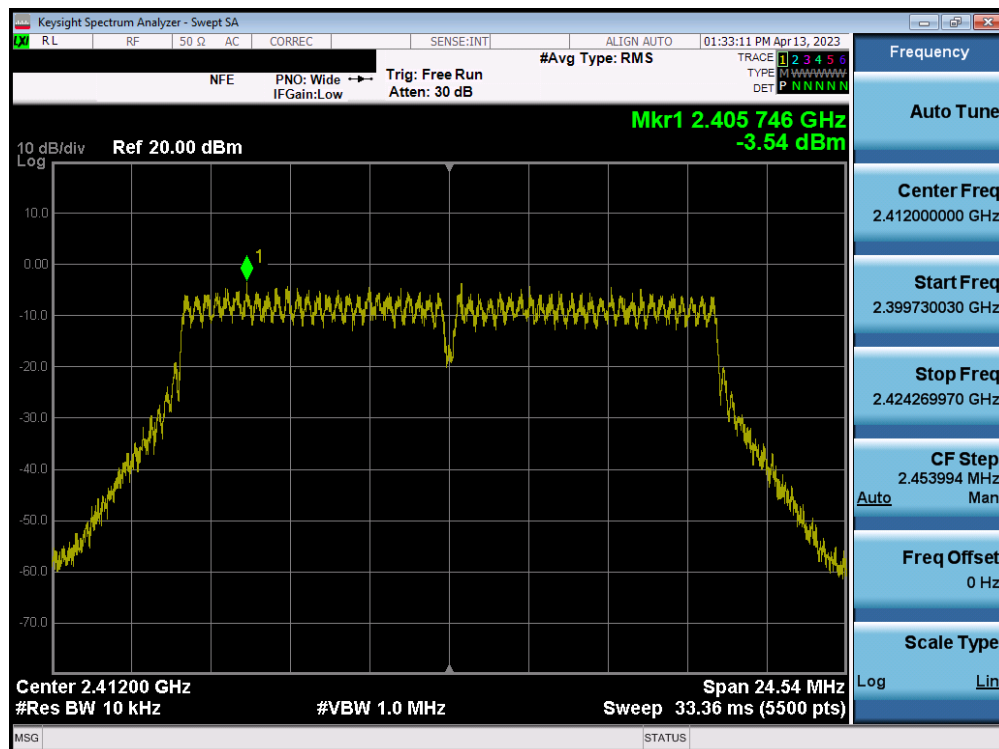


Plot 7-52. Power Spectral Density Plot MIMO ANT1 (802.11g – Ch. 1)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 52 of 135

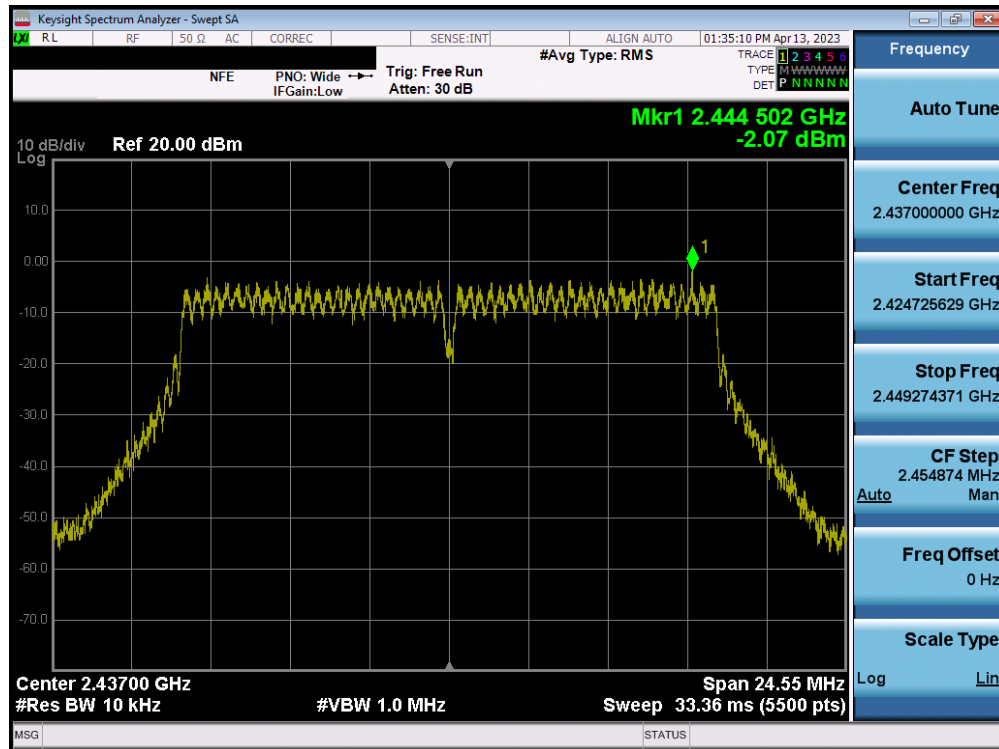


Plot 7-53. Power Spectral Density Plot MIMO ANT1 (802.11g – Ch. 6)

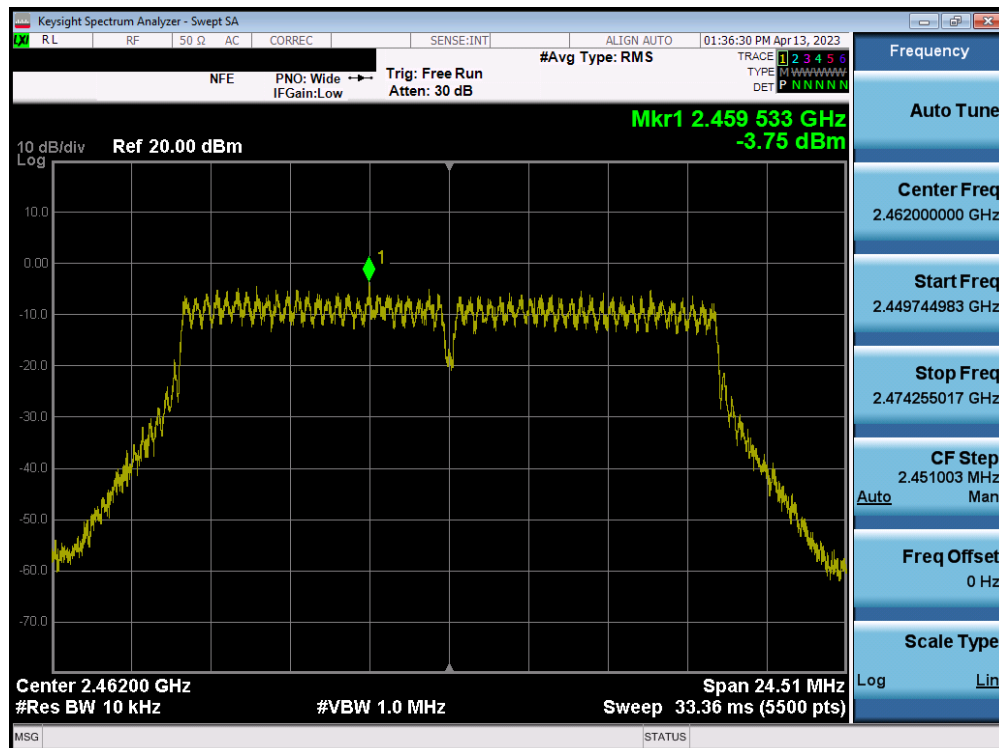


Plot 7-54. Power Spectral Density Plot MIMO ANT1 (802.11g – Ch. 11)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 53 of 135

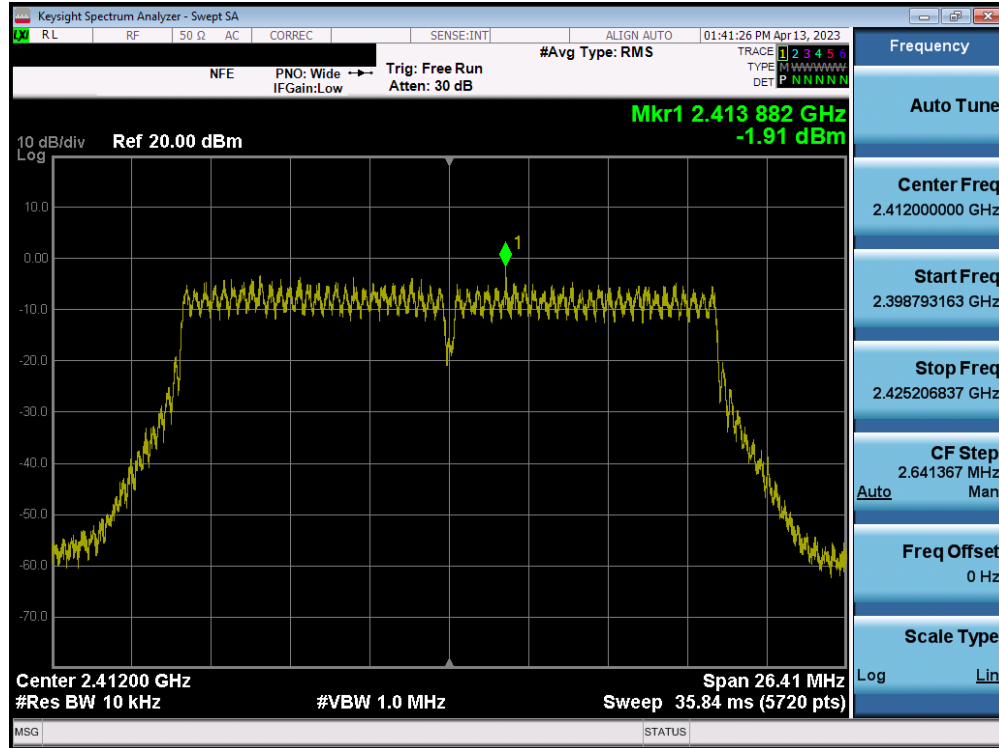


Plot 7-55. Power Spectral Density Plot MIMO ANT1 (802.11n (2.4GHz) – Ch. 1)

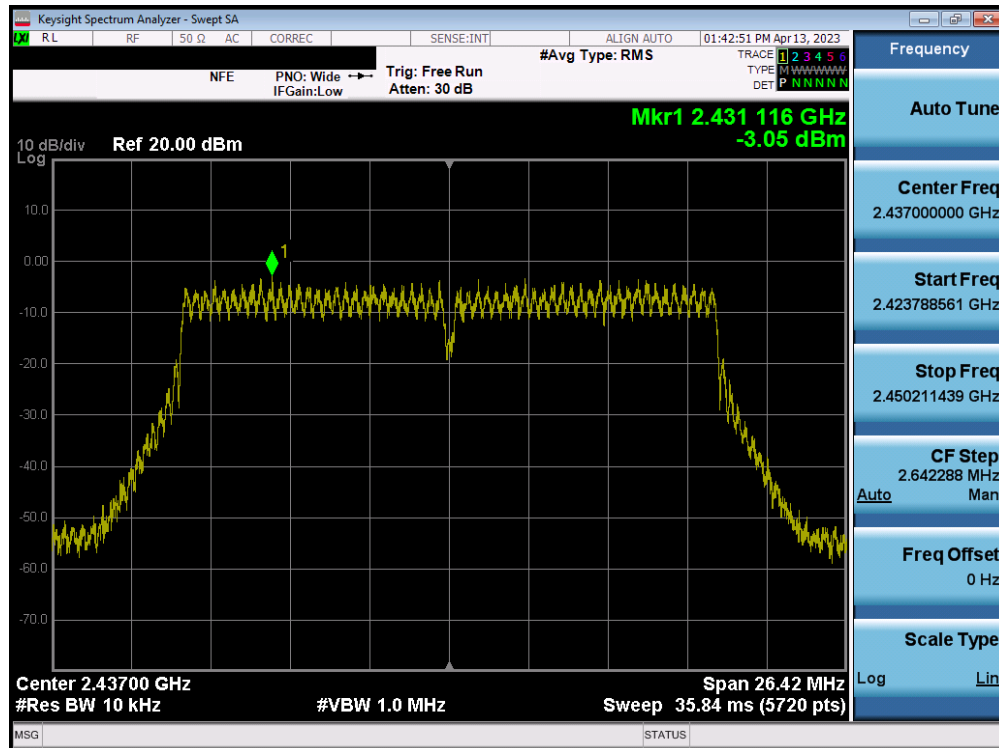


Plot 7-56. Power Spectral Density Plot MIMO ANT1 (802.11n (2.4GHz) – Ch. 6)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 54 of 135

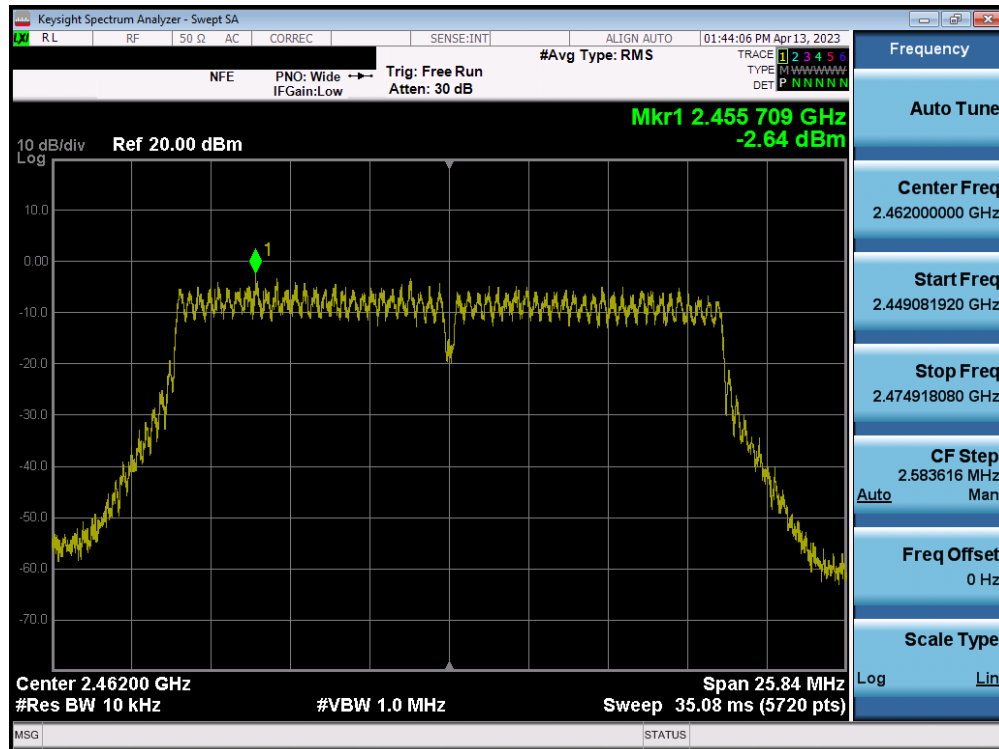


Plot 7-57. Power Spectral Density Plot MIMO ANT1 (802.11n (2.4GHz) – Ch. 11)

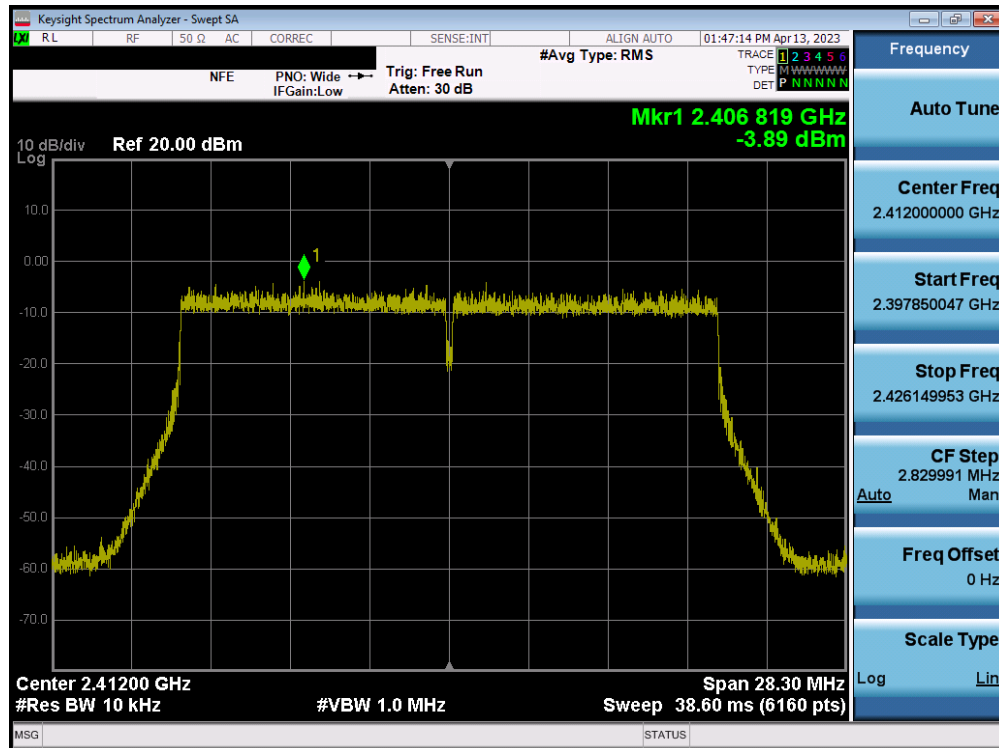


Plot 7-58. Power Spectral Density Plot MIMO ANT1 (802.11ax (2.4GHz) – Ch. 1)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 55 of 135

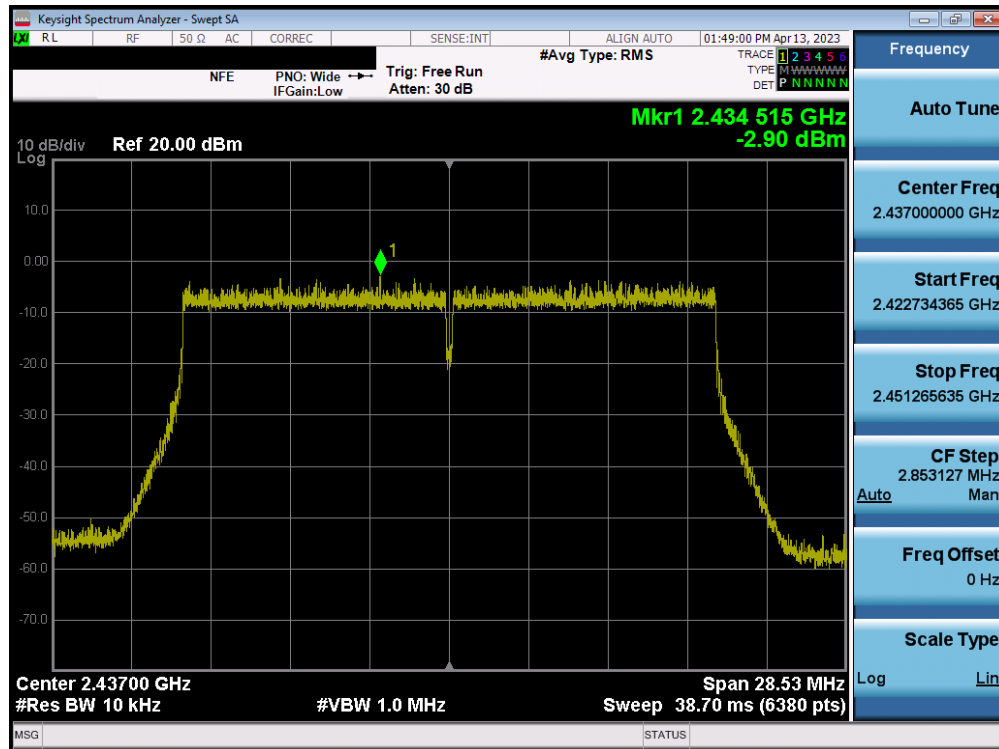


Plot 7-59. Power Spectral Density Plot MIMO ANT1 (802.11ax (2.4GHz) – Ch. 6)

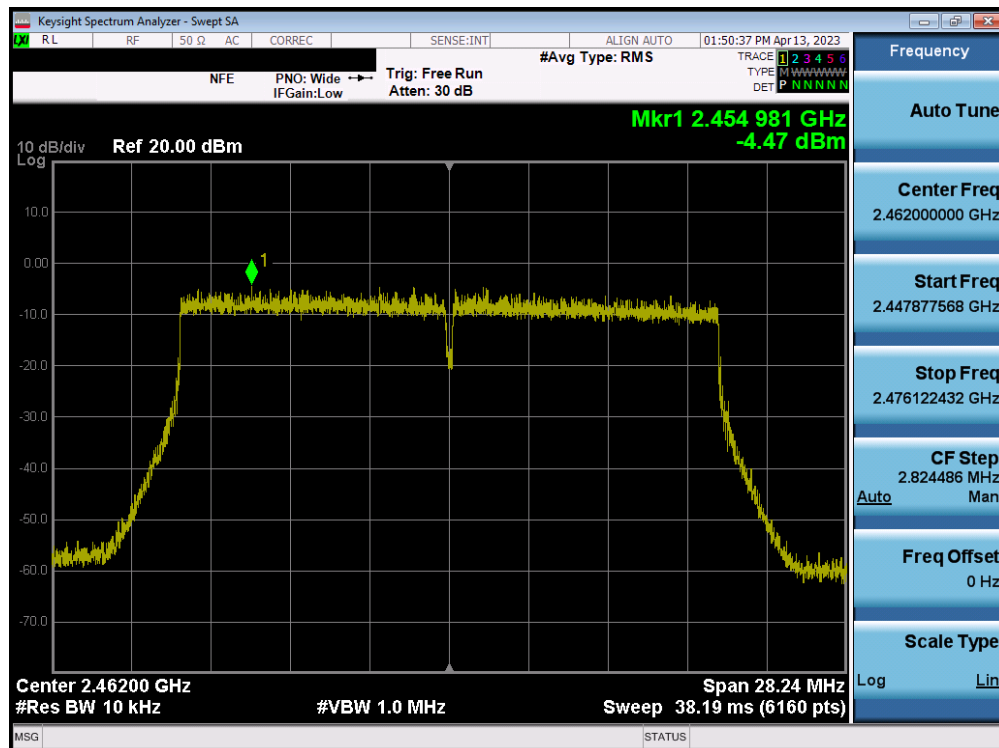

Plot 7-60. Power Spectral Density Plot MIMO ANT1 (802.11ax (2.4GHz) – Ch. 11)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 56 of 135

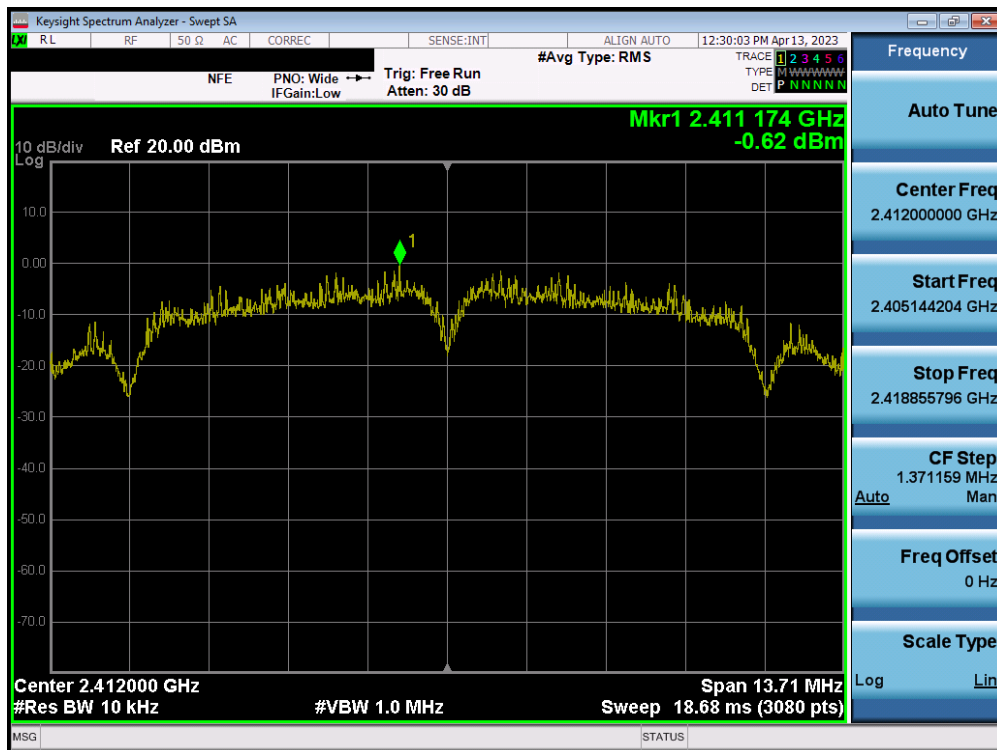

Plot 7-61. Power Spectral Density Plot MIMO ANT2 (802.11b – Ch. 1)




Plot 7-62. Power Spectral Density Plot MIMO ANT2 (802.11b – Ch. 6)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 57 of 135




Plot 7-63. Power Spectral Density Plot MIMO ANT2 (802.11b – Ch. 11)

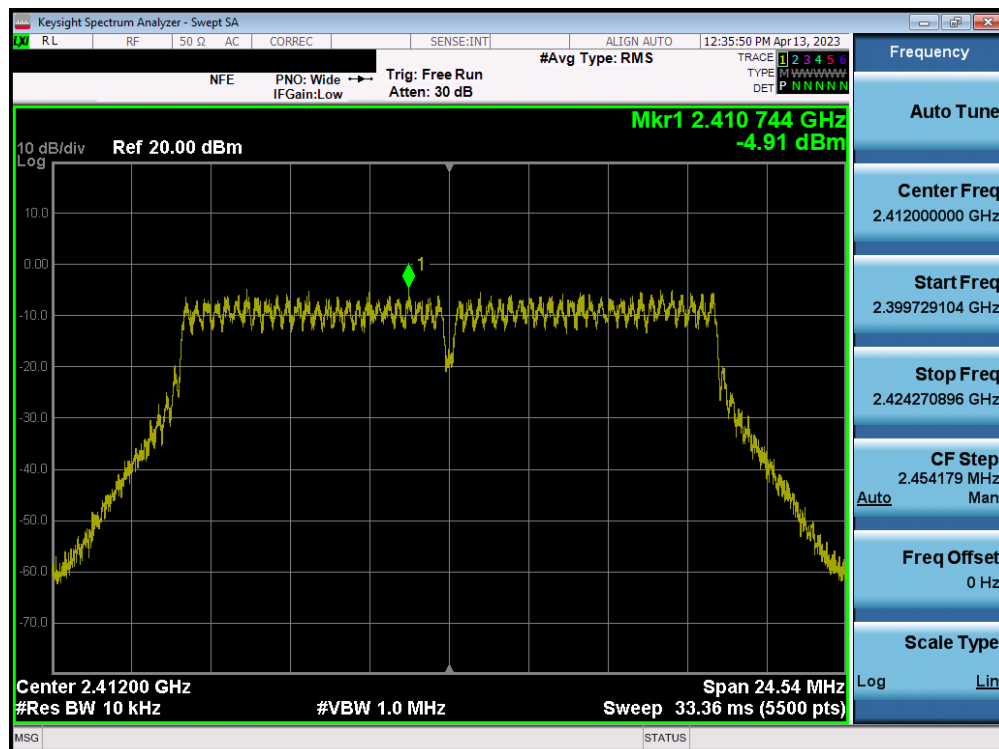


Plot 7-64. Power Spectral Density Plot MIMO ANT2 (802.11g – Ch. 1)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 58 of 135

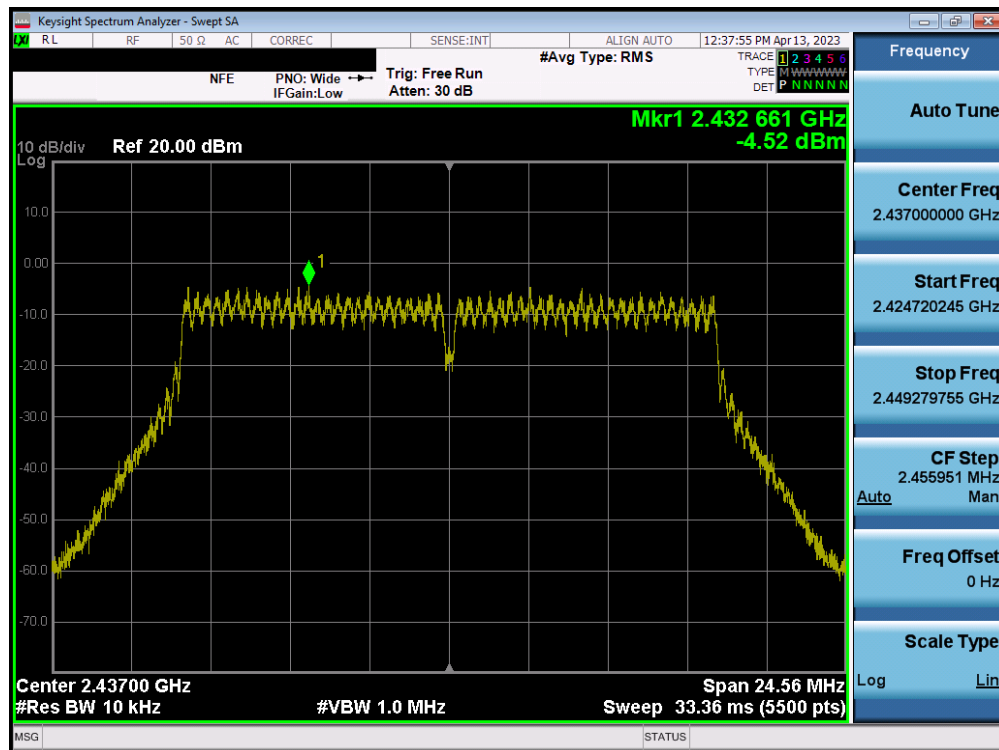


Plot 7-65. Power Spectral Density Plot MIMO ANT2 (802.11g – Ch. 6)

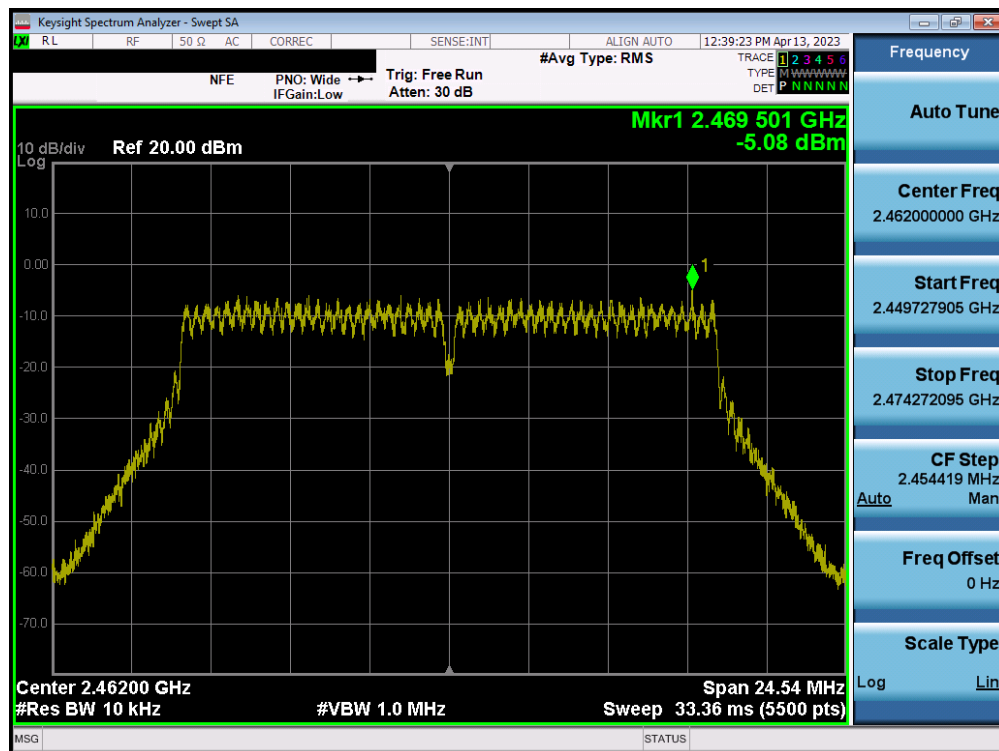


Plot 7-66. Power Spectral Density Plot MIMO ANT2 (802.11g – Ch. 11)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 59 of 135

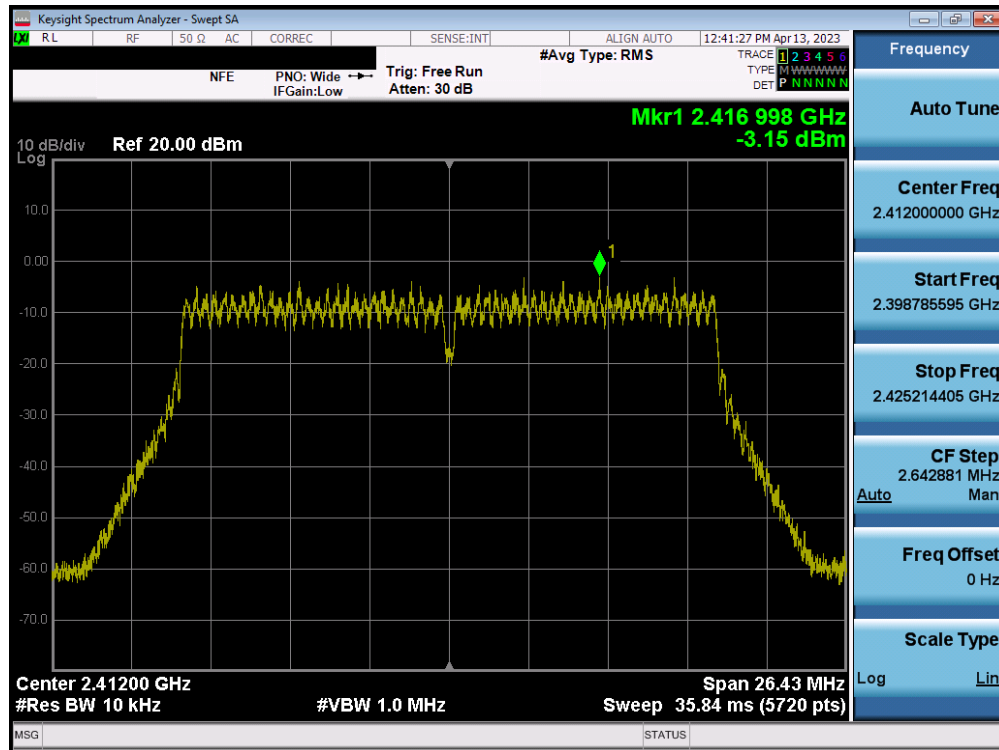


Plot 7-67. Power Spectral Density Plot MIMO ANT2 (802.11n (2.4GHz) – Ch. 1)

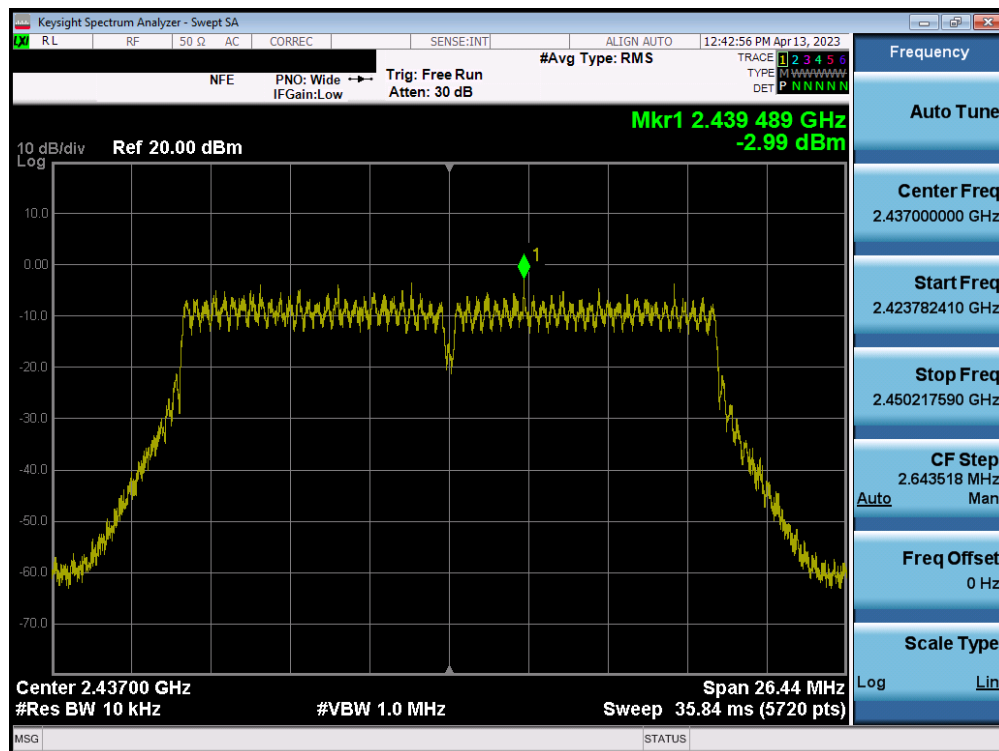


Plot 7-68. Power Spectral Density Plot MIMO ANT2 (802.11n (2.4GHz) – Ch. 6)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 60 of 135

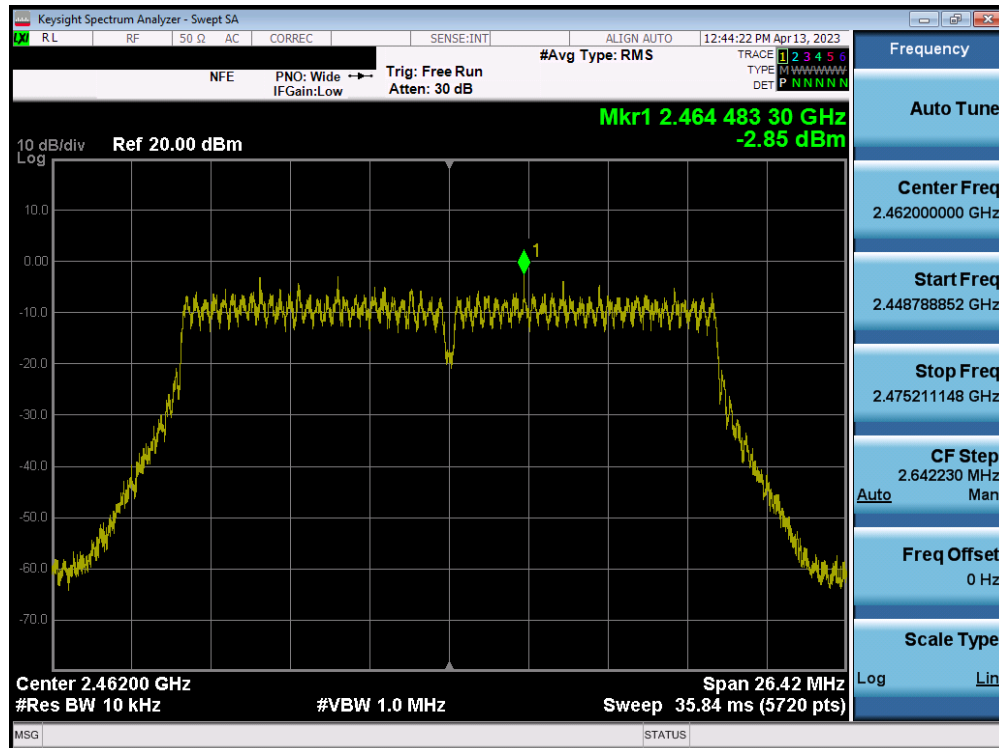


Plot 7-69. Power Spectral Density Plot MIMO ANT2 (802.11n (2.4GHz) – Ch. 11)

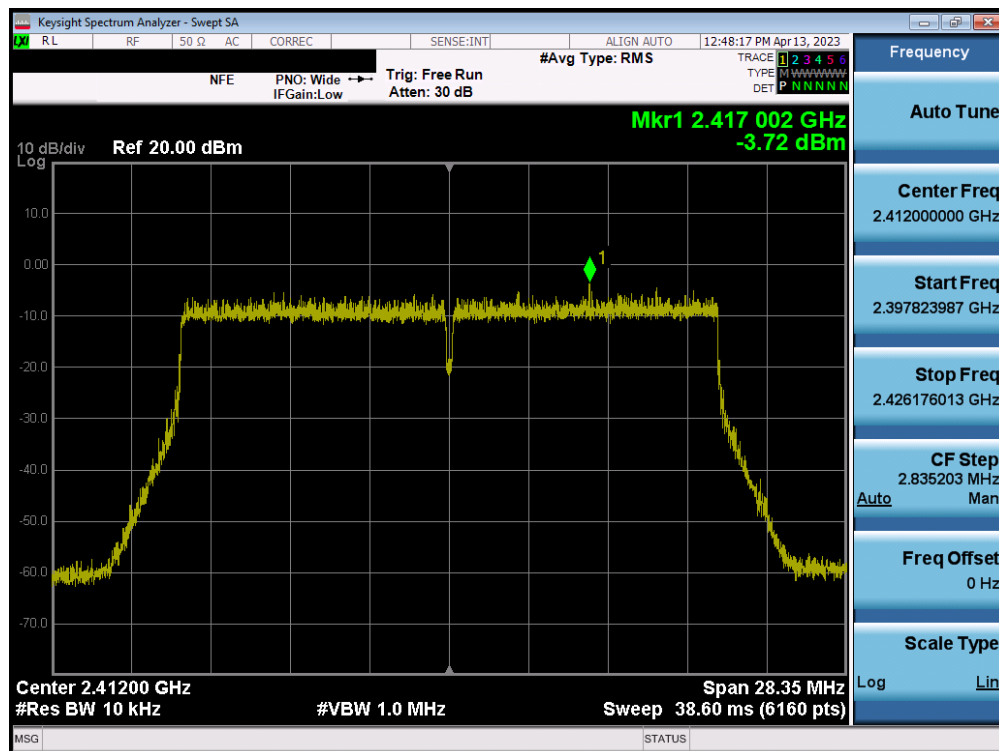


Plot 7-70. Power Spectral Density Plot MIMO ANT2 (802.11ax (2.4GHz) – Ch. 1)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 61 of 135

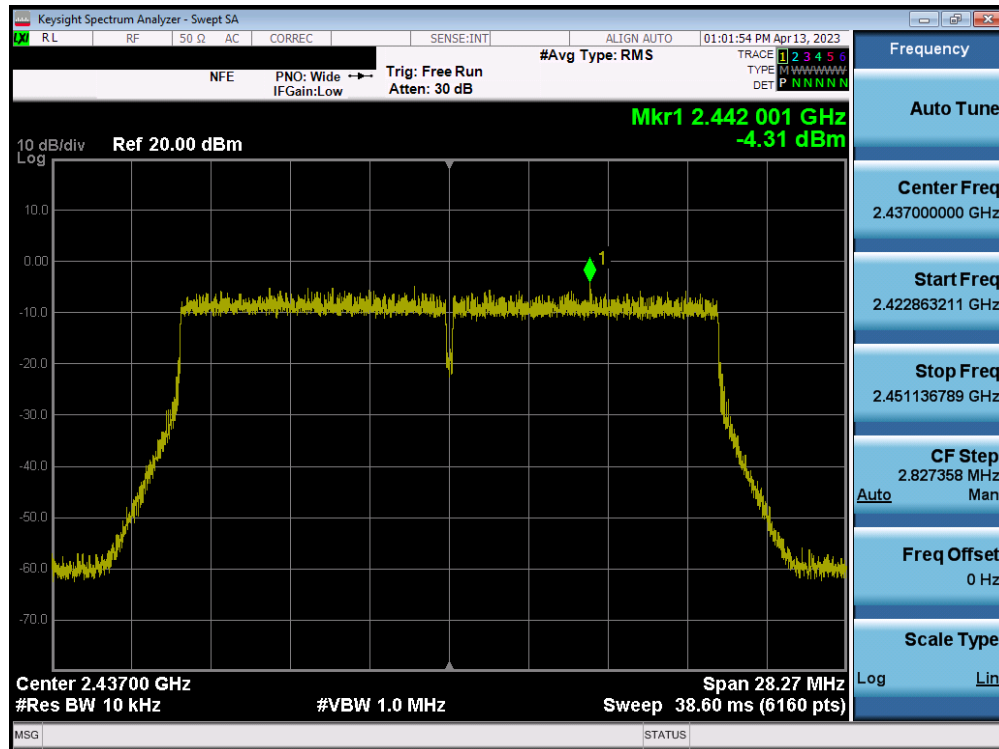

Plot 7-71. Power Spectral Density Plot MIMO ANT2 (802.11ax (2.4GHz) – Ch. 6)

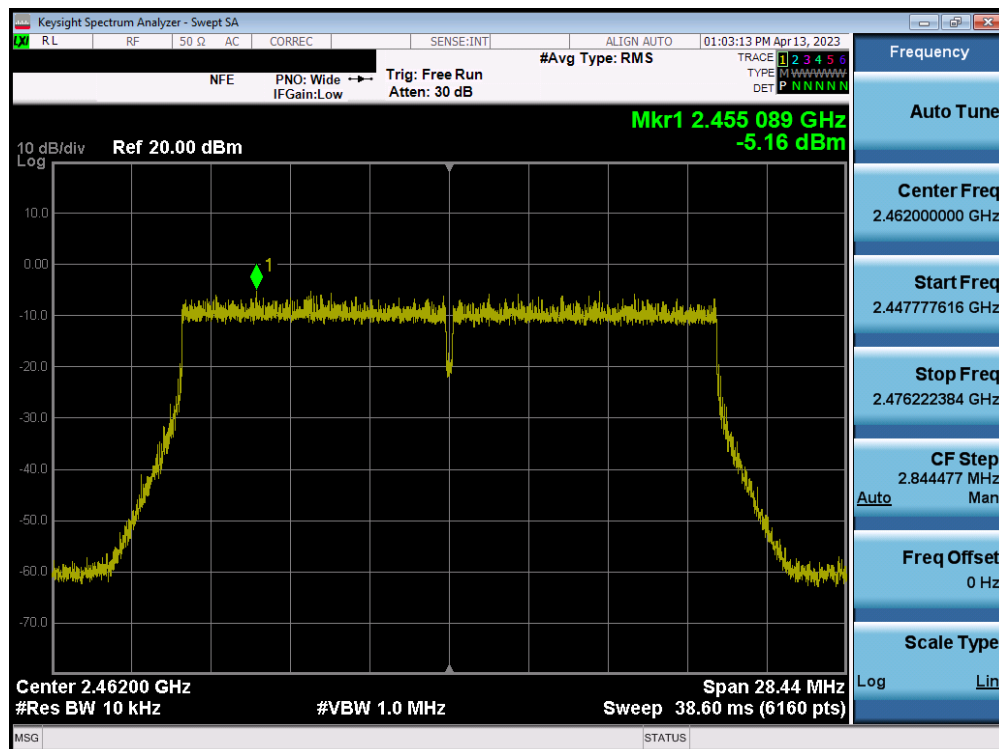

Plot 7-72. Power Spectral Density Plot MIMO ANT2 (802.11ax (2.4GHz) – Ch. 11)

Note:

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 62 of 135



Per ANSI C63.10-2013 Section 14.3.1, the power spectral density at Antenna 1 and Antenna 2 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

At 2412MHz the average conducted power spectral density was measured to be -0.87 dBm for Antenna 1 and -0.62 dBm for Antenna 2.

Antenna 1 + Antenna 2 = MIMO

$$(-0.87 \text{ dBm} + -0.62 \text{ dBm}) = (0.819 \text{ mW} + 0.867 \text{ mW}) = 1.686 \text{ mW} = 2.27 \text{ dBm}$$

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 63 of 135

7.5 Conducted Band Edge Emissions

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. For the following out of band conducted spurious emissions plots at the band edge, the EUT was set at a data rate of 1Mbps for “b” mode, 6 Mbps for “g” mode, 6.5\7.2Mbps for “n” mode, and 8.6Mbps for “ax” mode as these settings produced the worst-case emissions.

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 7.4).

Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 1MHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span} \backslash \text{RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-4. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 64 of 135

7.5.1 SISO Antenna-2 Conducted Band Edge Emissions

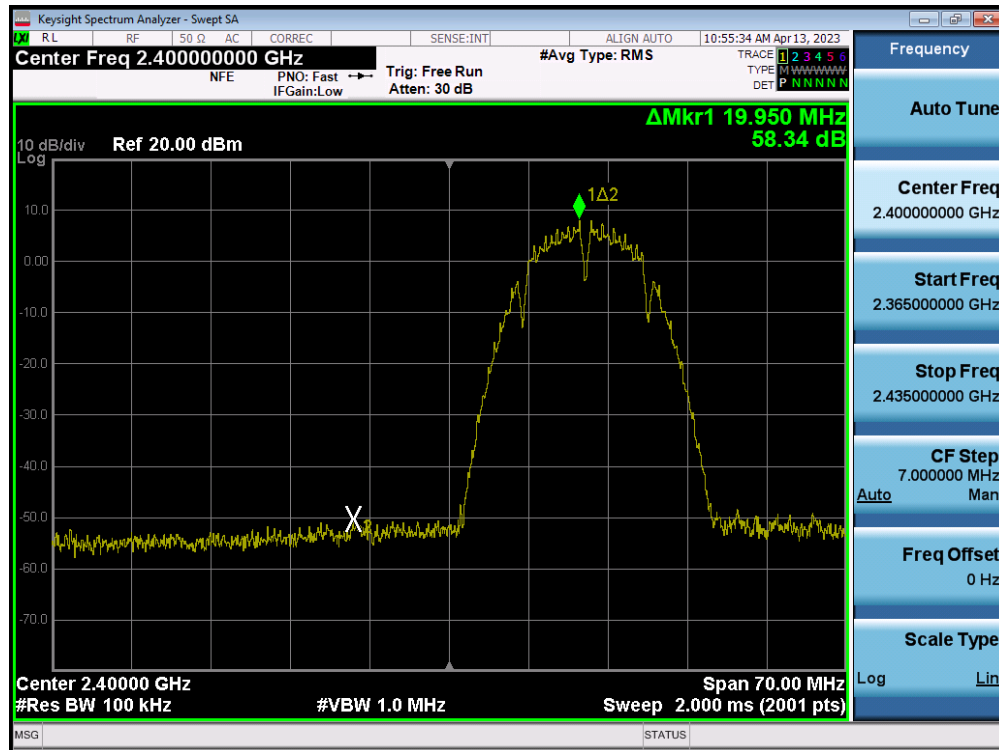


Plot 7-73. Band Edge Plot SISO ANT2 (802.11b – Ch. 1)

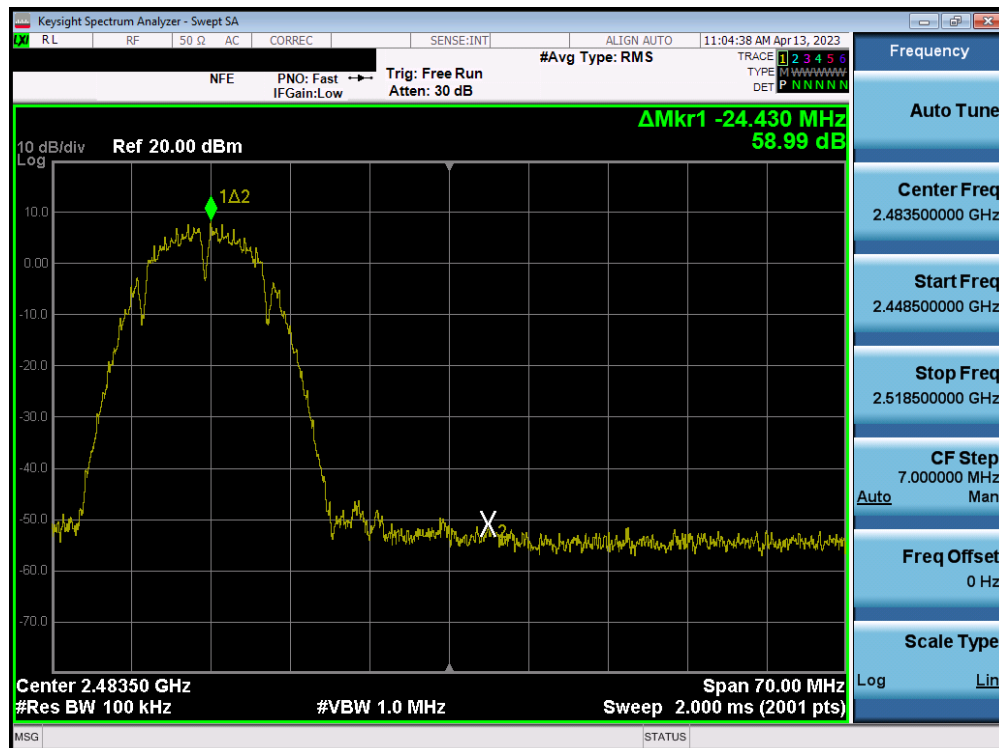


Plot 7-74. Band Edge Plot SISO ANT2 (802.11b – Ch. 11)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 65 of 135

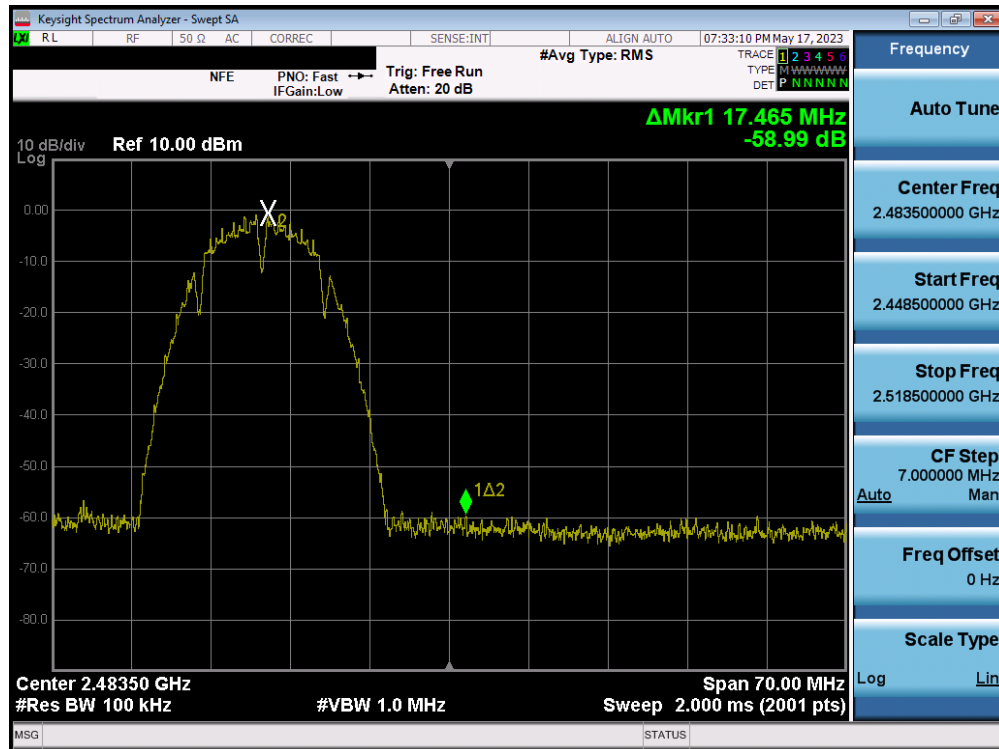


Plot 7-75. Band Edge Plot SISO ANT2 (802.11b – Ch. 12)

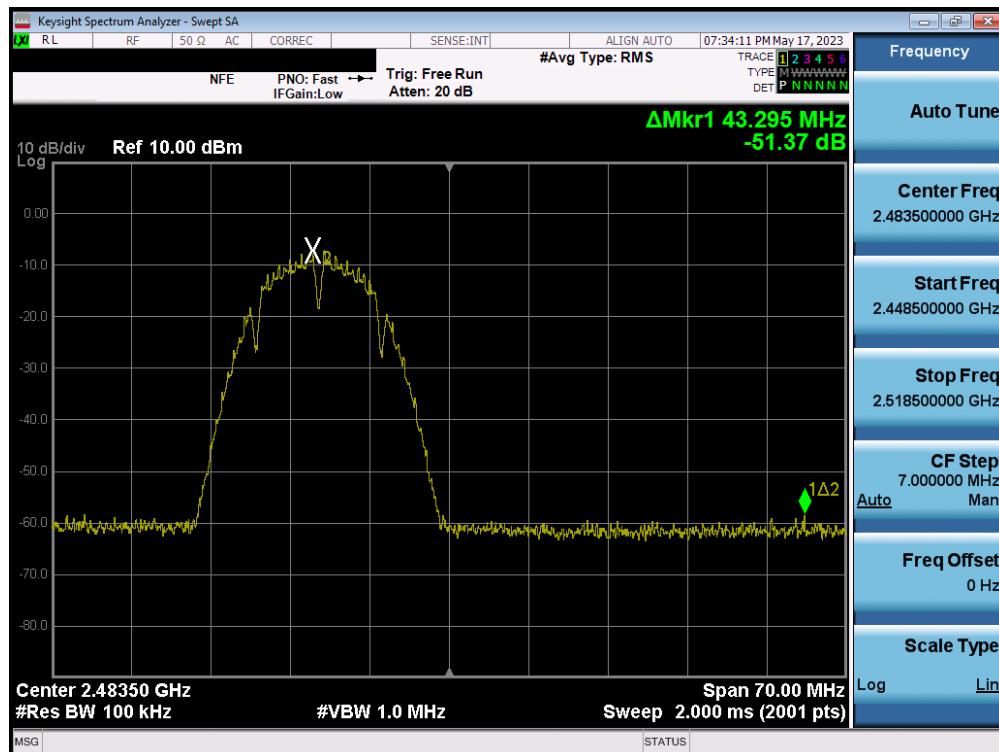


Plot 7-76. Band Edge Plot SISO ANT2 (802.11b – Ch. 13)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 66 of 135

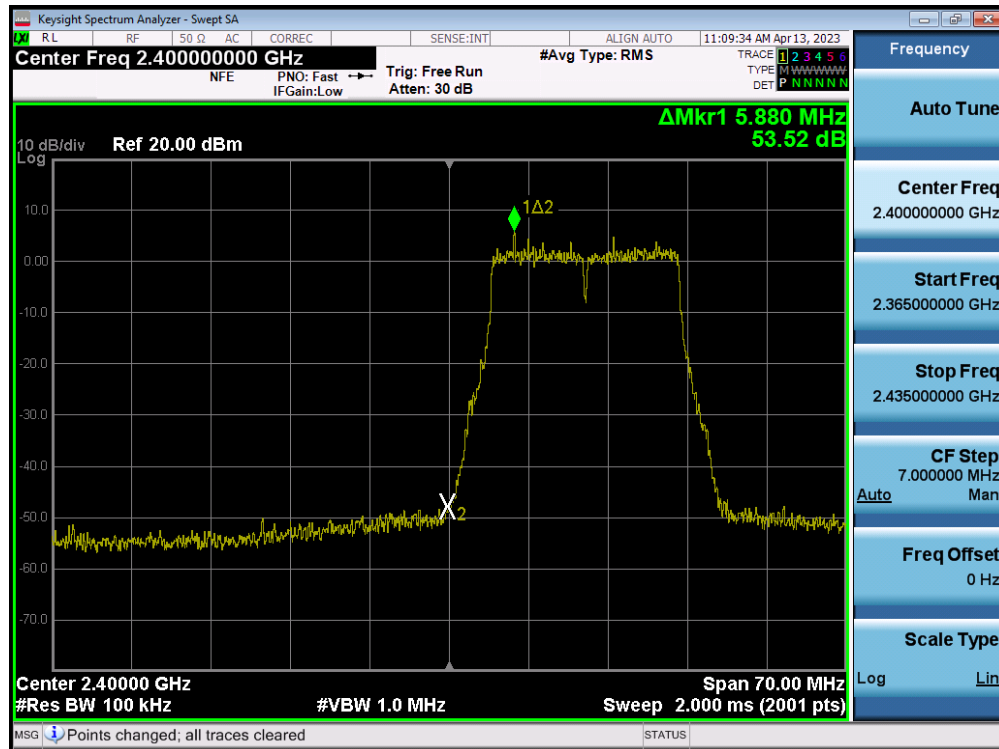


Plot 7-77. Band Edge Plot SISO ANT2 (802.11g- Ch. 1)

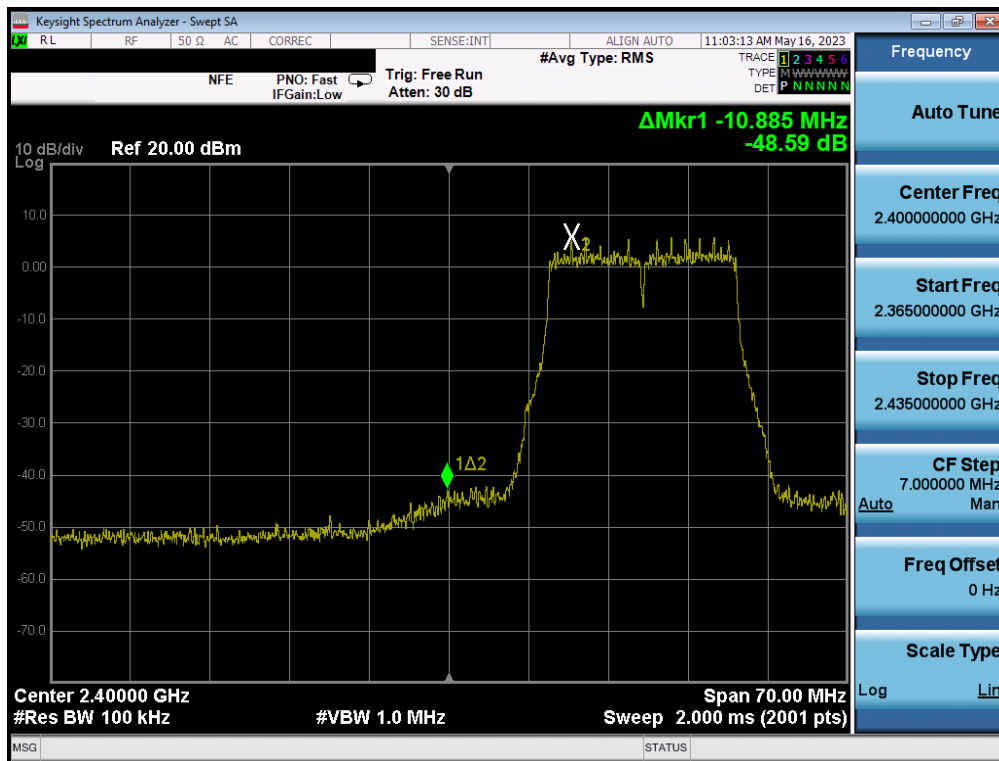


Plot 7-78. Band Edge Plot SISO ANT2 (802.11g- Ch. 2)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 67 of 135

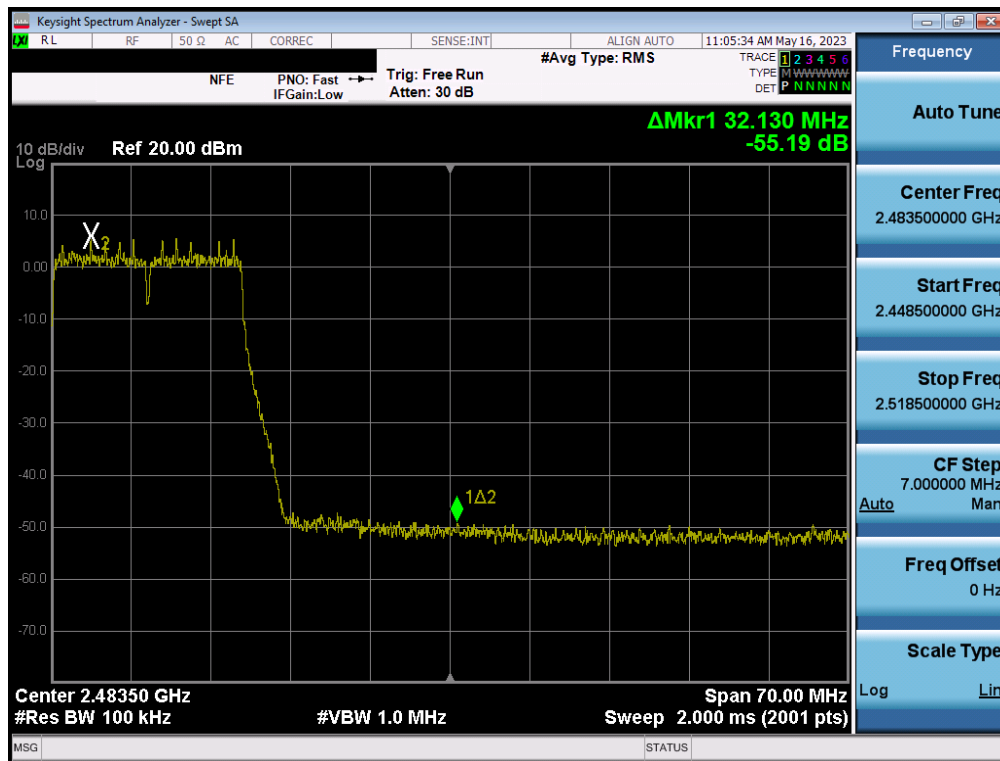


Plot 7-79. Band Edge Plot SISO ANT2 (802.11g – Ch. 10)

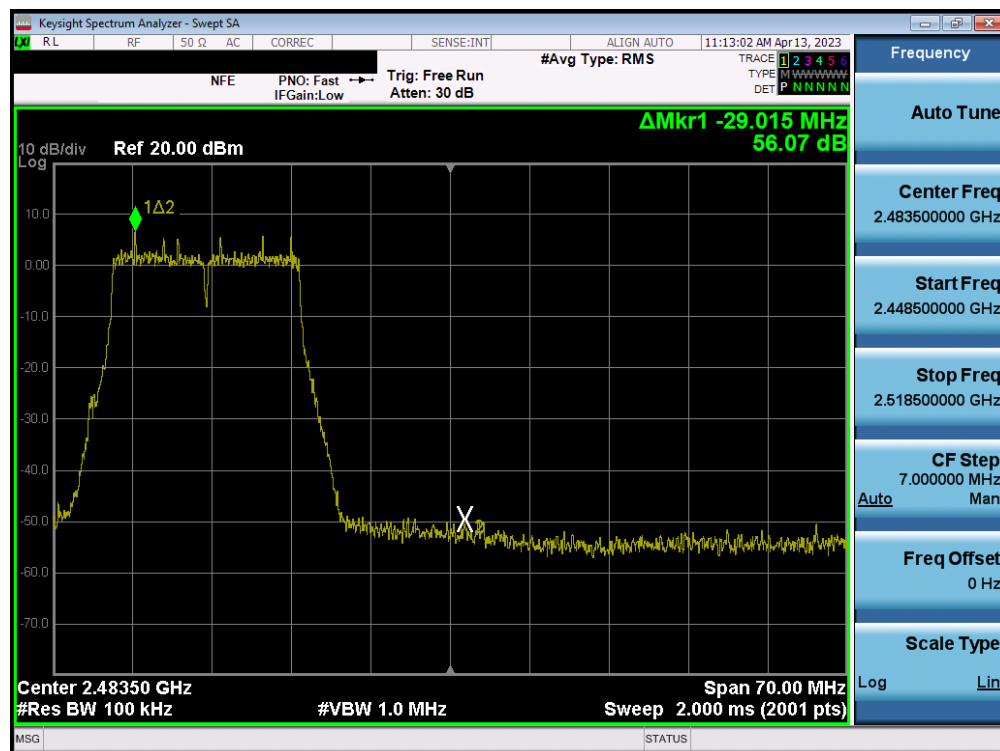


Plot 7-80. Band Edge Plot SISO ANT2 (802.11g – Ch. 11)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 68 of 135

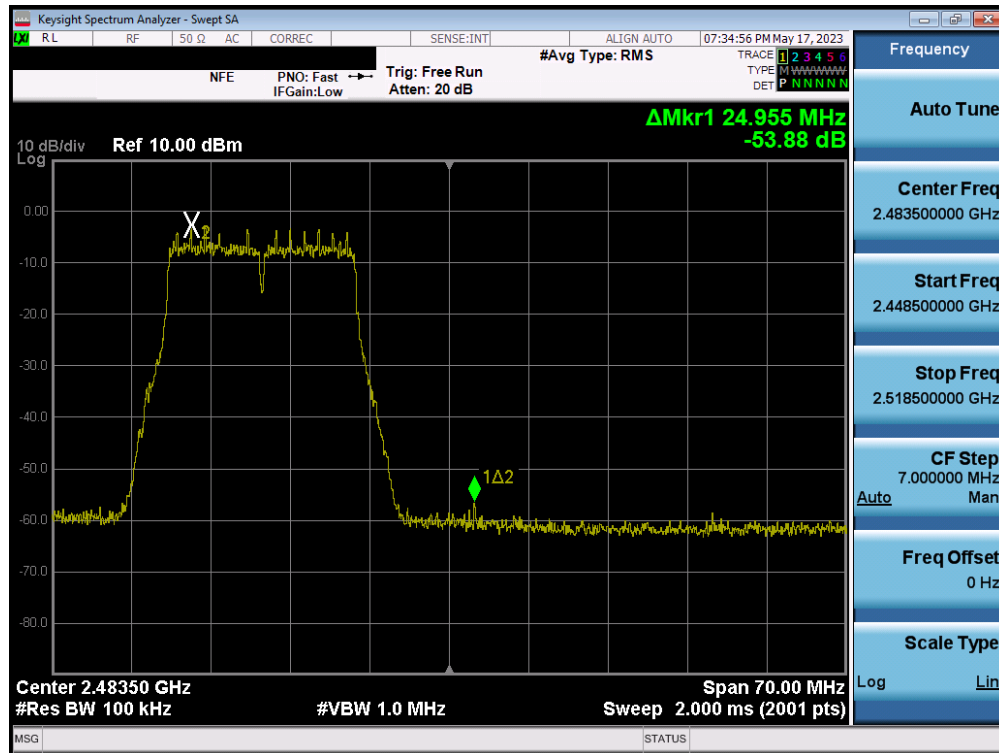


Plot 7-81. Band Edge Plot SISO ANT2 (802.11g – Ch. 12)

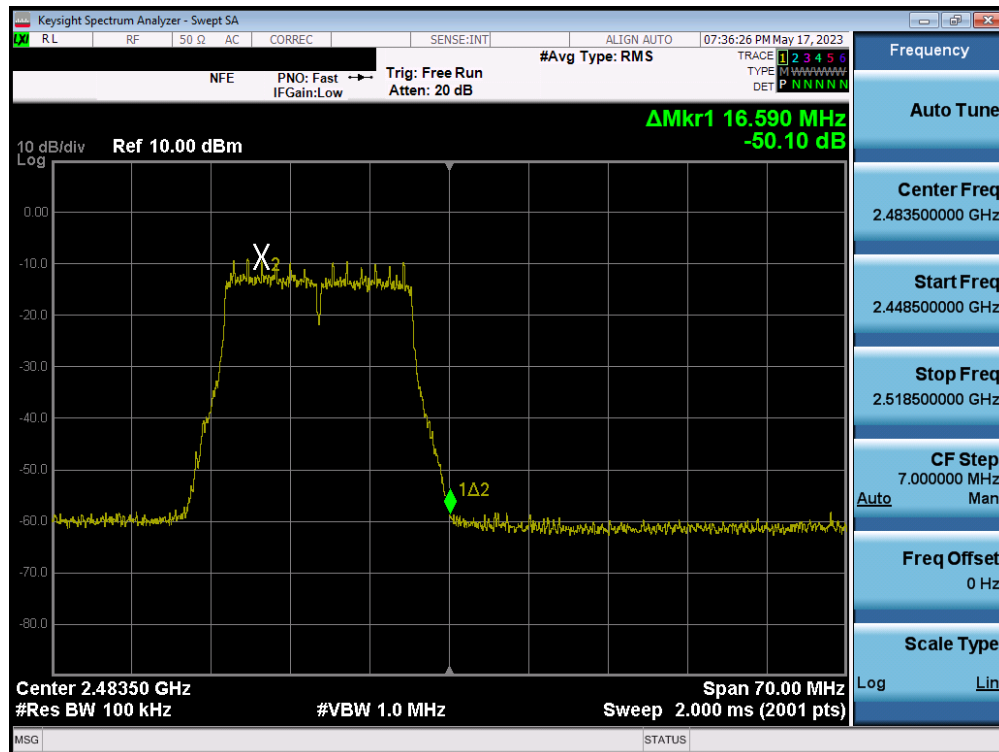


Plot 7-82. Band Edge Plot SISO ANT2 (802.11g – Ch. 13)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 69 of 135

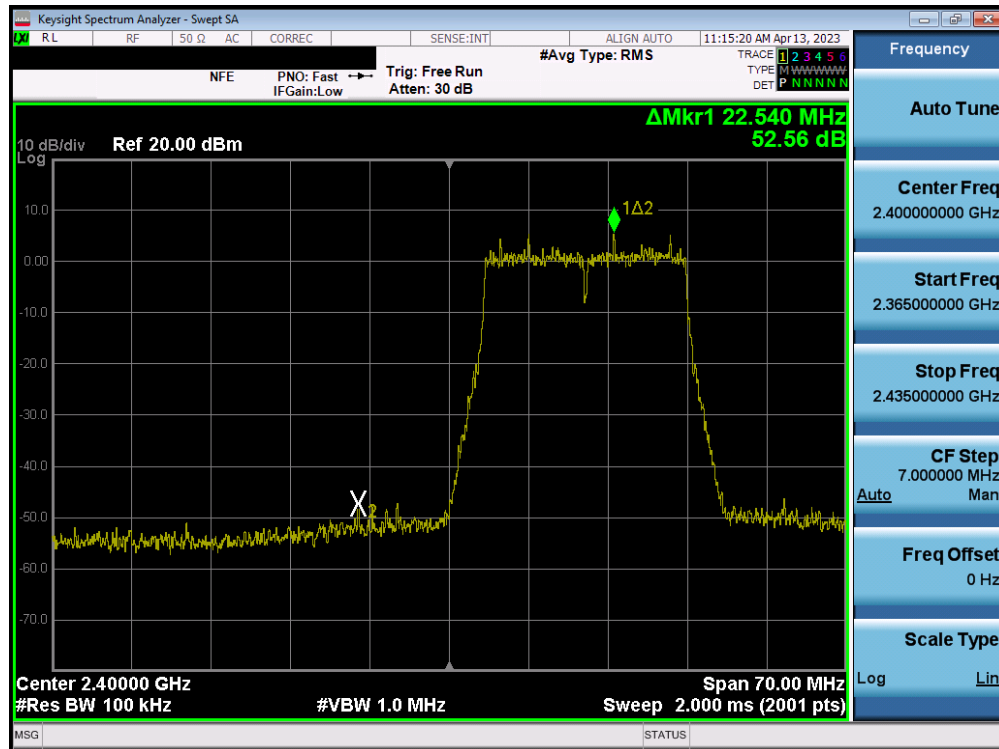


Plot 7-83. Band Edge Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 1)

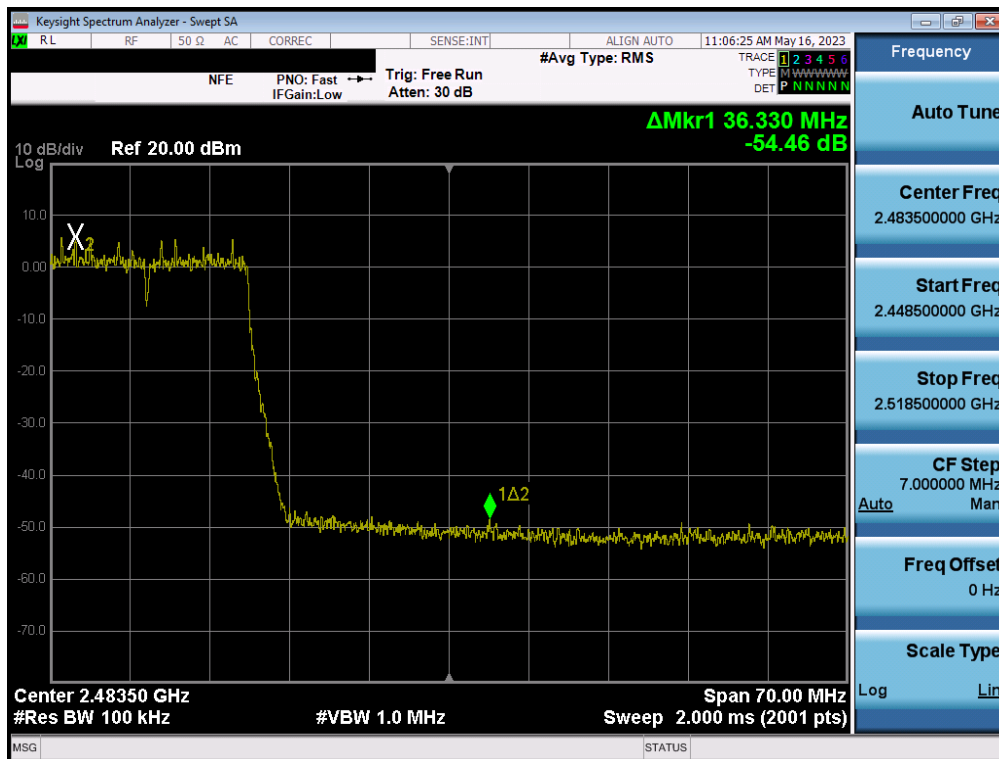


Plot 7-84. Band Edge Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 10)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 70 of 135

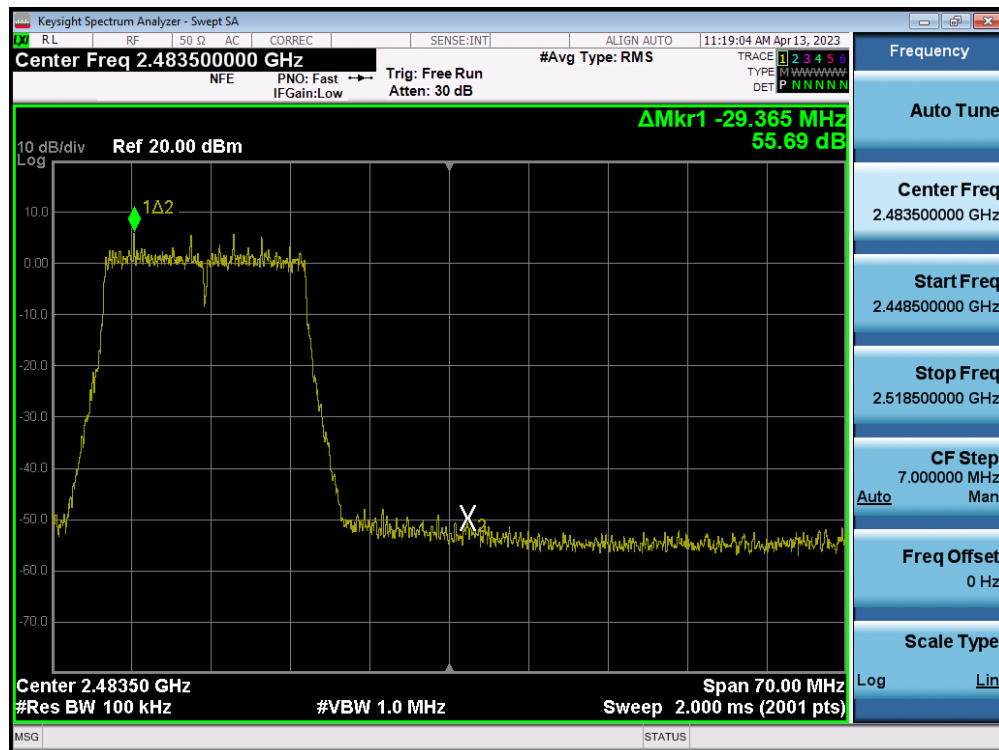


Plot 7-85. Band Edge Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 11)

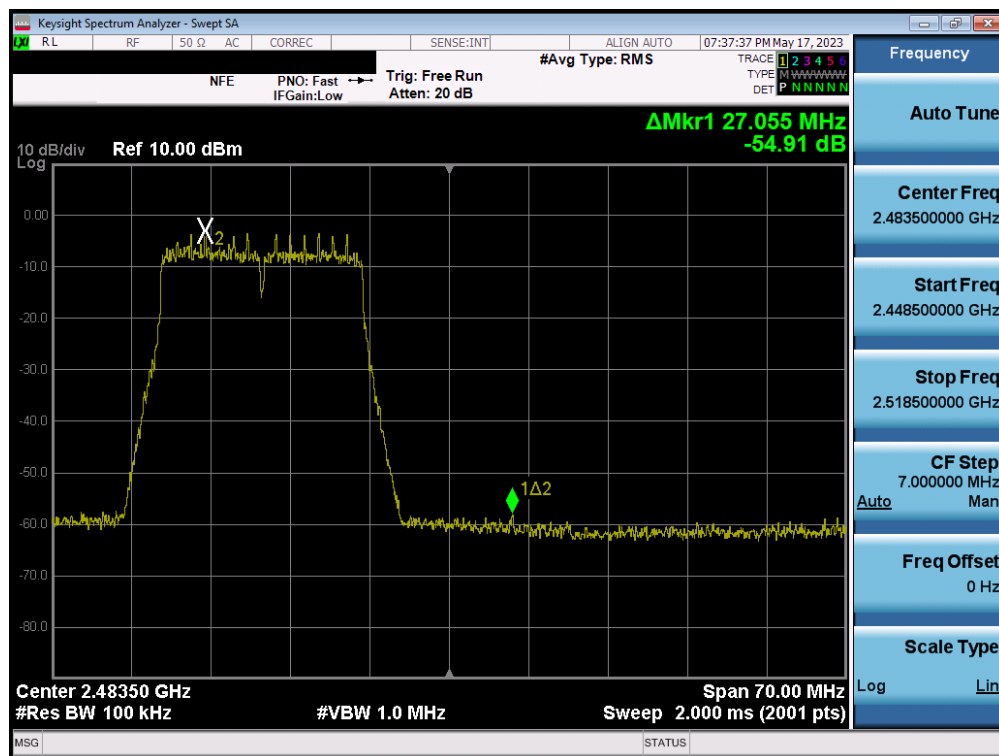


Plot 7-86. Band Edge Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 12)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 71 of 135

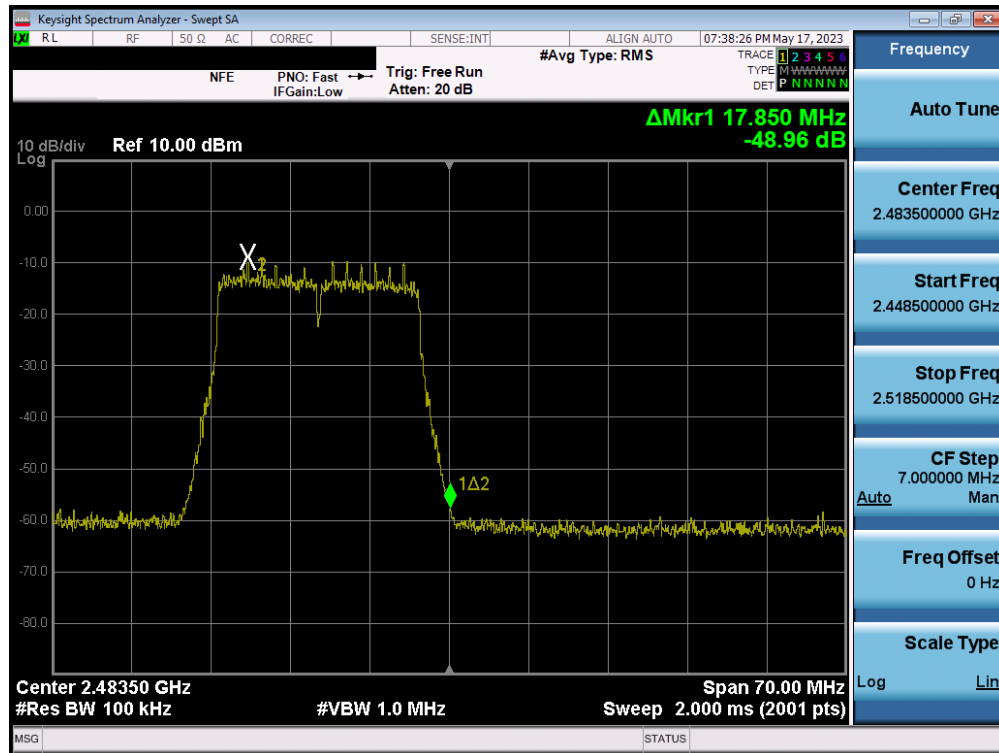


Plot 7-87. Band Edge Plot SISO ANT2 (802.11n (2.4GHz) – Ch. 13)

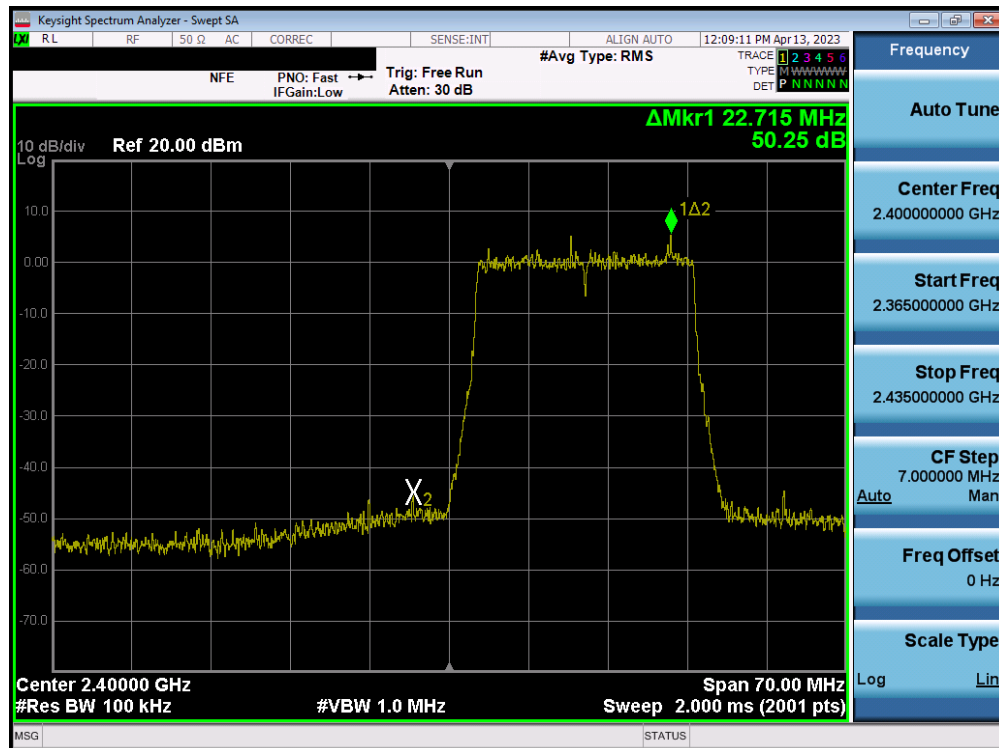


Plot 7-88. Band Edge Plot SISO ANT2 (802.11ax (2.4GHz) – Ch. 1)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 72 of 135

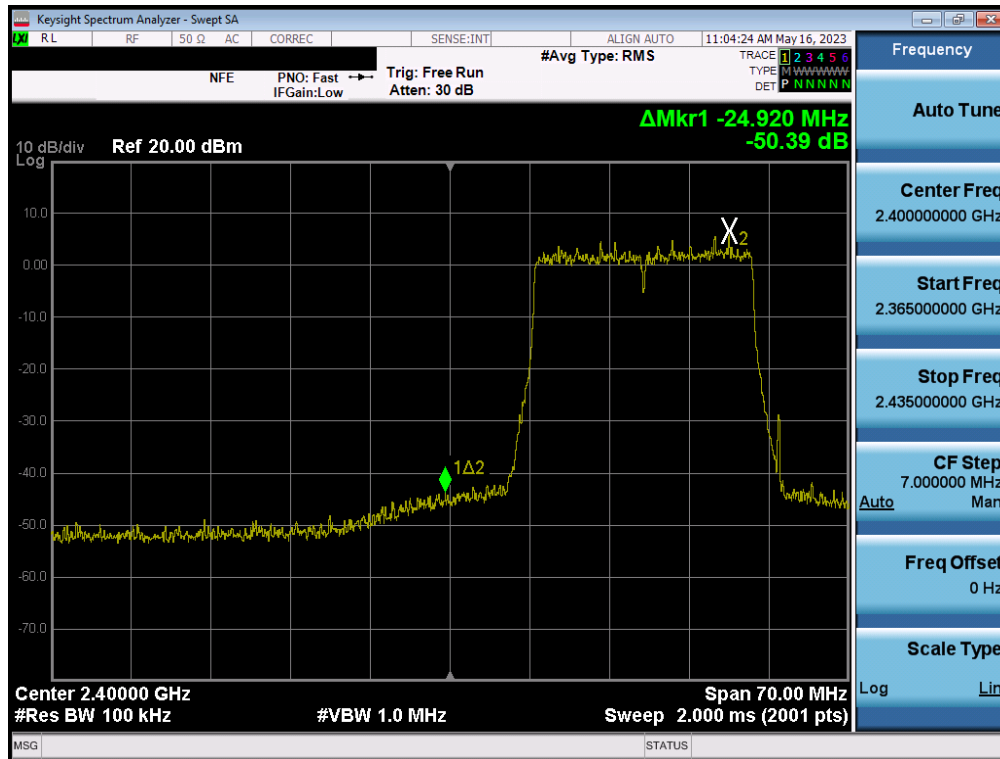


Plot 7-89. Band Edge Plot SISO ANT2 (802.11ax (2.4GHz) – Ch. 2)

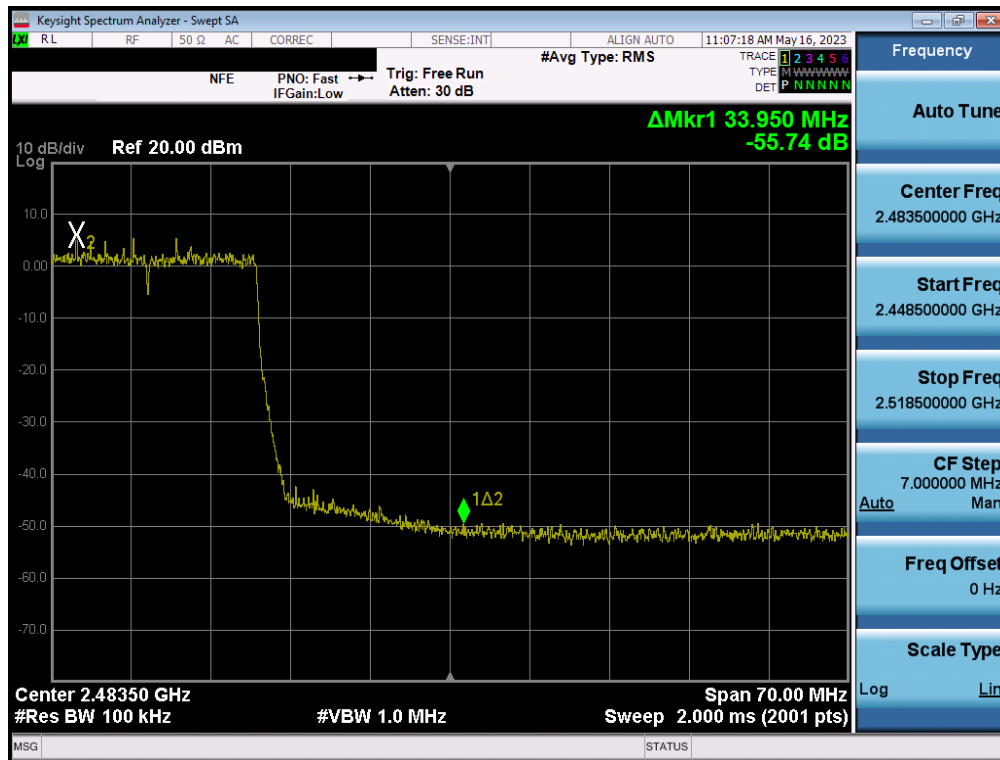


Plot 7-90. Band Edge Plot SISO ANT2 (802.11ax (2.4GHz) – Ch. 10)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 73 of 135

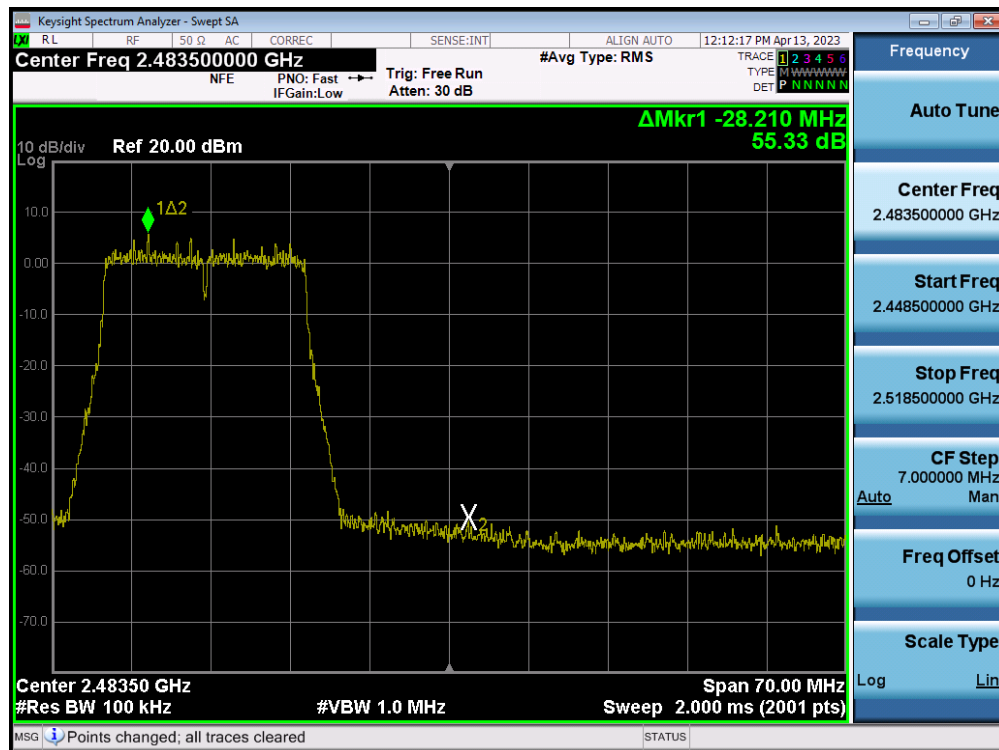


Plot 7-91. Band Edge Plot SISO ANT2 (802.11ax (2.4GHz) – Ch. 11)

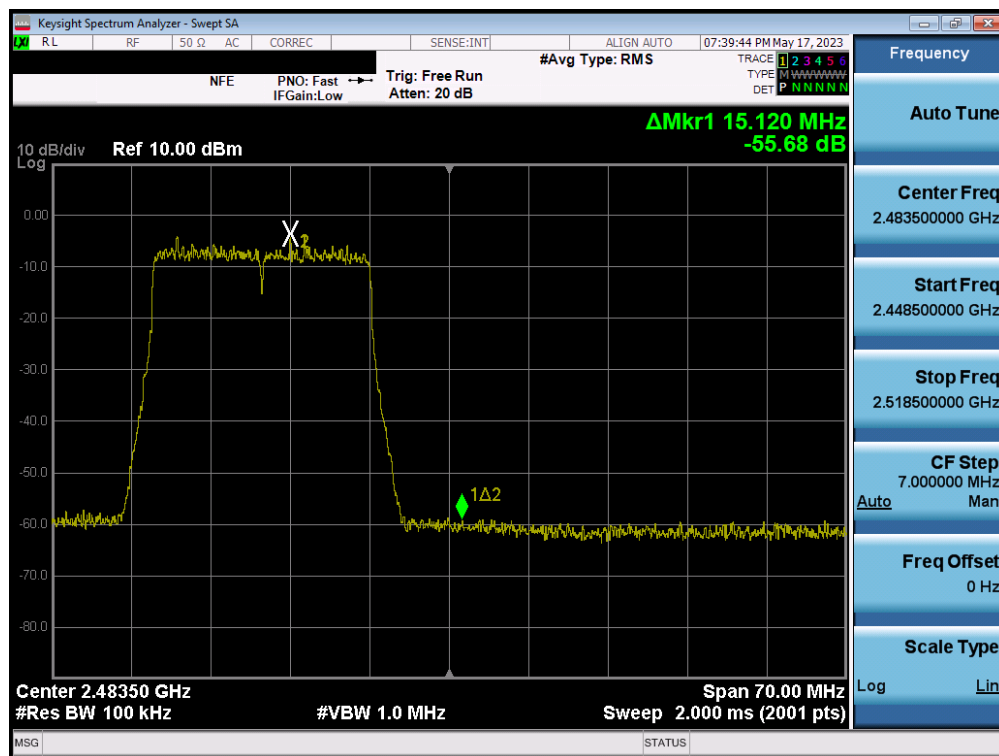


Plot 7-92. Band Edge Plot SISO ANT2 (802.11ax (2.4GHz) – Ch. 12)


FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 74 of 135

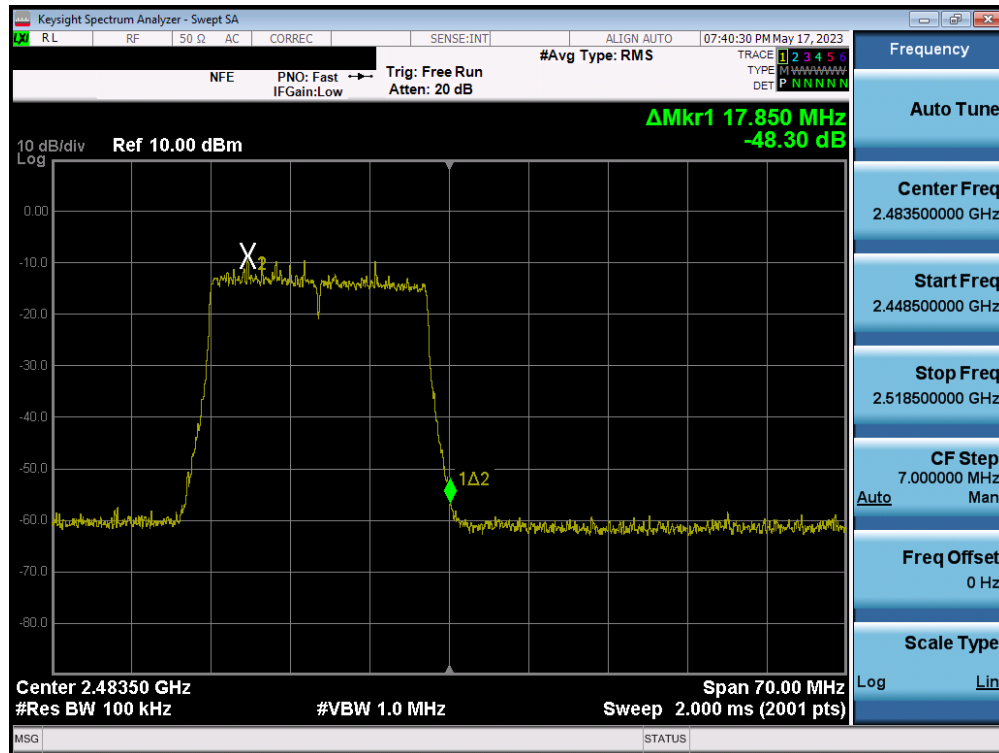

7.5.2 MIMO Antenna-1 Conducted Band Edge Emissions


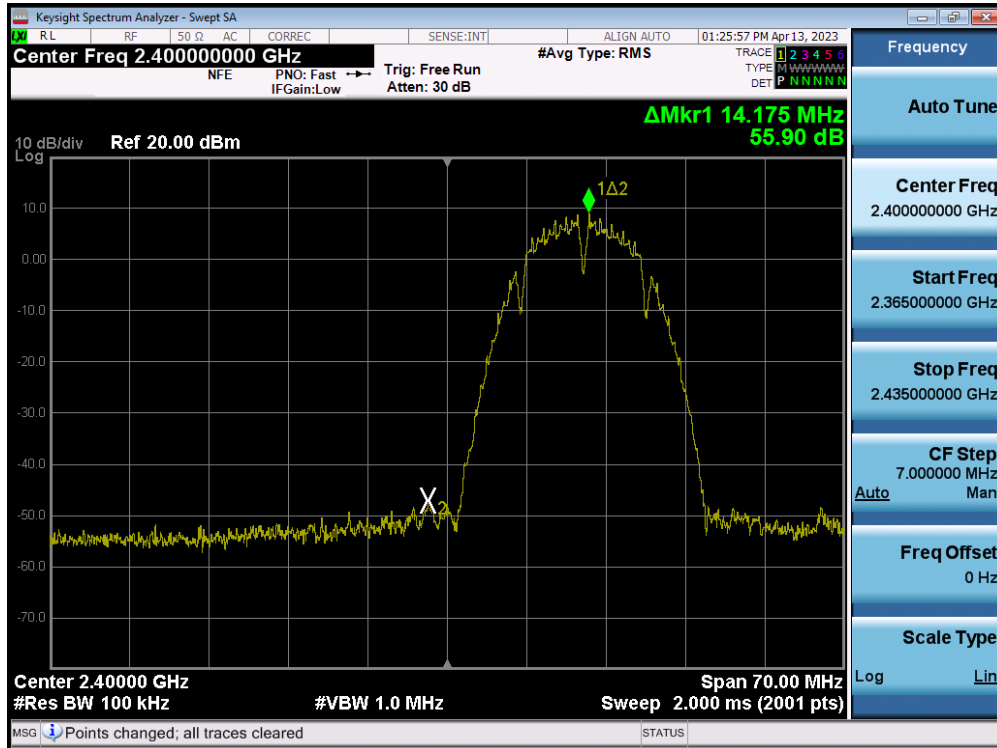


Plot 7-94. Band Edge Plot MIMO ANT1 (802.11b – Ch. 1)

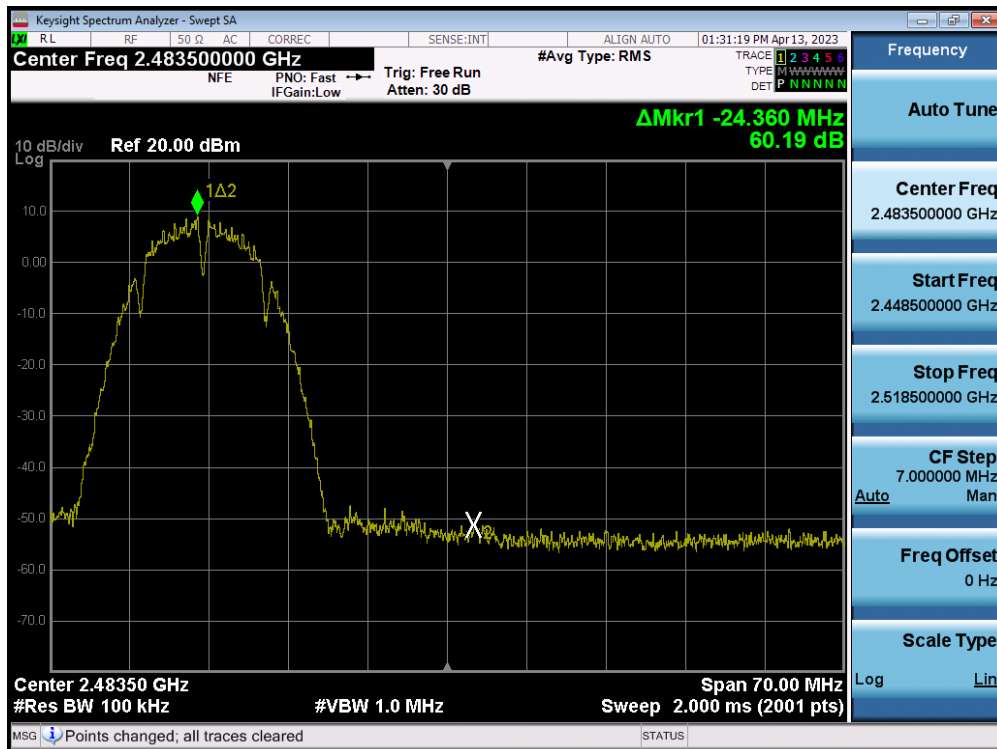


Plot 7-95. Band Edge Plot MIMO ANT1 (802.11b – Ch. 11)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 76 of 135

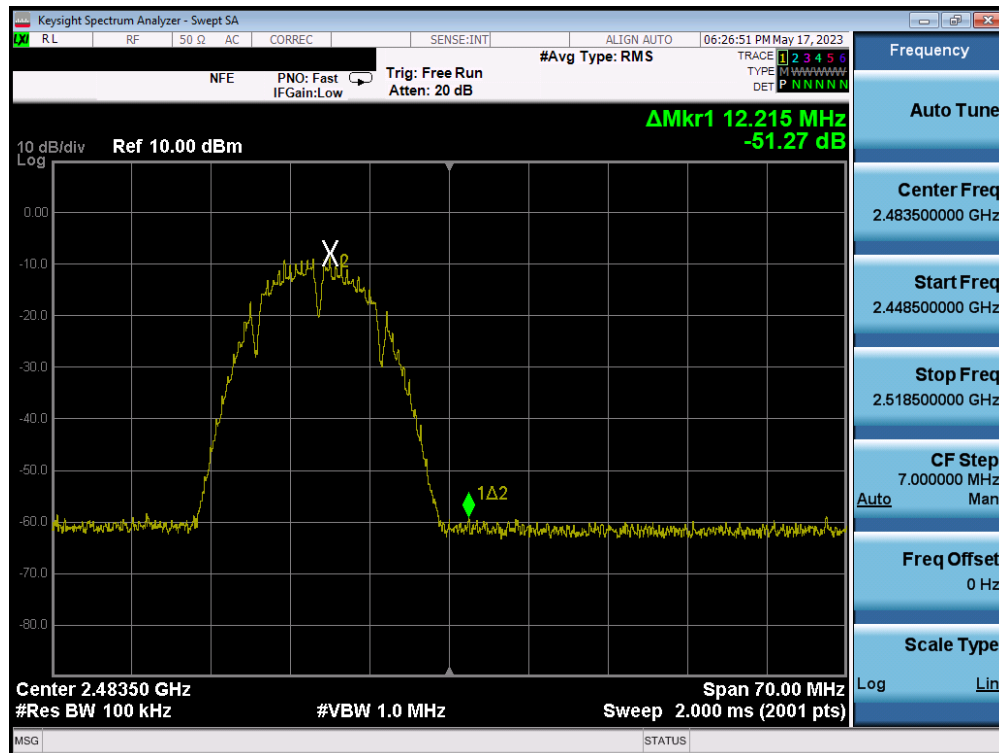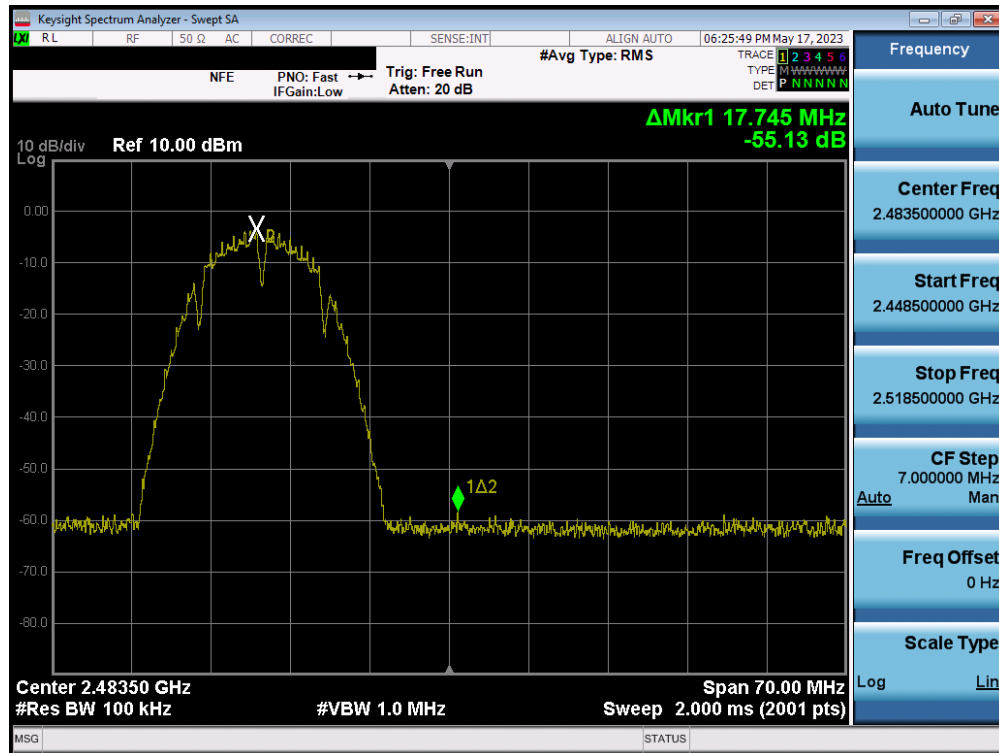

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 77 of 135

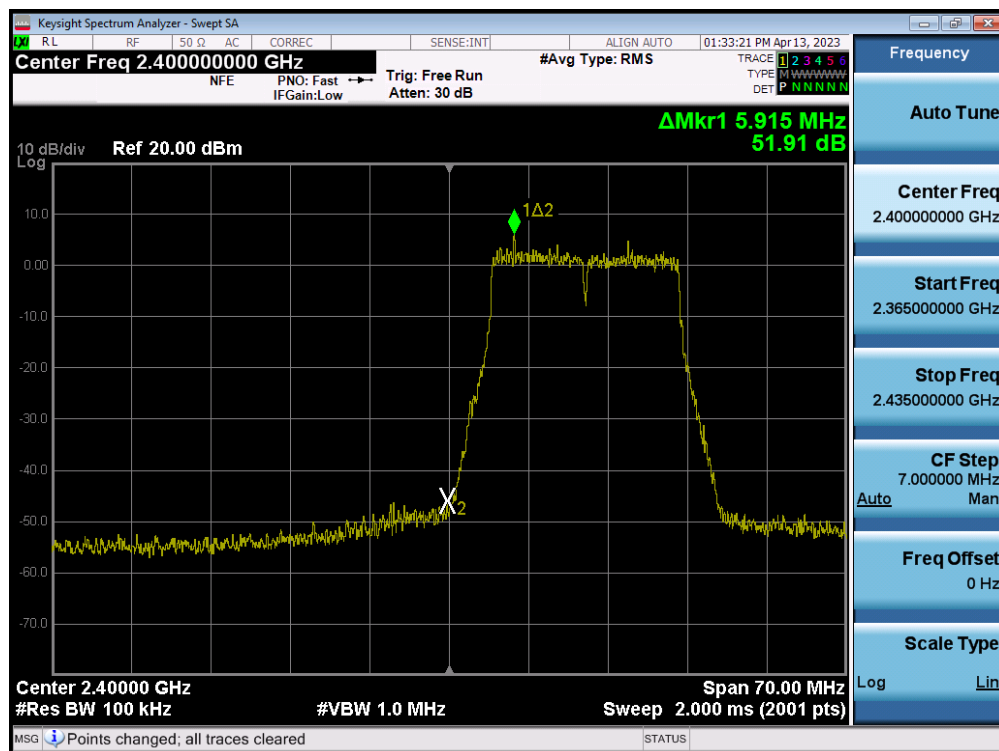

Plot 7-98. Band Edge Plot MIMO ANT1 (802.11g- Ch. 1)



Plot 7-99. Band Edge Plot MIMO ANT1 (802.11g- Ch. 2)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 78 of 135