



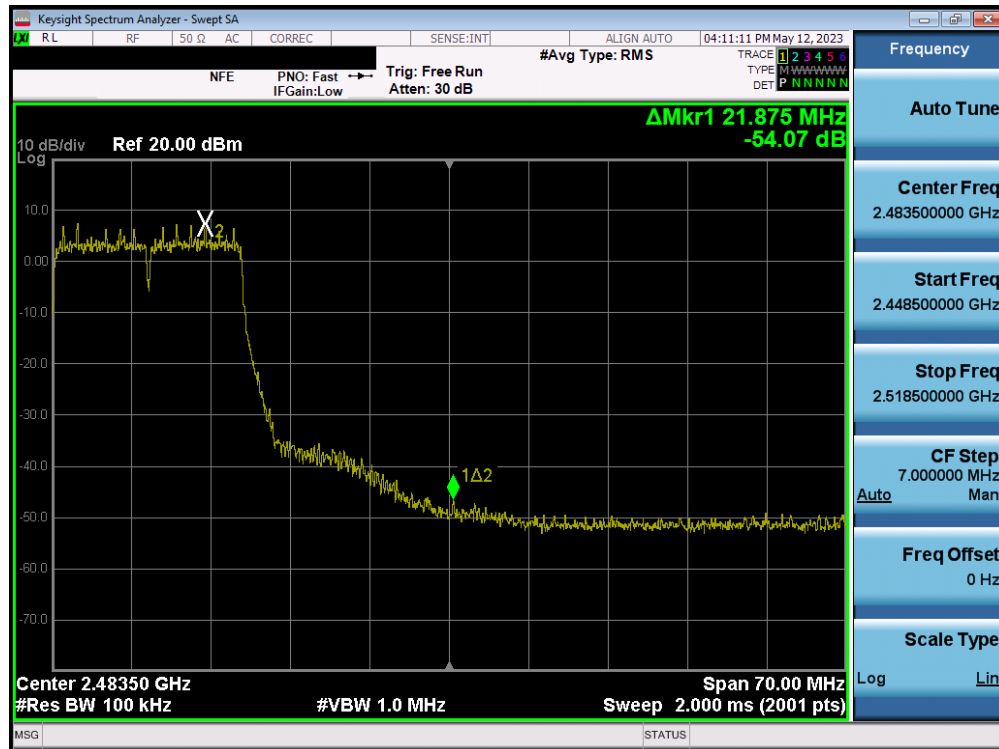


Plot 7-100. Band Edge Plot MIMO ANT1 (802.11g - Ch. 10)

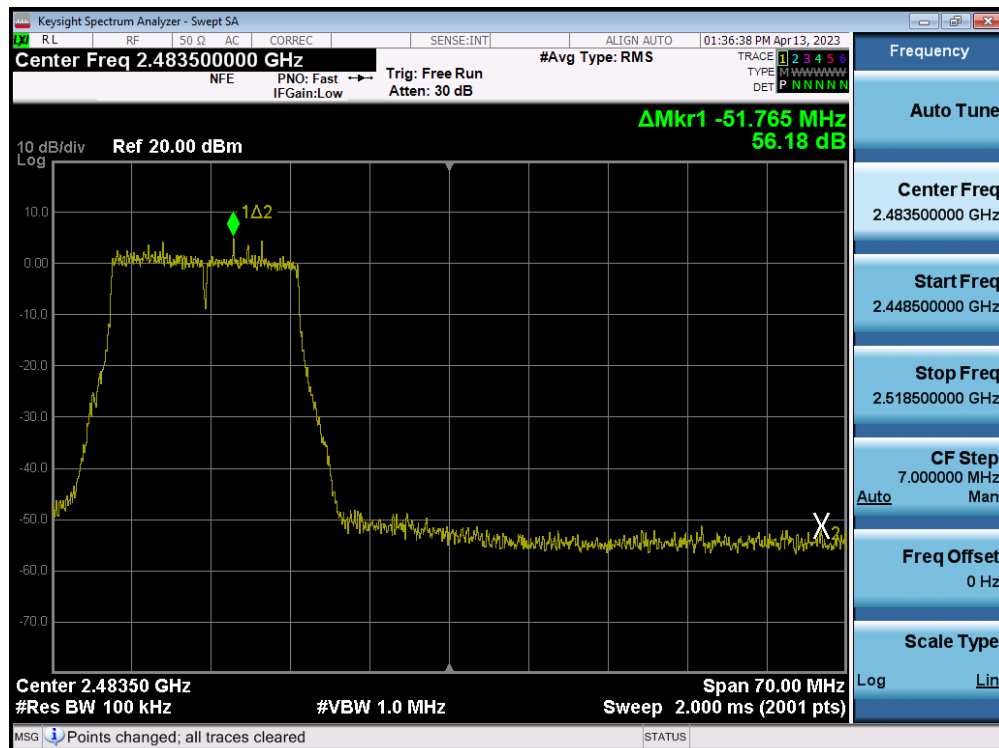


Plot 7-101. Band Edge Plot MIMO ANT1 (802.11g - Ch. 11)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 79 of 135

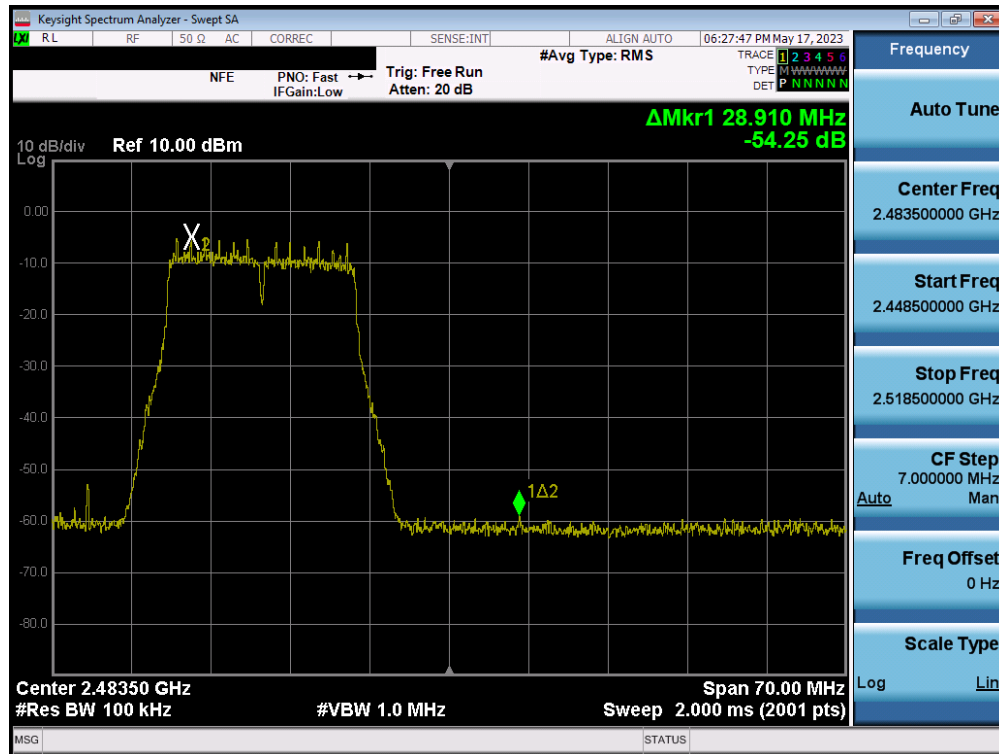


Plot 7-102. Band Edge Plot MIMO ANT1 (802.11g – Ch. 12)

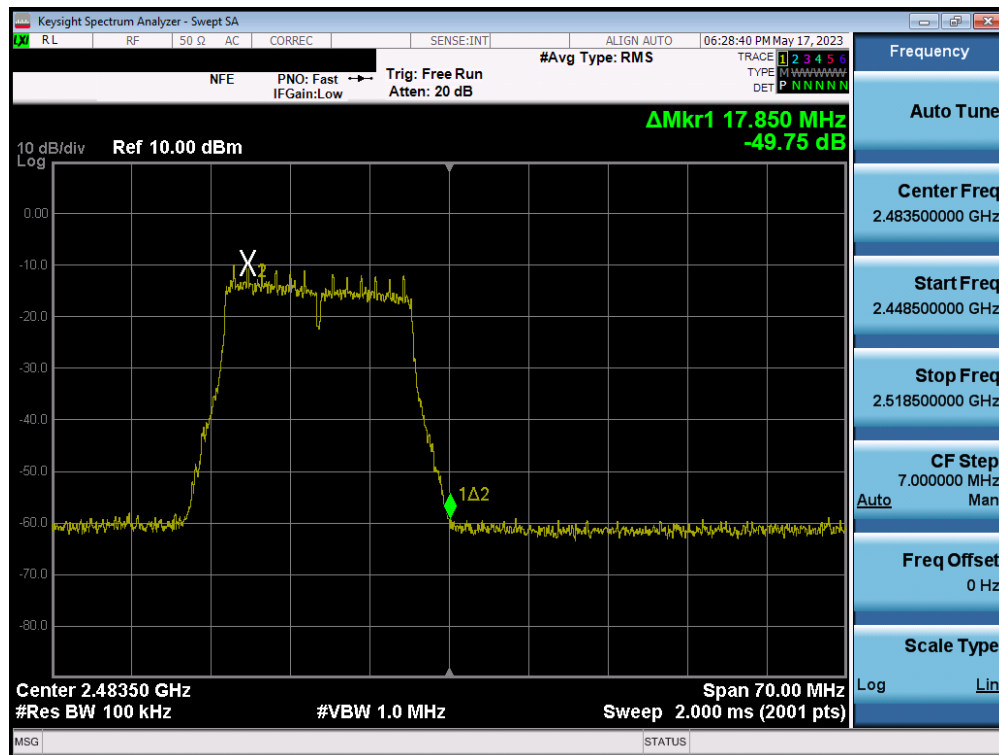


Plot 7-103. Band Edge Plot MIMO ANT1 (802.11g – Ch. 13)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 80 of 135

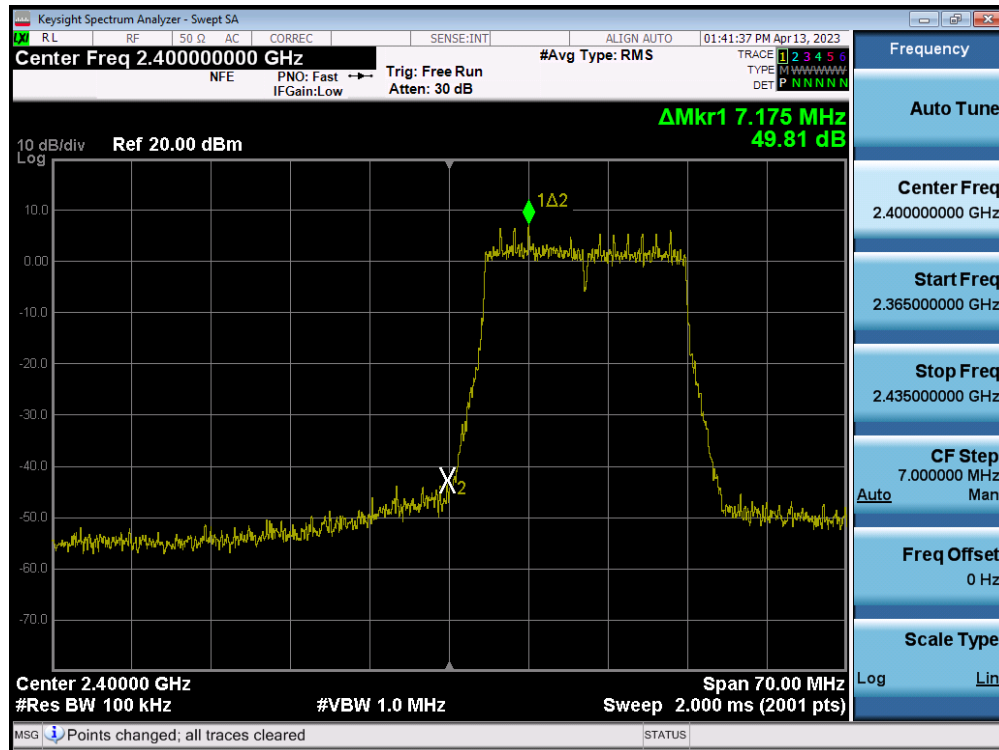


Plot 7-104. Band Edge Plot MIMO ANT1 (802.11n (2.4GHz) – Ch. 1)

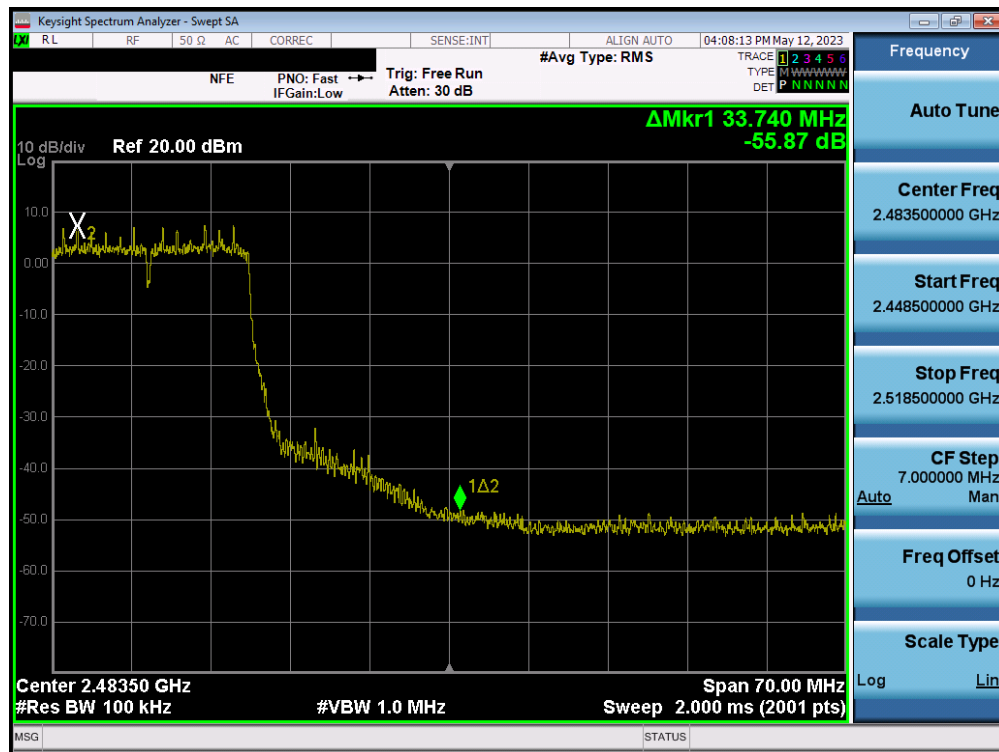


Plot 7-105. Band Edge Plot MIMO ANT1 (802.11n (2.4GHz) – Ch. 10)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 81 of 135

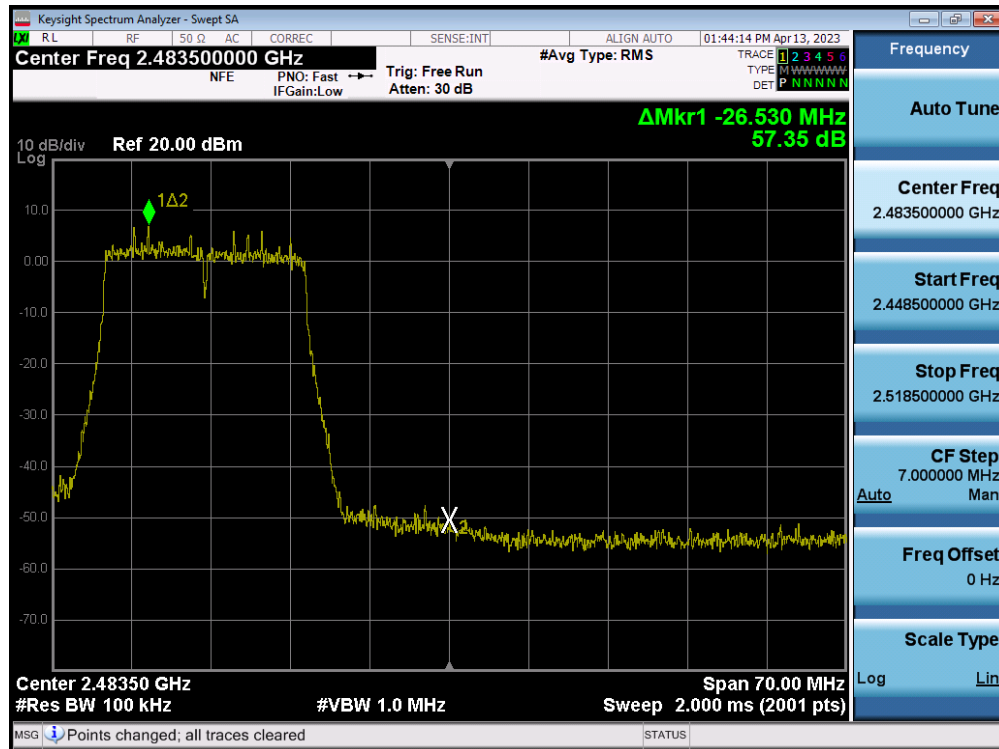


Plot 7-106. Band Edge Plot MIMO ANT1 (802.11n (2.4GHz) – Ch. 11)

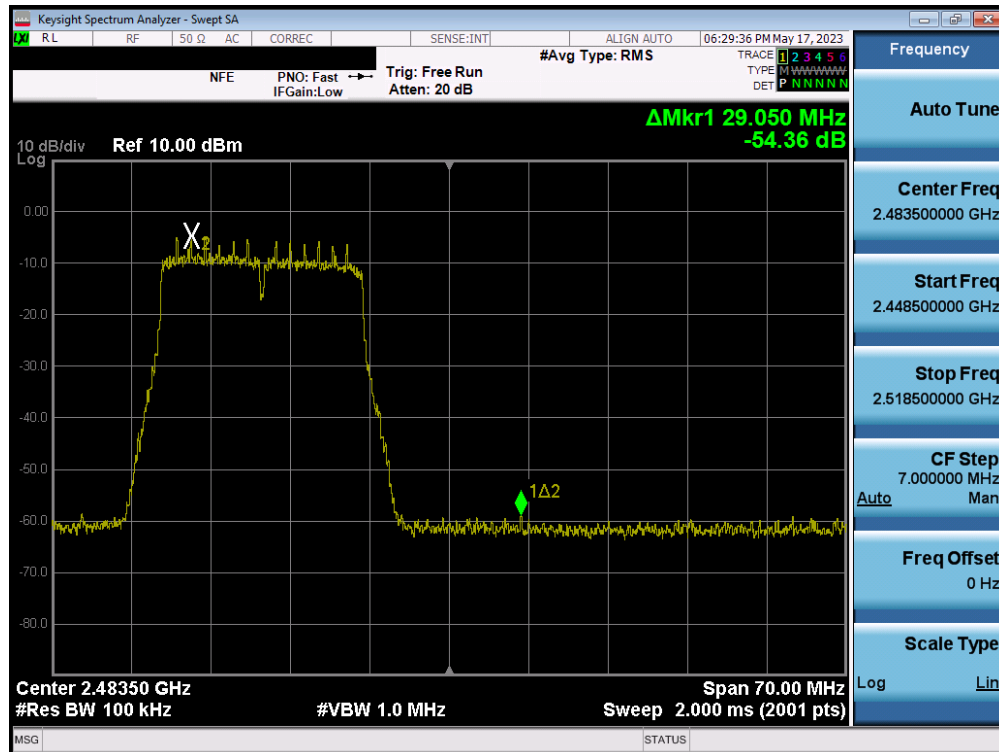


Plot 7-107. Band Edge Plot MIMO ANT1 (802.11n (2.4GHz) – Ch. 12)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 82 of 135

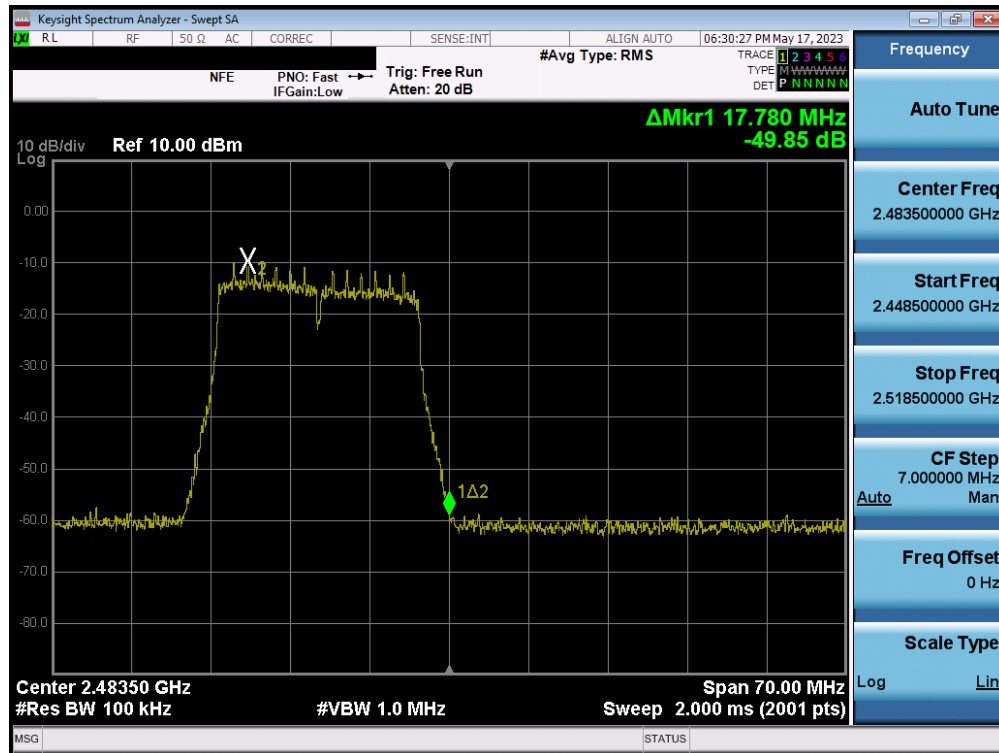


Plot 7-108. Band Edge Plot MIMO ANT1 (802.11n (2.4GHz) – Ch. 13)

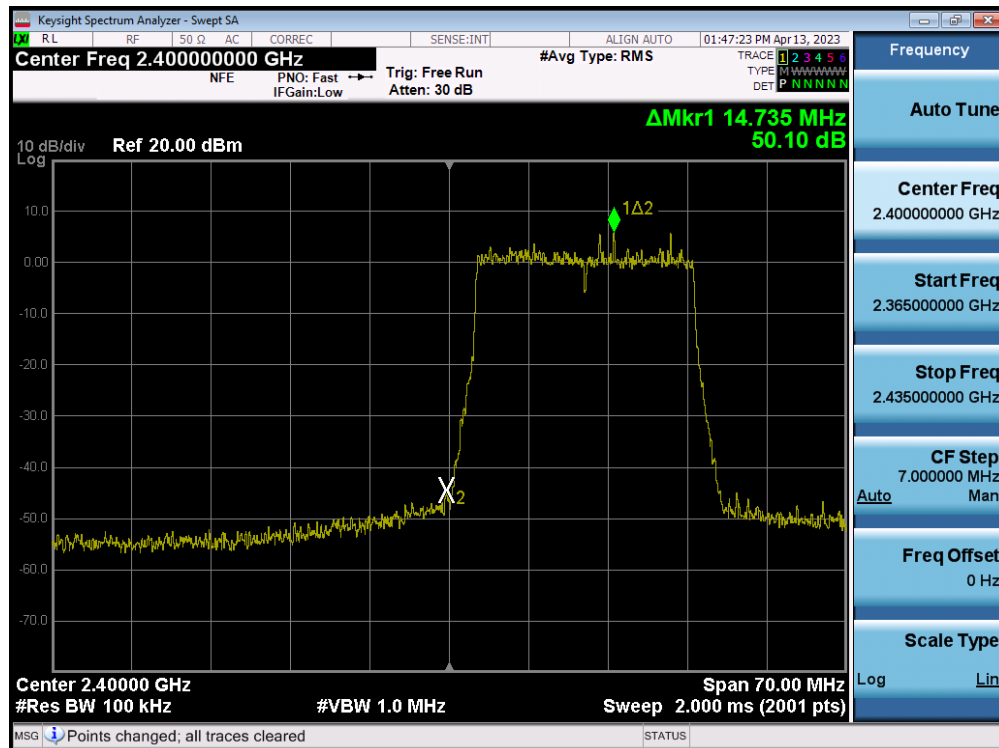


Plot 7-109. Band Edge Plot MIMO ANT1 (802.11ax (2.4GHz) – Ch. 1)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 83 of 135

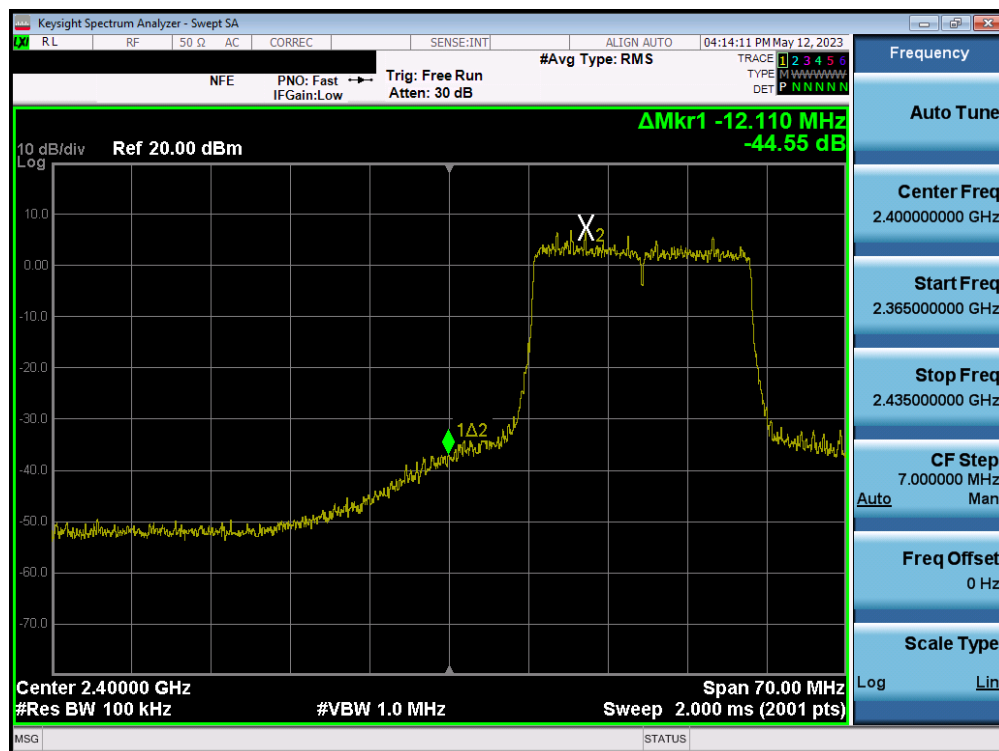


Plot 7-110. Band Edge Plot MIMO ANT1 (802.11ax (2.4GHz) – Ch. 2)

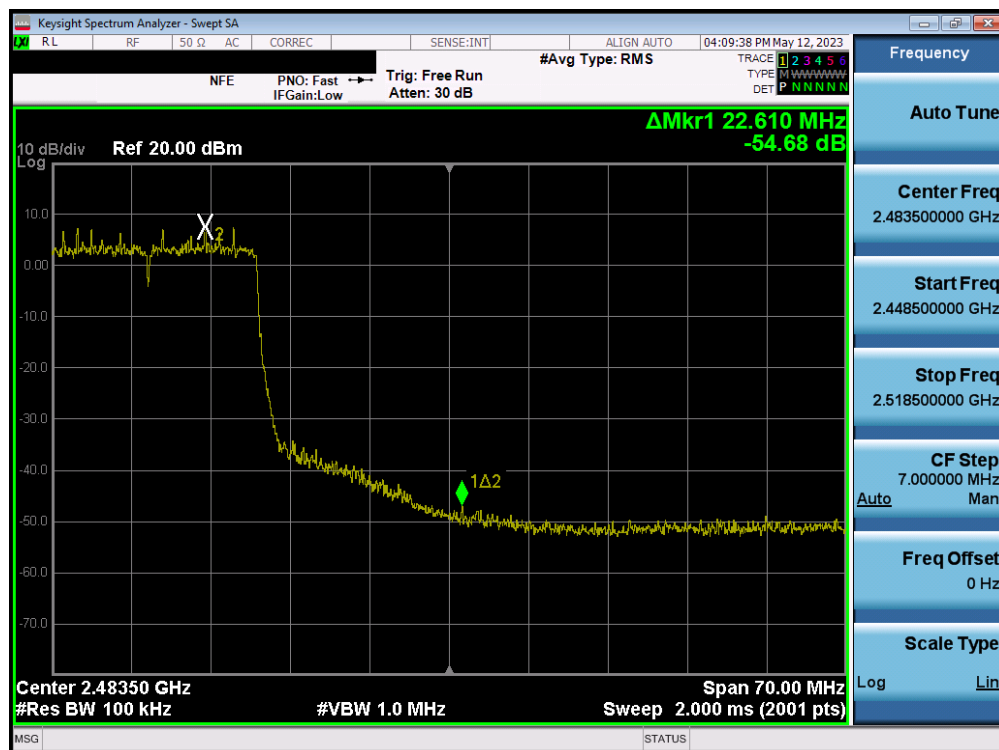


Plot 7-111. Band Edge Plot MIMO ANT1 (802.11ax (2.4GHz) – Ch. 10)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 84 of 135

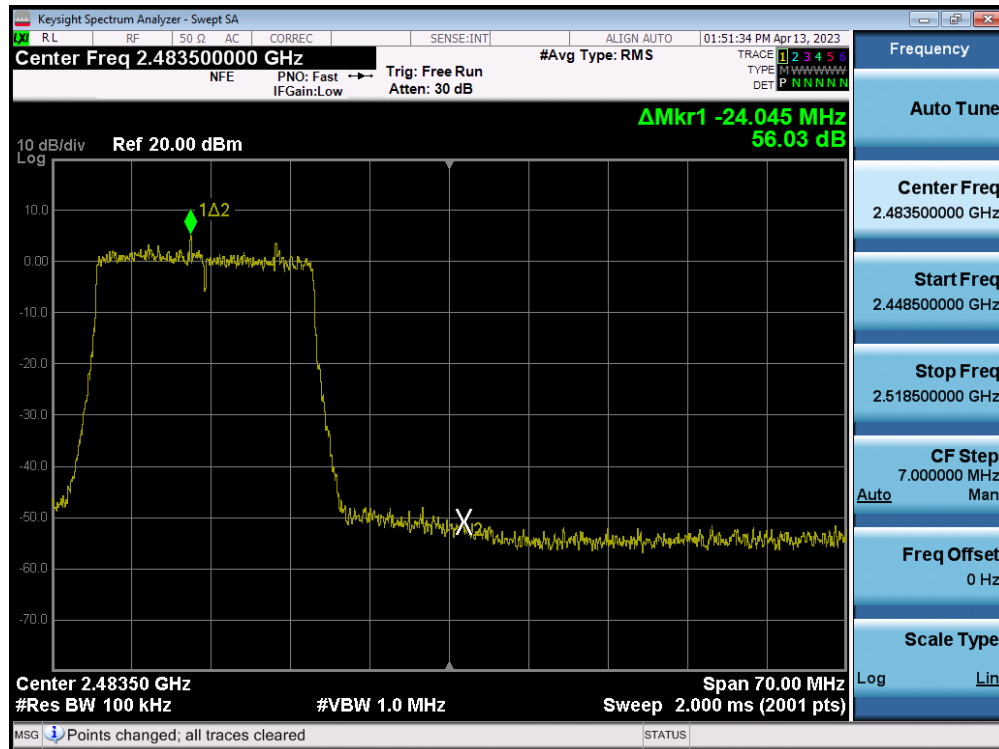


Plot 7-112. Band Edge Plot MIMO ANT1 (802.11ax (2.4GHz) – Ch. 11)

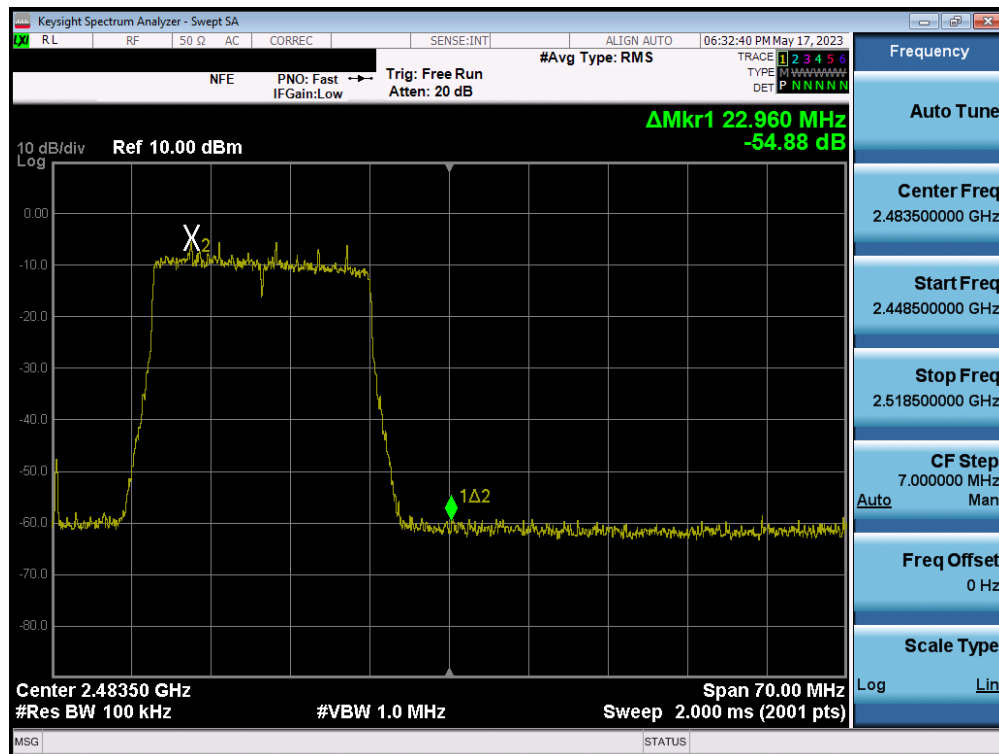

Plot 7-113. Band Edge Plot MIMO ANT1 (802.11ax (2.4GHz) – Ch. 12)


FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 85 of 135

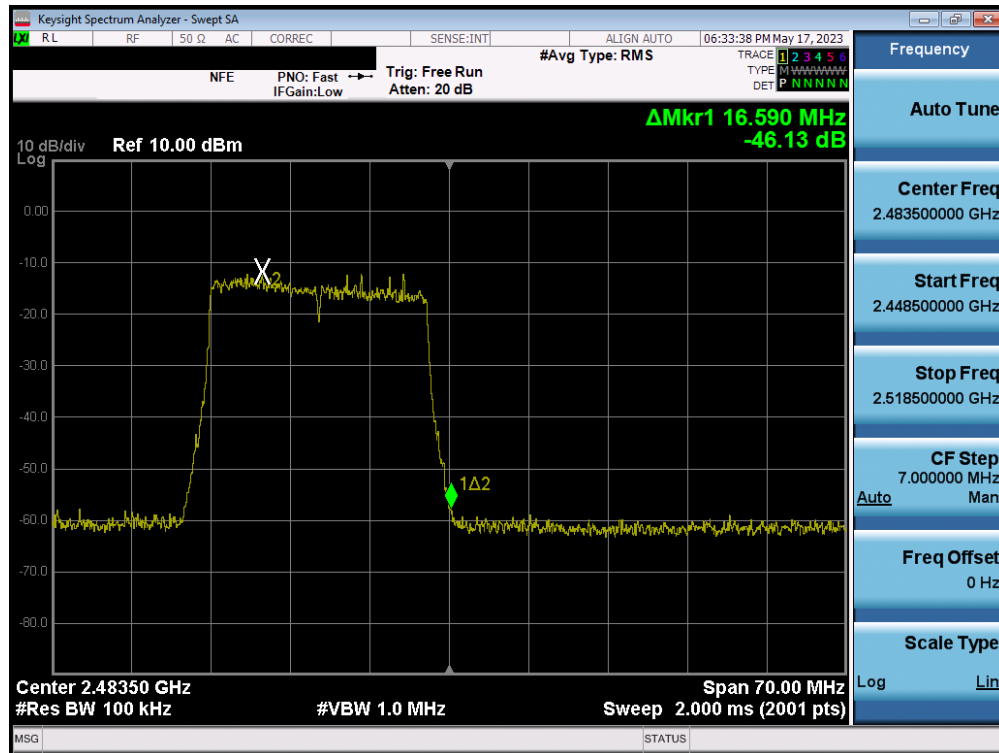


Plot 7-114. Band Edge Plot MIMO ANT1 (802.11ax (2.4GHz) – Ch. 13)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 86 of 135

7.5.3 MIMO Antenna-2 Conducted Band Edge Emissions

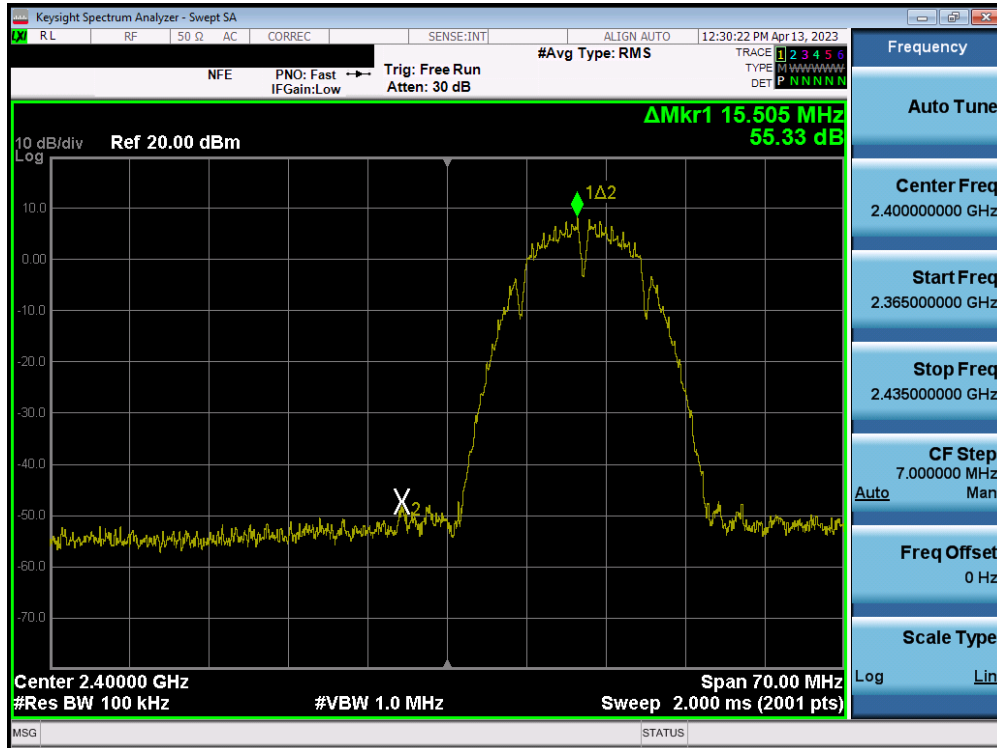


Plot 7-115. Band Edge Plot MIMO ANT2 (802.11b – Ch. 1)

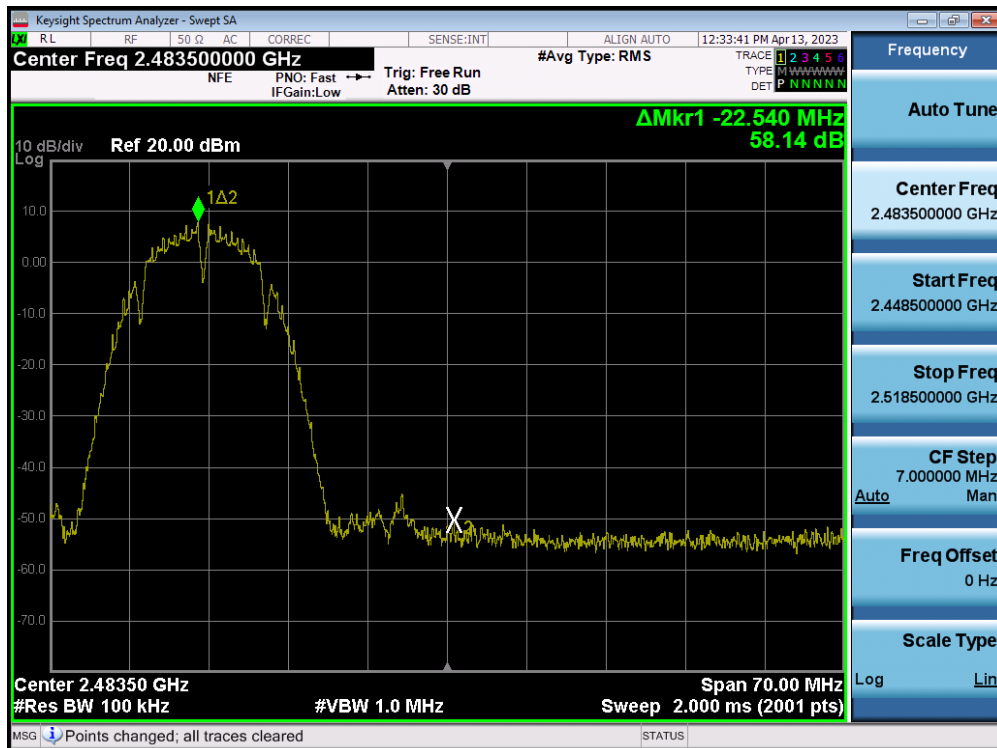


Plot 7-116. Band Edge Plot MIMO ANT2 (802.11b – Ch. 11)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 87 of 135

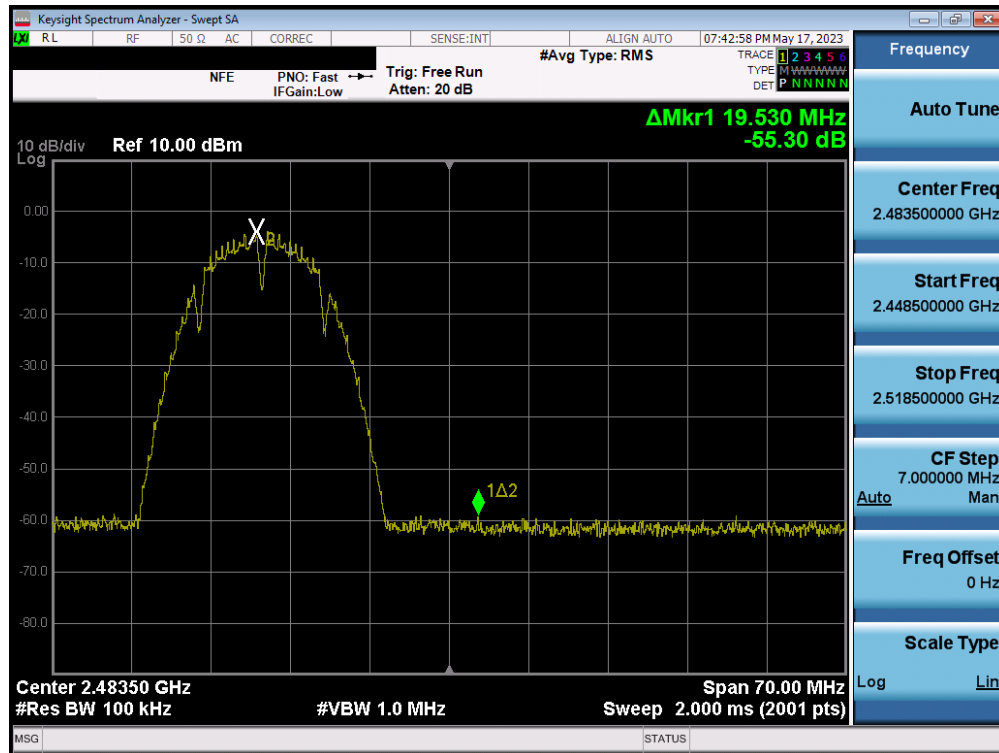


Plot 7-117. Band Edge Plot MIMO ANT2 (802.11b – Ch. 12)

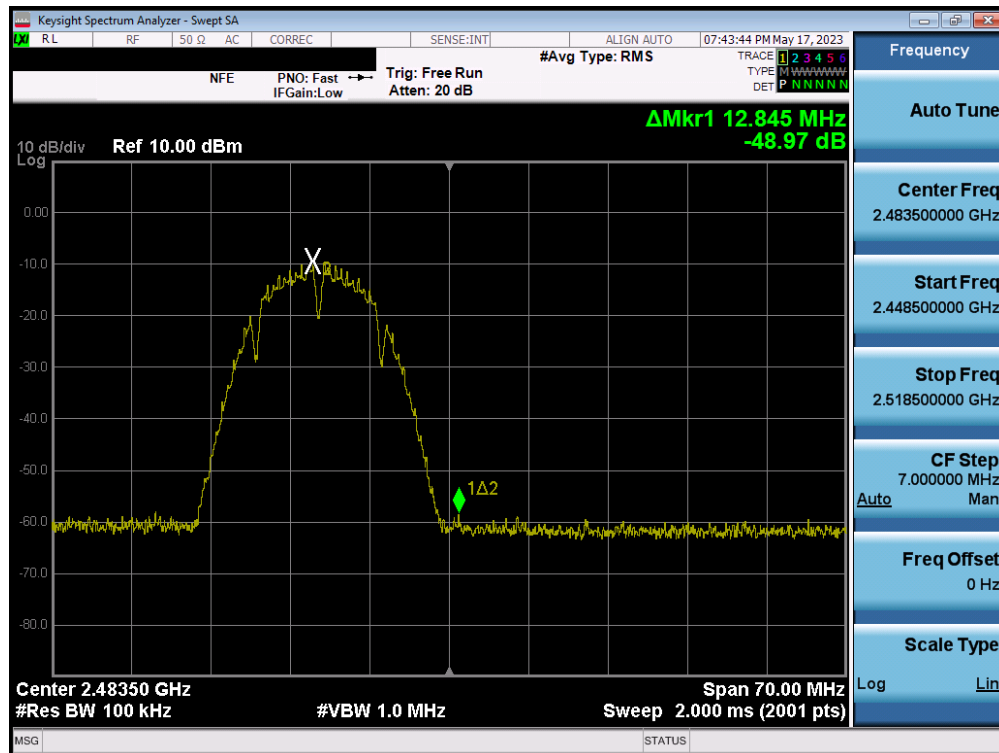


Plot 7-118. Band Edge Plot MIMO ANT2 (802.11b – Ch. 13)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 88 of 135

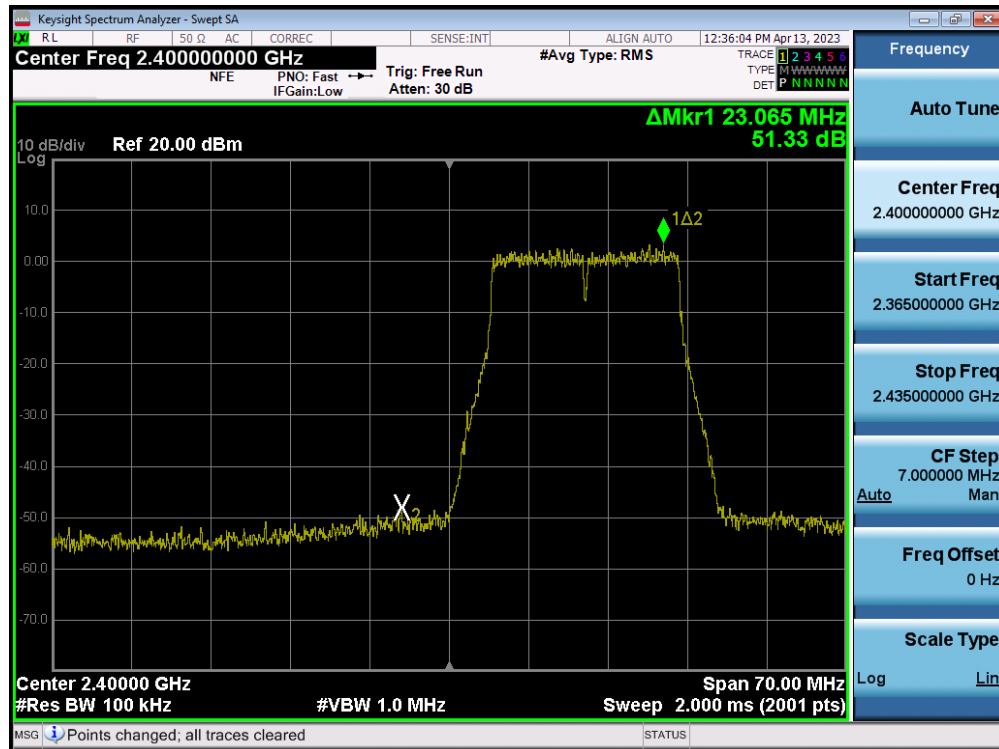

Plot 7-119. Band Edge Plot MIMO ANT2 (802.11g- Ch. 1)

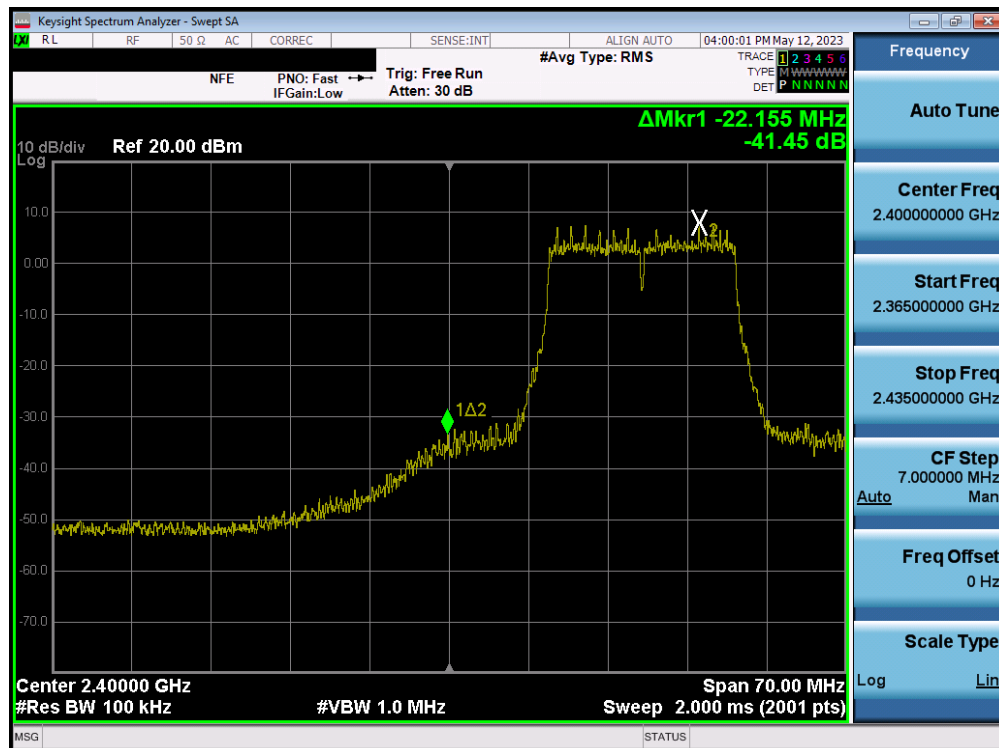


Plot 7-120. Band Edge Plot MIMO ANT2 (802.11g- Ch. 2)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 89 of 135




Plot 7-121. Band Edge Plot MIMO ANT2 (802.11g – Ch. 10)

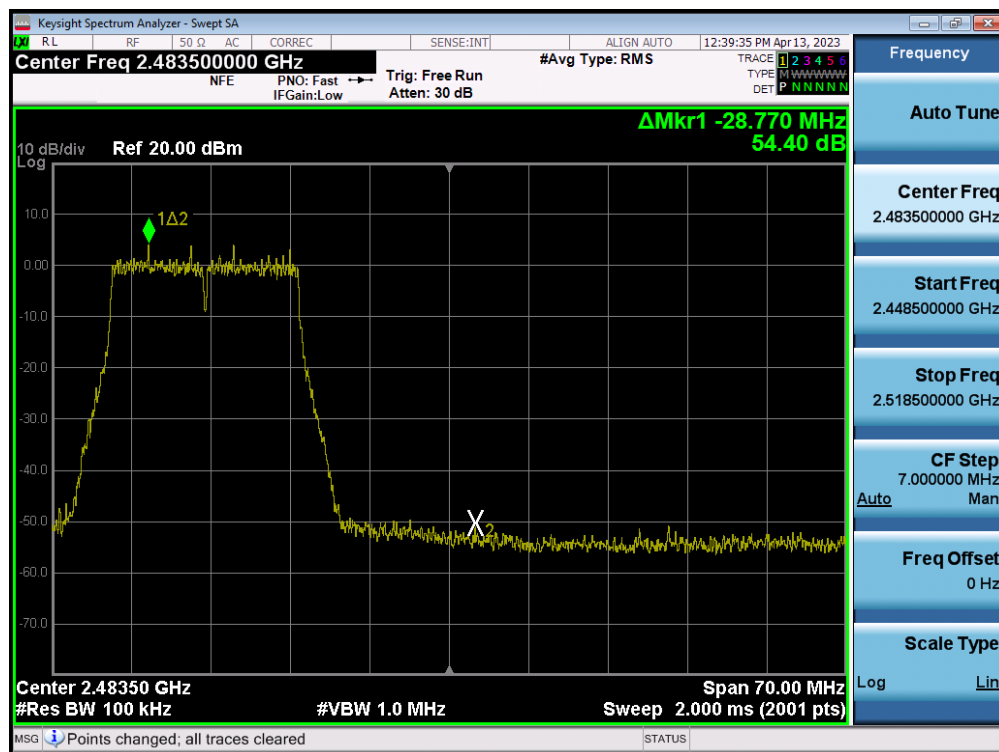


Plot 7-122. Band Edge Plot MIMO ANT2 (802.11g – Ch. 11)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 90 of 135

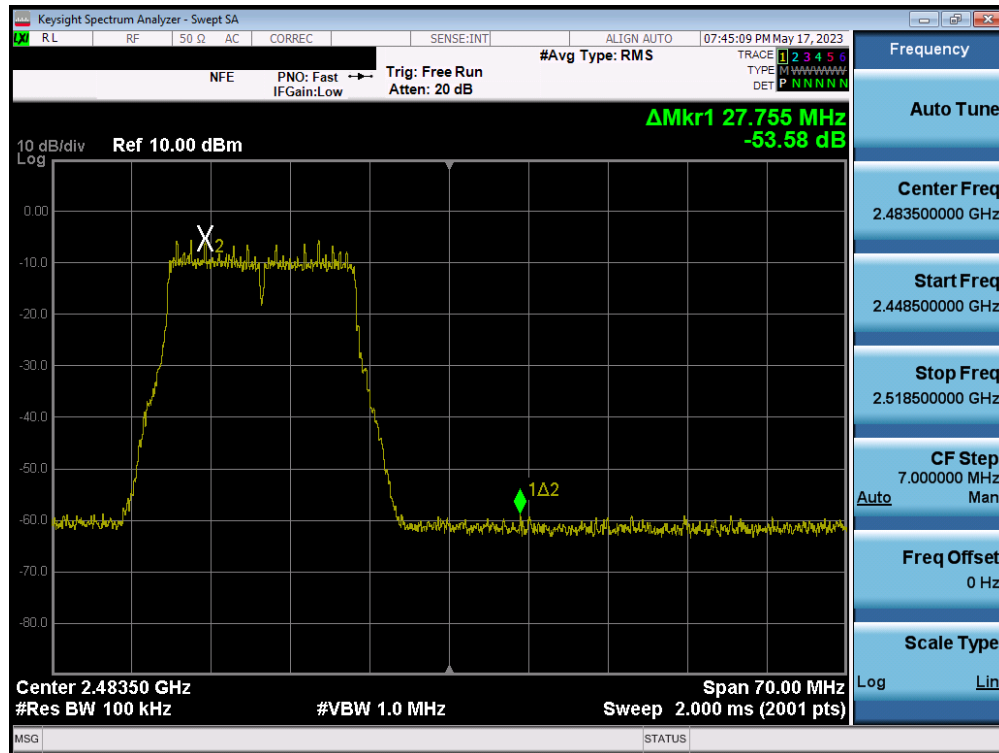


Plot 7-123. Band Edge Plot MIMO ANT2 (802.11g – Ch. 12)

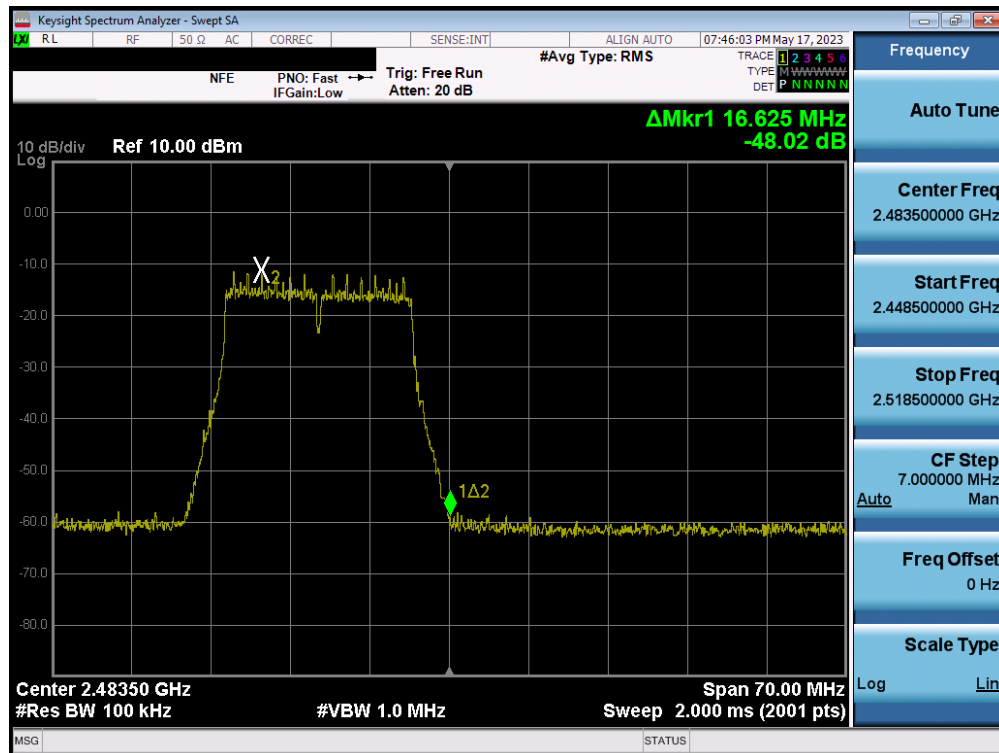

Plot 7-124. Band Edge Plot MIMO ANT2 (802.11g – Ch. 13)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 91 of 135

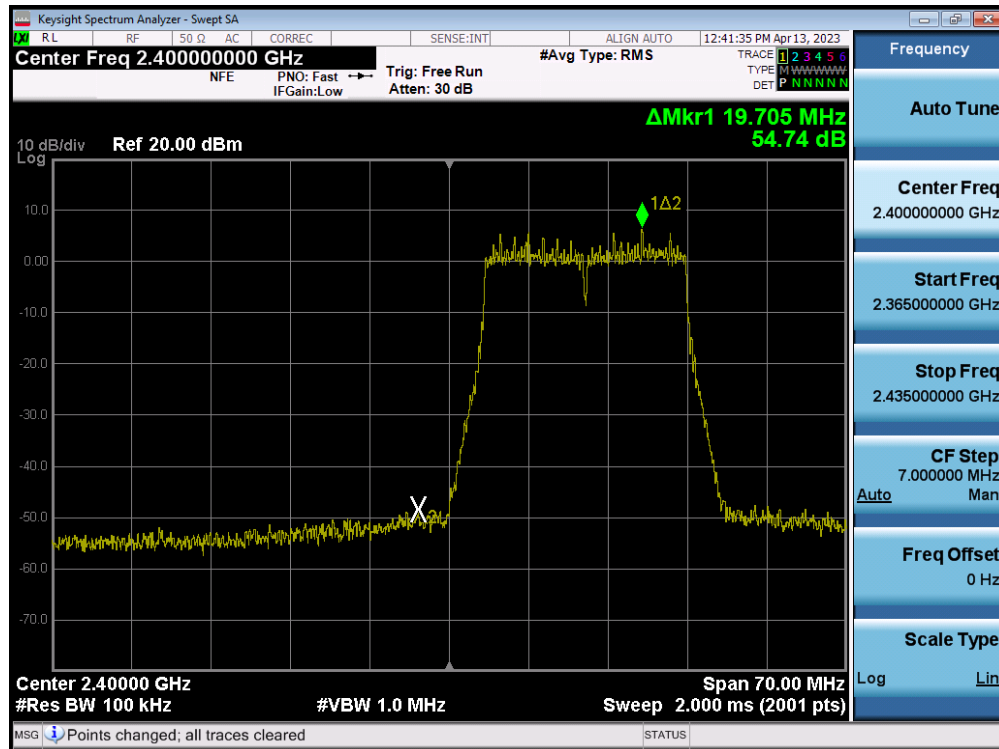


Plot 7-125. Band Edge Plot MIMO ANT2 (802.11n (2.4GHz) – Ch. 1)




Plot 7-126. Band Edge Plot MIMO ANT2 (802.11n (2.4GHz) – Ch. 10)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 92 of 135

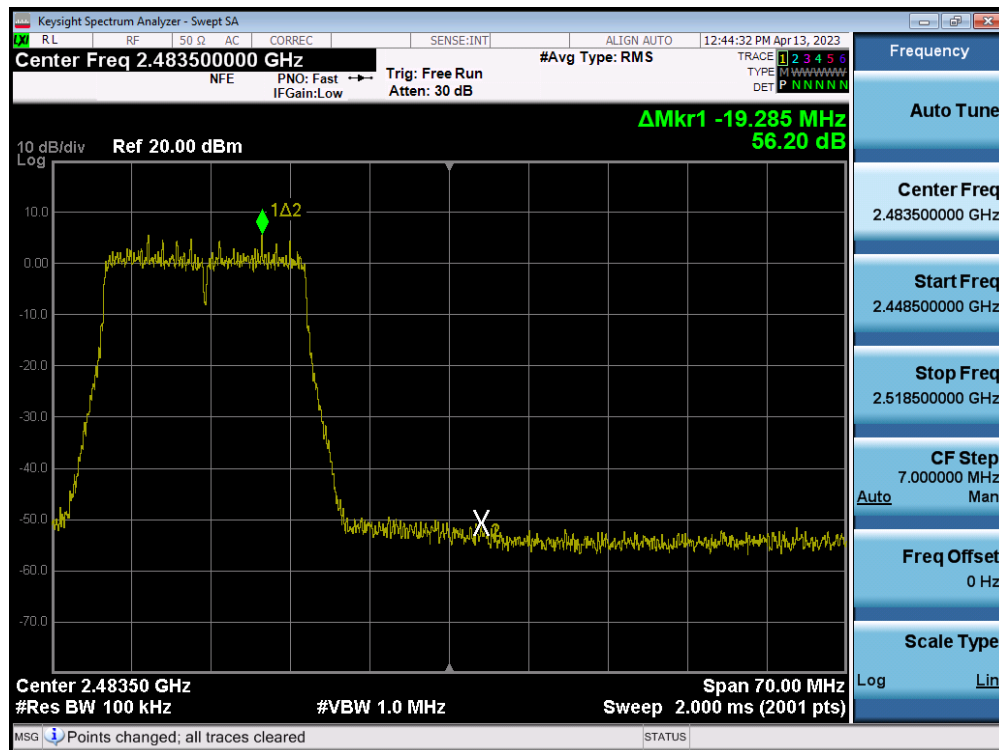


Plot 7-127. Band Edge Plot MIMO ANT2 (802.11n (2.4GHz) – Ch. 11)

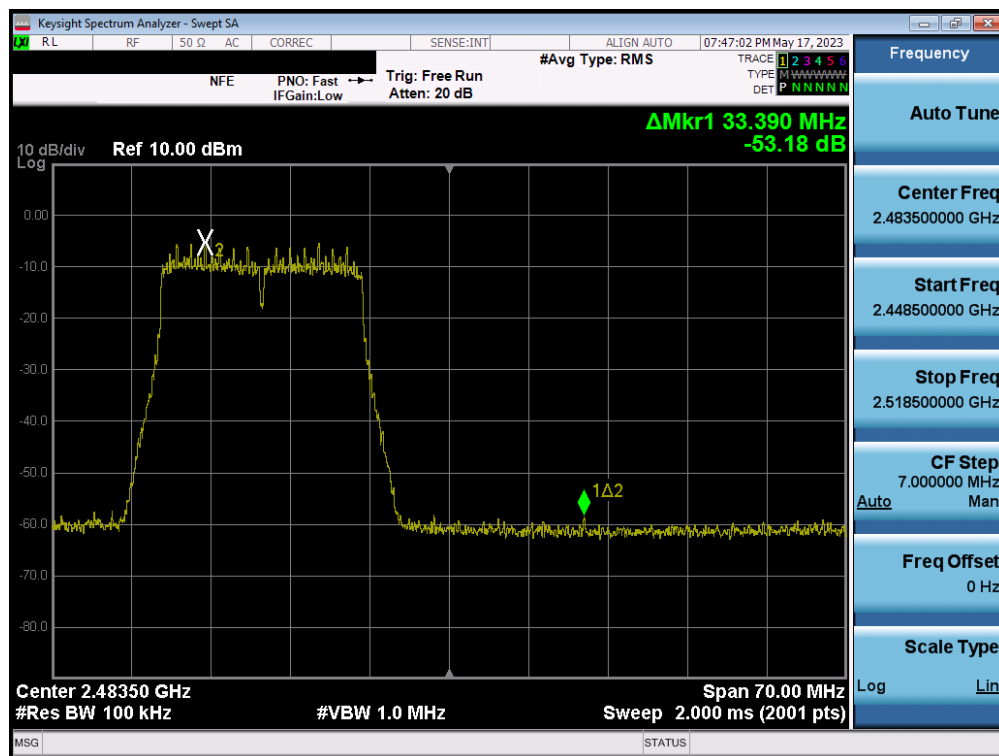


Plot 7-128. Band Edge Plot MIMO ANT2 (802.11n (2.4GHz) – Ch. 12)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04-A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 93 of 135

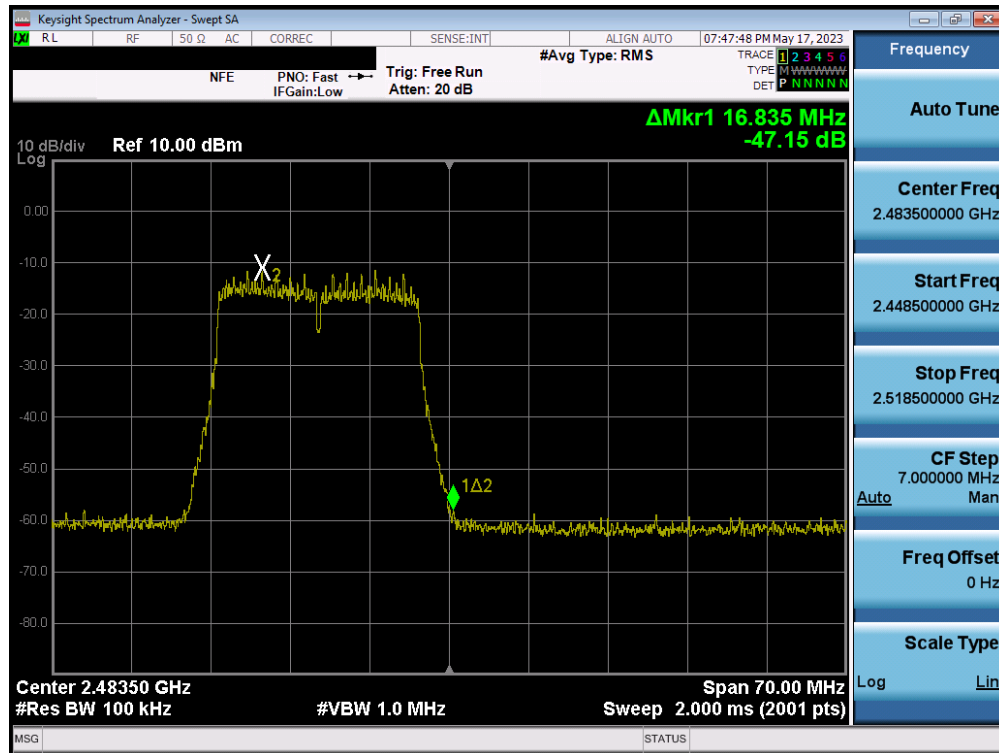

Plot 7-129. Band Edge Plot MIMO ANT2 (802.11n (2.4GHz) – Ch. 13)

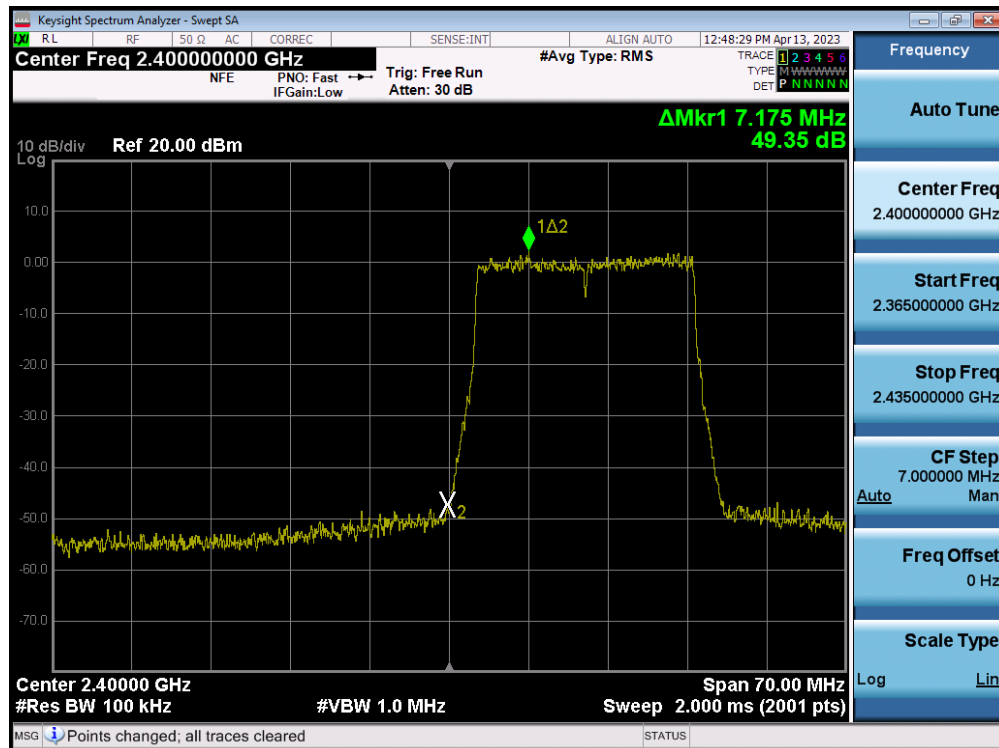


Plot 7-130. Band Edge Plot MIMO ANT2 (802.11ax (2.4GHz) – Ch. 1)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 94 of 135




Plot 7-131. Band Edge Plot MIMO ANT2 (802.11ax (2.4GHz) – Ch. 2)

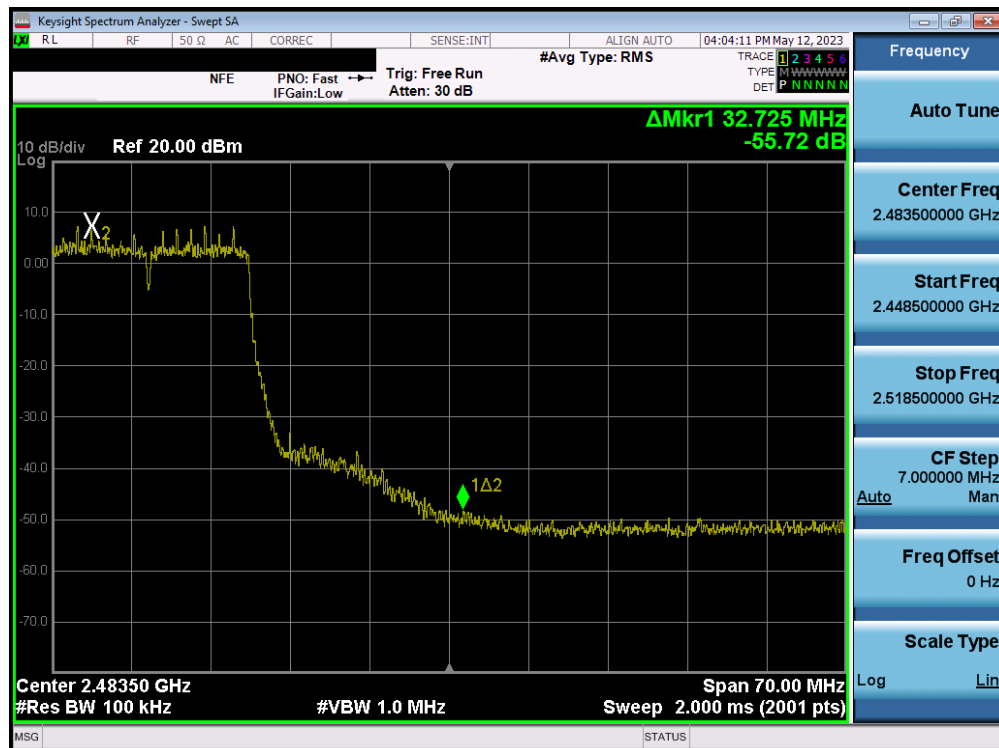


Plot 7-132. Band Edge Plot MIMO ANT2 (802.11ax (2.4GHz) – Ch. 10)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 95 of 135

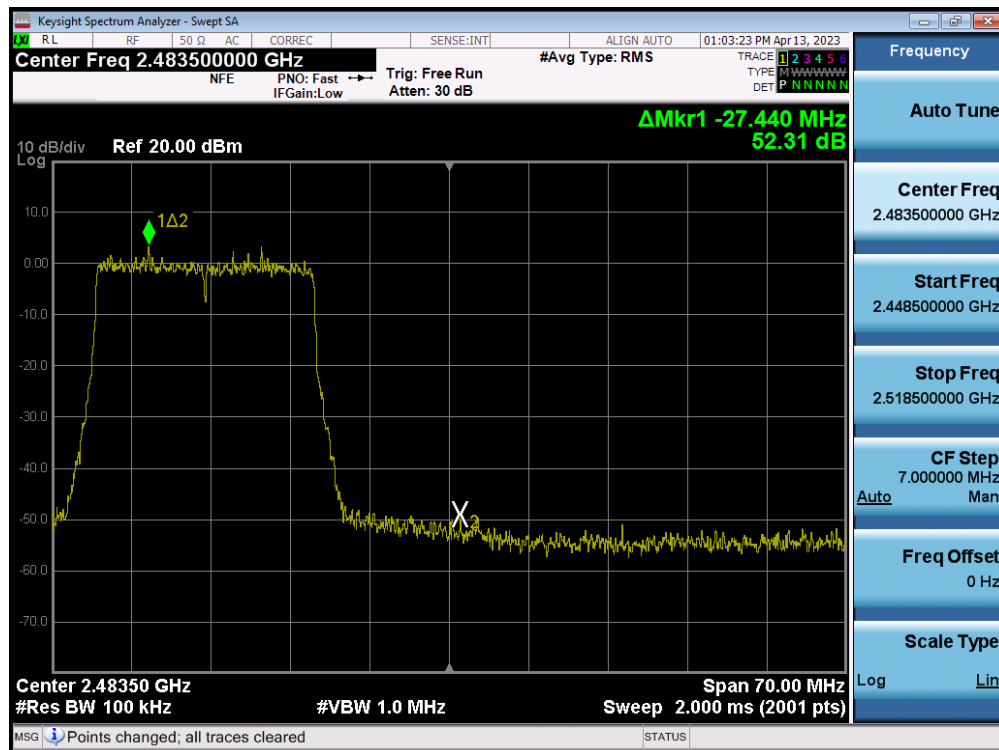


Plot 7-133. Band Edge Plot MIMO ANT2 (802.11ax (2.4GHz) – Ch. 11)

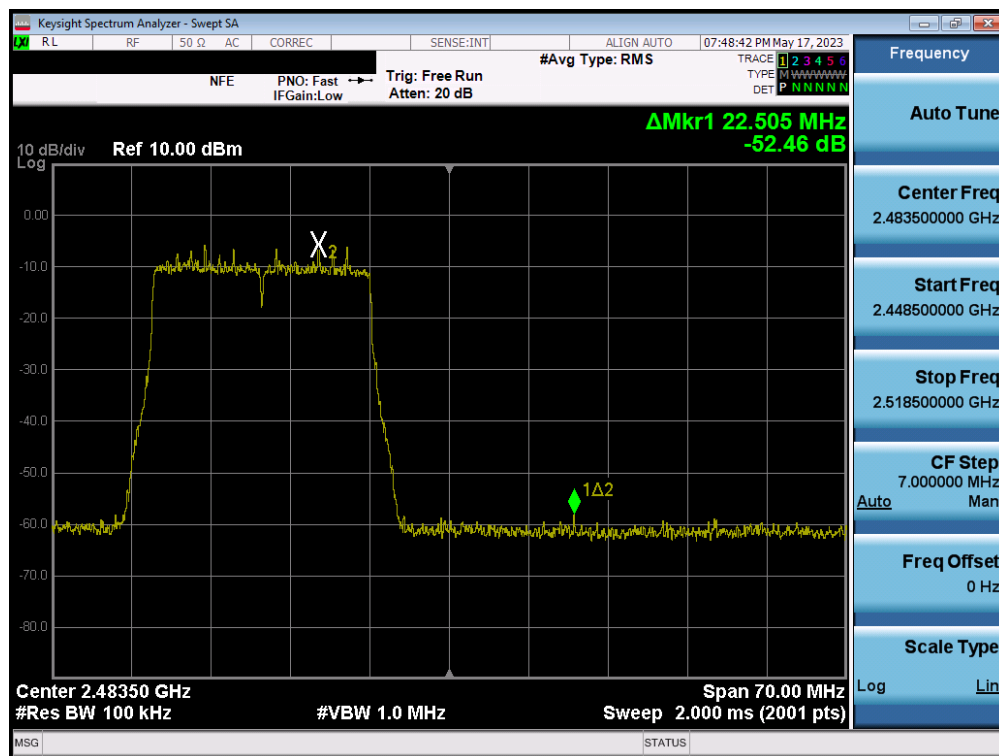

Plot 7-134. Band Edge Plot MIMO ANT2 (802.11ax (2.4GHz) – Ch. 12)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04-A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 96 of 135

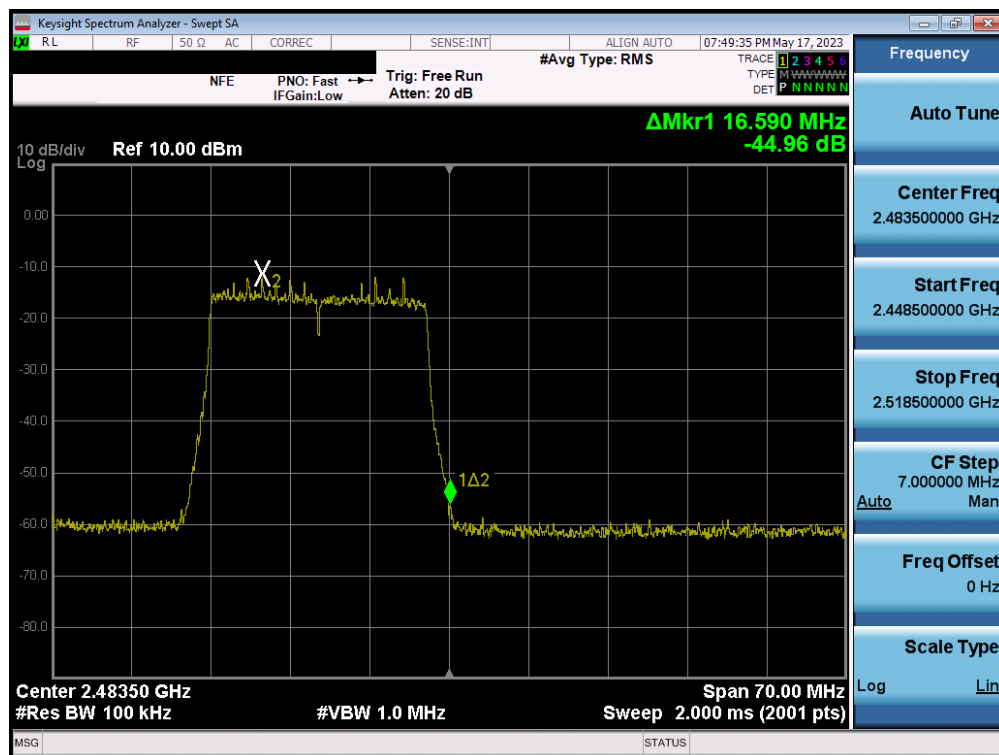

Plot 7-135. Band Edge Plot MIMO ANT2 (802.11ax (2.4GHz) – Ch. 13)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 97 of 135

7.6 Conducted Spurious Emissions

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. For the following out of band conducted spurious emissions plots, the EUT was investigated in all available data rates for “b”, “g”, “n”, “ax” modes. The worst-case spurious emissions for the 2.4GHz band were found while transmitting in “b” mode at 1 Mbps and are shown in the plots below.

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the procedure in Section 11.11.3 of ANSI C63.10-2013.

Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3

ANSI C63.10-2013 – Section 14.3.3

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-5. Test Instrument & Measurement Setup


FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 98 of 135

Test Notes


1. RBW was set to 1MHz rather than 100kHz in order to increase the measurement speed.
2. The display line shown in the following plots denotes the limit at 30dB below the fundamental emission level measured in a 100kHz bandwidth. However, since the traces in the following plots are measured with a 1MHz RBW, the display line may not necessarily appear to be 30dB below the level of the fundamental in a 1MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.
4. The conducted spurious emissions were measured to relative limits. Therefore, in accordance with ANSI C63.10-2013 Section 14.3.3, it was unnecessary to show compliance through the summation of test results of the individual outputs.

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 99 of 135

7.6.1 SISO Antenna-2 Conducted Spurious Emissions

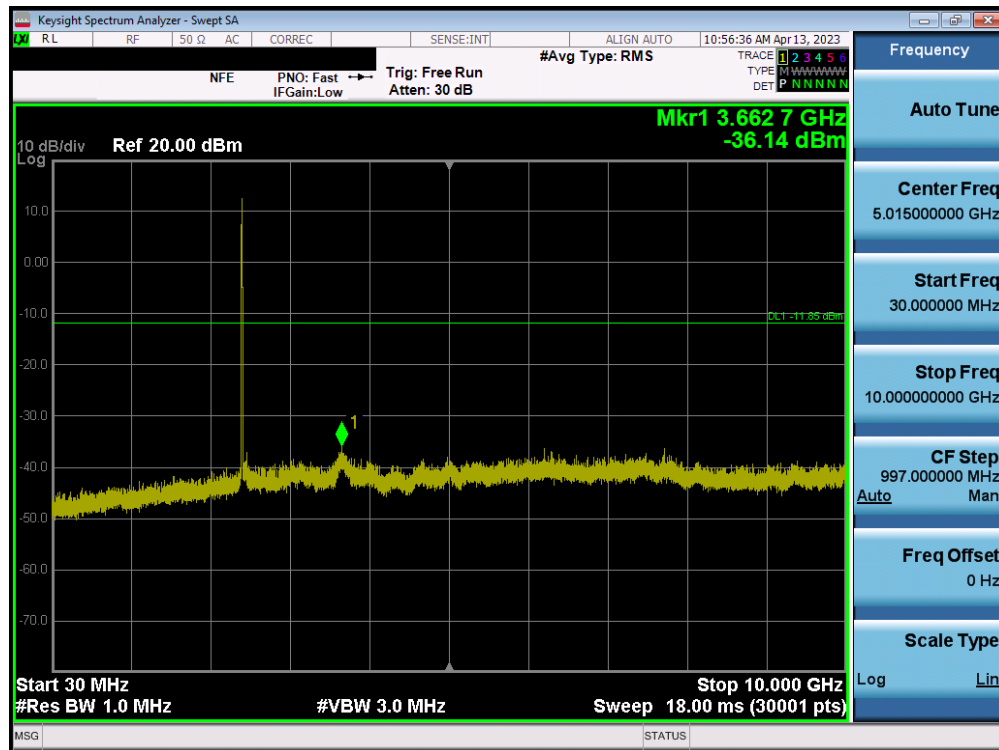



Plot 7-136. Conducted Spurious Plot SISO ANT2 (802.11b – Ch. 1)

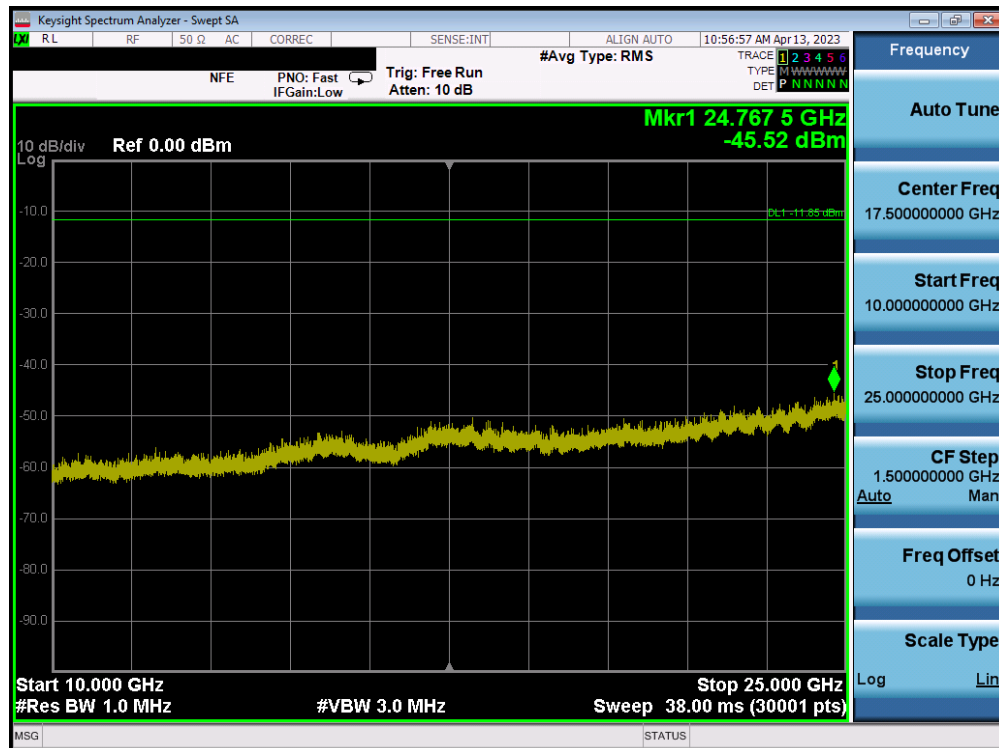


Plot 7-137. Conducted Spurious Plot SISO ANT2 (802.11b – Ch. 1)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 100 of 135

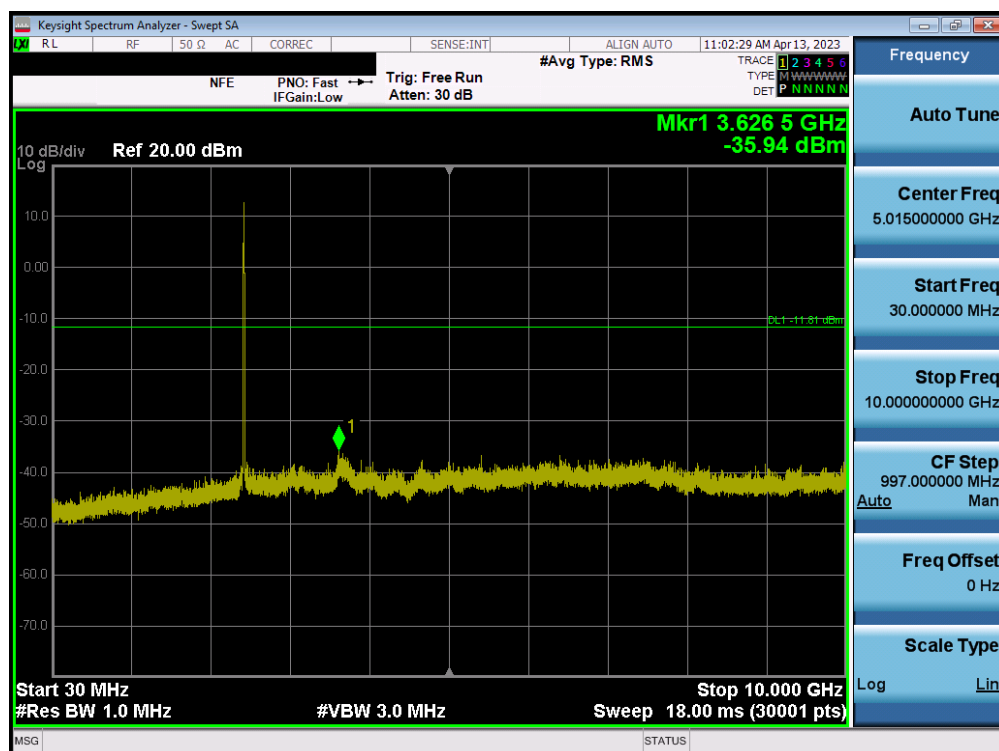

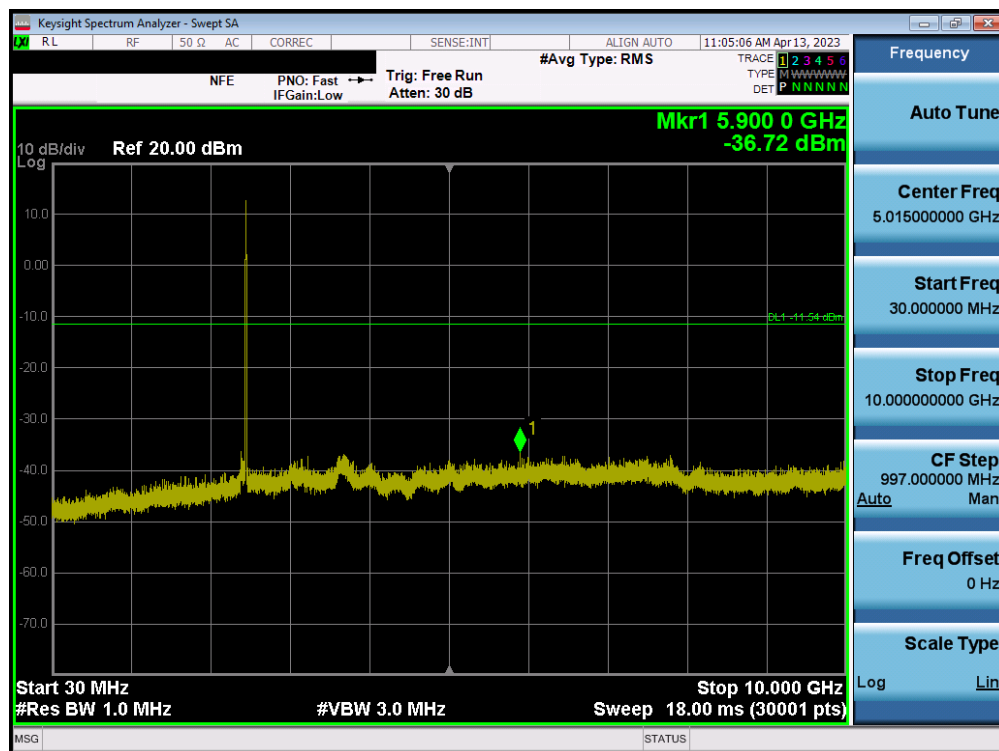


Plot 7-140. Conducted Spurious Plot SISO ANT2 (802.11b – Ch. 11)

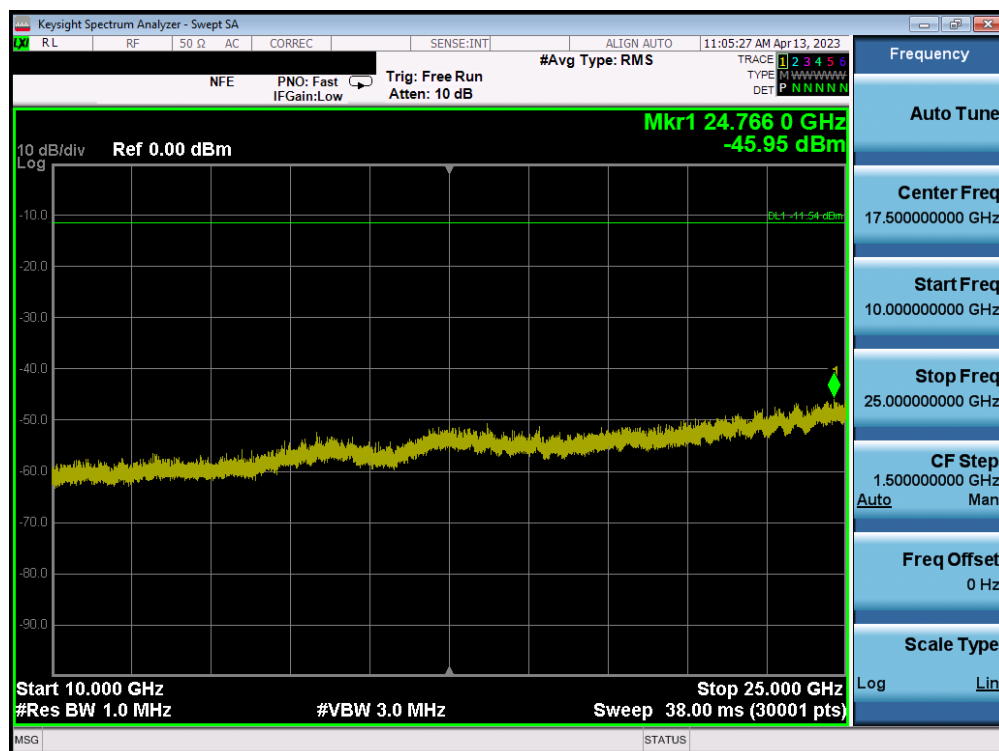


Plot 7-141. Conducted Spurious Plot SISO ANT2 (802.11b – Ch. 11)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 102 of 135

7.6.2 MIMO Antenna-1 Conducted Spurious Emissions

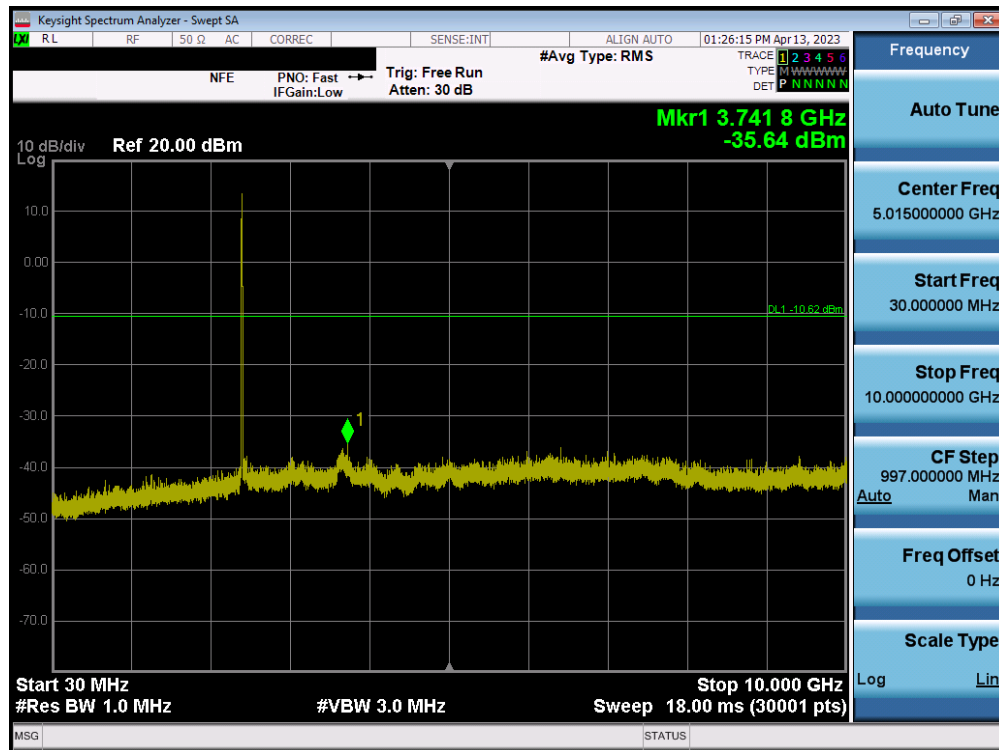


Plot 7-142. Conducted Spurious Plot MIMO ANT1 (802.11b – Ch. 1)

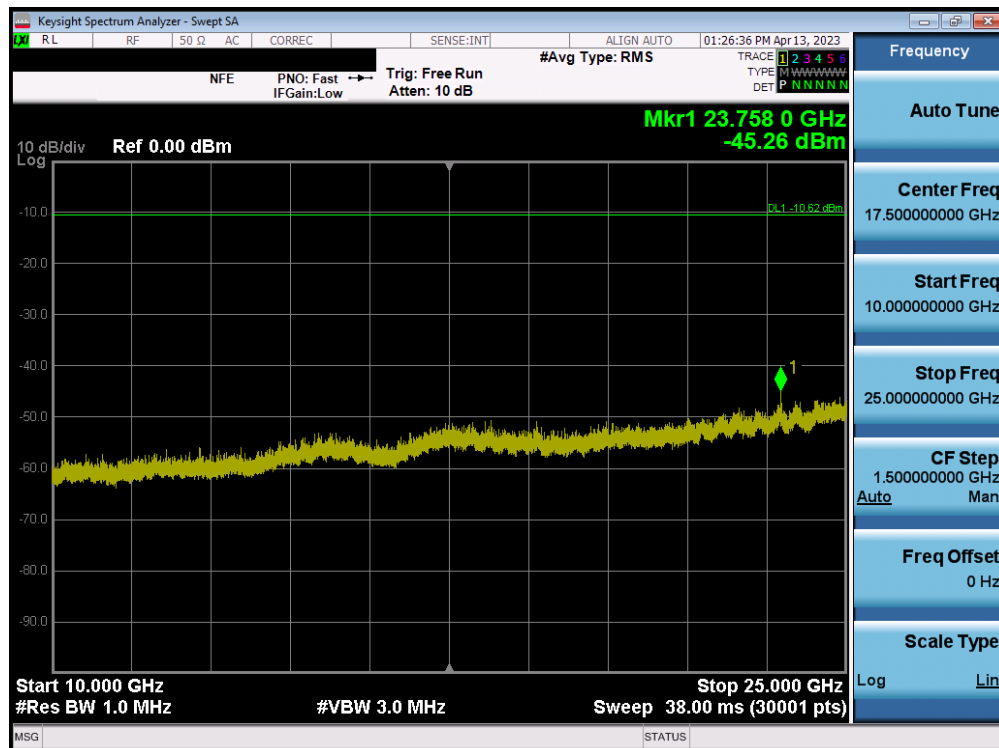


Plot 7-143. Conducted Spurious Plot MIMO ANT1 (802.11b – Ch. 1)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 103 of 135

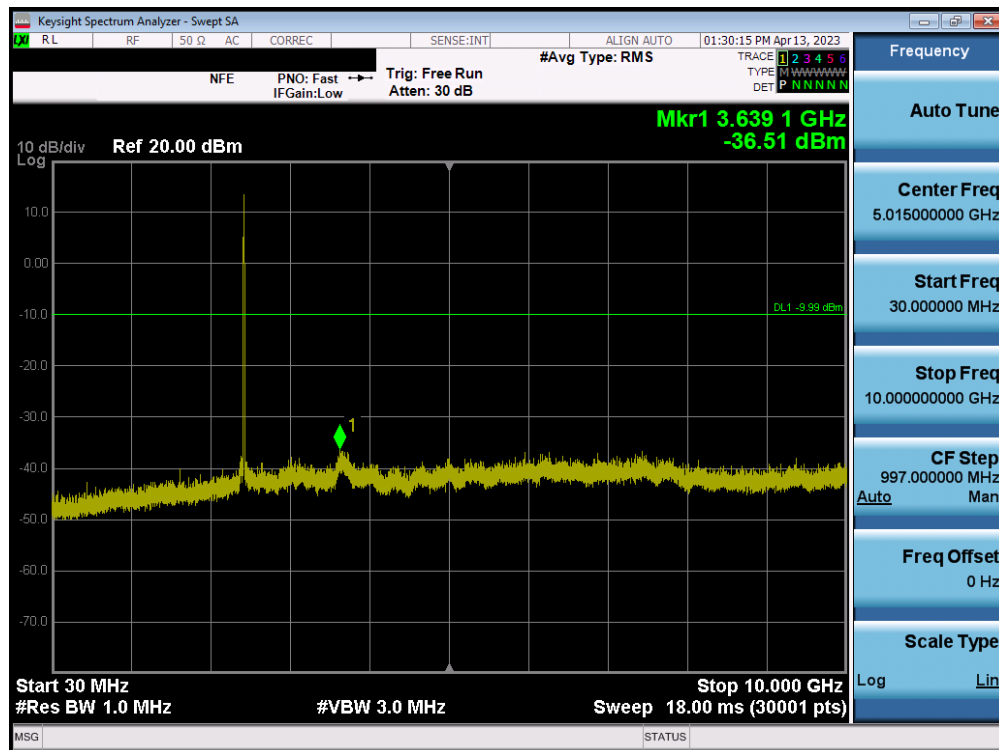


Plot 7-144. Conducted Spurious Plot MIMO ANT1 (802.11b – Ch. 6)

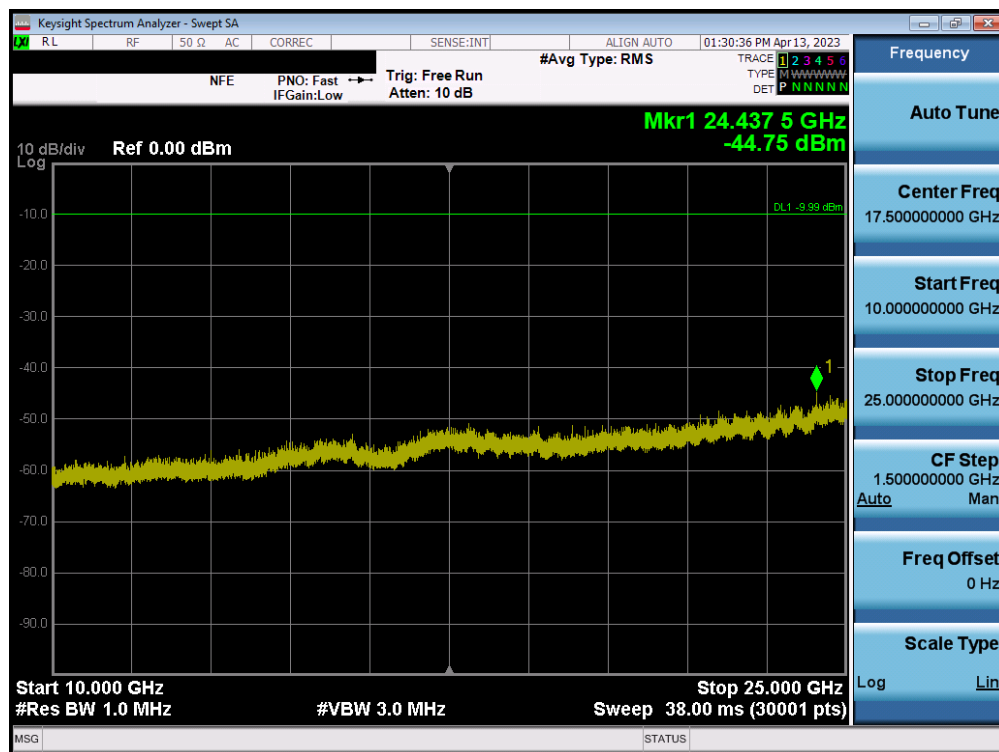


Plot 7-145. Conducted Spurious Plot MIMO ANT1 (802.11b – Ch. 6)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 104 of 135

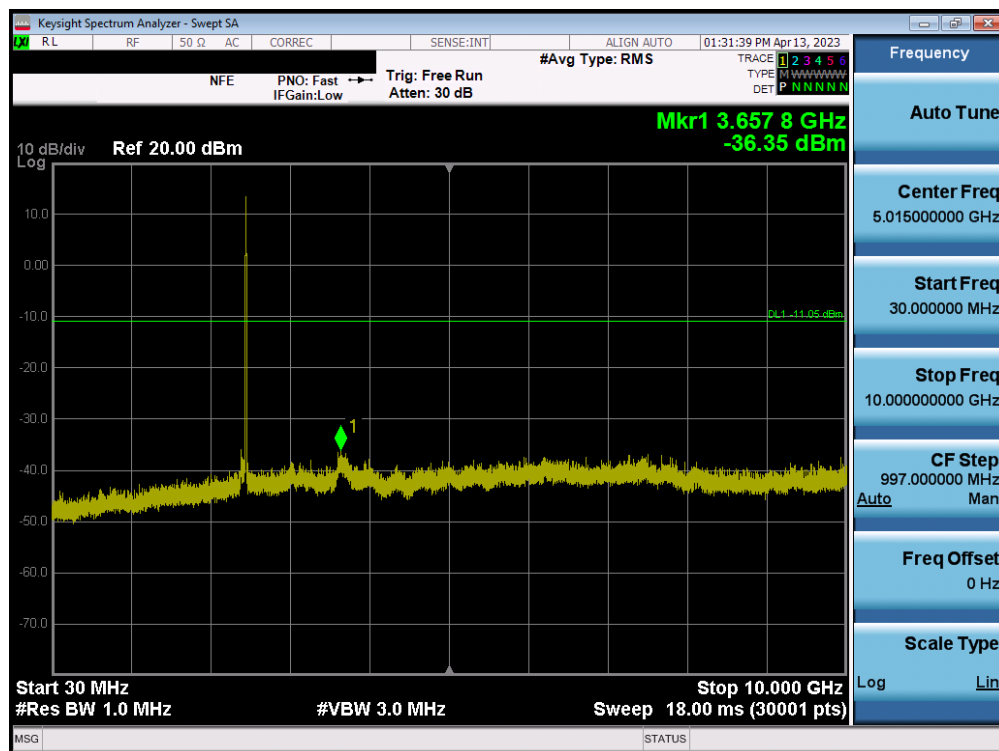


Plot 7-146. Conducted Spurious Plot MIMO ANT1 (802.11b – Ch. 11)

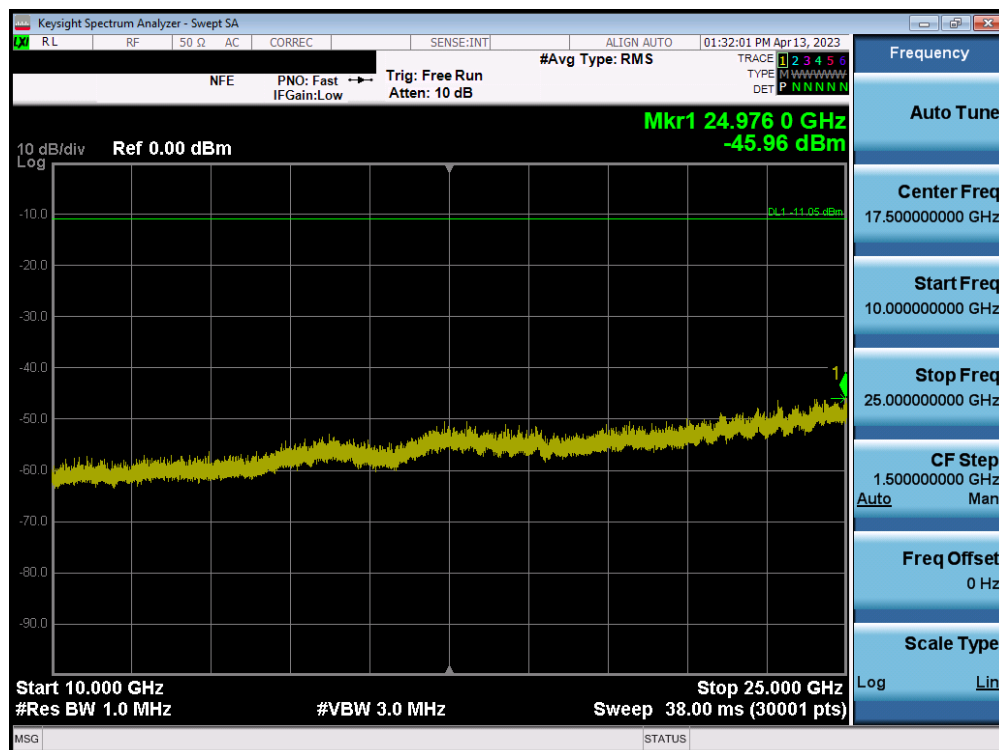


Plot 7-147. Conducted Spurious Plot MIMO ANT1 (802.11b – Ch. 11)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 105 of 135

7.6.3 MIMO Antenna-1 Conducted Spurious Emissions

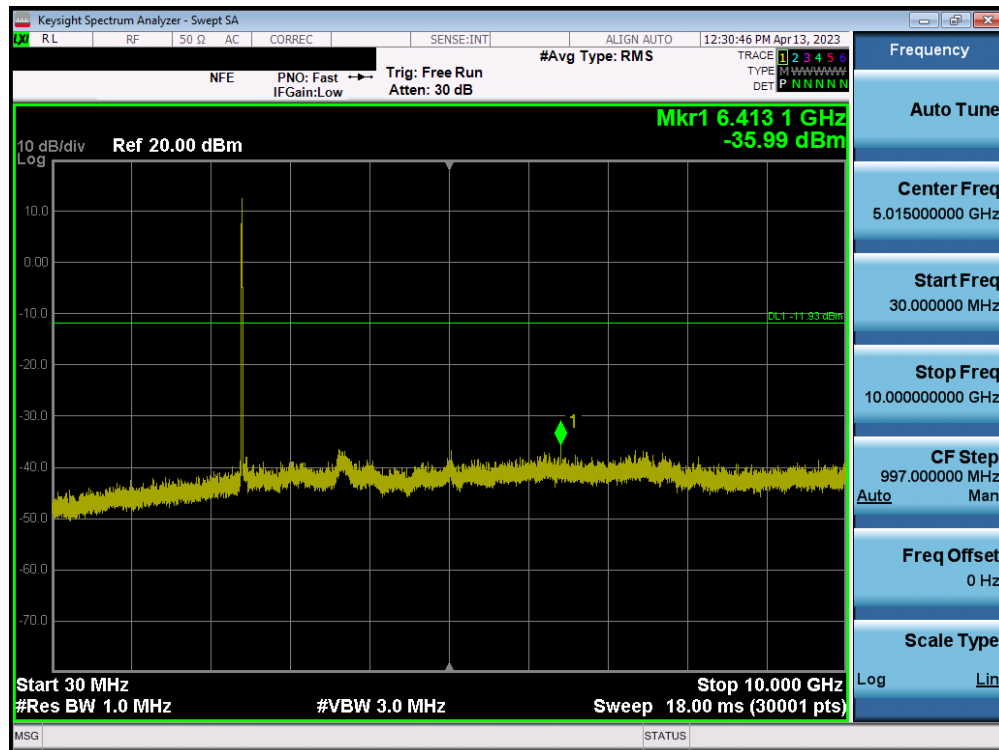


Plot 7-148. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 1)

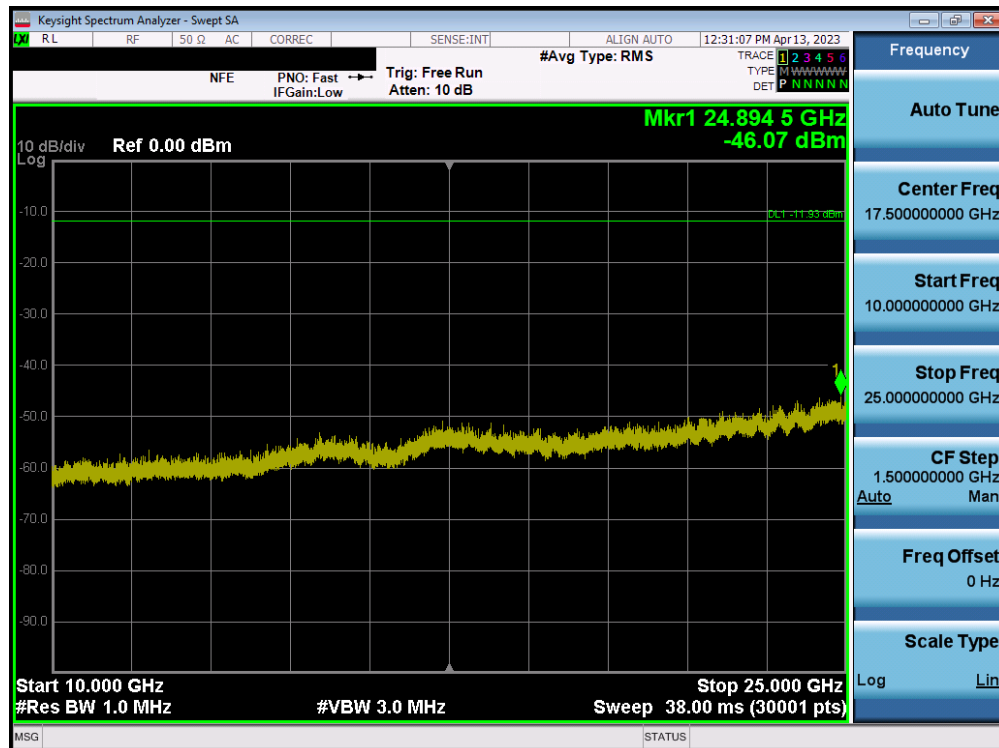


Plot 7-149. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 1)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 106 of 135

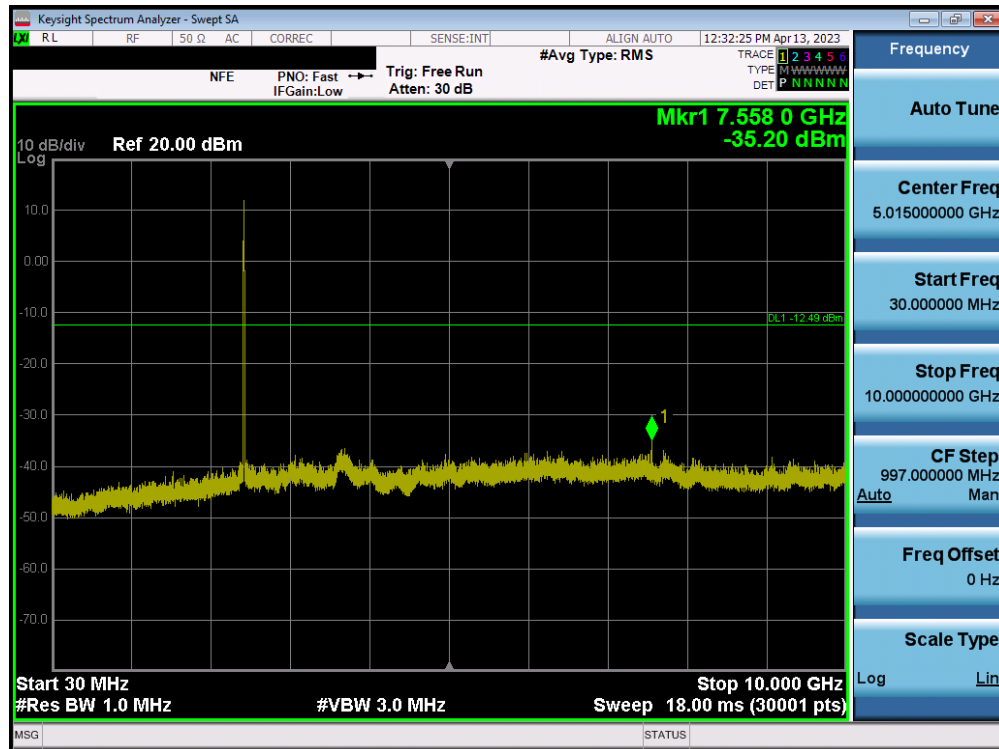


Plot 7-150. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 6)

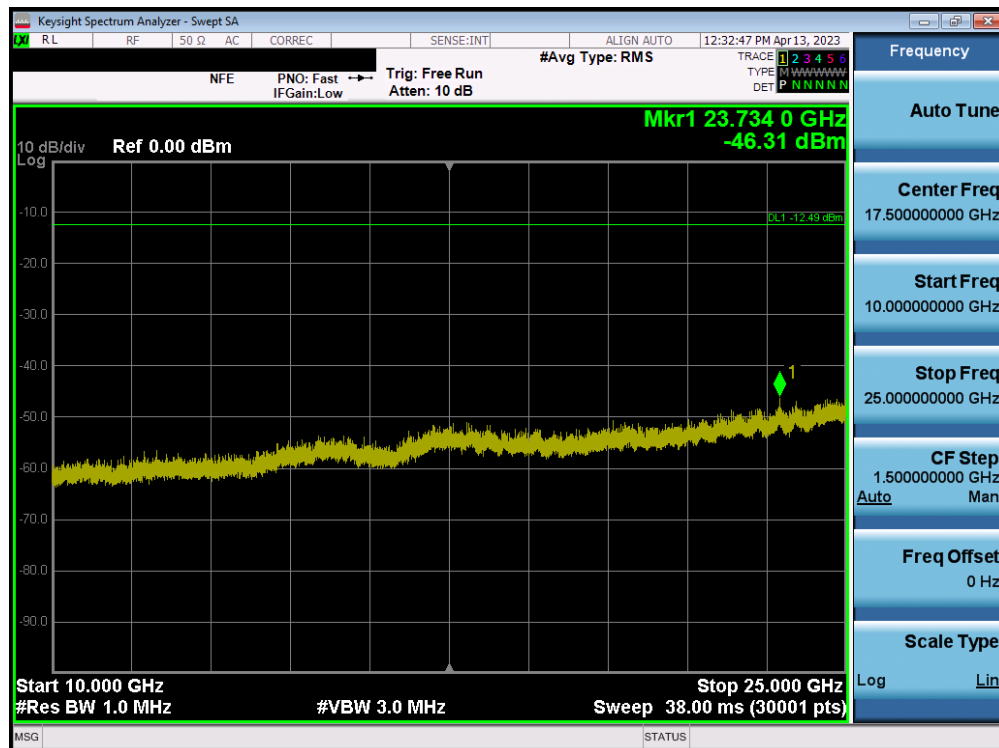


Plot 7-151. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 6)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 107 of 135

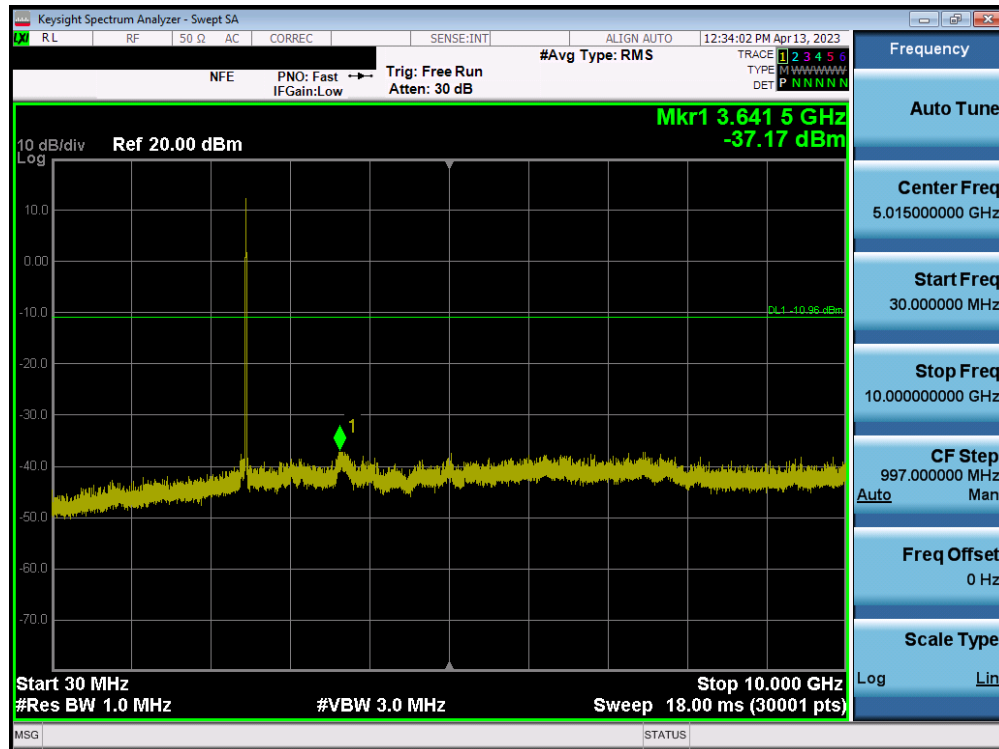

Plot 7-152. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 11)

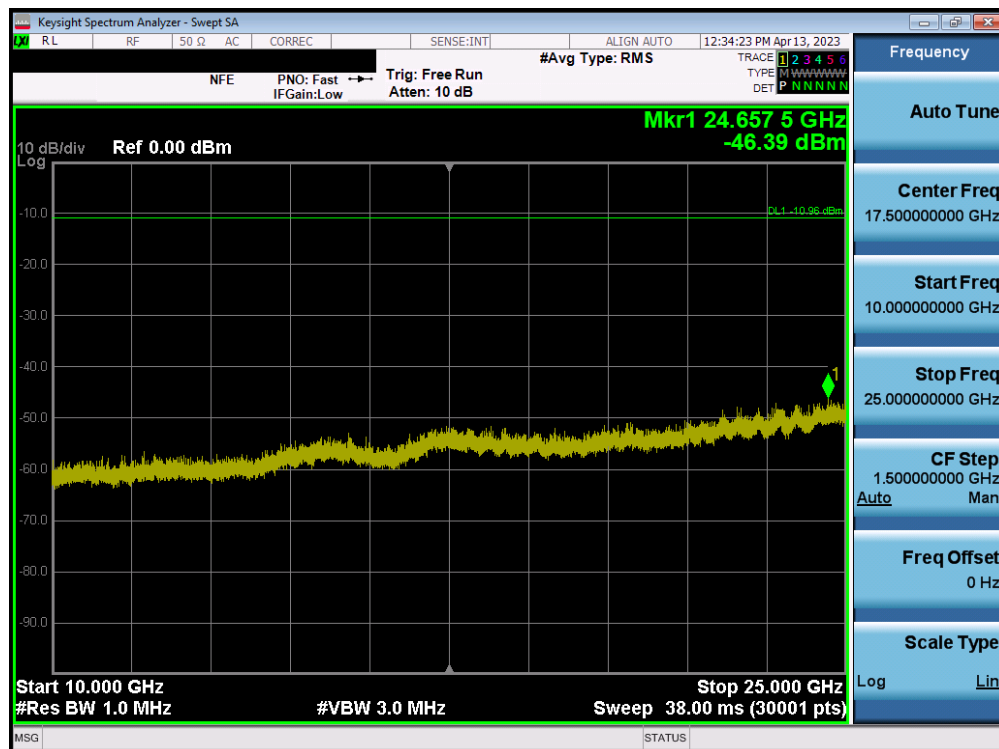

Plot 7-153. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 11)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 108 of 135

7.7 Radiated Emission Measurements

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst-case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in FCC §15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown FCC §15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-12. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Section 6.6.4.3

Test Settings – Above 1GHz

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span} \backslash \text{RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 109 of 135

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Settings – Below 1GHz

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

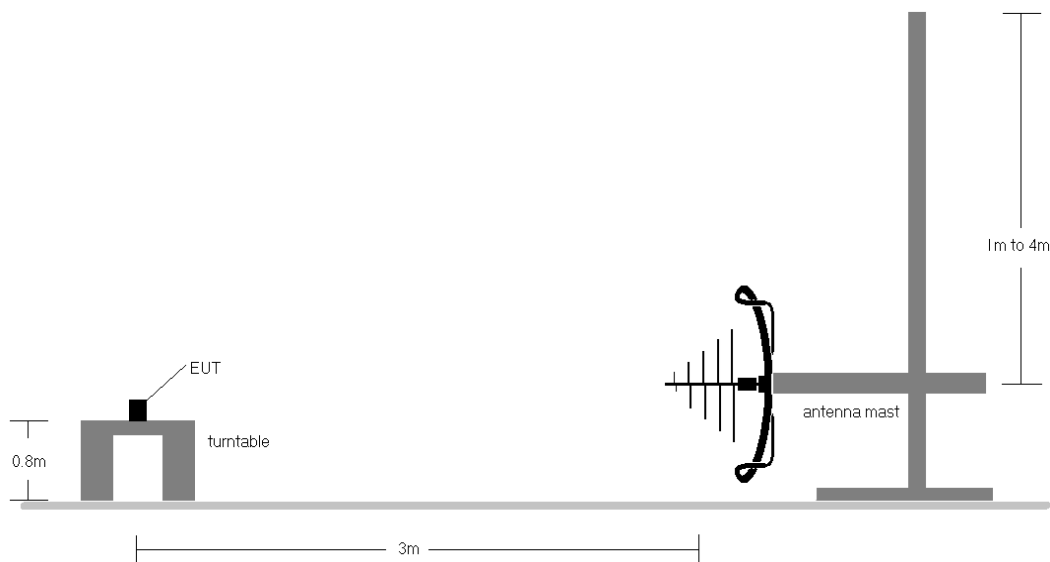


Figure 7-6. Radiated Test Setup < 1GHz

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 110 of 135

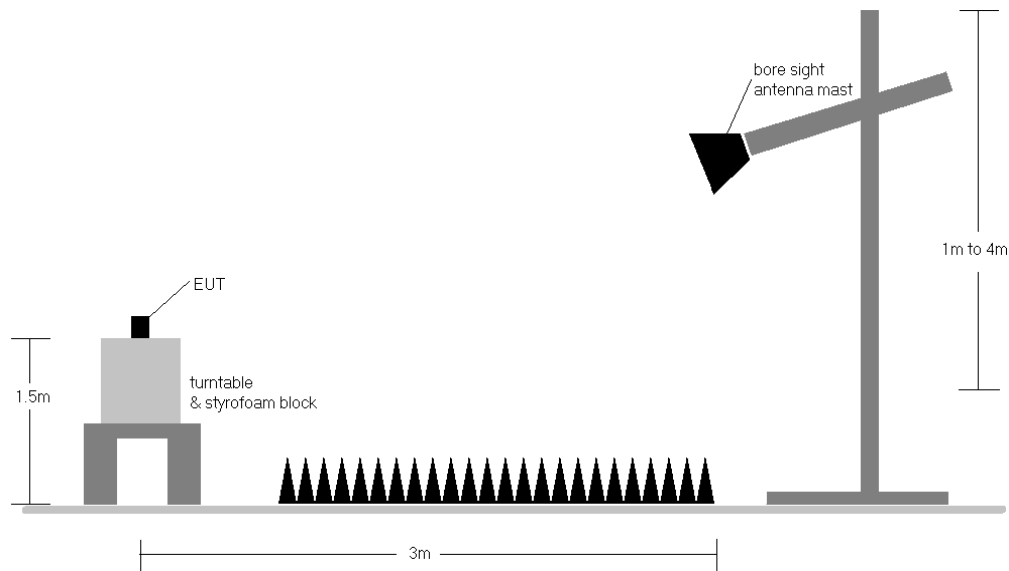


Figure 7-7. Radiated Test Setup > 1GHz

Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of ANSI C63.10-2013 Section 11.3 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limits shown in §15.209.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. Radiated spurious emissions were investigated while operating in MIMO mode, however, it was determined that single antenna operation produced the worst-case emissions. Since the emissions produced from MIMO operation were found to be more than 20dB below the limit, the MIMO emissions are not reported.

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 111 of 135

8. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
9. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level}_{[dBm]} + 107 + \text{AFCL}_{[dB\mu V/m]}$
- $\text{AFCL}_{[dB\mu V/m]} = \text{Antenna Factor}_{[dB\mu V/m]} + \text{Cable Loss}_{[dB]}$
- $\text{Margin}_{[dB]} = \text{Field Strength Level}_{[dB\mu V/m]} - \text{Limit}_{[dB\mu V/m]}$

Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots in Section 7.7 was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 112 of 135


7.7.1 SISO Antenna-2 Radiated Spurious Emission Measurements

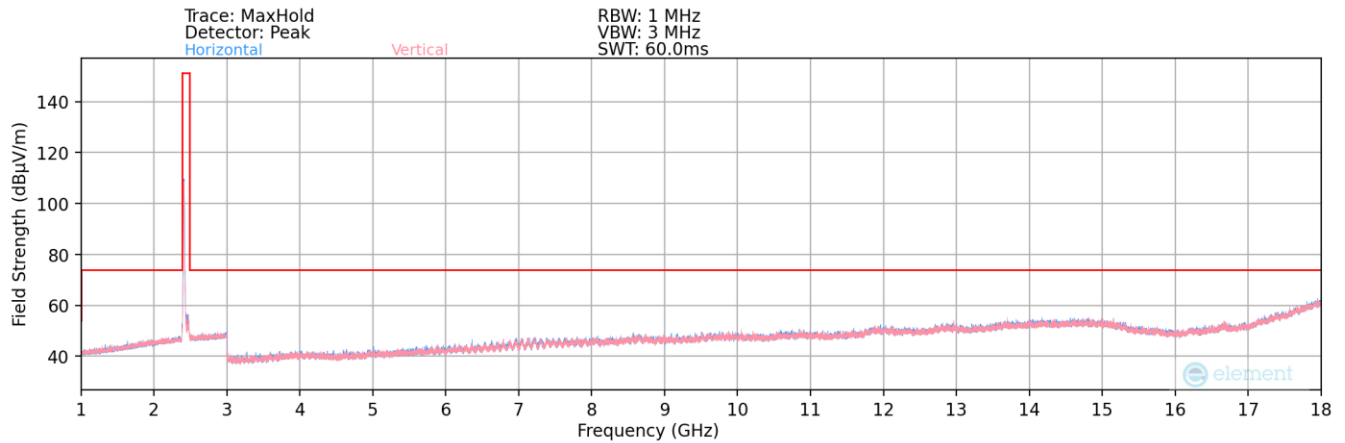

Plot 7-154. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11b – Ch. 1)

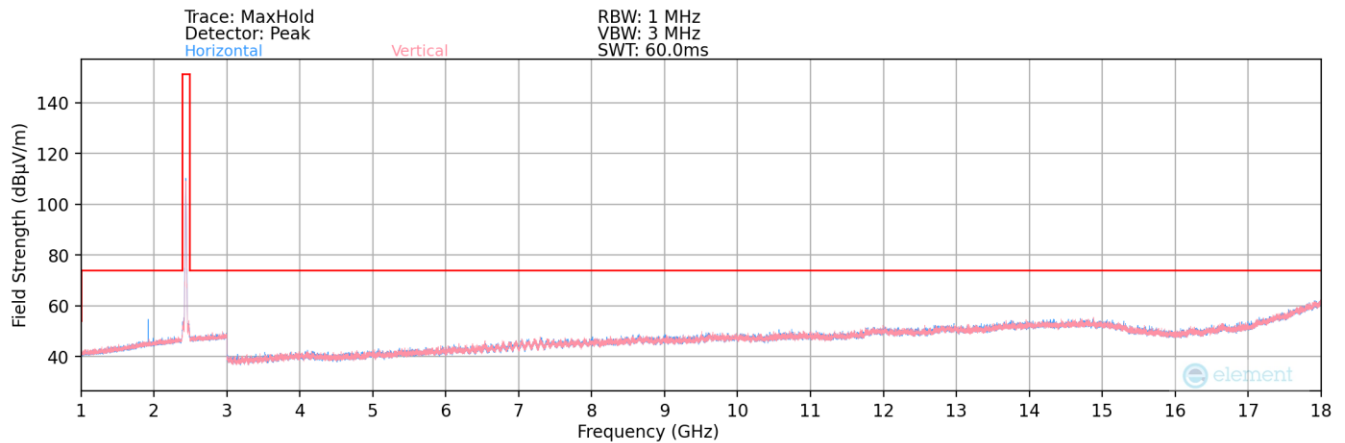


Plot 7-155. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11b – Ch. 6)

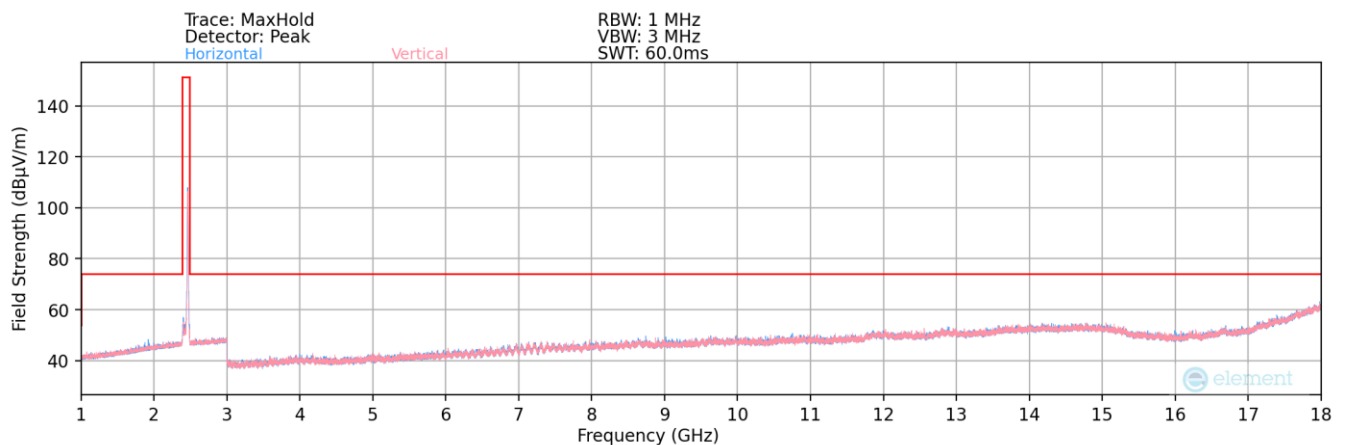

Plot 7-156. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11b – Ch. 11)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04-A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 113 of 135

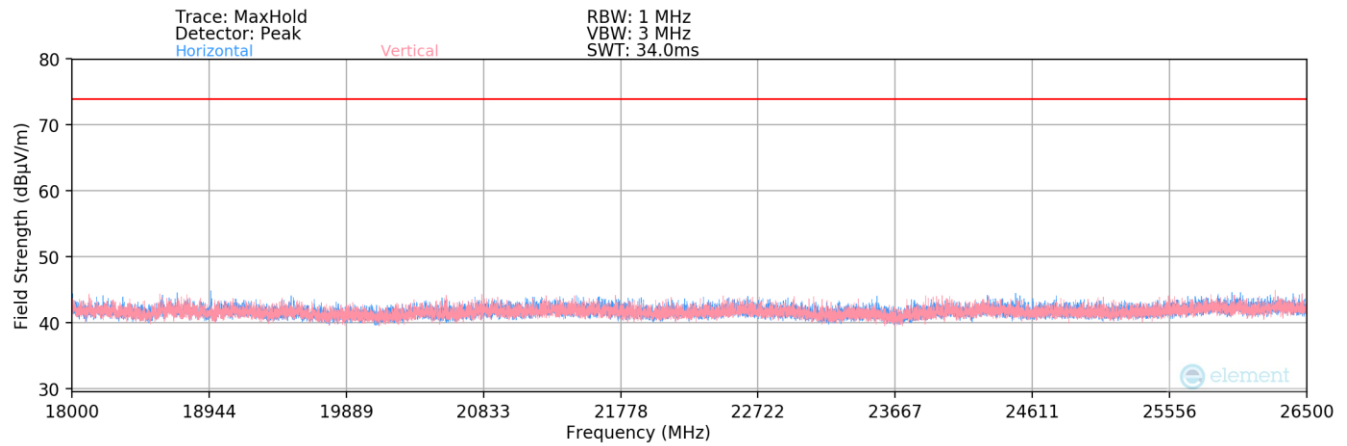

Plot 7-157. Radiated Spurious Plot above 18GHz SISO ANT2

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 114 of 135

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	H	-	-	-68.65	-0.36	37.99	53.98	-15.99
4824.00	Peak	H	-	-	-62.74	-0.36	43.90	73.98	-30.08
12060.00	Avg	H	-	-	-68.32	12.93	51.61	53.98	-2.37
12060.00	Peak	H	-	-	-63.50	12.93	56.43	73.98	-17.55

Table 7-13. Radiated Measurements SISO ANT2

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 6

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	H	-	-	-68.53	-0.06	38.41	53.98	-15.57
4874.00	Peak	H	-	-	-62.13	-0.06	44.81	73.98	-29.17
7311.00	Avg	H	-	-	-70.26	6.56	43.30	53.98	-10.68
7311.00	Peak	H	-	-	-64.46	6.56	49.10	73.98	-24.88
12185.00	Avg	H	-	-	-69.16	12.59	50.43	53.98	-3.55
12185.00	Peak	H	-	-	-63.41	12.59	56.18	73.98	-17.80

Table 7-14. Radiated Measurements SISO ANT2

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 115 of 135


Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	-	-	-68.44	0.89	39.45	53.98	-14.53
4924.00	Peak	H	-	-	-62.49	0.89	45.40	73.98	-28.58
7386.00	Avg	H	-	-	-70.18	7.03	43.85	53.98	-10.13
7386.00	Peak	H	-	-	-63.99	7.03	50.04	73.98	-23.94
12310.00	Avg	H	-	-	-69.61	12.71	50.10	53.98	-3.88
12310.00	Peak	H	-	-	-64.28	12.71	55.43	73.98	-18.55


Table 7-15. Radiated Measurements SISO ANT2

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 116 of 135


7.7.2 MIMO Radiated Spurious Emission Measurements

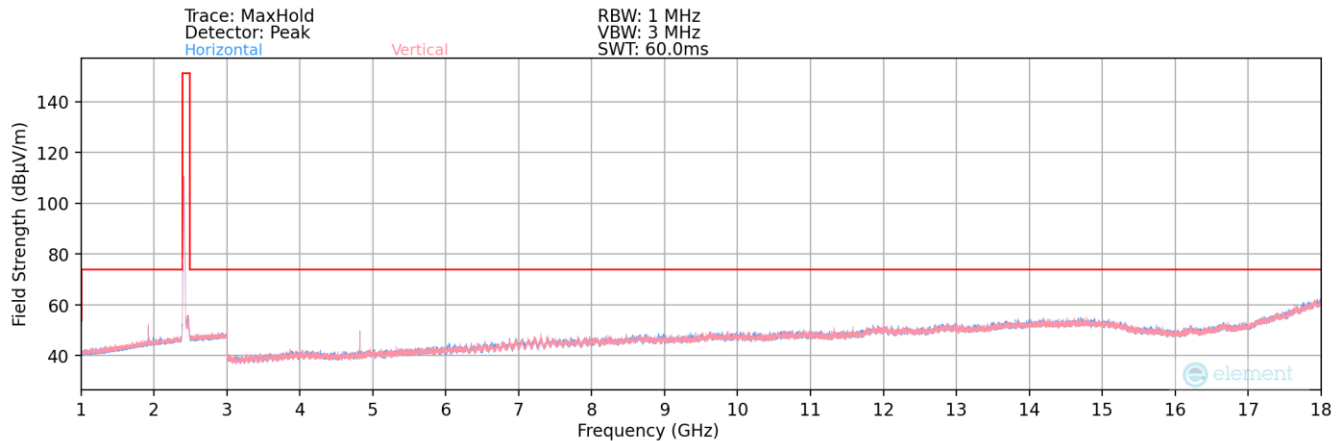

Plot 7-158. Radiated Spurious Plot above 1GHz MIMO (802.11b – Ch. 1)

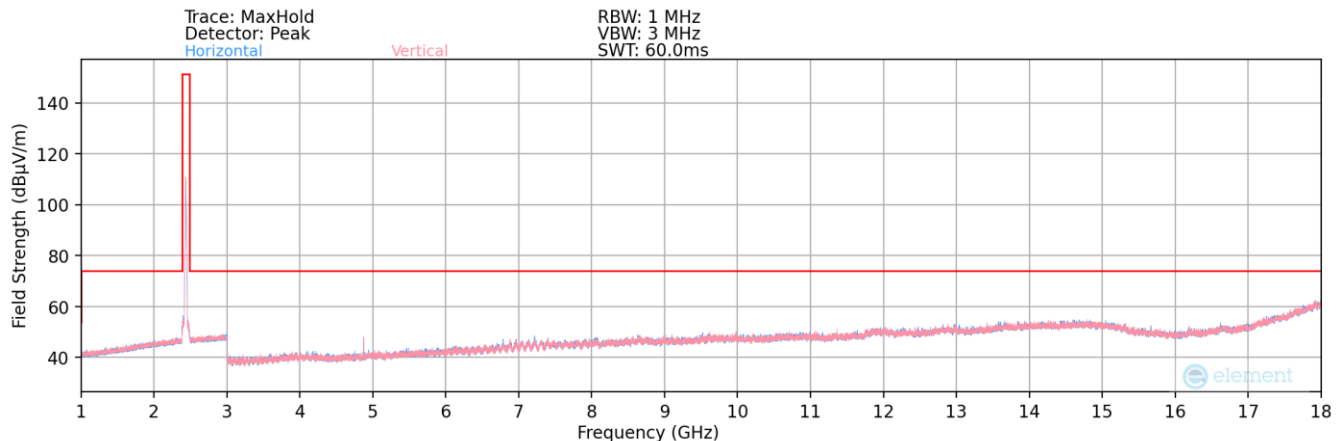


Plot 7-159. Radiated Spurious Plot above 1GHz MIMO (802.11b – Ch. 6)

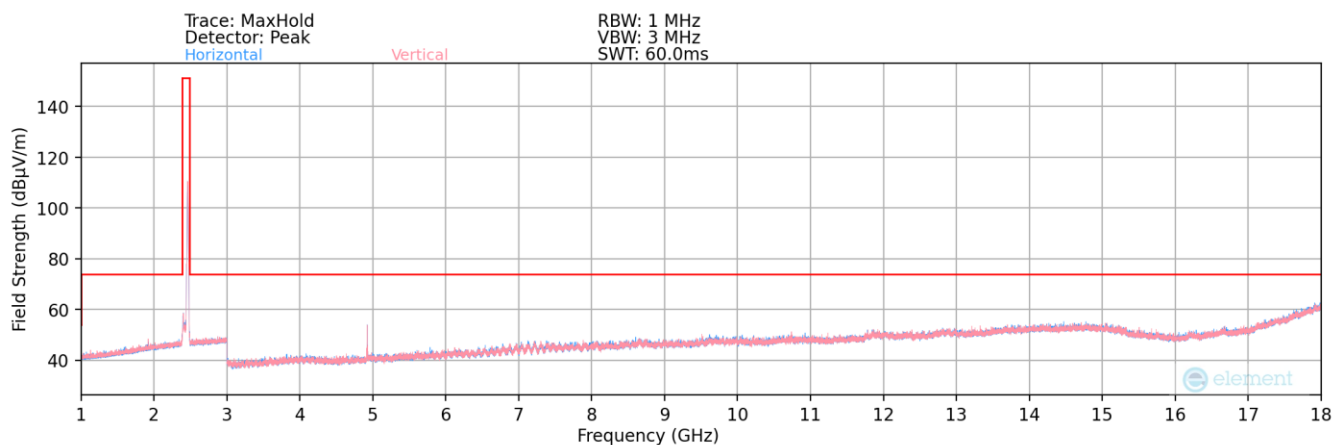

Plot 7-160. Radiated Spurious Plot above 1GHz MIMO (802.11b – Ch. 11)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04-A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 117 of 135

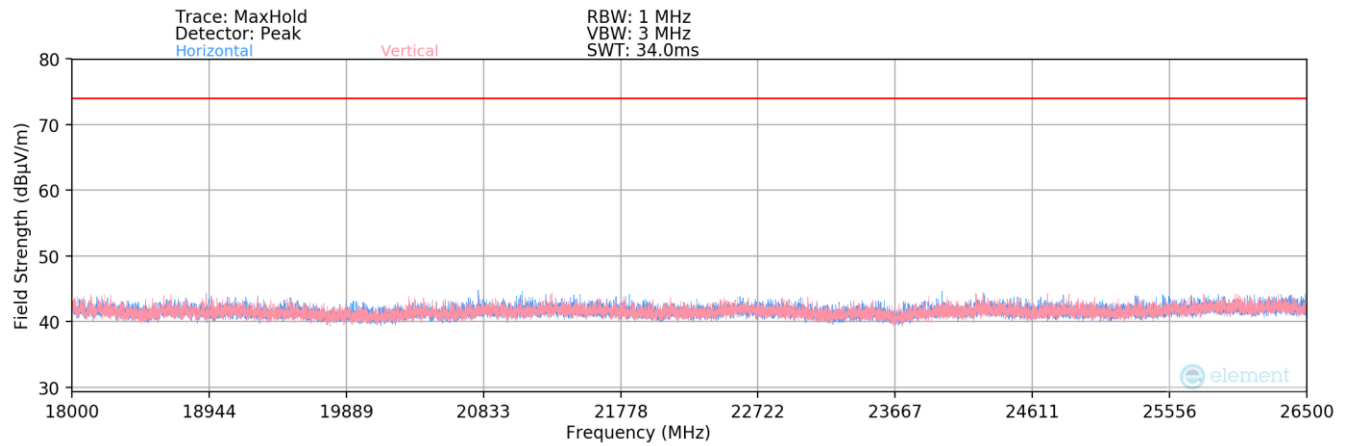

Plot 7-161. Radiated Spurious Plot above 18GHz MIMO

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 118 of 135

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	H	128	283	-59.78	-0.36	46.86	53.98	-7.12
4824.00	Peak	H	128	283	-58.82	-0.36	47.82	73.98	-26.16
12060.00	Avg	H	-	-	-69.23	12.93	50.70	53.98	-3.28
12060.00	Peak	H	-	-	-63.49	12.93	56.44	73.98	-17.54

Table 7-16. Radiated Measurements MIMO

Worst Case Mode: 802.11b
Worst Case Transfer Rate: 1 Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2437MHz
Channel: 6

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	H	116	246	-61.02	-0.06	45.92	53.98	-8.06
4874.00	Peak	H	116	246	-58.64	-0.06	48.30	73.98	-25.68
7311.00	Avg	H	-	-	-70.10	6.56	43.46	53.98	-10.52
7311.00	Peak	H	-	-	-64.06	6.56	49.50	73.98	-24.48
12185.00	Avg	H	-	-	-69.66	12.59	49.93	53.98	-4.05
12185.00	Peak	H	-	-	-64.55	12.59	55.04	73.98	-18.94

Table 7-17. Radiated Measurements MIMO

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 119 of 135

Worst Case Mode: 802.11b
 Worst Case Transfer Rate: 1 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	131	285	-57.25	0.89	50.64	53.98	-3.34
4924.00	Peak	H	131	285	-55.10	0.89	52.79	73.98	-21.19
7386.00	Avg	H	-	-	-70.10	7.03	43.93	53.98	-10.05
7386.00	Peak	H	-	-	-64.90	7.03	49.13	73.98	-24.85
12310.00	Avg	H	-	-	-69.57	12.71	50.14	53.98	-3.84
12310.00	Peak	H	-	-	-64.93	12.71	54.78	73.98	-19.20


Table 7-18. Radiated Measurements MIMO

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 120 of 135


7.7.3 SISO Antenna-2 Radiated Restricted Band Edge Measurements

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

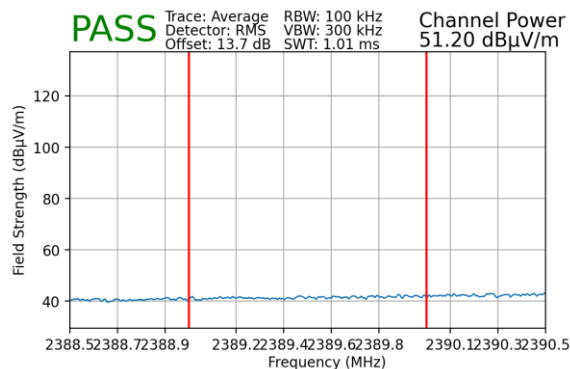


Plot 7-162. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Average)

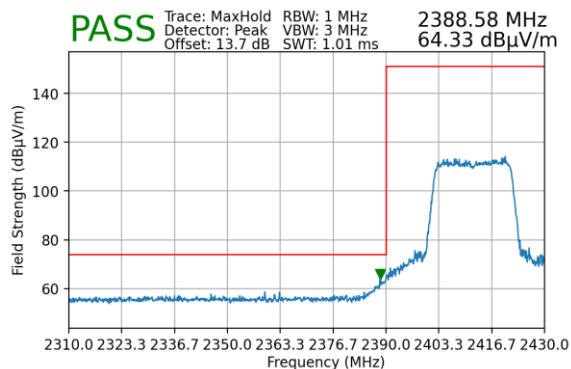


Plot 7-163. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Peak)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2417MHz
Channel:	2

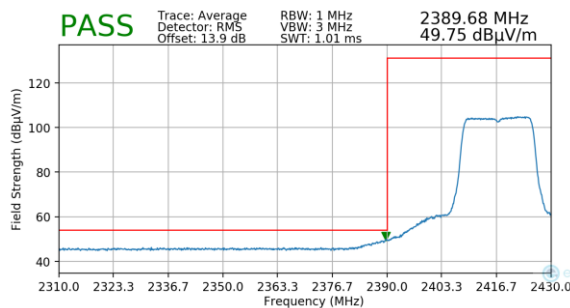


Plot 7-164. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Average)

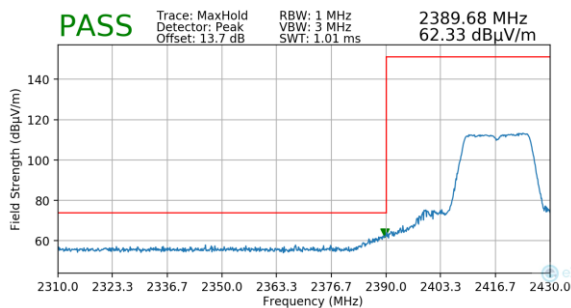


Plot 7-165. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Peak)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 121 of 135

Worst Case Mode: 802.11ax
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 2457MHz
Channel: 10

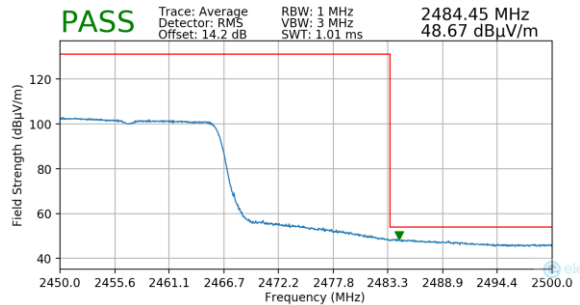


Plot 7-166. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average)

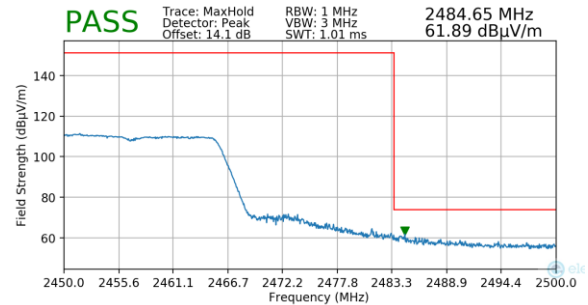


Plot 7-167. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak)

Worst Case Mode: 802.11ax
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

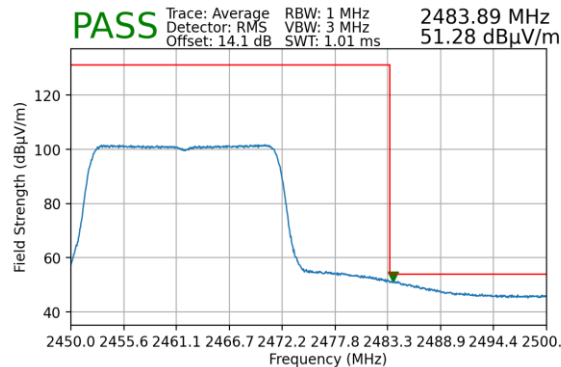


Plot 7-168. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average)

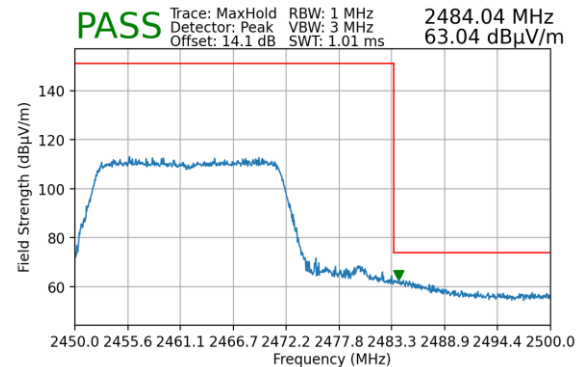


Plot 7-169. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04-A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 122 of 135

Worst Case Mode: 802.11g
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2467MHz
Channel: 12

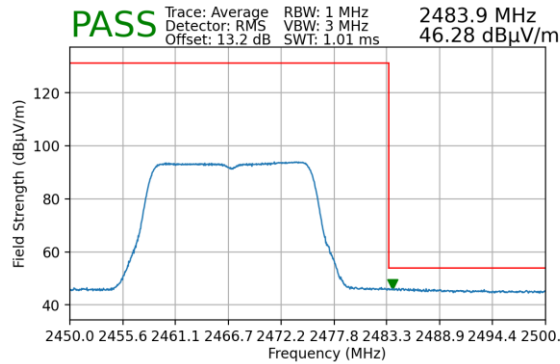


Plot 7-170. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average)

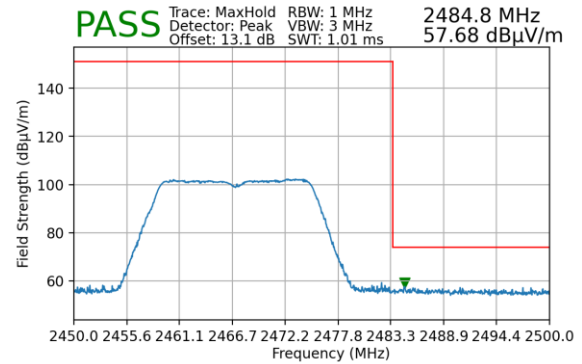


Plot 7-171. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak)

Worst Case Mode: 802.11ax
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 2472MHz
Channel: 13

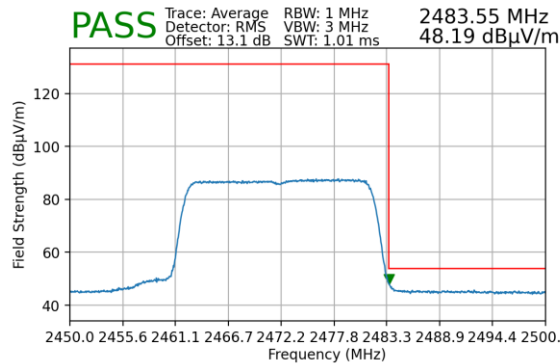

Plot 7-172. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average)

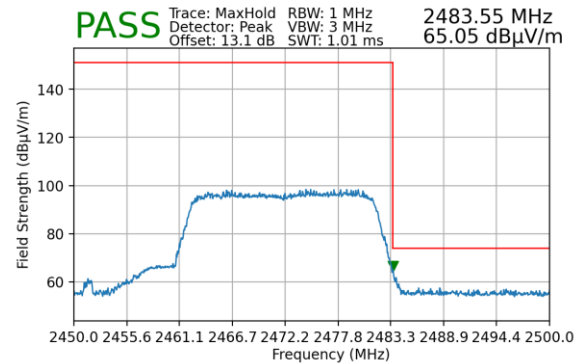


Plot 7-173. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 123 of 135


7.7.4 MIMO Radiated Restricted Band Edge Measurements

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS8
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

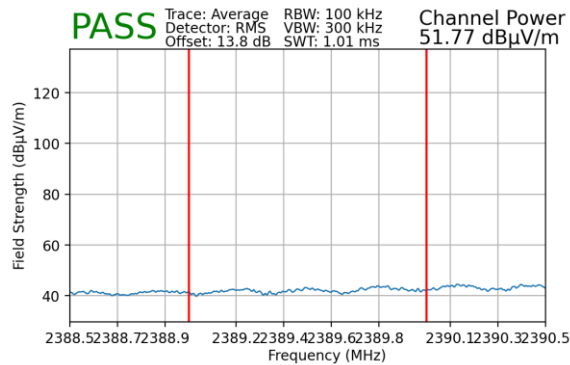


Plot 7-174. Radiated Restricted Lower Band Edge Measurement MIMO (Average)

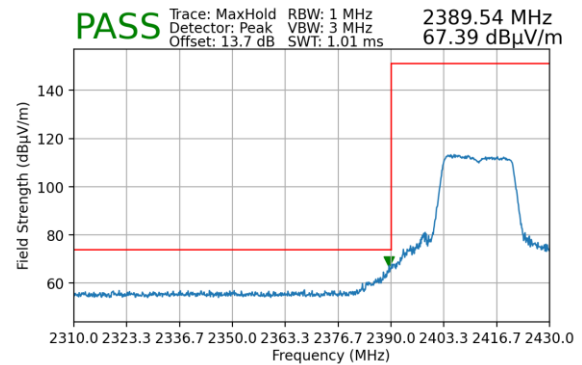


Plot 7-175. Radiated Restricted Lower Band Edge Measurement MIMO (Peak)

Worst Case Mode:	802.11g
Worst Case Transfer Rate:	6Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	2417MHz
Channel:	2

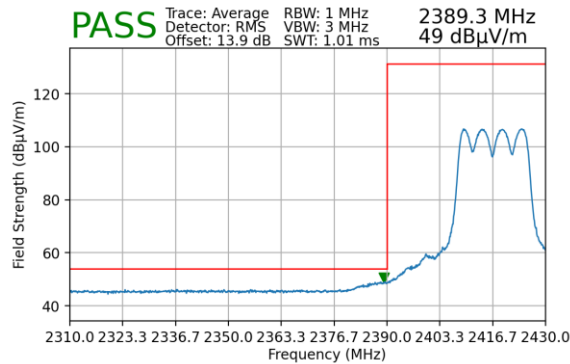


Plot 7-176. Radiated Restricted Lower Band Edge Measurement MIMO (Average)

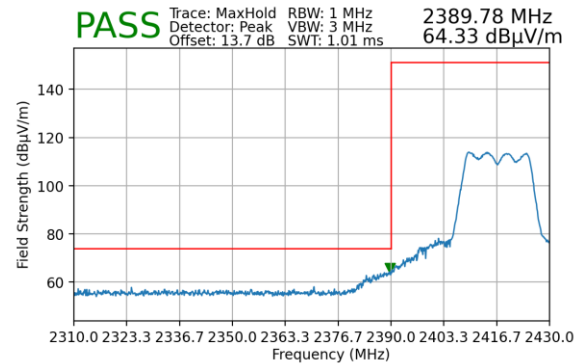


Plot 7-177. Radiated Restricted Lower Band Edge Measurement MIMO (Peak)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04-A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 124 of 135

Worst Case Mode: 802.11ax
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 2457MHz
Channel: 10

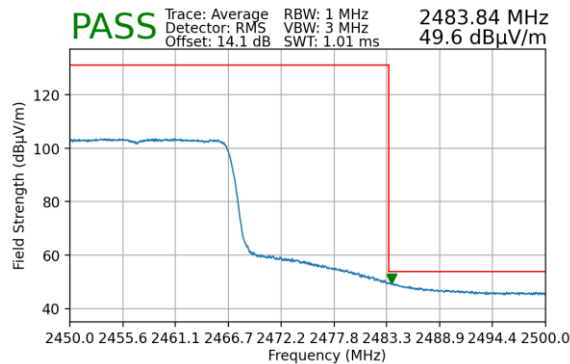


Plot 7-178. Radiated Restricted Upper Band Edge Measurement MIMO (Average)

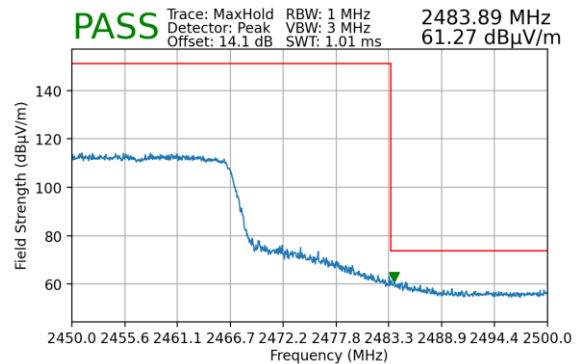


Plot 7-179. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)

Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11

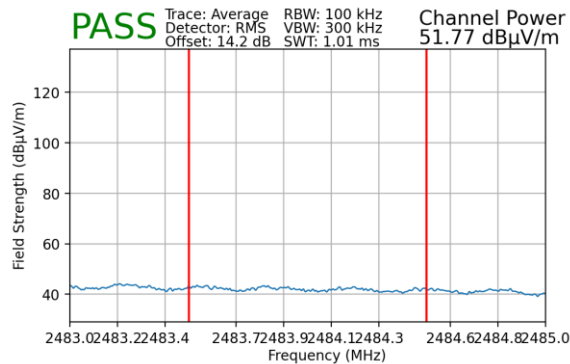


Plot 7-180. Radiated Restricted Upper Band Edge Measurement MIMO (Average)

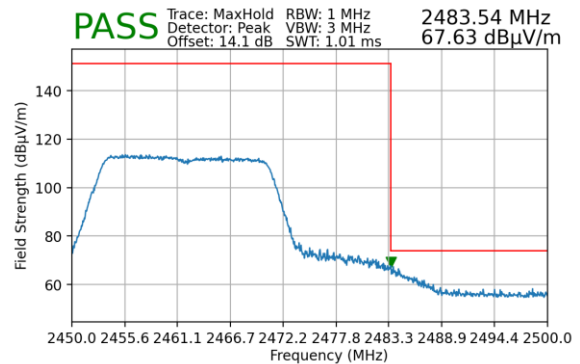


Plot 7-181. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 125 of 135

Worst Case Mode: 802.11ax
Worst Case Transfer Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 2467MHz
Channel: 12

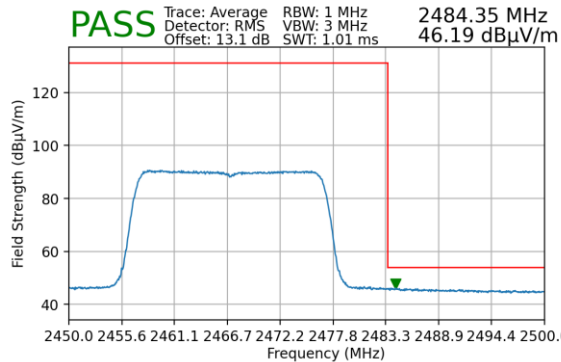


Plot 7-182. Radiated Restricted Upper Band Edge Measurement MIMO (Average)

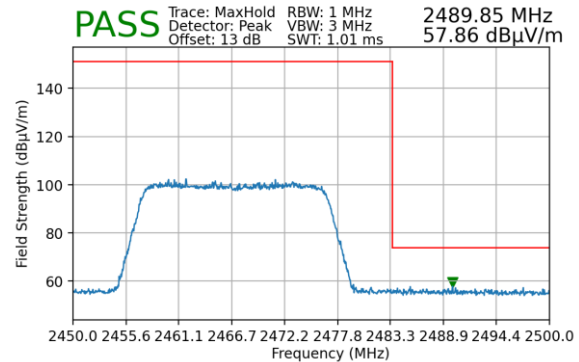


Plot 7-183. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)

Worst Case Mode: 802.11n
Worst Case Transfer Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 2472MHz
Channel: 13

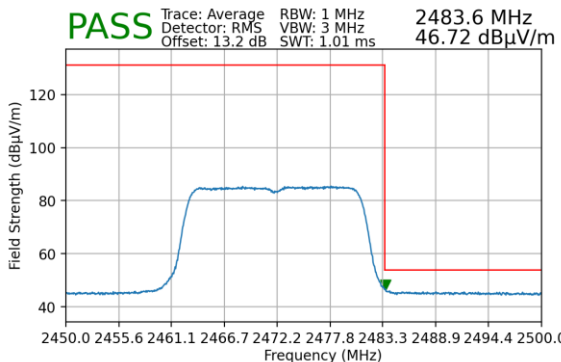

Plot 7-184. Radiated Restricted Upper Band Edge Measurement MIMO (Average)

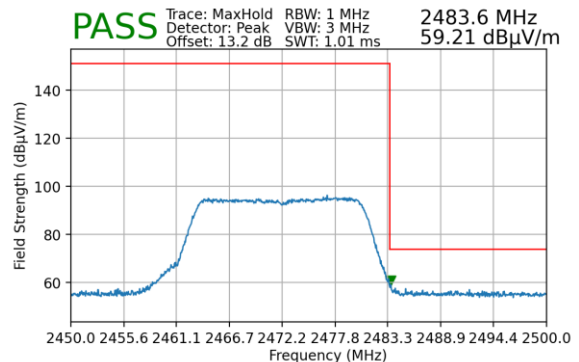

Plot 7-185. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 126 of 135

7.8 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-19 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-19. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 127 of 135

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

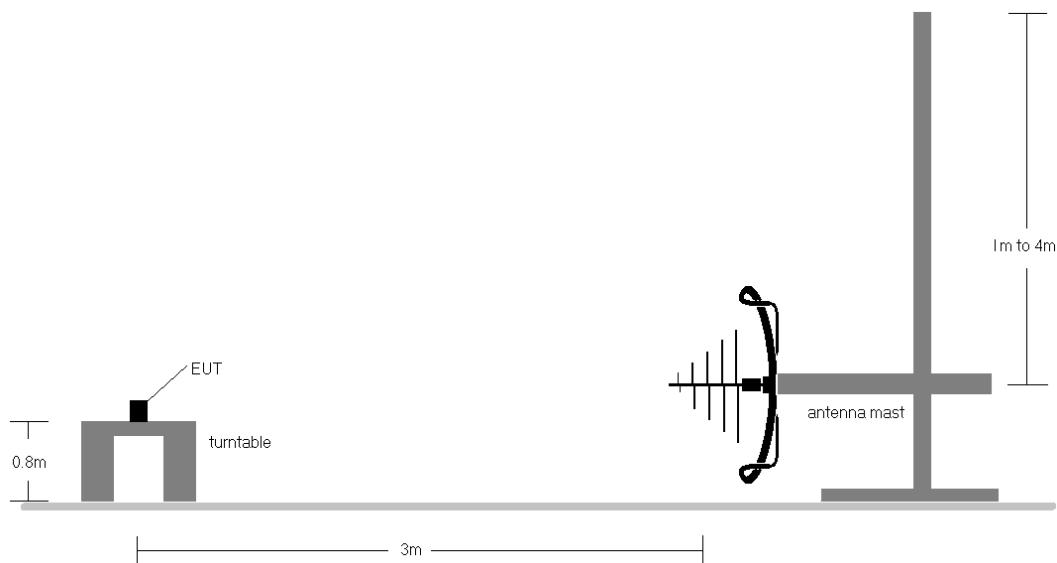


Figure 7-8. Radiated Test Setup < 1GHz

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 128 of 135


Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen(8.10) are below the limit shown in Table 7-19.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 129 of 135

MIMO Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

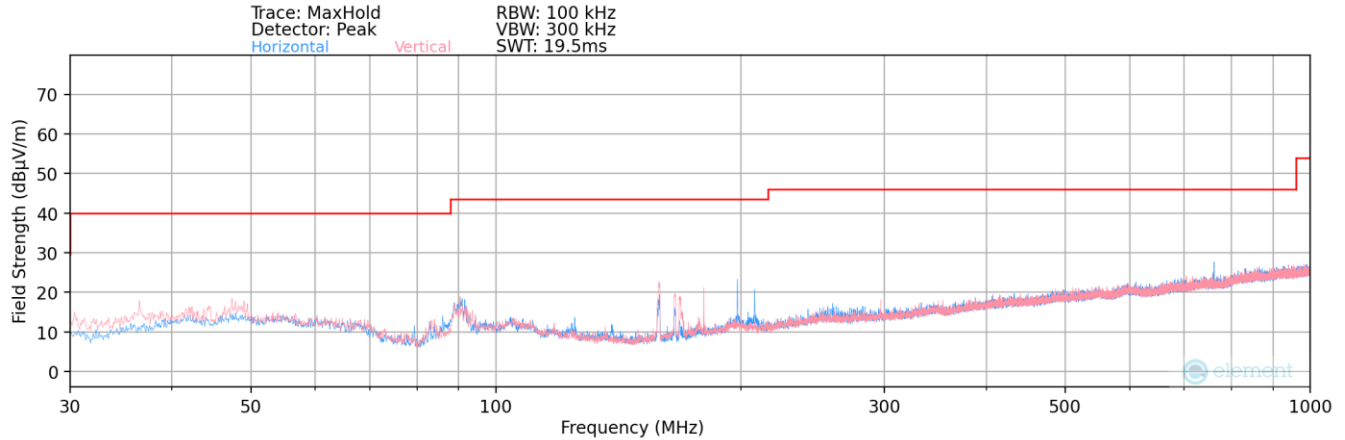

Plot 7-186. Radiated Spurious Plot below 1GHz MIMO

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
125.00	Quasi-Peak	H	201	241	-111.20	9.75	5.55	43.52	-37.97
158.62	Quasi-Peak	H	215	253	-110.90	9.34	5.44	43.52	-38.08
166.25	Quasi-Peak	H	200	258	-105.60	9.58	10.98	43.52	-32.55
198.00	Quasi-Peak	H	209	255	-106.80	12.59	12.79	43.52	-30.73
207.87	Quasi-Peak	H	193	265	-104.50	11.73	14.23	43.52	-29.30
836.94	Quasi-Peak	H	-	-	-114.10	23.84	16.74	46.02	-29.28

Table 7-20. Radiated Spurious Emissions below 1GHz MIMO

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 130 of 135

7.9 Line-Conducted Test Data

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below per §15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-21. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 131 of 135

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


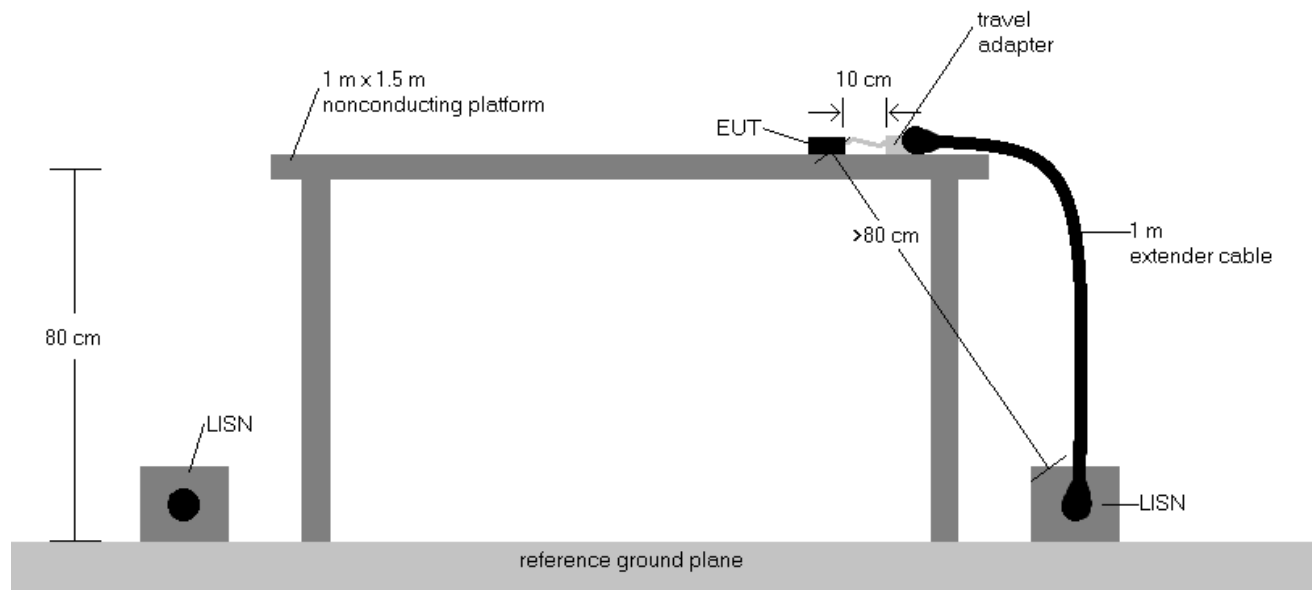


Figure 7-9. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP\AV Level (dB}\mu\text{V)} = \text{QP\AV Analyzer\Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP\AV Limit (dB}\mu\text{V)} - \text{QP\AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 132 of 135

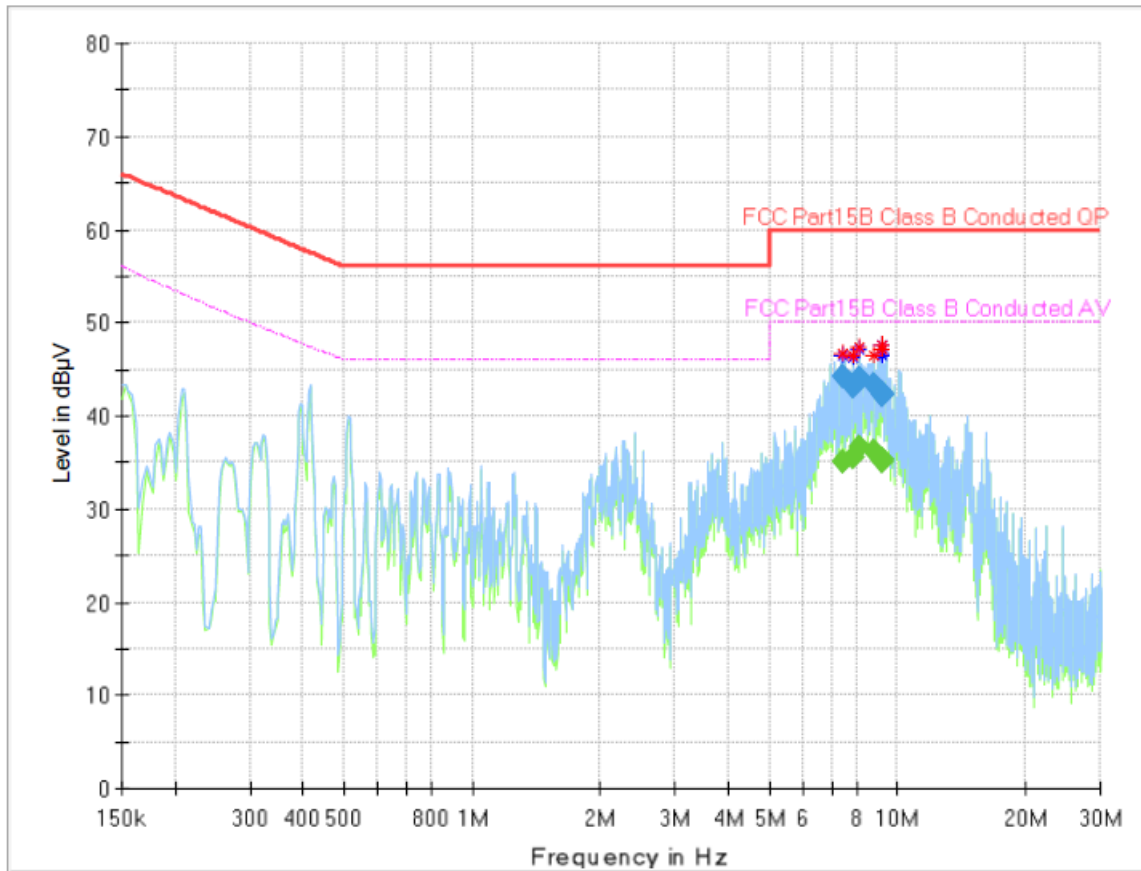


Plot 7-187. Line Conducted Plot with 802.11b (L1)

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
7.412505	---	35.06	50.00	14.94	1000.0	9.000	L1	10.1
7.412505	44.30	---	60.00	15.70	1000.0	9.000	L1	10.1
7.875180	---	35.64	50.00	14.36	1000.0	9.000	L1	10.1
7.875180	43.12	---	60.00	16.88	1000.0	9.000	L1	10.1
8.134875	---	36.57	50.00	13.43	1000.0	9.000	L1	10.1
8.134875	44.01	---	60.00	15.99	1000.0	9.000	L1	10.1
8.809485	---	36.23	50.00	13.77	1000.0	9.000	L1	10.1
8.809485	43.39	---	60.00	16.61	1000.0	9.000	L1	10.1
9.182610	---	35.34	50.00	14.66	1000.0	9.000	L1	10.1
9.182610	42.31	---	60.00	17.69	1000.0	9.000	L1	10.1
9.209475	---	35.32	50.00	14.68	1000.0	9.000	L1	10.1
9.209475	42.33	---	60.00	17.67	1000.0	9.000	L1	10.1
9.242310	---	35.09	50.00	14.91	1000.0	9.000	L1	10.1
9.242310	42.38	---	60.00	17.62	1000.0	9.000	L1	10.1

Table 7-22. Line Conducted Data with 802.11b (L1)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04-A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 133 of 135

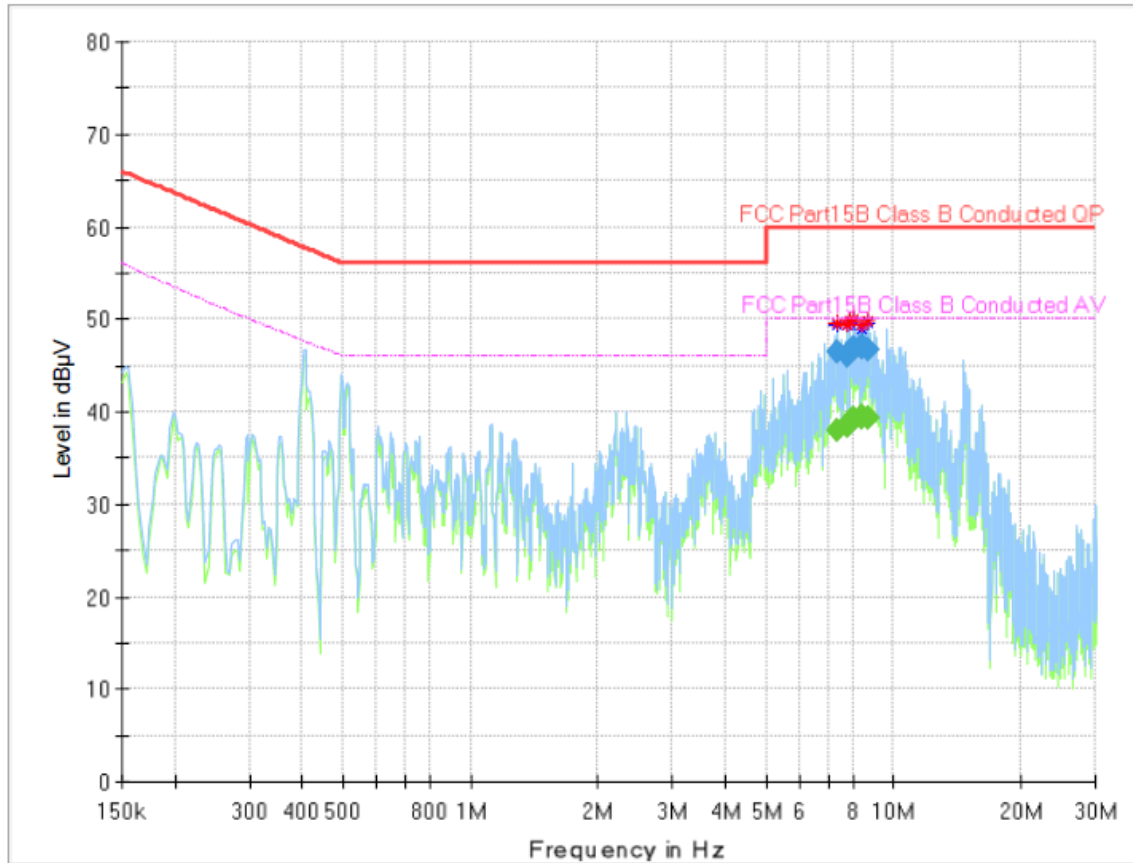

Plot 7-188. Line Conducted Plot with 802.11b (N)

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
7.352805	---	37.98	50.00	12.02	1000.0	9.000	N	10.1
7.352805	46.46	---	60.00	13.54	1000.0	9.000	N	10.1
7.773690	---	38.53	50.00	11.47	1000.0	9.000	N	10.1
7.773690	46.10	---	60.00	13.90	1000.0	9.000	N	10.1
7.896075	---	38.84	50.00	11.16	1000.0	9.000	N	10.1
7.896075	46.49	---	60.00	13.51	1000.0	9.000	N	10.1
8.048310	---	39.39	50.00	10.61	1000.0	9.000	N	10.1
8.048310	46.82	---	60.00	13.18	1000.0	9.000	N	10.1
8.427405	---	39.48	50.00	10.52	1000.0	9.000	N	10.1
8.427405	46.95	---	60.00	13.05	1000.0	9.000	N	10.1
8.430390	---	39.40	50.00	10.60	1000.0	9.000	N	10.1
8.430390	47.06	---	60.00	12.94	1000.0	9.000	N	10.1
8.684115	---	39.29	50.00	10.71	1000.0	9.000	N	10.2
8.684115	46.81	---	60.00	13.19	1000.0	9.000	N	10.2

Table 7-23. Line Conducted Data with 802.11b (N)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04-A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 134 of 135

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Tablet FCC ID: A3LSMX910** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the ISSED Canada rules.

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-04.A3L	Test Dates: 04/03/2023 - 05/18/2023	EUT Type: Portable Tablet	Page 135 of 135