

**ELEMENT WASHINGTON DC LLC**

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.290.6654

<http://www.element.com>**MEASUREMENT REPORT**
FCC Part 15.247 / ISD RSS-247Bluetooth**Applicant Name:**

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

05/13/2025 - 07/01/2025

Test Report Issue Date:

07/08/2025

Test Site/Location:

Element Lab., Columbia, MD, USA

Test Report Serial No.:

1M2505130048-01.A3L

FCC ID:**A3LSMX930****IC:****649E-SMX930****APPLICANT:****Samsung Electronics Co., Ltd.****Application Type:**

Certification

Model/HVIN:

SM-X930

EUT Type:

Portable Tablet

Max. RF Output Power:

64.863 mW (18.12 dBm) Peak Conducted

Frequency Range:

2402 – 2480MHz

Type of Modulation:GFSK, $\pi/4$ -DQPSK, 8DPSK**FCC Classification:**

FCC Part 15 Spread Spectrum Transmitter (DSS)

ISED Specification(s):

RSS-247 Issue 3

Test Procedure(s):

ANSI C63.10:2020

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10:2020. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez
Executive Vice President



FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 1 of 89

TABLE OF CONTENTS

1.0	INTRODUCTION	3
1.1	Scope	3
1.2	Element Test Location	3
1.3	Test Facility / Accreditations	3
2.0	PRODUCT INFORMATION	4
2.1	Equipment Description	4
2.2	Device Capabilities	4
2.3	Antenna Description	4
2.4	Test Configuration	5
2.5	Software and Firmware	5
2.6	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Evaluation Procedure	6
3.2	AC Line Conducted Emissions	6
3.3	Radiated Emissions	7
3.4	Environmental Conditions	7
4.0	ANTENNA REQUIREMENTS	8
5.0	MEASUREMENT UNCERTAINTY	9
6.0	TEST EQUIPMENT CALIBRATION DATA	10
7.0	TEST RESULTS	12
7.1	Summary	12
7.2	20dB Bandwidth Measurement	13
7.3	Output Power Measurement	24
7.4	Band Edge Compliance	45
7.5	Carrier Frequency Separation	50
7.6	Time of Occupancy	53
7.7	Number of Hopping Channels	56
7.8	Conducted Spurious Emissions	59
7.9	Radiated Spurious Emission Measurements – Above 1GHz	66
7.10	Radiated Restricted Band Edge Measurements	77
7.11	Radiated Spurious Emissions Measurements – Below 1GHz	81
7.12	Line Conducted Measurement Data	86
8.0	CONCLUSION	89

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 2 of 89

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

Measurements were conducted at the Element laboratory(ies) indicated in Section 1.3 below. All measurement facilities are compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 3 of 89

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Tablet FCC ID: A3LSMX930, IC: 649E-SMX930**. The test data contained in this report pertains only to the emissions due to the EUT's Bluetooth transmitter.

- This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following:
 - A) The hopping sequence is pseudorandom
 - B) All channels are used equally on average
 - C) The receiver input bandwidth equals the transmit bandwidth
 - D) The receiver hops in sequence with the transmit signal
- 15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.
- 15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection/hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.
- 15.247(h): The EUT employs Adaptive Frequency Hopping (AFH) which identifies sources of interference namely devices operating in 802.11 WLAN and excludes them from the list of available channels. The process of re-mapping reduces the number of test channels from 79 channels to a minimum number of 20 channels.

Test Device Serial No.: 08W8P, 08WMW, 08W4T, 08WPT, 031MF, 033AD

2.2 Device Capabilities

This device contains the following capabilities:

802.11 b/g/n/ac/ax/be WLAN, 802.11 a/n/ac/ax/be UNII (5 and 6GHz), BT (1x, EDR, LE), Digitizer

Ch.	Frequency (MHz)
00	2402
:	:
39	2441
:	:
78	2480

Table 2-1. Frequency/ Channel Operations

Note: This device is capable of operating in hopping and non-hopping mode. The EUT can hop between 79 different channels in the 2400 – 2483.5MHz band.

2.3 Antenna Description

The following antenna was used for the testing.

Frequency [GHz]	Antenna-1 Gain (dBi)	Antenna-2 Gain (dBi)
2.4	-9.35	-4.70

Table 2-2. Antenna Peak Gain

Note: This device is capable of operating in hopping and non-hopping mode. The EUT can hop between 79 different channels in the 2400 – 2483.5MHz band.

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 4 of 89

2.4 Test Configuration

The EUT was tested per the guidance of ANSI C63.10:2020. ANSI C63.10:2020 was also used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5, 7.6, 7.7, and 7.8 for antenna port conducted emissions test setups. The worst case radiated emissions data is shown in this report.

The emissions below 1GHz and above 18GHz were tested with the highest transmitting power channel and the worst-case configuration.

For AC line conducted and radiated test below 1GHz, following configuration were investigated and EUT powered by AC/DC was the worst case.

- EUT powered by AC/DC adaptor via USB cable with wire charger
- EUT powered by host PC via USB cable with wire charger

$\pi/4$ -DQPSK has been investigated and confirmed as not the worst case.

2.5 Software and Firmware

The test was conducted with software/firmware version X930XXU0AYF2 installed on the EUT.

2.6 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 5 of 89

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10:2020) was used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1-meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that the cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst-case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.12. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 6 of 89

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3-meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst-case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 7 of 89

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 8 of 89

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10:2020. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

Table 5-1. Measurement Uncertainty Budget

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 9 of 89

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurement antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	BT1	Bluetooth Cable Set	2/25/2025	Annual	2/25/2026	BT1
-	MD 1M 18-40	EMC Cable and Switch System	2/25/2025	Annual	2/25/2026	MD 1M 18-40
-	ETS-001	EMC Cable and Switch System	2/25/2025	Annual	2/25/2026	ETS-001
Agilent	N9038A	MXE EMI Receiver	9/16/2024	Annual	9/16/2025	MY51210133
Agilent	N9020A	MXA Signal Analyzer	5/7/2025	Annual	5/7/2026	US46470561
Agilent	N9030A	PXA Signal Analyzer (44GHz)	10/16/2024	Annual	10/16/2025	MY49430494
EMCO	3115	Horn Antenna (1-18GHz)	9/6/2024	Biennial	9/6/2025	9704-5182
Keysight Technologies	N9020A	MXA Signal Analyzer	2/7/2025	Annual	2/7/2026	MY53421544
Keysight Technologies	N9030B	PXA Signal Analyzer	9/19/2024	Annual	9/19/2025	MY57141001
Pasternack	NMLC-2	Line Conducted Emissions Cable	3/25/2025	Annual	3/25/2026	NMLC-2
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	10/16/2024	Annual	10/16/2025	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	11/25/2024	Annual	11/25/2025	100348
Sunol	JB5	Bi-Log Antenna (20M-5GHz)	9/11/2024	Biennial	9/11/2026	A051107

Table 6-1. Test Equipment Calibration Table

Component	Serial Number
MegaPhase Cable TM26-S1S1-36	18160103 003
Pasternack 6dB Attenuator PE7005-6	N/A

Table 6-2. WL25-1 Conducted Cable Set Components

Component	Serial Number
MiniCircuits Cable CBL-2FT-SMSM+	77743
MCL 6dB Attenuator BW-S6W2+	1314

Table 6-3. WL25-2 Conducted Cable Set Components

Component	Serial Number
MegaPhase Cable TM40K1K1-36	18160102 001
MCL 10dB Attenuator BW-K10 2W44+	1902

Table 6-4. WL40-1 Conducted Cable Set Components

Component	Serial Number
Pasternak Cable RG214/U	111815
Sucoflex Cable 106A	246420-001
Rohde & Schwarz SF Unit	102134

Table 6-5. ETS-001 EMC Cable and Switch System Components

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 10 of 89

Component	Serial Number
MiniCircuits Cable CBL-0.5M-SMNM+	47261
Micro-Coax Utiflex Cable UFB311A-Q-3346-50U50U MFR 64639	231978-001
Micro-Coax Utiflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-002
MegaPhase Cable NC29-N1N1-324	19046401 001
MegaPhase Flex Cable 10511-1	15044701-006
Micro-Coas Utiflex Cable UFB311A-Q-3446-50U50U MFR 64639	231978-002
Micro-Coas Utiflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-001
Micro-Coas Utiflex Cable UFB142A-0-0659-50U50U MFR 64639	232069-001
Rohde & Schwarz SF Unit	102138

Table 6-6. AP2-001 EMC Cable and Switch System Components

Component	Serial Number
MegaPhase Cable TM40-K1K1-30	20233002-004
UTIPLEX Cable	64639 232063-001
Rohde & Schwarz Pre-amp RS-PR1840 18G-40G	9037.7670.02

Table 6-7. MD 1M 18-40 EMC Cable and Switch System Components

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 11 of 89

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMX930
 IC: 649E-SMX930
 Method/System: Frequency Hopping Spread Spectrum (FHSS)
 Number of Channels: 79

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(1)(iii)	RSS-247 [5.1(1)]	20dB Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
15.247(b)(1)	RSS-247 [5.4(2)]	Peak Transmitter Output Power	< 1 Watt if ≥ 75 non-overlapping channels used		PASS	Section 7.3
15.247(a)(1)	RSS-247 [5.1(2)]	Channel Separation	> 2/3 of 20 dB BW for systems with Output Power < 125mW		PASS	Section 7.5
15.247(a)(1)(iii)	RSS-247 [5.1(4)]	Number of Channels	> 15 Channels		PASS	Section 7.7
15.247(a)(1)(iii)	RSS-247 [5.1(4)]	Time of Occupancy	< 0.4 sec in 31.6 sec period		PASS	Section 7.6
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	Conducted > 20dBc		PASS	Section 7.4, Section 7.8
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-247 limits)	RADIATED	PASS	Section 7.9, Section 7.10, Section 7.11
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits (RSS-Gen [8.8] limits)	LINE CONDUCTED	PASS	Section 7.12

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "BT Auto," Version 3.5.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Chamber Automation," Version 1.3.1.

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 12 of 89

7.2 20dB Bandwidth Measurement

§15.247 (a.1.iii); RSS-247 [5.1(1)]

Test Overview and Limit

The bandwidth at 20dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

Test Procedure Used

ANSI C63.10:2020 – Section 6.9.2

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 20dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 20$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% OBW
3. VBW $\geq 3 \times$ RBW
4. Reference level set to keep signal from exceeding maximum input mixer level for linear operation.
5. Detector = Peak
6. Trace mode = max hold
7. Sweep = auto couple
8. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup


Test Notes

None

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 13 of 89


Frequency [MHz]	Data Rate [Mbps]	Mod.	Channel No.	20dB Bandwidth Test Results [kHz]
2402	1.0	GFSK	0	958.70
2441	1.0	GFSK	39	951.70
2480	1.0	GFSK	78	1013.00
2402	2.0	$\pi/4$ -DQPSK	0	1297.00
2441	2.0	$\pi/4$ -DQPSK	39	1329.00
2480	2.0	$\pi/4$ -DQPSK	78	1311.00
2402	3.0	8DPSK	0	1317.00
2441	3.0	8DPSK	39	1291.00
2480	3.0	8DPSK	78	1308.00

Table 7-2. Conducted 20dB Bandwidth Measurements – ANT1

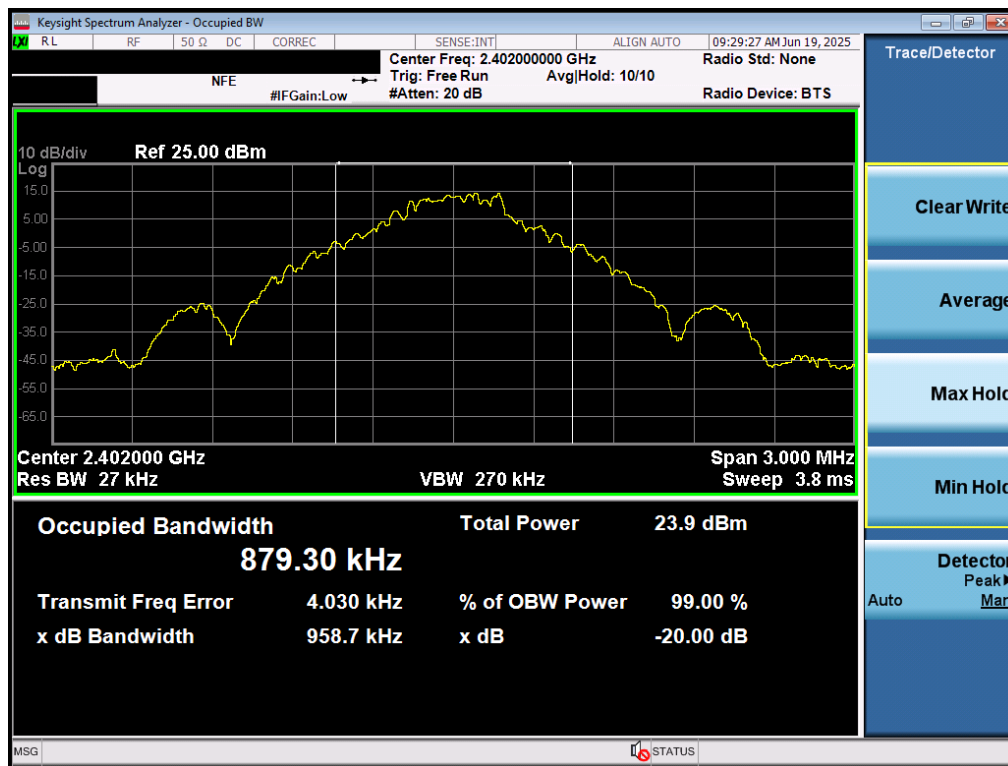


Plot 7-1. 20dB Bandwidth Plot (Bluetooth, 1Mbps – Ch. 0) – ANT1

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 14 of 89

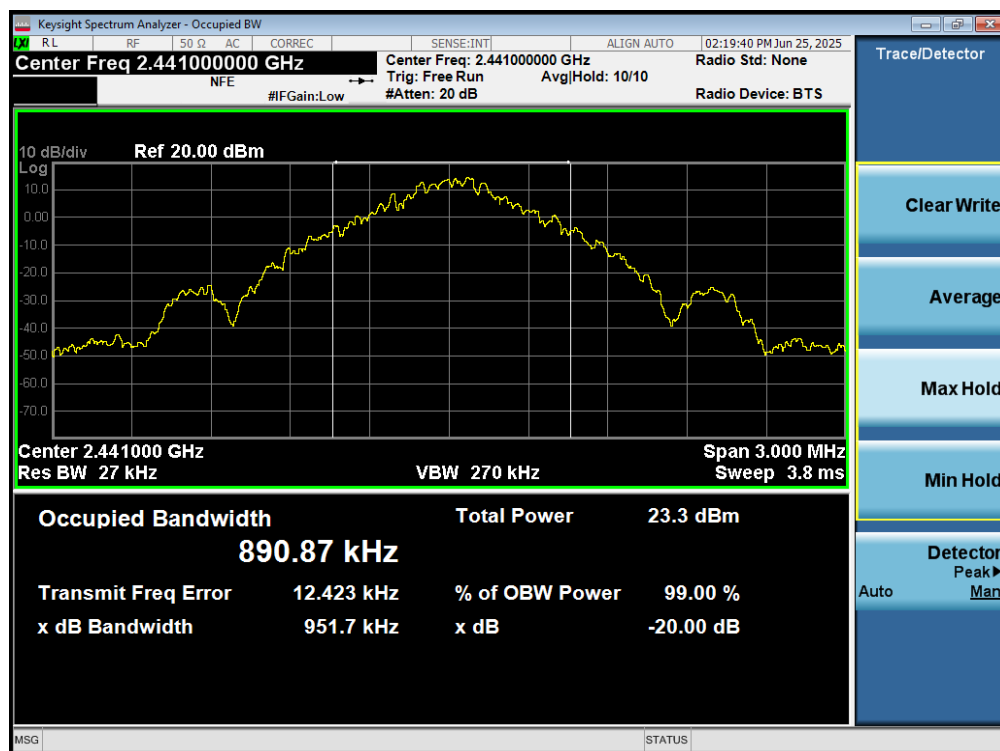


Plot 7-2. 20dB Bandwidth Plot (Bluetooth, 1Mbps – Ch. 39) – ANT1

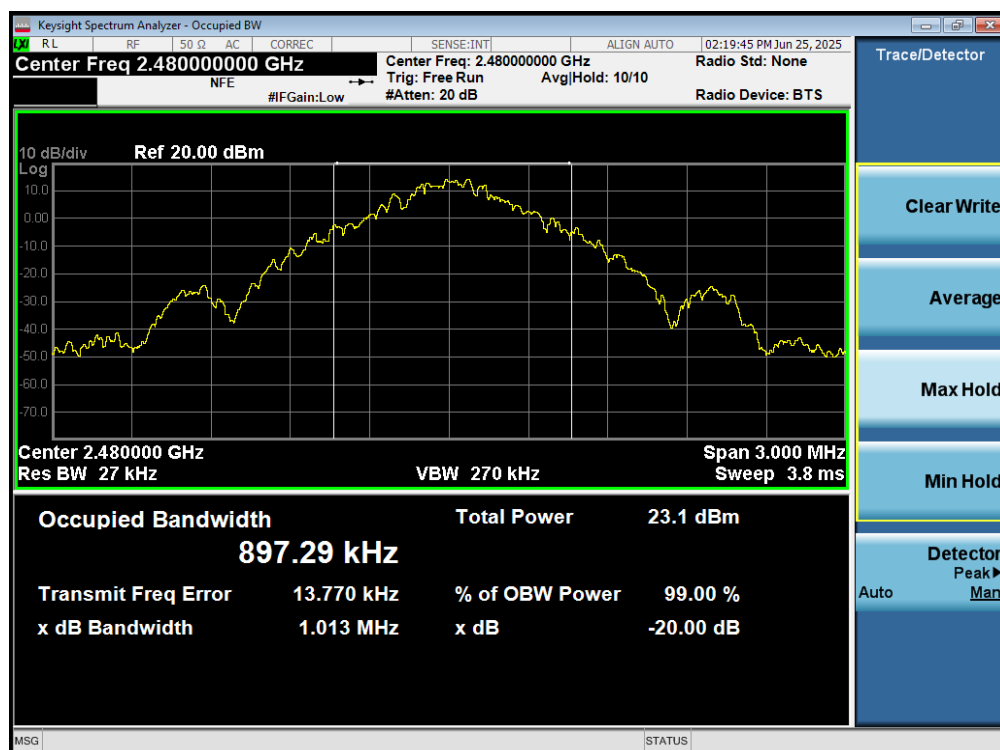


Plot 7-3. 20dB Bandwidth Plot (Bluetooth, 1Mbps – Ch. 78) – ANT1

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 15 of 89

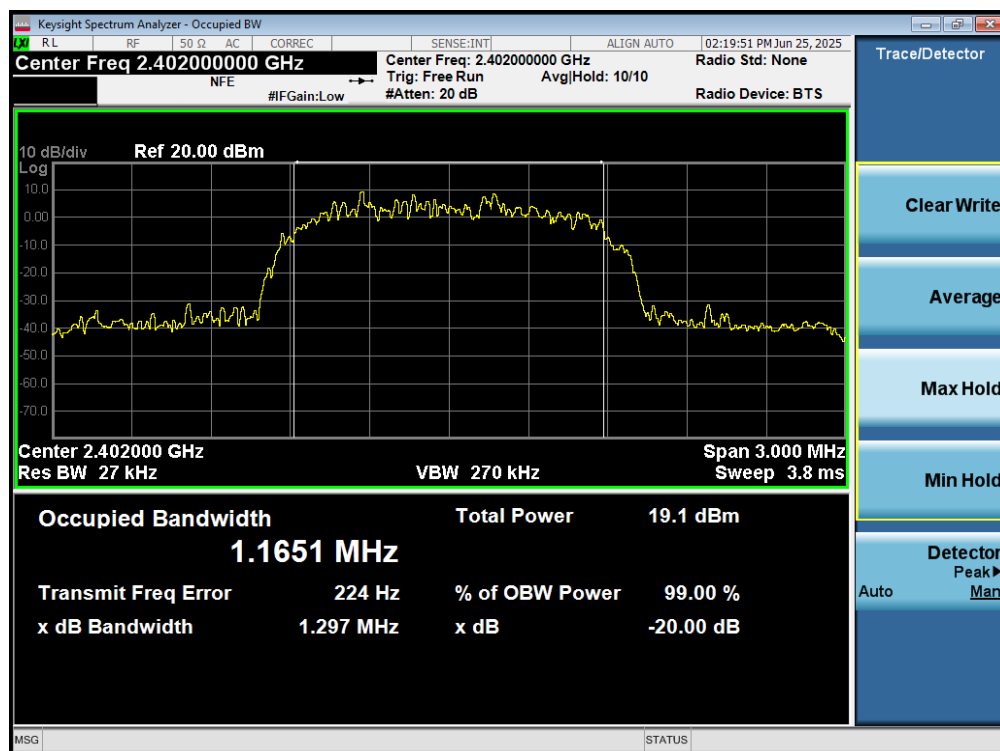


Plot 7-4. 20dB Bandwidth Plot (Bluetooth, 2Mbps – Ch. 0) – ANT1

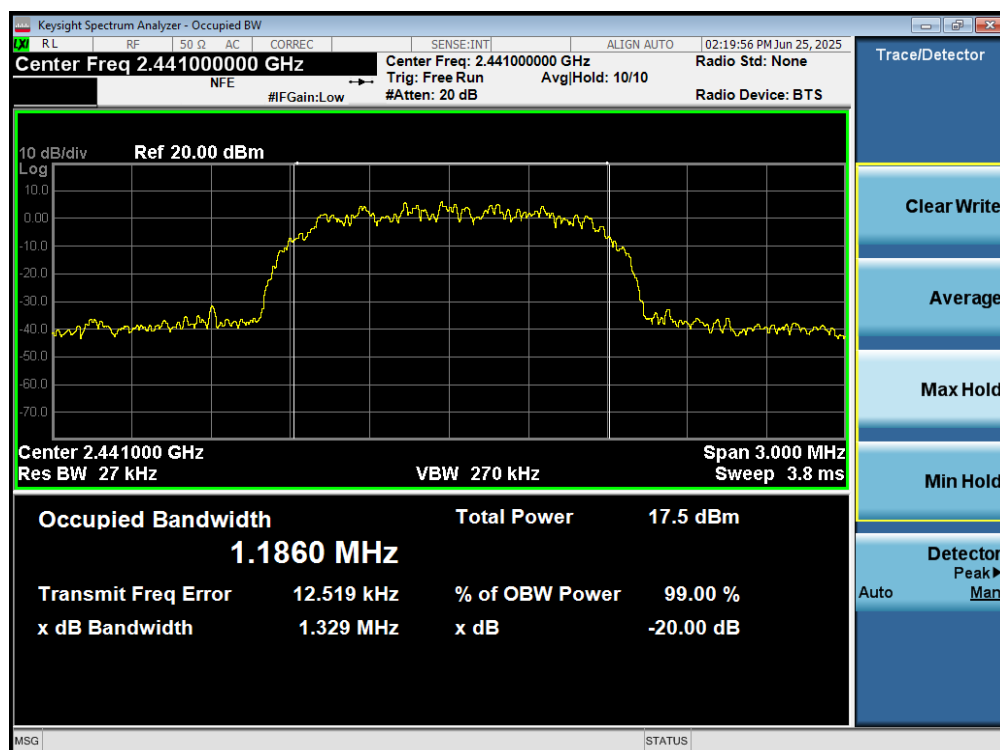


Plot 7-5. 20dB Bandwidth Plot (Bluetooth, 2Mbps – Ch. 39) – ANT1

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 16 of 89

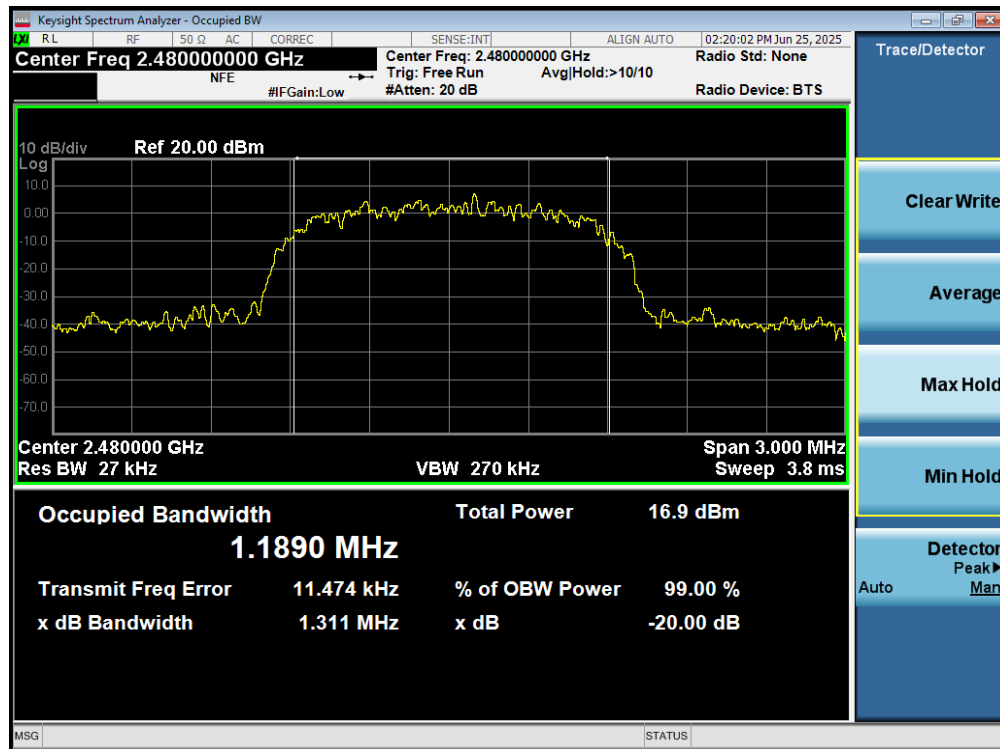


Plot 7-6. 20dB Bandwidth Plot (Bluetooth, 2Mbps – Ch. 78) – ANT1

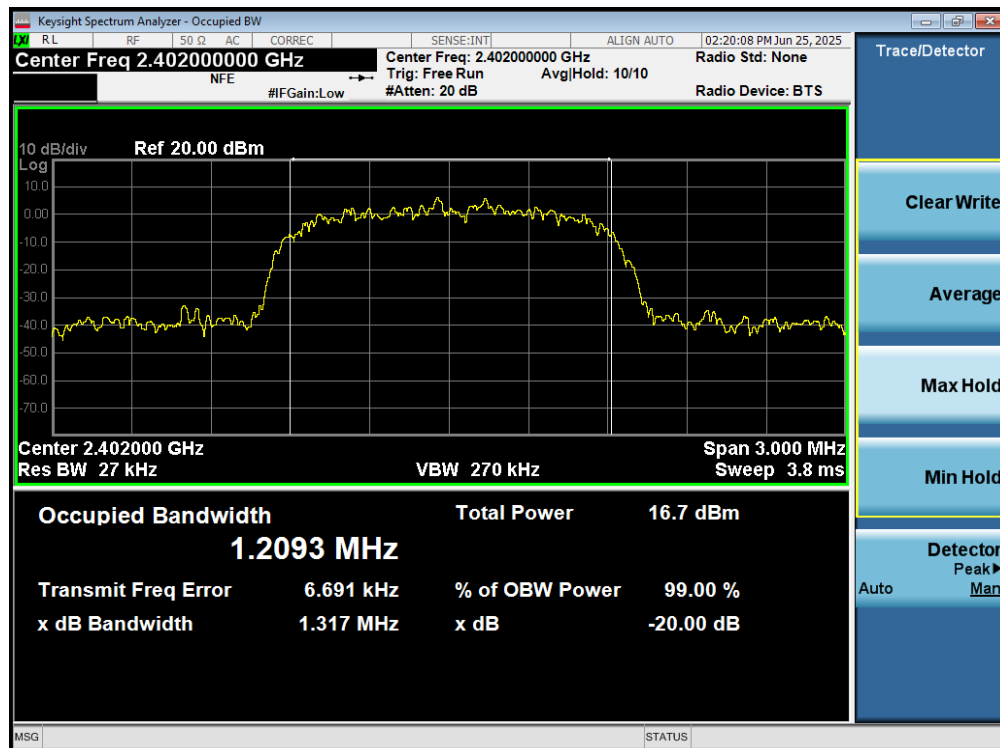


Plot 7-7. 20dB Bandwidth Plot (Bluetooth, 3Mbps – Ch. 0) – ANT1

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 17 of 89

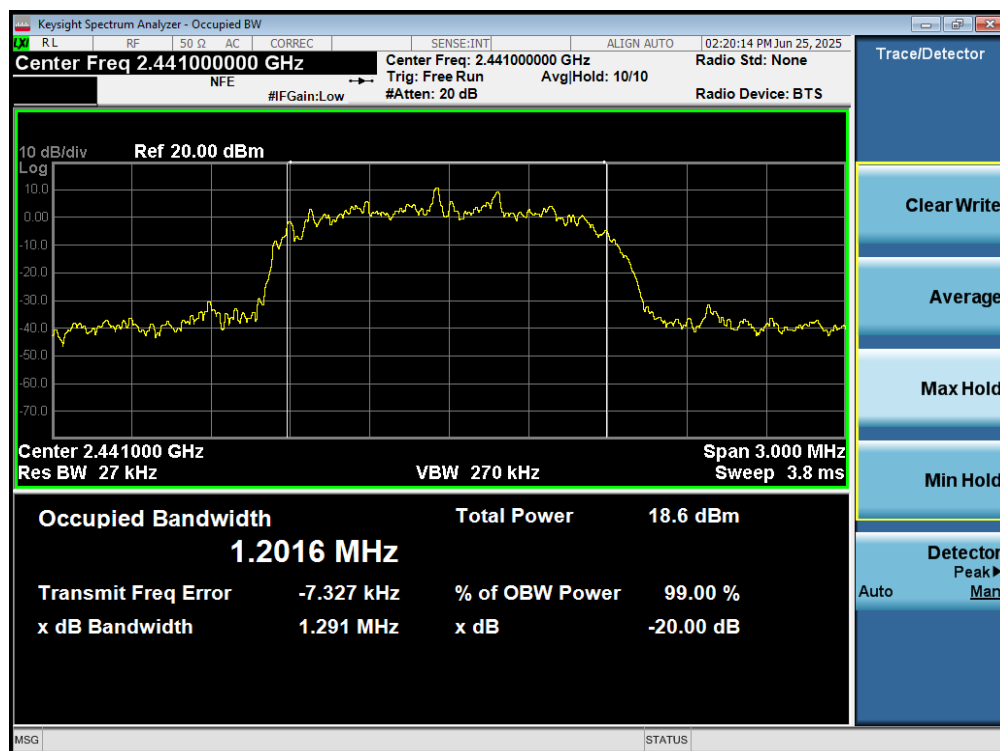

Plot 7-8. 20dB Bandwidth Plot (Bluetooth, 3Mbps – Ch. 39) – ANT1

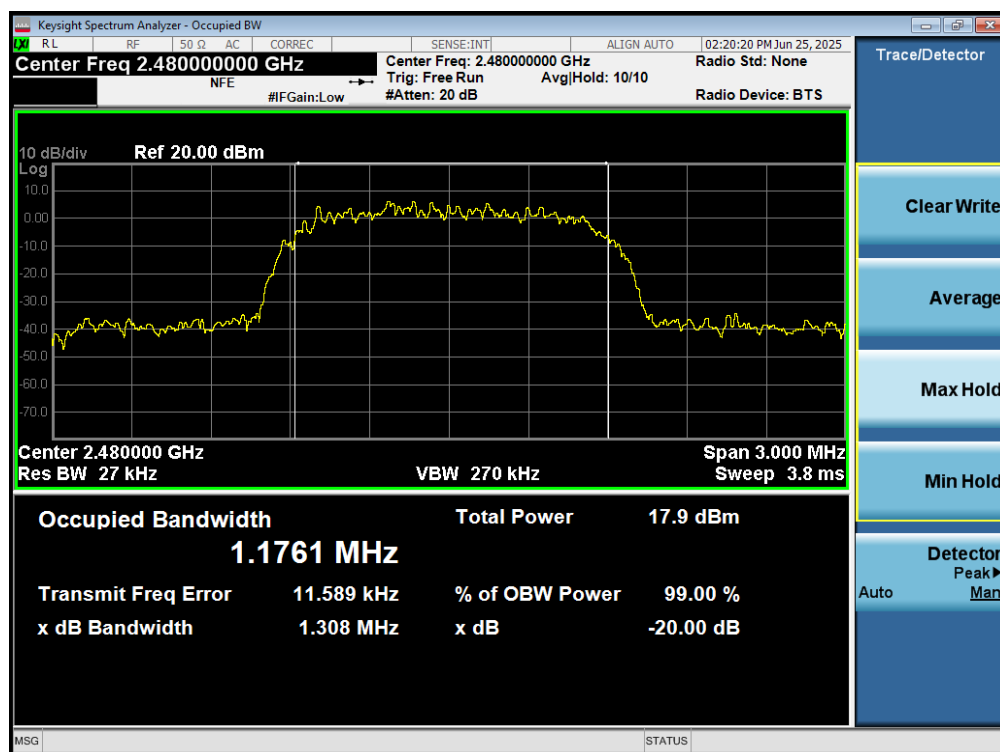


Plot 7-9. 20dB Bandwidth Plot (Bluetooth, 3Mbps – Ch. 78) – ANT1

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 18 of 89

Frequency [MHz]	Data Rate [Mbps]	Mod.	Channel No.	20dB Bandwidth Test Results
2402	1.0	GFSK	0	943.40
2441	1.0	GFSK	39	936.60
2480	1.0	GFSK	78	1020.00
2402	2.0	$\pi/4$ -DQPSK	0	1329.00
2441	2.0	$\pi/4$ -DQPSK	39	1249.00
2480	2.0	$\pi/4$ -DQPSK	78	1283.00
2402	3.0	8DPSK	0	1327.00
2441	3.0	8DPSK	39	1284.00
2480	3.0	8DPSK	78	1253.00

Table 7-3. Conducted 20dB Bandwidth Measurements – ANT2

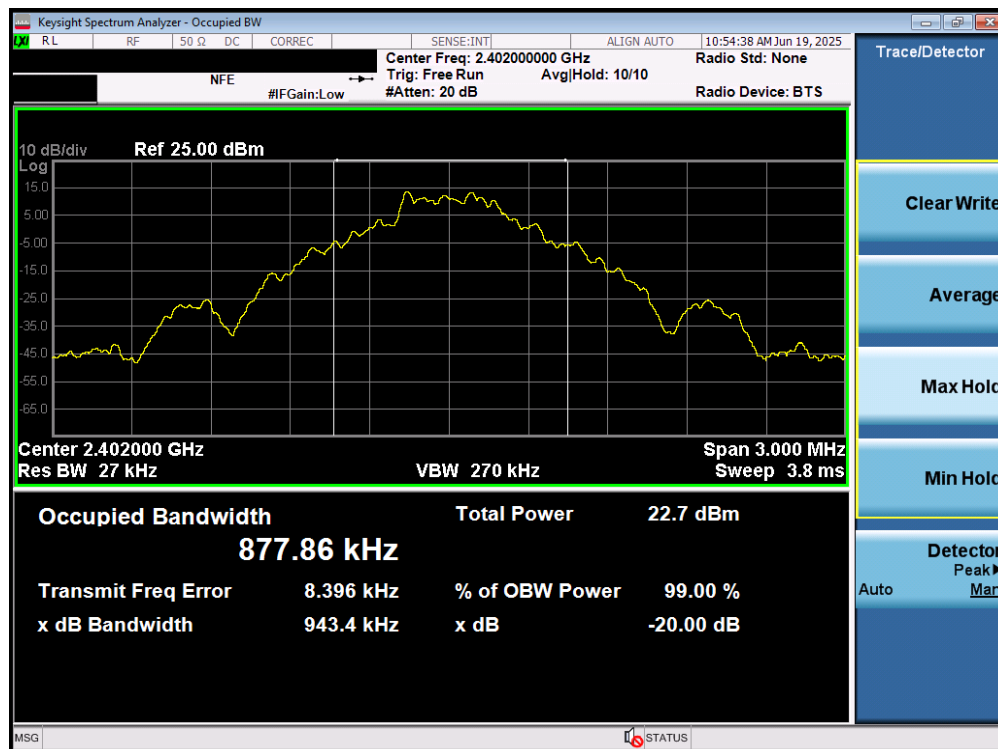

Plot 7-10. 20dB Bandwidth Plot (Bluetooth, 1Mbps – Ch. 0) – ANT2

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 19 of 89




Plot 7-11. 20dB Bandwidth Plot (Bluetooth, 1Mbps – Ch. 39) – ANT2




Plot 7-12. 20dB Bandwidth Plot (Bluetooth, 1Mbps – Ch. 78) – ANT2

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 20 of 89

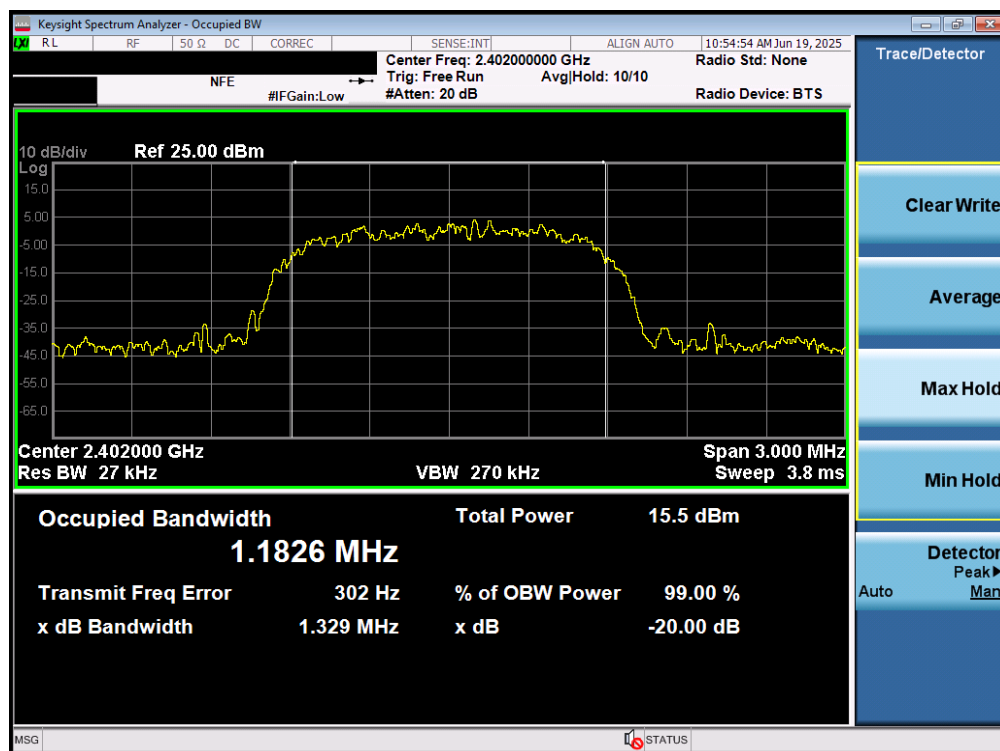


Plot 7-13. 20dB Bandwidth Plot (Bluetooth, 2Mbps – Ch. 0) – ANT2

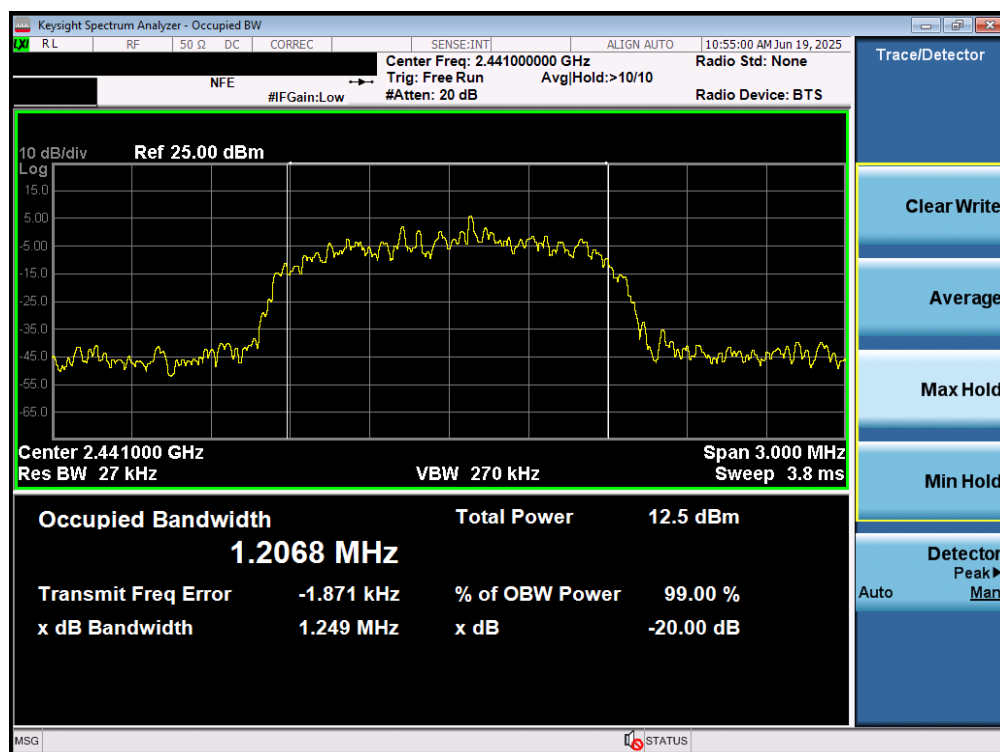


Plot 7-14. 20dB Bandwidth Plot (Bluetooth, 2Mbps – Ch. 39) – ANT2

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 21 of 89

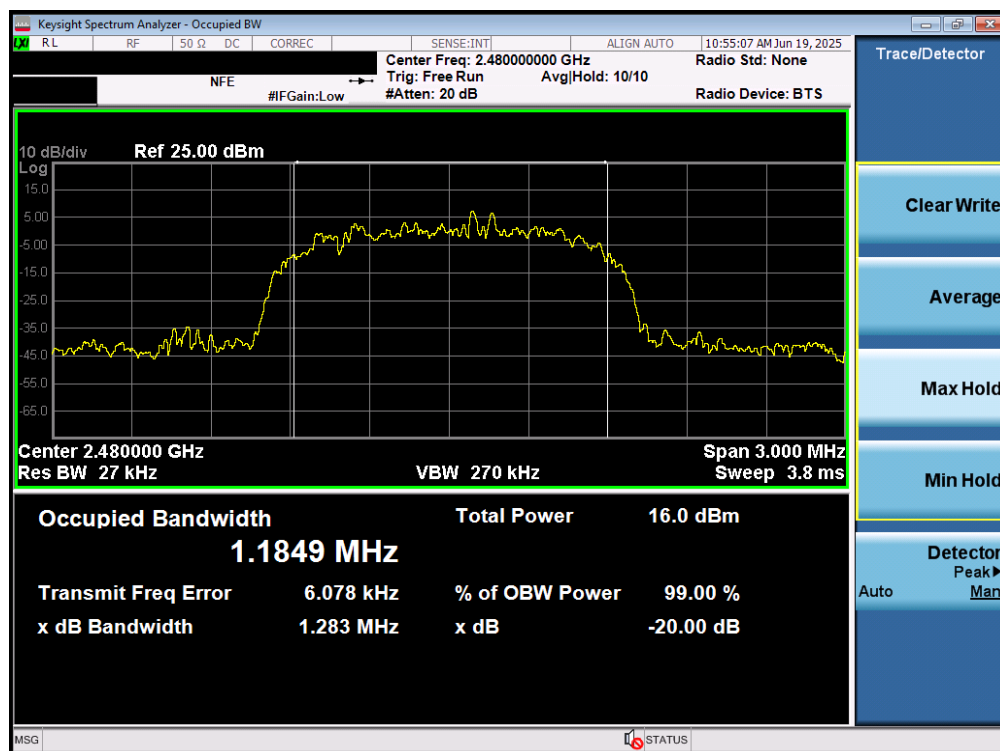


Plot 7-15. 20dB Bandwidth Plot (Bluetooth, 2Mbps – Ch. 78) – ANT2

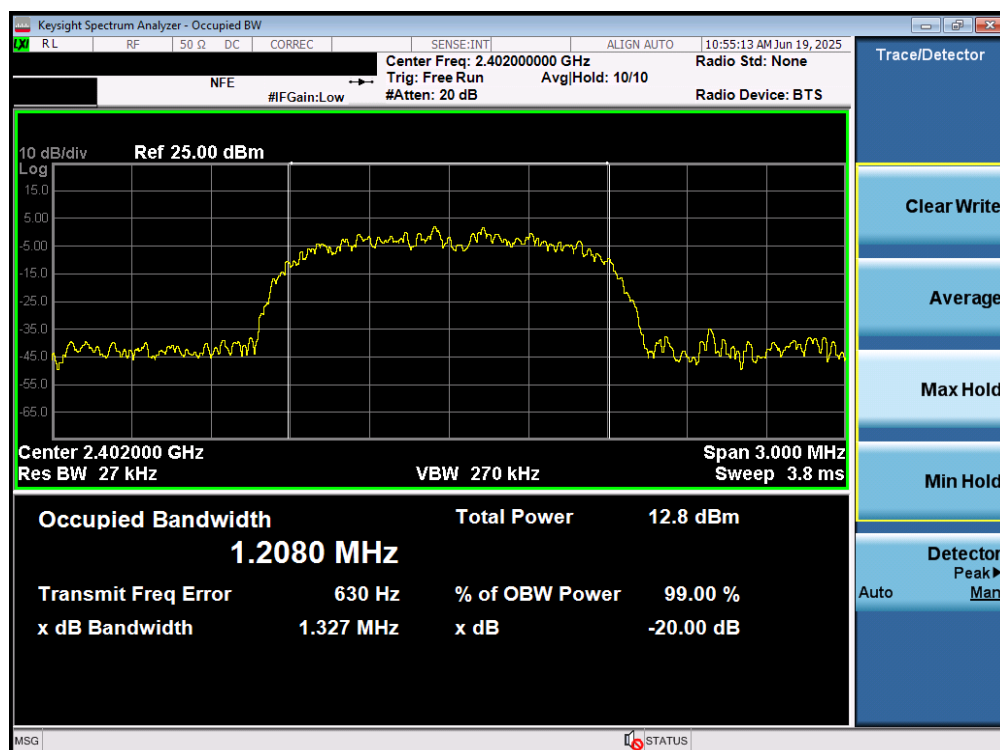


Plot 7-16. 20dB Bandwidth Plot (Bluetooth, 3Mbps – Ch. 0) – ANT2

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 22 of 89

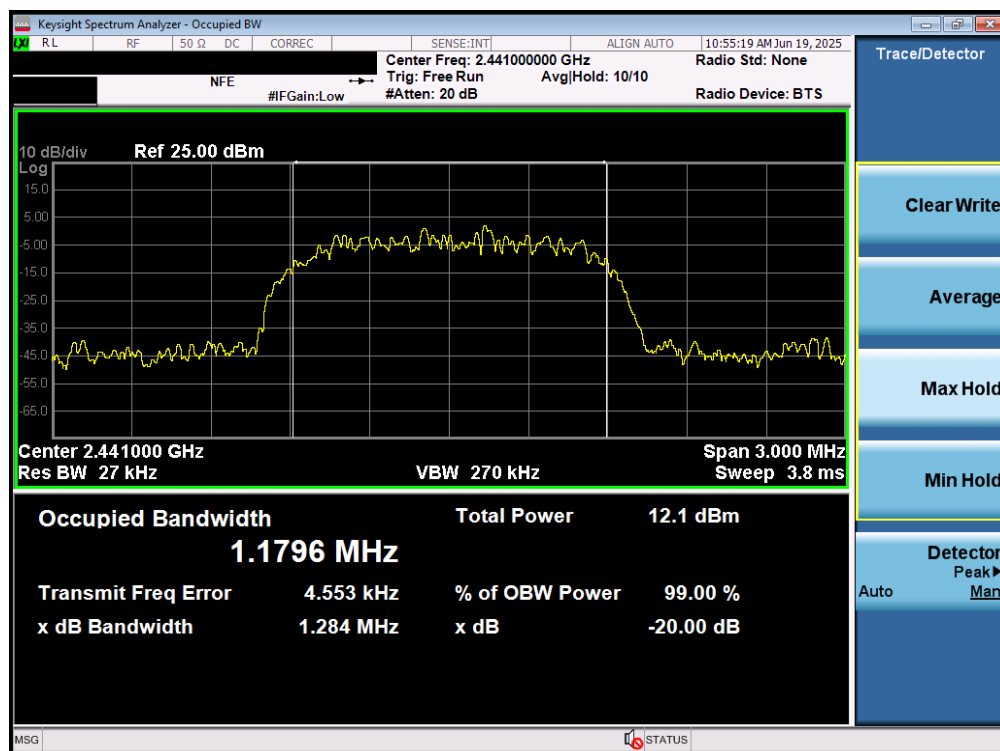

Plot 7-17. 20dB Bandwidth Plot (Bluetooth, 3Mbps – Ch. 39) – ANT2

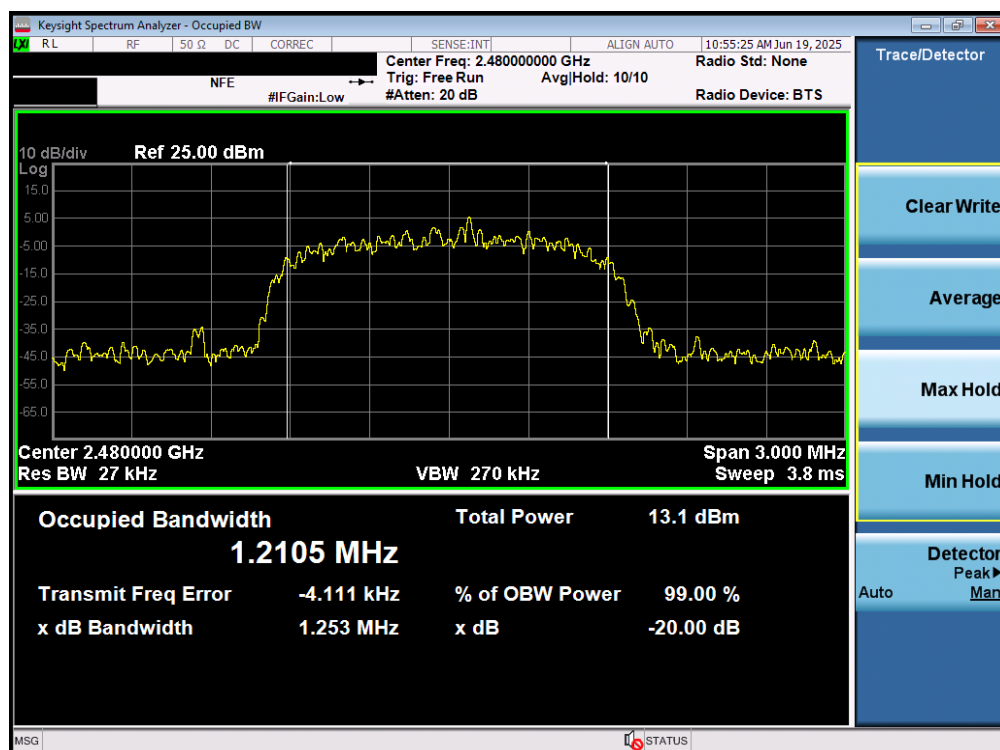

Plot 7-18. 20dB Bandwidth Plot (Bluetooth, 3Mbps – Ch. 78) – ANT2

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 23 of 89

7.3 Output Power Measurement

§15.247 (b.1); RSS-247 [5.4(2)]

Test Overview and Limits

Measurement is made while the EUT is operating in non-hopping transmission mode. The powers shown below were measured using a spectrum analyzer with a Bluetooth signaling test set (Agilent Model: N4010A) used only to maintain a Bluetooth link with the EUT. Average power measurements are performed using the analyzer's "burst power" function with RBW = 3MHz. The burst power function triggers on a single set burst set to maximum power and measures the maximum average power on the on-time.

The maximum permissible output power is 1 Watt.

Test Procedure Used

ANSI C63.10:2020 – Section 7.8.5

Test Settings

Peak Power Measurement

1. Span = approximately 5x 20dB bandwidth, centered on hopping channel
2. RBW > 20dB bandwidth of emission being measured
3. VBW ≥ RBW
4. Sweep = auto
5. Detector = peak
6. Trace mode = max hold
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 24 of 89

Note


This unit was tested with all possible data rates and the highest peak power is reported with the unit transmitting at 3Mbps. The EUT was tested for the average power with a broadband power meter for reporting purposes only. Final results were obtained using calibrated couplers, attenuators and cables. The following formula was used:

$$\text{Output Power (dBm)} = \text{Raw Analyzer Level (dBm)} + \text{Cable Loss (dB)} + \text{Loss in Directional Coupler/Insertion Loss (dB)}$$


Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Peak Conducted Power		Avg Conducted Power	
					[dBm]	[mW]	[dBm]	[mW]
2402	1.0	GFSK	ePA	0	18.10	64.521	17.60	57.544
2441	1.0	GFSK	ePA	39	18.16	65.418	17.49	56.068
2480	1.0	GFSK	ePA	78	17.99	62.893	17.42	55.256
2402	2.0	$\pi/4$ -DQPSK	ePA	0	19.65	92.172	13.83	24.135
2441	2.0	$\pi/4$ -DQPSK	ePA	39	19.75	94.363	14.13	25.884
2480	2.0	$\pi/4$ -DQPSK	ePA	78	17.52	56.520	14.11	25.739
2402	3.0	8DPSK	ePA	0	18.62	72.728	13.91	24.583
2441	3.0	8DPSK	ePA	39	18.93	78.109	14.20	26.278
2480	3.0	8DPSK	ePA	78	17.74	59.361	14.15	26.031

Table 7-4. Conducted Output Power Measurements – ANT1

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 25 of 89

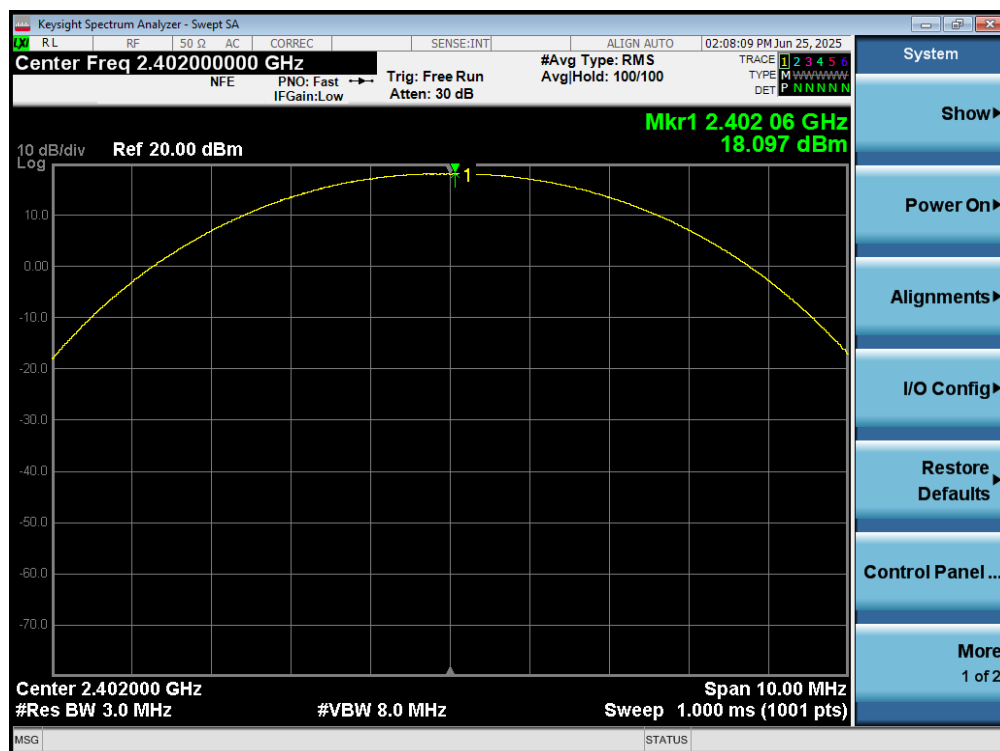


Plot 7-19. Peak Conducted Power (1Mbps – Ch. 0) – ANT1

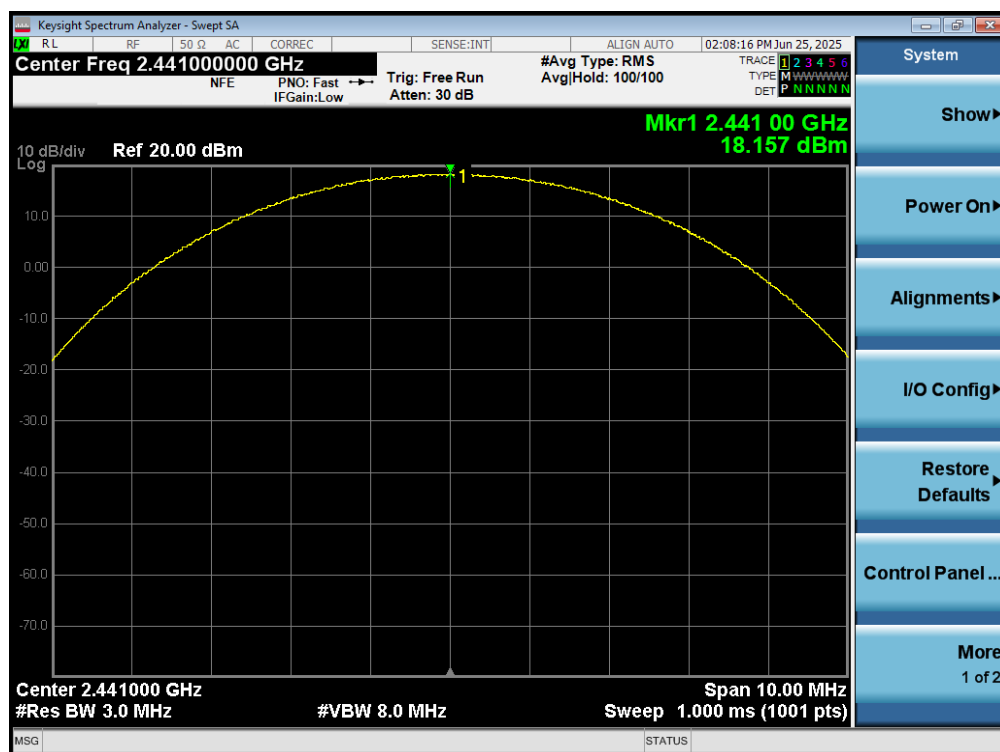


Plot 7-20. Peak Conducted Power (1Mbps – Ch. 39) – ANT1

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 26 of 89

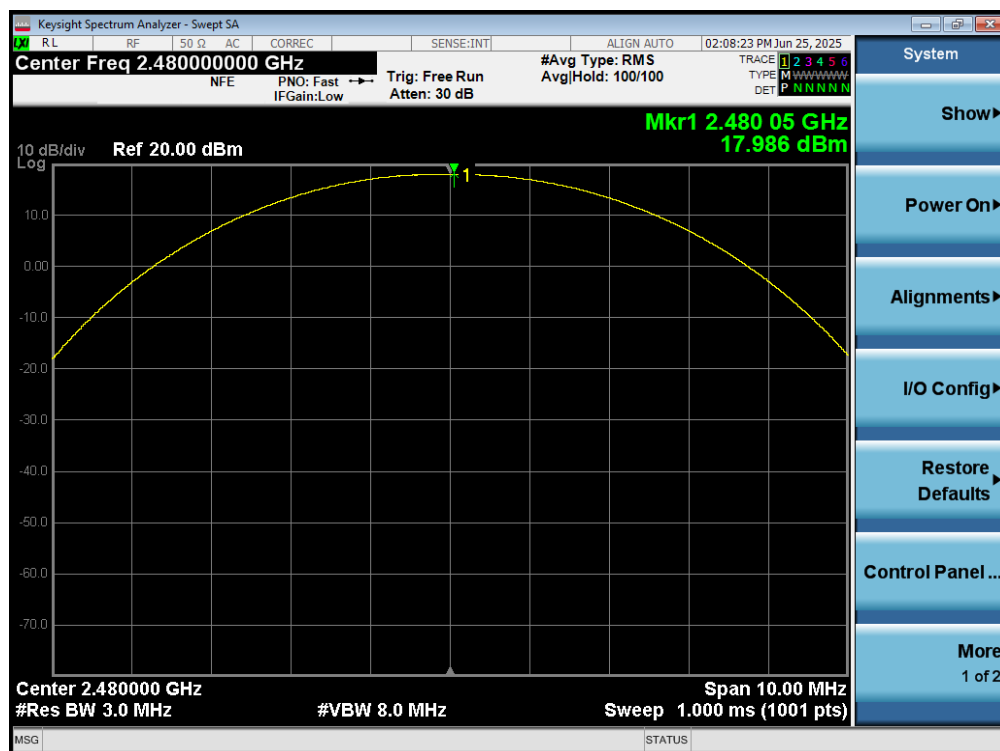


Plot 7-21. Peak Conducted Power (1Mbps – Ch. 78) – ANT1

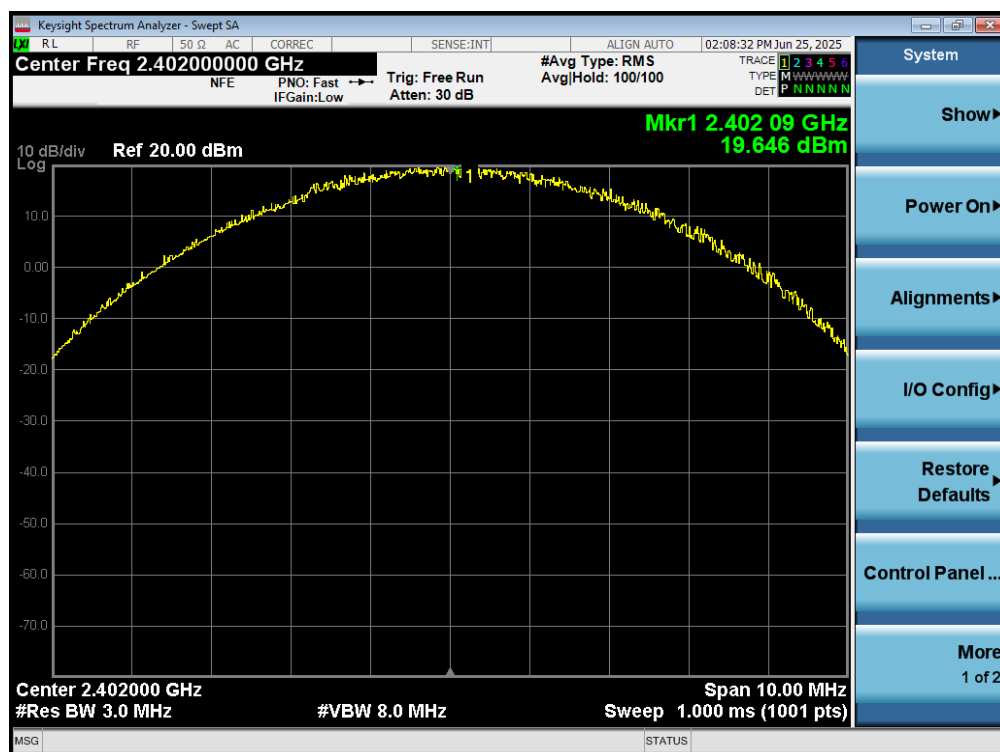


Plot 7-22. Peak Conducted Power (2Mbps – Ch. 0) – ANT1

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 27 of 89

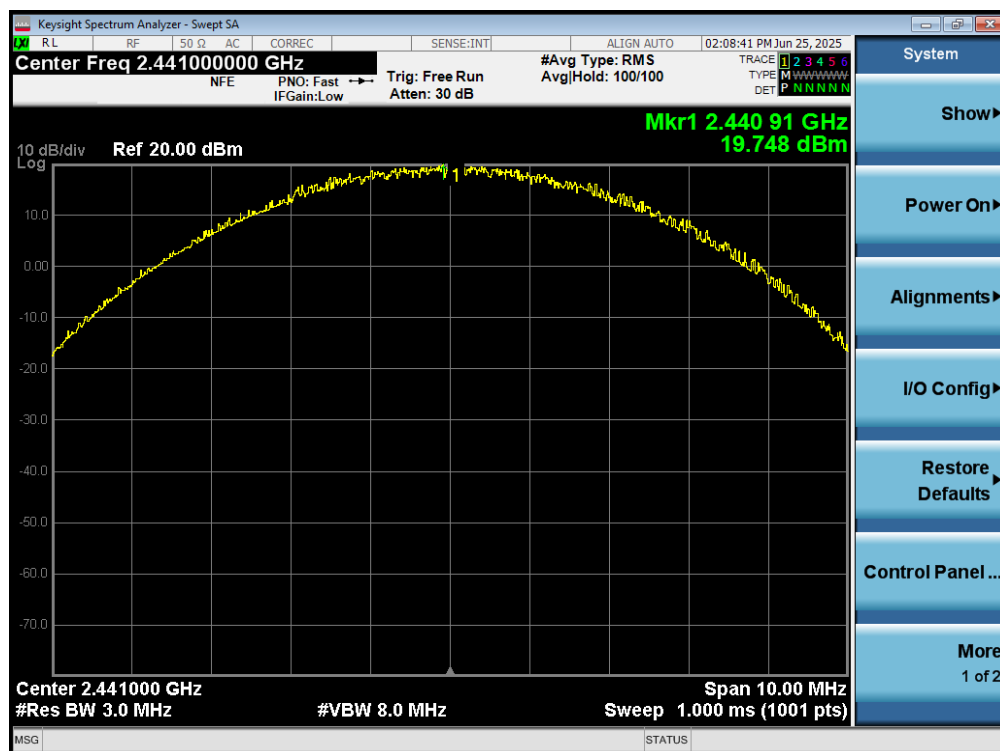


Plot 7-23. Peak Conducted Power (2Mbps – Ch. 39) – ANT1

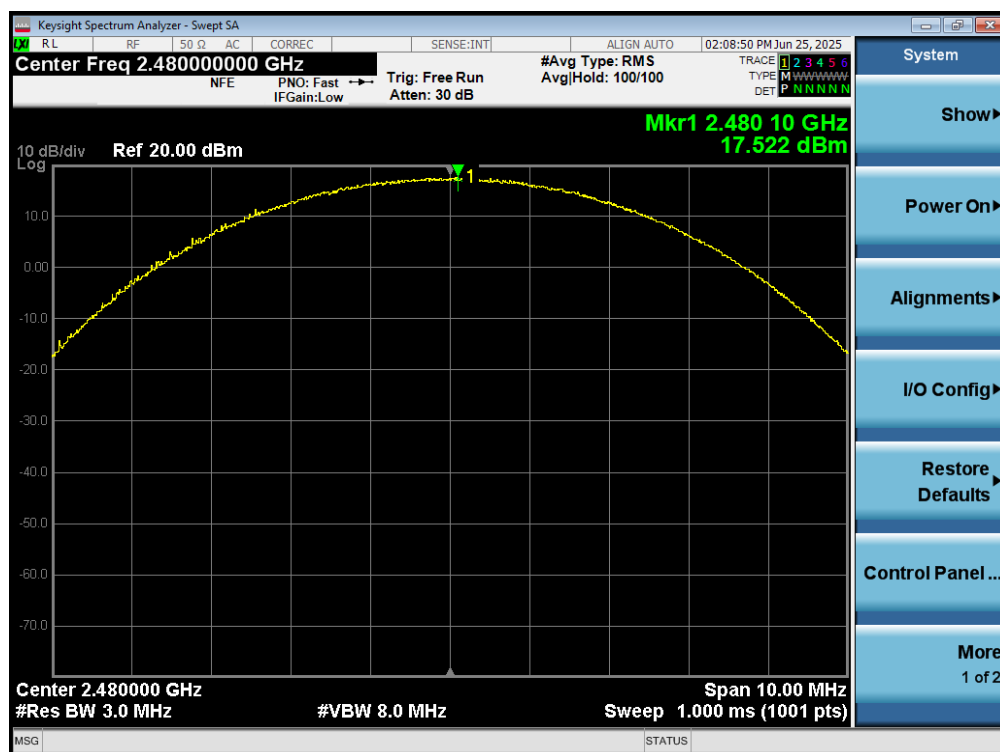


Plot 7-24. Peak Conducted Power (2Mbps – Ch. 78) – ANT1

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 28 of 89

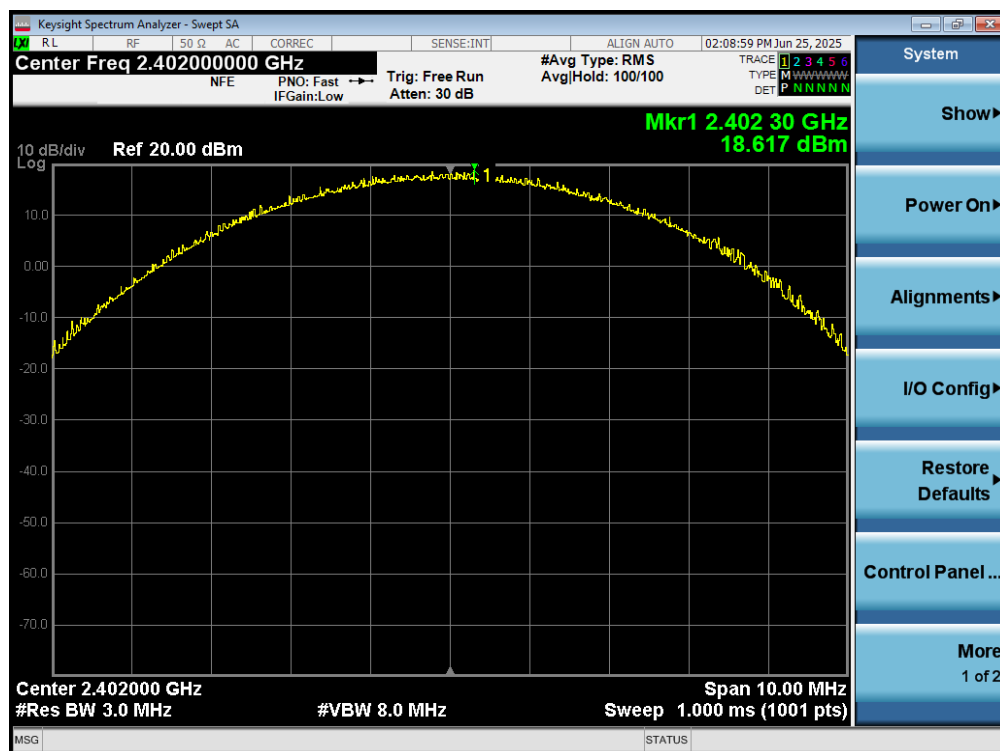


Plot 7-25. Peak Conducted Power (3Mbps – Ch. 0) – ANT1

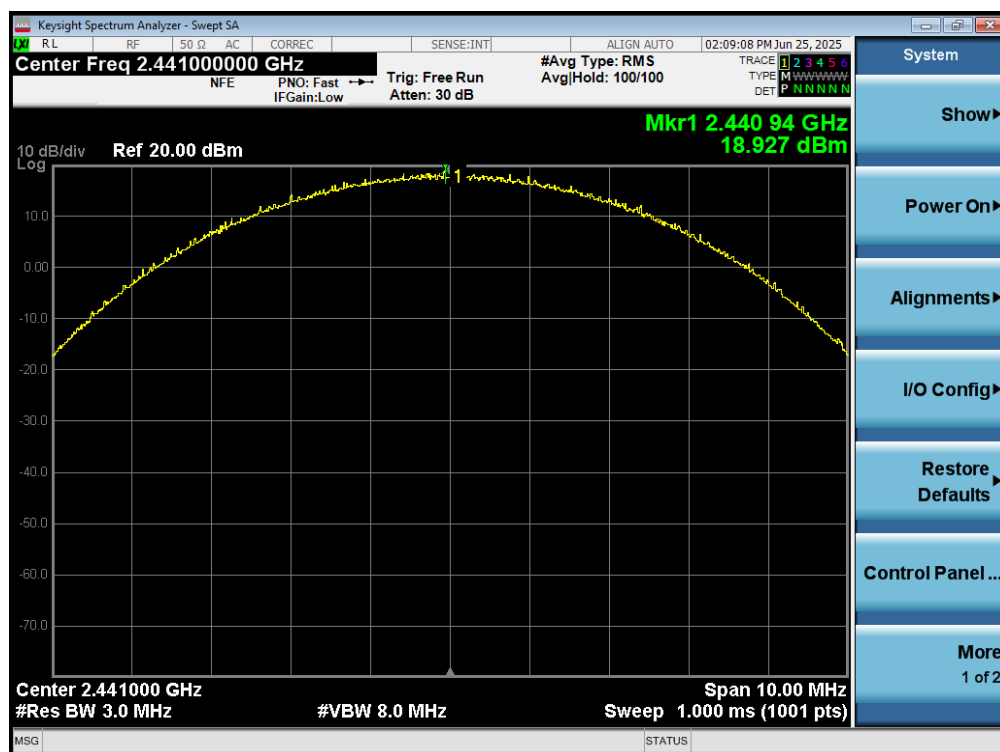


Plot 7-26. Peak Conducted Power (3Mbps – Ch. 39) – ANT1

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 29 of 89

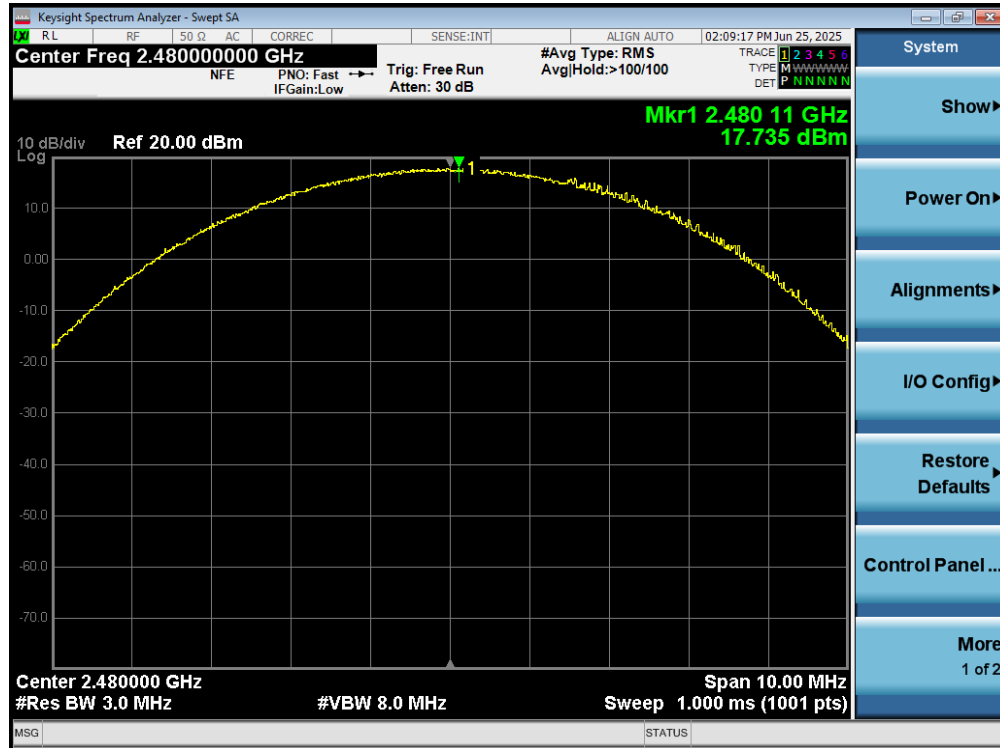


Plot 7-27. Peak Conducted Power (3Mbps – Ch. 78) – ANT1

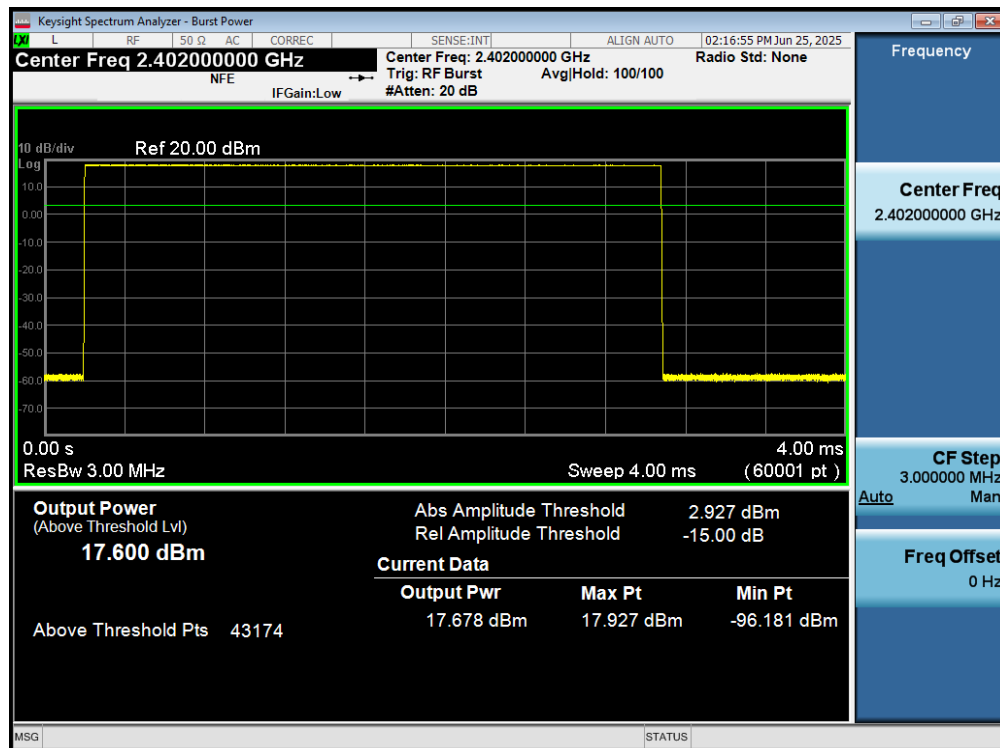


Plot 7-28. Average Conducted Power (1Mbps – Ch. 0) – ANT1

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 30 of 89

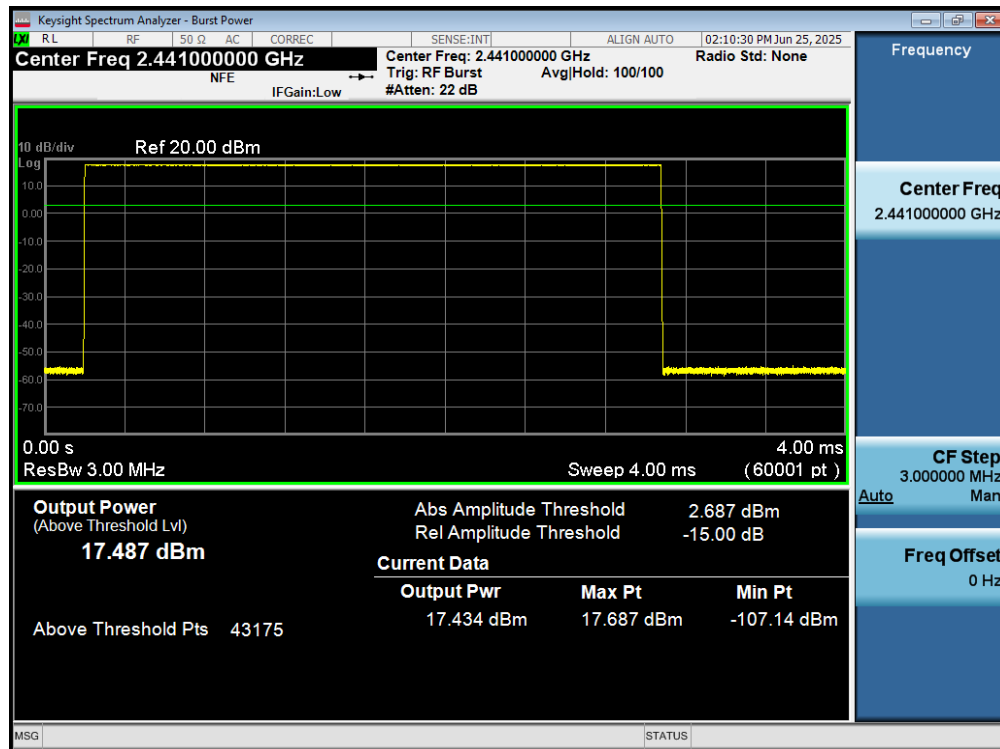


Plot 7-29. Average Conducted Power (1Mbps – Ch. 39) – ANT1

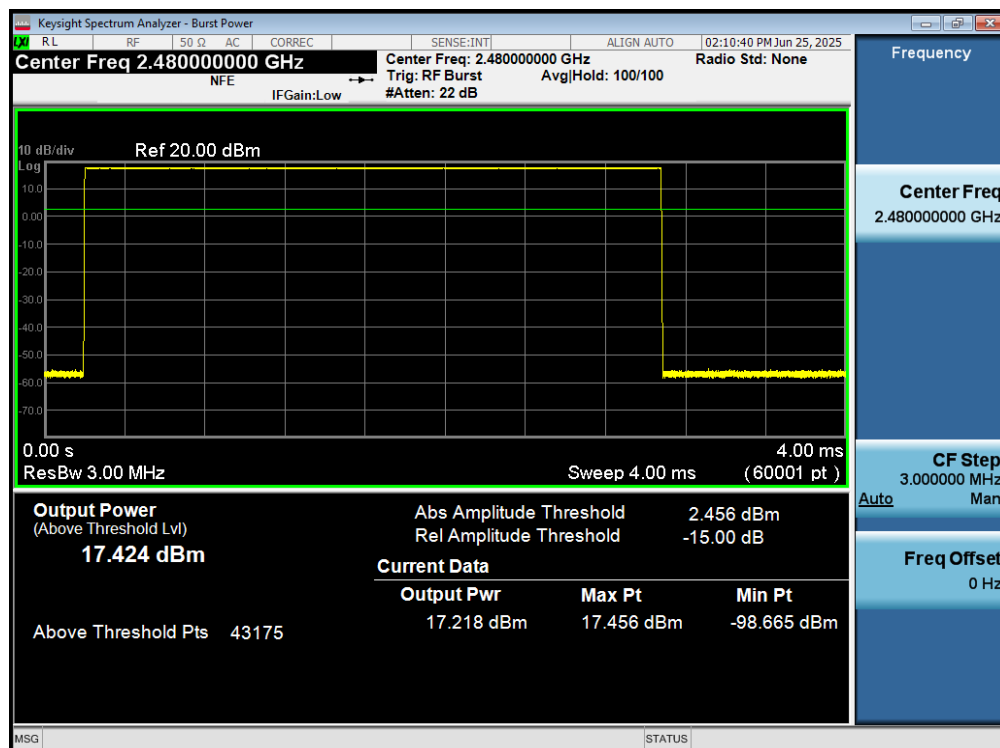


Plot 7-30. Average Conducted Power (1Mbps – Ch. 78) – ANT1

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 31 of 89

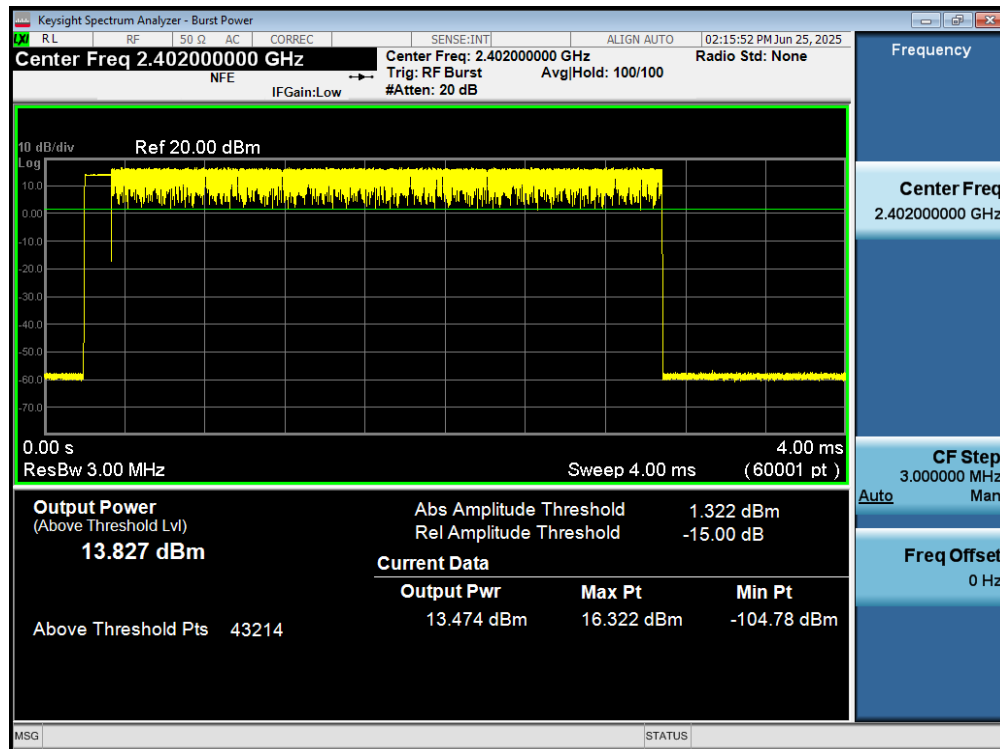


Plot 7-31. Average Conducted Power (2Mbps – Ch. 0) – ANT1

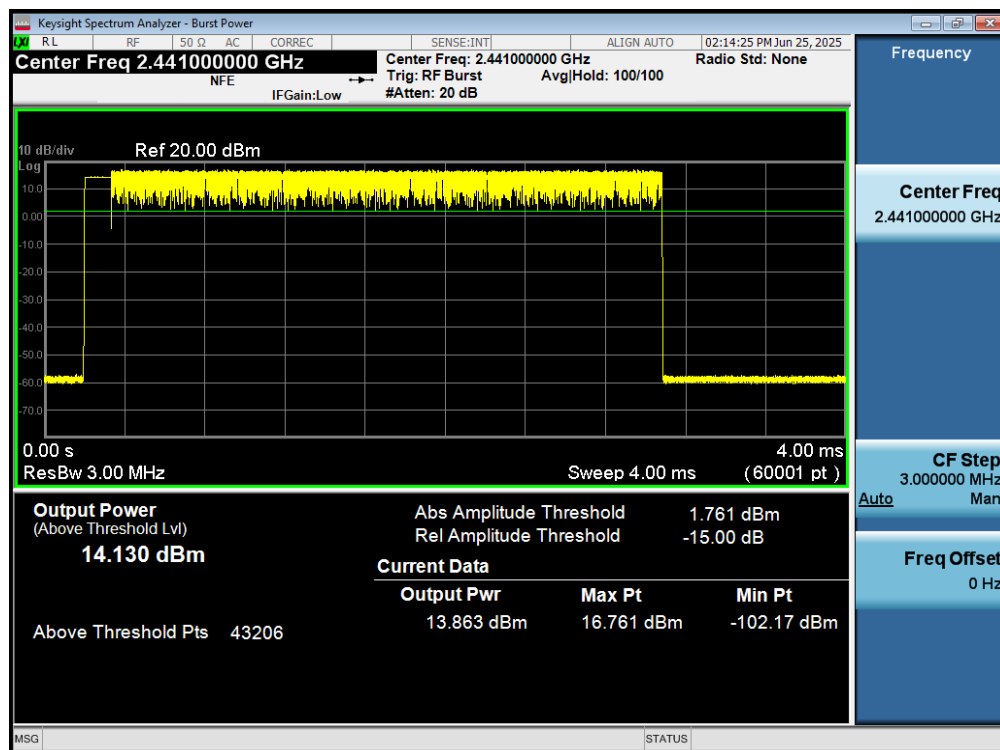


Plot 7-32. Average Conducted Power (2Mbps – Ch. 39) – ANT1

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 32 of 89

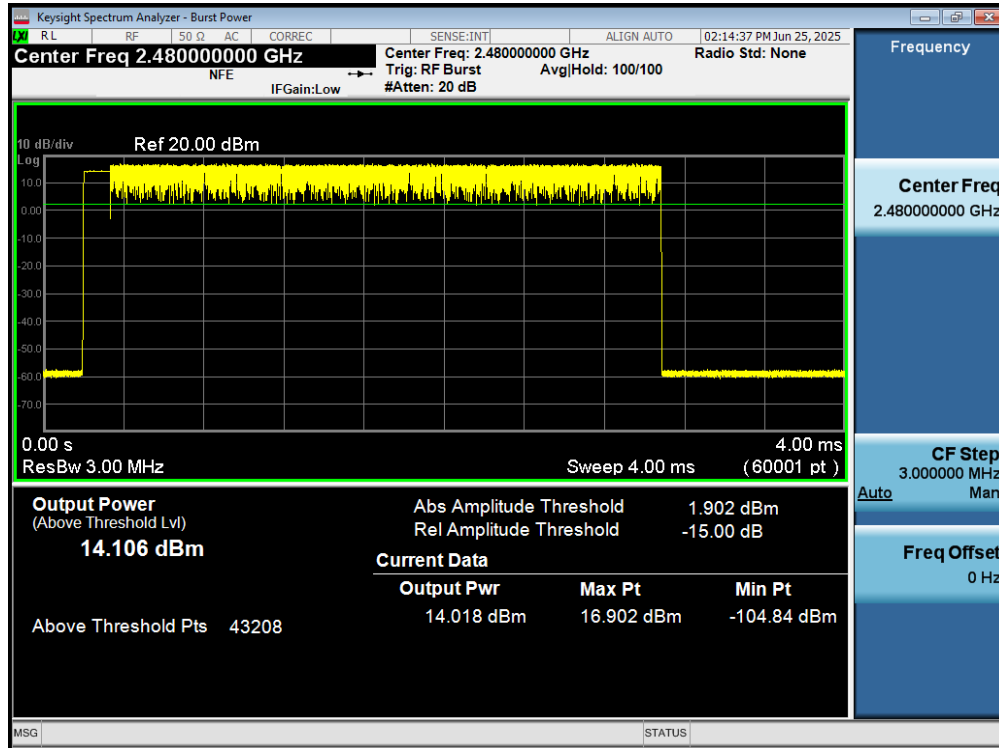


Plot 7-33. Average Conducted Power (2Mbps – Ch. 78) – ANT1

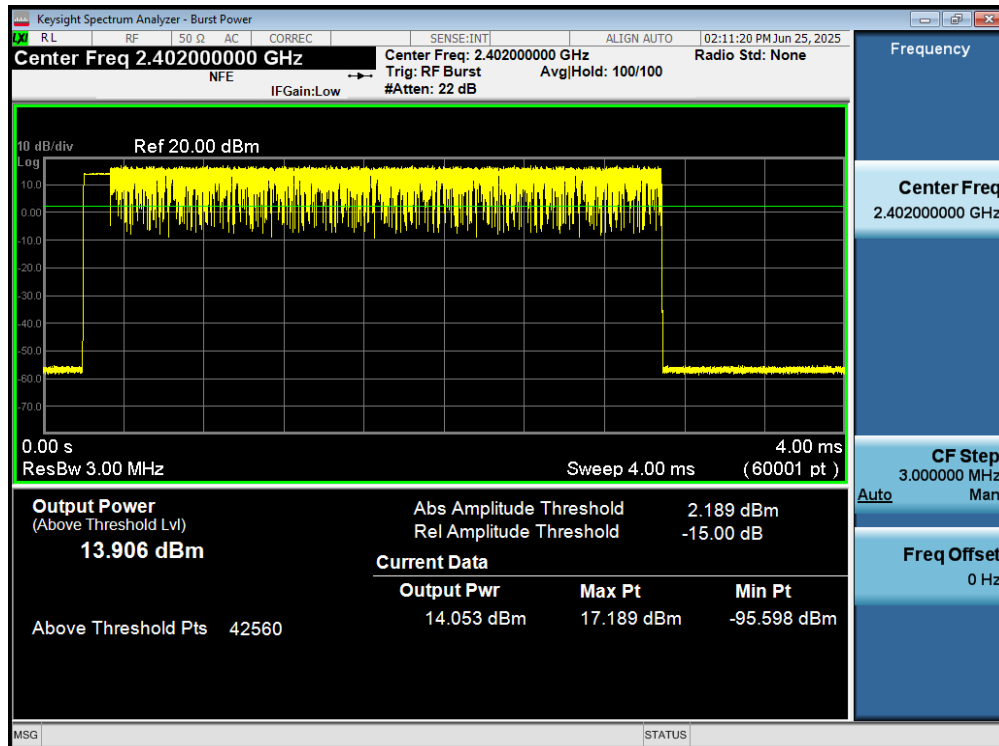


Plot 7-34. Average Conducted Power (3Mbps – Ch. 0) – ANT1

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 33 of 89

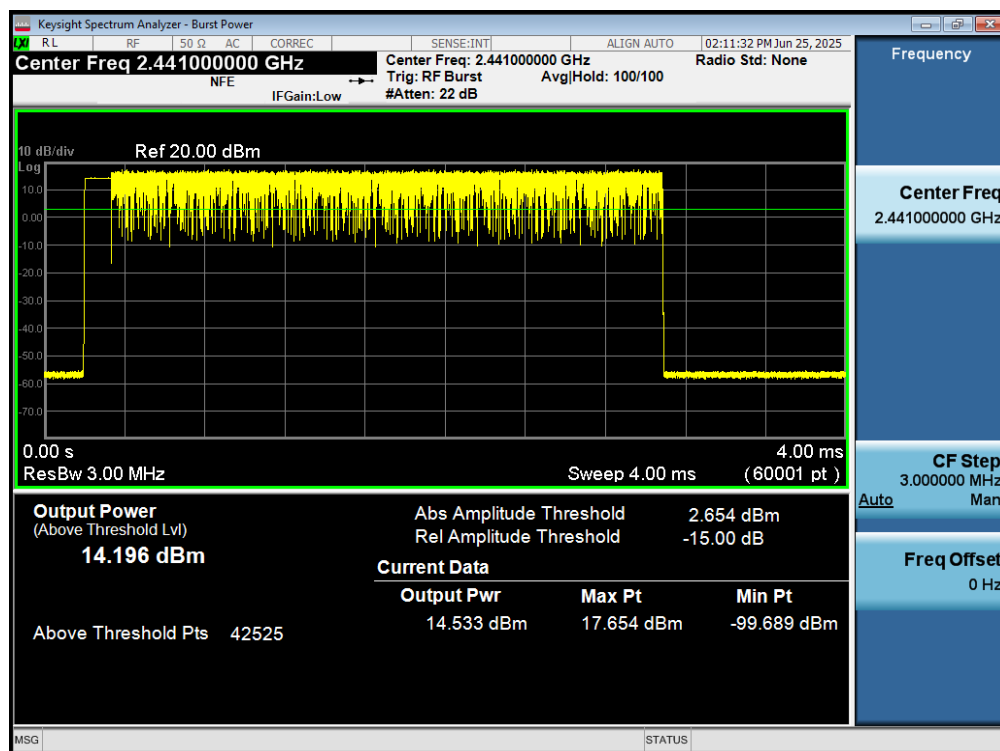

Plot 7-35. Average Conducted Power (3Mbps – Ch. 39) – ANT1

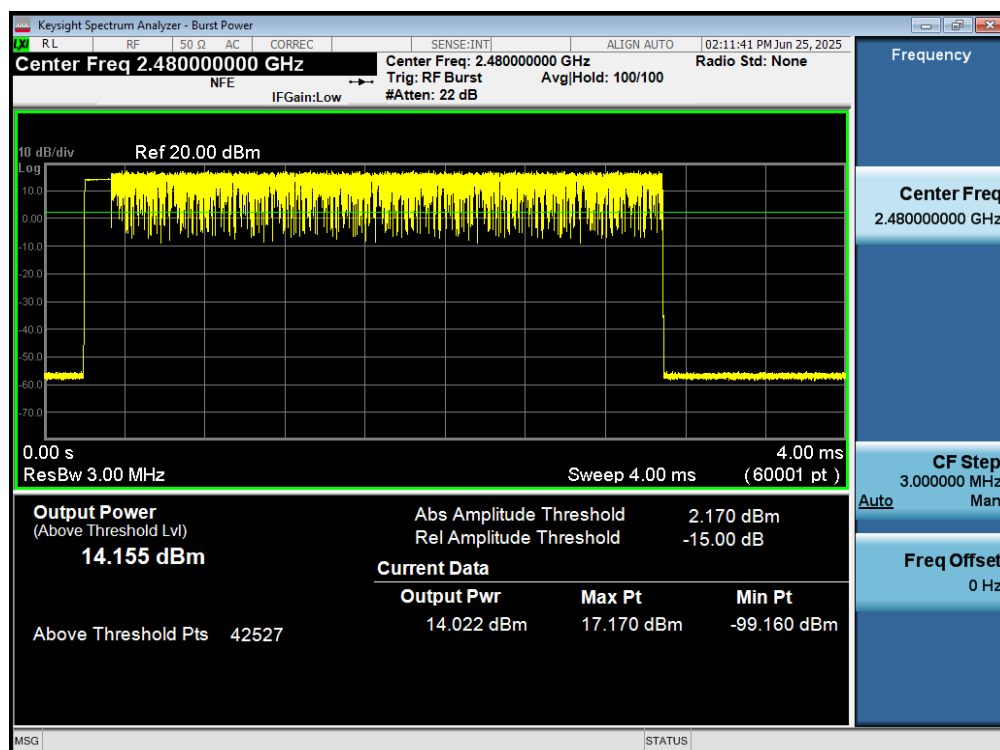


Plot 7-36. Average Conducted Power (3Mbps – Ch. 78) – ANT1

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 34 of 89


Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Peak Conducted Power		Avg Conducted Power	
					[dBm]	[mW]	[dBm]	[mW]
2402	1.0	GFSK	ePA	0	16.71	46.827	16.20	41.675
2441	1.0	GFSK	ePA	39	17.06	50.769	16.54	45.045
2480	1.0	GFSK	ePA	78	17.21	52.565	16.63	46.047
2402	2.0	$\pi/4$ -DQPSK	ePA	0	16.00	39.829	12.85	19.294
2441	2.0	$\pi/4$ -DQPSK	ePA	39	17.99	62.936	12.65	18.390
2480	2.0	$\pi/4$ -DQPSK	ePA	78	15.96	39.409	12.58	18.101
2402	3.0	8DPSK	ePA	0	18.12	64.863	12.91	19.530
2441	3.0	8DPSK	ePA	39	15.96	39.464	12.70	18.622
2480	3.0	8DPSK	ePA	78	16.23	41.957	12.74	18.807

Table 7-5. Conducted Output Power Measurements – ANT2

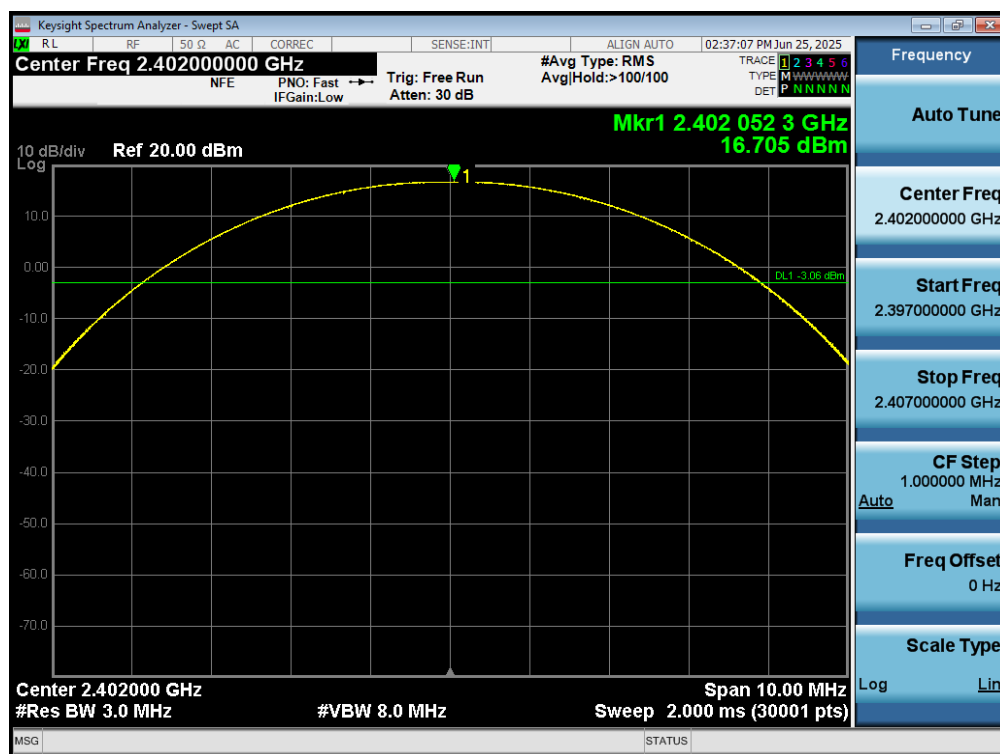


Plot 7-37. Peak Conducted Power (1Mbps – Ch. 0) – ANT2

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 35 of 89

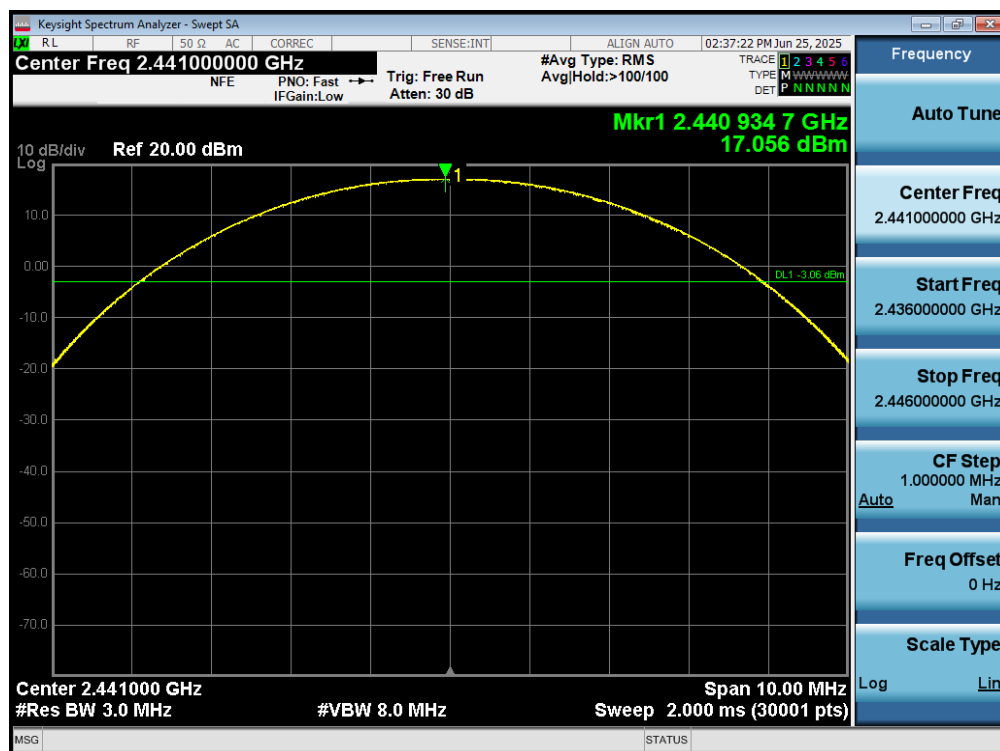


Plot 7-38. Peak Conducted Power (1Mbps – Ch. 39) – ANT2

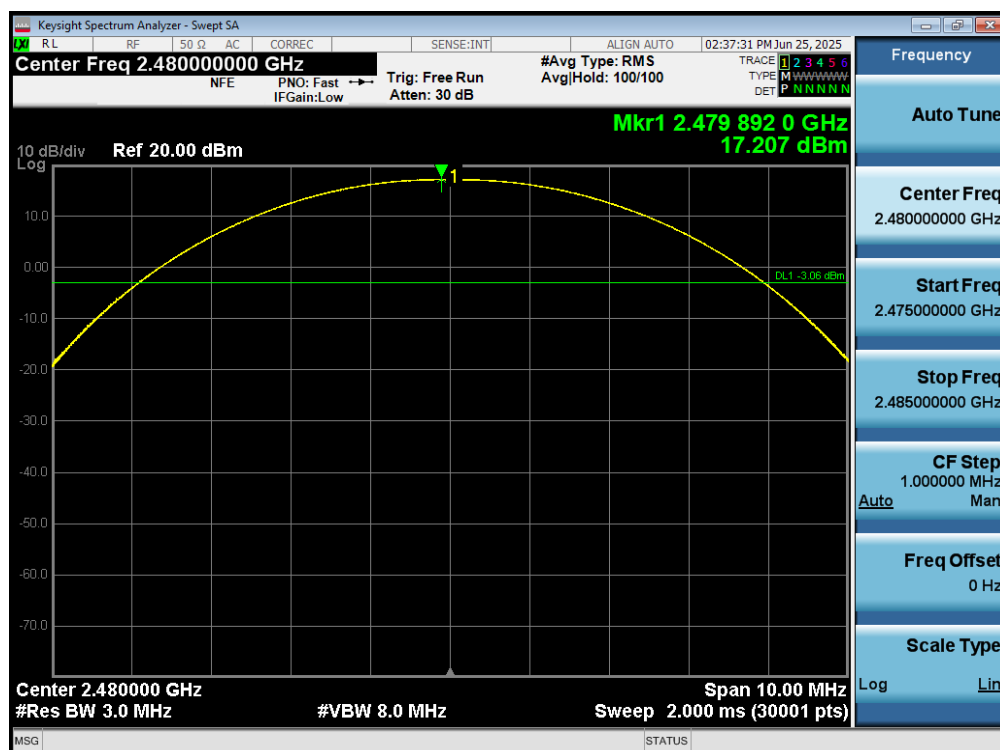


Plot 7-39. Peak Conducted Power (1Mbps – Ch. 78) – ANT2

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 36 of 89

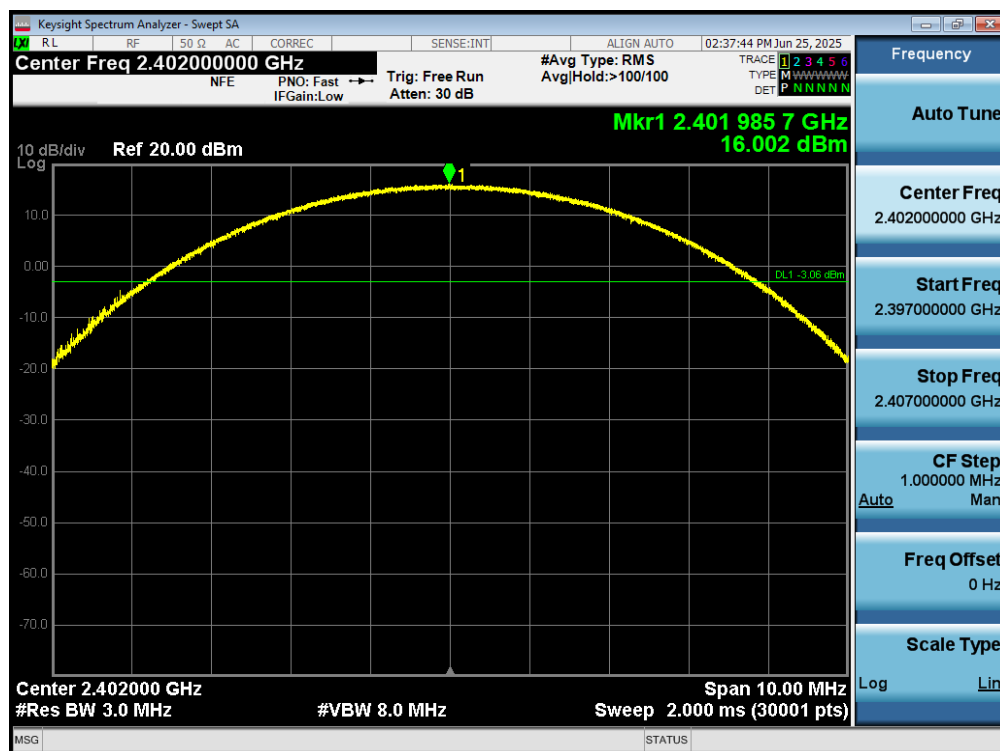


Plot 7-40. Peak Conducted Power (2Mbps – Ch. 0) – ANT2

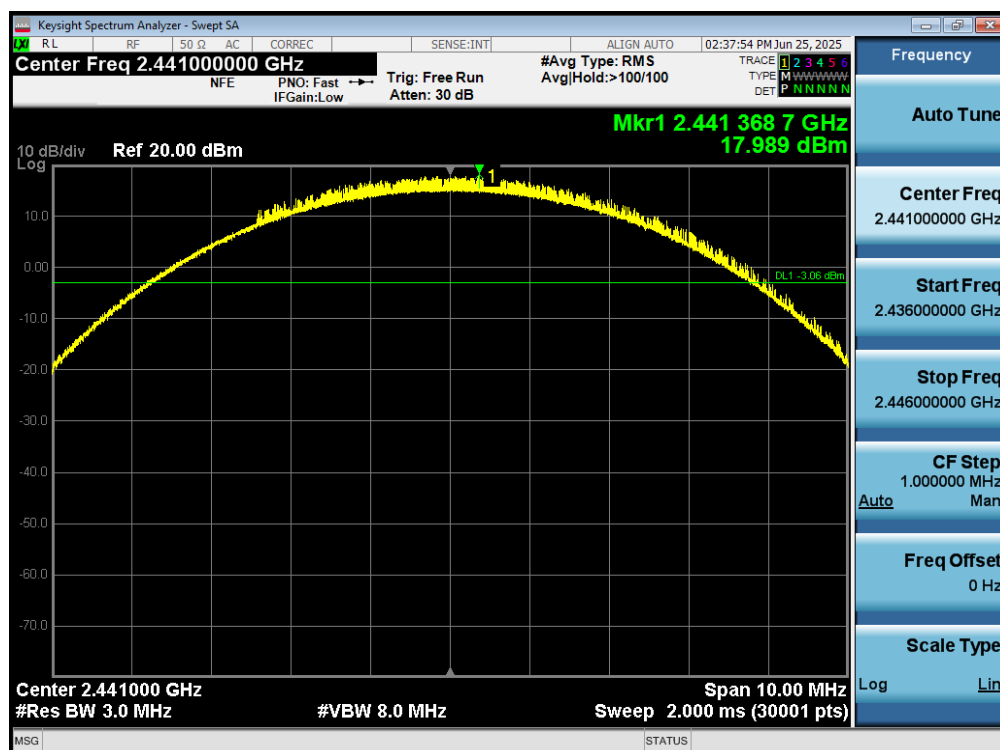


Plot 7-41. Peak Conducted Power (2Mbps – Ch. 39) – ANT2

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 37 of 89

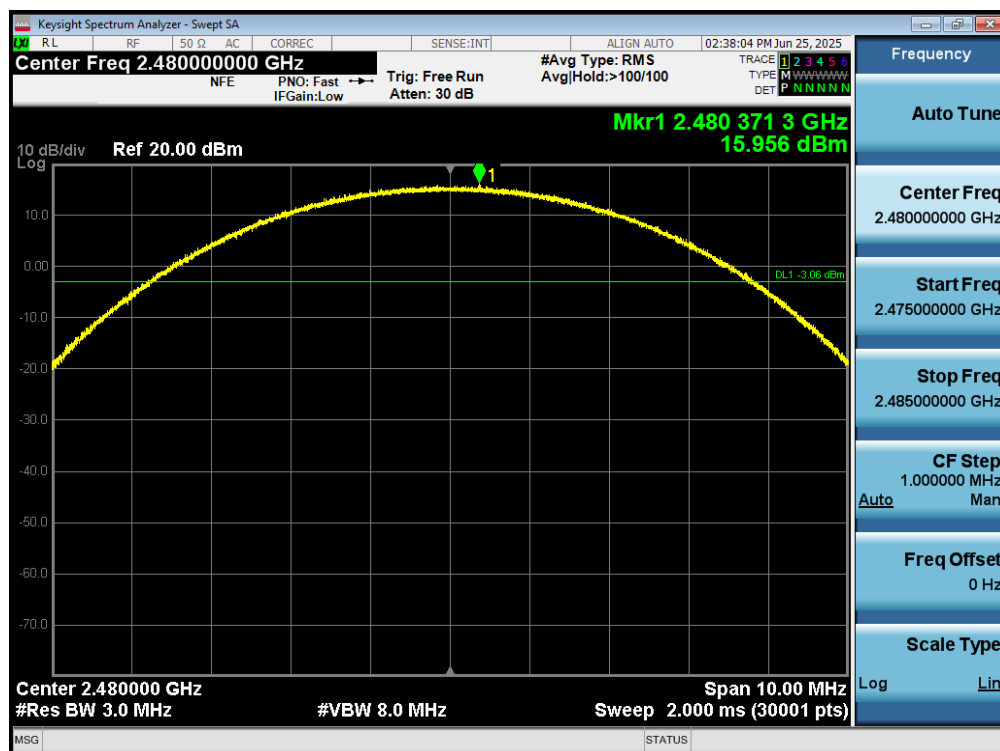


Plot 7-42. Peak Conducted Power (2Mbps – Ch. 78) – ANT2

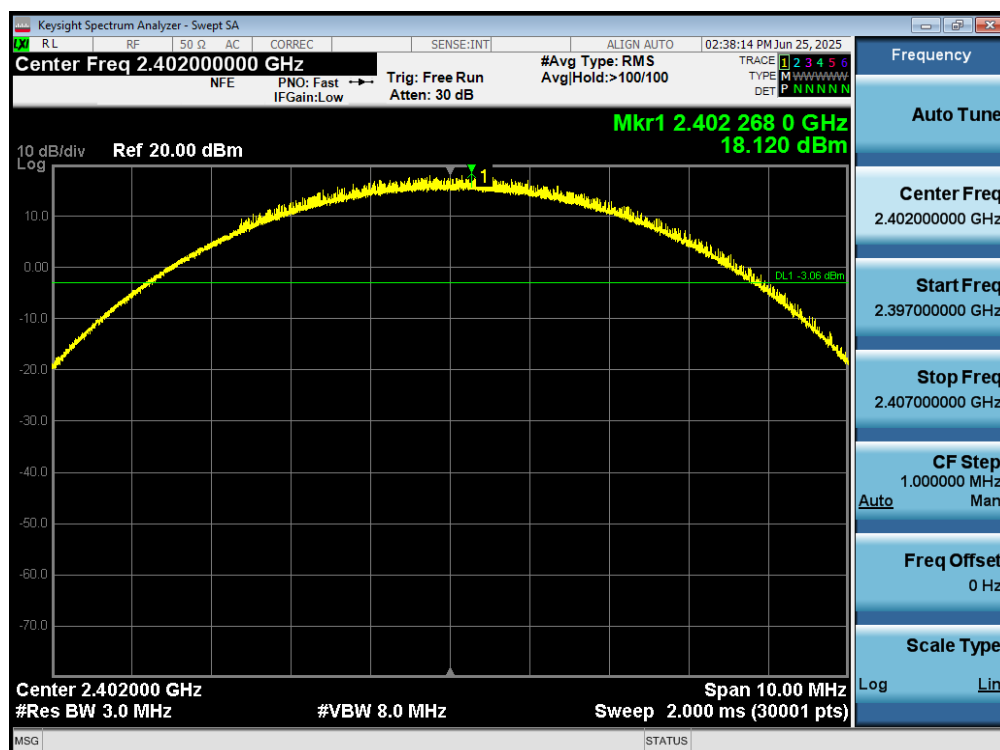


Plot 7-43. Peak Conducted Power (3Mbps – Ch. 0) – ANT2

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 38 of 89

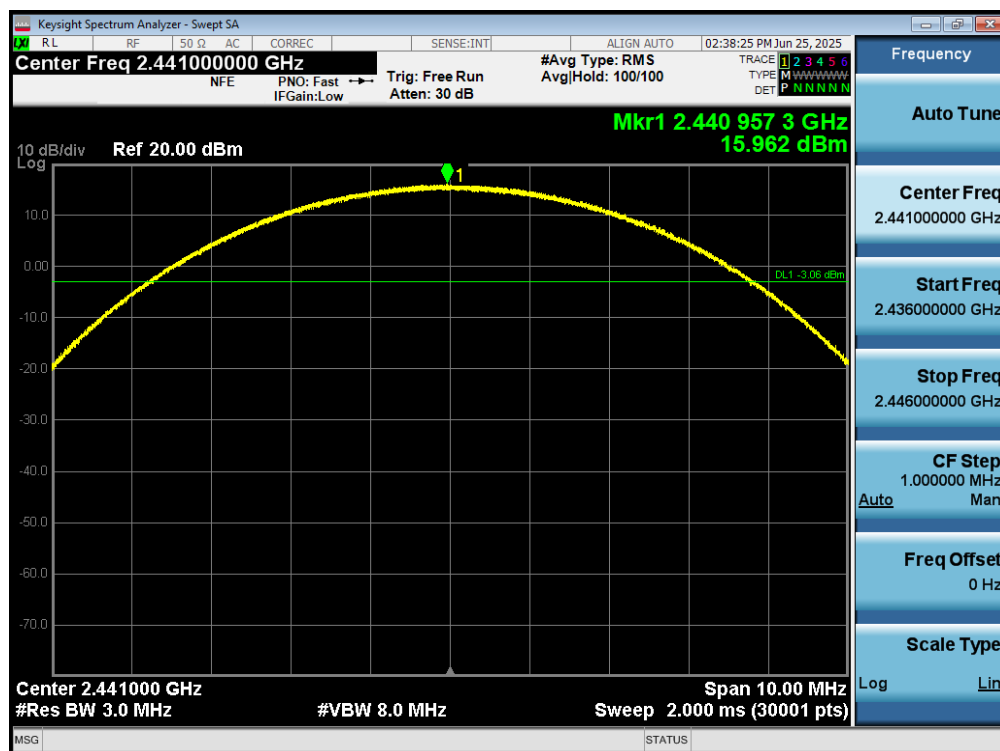


Plot 7-44. Peak Conducted Power (3Mbps – Ch. 39) – ANT2

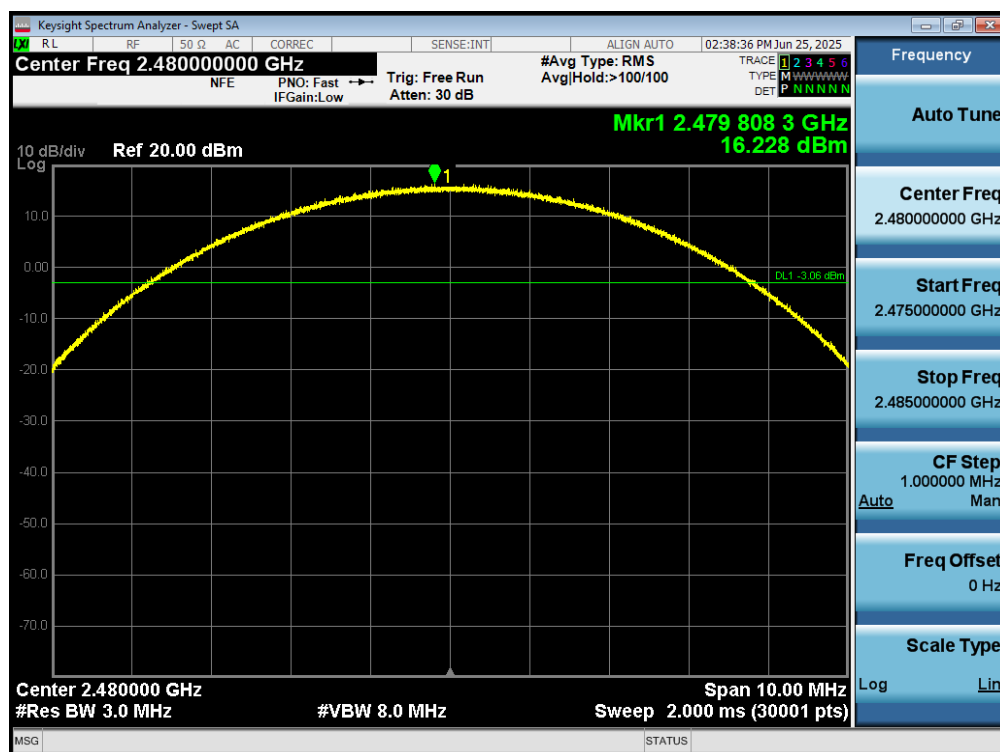


Plot 7-45. Peak Conducted Power (3Mbps – Ch. 78) – ANT2

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 39 of 89

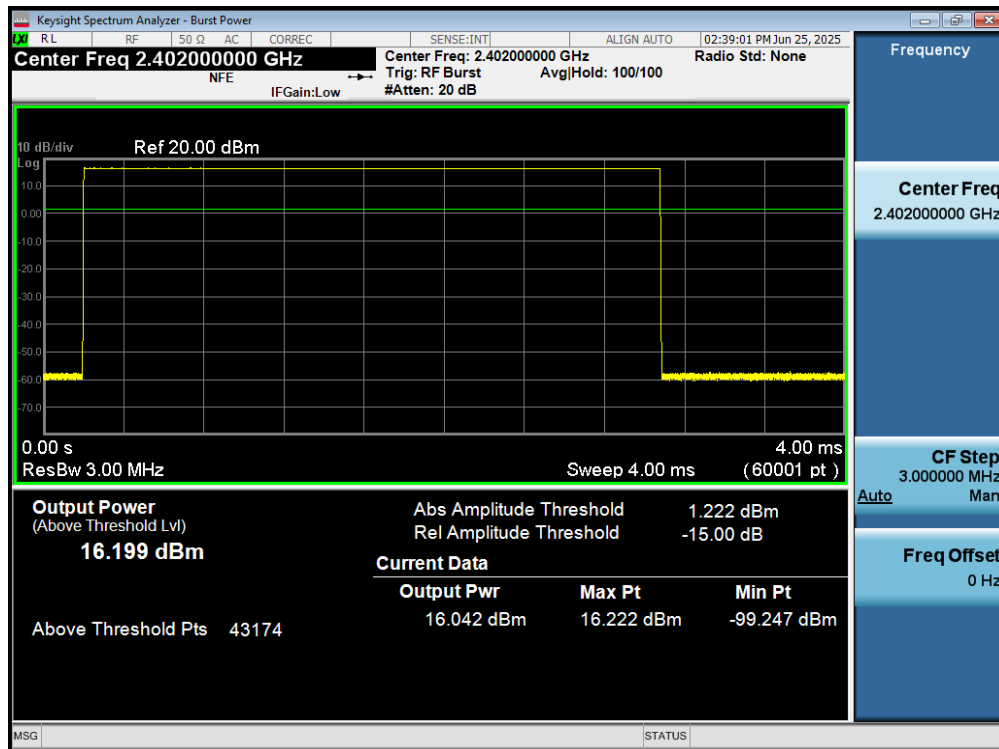


Plot 7-46. Average Conducted Power (1Mbps – Ch. 0) – ANT2

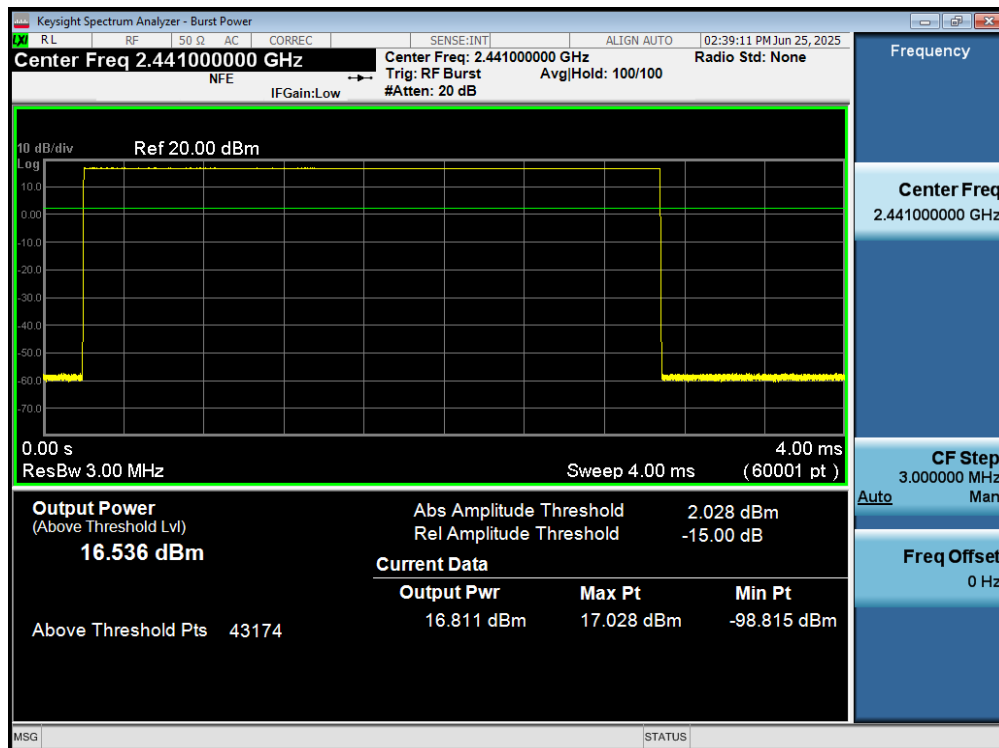


Plot 7-47. Average Conducted Power (1Mbps – Ch. 39) – ANT2

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 40 of 89

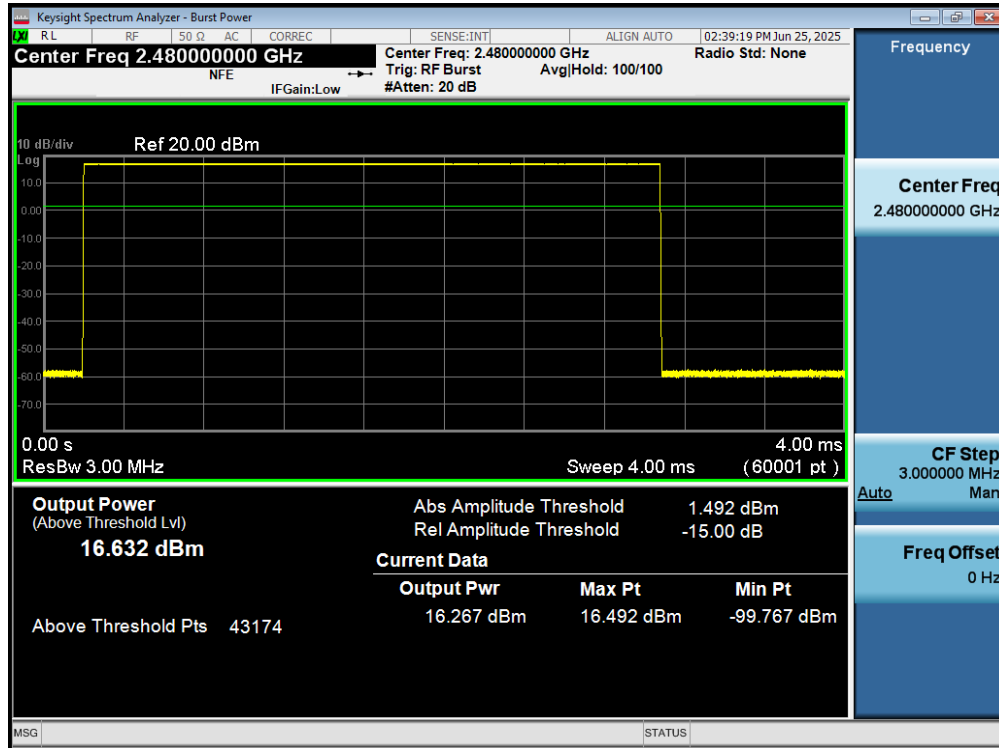


Plot 7-48. Average Conducted Power (1Mbps – Ch. 78) – ANT2

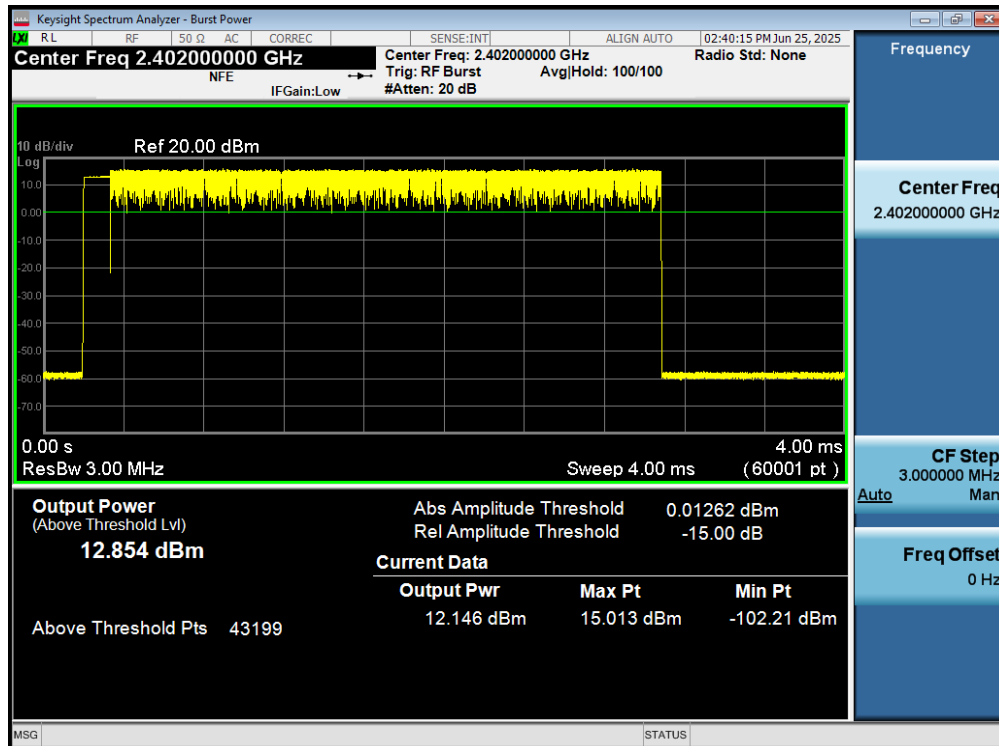


Plot 7-49. Average Conducted Power (2Mbps – Ch. 0) – ANT2

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 41 of 89

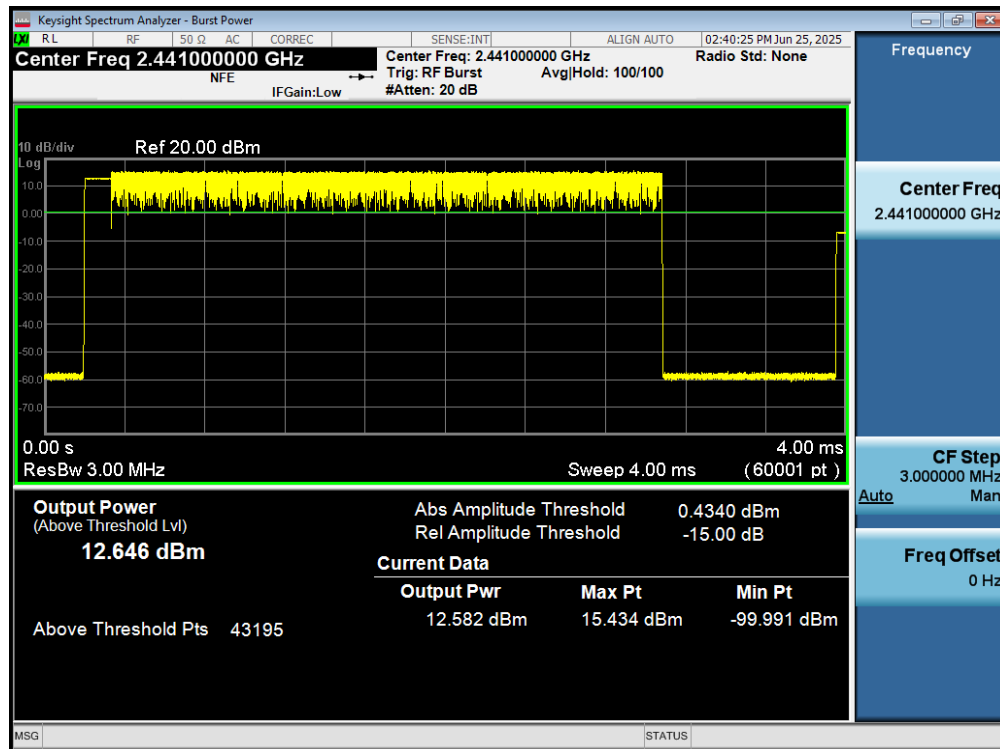


Plot 7-50. Average Conducted Power (2Mbps – Ch. 39) – ANT2

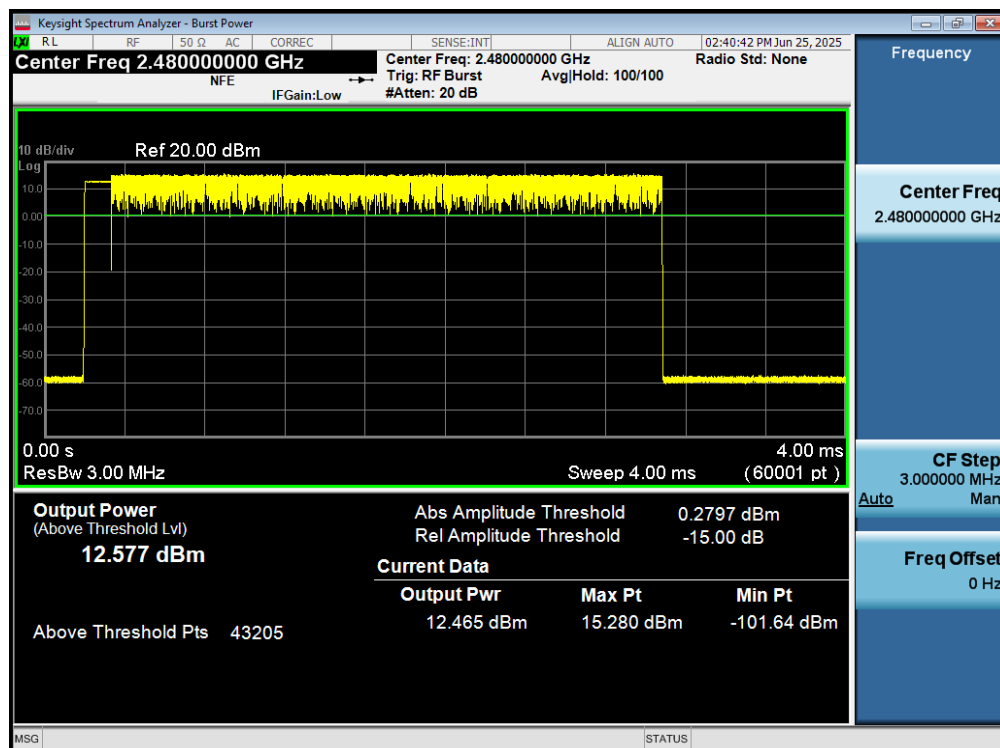


Plot 7-51. Average Conducted Power (2Mbps – Ch. 78) – ANT2

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 42 of 89

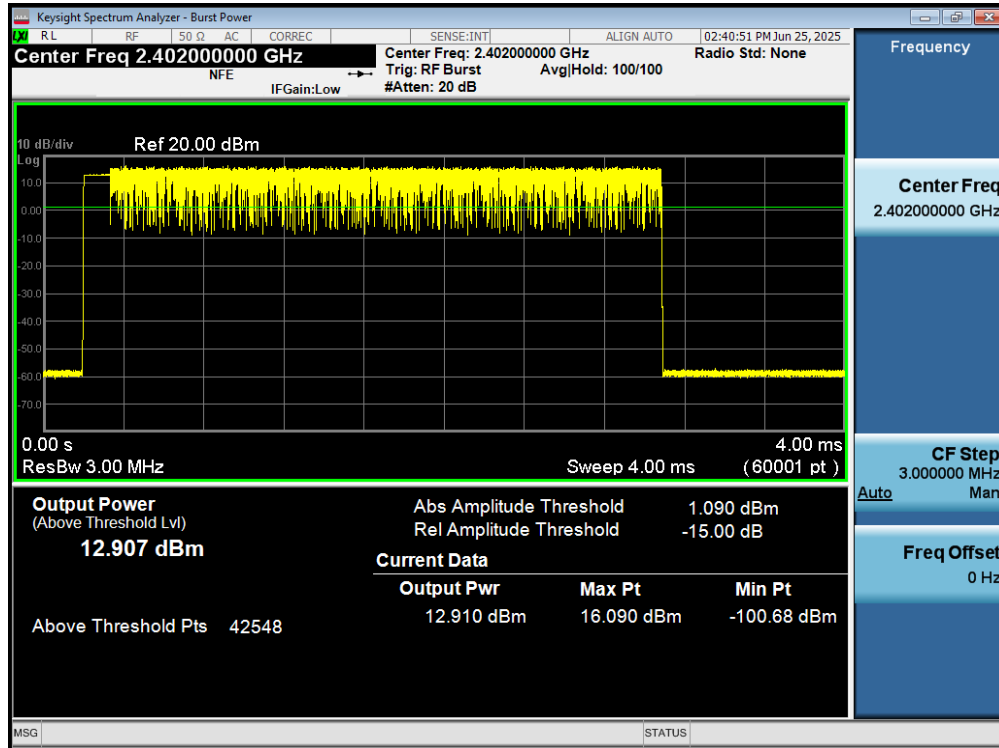


Plot 7-52. Average Conducted Power (3Mbps – Ch. 0) – ANT2

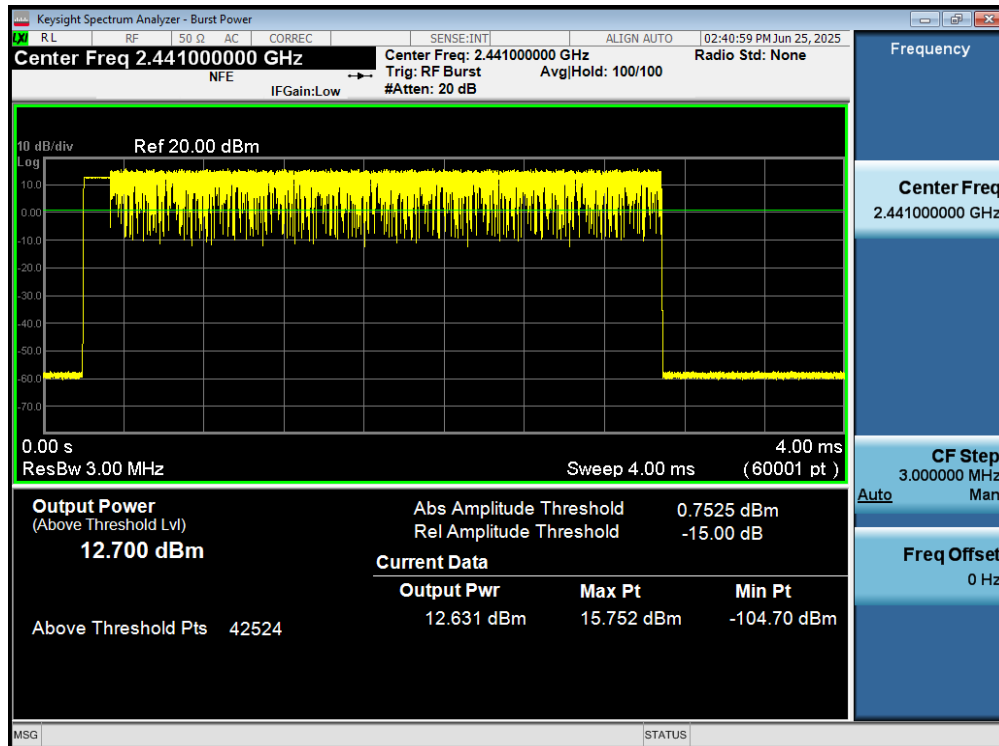

Plot 7-53. Average Conducted Power (3Mbps – Ch. 39) – ANT2

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 43 of 89

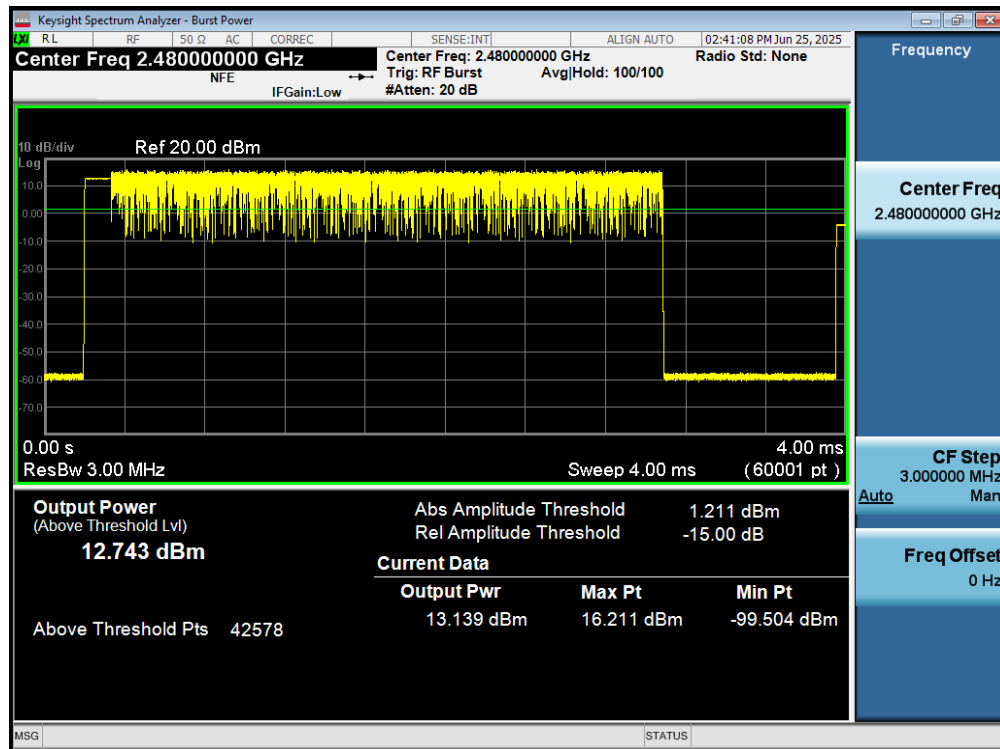

Plot 7-54. Average Conducted Power (3Mbps – Ch. 78) – ANT2

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 44 of 89

7.4 Band Edge Compliance

§15.247 (d); RSS-247 [5.5]

Test Overview and Limits

EUT operates in hopping and non-hopping transmission mode. Measurement is taken at the highest point located outside of the emission bandwidth. **The maximum permissible out-of-band emission level is 20 dBc.**

Test Procedure Used

ANSI C63.10:2020 – Section 6.10.4

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 300kHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-3. Test Instrument & Measurement Setup

Test Notes


Out of band conducted spurious emissions at the band edge were investigated for all data rates in hopping and non-hopping modes. The worst case emissions were found with the EUT transmitting at 3 Mbps. Band edge emissions were also investigated with the EUT transmitting in all data rates. Plots of the worst case emissions are shown below.

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 45 of 89

ANTENNA 1

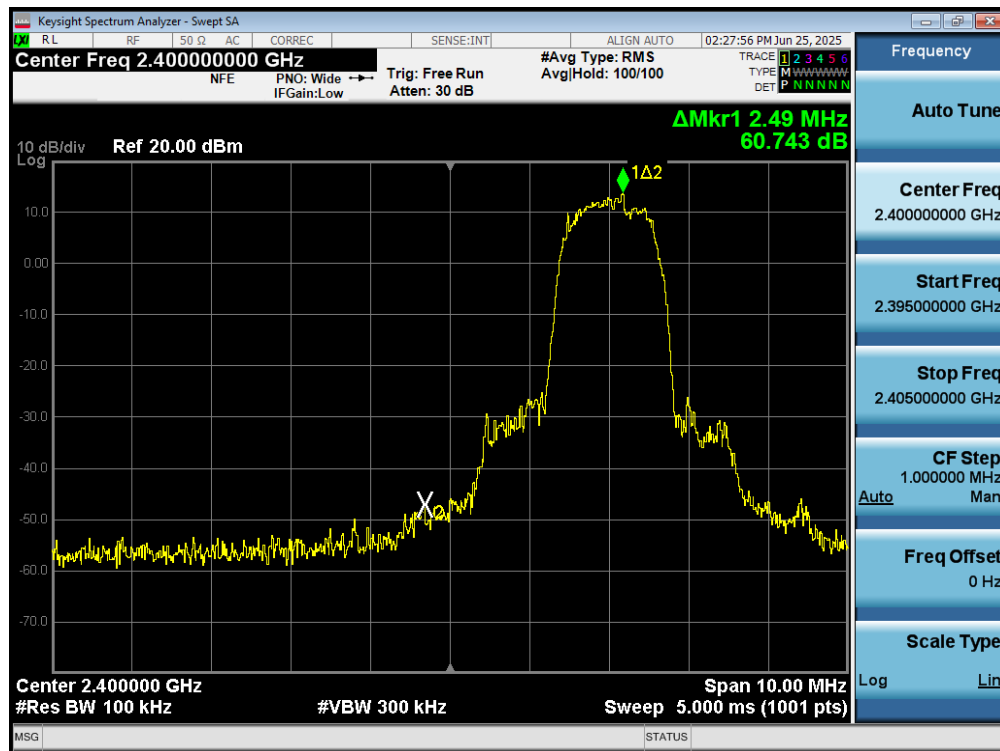


Plot 7-55. Band Edge Plot (Bluetooth with Hopping Disabled, 3 Mbps – Ch. 0) – ANT1

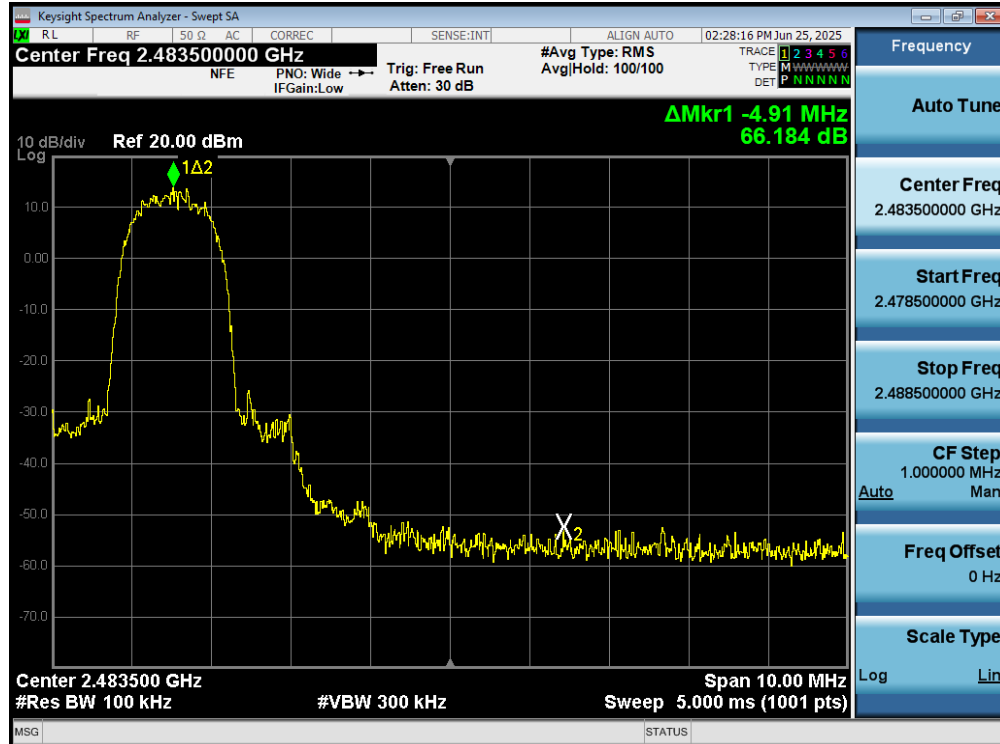


Plot 7-56. Band Edge Plot (Bluetooth with Hopping Disabled, 3 Mbps – Ch. 78) – ANT1

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 46 of 89

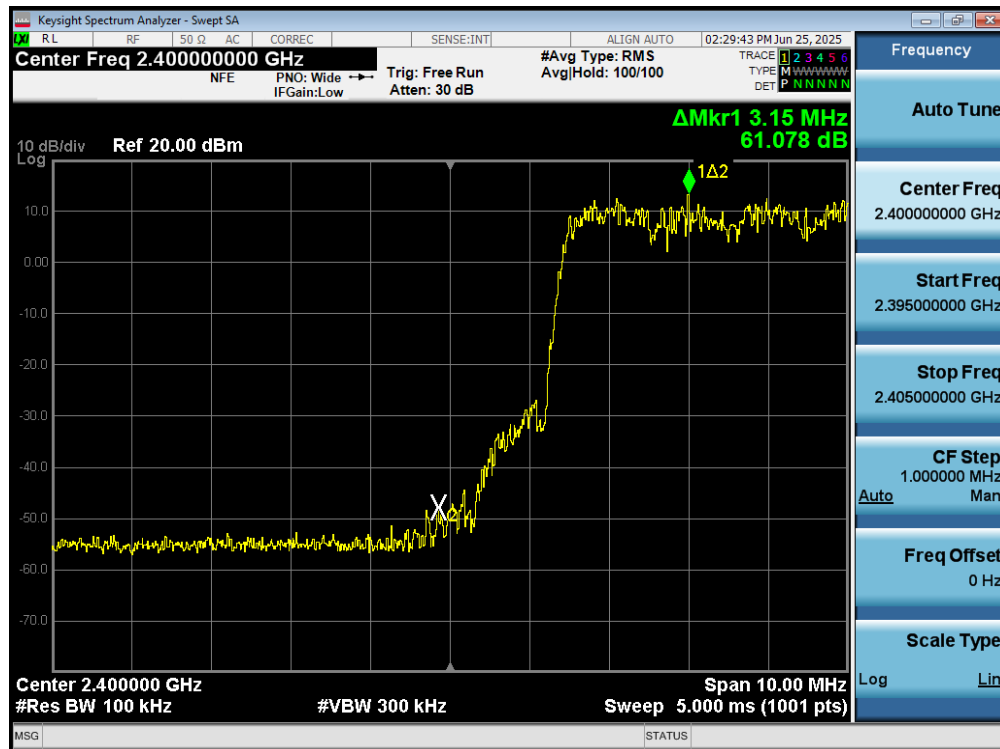

Plot 7-57. Band Edge Plot (Bluetooth with Hopping Enabled, 3 Mbps) – ANT1

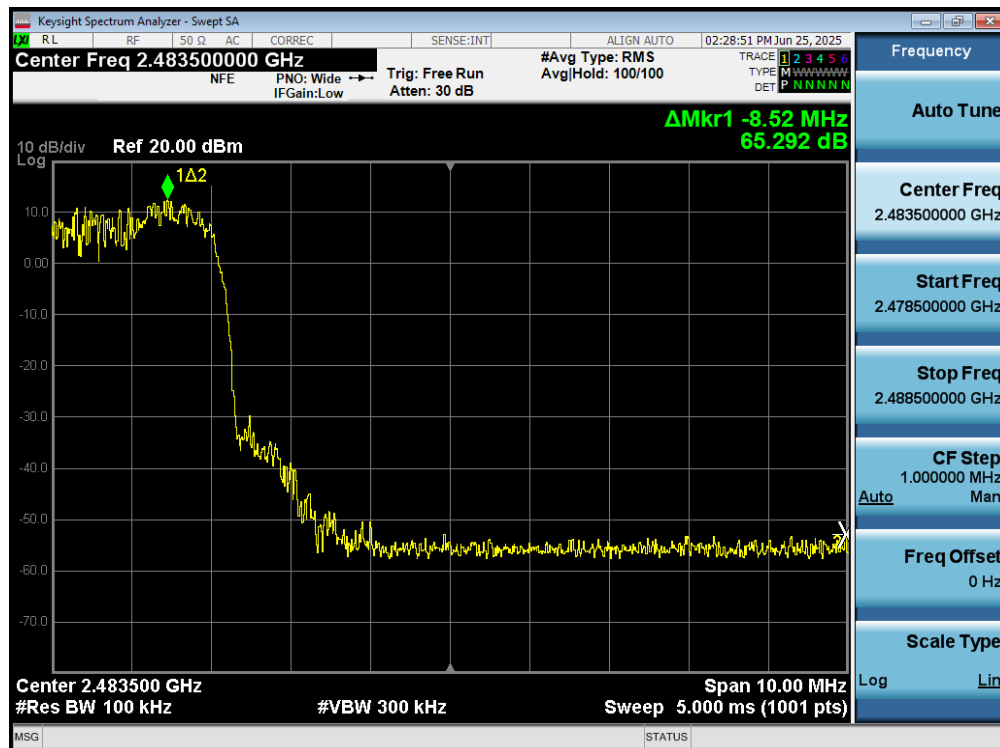

Plot 7-58. Band Edge Plot (Bluetooth with Hopping Enabled, 3 Mbps) – ANT1

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 47 of 89

ANTENNA 2



Plot 7-59. Band Edge Plot (Bluetooth with Hopping Disabled, 3 Mbps – Ch. 0) – ANT2



Plot 7-60. Band Edge Plot (Bluetooth with Hopping Disabled, 3 Mbps – Ch. 78) – ANT2

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 48 of 89



Plot 7-61. Band Edge Plot (Bluetooth with Hopping Enabled, 3 Mbps) – ANT2



Plot 7-62. Band Edge Plot (Bluetooth with Hopping Enabled, 3 Mbps) – ANT2

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 49 of 89

7.5 Carrier Frequency Separation

§15.247 (a.1); RSS-247 [5.1(2)]

Test Overview and Limit

Measurement is made with EUT operating in hopping mode. ***The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.***

Test Procedure Used

ANSI C63.10:2020 – Section 7.8.2

Test Settings

1. Span = Wide enough to capture peaks of two adjacent channels
2. RBW = 30% of channel spacing. Adjust as necessary to best identify center of each individual channel
3. VBW $\geq$ RBW
4. Sweep = Auto
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize.
8. Marker-delta function used to determine separation between peaks of the adjacent channels

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes

The EUT complies with the minimum channel separation requirement when it is operating in 1x/EDR mode using 79 channels and when operating in AFH mode using 20 channels.

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 50 of 89


Frequency [MHz]	Data Rate [Mbps]	Mod.	Channel No.	Min. Channel Separation [MHz]
2402	1.0	GFSK	0	0.887
2441	1.0	GFSK	39	0.634
2480	1.0	GFSK	78	0.675
2402	2.0	$\pi/4$ -DQPSK	0	0.865
2441	2.0	$\pi/4$ -DQPSK	39	0.886
2480	2.0	$\pi/4$ -DQPSK	78	0.874
2402	3.0	8DPSK	0	0.878
2441	3.0	8DPSK	39	0.861
2480	3.0	8DPSK	78	0.872

Table 7-6. Minimum Channel Separation – Ant 1


Frequency [MHz]	Data Rate [Mbps]	Mod.	Channel No.	Min. Channel Separation [MHz]
2402	1.0	GFSK	0	0.629
2441	1.0	GFSK	39	0.624
2480	1.0	GFSK	78	0.680
2402	2.0	$\pi/4$ -DQPSK	0	0.886
2441	2.0	$\pi/4$ -DQPSK	39	0.833
2480	2.0	$\pi/4$ -DQPSK	78	0.855
2402	3.0	8DPSK	0	0.885
2441	3.0	8DPSK	39	0.856
2480	3.0	8DPSK	78	0.835

Table 7-7. Minimum Channel Separation – Ant 2

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 51 of 89

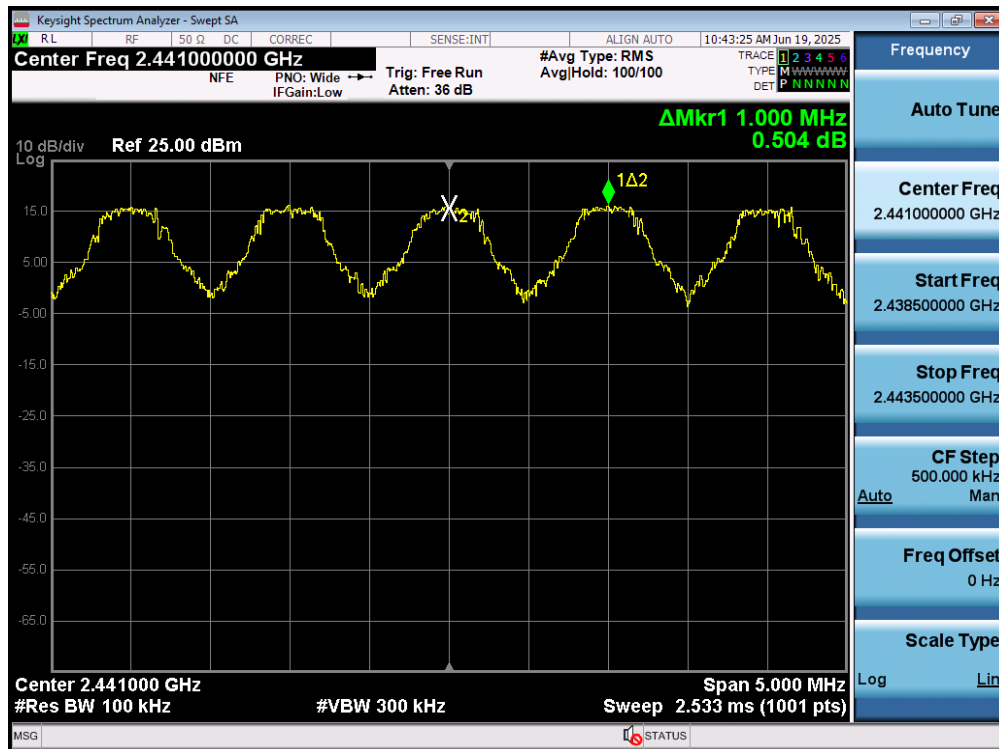

Plot 7-63. Channel Spacing Plot (Bluetooth) – Ant 1

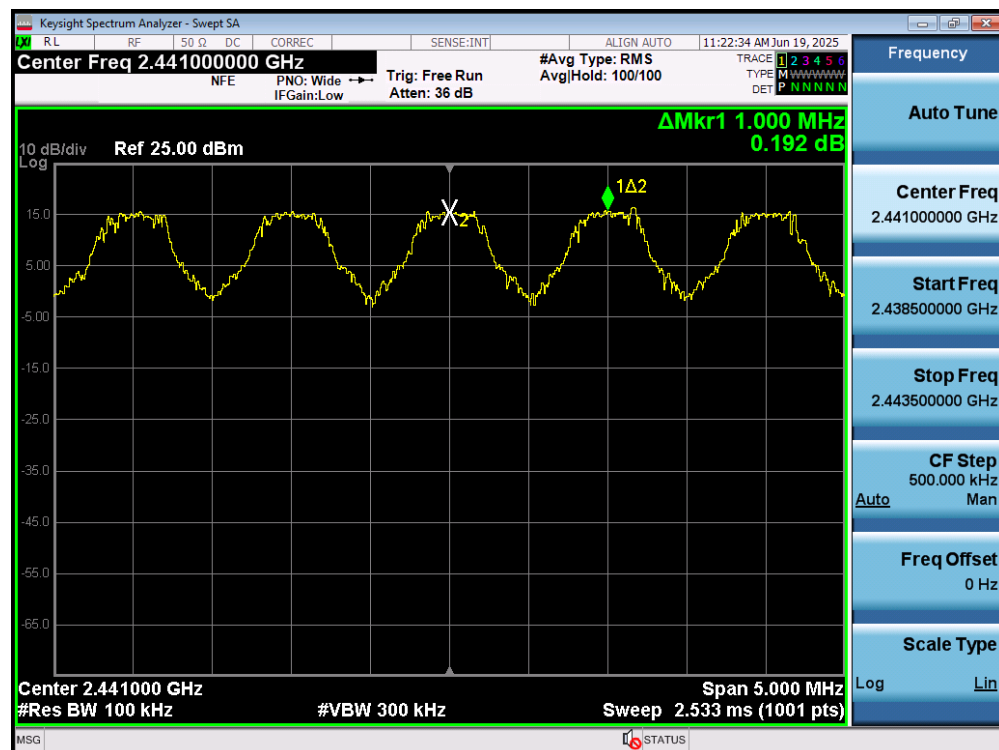

Plot 7-64. Channel Spacing Plot (Bluetooth) – Ant 2

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 52 of 89

7.6 Time of Occupancy

§15.247 (a.1.iii); RSS-247 [5.1(4)]

Test Overview and Limit

Measurement is made while EUT is operating in hopping mode with the spectrum analyzer set to zero span. ***The maximum permissible time of occupancy is 400 ms within a period of 400ms multiplied by the number of hopping channels employed.***

Test Procedure Used

ANSI C63.10:2020 – Section 7.8.4

Test Settings

1. Span = zero span, centered on a hopping channel
2. RBW $\leq$ channel spacing and $\gg 1/T$, where T is expected dwell time per channel
3. Sweep = as necessary to capture entire dwell time. Second plot may be required to demonstrate two successive hops on a channel
4. Trigger is set with appropriate trigger delay to place pulse near the center of the plot
5. Detector = peak
6. Trace mode = max hold
7. Marker-delta function used to determine transmit time per hop

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

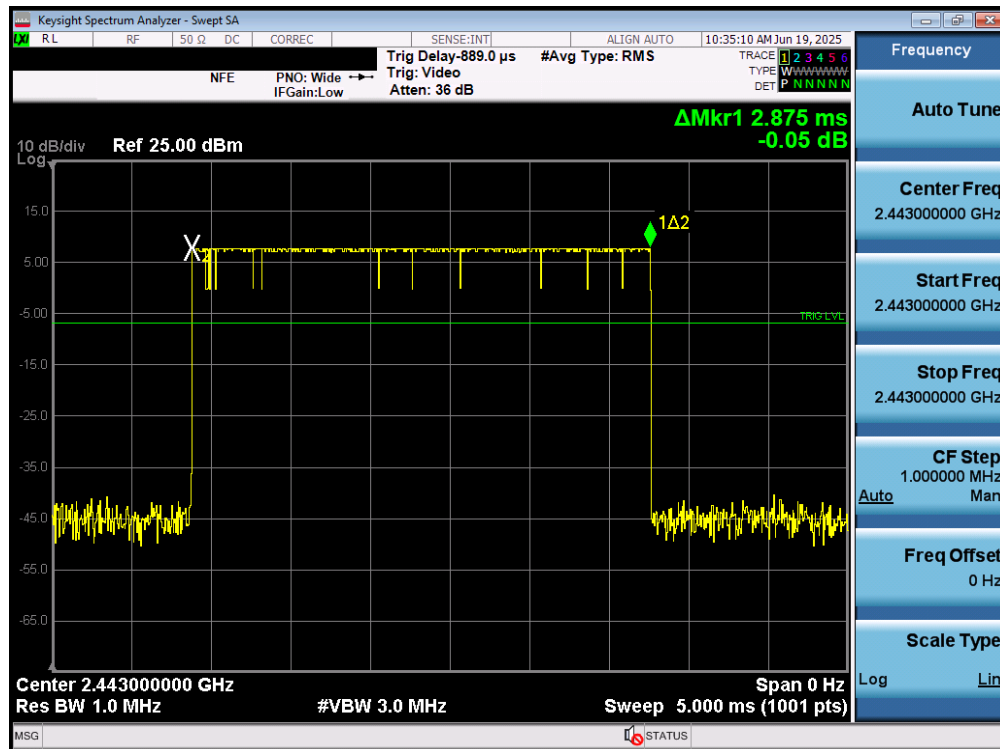


Figure 7-5. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 53 of 89



Plot 7-65. Time of Occupancy Plot (Bluetooth) – ANT 1

Bluetooth Time of Occupancy Calculation


Typically, Bluetooth 1x/EDR mode has a channel hopping rate of 1600 hops/s. Since 1x/EDR modes use 5 transmit and 1 receive slot, for a total of 6 slots, the Bluetooth transmitter is actually hopping at a rate of $1600 / 6 = 266.67$ hops/s/slot

- $400\text{ms} \times 79$ hopping channels = 31.6 sec (Time of Occupancy Limit)
- Worst case BT has 266.67 hops/second (for 1x/EDR modes with DH5 operation)
- $266.67 \text{ hops/second} / 79 \text{ channels} = 3.38 \text{ hops/second}$ (# of hops/second on one channel)
- $3.38 \text{ hops/second/channel} \times 31.6 \text{ seconds} = 106.67 \text{ hops}$ (# hops over a 31.6 second period)
- $106.67 \text{ hops} \times 2.875 \text{ ms/channel} = 306.68 \text{ ms}$ (worst case dwell time for one channel in 1x/EDR modes)

With AFH, the number of channels is reduced to a minimum of 20 channels and the channel hopping rate is reduced by 50% to 800 hops/s. AFH mode also uses 6 total slots so the Bluetooth transmitter hops at a rate of $800 / 6 = 133.3$ hops/s/slot

- $400\text{ms} \times 20$ hopping channels = 8 sec (Time of Occupancy Limit)
- Worst case BT has 133.3 hops/second/slot (for AFH mode with DH5 operation)
- $133.3 \text{ hops/s} / 20 \text{ channels} = 6.67 \text{ hops/second}$ (# of hops/second on one channel)
- $6.67 \text{ hops/s} / \text{channel} \times 8 \text{ seconds} = 53.34 \text{ hops}$ (# hops over a 8 second period)
- $53.34 \text{ hops} \times 2.875 \text{ ms/channel} = 153.35 \text{ ms}$ (worst case dwell time for one channel in AFH mode)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 54 of 89

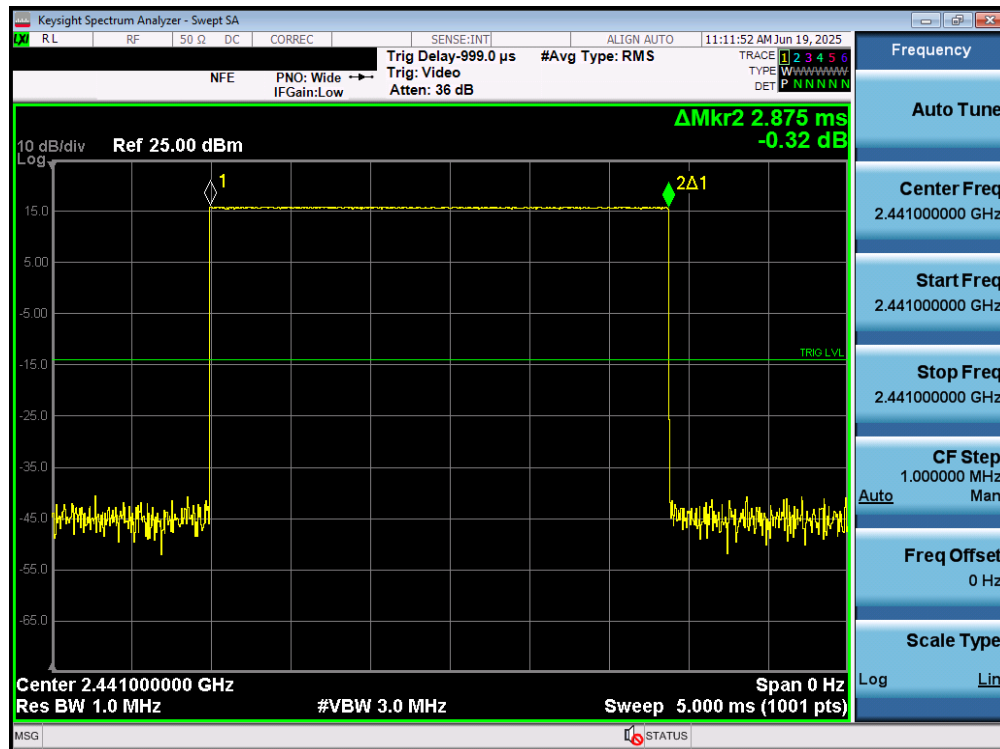

Plot 7-66. Time of Occupancy Plot (Bluetooth) – ANT 2

Bluetooth Time of Occupancy Calculation

Typically, Bluetooth 1x/EDR mode has a channel hopping rate of 1600 hops/s. Since 1x/EDR modes use 5 transmit and 1 receive slot, for a total of 6 slots, the Bluetooth transmitter is actually hopping at a rate of $1600 / 6 = 266.67$ hops/s/slot

- $400\text{ms} \times 79$ hopping channels = 31.6 sec (Time of Occupancy Limit)
- Worst case BT has 266.67 hops/second (for 1x/EDR modes with DH5 operation)
- $266.67 \text{ hops/second} / 79 \text{ channels} = 3.38 \text{ hops/second}$ (# of hops/second on one channel)
- $3.38 \text{ hops/second/channel} \times 31.6 \text{ seconds} = 106.67 \text{ hops}$ (# hops over a 31.6 second period)
- $106.67 \text{ hops} \times 2.875 \text{ ms/channel} = 306.68 \text{ ms}$ (worst case dwell time for one channel in 1x/EDR modes)

With AFH, the number of channels is reduced to a minimum of 20 channels and the channel hopping rate is reduced by 50% to 800 hops/s. AFH mode also uses 6 total slots so the Bluetooth transmitter hops at a rate of $800 / 6 = 133.3$ hops/s/slot

- $400\text{ms} \times 20$ hopping channels = 8 sec (Time of Occupancy Limit)
- Worst case BT has 133.3 hops/second/slot (for AFH mode with DH5 operation)
- $133.3 \text{ hops/s} / 20 \text{ channels} = 6.67 \text{ hops/second}$ (# of hops/second on one channel)
- $6.67 \text{ hops/s} / \text{channel} \times 8 \text{ seconds} = 53.34 \text{ hops}$ (# hops over a 8 second period)
- $53.34 \text{ hops} \times 2.875 \text{ ms/channel} = 153.35 \text{ ms}$ (worst case dwell time for one channel in AFH mode)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 55 of 89

7.7 Number of Hopping Channels

§15.247 (a.1.iii); RSS-247 [5.1(4)]

Test Overview and Limit

Measurement is made while EUT is operating in hopping mode. ***This frequency hopping system must employ a minimum of 15 hopping channels.***

Test Procedure Used

ANSI C63.10:2020 – Section 7.8.3

Test Settings

1. Span = frequency of band of operation (divided into two plots)
2. RBW < 30% of channel spacing or 20dB bandwidth, whichever is smaller
3. VBW ≥ RBW
4. Sweep = auto
5. Detector = peak
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

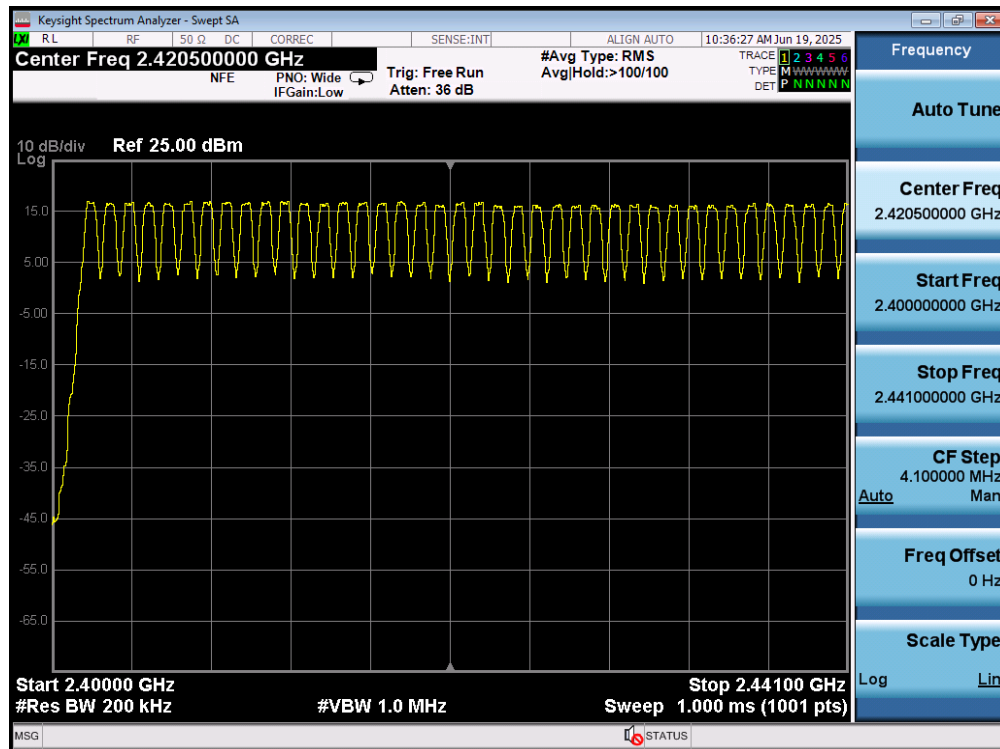


Figure 7-6. Test Instrument & Measurement Setup


Test Notes

The frequency spectrum was broken up into two sub-ranges to clearly show all the hopping frequencies. In AFH mode, this device operates using 20 channels so the requirement for minimum number of hopping channels is satisfied.

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 56 of 89




Plot 7-67. Low End Spectrum Channel Hopping Plot (Bluetooth) – Ant 1

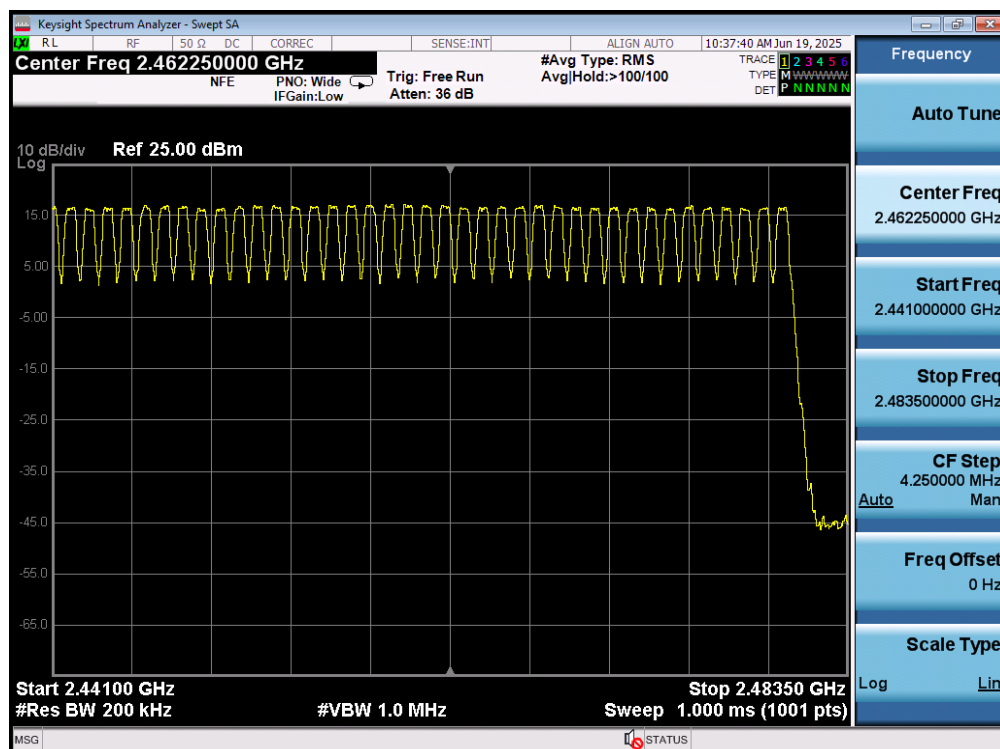


Plot 7-68. High End Spectrum Channel Hopping Plot (Bluetooth) – Ant 1

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 57 of 89

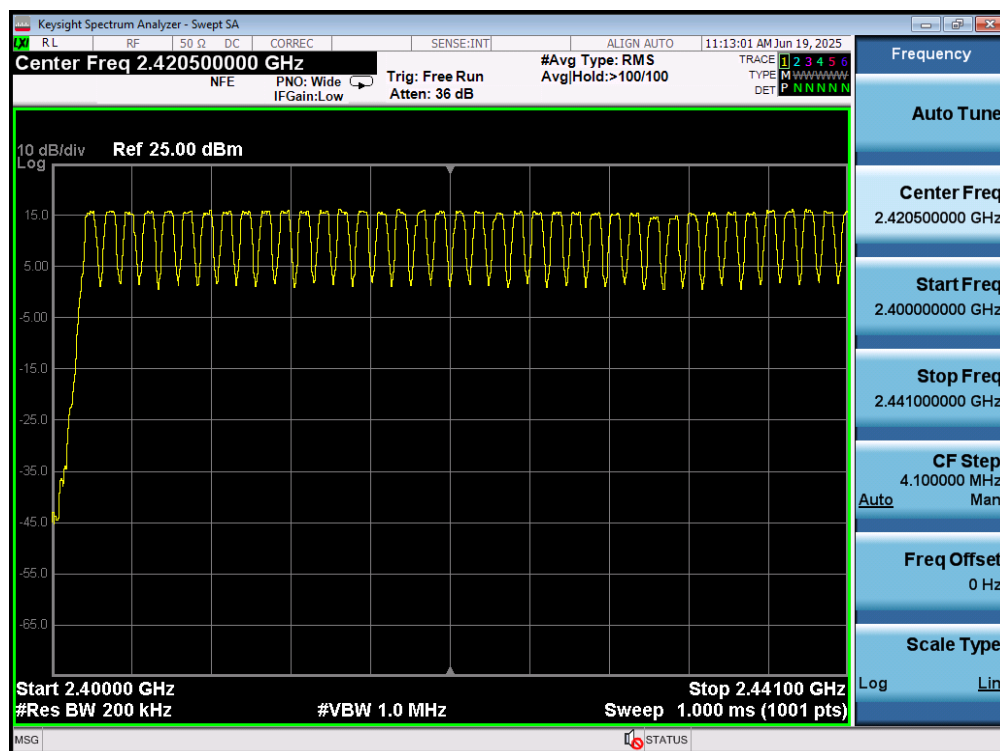

Plot 7-69. Low End Spectrum Channel Hopping Plot (Bluetooth) – Ant 2

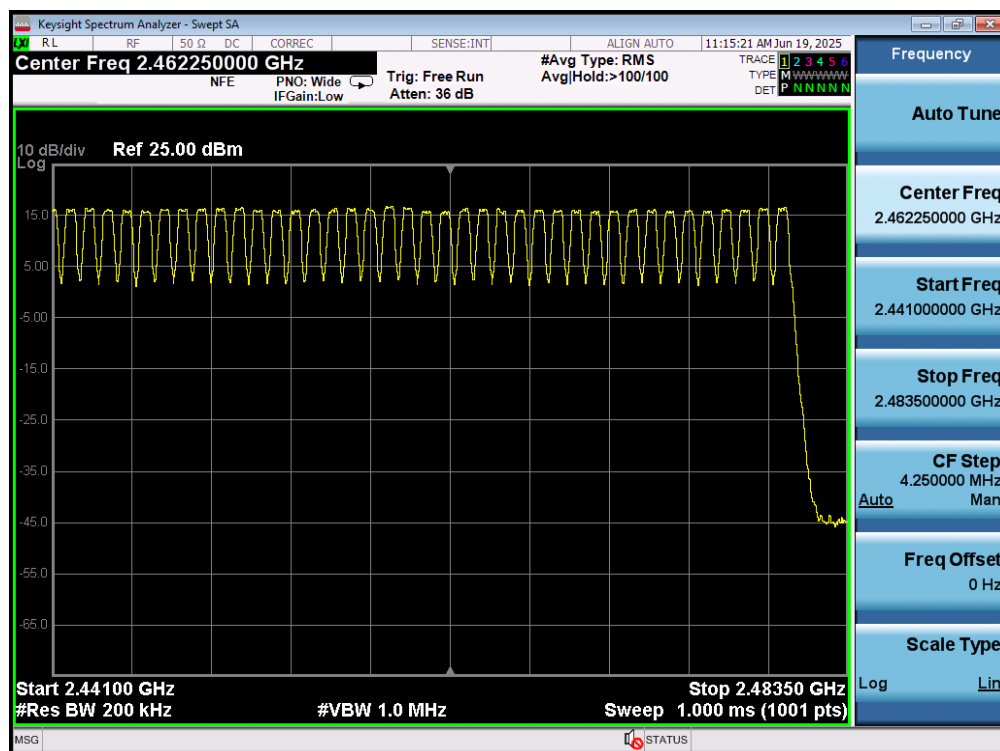

Plot 7-70. High End Spectrum Channel Hopping Plot (Bluetooth) – Ant 2

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 58 of 89

7.8 Conducted Spurious Emissions

§15.247 (d); RSS-247 [5.5]

Test Overview and Limit

Conducted out-of-band spurious emissions were investigated from 30MHz up to 25GHz to include the 10th harmonic of the fundamental transmit frequency. ***The maximum permissible out-of-band emission level is 20 dBc.***

Test Procedure Used

ANSI C63.10:2020 – Section 7.8.7

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz* (See note below)
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-7. Test Instrument & Measurement Setup

Test Notes


Out-of-band conducted spurious emissions were investigated for all data rates and the worst-case emissions were found with the EUT transmitting at 3Mbps. The display line shown in the following plots is the limit at 20dB below the fundamental emission level measured in a 100kHz bandwidth. However, the traces in the following plots are measured with a 1MHz RBW to reduce test time, so the display line may not necessarily appear to be 20dB below the level of the fundamental in a 1MHz bandwidth.

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 59 of 89

ANTENNA 1

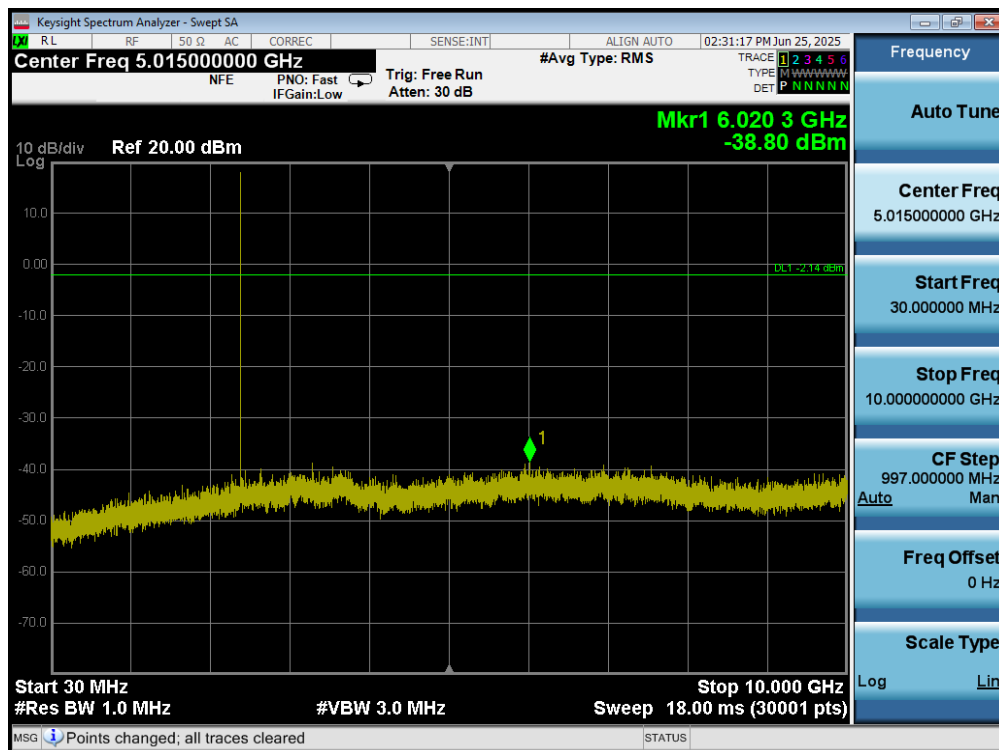


Plot 7-71. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 0) – ANT1

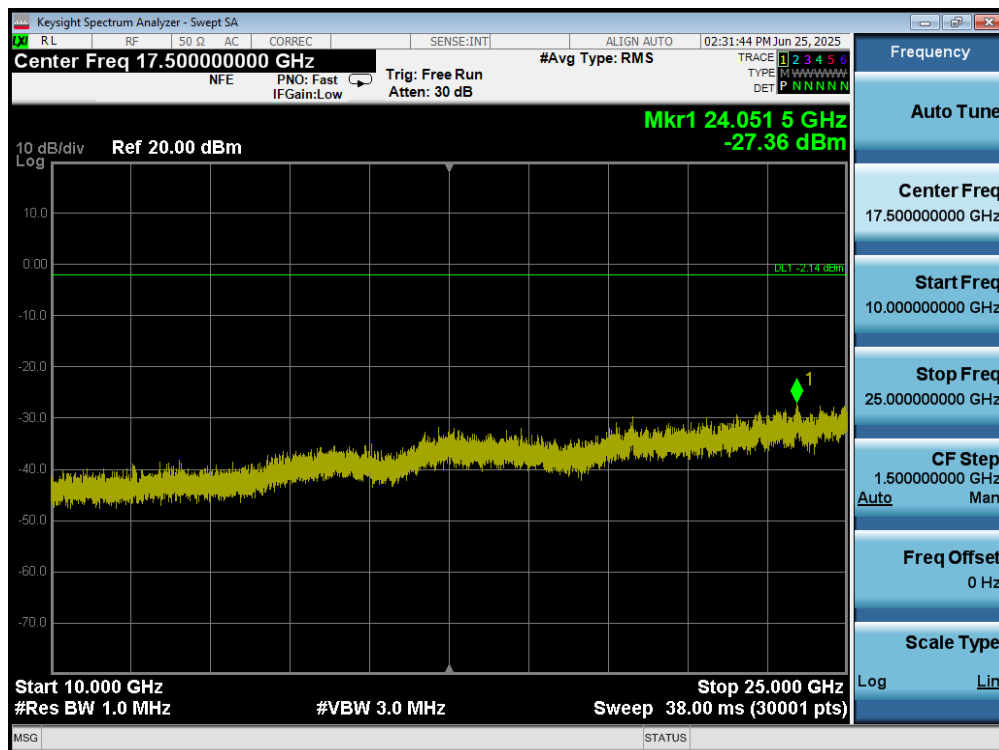


Plot 7-72. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 0) – ANT1

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 60 of 89

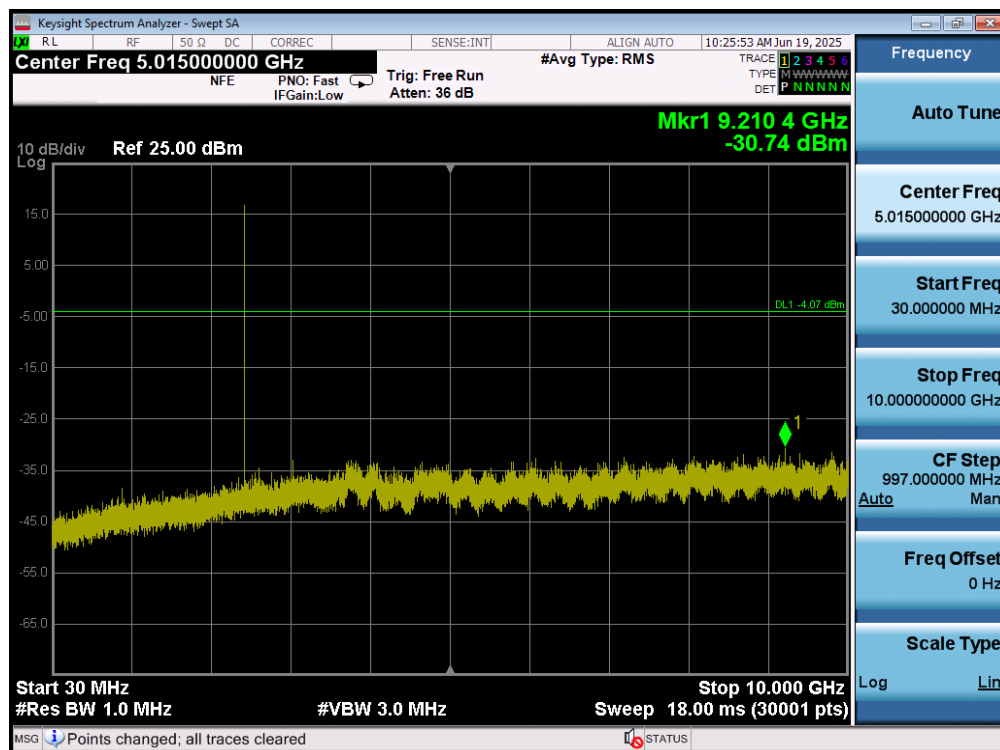


Plot 7-73. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 39) – ANT1

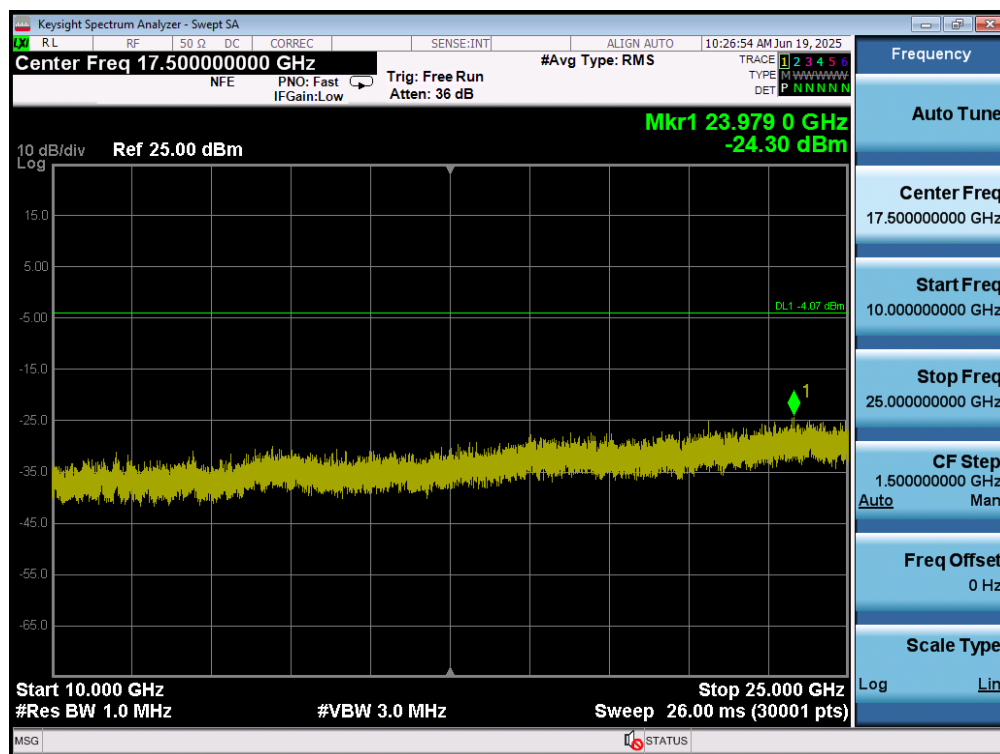


Plot 7-74. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 39) – ANT1

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 61 of 89

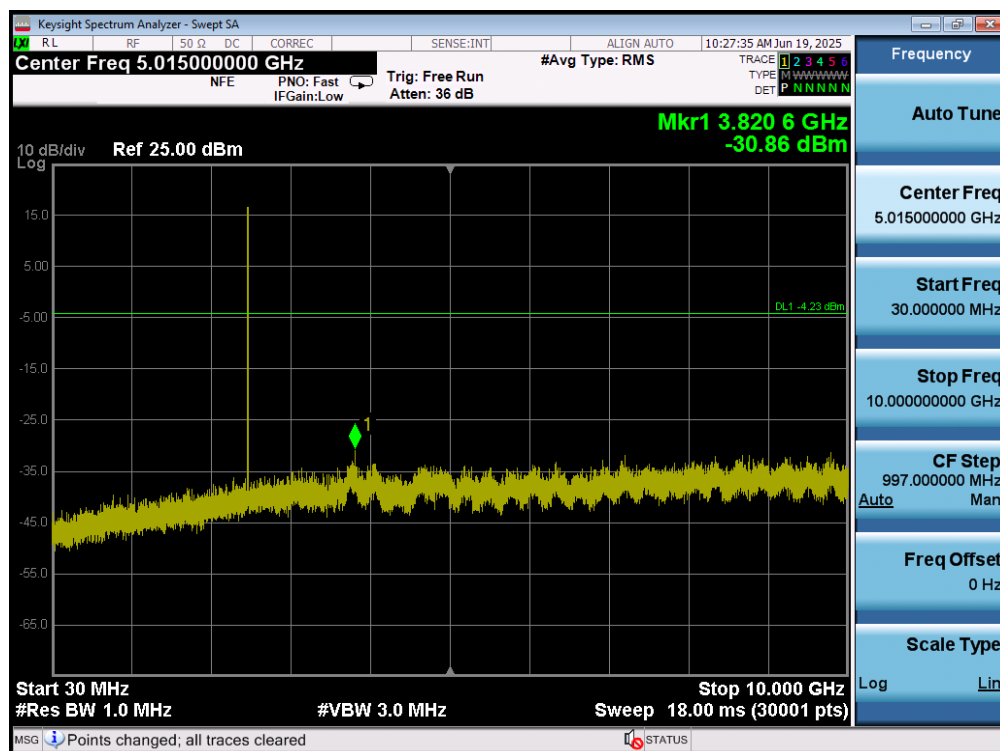


Plot 7-75. Conducted Spurious Plot (Bluetooth, 3Mbps - Ch. 78) - ANT1

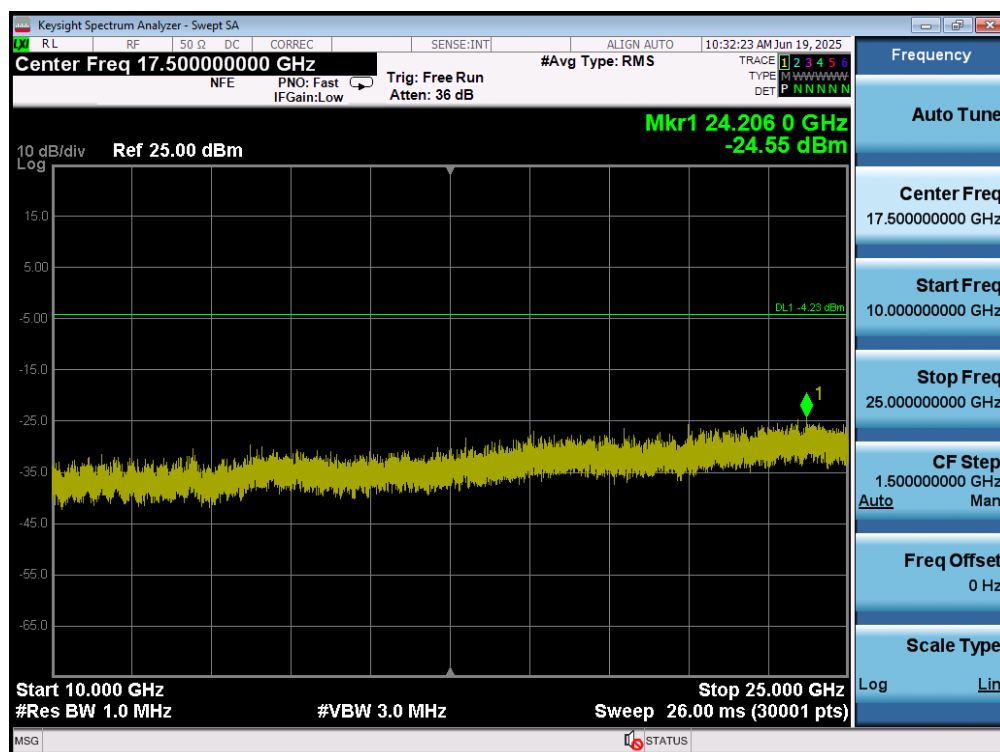


Plot 7-76. Conducted Spurious Plot (Bluetooth, 3Mbps - Ch. 78) - ANT1

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 62 of 89

ANTENNA 2

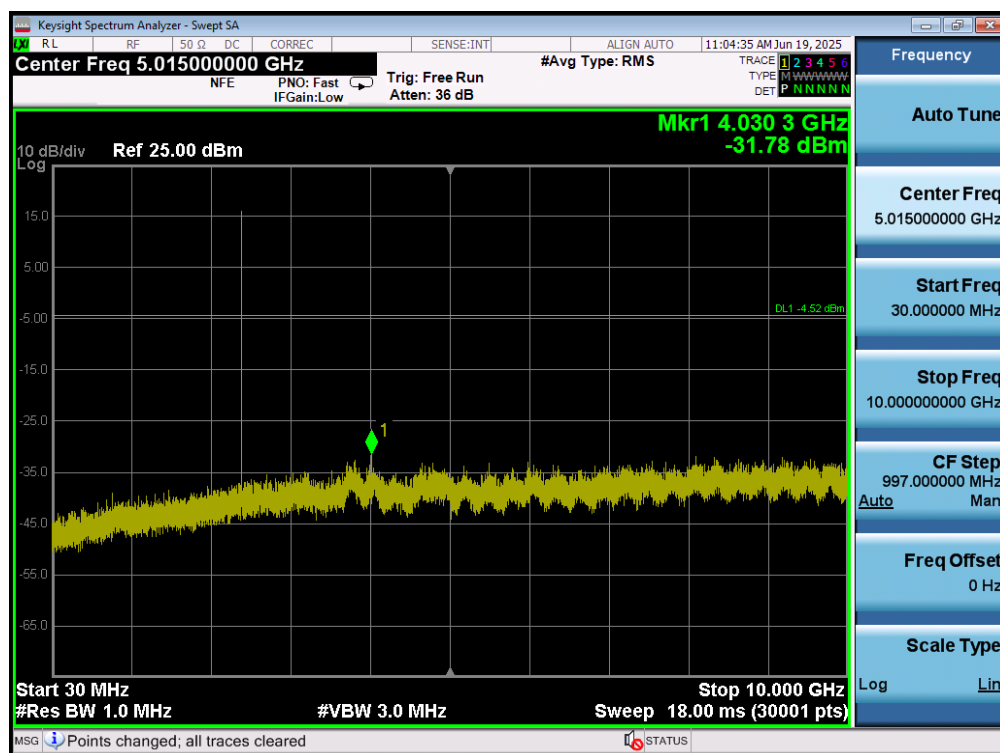


Plot 7-77. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 0) – ANT2

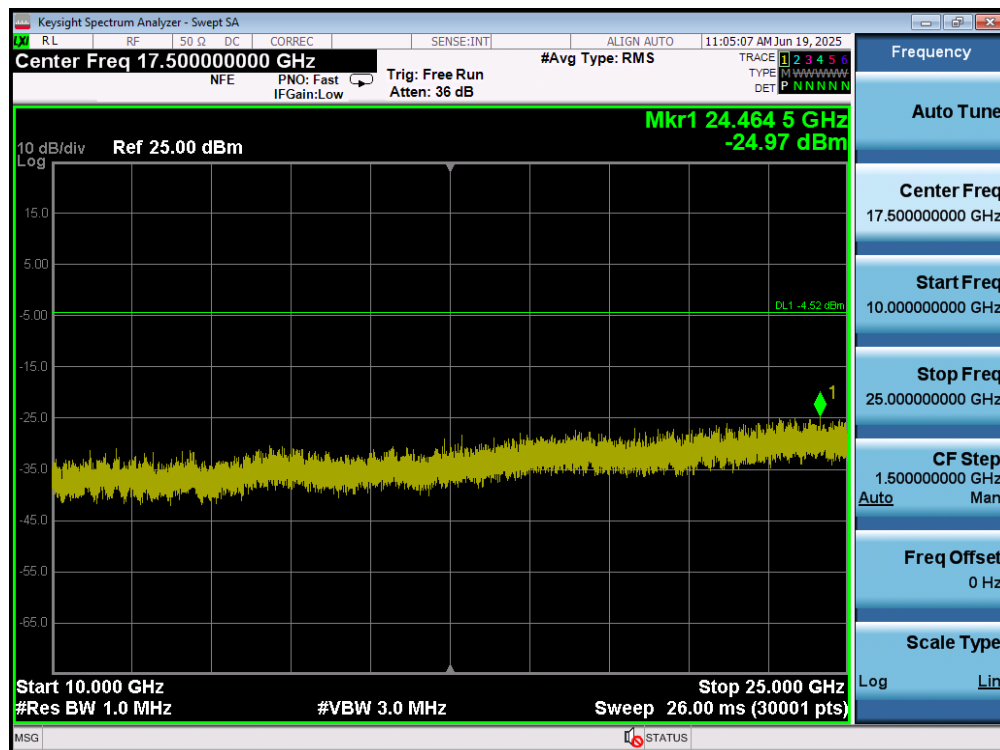


Plot 7-78. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 0) – ANT2

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 63 of 89

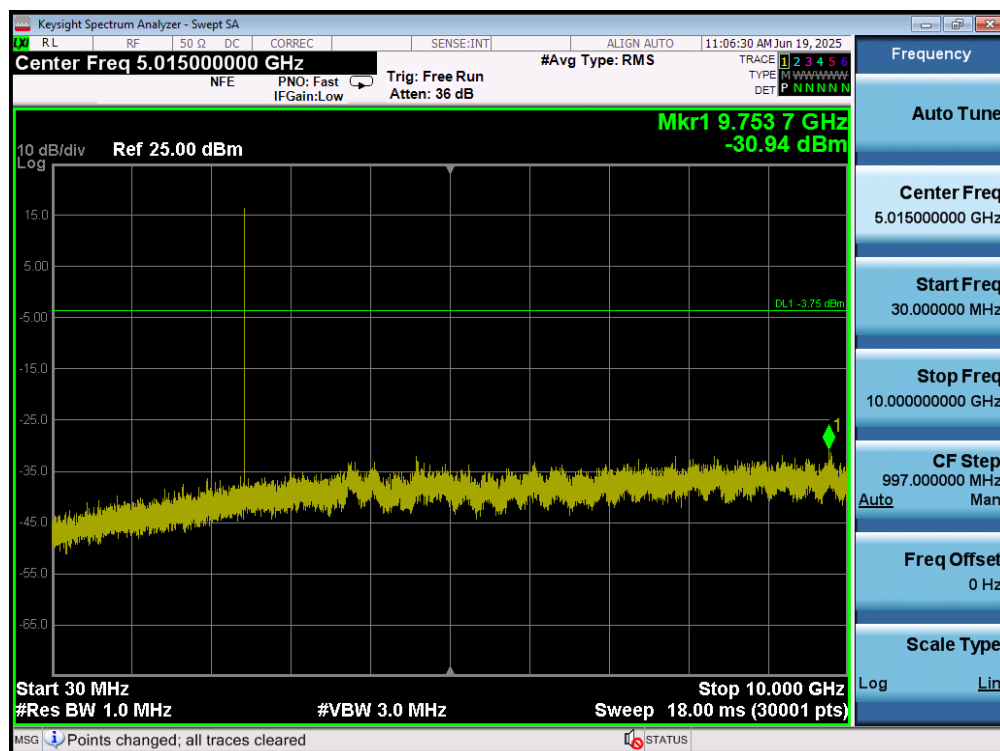


Plot 7-79. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 39) – ANT2

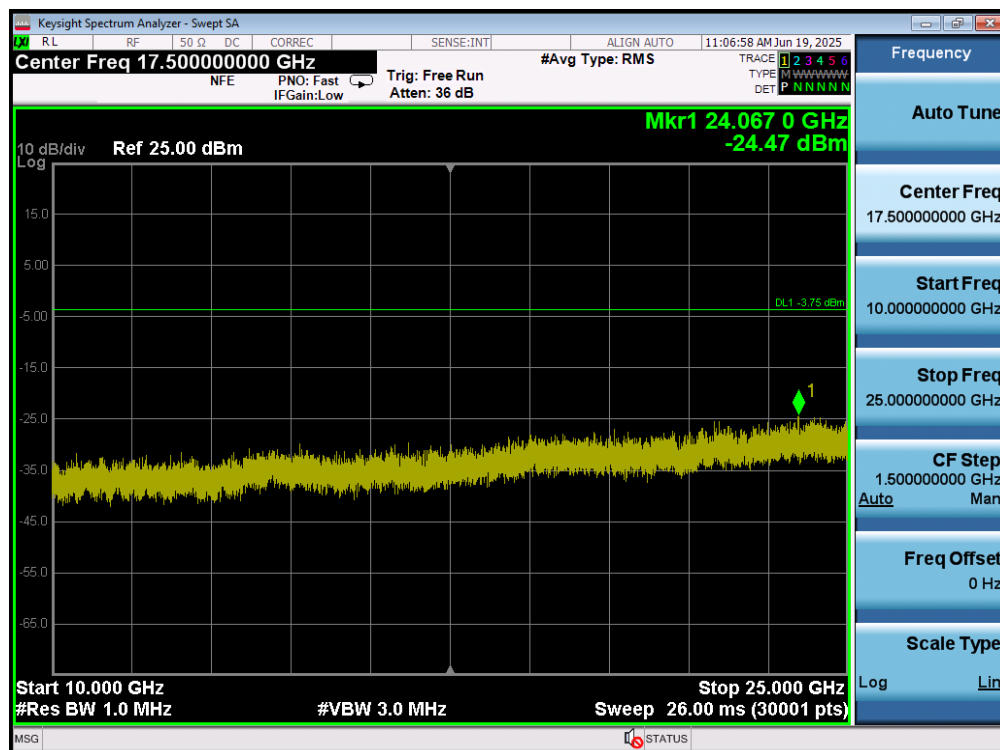


Plot 7-80. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 39) – ANT2

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 64 of 89

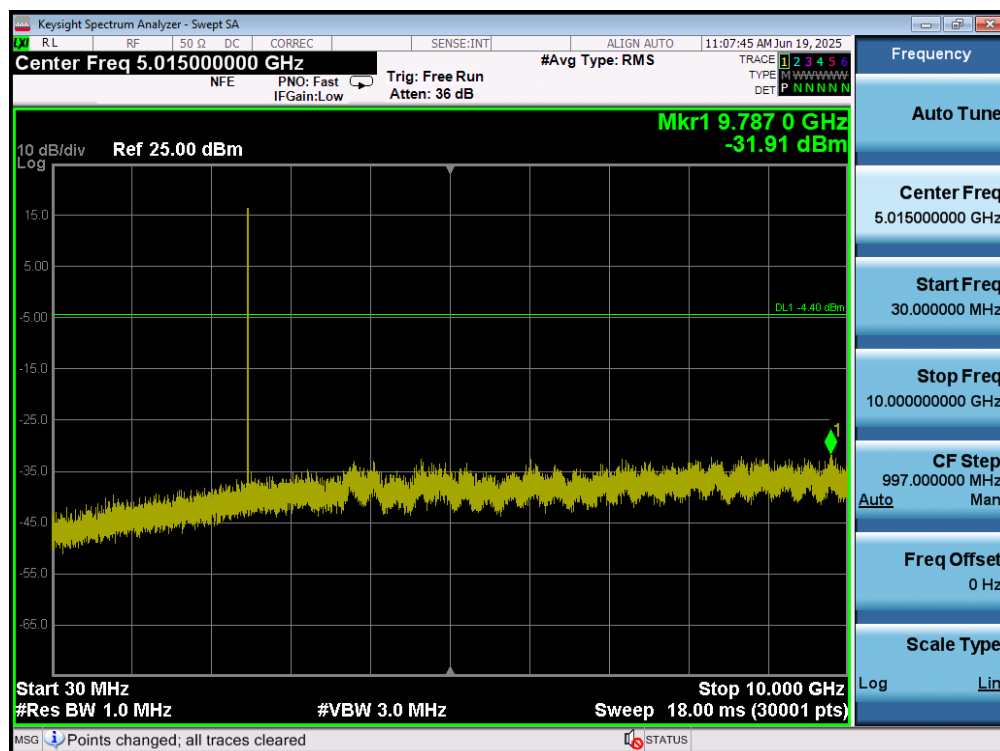

Plot 7-81. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 78) – ANT2

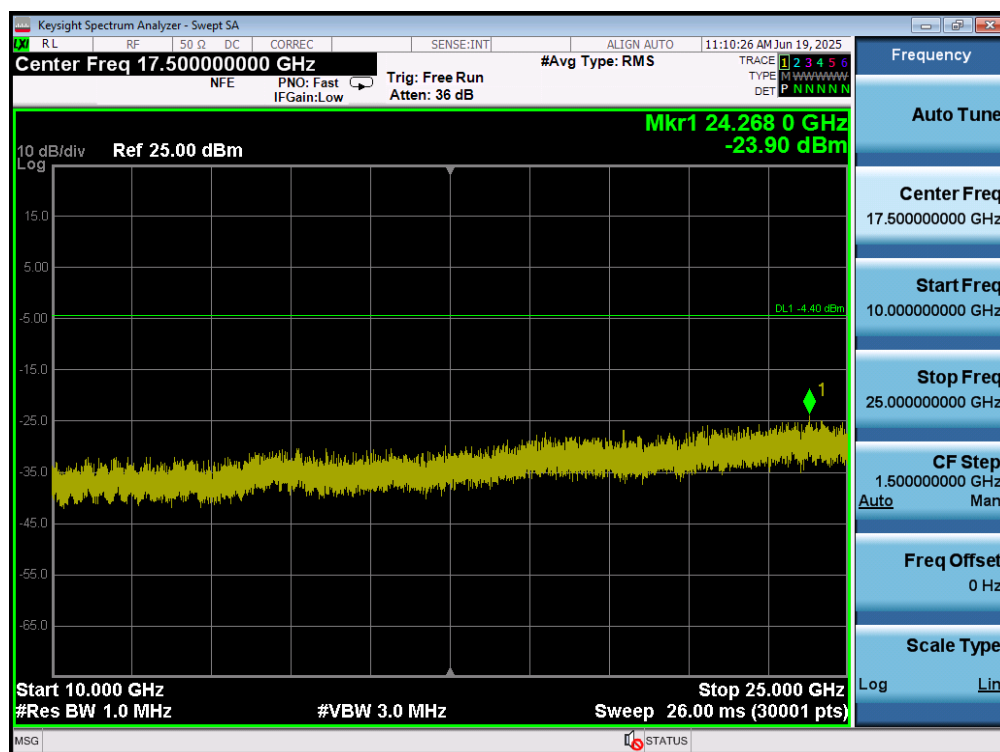

Plot 7-82. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 78) – ANT2

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 65 of 89

7.9 Radiated Spurious Emission Measurements – Above 1GHz

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst-case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown below per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-8. Radiated Limits

Test Procedure Used

ANSI C63.10:2020 – Section 6.6.4.3

Test Settings

Average Field Strength Measurements per Section 4.1.5.2.3 of ANSI C63.10:2020

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 1kHz $\geq 1/\tau$ Hz, where τ = pulse width in seconds
4. Averaging type was set to RMS to ensure that video filtering was applied in the power domain
5. Detector = peak
6. Sweep time = auto
7. Trace mode = max hold
8. Trace was allowed to stabilize

Peak Field Strength Measurements per Section 4.1.5.2.2 of ANSI C63.10:2020

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in Table 7-9 below
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 66 of 89

Frequency	RBW
9 – 150kHz	200 – 300Hz
0.15 – 30MHz	9 – 10kHz
30 – 1000MHz	100 – 120kHz
> 1000MHz	1MHz

Table 7-9. RBW as a Function of Frequency

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

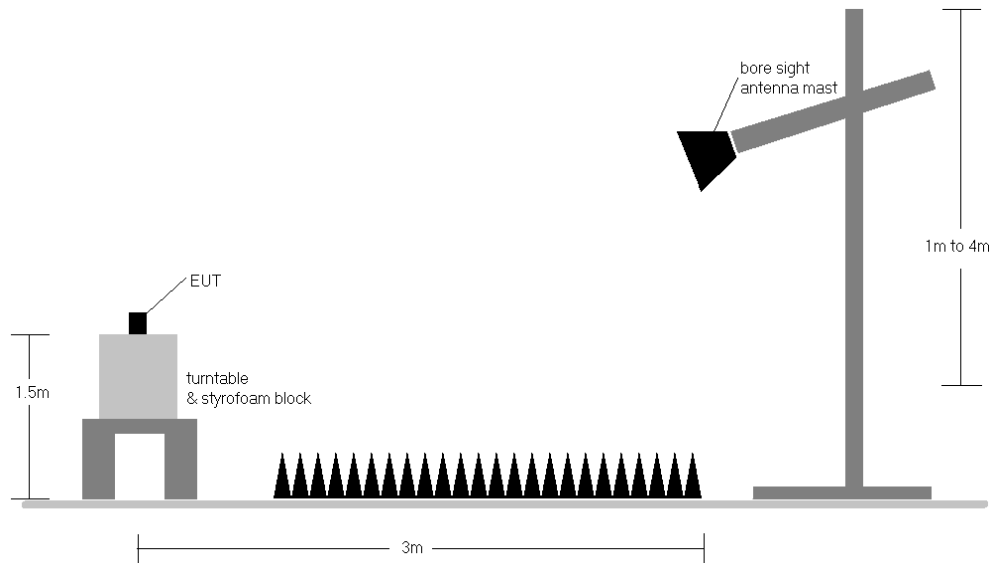


Figure 7-8. Radiated Test Setup >1GHz

Test Notes

- All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in §15.209.
- No significant radiated emissions were found in the 2310 - 2390MHz restricted band.
- The antenna is manipulated through typical positions, polarity, and length during the tests. The EUT is manipulated through three orthogonal planes.
- This unit was tested with its standard battery.
- The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
- The duty cycle correction factor was not applied to noise floor measurements.
- The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
- The "-" shown in the following RSE tables is used to denote a noise floor measurement.

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 67 of 89

Sample Calculation

- Field Strength Level $_{[dB_{\mu V/m}]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]} + \text{Duty Cycle Correction }_{[dB]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB_{\mu V/m}]} - \text{Limit }_{[dB_{\mu V/m}]}$


Duty Cycle Correction Factor Calculation

- Channel hop rate = 800 hops/second (AFH Mode)
- Adjusted channel hop rate for DH5 mode = 133.33 hops/second
- Time per channel hop = $1 / 133.33 \text{ hops/second} = 7.50 \text{ ms}$
- Time to cycle through all channels = $7.50 \times 20 \text{ channels} = 150 \text{ ms}$
- Number of times transmitter hits on one channel = $100 \text{ ms} / 150 \text{ ms} = 1 \text{ time(s)}$
- Worst case dwell time = 7.5 ms
- Duty cycle correction factor = $20\log_{10}(7.5\text{ms}/100\text{ms}) = -22.5 \text{ dB}$


FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 68 of 89

Radiated Spurious Emission Measurements – Ant 1


§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

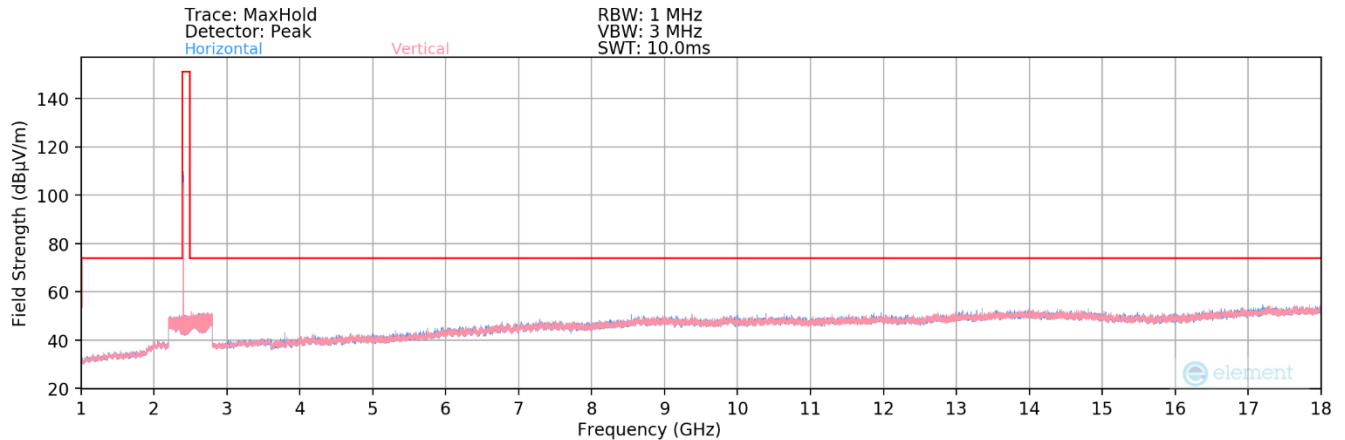

Plot 7-83. Radiated Spurious Plot above 1GHz (BT – Ch. 0) – ANT1

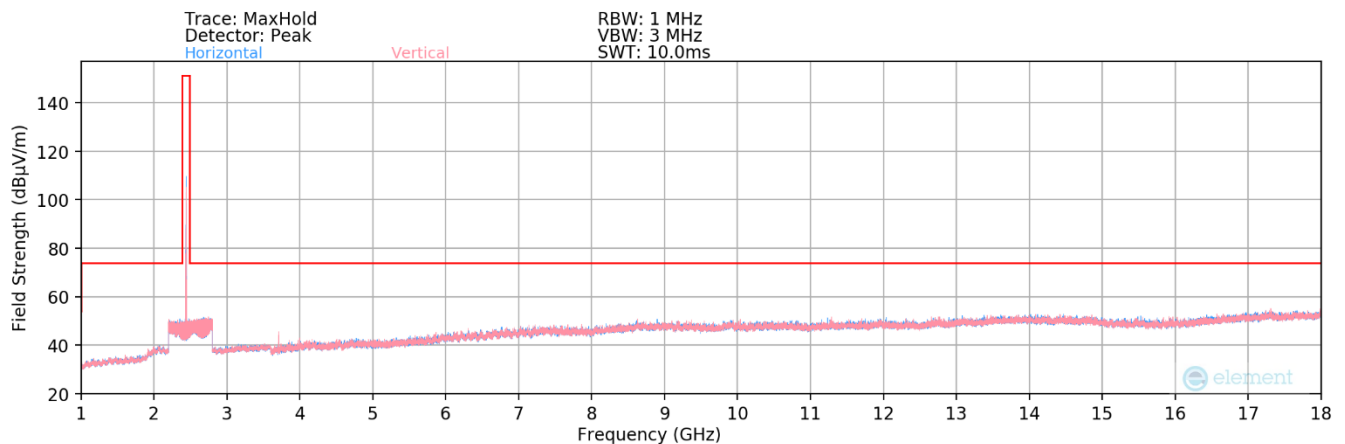

Plot 7-84. Radiated Spurious Plot above 1GHz (BT – Ch. 39) – ANT1

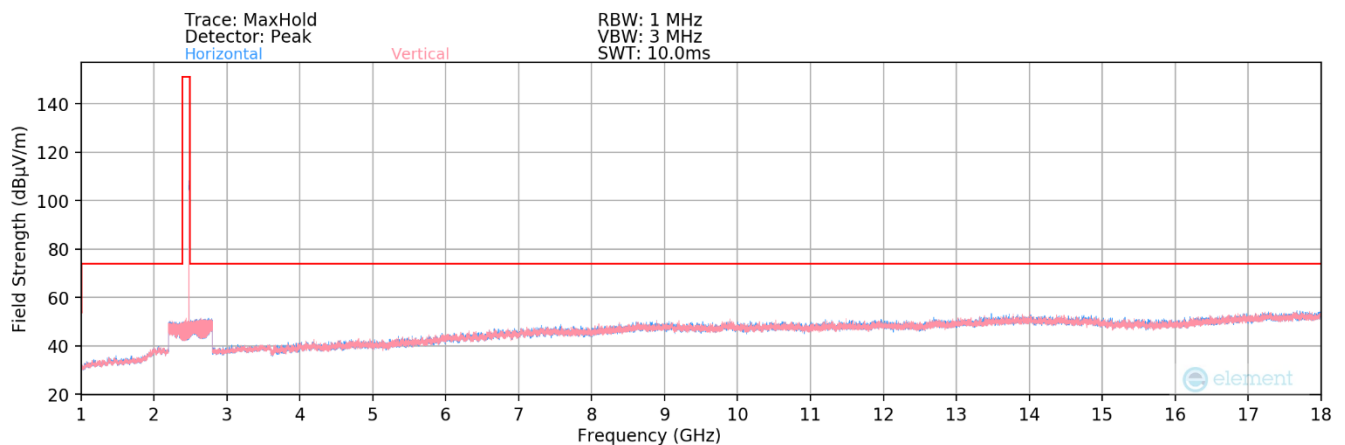


Plot 7-85. Radiated Spurious Plot above 1GHz (BT – Ch. 78) – ANT1

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 69 of 89

Radiated Spurious Emissions Measurements (Above 18GHz) – Ant 1

§15.209; RSS-Gen [8.9]

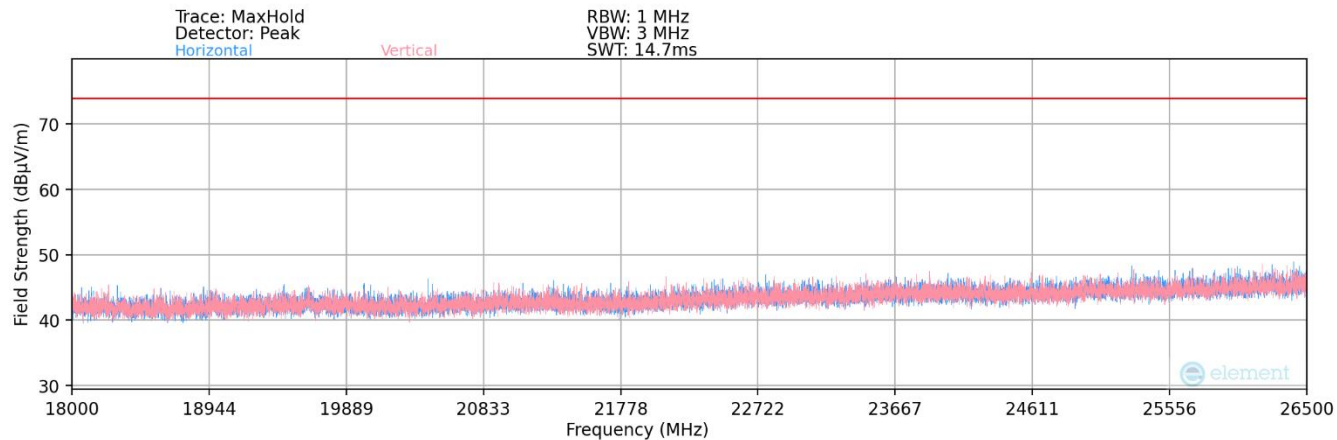

Plot 7-86. Radiated Spurious Plot above 18GHz– ANT1

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 70 of 89



Radiated Spurious Emission Measurements – Ant 1

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode: Bluetooth
Worst Case Data Rate: 1 Mbps
Measurement Distance: 3 Meters
Operating Frequency: 2402MHz
Channel: 0

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4804.00	Avg	V	-	-	-80.40	9.57	36.17	53.98	-17.81
4804.00	Peak	V	-	-	-68.59	9.57	47.98	73.98	-26.00
12010.00	Avg	V	-	-	-82.85	21.98	46.13	53.98	-7.85
12010.00	Peak	V	-	-	-72.15	21.98	56.83	73.98	-17.15

Table 7-10. Radiated Measurements– ANT1

Worst Case Mode: Bluetooth
Worst Case Data Rate: 1 Mbps
Measurement Distance: 3 Meters
Operating Frequency: 2441MHz
Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4880.00	Avg	V	-	-	-80.11	9.53	36.42	53.98	-17.56
4880.00	Peak	V	-	-	-68.27	9.53	48.26	73.98	-25.72
7320.00	Avg	V	-	-	-81.79	15.34	40.55	53.98	-13.43
7320.00	Peak	V	-	-	-70.94	15.34	51.40	73.98	-22.58
12200.00	Avg	V	-	-	-83.72	22.76	46.04	53.98	-7.94
12200.00	Peak	V	-	-	-72.57	22.76	57.19	73.98	-16.79

Table 7-11. Radiated Measurements– ANT1

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 71 of 89



Radiated Spurious Emission Measurements – Ant 1

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode: Bluetooth
Worst Case Data Rate: 1 Mbps
Measurement Distance: 3 Meters
Operating Frequency: 2480MHz
Channel: 78


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4960.00	Avg	V	-	-	-80.39	10.34	36.95	53.98	-17.03
4960.00	Peak	V	-	-	-69.20	10.34	48.14	73.98	-25.84
7440.00	Avg	V	-	-	-81.92	15.34	40.42	53.98	-13.56
7440.00	Peak	V	-	-	-70.51	15.34	51.83	73.98	-22.15
12400.00	Avg	V	-	-	-83.71	22.92	46.21	53.98	-7.77
12400.00	Peak	V	-	-	-72.61	22.92	57.31	73.98	-16.67

Table 7-12. Radiated Measurements– ANT1


FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 72 of 89

Radiated Spurious Emission Measurements – Ant 2


§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

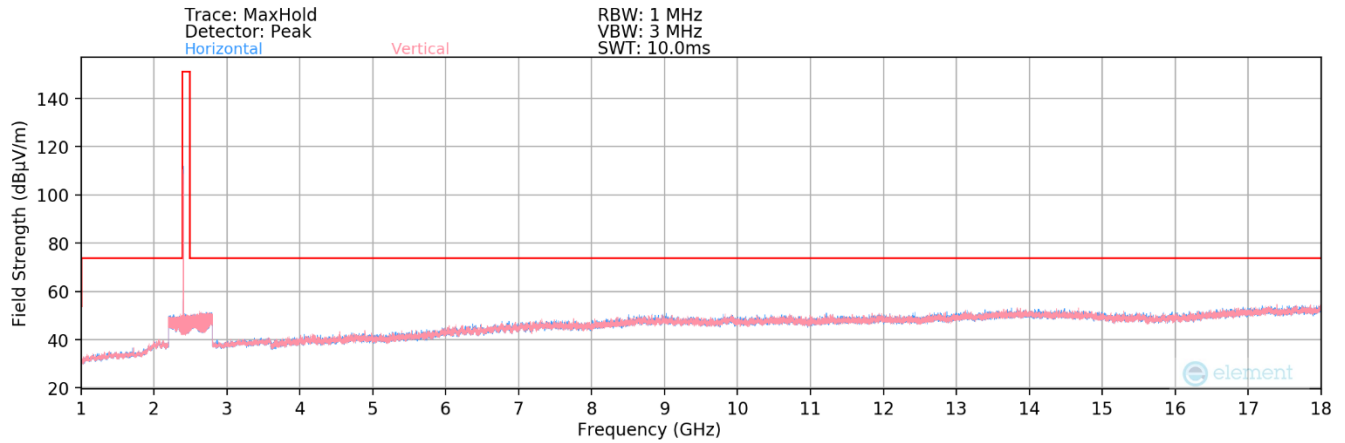

Plot 7-87. Radiated Spurious Plot above 1GHz (BT – Ch. 0) – ANT2

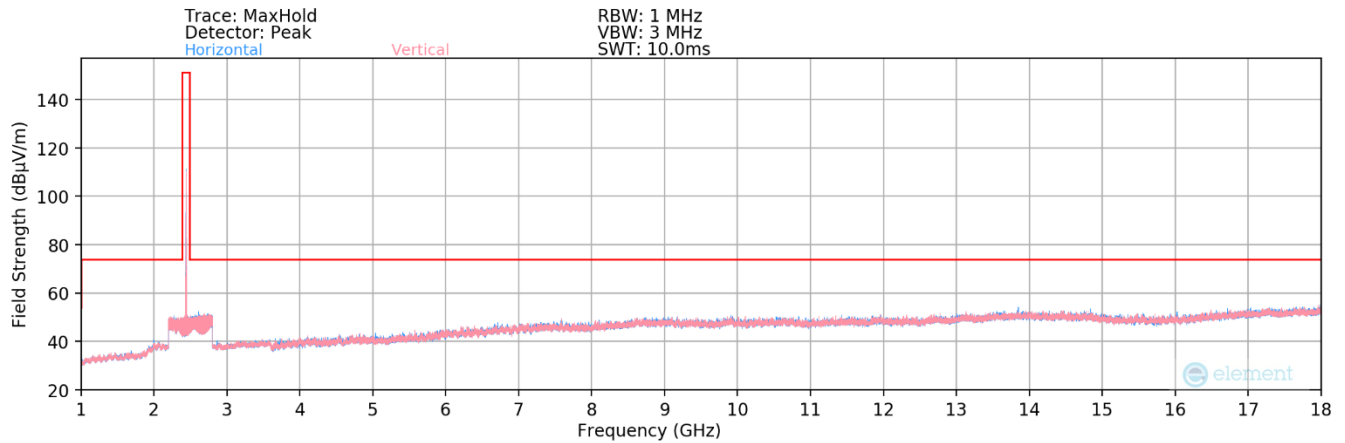

Plot 7-88. Radiated Spurious Plot above 1GHz (BT – Ch. 39) – ANT2

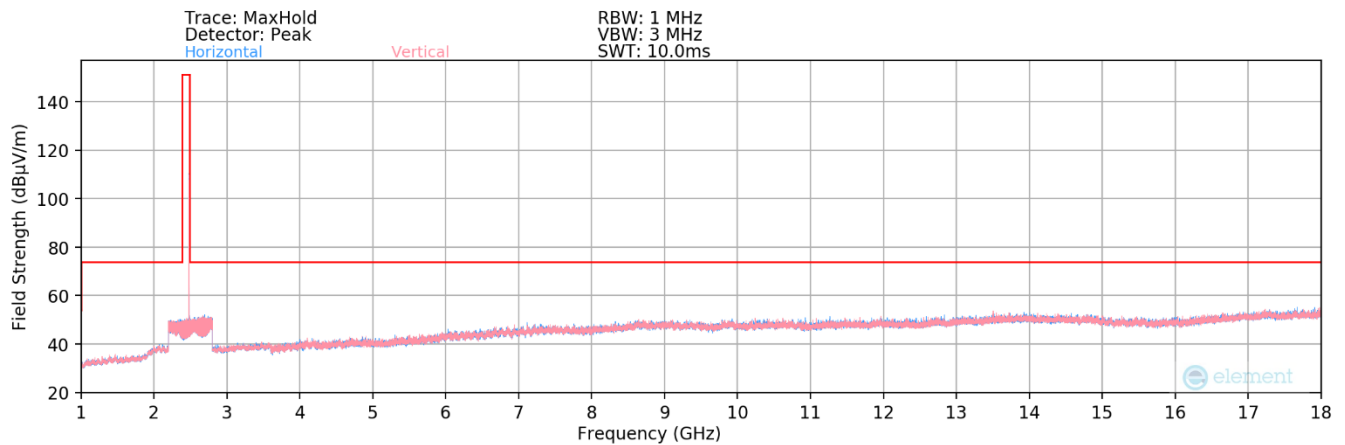


Plot 7-89. Radiated Spurious Plot above 1GHz (BT – Ch. 78) – ANT2

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 73 of 89

Radiated Spurious Emissions Measurements (Above 18GHz) – Ant 2

§15.209; RSS-Gen [8.9]

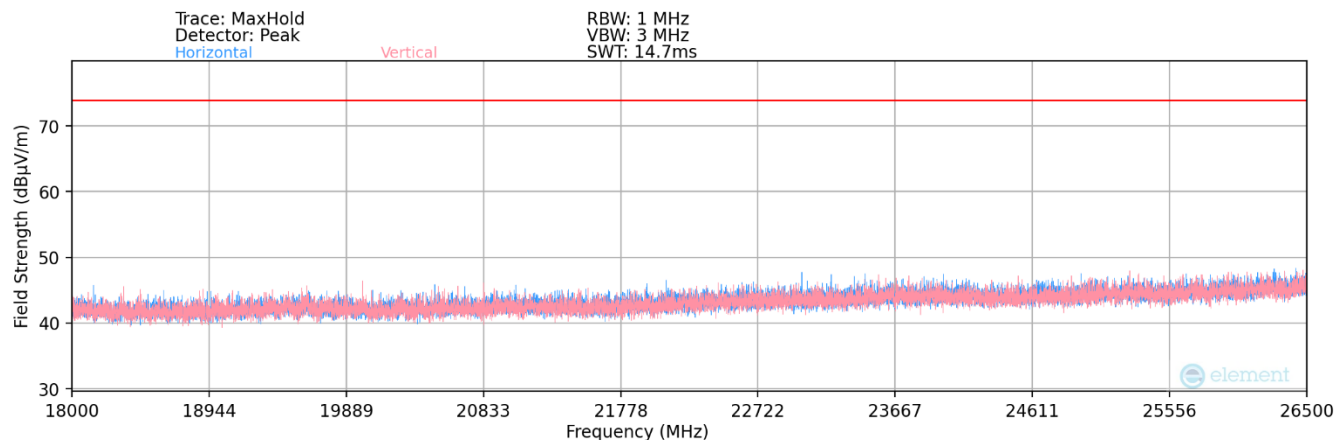

Plot 7-90. Radiated Spurious Plot above 18GHz– ANT2

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 74 of 89



Radiated Spurious Emission Measurements – Ant 2

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode: Bluetooth
Worst Case Data Rate: 1 Mbps
Measurement Distance: 3 Meters
Operating Frequency: 2402MHz
Channel: 0

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4804.00	Avg	V	-	-	-80.60	9.57	35.97	53.98	-18.01
4804.00	Peak	V	-	-	-68.91	9.57	47.66	73.98	-26.32
12010.00	Avg	V	-	-	-82.89	21.98	46.09	53.98	-7.89
12010.00	Peak	V	-	-	-72.02	21.98	56.96	73.98	-17.02

Table 7-13. Radiated Measurements – ANT2

Worst Case Mode: Bluetooth
Worst Case Data Rate: 1 Mbps
Measurement Distance: 3 Meters
Operating Frequency: 2441MHz
Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4880.00	Avg	V	-	-	-80.25	9.53	36.28	53.98	-17.70
4880.00	Peak	V	-	-	-69.38	9.53	47.15	73.98	-26.83
7320.00	Avg	V	-	-	-81.74	15.34	40.60	53.98	-13.38
7320.00	Peak	V	-	-	-70.31	15.34	52.03	73.98	-21.95
12200.00	Avg	V	-	-	-83.64	22.76	46.12	53.98	-7.86
12200.00	Peak	V	-	-	-72.70	22.76	57.06	73.98	-16.92

Table 7-14. Radiated Measurements – ANT2

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 75 of 89



Radiated Spurious Emission Measurements – Ant 2

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode: Bluetooth
Worst Case Data Rate: 1 Mbps
Measurement Distance: 3 Meters
Operating Frequency: 2480MHz
Channel: 78

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4960.00	Avg	V	-	-	-80.61	10.34	36.73	53.98	-17.25
4960.00	Peak	V	-	-	-69.73	10.34	47.61	73.98	-26.37
7440.00	Avg	V	-	-	-81.92	15.34	40.42	53.98	-13.56
7440.00	Peak	V	-	-	-70.65	15.34	51.69	73.98	-22.29
12400.00	Avg	V	-	-	-83.32	22.92	46.60	53.98	-7.38
12400.00	Peak	V	-	-	-72.40	22.92	57.52	73.98	-16.46

Table 7-15. Radiated Measurements– ANT2

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 76 of 89

7.10 Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated emissions at the band edge are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power, at the appropriate frequencies, and with hopping disabled. Only the radiated emissions of the configuration that produced the worst-case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown below per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-16. Radiated Limits

Test Procedure Used

ANSI C63.10:2020 – Section 6.10.5.2

Test Settings

- Span is set large enough to capture the peak level of the emission operating on the channel closest to the band edge
- Reference level offset is set with the appropriate corrections for the frequencies shown in the plots
- Reference level is set to provide the appropriate amount of “head room” above the signal as specified in ANSI C63.10:2020 Section 4.1.6.2
- Attenuation is set to a low enough level to maintain enough dynamic range between the noise floor and the radiated limit
- Sweep time = Auto coupled
- RBW = 1MHz
- VBW = 3 x RBW for peak measurements and 1kHz for RMS measurements
- Detector = RMS and peak
- Trace = Max Hold
- Trace was allowed to stabilize

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 77 of 89

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

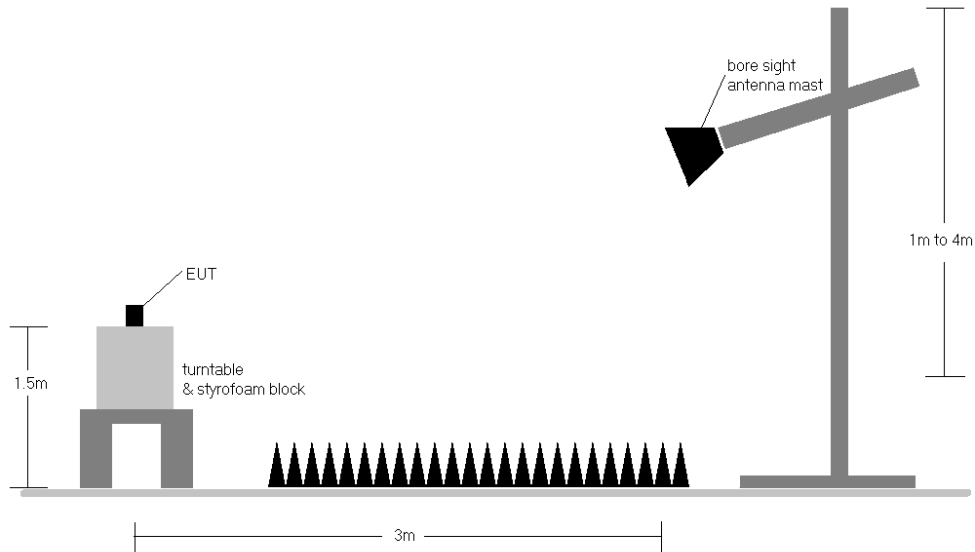


Figure 7-9. Radiated Test Setup >1GHz

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limits shown in §15.209.
2. No significant radiated emissions were found in the 2310 - 2390MHz restricted band.
3. The antenna is manipulated through typical positions, polarity, and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
6. Two different amplitude offsets were used depending on whether peak or average measurements were measured. The average measurements use a duty cycle correction factor (DCCF).

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain} + \text{DCCF}$$

7. The "-" shown in the following RSE tables is used to denote a noise floor measurement.


FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 78 of 89




Radiated Restricted Band Edge Measurements – Ant 1

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode:	Bluetooth
Worst Case Data Rate:	1 Mbps
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	78

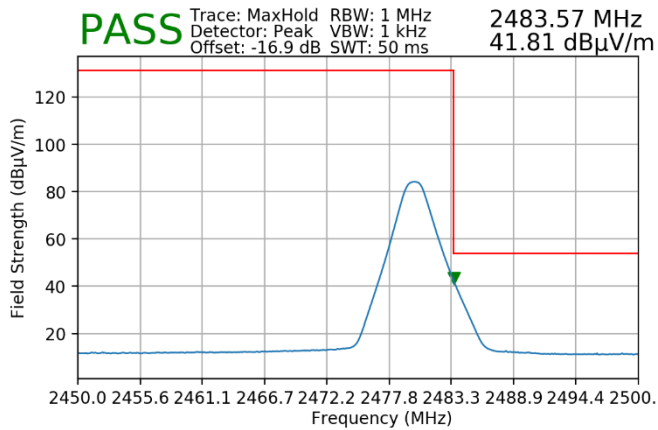

Plot 7-91. Radiated Restricted Upper Band Edge Measurement (Average) – ANT1

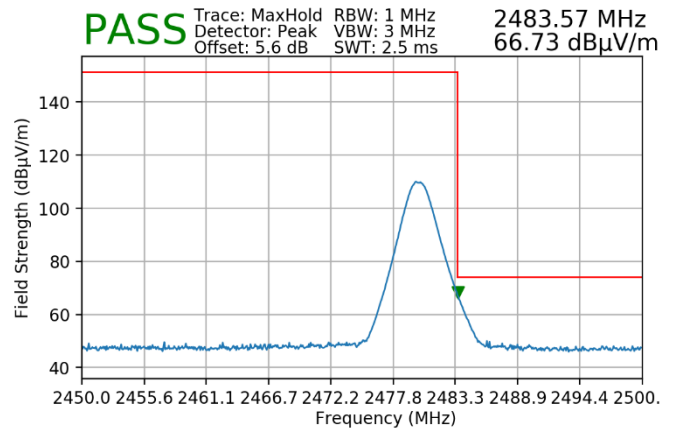


Plot 7-92. Radiated Restricted Upper Band Edge Measurement (Peak) – ANT1

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 79 of 89


Radiated Restricted Band Edge Measurements – Ant 2

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode:	Bluetooth
Worst Case Data Rate:	1 Mbps
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	78

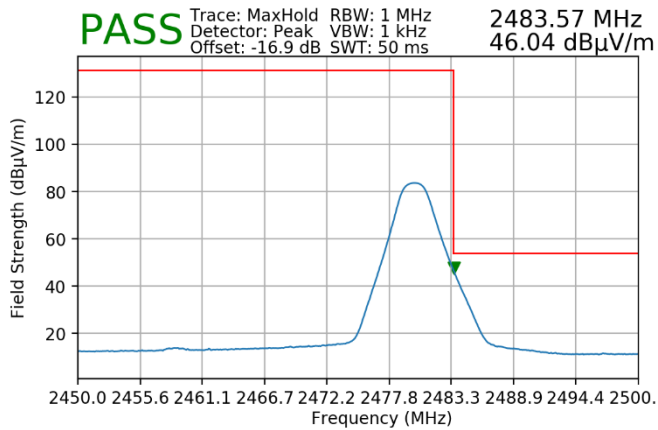

Plot 7-93. Radiated Restricted Upper Band Edge Measurement (Average) – ANT2

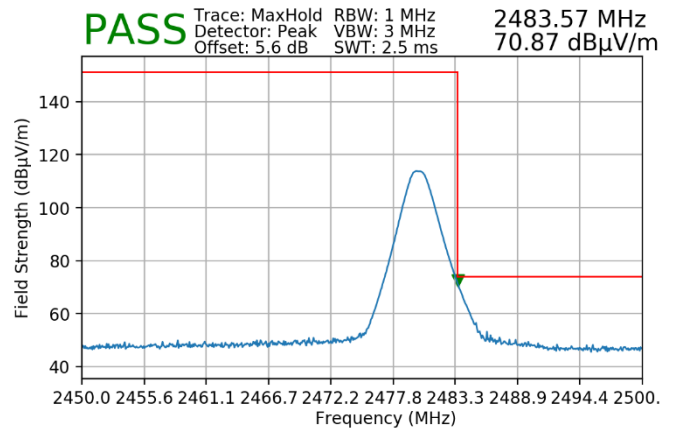

Plot 7-94. Radiated Restricted Upper Band Edge Measurement (Peak) – ANT2

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 80 of 89

7.11 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions must not exceed the limits shown below per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-17. Radiated Limits

Test Procedures Used

ANSI C63.10:2020

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 81 of 89

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

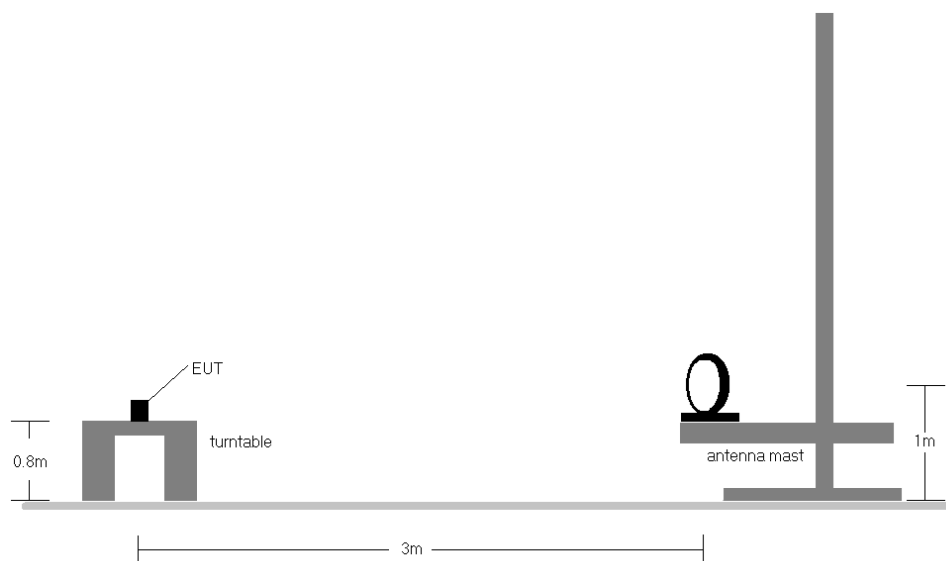


Figure 7-10. Radiated Test Setup < 30Mhz

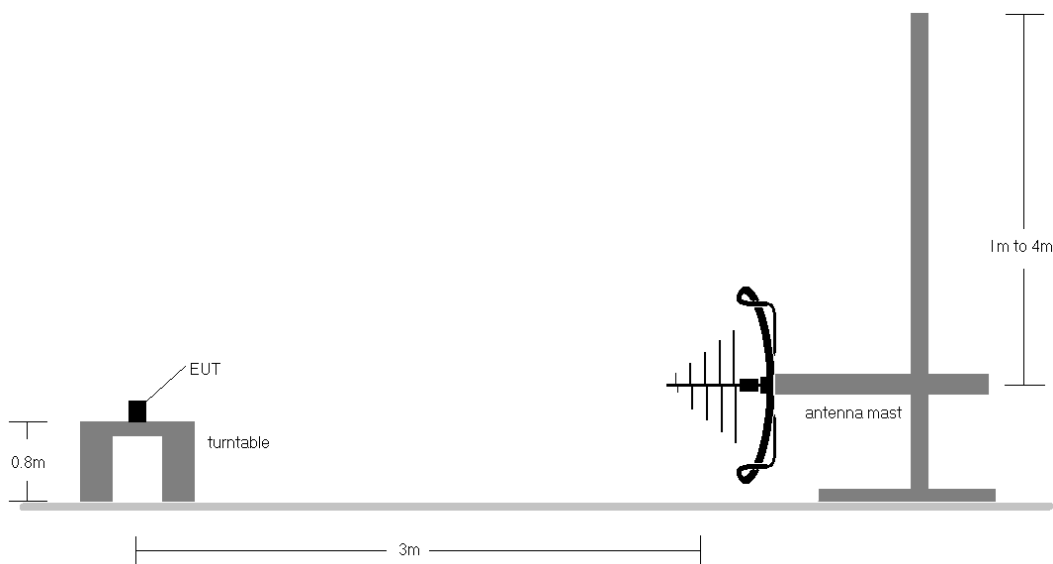


Figure 7-11. Radiated Test Setup < 1GHz

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 82 of 89


Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limits shown in §15.209.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
4. Emissions were measured at a 3 meter test distance.
5. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
6. No spurious emissions were detected within 20dB of the limit below 30MHz.
7. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
8. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 83 of 89

Radiated Spurious Emissions Measurements (Below 1GHz) – Ant 1

§15.209; RSS-Gen [8.9]

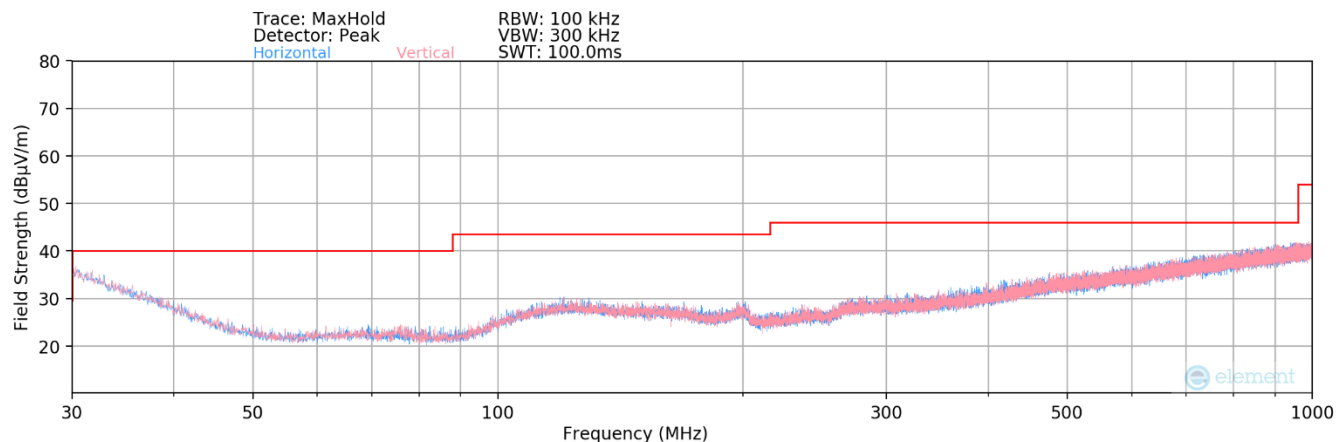

Plot 7-95. Radiated Spurious Plot below 1GHz – Ant 1


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
41.03	Quasi-Peak	H	-	-	-70.90	-12.40	23.70	40.00	-16.30
733.06	Quasi-Peak	H	-	-	-83.40	-3.01	20.59	46.02	-25.43

Table 7-18. Radiated Spurious Emissions Below 1GHz – Ant 1

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 84 of 89

Radiated Spurious Emissions Measurements (Below 1GHz) – Ant 2

§15.209; RSS-Gen [8.9]

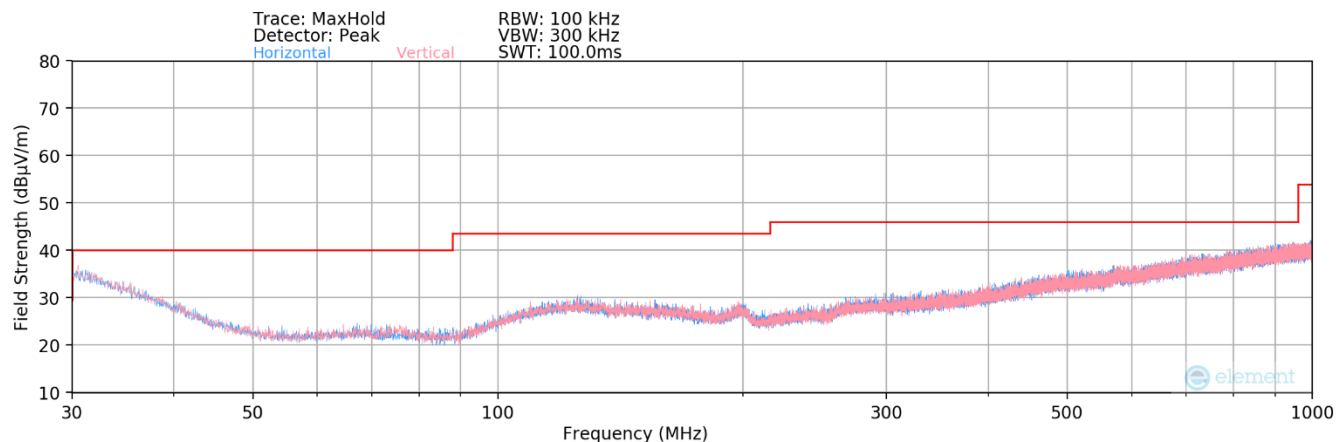

Plot 7-96. Radiated Spurious Plot below 1GHz – Ant 2

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
43.84	Quasi-Peak	H	-	-	-70.80	-11.82	24.38	40.00	-15.62
832.61	Quasi-Peak	H	-	-	-83.70	-1.42	21.88	46.02	-24.15

Table 7-19. Radiated Spurious Emissions Below 1GHz – Ant 2

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 85 of 89

7.12 Line Conducted Measurement Data

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-20. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10:2020, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 86 of 89

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


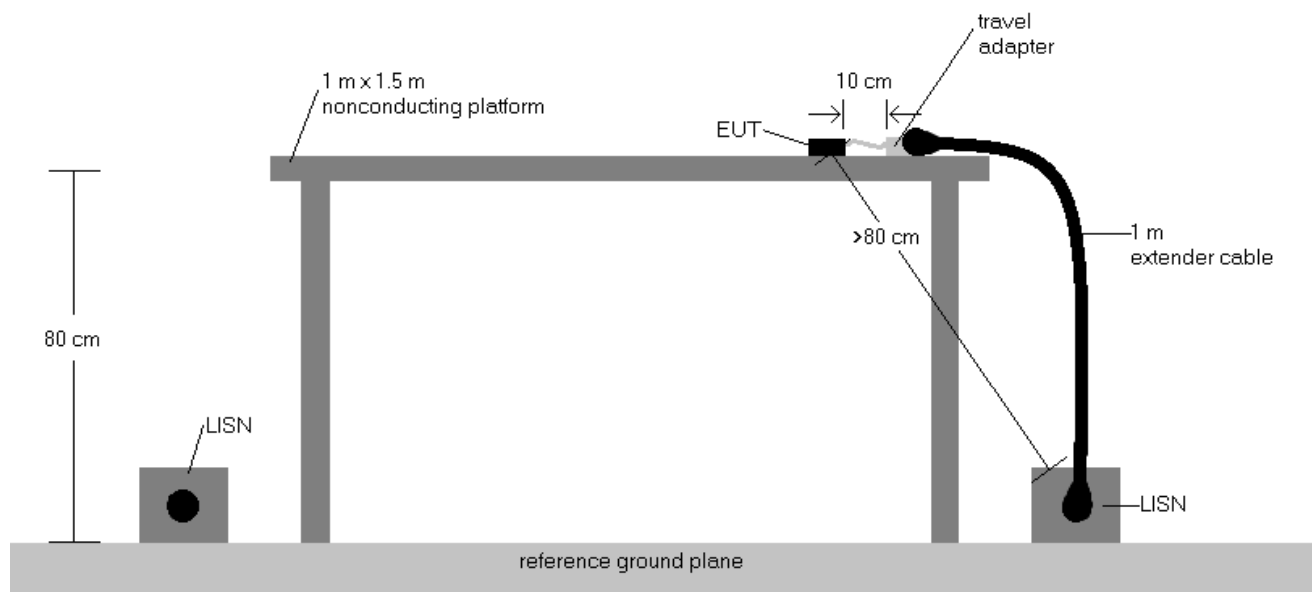


Figure 7-12. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated, and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 87 of 89

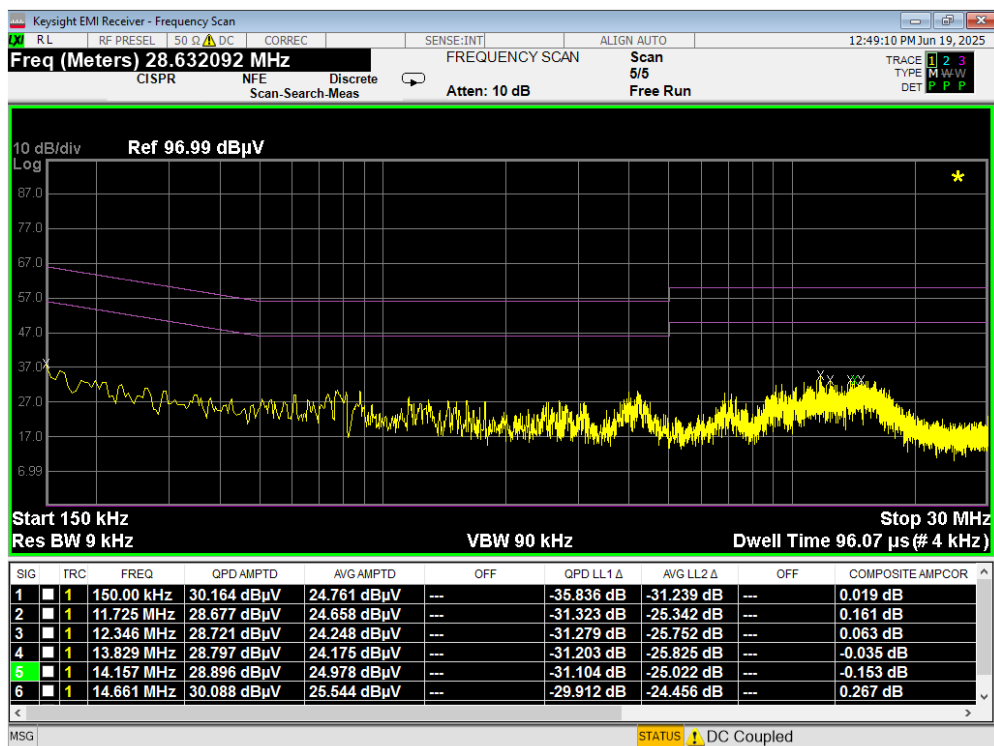

Plot 7-97. Line-Conducted Test Plot (L1) – ANT1

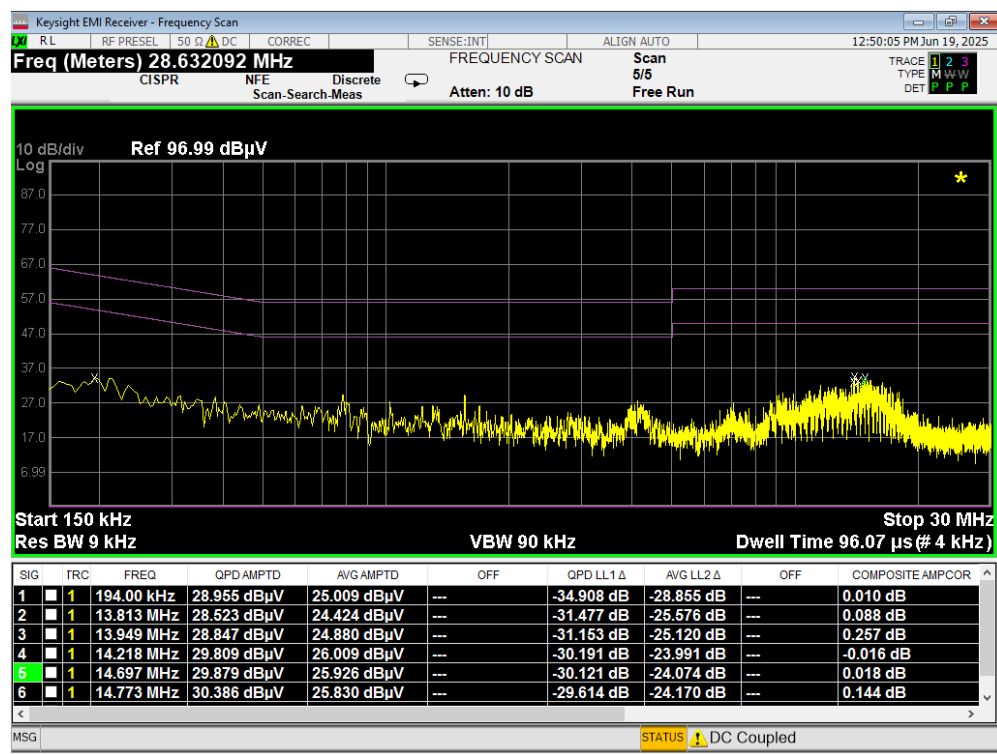

Plot 7-98. Line-Conducted Test Plot (N) – ANT1

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 88 of 89

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Tablet FCC ID: A3LSMX930, IC: 649E-SMX930** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the ISED Canada Rules.

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2505130048-01.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 89 of 89