





Plot 7-113. Power Spectral Density Plot MIMO ANT2 (160MHz BW 802.11be – 996\*2 Tones (UNII Band 3/4) – Ch. 163)

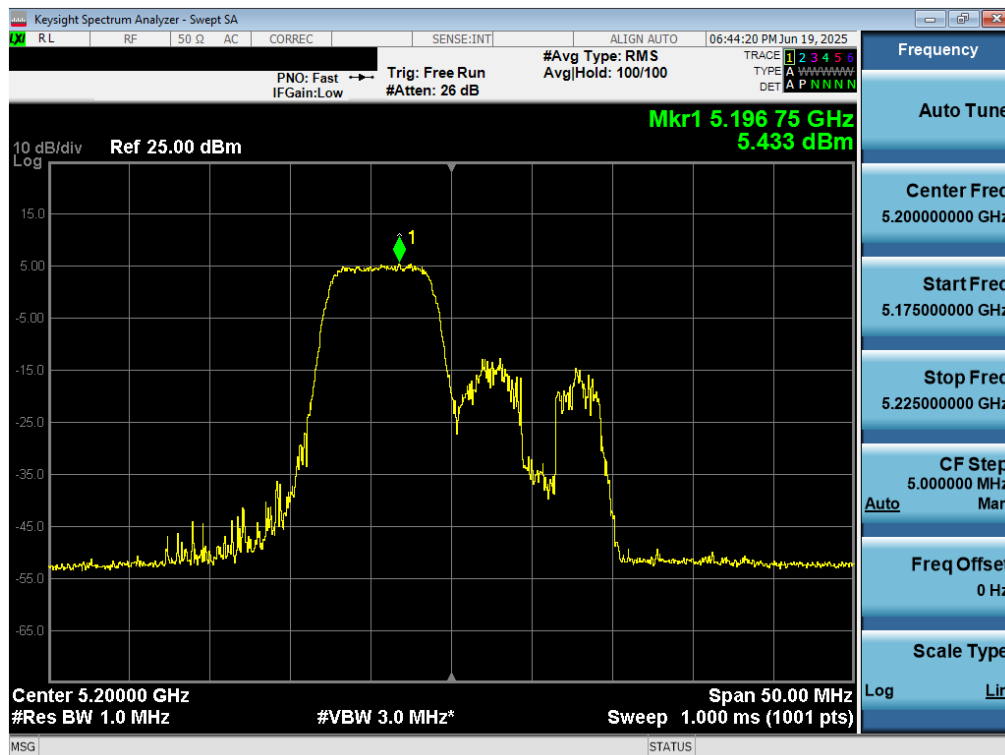


Plot 7-114. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11be – 106+26 Tones (UNII Band 1) – Ch. 40)

|                                         |                                        |                              |                                   |
|-----------------------------------------|----------------------------------------|------------------------------|-----------------------------------|
| FCC ID: A3LSMX930<br>IC: 649E-SMX930    | MEASUREMENT REPORT                     |                              | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2505130048-06.A3L | Test Dates:<br>05/13/2025 - 07/18/2025 | EUT Type:<br>Portable Tablet | Page 97 of 146                    |

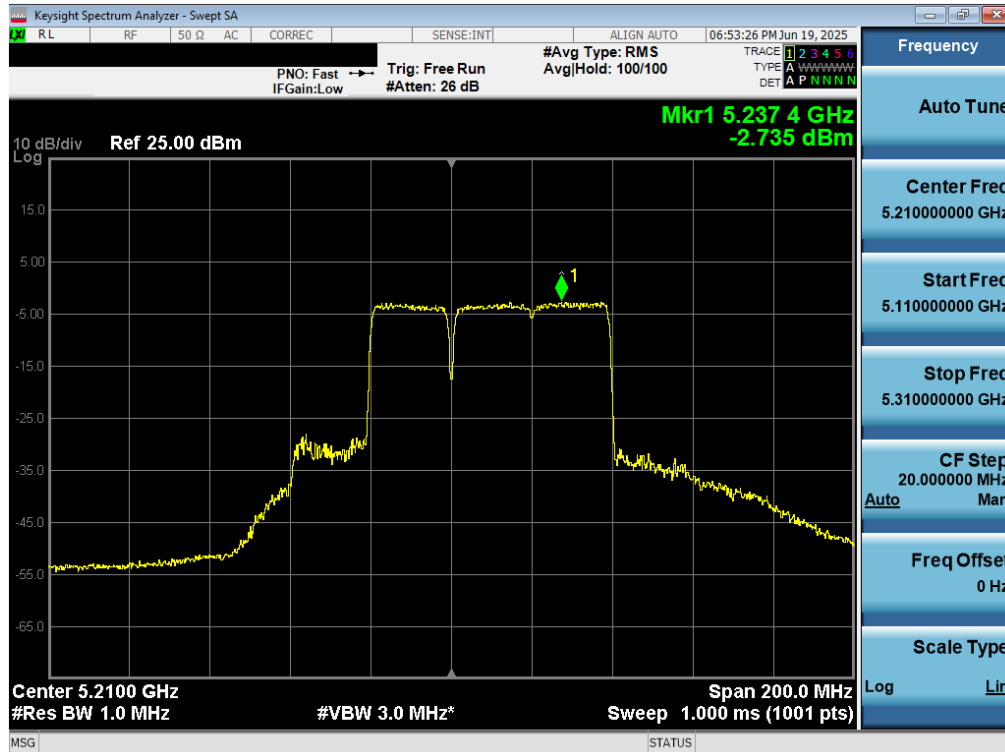


Plot 7-115. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11be – 484+242 Tones (UNII Band 1) – Ch. 42)

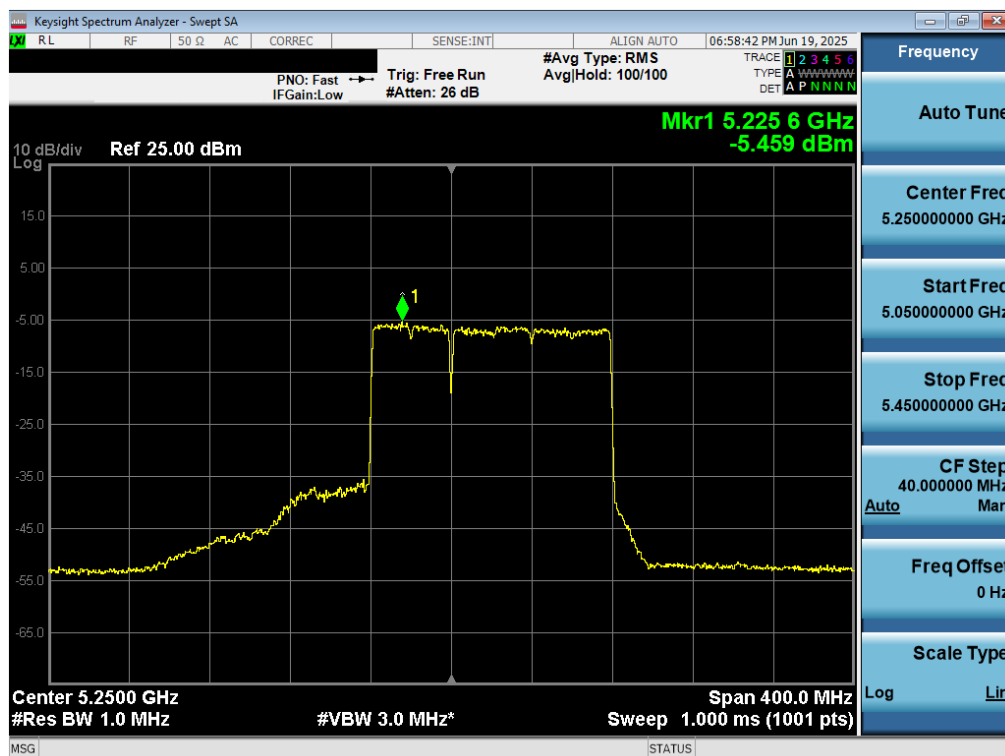


Plot 7-116. Power Spectral Density Plot MIMO ANT2 (160MHz BW 802.11be – 996+484 Tones (UNII Band 1/2A) – Ch. 50)

|                                         |                                        |                              |                                   |
|-----------------------------------------|----------------------------------------|------------------------------|-----------------------------------|
| FCC ID: A3LSMX930<br>IC: 649E-SMX930    | MEASUREMENT REPORT                     |                              | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2505130048-06.A3L | Test Dates:<br>05/13/2025 - 07/18/2025 | EUT Type:<br>Portable Tablet | Page 98 of 146                    |

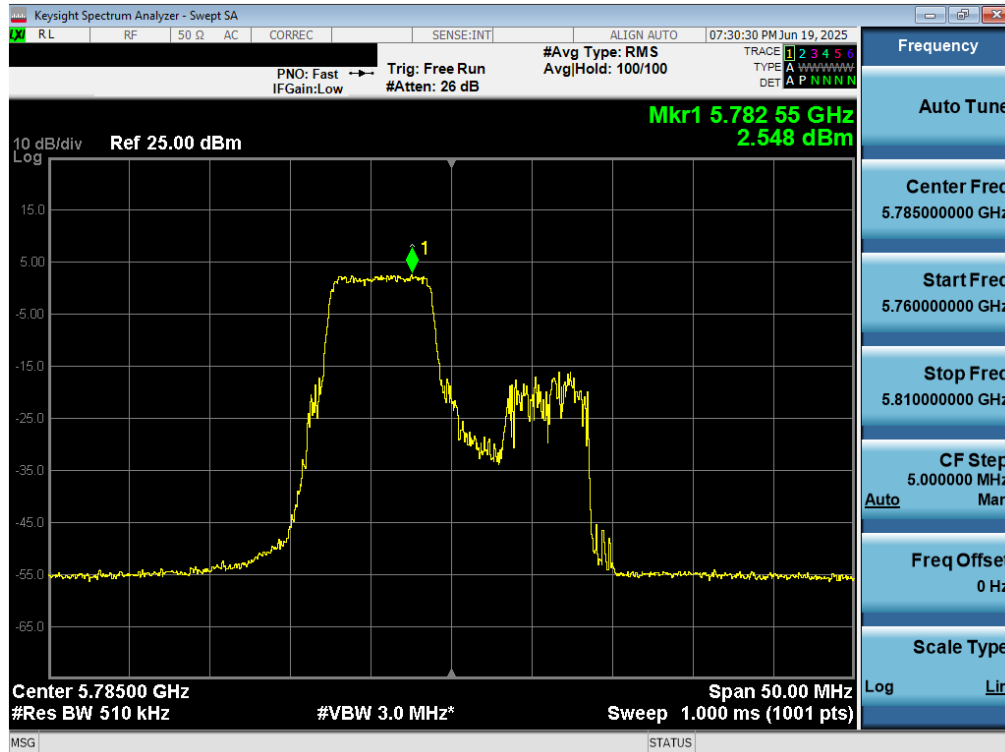


Plot 7-117. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11be – 106+26 Tones (UNII Band 3) – Ch. 157)

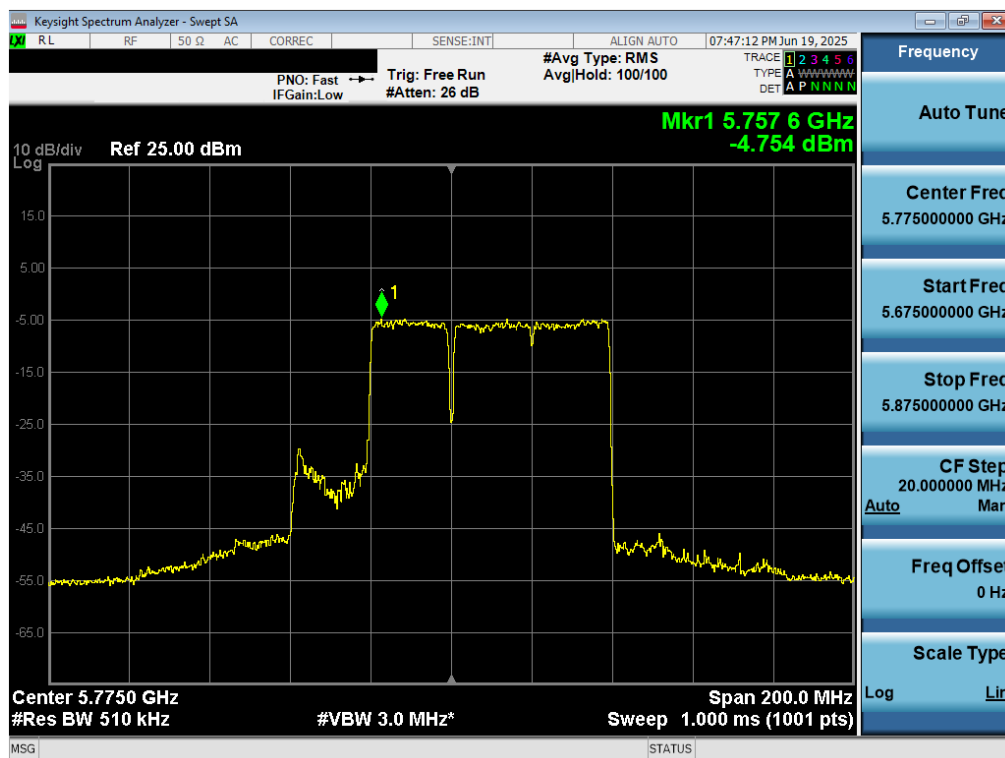


Plot 7-118. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11be – 484+242 Tones (UNII Band 3) – Ch. 173)

|                                         |                                        |                              |                                   |
|-----------------------------------------|----------------------------------------|------------------------------|-----------------------------------|
| FCC ID: A3LSMX930<br>IC: 649E-SMX930    | MEASUREMENT REPORT                     |                              | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2505130048-06.A3L | Test Dates:<br>05/13/2025 - 07/18/2025 | EUT Type:<br>Portable Tablet | Page 99 of 146                    |

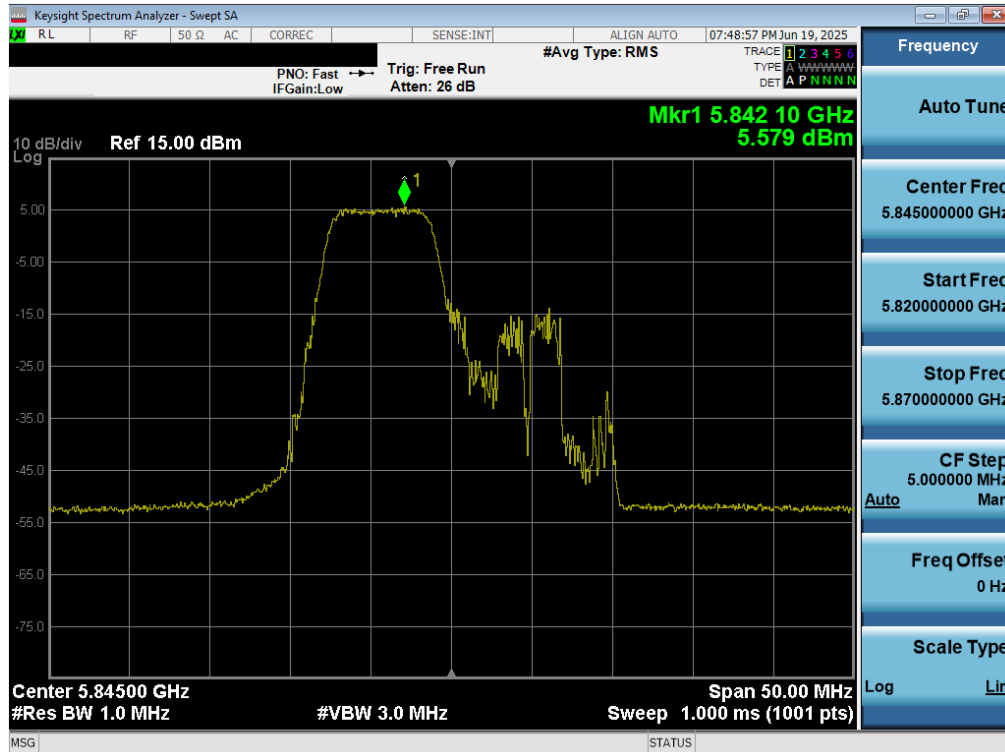

Plot 7-119. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11be – 106+26 Tones (UNII Band 4) – Ch. 173)

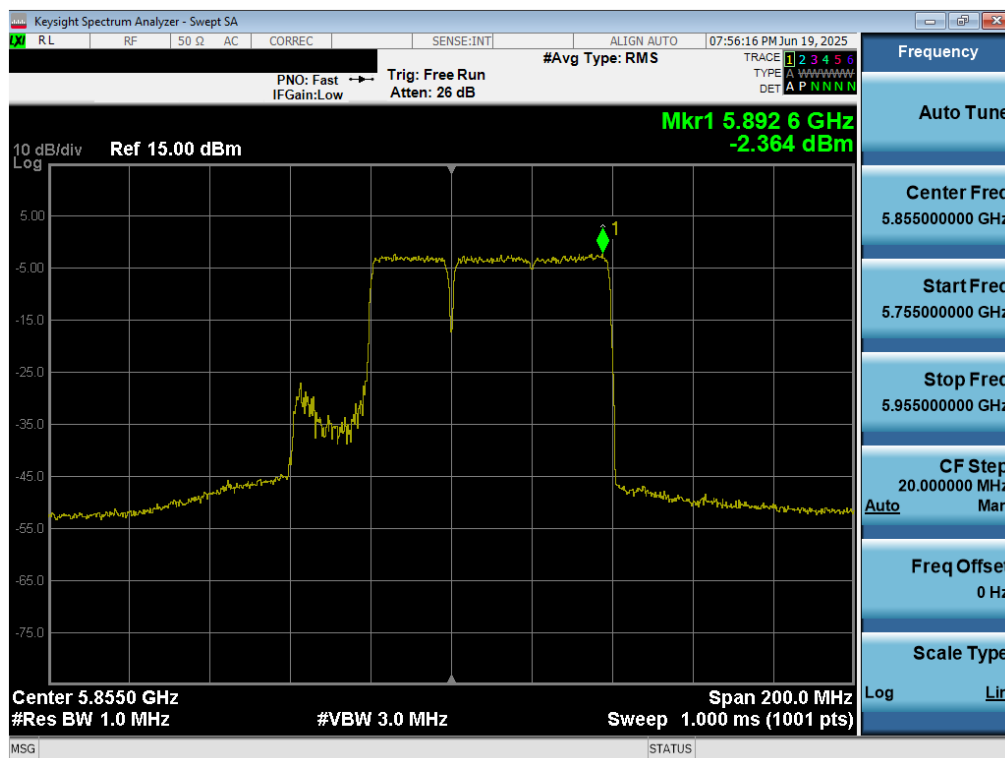

Plot 7-120. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11be – 484+242 Tones (UNII Band 3/4) – Ch. 171)

|                                         |                                        |                              |                                   |
|-----------------------------------------|----------------------------------------|------------------------------|-----------------------------------|
| FCC ID: A3LSMX930<br>IC: 649E-SMX930    | MEASUREMENT REPORT                     |                              | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2505130048-06.A3L | Test Dates:<br>05/13/2025 - 07/18/2025 | EUT Type:<br>Portable Tablet | Page 100 of 146                   |



**Note:**

Per ANSI C63.10:2020 Section 14.5.2.2, the power spectral density at Antenna-1 and Antenna-2 were first measured separately with reduced Antenna-1 and Antenna-2 powers per manufacture's tune-up document. The measured values were then summed in linear power units then converted back to dBm.

**Sample Directional Gain Calculation:**

Assuming the antenna gain is -8.61 dBi for Antenna-1 and -7.68 dBi for Antenna-2.

$$\begin{aligned} \text{Directional gain} &= 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{\text{ANT}}] \text{ dBi} \\ &= 10 \log[(10^{-8.61/20} + 10^{-7.68/20} / 2] \text{ dBi} \\ &= (-5.12) \text{ dBi} \end{aligned}$$

**Sample MIMO Calculation:**

Assuming the average conducted power spectral density was measured to be 5.88 dBm for Antenna-1 and 6.27 dBm for Antenna-2.

$$\text{Antenna-1} + \text{Antenna-2} = \text{MIMO}$$

$$(5.88 \text{ dBm} + 6.27 \text{ dBm}) = (3.87 \text{ mW} + 4.24 \text{ mW}) = 8.11 \text{ mW} = 9.09 \text{ dBm}$$

**Sample e.i.r.p Power Spectral Density Calculation:**

Assuming the average MIMO power density was calculated to be 9.09 dBm with directional gain of -5.12 dBi.

$$\text{e.i.r.p. Power Spectral Density(dBm)} = \text{Power Spectral Density (dBm)} + \text{directional gain (dBi)}$$

$$9.09 \text{ dBm} + (-5.12) \text{ dBi} = 3.97 \text{ dBm}$$

|                                                    |                                               |                                     |                                          |
|----------------------------------------------------|-----------------------------------------------|-------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMX930<br><b>IC:</b> 649E-SMX930 | <b>MEASUREMENT REPORT</b>                     |                                     | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2505130048-06.A3L     | <b>Test Dates:</b><br>05/13/2025 - 07/18/2025 | <b>EUT Type:</b><br>Portable Tablet | Page 102 of 146                          |

## 7.6 Radiated Emission Measurements

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10:2020, and at the appropriate frequencies. All channels, modes, and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst-case emissions are reported in this section.

**For transmitters operating in the 5.15-5.25 GHz and 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.**

**For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.**

**For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.**

**For transmitters operating in the 5.850 – 5.895 GHz band: all emissions at or above 5.895GHz shall not exceed an e.i.r.p. of -5dBm/MHz and shall decrease linearly up to an e.i.r.p. of -27dBm/MHz at or above 5.925GHz, and all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27dBm/MHz at 5.65 GHz increasing linearly to 10dBm/MHz at 5.7GHz and from 5.7GHz increasing linearly to a level of 15.6dBm/MHz at 5.72GHz, and from 5.72GHz increasing linearly to a level of 27dBm/MHz at 5.725GHz.**

**All out of band emissions appearing in a restricted band as specified in FCC §15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in the table below per FCC §15.209 and RSS-Gen (8.9).**

| Frequency         | Field Strength<br>[μV/m] | Measured Distance<br>[Meters] |
|-------------------|--------------------------|-------------------------------|
| 0.009 – 0.490 MHz | 2400\√F (kHz)            | 300                           |
| 0.490 – 1.705 MHz | 24000\√F (kHz)           | 30                            |
| 1.705 – 30.00 MHz | 30                       | 30                            |
| 30.00 – 88.00 MHz | 100                      | 3                             |
| 88.00 – 216.0 MHz | 150                      | 3                             |
| 216.0 – 960.0 MHz | 200                      | 3                             |
| Above 960.0 MHz   | 500                      | 3                             |

**Table 7-34. Radiated Limits**

### Test Procedures Used

ANSI C63.10:2020 – Sections 12.7.7.2, 12.7.6, 12.7.5 (Radiated Spurious Emissions)

ANSI C63.10:2020 – Section 12.7.4.4 (Band Edge Measurements)

|                                         |                                        |                              |                                   |
|-----------------------------------------|----------------------------------------|------------------------------|-----------------------------------|
| FCC ID: A3LSMX930<br>IC: 649E-SMX930    | MEASUREMENT REPORT                     |                              | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2505130048-06.A3L | Test Dates:<br>05/13/2025 - 07/18/2025 | EUT Type:<br>Portable Tablet | Page 103 of 146                   |

## **Test Settings – Above 1GHz**

### **Average Field Strength Measurements (Method AD – Average Detection)**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be  $\geq 2 \times \text{span} \backslash \text{RBW}$ )
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces.

### **Peak Field Strength Measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize.

## **Test Settings – Below 1GHz**

### **Quasi-Peak Field Strength Measurements**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize.

## **Test Setup**


The EUT and measurement equipment were set up as shown in the diagram below.

|                                                    |                                               |                                     |                                          |
|----------------------------------------------------|-----------------------------------------------|-------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMX930<br><b>IC:</b> 649E-SMX930 | <b>MEASUREMENT REPORT</b>                     |                                     | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2505130048-06.A3L     | <b>Test Dates:</b><br>05/13/2025 - 07/18/2025 | <b>EUT Type:</b><br>Portable Tablet | Page 104 of 146                          |



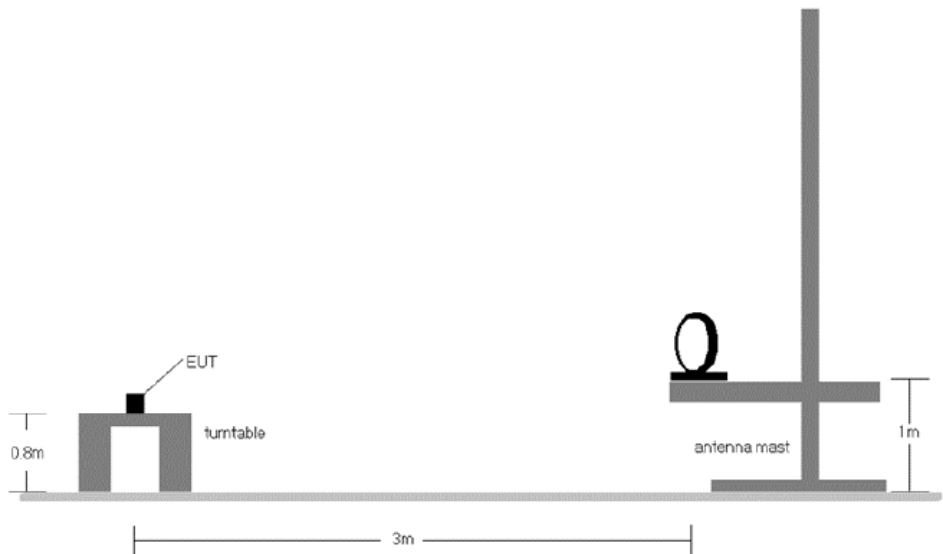


**Figure 7-5. Radiated Test Setup < 30MHz**

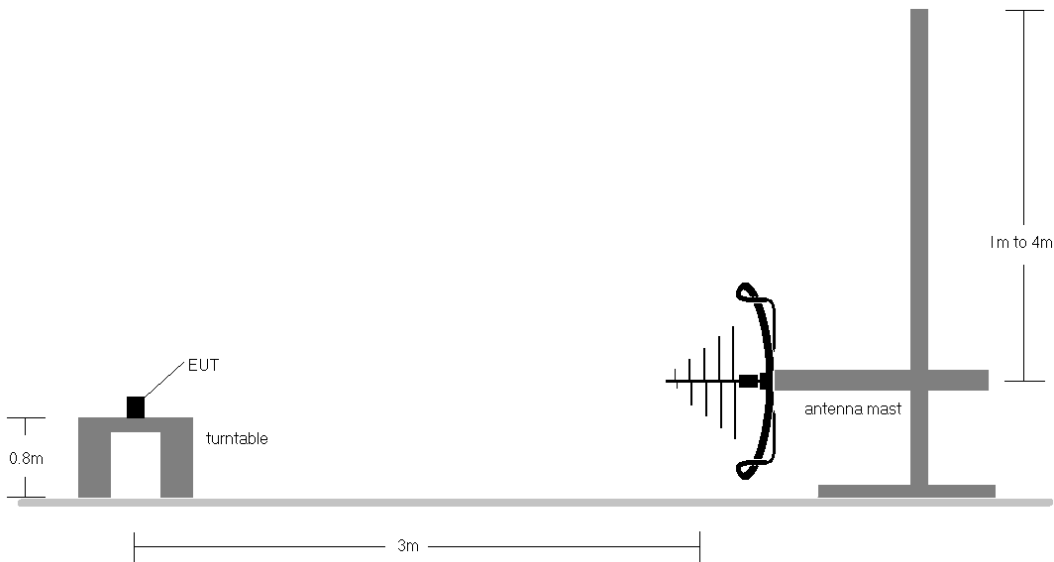

**Figure 7-6. Radiated Test Setup < 1GHz**

|                                                    |                                               |                                     |                                          |
|----------------------------------------------------|-----------------------------------------------|-------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMX930<br><b>IC:</b> 649E-SMX930 | <b>MEASUREMENT REPORT</b>                     |                                     | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2505130048-06.A3L     | <b>Test Dates:</b><br>05/13/2025 - 07/18/2025 | <b>EUT Type:</b><br>Portable Tablet | Page 105 of 146                          |

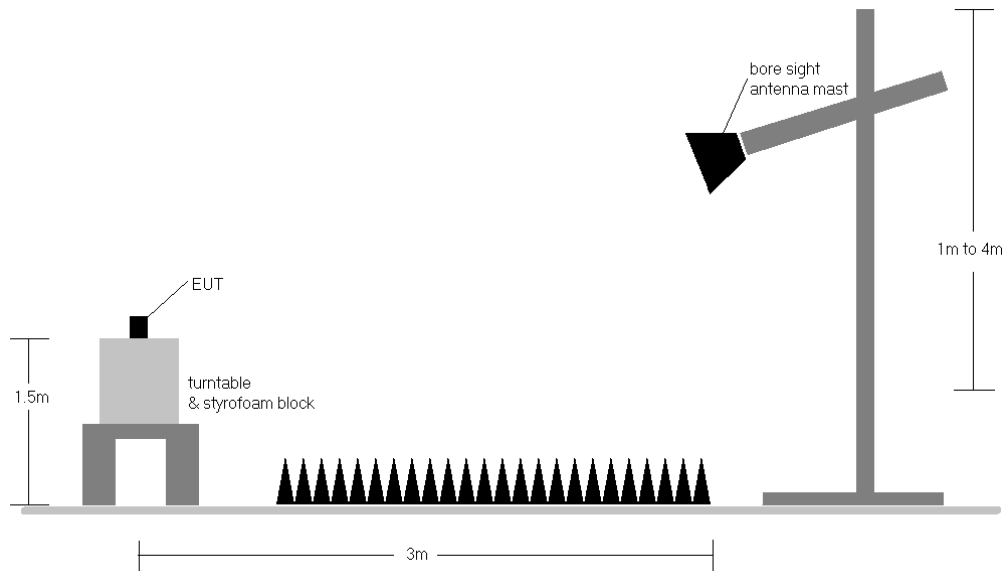

**Figure 7-7. Radiated Test Setup > 1GHz**

|                                                    |                                               |                                     |                                          |
|----------------------------------------------------|-----------------------------------------------|-------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMX930<br><b>IC:</b> 649E-SMX930 | <b>MEASUREMENT REPORT</b>                     |                                     | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2505130048-06.A3L     | <b>Test Dates:</b><br>05/13/2025 - 07/18/2025 | <b>EUT Type:</b><br>Portable Tablet | Page 106 of 146                          |

## Test Notes

1. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in §15.209. All spurious emissions that do not lie in a restricted band are subject to an average limit of -27dBm/MHz. At 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB $\mu$ V/m.
2. All spurious emissions that do not lie in a restricted band are subject to a peak limit not to exceed 20dB of the average limit [68.2dB $\mu$ V/m]. If a peak measurement passes the average limit, it was determined no further investigation is necessary.
3. The antenna is manipulated through typical positions, polarity, and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported, however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions below 18GHz were measured at a 3-meter test distance while emissions above 18GHz were measured at a 1-meter test distance with the application of a distance correction factor.
6. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
7. The “-” shown in the following RSE tables are used to denote a noise floor measurement.
8. In the case where a peak-detector measurement passed the given RMS limit it was determined sufficient to demonstrate compliance.
9. The results recorded using the broadband antenna are known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
10. For radiated measurements, emissions were investigated for the fully-loaded RU configuration and for all of the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.

## Sample Calculations

### Determining Spurious Emissions Levels

- Field Strength Level [dB $\mu$ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB]
- Margin [dB] = Field Strength Level [dB $\mu$ V/m] – Limit [dB $\mu$ V/m]


### Radiated Band Edge Measurement Offset

|                                         |                                        |                              |                                   |
|-----------------------------------------|----------------------------------------|------------------------------|-----------------------------------|
| FCC ID: A3LSMX930<br>IC: 649E-SMX930    | MEASUREMENT REPORT                     |                              | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2505130048-06.A3L | Test Dates:<br>05/13/2025 - 07/18/2025 | EUT Type:<br>Portable Tablet | Page 107 of 146                   |


- The amplitude offset shown in the radiated restricted band edge plots in Section Radiated Spurious Emission Measurements – Above 1GHz was calculated using the formula:  
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

|                                                    |                                               |                                     |                                          |
|----------------------------------------------------|-----------------------------------------------|-------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMX930<br><b>IC:</b> 649E-SMX930 | <b>MEASUREMENT REPORT</b>                     |                                     | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2505130048-06.A3L     | <b>Test Dates:</b><br>05/13/2025 - 07/18/2025 | <b>EUT Type:</b><br>Portable Tablet | Page 108 of 146                          |


## 7.6.1 MIMO Radiated Spurious Emission Measurements (26 Tones)

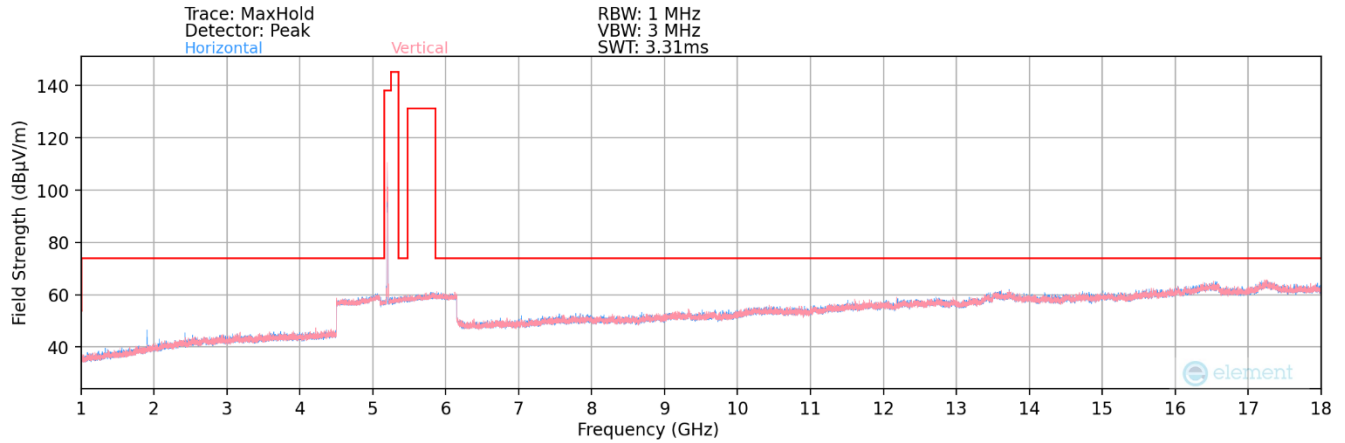

Plot 7-122. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII 1 Ch. 40)

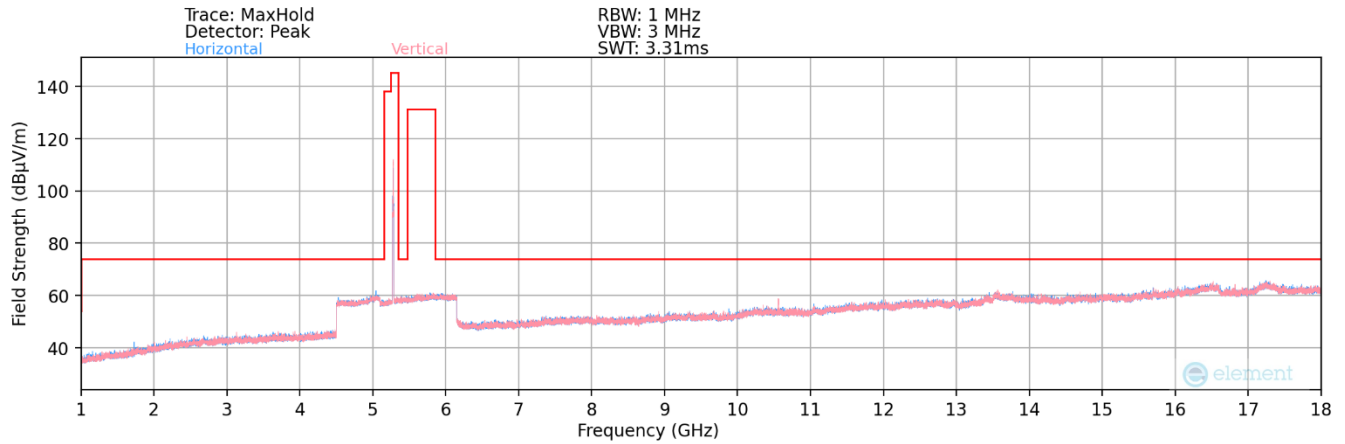


Plot 7-123. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII 2A Ch. 56)

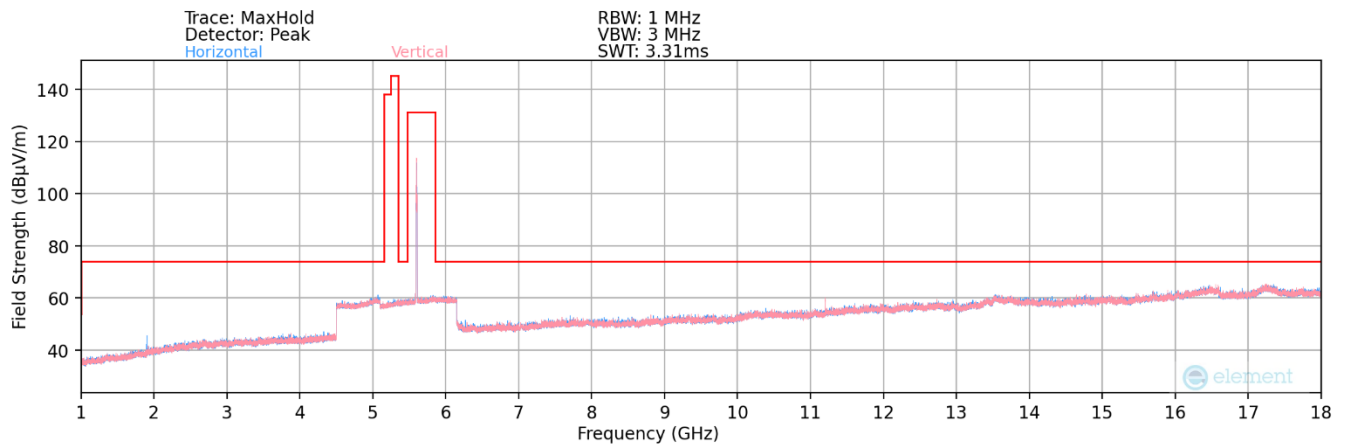


Plot 7-124. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII 2C Ch. 120)


|                                         |                                        |                              |                                   |
|-----------------------------------------|----------------------------------------|------------------------------|-----------------------------------|
| FCC ID: A3LSMX930<br>IC: 649E-SMX930    | MEASUREMENT REPORT                     |                              | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2505130048-06.A3L | Test Dates:<br>05/13/2025 - 07/18/2025 | EUT Type:<br>Portable Tablet | Page 109 of 146                   |

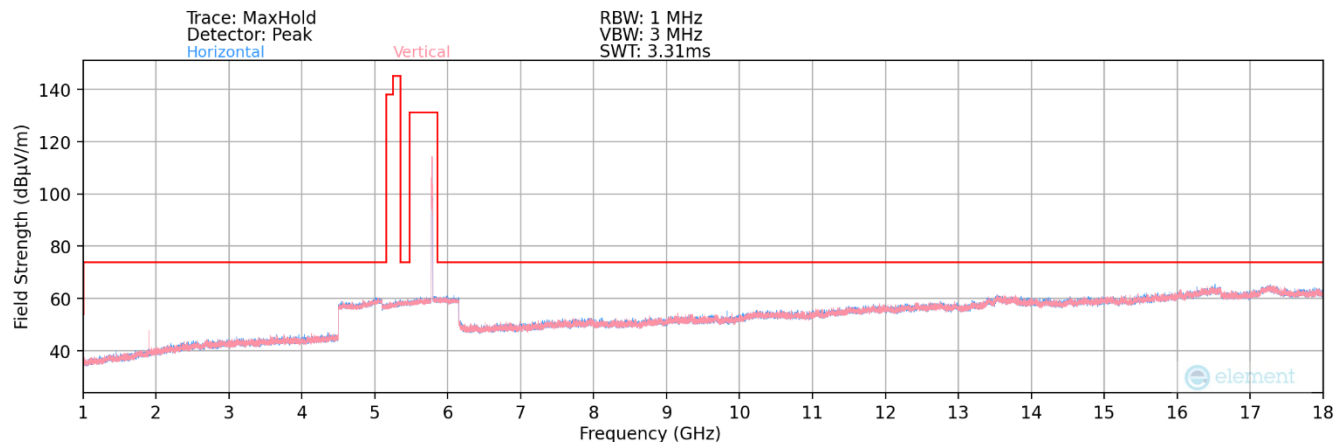

**Plot 7-125. Radiated Spurious Plot above 1GHz MIMO (802.11ax –UNII 3 Ch. 157)**

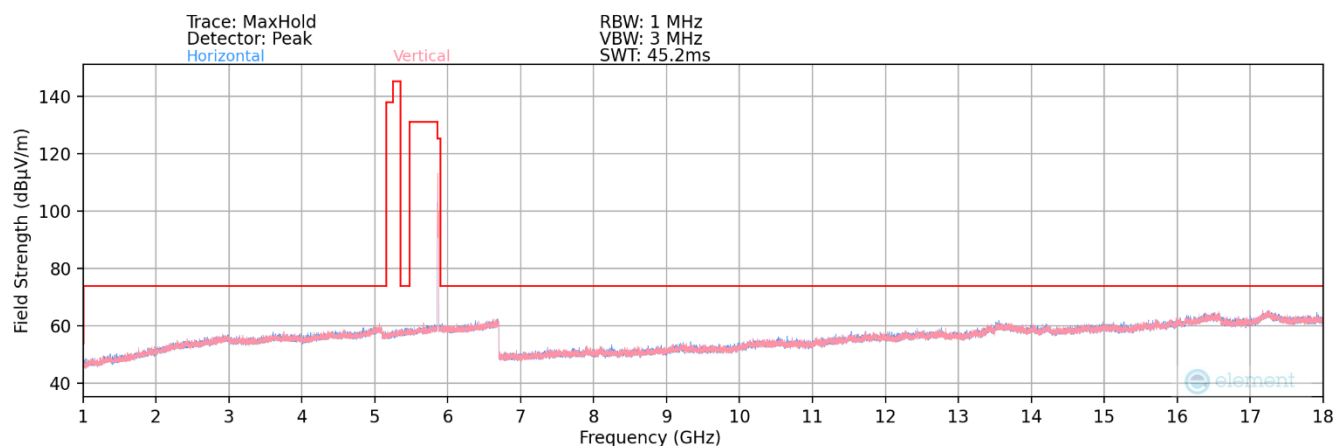


**Plot 7-126. Radiated Spurious Plot above 1GHz MIMO (802.11ax –UNII 4 Ch. 173)**

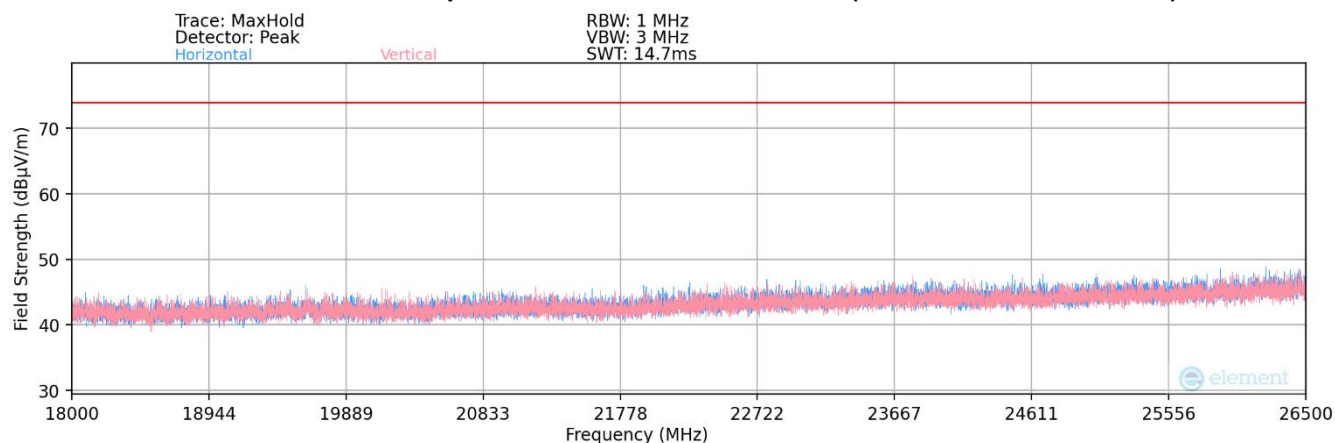

**Plot 7-127. Radiated Spurious Plot 18GHz - 26.5GHz (802.11ax)**

|                                         |                                        |                              |                                   |
|-----------------------------------------|----------------------------------------|------------------------------|-----------------------------------|
| FCC ID: A3LSMX930<br>IC: 649E-SMX930    | MEASUREMENT REPORT                     |                              | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2505130048-06.A3L | Test Dates:<br>05/13/2025 - 07/18/2025 | EUT Type:<br>Portable Tablet | Page 110 of 146                   |

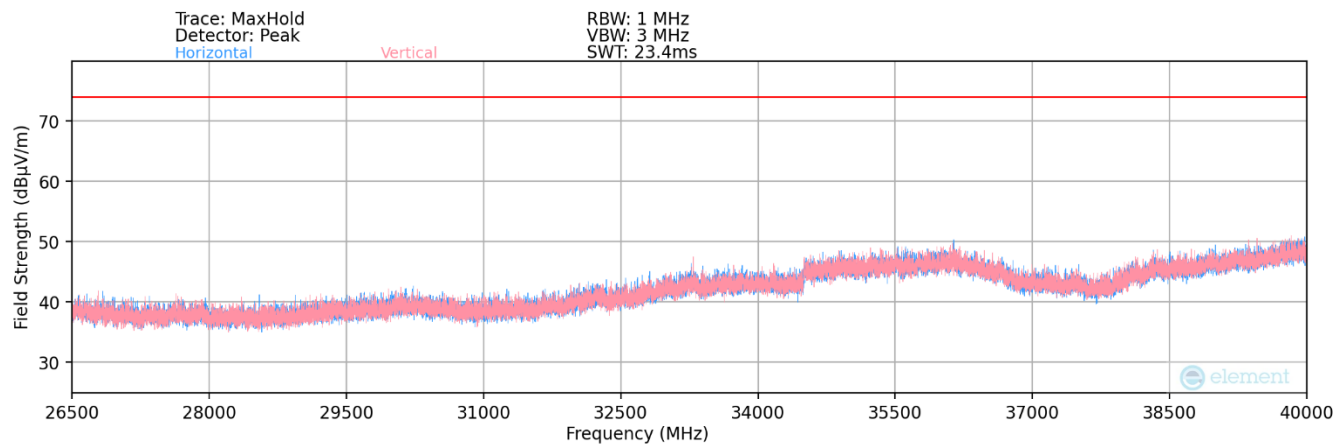

**Plot 7-128. Radiated Spurious Plot 26.5GHz - 40GHz (802.11ax)**

|                                                    |                                               |                                     |                                          |
|----------------------------------------------------|-----------------------------------------------|-------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMX930<br><b>IC:</b> 649E-SMX930 | <b>MEASUREMENT REPORT</b>                     |                                     | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2505130048-06.A3L     | <b>Test Dates:</b><br>05/13/2025 - 07/18/2025 | <b>EUT Type:</b><br>Portable Tablet | Page 111 of 146                          |

## MIMO Radiated Spurious Emission Measurements (26 Tones) –UNII 1

| Mode               | Antenna | UNII Band | Channel | Test Channel Freq. [MHz] | RU Index | Restricted | Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|--------------------|---------|-----------|---------|--------------------------|----------|------------|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 802.11ax<br>RU 26T | MIMO    | 1         | 36      | 5180                     | 4        |            | 10360.00        | Peak     | H               | -                   | -                          | -69.30               | 12.04       | 0.00                            | 49.74                   | 68.20          | -18.46      |
|                    |         |           |         |                          |          | *          | 15540.00        | Average  | H               | -                   | -                          | -81.66               | 14.08       | 0.00                            | 39.42                   | 53.98          | -14.56      |
|                    |         |           |         |                          |          | *          | 15540.00        | Peak     | H               | -                   | -                          | -69.86               | 14.08       | 0.00                            | 51.22                   | 73.98          | -22.76      |
|                    |         |           |         |                          |          | *          | 20720.00        | Average  | H               | -                   | -                          | -62.76               | 2.48        | -9.54                           | 37.18                   | 53.98          | -16.80      |
|                    |         |           |         |                          |          | *          | 20720.00        | Peak     | H               | -                   | -                          | -55.40               | 2.48        | -9.54                           | 44.54                   | 73.98          | -29.44      |
|                    |         |           |         |                          |          |            | 25900.00        | Peak     | H               | -                   | -                          | -55.12               | 4.78        | -9.54                           | 47.12                   | 68.20          | -21.08      |
|                    |         |           | 40      | 5200                     | 4        |            | 10400.00        | Peak     | H               | -                   | -                          | -69.85               | 12.45       | 0.00                            | 49.60                   | 68.20          | -18.60      |
|                    |         |           |         |                          |          | *          | 15600.00        | Average  | H               | -                   | -                          | -81.97               | 14.12       | 0.00                            | 39.15                   | 53.98          | -14.83      |
|                    |         |           |         |                          |          | *          | 15600.00        | Peak     | H               | -                   | -                          | -70.31               | 14.12       | 0.00                            | 50.81                   | 73.98          | -23.17      |
|                    |         |           |         |                          |          | *          | 20800.00        | Average  | H               | -                   | -                          | -63.35               | 2.52        | -9.54                           | 36.63                   | 53.98          | -17.35      |
|                    |         |           |         |                          |          | *          | 20800.00        | Peak     | H               | -                   | -                          | -55.91               | 2.52        | -9.54                           | 44.07                   | 73.98          | -29.91      |
|                    |         |           |         |                          |          |            | 26000.00        | Peak     | H               | -                   | -                          | -55.22               | 4.78        | -9.54                           | 47.02                   | 68.20          | -21.18      |
|                    |         |           | 48      | 5240                     | 4        |            | 10480.00        | Peak     | H               | -                   | -                          | -69.89               | 13.04       | 0.00                            | 50.15                   | 68.20          | -18.05      |
|                    |         |           |         |                          |          | *          | 15720.00        | Average  | H               | -                   | -                          | -82.08               | 14.52       | -9.54                           | 29.90                   | 53.98          | -24.08      |
|                    |         |           |         |                          |          | *          | 15720.00        | Peak     | H               | -                   | -                          | -70.02               | 14.52       | -9.54                           | 41.96                   | 73.98          | -32.02      |
|                    |         |           |         |                          |          |            | 20960.00        | Peak     | H               | -                   | -                          | -55.41               | 2.84        | -9.54                           | 44.89                   | 68.20          | -23.31      |
|                    |         |           |         |                          |          |            | 26200.00        | Peak     | H               | -                   | -                          | -55.08               | 4.91        | -9.54                           | 47.29                   | 68.20          | -20.91      |

**Table 7-35. Radiated Measurements MIMO (26 Tones)**

|                                                    |                                               |                                     |                                          |
|----------------------------------------------------|-----------------------------------------------|-------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMX930<br><b>IC:</b> 649E-SMX930 | <b>MEASUREMENT REPORT</b>                     |                                     | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2505130048-06.A3L     | <b>Test Dates:</b><br>05/13/2025 - 07/18/2025 | <b>EUT Type:</b><br>Portable Tablet | Page 112 of 146                          |



## MIMO Radiated Spurious Emission Measurements (26 Tones) – UNII 2A

| Mode               | Antenna | UNII Band | Channel | Test Channel Freq. [MHz] | RU Index | Restricted | Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|--------------------|---------|-----------|---------|--------------------------|----------|------------|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 802.11ax<br>RU 26T | MIMO    | 2A        | 52      | 5260                     | 4        |            | 10520.00        | Peak     | H               | 316                 | 191                        | -68.06               | 13.01       | 0.00                            | 51.95                   | 68.20          | -16.25      |
|                    |         |           |         |                          |          | *          | 15780.00        | Average  | H               | -                   | -                          | -82.16               | 14.41       | 0.00                            | 39.25                   | 53.98          | -14.73      |
|                    |         |           |         |                          |          | *          | 15780.00        | Peak     | H               | -                   | -                          | -70.43               | 14.41       | 0.00                            | 50.98                   | 73.98          | -23.00      |
|                    |         |           |         |                          |          | *          | 21040.00        | Average  | H               | -                   | -                          | -63.84               | 2.92        | -9.54                           | 36.55                   | 53.98          | -17.43      |
|                    |         |           |         |                          |          | *          | 21040.00        | Peak     | H               | -                   | -                          | -55.18               | 2.92        | -9.54                           | 45.21                   | 73.98          | -28.77      |
|                    |         |           |         |                          |          |            | 26300.00        | Peak     | H               | -                   | -                          | -54.61               | 4.91        | -9.54                           | 47.76                   | 68.20          | -20.44      |
|                    |         |           | 56      | 5280                     | 4        |            | 10560.00        | Peak     | H               | 359                 | 307                        | -68.38               | 12.82       | 0.00                            | 51.44                   | 68.20          | -16.76      |
|                    |         |           |         |                          |          | *          | 15840.00        | Average  | H               | -                   | -                          | -81.61               | 14.10       | 0.00                            | 39.49                   | 53.98          | -14.49      |
|                    |         |           |         |                          |          | *          | 15840.00        | Peak     | H               | -                   | -                          | -69.92               | 14.10       | 0.00                            | 51.18                   | 73.98          | -22.80      |
|                    |         |           |         |                          |          | *          | 21120.00        | Average  | H               | -                   | -                          | -63.60               | 2.87        | -9.54                           | 36.73                   | 53.98          | -17.25      |
|                    |         |           |         |                          |          | *          | 21120.00        | Peak     | H               | -                   | -                          | -55.76               | 2.87        | -9.54                           | 44.57                   | 73.98          | -29.41      |
|                    |         |           |         |                          |          |            | 26400.00        | Peak     | H               | -                   | -                          | -54.87               | 4.85        | -9.54                           | 47.45                   | 68.20          | -20.75      |
|                    |         |           | 64      | 5320                     | 4        | *          | 10640.00        | Average  | H               | 172                 | 297                        | -79.30               | 12.81       | 0.00                            | 40.51                   | 53.98          | -13.47      |
|                    |         |           |         |                          |          | *          | 10640.00        | Peak     | H               | 172                 | 297                        | -66.48               | 12.81       | 0.00                            | 53.33                   | 73.98          | -20.65      |
|                    |         |           |         |                          |          | *          | 15960.00        | Average  | H               | -                   | -                          | -82.18               | 15.15       | 0.00                            | 39.97                   | 53.98          | -14.01      |
|                    |         |           |         |                          |          | *          | 15960.00        | Peak     | H               | -                   | -                          | -70.95               | 15.15       | 0.00                            | 51.20                   | 73.98          | -22.78      |
|                    |         |           |         |                          |          | *          | 21280.00        | Average  | H               | -                   | -                          | -64.05               | 2.96        | -9.54                           | 36.38                   | 53.98          | -17.60      |
|                    |         |           |         |                          |          | *          | 21280.00        | Peak     | H               | -                   | -                          | -55.41               | 2.96        | -9.54                           | 45.02                   | 73.98          | -28.96      |
|                    |         |           |         |                          |          |            | 26600.00        | Peak     | H               | -                   | -                          | -54.80               | 5.05        | -9.54                           | 47.71                   | 68.20          | -20.49      |

**Table 7-36. Radiated Measurements MIMO (26 Tones)**

|                                                    |                                               |                                     |                                          |
|----------------------------------------------------|-----------------------------------------------|-------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMX930<br><b>IC:</b> 649E-SMX930 | <b>MEASUREMENT REPORT</b>                     |                                     | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2505130048-06.A3L     | <b>Test Dates:</b><br>05/13/2025 - 07/18/2025 | <b>EUT Type:</b><br>Portable Tablet | Page 113 of 146                          |

## MIMO Radiated Spurious Emission Measurements (26 Tones) – UNII 2C

| Mode               | Antenna | UNII Band | Channel | Test Channel Freq. [MHz] | RU Index | Restricted | Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|--------------------|---------|-----------|---------|--------------------------|----------|------------|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 802.11ax<br>RU 26T | MIMO    | 2C        | 100     | 5500                     | 4        | *          | 11000.00        | Average  | H               | 179                 | 234                        | -76.36               | 12.47       | 0.00                            | 43.11                   | 53.98          | -10.87      |
|                    |         |           |         |                          |          | *          | 11000.00        | Peak     | H               | 179                 | 234                        | -63.55               | 12.47       | 0.00                            | 55.92                   | 73.98          | -18.06      |
|                    |         |           |         |                          |          |            | 16500.00        | Peak     | H               | -                   | -                          | -69.36               | 15.62       | -9.54                           | 43.72                   | 68.20          | -24.48      |
|                    |         |           |         |                          |          |            | 22000.00        | Peak     | H               | -                   | -                          | -54.76               | 3.01        | -9.54                           | 45.71                   | 68.20          | -22.49      |
|                    |         |           |         |                          |          |            | 27500.00        | Peak     | H               | -                   | -                          | -54.57               | 5.00        | -9.54                           | 47.89                   | 68.20          | -20.31      |
|                    |         |           | 120     | 5600                     | 4        | *          | 11200.00        | Average  | H               | 277                 | 235                        | -80.23               | 12.60       | 0.00                            | 39.37                   | 53.98          | -14.61      |
|                    |         |           |         |                          |          | *          | 11200.00        | Peak     | H               | 277                 | 235                        | -67.91               | 12.60       | 0.00                            | 51.69                   | 73.98          | -22.29      |
|                    |         |           |         |                          |          |            | 16800.00        | Peak     | H               | -                   | -                          | -69.72               | 16.11       | 0.00                            | 53.39                   | 68.20          | -14.81      |
|                    |         |           |         |                          |          | *          | 22400.00        | Average  | H               | -                   | -                          | -63.50               | 3.44        | -9.54                           | 37.40                   | 53.98          | -16.58      |
|                    |         |           |         |                          |          | *          | 22400.00        | Peak     | H               | -                   | -                          | -55.95               | 3.44        | -9.54                           | 44.95                   | 73.98          | -29.03      |
|                    |         |           |         |                          |          |            | 28000.00        | Peak     | H               | -                   | -                          | -53.86               | 5.31        | -9.54                           | 48.91                   | 68.20          | -19.29      |
|                    |         |           | 144     | 5720                     | 4        | *          | 11440.00        | Average  | H               | -                   | -                          | -81.90               | 13.48       | 0.00                            | 38.58                   | 53.98          | -15.40      |
|                    |         |           |         |                          |          | *          | 11440.00        | Peak     | H               | -                   | -                          | -70.15               | 13.48       | 0.00                            | 50.33                   | 73.98          | -23.65      |
|                    |         |           |         |                          |          |            | 17160.00        | Peak     | H               | -                   | -                          | -70.09               | 16.71       | 0.00                            | 53.62                   | 68.20          | -14.58      |
|                    |         |           |         |                          |          | *          | 22880.00        | Average  | H               | -                   | -                          | -61.08               | 3.60        | -9.54                           | 39.98                   | 53.98          | -14.00      |
|                    |         |           |         |                          |          | *          | 22880.00        | Peak     | H               | -                   | -                          | -55.58               | 3.60        | -9.54                           | 45.48                   | 73.98          | -28.50      |
|                    |         |           |         |                          |          |            | 28600.00        | Peak     | H               | -                   | -                          | -54.49               | 5.30        | -9.54                           | 48.27                   | 68.20          | -19.93      |

**Table 7-37. Radiated Measurements MIMO (26 Tones)**

|                                         |                                        |                              |                                   |
|-----------------------------------------|----------------------------------------|------------------------------|-----------------------------------|
| FCC ID: A3LSMX930<br>IC: 649E-SMX930    | MEASUREMENT REPORT                     |                              | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2505130048-06.A3L | Test Dates:<br>05/13/2025 - 07/18/2025 | EUT Type:<br>Portable Tablet | Page 114 of 146                   |

## MIMO Radiated Spurious Emission Measurements (26 Tones) –UNII 3

| Mode               | Antenna | UNII Band | Channel | Test Channel Freq. [MHz] | RU Index | Restricted | Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|--------------------|---------|-----------|---------|--------------------------|----------|------------|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 802.11ax<br>RU 26T | MIMO    | 3         | 149     | 5745                     | 4        | *          | 11490.00        | Average  | H               | -                   | -                          | -81.52               | 13.01       | 0.00                            | 38.49                   | 53.98          | -15.49      |
|                    |         |           |         |                          |          | *          | 11490.00        | Peak     | H               | -                   | -                          | -69.36               | 13.01       | 0.00                            | 50.65                   | 73.98          | -23.33      |
|                    |         |           |         |                          |          |            | 17235.00        | Peak     | H               | -                   | -                          | -69.67               | 16.91       | 0.00                            | 54.24                   | 68.20          | -13.96      |
|                    |         |           |         |                          |          | *          | 22980.00        | Average  | H               | -                   | -                          | -61.34               | 3.63        | -9.54                           | 39.75                   | 53.98          | -14.23      |
|                    |         |           |         |                          |          | *          | 22980.00        | Peak     | H               | -                   | -                          | -54.37               | 3.63        | -9.54                           | 46.71                   | 73.98          | -27.27      |
|                    |         |           |         |                          |          |            | 28725.00        | Peak     | H               | -                   | -                          | -55.99               | 5.24        | -9.54                           | 46.71                   | 68.20          | -21.49      |
|                    |         |           | 157     | 5785                     | 4        | *          | 11570.00        | Average  | H               | -                   | -                          | -81.32               | 13.03       | 0.00                            | 38.71                   | 53.98          | -15.27      |
|                    |         |           |         |                          |          | *          | 11570.00        | Peak     | H               | -                   | -                          | -69.75               | 13.03       | 0.00                            | 50.28                   | 73.98          | -23.70      |
|                    |         |           |         |                          |          |            | 17355.00        | Peak     | H               | -                   | -                          | -70.16               | 17.67       | 0.00                            | 54.51                   | 68.20          | -13.69      |
|                    |         |           |         |                          |          |            | 23140.00        | Peak     | H               | -                   | -                          | -54.01               | 3.75        | -9.54                           | 47.20                   | 68.20          | -21.00      |
|                    |         |           | 165     | 5825                     | 4        |            | 28925.00        | Peak     | H               | -                   | -                          | -55.47               | 5.12        | -9.54                           | 47.11                   | 68.20          | -21.09      |
|                    |         |           |         |                          |          | *          | 11650.00        | Average  | H               | -                   | -                          | -81.68               | 13.41       | 0.00                            | 38.73                   | 53.98          | -15.25      |
|                    |         |           |         |                          |          | *          | 11650.00        | Peak     | H               | -                   | -                          | -69.96               | 13.41       | 0.00                            | 50.45                   | 73.98          | -23.53      |
|                    |         |           |         |                          |          |            | 17475.00        | Peak     | H               | -                   | -                          | -70.01               | 16.84       | 0.00                            | 53.83                   | 68.20          | -14.37      |
|                    |         |           |         |                          |          |            | 23300.00        | Peak     | H               | -                   | -                          | -55.22               | 3.73        | -9.54                           | 45.97                   | 68.20          | -22.23      |
|                    |         |           |         |                          |          |            | 29125.00        | Peak     | H               | -                   | -                          | -54.65               | 5.23        | -9.54                           | 48.05                   | 68.20          | -20.15      |

**Table 7-38. Radiated Measurements MIMO (26 Tones)**

|                                                    |                                               |                                     |                                          |
|----------------------------------------------------|-----------------------------------------------|-------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMX930<br><b>IC:</b> 649E-SMX930 | <b>MEASUREMENT REPORT</b>                     |                                     | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2505130048-06.A3L     | <b>Test Dates:</b><br>05/13/2025 - 07/18/2025 | <b>EUT Type:</b><br>Portable Tablet | Page 115 of 146                          |


## MIMO Radiated Spurious Emission Measurements (26 Tones) –UNII 4

| Mode               | Antenna | UNII Band | Channel | Test Channel Freq. [MHz] | RU Index | Restricted | Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|--------------------|---------|-----------|---------|--------------------------|----------|------------|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 802.11ax<br>RU 26T | ANT1    | 4         | 169     | 5845                     | 4        | *          | 11690.00        | Average  | H               | 133                 | 177                        | -81.09               | 13.27       | 0.00                            | 39.18                   | 53.98          | -14.80      |
|                    |         |           |         |                          |          | *          | 11690.00        | Peak     | H               | 133                 | 177                        | -68.48               | 13.27       | 0.00                            | 51.79                   | 73.98          | -22.19      |
|                    |         |           |         |                          |          |            | 17535.00        | Peak     | H               | -                   | -                          | -70.40               | 17.37       | 0.00                            | 53.97                   | 68.20          | -14.23      |
|                    |         |           |         |                          |          |            | 23380.00        | Peak     | H               | -                   | -                          | -54.93               | 3.80        | -9.54                           | 46.33                   | 68.20          | -21.87      |
|                    |         |           |         |                          |          |            | 29225.00        | Peak     | H               | -                   | -                          | -54.23               | 5.22        | -9.54                           | 48.45                   | 68.20          | -19.75      |
|                    |         |           | 173     | 5865                     | 4        |            | 35070.00        | Peak     | H               | -                   | -                          | -53.29               | 9.52        | -9.54                           | 53.69                   | 68.20          | -14.51      |
|                    |         |           |         |                          |          | *          | 11730.00        | Average  | H               | 140                 | 77                         | -81.40               | 14.39       | 0.00                            | 39.99                   | 53.98          | -13.99      |
|                    |         |           |         |                          |          | *          | 11730.00        | Peak     | H               | 140                 | 77                         | -69.47               | 14.39       | 0.00                            | 51.92                   | 73.98          | -22.06      |
|                    |         |           |         |                          |          |            | 17595.00        | Peak     | H               | -                   | -                          | -70.06               | 17.00       | 0.00                            | 53.94                   | 68.20          | -14.26      |
|                    |         |           |         |                          |          |            | 23460.00        | Peak     | H               | -                   | -                          | -54.51               | 3.86        | -9.54                           | 46.81                   | 68.20          | -21.39      |
|                    |         |           | 177     | 5885                     | 4        |            | 29325.00        | Peak     | H               | -                   | -                          | -55.24               | 5.14        | -9.54                           | 47.37                   | 68.20          | -20.83      |
|                    |         |           |         |                          |          |            | 35190.00        | Peak     | H               | -                   | -                          | -54.51               | 9.61        | -9.54                           | 52.56                   | 68.20          | -15.64      |
|                    |         |           |         |                          |          | *          | 11770.00        | Average  | H               | -                   | -                          | -82.17               | 13.93       | 0.00                            | 38.76                   | 53.98          | -15.22      |
|                    |         |           |         |                          |          | *          | 11770.00        | Peak     | H               | -                   | -                          | -70.48               | 13.93       | 0.00                            | 50.45                   | 73.98          | -23.53      |
|                    |         |           |         |                          |          |            | 17655.00        | Peak     | H               | -                   | -                          | -69.90               | 16.89       | 0.00                            | 53.99                   | 68.20          | -14.21      |
|                    |         |           |         |                          |          |            | 23540.00        | Peak     | H               | -                   | -                          | -54.61               | 4.01        | -9.54                           | 46.86                   | 68.20          | -21.34      |
|                    |         |           |         |                          |          |            | 29425.00        | Peak     | H               | -                   | -                          | -54.79               | 5.11        | -9.54                           | 47.78                   | 68.20          | -20.42      |
|                    |         |           |         |                          |          |            | 35310.00        | Peak     | H               | -                   | -                          | -53.53               | 9.72        | -9.54                           | 53.65                   | 68.20          | -14.55      |


**Table 7-39. Radiated Measurements MIMO (26 Tones)**

|                                                    |                                               |                                     |                                          |
|----------------------------------------------------|-----------------------------------------------|-------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMX930<br><b>IC:</b> 649E-SMX930 | <b>MEASUREMENT REPORT</b>                     |                                     | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2505130048-06.A3L     | <b>Test Dates:</b><br>05/13/2025 - 07/18/2025 | <b>EUT Type:</b><br>Portable Tablet | Page 116 of 146                          |


## 7.6.2 MIMO Radiated Spurious Emission Measurements (242 Tones)

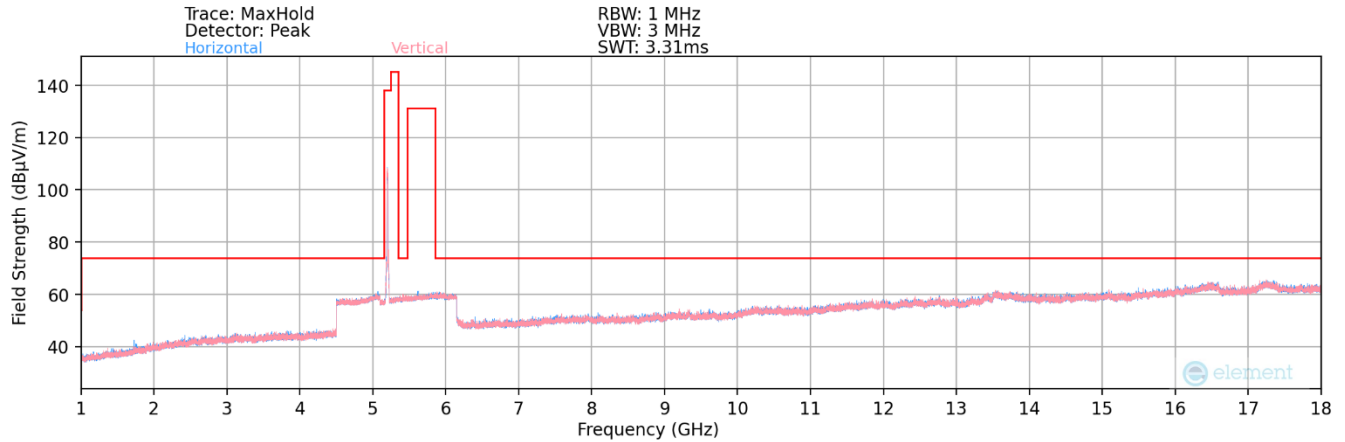

**Plot 7-129. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII 1 Ch. 40)**

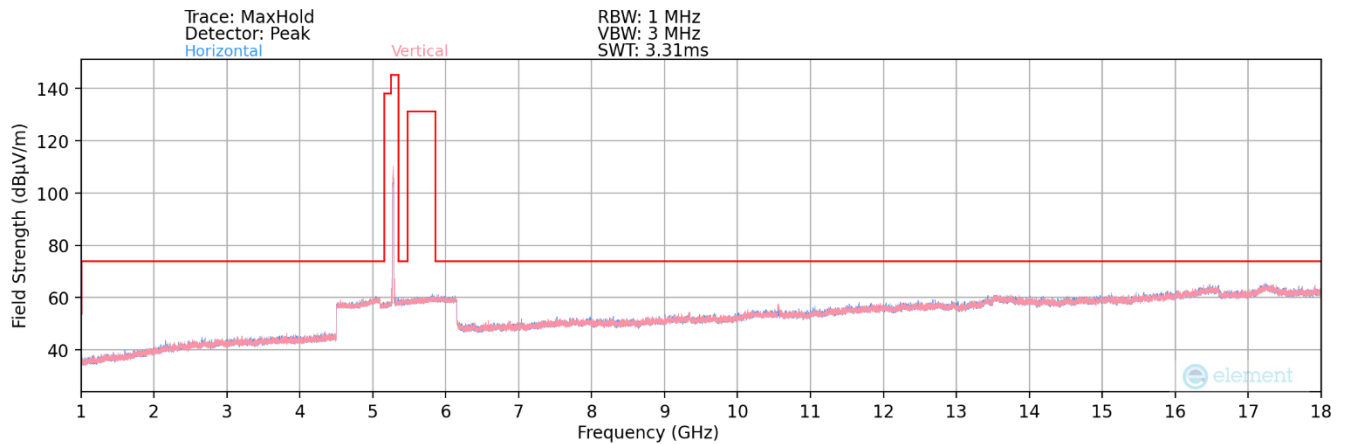


**Plot 7-130. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII 2A Ch. 56)**

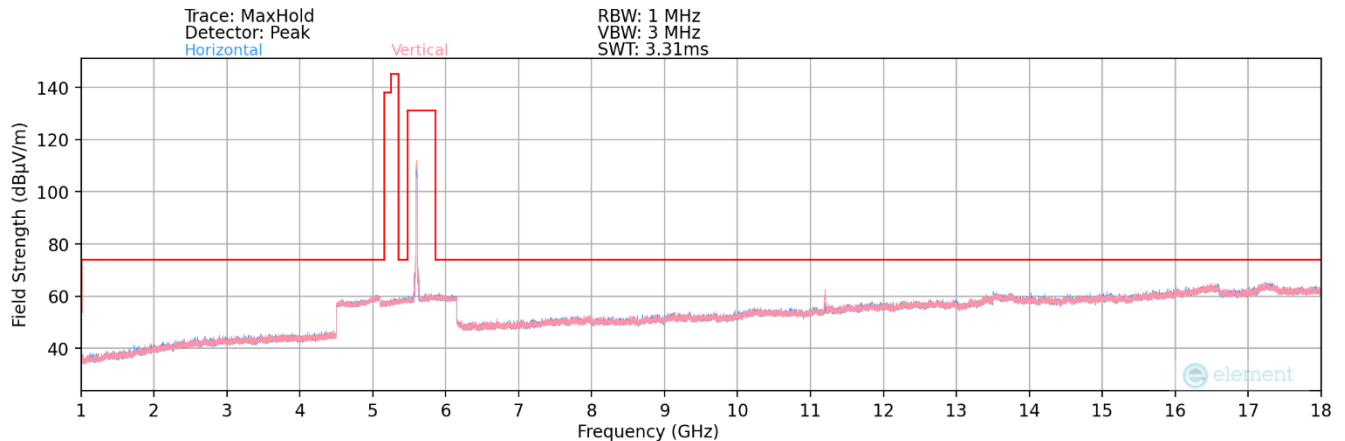


**Plot 7-131. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII 2C Ch. 120)**


|                                         |                                        |                              |                                   |
|-----------------------------------------|----------------------------------------|------------------------------|-----------------------------------|
| FCC ID: A3LSMX930<br>IC: 649E-SMX930    | MEASUREMENT REPORT                     |                              | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2505130048-06.A3L | Test Dates:<br>05/13/2025 - 07/18/2025 | EUT Type:<br>Portable Tablet | Page 117 of 146                   |

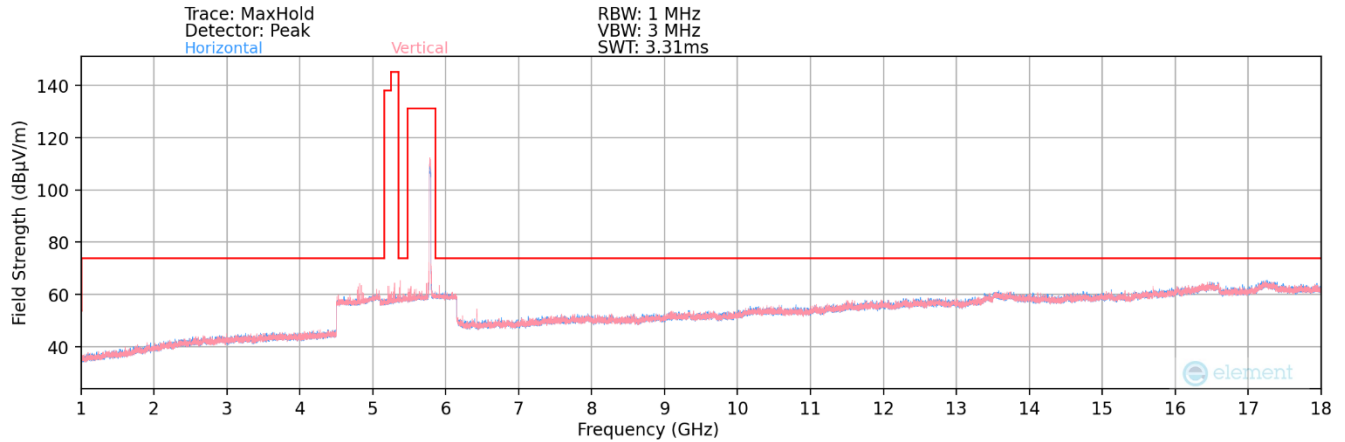

**Plot 7-132. Radiated Spurious Plot above 1GHz MIMO (802.11ax –UNII 3 Ch. 157)**

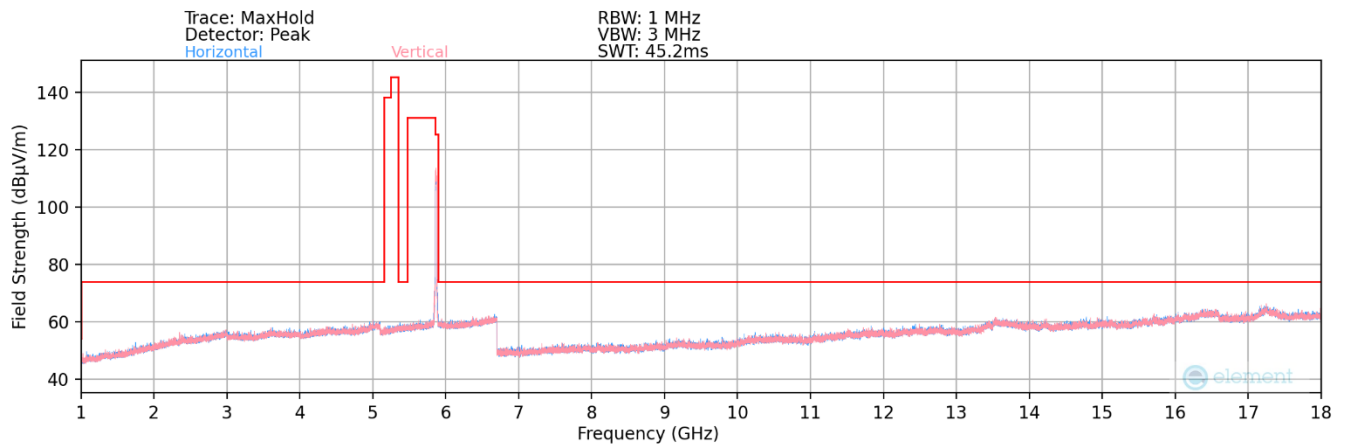


**Plot 7-133. Radiated Spurious Plot above 1GHz MIMO (802.11ax –UNII 4 Ch. 173)**

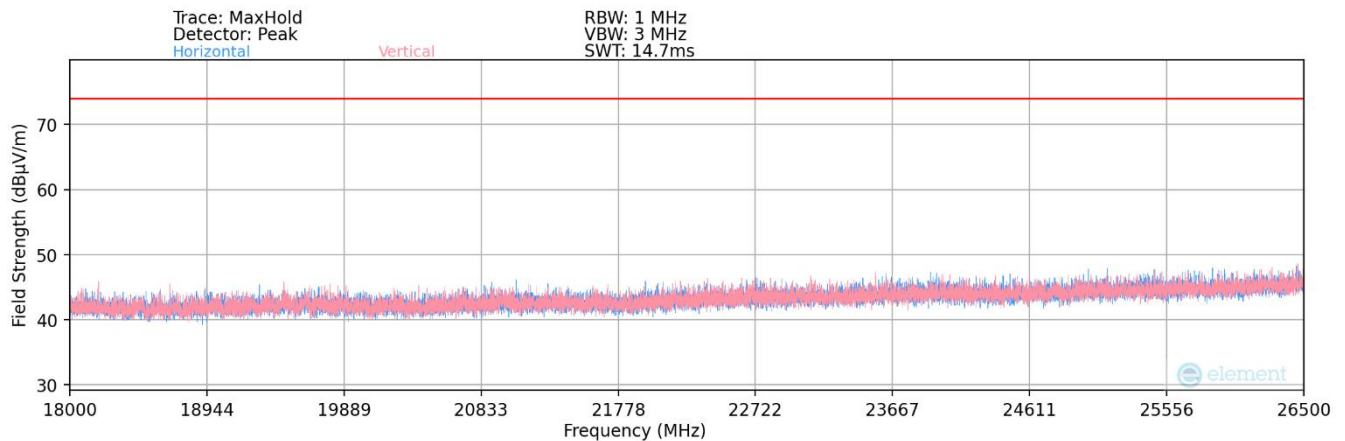

**Plot 7-134. Radiated Spurious Plot 18GHz - 26.5GHz (802.11ax)**

|                                                    |                                               |                                     |                                          |
|----------------------------------------------------|-----------------------------------------------|-------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMX930<br><b>IC:</b> 649E-SMX930 | <b>MEASUREMENT REPORT</b>                     |                                     | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2505130048-06.A3L     | <b>Test Dates:</b><br>05/13/2025 - 07/18/2025 | <b>EUT Type:</b><br>Portable Tablet | Page 118 of 146                          |

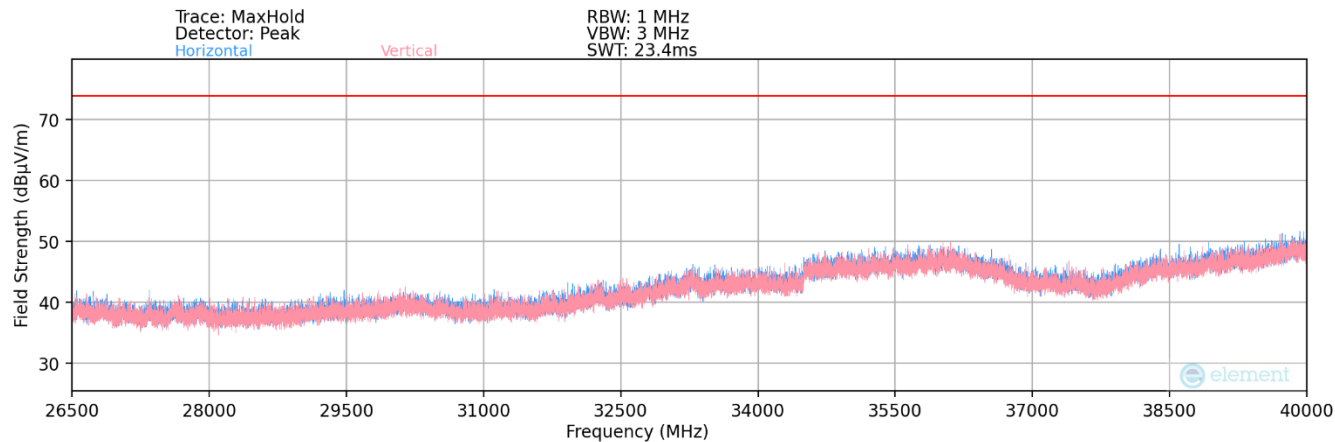

Plot 7-135. Radiated Spurious Plot 26.5GHz - 40GHz (802.11ax)

|                                                    |                                               |                                     |                                          |
|----------------------------------------------------|-----------------------------------------------|-------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMX930<br><b>IC:</b> 649E-SMX930 | <b>MEASUREMENT REPORT</b>                     |                                     | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2505130048-06.A3L     | <b>Test Dates:</b><br>05/13/2025 - 07/18/2025 | <b>EUT Type:</b><br>Portable Tablet | Page 119 of 146                          |

## MIMO Radiated Spurious Emission Measurements (242 Tones) –UNII 1

| Mode                | Antenna | UNII Band | Channel | Test Channel Freq. [MHz] | RU Index | Restricted | Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|---------------------|---------|-----------|---------|--------------------------|----------|------------|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 802.11ax<br>RU 242T | MIMO    | 1         | 36      | 5180                     | 61       |            | 10360.00        | Peak     | H               | -                   | -                          | -69.16               | 12.04       | 0.00                            | 49.88                   | 68.20          | -18.32      |
|                     |         |           |         |                          |          | *          | 15540.00        | Average  | H               | -                   | -                          | -81.76               | 14.08       | 0.00                            | 39.32                   | 53.98          | -14.66      |
|                     |         |           |         |                          |          | *          | 15540.00        | Peak     | H               | -                   | -                          | -70.41               | 14.08       | 0.00                            | 50.67                   | 73.98          | -23.31      |
|                     |         |           |         |                          |          | *          | 20720.00        | Average  | H               | -                   | -                          | -62.85               | 2.48        | -9.54                           | 37.09                   | 53.98          | -16.89      |
|                     |         |           |         |                          |          | *          | 20720.00        | Peak     | H               | -                   | -                          | -55.41               | 2.48        | -9.54                           | 44.53                   | 73.98          | -29.45      |
|                     |         |           | 40      | 5200                     | 61       |            | 25900.00        | Peak     | H               | -                   | -                          | -55.01               | 4.78        | -9.54                           | 47.23                   | 68.20          | -20.97      |
|                     |         |           |         |                          |          |            | 10400.00        | Peak     | H               | -                   | -                          | -68.96               | 12.45       | 0.00                            | 50.49                   | 68.20          | -17.71      |
|                     |         |           |         |                          |          | *          | 15600.00        | Average  | H               | -                   | -                          | -81.99               | 14.12       | 0.00                            | 39.13                   | 53.98          | -14.85      |
|                     |         |           |         |                          |          | *          | 15600.00        | Peak     | H               | -                   | -                          | -70.53               | 14.12       | 0.00                            | 50.59                   | 73.98          | -23.39      |
|                     |         |           |         |                          |          | *          | 20800.00        | Average  | H               | -                   | -                          | -63.45               | 2.52        | -9.54                           | 36.53                   | 53.98          | -17.45      |
|                     |         |           |         |                          |          | *          | 20800.00        | Peak     | H               | -                   | -                          | -55.88               | 2.52        | -9.54                           | 44.10                   | 73.98          | -29.88      |
|                     |         |           |         |                          |          |            | 26000.00        | Peak     | H               | -                   | -                          | -55.41               | 4.78        | -9.54                           | 46.83                   | 68.20          | -21.37      |
|                     |         |           | 48      | 5240                     | 61       |            | 10480.00        | Peak     | H               | -                   | -                          | -69.97               | 13.04       | 0.00                            | 50.07                   | 68.20          | -18.13      |
|                     |         |           |         |                          |          | *          | 15720.00        | Average  | H               | -                   | -                          | -82.04               | 14.52       | 0.00                            | 39.48                   | 53.98          | -14.50      |
|                     |         |           |         |                          |          | *          | 15720.00        | Peak     | H               | -                   | -                          | -70.55               | 14.52       | 0.00                            | 50.97                   | 73.98          | -23.01      |
|                     |         |           |         |                          |          |            | 20960.00        | Peak     | H               | -                   | -                          | -55.34               | 2.84        | -9.54                           | 44.96                   | 68.20          | -23.24      |
|                     |         |           |         |                          |          |            | 26200.00        | Peak     | H               | -                   | -                          | -55.28               | 4.91        | -9.54                           | 47.09                   | 68.20          | -21.11      |

**Table 7-40. Radiated Measurements MIMO (242 Tones)**

|                                         |                                        |                              |                                   |
|-----------------------------------------|----------------------------------------|------------------------------|-----------------------------------|
| FCC ID: A3LSMX930<br>IC: 649E-SMX930    | MEASUREMENT REPORT                     |                              | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2505130048-06.A3L | Test Dates:<br>05/13/2025 - 07/18/2025 | EUT Type:<br>Portable Tablet | Page 120 of 146                   |



## MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII 2A

| Mode                | Antenna | UNII Band | Channel | Test Channel Freq. [MHz] | RU Index | Restricted | Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|---------------------|---------|-----------|---------|--------------------------|----------|------------|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 802.11ax<br>RU 242T | MIMO    | 2A        | 52      | 5260                     | 61       |            | 10520.00        | Peak     | H               | 373                 | 277                        | -66.54               | 13.01       | 0.00                            | 53.47                   | 68.20          | -14.73      |
|                     |         |           |         |                          |          | *          | 15780.00        | Average  | H               | -                   | -                          | -82.12               | 14.41       | 0.00                            | 39.29                   | 53.98          | -14.69      |
|                     |         |           |         |                          |          | *          | 15780.00        | Peak     | H               | -                   | -                          | -70.06               | 14.41       | 0.00                            | 51.35                   | 73.98          | -22.63      |
|                     |         |           |         |                          |          | *          | 21040.00        | Average  | H               | -                   | -                          | -63.33               | 2.92        | -9.54                           | 37.05                   | 53.98          | -16.93      |
|                     |         |           |         |                          |          | *          | 21040.00        | Peak     | H               | -                   | -                          | -54.55               | 2.92        | -9.54                           | 45.84                   | 73.98          | -28.14      |
|                     |         |           |         |                          |          |            | 26300.00        | Peak     | H               | -                   | -                          | -53.90               | 4.91        | -9.54                           | 48.47                   | 68.20          | -19.73      |
|                     |         |           | 56      | 5280                     | 61       |            | 10560.00        | Peak     | H               | 175                 | 296                        | -66.38               | 12.82       | 0.00                            | 53.44                   | 68.20          | -14.76      |
|                     |         |           |         |                          |          | *          | 15840.00        | Average  | H               | -                   | -                          | -81.61               | 14.10       | 0.00                            | 39.49                   | 53.98          | -14.49      |
|                     |         |           |         |                          |          | *          | 15840.00        | Peak     | H               | -                   | -                          | -69.50               | 14.10       | 0.00                            | 51.60                   | 73.98          | -22.38      |
|                     |         |           |         |                          |          | *          | 21120.00        | Average  | H               | -                   | -                          | -63.75               | 2.87        | -9.54                           | 36.58                   | 53.98          | -17.40      |
|                     |         |           |         |                          |          | *          | 21120.00        | Peak     | H               | -                   | -                          | -55.66               | 2.87        | -9.54                           | 44.67                   | 73.98          | -29.31      |
|                     |         |           |         |                          |          |            | 26400.00        | Peak     | H               | -                   | -                          | -54.38               | 4.85        | -9.54                           | 47.94                   | 68.20          | -20.26      |
|                     |         |           | 64      | 5320                     | 61       | *          | 10640.00        | Average  | H               | 170                 | 295                        | -78.39               | 12.81       | 0.00                            | 41.42                   | 53.98          | -12.56      |
|                     |         |           |         |                          |          | *          | 10640.00        | Peak     | H               | 170                 | 295                        | -65.84               | 12.81       | 0.00                            | 53.97                   | 73.98          | -20.01      |
|                     |         |           |         |                          |          | *          | 15960.00        | Average  | H               | -                   | -                          | -82.14               | 15.15       | 0.00                            | 40.01                   | 53.98          | -13.97      |
|                     |         |           |         |                          |          | *          | 15960.00        | Peak     | H               | -                   | -                          | -70.52               | 15.15       | 0.00                            | 51.63                   | 73.98          | -22.35      |
|                     |         |           |         |                          |          | *          | 21280.00        | Average  | H               | -                   | -                          | -63.87               | 2.96        | -9.54                           | 36.55                   | 53.98          | -17.43      |
|                     |         |           |         |                          |          | *          | 21280.00        | Peak     | H               | -                   | -                          | -54.66               | 2.96        | -9.54                           | 45.76                   | 73.98          | -28.22      |
|                     |         |           |         |                          |          |            | 26600.00        | Peak     | H               | -                   | -                          | -54.90               | 5.05        | -9.54                           | 47.62                   | 68.20          | -20.58      |

**Table 7-41. Radiated Measurements MIMO (242 Tones)**

|                                                    |                                               |                                     |                                          |
|----------------------------------------------------|-----------------------------------------------|-------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMX930<br><b>IC:</b> 649E-SMX930 | <b>MEASUREMENT REPORT</b>                     |                                     | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2505130048-06.A3L     | <b>Test Dates:</b><br>05/13/2025 - 07/18/2025 | <b>EUT Type:</b><br>Portable Tablet | Page 121 of 146                          |

## MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII 2C

| Mode                | Antenna | UNII Band | Channel | Test Channel Freq. [MHz] | RU Index | Restricted | Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|---------------------|---------|-----------|---------|--------------------------|----------|------------|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 802.11ax<br>RU 242T | MIMO    | 2C        | 100     | 5500                     | 61       | *          | 11000.00        | Average  | H               | 177                 | 235                        | -76.97               | 12.47       | 0.00                            | 42.50                   | 53.98          | -11.48      |
|                     |         |           |         |                          |          | *          | 11000.00        | Peak     | H               | 177                 | 235                        | -64.41               | 12.47       | 0.00                            | 55.06                   | 73.98          | -18.92      |
|                     |         |           |         |                          |          |            | 16500.00        | Peak     | H               | -                   | -                          | -69.58               | 15.62       | -9.54                           | 43.50                   | 68.20          | -24.70      |
|                     |         |           |         |                          |          |            | 22000.00        | Peak     | H               | -                   | -                          | -54.33               | 3.01        | -9.54                           | 46.14                   | 68.20          | -22.06      |
|                     |         |           |         |                          |          |            | 27500.00        | Peak     | H               | -                   | -                          | -54.44               | 5.00        | -9.54                           | 48.03                   | 68.20          | -20.17      |
|                     |         |           | 120     | 5600                     | 61       | *          | 11200.00        | Average  | H               | 279                 | 247                        | -80.07               | 12.60       | 0.00                            | 39.53                   | 53.98          | -14.45      |
|                     |         |           |         |                          |          | *          | 11200.00        | Peak     | H               | 279                 | 247                        | -67.53               | 12.60       | 0.00                            | 52.07                   | 73.98          | -21.91      |
|                     |         |           |         |                          |          |            | 16800.00        | Peak     | H               | -                   | -                          | -69.52               | 16.11       | 0.00                            | 53.59                   | 68.20          | -14.61      |
|                     |         |           |         |                          |          | *          | 22400.00        | Average  | H               | -                   | -                          | -63.68               | 3.44        | -9.54                           | 37.22                   | 53.98          | -16.76      |
|                     |         |           |         |                          |          | *          | 22400.00        | Peak     | H               | -                   | -                          | -54.65               | 3.44        | -9.54                           | 46.25                   | 73.98          | -27.73      |
|                     |         |           | 144     | 5720                     | 61       |            | 28000.00        | Peak     | H               | -                   | -                          | -54.66               | 5.31        | -9.54                           | 48.11                   | 68.20          | -20.09      |
|                     |         |           |         |                          |          | *          | 11440.00        | Average  | H               | -                   | -                          | -81.78               | 13.48       | 0.00                            | 38.70                   | 53.98          | -15.28      |
|                     |         |           |         |                          |          | *          | 11440.00        | Peak     | H               | -                   | -                          | -70.07               | 13.48       | 0.00                            | 50.41                   | 73.98          | -23.57      |
|                     |         |           |         |                          |          |            | 17160.00        | Peak     | H               | -                   | -                          | -70.02               | 16.71       | 0.00                            | 53.69                   | 68.20          | -14.51      |
|                     |         |           |         |                          |          | *          | 22880.00        | Average  | H               | -                   | -                          | -61.63               | 3.60        | -9.54                           | 39.43                   | 53.98          | -14.55      |
|                     |         |           |         |                          |          | *          | 22880.00        | Peak     | H               | -                   | -                          | -55.00               | 3.60        | -9.54                           | 46.06                   | 73.98          | -27.92      |
|                     |         |           |         |                          |          |            | 28600.00        | Peak     | H               | -                   | -                          | -55.37               | 5.30        | -9.54                           | 47.40                   | 68.20          | -20.80      |

**Table 7-42. Radiated Measurements MIMO (242 Tones)**

|                                         |                                        |                              |                                   |
|-----------------------------------------|----------------------------------------|------------------------------|-----------------------------------|
| FCC ID: A3LSMX930<br>IC: 649E-SMX930    | MEASUREMENT REPORT                     |                              | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2505130048-06.A3L | Test Dates:<br>05/13/2025 - 07/18/2025 | EUT Type:<br>Portable Tablet | Page 122 of 146                   |

## MIMO Radiated Spurious Emission Measurements (242 Tones) –UNII 3

| Mode                | Antenna | UNII Band | Channel | Test Channel Freq. [MHz] | RU Index | Restricted | Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|---------------------|---------|-----------|---------|--------------------------|----------|------------|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 802.11ax<br>RU 242T | MIMO    | 3         | 149     | 5745                     | 61       | *          | 11490.00        | Average  | H               | -                   | -                          | -81.71               | 13.01       | 0.00                            | 38.30                   | 53.98          | -15.68      |
|                     |         |           |         |                          |          | *          | 11490.00        | Peak     | H               | -                   | -                          | -69.41               | 13.01       | 0.00                            | 50.60                   | 73.98          | -23.38      |
|                     |         |           |         |                          |          |            | 17235.00        | Peak     | H               | -                   | -                          | -70.30               | 16.91       | 0.00                            | 53.61                   | 68.20          | -14.59      |
|                     |         |           |         |                          |          | *          | 22980.00        | Average  | H               | -                   | -                          | -61.26               | 3.63        | -9.54                           | 39.83                   | 53.98          | -14.15      |
|                     |         |           |         |                          |          | *          | 22980.00        | Peak     | H               | -                   | -                          | -55.05               | 3.63        | -9.54                           | 46.04                   | 73.98          | -27.94      |
|                     |         |           |         |                          |          |            | 28725.00        | Peak     | H               | -                   | -                          | -55.14               | 5.24        | -9.54                           | 47.56                   | 68.20          | -20.64      |
|                     |         |           | 157     | 5785                     | 61       | *          | 11570.00        | Average  | H               | -                   | -                          | -81.05               | 13.03       | 0.00                            | 38.98                   | 53.98          | -15.00      |
|                     |         |           |         |                          |          | *          | 11570.00        | Peak     | H               | -                   | -                          | -68.72               | 13.03       | 0.00                            | 51.31                   | 73.98          | -22.67      |
|                     |         |           |         |                          |          |            | 17355.00        | Peak     | H               | -                   | -                          | -70.53               | 17.67       | 0.00                            | 54.14                   | 68.20          | -14.06      |
|                     |         |           |         |                          |          |            | 23140.00        | Peak     | H               | -                   | -                          | -53.37               | 3.75        | -9.54                           | 47.84                   | 68.20          | -20.36      |
|                     |         |           |         |                          |          |            | 28925.00        | Peak     | H               | -                   | -                          | -55.55               | 5.12        | -9.54                           | 47.03                   | 68.20          | -21.17      |
|                     |         |           |         |                          |          | *          | 11650.00        | Average  | H               | -                   | -                          | -81.27               | 13.41       | 0.00                            | 39.14                   | 53.98          | -14.84      |
|                     |         |           | 165     | 5825                     | 61       | *          | 11650.00        | Peak     | H               | -                   | -                          | -69.49               | 13.41       | 0.00                            | 50.92                   | 73.98          | -23.06      |
|                     |         |           |         |                          |          |            | 17475.00        | Peak     | H               | -                   | -                          | -70.09               | 16.84       | 0.00                            | 53.75                   | 68.20          | -14.45      |
|                     |         |           |         |                          |          |            | 23300.00        | Peak     | H               | -                   | -                          | -55.50               | 3.73        | -9.54                           | 45.69                   | 68.20          | -22.51      |
|                     |         |           |         |                          |          |            | 29125.00        | Peak     | H               | -                   | -                          | -54.73               | 5.23        | -9.54                           | 47.97                   | 68.20          | -20.23      |

**Table 7-43. Radiated Measurements MIMO (242 Tones)**

|                                                    |                                               |                                     |                                          |
|----------------------------------------------------|-----------------------------------------------|-------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMX930<br><b>IC:</b> 649E-SMX930 | <b>MEASUREMENT REPORT</b>                     |                                     | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2505130048-06.A3L     | <b>Test Dates:</b><br>05/13/2025 - 07/18/2025 | <b>EUT Type:</b><br>Portable Tablet | Page 123 of 146                          |

## MIMO Radiated Spurious Emission Measurements (242 Tones) –UNII 4


| Mode                | Antenna | UNII Band | Channel | Test Channel Freq. [MHz] | RU Index | Restricted | Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|---------------------|---------|-----------|---------|--------------------------|----------|------------|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 802.11ax<br>RU 242T | MIMO    | 4         | 169     | 5845                     | 61       | *          | 11690.00        | Average  | H               | -                   | -                          | -80.59               | 13.27       | 0.00                            | 39.68                   | 53.98          | -14.30      |
|                     |         |           |         |                          |          | *          | 11690.00        | Peak     | H               | -                   | -                          | -68.17               | 13.27       | 0.00                            | 52.10                   | 73.98          | -21.88      |
|                     |         |           |         |                          |          |            | 17535.00        | Peak     | H               | -                   | -                          | -69.35               | 17.37       | 0.00                            | 55.02                   | 68.20          | -13.18      |
|                     |         |           |         |                          |          |            | 23380.00        | Peak     | H               | -                   | -                          | -54.85               | 3.80        | -9.54                           | 46.42                   | 68.20          | -21.78      |
|                     |         |           |         |                          |          |            | 29225.00        | Peak     | H               | -                   | -                          | -54.71               | 5.22        | -9.54                           | 47.97                   | 68.20          | -20.23      |
|                     |         |           |         |                          |          |            | 35070.00        | Peak     | H               | -                   | -                          | -54.84               | 9.52        | -9.54                           | 52.14                   | 68.20          | -16.06      |
|                     |         |           | 173     | 5865                     | 61       | *          | 11730.00        | Average  | H               | -                   | -                          | -81.81               | 14.39       | 0.00                            | 39.58                   | 53.98          | -14.40      |
|                     |         |           |         |                          |          | *          | 11730.00        | Peak     | H               | -                   | -                          | -69.74               | 14.39       | 0.00                            | 51.65                   | 73.98          | -22.33      |
|                     |         |           |         |                          |          |            | 17595.00        | Peak     | H               | -                   | -                          | -69.78               | 17.00       | 0.00                            | 54.22                   | 68.20          | -13.98      |
|                     |         |           |         |                          |          |            | 23460.00        | Peak     | H               | -                   | -                          | -55.12               | 3.86        | -9.54                           | 46.20                   | 68.20          | -22.00      |
|                     |         |           |         |                          |          |            | 29325.00        | Peak     | H               | -                   | -                          | -55.18               | 5.14        | -9.54                           | 47.43                   | 68.20          | -20.77      |
|                     |         |           |         |                          |          |            | 35190.00        | Peak     | H               | -                   | -                          | -54.43               | 9.61        | -9.54                           | 52.64                   | 68.20          | -15.56      |
|                     |         |           | 177     | 5885                     | 61       | *          | 11770.00        | Average  | H               | -                   | -                          | -81.41               | 13.93       | 0.00                            | 39.52                   | 53.98          | -14.46      |
|                     |         |           |         |                          |          | *          | 11770.00        | Peak     | H               | -                   | -                          | -69.54               | 13.93       | 0.00                            | 51.39                   | 73.98          | -22.59      |
|                     |         |           |         |                          |          |            | 17655.00        | Peak     | H               | -                   | -                          | -69.94               | 16.89       | 0.00                            | 53.95                   | 68.20          | -14.25      |
|                     |         |           |         |                          |          |            | 23540.00        | Peak     | H               | -                   | -                          | -55.37               | 4.01        | -9.54                           | 46.10                   | 68.20          | -22.10      |
|                     |         |           |         |                          |          |            | 29425.00        | Peak     | H               | -                   | -                          | -54.59               | 5.11        | -9.54                           | 47.97                   | 68.20          | -20.23      |
|                     |         |           |         |                          |          |            | 35310.00        | Peak     | H               | -                   | -                          | -54.65               | 9.72        | -9.54                           | 52.53                   | 68.20          | -15.67      |

**Table 7-44. Radiated Measurements MIMO (242 Tones)**


|                                                    |                                               |                                     |                                          |
|----------------------------------------------------|-----------------------------------------------|-------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMX930<br><b>IC:</b> 649E-SMX930 | <b>MEASUREMENT REPORT</b>                     |                                     | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2505130048-06.A3L     | <b>Test Dates:</b><br>05/13/2025 - 07/18/2025 | <b>EUT Type:</b><br>Portable Tablet | Page 124 of 146                          |

### 7.6.3 MIMO Radiated Band Edge Measurements (20MHz BW – Partial Tone – 106+26T)

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11be |
| Worst Case Transfer Rate: | MCS0     |
| RU Index:                 | 82       |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5180MHz  |
| Channel:                  | 36       |

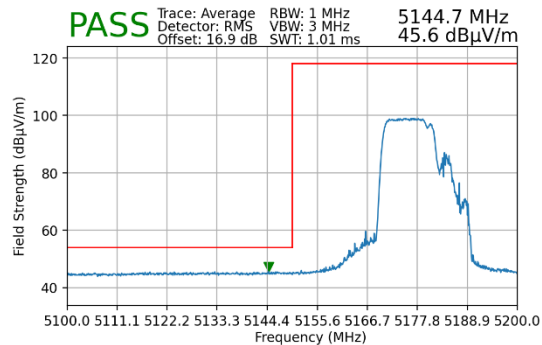


**Plot 7-136. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1 – 106+26 Tones)**

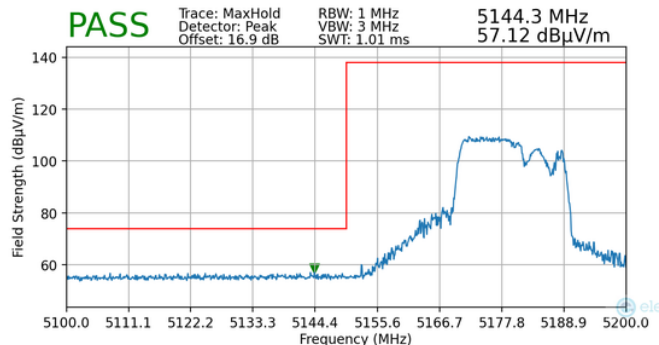


**Plot 7-137. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1 – 106+26 Tones)**

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11be |
| Worst Case Transfer Rate: | MCS0     |
| RU Index:                 | 83       |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5320MHz  |
| Channel:                  | 64       |

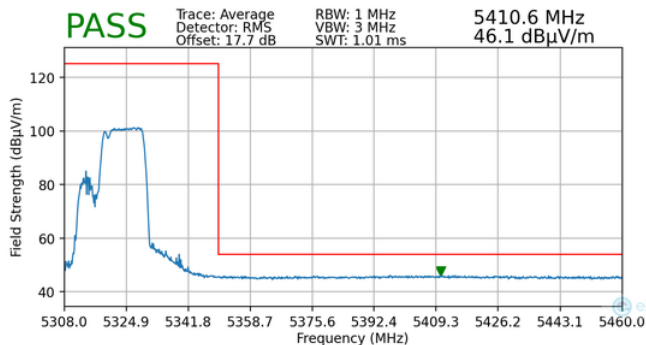


**Plot 7-138. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A – 106+26 Tones)**

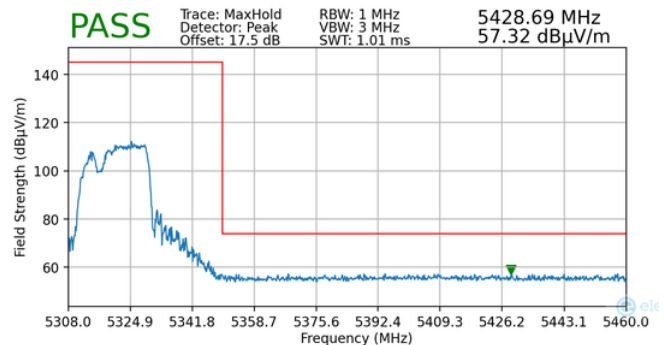


**Plot 7-139. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A – 106+26 Tones)**

|                                         |                                        |                              |                                   |
|-----------------------------------------|----------------------------------------|------------------------------|-----------------------------------|
| FCC ID: A3LSMX930<br>IC: 649E-SMX930    | MEASUREMENT REPORT                     |                              | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2505130048-06.A3L | Test Dates:<br>05/13/2025 - 07/18/2025 | EUT Type:<br>Portable Tablet | Page 125 of 146                   |

Worst Case Mode: 802.11be  
 Worst Case Transfer Rate: MCS0  
 RU Index: 82  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5500MHz  
 Channel: 100

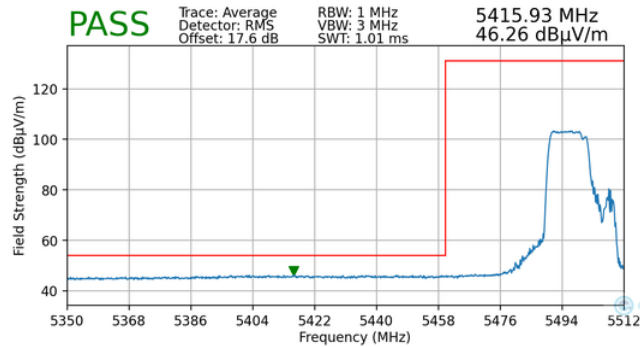


**Plot 7-140. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C – 106+26 Tones)**

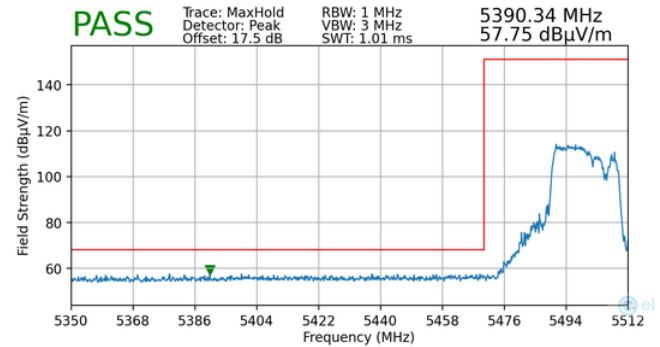

**Plot 7-141. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C – 106+26 Tones)**


Worst Case Mode: 802.11be  
 Worst Case Transfer Rate: MCS0  
 RU Index: 83  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165

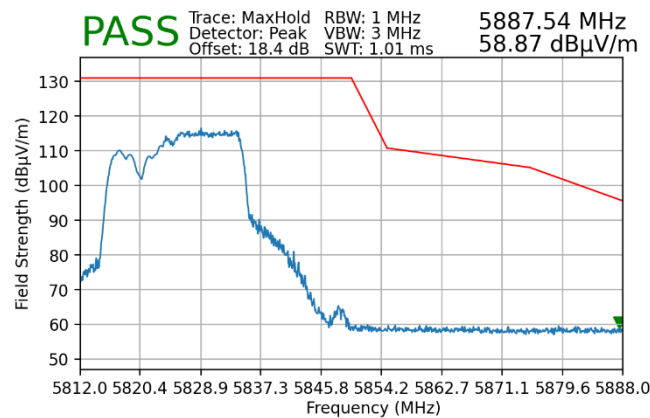

**Plot 7-142. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 3 – 106+26 Tones)**


|                                                |                                               |                                     |                                          |
|------------------------------------------------|-----------------------------------------------|-------------------------------------|------------------------------------------|
| FCC ID: A3LSMX930<br>IC: 649E-SMX930           | <b>MEASUREMENT REPORT</b>                     |                                     | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2505130048-06.A3L | <b>Test Dates:</b><br>05/13/2025 - 07/18/2025 | <b>EUT Type:</b><br>Portable Tablet | Page 126 of 146                          |

Worst Case Mode: 802.11be  
 Worst Case Transfer Rate: MCS0  
 RU Index: 82  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5845MHz  
 Channel: 169

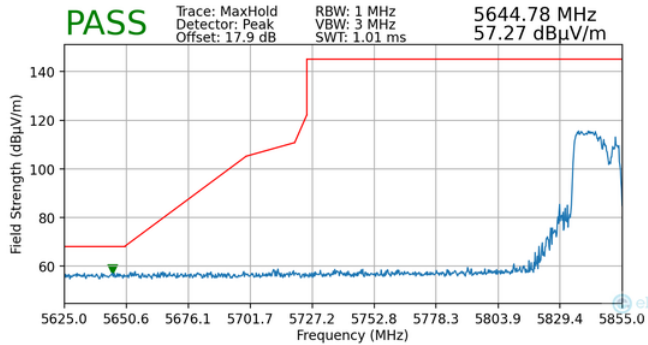


**Plot 7-143. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 4 – 106+26 Tones)**

Worst Case Mode: 802.11be  
 Worst Case Transfer Rate: MCS0  
 RU Index: 83  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5885MHz  
 Channel: 177

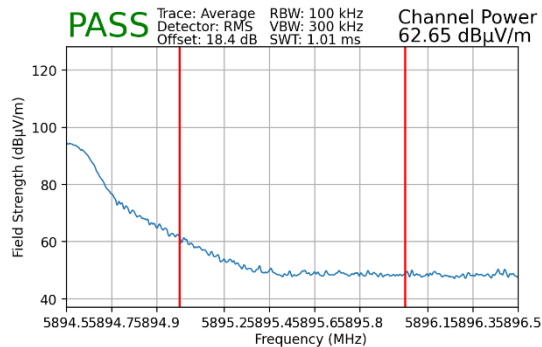

**Plot 7-144. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 4 – 106+26 Tones)**

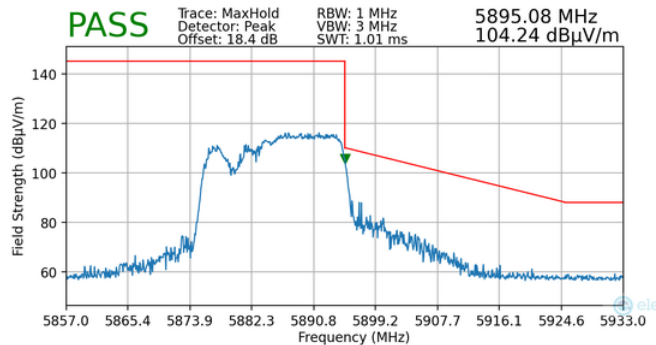


**Plot 7-145. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 4 – 106+26 Tones)**


|                                         |                                        |                              |                                   |
|-----------------------------------------|----------------------------------------|------------------------------|-----------------------------------|
| FCC ID: A3LSMX930<br>IC: 649E-SMX930    | MEASUREMENT REPORT                     |                              | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2505130048-06.A3L | Test Dates:<br>05/13/2025 - 07/18/2025 | EUT Type:<br>Portable Tablet | Page 127 of 146                   |

## 7.6.4 MIMO Radiated Band Edge Measurements (20MHz BW – Full Tone – 242T)

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ax |
| Worst Case Transfer Rate: | MCS0     |
| RU Index:                 | 61       |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5180MHz  |
| Channel:                  | 36       |

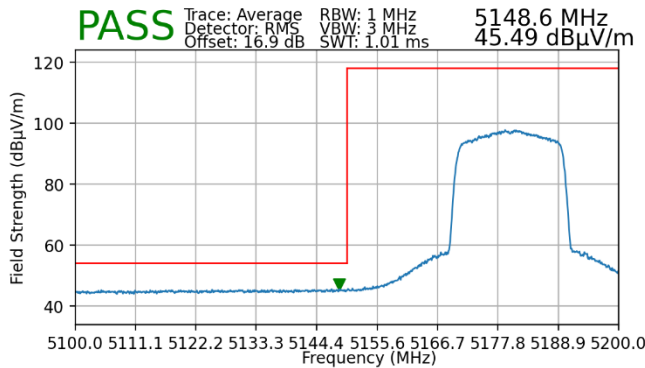


**Plot 7-146. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1 – 242 Tones)**

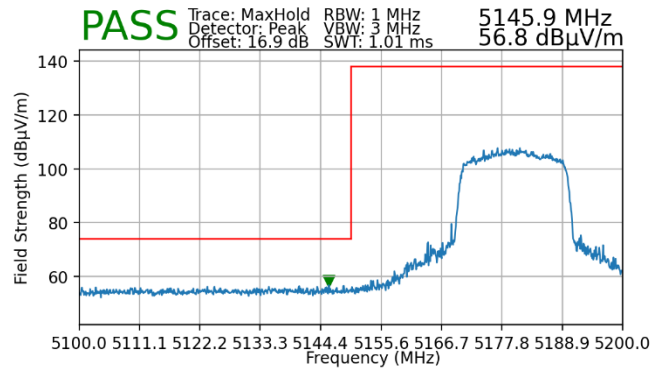


**Plot 7-147. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1 – 242 Tones)**

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ax |
| Worst Case Transfer Rate: | MCS0     |
| RU Index:                 | 61       |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5320MHz  |
| Channel:                  | 64       |

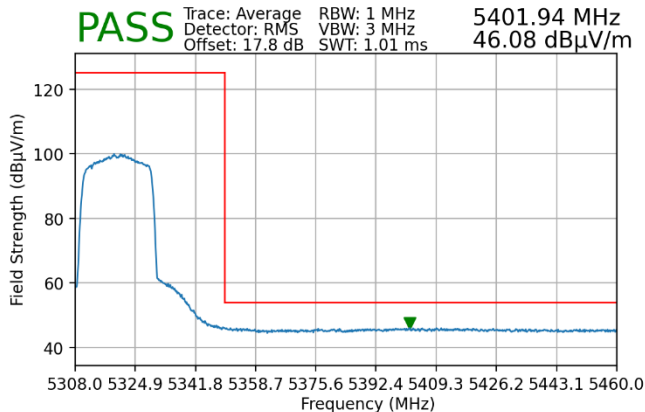

**Plot 7-148. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A – 242 Tones)**

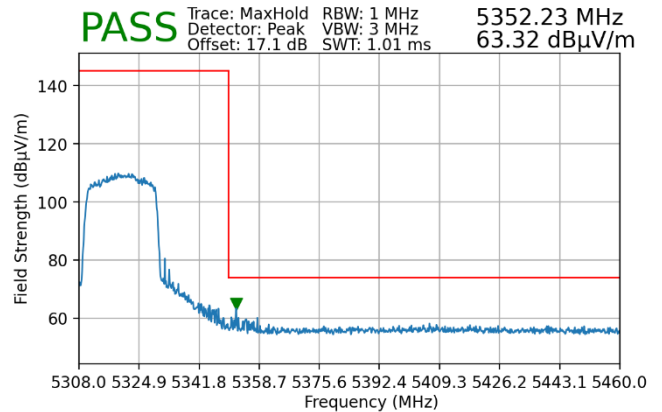


**Plot 7-149. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A – 242 Tones)**


|                                         |                                        |                              |                                   |
|-----------------------------------------|----------------------------------------|------------------------------|-----------------------------------|
| FCC ID: A3LSMX930<br>IC: 649E-SMX930    | MEASUREMENT REPORT                     |                              | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2505130048-06.A3L | Test Dates:<br>05/13/2025 - 07/18/2025 | EUT Type:<br>Portable Tablet | Page 128 of 146                   |



|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ax |
| Worst Case Transfer Rate: | MCS0     |
| RU Index:                 | 61       |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5500MHz  |
| Channel:                  | 100      |

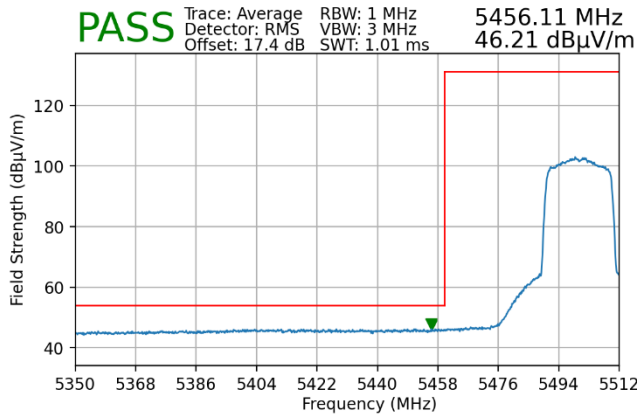


**Plot 7-150. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C – 242 Tones)**

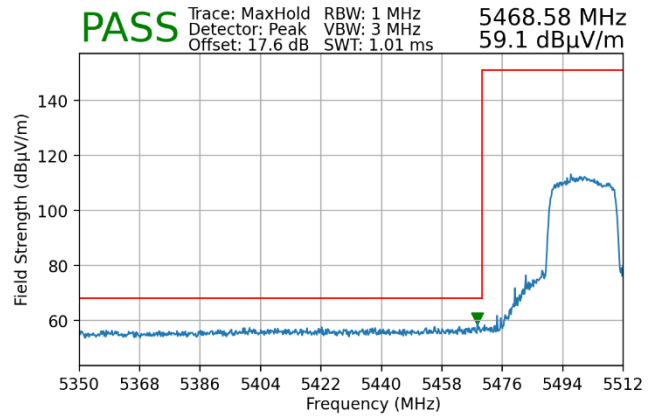

**Plot 7-151. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C – 242 Tones)**


|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ax |
| Worst Case Transfer Rate: | MCS0     |
| RU Index:                 | 61       |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5825MHz  |
| Channel:                  | 165      |

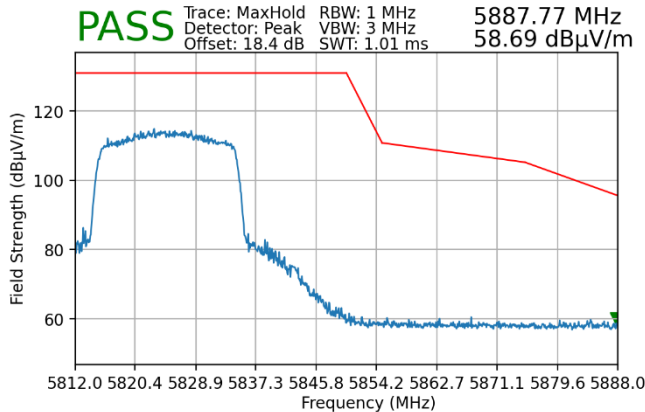

**Plot 7-152. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 3 – 242 Tones)**


|                                         |                                        |                              |                                   |
|-----------------------------------------|----------------------------------------|------------------------------|-----------------------------------|
| FCC ID: A3LSMX930<br>IC: 649E-SMX930    | MEASUREMENT REPORT                     |                              | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2505130048-06.A3L | Test Dates:<br>05/13/2025 - 07/18/2025 | EUT Type:<br>Portable Tablet | Page 129 of 146                   |

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS0  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5845MHz  
 Channel: 169

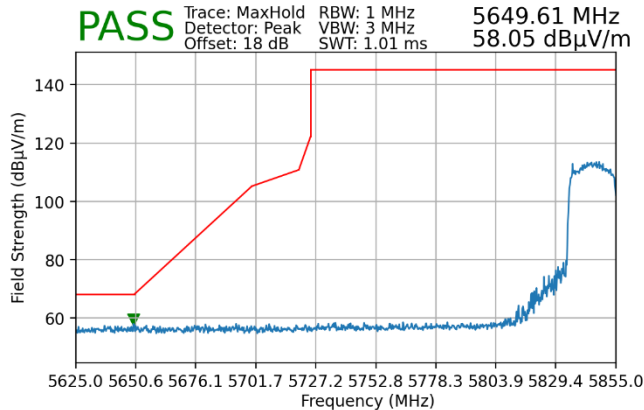


**Plot 7-153. Radiated Lower Band Edge Plot MIMO (Peak - UNII Band 4 - 242 Tones)**

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS0  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5885MHz  
 Channel: 177

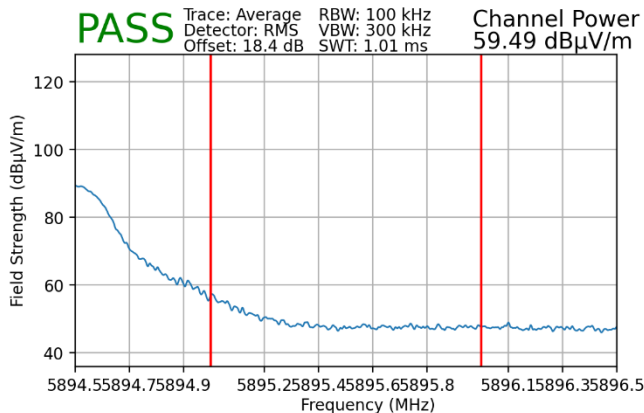

**Plot 7-154. Radiated Upper Band Edge Plot MIMO (Average - UNII Band 4 - 242 Tones)**

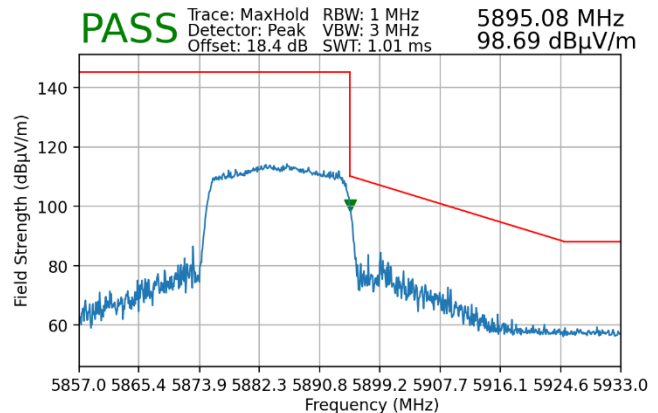


**Plot 7-155. Radiated Upper Band Edge Plot MIMO (Peak - UNII Band 4 - 242 Tones)**


|                                                    |                                               |                                     |                                          |
|----------------------------------------------------|-----------------------------------------------|-------------------------------------|------------------------------------------|
| <b>FCC ID:</b> A3LSMX930<br><b>IC:</b> 649E-SMX930 | <b>MEASUREMENT REPORT</b>                     |                                     | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1M2505130048-06.A3L     | <b>Test Dates:</b><br>05/13/2025 - 07/18/2025 | <b>EUT Type:</b><br>Portable Tablet | Page 130 of 146                          |

## 7.6.5 MIMO Radiated Band Edge Measurements (40MHz BW – Full Tone – 484T)

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ax |
| Worst Case Transfer Rate: | MCS0     |
| RU Index:                 | 65       |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5190MHz  |
| Channel:                  | 38       |

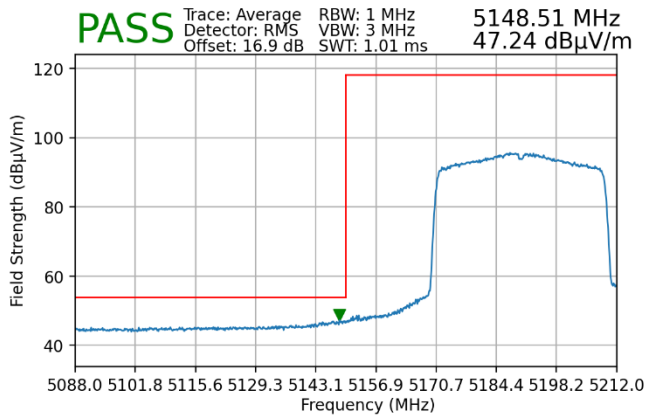


**Plot 7-156. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1 – 484 Tones)**

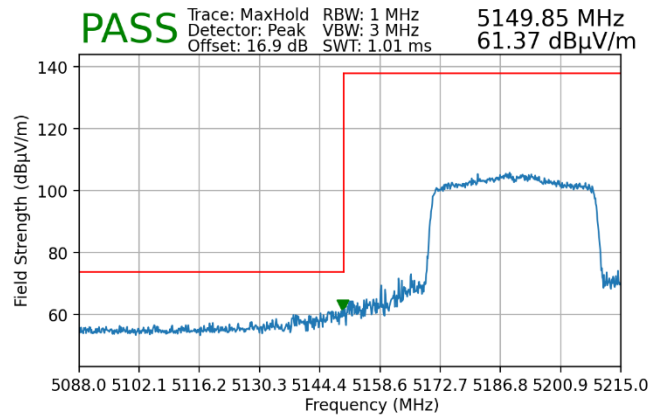


**Plot 7-157. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1 – 484 Tones)**

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ax |
| Worst Case Transfer Rate: | MCS0     |
| RU Index:                 | 65       |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5310MHz  |
| Channel:                  | 62       |

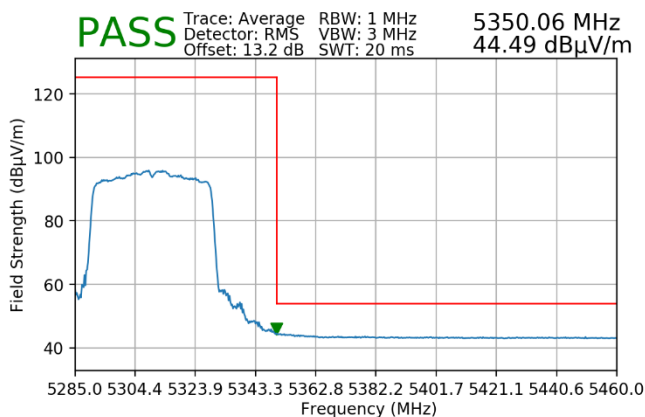


**Plot 7-158. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A – 484 Tones)**

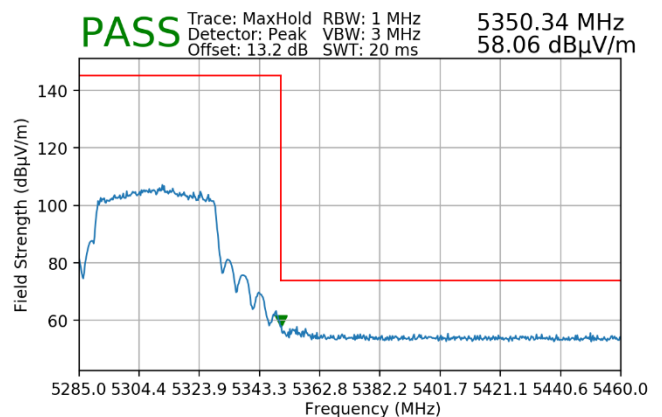


**Plot 7-159. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A – 484 Tones)**

|                                         |                                        |                              |                                   |
|-----------------------------------------|----------------------------------------|------------------------------|-----------------------------------|
| FCC ID: A3LSMX930<br>IC: 649E-SMX930    | MEASUREMENT REPORT                     |                              | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2505130048-06.A3L | Test Dates:<br>05/13/2025 - 07/18/2025 | EUT Type:<br>Portable Tablet | Page 131 of 146                   |

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ax |
| Worst Case Transfer Rate: | MCS0     |
| RU Index:                 | 65       |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5510MHz  |
| Channel:                  | 102      |

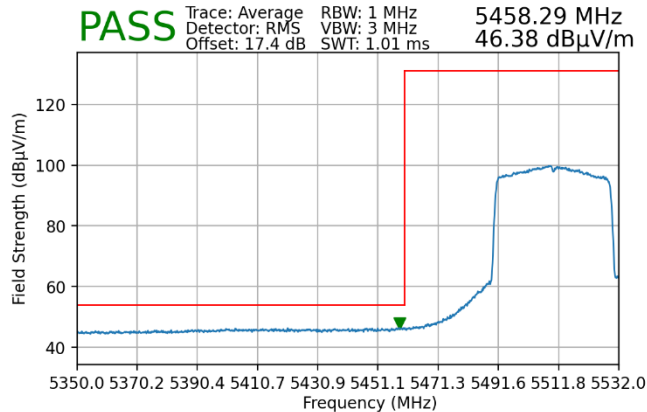


**Plot 7-160. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C – 484 Tones)**

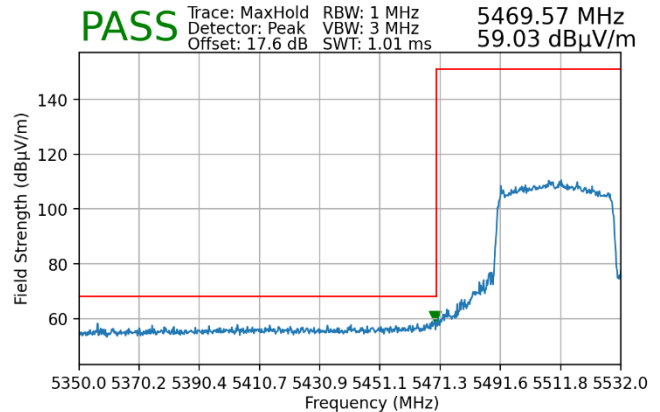

**Plot 7-161. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C – 484 Tones)**


|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ax |
| Worst Case Transfer Rate: | MCS0     |
| RU Index:                 | 65       |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5795MHz  |
| Channel:                  | 159      |

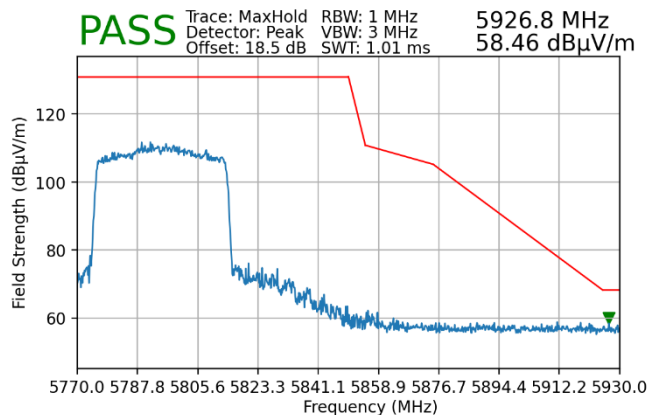

**Plot 7-162. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 3 – 484 Tones)**


|                                         |                                        |                              |                                   |
|-----------------------------------------|----------------------------------------|------------------------------|-----------------------------------|
| FCC ID: A3LSMX930<br>IC: 649E-SMX930    | MEASUREMENT REPORT                     |                              | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2505130048-06.A3L | Test Dates:<br>05/13/2025 - 07/18/2025 | EUT Type:<br>Portable Tablet | Page 132 of 146                   |

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ax |
| Worst Case Transfer Rate: | MCS0     |
| RU Index:                 | 65       |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5835MHz  |
| Channel:                  | 167      |

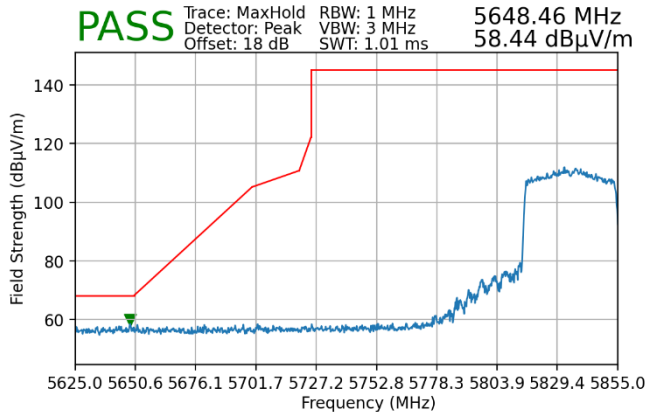


**Plot 7-163. Radiated Lower Band Edge Plot MIMO (Peak - UNII Band 4 - 484 Tones)**

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ax |
| Worst Case Transfer Rate: | MCS0     |
| RU Index:                 | 65       |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5875MHz  |
| Channel:                  | 175      |

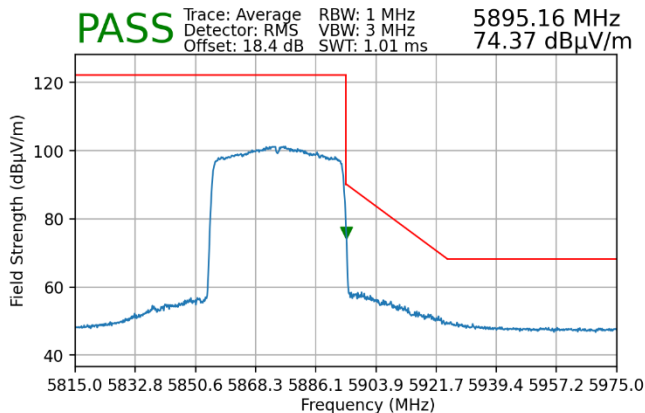

**Plot 7-164. Radiated Upper Band Edge Plot MIMO (Average - UNII Band 4 - 484 Tones)**

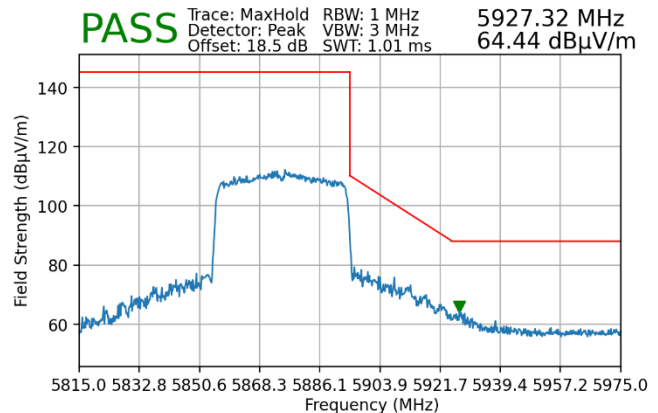


**Plot 7-165. Radiated Upper Band Edge Plot MIMO (Peak - UNII Band 4 - 484 Tones)**


|                                         |                                        |                              |                                   |
|-----------------------------------------|----------------------------------------|------------------------------|-----------------------------------|
| FCC ID: A3LSMX930<br>IC: 649E-SMX930    | MEASUREMENT REPORT                     |                              | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2505130048-06.A3L | Test Dates:<br>05/13/2025 - 07/18/2025 | EUT Type:<br>Portable Tablet | Page 133 of 146                   |

## 7.6.6 MIMO Radiated Band Edge Measurements (80MHz BW – Full Tone – 996T)

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ax |
| Worst Case Transfer Rate: | MCS0     |
| RU Index:                 | 67       |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5210MHz  |
| Channel:                  | 42       |

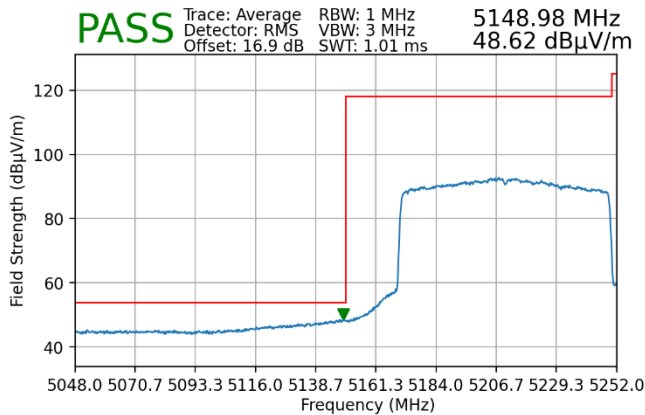


**Plot 7-166. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1 – 996 Tones)**

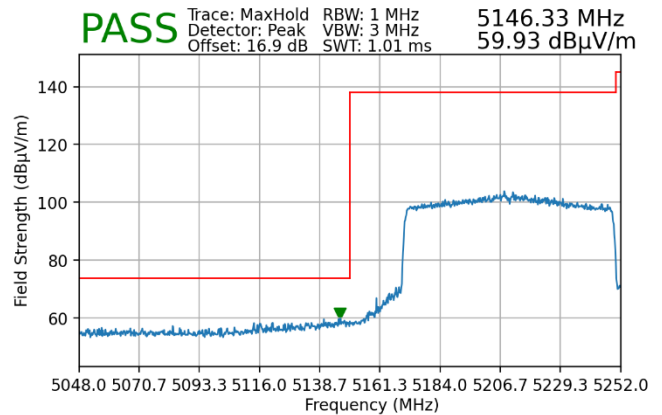


**Plot 7-167. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1 – 996 Tones)**

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ax |
| Worst Case Transfer Rate: | MCS0     |
| RU Index:                 | 67       |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5290MHz  |
| Channel:                  | 58       |

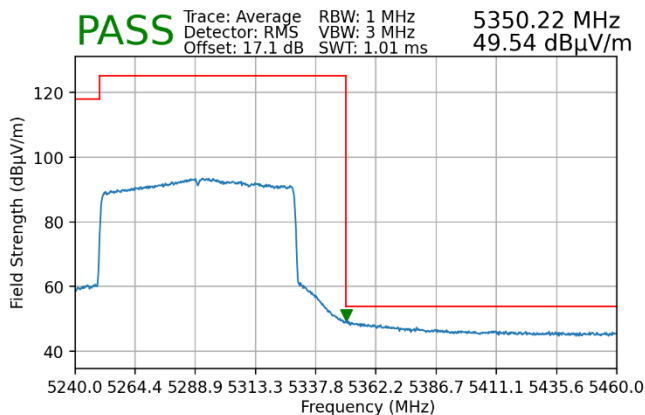


**Plot 7-168. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A – 996 Tones)**

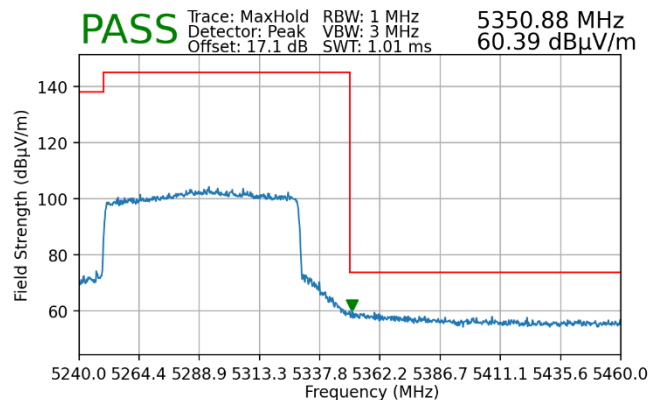


**Plot 7-169. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A – 996 Tones)**

|                                         |                                        |                              |                                   |
|-----------------------------------------|----------------------------------------|------------------------------|-----------------------------------|
| FCC ID: A3LSMX930<br>IC: 649E-SMX930    | MEASUREMENT REPORT                     |                              | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2505130048-06.A3L | Test Dates:<br>05/13/2025 - 07/18/2025 | EUT Type:<br>Portable Tablet | Page 134 of 146                   |

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ax |
| Worst Case Transfer Rate: | MCS0     |
| RU Index:                 | 67       |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5530MHz  |
| Channel:                  | 106      |

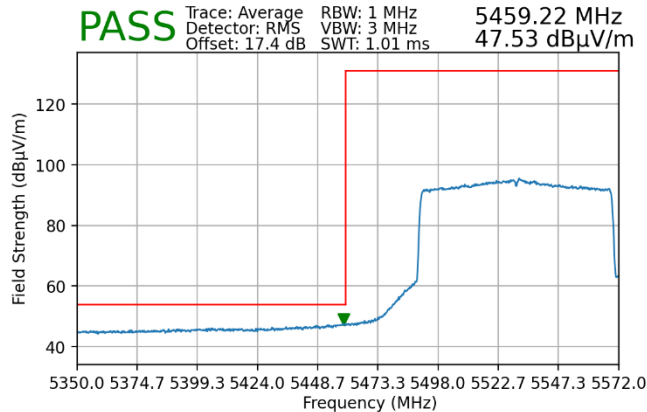


**Plot 7-170. Radiated Lower Band Edge Plot MIMO (Average - UNII Band 2C - 996 Tones)**

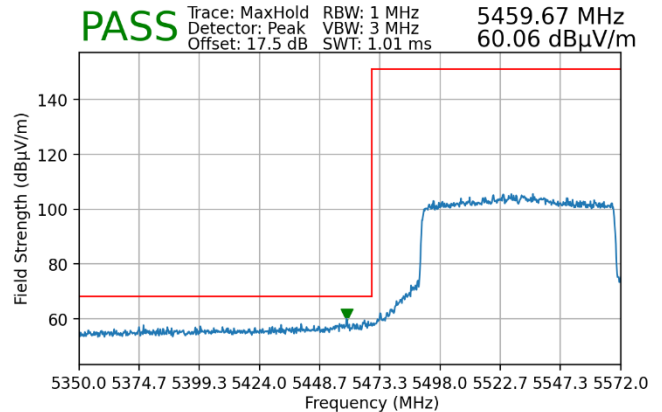

**Plot 7-171. Radiated Lower Band Edge Plot MIMO (Peak - UNII Band 2C - 996 Tones)**


|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ax |
| Worst Case Transfer Rate: | MCS0     |
| RU Index:                 | 67       |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5775MHz  |
| Channel:                  | 155      |

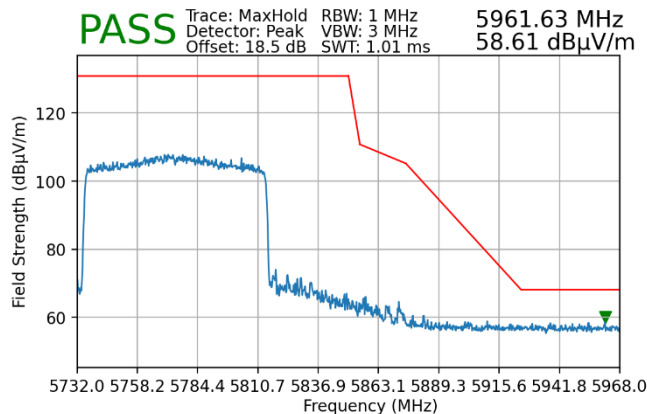

**Plot 7-172. Radiated Upper Band Edge Plot MIMO (Peak - UNII Band 3 - 996 Tones)**


|                                         |                                        |                              |                                   |
|-----------------------------------------|----------------------------------------|------------------------------|-----------------------------------|
| FCC ID: A3LSMX930<br>IC: 649E-SMX930    | MEASUREMENT REPORT                     |                              | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2505130048-06.A3L | Test Dates:<br>05/13/2025 - 07/18/2025 | EUT Type:<br>Portable Tablet | Page 135 of 146                   |

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ax |
| Worst Case Transfer Rate: | MCS0     |
| RU Index:                 | 67       |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5855MHz  |
| Channel:                  | 171      |

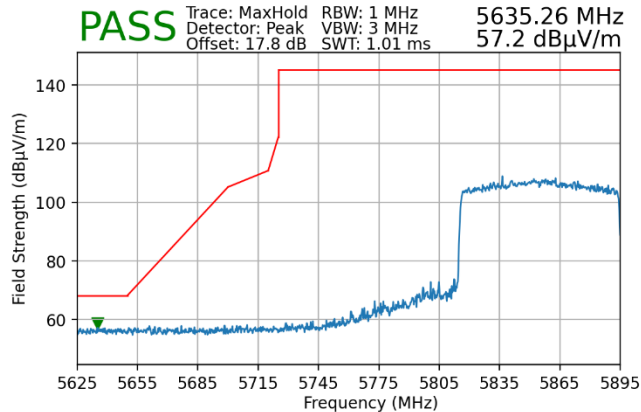


**Plot 7-173. Radiated Lower Band Edge Plot MIMO  
(Peak - UNII Band 4 - 996 Tones)**

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ax |
| Worst Case Transfer Rate: | MCS0     |
| RU Index:                 | 67       |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5855MHz  |
| Channel:                  | 171      |

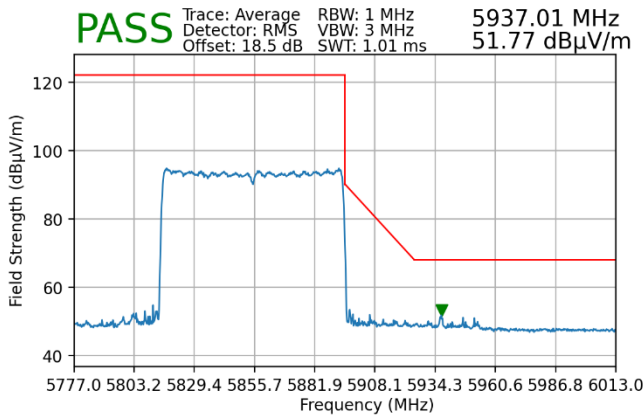

**Plot 7-174. Radiated Upper Band Edge Plot MIMO  
(Average - UNII Band 4 - 996 Tones)**

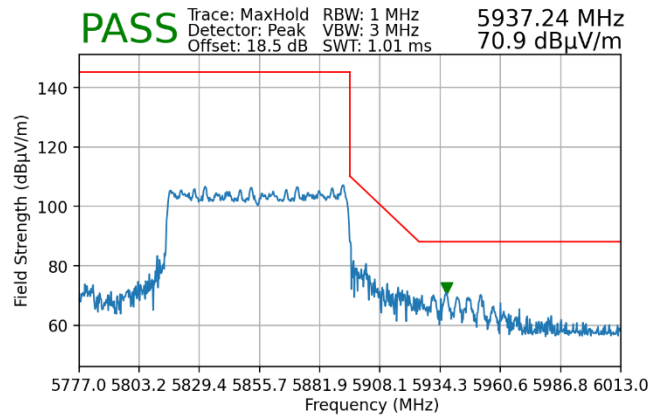


**Plot 7-175. Radiated Upper Band Edge Plot MIMO  
(Peak - UNII Band 4 - 996 Tones)**

|                                         |                                        |                              |                                   |
|-----------------------------------------|----------------------------------------|------------------------------|-----------------------------------|
| FCC ID: A3LSMX930<br>IC: 649E-SMX930    | MEASUREMENT REPORT                     |                              | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2505130048-06.A3L | Test Dates:<br>05/13/2025 - 07/18/2025 | EUT Type:<br>Portable Tablet | Page 136 of 146                   |




## 7.6.7 MIMO Radiated Band Edge Measurements (80MHz BW – Partial Tone – 484+242T)

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11be |
| Worst Case Transfer Rate: | MCS0     |
| RU Index:                 | 93       |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5210MHz  |
| Channel:                  | 42       |

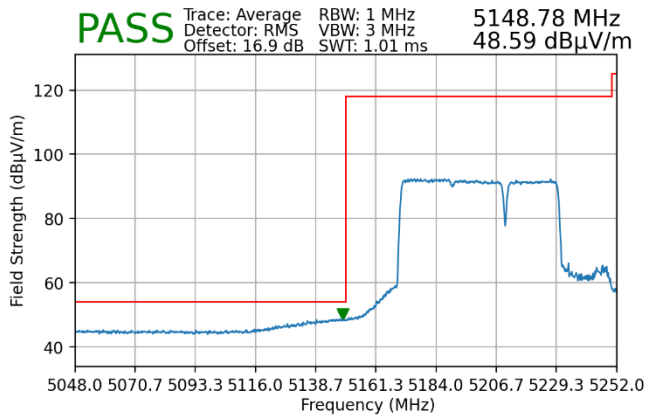


**Plot 7-176. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1 – 484+242 Tones)**

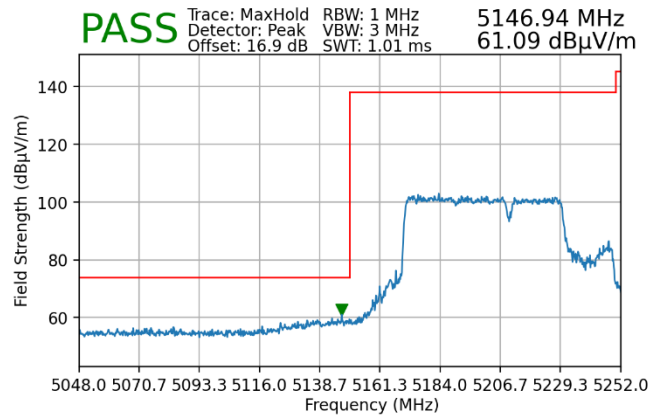


**Plot 7-177. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1 – 484+242 Tones)**

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11be |
| Worst Case Transfer Rate: | MCS0     |
| RU Index:                 | 90       |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5290MHz  |
| Channel:                  | 58       |

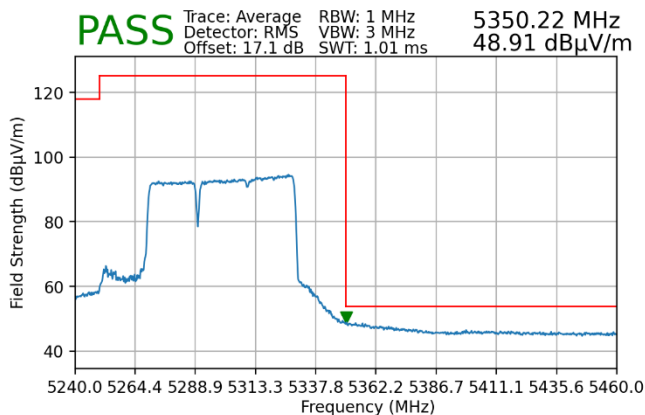


**Plot 7-178. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A – 484+242 Tones)**

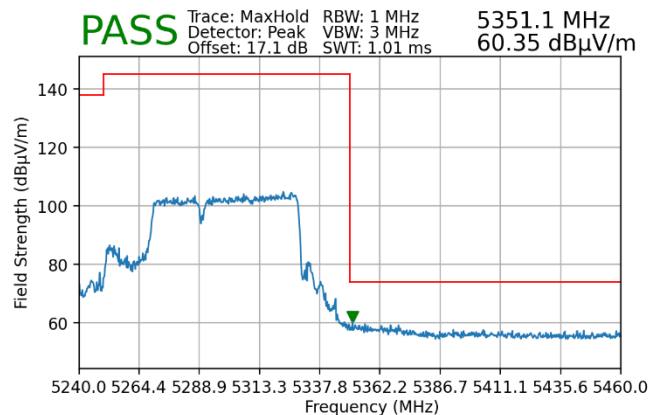


**Plot 7-179. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A – 484+242 Tones)**

|                                         |                                        |                              |                                   |
|-----------------------------------------|----------------------------------------|------------------------------|-----------------------------------|
| FCC ID: A3LSMX930<br>IC: 649E-SMX930    | MEASUREMENT REPORT                     |                              | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2505130048-06.A3L | Test Dates:<br>05/13/2025 - 07/18/2025 | EUT Type:<br>Portable Tablet | Page 137 of 146                   |

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11be |
| Worst Case Transfer Rate: | MCS0     |
| RU Index:                 | 93       |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5530MHz  |
| Channel:                  | 106      |

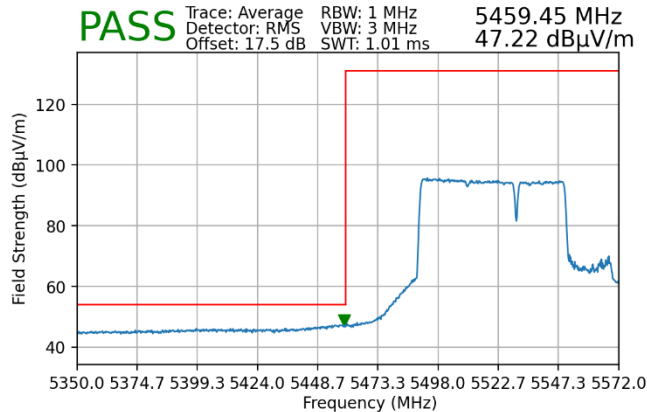


**Plot 7-180. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C – 484+242 Tones)**

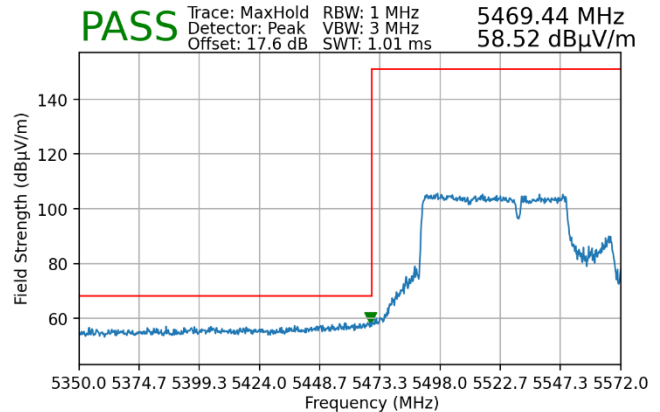

**Plot 7-181. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C – 484+242 Tones)**


|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11be |
| Worst Case Transfer Rate: | MCS0     |
| RU Index:                 | 90       |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5775MHz  |
| Channel:                  | 155      |

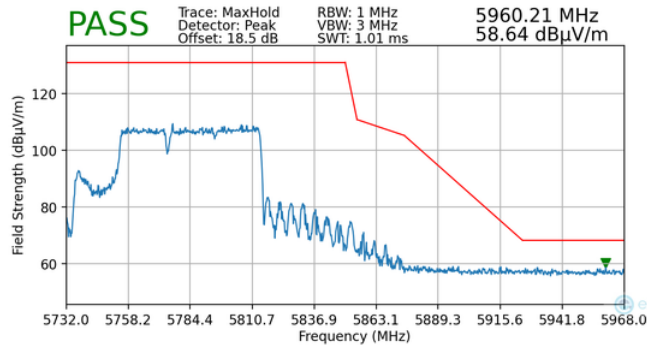

**Plot 7-182. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 3 – 484+242 Tones)**


|                                         |                                        |                              |                                   |
|-----------------------------------------|----------------------------------------|------------------------------|-----------------------------------|
| FCC ID: A3LSMX930<br>IC: 649E-SMX930    | MEASUREMENT REPORT                     |                              | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2505130048-06.A3L | Test Dates:<br>05/13/2025 - 07/18/2025 | EUT Type:<br>Portable Tablet | Page 138 of 146                   |

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11be |
| Worst Case Transfer Rate: | MCS0     |
| RU Index:                 | 93       |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5855MHz  |
| Channel:                  | 171      |

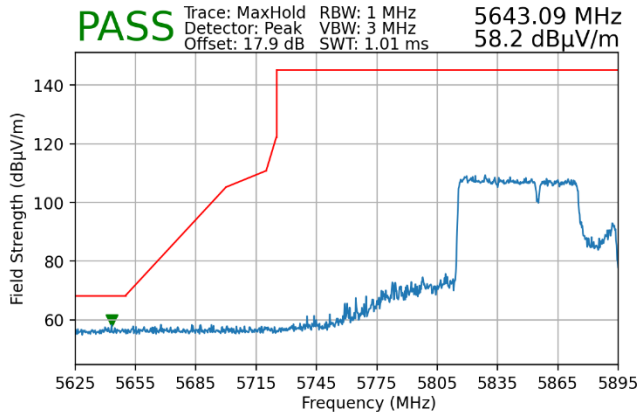


**Plot 7-183. Radiated Lower Band Edge Plot MIMO  
(Peak – UNII Band 4 – 484+242 Tones)**

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11be |
| Worst Case Transfer Rate: | MCS0     |
| RU Index:                 | 90       |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5855MHz  |
| Channel:                  | 171      |

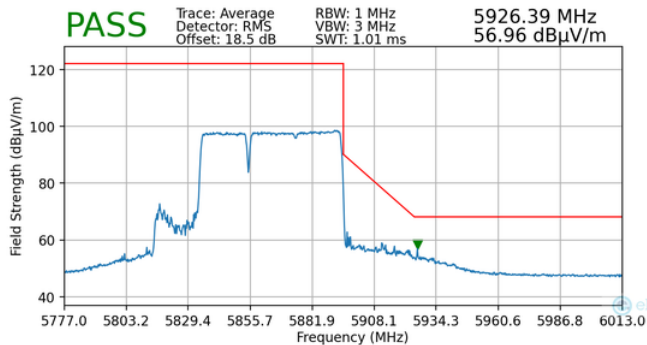

**Plot 7-184. Radiated Upper Band Edge Plot MIMO  
(Average – UNII Band 4 – 484+242 Tones)**

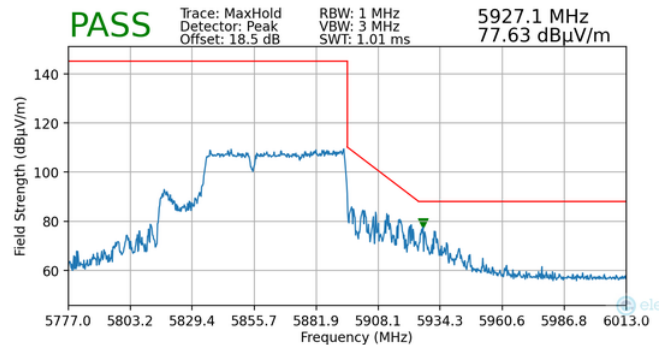


**Plot 7-185. Radiated Upper Band Edge Plot MIMO  
(Peak – UNII Band 4 – 484+242 Tones)**


|                                         |                                        |                              |                                   |
|-----------------------------------------|----------------------------------------|------------------------------|-----------------------------------|
| FCC ID: A3LSMX930<br>IC: 649E-SMX930    | MEASUREMENT REPORT                     |                              | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2505130048-06.A3L | Test Dates:<br>05/13/2025 - 07/18/2025 | EUT Type:<br>Portable Tablet | Page 139 of 146                   |

## 7.6.8 MIMO Radiated Band Edge Measurements (160MHz BW – Full Tone – 2x996T)

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ax |
| Worst Case Transfer Rate: | MCS0     |
| RU Index:                 | 67       |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5250MHz  |
| Channel:                  | 50       |

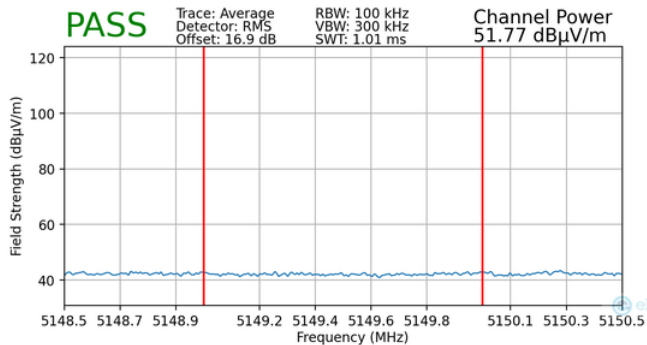


**Plot 7-186. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1 – 2x996 Tones)**

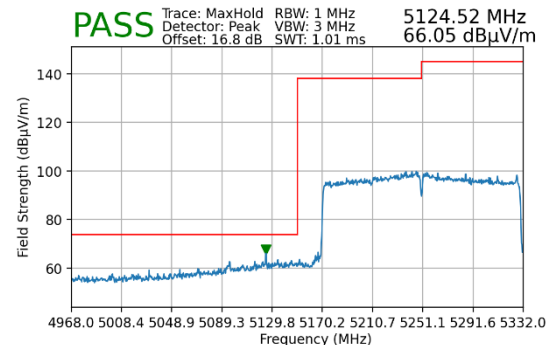


**Plot 7-187. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1 – 2x996 Tones)**

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ax |
| Worst Case Transfer Rate: | MCS0     |
| RU Index:                 | 67       |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5250MHz  |
| Channel:                  | 50       |

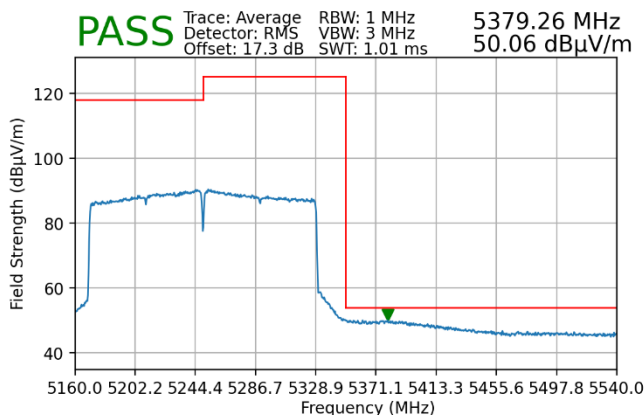


**Plot 7-188. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A – 2x996 Tones)**

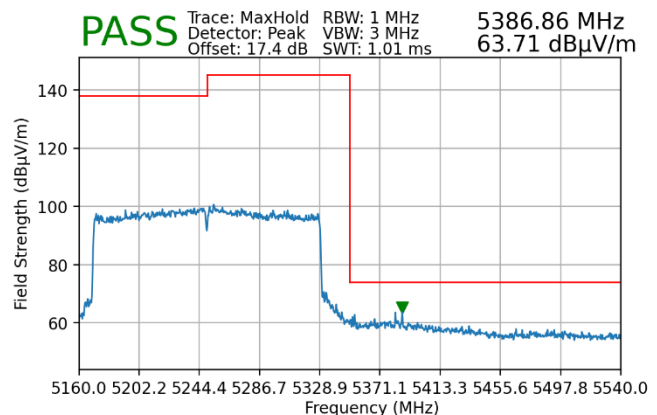


**Plot 7-189. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A – 2x996 Tones)**

|                                         |                                        |                              |                                   |
|-----------------------------------------|----------------------------------------|------------------------------|-----------------------------------|
| FCC ID: A3LSMX930<br>IC: 649E-SMX930    | MEASUREMENT REPORT                     |                              | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2505130048-06.A3L | Test Dates:<br>05/13/2025 - 07/18/2025 | EUT Type:<br>Portable Tablet | Page 140 of 146                   |

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11ax |
| Worst Case Transfer Rate: | MCS0     |
| RU Index:                 | 67       |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5570MHz  |
| Channel:                  | 114      |

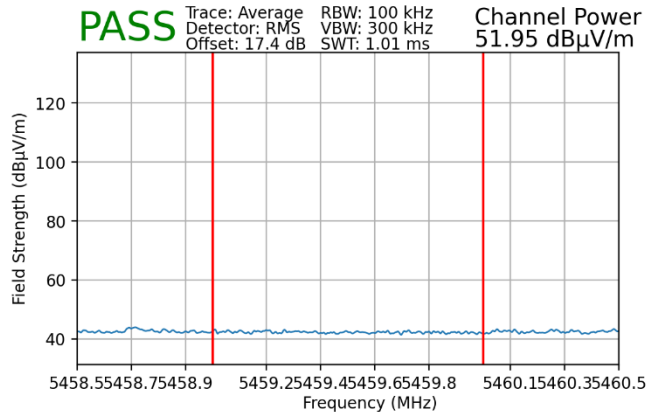


**Plot 7-190. Radiated Lower Band Edge Plot MIMO  
(Average – UNII Band 2C – 2x996 Tones)**

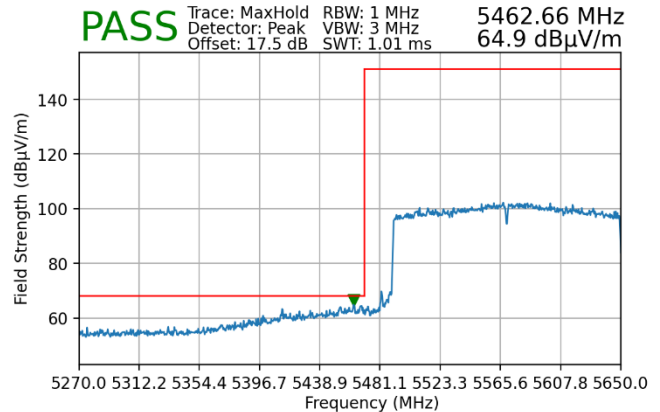

**Plot 7-191. Radiated Lower Band Edge Plot MIMO  
(Peak – UNII Band 2C – 2x996 Tones)**


|                                         |                                        |                              |                                   |
|-----------------------------------------|----------------------------------------|------------------------------|-----------------------------------|
| FCC ID: A3LSMX930<br>IC: 649E-SMX930    | MEASUREMENT REPORT                     |                              | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2505130048-06.A3L | Test Dates:<br>05/13/2025 - 07/18/2025 | EUT Type:<br>Portable Tablet | Page 141 of 146                   |

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS0  
 RU Index: 67  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5815MHz  
 Channel: 163

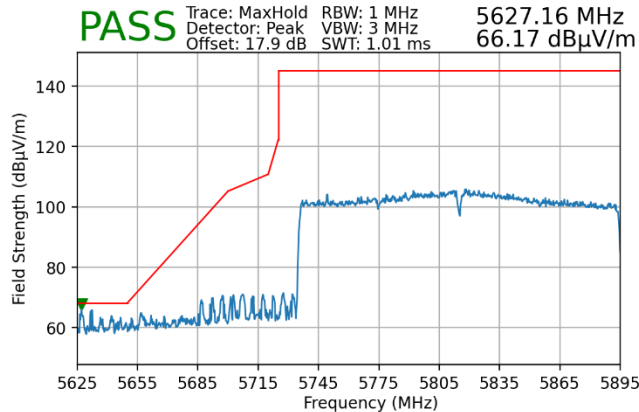


**Plot 7-192. Radiated Lower Band Edge Plot MIMO (Peak - UNII Band 4 - 2x996 Tones)**

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS0  
 RU Index: 67  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5815MHz  
 Channel: 163

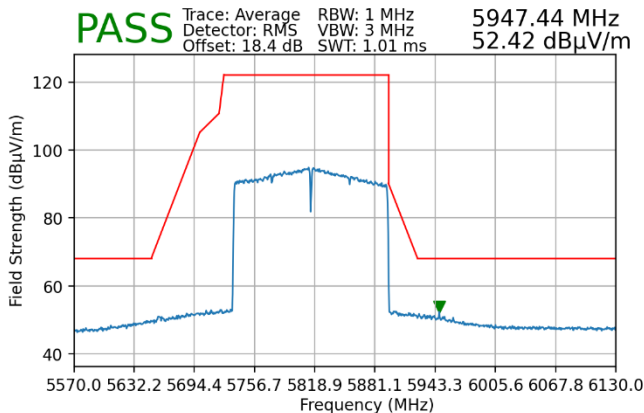

**Plot 7-193. Radiated Upper Band Edge Plot MIMO (Average - UNII Band 4 - 2x996 Tones)**

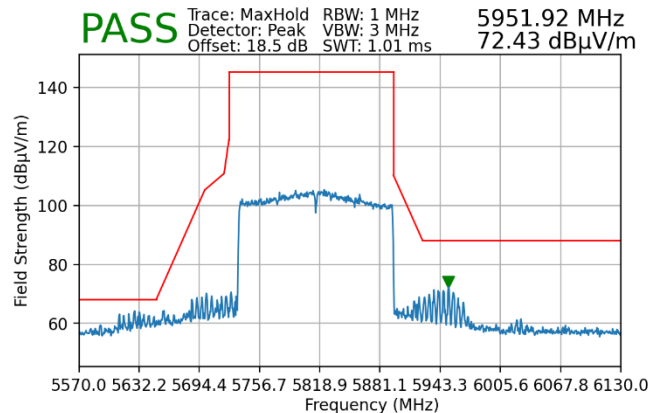


**Plot 7-194. Radiated Upper Band Edge Plot MIMO (Peak - UNII Band 4 - 2x996 Tones)**


|                                         |                                        |                              |                                   |
|-----------------------------------------|----------------------------------------|------------------------------|-----------------------------------|
| FCC ID: A3LSMX930<br>IC: 649E-SMX930    | MEASUREMENT REPORT                     |                              | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2505130048-06.A3L | Test Dates:<br>05/13/2025 - 07/18/2025 | EUT Type:<br>Portable Tablet | Page 142 of 146                   |

## 7.6.9 MIMO Radiated Band Edge Measurements (160MHz BW – Partial Tone – 996+484T)

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11be |
| Worst Case Transfer Rate: | MCS0     |
| RU Index:                 | 1095     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5250MHz  |
| Channel:                  | 50       |

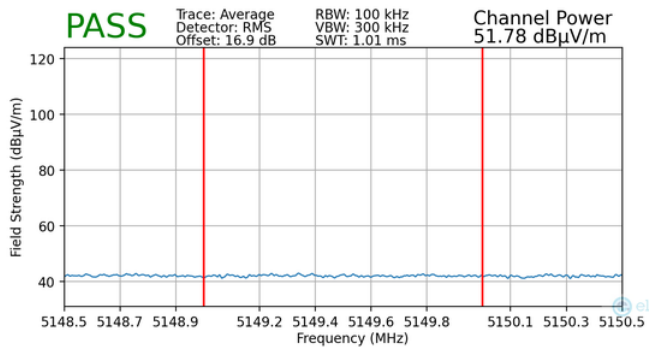


**Plot 7-195. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1 – 996+484 Tones)**

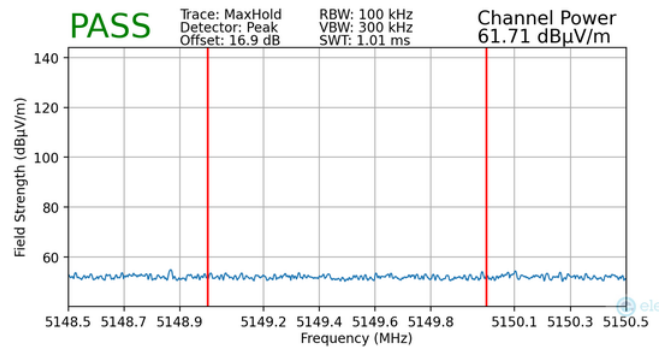


**Plot 7-196. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1 – 996+484 Tones)**

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11be |
| Worst Case Transfer Rate: | MCS0     |
| RU Index:                 | 94       |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5250MHz  |
| Channel:                  | 50       |

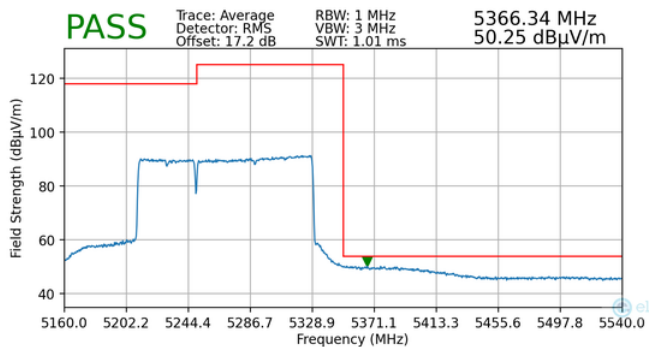


**Plot 7-197. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A – 996+484 Tones)**

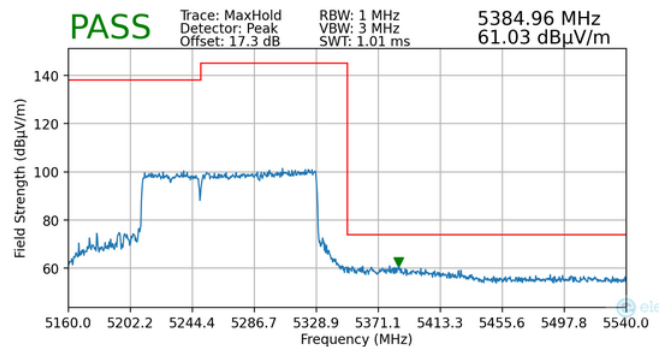


**Plot 7-198. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A – 996+484 Tones)**

|                                         |                                        |                              |                                   |
|-----------------------------------------|----------------------------------------|------------------------------|-----------------------------------|
| FCC ID: A3LSMX930<br>IC: 649E-SMX930    | MEASUREMENT REPORT                     |                              | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2505130048-06.A3L | Test Dates:<br>05/13/2025 - 07/18/2025 | EUT Type:<br>Portable Tablet | Page 143 of 146                   |

|                           |          |
|---------------------------|----------|
| Worst Case Mode:          | 802.11be |
| Worst Case Transfer Rate: | MCS0     |
| RU Index:                 | 1095     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 5570MHz  |
| Channel:                  | 114      |

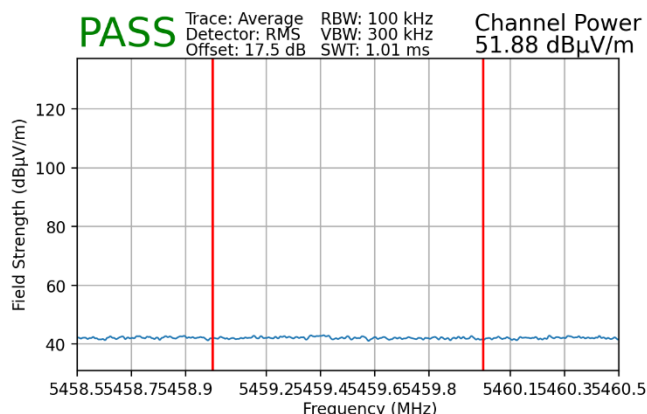

**Plot 7-199. Radiated Lower Band Edge Plot MIMO  
(Average – UNII Band 2C – 996+484 Tones)**

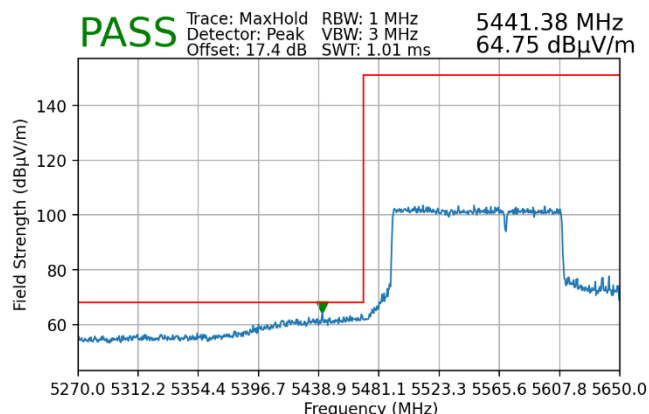

**Plot 7-200. Radiated Lower Band Edge Plot MIMO  
(Peak – UNII Band 2C – 996+484 Tones)**

|                                         |                                        |                              |                                   |
|-----------------------------------------|----------------------------------------|------------------------------|-----------------------------------|
| FCC ID: A3LSMX930<br>IC: 649E-SMX930    | MEASUREMENT REPORT                     |                              | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1M2505130048-06.A3L | Test Dates:<br>05/13/2025 - 07/18/2025 | EUT Type:<br>Portable Tablet | Page 144 of 146                   |