

**ELEMENT WASHINGTON DC LLC**

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.381.1520

<http://www.element.com>**MEASUREMENT REPORT****FCC PART 15.247 / ISSED RSS-247 802.11b/g/n/ac/ax/be (OFDM)****Applicant Name:**

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

05/13/2025 - 07/01/2025

Test Report Issue Date:

07/08/2025

Test Site/Location:

Element Lab., Columbia, MD, USA

Test Report Serial No.:

1M2505130048-03.A3L

FCC ID:**A3LSMX930****IC:****649E-SMX930****APPLICANT:****Samsung Electronics Co., Ltd.****Application Type:**

Certification

Model/HVIN:

SM-X930

EUT Type:

Portable Tablet

Frequency Range:

2412 – 2472MHz

Modulation Type:

CCK, DSSS, OFDM

FCC Classification:

Digital Transmission System (DTS)

FCC Rule Part(s):

Part 15 Subpart C (15.247)

ISED Specification(s)

RSS-247 Issue 3

Test Procedure(s):

ANSI C63.10:2020

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10:2020. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez
Executive Vice President



FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 1 of 85

TABLE OF CONTENTS

1.0	INTRODUCTION.....	4
1.1	Scope	4
1.2	Element Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION	5
2.1	Equipment Description	5
2.2	Device Capabilities	5
2.3	Test Configuration	7
2.4	Antenna Description	7
2.5	Software and Firmware	7
2.6	EMI Suppression Device(s) / Modifications	7
3.0	DESCRIPTION OF TESTS	8
3.1	Evaluation Procedure	8
3.2	AC Line Conducted Emissions	8
3.3	Radiated Emissions.....	9
3.4	Environmental Conditions.....	9
4.0	ANTENNA REQUIREMENTS	10
5.0	MEASUREMENT UNCERTAINTY.....	11
6.0	TEST EQUIPMENT CALIBRATION DATA.....	12
7.0	TEST RESULTS.....	14
7.1	Summary	14
7.2	6dB Bandwidth Measurement	15
7.3	Output Power Measurement.....	29
7.4	Power Spectral Density	32
7.5	Conducted Band Edge Emissions	47
7.6	Conducted Spurious Emissions.....	64
7.7	Radiated Emission Measurements.....	72
7.8	Line-Conducted Test Data.....	82
8.0	CONCLUSION	85

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 2 of 85

MEASUREMENT REPORT

Channel Bandwidth [MHz]	IEEE Mode	Tx Frequency [MHz]	MIMO			
			Avg. Conducted		Peak Conducted	
			Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]
20	802.11b	2412 - 2472	148.94	21.73	288.44	24.60
	802.11g	2412 - 2472	88.72	19.48	500.69	27.00
	802.11n	2412 - 2472	89.95	19.54	519.92	27.16
	802.11ax	2412 - 2472	92.47	19.66	590.39	27.71
	802.11be	2412 - 2472	92.04	19.64	537.03	27.30

EUT Overview

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 3 of 85

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

Measurements were conducted at the Element laboratory(ies) indicated in Section 1.3 below. All measurement facilities are compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 4 of 85

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Tablet FCC ID: A3LSMX930, IC: 649E-SMX930**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN (DTS) transmitter.

Test Device Serial No.: 08W8P, 08WMW, 08W4T, 08WPT, 031MF, 033AD

2.2 Device Capabilities

This device contains the following capabilities:

802.11 b/g/n/ac/ax/be WLAN, 802.11 a/n/ac/ax/be UNII (5 and 6GHz), BT (1x, EDR, LE), Digitizer

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	12	2467
		13	2472

Table 2-1. Frequency \ Channel Operations

Notes:

1. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of ANSI C63.10:2020. The RBW and VBW were both greater than 50\T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

802.11 Mode/Band		MIMO (1+2)	
		Duty Cycle [%]	Radiated DCCF [dB]
2.4GHz	b	98.54	N/A
	g	98.25	N/A
	n (HT20)	99.14	N/A
	ac (VHT20)	98.41	N/A
	ax (HE20)	98.06	N/A
	be (EHT20)	98.15	N/A

Table 2-2. Measured Duty Cycles

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 5 of 85

2. The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM		CDD	
		ANT1	ANT2	ANT1	ANT2	ANT1	ANT2
2.4GHz	11b	✓	✓	✓	✓	✓	✓
2.4GHz	11g	✓	✓	✓	✓	✓	✓
2.4GHz	11n	✓	✓	✓	✓	✓	✓
2.4GHz	11ac	✓	✓	✓	✓	✓	✓
2.4GHz	11ax	✓	✓	✓	✓	✓	✓
2.4GHz	11be	✓	✓	✓	✓	✓	✓

Table 2-3. Antenna / Technology Configuration

✓ = Support; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

CDD = Cyclic Delay Diversity - 2Tx Function

3. The device supports the following data rates (shown in Mbps):

802.11b	802.11a/g	MCS Index		Spatial Stream	OFDM (802.11n)		OFDM (802.11ax/be)		
20MHz	20MHz	HT	HE		20MHz		20MHz		
					0.8μs GI	0.4μs GI	0.8μs GI	1.6μs GI	3.2μs GI
1	6	0	0	1	6.5	7.2	8.6	8.1	7.3
2	9	1	1	1	13	14.4	17.2	16.3	14.6
5.5	12	2	2	1	19.5	21.7	25.8	24.4	21.9
11	18	3	3	1	26	28.9	34.4	32.5	29.3
	24	4	4	1	39	43.3	51.6	48.8	43.9
	36	5	5	1	52	57.8	68.8	65	58.5
	48	6	6	1	58.5	65	77.4	73.1	65.8
	54	7	7	1	65	72.2	86	81.3	73.1
			8	1			103.2	97.5	87.8
			9	1			114.7	108.3	97.5
			10	1			129	121.9	109.7
			11	1			143.4	135.4	121.9
1	6	8	0	2	13	14.4	17.2	16.3	14.6
2	9	9	1	2	26	28.9	34.4	32.5	29.3
5.5	12	10	2	2	39	43.3	51.6	48.8	43.9
11	18	11	3	2	52	57.8	68.8	65	58.5
	24	12	4	2	78	86.7	103.2	97.5	87.8
	36	13	5	2	104	115.6	137.6	130	117
	48	14	6	2	117	130	154.9	146.3	131.6
	54	15	7	2	130	144.4	172.1	162.5	146.3
			8	2	156	173.3	206.5	195	175.5
			9	2	N/A	N/A	229.4	216.7	195
			10	2			258.1	243.8	219.4
			11	2			286.8	270.8	243.8

Table 2-4. Supported Data Rates

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 6 of 85

2.3 Test Configuration

ANSI C63.10:2020 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 7.8 for AC line conducted emissions test setups, 7.7 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5, and 7.6 for antenna port conducted emissions test setups.

2.4 Antenna Description

The following antenna gains were used for the testing.

Frequency [GHz]	Antenna-1 Gain [dBi]	Antenna-2 Gain [dBi]	Directional Gain [dBi]
2.4	-9.35	-4.70	-3.71

Table 2-5. Antenna Peak Gain

2.5 Software and Firmware

The test was conducted with software/firmware version X930XXU0AYF2 installed on the EUT.

2.6 EMI Suppression Device(s) / Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 7 of 85

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10:2020) was used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.8. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 8 of 85

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 9 of 85

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules\Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connections to an external antenna.

Conclusion:

The EUT unit complies with the requirement of §15.203.

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 10 of 85

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10:2020. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

Table 5-1. Measurement Uncertainty Budget

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 11 of 85

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	WL25-1	Conducted Cable Set (25GHz)	2/25/2025	Annual	2/25/2026	WL25-1
-	WL25-2	Conducted Cable Set (25GHz)	2/25/2025	Annual	2/25/2026	WL25-2
-	WL40-1	Conducted Cable Set (40GHz)	2/25/2025	Annual	2/25/2026	WL40-1
-	MD 1M 18-40	EMC Cable and Switch System	2/25/2025	Annual	2/25/2026	MD 1M 18-40
-	AP2-001	EMC Cable and Switch System	2/25/2025	Annual	2/25/2026	AP2-001
-	ETS-001	EMC Cable and Switch System	2/25/2025	Annual	2/25/2026	ETS-001
Agilent	N9038A	MXE EMI Receiver	9/16/2024	Annual	9/16/2025	MY51210133
Agilent	N9020A	MXA Signal Analyzer	5/7/2025	Annual	5/7/2026	US46470561
Agilent	N9030A	PXA Signal Analyzer (44GHz)	10/16/2024	Annual	10/16/2025	MY49430494
Anritsu	MA24408A	Microwave Peak Power Sensor	10/2/2024	Annual	10/2/2025	11675
EMCO	3115	Horn Antenna (1-18GHz)	9/6/2024	Biennial	9/6/2025	9704-5182
EMCO	3116	Horn Antenna (18-40GHz)	7/5/2023	Biennial	7/5/2025	9203-2178
ETS-Lindgren	3116C	Horn Antenna (18-40GHz)	4/22/2025	Biennial	4/22/2027	218893
Keysight Technologies	N9020A	MXA Signal Analyzer	2/7/2025	Annual	2/7/2026	MY53421544
Keysight Technologies	N9030A	PXA Signal Analyzer	8/26/2024	Annual	8/26/2025	MY54490576
Keysight Technologies	N9030B	PXA Signal Analyzer	9/19/2024	Annual	9/19/2025	MY57141001
Pasternack	NMLC-2	Line Conducted Emissions Cable	3/25/2025	Annual	3/25/2026	NMLC-2
Rohde & Schwarz	TC-TA18	Vivaldi Antenna	4/15/2024	Biennial	4/15/2026	101058
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	10/16/2024	Annual	10/16/2025	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	11/25/2024	Annual	11/25/2025	100348
Rohde & Schwarz	ESW44	EMI Test Receiver (44GHz)	3/25/2025	Annual	3/25/2026	101716
Sunol	JB6	Bi-Log Antenna (20M-6GHz)	3/24/2025	Biennial	3/25/2027	A082816
Sunol	JB5	Bi-Log Antenna (20M-5GHz)	9/11/2024	Biennial	9/11/2026	A051107

Table 6-1. Test Equipment Calibration Table

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

Component	Serial Number
MegaPhase Cable TM26-S1S1-36	18160103 003
Pasternack 6dB Attenuator PE7005-6	N/A

Table 6-2. WL25-1 Conducted Cable Set Components

Component	Serial Number
MiniCircuits Cable CBL-2FT-SMSM+	77743
MCL 6dB Attenuator BW-S6W2+	1314

Table 6-3. WL25-2 Conducted Cable Set Components

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 12 of 85

Component	Serial Number
MegaPhase Cable TM40K1K1-36	18160102 001
MCL 10dB Attenuator BW-K10 2W44+	1902

Table 6-4. WL40-1 Conducted Cable Set Components

Component	Serial Number
Pasternak Cable RG214/U	111815
Sucoflex Cable 106A	246420-001
Rohde & Schwarz SF Unit	102134

Table 6-5. ETS-001 EMC Cable and Switch System Components

Component	Serial Number
MiniCircuits Cable CBL-0.5M-SMNM+	47261
Micro-Coax Utiflex Cable UFB311A-Q-3346-50U50U MFR 64639	231978-001
Micro-Coax Utiflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-002
MegaPhase Cable NC29-N1N1-324	19046401 001
MegaPhase Flex Cable 10511-1	15044701-006
Micro-Coas Utiflex Cable UFB311A-Q-3446-50U50U MFR 64639	231978-002
Micro-Coas Utiflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-001
Micro-Coas Utiflex Cable UFB142A-0-0659-50U50U MFR 64639	232069-001
Rohde & Schwarz SF Unit	102138

Table 6-6. AP2-001 EMC Cable and Switch System Components

Component	Serial Number
MegaPhase Cable TM40-K1K1-30	20233002-004
UTIPLEX Cable	64639 232063-001
Rohde & Schwarz Pre-amp RS-PR1840 18G-40G	9037.7670.02

Table 6-7. MD 1M 18-40 EMC Cable and Switch System Components

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 13 of 85

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMX930
 IC: 649E-SMX930
 FCC Classification: Digital Transmission System (DTS)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	RSS-247 [5.2(a)]	6dB Bandwidth	The minimum 6 dB bandwidth shall be at least 500 kHz.	CONDUCTED	PASS	Section 7.2
15.247(b)(3)	RSS-247 [5.4(b)]	Transmitter Output Power	shall not exceed 1 W		PASS	Section 7.3
N/A	RSS-247 [5.4(b)]	e.i.r.p.	shall not exceed 4 W		PASS	Section 7.3
15.247(e)	RSS-247 [5.2(b)]	Transmitter Power Spectral Density	shall not be greater than 8 dBm in any 3 kHz band		PASS	Section 7.4
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	≥ 20dBc		PASS	Sections 7.5, 7.6
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])	RADIATED	PASS	Section 7.7
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits (RSS-Gen [8.8])	LINE CONDUCTED	PASS	Section 7.8

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst-case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “WLAN Automation,” Version 3.5.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “Chamber Automation,” Version 1.3.1.

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 14 of 85

7.2 6dB Bandwidth Measurement

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure Used

ANSI C63.10:2020 – Section 11.8.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 15 of 85


6dB Bandwidth Measurements

Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	MIMO ANT1 Measured Bandwidth [MHz]	MIMO ANT2 Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
2412	1	b	1	7.608	8.116	0.500
2437	6	b	1	8.578	8.120	0.500
2462	11	b	1	8.118	8.119	0.500
2412	1	g	6	15.84	16.36	0.500
2437	6	g	6	15.52	15.93	0.500
2462	11	g	6	15.77	16.34	0.500
2412	1	n/ac	6.5/7.2 (MCS0)	16.59	17.22	0.500
2437	6	n/ac	6.5/7.2 (MCS0)	15.75	16.32	0.500
2462	11	n/ac	6.5/7.2 (MCS0)	16.34	16.95	0.500
2412	1	ax/be	6.5/7.2 (MCS0)	18.80	18.90	0.500
2437	6	ax/be	6.5/7.2 (MCS0)	18.26	18.47	0.500
2462	11	ax/be	6.5/7.2 (MCS0)	18.68	18.74	0.500


Table 7-2. Conducted 6dB Bandwidth Measurements MIMO

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 16 of 85

MIMO 6dB Bandwidth Measurements

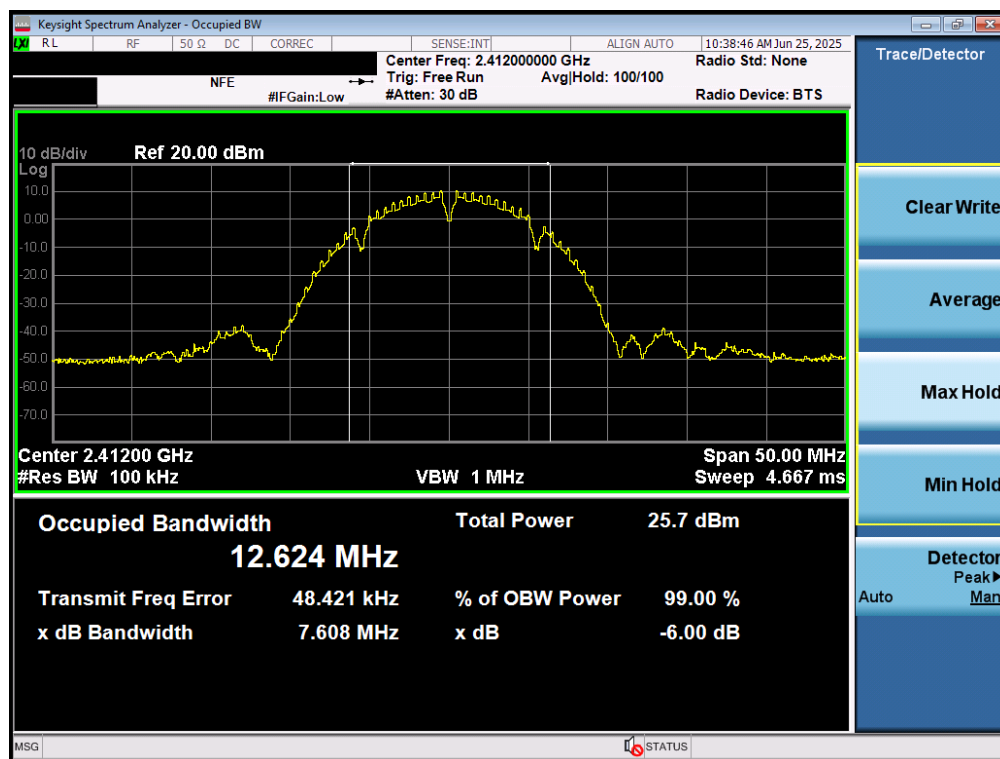


Plot 7-1. 6dB Bandwidth Plot MIMO ANT1 (802.11b – Ch. 1)

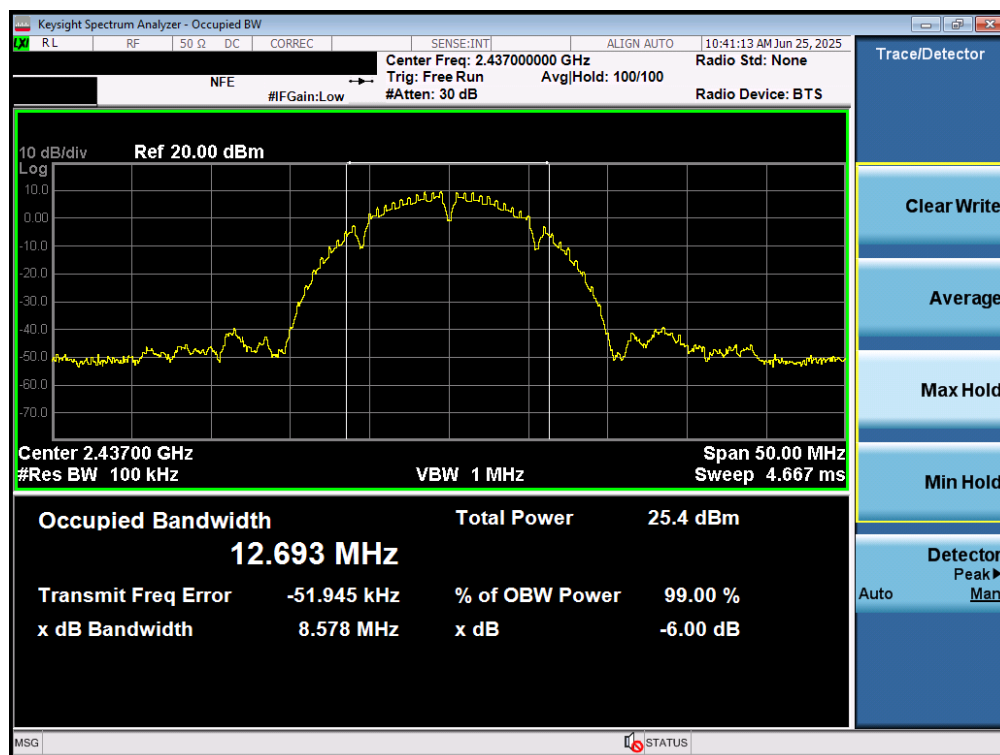


Plot 7-2. 6dB Bandwidth Plot MIMO ANT1 (802.11b – Ch. 6)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 17 of 85

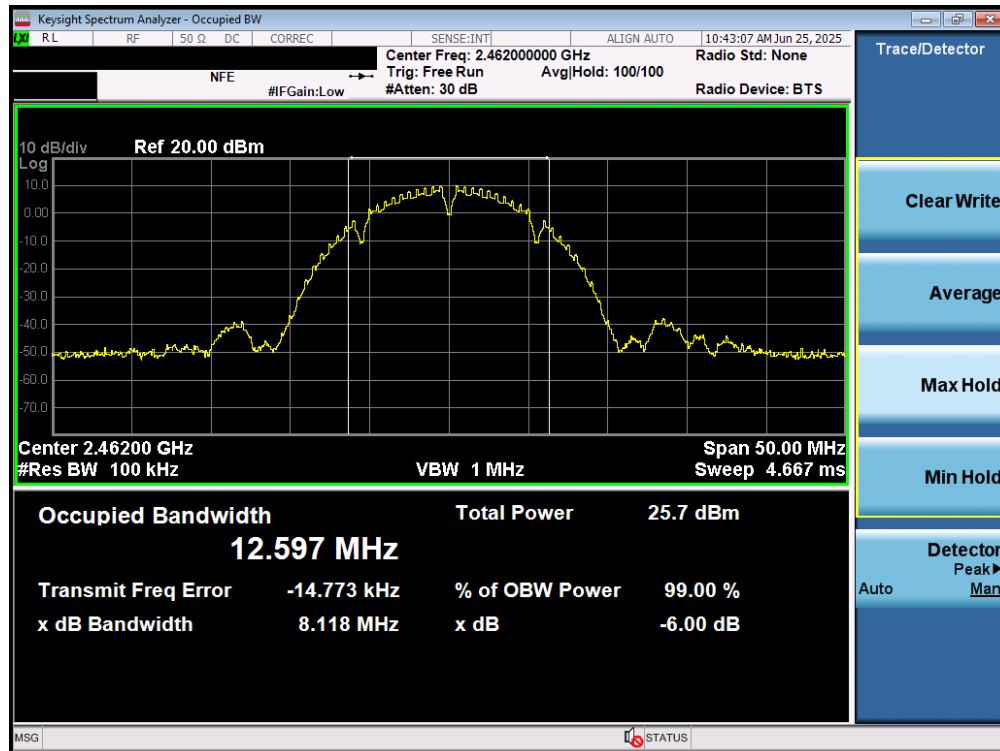


Plot 7-3. 6dB Bandwidth Plot MIMO ANT1 (802.11b – Ch. 11)

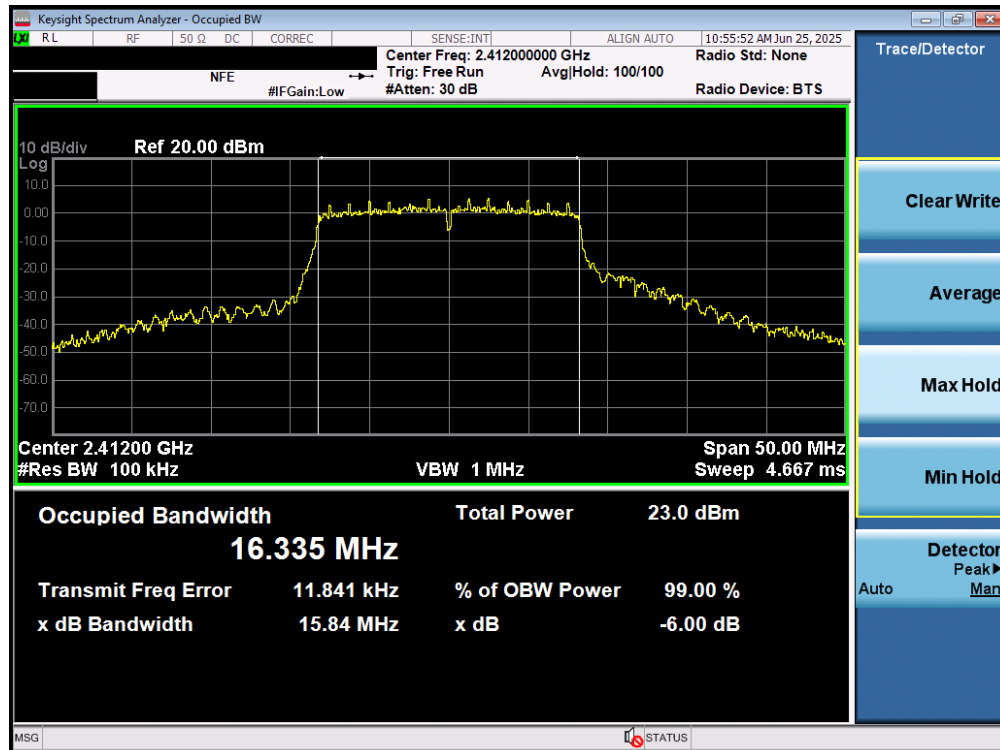


Plot 7-4. 6dB Bandwidth Plot MIMO ANT1 (802.11g – Ch. 1)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 18 of 85

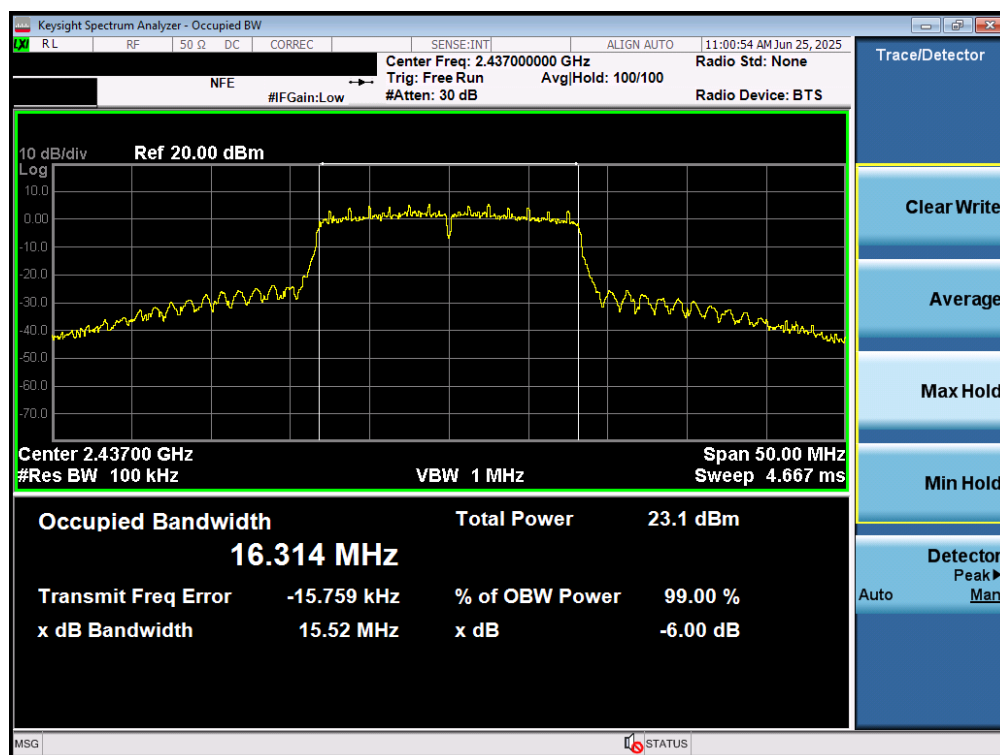

Plot 7-5. 6dB Bandwidth Plot MIMO ANT1 (802.11g – Ch. 6)

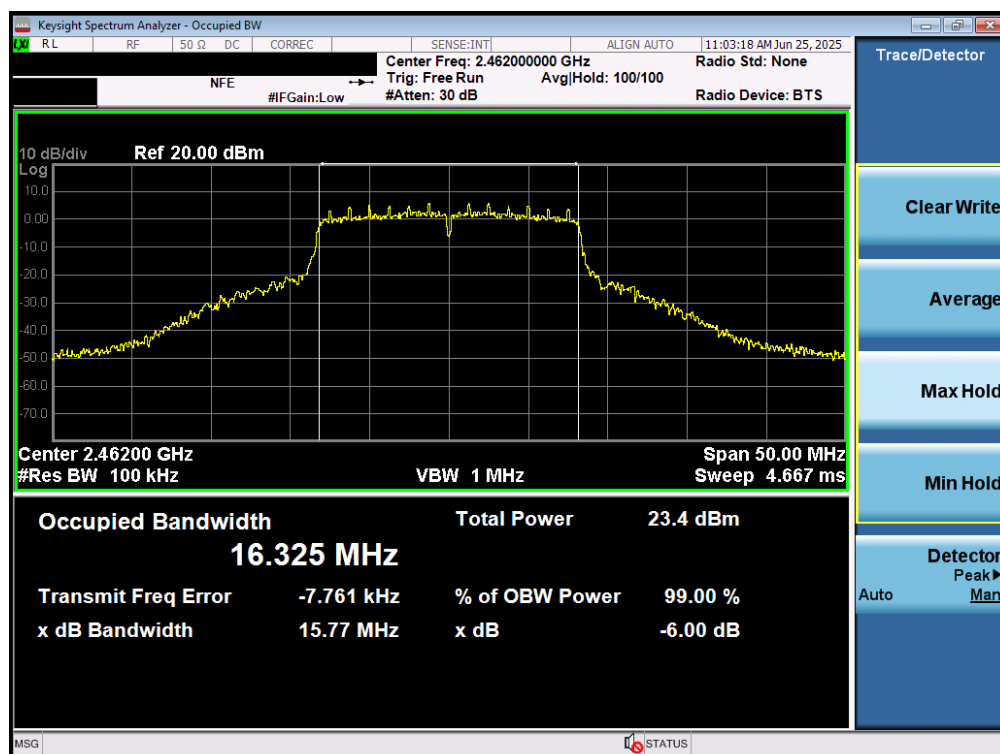


Plot 7-6. 6dB Bandwidth Plot MIMO ANT1 (802.11g – Ch. 11)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 19 of 85




Plot 7-7. 6dB Bandwidth Plot MIMO ANT1 (802.11n/ac (2.4GHz) – Ch. 1)

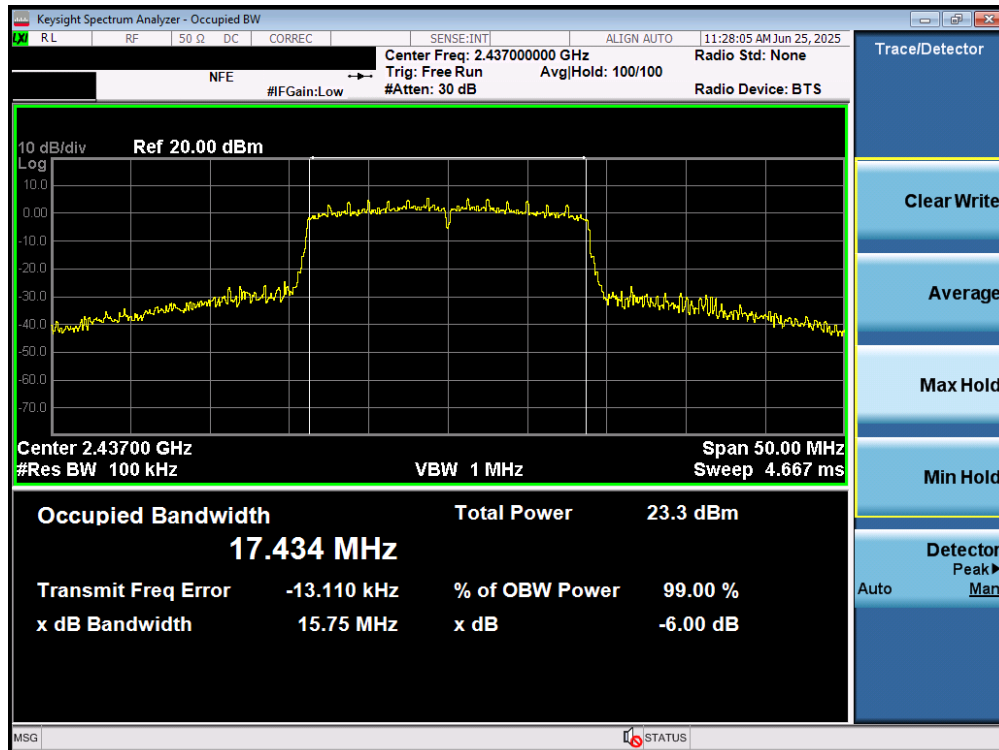

Plot 7-8. 6dB Bandwidth Plot MIMO ANT1 (802.11n/ac (2.4GHz) – Ch. 6)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 20 of 85

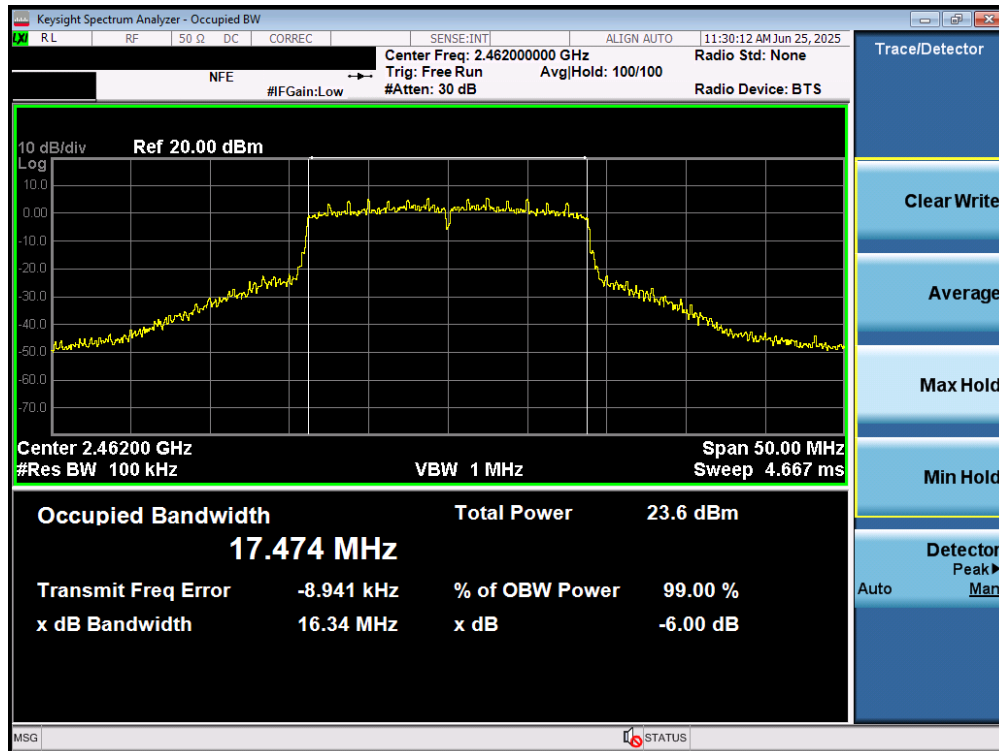


Plot 7-9. 6dB Bandwidth Plot MIMO ANT1 (802.11n/ac (2.4GHz) – Ch. 11)




Plot 7-10. 6dB Bandwidth Plot MIMO ANT1 (802.11ax/be (2.4GHz) – Ch. 1)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 21 of 85

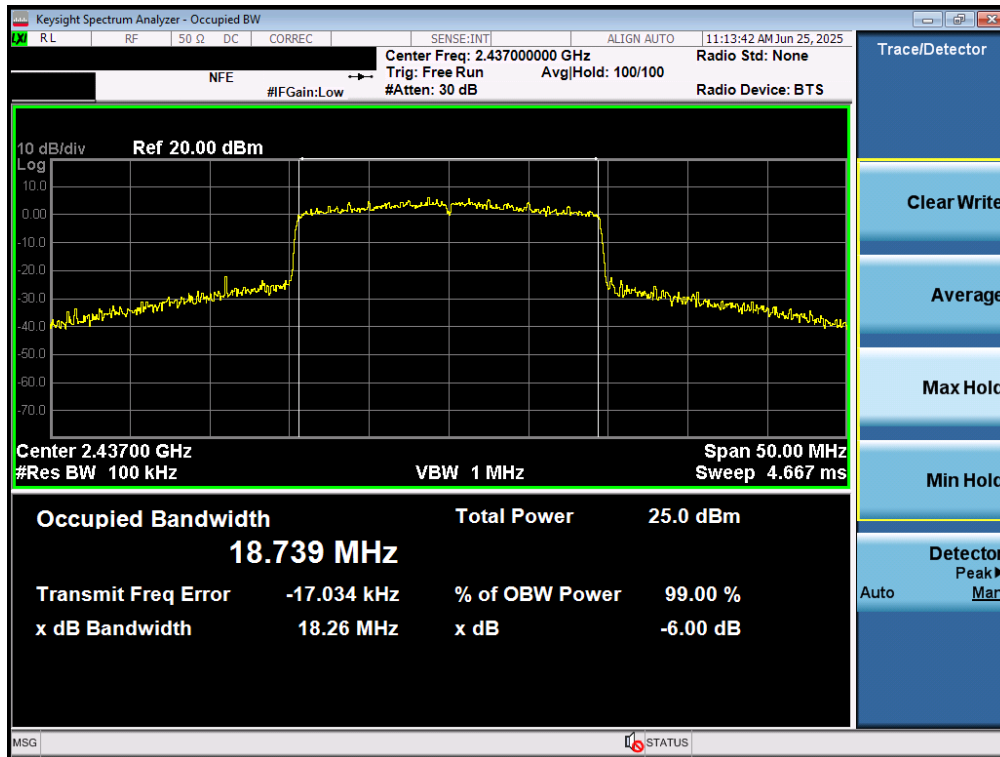


Plot 7-11. 6dB Bandwidth Plot MIMO ANT1 (802.11ax/be (2.4GHz) – Ch. 6)

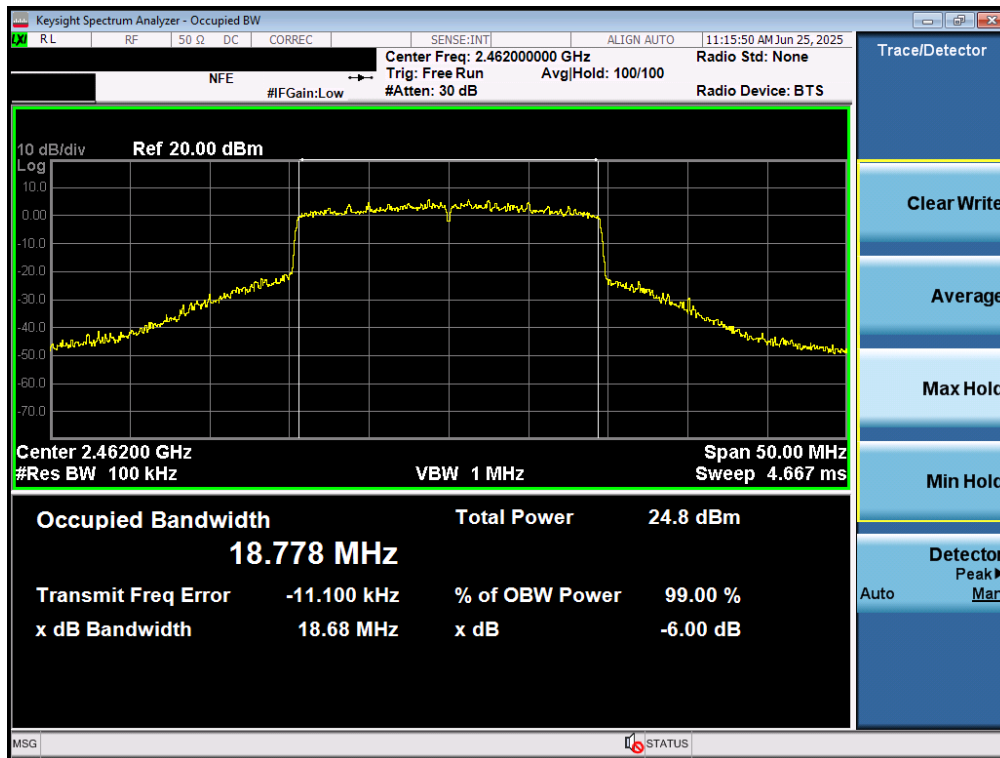


Plot 7-12. 6dB Bandwidth Plot MIMO ANT1 (802.11ax/be (2.4GHz) – Ch. 11)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 22 of 85

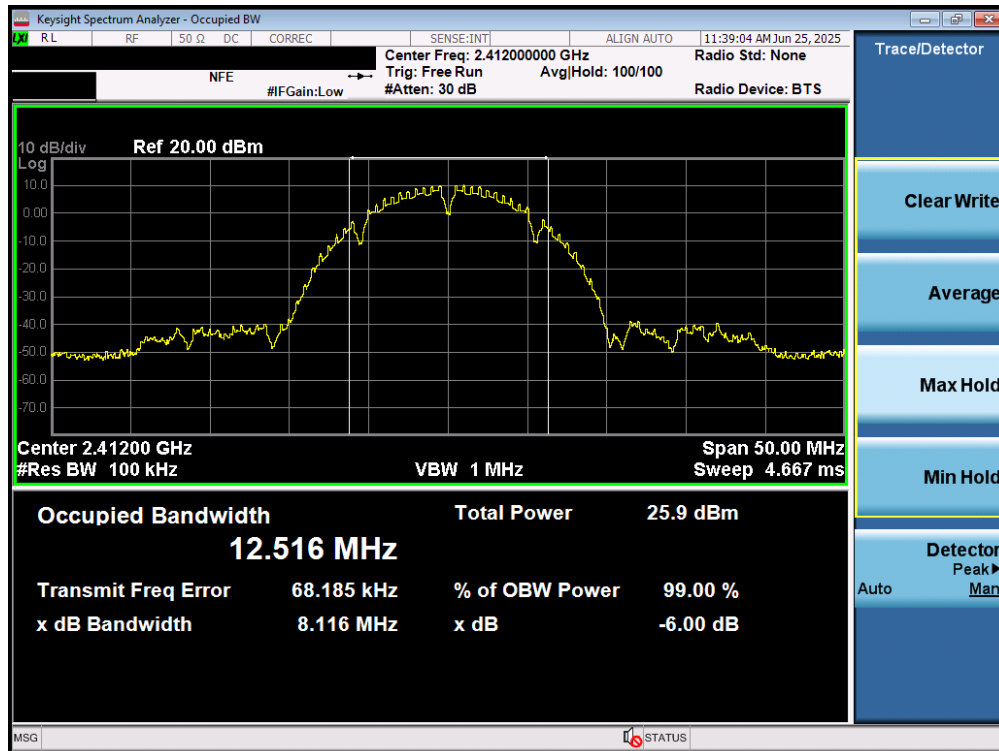


Plot 7-13. 6dB Bandwidth Plot MIMO ANT2 (802.11b – Ch. 1)

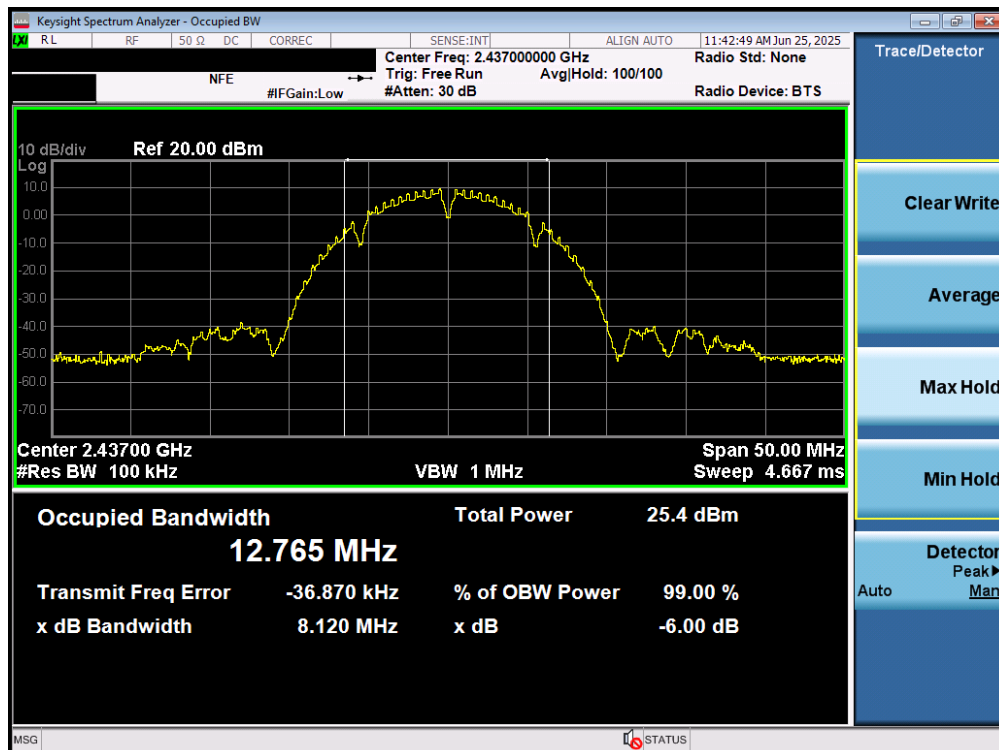


Plot 7-14. 6dB Bandwidth Plot MIMO ANT2 (802.11b – Ch. 6)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 23 of 85

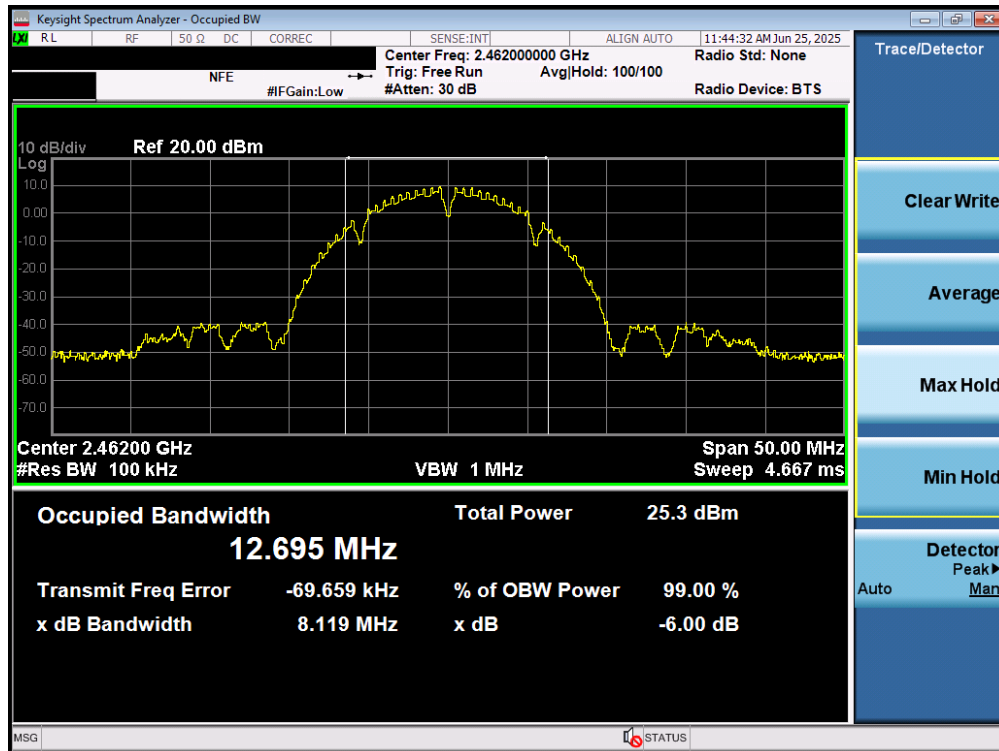


Plot 7-15. 6dB Bandwidth Plot MIMO ANT2 (802.11b – Ch. 11)

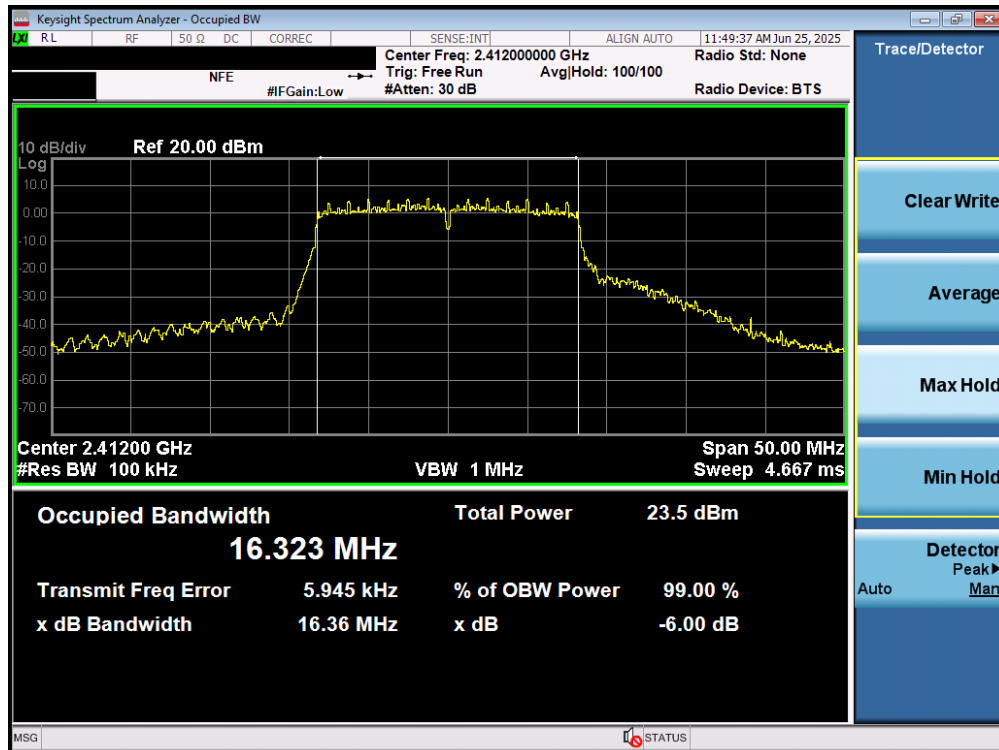


Plot 7-16. 6dB Bandwidth Plot MIMO ANT2 (802.11g – Ch. 1)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 24 of 85

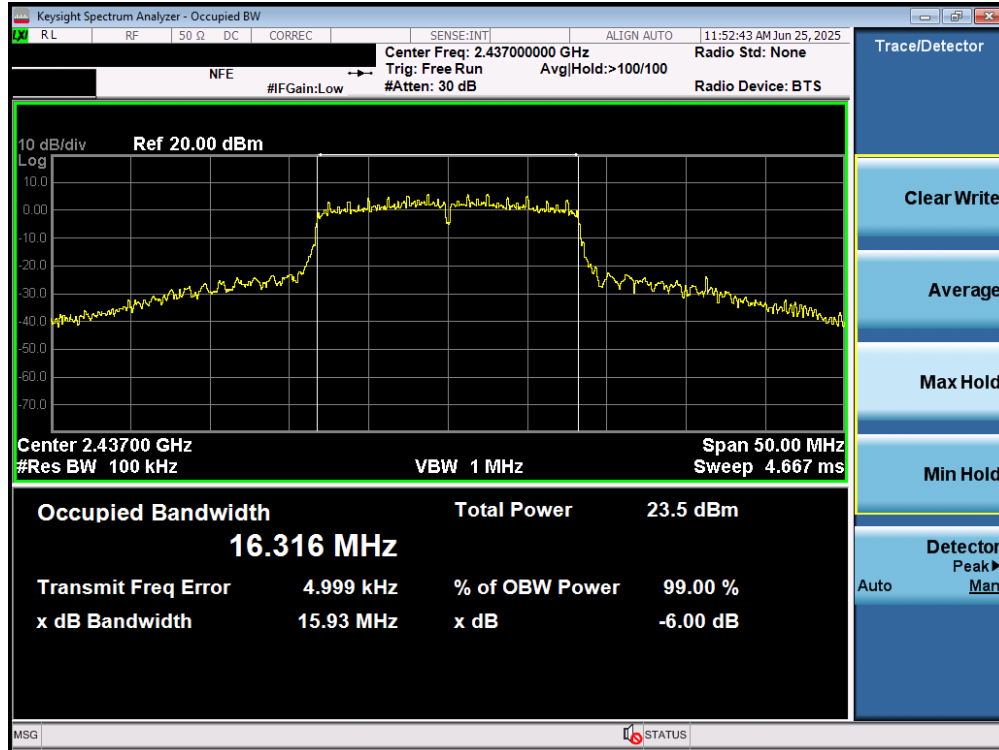


Plot 7-17. 6dB Bandwidth Plot MIMO ANT2 (802.11g – Ch. 6)

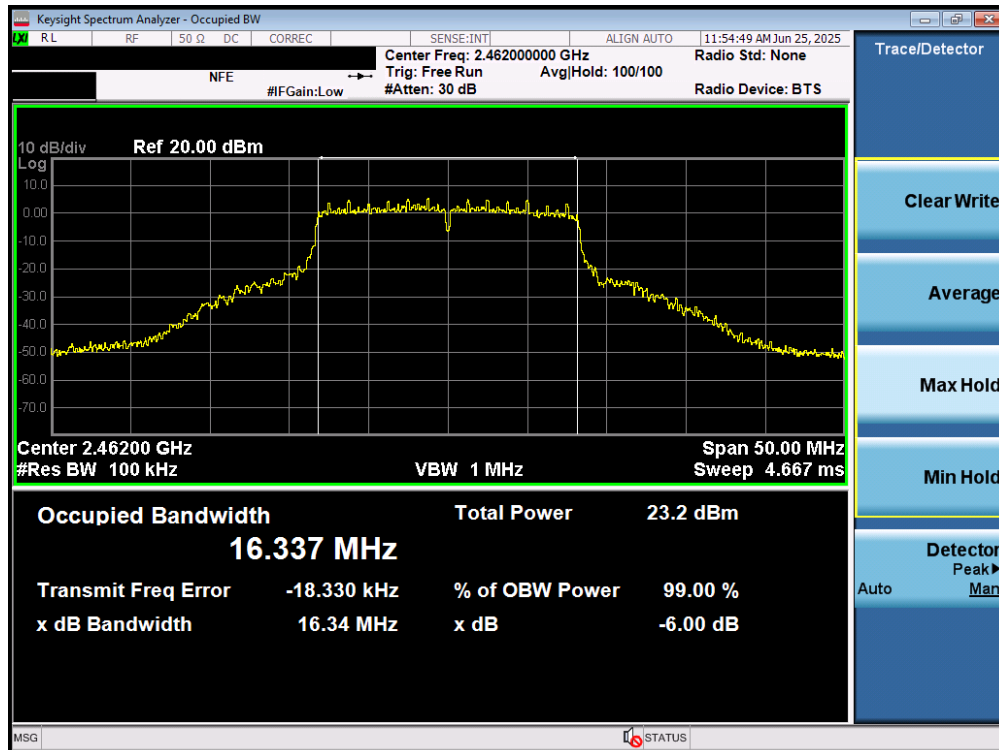


Plot 7-18. 6dB Bandwidth Plot MIMO ANT2 (802.11g – Ch. 11)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 25 of 85

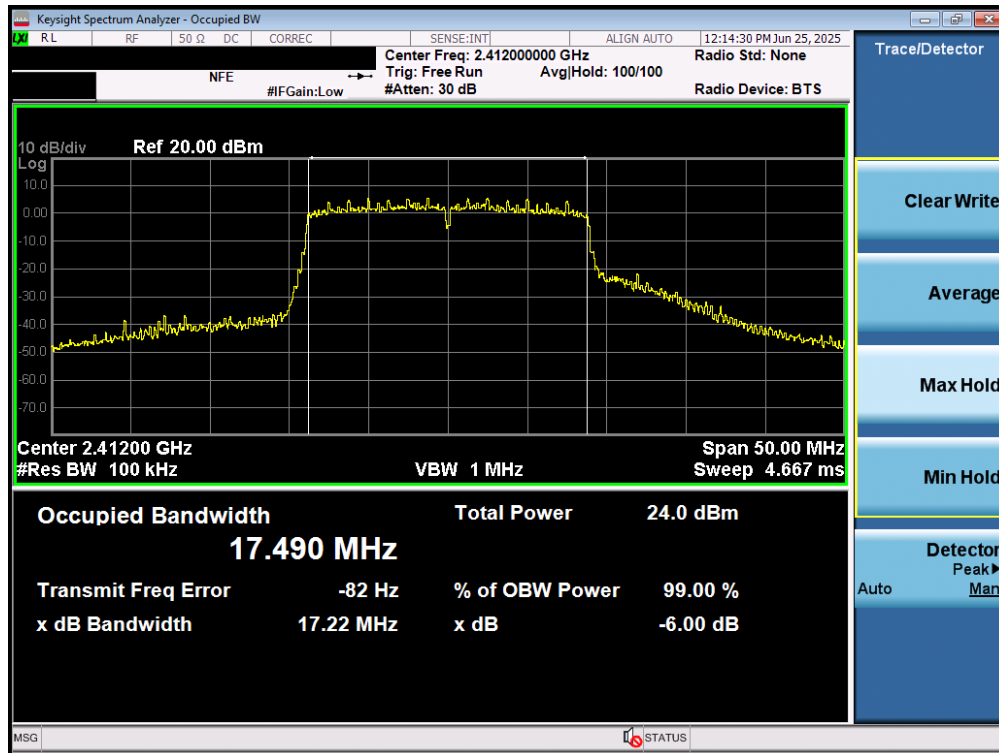

Plot 7-19. 6dB Bandwidth Plot MIMO ANT2 (802.11n/ac (2.4GHz) – Ch. 1)

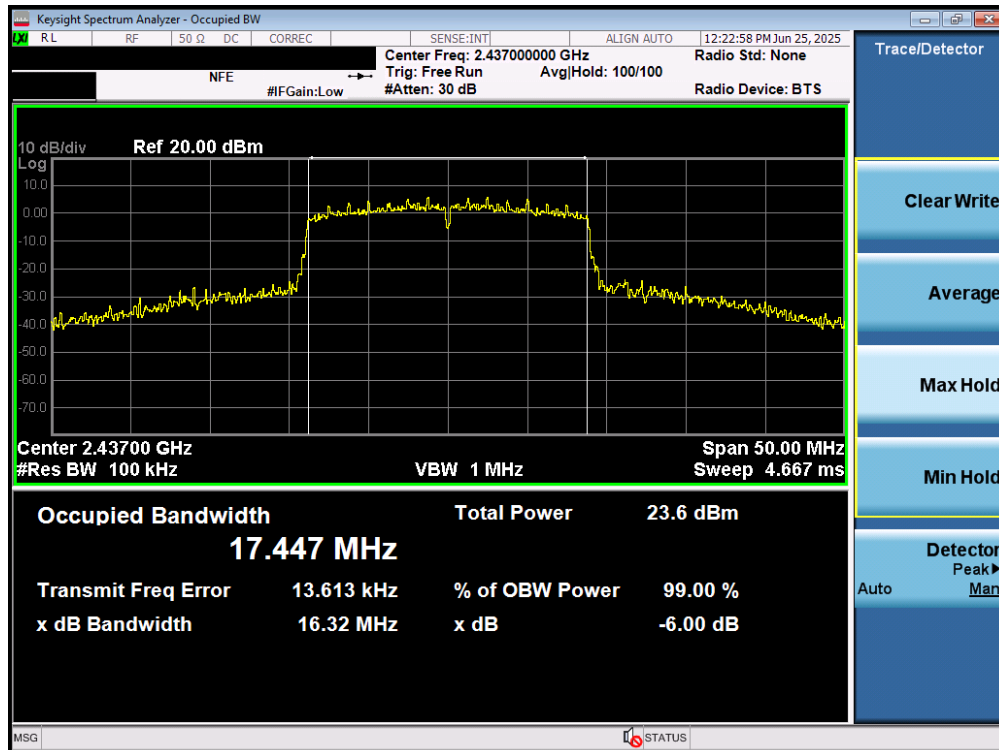


Plot 7-20. 6dB Bandwidth Plot MIMO ANT2 (802.11n/ac (2.4GHz) – Ch. 6)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 26 of 85




Plot 7-21. 6dB Bandwidth Plot MIMO ANT2 (802.11n/ac (2.4GHz) – Ch. 11)

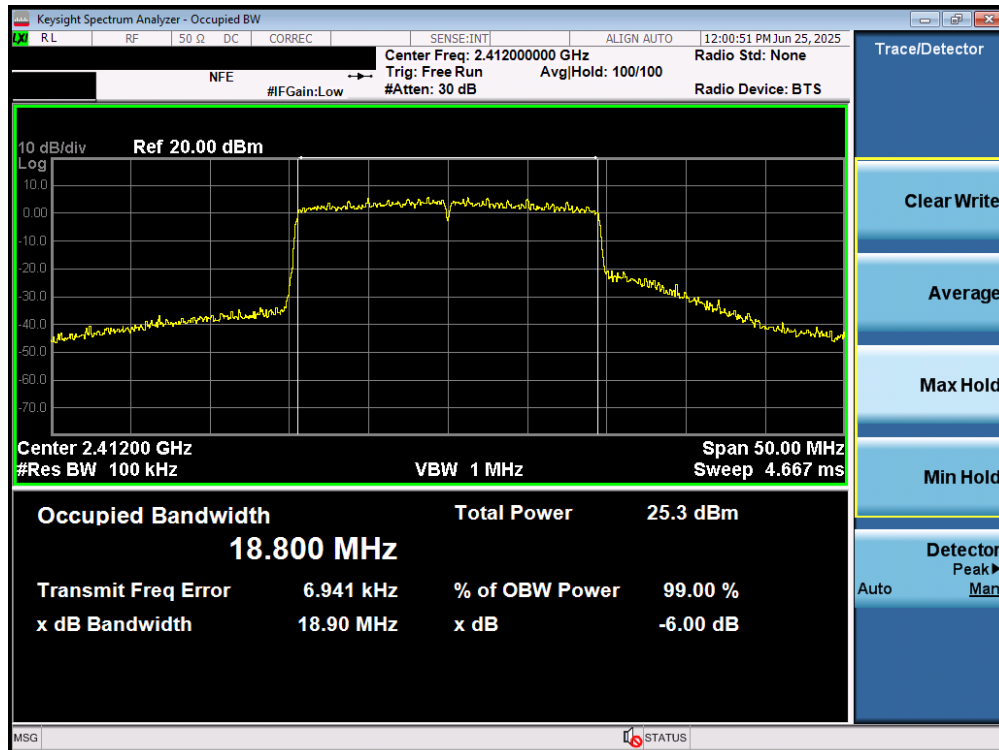


Plot 7-22. 6dB Bandwidth Plot MIMO ANT2 (802.11ax/be (2.4GHz) – Ch. 1)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 27 of 85

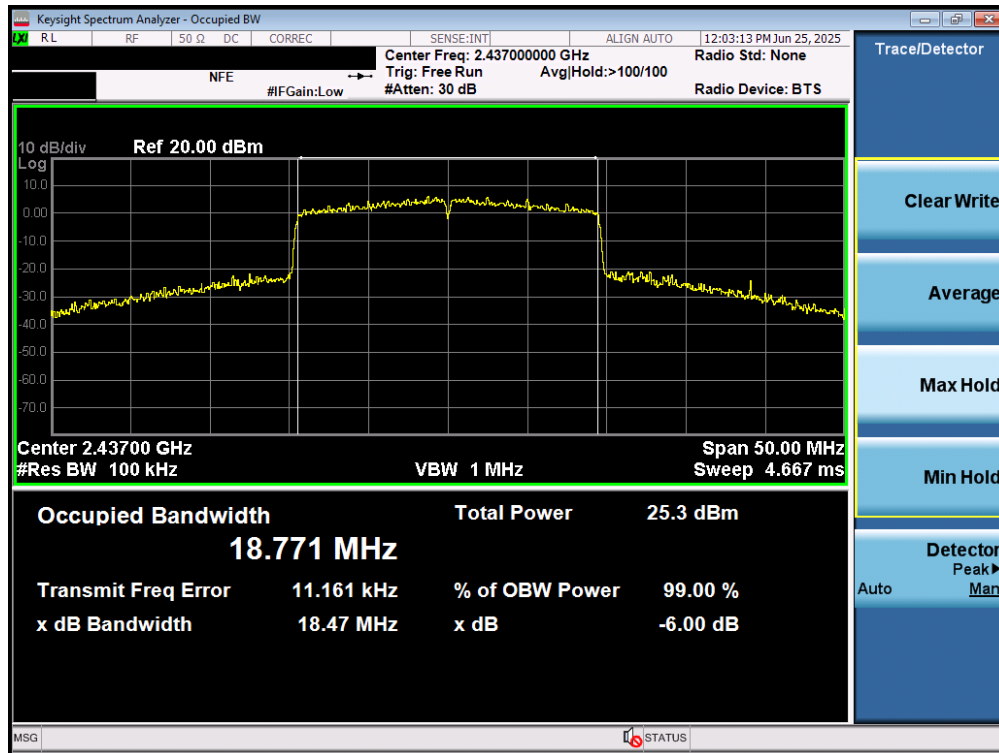

Plot 7-23. 6dB Bandwidth Plot MIMO ANT2 (802.11ax/be (2.4GHz) – Ch. 6)

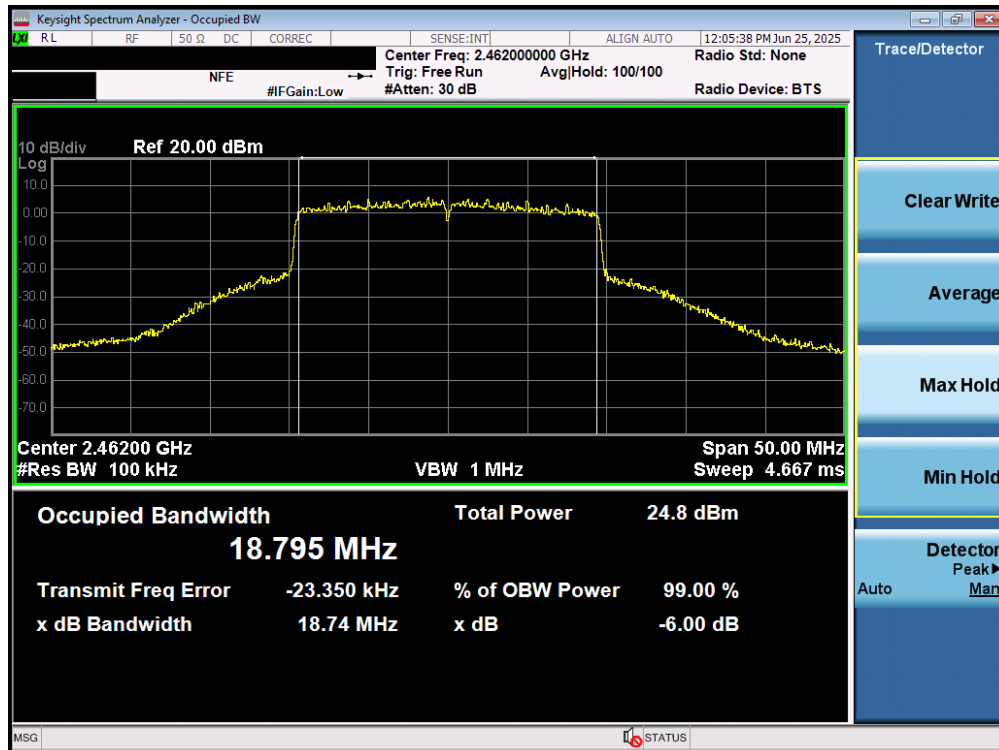

Plot 7-24. 6dB Bandwidth Plot MIMO ANT2 (802.11ax/be (2.4GHz) – Ch. 11)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 28 of 85

7.3 Output Power Measurement

Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt per 15.247.

Test Procedure Used

ANSI C63.10:2020 – Section 11.9.1.2 PKPM1 Peak Power Method
 ANSI C63.10:2020 – Section 11.9.2.3.2 Method AVGPM-G
 ANSI C63.10:2020 – Section 14.5.2.3 Measure-and-Sum Technique

Test Settings

Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.



Figure 7-2. Test Instrument & Measurement Setup for Power Meter Measurements

Test Notes

None.

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 29 of 85

2.4GHz WIFI (20MHz 802.11b MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Freq [MHz]	Channel	Detector	Conducted Power [dBm]								
			ANT1	ANT2	MIMO						
2412	1	Average	18.77	18.66	21.73	30.00	-8.27	-3.71	18.02	36.02	-18.00
2437	6		18.28	18.54	21.42	30.00	-8.58	-3.71	17.71	36.02	-18.31
2462	11		18.69	18.55	21.63	30.00	-8.37	-3.71	17.92	36.02	-18.10
2467	12		8.15	8.13	11.15	30.00	-18.85	-3.71	7.44	36.02	-28.58
2472	13		1.90	2.20	5.06	30.00	-24.94	-3.71	1.35	36.02	-34.67
2412	1	Peak	21.55	21.63	24.60	30.00	-5.40	-3.71	20.89	36.02	-15.13
2437	6		21.40	20.80	24.12	30.00	-5.88	-3.71	20.41	36.02	-15.61
2462	11		18.72	17.08	20.99	30.00	-9.01	-3.71	17.28	36.02	-18.74
2467	12		17.38	17.69	20.55	30.00	-9.45	-3.71	16.84	36.02	-19.18
2472	13		4.78	4.97	7.89	30.00	-22.11	-3.71	4.18	36.02	-31.84

Table 7-3. Conducted Output Power Measurements MIMO (802.11b)

2.4GHz WIFI (20MHz 802.11g MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Freq [MHz]	Channel	Detector	Conducted Power [dBm]								
			ANT1	ANT2	MIMO						
2412	1	Average	16.21	16.45	19.34	30.00	-10.66	-3.71	15.63	36.02	-20.39
2437	6		16.75	16.05	19.42	30.00	-10.58	-3.71	15.71	36.02	-20.31
2462	11		16.68	16.25	19.48	30.00	-10.52	-3.71	15.77	36.02	-20.25
2467	12		8.03	7.99	11.02	30.00	-18.98	-3.71	7.31	36.02	-28.71
2472	13		1.89	2.24	5.08	30.00	-24.92	-3.71	1.37	36.02	-34.65
2412	1	Peak	23.49	24.43	27.00	30.00	-3.00	-3.71	23.29	36.02	-12.73
2437	6		24.51	23.21	26.92	30.00	-3.08	-3.71	23.21	36.02	-12.81
2462	11		23.60	23.52	26.57	30.00	-3.43	-3.71	22.86	36.02	-13.16
2467	12		15.84	15.48	18.67	30.00	-11.33	-3.71	14.97	36.02	-21.05
2472	13		12.72	13.21	15.98	30.00	-14.02	-3.71	12.28	36.02	-23.74

Table 7-4. Conducted Output Power Measurements MIMO (802.11g)

2.4GHz WIFI (20MHz 802.11n MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Freq [MHz]	Channel	Detector	Conducted Power [dBm]								
			ANT1	ANT2	MIMO						
2412	1	Average	16.28	16.45	19.38	30.00	-10.62	-3.71	15.67	36.02	-20.35
2437	6		16.57	16.18	19.39	30.00	-10.61	-3.71	15.68	36.02	-20.34
2462	11		16.75	16.29	19.54	30.00	-10.46	-3.71	15.83	36.02	-20.19
2467	12		8.13	8.22	11.19	30.00	-18.81	-3.71	7.48	36.02	-28.54
2472	13		1.90	2.29	5.11	30.00	-24.89	-3.71	1.40	36.02	-34.62
2412	1	Peak	23.57	24.66	27.16	30.00	-2.84	-3.71	23.45	36.02	-12.57
2437	6		24.81	23.26	27.11	30.00	-2.89	-3.71	23.41	36.02	-12.61
2462	11		23.84	23.38	26.63	30.00	-3.37	-3.71	22.92	36.02	-13.10
2467	12		15.90	15.75	18.84	30.00	-11.16	-3.71	15.13	36.02	-20.89
2472	13		10.55	10.43	13.50	30.00	-16.50	-3.71	9.80	36.02	-26.22

Table 7-5. Conducted Output Power Measurements MIMO (802.11n)

2.4GHz WIFI (20MHz 802.11ax MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Freq [MHz]	Channel	Detector	Conducted Power [dBm]								
			ANT1	ANT2	MIMO						
2412	1	Average	16.28	16.65	19.48	30.00	-10.52	-3.71	15.77	36.02	-20.25
2437	6		16.90	16.38	19.66	30.00	-10.34	-3.71	15.95	36.02	-20.07
2462	11		16.43	16.00	19.23	30.00	-10.77	-3.71	15.52	36.02	-20.50
2467	12		8.35	8.20	11.29	30.00	-18.71	-3.71	7.58	36.02	-28.44
2472	13		2.12	2.39	5.27	30.00	-24.73	-3.71	1.56	36.02	-34.46
2412	1	Peak	24.38	25.00	27.71	30.00	-2.29	-3.71	24.00	36.02	-12.02
2437	6		24.58	23.40	27.04	30.00	-2.96	-3.71	23.33	36.02	-12.69
2462	11		24.72	24.60	27.67	30.00	-2.33	-3.71	23.96	36.02	-12.06
2467	12		19.90	19.88	22.90	30.00	-7.10	-3.71	19.19	36.02	-16.83
2472	13		13.75	13.50	16.64	30.00	-13.36	-3.71	12.93	36.02	-23.09

Table 7-6. Conducted Output Power Measurements MIMO (802.11ax)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 30 of 85

2.4GHz WIFI (20MHz 802.11be MIMO)						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Freq [MHz]	Channel	Detector	Conducted Power [dBm]								
			ANT1	ANT2	MIMO						
2412	1	Average	16.53	16.72	19.64	30.00	-10.36	-3.71	15.93	36.02	-20.09
2437	6		16.75	16.35	19.56	30.00	-10.44	-3.71	15.85	36.02	-20.17
2462	11		16.19	16.00	19.11	30.00	-10.89	-3.71	15.40	36.02	-20.62
2467	12		8.34	8.21	11.29	30.00	-18.71	-3.71	7.58	36.02	-28.44
2472	13		2.11	2.40	5.27	30.00	-24.73	-3.71	1.56	36.02	-34.46
2412	1	Peak	23.78	24.74	27.30	30.00	-2.70	-3.71	23.59	36.02	-12.43
2437	6		24.72	23.40	27.12	30.00	-2.88	-3.71	23.41	36.02	-12.61
2462	11		23.57	23.31	26.45	30.00	-3.55	-3.71	22.75	36.02	-13.27
2467	12		16.11	15.92	19.03	30.00	-10.97	-3.71	15.32	36.02	-20.70
2472	13		11.06	11.38	14.23	30.00	-15.77	-3.71	10.53	36.02	-25.49

Table 7-7. Conducted Output Power Measurements MIMO (802.11be)

Note:

Per ANSI C63.10:2020 Section 14.5.2.3, the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

At 2412MHz (802.11b) the average conducted output power was measured to be 18.77dBm for Antenna 1 and 18.66 dBm for Antenna 2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(18.77\text{dBm} + 18.66\text{dBm}) = (75.336\text{mW} + 73.451\text{mW}) = 148.787\text{mW} = 21.73\text{dBm}$$

FCC ID: A3LSMX930 IC: 649E-SMX930		MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet		Page 31 of 85

7.4 Power Spectral Density

Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates are investigated and the worst-case configuration results are reported in this section.

The maximum permissible power spectral density shall not be greater than 8 dBm in any 3 kHz band.

Test Procedure Used

ANSI C63.10:2020 – Section 11.10.2 Method PKPSD

ANSI C63.10:2020 – Section 14.5.2.3 Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 10kHz
4. VBW = 1MHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 32 of 85


Power Spectral Density Measurements

Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	ANT 1 Power Spectral Density [dBm]	ANT 2 Power Spectral Density [dBm]	Summed MIMO Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	b	1	-0.12	0.31	3.11	8.00	-4.89	Pass
2437	6	b	1	0.61	-0.32	3.18	8.00	-4.82	Pass
2462	11	b	1	1.55	-0.25	3.75	8.00	-4.25	Pass
2412	1	g	6	-4.82	-3.98	-1.37	8.00	-9.37	Pass
2437	6	g	6	-4.34	-4.16	-1.24	8.00	-9.24	Pass
2462	11	g	6	-4.85	-4.50	-1.66	8.00	-9.66	Pass
2412	1	n/ac	6.5/7.2 (MCS0)	-3.91	-2.24	0.01	8.00	-7.99	Pass
2437	6	n/ac	6.5/7.2 (MCS0)	-4.13	-1.97	0.09	8.00	-7.91	Pass
2462	11	n/ac	6.5/7.2 (MCS0)	-3.92	-3.41	-0.65	8.00	-8.65	Pass
2412	1	ax/be	6.5/7.2 (MCS0)	-4.48	-3.76	-1.09	8.00	-9.09	Pass
2437	6	ax/be	6.5/7.2 (MCS0)	-4.33	-3.76	-1.02	8.00	-9.02	Pass
2462	11	ax/be	6.5/7.2 (MCS0)	-4.27	-3.97	-1.11	8.00	-9.11	Pass


Table 7-8. Conducted Power Spectral Density Measurements MIMO

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 33 of 85

MIMO Power Spectral Density Measurements

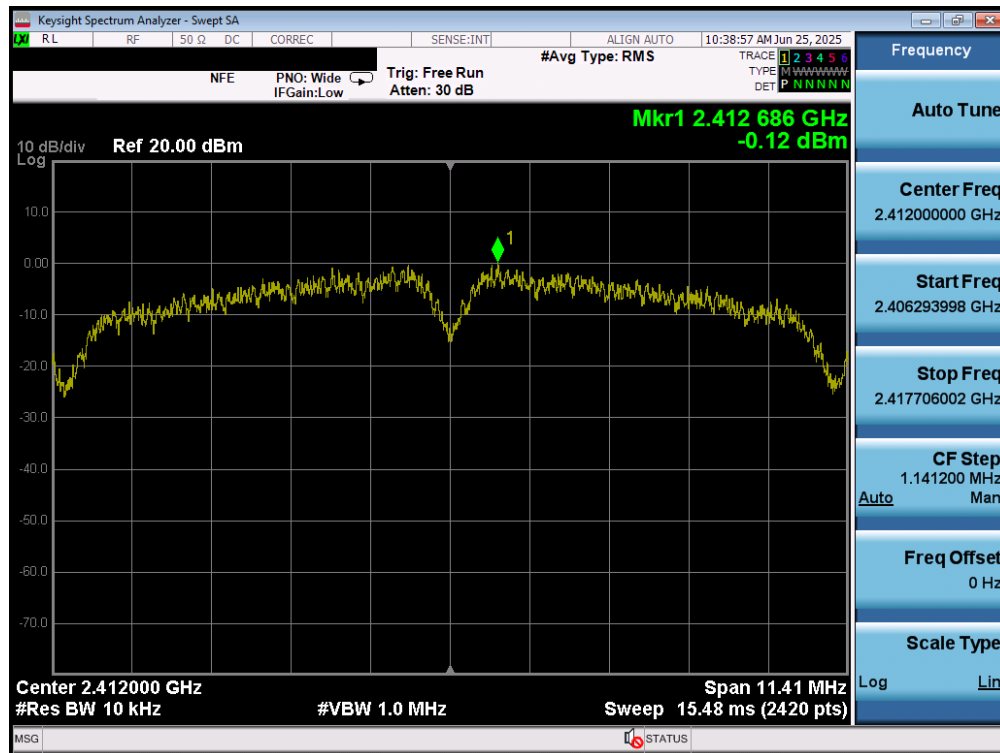


Plot 7-25. Power Spectral Density Plot MIMO ANT1 (802.11b – Ch. 1)

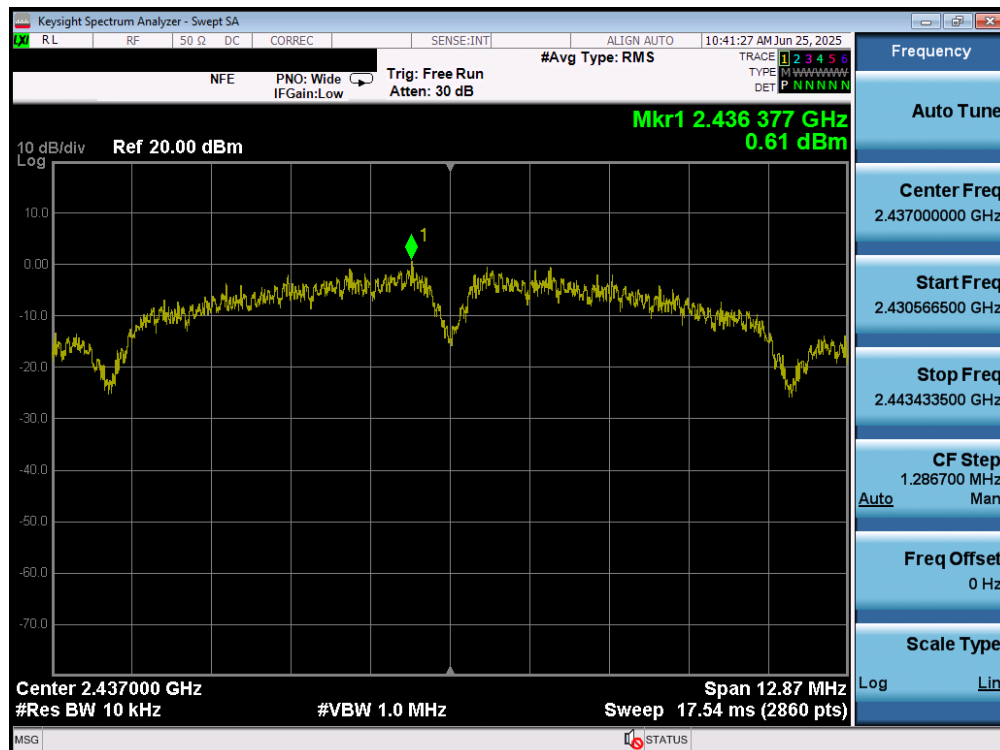


Plot 7-26. Power Spectral Density Plot MIMO ANT1 (802.11b – Ch. 6)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 34 of 85

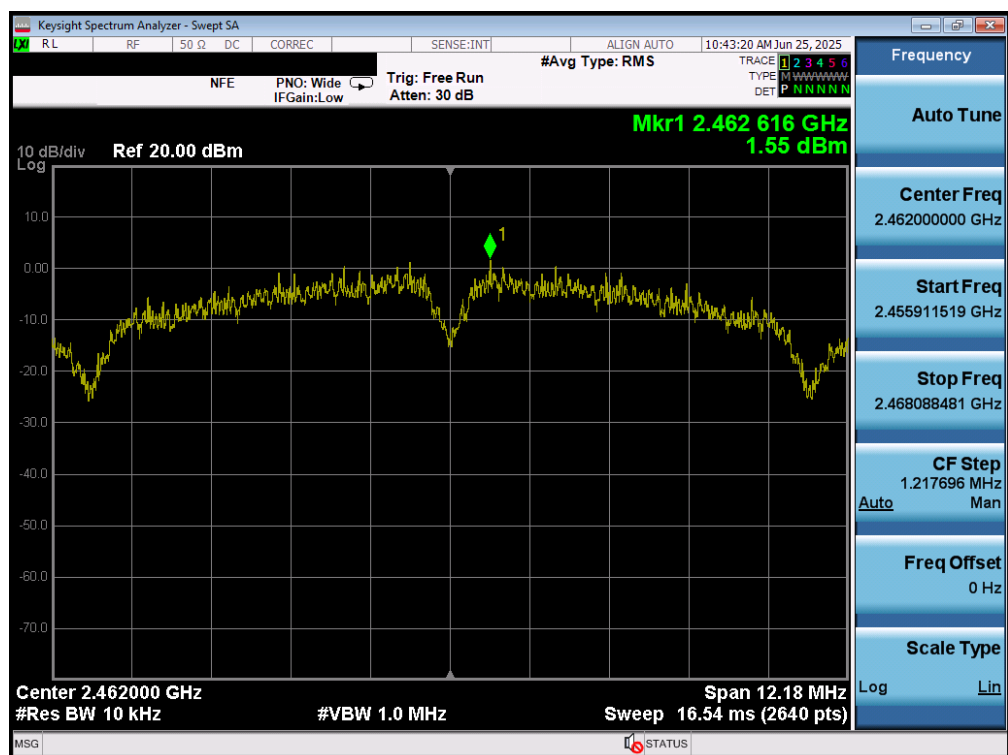


Plot 7-27. Power Spectral Density Plot MIMO ANT1 (802.11b – Ch. 11)

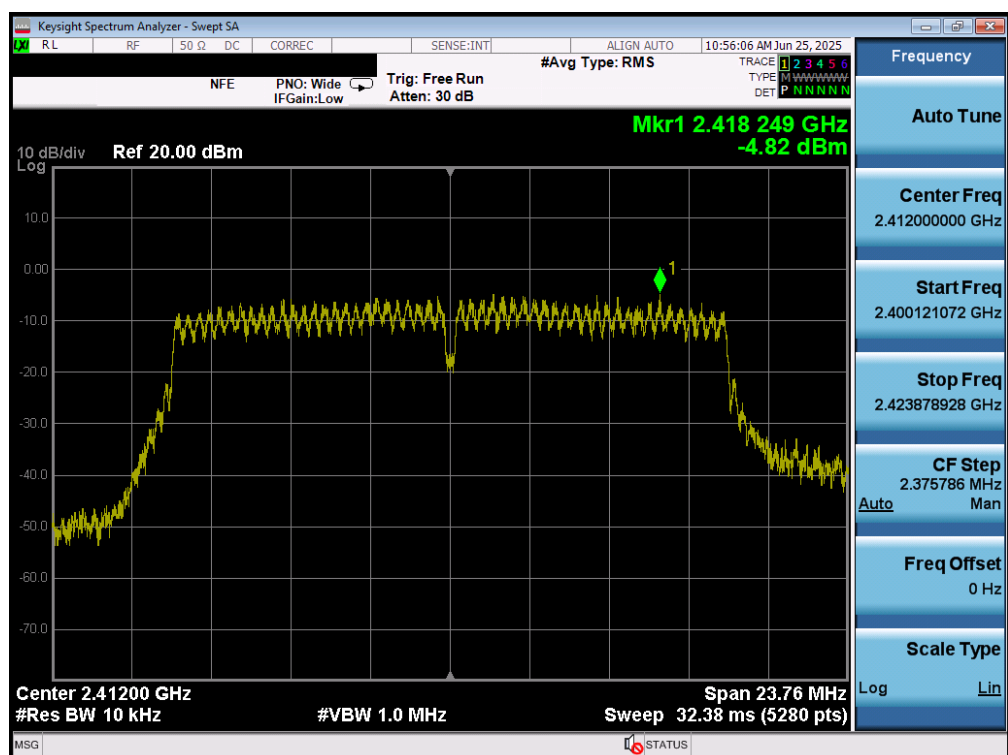


Plot 7-28. Power Spectral Density Plot MIMO ANT1 (802.11g – Ch. 1)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 35 of 85

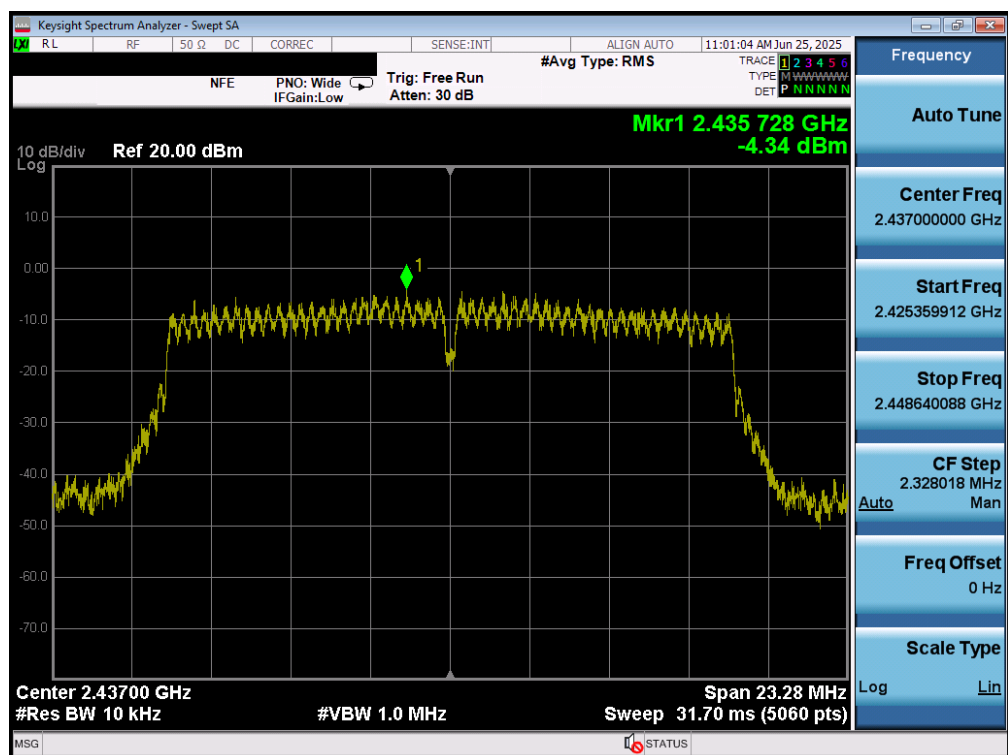


Plot 7-29. Power Spectral Density Plot MIMO ANT1 (802.11g – Ch. 6)

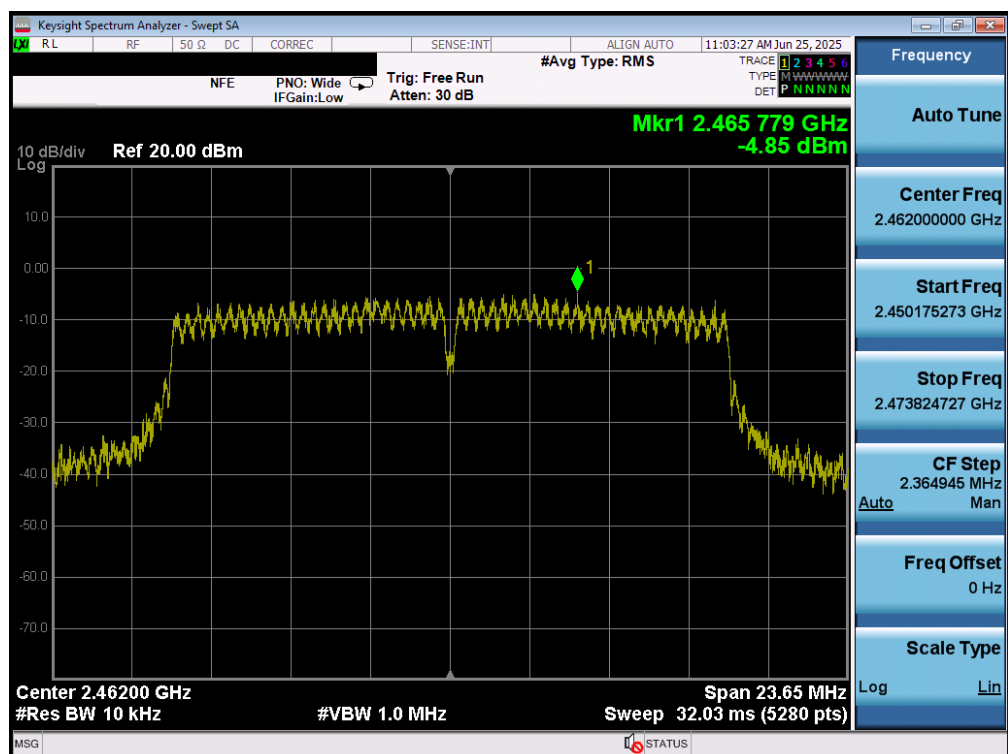


Plot 7-30. Power Spectral Density Plot MIMO ANT1 (802.11g – Ch. 11)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 36 of 85

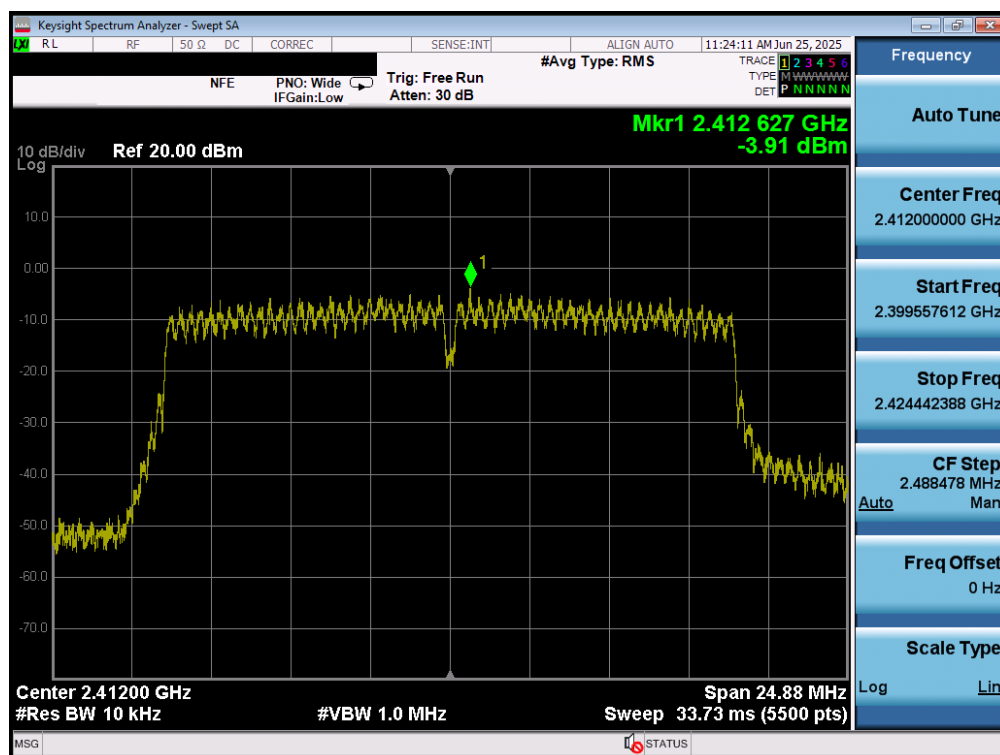


Plot 7-31. Power Spectral Density Plot MIMO ANT1 (802.11n/ac (2.4GHz) – Ch. 1)

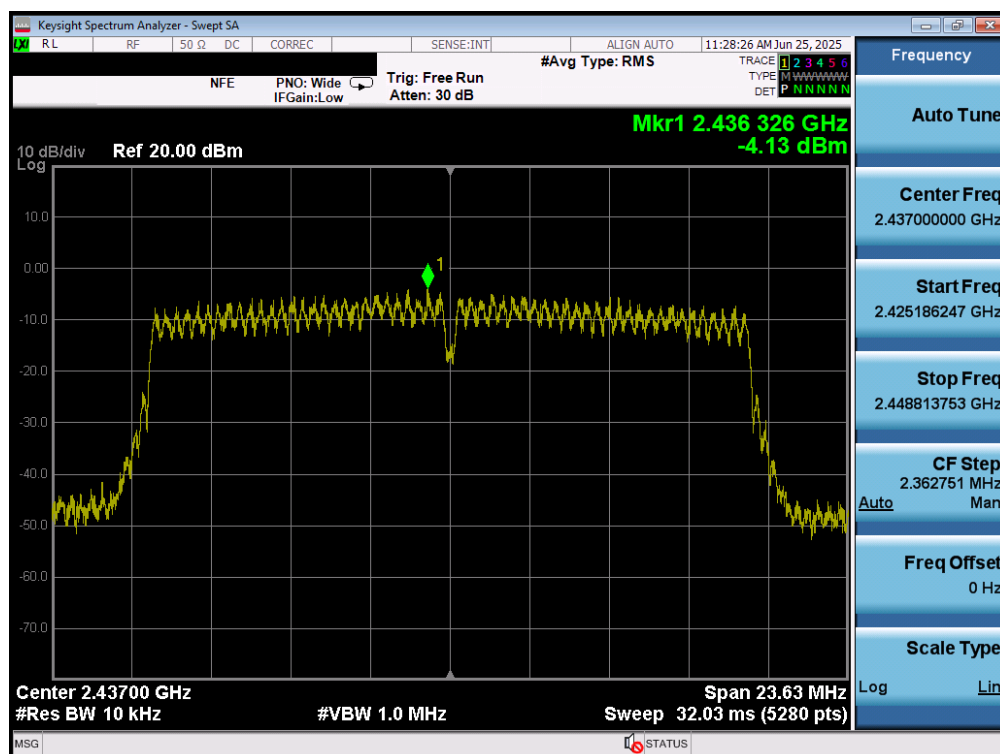


Plot 7-32. Power Spectral Density Plot MIMO ANT1 (802.11n/ac (2.4GHz) – Ch. 6)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 37 of 85

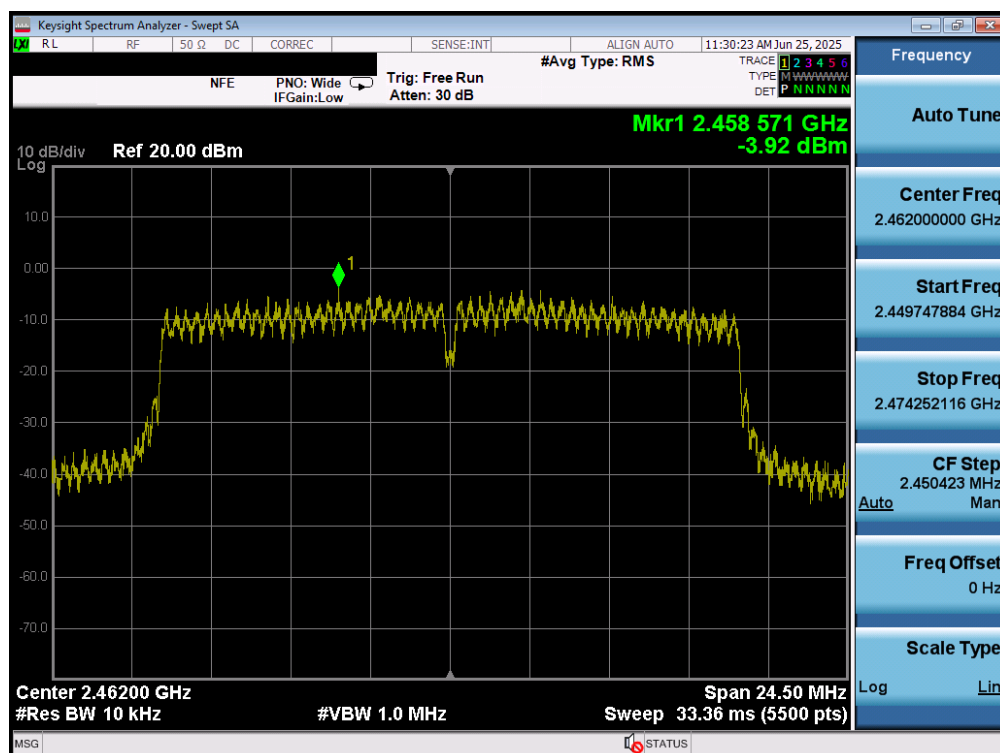



Plot 7-33. Power Spectral Density Plot MIMO ANT1 (802.11n/ac (2.4GHz) – Ch. 11)

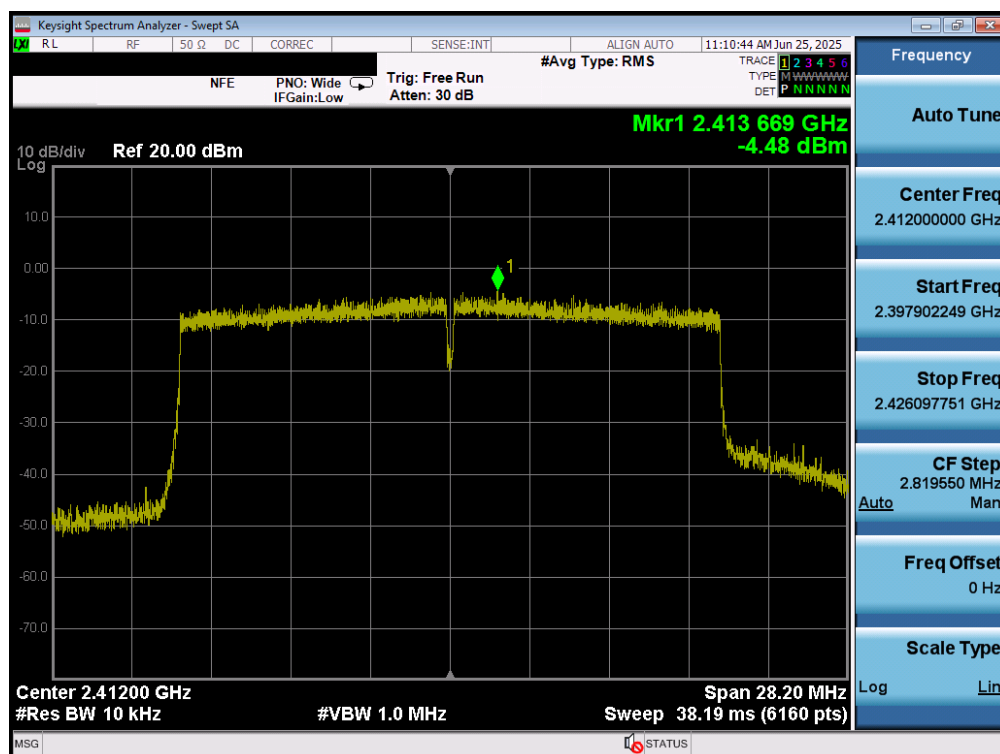


Plot 7-34. Power Spectral Density Plot MIMO ANT1 (802.11ax/be (2.4GHz) – Ch. 1)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 38 of 85

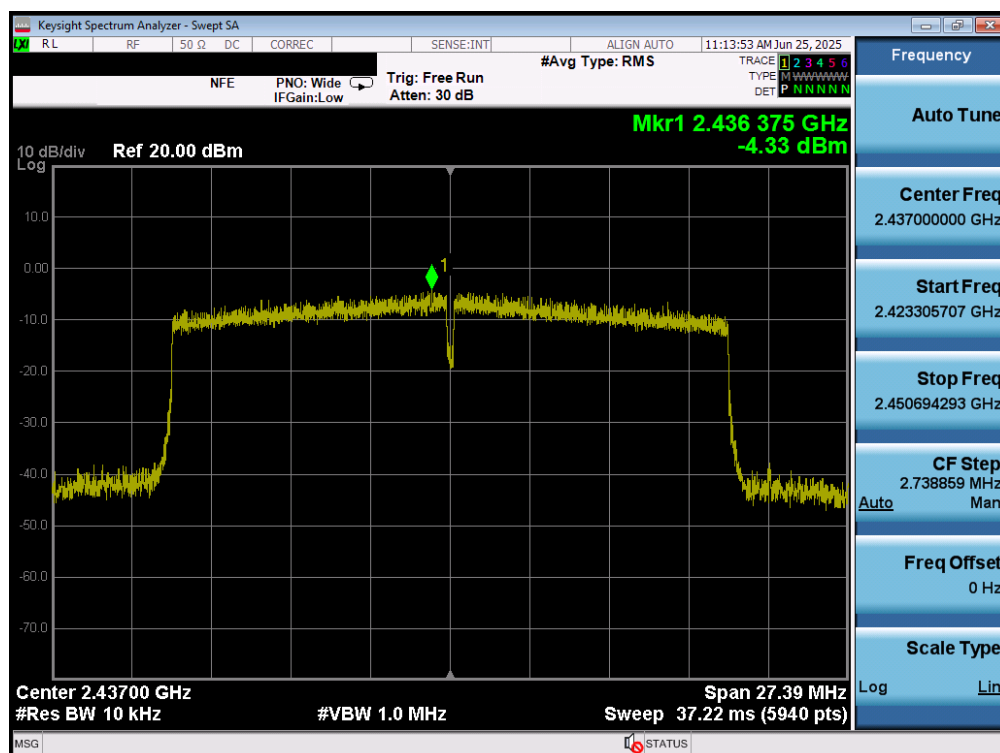

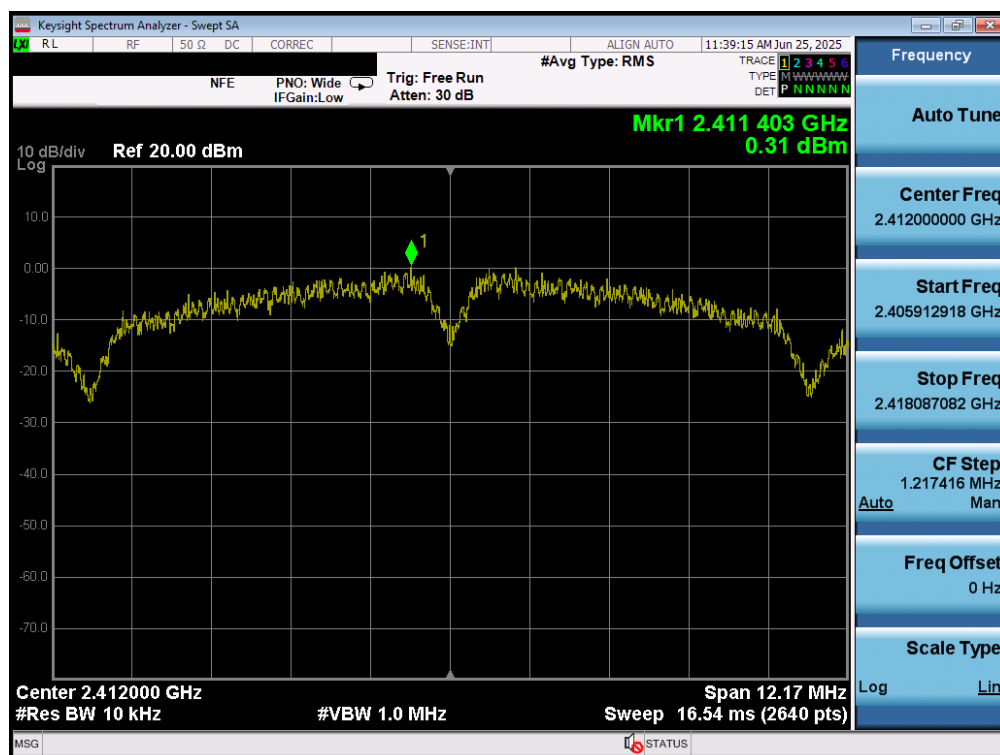


Plot 7-37. Power Spectral Density Plot MIMO ANT2 (802.11b – Ch. 1)

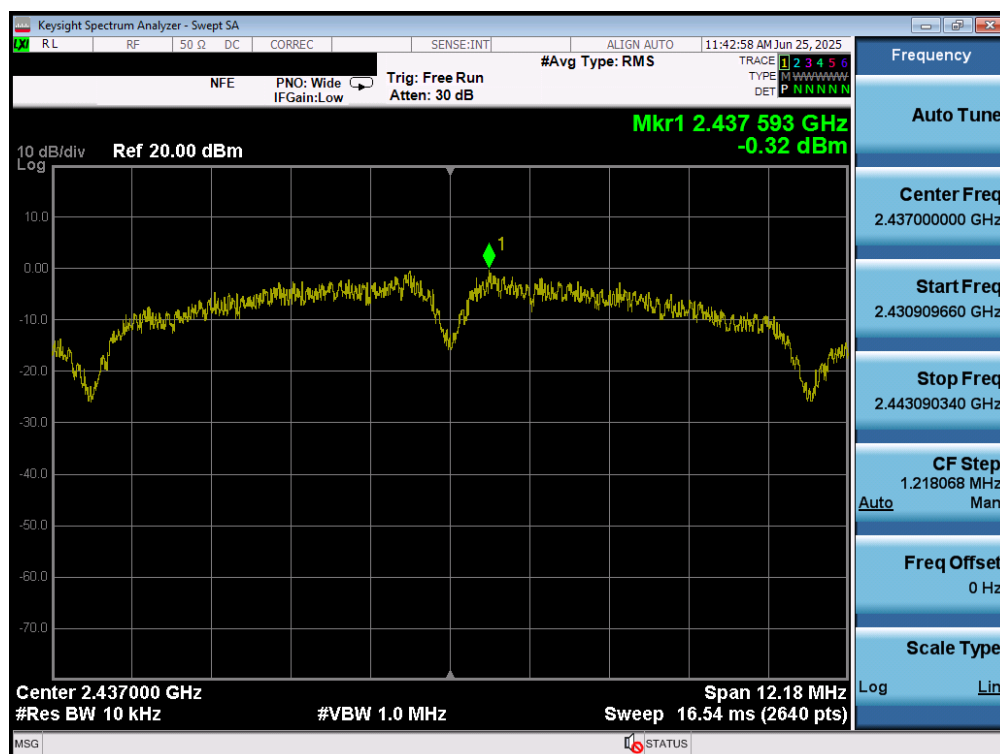


Plot 7-38. Power Spectral Density Plot MIMO ANT2 (802.11b – Ch. 6)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 40 of 85

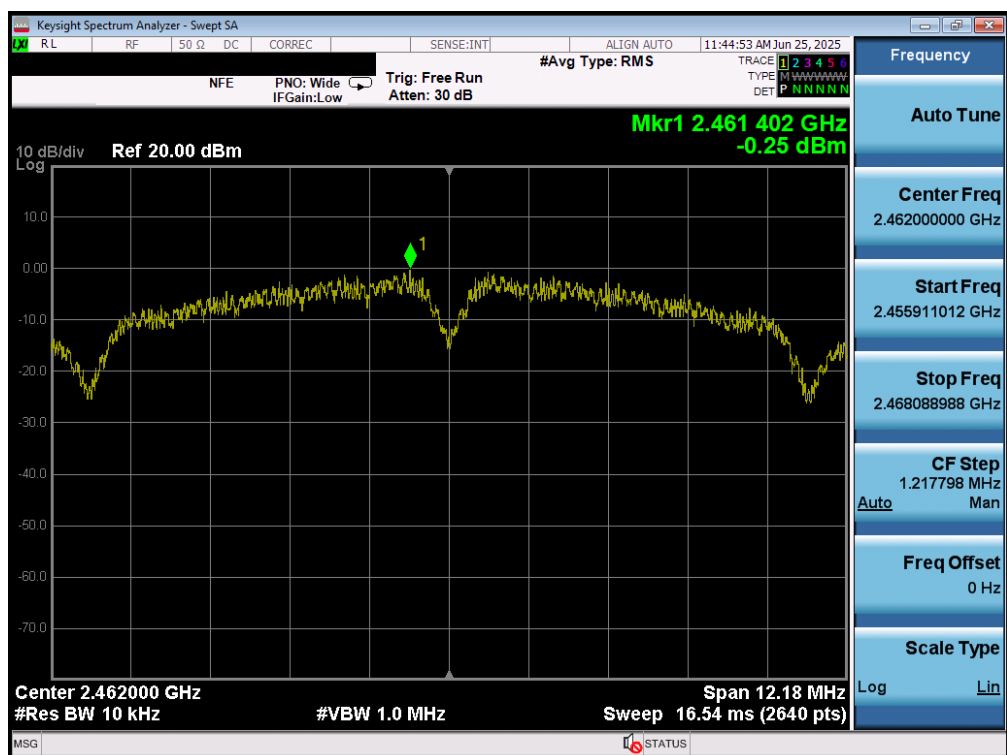


Plot 7-39. Power Spectral Density Plot MIMO ANT2 (802.11b – Ch. 11)

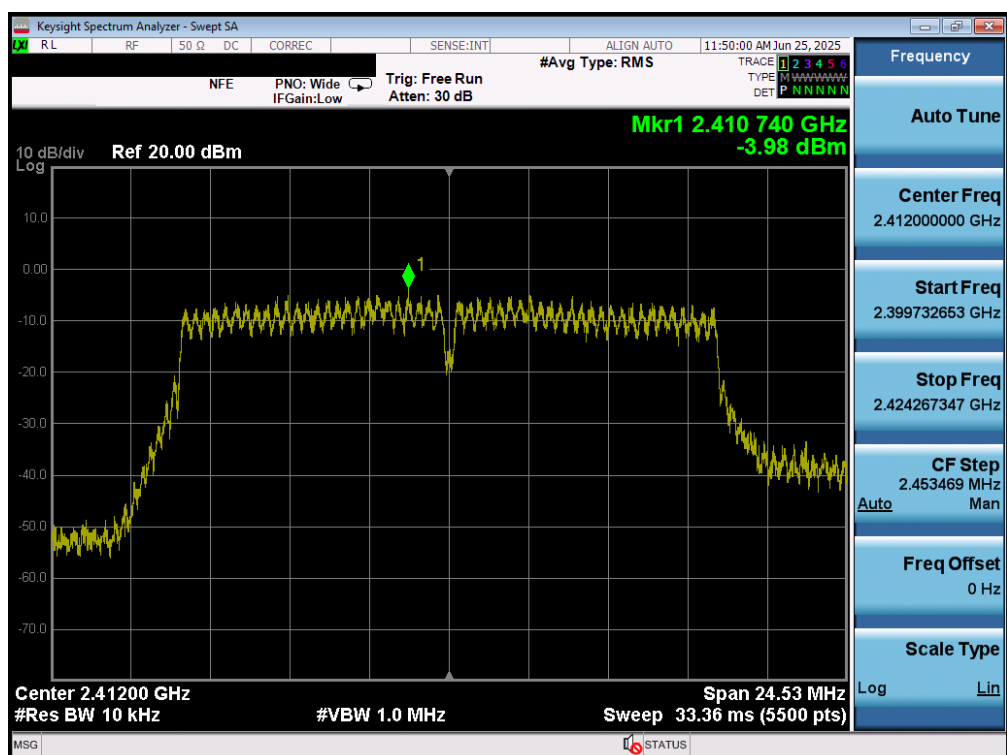


Plot 7-40. Power Spectral Density Plot MIMO ANT2 (802.11g – Ch. 1)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 41 of 85

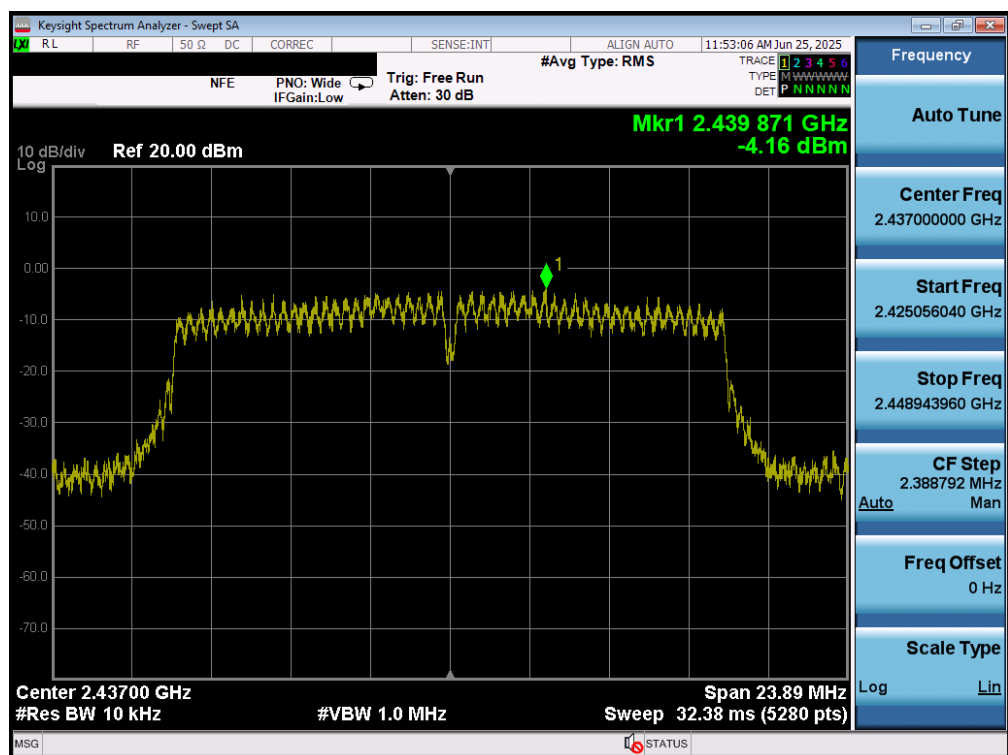



Plot 7-41. Power Spectral Density Plot MIMO ANT2 (802.11g – Ch. 6)

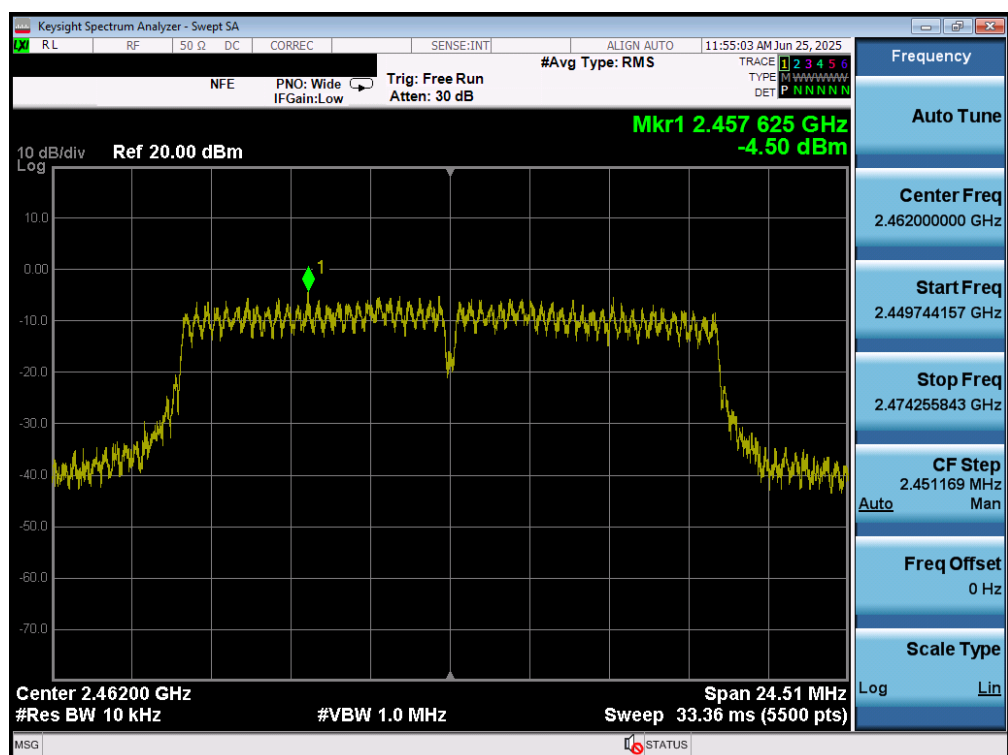


Plot 7-42. Power Spectral Density Plot MIMO ANT2 (802.11g – Ch. 11)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 42 of 85

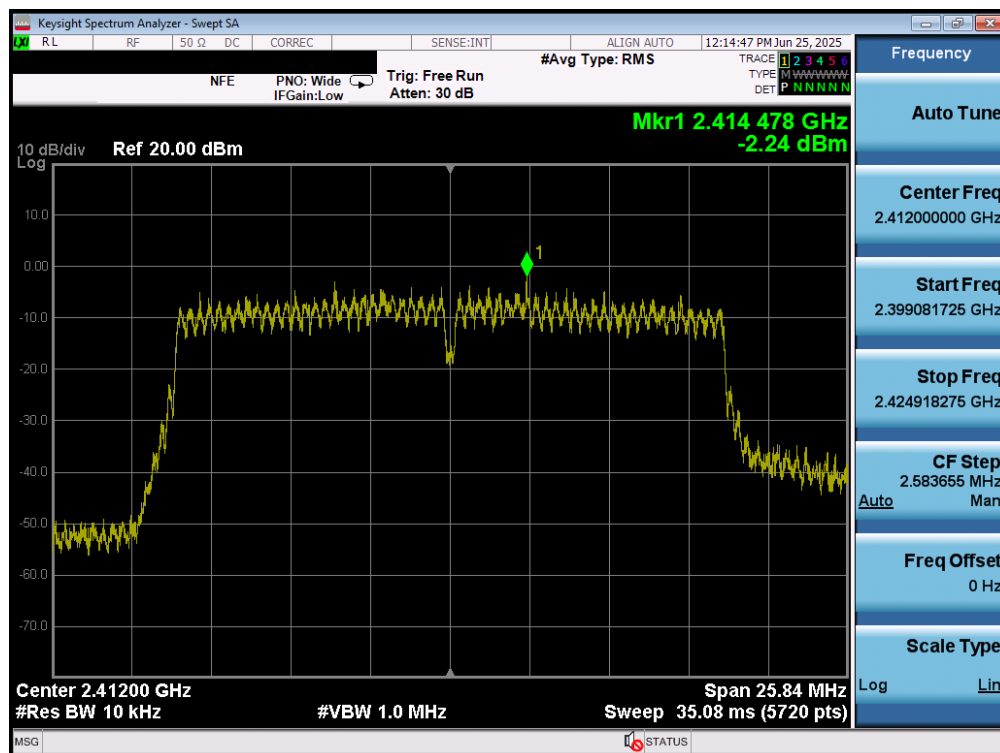

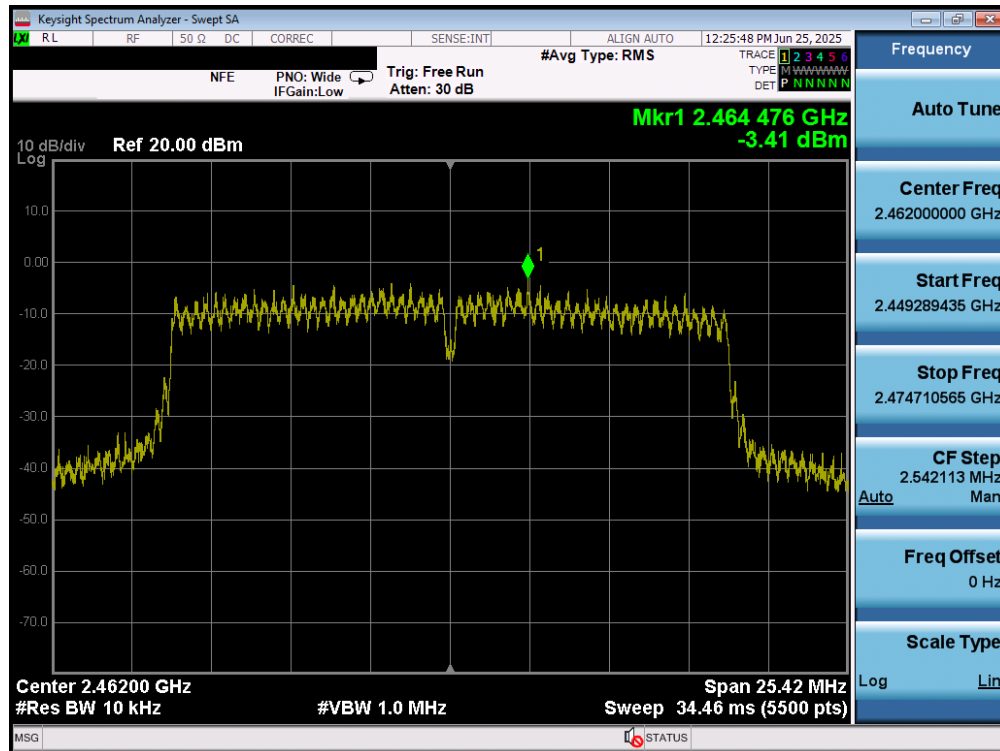


Plot 7-45. Power Spectral Density Plot MIMO ANT2 (802.11n/ac (2.4GHz) – Ch. 11)

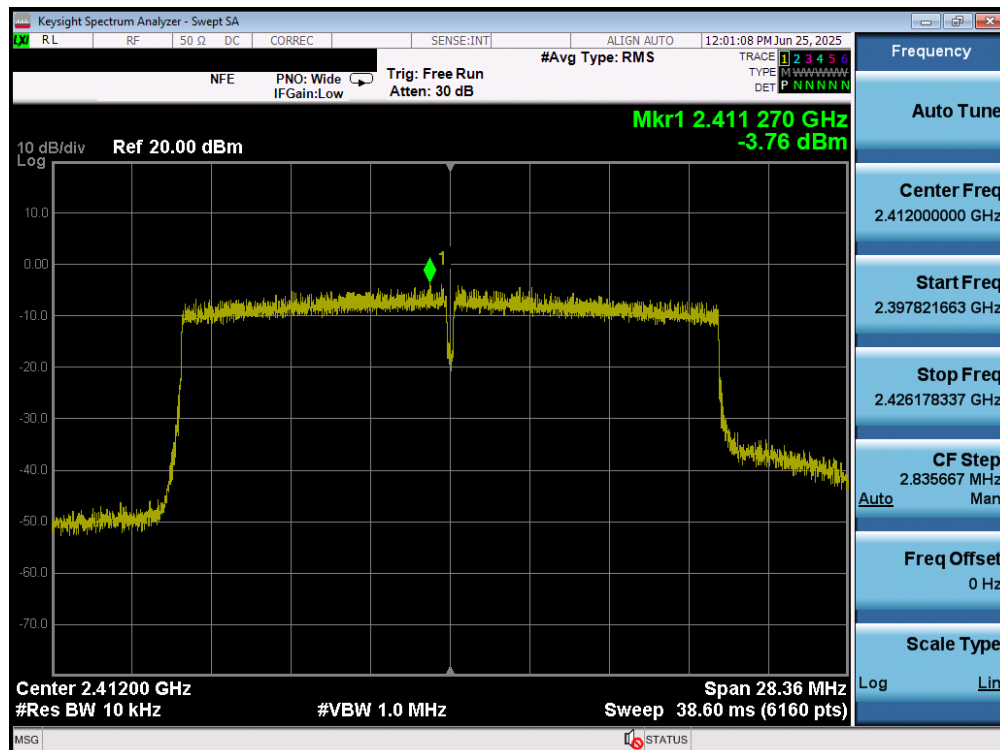


Plot 7-46. Power Spectral Density Plot MIMO ANT2 (802.11ax/be (2.4GHz) – Ch. 1)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 44 of 85

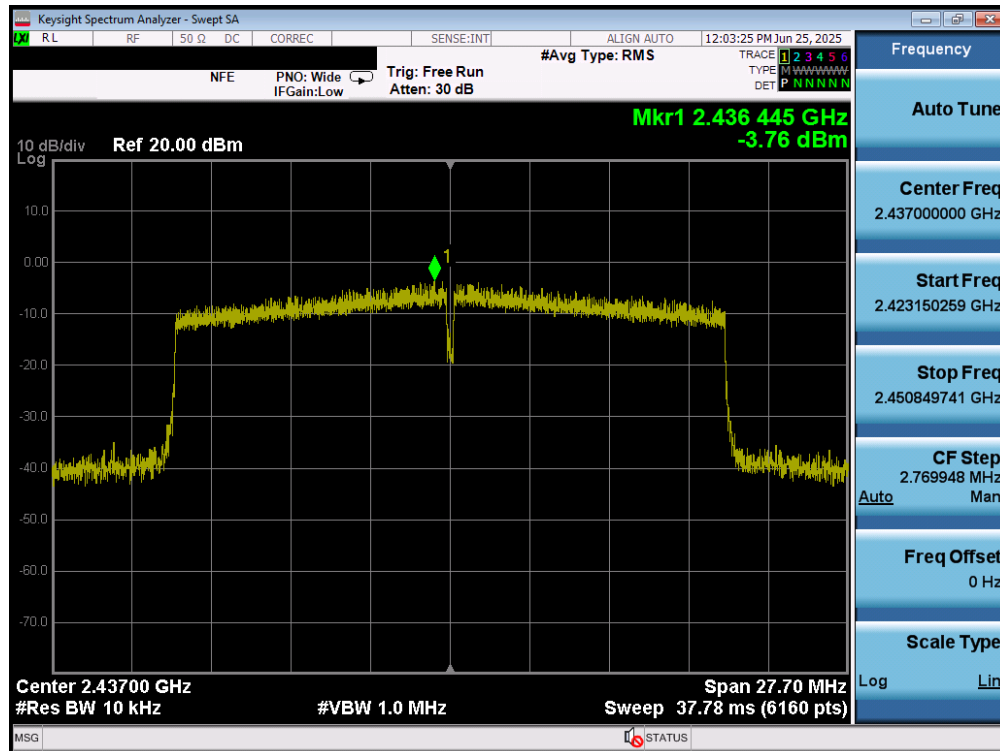

Plot 7-47. Power Spectral Density Plot MIMO ANT2 (802.11ax/be (2.4GHz) – Ch. 6)

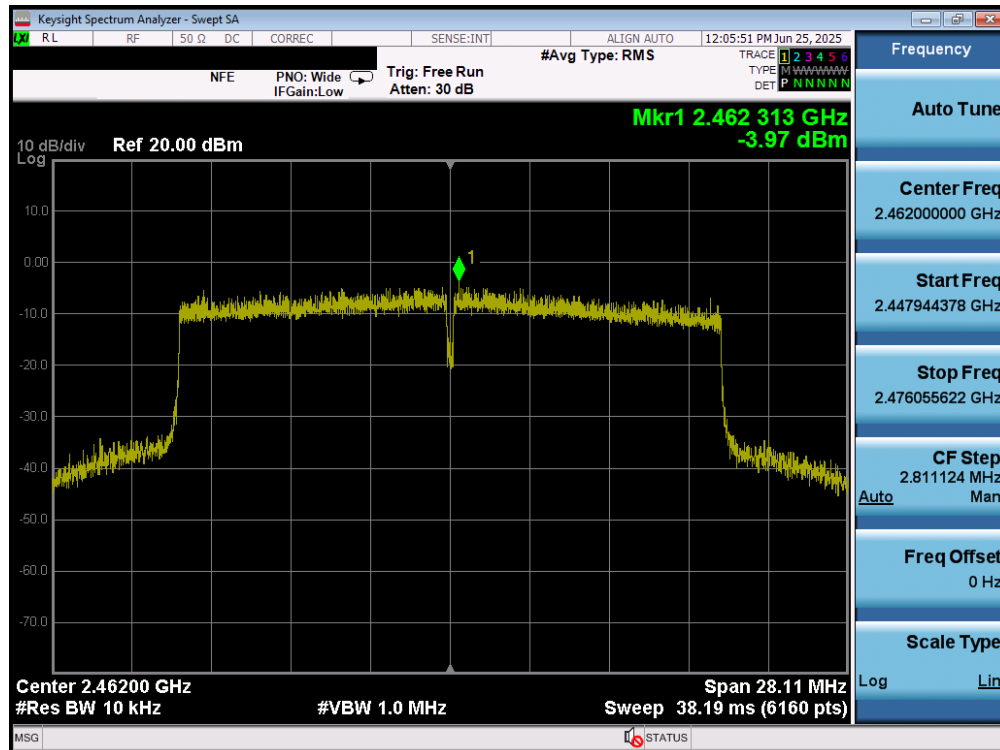

Plot 7-48. Power Spectral Density Plot MIMO ANT2 (802.11ax/be (2.4GHz) – Ch. 11)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 45 of 85



Note:

Per ANSI C63.10:2020 Section 14.5.2.3, the power spectral density at Antenna 1 and Antenna 2 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

At 2412MHz the average conducted power spectral density was measured to be -4.48 dBm for Antenna 1 and -3.76 dBm for Antenna 2.

Antenna 1 + Antenna 2 = MIMO

$$(-4.48 \text{ dBm} + -3.76 \text{ dBm}) = (0.36 \text{ mW} + 0.42 \text{ mW}) = 0.78 \text{ mW} = -1.09 \text{ dBm}$$

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 46 of 85

7.5 Conducted Band Edge Emissions

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. For the following out of band conducted spurious emissions plots at the band edge, the EUT was set at a data rate of 1Mbps for “b” mode, 6 Mbps for “g” mode, 6.5/7.2Mbps for “n” mode, 8.6Mbps for “ax” mode, and 7.3Mbps (EHT0) for “be” mode as these settings produced the worst-case emissions.

The limit for out-of-band spurious emissions at the band edge is N/AdB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 7.4).

Test Procedure Used

ANSI C63.10:2020 – Section 11.11.3

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 1MHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-4. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 47 of 85

MIMO Conducted Band Edge Emissions

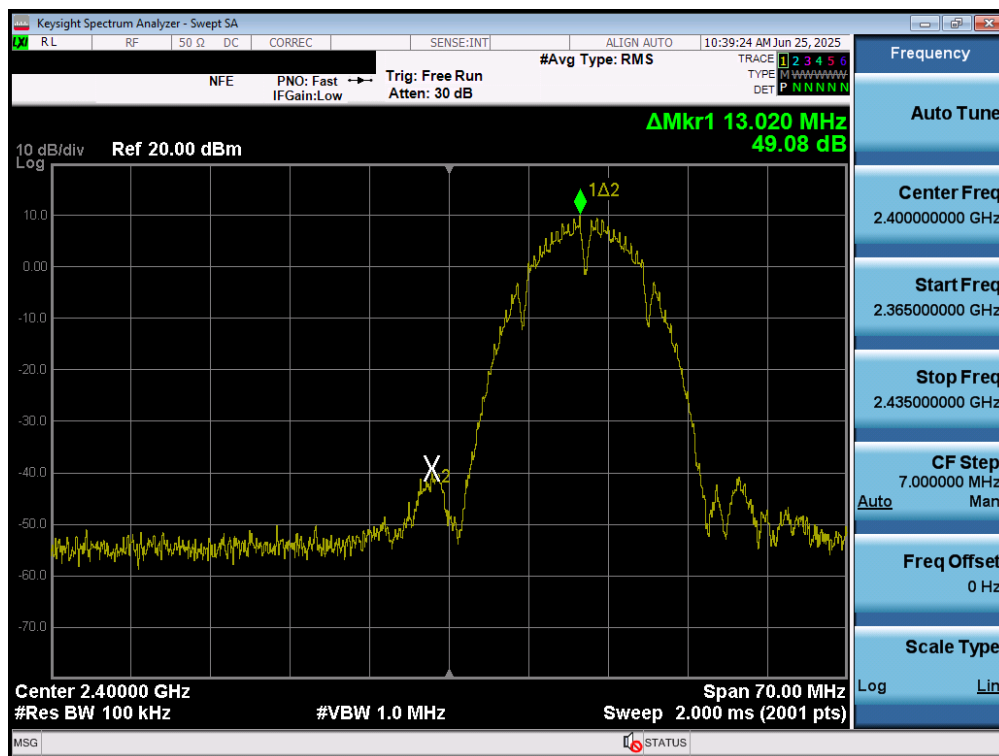


Plot 7-49. Band Edge Plot MIMO ANT1 (802.11b – Ch. 1)

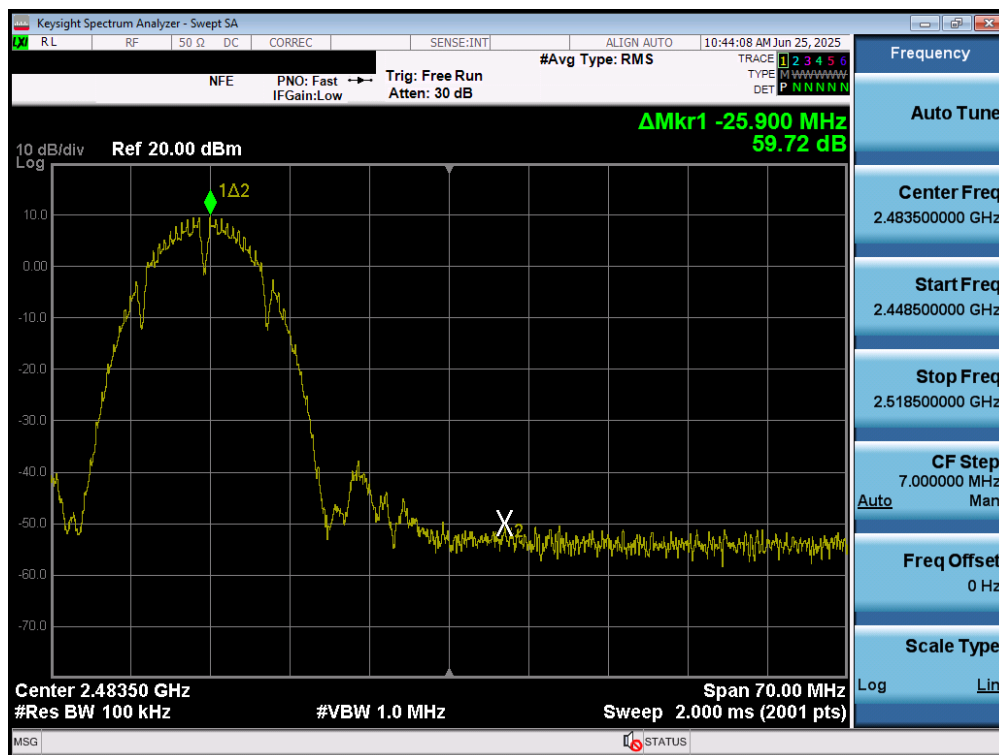


Plot 7-50. Band Edge Plot MIMO ANT1 (802.11b – Ch. 11)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 48 of 85

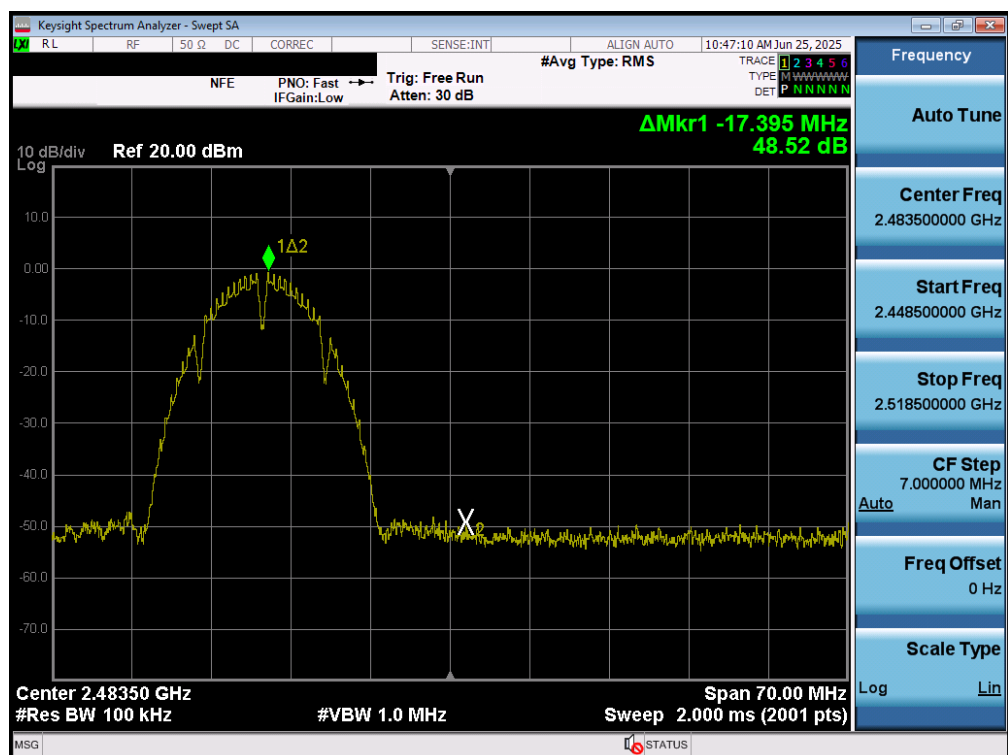


Plot 7-51. Band Edge Plot MIMO ANT1 (802.11b – Ch. 12)

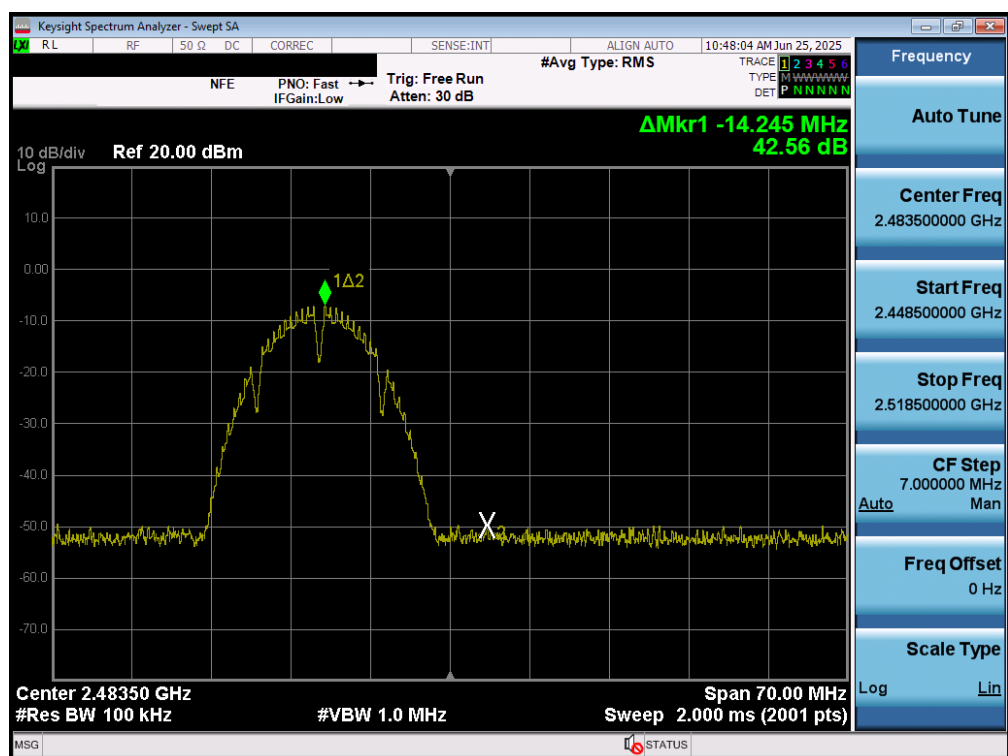


Plot 7-52. Band Edge Plot MIMO ANT1 (802.11b – Ch. 13)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 49 of 85

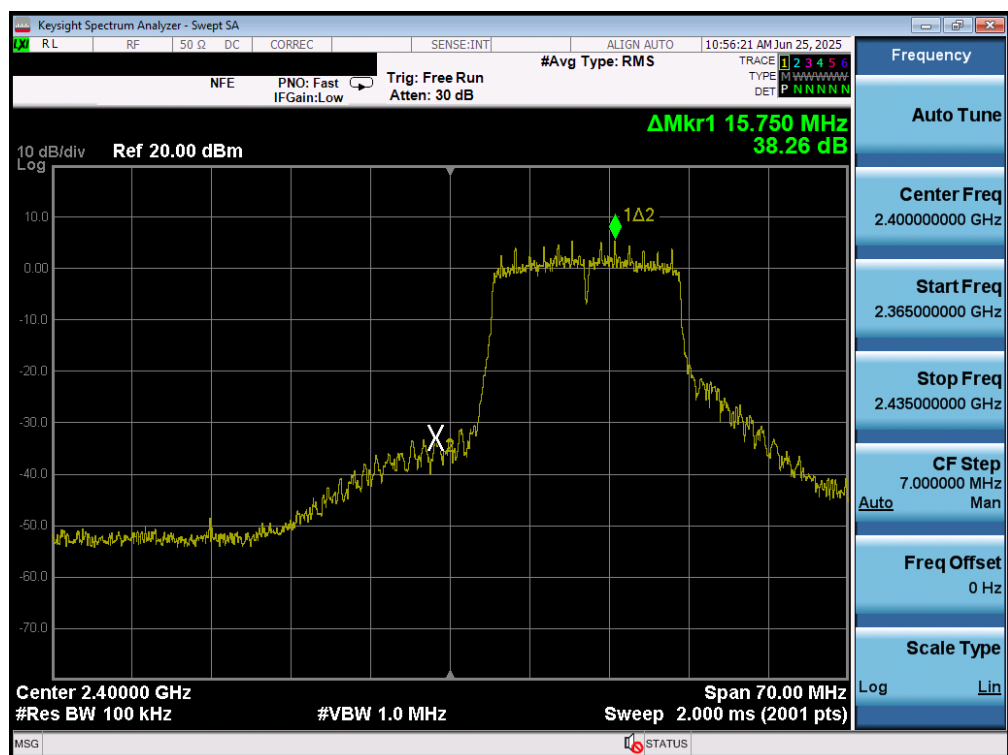


Plot 7-53. Band Edge Plot MIMO ANT1 (802.11g- Ch. 1)

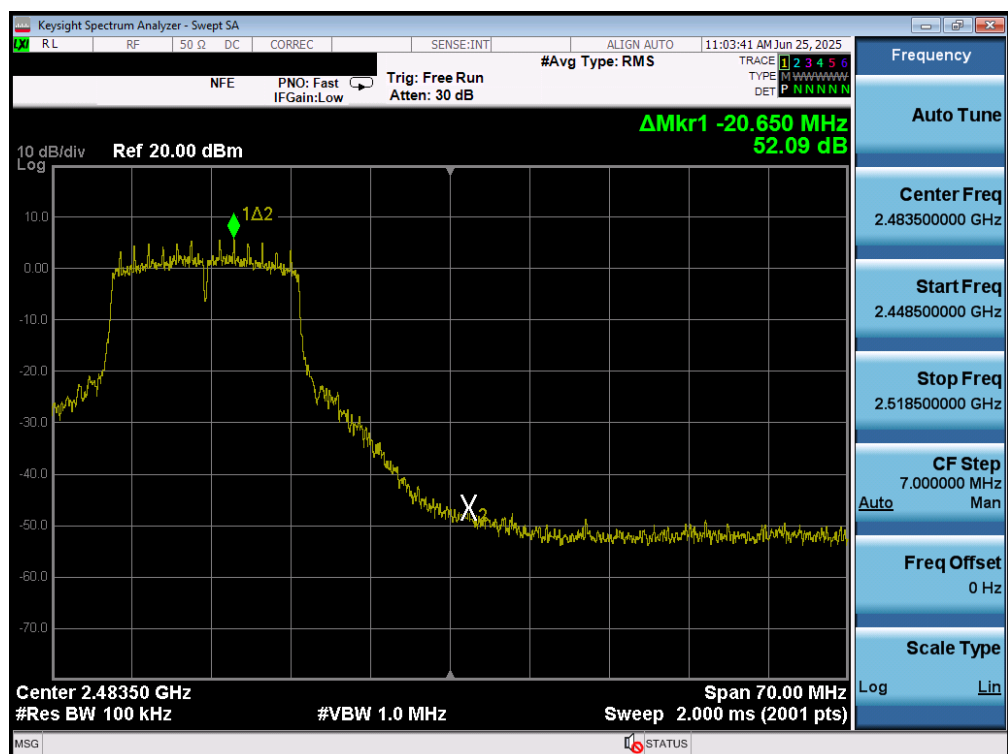


Plot 7-54. Band Edge Plot MIMO ANT1 (802.11g - Ch. 11)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 50 of 85

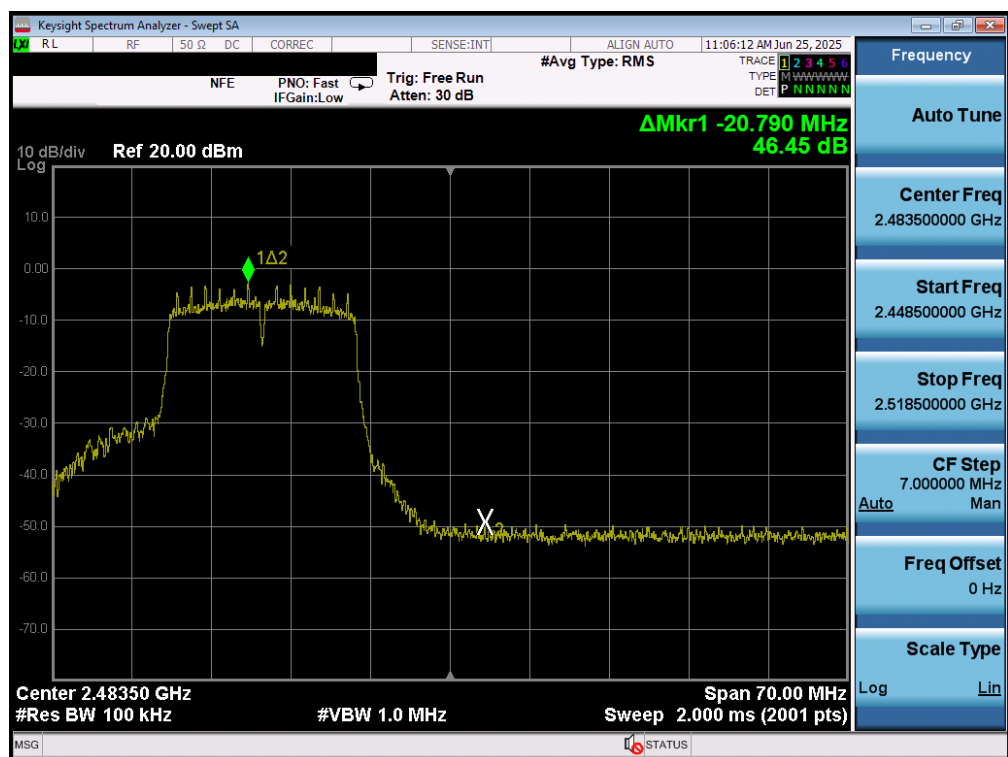


Plot 7-55. Band Edge Plot MIMO ANT1 (802.11g - Ch. 12)

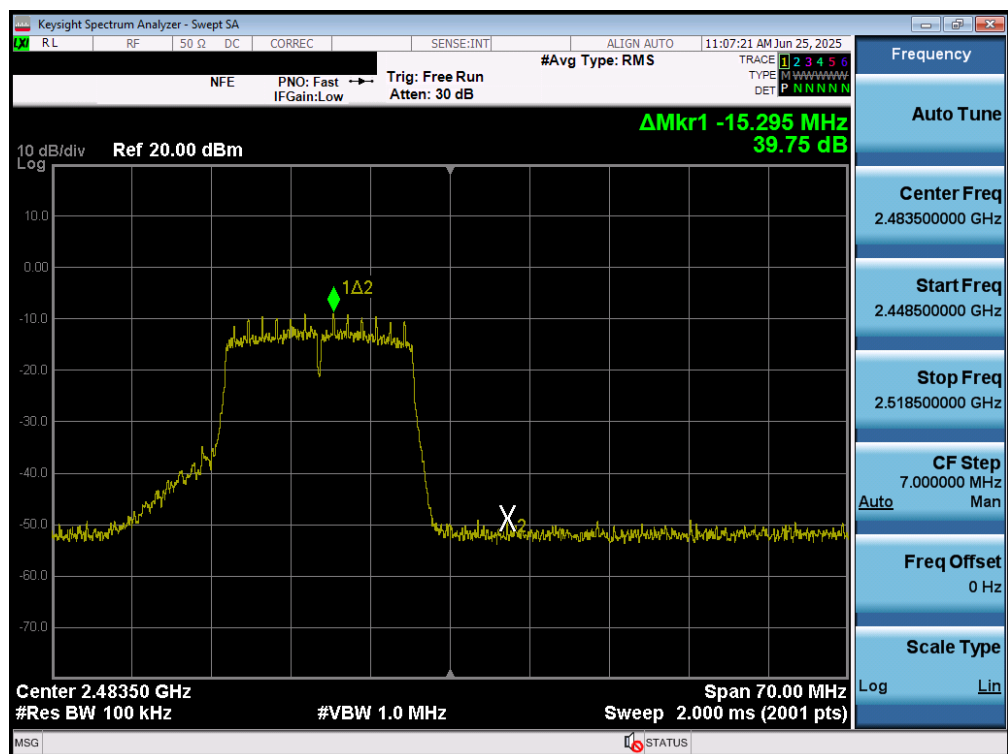


Plot 7-56. Band Edge Plot MIMO ANT1 (802.11g - Ch. 13)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 51 of 85


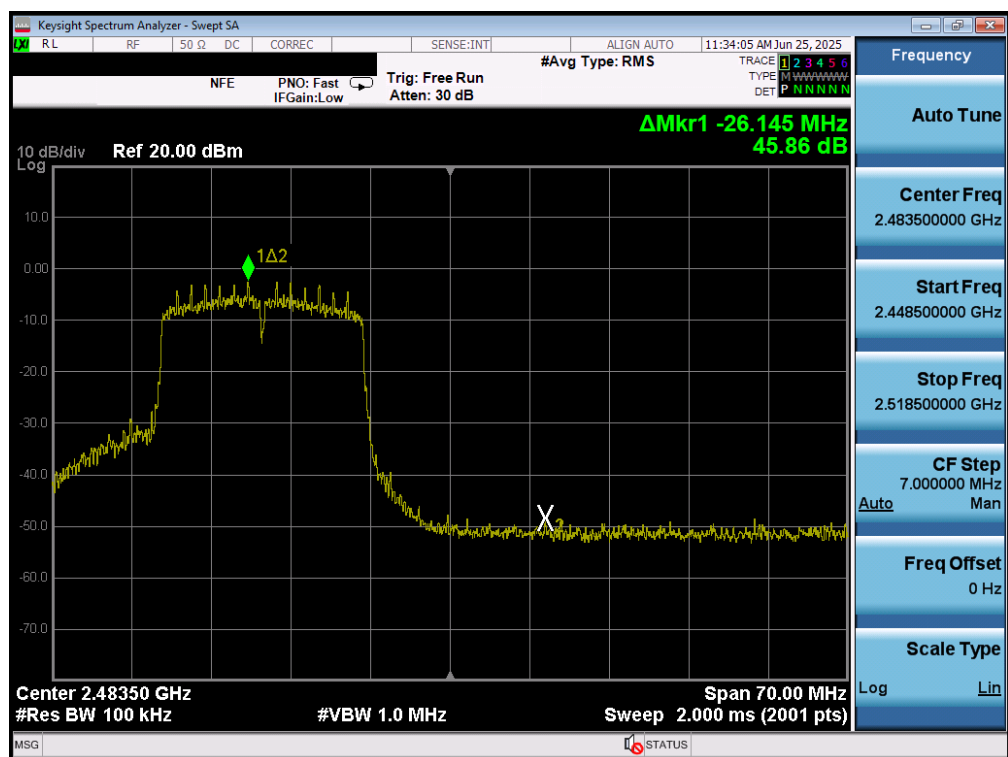



Plot 7-59. Band Edge Plot MIMO ANT1 (802.11n/ac (2.4GHz) – Ch. 12)

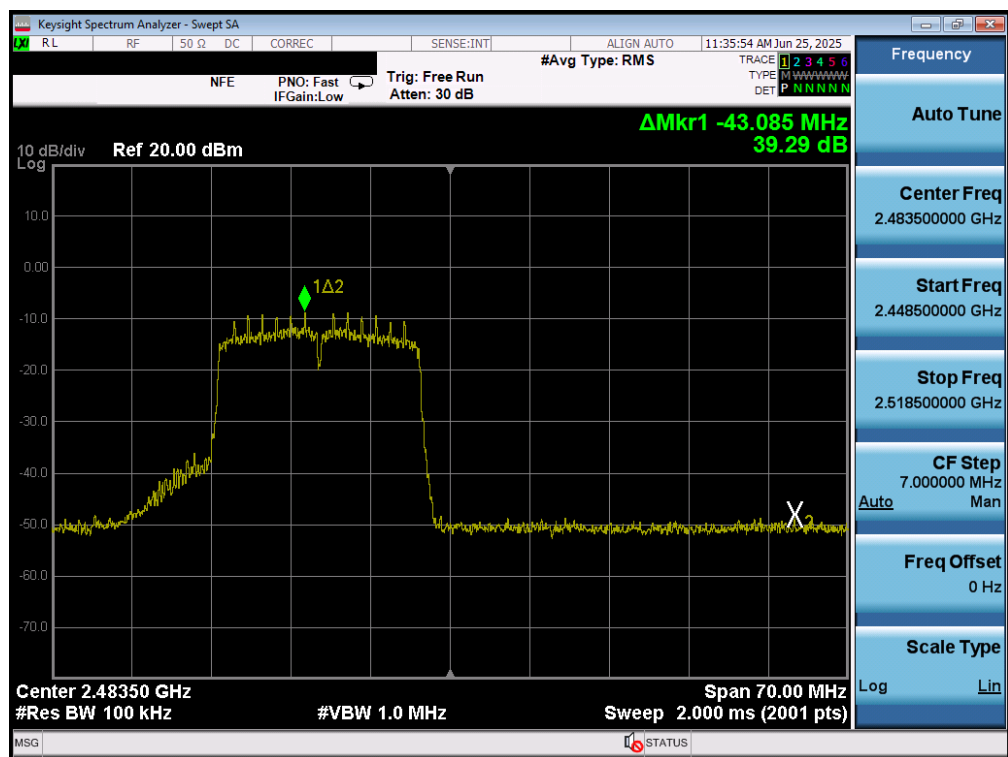


Plot 7-60. Band Edge Plot MIMO ANT1 (802.11n/ac (2.4GHz) – Ch. 13)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 53 of 85

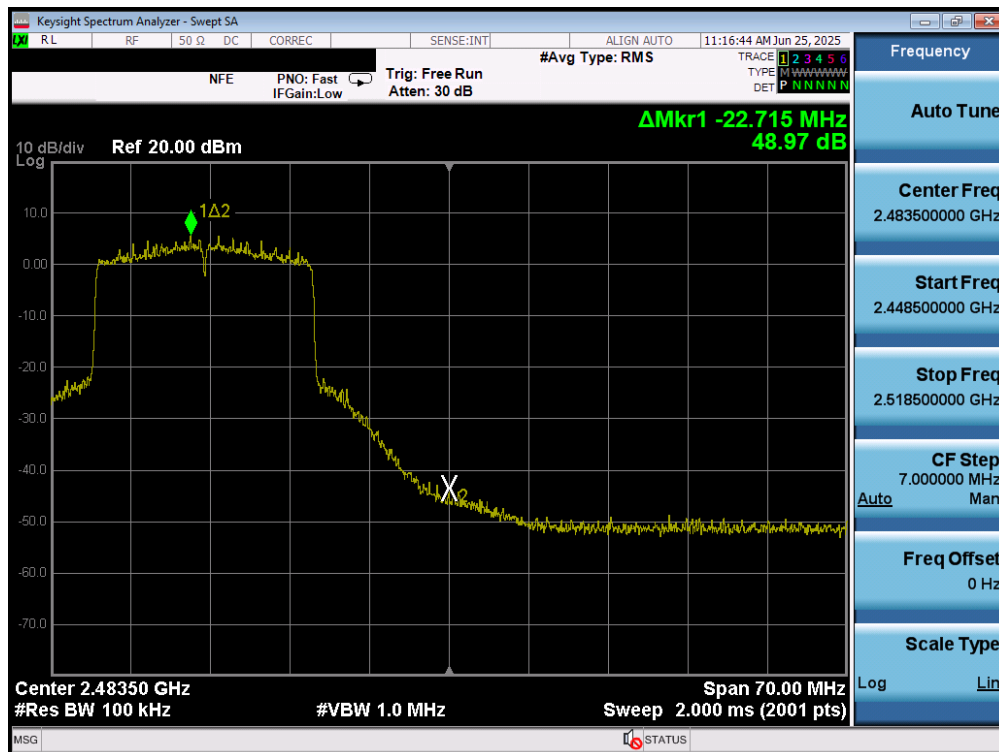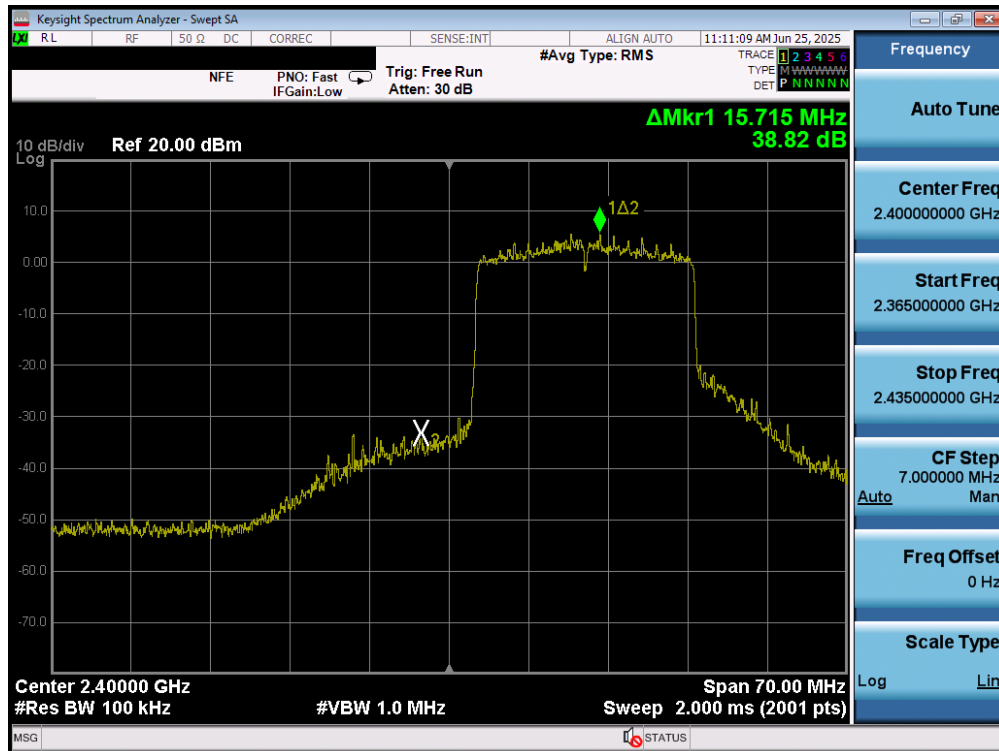

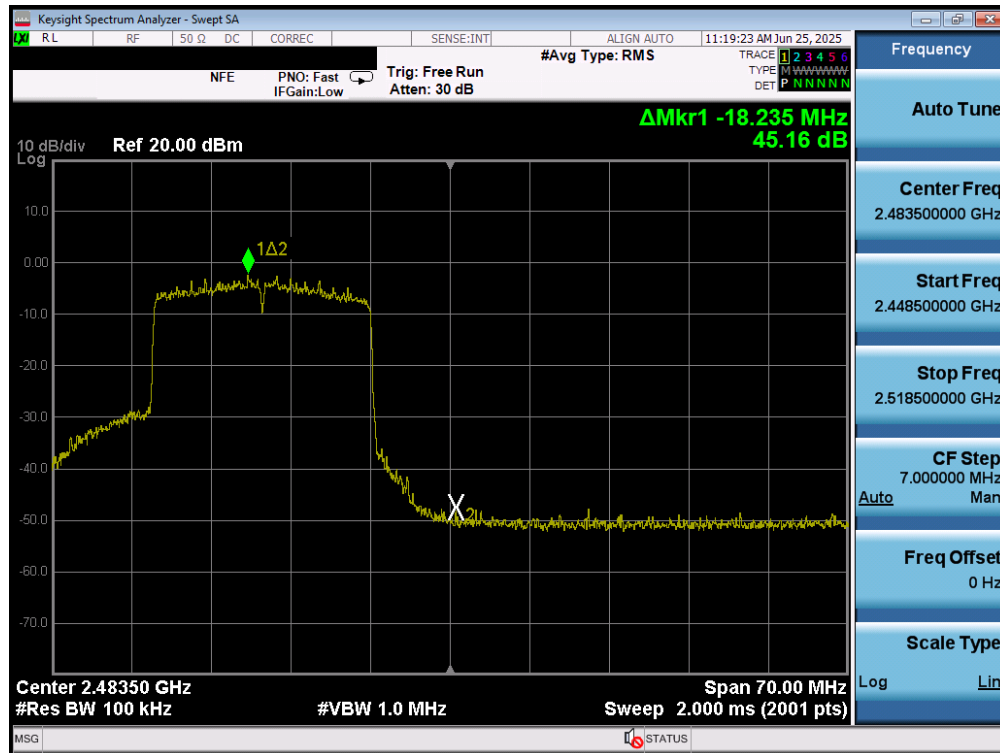


Plot 7-63. Band Edge Plot MIMO ANT1 (802.11ax/be (2.4GHz) – Ch. 12)

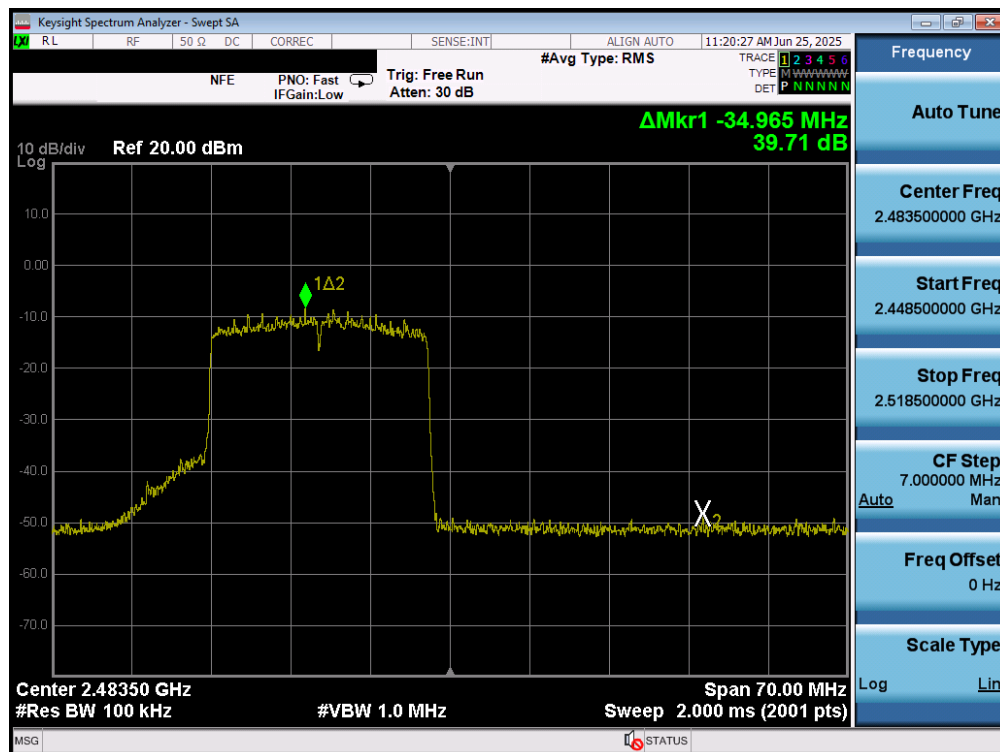


Plot 7-64. Band Edge Plot MIMO ANT1 (802.11ax/be (2.4GHz) – Ch. 13)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 55 of 85

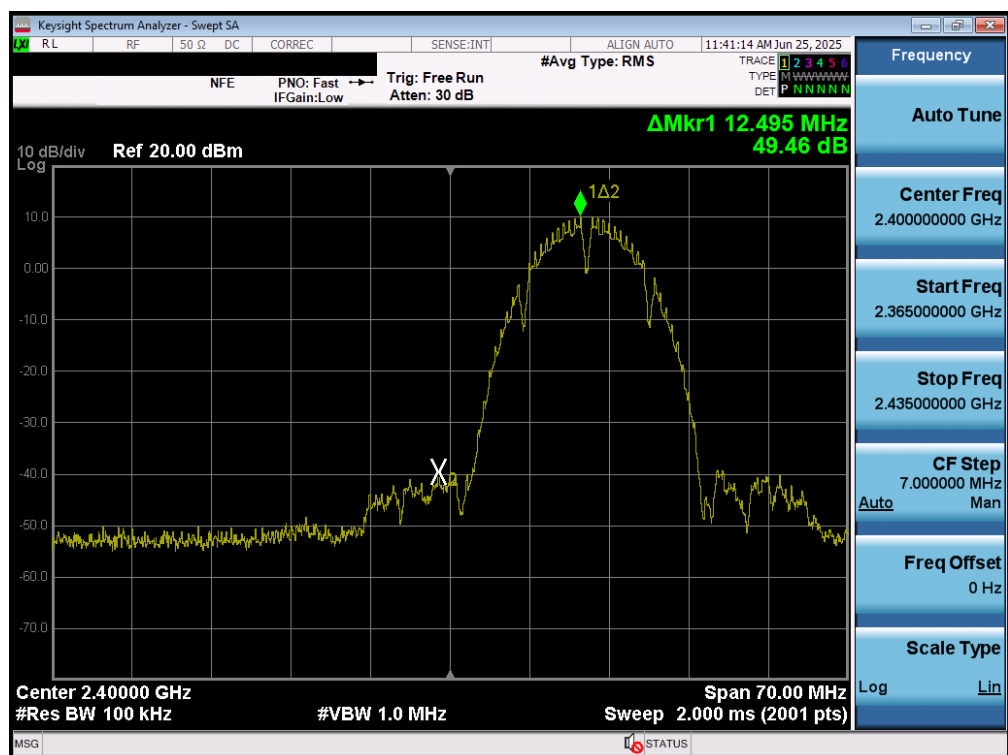


Plot 7-65. Band Edge Plot MIMO ANT2 (802.11b – Ch. 1)

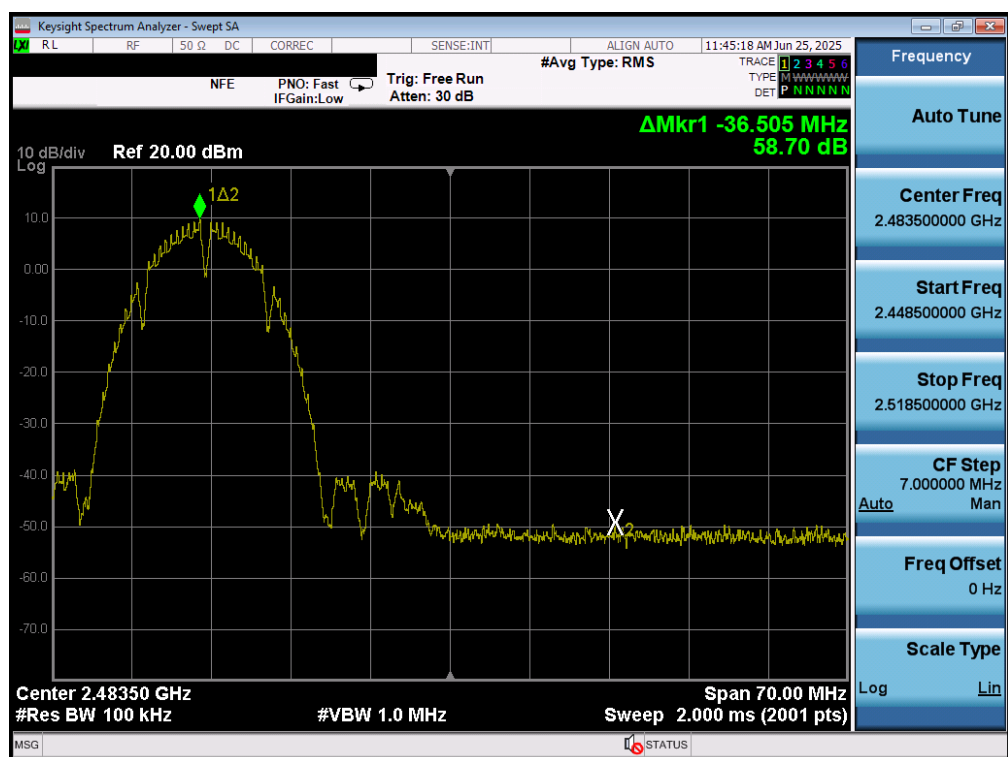


Plot 7-66. Band Edge Plot MIMO ANT2 (802.11b – Ch. 11)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 56 of 85

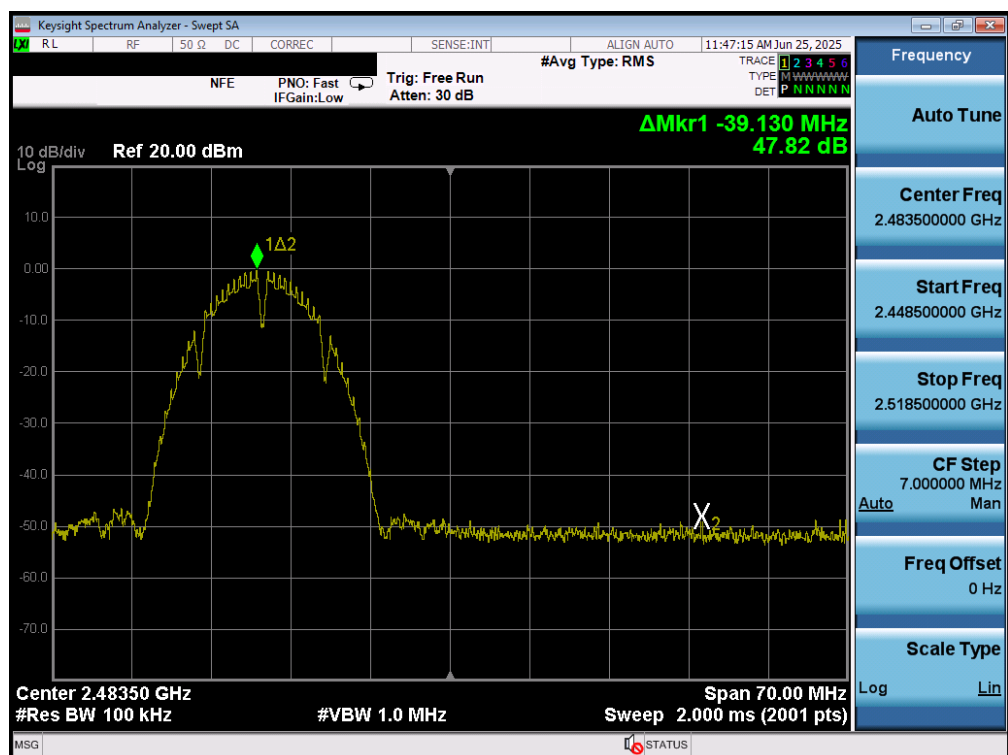


Plot 7-67. Band Edge Plot MIMO ANT2 (802.11b – Ch. 12)

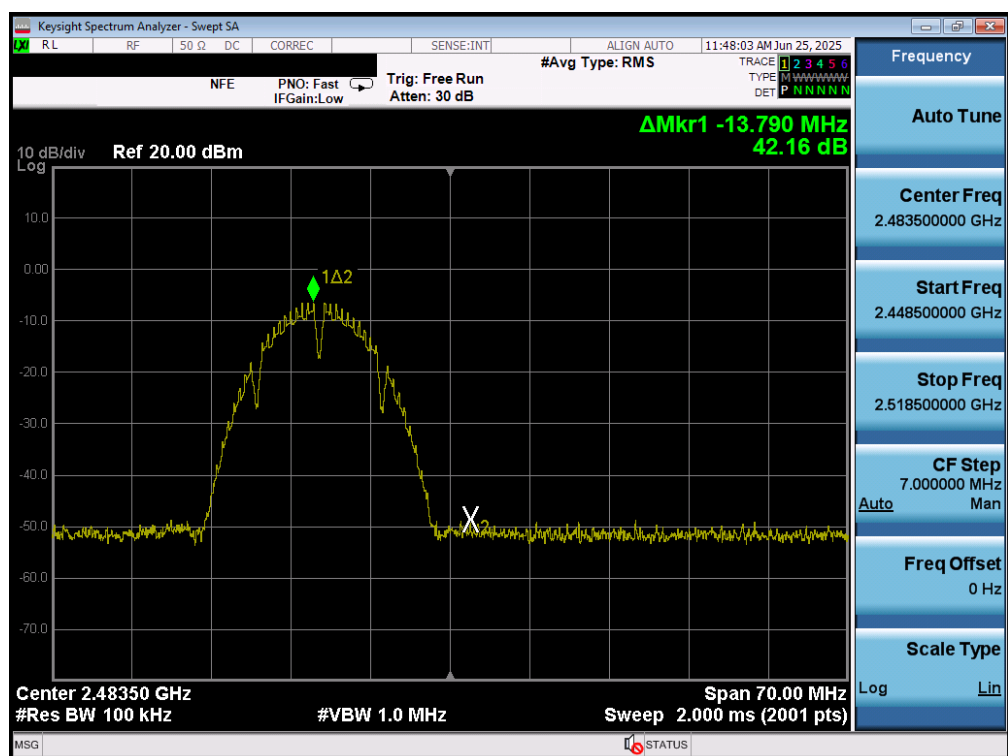


Plot 7-68. Band Edge Plot MIMO ANT2 (802.11b – Ch. 13)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 57 of 85

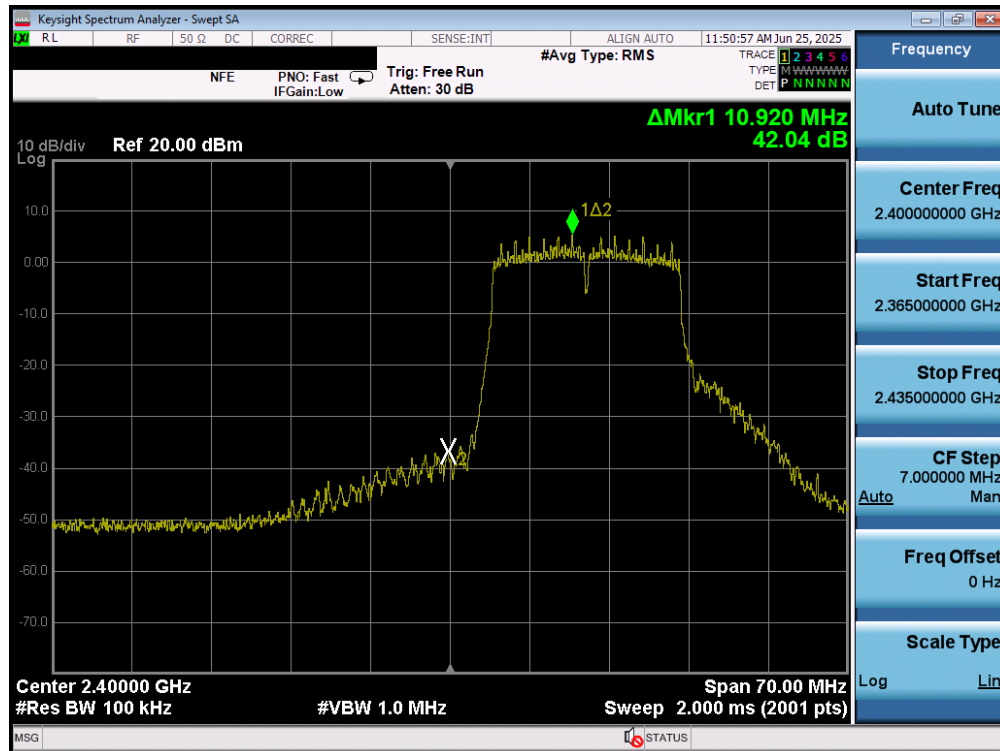


Plot 7-69. Band Edge Plot MIMO ANT2 (802.11g- Ch. 1)

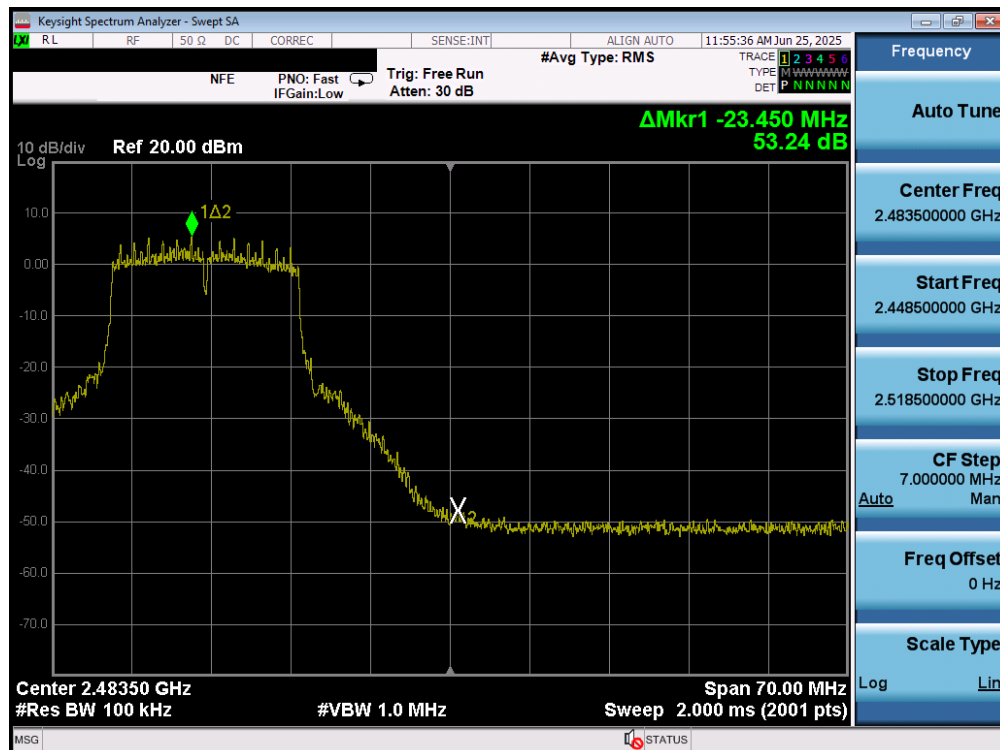


Plot 7-70. Band Edge Plot MIMO ANT2 (802.11g - Ch. 11)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 58 of 85


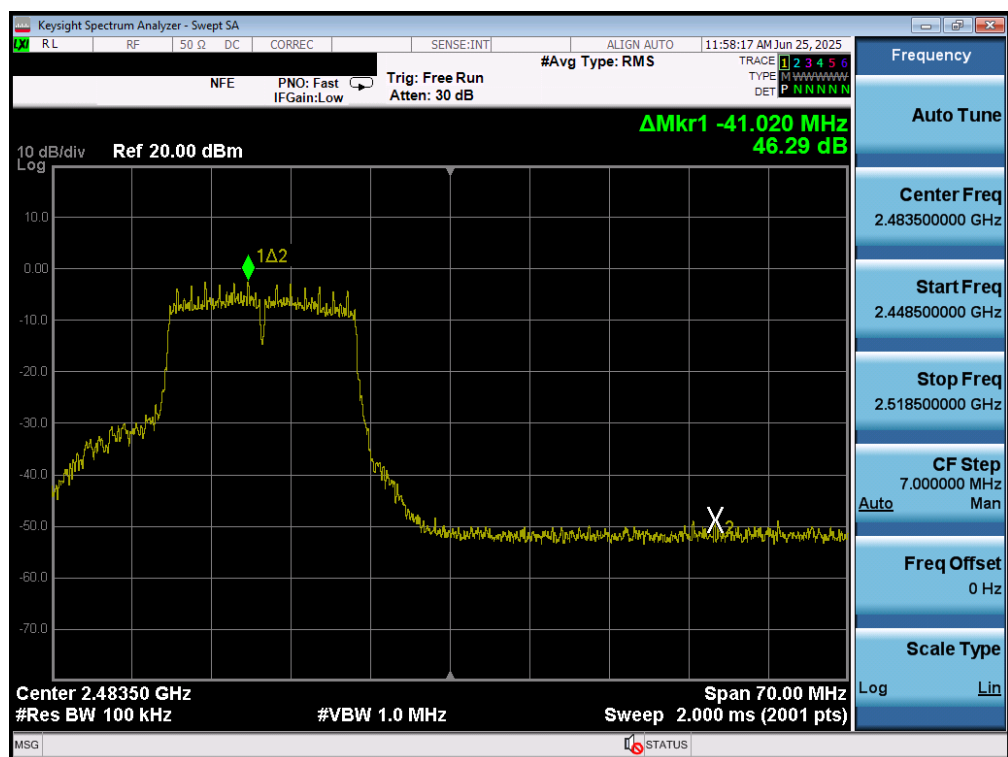


Plot 7-71. Band Edge Plot MIMO ANT2 (802.11g – Ch. 12)

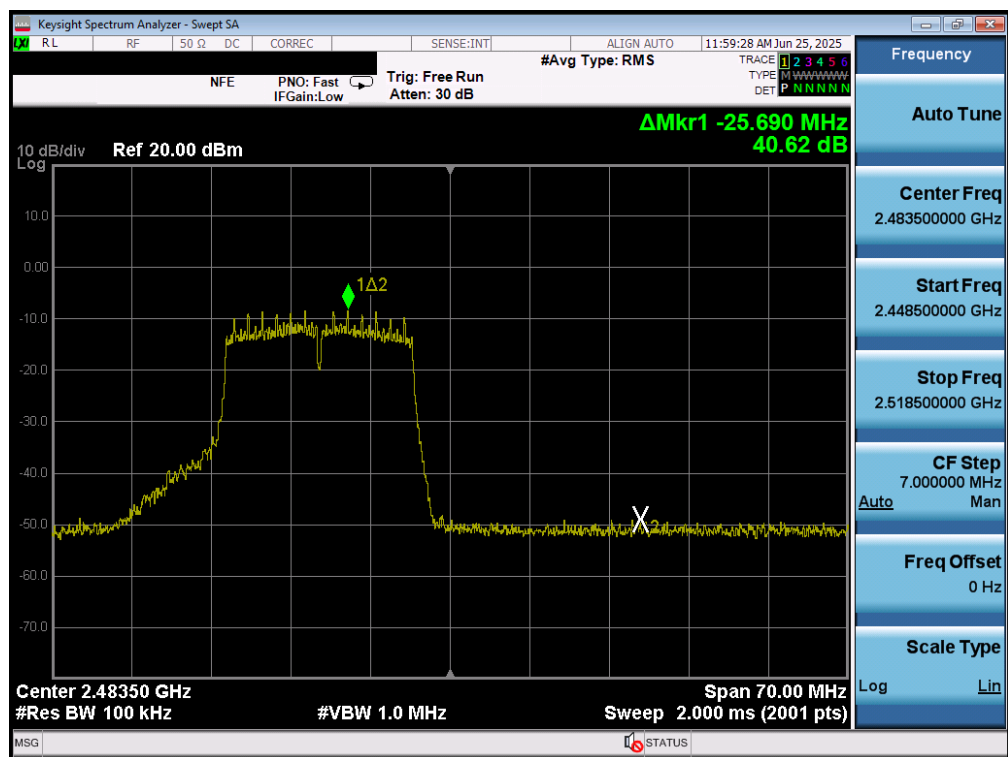


Plot 7-72. Band Edge Plot MIMO ANT2 (802.11g – Ch. 13)


FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 59 of 85

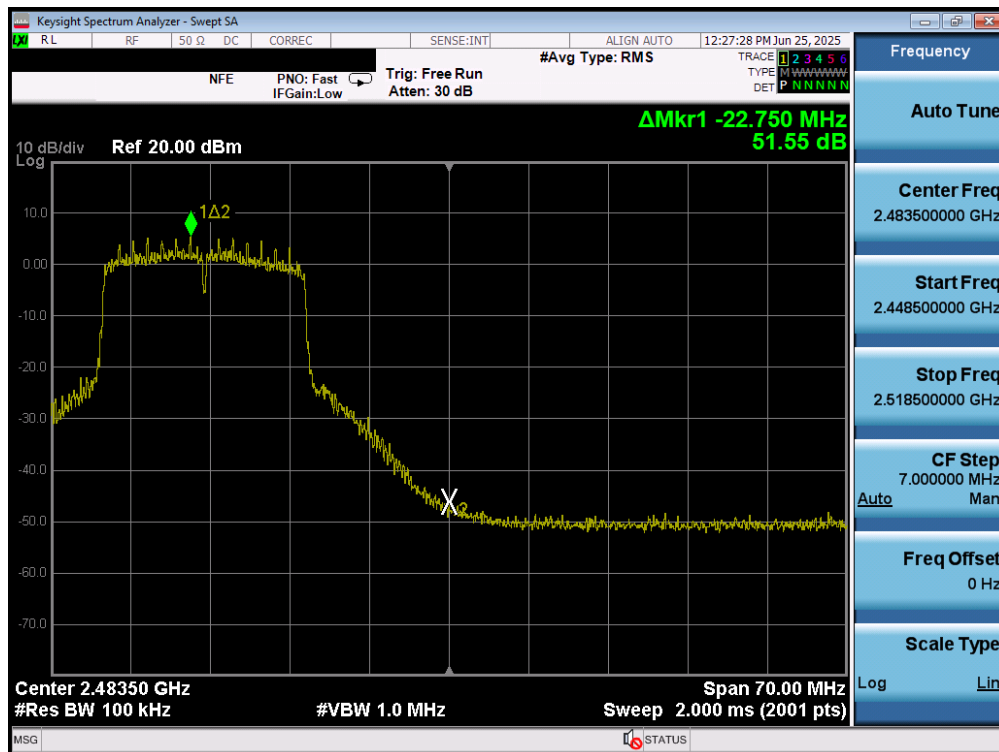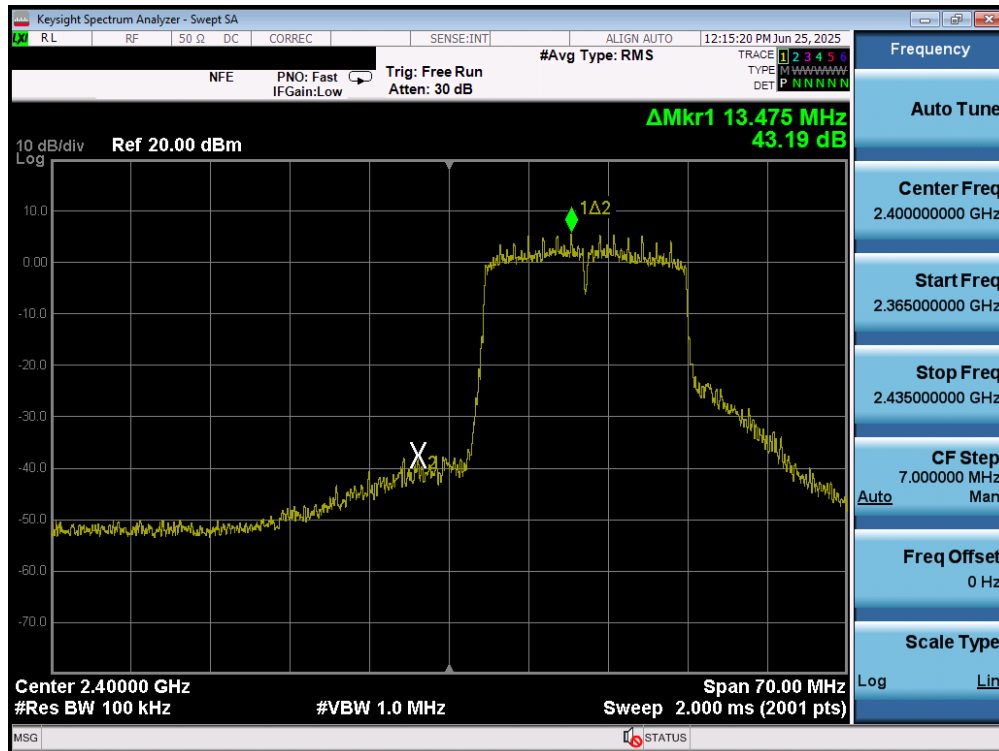

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 60 of 85

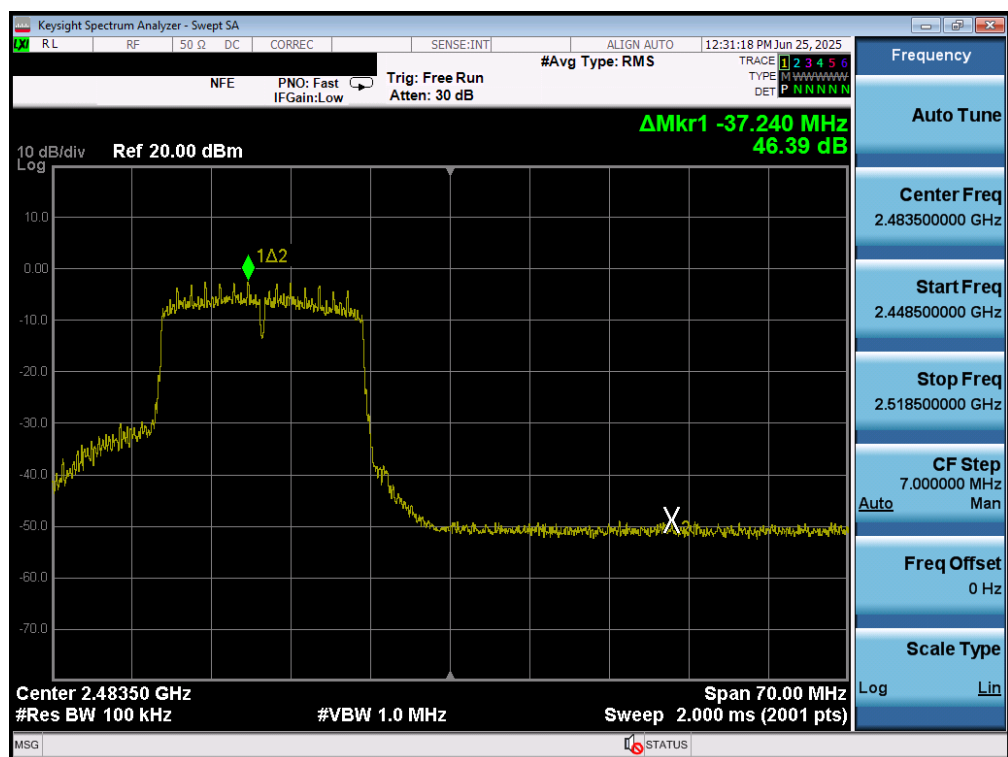


Plot 7-75. Band Edge Plot MIMO ANT2 (802.11n/ac (2.4GHz) – Ch. 12)

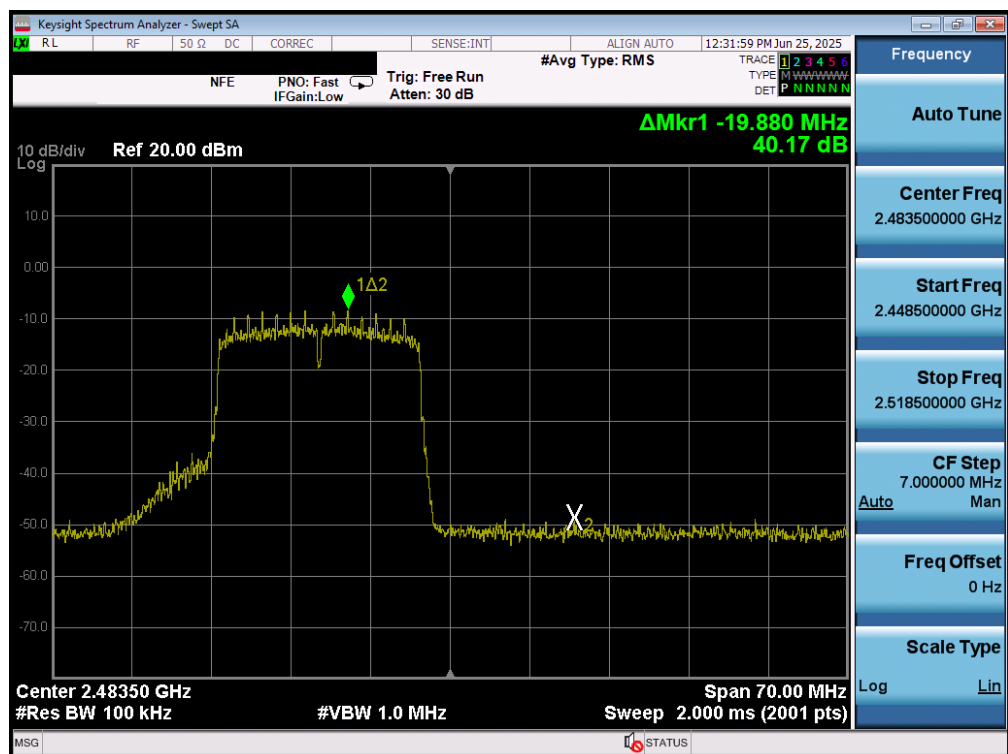


Plot 7-76. Band Edge Plot MIMO ANT2 (802.11n/ac (2.4GHz) – Ch. 13)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 61 of 85

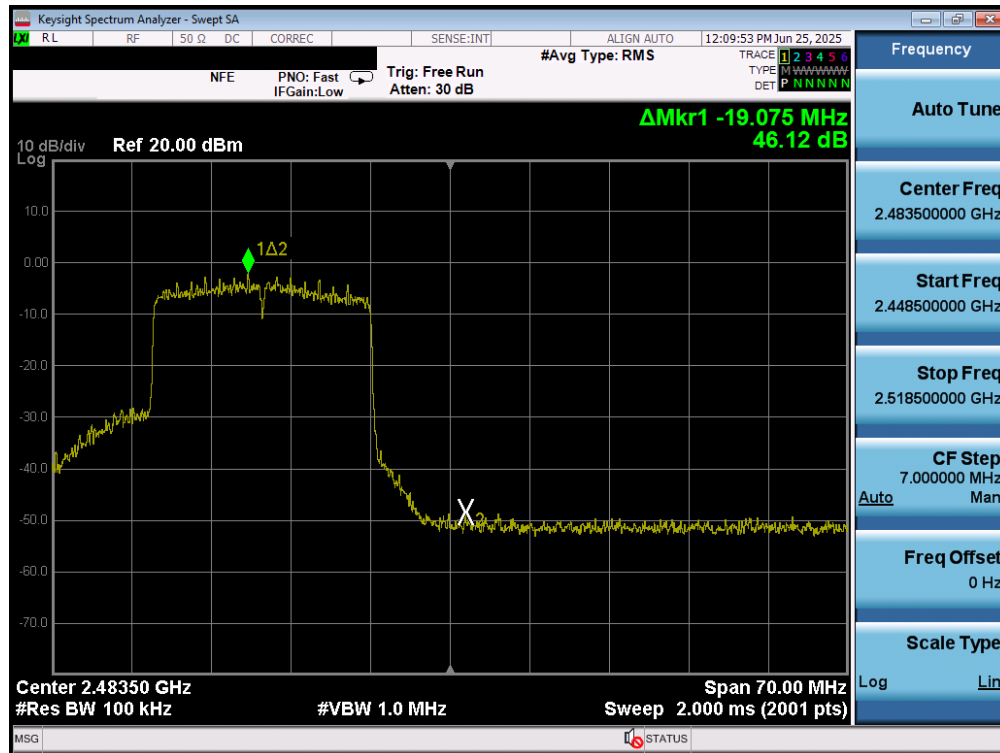

Plot 7-79. Band Edge Plot MIMO ANT2 (802.11ax/be (2.4GHz) – Ch. 12)

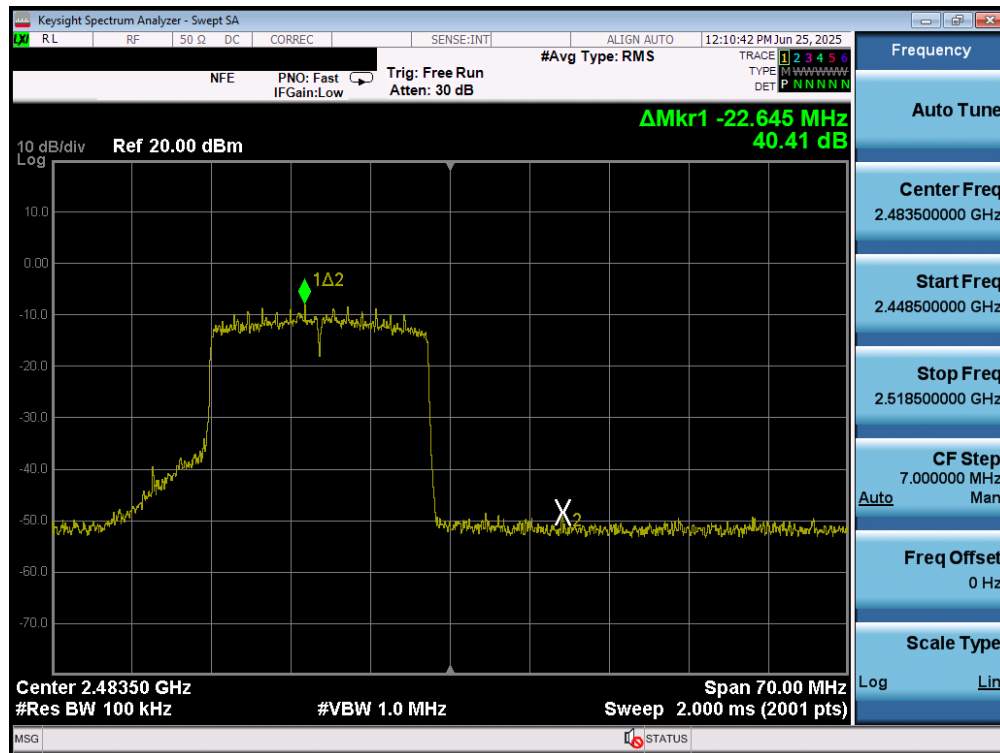

Plot 7-80. Band Edge Plot MIMO ANT2 (802.11ax/be (2.4GHz) – Ch. 13)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 63 of 85

7.6 Conducted Spurious Emissions

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. For the following out of band conducted spurious emissions plots, the EUT was investigated in all available data rates for “b”, “g”, “n”, “ax” modes. The worst-case spurious emissions for the 2.4GHz band were found while transmitting in “b” mode at 1 Mbps and are shown in the plots below.

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the procedure in Section 11.11.3 of ANSI C63.10:2020.

Test Procedure Used

ANSI C63.10:2020 – Section 11.11.3
ANSI C63.10:2020 – Section 14.5.2.3

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-5. Test Instrument & Measurement Setup


FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 64 of 85

Test Notes


1. RBW was set to 1MHz rather than 100kHz in order to increase the measurement speed.
2. The display line shown in the following plots denotes the limit at 30dB below the fundamental emission level measured in a 100kHz bandwidth. However, since the traces in the following plots are measured with a 1MHz RBW, the display line may not necessarily appear to be 30dB below the level of the fundamental in a 1MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.
4. The conducted spurious emissions were measured to relative limits. Therefore, in accordance with ANSI C63.10:2020 Section 14.5.2.3, it was unnecessary to show compliance through the summation of test results of the individual outputs.

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 65 of 85

MIMO Conducted Spurious Emissions

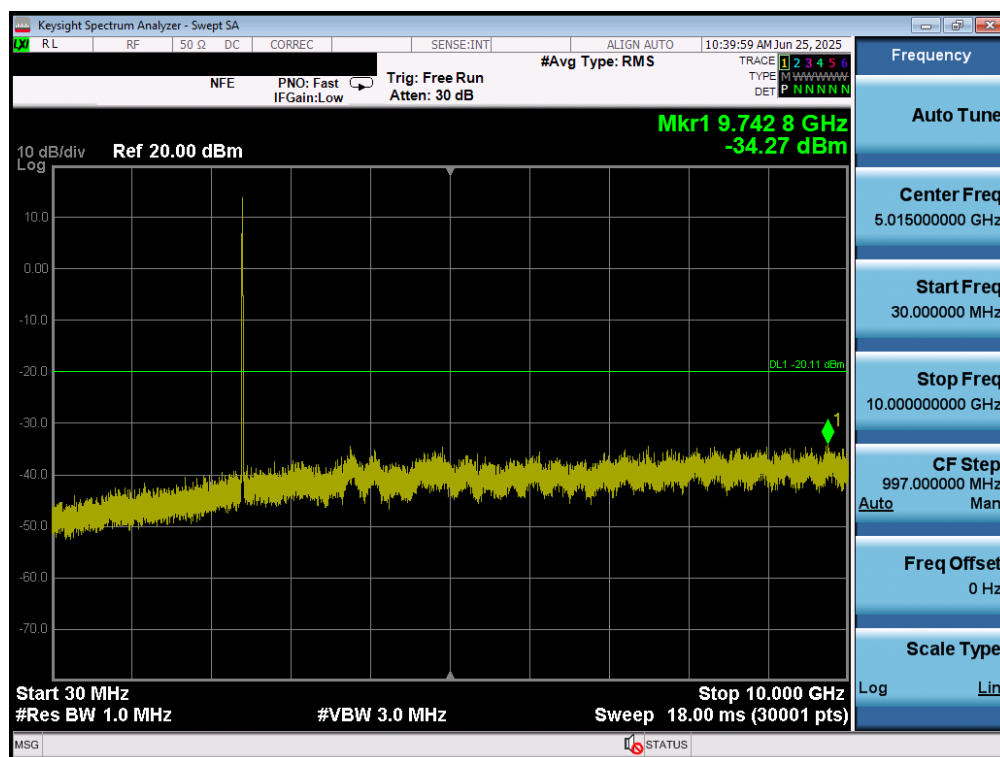


Plot 7-81. Conducted Spurious Plot MIMO ANT1 (802.11b – Ch. 1)

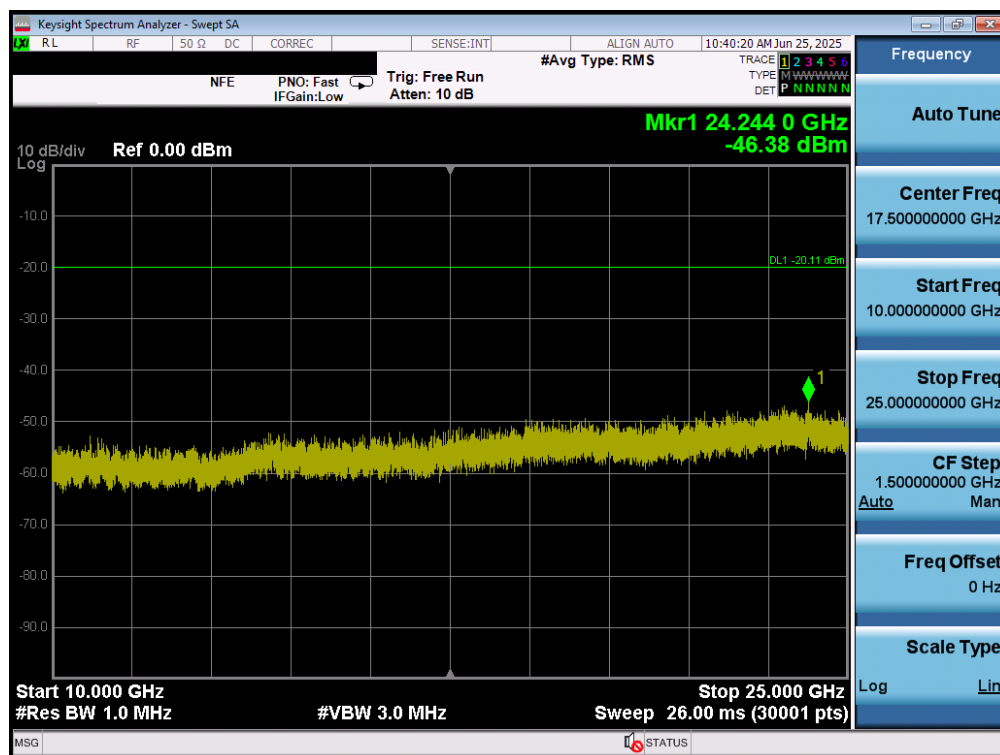


Plot 7-82. Conducted Spurious Plot MIMO ANT1 (802.11b – Ch. 1)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 66 of 85

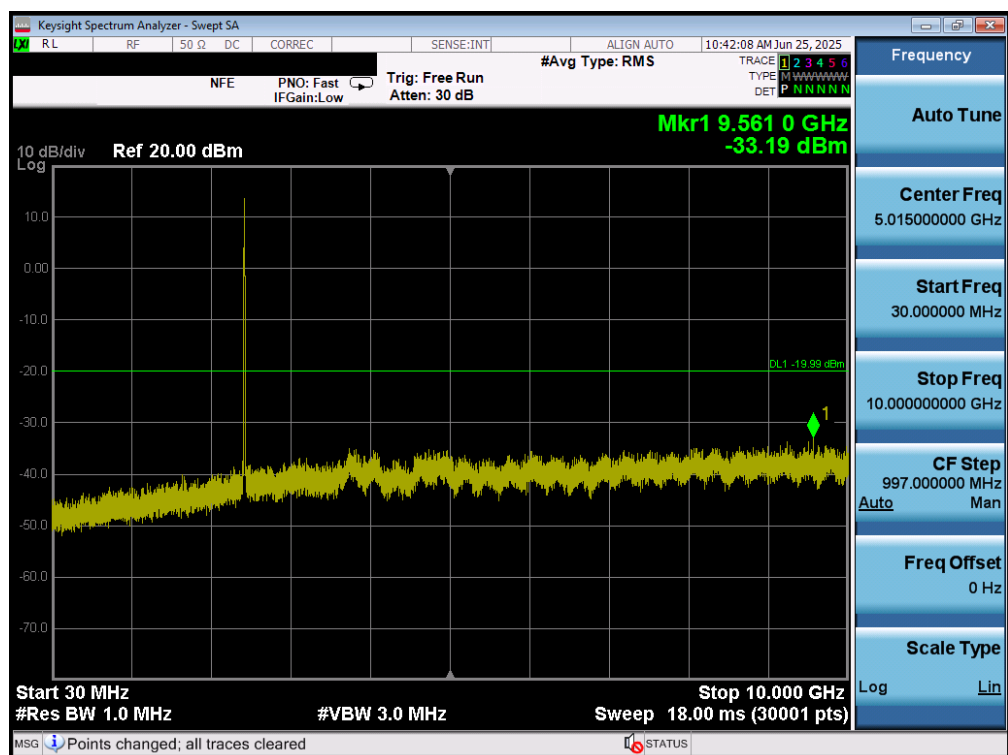


Plot 7-83. Conducted Spurious Plot MIMO ANT1 (802.11b – Ch. 6)

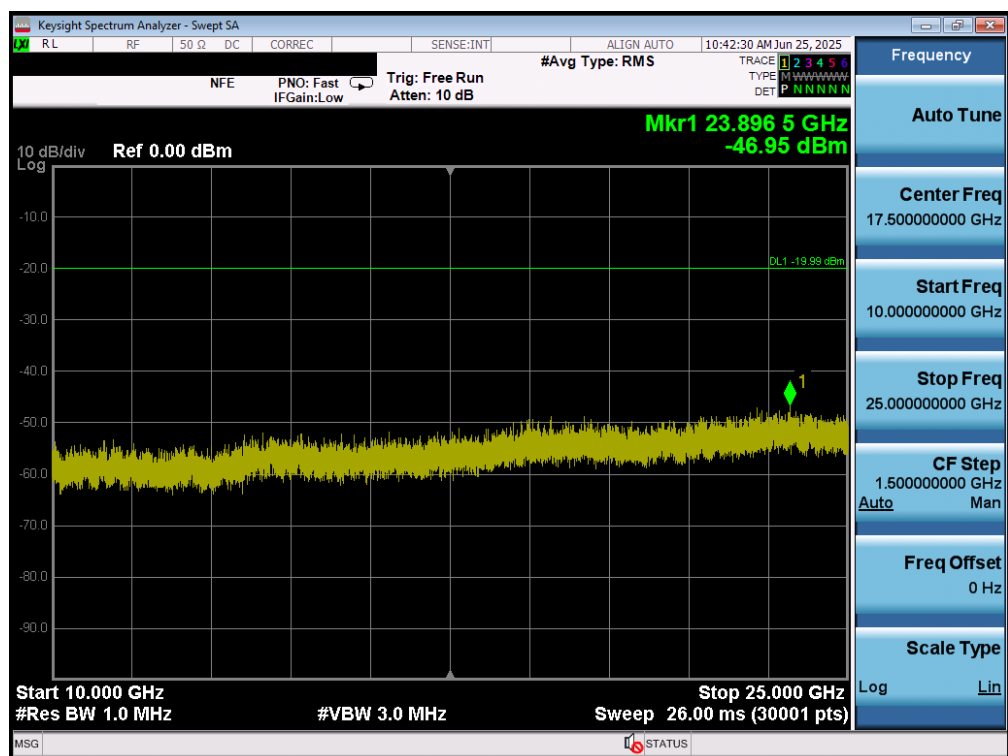


Plot 7-84. Conducted Spurious Plot MIMO ANT1 (802.11b – Ch. 6)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 67 of 85

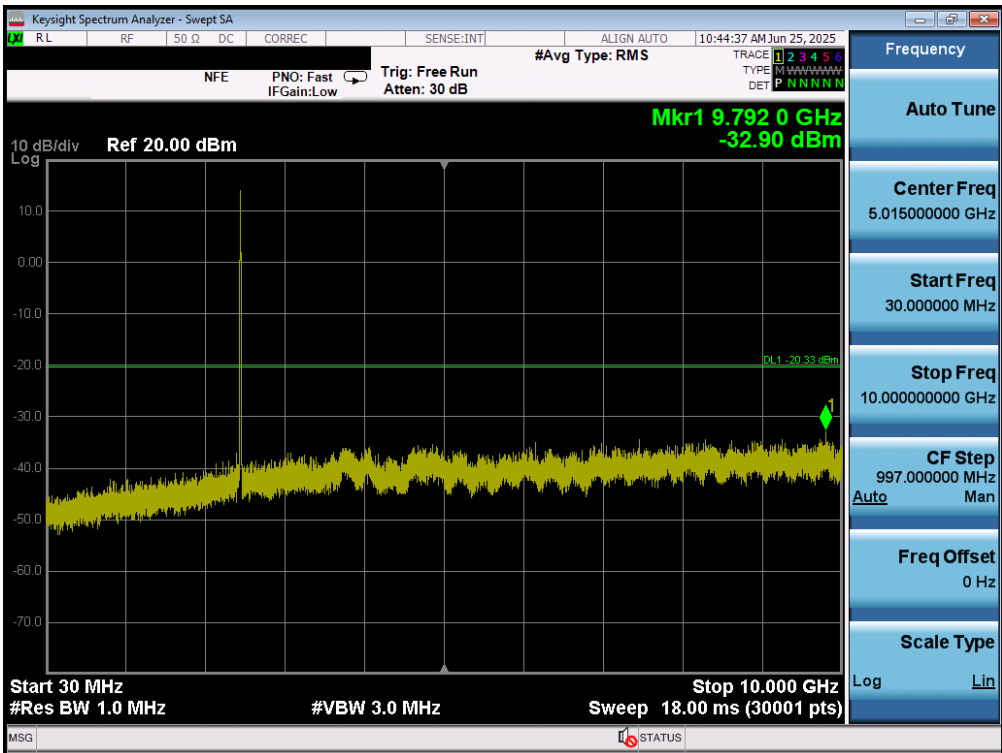


Plot 7-85. Conducted Spurious Plot MIMO ANT1 (802.11b – Ch. 11)

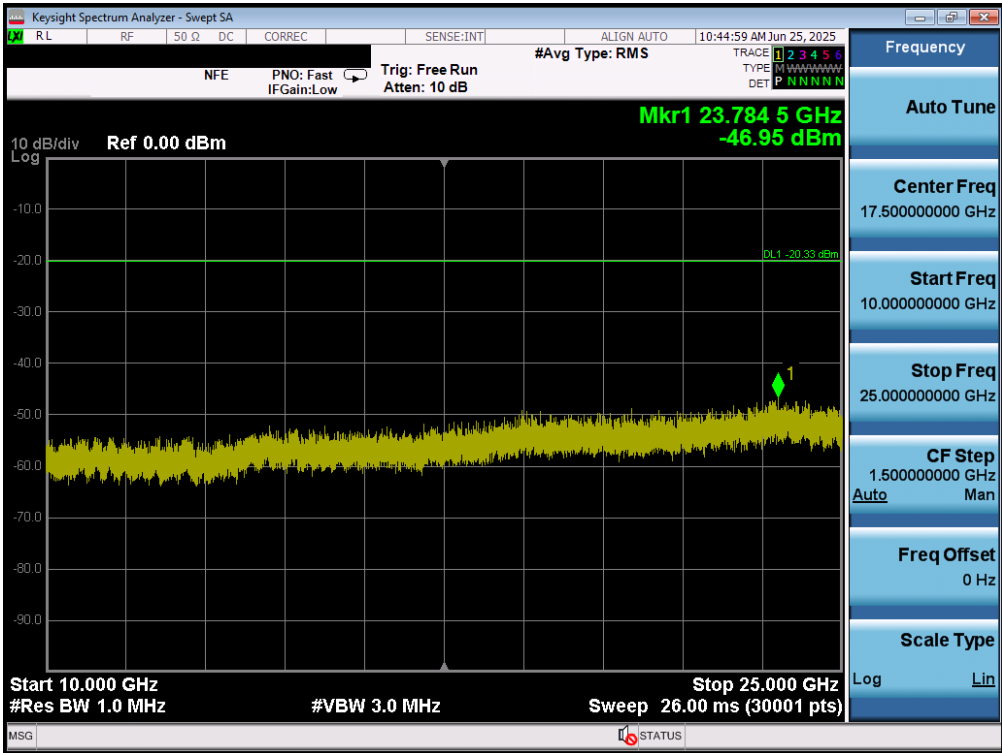


Plot 7-86. Conducted Spurious Plot MIMO ANT1 (802.11b – Ch. 11)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 68 of 85

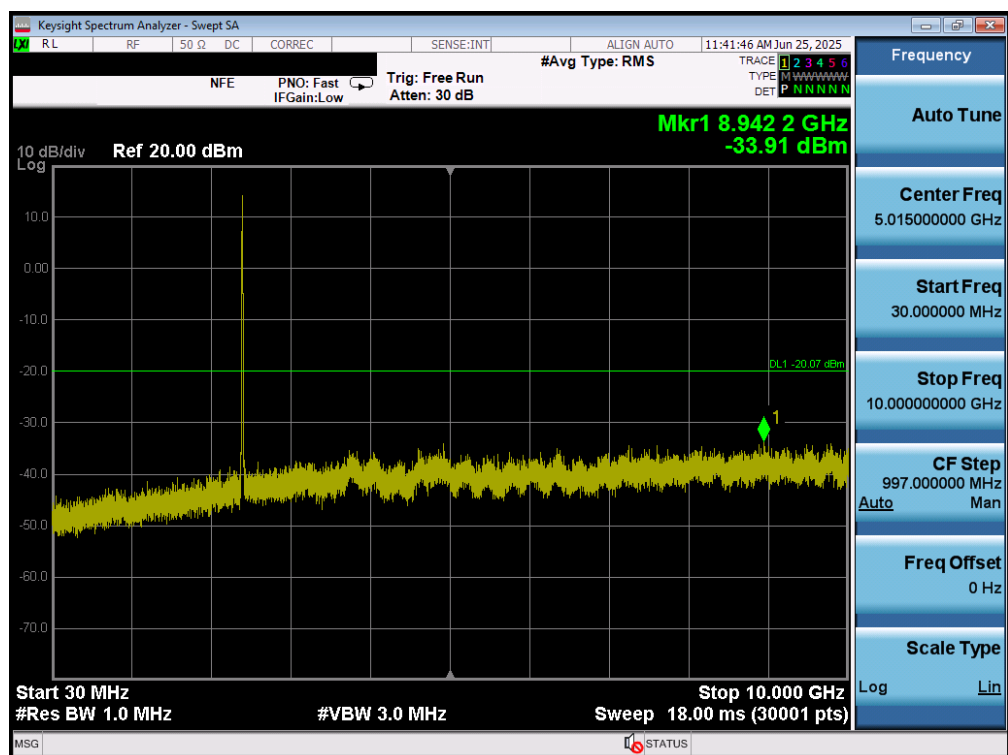


Plot 7-87. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 1)

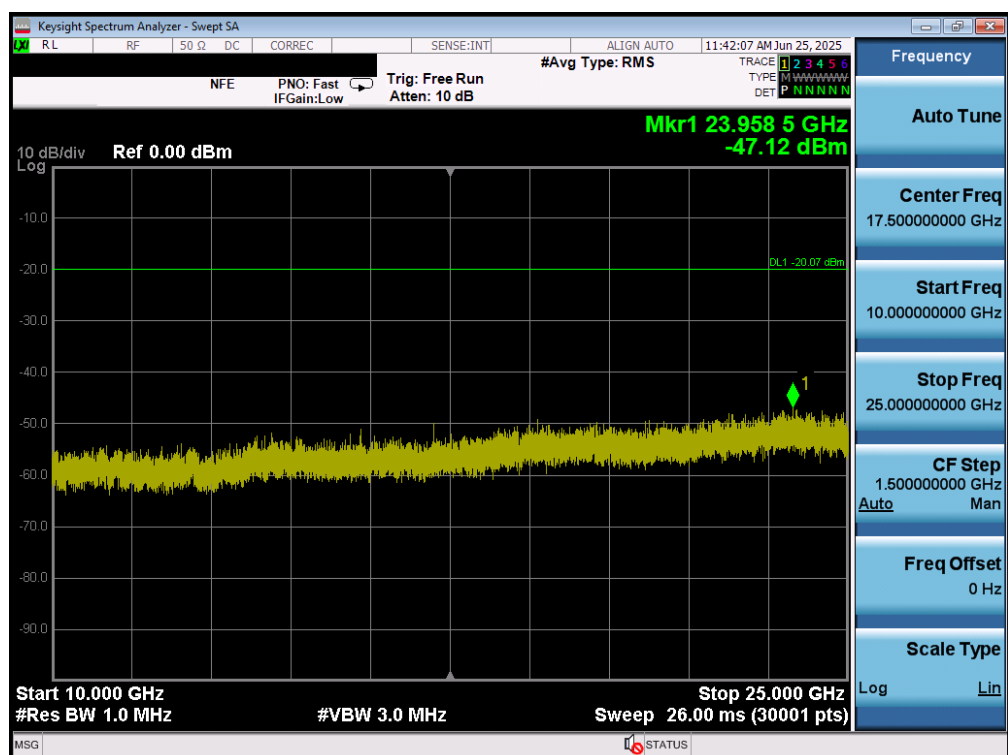


Plot 7-88. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 1)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 69 of 85

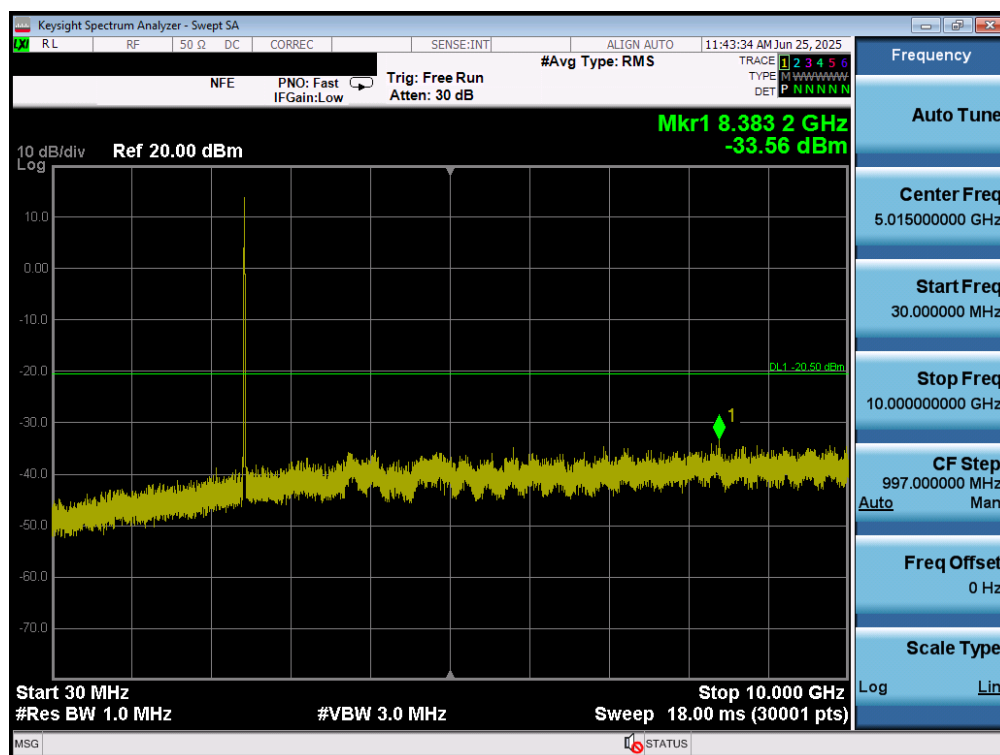


Plot 7-89. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 6)

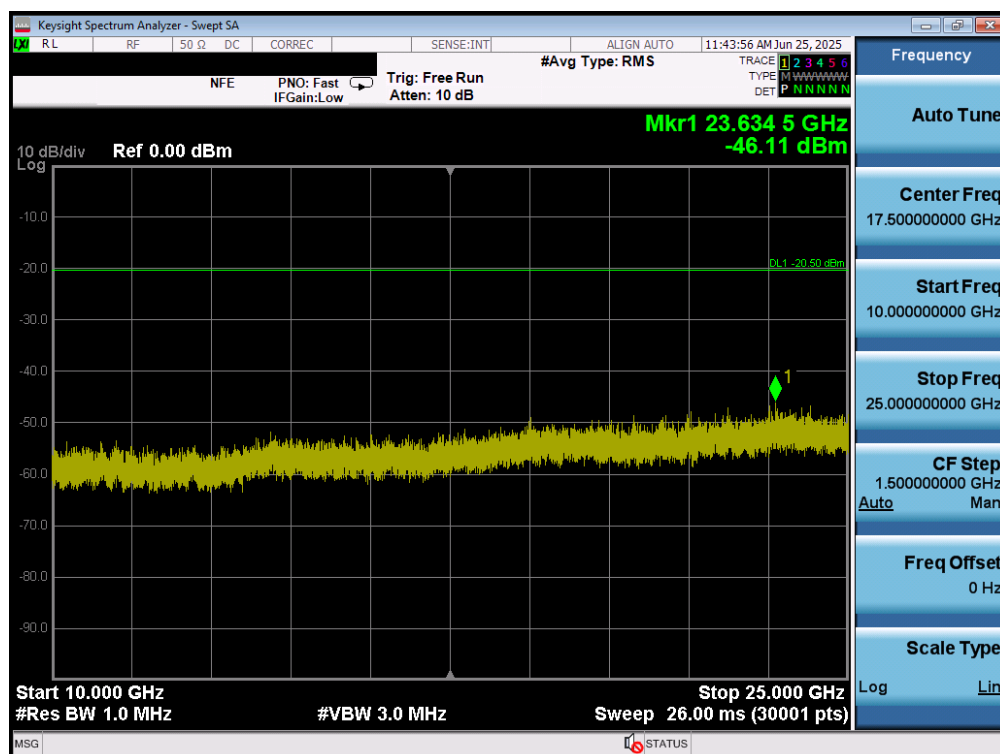


Plot 7-90. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 6)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 70 of 85

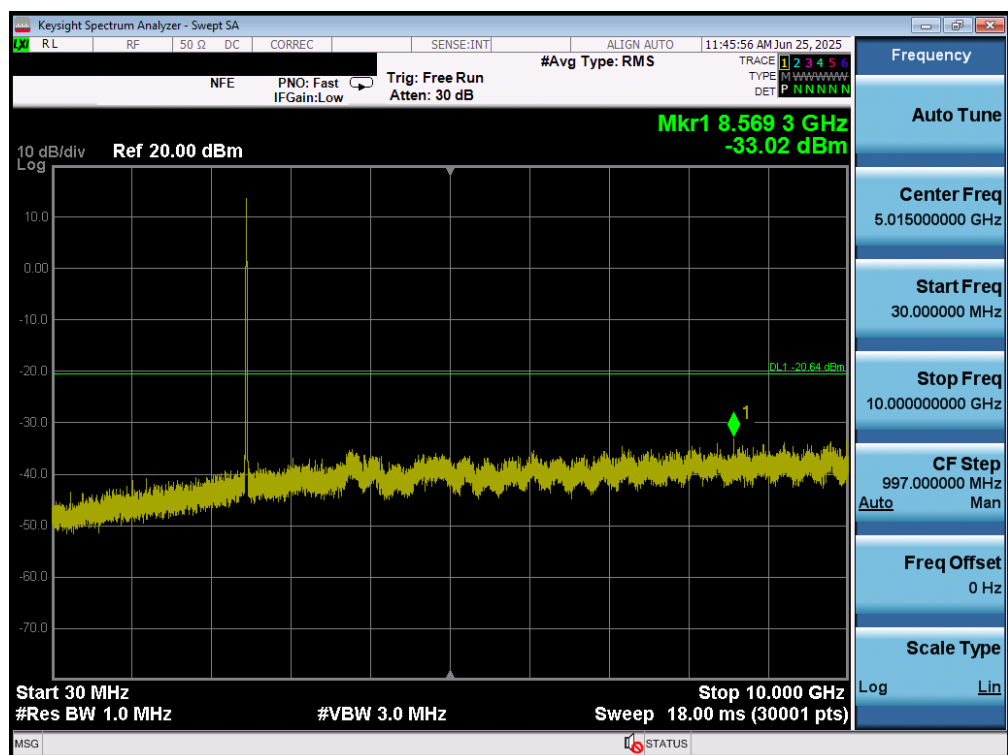

Plot 7-91. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 11)

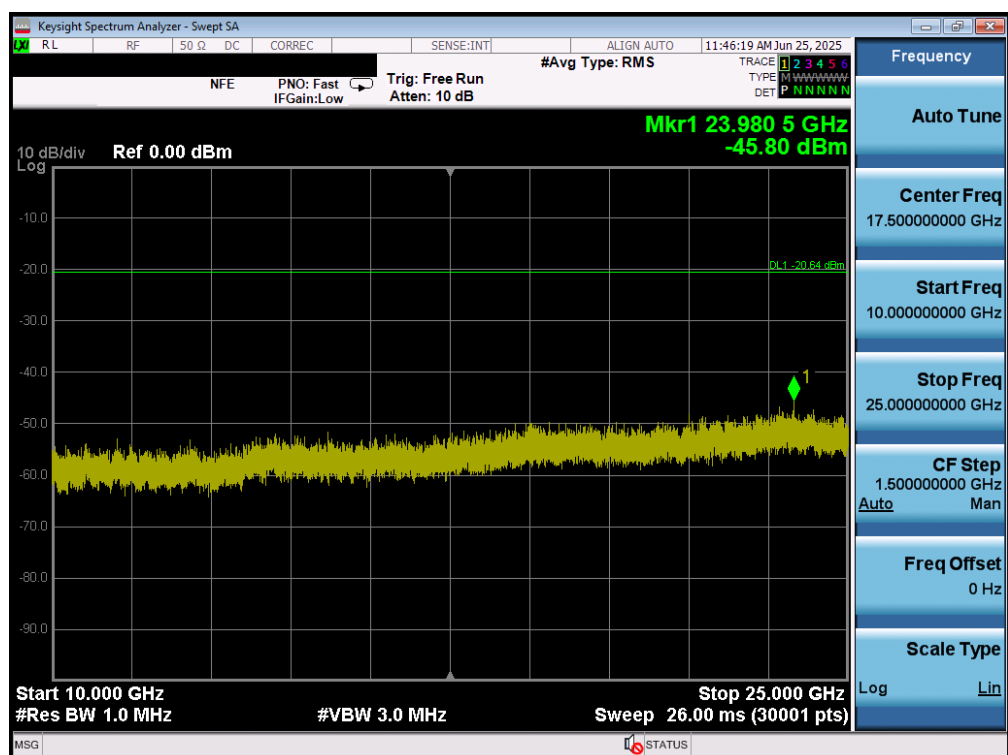

Plot 7-92. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 11)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 71 of 85

7.7 Radiated Emission Measurements

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst-case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in FCC §15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown FCC §15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-9. Radiated Limits

Test Procedures Used

ANSI C63.10:2020 – Section 6.6.4.3

Test Settings – Above 1GHz

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 72 of 85

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Settings – Below 1GHz

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

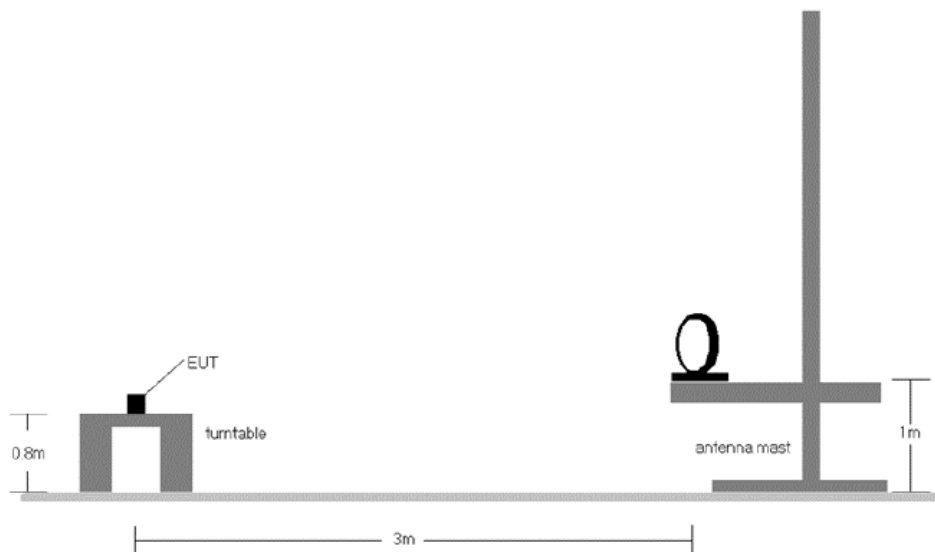


Figure 7-6. Radiated Test Setup < 30MHz

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 73 of 85

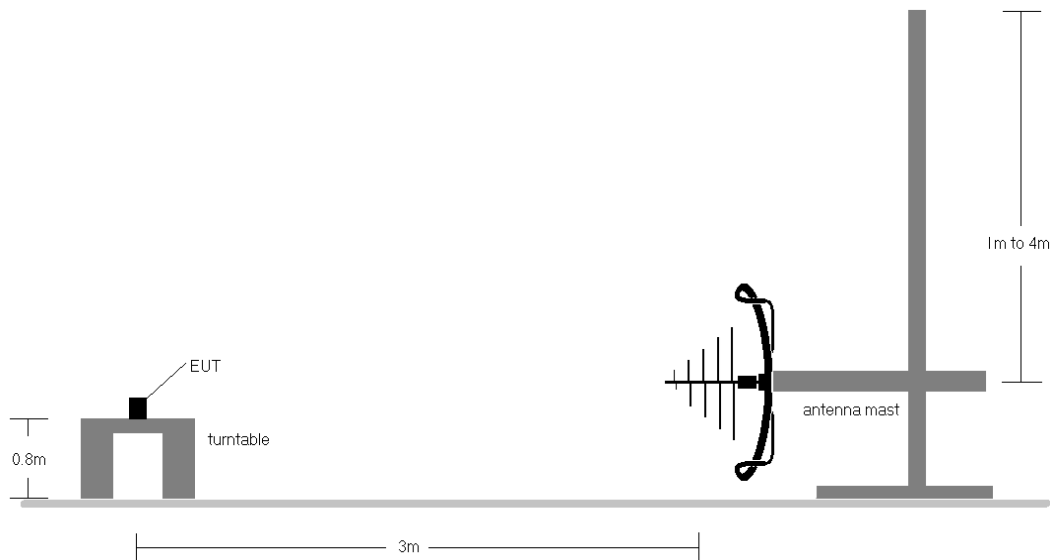


Figure 7-7. Radiated Test Setup < 1GHz

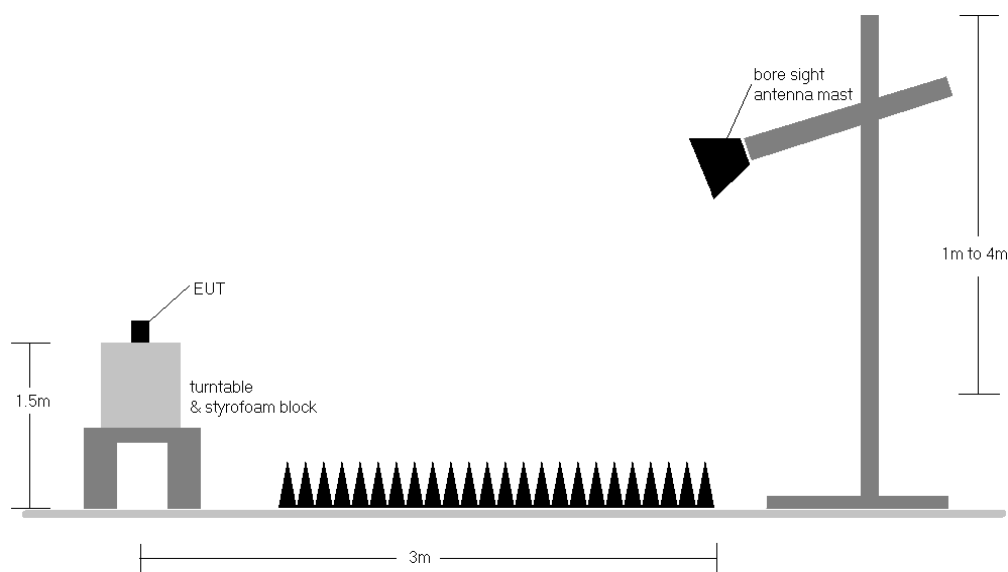


Figure 7-8. Radiated Test Setup > 1GHz

Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of ANSI C63.10:2020 Section 11.12.2 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limits shown in §15.209.

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 74 of 85

3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
6. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
7. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
8. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst-case results during the transmitter spurious emissions testing.
9. No spurious emissions were detected within 20dB of the limit below 30MHz.
10. The results recorded using the broadband antenna are known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
11. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.7 was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-03.A3L	Test Dates: 05/13/2025 - 07/01/2025	EUT Type: Portable Tablet	Page 75 of 85