



7.7.8 MIMO Radiated Band Edge Measurements (160MHz BW - Punctured)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

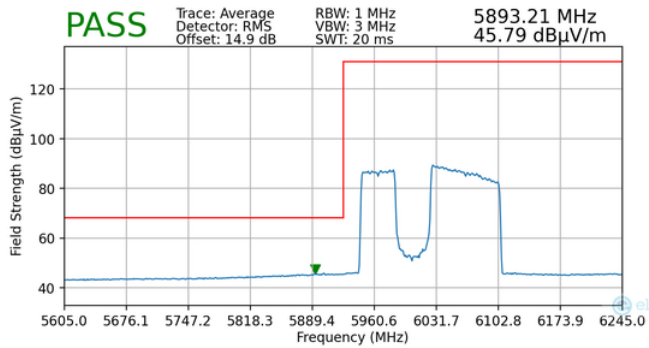


Plot 7-87. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5)

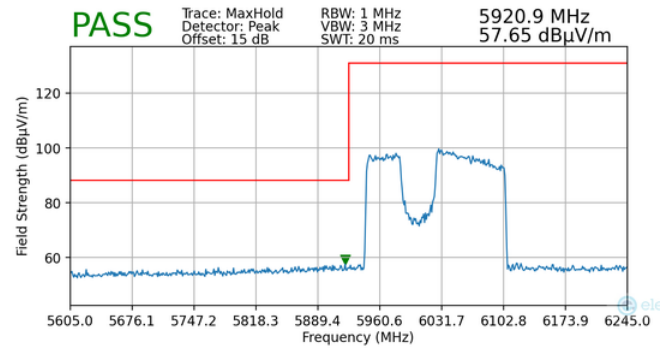


Plot 7-88. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6985MHz
Channel:	207

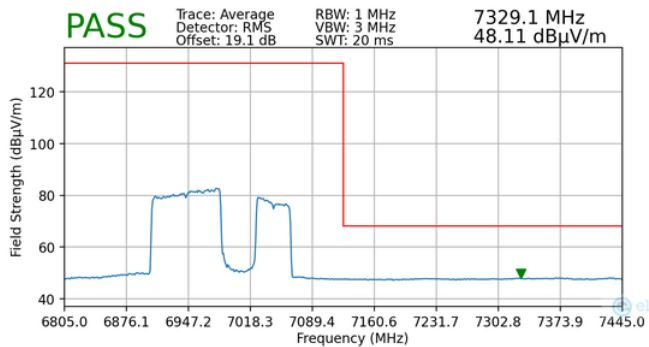

Plot 7-89. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8)

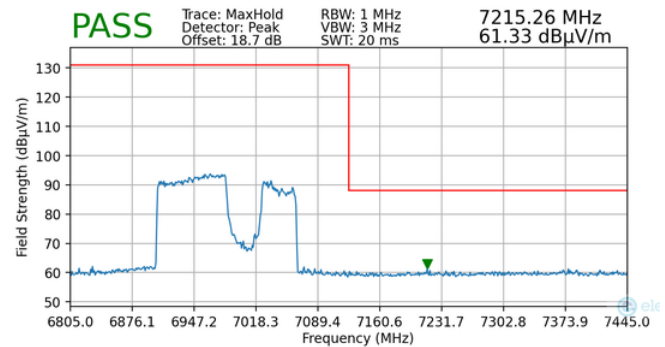


Plot 7-90. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8)


FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-07-R1.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 85 of 94

7.7.9 MIMO Radiated Band Edge Measurements (320MHz BW)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6105MHz
Channel:	31

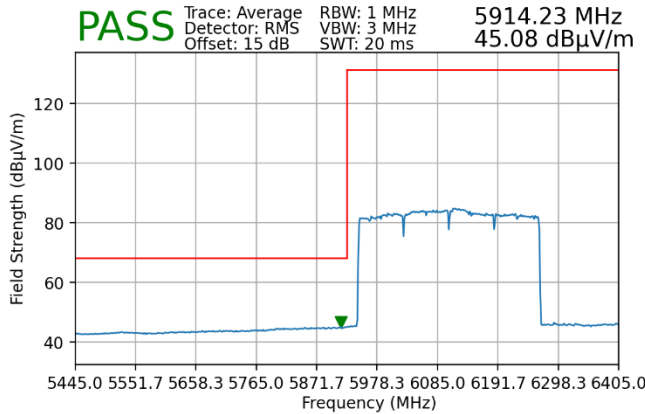


Plot 7-91. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5)

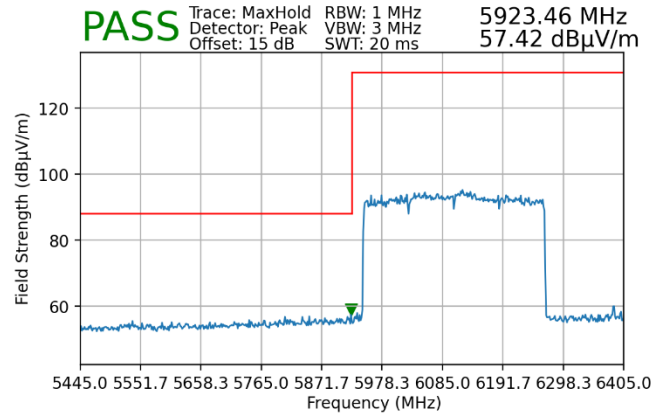


Plot 7-92. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6905MHz
Channel:	191

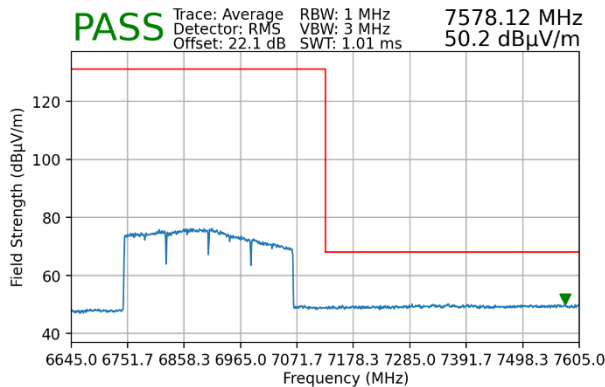

Plot 7-93. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8)

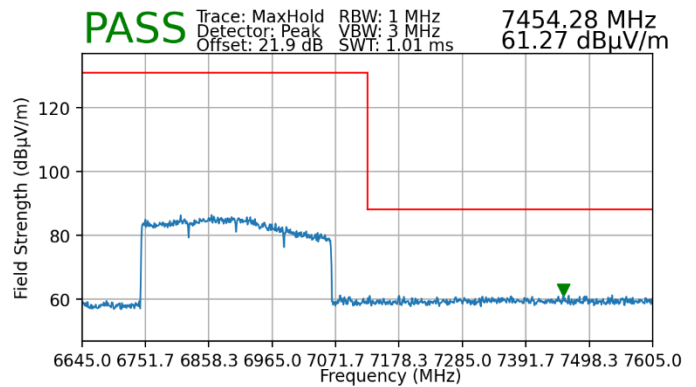


Plot 7-94. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8)


FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-07-R1.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 86 of 94

7.7.10 MIMO Radiated Band Edge Measurements (320MHz BW – Punctured)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6105MHz
Channel:	31

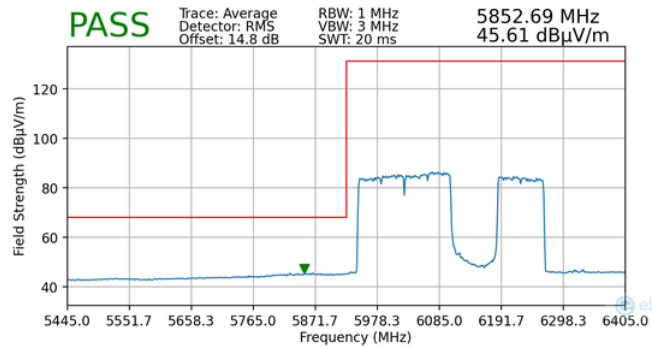


Plot 7-95. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5)

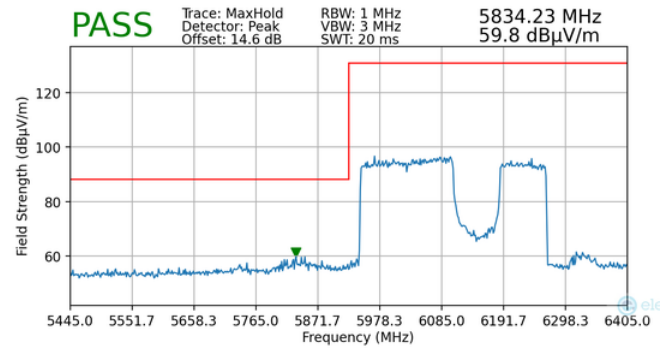


Plot 7-96. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6905MHz
Channel:	191

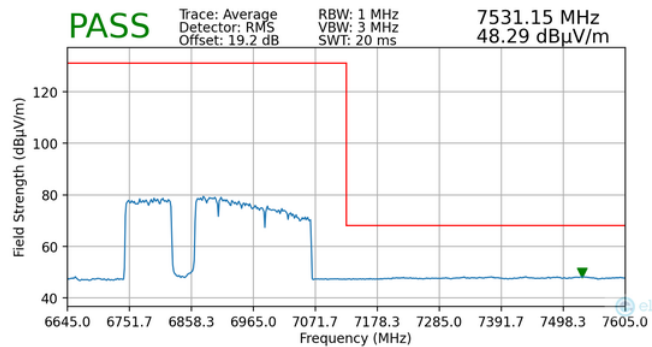

Plot 7-97. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8)

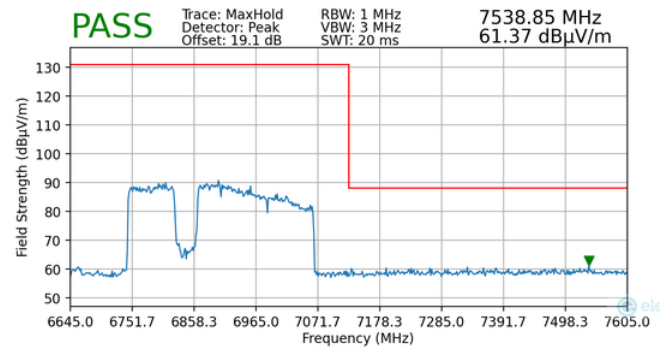

Plot 7-98. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-07-R1.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 87 of 94

7.8 Line Conducted Test Data

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst-case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207.

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-33. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10:2020, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest.
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize.

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest.
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize.

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-07-R1.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 88 of 94

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


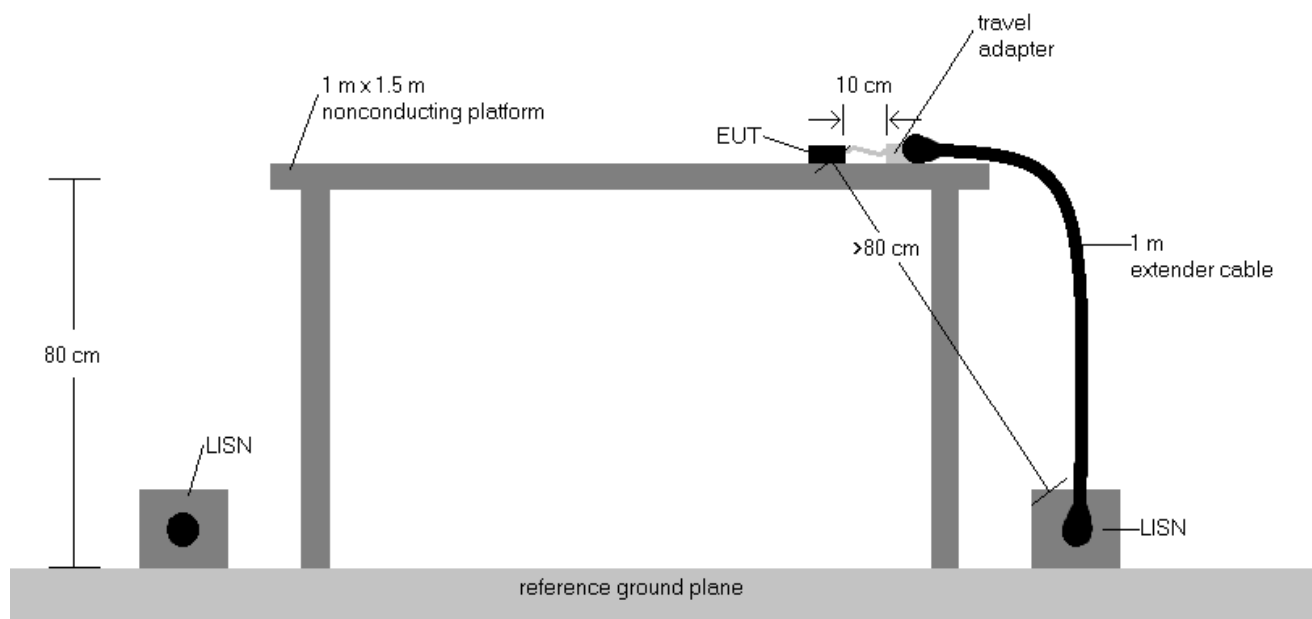


Figure 7-9. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated, and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz is specified in 15.207.
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-07-R1.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 89 of 94

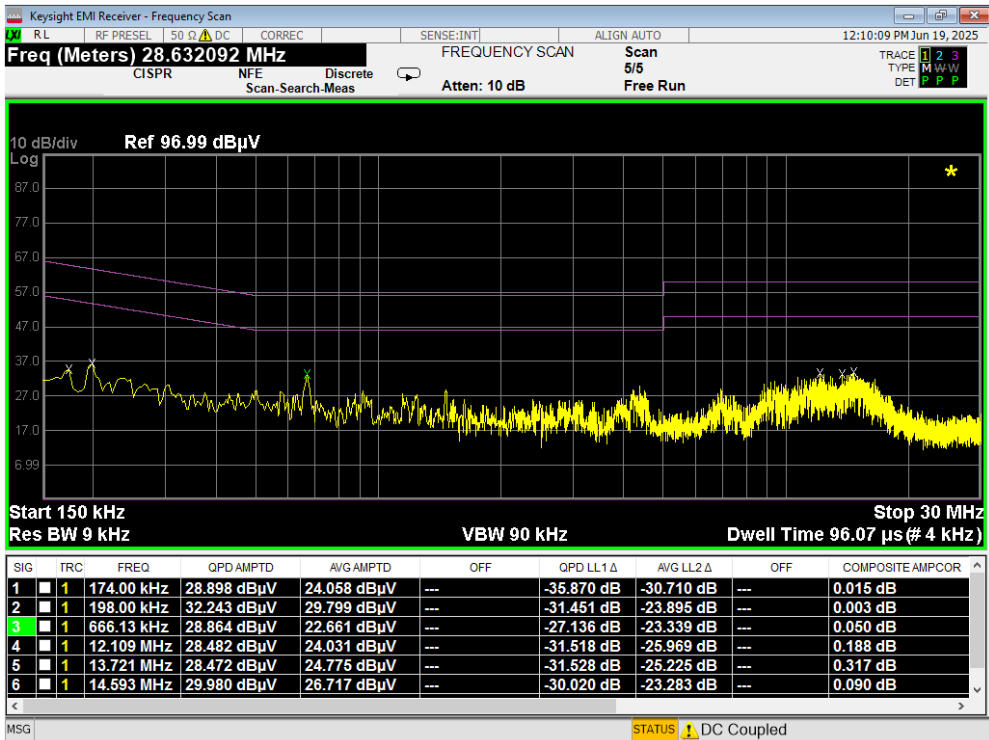


Plot 7-99. Line Conducted Plot with 802.11a UNII Band 5 (L1)

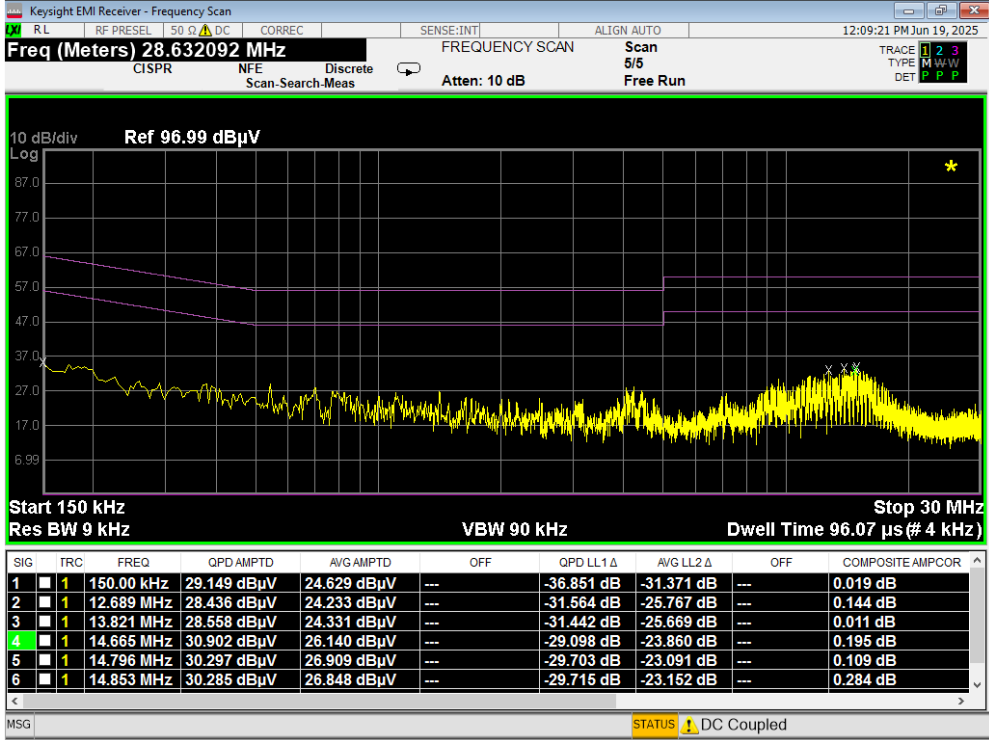


Plot 7-100. Line Conducted Plot with 802.11a UNII Band 5 (N)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-07-R1.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 90 of 94

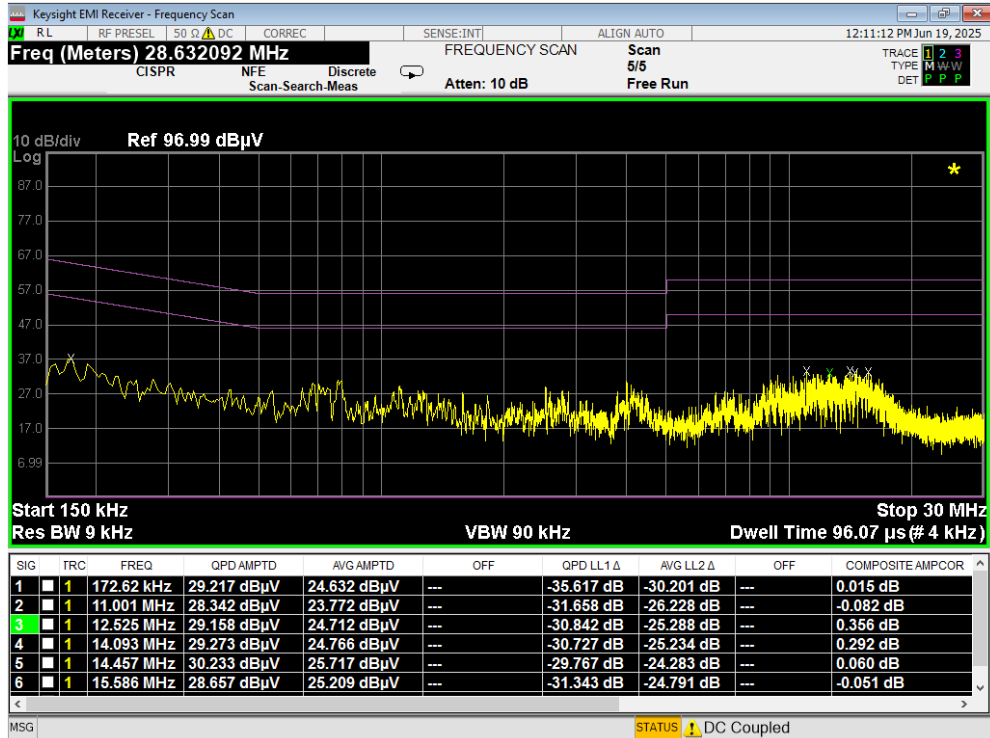


Plot 7-101. Line Conducted Plot with 802.11a UNII Band 6 (L1)

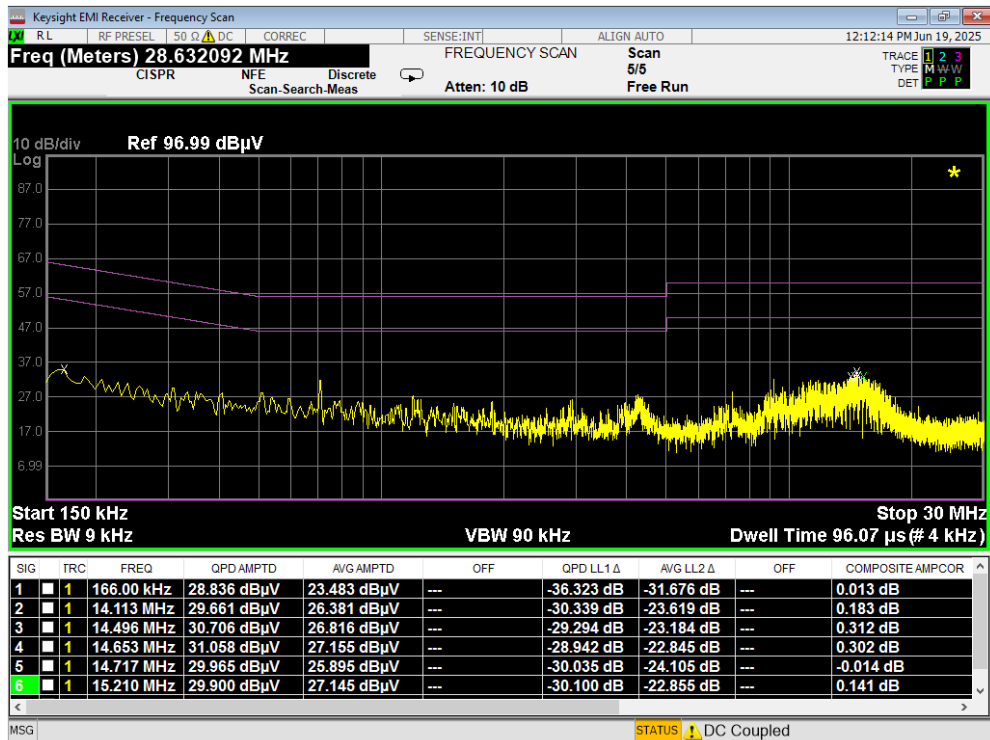


Plot 7-102. Line Conducted Plot with 802.11a UNII Band 6 (N)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-07-R1.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 91 of 94

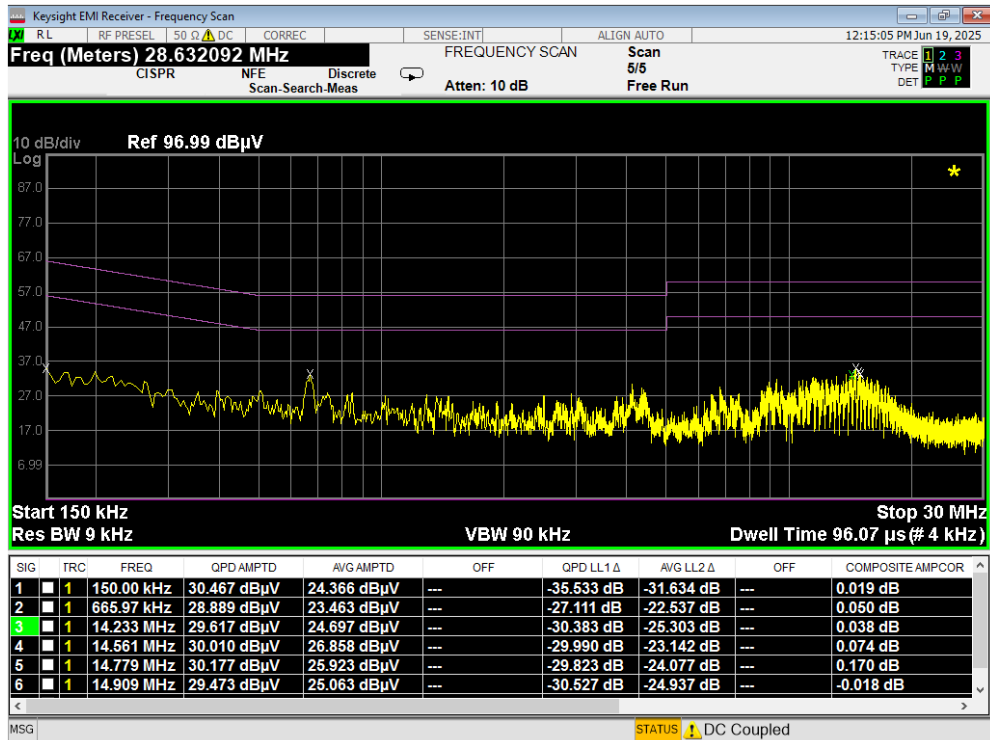


Plot 7-103. Line Conducted Plot with 802.11a UNII Band 7 (L1)

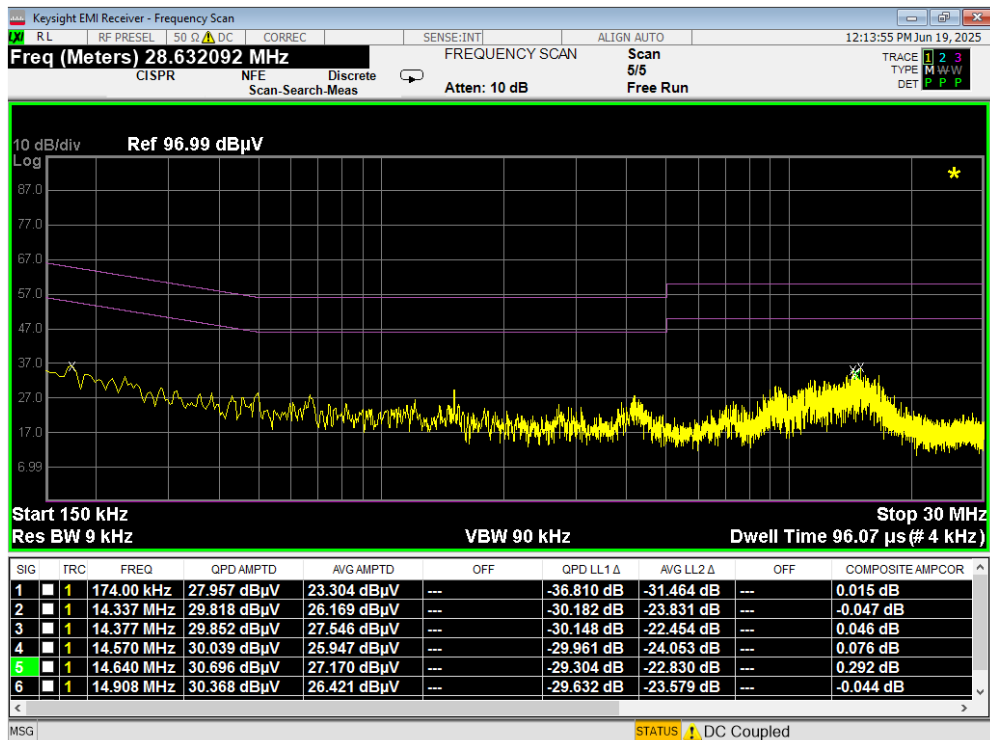


Plot 7-104. Line Conducted Plot with 802.11a UNII Band 7 (N)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-07-R1.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 92 of 94

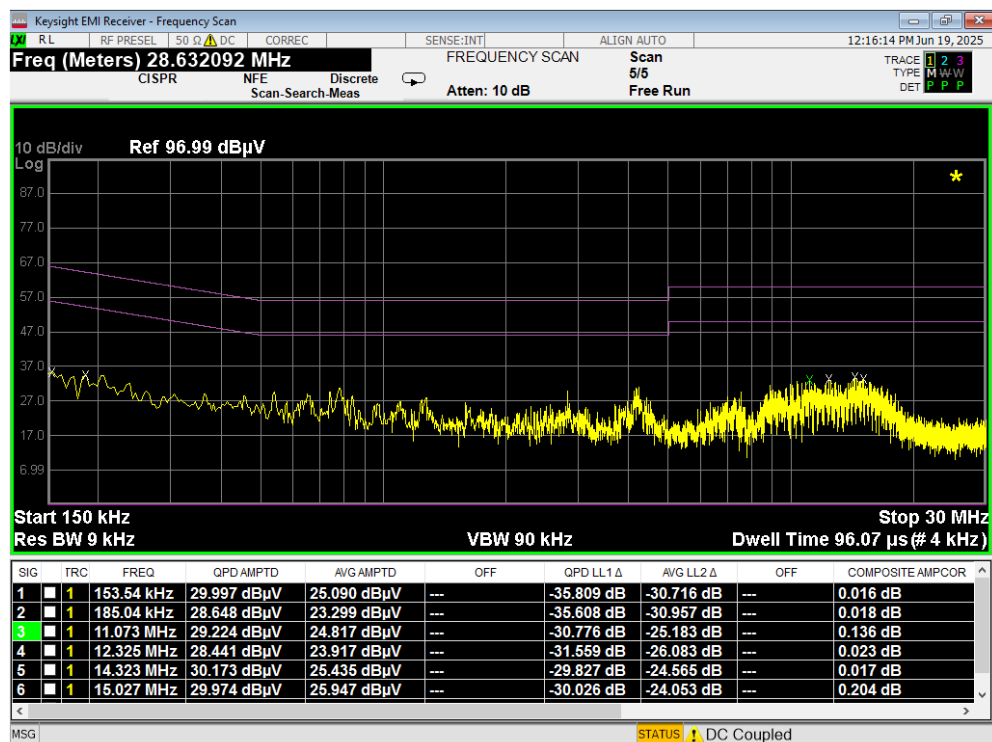

Plot 7-105. Line Conducted Plot with 802.11a UNII Band 8 (L1)

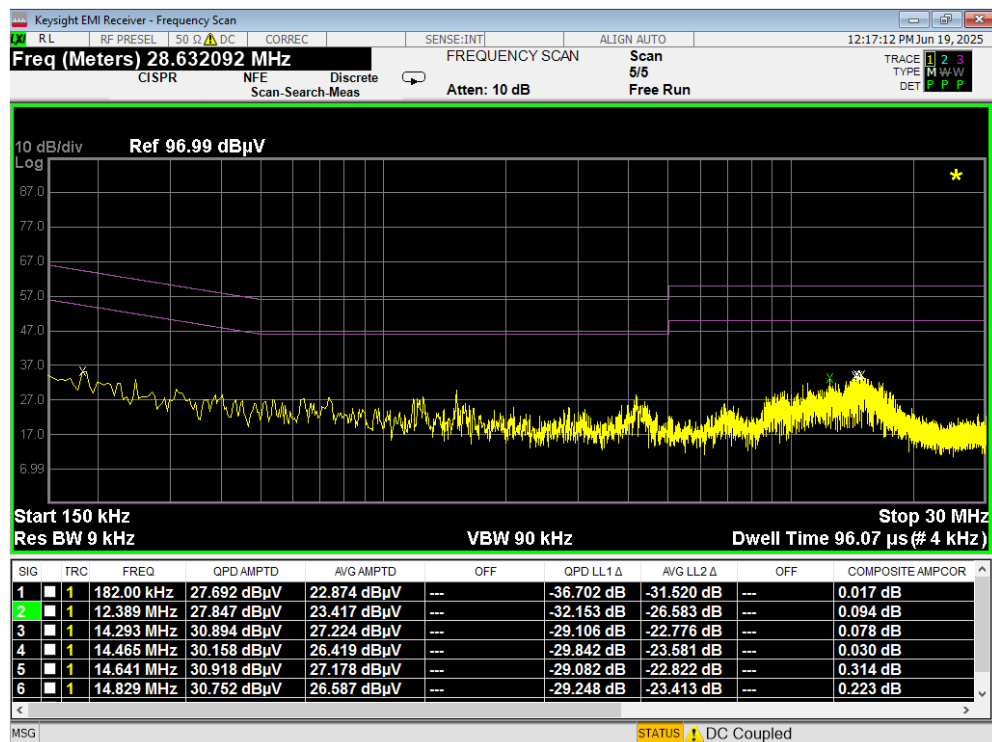

Plot 7-106. Line Conducted Plot with 802.11a UNII Band 8 (N)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-07-R1.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 93 of 94

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Tablet FCC ID: A3LSMX930, IC: 649E-SMX930** is in compliance with FCC Part Subpart E (15.407) of the FCC rules and RSS-248 of the ISSED Canada Rules for operation as a Dual Client Device.

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-07-R1.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 94 of 94