



7.6.2 MIMO Radiated Spurious Emission Measurements (26 Tones)

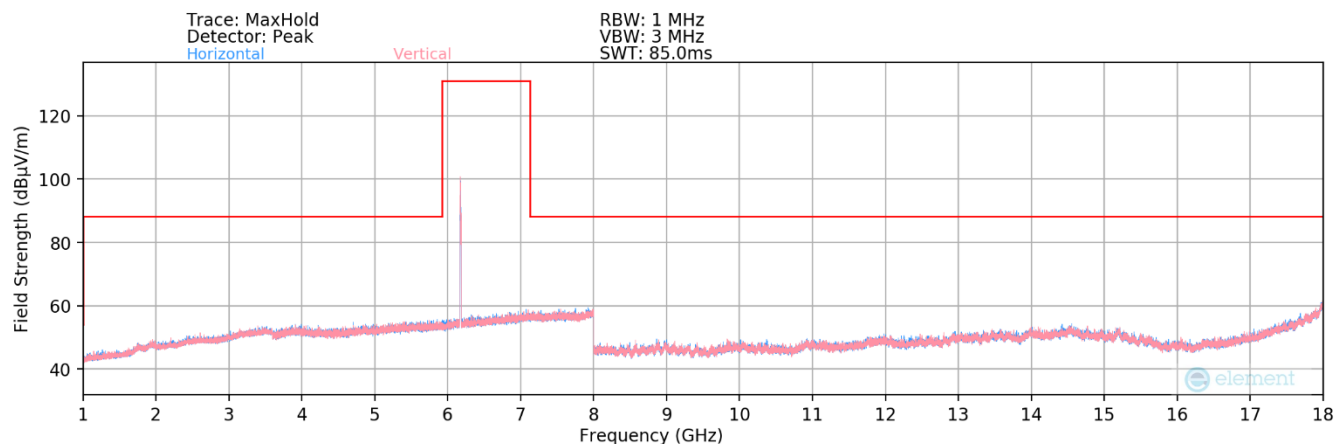


Plot 7-93. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11be – UNII Band 5 Ch. 45) – 52+26 Tones

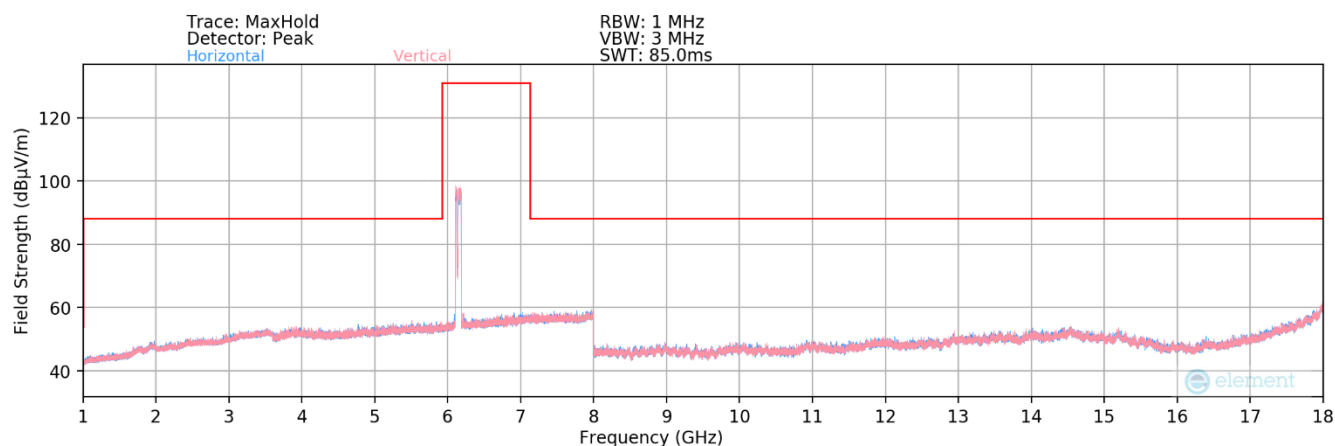


Plot 7-94. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11be – UNII Band 5 Ch. 39) – 484+242 Tones

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-08.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 101 of 116


7.6.3 MIMO Radiated Spurious Emission Measurements (242 Tones)

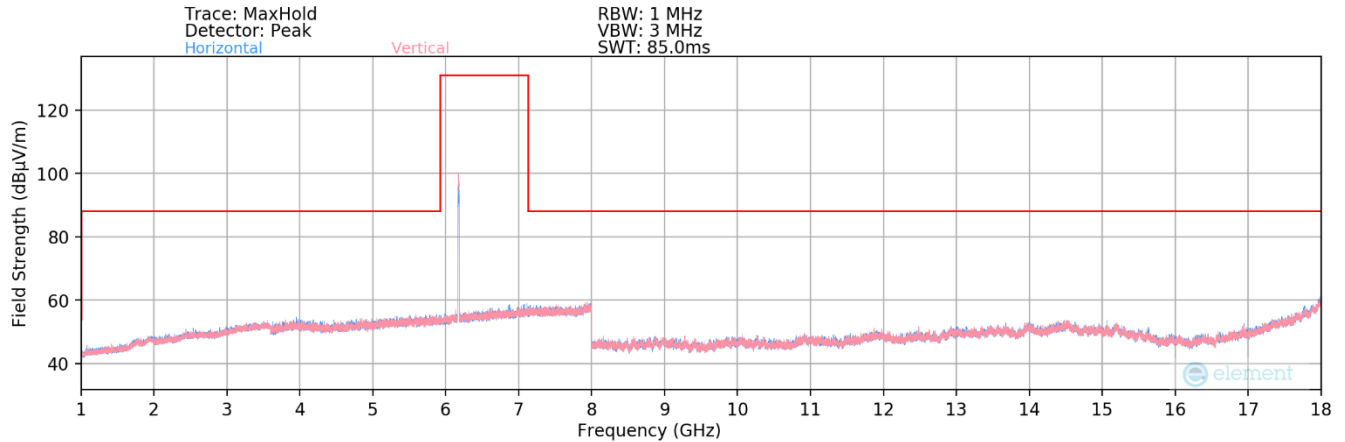

Plot 7-95. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 5 Ch. 45)

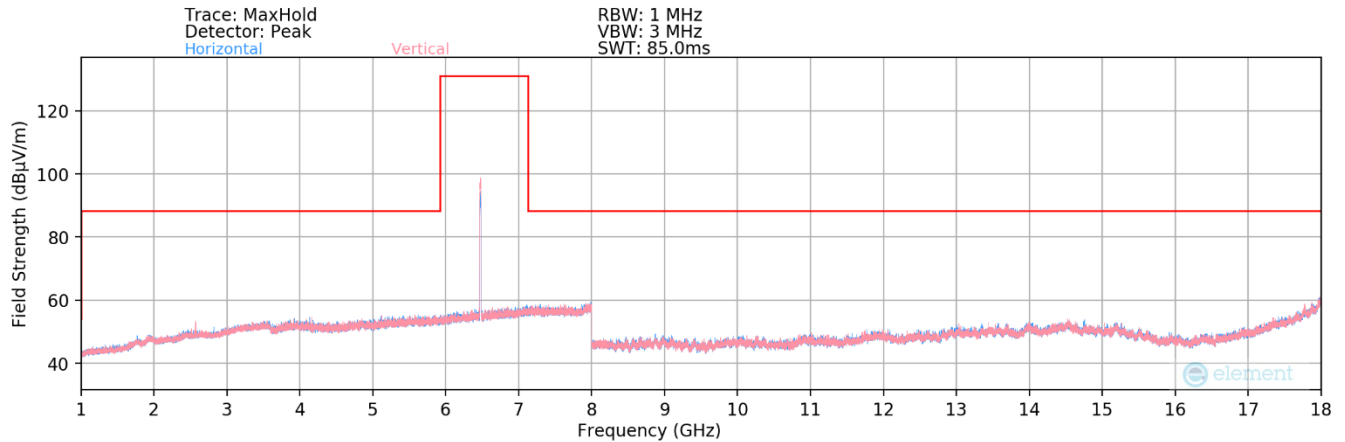


Plot 7-96. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 6 Ch. 105)

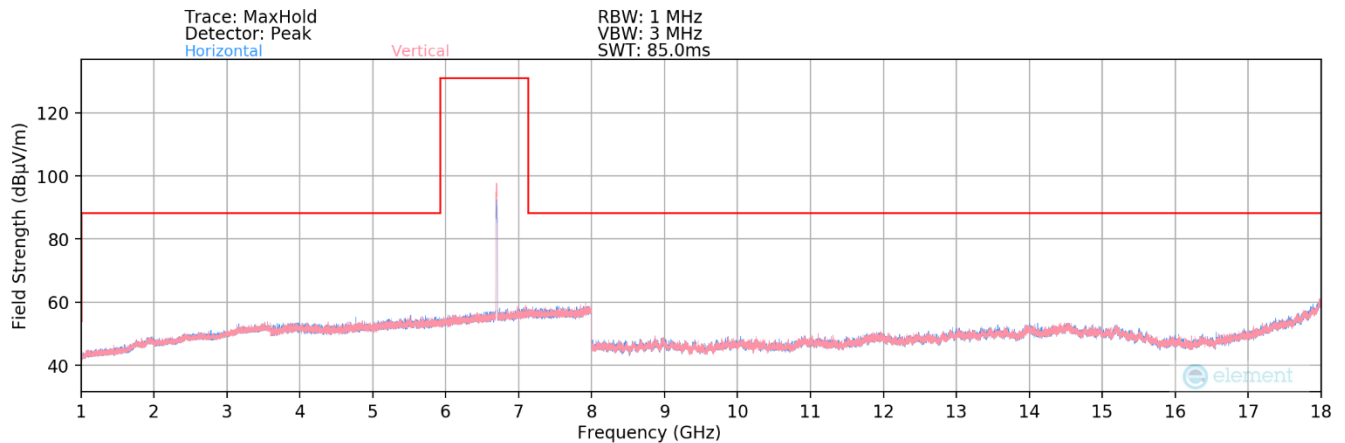


Plot 7-97. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 7 Ch. 149)


FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-08.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 102 of 116

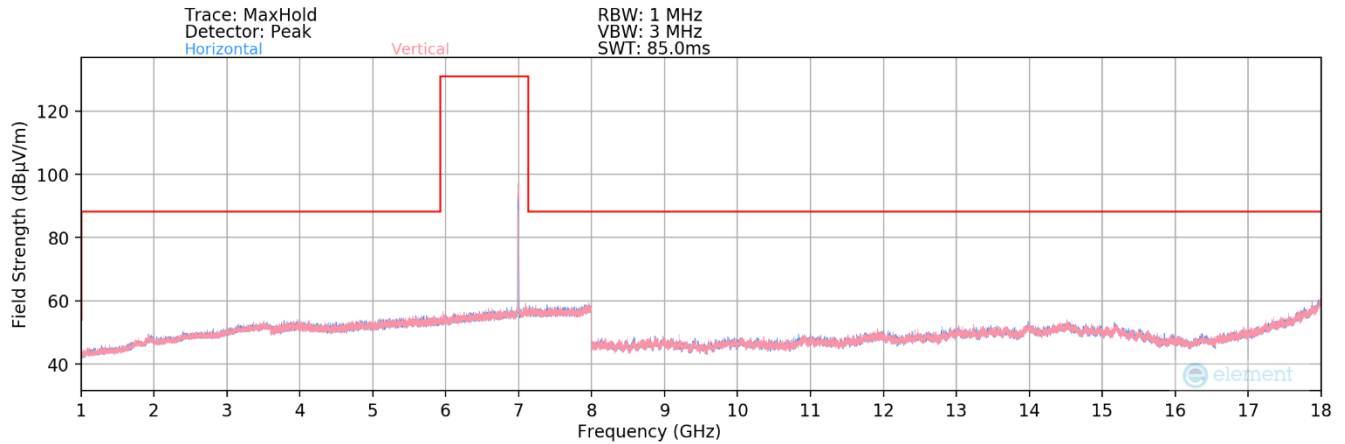

Plot 7-98. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – U Band 8 Ch. 209)

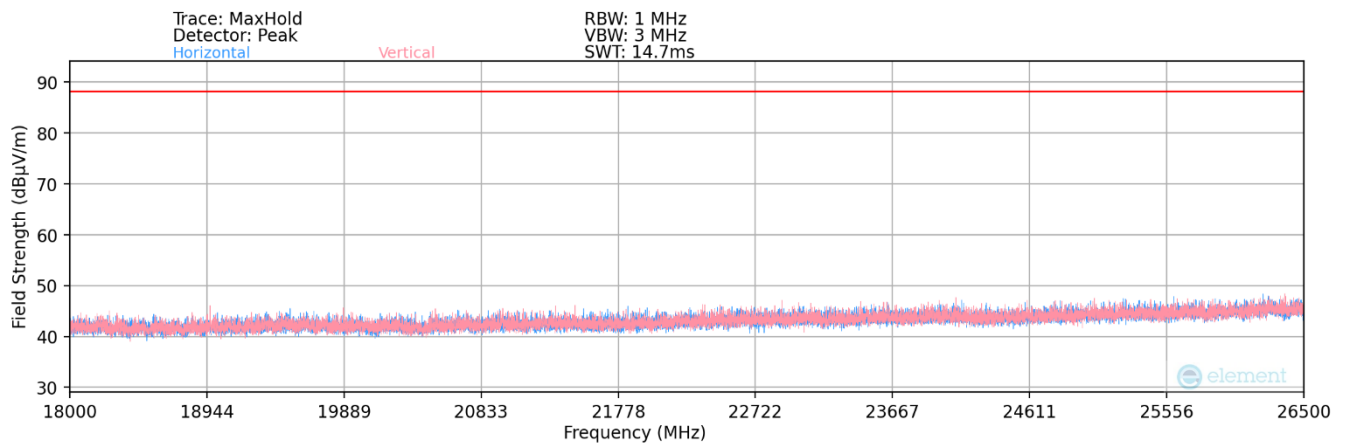

Plot 7-99. Radiated Spurious Plot 18GHz - 26.5GHz (802.11ax) – Ch.149

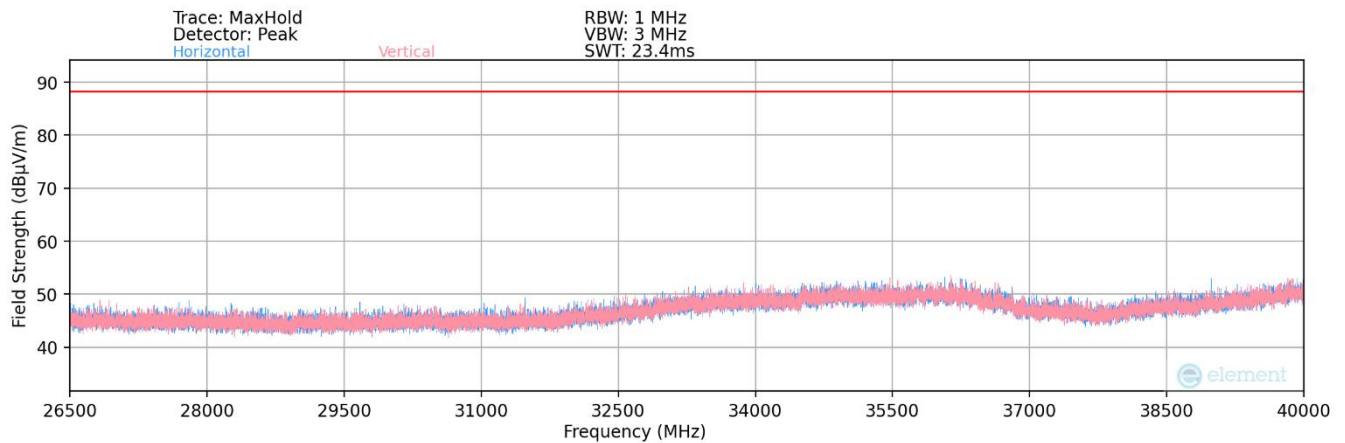

Plot 7-100. Radiated Spurious Plot 26.5GHz - 40GHz (802.11ax) – Ch.149

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-08.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 103 of 116

7.6.3.1 MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII Band 5

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
802.11be RU 242T	MIMO	5	2	5935	61	*	11870.00	Average	H	291	271	-77.17	9.86	0.00	39.69	53.98	-14.29
						*	11870.00	Peak	H	291	271	-65.60	9.86	0.00	51.26	73.98	-22.72
						*	17805.00	Average	H	-	-	-77.61	17.15	0.00	46.54	53.98	-7.44
						*	17805.00	Peak	H	-	-	-65.82	17.15	0.00	58.33	73.98	-15.65
						*	23740.00	Average	H	-	-	-62.08	4.02	-9.54	39.40	53.98	-14.58
						*	23740.00	Peak	H	-	-	-54.82	4.02	-9.54	46.66	73.98	-27.32
			45	6175	61		29675.00	Peak	H	-	-	-54.76	5.01	-9.54	47.71	68.20	-20.49
						*	12350.00	Average	H	-	-	-77.76	9.79	0.00	39.03	53.98	-14.95
						*	12350.00	Peak	H	-	-	-65.28	9.79	0.00	51.51	73.98	-22.47
						*	18525.00	Average	H	-	-	-60.95	1.00	-9.54	37.50	53.98	-16.48
						*	18525.00	Peak	H	-	-	-53.09	1.00	-9.54	45.37	73.98	-28.61
							24700.00	Peak	H	-	-	-54.45	4.23	-9.54	47.24	68.20	-20.96
			93	6415	61		30875.00	Peak	H	-	-	-55.25	5.66	-9.54	47.87	68.20	-20.33
							12830.00	Peak	H	376	184	-65.04	10.56	0.00	52.52	68.20	-15.68
						*	19245.00	Average	H	-	-	-60.57	1.74	-9.54	38.63	53.98	-15.35
						*	19245.00	Peak	H	-	-	-54.12	1.74	-9.54	45.07	73.98	-28.91
							25660.00	Peak	H	-	-	-54.65	4.69	-9.54	47.50	68.20	-20.70
							32075.00	Peak	H	-	-	-55.04	6.47	-9.54	48.89	68.20	-19.31

Table 7-31. Radiated Measurements MIMO (242 Tones)

7.6.3.2 MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII Band 6

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
802.11be RU 242T	MIMO	6	97	6435	61		12870.00	Peak	H	375	160	-66.06	10.44	0.00	51.38	68.20	-16.82
						*	19305.00	Average	H	-	-	-60.69	1.65	-9.54	38.42	53.98	-15.56
						*	19305.00	Peak	H	-	-	-53.39	1.65	-9.54	45.72	73.98	-28.26
							25740.00	Peak	H	-	-	-54.64	4.71	-9.54	47.53	68.20	-20.67
							32175.00	Peak	H	-	-	-55.08	6.76	-9.54	49.14	68.20	-19.06
			105	6475	61		12950.00	Peak	H	389	162	-65.49	10.78	0.00	52.29	68.20	-15.91
						*	19425.00	Average	H	-	-	-61.23	1.76	-9.54	37.99	53.98	-15.98
						*	19425.00	Peak	H	-	-	-54.72	1.76	-9.54	44.50	73.98	-29.48
							25900.00	Peak	H	-	-	-53.91	4.78	-9.54	48.34	68.20	-19.86
							32375.00	Peak	H	-	-	-54.61	6.56	-9.54	49.41	68.20	-18.79
			113	6515	61		13030.00	Peak	H	180	106	-65.03	10.87	0.00	52.84	68.20	-15.36
						*	19545.00	Average	H	-	-	-61.09	1.89	-9.54	38.26	53.98	-15.72
						*	19545.00	Peak	H	-	-	-54.18	1.89	-9.54	45.17	73.98	-28.81
							26060.00	Peak	H	-	-	-55.24	4.92	-9.54	47.15	68.20	-21.05
							32575.00	Peak	H	-	-	-54.69	6.76	-9.54	49.53	68.20	-18.67

Table 7-32. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-08.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 104 of 116

7.6.3.3 MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII Band 7

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11be RU 242T	MIMO	7	117	6535	61		13070.00	Peak	H	180	200	-65.16	10.96	0.00	52.80	68.20	-15.40
						*	19605.00	Average	H	-	-	-60.77	2.20	-9.54	38.89	53.98	-15.09
						*	19605.00	Peak	H	-	-	-53.58	2.20	-9.54	46.08	73.98	-27.90
							26140.00	Peak	H	-	-	-54.96	4.98	-9.54	47.48	68.20	-20.72
							32675.00	Peak	H	-	-	-54.62	7.14	-9.54	49.98	68.20	-18.22
			149	6695	61	*	13390.00	Average	H	164	179	-76.23	11.06	0.00	41.83	53.98	-12.15
						*	13390.00	Peak	H	164	179	-65.34	11.06	0.00	52.72	73.98	-21.26
						*	20085.00	Average	H	-	-	-61.78	2.07	-9.54	37.75	53.98	-16.23
						*	20085.00	Peak	H	-	-	-54.46	2.07	-9.54	45.07	73.98	-28.91
							26780.00	Peak	H	-	-	-54.69	5.18	-9.54	47.95	68.20	-20.25
			185	6875	61		33475.00	Peak	H	-	-	-54.96	8.48	-9.54	50.98	68.20	-17.22
							13750.00	Peak	H	144	197	-64.96	11.75	0.00	53.79	68.20	-14.41
						*	20625.00	Average	H	-	-	-61.51	2.36	-9.54	38.30	53.98	-15.68
						*	20625.00	Peak	H	-	-	-54.47	2.36	-9.54	45.35	73.98	-28.63
							27500.00	Peak	H	-	-	-54.99	5.00	-9.54	47.47	68.20	-20.73
							34375.00	Peak	H	-	-	-55.03	9.46	-9.54	51.89	68.20	-16.31

Table 7-33. Radiated Measurements MIMO (242 Tones)

7.6.3.4 MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII Band 8


Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11be RU 242T	MIMO	8	189	6895	61		13790.00	Peak	H	140	160	-64.89	11.61	0.00	53.72	68.20	-14.48
						*	20685.00	Average	H	-	-	-61.64	2.33	-9.54	38.16	53.98	-15.82
						*	20685.00	Peak	H	-	-	-55.09	2.33	-9.54	44.71	73.98	-29.27
							27580.00	Peak	H	-	-	-54.43	5.33	-9.54	48.37	68.20	-19.83
							34475.00	Peak	H	-	-	-55.24	9.33	-9.54	51.55	68.20	-16.65
			209	6995	61		13990.00	Peak	H	255	101	-58.28	11.81	0.00	60.53	68.20	-7.67
						*	20985.00	Average	H	-	-	-61.95	2.83	-9.54	38.34	53.98	-15.64
						*	20985.00	Peak	H	-	-	-55.11	2.83	-9.54	45.18	73.98	-28.80
							27980.00	Peak	H	-	-	-54.08	5.30	-9.54	48.67	68.20	-19.53
							34975.00	Peak	H	-	-	-53.58	9.79	-9.54	53.67	68.20	-14.53
			233	7115	61		14230.00	Peak	H	220	104	-58.73	12.55	0.00	60.82	68.20	-7.38
						*	21345.00	Average	H	-	-	-61.93	2.85	-9.54	38.38	53.98	-15.60
						*	21345.00	Peak	H	-	-	-54.37	2.85	-9.54	45.93	73.98	-28.05
							28460.00	Peak	H	-	-	-54.82	5.34	-9.54	47.98	68.20	-20.22
							35575.00	Peak	H	-	-	-55.18	9.53	-9.54	51.81	68.20	-16.39

Table 7-34. Radiated Measurements MIMO (242 Tones)


FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-08.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 105 of 116

7.6.4 MIMO Radiated Band Edge Measurements (20MHz BW – Partial Tone – 106T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	53
Distance of Measurements:	3 Meters
Operating Frequency:	5935MHz
Channel:	2

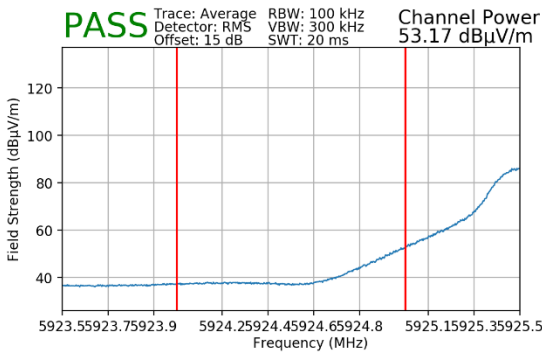


Plot 7-101. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 106T)

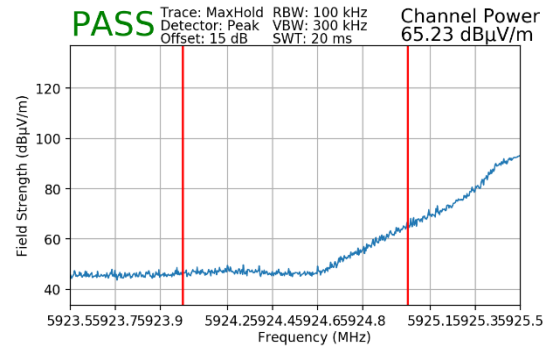


Plot 7-102. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 106T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	54
Distance of Measurements:	3 Meters
Operating Frequency:	7115MHz
Channel:	233

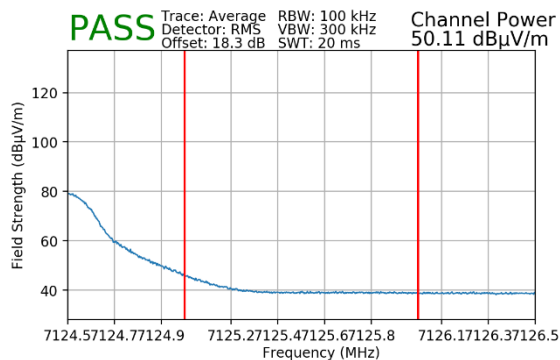

Plot 7-103. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 106T)

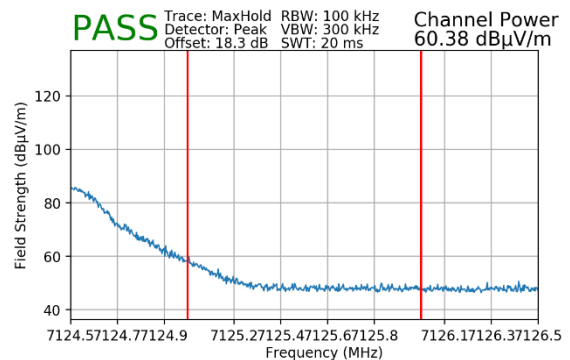


Plot 7-104. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 106T)


FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-08.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 106 of 116

7.6.5 MIMO Radiated Band Edge Measurements (20MHz BW – MRU – 106+26T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	82
Distance of Measurements:	3 Meters
Operating Frequency:	5935MHz
Channel:	2

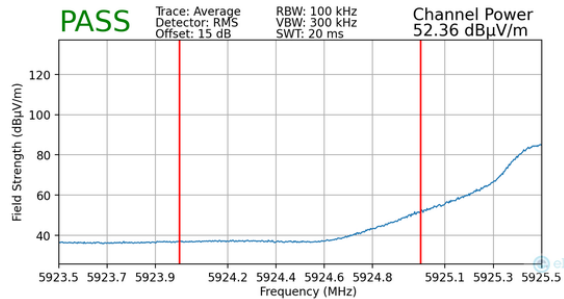


Plot 7-105. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 106+26T)

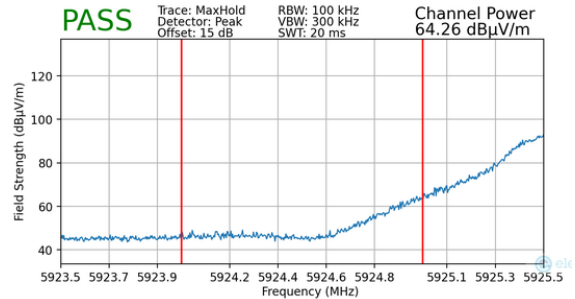


Plot 7-106. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 106+26T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	83
Distance of Measurements:	3 Meters
Operating Frequency:	7115MHz
Channel:	233

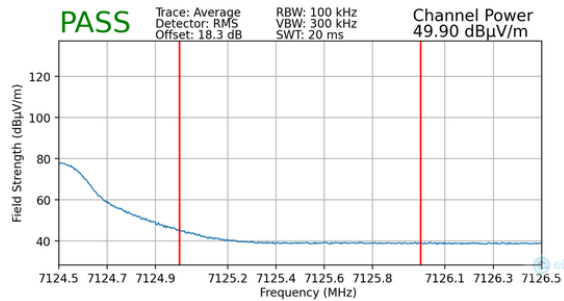

Plot 7-107. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 106+26T)

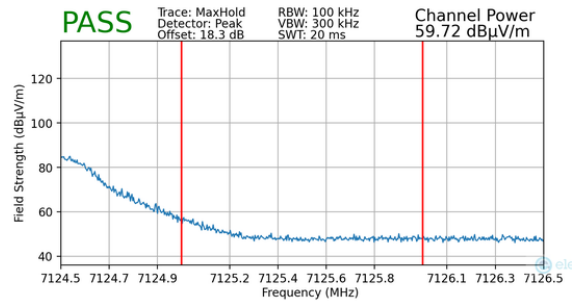


Plot 7-108. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 106+26T)


FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-08.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 107 of 116

7.6.6 MIMO Radiated Band Edge Measurements (20MHz BW – Full Tone – 242T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	61
Distance of Measurements:	3 Meters
Operating Frequency:	5935MHz
Channel:	2

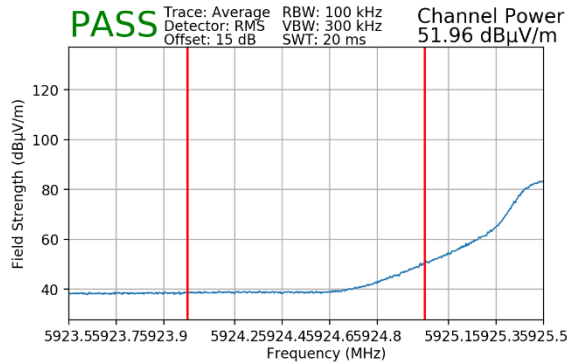


Plot 7-109. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 242T)

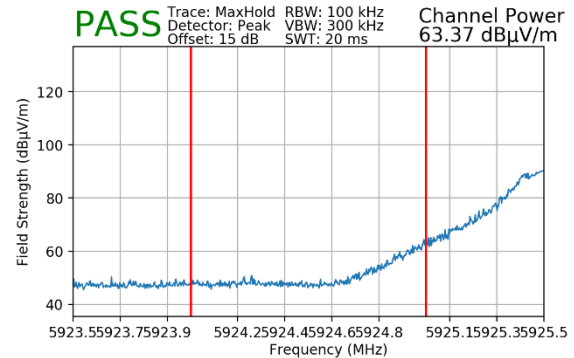


Plot 7-110. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 242T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	61
Distance of Measurements:	3 Meters
Operating Frequency:	7115MHz
Channel:	233

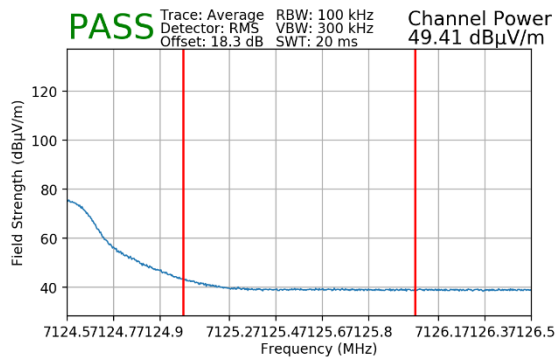

Plot 7-111. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 242T)

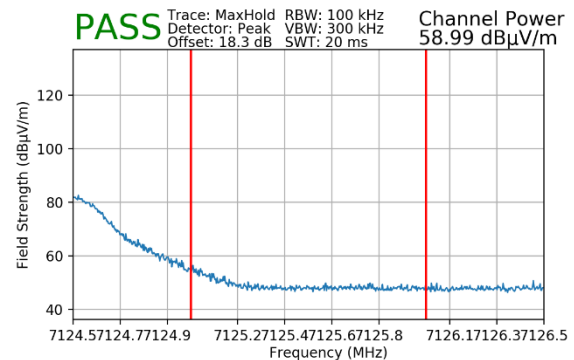


Plot 7-112. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 242T)


FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-08.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 108 of 116

7.6.7 MIMO Radiated Band Edge Measurements (40MHz BW – Full Tone – 484T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	65
Distance of Measurements:	3 Meters
Operating Frequency:	5965MHz
Channel:	3

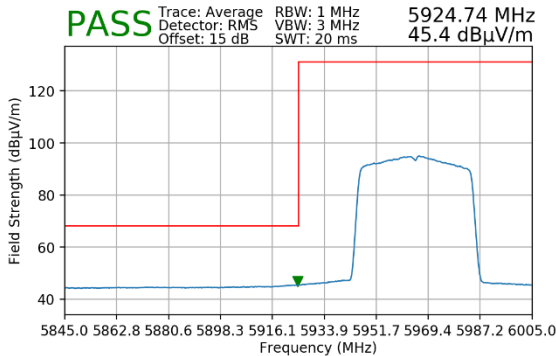


Plot 7-113. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 484T)

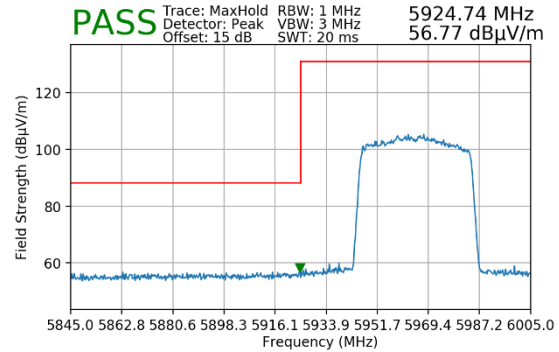


Plot 7-114. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 484T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	65
Distance of Measurements:	3 Meters
Operating Frequency:	7085MHz
Channel:	227

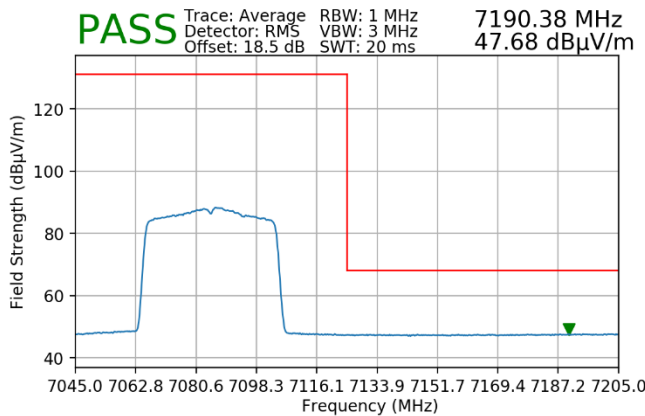

Plot 7-115. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 484T)

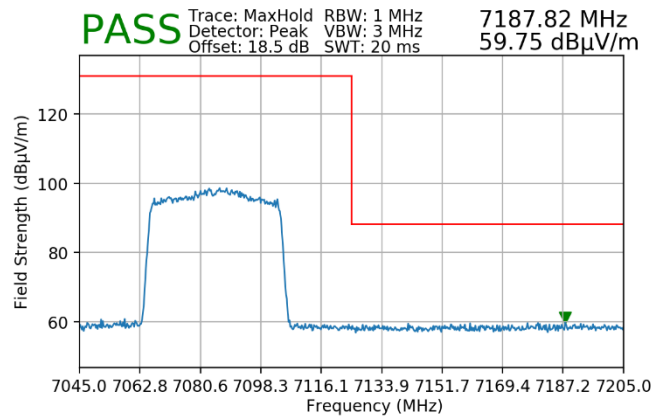


Plot 7-116. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 484T)


FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-08.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 109 of 116

7.6.8 MIMO Radiated Band Edge Measurements (80MHz BW – Full Tone – 996T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	67
Distance of Measurements:	3 Meters
Operating Frequency:	5985MHz
Channel:	7

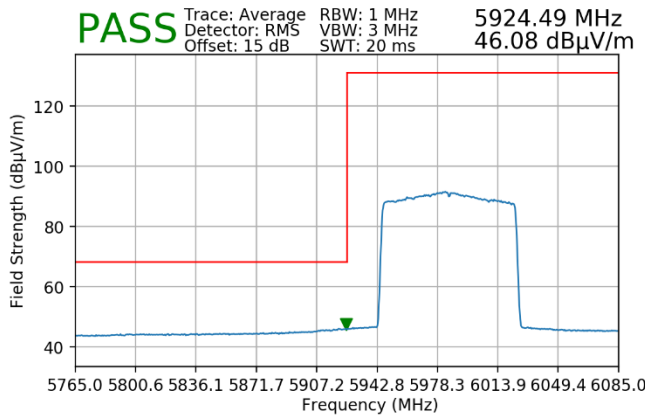


Plot 7-117. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 996T)

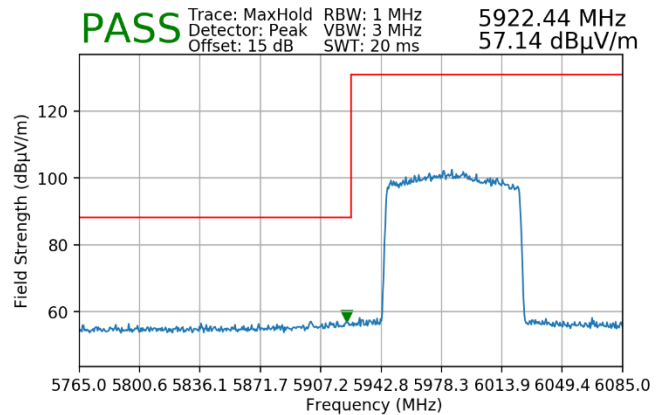


Plot 7-118. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 996T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	67
Distance of Measurements:	3 Meters
Operating Frequency:	7025MHz
Channel:	215

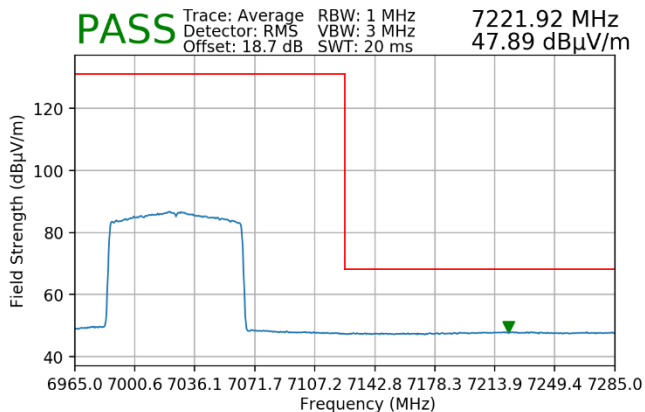

Plot 7-119. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 996T)

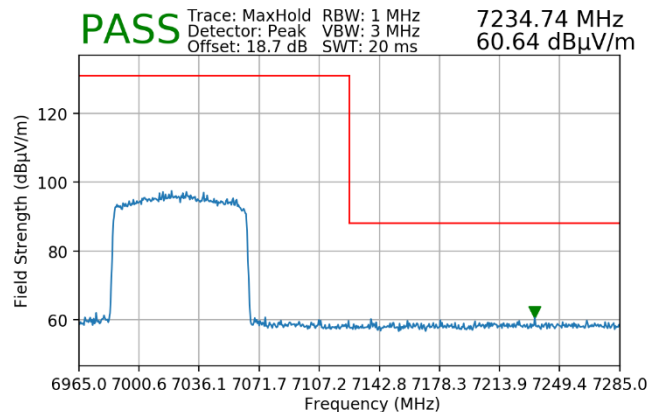


Plot 7-120. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 996T)


FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-08.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 110 of 116

7.6.9 MIMO Radiated Band Edge Measurements (80MHz BW – MRU – 484+242T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	90
Distance of Measurements:	3 Meters
Operating Frequency:	5985MHz
Channel:	7

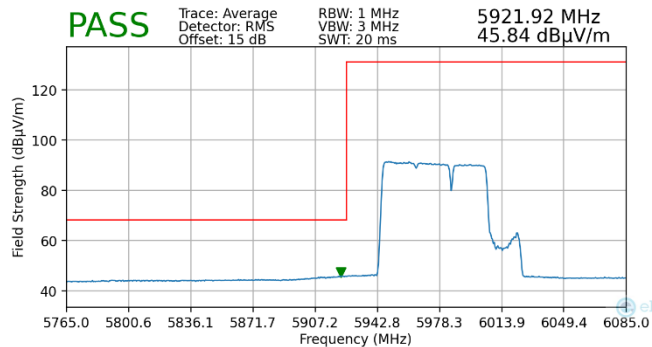


Plot 7-121. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 484+242T)

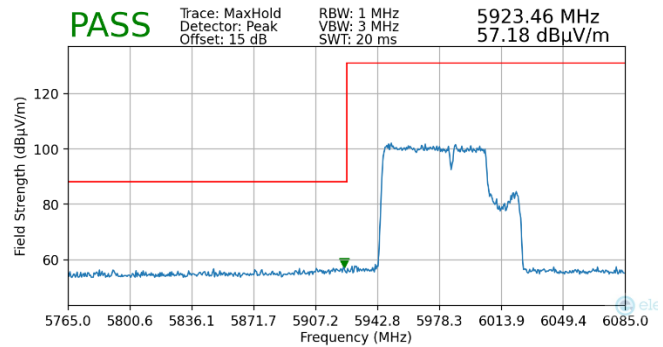


Plot 7-122. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 484+242T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	93
Distance of Measurements:	3 Meters
Operating Frequency:	7025MHz
Channel:	215

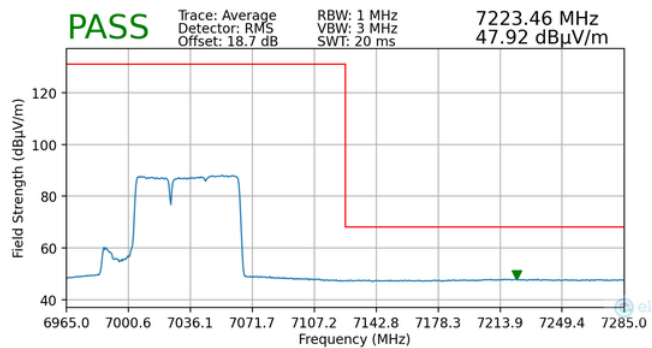

Plot 7-123. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 484+242T)

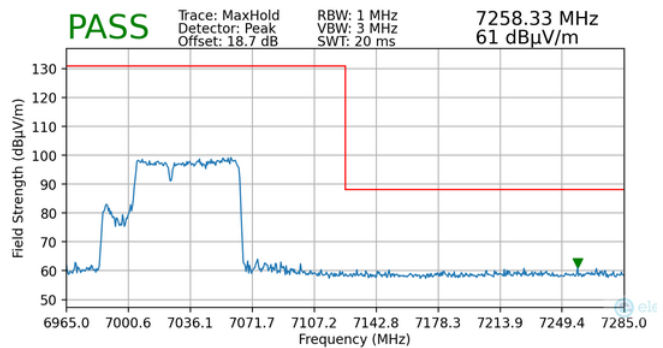


Plot 7-124. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 484+242T)


FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-08.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 111 of 116

7.6.10 MIMO Radiated Band Edge Measurements (160MHz BW – Full Tone – 2x996T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	68
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

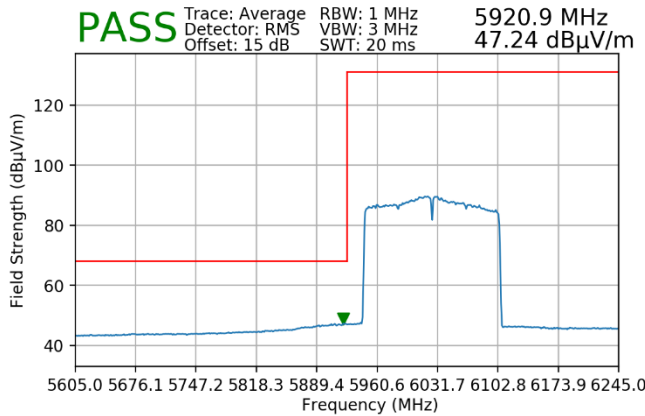


Plot 7-125. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 2x996T)

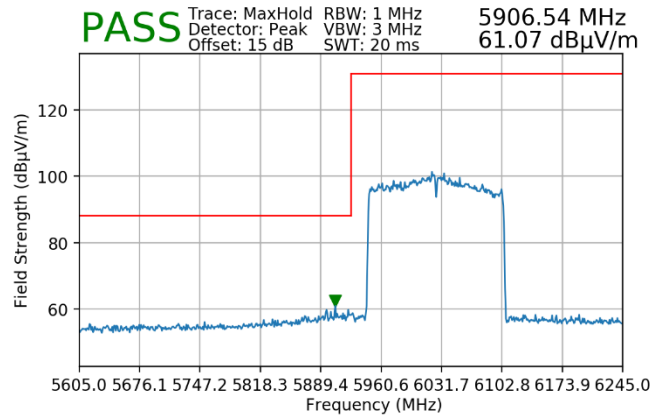


Plot 7-126. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 2x996T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	68
Distance of Measurements:	3 Meters
Operating Frequency:	6985MHz
Channel:	207

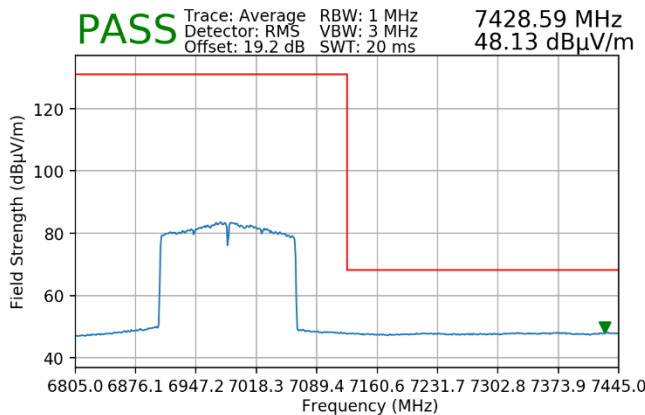

Plot 7-127. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 2x996T)

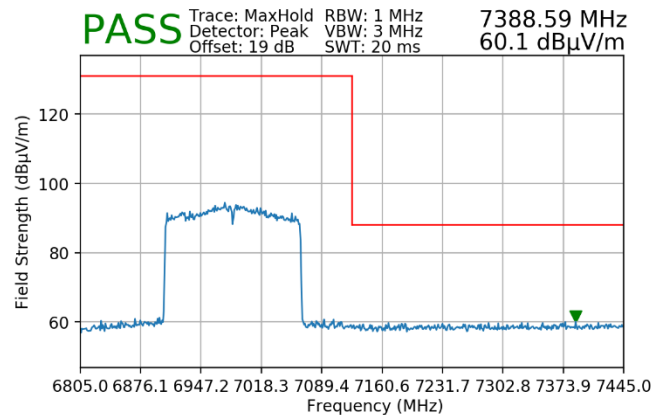


Plot 7-128. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 2x996T)


FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-08.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 112 of 116

7.6.11 MIMO Radiated Band Edge Measurements (160MHz BW – MRU – 996+484T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	1094
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

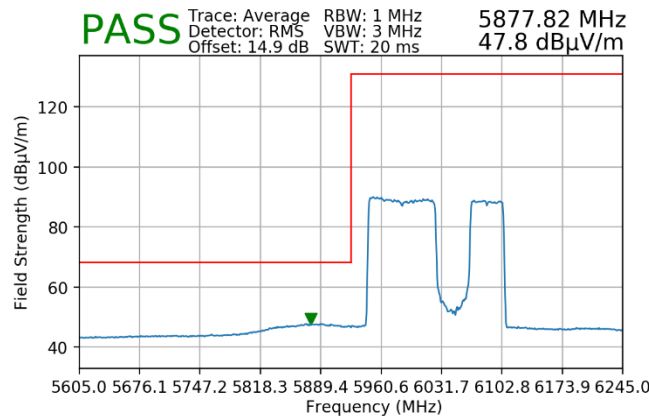


Plot 7-129. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 996+484T)

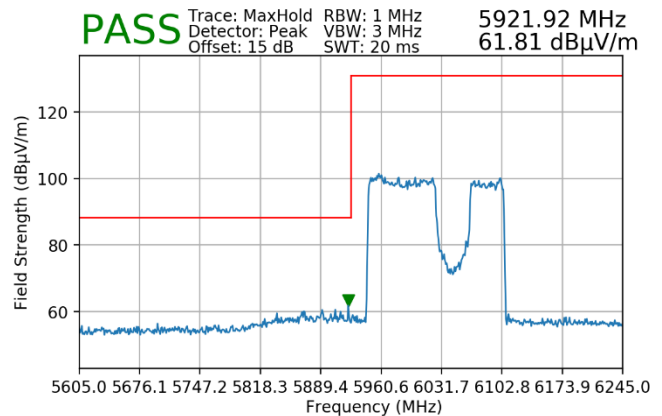


Plot 7-130. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 996+484T)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
RU Index	95
Distance of Measurements:	3 Meters
Operating Frequency:	6985MHz
Channel:	207

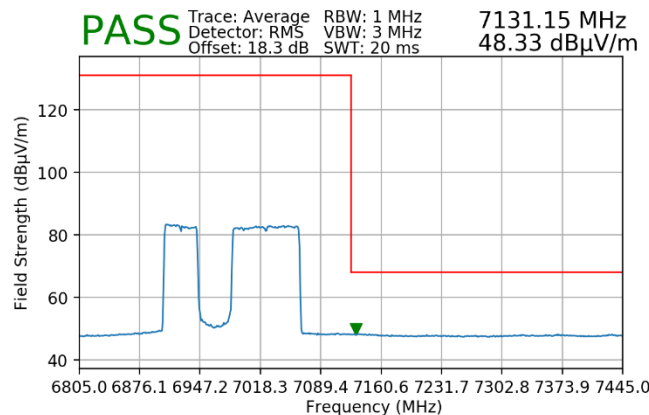

Plot 7-131. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 996+484T)

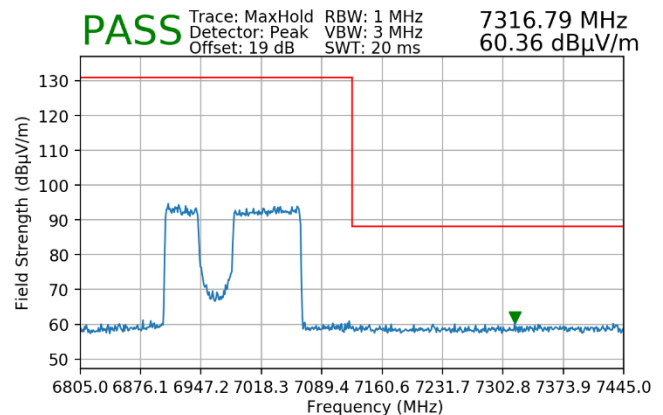


Plot 7-132. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 996+484T)


FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-08.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 113 of 116

7.6.12 MIMO Radiated Band Edge Measurements (320MHz BW – Full Tone – 4*996T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index	69
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

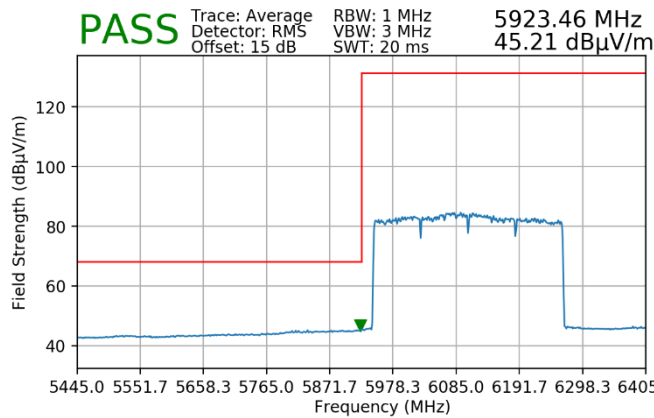


Plot 7-133. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 4*996T)

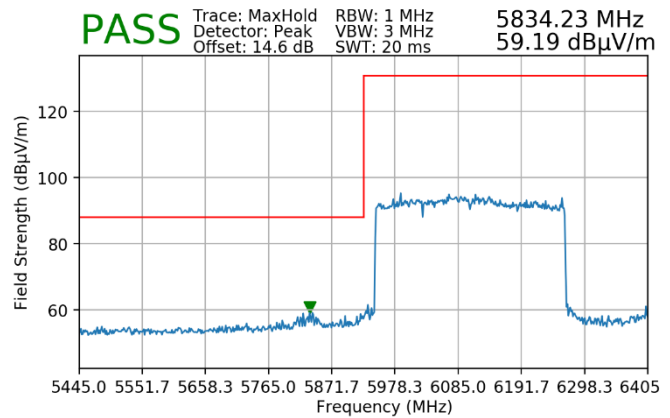


Plot 7-134. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 4*996T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index	69
Distance of Measurements:	3 Meters
Operating Frequency:	6985MHz
Channel:	207

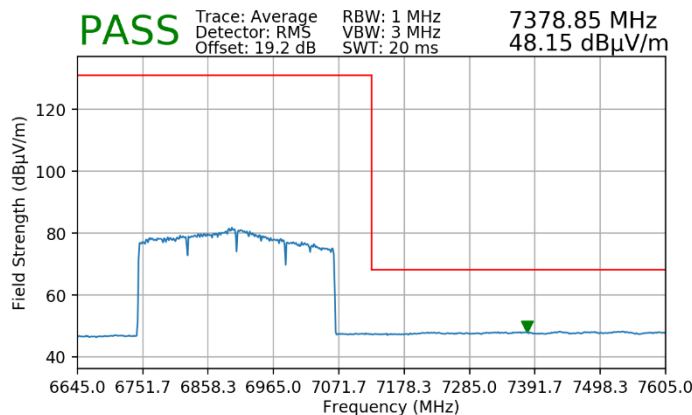

Plot 7-135. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 4*996T)

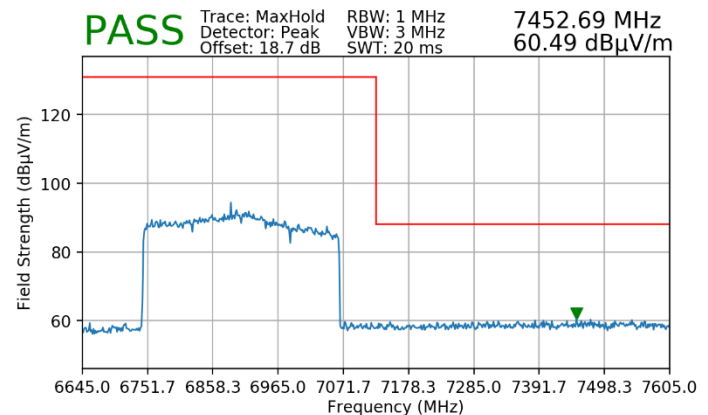


Plot 7-136. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 4*996T)


FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-08.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 114 of 116

7.6.13 MIMO Radiated Band Edge Measurements (320MHz BW – MRU – 3*996+484T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index	10105
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

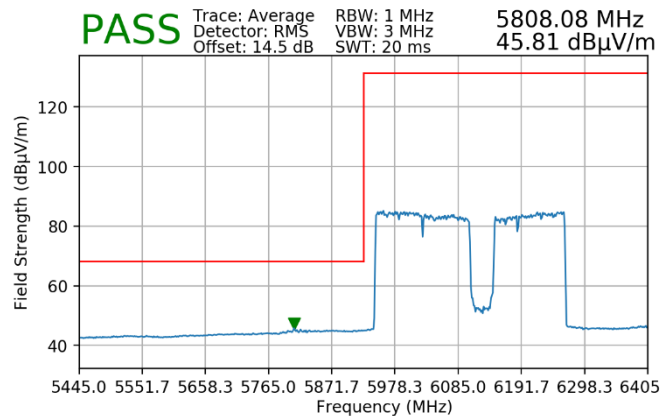


Plot 7-137. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 3*996+484T)

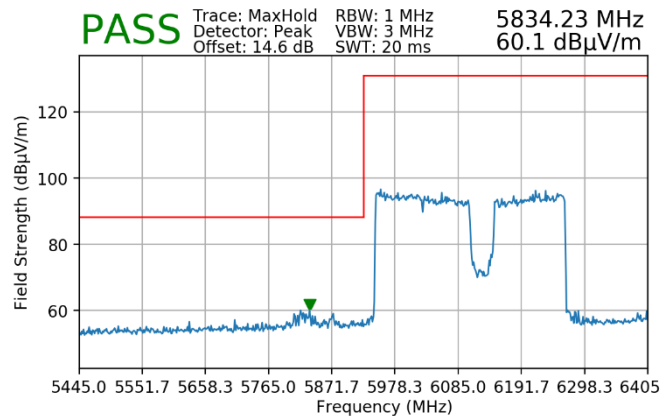


Plot 7-138. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 3*996+484T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index	01104
Distance of Measurements:	3 Meters
Operating Frequency:	6985MHz
Channel:	207

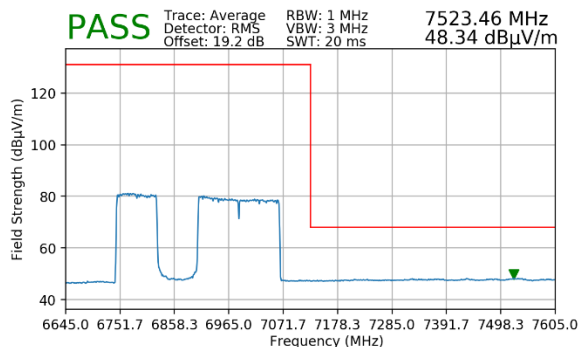

Plot 7-139. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 3*996+484T)

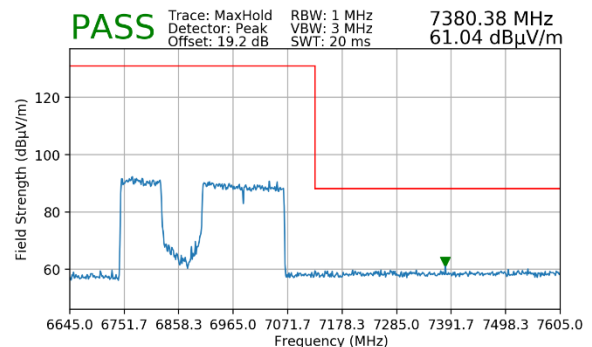

Plot 7-140. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 3*996+484T)

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-08.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 115 of 116

8 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Tablet FCC ID: A3LSMX930, IC: 649E-SMX930** is in compliance with FCC Part Subpart E (15.407) of the FCC Rules and RSS-248 of the ISED Canada Rules for operation as a Dual Client Device.

FCC ID: A3LSMX930 IC: 649E-SMX930	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2505130048-08.A3L	Test Dates: 05/13/2025 - 07/18/2025	EUT Type: Portable Tablet	Page 116 of 116