

6. OCCUPIED BANDWIDTH

6.1. Applicable Standard

Requirements: CFR 47, Section 27.53(m)(6) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. With respect to television operations, measurements must be made of the separate visual and aural operating powers at sufficiently frequent intervals to ensure compliance with the rules.


6.2. Test Equipment List and Details

Manufacturer	Model / Equipment	Serial No.	Calibration Due
Agilent	6674A / DC Power Supply	3501A00901	05/14/2011
WEINSCHEL	67-30-33 / Attenuator	BU5347	01/06/2011
WEINSCHEL	67-30-33 / Attenuator	BR0530	01/14/2011
WEINSCHEL	AF117A-69-31 / STEP ATTENUATOR	11787	11/12/2011
WEINSCHEL	AF117A-69-31 / STEP ATTENUATOR	639	11/12/2011
Agilent	N9020A / MXA Signal Analyzer	US46220219	03/03/2011
Agilent	11636B / Power Divider	11377	12/24/2010

6.3. Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 29 of 95

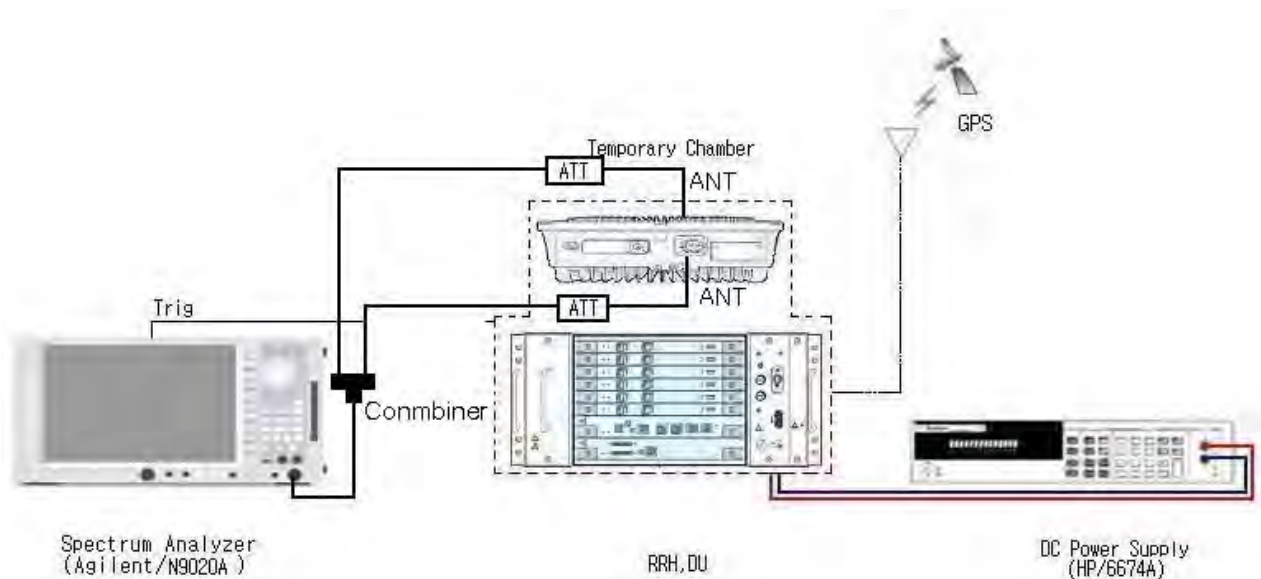

The EUT was connected to a spectrum analyzer enabled with an occupied bandwidth function via its antenna port. Measurements were performed to determine the occupied bandwidth in accordance with FCC Part 2.1049. The occupied bandwidth was measured from the fundamental emission at the bottom, middle and top channels. The occupied bandwidth was measured using the built in occupied bandwidth function of the spectrum analyzer. It was set to measure the bandwidth where 99% of the signal power was contained. The analyzer automatically configures the measurement bandwidths to make an accurate measurement based on the channel bandwidth and channel spacing of the EUT.

6.3.1. Environmental Conditions:

Temperature:	25 °C
Relative Humidity:	29 %

6.4. Test Result

: PASS

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 30 of 95

6.4.1. Test Data at Output 1

Modulation	Channel	Frequency	Measured Bandwidth	
			99 %	26 dB
QPSK	Low	2499.00	4.5884	4.858
	Middle	2543.25	4.5889	4.860
	High	2593.00	4.5884	4.859
16QAM	Low	2499.00	4.5882	4.859
	Middle	2543.25	4.5881	4.862
	High	2593.00	4.5880	4.862
64QAM	Low	2499.00	4.5882	4.858
	Middle	2543.25	4.5891	4.858
	High	2593.00	4.5885	4.857

6.4.2. Test Data at Output Port 2

Modulation	Channel	Frequency	Measured Bandwidth	
			99 %	26 dB
QPSK	Low	2499.00	4.5885	4.859
	Middle	2543.25	4.5882	4.862
	High	2593.00	4.5889	4.861
16QAM	Low	2499.00	4.5890	4.861
	Middle	2543.25	4.5880	4.861
	High	2593.00	4.5887	4.858
64QAM	Low	2499.00	4.5885	4.860
	Middle	2543.25	4.5890	4.860
	High	2593.00	4.5887	4.861


6.4.3. Combined Test Data at Output Port

Modulation	Channel	Frequency	Measured Bandwidth	
			99 %	26 dB
QPSK	Low	2499.00	4.5420	4.833
	Middle	2543.25	4.5368	4.830
	High	2593.00	4.2055	4.784
16QAM	Low	2499.00	4.5423	4.830
	Middle	2543.25	4.5369	4.829
	High	2593.00	4.2063	4.785
64QAM	Low	2499.00	4.5415	4.832
	Middle	2543.25	4.5367	4.830
	High	2593.00	4.2050	4.784


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 32 of 95

6.4.4. Test Plot at Output Port 1

(QPSK Low Channel)

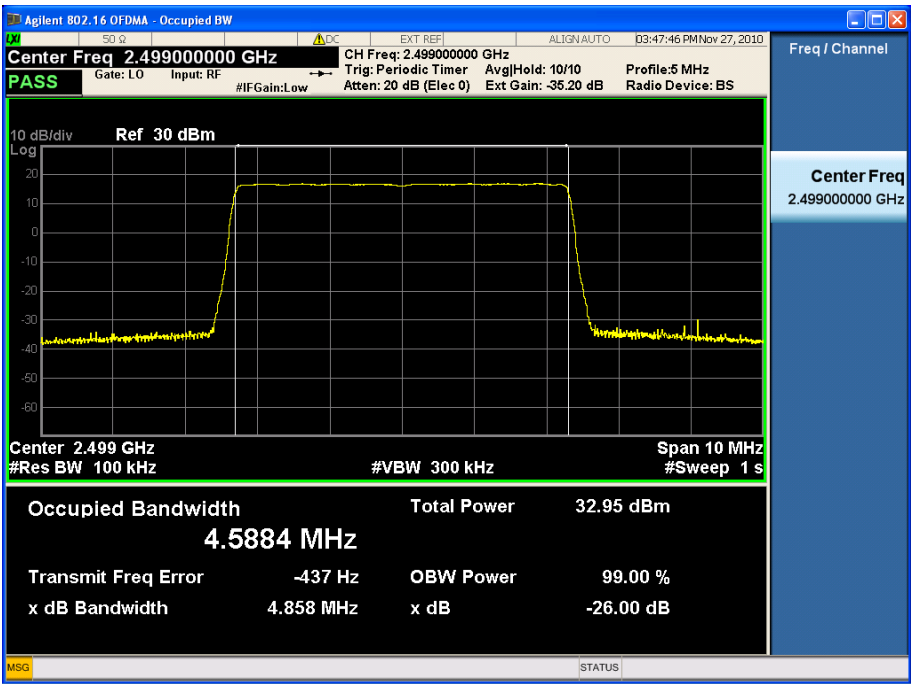


(QPSK Middle Channel)

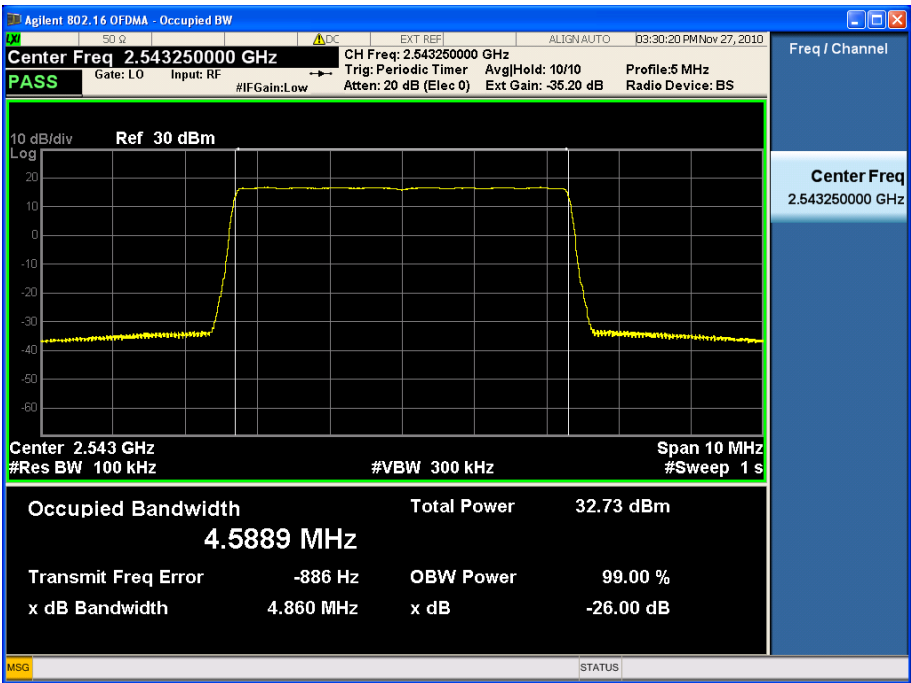


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 33 of 95

(QPSK High Channel)

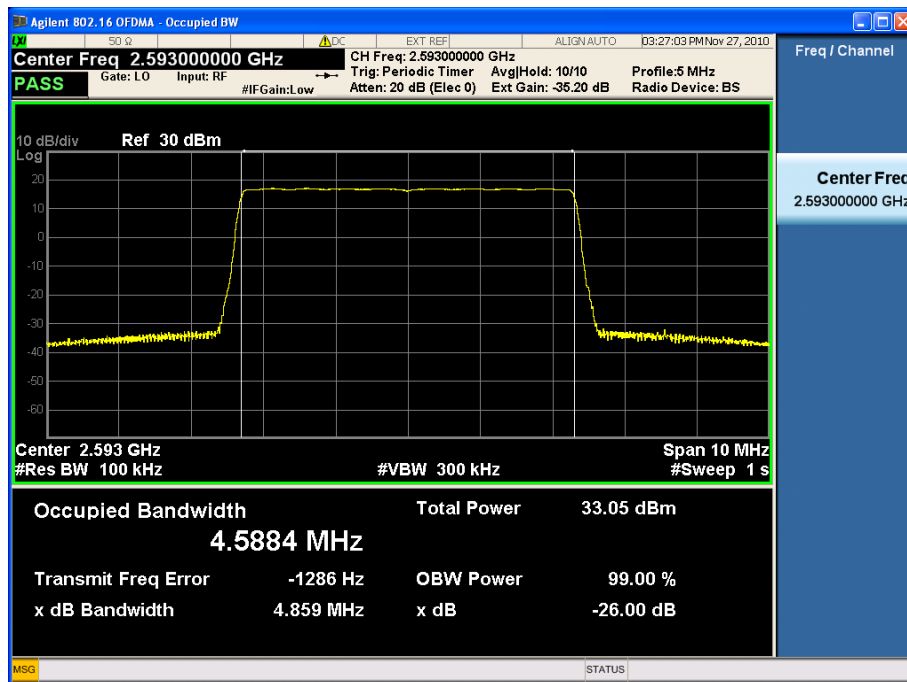


(16QAM Low Channel)

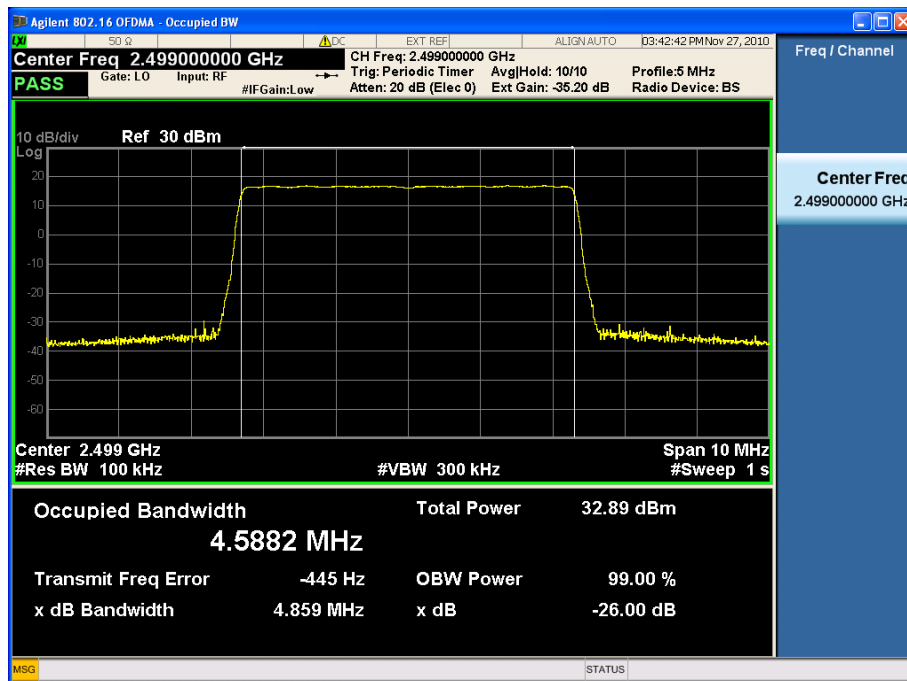


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 34 of 95

(16QAM Middle Channel)

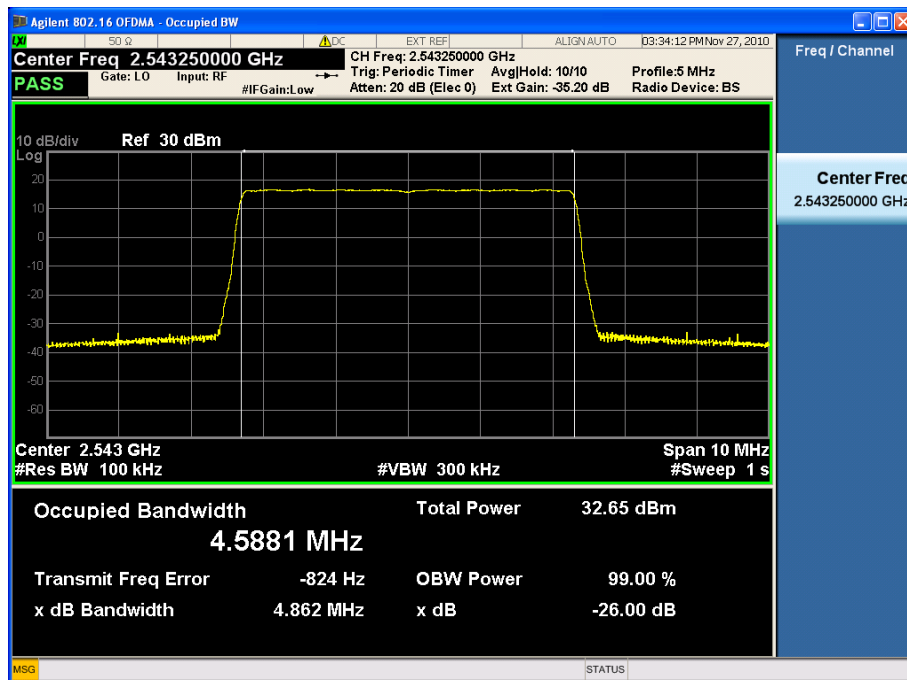


(16QAM High Channel)

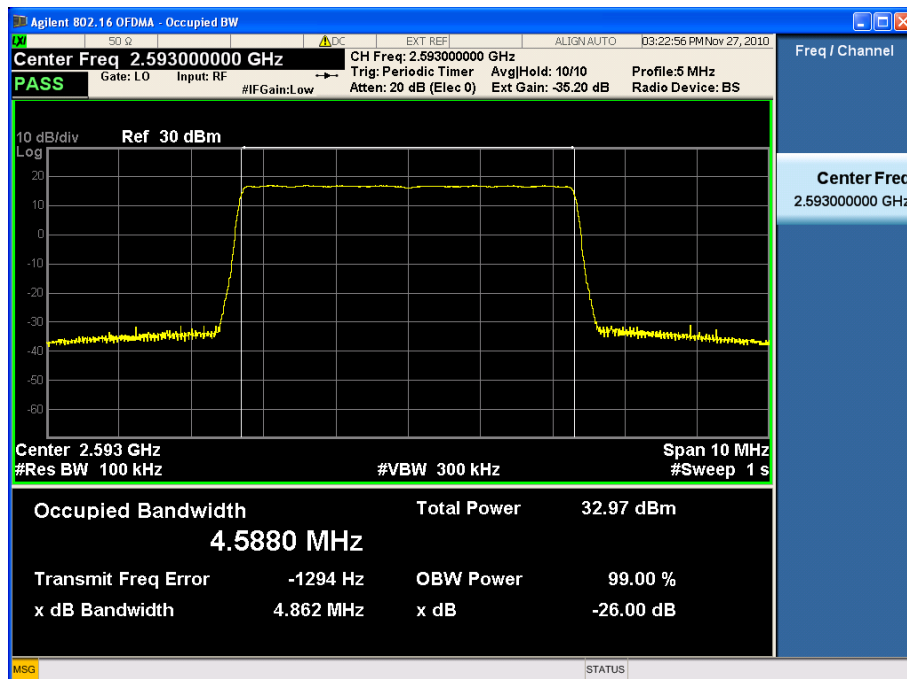


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 35 of 95

(64QAM Low Channel)

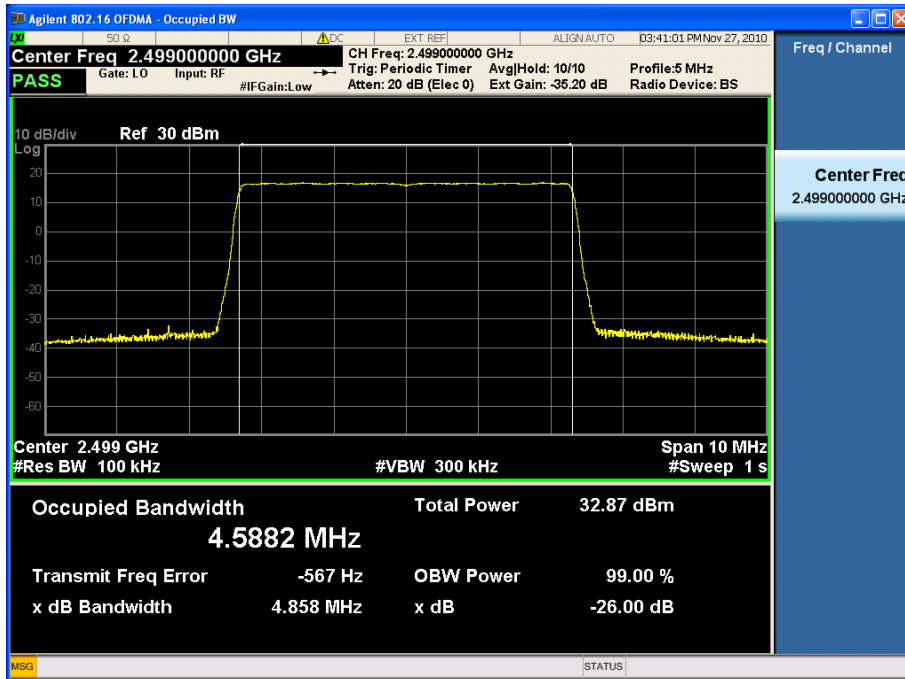


(64QAM Middle Channel)

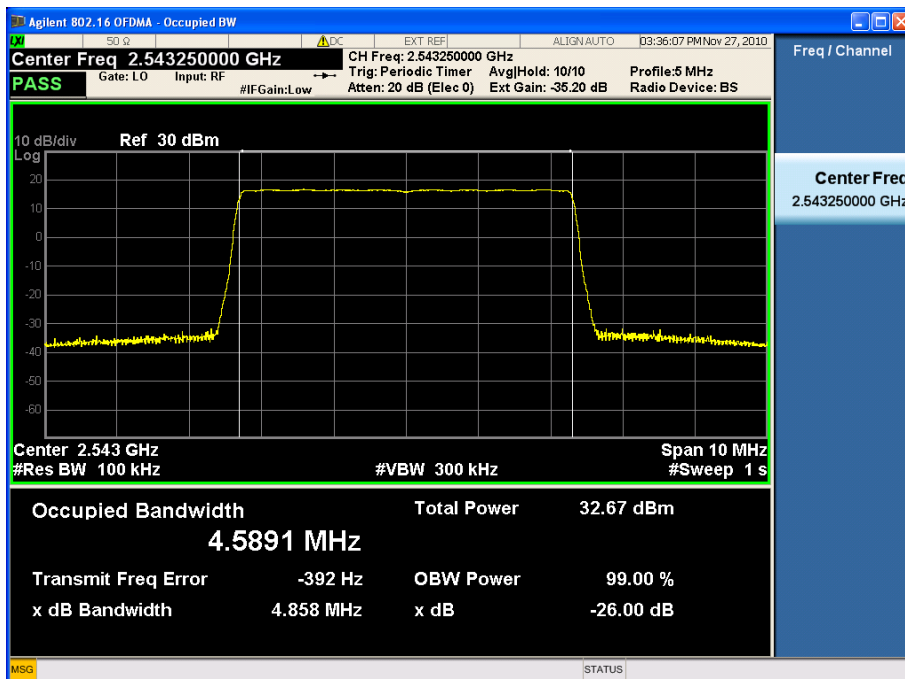

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 36 of 95


(64QAM High Channel)

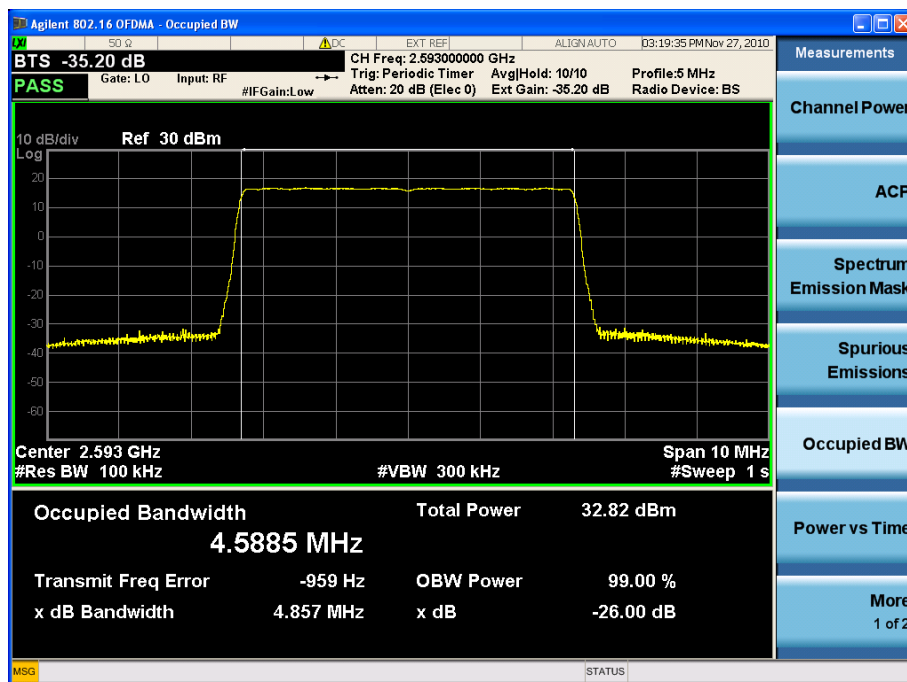


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 37 of 95

6.4.5. Test Plot at Output Port 2

(QPSK Low Channel)

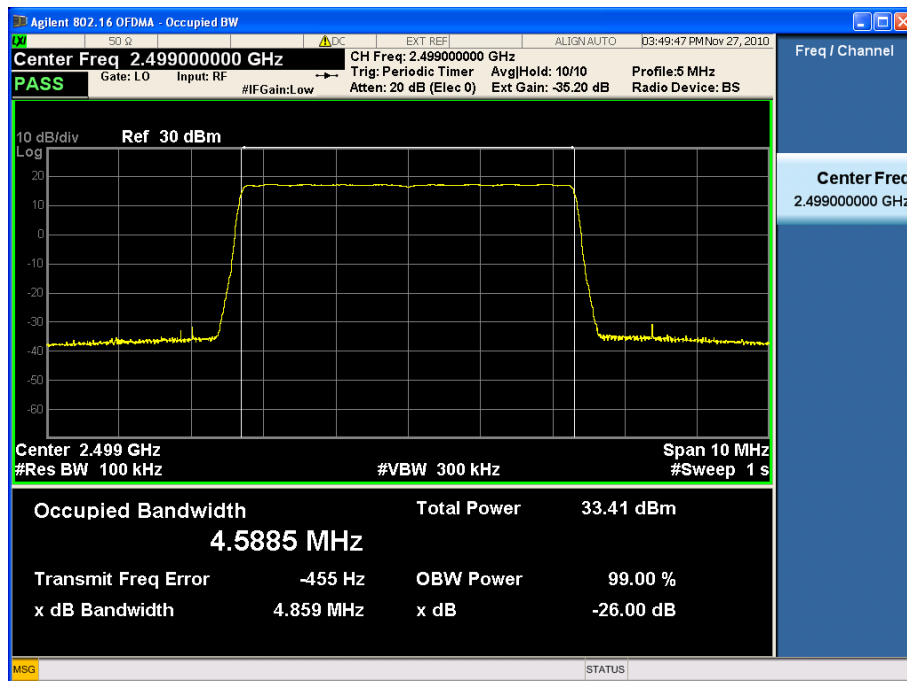


(QPSK Middle Channel)

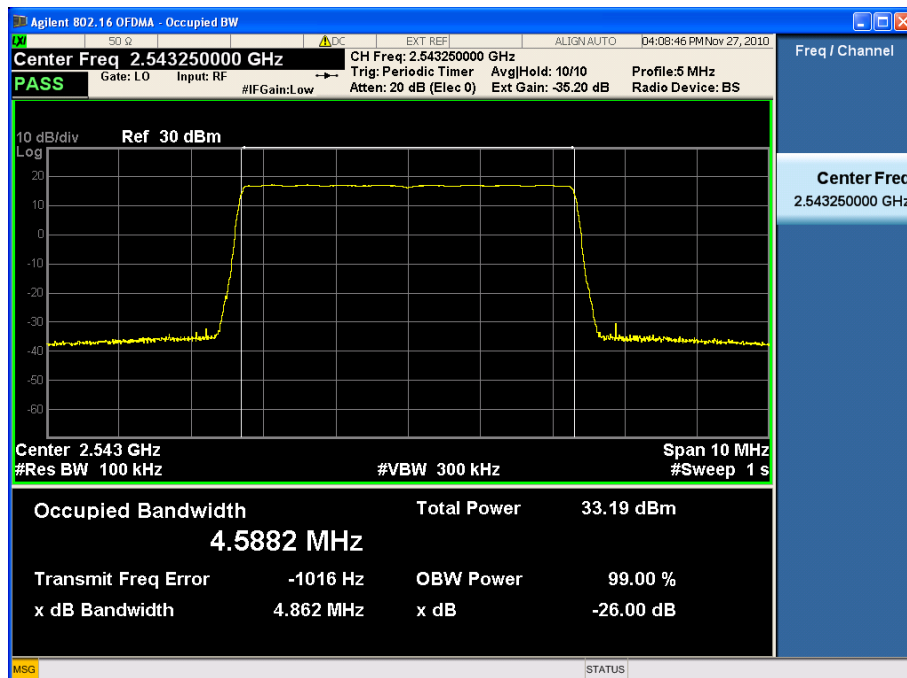


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 38 of 95

(QPSK High Channel)

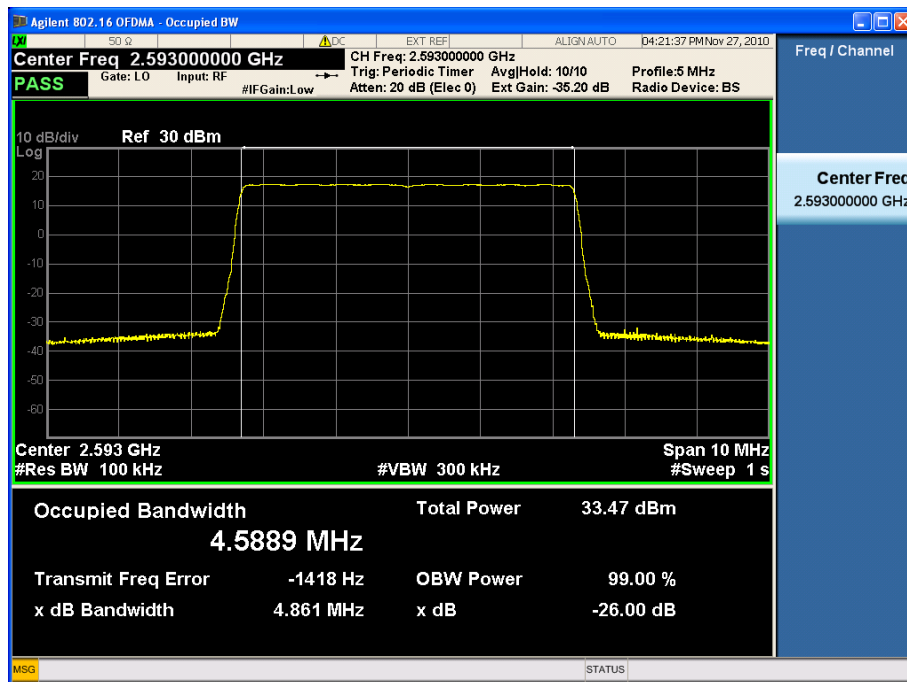


(16QAM Low Channel)

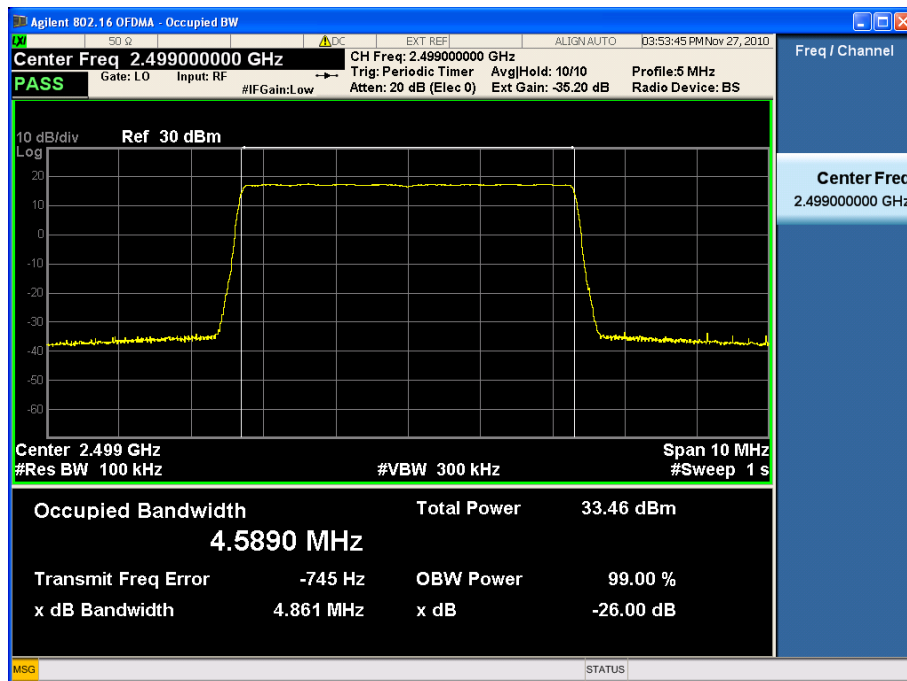


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 39 of 95

(16QAM Middle Channel)

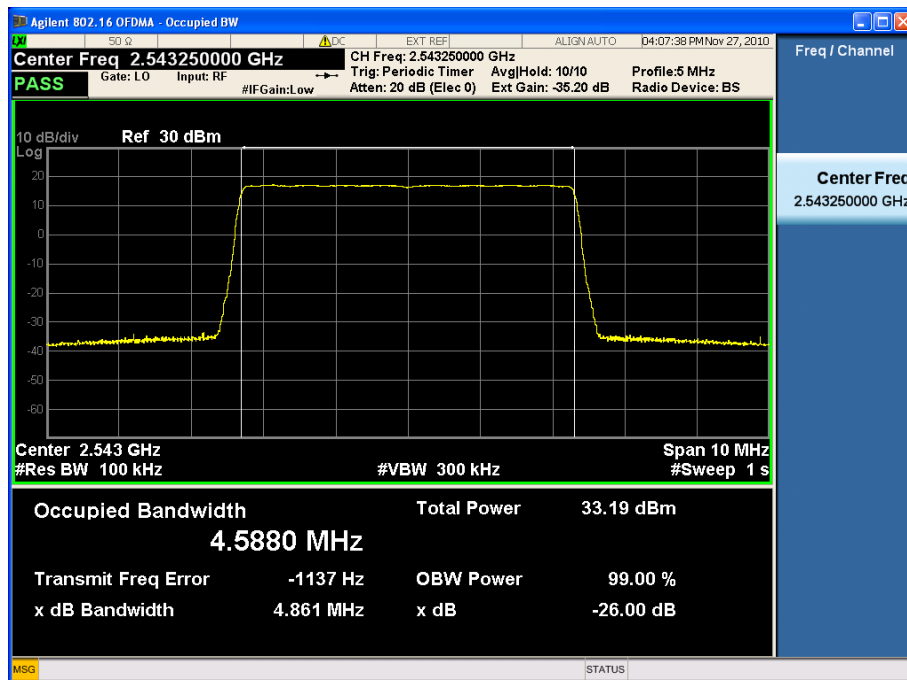


(16QAM High Channel)

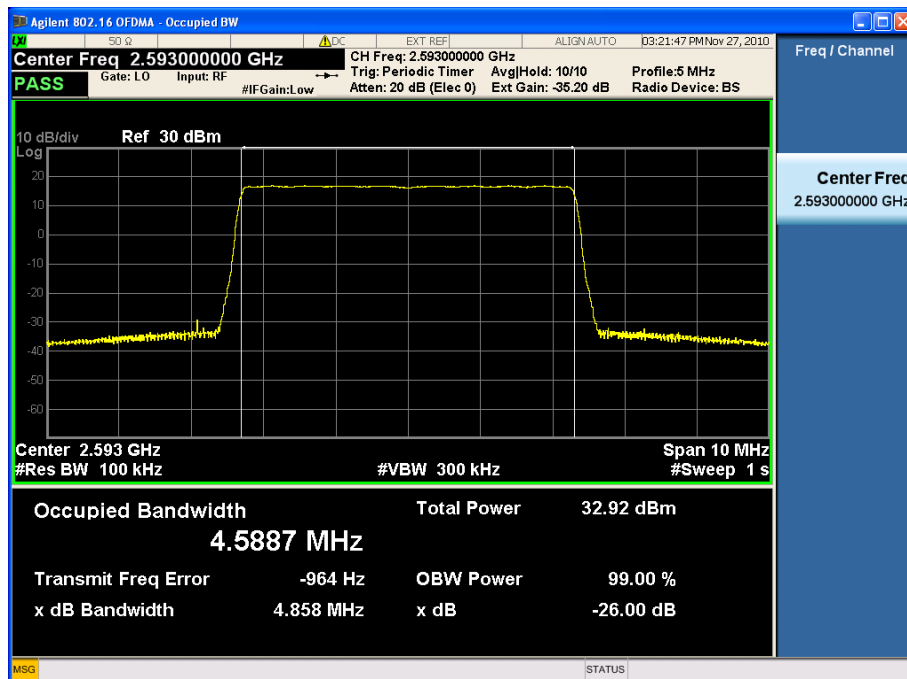


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 40 of 95

(64QAM Low Channel)

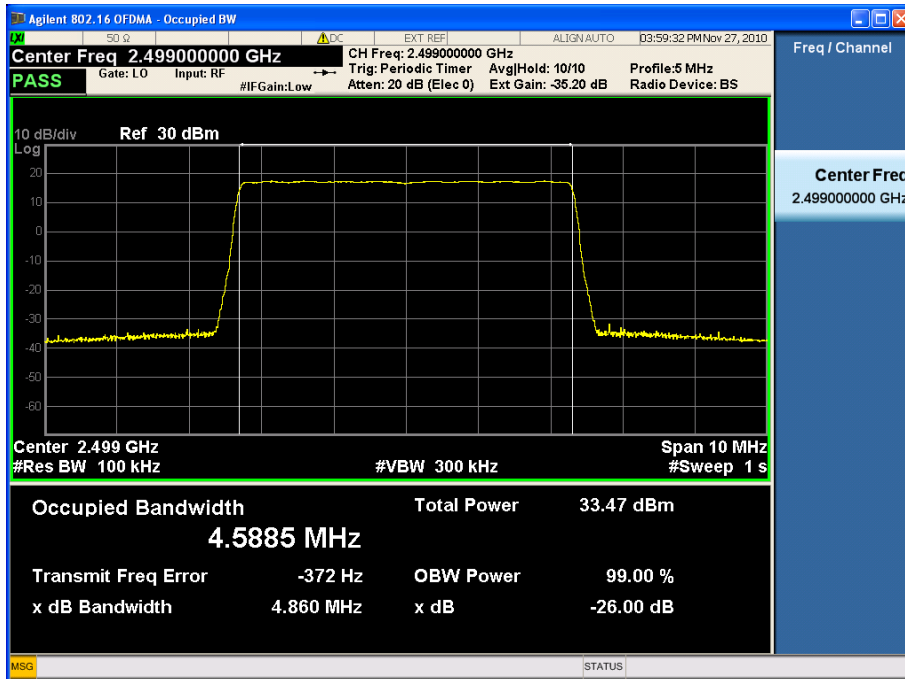


(64QAM Middle Channel)

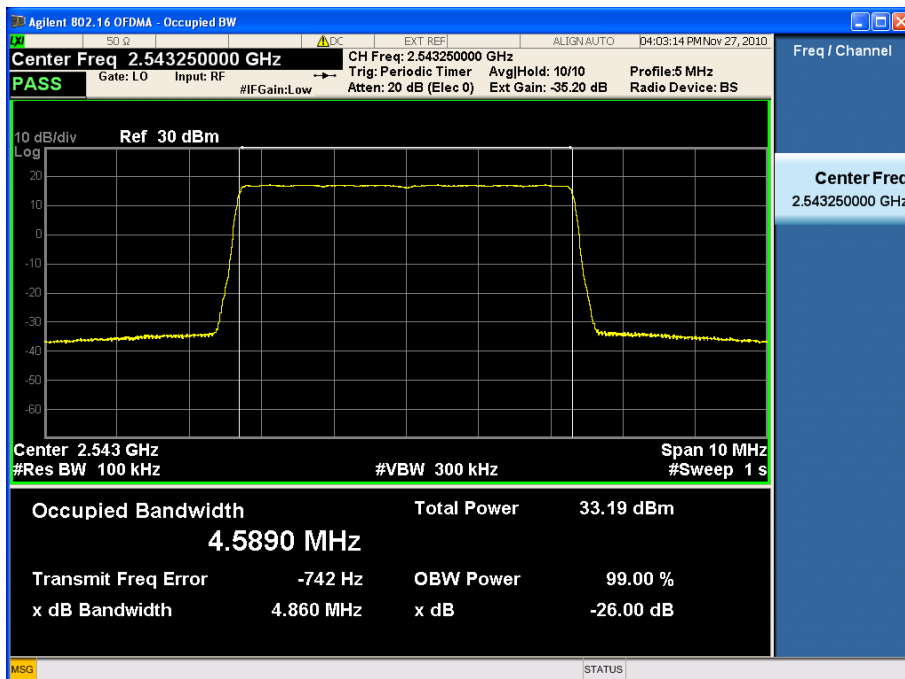

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 41 of 95


(64QAM High Channel)

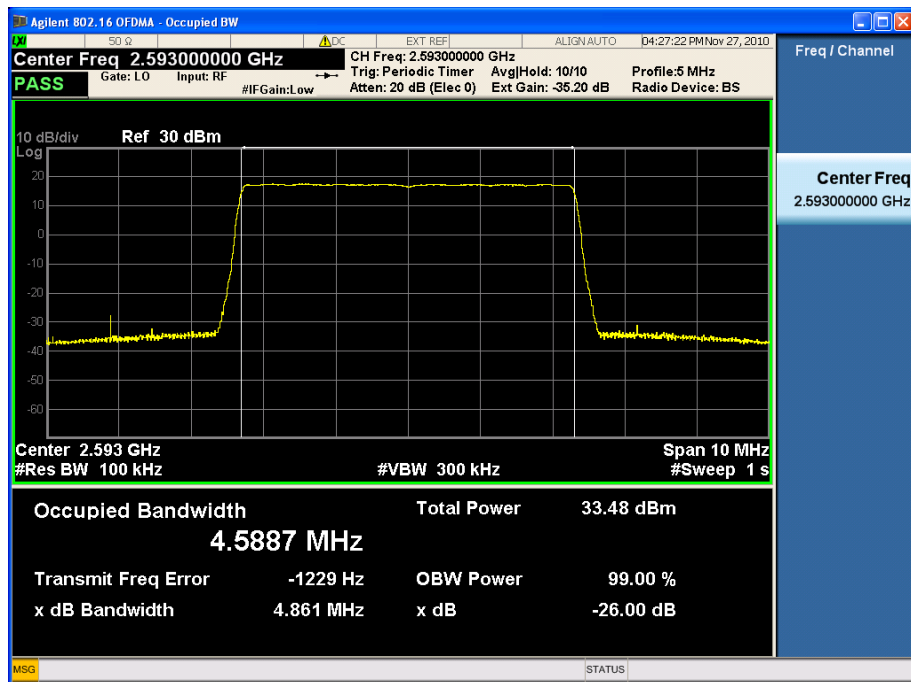


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 42 of 95

6.4.6. Combined Test Plot at Output Port

(QPSK Low Channel)

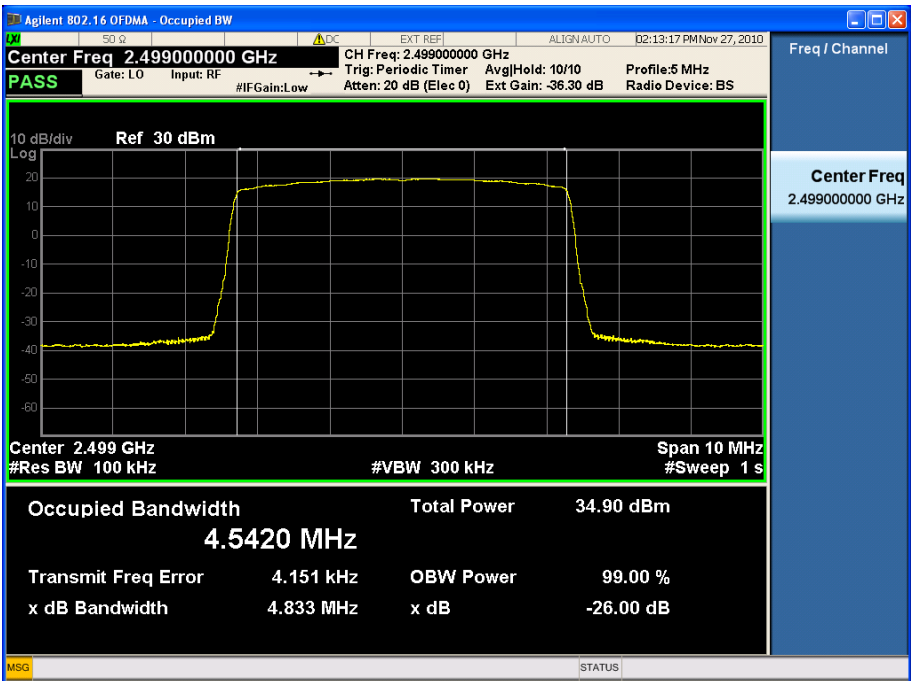


(QPSK Middle Channel)

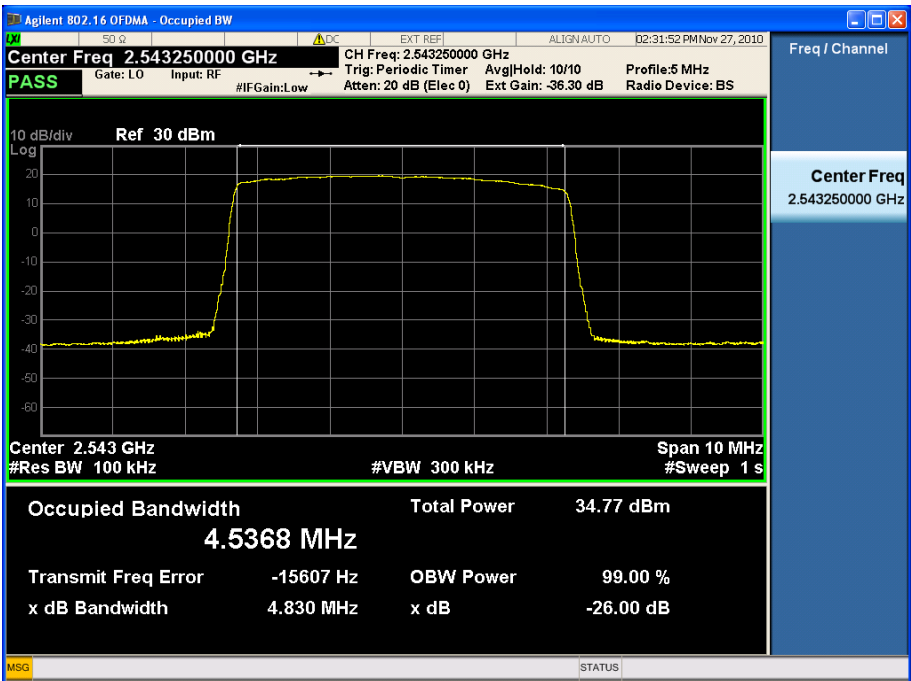


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 43 of 95

(QPSK High Channel)

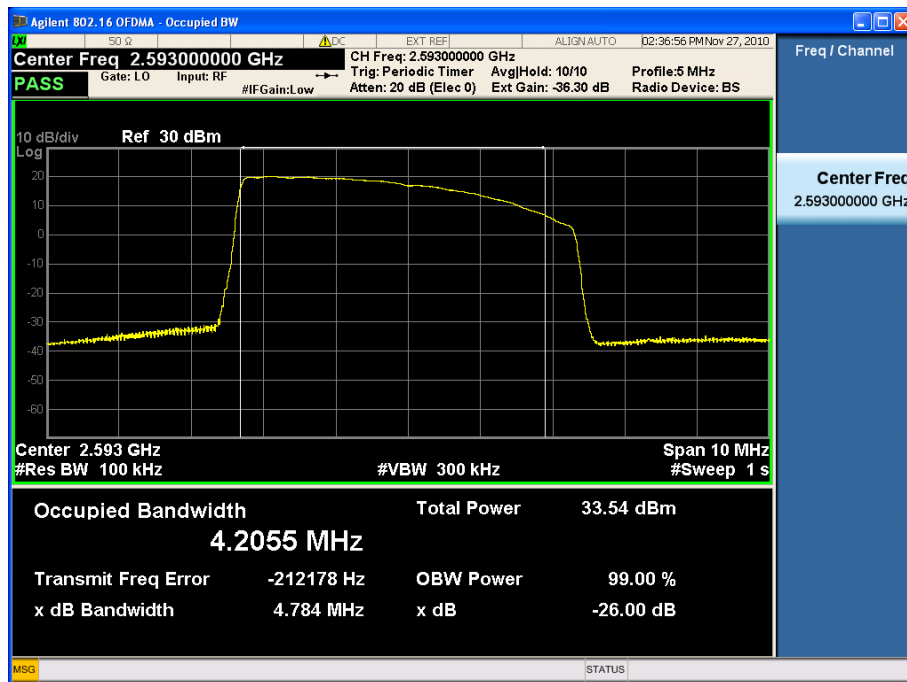


(16QAM Low Channel)

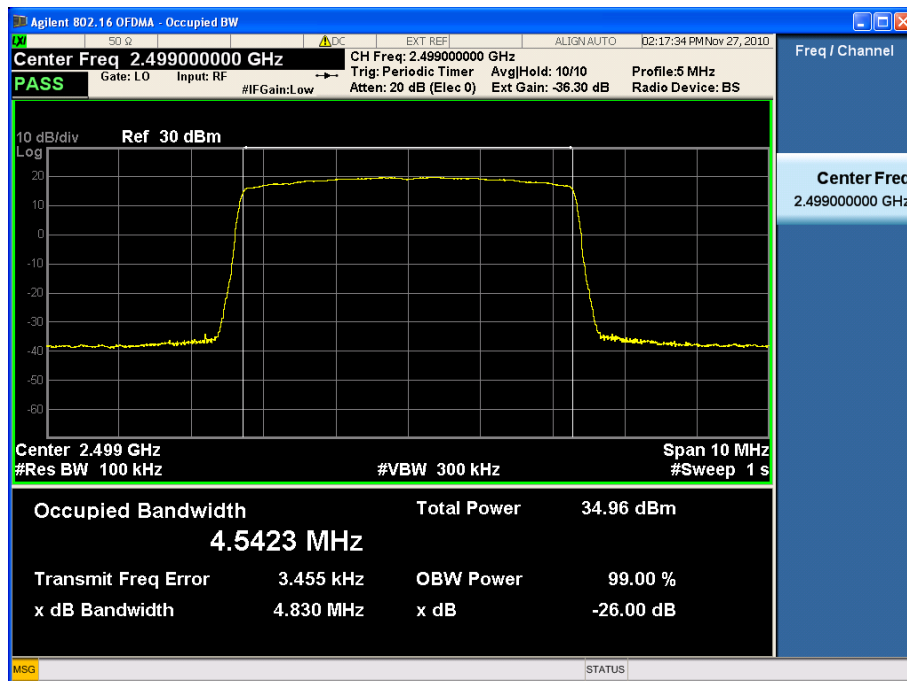


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 44 of 95

(16QAM Middle Channel)

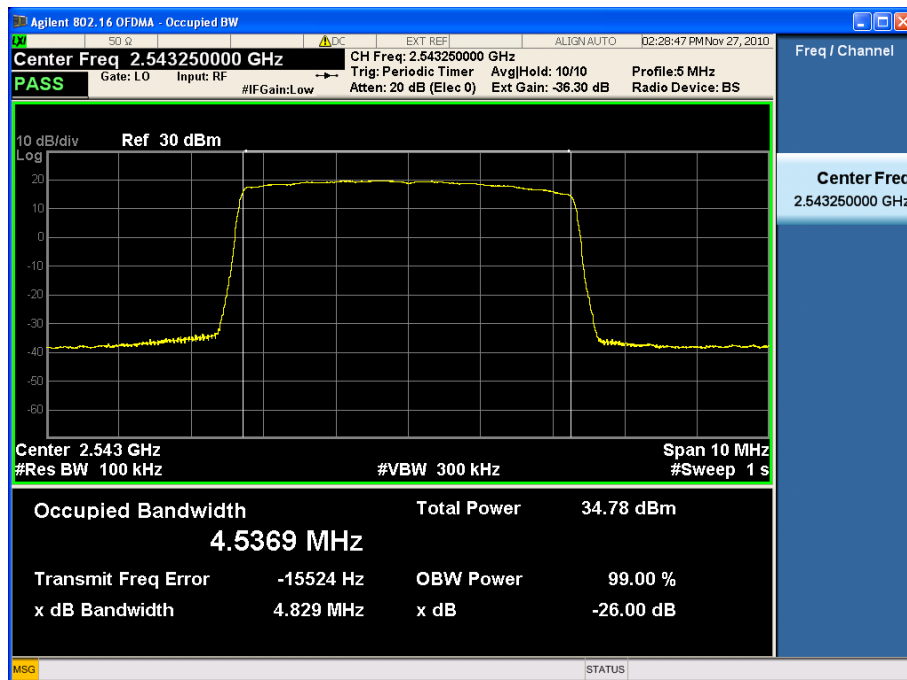


(16QAM High Channel)

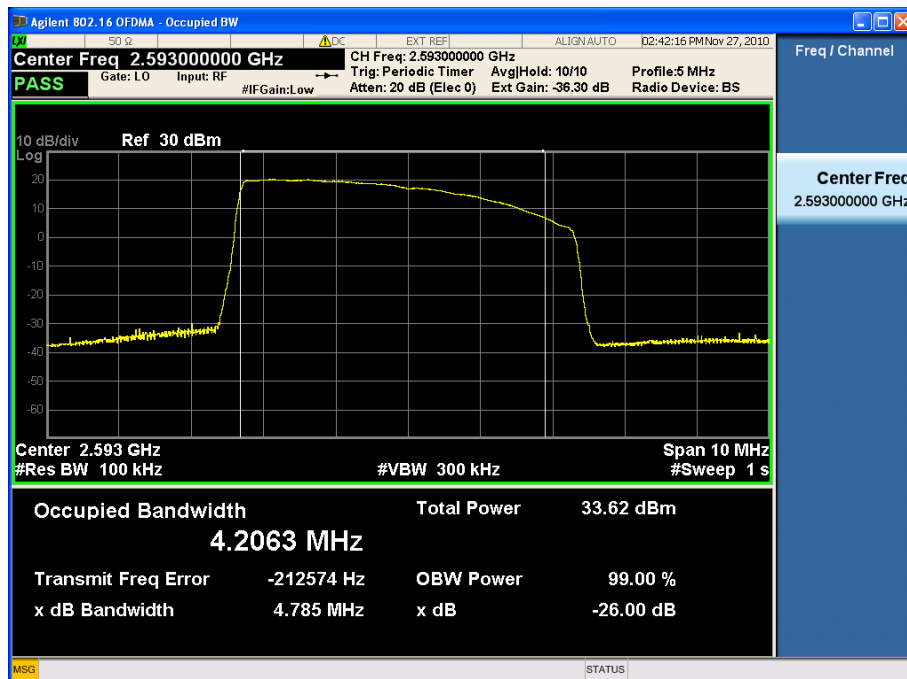


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 45 of 95

(64QAM Low Channel)

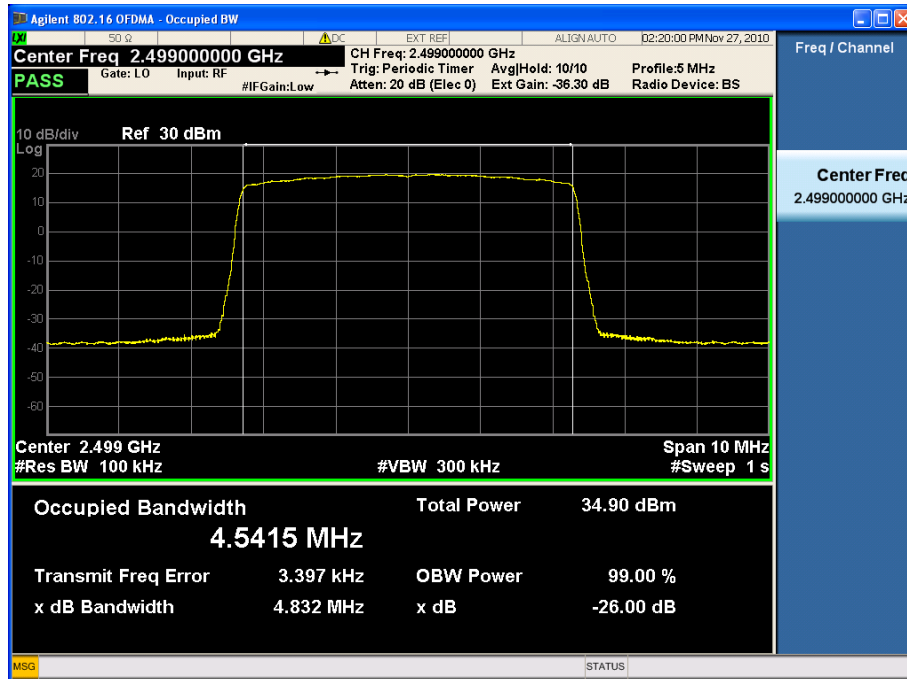


(64QAM Middle Channel)

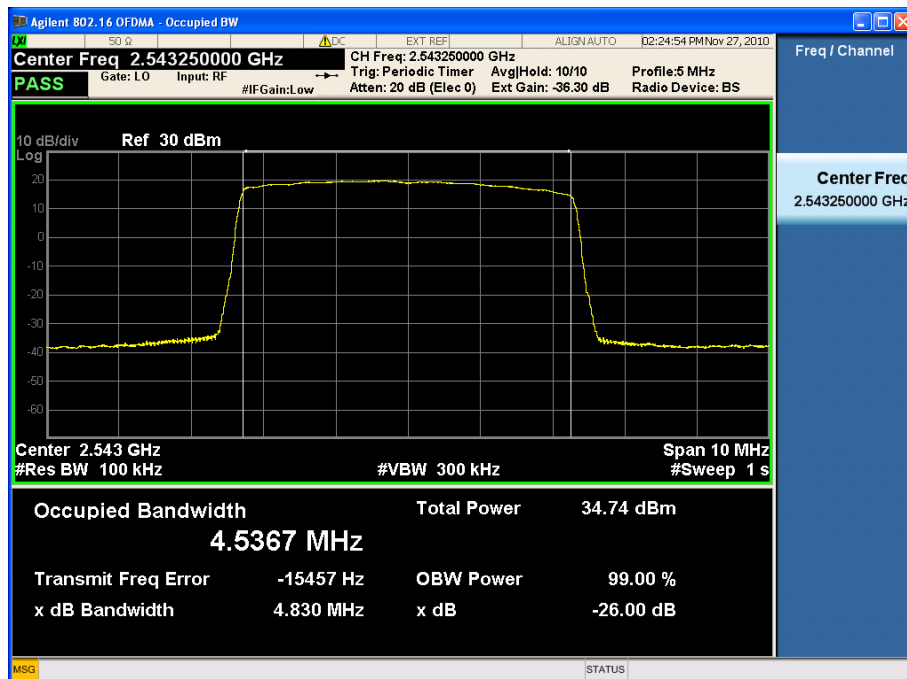

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 46 of 95

(64QAM High Channel)

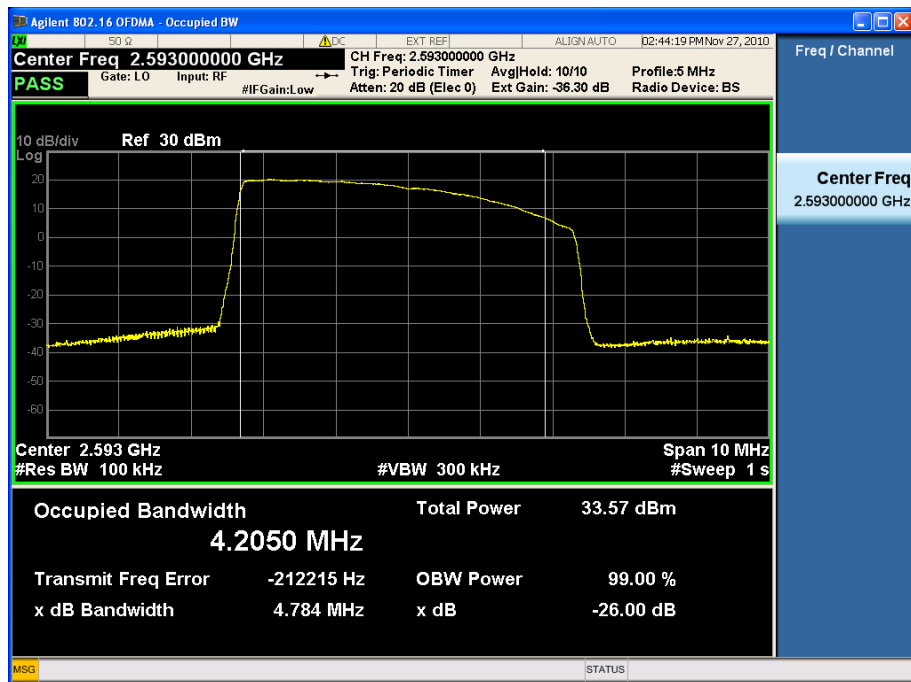

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 47 of 95

7. BAND EDGES

7.1. Applicable Standard


According to §27.53(m), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (p) by a factor of at least $43 + 10 \log (p)$ dB.

7.2. Test Equipment List and Details

Manufacturer	Model / Equipment	Serial No.	Calibration Due
Agilent	6674A / DC Power Supply	3501A00901	05/14/2011
WEINSCHEL	67-30-33 / Attenuator	BU5347	01/06/2011
WEINSCHEL	67-30-33 / Attenuator	BR0530	01/14/2011
WEINSCHEL	AF117A-69-31 / STEP ATTENUATOR	11787	11/12/2011
WEINSCHEL	AF117A-69-31 / STEP ATTENUATOR	639	11/12/2011
Agilent	N9020A / MXA Signal Analyzer	US46220219	03/03/2011
Agilent	11636B / Power Divider	11377	12/24/2010

7.3. Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

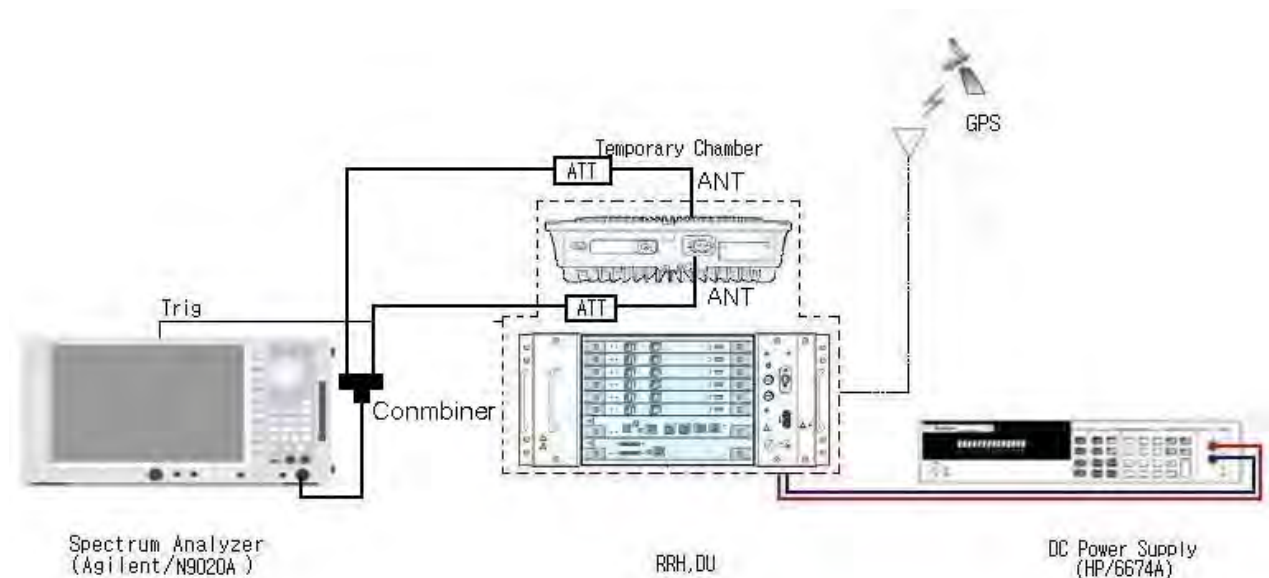

The center of the spectrum analyzer was set to block edge frequency.

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 48 of 95

The EUT provides the MIMO function which is able to transmit on the same channel with same data simultaneously therefore a combiner is used to sum the individual transmitter output power.

The test data is shown as a combined output in the report.

7.3.1. Environmental Conditions

Temperature:	25 °C
Relative Humidity:	26 %

7.4. Test Result

: PASS

7.4.1. Test data at Output 1

Modulation	Channel	Measured Frequency (MHz)	Max. Measured Value (dBm)	Limit (dBm)
QPSK	Low	2499.00	-38.450	-13.0
	High	2593.00	-35.936	
16QAM	Low	2499.00	-35.002	
	High	2593.00	-36.279	
64QAM	Low	2499.00	-37.737	
	High	2593.00	-40.091	

7.4.2. Test data at Output 2

Modulation	Channel	Measured Frequency (MHz)	Max. Measured Value (dBm)	Limit (dBm)
QPSK	Low	2499.00	-37.811	-13.0
	High	2593.00	-35.546	
16QAM	Low	2499.00	-40.101	
	High	2593.00	-37.036	
64QAM	Low	2499.00	-39.128	
	High	2593.00	-38.487	

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 49 of 95


7.4.3. Combined Test data at Output

Modulation	Channel	Measured Frequency (MHz)	Max. Measured Value (dBm)	Limit (dBm)
QPSK	Low	2499.00	-41.101	-13.0
	High	2593.00	-37.708	
16QAM	Low	2499.00	-41.218	
	High	2593.00	-40.370	
64QAM	Low	2499.00	-40.765	
	High	2593.00	-39.668	


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 50 of 95

7.4.4. Plot Data at Output 1

(QPSK Low Channel)

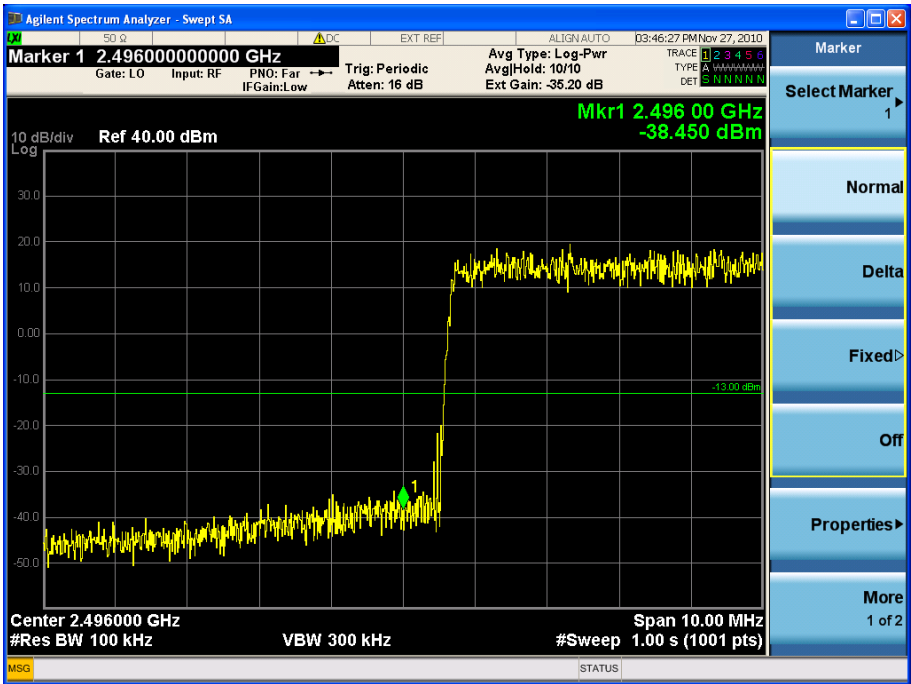


(QPSK High Channel)

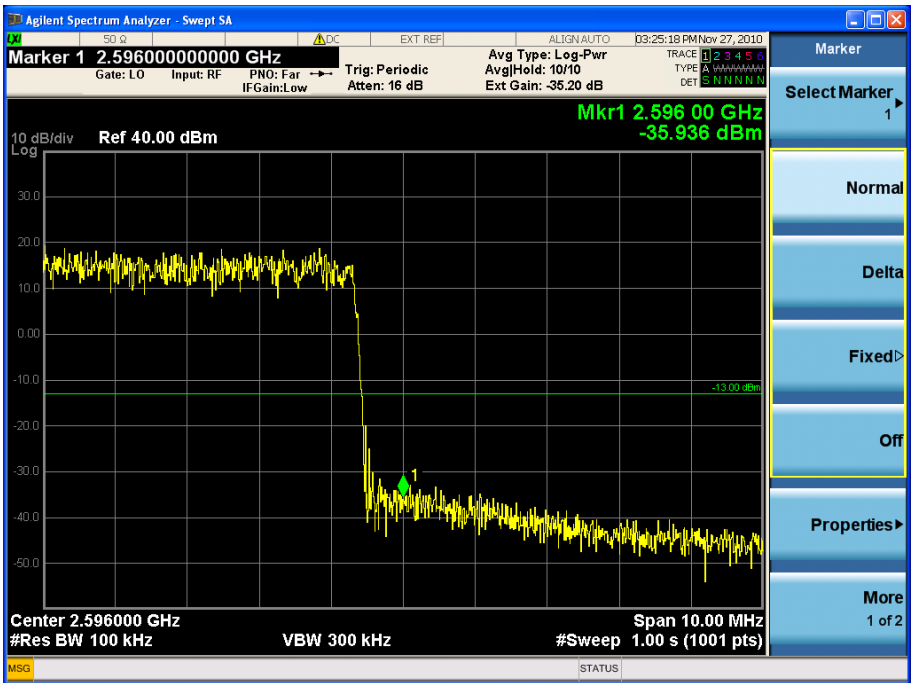


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 51 of 95

(16QAM Low Channel)

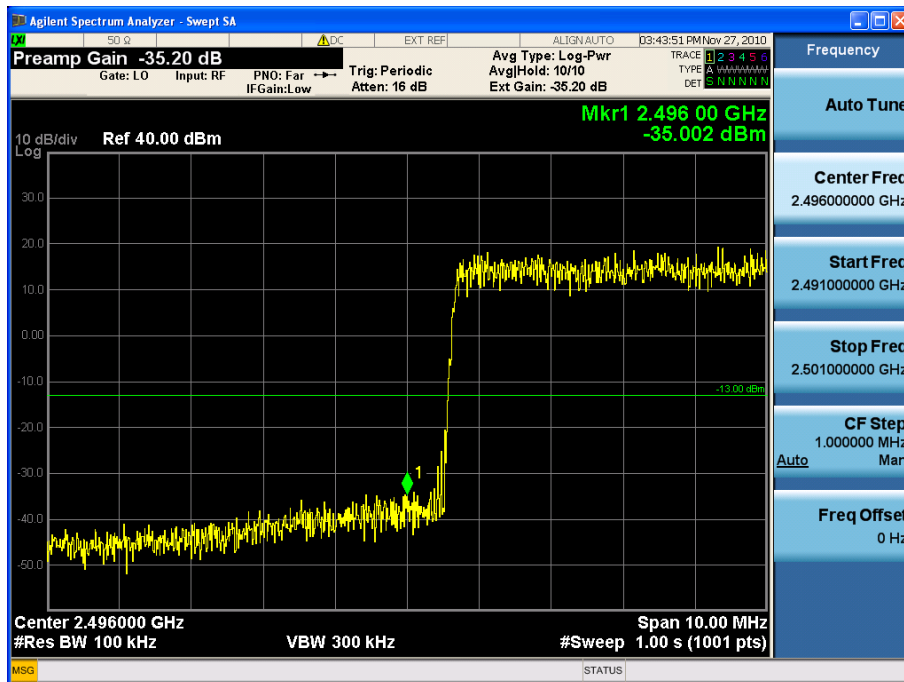


(16QAM High Channel)

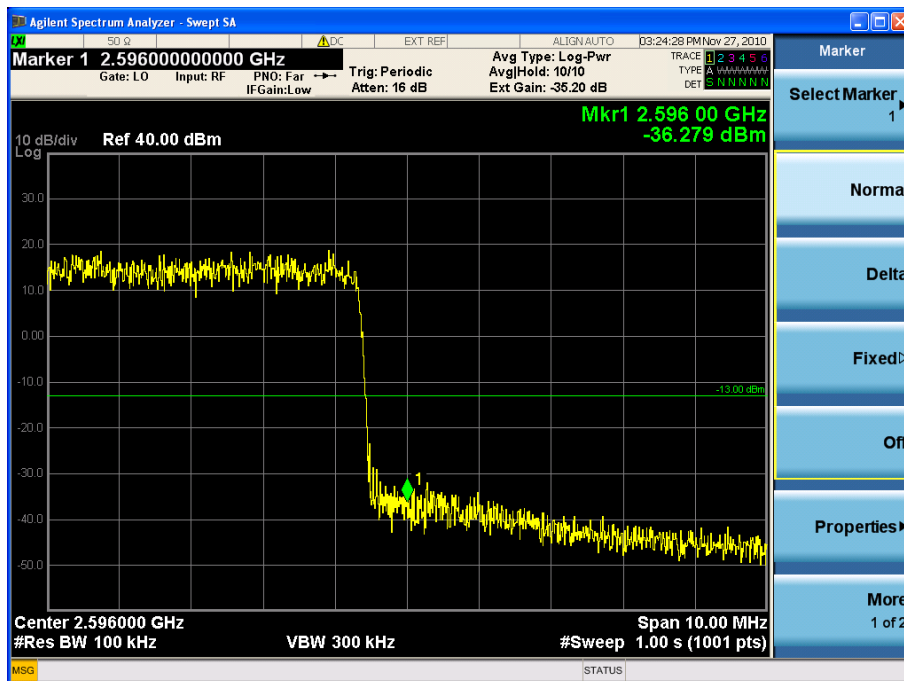


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 52 of 95

(64QAM Low Channel)

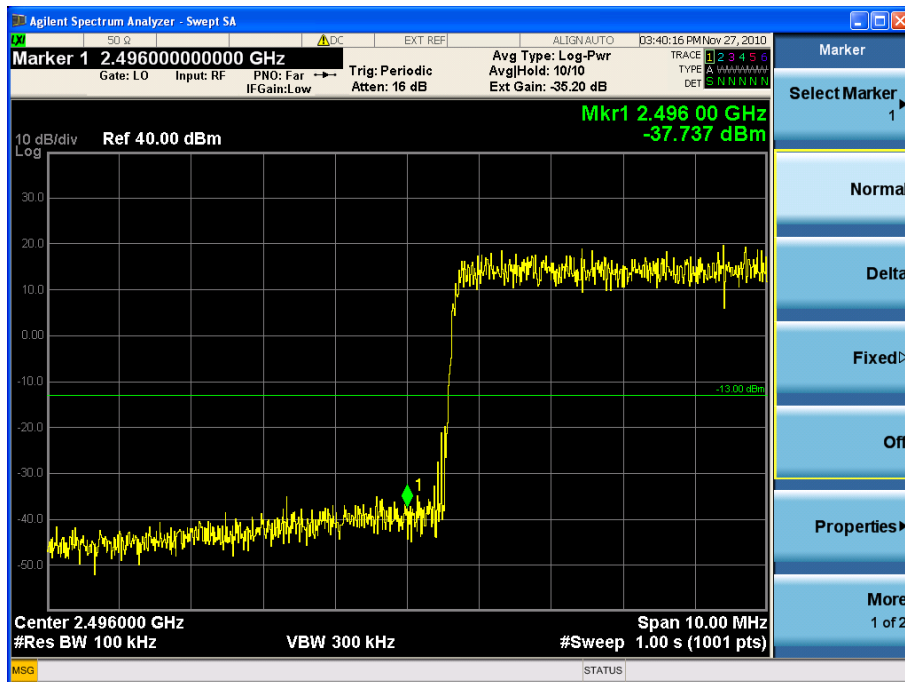


(64QAM High Channel)

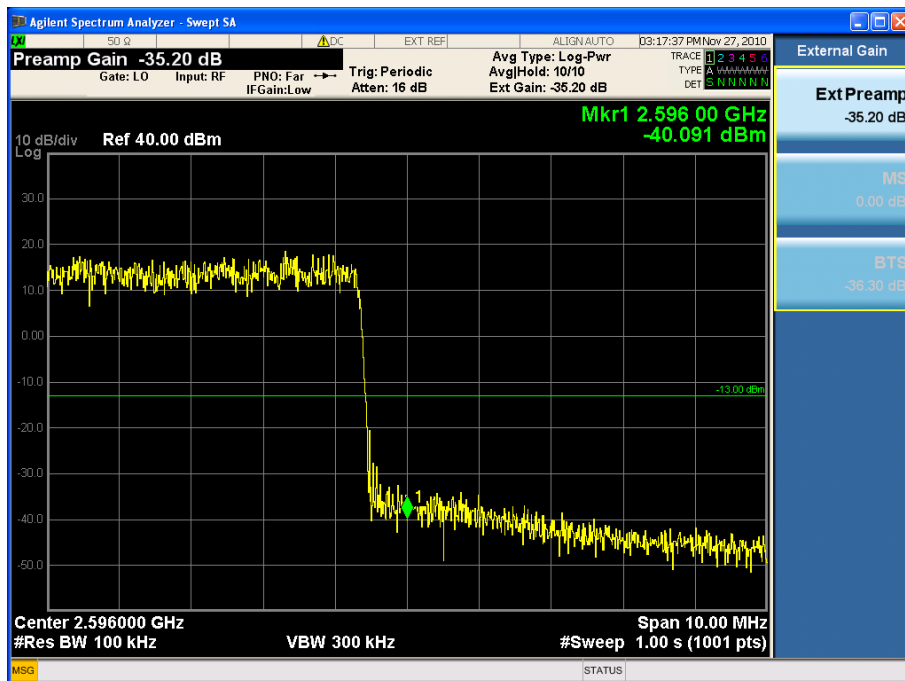


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 53 of 95

7.4.5. Plot Data at Output 2

(QPSK Low Channel)

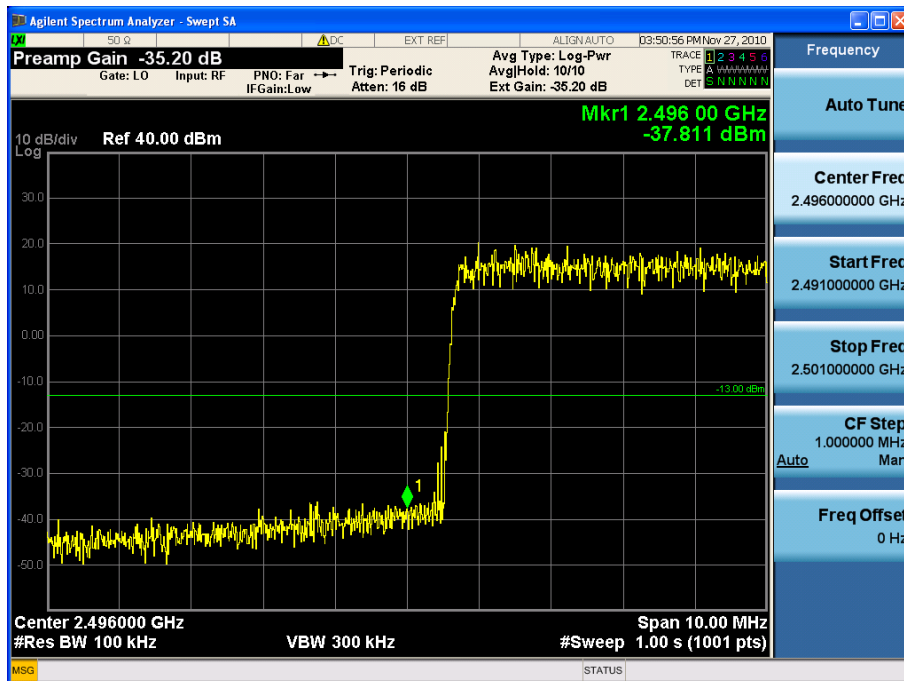


(QPSK High Channel)

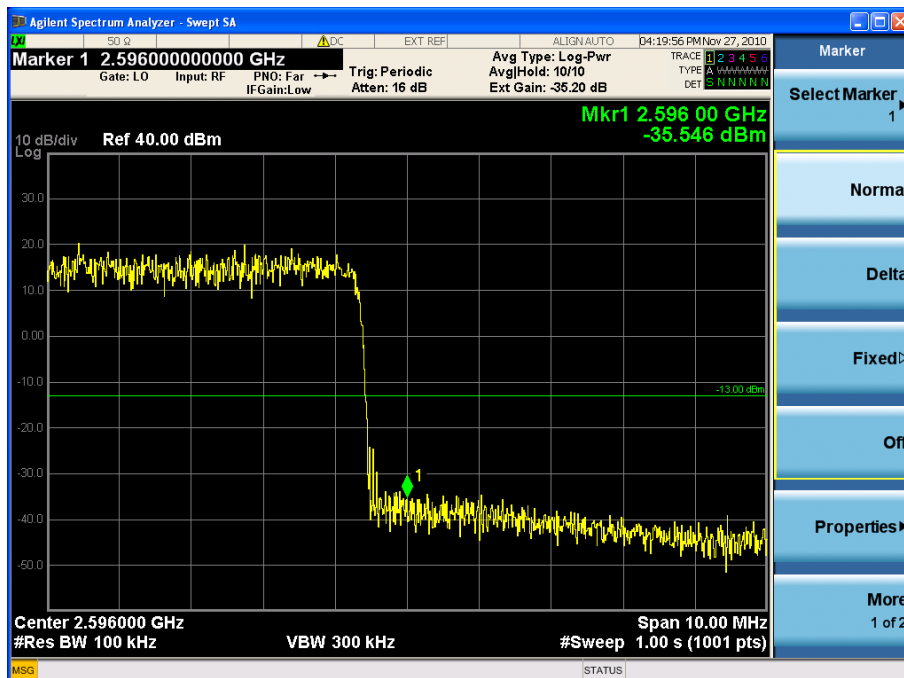


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 54 of 95

(16QAM Low Channel)

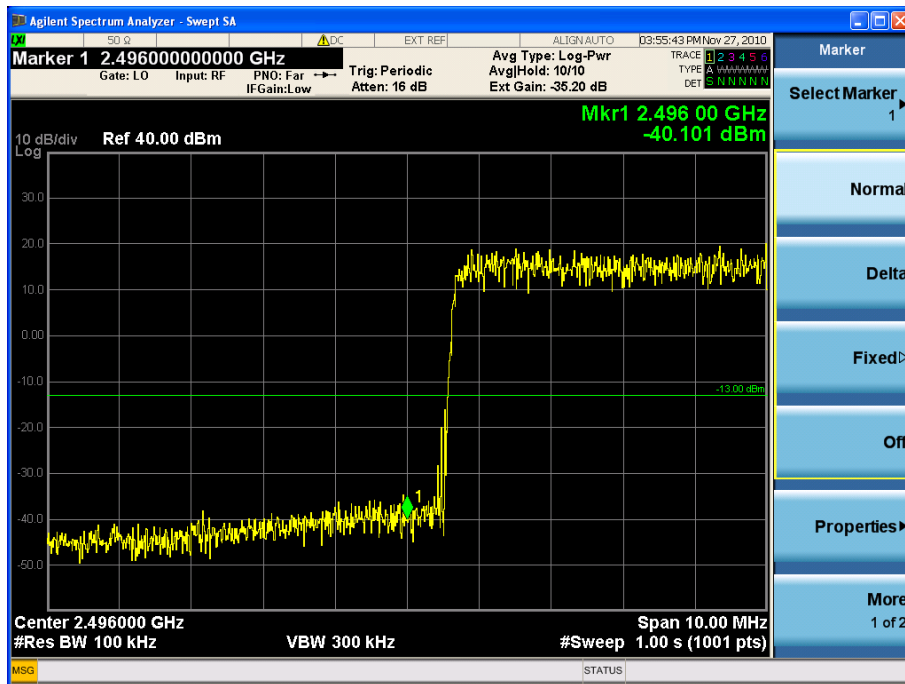


(16QAM High Channel)

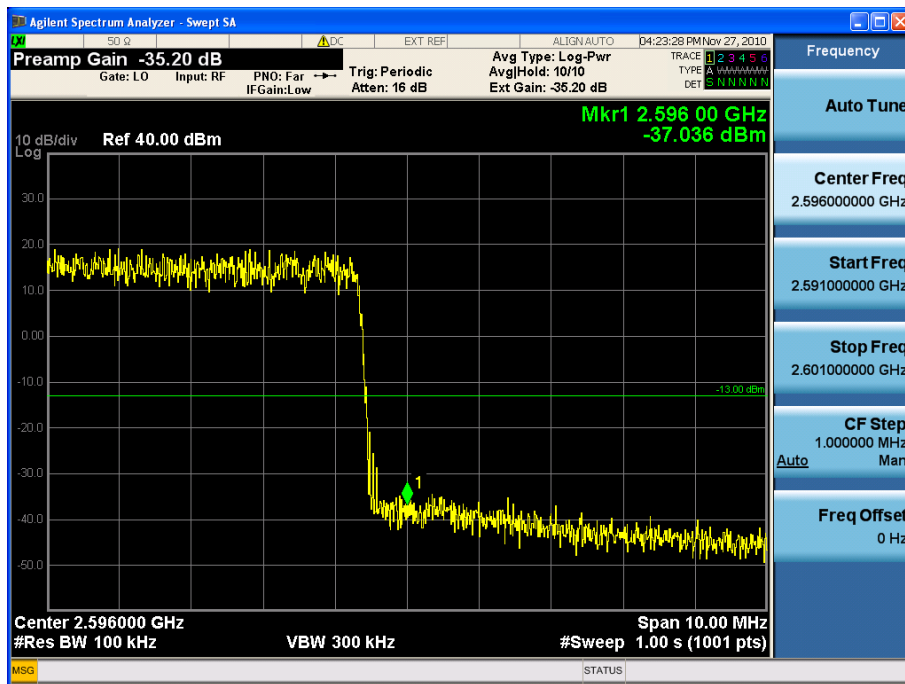


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 55 of 95

(64QAM Low Channel)

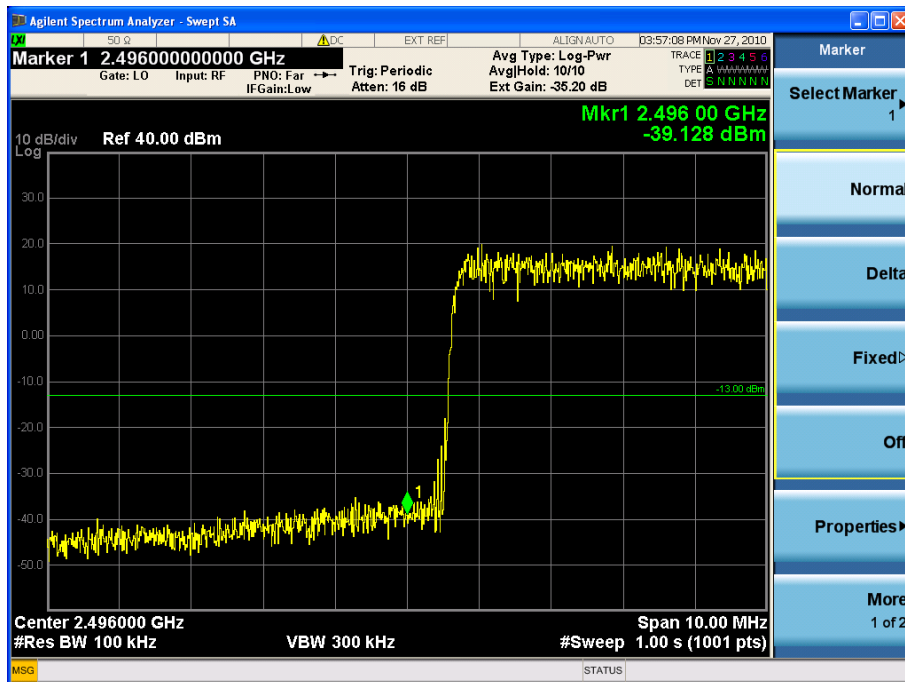


(64QAM High Channel)

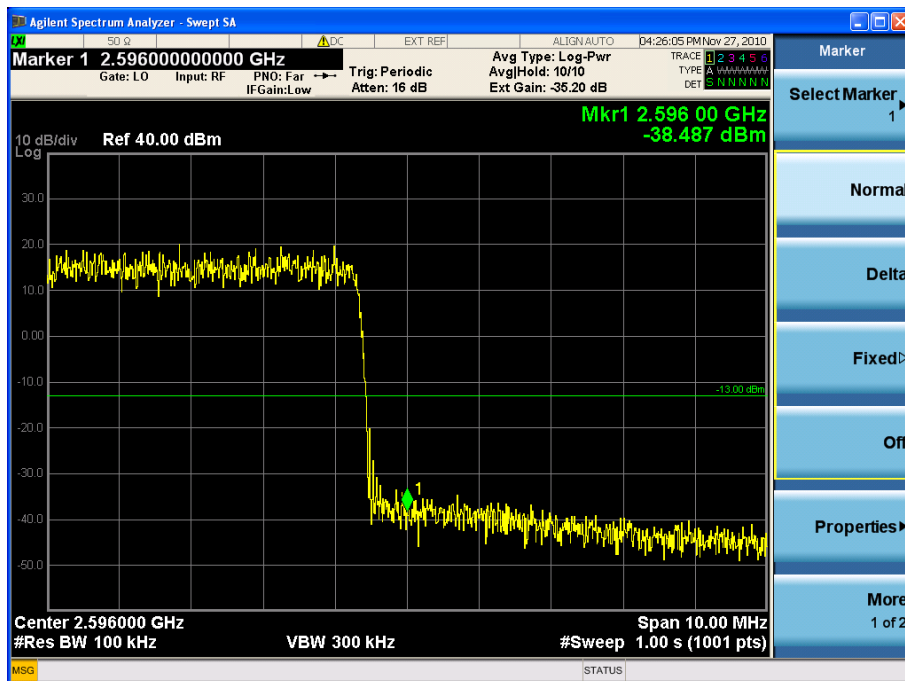


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 56 of 95

7.4.6. Combined Plot Data at Output

(QPSK Low Channel)

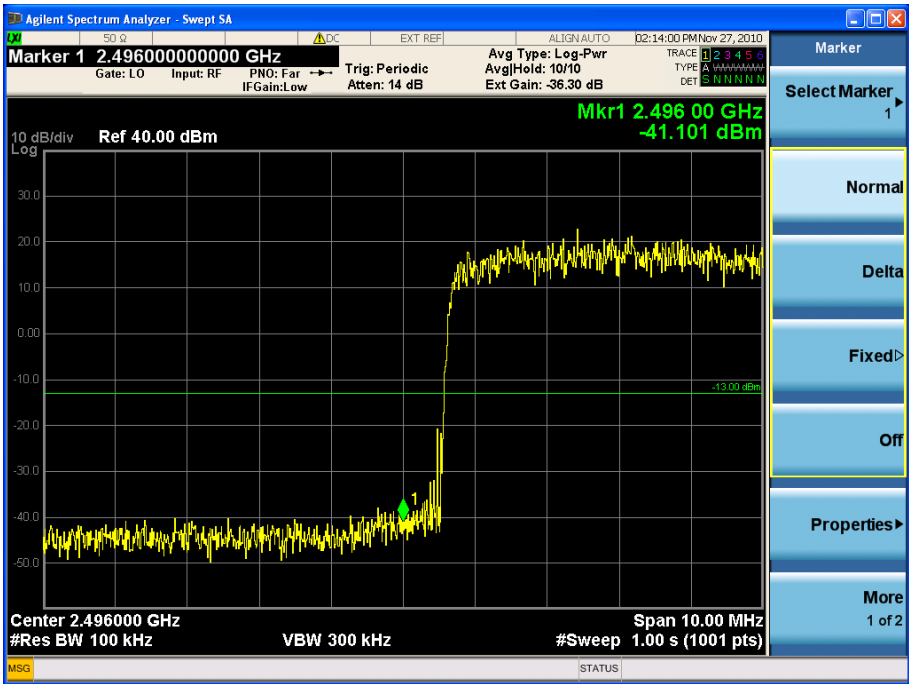


(QPSK High Channel)

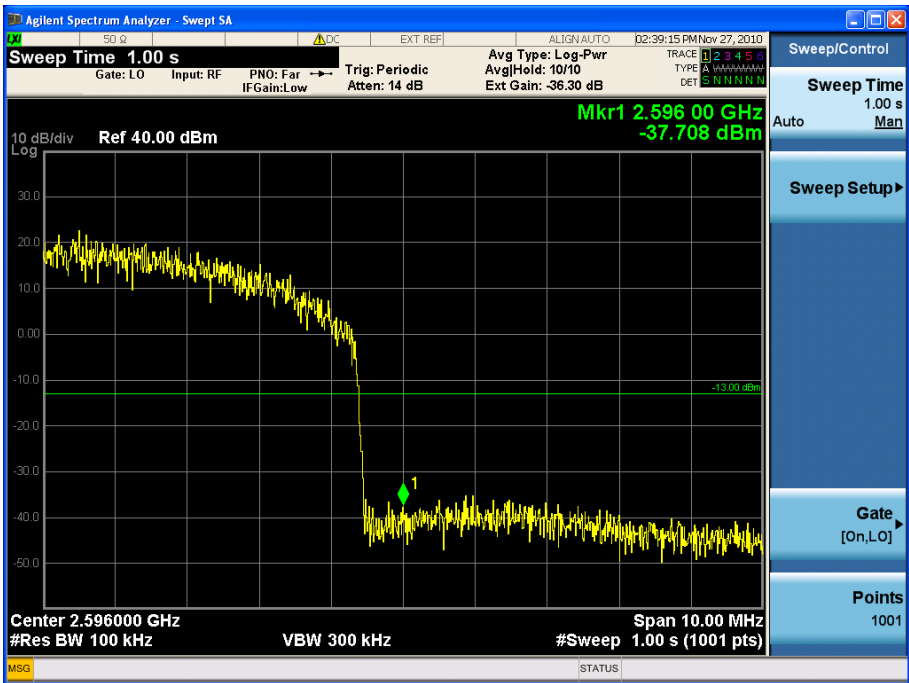


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 57 of 95

(16QAM Low Channel)

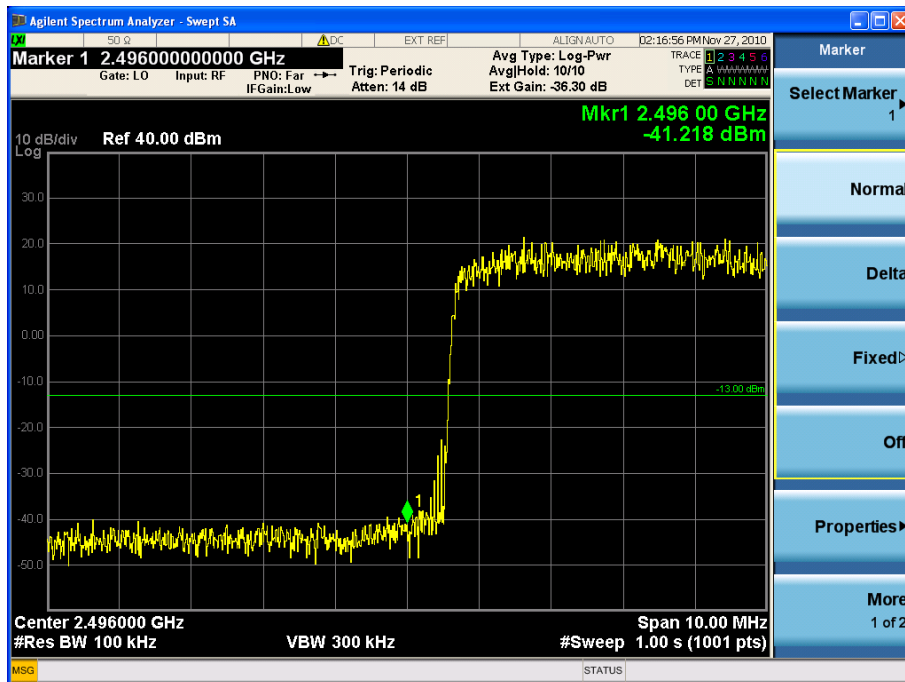


(16QAM High Channel)

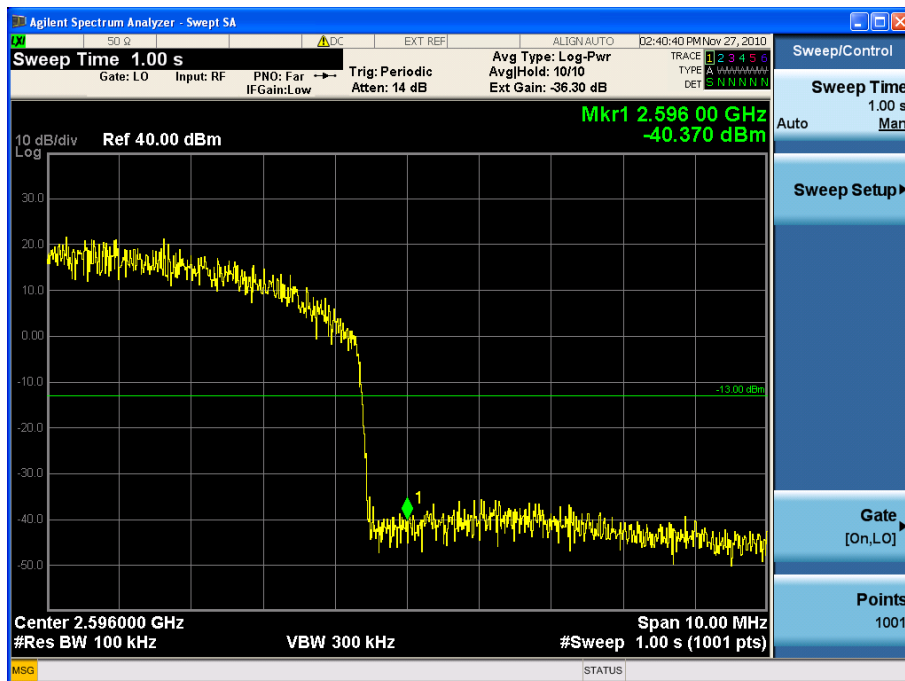


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 58 of 95

(64QAM Low Channel)

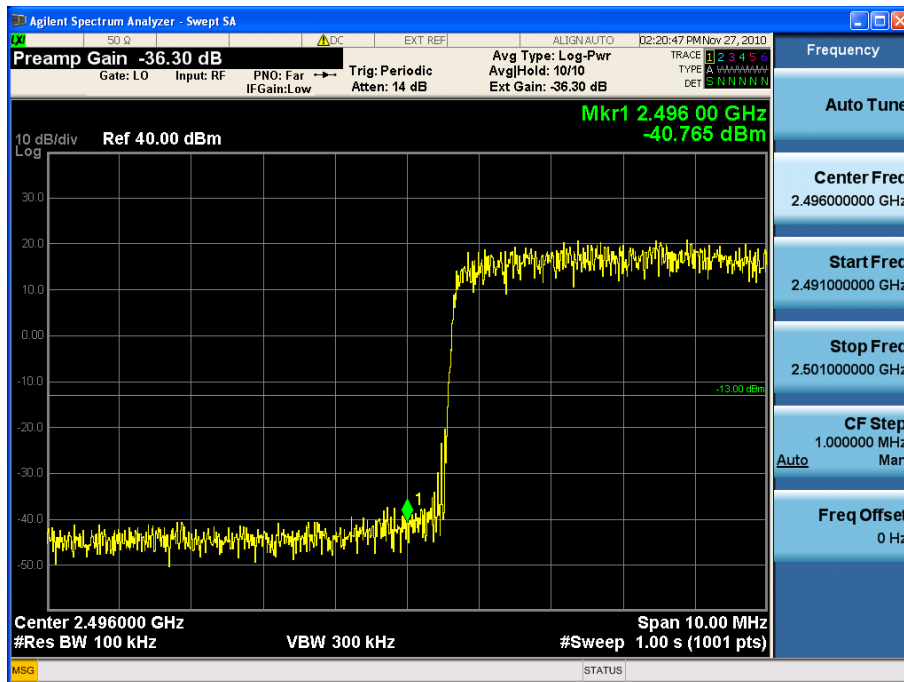

(64QAM High Channel)

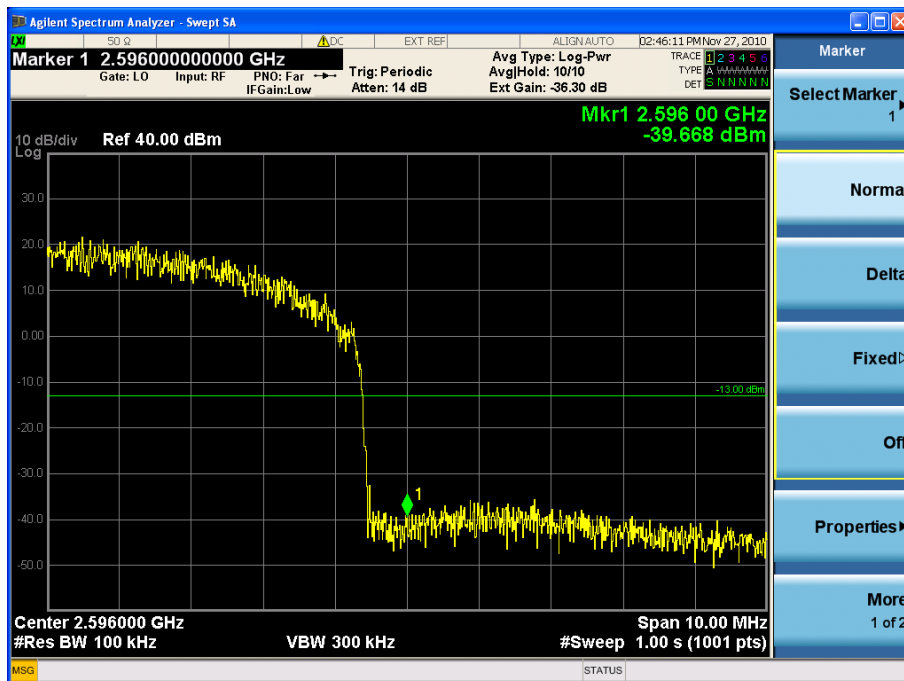

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 59 of 95

8. SPURIOUS EMISSION AT ANTENNA TERMINAL

8.1. Applicable Standard: CFR 47§2.1051, §27.53

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in §2.1051

8.2. Test Equipment List and Details

Manufacturer	Model / Equipment	Serial No.	Calibration Due
Agilent	6674A / DC Power Supply	3501A00901	05/14/2011
WEINSCHEL	67-30-33 / Attenuator	BU5347	01/06/2011
WEINSCHEL	67-30-33 / Attenuator	BR0530	01/14/2011
WEINSCHEL	AF117A-69-31 / STEP ATTENUATOR	11787	11/12/2011
WEINSCHEL	AF117A-69-31 / STEP ATTENUATOR	639	11/12/2011
Agilent	N9020A / MXA Signal Analyzer	US46220219	03/03/2011
Agilent	11636B / Power Divider	11377	12/24/2010

8.3. Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation.

The resolution bandwidth of the spectrum analyzer was set at 1MHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

The EUT provides the MIMO function which is able to transmit on the same channel with same data simultaneously therefore a combiner is used to sum the individual transmitter output power.

The test data is shown as a combined output in the report.

8.3.1 Environmental Conditions:


Temperature:	25 °C
Relative Humidity:	26 %

8.4. Test Result

: Pass


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 60 of 95

8.4.1. Plot Data at Output Port 1
(QPSK Low Channel)

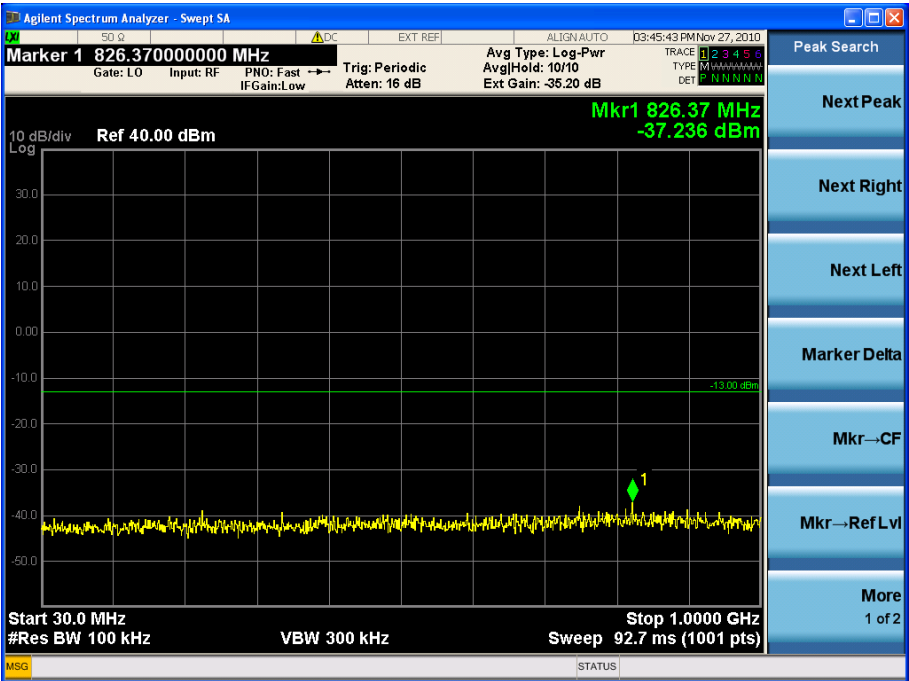

(30 MHz ~ 1 GHz)


(QPSK Middle Channel)

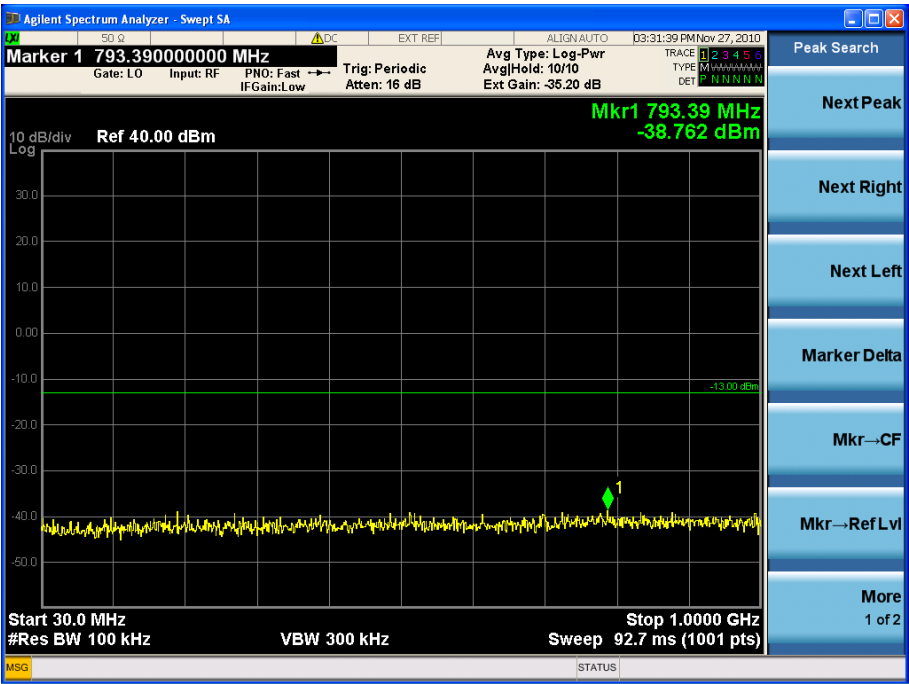

(30 MHz ~ 1 GHz)

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 61 of 95

(QPSK High Channel)

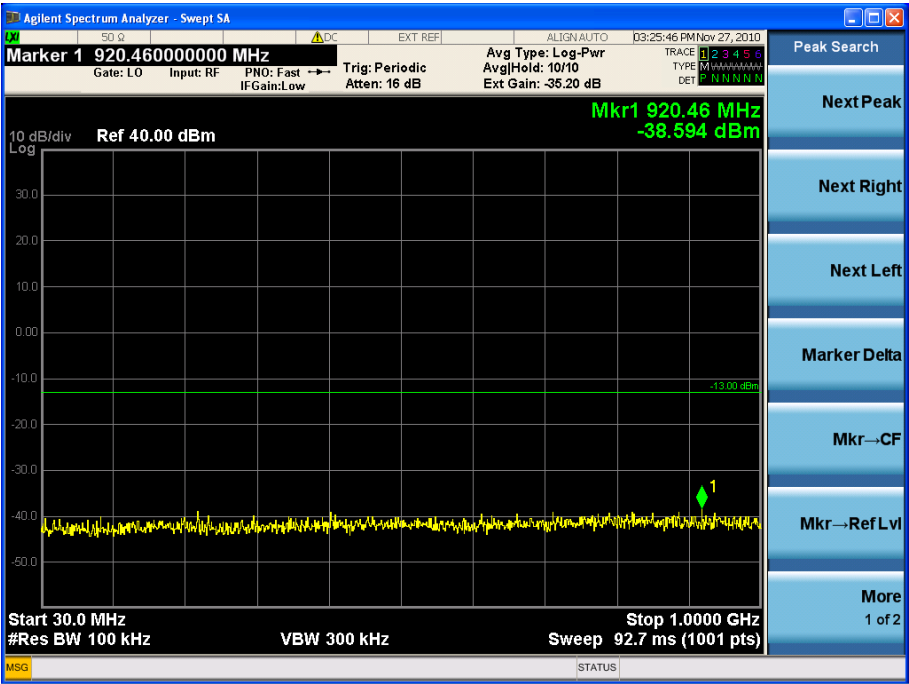

(30 MHz ~ 1 GHz)


(QPSK Low Channel)



(1 GHz ~ 26.5 GHz)

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 62 of 95

(QPSK Middle Channel)

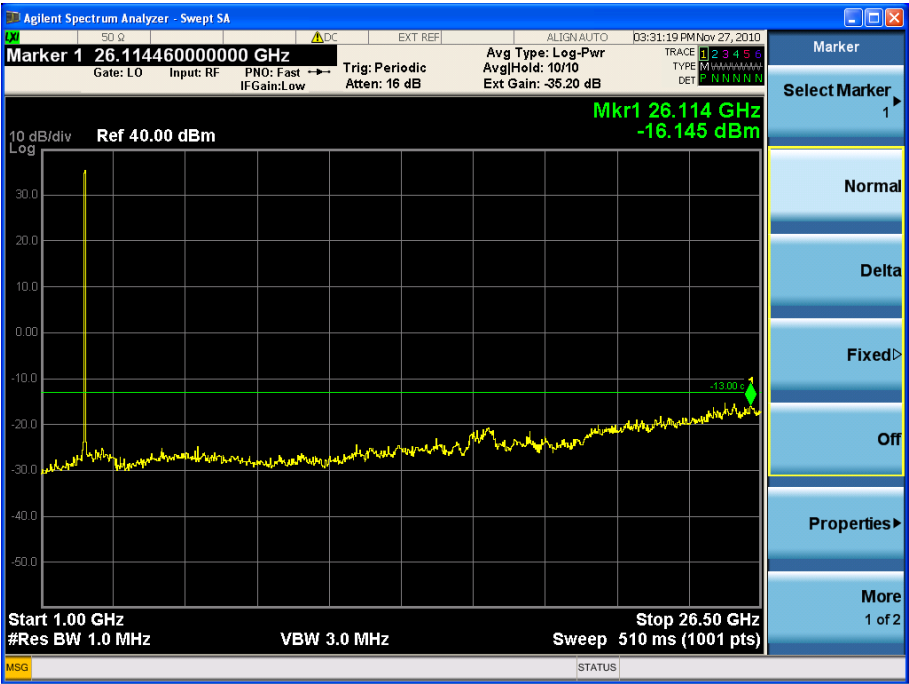

(1 GHz ~ 26.5 GHz)


(QPSK High Channel)



(1 GHz ~ 26.5 GHz)


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 63 of 95

(16QAM LOW Channel)

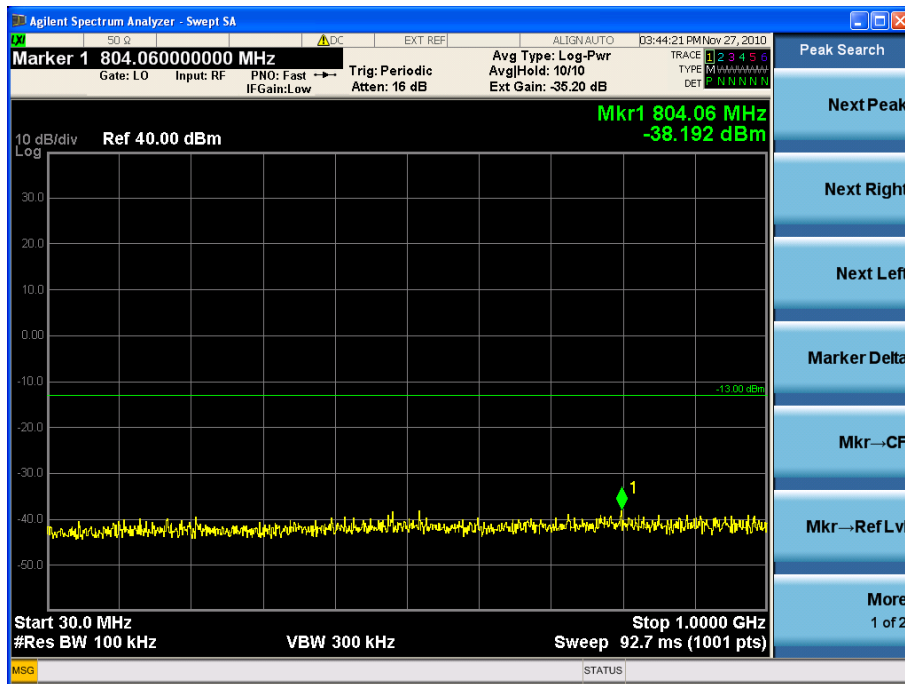

(30 MHz ~ 1 GHz)


(16QAM Middle Channel)

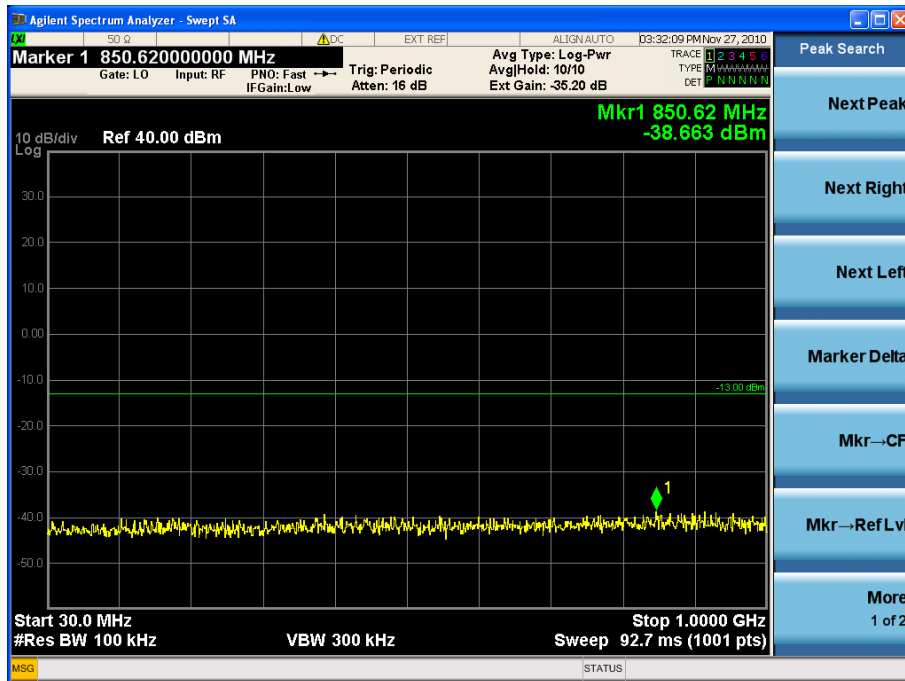

(30 MHz ~ 1 GHz)

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 64 of 95

(16QAM High Channel)

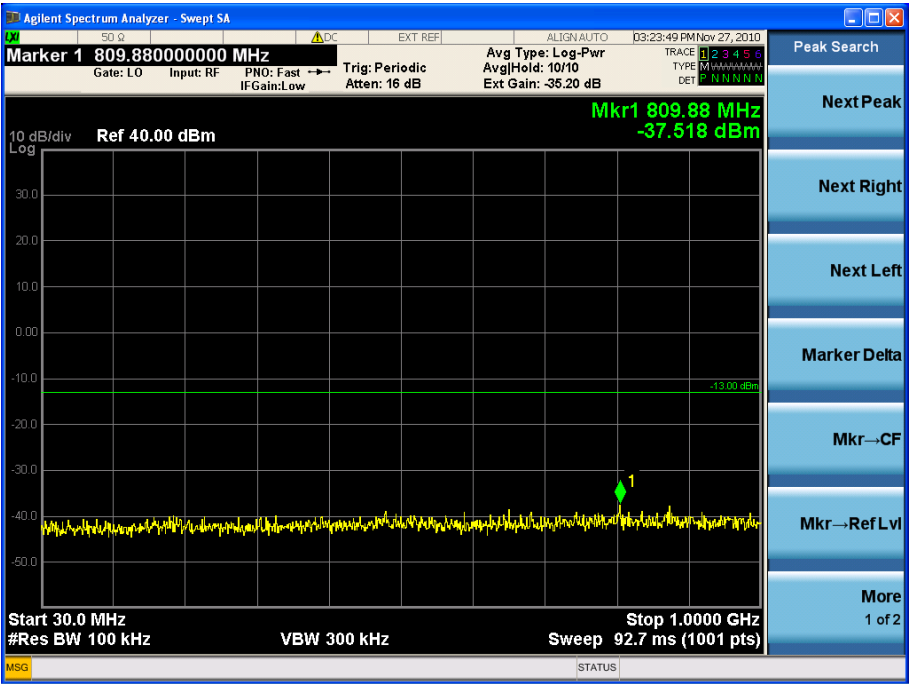

(30 MHz ~ 1 GHz)

(16QAM LOW Channel)



(1 GHz ~ 26.5 GHz)


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 65 of 95

(16QAM Middle Channel)



(1 GHz ~ 26.5 GHz)


(16QAM High Channel)

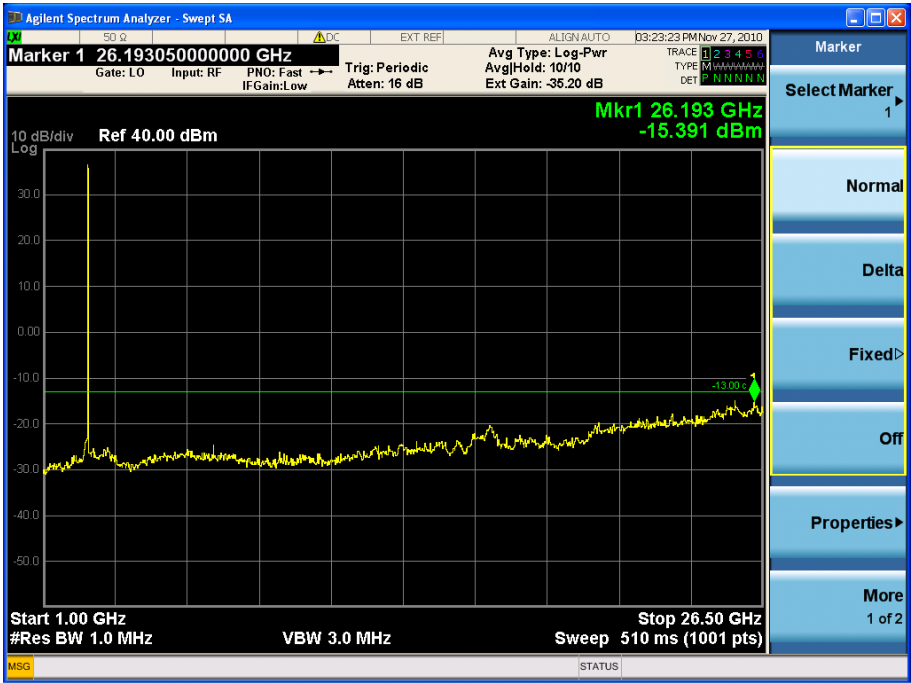

(1 GHz ~ 26.5 GHz)


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 66 of 95

(64QAM Low Channel)

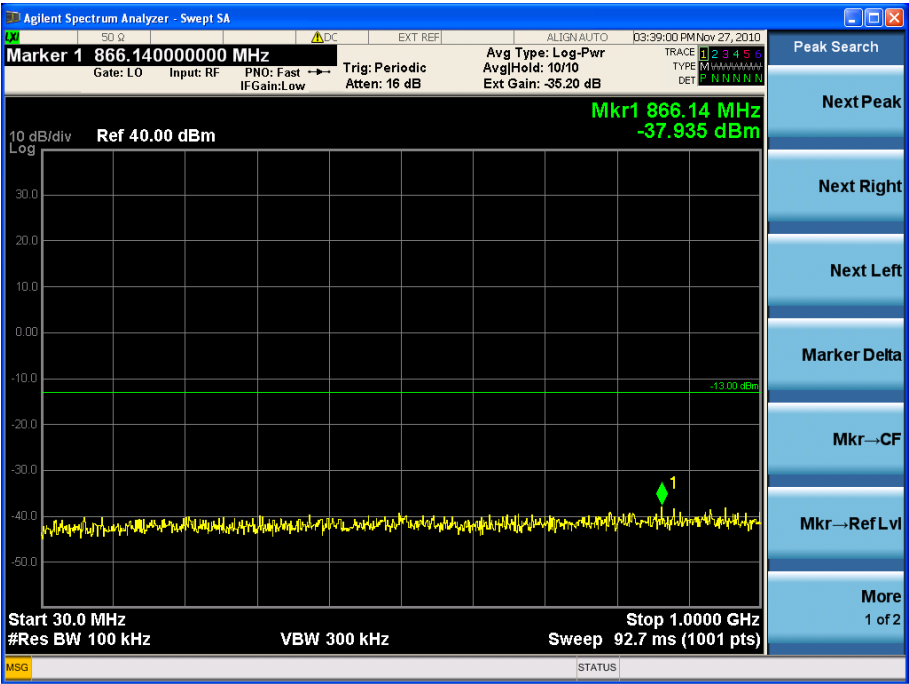

(30 MHz ~ 1 GHz)


(64QAM Middle Channel)

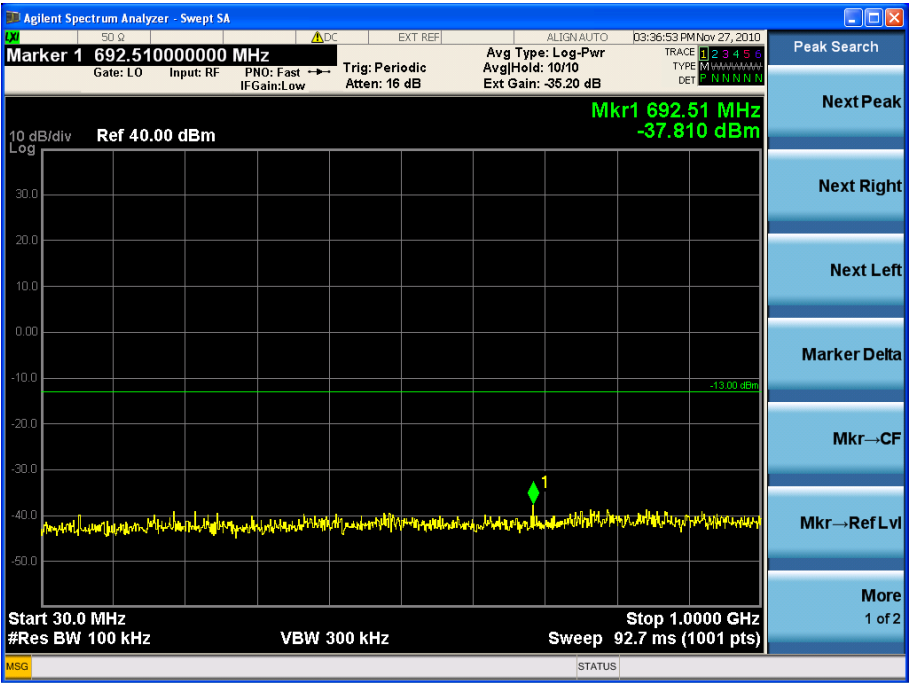

(30 MHz ~ 1 GHz)


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 67 of 95

(64QAM High Channel)

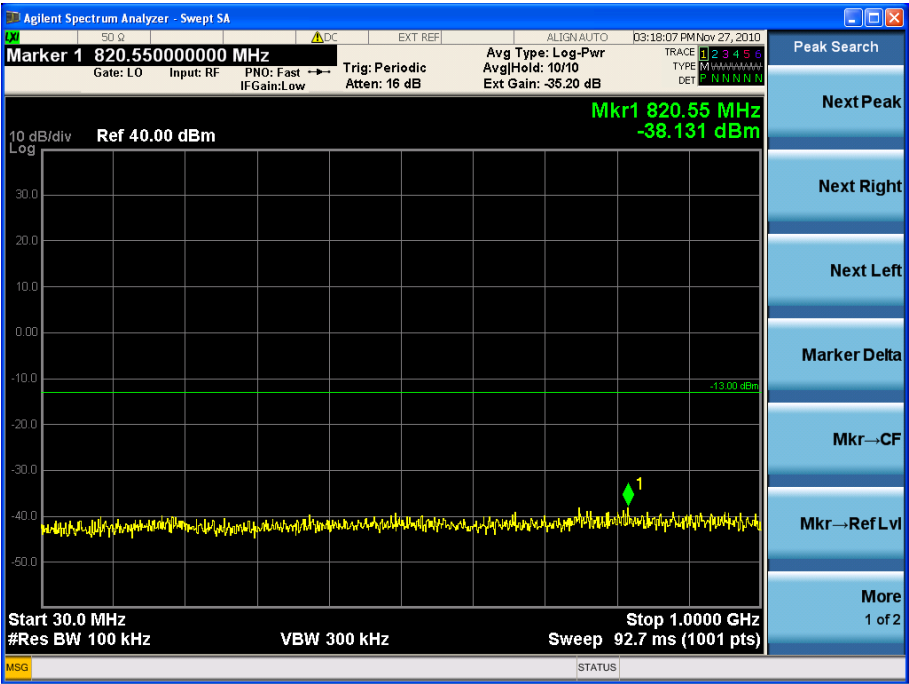

(30 MHz ~ 1 GHz)

(64QAM Low Channel)

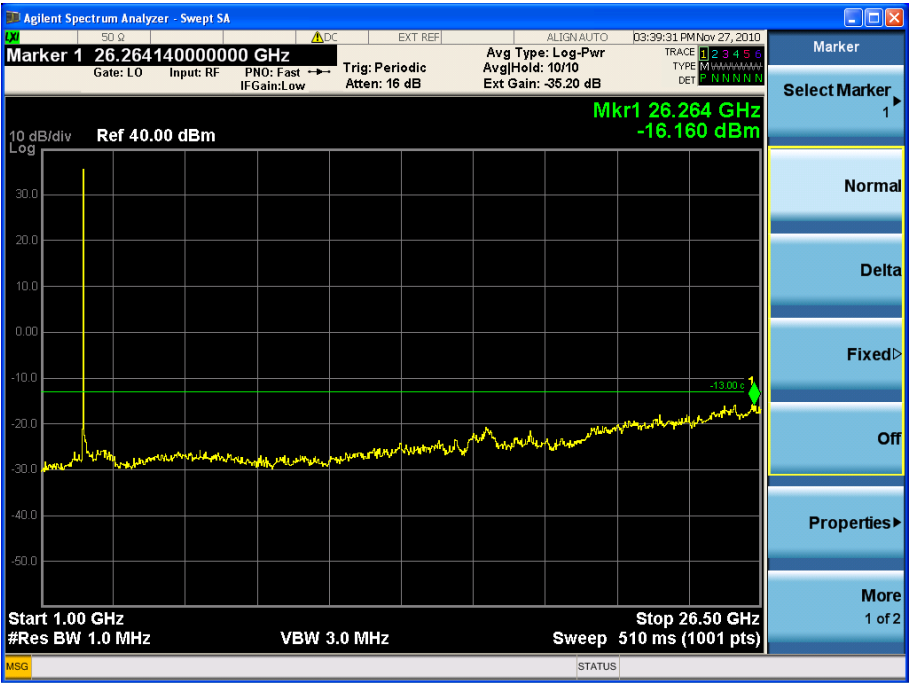

(1 GHz ~ 26.5 GHz)

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 68 of 95

(64QAM Middle Channel)



(1 GHz ~ 26.5 GHz)


(64QAM High Channel)



(1 GHz ~ 26.5 GHz)


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 69 of 95

8.4.2. Plot Data at Output Port 2
(QPSK Low Channel)

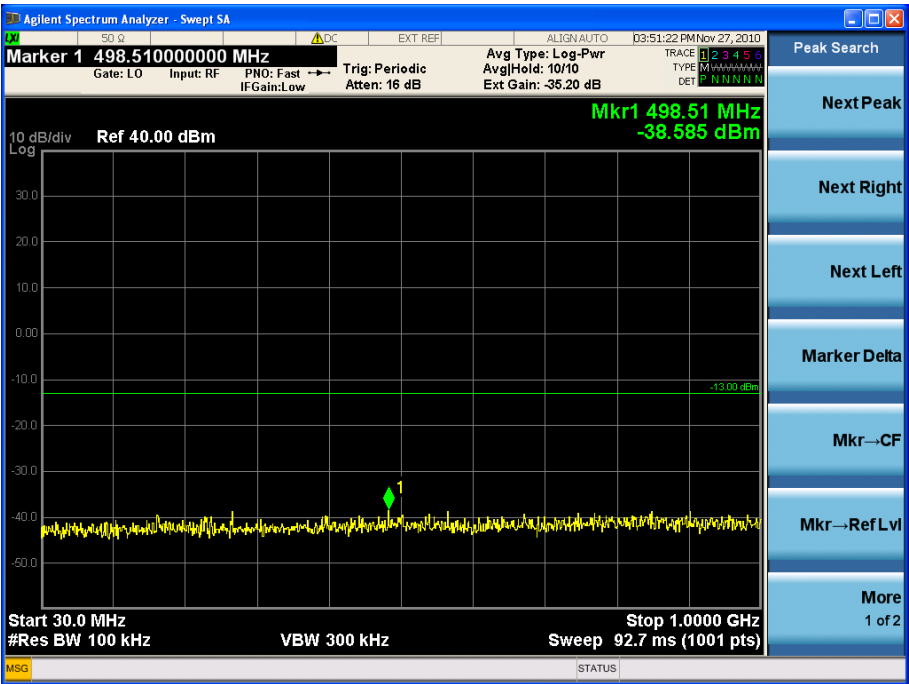

(30 MHz ~ 1 GHz)


(QPSK Middle Channel)

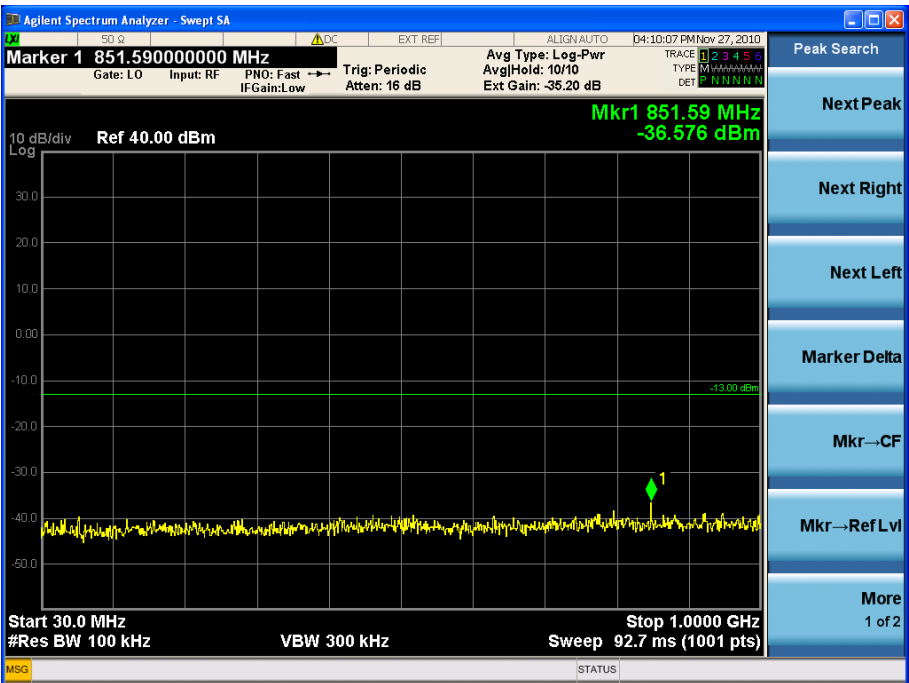

(30 MHz ~ 1 GHz)


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 70 of 95

(QPSK High Channel)

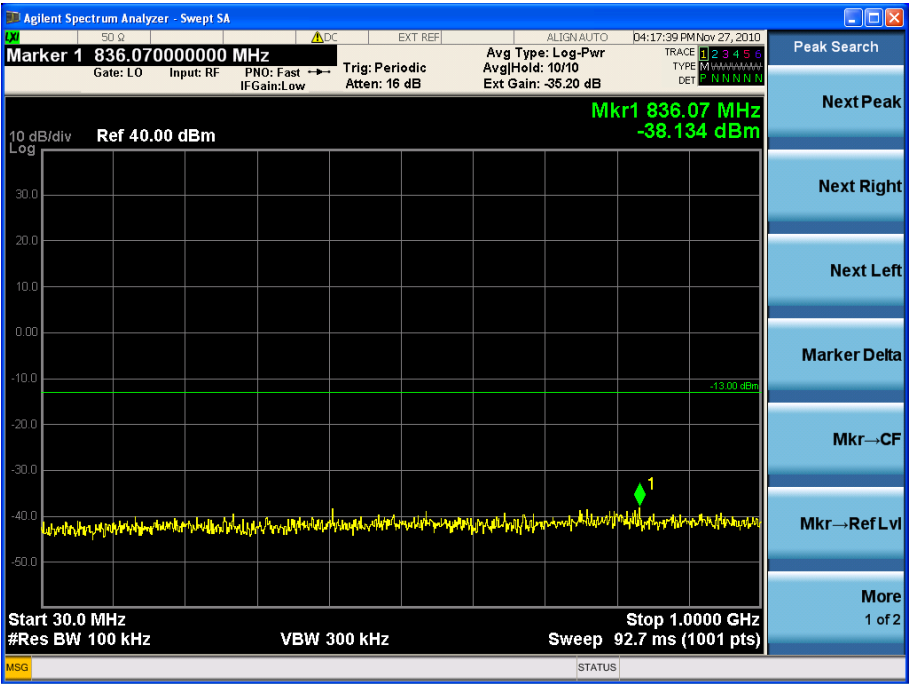

(30 MHz ~ 1 GHz)

(QPSK Low Channel)

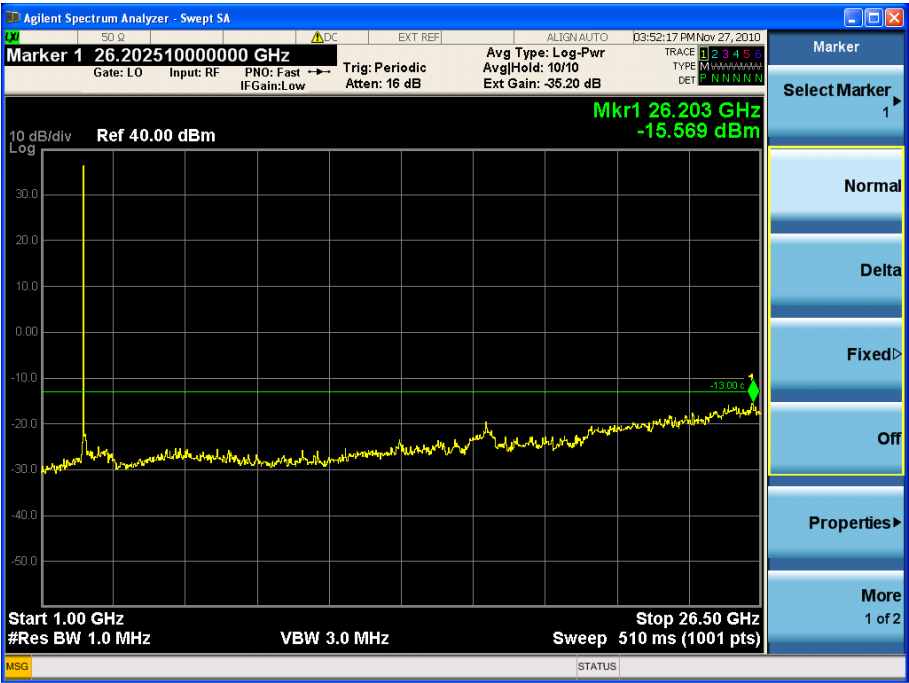

(1 GHz ~ 26.5 GHz)

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 71 of 95

(QPSK Middle Channel)



(1 GHz ~ 26.5 GHz)


(QPSK High Channel)



(1 GHz ~ 26.5 GHz)


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 72 of 95

(16QAM LOW Channel)

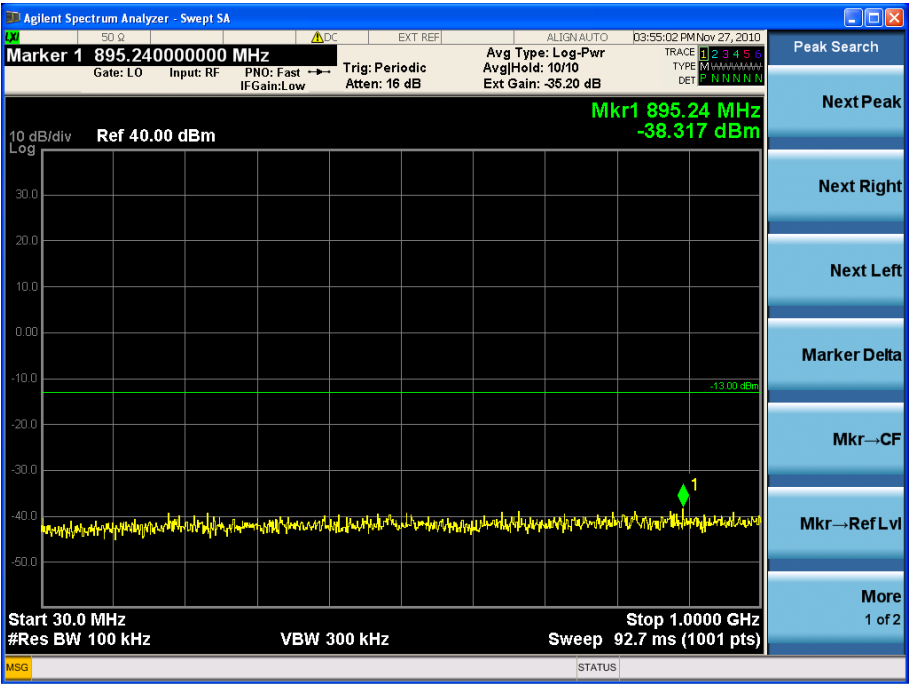

(30 MHz ~ 1 GHz)


(16QAM Middle Channel)

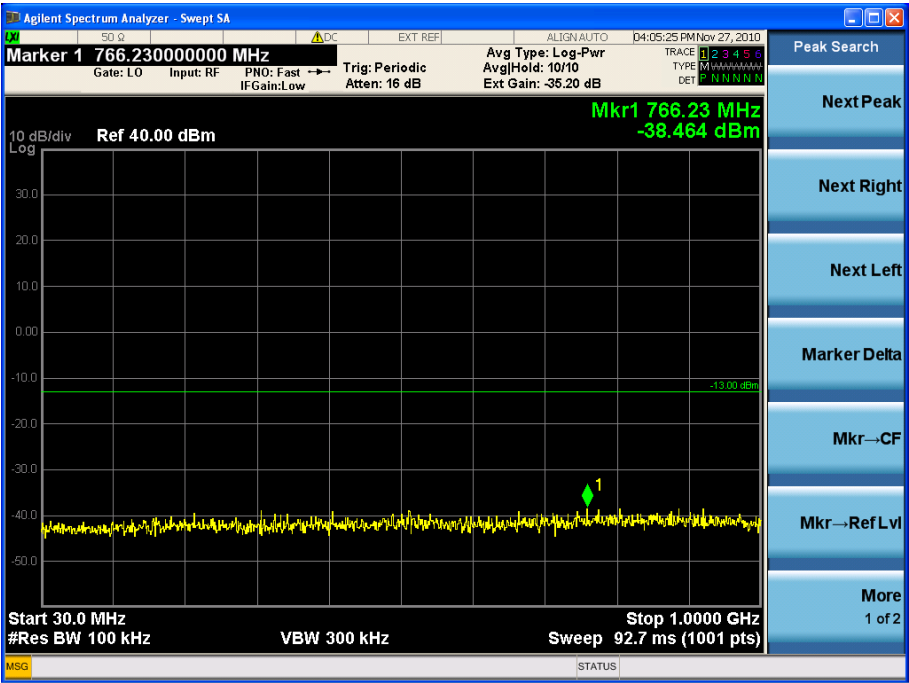

(30 MHz ~ 1 GHz)


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 73 of 95

(16QAM High Channel)

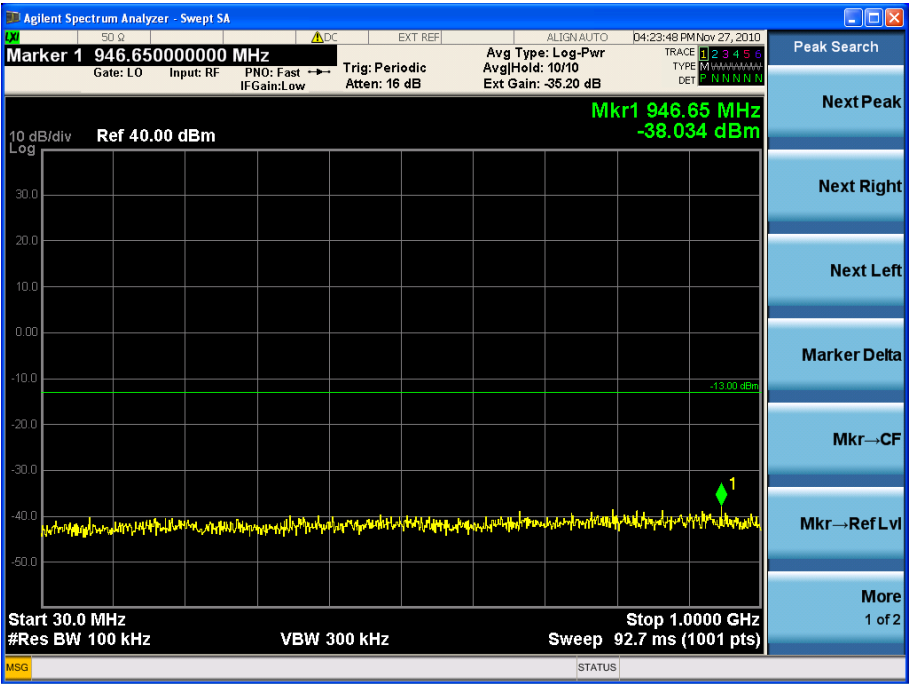

(30 MHz ~ 1 GHz)


(16QAM LOW Channel)

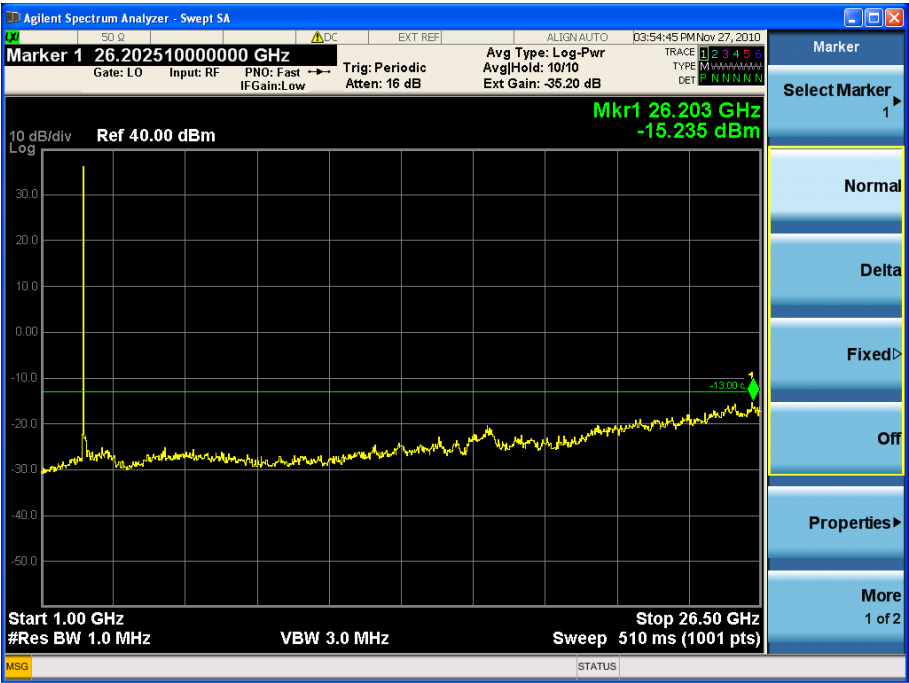

(1 GHz ~ 26.5 GHz)

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 74 of 95

(16QAM Middle Channel)

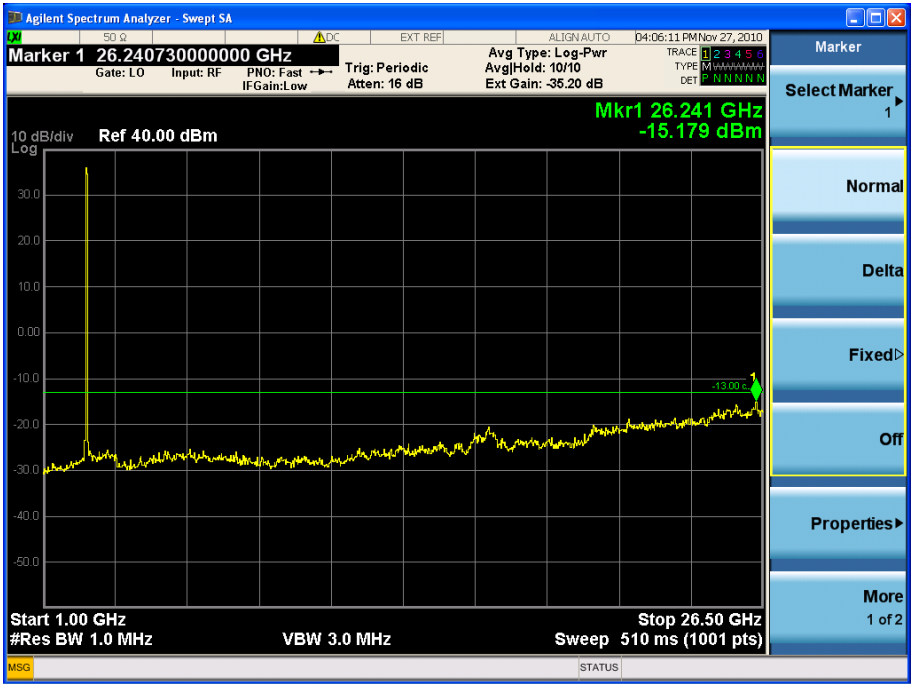

(1 GHz ~ 26.5 GHz)


(16QAM High Channel)



(1 GHz ~ 26.5 GHz)


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 75 of 95

(64QAM Low Channel)

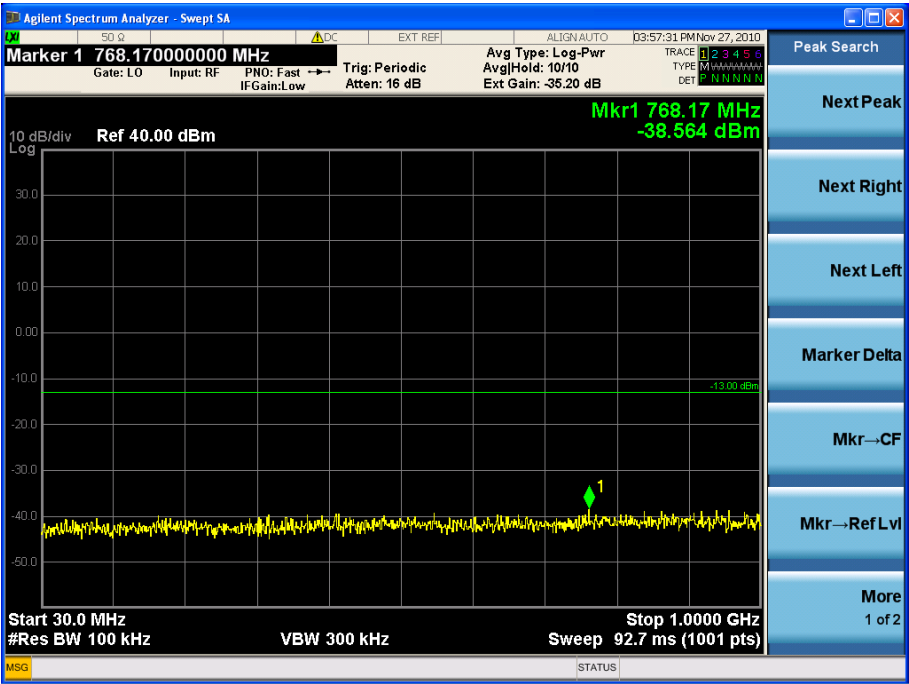

(30 MHz ~ 1 GHz)


(64QAM Middle Channel)

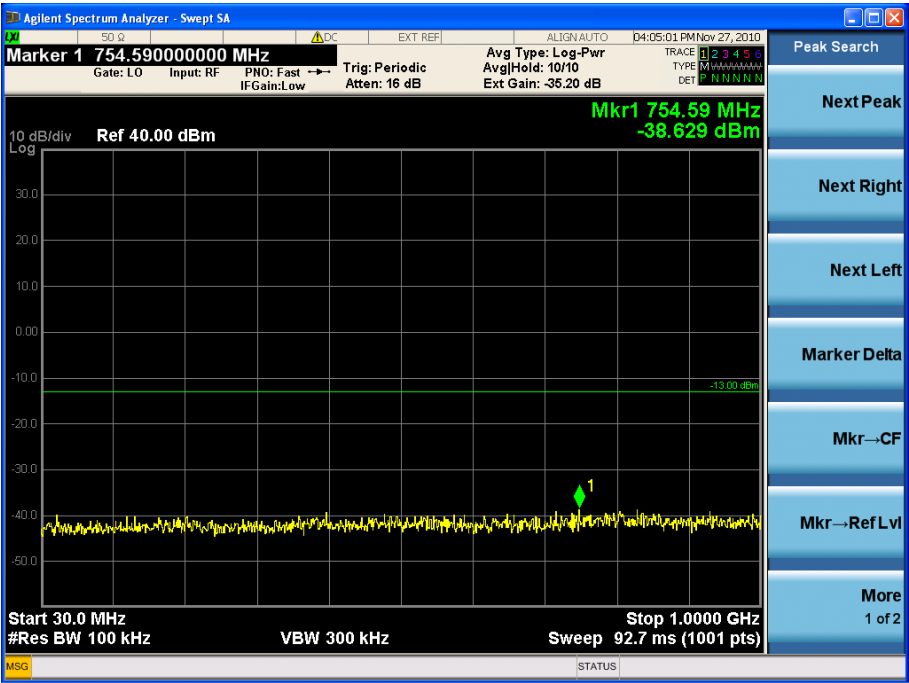

(30 MHz ~ 1 GHz)


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 76 of 95

(64QAM High Channel)

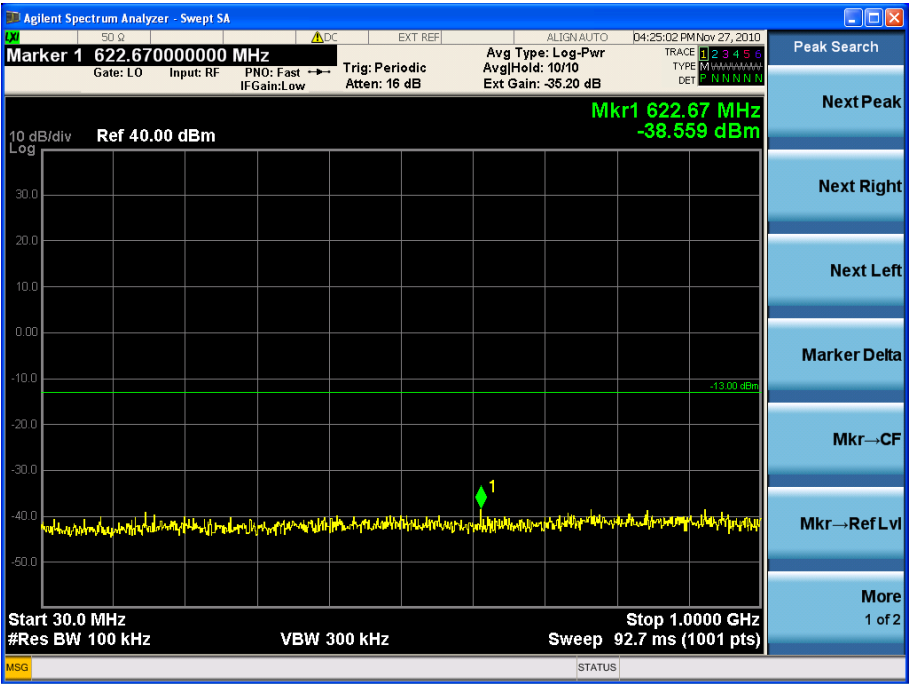

(30 MHz ~ 1 GHz)


(64QAM Low Channel)

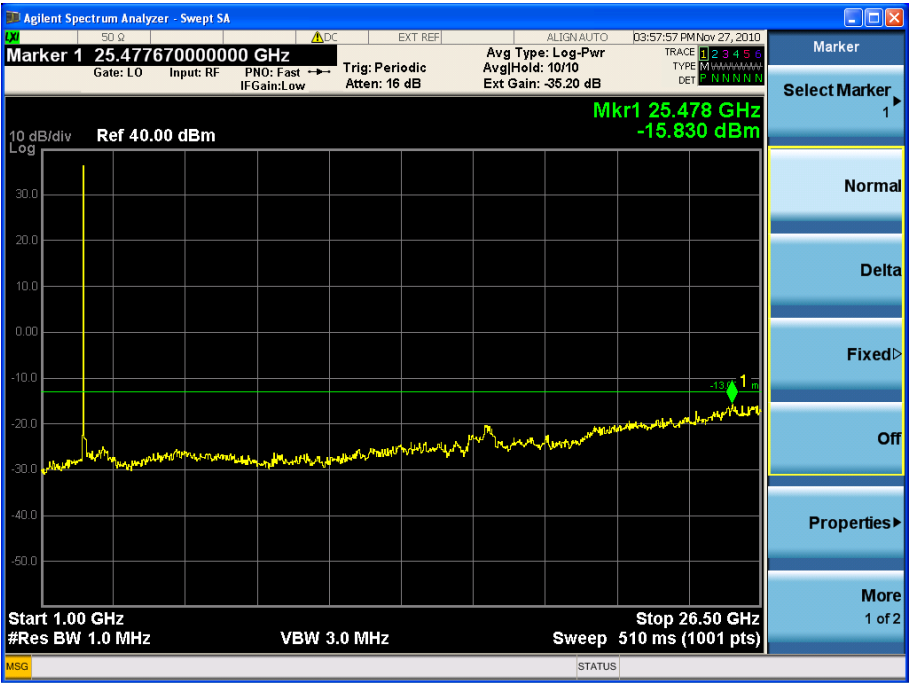

(1 GHz ~ 26.5 GHz)


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 77 of 95

(64QAM Middle Channel)

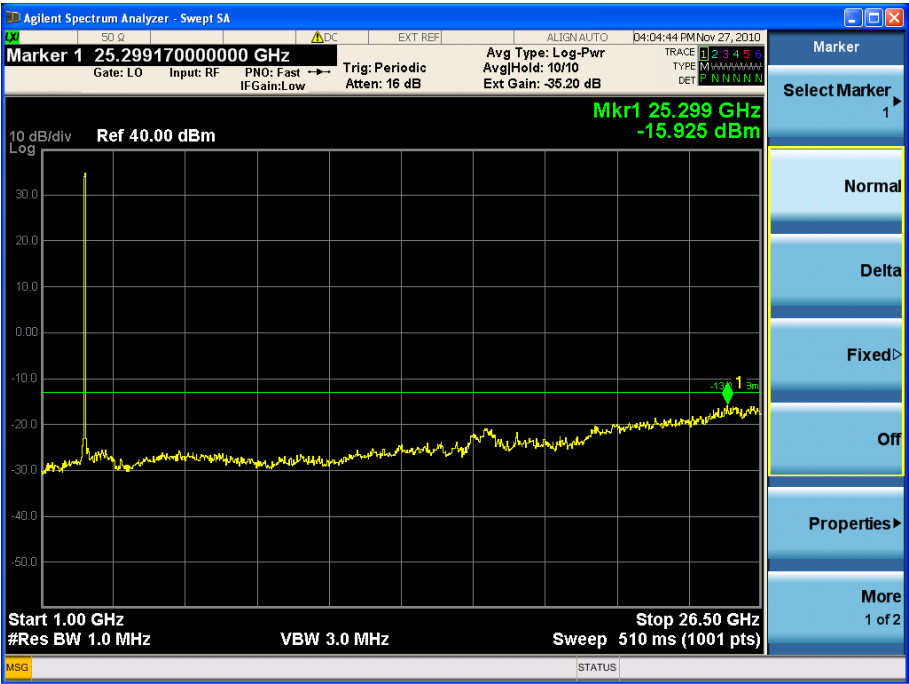

(1 GHz ~ 26.5 GHz)


(64QAM High Channel)

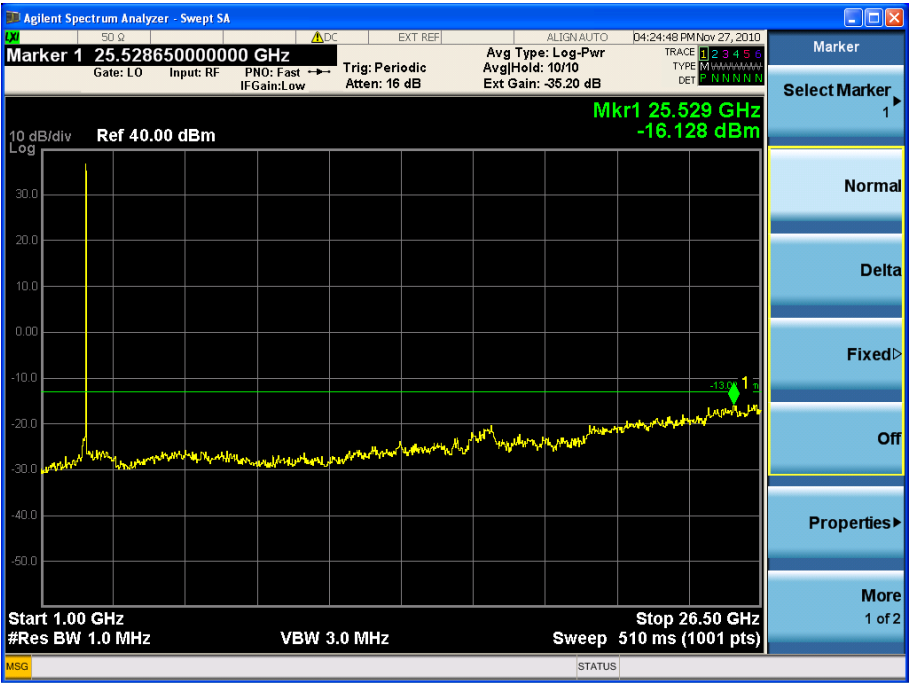

(1 GHz ~ 26.5 GHz)


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 78 of 95

8.4.3. Combined Plot Data at Output
(QPSK Low Channel)

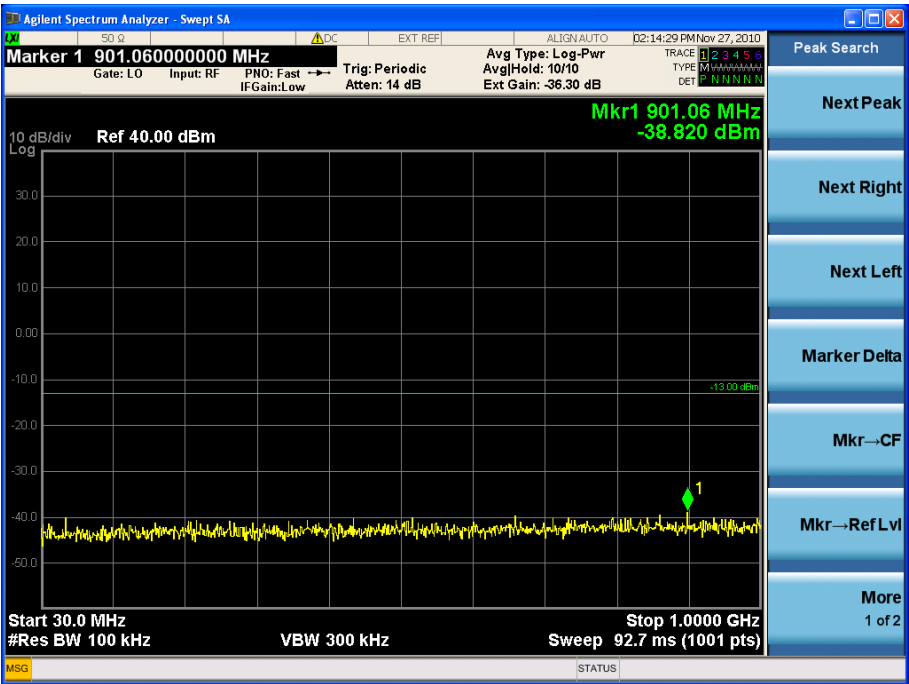

(30 MHz ~ 1 GHz)


(QPSK Middle Channel)

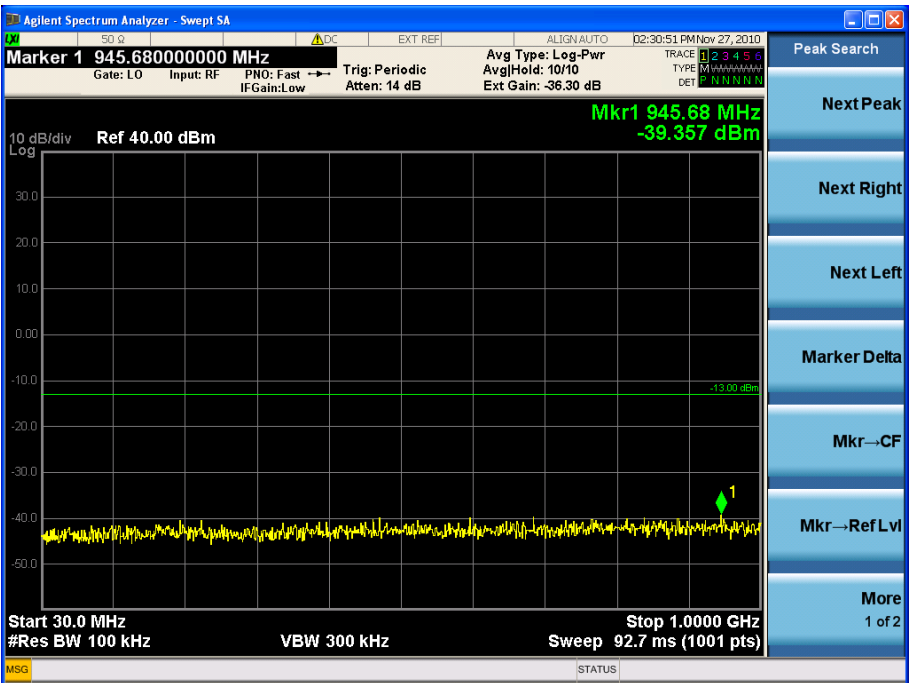

(30 MHz ~ 1 GHz)


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 79 of 95

(QPSK High Channel)

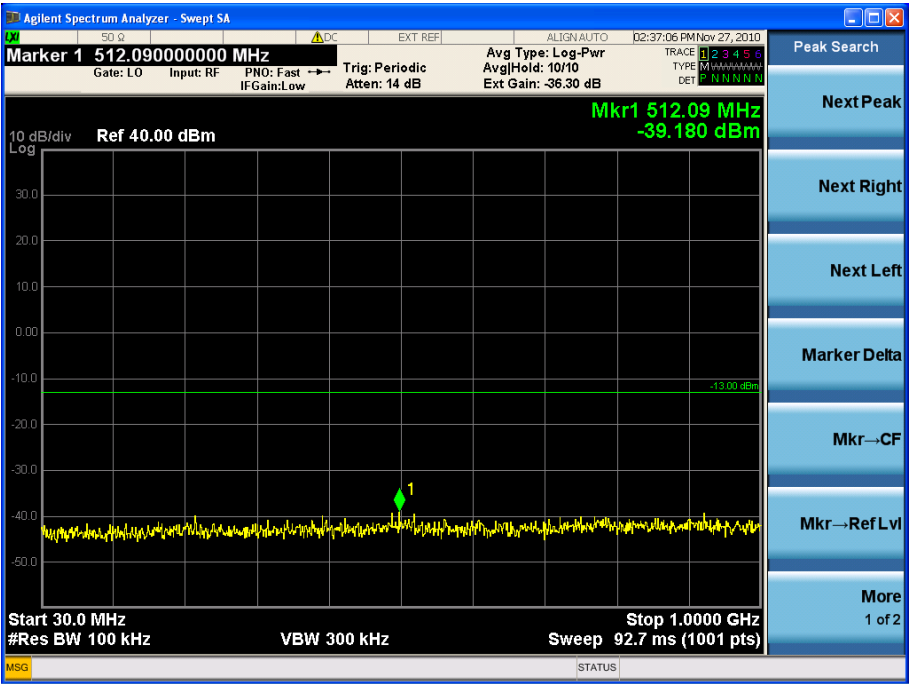

(30 MHz ~ 1 GHz)

(QPSK Low Channel)

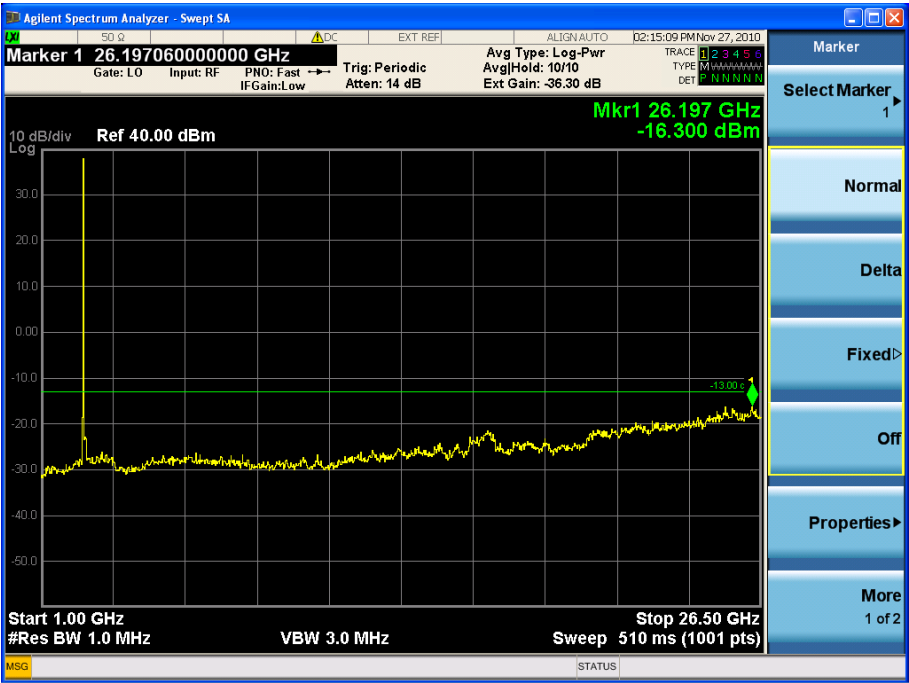

(1 GHz ~ 26.5 GHz)

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 80 of 95

(QPSK Middle Channel)



(1 GHz ~ 26.5 GHz)


(QPSK High Channel)



(1 GHz ~ 26.5 GHz)


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 81 of 95

(16QAM LOW Channel)

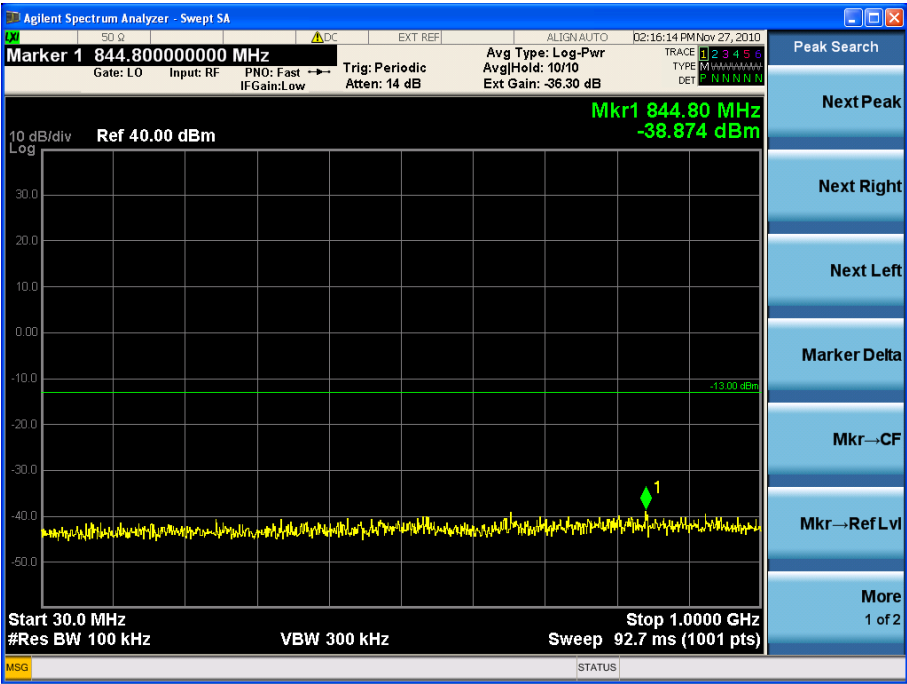

(30 MHz ~ 1 GHz)


(16QAM Middle Channel)

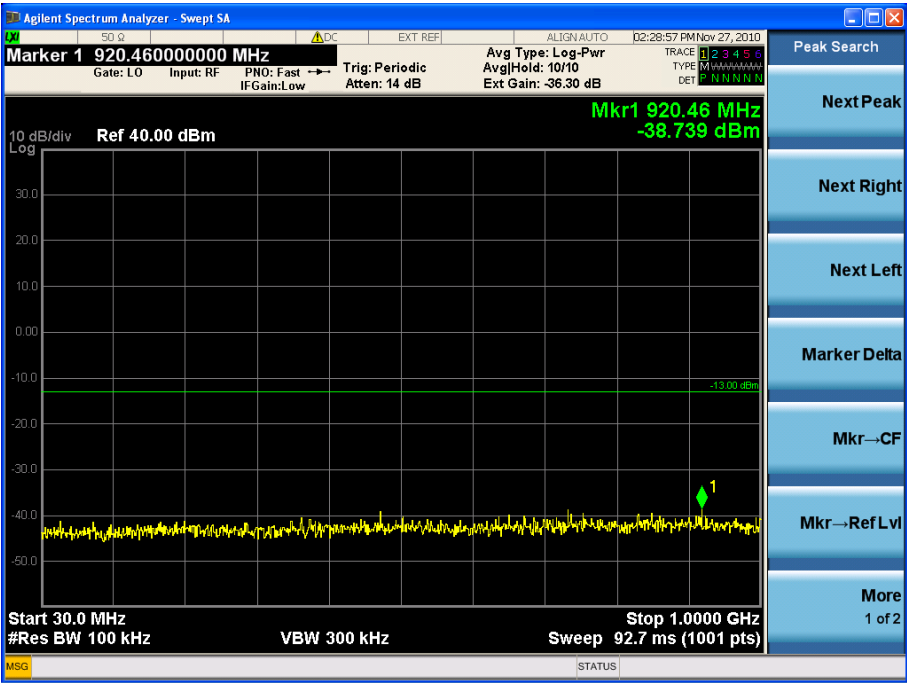

(30 MHz ~ 1 GHz)

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 82 of 95

(16QAM High Channel)

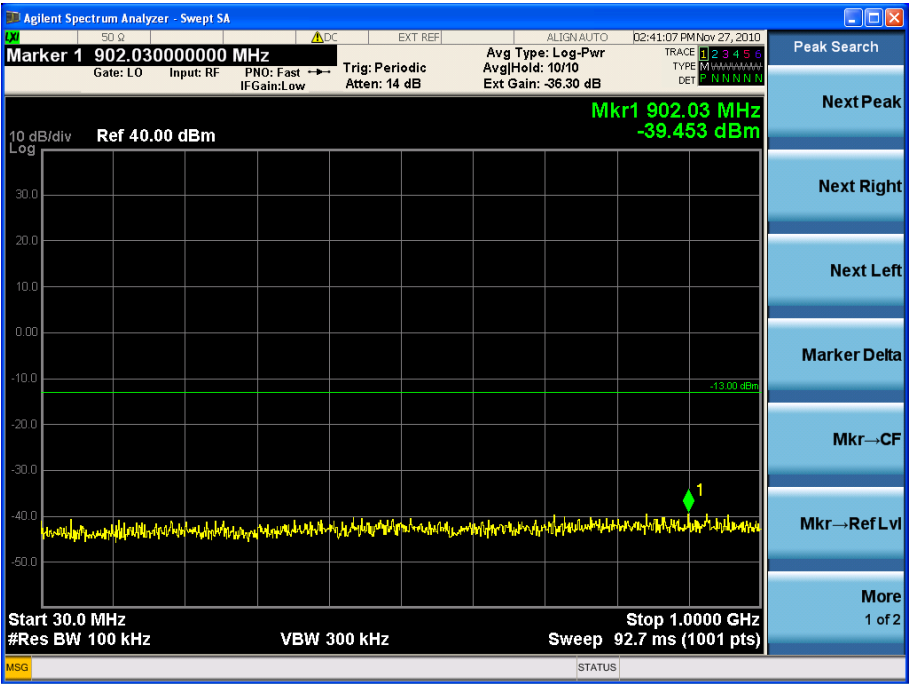

(30 MHz ~ 1 GHz)


(16QAM LOW Channel)



(1 GHz ~ 26.5 GHz)

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 83 of 95

(16QAM Middle Channel)

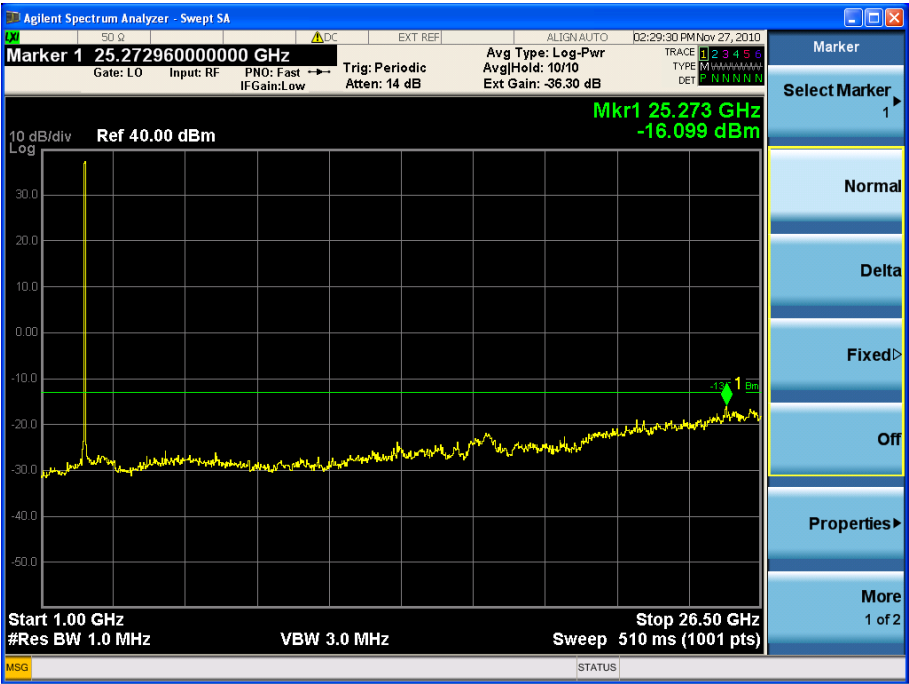

(1 GHz ~ 26.5 GHz)


(16QAM High Channel)



(1 GHz ~ 26.5 GHz)


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 84 of 95

(64QAM Low Channel)

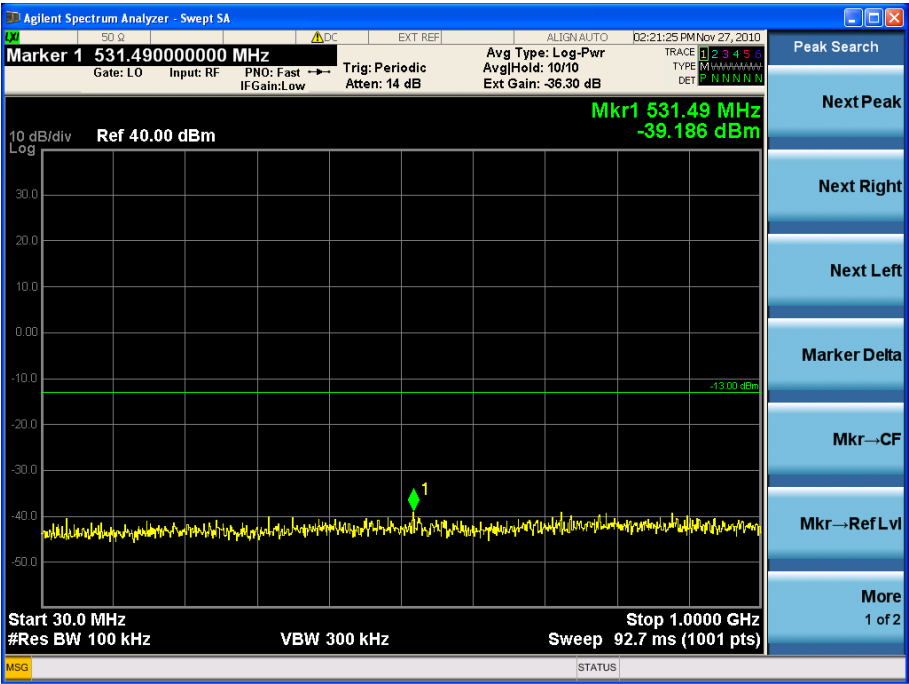

(30 MHz ~ 1 GHz)


(64QAM Middle Channel)

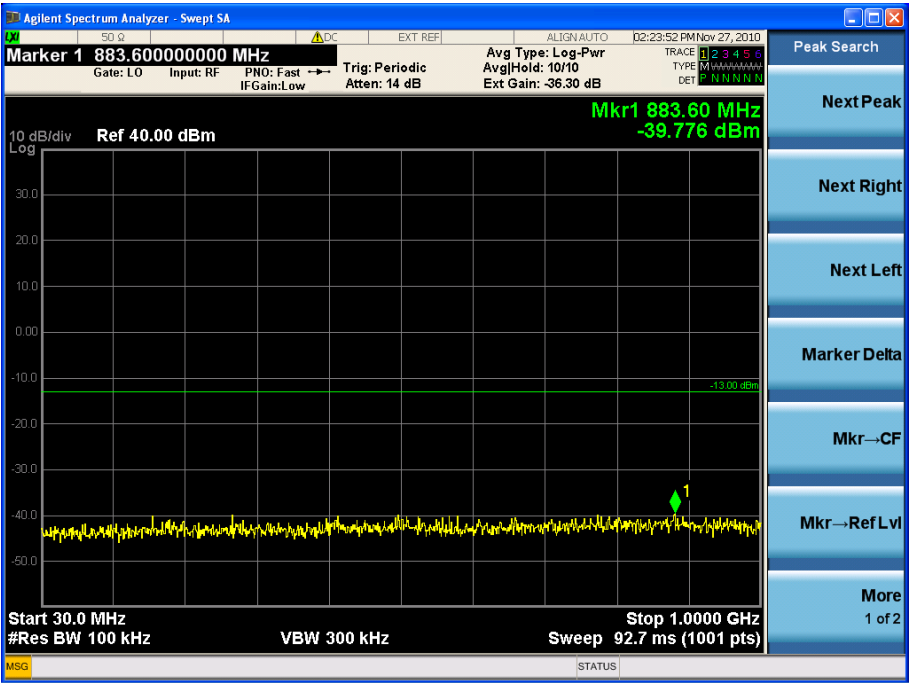

(30 MHz ~ 1 GHz)


FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 85 of 95

(64QAM High Channel)

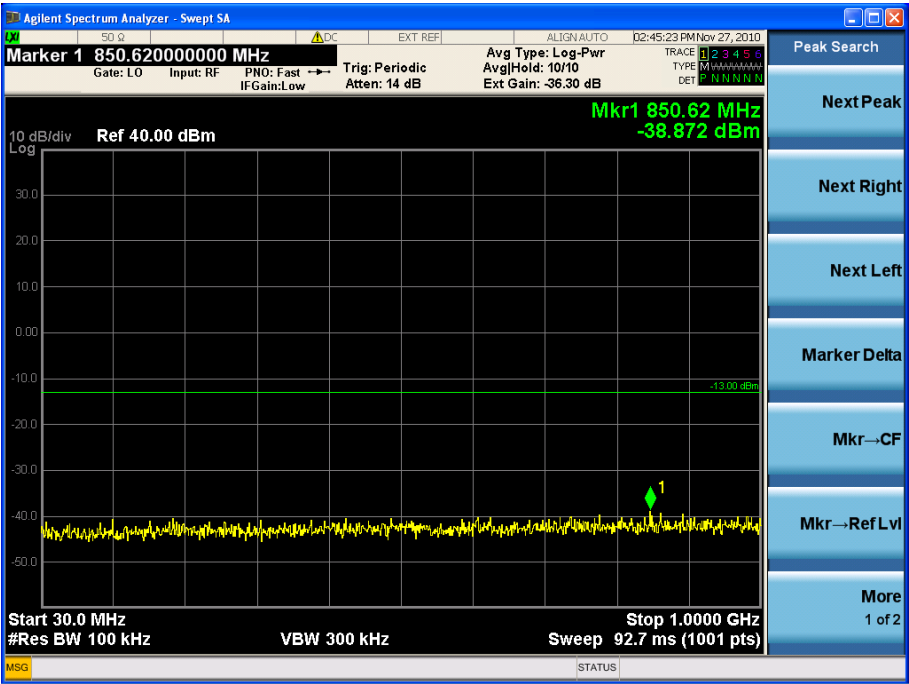

(30 MHz ~ 1 GHz)

(64QAM Low Channel)

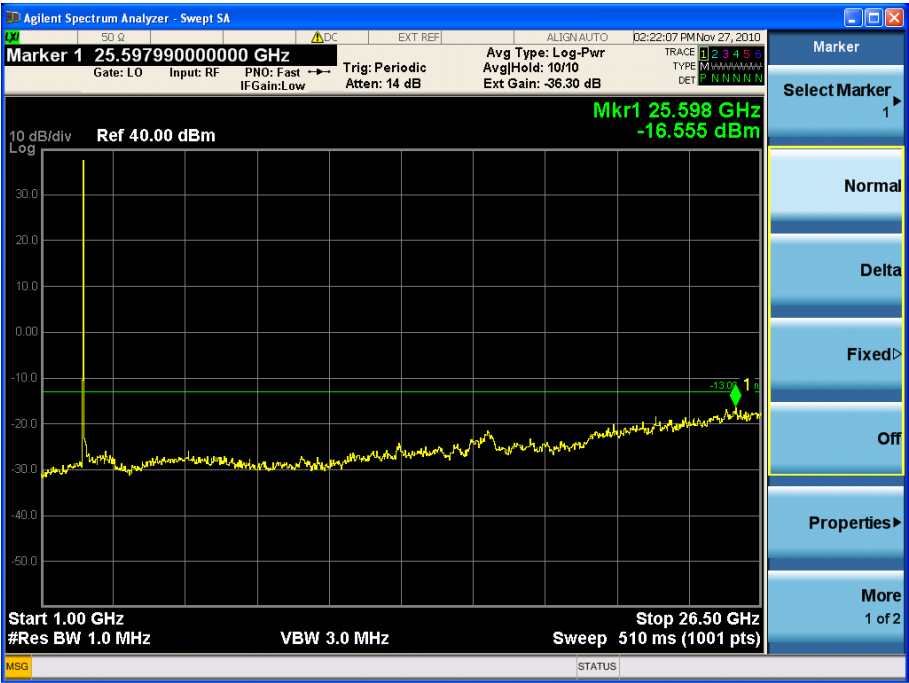

(1 GHz ~ 26.5 GHz)

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 86 of 95

(64QAM Middle Channel)



(1 GHz ~ 26.5 GHz)

(64QAM High Channel)



(1 GHz ~ 26.5 GHz)

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 87 of 95

9. RADIATED SPURIOUS EMISSION

9.1 Applicable Standard

(1) For BRS and EBS stations, the power of any emissions outside the licensee's frequency bands of operation shall be attenuated below the transmitter power (P) measured in watts. (2) For fixed and temporary fixed digital stations, the attenuation shall be not less than $43 + 10 \log (P)$ dB, unless a documented interference complaint is received from an adjacent channel licensee. Provided that the complaint cannot be mutually resolved between the parties, both licensees of existing and new systems shall reduce their out-of-band emissions by at least $67 + 10 \log (P)$ dB measured at 3 MHz from their channel's edges for distances between stations exceeding 1.5 km.

9.2 Test Equipment List and Details

Manufacturer	Model / Equipment	Serial No.	Calibration Due
Schwarzbeck	BBHA 9120D /Double Ridged Horn Antenna	296	09/23/2011
Schwarzbeck	BBHA 9120D /Double Ridged Horn Antenna	147	04/13/2011
Schwarzbeck	VULB 9168/ TRILOG Antenna	9168-200	01/06/2011
HD	MA240/ Antenna Position Tower	556	N/A
EMCO	1050/ Turn Table	114	N/A
HD GmbH	HD 100/ Controller	13	N/A
HD GmbH	KMS 560/ SlideBar	12	N/A
MITEQ	AFS44-00102650-42-10P44-PS	1532439	04/05/2011
EMCO	6502/Loop Antenna	9009-2536	01/13/2012
R&S	ESI40 / EMI TEST Receiver	831564/003	10/30/2011

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 88 of 95

9.3 Test Procedure


Radiated emission measurements were performed at an semi-anechoic chamber.

The EUT was set at a distance of 3m from the receiving antenna. The EUT's RF ports were terminated to 50ohm load. The EUT was set to transmit at the low, mid and high channels of the transmitter frequency range at its maximum power level. The EUT was rotated about 360° and the receiving antenna scanned from 1-4m in order to capture the maximum emission.

A calibrated antenna source was positioned in place of the EUT and the previously recorded signal was duplicated.

The maximum EIRP of the emission was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and horizontal polarization. Harmonic emissions up to the 10th or 40GHz, whichever was the lesser, were investigated.

9.3.1 Radiated Spurious Emissions Test Setup

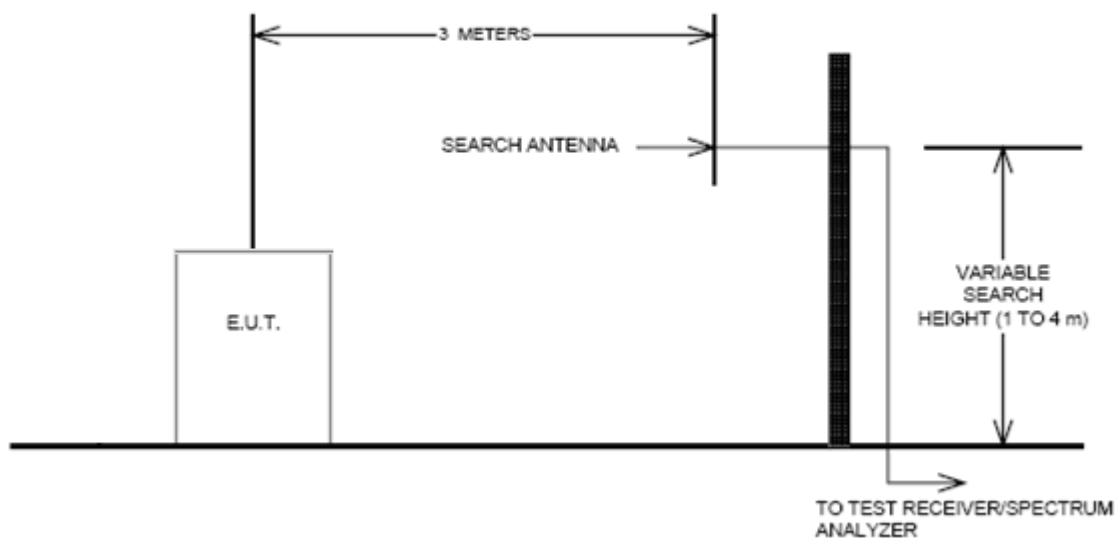

9.3.2 Environmental Conditions:

Temperature:	26 °C
Relative Humidity:	27 %

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 89 of 95

9.4 Test Result

: PASS (There were no emissions detected above the noise floor which was at least 20 dB below the limit.)

Frequency	Freq.(MHz)	<u>Substitute Level</u> [dBm]	Ant. Gain (dBd)	C.L	Pol.	ERP (dBm)	Margin (dB)
2499.0	4998.0	-48.4	10.34	4.38	H	-42.44	-29.44
	7497.0	-47.8	9.69	6.04	H	-42.15	-29.15

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 90 of 95

10. FREQUENCY STABILITY

10.1 Applicable Standard

Requirements: FCC § 2.1055 (a), Part 27.54 following: The frequency stability shall be sufficient to ensure that the fundamental emissions stay

10.2 Test Equipment List and Details

Manufacturer	Model / Equipment	Serial No.	Calibration Due
Agilent	6674A / DC Power Supply	3501A00901	05/14/2011
WEINSCHEL	67-30-33 / Attenuator	BR0530	01/14/2011
Agilent	N9020A / MXA Signal Analyzer	US46220219	03/03/2011

10.3 Test Procedure

Frequency Stability over Temperature variation:

The equipment under test was connected to an external DC power supply and the RF output was connected to a Spectrum Analyzer via feed-through attenuators. The EUT was placed inside the temperature chamber. RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 30 minutes, the frequency output was recorded from the VSA8960 S/W via MXA Signal Analyzer.

Frequency stability over Voltage variation: An external variable DC power supply Source. The voltage was set to 85% and 115% of the nominal value. The output frequency was recorded for each voltage.

10.3.1. Environmental conditions

Temperature:	24 ° C
Relative Humidity:	28 %

10.4. Test Result

: Pass

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 91 of 95

10.4.1. Frequency Stability over Temperature and Voltage variation

Modulation: QPSK

Reference: - 48 Vdc at 20°C **Freq.** = 2543,250,000 MHz

Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (Hz)	ppm
100%	+20(Ref)	2543 250 011	11	0	0.0000
	-30	2543 249 996	-4	-15	-0.0060
	-20	2543 249 977	-23	-34	-0.0134
	-10	2543 250 005	5	-7	-0.0026
	0	2543 250 005	5	-6	-0.0025
	+10	2543 250 017	17	6	0.0024
	+30	2543 250 010	10	-1	-0.0004
	+40	2543 249 974	-26	-37	-0.0145
	+50	2543 250 018	18	7	0.0028
115%	+20	2543 250 024	24	13	0.0051
85%	+20	2543 250 022	22	11	0.0043

(Output Port 0)

Modulation: 16QAM

Reference: - 48 Vdc at 20°C **Freq.** = 2543,250,000 MHz

Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (Hz)	ppm
100%	+20(Ref)	2543 249 999	-1	0	0.0000
	-30	2543 250 004	4	5	0.0020
	-20	2543 249 984	-16	-15	-0.0058
	-10	2543 250 000	0	1	0.0006
	0	2543 250 006	6	7	0.0028
	+10	2543 249 981	-19	-18	-0.0070
	+30	2543 250 004	4	5	0.0020
	+40	2543 250 008	8	9	0.0036
	+50	2543 250 011	11	12	0.0048
115%	+20	2543 249 998	-2	-1	-0.0003
85%	+20	2543 249 996	-4	-3	-0.0011

(Output Port 1)

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 92 of 95

Modulation: 64QAM**Reference: - 48 Vdc at 20°C Freq. = 2543,250,000 MHz**

Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (Hz)	ppm
100%	+20(Ref)	2543 249 994	-6	0	0.0000
	-30	2543 249 980	-20	-14	-0.0055
	-20	2543 250 008	8	14	0.0054
	-10	2543 249 997	-3	3	0.0013
	0	2543 249 987	-13	-7	-0.0028
	+10	2543 249 993	-8	-2	-0.0006
	+30	2543 249 995	-5	1	0.0004
	+40	2543 249 996	-4	2	0.0006
	+50	2543 250 007	7	13	0.0051
115%	+20	2543 249 992	-8	-2	-0.0008
85%	+20	2543 249 996	-4	2	0.0008

(Output Port 0)

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 93 of 95

11. RF EXPOSURE STATEMENT

1. LIMITS

According to §1.1310 and §2.1091 RF exposure is calculated.

(B) Limits for General Population/Uncontrolled Exposures

Frequency range (MHz)	Electric field Strength (V/m)	Magnetic field Strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
0.3 - 1.34.....	614	1.63	*(100)	30
1.34 - 30.....	824/f	2.19/f	*(180/ f ²)	30
30 - 300.....	27.5	0.073	0.2	30
300 - 1500.....			f/1500	30
1500 - 100.000.....			1.0	30

F = frequency in MHz

* = Plane-wave equivalent power density

2. MAXIMUM PERMISSIBLE EXPOSURE Prediction

Prediction of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

S = Power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 94 of 95

Max Peak output Power at antenna input terminal	34.95000	dBm
Max Peak output Power at antenna input terminal	3126.07937	mW
Prediction distance	30.00000	cm
Prediction frequency	2499.00000	MHz
Antenna Gain(typical)	4.00000	dBi
Antenna Gain(numeric)	2.51189	–
Power density at prediction frequency (S)	0.69430	mW/cm ²
MPE limit for uncontrolled exposure at prediction frequency	1.00000	mW/cm ²

3. RESULTS

The power density level at 30 cm is 0.69430 mW/cm², which is below the uncontrolled exposure limit of 1.0 mW/cm² at 2499 MHz.

FCC PT.27 TEST REPORT	FCC CERTIFICATION REPORT			HCT PT.27 TEST REPORT
Test Report No. HCTR1012FR03	Date of Issue: December 06, 2010	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282501	Page 95 of 95