



(16QAM Low Channel)

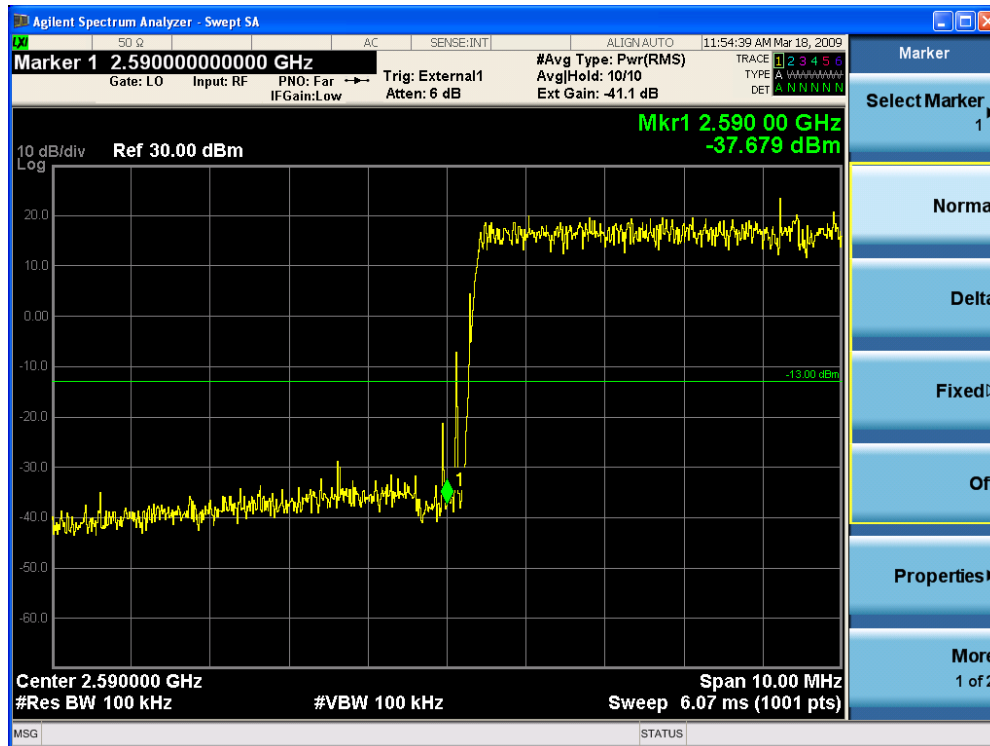


(16QAM High Channel)

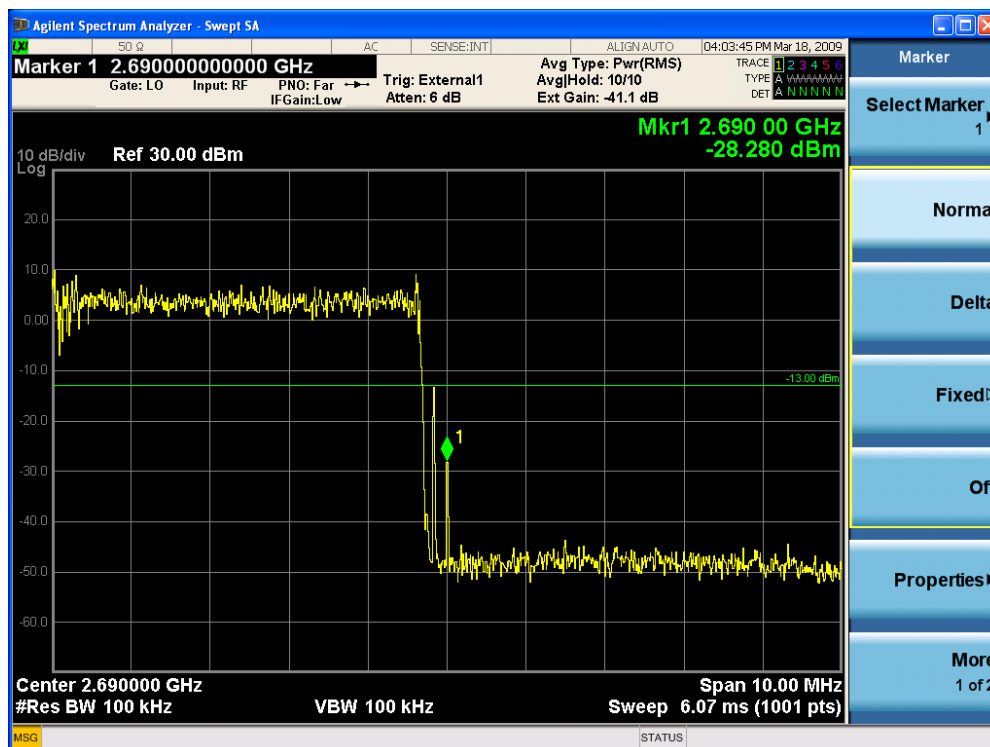


HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 46 of 89

(64QAM Low Channel)

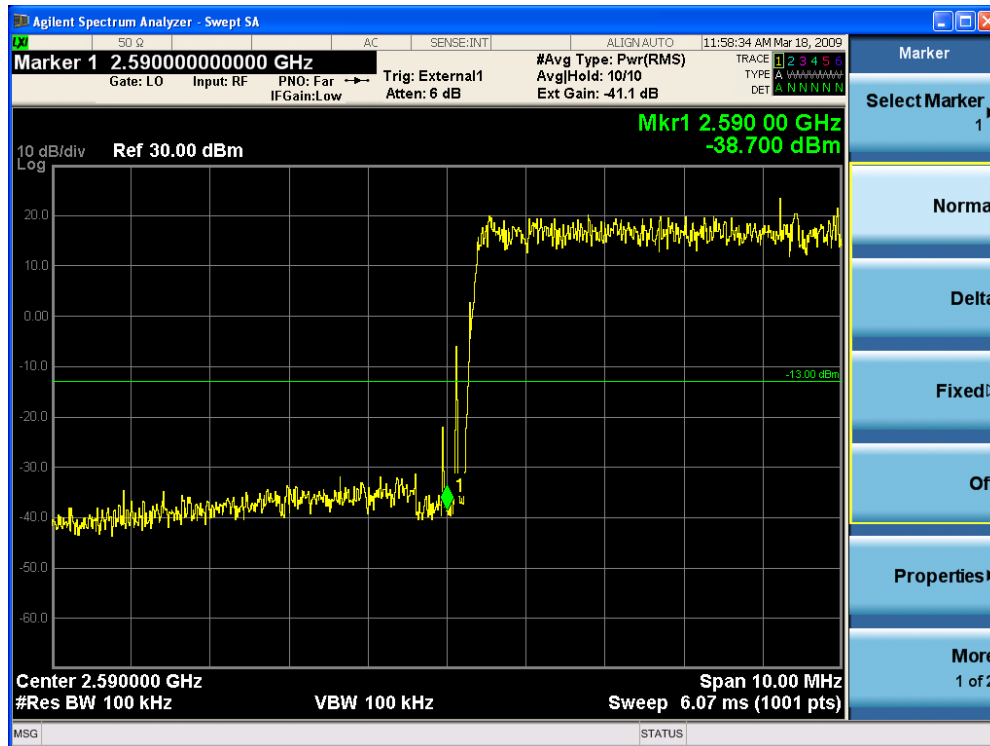


(64QAM High Channel)

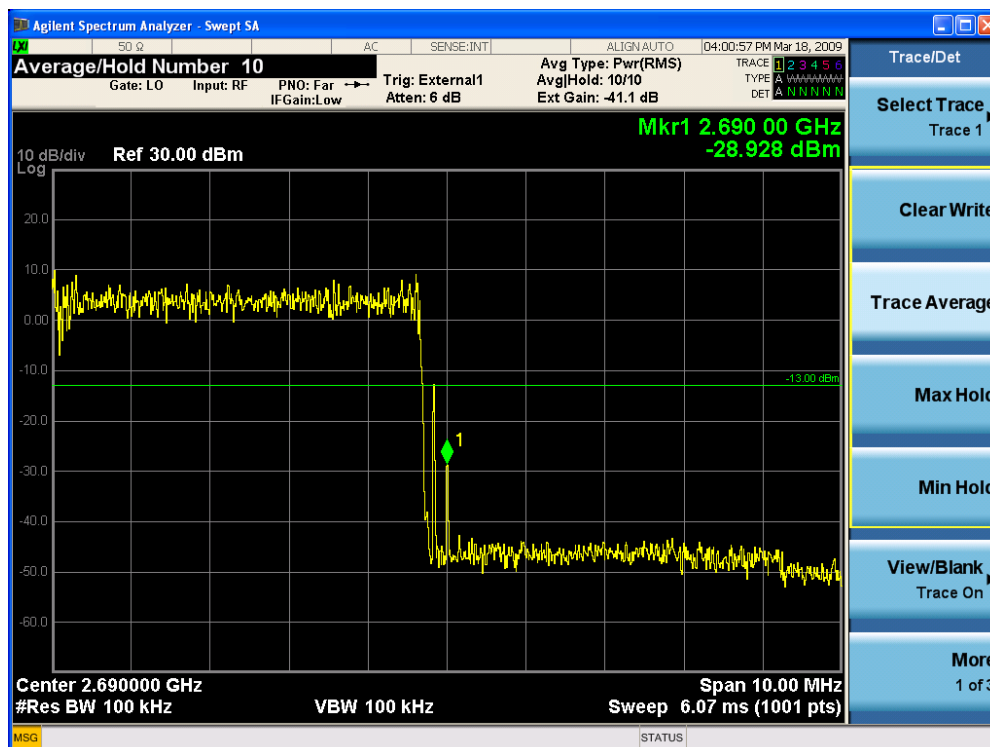


HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 47 of 89

7.4.4. Plot Data at Output 1

(QPSK Low Channel)

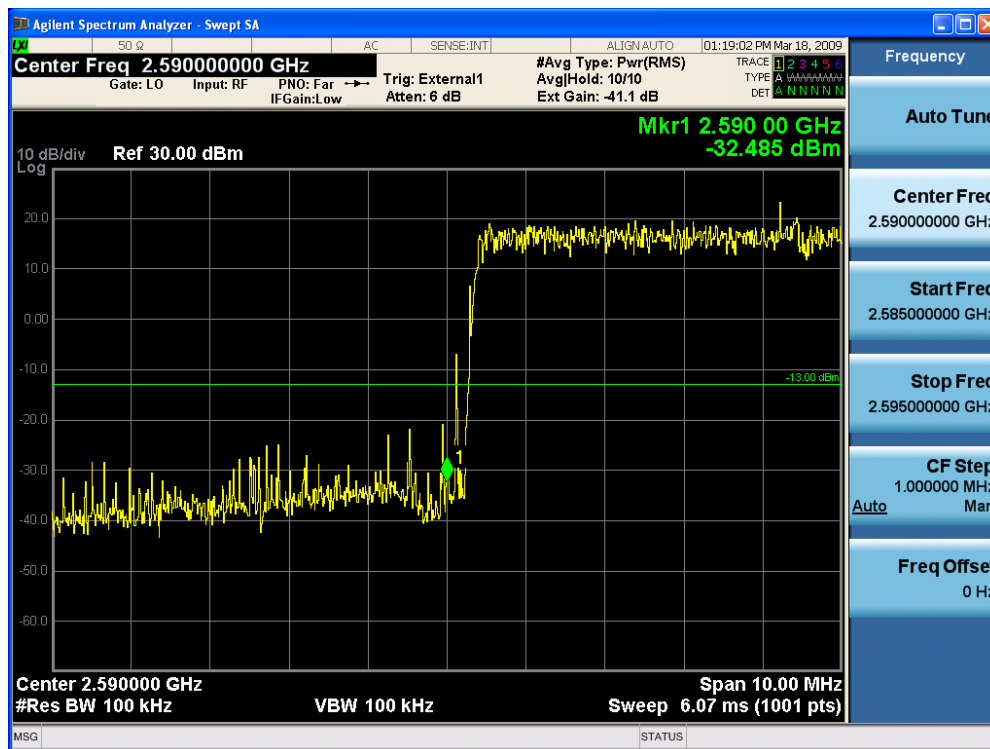


(QPSK High Channel)

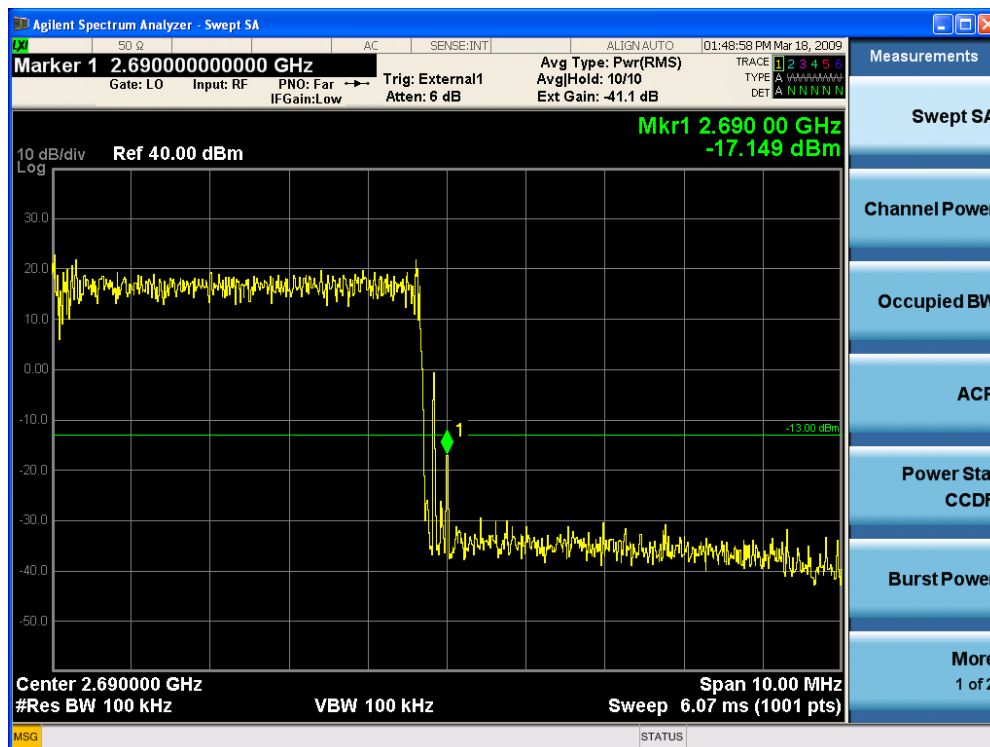


HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 48 of 89

(16QAM Low Channel)

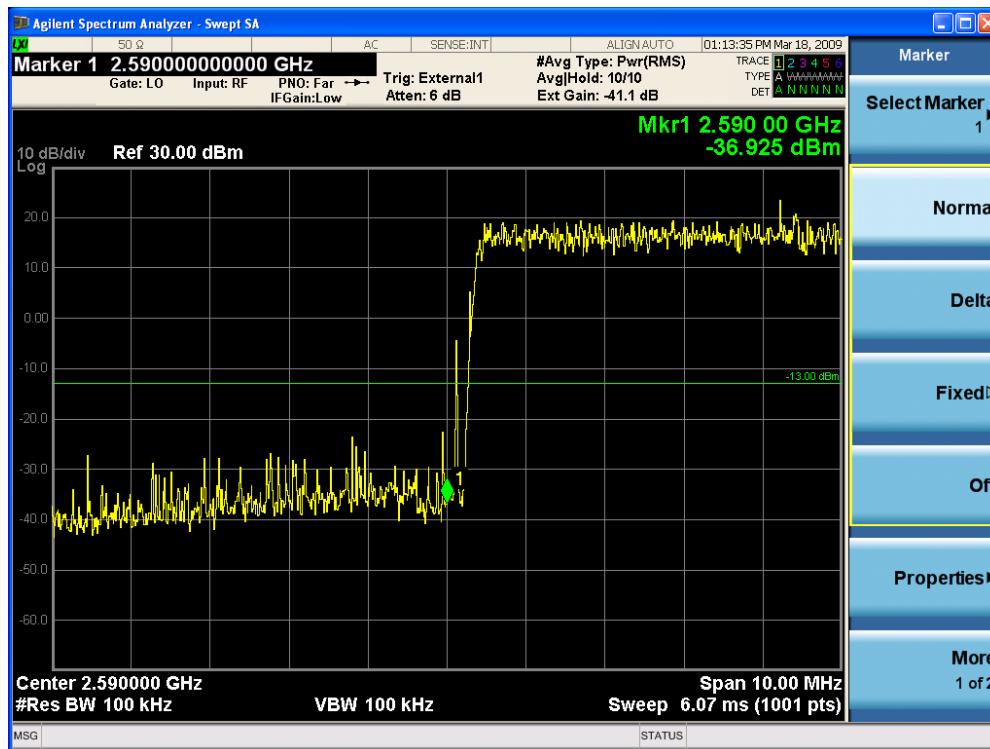


(16QAM High Channel)

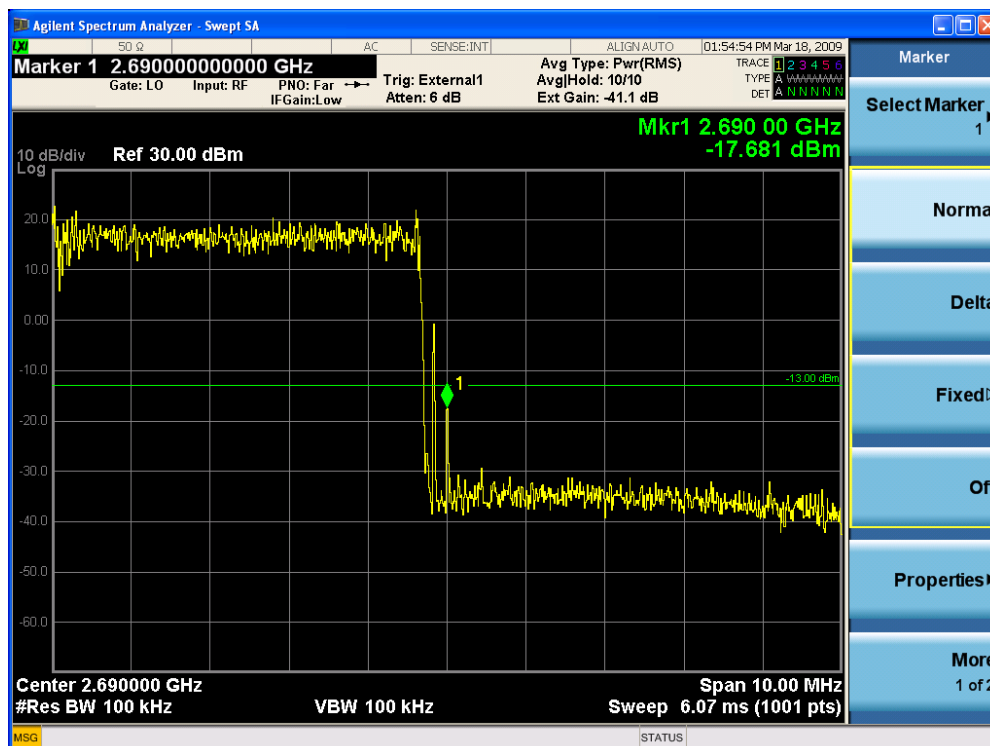


HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 49 of 89

(64QAM Low Channel)

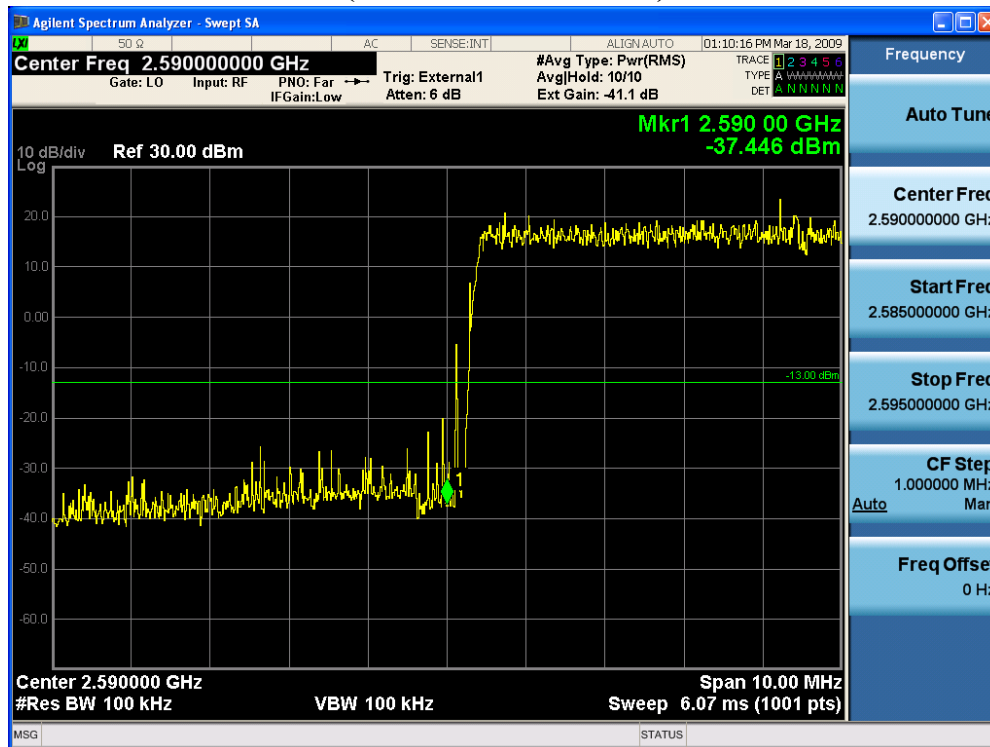


(64QAM High Channel)

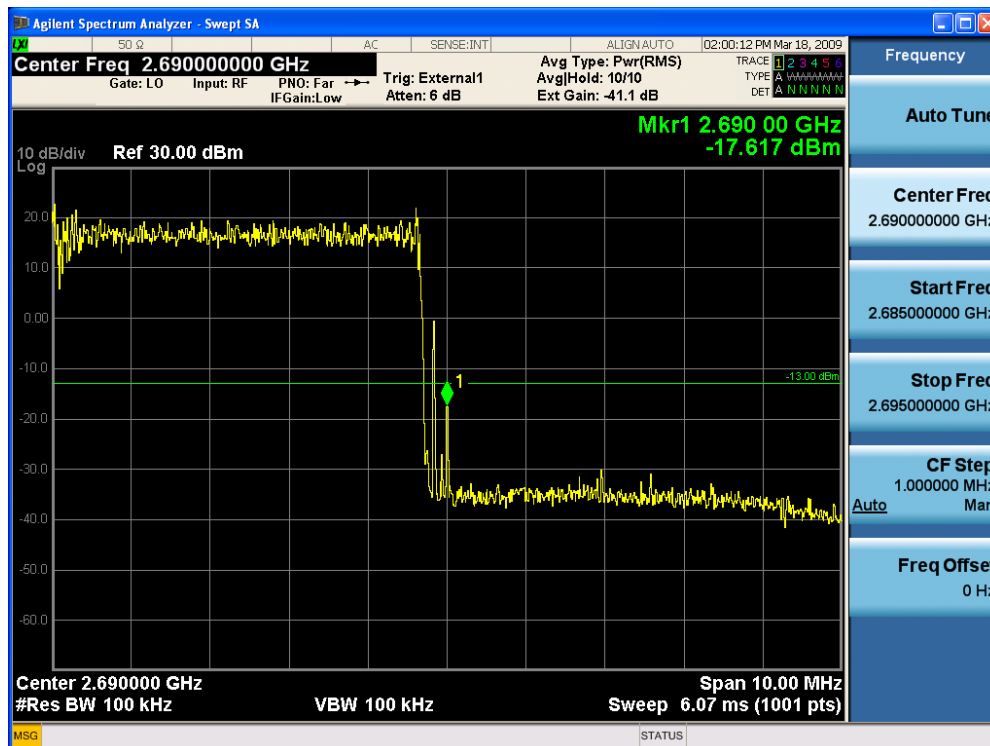


HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 50 of 89

7.4.5. Plot Data at Combined Output

(QPSK Low Channel)

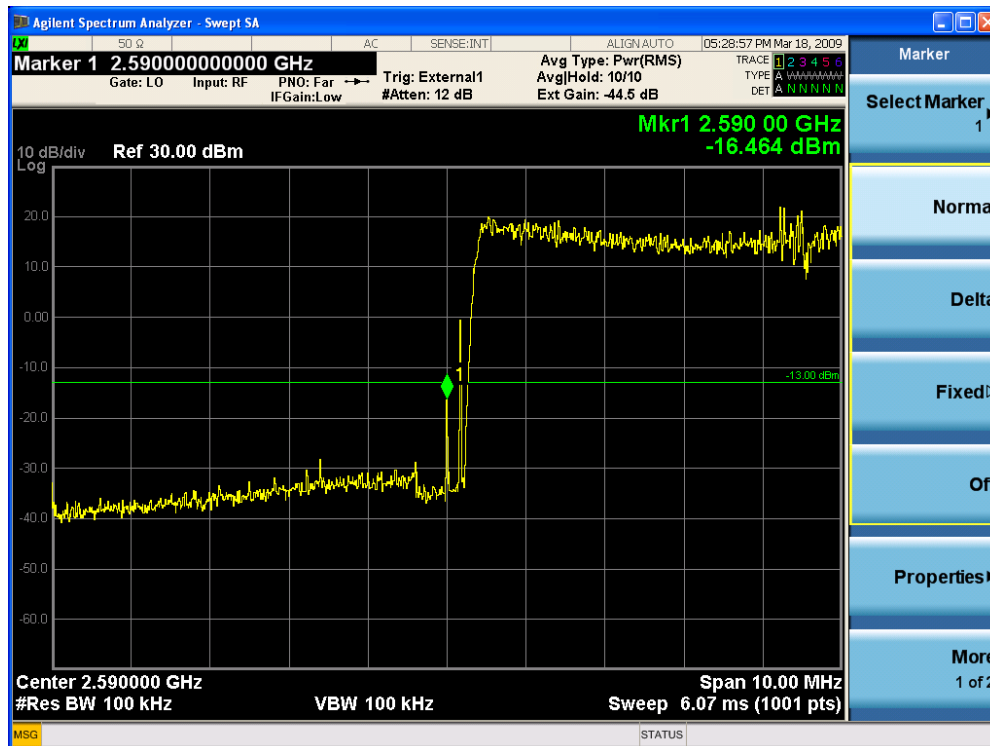


(QPSK High Channel)

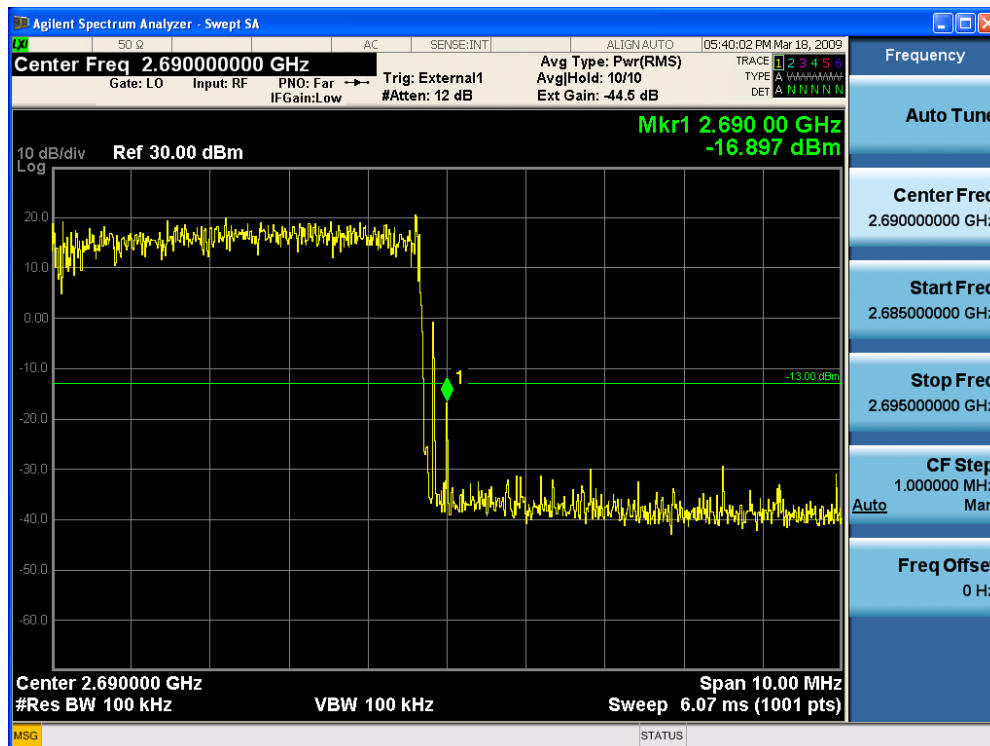


HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 51 of 89

(16QAM Low Channel)

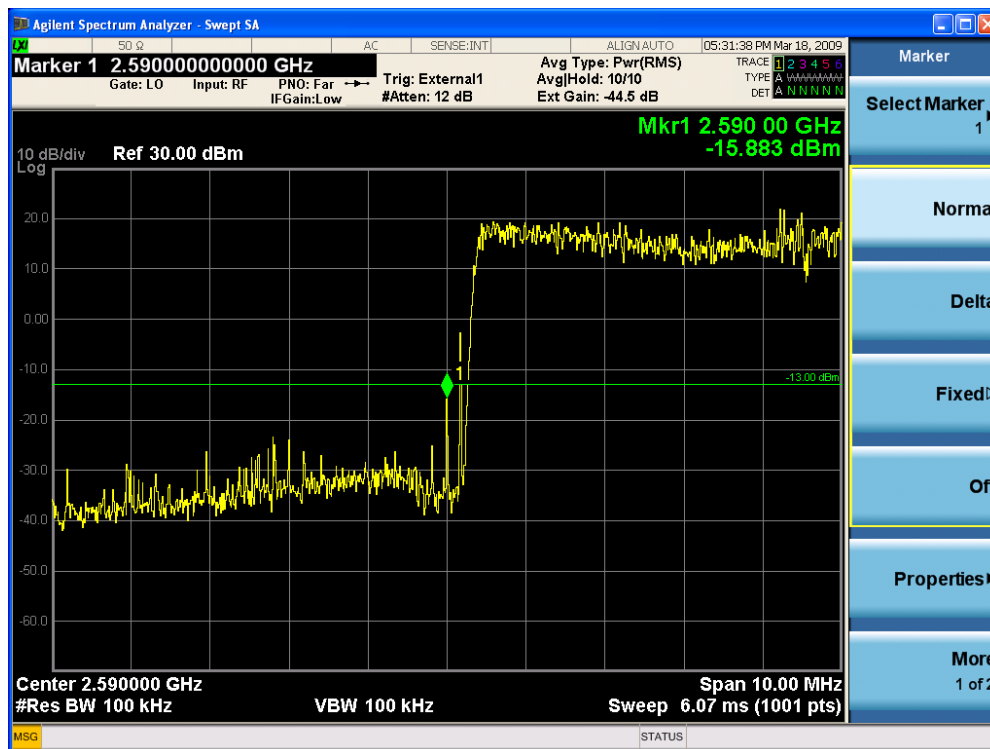


(16QAM High Channel)

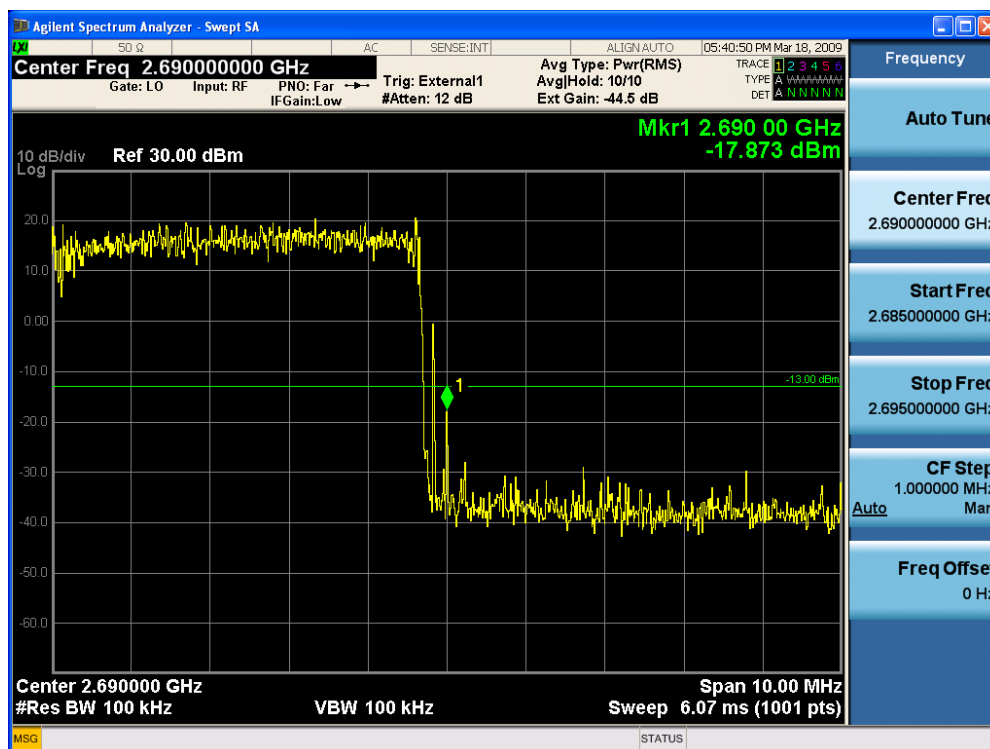


HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 52 of 89

(64QAM Low Channel)

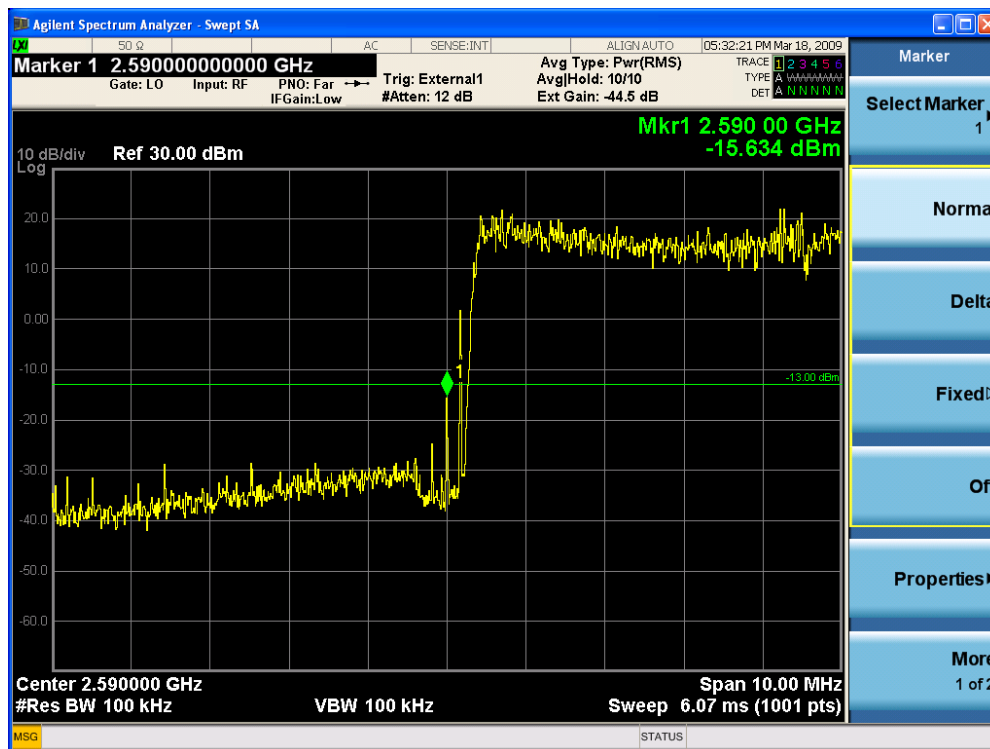

(64QAM High Channel)

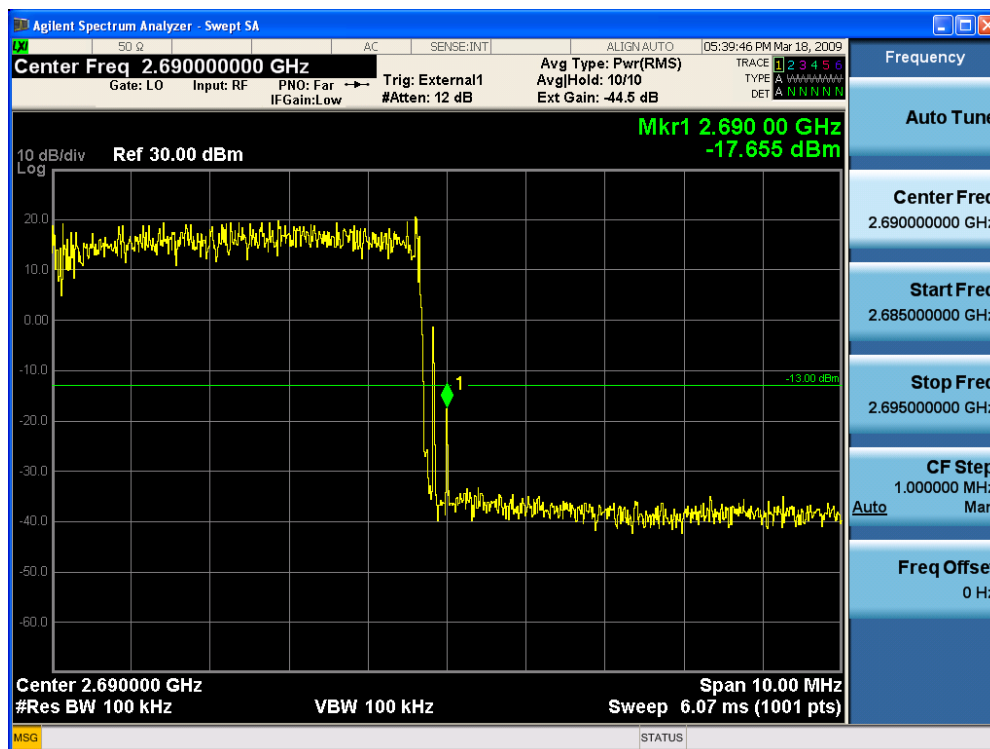

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 53 of 89

8. SPURIOUS EMISSION AT ANTENNA TERMINAL

8.1. Applicable Standard Requirements:

CFR 47§2.1051, §27.53

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in §2.1051

8.2. Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Due Date
Agilent	Signal Analyzer	N9020A	US46220219	02/19/2010

8.3. Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation.

The resolution bandwidth of the spectrum analyzer was set at 1MHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

The EUT provides the MIMO function which is able to transmit on the same channel with same data simultaneously therefore a combiner is used to sum the individual transmitter output power.

The test data is shown as a combined output in the report.

8.3.1 Environmental Conditions:

Temperature:	25 °C
Relative Humidity:	59 %


8.4. Test Result

: Pass

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 54 of 89


8.4.1. Plot Data at Output 0

(QPSK Low Channel)

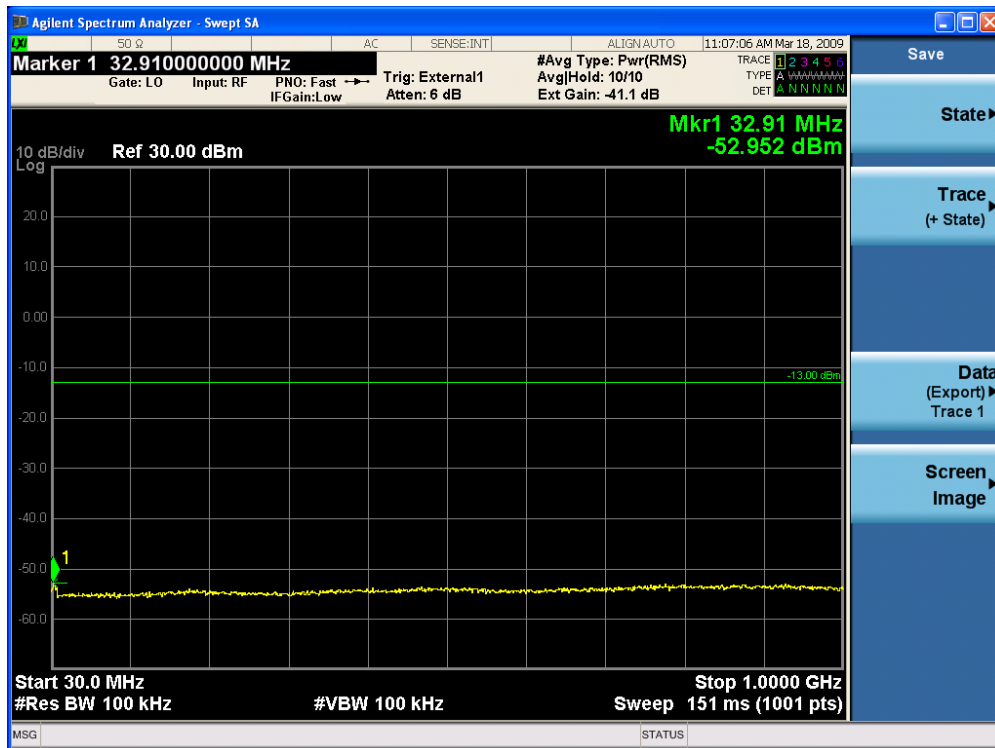

(30 MHz ~ 1 GHz)


(QPSK Middle Channel)

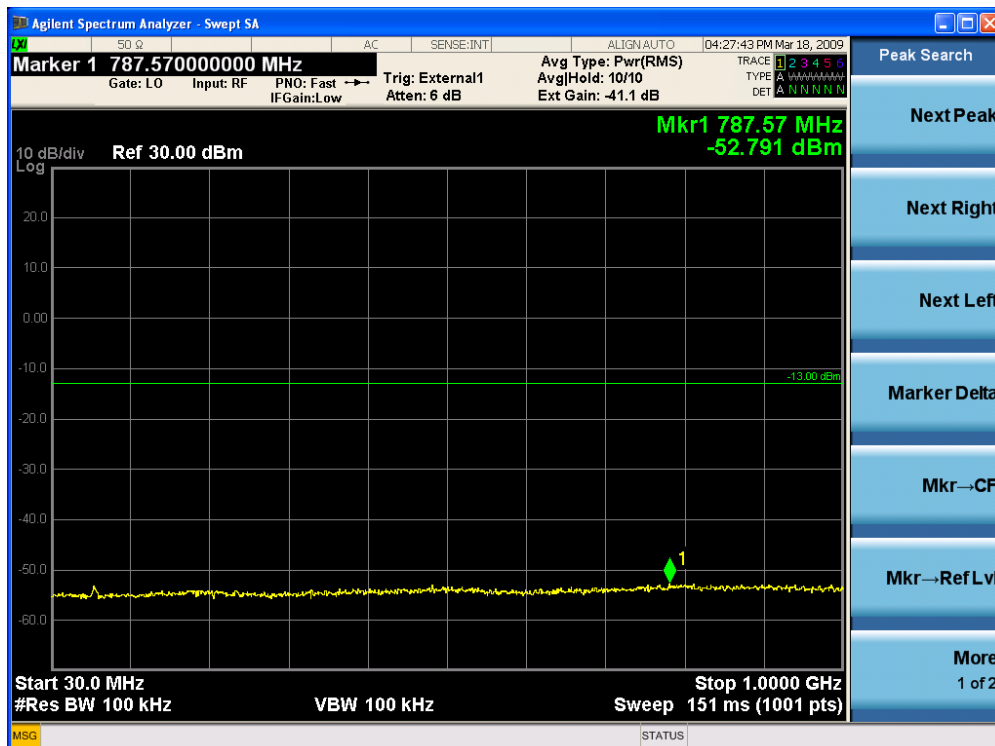

(30 MHz ~ 1 GHz)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 55 of 89

(QPSK High Channel)

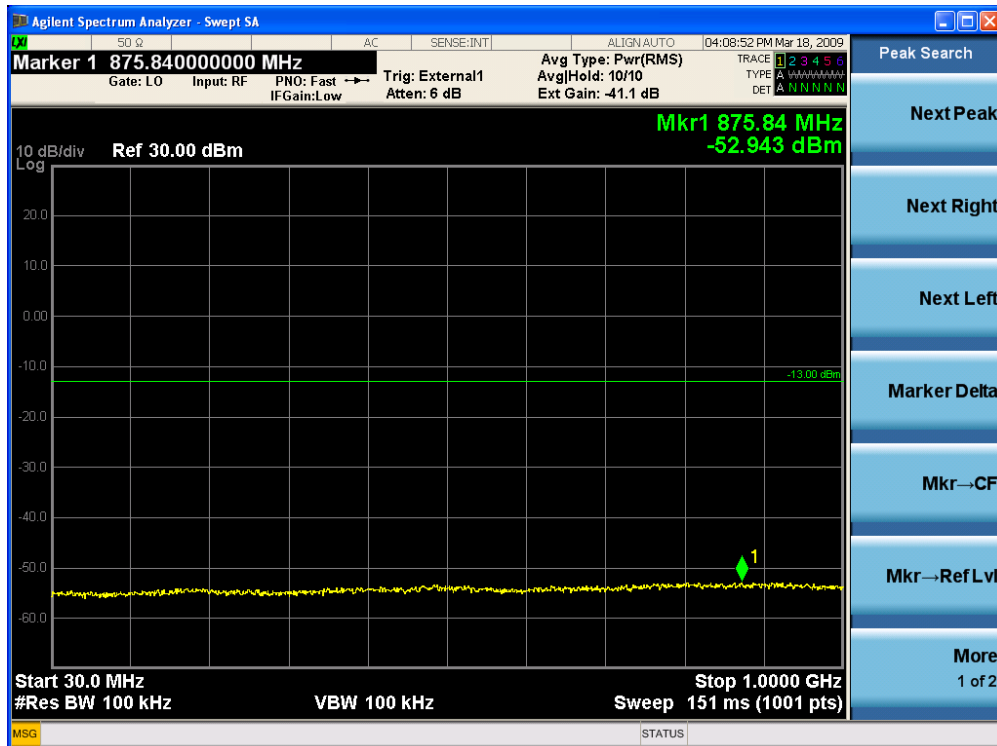

(30 MHz ~ 1 GHz)

(QPSK Low Channel)



(1 GHz ~ 26.5 GHz)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 56 of 89

(QPSK Middle Channel)



(1 GHz ~ 26.5 GHz)


(QPSK High Channel)



(1 GHz ~ 26.5 GHz)


HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 57 of 89

(16QAM LOW Channel)

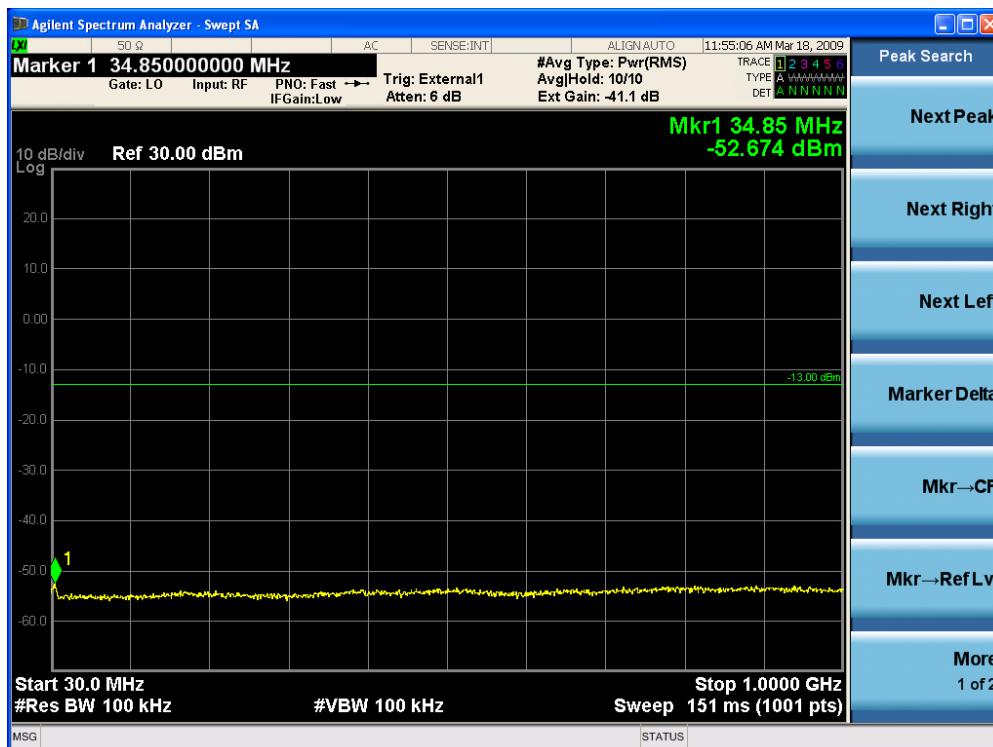

(30 MHz ~ 1 GHz)


(16QAM Middle Channel)

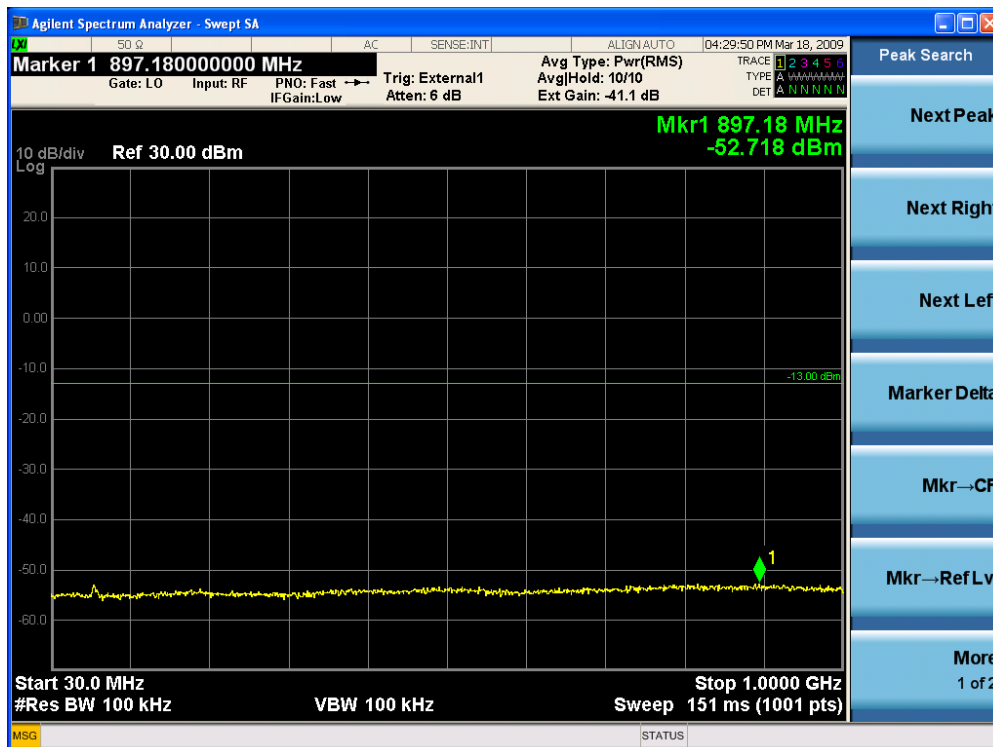

(30 MHz ~ 1 GHz)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 58 of 89

(16QAM High Channel)

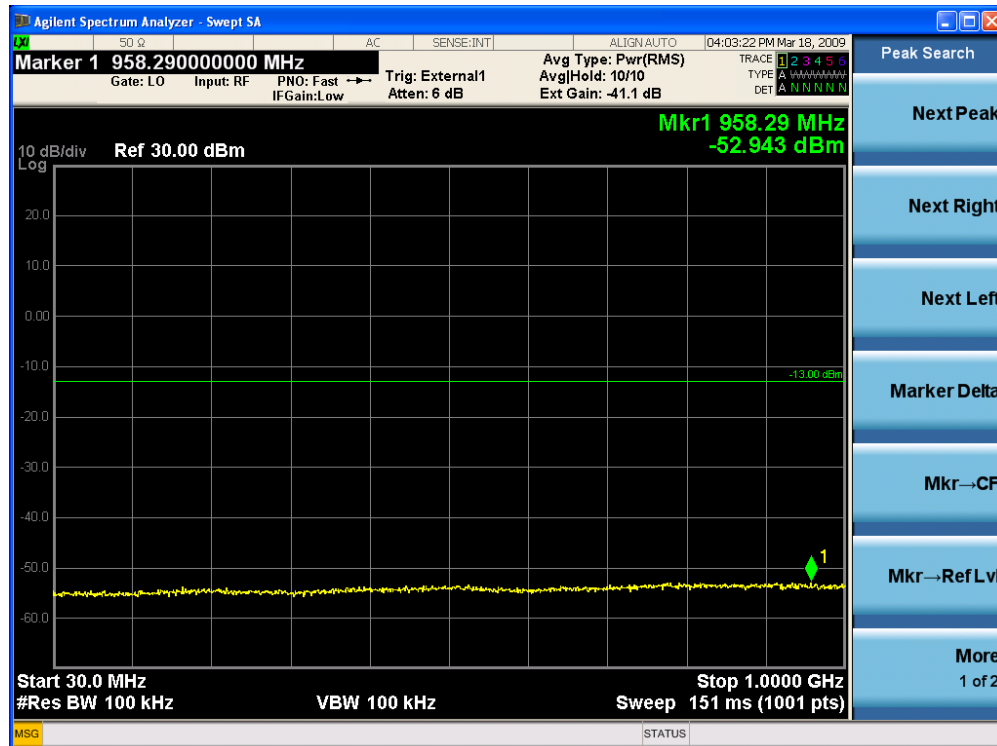

(30 MHz ~ 1 GHz)


16QAM LOW Channel)



(1 GHz ~ 26.5 GHz)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 59 of 89

(16QAM Middle Channel)

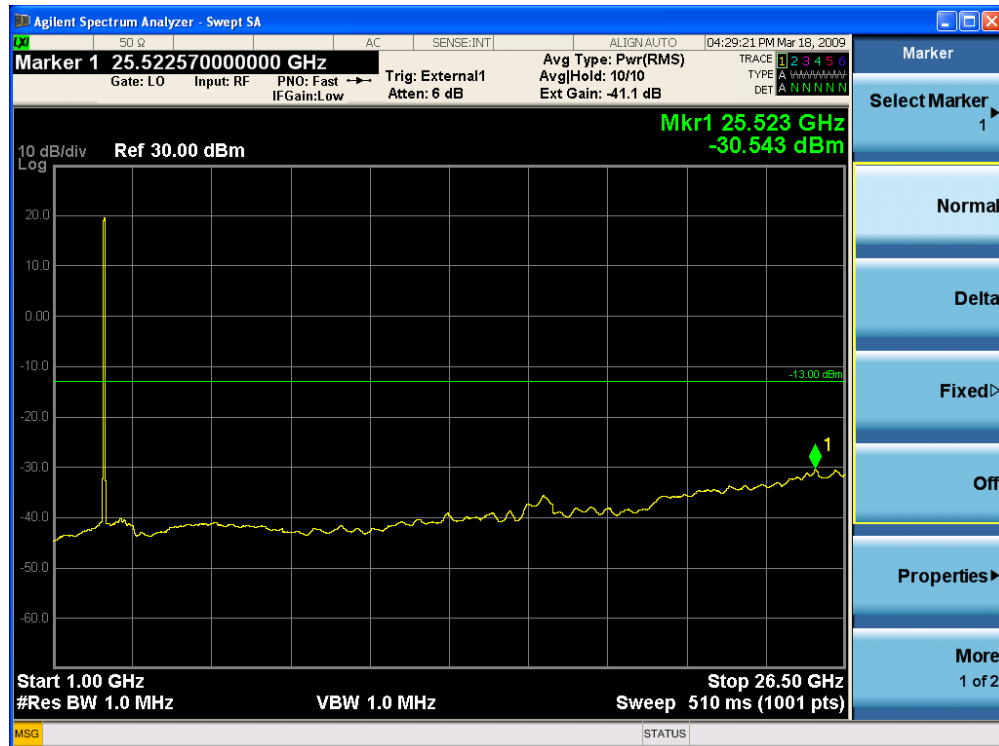

(1 GHz ~ 26.5 GHz)


(16QAM High Channel)



(1 GHz ~ 26.5 GHz)


HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 60 of 89

(64QAM Low Channel)

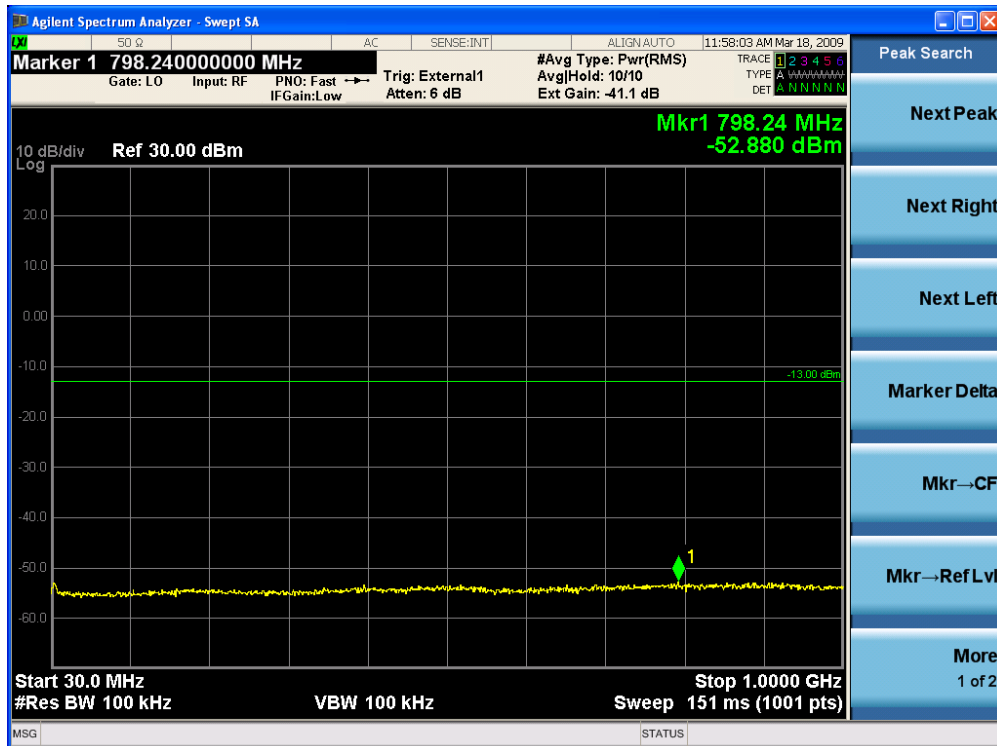

(30 MHz ~ 1 GHz)


(64QAM Middle Channel)

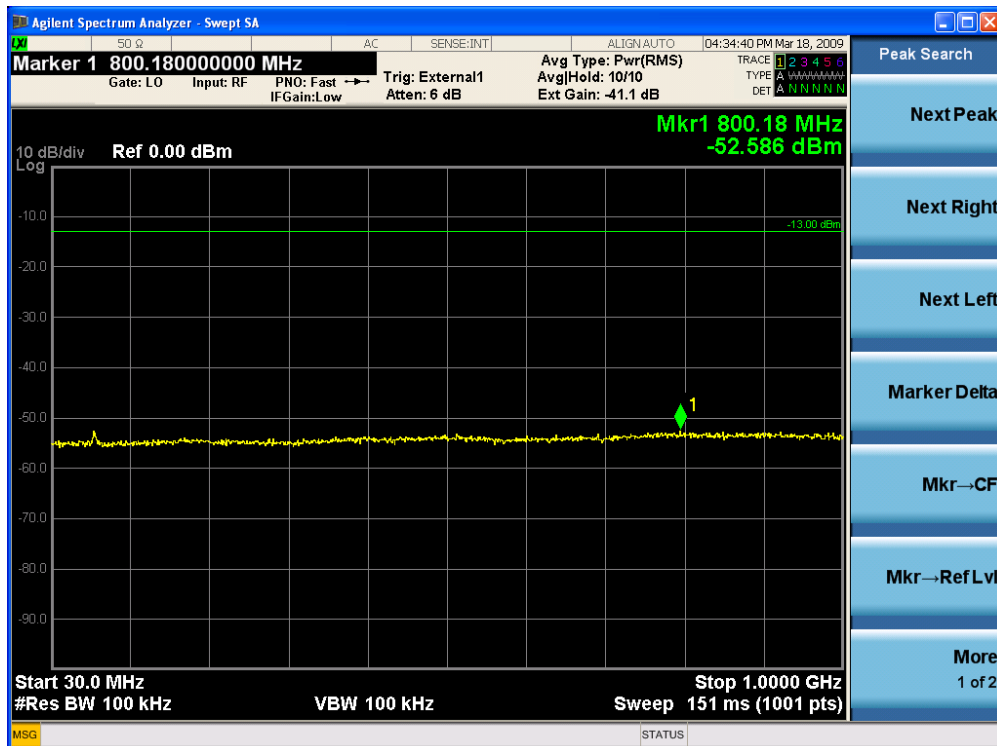

(30 MHz ~ 1 GHz)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 61 of 89

(64QAM High Channel)

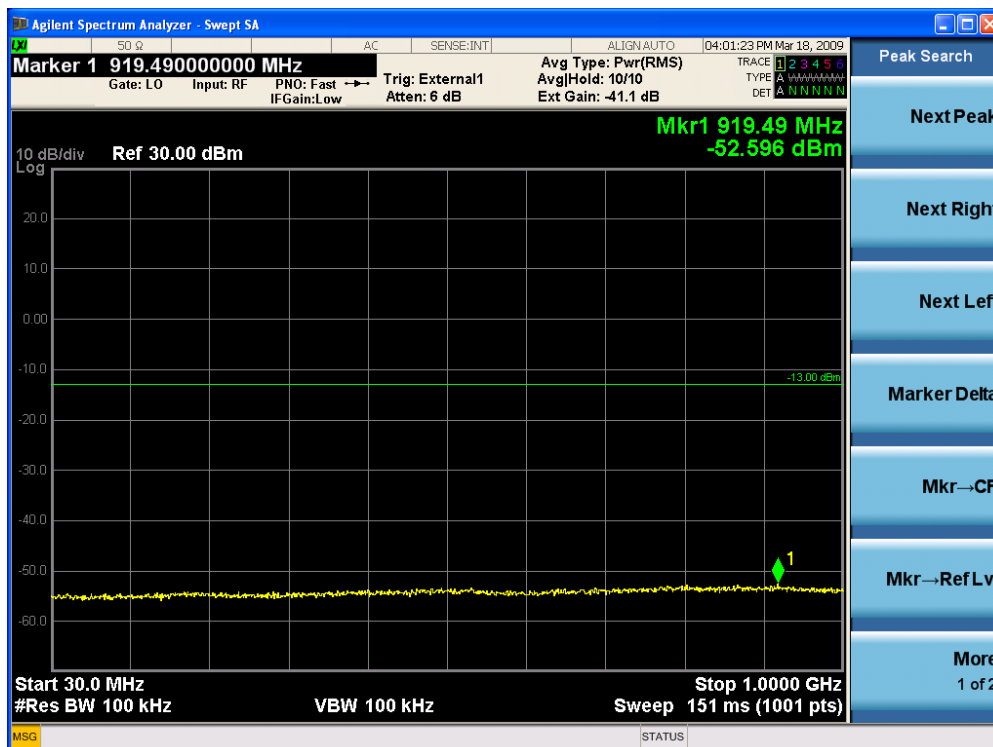

(30 MHz ~ 1 GHz)

(64QAM Low Channel)



(1 GHz ~ 26.5 GHz)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 62 of 89

(64QAM Middle Channel)



(1 GHz ~ 26.5 GHz)

(64QAM High Channel)




(1 GHz ~ 26.5 GHz)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 63 of 89


8.4.2. Plot Data at Output 1

(QPSK Low Channel)

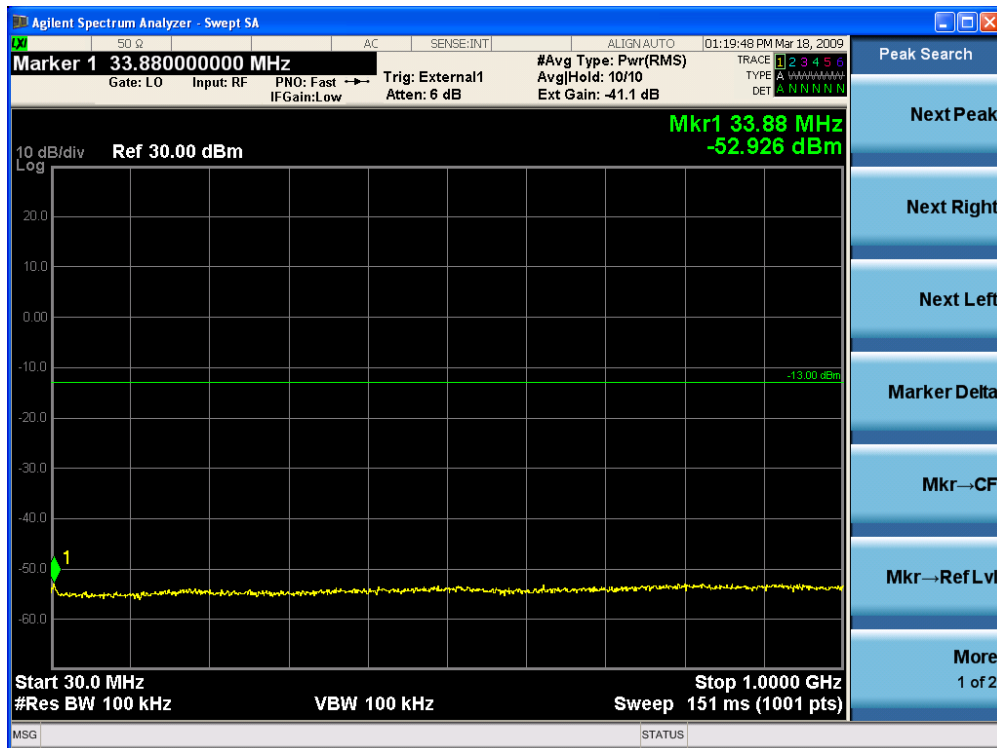

(30 MHz ~ 1 GHz)


(QPSK Middle Channel)

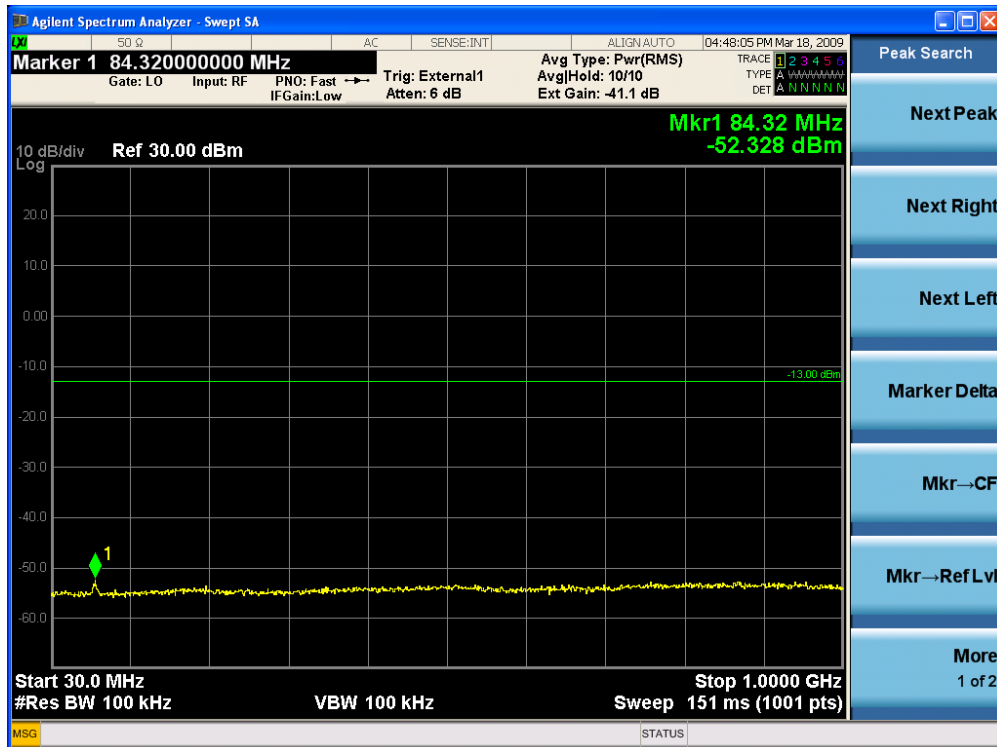

(30 MHz ~ 1 GHz)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 64 of 89

(QPSK High Channel)

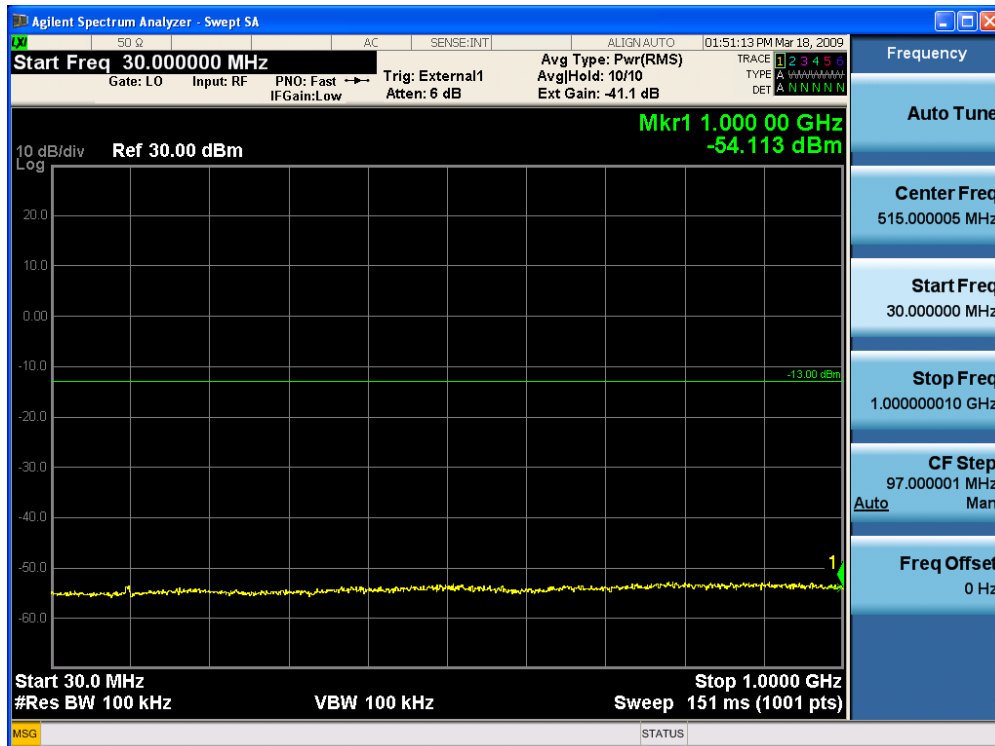

(30 MHz ~ 1 GHz)

(QPSK Low Channel)



(1 GHz ~ 26.5 GHz)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 65 of 89

(QPSK Middle Channel)



(1 GHz ~ 26.5 GHz)


(QPSK High Channel)



(1 GHz ~ 26.5 GHz)


HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 66 of 89

(16QAM Low Channel)

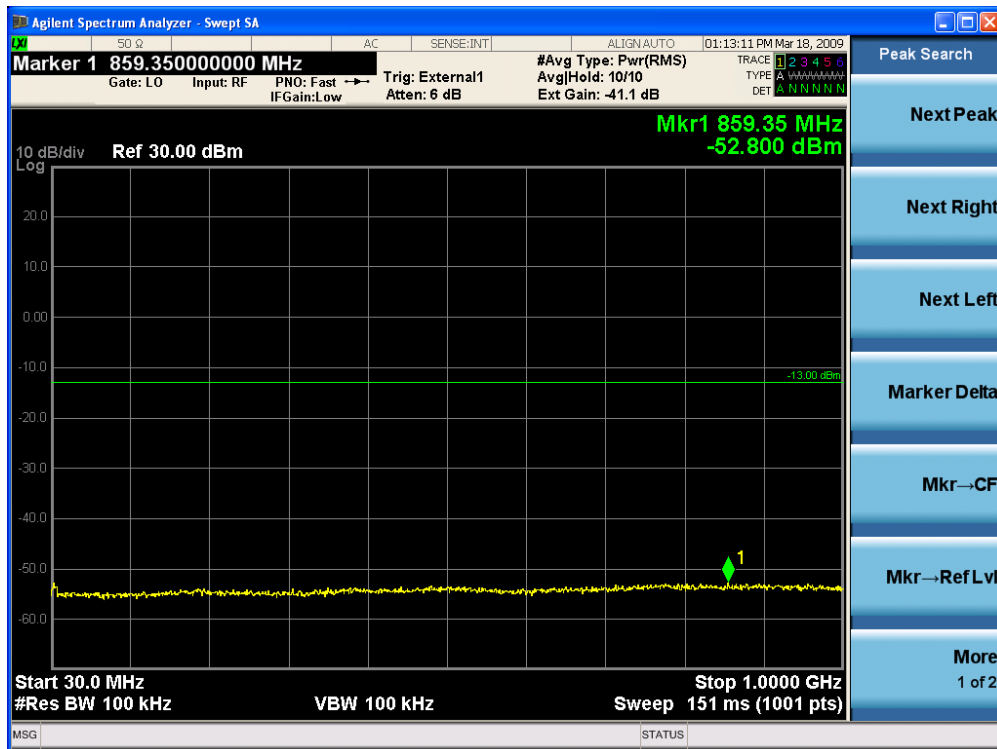

(30 MHz ~ 1 GHz)


(16QAM Middle Channel)

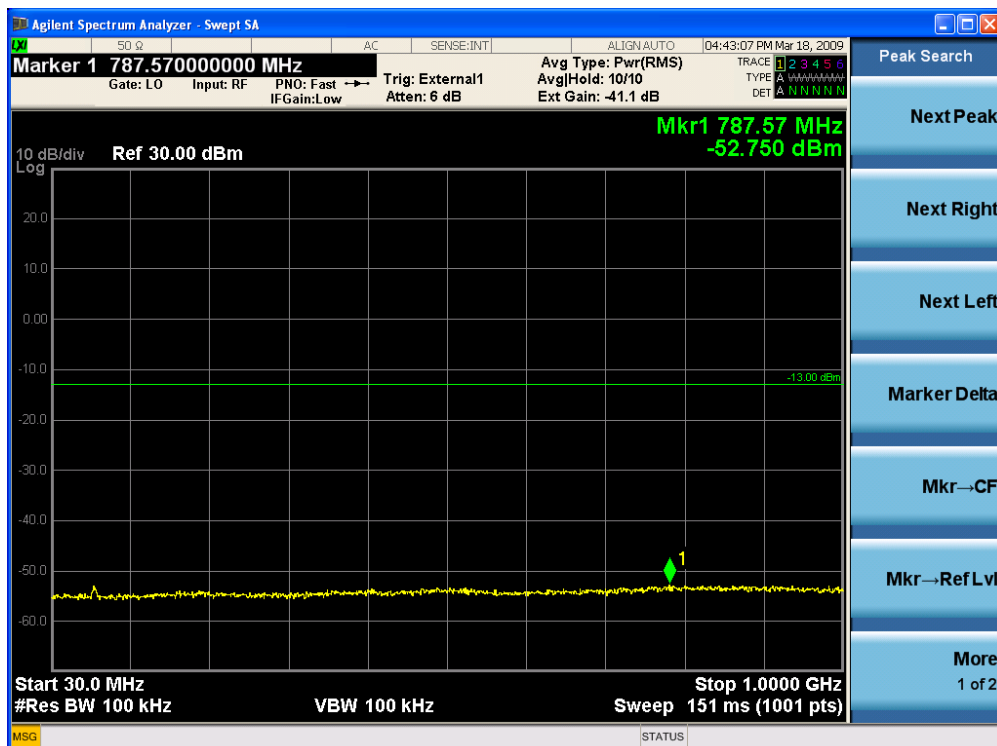

(30 MHz ~ 1 GHz)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 67 of 89

(16QAM High Channel)

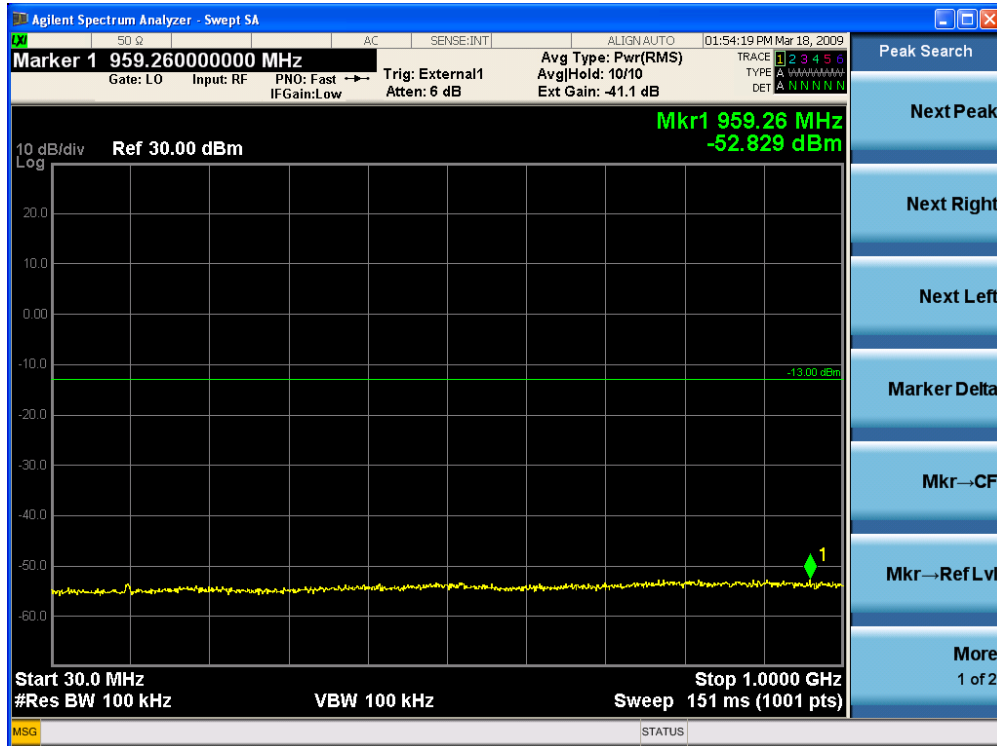

(30 MHz ~ 1 GHz)

(16QAM Low Channel)



(1 GHz ~ 26.5 GHz)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 68 of 89

(16QAM Middle Channel)



(1 GHz ~ 26.5 GHz)


(16QAM High Channel)



(1 GHz ~ 26.5 GHz)


HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 69 of 89

(64QAM Low Channel)

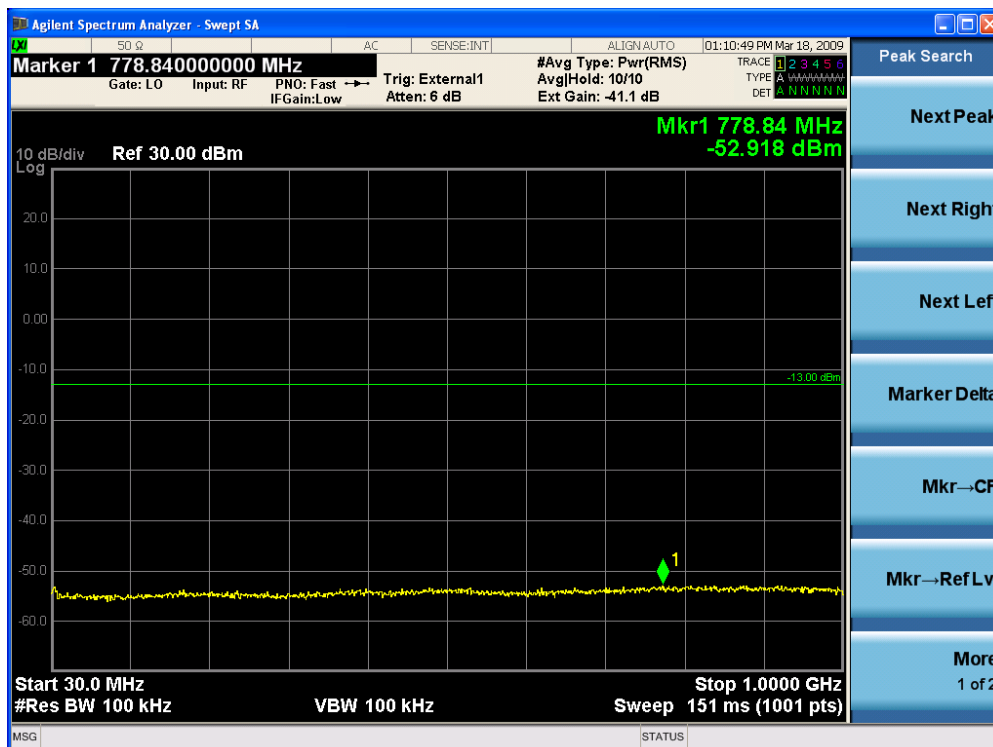

(30 MHz ~ 1 GHz)


(64QAM Middle Channel)

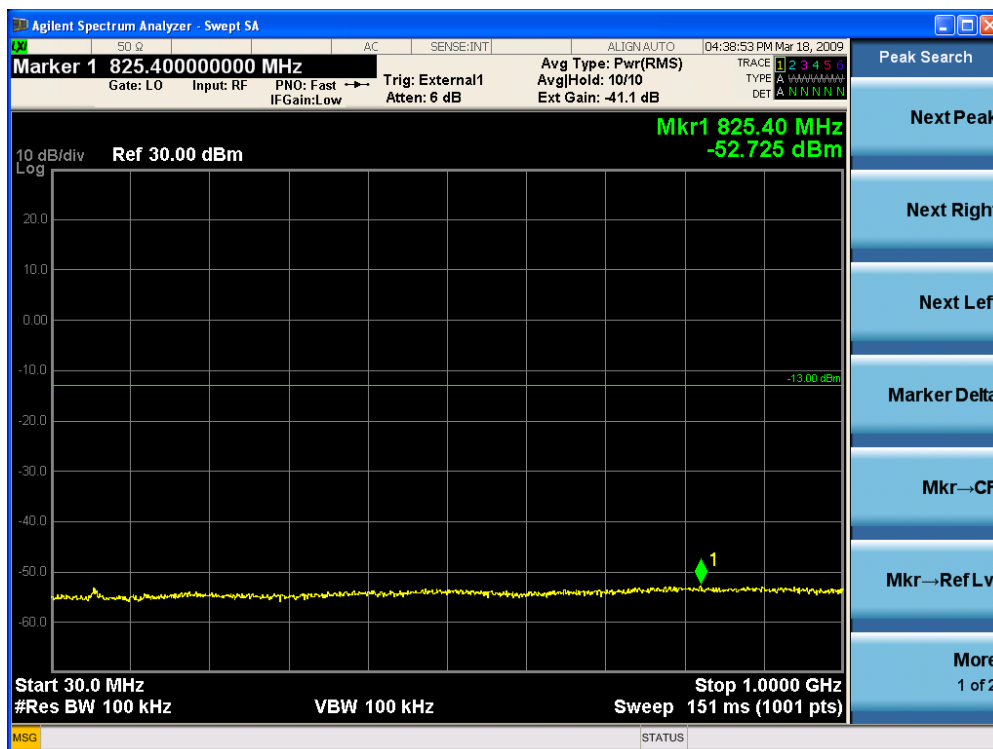

(30 MHz ~ 1 GHz)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 70 of 89

(64QAM High Channel)

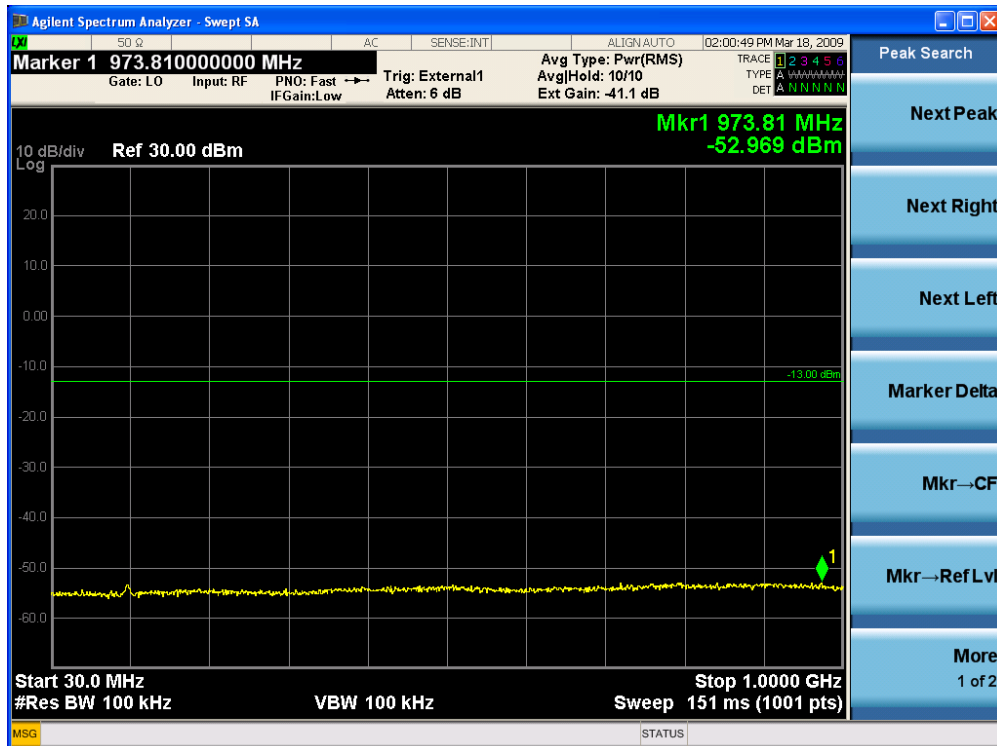

(30 MHz ~ 1 GHz)

(64QAM Low Channel)



(1 GHz ~ 26.5 GHz)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 71 of 89

(64QAM Middle Channel)



(1 GHz ~ 26.5 GHz)


(64QAM High Channel)



(1 GHz ~ 26.5 GHz)


HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 72 of 89

8.4.4 Plot Data at Combined Output (QPSK Low Channel)

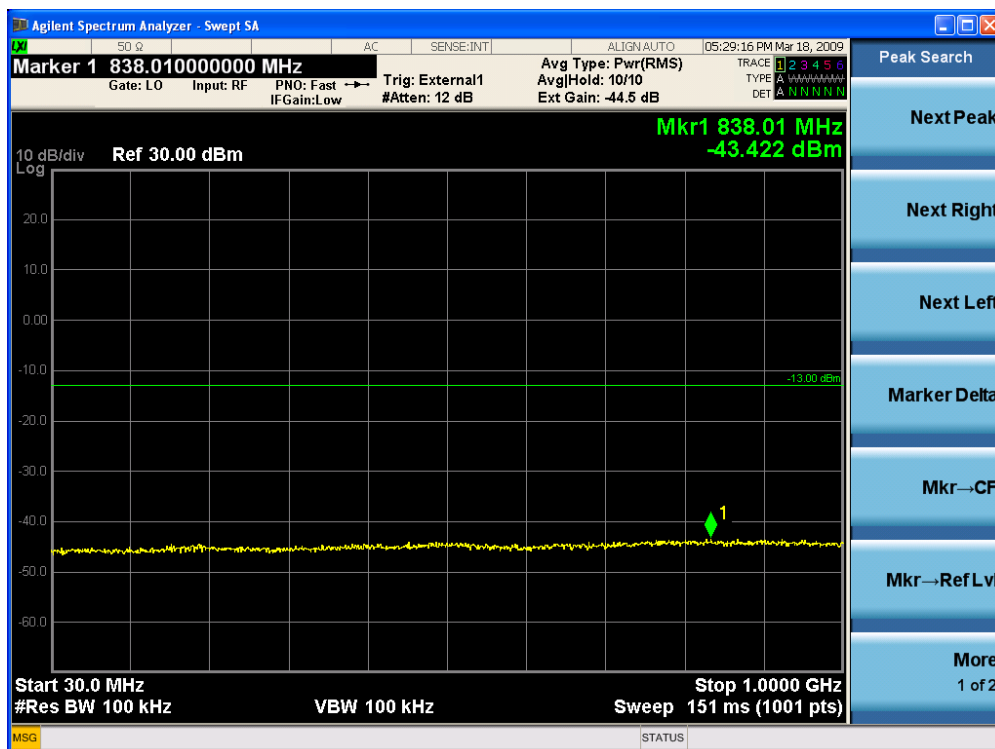

(30 MHz ~ 1 GHz)


(QPSK Middle Channel)

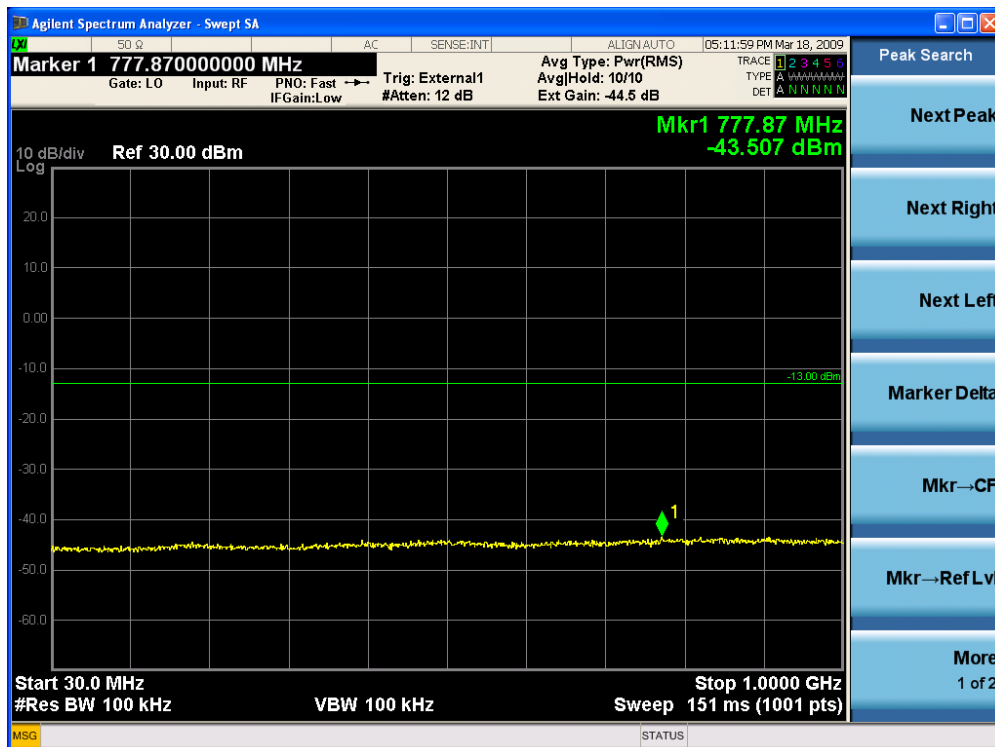

(30 MHz ~ 1 GHz)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 73 of 89


(QPSK High Channel)

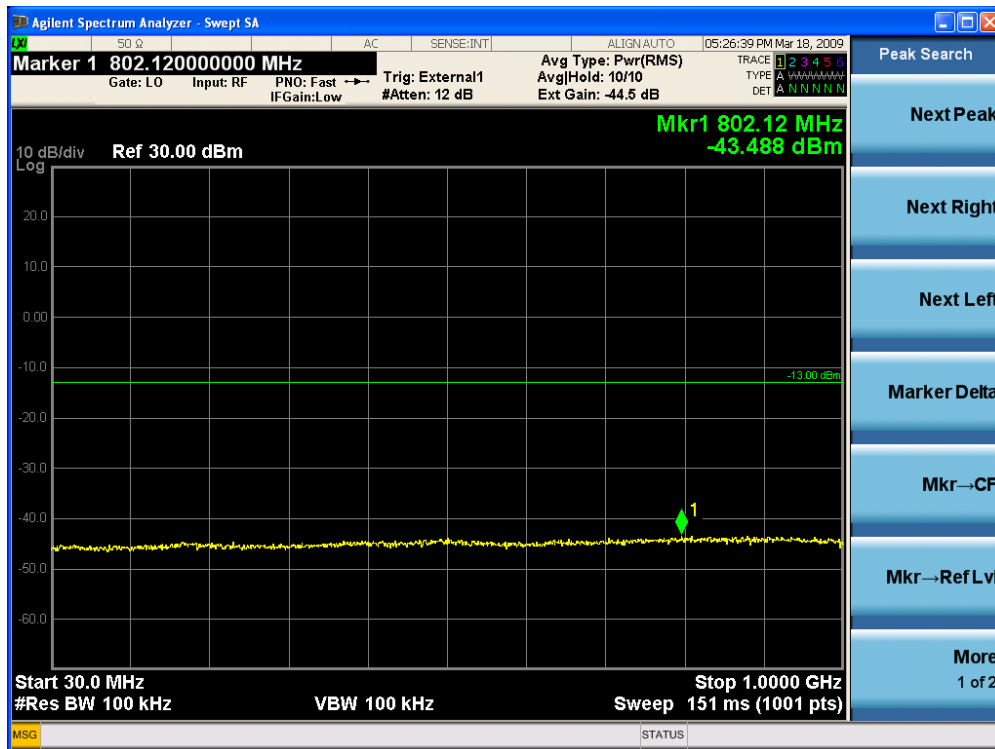

(30 MHz ~ 1 GHz)

8.4.5 Plot Data at Combined Output


(QPSK Low Channel)

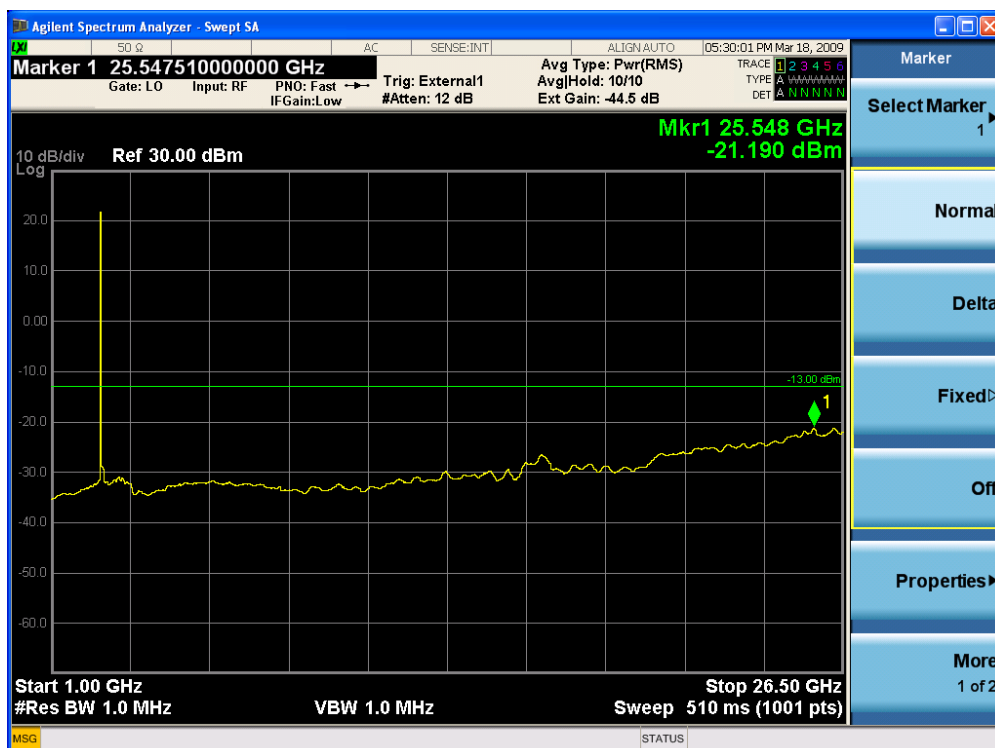

(1 GHz ~ 26.5 GHz)


HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 74 of 89

(QPSK Middle Channel)

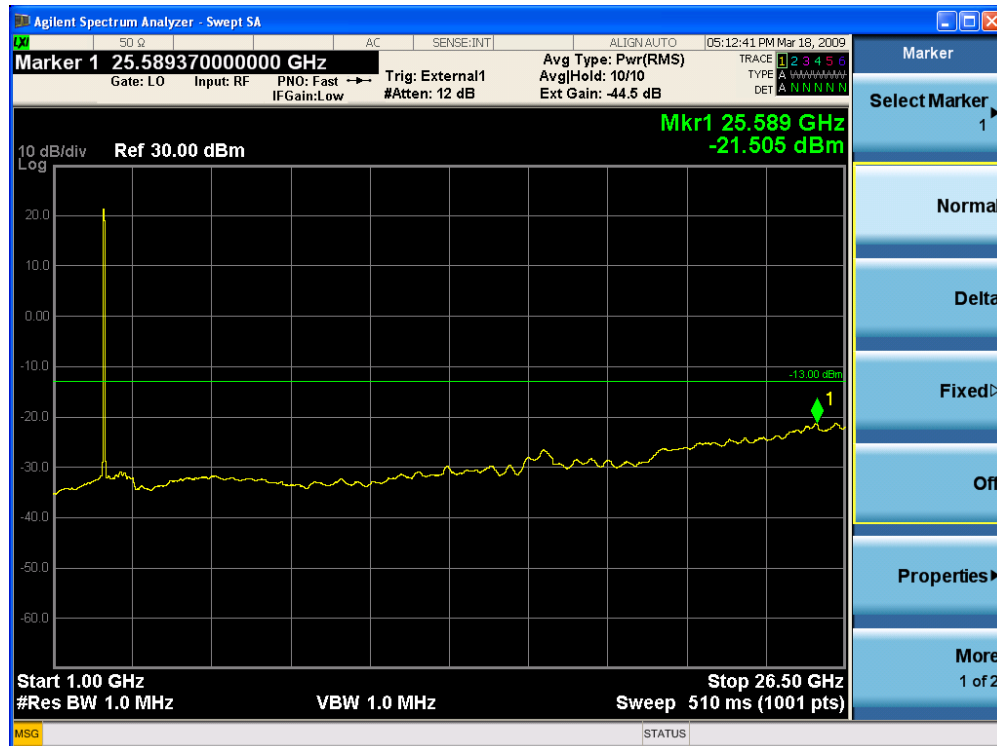

(1 GHz ~ 26.5 GHz)


(QPSK High Channel)

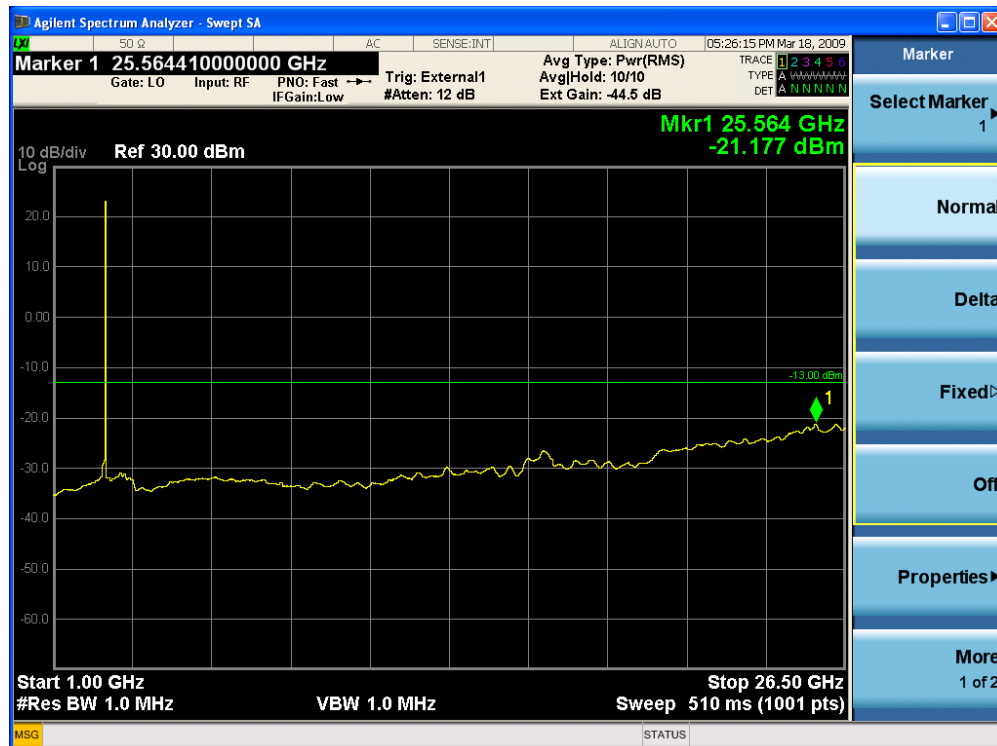

(1 GHz ~ 26.5 GHz)


HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 75 of 89

(16QAM Low Channel)

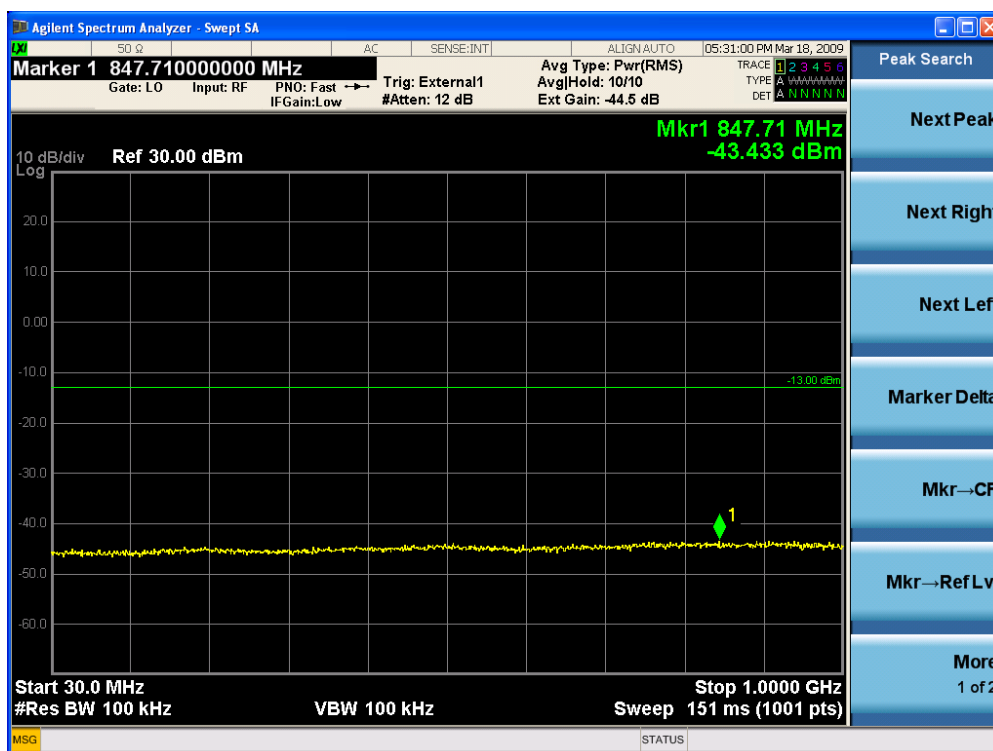

(30 MHz ~ 1 GHz)


(16QAM Middle Channel)

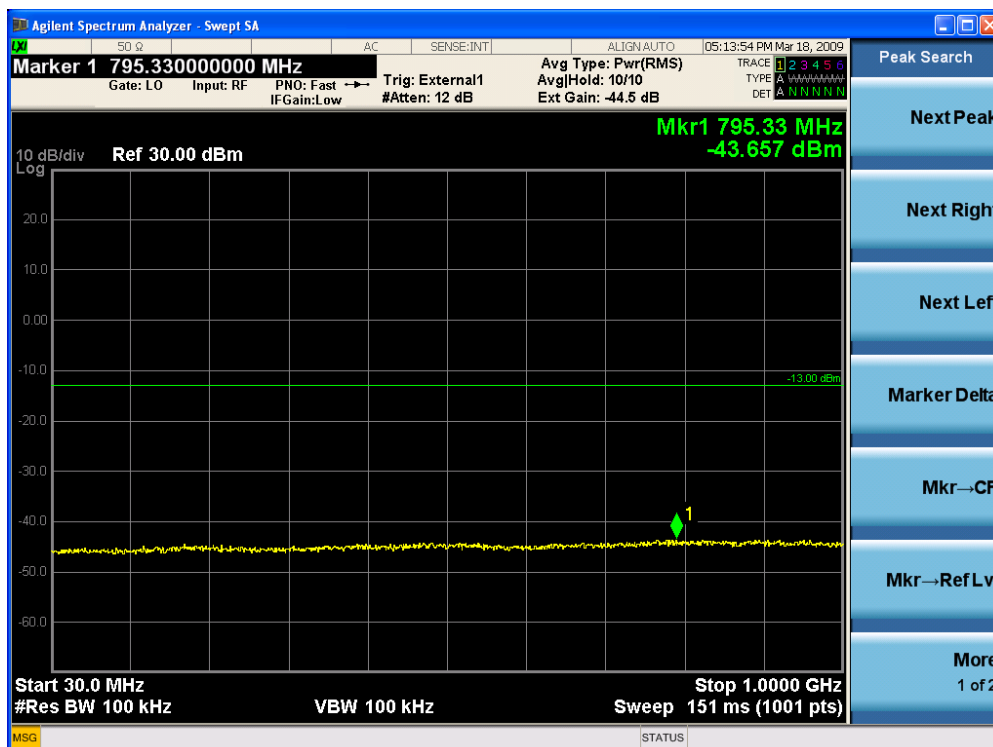

(30 MHz ~ 1 GHz)


HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 76 of 89

(16QAM High Channel)

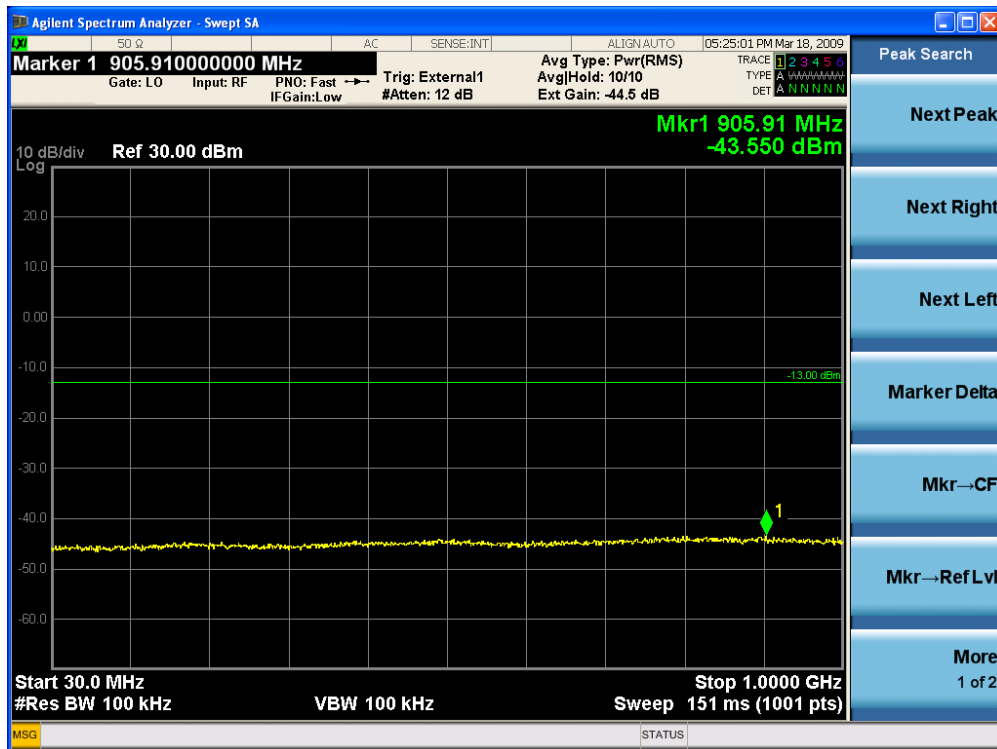

(30 MHz ~ 1 GHz)


(16QAM Low Channel)

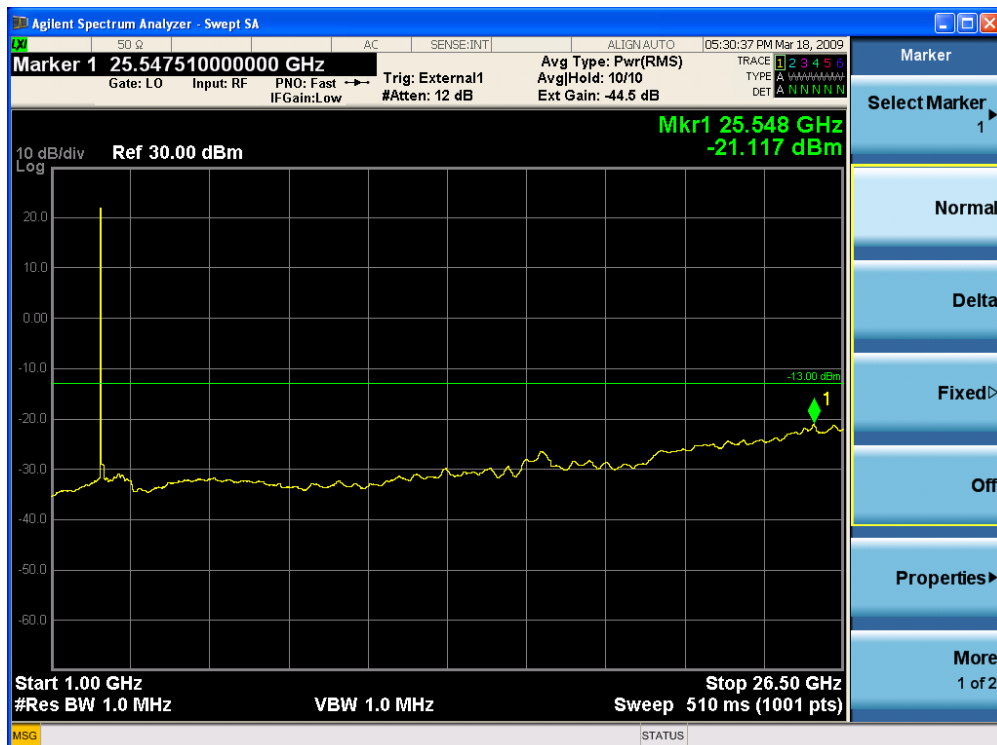

(1 GHz ~ 26.5 GHz)


HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 77 of 89

(16QAM Middle Channel)

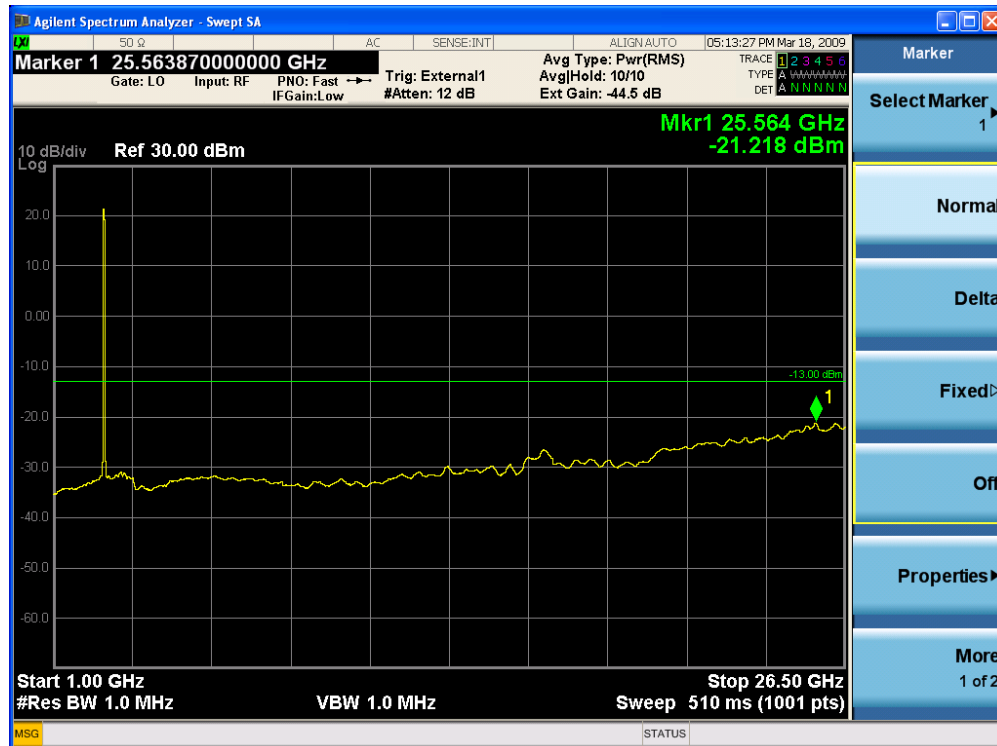

(1 GHz ~ 26.5 GHz)


(16QAM High Channel)

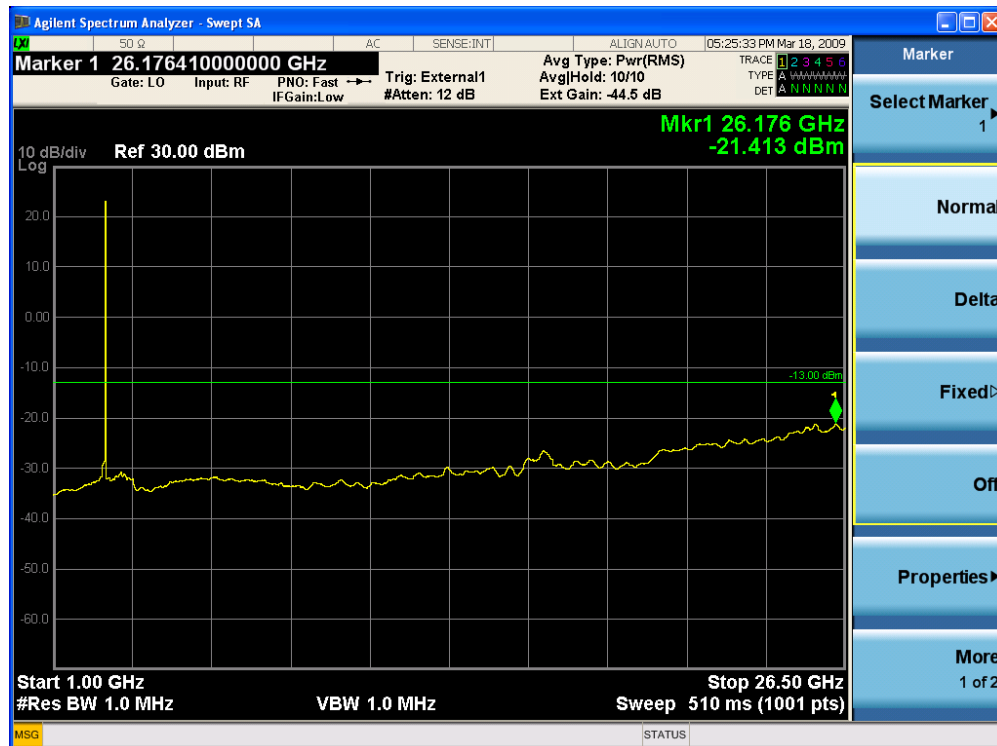

(1 GHz ~ 26.5 GHz)


HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 78 of 89

(64QAM Low Channel)

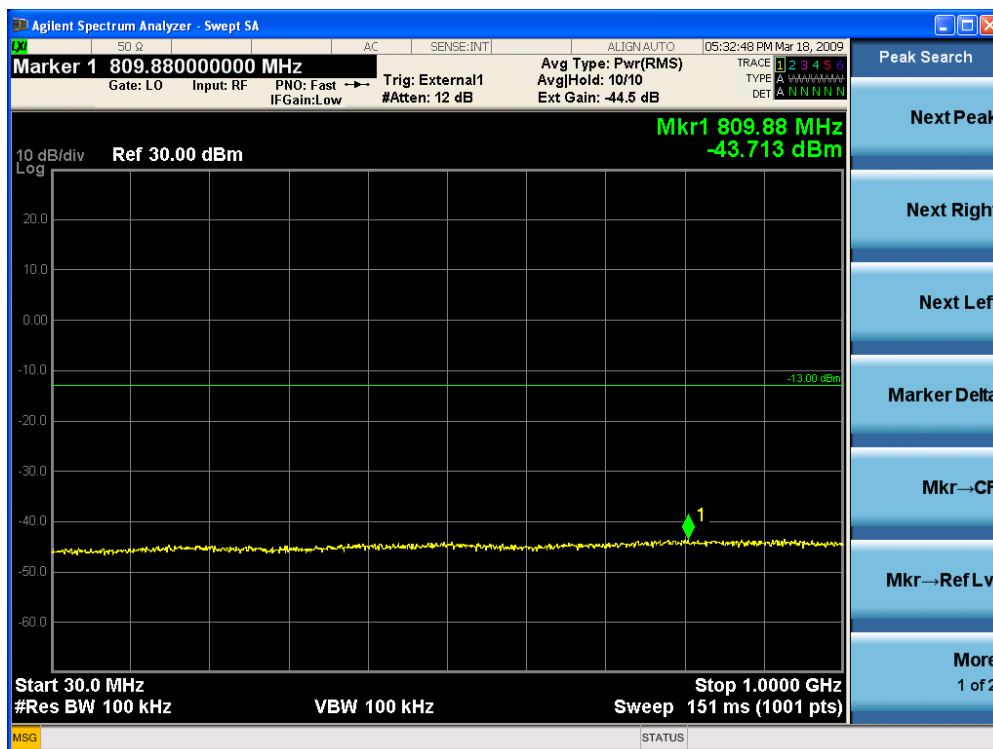

(30 MHz ~ 1 GHz)


(64QAM Middle Channel)

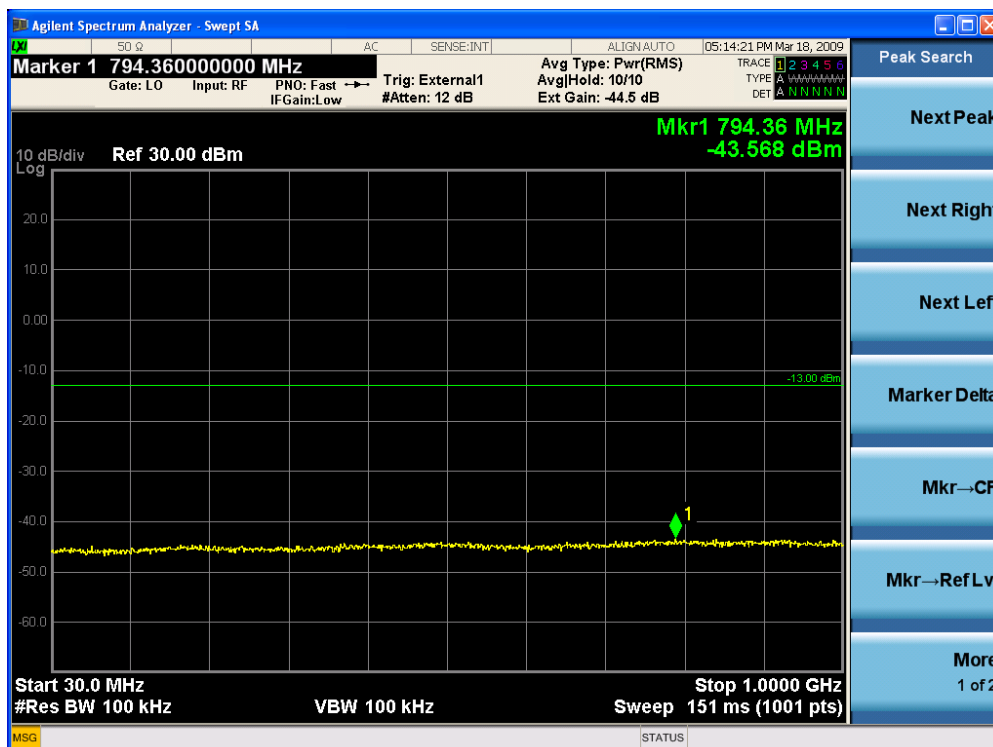

(30 MHz ~ 1 GHz)


HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 79 of 89

(64QAM High Channel)

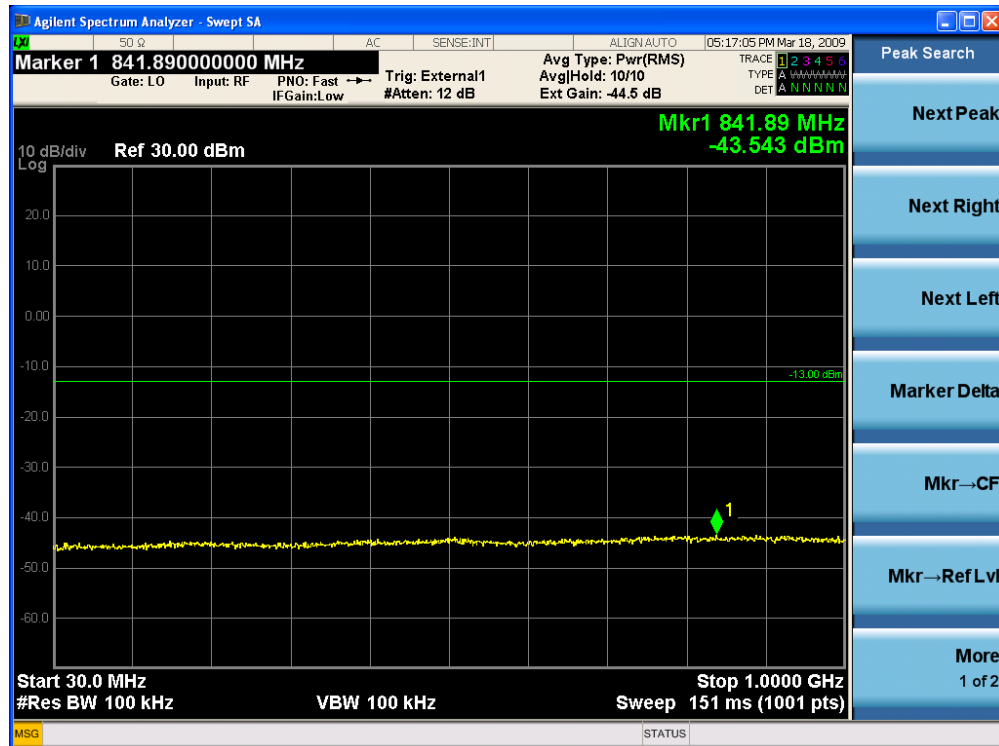

(30 MHz ~ 1 GHz)


(64QAM Low Channel)

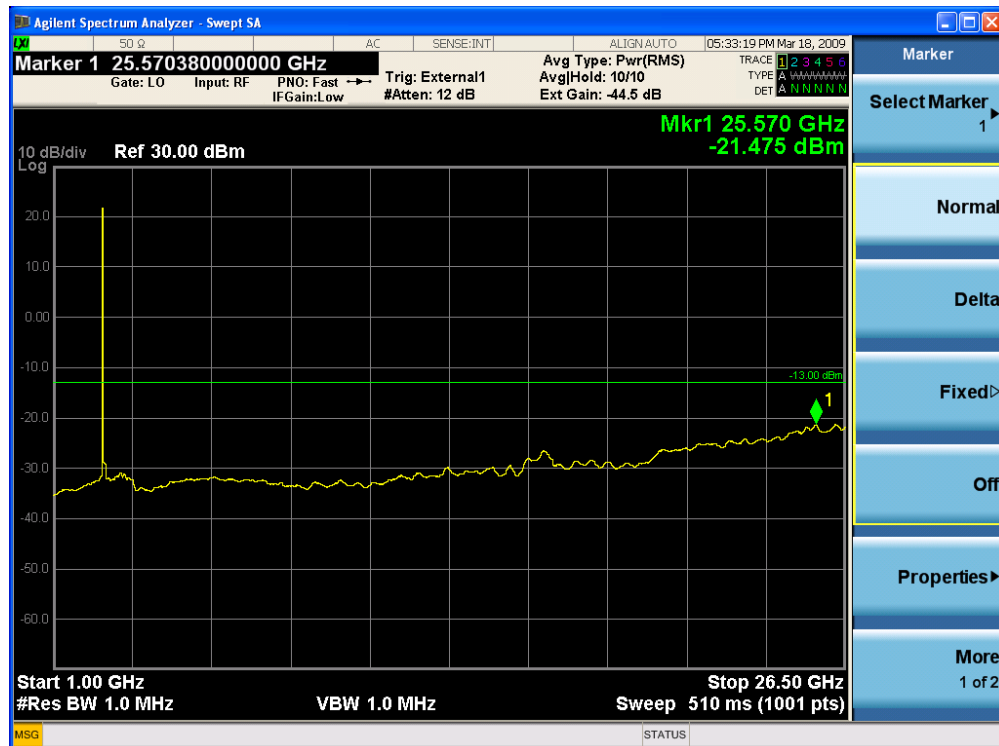

(1 GHz ~ 26.5 GHz)


HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 80 of 89

(64QAM Middle Channel)

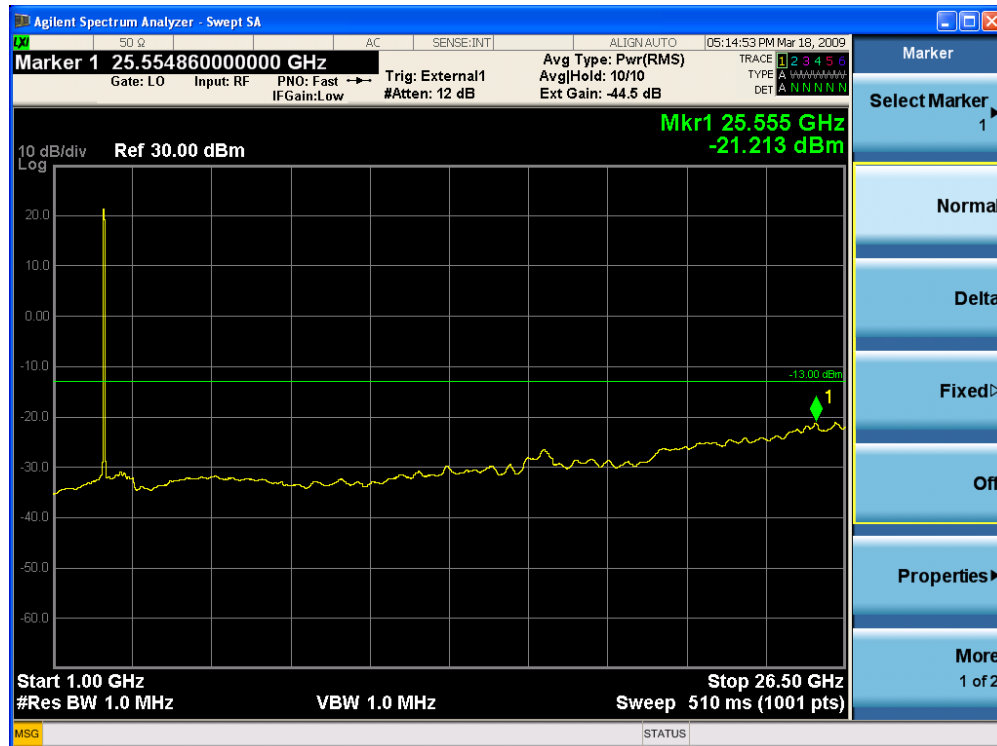

(1 GHz ~ 26.5 GHz)

(64QAM High Channel)

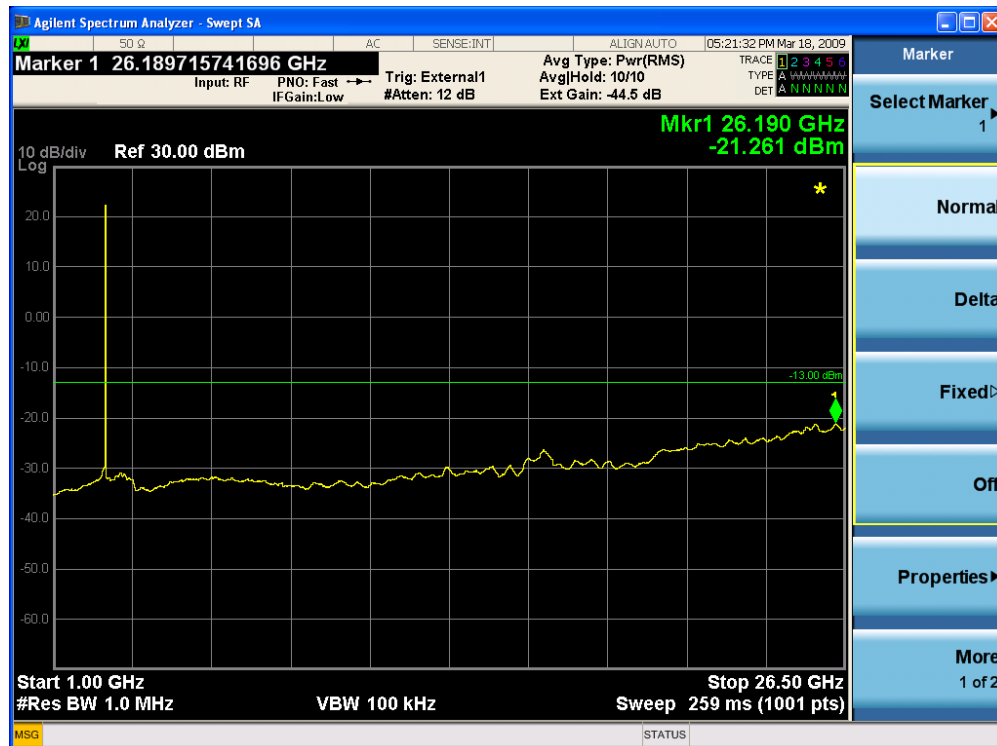

(1 GHz ~ 26.5 GHz)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 81 of 89

9. RADIATED SPURIOUS EMISSION

9.1 Applicable Standard:

Requirements: CFR 47, §2.1053

9.2 Test Equipment List and Details

Manufacturer	Model / Equipment	Serial No.	Calibration Due
Schwarzbeck	BBHA 9120D /Double Ridged Horn Antenna	296	03/30/2009
Schwarzbeck	BBHA 9120D /Double Ridged Horn Antenna	147	03/26/2010
Schwarzbeck	VULB 9160/ TRILOG Antenna	9160-3150	12/18/2010
Schwarzbeck	VULB 9160/ TRILOG Antenna	3125	05/16/2009
HD	MA240/ Antenna Position Tower	556	N/A
EMCO	1050/ Turn Table	114	N/A
HD GmbH	HD 100/ Controller	13	N/A
HD GmbH	KMS 560/ SlideBar	12	N/A
MITEQ	AMF-60-0010 1800-35-20P	1200937	05/20/2009
Agilent	E7405A/EMI Receiver	US40240209	12/10/2009

9.3 Test Procedure

Radiated emission test is according to ANSI/TIA-603-C-2004.

Radiated emission measurements were performed at an open Site.


The EUT was set at a distance of 3m from the receiving antenna. The EUT's RF ports were terminated to 50ohm load. The EUT was set to transmit at the low, mid and high channels of the transmitter frequency range at its maximum power level. The EUT was rotated about 360° and the receiving antenna scanned from 1-4m in order to capture the maximum emission.

A calibrated antenna source was positioned in place of the EUT and the previously recorded signal was duplicated.

The maximum EIRP of the emission was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and horizontal polarization. Harmonic emissions up to the 10th or 40GHz, whichever was the lesser, were investigated.

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 82 of 89

9.3.1 Radiated Spurious Emissions Test Setup

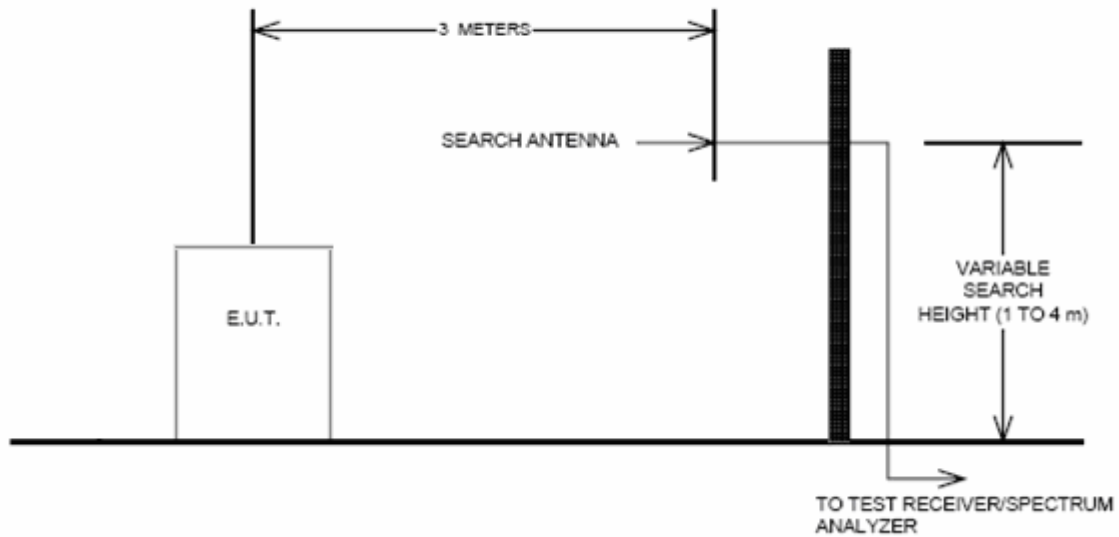

9.3.2 Environmental Conditions:

Temperature:	23 °C
Relative Humidity:	59 %

9.4 Test Result

: PASS (There were no emissions detected above the noise floor which was at least 20 dB below the limit.)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 83 of 89

10. FREQUENCY STABILITY

10.1 Applicable Standard

Requirements: FCC § 2.1055 (a), Part 27.54 following: The frequency stability shall be sufficient to ensure that the fundamental emissions stay

10.2 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Due Date
Agilent	Signal Analyzer	N9020A	US46220219	02/19/2010

10.3 Test Procedure

Frequency Stability over Temperature variation:

The equipment under test was connected to an external AC-DC power supply and the RF output was connected to a Spectrum Analyzer via feed-through attenuators. The EUT was placed inside the temperature chamber. RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 30 minutes, the frequency output was recorded from the VSA8960 S/W via MXA Signal Analyzer.

Frequency stability over Voltage variation:

An external variable AC-DC power supply Source. The voltage was set to 85% and 115% of the nominal value.

The output frequency was recorded for each voltage.

10.3.1. Environmental conditions

Temperature:	23° C
Relative Humidity:	52 %

10.4. Test Result

: Pass

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 84 of 89

10.4.1. Frequency Stability over Temperature and Voltage variation

Modulation: QPSK

Reference: - 48 Vdc at 20°C Freq. = 2645,000,000 MHz

Temperature (Celsius)	Measured Freq (MHz)	Drift (ppm)
50	2,644,999,938	-0.023
40	2,644,999,937	-0.024
30	2,644,999,919	-0.031
20	Reference-0.022	
10	2,644,999,942	-0.022
0	2,644,999,941	-0.022
-10	2,644,999,939	-0.023
-20	2,644,999,925	-0.028
-30	2,644,999,954	-0.017

Reference: - 48 Vdc at 20°C Freq. = 2645,000,000 MHz

Voltage(dc) +/-15% Ref	Measured Freq (MHz)	Drift (ppm)
40.8	2,644,999,923	-0.029
55.2	2,644,999,927	-0.028

(Output Port0 Middle CH)

Reference: - 48 Vdc at 20°C Freq. = 2645,000,000 MHz

Temperature (Celsius)	Measured Freq (MHz)	Drift (ppm)
50	2,644,999,915	-0.032
40	2,644,999,926	-0.028
30	2,644,999,934	-0.025
20	Reference	
10	2,644,999,933	-0.025
0	2,644,999,936	-0.024
-10	2,644,999,931	-0.026
-20	2,644,999,925	-0.028
-30	2,644,999,931	-0.026

Reference: - 48 Vdc at 20°C Freq. = 2645,000,000 MHz

Voltage(dc) +/-15% Ref	Measured Freq (MHz)	Drift (ppm)
40.8	2,645,999,925	-0.028
55.2	2,645,999,931	-0.026

(Output Port1 Middle CH)

Modulation: 16QAM**Reference: - 48 Vdc at 20°C Freq. = 2645,000,000 MHz**

Temperature (Celsius)	Measured Freq (MHz)	Drift (ppm)
50	2,644,999,919	-0.031
40	2,644,999,934	-0.025
30	2,644,999,928	-0.027
20	Reference	
10	2,644,999,940	-0.023
0	2,644,999,943	-0.022
-10	2,644,999,928	-0.027
-20	2,644,999,919	-0.031
-30	2,644,999,944	-0.021

Reference: - 48 Vdc at 20°C Freq. = 2645,000,000 MHz

Voltage(dc) +/-15% Ref	Measured Freq (MHz)	Drift (ppm)
40.8	2,644,999,937	-0.024
55.2	2,644,999,932	-0.026

(Output Port0 Middle CH)**Reference: - 48 Vdc at 20°C Freq. = 2645,000,000 MHz**

Temperature (Celsius)	Measured Freq (MHz)	Drift (ppm)
50	2,644,999,923	-0.029
40	2,644,999,948	-0.020
30	2,644,999,914	-0.033
20	Reference	
10	2,644,999,922	-0.029
0	2,644,999,939	-0.023
-10	2,644,999,941	-0.022
-20	2,644,999,946	-0.020
-30	2,644,999,951	-0.019

Reference: - 48 Vdc at 20°C Freq. = 2645,000,000 MHz

Voltage(dc) +/-15% Ref	Measured Freq (MHz)	Drift (ppm)
40.8	2,644,999,941	-0.021
55.2	2,644,999,919	-0.031

(Output Port1 Middle CH)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 86 of 89

Modulation: 64QAM**Reference: - 48 Vdc at 20°C Freq. = 2645,000,000 MHz**

Temperature (Celsius)	Measured Freq (MHz)	Drift (ppm)
50	2,644,999,933	-0.025
40	2,644,999,919	-0.031
30	2,644,999,927	-0.028
20	Reference	
10	2,644,999,916	-0.032
0	2,644,999,926	-0.028
-10	2,644,999,921	-0.030
-20	2,644,999,931	-0.026
-30	2,644,999,942	-0.022

Reference: - 48 Vdc at 20°C Freq. = 2645,000,000 MHz

Voltage(dc) +/-15% Ref	Measured Freq (MHz)	Drift (ppm)
40.8	2,644,999,923	-0.029
55.2	2,644,999,917	-0.031

(Output Port0 Middle CH)**Reference: - 48 Vdc at 20°C Freq. = 2645,000,000 MHz**

Temperature (Celsius)	Measured Freq (MHz)	Drift (ppm)
50	2,644,999,936	-0.024
40	2,644,999,943	-0.022
30	2,644,999,925	-0.028
20	Reference	
10	2,644,999,934	-0.025
0	2,644,999,946	-0.020
-10	2,644,999,933	-0.025
-20	2,644,999,927	-0.028
-30	2,644,999,939	-0.023

Reference: - 48 Vdc at 20°C Freq. = 2645,000,000 MHz

Voltage(dc) +/-15% Ref	Measured Freq (MHz)	Drift (ppm)
40.8	2,644,999,922	-0.029
55.2	2,644,999,931	-0.026

(Output Port1 Middle CH)

HCT PT.27 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-RF09-0316	Test Dates: March 25, 2009	EUT Type: Mobile WiMAX Outdoor RAS	FCC ID: A3LSPI-2213282600	Page 87 of 89

11. RF Exposure Statement

1. LIMITS

According to §1.1310 and §2.1091 RF exposure is calculated.

(B) Limits for General Population/Uncontrolled Exposures

Frequency range (MHz)	Electric field Strength (V/m)	Magnetic field Strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
0.3 - 1.34.....	614	1.63	*(100)	30
1.34 - 30.....	824/f	2.19/f	*(180/ f ²)	30
30 - 300.....	27.5	0.073	0.2	30
300 - 1500.....			f/1500	30
1500 - 100.000.....			1.0	30

F = frequency in MHz

* = Plane-wave equivalent power density

2. MAXIMUM PERMISSIBLE EXPOSURE Prediction

Prediction of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

S = Power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

Max Peak output Power at antenna input terminal	36.22000	dBm
Max Peak output Power at antenna input terminal	4187.93565	mW
Prediction distance	30.00000	cm
Prediction frequency	2645.00000	MHz
Antenna Gain(typical)	4.00000	dBi
Antenna Gain(numeric)	2.51189	–
Power density at prediction frequency (S)	0.93014	mW/cm ²
MPE limit for uncontrolled exposure at prediction frequency	1.00000	mW/cm ²

3. RESULTS

The power density level at 30 cm is 0.93014 mW/cm², which is below the uncontrolled exposure limit of 1.0 mW/cm² at 2645 MHz.